

TEST REPORT

Applicant : Sharp Corporation, Communication Systems Division
Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN

Products : Smart Phone
Model No. : SH-03G
SERIAL NO. : 004401115391548
004401115391555
004401115391563

FCC ID : APYHRO00217

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : March 9 ~23, 2015



A handwritten signature in black ink, likely belonging to Kousei Shibata, the Manager of the KITA-KANSAI Testing Center.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure.....	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Details of the Equipment Under Test	6
7 Details of the Test Item.....	11

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Smart Phone
3. Model No. : SH-03G
4. Serial No. : 004401115391548
004401115391555
004401115391563
5. Product Type : Pre-production
6. Date of Manufacture : January, 2015
7. Power Rating : 4.0VDC (Lithium-ion Battery UBATIA258AFN1 3000mAh)
8. EUT Grounding : None
9. Operating Frequency : 5180.0 MHz(36CH) –5700.0MHz(140CH): IEEE802.11a/n/ac(20MHz)
5190.0 MHz(38CH) –5670.0MHz(134CH): IEEE802.11n/ac(40MHz)
5210.0 MHz(42CH) –5610.0MHz(122CH): IEEE802.11ac(80MHz)
10. Modulation : OFDM
11. Antenna type : Inverted-L Type Antenna (Integral)
12. Antenna Gain : 0 dBi (ANT0/ANT1)
13. Category : Spread Spectrum Transmitter(OFDM)/UNII*
14. EUT Authorization : Certification
15. Received Date of EUT : March 6, 2015

*The 80MHz BW + 80MHz BW mode is not supported. The EUT does not apply the contiguous 80 MHz BW mode and the straddled operations.

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15 – Radio Frequency Devices
Subpart E – Unlicensed National Information Infrastructure Devices

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

☒ - The test result was **passed** for the test requirements of the applied standard.

☐ - The test result was **failed** for the test requirements of the applied standard.

☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

The tests documented in this report were performed in accordance with
CFR 47 FCC Rules and Regulations Part 15
Subpart E – Unlicensed National Information Infrastructure Devices

ANSI C63.10–2009

Testing unlicensed wireless devices.

KDB 789033 D02

General UNII Test Procedures New Rules v01: June 6, 2014

KDB 905462 D02

UNII DFS Compliance Procedures New Rules v01r01: August 14, 2014

KDB 644545 D03

Guidance for IEEE 802 11ac New Rules v01: August 14, 2014

KDB 662911 D01

Multiple Transmitter Output v02r01: October 31, 2013

4 Test Location

Japan Quality Assurance Organization (JQA)

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)

VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)

BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)

IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Details of the Equipment Under Test

6.1 Operating Condition

Test Voltage : 4.0VDC (Internal Lithium-ion Battery UBATIA258AFN1 3000mAh)

Operation Mode :

The EUT is set with the test mode, the specification of the test mode is as followings.

Transmitting frequency : 5180.0 MHz(36CH) – 5700.0MHz(140CH): IEEE802.11a/n/ac(20MHz)
: 5190.0 MHz(38CH) – 5670.0MHz(134CH): IEEE802.11n/ac(40MHz)
: 5210.0 MHz(42CH) – 5610.0MHz(122CH): IEEE802.11ac(80MHz)
Receiver frequency : 5180.0 MHz(36CH) – 5700.0 MHz(140CH)

Modulation Type

1. 802.11a : OFDM
2. 802.11n/ac(20MHz) : OFDM
3. 802.11n/ac(40MHz) : OFDM
3. 802.11ac(80MHz) : OFDM

The equipment has two antennas(ANT0/ANT1), and uses the MIMO technology.

This equipment works only in 2TX(ANT0+ANT1) mode, and it does not operate in 1TX mode.

Therefore, the radiated emission tests were carried out in the following mode.

2TX (ANT0+ANT1)

Other Clock Frequency

19.2MHz, 48MHz, 12MHz, 27.12MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

DIRECTIONAL ANTENNA GAIN

For Power: The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

ANT0 Antenna Gain [dBi]	ANT1 Antenna Gain [dBi]	Uncorrelated Chains Directional Gain [dBi]
0.00	0.00	0.00

For PSD: The TX chains are correlated. The directional gain is:

ANT0 Antenna Gain [dBi]	ANT1 Antenna Gain [dBi]	Correlated Chains Directional Gain [dBi]
0.00	0.00	3.01

6.2 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	SH-03G	004401115391548*1) 004401115391555*2) 004401115391563*3)	APYHRO00217
B	AC Adapter	Fujitsu Corporation	05	XFA	N/A
C	Stereo Handsfree	Sharp	SHLDL1	--	N/A
D	DTV Antenna	Sharp	SH01	--	N/A

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission

*3) Used for DFS Measurement

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	YES	1.2
2	Handsfree Cable	--	--	NO	NO	1.5
3	DTV Antenna Cable	--	--	NO	NO	0.3

6.3 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

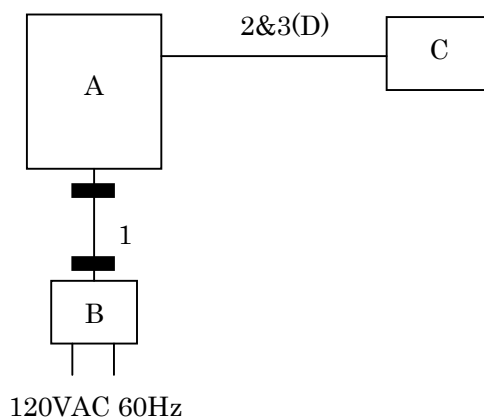

c) Earphone used

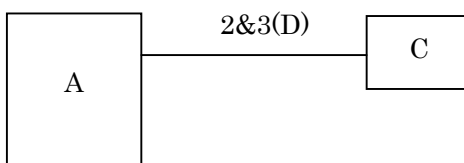

 : Ferrite Core

6.4 Maximum Output Power

The preliminary maximum peak conducted output power measurements were performed each TX rate and maximum value are listed as followings.

802.11a

Channel	36	44	48	52	56	64	100	116	140
Frequency(MHz)	5180	5220	5240	5260	5280	5320	5500	5580	5700
Power(dBm)	12.83	12.66	12.62	12.57	12.70	12.62	12.57	12.60	12.74

The TX rate 6Mbps was maximum case.(MCS0)

802.11n (20MHz BW)

Channel	36	44	48	52	56	64	100	116	140
Frequency(MHz)	5180	5220	5240	5260	5280	5320	5500	5580	5700
Power(dBm)	12.50	12.38	12.35	12.28	12.42	12.35	12.32	12.34	12.48

The TX rate 6.5Mbps was maximum case.(MCS0)

802.11n (40MHz BW)

Channel	38	46	54	62	102	134
Frequency(MHz)	5190	5230	5270	5310	5510	5670
Power(dBm)	12.80	12.70	12.62	12.69	12.65	12.87

The TX rate 13.5Mbps was maximum case.(MCS0)

802.11ac(80MHz BW)

Channel	42	58	106	122
Frequency(MHz)	5210	5290	5530	5610
Power(dBm)	12.40	12.32	12.20	12.35

The TX rate 29.3Mbps was maximum case.(MCS0)

All test cases were performed to the highest RF output power data rate listed above.

7 Details of the Test Item

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.11	Passed	-
26dB Bandwidth	Section 15.407(2)(3)	Section 7.1	-	-
Maximum Conducted Output Power	Section 15.407(a)(1)(iv), (2),(3)	Section 7.2	Passed	For mobile and portable client device
Peak Power Spectral Density	Section 15.407(a)(1)(iv), (2),(3)	Section 7.3	Passed	For mobile and portable client device
Peak Excursion	--	Section 7.4	N/A	-
AC Powerline Conducted Emission	Section 15.407(b)(6) Section 15.207	Section 7.5	Passed	-
Unwanted Radiated Emission	Section 15.407(b) Section 15.205 Section 15.209	Section 7.6	Passed	-
Dynamic Frequency Selection	Section 15.407(h)(2)	Section 7.7	Passed	-

7.1 26dB Bandwidth

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☒ - Not judged

7.1.1 Worst Point and Measurement Uncertainty

Reporting Purpose (No limitation applied)

Uncertainty of Measurement Results +/- 0.9 %

Remarks : _____

7.1.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.1.3 Test Method and Test Setup (Diagrammatic illustration)

The occupied bandwidth measurements were carried out connecting to the spectrum analyzer.


The spectrum analyzer was set in accordance with KDB 789033 D02 as follows:

The RBW was set approximately 1% of the emission bandwidth.

Set the VBW > RBW., Detector = Peak, and Trace mode = max hold.

The bandwidth function in the analyzer was used.

(referred documentation is No. G70364M)

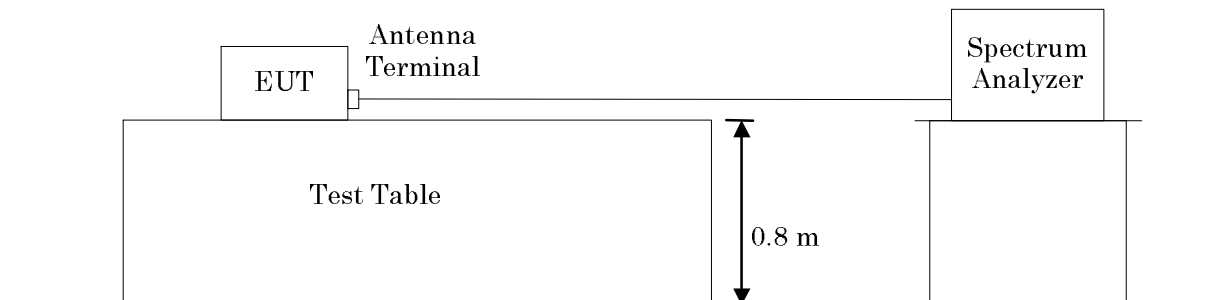

7.1.4 Test Data

7.1.4.1 802.11a 26dB/ 99% OBW

Test Date : March 11, 2015

Temp.: 21°C, Humi: 25%


a) Antenna 1 (ANT0)

Mode of EUT: TX 802.11a


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	18.903	16.239
44	5220	18.822	16.229
48	5240	18.811	16.219
52	5260	18.802	16.230
56	5280	18.679	16.245
64	5320	18.793	16.229
100	5500	18.445	16.237
116	5580	18.713	16.269
140	5700	18.560	16.269

802.11a 36ch (5180 MHz)

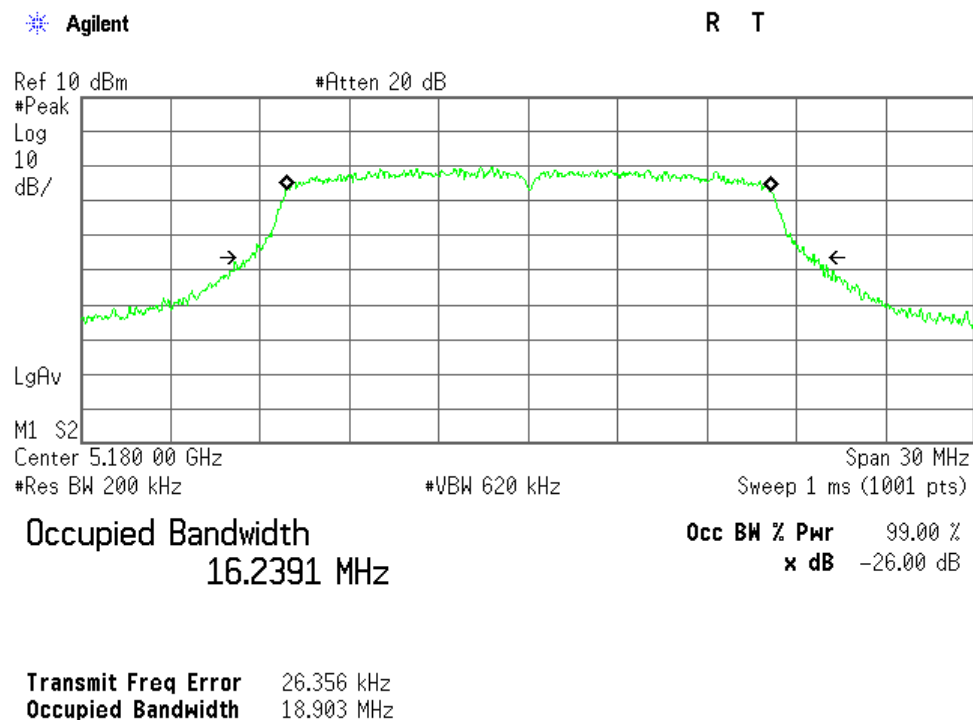


802.11a 44ch (5220 MHz)

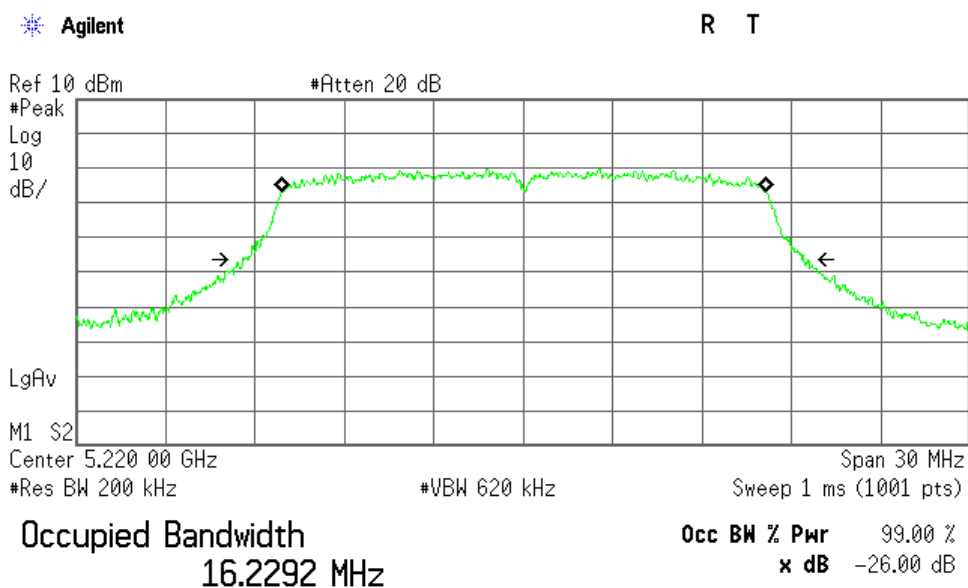


Transmit Freq Error 33.361 kHz
Occupied Bandwidth 18.822 MHz

802.11a 48ch (5240 MHz)

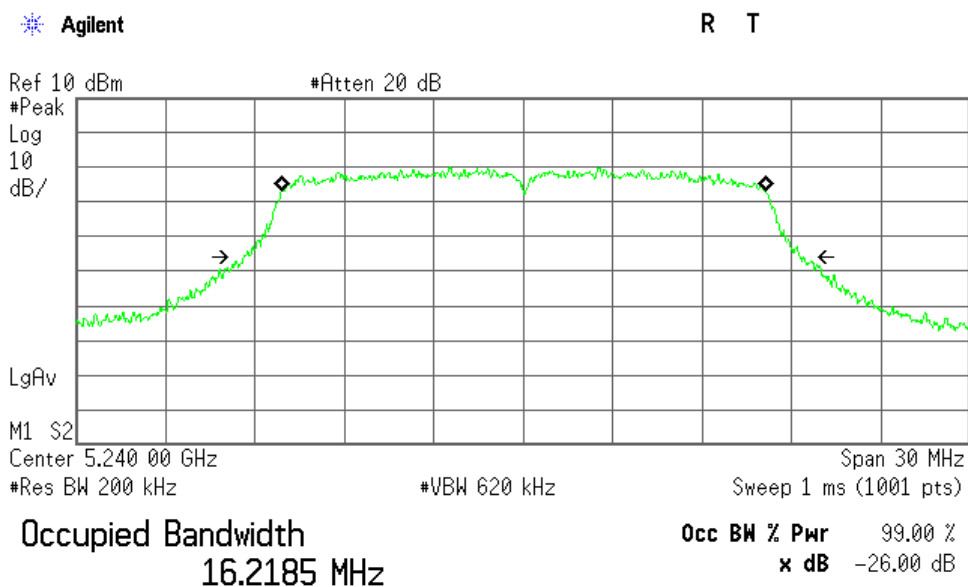


Transmit Freq Error 29.277 kHz
Occupied Bandwidth 18.811 MHz

802.11a 52ch (5260 MHz)

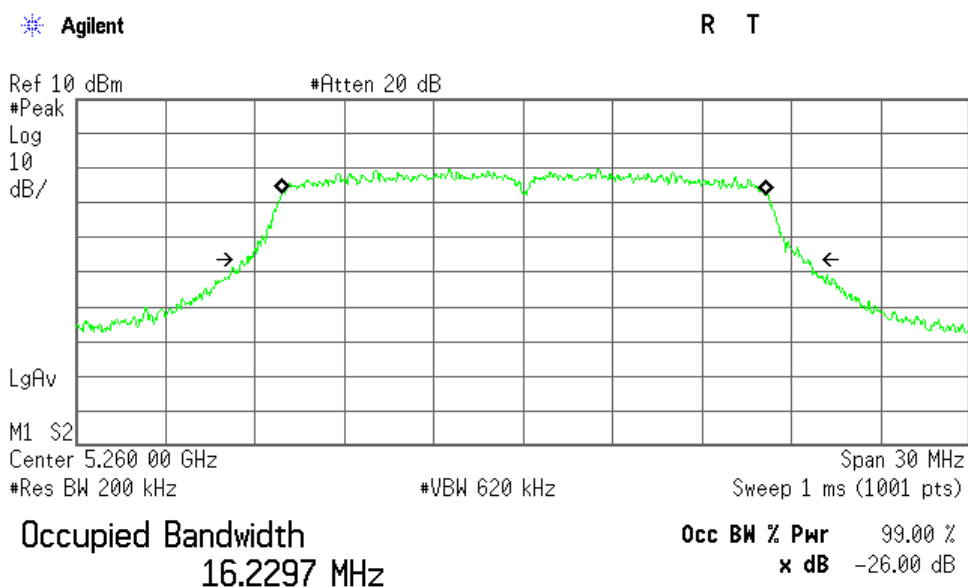


Transmit Freq Error 40.963 kHz
Occupied Bandwidth 18.802 MHz

802.11a 56ch (5280 MHz)

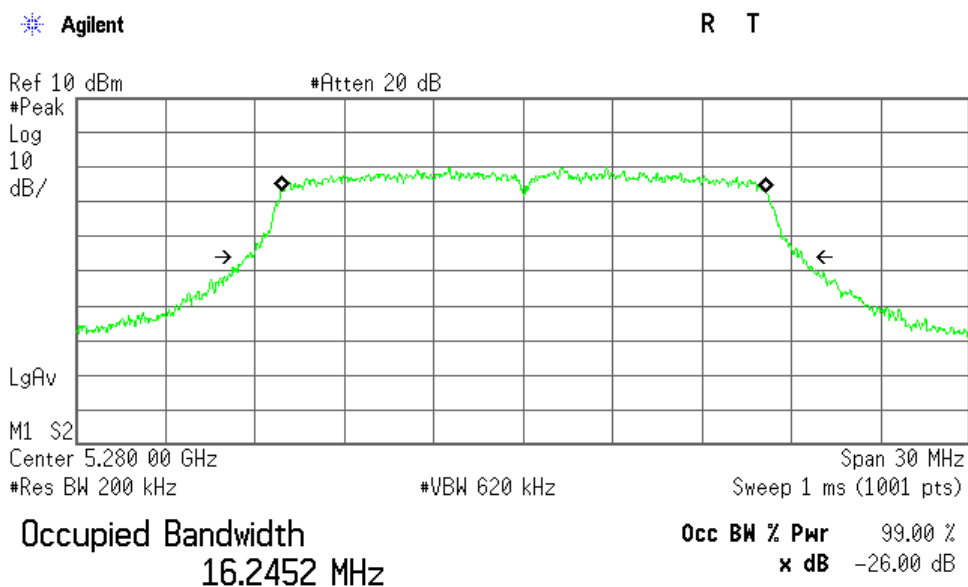


Transmit Freq Error 32.992 kHz
Occupied Bandwidth 18.679 MHz

802.11a 64ch (5320 MHz)

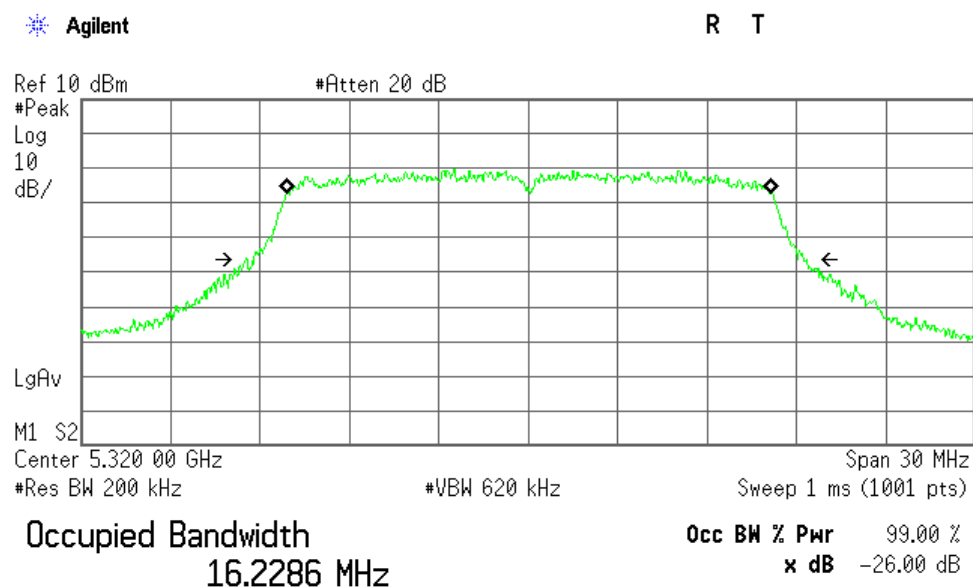


Transmit Freq Error 37.105 kHz
Occupied Bandwidth 18.793 MHz

802.11a 100ch (5500 MHz)

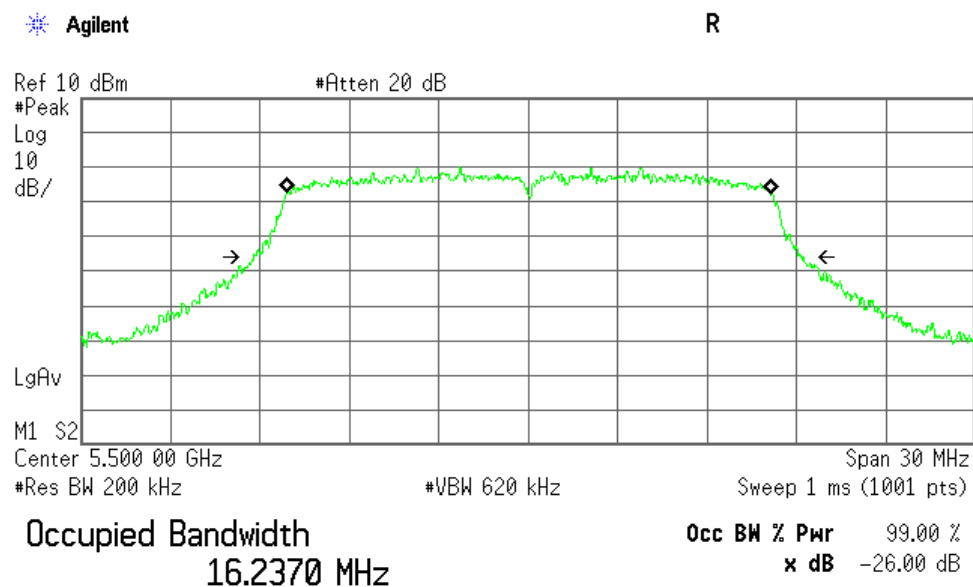


Transmit Freq Error 41.747 kHz
Occupied Bandwidth 18.445 MHz

802.11a 116ch (5580 MHz)

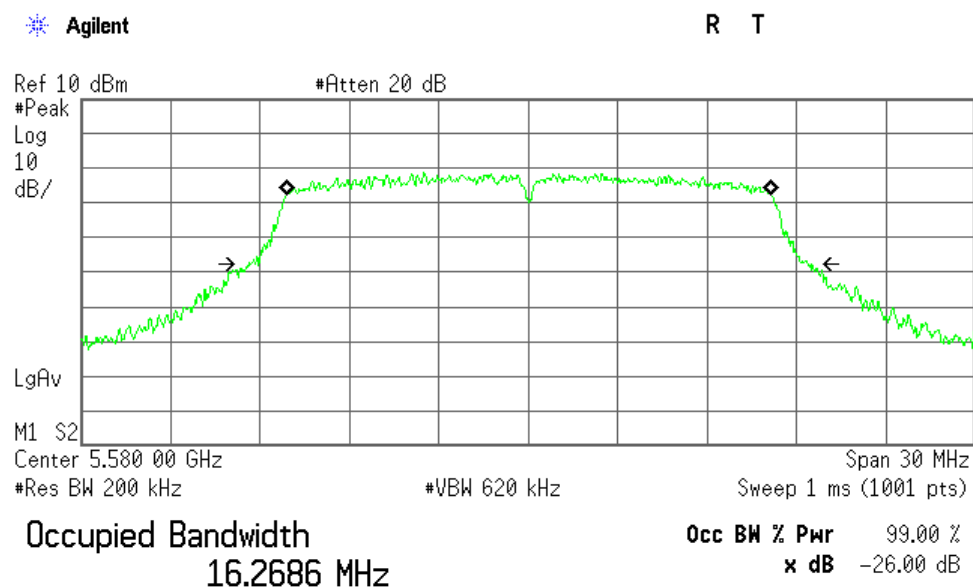

Transmit Freq Error 34.269 kHz
Occupied Bandwidth 18.713 MHz

802.11a 140ch (5700 MHz)

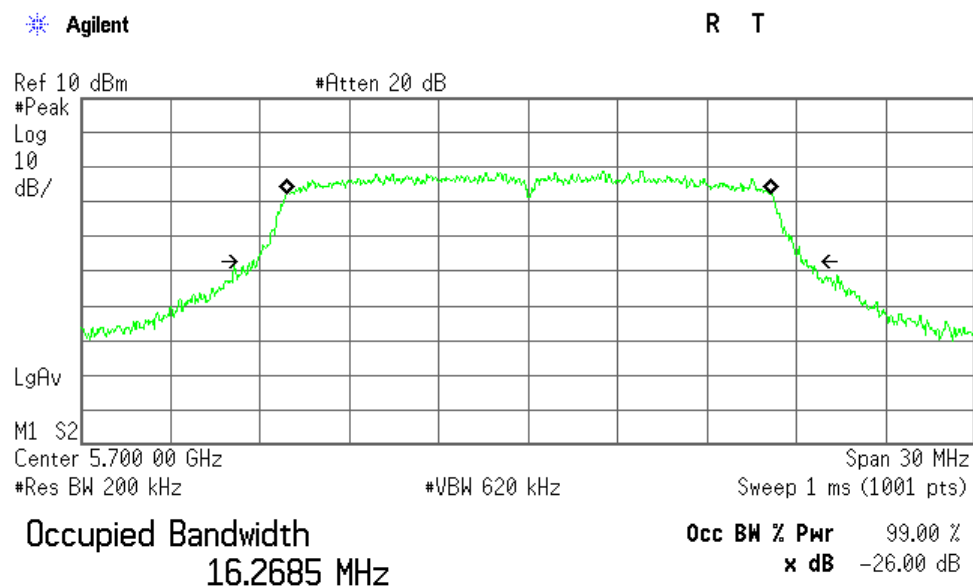

Transmit Freq Error 25.461 kHz
Occupied Bandwidth 18.560 MHz


b) Antenna 2 (ANT1)

Mode of EUT: TX 802.11a


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	18.670	16.266
44	5220	18.592	16.245
48	5240	18.716	16.254
52	5260	18.544	16.251
56	5280	18.708	16.250
64	5320	18.220	16.241
100	5500	18.708	16.256
116	5580	18.331	16.243
140	5700	18.549	16.268

802.11a 36ch (5180 MHz)

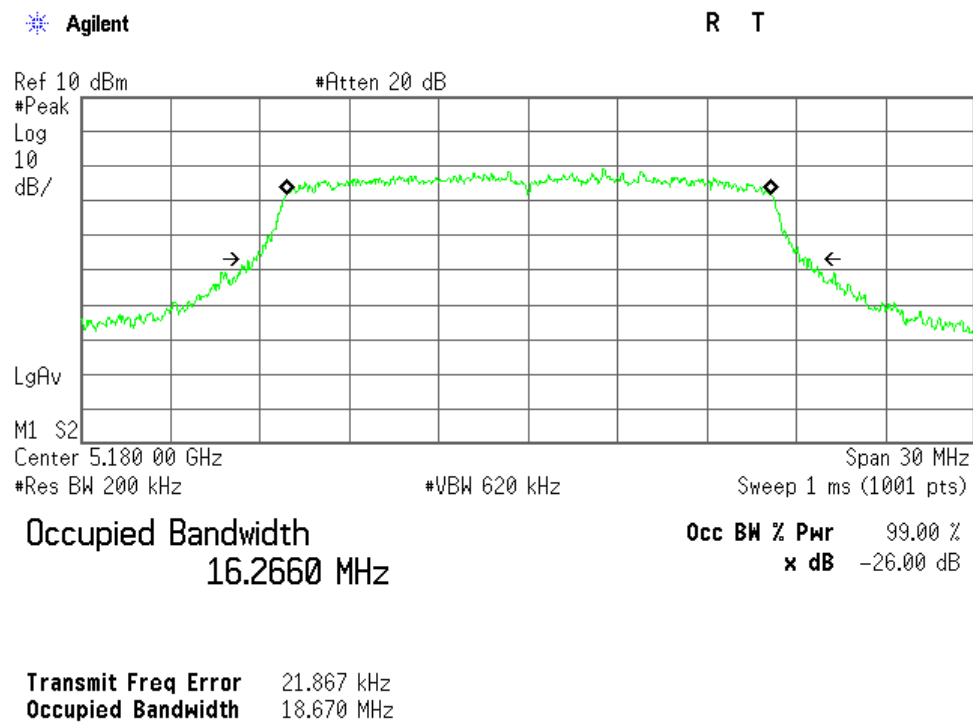


802.11a 44ch (5220 MHz)

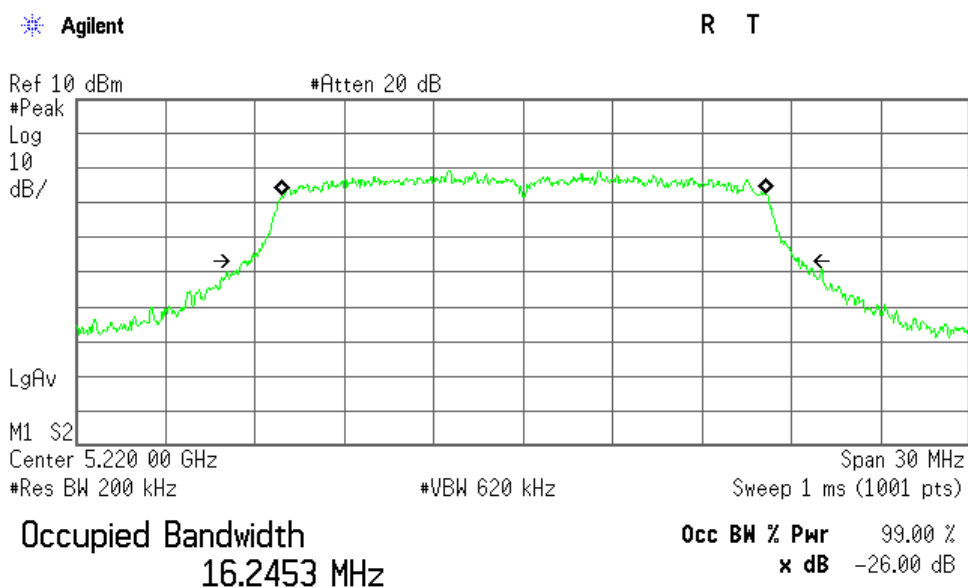


Transmit Freq Error 29.552 kHz
Occupied Bandwidth 18.592 MHz

802.11a 48ch (5240 MHz)

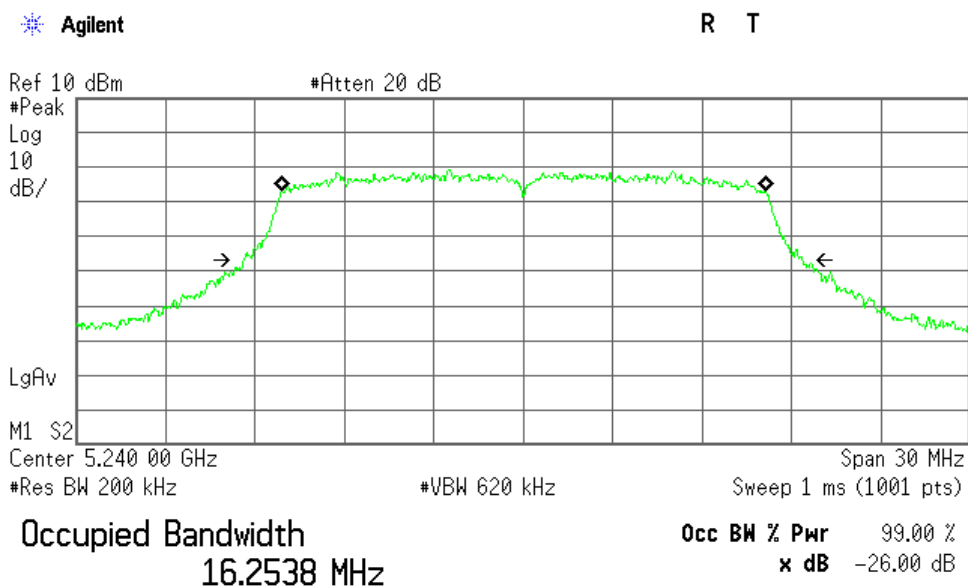


Transmit Freq Error 26.272 kHz
Occupied Bandwidth 18.716 MHz

802.11a 52ch (5260 MHz)

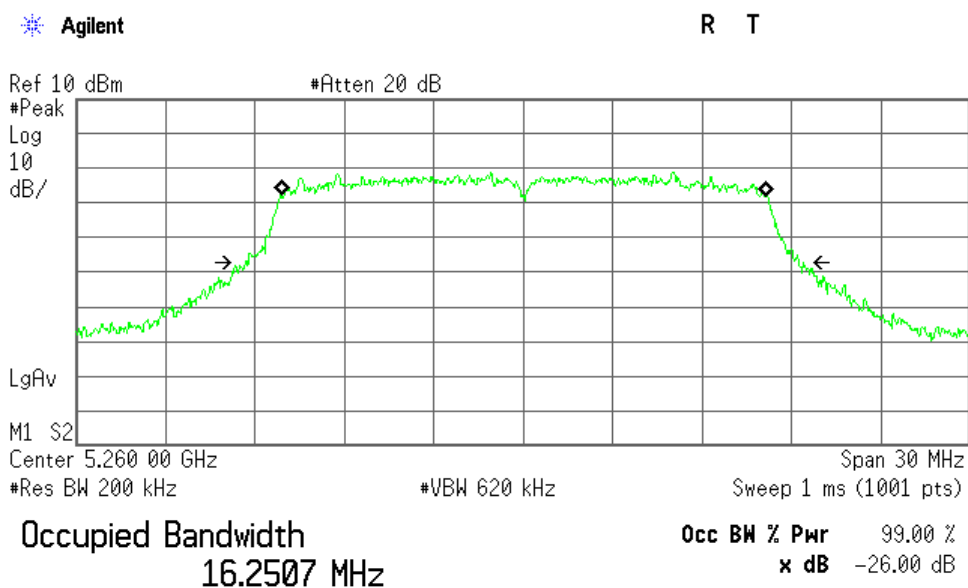


Transmit Freq Error 21.378 kHz
Occupied Bandwidth 18.544 MHz

802.11a 56ch (5280 MHz)

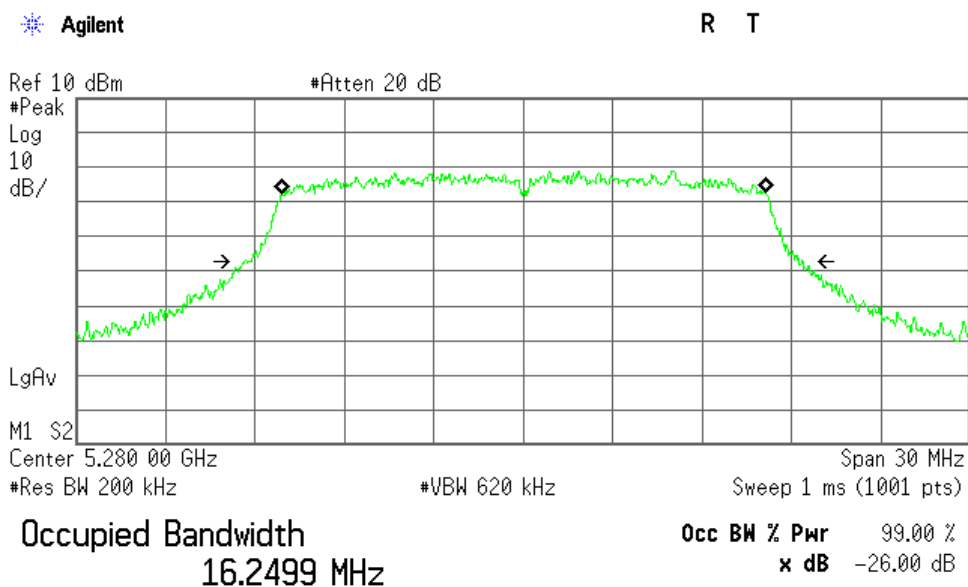


Transmit Freq Error 23.055 kHz
Occupied Bandwidth 18.708 MHz


802.11a 64ch (5320 MHz)

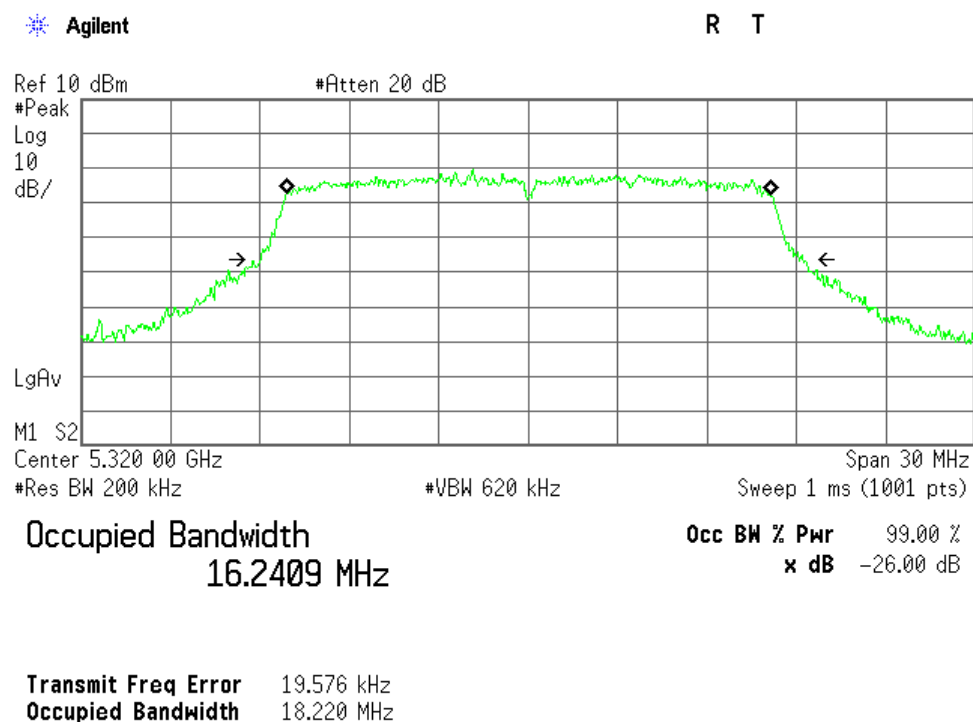

802.11a 100ch (5500 MHz)

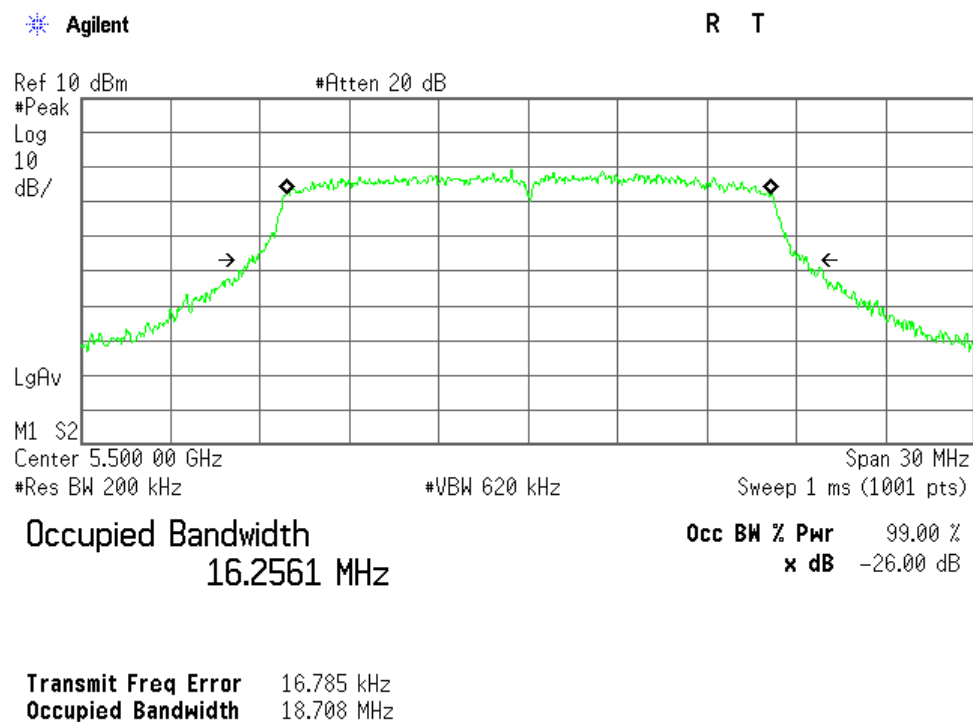


802.11a 116ch (5580 MHz)

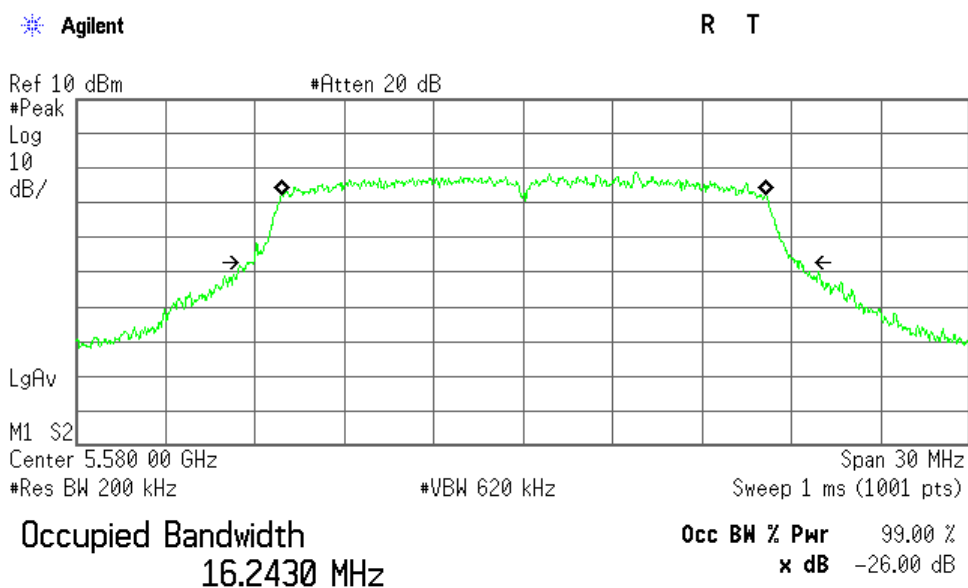

Transmit Freq Error 20.912 kHz
Occupied Bandwidth 18.331 MHz

802.11a 140ch (5700 MHz)

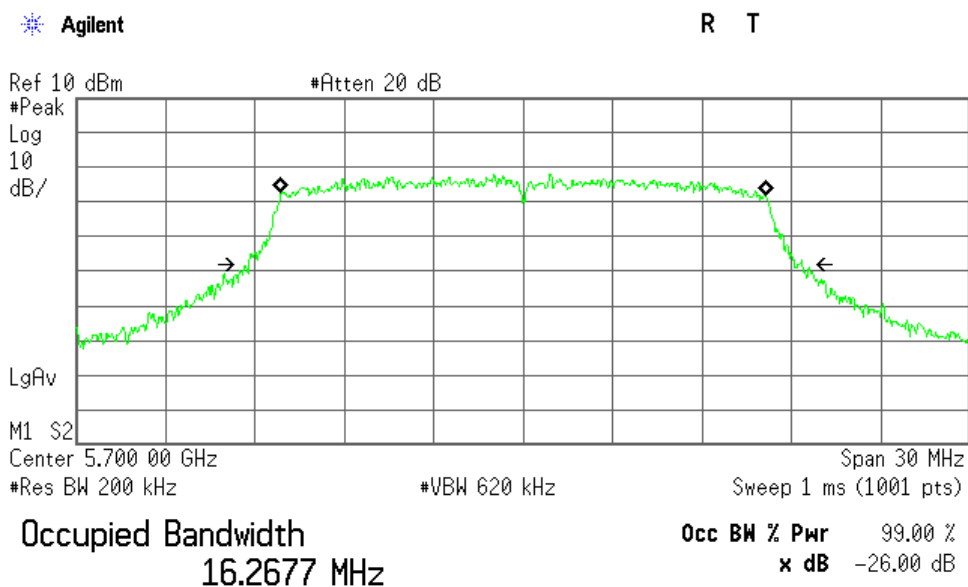

Transmit Freq Error 10.851 kHz
Occupied Bandwidth 18.549 MHz

7.1.4.2 802.11n (20 MHz BW) 26dB/ 99% OBW


a) Antenna 1 (ANT0)

Mode of EUT: Tx 802.11n(20 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	19.687	17.412
44	5220	19.848	17.311
48	5240	19.330	17.379
52	5260	19.695	17.341
56	5280	19.389	17.378
64	5320	19.398	17.342
100	5500	20.183	17.359
116	5580	19.550	17.394
140	5700	19.775	17.363

802.11n (20 MHz) 36ch (5180 MHz)

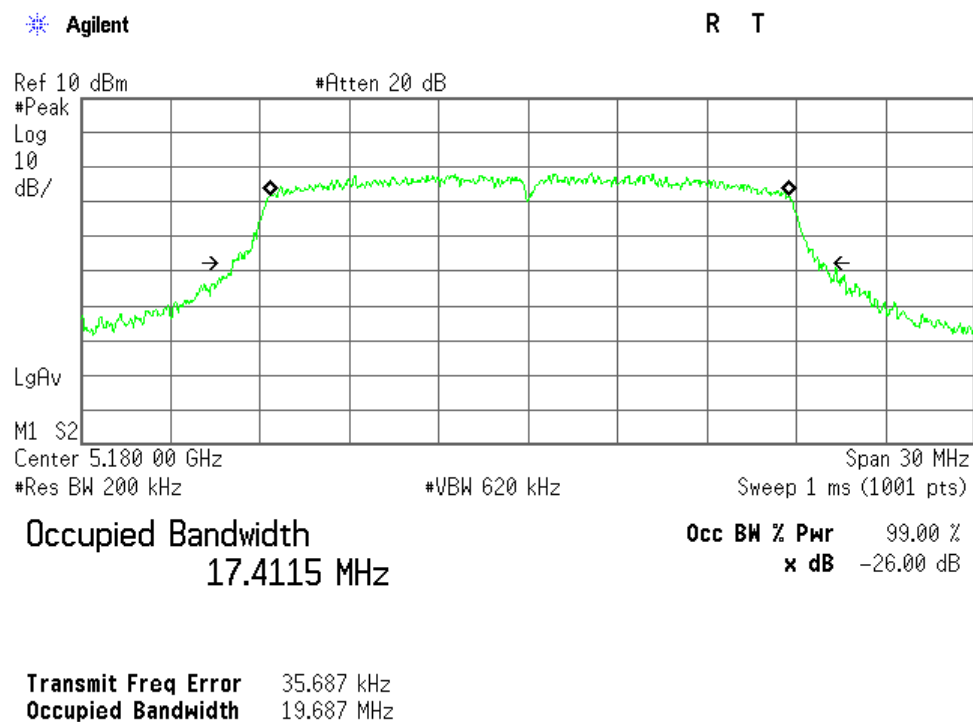


802.11n (20 MHz) 44ch (5220 MHz)

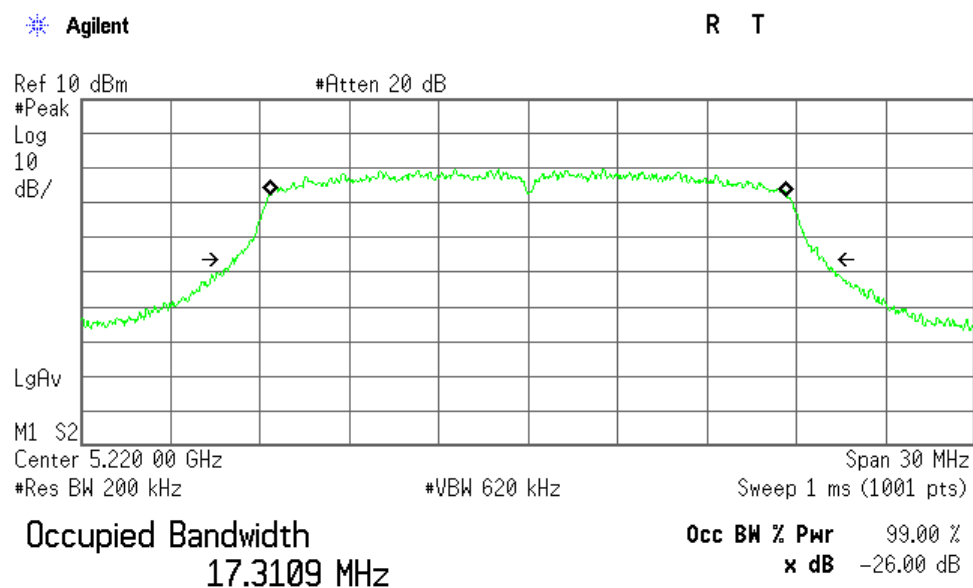


Transmit Freq Error 23.279 kHz
Occupied Bandwidth 19.848 MHz

802.11n (20 MHz) 48ch (5240 MHz)

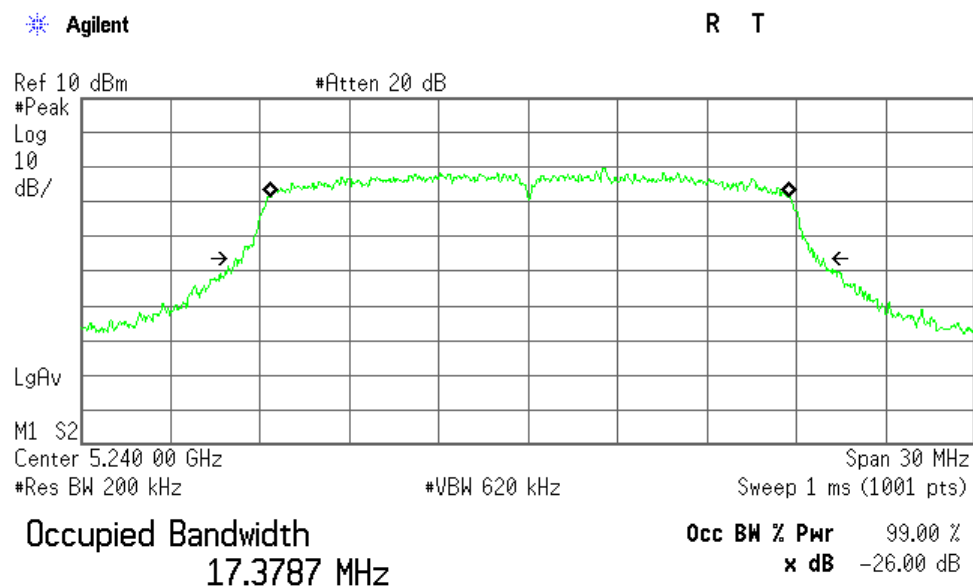


Transmit Freq Error 34.574 kHz
Occupied Bandwidth 19.330 MHz

802.11n (20 MHz) 52ch (5260 MHz)

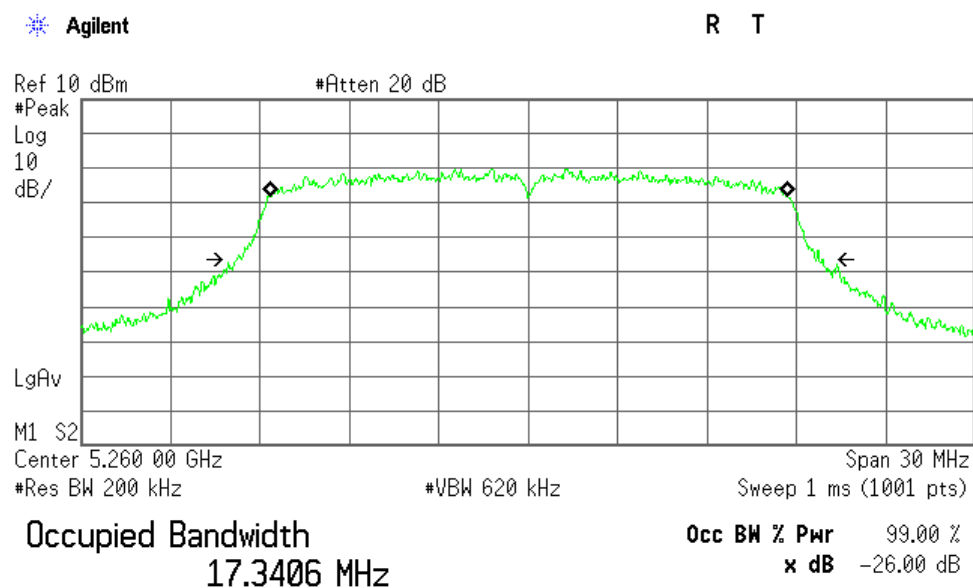


Transmit Freq Error 30.362 kHz
Occupied Bandwidth 19.695 MHz

802.11n (20 MHz) 56ch (5280 MHz)

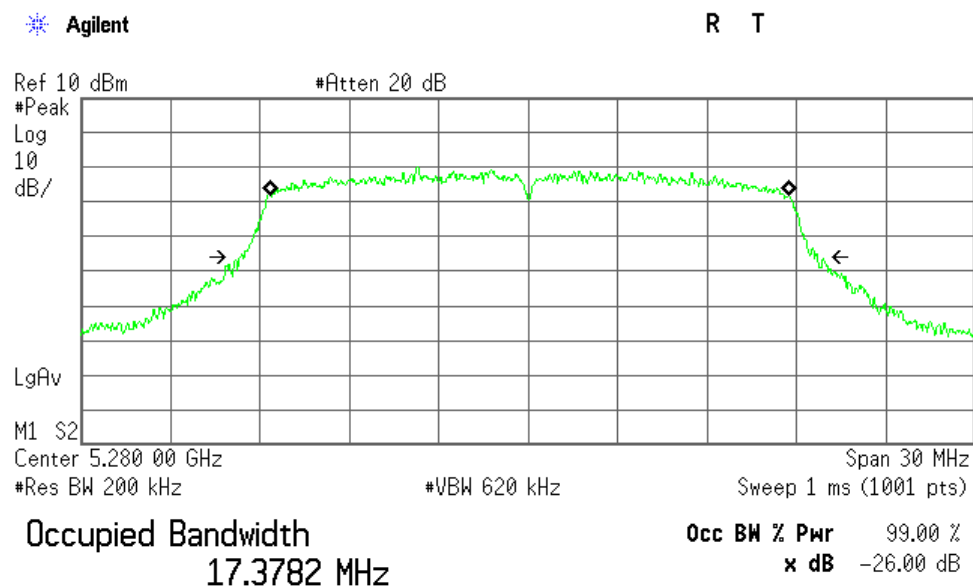


Transmit Freq Error 34.719 kHz
Occupied Bandwidth 19.389 MHz

802.11n (20 MHz) 64ch (5320 MHz)

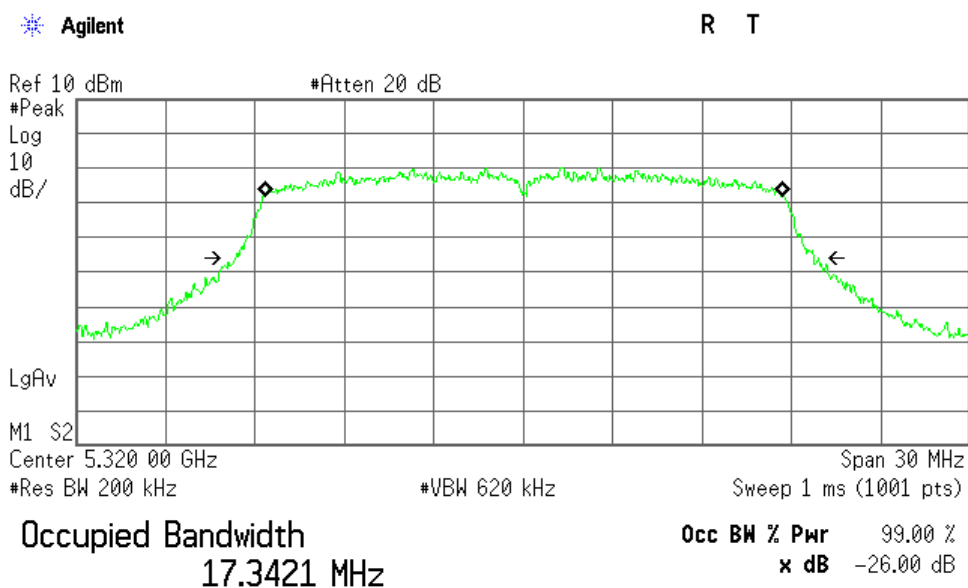


Transmit Freq Error 34.813 kHz
Occupied Bandwidth 19.398 MHz

802.11n (20 MHz) 100ch (5500 MHz)

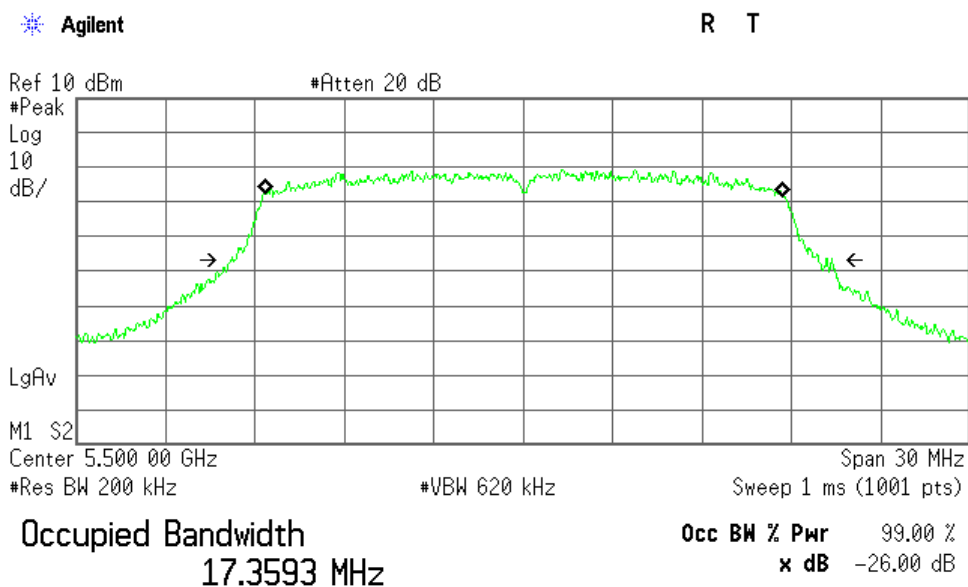


Transmit Freq Error 33.441 kHz
Occupied Bandwidth 20.183 MHz

802.11n (20 MHz) 116ch (5580 MHz)

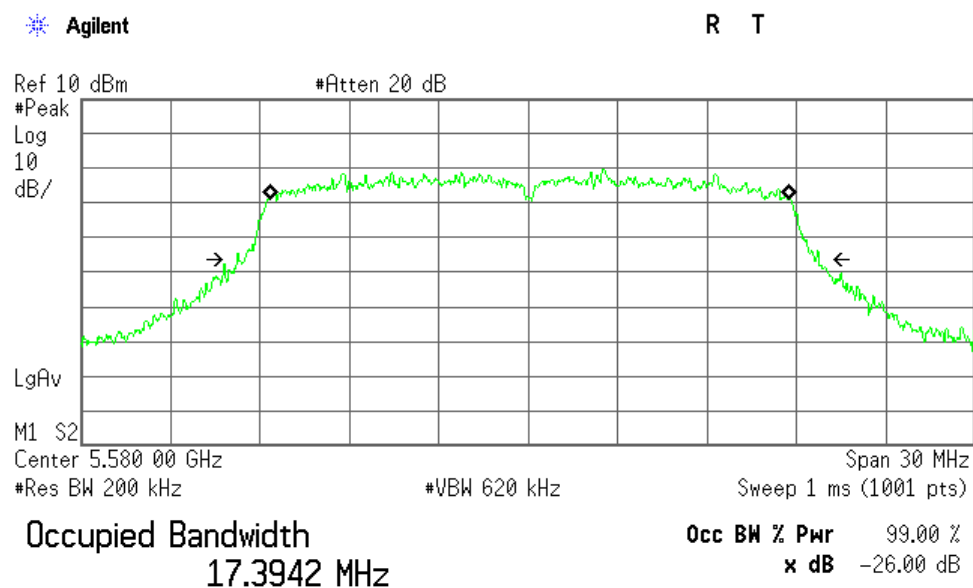

Transmit Freq Error 31.688 kHz
Occupied Bandwidth 19.550 MHz

802.11n (20 MHz) 140ch (5700 MHz)

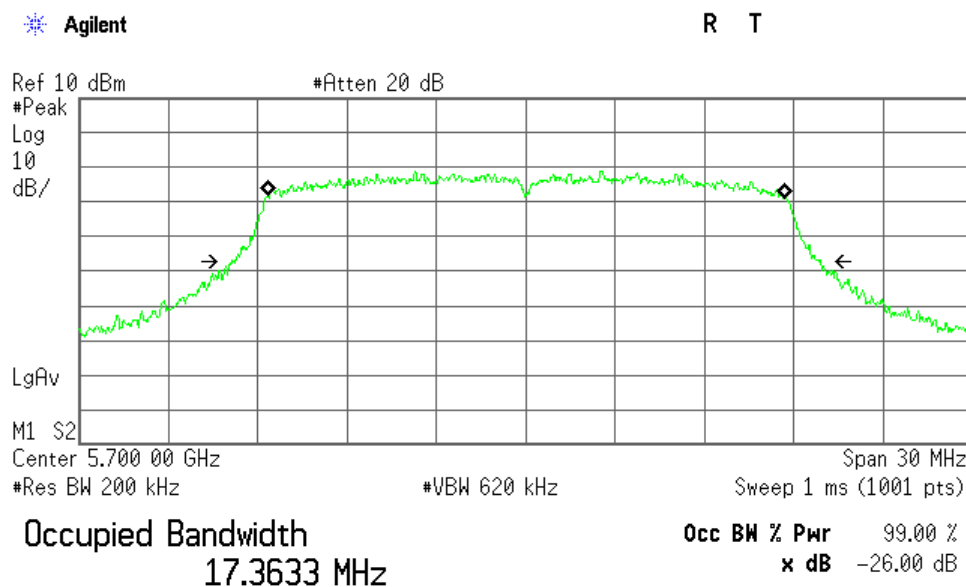

Transmit Freq Error 27.881 kHz
Occupied Bandwidth 19.775 MHz


b) Antenna 2 (ANT1)

Mode of EUT: Tx 802.11n(20 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	19.220	17.407
44	5220	19.480	17.359
48	5240	19.502	17.403
52	5260	19.233	17.379
56	5280	19.451	17.385
64	5320	19.453	17.359
100	5500	19.492	17.362
116	5580	19.372	17.403
140	5700	19.518	17.370

802.11n (20 MHz) 36ch (5180 MHz)

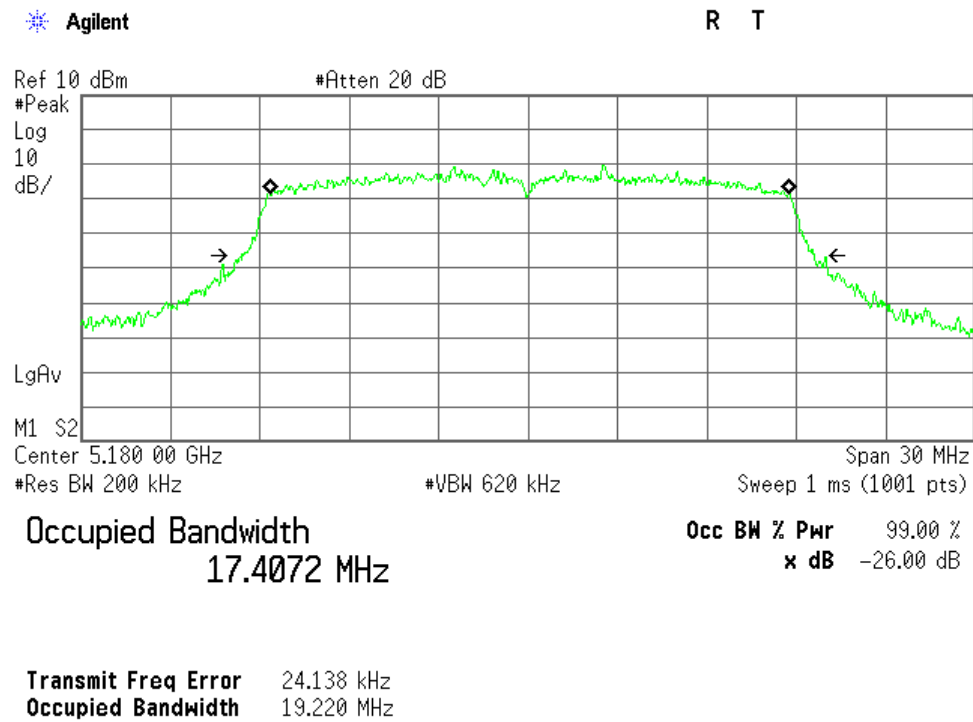


802.11n (20 MHz) 44ch (5220 MHz)

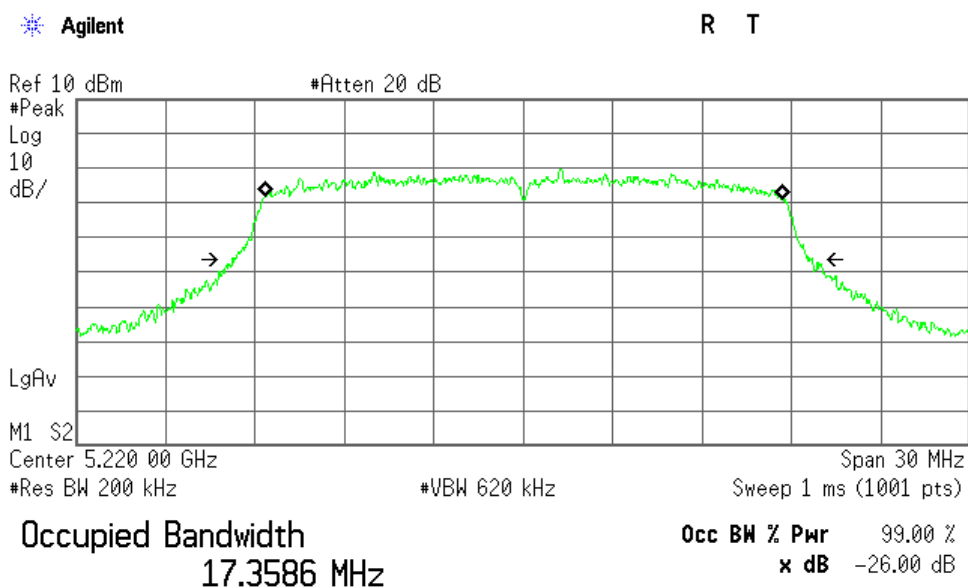


Transmit Freq Error 22.702 kHz
Occupied Bandwidth 19.480 MHz

802.11n (20 MHz) 48ch (5240 MHz)

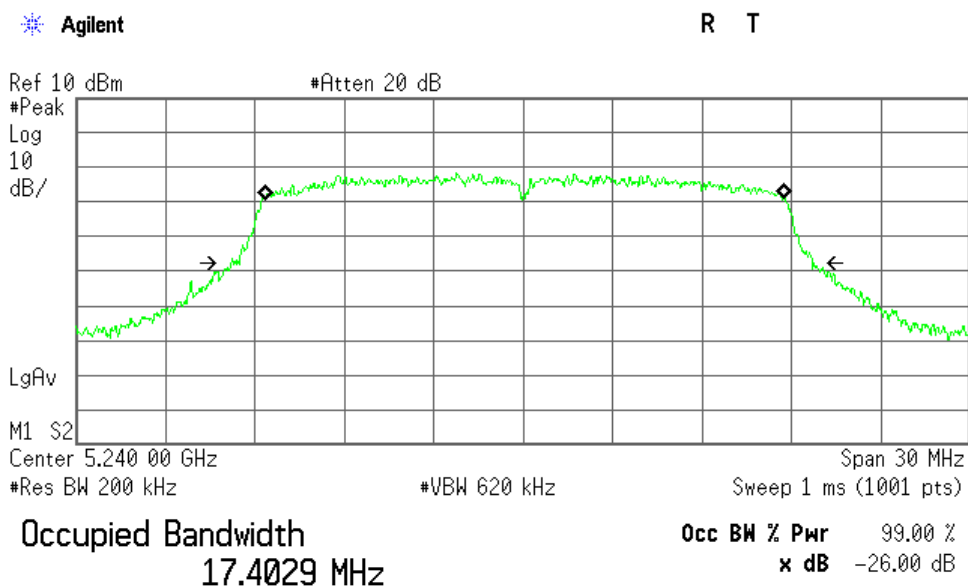


Transmit Freq Error 31.568 kHz
Occupied Bandwidth 19.502 MHz

802.11n (20 MHz) 52ch (5260 MHz)

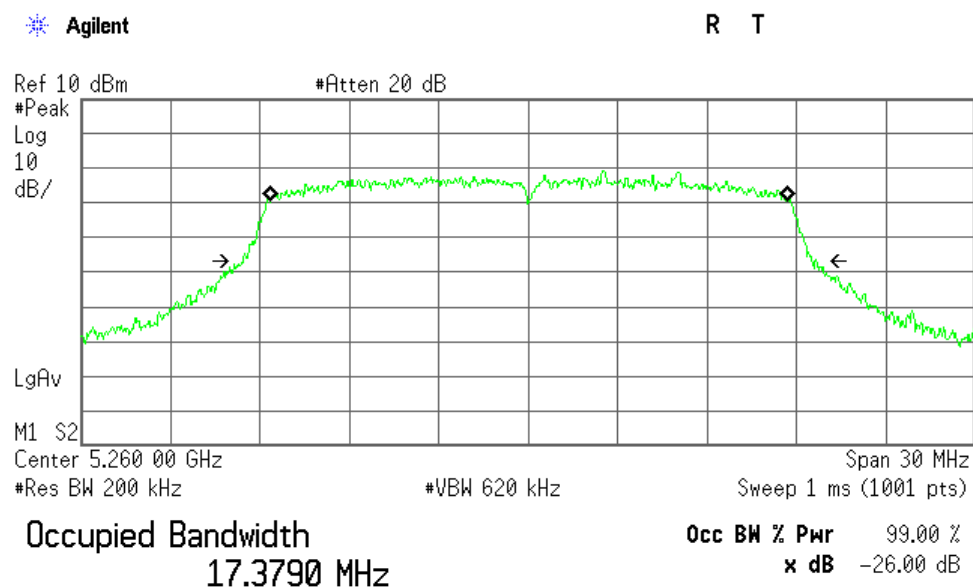


Transmit Freq Error 21.234 kHz
Occupied Bandwidth 19.233 MHz

802.11n (20 MHz) 56ch (5280 MHz)

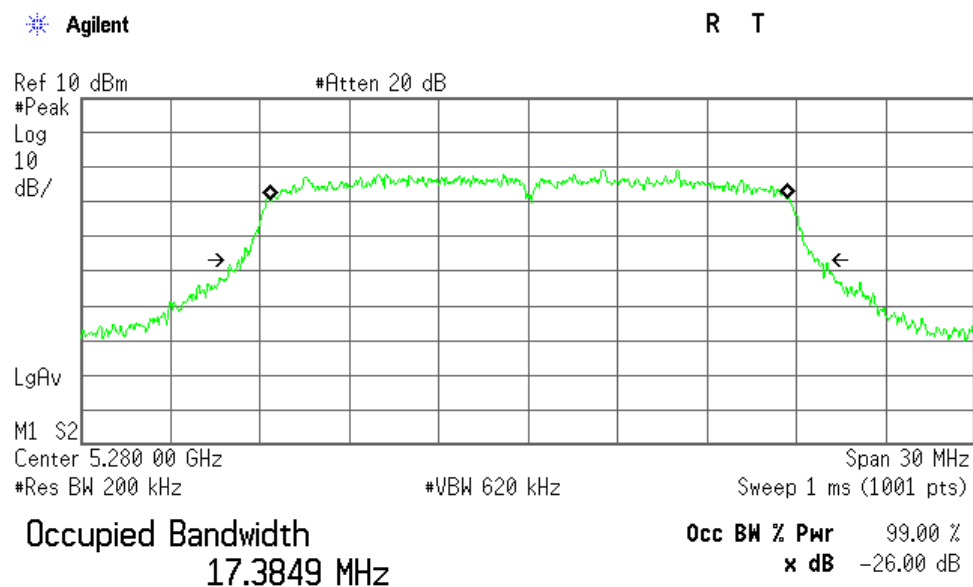


Transmit Freq Error 16.143 kHz
Occupied Bandwidth 19.451 MHz

802.11n (20 MHz) 64ch (5320 MHz)

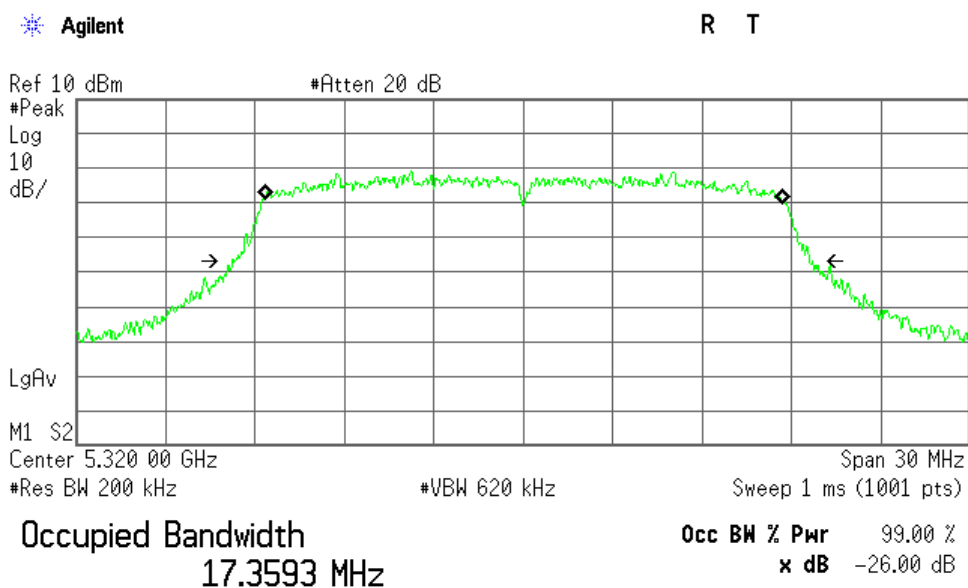


Transmit Freq Error 21.289 kHz
Occupied Bandwidth 19.453 MHz

802.11n (20 MHz) 100ch (5500 MHz)

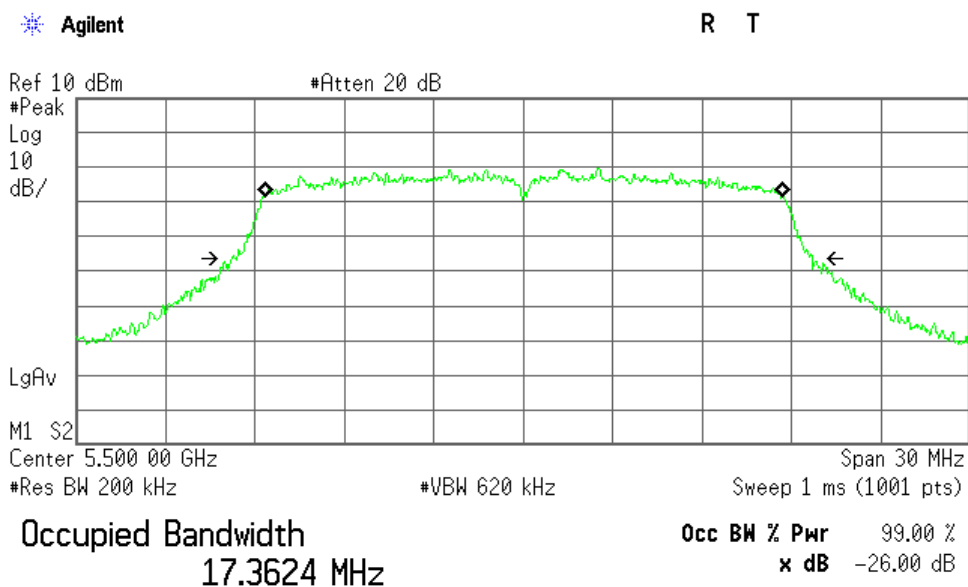


Transmit Freq Error 23.886 kHz
Occupied Bandwidth 19.492 MHz

802.11n (20 MHz) 116ch (5580 MHz)

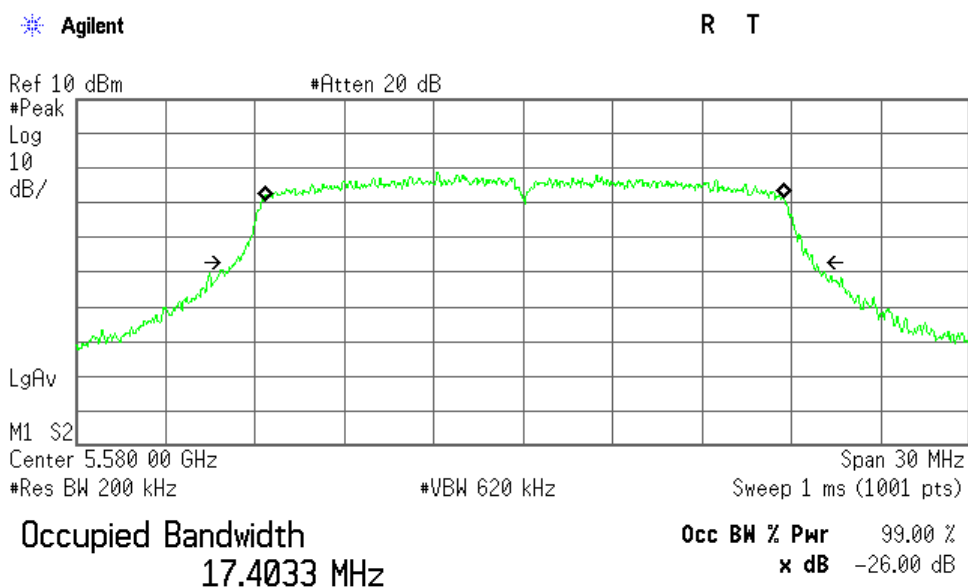

Transmit Freq Error 20.240 kHz
Occupied Bandwidth 19.372 MHz

802.11n (20 MHz) 140ch (5700 MHz)

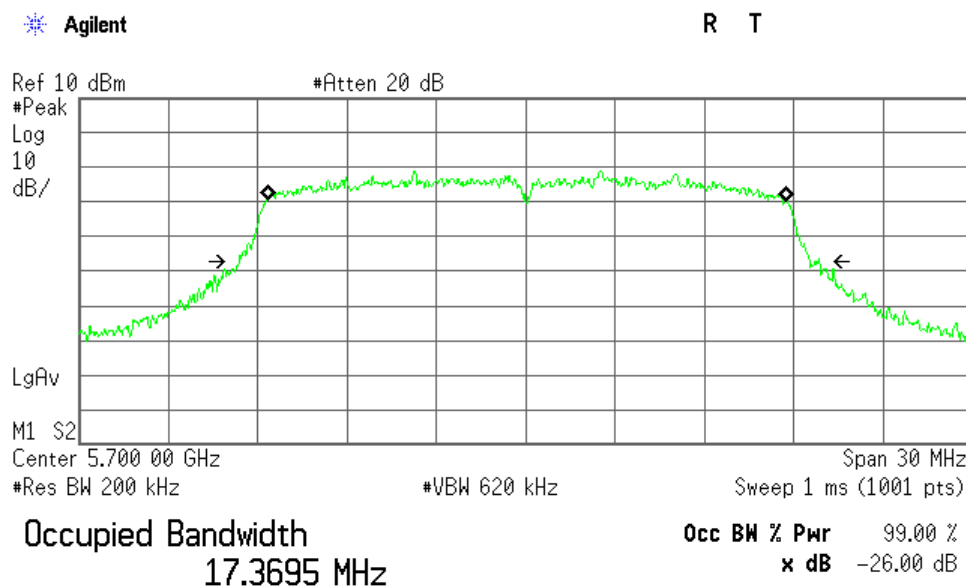

Transmit Freq Error 31.764 kHz
Occupied Bandwidth 19.518 MHz

7.1.4.3 802.11n (40 MHz BW) 26dB/ 99% OBW


a) Antenna 1 (ANT0)

Mode of EUT: Tx 802.11n(40 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
38	5190	39.763	35.811
46	5230	40.278	35.762
54	5270	39.958	35.772
62	5310	39.998	35.734
102	5510	39.982	35.764
134	5670	39.764	35.743

802.11n (40 MHz) 38ch (5190 MHz)

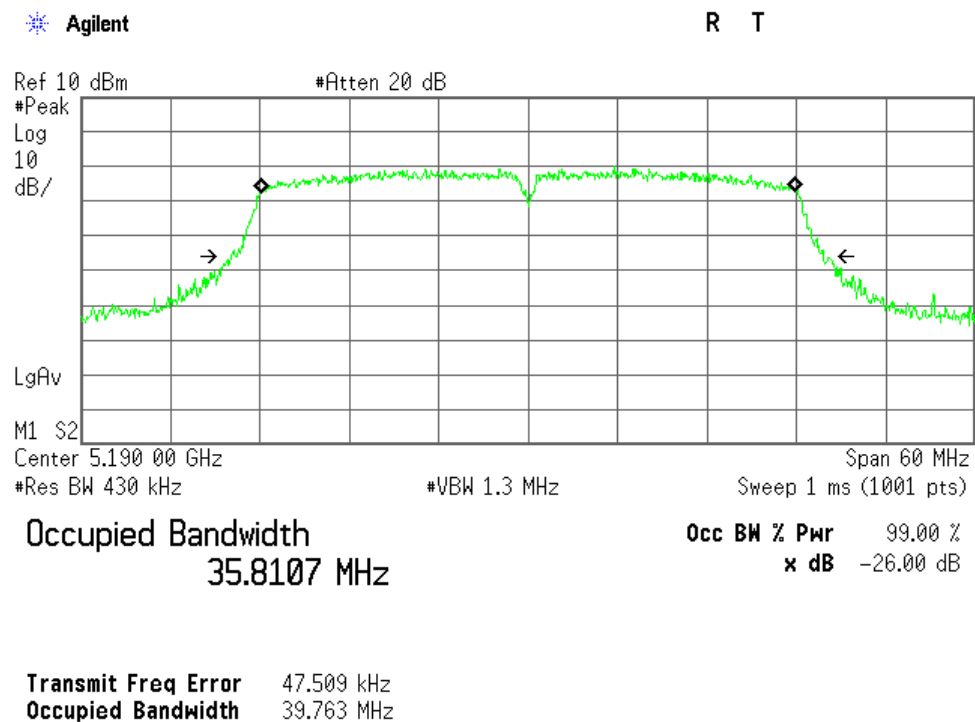


802.11n (40 MHz) 46ch (5230 MHz)

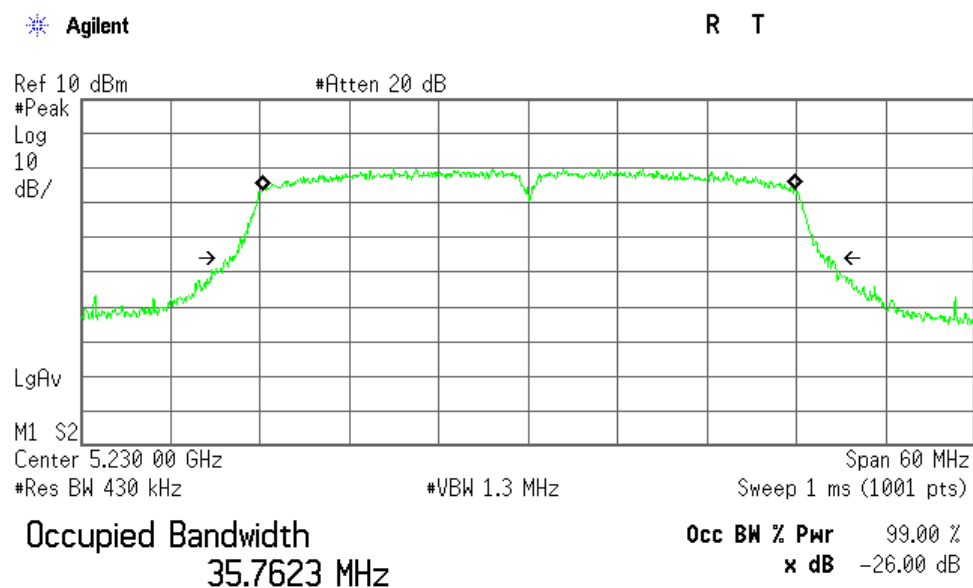


Transmit Freq Error 36.751 kHz
Occupied Bandwidth 40.278 MHz

802.11n (40 MHz) 54ch (5270 MHz)

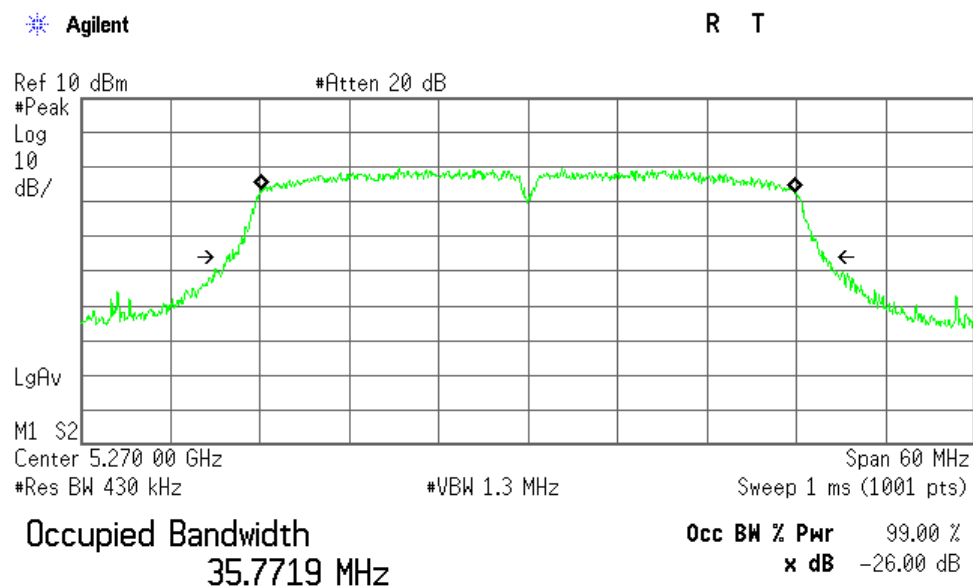


Transmit Freq Error 5.359 kHz
Occupied Bandwidth 39.958 MHz

802.11n (40 MHz) 62ch (5310 MHz)

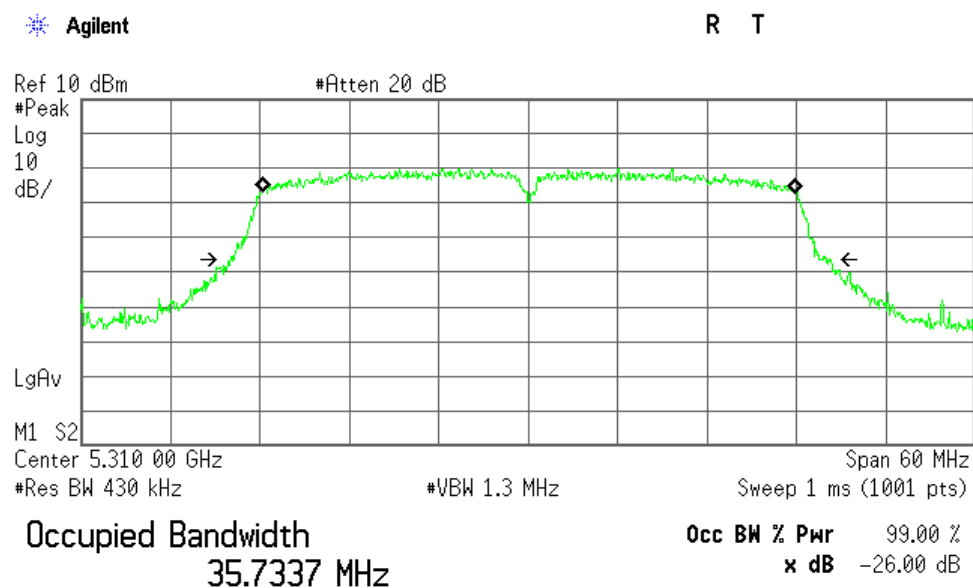


Transmit Freq Error 28.935 kHz
Occupied Bandwidth 39.998 MHz

802.11n (40 MHz) 102ch (5510 MHz)

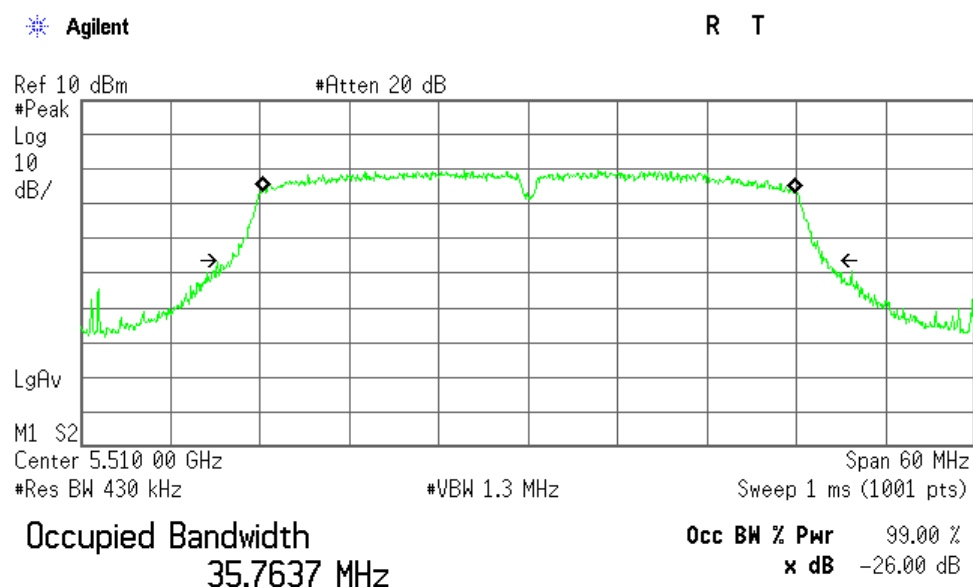

Transmit Freq Error 36.211 kHz
Occupied Bandwidth 39.982 MHz

802.11n (40 MHz) 134ch (5670 MHz)

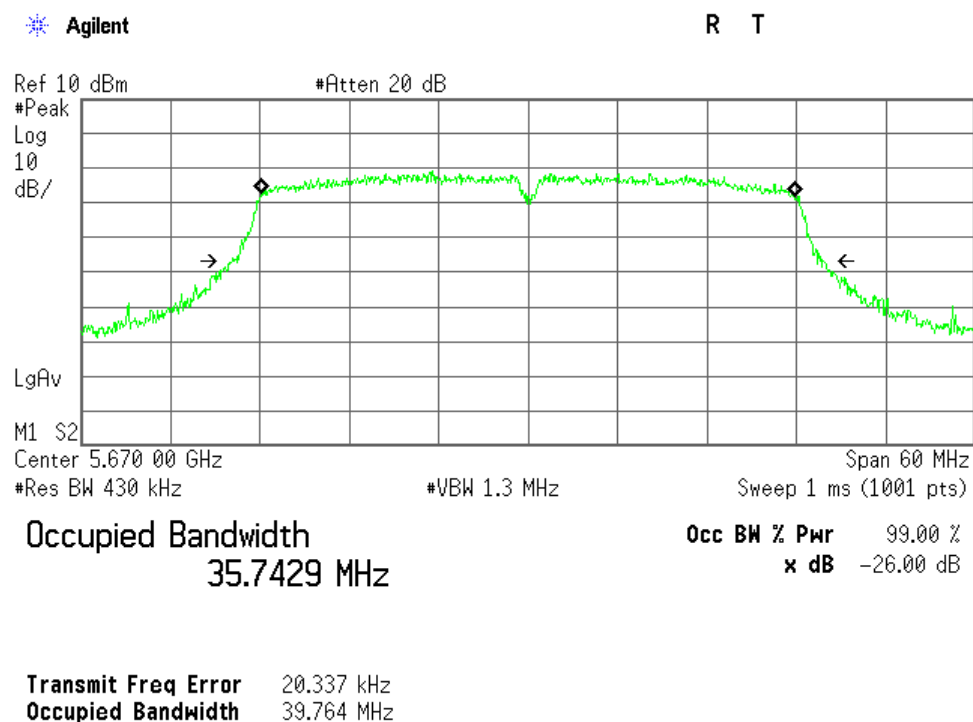


b) Antenna 2 (ANT1)

Mode of EUT: Tx 802.11n(40 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
38	5190	39.455	35.790
46	5230	39.760	35.767
54	5270	39.668	35.766
62	5310	39.736	35.717
102	5510	39.987	35.743
134	5670	39.631	35.719


802.11n (40 MHz) 38ch (5190 MHz)

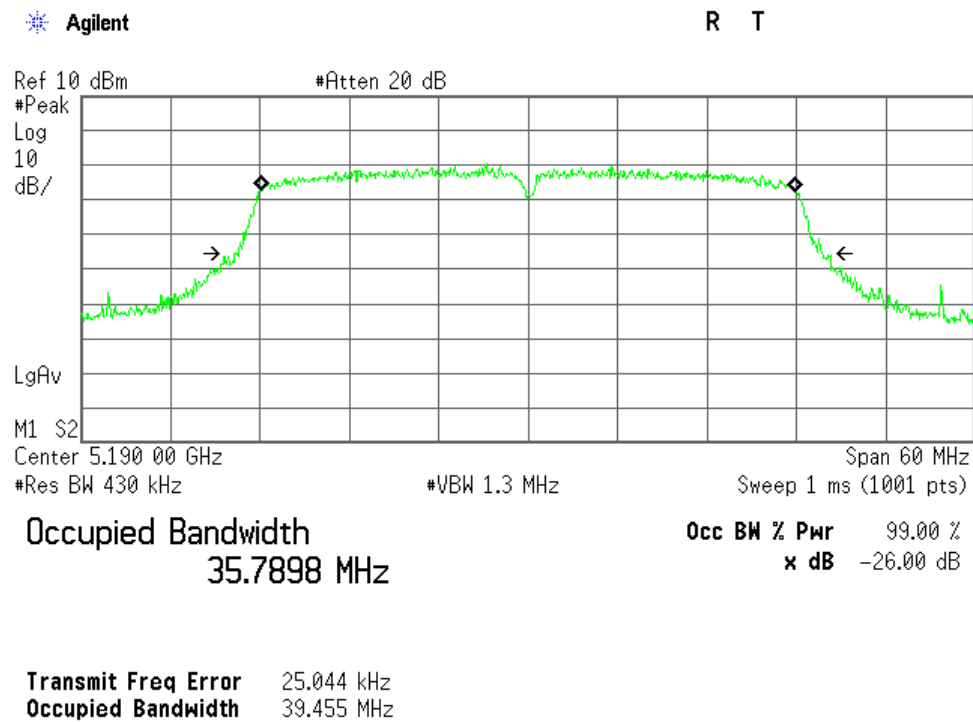


802.11n (40 MHz) 46ch (5230 MHz)

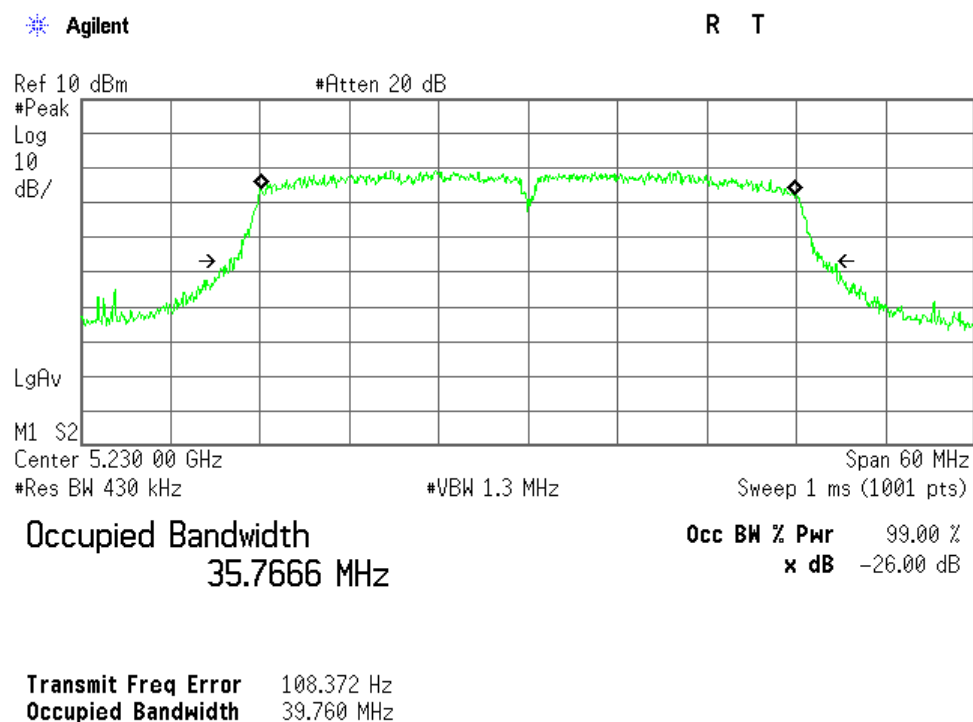


802.11n (40 MHz) 54ch (5270 MHz)

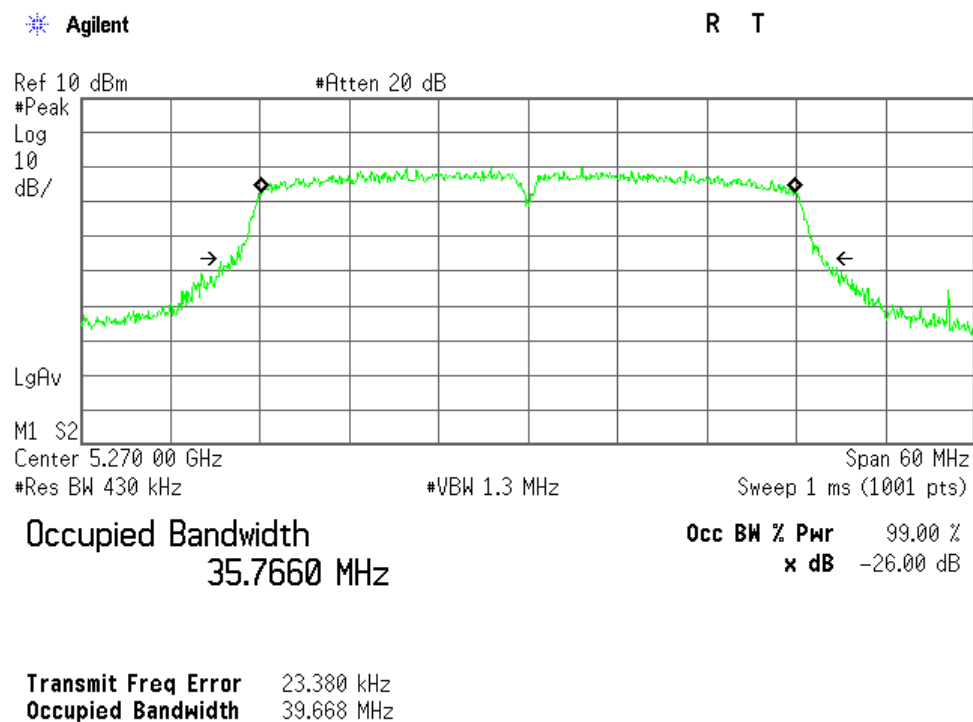


802.11n (40 MHz) 62ch (5310 MHz)

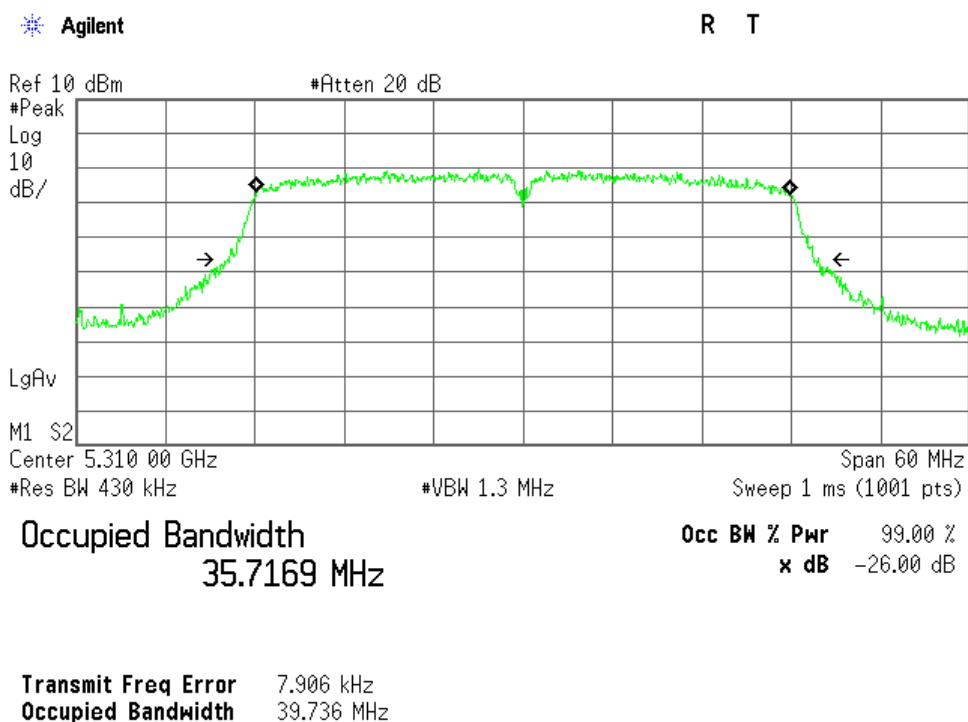

802.11n (40 MHz) 102ch (5510 MHz)

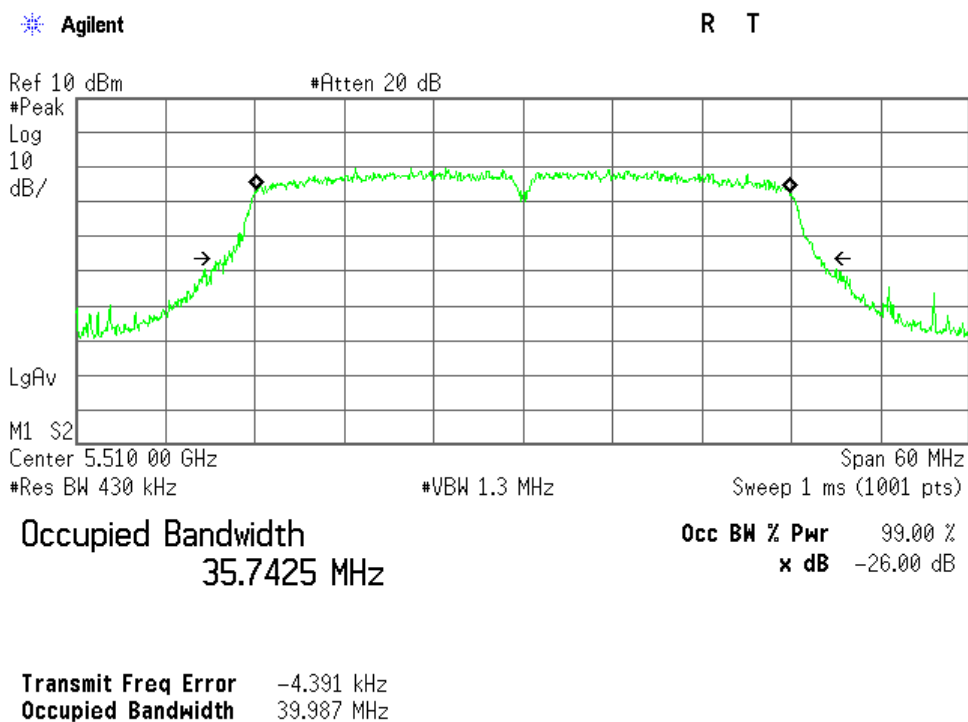

802.11n (40 MHz) 134ch (5670 MHz)

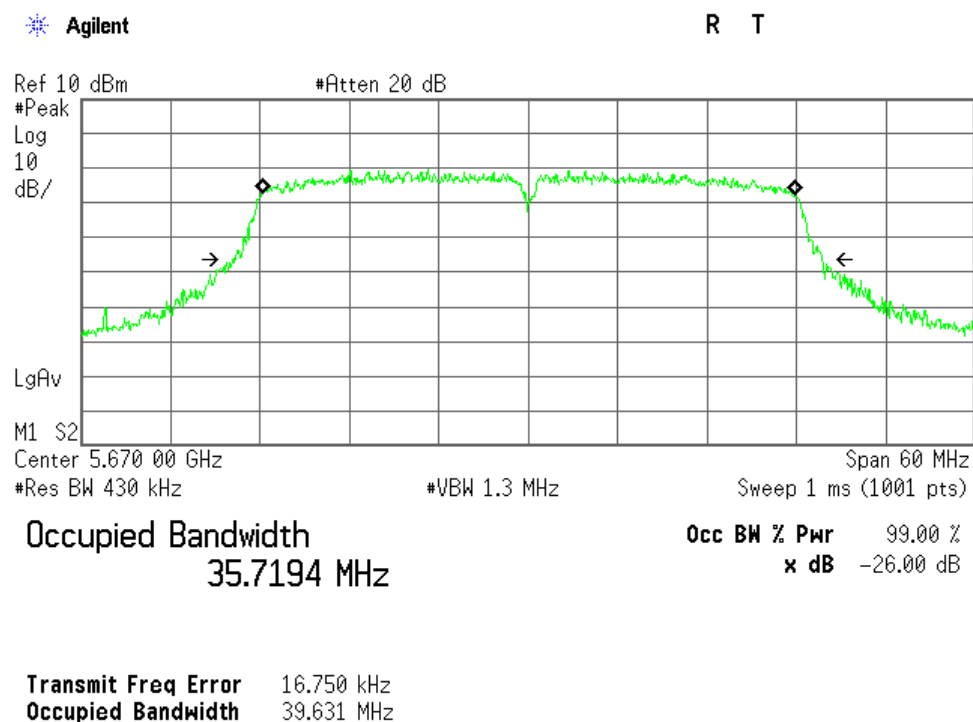

7.1.4.4 802.11ac (80 MHz BW) 26dB/ 99% OBW


a) Antenna 1 (ANT0)

Mode of EUT: Tx 802.11ac(80 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
42	5210	81.798	74.811
58	5290	81.944	74.789
106	5530	81.847	74.840
122	5610	82.481	74.875

802.11ac (80 MHz) 42ch (5210 MHz)

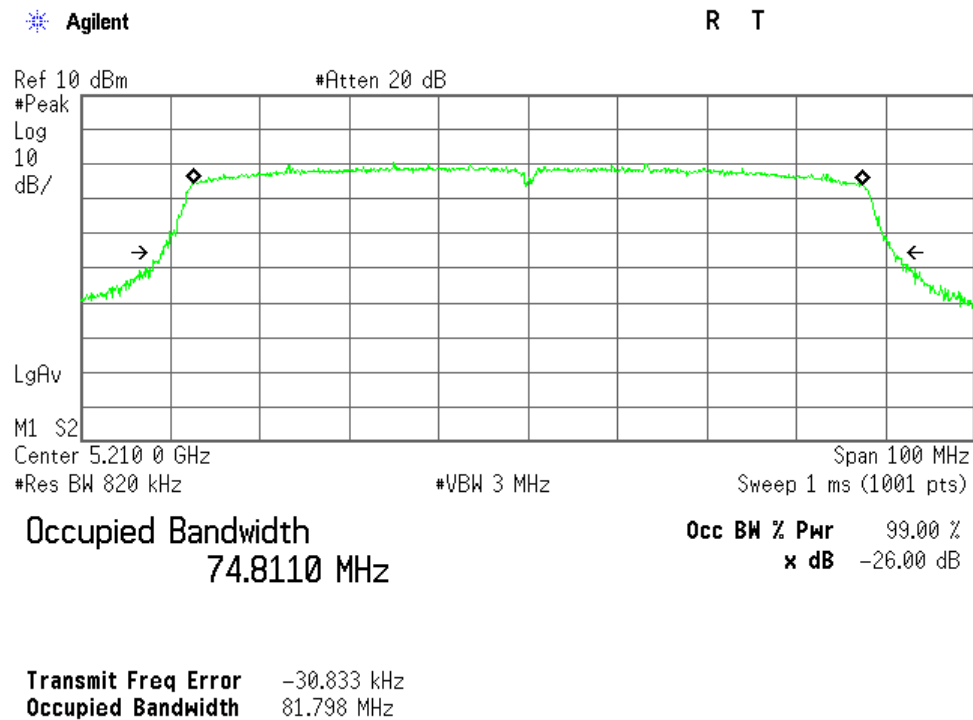


802.11ac (80 MHz) 58ch (5290 MHz)

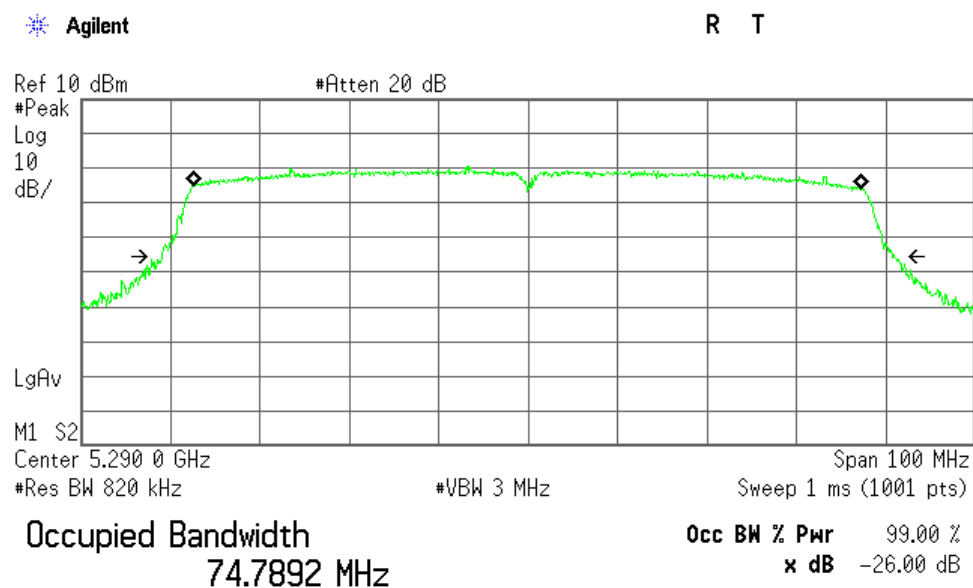


Transmit Freq Error -55.085 kHz
Occupied Bandwidth 81.944 MHz

802.11ac (80 MHz) 106ch (5530 MHz)

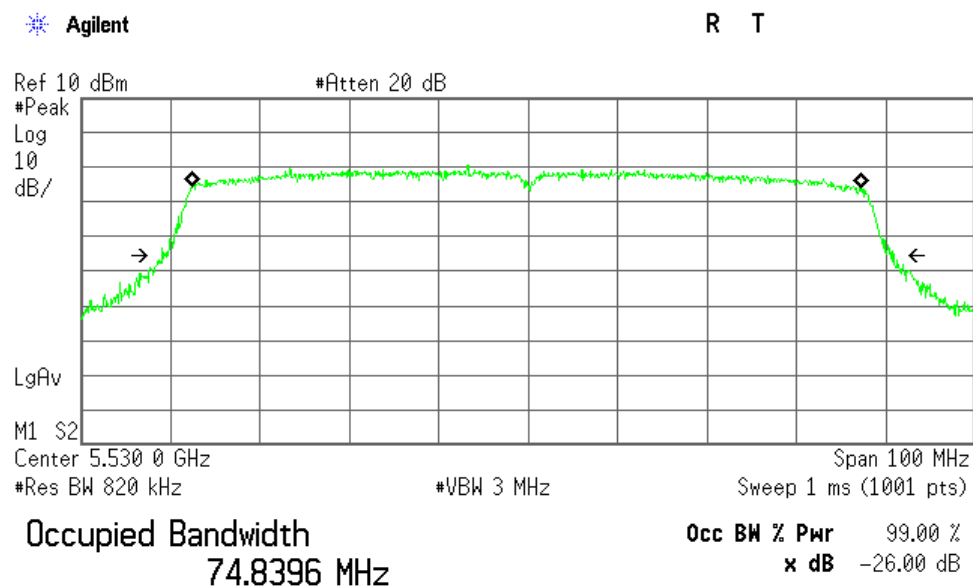

Transmit Freq Error -71.817 kHz
Occupied Bandwidth 81.847 MHz

802.11ac (80 MHz) 122ch (5610 MHz)

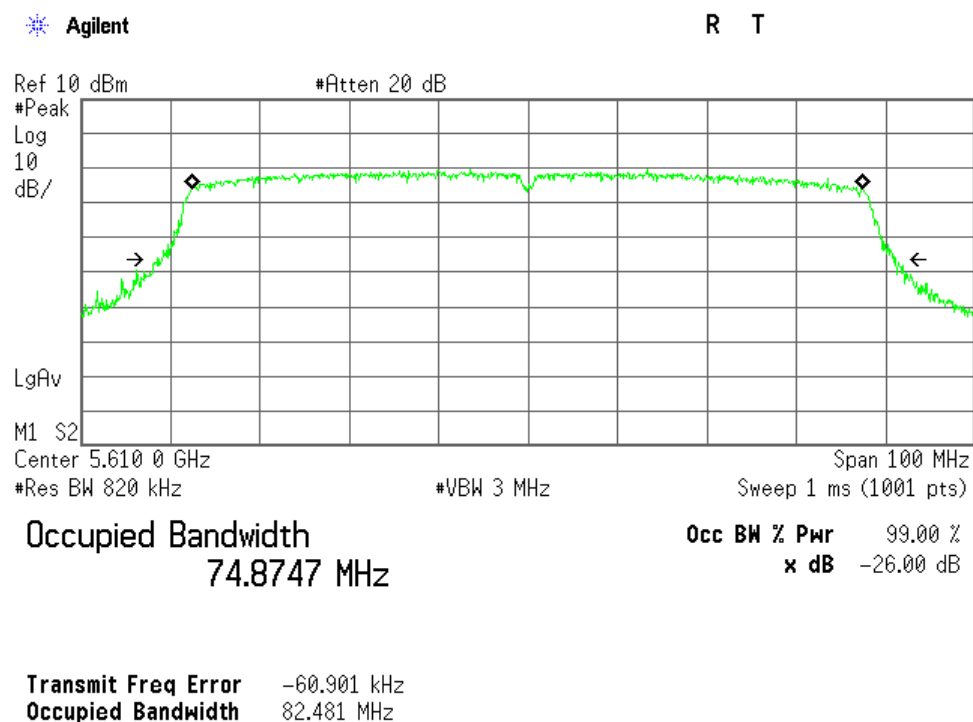


b) Antenna 2 (ANT0)

Mode of EUT: Tx 802.11ac(80 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
42	5210	81.473	74.775
58	5290	82.031	74.776
106	5530	81.763	74.834
122	5610	81.964	74.849


802.11ac (80 MHz) 42ch (5210 MHz)

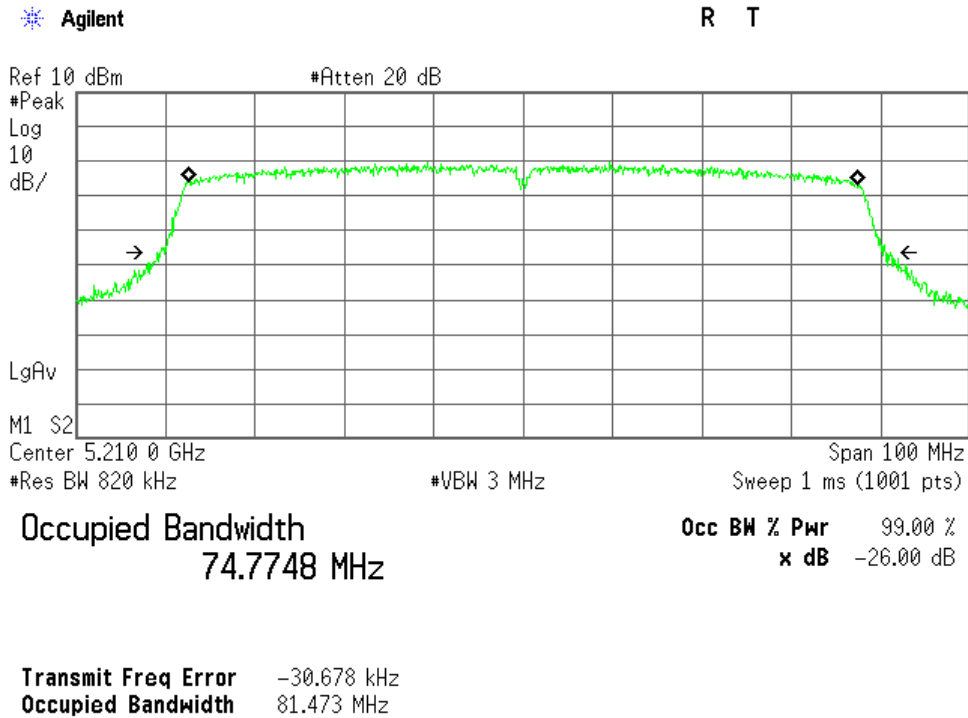


802.11ac (80 MHz) 58ch (5290 MHz)

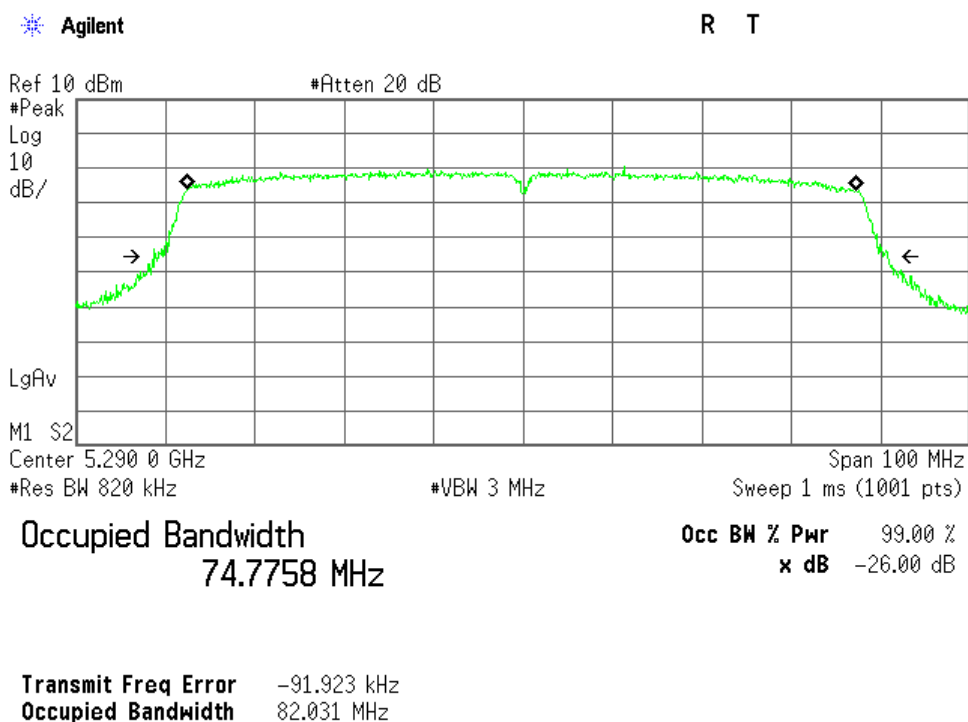

802.11ac (80 MHz) 106ch (5530 MHz)

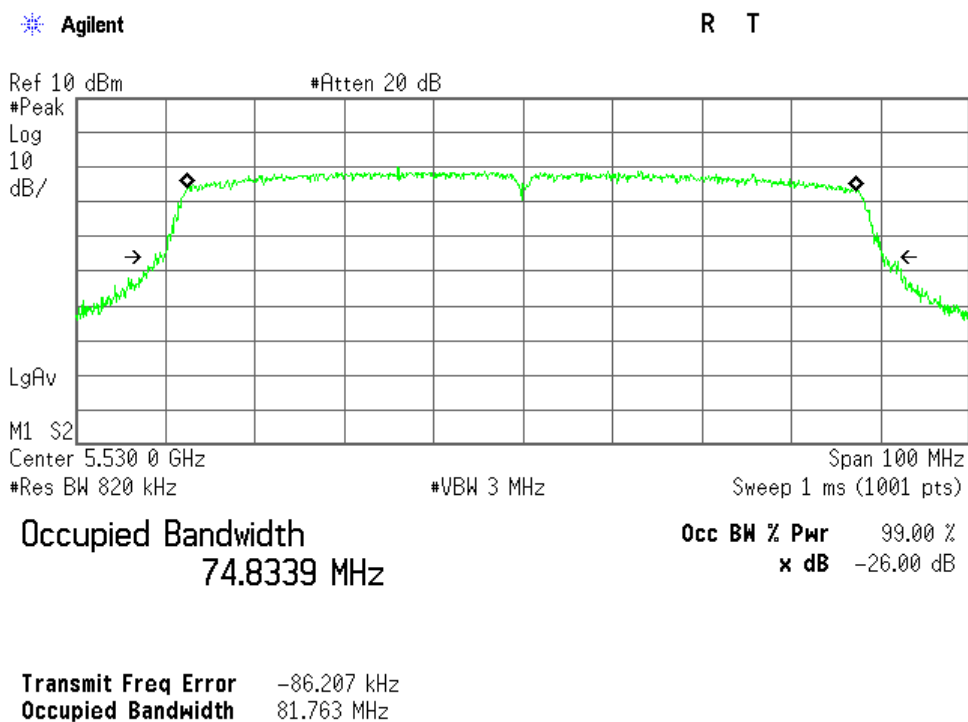

802.11ac (80 MHz) 122ch (5610 MHz)

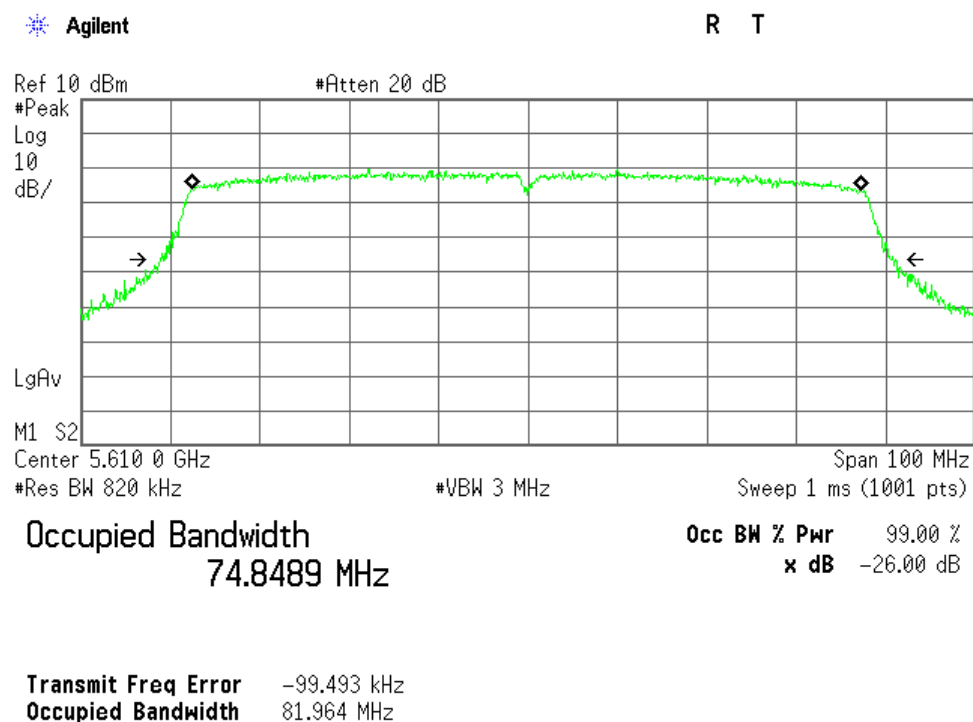

7.2 Maximum Conducted Output Power

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.2.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 10.95 dB at 5700.0 MHz

Remarks : Worst case is 802.11a channel 140.

Max Output Power 12.83 dBm at 5180.0 MHz

Remarks : Worst case is 802.11a channel 36.

Uncertainty of Measurement Results +/- 0.9 dB

7.2.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year
Power Meter	ML2495A	Anritsu	B-16	2014/7	1 Year
Pulse Power Sensor	MA2411B	Anritsu	B-18	2014/7	1 Year

7.2.3 Test Method and Test Setup (Diagrammatic illustration)


The maximum conducted output power measurements were carried out connecting to the power meter and the pulse power sensor or spectrum analyzer listed above.

Measurement Method:

- 1) WLAN 20 MHz/40 MHz BW mode
KDB 789033 D02 E.3.a) Method PM (Measurement using an RF average power meter)
- 2) WLAN 80 MHz BW mode
KDB 789033 D02 E.2.d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction)

The EUT transmits non-continuously therefore the duty cycle measurements were performed. The measurements of duty cycle and transmission duration were performed connecting to the spectrum analyzer in accordance with KDB 789033 D02 Method B.2. as follows;
Span: Zero/ RBW: 8 MHz/ VBW $\geq$ 8 MHz/ Sweep: Auto/ Detector: Peak

(referred documentation is No. G70364M)

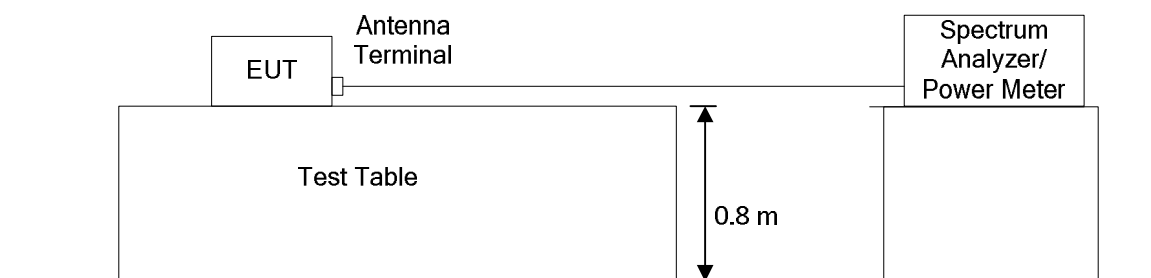

7.2.4 Test Data

7.2.4.1 802.11a Maximum conducted output power

Test Date : March 9, 2015

Temp.: 21°C, Humi: 47%

Mode of EUT: Tx Mode (802.11a)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total				
36	5180	10.89	-0.83	-1.33	1.94	12.83	18.903	24.00	11.17
44	5220	10.89	-0.99	-1.51	1.77	12.66	18.822	24.00	11.34
48	5240	10.89	-1.03	-1.54	1.73	12.62	18.811	24.00	11.38
52	5260	10.88	-1.05	-1.60	1.69	12.57	18.802	23.74	11.17
56	5280	10.88	-0.89	-1.52	1.82	12.70	18.679	23.71	11.02
64	5320	10.90	-0.99	-1.62	1.72	12.62	18.793	23.74	11.12
100	5500	10.90	-1.11	-1.58	1.67	12.57	18.445	23.66	11.09
116	5580	10.90	-0.99	-1.65	1.70	12.60	18.713	23.72	11.12
140	5700	10.91	-0.95	-1.42	1.83	12.74	18.560	23.69	10.95

The test results (Power) is calculated as follows;

For 36 channel (5180 MHz)


Power = Correction Factor + Meter Reading = 10.89 + (1.94) = 12.83 dBm

Correction Factor = cable loss + 10 dB attenuator + Duty Factor

Duty Factor at 802.11a/ TX rate 6 Mbps is 0.21 dB

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 24 dBm(250 mW).

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

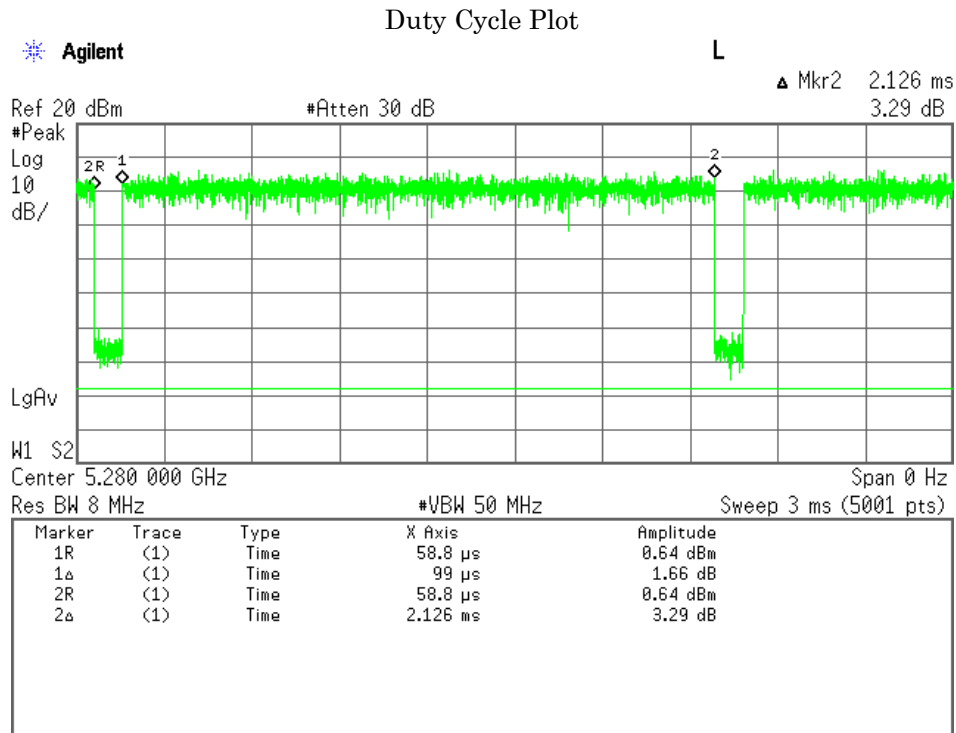

Duty Factor = 10 log ((Duty Cycle)/(Burst On-period))= 10 log (2126/(2126-99.0)) = 0.21 dB

7.2.4.2 802.11n (20 MHz BW) Maximum conducted output power

Mode of EUT: Tx Mode (802.11n: 20 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total				
36	5180	10.89	-1.17	-1.64	1.61	12.50	19.687	24.00	11.50
44	5220	10.89	-1.28	-1.78	1.49	12.38	19.848	24.00	11.62
48	5240	10.89	-1.30	-1.82	1.46	12.35	19.330	24.00	11.65
52	5260	10.88	-1.36	-1.87	1.40	12.28	19.695	23.94	11.66
56	5280	10.88	-1.18	-1.78	1.54	12.42	19.389	23.88	11.45
64	5320	10.90	-1.27	-1.87	1.45	12.35	19.398	23.88	11.53
100	5500	10.90	-1.38	-1.81	1.42	12.32	20.183	24.00	11.68
116	5580	10.90	-1.27	-1.89	1.44	12.34	19.550	23.91	11.57
140	5700	10.91	-1.23	-1.66	1.57	12.48	19.775	23.96	11.48

The test results (Power) is calculated as follows;

For 36 channel (5180 MHz)

Power = Correction Factor + Meter Reading = 10.89 + (1.61) = 12.50 dBm


Correction Factor = cable loss + 10 dB attenuator + Duty Factor

Duty Factor at 802.11n(20 MHz BW) / TX rate 6.5 Mbps is 0.22 dB

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 24 dBm(250 mW).

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

Duty Cycle Plot

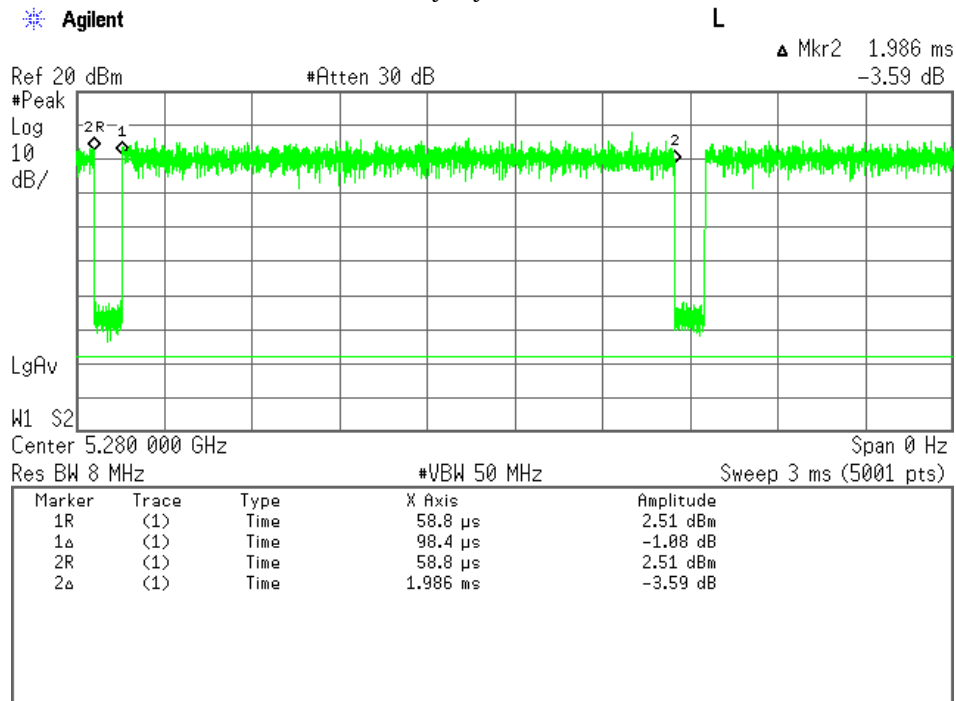

Duty Factor = 10 log ((Duty Cycle)/(Burst On-period))= 10 log (1986/(1986-98.4)) = 0.22 dB

7.2.4.3 802.11n (40 MHz BW) Maximum conducted output power

Mode of EUT: Tx Mode (802.11n: 40 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total				
38	5190	10.96	-0.91	-1.45	1.84	12.80	39.763	24.00	11.20
46	5230	10.96	-1.00	-1.56	1.74	12.70	40.278	24.00	11.30
54	5270	10.95	-1.09	-1.60	1.67	12.62	39.958	24.00	11.38
62	5310	10.97	-1.05	-1.54	1.72	12.69	39.998	24.00	11.31
102	5510	10.97	-1.12	-1.55	1.68	12.65	39.982	24.00	11.35
134	5670	10.98	-0.89	-1.36	1.89	12.87	39.764	24.00	11.13

The test results (Power) is calculated as follows:

For 38 channel (5190 MHz)

Power = Correction Factor + Meter Reading = 10.96 + (1.84) = 12.80 dBm


Correction Factor = cable loss + 10 dB attenuator + Duty Factor

Duty Factor at 802.11n(40 MHz BW) / TX rate 13.5 Mbps is 0.44 dB

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 24 dBm(250 mW).

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

Duty Cycle Plot

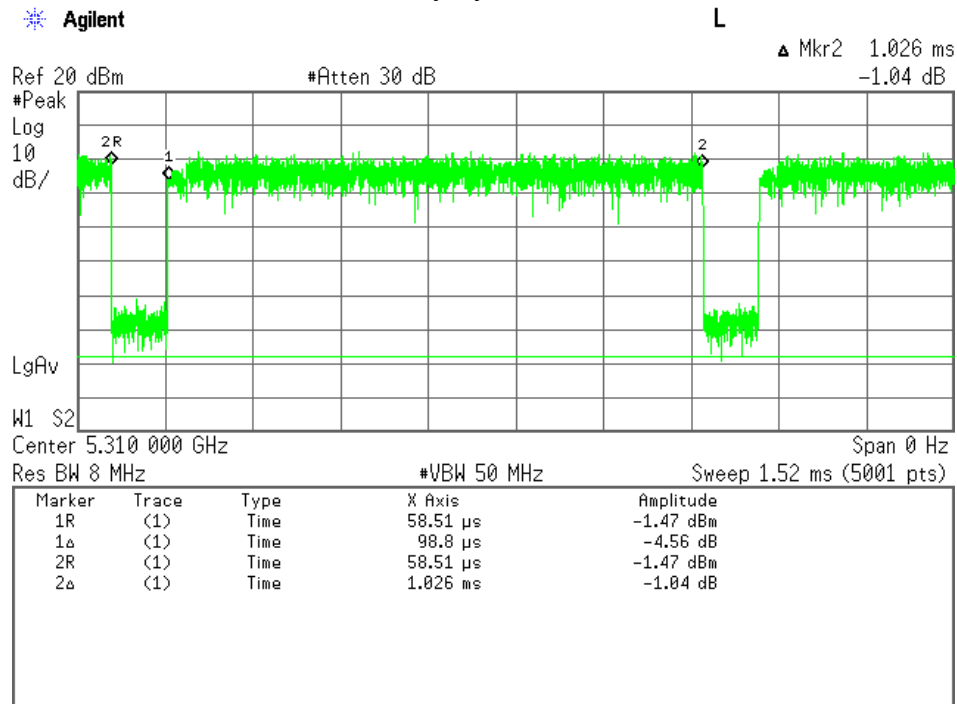

Duty Factor = 10 log ((Duty Cycle)/(Burst On-period))= 10 log (1026/(1026-98.8)) = 0.44 dB

7.2.4.4 802.11ac (80 MHz BW) Maximum conducted output power

Mode of EUT: Tx Mode (802.11ac: 80 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total				
42	5210	11.17	-1.57	-2.01	1.23	12.40	81.798	24.00	11.60
58	5290	11.16	-1.57	-2.15	1.16	12.32	81.944	24.00	11.68
106	5530	11.18	-1.75	-2.25	1.02	12.20	81.847	24.00	11.80
122	5610	11.17	-1.56	-2.12	1.18	12.35	82.481	24.00	11.65

The test results (Power) is calculated as follows;

For 38 channel (5210 MHz)


Power = Correction Factor + Meter Reading = 11.17 + (1.23) = 12.40 dBm

Correction Factor = cable loss + 10 dB attenuator + Duty Factor

Duty Factor at 802.11ac(80 MHz BW) / TX rate 29.3 Mbps is 0.84 dB

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 24 dBm(250 mW).



Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.


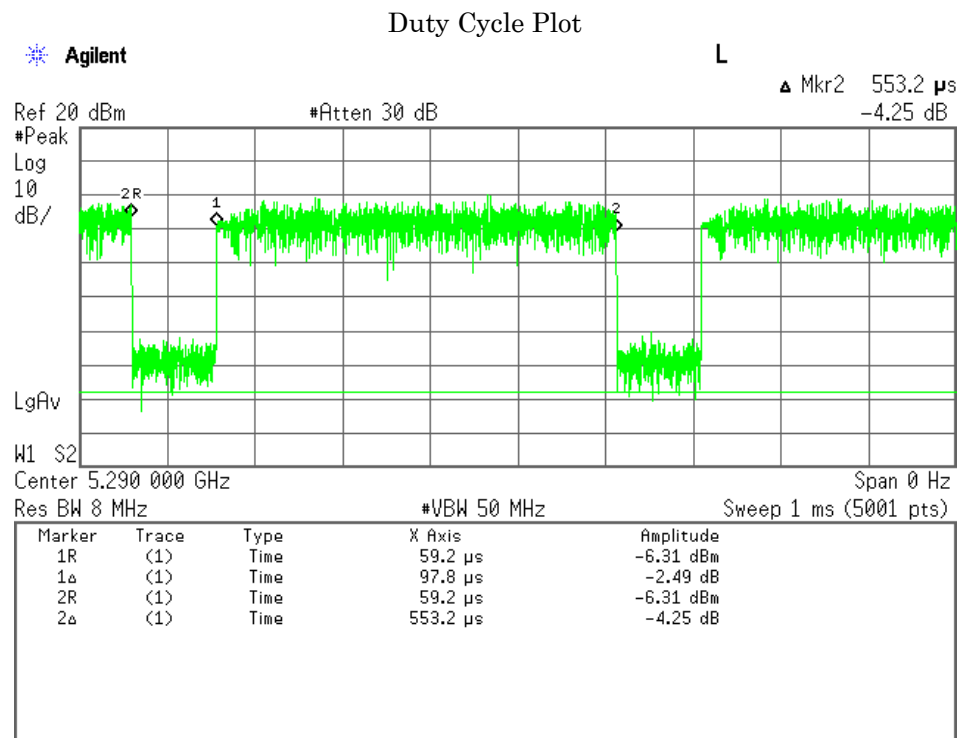


Duty Factor = 10 log ((Duty Cycle)/(Burst On-period))= 10 log (553.2/(553.2-97.8)) = 0.84 dB

a) Antenna 1 (ANT0)



Output Power Test Plot

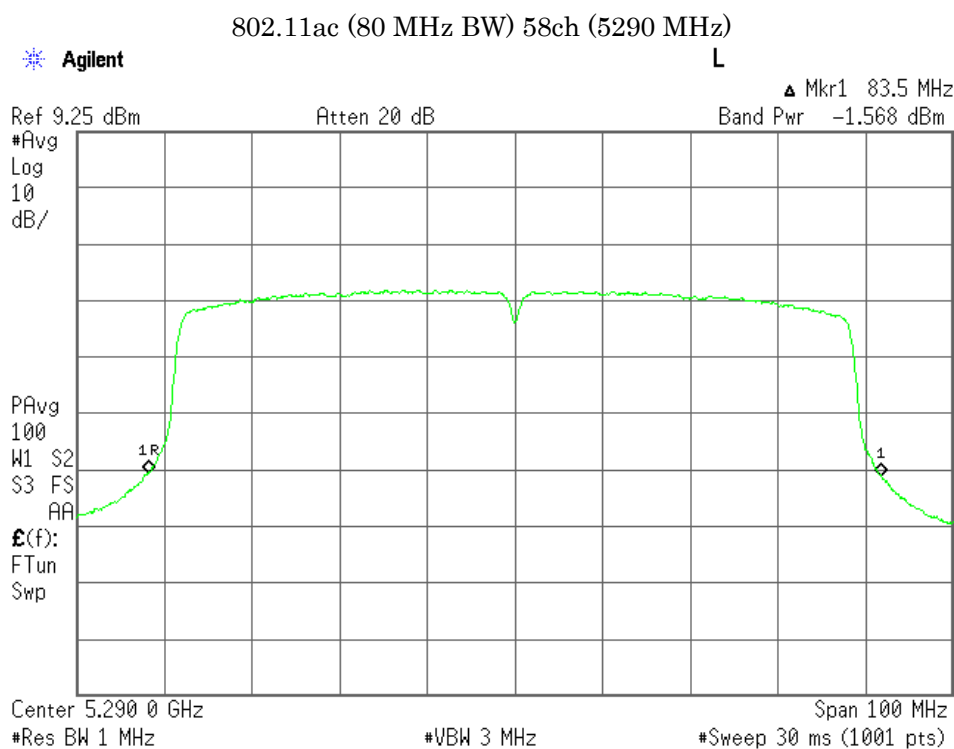
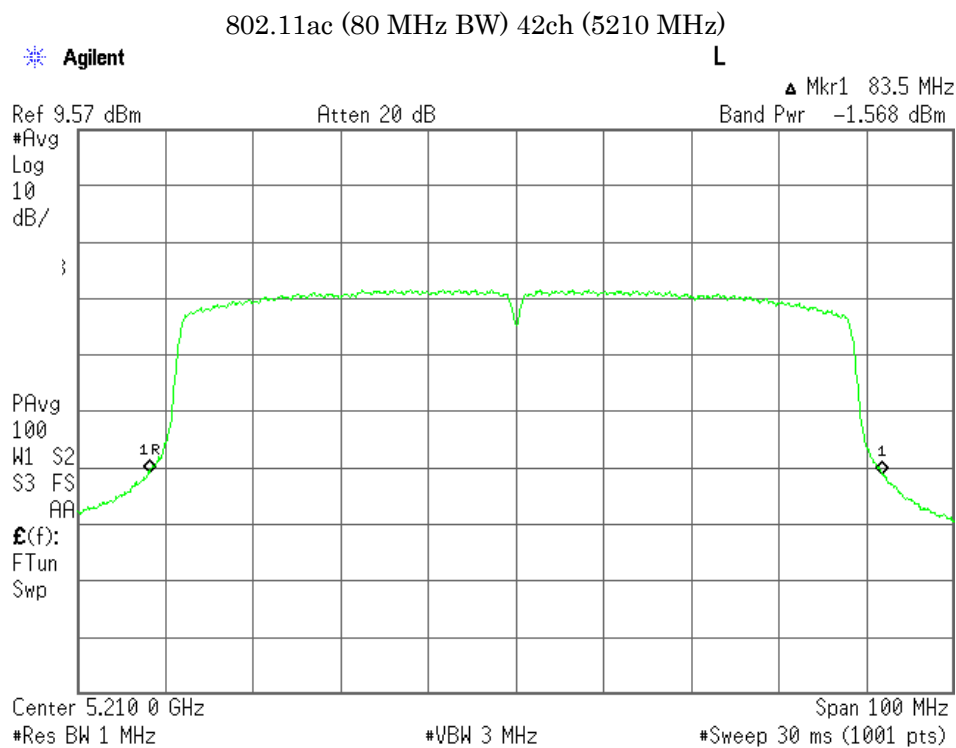


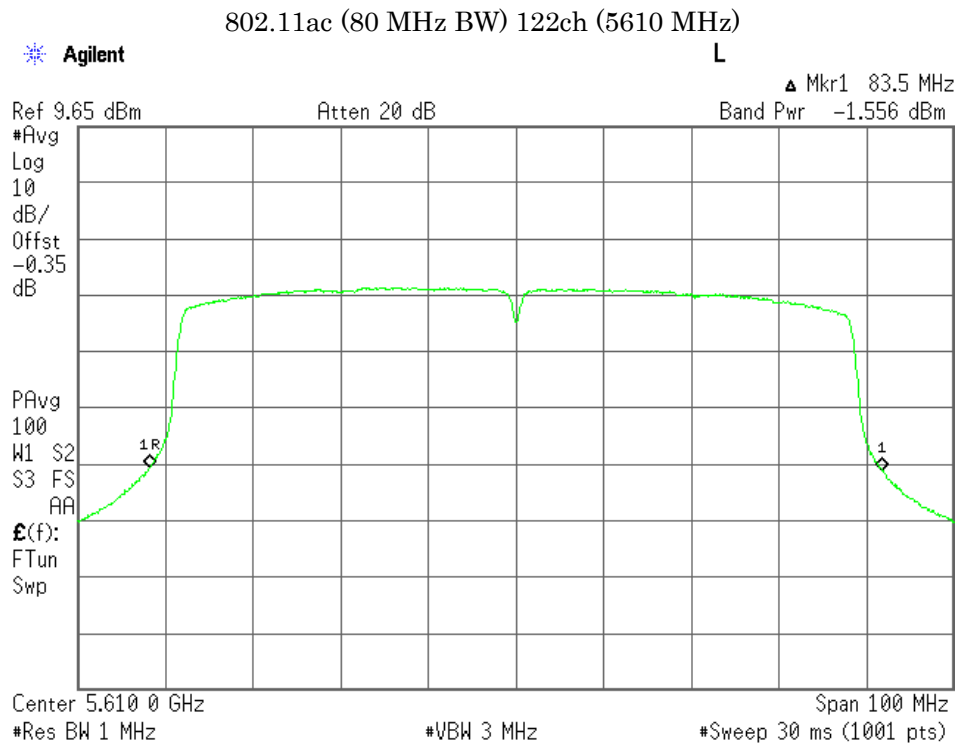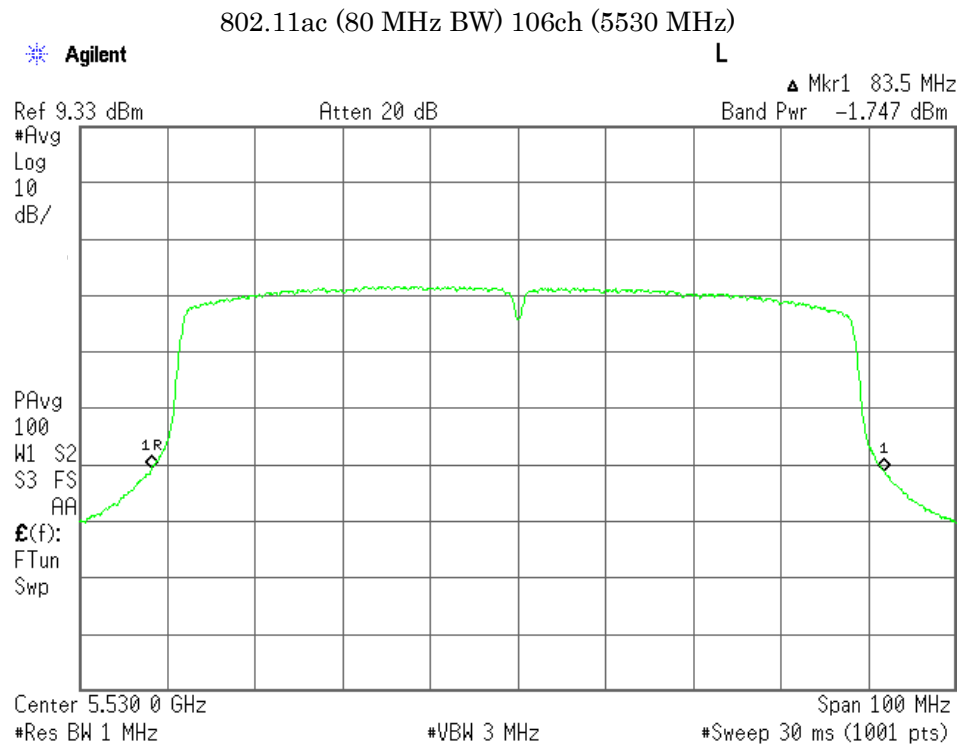

b) Antenna 2 (ANT1)

Output Power Test Plot

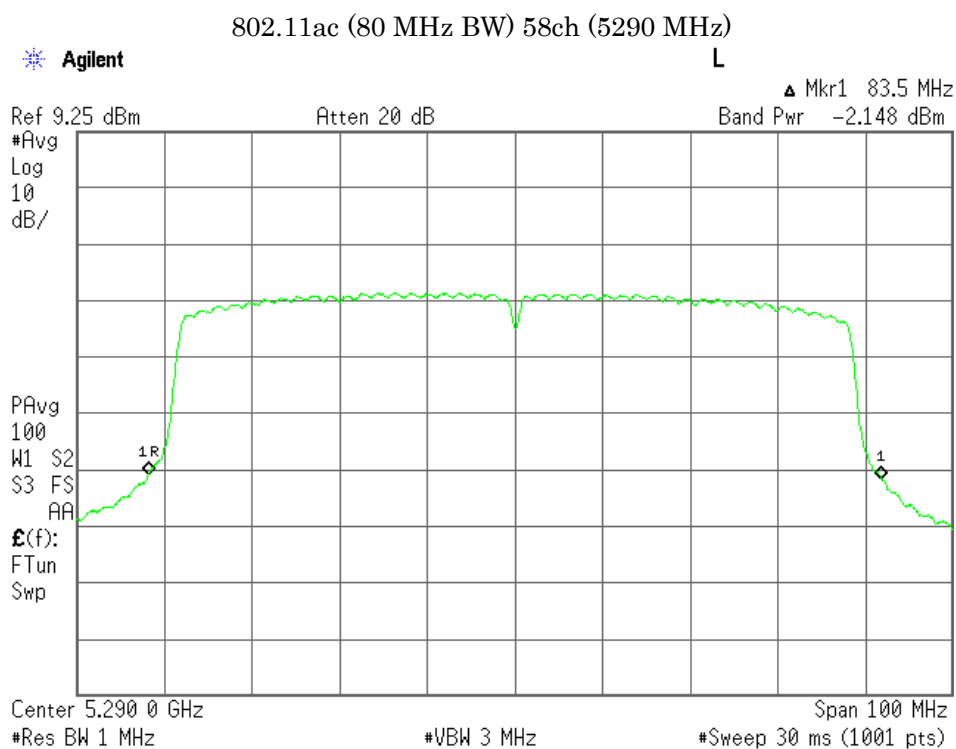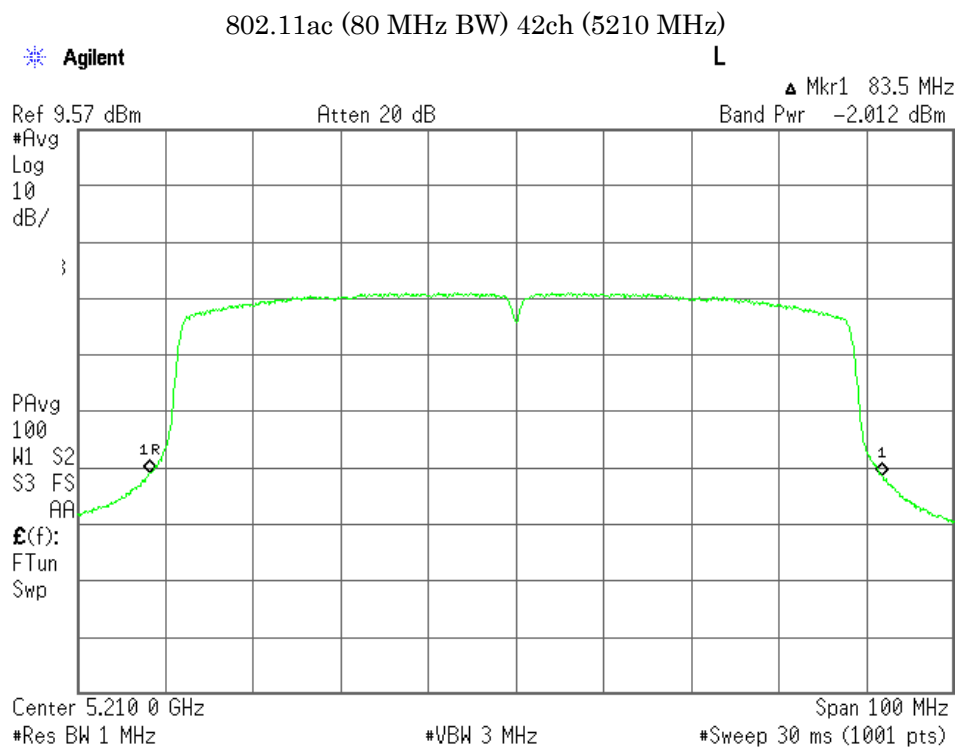

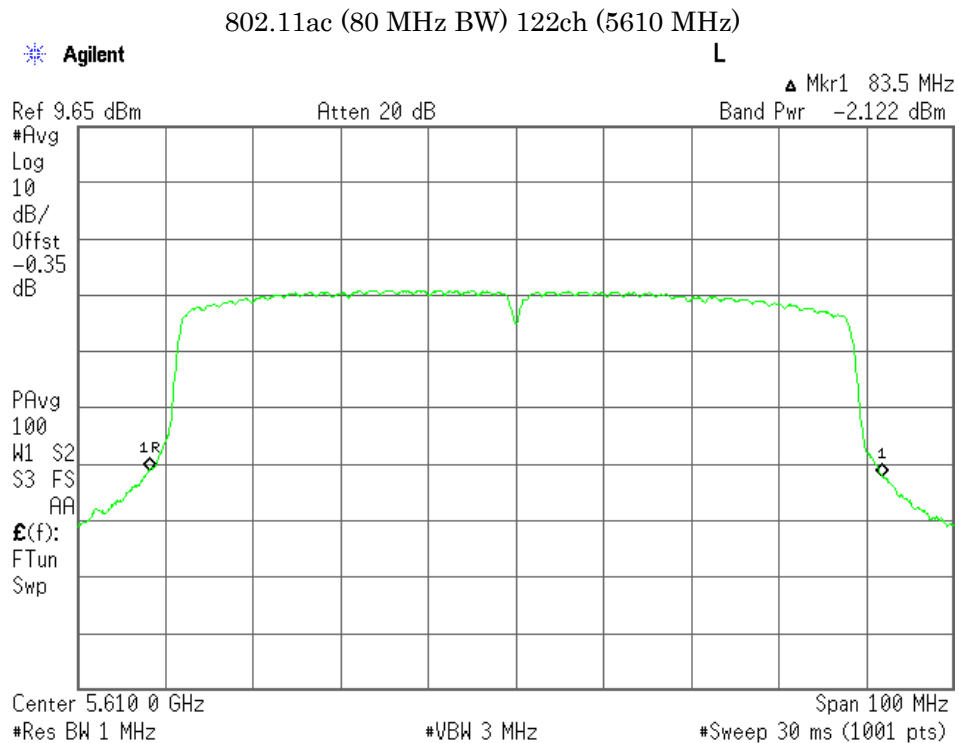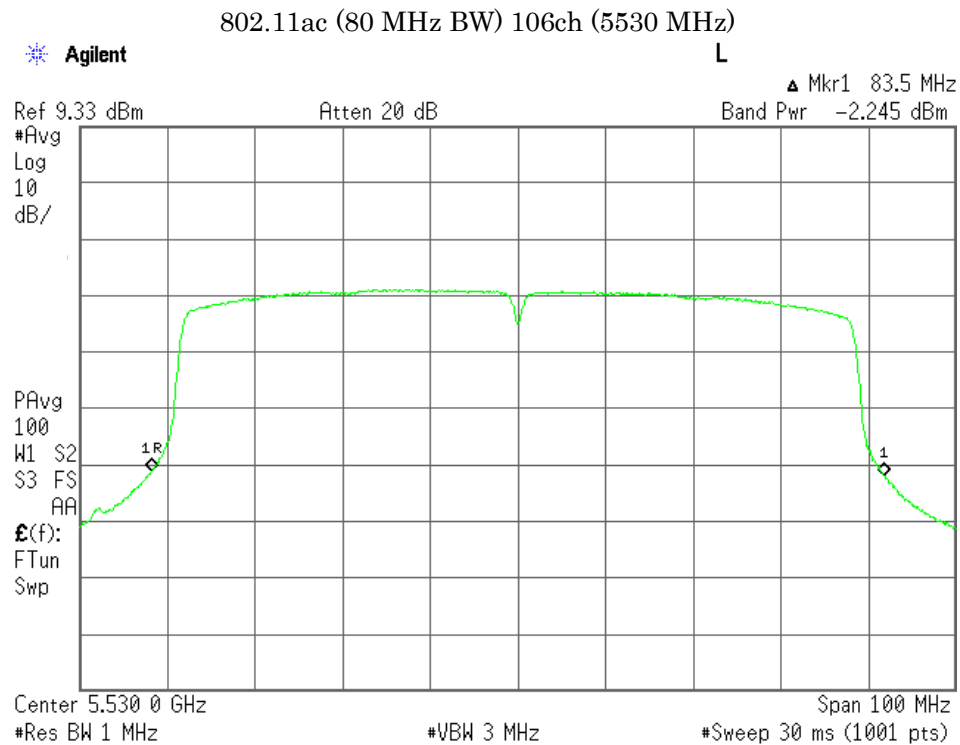

7.3 Peak Power Spectral Density

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.3.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 7.93 dB at 5320.0 MHz

Uncertainty of Measurement Results +/- 1.7 dB

Remarks : Worst case is 802.11a channel 64.

7.3.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The peak power spectral density measurements were carried out connecting to the spectrum analyzer. The EUT transmits non-continuously therefore the spectrum analyzer was set in accordance with KDB 789033 D02 Method SA-3 as follows;


Span: encompass the EBW/ RBW: 1 MHz/ VBW $\geq$ 3 MHz/ Sweep: Time: 100 msec.(enough to be short)/

Number Sweep Points: 1001 pts ($\geq 2 \times$ Span/RBW)/

Detector: RMS(power averaging)/ Trace Mode: Max. Hold

The peak marker function in the analyzer was use for finding the peak point.

(referred documentation is No. G70364M)

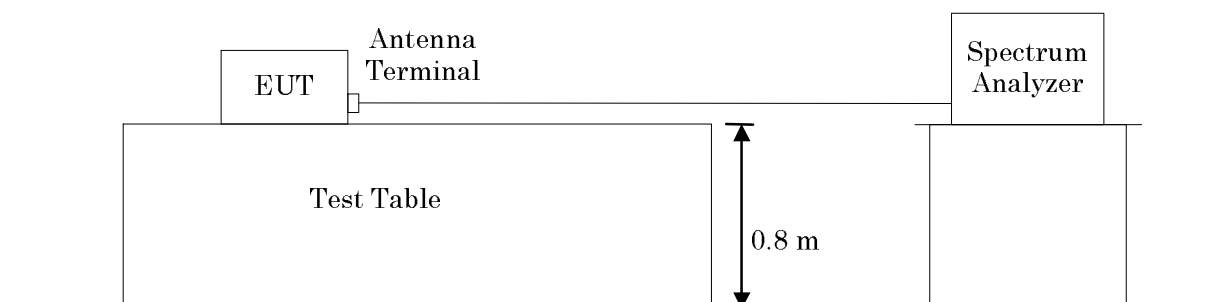

7.3.4 Test Data

7.3.4.1 802.11a Peak power spectral density

Test Date : March 11, 2015

Temp.: 21°C, Humi: 25%

Mode of EUT: Tx Mode (802.11a)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			PPSD (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total			
36	5180	10.83	-11.10	-11.40	-8.24	2.59	11.00	8.41
44	5220	10.83	-10.86	-11.19	-8.01	2.82	11.00	8.18
48	5240	10.83	-10.87	-11.16	-8.00	2.83	11.00	8.17
52	5260	10.82	-10.91	-11.16	-8.02	2.80	11.00	8.20
56	5280	10.82	-10.76	-11.10	-7.92	2.90	11.00	8.10
64	5320	10.84	-10.75	-10.82	-7.77	3.07	11.00	7.93
100	5500	10.84	-11.01	-11.18	-8.08	2.76	11.00	8.24
116	5580	10.84	-11.02	-11.60	-8.29	2.55	11.00	8.45
140	5700	10.85	-11.47	-12.05	-8.74	2.11	11.00	8.89

The test results (PPSD) is calculated as follows:


For 36 channel (5180 MHz)

$$\text{PPSD} = \text{Correction Factor} + \text{Meter Reading} = 10.83 + (-8.24) = 2.59 \text{ dBm}$$


Correction Factor = cable loss + 10 dB attenuator

a) Antenna 1 (ANT0)


802.11a 36ch (5180 MHz)

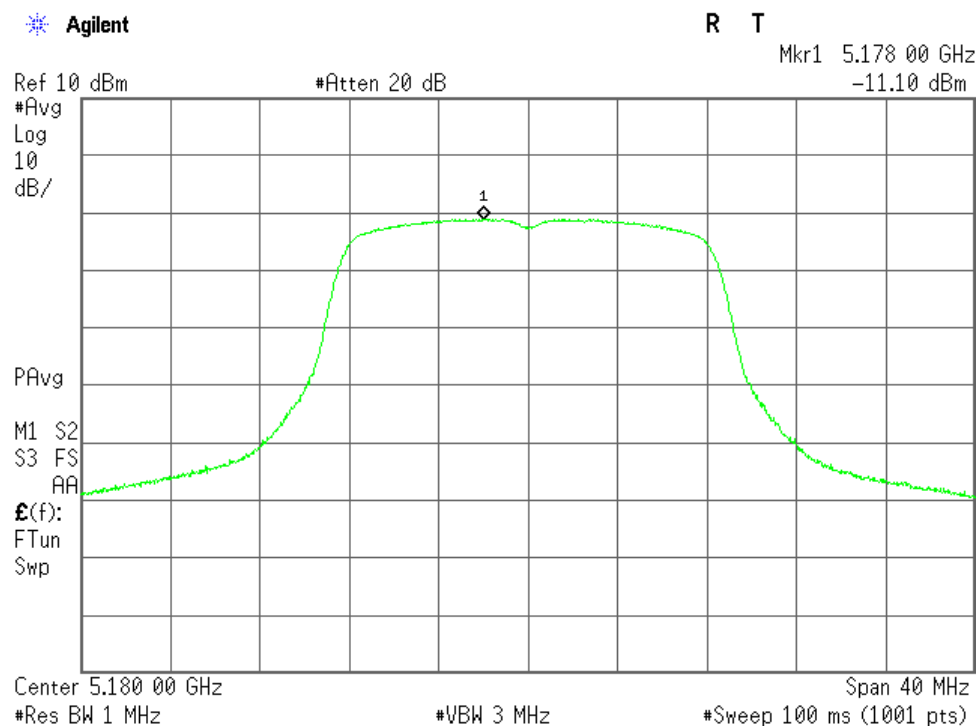


802.11a 44ch (5220 MHz)

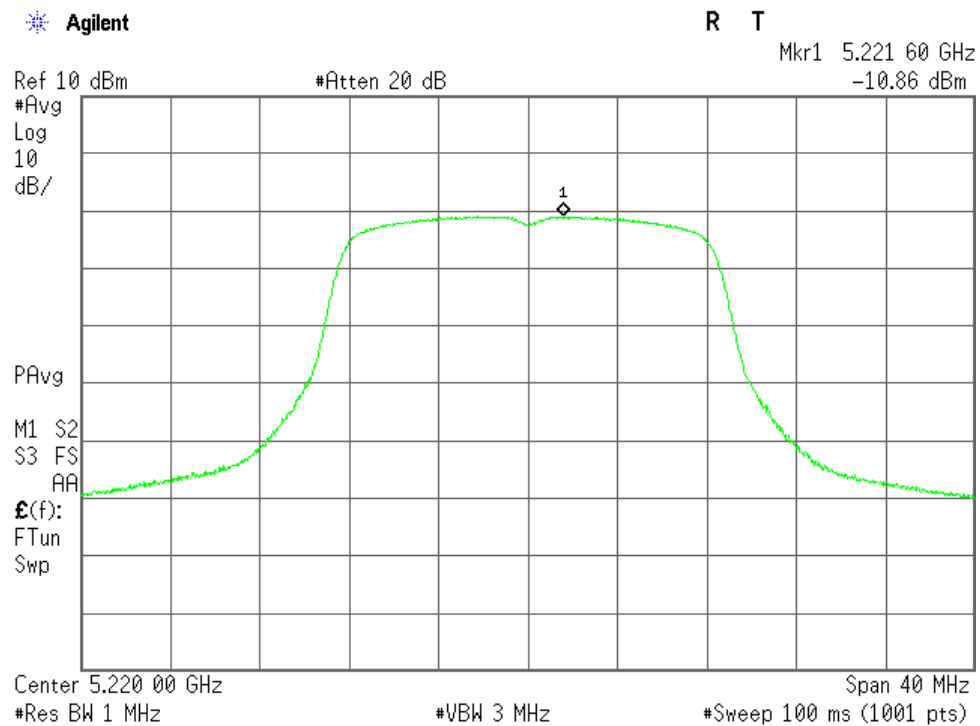


802.11a 48ch (5240 MHz)

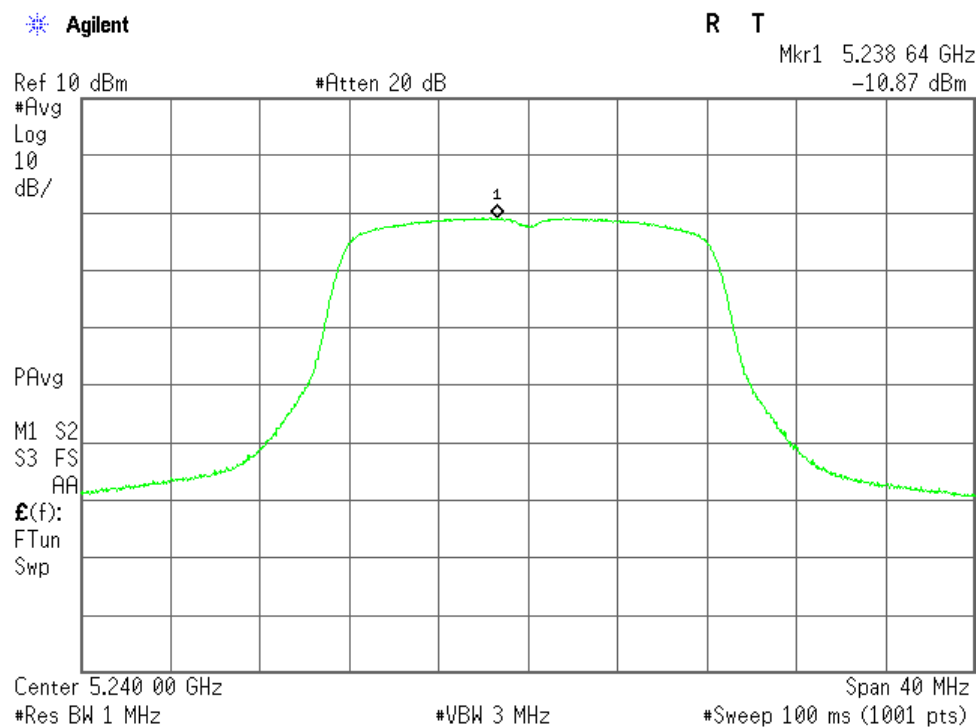


802.11a 52ch (5260 MHz)

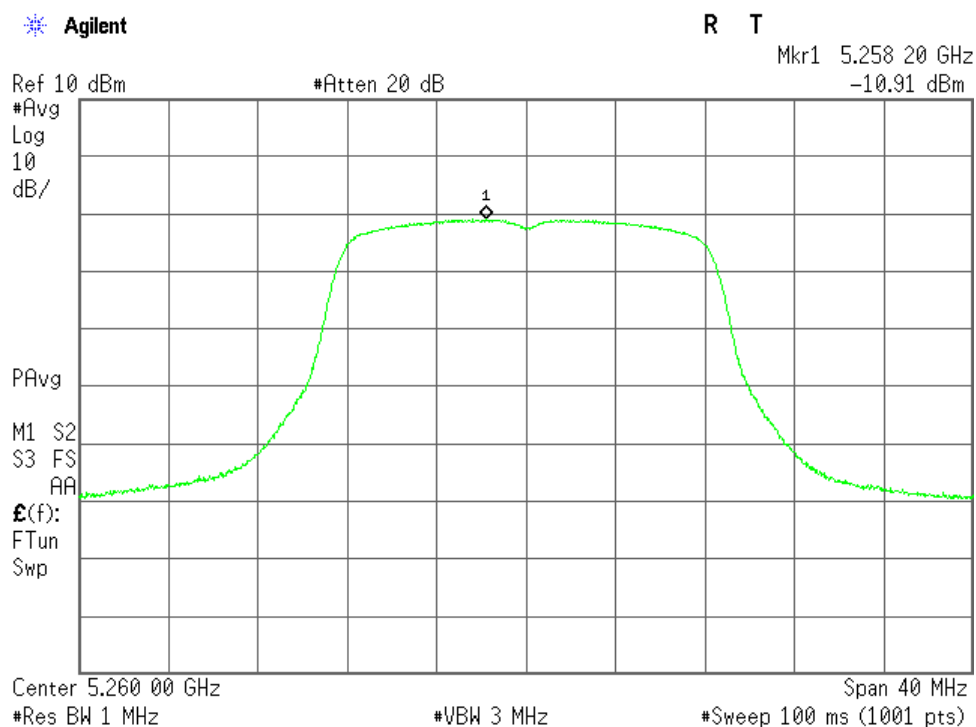


802.11a 56ch (5280 MHz)

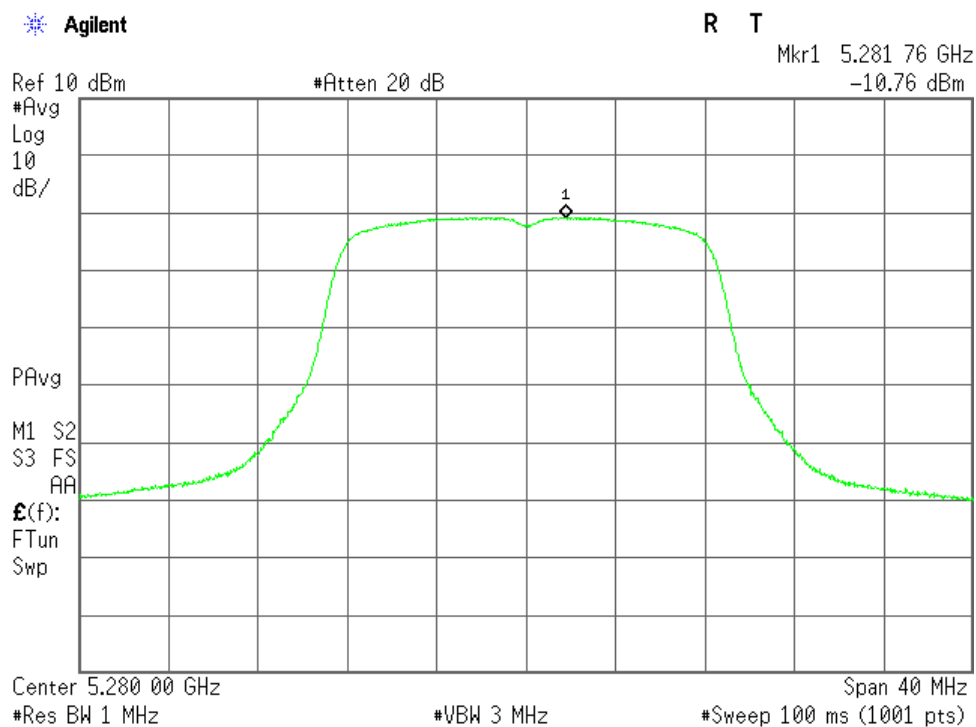


802.11a 64ch (5320 MHz)

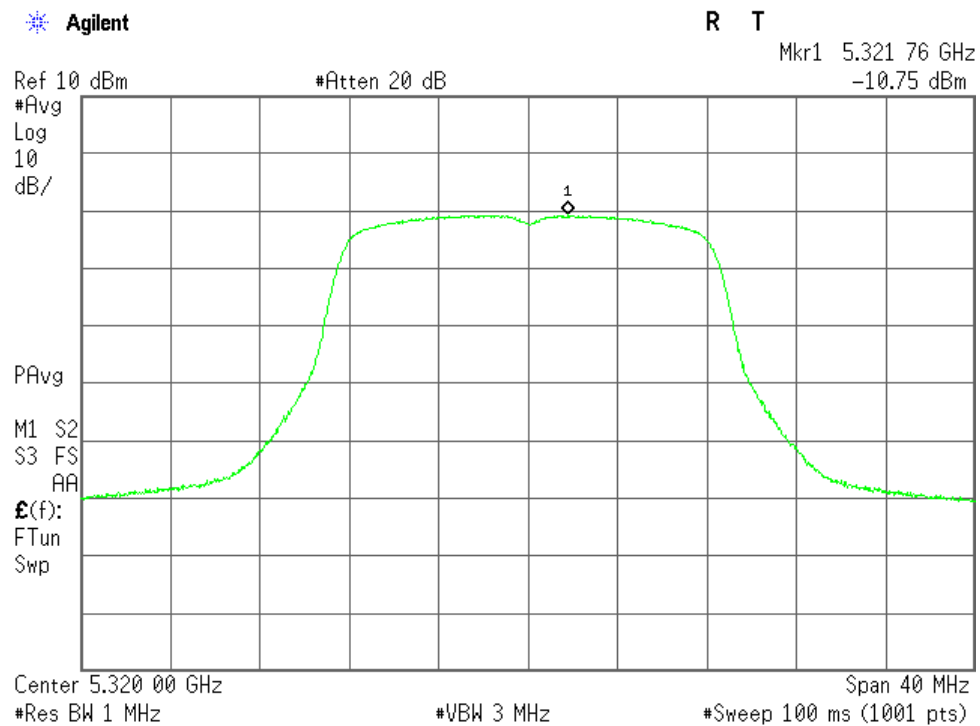


802.11a 100ch (5500 MHz)

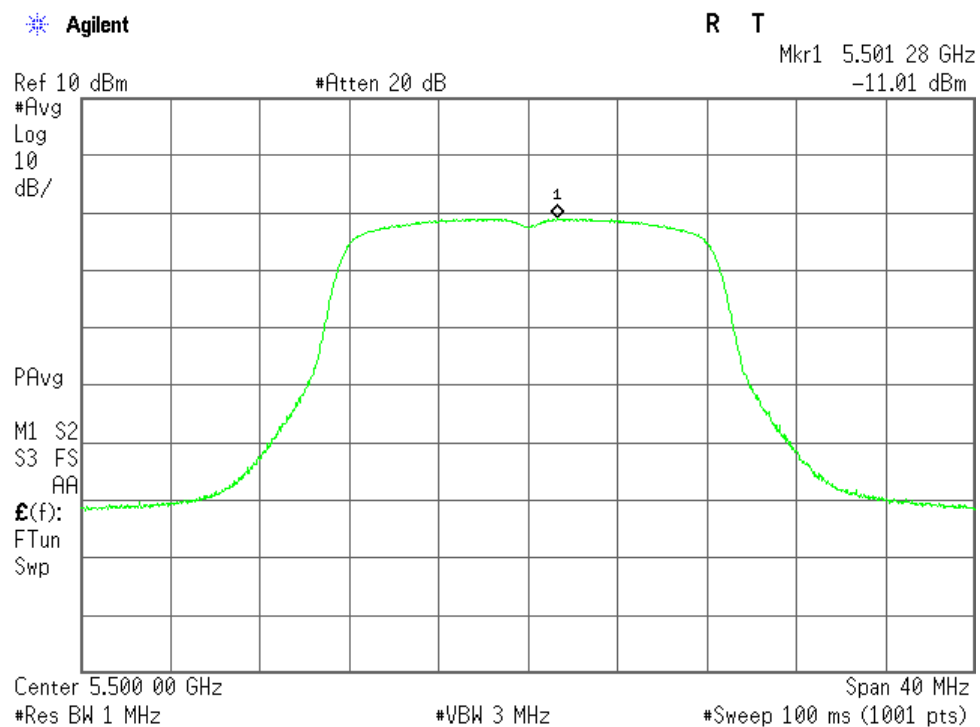

802.11a 116ch (5580 MHz)

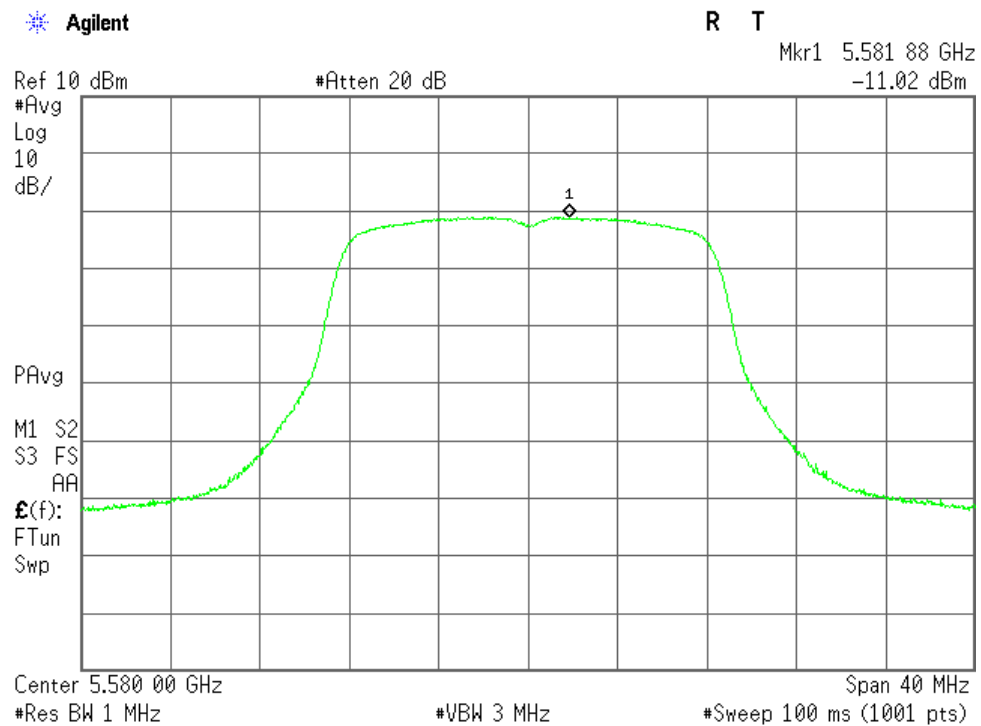


802.11a 140ch (5700 MHz)

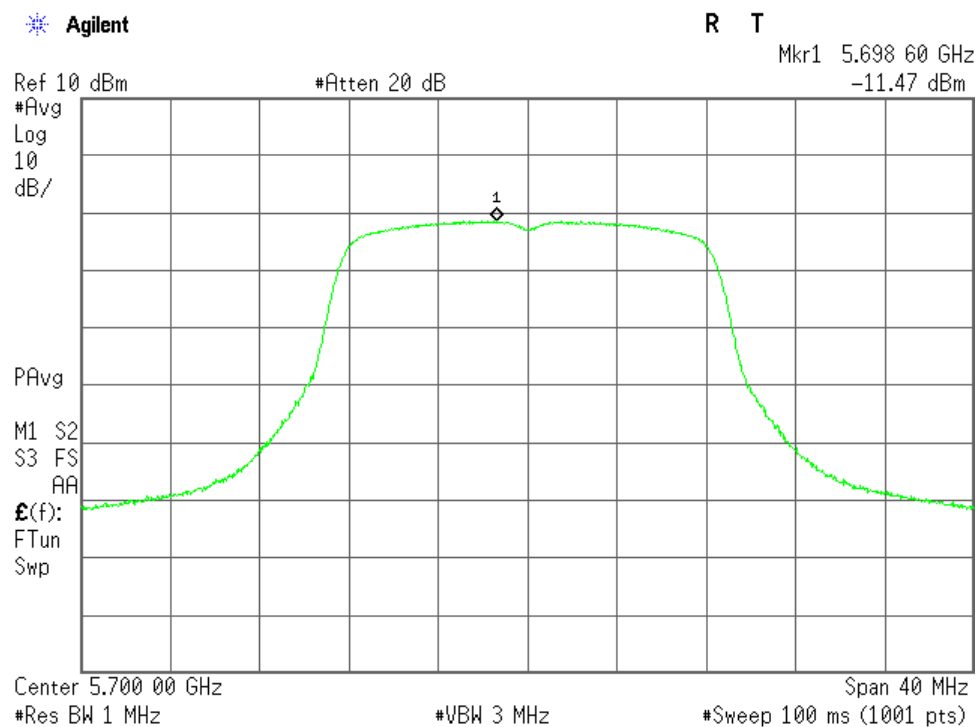


b) Antenna 2 (ANT1)


802.11a 36ch (5180 MHz)

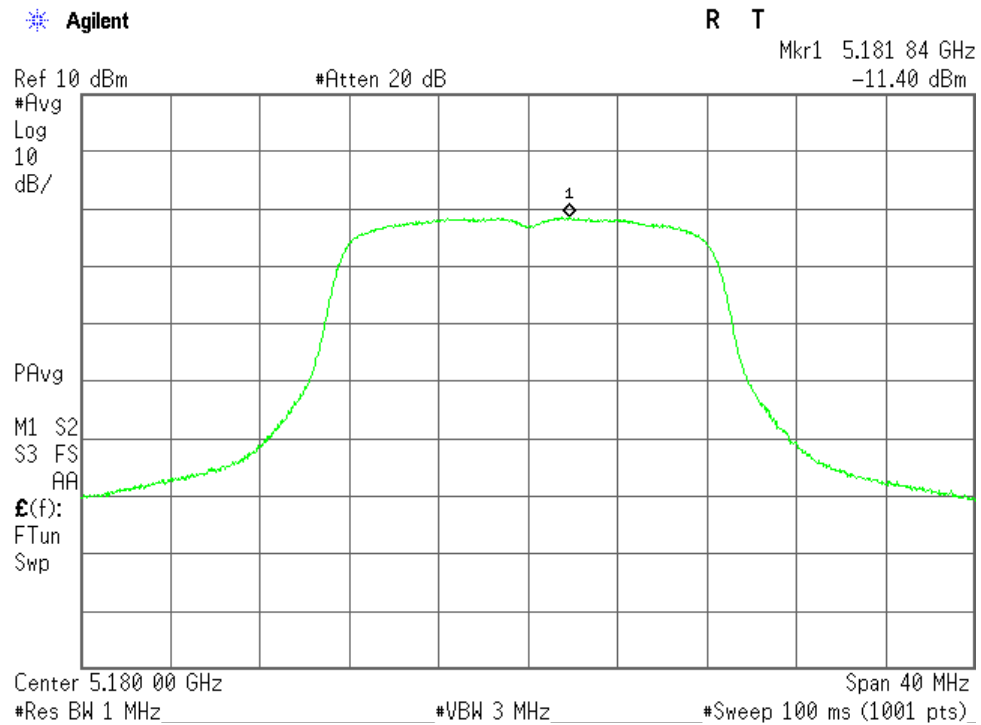


802.11a 44ch (5220 MHz)

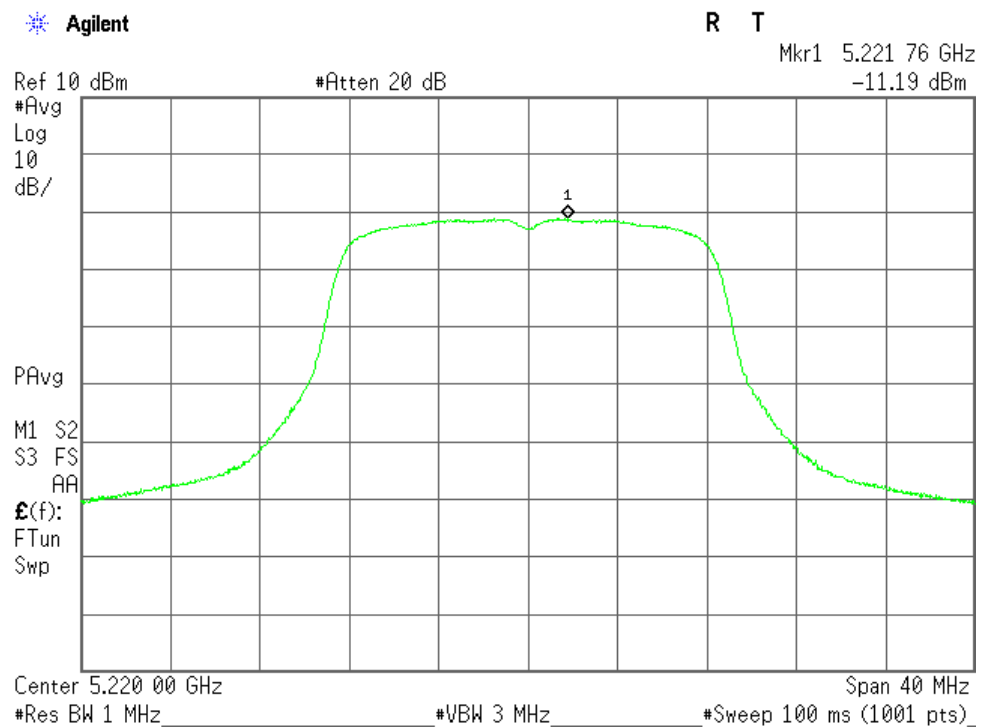


802.11a 48ch (5240 MHz)

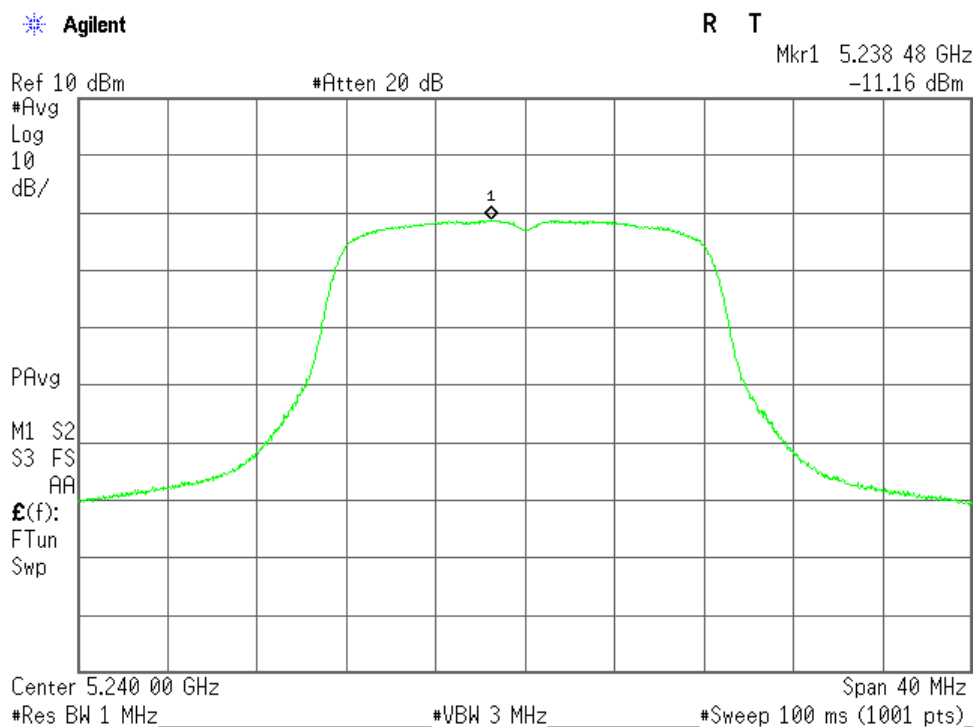


802.11a 52ch (5260 MHz)

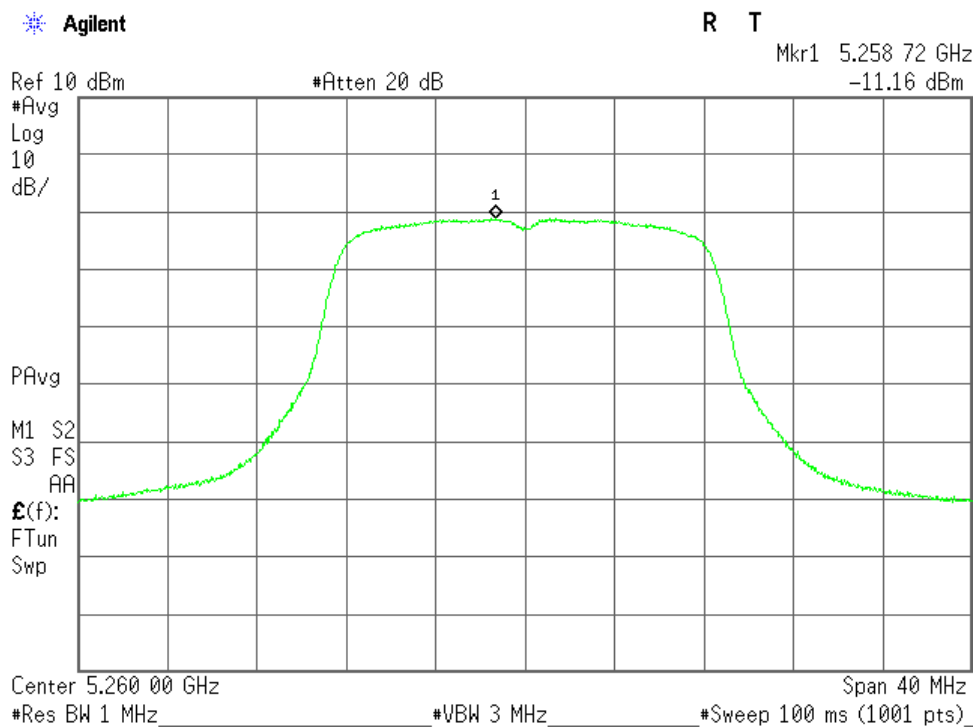


802.11a 56ch (5280 MHz)

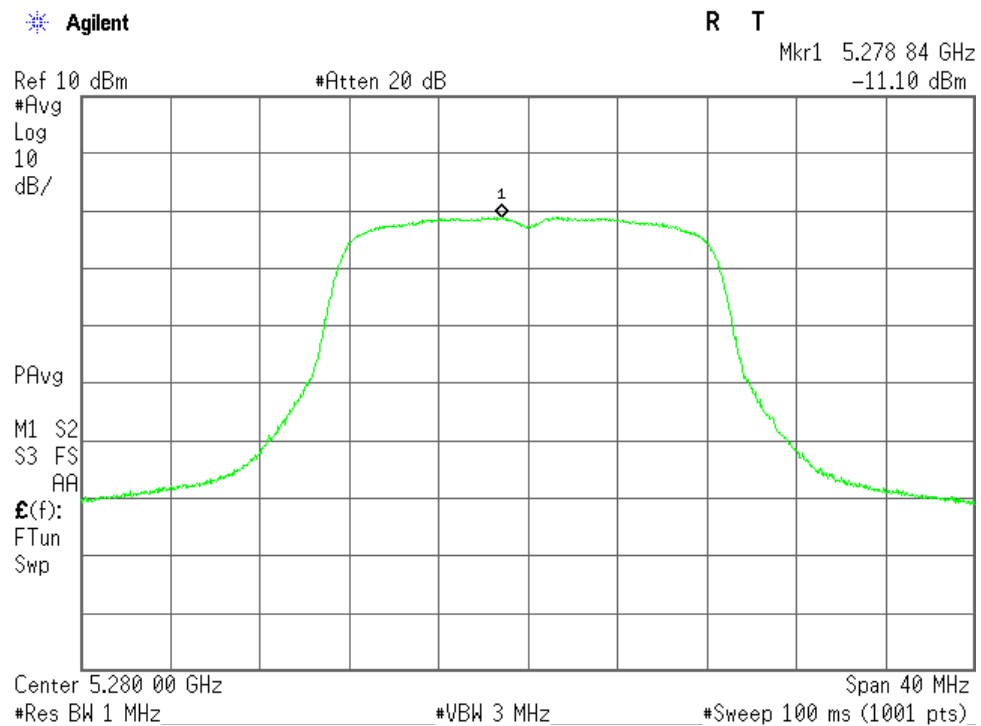


802.11a 64ch (5320 MHz)

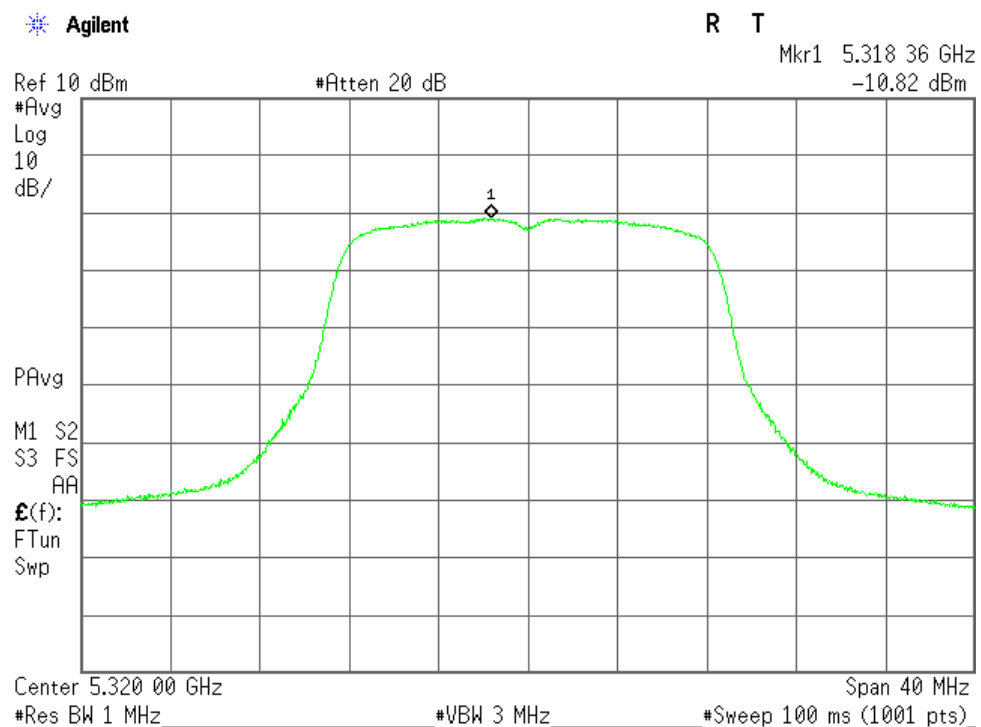


802.11a 100ch (5500 MHz)

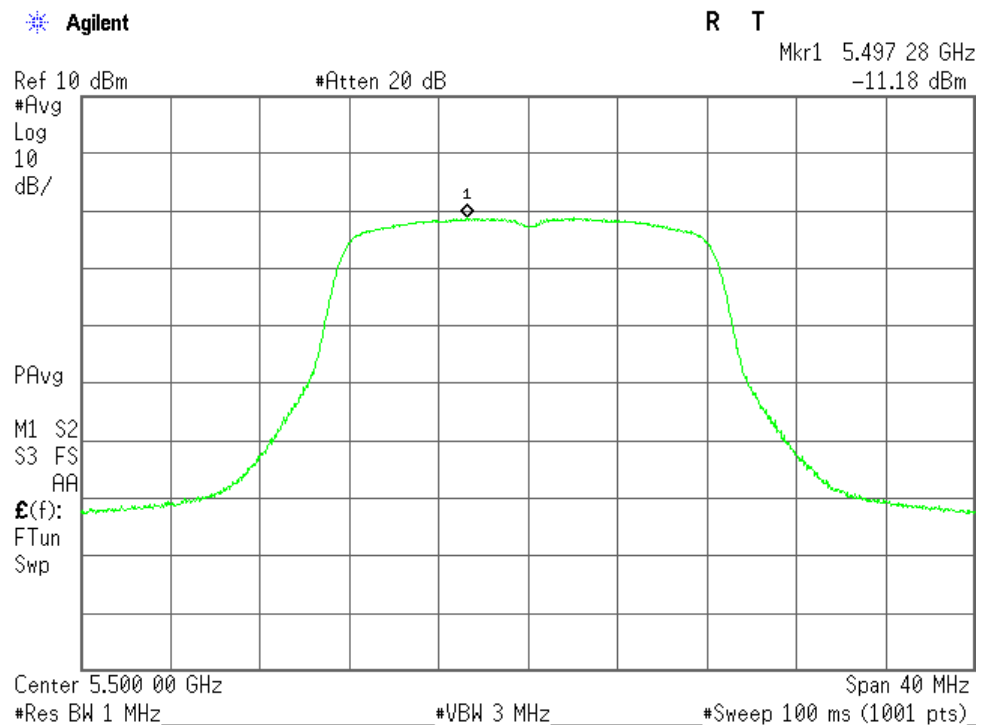

802.11a 116ch (5580 MHz)

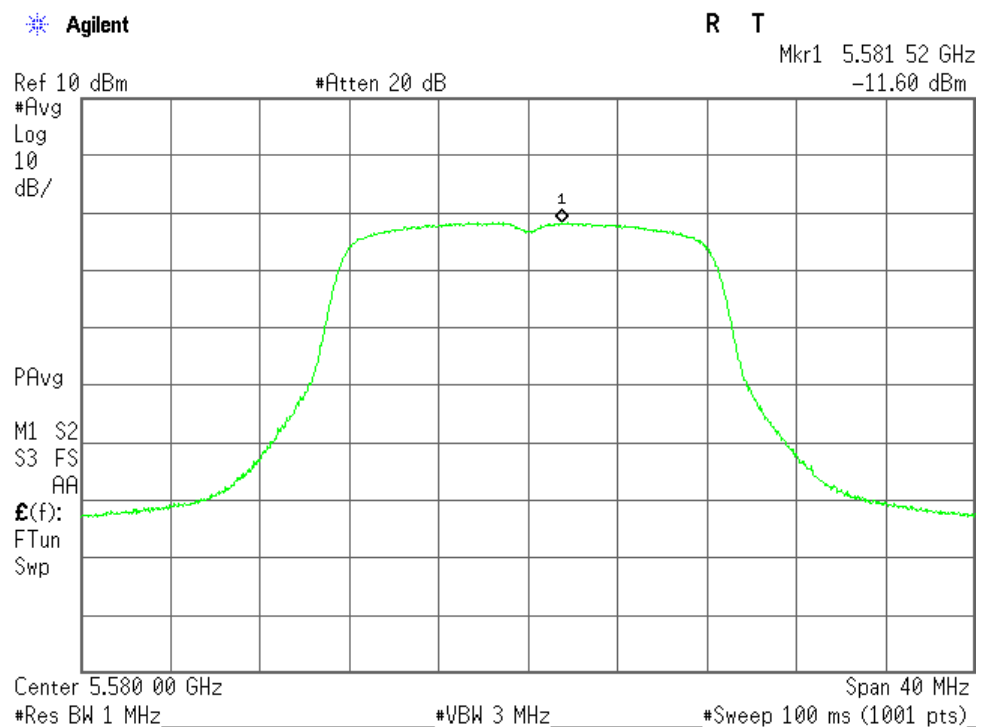

802.11a 140ch (5700 MHz)

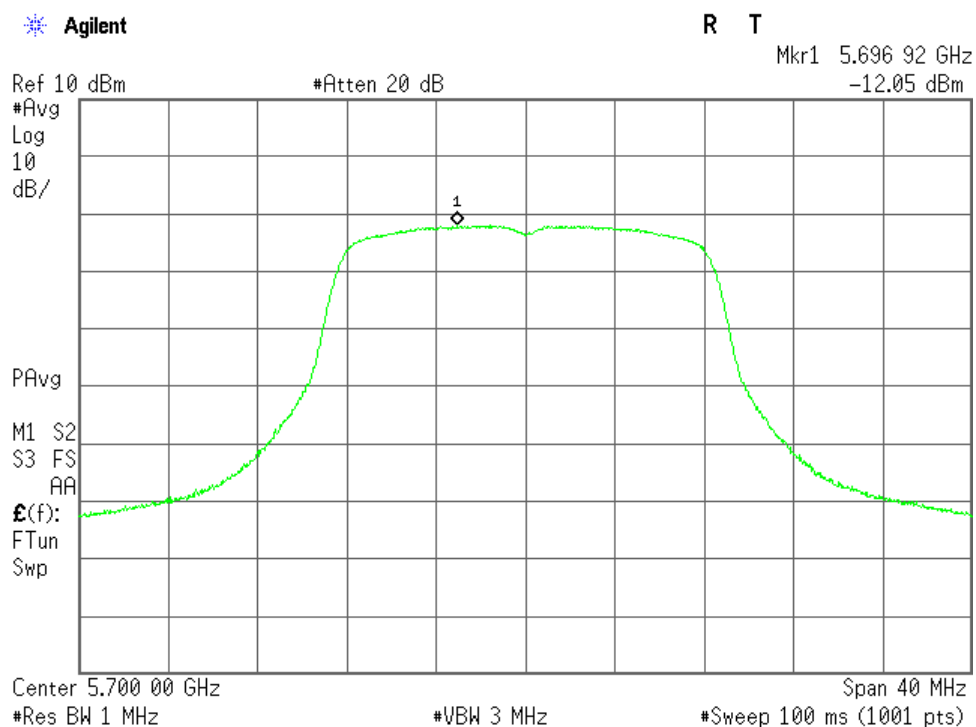

7.3.4.2 802.11n (20 MHz BW) Peak power spectral density

Mode of EUT: Tx Mode (802.11n: 20 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			PPSD (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total			
36	5180	10.83	-11.71	-11.71	-8.70	2.13	11.00	8.87
44	5220	10.83	-11.48	-11.71	-8.58	2.25	11.00	8.75
48	5240	10.83	-11.43	-11.71	-8.56	2.27	11.00	8.73
52	5260	10.82	-11.41	-11.69	-8.54	2.28	11.00	8.72
56	5280	10.82	-11.17	-11.39	-8.27	2.55	11.00	8.45
64	5320	10.84	-11.11	-11.49	-8.28	2.56	11.00	8.44
100	5500	10.84	-11.31	-11.70	-8.49	2.35	11.00	8.65
116	5580	10.84	-11.65	-11.91	-8.77	2.07	11.00	8.93
140	5700	10.85	-12.21	-12.11	-9.15	1.70	11.00	9.30

The test results (PPSD) is calculated as follows:


For 36 channel (5180 MHz)

$$\text{PPSD} = \text{Correction Factor} + \text{Meter Reading} = 10.83 + (-8.70) = 2.12 \text{ dBm}$$


Correction Factor = cable loss + 10 dB attenuator

a) Antenna 1 (ANT0)


802.11n (20 MHz BW) 36ch (5180 MHz)

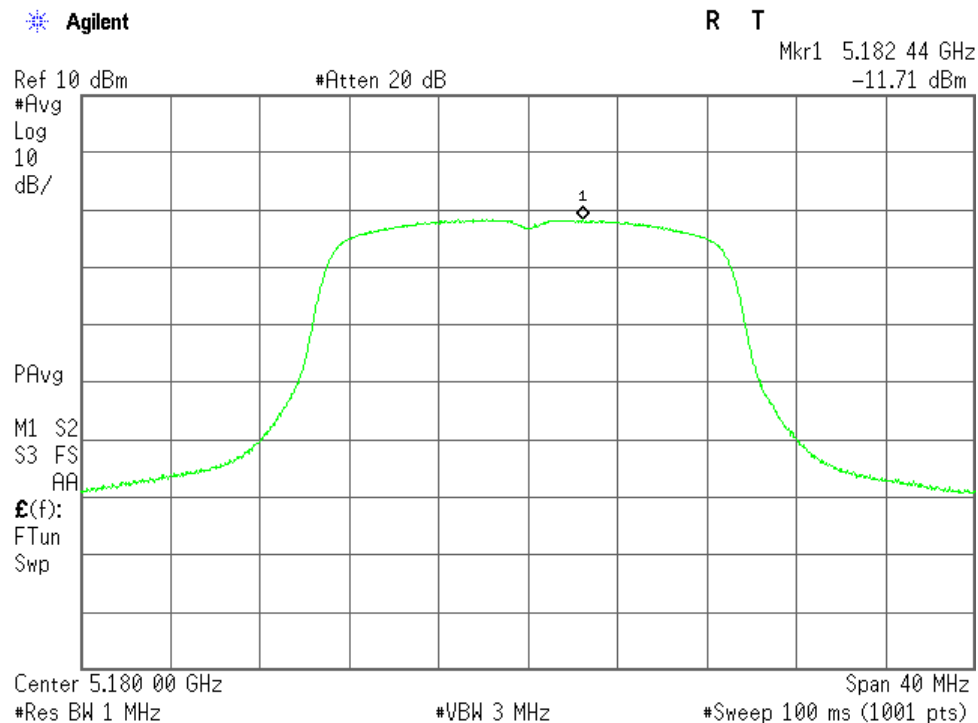


802.11n (20 MHz BW) 44ch (5220 MHz)

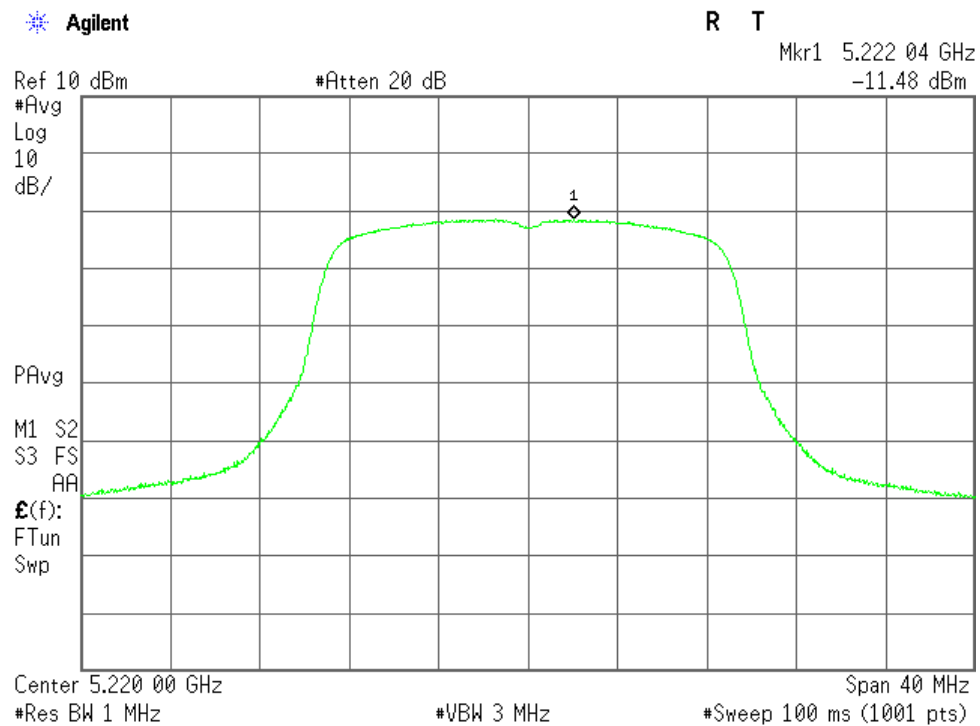


802.11n (20 MHz BW) 48ch (5240 MHz)

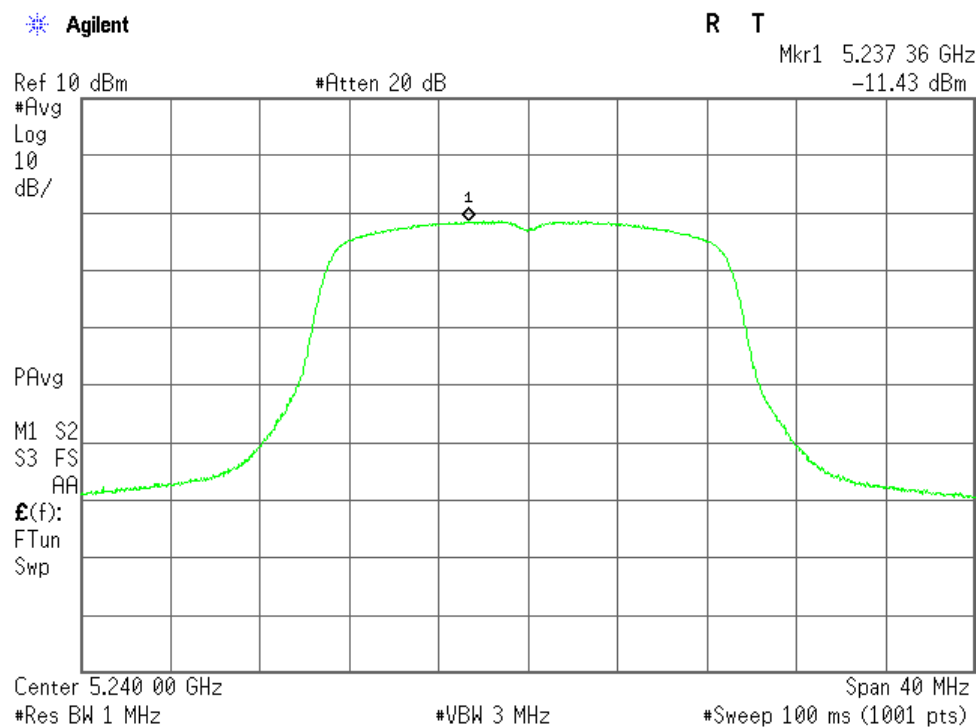


802.11n (20 MHz BW) 52ch (5260 MHz)

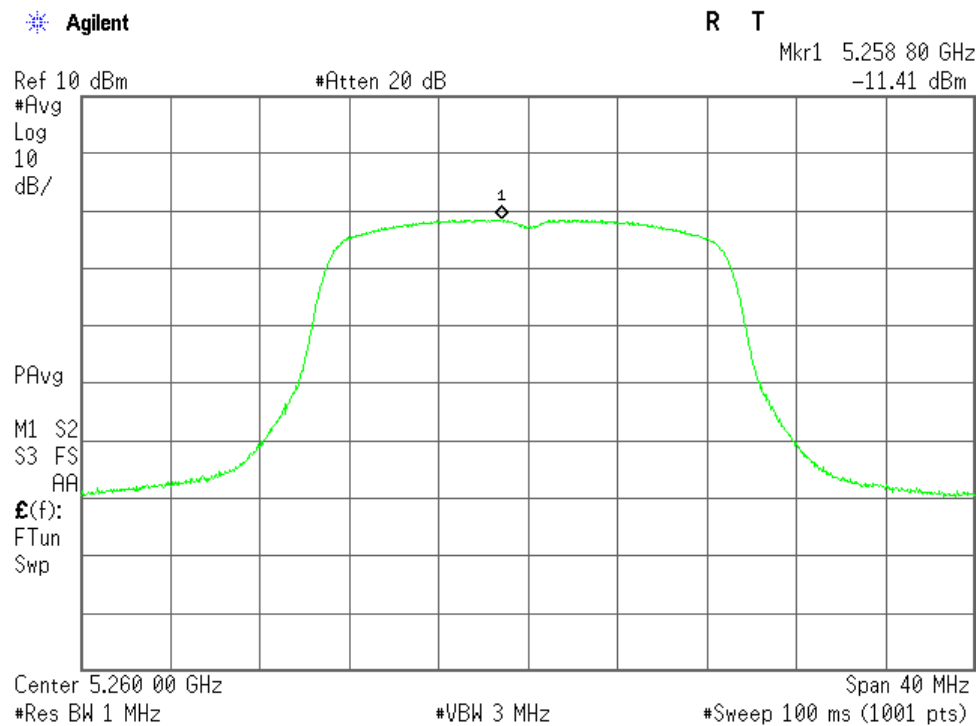


802.11n (20 MHz BW) 56ch (5280 MHz)

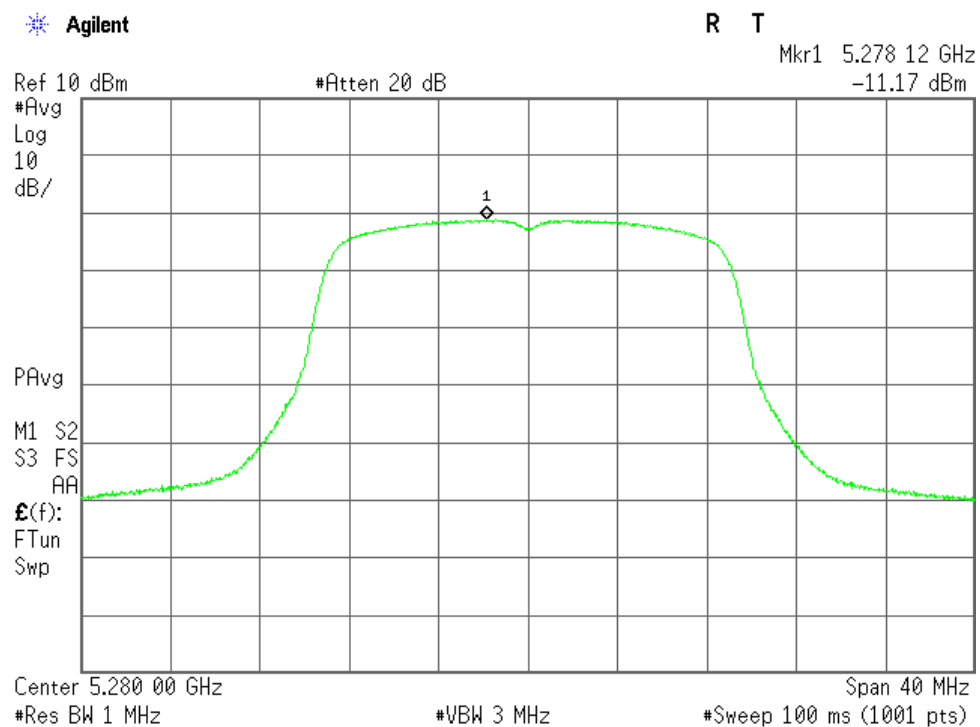


802.11n (20 MHz BW) 64ch (5320 MHz)

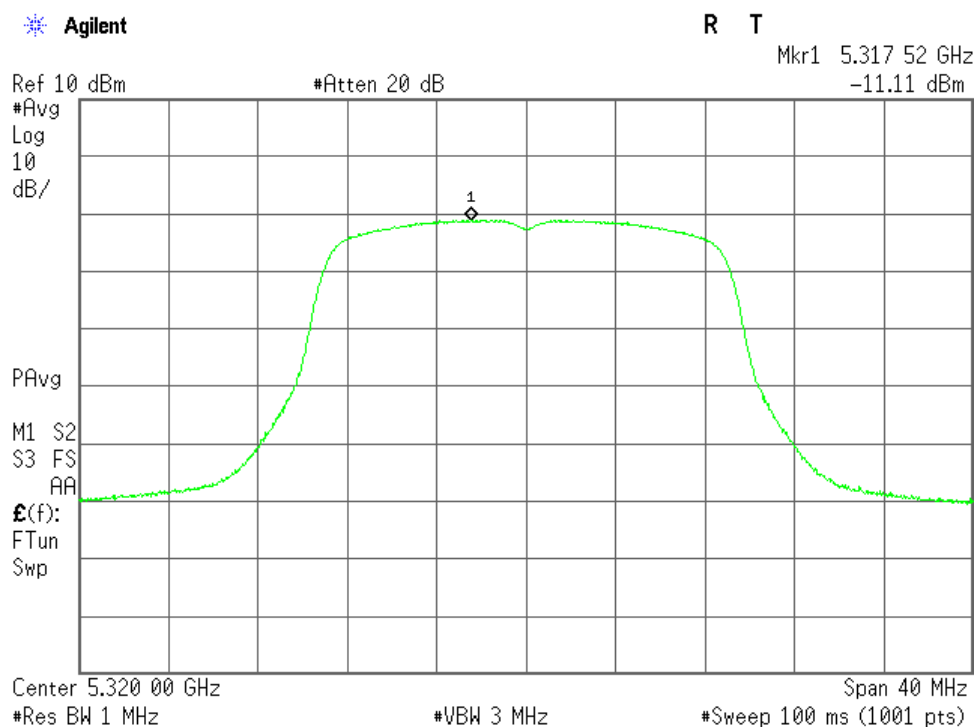


802.11n (20 MHz BW) 100ch (5500 MHz)

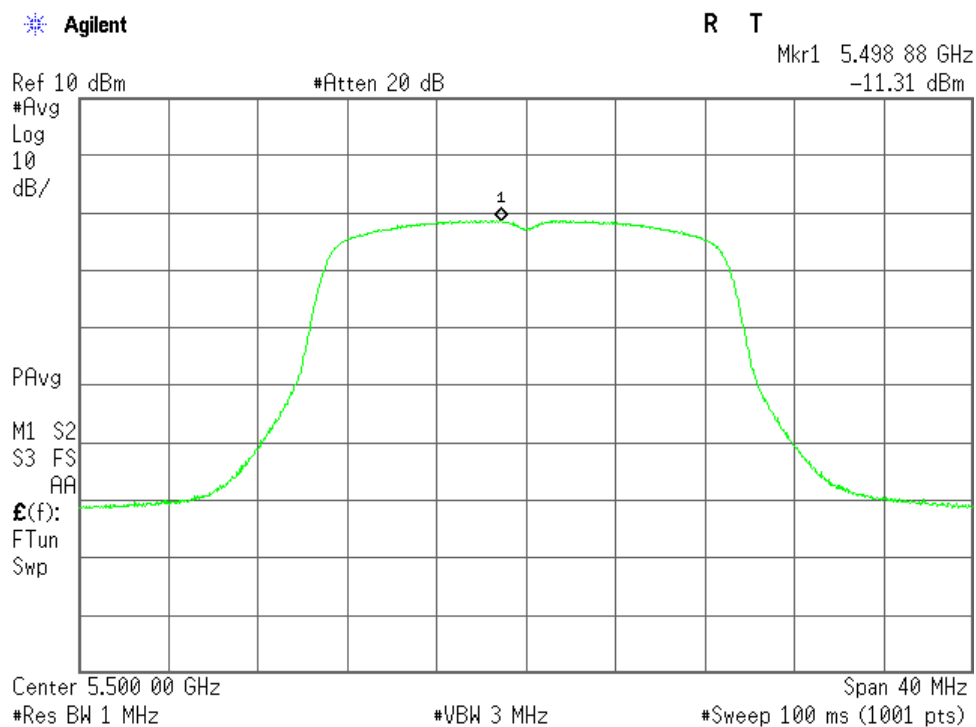

802.11n (20 MHz BW) 116ch (5580 MHz)

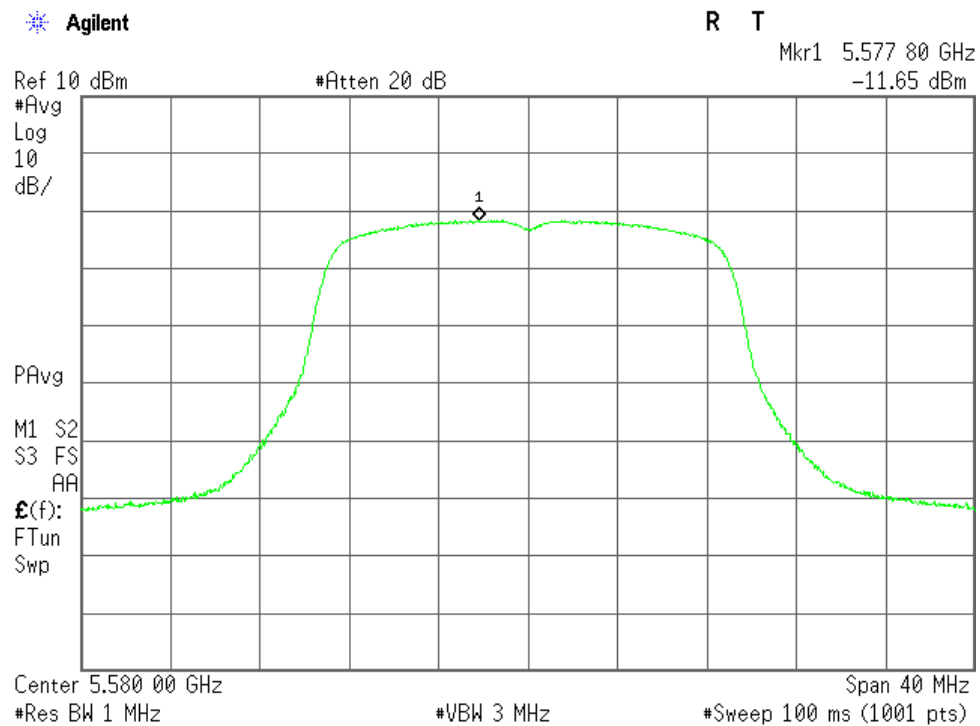


802.11n (20 MHz) 140ch (5700 MHz)

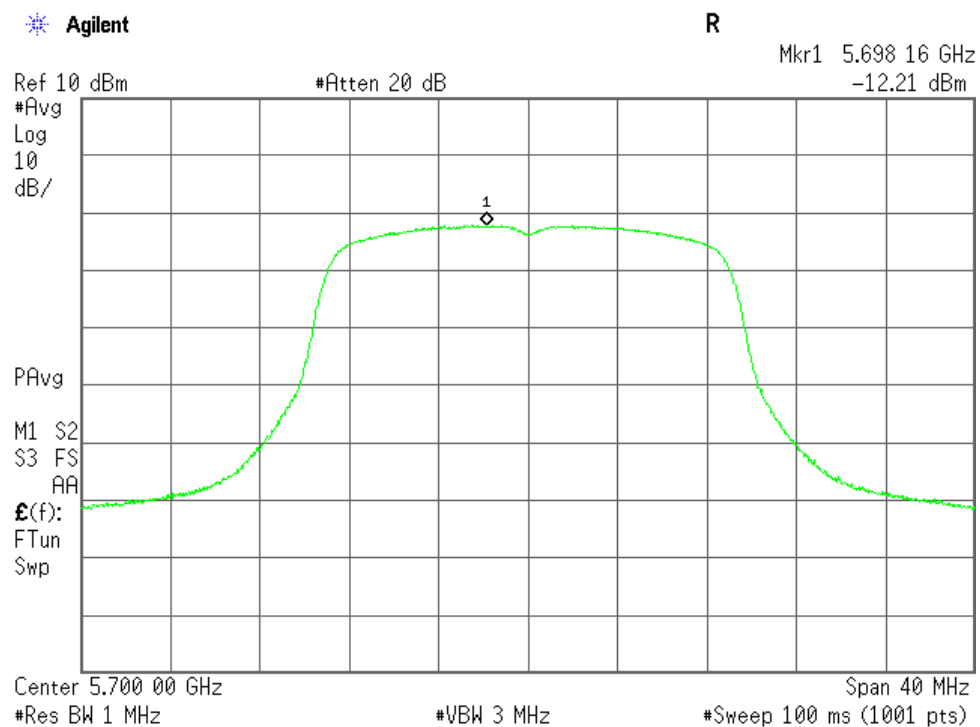


b) Antenna 2 (ANT1)


802.11n (20 MHz BW) 36ch (5180 MHz)

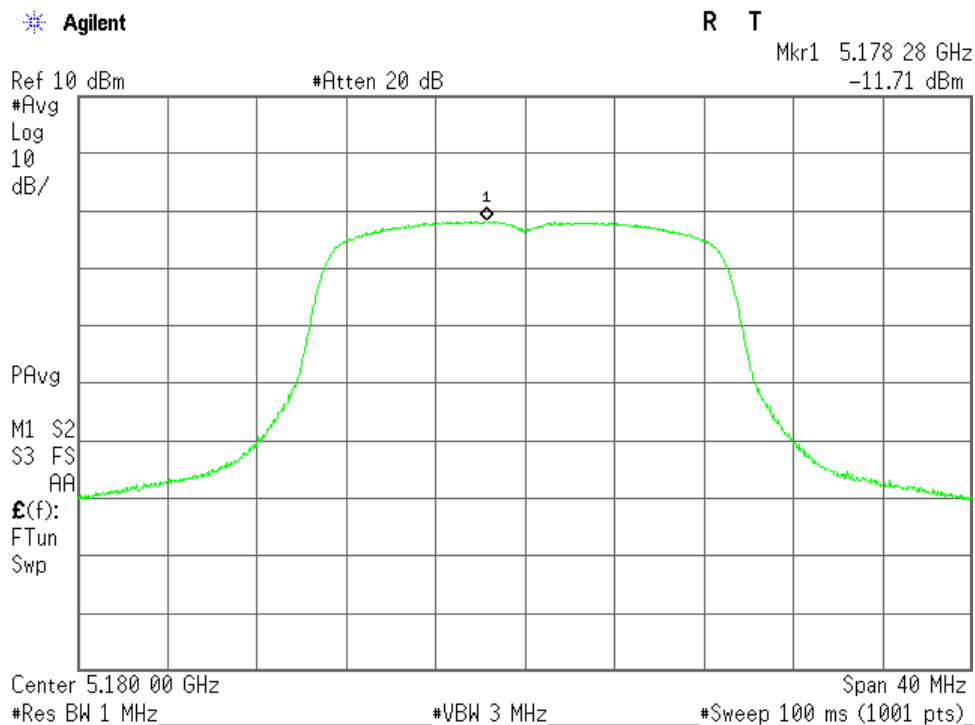


802.11n (20 MHz BW) 44ch (5220 MHz)

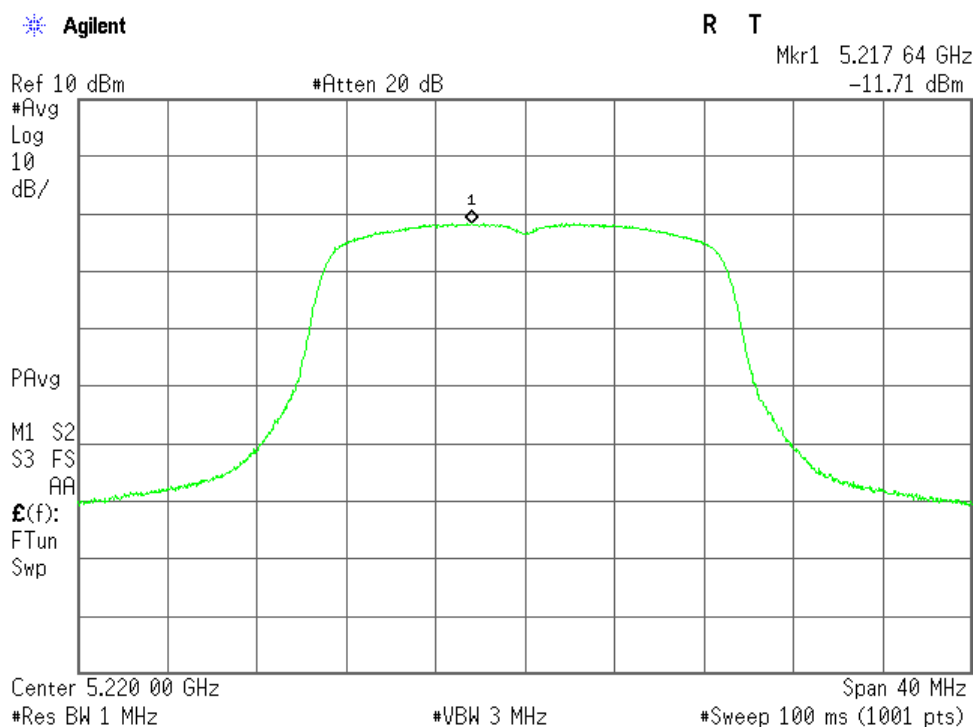


802.11n (20 MHz BW) 48ch (5240 MHz)

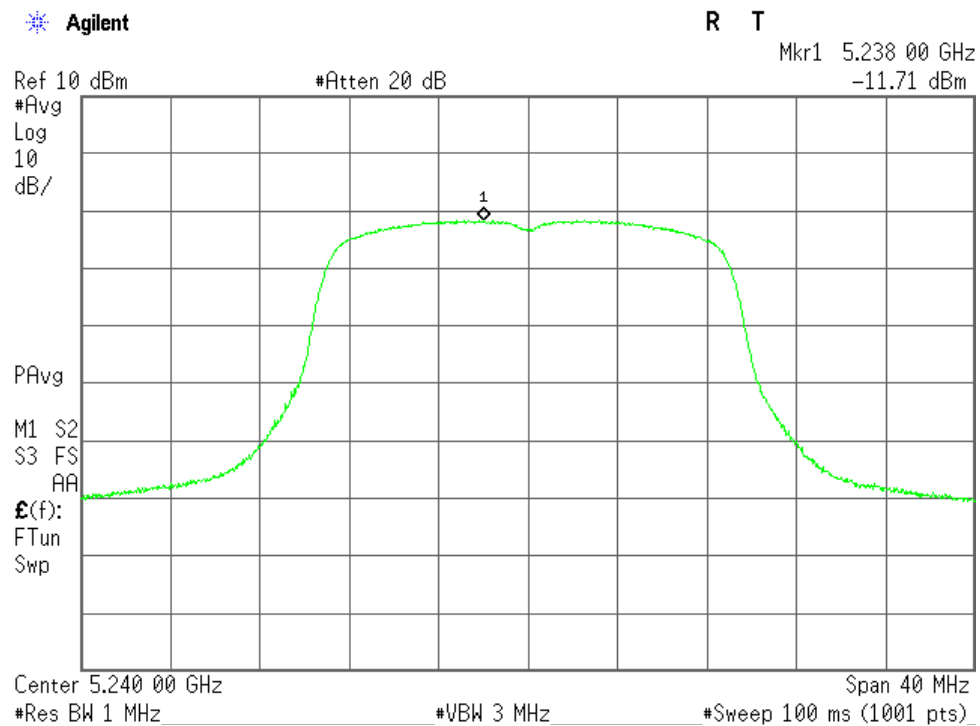


802.11n (20 MHz BW) 52ch (5260 MHz)

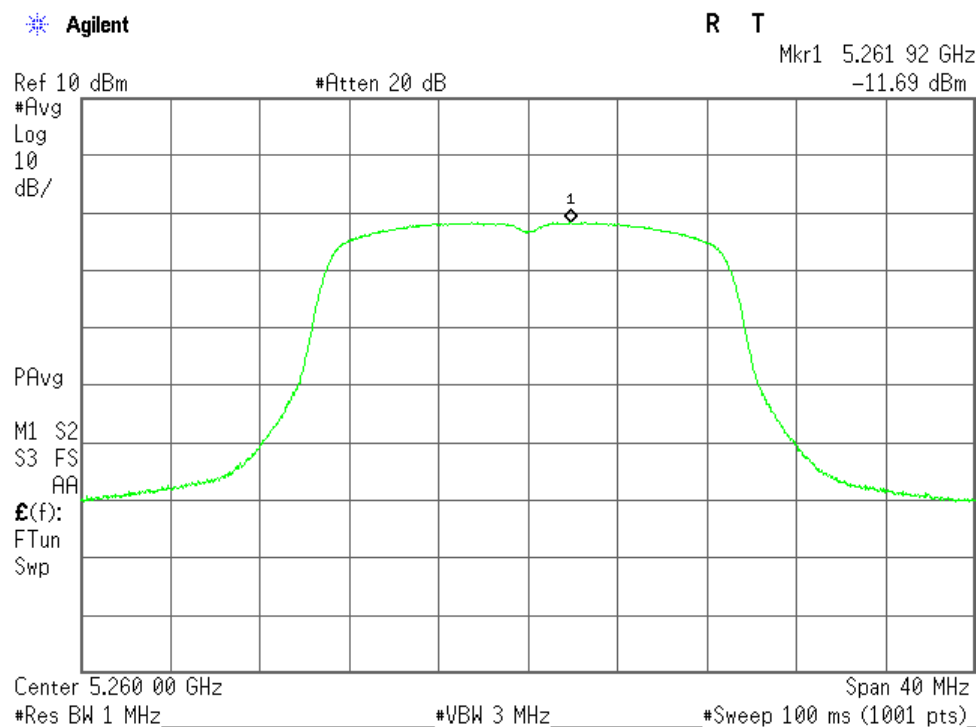


802.11n (20 MHz BW) 56ch (5280 MHz)

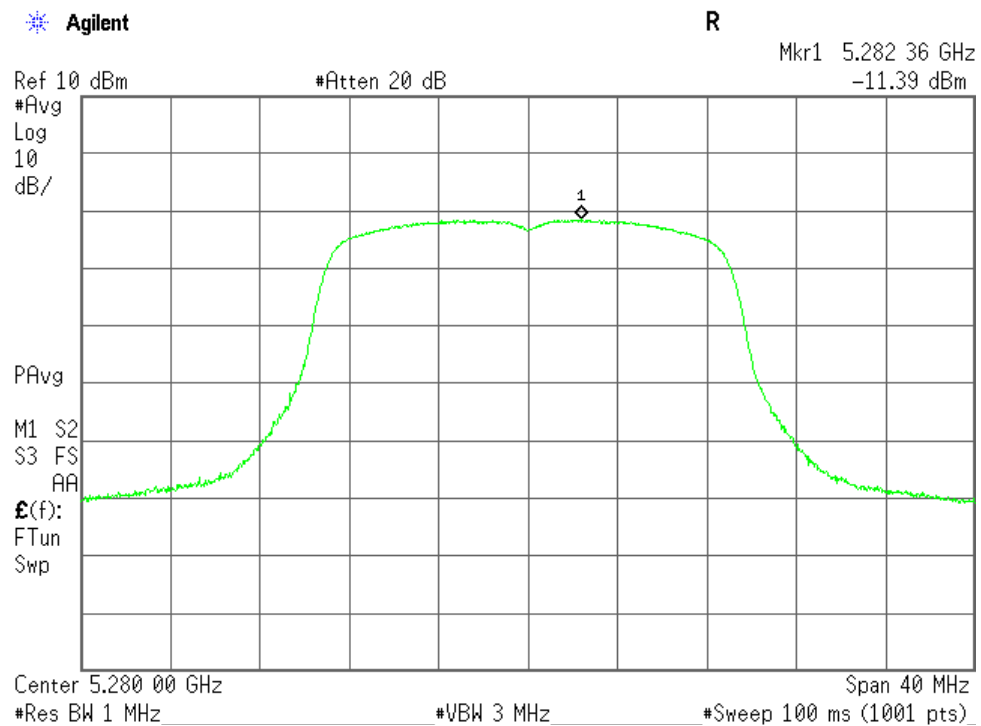


802.11n (20 MHz BW) 64ch (5320 MHz)

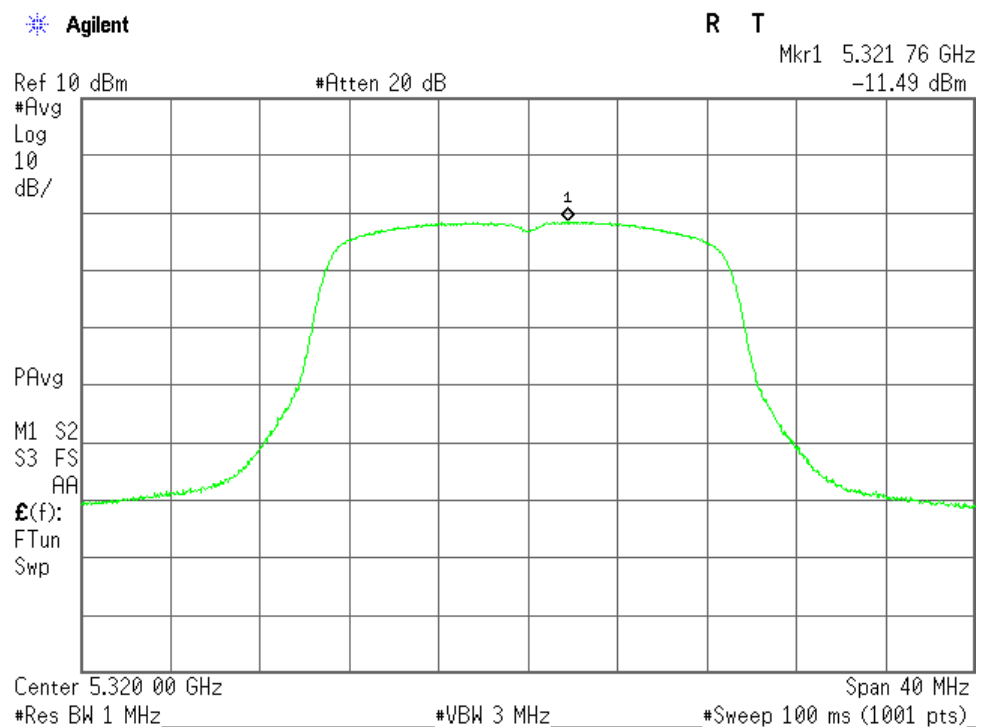


802.11n (20 MHz BW) 100ch (5500 MHz)

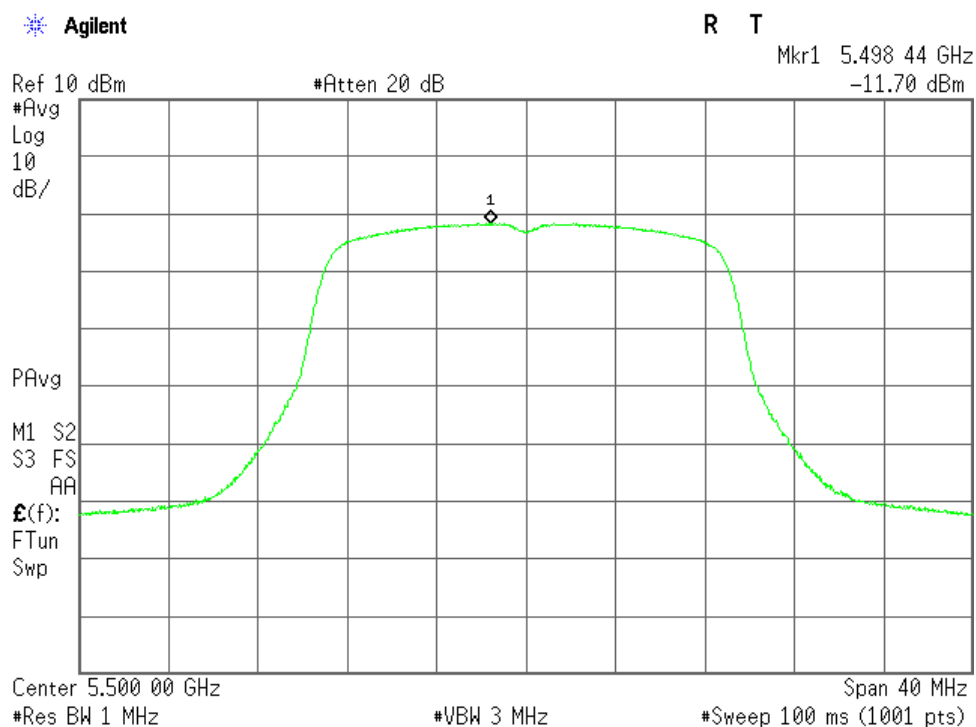

802.11n (20 MHz BW) 116ch (5580 MHz)

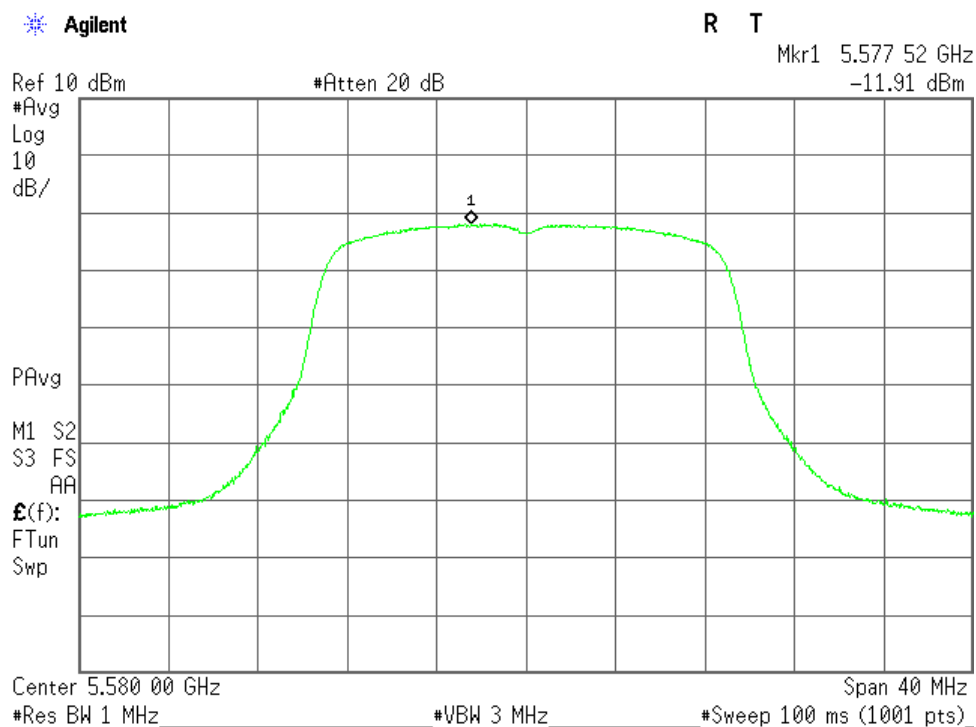

802.11n (20 MHz) 140ch (5700 MHz)

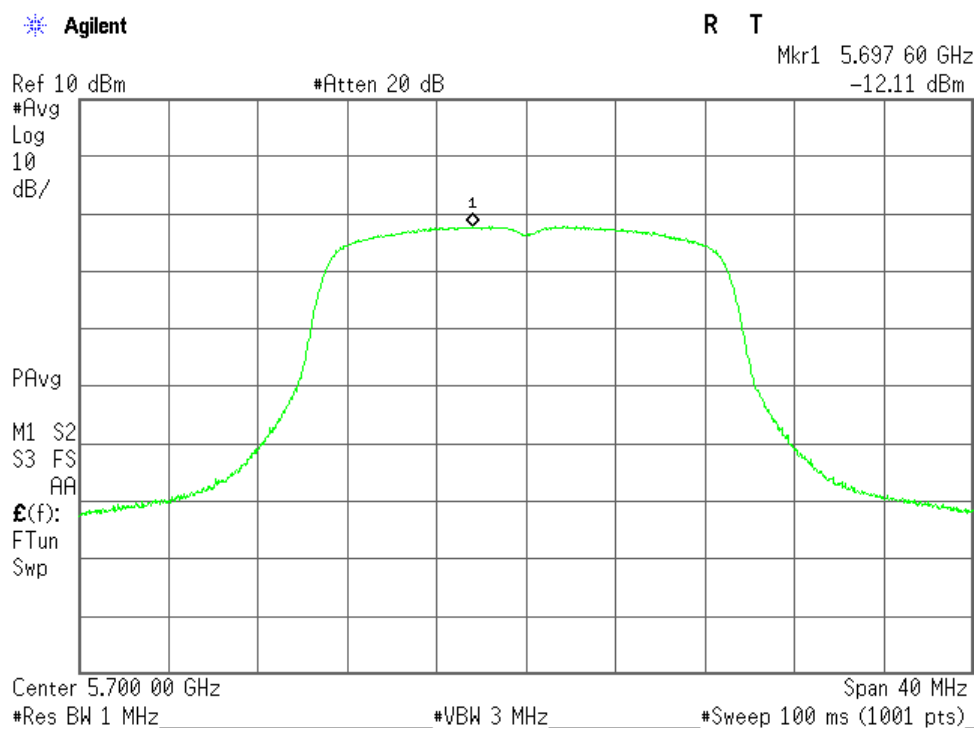

7.3.4.3 802.11n (40 MHz BW) Peak power spectral density

Mode of EUT: Tx Mode (802.11n: 40 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			PPSD (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total			
38	5190	10.83	-14.40	-14.35	-11.36	-0.53	11.00	11.53
46	5230	10.83	-14.11	-14.10	-11.09	-0.26	11.00	11.26
54	5270	10.82	-14.32	-14.16	-11.23	-0.41	11.00	11.41
62	5310	10.84	-13.91	-14.05	-10.97	-0.13	11.00	11.13
102	5510	10.84	-14.20	-14.30	-11.24	-0.40	11.00	11.40
134	5670	10.85	-15.02	-14.72	-11.85	-1.00	11.00	12.00

The test results (PPSD) is calculated as follows;


For 38 channel (5190 MHz)

$$\text{PPSD} = \text{Correction Factor} + \text{Meter Reading} = 10.83 + (-11.36) = -0.53 \text{ dBm}$$


Correction Factor = cable loss + 10 dB attenuator

a) Antenna 1 (ANT0)


802.11n (40 MHz BW) 38ch (5190 MHz)

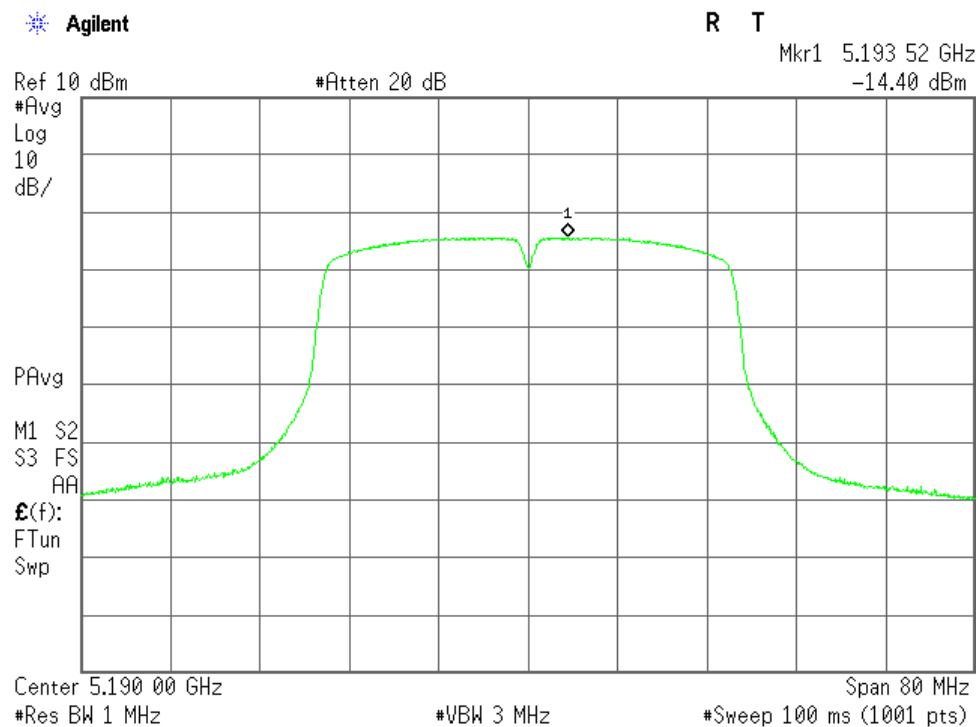


802.11n (40 MHz BW) 46ch (5230 MHz)

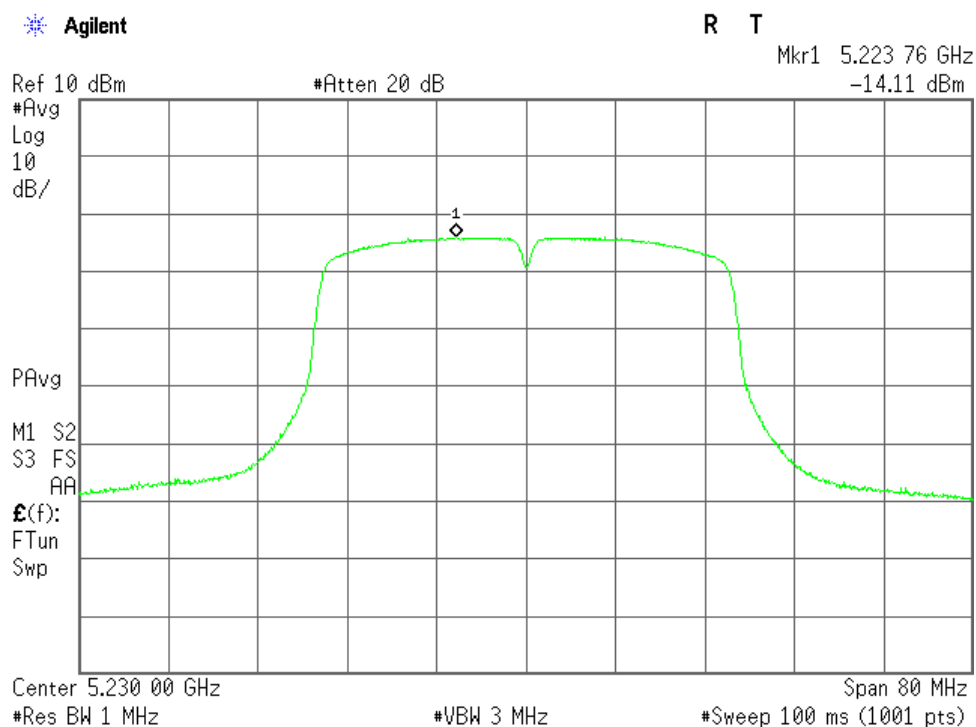


802.11n (40 MHz BW) 54ch (5270 MHz)

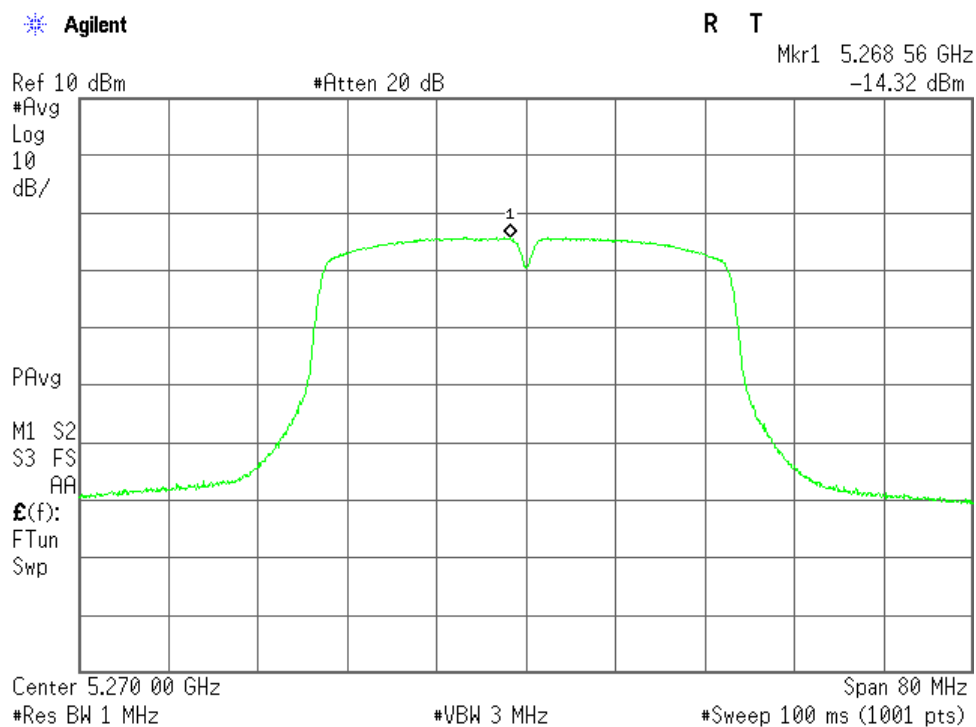


802.11n (40 MHz BW) 62ch (5310 MHz)

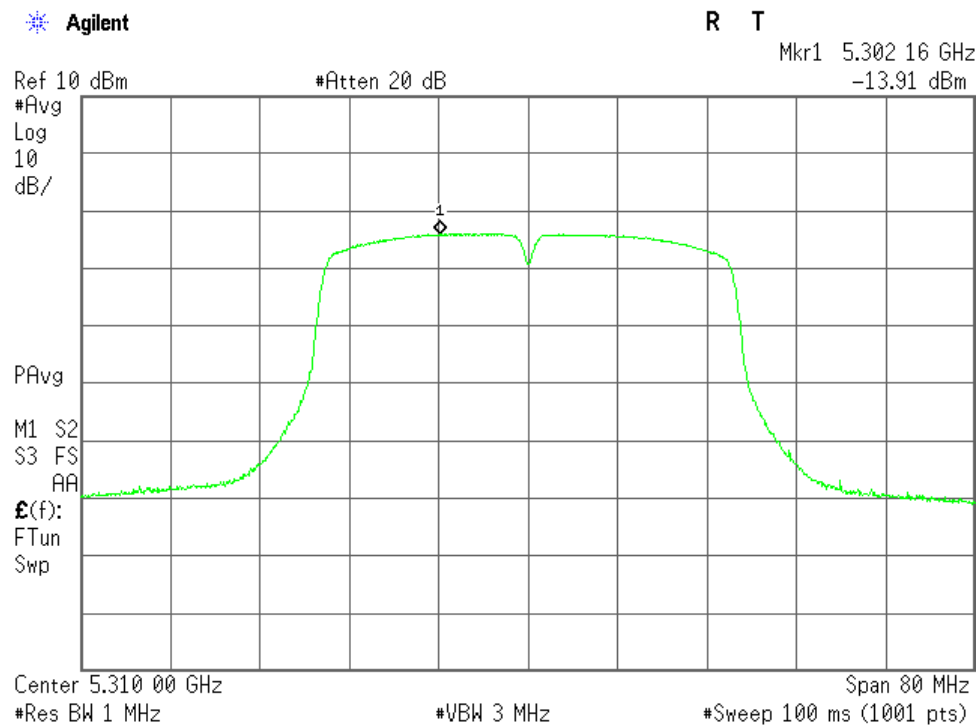

802.11n (40 MHz BW) 102ch (5510 MHz)

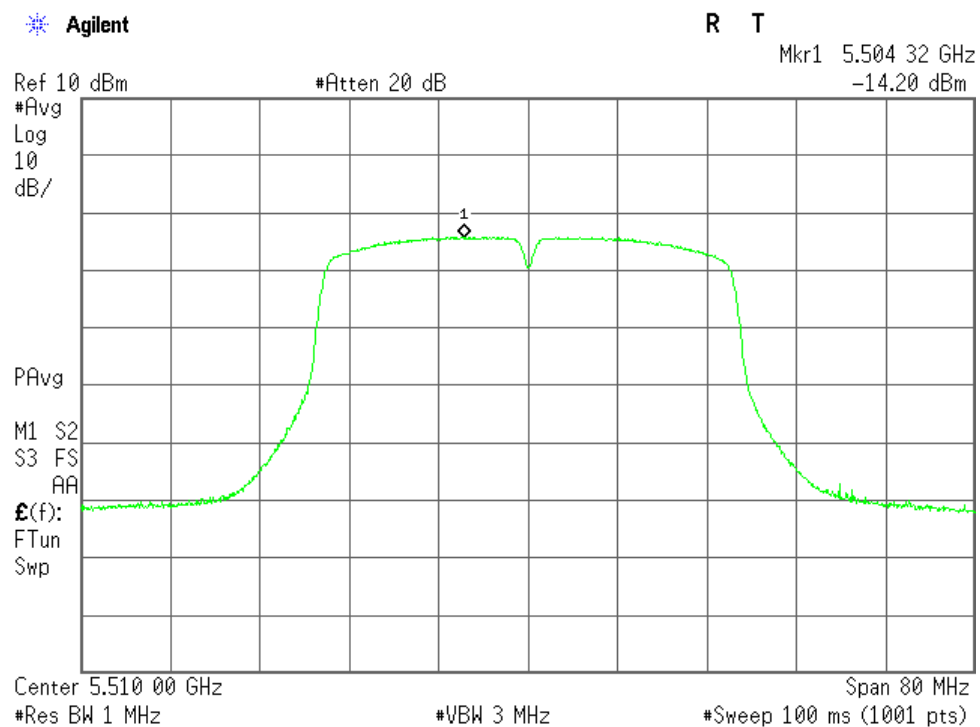


802.11n (40 MHz BW) 134ch (5670 MHz)

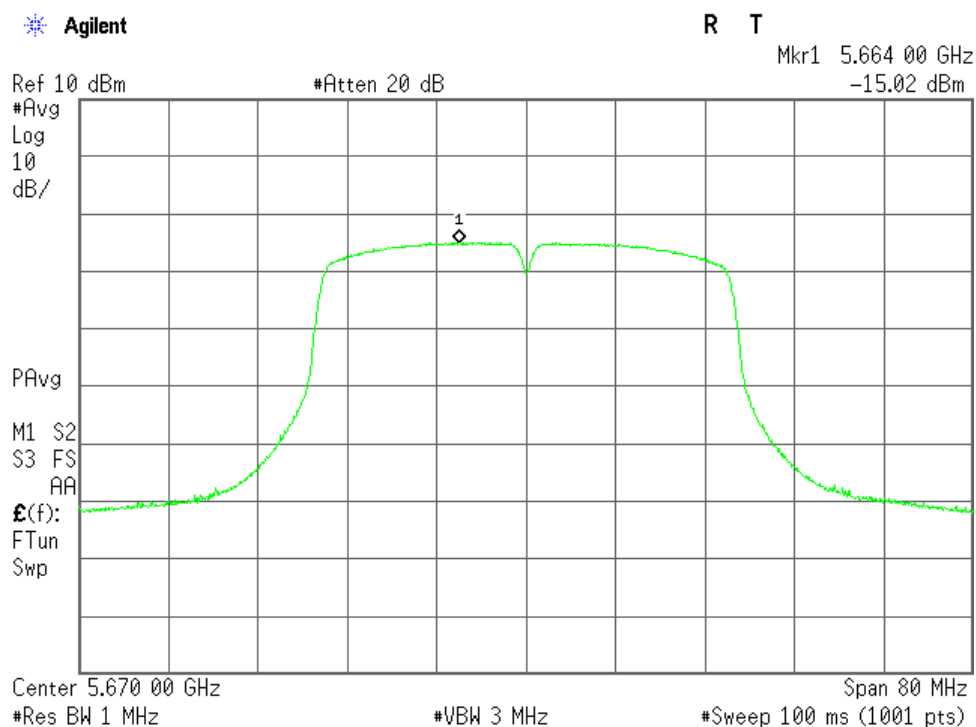


b) Antenna 2 (ANT1)


802.11n (40 MHz BW) 38ch (5190 MHz)

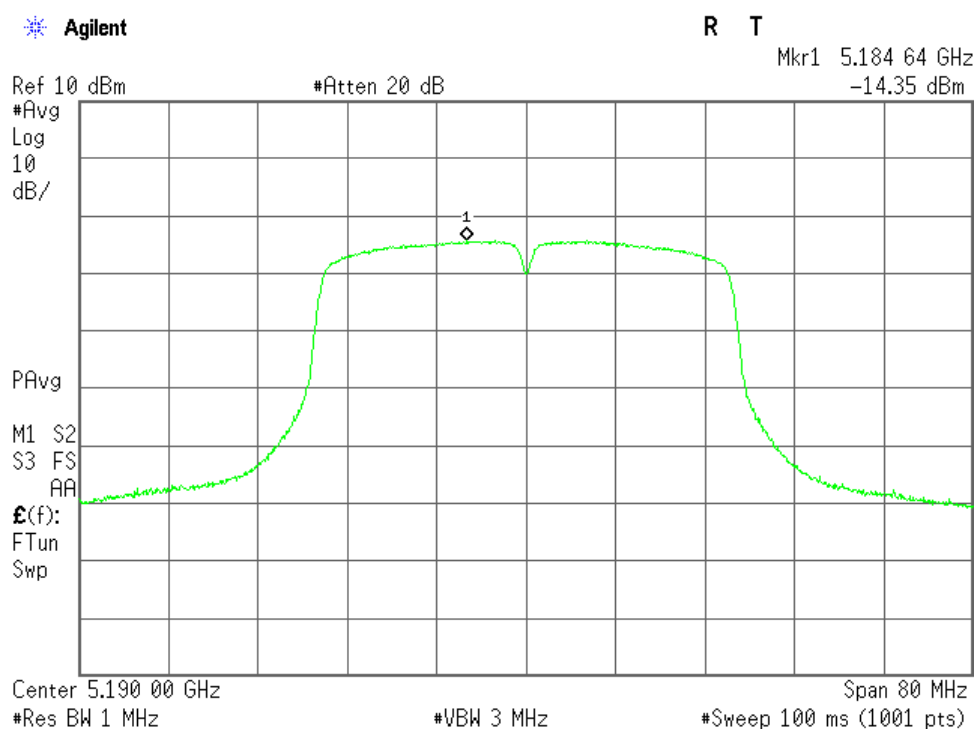


802.11n (40 MHz BW) 46ch (5230 MHz)

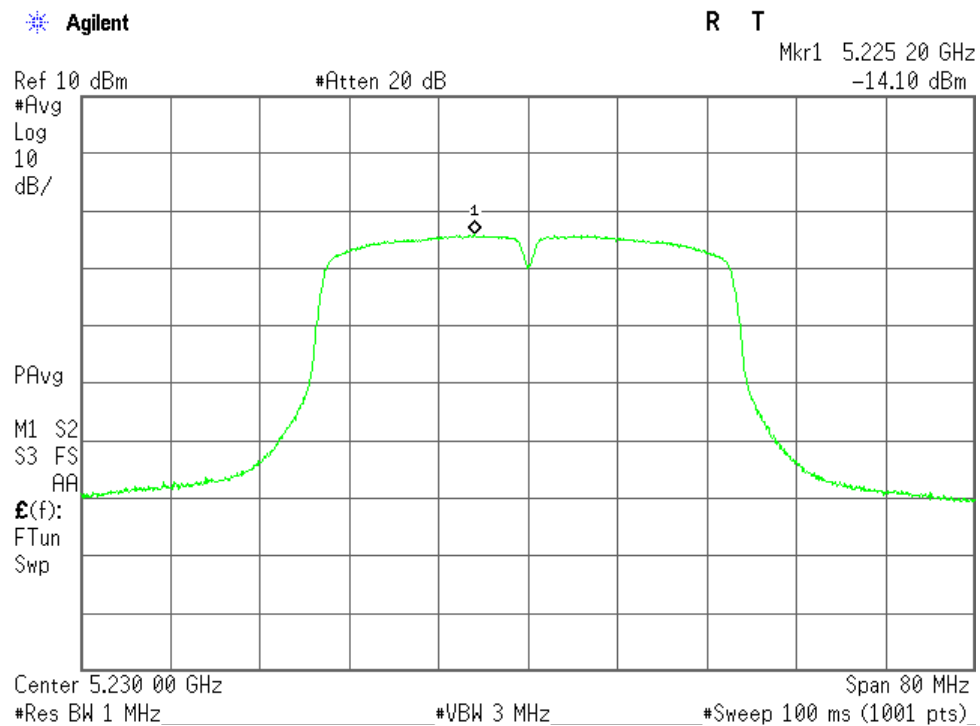


802.11n (40 MHz BW) 54ch (5270 MHz)

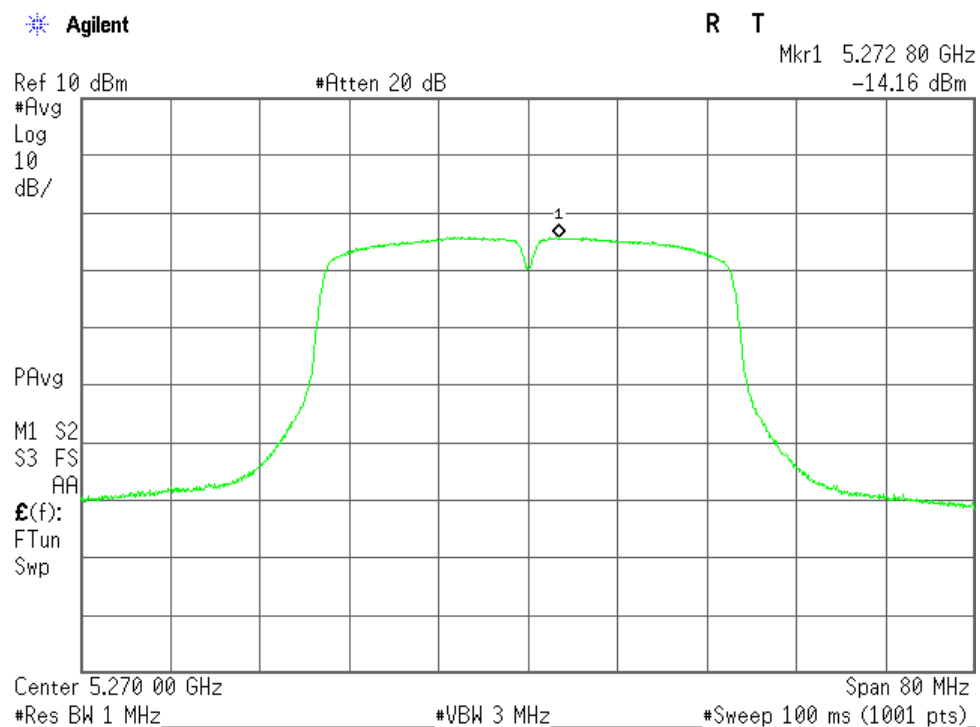


802.11n (40 MHz BW) 62ch (5310 MHz)

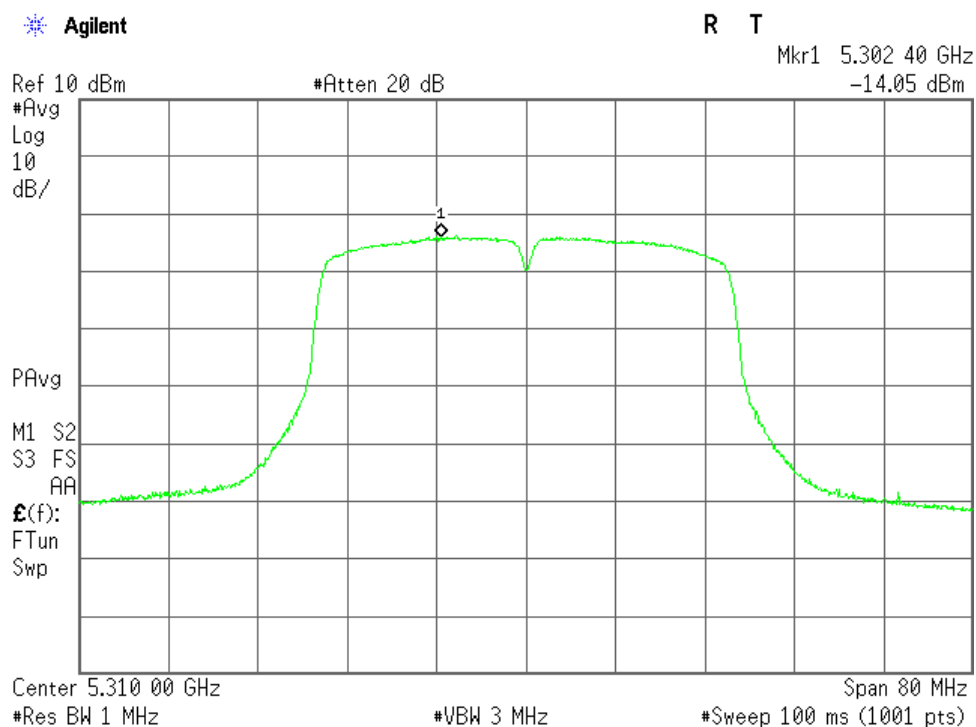

802.11n (40 MHz BW) 102ch (5510 MHz)

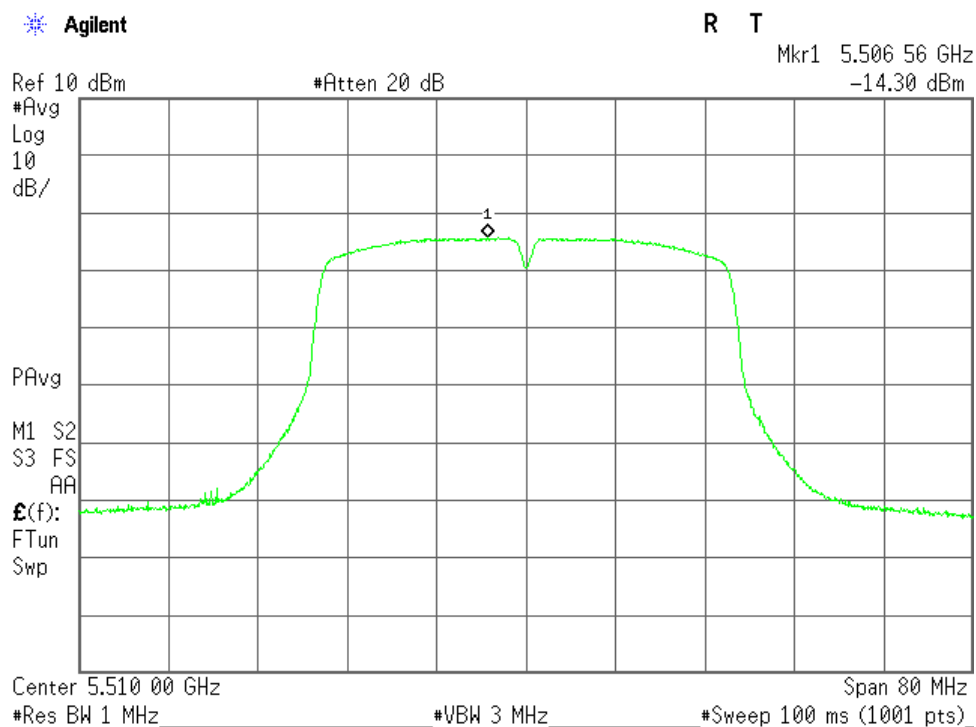

802.11n (40 MHz BW) 134ch (5670 MHz)

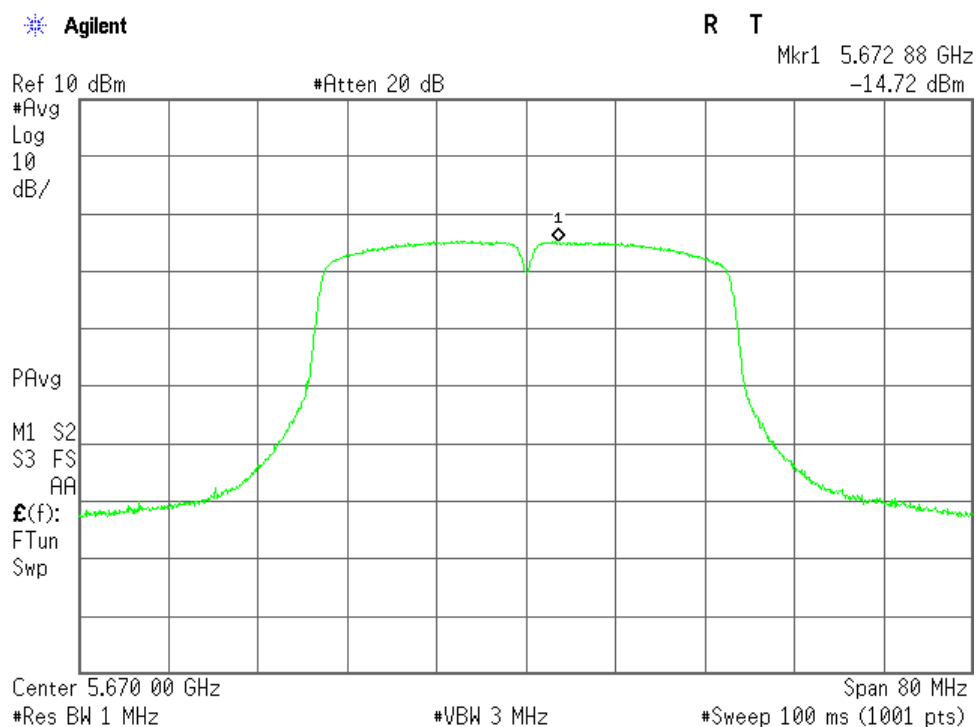

7.3.4.4 802.11ac (80 MHz BW) Peak power spectral density

Mode of EUT: Tx Mode (802.11ac: 80 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)			PPSD (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	Total			
42	5210	10.83	-17.43	-17.44	-14.43	-3.60	11.00	14.60
58	5290	10.82	-17.11	-17.44	-14.26	-3.44	11.00	14.44
106	5530	10.84	-17.13	-17.77	-14.43	-3.59	11.00	14.59
122	5610	10.83	-17.69	-17.87	-14.77	-3.94	11.00	14.94

The test results (PPSD) is calculated as follows:


For 38 channel (5210 MHz)

$$\text{PPSD} = \text{Correction Factor} + \text{Meter Reading} = 10.83 + (-14.43) = -3.60 \text{ dBm}$$


Correction Factor = cable loss + 10 dB attenuator

a) Antenna 1 (ANT0)


802.11ac (80 MHz BW) 42ch (5210 MHz)

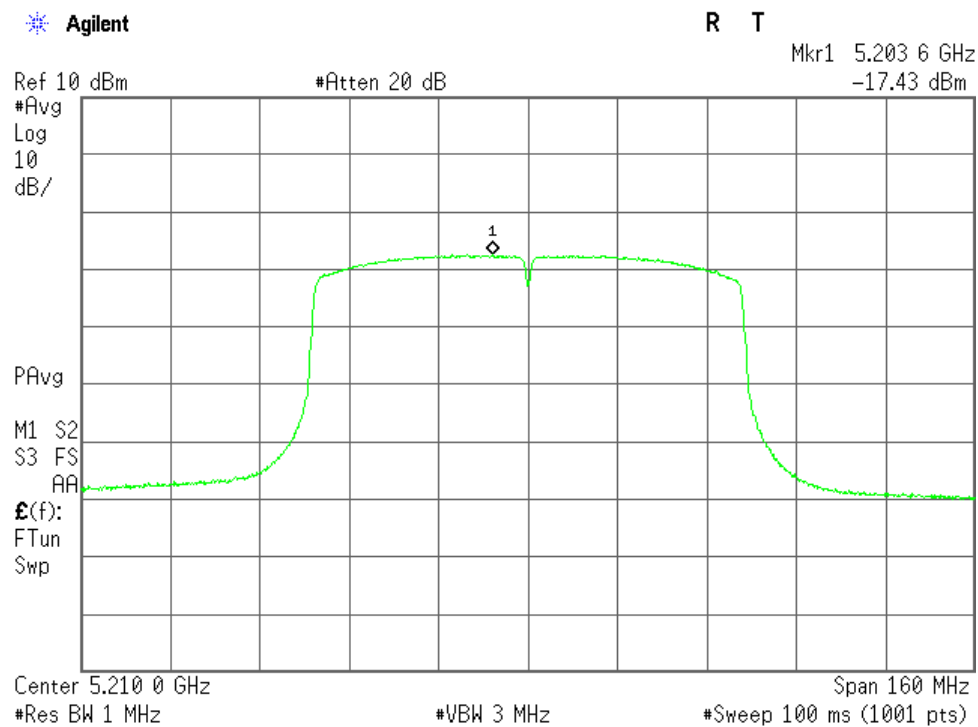


802.11ac (80 MHz BW) 58ch (5290 MHz)

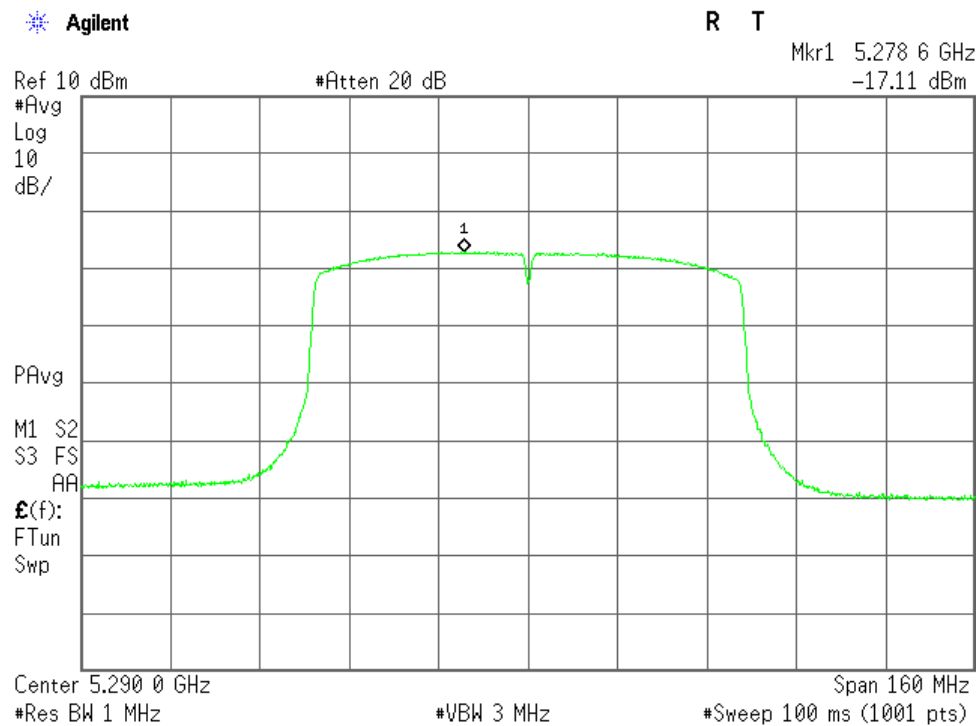

802.11ac (80 MHz BW) 106ch (5530 MHz)

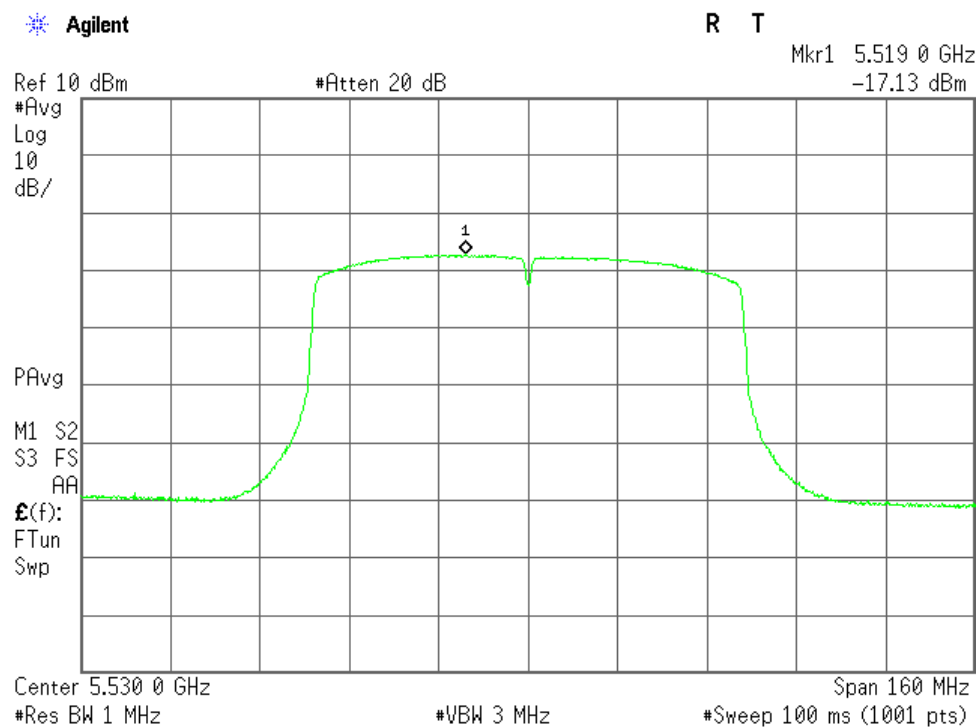


802.11ac (80 MHz BW) 122ch (5610 MHz)

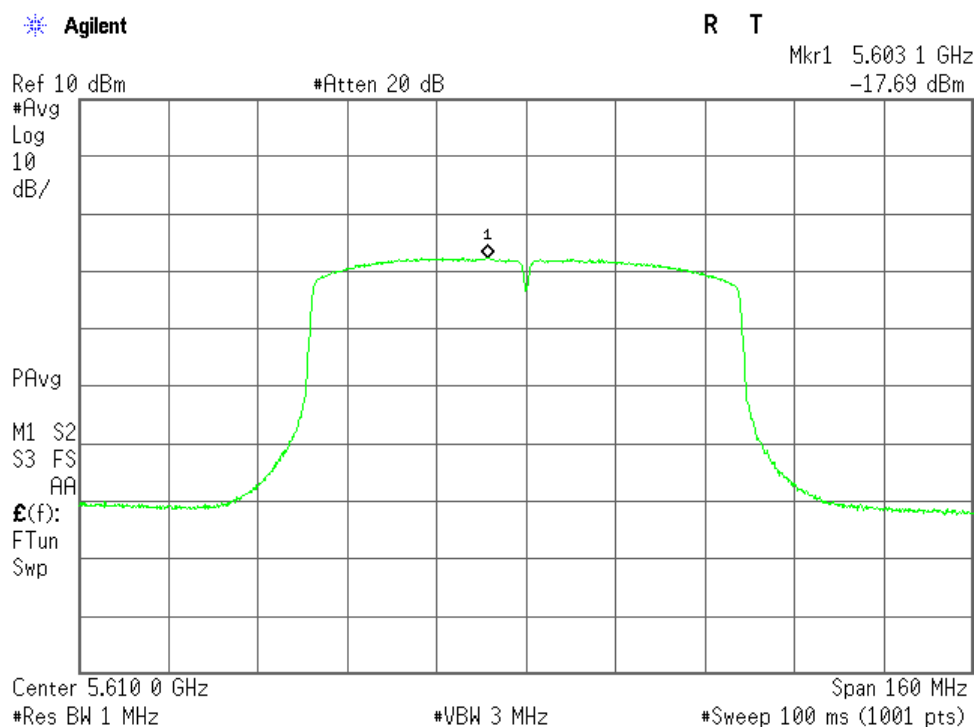


b) Antenna 2 (ANT1)


802.11ac (80 MHz BW) 42ch (5210 MHz)

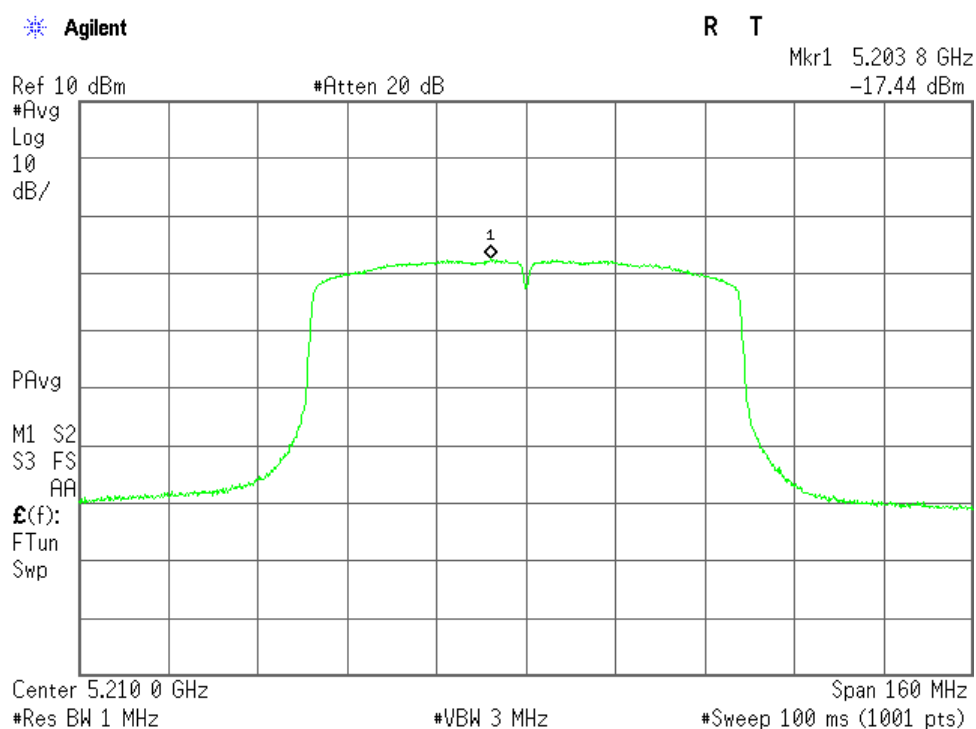


802.11ac (80 MHz BW) 58ch (5290 MHz)

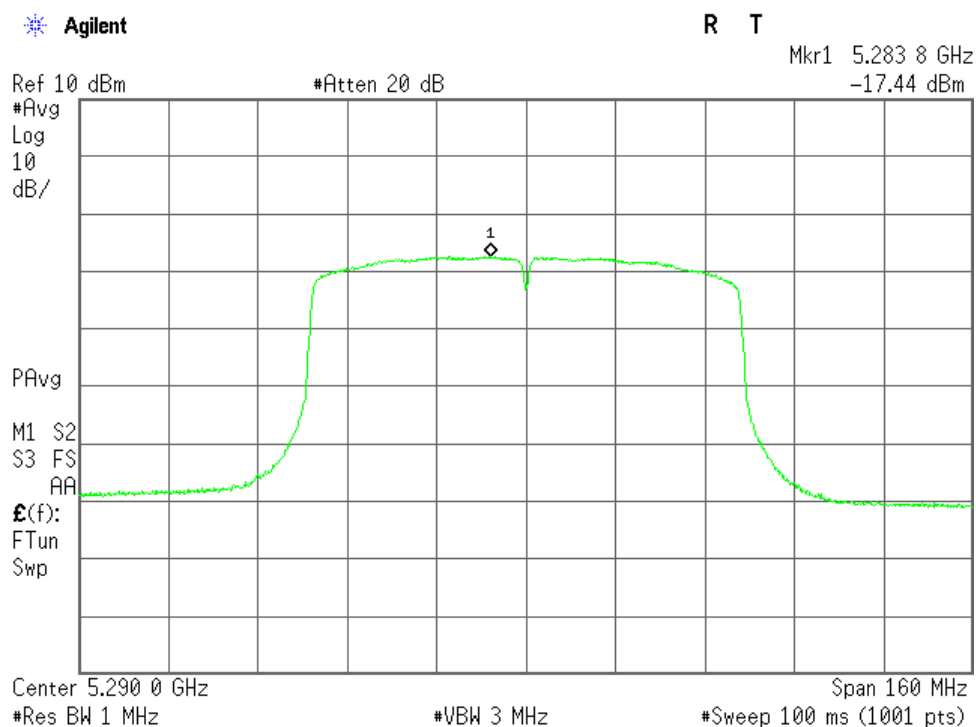

802.11ac (80 MHz BW) 106ch (5530 MHz)

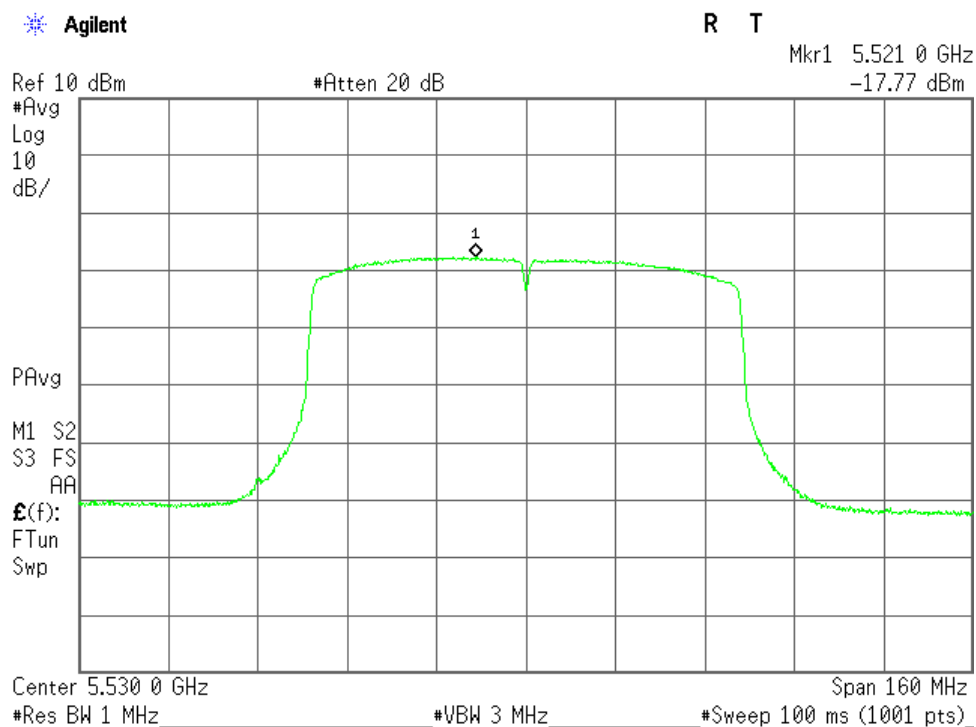

802.11ac (80 MHz BW) 122ch (5610 MHz)

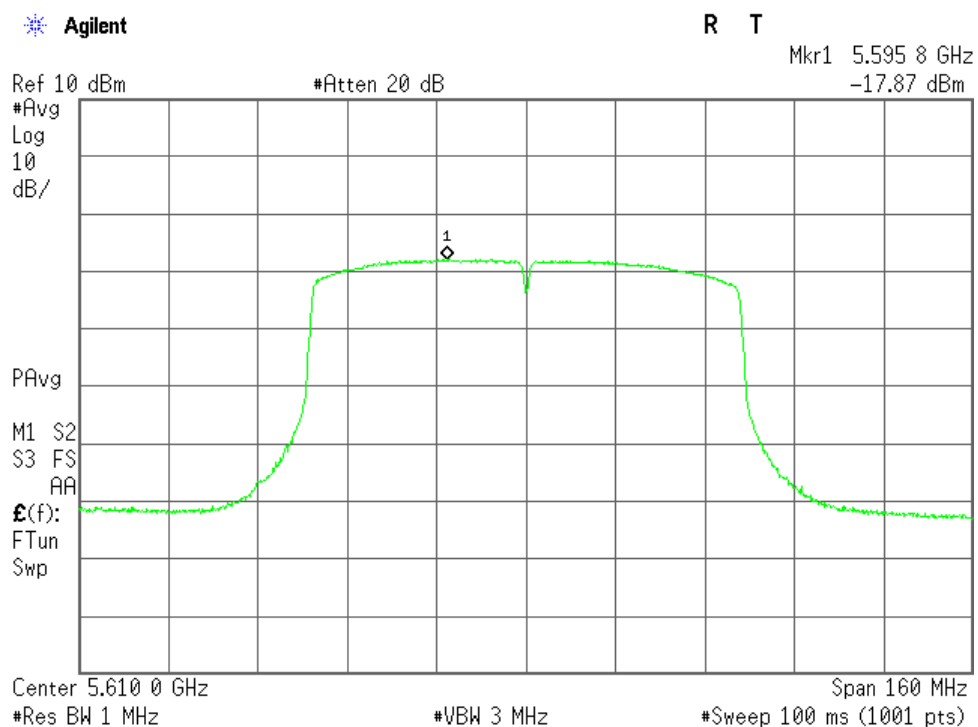

7.4 Peak Excursion

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.5 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.5.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Average) 7.8 dB at 0.56 MHz

Uncertainty of Measurement Results +/-2.6 dB(2 σ)

Remarks : _____

7.5.2 Test Instruments

Measurement Room M2					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
AMN (main)	KNW-407FR	Kyoritsu	D-103	2014/10	1 Year
RF Cable	RG223/U	SUHNER	H-34	2014/6	1 Year


7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

(Reference divisional instruction No. G703649)

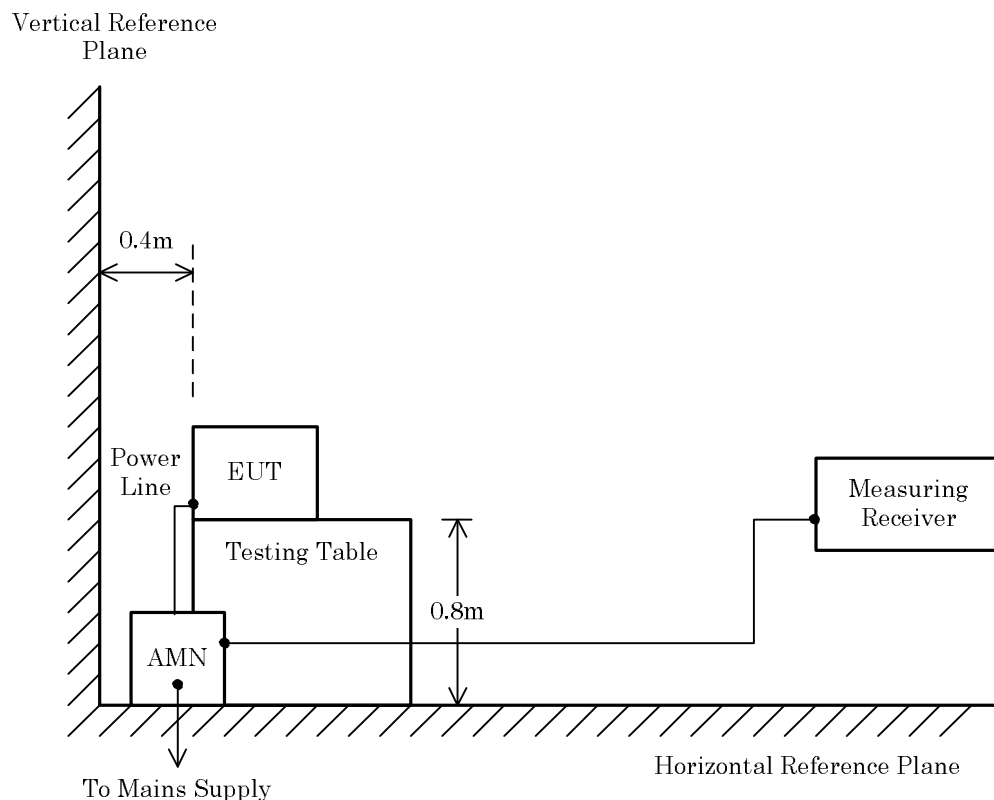

NOTE

AMN : Artificial Mains Network

7.5.4 Test Data

Mode of EUT : All modes have been investigated and the worst case mode for channel (36ch: 5180MHz / IEEE 802.11a) has been listed.


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.160	10.3	38.3	--	65.5	55.5	48.6	--	+16.9	--	-
0.220	10.2	34.2	--	62.8	52.8	44.4	--	+18.4	--	-
0.320	10.2	32.7	--	59.7	49.7	42.9	--	+16.8	--	-
0.560	10.2	36.3	28.0	56.0	46.0	46.5	38.2	+ 9.5	+ 7.8	-
1.470	10.3	25.3	--	56.0	46.0	35.6	--	+20.4	--	-
2.280	10.4	29.8	--	56.0	46.0	40.2	--	+15.8	--	-
3.450	10.4	28.7	--	56.0	46.0	39.1	--	+16.9	--	-
20.120	11.2	24.8	--	60.0	50.0	36.0	--	+24.0	--	-
22.130	11.2	24.6	--	60.0	50.0	35.8	--	+24.2	--	-
24.140	11.3	28.9	--	60.0	50.0	40.2	--	+19.8	--	-

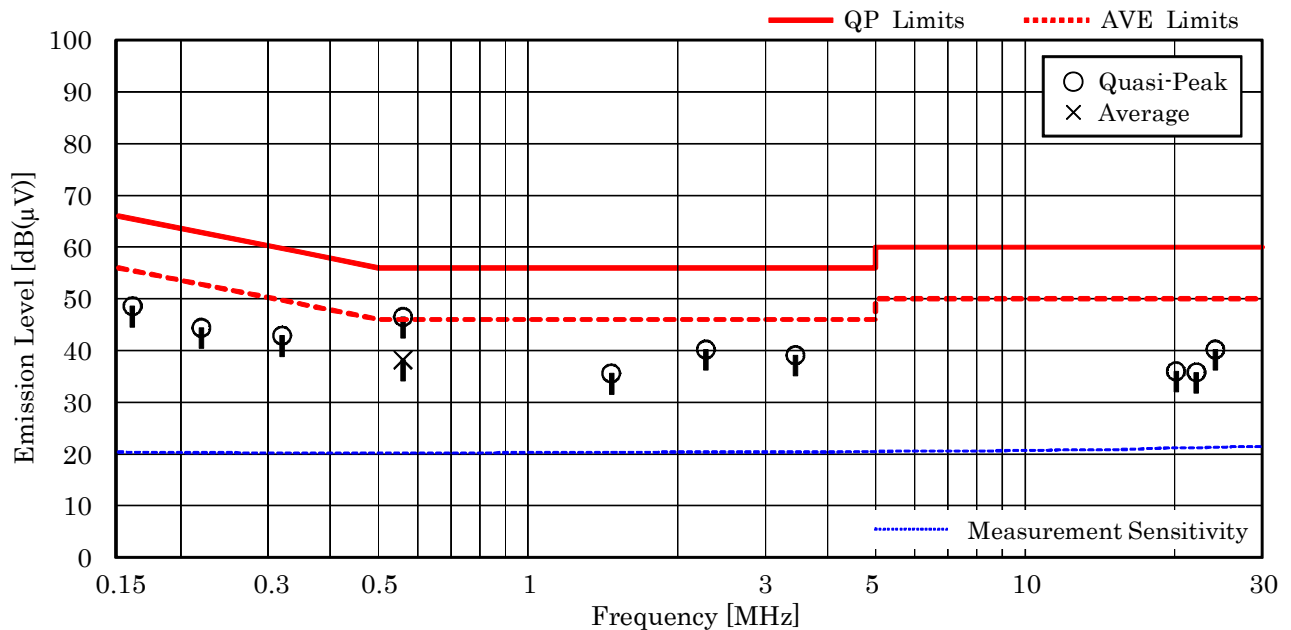

NOTES

- The spectrum was checked from 0.15 MHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 0.560 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (AVE) = 10.2 + 28.0 = 38.2 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
<u>0.160</u>	10.3	41.4	--	65.5	55.5	51.7	--	+13.8	--	-
0.220	10.2	37.8	--	62.8	52.8	48.0	--	+14.8	--	-
0.320	10.2	32.7	--	59.7	49.7	42.9	--	+16.8	--	-
0.560	10.2	28.4	--	56.0	46.0	38.6	--	+17.4	--	-
2.280	10.4	20.0	--	56.0	46.0	30.4	--	+25.6	--	-
3.450	10.4	25.4	--	56.0	46.0	35.8	--	+20.2	--	-
20.120	11.3	23.5	--	60.0	50.0	34.8	--	+25.2	--	-
22.130	11.4	23.6	--	60.0	50.0	35.0	--	+25.0	--	-
24.140	11.5	27.2	--	60.0	50.0	38.7	--	+21.3	--	-
28.160	11.6	23.0	--	60.0	50.0	34.6	--	+25.4	--	-

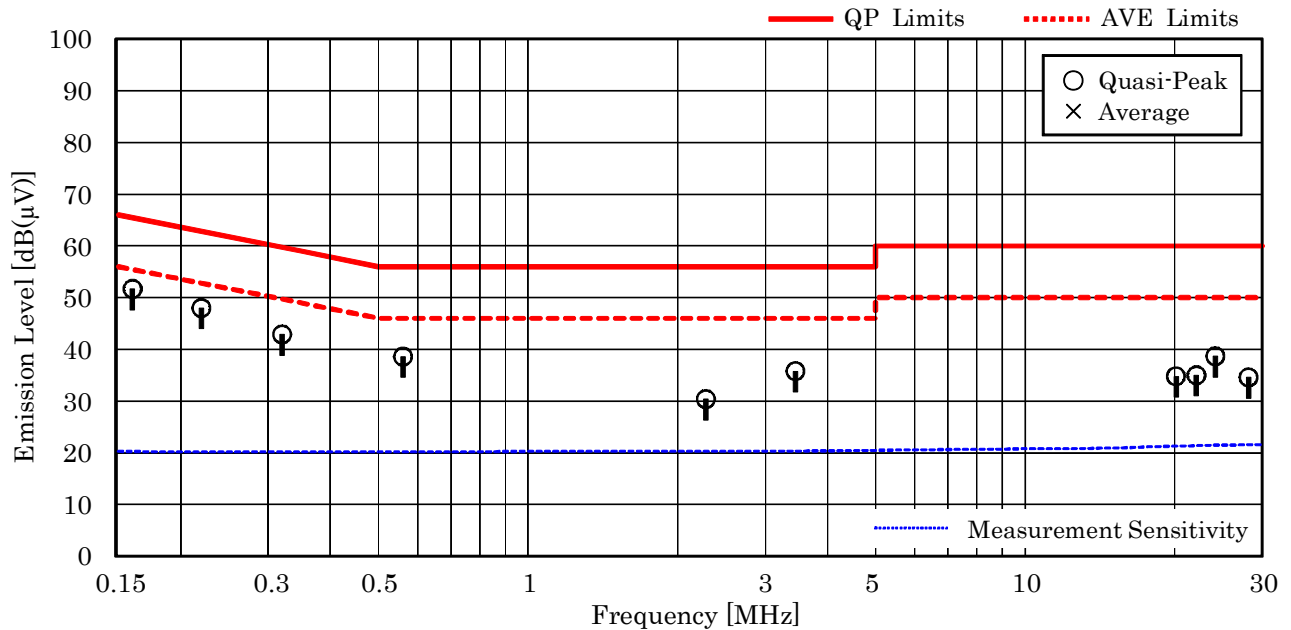

NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.160 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.3 + 41.4 = 51.7 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

7.6 Unwanted Radiated Emission

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.6.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Average)	<u>4.0</u> dB	at	<u>5142.4</u> MHz
Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-3.0</u>	dB(2σ)
	30 MHz – 300 MHz	<u>+/-3.8</u>	dB(2σ)
	300 MHz – 1000 MHz	<u>+/-4.8</u>	dB(2σ)
	1 GHz – 6 GHz	<u>+/-4.7</u>	dB(2σ)
	6 GHz – 18 GHz	<u>+/-4.6</u>	dB(2σ)
	18 GHz – 40 GHz	<u>+/-5.5</u>	dB(2σ)
Test Distance	9 kHz – 26.5 GHz	<u>3</u>	m
Test Distance	26.5 GHz – 40 GHz	<u>1</u>	m

Remarks : The measurement result is within the range of measurement uncertainty. Worst case is 802.11ac(80 MHz BW) channel 42. Z axis position.

7.6.2 Test Instruments

Anechoic Chamber A2					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2014/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2014/8	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2014/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2014/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2014/4	1 Year
Site Attenuation	--	----	H-15	2015/1	1 Year
Pre-Amplifier	TPA0118-36	TOYO	A-37	2014/5	1 Year
Pre-Amplifier	RP1826G-45H	EMCS	A-53	2014/7	1 Year
Pre-Amplifier	RP2640G-ERZ	EMCS	A-54	2014/7	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2014/7	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2014/7	1 Year
Horn Antenna	3160-04	EMCO	C-55	2014/6	1 Year
Horn Antenna	3160-05	EMCO	C-56	2014/6	1 Year
Horn Antenna	3160-06	EMCO	C-57	2014/6	1 Year
Horn Antenna	3160-07	EMCO	C-58	2014/6	1 Year
Horn Antenna	3160-08	EMCO	C-59	2014/6	1 Year
Horn Antenna	3160-09	EMCO	C-48	2014/7	1 Year
Horn Antenna	3160-10	EMCO	C-49	2014/7	1 Year
Attenuator	54A-10	Weinschel	D-29	2014/9	1 Year
Attenuator	2-10	Weinschel	D-79	2014/11	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2015/1	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2015/1	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2015/2	1 Year
SVSWR	--	----	H-19	2015/2	1 Year
Band Rejection Filter	BRM50716	MICRO-TRONICS	D-53	2015/6	1 Year
Pre-Amplifier	310N	SONOMA	A-17	2014/4	1 Year

7.6.3 Test Method and Test Setup (Diagrammatic illustration)


7.6.3.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

(Reference divisional instruction No. G70364B)

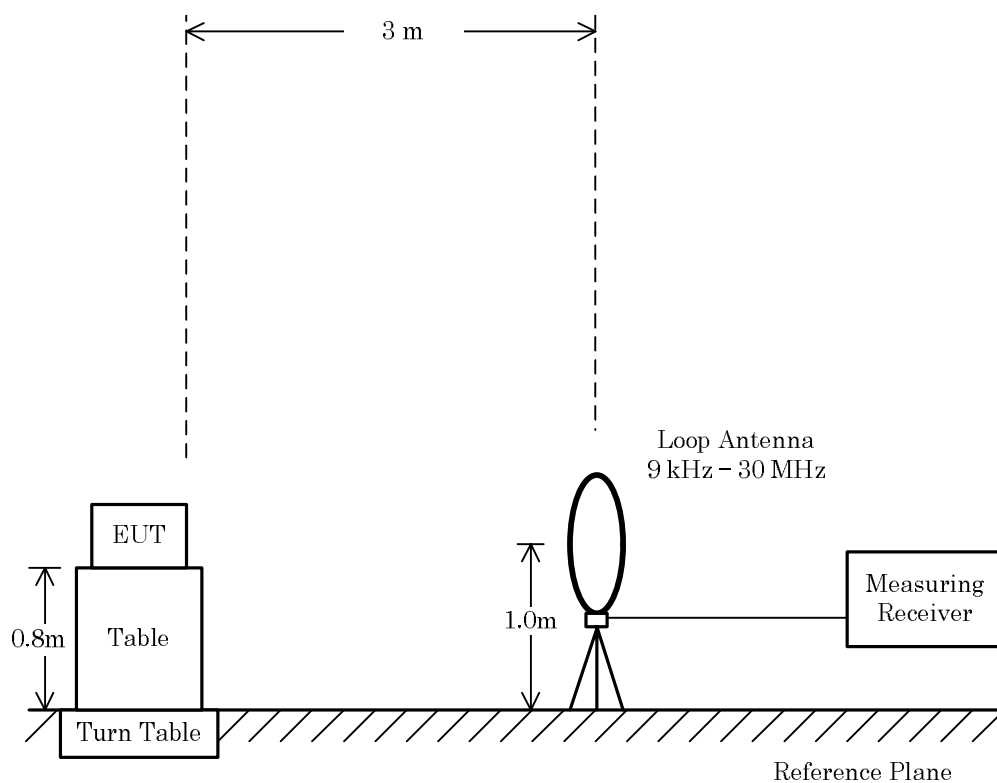


7.6.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

(Reference divisional instruction No. G70364B)

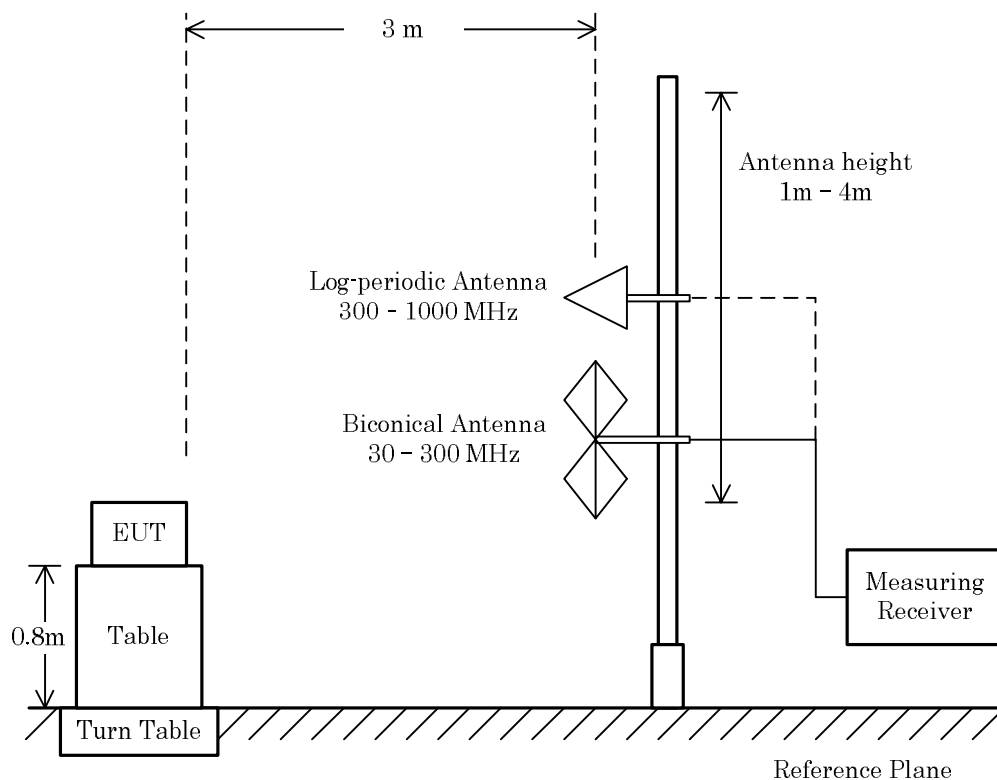

7.6.3.3 Radiated Emission Above 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.


The average unwanted emissions measurements were performed in accordance with KDB 789033 D02 Method VB described in G.6.d) in this document.

The setting of the measuring instruments are shown as follows:

Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T * 1)$
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

Note: 1. T: Minimum transmission duration

(Reference divisional instruction No. G70364C)

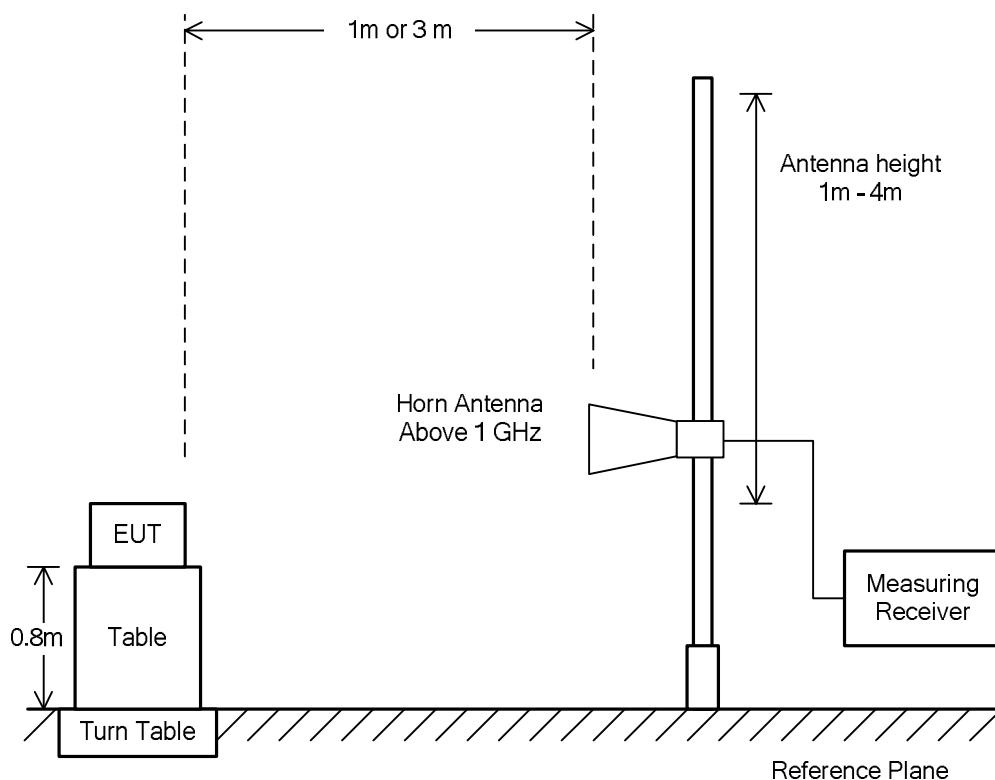

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

7.6.4 Test Data


7.6.4.1 Radiated Band Edge

Test Date : March 13, 2015

Temp.:22°C, Humi:32%

Mode of EUT : TX mode (802.11a, 36ch: 5180 MHz)


Antenna Polarization : Horizontal

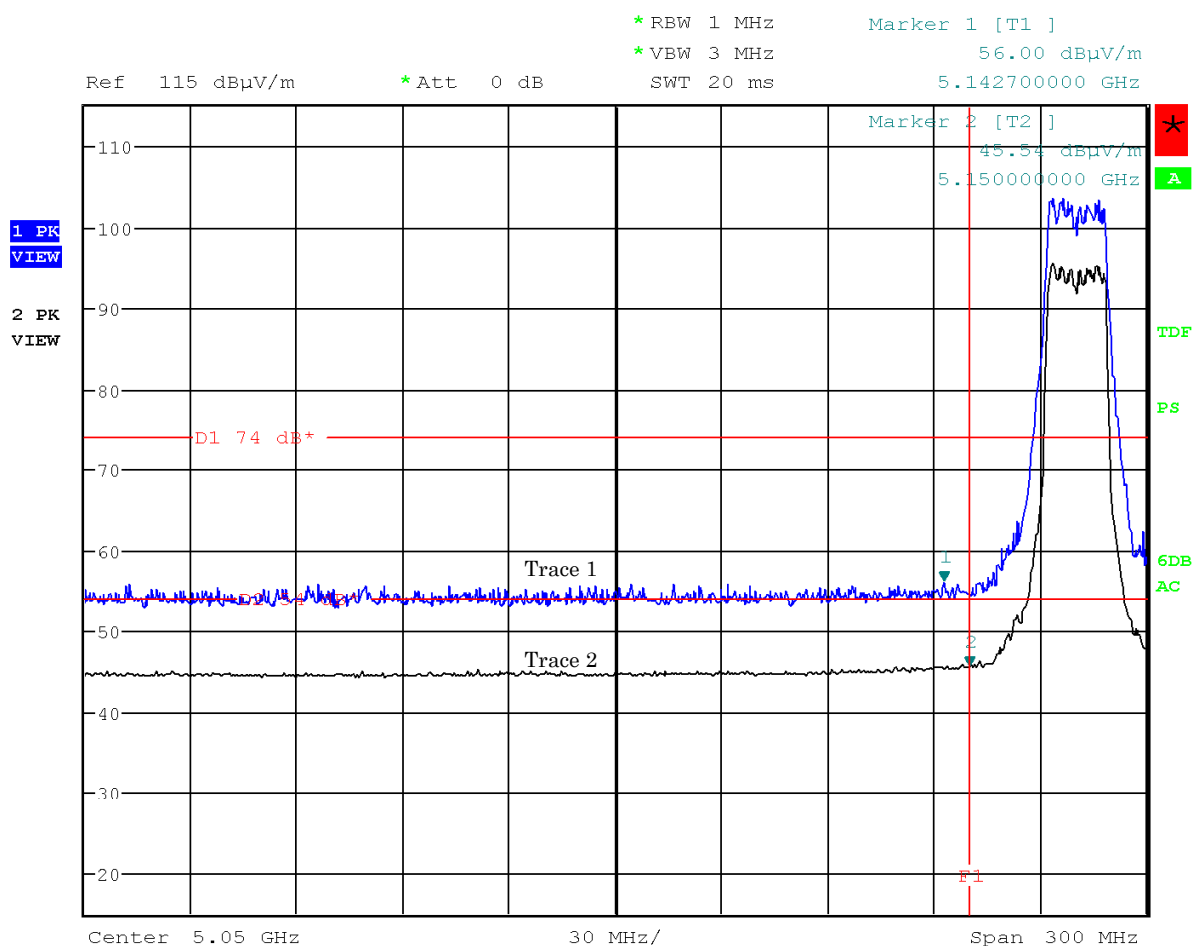

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 36ch: 5180 MHz)


Antenna Polarization : Vertical

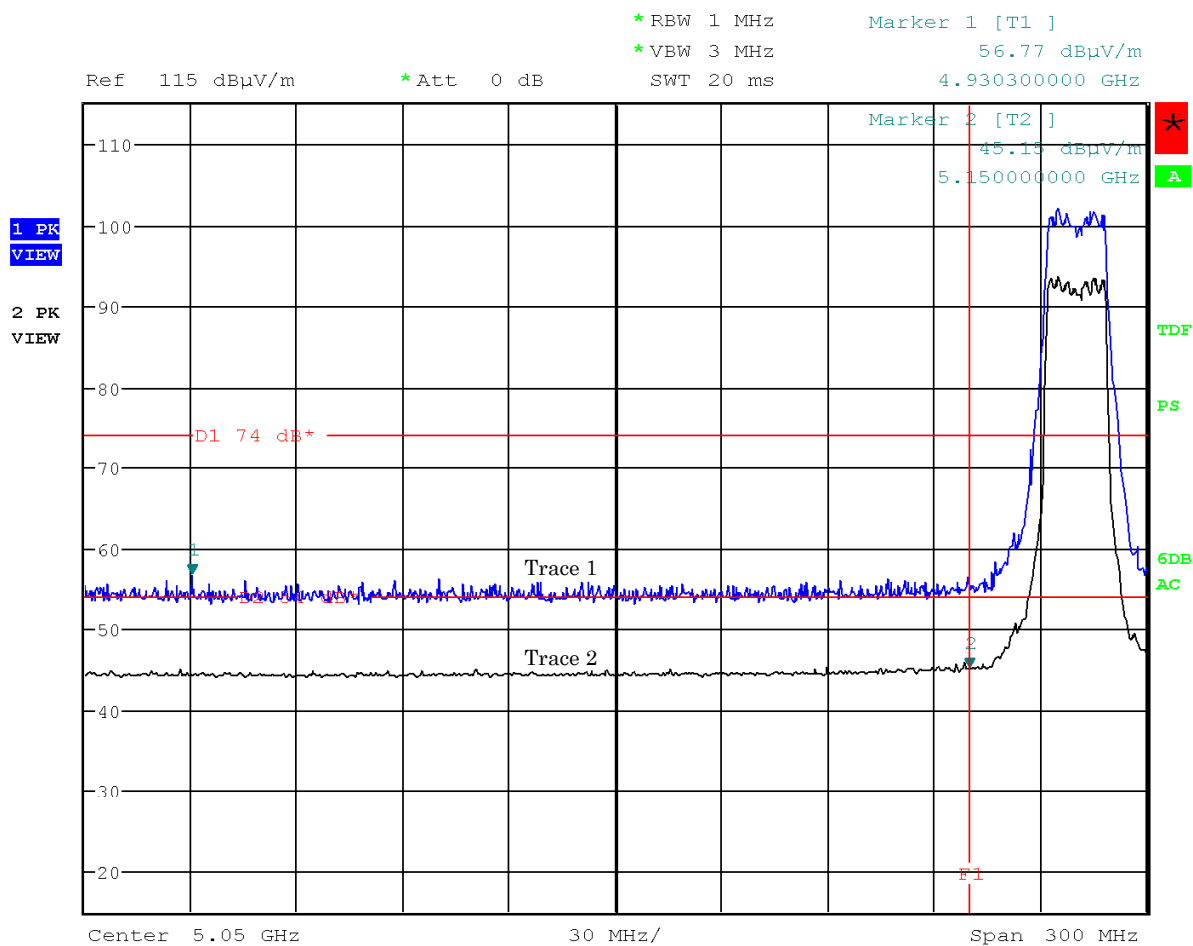

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 64ch: 5320 MHz)


Antenna Polarization : Horizontal

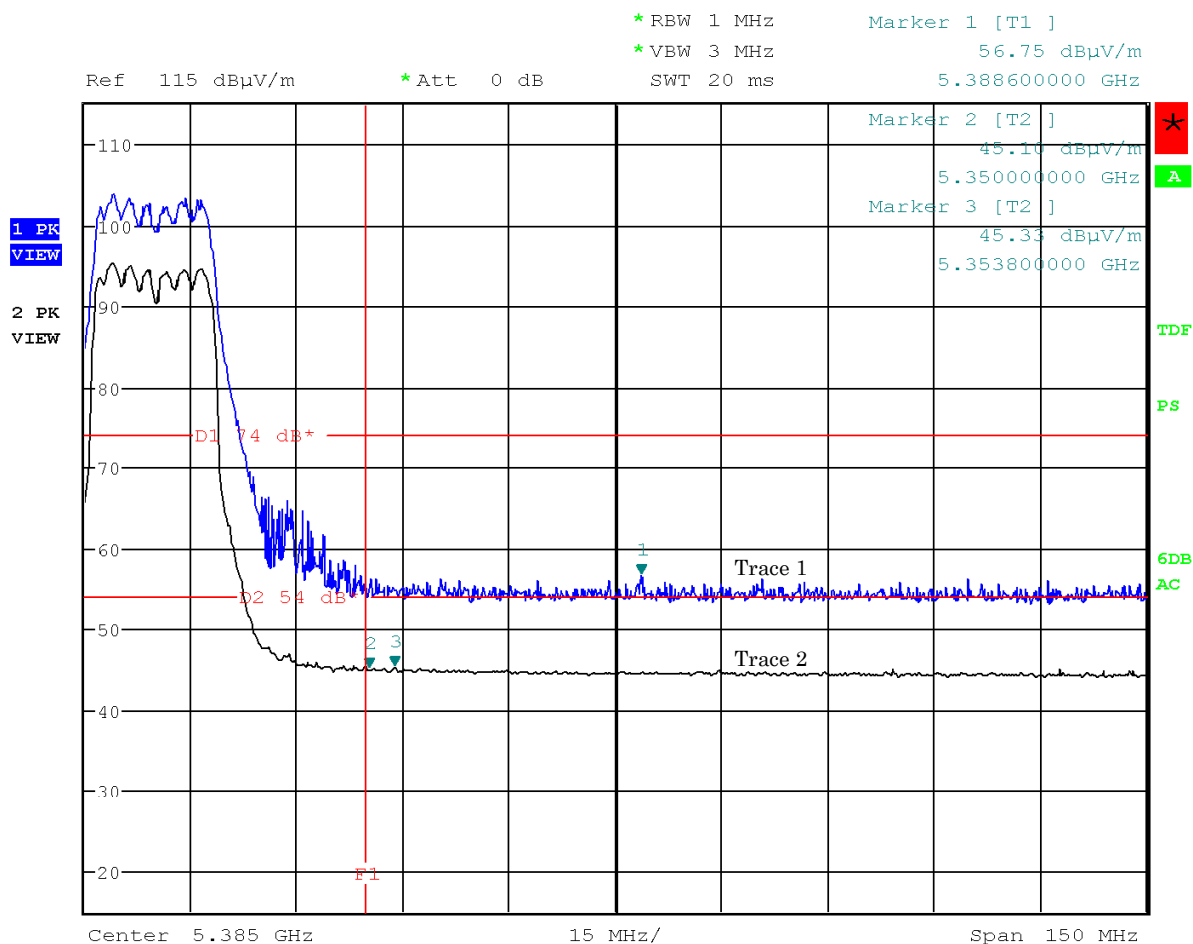

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 64ch: 5320 MHz)


Antenna Polarization : Vertical

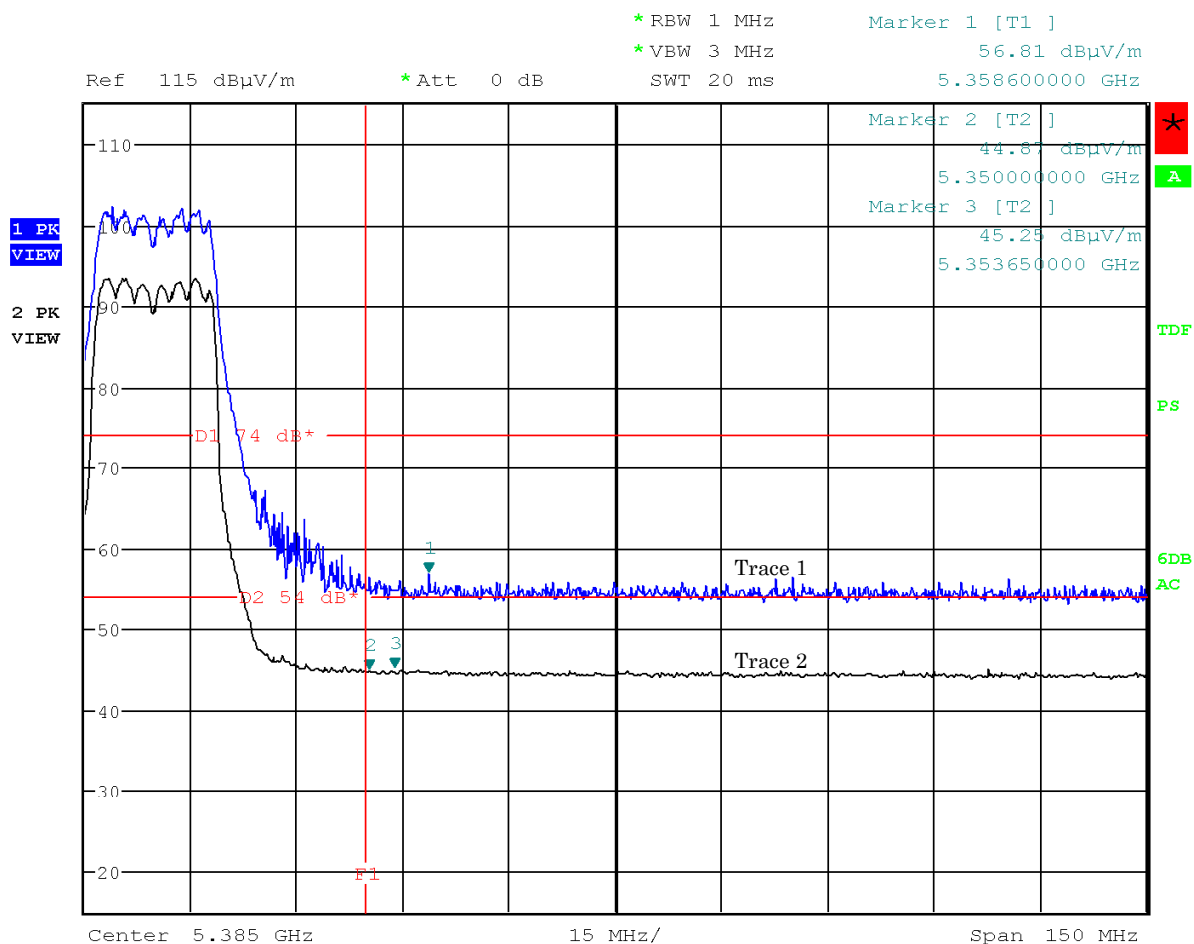

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 100ch: 5500 MHz)


Antenna Polarization : Horizontal

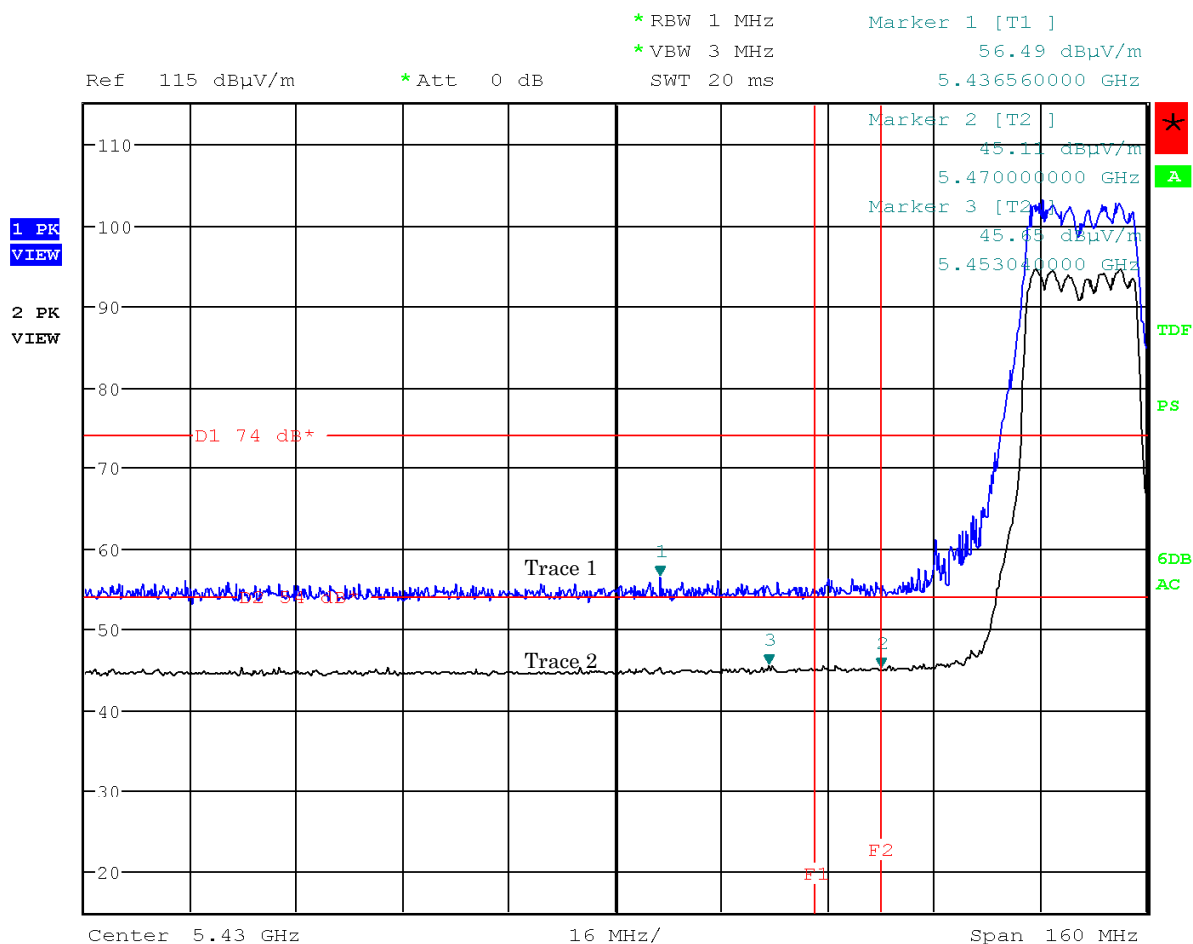

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 100ch: 5500 MHz)


Antenna Polarization : Vertical

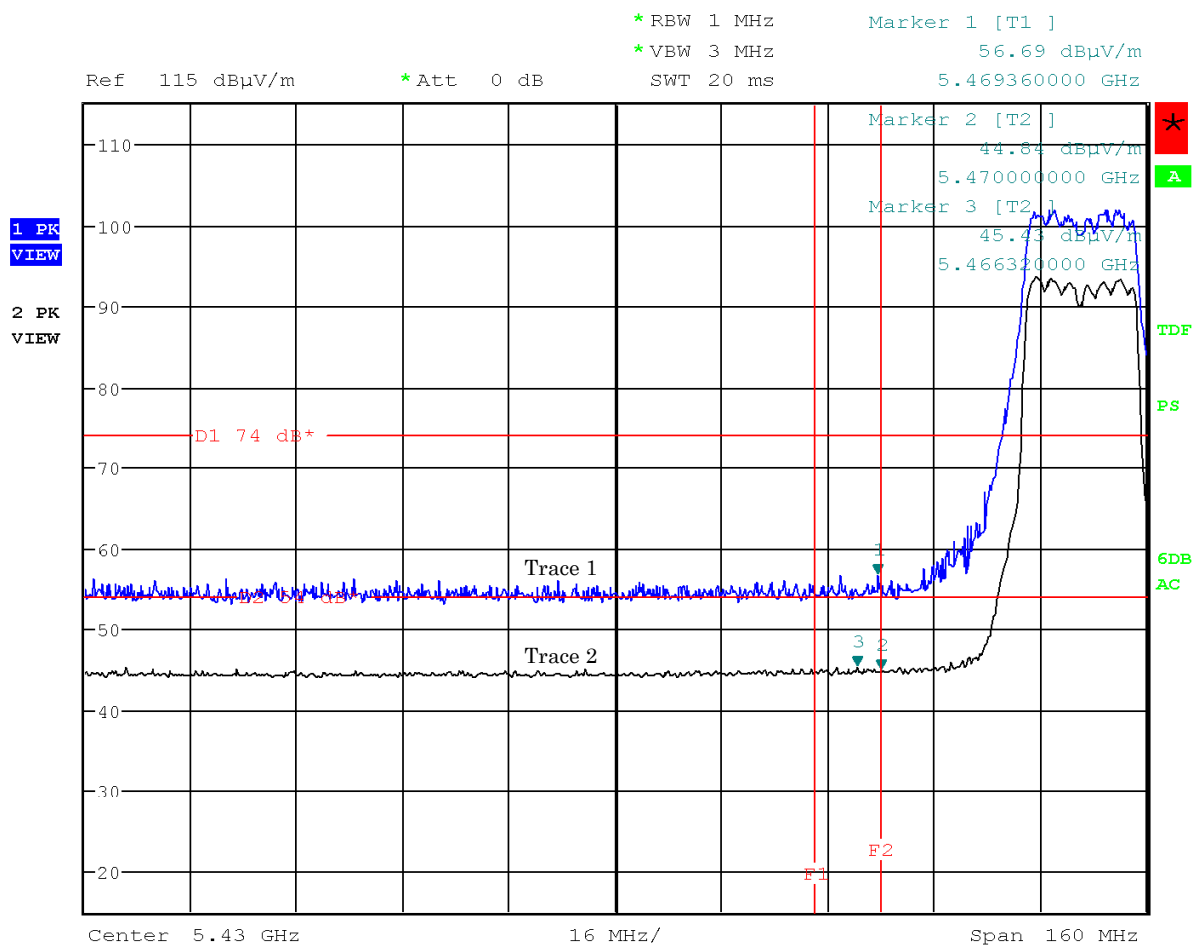

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 140ch: 5700 MHz)


Antenna Polarization : Horizontal

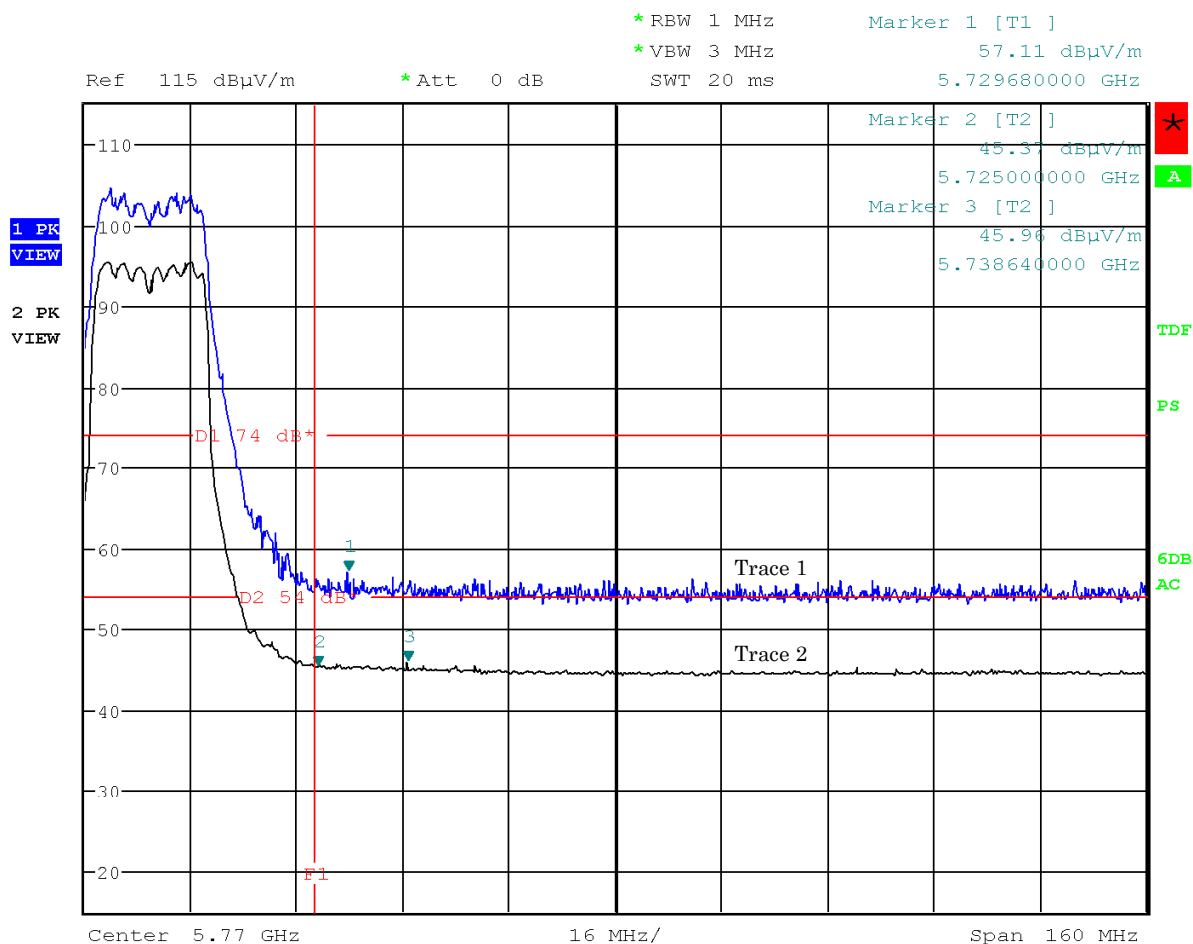

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11a, 140ch: 5700 MHz)


Antenna Polarization : Vertical

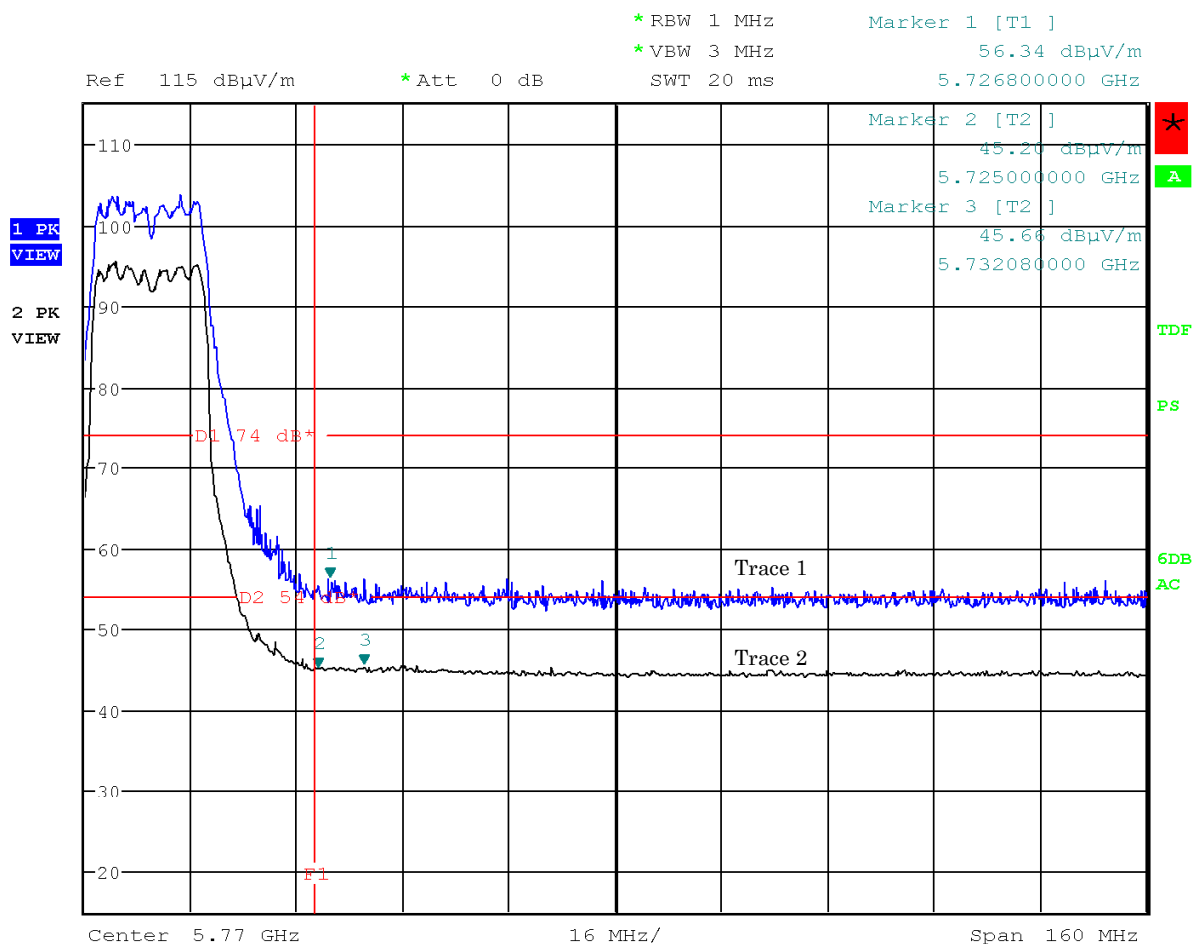

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 36ch: 5180 MHz)


Antenna Polarization : Horizontal

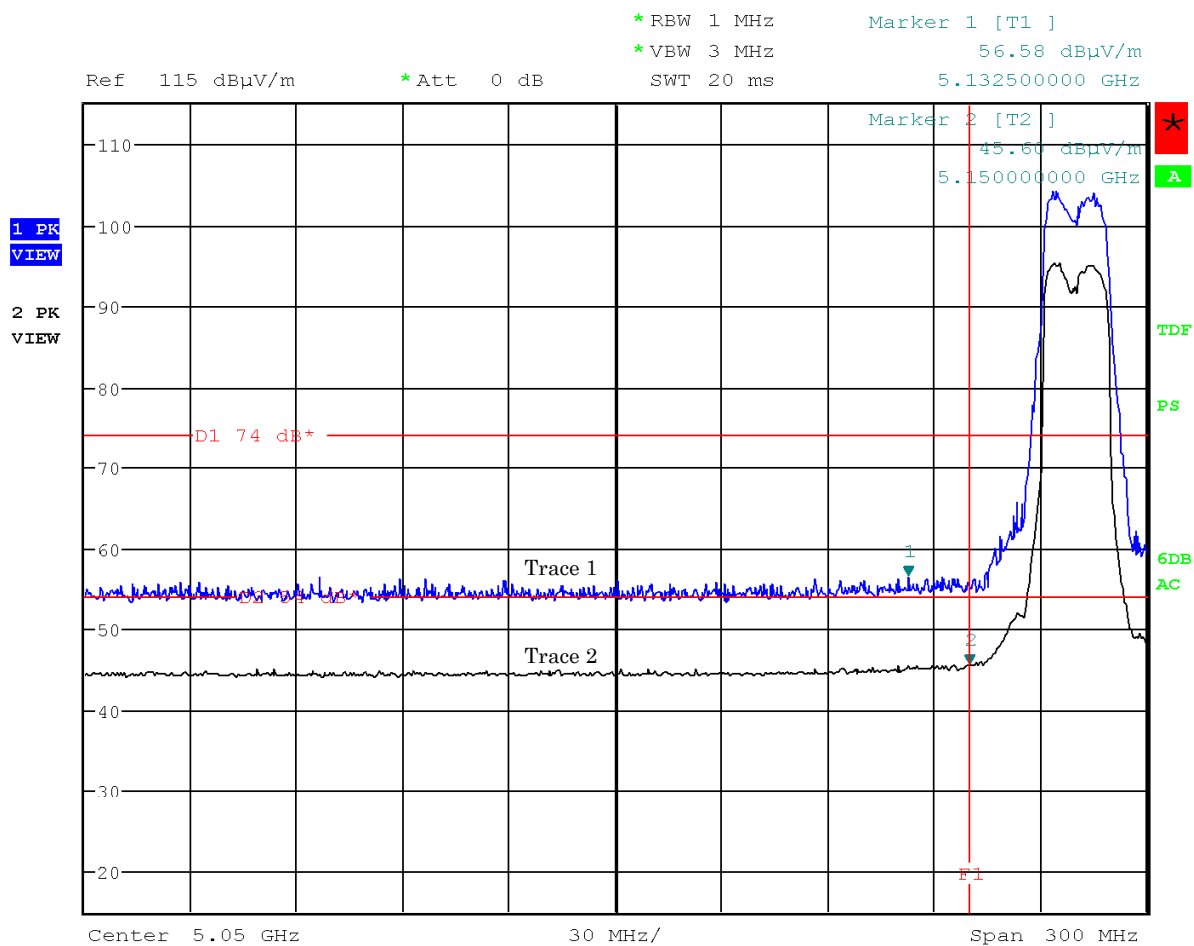

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 36ch: 5180 MHz)


Antenna Polarization : Vertical

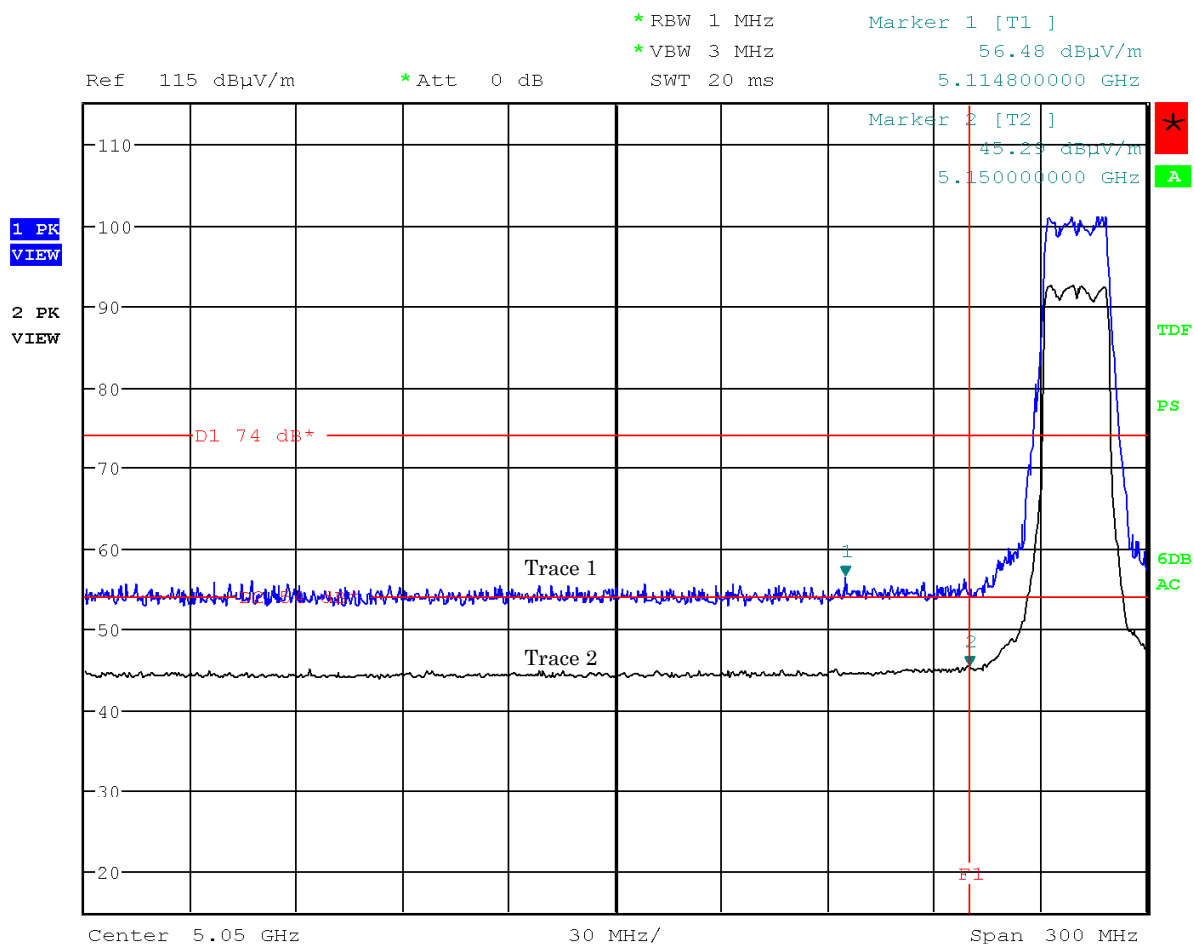

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 64ch: 5320 MHz)


Antenna Polarization : Horizontal

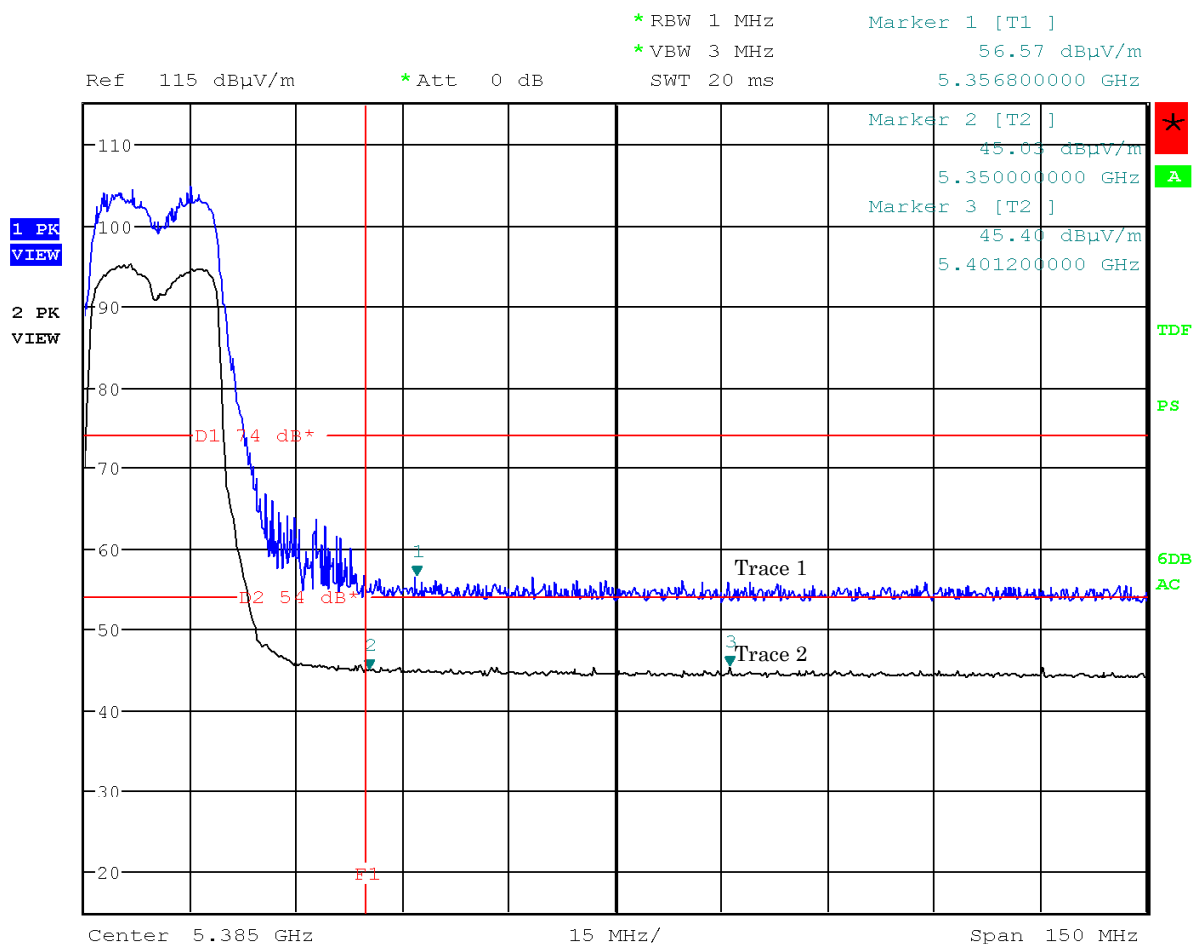

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 64ch: 5320 MHz)


Antenna Polarization : Vertical

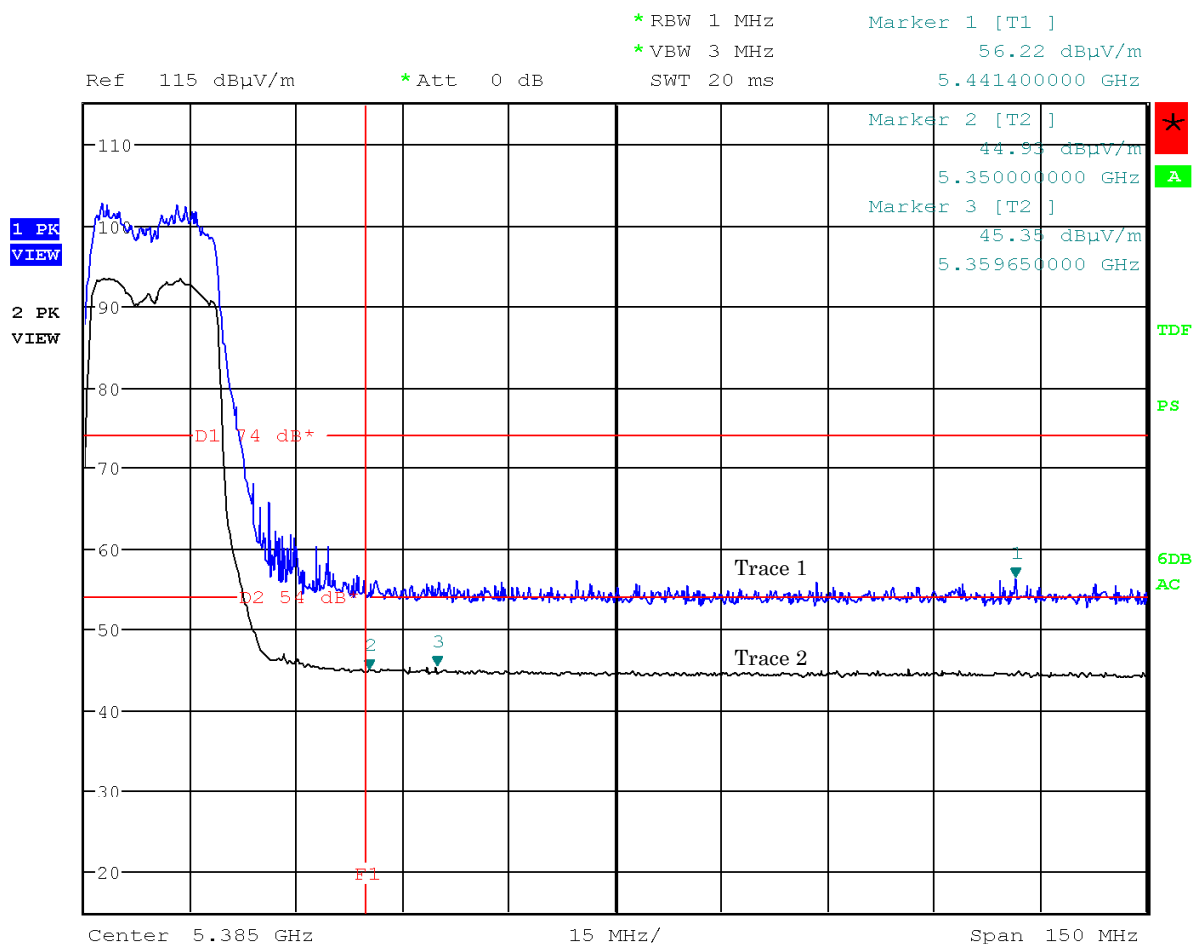

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 100ch: 5500 MHz)


Antenna Polarization : Horizontal

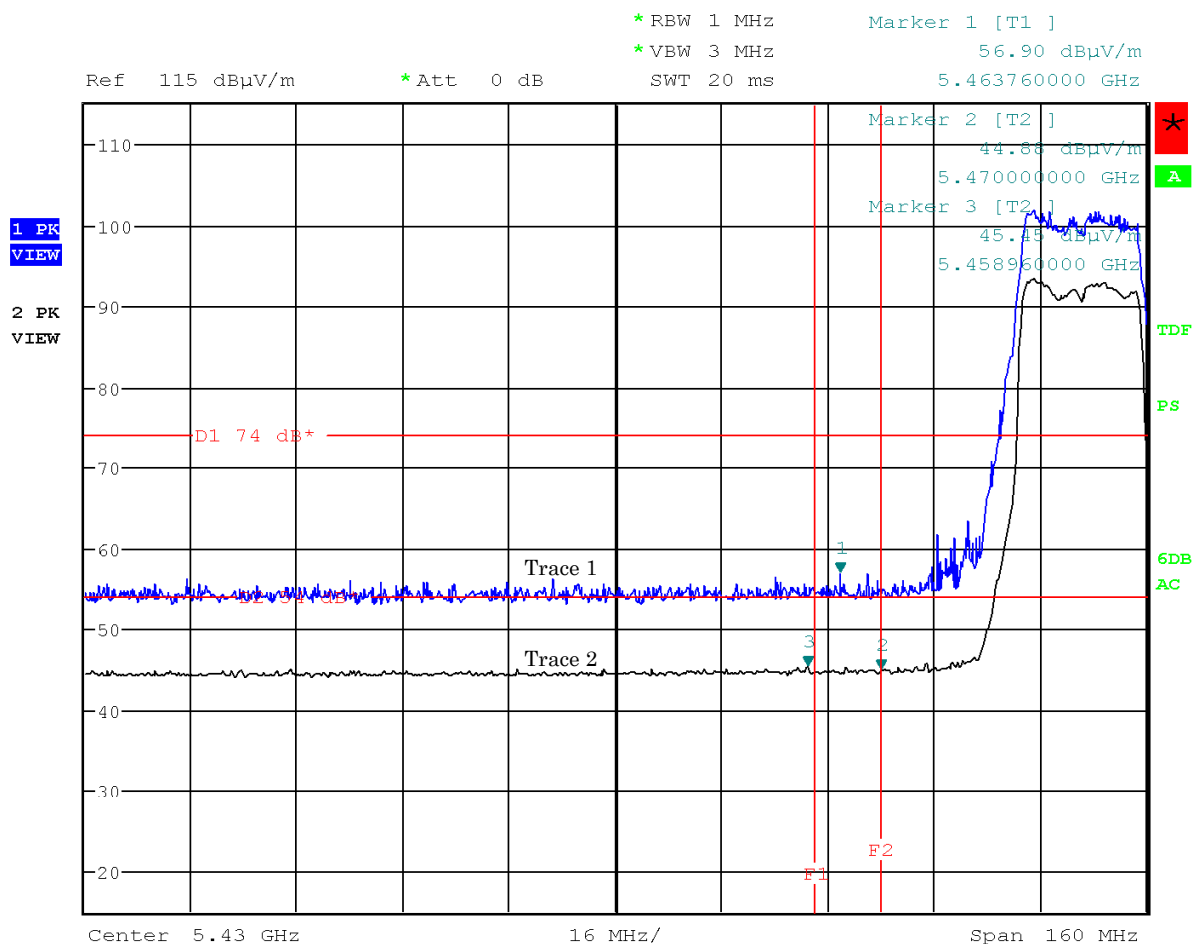

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 100ch: 5500 MHz)


Antenna Polarization : Vertical

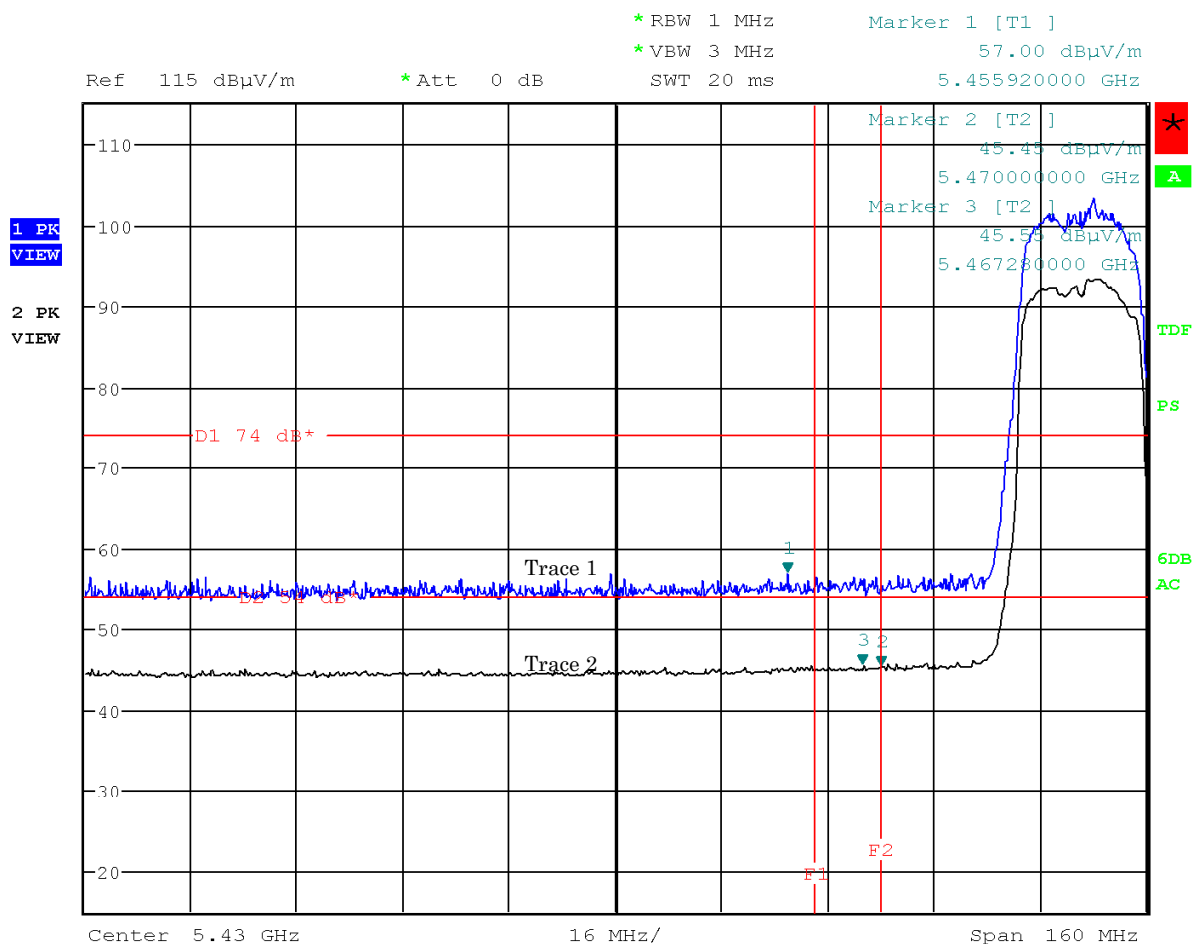

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 140ch: 5700 MHz)


Antenna Polarization : Horizontal

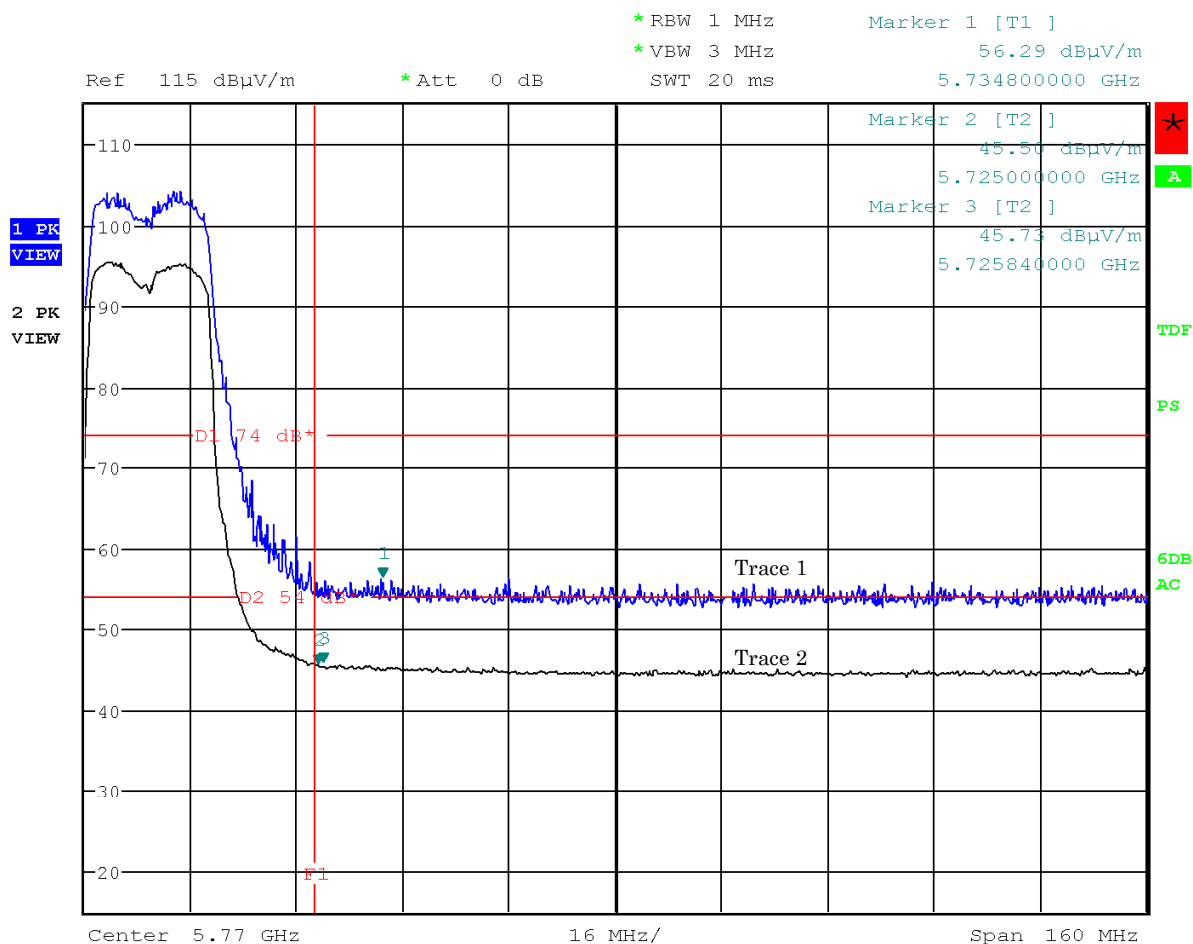

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 20 MHz BW, 140ch: 5700 MHz)


Antenna Polarization : Vertical

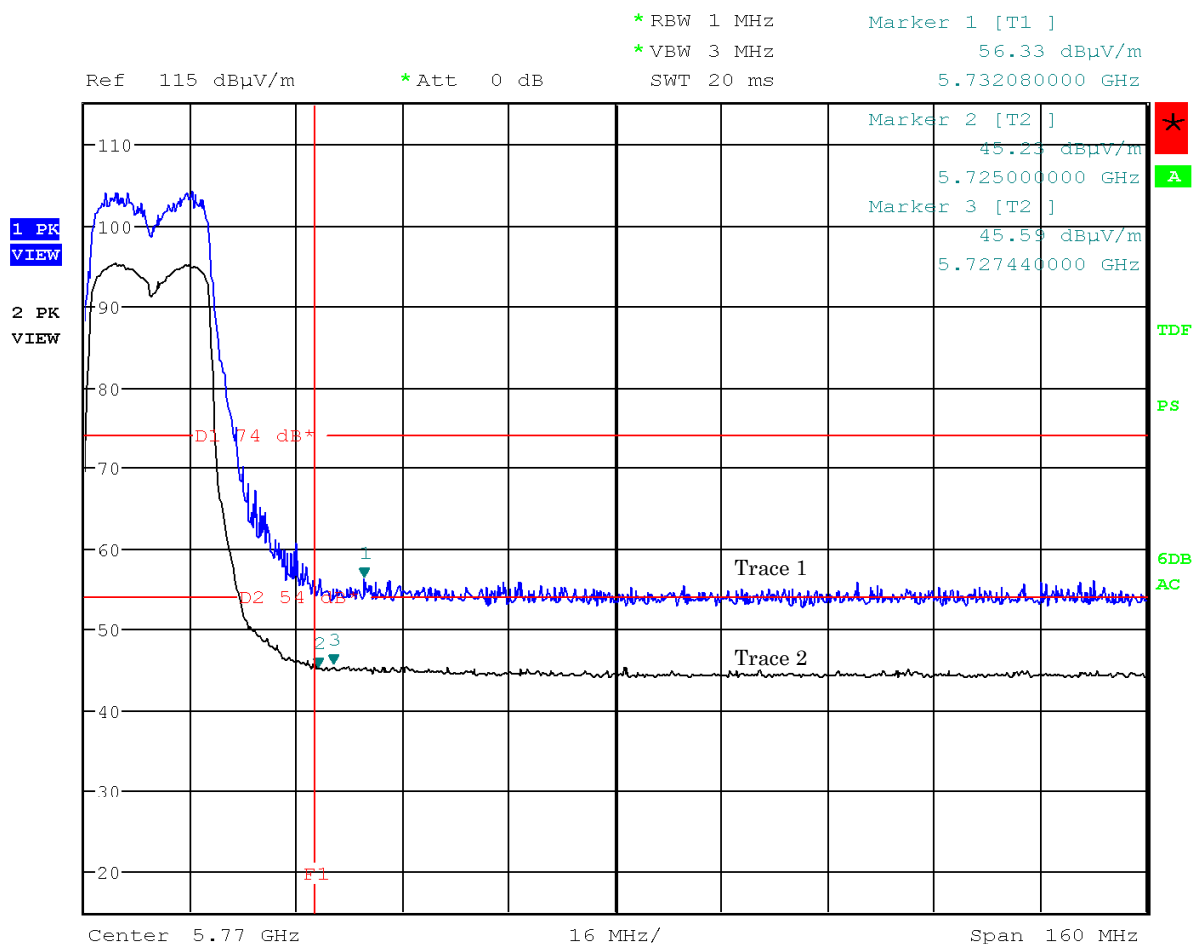

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 38ch: 5190 MHz)


Antenna Polarization : Horizontal

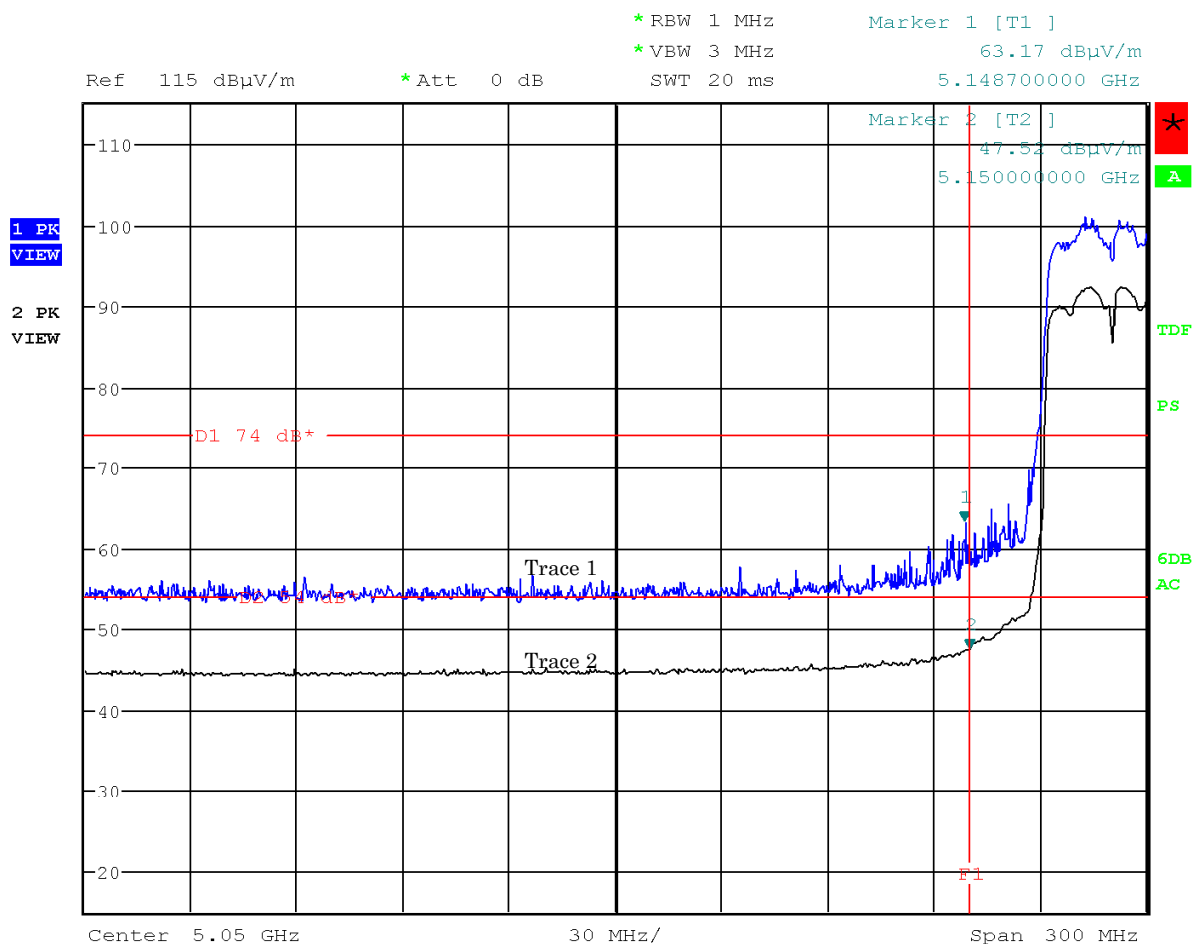

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 38ch: 5190 MHz)


Antenna Polarization : Vertical

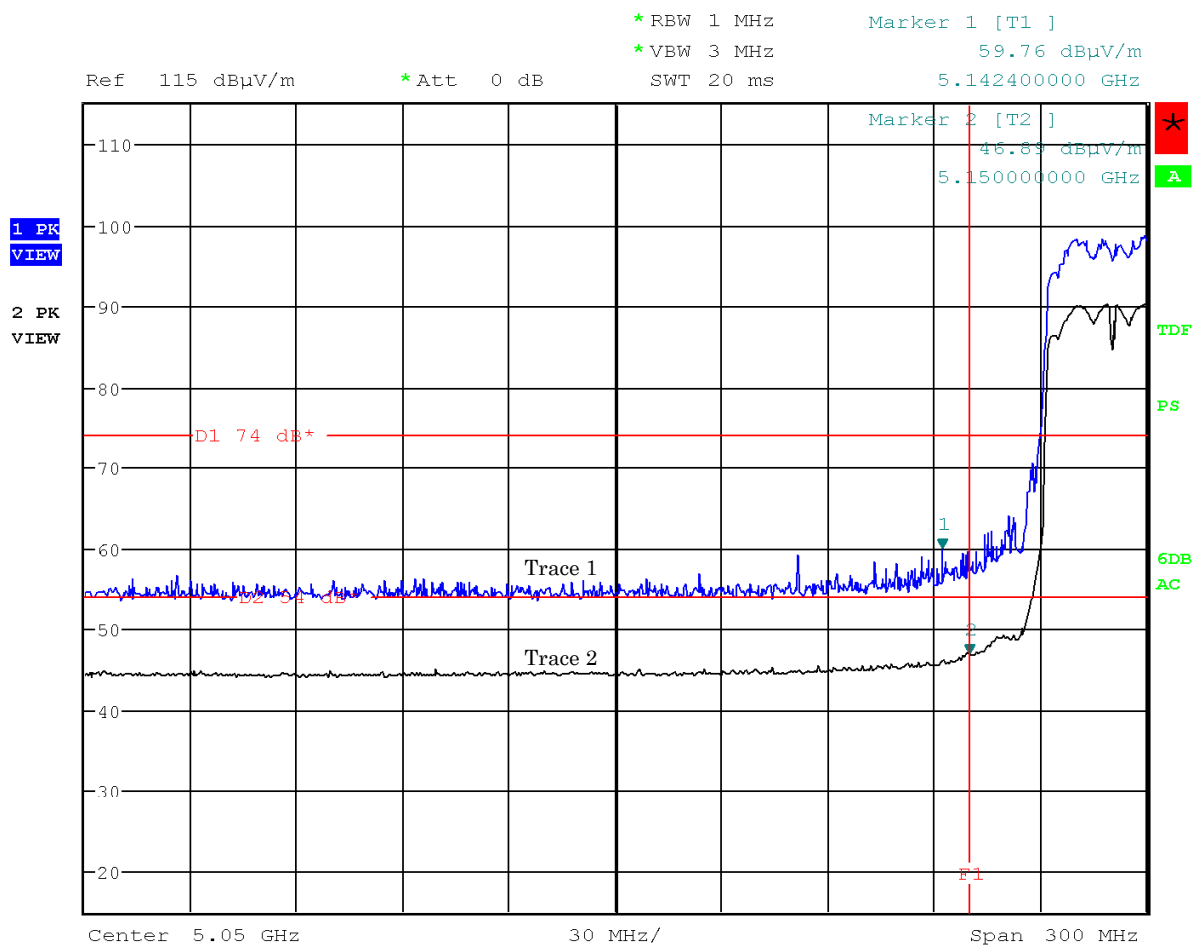

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 62ch: 5310 MHz)


Antenna Polarization : Horizontal

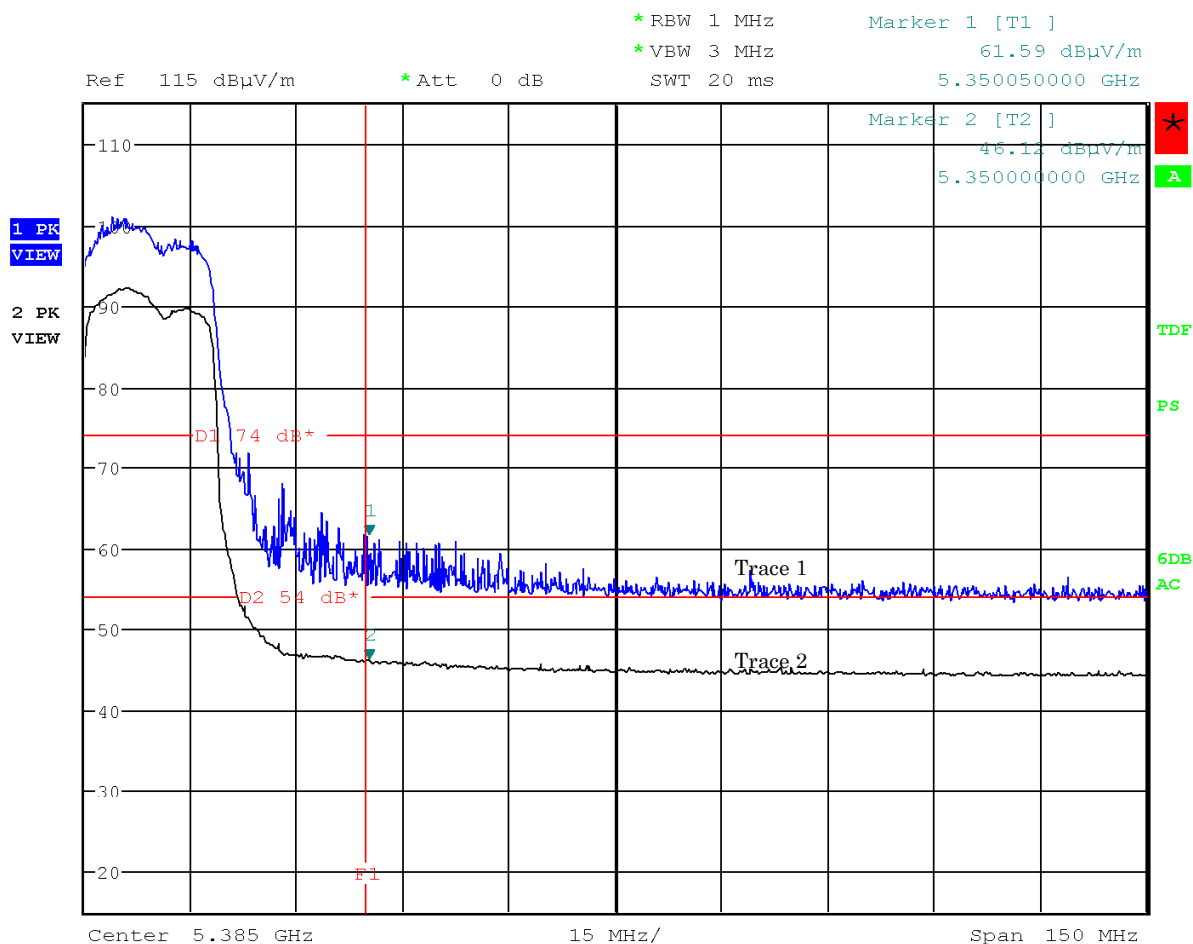

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 62ch: 5310 MHz)


Antenna Polarization : Vertical

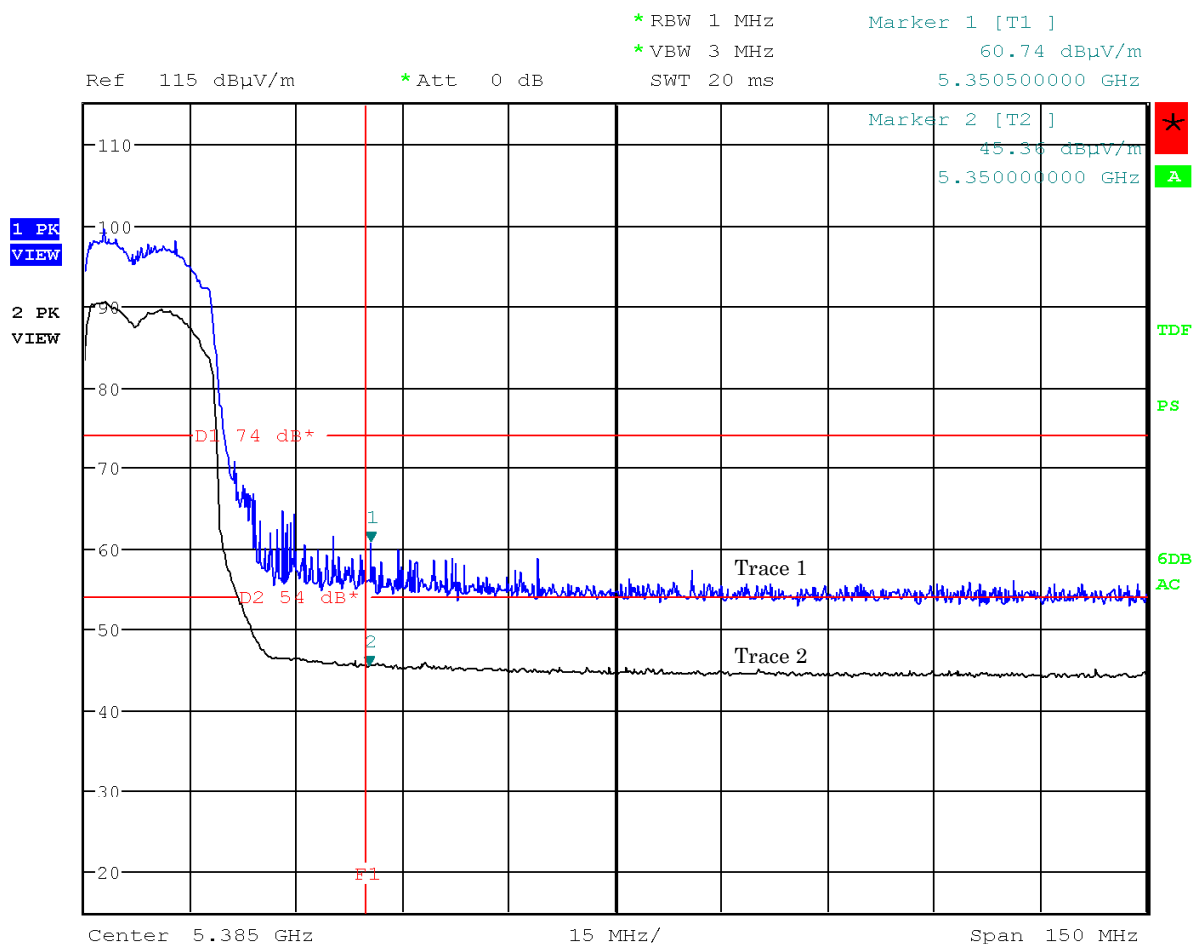

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 102ch: 5510 MHz)


Antenna Polarization : Horizontal

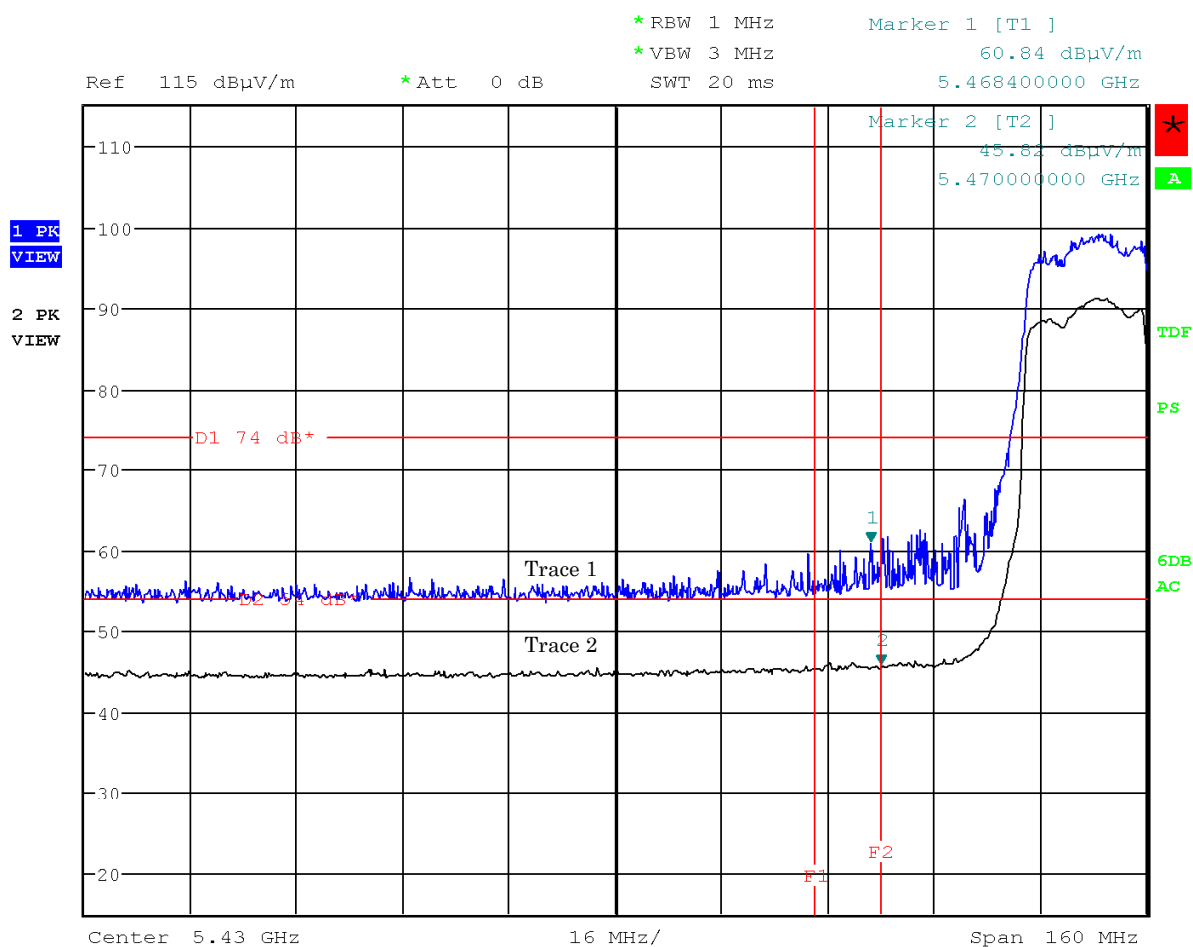

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 102ch: 5510 MHz)


Antenna Polarization : Vertical

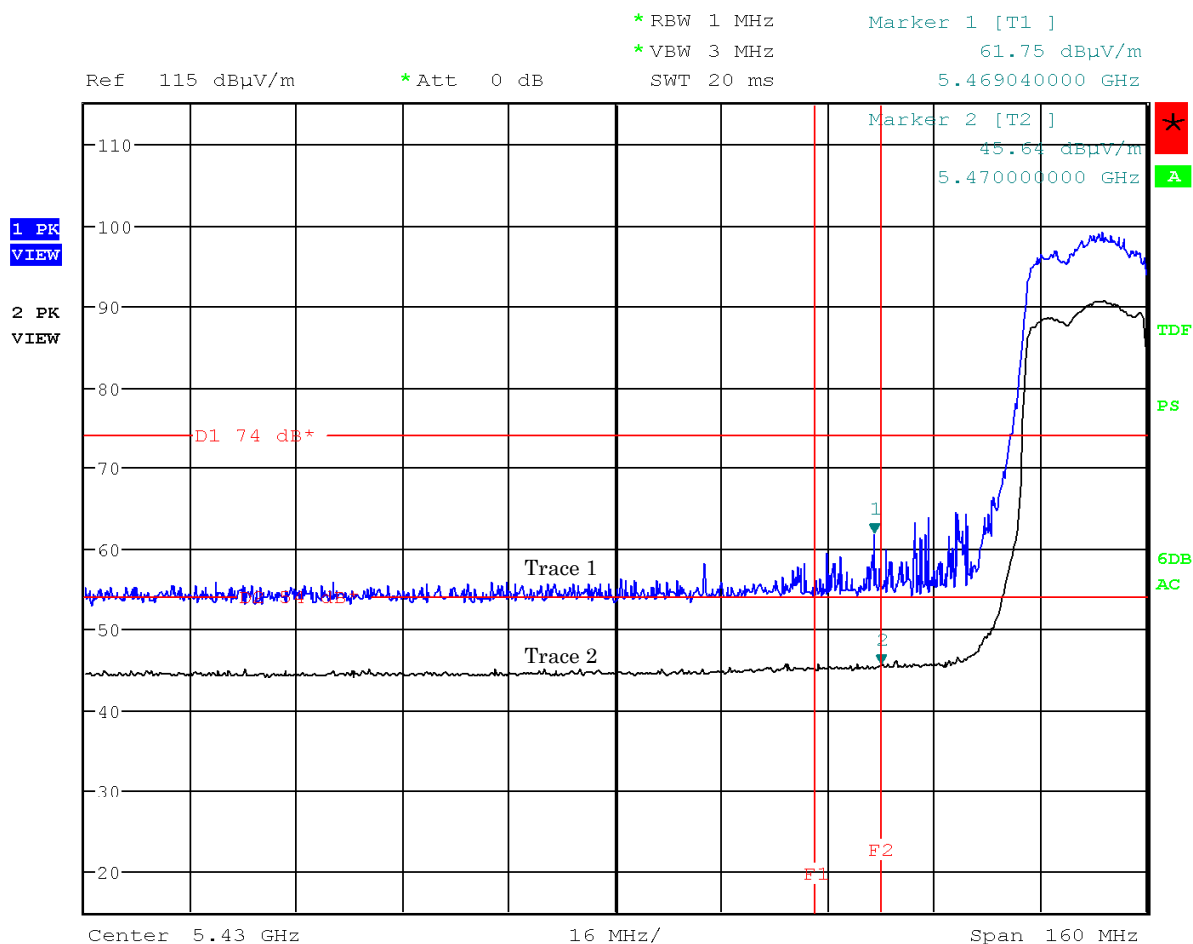

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 134ch: 5670 MHz)


Antenna Polarization : Horizontal

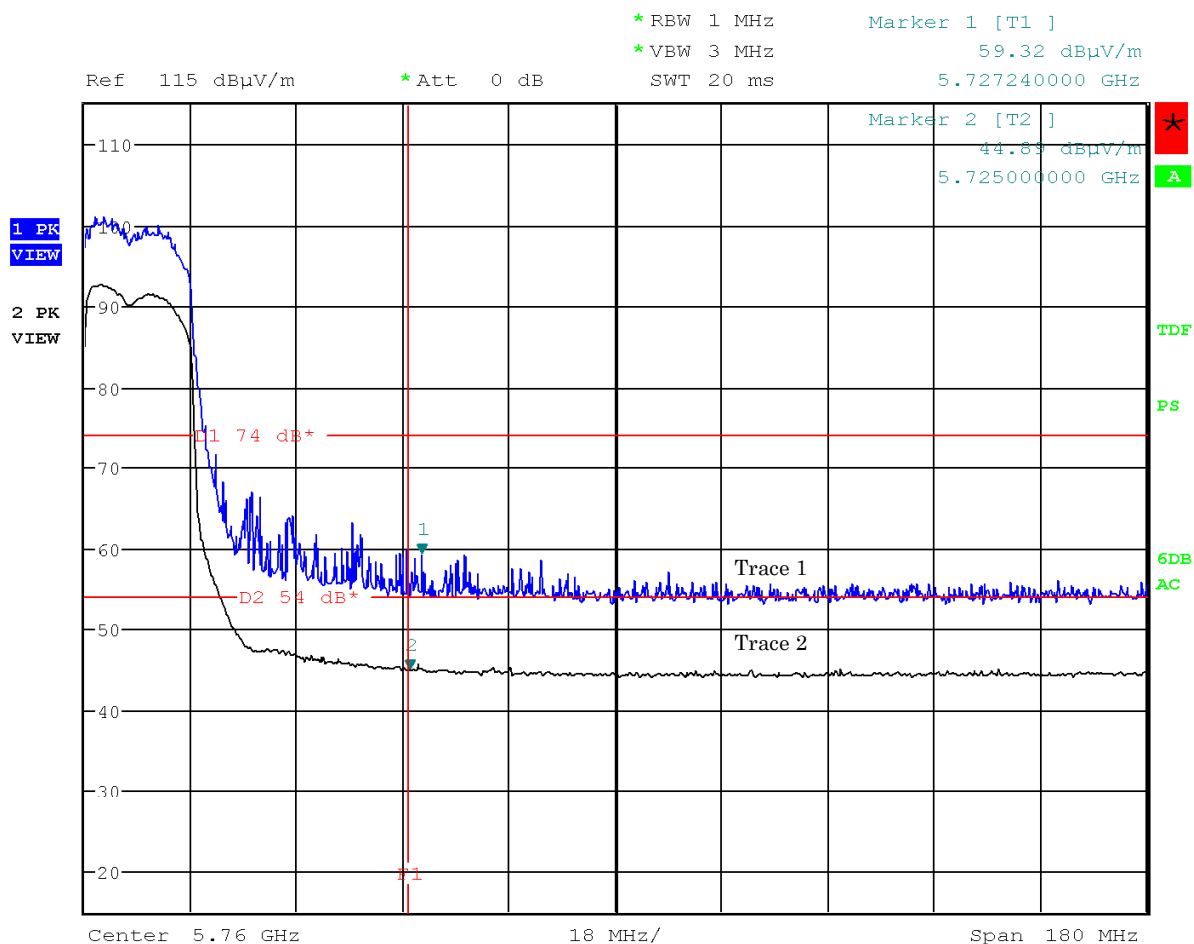

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11n: 40 MHz BW, 134ch: 5670 MHz)


Antenna Polarization : Vertical

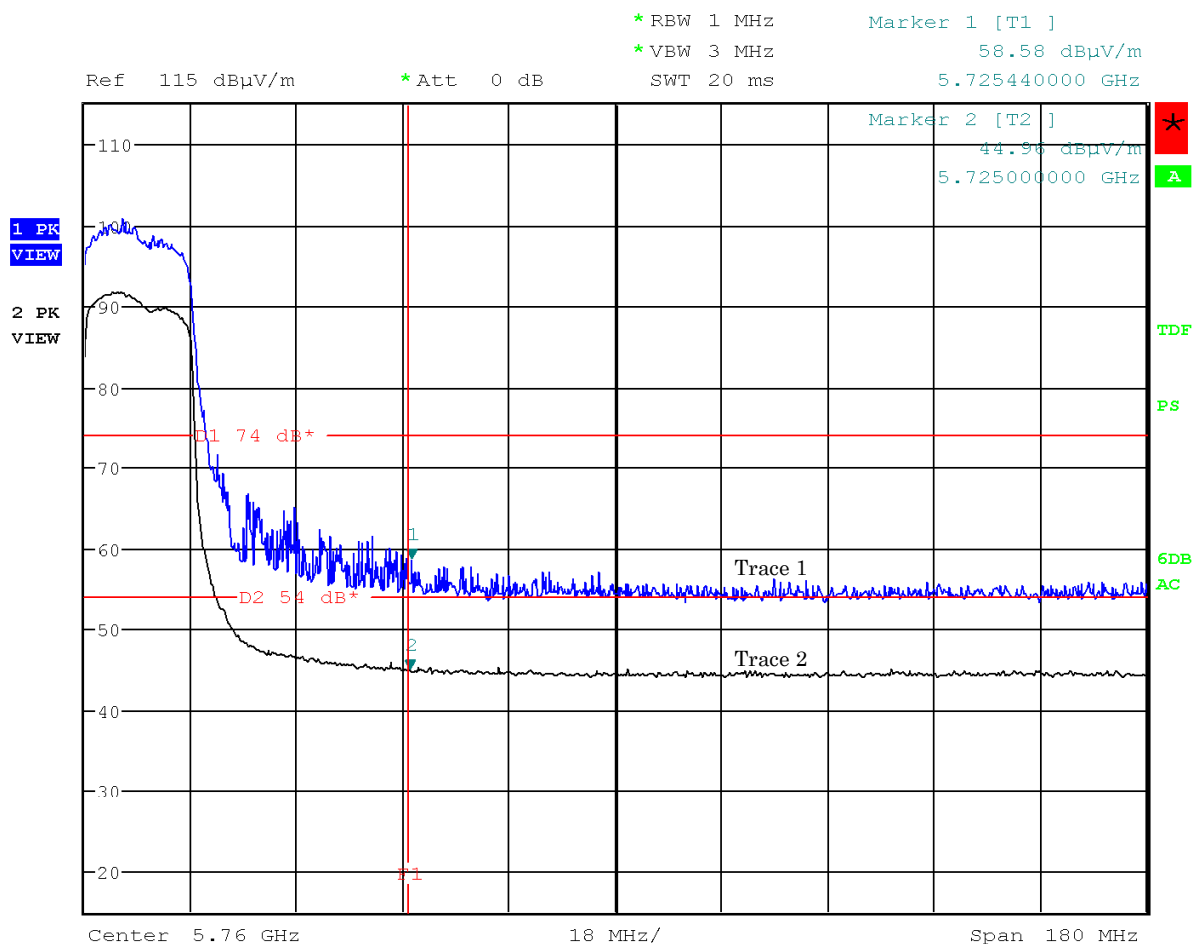

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 42ch: 5210 MHz)


Antenna Polarization : Horizontal

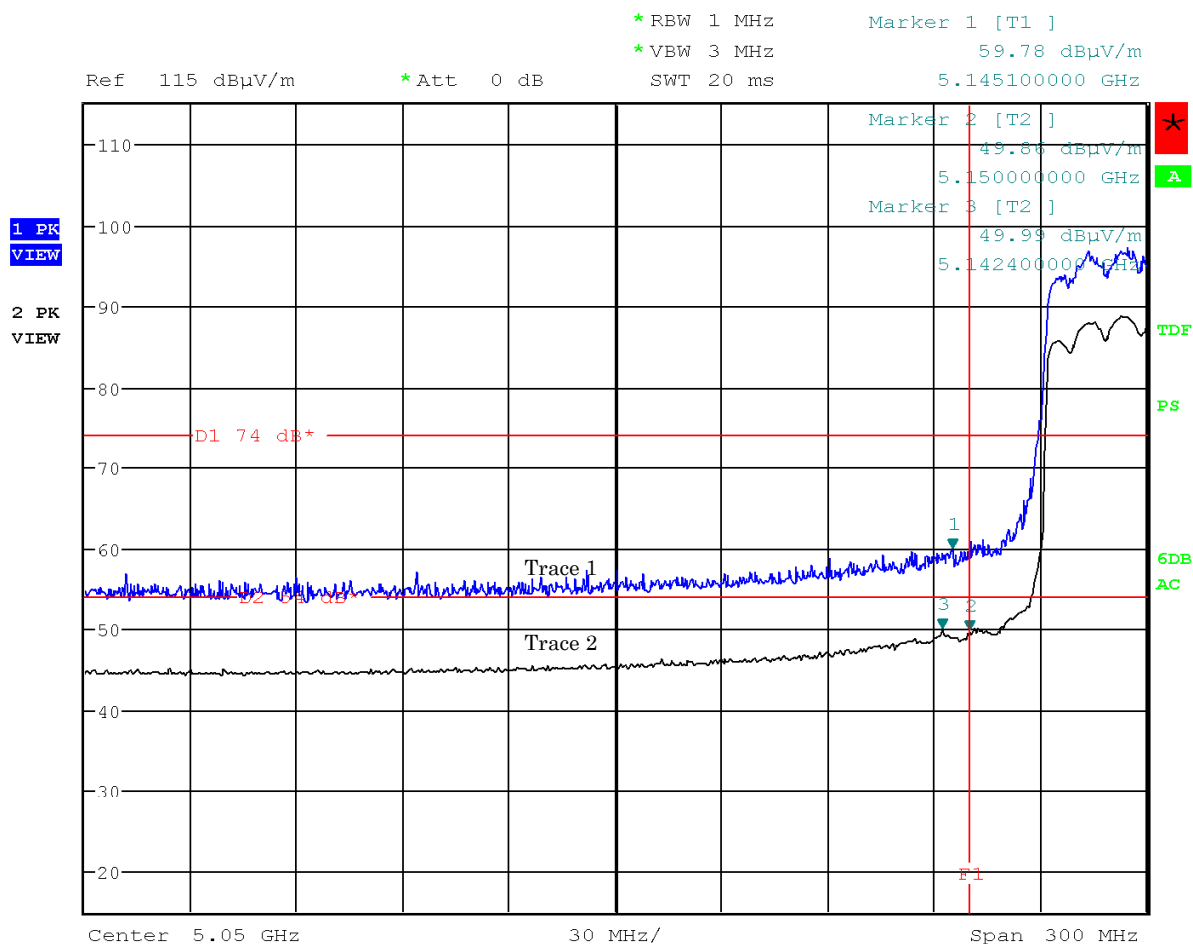

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 42ch: 5210 MHz)


Antenna Polarization : Vertical

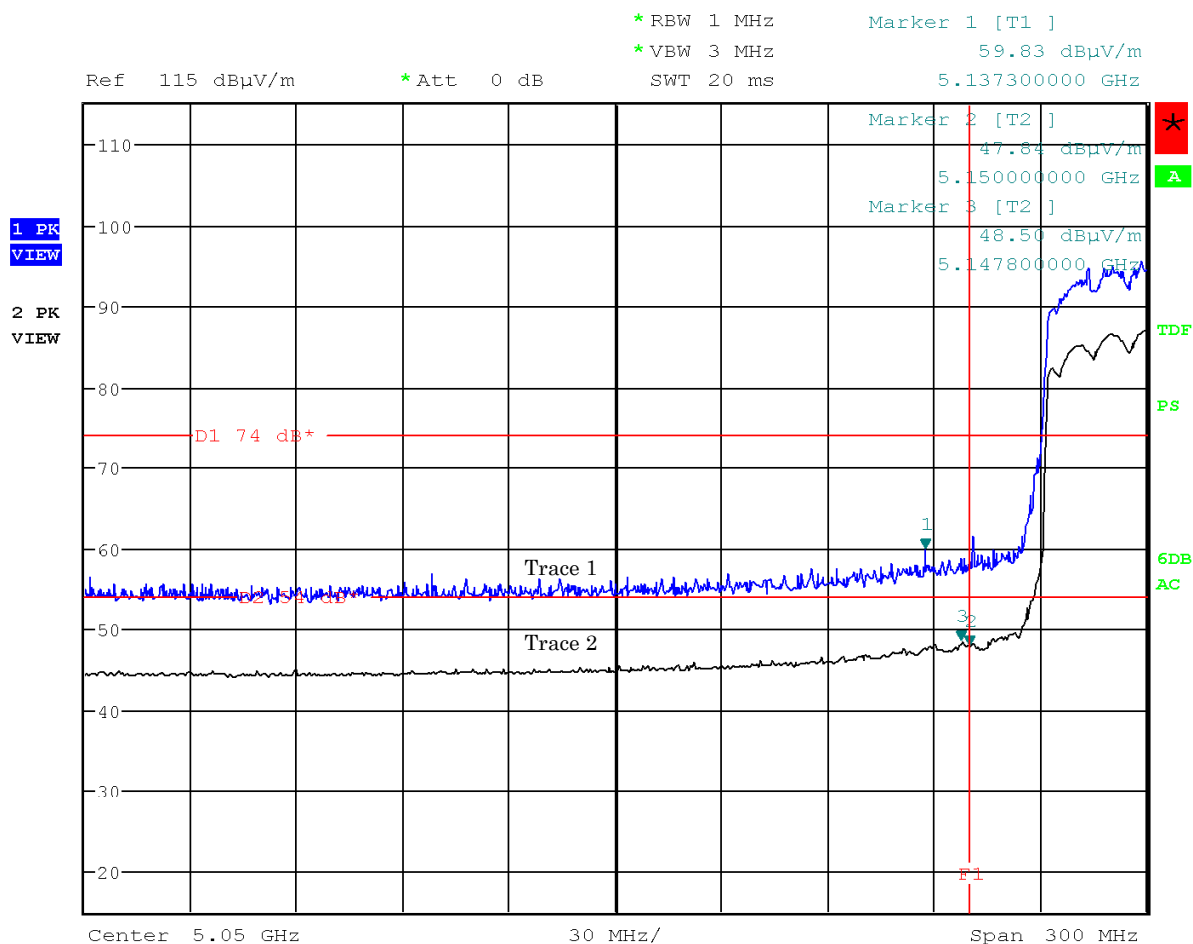

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 58ch: 5290 MHz)


Antenna Polarization : Horizontal

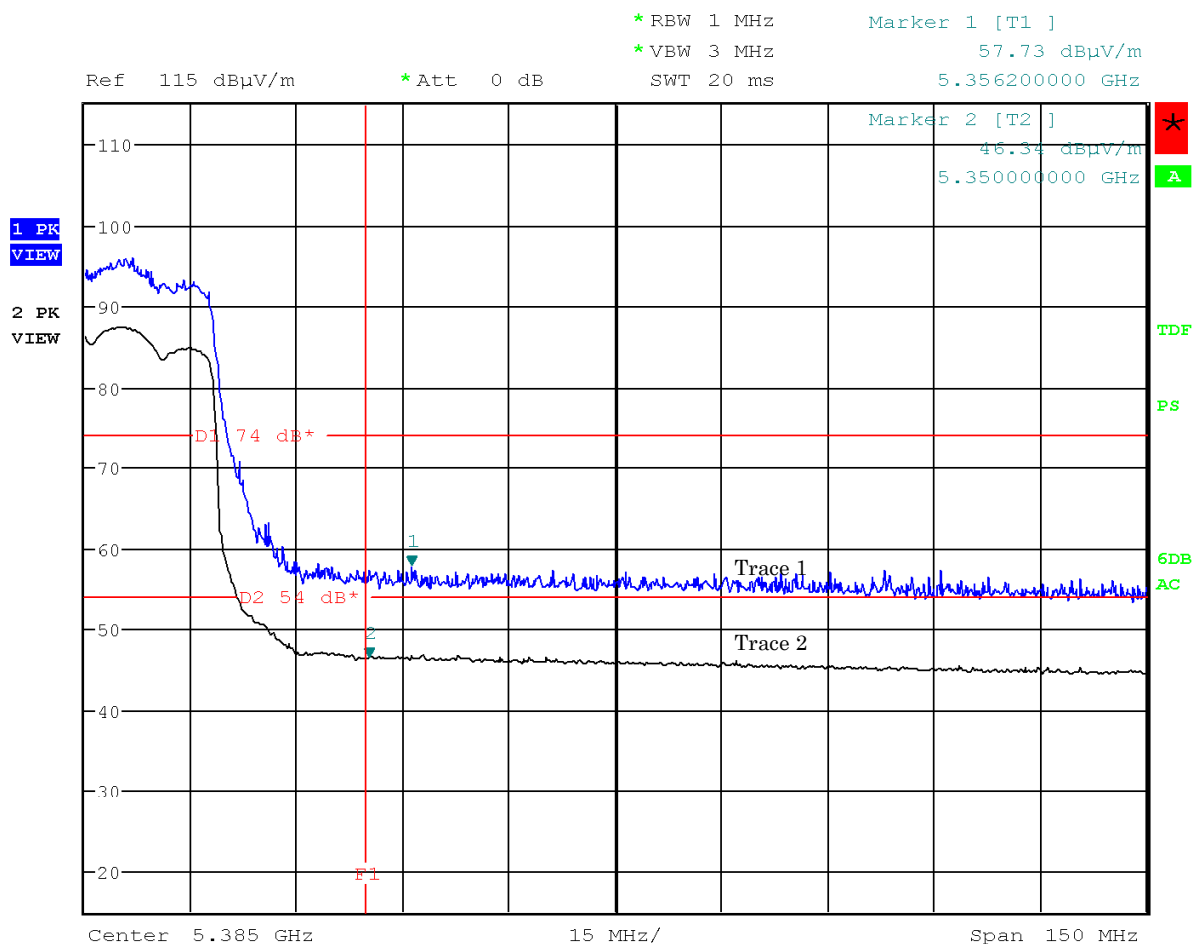

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 58ch: 5290 MHz)


Antenna Polarization : Vertical

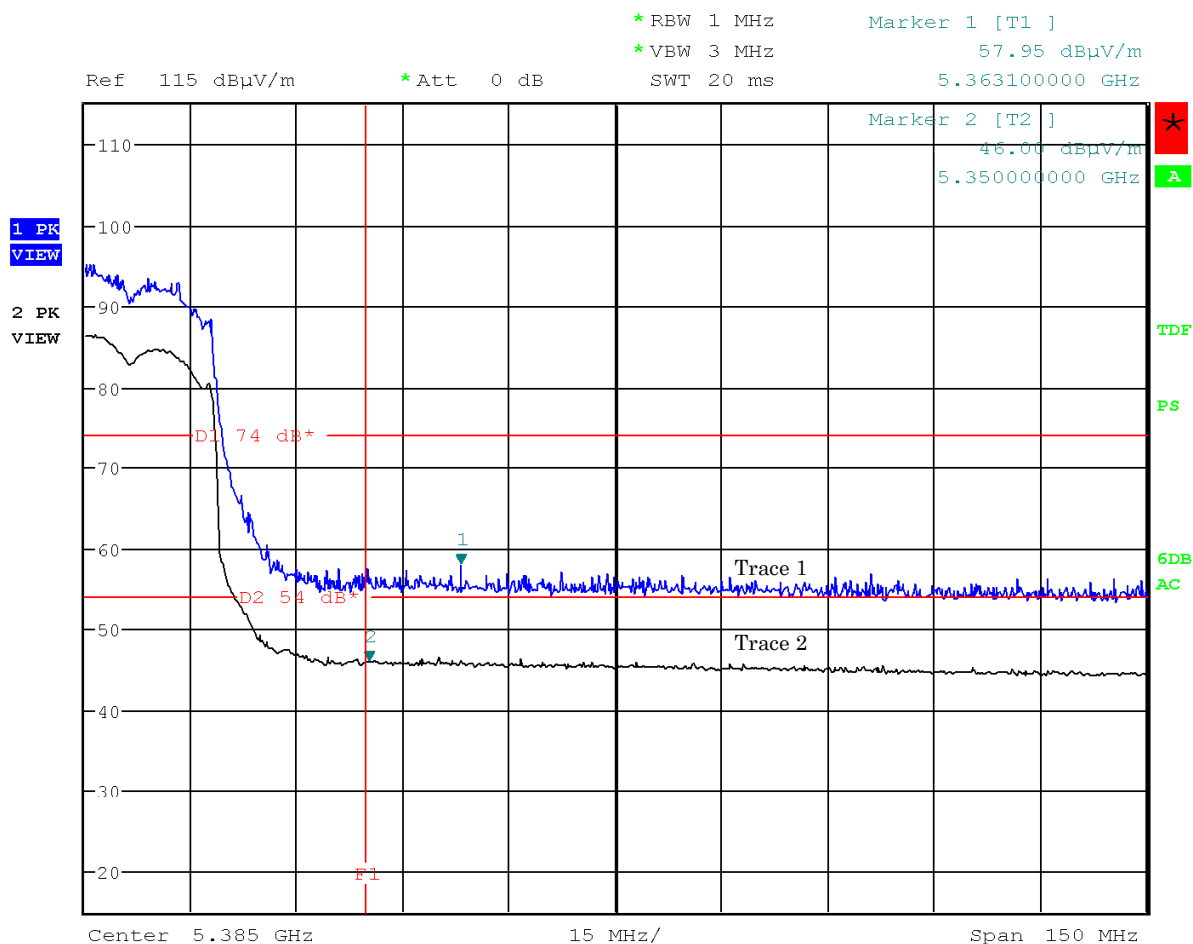

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 106ch: 5530 MHz)


Antenna Polarization : Horizontal

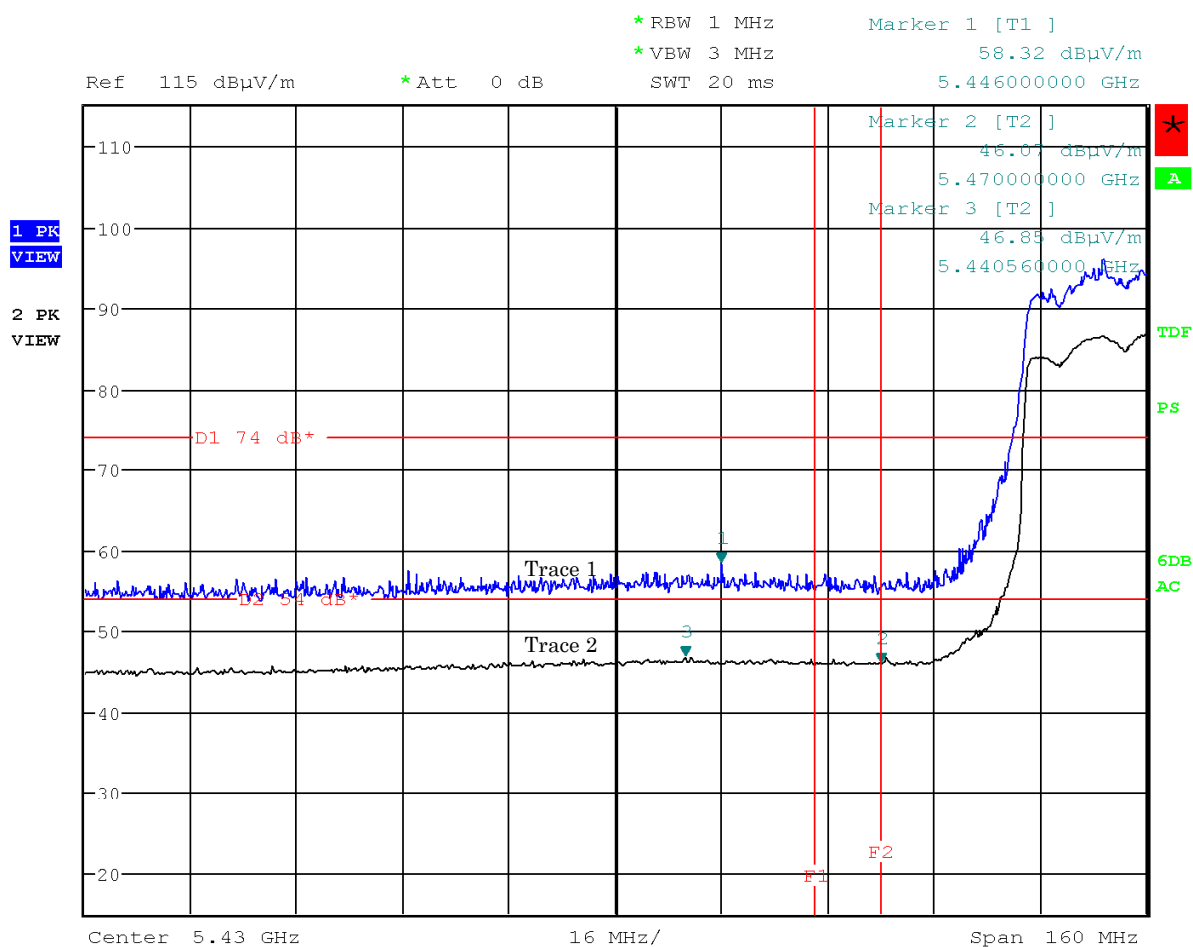

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 106ch: 5530 MHz)

Antenna Polarization : Vertical

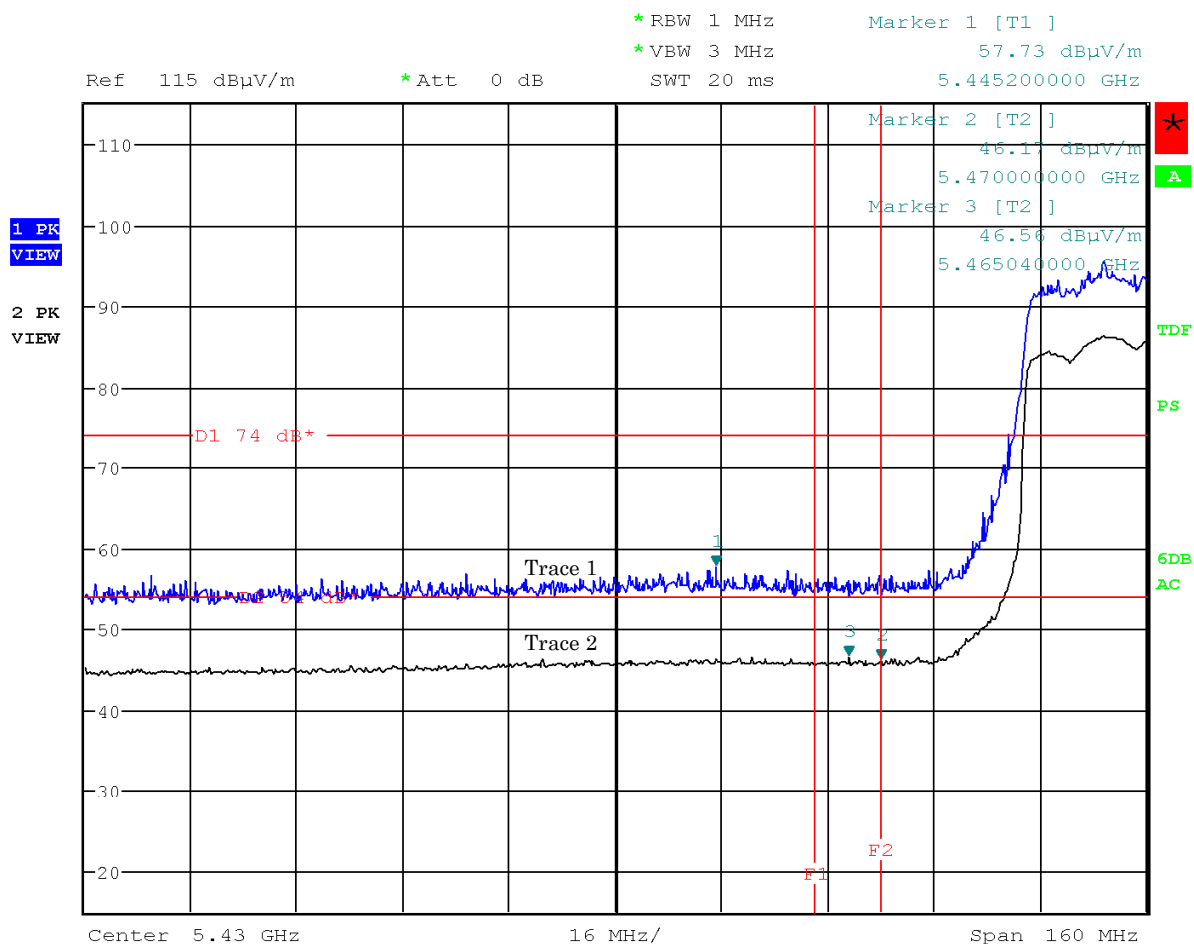

Note: The trace 1 is Peak . The trace 2 is Average.

7.6.4.2 Unwanted Radiated Emission 9 kHz – 30 MHz

Test Date : March 23, 2015

Temp.:20°C, Humi:34%

Mode of EUT : All mode have been investigated in accordance with clause 6.4 in this report.

Results : No spurious emissions in the range 20dB below the limit.

7.6.4.3 Unwanted Radiated Emission 30 MHz – 1000 MHz


Mode of EUT : All modes have been investigated and the worst case mode for channel (36ch: 5180MHz / IEEE802.11a) has been listed.

Test Date: March 23, 2015

Temp.: 20 °C, Humi: 34 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.65	12.8	-27.5	29.3	40.0	14.6	+25.4	-
403.35	16.4	-25.0	36.9	47.0	28.3	+18.7	-

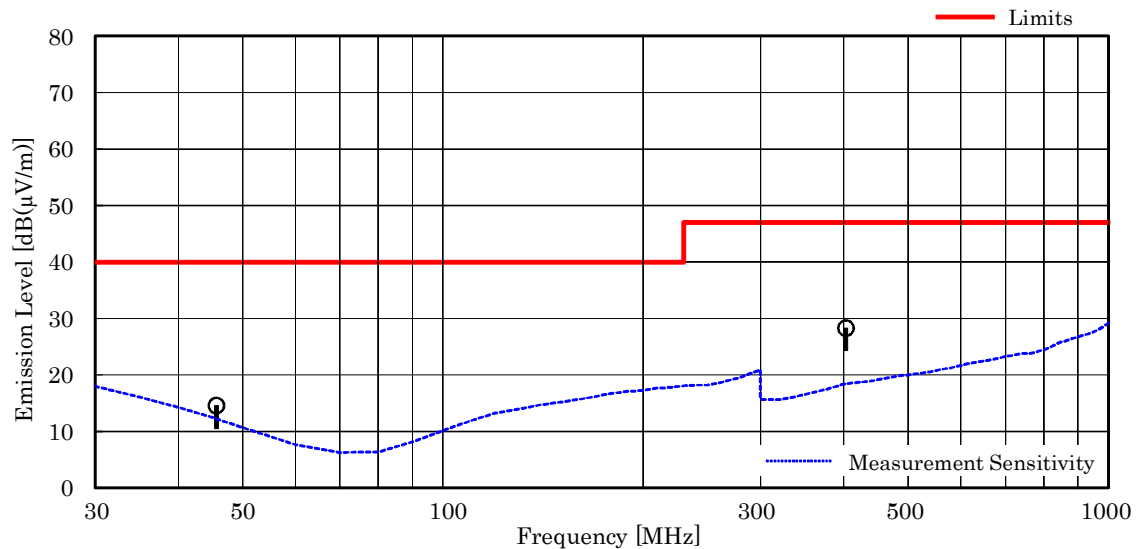

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 403.35 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 16.4 + (-25.0) + 36.9 = 28.3 dB(μV/m)
Antenna Height : 1.00 m, Turntable Angle : 193 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Test Date: March 23, 2015

Temp.: 20 °C, Humi: 34 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.65	12.8	-27.5	40.1	40.0	25.4	+14.6	-
403.35	16.4	-25.0	29.3	47.0	20.7	+26.3	-

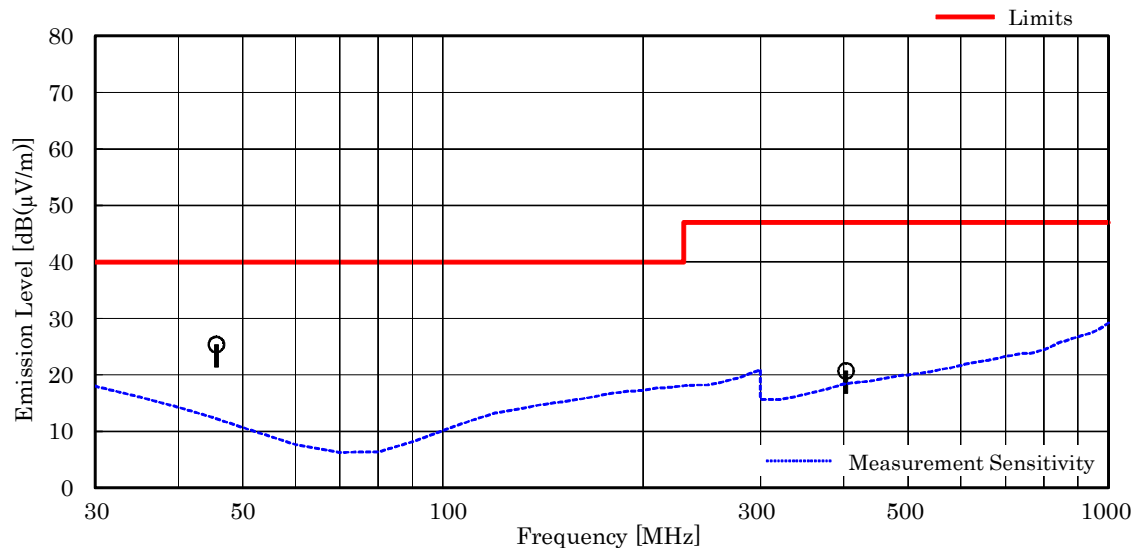

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 45.65 MHz, as the worst point shown on underline:

$$\text{Antenna Factor} + \text{Coorection Factor} + \text{Meter Reading} = 12.8 + (-27.5) + 40.1 = 25.4 \text{ dB}(\mu\text{V/m})$$

$$\text{Antenna Height} : 1.00 \text{ m, Turntable Angle} : 186^\circ$$
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

7.6.4.4 Unwanted Radiated Emission(Above 1 GHz)

7.6.4.4.1 Mode of TX

7.6.4.4.1.1 802.11a Radiated Emission Above 1 GHz

Mode of EUT : TX mode (802.11a, 5150 - 5250 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 36 Ch												
6906.7	29.8	-15.6	40.2	33.4	38.4	32.3	74.0	54.0	54.4	47.6	+ 6.4	
10360.0	33.4	-25.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.2	< 36.2	> +17.8	
15540.0	37.3	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.9	< 38.9	> +15.1	
20720.0	40.2	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
25900.0	40.8	-42.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31080.0	43.9	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.3	< 29.3	> +24.7	
36260.0	44.2	-48.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
Test condition : Tx 44 Ch												
6960.1	29.8	-15.7	39.3	32.5	38.7	32.5	74.0	54.0	53.4	46.6	+ 7.4	
10440.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15660.0	37.4	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.1	< 39.1	> +14.9	
20880.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26100.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31320.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36540.0	44.4	-48.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.2	< 36.2	> +17.8	
Test condition : Tx 48 Ch												
6986.6	29.9	-15.7	39.7	32.3	38.5	32.4	74.0	54.0	53.9	46.6	+ 7.4	
10480.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15720.0	37.4	-26.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
20960.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26200.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31440.0	43.8	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.1	< 29.1	> +24.9	
36680.0	44.5	-48.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.3	< 36.3	> +17.7	

Calculated result at 6906.7 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-15.6 dB
+) Meter Reading	=	33.4 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11a, 5250 – 5350 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 52 Ch												
7013.3	29.9	-15.8	40.2	32.9	39.4	32.6	74.0	54.0	54.3	47.0	+ 7.0	
10520.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15780.0	37.4	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
21040.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26300.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31560.0	43.8	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.1	< 29.1	> +24.9	
36820.0	44.5	-48.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
Test condition : Tx 56 Ch												
7040.0	29.8	-15.8	40.4	32.5	38.9	32.5	74.0	54.0	54.4	46.5	+ 7.5	
10560.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15840.0	37.4	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
21120.0	40.3	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	
26400.0	40.6	-41.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31680.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36960.0	44.4	-48.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
Test condition : Tx 64 Ch												
7093.4	29.9	-15.9	39.4	32.3	38.2	32.0	74.0	54.0	53.4	46.3	+ 7.7	
10640.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15960.0	37.4	-25.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.6	< 39.6	> +14.4	
21280.0	40.4	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26600.0	43.4	-60.2	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 41.2	< 31.2	> +22.8	
31920.0	43.7	-54.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
37240.0	44.3	-47.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	

Calculated result at 7013.3 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-15.8 dB
+) Meter Reading	=	32.9 dB(μV)
Result	=	47.0 dB(μV/m)

Minimum Margin: 54.0 - 47.0 = 7.0 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11a, 5470 – 5725 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 100 Ch												
7333.3	29.8	-16.2	39.8	34.0	38.7	32.9	74.0	54.0	53.4	47.6	+ 6.4	
11000.0	33.5	-24.7	40.9	30.1	39.7	29.8	74.0	54.0	49.7	38.9	+15.1	
16500.0	37.4	-25.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.6	< 39.6	> +14.4	
22000.0	40.5	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
27500.0	43.9	-58.9	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 43.0	< 33.0	> +21.0	
33000.0	44.0	-53.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.3	< 30.3	> +23.7	
38500.0	44.3	-43.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 50.5	< 40.5	> +13.5	
Test condition : Tx 116 Ch												
7440.0	29.8	-16.3	38.7	32.9	38.1	31.9	74.0	54.0	52.2	46.4	+ 7.6	
11160.0	33.4	-24.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
16740.0	37.6	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.5	< 40.5	> +13.5	
22320.0	40.6	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
27900.0	43.8	-57.7	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 44.1	< 34.1	> +19.9	
33480.0	44.0	-53.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.8	< 30.8	> +23.2	
39060.0	44.3	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 52.3	< 42.3	> +11.7	
Test condition : Tx 140 Ch												
7600.0	29.8	-16.4	38.4	32.4	38.1	31.8	74.0	54.0	51.8	45.8	+ 8.2	
11400.0	33.3	-24.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
17100.0	37.6	-23.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 52.0	< 42.0	> +12.0	
22800.0	40.5	-43.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	
28500.0	43.8	-56.4	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 45.4	< 35.4	> +18.6	
34200.0	44.0	-51.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 42.3	< 32.3	> +21.7	
39900.0	44.6	-41.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 53.6	< 43.6	> +10.4	

Calculated result at 7333.3 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.2 dB
+) Meter Reading	=	34.0 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:

Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

7.6.4.4.1.2 802.11n (20 MHz) Radiated Emission Above 1 GHz

Mode of EUT : TX mode (802.11n: 20 MHz BW, 5150 - 5250 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx 36 Ch												
6906.7	29.8	-15.6	40.2	33.4	38.4	32.3	74.0	54.0	54.4	47.6	+ 6.4	
10360.0	33.4	-25.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.2	< 36.2	> +17.8	
15540.0	37.3	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.9	< 38.9	> +15.1	
20720.0	40.2	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
25900.0	40.8	-42.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31080.0	43.9	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.3	< 29.3	> +24.7	
36260.0	44.2	-48.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
Test condition : Tx 44 Ch												
6960.1	29.8	-15.7	39.3	32.5	38.7	32.5	74.0	54.0	53.4	46.6	+ 7.4	
10440.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15660.0	37.4	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.1	< 39.1	> +14.9	
20880.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26100.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31320.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36540.0	44.4	-48.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.2	< 36.2	> +17.8	
Test condition : Tx 48 Ch												
6986.6	29.9	-15.7	39.7	32.3	38.5	32.4	74.0	54.0	53.9	46.6	+ 7.4	
10480.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15720.0	37.4	-26.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
20960.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26200.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31440.0	43.8	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.1	< 29.1	> +24.9	
36680.0	44.5	-48.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.3	< 36.3	> +17.7	

Calculated result at 6906.7 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-15.6 dB
+) Meter Reading	=	33.4 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:

Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11n: 20 MHz BW, 5250 – 5350 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 52 Ch												
7013.3	29.9	-15.8	40.2	32.9	39.4	32.6	74.0	54.0	54.3	47.0	+ 7.0	
10520.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15780.0	37.4	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
21040.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26300.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31560.0	43.8	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.1	< 29.1	> +24.9	
36820.0	44.5	-48.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
Test condition : Tx 56 Ch												
7040.0	29.8	-15.8	40.4	32.5	38.9	32.5	74.0	54.0	54.4	46.5	+ 7.5	
10560.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15840.0	37.4	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
21120.0	40.3	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	
26400.0	40.6	-41.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31680.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36960.0	44.4	-48.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
Test condition : Tx 64 Ch												
7093.4	29.9	-15.9	39.4	32.3	38.2	32.0	74.0	54.0	53.4	46.3	+ 7.7	
10640.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15960.0	37.4	-25.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.6	< 39.6	> +14.4	
21280.0	40.4	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26600.0	43.4	-60.2	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 41.2	< 31.2	> +22.8	
31920.0	43.7	-54.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
37240.0	44.3	-47.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	

Calculated result at 7013.3 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-15.8 dB
+) Meter Reading	=	32.9 dB(μV)
Result	=	47.0 dB(μV/m)

Minimum Margin: 54.0 - 47.0 = 7.0 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11n: 20 MHz BW, 5470 – 5725 MHz Band)

Test Date: March 17, 2015

Temp.: 20 °C, Humi: 57 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 100 Ch												
7333.3	29.8	-16.2	39.8	34.0	38.7	32.9	74.0	54.0	53.4	47.6	+ 6.4	
11000.0	33.5	-24.7	39.9	29.8	39.5	29.6	74.0	54.0	48.7	38.6	+15.4	
16500.0	37.4	-25.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.6	< 39.6	> +14.4	
22000.0	40.5	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
27500.0	43.9	-58.9	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 43.0	< 33.0	> +21.0	
33000.0	44.0	-53.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.3	< 30.3	> +23.7	
38500.0	44.3	-43.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 50.5	< 40.5	> +13.5	
Test condition : Tx 116 Ch												
7440.0	29.8	-16.3	38.7	32.9	38.1	31.9	74.0	54.0	52.2	46.4	+ 7.6	
11160.0	33.4	-24.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
16740.0	37.6	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.5	< 40.5	> +13.5	
22320.0	40.6	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
27900.0	43.8	-57.7	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 44.1	< 34.1	> +19.9	
33480.0	44.0	-53.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.8	< 30.8	> +23.2	
39060.0	44.3	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 52.3	< 42.3	> +11.7	
Test condition : Tx 140 Ch												
7600.0	29.8	-16.4	38.4	32.4	38.1	31.8	74.0	54.0	51.8	45.8	+ 8.2	
11400.0	33.3	-24.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
17100.0	37.6	-23.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 52.0	< 42.0	> +12.0	
22800.0	40.5	-43.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	
28500.0	43.8	-56.4	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 45.4	< 35.4	> +18.6	
34200.0	44.0	-51.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 42.3	< 32.3	> +21.7	
39900.0	44.6	-41.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 53.6	< 43.6	> +10.4	

Calculated result at 7333.3 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.2 dB
+) Meter Reading	=	34.0 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

7.6.4.4.1.3 802.11n (40 MHz) Radiated Emission Above 1 GHz

Mode of EUT : TX mode (802.11n: 40 MHz BW, 5150 - 5250 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx 38 Ch												
6920.0	29.8	-15.6	40.1	33.4	38.7	32.9	74.0	54.0	54.3	47.6	+ 6.4	
10380.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15570.0	37.4	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.0	< 39.0	> +15.0	
20760.0	40.2	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
25950.0	40.8	-42.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.6	< 38.6	> +15.4	
31140.0	43.9	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36330.0	44.2	-48.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
Test condition : Tx 46 Ch												
6973.4	29.9	-15.7	39.2	33.3	39.1	33.0	74.0	54.0	53.4	47.5	+ 6.5	
10460.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15690.0	37.4	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
20920.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26150.0	40.7	-42.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.7	< 38.7	> +15.3	
31380.0	43.9	-54.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36610.0	44.4	-48.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.3	< 36.3	> +17.7	

Calculated result at 6920.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-15.6 dB
+) Meter Reading	=	33.4 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

- Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
- The spectrum was checked from 1 GHz to 40 GHz.
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11n: 40 MHz BW, 5250 – 5350 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
	[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	
Test condition : Tx 54 Ch												
7026.7	29.9	-15.8	40.2	33.9	39.7	33.4	74.0	54.0	54.3	48.0	+ 6.0	
10540.0	33.4	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
15810.0	37.5	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
21080.0	40.3	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.8	< 36.8	> +17.2	
26350.0	40.6	-41.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.8	< 38.8	> +15.2	
31620.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36890.0	44.5	-48.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.4	< 36.4	> +17.6	
Test condition : Tx 62 Ch												
7080.0	29.8	-15.9	40.0	33.4	39.3	33.2	74.0	54.0	53.9	47.3	+ 6.7	
10620.0	33.5	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.5	< 36.5	> +17.5	
15930.0	37.4	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
21240.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26550.0	43.5	-60.5	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 41.0	< 31.0	> +23.0	
31860.0	43.8	-54.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.3	< 29.3	> +24.7	
37170.0	44.4	-47.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.7	< 36.7	> +17.3	

Calculated result at 7026.7 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-15.8 dB
+) Meter Reading	=	33.9 dB(μV)
Result	=	48.0 dB(μV/m)

Minimum Margin: 54.0 - 48.0 = 6.0 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11n: 40 MHz BW, 5470 – 5725 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
	[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	
Test condition : Tx 102 Ch												
7346.7	29.8	-16.2	40.0	34.4	39.7	33.7	74.0	54.0	53.6	48.0	+ 6.0	
11020.0	33.4	-24.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
16530.0	37.4	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.7	< 39.7	> +14.3	
22040.0	40.5	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
27550.0	43.8	-58.7	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 43.1	< 33.1	> +20.9	
33060.0	44.0	-53.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.3	< 30.3	> +23.7	
38570.0	44.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
Test condition : Tx 134 Ch												
7560.0	29.7	-16.4	39.0	33.5	39.3	32.9	74.0	54.0	52.6	46.8	+ 7.2	
11340.0	33.3	-24.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
17010.0	37.6	-23.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.7	< 41.7	> +12.3	
22680.0	40.5	-43.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.0	< 37.0	> +17.0	
28350.0	43.8	-56.6	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
34020.0	44.0	-52.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 41.9	< 31.9	> +22.1	
39690.0	44.7	-41.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 53.5	< 43.5	> +10.5	

Calculated result at 7346.7 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.2 dB
+) Meter Reading	=	34.4 dB(μV)
Result	=	48.0 dB(μV/m)

Minimum Margin: 54.0 - 48.0 = 6.0 (dB)

NOTES

- Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
- The spectrum was checked from 1 GHz to 40 GHz.
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.6.4.4.1.4 802.11ac (80 MHz) Radiated Emission Above 1 GHz

Mode of EUT : TX mode (802.11ac: 80 MHz BW, 5150 - 5250 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx 42 Ch												
6946.7	29.8	-15.7	40.3	33.7	39.0	32.9	74.0	54.0	54.4	47.8	+ 6.2	
10420.0	33.4	-25.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.3	< 36.3	> +17.7	
15630.0	37.4	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.1	< 39.1	> +14.9	
20840.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26050.0	40.7	-42.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 48.5	< 38.5	> +15.5	
31260.0	43.8	-54.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.2	< 29.2	> +24.8	
36470.0	44.4	-48.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.0	< 36.0	> +18.0	

Calculated result at 6946.7 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-15.7 dB
+) Meter Reading	=	33.7 dB(μV)
Result	=	47.8 dB(μV/m)

Minimum Margin: 54.0 - 47.8 = 6.2 (dB)

NOTES

- Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
- The spectrum was checked from 1 GHz to 40 GHz.
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11ac: 80 MHz, 5250 – 5350 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx 58 Ch												
7053.4	29.8	-15.8	40.2	33.9	39.7	33.1	74.0	54.0	54.2	47.9	+ 6.1	
10580.0	33.5	-25.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.5	< 36.5	> +17.5	
15870.0	37.4	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
21160.0	40.3	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	
26450.0	40.7	-41.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 49.0	< 39.0	> +15.0	
31740.0	43.8	-54.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 39.3	< 29.3	> +24.7	
37030.0	44.4	-47.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.5	< 36.5	> +17.5	

Calculated result at 7053.4 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-15.8 dB
+) Meter Reading	=	33.9 dB(μV)
Result	=	47.9 dB(μV/m)

Minimum Margin: 54.0 - 47.9 = 6.1 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : TX mode (802.11ac: 80 MHz, 5470 – 5725 MHz Band)

Test Date: March 19, 2015

Temp.: 21 °C, Humi: 72 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx 106 Ch												
7373.4	29.8	-16.2	39.7	34.0	38.9	33.3	74.0	54.0	53.3	47.6	+ 6.4	
11060.0	33.4	-24.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
16590.0	37.5	-25.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.9	< 39.9	> +14.1	
22120.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	
27650.0	43.7	-58.3	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 43.4	< 33.4	> +20.6	
33180.0	44.0	-53.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 40.5	< 30.5	> +23.5	
38710.0	44.3	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 51.4	< 41.4	> +12.6	
Test condition : Tx 122 Ch												
7440.0	29.8	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.5	< 41.5	> +12.5	
11220.0	33.3	-24.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.7	< 36.7	> +17.3	
16830.0	37.5	-24.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
22440.0	40.6	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
28050.0	43.8	-57.2	< 58.0	< 48.0	< 58.0	< 48.0	74.0	54.0	< 44.6	< 34.6	> +19.4	
33660.0	44.0	-52.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 41.3	< 31.3	> +22.7	
39270.0	44.4	-41.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 52.9	< 42.9	> +11.1	

Calculated result at 7373.4 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.2 dB
+) Meter Reading	=	34.0 dB(μV)
Result	=	47.6 dB(μV/m)

Minimum Margin: 54.0 - 47.6 = 6.4 (dB)

NOTES

- Test Distance : 3 m (1 GHz to 26.5 GHz) / 1m (26.5 GHz to 40 GHz)
- The spectrum was checked from 1 GHz to 40 GHz.
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26.5GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26.5GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.7 Dynamic Frequency Selection

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.7.1 Test Result and Measurement Uncertainty

7.7.1.1 Channel Moving Time (Limit : < 10 sec.)

802.11n 20 MHz	<u>0.140</u>	sec.	at	<u>5500</u> MHz
802.11n 40 MHz	<u>0.142</u>	sec.	at	<u>5510</u> MHz

7.7.1.2 Channel Closing Transmission Time (Limit : < 60 msec.)

802.11n 20 MHz	<u>0.000</u>	msec.	at	<u>5500</u> MHz
802.11n 40 MHz	<u>0.000</u>	msec.	at	<u>5510</u> MHz

7.7.1.3 Non-occupancy Period (Limit : ≥ 30 min.)

802.11n 20 MHz	<u>> 30</u>	min.	at	<u>5500</u> MHz
802.11n 40 MHz	<u>> 30</u>	min.	at	<u>5510</u> MHz

Uncertainty of Measurement Results +/- 0.6 %

Remarks : The EUT is a client without radar detection therefore applicable requirements are only the above. Test was performed using a radar type 0. The Master device does not have capability of operating at 80MHz Channel BW, therefore tests were performed with the operating mode of 20MHz/40MHz BW. (Refer to the KDB publication 848637.)

7.7.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Vector Signal Generator	MG3710A	Anritsu	B-41	2014/8	1 Year
Horn Antenna(*1)	3160-05	EMCO	C-56	2014/6	1 Year
Double-Ridge Guide Horn Antenna(*2)	TR17206	ADVANTEST	C-29	2014/6	1 Year
RF Cable(*1)	SUCOFLEX104	SUHNER	C-67	2015/1	1 Year
RF Cable(*2)	SUCOFLEX102E	SUHNER	C-70	2014/11	1 Year

(*1) Radar Antenna and the cable

(*2) Monitor Antenna and the cable

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The Dynamic Frequency Selection(DFS) measurements were carried out in accordance with FCC Part 15.407(h) and KDB905462 D02 UNII DFS Compliance Procedures New Rules “ COMPLIANCE MEASUREMENT PROCEDURES FOR UNII DEVICES OPERATIONG IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION”.

7.7.3.1 DFS Detection Threshold and DFS Response Requirement

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2 and 3)
≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
Non-Occupancy Period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1.)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and 2.)
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3.)
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

7.7.3.2 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note1	See Note1
1	1	See KDB905462 D02		60%	40
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. For Short Pulse Radar Type 0, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4.

Long Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as follows:


- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

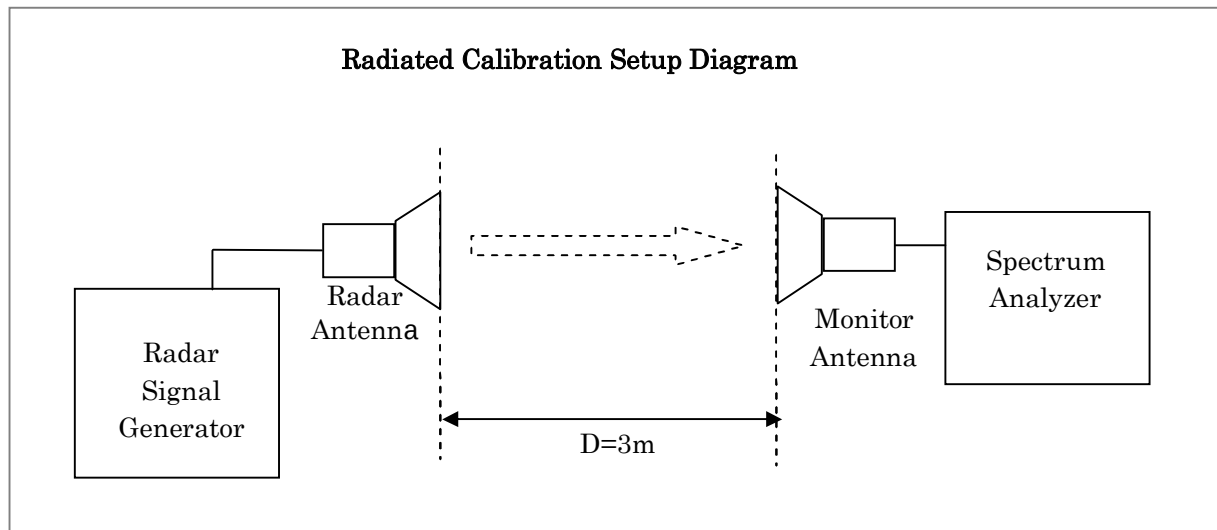7.7.3.3 Rader Waveform Calibration

The EUT is the client device without radar detection, then master device is a RDD. Therefore the radar test signal level is set at the Radar Detection Threshold Level of master device.

The Radar Detection Threshold Level is employed $-64\text{dBm} + 1\text{dB} = -63\text{ dBm}$ at the antenna port.

Where the antenna gain of master device is X dBi then the threshold level is corrected as

$-63 - X$ dBm (Rated output power and Antenna Gain of the master device is described in EUT Description).

The spectrum analyzer is connected to the monitor antenna via a coaxial cable. The antenna is set vertical polarization for testing. The reference level offset of a spectrum analyzer set to "Monitoring Antenna Gain – Cable loss". The Radar Signal Generator is set to CW output mode and the signal level is adjusted to $-63 - X$ dBm on the spectrum analyzer setting as below;

Frequency: Radar Signal Frequency


Span: Zero Span(Time Domain)

RBW/VBW: 3 MHz

Detection: Peak

The spectrum analyzer plots of the calibrated radar waveform on the Channel frequency is attached in clause 7.7.5.1 in this report.

7.7.3.4 Test Setup and Operation Radiated Method

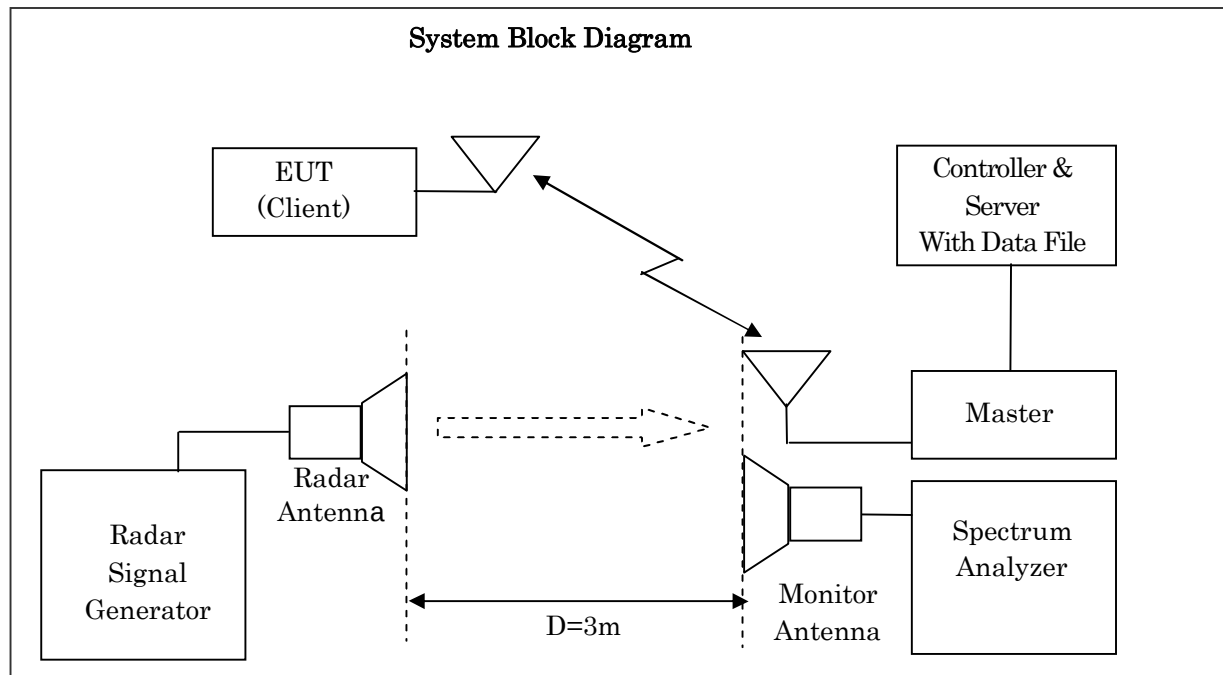

Support Equipment: The following support equipment was used for in this DFS testing

Item	Manufacturer	Model No.	Serial No.	FCC ID
Wireless Access Point	Cisco	AIR-AP1042N-A-K9	FTX1637E2NC	LDK102070
AC Adaptor for AP	Cisco	AA2548L	ALD0516GFDA	N/A
PC(Controller/Server)	HP Compaq	D330 uT	JPA42500TB	DoC

Used Test File and Displayed Traffic Level Adjustment:

The test is performed with the designated MPEG test file that is streamed from the access point to the client in full motion video mode using the media player with the V2.61 Codec package. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

By control PC, the radio link is established between the master and slave and the test file in saver(PC) is streamed via master(access point) to generate WLAN traffic.

The monitoring antenna is adjusted so that the WLAN traffic level on the spectrum analyzer is lower than the radar detection threshold level.

The spectrum analyzer plots of the slave(EUT) data traffic plot is attached in clause 7.7.5.2 and the nominal noise floor plots is attached in clause 7.7.5.3 in this report.

7.7.3.5 Description of EUT

Item	Specification
Operating Frequency(MHz)	5150 to 5250 / 5250 to 5350 / 5470 to 5725
Operating Mode of EUT	Client(Slave) Device without Radar Detection
FCC ID for Master Device(*1)	LDK102070 (Antenna Gain: 3.0 dBi)
Antenna Type of EUT	Inverted-L Type Antenna
Highest Power Level(EIRP)/ Antenna Gain of EUT	802.11a/n/ac ANT0/ANT1:11.5/11.0 dBm Max. 802.11n/ac(40 MHz BW) ANT0/ANT1:11.5/11.0 dBm Max. 802.11ac(80 MHz) ANT0/ANT1:11.5/11.0 dBm Max. Antenna Gain: 0 dBi
System Architecture	IEEE802.11 a/n/ac, IP based system
TPC Description	N/A(Not Required EIRP below 500 mW)
Data Rate/ Channel Bandwidth	Refer below table.
Power-on Cycle	N/A(No Channel Availability Check Function)

(*1) The rated output power of the master device is greater than 20dBm(EIRP), then the interference threshold level is employed -64 dBm. After correction for procedural adjustments, the radiated threshold level at the master device is $-64 + 1 - 3 \text{ dBi}(\text{Master antenna Gain}) = -66 \text{ dBm}$.

Data Rate/ Channel Bandwidth

IEEE802.11 a			IEEE802.11 n		
Modulation	Data Rate (Mbps)	Channel Bandwidth (MHz)	Modulation	Data Rate(Mbps)	
				Channel Bandwidth(MHz)	
				20	40
BPSK	6	20	BPSK	6.5	13.5
BPSK	9	20	QPSK	13.0	27.0
QPSK	12	20	QPSK	19.5	40.5
QPSK	18	20	16-QAM	26.0	54.0
16-QAM	24	20	16-QAM	39.0	81.0
16-QAM	36	20	64-QAM	52.0	108.0
64-QAM	48	20	64-QAM	58.5	121.5
64-QAM	54	20	64-QAM	65.0	135.0

IEEE802.11 ac			
Modulation	Data Rate(Mbps)		
	Channel Bandwidth(MHz)		
	20	40	80
BPSK	6.5	13.5	29.3
QPSK	13.0	27.0	58.5
QPSK	19.5	40.5	87.8
16-QAM	26.0	54.0	117.0
16-QAM	39.0	81.0	175.5
64-QAM	52.0	108.0	234.0
64-QAM	58.5	121.5	263.3
64-QAM	65.0	135.0	292.5
256-QAM	78.0	162.0	351.0
256-QAM	N/A	180.0	390.0

7.7.3.6 Deviation to the procedures and equipment from the standards:



There is no deviation from FCC Rule and KDB905462 D02.

7.7.4 Test Data



Test Date : March 14, 2015

Temp.: 21°C, Humi: 35%



7.7.4.1 Radar Waveform Calibration Results (Type 0 Short Pulse)

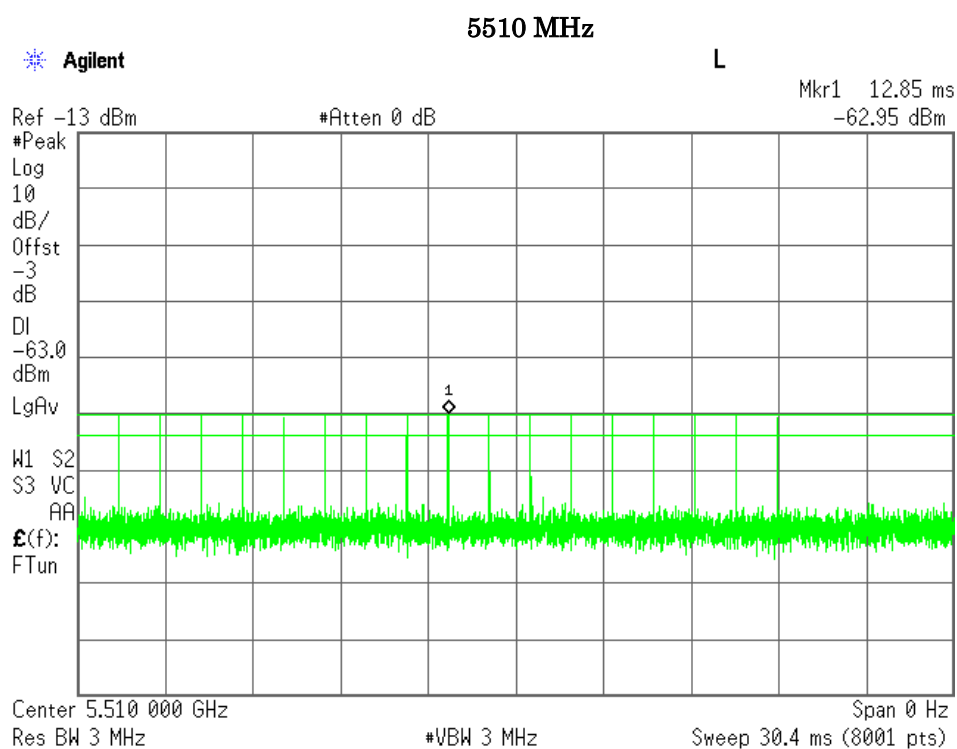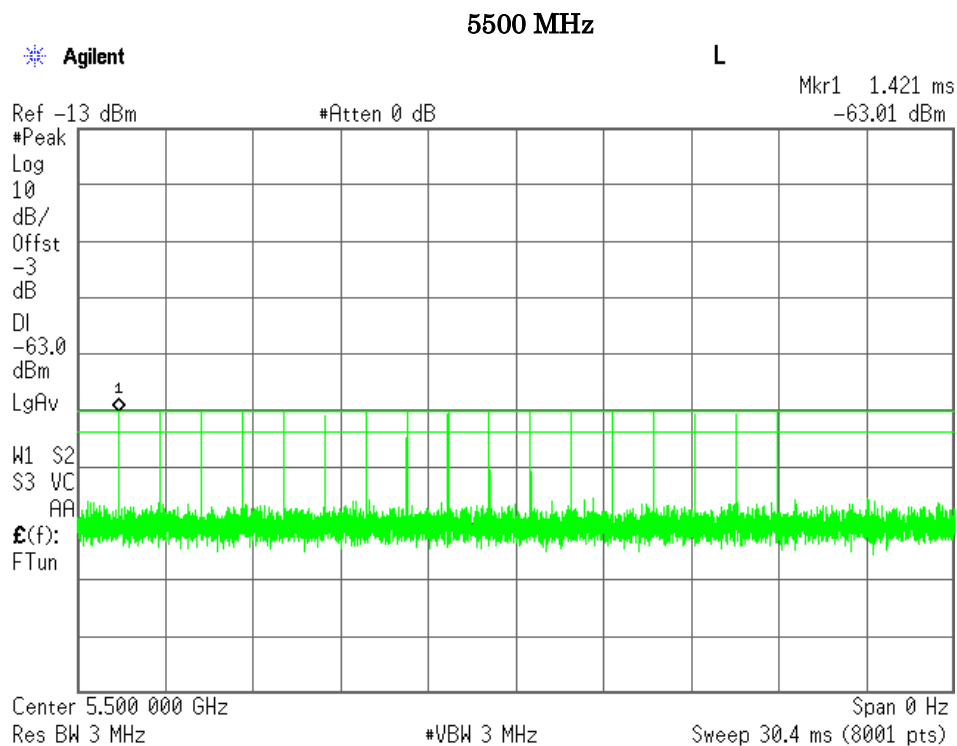

7.7.4.2 EUT (Slave) Traffic Plots

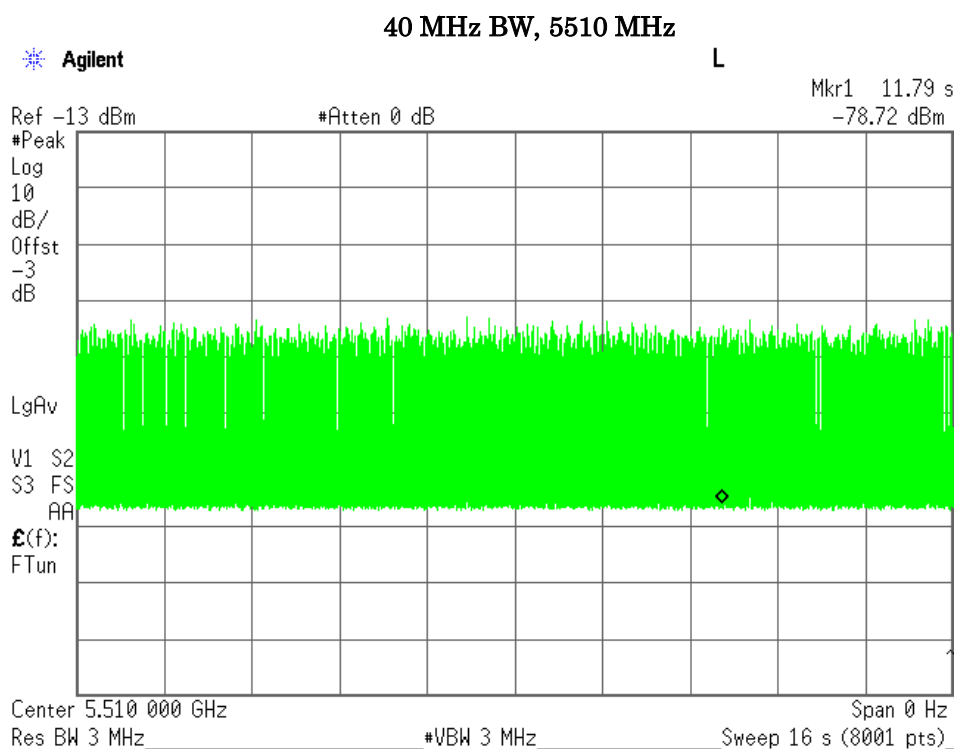
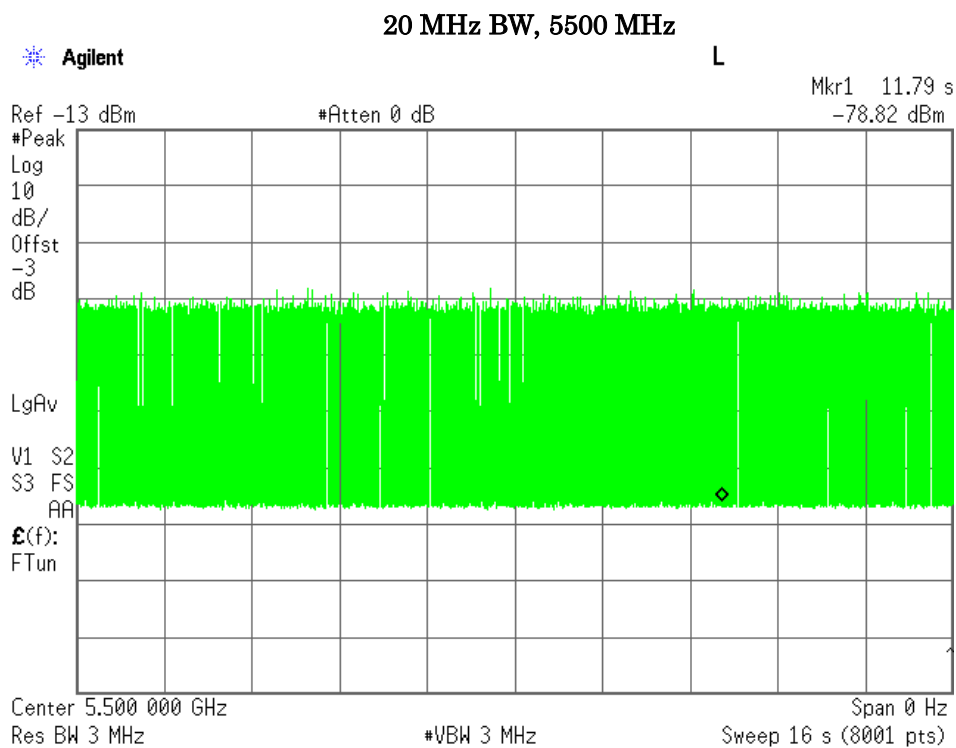


7.7.4.3 No Traffic (Noise Floor) Plots

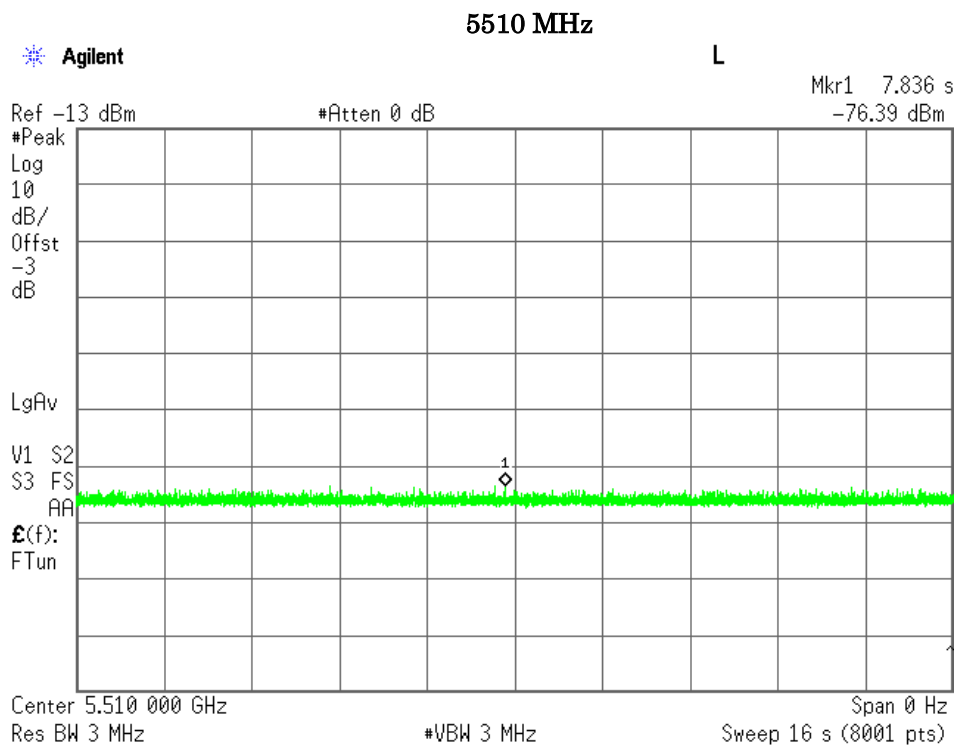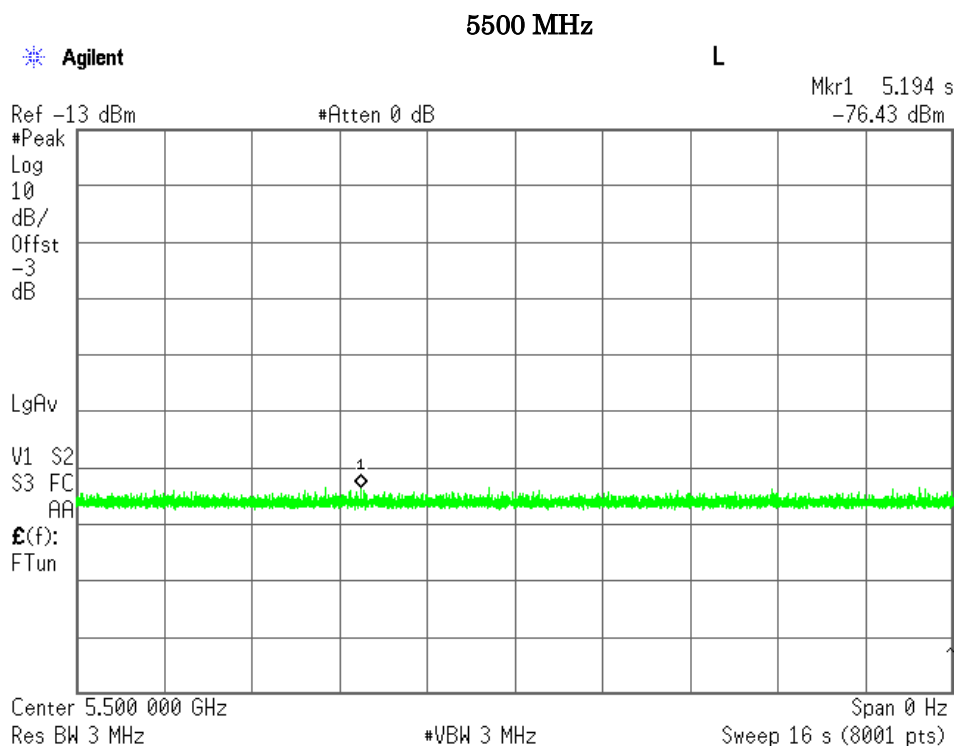

7.7.4.4 Channel Move Time

The channel move time is measured using delta-marker function of the spectrum analyzer. The reference marker is adjusted at the end of radar pulse and the delta marker is adjusted at the end the WLAN transmission. The displayed delta value is the result of move time. It shall be within the 10 seconds. The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz and CH.102(5510 MHz)/ 40 MHz.

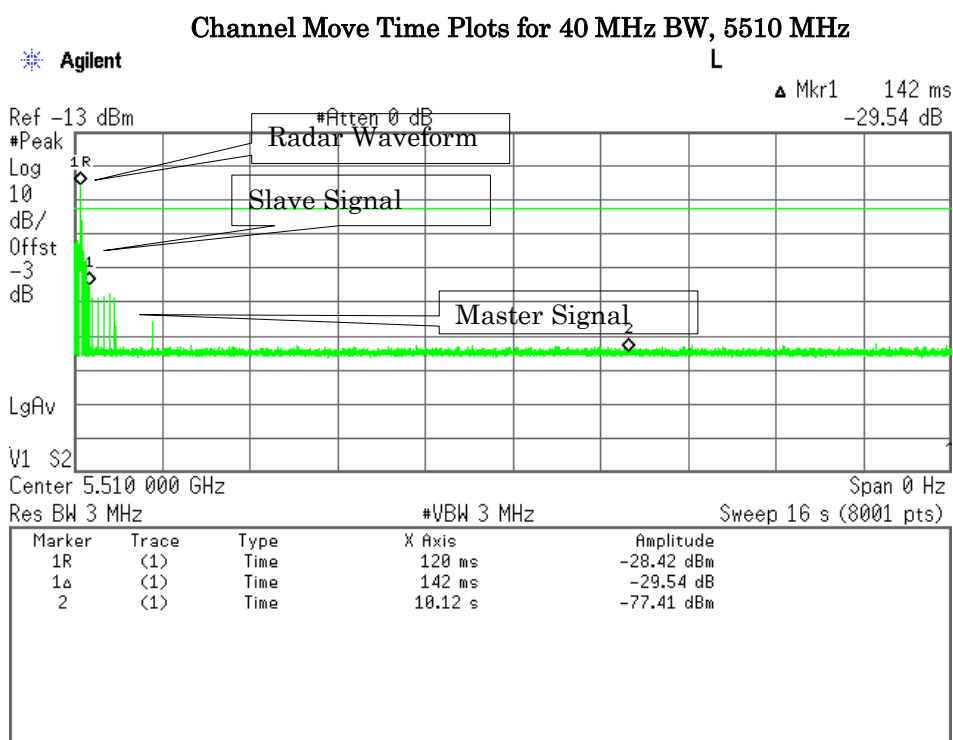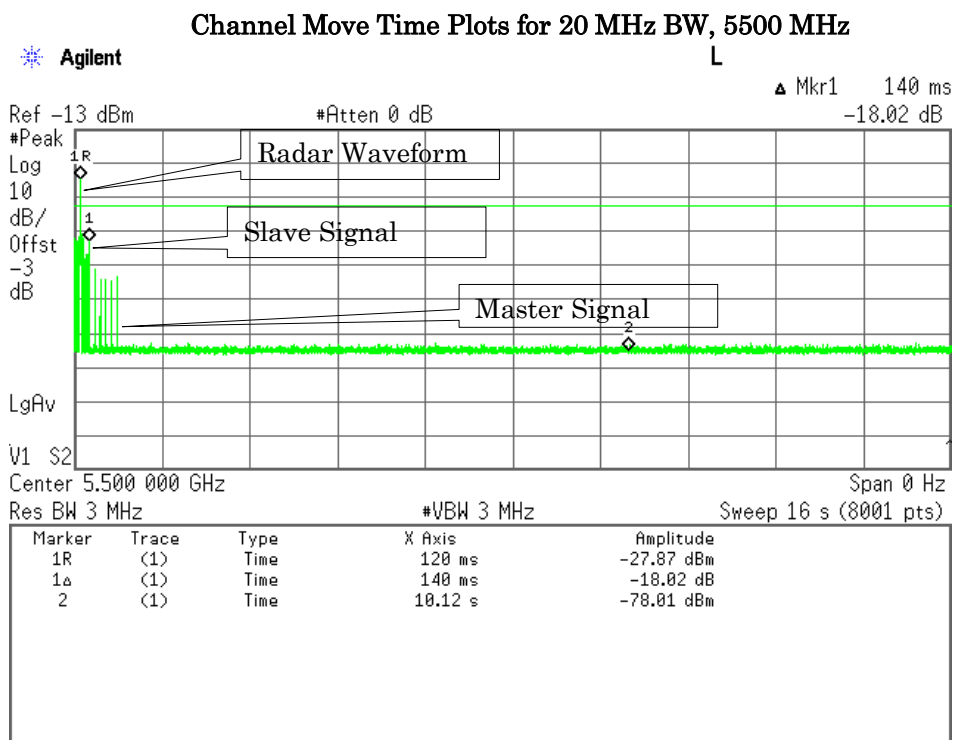

7.7.4.5 Channel Closing Transmission Time

The aggregate channel closing transmission time is calculated as follows;

D is the dwell time per spectrum analyzer sampling bin.

S is the sweep time.

B is the number of spectrum analyzer sampling bin.

N is the number of spectrum analyzer sampling bins showing a UNII transmission(intermittent control signal).

$$\text{Channel Closing Time} = D * N = S / B * N$$

The observation period over which the aggregate transmission time is calculated begins at (the reference marker + 200 msec.) and end on earlier than (the reference marker + 10 sec.).

The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz BW and CH.102(5510 MHz)/ 40 MHz BW.

Test Results


Channel	Frequency (MHz)	Mode	Sweep Time(S) (msec)	(B)	(N)	Channel Closing Time (msec)
100	5500	20 MHz BW	1000	500	0	0
140	5510	40 MHz BW	1000	500	0	0

The test result (Channel Closing Time) is calculated as follows;


For 100 channel (5500 MHz)

$$\text{Channel Closing Time} = D * N = S / B * N = 1000 / 500 * 0 = 0 \text{ msec}$$

Channel Closing Transmission Time Plots for 20 MHz, 5500 MHz

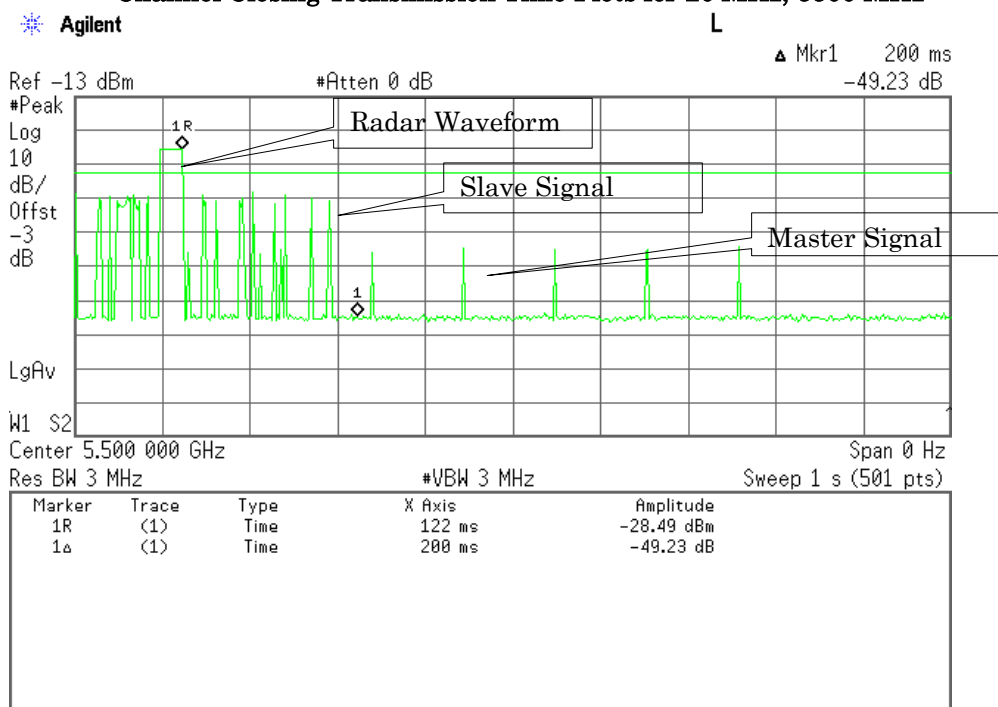

Channel Closing Transmission Time Plots for 40 MHz, 5510 MHz

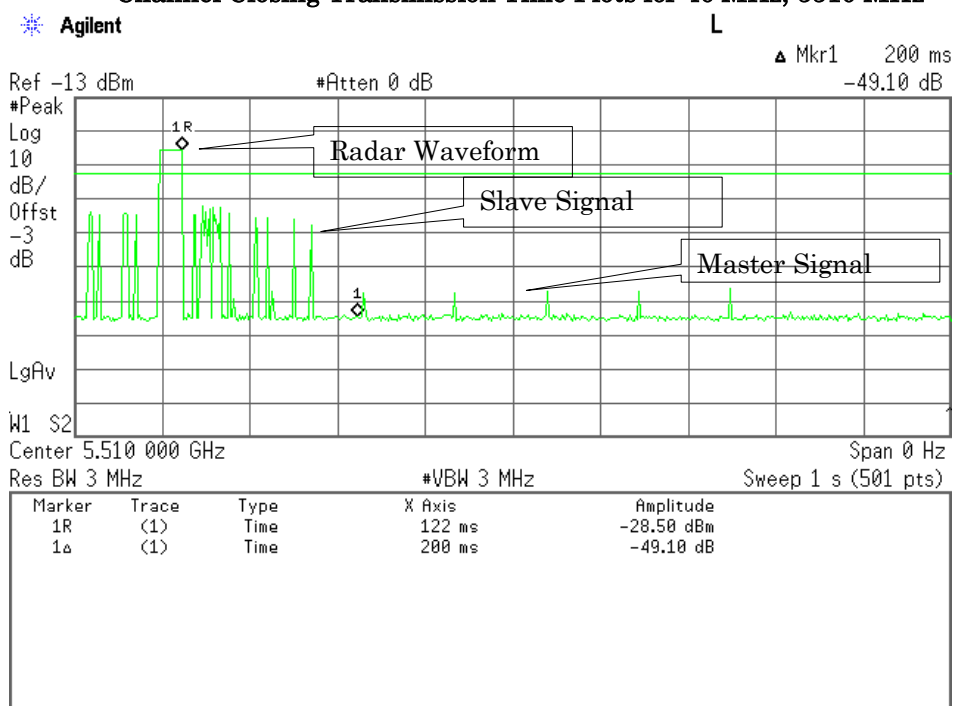


7.7.4.6 Non-Occupancy Period

During the 30 minutes observation time, EUT did not make any transmissions on a channel.

The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz and CH.102(5510 MHz)/ 40 MHz.

Non-Occupancy Period Plots for 20 MHz, 5500 MHz

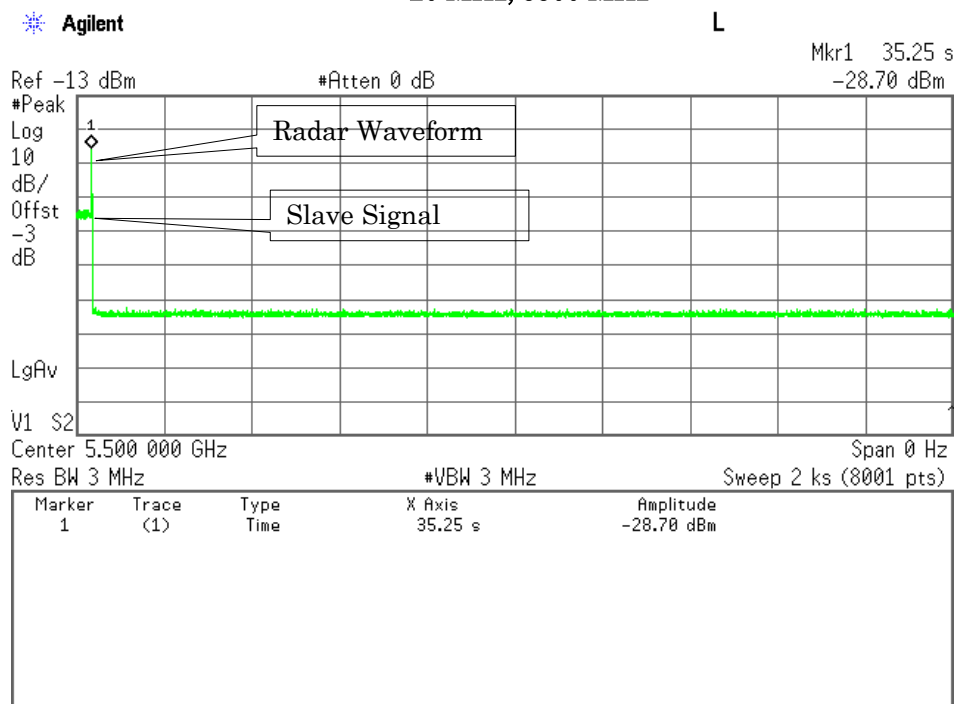

40 MHz, 5510 MHz

