

TEST REPORT

FCC ID.	2A525AWR103-WX
Test Report No.	TCT250523E032
Date of issue	Jul. 03, 2025
Testing laboratory	SHENZHEN TONGCE TESTING LAB
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China
Applicant's name	Jiangsu Zhong Heng Pet Articles Joint-stock CO., LTD
Address	NO.1388 Century Avenue, Yandu District, Yancheng City, Jiangsu, China
Manufacturer's name	Jiangsu Zhong Heng Pet Articles Joint-stock CO., LTD
Address	NO.1388 Century Avenue, Yandu District, Yancheng City, Jiangsu, China
Standard(s)	FCC CFR Title 47 Part 15 Subpart C Section 15.249 ANSI C63.10:2020
Product Name	Cordless Pet Water Fountain
Trade Mark	N/A
Model/Type reference	AWR103-WX, AWR103-AP, 16113-AP, AWR103-AS, 16113-AS, AWR103-AS-R, 16113-AS-R, AWR103-BP, 16114-BP, AWR103-BS, 16114-BS, AWR103-BS-R, 16114-BS-R, 16125-WX, YSJ-D378
Rating(s)	Rechargeable Li-ion Battery DC 3.7V
Date of receipt of test item	May 23, 2025
Date (s) of performance of test	May 23, 2025 ~ Jul. 03, 2025
Tested by (+signature)	Rleo LIU
Check by (+signature)	Beryl ZHAO
Approved by (+signature) :	Tomsin

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Test Result Summary	4
3. General Information.....	5
3.1. Test Environment and Mode.....	5
3.2. Description of Support Units.....	5
4. Facilities and Accreditations	6
4.1. Facilities	6
4.2. Location	6
5. Measurement Uncertainty	6
6. Test Results and Measurement Data	7
6.1. Antenna Requirement	7
6.2. Conducted Emission.....	8
6.3. Radiated Emission Measurement	12
6.4. 20dB Occupied Bandwidth	23

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. General Product Information

1.1. EUT description

Product Name.....	Cordless Pet Water Fountain
Model/Type reference.....	AWR103-WX
Sample Number.....	TCT250523E032-0101
Operation Frequency	5725MHz~5875MHz
Test Frequency	5733.98MHz, 5787.55MHz, 5852.70MHz,
Modulation Technology	GFSK
Antenna Type.....	Flat Antenna
Antenna Gain.....	1.44dBi
Rating(s)	Rechargeable Li-ion Battery DC 3.7V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	AWR103-WX	<input checked="" type="checkbox"/>
Other models	AWR103-AP, 16113-AP, AWR103-AS, 16113-AS, AWR103-AS-R, 16113-AS-R, AWR103-BP, 16114-BP, AWR103-BS, 16114-BS, AWR103-BS-R, 16114-BS-R, 16125-WX, YSJ-D378	<input type="checkbox"/>

Note: AWR103-WX is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of AWR103-WX can represent the remaining models.

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Field Strength of Fundamental	§15.249 (a)	PASS
Spurious Emissions	§15.249 (a) (d)/ §15.209	PASS
Band Edge	§15.249 (d)/ §15.205	PASS
20dB Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test Environment and Mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	20.8 °C	20.8 °C
Humidity:	50 % RH	50 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery.	
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case (Z axis) are shown in Test Results of the following pages.		

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	EP-TA200	R37M4PR7QD4SE3	/	SAMSUNG

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

5. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

6. Test Results and Measurement Data

6.1. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The EUT antenna is flat antenna which permanently attached, and the best case gain of the antenna is 1.44dBi.	
	Antenna

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p style="text-align: center;">Reference Plane</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.7m</p>														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement. 														
Test Result:	PASS														


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 27, 2024	Jun. 26, 2025
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 21, 2025	Jan. 20, 2026
Attenuator	N/A	10dB	164080	Jun. 27, 2024	Jun. 26, 2025
Line-5	TCT	CE-05	/	Jun. 27, 2024	Jun. 26, 2025
EMI Test Software	EZ_EMC	EMEC-3A1	1.1.4.2	/	/

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

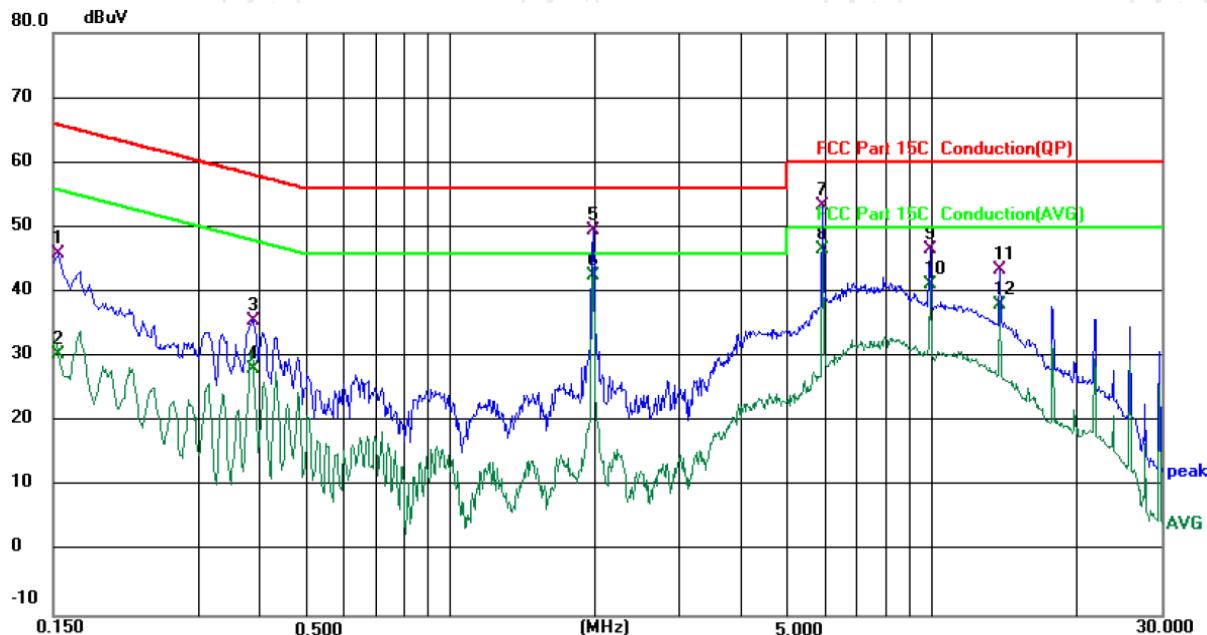

Site 844 Shielding Room Phase: **L1** Temperature: 20.8 (°C) Humidity: 50 %

Limit: FCC Part 15C Conduction(QP) Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB μ V	dB	dB μ V	dB μ V	dB		
1		0.1539	36.03	9.96	45.99	65.79	-19.80	QP	
2		0.1539	20.32	9.96	30.28	55.79	-25.51	AVG	
3		0.3899	25.75	9.92	35.67	58.07	-22.40	QP	
4		0.3899	18.21	9.92	28.13	48.07	-19.94	AVG	
5		1.9818	39.51	10.01	49.52	56.00	-6.48	QP	
6	*	1.9818	32.60	10.01	42.61	46.00	-3.39	AVG	
7		5.9458	43.12	10.17	53.29	60.00	-6.71	QP	
8		5.9458	36.34	10.17	46.51	50.00	-3.49	AVG	
9		9.9220	36.28	10.28	46.56	60.00	-13.44	QP	
10		9.9220	30.83	10.28	41.11	50.00	-8.89	AVG	
11		13.8780	32.96	10.39	43.35	60.00	-16.65	QP	
12		13.8780	27.76	10.39	38.15	50.00	-11.85	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

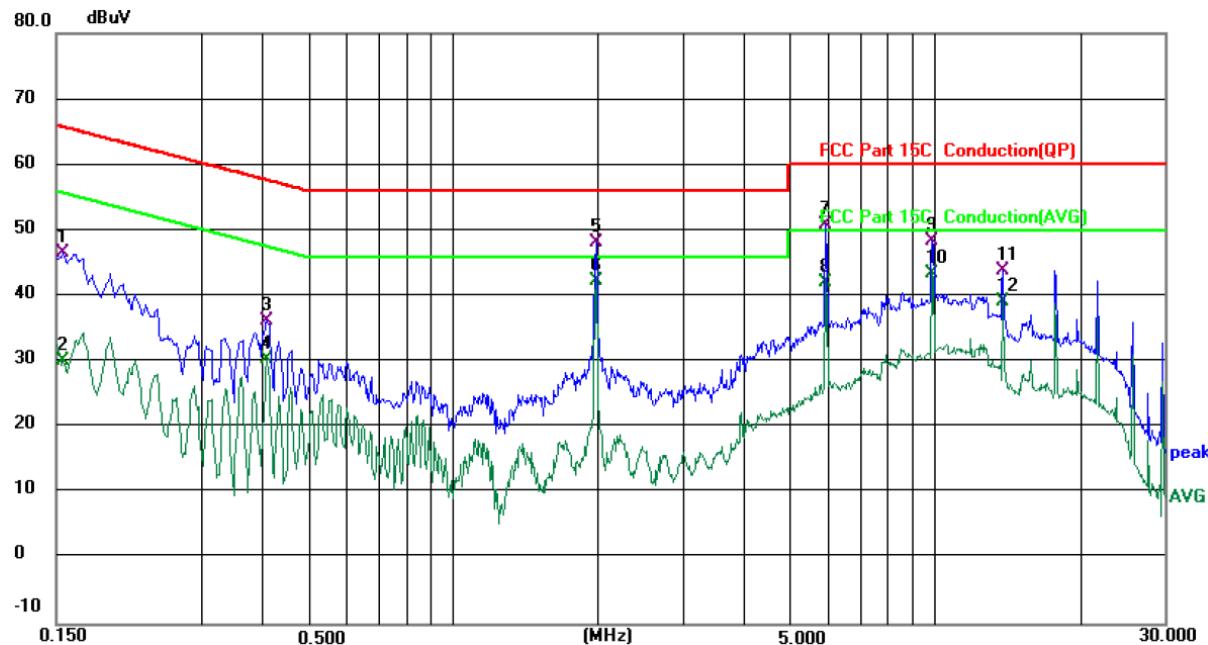

Site 844 Shielding Room Phase: **N** Temperature: 20.8 (°C) Humidity: 50 %

Limit: FCC Part 15C Conduction(QP) Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	0.1547	36.56	9.94	46.50	65.74	-19.24	QP		
2	0.1547	20.16	9.94	30.10	55.74	-25.64	AVG		
3	0.4100	26.20	9.94	36.14	57.65	-21.51	QP		
4	0.4100	20.35	9.94	30.29	47.65	-17.36	AVG		
5	1.9818	38.18	10.02	48.20	56.00	-7.80	QP		
6 *	1.9818	32.40	10.02	42.42	46.00	-3.58	AVG		
7	5.9580	40.68	10.18	50.86	60.00	-9.14	QP		
8	5.9580	31.92	10.18	42.10	50.00	-7.90	AVG		
9	9.9100	38.08	10.34	48.42	60.00	-11.58	QP		
10	9.9100	33.08	10.34	43.42	50.00	-6.58	AVG		
11	13.8780	33.55	10.44	43.99	60.00	-16.01	QP		
12	13.8780	28.64	10.44	39.08	50.00	-10.92	AVG		

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2: Measurements were conducted in all channels (high, middle, low), and the worst case (Middle channel) was submitted only.


6.3. Radiated Emission Measurement

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:2020								
Frequency Range:	9 kHz to 25 GHz								
Measurement Distance:	3 m								
Antenna Polarization:	Horizontal & Vertical								
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark				
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value				
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value				
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit(Field strength of the fundamental signal):	Frequency	Limit (dBuV/m @3m)		Remark					
	2400MHz-2483.5MHz	94.00		Average Value					
		114.00		Peak Value					
Limit(Spurious Emissions):	Frequency	Limit (dBuV/m @3m)		Remark					
	0.009-0.490	2400/F(KHz)		Quasi-peak Value					
	0.490-1.705	24000/F(KHz)		Quasi-peak Value					
	1.705-30	30		Quasi-peak Value					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Limit (band edge):	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.								
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter chamber in below 1GHz, 0.1m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 								


4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

30MHz to 1GHz

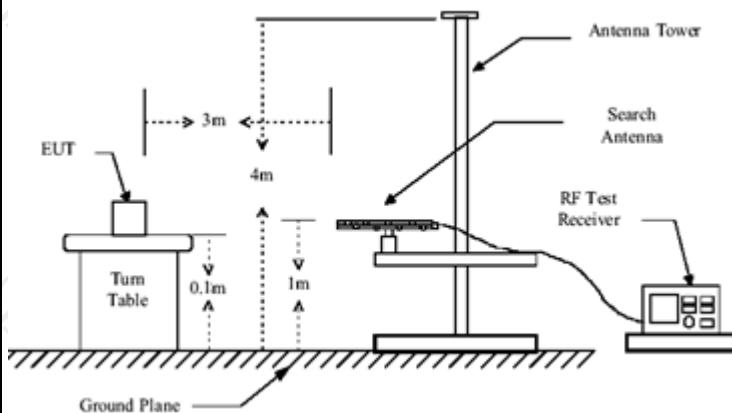

Above 1GHz

(The diagram below shows the test setup that is utilized to make the measurements for emission from 1GHz to the tenth harmonic of the highest fundamental frequency or to 40GHz emissions, whichever is lower.)

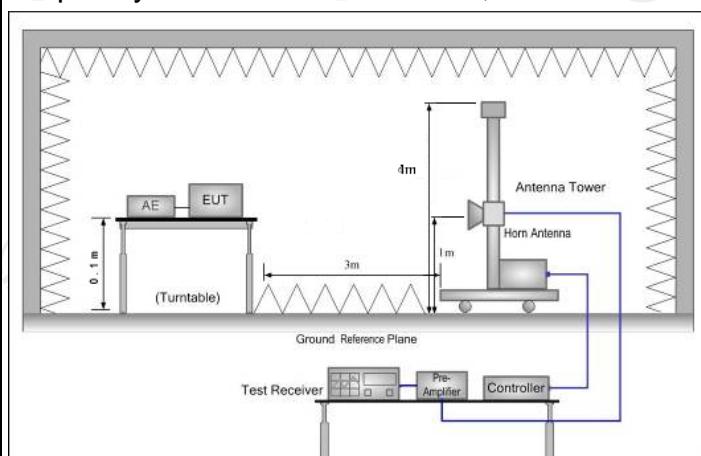

Test results:

PASS

6.3.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 27, 2024	Jun. 26, 2025
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024	Jun. 26, 2025
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 27, 2024	Jun. 26, 2025
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 23, 2025	Jan. 22, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2024	Jun. 26, 2025
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EMCA	FA-03A2 RE+	1.1.4.2	/	/

6.3.3. Test Data

Field Strength of Fundamental

Frequency (MHz)	Emission PK (dBuV/m)	Horizontal /Vertical	Limits PK (dBuV/m)	Margin (dB)
5733.98	87.30	H	114	-26.70
5733.98	85.44	V	114	-28.56
5787.55	88.59	H	114	-25.41
5787.55	88.64	V	114	-25.36
5852.70	85.33	H	114	-28.67
5852.70	86.06	V	114	-27.94

Frequency (MHz)	Emission AV (dBuV/m)	Horizontal /Vertical	Limits AV (dBuV/m)	Margin (dB)
5733.98	86.33	H	94	-7.67
5733.98	84.56	V	94	-9.44
5787.55	69.96	H	94	-24.04
5787.55	70.05	V	94	-23.95
5852.70	78.58	H	94	-15.42
5852.70	79.52	V	94	-14.48

Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--


Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

3. For fundamental frequency, RBW >20dB BW , VBW>=RBW, PK detector is for PK value, RMS detector is for AV value.

Frequency Range (30MHz-1GHz)

Horizontal:

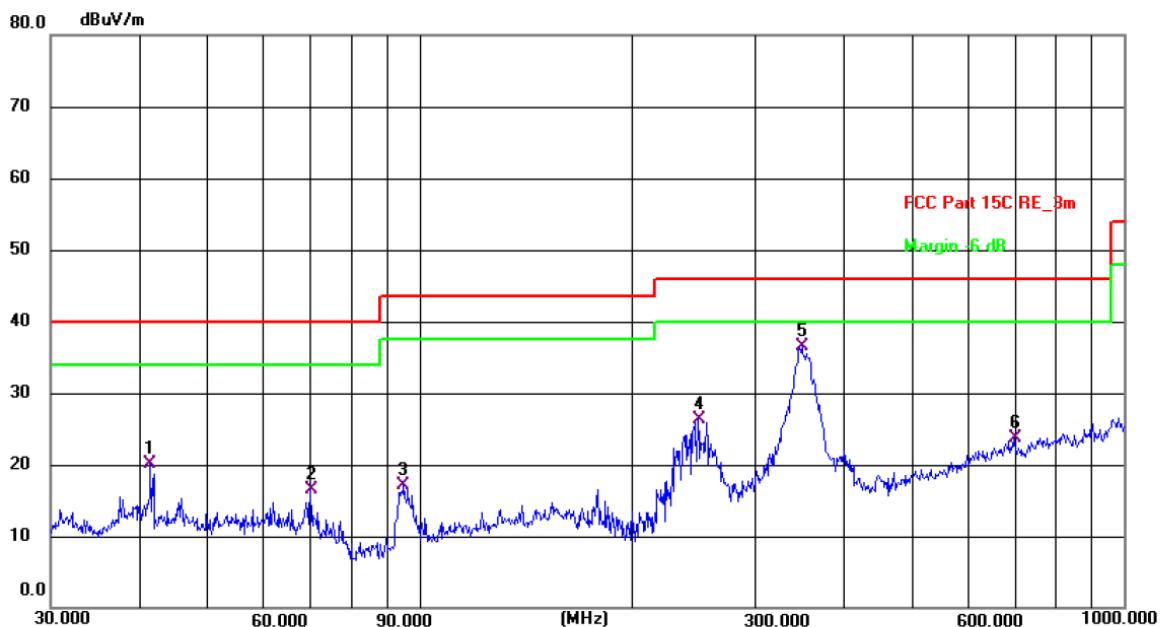

Site 3m Anechoic Chamber2

 Polarization: **Horizontal**


Temperature: 23.6(C) Humidity: 49 %

Limit: FCC Part 15C RE_3m

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	41.5670	38.54	-18.44	20.10	40.00	-19.90	QP	P	
2	70.0902	36.77	-20.36	16.41	40.00	-23.59	QP	P	
3	95.0929	39.03	-22.01	17.02	43.50	-26.48	QP	P	
4	248.5519	45.85	-19.57	26.28	46.00	-19.72	QP	P	
5 *	349.2500	53.31	-16.88	36.43	46.00	-9.57	QP	P	
6	699.3045	32.16	-8.55	23.61	46.00	-22.39	QP	P	

Vertical:

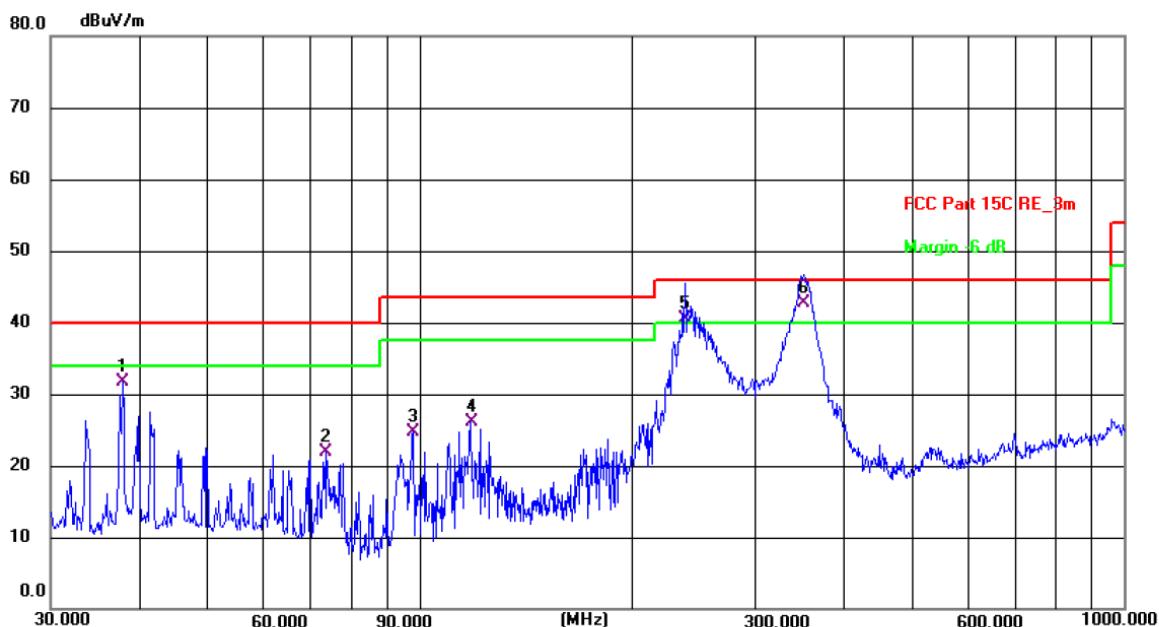

Site 3m Anechoic Chamber2

Polarization: **Vertical**

Temperature: 23.6(C) Humidity: 49 %

Limit: FCC Part 15C RE_3m

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	37.9448	50.48	-18.80	31.68	40.00	-8.32	QP	P	
2	73.8756	42.78	-20.81	21.97	40.00	-18.03	QP	P	
3	98.1418	46.11	-21.50	24.61	43.50	-18.89	QP	P	
4	118.1861	45.78	-19.60	26.18	43.50	-17.32	QP	P	
5 !	238.3101	60.52	-20.05	40.47	46.00	-5.53	QP	P	
6 *	351.7078	59.39	-16.74	42.65	46.00	-3.35	QP	P	

Note: Measurements were conducted in all channels (high, middle, low), and the worst case (Middle channel) was submitted only.



Above 1GHz

Low channel: 5733.98MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11467.96	H	43.13	---	2.48	45.61	---	74	54	-8.39
17201.94	H	38.25	---	6.50	44.75	---	74	54	-9.25
---	---	---	---	---	---	---	---	---	---
11467.96	V	42.62	---	2.48	45.10	---	74	54	-8.90
17201.94	V	38.94	---	6.50	45.44	---	74	54	-8.56
---	---	---	---	---	---	---	---	---	---

Middle channel: 5787.55MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11575.10	H	44.61	---	2.4	47.01	---	74	54	-6.99
17362.65	H	38.03	---	7.15	45.18	---	74	54	-8.82
---	---	---	---	---	---	---	---	---	---
11575.10	V	44.57	---	2.4	46.97	---	74	54	-7.03
17362.65	V	37.60	---	7.15	44.75	---	74	54	-9.25
---	---	---	---	---	---	---	---	---	---

High channel: 5852.70MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11705.40	H	44.81	---	2.41	47.22	---	74	54	-6.78
17558.10	H	37.04	---	7.41	44.45	---	74	54	-9.55
---	---	---	---	---	---	---	---	---	---
11705.40	V	45.29	---	2.41	47.70	---	74	54	-6.30
17558.10	V	38.81	---	7.41	46.22	---	74	54	-7.78
---	---	---	---	---	---	---	---	---	---


Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Band Edge Requirement

Lowest channel 5733.98:

Horizontal:

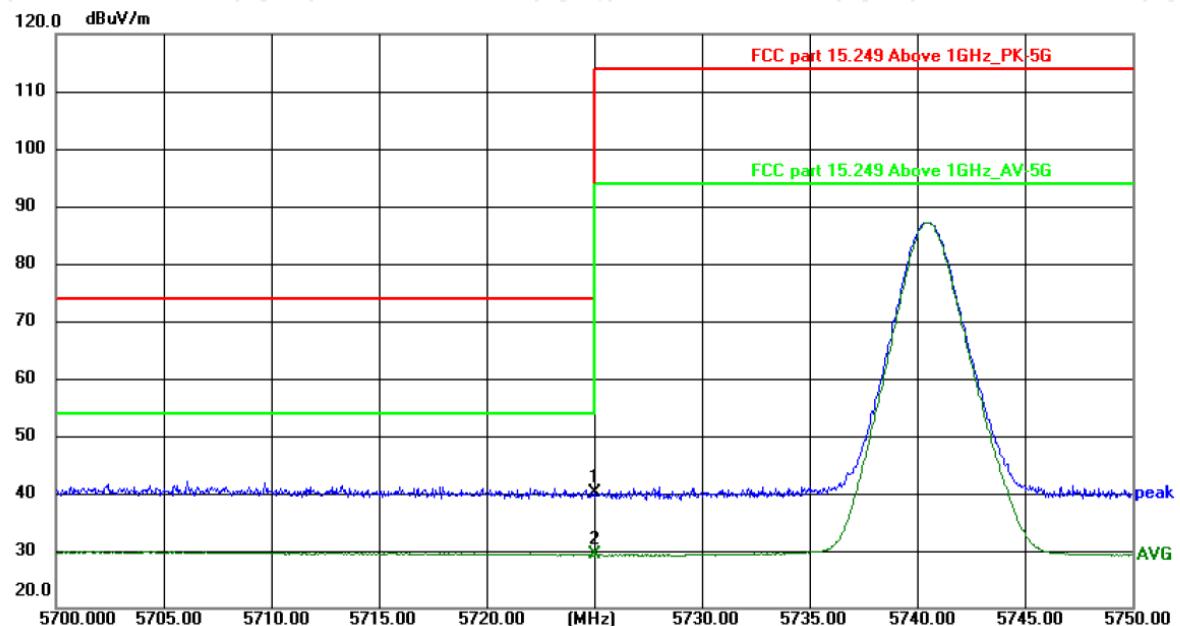

Site: 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 21.3(°C)


Humidity: 46 %

Limit: FCC part 15.249 Above 1GHz_PK-5G

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5725.000	47.08	-7.02	40.06	74.00	-33.94	peak	P	
2 *	5725.000	36.34	-7.02	29.32	54.00	-24.68	AVG	P	

Vertical:

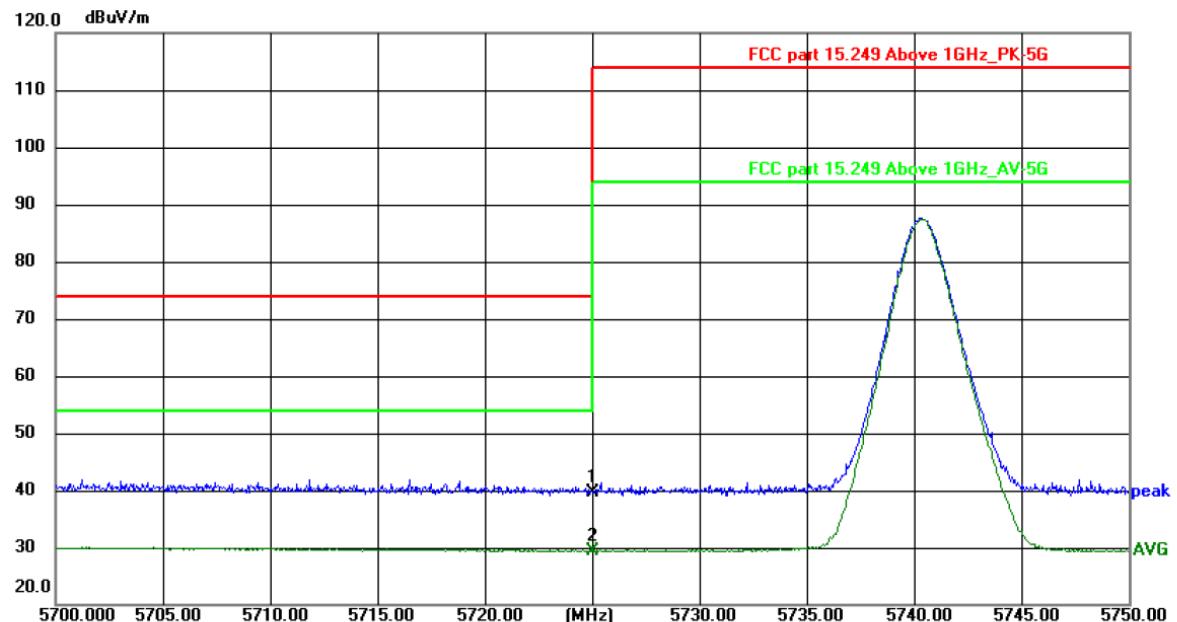

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 21.3(°C)

Humidity: 46 %


Limit: FCC part 15.249 Above 1GHz_PK-5G

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5725.000	46.66	-7.02	39.64	74.00	-34.36	peak	P	
2 *	5725.000	36.44	-7.02	29.42	54.00	-24.58	AVG	P	

Highest channel 5852.70:

Horizontal:

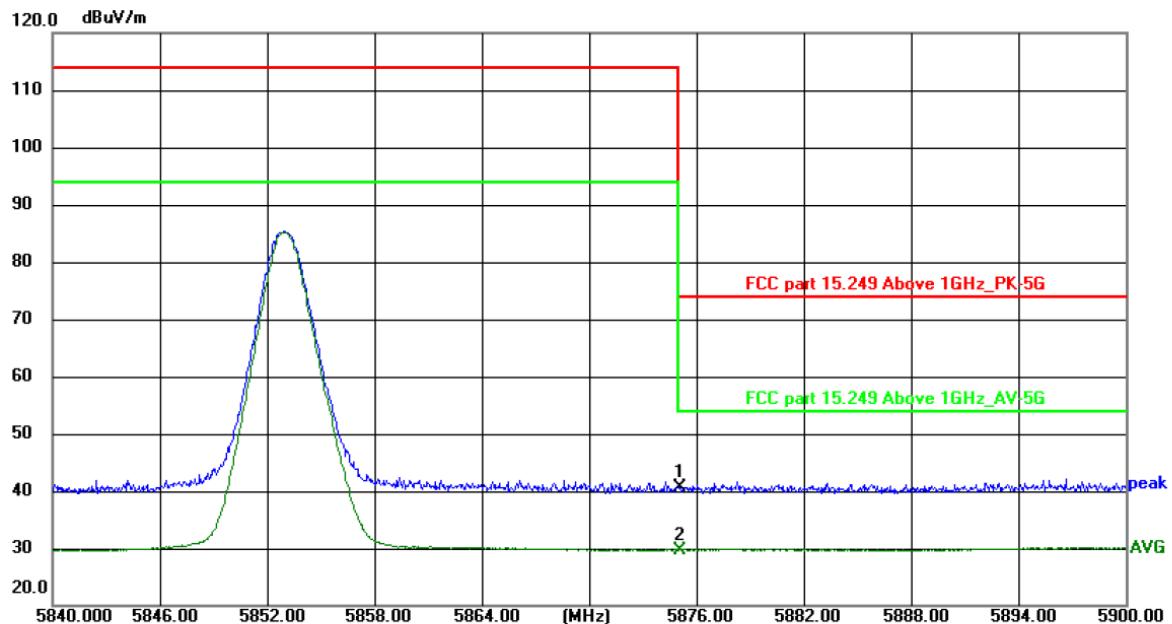

Site: 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 21.3(°C)


Humidity: 46 %

Limit: FCC part 15.249 Above 1GHz_PK-5G

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5875.000	47.29	-6.65	40.64	74.00	-33.36	peak	P	
2 *	5875.000	36.40	-6.65	29.75	54.00	-24.25	AVG	P	

Vertical:

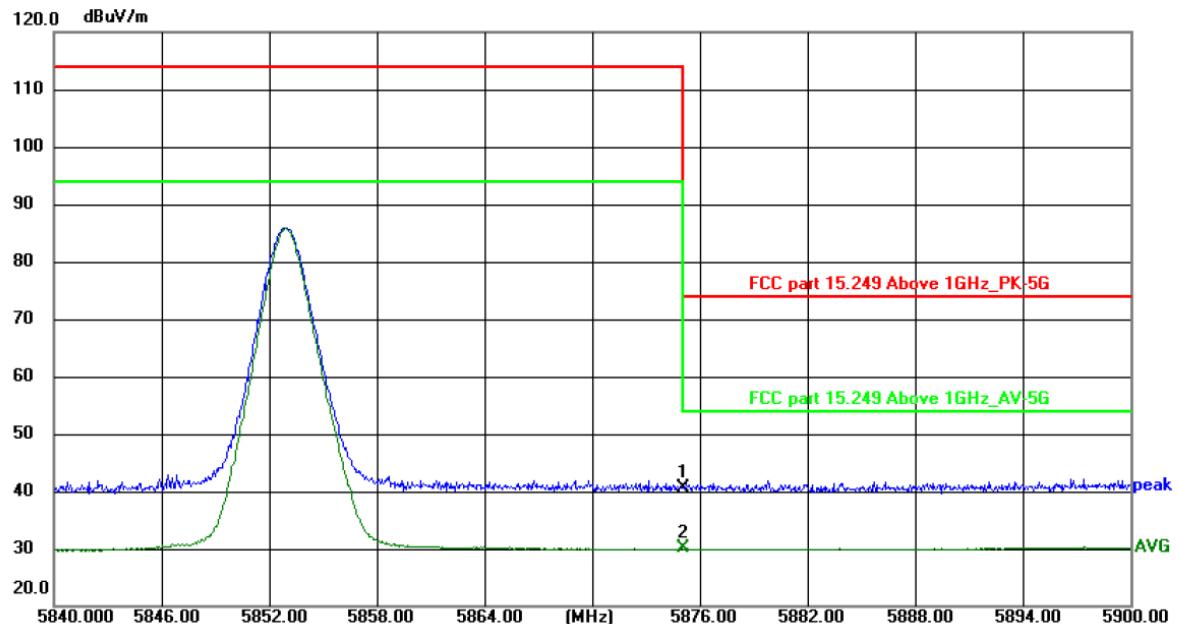

Site: 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 21.3(°C)

Humidity: 46 %


Limit: FCC part 15.249 Above 1GHz_PK-5G

Power:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5875.000	47.30	-6.65	40.65	74.00	-33.35	peak	P	
2 *	5875.000	36.72	-6.65	30.07	54.00	-23.93	AVG	P	

6.4. 20dB Occupied Bandwidth

6.4.1. Test Specification

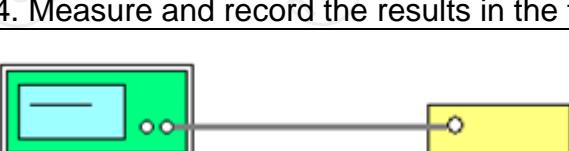Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2020
Limit:	N/A
	<ol style="list-style-type: none">1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.2. Set to the maximum power setting and enable the EUT transmit continuously.3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. The spectrum analyser center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two times and five times the OBW. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video Bandwidth (VBW) shall be at least three times RBW, unless otherwise specified by the applicable requirement. Sweep = auto; Detector function = peak; Trace = max hold.4. Measure and record the results in the test report.
Test setup:	
Test Mode:	Transmitting mode with modulation
Test results:	PASS

6.4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 27, 2024	Jun. 26, 2025

6.4.3. Test data

Test Channel	20dB Occupy Bandwidth (kHz)	Limit	Conclusion
Lowest	70.45	---	PASS
Middle	68.60	---	PASS
Highest	61.93	---	PASS

Test plots as follows:

Lowest channel



Middle channel



Highest channel



Appendix B: Photographs of Test Setup

Please refer to document Appendix No.: TCT250523E032-A

Appendix C: Photographs of EUT

Please refer to document Appendix No.: TCT250523E032-B & TCT250523E032-C

*******END OF REPORT*******