

## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

### **Duty Cycle**

| Test Mode      | Frequency (MHz) | Duty Cycle (%) | Correction Factor(dB) |
|----------------|-----------------|----------------|-----------------------|
| 802.11a        | 5745            | 98.92          | 0.05                  |
| 802.11n HT20   | 5745            | 98.85          | 0.05                  |
| 802.11n HT40   | 5755            | 93.72          | 0.28                  |
| 802.11ac VHT20 | 5745            | 98.78          | 0.05                  |
| 802.11ac VHT40 | 5755            | 97.90          | 0.09                  |
| 802.11ac VHT80 | 5775            | 95.68          | 0.19                  |

## Output Power NII3

| Mode        | Tones/<br>RUIndex | Freq<br>(MHz) | Ant   | Conducted average<br>power output(dBm) | EIRP<br>(dBm) |
|-------------|-------------------|---------------|-------|--|---------------|
| 802.11a     | NA                | 5720          | Ant7  | 14.53                                  | 13.33         |
|             |                   | 5745          | Ant7  | 14.82                                  | 13.62         |
|             |                   | 5785          | Ant7  | 14.54                                  | 13.34         |
|             |                   | 5825          | Ant7  | 14.37                                  | 13.17         |
| 802.11n20M  |                   | 5720          | Ant7  | 14.41                                  | 13.21         |
|             |                   | 5745          | Ant7  | 14.66                                  | 13.46         |
|             |                   | 5785          | Ant7  | 14.36                                  | 13.16         |
|             |                   | 5825          | Ant7  | 14.20                                  | 13.00         |
| 802.11n40M  |                   | 5710          | Ant7  | 14.61                                  | 13.41         |
|             |                   | 5755          | Ant7  | 14.70                                  | 13.50         |
|             |                   | 5795          | Ant7  | 14.43                                  | 13.23         |
| 802.11ac20M |                   | 5720          | Ant7  | 14.36                                  | 13.16         |
|             |                   | 5745          | Ant7  | 14.73                                  | 13.53         |
|             |                   | 5785          | Ant7  | 14.41                                  | 13.21         |
|             |                   | 5825          | Ant7  | 14.32                                  | 13.12         |
| 802.11ac40M |                   | 5710          | Ant7  | 14.56                                  | 13.36         |
|             | 5755              | Ant7          | 14.85 | 13.65                                  |               |
|             | 5795              | Ant7          | 14.61 | 13.41                                  |               |
| 802.11ac80M | 5690              | Ant7          | 14.34 | 13.14                                  |               |
|             | 5775              | Ant7          | 14.36 | 13.16                                  |               |

### Emission Bandwidth

Offset 11.34dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 0.84dB

Test Mode:802.11a

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5720                    | Ant7 | 20.60                |
| 5745                    | Ant7 | 21.70                |
| 5785                    | Ant7 | 19.00                |
| 5825                    | Ant7 | 20.40                |

Test Mode:802.11a Ant7



Test Mode:802.11a Ant7



Test Mode:802.11a Ant7



Test Mode:802.11a Ant7



Test Mode:802. 11n HT20

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5720                    | Ant7 | 21.13                |
| 5745                    | Ant7 | 23.14                |
| 5785                    | Ant7 | 20.78                |
| 5825                    | Ant7 | 21.22                |

Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT40

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5710                    | Ant7 | 39.65                |
| 5755                    | Ant7 | 40.19                |
| 5795                    | Ant7 | 40.10                |

Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11ac VHT20

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5720                    | Ant7 | 22.66                |
| 5745                    | Ant7 | 21.82                |
| 5785                    | Ant7 | 19.94                |
| 5825                    | Ant7 | 22.69                |

Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT40

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5710                    | Ant7 | 39.58                |
| 5755                    | Ant7 | 39.71                |
| 5795                    | Ant7 | 40.32                |

Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT40 Ant7




Test Mode:802. 11ac VHT80

| Carrier frequency (MHz) | Ant  | 26dB Bandwidth (MHz) |
|-------------------------|------|----------------------|
| 5690                    | Ant7 | 79.67                |
| 5775                    | Ant7 | 79.38                |

Test Mode:802. 11ac VHT80 Ant7



Test Mode:802. 11ac VHT80 Ant7

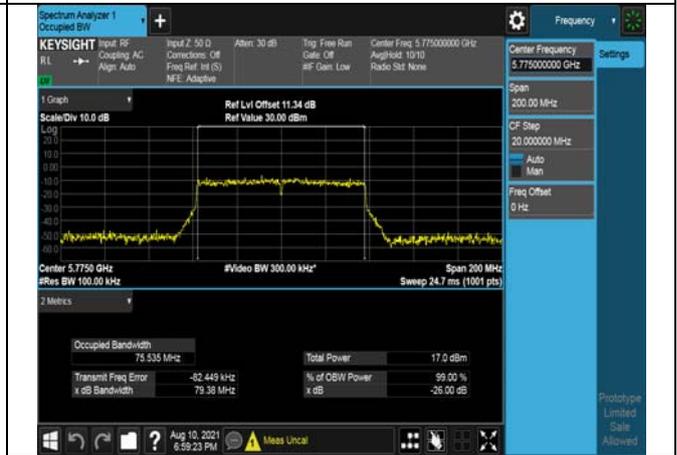

### Occupied Bandwidth

Offset 11.34dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 0.84dB

Test Mode:802.11a

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5720                    | Ant7 | 16.45                    |
| 5745                    | Ant7 | 16.43                    |
| 5785                    | Ant7 | 16.46                    |
| 5825                    | Ant7 | 16.42                    |

Test Mode:802.11a Ant7



Test Mode:802.11a Ant7



Test Mode:802.11a Ant7



Test Mode:802.11a Ant7




Test Mode:802. 11n HT20

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5720                    | Ant7 | 17.68                    |
| 5745                    | Ant7 | 17.64                    |
| 5785                    | Ant7 | 17.63                    |
| 5825                    | Ant7 | 17.69                    |

Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7

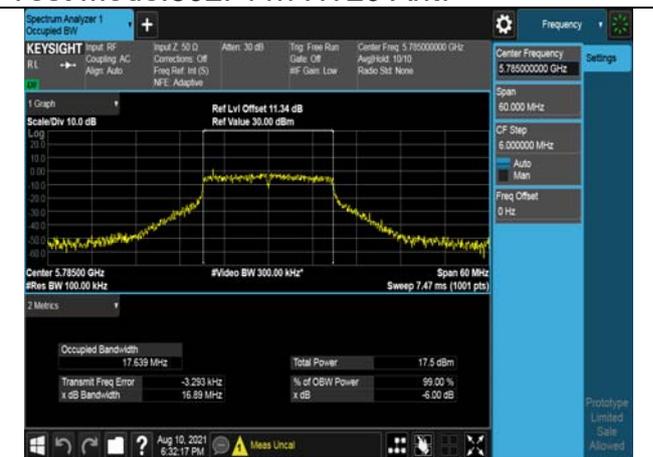

Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT40

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5710                    | Ant7 | 36.22                    |
| 5755                    | Ant7 | 36.16                    |
| 5795                    | Ant7 | 36.15                    |

Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11ac VHT20

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5720                    | Ant7 | 17.65                    |
| 5745                    | Ant7 | 17.66                    |
| 5785                    | Ant7 | 17.66                    |
| 5825                    | Ant7 | 17.64                    |

Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT40

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5710                    | Ant7 | 36.21                    |
| 5755                    | Ant7 | 36.21                    |
| 5795                    | Ant7 | 36.21                    |

Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT80

| Carrier frequency (MHz) | Ant  | Occupied Bandwidth (MHz) |
|-------------------------|------|--------------------------|
| 5690                    | Ant7 | 75.641                   |
| 5775                    | Ant7 | 75.615                   |

Test Mode:802. 11ac VHT80 Ant7



Test Mode:802. 11ac VHT80 Ant7



### 6dB Bandwidth

Offset 11.34dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 0.84dB

#### Test Mode:802.11a

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5720                    | Ant7 | 16.01               |
| 5745                    | Ant7 | 16.29               |
| 5785                    | Ant7 | 16.43               |
| 5825                    | Ant7 | 16.47               |

#### Test Mode:802.11a Ant7



#### Test Mode:802.11a Ant7



#### Test Mode:802.11a Ant7



#### Test Mode:802.11a Ant7



Test Mode:802. 11n HT20

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5720                    | Ant7 | 16.90               |
| 5745                    | Ant7 | 17.54               |
| 5785                    | Ant7 | 17.62               |
| 5825                    | Ant7 | 17.03               |

Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7




Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT40

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5710                    | Ant7 | 36.40               |
| 5755                    | Ant7 | 36.36               |
| 5795                    | Ant7 | 35.29               |

Test Mode:802. 11n HT40 Ant7

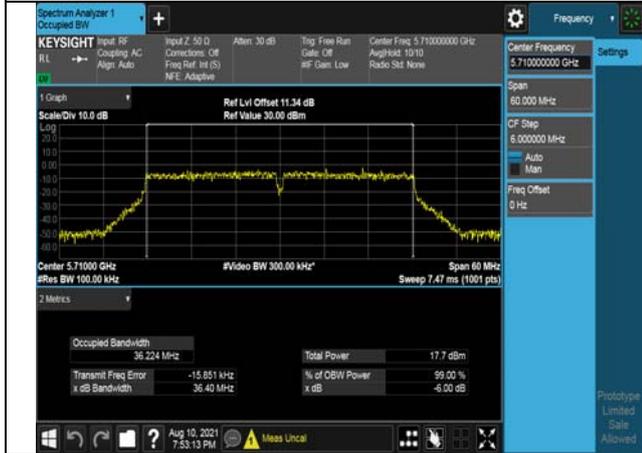

Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11ac VHT20

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5720                    | Ant7 | 17.56               |
| 5745                    | Ant7 | 17.70               |
| 5785                    | Ant7 | 17.56               |
| 5825                    | Ant7 | 16.89               |


Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7



Test Mode:802. 11ac VHT20 Ant7

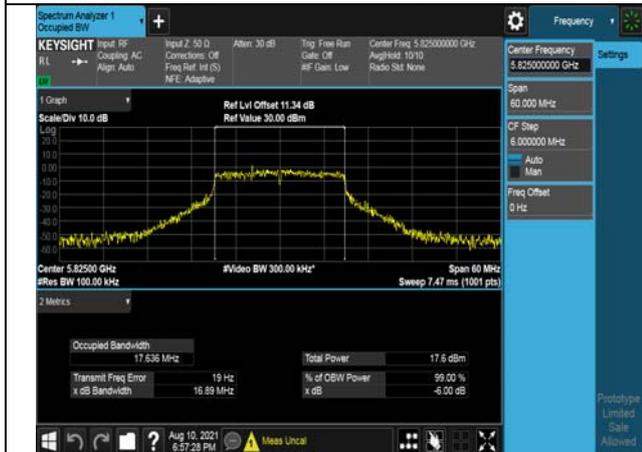

Test Mode:802. 11ac VHT40

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5710                    | Ant7 | 35.66               |
| 5755                    | Ant7 | 36.42               |
| 5795                    | Ant7 | 35.99               |

Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT40 Ant7



Test Mode:802. 11ac VHT80

| Carrier frequency (MHz) | Ant  | 6dB Bandwidth (MHz) |
|-------------------------|------|---------------------|
| 5690                    | Ant7 | 76.40               |
| 5775                    | Ant7 | 76.42               |

Test Mode:802. 11ac VHT80 Ant7



Test Mode:802. 11ac VHT80 Ant7




### Transmitter Power Spectral Density

Offset 11.34dB = Attenuator 10dB+ Temporary antenna connector loss 0.5dB+ Cable loss 0.84dB

Test Mode:802.11a

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5720                    | 0.05                  | Ant7 | 2.21                       |
| 5745                    |                       | Ant7 | 2.66                       |
| 5785                    |                       | Ant7 | 2.26                       |
| 5825                    |                       | Ant7 | 2.03                       |

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result.

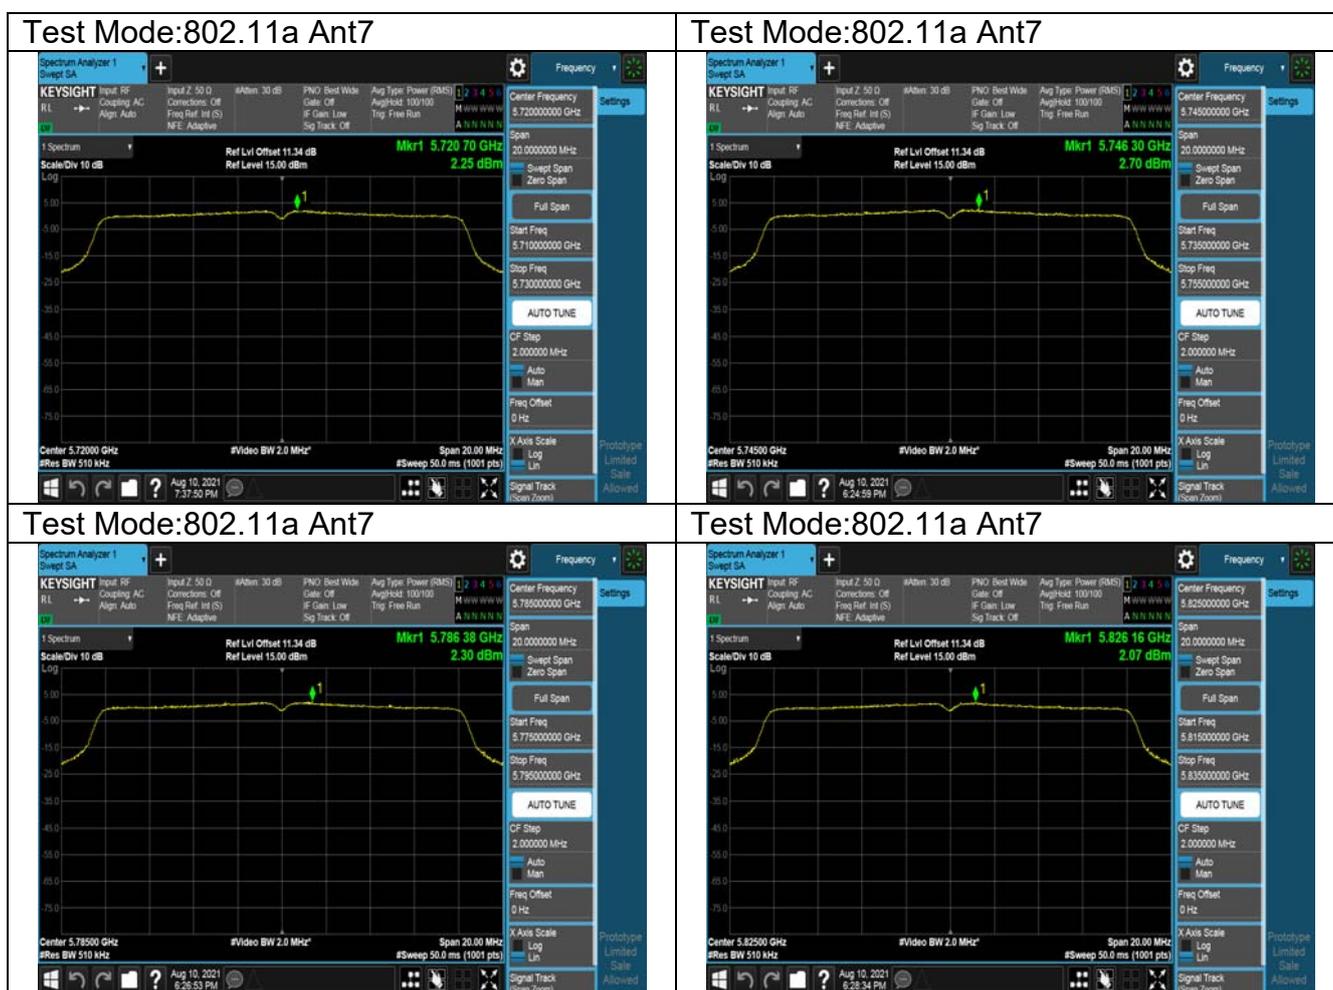

Test Mode:802. 11n HT20

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5720                    | 0.05                  | Ant7 | 2.56                       |
| 5745                    |                       | Ant7 | 2.61                       |
| 5785                    |                       | Ant7 | 2.41                       |
| 5825                    |                       | Ant7 | 2.90                       |

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT20 Ant7



Test Mode:802. 11n HT40

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5710                    | 0.28                  | Ant7 | -0.75                      |
| 5755                    |                       | Ant7 | -0.53                      |
| 5795                    |                       | Ant7 | -0.86                      |

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11n HT40 Ant7




Test Mode:802. 11n HT40 Ant7



Test Mode:802. 11ac VHT20

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5720                    | 0.05                  | Ant7 | 2.59                       |
| 5745                    |                       | Ant7 | 2.85                       |
| 5785                    |                       | Ant7 | 2.86                       |
| 5825                    |                       | Ant7 | 2.59                       |


Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

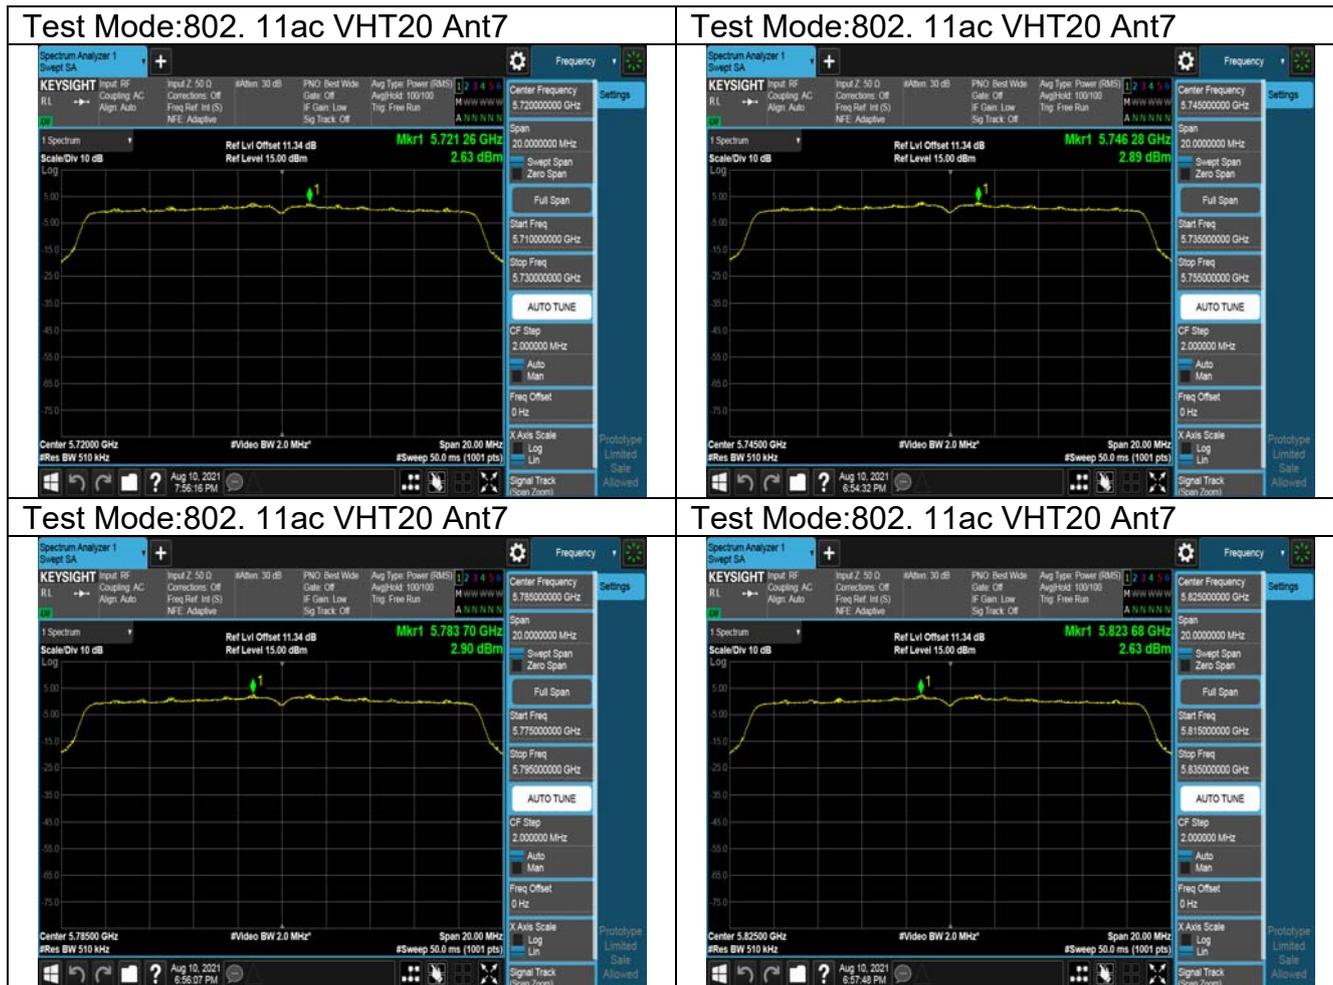

Test Mode:802. 11ac VHT40

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5710                    | 0.09                  | Ant7 | -0.99                      |
| 5755                    |                       | Ant7 | -0.60                      |
| 5795                    |                       | Ant7 | -0.62                      |

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

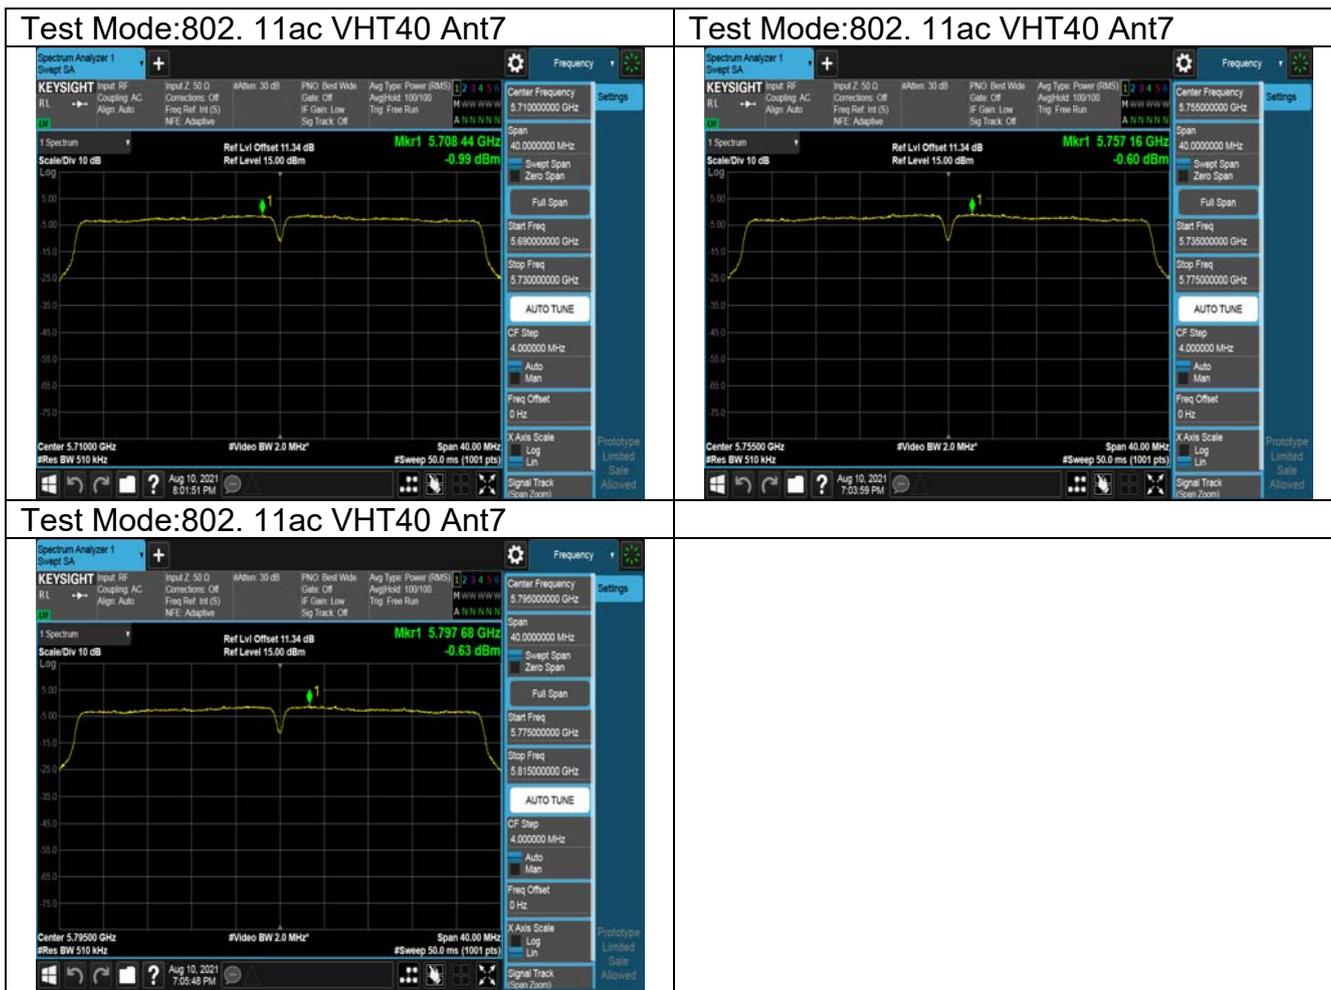

Test Mode:802. 11ac VHT80

| Carrier frequency (MHz) | Correction Factor(dB) | Ant  | Power Density (dBm/500kHz) |
|-------------------------|-----------------------|------|----------------------------|
| 5690                    | 0.18                  | Ant7 | -3.19                      |
| 5775                    | 0.19                  | Ant7 | -3.09                      |

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

