


Front Page


Instruction Manual

- Logo

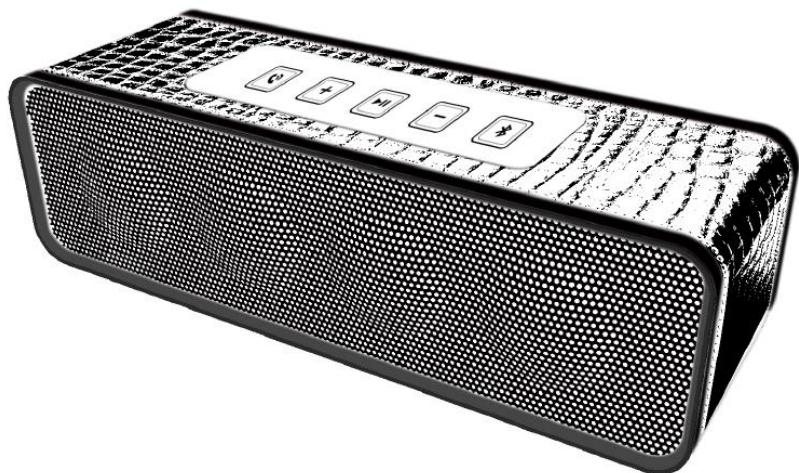

 **Bluetooth**

BS77 Back view

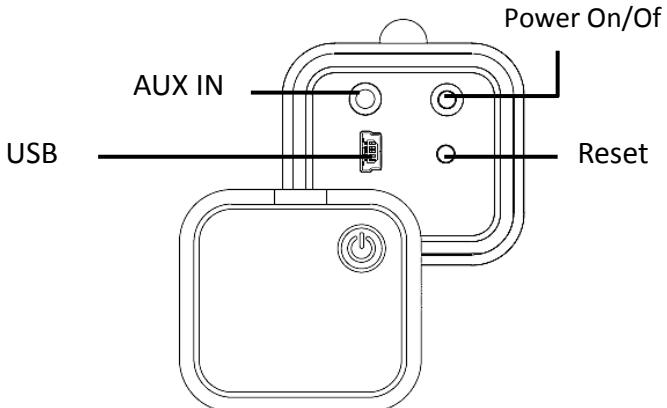

Power On/Off  Press and hold


AUX IN Use the included audio cable to connect the audio output of your device to the Line In input on the speaker.

USB (Charging) Use the included USB adapter to connect to the USB on the speaker. Charging status indicator on Play/Pause key:
1) Blinking of Play/Pause: Charging
2) Solid of Play/Pause: Charging cycle done

Reset Use a pin to reset the system

BS77

Touch panel

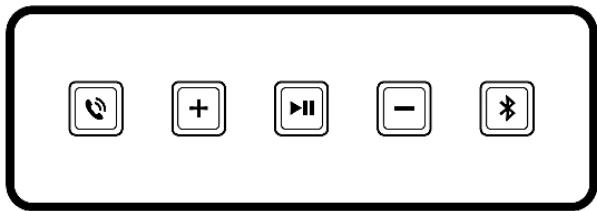

Play/Pause

Blinking: Indicate low battery



Volume Up/Down



Press and hold to start searching Bluetooth source

- 1.) Blinking: Speaker attempting to connect to a paired device.
- 2.) Solid: Speaker connected to paired device.
- 3.) If unable to connect within five minutes, Bluetooth stop searching for source



1) Press to answer/end calls.

2) Blinking: Indicate unanswered calls.

BS77

More featuring functions



Cannot see the buttons in the dark?

Night Vision: Press Power ()



Afraid of mis-touching the buttons while carrying the speakers?

Lock/Unlock the touch panel:

- 1) Press and hold the Play/Pause () until all the buttons on touch panel blink twice
- 2) Under Lock: Press any button on the touch panel, all the buttons blink twice and disabled functions.

Suggestion: Despite BS77 is IPX7-RATED Waterproof, the sensibility of the touch panel will be better induced in dry condition. We recommend you to wipe off water droplet(s) from the touch panel before usage.

BS77

Technical information

1. Power supply rating

Input: 100~240VAC, 50Hz/60Hz

2. Input power rating

Input: 5VDC/1A

3. Weight

1.28 lb. (490 g)

4. Dimensions (W/H/D)

7.3 in x 2.3 in x 2.2 in (185.3mm x 57.4mm x 56mm)

5. Temperature range for use

0°- 45°C (32° – 131°F)

Last Page -

Company Name

Telephone No.

Website

LOGO IMPORTANT SAFETY INFORMATION

SAFETY INFORMATION

Please read these safety warnings and cautions carefully. Failure to read, understand and follow these warnings can result in death or serious personal injury and property damage.

CAUTION	
RISK OF ELECTRIC SHOCK. DO NOT OPEN.	
	The lightning flash with arrowhead symbol within an equilateral triangle alerts the user to the presence of uninsulated, dangerous voltage within the system enclosure that may be of sufficient magnitude to constitute a risk of electric shock
	The exclamation point within an equilateral triangle, as marked on the system, is intended to alert the user to the presence of important operating and maintenance instructions in this owner's guide.
Caution: To reduce the risk of electric shock. DO NOT REMOVE COVER (OR BACK). No user-serviceable parts inside. Refer servicing to qualified personnel.	

Make no modifications to the system or accessories.

Unauthorized alterations may compromise safety, regulatory compliance, and system performance.

WARNING:

- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not place any naked flame sources, such as lighted candles, on or near the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- This product contains magnets which can be harmful to pacemaker wearers.
- The battery pack shall not be exposed to excessive heat such as sunshine, fire or the like.
- Do not dismantle, open or shred battery pack.
- Do not short-circuit the battery or battery pack. Do not store the battery pack haphazardly in a box or drawer where it may short-circuit by other metal objects.

WARNING:

- Do not subject battery pack to mechanical shock.
- In the event of a battery pack leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
- Do not use any charger other than that specifically provided for use with the equipment.
- Do not use any battery pack which is not designed for use with the equipment.
- Keep battery pack out of the reach of children.
- The battery needs to be charged before use. Always use the correct charger and refer to the manufacturer's instructions or equipment manual for proper charging instructions.
- After extended periods of storage, it may be necessary to charge and discharge the battery pack several times to obtain maximum performance.
- Do not leave a battery on prolonged charge when not in use.
- The battery pack gives its best performance when it is operated at normal room temperature (20°C +/- 5°C).

【FCC Statement】

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radioexempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil n'edoit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillageradioelectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

【RF Exposure Information】

To comply with FCC/IC RF exposure requirements for mobile transmitting devices, this transmitter should only be used or installed at locations where there is at least 20 cm separation distance between the radiator and your body.

【CE statement】

ATTENTION

This is a Class A product. In a domestic environment, this product might cause radio interference, and the user might be required to take corrective measures

The standards compliance label on the Brocade 6510 contains the CE mark which indicates that this system conforms to the provisions of the following European Council directives, laws, and standards:

【Electromagnetic Compatibility (EMC) Directive 2004/108/EEC】

Low Voltage Directive (LVD) 2006/95/EC
EN50082-2/EN55024:1998 (European Immunity Requirements)
EN61000-3-2/IEC61000-3-2 (European and Japanese Harmonics Spec)
EN61000-3-3

【RoHS】

The Restriction of Hazardous Substances Directive 2002/95/EC, RoHS, short for Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment, was adopted in February 2003 by the European Union.

Company Name & Website