



TEST REPORT

Product Name: Rhapsody Entertainment Center
FCC ID: AUSCR7016A
Trademark: CROSLEY
Model Number: CR7016A-MA, CR7016X-XXXX("X-XXXX" can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Prepared For: Modern Marketing Concepts, Inc.
Address: 1220 E Oak, St. Louisville, KY 40204 United States
Manufacturer: Timsen Development Limited
Address: 5F, 447# Tianhebei Road, Guangzhou, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Jul. 28, 2020
Sample tested Date: Jul. 28, 2020 to Aug. 4, 2020
Issue Date: Aug. 4, 2020
Report No.: CTB200804008RFX
Test Standards: FCC Part 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Arron Liu

Reviewed by:

Rita Xiao

Approved by:

Sherwin Qian/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35

9.2	Limit.....	35
9.3	Test procedure	35
9.4	Test Result	36
10.	20DB OCCUPIED BANDWIDTH.....	40
10.1	Block Diagram Of Test Setup	40
10.2	Limit.....	40
10.3	Test procedure	40
10.4	Test Result	40
11.	CARRIER FREQUENCIES SEPARATION	44
11.1	Block Diagram Of Test Setup	44
11.2	Limit.....	44
11.3	Test procedure	44
11.4	Test Result	44
12.	HOPPING CHANNEL NUMBER	48
12.1	Block Diagram Of Test Setup	48
12.2	Limit.....	48
12.3	Test procedure	48
12.4	Test Result	48
13.	DWELL TIME.....	50
13.1	Block Diagram Of Test Setup	50
13.2	Limit.....	50
13.3	Test procedure	50
13.4	Test Result	51
14.	PSEUDORANDOM FREQUENCY	55
14.1	Limit.....	55
14.2	Test procedure	55
14.3	Test Result	56
15.	ANTENNA REQUIREMENT	57
16.	EUT PHOTOGRAPHS.....	58
17.	EUT TEST SETUP PHOTOGRAPHS	59

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB200804008RFX	Aug. 4, 2020	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	CR7016A-MA, CR7016X-XXXX("X-XXXX"can be replaced by letter from "A"to"Z" , number from "0" to "9"or blank)
Model Description:	All model's the function, software and electric circuit are the same, only with a product sizes, colors and model named different. Test sample model: CR7016A-MA
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V-0
Software Version:	V-0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 1.595dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB Antenna
Antenna Gain:	Bluetooth: 0dBi
Ratings:	Model 1:AK24WG-1200200U INPUT: AC 100-240V 50/60Hz,0.6A OUTPUT : DC12V, 2A Model 2: JS030SPS-120200UH INPUT: AC 100-240V 50/60Hz,0.8A OUTPUT : DC12V, 2A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Rhapsody Entertainment Center	CROSLEY	CR7016A-MA	N/A	N/A
2	Adapter	N/A	AK24WG-1200200U	N/A	N/A
3	Adapter	N/A	JS030SPS-120200UH	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK/π/4DQPSK/8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK/π/4DQPSK/8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	12V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Oct. 17, 2019	Oct. 16, 2020
2	Power Sensor	Agilent	U2021XA	MY56120032	Nov. 02, 2019	Nov. 01, 2020
3	Power Sensor	Agilent	U2021XA	MY56120034	Nov. 02, 2019	Nov. 01, 2020
4	Communication test set	R&S	CMW500	118735	Nov. 02, 2019	Nov. 01, 2020
5	Spectrum Analyzer	R&S	FSP40	100550	Nov. 02, 2019	Nov. 01, 2020
6	Signal Generator	Agilent	N5181A	MY49060920	Nov. 03, 2019	Nov. 02, 2020
7	Signal Generator	Agilent	N5182A	MY47420195	Nov. 03, 2019	Nov. 02, 2020
8	Communication test set	R&S	CMU200	119978	Nov. 02, 2019	Nov. 01, 2020
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Nov. 02, 2019	Nov. 01, 2020
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Nov. 02, 2019	Nov. 01, 2020
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Nov. 02, 2019	Nov. 01, 2020
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Nov. 02, 2019	Nov. 01, 2020
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Nov. 02, 2019	Nov. 01, 2020
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 10, 2019	Nov. 09, 2020

17	Receiver	R&S	ESPI	100362	Nov. 02, 2019	Nov. 01, 2020
18	Amplifier	HP	8447E	2945A02747	Nov. 03, 2019	Nov. 02, 2020
19	Amplifier	Agilent	8449B	3008A01838	Nov. 03, 2019	Nov. 02, 2020
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	Nov. 02, 2019	Nov. 01, 2020
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2019	Nov. 01, 2020
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Nov. 02, 2019	Nov. 01, 2020
24	loop antenna	ZHINAN	ZN30900A	/	Nov. 02, 2019	Nov. 01, 2020
25	Horn antenna	A/H/System	SAS-574	588	Nov. 02, 2019	Nov. 01, 2020
26	Amplifier	AEROFLEX	/	S/N/ 097	Nov. 02, 2019	Nov. 01, 2020

Conducted emissions Test						
27	Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
28	AMN	ROHDE&SC HWAZ	ESH3-Z5	831551852	Nov. 02, 2019	Nov. 01, 2020
29	Pulse limiter	ROHDE&SC HWAZ	ESH3Z2	357881052	Nov. 02, 2019	Nov. 01, 2020
30	EMI TEST RECEIVER	ROHDE&SC HWAZ	ESCS30	834115/006	Nov. 02, 2019	Nov. 01, 2020
31	Coaxial cable	ZDECL	Z302S	18091904	Nov. 02, 2019	Nov. 01, 2020
32	ISN	TESEQ	NTFM8158	NTFM8158# 183	Nov. 02, 2019	Nov. 01, 2020
33	EMI TEST RECEIVER	ROHDE&SC HWAZ	ESCI	10428	Nov. 02, 2019	Nov. 01, 2020
34	Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

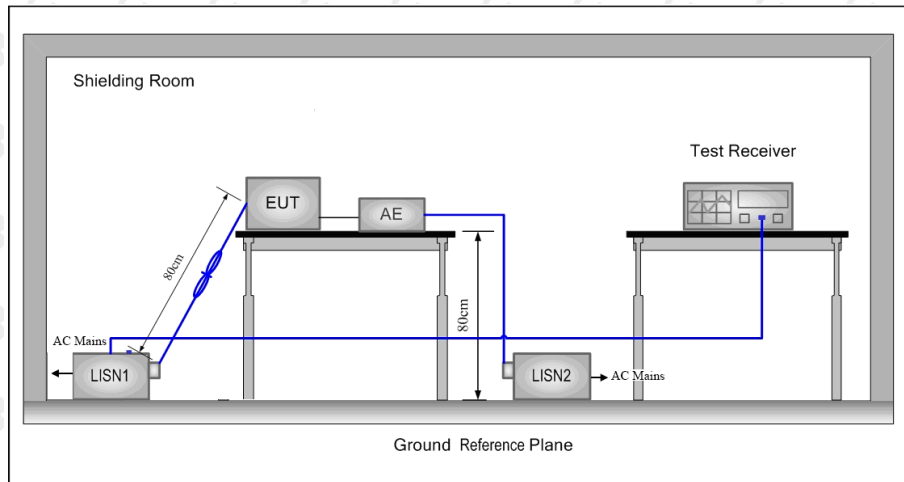

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

L:

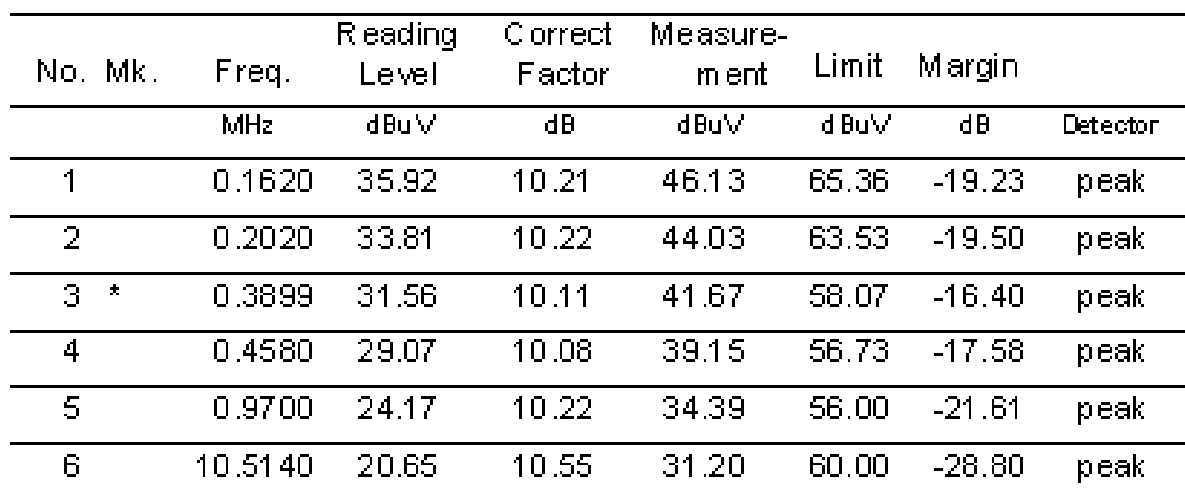

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

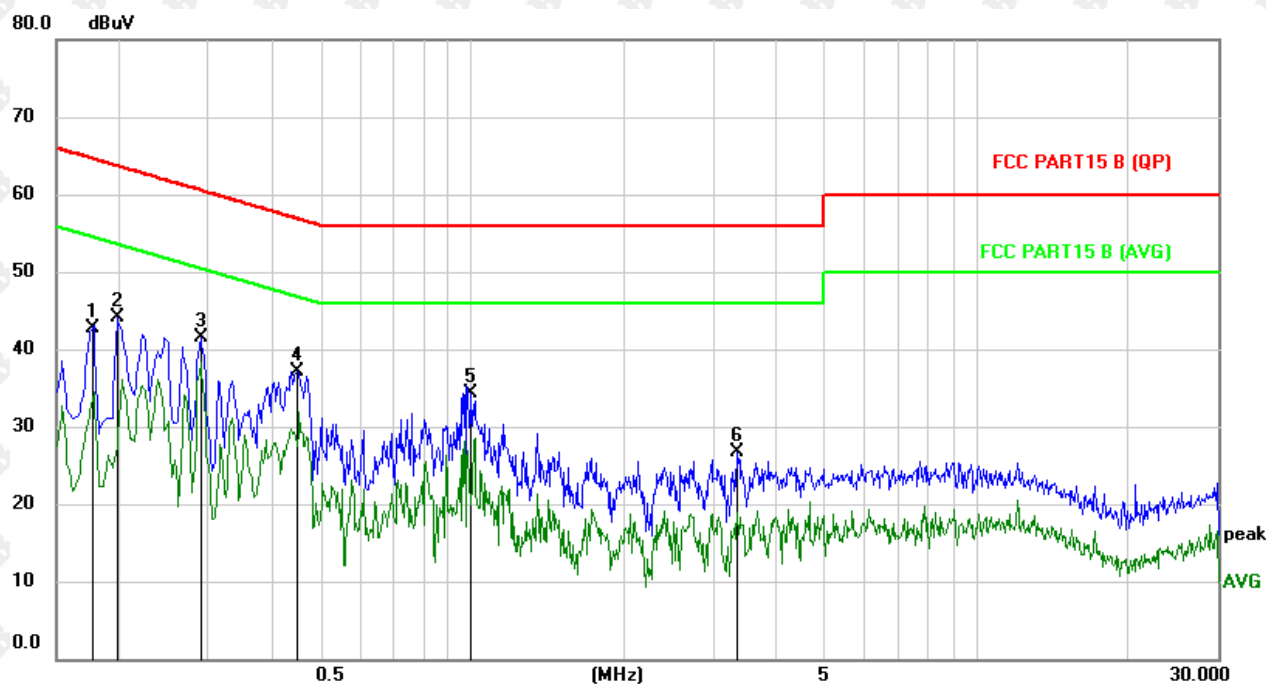

No.	Mk.	freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1768	32.69	10.10	42.79	64.63	-21.84	peak
2		0.1980	34.00	10.12	44.12	63.69	-19.57	peak
3	*	0.2900	31.31	10.15	41.46	60.52	-19.06	peak
4		0.4500	26.93	10.22	37.15	56.88	-19.73	peak
5		0.9980	24.18	10.15	34.33	56.00	-21.67	peak
6		3.3620	16.49	10.30	26.79	56.00	-29.21	peak

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

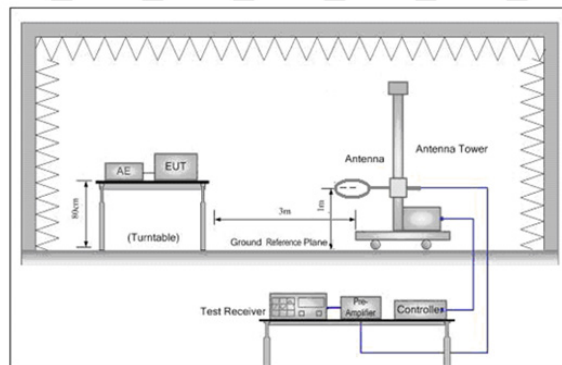


Figure 1. Below 30MHz

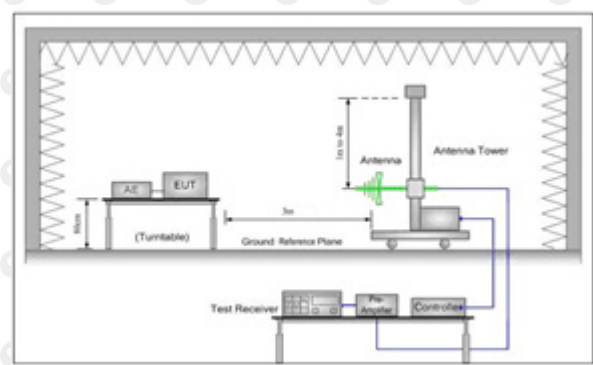


Figure 2. 30MHz to 1GHz

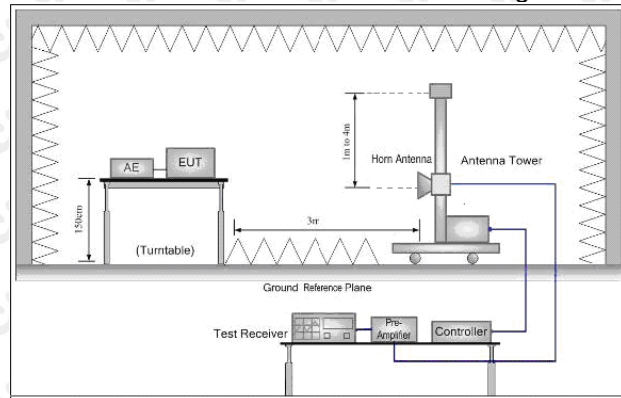


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

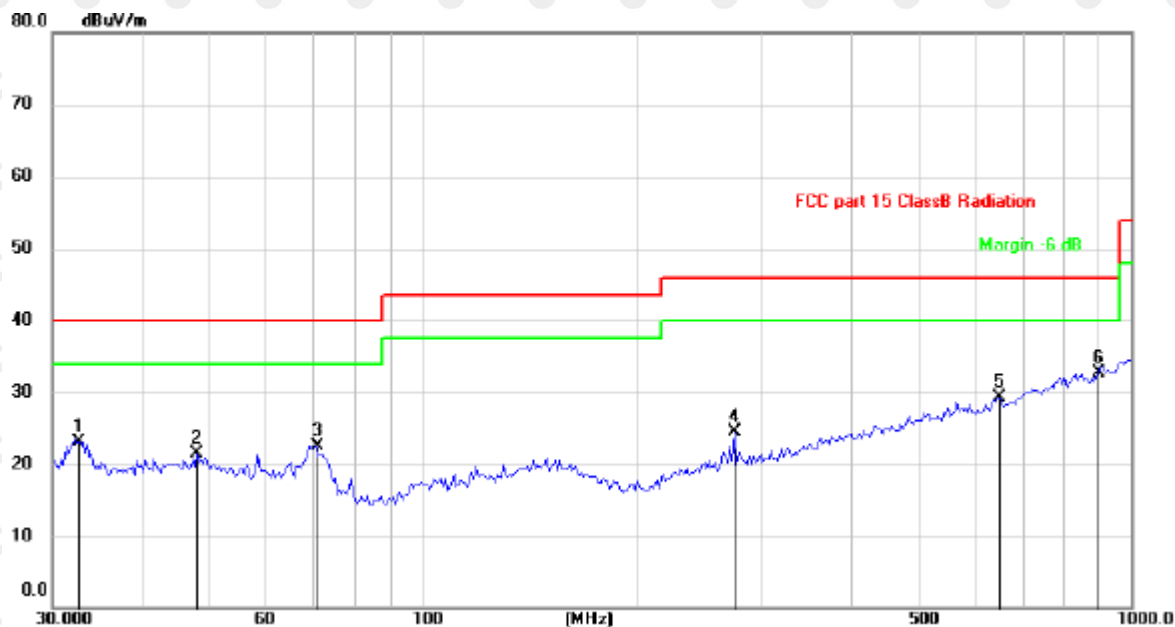

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm
1		32.6340	30.25	-7.14	23.11	40.00	-16.89	peak
2		47.9940	27.44	-5.98	21.46	40.00	-18.54	peak
3		70.5836	31.29	-8.81	22.48	40.00	-17.52	peak
4		275.1570	30.30	-5.75	24.55	46.00	-21.45	peak
5		651.9417	26.36	2.98	29.34	46.00	-16.66	peak
6	*	893.8567	25.81	6.89	32.70	46.00	-13.30	peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

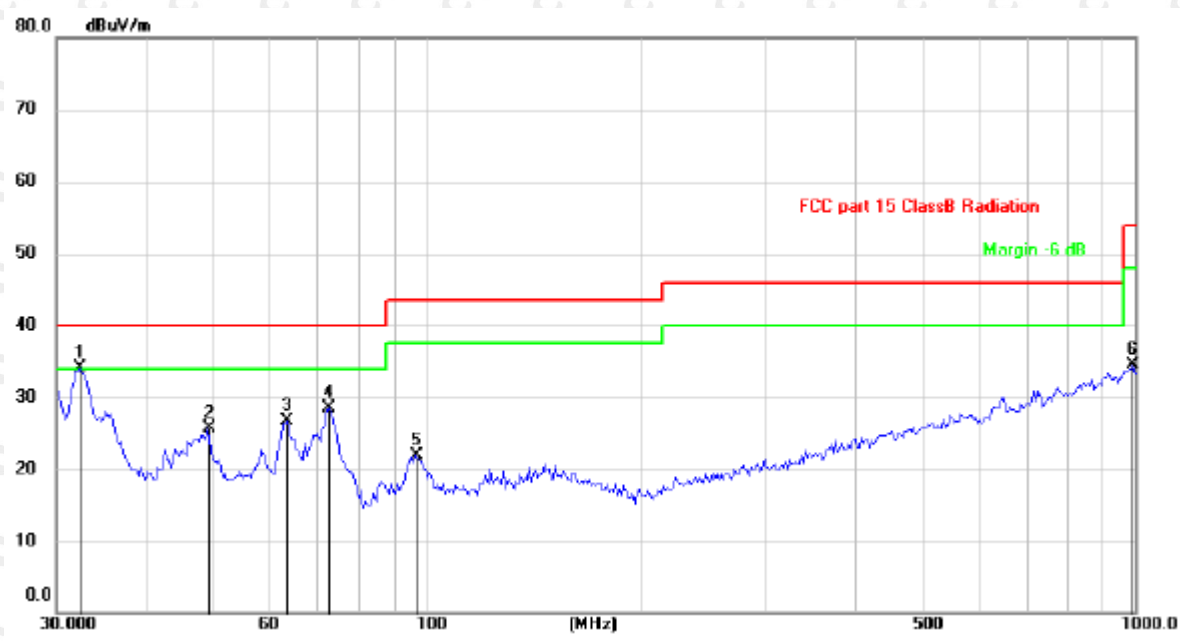

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm
1	*	32.4059	41.38	-7.18	34.20	40.00	-5.80	peak
2		49.0145	31.73	-6.05	25.68	40.00	-14.32	peak
3		63.5356	34.13	-7.45	26.68	40.00	-13.32	peak
4		72.5916	37.60	-9.16	28.44	40.00	-11.56	peak
5		96.0986	31.64	-9.72	21.92	43.50	-21.58	peak
6		993.0114	26.51	8.03	34.54	54.00	-19.46	peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.20	-3.65	53.55	74.00	-20.45	peak
4804	48.08	-3.65	44.43	54.00	-9.57	AVG
7206	61.16	-0.95	60.21	74.00	-13.79	peak
7206	40.11	-0.95	39.16	54.00	-14.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.59	-3.65	54.94	74.00	-19.06	peak
4804	50.49	-3.65	46.84	54.00	-7.16	AVG
7206	61.53	-0.95	60.58	74.00	-13.42	peak
7206	41.47	-0.95	40.52	54.00	-13.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	60.16	-3.54	56.62	74.00	-17.38	peak
4882.00	47.52	-3.54	43.98	54.00	-10.02	AVG
7323.00	56.88	-0.81	56.07	74.00	-17.93	peak
7323.00	44.49	-0.81	43.68	54.00	-10.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.24	-3.54	55.70	74.00	-18.30	peak
4882.00	48.06	-3.54	44.52	54.00	-9.48	AVG
7323.00	58.76	-0.81	57.95	74.00	-16.05	peak
7323.00	41.15	-0.81	40.34	54.00	-13.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.07	-3.43	55.64	74.00	-18.36	peak
4960	48.43	-3.44	44.99	54.00	-9.01	AVG
7440	60.50	-0.77	59.73	74.00	-14.27	peak
7440	42.40	-0.77	41.63	54.00	-12.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.79	-3.43	55.36	74.00	-18.64	peak
4960	48.32	-3.44	44.88	54.00	-9.12	AVG
7440	60.80	-0.77	60.03	74.00	-13.97	peak
7440	41.23	-0.77	40.46	54.00	-13.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.76	-5.81	50.95	74.00	-23.05	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.76	-5.84	48.92	74.00	-25.08	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.80	-5.81	50.99	74.00	-23.01	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.04	-5.84	49.20	74.00	-24.80	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	54.19	-5.81	48.38	74.00	-25.62	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.85	-6.06	48.79	74.00	-25.21	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.69	-5.81	51.88	74.00	-22.12	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.02	-6.06	47.96	74.00	-26.04	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.18	-5.81	49.37	74.00	-24.63	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.78	-5.84	49.94	74.00	-24.06	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.04	-5.81	49.23	74.00	-24.77	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	52.81	-5.84	46.97	74.00	-27.03	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.99	-5.81	51.18	74.00	-22.82	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.93	-6.06	48.87	74.00	-25.13	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.00	-5.81	50.19	74.00	-23.81	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.96	-6.06	47.90	74.00	-26.10	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

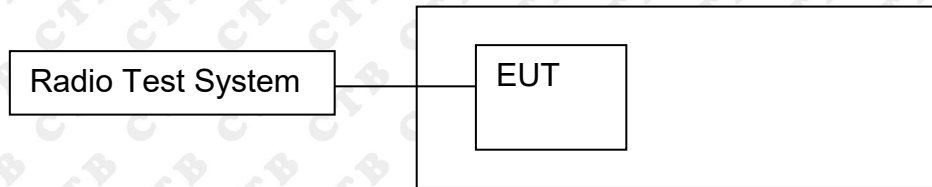


8.2 Limit




In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

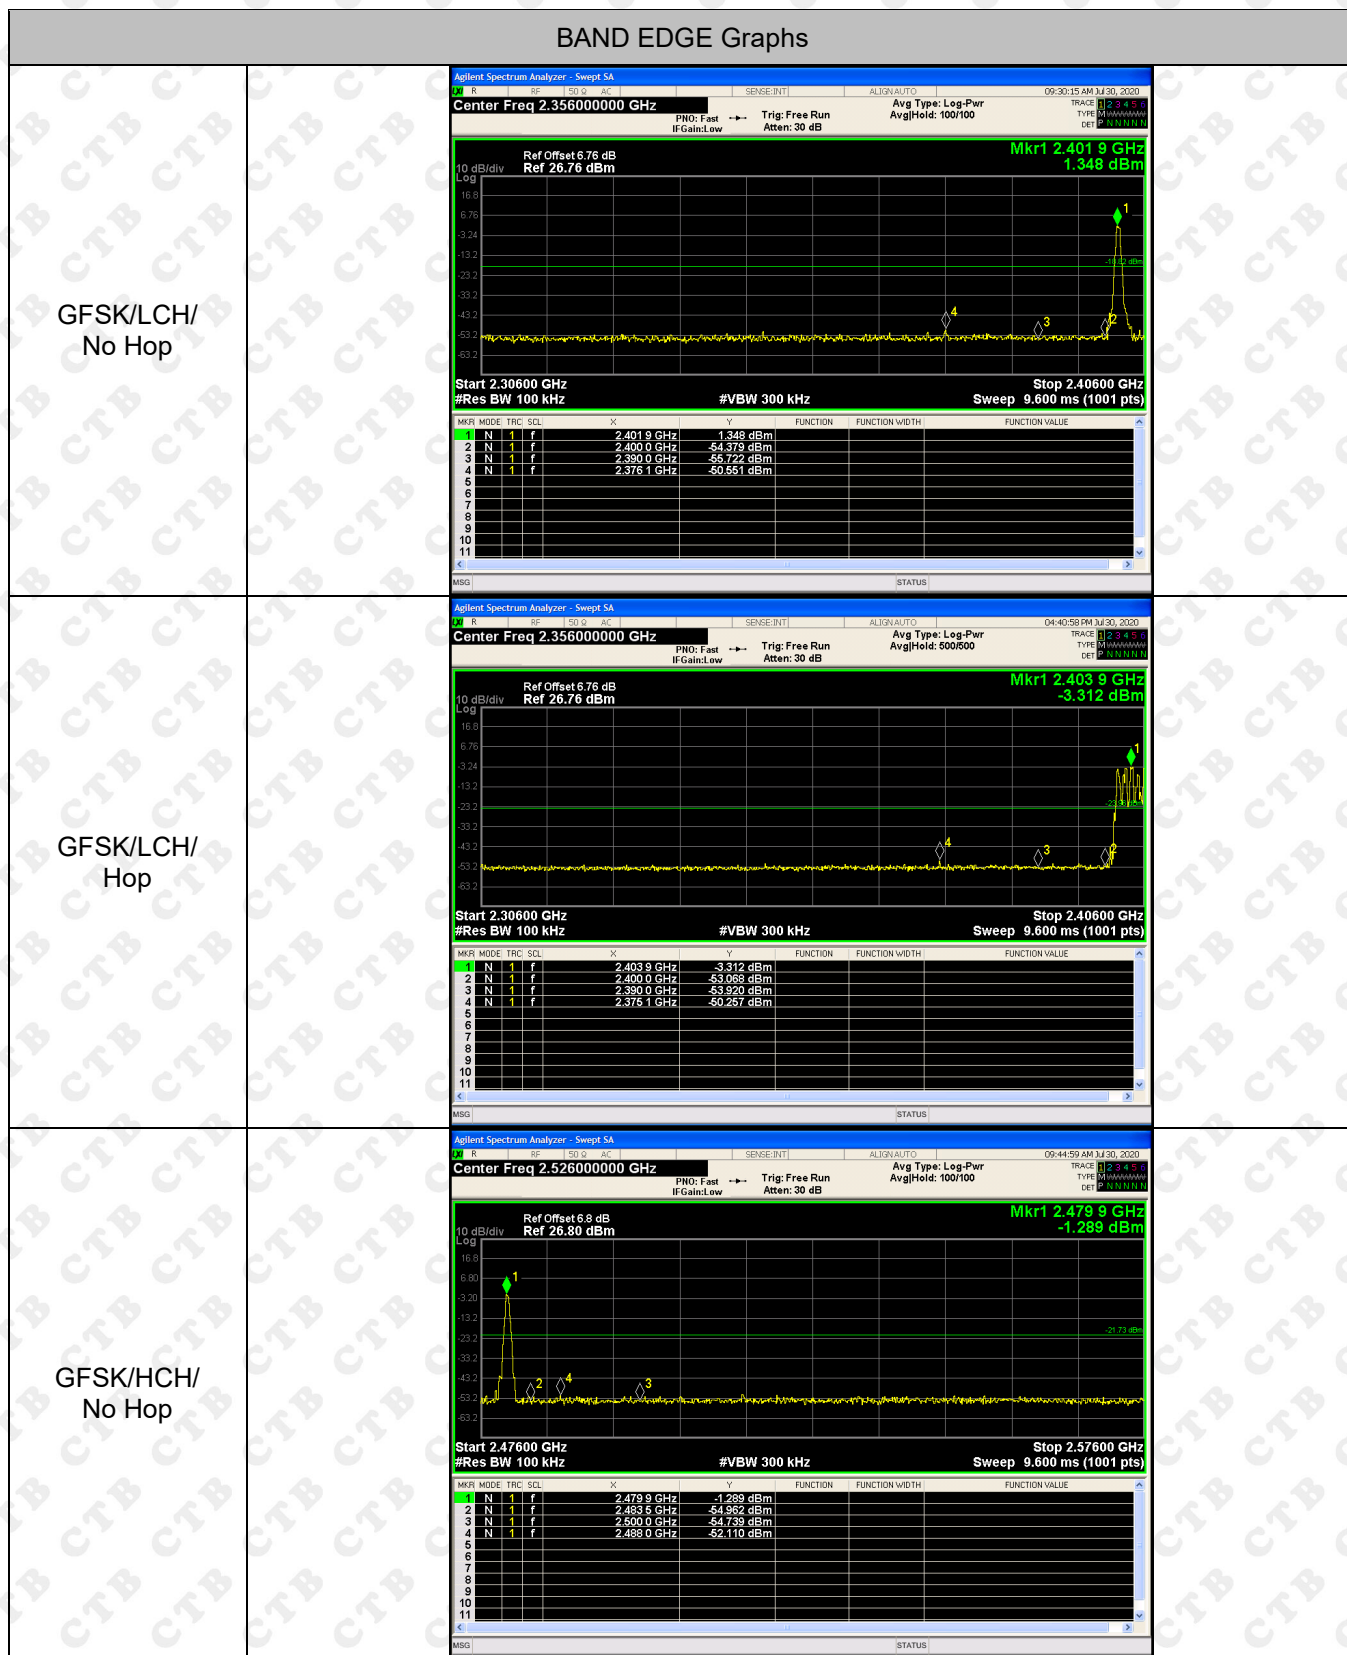

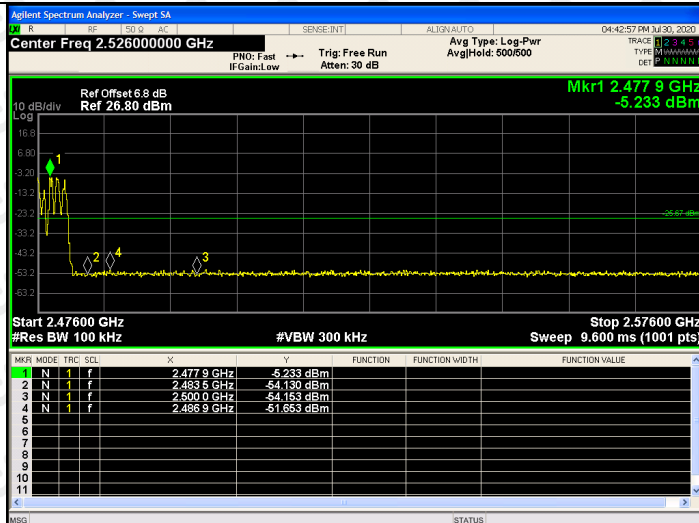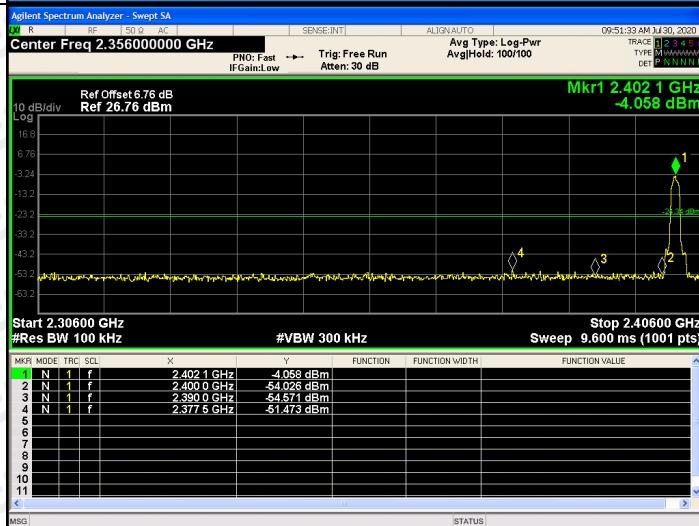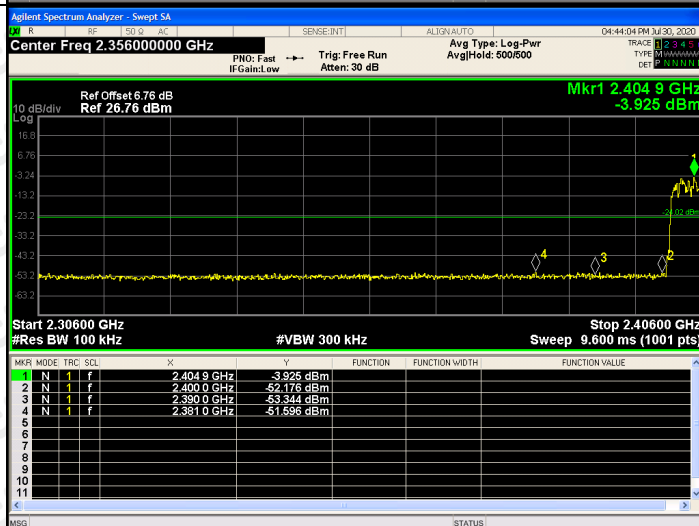
GFSK/HCH/
Hop

 π /4DQPSK/LCH/
No Hop

 π /4DQPSK/LCH/
Hop

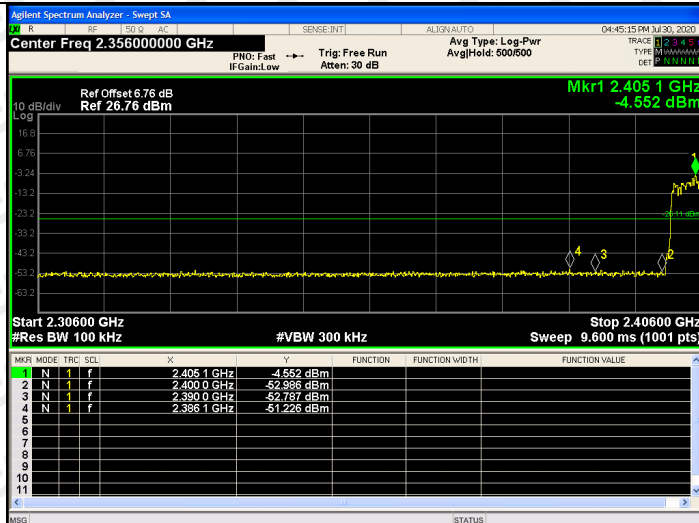
$\pi/4$ DQPSK/HCH/ No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.526000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr1 2.480 2 GHz -5.510 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>-5.510 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 5 GHz</td><td>-55.512 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 0 GHz</td><td>-53.702 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.498 8 GHz</td><td>-51.655 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-5.510 dBm				2	N	1	f	2.483 5 GHz	-55.512 dBm				3	N	1	f	2.500 0 GHz	-53.702 dBm				4	N	1	f	2.498 8 GHz	-51.655 dBm				6	N								7	N								8	N								9	N								10	N								11	N							
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																												
1	N	1	f	2.480 2 GHz	-5.510 dBm																																																																																															
2	N	1	f	2.483 5 GHz	-55.512 dBm																																																																																															
3	N	1	f	2.500 0 GHz	-53.702 dBm																																																																																															
4	N	1	f	2.498 8 GHz	-51.655 dBm																																																																																															
6	N																																																																																																			
7	N																																																																																																			
8	N																																																																																																			
9	N																																																																																																			
10	N																																																																																																			
11	N																																																																																																			
$\pi/4$ DQPSK/HCH/ Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.526000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr1 2.479 9 GHz -5.348 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 9 GHz</td><td>-5.348 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 5 GHz</td><td>-53.773 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 0 GHz</td><td>-53.524 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.496 2 GHz</td><td>-51.064 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 9 GHz	-5.348 dBm				2	N	1	f	2.483 5 GHz	-53.773 dBm				3	N	1	f	2.500 0 GHz	-53.524 dBm				4	N	1	f	2.496 2 GHz	-51.064 dBm				6	N								7	N								8	N								9	N								10	N								11	N							
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																												
1	N	1	f	2.479 9 GHz	-5.348 dBm																																																																																															
2	N	1	f	2.483 5 GHz	-53.773 dBm																																																																																															
3	N	1	f	2.500 0 GHz	-53.524 dBm																																																																																															
4	N	1	f	2.496 2 GHz	-51.064 dBm																																																																																															
6	N																																																																																																			
7	N																																																																																																			
8	N																																																																																																			
9	N																																																																																																			
10	N																																																																																																			
11	N																																																																																																			
8DPSK/LCH/ No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.356000000 GHz Ref Offset 6.76 dB Ref 26.76 dBm Mkr1 2.402 2 GHz -4.143 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40600 GHz Sweep 9.600 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 2 GHz</td><td>-4.143 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-54.002 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 0 GHz</td><td>-52.199 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.353 7 GHz</td><td>-51.768 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td>N</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 2 GHz	-4.143 dBm				2	N	1	f	2.400 0 GHz	-54.002 dBm				3	N	1	f	2.390 0 GHz	-52.199 dBm				4	N	1	f	2.353 7 GHz	-51.768 dBm				6	N								7	N								8	N								9	N								10	N								11	N							
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																												
1	N	1	f	2.402 2 GHz	-4.143 dBm																																																																																															
2	N	1	f	2.400 0 GHz	-54.002 dBm																																																																																															
3	N	1	f	2.390 0 GHz	-52.199 dBm																																																																																															
4	N	1	f	2.353 7 GHz	-51.768 dBm																																																																																															
6	N																																																																																																			
7	N																																																																																																			
8	N																																																																																																			
9	N																																																																																																			
10	N																																																																																																			
11	N																																																																																																			


8DPSK /LCH/
Hop

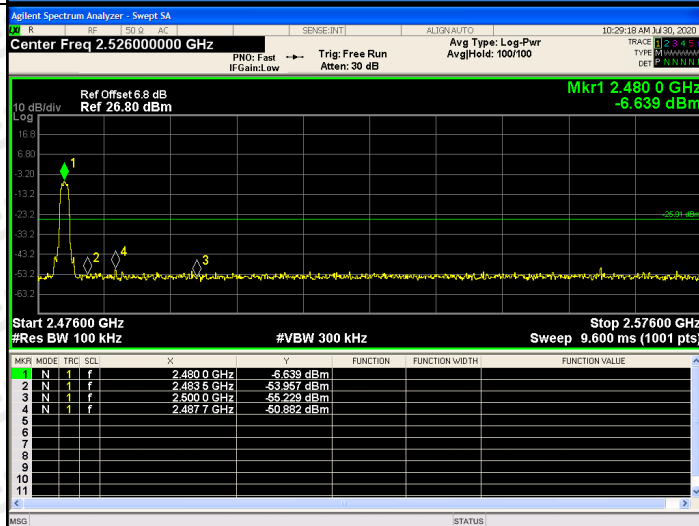

8DPSK /HCH/
No Hop




8DPSK /HCH/
Hop

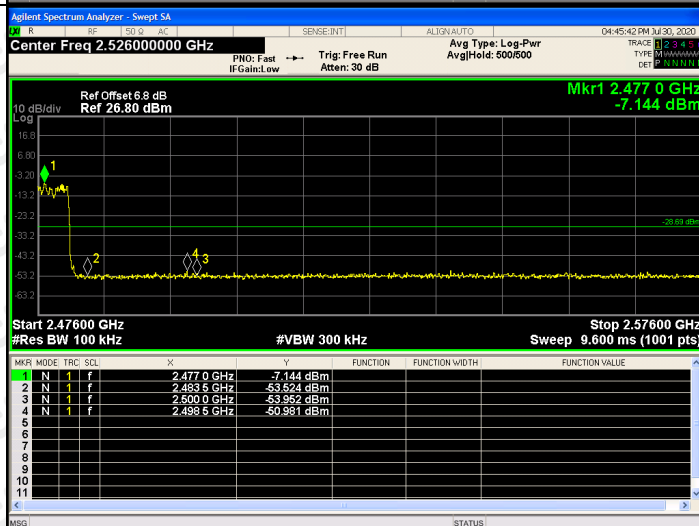


RF Conducted Spurious Emissions Graphs


GFSK/LCH

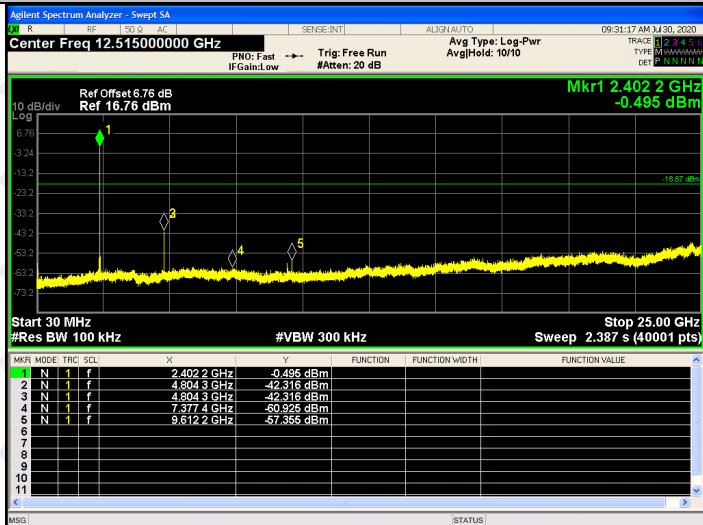

GFSK/MCH

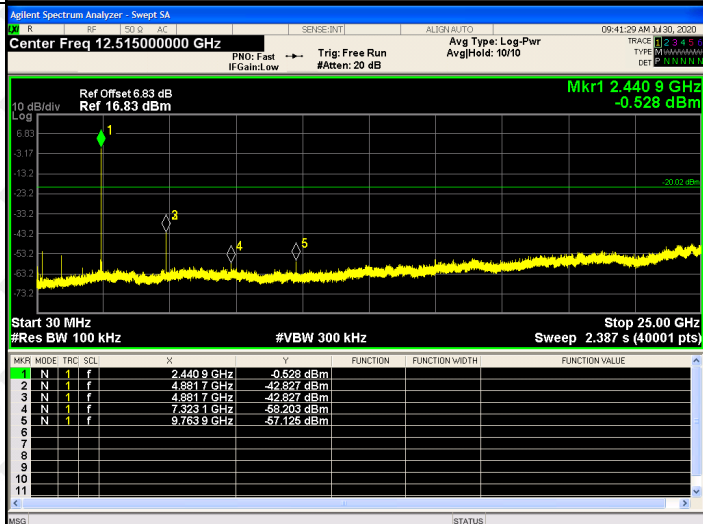


GFSK/HCH

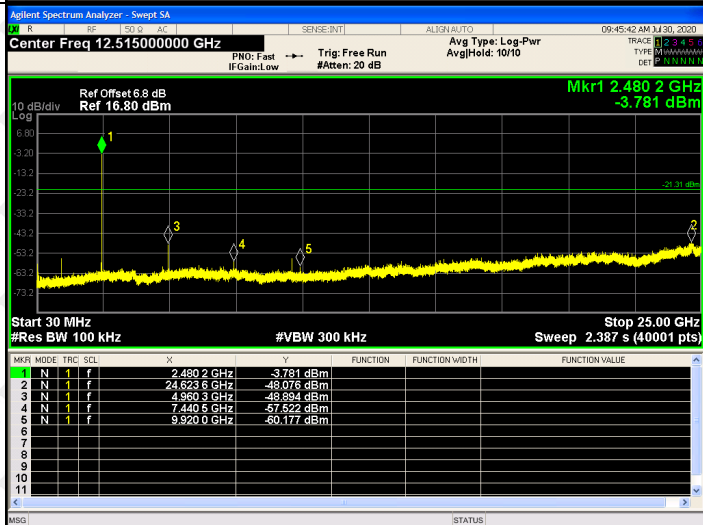


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 12.51500000 GHz Ref Offset 6.76 dB Ref 16.76 dBm Mkr1 2.402 2 GHz -5.683 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (40001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 2 GHz</td><td>-5.683 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.804 3 GHz</td><td>-43.900 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 3 GHz</td><td>-43.900 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.377 4 GHz</td><td>-60.484 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.608 5 GHz</td><td>-58.114 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 2 GHz	-5.683 dBm				2	N	1	f	4.804 3 GHz	-43.900 dBm				3	N	1	f	4.804 3 GHz	-43.900 dBm				4	N	1	f	7.377 4 GHz	-60.484 dBm				5	N	1	f	9.608 5 GHz	-58.114 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.402 2 GHz	-5.683 dBm																																																		
2	N	1	f	4.804 3 GHz	-43.900 dBm																																																		
3	N	1	f	4.804 3 GHz	-43.900 dBm																																																		
4	N	1	f	7.377 4 GHz	-60.484 dBm																																																		
5	N	1	f	9.608 5 GHz	-58.114 dBm																																																		
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 12.51500000 GHz Ref Offset 6.83 dB Ref 16.83 dBm Mkr1 2.440 9 GHz -5.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (40001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 9 GHz</td><td>-5.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.882 3 GHz</td><td>-48.729 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.882 3 GHz</td><td>-48.729 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.140 2 GHz</td><td>-59.933 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.764 6 GHz</td><td>-57.683 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 9 GHz	-5.519 dBm				2	N	1	f	4.882 3 GHz	-48.729 dBm				3	N	1	f	4.882 3 GHz	-48.729 dBm				4	N	1	f	7.140 2 GHz	-59.933 dBm				5	N	1	f	9.764 6 GHz	-57.683 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 9 GHz	-5.519 dBm																																																		
2	N	1	f	4.882 3 GHz	-48.729 dBm																																																		
3	N	1	f	4.882 3 GHz	-48.729 dBm																																																		
4	N	1	f	7.140 2 GHz	-59.933 dBm																																																		
5	N	1	f	9.764 6 GHz	-57.683 dBm																																																		
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 12.51500000 GHz Ref Offset 6.8 dB Ref 16.80 dBm Mkr1 2.480 2 GHz -7.324 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (40001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>-7.324 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.698 8 GHz</td><td>-47.013 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.859 7 GHz</td><td>-49.354 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.240 1 GHz</td><td>-60.592 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 0 GHz</td><td>-60.195 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-7.324 dBm				2	N	1	f	24.698 8 GHz	-47.013 dBm				3	N	1	f	4.859 7 GHz	-49.354 dBm				4	N	1	f	7.240 1 GHz	-60.592 dBm				5	N	1	f	9.920 0 GHz	-60.195 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-7.324 dBm																																																		
2	N	1	f	24.698 8 GHz	-47.013 dBm																																																		
3	N	1	f	4.859 7 GHz	-49.354 dBm																																																		
4	N	1	f	7.240 1 GHz	-60.592 dBm																																																		
5	N	1	f	9.920 0 GHz	-60.195 dBm																																																		


8DPSK/LCH

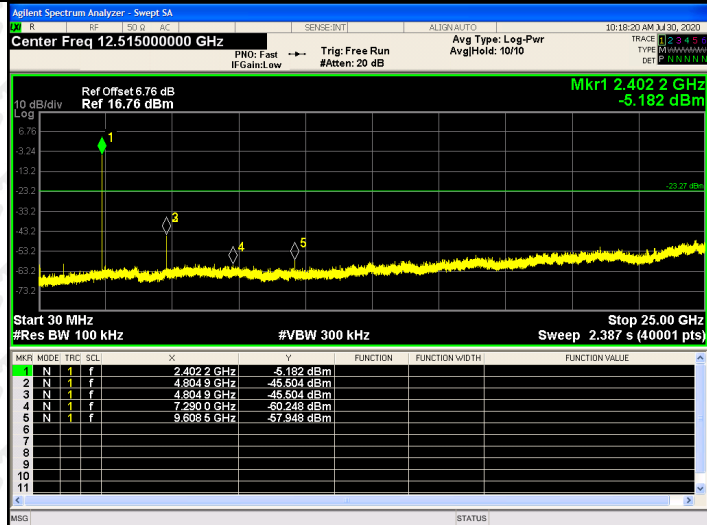

8DPSK/MCH

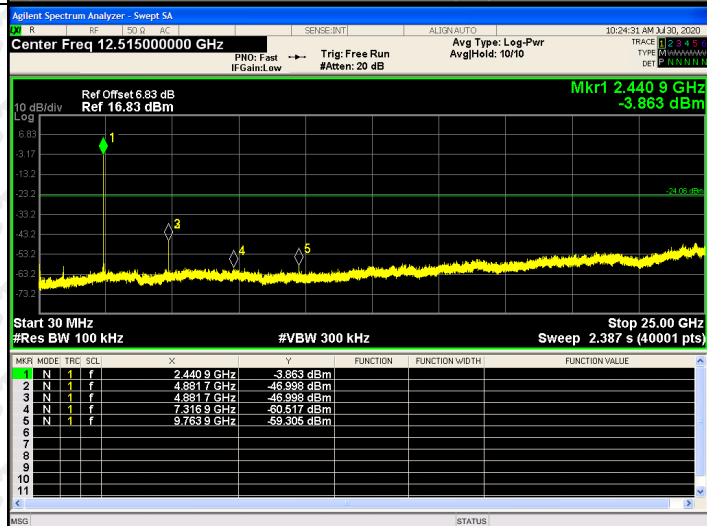


8DPSK/HCH

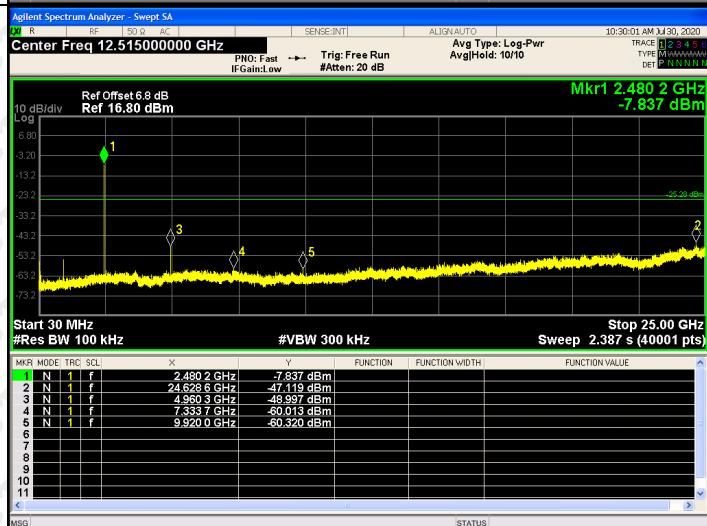

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

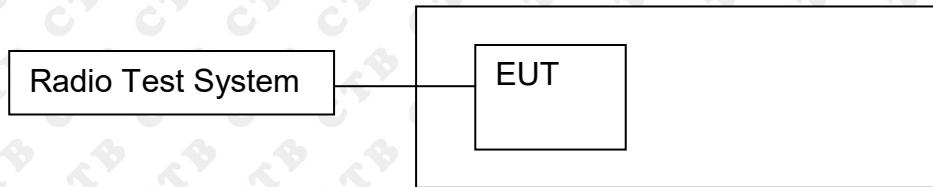

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
BDR mode (GFSK)	LCH	1.595	PASS
	MCH	0.322	PASS
	HCH	-0.99	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-0.571	PASS
	MCH	-1.167	PASS
	HCH	-2.415	PASS
EDR mode (8DPSK)	LCH	0.406	PASS
	MCH	-0.381	PASS
	HCH	-1.748	PASS

Test Graph:

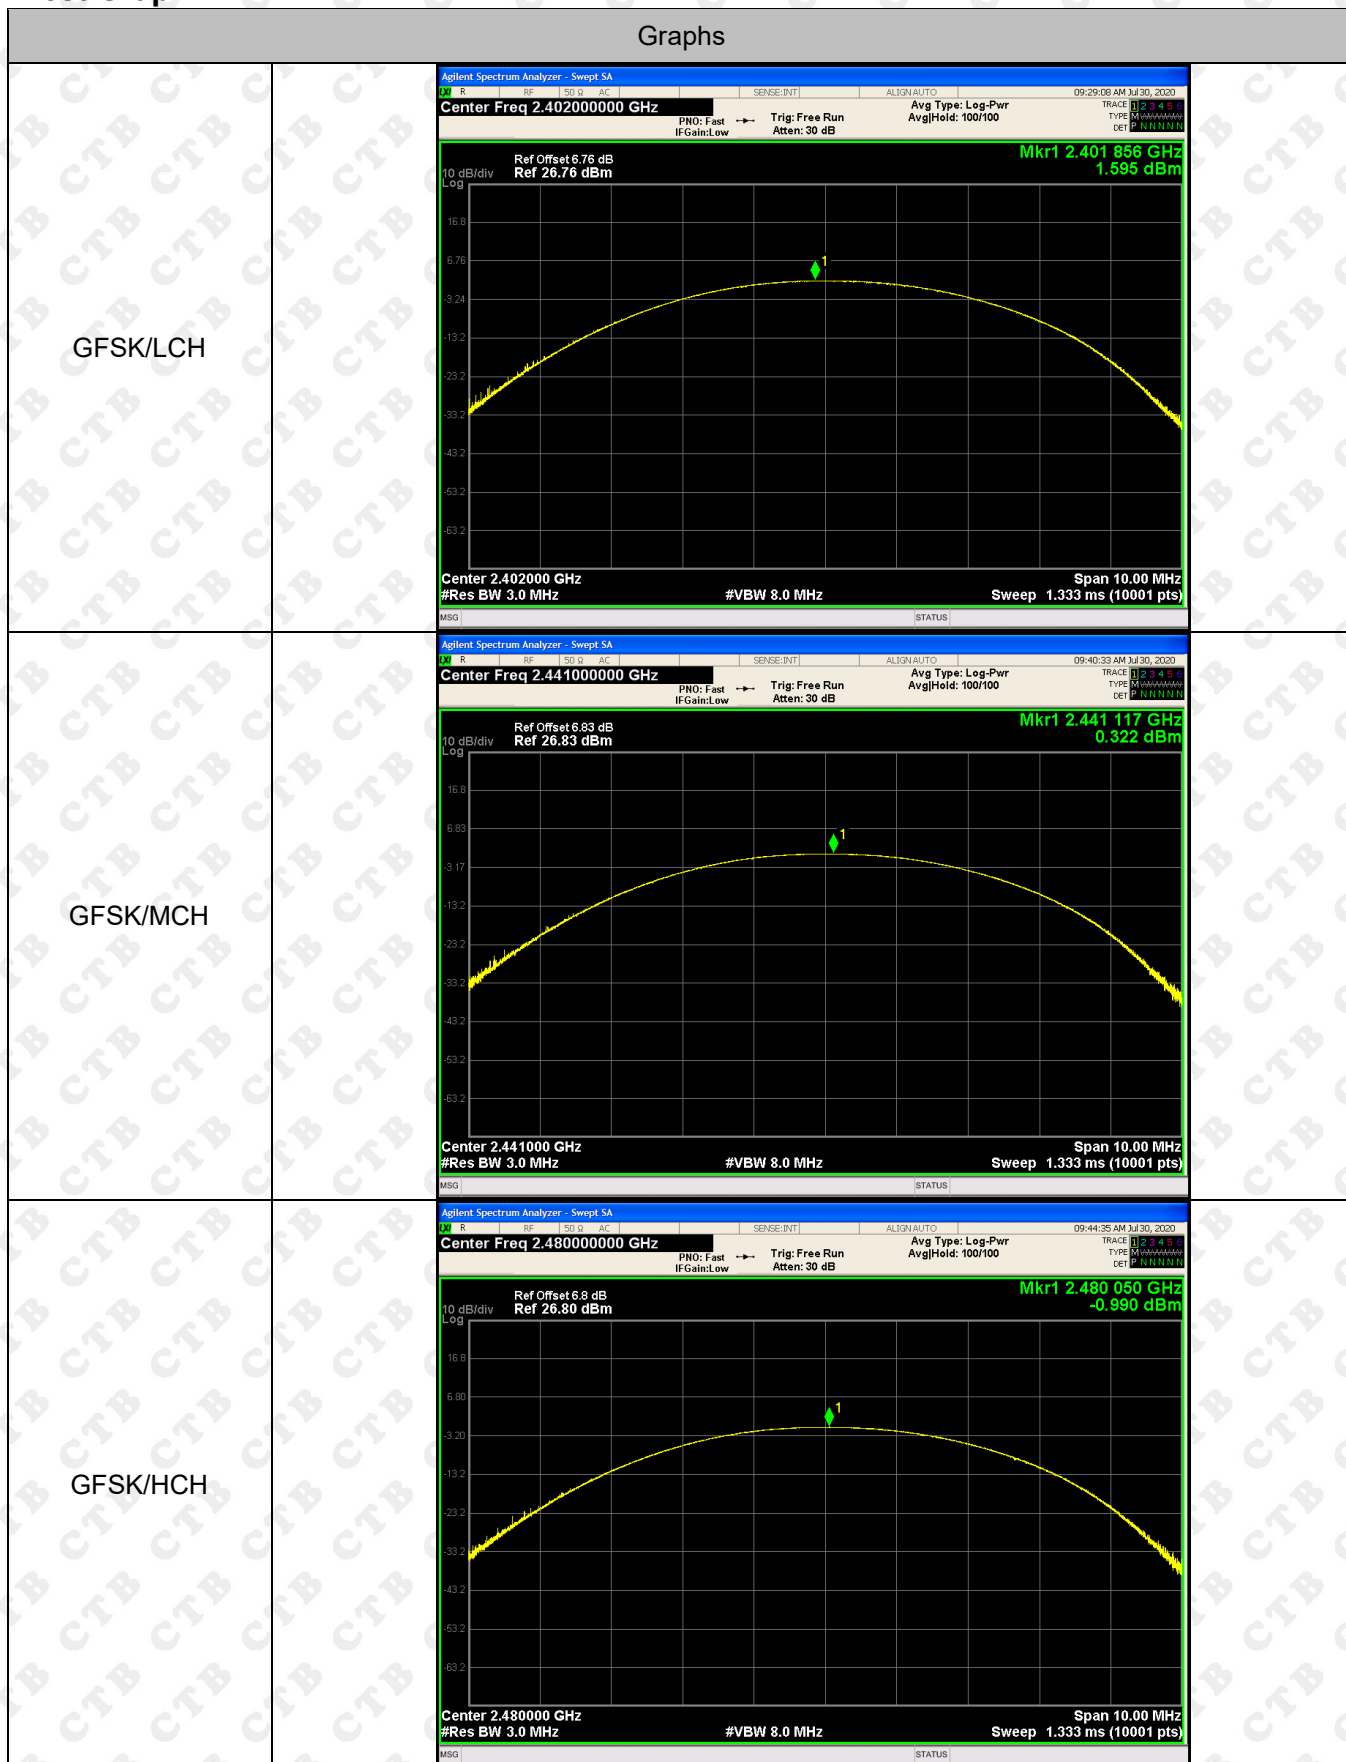


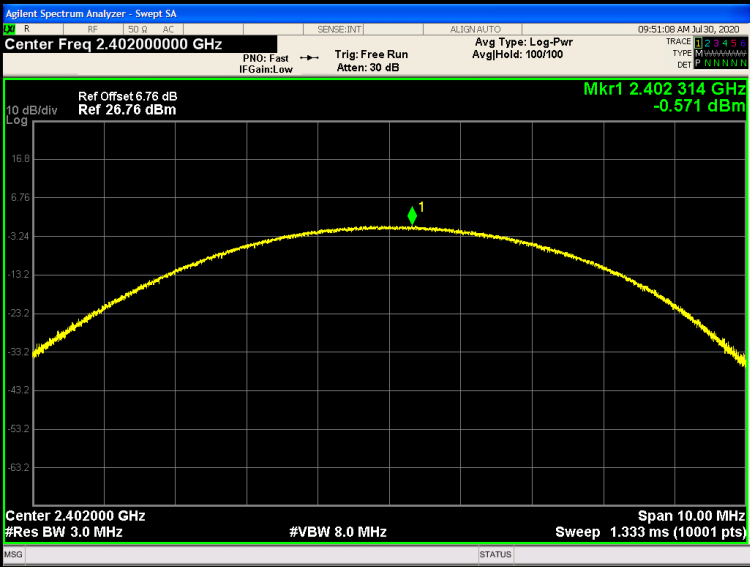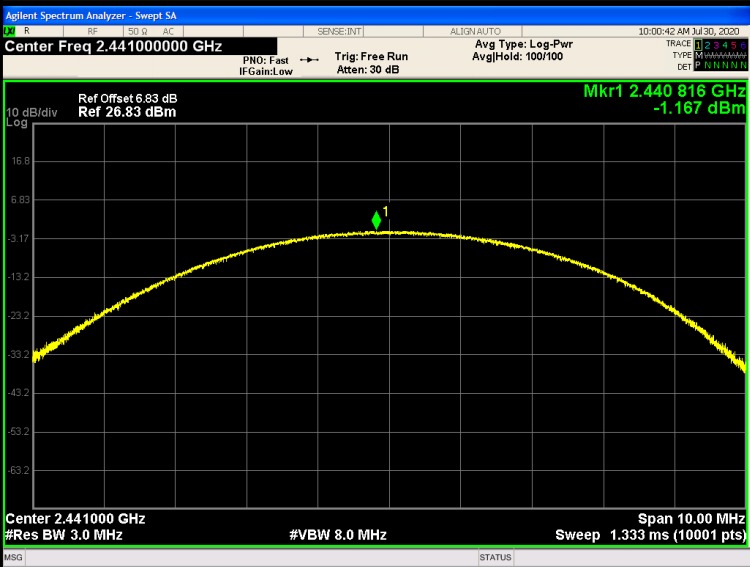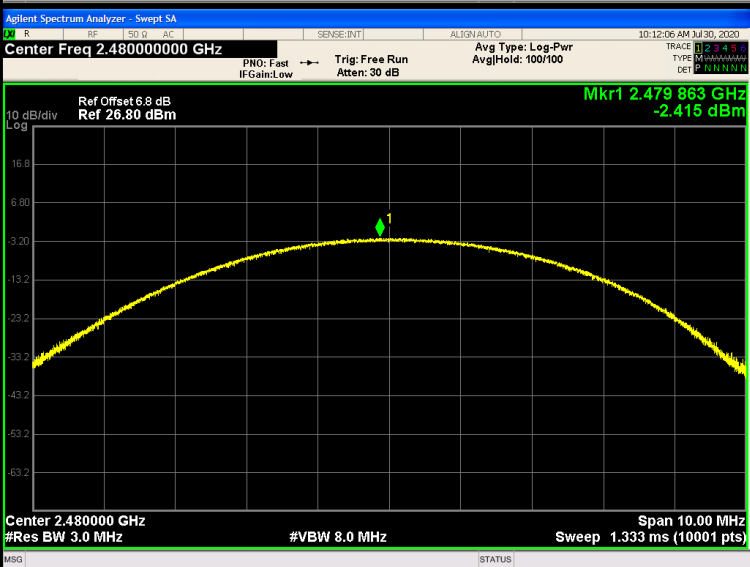$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.76 dB Ref 26.76 dBm Mkr1 2.402 314 GHz -0.571 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.83 dB Ref 26.83 dBm Mkr1 2.440 816 GHz -1.167 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr1 2.479 863 GHz -2.415 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)

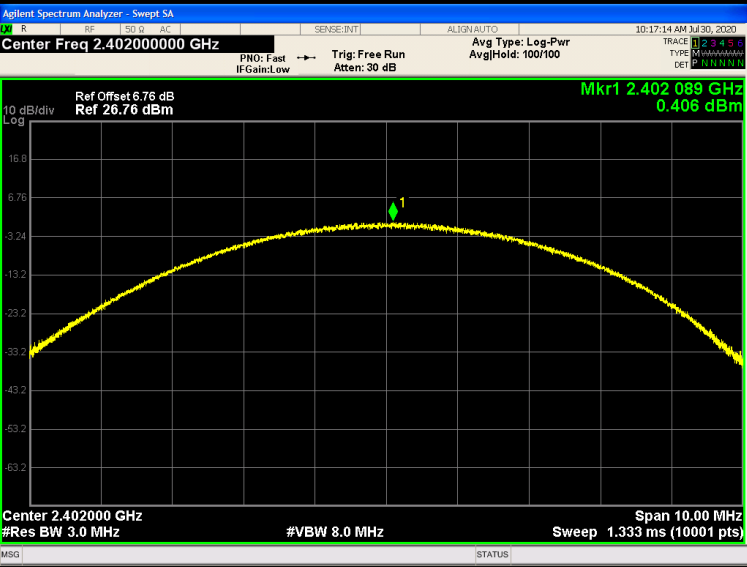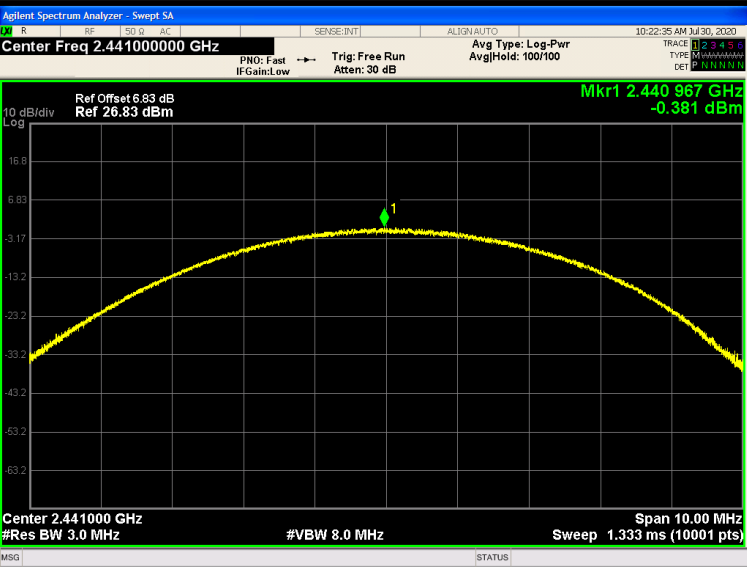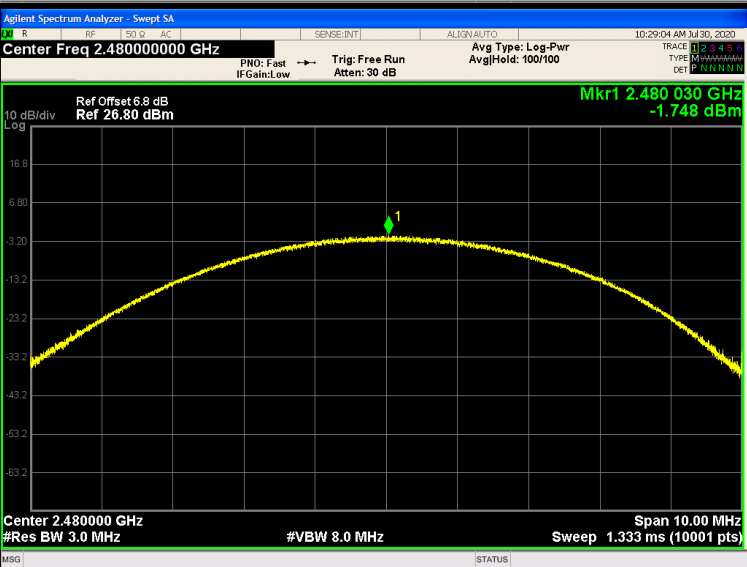8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

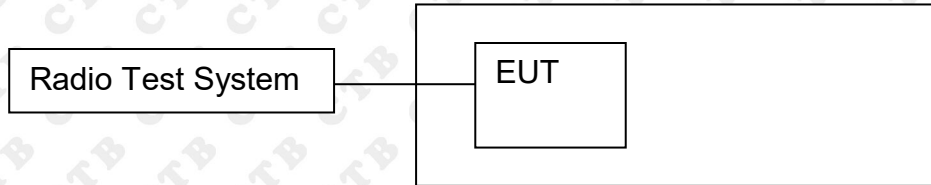

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure




1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result




Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.9244	PASS
	Mid channel	0.9256	PASS
	High channel	0.9117	PASS
$\pi/4$ DQPSK	Low channel	1.3223	PASS
	Mid channel	1.3161	PASS
	High channel	1.3087	PASS
8DPSK	Low channel	1.3027	PASS
	Mid channel	1.3011	PASS
	High channel	1.3147	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

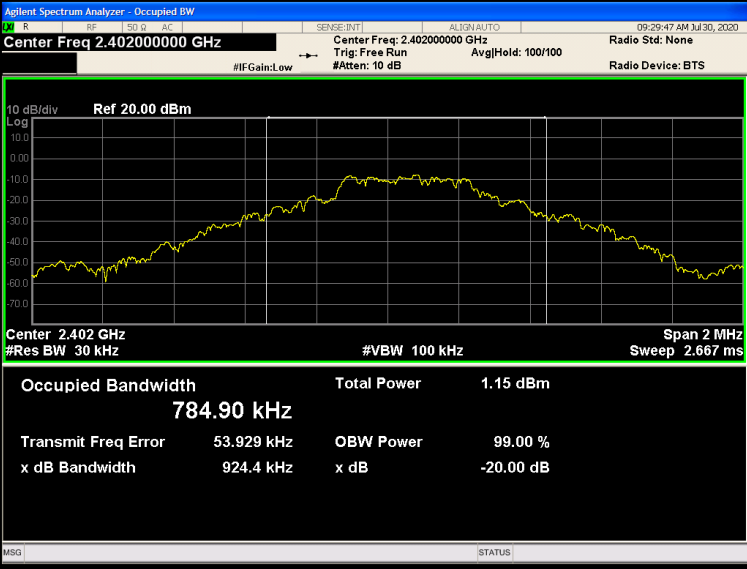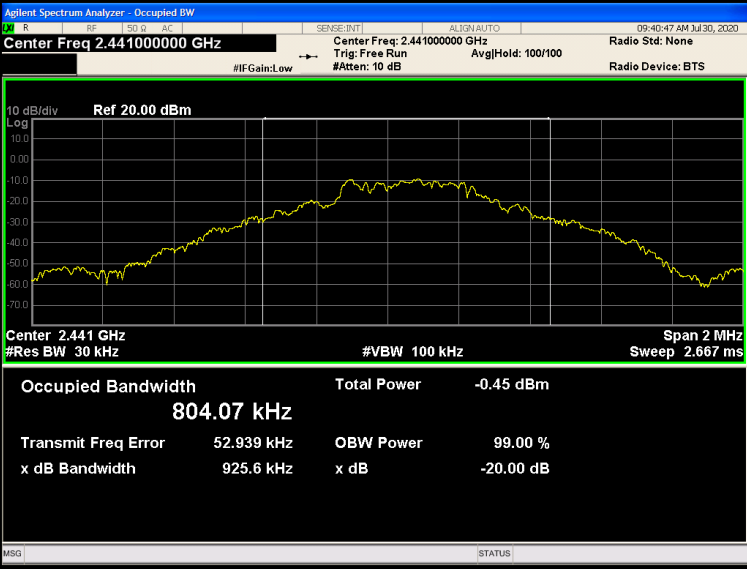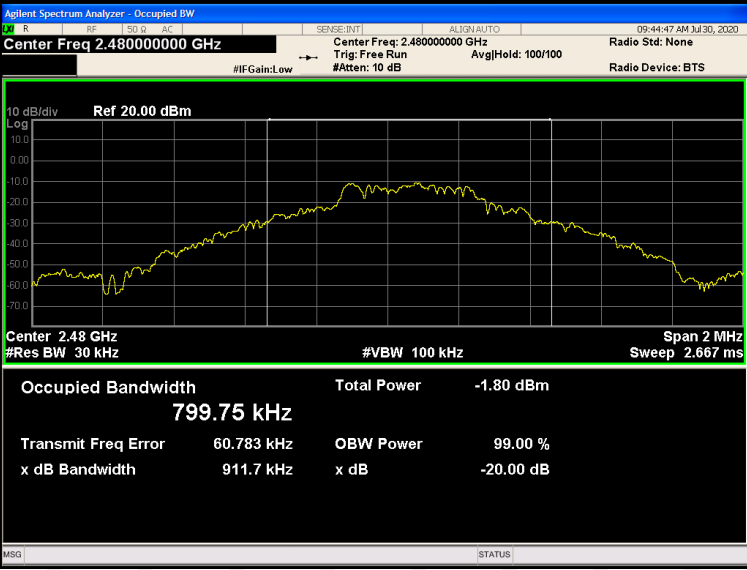
GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 10 dB 10 dB/div Ref 20.00 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 784.90 kHz Total Power 1.15 dBm Transmit Freq Error 53.929 kHz OBW Power 99.00 % x dB Bandwidth 924.4 kHz x dB -20.00 dB MSG STATUS
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 10 dB 10 dB/div Ref 20.00 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 804.07 kHz Total Power -0.45 dBm Transmit Freq Error 52.939 kHz OBW Power 99.00 % x dB Bandwidth 925.6 kHz x dB -20.00 dB MSG STATUS
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 10 dB 10 dB/div Ref 20.00 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 799.75 kHz Total Power -1.80 dBm Transmit Freq Error 60.783 kHz OBW Power 99.00 % x dB Bandwidth 911.7 kHz x dB -20.00 dB MSG STATUS

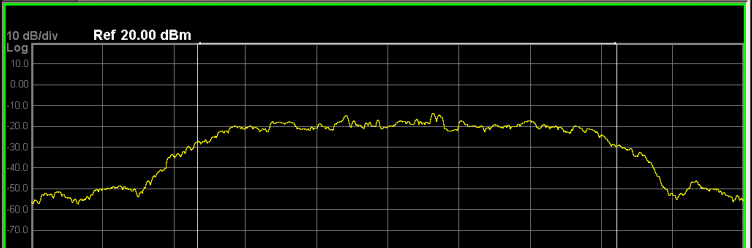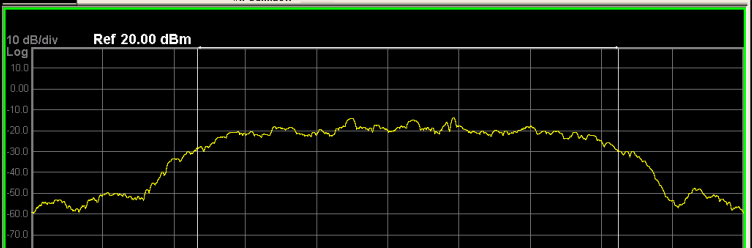$\pi/4$-DQPSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm  Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>1.1781 MHz</td><td>-3.99 dBm</td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td></tr><tr><td>54.594 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>1.322 MHz</td><td>-20.00 dB</td></tr></table> MSG (STATUS)	Occupied Bandwidth	Total Power	1.1781 MHz	-3.99 dBm	Transmit Freq Error	OBW Power	54.594 kHz	99.00 %	x dB Bandwidth	x dB	1.322 MHz	-20.00 dB
Occupied Bandwidth	Total Power												
1.1781 MHz	-3.99 dBm												
Transmit Freq Error	OBW Power												
54.594 kHz	99.00 %												
x dB Bandwidth	x dB												
1.322 MHz	-20.00 dB												
$\pi/4$-DQPSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm  Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>1.1796 MHz</td><td>-4.08 dBm</td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td></tr><tr><td>57.324 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>1.316 MHz</td><td>-20.00 dB</td></tr></table> MSG (STATUS)	Occupied Bandwidth	Total Power	1.1796 MHz	-4.08 dBm	Transmit Freq Error	OBW Power	57.324 kHz	99.00 %	x dB Bandwidth	x dB	1.316 MHz	-20.00 dB
Occupied Bandwidth	Total Power												
1.1796 MHz	-4.08 dBm												
Transmit Freq Error	OBW Power												
57.324 kHz	99.00 %												
x dB Bandwidth	x dB												
1.316 MHz	-20.00 dB												
$\pi/4$-DQPSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 10 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm  Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>1.1666 MHz</td><td>-5.04 dBm</td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td></tr><tr><td>55.194 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>1.309 MHz</td><td>-20.00 dB</td></tr></table> MSG (STATUS)	Occupied Bandwidth	Total Power	1.1666 MHz	-5.04 dBm	Transmit Freq Error	OBW Power	55.194 kHz	99.00 %	x dB Bandwidth	x dB	1.309 MHz	-20.00 dB
Occupied Bandwidth	Total Power												
1.1666 MHz	-5.04 dBm												
Transmit Freq Error	OBW Power												
55.194 kHz	99.00 %												
x dB Bandwidth	x dB												
1.309 MHz	-20.00 dB												

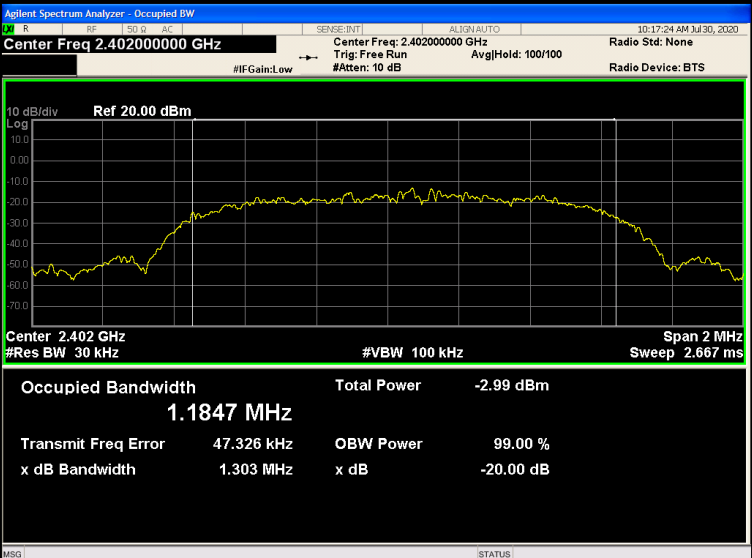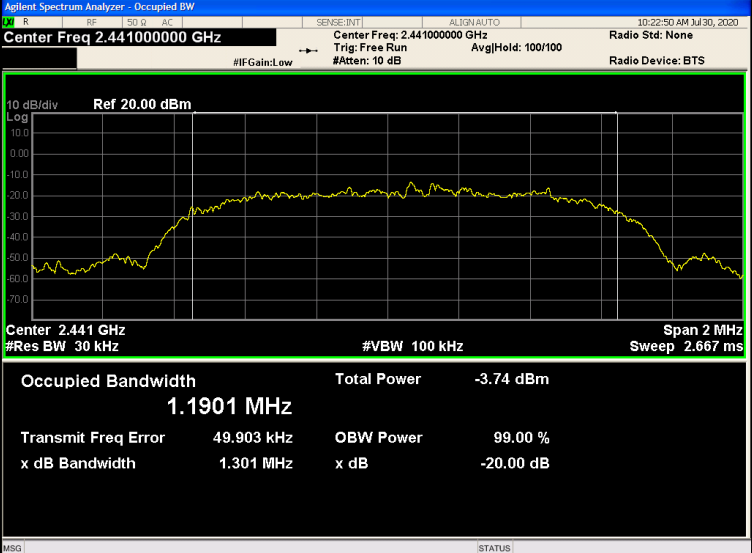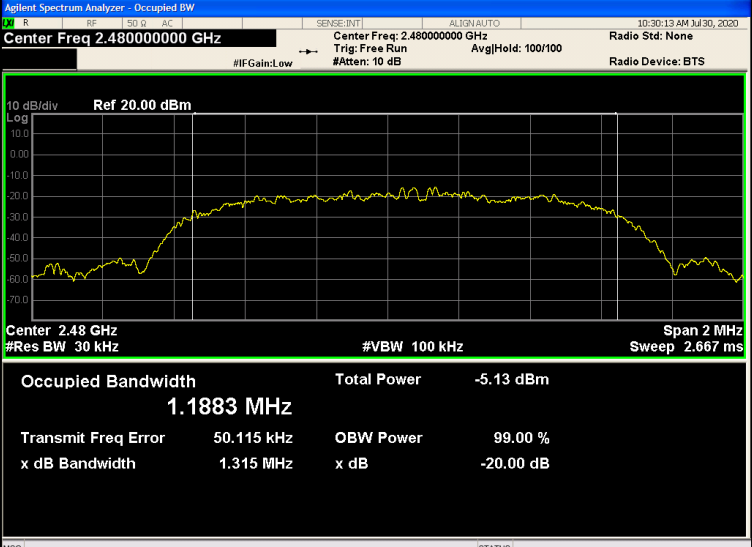8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Res BW: 30 kHz Span: 2 MHz Occupied Bandwidth: 1.1847 MHz Total Power: -2.99 dBm Transmit Freq Error: 47.326 kHz OBW Power: 99.00 % x dB Bandwidth: 1.303 MHz x dB: -20.00 dB
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Res BW: 30 kHz Span: 2 MHz Occupied Bandwidth: 1.1901 MHz Total Power: -3.74 dBm Transmit Freq Error: 49.903 kHz OBW Power: 99.00 % x dB Bandwidth: 1.301 MHz x dB: -20.00 dB
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Res BW: 30 kHz Span: 2 MHz Occupied Bandwidth: 1.1883 MHz Total Power: -5.13 dBm Transmit Freq Error: 50.115 kHz OBW Power: 99.00 % x dB Bandwidth: 1.315 MHz x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

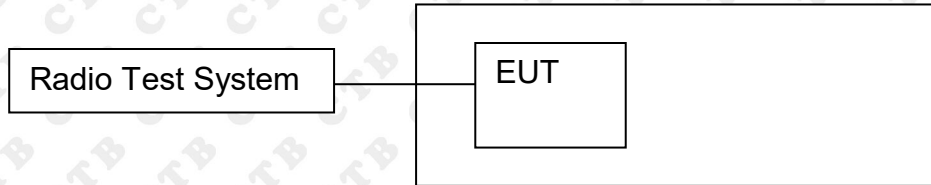

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.010	PASS
GFSK	MCH	1.012	PASS
GFSK	HCH	1.004	PASS
$\pi/4$ DQPSK	LCH	0.956	PASS
$\pi/4$ DQPSK	MCH	1.012	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS
8DPSK	LCH	1.010	PASS
8DPSK	MCH	1.006	PASS
8DPSK	HCH	1.010	PASS

Test Graph

Graphs

GFSK/LCH



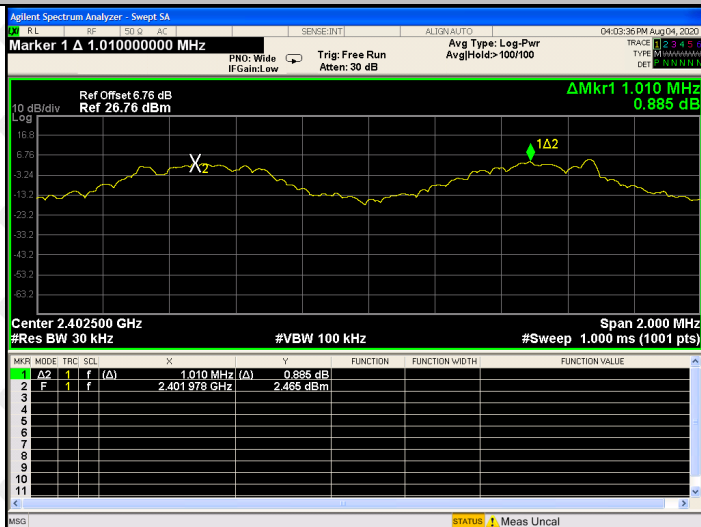


GFSK/MCH




GFSK/HCH

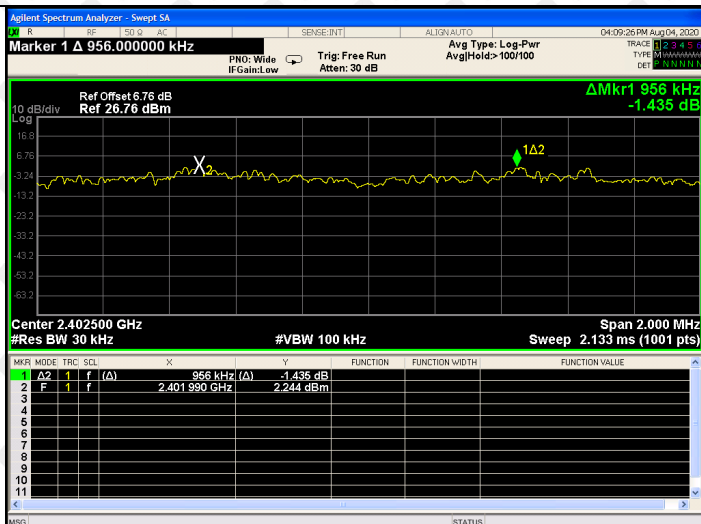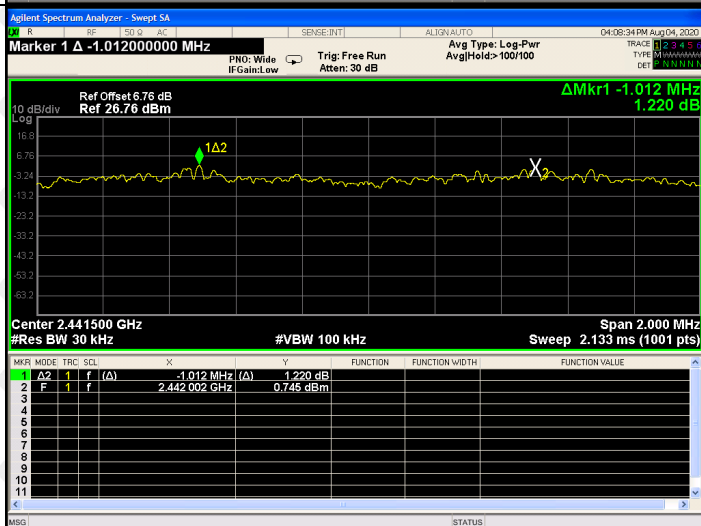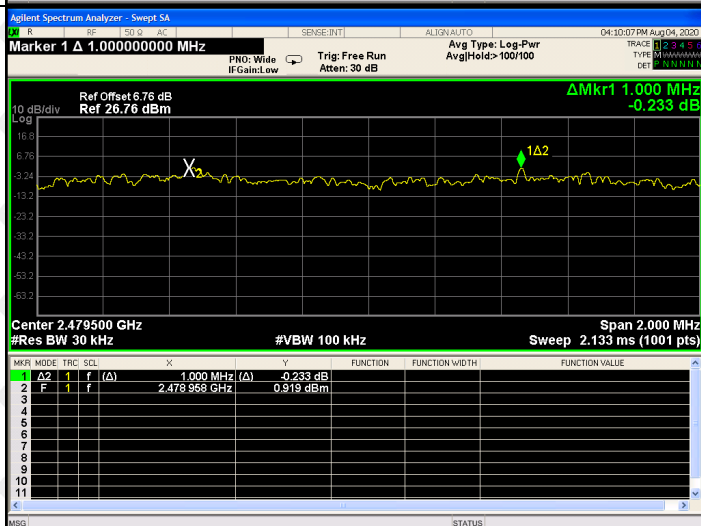


$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

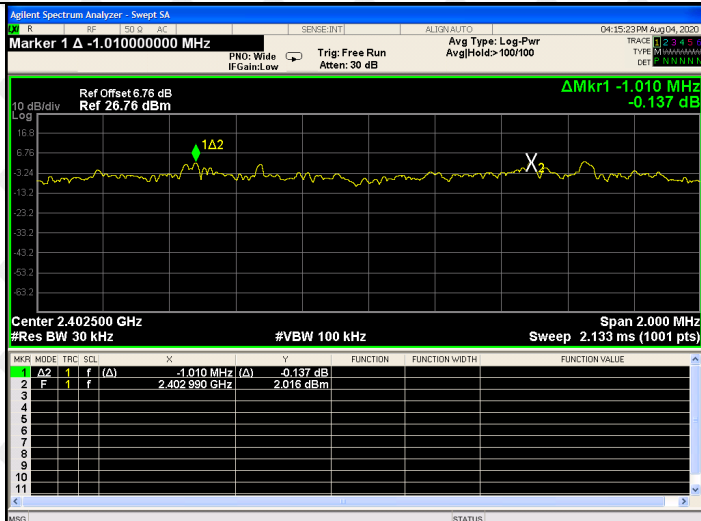 $\pi/4$ DQPSK/HCH


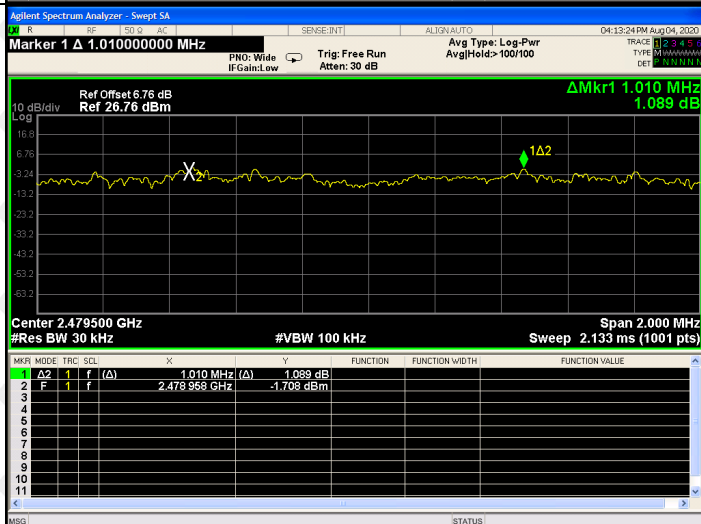
8DPSK/LCH

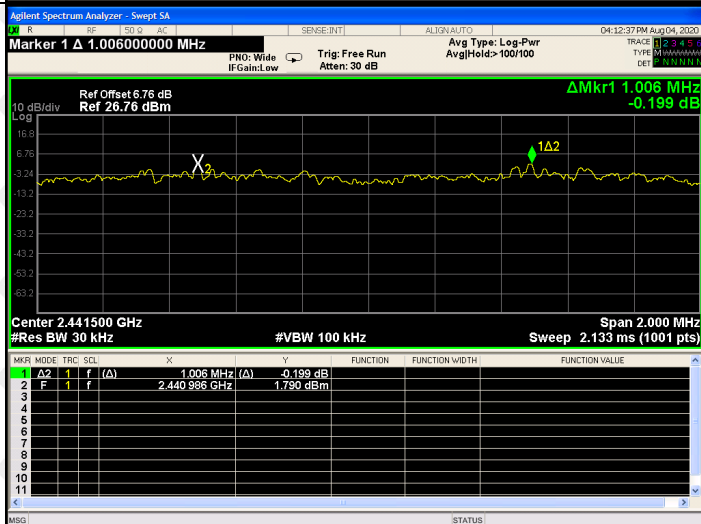

8DPSK/MCH




8DPSK/HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

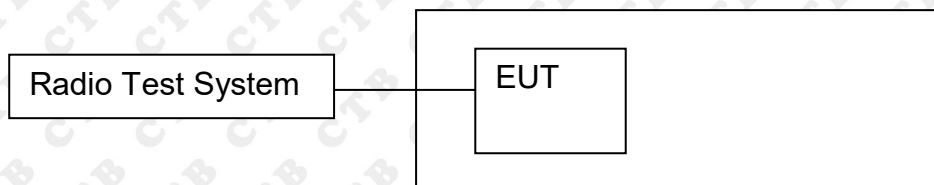

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

Graphs


GFSK/Hop

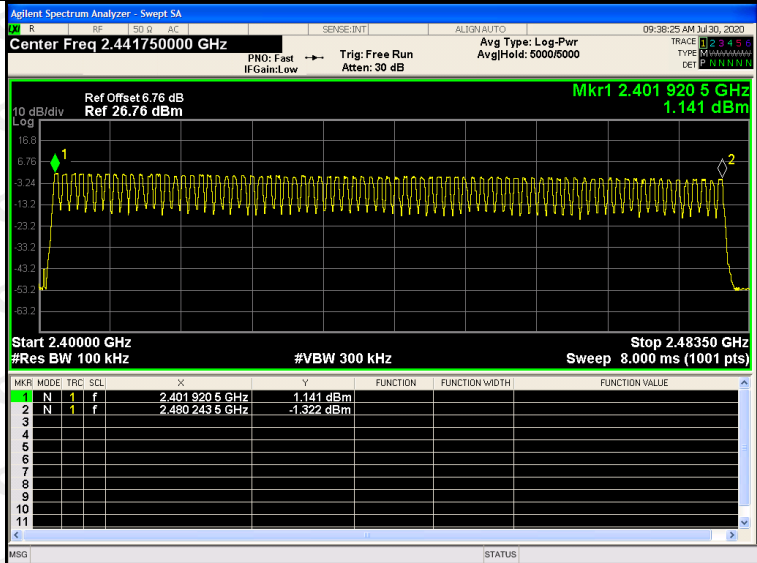

π /4QPSK/Hop

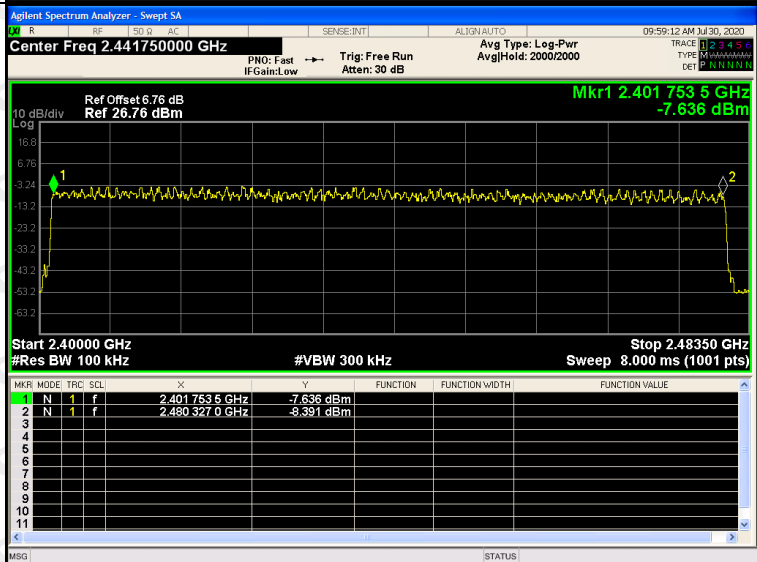


8DPSK/Hop

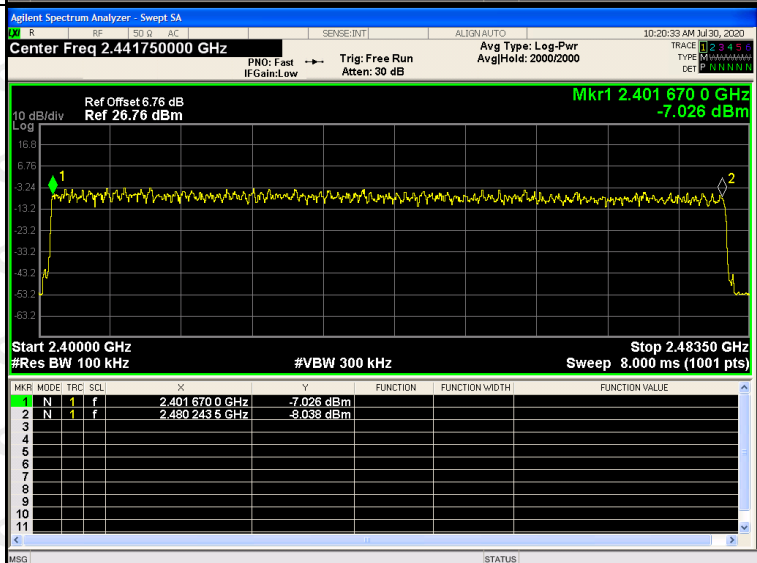

13. DWELL TIME

13.1 Block Diagram Of Test Setup

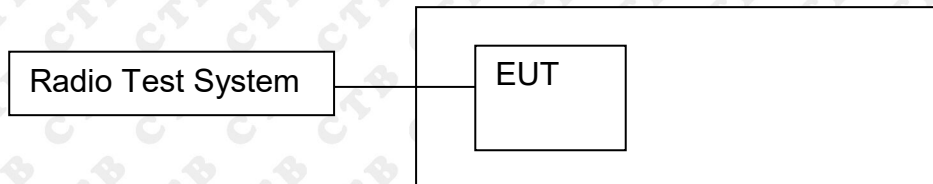

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.385	121.628	400	PASS
	DH1	MCH	0.385	121.723	400	PASS
	DH1	HCH	0.385	121.723	400	PASS
	DH3	LCH	1.645	259.942	400	PASS
	DH3	MCH	1.646	259.989	400	PASS
	DH3	HCH	1.645	259.989	400	PASS
	DH5	LCH	2.896	274.541	400	PASS
	DH5	MCH	2.896	274.541	400	PASS
	DH5	HCH	2.896	274.541	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

Graphs


GFSK_DH1/LCH

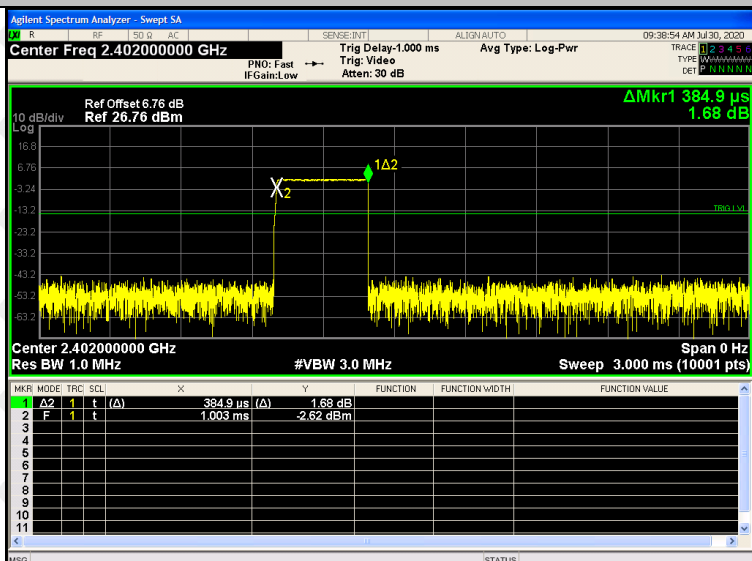


GFSK_DH1/MCH

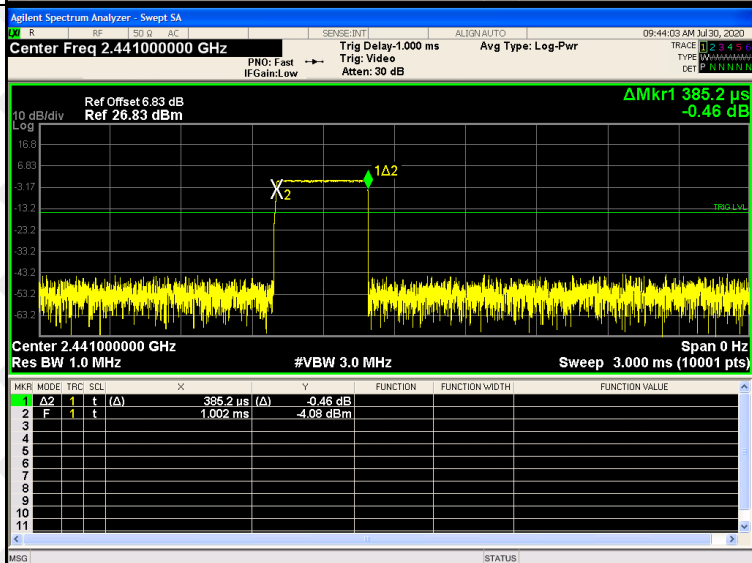


GFSK_DH1/HCH

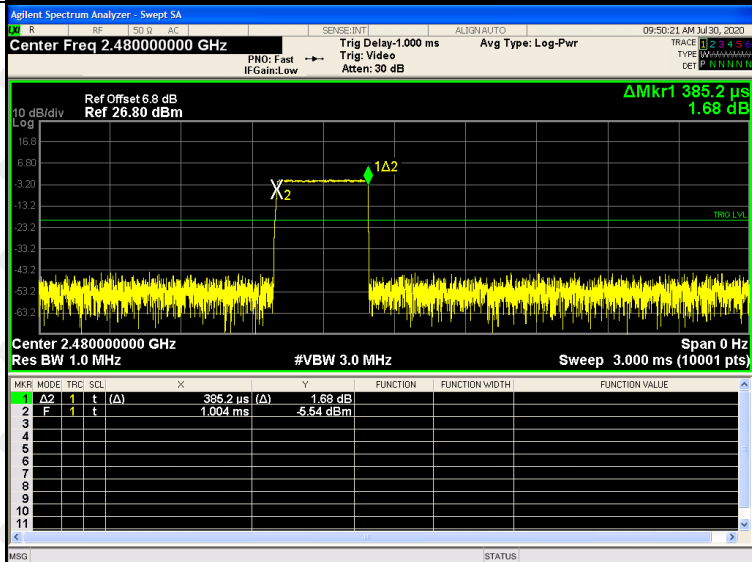


GFSK_DH3/LCH

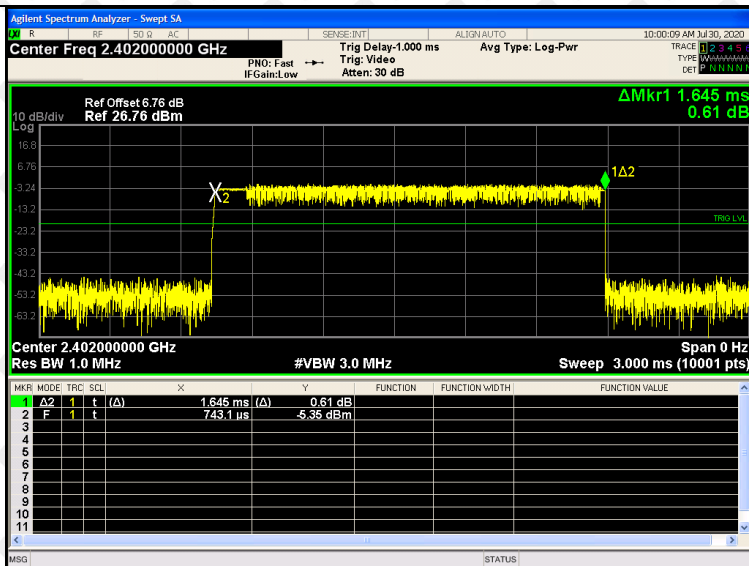


GFSK_DH3/MCH

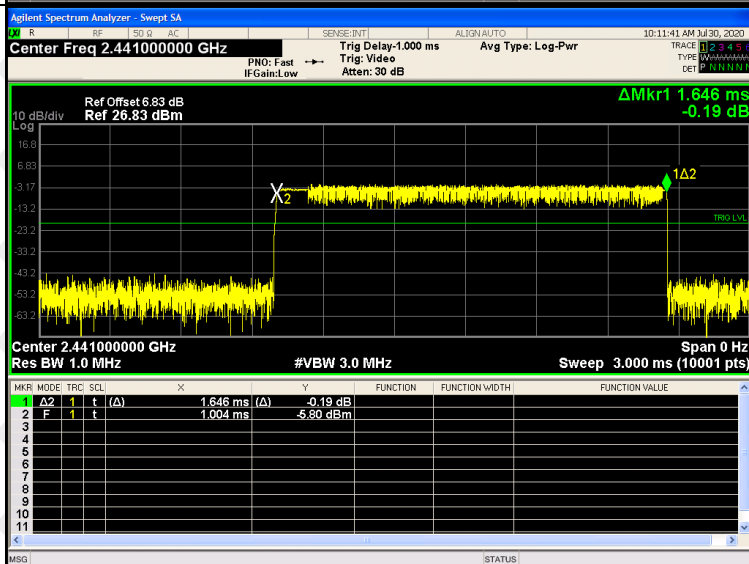


GFSK_DH3/HCH

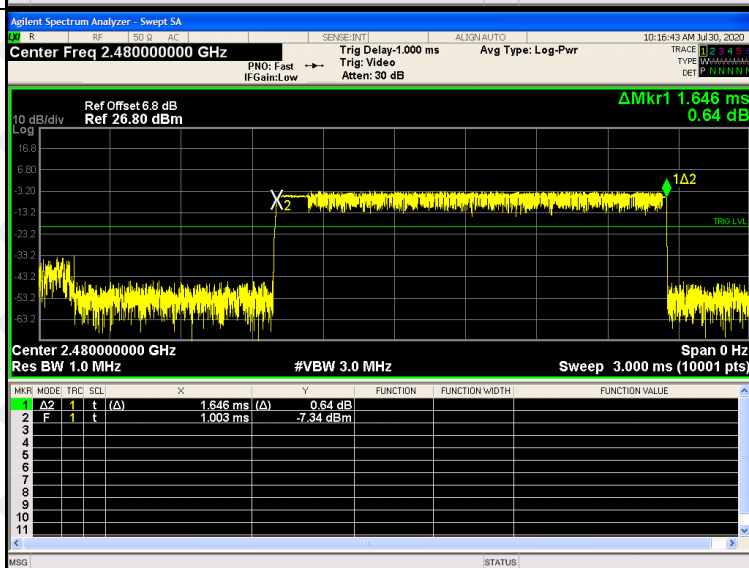


GFSK_DH5/LCH

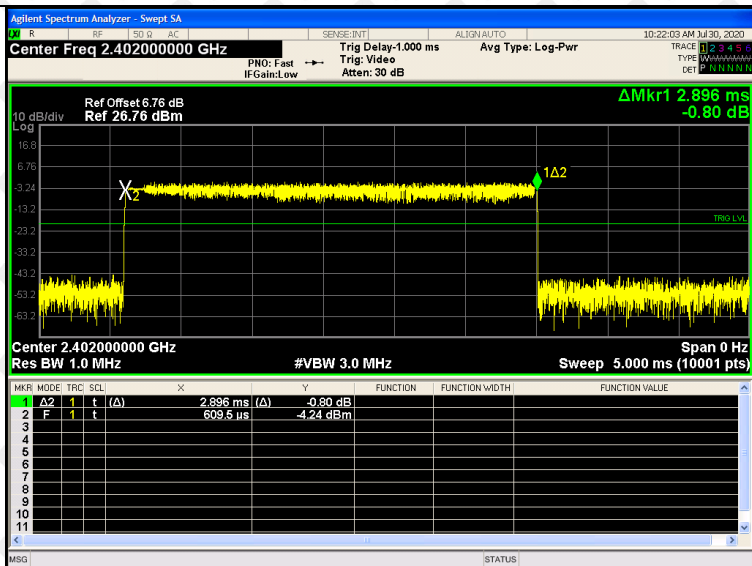

GFSK_DH5/MCH

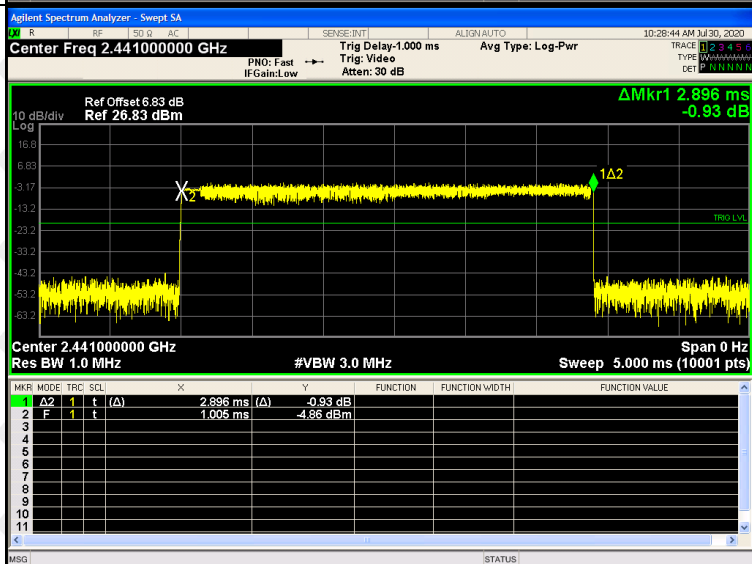

GFSK_DH5/HCH

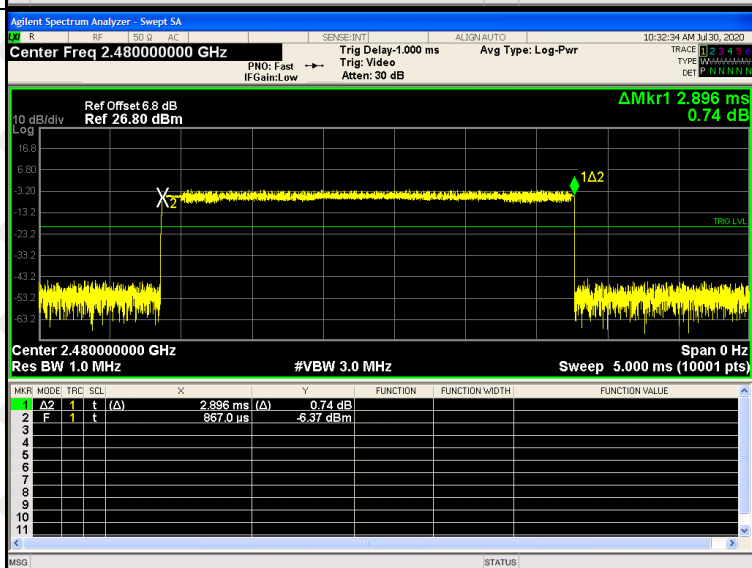

14. PSEUDORANDOM FREQUENCY


14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

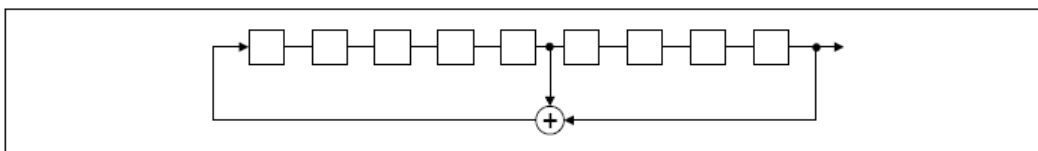

An example of Pseudorandom Frequency Hopping Sequence as follow:

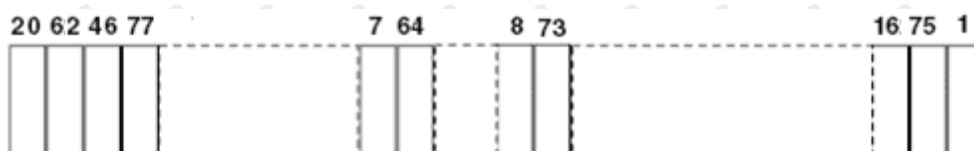

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 0dBi.


ANT.

16. EUT PHOTOGRAPHS

EUT Photo 1

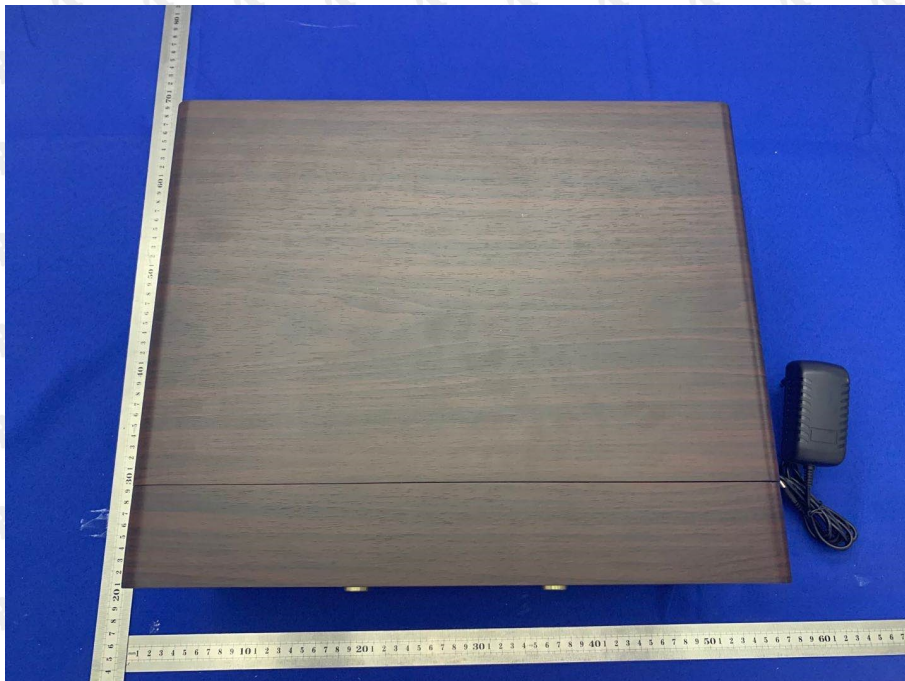


EUT Photo 2

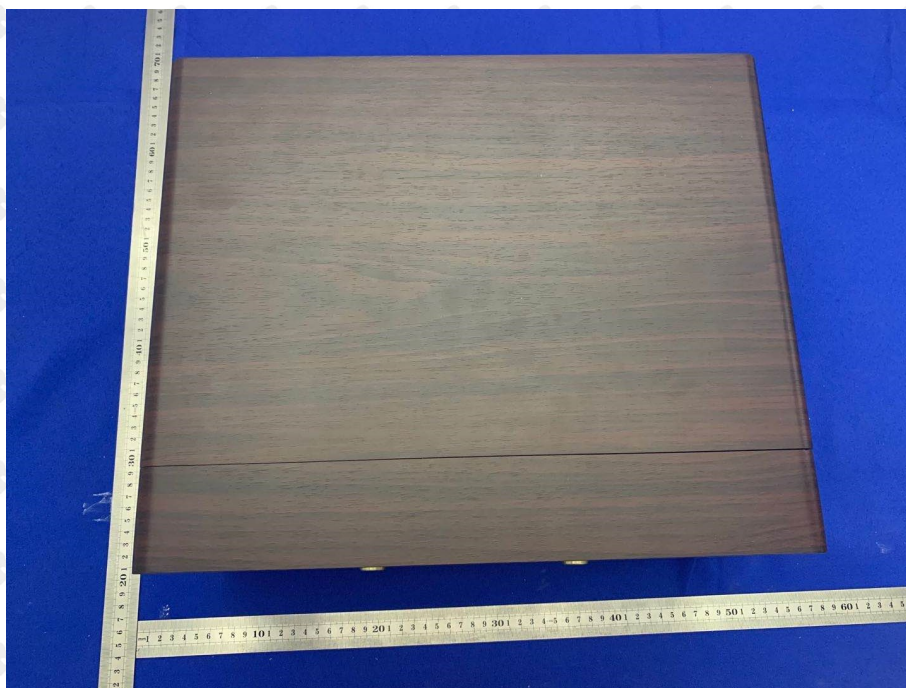


17. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

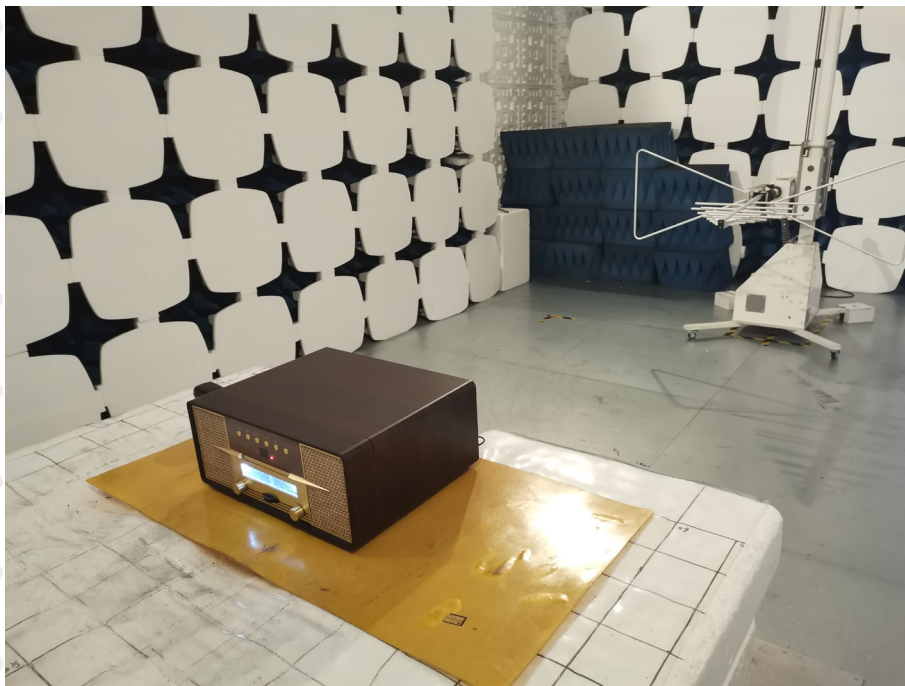

Above 1G

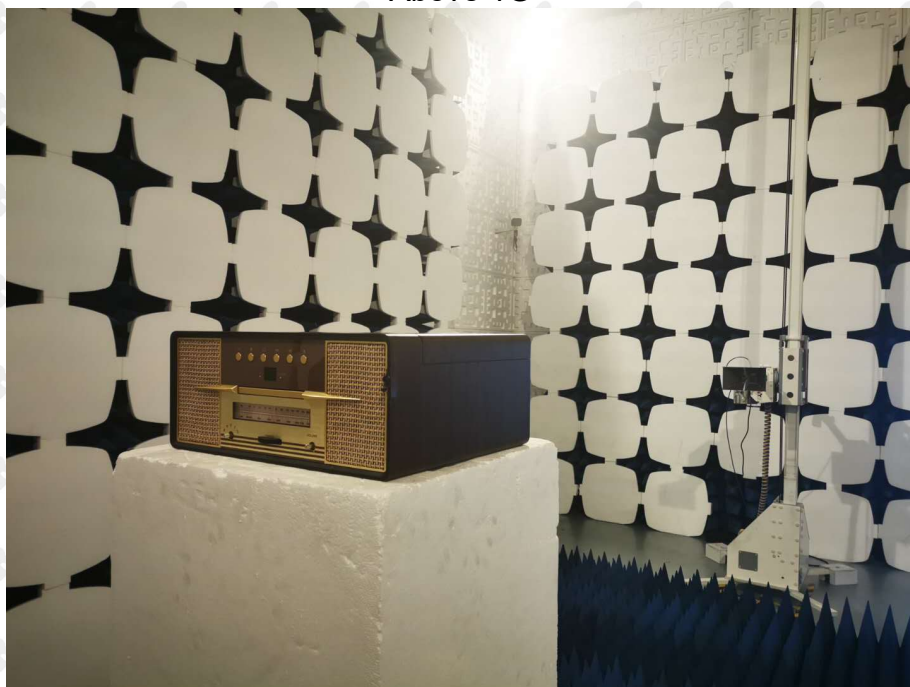

Conducted Emission



***** END OF REPORT *****