

Product specification

Quick Reference Date


Shenzhen Bluetrum Technology Co., Ltd.

	Antenna module on the system board	
Antenna type	PCB	
Frequency	2.400-2.500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr ?loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.7 (Peak Gain)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	

All the technical data and information contained herein are subject to change without prior notice

Manufacture : Shenzhen Bluetrum Technology Co., Ltd.

Antenna Layout & module on the system board

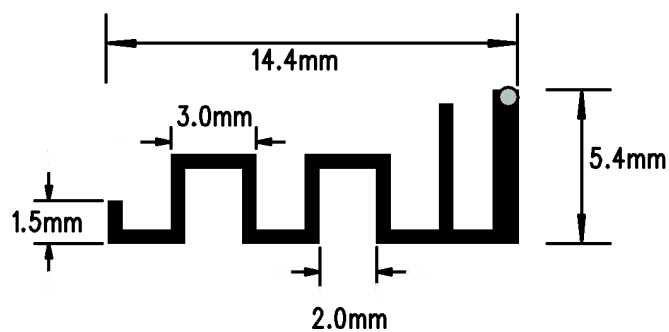


Antenna Gain



Gain Table

Frequency (MHz)	2400		2450		2500		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Gain(dBi)	1.3	-0.5	1.7	-3.8	1.1	-3.0	58.5%


Return Loss

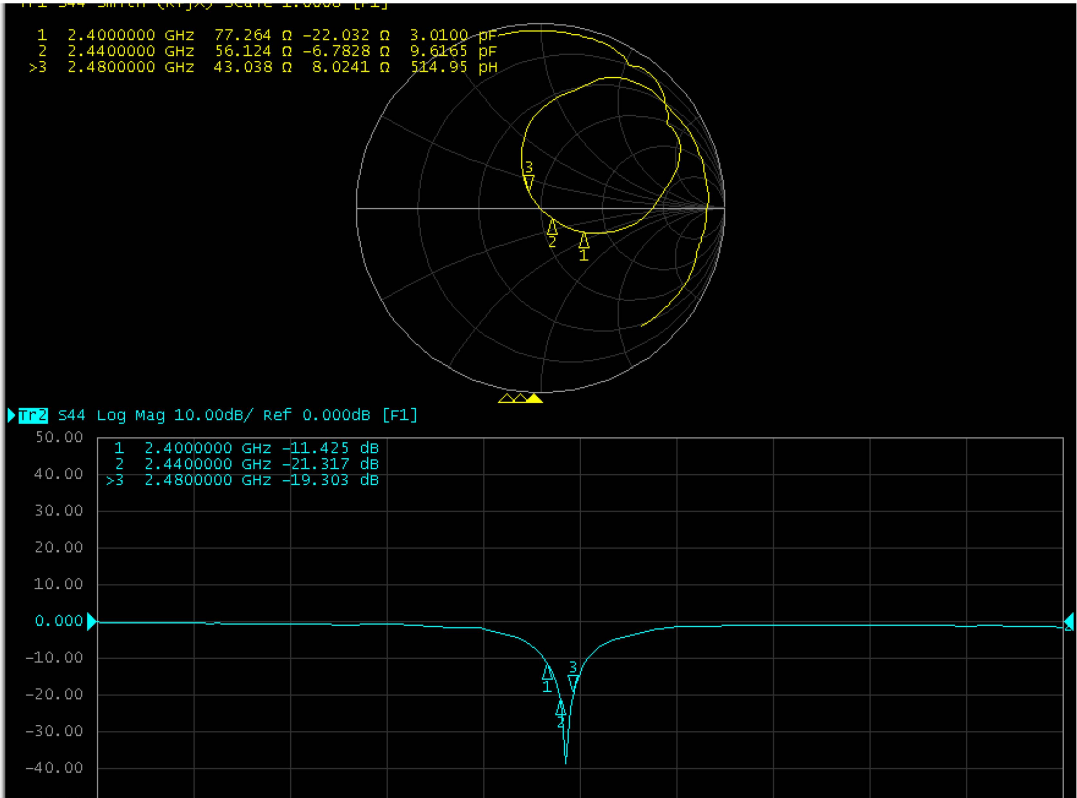

The Environment of Antenna Radiation Pattern

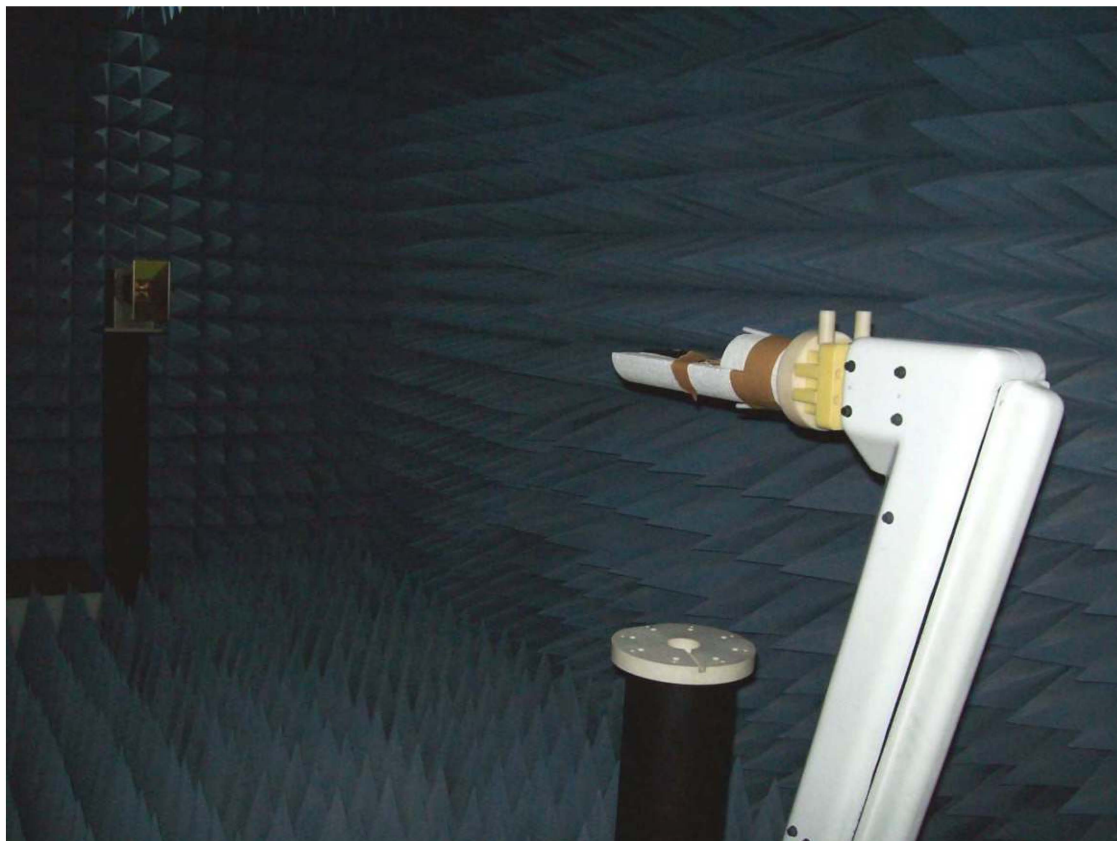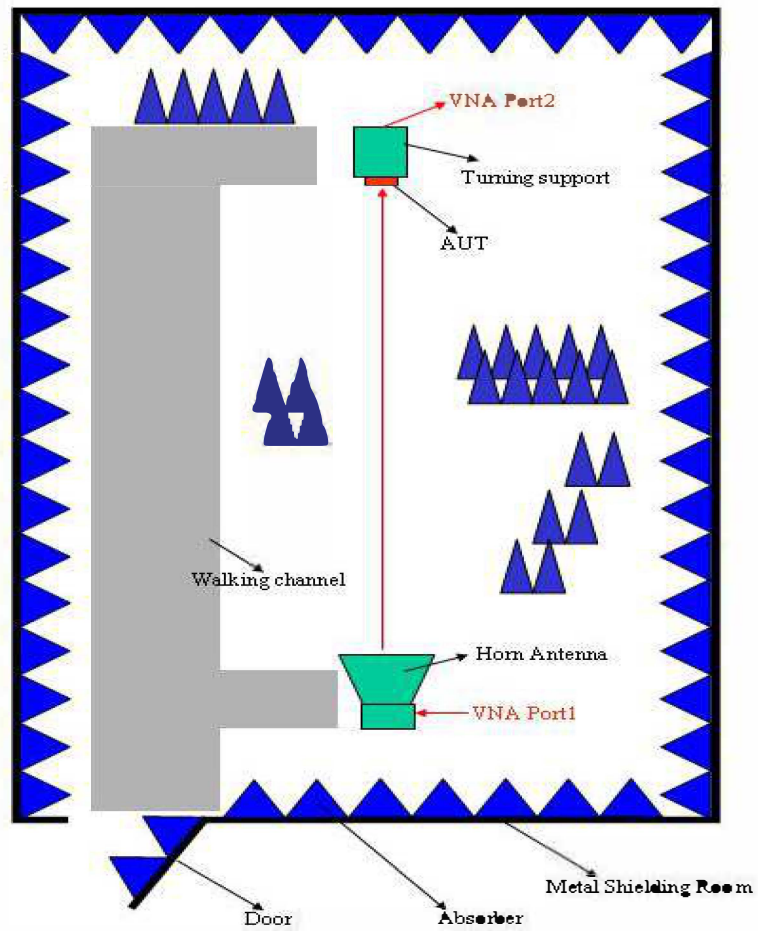


3D radiation pattern diagram

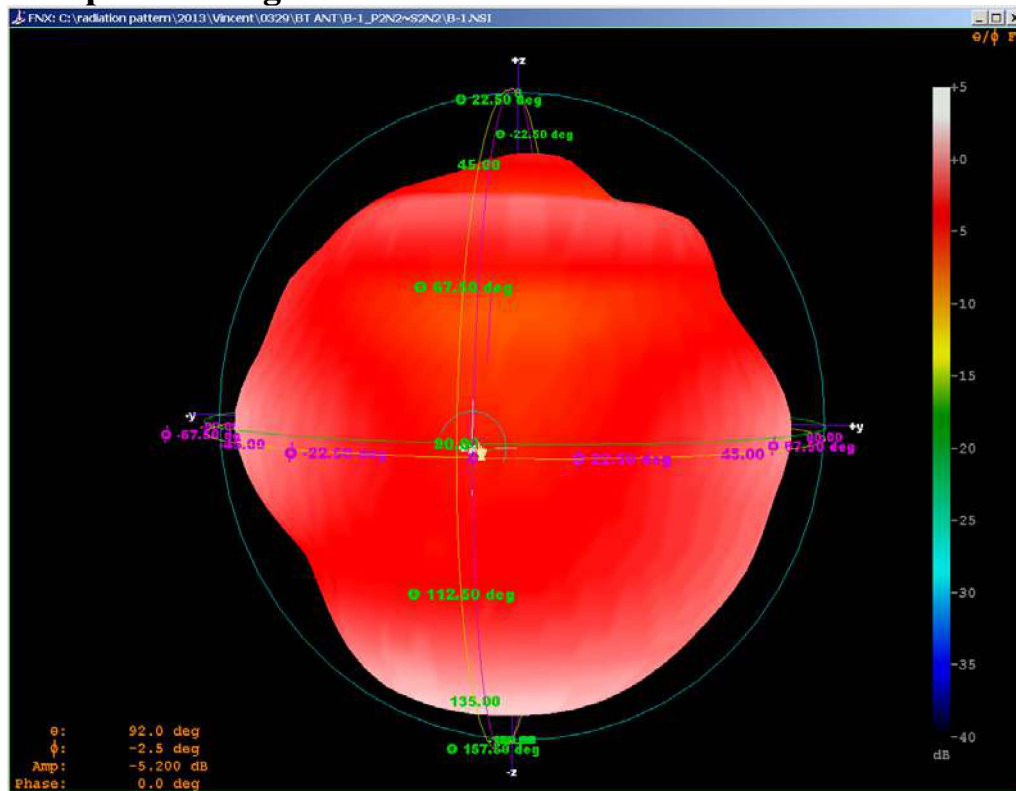


XY-plane

Far-field Power Distribution(E+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dBi, Plot Avg Gain(H+V)= -0.88 dBi @ 2.4000 GHz

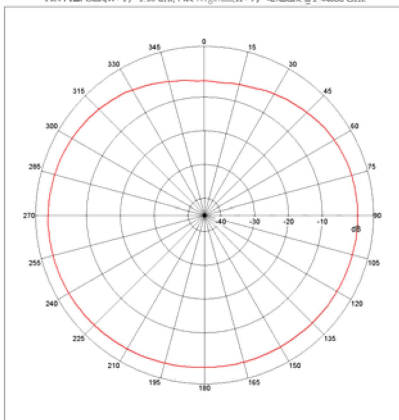

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane

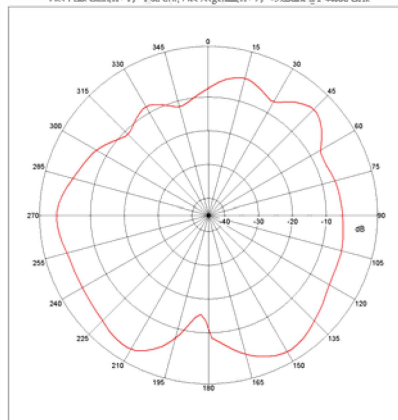

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 11.1 dBi; Plot AvgGain(H+V)= -2.99dBi @2.48000 GHz

