

EXHIBIT 6

INDEX OF SUBMITTED MEASURED DATA

EXHIBIT 6G (Revised) – Radiated Spurious Emissions (12 Graphs):

- 6G-1: Hi-Power, 403.0125 MHz, 12.5 kHz Channel Spacing
- 6G-2: Hi-Power, 454.0125 MHz, 12.5 kHz Channel Spacing
- 6G-3: Hi-Power, 469.9875 MHz, 12.5 kHz Channel Spacing
- 6G-4: Lo-Power, 403.0125 MHz, 12.5 kHz Channel Spacing
- 6G-5: Lo-Power, 454.0125 MHz, 12.5 kHz Channel Spacing
- 6G-6: Lo-Power, 469.9875 MHz, 12.5 kHz Channel Spacing

Exhibit 6-G (Revised)
 Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

Motorola Inc.

FCC ID:AZ489FT4826

Transmit Radiated Spurious Emissions: **PMUE1710D**


@ 10 Meters

Tx Power: 4.8 Watts

403.0125 MHz

Channel Spacing 12.5kHz | S/N WJIKI03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0250	-20	-60.47	-50.74
1209.0375	-20	-52.28	-41.79
1612.0500	-20	-52.51	-54.07
2015.0625	-20	-50.77	-48.41
2418.0750	-20	-50.34	-54.05
2821.0875	-20	-55.96	-56.39
3224.1000	-20	-55.71	-57.56
3627.1125	-20	-52.33	-54.63
4030.1250	-20	-51.83	-48.44

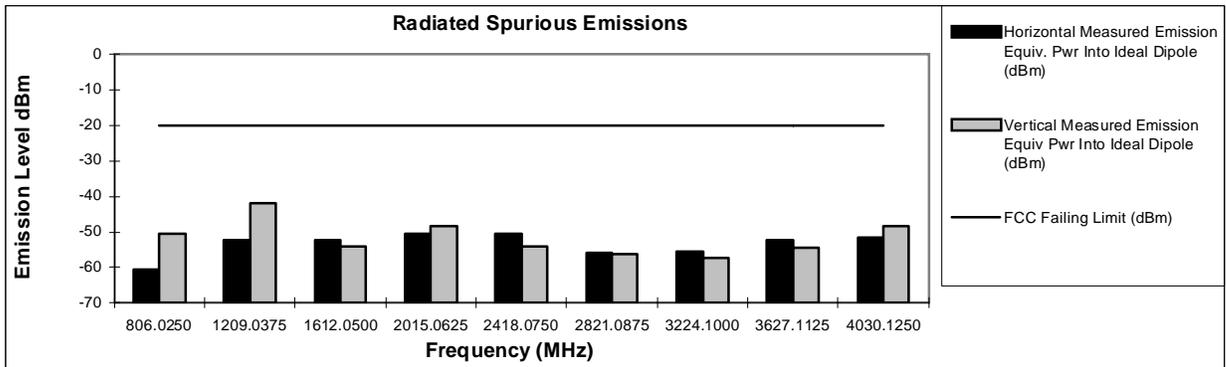

6G-1: Hi-Power, 403.0125 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: PMUE1710D

Tx Power: 4.8 Watts

454.0125 MHz

Channel Spacing 12.5kHz | S/N WJIKI03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0250	-20	-49.39	-50.00
1362.0375	-20	-50.28	-41.14
1816.0500	-20	-49.30	-48.29
2270.0625	-20	-56.48	-58.98
2724.0750	-20	-55.80	-58.74
3178.0875	-20	-58.28	*
3632.1000	-20	-57.53	-56.25
4086.1125	-20	-53.57	*
4540.1250	-20	*	*

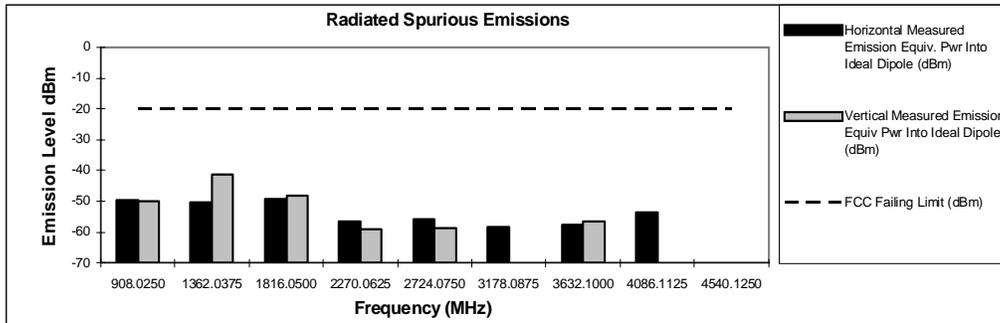

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader
FCC Registration: 91932 / Industry Canada: IC109U-1

April 16, 2009

6G-2: Hi-Power, 454.0125 MHz, 12.5 kHz Channel Spacing

Motorola Inc.

FCC ID:AZ489FT4826

Transmit Radiated Spurious Emissions: PMUE1710D


@ 10 Meters

Tx Power: 4.8 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N WJIKI03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-47.16	-40.95
1409.9625	-20	-51.21	-33.36
1879.9500	-20	-50.27	-51.14
2349.9375	-20	-45.54	-45.29
2819.9250	-20	-50.25	-52.80
3289.9125	-20	-48.55	-51.33
3759.9000	-20	-50.54	-53.23
4229.8875	-20	-46.07	-43.59
4699.8750	-20	-59.27	-51.42

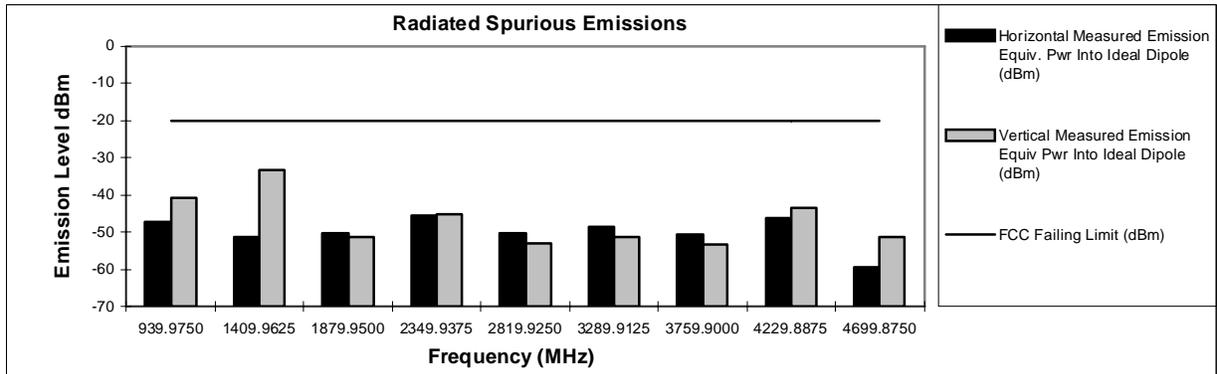

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-3: Hi-Power, 469.9875 MHz, 12.5 kHz Channel Spacing

Motorola Inc.

FCC ID:AZ489FT4826

Transmit Radiated Spurious Emissions: **PMUE1710D**


@ 10 Meters

Tx Power: 1 Watts

403.0125 MHz

Channel Spacing 12.5kHz | S/N WJIKI03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0250	-20	-68.84	-65.16
1209.0375	-20	-64.47	-58.96
1612.0500	-20	-60.86	-60.38
2015.0625	-20	-58.84	-55.87
2418.0750	-20	-54.48	-57.00
2821.0875	-20	-56.51	-57.96
3224.1000	-20	*	*
3627.1125	-20	-59.79	-56.53
4030.1250	-20	*	*

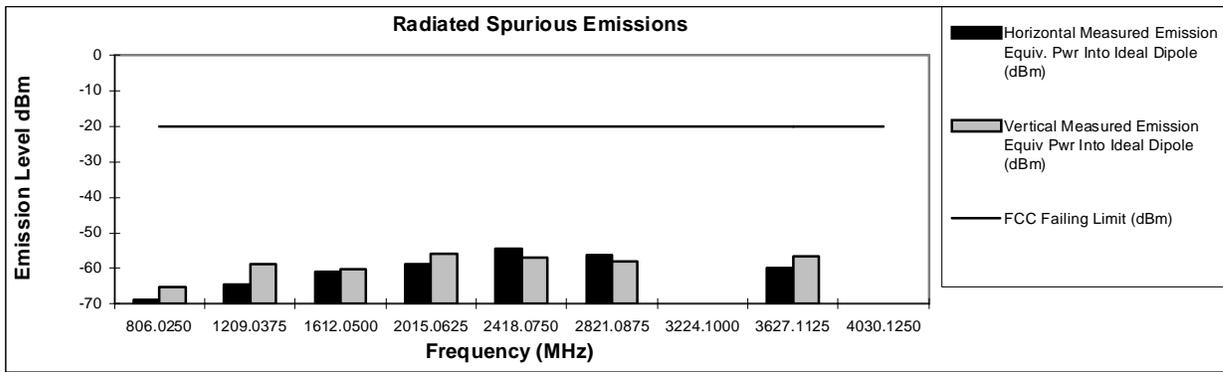

6G-4: Lo-Power, 403.0125 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: PMUE1710D

Tx Power: 1 Watts

454.0125 MHz

Channel Spacing 12.5kHz | S/N WJKI03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0250	-20	-54.04	-52.39
1362.0375	-20	-60.62	-55.59
1816.0500	-20	-52.26	-57.27
2270.0625	-20	-60.86	-63.33
2724.0750	-20	-52.84	-56.42
3178.0875	-20	-62.91	-59.74
3632.1000	-20	-62.53	-59.05
4086.1125	-20	*	*
4540.1250	-20	*	*

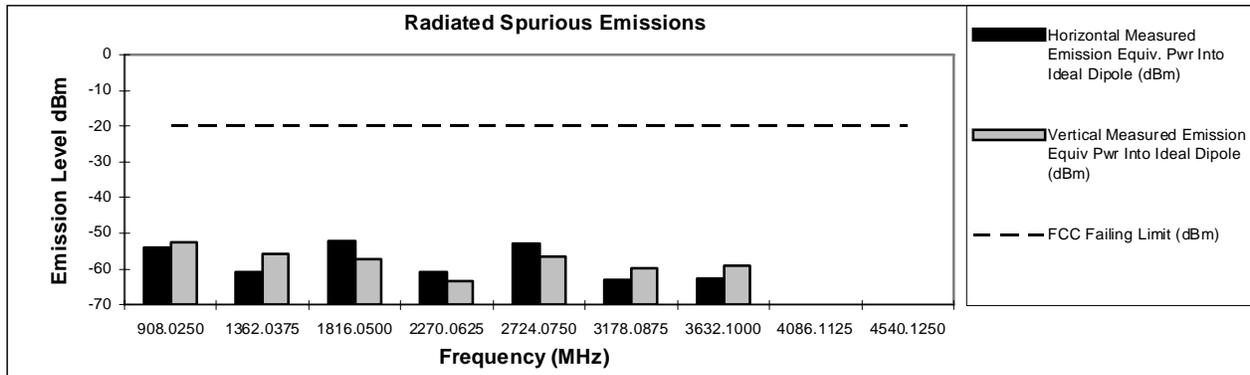

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader
FCC Registration: 91932 / Industry Canada: IC109U-1

April 16, 2009

6G-5: Lo-Power, 454.0125 MHz, 12.5 kHz Channel Spacing

Motorola Inc.

FCC ID:AZ489FT4826

Transmit Radiated Spurious Emissions: PMUE1710D


@ 10 Meters

Tx Power: 1 Watts

469.9875 MHz

Channel Spacing 12.5kHz | S/N WJIK03I

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	*	*
1409.9625	-20	-57.85	-39.85
1879.9500	-20	-50.65	-47.16
2349.9375	-20	-53.01	-46.11
2819.9250	-20	-48.39	-53.68
3289.9125	-20	-44.88	-47.97
3759.9000	-20	-52.66	-53.14
4229.8875	-20	-44.82	-42.72
4699.8750	-20	-58.13	-51.10

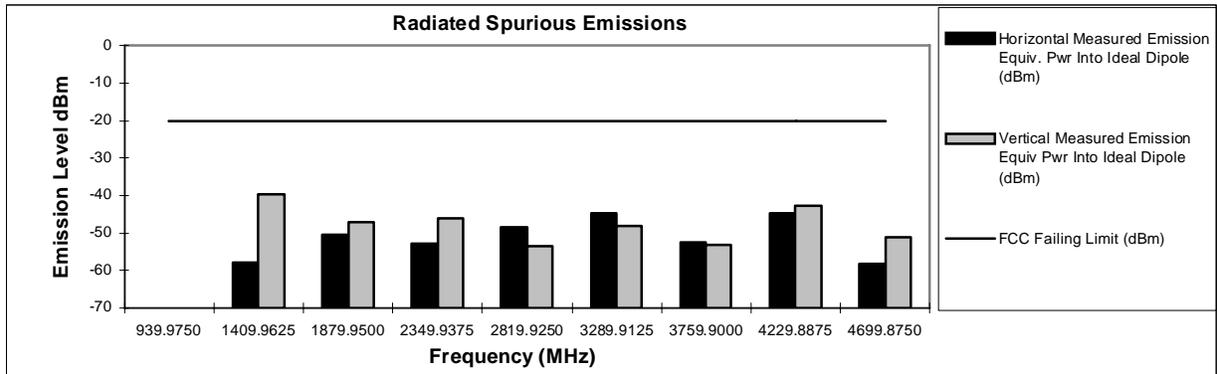

6G-6: Lo-Power, 469.9875 MHz, 12.5 kHz Channel Spacing