

EXHIBIT 6

INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6I (Revised) – Conducted Spurious Emissions (12 Tables):

- 6I-1: Hi-Power Harmonic of Carrier 450.525 MHz, 25 kHz Channel Spacing
- 6I-2: Hi-Power Harmonic of Carrier 488.525 MHz, 25 kHz Channel Spacing
- 6I-3: Hi-Power Harmonic of Carrier 526.525 MHz, 25 kHz Channel Spacing
- 6I-4: Lo-Power Harmonic of Carrier 450.525 MHz, 25 kHz Channel Spacing
- 6I-5: Lo-Power Harmonic of Carrier 488.525 MHz, 25 kHz Channel Spacing
- 6I-6: Lo-Power Harmonic of Carrier 526.525 MHz, 25 kHz Channel Spacing
- 6I-7: Hi-Power Harmonic of Carrier 450.525 MHz, 12.5 kHz Channel Spacing
- 6I-8: Hi-Power Harmonic of Carrier 488.525 MHz, 12.5 kHz Channel Spacing
- 6I-9: Hi-Power Harmonic of Carrier 526.525 MHz, 12.5 kHz Channel Spacing
- 6I-10: Lo-Power Harmonic of Carrier 450.525 MHz, 12.5 kHz Channel Spacing
- 6I-11: Lo-Power Harmonic of Carrier 488.525 MHz, 12.5 kHz Channel Spacing
- 6I-12: Lo-Power Harmonic of Carrier 526.525 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6G (Revised) – Radiated Spurious Emissions (12 Graphs):

- 6G-1: Hi-Power, 450.525 MHz, 25 kHz Channel Spacing
& Hi-Power, 488.525 MHz, 25 kHz Channel Spacing
- 6G-2: Hi-Power, 526.525 MHz, 25 kHz Channel Spacing
- 6G-3: Lo-Power, 450.525 MHz, 25 kHz Channel Spacing
& Lo-Power, 488.525 MHz, 25 kHz Channel Spacing
- 6G-4: Lo-Power, 526.525 MHz, 25 kHz Channel Spacing
- 6G-5: Hi-Power, 450.525 MHz, 12.5 kHz Channel Spacing
& Hi-Power, 488.525 MHz, 12.5 kHz Channel Spacing
- 6G-6: Hi-Power, 526.525 MHz, 12.5 kHz Channel Spacing
- 6G-7: Lo-Power, 450.525 MHz, 12.5 kHz Channel Spacing
& Lo-Power, 488.525 MHz, 12.5 kHz Channel Spacing
- 6G-8: Lo-Power, 526.525 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6I (Revised)
Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

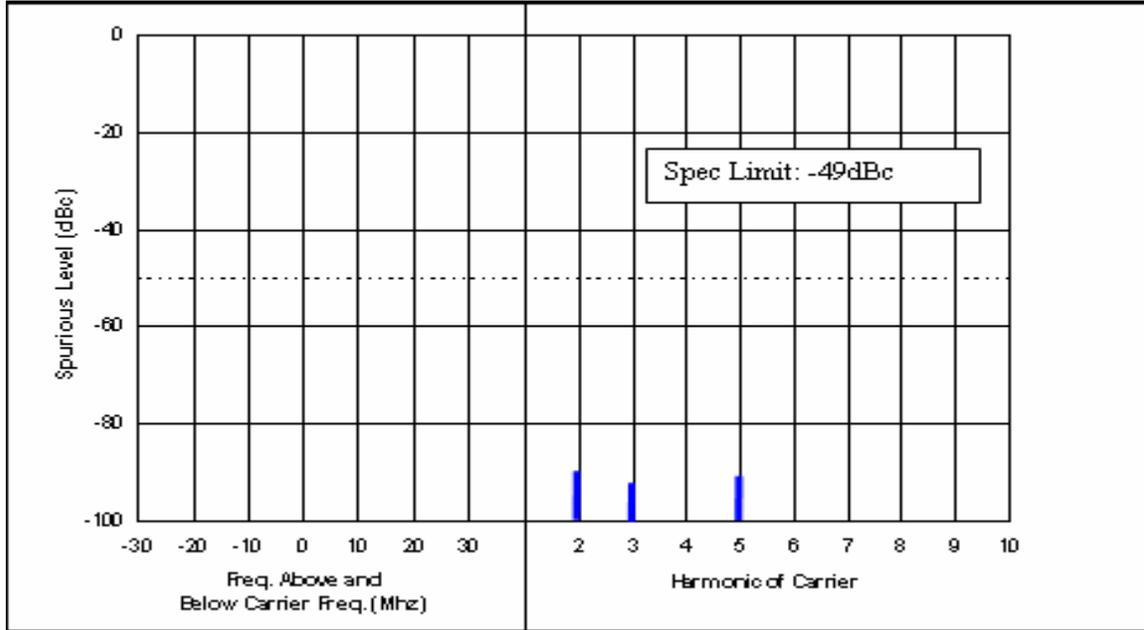


Table 6I-1: Hi-Power Harmonic of Carrier 450.525 MHz, 25 kHz Channel Spacing

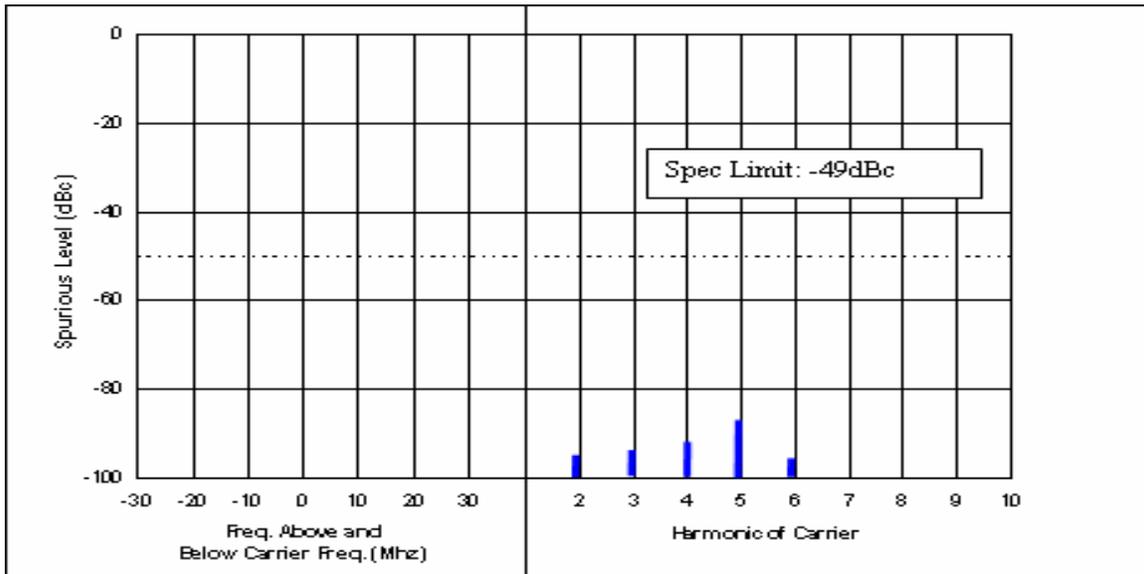


Table 6I-2: Hi-Power Harmonic of Carrier 488.525 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

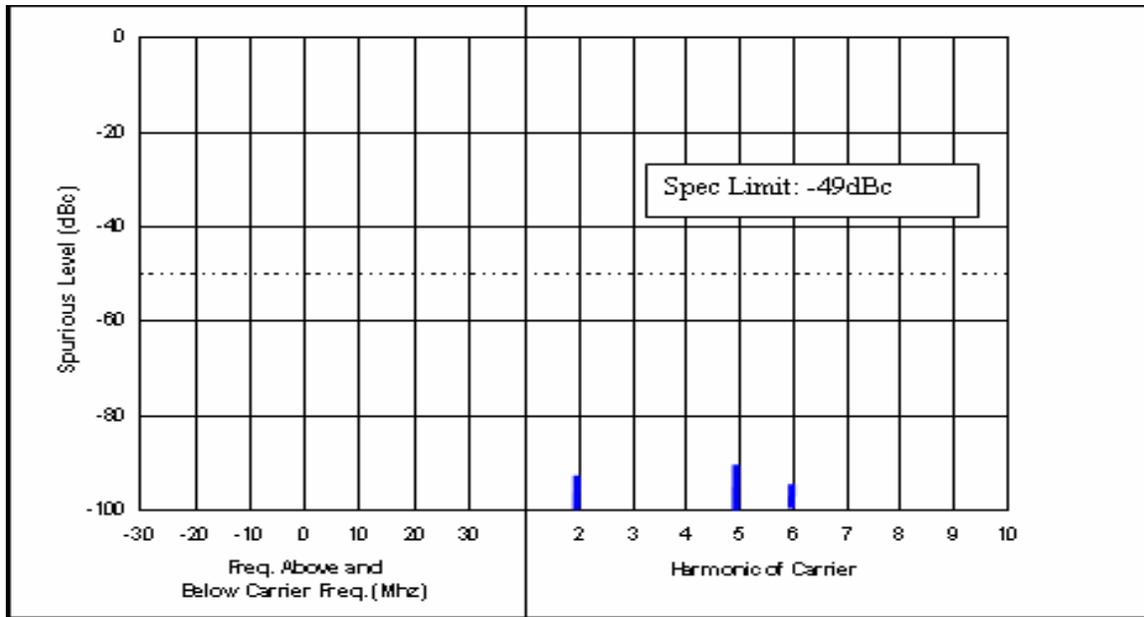


Table 6I-3: Hi-Power Harmonic of Carrier 526.525 MHz, 25 kHz Channel Spacing

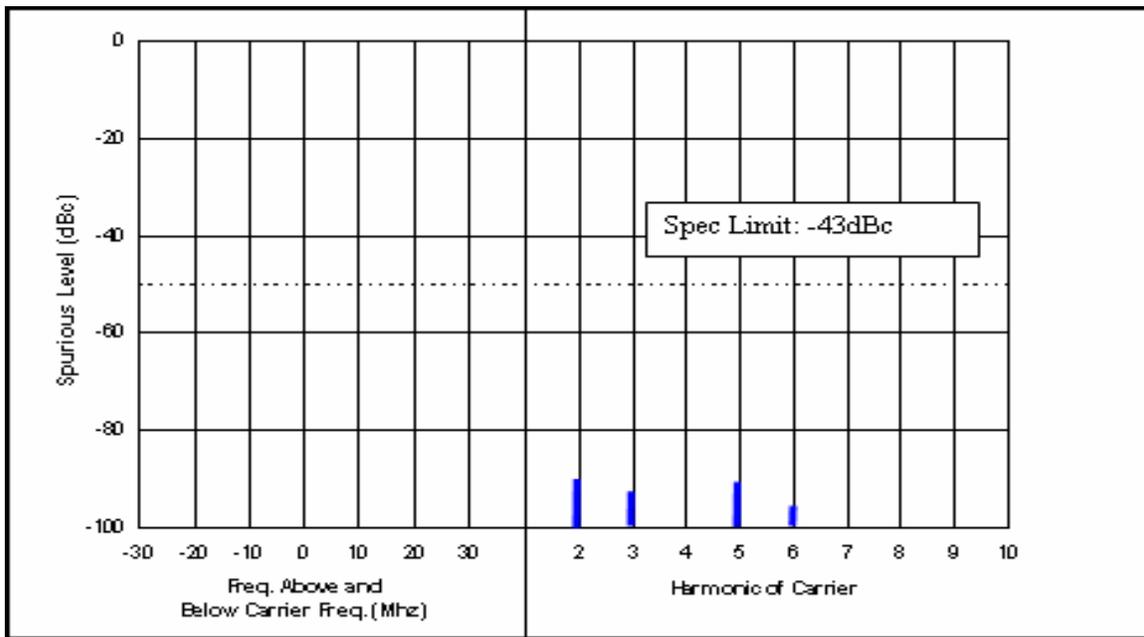


Table 6I-4: Lo-Power Harmonic of Carrier 450.525 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

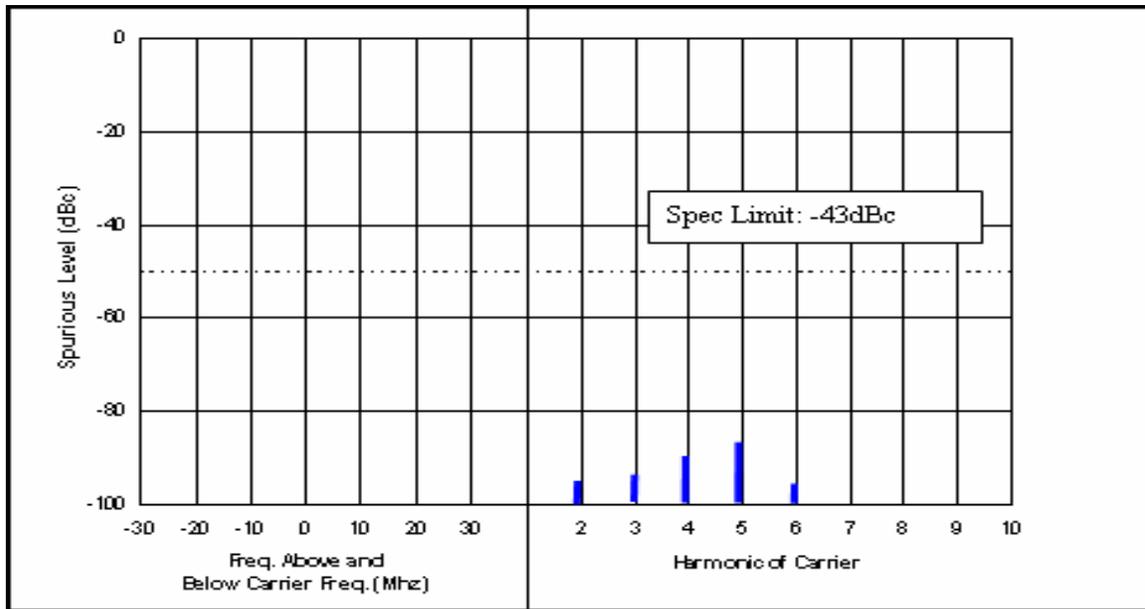


Table 6I-5: Lo-Power Harmonic of Carrier 488.525 MHz, 25 kHz Channel Spacing

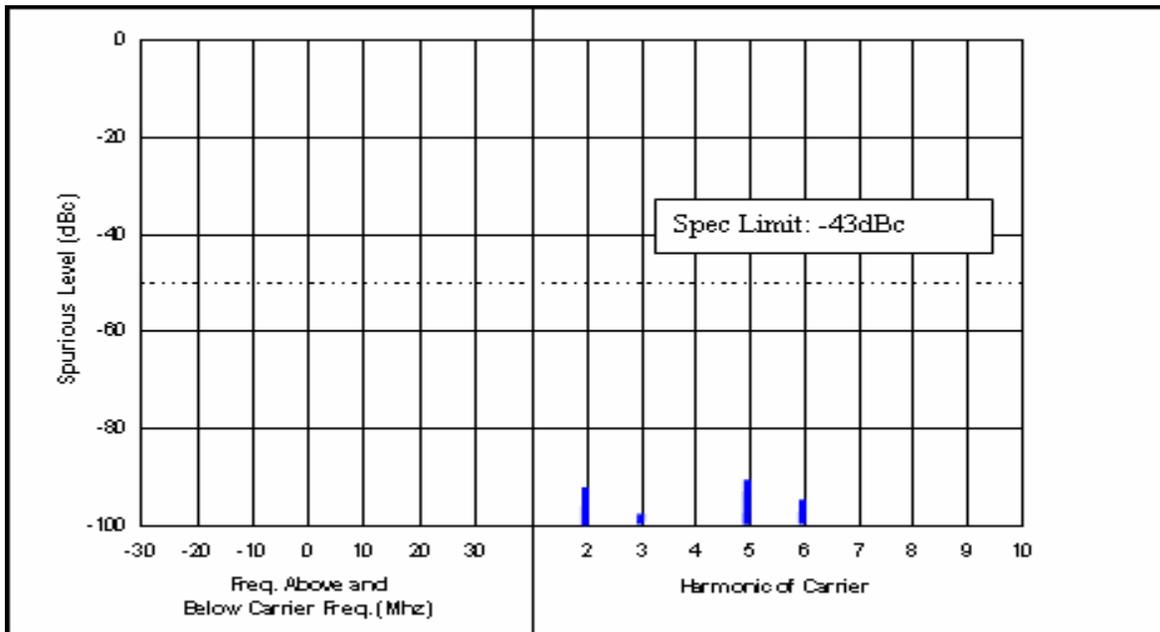


Table 6I-6: Lo-Power Harmonic of Carrier 526.525 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

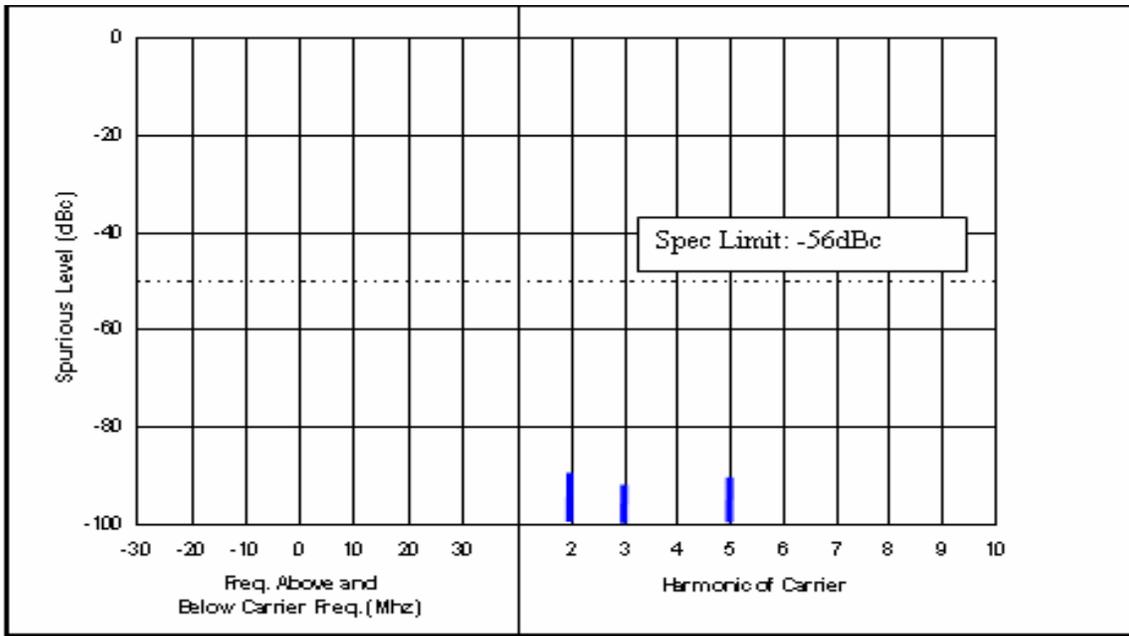


Table 6I-7: Hi-Power Harmonic of Carrier 450.525 MHz, 12.5 kHz Channel Spacing

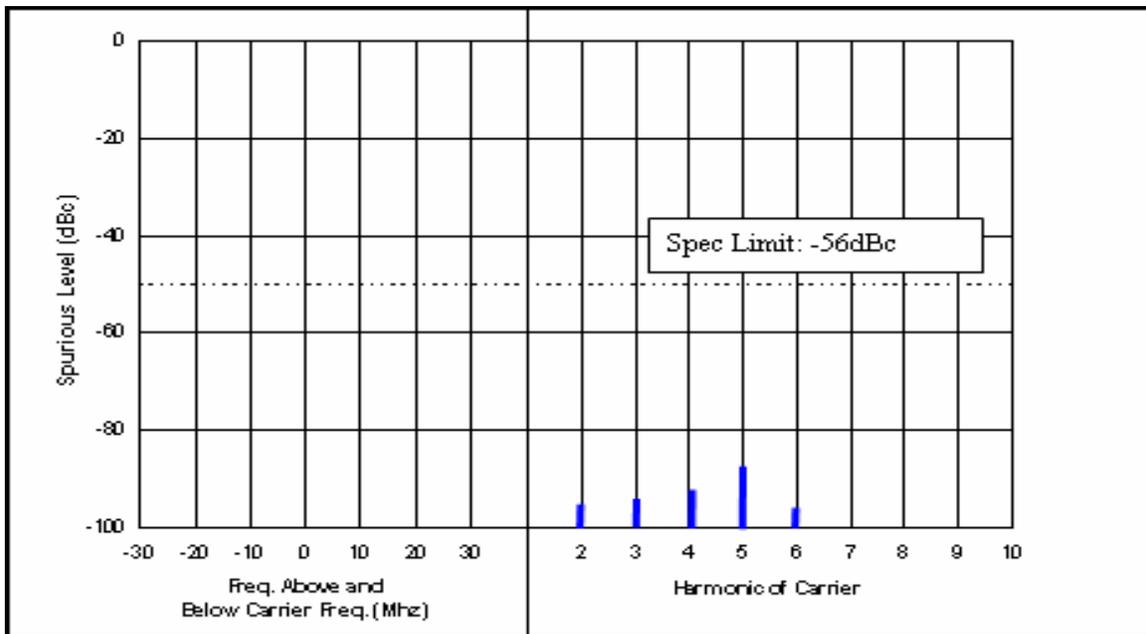


Table 6I-8: Hi-Power Harmonic of Carrier 488.525 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

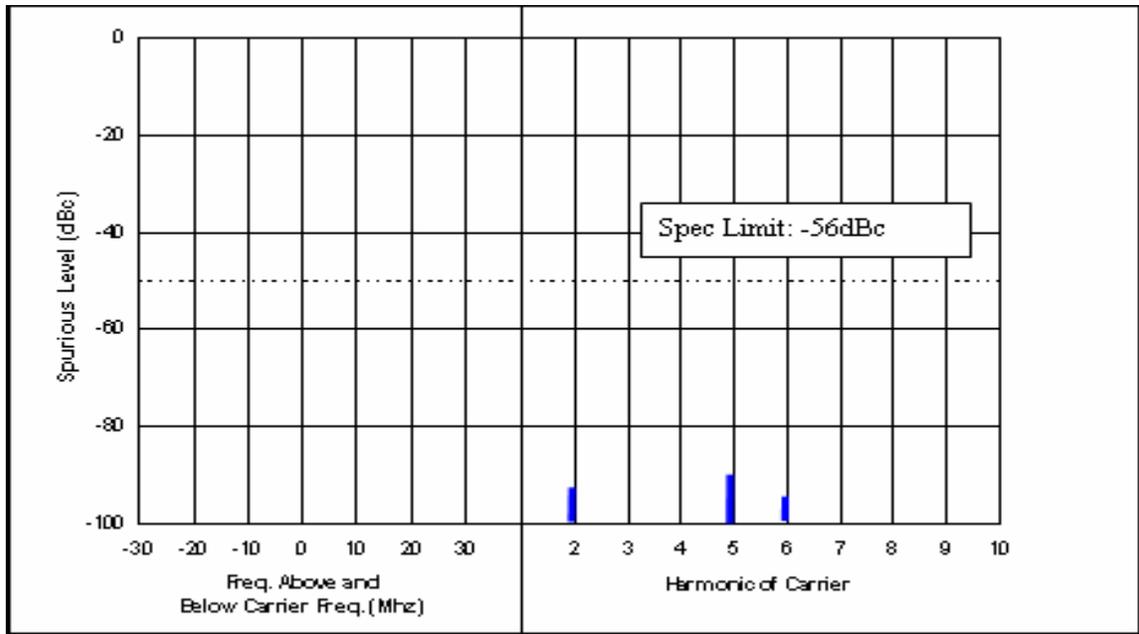


Table 6I-9: Hi-Power Harmonic of Carrier 526.525 MHz, 12.5 kHz Channel Spacing

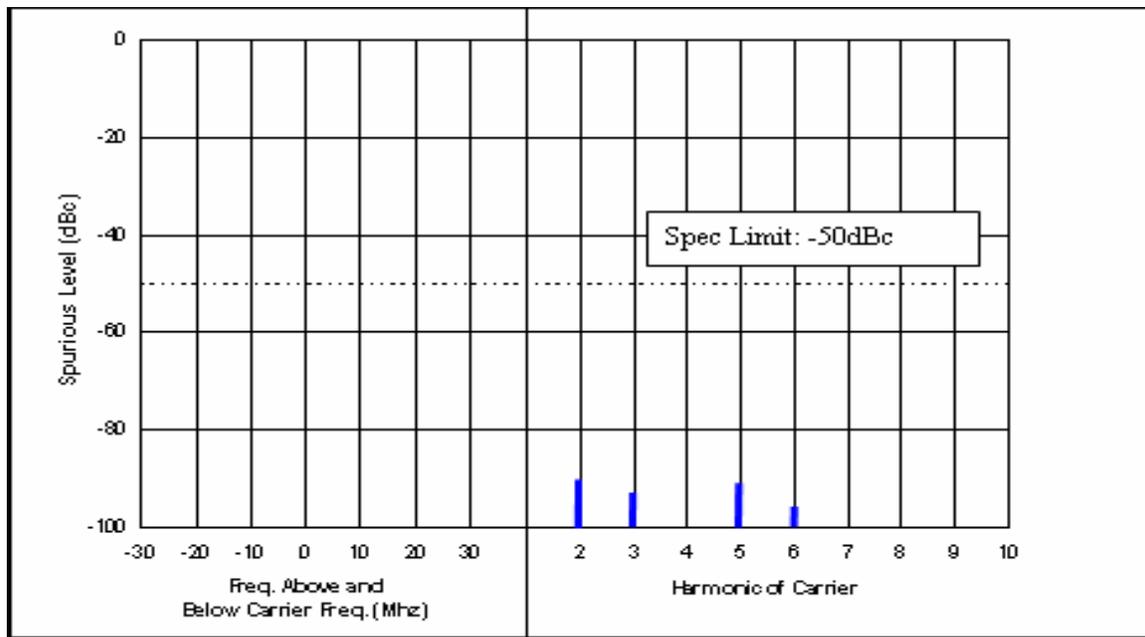


Table 6I-10: Lo-Power Harmonic of Carrier 450.525 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

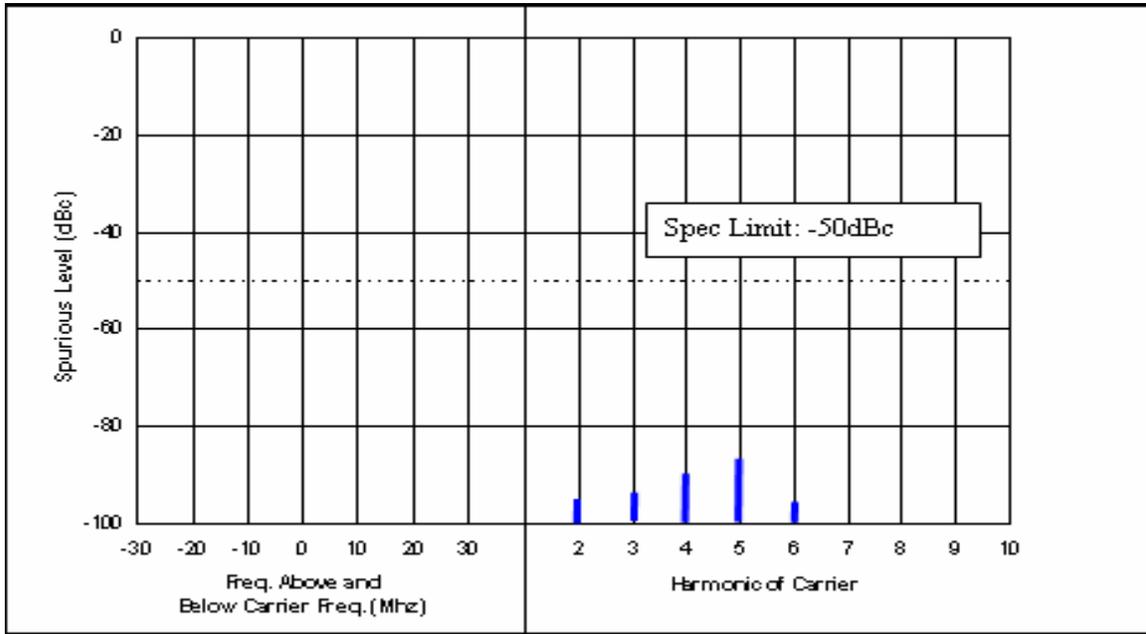


Table 6I-11: Lo-Power Harmonic of Carrier 488.525 MHz, 12.5 kHz Channel Spacing

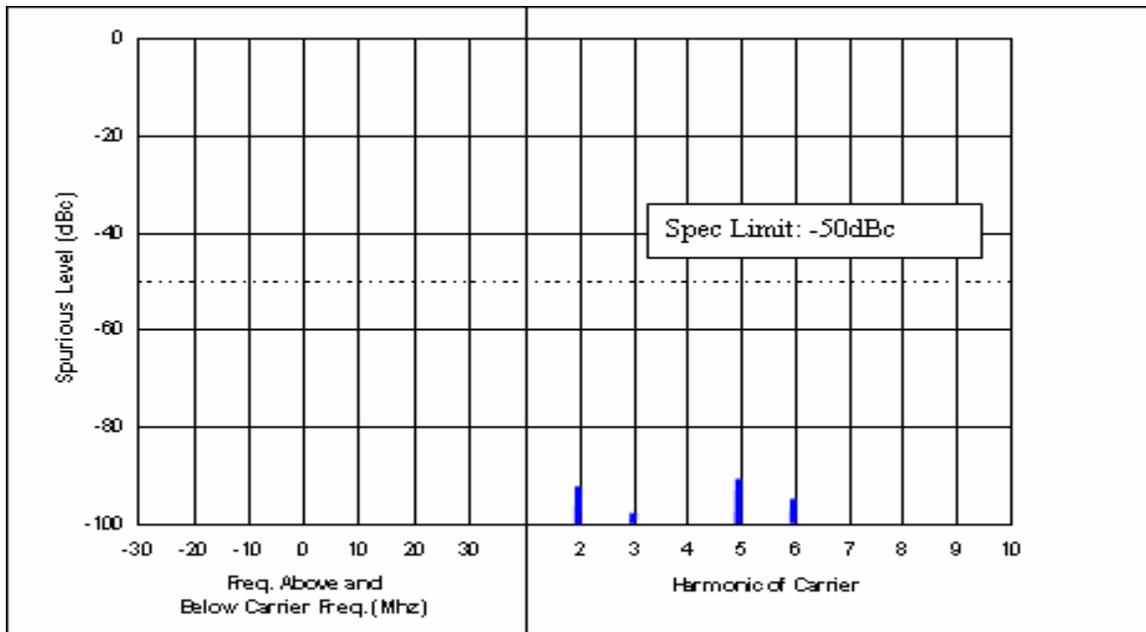


Table 6I-12: Lo-Power Harmonic of Carrier 526.525 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

Exhibit 6G (Revised)

Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 4 Watts

450.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
901.0500	-13	-50.31	-39.91
1351.5750	-13	-42.78	-36.35
1802.1000	-13	-42.49	-49.90
2252.6250	-13	-50.91	-48.42
2703.1500	-13	-44.70	-46.25
3153.6750	-13	-42.03	-52.44
3604.2000	-13	-58.10	-57.44
4054.7250	-13	-57.66	-52.93
4505.2500	-13	-59.82	-54.64

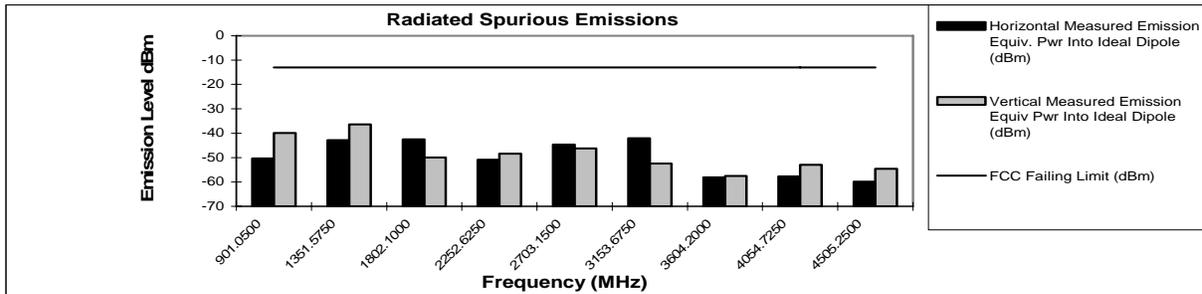


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 4 Watts

488.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
977.0500	-13	-61.40	-52.81
1465.5750	-13	-53.22	-33.33
1954.1000	-13	-39.47	*
2442.6250	-13	-50.48	-50.67
2931.1500	-13	-47.02	-53.55
3419.6750	-13	-54.27	-55.76
3908.2000	-13	-57.05	-55.82
4396.7250	-13	-57.49	-54.08
4885.2500	-13	-57.23	-52.55

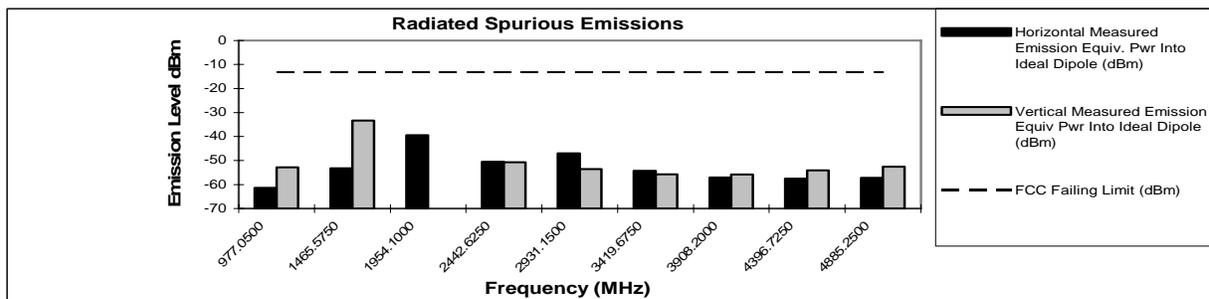

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007


Figure 6G-1: Hi-Power, 450.525 MHz, 25 kHz Channel Spacing & Hi-Power, 488.525 MHz, 25 kHz Channel Spacing

Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C
Tx Power: 4 Watts

526.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1053.0500	-13	-54.58	-59.23
1579.5750	-13	-39.55	-31.44
2106.1000	-13	-43.59	-42.40
2632.6250	-13	-41.74	-46.46
3159.1500	-13	-40.25	-47.31
3685.6750	-13	-58.87	-58.02
4212.2000	-13	-60.98	-57.20
4738.7250	-13	-58.25	-52.10
5265.2500	-13	*	*

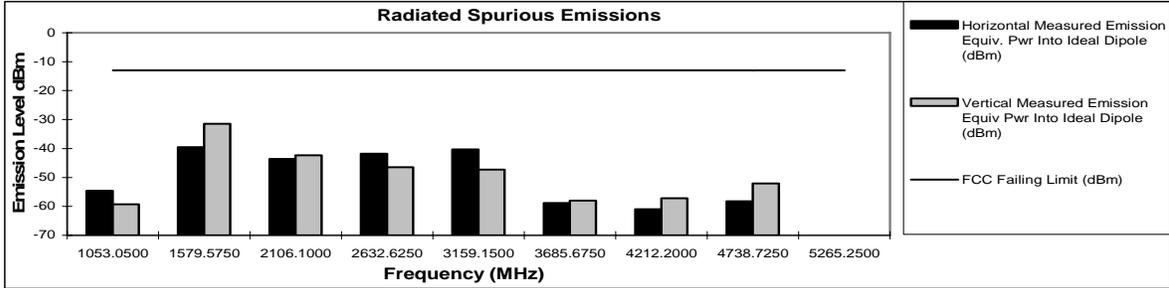

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007

Figure 6G-2: Hi-Power, 526.525 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 4 Watts

450.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
901.0500	-20	-53.32	-52.57
1351.5750	-20	-52.38	-50.26
1802.1000	-20	-42.49	-49.02
2252.6250	-20	-55.34	-58.20
2703.1500	-20	-45.19	-44.81
3153.6750	-20	-43.02	-47.71
3604.2000	-20	-59.44	-58.70
4054.7250	-20	-58.54	-55.20
4505.2500	-20	-59.47	-53.85

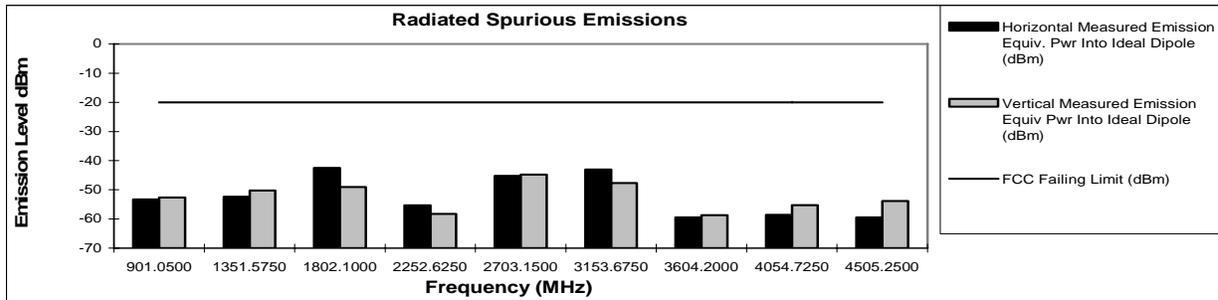


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 4 Watts

488.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
977.0500	-20	-55.44	-53.71
1465.5750	-20	-50.45	-36.40
1954.1000	-20	-39.49	*
2442.6250	-20	-47.89	-51.93
2931.1500	-20	-45.68	-51.11
3419.6750	-20	-52.31	-56.88
3908.2000	-20	-57.54	-57.46
4396.7250	-20	-57.52	-53.75
4885.2500	-20	-57.32	-51.41

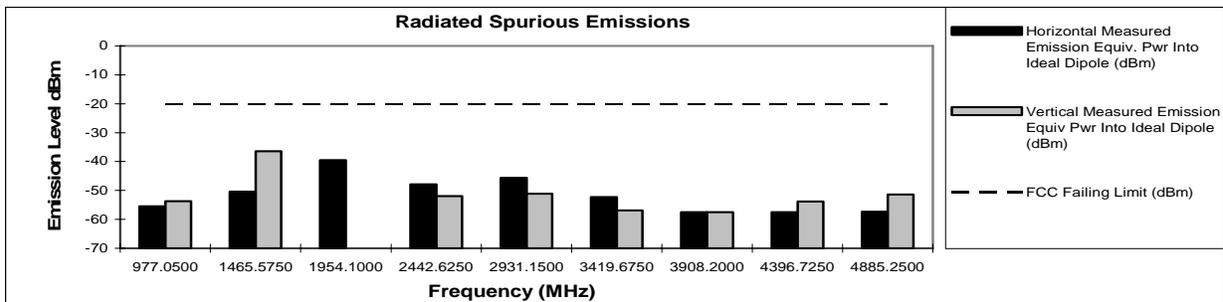

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007


Figure 6G-3: Lo-Power, 450.525 MHz, 25 kHz Channel Spacing & Lo-Power, 488.525 MHz, 25 kHz Channel Spacing

Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C
Tx Power: 4 Watts

526.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1053.0500	-20	-51.67	-53.67
1579.5750	-20	-40.75	-36.85
2106.1000	-20	-43.26	-41.68
2632.6250	-20	-44.33	-45.74
3159.1500	-20	-40.32	-46.71
3685.6750	-20	-56.99	-56.22
4212.2000	-20	-59.51	-56.90
4738.7250	-20	-57.41	-52.50
5265.2500	-20	*	*

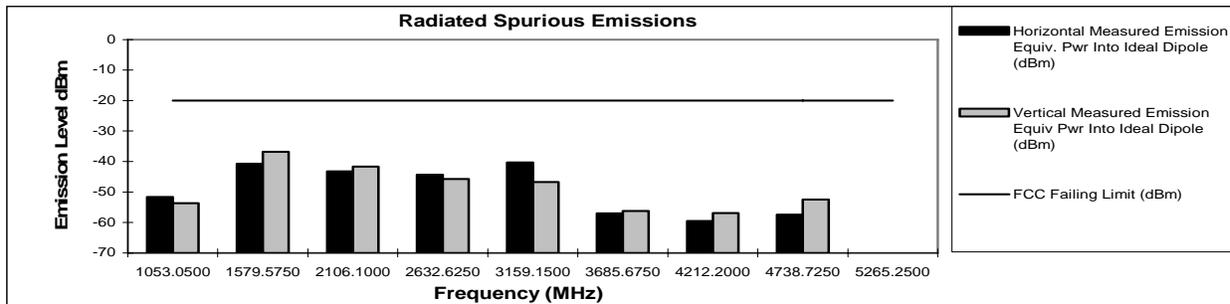

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007

Figure 6G-4: Lo-Power, 526.525 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 1 Watts

450.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
901.0500	-20	-59.16	-57.69
1351.5750	-20	-57.90	-44.55
1802.1000	-20	-49.29	-55.12
2252.6250	-20	-56.97	-57.90
2703.1500	-20	-54.52	-53.10
3153.6750	-20	-59.40	*
3604.2000	-20	*	*
4054.7250	-20	-60.92	*
4505.2500	-20	*	*

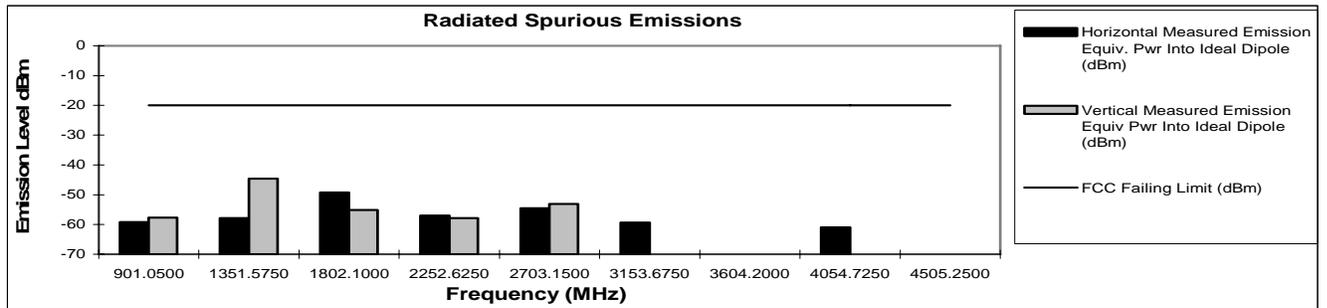


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 1 Watts

488.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
977.0500	-20	-63.33	-68.25
1465.5750	-20	-54.78	-38.26
1954.1000	-20	*	*
2442.6250	-20	-50.27	*
2931.1500	-20	-59.12	-59.94
3419.6750	-20	-60.62	-59.39
3908.2000	-20	-61.19	*
4396.7250	-20	*	*
4885.2500	-20	*	*

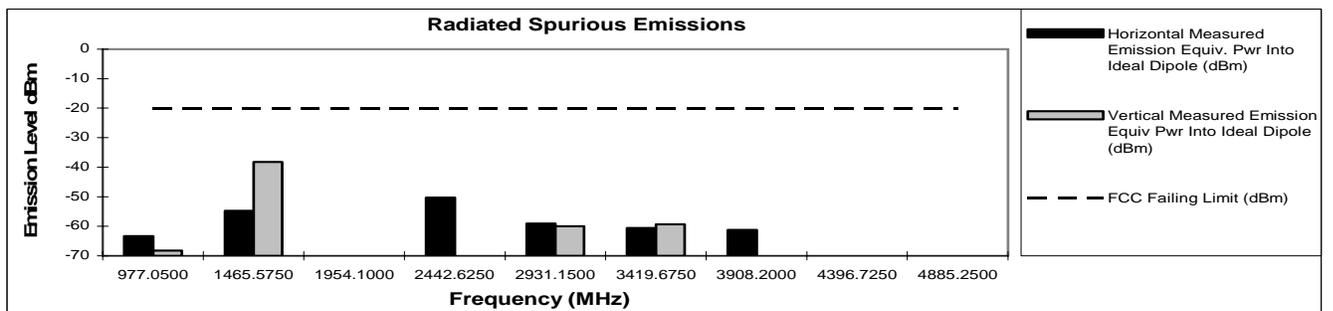

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007


Figure 6G-5: Hi-Power, 450.525 MHz, 12.5 kHz Channel Spacing & Hi-Power, 488.525 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C
Tx Power: 1 Watts

526.525 MHz

Channel Spacing 12.5kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1053.0500	-20	-59.98	-60.29
1579.5750	-20	-50.25	-44.81
2106.1000	-20	-49.82	-52.92
2632.6250	-20	-49.08	-50.53
3159.1500	-20	-62.39	*
3685.6750	-20	-63.96	*
4212.2000	-20	-63.35	*
4738.7250	-20	*	*
5265.2500	-20	*	*

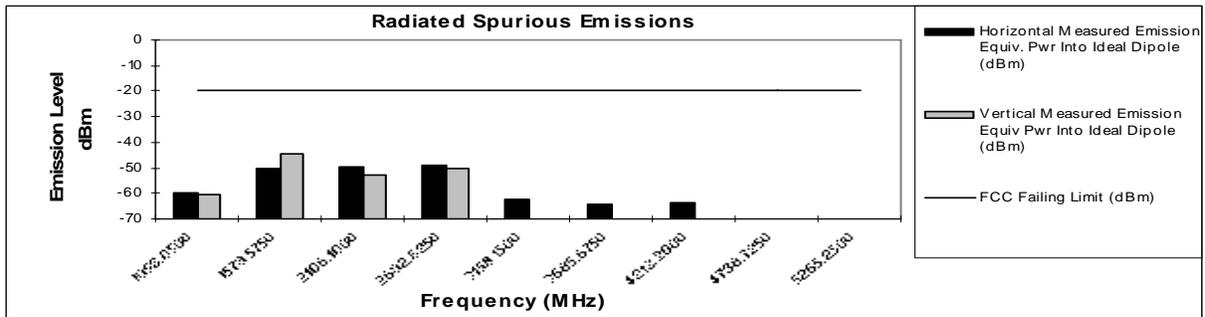

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007

Figure 6G-6: Lo-Power, 526.525 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 1 Watts

450.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
901.0500	-13	-58.24	-58.62
1351.5750	-13	-58.39	-48.46
1802.1000	-13	-50.28	-55.55
2252.6250	-13	-58.05	-56.97
2703.1500	-13	-50.46	-54.80
3153.6750	-13	-60.36	*
3604.2000	-13	-63.50	*
4054.7250	-13	*	*
4505.2500	-13	*	*

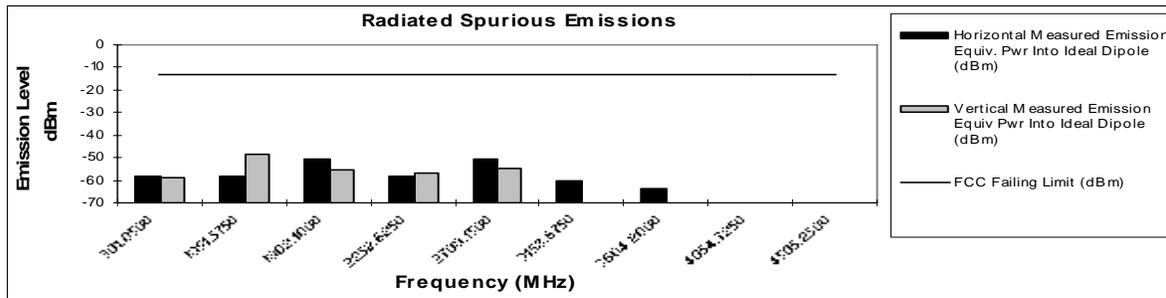


Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C

Tx Power: 1 Watts

488.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
977.0500	-13	-62.92	-64.73
1465.5750	-13	-55.44	-43.06
1954.1000	-13	*	*
2442.6250	-13	-50.49	-52.03
2931.1500	-13	-59.02	-61.31
3419.6750	-13	-61.90	-59.34
3908.2000	-13	-62.46	-57.63
4396.7250	-13	*	*
4885.2500	-13	*	*

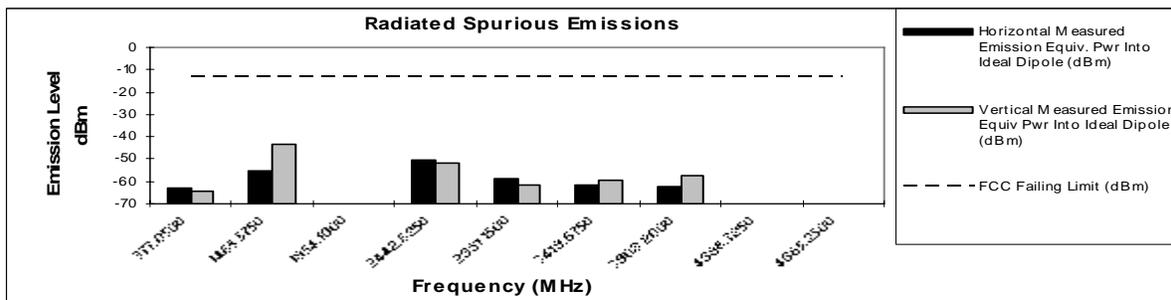

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007


Figure 6G-7: Lo-Power, 450.525 MHz, 12.5 kHz Channel Spacing & Lo-Power, 485.525 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: EPP LAZARUS - PMUE1482C
Tx Power: 1 Watts

526.525 MHz

Channel Spacing 25kHz | S/N W5JGE13S

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
1053.0500	-13	-59.40	-59.24
1579.5750	-13	-50.02	-45.50
2106.1000	-13	-50.05	-49.77
2632.6250	-13	-48.16	-50.52
3159.1500	-13	-62.89	*
3685.6750	-13	*	*
4212.2000	-13	*	*
4738.7250	-13	*	*
5265.2500	-13	*	*

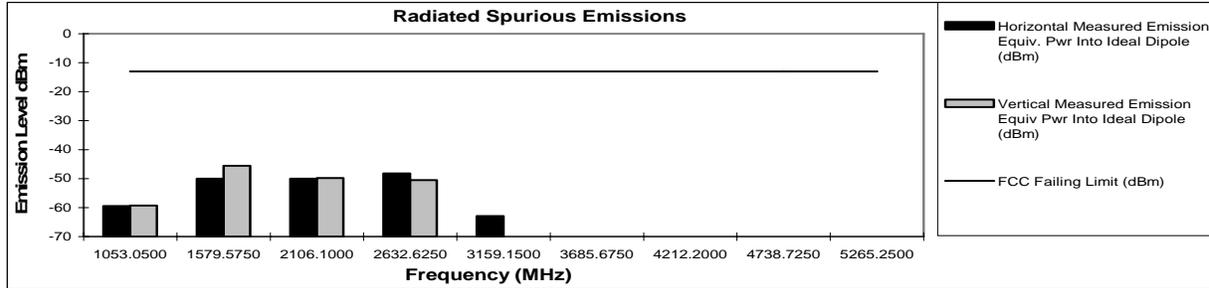

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679A-1

March 2, 2007

Figure 6G-8: Lo-Power, 526.525 MHz, 12.5 kHz Channel Spacing