

SUBMITTED MEASURED DATA AND METHOD OF MEASUREMENT

	MEASUREMENT	EXHIBIT	NUMBER OF PAGES
I	RF Power Output	7A	1
II	Audio Response	7B	2
III	Low Pass Filter Response	7C	2
IV	Modulation Limiting	7D	6
V	Occupied Bandwidth	7E	12
VI	Conducted Spurious Emissions	7F	12
VII	Radiated Spurious Emissions	7G	2
VIII	Frequency Stability		
	A. Temperature	7H	1
	B. Supply Voltage	7I	1
IX	Transient Frequency Behavior	7J	4

RF Power Output - Measured Data

The supply voltage to the transmitter was set to 7.5 volts DC. The RF output power was measured with the indicated voltage and current applied into the final RF amplifying device.

HIGH - POWER SETTING, FREQUENCY 403.050 MHz.

Measured RF Output Power : 4.55 WATTS
Measured DC Voltage : 7.261 VOLTS
Measured DC Current : 1.43 AMP
Measured DC Input Power : 10.38 WATTS

HIGH - POWER SETTING, FREQUENCY 436.050 MHz.

Measured RF Output Power : 4.53 WATTS
Measured DC Voltage : 7.302 VOLTS
Measured DC Current : 1.16 AMP
Measured DC Input Power : 8.47 WATTS

HIGH - POWER SETTING, FREQUENCY 469.950 MHz.

Measured RF Output Power : 4.36 WATTS
Measured DC Voltage : 7.28 VOLTS
Measured DC Current : 1.3 AMP
Measured DC Input Power : 9.46 WATTS

LOW - POWER SETTING, FREQUENCY 403.050 MHz.

Measured RF Output Power : 1.24 WATTS
Measured DC Voltage : 7.358 VOLTS
Measured DC Current : 0.84 AMP
Measured DC Input Power : 6.18 WATTS

LOW - POWER SETTING, FREQUENCY 436.050 MHz.

Measured RF Output Power : 1.31 WATTS
Measured DC Voltage : 7.367 VOLTS
Measured DC Current : 0.78 AMP
Measured DC Input Power : 5.75 WATTS

LOW- POWER SETTING, FREQUENCY 469.950 MHz.

Measured RF Output Power: 1.30 WATTS
Measured DC Voltage: 7.353 VOLTS
Measured DC Current: 0.87 AMP
Measured DC Input Power: 6.40 WATTS

MOTOROLA INC.

**TRANSMITTER AUDIO RESPONSE CHARACTERISTIC
MODULATION LEVEL vs. AUDIO FREQUENCY**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency: 436.050Mhz
Channel Spacing: 25KHz

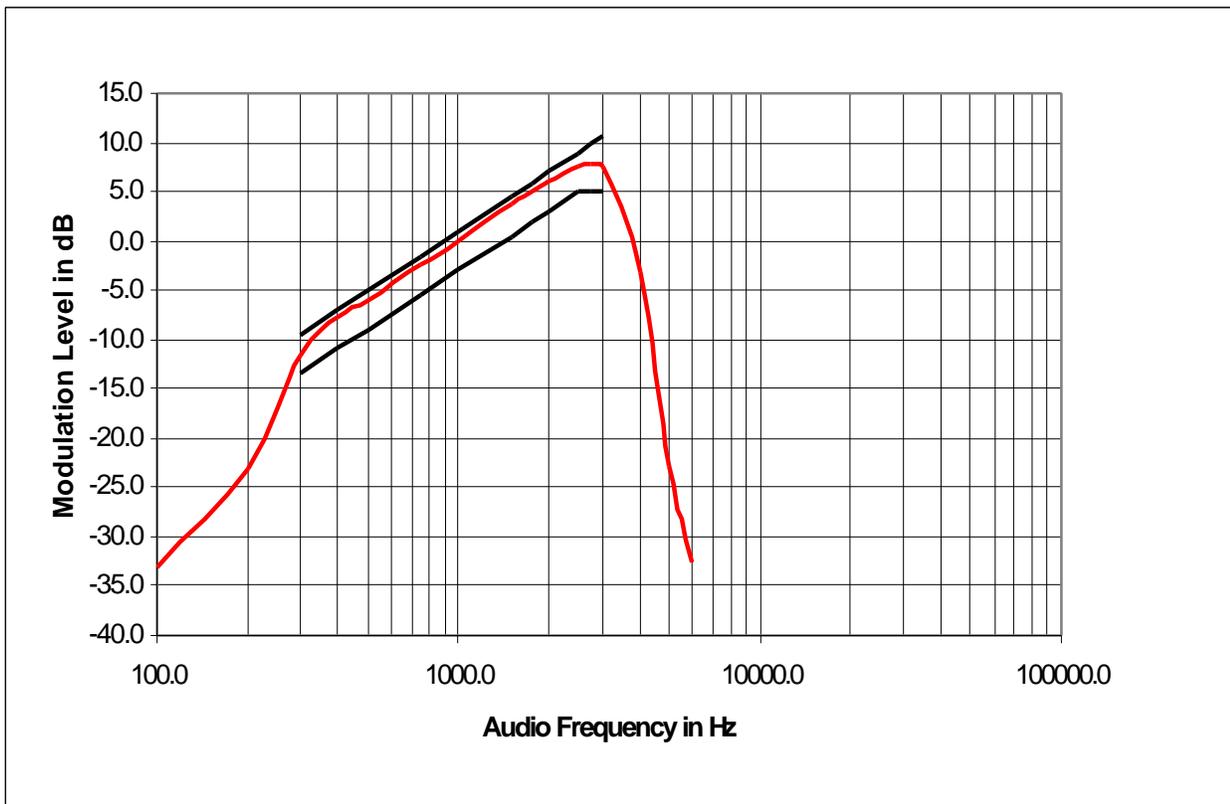

MOTOROLA INC.

**TRANSMITTER AUDIO RESPONSE CHARACTERISTIC
MODULATION LEVEL vs. AUDIO FREQUENCY**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency: 436.050Mhz
Channel Spacing: 12.5KHz

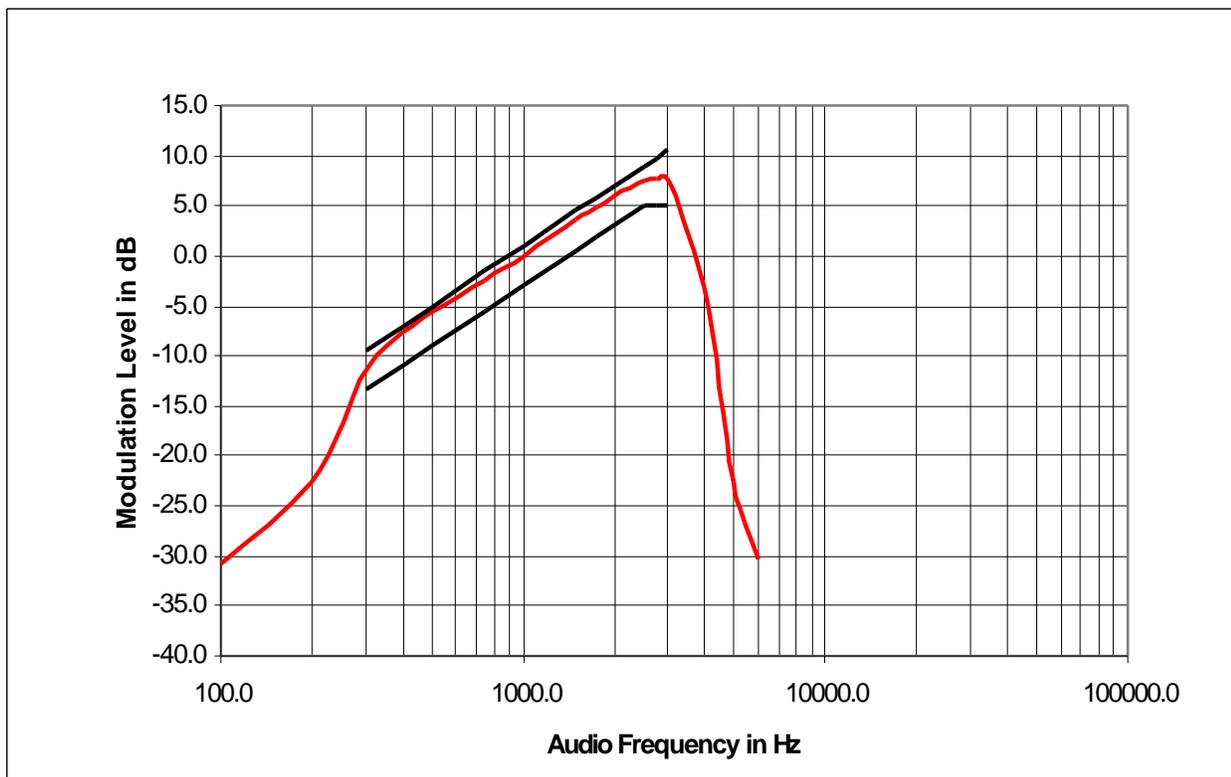


MOTOROLA INC.
TRANSMITTER
POST - LIMITER ROLL OFF RESPONSE
FILTER OUTPUT vs. AUDIO FREQUENCY

Xmtr Type : AZ489FT4837
Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 25KHz

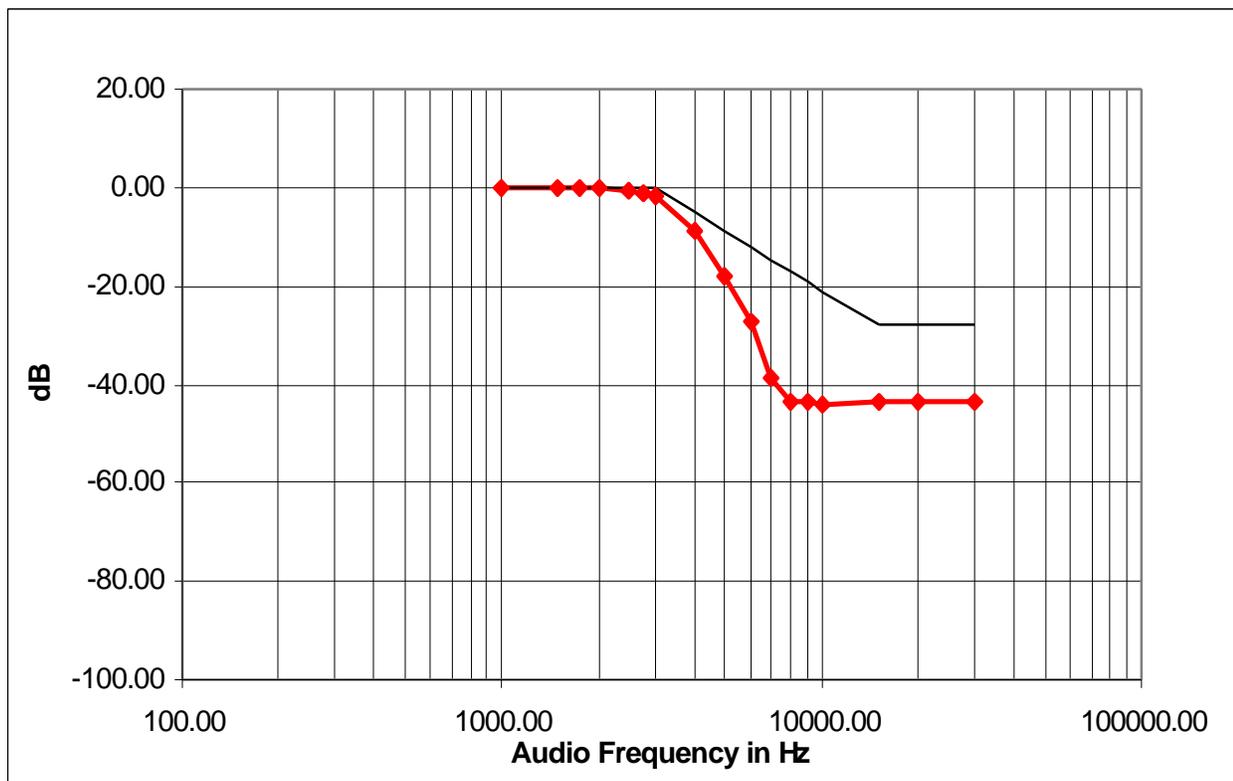

MOTOROLA INC.
TRANSMITTER
POST - LIMITER ROLL OFF RESPONSE
FILTER OUTPUT vs. AUDIO FREQUENCY


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 12.5KHz

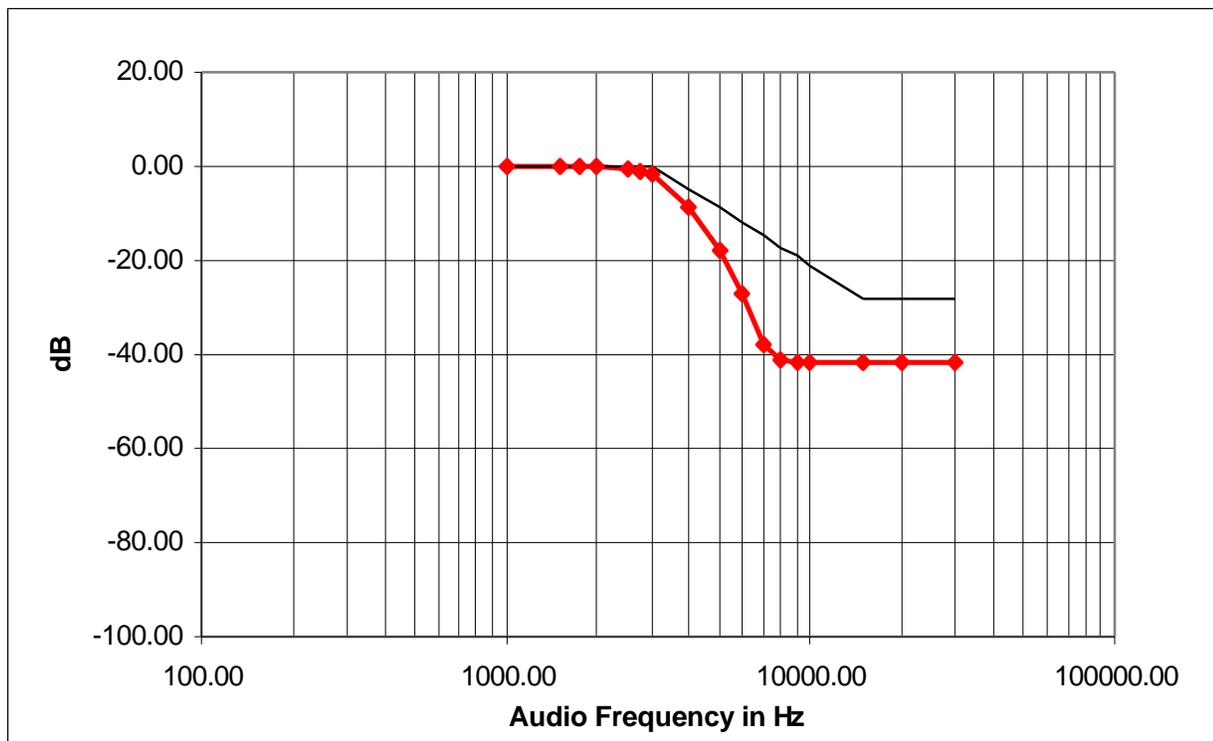

MOTOROLA INC.
CARRIER SQUELCH
AUDIO INPUT LEVEL vs. DEVIATION


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 25 KHz

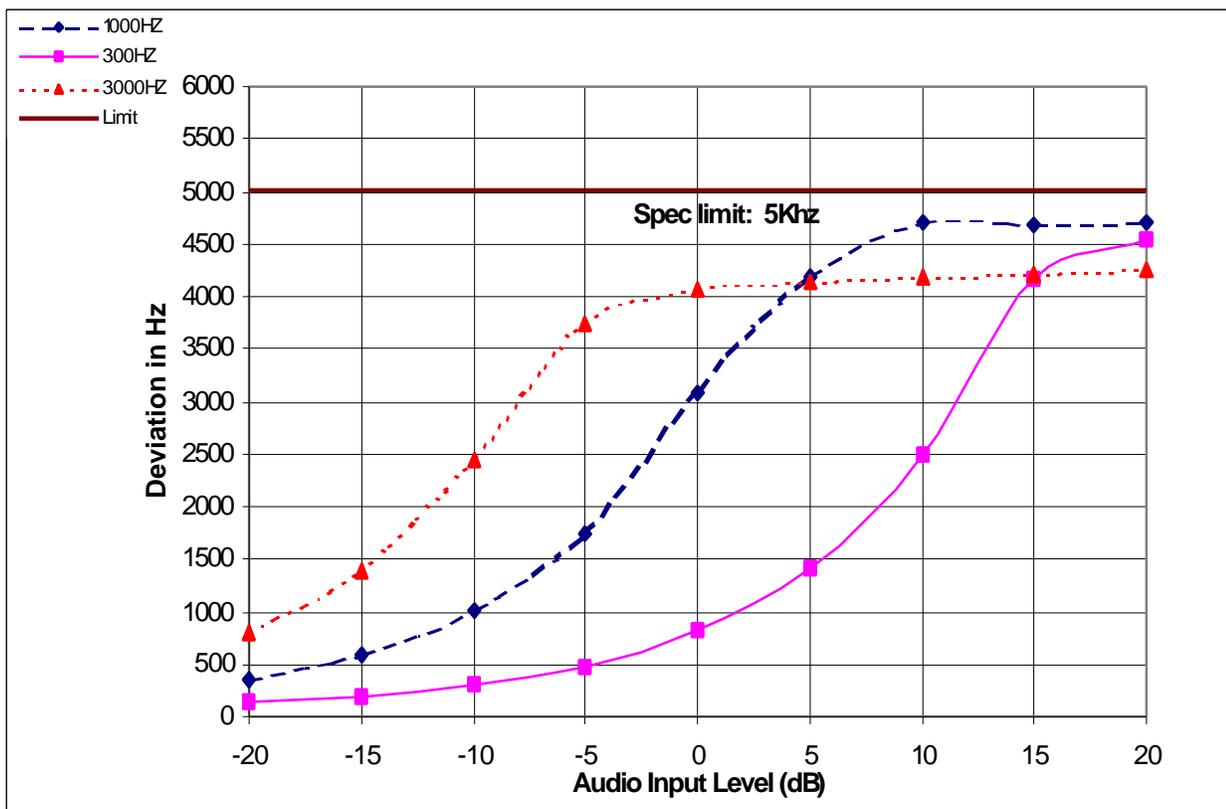

MOTOROLA INC.
TONE WITH "PL"
AUDIO INPUT LEVEL vs. DEVIATION

Xmtr Type : AZ489FT4837


Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz

Channel Spacing : 25KH

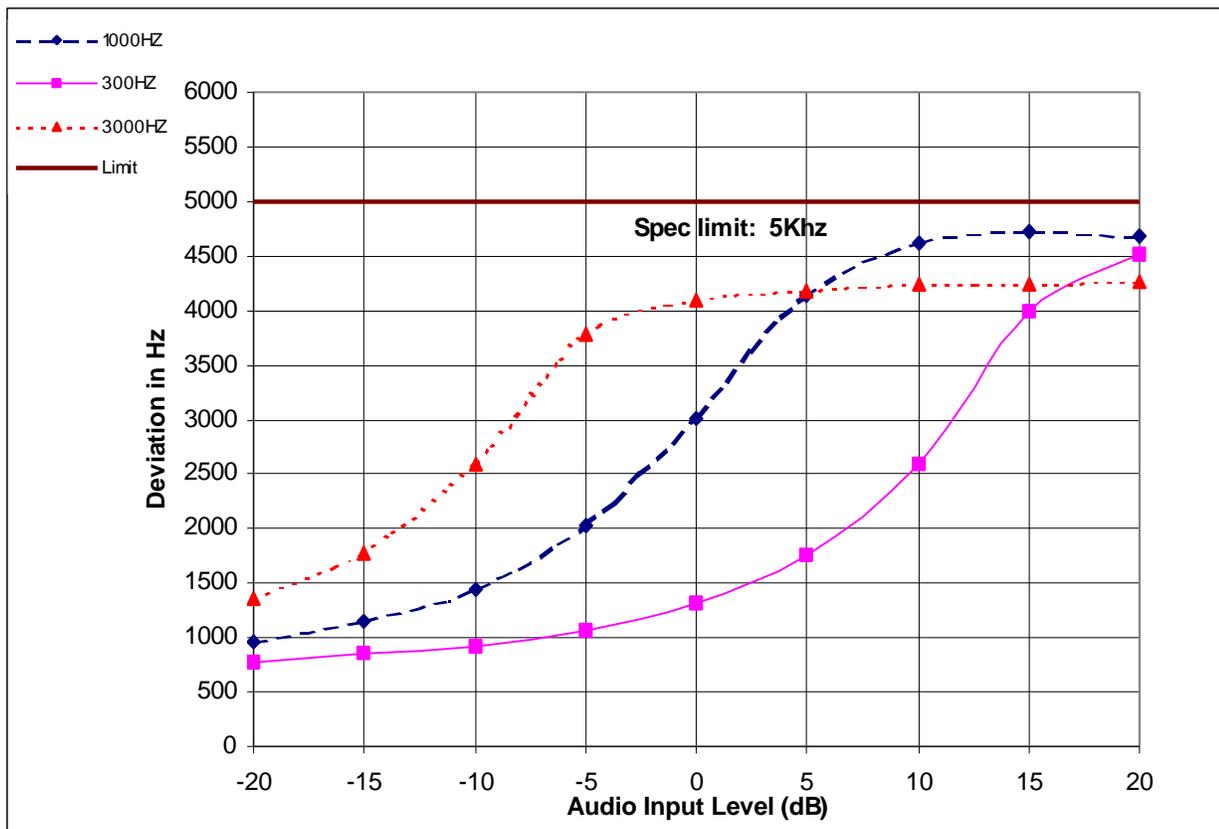

MOTOROLA INC.
tone WITH "DPL"
AUDIO INPUT LEVEL vs. DEVIATION


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 25KHz

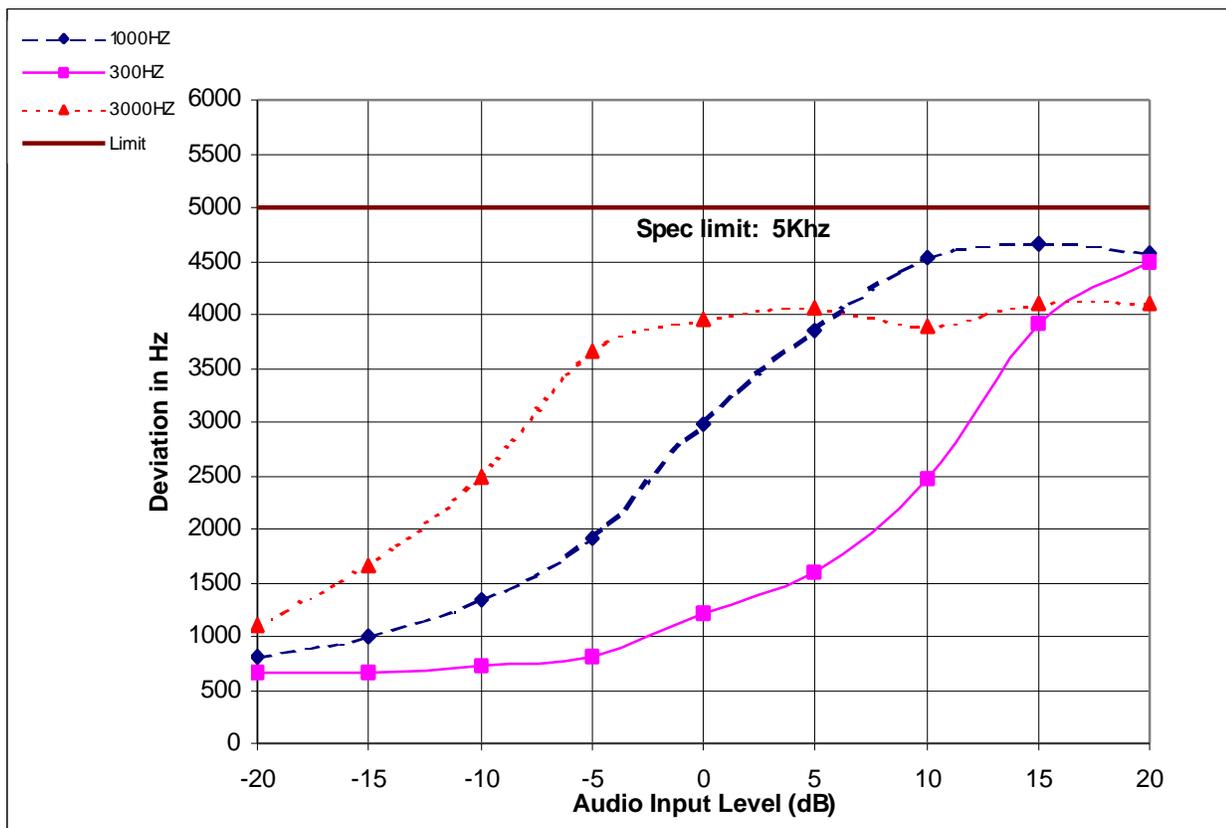

MOTOROLA INC.
CARRIER SQUELCH
AUDIO INPUT LEVEL vs. DEVIATION


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 13th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 12.5KHz

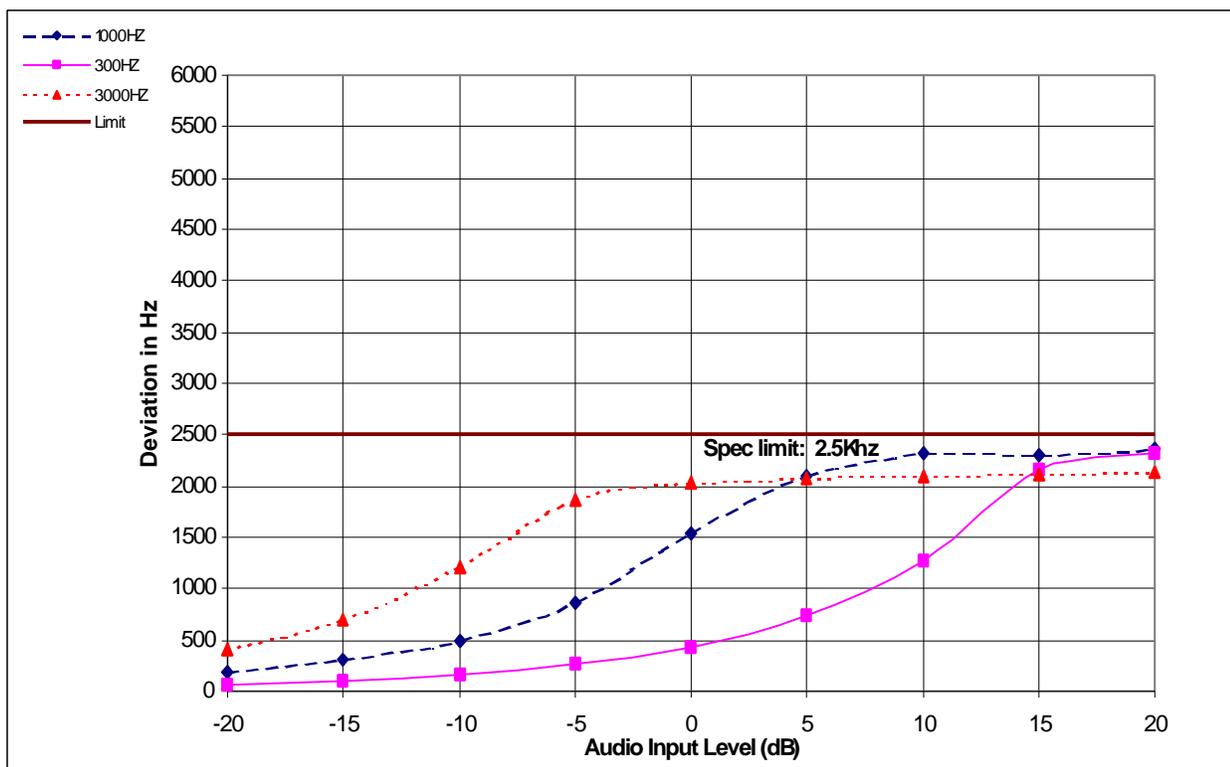

MOTOROLA INC.

**TONE WITH "PL"
AUDIO INPUT LEVEL vs. DEVIATION**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 12.5KHz

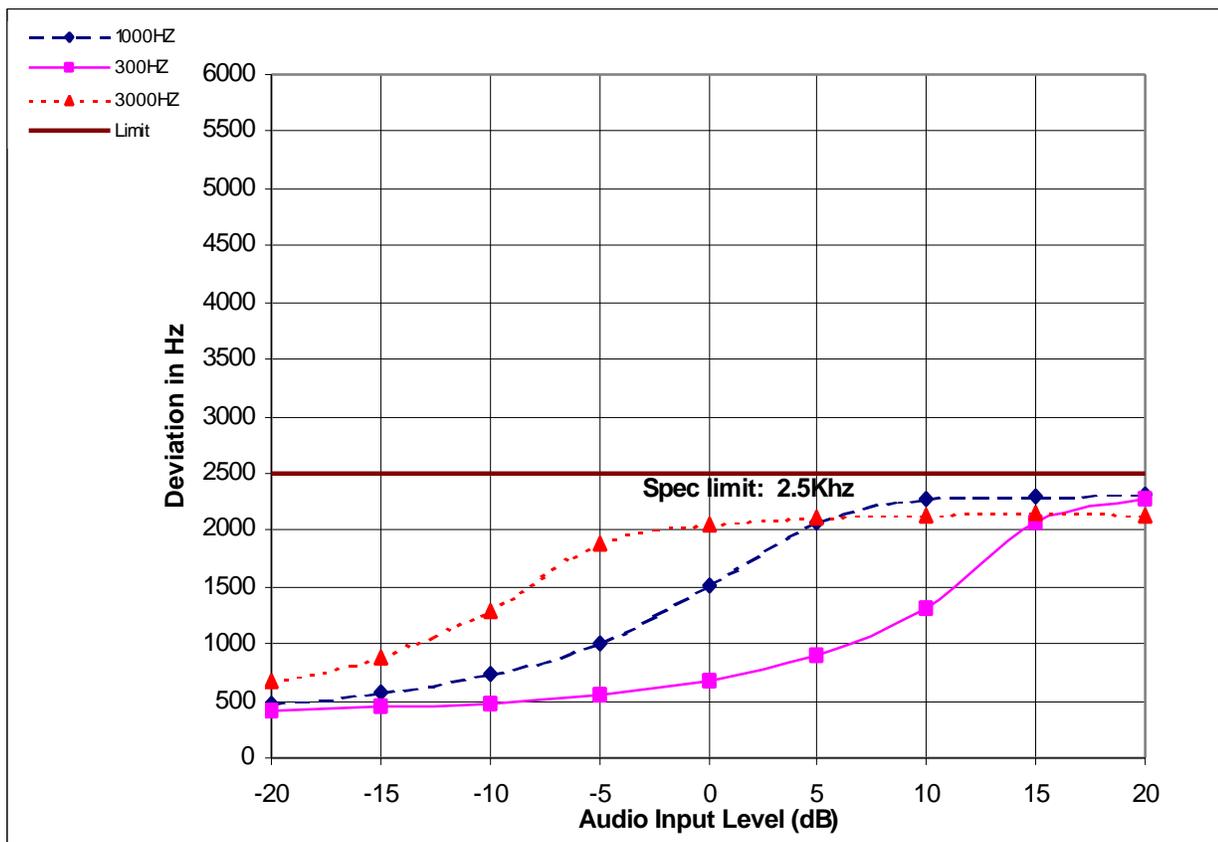

MOTOROLA INC.
TONE WITH "DPL"
AUDIO INPUT LEVEL vs. DEVIATION


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Frequency : 436.050Mhz
Channel Spacing : 12.5KHz

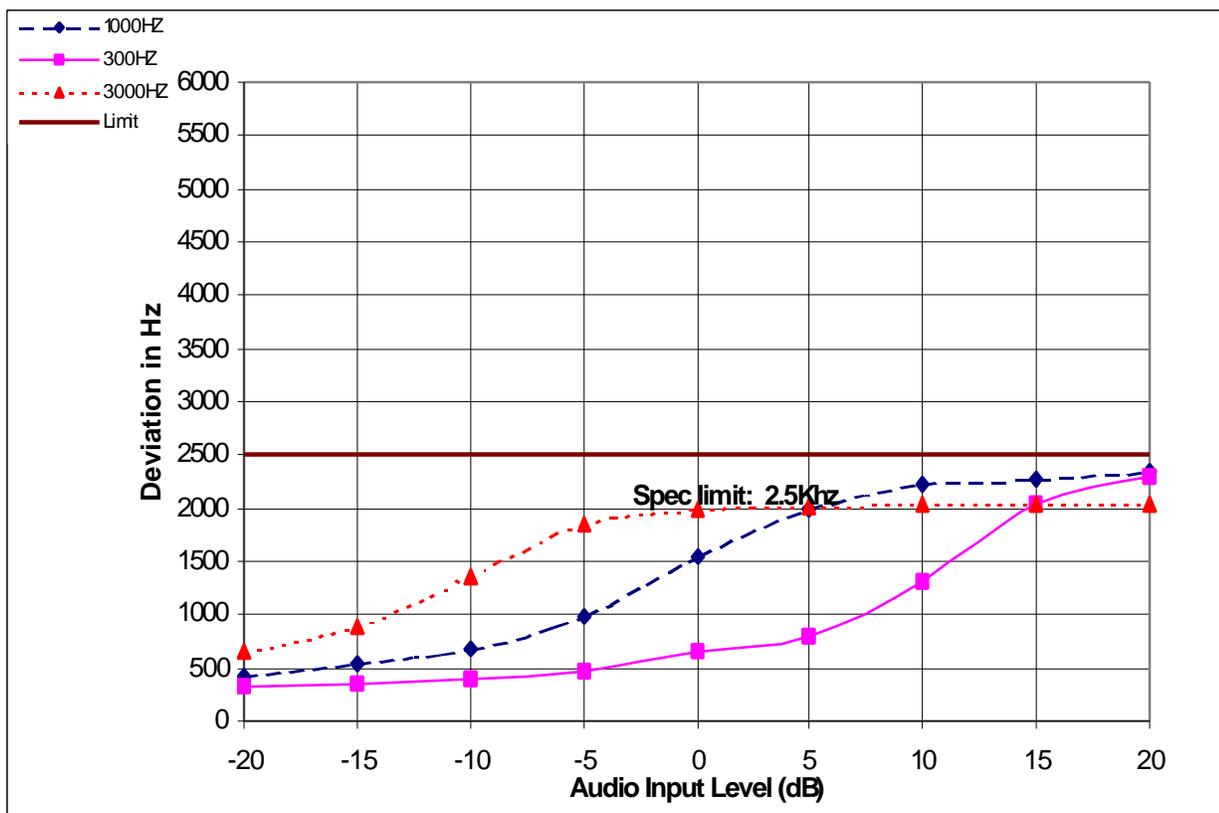

MOTOROLA INC.
OCCUPIED BANDWIDTH
(2500 HZ AUDIO MODULATION ONLY)

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

25Khz Channel Spacing

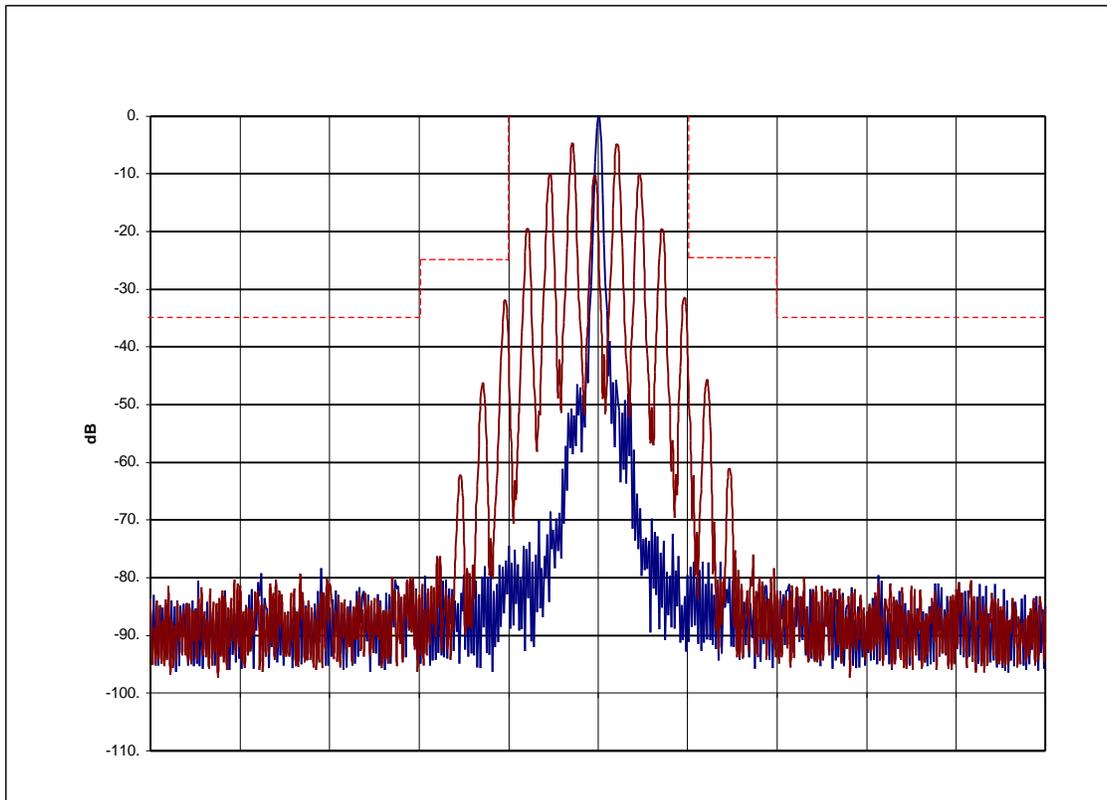

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(2500 HZ AUDIO & PL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi.

25Khz Channel Spacing

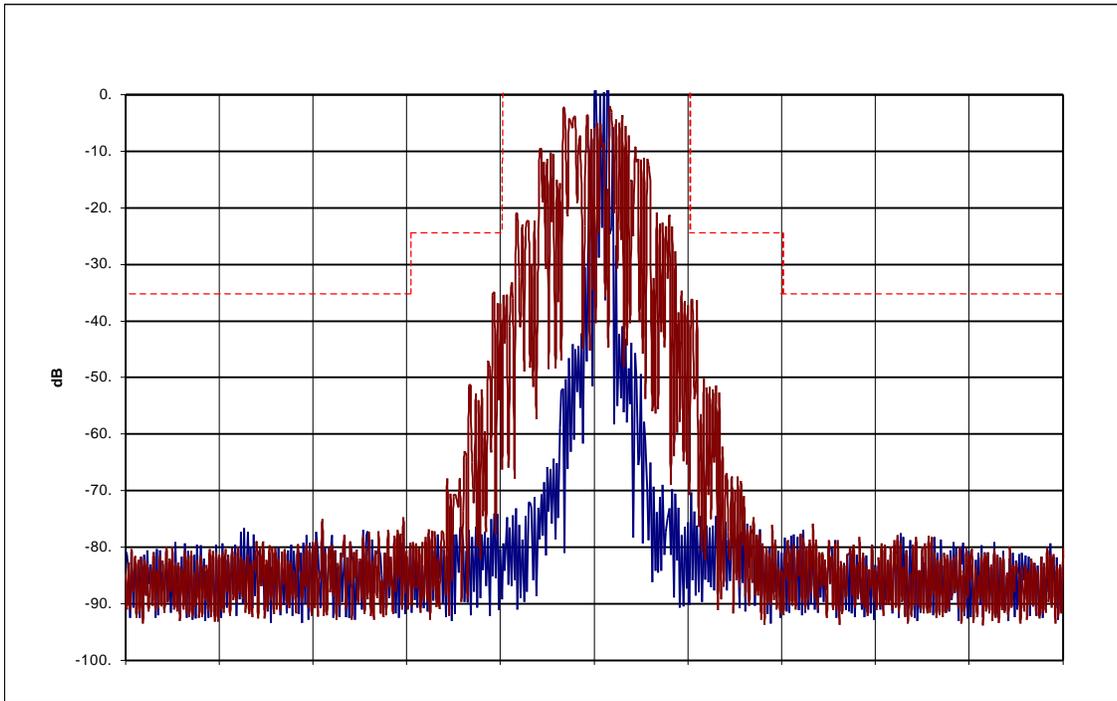

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(2500 HZ AUDIO & DPL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

25Khz Channel Spacing

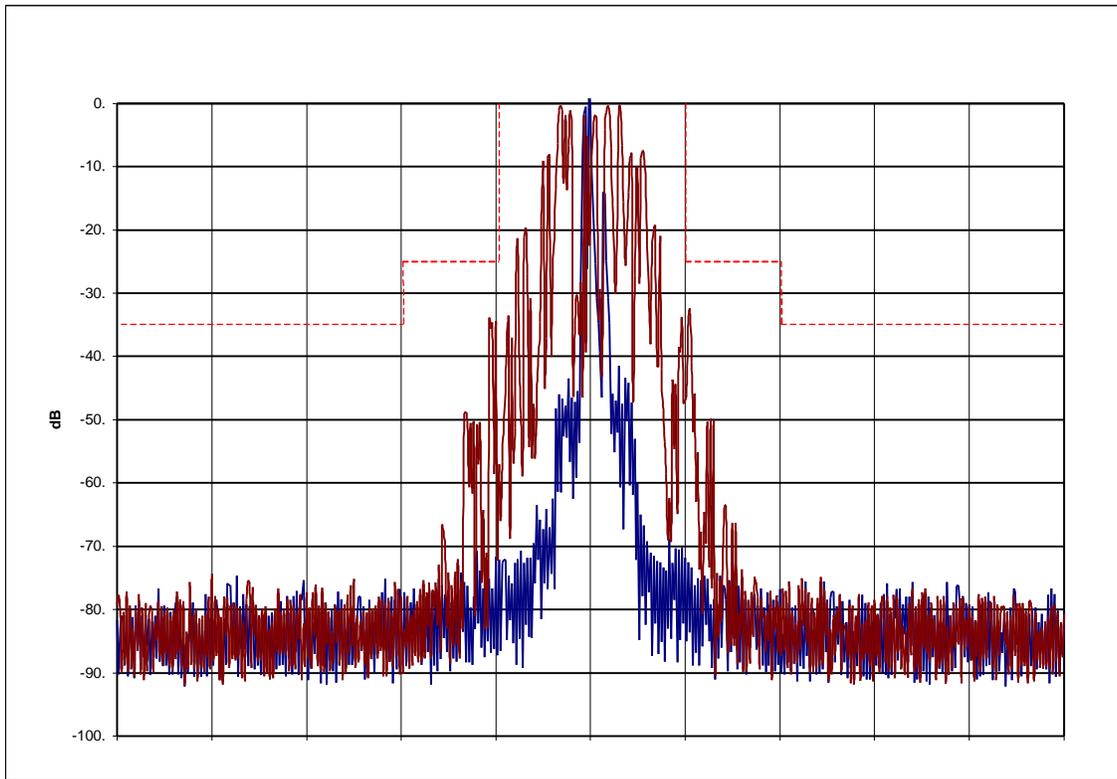

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(DTMF MODULATION ONLY)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

25Khz Channel Spacing

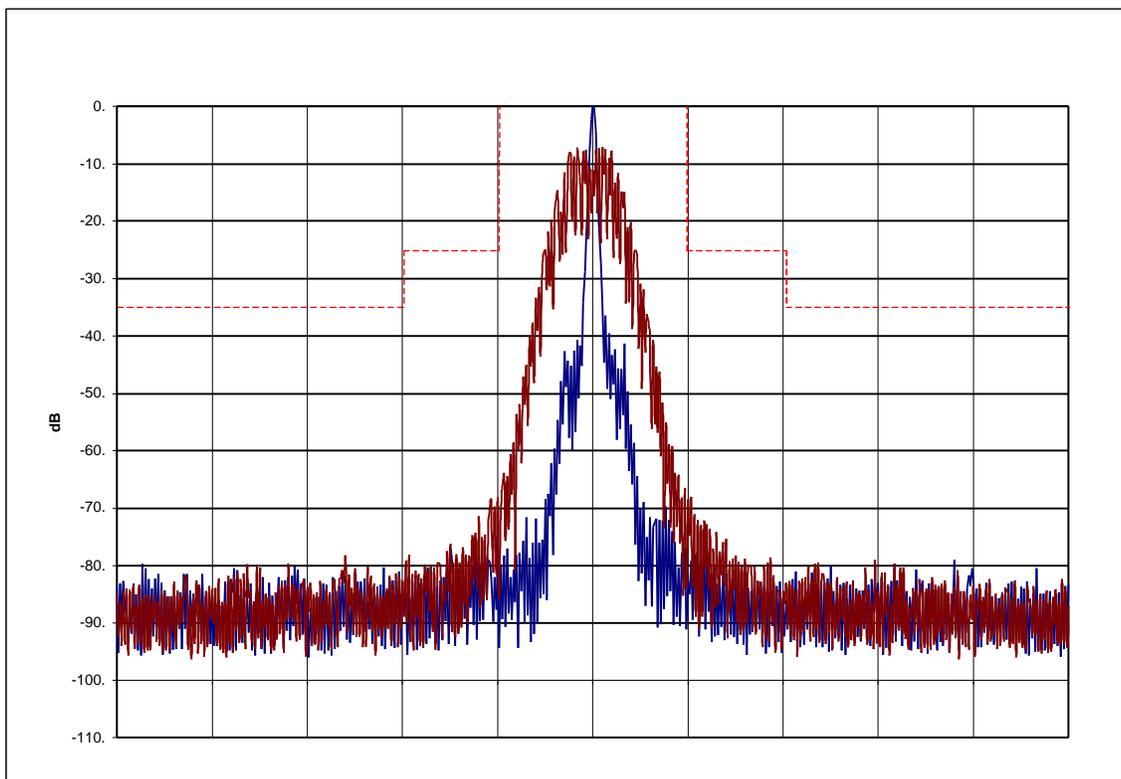

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(DTMF MODULATION & PL TONE MODULATION)**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

25Khz Channel Spacing

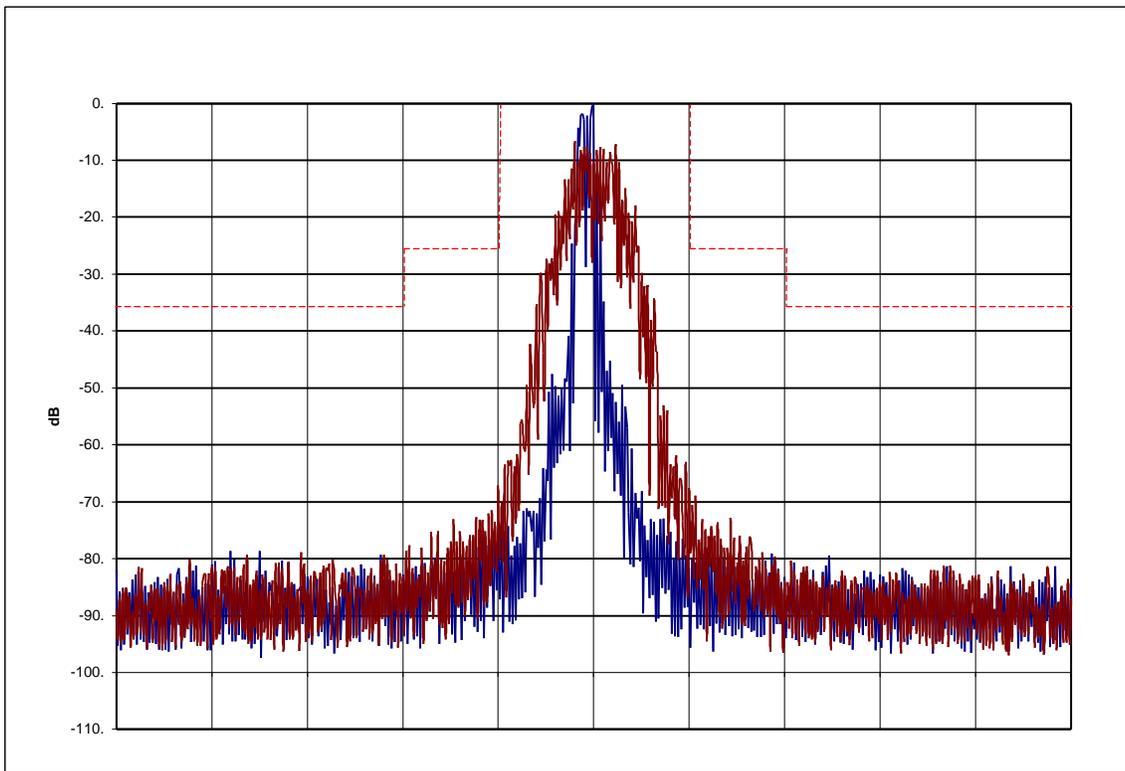

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(DTMF MODULATION & DPL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

25Khz Channel Spacing

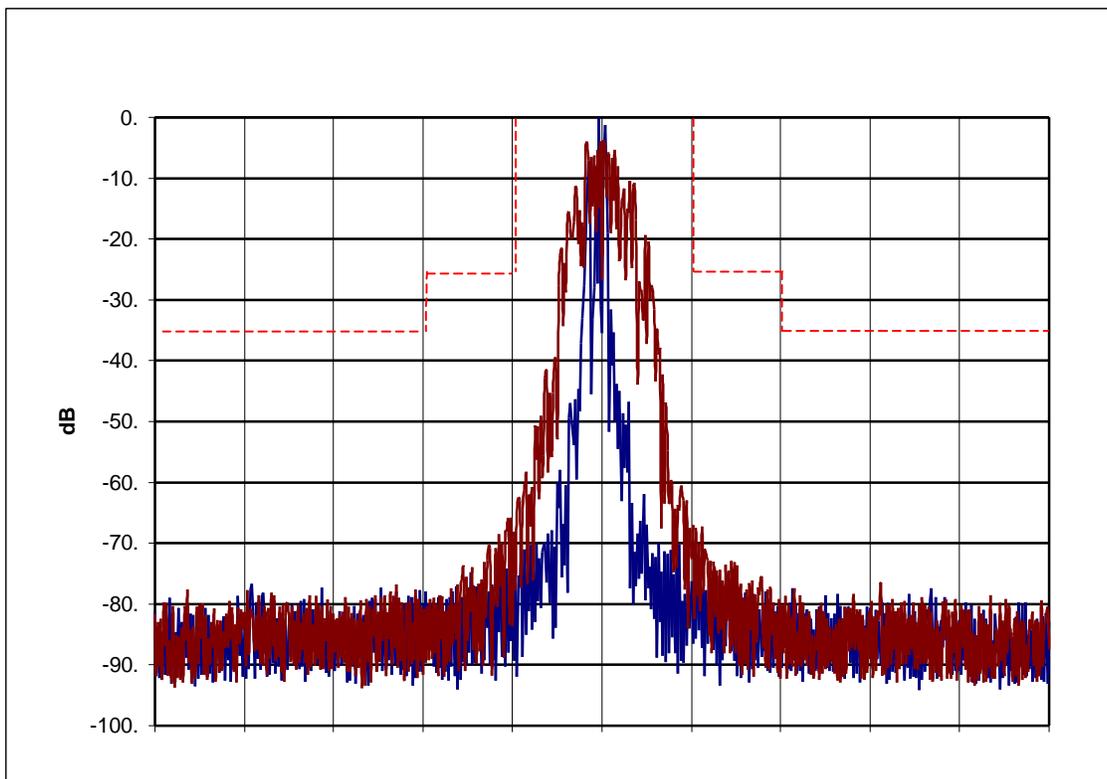

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask B

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(2500 HZ AUDIO MODULATION ONLY)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

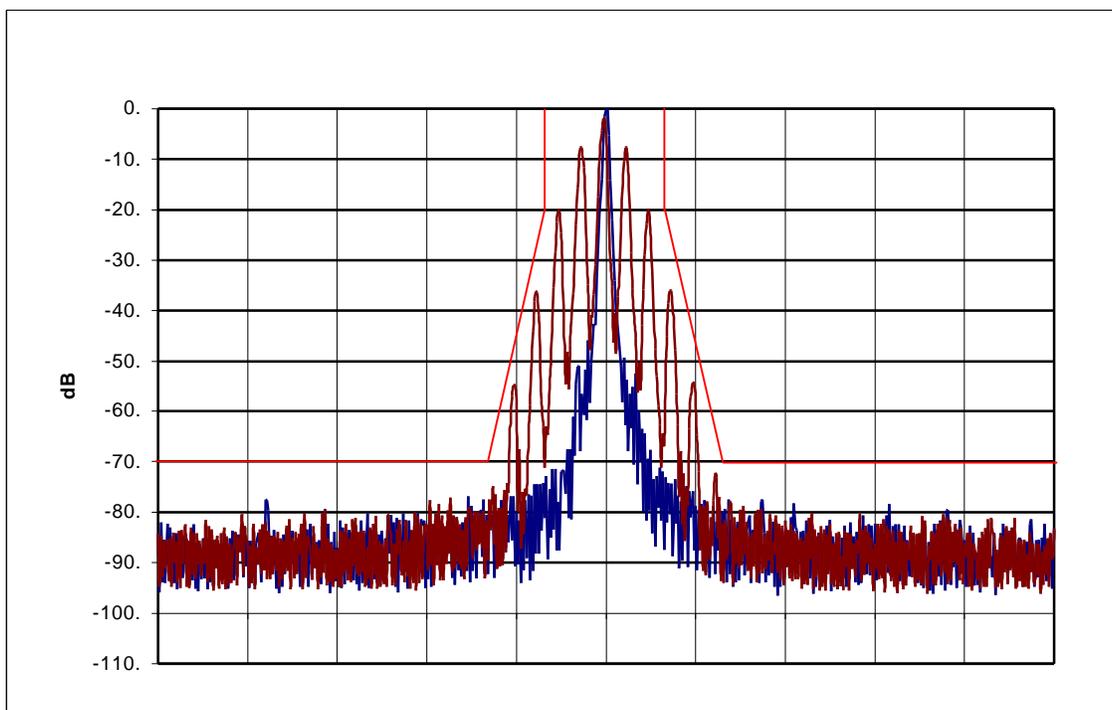

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(2500 HZ AUDIO & PL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

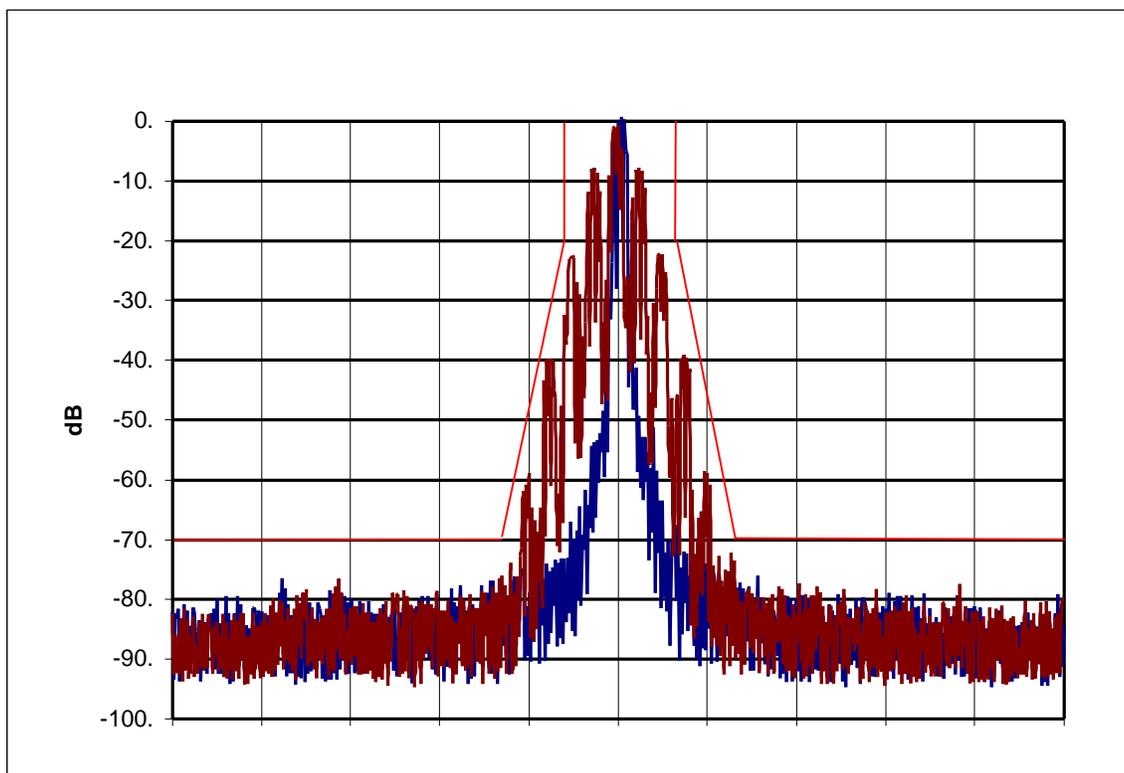

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(2500 HZ AUDIO & DPL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

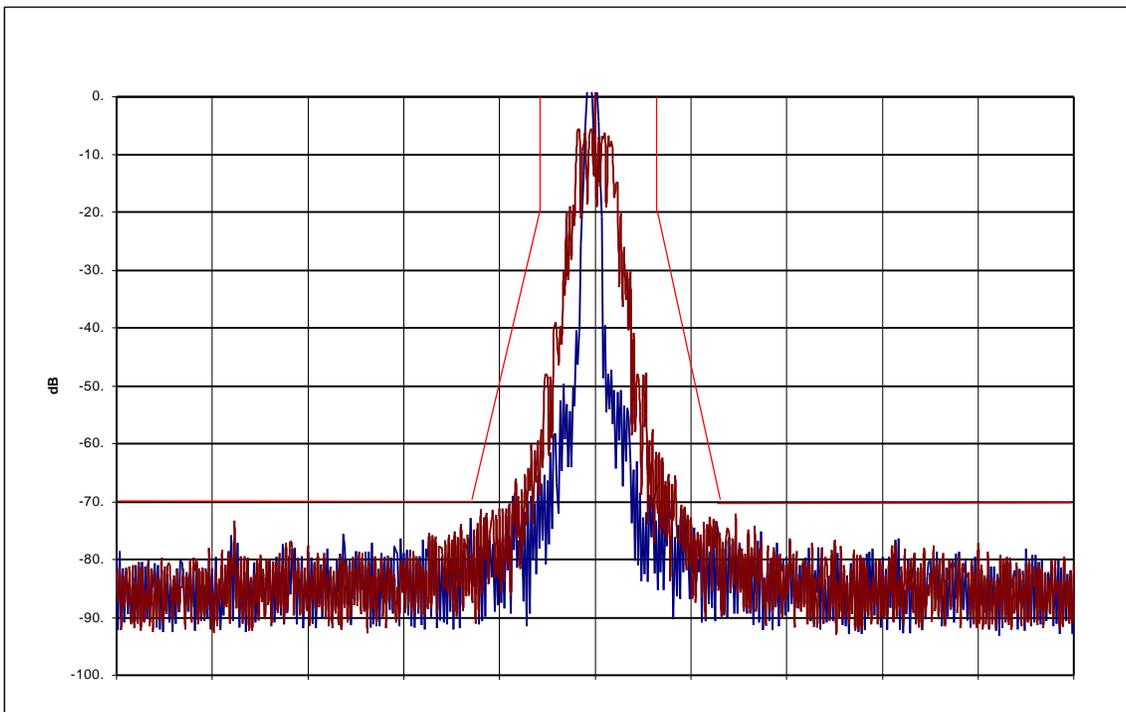

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.
OCCUPIED BANDWIDTH
(DTMF MODULATION ONLY)

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

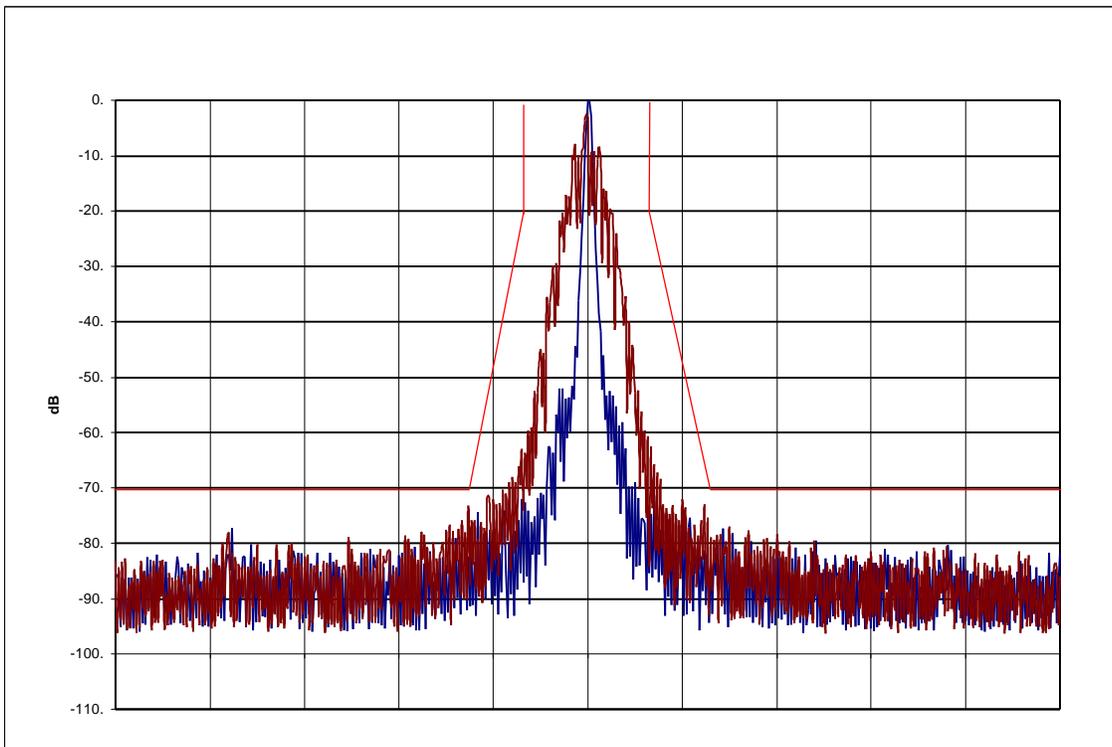

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(DTMF MODULATION & PL TONE MODULATION)**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

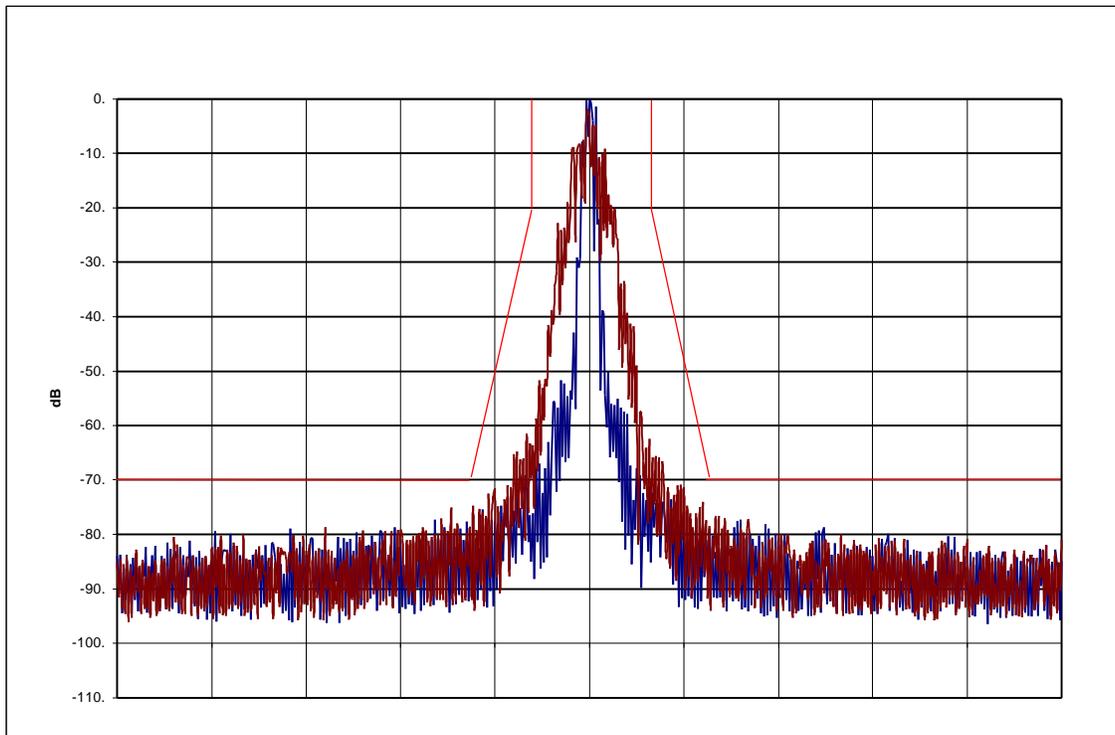

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.

**OCCUPIED BANDWIDTH
(DTMF MODULATION & DPL TONE MODULATION)**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

12.5Khz Channel Spacing

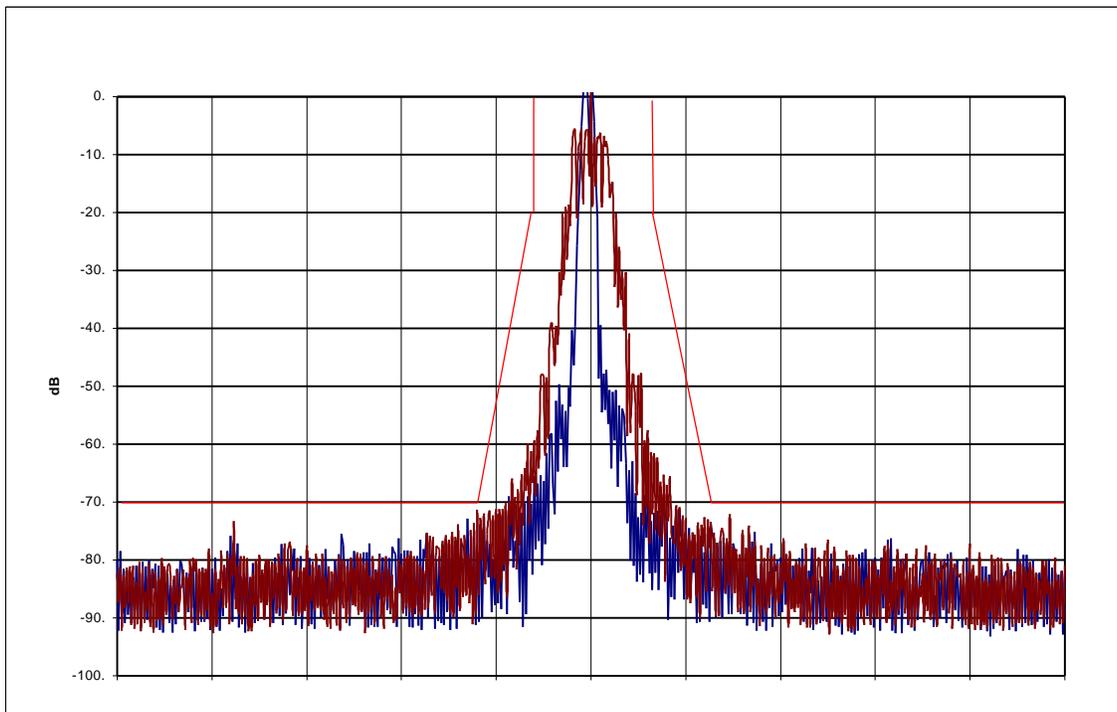

CENTER FREQUENCY(MHZ):	436.050
RESOLUTION BANDWIDTH(HZ):	300
VIDEO BANDWIDTH(KHZ):	300
SPAN(KHZ):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	5.8
ATTEN (dB)	30

Note: Emission Mask D

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

Xmtr Type : AZ489FT4837


Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 403.050Mhz.

Channel Spacing : 25KHz.

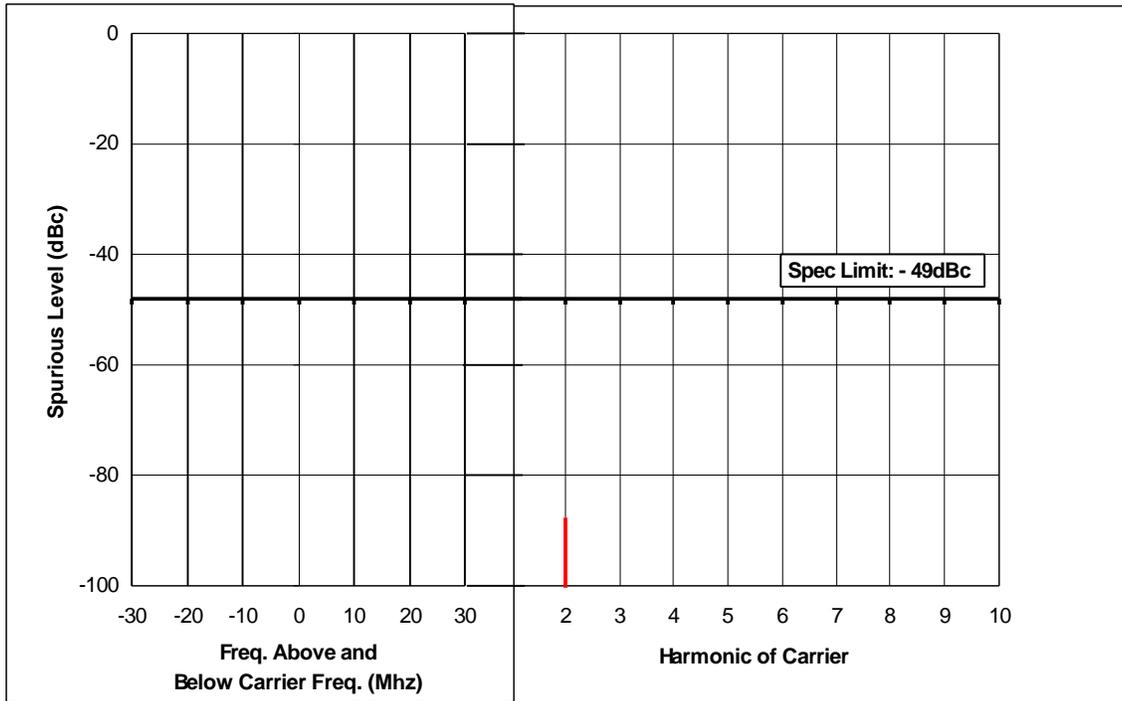

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 436.050Mhz.
Channel Spacing : 25KHz.

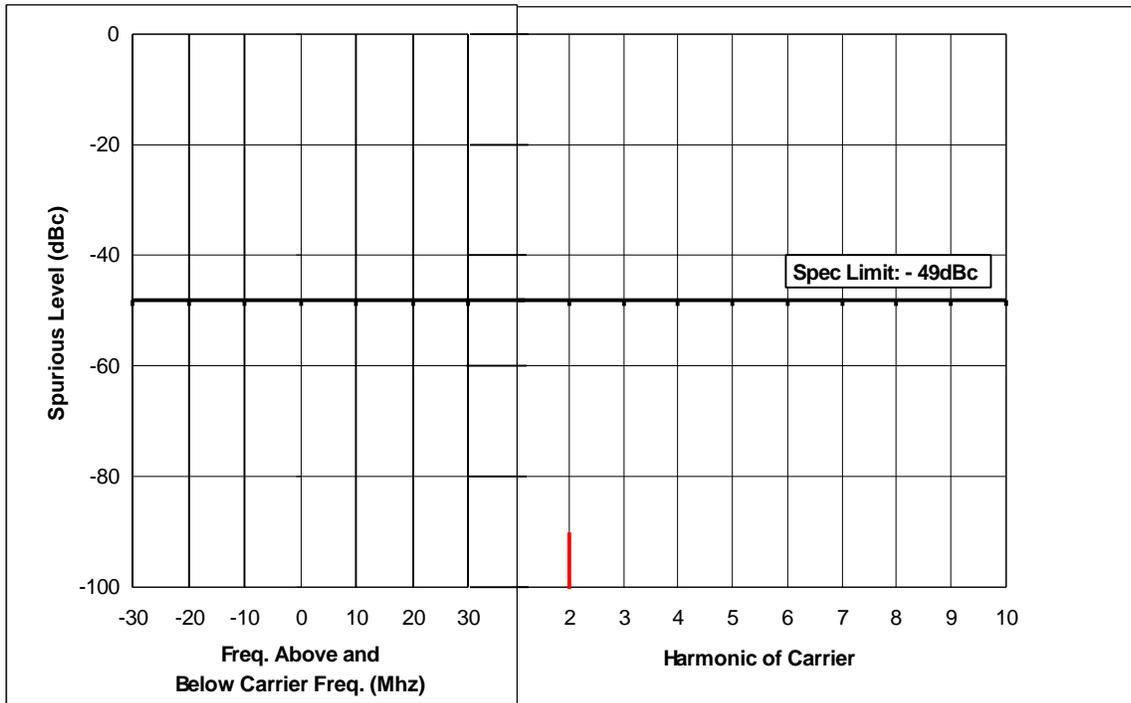

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 469.950Mhz.
Channel Spacing : 25KHz.

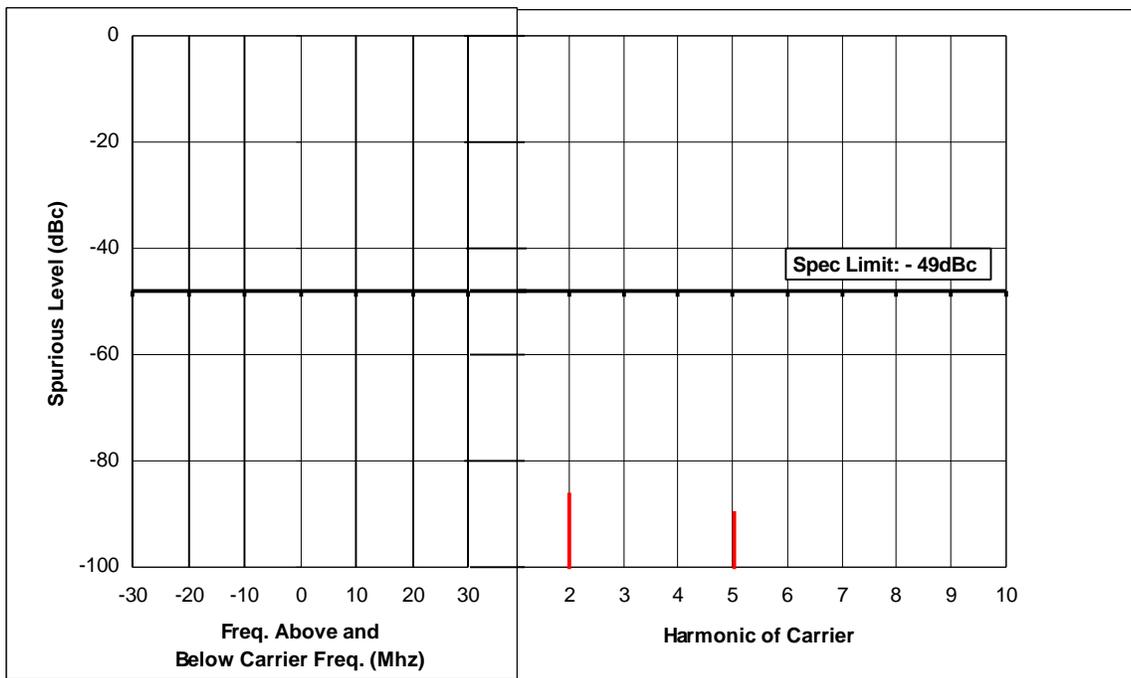

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 1W at 403.050Mhz.
Channel Spacing : 25KHz.

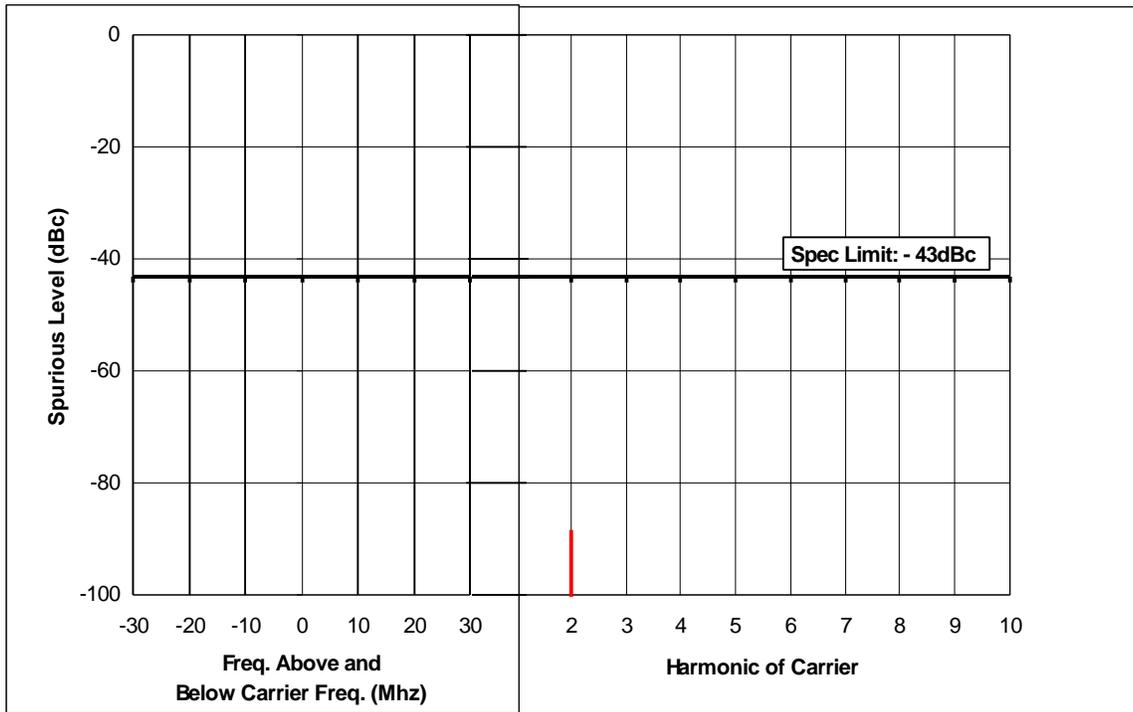

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 13th. May 1999

Signature : SF Ooi

Power Output : 1W at 436.050Mhz.
Channel Spacing : 25KHz.

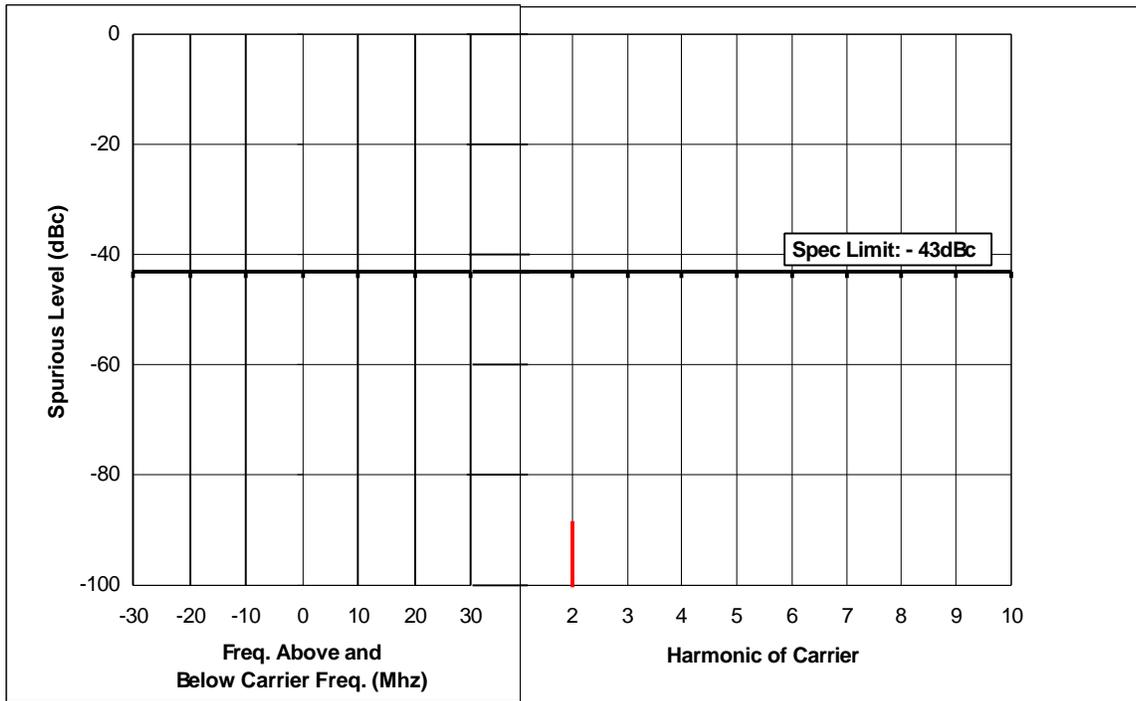

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 13th. May 1999

Signature : SF Ooi

Power Output : 1W at 469.950Mhz.
Channel Spacing : 25KHz.

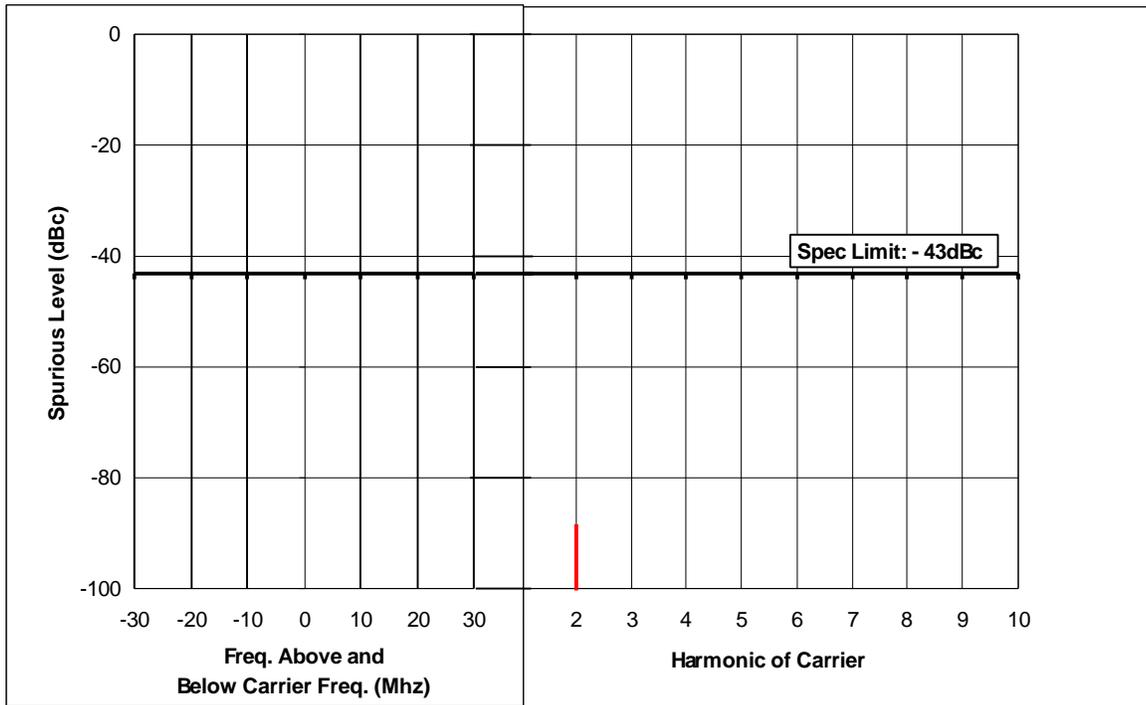

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

Xmtr Type : AZ489FT4837


Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 403.050Mhz.

Channel Spacing : 12.5KHz.

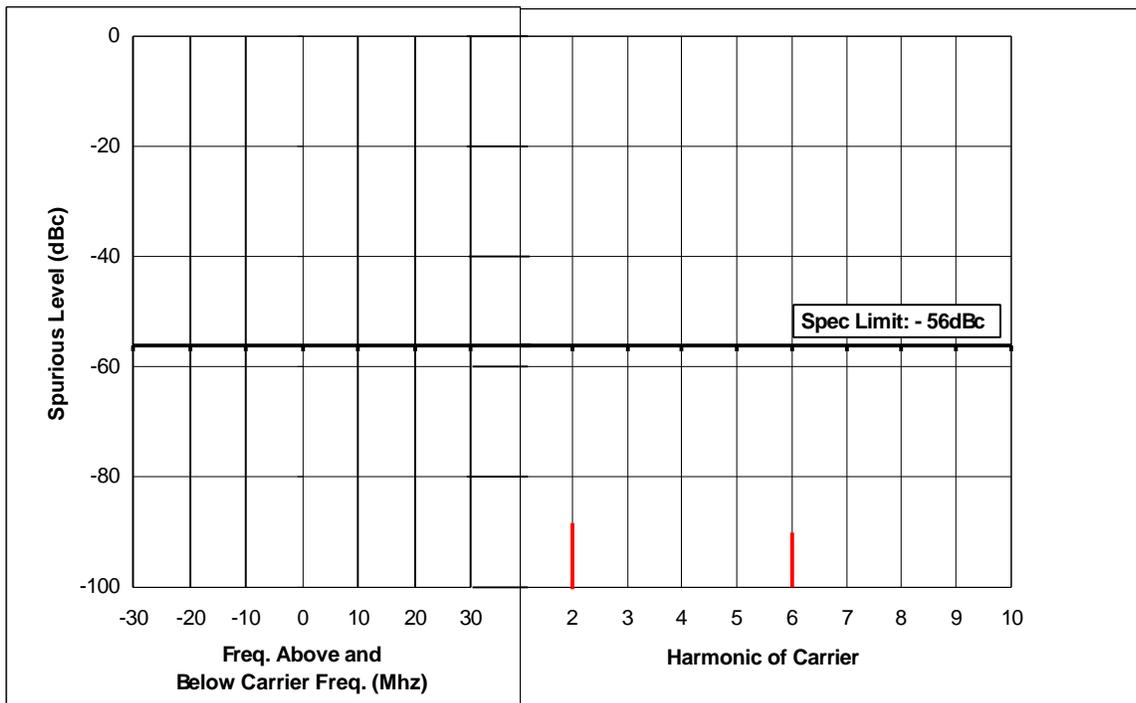

Note: Other emissions not reported were more than 35dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

Xmtr Type : AZ489FT4837


Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 436.050Mhz.

Channel Spacing : 12.5KHz.

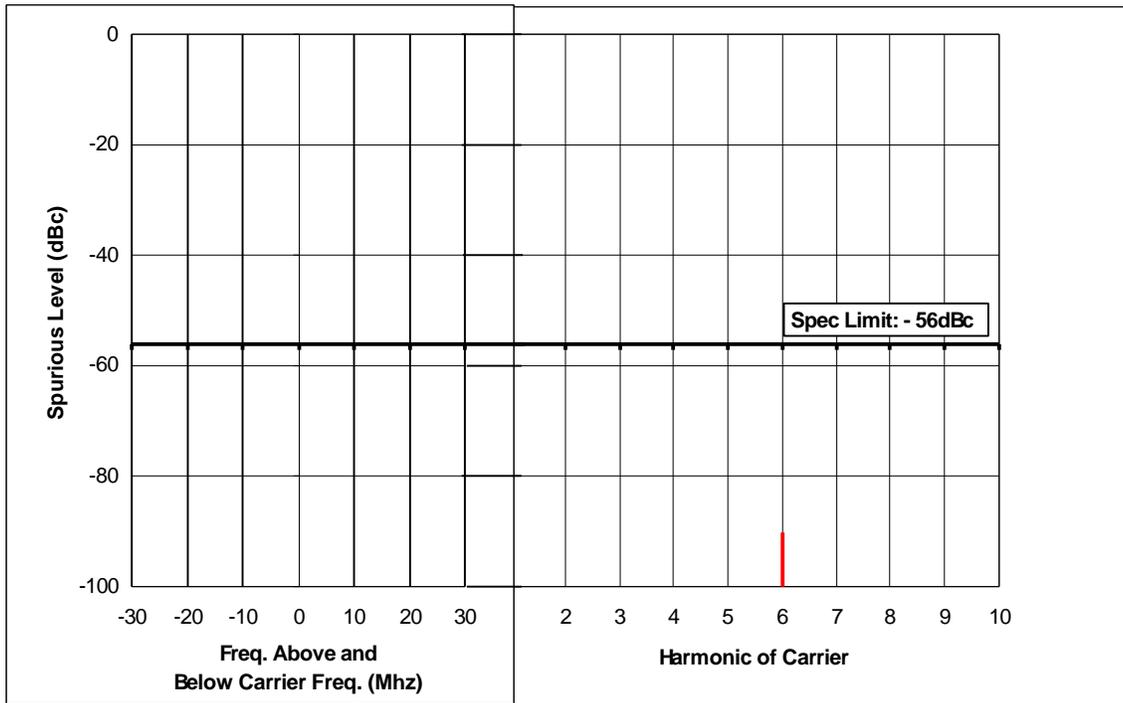

Note: Other emissions not reported were more than 35dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 4W at 469.950Mhz.
Channel Spacing : 12.5KHz.

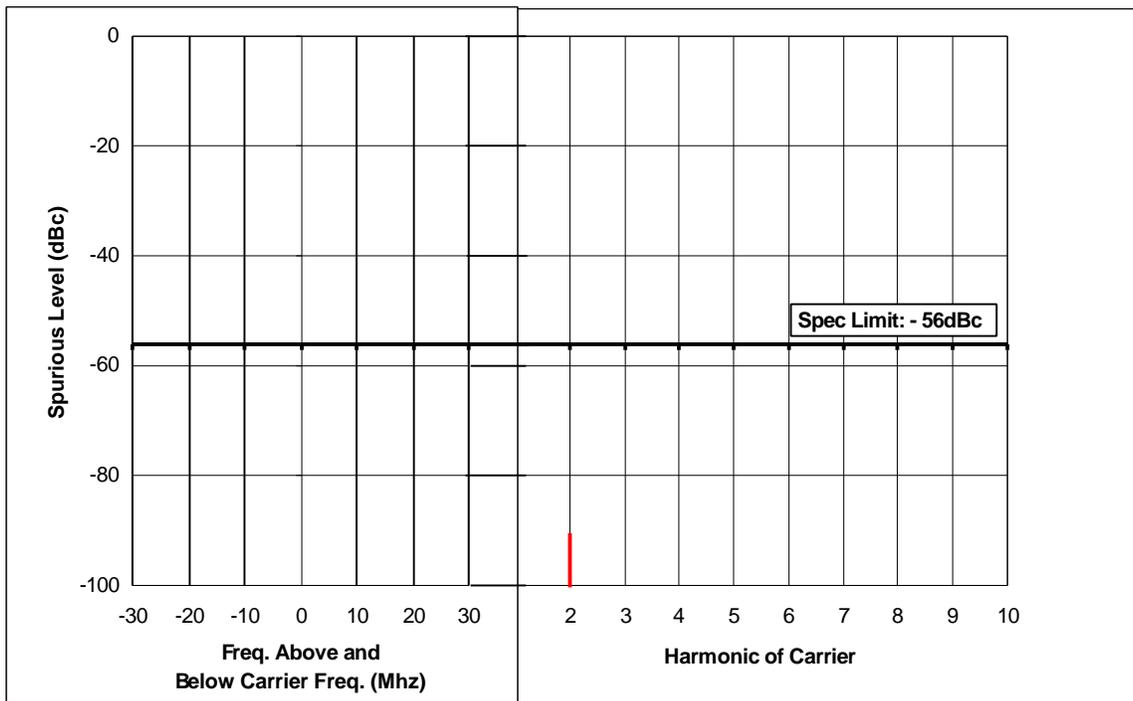

Note: Other emissions not reported were more than 35dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 1W at 403.050Mhz.
Channel Spacing : 12.5KHz.

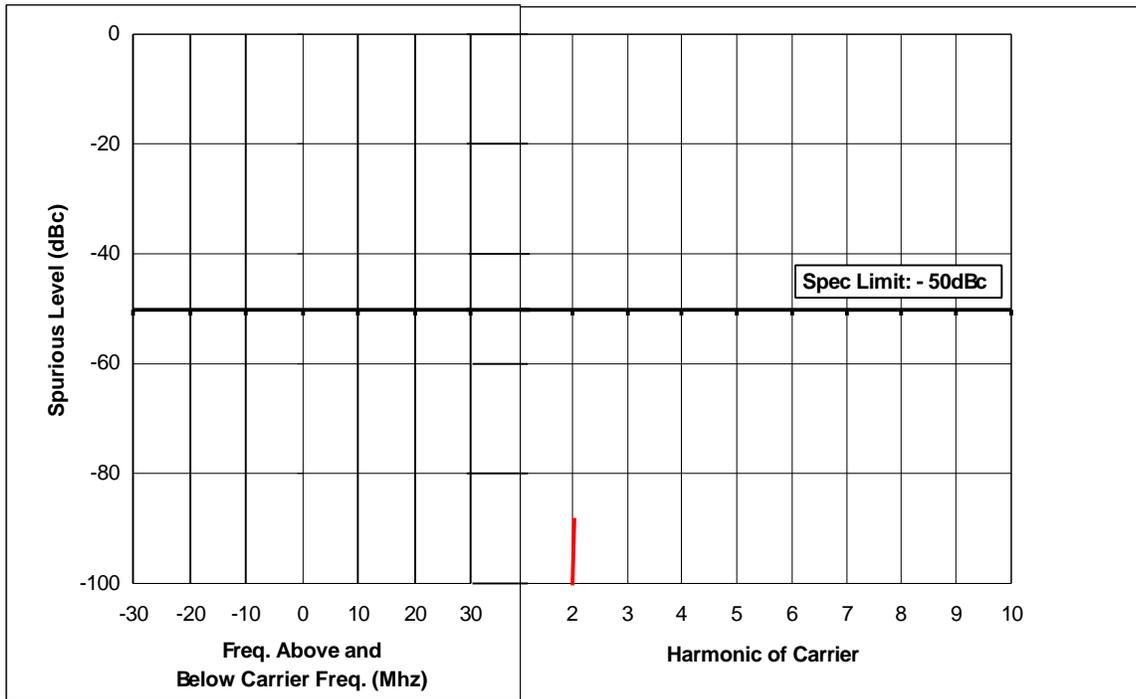

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====

Xmtr Type : AZ489FT4837


Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 1W at 436.050Mhz.

Channel Spacing : 12.5KHz.

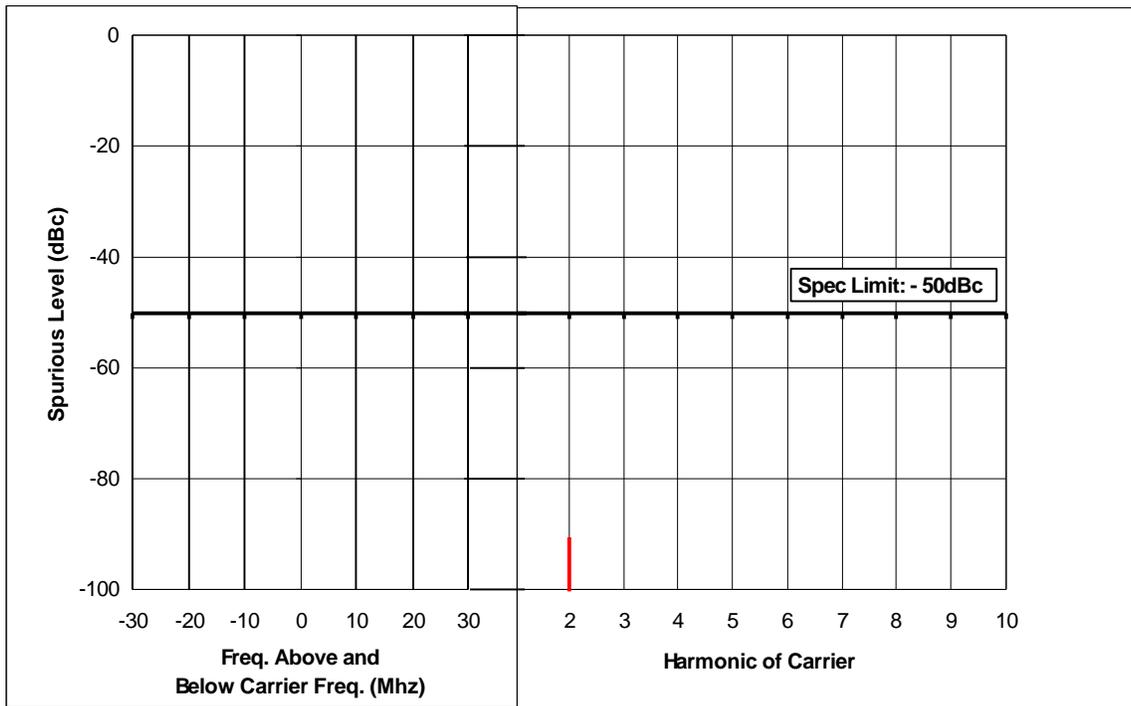

Note: Other emissions not reported were more than 40dB below the limit

MOTOROLA INC.

**TRANSMITTER SPURIOUS EMISSION CHARACTERISTIC
CONDUCTED SPURIOUS AND HARMONIC EMISSIONS**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power Output : 1W at 469.950Mhz.
Channel Spacing : 12.5KHz.

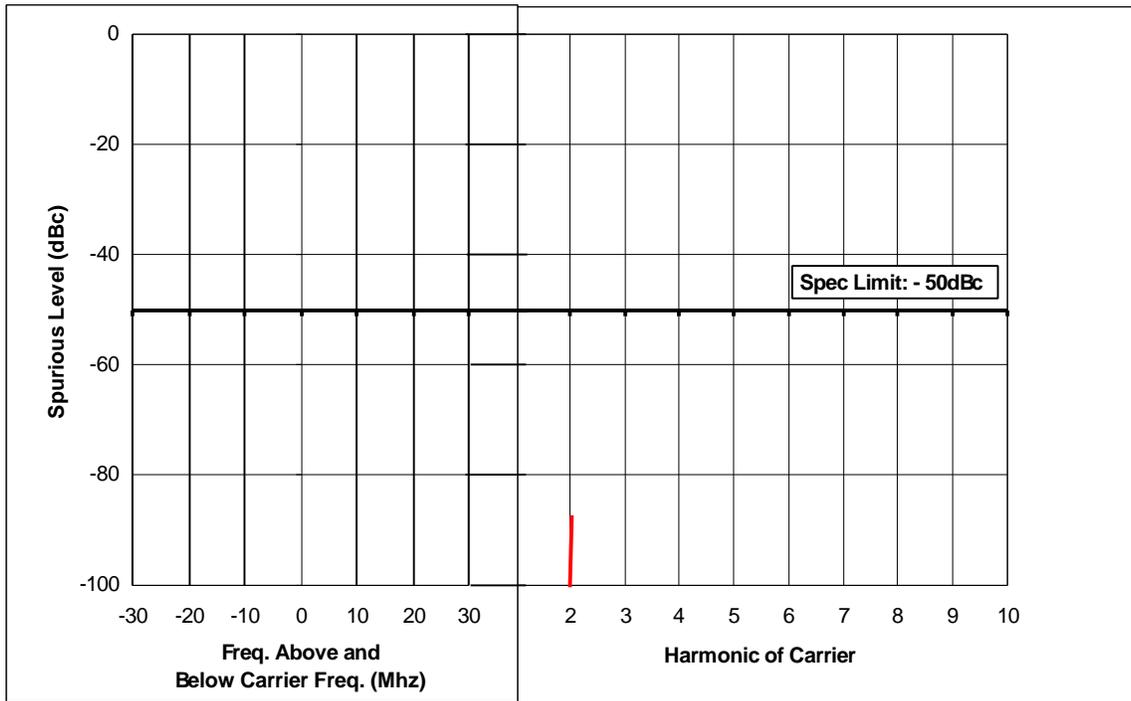


Note: Other emissions not reported were more than 40dB below the limit

Transmitter Radiated Spurious Emissions: UHF Radio


403.15 MHz - 4.0 W - 25 kHz CH. Spacing

Spur	Frequency (MHz)	FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac.	FCC Maximum Limit -20 (dBm) 12.5 kHz Ch. Spac.	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2X FUND	806.3000	-13	-20	-63.7	-50.9
3X FUND	1209.4500	-13	-20	-46.3	-42.5
4X FUND	1612.6000	-13	-20	-47.9	-50.5
5X FUND	2015.7500	-13	-20	-49.5	-48.9
6X FUND	2418.9000	-13	-20	-46.3	-50.3
7X FUND	2822.0500	-13	-20	-47.1	-46.8
8X FUND	3225.2000	-13	-20	-44.2	-43.3
9X FUND	3628.3500	-13	-20	-45.7	*
10XFUND	4031.5000	-13	-20	*	*

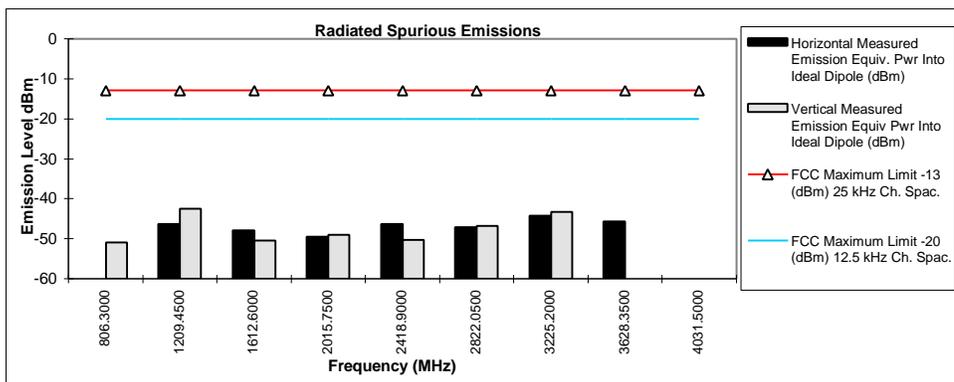

403.15 MHz - 1.0 W - 25 kHz CH. Spacing

Spur	Frequency (MHz)	FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac.	FCC Maximum Limit -20 (dBm) 12.5 kHz Ch. Spac.	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2X FUND	806.3000	-13	-20	-64.6	-62.4
3X FUND	1209.4500	-13	-20	-56.0	-55.4
4X FUND	1612.6000	-13	-20	*	*
5X FUND	2015.7500	-13	-20	*	*
6X FUND	2418.9000	-13	-20	*	*
7X FUND	2822.0500	-13	-20	*	*
8X FUND	3225.2000	-13	-20	*	*
9X FUND	3628.3500	-13	-20	*	*
10XFUND	4031.5000	-13	-20	*	*

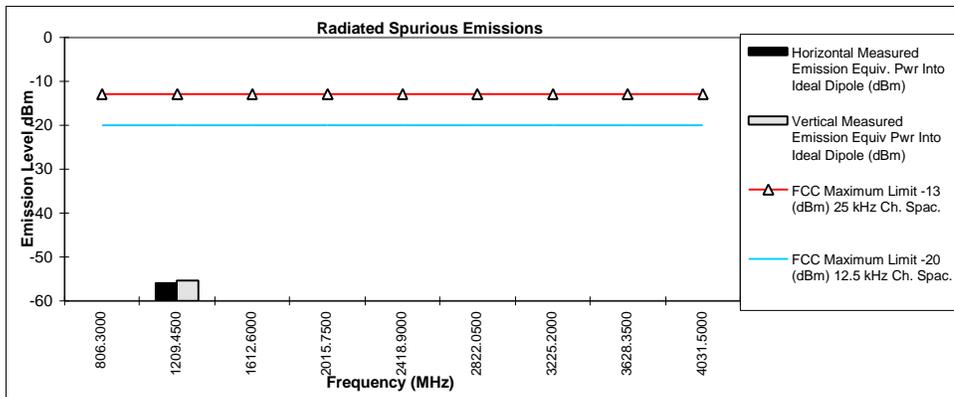


* Indicates the spurious emission was less than -60dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: UHF Radio


469.7 MHz - 4.0 W - 25 kHz CH. Spacing

Spur	Frequency (MHz)	FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac.	FCC Maximum Limit 20 (dBm) 12.5 kHz Ch. Spac.	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2X FUND	939.4000	-13	-20	*	*
3X FUND	1409.1000	-13	-20	-46.6	-43.1
4X FUND	1878.8000	-13	-20	-51.1	-48.4
5X FUND	2348.5000	-13	-20	-46.4	*
6X FUND	2818.2000	-13	-20	-46.7	-48.2
7X FUND	3287.9000	-13	-20	*	-43.8
8X FUND	3757.6000	-13	-20	*	*
9X FUND	4227.3000	-13	-20	*	*
10XFUND	4697.0000	-13	-20	*	*

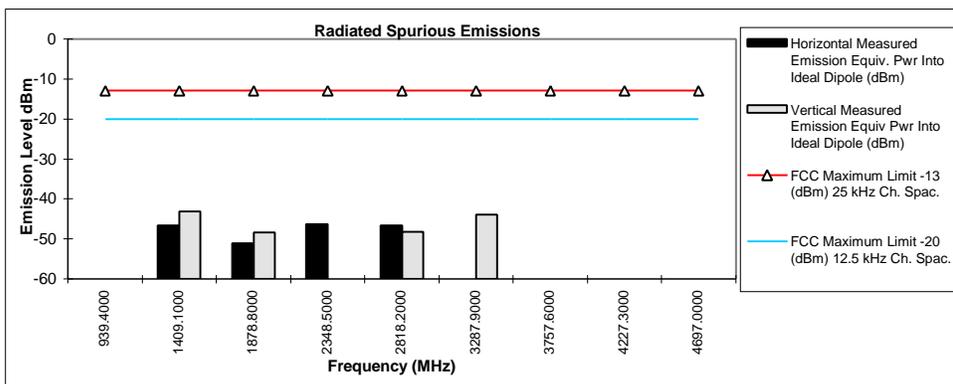

469.7 MHz - 1.0 W - 25 kHz CH. Spacing

Spur	Frequency (MHz)	FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac.	FCC Maximum Limit 20 (dBm) 12.5 kHz Ch. Spac.	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2X FUND	939.4000	-13	-20	*	*
3X FUND	1409.1000	-13	-20	-52.6	-48.8
4X FUND	1878.8000	-13	-20	*	*
5X FUND	2348.5000	-13	-20	*	*
6X FUND	2818.2000	-13	-20	*	*
7X FUND	3287.9000	-13	-20	*	*
8X FUND	3757.6000	-13	-20	*	*
9X FUND	4227.3000	-13	-20	*	*
10XFUND	4697.0000	-13	-20	*	*

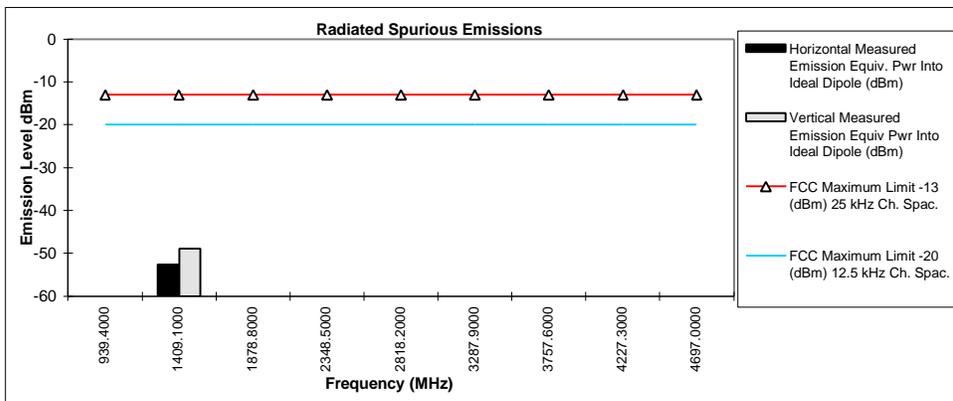

* Indicates the spurious emission was less than -60dBm or could not be detected due to noise limitations or ambients.

MOTOROLA INC.

**CRYSTAL OSCILLATOR STABILITY CHARACTERISTIC
FREQUENCY vs. TEMPERATURE**

=====


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

FREQ : 436.050MHZ.

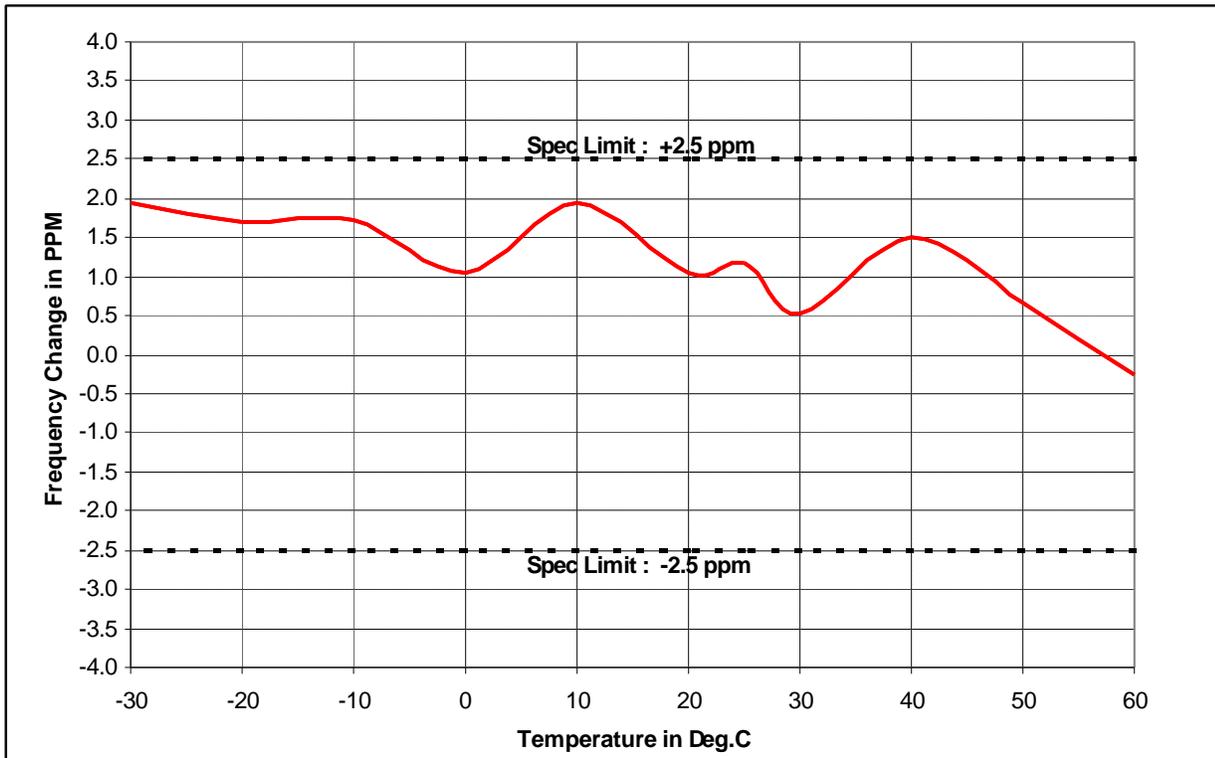

MOTOROLA INC.

**STABILITY CHARACTERISTIC
FREQUENCY vs. VOLTAGE**


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 13th. May 1999

Signature : SF Ooi

FREQ : 436.050MHZ

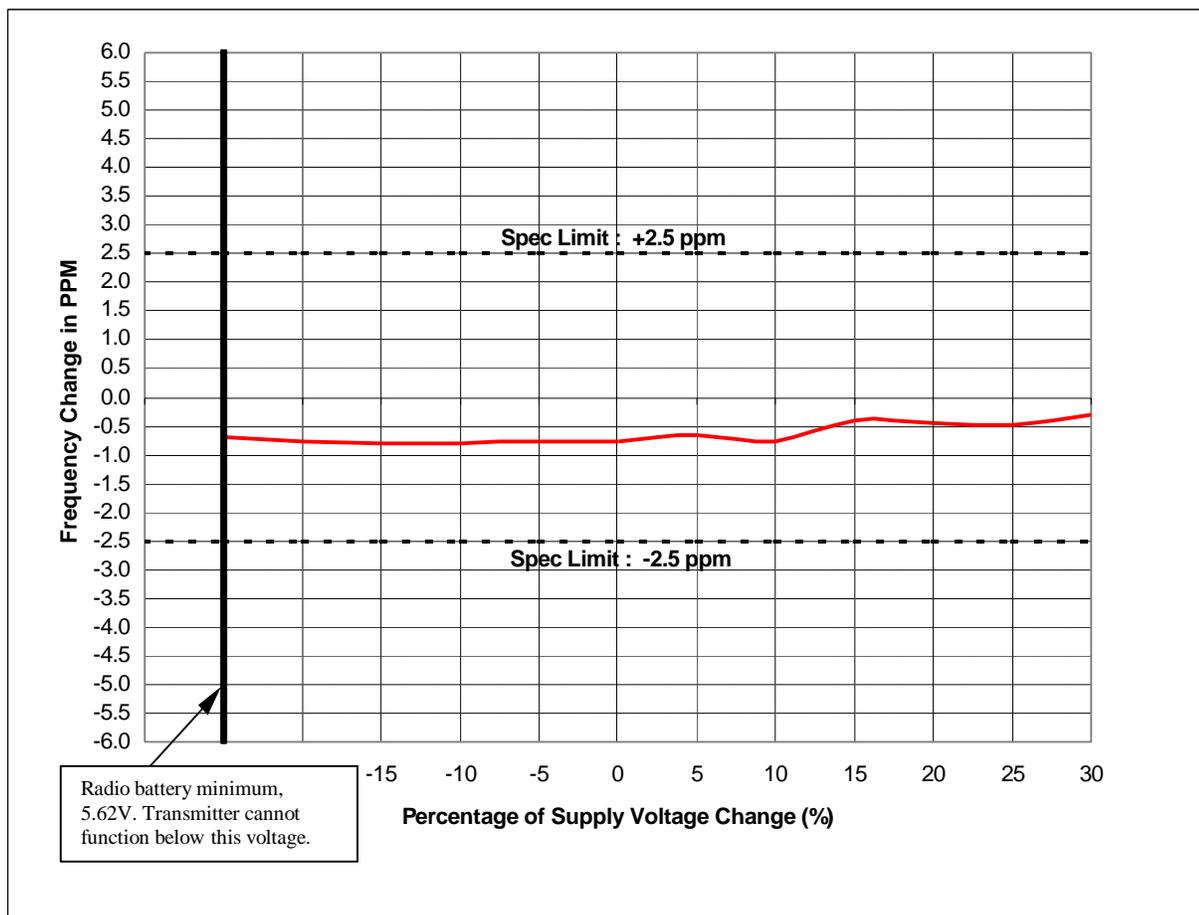

MOTOROLA INC.

TRANSIENT FREQUENCY BEHAVIOR

Xmtr Type : AZ489FT4837

Log Page : ---


Date : 14th. May 1999

Signature : SF Ooi

Power : 1W & 4W at 436.050MHz

Channel Spacing : 25KHz.

Switch - On Condition

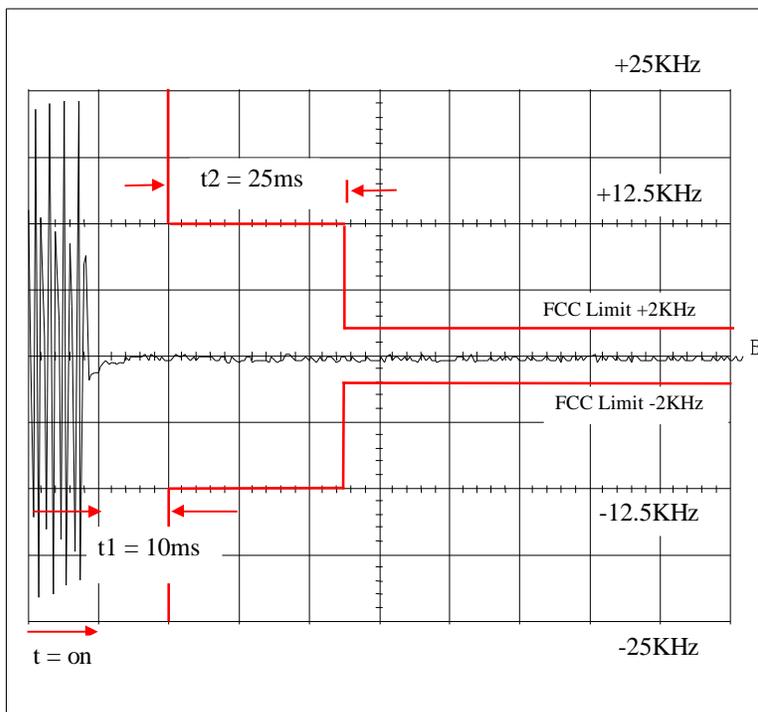

		B
ATN	64 mV	
CPL	0 V	
OFS	10 ms	
MTB	-9.8 ms	
DLY	512	
SMP	14-05-99	
DAT	04:36:28	
TIM		
ATN		
CPL		
OFS		
MTB		
DLY		
SMP		
DAT		
TIM		

MOTOROLA INC.

TRANSIENT FREQUENCY BEHAVIOR


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power : 1W & 4W at 436.050Mhz.
 Channel Spacing : 25KHz.
 Switch - Off Condition

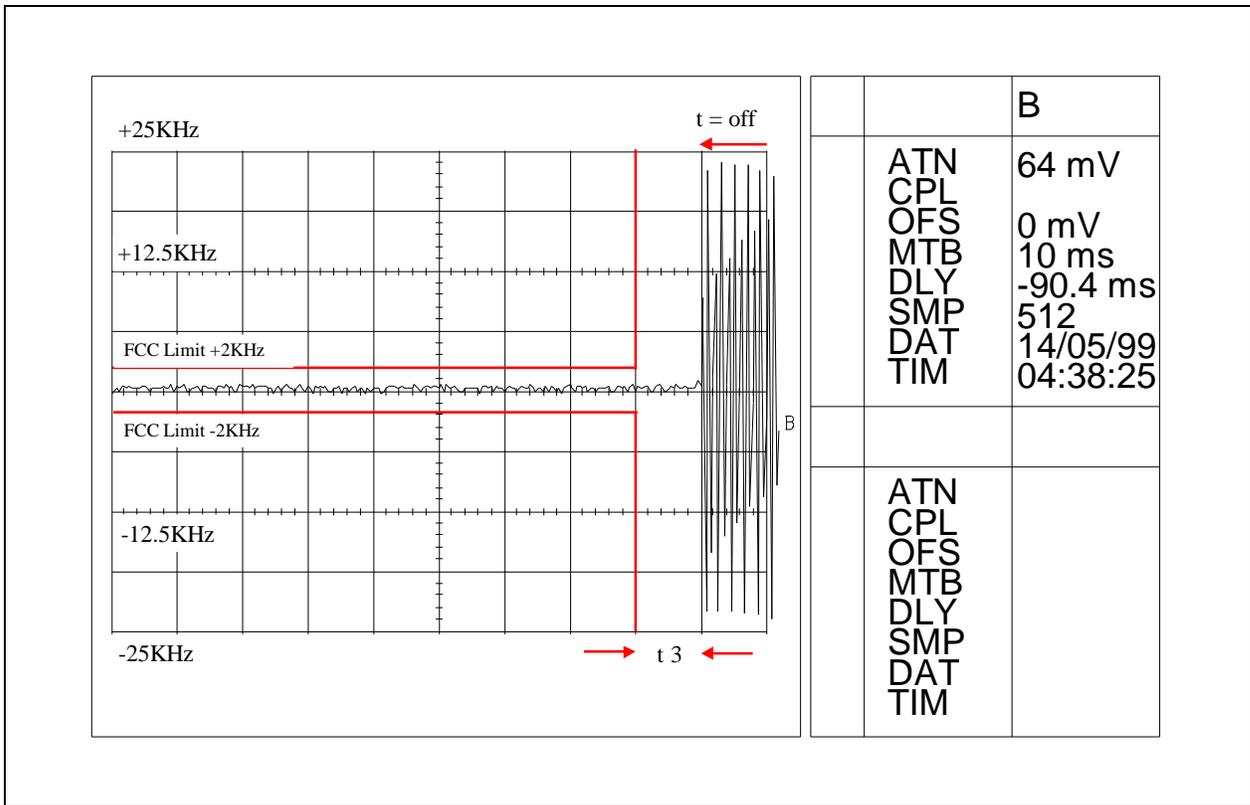

MOTOROLA INC.

TRANSIENT FREQUENCY BEHAVIOR


Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power : 1W & 4W at 436.050Mhz.
 Channel Spacing : 12.5KHz
 Switch - On Condition

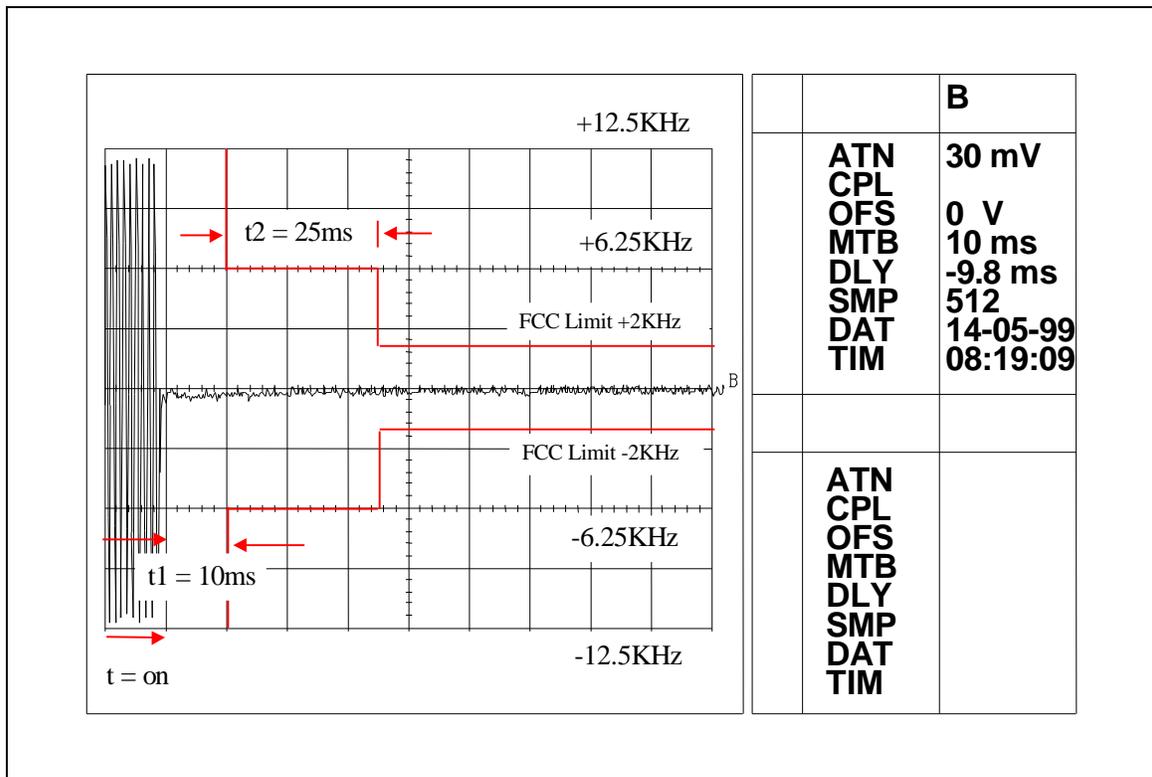

MOTOROLA INC.

TRANSIENT FREQUENCY BEHAVIOR

Xmtr Type : AZ489FT4837

Log Page : ---

Date : 14th. May 1999

Signature : SF Ooi

Power : 1W & 4W at 481.050Mhz.

Channel Spacing : 12.5KHz

Switch - Off Condition

