



TEST SET- UP PROCEDURES

Except where otherwise stated, all measurements are made following the Electronic Industries Association (EIA) Minimum Standard for Portable/Personal Land Mobile Communications FM or PM Equipment 25-1000 MHz- (TIA/EIA-603).

This exhibit presents a brief summary of how the measurements were made, the required limits, and the test equipment used.

The following procedures are presented with this application.

- | | | |
|----|------------------------------|---------------|
| 1. | RF Power Output | <u> </u> X |
| 2. | Audio Response | <u> </u> X |
| 3. | Low Pass Filter Response | <u> </u> X |
| 4. | Modulation Limiting | <u> </u> X |
| 5. | Occupied Bandwidth | <u> </u> X |
| 6. | Radiated Spurious Emissions | <u> </u> X |
| 7. | Frequency Stability | <u> </u> X |
| 8. | Transient Frequency Behavior | <u> </u> X |



MOTOROLA

FCC ID: AZ489FT4860

TEST EQUIPMENT LIST

Pursuant To FCC Rules 2.999

1. Spectrum Analyzer
 - A. HP 8591E
 - B. HP 8566
 - C. HP35665A
2. RF Signal Generators
 - A. HP 8665
 - B. HP 8642
 - C. HP 8656
3. RF Milli-voltmeter
 - A. Boonton 4200
 - B. Boonton 4210
4. RF Loads

A. WEINSCHEL M1418

5. Dipole Antenna Set
 - A. Singer DM-105A series
 - B. EMCO Model 3120
6. RF Power Meters
 - A. HP 436A
 - B. 8482B Power Sensor
 - C. 30 dB High Power Pad
7. Monitor Receivers
 - A. Motorola Comm Syst Analyzer
 - B. HP8901
8. Tenny Temperature Chamber
9. Frequency Counters
 - a. HP 5385A
10. Audio Analyzer
 - a. HP8903B
11. AC/DC Voltmeters
 - a. Fluke8012A Digital Multimeter
12. HP8901B Modulation Analyzer


EXHIBIT 7A

RF POWER OUTPUT

Pursuant FCC Rules 2.1046(a)

Method of Measurement:

1. The EUT is placed at 1 m height, centered on a turntable, and positioned facing the test antenna that is horizontally polarized.
2. The test antenna is located 3m from the EUT and the output connected to the measuring receiver.
3. With the EUT placed in transmit mode, the test antenna is raised and lowered through a height of 1m to 4m until a maximum signal level is detected by the measuring receiver. This level is recorded in dBm.
4. The EUT is then rotated through 360° in 45° intervals on the horizontal plane, each time measuring the maximum signal level as described in step 3.
5. The EUT is then replaced by a tuned dipole (substitution antenna) corresponding to the test frequency of the EUT.
6. The substitution antenna is connected to a calibrated signal generator.
7. The input signal to the substitution antenna is then adjusted to produce the same peak signal level as recorded by the measuring receiver with the EUT using the procedure described in step 3.
8. The input level to the substitution antenna is recorded as power level in dBm, corrected for any gain of the antenna and change of input attenuator setting (path loss) of the measuring receiver if applicable.
9. The test antenna is then oriented for vertical polarization and steps 1 to 8 repeated.
10. The measure of the maximum effective radiated power is the largest level recorded at the input to the substitution antenna, corrected for the path loss if necessary.

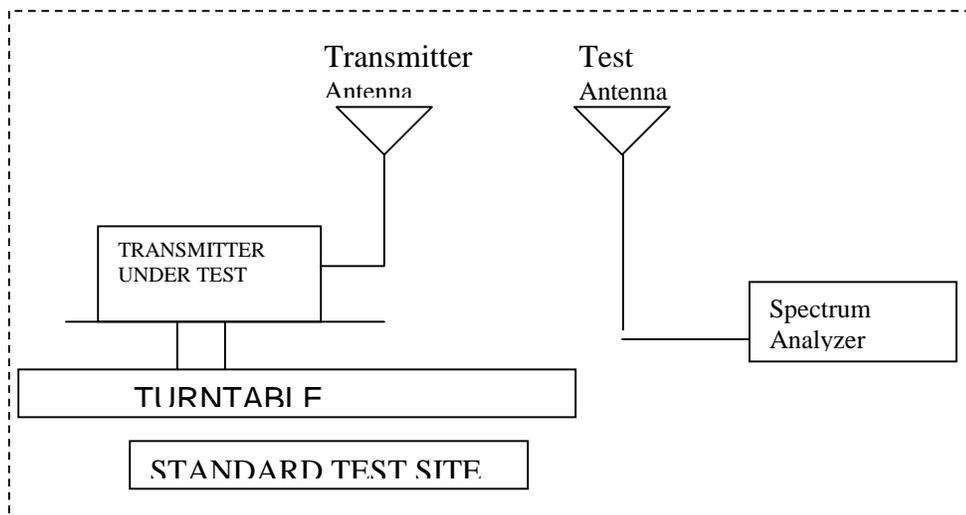



AUDIO FREQUENCY RESPONSE

Pursuant FCC Rules 2.987 (a)

Method of Measurement

Operate the transmitter under standard test conditions and monitor the output with a frequency deviation meter or calibrated test receiver. With 1000 Hz sine wave audio input applied through a dummy microphone circuit, adjust the audio input to give 30% of full rated system deviation. Maintaining constant deviation, vary the input frequency from 100 to 5000 Hz, and observe the level necessary to maintain a constant 30% modulation.

Minimum Standard

The audio frequency response shall not vary more than +1 or -3 dB from 300 to 3000 Hz as referenced to 1000 Hz level (with the exception of a permissible 6 dB/octave roll off from 2500-3000 Hz)

POST LIMITER FILTER FREQUENCY RESPONSE

Pursuant FCC Rules 2.987 (a)

FCC Limits—Per applicable rule parts.

A. 25 to 450 MHz

Frequencies between 3 kHz and 15 kHz shall be attenuated greater than the attenuation at 1 kHz by $40 \log_{10}(f/3)$ dB. Frequencies above 15 kHz shall be attenuated 28 dB.

B. 450 to 866 MHz

Frequencies between 3 kHz and 20 kHz shall be attenuated greater than the attenuation at 1 kHz by $60 \log_{10}(f/3)$ dB. Frequencies above 20 kHz shall be attenuated at least 50 dB.

MODULATION LIMITING

Pursuant FCC Rules 2.987 (a)

Method of Measurement

The transmitter shall be adjusted for full rated system deviation. Adjust the audio input for 60% of rated system deviation at 1000 Hz. Using this level as a reference (0 dB) vary the audio input level from the reference to a level 20 dB above it for modulation frequencies of 300, 1000 and 3000 Hz. Record the system deviation obtained as a function of the input level.

FCC Limits

Minimum Standard - The transmitter modulation must not exceed rated system deviation at any audio frequency input or reasonable change in input level.



MOTOROLA

FCC ID: AZ489FT4860

OCCUPIED BANDWIDTH

Pursuant to FCC Rules 2.989

Method of Measurement

Data on occupied bandwidth is presented in the form of a spectrum analyzer photograph, which illustrates the transmitter sidebands. A photograph is taken of the unmodulated carrier, for reference, to which is superimposed the sideband display generated by modulating the carrier with a 2500 Hz tone at a level 16 dB greater than that required to produce 50 percent modulation. If tone or digital coded squelch is indicated, photographs using both the 2500 Hz tone and the indicated squelch signal are used to modulate the transmitter. During these measurements, the instantaneous Deviation Control is set for a maximum of +2.5 kHz.

FCC Limits - Per Applicable Rule Parts.

Measured Data: On any frequency removed from the assigned frequency up to 5.625 kHz, the spec is 0 dB. On any frequency removed from the assigned frequency from 5.625 kHz up to and including 12.5 kHz, the spec is at least 7.27(f_d-2.88 kHz) dB down. On any frequency removed from the assigned frequency by more than 12.5 kHz, the spec is at least 50+10log(P) dB (mean output power in watts) or 70 decibels whichever is the lesser attenuation.



RADIATED SPURIOUS EMISSIONS

Pursuant to FCC Rules 2.993

Test Site:

The site, located at Plantation, Florida in a region, which is reasonably free from RF interference and has been approved by the Commission for Spurious Measurements.

The equipment is placed on the turntable and then placed in normal operation using the intended power source. A broadband receiving antenna located 15 ft. from the transmitter picks up any signal radiated from the transmitter and its operation accessories. The antenna is adjustable in height and can be horizontally and vertically polarized. A spectrum analyzer covering the necessary frequency range is used to detect and measure any radiation picked up by the antenna.

FREQUENCY STABILITY

Pursuant to FCC Rule 2.995

Method of Measurement:

A. Temperature (Non-heated type crystals oscillators):

Frequency measurements are made at the extremes of the temperature range -30 to +50 degrees centigrade and at intervals of not more than 10 degrees centigrade through out the range. Sufficient time is allowed prior to each measurement for the circuit components to stabilize.

B. Power Supply Voltage:

The primary voltage was varied from 80% to 120% of the normal supply voltage. Voltage is measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC Limits—Per 2.995 (1) & (2) and Applicable Rule Parts.

Temperature - Frequency Stability of $\pm .00025\%$ from -30 to +50 degrees centigrade (-20 to + 50 degrees centigrade Maritime parts 81 & 83).

Power Supply Voltage - Frequency Stability of $\pm .0005\%$ from 85% to 115% of nominal voltage. (See CFR Rule Part 90.213 Page 329)

*Per Applicable Rule Parts.



TRANSIENT FREQUENCY BEHAVIOR

Pursuant to FCC Rule 90.214

Transient frequency behavior is a measure of the difference, as a function in time, of the actual transmitter frequency to the assigned transmitter frequency when the transmitted RF output power is switched on or off.

Setup—Per TIA/EIA-603, Section 2.2.19

Connect the output port of the transmitter under test to an attenuator and this to a directional coupler. Connect an RF peak detector to the coupled output of the directional coupler and connect the output of the RF peak detector to the external trigger on a storage scope. The output of the directional coupler is mixed, via an RF combining network, with the output of a signal generator. Verify that the

Approximately 40 dB below the maximum input level of the test receiver as per step (f). Set the signal generator at the same frequency as the transmitter under test, modulated with a 1 kHz tone, with an FM deviation equal to the assigned channel spacing (+25 kHz). Following step (h), adjust the signal generator to

Provide 20 dB less power at the combiner output than the level set in step (f). Connect the output of the RF combiner to a test receiver. Connect the test receiver's output port to the vertical input channel of the storage scope. Adjust the horizontal sweep rate on the oscilloscope to 10 msec/div and adjust the vertical amplitude to display the 1 kHz tone at +/- 4 divisions centered on the display. Reduce the transmit attenuator by 30 dB as per step (l) so that the difference in power between the reference signal and the transmitter signal at the combiner is 50 dB when the transmitter is turned on. Following step (k), adjust the oscilloscope to trigger on an increasing signal from the RF detector at one division from the left side of the display when the transmitter is turned on. Switch on the transmitter and record the display (For RF Output Power ON.)

Following step (q), adjust the oscilloscope trigger controls to trigger on a decreasing signal from the RF peak detector, at 1 division from the right side of the display when the transmitter is turned off. Switch off the transmitter and record the display (For RF Output Power OFF).

Steps (f), (h), (k), (l), (q) Section 2.2.19 of the TIA/EIA-603 were followed.

Method of Measurement -- Per TIA/EIA-603

For RF Output Power ON: Turn the transmitter ON. Once the demodulator output has been captured by the transmitter power, the 1 kHz test signal will be completely suppressed. This point in time is named T-on. The display will then show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. Two time intervals will be measured following T-on: T-1 and T-2.

So, the RF ON time intervals are as follows: T-on -----> T-1 -> T-2

For RF Output Power OFF: Turn the transmitter OFF. The display will show the transmitter frequency difference versus time, and when the 1 kHz test signal starts to rise, it indicates total absence of the transmitter output at the specified frequency. This point is named T-off. Time interval T-3 precedes T-off.

So, the RF OFF time intervals are as follows: T-3 -----> T-off

FCC Limits—Per 90.214.

Frequency Range (MHz)

Time Interval

30 to 300



MOTOROLA

FCC ID: AZ489FT4860

300 to 500
500 to 1000

T-1

5.0 ms
10.0 ms
20.0 ms

T-2

20.0 ms
25.0 ms
50.0 ms

T-3

5.0 ms
10.0 ms
10.0 ms

EXHIBIT 7G