

EXHIBIT 6 Part 2

INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6G – Radiated Spurious Emissions (12 Graphs)

- 6G-1 – 4 Watt, 435.025 MHz, 12.5 kHz Channel Spacing
& 4 Watt, 457.525 MHz, 12.5 kHz Channel Spacing
- 6G-2 – 4 Watt, 479.975 MHz, 12.5 kHz Channel Spacing
- 6G-3 – 4 Watt, 435.025 MHz, 25 kHz Channel Spacing
& 4 Watt, 457.525 MHz, 25 kHz Channel Spacing
- 6G-4 – 4 Watt, 479.975 MHz, 25 kHz Channel Spacing
- 6G-5 – 2 Watt, 435.025 MHz, 12.5 kHz Channel Spacing
& 2 Watt, 457.525 MHz, 12.5 kHz Channel Spacing
- 6G-6 – 2 Watt, 479.975 MHz, 12.5 kHz Channel Spacing
- 6G-7 – 2 Watt, 435.025 MHz, 25 kHz Channel Spacing
& 2 Watt, 457.5250 MHz, 25 kHz Channel Spacing
- 6G-8 – 2 Watt, 479.975 MHz, 25 kHz Channel Spacing

EXHIBIT 6H – Frequency Stability (2 Graphs)

- 6H-1 – Frequency Stability vs. Temperature
- 6H-2 – Frequency Stability vs. Supply Voltage

EXHIBIT 6I – Transient Frequency Behavior (8 Graphs)

- 6I-1 – 4 Watt, 457.525MHz, 12.5 kHz Key-Up Attack Time
- 6I-2 – 4 Watt, 457.525MHz, 12.5 kHz De-Key Decay Time
- 6I-3 – 4 Watt, 457.525MHz, 25 kHz Key-Up Attack Time
- 6I-4 – 4 Watt, 457.525MHz, 25 kHz De-Key Decay Time

EXHIBIT 6J – Power Line Conducted Spurious Emissions (3 Graphs)

- 6J-1 – Radio off Line/Neutral
- 6J-2 – Radio on Rx Line/Neutral 435.025MHz
- 6J-3 – Radio on Rx Line/Neutral 457.525MHz
- 6J-4 – Radio on Rx Line/Neutral 479.975MHz
- 6J-5 – Radio on Tx Line/Neutral 435.025MHz
- 6J-6 – Radio on Tx Line/Neutral 457.525MHz
- 6J-7 – Radio on Tx Line/Neutral 479.975MHz

EXHIBIT 6G

Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

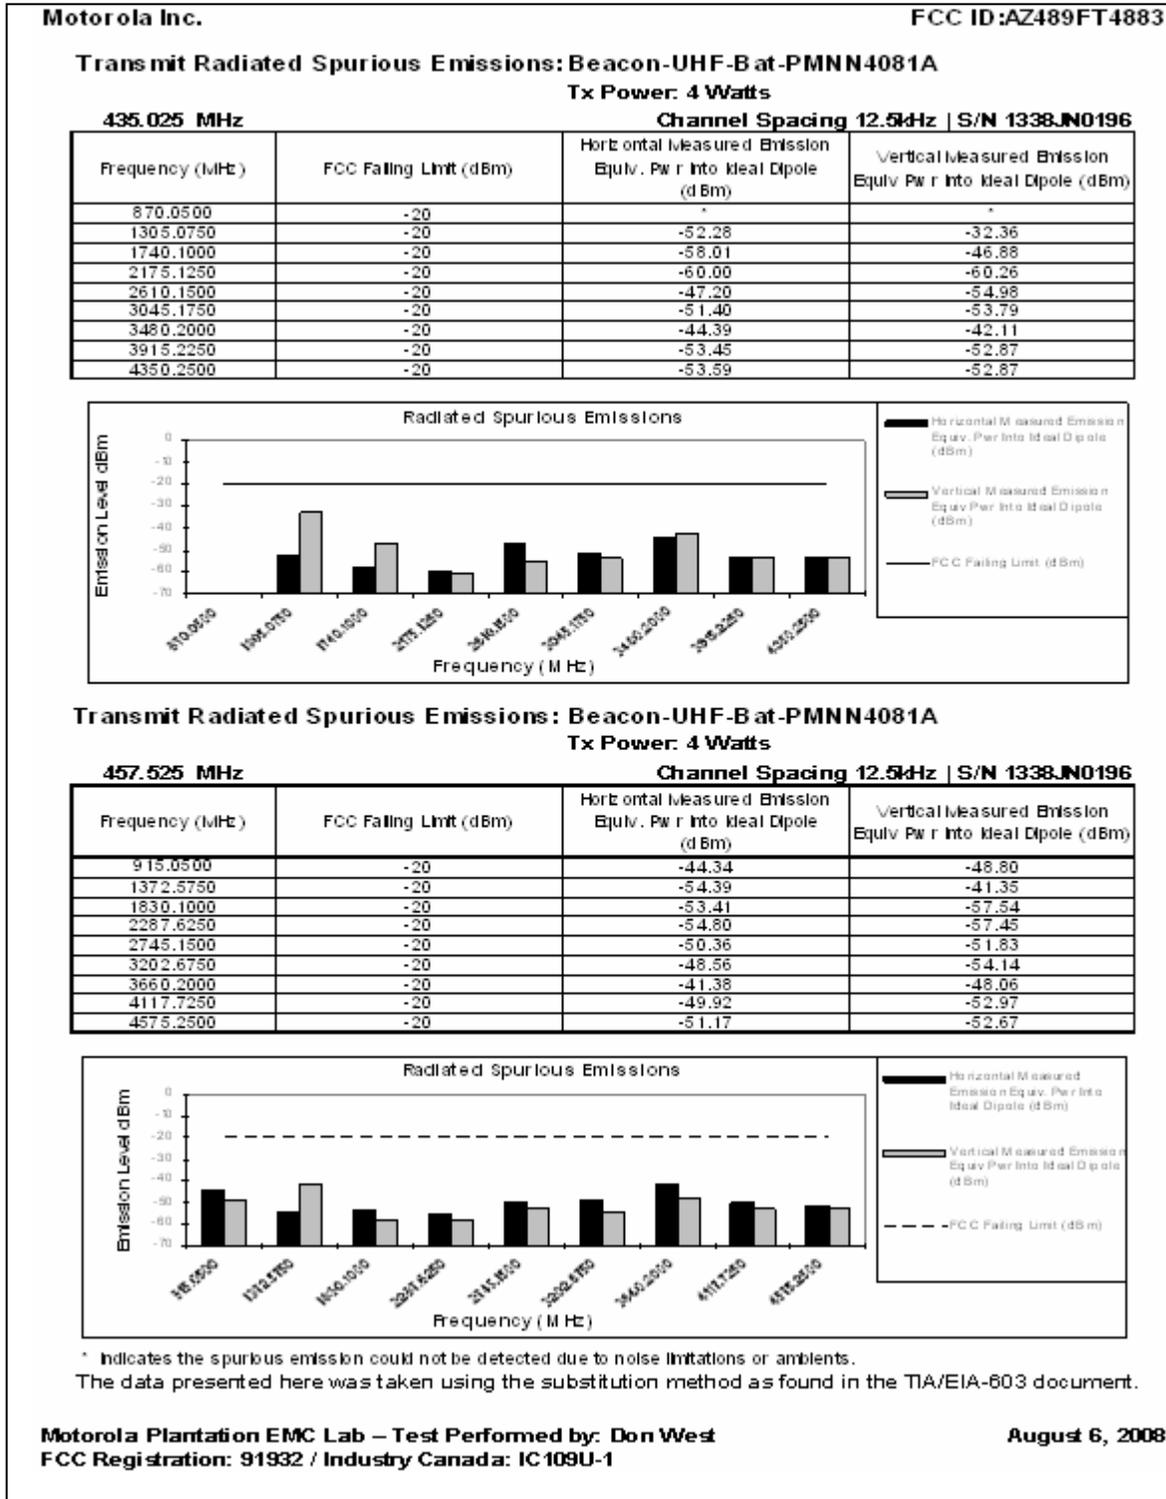


Figure 6G-1: 4 Watts, 435.025 MHz, 12.5 kHz Channel Spacing & 4 Watts, 457.525 MHz, 12.5 kHz Channel Spacing

Motorola Inc.


FCC ID:AZ489FT4883

Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A
Tx Power: 4 Watts

479.975 MHz

Channel Spacing 12.5kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Power Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Power Into Ideal Dipole (dBm)
959.9500	-20	-45.59	-45.53
1439.9250	-20	-52.15	-40.08
1919.9000	-20	-47.39	-52.64
2399.8750	-20	-50.94	-58.95
2879.8500	-20	-47.92	-50.85
3359.8250	-20	-45.95	-43.90
3839.8000	-20	-49.30	-51.46
4319.7750	-20	-45.40	-51.26
4799.7500	-20	-50.76	*

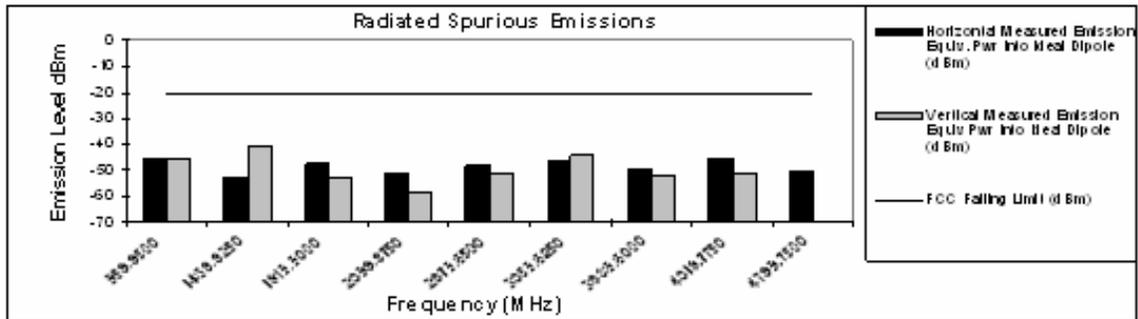

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West
FCC Registration: 91932 / Industry Canada: IC109U-1

August 6, 2008

Figure 6G-2: 4 Watts, 479.975 MHz, 12.5 kHz Channel Spacing

Motorola Inc.

FCC ID:AZ489FT4883


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 4 Watts

435.025 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Falling Unit (dBm)	Horizontal Measured Emission Eqiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Eqiv Pwr Into Ideal Dipole (dBm)
870.0500	-13	-	-
1305.0750	-13	-47.05	-30.25
1740.1000	-13	-59.68	-52.69
2175.1250	-13	-57.69	-61.76
2610.1500	-13	-48.59	-54.70
3045.1750	-13	-50.59	-53.77
3480.2000	-13	-46.11	-44.41
3915.2250	-13	-53.36	-51.72
4350.2500	-13	-50.12	-50.13

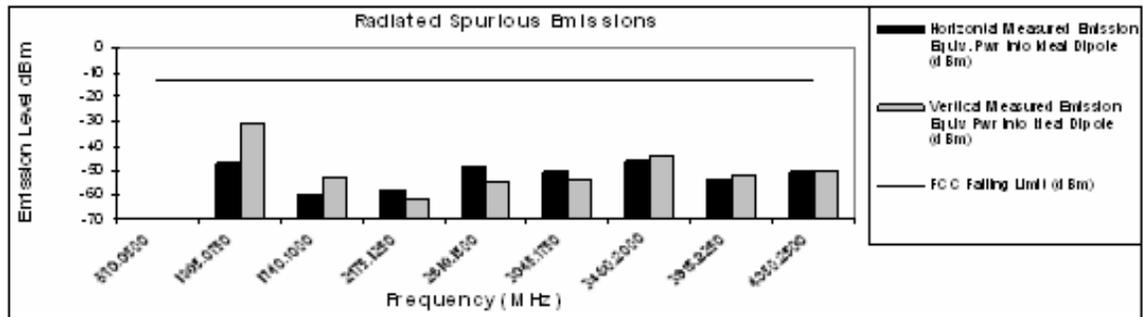


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 4 Watts

457.525 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Falling Unit (dBm)	Horizontal Measured Emission Eqiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Eqiv Pwr Into Ideal Dipole (dBm)
915.0500	-13	-43.03	-42.67
1372.5750	-13	-46.05	-32.65
1830.1000	-13	-53.69	-58.22
2287.6250	-13	-55.12	-57.97
2745.1500	-13	-50.60	-51.87
3202.6750	-13	-51.86	-55.87
3660.2000	-13	-42.72	-49.44
4117.7250	-13	-51.51	-52.91
4575.2500	-13	-52.34	-53.34

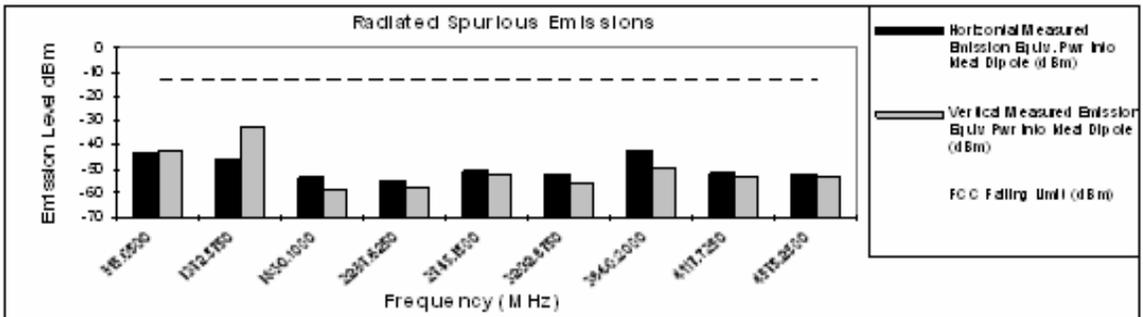

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West
 FCC Registration: 91932 / Industry Canada: IC109U-1

August 7, 2008

Figure 6G-3: 4 Watts, 435.025 MHz, 25 kHz Channel Spacing & 4 Watts, 457.525 MHz, 25 kHz Channel Spacing

Motorola Inc.


FCC ID:AZ489FT4883

Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A
Tx Power: 4 Watts

479.975 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
959.9500	-13	-40.06	-38.96
1439.9250	-13	-40.63	-32.64
1919.9000	-13	-49.10	-55.05
2399.8750	-13	-48.59	-53.92
2879.8500	-13	-48.69	-50.89
3359.8250	-13	-49.93	-43.75
3839.8000	-13	-49.12	-51.75
4319.7750	-13	-49.84	-48.45
4799.7500	-13	-49.60	-51.93

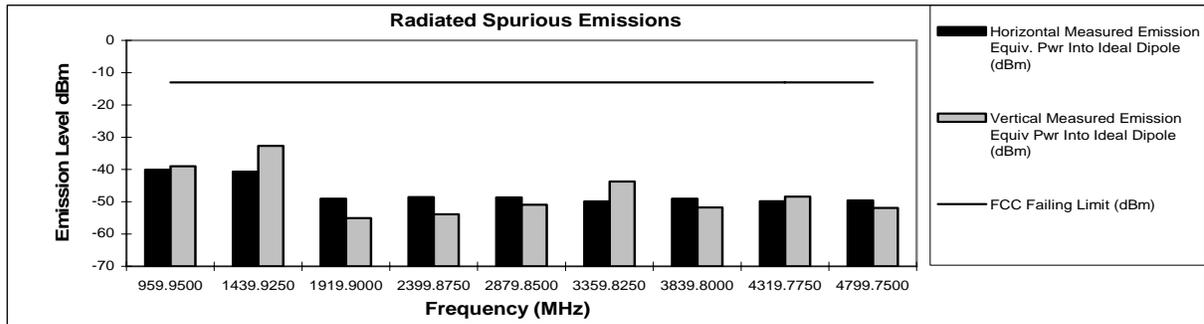

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West
FCC Registration: 91932 / Industry Canada: IC109U-1

August 7, 2008

Figure 6G-4: 4 Watts, 479.975 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 2 Watts

435.025 MHz

Channel Spacing 12.5kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.0500	-20	*	*
1305.0750	-20	-51.58	-35.71
1740.1000	-20	-55.88	-46.10
2175.1250	-20	-46.30	-55.38
2610.1500	-20	-49.62	-52.42
3045.1750	-20	-49.47	-53.70
3480.2000	-20	-44.76	-43.64
3915.2250	-20	-50.70	-55.26
4350.2500	-20	-54.34	-51.04

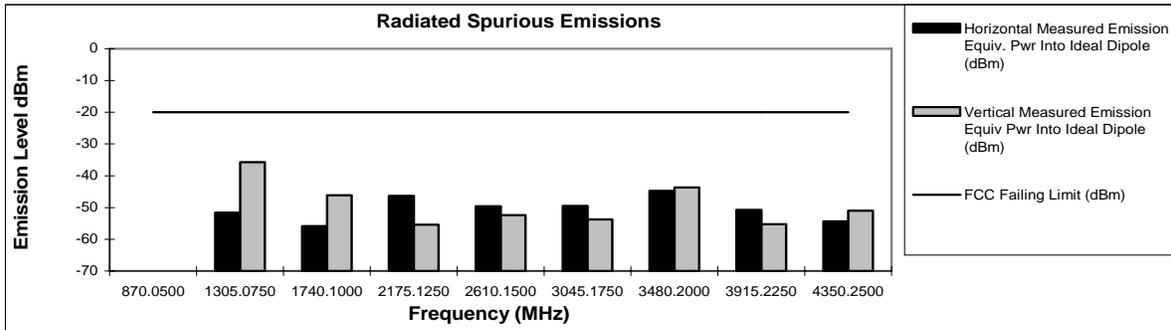


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 2 Watts

457.525 MHz

Channel Spacing 12.5kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
915.0500	-20	-44.37	-48.98
1372.5750	-20	-58.41	-47.49
1830.1000	-20	-56.20	-61.93
2287.6250	-20	-56.74	-57.55
2745.1500	-20	-51.07	-55.39
3202.6750	-20	-54.86	-56.60
3660.2000	-20	-44.54	-51.05
4117.7250	-20	-48.94	-53.32
4575.2500	-20	-55.78	*

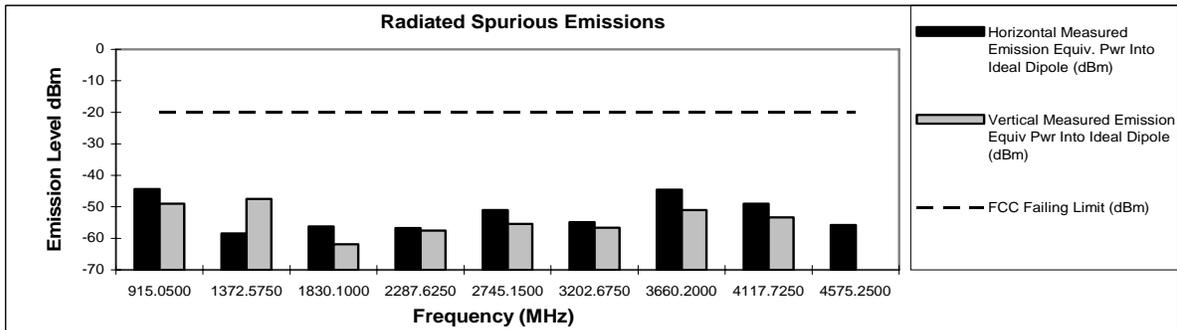

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West

August 6, 2008

FCC Registration: 91932 / Industry Canada: IC109U-1


Figure 6G-5: 2 Watt, 435.025 MHz, 12.5 kHz Channel Spacing & 2 Watt, 457.525 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A
Tx Power: 2 Watts

479.975 MHz

Channel Spacing 12.5kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
959.9500	-20	-49.27	-54.94
1439.9250	-20	-57.52	-49.90
1919.9000	-20	-49.31	-53.14
2399.8750	-20	-56.46	-54.65
2879.8500	-20	-52.29	-52.65
3359.8250	-20	-46.43	-45.21
3839.8000	-20	-51.81	-51.68
4319.7750	-20	-52.63	-51.94
4799.7500	-20	-53.64	*

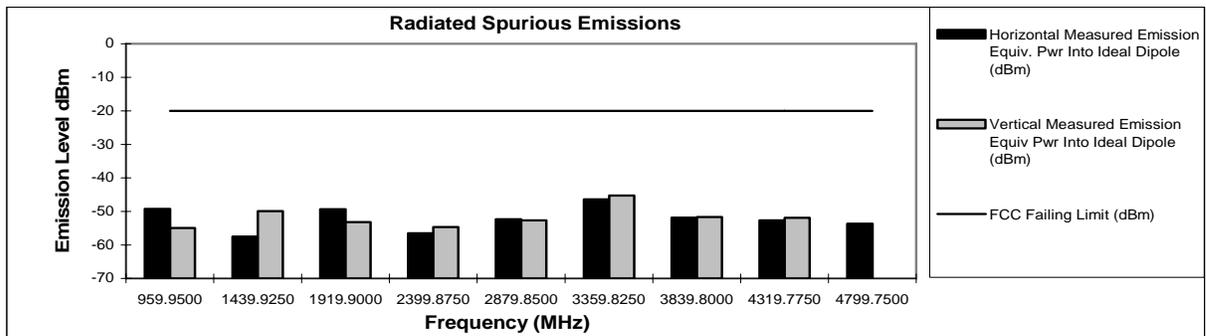

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West
 FCC Registration: 91932 / Industry Canada: IC109U-1

August 6, 2008

Figure 6G-6: 2 Watt, 479.975 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 2 Watts

435.025 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.0500	-13	*	*
1305.0750	-13	-55.56	-41.95
1740.1000	-13	-58.10	-58.39
2175.1250	-13	-57.46	-61.96
2610.1500	-13	-50.05	-53.81
3045.1750	-13	-50.67	-53.74
3480.2000	-13	-47.20	-46.21
3915.2250	-13	-54.60	-54.31
4350.2500	-13	-57.39	-52.72

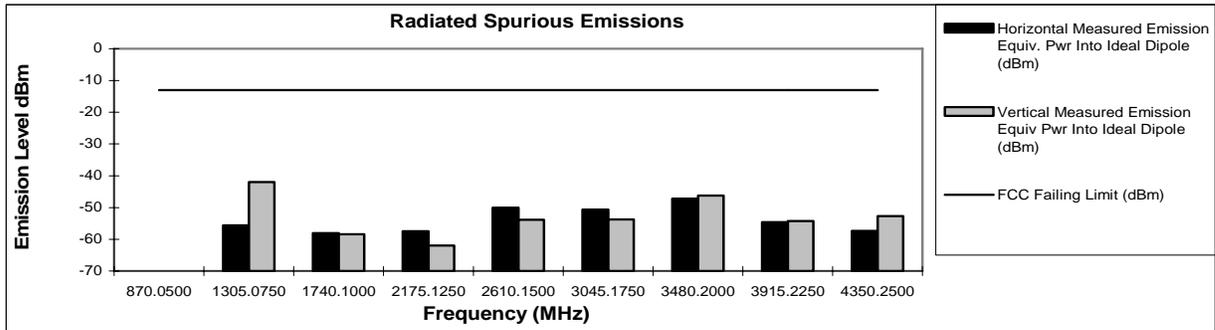


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 2 Watts

457.525 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
915.0500	-13	-43.88	-50.78
1372.5750	-13	-52.59	-39.07
1830.1000	-13	-56.41	-61.39
2287.6250	-13	-53.61	-49.12
2745.1500	-13	-52.87	-56.90
3202.6750	-13	-54.31	-56.23
3660.2000	-13	-45.45	-50.18
4117.7250	-13	-49.47	-53.43
4575.2500	-13	-56.61	*

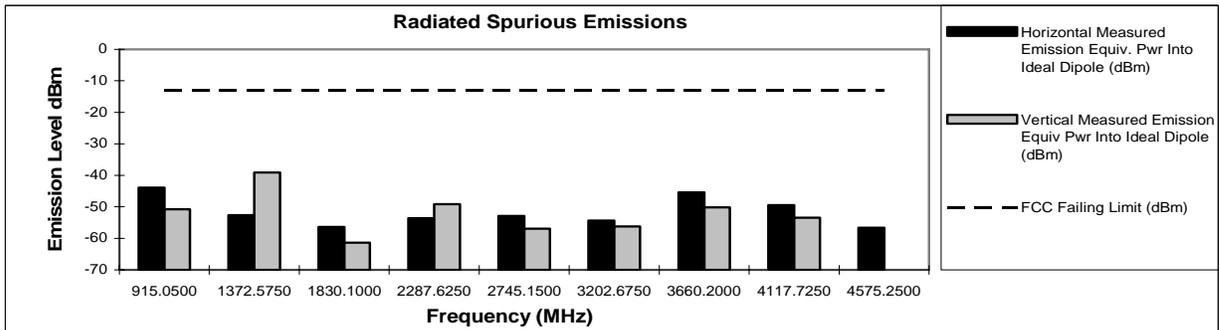

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West
 FCC Registration: 91932 / Industry Canada: IC109U-1

August 7, 2008

Figure 6G-7: 2 Watt, 435.025 MHz, 25 kHz Channel Spacing
 & 2 Watt, 457.525 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: Beacon-UHF-Bat-PMNN4081A

Tx Power: 2 Watts

479.975 MHz

Channel Spacing 25kHz | S/N 1338JN0196

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
959.9500	-13	-47.49	-32.97
1439.9250	-13	-57.43	-33.35
1919.9000	-13	-49.06	-53.48
2399.8750	-13	-57.10	-55.25
2879.8500	-13	-53.02	-52.38
3359.8250	-13	-47.29	-47.65
3839.8000	-13	-52.68	-52.35
4319.7750	-13	-53.10	-50.77
4799.7500	-13	-52.17	*

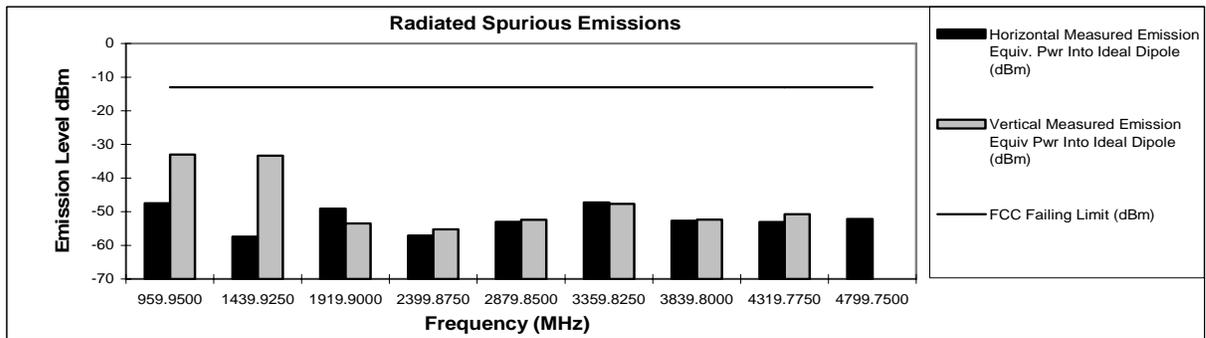

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Don West

August 7, 2008

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-8: 2 Watt, 479.975 MHz, 25 kHz Channel Spacing

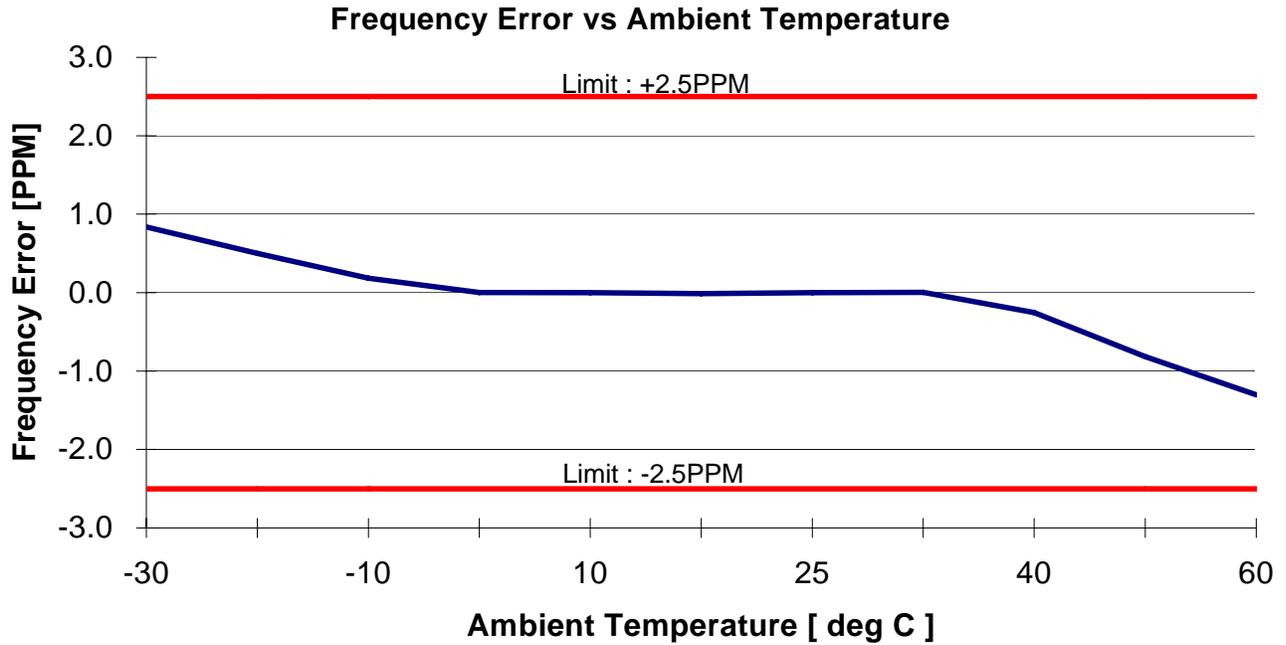


Figure 6H-1: Frequency Stability vs. Temperature

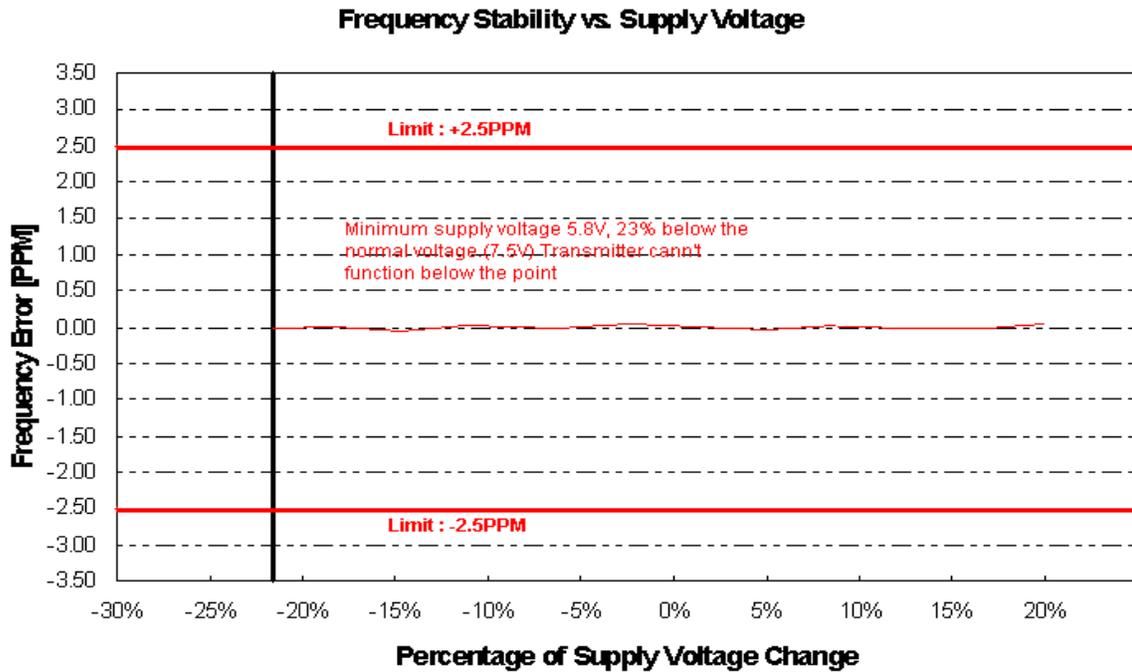


Figure 6H-2: Frequency Stability vs. Supply Voltage

EXHIBIT 6I

Transient Frequency Behavior – Pursuant to FCC Rules Part 90.214

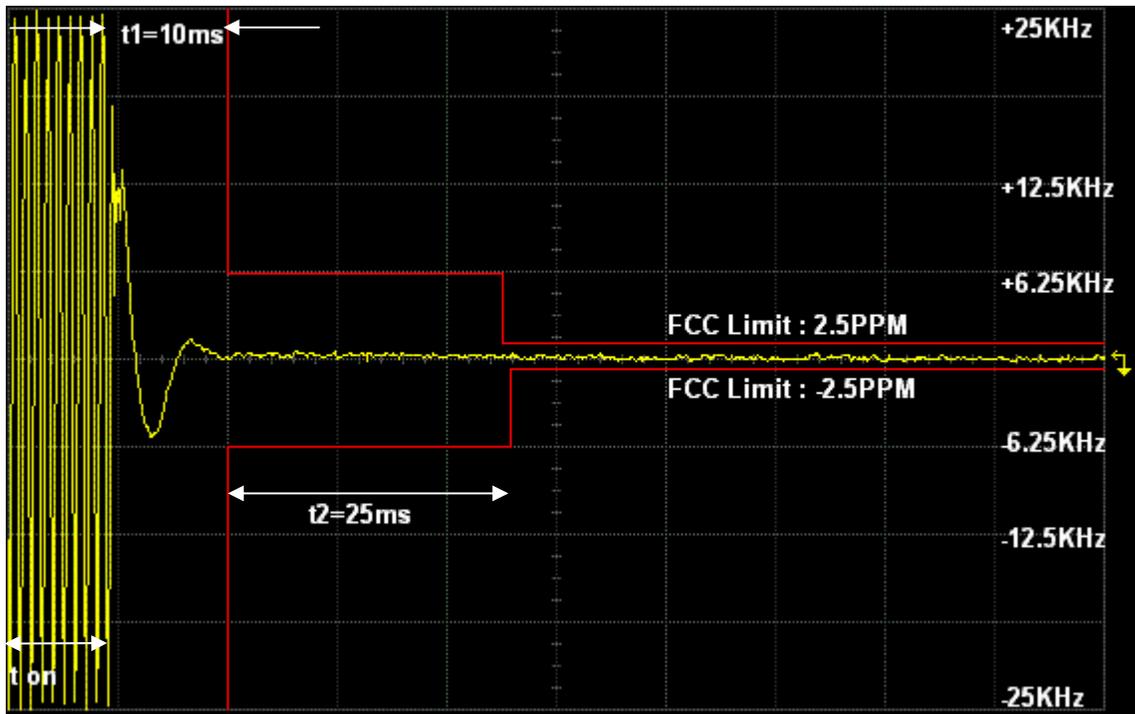


Figure 6I-1: 4 Watts, 12.5 kHz, 457.525 MHz, Key-Up Attack Time

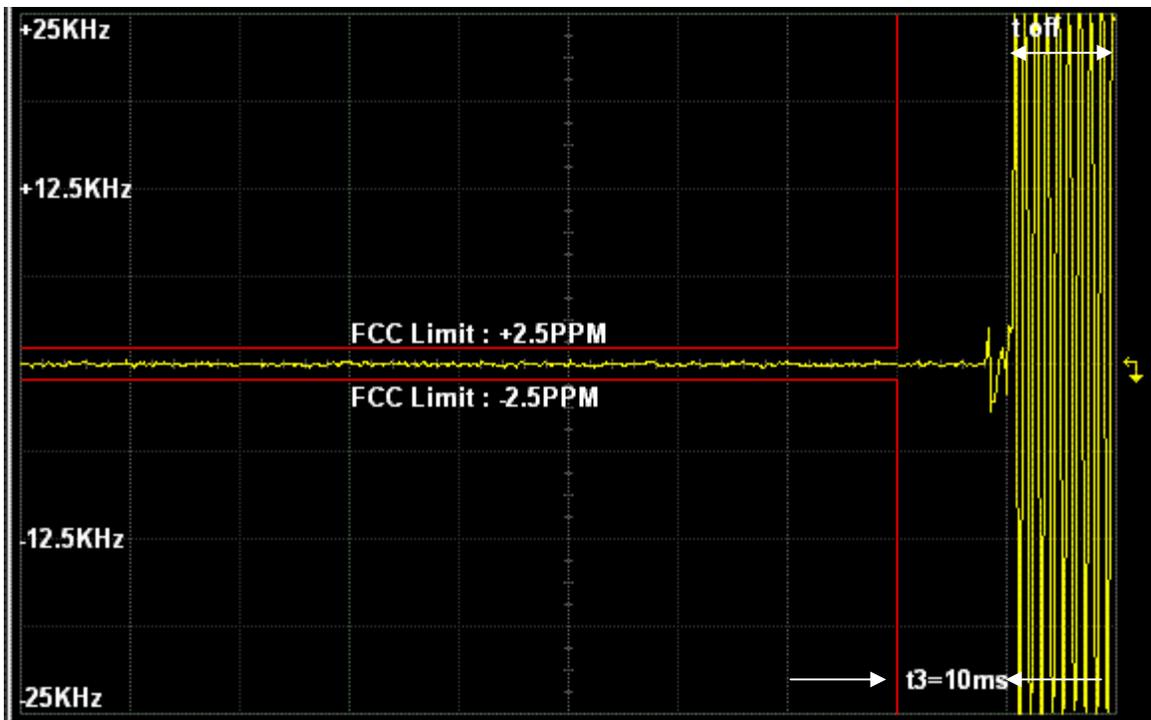


Figure 6I-2: 4 Watts, 12.5 kHz, 457.525 MHz, De-Key Decay Time

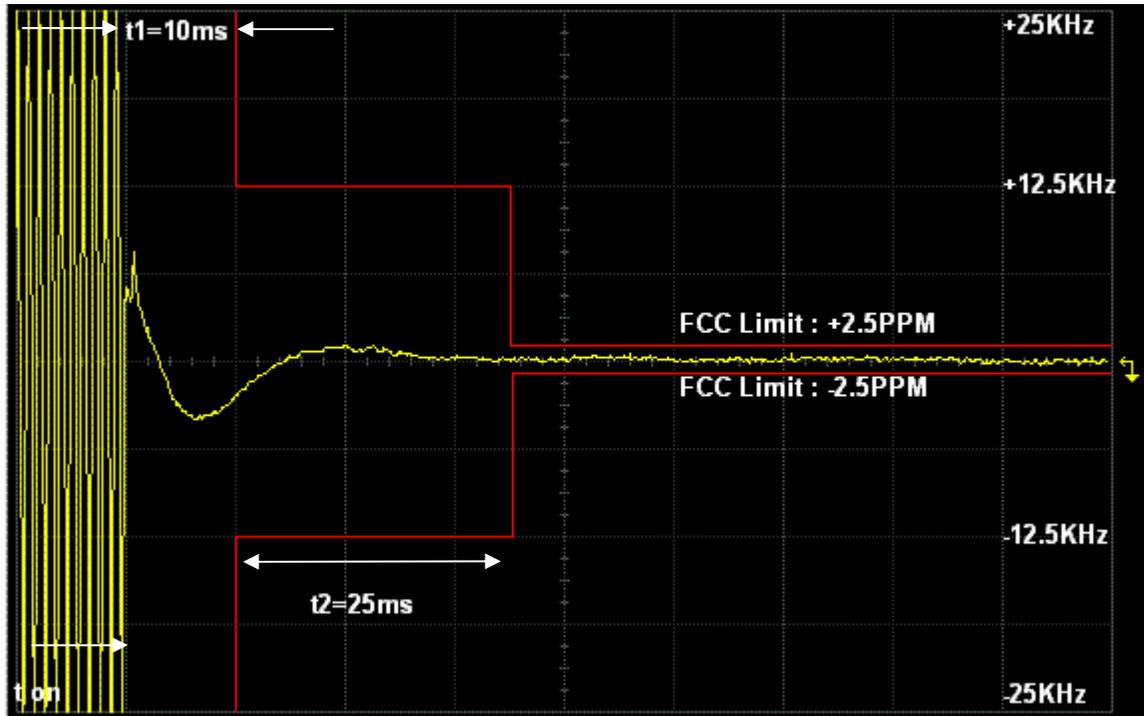


Figure 6I-3: 4 Watts, 25 kHz, 457.525 MHz, Key-Up Attack Time

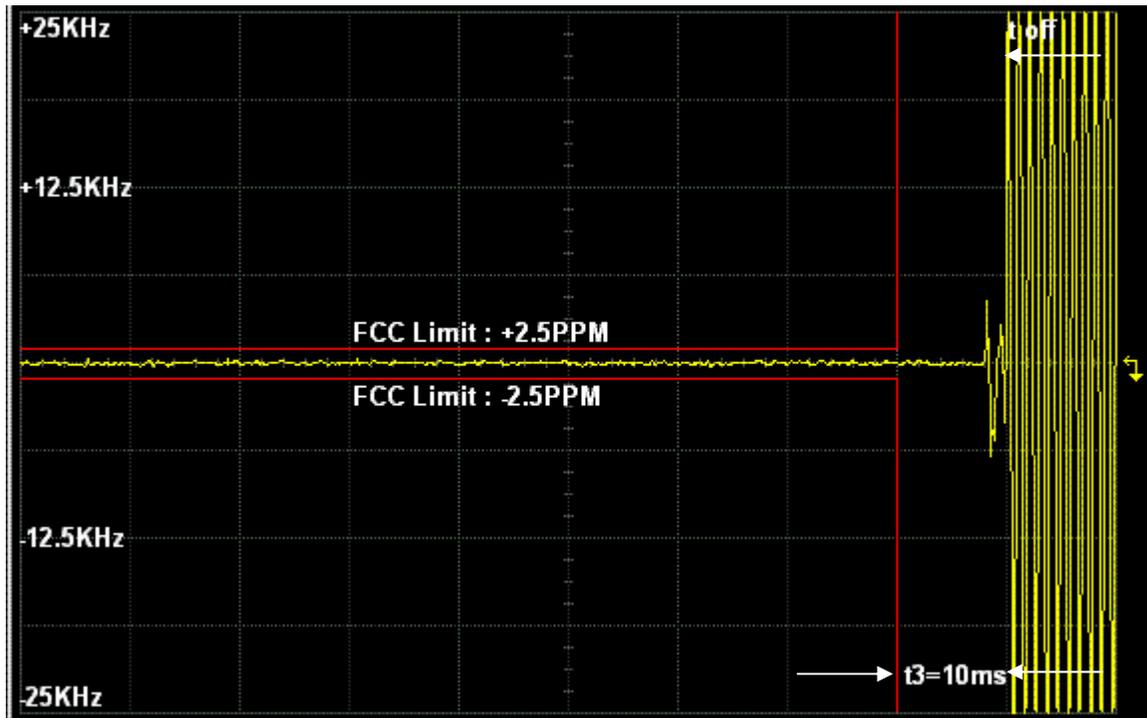


Figure 6I-4: 4 Watts, 25 kHz, 457.525 MHz, De-Key Decay Time

EXHIBIT 6J

Power Line Conducted Spurious Emissions - Pursuant to FCC Rules Part 15.107

EMI Conducted Scan latest FCC Peak det - 3810 LISN

Auto Merge Results N (Blue) L (Green)

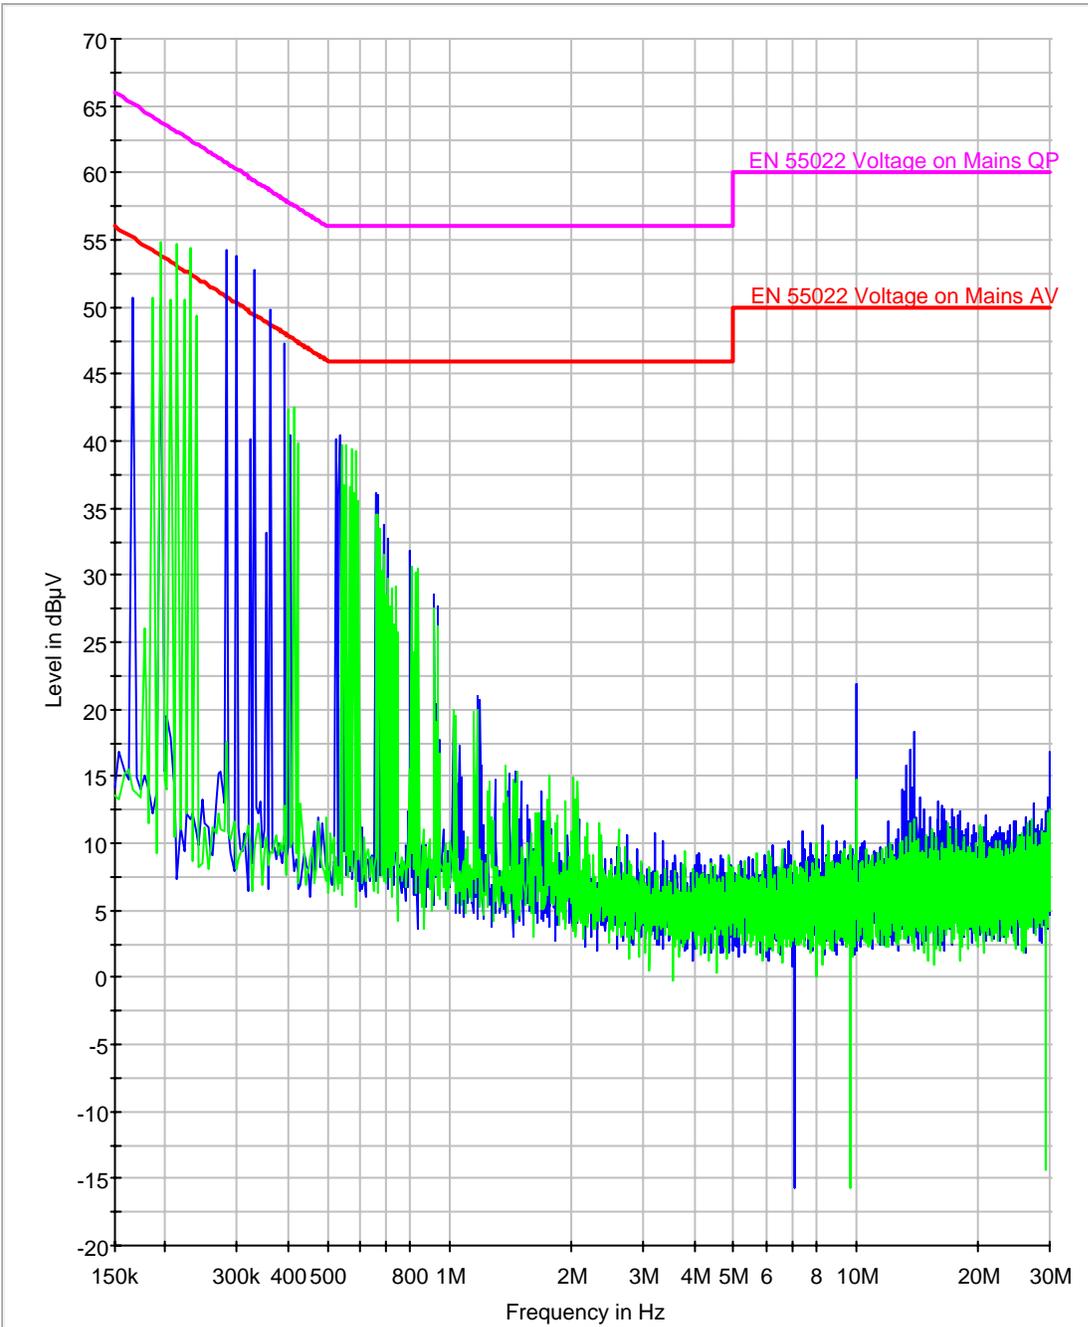


Figure 6J-1: Radio off Line/Neutral

Result Table_Single, Radio Off

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.194000	55.0	26.2	9000.000	GND	L1
0.214000	54.8	18.3	9000.000	GND	L1
0.230000	50.3	24.7	9000.000	GND	L1
0.282000	50.3	19.2	9000.000	GND	L1
0.298000	51.7	18.8	9000.000	GND	L1
0.330000	49.1	18.3	9000.000	GND	L1
0.194000	55.9	25.2	9000.000	GND	N
0.214000	55.8	25.7	9000.000	GND	N
0.230000	54.9	15.0	9000.000	GND	N
0.282000	51.6	23.1	9000.000	GND	N
0.298000	51.3	22.7	9000.000	GND	N
0.330000	47.3	17.1	9000.000	GND	N

Limits, Radio Off

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
194000	55.00	64.74	9.74	26.20	54.74	28.54	L1
214000	54.80	64.16	9.36	18.30	54.16	35.86	L1
230000	50.30	63.70	13.40	24.70	53.70	29.00	L1
282000	50.30	62.21	11.91	19.20	52.21	33.01	L1
298000	51.70	61.75	10.05	18.80	51.75	32.95	L1
330000	49.10	60.83	11.73	18.30	50.83	32.53	L1
194000	55.90	64.74	8.84	25.20	54.74	29.54	N
214000	55.80	64.16	8.36	25.70	54.16	28.46	N
230000	54.90	63.70	8.80	15.00	53.70	38.70	N
282000	51.60	62.21	10.61	23.10	52.21	29.11	N
298000	51.30	61.75	10.45	22.70	51.75	29.05	N
330000	47.30	60.83	13.53	17.10	50.83	33.73	N

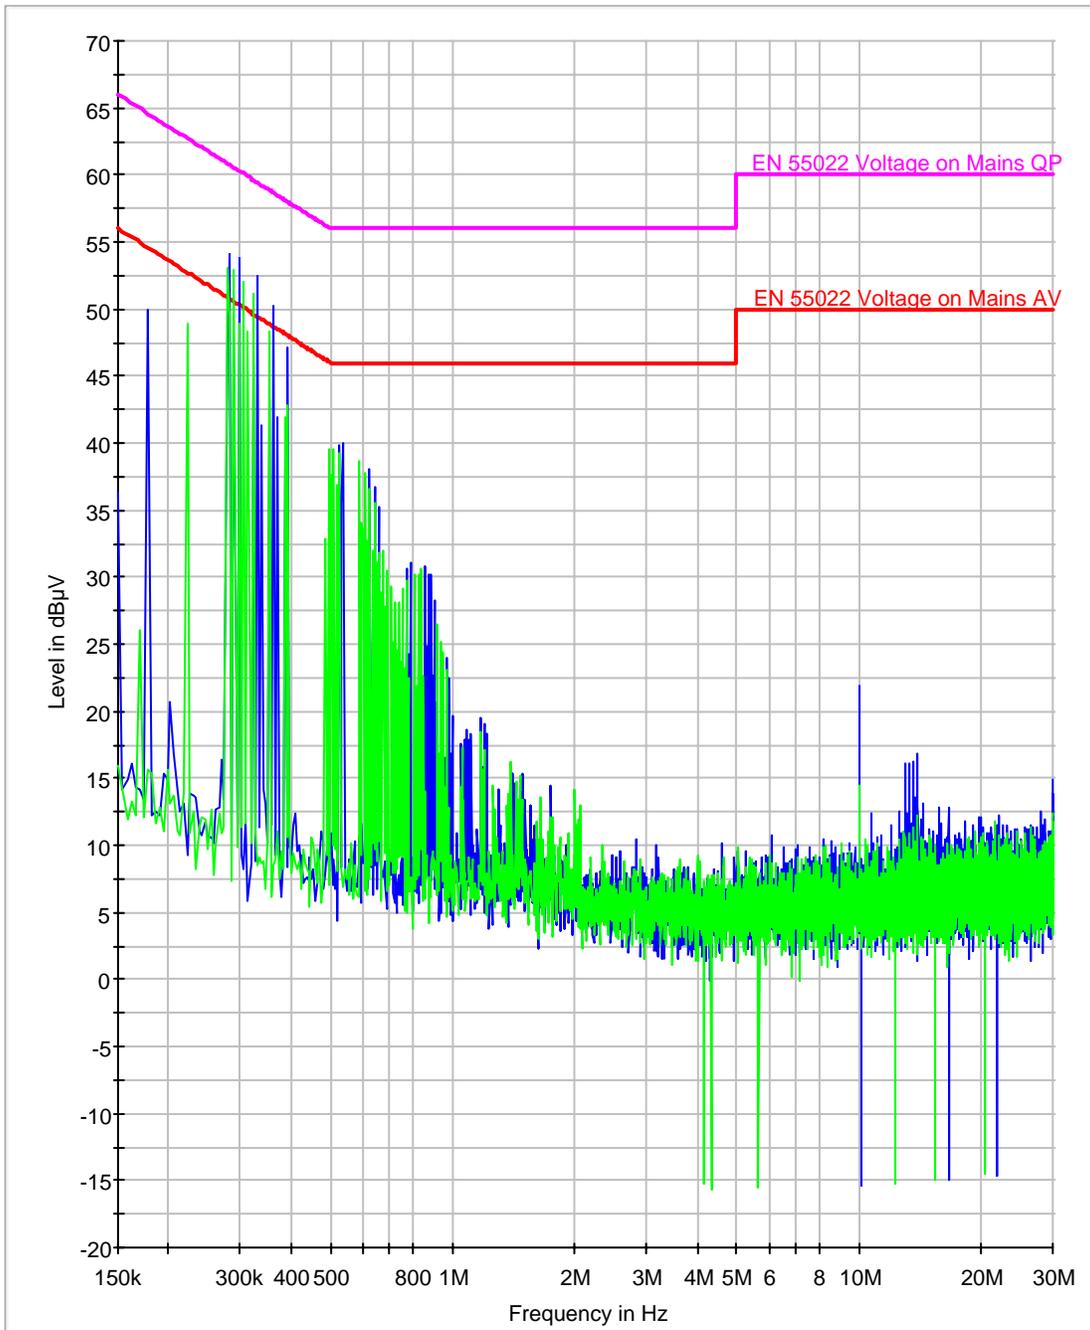


Figure 6J-2: Radio On, Rx Line/Neutral 435.025MHz

Result Table_Single RX 435.025MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.278000	51.4	20.1	9000.000	GND	L1
0.282000	51.6	19.6	9000.000	GND	L1
0.298000	51.7	24.0	9000.000	GND	L1
0.306000	50.2	18.8	9000.000	GND	L1
0.322000	49.2	18.7	9000.000	GND	L1
0.330000	47.9	17.3	9000.000	GND	L1
0.278000	51.9	23.5	9000.000	GND	N
0.282000	51.8	23.1	9000.000	GND	N
0.298000	51.3	22.6	9000.000	GND	N
0.306000	49.9	18.7	9000.000	GND	N
0.322000	47.6	17.3	9000.000	GND	N
0.330000	46.0	16.8	9000.000	GND	N

Limits RX 435.025MHz

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
278000	51.40	62.32	10.92	20.10	52.32	32.22	L1
282000	51.60	62.21	10.61	19.60	52.21	32.61	L1
298000	51.70	61.75	10.05	24.00	51.75	27.75	L1
306000	50.20	61.52	11.32	18.80	51.52	32.72	L1
322000	49.20	61.06	11.86	18.70	51.06	32.36	L1
330000	47.90	60.83	12.93	17.30	50.83	33.53	L1
278000	51.90	62.32	10.42	23.50	52.32	28.82	N
282000	51.80	62.21	10.41	23.10	52.21	29.11	N
298000	51.30	61.75	10.45	22.60	51.75	29.15	N
306000	49.90	61.52	11.62	18.70	51.52	32.82	N
322000	47.60	61.06	13.46	17.30	51.06	33.76	N
330000	46.00	60.83	14.83	16.80	50.83	34.03	N

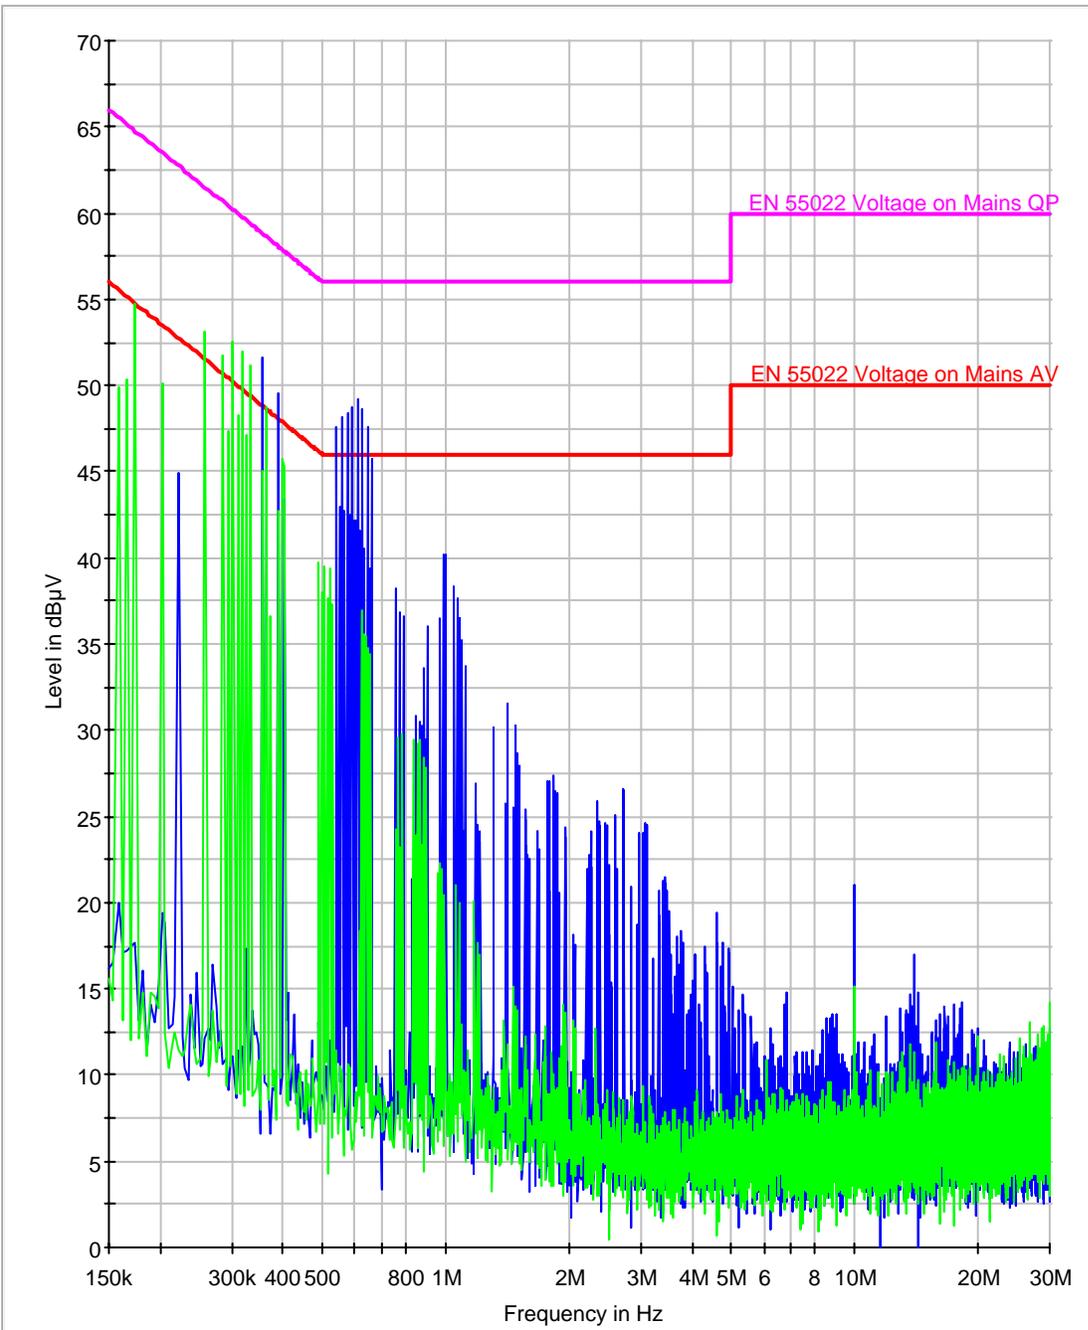


Figure 6J-3: Radio On, Rx Line/Neutral 457.525MHz

Result Table_Single RX 457.525MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.258000	51.7	23.0	9000.000	GND	L1
0.302000	50.2	19.0	9000.000	GND	L1
0.318000	49.5	18.5	9000.000	GND	L1
0.358000	44.1	14.2	9000.000	GND	L1
0.390000	47.6	17.2	9000.000	GND	L1
0.610000	40.5	10.4	9000.000	GND	L1
0.258000	52.8	23.1	9000.000	GND	N
0.302000	50.0	19.3	9000.000	GND	N
0.318000	48.5	17.6	9000.000	GND	N
0.358000	45.5	14.6	9000.000	GND	N
0.390000	47.5	17.1	9000.000	GND	N
0.610000	34.0	7.4	9000.000	GND	N

Limits RX 457.525MHz

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
258000	51.70	62.90	11.20	23.00	52.90	29.90	L1
302000	50.20	61.63	11.43	19.00	51.63	32.63	L1
318000	49.50	61.17	11.67	18.50	51.17	32.67	L1
358000	44.10	60.02	15.92	14.20	50.02	35.82	L1
390000	47.60	59.10	11.50	17.20	49.10	31.90	L1
258000	52.80	62.90	10.10	23.10	52.90	29.80	N
302000	50.00	61.63	11.63	19.30	51.63	32.33	N
318000	48.50	61.17	12.67	17.60	51.17	33.57	N
358000	45.50	60.02	14.52	14.60	50.02	35.42	N
390000	47.50	59.10	11.60	17.10	49.10	32.00	N
500kHz - 5MHz							
610000	40.50	56.00	15.50	10.40	46.00	35.60	L1
610000	34.00	56.00	22.00	7.40	46.00	38.60	N

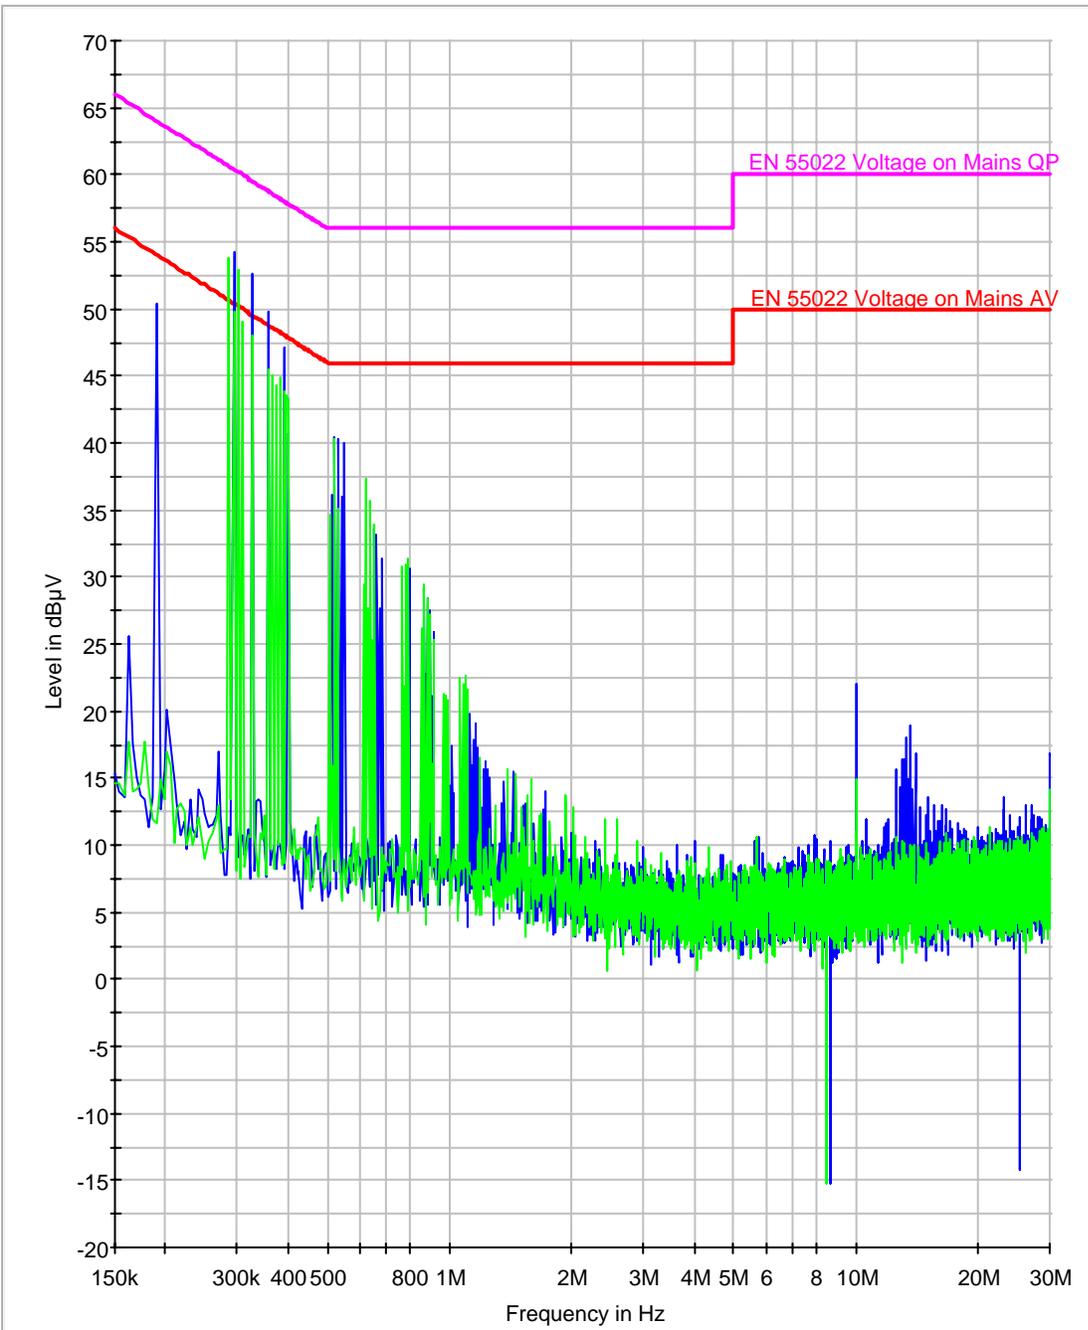


Figure 6J-4: Radio On, Rx Line/Neutral 479.975MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.190000	55.1	27.1	9000.000	GND	L1
0.286000	50.4	19.1	9000.000	GND	L1
0.294000	50.5	18.4	9000.000	GND	L1
0.302000	50.1	19.6	9000.000	GND	L1
0.326000	48.5	18.6	9000.000	GND	L1
0.358000	44.1	14.4	9000.000	GND	L1
0.190000	56.1	18.7	9000.000	GND	N
0.286000	51.5	22.7	9000.000	GND	N
0.294000	50.3	22.9	9000.000	GND	N
0.302000	50.0	19.0	9000.000	GND	N
0.326000	47.2	18.1	9000.000	GND	N
0.358000	45.7	15.0	9000.000	GND	N

Limits RX 479.975MHz

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
190000	55.10	64.85	9.75	27.10	54.85	27.75	L1
286000	50.40	62.09	11.69	19.10	52.09	32.99	L1
294000	50.50	61.86	11.36	18.40	51.86	33.46	L1
302000	50.10	61.63	11.53	19.60	51.63	32.03	L1
326000	48.50	60.94	12.44	18.60	50.94	32.34	L1
358000	44.10	60.02	15.92	14.40	50.02	35.62	L1
190000	56.10	64.85	8.75	18.70	54.85	36.15	N
286000	51.50	62.09	10.59	22.70	52.09	29.39	N
294000	50.30	61.86	11.56	22.90	51.86	28.96	N
302000	50.00	61.63	11.63	19.00	51.63	32.63	N
326000	47.20	60.94	13.74	18.10	50.94	32.84	N
358000	45.70	60.02	14.32	15.00	50.02	35.02	N

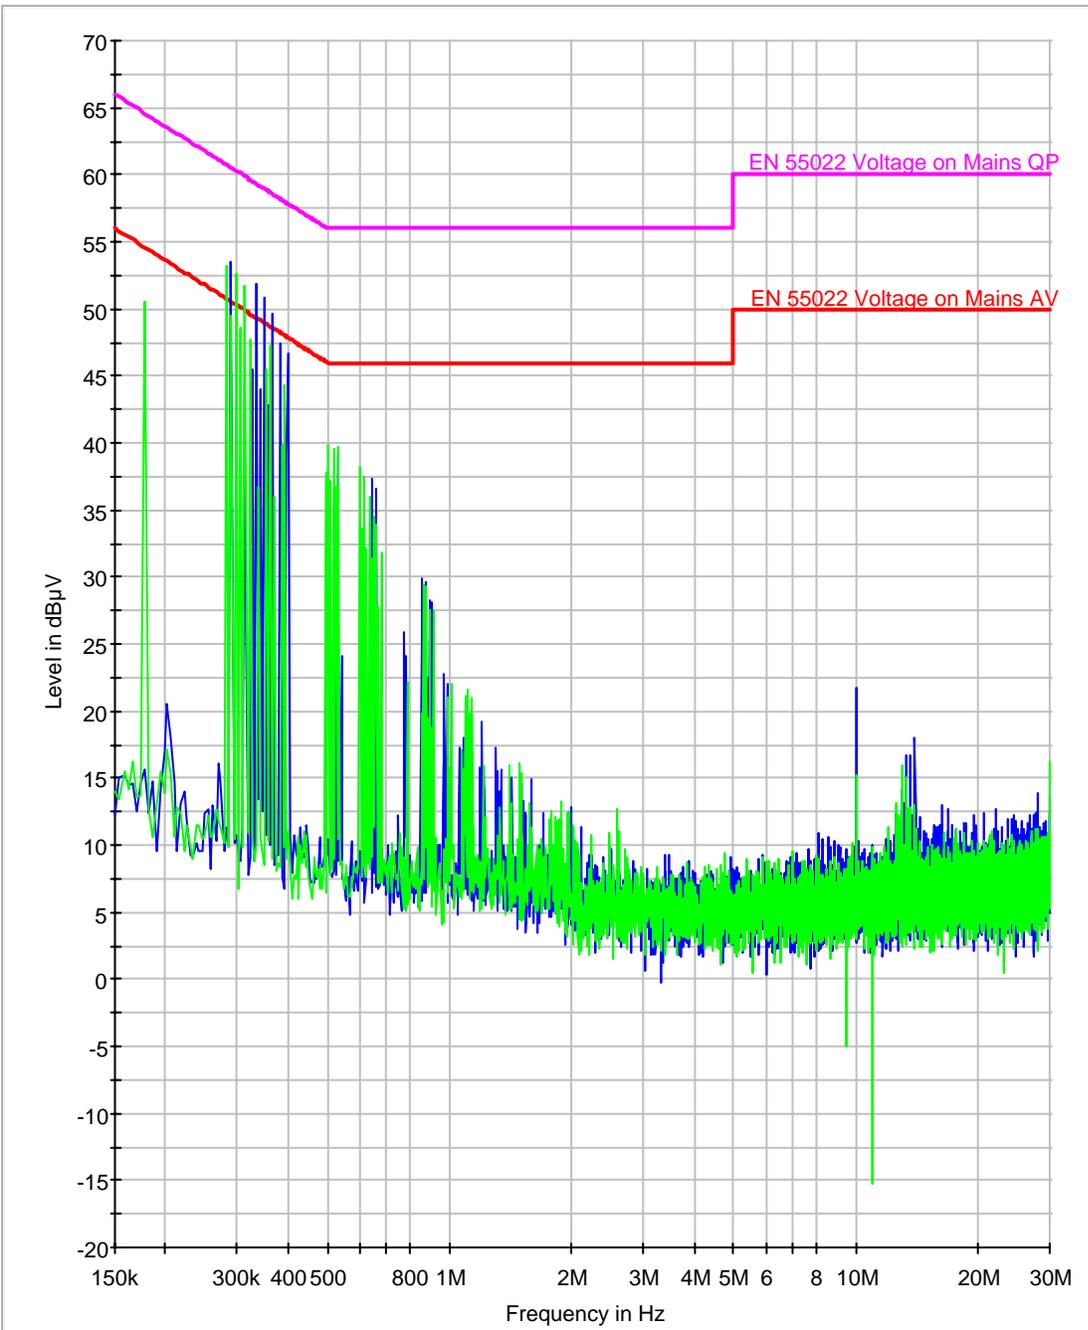


Figure 6J-5: Radio on Tx Line/Neutral 435.025MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.282000	46.7	16.0	9000.000	GND	L1
0.290000	46.5	15.8	9000.000	GND	L1
0.298000	46.2	15.9	9000.000	GND	L1
0.314000	45.3	14.5	9000.000	GND	L1
0.334000	43.7	14.2	9000.000	GND	L1
0.350000	42.3	12.6	9000.000	GND	L1
0.282000	45.9	15.7	9000.000	GND	N
0.290000	45.6	15.3	9000.000	GND	N
0.298000	45.4	15.4	9000.000	GND	N
0.314000	44.6	14.7	9000.000	GND	N
0.334000	43.3	13.9	9000.000	GND	N
0.350000	41.9	12.9	9000.000	GND	N

Limits TX 435.025MHz

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
282000	46.70	62.21	15.51	16.00	52.21	36.21	L1
290000	46.50	61.98	15.48	15.80	51.98	36.18	L1
298000	46.20	61.75	15.55	15.90	51.75	35.85	L1
314000	45.30	61.29	15.99	14.50	51.29	36.79	L1
334000	43.70	60.71	17.01	14.20	50.71	36.51	L1
350000	42.30	60.25	17.95	12.60	50.25	37.65	L1
282000	45.90	62.21	16.31	15.70	52.21	36.51	N
290000	45.60	61.98	16.38	15.30	51.98	36.68	N
298000	45.40	61.75	16.35	15.40	51.75	36.35	N
314000	44.60	61.29	16.69	14.70	51.29	36.59	N
334000	43.30	60.71	17.41	13.90	50.71	36.81	N
350000	41.90	60.25	18.35	12.90	50.25	37.35	N

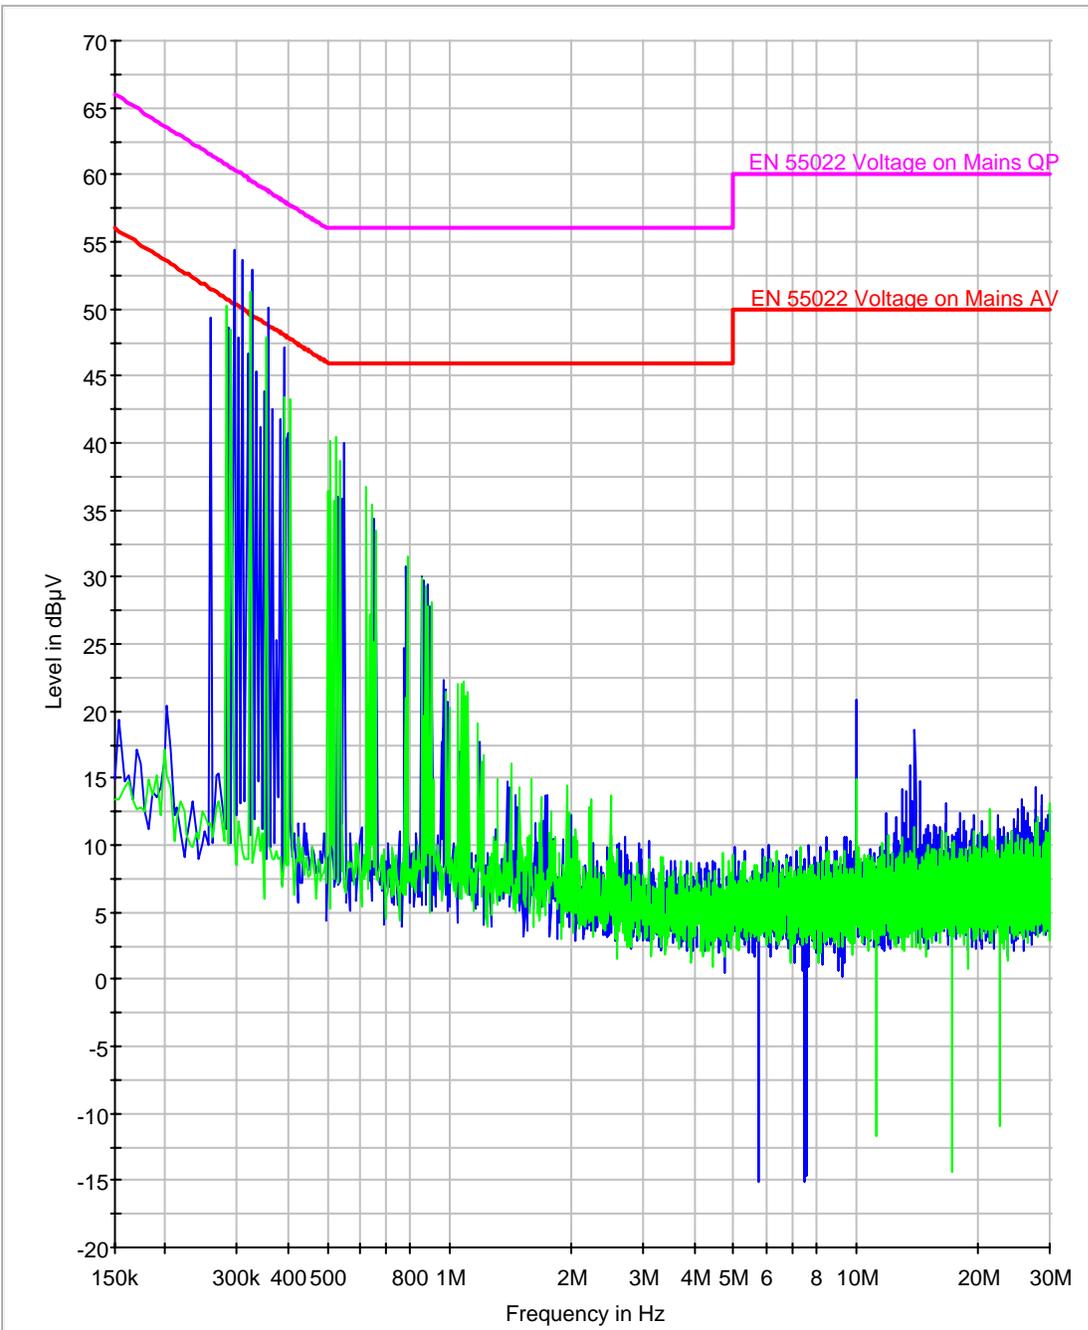


Figure 6J-6: Radio on Tx Line/Neutral 457.525MHz

Result Table_Single TX 457.525MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.282000	49.2	17.6	9000.000	GND	L1
0.294000	49.8	19.0	9000.000	GND	L1
0.310000	49.9	18.3	9000.000	GND	L1
0.322000	49.6	17.6	9000.000	GND	L1
0.326000	49.5	18.5	9000.000	GND	L1
0.358000	44.9	15.1	9000.000	GND	L1
0.282000	50.9	22.8	9000.000	GND	N
0.294000	49.7	22.5	9000.000	GND	N
0.310000	49.6	19.0	9000.000	GND	N
0.322000	48.8	17.7	9000.000	GND	N
0.326000	48.4	18.7	9000.000	GND	N
0.358000	45.1	14.4	9000.000	GND	N

Limits TX 457.525MHz

Frequency	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
<= 500kHz							
282000	49.20	62.21	13.01	17.60	52.21	34.61	L1
294000	49.80	61.86	12.06	19.00	51.86	32.86	L1
310000	49.90	61.40	11.50	18.30	51.40	33.10	L1
322000	49.60	61.06	11.46	17.60	51.06	33.46	L1
326000	49.50	60.94	11.44	18.50	50.94	32.44	L1
358000	44.90	60.02	15.12	15.10	50.02	34.92	L1
282000	50.90	62.21	11.31	22.80	52.21	29.41	N
294000	49.70	61.86	12.16	22.50	51.86	29.36	N
310000	49.60	61.40	11.80	19.00	51.40	32.40	N
322000	48.80	61.06	12.26	17.70	51.06	33.36	N
326000	48.40	60.94	12.54	18.70	50.94	32.24	N
358000	45.10	60.02	14.92	14.40	50.02	35.62	N

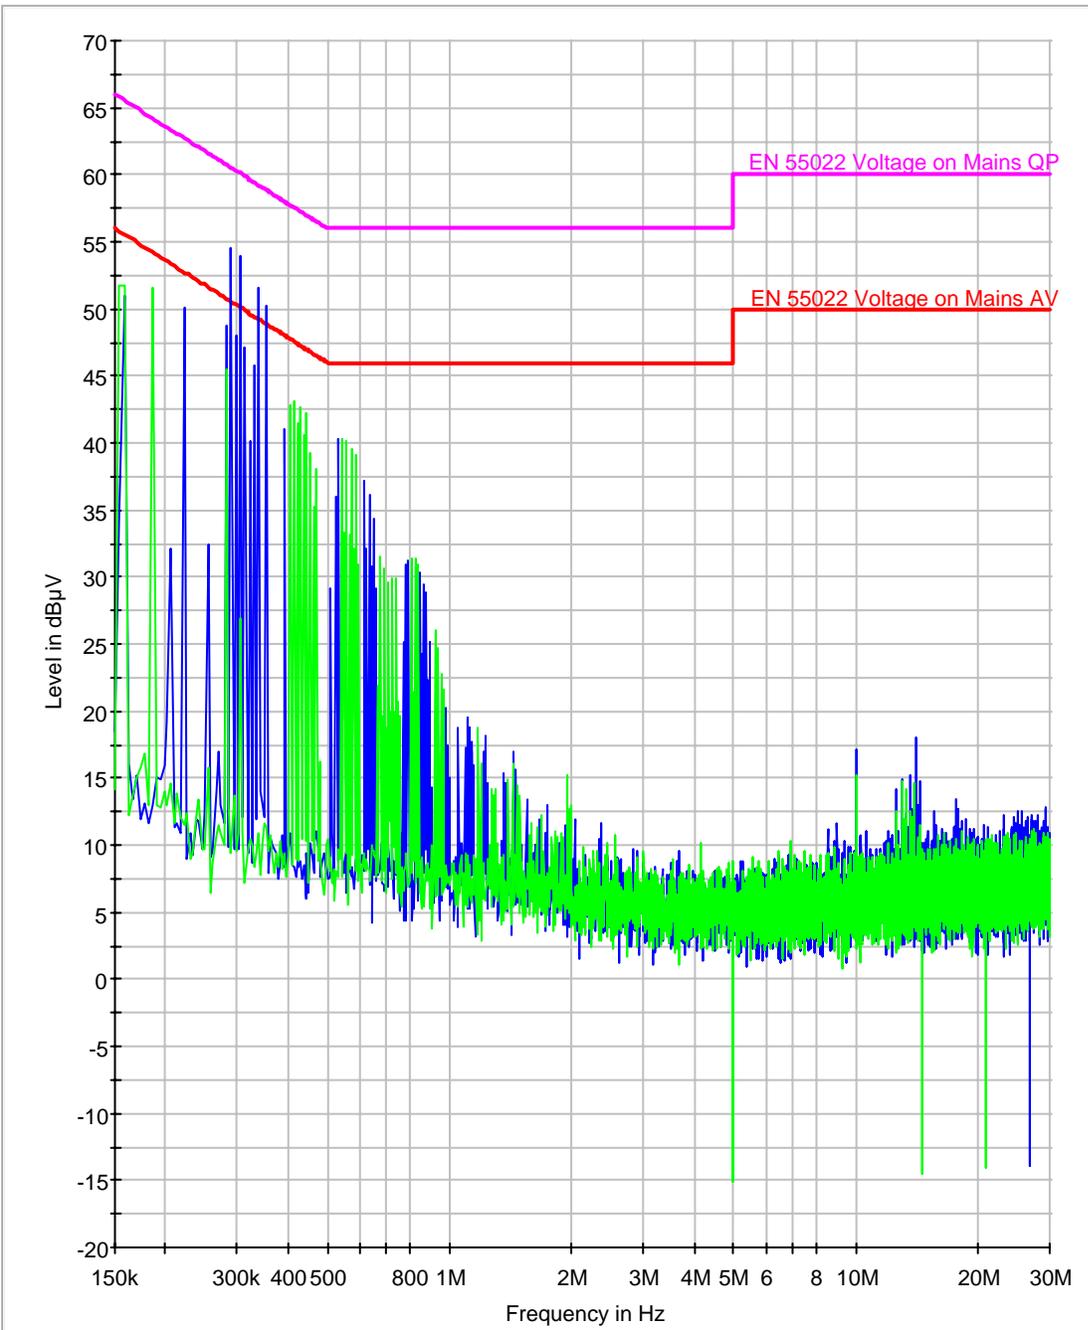


Figure 6J-7: Radio on Tx Line/Neutral 479.975MHz

Result Table Single TX 479.975MHz

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.154000	59.3	33.9	9000.000	GND	L1
0.186000	55.4	26.7	9000.000	GND	L1
0.290000	49.5	19.1	9000.000	GND	L1
0.306000	49.9	18.7	9000.000	GND	L1
0.338000	48.7	18.2	9000.000	GND	L1
0.354000	45.7	15.1	9000.000	GND	L1
0.154000	59.0	30.1	9000.000	GND	N
0.186000	55.8	26.6	9000.000	GND	N
0.290000	50.6	17.4	9000.000	GND	N
0.306000	49.7	18.9	9000.000	GND	N
0.338000	47.2	16.8	9000.000	GND	N
0.354000	45.5	15.6	9000.000	GND	N

Limits TX 479.975MHz

Frequency	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
<= 500kHz							
154000	59.30	65.89	6.59	33.90	55.89	21.99	L1
186000	55.40	64.97	9.57	26.70	54.97	28.27	L1
290000	49.50	61.98	12.48	19.10	51.98	32.88	L1
306000	49.90	61.52	11.62	18.70	51.52	32.82	L1
338000	48.70	60.60	11.90	18.20	50.60	32.40	L1
354000	45.70	60.14	14.44	15.10	50.14	35.04	L1
154000	59.00	65.89	6.89	30.10	55.89	25.79	N
186000	55.80	64.97	9.17	26.60	54.97	28.37	N
290000	50.60	61.98	11.38	17.40	51.98	34.58	N
306000	49.70	61.52	11.82	18.90	51.52	32.62	N
338000	47.20	60.60	13.40	16.80	50.60	33.80	N
354000	45.50	60.14	14.64	15.60	50.14	34.54	N