



MOTOROLA



CGISS EME Test Laboratory

8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322

S.A.R. EME Compliance Test Report
Part 1 of 2

Date of Report: May 2, 2003
Report Revision: Rev. A
Manufacturer: Motorola
Product Description: 1:6, 2:6, 81:120 TDM; 64 QAM, 16
QAM & QPSK Modulation; 0.6 W
Pulse average
FCC ID: **AZ489FT5822**
Device Model: H62XAH6RR1AN

Test Period: 3/28/03-4/10/03
EME Tech: Clint Miller
EME Eng.: Stephen Whalen (Sr. EME Eng.)
Author: Michael Sailsman
Global EME Regulatory Affairs Liaison

Note: Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report.

Signature on File

Ken Enger
Senior Resource Manager, Laboratory Director, CGISS EME Lab

5/2/03

Date Approved

Note: This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

TABLE OF CONTENTS

1.0	Introduction
2.0	Reference Standards and Guidelines
3.0	Description of Test Sample
3.1	Test Signal
3.2	Test Output Power
4.0	Description of Test Equipment
4.1	Description of S.A.R Measurement System
4.2	Description of Phantom
4.2.1	Flat Phantom
4.2.2	SAM phantom
4.3	Simulated Tissue Properties
4.3.1	Type of Simulated Tissue
4.3.2	Simulated Tissue Composition
4.4	Test condition
5.0	Description of Test Procedure
5.1	Device Test Positions
5.1.1	Abdomen
5.1.2	Head
5.1.3	Face
5.2	Test Position Photographs
5.3	Probe Scan Procedures
6.0	Measurement Uncertainty
7.0	S.A.R. Test Results
7.1	S.A.R. results
7.2	Peak S.A.R. location
7.3	Highest S.A.R. results calculation methodology
8.0	Conclusion
	Appendix A: Power Slump Data/Shortened scan
	Appendix B: Data Results
	Appendix C: Dipole System Performance Check Results
	Appendix D: Calibration Certificates
	Appendix E: Illustration of Body-worn Accessories
	Appendix F: Accessories and options test status and separation distances

REVISION HISTORY

Date	Revision	Comments
4/16/03	O	Prototype results
5/2/03	A	Incorrect antenna gain corrected in section 3.0

1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (S.A.R.) measurements performed at the CGISS EME Test Lab for model number H62XAH6RR1AN, FCC ID: AZ489FT5822.

The applicable exposure environment is General Population/Uncontrolled.

The test results included herein represent the highest S.A.R. levels applicable to this product and clearly demonstrate compliance with FCC General Population/Uncontrolled RF Exposure limits of 1.6 mW/g per the requirements of 47 CFR 2.1093(d).

2.0 Reference Standards and Guidelines

This product is designed to comply with the following national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; 47CFR part 2 sub-part J
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-1999 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Terminal frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Terminal communications (Electromagnetic Radiation - Human Exposure) Standard 2001
- ANATEL, Brazil Regulatory Authority, Resolution 256 (April 11, 2001) "additional requirements for SMR, cellular and PCS product certification."

3.0 Description of Test Sample



FCC ID: AZ489FT5822 is a digital multi-service data capable device that employs time division multiplexing transmission technology with a duty cycle ranging from 16.67% to 33.33% using 16-QAM modulation for voice or circuit data transmission. There is a Split 3:1 mode that operates using a 16.67% transmission duty cycle. Two 7.5ms pulses occurs during the six time slots within the 90-msec frame format. This mode is available in both the 806-825MHz and 896-902MHz bands in the telephone interconnect mode only. Packet data transmission is also supported up to a maximum duty cycle of 67.5% using quad QPSK modulation.

This device will be marketed to and used by the general population. This device may be used while held against the head in voice mode, in front of the face in PTT mode, and against the body in both voice and data modes.

FCC ID: AZ489FT5822 is capable of operating in the 806-825 MHz and 896-902MHz bands. Packet data transmission is not available while transmitting in the 896-902 MHz band. The rated power is 0.6 watts pulsed averaged. The maximum output is 0.7 watts pulsed average as defined by the upper limit of the production line final test station.

FCC ID: AZ489FT5822 is offered with the following options and accessories:

Antenna

8585924E01	Retractable whip ¼ wave antenna; 806-941 MHz; -0.04dBd (extended) to -0.26 dBd (retracted)
------------	---

Batteries

SNN5705B	750 mAh Lithium Ion
SNN5704A	600 mAh Lithium Ion
SNN5706A	1050 mAh Lithium Ion
NNTN4655A	1450 mAh Lithium Ion

Body-worn Accessories

NNTN4681A	Holster
-----------	---------

Applicable attachments

NTN8496A	Light-weight headset w/ mic
SYN7875C	Hearing Aid Neck loop (incl. SYN8608C, SNN5536A battery)
SYN8390B	Privacy Earpiece and Microphone
NNTN4033A	Privacy earpiece and Mic w/ PTT
NSN6066A	Remote speaker w/PTT
NNTN4877A	Mini Keyboard
SYN8146C	Lightweight Over the Ear headset w/ boom microphone
NTN8513B	Lightweight headband
NNTN4620A	Silver Ear Bud
NKN6544B	RS232 Data cable
NKN6540A	Dual Port Adaptor cable
NNTN4007A	USB Data cable
NNTN4049A	USB Data cable
NNTN4879A	Back Bezel (High Performance batteries)
NNTN4880A	Back Bezel (Maximum Capacity batteries)

3.1 Test Signal

Test Signal mode:

Test Mode	☒	Base Station	☐	Simulator	☐
-----------	-------------------------------------	--------------	--------------------------	-----------	--------------------------

Transmission Mode:

CW	
Native Transmission	X
TDMA: 1:6, 1:3, 81:120	X
Other:	

3.2 Test Output Power

A table of the characteristic power slump versus time is provided in Appendix A for all tested batteries.

4.0 Description of Test Equipment**4.1 Descriptions of S.A.R. Measurement System**

The laboratory utilizes a Dosimetric Assessment System (DASY3™) S.A.R. measurement system manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot with an ET3DV6 E-Field probe. Please reference the following websites for detailed specifications of the robot and E-Field probe: http://www.speag.com/robot_acc.html, <http://www.speag.com/probes.html>.

The S.A.R. measurements were conducted with probe model/serial number ET3DV6/SN1545. The system performance check was conducted daily and within 24 hours prior to testing. DASY output files of the system performance test results and the probe/dipole calibration certificates are included in appendices C and D respectively. The table below summarizes the system performance check results normalized to 1W.

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	System Perf. Result when normalized to 1W (mW/g)	Reference S.A.R @ 1W (mW/g)	Test Date(s)
1545	FCC Body	5/21/02	D835V2/426	10.575 +/- 0.075	10.65 +/- 10%	4/3/03-4/10/03 6 test days
1545	IEEE Head	5/21/02	D835V2/426	10.125 +/- 0.295	10.04 +/- 10%	3/28/03-4/3/03 6 test days

The DASY3™ system is operated per the instructions in the DASY3™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME S.A.R. compliance was calibrated according to 17025 A2LA guidelines.

4.2 Description of Phantom

4.2.1 Flat Phantom

A rectangular shaped box made of low loss acrylic material. The phantom is mounted on a wooden supporting structure that has a loss tangent of < 0.05 . The structure has a 60.96 cm x 15.24 cm opening at its center to allow positioning the DUT to the phantom's surface. The flat phantom dimensions used for S.A.R. performance assessment are L = 40cm, W = 23cm, H = 20cm, Surface Thickness = 0.2cm.

4.2.2 SAM Phantom

A SAM TP1234 phantom supplied by SPEAG was used to assess S.A.R. performance at the head.

4.3 Simulated Tissue Properties

4.3.1 Type of Simulated Tissue

The simulated tissue used is compliant to that specified in FCC Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

Simulated Tissue	Body Position
FCC Body	Abdomen
IEEE Head	Head/Face

4.3.2 Simulated Tissue Composition

	Tissue Ingredients (%)					
	835MHz		NA		NA	
	Head	Body	Head	Body	Head	Body
Sugar	57	44.9	NA	NA	NA	NA
DGBE (Glycol)	NA	NA	NA	NA	NA	NA
De ionized -Water	40.45	53.06	NA	NA	NA	NA
Salt	1.45	0.94	NA	NA	NA	NA
HEC	1	1	NA	NA	NA	NA
Bact.	0.1	0.1	NA	NA	NA	NA

Characterization of Simulated tissue materials and ambient conditions:

Simulated tissue prepared for S.A.R. measurements is measured daily and within 24 hours prior to actual S.A.R. testing to verify that the tissue is within 5% of target parameters at the center of the transmit band. This measurement is done using the Agilent (HP) probe kit model 85070C and a HP8753D Network Analyzer.

Target tissue parameters

FCC Body				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
835	55.2	52.8-54.3	0.97	0.97-0.98
813	55.3	53.0-54.5	0.97	0.95-0.96
899	55.0	52.1-53.7	1.05	1.04-1.05

IEEE Head				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
835	41.5	42.5-43.0	0.90	0.93-0.95
813	41.6	43.0-43.24	0.90	0.91-0.92
899	41.5	41.98-42.2	0.97	0.99-1.01

4.4 Test conditions

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within $\pm 2^{\circ}\text{C}$ of the temperature at which the dielectric properties were determined. The liquid depth in the phantom used for measurements was 15cm $\pm$ 0.5cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the S.A.R. tests reported herein:

	Target	Measured
Ambient Temperature	20 - 25 °C	Range: 22.9-24.5 °C Avg. 22.8°C
Relative Humidity	30 - 70 %	Range: 42.1-65% Avg. 47.2%
Tissue Temperature	NA	Range: 20.5-22.3°C Avg. 21.40°C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the S.A.R. scans are repeated. However, the lab environment is sufficiently protected such that no S.A.R. impacting interference has been experienced to date.

5.0 Description of Test Procedure

All options and accessories listed in section 3.0 were considered in order to develop the S.A.R. test plan for this product. S.A.R. measurements were performed using a flat phantom to assess performance at the abdomen and a SAM phantom to assess performance at the side of the head and in front of the face using the applicable transmission modes.

The DUT was assessed at the TX center frequency of the 806-825MHz band, with the antenna in and out, at the left ear of the SAM phantom, in the 1:3 transmission mode, in the cheek touch position, using the offered batteries.

The DUT was assessed at the TX center frequency of the 806-825MHz band, with the antenna in and out, at the left ear of the SAM phantom, in 1:3 transmission mode, in the 15° tilt position, using the battery above that produced the highest S.A.R. result.

The DUT was assessed at the band edges of the 806-825MHz band, with the antenna in and out, at the left ear of the SAM phantom, in the 1:3 transmission mode, in the cheek touch position, using the configuration from the left ear assessment above that produced the highest S.A.R. results.

The DUT was assessed at the TX center frequency of the 806-825MHz band, with the antenna in and out, at the right ear of the SAM phantom, in 1:3 transmission mode, in the cheek touch and 15° tilt positions, using the battery that produced the highest S.A.R. results at the left ear.

The DUT was assessed at the transmission band edges of the 806-825MHz band, with antenna in and out, at the right ear of the SAM phantom, in 1:3 transmission mode, using the test configuration that produced the highest S.A.R. results at the right ear above.

The DUT was assessed at the TX center frequency, with the antenna in and out, with 2.5cm separation distance, using the flat area of the SAM phantom, in 1:6 transmission mode, using the battery that produced the highest S.A.R. results from the head assessments above. The band edges of the 806-825 MHz band were assessed using the antenna position that produced the highest S.A.R. from above.

The DUT was assessed at the TX center frequency of the 896-902 MHz band, with the antenna in and out, at the left ear of the SAM phantom, in the 1:3 transmission mode, in the cheek touch position, using the offered batteries.

The DUT was assessed at the TX center frequency of the 896-902MHz band, with the antenna in and out, at the left ear of the SAM phantom, in 1:3 transmission mode, in the 15° tilt position, using the battery above that produced the highest S.A.R. result.

The DUT was assessed at the band edges of the 896-902MHz band, with the antenna in and out, at the left ear of the SAM phantom, in the 1:3 transmission mode, in the cheek touch position, using the configuration from the left ear assessment above that produced the highest S.A.R. results.

The DUT was assessed at the TX center frequency of the 896-902MHz band, with the antenna in and out, at the right ear of the SAM phantom, in 1:3 transmission mode, in the cheek touch and 15° tilt positions, using the battery that produced the highest S.A.R. results at the left ear.

The DUT was assessed at the transmission band edges of the 896-902 MHz band, with antenna in and out, at the right ear of the SAM phantom, in 1:3 transmission mode, using the test configuration that produced the highest S.A.R. results at the right ear above.

The DUT was assessed at the TX center frequency and band edges of the 896-902MHz band, with the antenna in and out, with 2.5cm separation from the flat area of the SAM phantom, in 1:6 transmission mode, using the battery that produced the highest S.A.R. results from the head assessments.

A “shortened” scan was performed using the configuration from the head and face assessment above that produced the highest S.A.R. results.

The DUT was assessed at the TX center frequency of the 806-825MHz band, against the flat phantom, in the 81:120 transmission mode, with antenna in and out, using the offered carry case accessory, standard data cable accessory, along with each offered batteries.

The DUT was assessed at the TX center frequency of the 806-825MHz band, against the flat phantom, in the 81:120 transmission mode, with antenna in and out, using the battery from above that produced the highest S.A.R. results, along with the applicable data cable attachments. Assessment with 2.5cm separation distance was also performed.

The DUT was assessed at the TX center frequency of the 806-825MHz band, against the flat phantom, with antenna in and out, in the 1:3 transmission mode, using the battery from above that produced the highest S.A.R., along with each applicable audio accessories.

The DUT was assessed at the TX band edges of the 806-825MHz band, against the flat phantom, in the 81:120 transmission mode, using the configuration from above that produced the highest S.A.R.

The DUT was assessed at the TX center frequency of the 896-902MHz band, against the flat phantom, in the 1:3 transmission mode (81:120 Packet Data mode not functional in the 896-902Mhz band), with antenna in and out, using the audio accessory configuration from the 806-825MHz assessment above that produced the highest S.A.R. results.

The DUT was assessed at the TX band edges of the 896-902MHz band, against the flat phantom, in the 1:3 transmission mode, using the configuration from above that produced the highest S.A.R. results.

The DUT was assessed against the flat phantom, with DUT back and front 2.5cm separation distance, using the configuration from both the 806-825MHz and 896-902MHz assessment above that produced the highest S.A.R. results.

A “shortened” scan was performed using the configuration at the abdomen from above that produced the highest S.A.R. results.

5.1 Device Test Positions

Reference figure 1 for the device orientation and position which exhibited the highest S.A.R. performance.

5.1.1 Abdomen

The DUT was positioned such that it was centered against the flat phantom with and the carry case and applicable accessory attachments. The front side and backside of the DUT were positioned with 2.5cm separation distance from the flat phantom.

5.1.2 Head

The DUT was placed in the cheek touch and 15° tilt positions at the left and right ears of the SAM phantom

5.1.3 Face

The DUT was placed with 2.5cm separation from the flat area of the SAM phantom.

5.2 Test Position Photographs

Figure 1: Highest S.A.R. Test Position (@ the Abdomen)
(DUT with carry case model NNTN4681A against the phantom, antenna retracted)

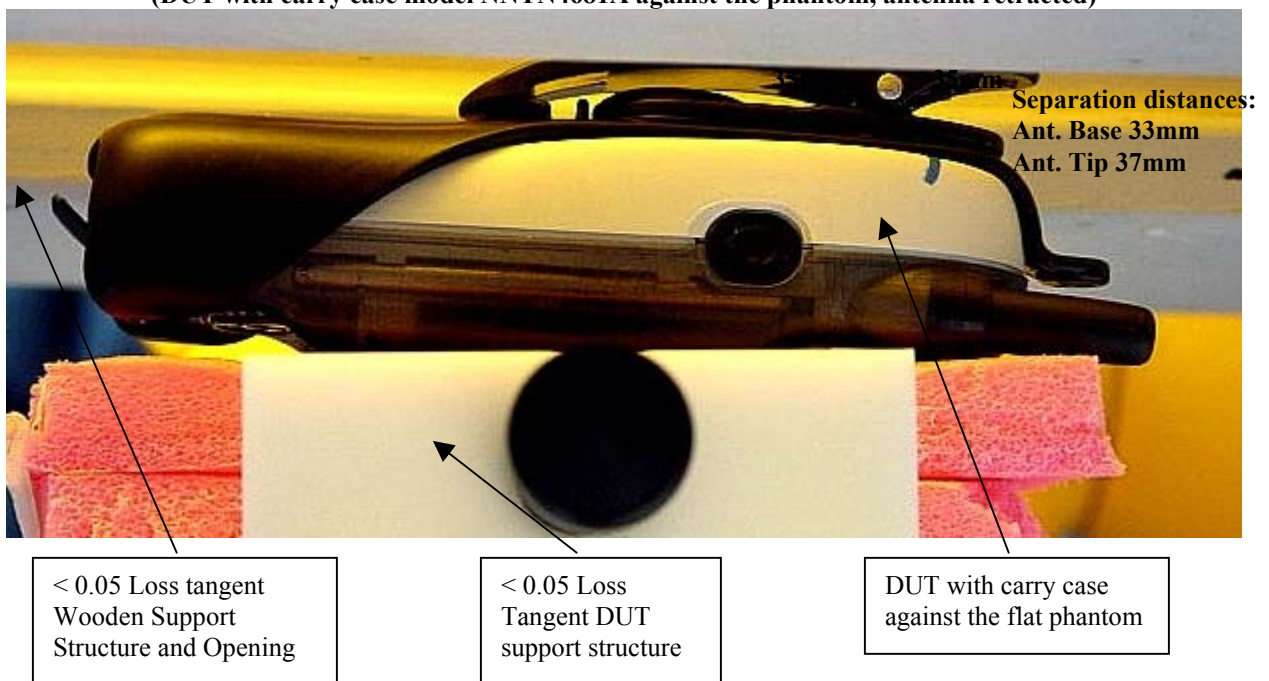


Figure 2. Assessment @ the Left ear; Cheek touch position; with antenna retracted. Same position used for antenna extended.



Figure 3. Assessment @ the Left ear; 15° tilt position; with antenna retracted. Same position used for antenna extended.

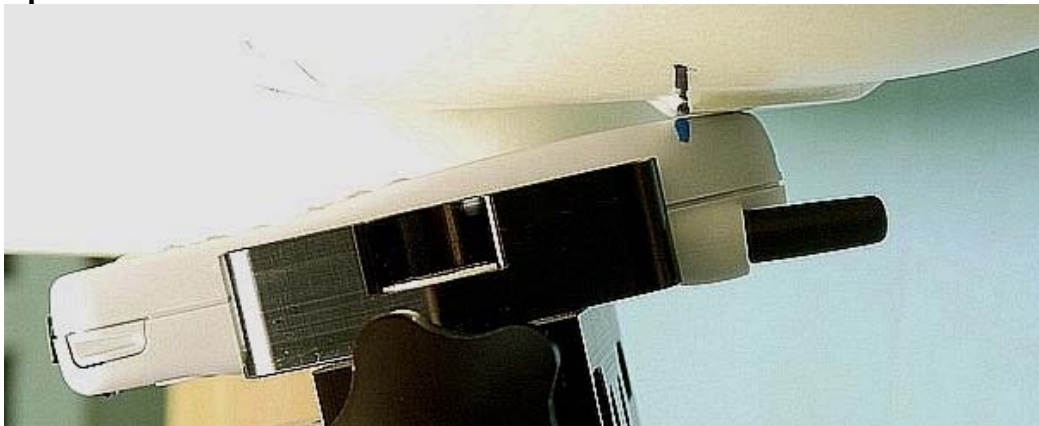


Figure 4. Assessment @ the Right ear; Cheek touch position; with antenna retracted. Same position used for antenna extended.



Figure 5. Assessment @ the Right ear; 15° tilt position; with antenna retracted. Same position used for antenna extended.



Figure 6. Assessment @ the Face; DUT microphone 2.5cm separation distance from flat area of SAM phantom



Figure 7. Assessment @ abdomen; DUT w/ carry case model NNTN4681A against the flat phantom and attached data cable model NKN6544B. Same position used to assess data cable models NKN6540A, NNTN4007A, NNTN4049A, NNTN4877A w/ antenna in and out.



Min. Separation distances ant. in:
Ant. Base = 33mm
Ant. Tip = 37mm

Figure 8. Assessment @ the Abdomen; with carry case model NNTN4681A and audio accessory model SYN8390B. Same position used to assess audio accessory models SYN8146C, NTN8513B, SYSN7875C, NTN8496A, NNTN4033A, and NSN6066A w/ antenna in and out.



Figure 9. Assessment @ the Abdomen; DUT front 2.5cm separation. Similar position used for DUT back 2.5cm from phantom

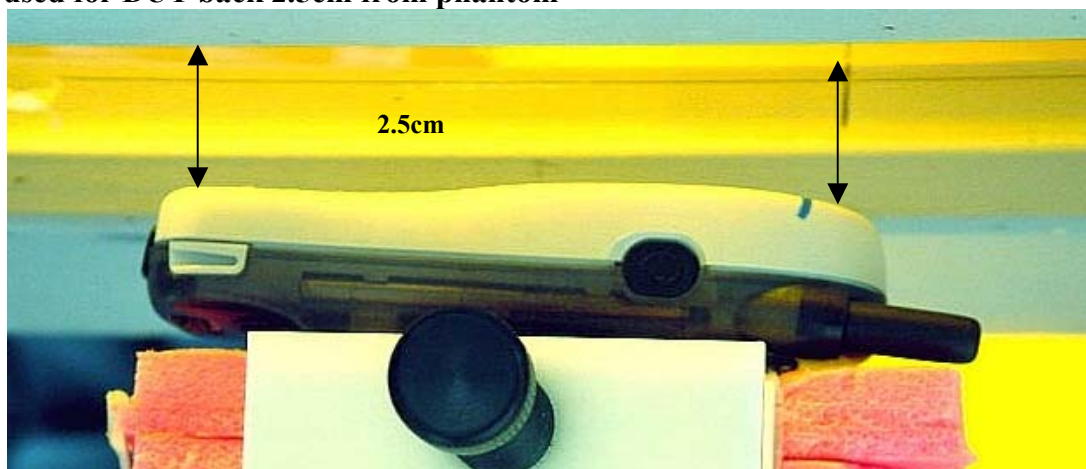


Figure 10: Robot Test System (Flat Phantom)

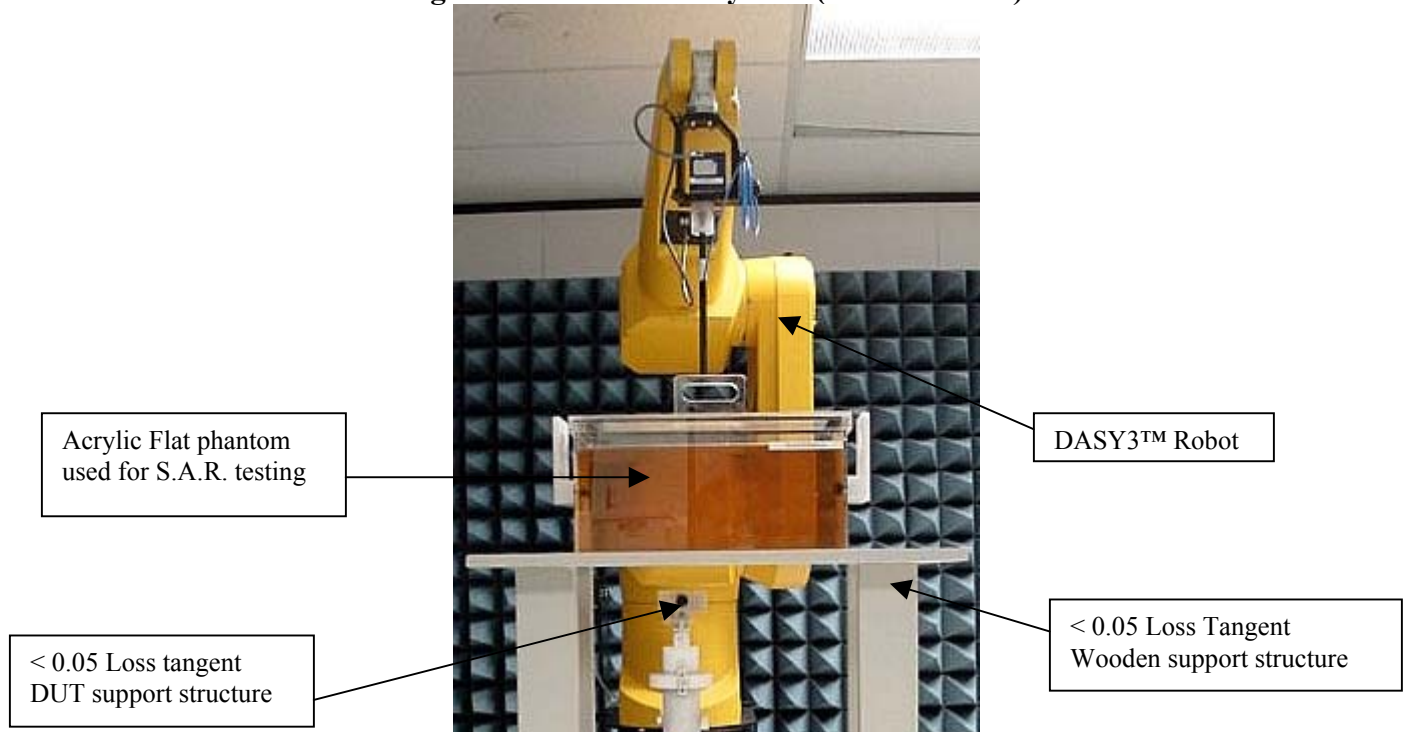


Figure 11: Robot Test System (SAM phantom)



5.3 Probe Scan Procedures

The E-field probe is first scanned in a coarse grid over a large area inside the phantom in order to locate the interpolated maximum S.A.R. distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

6.0 Measurement Uncertainty

Table 1: Uncertainty Budget for Device Under Test

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h =</i> <i>c x f / e</i>	<i>i =</i> <i>c x g / e</i>	<i>k</i>
Uncertainty Component	Section of IEEE P1528	Tol. (± %)	Prob. Dist.	Divisor	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (± %)	10 g <i>u_i</i> (± %)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	4.8	N	1.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	5.8	R	1.73	1	1	3.3	3.3	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	1.3	R	1.73	1	1	0.8	0.8	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.3	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	1.1	R	1.73	1	1	0.6	0.6	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.6	N	1.00	1	1	3.6	3.6	29
Device Holder Uncertainty	E.4.1	2.8	N	1.00	1	1	2.8	2.8	8
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Permittivity - deviation from target values	E.3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity - measurement uncertainty	E.3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Combined Standard Uncertainty			RSS				11.72	11.09	1363
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				22.98	21.75	

Table 2: Uncertainty Budget for System Performance Check

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i> = <i>f</i> (<i>d</i> , <i>k</i>)	<i>f</i>	<i>g</i>	<i>h</i> = <i>c</i> <i>x</i> <i>f</i> / <i>e</i>	<i>i</i> = <i>c</i> <i>x</i> <i>g</i> / <i>e</i>	<i>k</i>
Uncertainty Component	Section of IEEE P1528	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	4.8	N	1.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	5.8	R	1.73	1	1	3.3	3.3	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.3	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	1.1	R	1.73	1	1	0.6	0.6	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	1.0	R	1.73	1	1	0.6	0.6	∞
Input Power and SAR Drift Measurement	8, 6.6.2	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Permittivity - deviation from target values	E.3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity - measurement uncertainty	E.3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Combined Standard Uncertainty			RSS				10.16	9.43	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				19.92	18.48	

Notes for Tables 1 and 2

a) Column headings *a-k* are given for reference.

b) Tol. - tolerance in influence quantity.

c) Prob. Dist. – Probability distribution

d) N, R - normal, rectangular probability distributions

e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty

f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.

g) *u_i* – SAR uncertainty

h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty.

7.0 S.A.R. Test Results

All S.A.R. results obtained by the tests described in Section 5.0 are listed in section 7.1 below. The bolded result indicates the highest observed S.A.R. performance. DASY3™ S.A.R. measurement scans are provided in APPENDIX B for the highest observed S.A.R.

Appendix A presents a shortened S.A.R. cube scan to assess the validity of the calculated results presented herein.

Note: The results of the shortened cube scans presented in Appendix A demonstrate that the scaling methodology used to determine the calculated S.A.R. results presented herein are valid.

7.1 S.A.R. results

Battery assessment at the Left ear; Cheek Touch and Tilt; 1:3 mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Lear-R1-030328-04/364ADE005N	813.5125	In	NNTN4655A	Cheek touch	None	None	0.686	-0.540	0.919	1.06	0.645	0.75
CM-Lear-R1-030328-05/364ADE005N	813.5125	Out	NNTN4655A	Cheek touch	None	None	0.693	-0.540	0.415	0.48	0.295	0.34
CM-Lear-R1-030328-06/364ADE005N	813.5125	In	SNN5705B	Cheek touch	None	None	0.692	-0.800	0.688	0.84	0.489	0.60
CM-Lear-R1-030328-07/364ADE005N	813.5125	Out	SNN5705B	Cheek touch	None	None	0.701	-0.580	0.406	0.46	0.287	0.33
CM-Lear-R1-030328-08/364ADE005N	813.5125	In	SNN5704A	Cheek touch	None	None	0.684	-0.660	0.766	0.91	0.541	0.65
CM-Lear-R1-030328-09/364ADE005N	813.5125	Out	SNN5704A	Cheek touch	None	None	0.689	-0.660	0.390	0.46	0.278	0.33
CM-Lear-R1-030328-10/364ADE005N	813.5125	In	SNN5706A	Cheek touch	None	None	0.687	-0.600	0.821	0.96	0.577	0.68
CM-Lear-R1-030328-11/364ADE005N	813.5125	Out	SNN5706A	Cheek touch	None	None	0.689	-0.680	0.375	0.45	0.264	0.31
SW-Lear-R1-030401-02/364ADE005N	813.5125	In	NNTN4655A	15° Tilt	None	None	0.692	-0.520	0.570	0.65	0.399	0.46
SW-Lear-R1-030401-04/364ADE005N	813.5125	Out	NNTN4655A	15° Tilt	None	None	0.697	-0.710	0.489	0.58	0.339	0.40

Band edges assessment at the left ear; Cheek Touch; 1:3 mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Lear-R1-030401-05/364ADE005N	806.0125	In	NNTN4655A	Cheek touch	None	None	0.684	-0.580	0.792	0.93	0.559	0.654
SW-Lear-R1-030401-06/364ADE005N	806.0125	Out	NNTN4655A	Cheek touch	None	None	0.692	-0.610	0.403	0.47	0.287	0.334
SW-Lear-R1-030401-07/364ADE005N	824.9875	In	NNTN4655A	Cheek touch	None	None	0.690	-0.170	1.050	1.11	0.744	0.79
SW-Lear-R1-030401-08/364ADE005N	824.9875	Out	NNTN4655A	Cheek touch	None	None	0.692	-0.500	0.413	0.47	0.291	0.330

Cheek Touch and Tilt assessment at the Right ear; 1:3 mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Rear-R1-030331-16/364ADE005N	813.5125	In	NNTN4655A	Cheek touch	None	None	0.688	-0.560	0.802	0.93	0.563	0.65
CM-Rear-R1-030331-09/364ADE005N	813.5125	In	NNTN4655A	15° Tilt	None	None	0.684	-0.530	0.530	0.61	0.385	0.45
CM-Rear-R1-030331-10/364ADE005N	813.5125	Out	NNTN4655A	Cheek touch	None	None	0.686	-0.660	0.425	0.50	0.305	0.36
CM-Rear-R1-030331-11/364ADE005N	813.5125	Out	NNTN4655A	15° Tilt	None	None	0.688	-0.730	0.406	0.49	0.287	0.35

Band edges assessment at the Right ear; Cheek Touch; 1:3 mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Rear-R1-030331-12/364ADE005N	806.0125	In	NNTN4655A	Cheek touch	None	None	0.684	-0.780	0.666	0.82	0.476	0.58
CM-Rear-R1-030331-13/364ADE005N	806.0125	Out	NNTN4655A	Cheek touch	None	None	0.689	-0.820	0.438	0.54	0.306	0.38
CM-Rear-R1-030331-14/364ADE005N	824.9875	In	NNTN4655A	Cheek touch	None	None	0.685	0.030	0.957	0.98	0.678	0.69
CM-Rear-R1-030331-15/364ADE005N	824.9875	Out	NNTN4655A	Cheek touch	None	None	0.682	-0.430	0.444	0.50	0.312	0.35

Assessment at the Face; 2.5cm separation; 1:6 mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Face-R1-030403-06/364ADE005N	813.5125	In	NNTN4655A	2.5cm separation	None	None	0.679	0.07	0.161	0.08	0.117	0.06
SW-Face-R1-030403-07/364ADE005N	813.5125	Out	NNTN4655A	2.5cm separation	None	None	0.678	-0.21	0.118	0.06	0.085	0.05
SW-Face-R1-030403-08/364ADE005N	806.0125	In	NNTN4655A	2.5cm separation	None	None	0.675	-0.02	0.169	0.09	0.123	0.06
SW-Face-R1-030403-09/364ADE005N	824.9875	In	NNTN4655A	2.5cm separation	None	None	0.674	0.18	0.149	0.08	0.107	0.11

Assessment of offered batteries at the Left ear; Cheek touch and tilt; 1:3 mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-LEAR-R1-030401-09/364ADE005N	900.98125	In	NNTN4655A	Cheek touch	None	None	0.690	-0.340	0.903	0.99	0.616	0.68
SW-LEAR-R1-030401-10/364ADE005N	900.98125	Out	NNTN4655A	Cheek touch	None	None	0.693	-0.010	0.383	0.39	0.259	0.26
CM-LEAR-R1-030401-11/364ADE005N	900.98125	In	SNN5705B	Cheek touch	None	None	0.685	-0.520	0.907	1.04	0.625	0.72
CM-LEAR-R1-030401-12/364ADE005N	900.98125	Out	SNN5705B	Cheek touch	None	None	0.681	0.070	0.351	0.36	0.243	0.25
CM-LEAR-R1-030401-13/364ADE005N	900.98125	In	SNN5704A	Cheek touch	None	None	0.683	-0.480	0.924	1.06	0.632	0.72
CM-LEAR-R1-030401-14/364ADE005N	900.98125	Out	SNN5704A	Cheek touch	None	None	0.680	-0.510	0.362	0.42	0.250	0.29
CM-LEAR-R1-030401-15/364ADE005N	900.98125	In	SNN5706A	Cheek touch	None	None	0.681	-0.590	0.851	1.00	0.578	0.68
CM-LEAR-R1-030401-16/364ADE005N	900.98125	Out	SNN5706A	Cheek touch	None	None	0.680	0.090	0.379	0.39	0.257	0.26
CM-LEAR-R1-030401-17/364ADE005N	900.98125	In	SNN5704A	15° Tilt	None	None	0.688	-0.580	0.515	0.60	0.359	0.42
CM-LEAR-R1-030401-18/364ADE005N	900.98125	Out	SNN5704A	15° Tilt	None	None	0.681	-0.540	0.690	0.80	0.455	0.53

Band edge assessment at the Left ear; Cheek touch; 1:3 mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-LEAR-R1-030401-19/364ADE005N	896.01875	In	SNN5704A	Cheek touch	None	None	0.684	-0.580	1.020	1.19	0.698	0.82
SW-LEAR-R1-030402-02/364ADE005N	896.01875	Out	SNN5704A	Cheek touch	None	None	0.691	-0.330	0.381	0.42	0.261	0.29
SW-LEAR-R1-030402-03/364ADE005N	901.98125	In	SNN5704A	Cheek touch	None	None	0.681	-0.490	0.905	1.04	0.623	0.72
SW-LEAR-R1-030402-04/364ADE005N	901.98125	Out	SNN5704A	Cheek touch	None	None	0.686	-0.310	0.341	0.37	0.237	0.26

Cheek touch and tilt assessment at the Right ear; 1:3 mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-REAR-R1-030402-05/364ADE005N	900.98125	In	SNN5704A	Cheek touch	None	None	0.677	-0.490	0.852	0.99	0.589	0.68
SW-REAR-R1-030402-07/364ADE005N	900.98125	In	SNN5704A	15° Tilt	None	None	0.678	-0.450	0.520	0.60	0.365	0.42
SW-REAR-R1-030410-06/364ADE005N	900.98125	Out	SNN5704A	Cheek touch	None	None	0.675	-0.540	0.377	0.44	0.258	0.30
SW-REAR-R1-030402-09/364ADE005N	900.98125	Out	SNN5704A	15° Tilt	None	None	0.679	-0.580	0.623	0.73	0.410	0.48

Band edges assessment at the Right ear; Cheek touch; 1:3mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-REAR-R1-030402-10/364ADE005N	896.01875	In	SNN5704A	Cheek touch	None	None	0.678	-0.390	0.901	1.02	0.620	0.70
CM-REAR-R1-030402-11/364ADE005N	896.01875	Out	SNN5704A	Cheek touch	None	None	0.678	-0.390	0.390	0.44	0.265	0.30
CM-REAR-R1-030402-12/364ADE005N	901.98125	In	SNN5704A	Cheek touch	None	None	0.675	-0.590	0.788	0.94	0.541	0.64
CM-REAR-R1-030402-13/364ADE005N	901.98125	Out	SNN5704A	Cheek touch	None	None	0.681	-0.310	0.365	0.40	0.254	0.28

Assessment at the Face; 2.5cm separation; 1:6mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-FACE-R1-030403-03/364ADE005N	900.98125	In	SNN5704A	2.5cm separation	None	None	0.675	-0.04	0.176	0.09	0.124	0.06
SW-FACE-R1-030403-02/364ADE005N	900.98125	Out	SNN5704A	2.5cm separation	None	None	0.682	0.15	0.132	0.07	0.093	0.05
SW-FACE-R1-030403-04/364ADE005N	896.01875	In	SNN5704A	2.5cm separation	None	None	0.676	-0.15	0.187	0.10	0.131	0.07
CM-FACE-R1-030403-10/364ADE005N (See Shortened scan)	896.01875	In	SNN5704A	2.5cm separation	None	None	0.642	0.26	0.206	0.11	0.144	0.08
SW-FACE-R1-030403-05/364ADE005N	901.98125	In	SNN5704A	2.5cm separation	None	None	0.678	0.50	0.178	0.09	0.125	0.06

Assessment of offered batteries at the abdomen;; 81:120mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Ab-R1-030403-14/364ADE005N	813.5125	In	SNN5705B	Against phantom	NNTN4681A	NKN6544B	0.693	-1.02	0.422	0.54	0.306	0.39
SW-Ab-R1-030404-02/364ADE005N	813.5125	Out	SNN5705B	Against phantom	NNTN4681A	NKN6544B	0.695	-0.93	0.324	0.40	0.235	0.29
SW-Ab-R1-030404-03/364ADE005N	813.5125	In	SNN5704A	Against phantom	NNTN4681A	NKN6544B	0.690	-1.15	0.399	0.53	0.290	0.38
SW-Ab-R1-030404-04/364ADE005N	813.5125	Out	SNN5704A	Against phantom	NNTN4681A	NKN6544B	0.696	-1.16	0.330	0.43	0.242	0.32
SW-Ab-R1-030404-05/364ADE005N	813.5125	In	SNN5706A	Against phantom	NNTN4681A	NKN6544B	0.696	-0.88	0.381	0.47	0.278	0.34
SW-Ab-R1-030404-06/364ADE005N	813.5125	Out	SNN5706A	Against phantom	NNTN4681A	NKN6544B	0.685	-0.95	0.321	0.41	0.237	0.30
CM-Ab-R1-030404-07/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NKN6544B	0.680	-1.01	0.417	0.54	0.304	0.39
CM-Ab-R1-030404-08/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NKN6544B	0.684	-0.93	0.313	0.40	0.229	0.29

Assessment of offered data cable accessories at the abdomen; 81:120mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Ab-R1-030404-09/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	None	0.680	-1.24	0.914	1.252	0.671	0.919
SW-Ab-R1-030404-10/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	None	0.680	-0.82	0.485	0.603	0.354	0.44
SW-Ab-R1-030404-11/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NKN6540A	0.689	-0.73	0.329	0.40	0.239	0.29

SW-Ab-R1-030404-12/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NKN6540A	0.686	-0.93	0.350	0.44	0.254	0.32
SW-Ab-R1-030404-13/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NNTN4007A	0.685	-1.01	0.426	0.55	0.309	0.40
SW-Ab-R1-030407-02/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NNTN4007A	0.699	-1.00	0.294	0.37	0.212	0.27
CM-Ab-R1-030407-03/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NNTN4049A	0.695	-0.88	0.428	0.53	0.306	0.38
CM-Ab-R1-030407-04/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NNTN4049A	0.694	-1.16	0.251	0.33	0.177	0.23
CM-Ab-R1-030407-05/364ADE005N	813.5125	In	NNTN4655A	DUT front 2.5cm	None	NNTN4877A	0.691	-0.94	0.279	0.35	0.205	0.26
CM-Ab-R1-030407-06/364ADE005N	813.5125	Out	NNTN4655A	DUT front 2.5cm	None	NNTN4877A	0.690	-0.66	0.225	0.27	0.165	0.20

Assessment of offered audio accessories at the abdomen; 1:3mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Ab-R1-030407-10/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	SYN8390B	0.681	-0.29	0.574	0.63	0.415	0.46
SW-Ab-R1-030407-09/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	SYN8390B	0.683	-0.58	0.324	0.38	0.236	0.28
CM-Ab-R1-030407-11/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	SYN8146C	0.677	0.43	0.392	0.41	0.285	0.29
CM-Ab-R1-030407-12/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	SYN8146C	0.684	-0.55	0.257	0.30	0.185	0.21
CM-Ab-R1-030407-13/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	KIT SYN7875C	0.679	-0.48	0.431	0.50	0.315	0.36
CM-Ab-R1-030407-14/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	KIT SYN7875C	0.680	-0.59	0.280	0.33	0.202	0.24
CM-Ab-R1-030407-15/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NTN8496A	0.682	-0.49	0.430	0.49	0.313	0.36
CM-Ab-R1-030407-16/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NTN8496A	0.682	-0.61	0.262	0.31	0.193	0.23
CM-Ab-R1-030407-17/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NTN8513A	0.686	-0.42	0.422	0.47	0.306	0.34
CM-Ab-R1-030407-18/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NTN8513A	0.687	-0.62	0.236	0.28	0.170	0.20
SW-Ab-R1-030408-02/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NNTN4033A	0.683	-0.27	0.554	0.60	0.400	0.44
SW-Ab-R1-030408-03/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NNTN4033A	0.690	-0.59	0.350	0.41	0.250	0.29
SW-Ab-R1-030408-04/364ADE005N	813.5125	In	NNTN4655A	Against phantom	NNTN4681A	NSN6066A	0.683	-0.59	0.272	0.32	0.194	0.23
SW-Ab-R1-030408-05/364ADE005N	813.5125	Out	NNTN4655A	Against phantom	NNTN4681A	NSN6066A	0.685	-0.61	0.182	0.21	0.132	0.16

Band edges assessment at the abdomen; 81:120mode; 806-825MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Ab-R1-030408-06/364ADE005N	806.0125	In	NNTN4655A	Against phantom	NNTN4681A	None	0.694	-1.03	0.837	1.07	0.615	0.79
SW-Ab-R1-030408-07/364ADE005N	824.9875	In	NNTN4655A	Against phantom	NNTN4681A	None	0.690	-0.96	1.060	1.34	0.771	0.98
CM-Ab-R1-030409-07/364ADE005N (See Shortened scan)	824.9875	In	NNTN4655A	Against phantom	NNTN4681A	None	0.679	-0.34	1.250	1.39	0.896	1.00

Assessment of offered batteries at the abdomen; w/ worst case audio accessory from 806-825MHz assessment 1:3 mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
CM-Ab-R1-030408-12	900.98125	In	SNN5705B	Against phantom	NNTN4681A	SYN8390B	0.675	-0.49	0.348	0.40	0.249	0.29
SW-Ab-R1-030410-02/364ADE005N	900.98125	Out	SNN5705B	Against phantom	NNTN4681A	SYN8390B	0.685	-0.38	0.225	0.25	0.160	0.18
CM-Ab-R1-030408-14/364ADE005N	900.98125	In	SNN5704A	Against phantom	NNTN4681A	SYN8390B	0.678	-0.56	0.453	0.53	0.320	0.38
CM-Ab-R1-030408-15/364ADE005N	900.98125	Out	SNN5704A	Against phantom	NNTN4681A	SYN8390B	0.680	-0.36	0.299	0.33	0.212	0.24
CM-Ab-R1-030408-08/364ADE005N	900.98125	In	SNN5706A	Against phantom	NNTN4681A	SYN8390B	0.679	-0.33	0.412	0.46	0.290	0.32
CM-Ab-R1-030408-09/364ADE005N	900.98125	Out	SNN5706A	Against phantom	NNTN4681A	SYN8390B	0.677	0.10	0.225	0.23	0.160	0.17
CM-Ab-R1-030408-10/364ADE005N	900.98125	In	NNTN4655 A	Against phantom	NNTN4681A	SYN8390B	0.681	0.13	0.431	0.44	0.295	0.30
CM-Ab-R1-030408-11/364ADE005N	900.98125	Out	NNTN4655 A	Against phantom	NNTN4681A	SYN8390B	0.679	0.10	0.264	0.27	0.189	0.20

Band edges assessment at the abdomen; 81:120mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Ab-R1-030409-02/364ADE005N	896.01875	In	SNN5704A	Against phantom	NNTN4681A	SYN8390B	0.681	-0.10	0.508	0.53	0.357	0.38
SW-Ab-R1-030409-03/364ADE005N	901.98125	In	SNN5704A	Against phantom	NNTN4681A	SYN8390B	0.687	-0.42	0.566	0.64	0.401	0.45

Assessment at the abdomen; 2.5cm separation; w/ overall worst case configuration; 81:120mode; 896-902MHz band												
Run Number/ SN	Freq. (MHz)	Antenna Position	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
SW-Ab-R1-030409- 05/364ADE005N	824.9875	In	NNTN4655A	DUT Front 2.5cm separation	None	None	0.684	-0.91	0.671	0.85	0.490	0.62
SW-Ab-R1-030409- 06/364ADE005N	824.9875	In	NNTN4655A	DUT back 2.5cm separation	None	None	0.687	-0.89	0.626	0.78	0.453	0.57

7.2 Peak S.A.R. location

Refer to APPENDIX B for detailed S.A.R. scan distributions.

7.3 Highest S.A.R. results calculation methodology

The calculated maximum 1-gram and 10-gram averaged S.A.R. values are determined by scaling the measured S.A.R. to account for power leveling variations and power slump. For this device the Maximum Calculated 1-gram and 10-gram averaged peak S.A.R. is calculated using the following formula:

$$\text{Max. Calc. 1-g Avg. SAR} = ((\text{S.A.R. meas.} / (10^{(\text{Pdrift}/10)})) * (\text{Pmax}/\text{Pint}))$$

$$P_{\text{max}} = \text{Maximum Power (mW)}$$

$$P_{\text{int}} = \text{Initial Power (mW)}$$

$$\text{SAR}_{\text{meas.}} = \text{Measured 1 or 10 gram averaged peak S.A.R. (mW/g)}$$

Note: for positive drift values Max. Calc. S.A.R. = (measured S.A.R. * (Max Pwr/Init. Pwr.))

Note: 50% duty cycle is applied for PTT operation in front of the face.

8.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average S.A.R. values found for FCC ID: AZ489FT5822 model H62XAH6RR1AN.

At the abdomen: 1-g Avg. = 1.39 mW/g; 10-g Avg. = 1.00 mW/g

At the Face: 1-g Avg. = 0.11 mW/g; 10-g Avg. = 0.08 mW/g

At the Head: 1-g Avg. = 1.19 mW/g; 10-g Avg. = 0.82 mW/g

These test results clearly demonstrate compliance with FCC General Population/Uncontrolled RF Exposure limits of **1.6 mW/g** per the requirements of 47 CFR 2.1093(d)