

EXHIBIT 6c: MEASURED DATA – Pursuant 47 CFR 2.1041**6.6 Radiated Spurious Emissions -- Pursuant 47 CFR 2.1053, 2.1057, 90.210(g)(3), 90.691(a)(2), 15.247(c)****6.6.1 Cellular band Limits**

Per 90.210(g)(3) and 90.691(a)(2), radiated spurious emissions shall be attenuated below the maximum level of emission of the carrier frequency in accordance with the following formula:

Spurious attenuation in dB = $43 + 10 \log_{10} (P)$
(Thus the effective limit is -13 dBm for any transmitter power level).

6.6.2 ISM Band Limits

Per 15.247(c) the peak allowable emission shall be less than 10 dBm when measured in a 100 kHz band outside the ISM Band.

NOTE 1: Spurious emissions are dependent on the linearity of the Power Amplifier (U516) and are independent of modulation type or TDM interleaving. Thus, for the Cellular Band, emissions were tested with the radio set to Quad-16QAM at both maximum and minimum radio output power settings.

NOTE 2: An asterisk () in the data indicates the spurious emission was less than -33 dBm or could not be detected due to noise limitations or ambients.*

NOTE 3: Spurious emission levels were measured with the non-detachable antenna mounted on the radio product, as in intended use.

Motorola Inc.


FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

806.0625 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1612.1250 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2418.1875 | -13 | -32.03 | <-36 dBm |
| 4XFund | 3224.2500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4030.3125 | -13 | * | * |
| 6XFund | 4836.3750 | -13 | * | * |
| 7XFund | 5642.4375 | -13 | * | * |
| 8XFund | 6448.5000 | -13 | * | * |
| 9XFund | 7254.5625 | -13 | * | * |
| 10XFund | 8060.6250 | -13 | * | * |

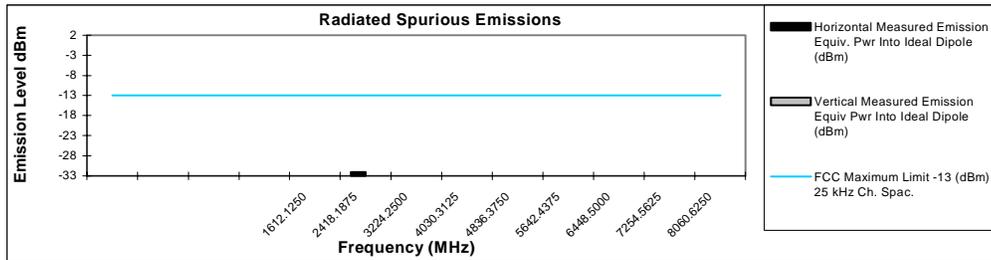


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

813.5625 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1627.1250 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2440.6875 | -13 | -31.55 | <-36 dBm |
| 4XFund | 3254.2500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4067.8125 | -13 | * | * |
| 6XFund | 4881.3750 | -13 | * | * |
| 7XFund | 5694.9375 | -13 | * | * |
| 8XFund | 6508.5000 | -13 | * | * |
| 9XFund | 7322.0625 | -13 | * | * |
| 10XFund | 8135.6250 | -13 | * | * |

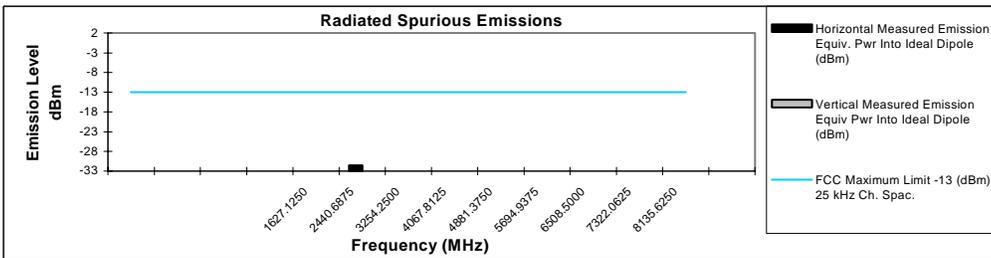

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Figure 6.25. Radiated Emissions 800 MHz Band at High Power (1)

Motorola Inc.


FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

820.9875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1641.9750 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2462.9625 | -13 | 35.62 | * |
| 4XFund | 3283.9500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4104.9375 | -13 | * | * |
| 6XFund | 4925.9250 | -13 | * | * |
| 7XFund | 5746.9125 | -13 | * | * |
| 8XFund | 6567.9000 | -13 | * | * |
| 9XFund | 7388.8875 | -13 | * | * |
| 10XFund | 8209.8750 | -13 | * | * |

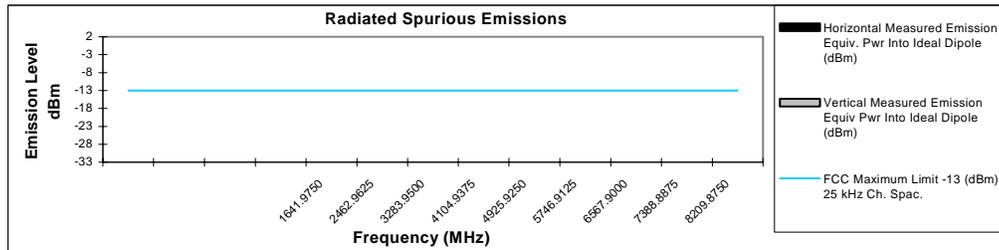


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

824.9875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1649.9750 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2474.9625 | -13 | 35.15 | * |
| 4XFund | 3299.9500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4124.9375 | -13 | * | * |
| 6XFund | 4949.9250 | -13 | * | * |
| 7XFund | 5774.9125 | -13 | * | * |
| 8XFund | 6599.9000 | -13 | * | * |
| 9XFund | 7424.8875 | -13 | * | * |
| 10XFund | 8249.8750 | -13 | * | * |

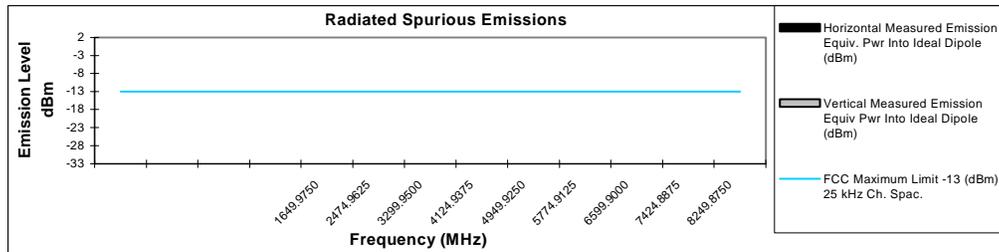

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Figure 6.26. Radiated Emissions 800 MHz Band at High Power (2)


Motorola Inc.

FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

806.0625 MHz Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1612.1250 | -13 | <-36dBm | <-36dBm |
| 3XFund | 2418.1875 | -13 | <-36dBm | * |
| 4XFund | 3224.2500 | -13 | <-36dBm | <-36dBm |
| 5XFund | 4030.3125 | -13 | * | * |
| 6XFund | 4836.3750 | -13 | * | * |
| 7XFund | 5642.4375 | -13 | * | * |
| 8XFund | 6448.5000 | -13 | * | * |
| 9XFund | 7254.5625 | -13 | * | * |
| 10XFund | 8060.6250 | -13 | * | * |

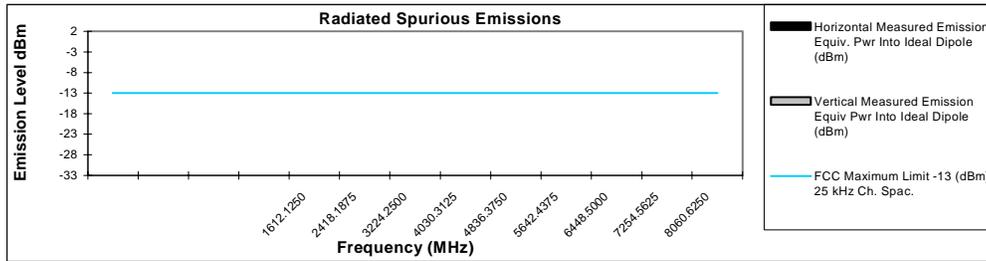


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

813.5625 MHz Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1627.1250 | -13 | <-36dBm | <-36dBm |
| 3XFund | 2440.6875 | -13 | <-36dBm | * |
| 4XFund | 3254.2500 | -13 | <-36dBm | <-36dBm |
| 5XFund | 4067.8125 | -13 | * | * |
| 6XFund | 4881.3750 | -13 | * | * |
| 7XFund | 5694.9375 | -13 | * | * |
| 8XFund | 6508.5000 | -13 | * | * |
| 9XFund | 7322.0625 | -13 | * | * |
| 10XFund | 8135.6250 | -13 | * | * |

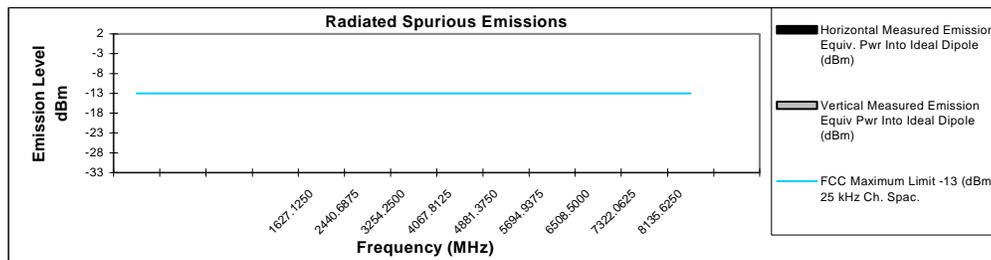

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Constantin Belean

January 27, 2004

FCC Registration: 91932 / Industry Canada: IC3679

Figure 6.27 Spurious Emissions 800 MHz Band at Low Power (1).

FCC Registration: 91932 / Industry Canada: IC3679

Motorola Inc.


FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

820.9875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1641.9750 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2462.9625 | -13 | <-36 dBm | * |
| 4XFund | 3283.9500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4104.9375 | -13 | * | * |
| 6XFund | 4925.9250 | -13 | * | * |
| 7XFund | 5746.9125 | -13 | * | * |
| 8XFund | 6567.9000 | -13 | * | * |
| 9XFund | 7388.8875 | -13 | * | * |
| 10XFund | 8209.8750 | -13 | * | * |

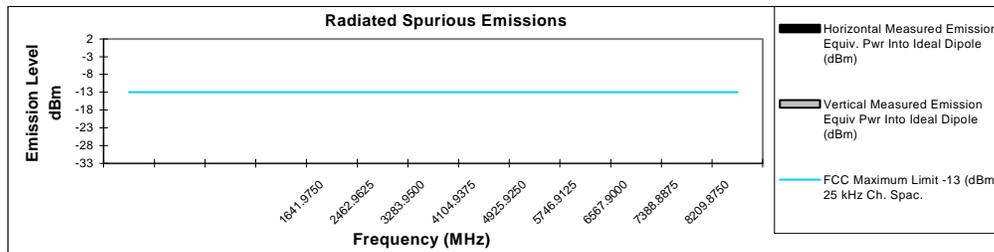


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

824.9875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1649.9750 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2474.9625 | -13 | <-36 dBm | * |
| 4XFund | 3299.9500 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4124.9375 | -13 | * | * |
| 6XFund | 4949.9250 | -13 | * | * |
| 7XFund | 5774.9125 | -13 | * | * |
| 8XFund | 6599.9000 | -13 | * | * |
| 9XFund | 7424.8875 | -13 | * | * |
| 10XFund | 8249.8750 | -13 | * | * |

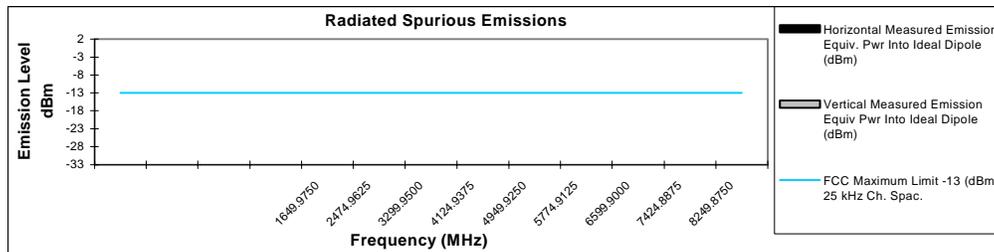

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Figure 6-28 Spurious Emissions 800 MHz Band at Low power (2).

Motorola Inc.


FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

896.01875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1792.0375 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2688.0563 | -13 | <-36 dBm | <-36 dBm |
| 4XFund | 3584.0750 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4480.0938 | -13 | * | * |
| 6XFund | 5376.1125 | -13 | * | * |
| 7XFund | 6272.1313 | -13 | * | * |
| 8XFund | 7168.1500 | -13 | * | * |
| 9XFund | 8064.1688 | -13 | * | * |
| 10XFund | 8960.1875 | -13 | * | * |

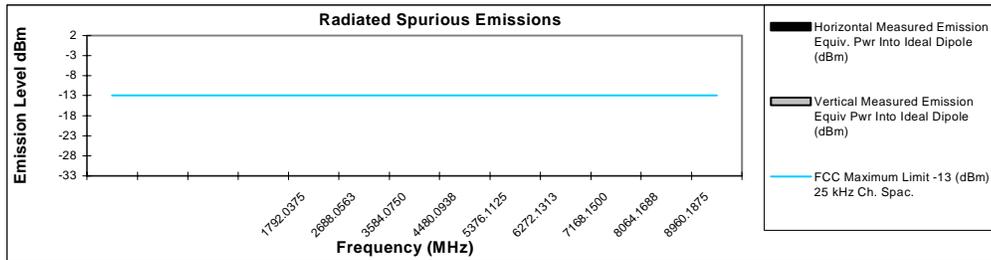


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

900.98125 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1801.9625 | -13 | <-36 dBm | <-36 dBm |
| 3XFund | 2702.9438 | -13 | <-36 dBm | <-36 dBm |
| 4XFund | 3603.9250 | -13 | <-36 dBm | <-36 dBm |
| 5XFund | 4504.9063 | -13 | * | * |
| 6XFund | 5405.8875 | -13 | * | * |
| 7XFund | 6306.8688 | -13 | * | * |
| 8XFund | 7207.8500 | -13 | * | * |
| 9XFund | 8108.8313 | -13 | * | * |
| 10XFund | 9009.8125 | -13 | * | * |

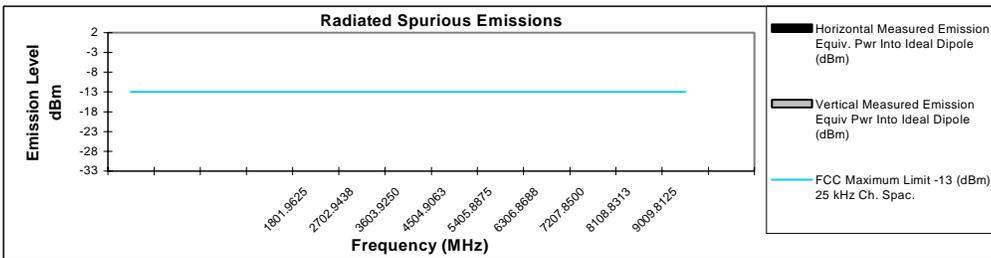

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Figure 6.29 Radiated Emissions in 900 MHz Band at High Power

Motorola Inc.


FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

896.01875 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1792.0375 | -13 | * | <-36 dBm |
| 3XFund | 2688.0563 | -13 | <-36 dBm | * |
| 4XFund | 3584.0750 | -13 | <-36 dBm | * |
| 5XFund | 4480.0938 | -13 | * | * |
| 6XFund | 5376.1125 | -13 | * | * |
| 7XFund | 6272.1313 | -13 | * | * |
| 8XFund | 7168.1500 | -13 | * | * |
| 9XFund | 8064.1688 | -13 | * | * |
| 10XFund | 8960.1875 | -13 | * | * |

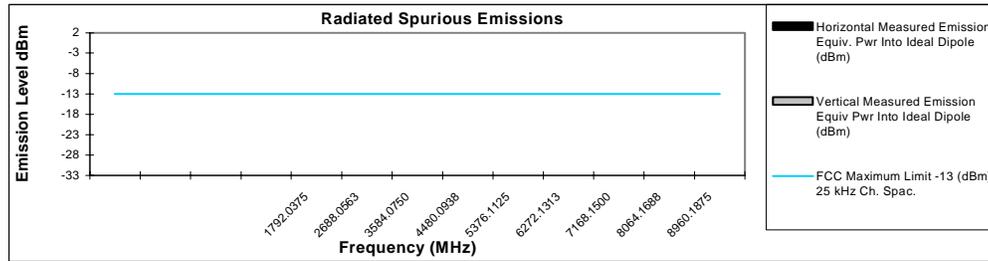


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

900.98125 MHz

Channel Spacing 12.5KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit -13 (dBm) 25 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| | | -13 | | |
| 2XFund | 1801.9625 | -13 | * | <-36 dBm |
| 3XFund | 2702.9438 | -13 | * | * |
| 4XFund | 3603.9250 | -13 | * | * |
| 5XFund | 4504.9063 | -13 | * | * |
| 6XFund | 5405.8875 | -13 | * | * |
| 7XFund | 6306.8688 | -13 | * | * |
| 8XFund | 7207.8500 | -13 | * | * |
| 9XFund | 8108.8313 | -13 | * | * |
| 10XFund | 9009.8125 | -13 | * | * |

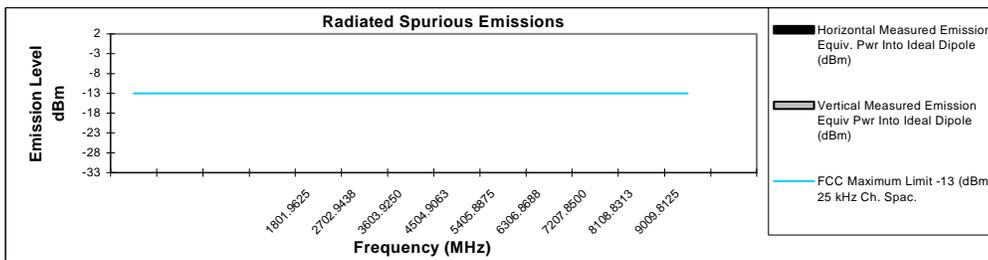

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Constantin Belean

January 27, 2004

FCC Registration: 91932 / Industry Canada: IC3679

Figure 6.30 Spurious Emissions 900 MHz Band at Low Power.


Motorola Inc.

FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325

902.525 MHz Channel Spacing 50KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit +10 (dBm) 100 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|-----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| 2XFund | 1805.0500 | 10 | <-36 dBm | <-36 dBm |
| 3XFund | 2707.5750 | 10 | <-36 dBm | <-36 dBm |
| 4XFund | 3610.1000 | 10 | * | * |
| 5XFund | 4512.6250 | 10 | * | * |
| 6XFund | 5415.1500 | 10 | * | * |
| 7XFund | 6317.6750 | 10 | * | * |
| 8XFund | 7220.2000 | 10 | * | * |
| 9XFund | 8122.7250 | 10 | * | * |
| 10XFund | 9025.2500 | 10 | * | * |

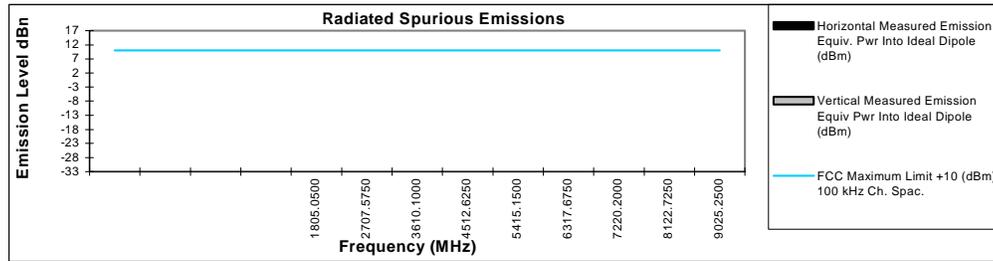


* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

Transmitter Radiated Spurious Emissions: i325

915.525 MHz Channel Spacing 50KHZ S/N 364ADYQ031

| Spur | Frequency (MHz) | FCC Maximum Limit +10 (dBm) 100 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|-----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| 2XFund | 1831.0500 | 10 | <-36 dBm | <-36 dBm |
| 3XFund | 2746.5750 | 10 | <-36 dBm | <-36 dBm |
| 4XFund | 3662.1000 | 10 | * | * |
| 5XFund | 4577.6250 | 10 | * | * |
| 6XFund | 5493.1500 | 10 | * | * |
| 7XFund | 6408.6750 | 10 | * | * |
| 8XFund | 7324.2000 | 10 | * | * |
| 9XFund | 8239.7250 | 10 | * | * |
| 10XFund | 9155.2500 | 10 | * | * |

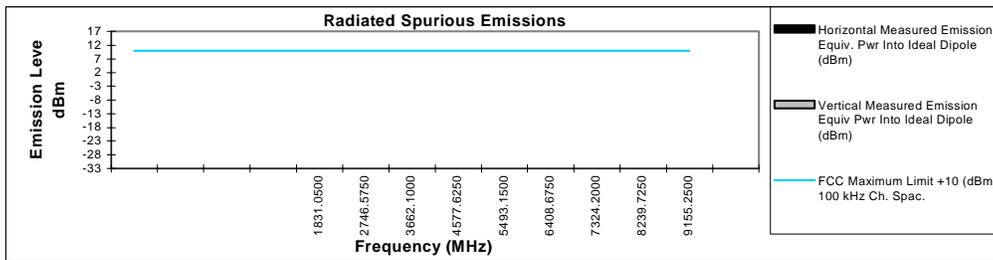

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


Figure 6.31 Spurious Emissions 900 Mhz ISM Band.

Motorola Inc.

FCC ID:AZ489FT5830

Transmitter Radiated Spurious Emissions: i325
927.475 MHz **Channel Spacing 50KHZ** **S/N 364ADYQ031**

| Spur | Frequency (MHz) | FCC Maximum Limit +10 (dBm) 100 kHz Ch. Spac. | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|---------|-----------------|-----------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------|
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| | | 10 | | |
| 2XFund | 1854.9500 | 10 | <-36 dBm | <-36 dBm |
| 3XFund | 2782.4250 | 10 | <-36 dBm | <-36 dBm |
| 4XFund | 3709.9000 | 10 | * | * |
| 5XFund | 4637.3750 | 10 | * | * |
| 6XFund | 5564.8500 | 10 | * | * |
| 7XFund | 6492.3250 | 10 | * | * |
| 8XFund | 7419.8000 | 10 | * | * |
| 9XFund | 8347.2750 | 10 | * | * |
| 10XFund | 9274.7500 | 10 | * | * |

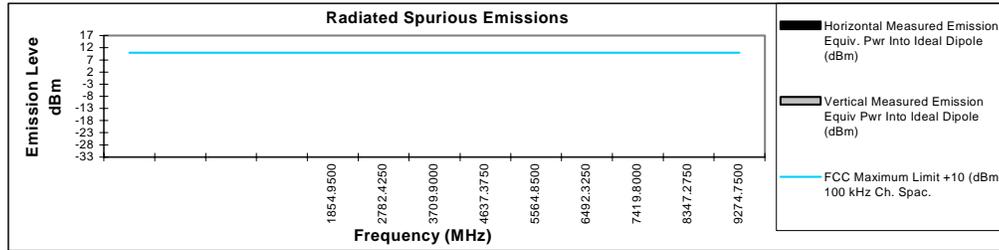

* Indicates the spurious emission was less than -70dBm or could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader

January 27, 2004

Figure 6.32 Spurious Emissions 900 MHz ISM Band.