



RADIO TEST REPORT

Report No.: STS2212010W04

Issued for

SHENZHEN REOSTUDIO TECHNOLOGY CO.,LTD

Room 213-214, Internet of Things Demonstration Park, No. 6
Minhuan Road, Longhua District, Shenzhen, China

Product Name:	Keyboard
Brand:	Nuphy
Model Number:	Halo75
Series Model(s):	N/A
FCC ID:	2A542-HALO75
Test Standard:	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name: SHENZHEN REOSTUDIO TECHNOLOGY CO.,LTD
Address.....: Room 213-214, Internet of Things Demonstration Park, No. 6
Minhuan Road, Longhua District, Shenzhen, China
Manufacture's Name: SHENZHEN ARBITER TECHNOLOGY CO.,LTD
Address.....: Floor 2, 3 and 4, Bldg. A, Meisheng Industrial Park, Chongqing
Rd., Fuhai St., Baoan Dist.,Shenzhen, Guangdong, China

Product Description

Product Name: Keyboard
Brand: Nuphy
Model Number.....: Halo75
Series Model(s): N/A

Test Standards.....: FCC Part15.249

Test Procedure: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:
Date of receipt of test item.....: 05 Dec. 2022
Date of performance of tests ...: 05 Dec. 2022 ~ 08 Dec. 2022
Date of Issue: 08 Dec. 2022
Test Result: **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 RADIATED EMISSION MEASUREMENT	16
4. BANDWIDTH TEST	33
4.1 TEST PROCEDURE	33
4.2 TEST SETUP	33
4.3 EUT OPERATION CONDITIONS	33
4.4 TEST RESULTS	34
5. ANTENNA REQUIREMENT	36
5.1 STANDARD REQUIREMENT	36
5.2 EUT ANTENNA	36
APPENDIX- PHOTOS OF TEST SETUP	37

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	08 Dec. 2022	STS2212010W04	ALL	Initial Issue






1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.249	Radiated Band Edge Emission	Pass	
15.249	Field Strength of fundamental	Pass	
15.215(c)	20dB Bandwidth	Pass	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.

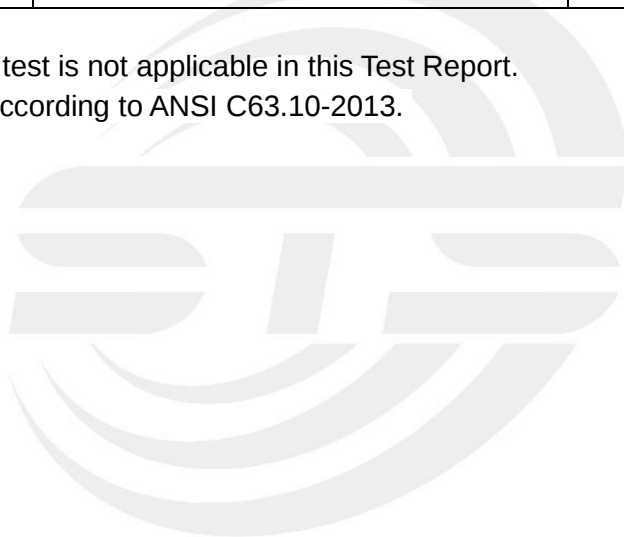



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.87\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.895\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.09\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.92\text{dB}$
6	All emissions, radiated >6G	$\pm 5.49\text{dB}$
7	Conducted Emission (9KHz-30MHz)	$\pm 2.73\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name/PMN	Keyboard								
Brand	Nuphy								
Model Number/HVIN	Halo75								
Series Model(s)	N/A								
Model Difference	N/A								
Product Description	The EUT is a Keyboard <table><tr><td>Operation Frequency:</td><td>2403~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>MSK</td></tr><tr><td>Antenna Type:</td><td>FPC</td></tr><tr><td>Antenna Gain(Peak):</td><td>2.91dBi</td></tr></table> Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.	Operation Frequency:	2403~2480 MHz	Modulation Type:	MSK	Antenna Type:	FPC	Antenna Gain(Peak):	2.91dBi
Operation Frequency:	2403~2480 MHz								
Modulation Type:	MSK								
Antenna Type:	FPC								
Antenna Gain(Peak):	2.91dBi								
Channel List	Please refer to the Note 3.								
Rating	Input: DC 5V 1A								
Battery	Rated Voltage:3.7V Charge Limit Voltage:4.2V Capacity: 4000mAh								
Hardware version number	A75-1-BT801VER1.2								
Software version number/FVIN	BYK916+3632_20221115_V0103								
Serial Numbers	Halo65US00162212190001								
Connecting I/O Port(s)	Please refer to the Note 1.								

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.
- 3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2403	07	2445	13	2419
02	2426	08	2466	14	2439
03	2441	09	2414	15	2453
04	2463	10	2436	16	2480
05	2407	11	2459	/	/
06	2422	12	2473	/	/



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Pretest Mode	Description	Data/Modulation
Mode 1	TX Low channel	MSK
Mode 2	TX Mid channel	MSK
Mode 3	TX High channel	MSK

Note:

(1) All above mode have been measurement, only worst data was reported.

(2) We have be tested for all available U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
Other SRD	2.4G Hopping	MSK	2.91	default	The EUT has signal transmission when it is powered on


2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Radiated Spurious Emission Test

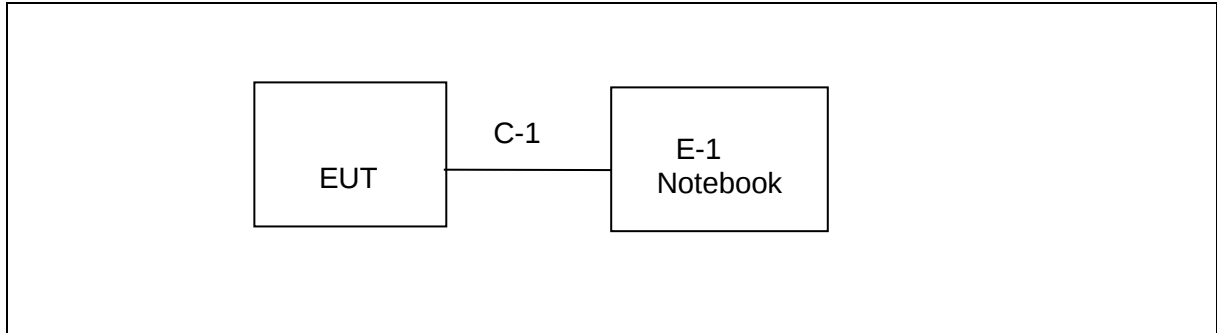

Conducted Emission Test

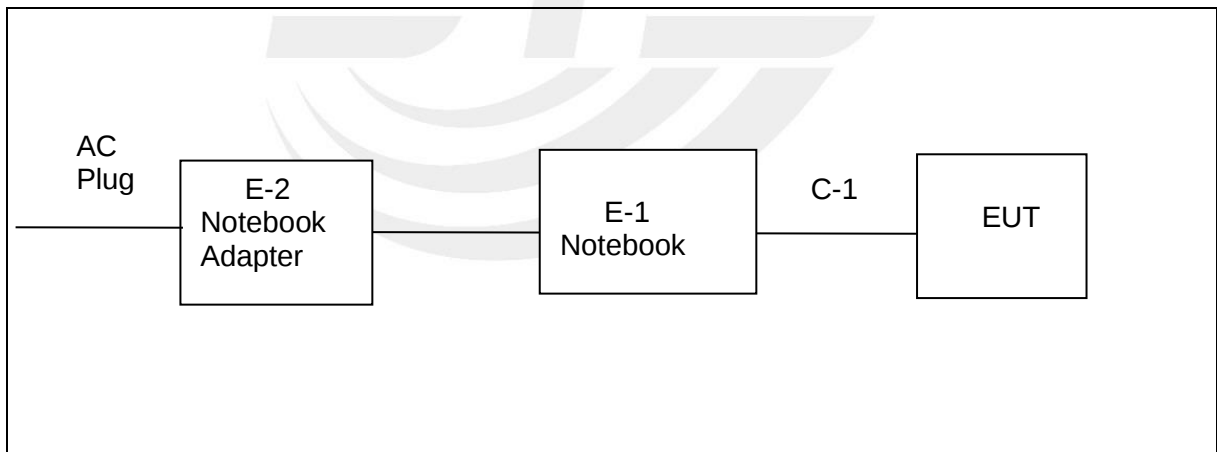



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook Adapter	LENOVO	ADLX45DLC3A	N/A	N/A
E-1	Notebook	LENOVO	Think Pad E470	N/A	N/A
C-1	USB Cable	N/A	N/A	150cm	NO

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2022.03.02	2023.03.01
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2022.07.04	2023.07.03
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2022.09.29	2023.09.28
Pre-mplier(18G-40G)	SKET	LNPA_1840-50	SK2018101801	2022.07.23	2023.07.22
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2022.09.29	2023.09.28
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Active loop Antenna	ZHINAN	ZN30900C	16035	2022.03.02	2023.03.01
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2021.10.11	2023.10.10
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2021.09.28	2023.09.27
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	EM	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2022.09.29	2023.09.28
LISN	R&S	ENV216	101242	2022.09.28	2023.09.27
LISN	EMCO	3810/2NM	23625	2022.09.28	2023.09.27
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2022.03.01	2023.02.28
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

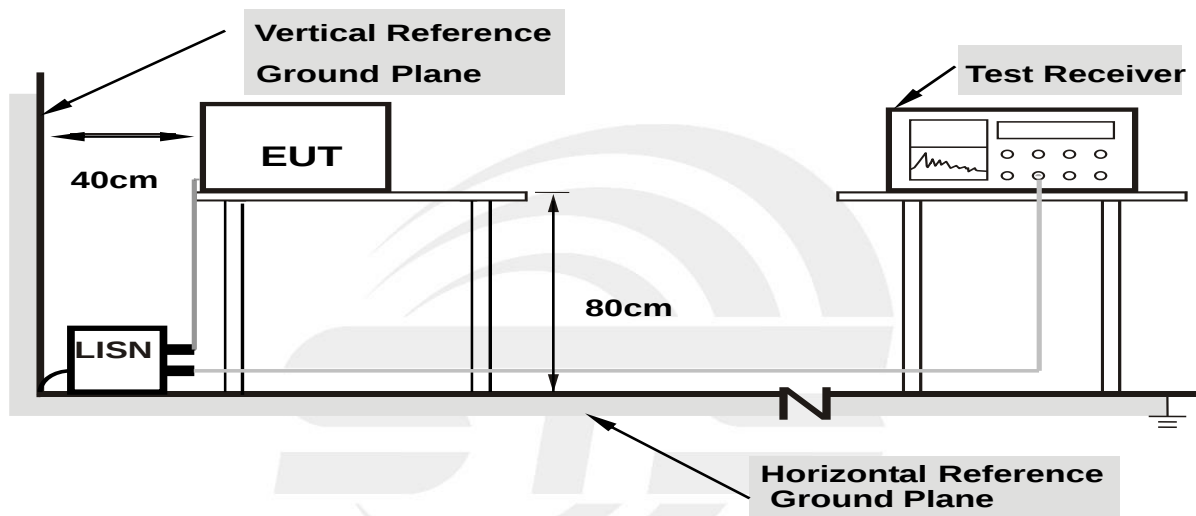

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	25.6(C)	Relative Humidity:	45%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	46.95	10.33	57.28	65.78	-8.50	QP
2	0.1540	28.99	10.33	39.32	55.78	-16.46	AVG
3	0.2060	39.91	10.34	50.25	63.37	-13.12	QP
4	0.2060	22.50	10.34	32.84	53.37	-20.53	AVG
5	0.5580	27.33	10.48	37.81	56.00	-18.19	QP
6	0.5580	16.17	10.48	26.65	46.00	-19.35	AVG
7	2.0620	31.54	10.30	41.84	56.00	-14.16	QP
8	2.0620	24.48	10.30	34.78	46.00	-11.22	AVG
9	5.0860	24.91	10.46	35.37	60.00	-24.63	QP
10	5.0860	13.13	10.46	23.59	50.00	-26.41	AVG
11	20.7260	20.35	12.85	33.20	60.00	-26.80	QP
12	20.7260	7.91	12.85	20.76	50.00	-29.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

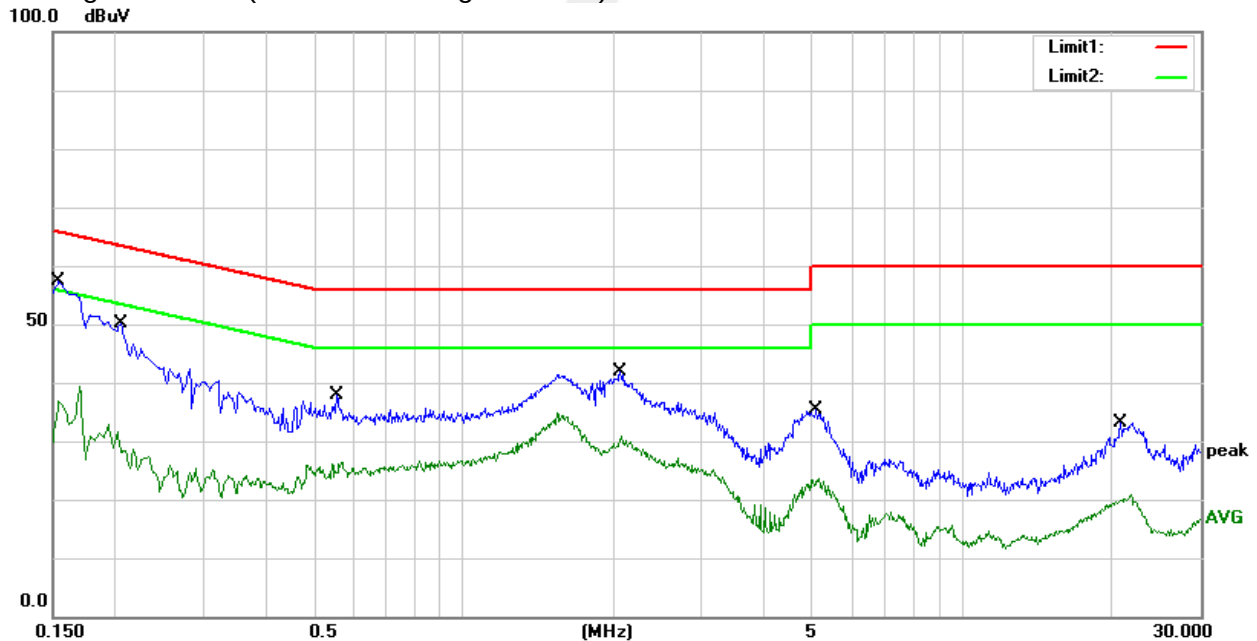




Temperature:	25.6(C)	Relative Humidity:	45%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	45.72	10.33	56.05	65.78	-9.73	QP
2	0.1540	27.68	10.33	38.01	55.78	-17.77	AVG
3	0.2300	37.03	10.44	47.47	62.45	-14.98	QP
4	0.2300	16.78	10.44	27.22	52.45	-25.23	AVG
5	1.5420	30.81	10.30	41.11	56.00	-14.89	QP
6	1.5420	23.97	10.30	34.27	46.00	-11.73	AVG
7	2.0740	31.15	10.30	41.45	56.00	-14.55	QP
8	2.0740	19.48	10.30	29.78	46.00	-16.22	AVG
9	5.0540	25.81	10.46	36.27	60.00	-23.73	QP
10	5.0540	13.35	10.46	23.81	50.00	-26.19	AVG
11	21.4380	21.09	12.82	33.91	60.00	-26.09	QP
12	21.4380	8.41	12.82	21.23	50.00	-28.77	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

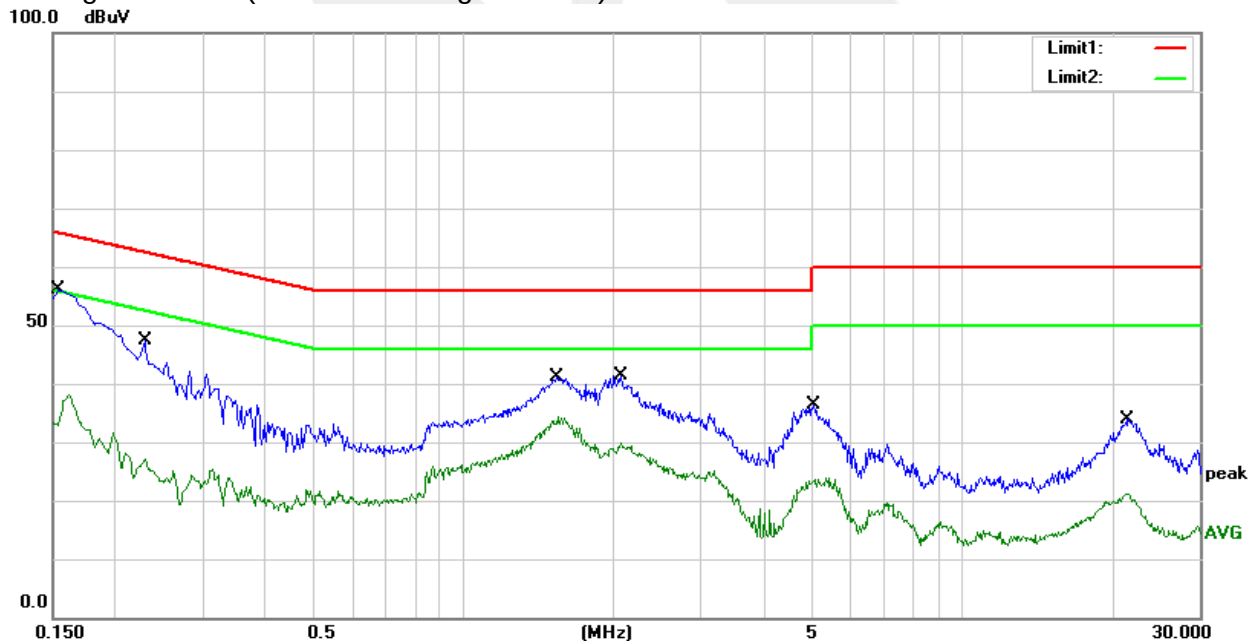



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.



In case the emission fall within the restricted band specified on 15.209 limit in the followed

. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:

(a) If the equipment operates below 10 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

Particular attention should be paid to harmonics and sub-harmonics of the carrier frequency, as well as to those frequencies removed from the carrier by multiples of the oscillator frequency.

Radiation at the frequencies of multiplier stages should also be checked.

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

When limits are expressed in absolute terms, compliance with the emission limits below 1000 MHz shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limits can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.

Above 1000 MHz, compliance with the emission limits shall be demonstrated using an average detector with a minimum resolution bandwidth of 1 MHz.

In case the emission fall within the restricted band specified on 15.209 limit in the followed

1. The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

The field strength limits shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

2. Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in 15.209, whichever is less stringent.

NOTE:

(1)The limit for radiated test was performed according to 15.209.

(2)Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0



6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

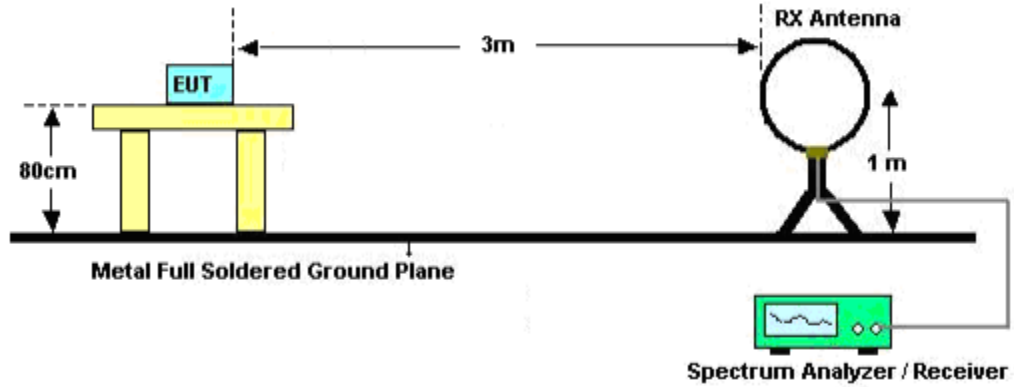

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

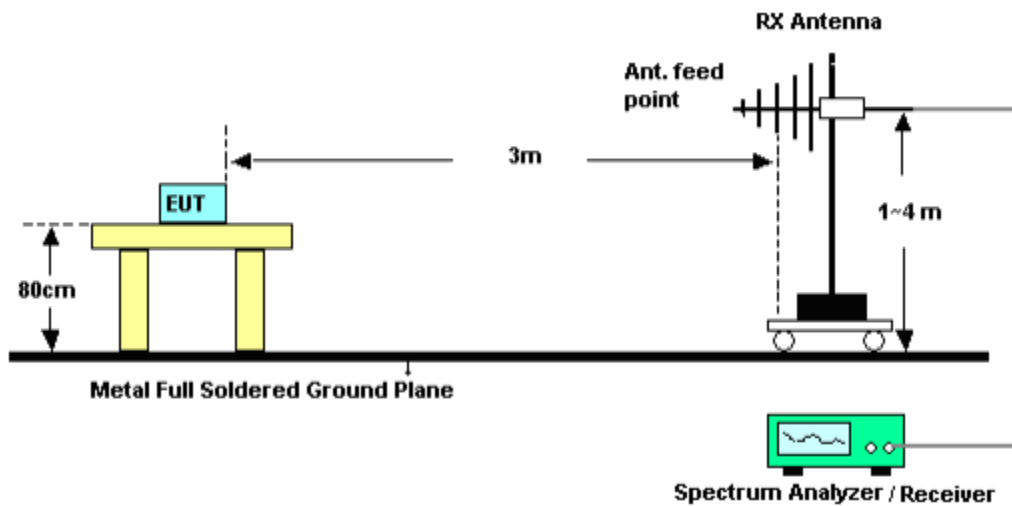

(C) Radiated Emission Test-Up Frequency Above 1GHz

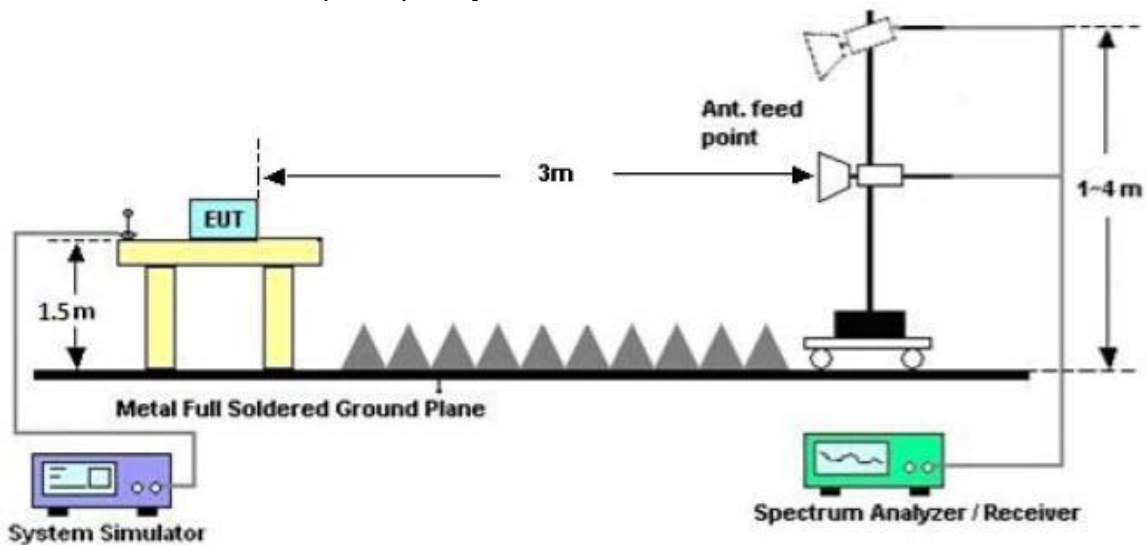



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\text{Margin} = \text{PL} - \text{PK L}$ or $\text{AL} - \text{AV L}$; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86





3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Polarization:	---
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

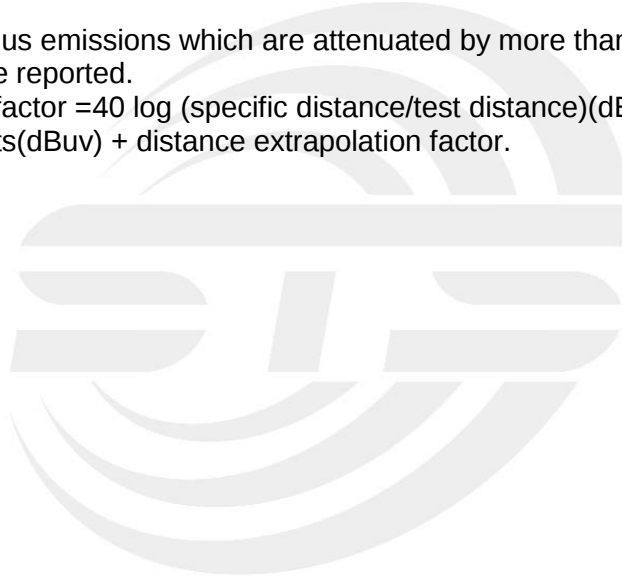




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	171.6200	51.27	-19.87	31.40	43.50	-12.10	peak
2	295.7800	43.70	-14.95	28.75	46.00	-17.25	peak
3	549.9200	29.03	-5.78	23.25	46.00	-22.75	peak
4	774.9600	29.10	-2.28	26.82	46.00	-19.18	peak
5	957.3200	29.43	1.72	31.15	46.00	-14.85	peak
6	991.2700	30.06	2.05	32.11	54.00	-21.89	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

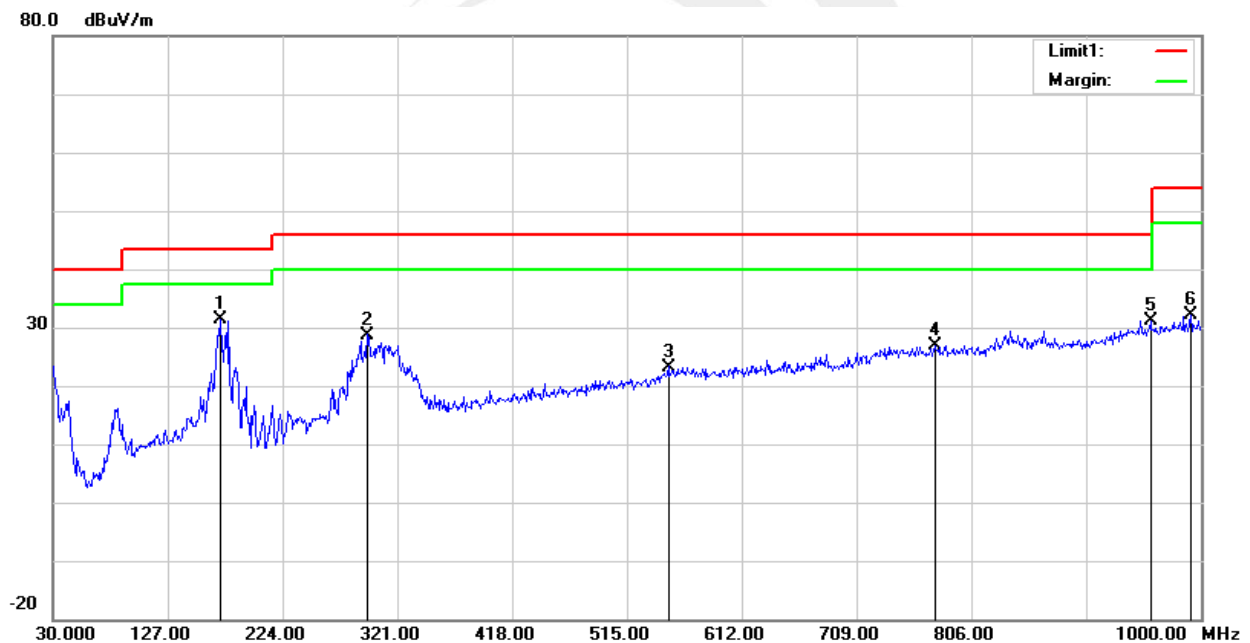




Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	40.46	-13.35	27.11	40.00	-12.89	peak
2	83.3500	43.99	-22.52	21.47	40.00	-18.53	peak
3	280.2600	38.73	-15.60	23.13	46.00	-22.87	peak
4	578.0500	30.05	-5.73	24.32	46.00	-21.68	peak
5	820.5500	29.90	-1.90	28.00	46.00	-18.00	peak
6	982.5400	28.73	2.52	31.25	54.00	-22.75	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

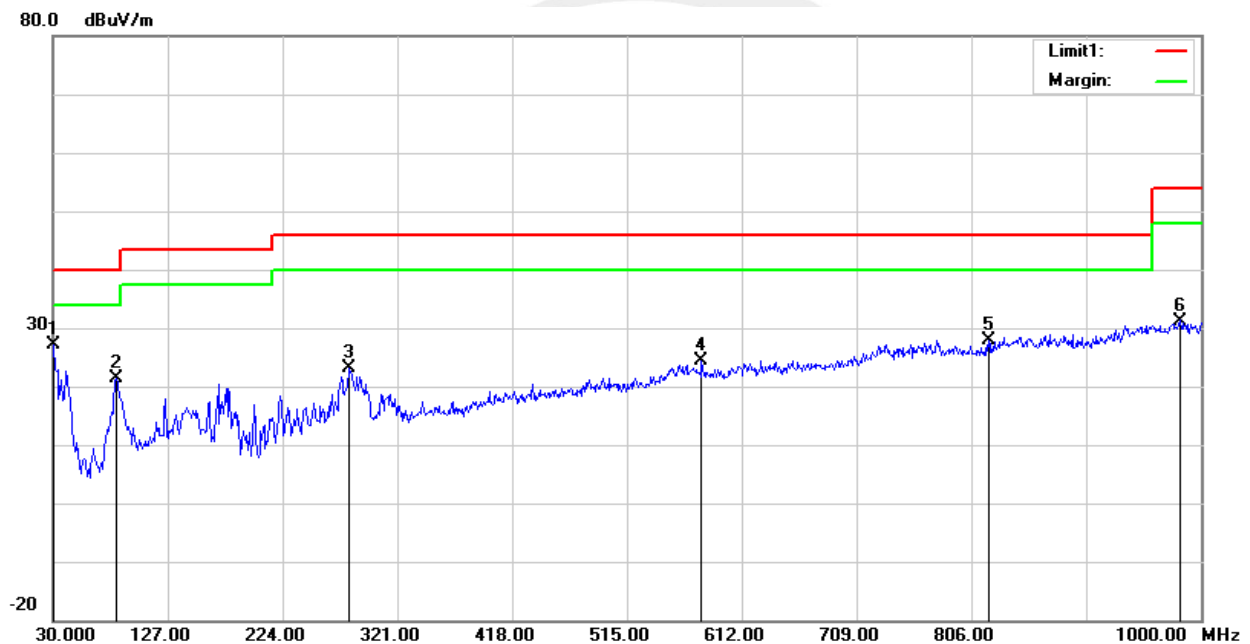



Above 1G Radiation Spurious

2403MHz

PK

Frequency (MHz)	Meter Reading (dBμV/m)	Detector (PK/QP/AV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna Polar (H/V)
								Limit (dBμV/m)	Margin (dB)	
4806.10	67.17	PK	50.33	8.84	31.22	-10.27	56.90	74	-17.10	H
4806.10	66.17	PK	50.33	8.84	31.22	-10.27	55.90	74	-18.10	V
7209.18	64.39	PK	55.48	9.31	34.05	-12.12	52.27	74	-21.73	H
7209.18	62.79	PK	55.48	9.31	34.05	-12.12	50.67	74	-23.33	V
9611.97	67.34	PK	59.13	9.89	36.99	-12.25	55.09	74	-18.91	H
9611.97	66.23	PK	59.13	9.89	36.99	-12.25	53.98	74	-20.02	V

AV

Frequency (MHz)	PK Reading (dBμV/m)	Duty cycle factor (dB)	AV Reading (dBμV/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna Polar (H/V)
						Limit (dBμV/m)	Margin (dB)	
4806.10	67.17	-5.35	61.82	-10.27	51.55	54.00	-2.45	H
4806.10	66.17	-5.35	60.82	-10.27	50.55	54.00	-3.45	V
7209.18	64.39	-5.35	59.04	-12.12	46.92	54.00	-7.08	H
7209.18	62.79	-5.35	57.44	-12.12	45.32	54.00	-8.68	V
9611.97	67.34	-5.35	61.99	-12.25	49.74	54.00	-4.26	H
9611.97	66.23	-5.35	60.88	-12.25	48.63	54.00	-5.37	V

AV = Peak +20Log10(duty cycle factor) =PK+(-5.35)

2441MHz

PK

Frequency (MHz)	Meter Reading (dBμV/m)	Detector (PK/QP/AV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna Polar (H/V)
								Limit (dBμV/m)	Margin (dB)	
4882.10	67.23	PK	50.33	8.84	31.22	-10.27	56.96	74	-17.04	H
4882.10	66.29	PK	50.33	8.84	31.22	-10.27	56.02	74	-17.98	V
7323.04	64.31	PK	55.48	9.31	34.05	-12.12	52.19	74	-21.81	H
7323.04	62.47	PK	55.48	9.31	34.05	-12.12	50.35	74	-23.65	V
9763.93	67.52	PK	59.13	9.89	36.99	-12.25	55.27	74	-18.73	H
9763.93	66.38	PK	59.13	9.89	36.99	-12.25	54.13	74	-19.87	V

AV

Frequency (MHz)	PK Reading (dBμV/m)	Duty cycle factor (dB)	AV Reading (dBμV/m)	Orrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.209/205		RX Antenna Polar (H/V)
						Limit (dBμV/m)	Margin (dB)	
4882.10	67.23	-5.35	61.88	-10.27	51.61	54.00	-2.39	H
4882.10	66.29	-5.35	60.94	-10.27	50.67	54.00	-3.33	V
7323.04	64.31	-5.35	58.96	-12.12	46.84	54.00	-7.16	H
7323.04	62.47	-5.35	57.12	-12.12	45.00	54.00	-9.00	V
9763.93	67.52	-5.35	62.17	-12.25	49.92	54.00	-4.08	H
9763.93	66.38	-5.35	61.03	-12.25	48.78	54.00	-5.22	V

AV = Peak +20Log10(duty cycle factor) =PK+(-5.35)

**2480MHz
PK**

Frequency	Meter Reading	Detector	Amplifier	Loss	Antenna Factor	Orrected Factor	Corrected Amplitude	FCC Part 15.249/15.209/205		RX Antenna Polar
								Limit	Margin	
(MHz)	(dBμV/m)	(PK/QP/AV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(H/V)
4960.15	67.45	PK	50.33	8.84	31.22	-10.27	57.18	74	-16.82	H
4960.15	66.61	PK	50.33	8.84	31.22	-10.27	56.34	74	-17.66	V
7439.98	64.39	PK	55.48	9.31	34.05	-12.12	52.27	74	-21.73	H
7439.98	62.69	PK	55.48	9.31	34.05	-12.12	50.57	74	-23.43	V
9920.16	67.43	PK	59.13	9.89	36.99	-12.25	55.18	74	-18.82	H
9920.16	66.53	PK	59.13	9.89	36.99	-12.25	54.28	74	-19.72	V


Frequency	PK Reading	Duty cycle factor	AV Reading	Orrected Factor	Corrected Amplitude	FCC Part 15.249/15.209/205		RX Antenna Polar
						Limit	Margin	
(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(H/V)
4960.15	67.45	-5.35	62.10	-10.27	51.83	54.00	-2.17	H
4960.15	66.61	-5.35	61.26	-10.27	50.99	54.00	-3.01	V
7439.98	64.39	-5.35	59.04	-12.12	46.92	54.00	-7.08	H
7439.98	62.69	-5.35	57.34	-12.12	45.22	54.00	-8.78	V
9920.16	67.43	-5.35	62.08	-12.25	49.83	54.00	-4.17	H
9920.16	66.53	-5.35	61.18	-12.25	48.93	54.00	-5.07	V

AV = Peak +20Log10(duty cycle factor) =PK+(-5.35)





Duty cycle

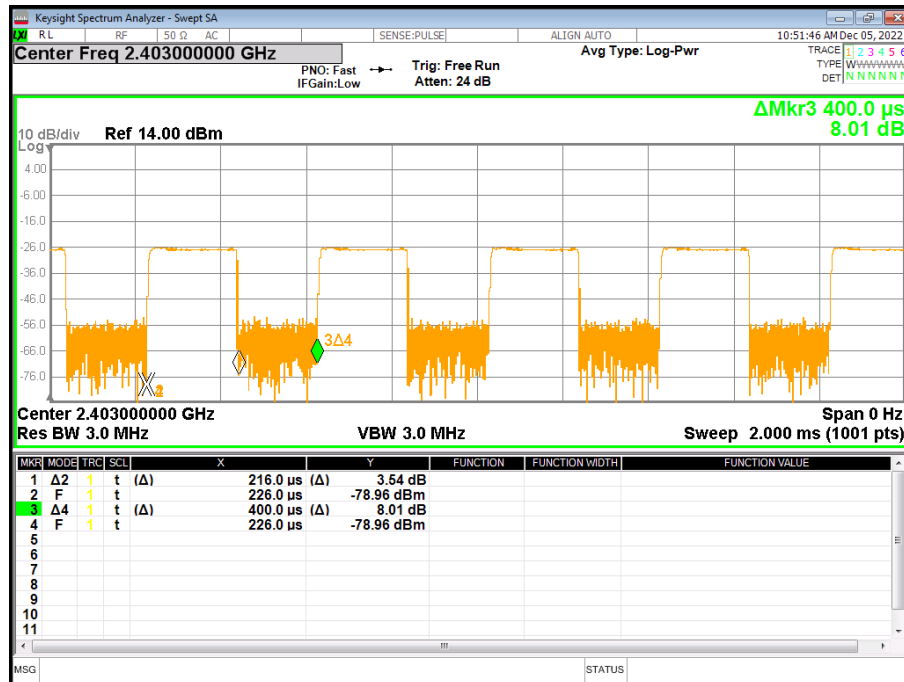


Ton (μs)	Tp (μs)	Duty Factor
216	400	-5.35

Note: Duty Factor=20*LOG10(1/(Ton/Tp))



(Radiation Band edge)

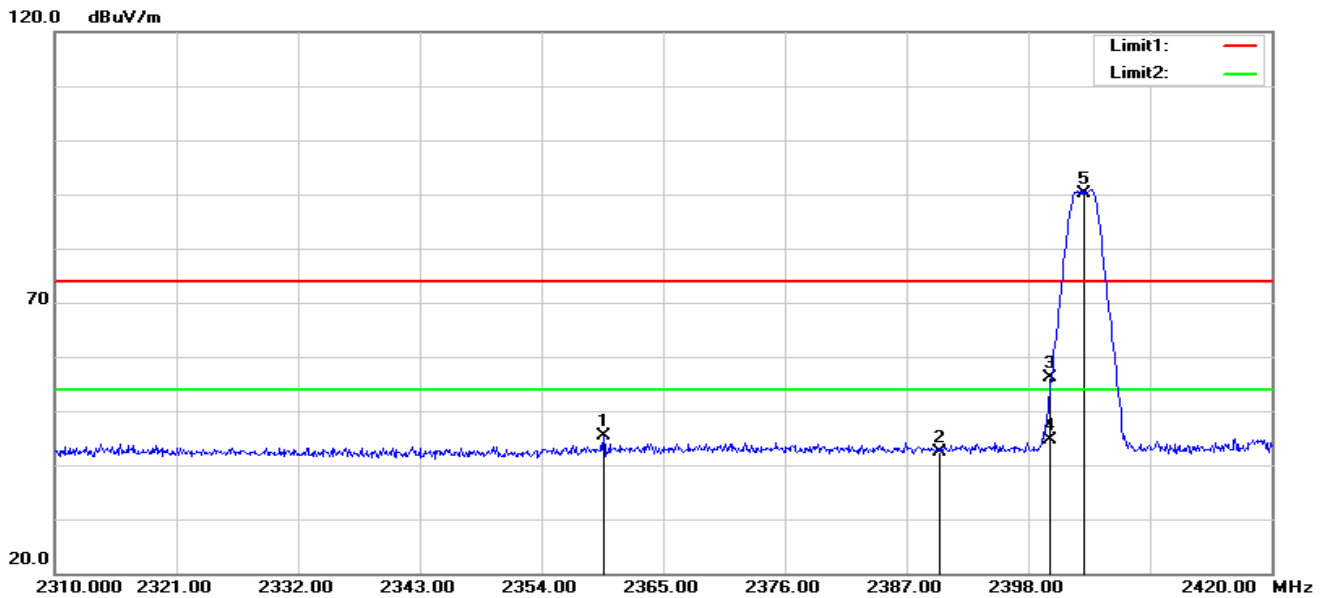Low channel
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.610	41.51	3.88	45.39	74.00	-28.61	peak
2	2390.000	38.13	4.34	42.47	74.00	-31.53	peak
3	2400.000	51.55	4.49	56.04	74.00	-17.96	peak
4	2400.000	40.19	4.49	44.68	54.00	-9.32	AVG

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5	2403.000	85.68	4.49	-	90.17	114	-23.83	peak
6	2403.000	85.68	4.49	-5.35	84.82	94	-9.18	AVG



Vertical

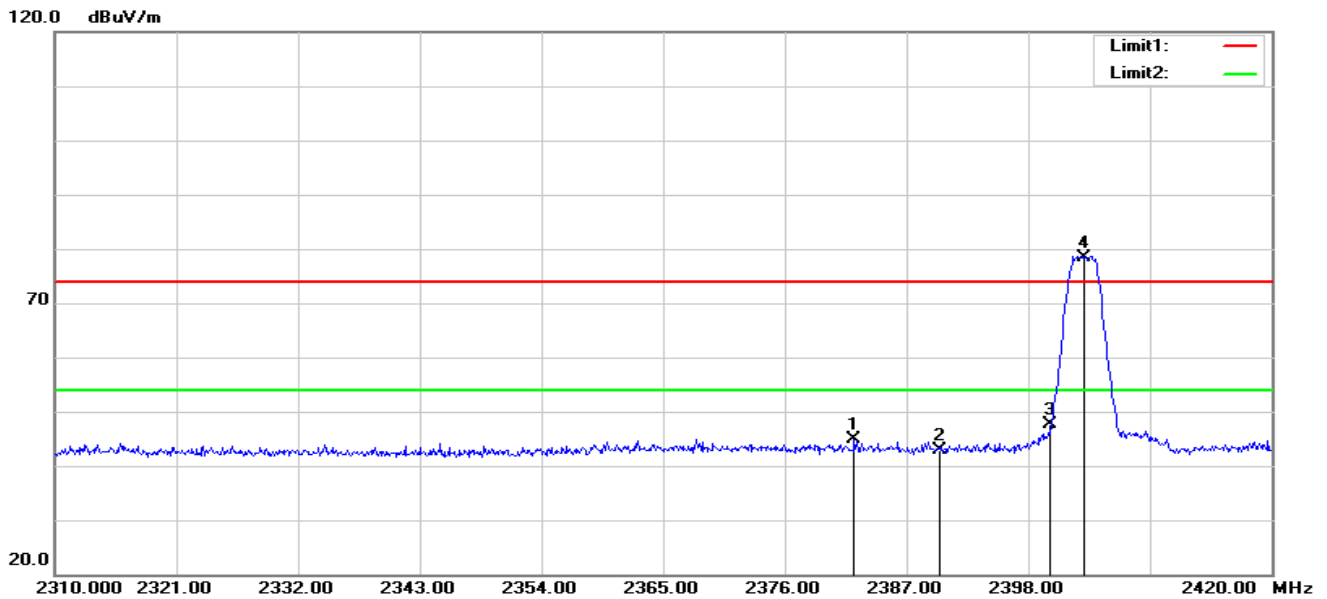


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.270	40.77	4.22	44.99	74.00	-29.01	peak
2	2390.000	38.49	4.34	42.83	74.00	-31.17	peak
3	2400.000	43.03	4.49	47.52	74.00	-26.48	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4	2403.000	73.93	4.49	-	78.42	114	-35.58	peak
5	2403.000	73.93	4.49	-5.35	73.07	94	-20.93	AVG




Mid channel Horizontal

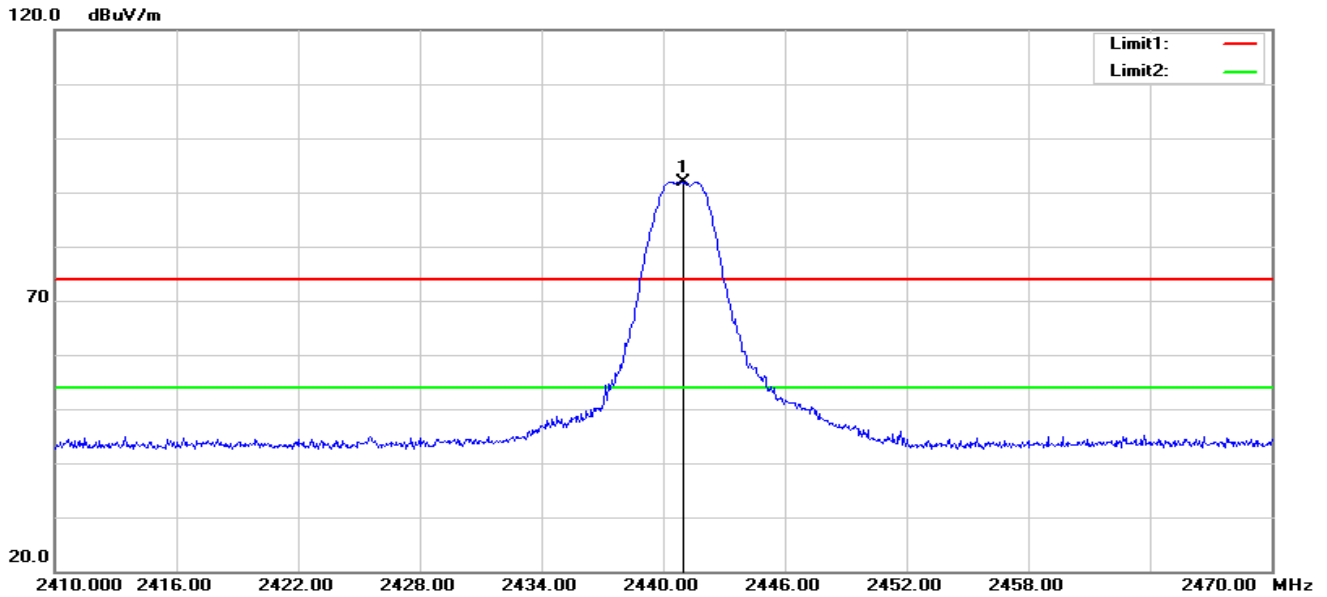

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441.000	87.42	4.52	-	91.94	114	-22.06	peak
2	2441.000	87.42	4.52	-5.35	86.59	94	-7.41	AVG


Vertical

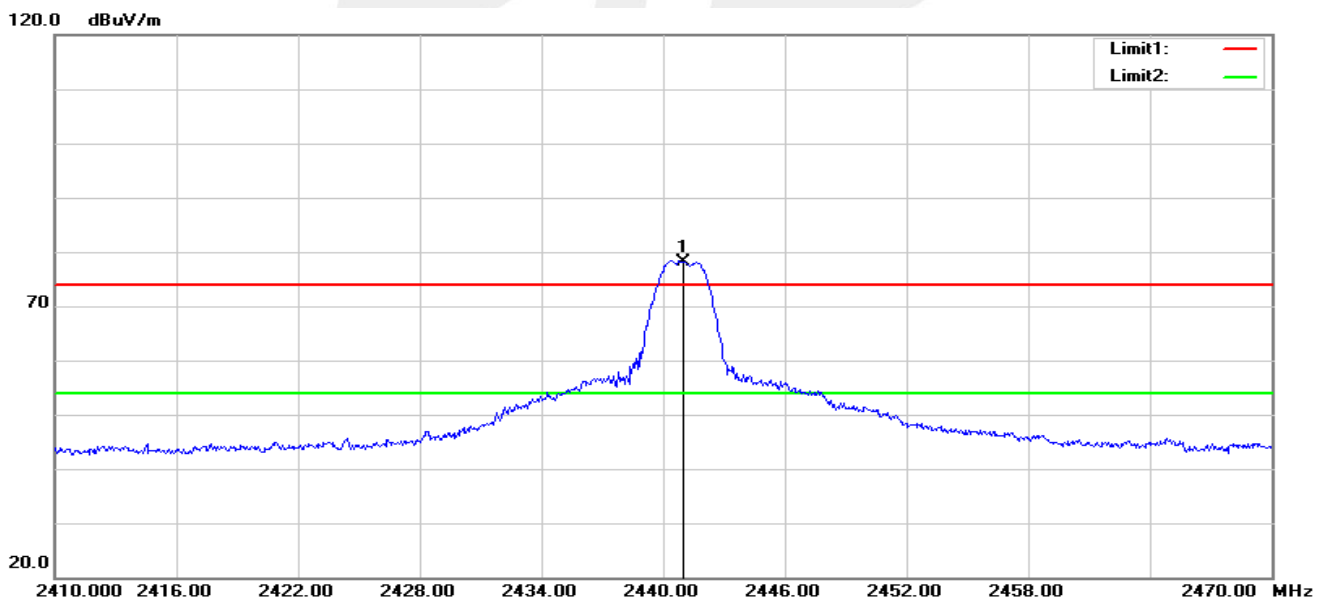

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441.000	73.71	4.52	-	78.23	114	-35.77	peak
2	2441.000	73.71	4.52	-5.35	72.88	94	-21.12	AVG



High channel Horizontal

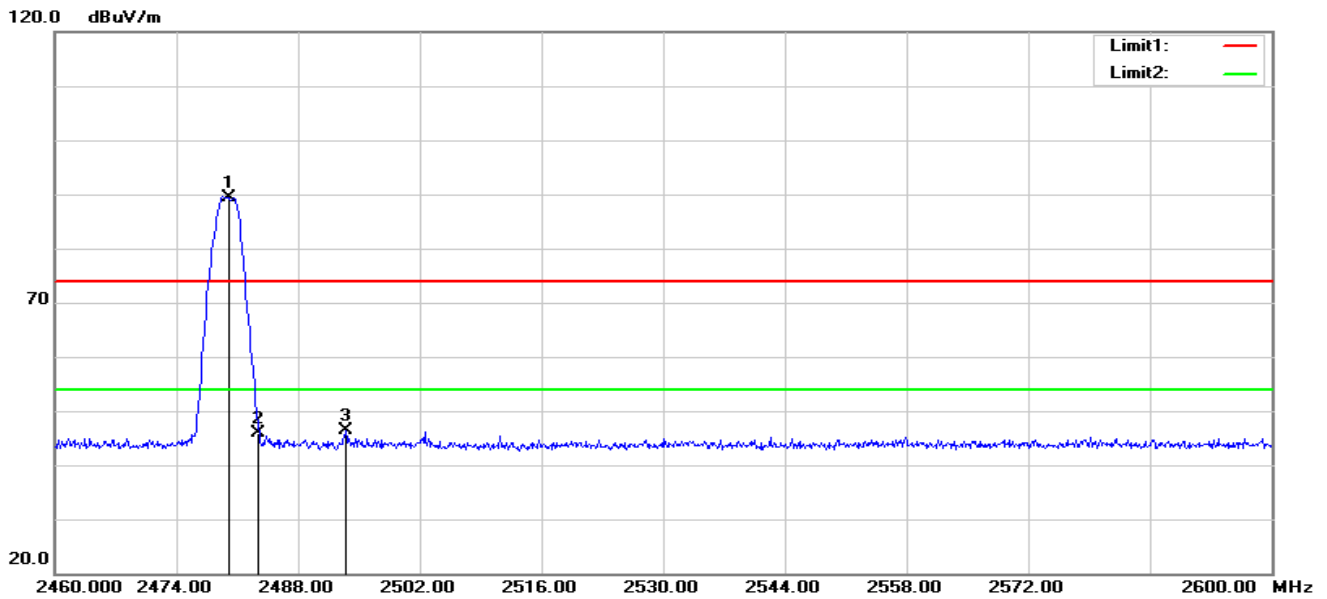


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	41.40	4.60	46.00	74.00	-28.00	peak
3	2493.460	41.76	4.64	46.40	74.00	-27.60	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	84.77	4.60	-	89.37	114	-24.63	peak
4	2480.000	84.77	4.60	-5.35	84.02	94	-9.98	AVG



Vertical

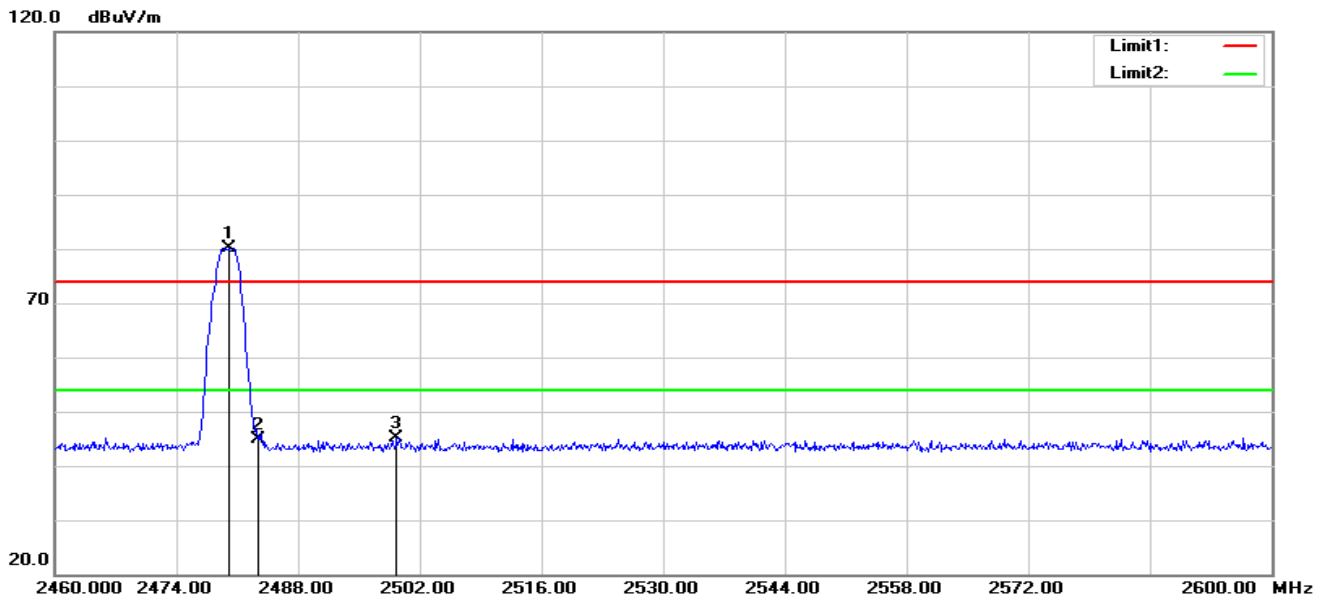

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2483.500	40.37	4.60	44.97	74.00	-29.03	peak
3	2499.340	40.53	4.65	45.18	74.00	-28.82	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	75.51	4.60	-	80.11	114	-33.89	peak
4	2480.000	75.51	4.60	-5.35	74.76	94	-19.24	AVG

Note: AV result=Reading+Correct Factor+Duty cycle Factor



4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting : RBW= 1% to 5% OBW, VBW $\geq$ RBW, Sweep time = Auto.

4.2 TEST SETUP



4.3 EUT OPERATION CONDITIONS

TX mode.






4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 3.7V		


Test Channel	Frequency(MHz)	20 dB Bandwidth(MHz)	99% Bandwidth(MHz)
CH01	2403	1.882	2.0989
CH03	2441	1.889	2.0953
CH16	2480	1.823	2.1303

Low Channel

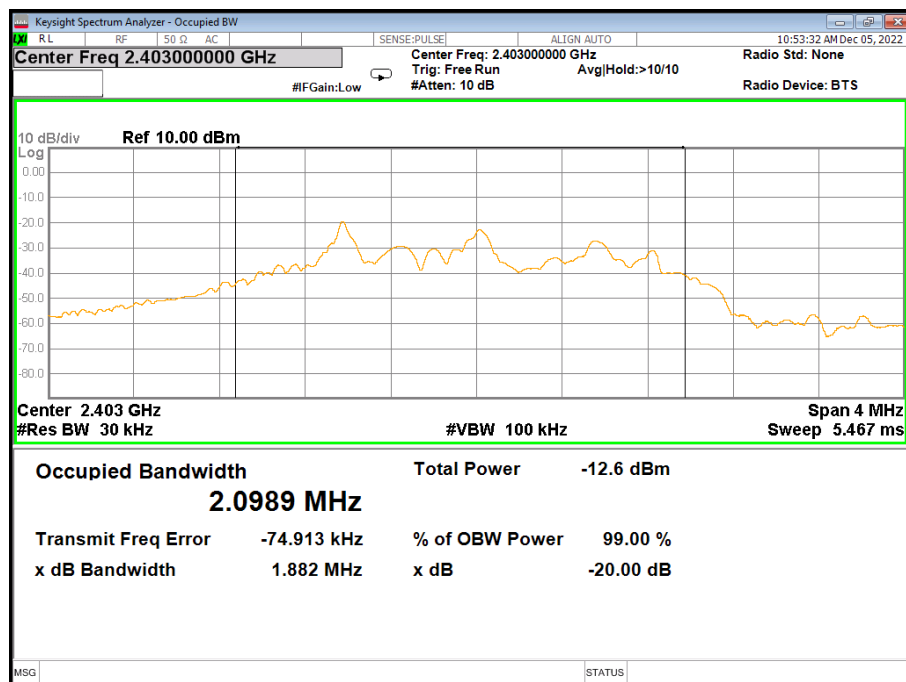




Mid Channel

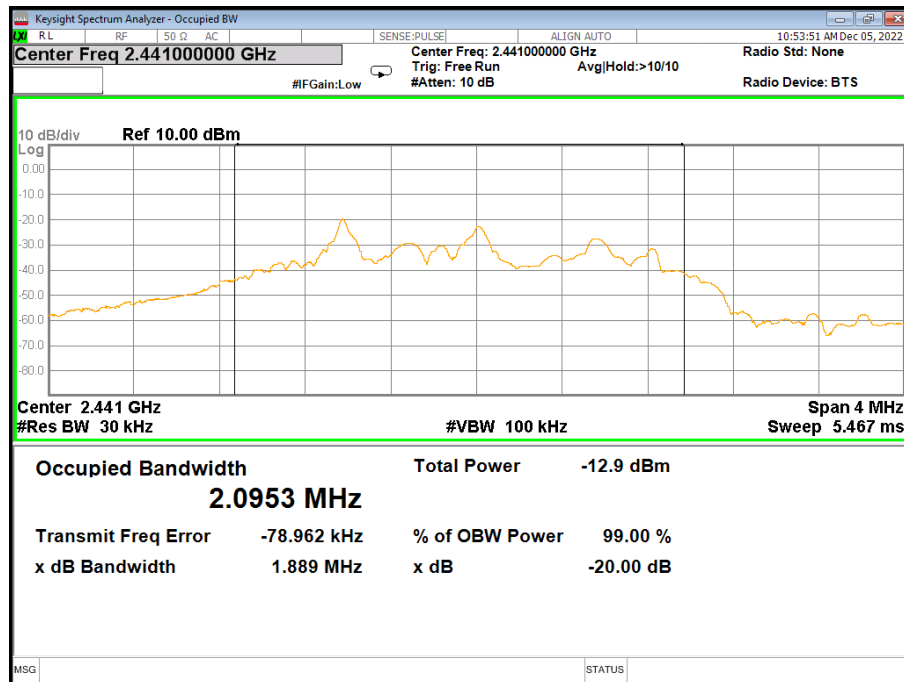

High Channel

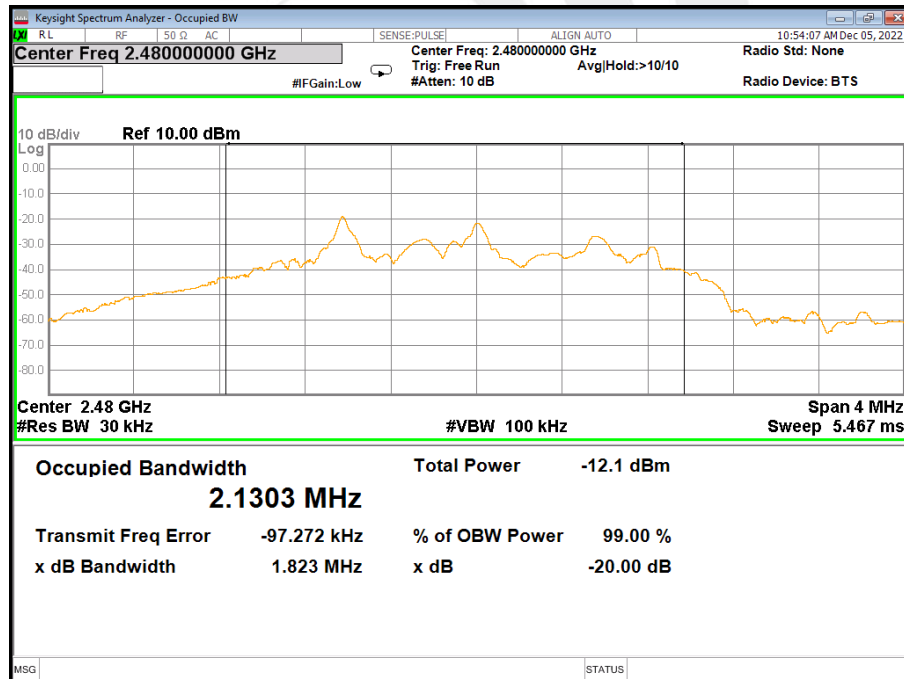



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It conforms to the standard requirements.





APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

