

 MOTOROLA SOLUTIONS	    CERTIFICATE 2518.08 SMM 825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.A																																
<table><tr><td>Date/s Tested</td><td>: 03-DEC-2024 - 06-DEC-2024</td></tr><tr><td>Report Issue Date</td><td>: 11-DEC-2024</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: GEDDIE, CALEB</td></tr><tr><td>Product Type</td><td>: Hand-held</td></tr><tr><td>Product Marketing Version (PMN)</td><td>: APX900</td></tr><tr><td>Hardware Version Identification Number (HVIN)</td><td>: H92KDH9PW7AN</td></tr><tr><td>Frequency Band</td><td>: 136-174 MHz</td></tr><tr><td>Max RF Output Power</td><td>: 5.9 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version Identification Number (FVIN)</td><td>: D32.50.67</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 6</td><td>PASS</td></tr></table>		Date/s Tested	: 03-DEC-2024 - 06-DEC-2024	Report Issue Date	: 11-DEC-2024	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: GEDDIE, CALEB	Product Type	: Hand-held	Product Marketing Version (PMN)	: APX900	Hardware Version Identification Number (HVIN)	: H92KDH9PW7AN	Frequency Band	: 136-174 MHz	Max RF Output Power	: 5.9 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version Identification Number (FVIN)	: D32.50.67	(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 6	PASS
Date/s Tested	: 03-DEC-2024 - 06-DEC-2024																																
Report Issue Date	: 11-DEC-2024																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: GEDDIE, CALEB																																
Product Type	: Hand-held																																
Product Marketing Version (PMN)	: APX900																																
Hardware Version Identification Number (HVIN)	: H92KDH9PW7AN																																
Frequency Band	: 136-174 MHz																																
Max RF Output Power	: 5.9 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version Identification Number (FVIN)	: D32.50.67																																
(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 6	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Farah Nur Arina Test Personnel	Approved Signatory: Maheshvaran A/L Rajagopal Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	9
5.1. Transmitter Test Conditions	9
6.0 Transmitter Test Parameters	10
6.1. RF Output Power	10
6.1.1. Test Setup	10
6.1.2. Test Result	10
6.2. Frequency Stability	11
6.2.1. Test Setup	11
6.2.2. Test Result	11
6.2.3. Test Limit.....	11
6.3. Modulation Characteristics	12
6.3.1. Test Setup	12
6.3.2. Test Result	12
6.3.3. Test Limit.....	12
6.4. Modulation Limiting.....	13
6.4.1. Test Setup	13
6.4.2. Test Result	13
6.4.3. Test Limit.....	13
6.5. Occupied Bandwidth.....	14
6.5.1. Test Setup (Analog).....	14
6.5.2. Test Result (Analog).....	14
6.5.3. Test Setup (Digital).....	15
6.5.4. Test Result (Digital).....	15
6.5.5. Test Limit.....	15
6.6. Band Edge Conducted Spurious Emission (Part 22)	16
6.6.1. Test Setup (Analog)	16
6.6.2. Test Result (Analog).....	16
6.6.3. Test Setup (Digital).....	17
6.6.4. Test Result (Digital).....	17
6.6.5. Test Limit.....	17
6.7. Transient Frequency Behavior	18
6.7.1. Test Setup	18
6.7.2. Test Result	18
6.7.3. Test Limit.....	19
6.8. Adjacent Channel Power.....	20

6.8.1.	Test Setup (Analog)	20
6.8.2.	Test Result	20
6.8.3.	Test Setup (Digital).....	21
6.8.4.	Test Result	21
6.8.5.	Test Limit.....	22
6.9.	Conducted Spurious Emission	24
6.9.1.	Test Setup	24
6.9.2.	Test Result (Analog).....	25
6.9.3.	Test Result (Digital).....	25
6.9.4.	Test Limit.....	43
6.10.	Radiated Spurious Emission	44
6.10.1.	Test Setup	44
6.10.2.	Test Result (Analog).....	45
6.10.3.	Test Result (Digital).....	51
6.10.4.	Test Limit.....	62
6.11.	Effective Radiated Power (ERP)	64
6.11.1.	Test Setup	64
6.11.2.	Test Result	64
6.11.3.	Test Limit.....	64
6.12.	GNSS (EIRP for 1559 - 1610MHz).....	65
6.12.1.	Test Setup	65
6.12.1.	Test Result	65
6.12.2.	Test Limit.....	65

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	08-Dec-2024	Farah

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BELIZE NON-TIA HIGH CAP LV LI- ION BATTERY 2950M3000T	MOTOROLA	PMNN4493A

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046(a), 22.565(f), 74.461, 80.215	RSS-119	RF Power Output	Pass		837TAFH448
2.1055, 22.355, 74.464, 80.209	RSS-119	Frequency Stability	NA		
2.1047	-	Audio Frequency Response	NA		
2.1047	-	Audio Low Pass Filter Response	NA		
2.1047, 74.463, 80.213	-	Modulation limiting	NA		
2.1049, 22.359, 90.21, 74.462, 80.211(b), (c)	RSS-119	Occupied Bandwidth	NA		
2.1051, 22.359 (a), (b)	-	Band Edge Conducted Spurious Emission	NA		
90.214	RSS-119	Transient Frequency Behavior	NA		
90.543(a), (b)	RSS-119	Adjacent Channel Power	NA		
2.1051, 22.359, 90.210 74.462(c), 80.211(c)	RSS-119	Conducted Spurious Emissions	Pass	Worst case: -47.98 dBm	837TAFH448
2.1051, 22.359, 74.462(c), 80.211(c)	RSS-119	Radiated Spurious Emission	Pass	Worst case: -58.4631 dBm, margin: 38.4631 dB (NF)	837TAFH446
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

NOTE1: Selection of test parameters, the report contain a limited number of parameters deemed to be influenced by the relevant design changes, as agreed with the applicant.

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: FCC_Analog_v2.5.0)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	04-Mar-24	04-Mar-25
POWER SUPPLY	6031A	2729A00711	08-Jun-24	08-Jun-25
POWER SENSOR	E4412A	MY50000141	16-Aug-24	16-Aug-25
POWER METER	E4416A	MY45101448	23-Aug-24	23-Aug-25
CXA SIGNAL ANALYZER	N9000B	MY60250581	08-Jun-24	08-Jun-25
AUDIO ANALYZER	U8903B	MY61070007	17-Aug-24	17-Aug-25
CHAMBER	SH-641	92009188	04-Mar-24	04-Mar-25
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC TRANSIENT ATE #1: (SW version: FCC Transient ATE_R1.2.1)

Not Applicable

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.06)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	Not Required	Not Required
INTERFACE BOX - FILTER	NA	CS001	Not Required	Not Required
POWER SUPPLY	6032A	2723A02219	21-Aug-24	21-Aug-25
SPECTRUM ANALYZER	E4440A	MY48250919	06-Jun-24	06-Jun-25
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

RADIATED EMISSION (CHAMBER 1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	6623A	3302A02585	30-Jul-24	30-Jul-25
SIGNAL GENERATOR	SMB 100A	181117	06-Dec-21	06-Dec-24
EMI TEST RECEIVER	ESW44	101750	08-Aug-24	07-Aug-25
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112B	2950	14-Dec-23	14-Dec-24
BILOG ANTENNA	CBL6112B	55546	05-Jun-24	05-Jun-25
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	26-Jun-24	26-Jun-25
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	13-Mar-2024	13-Mar-2025
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	Not Required	Not Required
PREAMPLIFIER	PAM-0118P	574	19-Mar-24	19-Mar-25
LOOP ANTENNA	6502	00203479	06-Mac-24	06-Mac-25
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.5			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	FM/C4FM/Phase II	138.0125, 158.5500, 161.7000, 173.9875	Farah	23.4°C, 50%RH
Frequency Stability	Max	FM/C4FM/Phase II	NA		NA
Audio Frequency Response (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Modulation limiting (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	138.0125, 158.5500, 161.7000, 173.3875, 173.9875	Farah	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	138.0125, 158.5500, 161.7000, 173.3875, 173.9875	Aiman	23.4°C, 50%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		NA

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

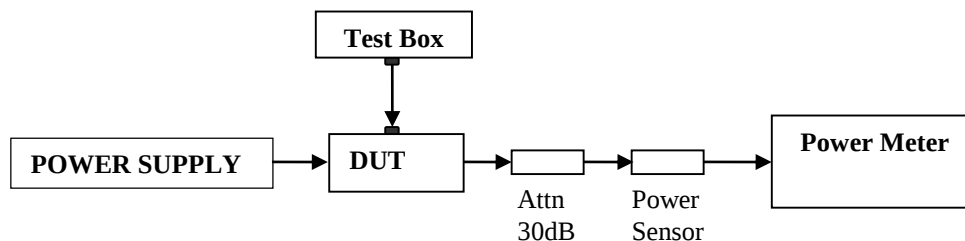


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	7.5V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
138.01250	1.00	0.78	5.76	1.68	Not for FCC review Part 80
158.55000	1.00	0.87	5.84	1.68	
161.70000	1.00	0.81	5.83	1.68	
173.98750	1.00	0.90	5.84	1.61	

6.2. Frequency Stability

6.2.1. Test Setup

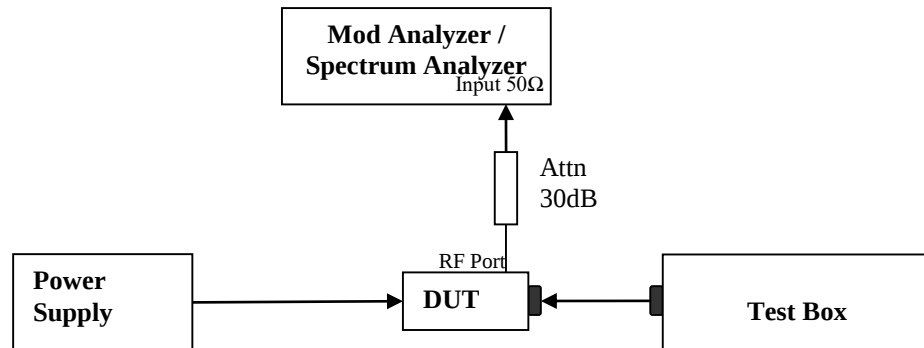

- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result Not Applicable

6.2.3. Test Limit As per manufacturer declared spec +/- 2.0ppm

6.4. Modulation Limiting

6.4.1. Test Setup

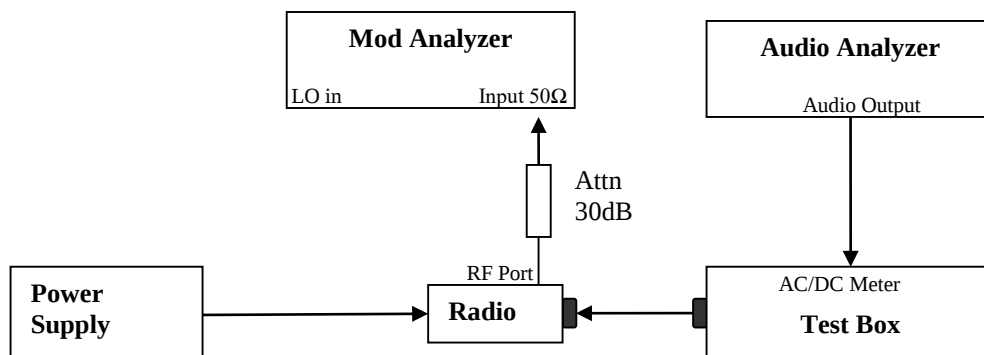

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.4.2. Test Result

Not Applicable


6.4.3. Test Limit

Modulation Limiting shall not exceed 100 percent.


6.5. Occupied Bandwidth

6.5.1. Test Setup (Analog)

A. Get Fc for reference

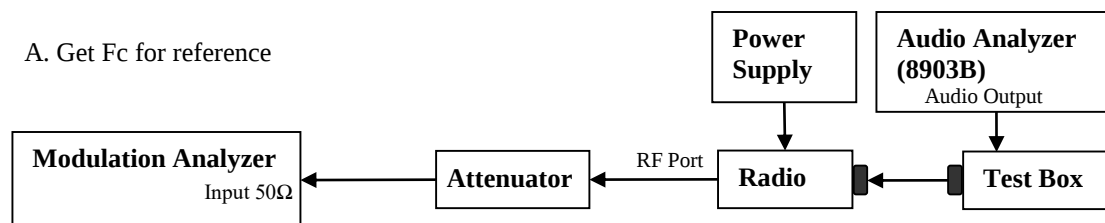

B. Testing

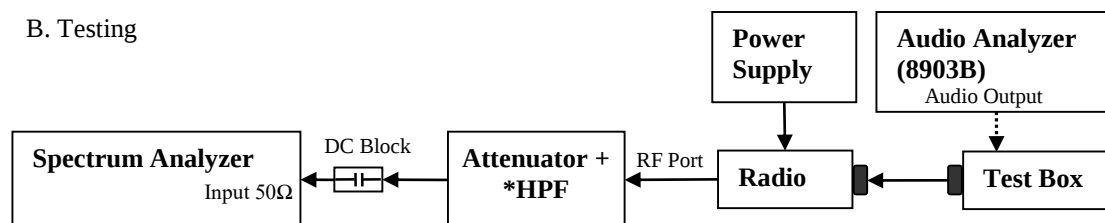

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.


* Only HPF added for Mask 80.211 measurement with attenuator.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.5.2. Test Result (Analog)

Not Applicable

6.5.3. Test Setup (Digital)

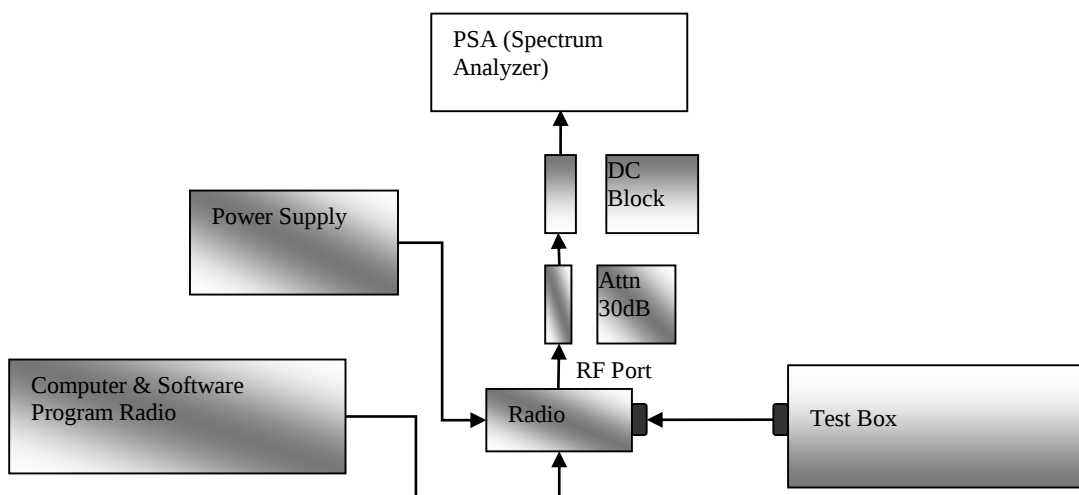

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.5.4. Test Result (Digital)

Not Applicable


6.5.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.6. Band Edge Conducted Spurious Emission (Part 22)

6.6.1. Test Setup (Analog)

A. Get Fc for reference

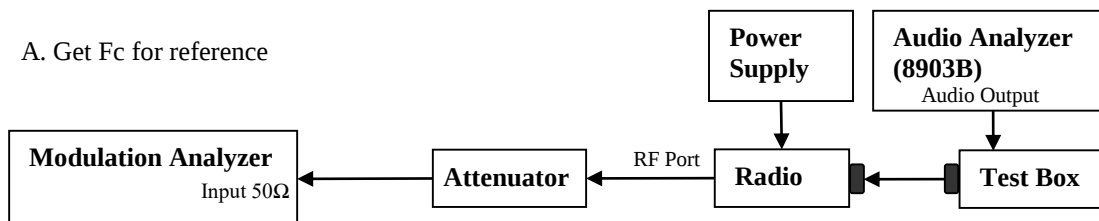

B. Testing

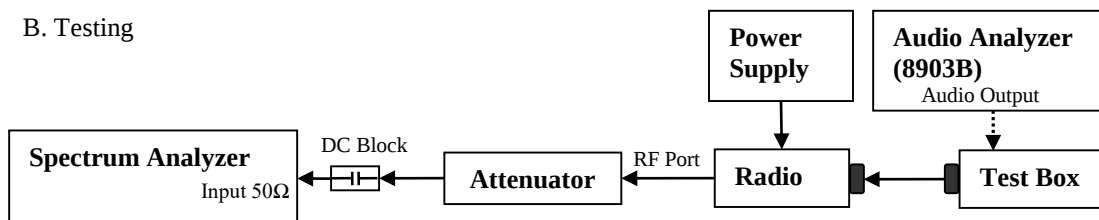


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:

- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.6.2. Test Result (Analog) **Not Applicable**

6.6.3. Test Setup (Digital)

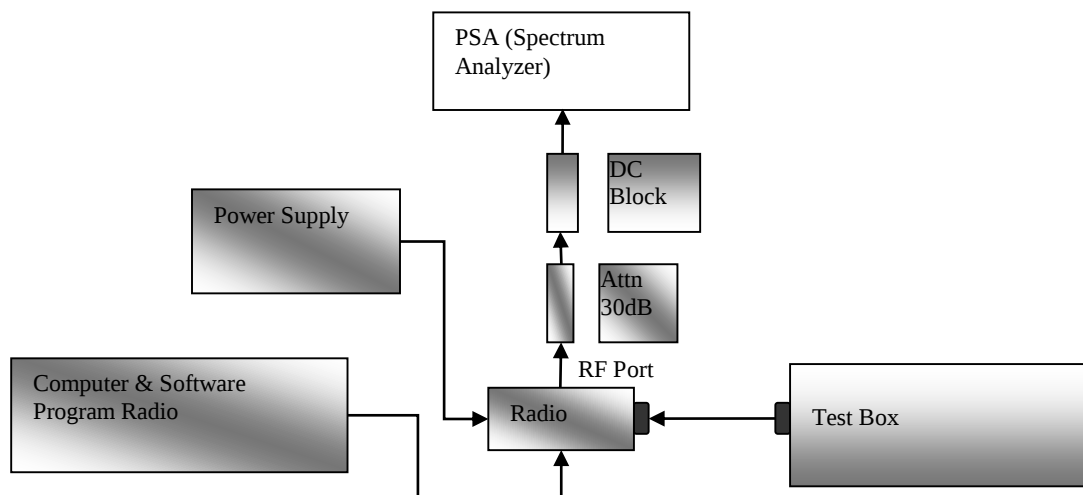

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)

Not Applicable

6.6.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.8. Adjacent Channel Power


6.8.1. Test Setup (Analog)

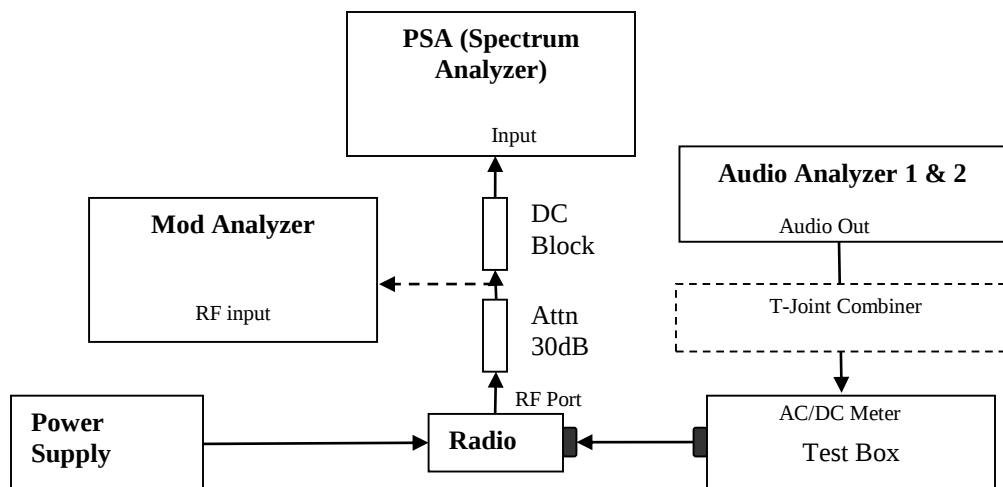

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.2. Test Result **Not Applicable**

6.8.3. Test Setup (Digital)

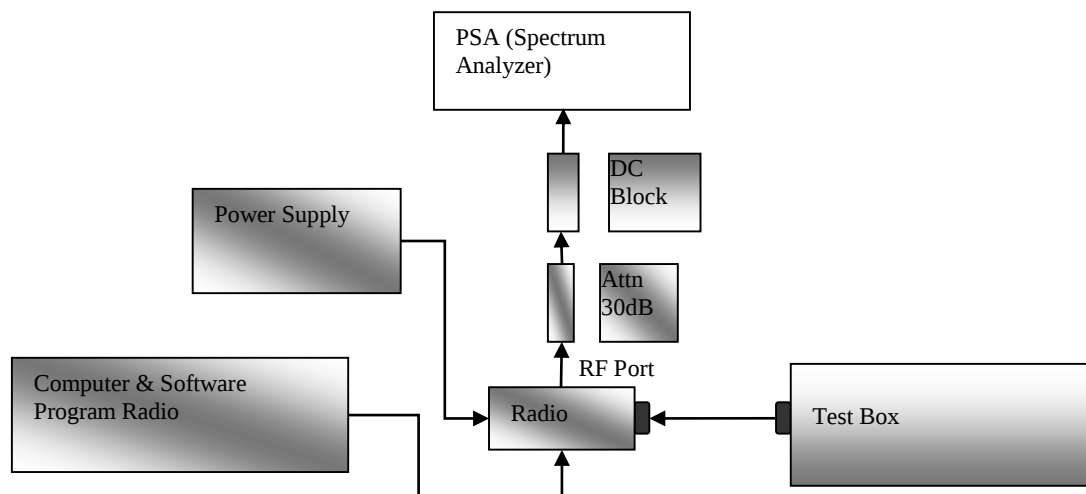

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.4. Test Result

Not Applicable

6.8.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.9. Conducted Spurious Emission

6.9.1. Test Setup

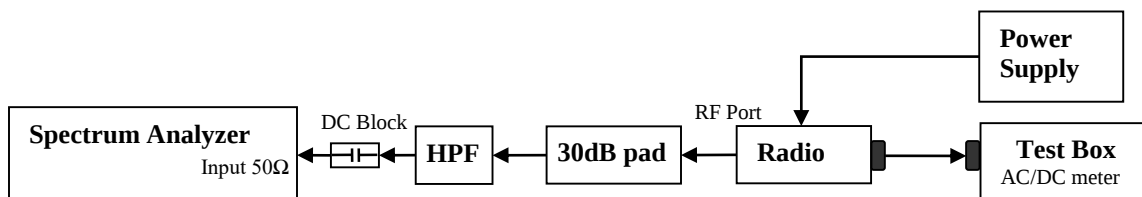


- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.

6.9.2. Test Result (Analog)


Analog: 138.0125 MHz, 25 kHz Channel Spacing, Max Power

Not for FCC review

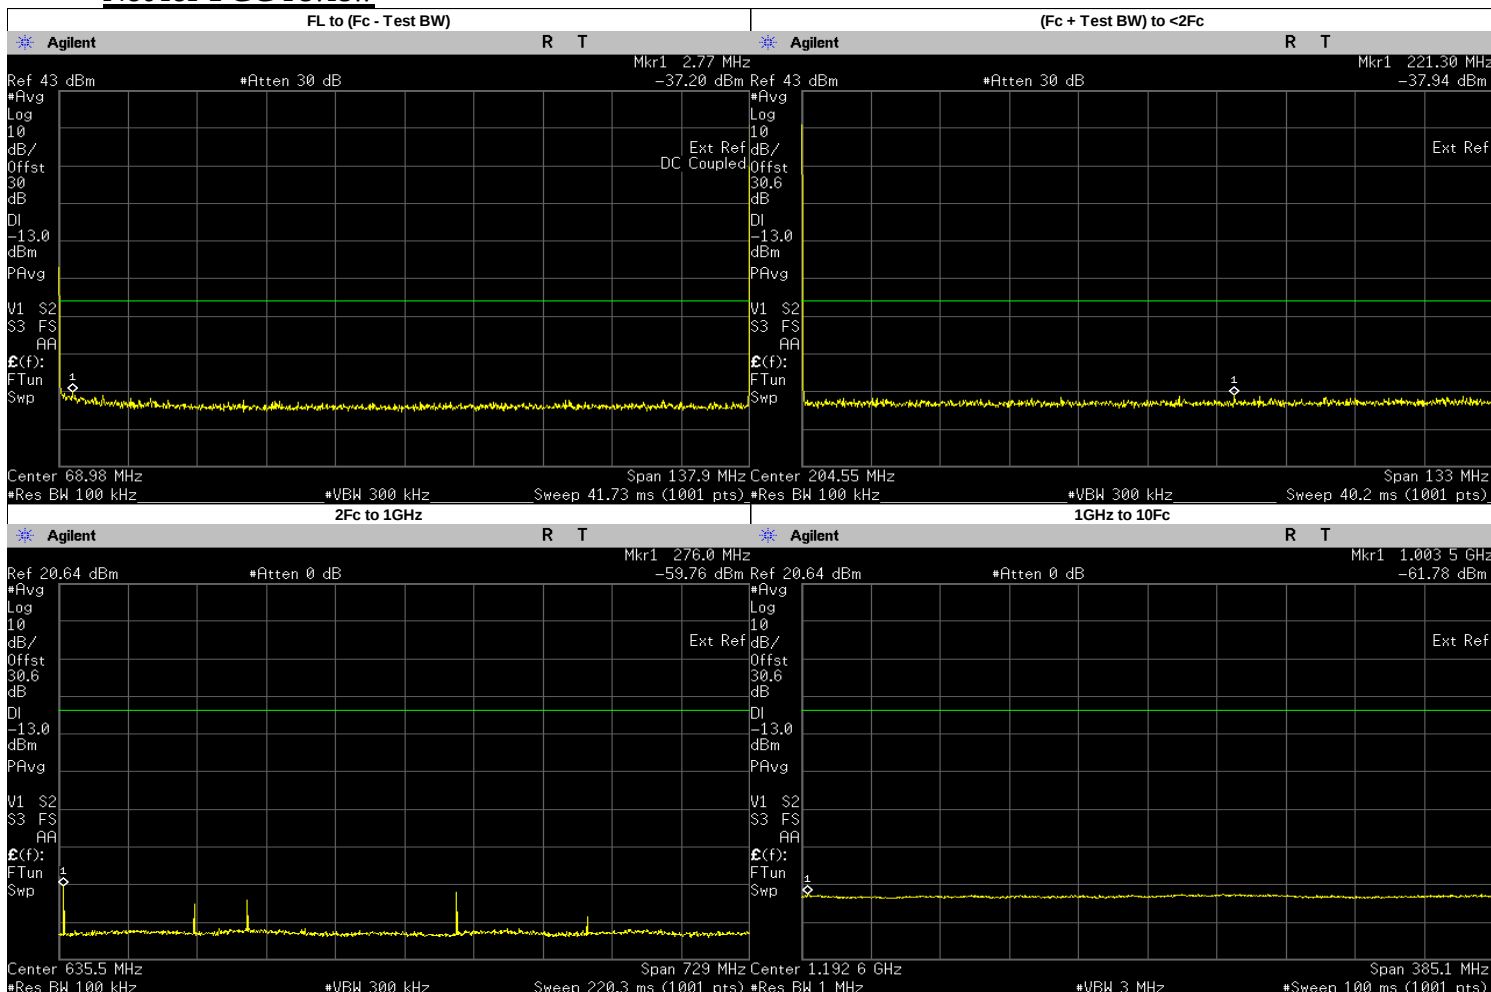


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.7700	-37.2010	-13	PASS
(Fc + Test BW) to <2Fc	221.2991	-37.9400	-13	PASS
2Fc to 1GHz	276.0250	-59.7600	-13	PASS
	414.0375	-65.8062	-13	PASS
	552.0500	-71.8826	-13	PASS
	690.0625	-63.1917	-13	PASS
	828.0750	-68.6032	-13	PASS
	966.0875	-71.7590	-13	PASS
1GHz to 10Fc	1003.4660	-61.7800	-13	PASS
	1104.1000	-62.5333	-13	PASS
	1242.1120	-62.0749	-13	PASS
	1380.1250	-62.3420	-13	PASS

**Analog: 158.5500 MHz, 25 kHz Channel Spacing, Low Power
For Part 22, 80**

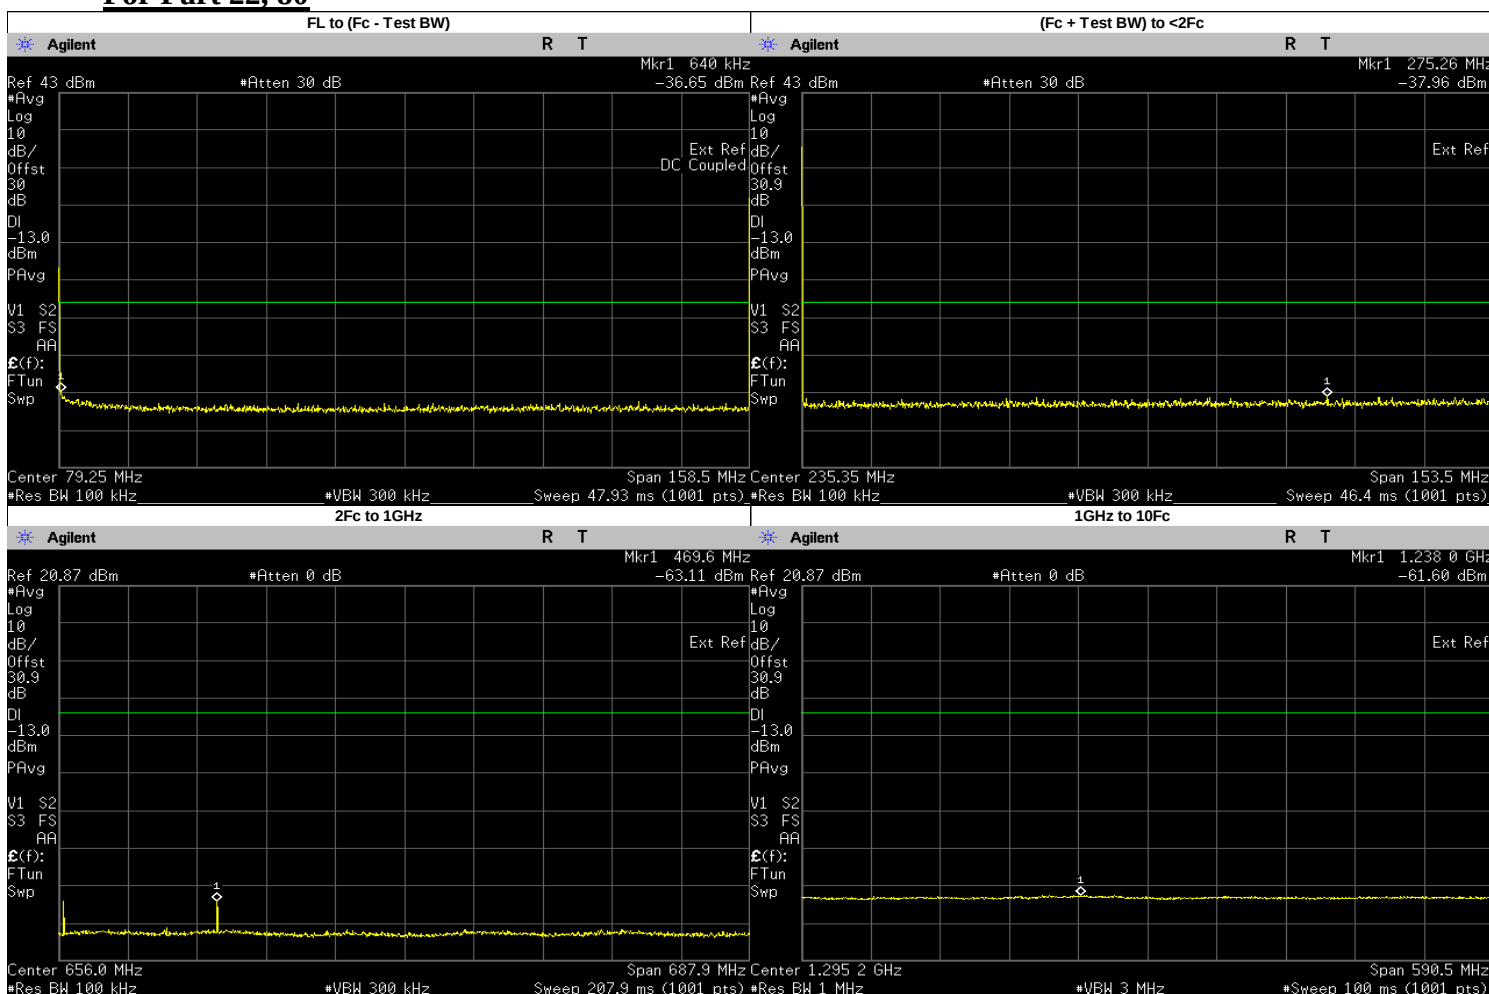


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.6400	-36.6450	-13	PASS
(Fc + Test BW) to <2Fc	275.2614	-37.9600	-13	PASS
2Fc to 1GHz	469.6291	-63.1100	-13	PASS
	317.1000	-65.5232	-13	PASS
	475.6500	-71.3354	-13	PASS
	634.2000	-71.2787	-13	PASS
	792.7500	-71.7860	-13	PASS
1GHz to 10Fc	951.3000	-72.2107	-13	PASS
	1237.9720	-61.6000	-13	PASS
	1109.8500	-62.5085	-13	PASS
	1268.4000	-61.9054	-13	PASS
	1426.9500	-62.4329	-13	PASS
	1585.5000	-62.2014	-13	PASS

**Analog: 158.5500 MHz, 25 kHz Channel Spacing, Max Power
 For Part 22, 80**

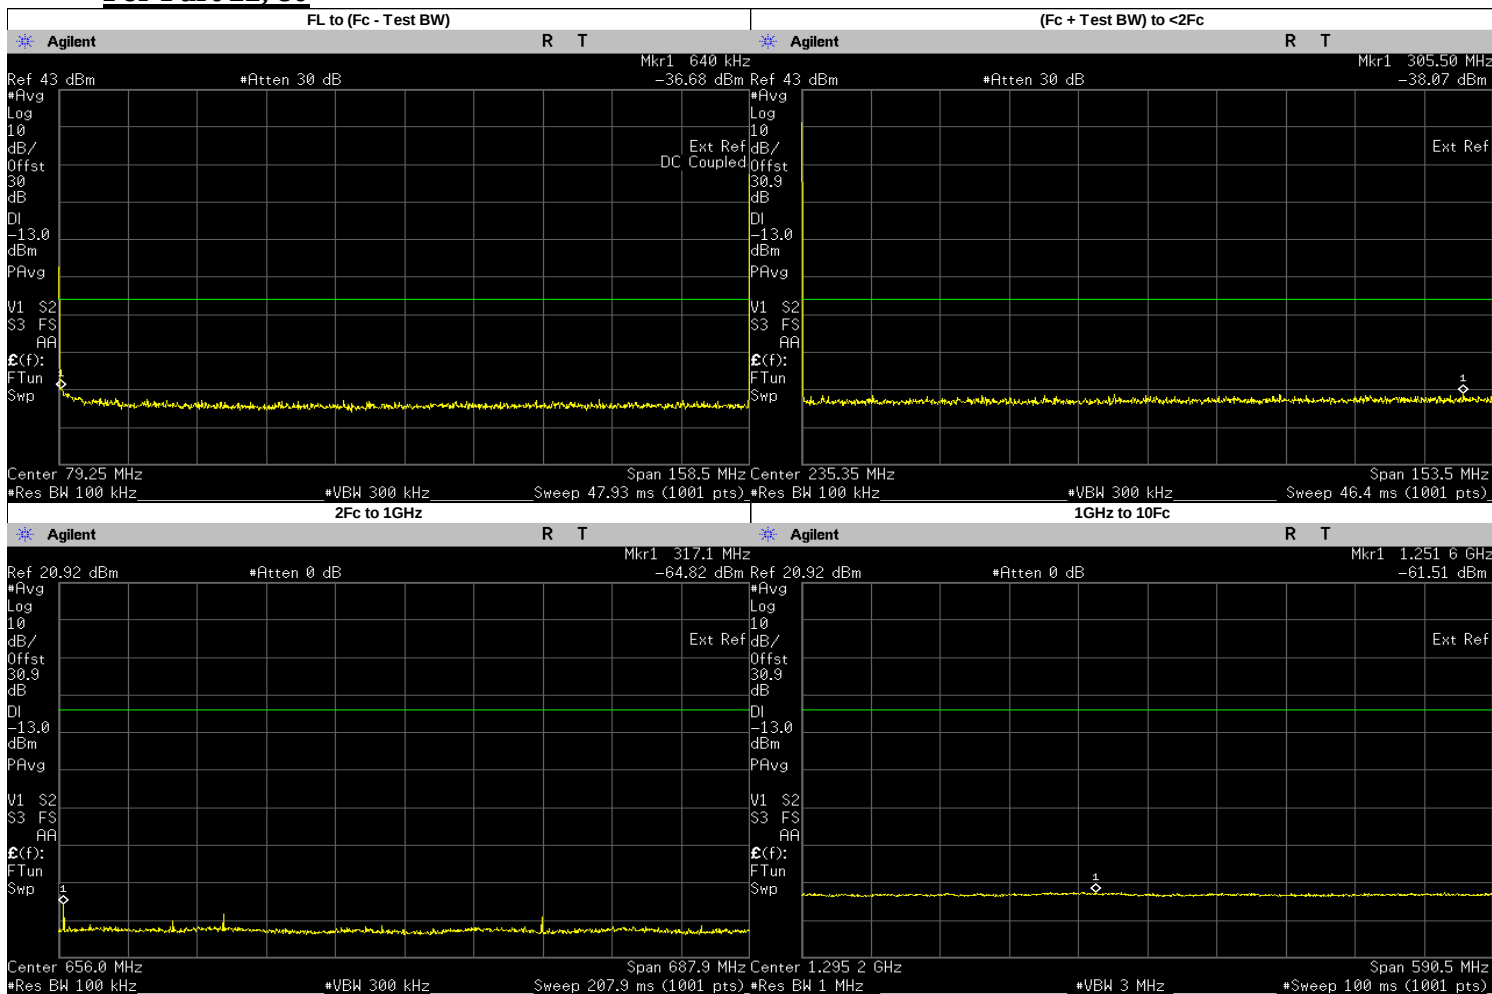


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.6400	-36.6770	-13	PASS
(Fc + Test BW) to <2Fc	305.4997	-38.0700	-13	PASS
2Fc to 1GHz	317.1000	-64.8200	-13	PASS
	475.6500	-68.3636	-13	PASS
	634.2000	-70.8852	-13	PASS
	792.7500	-69.2669	-13	PASS
	951.3000	-70.8924	-13	PASS
1GHz to 10Fc	1251.5530	-61.5100	-13	PASS
	1109.8500	-62.2260	-13	PASS
	1268.4000	-62.0931	-13	PASS
	1426.9500	-62.4363	-13	PASS
	1585.5000	-62.2701	-13	PASS

Analog: 161.7000 MHz, 25 kHz Channel Spacing, Low Power For Part 74

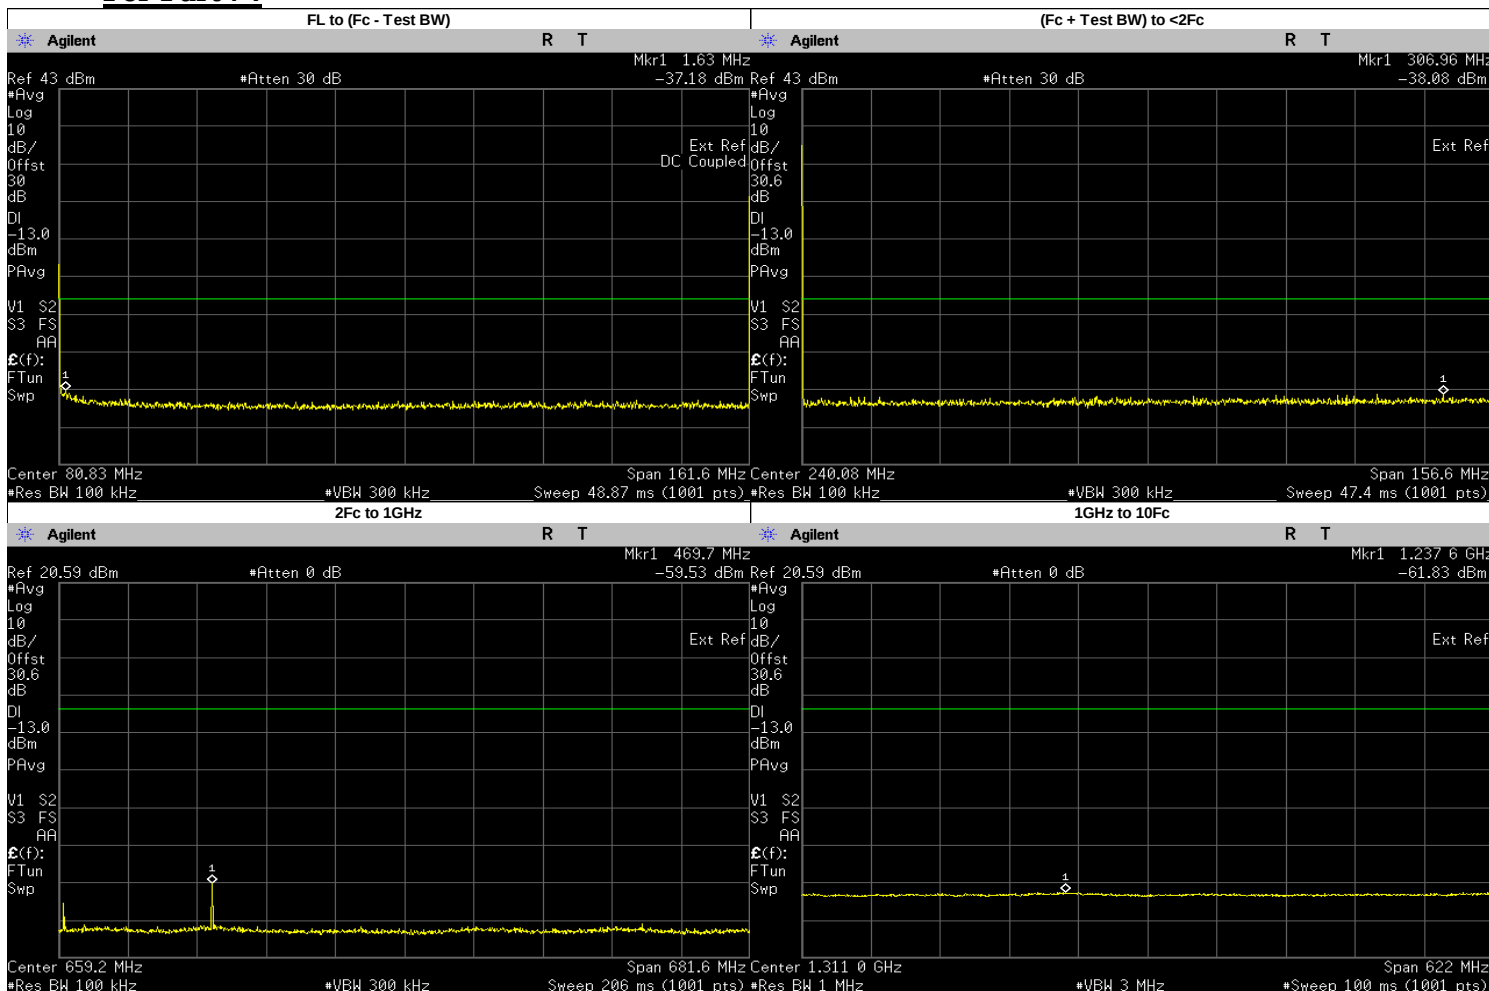


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6300	-37.1810	-13	PASS
(Fc + Test BW) to <2Fc	1.6300	-37.1810	-13	PASS
2Fc to 1GHz	469.7152	-59.5260	-13	PASS
	323.4000	-67.1925	-13	PASS
	485.1000	-71.8569	-13	PASS
	646.8000	-72.1370	-13	PASS
	808.5000	-72.1637	-13	PASS
	970.2000	-72.1638	-13	PASS
1GHz to 10Fc	1237.6040	-61.8300	-13	PASS
	1131.9000	-62.6093	-13	PASS
	1293.6000	-62.6695	-13	PASS
	1455.3000	-62.5875	-13	PASS
	1617.0000	-61.9766	-13	PASS

Analog: 161.7000 MHz, 25 kHz Channel Spacing, Max Power For Part 74

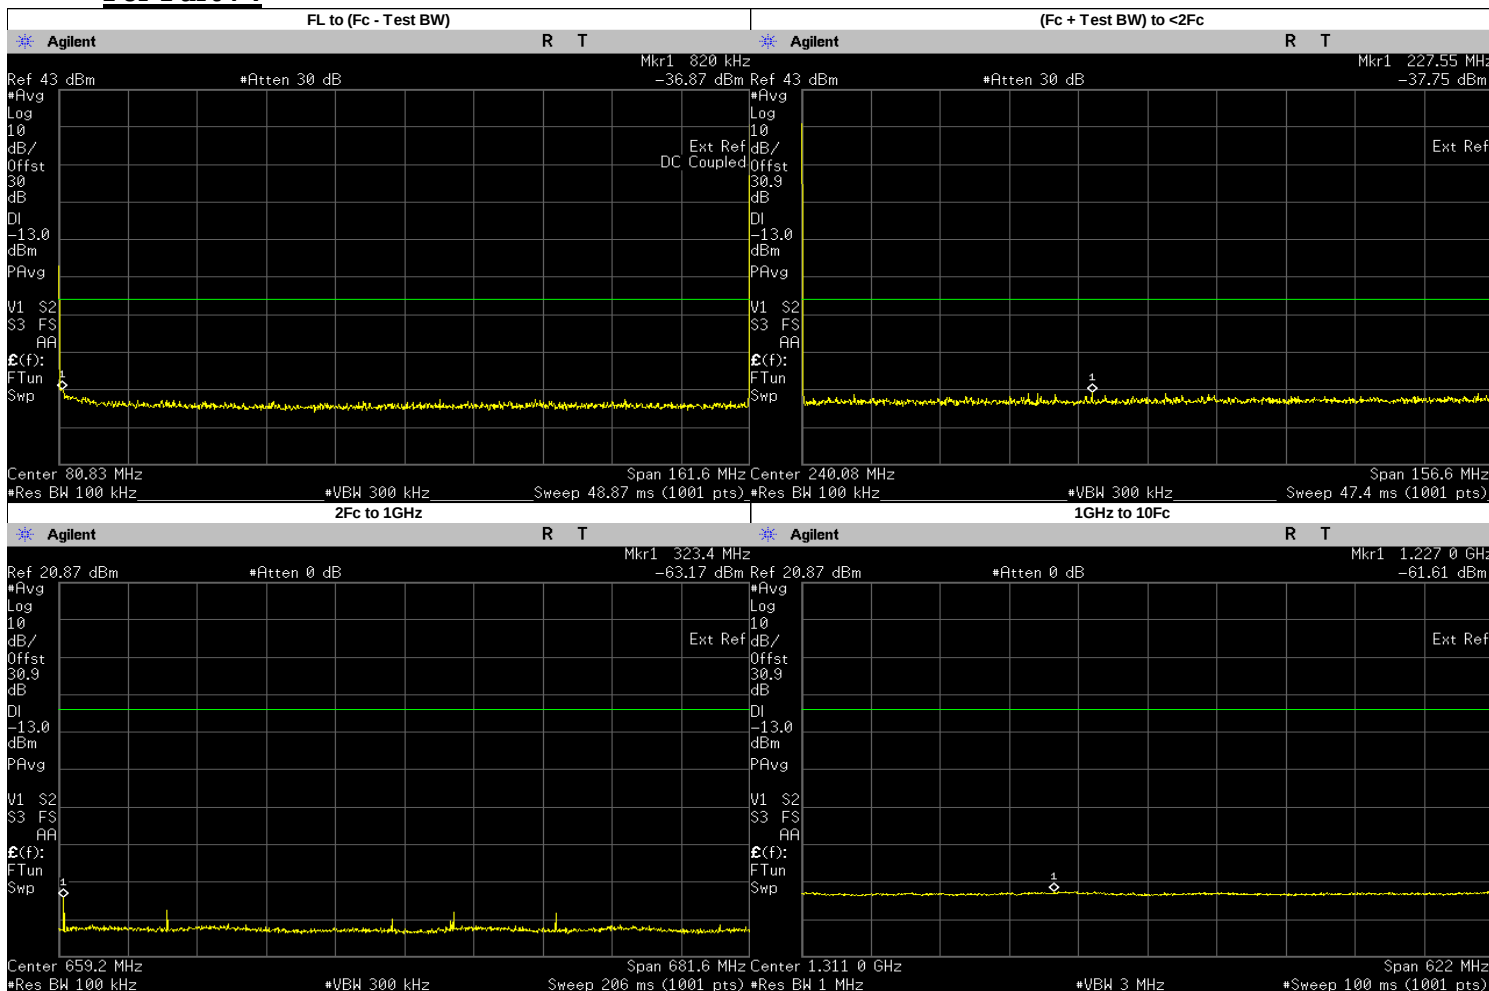

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8200	-36.8730	-13	PASS
(Fc + Test BW) to <2Fc	227.5463	-37.7500	-13	PASS
2Fc to 1GHz	323.4000	-63.1700	-13	PASS
	485.1000	-70.6699	-13	PASS
	646.8000	-69.6349	-13	PASS
	808.5000	-67.5926	-13	PASS
	970.2000	-70.9156	-13	PASS
1GHz to 10Fc	1227.0300	-61.6100	-13	PASS
	1131.9000	-62.4111	-13	PASS
	1293.6000	-62.3167	-13	PASS
	1455.3000	-62.5149	-13	PASS
	1617.0000	-62.0538	-13	PASS

Analog: 173.9875 MHz, 25 kHz Channel Spacing, Max Power
Not for FCC review

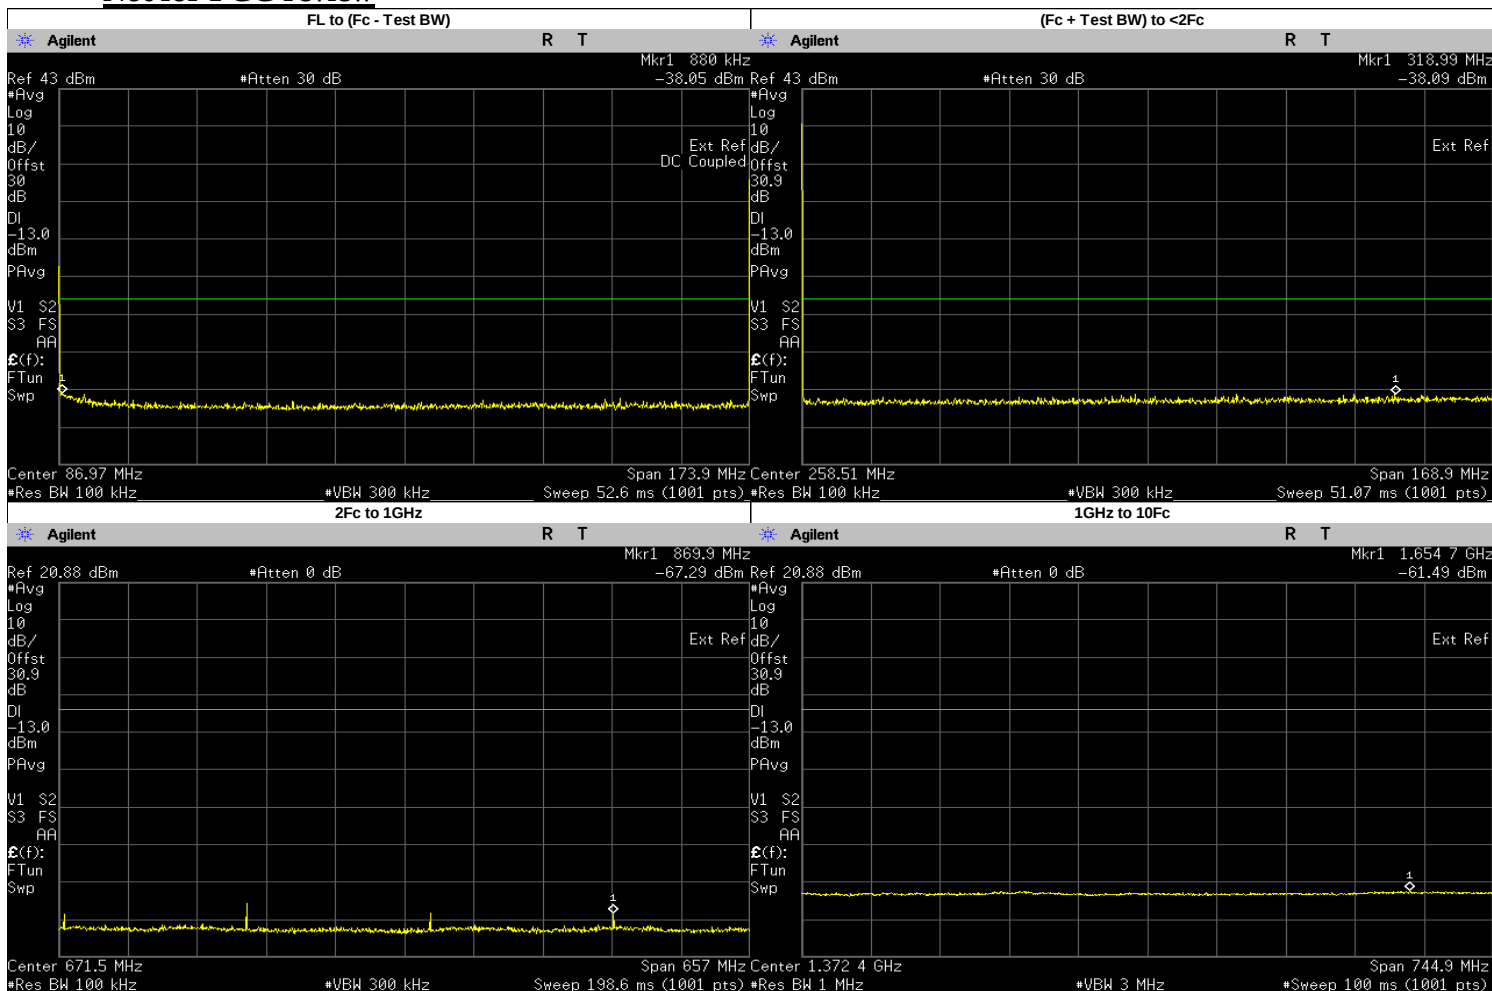


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8800	-38.0500	-13	PASS
(Fc + Test BW) to <2Fc	318.9867	-38.0900	-13	PASS
2Fc to 1GHz	869.9375	-67.2900	-13	PASS
	347.9750	-69.1532	-13	PASS
	521.9625	-67.6273	-13	PASS
	695.9500	-68.5667	-13	PASS
1GHz to 10Fc	1654.7450	-61.4900	-13	PASS
	1043.9250	-62.3727	-13	PASS
	1217.9120	-61.9797	-13	PASS
	1391.9000	-62.4544	-13	PASS
	1565.8880	-62.2595	-13	PASS
	1739.8750	-62.0036	-13	PASS

6.9.3. Test Result (Digital)


Digital: 138.0125 MHz, 12.5 kHz Channel Spacing, Max Power

Not for FCC review

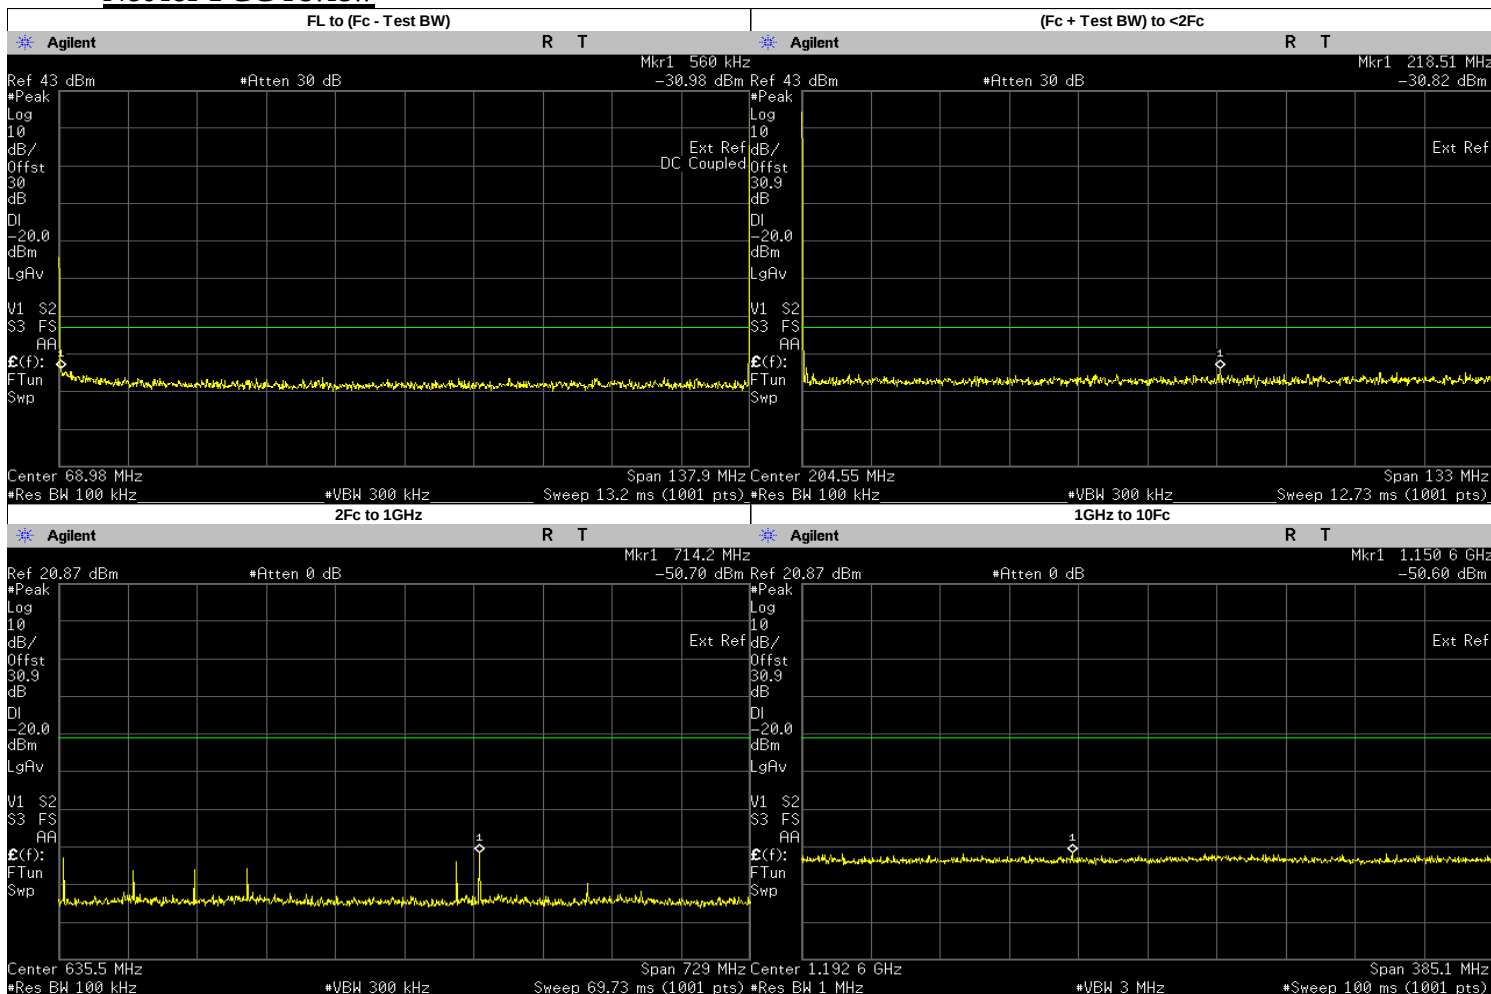


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.5600	-30.9820	-20	PASS
(Fc + Test BW) to <2Fc	218.5070	-30.8200	-20	PASS
2Fc to 1GHz	714.2000	-50.7000	-20	PASS
	276.0250	-53.9919	-20	PASS
	414.0375	-56.1178	-20	PASS
	552.0500	-63.2208	-20	PASS
	690.0625	-54.3566	-20	PASS
	828.0750	-59.1358	-20	PASS
	966.0875	-62.1669	-20	PASS
1GHz to 10Fc	1150.5840	-50.6000	-20	PASS
	1104.1000	-52.6313	-20	PASS
	1242.1120	-52.4841	-20	PASS
	1380.1250	-53.0379	-20	PASS

Digital: 158.5500 MHz, 12.5 kHz Channel Spacing, Low Power

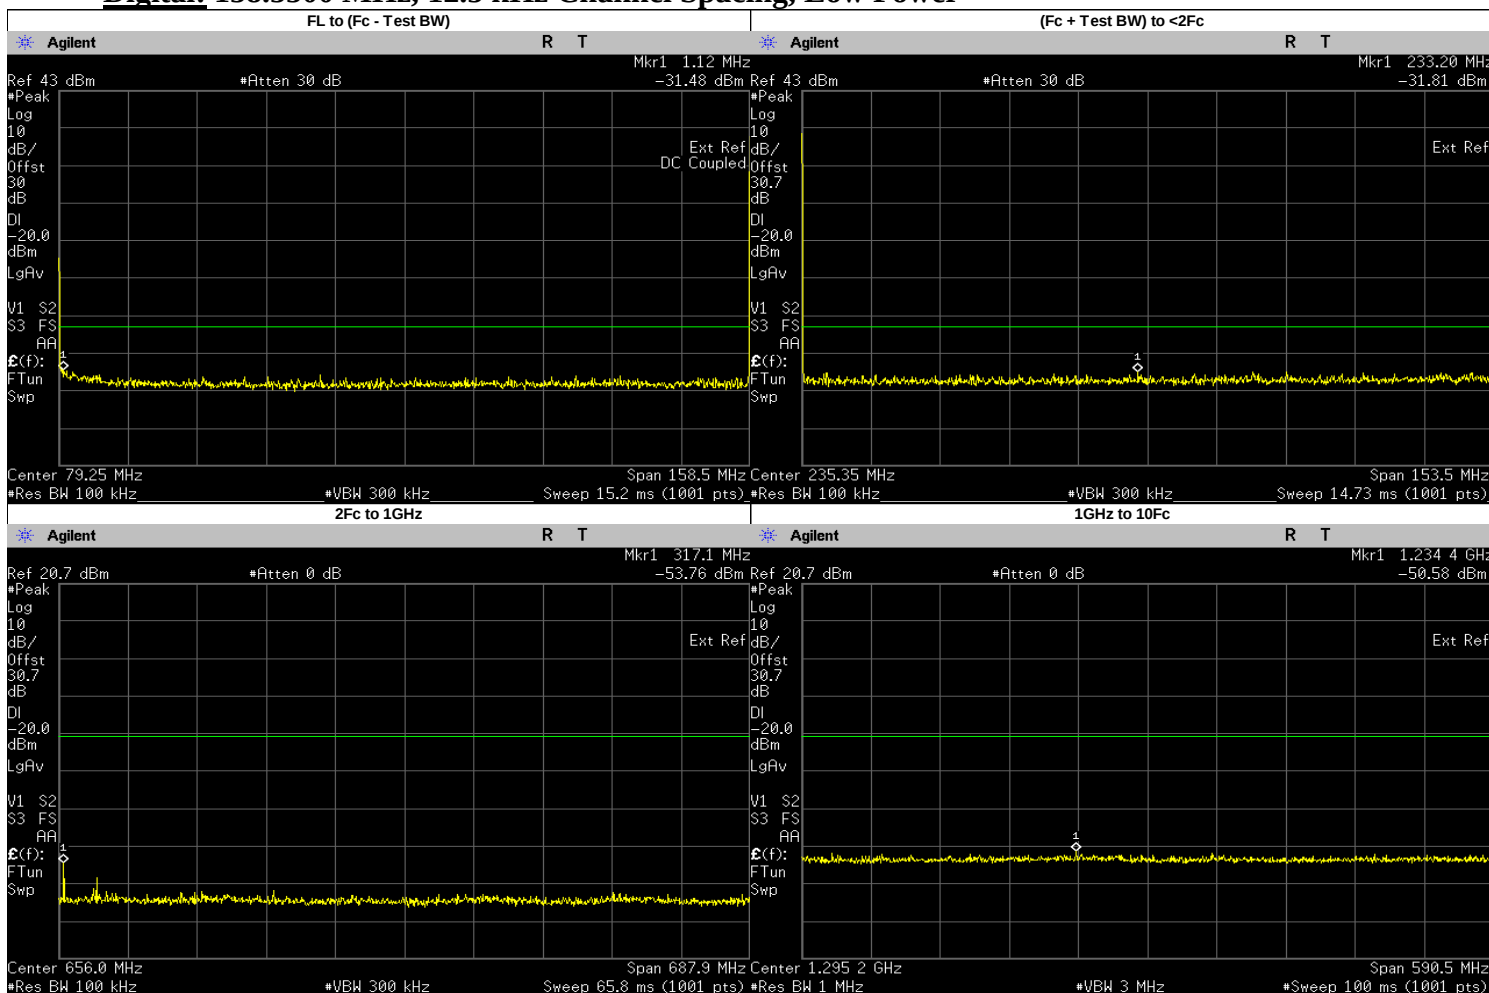


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1200	-31.4780	-20	PASS
(Fc + Test BW) to <2Fc	233.2039	-31.8100	-20	PASS
2Fc to 1GHz	317.1000	-53.7600	-20	PASS
	475.6500	-62.9173	-20	PASS
	634.2000	-63.5570	-20	PASS
	792.7500	-64.6002	-20	PASS
	951.3000	-64.8466	-20	PASS
1GHz to 10Fc	1234.4280	-50.5800	-20	PASS
	1109.8500	-52.6883	-20	PASS
	1268.4000	-51.8793	-20	PASS
	1426.9500	-52.6335	-20	PASS
	1585.5000	-52.6245	-20	PASS

Digital: 158.5500 MHz, 12.5 kHz Channel Spacing, Max Power

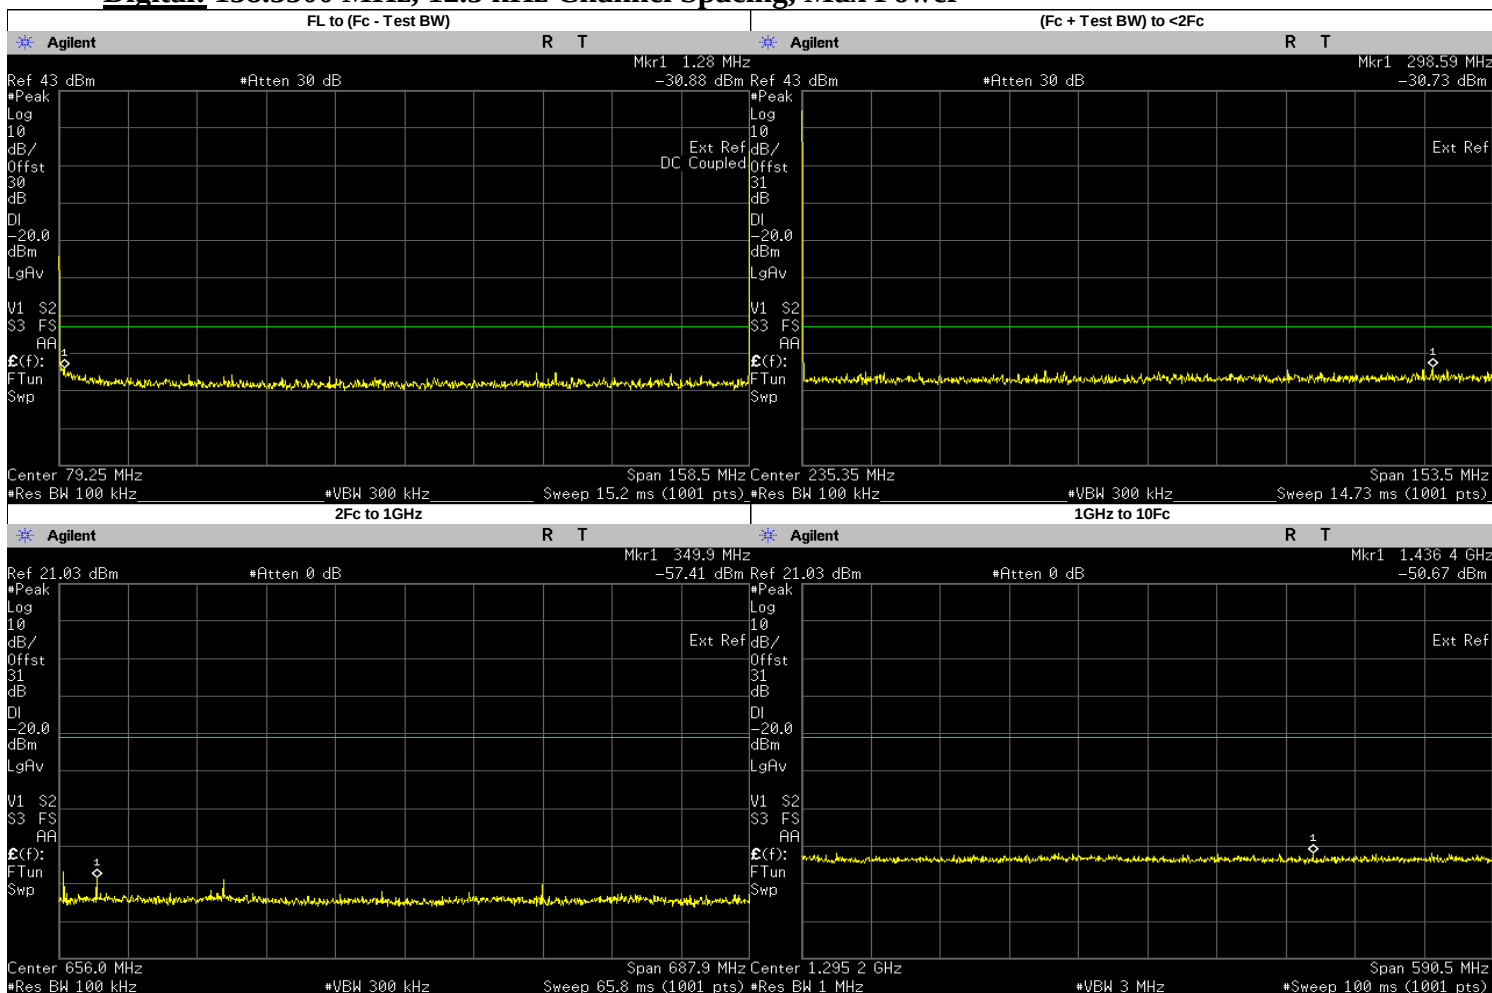


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.2800	-30.8830	-20	PASS
(Fc + Test BW) to <2Fc	298.5925	-30.7300	-20	PASS
2Fc to 1GHz	349.9345	-57.4100	-20	PASS
	317.1000	-57.9532	-20	PASS
	475.6500	-58.8819	-20	PASS
	634.2000	-61.6174	-20	PASS
	792.7500	-60.5999	-20	PASS
	951.3000	-62.8731	-20	PASS
1GHz to 10Fc	1436.3800	-50.6700	-20	PASS
	1109.8500	-53.0082	-20	PASS
	1268.4000	-51.8549	-20	PASS
	1426.9500	-52.6782	-20	PASS
	1585.5000	-52.8574	-20	PASS

Digital: 161.7000 MHz, 12.5 kHz Channel Spacing, Low Power

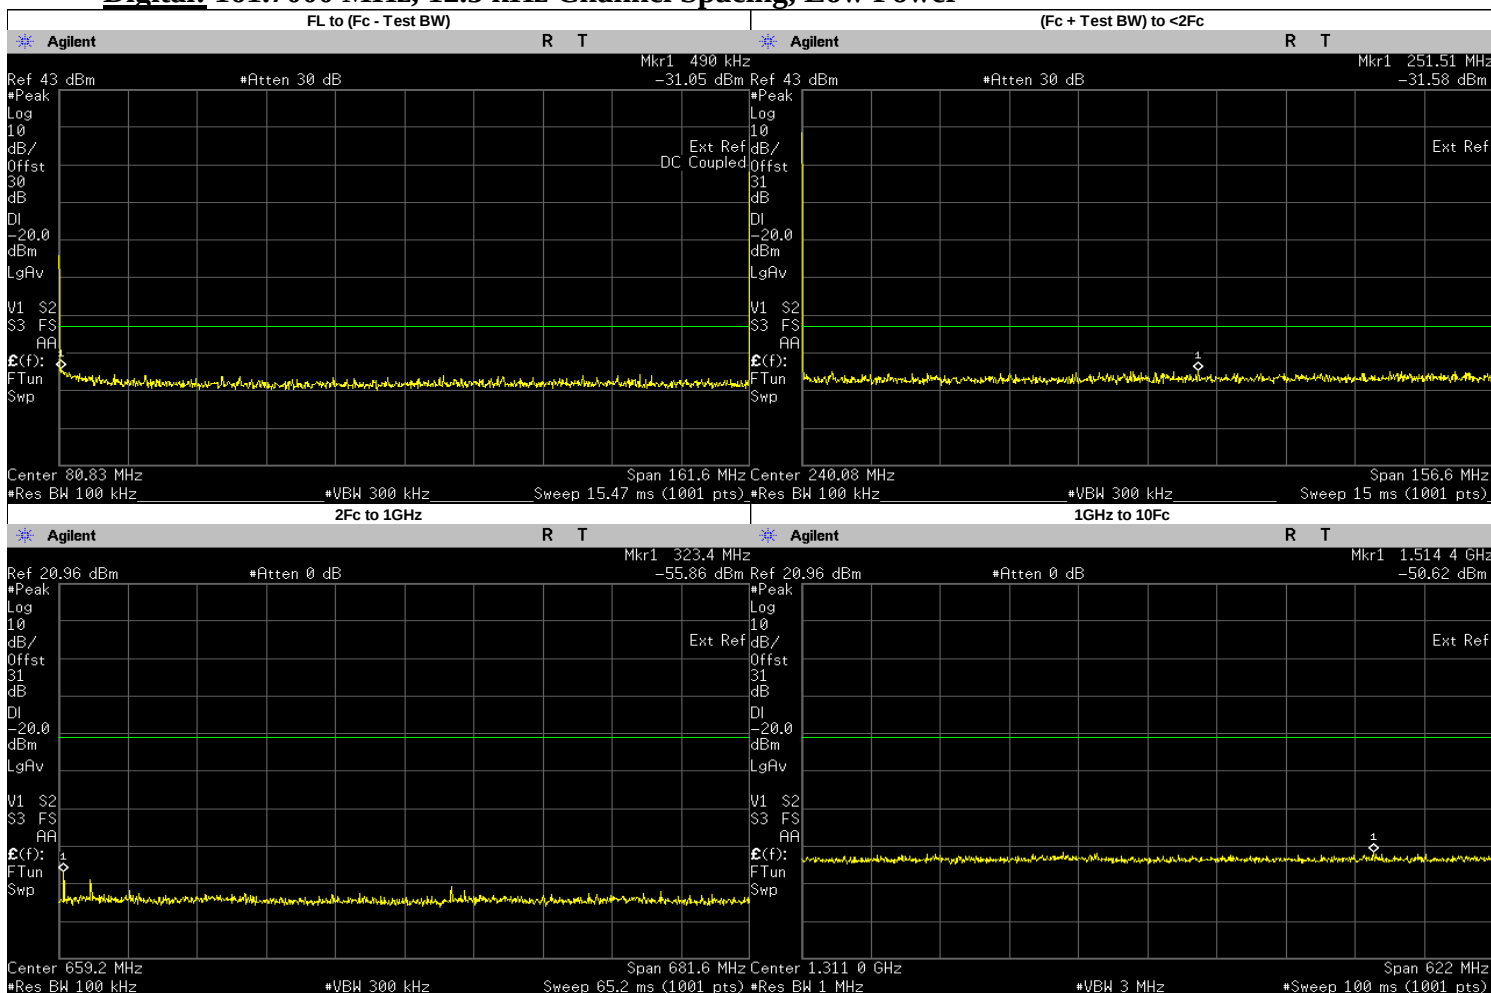


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4900	-31.0490	-20	PASS
(Fc + Test BW) to <2Fc	251.5129	-31.5800	-20	PASS
2Fc to 1GHz	323.4000	-55.8600	-20	PASS
	485.1000	-63.3944	-20	PASS
	646.8000	-63.0516	-20	PASS
	808.5000	-63.5366	-20	PASS
	970.2000	-64.2711	-20	PASS
	1514.3940	-50.6200	-20	PASS
1GHz to 10Fc	1131.9000	-52.4824	-20	PASS
	1293.6000	-52.5278	-20	PASS
	1455.3000	-52.2610	-20	PASS
	1617.0000	-52.7564	-20	PASS

Digital: 161.7000 MHz, 12.5 kHz Channel Spacing, Max Power

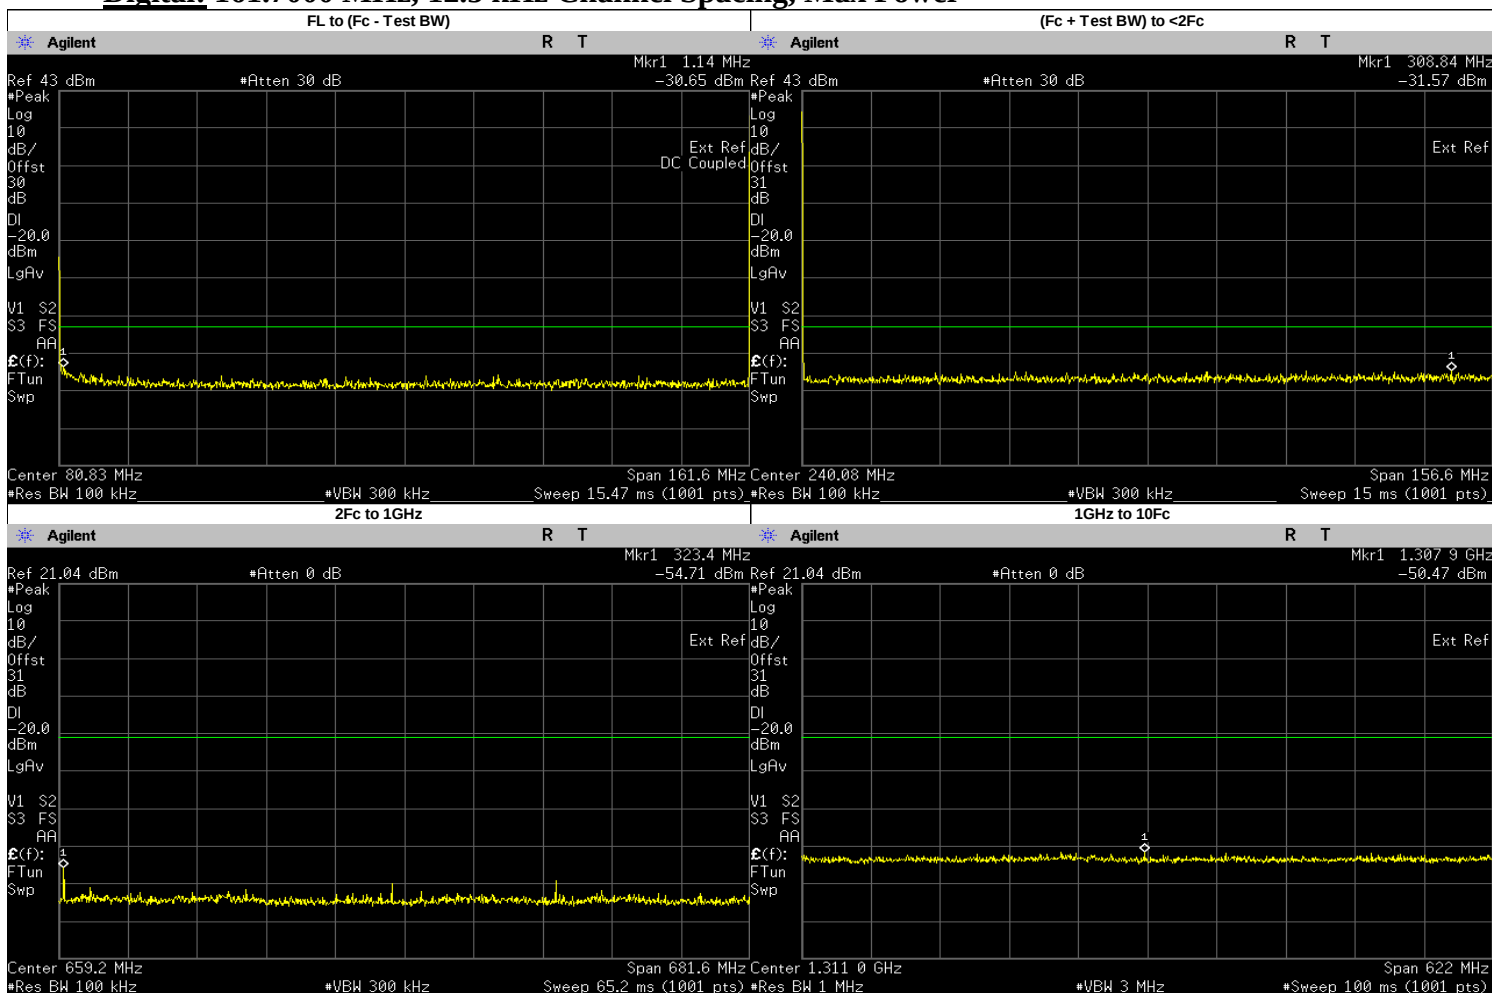


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1400	-30.6460	-20	PASS
(Fc + Test BW) to <2Fc	308.8447	-31.5700	-20	PASS
2Fc to 1GHz	323.4000	-54.7100	-20	PASS
	485.1000	-61.5076	-20	PASS
	646.8000	-59.8146	-20	PASS
	808.5000	-58.2513	-20	PASS
	970.2000	-63.4683	-20	PASS
	1307.8900	-50.4700	-20	PASS
1GHz to 10Fc	1131.9000	-52.5176	-20	PASS
	1293.6000	-52.5824	-20	PASS
	1455.3000	-52.7292	-20	PASS
	1617.0000	-51.9972	-20	PASS

Digital: 173.3875 MHz, 12.5 kHz Channel Spacing, Max Power

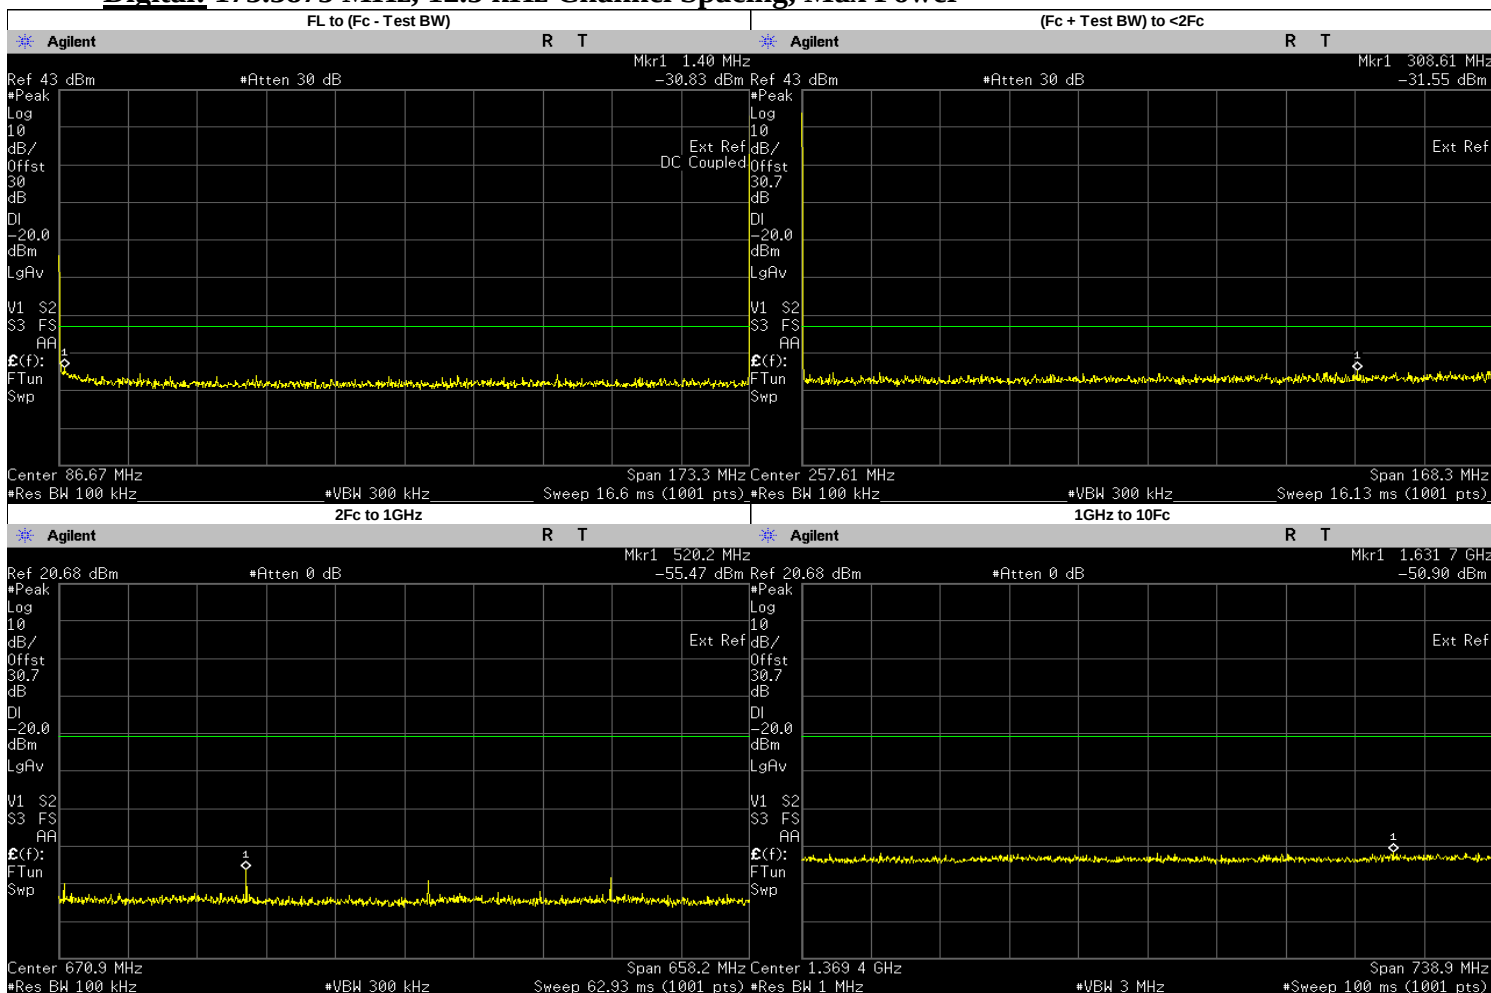


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4000	-30.8330	-20	PASS
(Fc + Test BW) to <2Fc	308.6136	-31.5500	-20	PASS
2Fc to 1GHz	520.1625	-55.4700	-20	PASS
	346.7750	-60.5360	-20	PASS
	693.5500	-58.9584	-20	PASS
	866.9375	-58.6420	-20	PASS
	1631.7380	-50.9000	-20	PASS
1GHz to 10Fc	1040.3250	-53.5025	-20	PASS
	1213.7130	-52.3584	-20	PASS
	1387.1000	-52.7598	-20	PASS
	1560.4870	-53.0223	-20	PASS
	1733.8750	-52.4801	-20	PASS

Phase II: 138.0125 MHz, 12.5 kHz Channel Spacing, Max Power
Not for FCC review

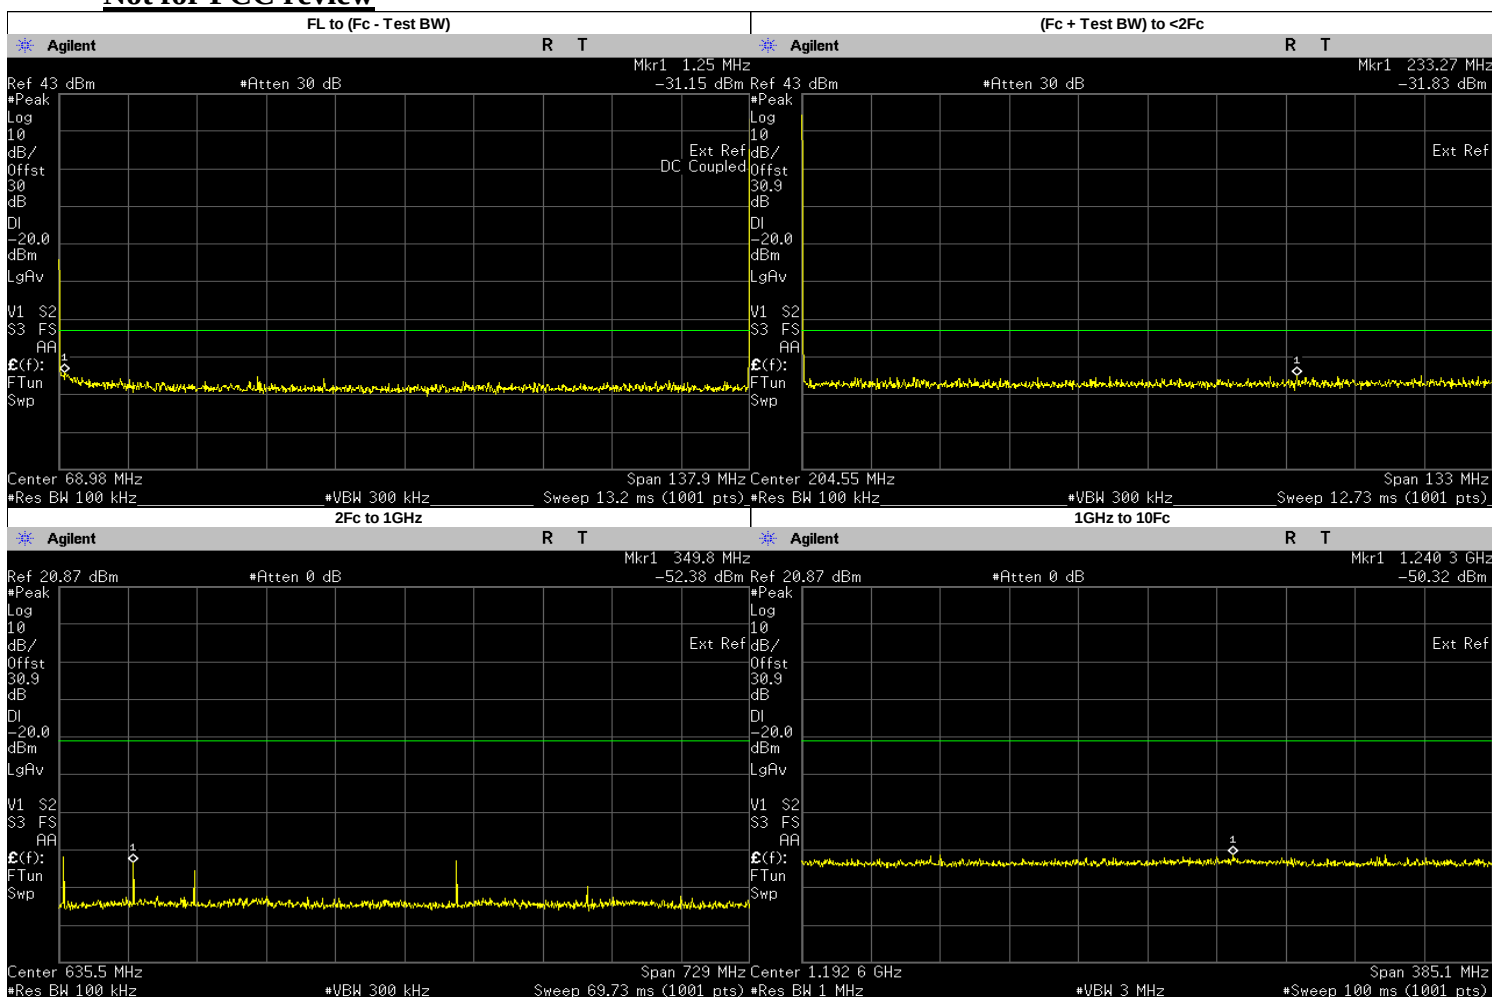


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.2500	-31.1540	-20	PASS
(Fc + Test BW) to <2Fc	233.2652	-31.8300	-20	PASS
2Fc to 1GHz	349.7543	-52.3800	-20	PASS
	276.0250	-52.6249	-20	PASS
	414.0375	-56.2901	-20	PASS
	552.0500	-63.9200	-20	PASS
	690.0625	-53.8873	-20	PASS
	828.0750	-59.3778	-20	PASS
	966.0875	-63.2644	-20	PASS
1GHz to 10Fc	1240.3180	-50.3200	-20	PASS
	1104.1000	-53.0990	-20	PASS
	1242.1120	-52.0023	-20	PASS
	1380.1250	-52.4453	-20	PASS

Phase II: 158.5500 MHz, 12.5 kHz Channel Spacing, Low Power

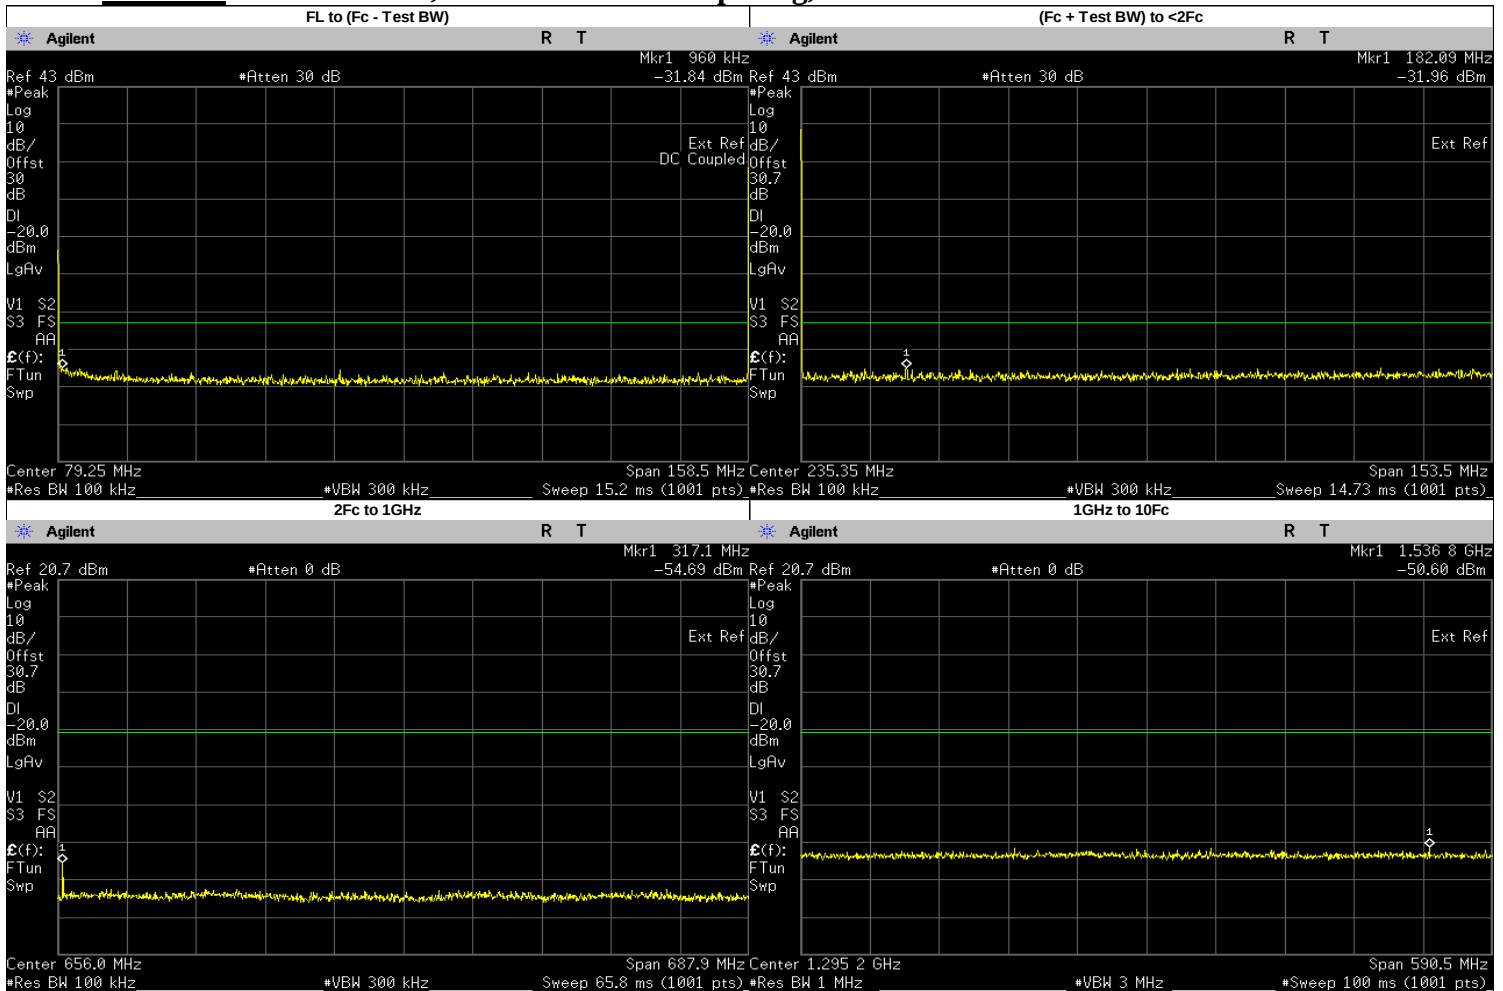


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.9600	-31.8410	-20	PASS
(Fc + Test BW) to <2Fc	182.0903	-31.9600	-20	PASS
2Fc to 1GHz	317.1000	-54.6900	-20	PASS
	475.6500	-63.0948	-20	PASS
	634.2000	-63.9561	-20	PASS
	792.7500	-64.2897	-20	PASS
	951.3000	-63.6034	-20	PASS
1GHz to 10Fc	1536.7640	-50.6000	-20	PASS
	1109.8500	-53.2125	-20	PASS
	1268.4000	-52.8325	-20	PASS
	1426.9500	-52.7929	-20	PASS
	1585.5000	-53.3148	-20	PASS

Phase II: 158.5500 MHz, 12.5 kHz Channel Spacing, Max Power.

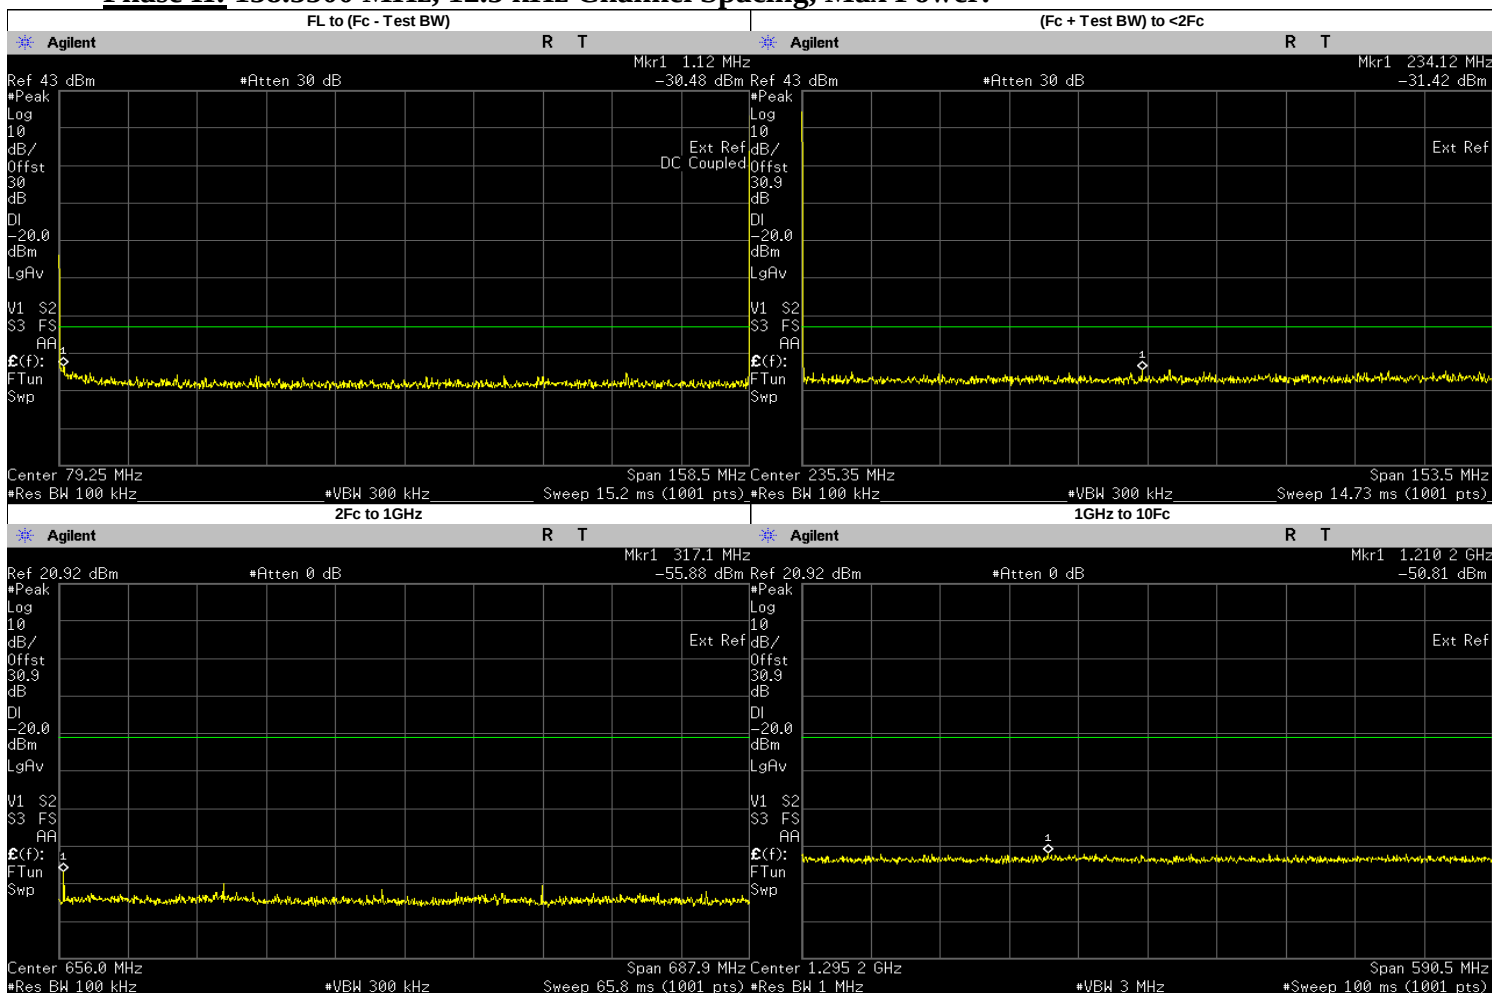


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1200	-30.4770	-20	PASS
(Fc + Test BW) to <2Fc	234.1249	-31.4200	-20	PASS
2Fc to 1GHz	317.1000	-55.8800	-20	PASS
	475.6500	-59.9337	-20	PASS
	634.2000	-61.3670	-20	PASS
	792.7500	-60.9403	-20	PASS
	951.3000	-62.1752	-20	PASS
1GHz to 10Fc	1210.2180	-50.8100	-20	PASS
	1109.8500	-53.1600	-20	PASS
	1268.4000	-52.6052	-20	PASS
	1426.9500	-53.2672	-20	PASS
	1585.5000	-52.6446	-20	PASS

Phase II: 161.7000 MHz, 12.5 kHz Channel Spacing, Low Power

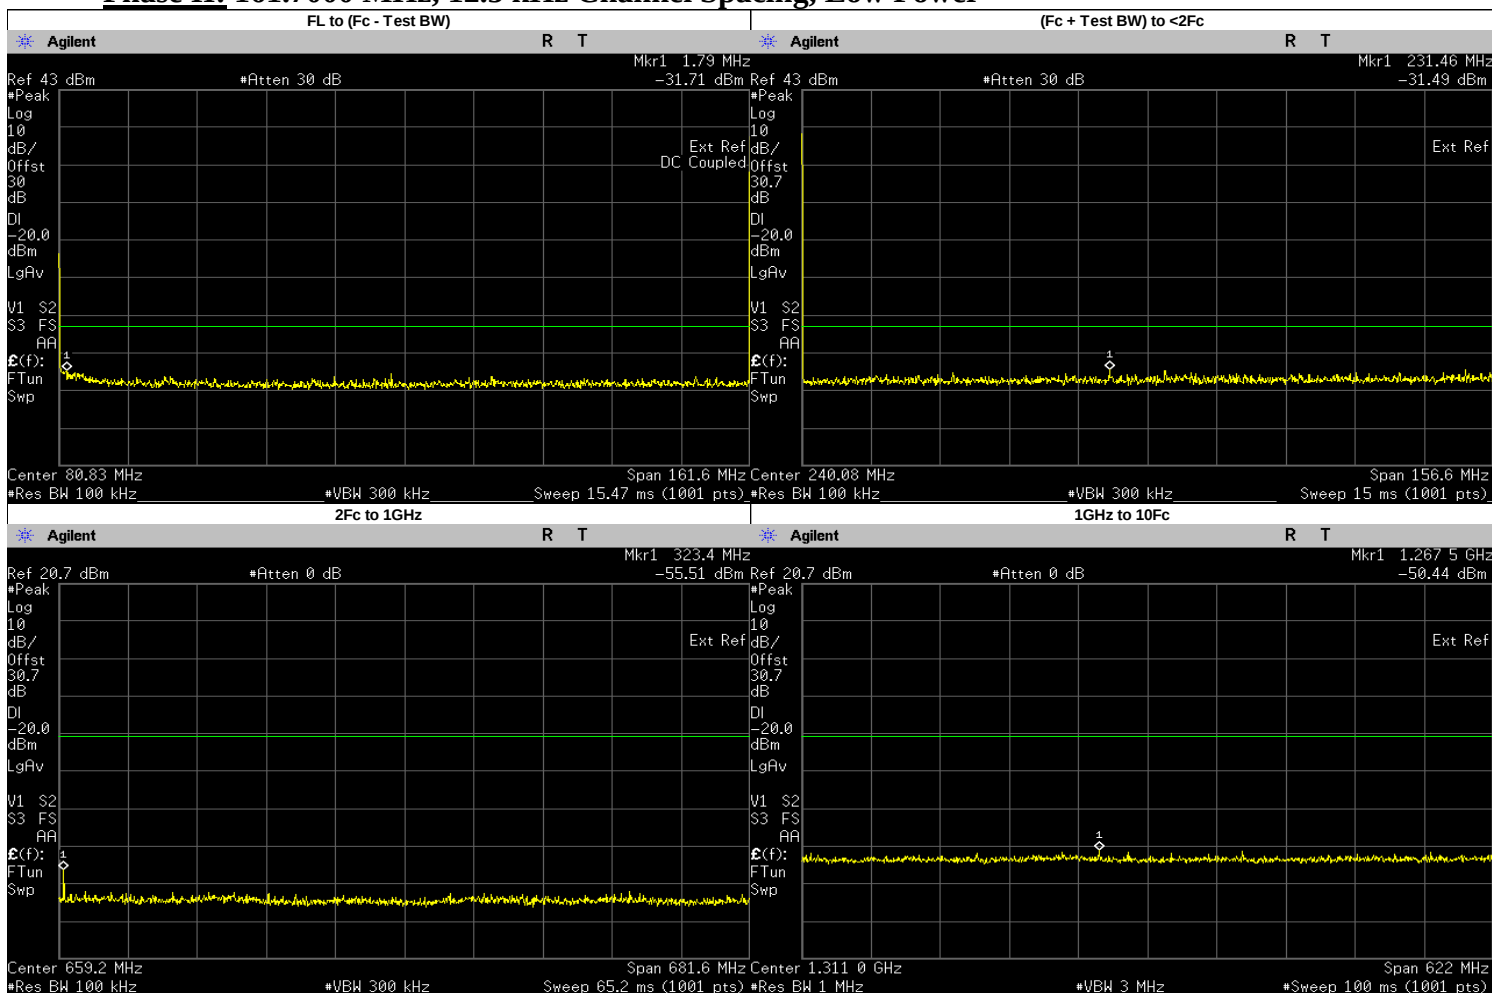


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.7900	-31.7070	-20	PASS
(Fc + Test BW) to <2Fc	231.4624	-31.4900	-20	PASS
2Fc to 1GHz	323.4000	-55.5100	-20	PASS
	485.1000	-63.0088	-20	PASS
	646.8000	-62.9684	-20	PASS
	808.5000	-64.4982	-20	PASS
	970.2000	-63.8606	-20	PASS
	1267.4600	-50.4400	-20	PASS
1GHz to 10Fc	1131.9000	-52.8427	-20	PASS
	1293.6000	-53.0882	-20	PASS
	1455.3000	-52.7721	-20	PASS
	1617.0000	-52.5946	-20	PASS

Phase II: 161.7000 MHz, 12.5 kHz Channel Spacing, Max Power

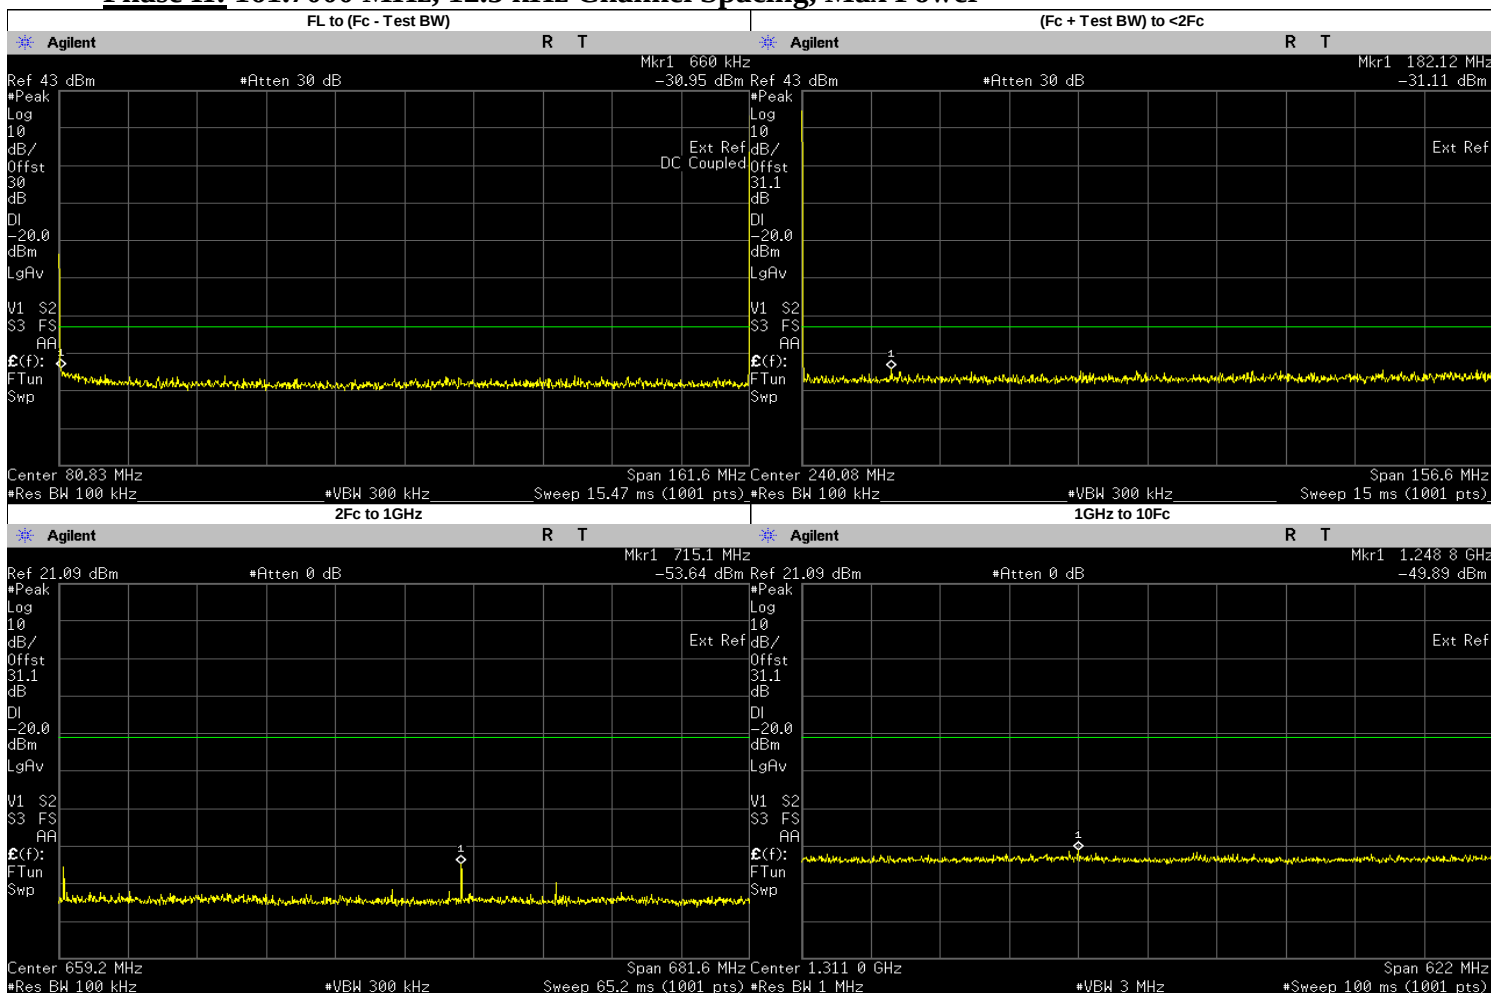

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.6600	-30.9490	-20	PASS
(Fc + Test BW) to <2Fc	182.1194	-31.1100	-20	PASS
2Fc to 1GHz	715.0912	-53.6400	-20	PASS
	323.4000	-56.3514	-20	PASS
	485.1000	-61.8925	-20	PASS
	646.8000	-60.9492	-20	PASS
	808.5000	-58.7738	-20	PASS
	970.2000	-62.6872	-20	PASS
1GHz to 10Fc	1248.8000	-49.8900	-20	PASS
	1131.9000	-52.8836	-20	PASS
	1293.6000	-52.0657	-20	PASS
	1455.3000	-52.2802	-20	PASS
	1617.0000	-52.1639	-20	PASS

Phase II: 173.3875 MHz, 12.5 kHz Channel Spacing, Max Power

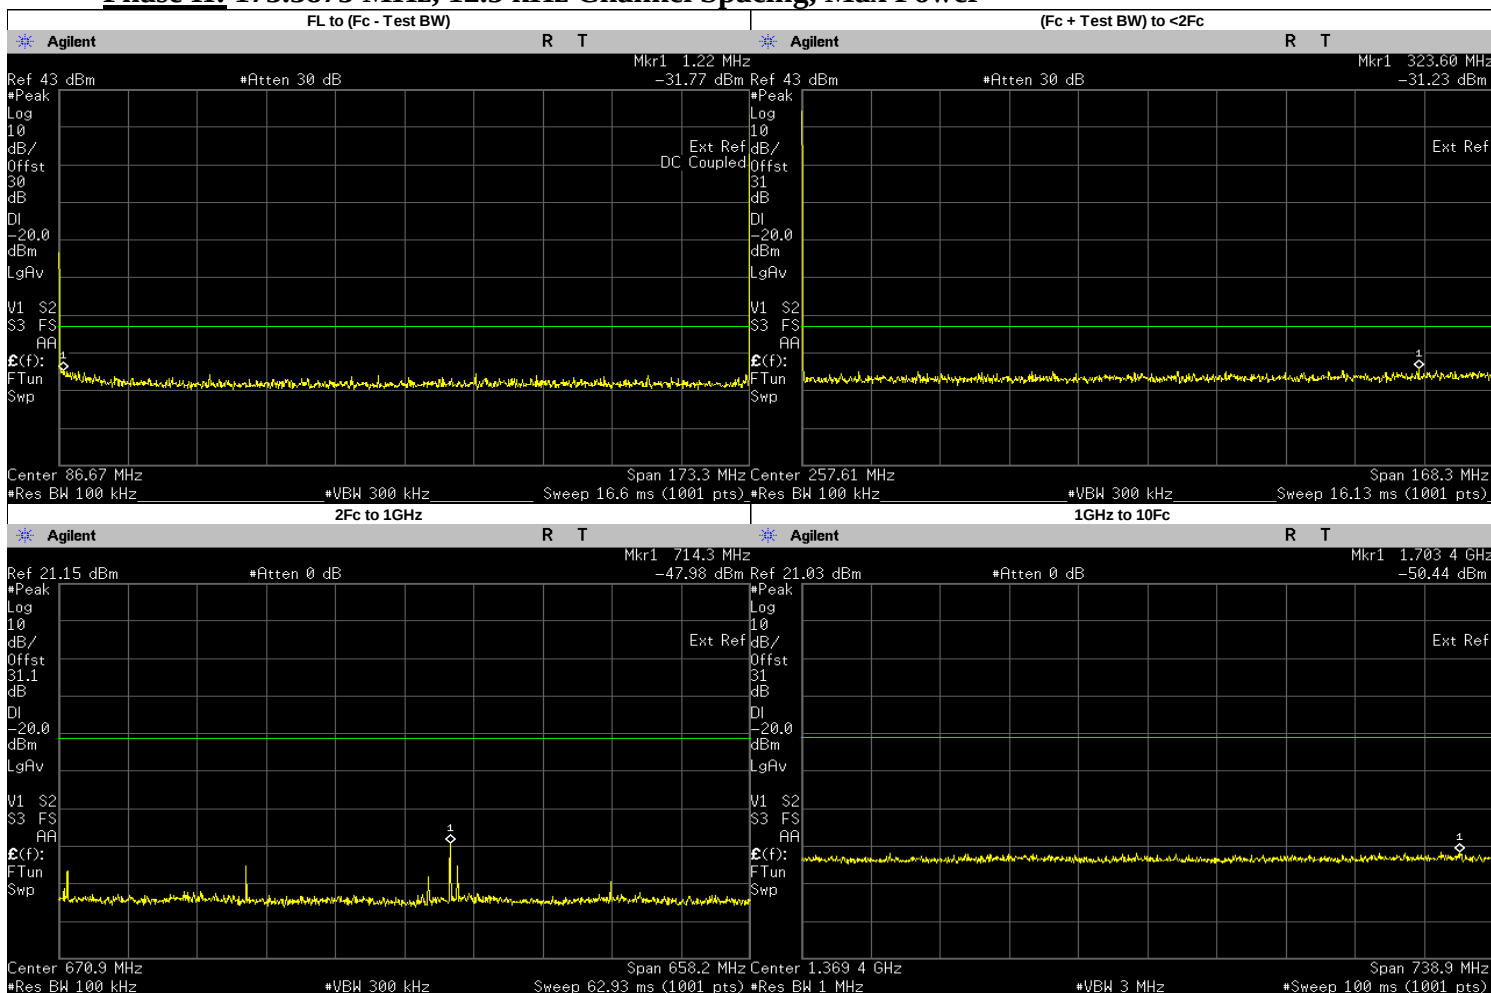

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.2200	-31.7720	-20	PASS
(Fc + Test BW) to <2Fc	323.5952	-31.2300	-20	PASS
2Fc to 1GHz	714.3000	-47.9800	-20	PASS
	346.7750	-60.1510	-20	PASS
	520.1625	-52.8152	-20	PASS
	693.5500	-57.2962	-20	PASS
	866.9375	-58.5776	-20	PASS
1GHz to 10Fc	1703.4090	-50.4400	-20	PASS
	1040.3250	-52.5635	-20	PASS
	1213.7130	-52.6038	-20	PASS
	1387.1000	-52.6376	-20	PASS
	1560.4870	-52.4228	-20	PASS
	1733.8750	-52.1317	-20	PASS

6.9.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.10. Radiated Spurious Emission

6.10.1. Test Setup

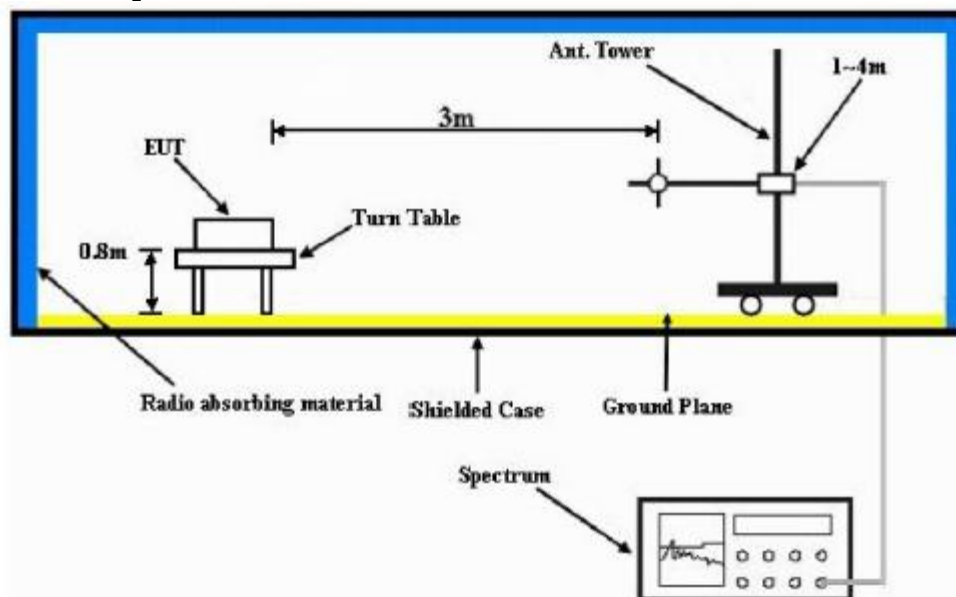


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.10.2. Test Result (Analog)

Not for FCC review

SAC Transmitter Radiated Emission:
 Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 138.012500 MHz 25 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
276.0250	-13.0000	-93.8298 **	-92.8390 **
414.0375	-13.0000	-89.6362 **	-89.5080 **
552.0500	-13.0000	-84.4240 **	-85.3173 **
690.0625	-13.0000	-84.5423 **	-83.8210 **
828.0750	-13.0000	-81.9405 **	-82.7308 **
966.0875	-13.0000	-80.9823 **	-81.3540 **
1104.1000	-13.0000	-61.7320 **	-60.9309 **
1242.1125	-13.0000	-59.8200 **	-59.6233 **
1380.1250	-13.0000	-59.9683 **	-59.8554 **

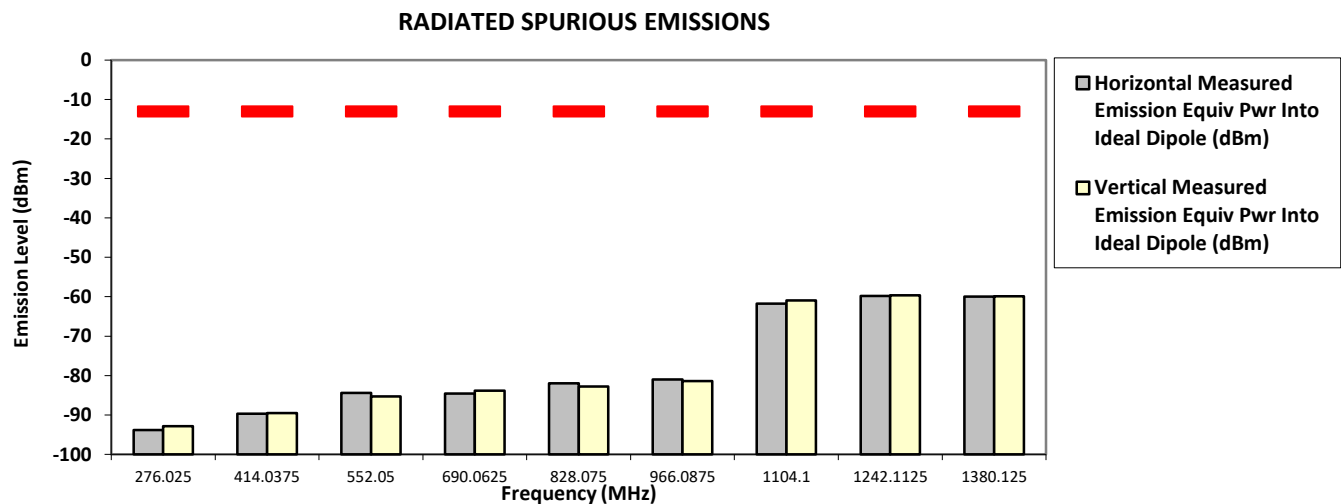

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Wed, 4 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

For Part 22, 80

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 158.550000 MHz 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-91.7185 **	-92.5298 **
475.6500	-13.0000	-87.7602 **	-87.6369 **
634.2000	-13.0000	-84.2897 **	-84.6281 **
792.7500	-13.0000	-83.4006 **	-82.3517 **
951.3000	-13.0000	-81.6365 **	-80.9071 **
1109.8500	-13.0000	-61.0308 **	-60.3989 **
1268.4000	-13.0000	-60.2263 **	-60.7314 **
1426.9500	-13.0000	-58.6117 **	-59.4045 **
1585.5000	-13.0000	-59.5907 **	-57.5600 **

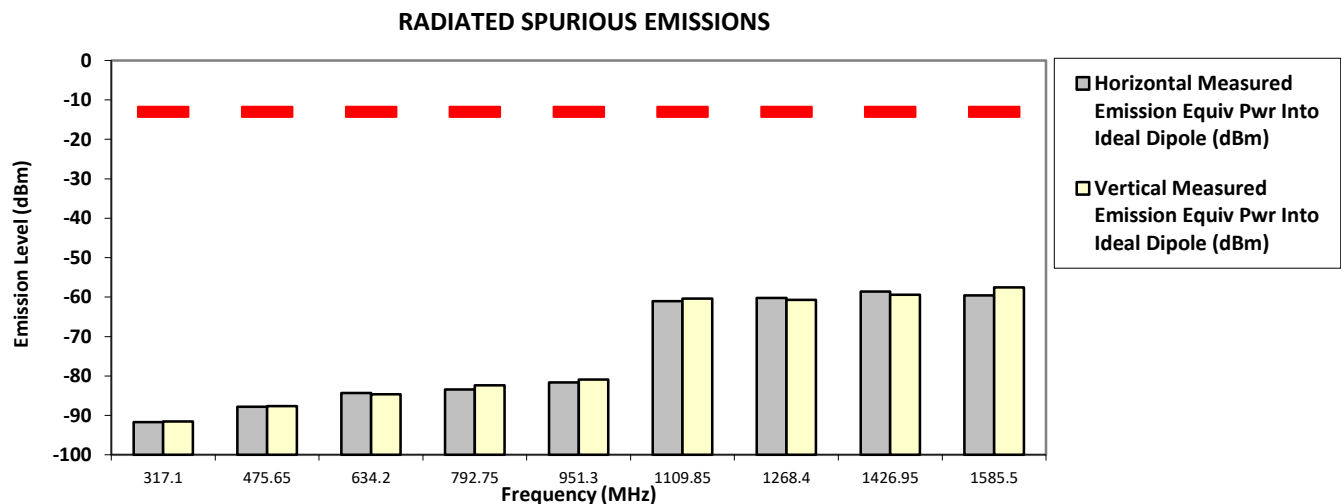

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

For Part 22, 80

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 158.550000 MHz 25 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-92.6774 **	-91.5484 **
475.6500	-13.0000	-87.1053 **	-87.6758 **
634.2000	-13.0000	-85.0556 **	-85.5426 **
792.7500	-13.0000	-82.6268 **	-83.2183 **
951.3000	-13.0000	-81.1124 **	-81.2664 **
1109.8500	-13.0000	-61.7883 **	-61.0231 **
1268.4000	-13.0000	-60.6473 **	-58.7953 **
1426.9500	-13.0000	-59.5576 **	-57.7836 **
1585.5000	-13.0000	-59.7145 **	-59.0420 **

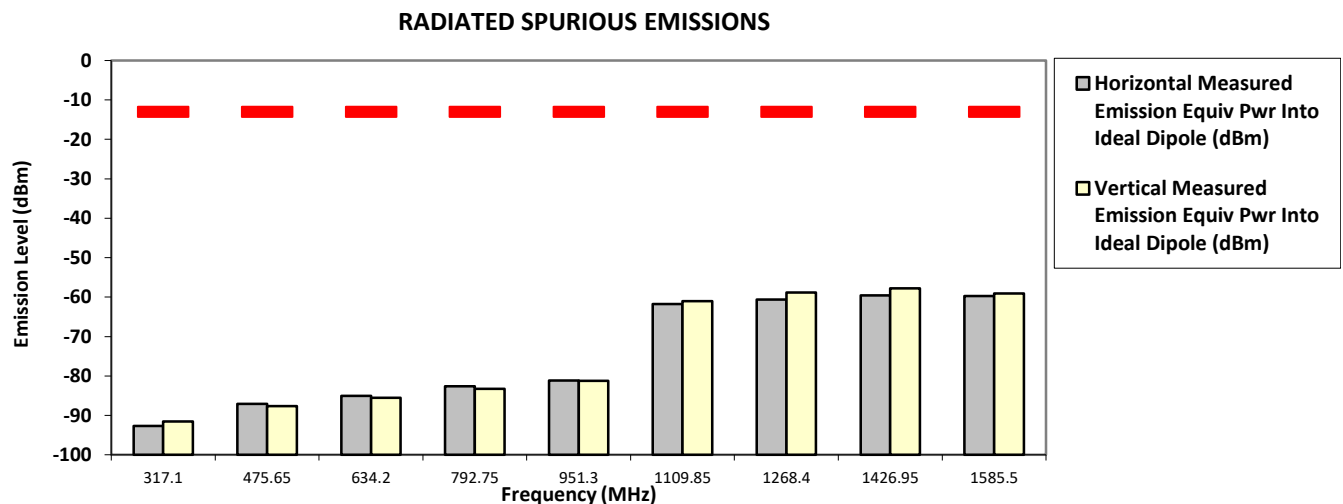

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

For Part 74

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 161.700000 MHz 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-92.1693 **	-90.3945 **
485.1000	-13.0000	-87.2244 **	-87.3629 **
646.8000	-13.0000	-82.6747 **	-83.8848 **
808.5000	-13.0000	-82.7188 **	-82.3407 **
970.2000	-13.0000	-80.9030 **	-80.3457 **
1131.9000	-13.0000	-61.0192 **	-60.0117 **
1293.6000	-13.0000	-60.0019 **	-60.2296 **
1455.3000	-13.0000	-59.4340 **	-59.5583 **
1617.0000	-13.0000	-59.3565 **	-59.0517 **

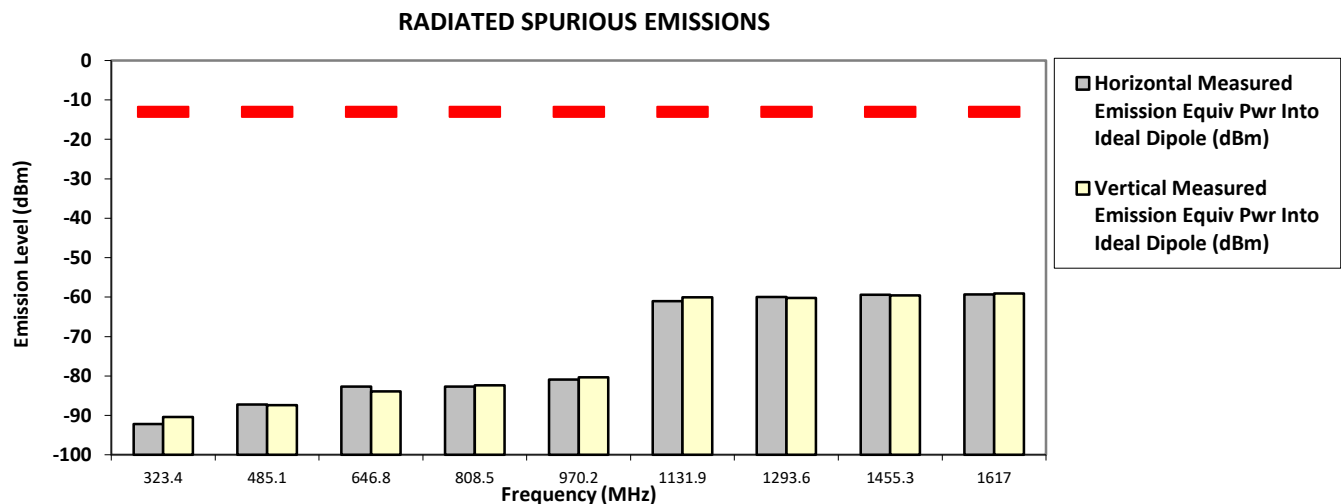

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

For Part 74

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 161.700000 MHz 25 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-91.4645 **	-92.5466 **
485.1000	-13.0000	-86.9537 **	-87.0063 **
646.8000	-13.0000	-84.0551 **	-84.0174 **
808.5000	-13.0000	-80.9513 **	-82.5465 **
970.2000	-13.0000	-80.3206 **	-80.8378 **
1131.9000	-13.0000	-60.8751 **	-60.7198 **
1293.6000	-13.0000	-59.6580 **	-59.8818 **
1455.3000	-13.0000	-58.9336 **	-59.1529 **
1617.0000	-13.0000	-59.3598 **	-59.6489 **

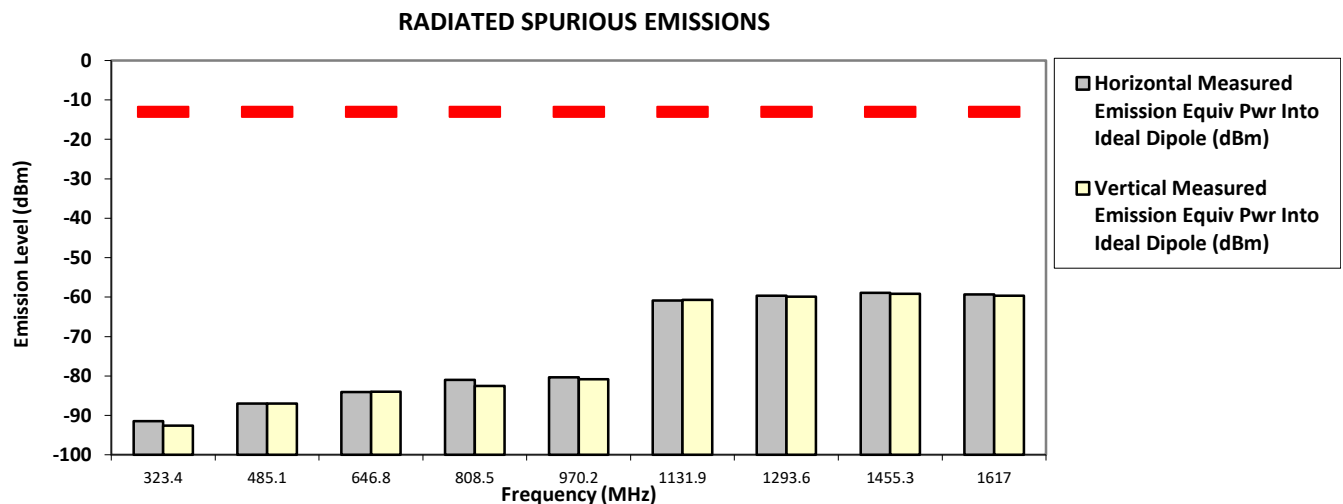

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

Not for FCC review

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX Analog
 173.987500 MHz 25 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
347.9750	-13.0000	-91.3843 **	-91.5751 **
521.9625	-13.0000	-87.7926 **	-87.6620 **
695.9500	-13.0000	-83.9084 **	-84.0105 **
869.9375	-13.0000	-82.8045 **	-82.6370 **
1043.9250	-13.0000	-62.2767 **	-62.2281 **
1217.9125	-13.0000	-60.7795 **	-60.1586 **
1391.9000	-13.0000	-59.7190 **	-59.5845 **
1565.8875	-13.0000	-59.1498 **	-59.7770 **
1739.8750	-13.0000	-58.2087 **	-58.6680 **

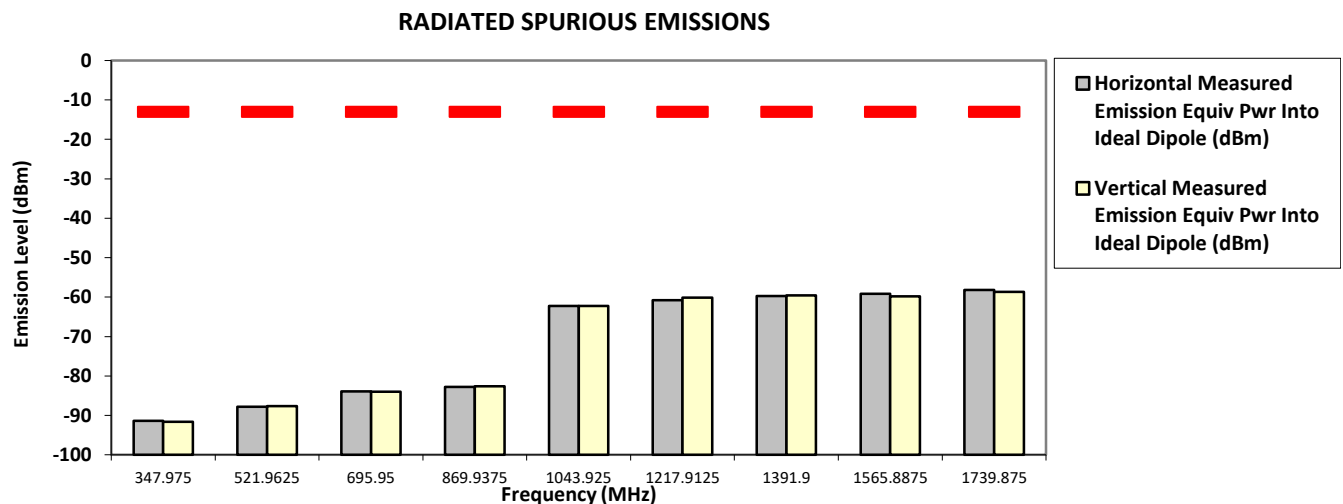

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

6.10.3. Test Result (Digital)

Not for FCC review

SAC Transmitter Radiated Emission:
 Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX APCO Digital C4FM
 138.012500 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-93.3857 **	-92.1345 **
414.0375	-20.0000	-90.3817 **	-88.4464 **
552.0500	-20.0000	-85.0250 **	-85.8699 **
690.0625	-20.0000	-84.5557 **	-84.4201 **
828.0750	-20.0000	-82.1706 **	-82.0147 **
966.0875	-20.0000	-80.9497 **	-80.5167 **
1104.1000	-20.0000	-60.3467 **	-62.0757 **
1242.1125	-20.0000	-60.1141 **	-60.2639 **
1380.1250	-20.0000	-59.6536 **	-59.5153 **

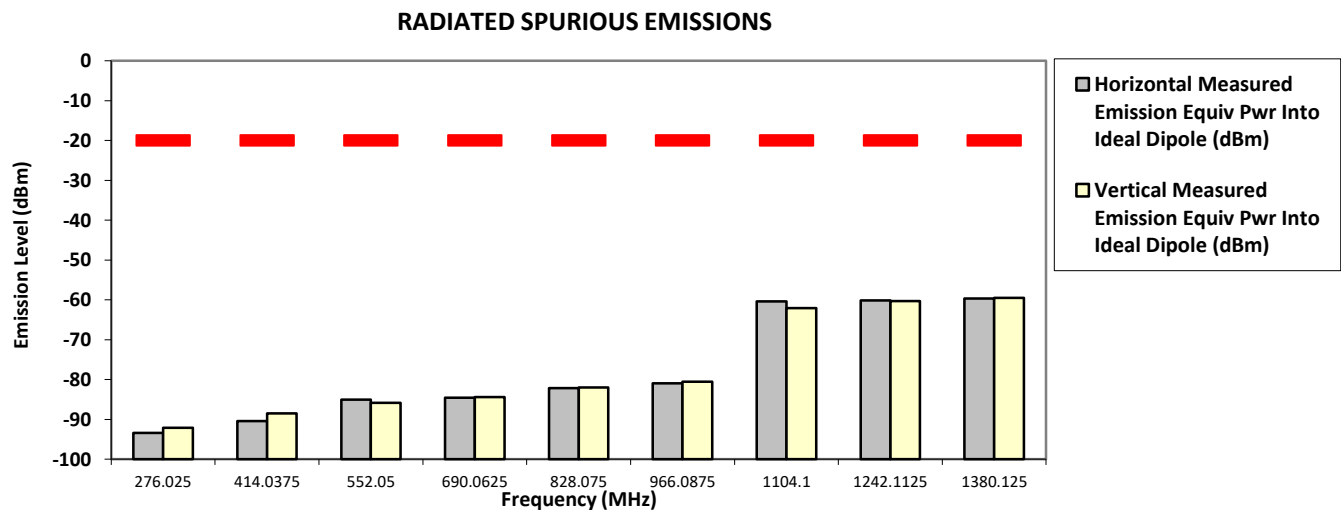

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8


System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN **S/N: 837TAFH446** **SR:06480-EMC-00052**
Battery Part No: PMNN4493A **Accy Part No: NA**
Test Mode: TX APCO Digital C4FM
158.550000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-92.9184 **	-91.9877 **
475.6500	-20.0000	-87.7936 **	-86.1207 **
634.2000	-20.0000	-84.6900 **	-83.9707 **
792.7500	-20.0000	-83.4972 **	-82.6397 **
951.3000	-20.0000	-82.2288 **	-80.4295 **
1109.8500	-20.0000	-61.2553 **	-61.1659 **
1268.4000	-20.0000	-60.0596 **	-60.8318 **
1426.9500	-20.0000	-59.5085 **	-59.7553 **
1585.5000	-20.0000	-58.7364 **	-59.8290 **

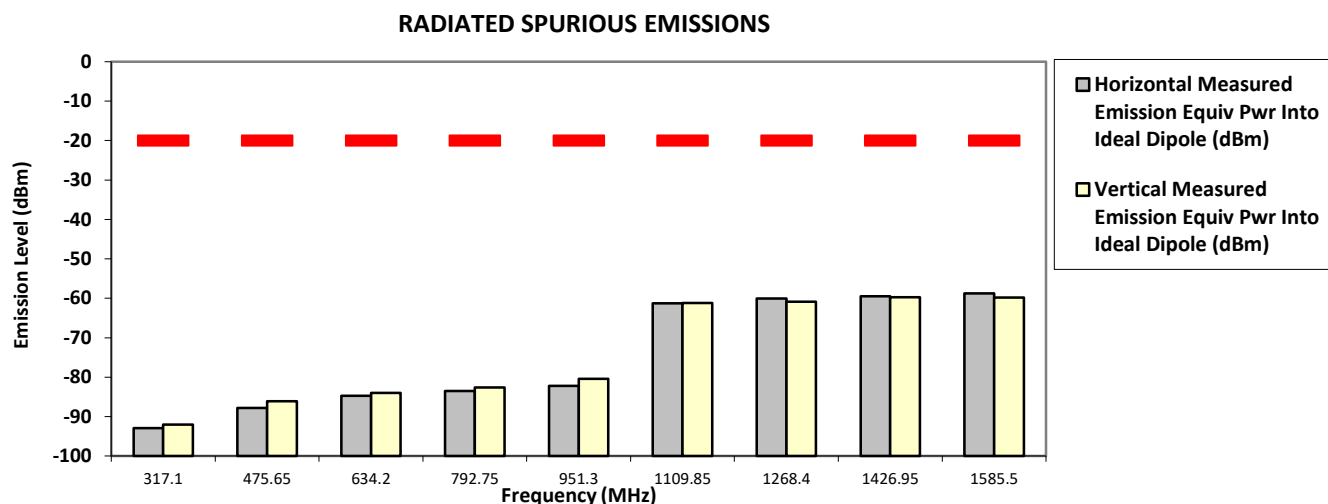

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital C4FM
158.550000 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-93.1712 **	-91.5930 **
475.6500	-20.0000	-87.4814 **	-88.7798 **
634.2000	-20.0000	-84.7942 **	-84.0459 **
792.7500	-20.0000	-83.3347 **	-83.8118 **
951.3000	-20.0000	-81.1942 **	-81.5459 **
1109.8500	-20.0000	-61.7550 **	-61.1970 **
1268.4000	-20.0000	-60.4372 **	-60.3207 **
1426.9500	-20.0000	-59.7007 **	-58.9743 **
1585.5000	-20.0000	-59.5729 **	-59.8187 **

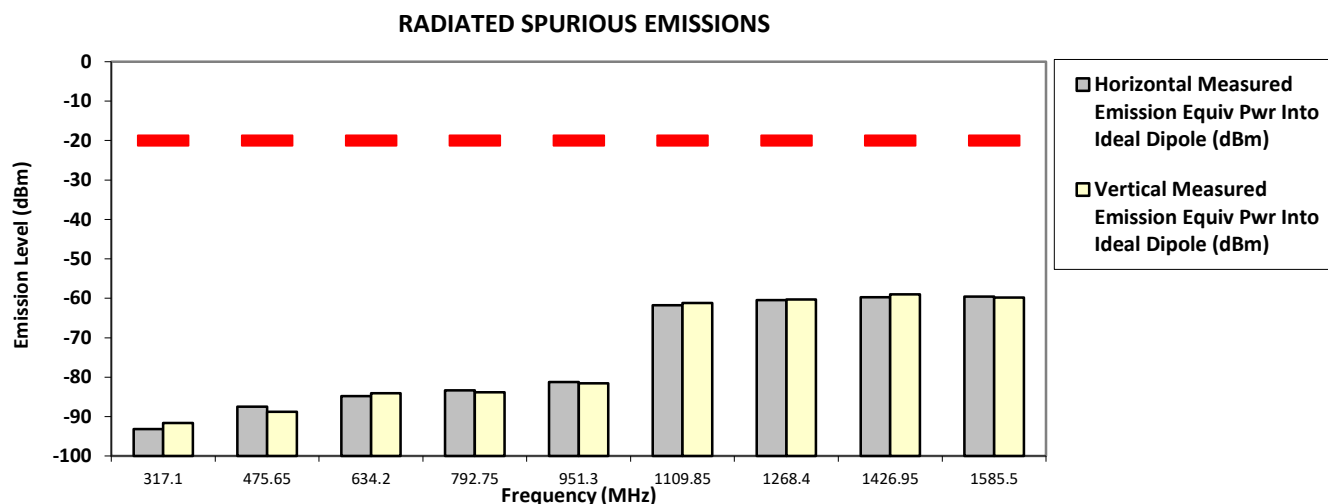

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks:


Passed Results

Marginal Results

Failed Results

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital C4FM
161.700000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-91.4822 **	-92.5714 **
485.1000	-20.0000	-88.1153 **	-87.4526 **
646.8000	-20.0000	-84.9902 **	-84.4586 **
808.5000	-20.0000	-83.4300 **	-83.4862 **
970.2000	-20.0000	-80.1253 **	-80.5675 **
1131.9000	-20.0000	-60.8275 **	-61.7964 **
1293.6000	-20.0000	-59.8518 **	-60.1091 **
1455.3000	-20.0000	-58.0082 **	-59.2088 **
1617.0000	-20.0000	-59.2499 **	-58.8571 **

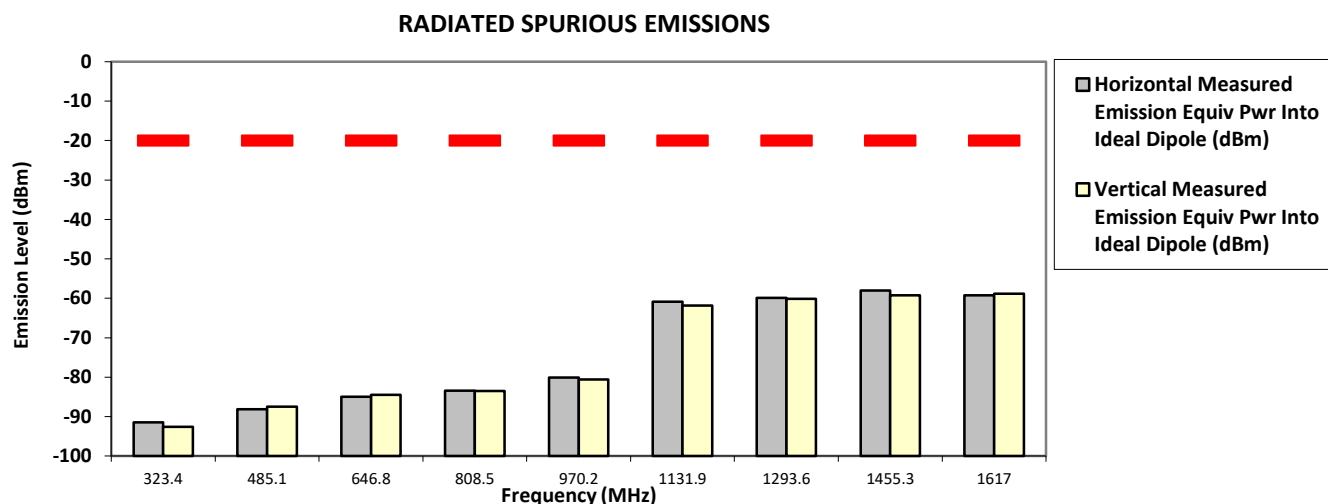

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
 Battery Part No: PMNN4493A Accy Part No: NA
 Test Mode: TX APCO Digital C4FM
 161.700000 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-91.1712 **	-93.0288 **
485.1000	-20.0000	-86.4886 **	-85.5291 **
646.8000	-20.0000	-83.0017 **	-85.1870 **
808.5000	-20.0000	-82.2368 **	-82.8241 **
970.2000	-20.0000	-79.9277 **	-81.0409 **
1131.9000	-20.0000	-61.8429 **	-60.1611 **
1293.6000	-20.0000	-59.1395 **	-60.0162 **
1455.3000	-20.0000	-59.3666 **	-59.2489 **
1617.0000	-20.0000	-59.8105 **	-58.1749 **

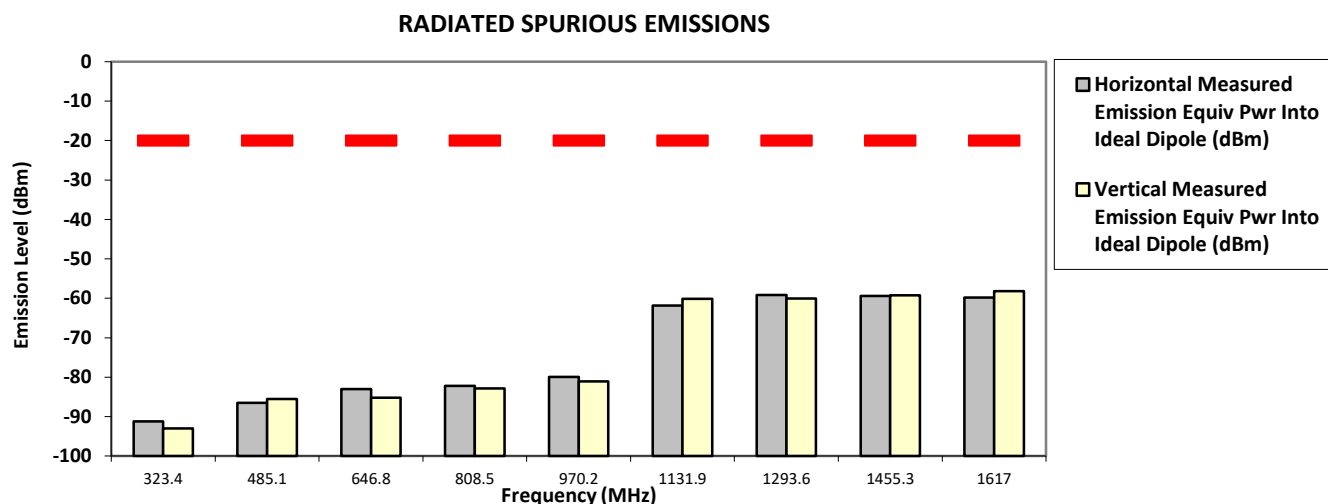

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8


System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN **S/N: 837TAFH446** **SR:06480-EMC-00052**
Battery Part No: PMNN4493A **Accy Part No: NA**
Test Mode: TX APCO Digital C4FM
173.387500 MHz **12.5 kHz** **5.900 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-91.0118 **	-91.5030 **
520.1625	-20.0000	-85.6004 **	-87.0206 **
693.5500	-20.0000	-85.5764 **	-84.6591 **
866.9375	-20.0000	-82.4662 **	-82.2269 **
1040.3250	-20.0000	-60.9448 **	-61.6471 **
1213.7125	-20.0000	-59.6648 **	-60.7121 **
1387.1000	-20.0000	-60.0261 **	-59.9169 **
1560.4875	-20.0000	-59.5929 **	-59.5852 **
1733.8750	-20.0000	-58.7868 **	-59.5261 **

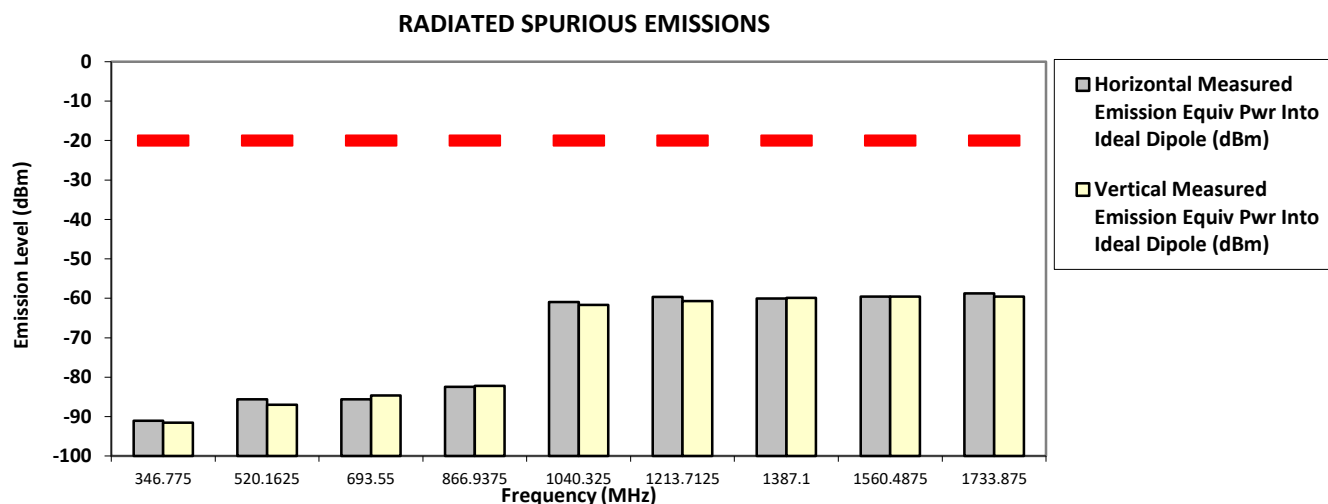

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 5 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Not for FCC review

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052


Battery Part No: PMNN4493A Accy Part No: NA

Test Mode: TX APCO Digital Phase II

138.012500 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-93.3300 **	-94.1386 **
414.0375	-20.0000	-89.6120 **	-89.2251 **
552.0500	-20.0000	-83.2471 **	-85.5959 **
690.0625	-20.0000	-83.2773 **	-83.9711 **
828.0750	-20.0000	-83.6886 **	-82.9288 **
966.0875	-20.0000	-80.2670 **	-79.4653 **
1104.1000	-20.0000	-61.2700 **	-61.1952 **
1242.1125	-20.0000	-59.0011 **	-59.8952 **
1380.1250	-20.0000	-58.6191 **	-59.0464 **

RADIATED SPURIOUS EMISSIONS

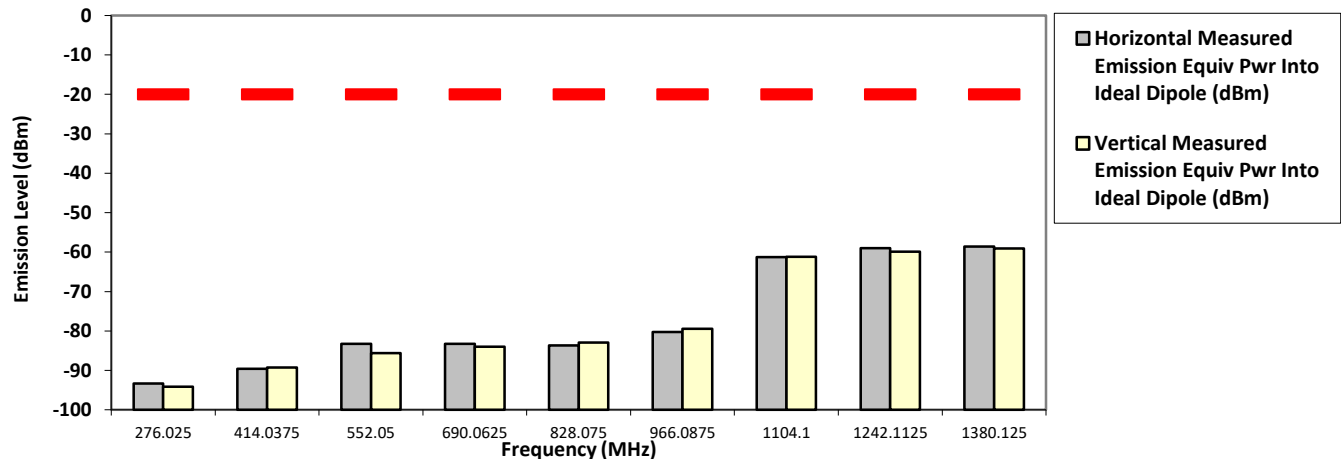

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H92KDH9PW7AN **S/N: 837TAFH446** **SR:06480-EMC-00052**
Battery Part No: PMNN4493A **Accy Part No: NA**
Test Mode: TX APCO Digital Phase II
158.550000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-92.4443 **	-91.9213 **
475.6500	-20.0000	-86.4051 **	-86.7826 **
634.2000	-20.0000	-84.4695 **	-83.9884 **
792.7500	-20.0000	-82.0043 **	-82.8945 **
951.3000	-20.0000	-81.7296 **	-80.9998 **
1109.8500	-20.0000	-60.8220 **	-60.6359 **
1268.4000	-20.0000	-59.6802 **	-60.3793 **
1426.9500	-20.0000	-58.4067 **	-59.0953 **
1585.5000	-20.0000	-58.8884 **	-59.5822 **

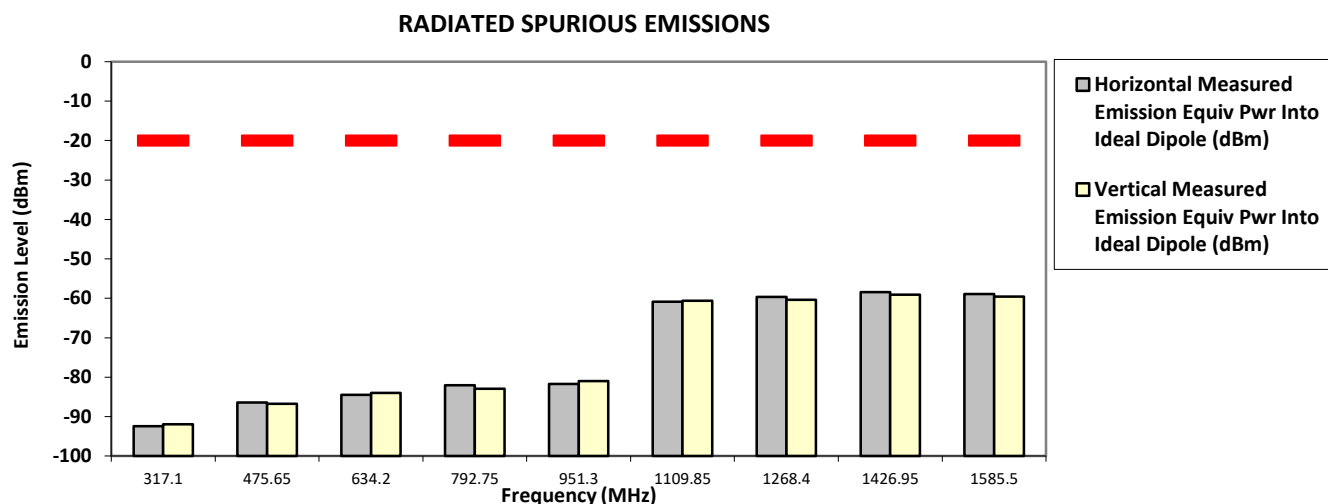

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital Phase II
158.550000 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-91.9523 **	-91.9523 **
475.6500	-20.0000	-87.2555 **	-87.3576 **
634.2000	-20.0000	-85.0974 **	-83.5963 **
792.7500	-20.0000	-82.9706 **	-82.2961 **
951.3000	-20.0000	-82.4616 **	-80.5963 **
1109.8500	-20.0000	-62.1895 **	-61.5157 **
1268.4000	-20.0000	-60.3394 **	-58.2446 **
1426.9500	-20.0000	-59.4623 **	-57.0525 **
1585.5000	-20.0000	-59.4054 **	-59.6399 **

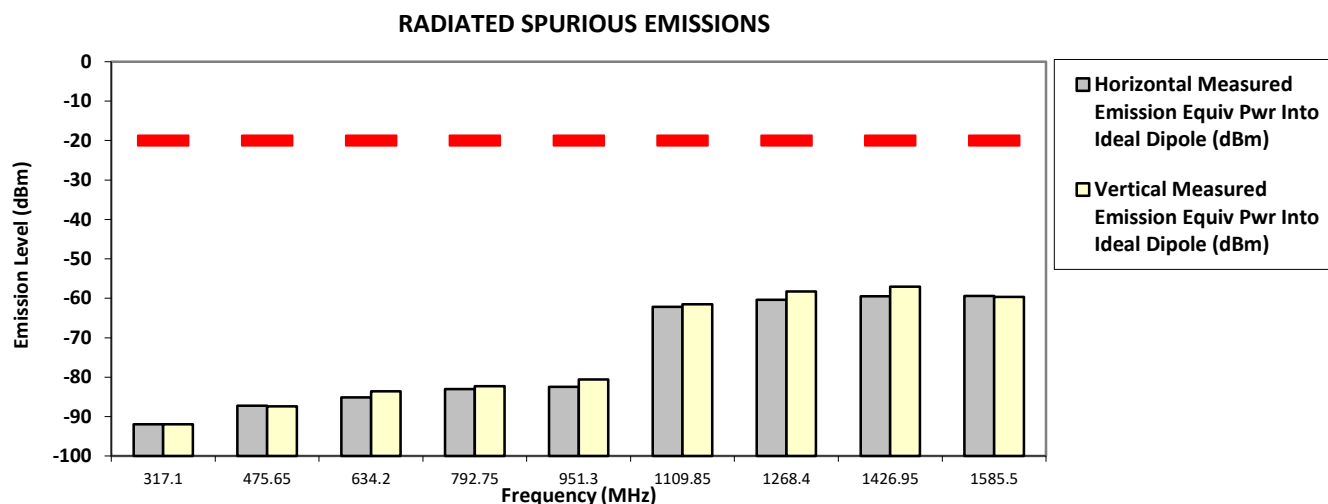

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital Phase II
161.700000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-92.0825 **	-92.7259 **
485.1000	-20.0000	-87.7442 **	-86.1914 **
646.8000	-20.0000	-84.8512 **	-84.4748 **
808.5000	-20.0000	-82.5609 **	-82.9051 **
970.2000	-20.0000	-80.7045 **	-80.9687 **
1131.9000	-20.0000	-60.8848 **	-61.5883 **
1293.6000	-20.0000	-59.4809 **	-58.6228 **
1455.3000	-20.0000	-58.1311 **	-58.7699 **
1617.0000	-20.0000	-59.4498 **	-59.5187 **

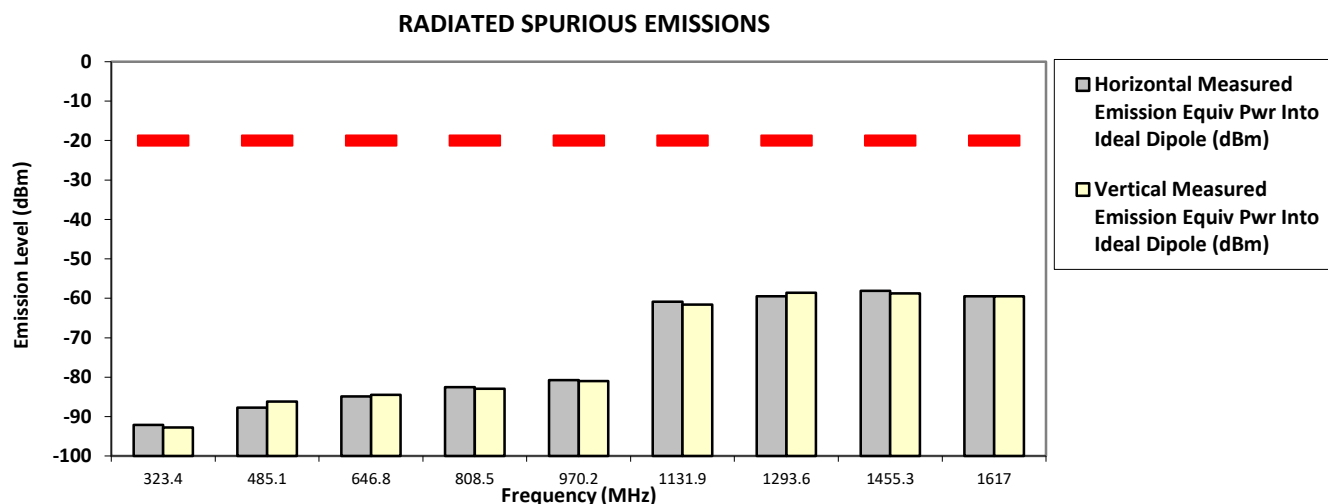

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital Phase II
161.700000 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-91.6059 **	-91.1594 **
485.1000	-20.0000	-87.0478 **	-88.3636 **
646.8000	-20.0000	-84.7445 **	-85.2158 **
808.5000	-20.0000	-81.3969 **	-82.6176 **
970.2000	-20.0000	-79.9650 **	-81.4557 **
1131.9000	-20.0000	-61.5885 **	-60.6934 **
1293.6000	-20.0000	-59.4855 **	-60.0698 **
1455.3000	-20.0000	-59.2656 **	-59.3778 **
1617.0000	-20.0000	-58.3140 **	-59.4634 **

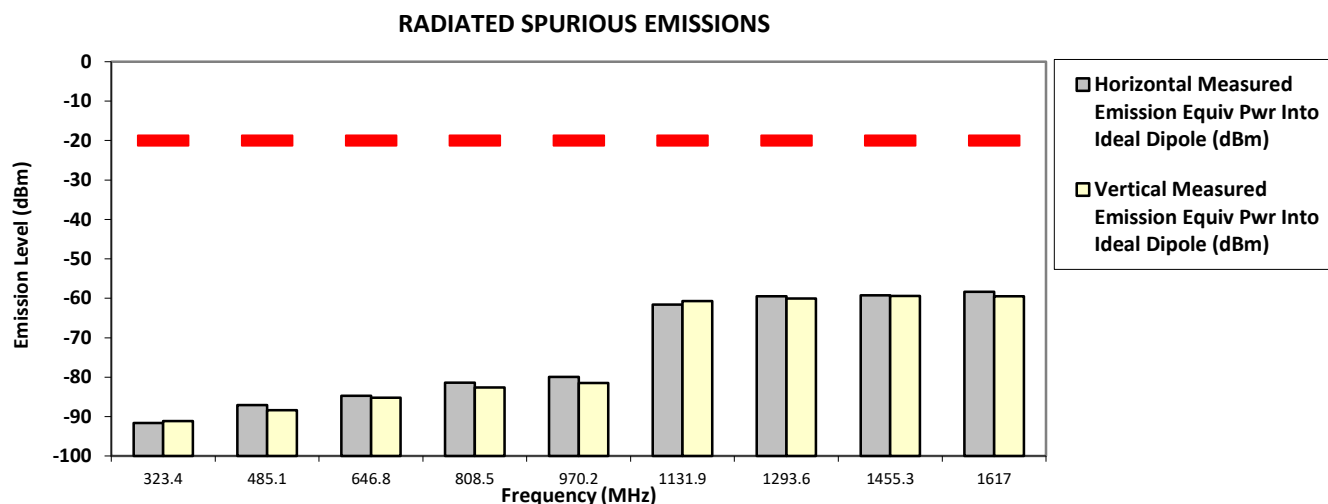

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks:


Passed Results

Marginal Results

Failed Results

SAC Transmitter Radiated Emission:
Model Number: H92KDH9PW7AN S/N: 837TAFH446 SR:06480-EMC-00052
Battery Part No: PMNN4493A Accy Part No: NA
Test Mode: TX APCO Digital Phase II
173.387500 MHz 12.5 kHz 5.900 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-92.1555 **	-91.0536 **
520.1625	-20.0000	-87.4617 **	-87.4247 **
693.5500	-20.0000	-83.7747 **	-84.8532 **
866.9375	-20.0000	-81.7002 **	-82.3787 **
1040.3250	-20.0000	-61.4650 **	-61.4228 **
1213.7125	-20.0000	-61.3503 **	-60.5728 **
1387.1000	-20.0000	-60.2005 **	-59.9634 **
1560.4875	-20.0000	-59.2254 **	-58.4848 **
1733.8750	-20.0000	-59.0998 **	-59.8598 **

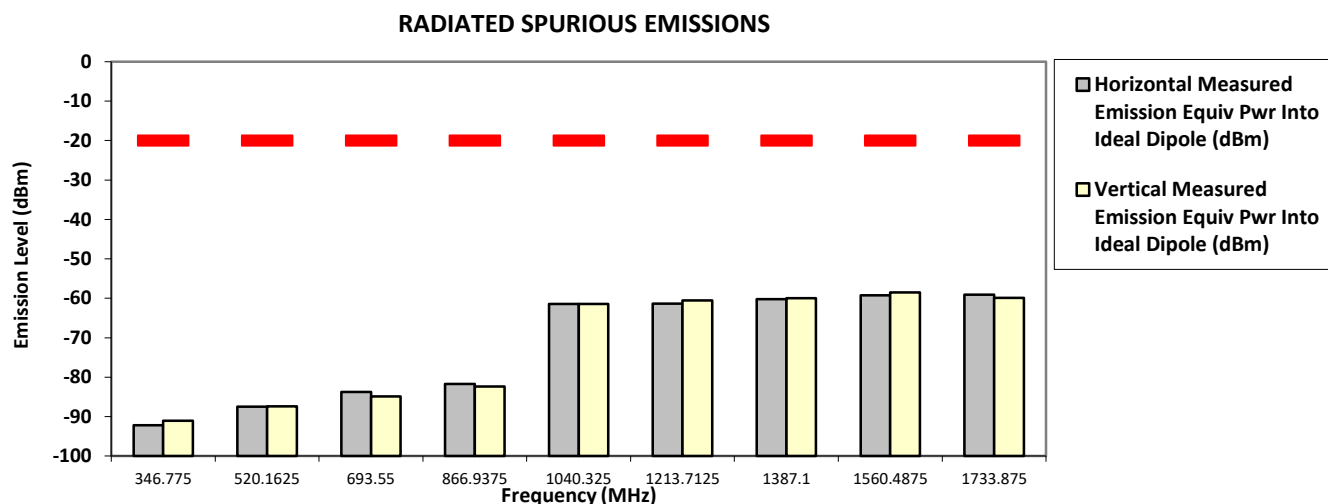

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Fri, 6 Dec, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 21.3 Hum(%RH): 62.8

System MU: 4.03 dB

Remarks:

Passed Results

Marginal Results

Failed Results

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	Not Applicable	50 + log10(P) (-20 dBm)	43 + log10(P) (-13 dBm)
25kHz		Not Applicable		43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log10(P) (-13 dBm)	Not Applicable	50 + log10(P) (-20 dBm)	43 + log10(P) (-13 dBm)
25kHz	Not Applicable	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)	43 + log10(P) (-13 dBm)

6.11. Effective Radiated Power (ERP)

6.11.1. Test Setup

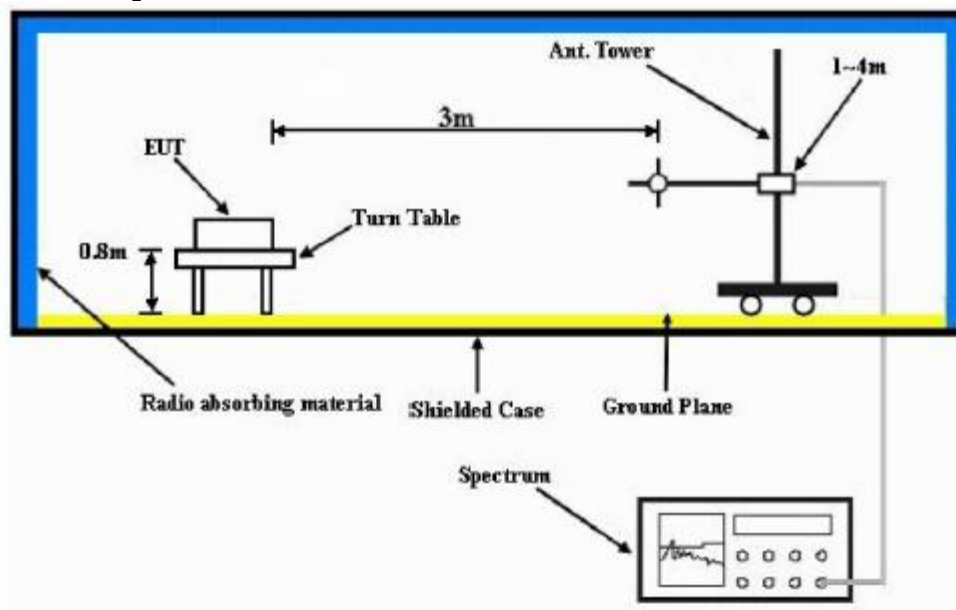

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


6.11.2. Test Result Not Applicable

6.11.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.12. GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

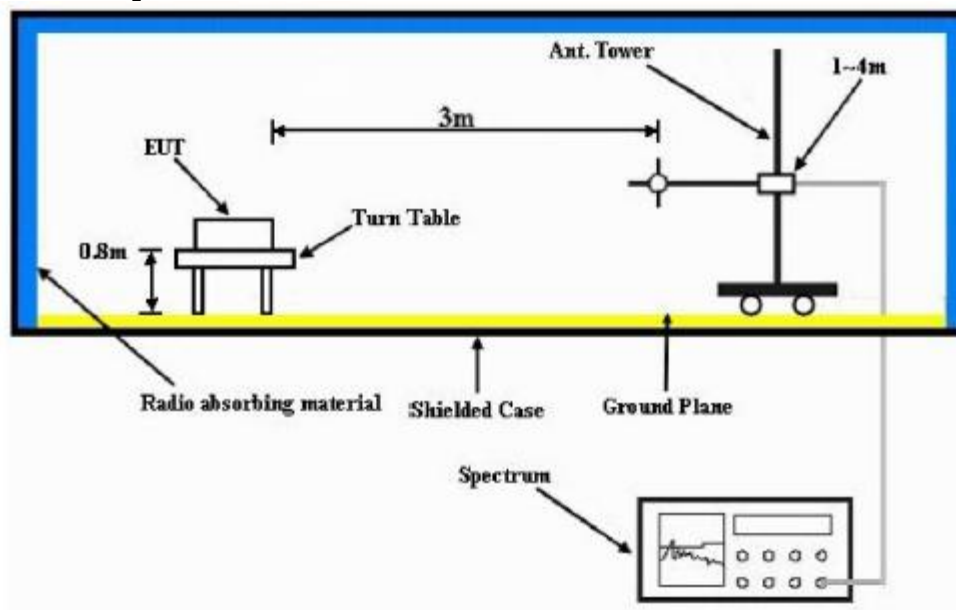

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.1. Test Result Not Applicable

6.12.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~