

 MOTOROLA SOLUTIONS	    CERTIFICATE 2518.08 SAMM 825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.C																																
<table><tr><td>Date/s Tested</td><td>: 21-April-2024 - 07-May-2024</td></tr><tr><td>Report Issue Date</td><td>: 19-August-2024</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: CADOGAN SEAN</td></tr><tr><td>Product Type</td><td>: Hand-held</td></tr><tr><td>Product Marketing Name (PMN)</td><td>: APX N70</td></tr><tr><td>Hardware Version Identification Number (HVIN)</td><td>: H35KET9PW8AN & H35KET9PW8AN-H</td></tr><tr><td>Frequency Band</td><td>: 136-174MHz</td></tr><tr><td>Max RF Output Power</td><td>: 6.6 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version Identification Number (FVIN)</td><td>: D03.75.46</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182</td><td>PASS</td></tr></table>		Date/s Tested	: 21-April-2024 - 07-May-2024	Report Issue Date	: 19-August-2024	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: CADOGAN SEAN	Product Type	: Hand-held	Product Marketing Name (PMN)	: APX N70	Hardware Version Identification Number (HVIN)	: H35KET9PW8AN & H35KET9PW8AN-H	Frequency Band	: 136-174MHz	Max RF Output Power	: 6.6 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version Identification Number (FVIN)	: D03.75.46	(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182	PASS
Date/s Tested	: 21-April-2024 - 07-May-2024																																
Report Issue Date	: 19-August-2024																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: CADOGAN SEAN																																
Product Type	: Hand-held																																
Product Marketing Name (PMN)	: APX N70																																
Hardware Version Identification Number (HVIN)	: H35KET9PW8AN & H35KET9PW8AN-H																																
Frequency Band	: 136-174MHz																																
Max RF Output Power	: 6.6 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version Identification Number (FVIN)	: D03.75.46																																
(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12 / 182	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Farah Nur Arina Test Personnel	Approved Signatory: Maheshvaran A/L Rajagopal Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	14
6.3. Modulation Characteristics	15
6.3.1. Test Setup	15
6.3.2. Test Result	16
6.3.3. Test Limit.....	17
6.4. Modulation Limiting.....	18
6.4.1. Test Setup	18
6.4.2. Test Result	19
6.4.3. Test Limit.....	19
6.5. Occupied Bandwidth.....	20
6.5.1. Test Setup (Analog)	20
6.5.2. Test Result (Analog).....	21
6.5.3. Test Setup (Digital).....	27
6.5.4. Test Result (Digital).....	28
6.5.5. Test Limit.....	36
6.6. Band Edge Conducted Spurious Emission (Part 22)	37
6.6.1. Test Setup (Analog)	37
6.6.2. Test Result (Analog).....	38
6.6.3. Test Setup (Digital).....	39
6.6.4. Test Result (Digital).....	40
6.6.5. Test Limit.....	41
6.7. Transient Frequency Behavior	42
6.7.1. Test Setup	42
6.7.2. Test Result	43
6.7.3. Test Limit.....	45
6.8. Adjacent Channel Power.....	46
6.8.1. Test Setup (Analog)	46
6.8.2. Test Result	46
6.8.3. Test Setup (Digital).....	47

6.8.4.	Test Result	47
6.8.5.	Test Limit.....	48
6.9.	Conducted Spurious Emission	50
6.9.1.	Test Setup	50
6.9.2.	Test Result (Analog)	51
6.9.3.	Test Result (Digital).....	56
6.9.4.	Test Limit.....	63
6.10.	Radiated Spurious Emission	70
6.10.1.	Test Setup	70
6.10.2.	Test Result (Analog)	71
6.10.3.	Test Result (Digital).....	77
6.10.4.	Test Limit.....	79
6.11.	Effective Radiated Power (ERP)	90
6.11.1.	Test Setup	90
6.11.2.	Test Result	90
6.11.3.	Test Limit.....	90
6.12.	GNSS (EIRP for 1559 - 1610MHz).....	91
6.12.1.	Test Setup	91
6.12.1.	Test Result	91
6.12.2.	Test Limit.....	91

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	12-June-2024	Farah
Rev. B	Update Hardware Version Identification Number (HVIN) from H35KET9PW8AN to H35KET9PW8AN & H35KET9PW8AN-H, Remove Note 1 in Page 5, Change Power for Maritime from 1.97W and 1.23A to 5.79W and 2.22A, Change the ppm limit from 0.5ppm to 5.0ppm for Frequency Stability	09-August-2024	Farah
Rev. C	Update Emission designator and add noise floor remark for Radiated Spurious Emission on Summary of Test Results table	19- August -2024	Farah

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
UL 3650mAH (using RN 2170 Li-Ion cell)	MOTOROLA	PMNN4818A
VHF 1/4 wave antenna 136-174 MHz 136-174MHz	MOTOROLA	AN000414A01

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046(a), 22.565(f), 74.461, 80.215	RSS-119	RF Power Output	Pass		022TAF1520
2.1055, 22.355, 74.464, 80.209	RSS-119	Frequency Stability	Pass		022TAF1520
2.1047	-	Audio Frequency Response	Pass		022TAF1520
2.1047	-	Audio Low Pass Filter Response	Pass		022TAF1520
2.1047, 74.463, 80.213	-	Modulation limiting	Pass		022TAF1520
2.1049, 22.359, 90.21, 74.462, 80.211(b), (c)	RSS-119 RSS-182	Occupied Bandwidth	Pass	20KF1E: 10.3901 kHz 16K0F3E: 14.9948 kHz 11K0F3E: 9.9498 kHz 8K10F1D: 7.8861 kHz 8K10F1E: 6.4671 kHz 8K10F1W: 10.3901 kHz	022TAF1520
2.1051, 22.359 (a), (b)	-	Band Edge Conducted Spurious Emission	Pass		022TAF1520
90.214	RSS-119	Transient Frequency Behavior	Pass		022TAF1520
90.543(a), (b)	RSS-119	Adjacent Channel Power	NA		
2.1051, 22.359, 90.210 74.462(c), 80.211(c)	RSS-119	Conducted Spurious Emissions	Pass	Worst case: -43.17 dBm	022TAF1520
2.1051, 22.359, 74.462(c), 80.211(f)	RSS-119	Radiated Spurious Emission	Pass	Worst case: -59.1517 dBm (margin: 39.1517 dBm, Noise Floor)	022TAF1508
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: FCC_Analog_v2.5.0)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
CHAMBER	SH-641	92009188	04-Mar-24	04-Mar-25
POWER SUPPLY	6032A	3232A08410	20-Jun-23	20-Jun-24
CXA SIGNAL ANALYZER	N9000B	MY60251574	20-May-23	20-May-24
AUDIO ANALYZER	U8903B	MY61070005	21-Jun-23	21-Jun-24
POWER METER	E4416A	GB41293240	03-Mar-24	03-Mar-25
POWER SENSOR	E4412A	MY50260020	22-Nov-23	22-Nov-24
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.2.1)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
SWITCH CONTROL UNIT	3488A	2719A36210	Not Required	Not Required
ATTENUATOR / SWITCH DRIVER	11713A	3748A09090	Not Required	Not Required
POWER SENSOR	E9301B	MY50180003	20-Jun-23	20-Jun-24
STEP ATTENUATOR	8496G	MY52300757	20-Jun-23	20-Jun-24
SIGNAL GENERATOR	8657A	3250A05137	22-Jun-23	22-Jun-24
MODULATION ANALYZER	8901B	3749A05886	26-Sep-23	26-Sep-24
ATTENUATOR/110DB	8494G	MY52300115	20-Aug-23	20-Aug-24
POWER SUPPLY	6031A	3313A02714	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4443A	MY46181974	01-Dec-23	01-Dec-24
POWER METER	E4416A	GB41293866	09-Jan-24	09-Jan-25
AUDIO ANALYZER	8903B	3011A12380	29-Dec-23	29-Dec-24
CXA SIGNAL ANALYZER	N9000B	MY60250530	12-Dec-23	12-Dec-24
AUDIO ANALYZER	8903B	2836A05866	09-Feb-24	09-Feb-25
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.05)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
SWITCH CONTROL UNIT	3488A	2719A32735	Not Required	Not Required
INTERFACE BOX - FILTER	NA	CS001	Not Required	Not Required
POWER SUPPLY	6031A	3506A03271	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4440A	MY46186938	20-Oct-23	20-Oct-24
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

RADIATED EMISSION CHAMBER #1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	NR973A	MY54180189	30-Aug-23	30-Aug-24
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	11-Aug-23	11-Aug-24
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112B	2950	14-Dec-23	14-Dec-24
BILOG ANTENNA	CBL6112B	2964	25-Sep-23	25-Sep-24
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	21-Jun-23	21-Jun-24
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	28-Aug-2023	28-Aug-2024
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	Not Required	Not Required
PREAMPLIFIER	PAM-0118P	269	28-Jun-23	28-Jun-24
LOOP ANTENNA	6502	00208416	26-Oct-23	26-Oct-24
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.5			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	FM	138.0125, 158.55, 161.7, 173.9875	Farah	23.4°C, 50%RH
Frequency Stability	Max	FM	158.55	Farah	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	FM	158.55	Farah	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	FM	158.55	Farah	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	FM	158.55	Farah	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	138.0125, 158.55, 161.7, 173.3875, 173.9875	Farah	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	157.77, 158.67	Farah	23.4°C, 50%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	FM/C4FM	158.55	Farah	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	NA	NA	NA	23.4°C, 50%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	158.550	Farah	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	138.0125, 158.55, 161.7, 173.9875	Nazrin & Zarif	23.4°C, 50%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA		

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

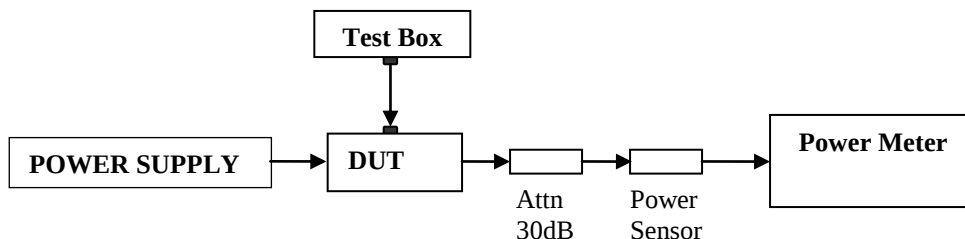


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	7.5V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
138.0125	1.00	0.87	6.45	1.83	Not for FCC review Part 80
158.55000	1.00	0.99	6.45	2.04	
158.55000	1.00	0.96	5.79	2.22	
161.70000	1.00	0.93	6.42	2.04	
173.98750	1.00	0.78	6.42	1.83	

6.2. Frequency Stability

6.2.1. Test Setup

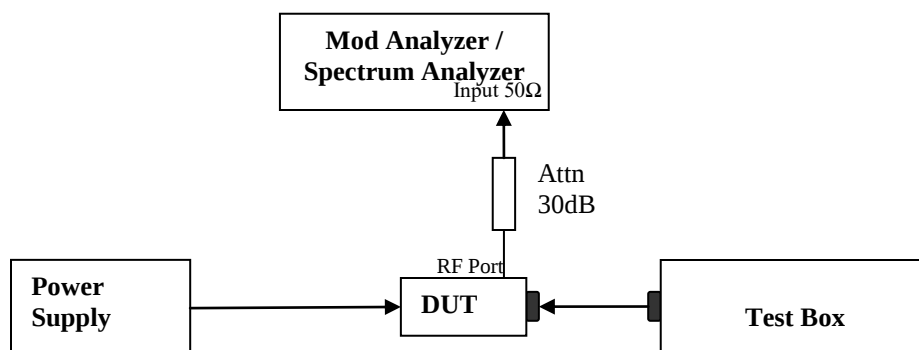


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

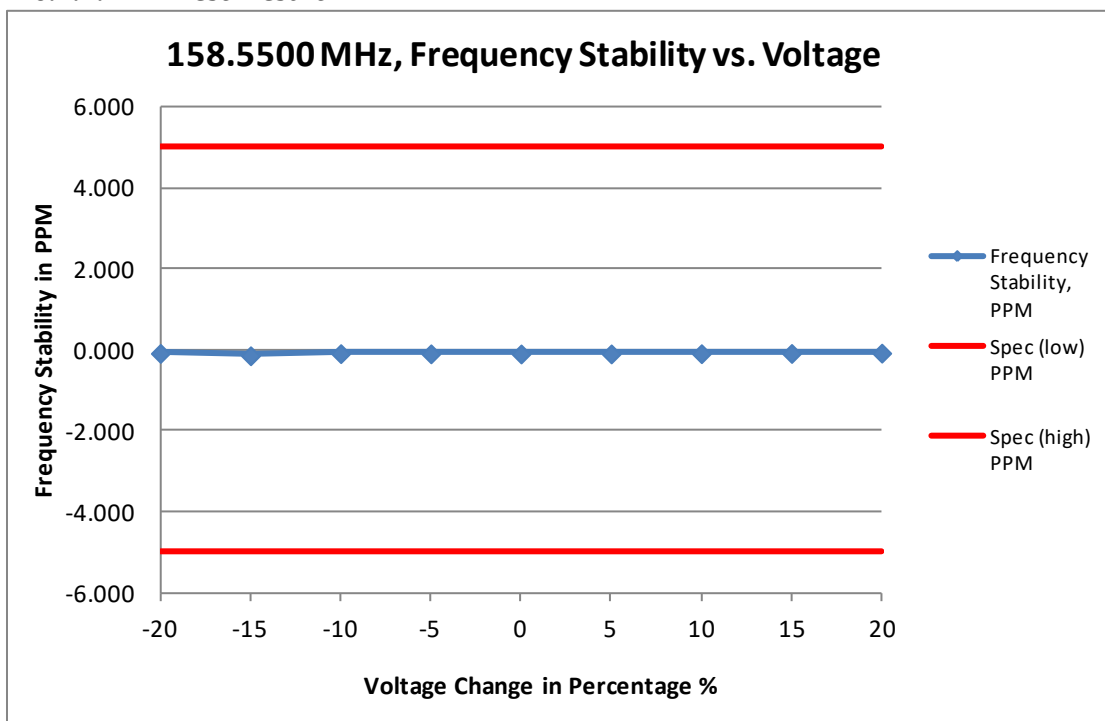

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing		158.5500 MHz / 12.5 kHz			
Temperature, °C		25			
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	4.440	158.549990	-0.063	-5.000	5.000
-15	6.370	158.549981	-0.122	-5.000	5.000
-10	6.750	158.549989	-0.069	-5.000	5.000
-5	7.120	158.549988	-0.074	-5.000	5.000
0	7.500	158.549988	-0.077	-5.000	5.000
5	7.870	158.549988	-0.076	-5.000	5.000
10	8.250	158.549989	-0.070	-5.000	5.000
15	8.620	158.549990	-0.065	-5.000	5.000
20	9.000	158.549991	-0.057	-5.000	5.000

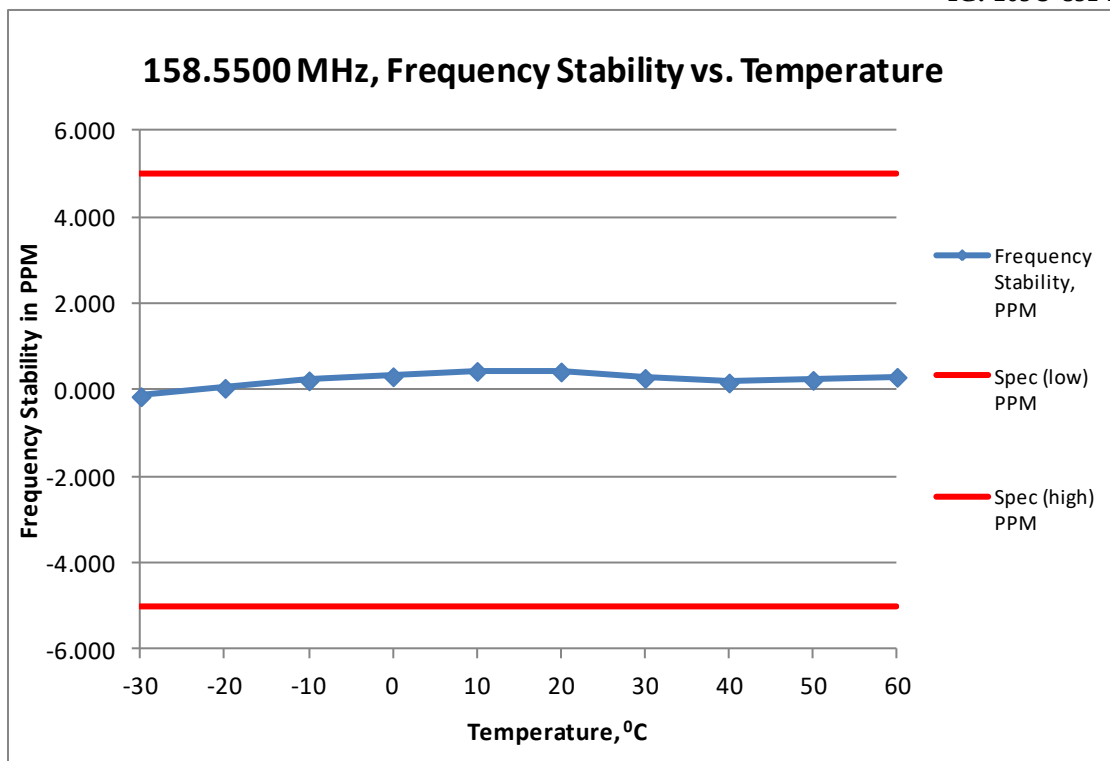

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	158.549979	-0.133	-5.000	5.000
-20	158.550010	0.062	-5.000	5.000
-10	158.550037	0.235	-5.000	5.000
0	158.550052	0.330	-5.000	5.000
10	158.550072	0.453	-5.000	5.000
20	158.550070	0.441	-5.000	5.000
30	158.550046	0.292	-5.000	5.000
40	158.550029	0.186	-5.000	5.000
50	158.550039	0.246	-5.000	5.000
60	158.550050	0.317	-5.000	5.000

6.2.3. Test Limit

As per manufacturer declared spec +/- 5.0ppm


6.3. Modulation Characteristics

6.3.1. Test Setup

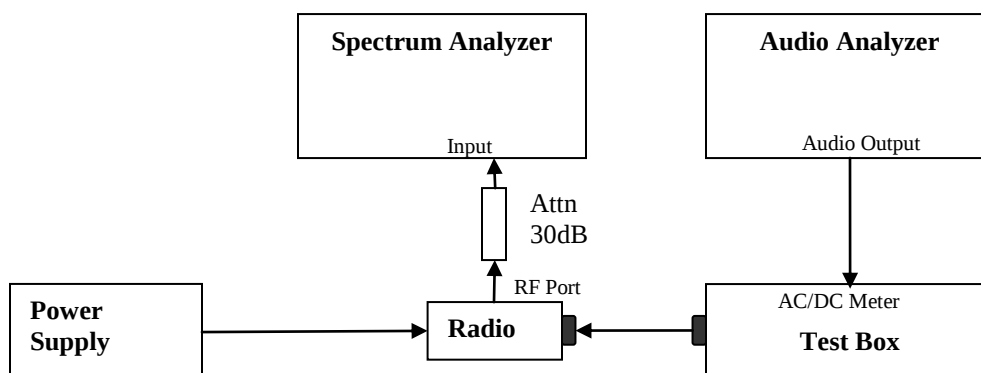


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as 0dB reference
- 6) Vary the audio frequency from 300 Hz to 20 kHz. Record the change in modulation in reference to step 5.


6.3.2. Test Result

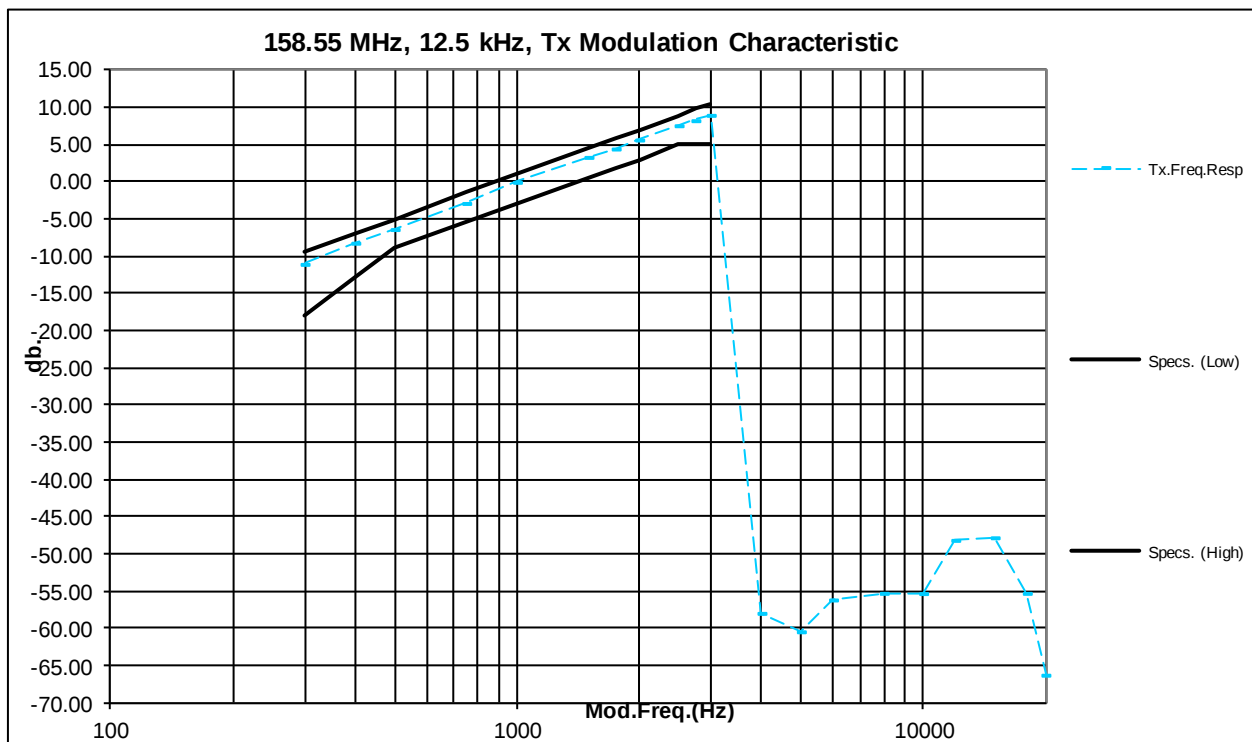

Not for FCC review

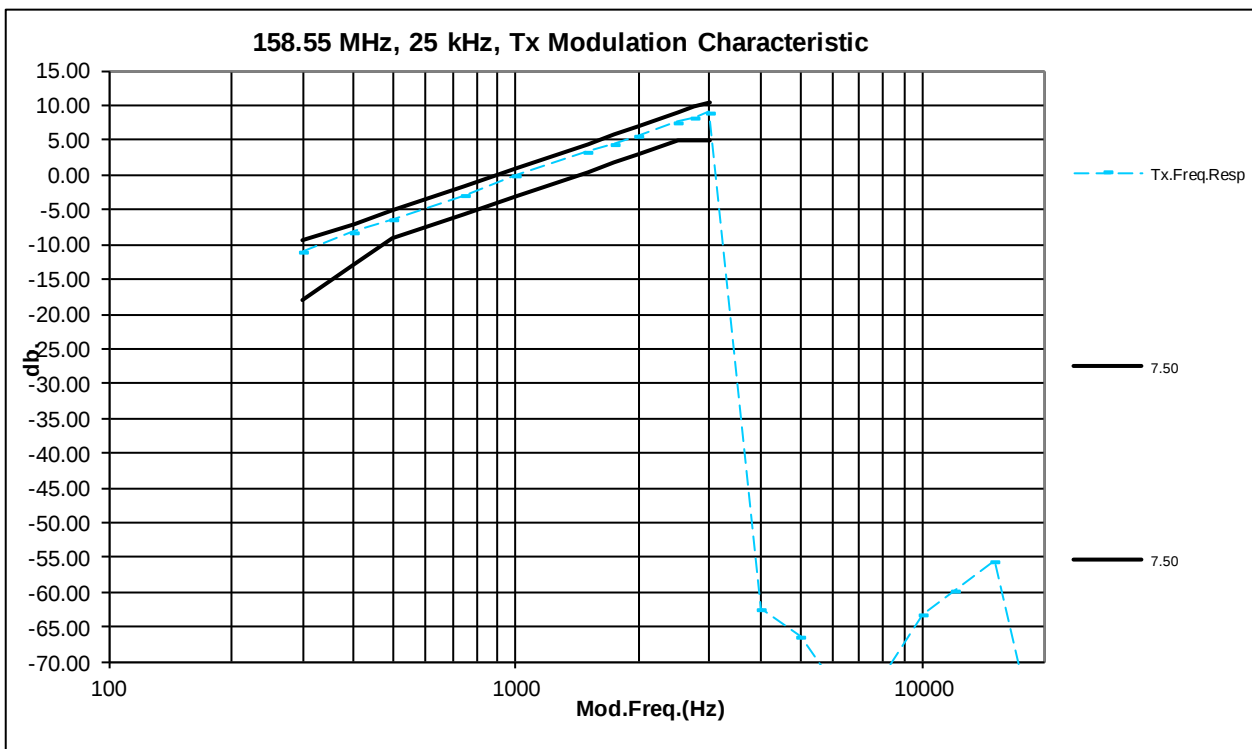

6.3.3. Test Limit

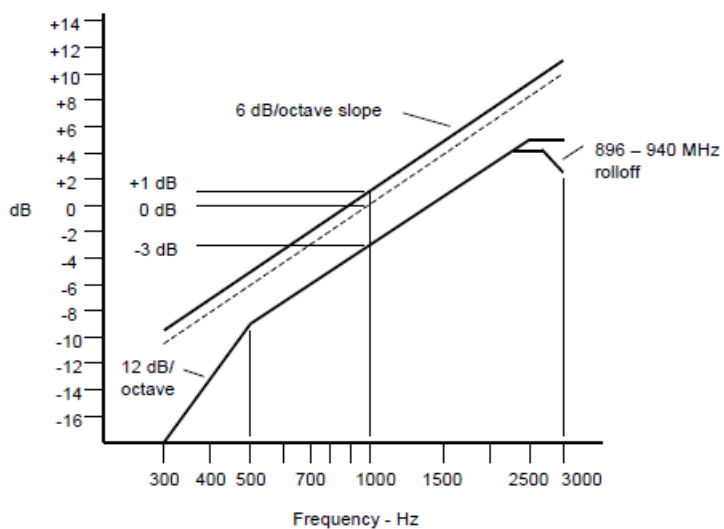


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


6.4. Modulation Limiting

6.4.1. Test Setup

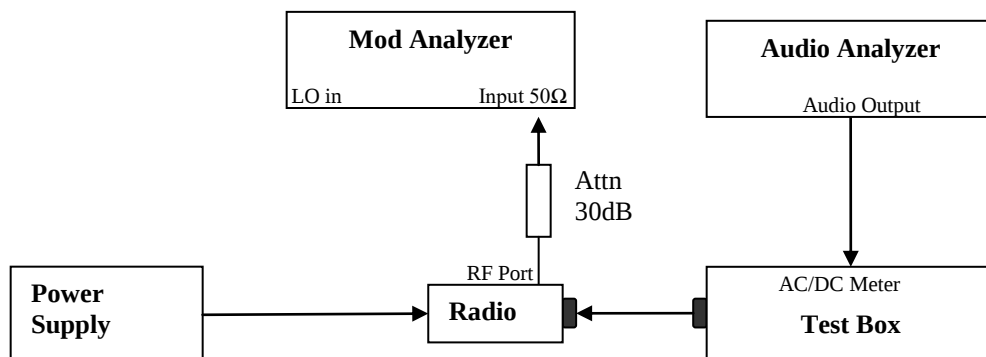


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.4.2. Test Result

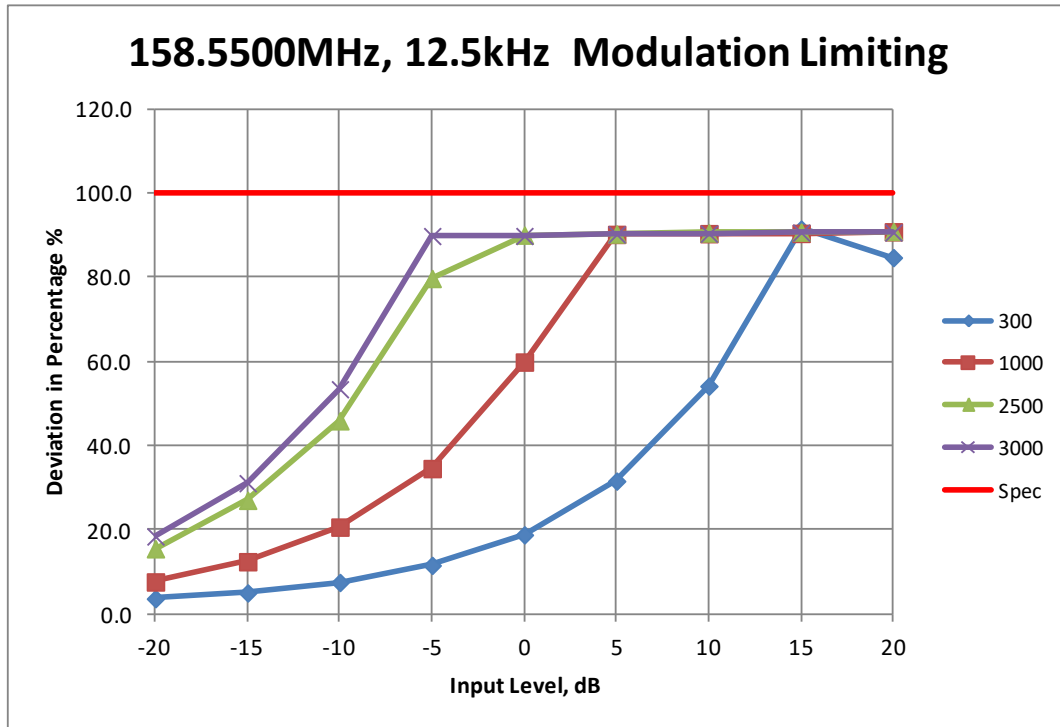

Not for FCC review

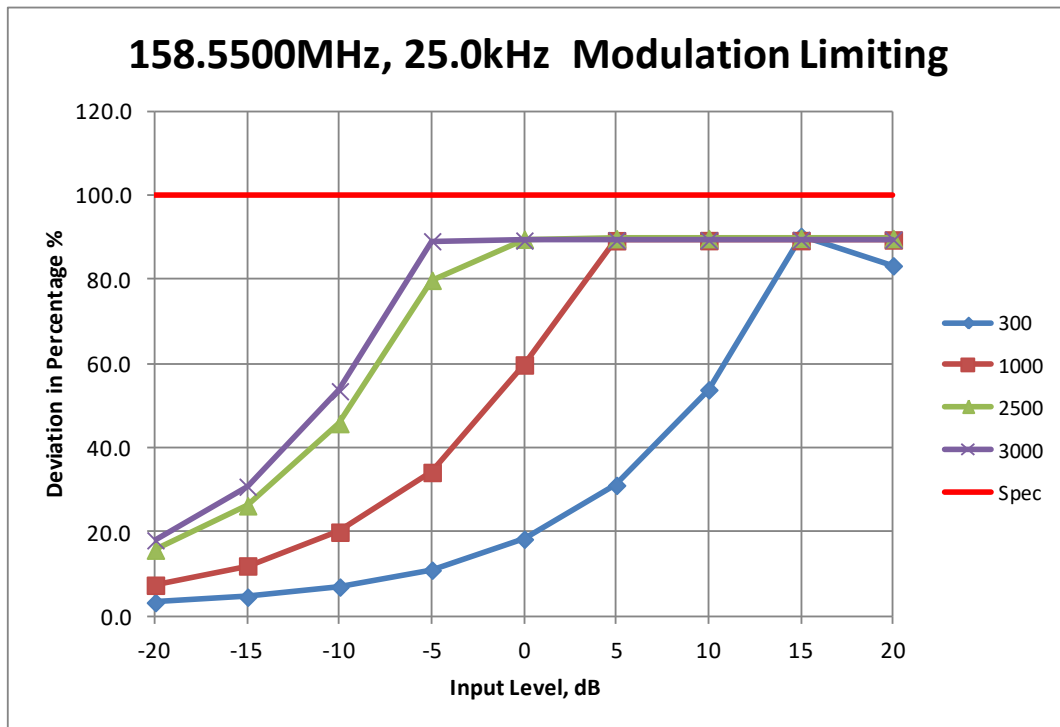


6.4.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.5. Occupied Bandwidth

6.5.1. Test Setup (Analog)

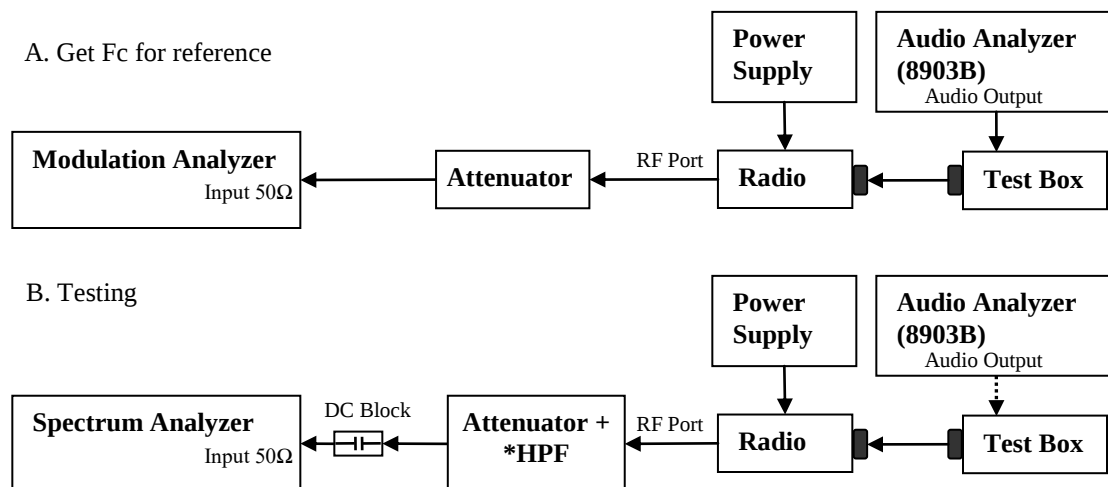

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.5.2. Test Result (Analog)

Standard Audio Modulation (25 kHz Channelization, Analog Voice):
 Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} = 16K0F3E$ portion of the designator indicates voice.


Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E.



Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):
 Emission Designator 11K0F3E



In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.



$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0F3E$ portion of the designator indicates voice.



Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

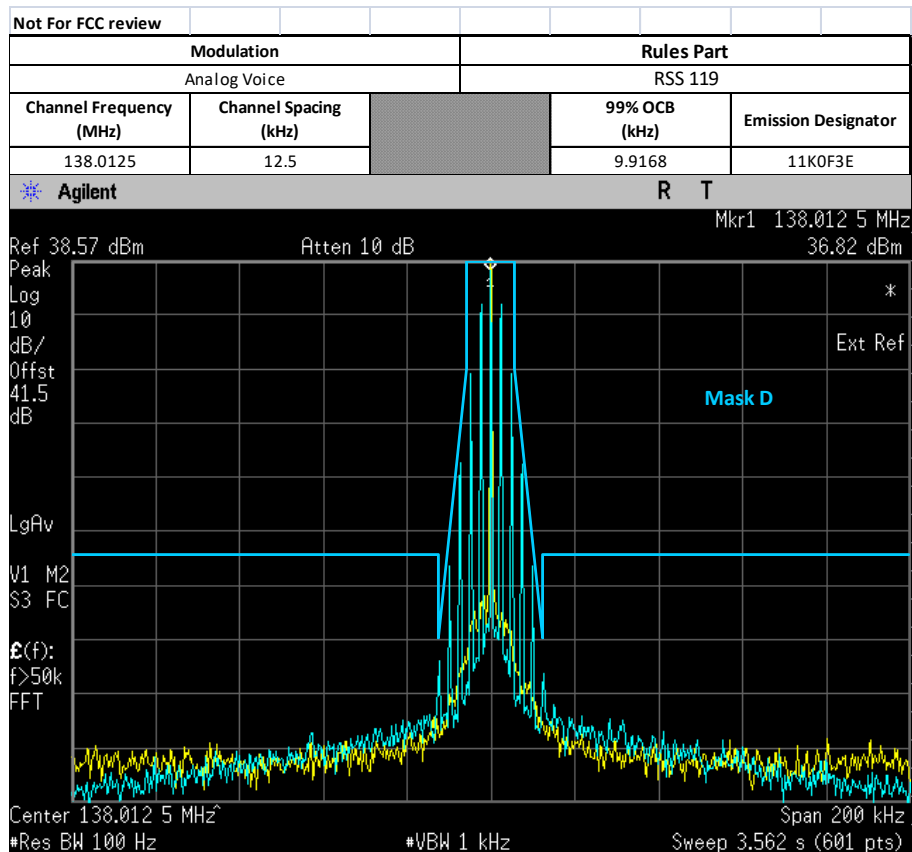

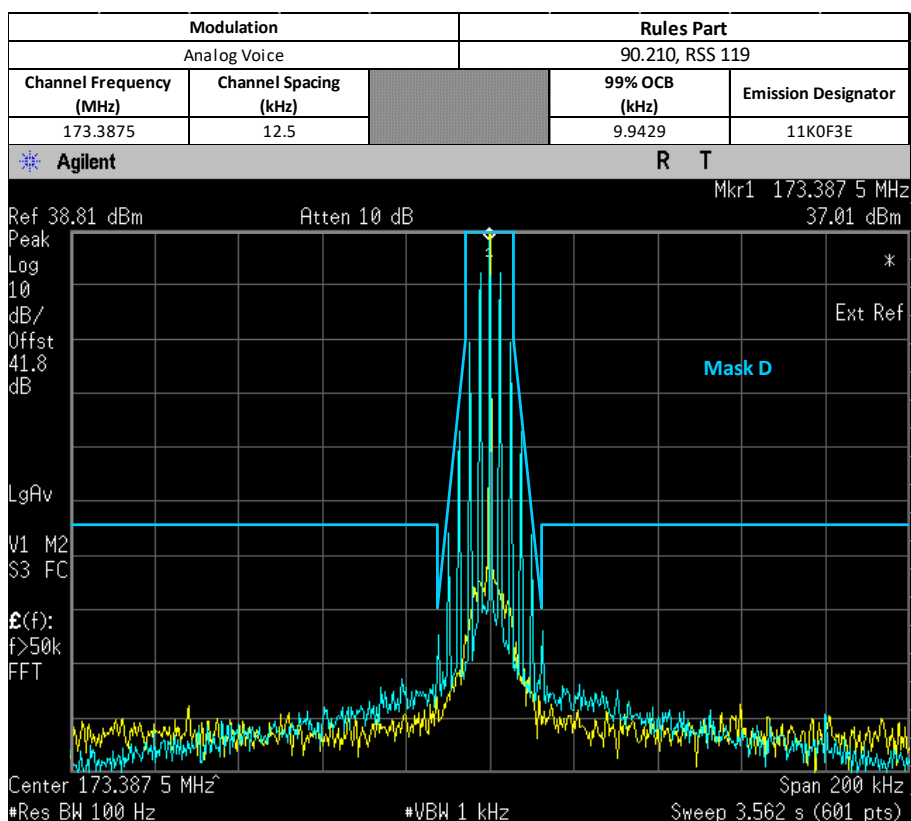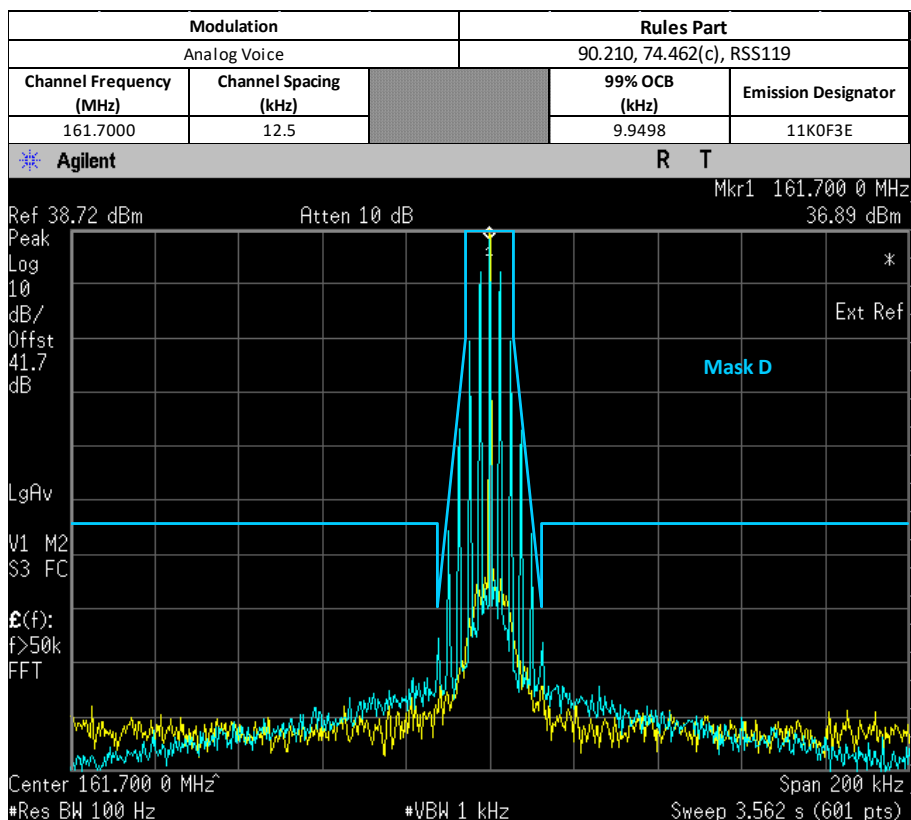


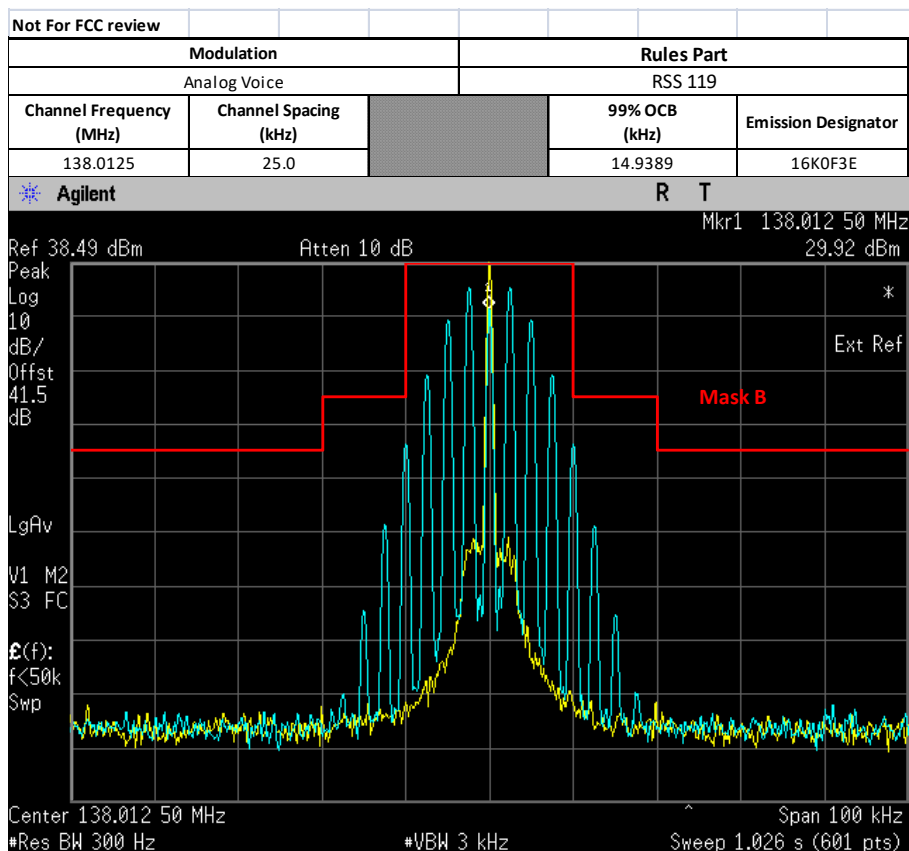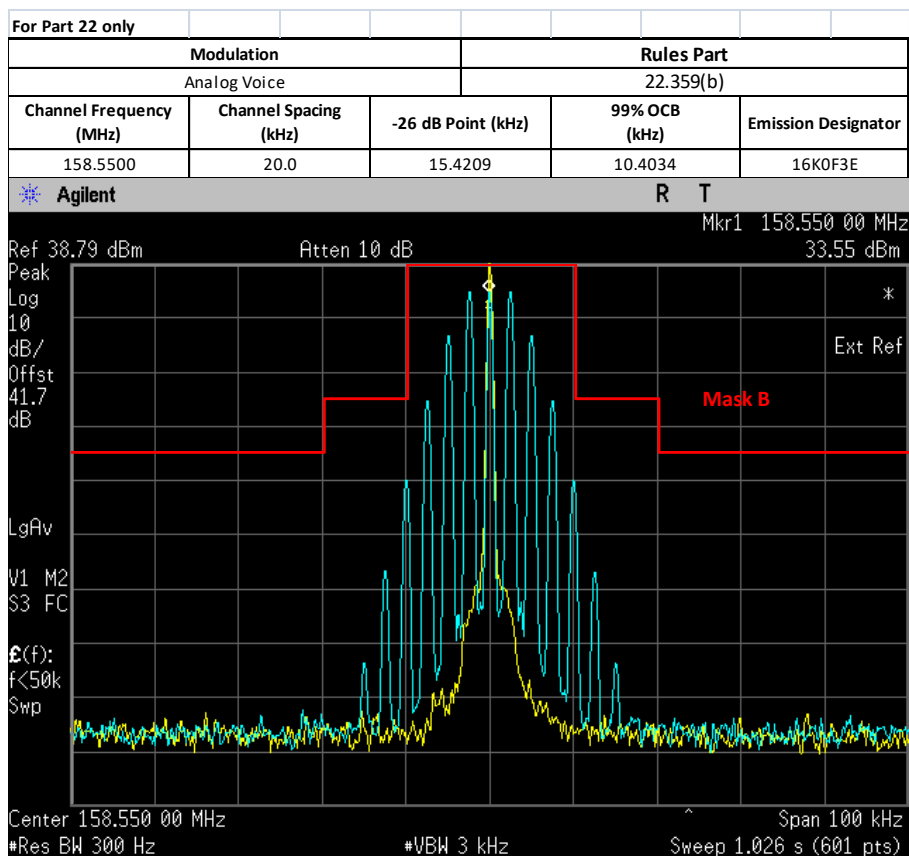

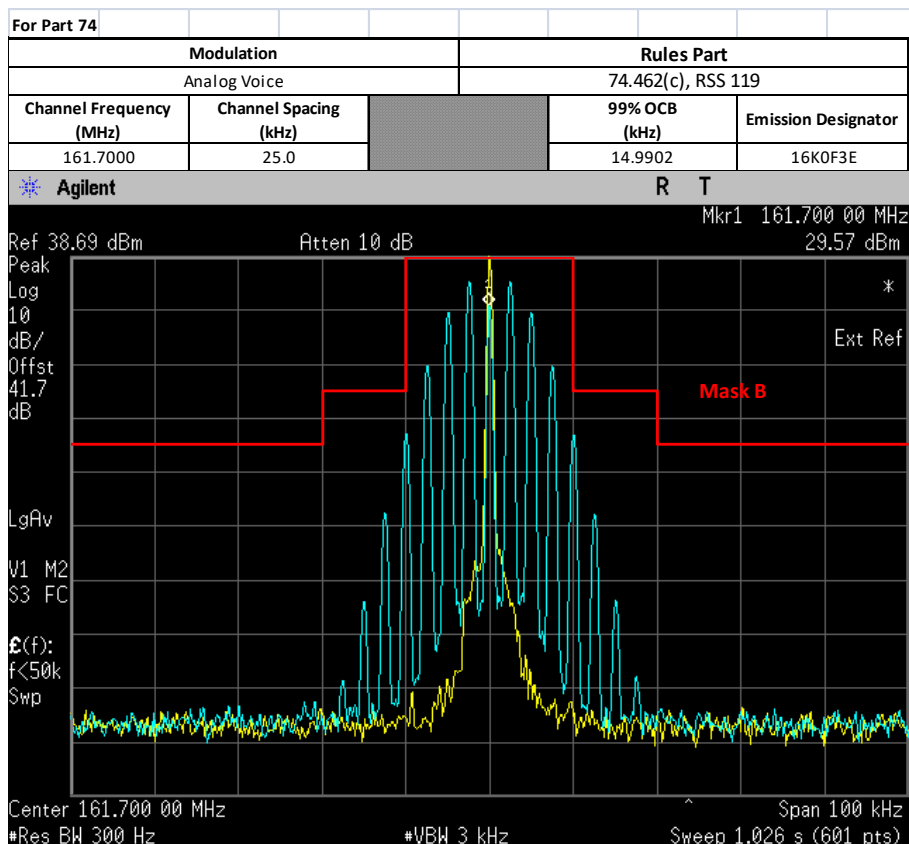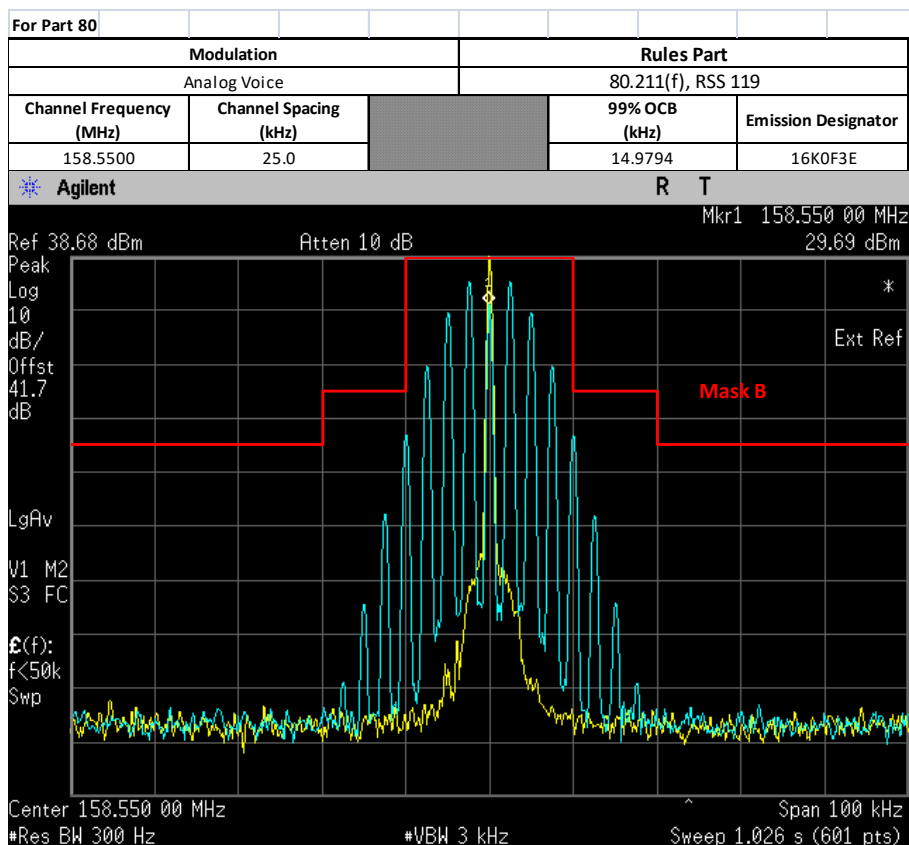


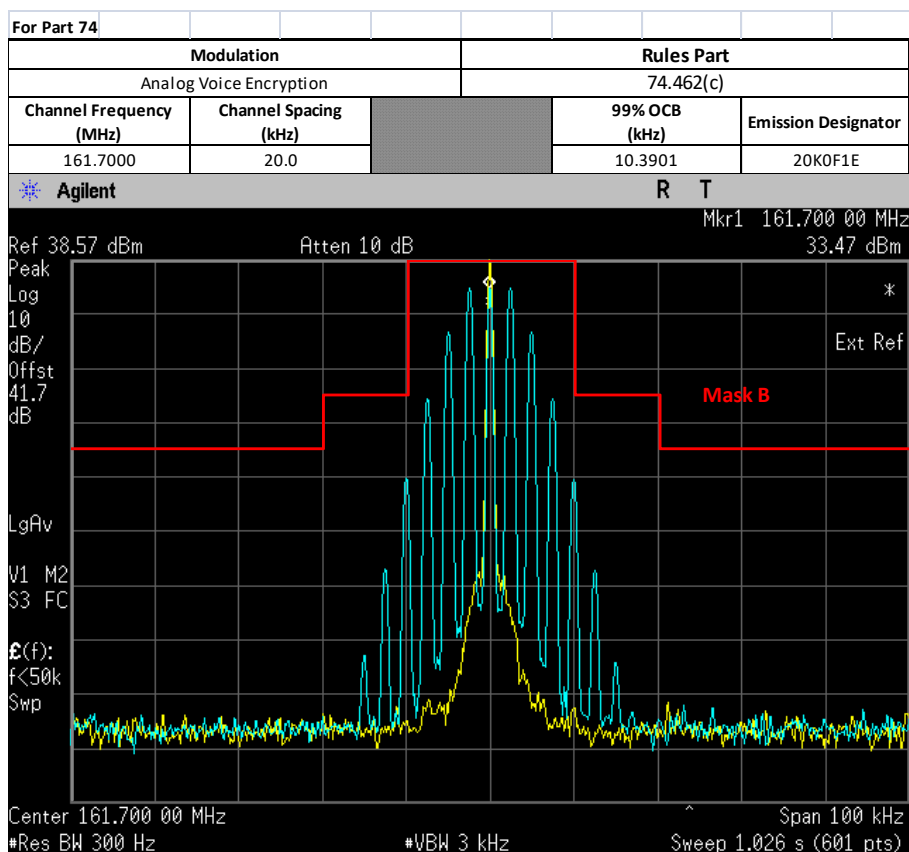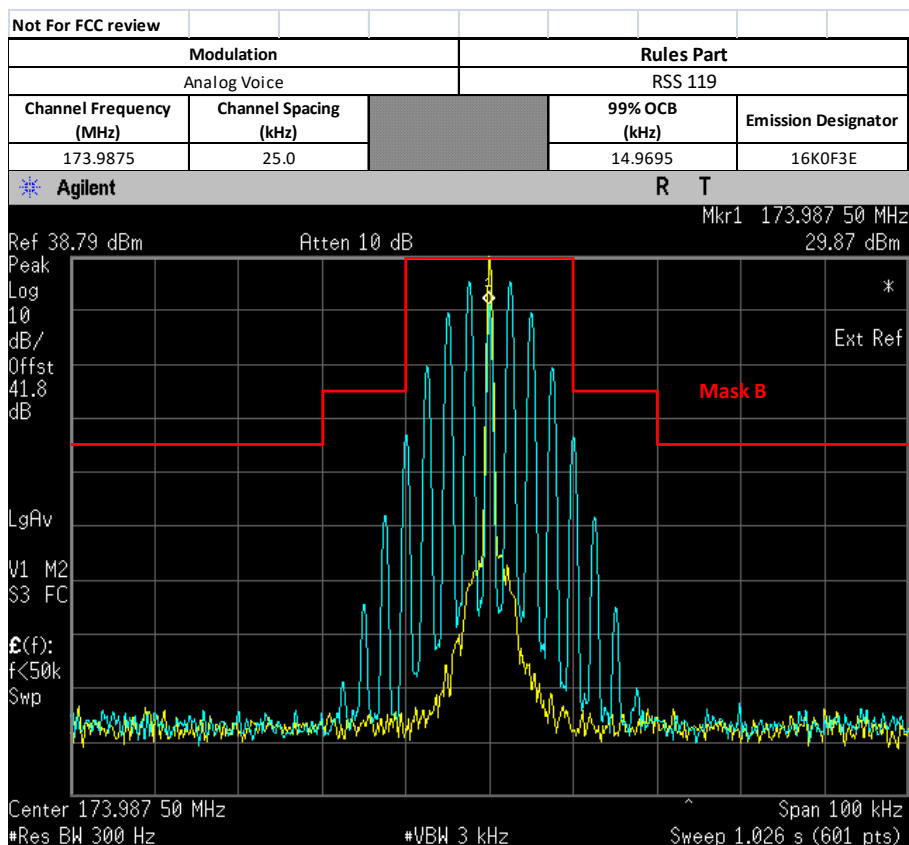

Part 80 (Maritime)

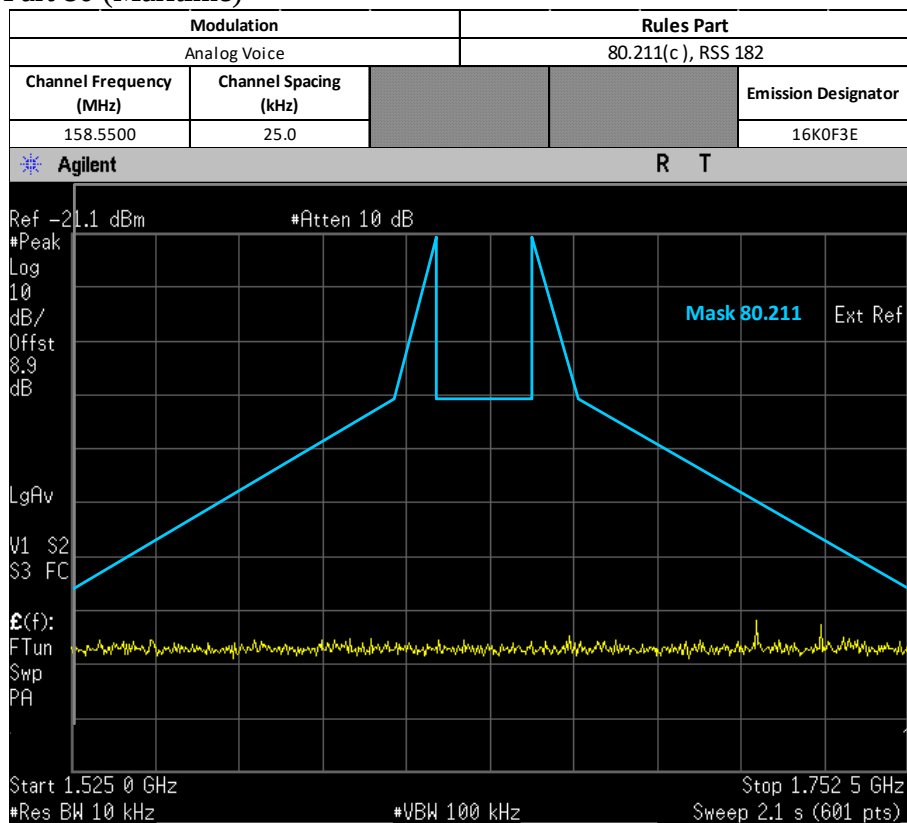

6.5.3. Test Setup (Digital)

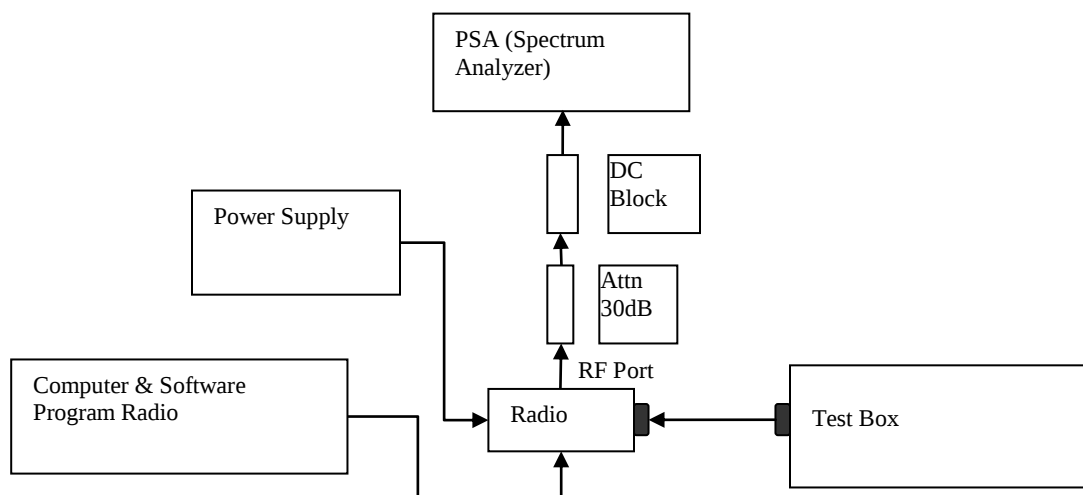

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.


6.5.4. Test Result (Digital)



Digital (12.5 kHz Channelization, Digital Voice/Data/Voice+Data):
 Emission Designator 7K60F1E/D/W



The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).



F1E/D/W portion of the designator indicates digital voice/data/voice+data.



Therefore, the entire designator for 12.5 kHz channelization digital voice is 7K60F1E/D/W.


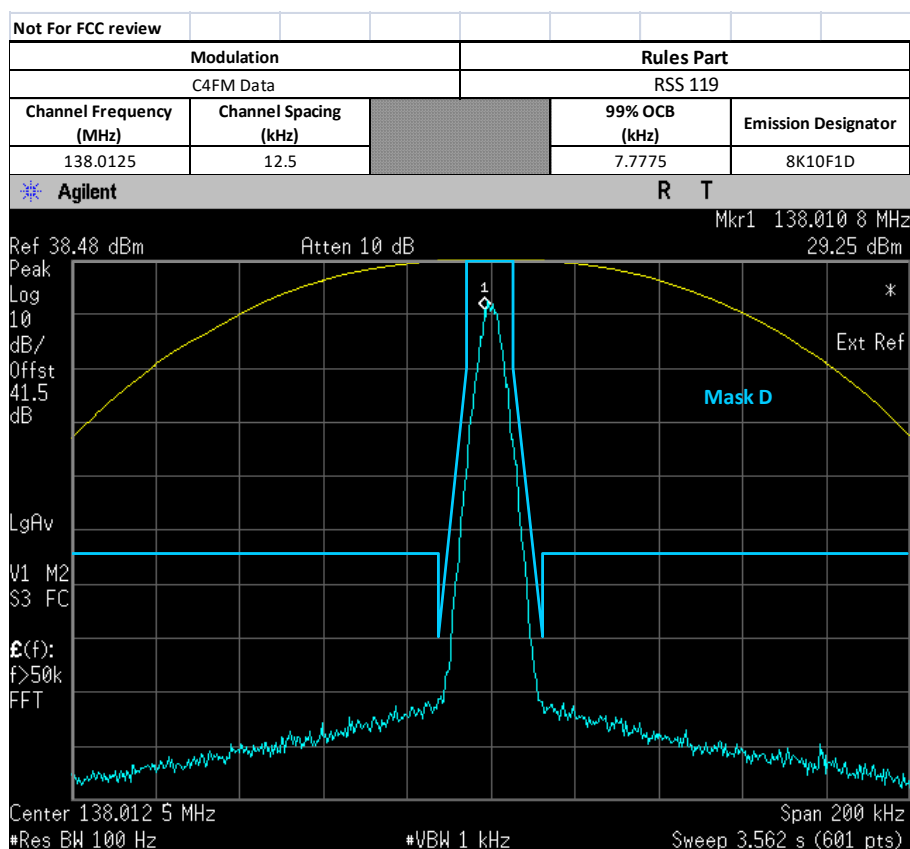


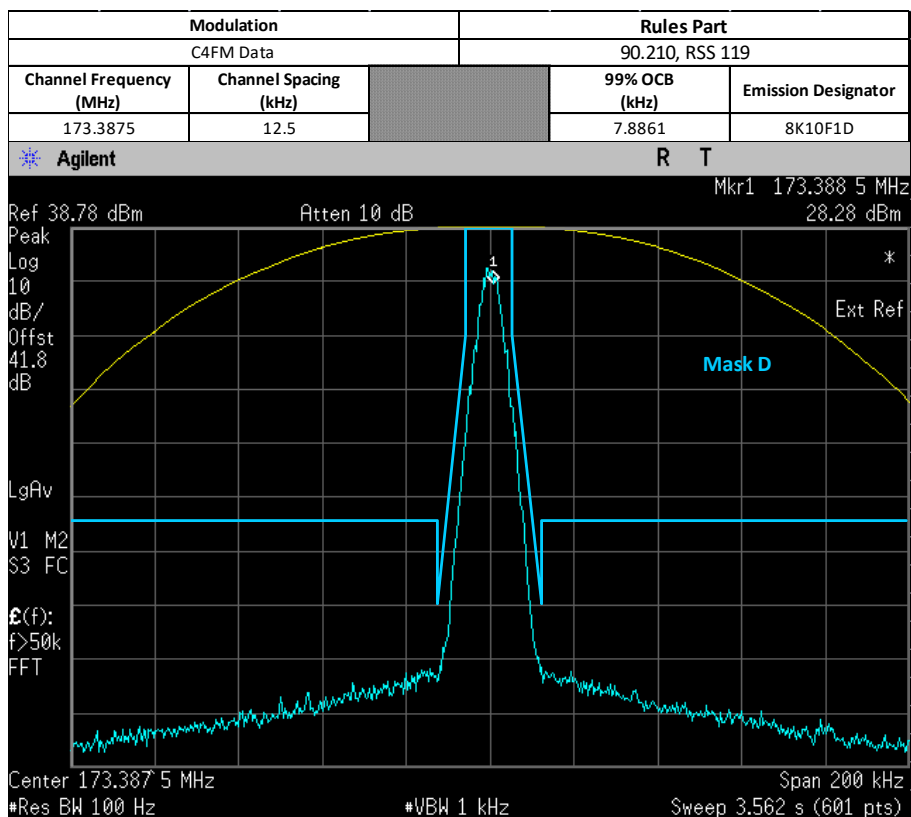
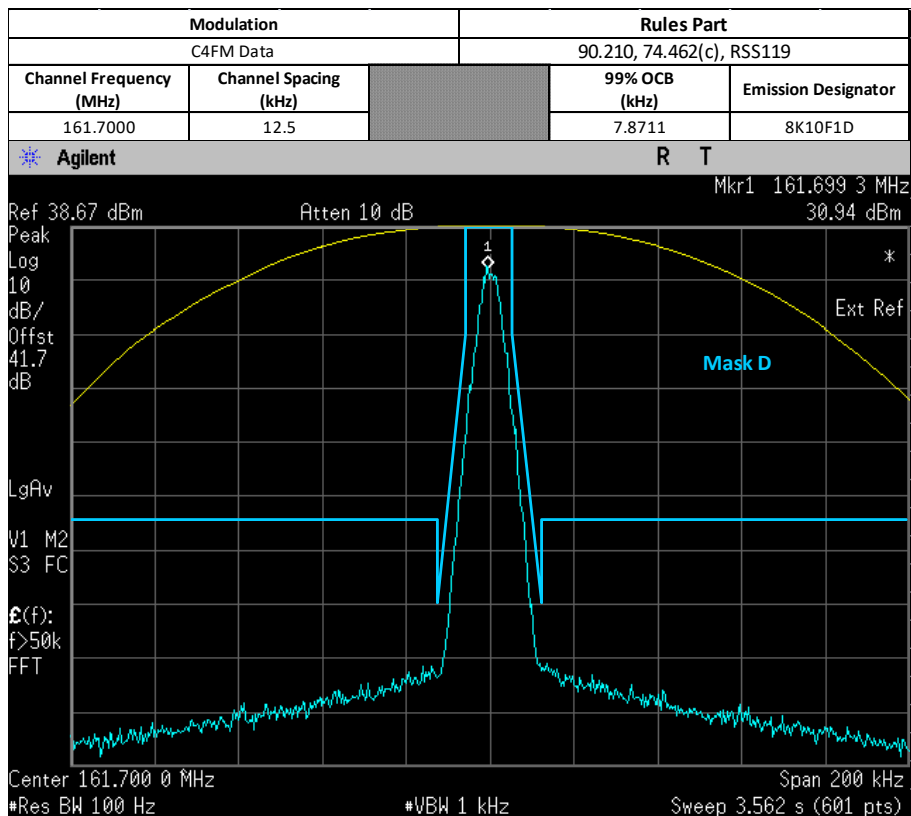


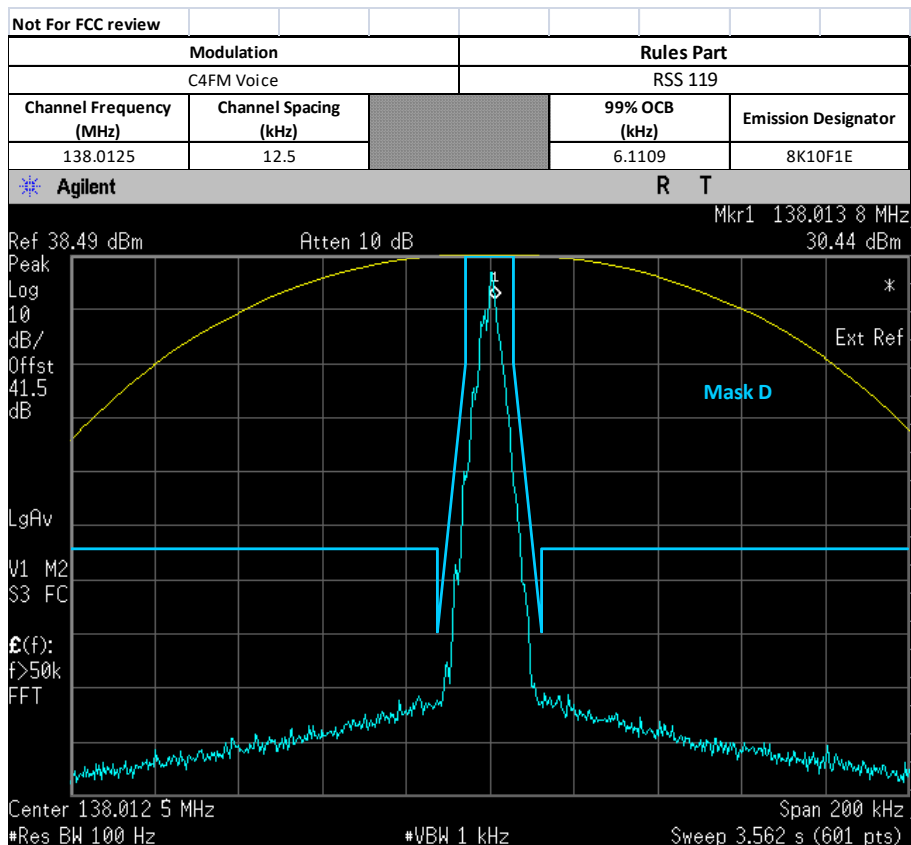
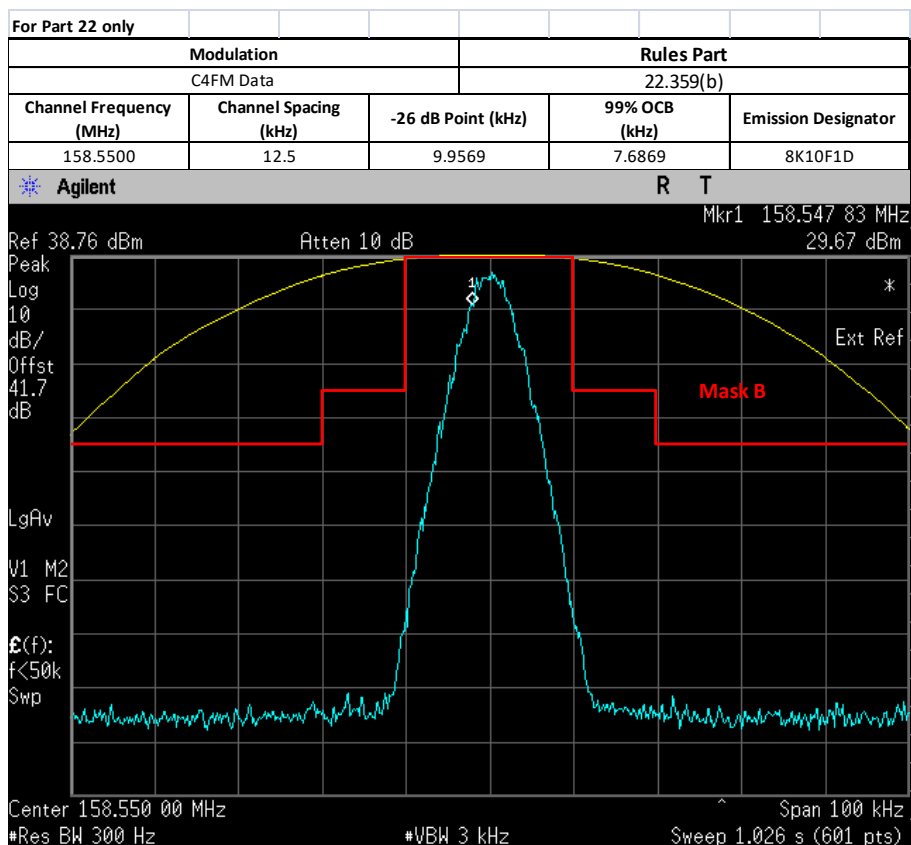


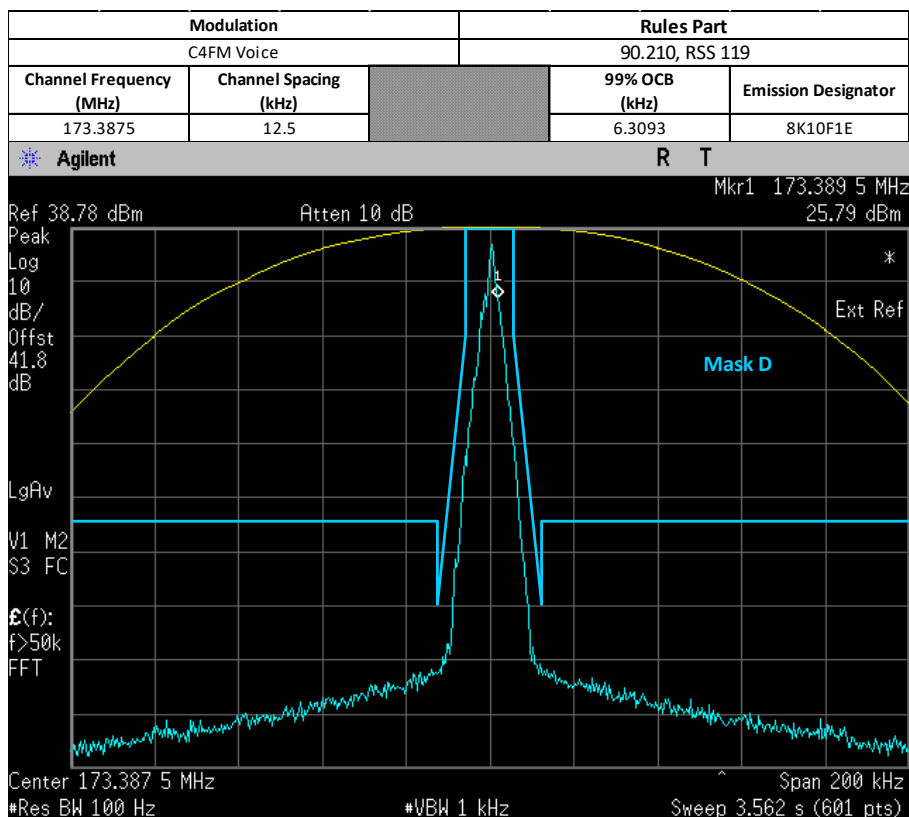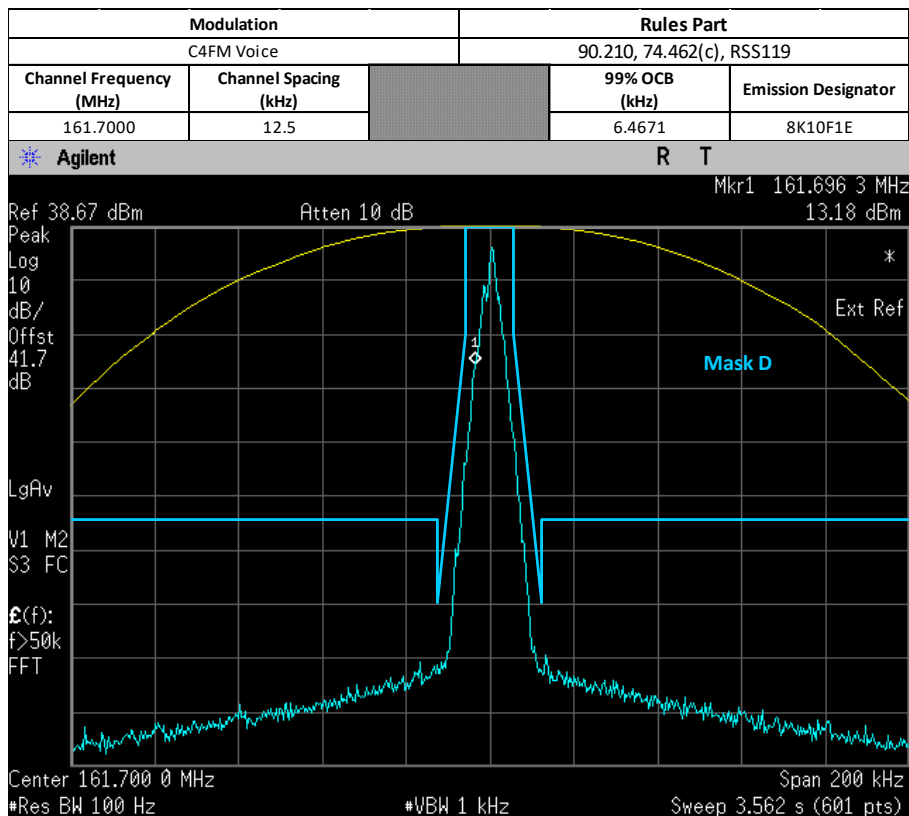


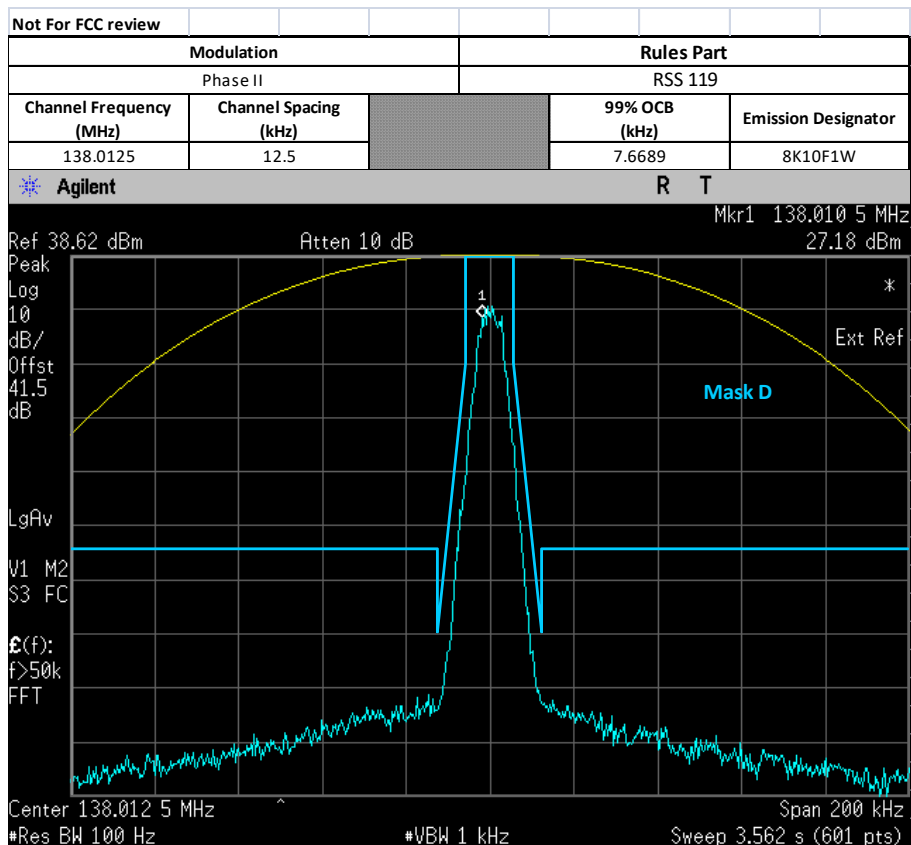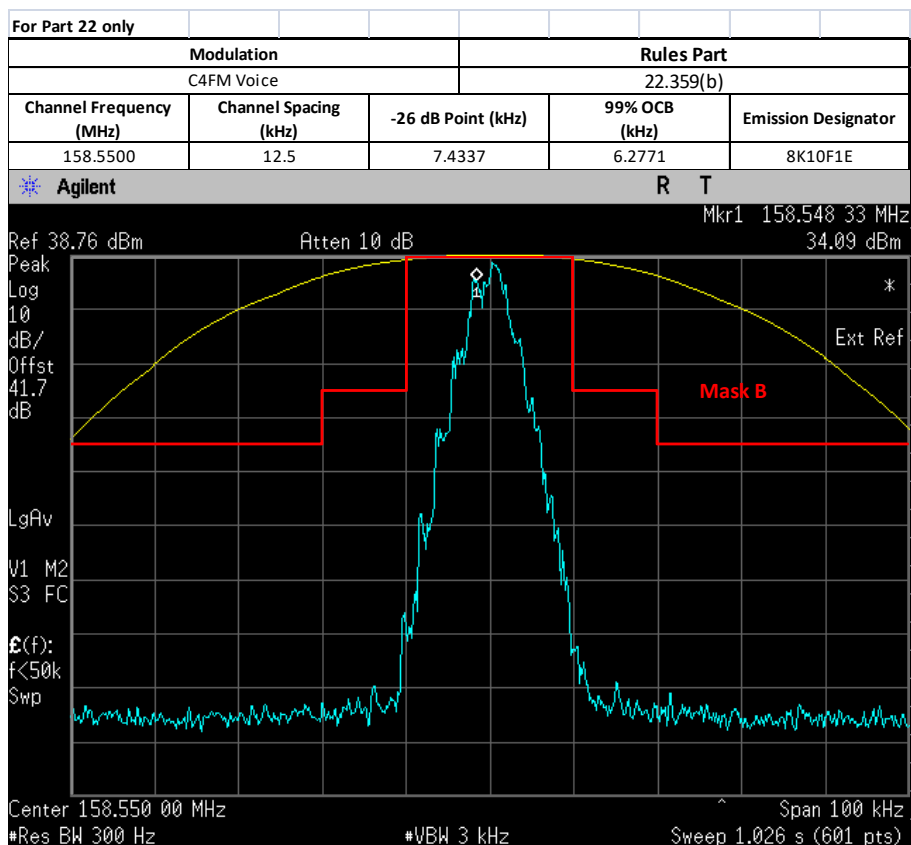

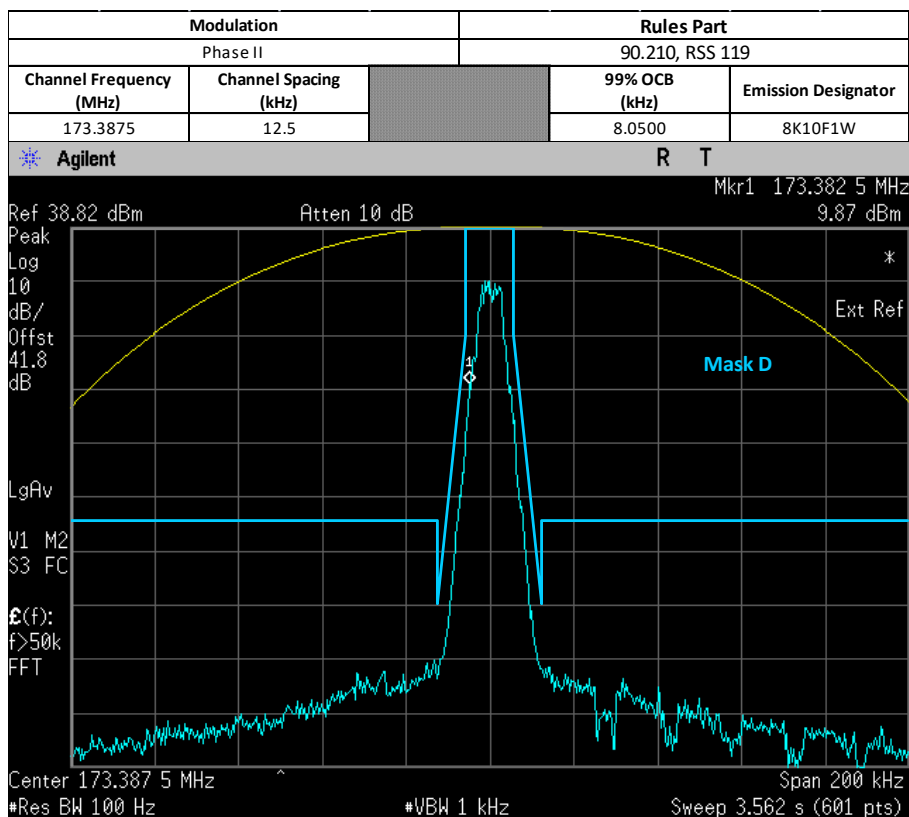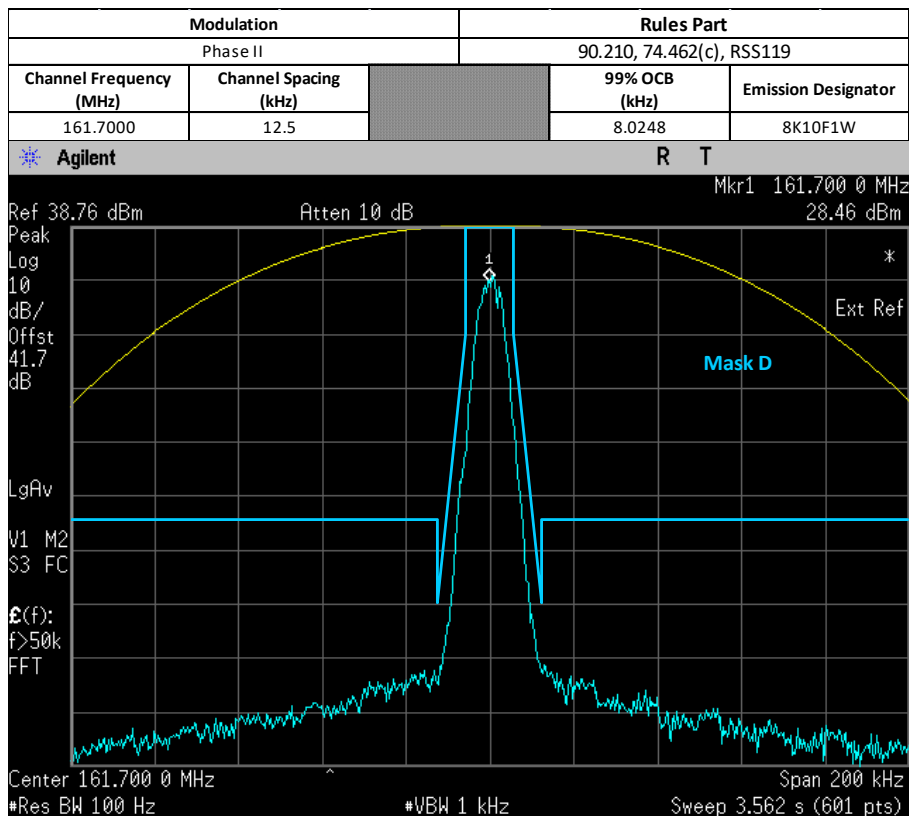

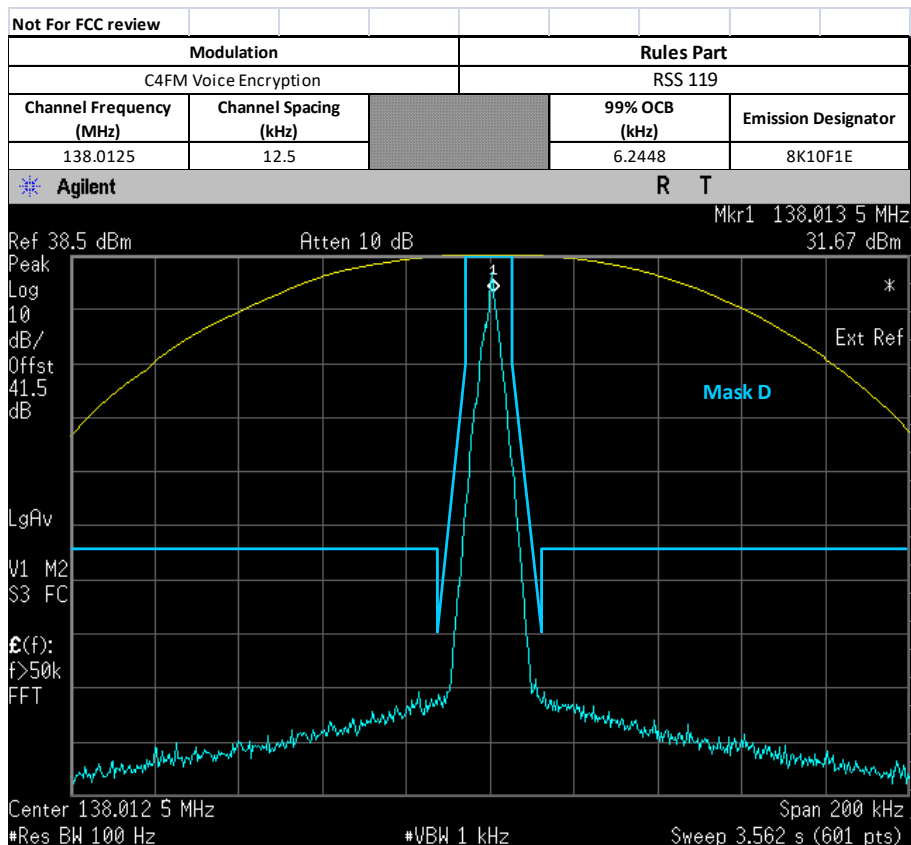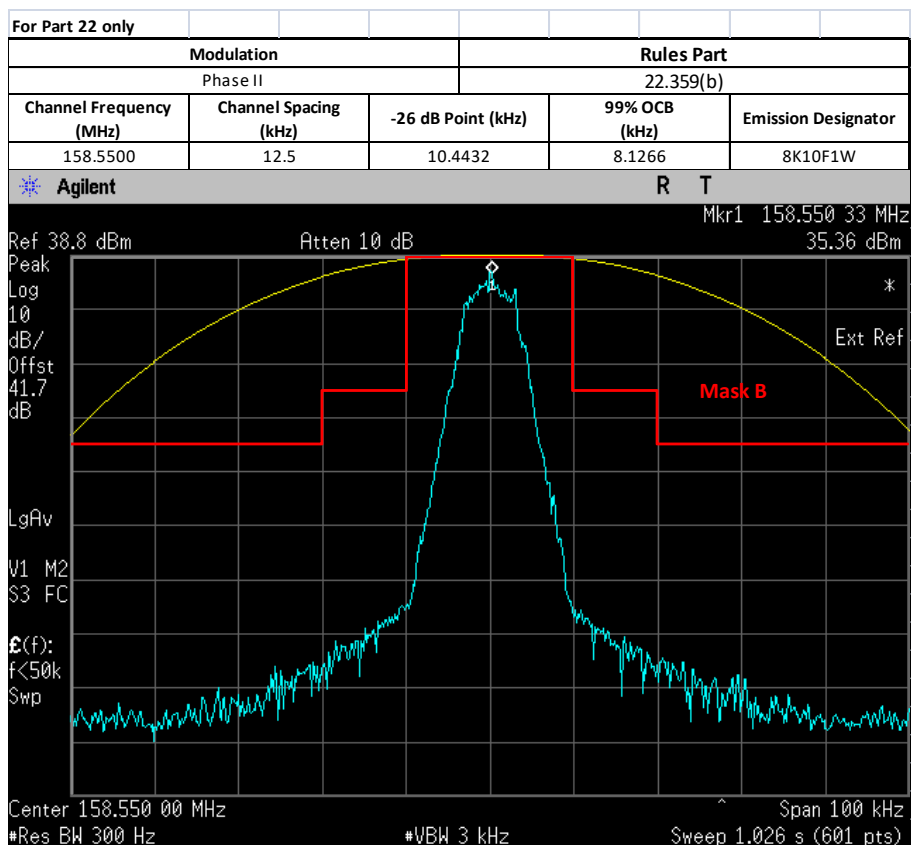

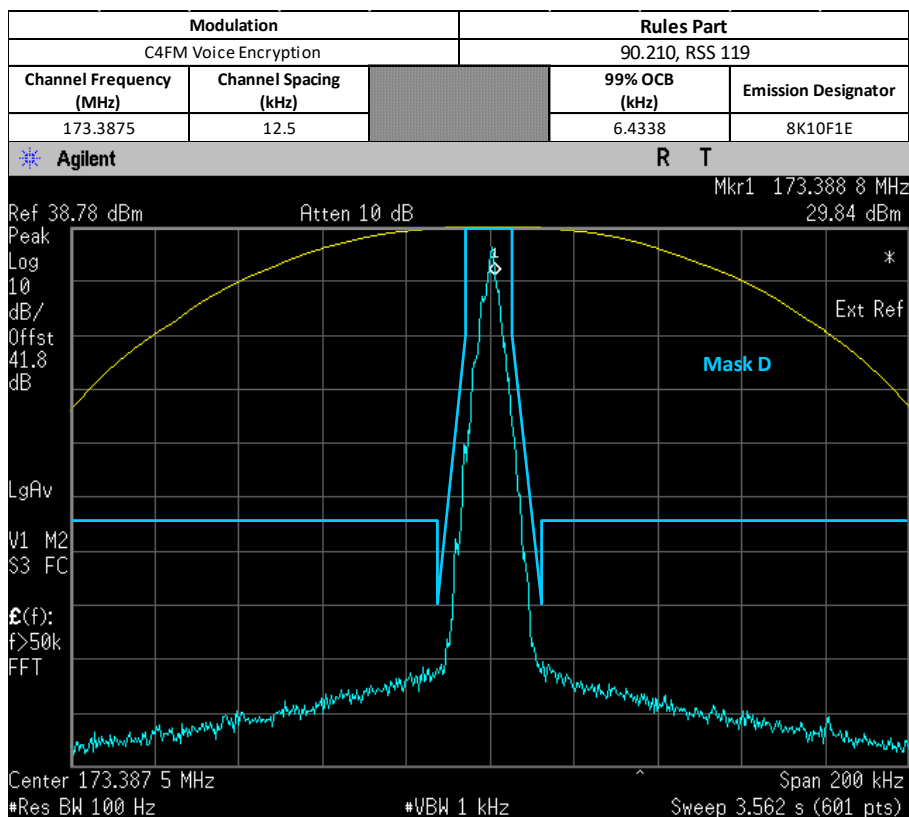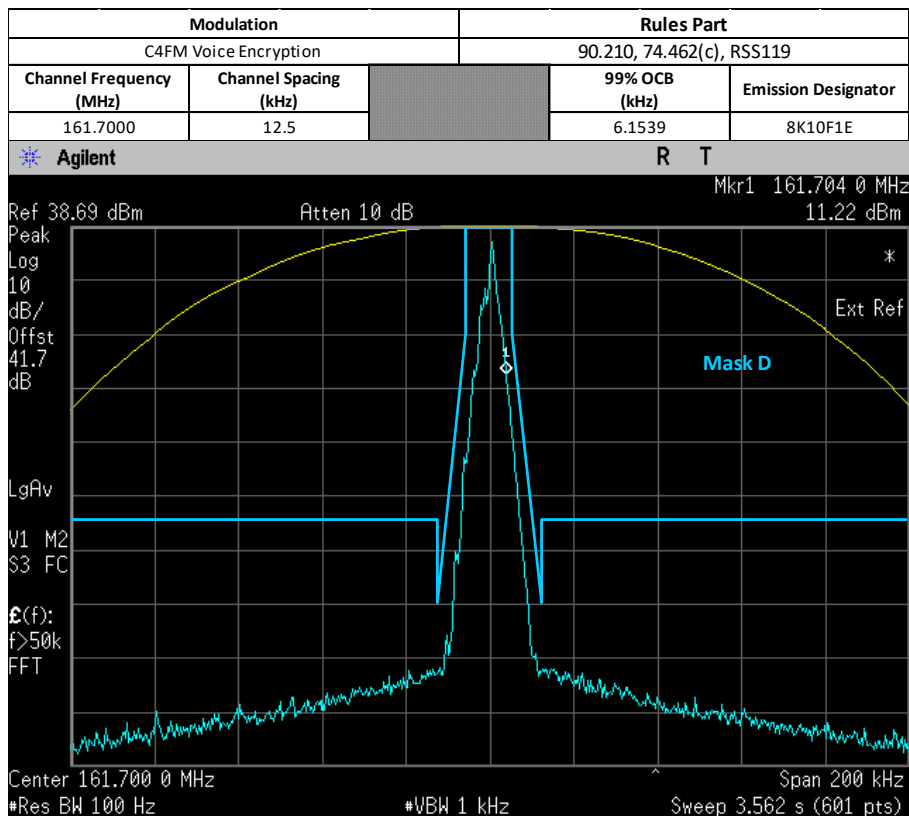

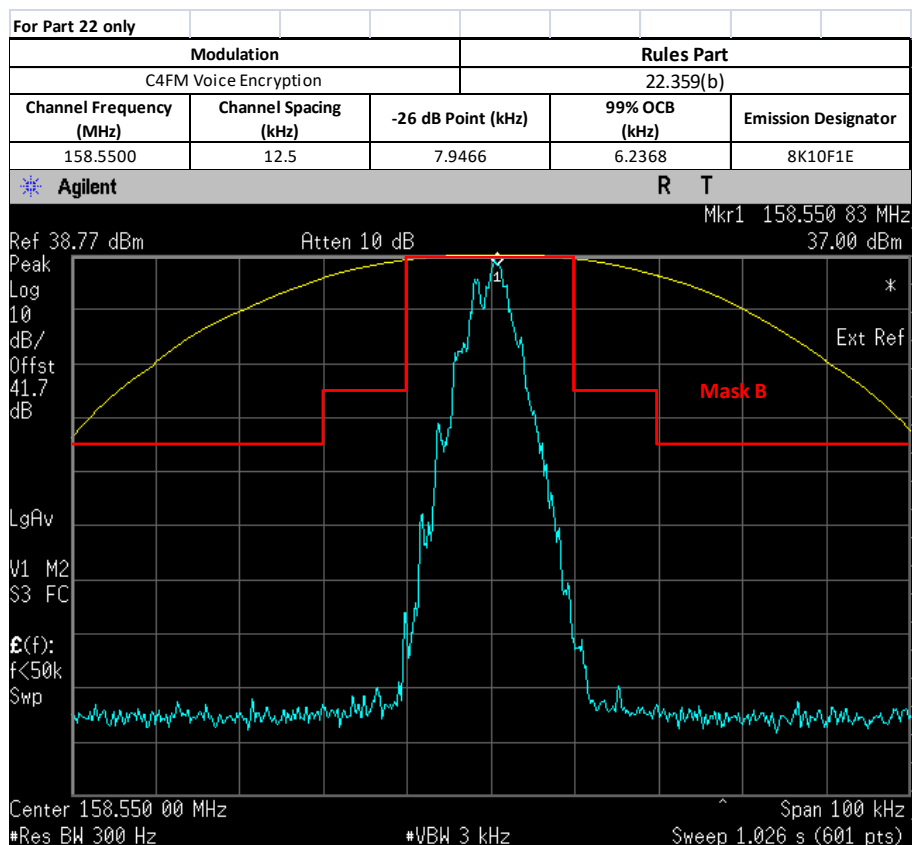


6.5.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.6. Band Edge Conducted Spurious Emission (Part 22)

6.6.1. Test Setup (Analog)

A. Get Fc for reference

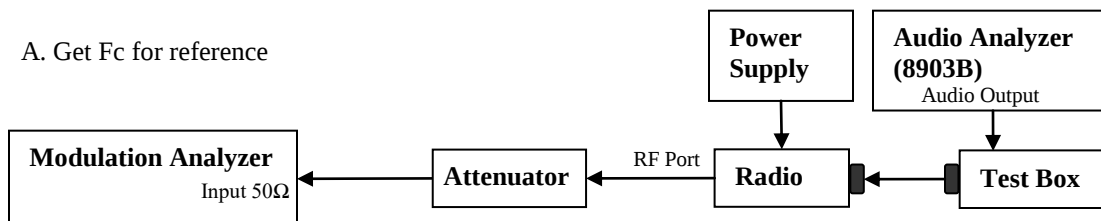

B. Testing

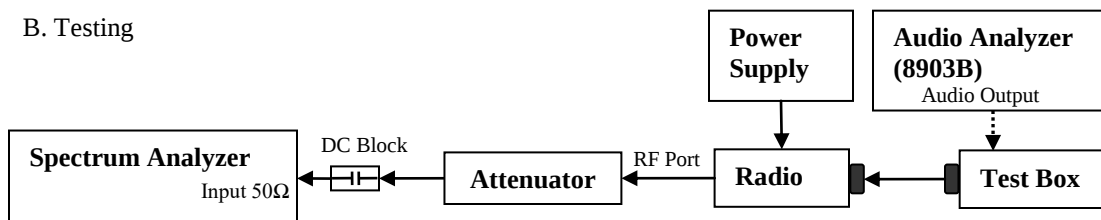


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.6.2. Test Result (Analog)


Low Power

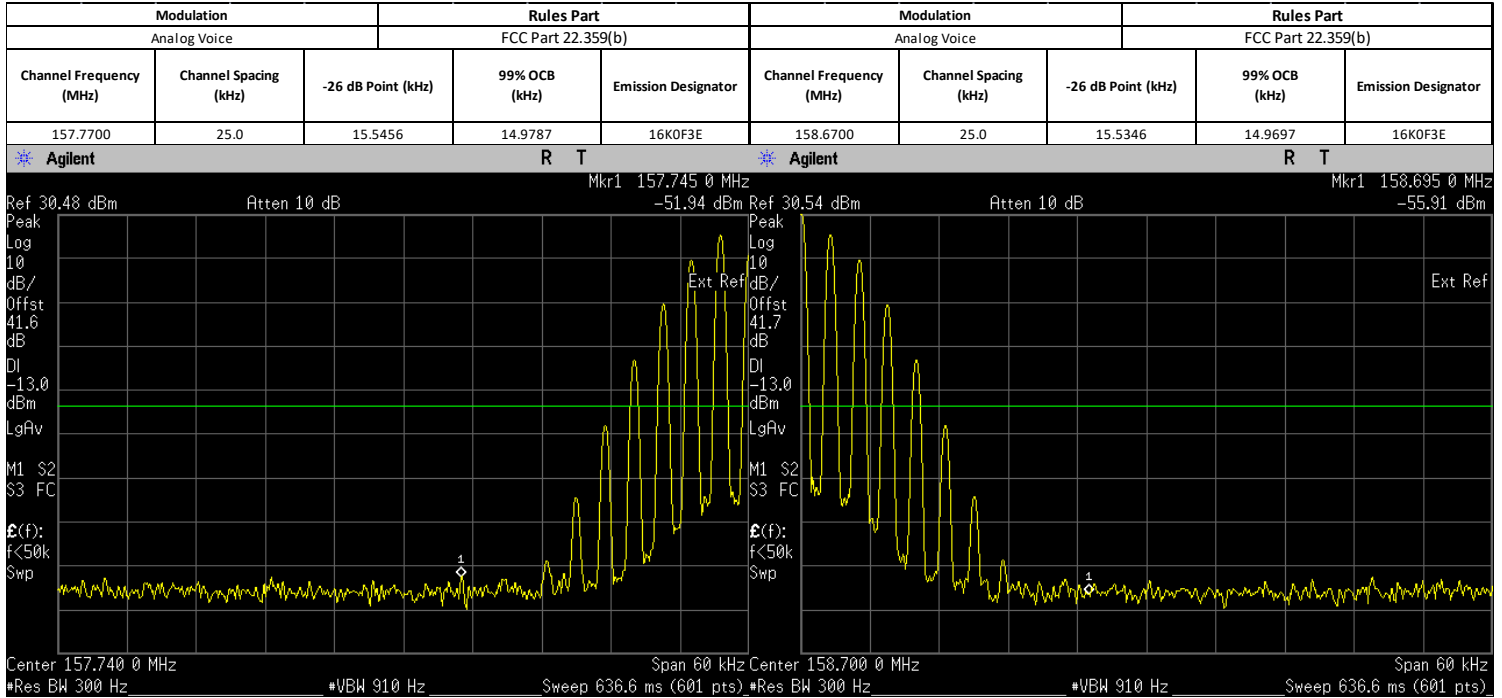

Max Power

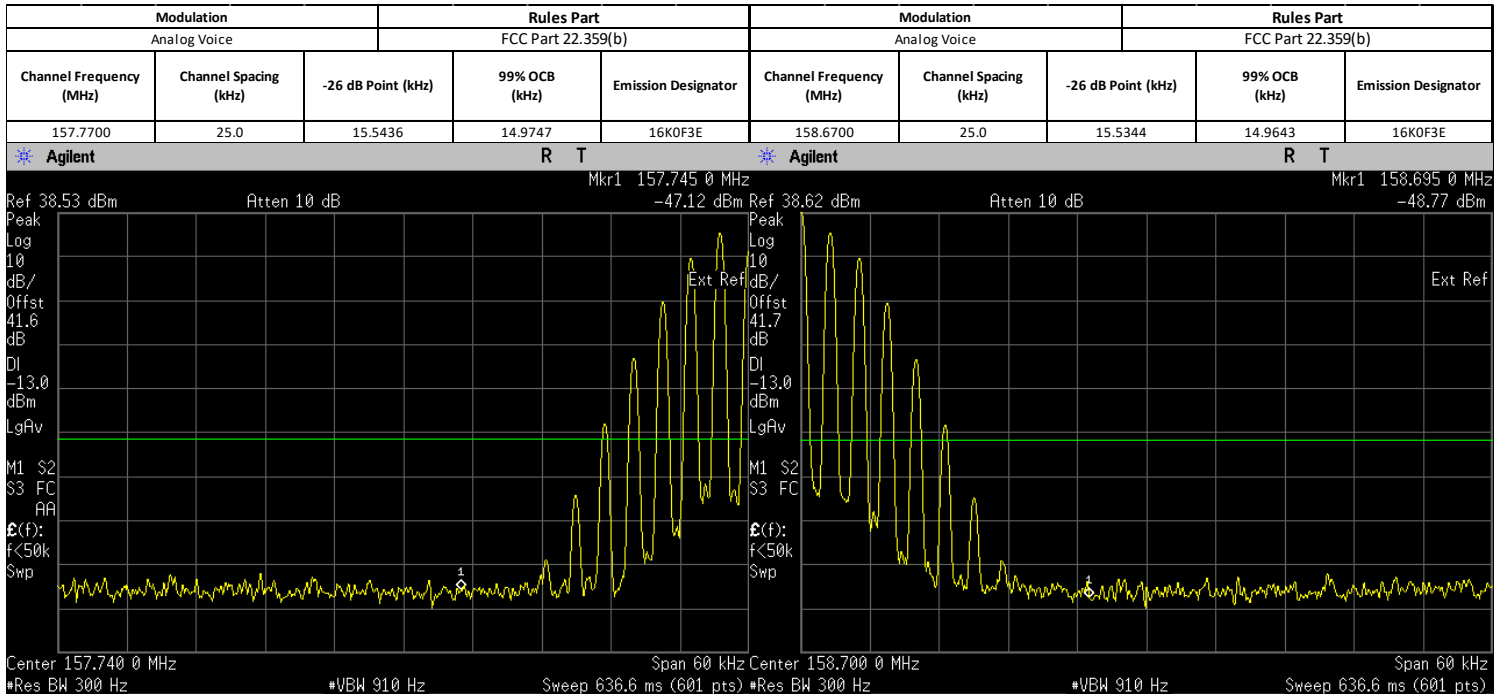

6.6.3. Test Setup (Digital)

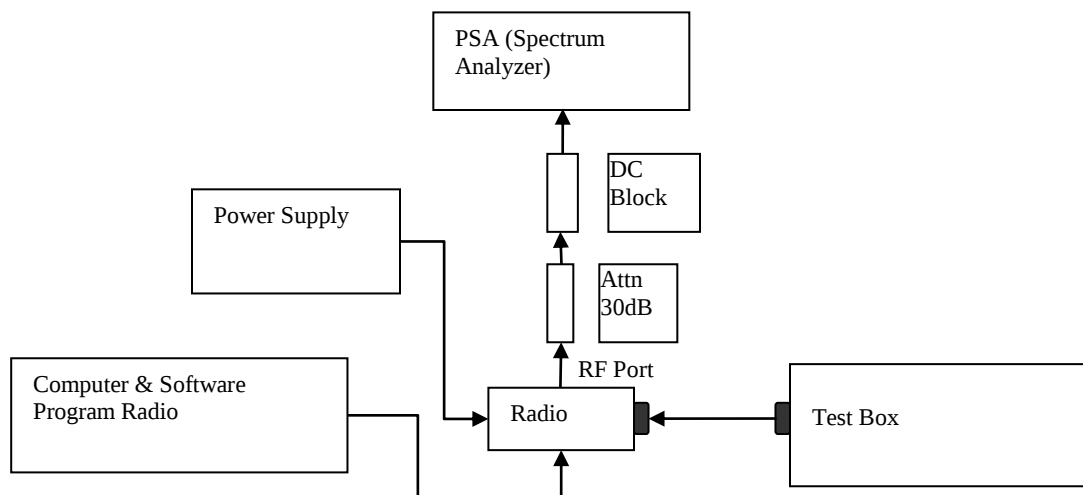


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:


- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)


Low Power

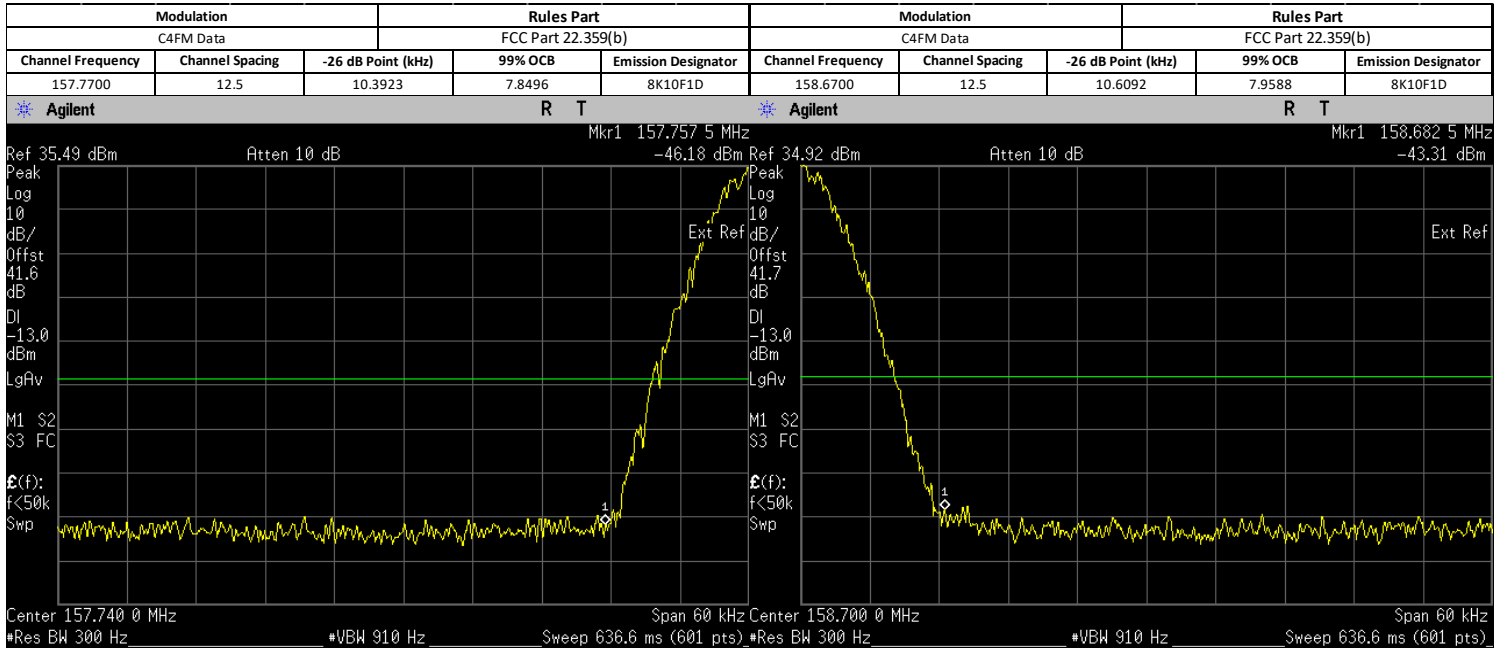


Max Power

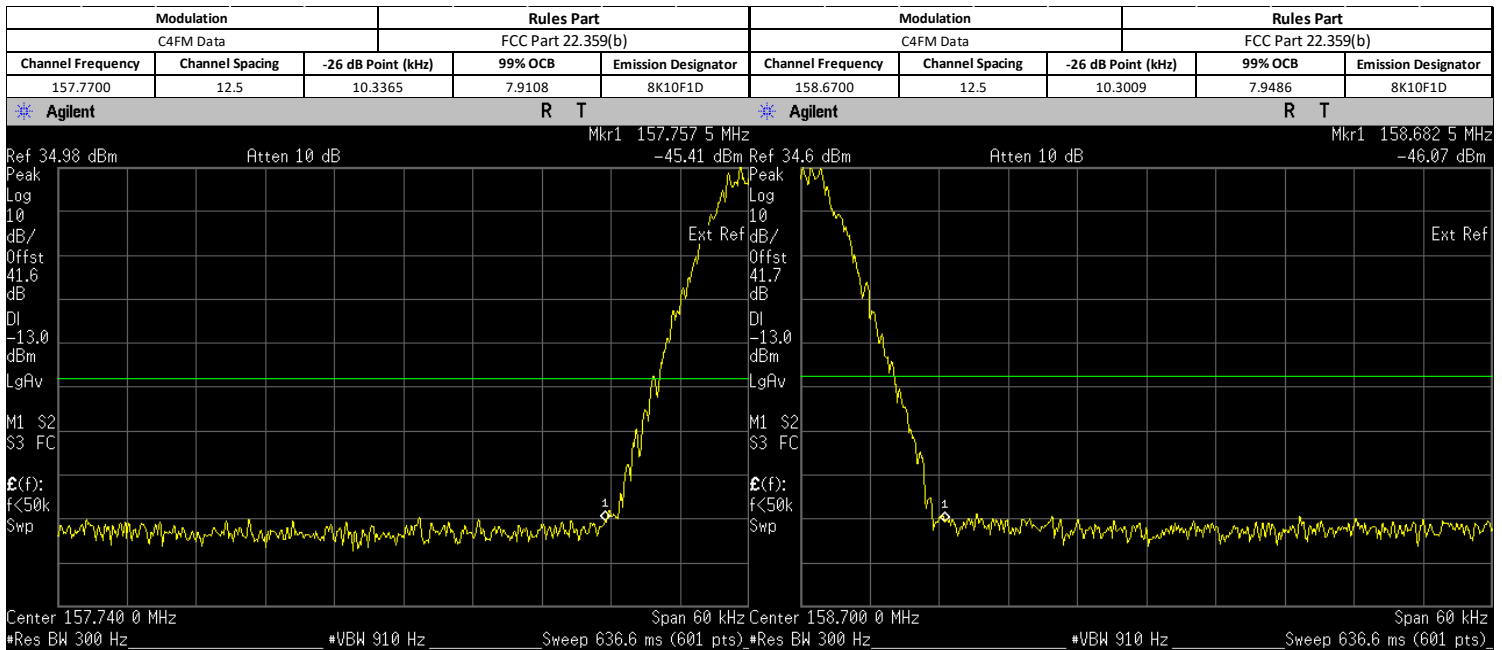

Low Power

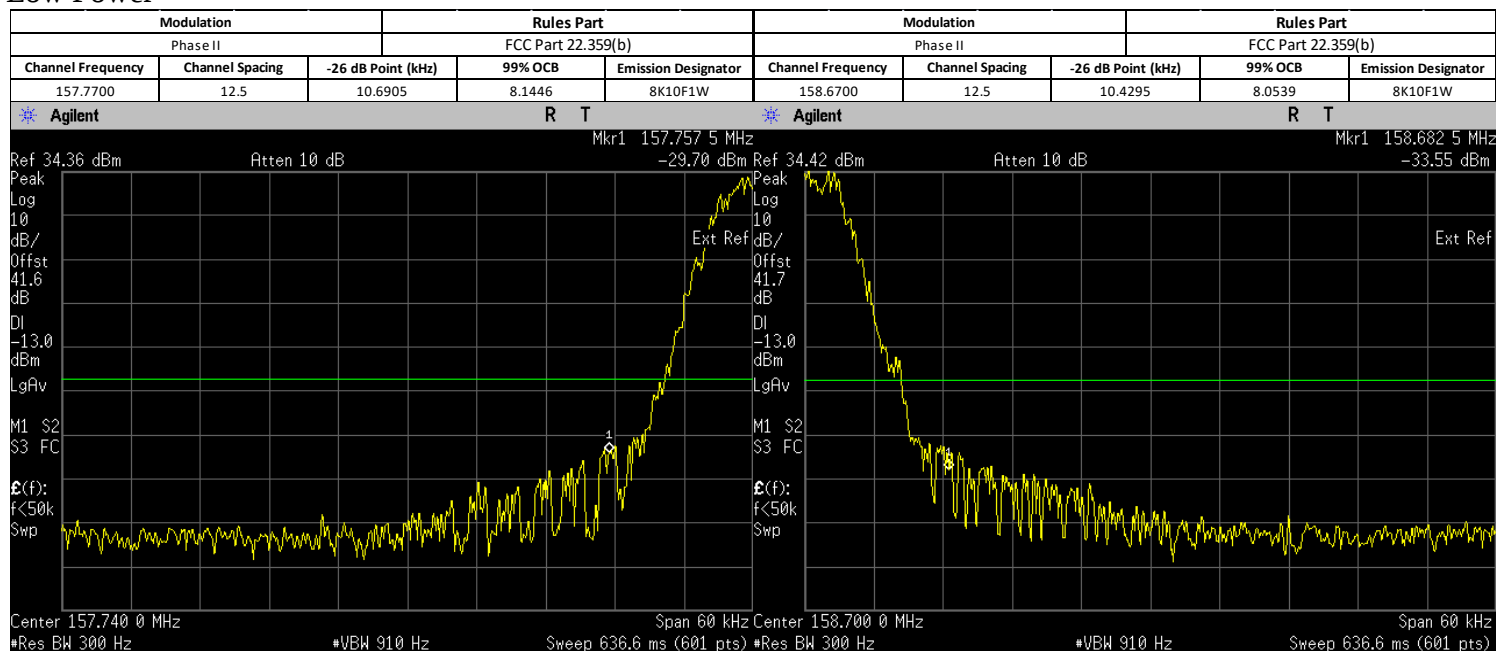

Max Power

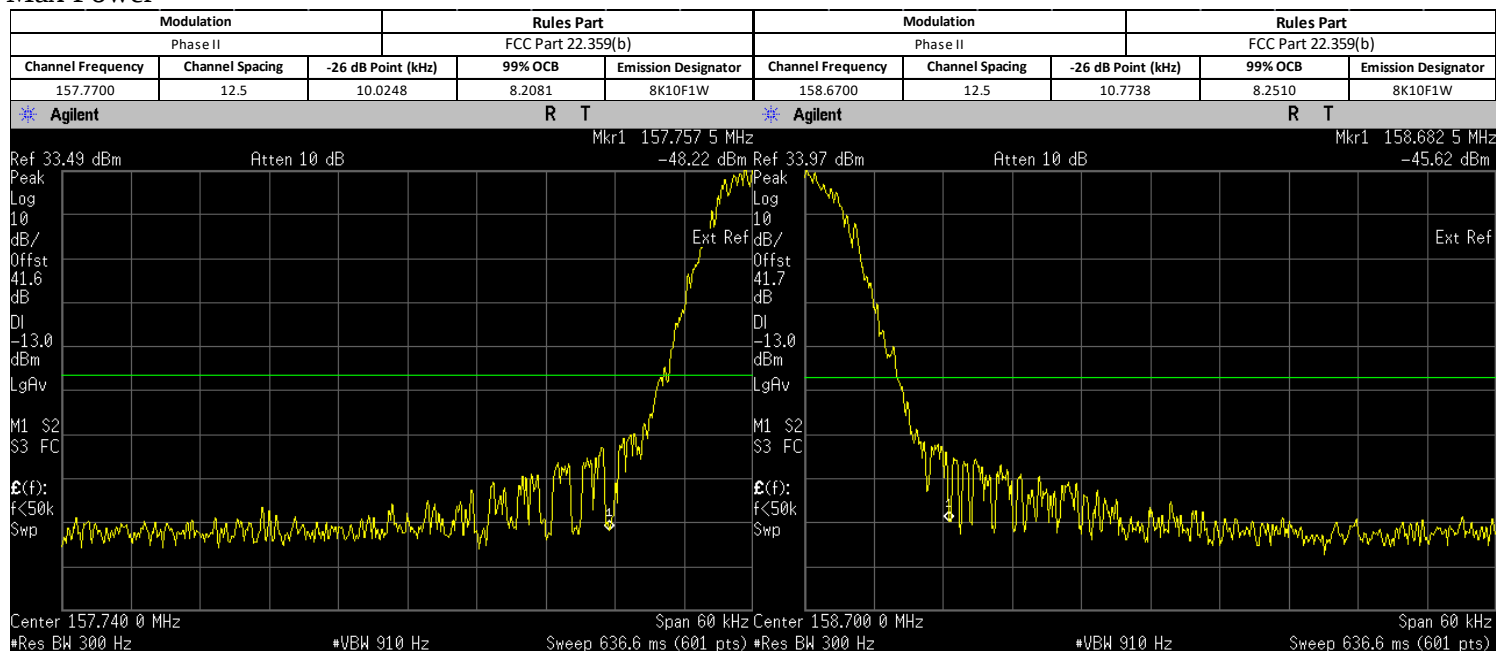


6.6.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.7. Transient Frequency Behavior


6.7.1. Test Setup

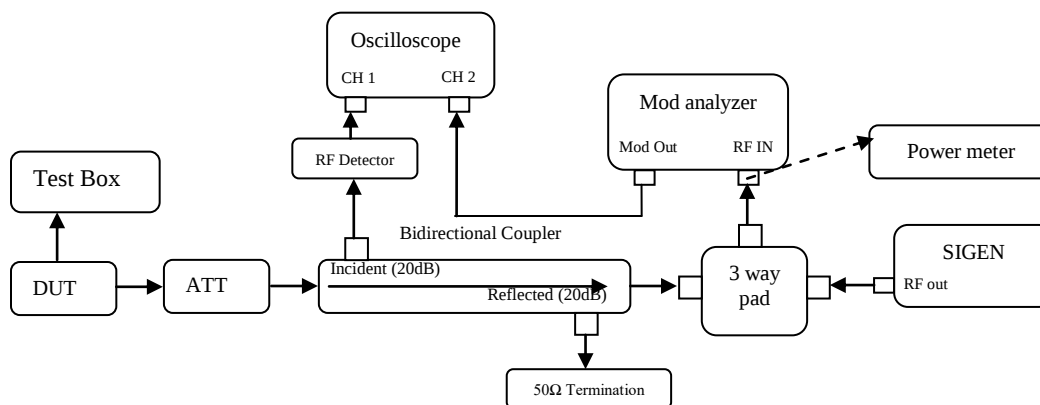



- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.7.2. Test Result

Max Power

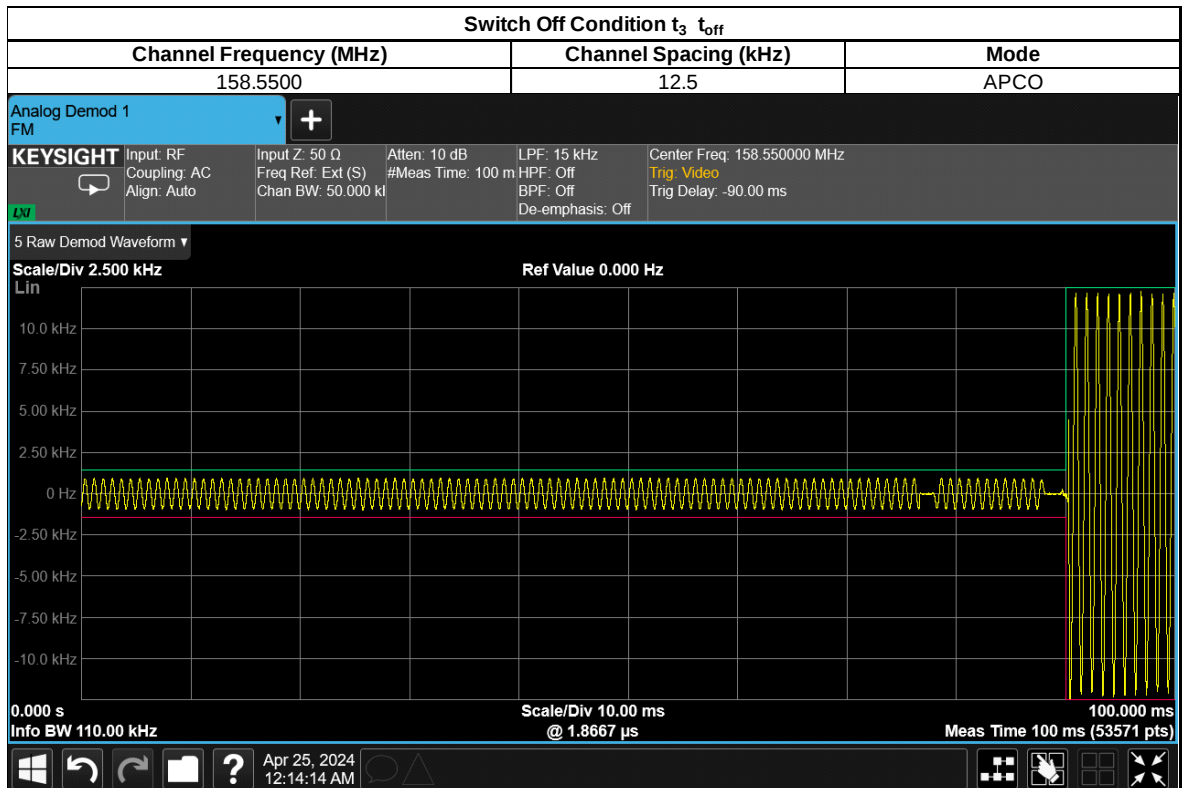

Max Power

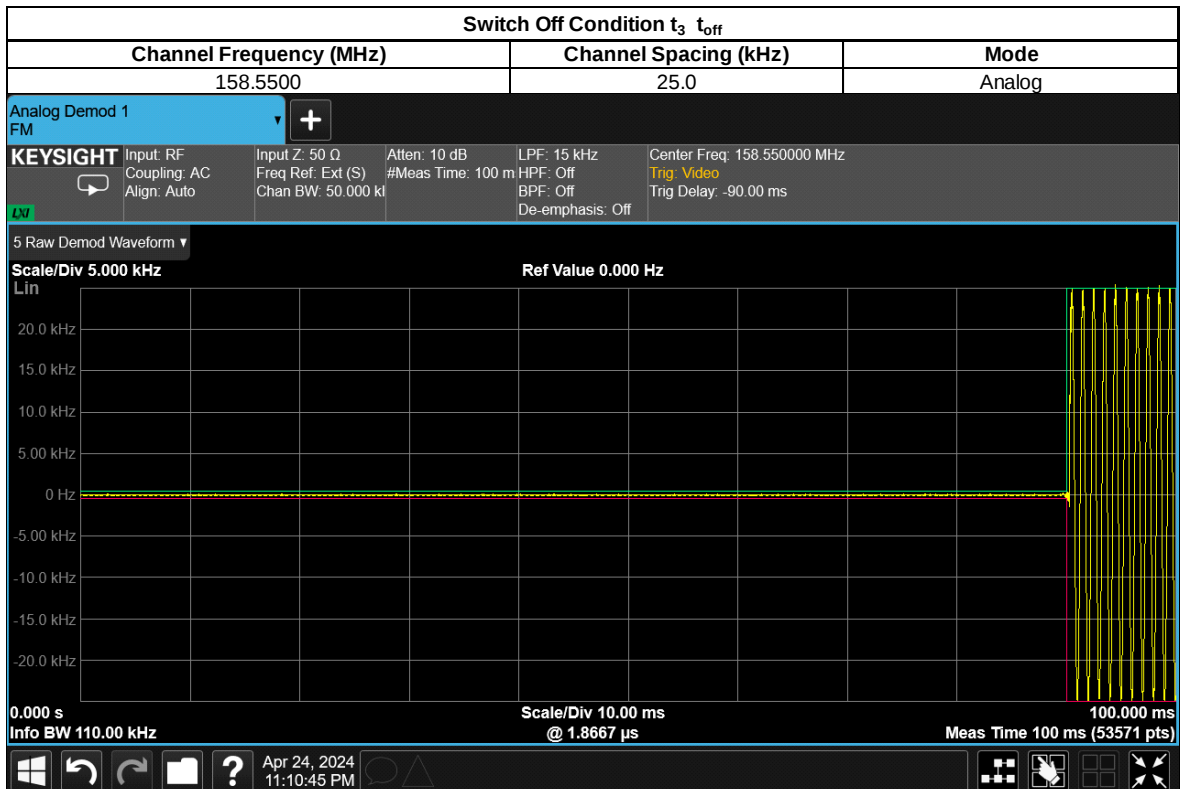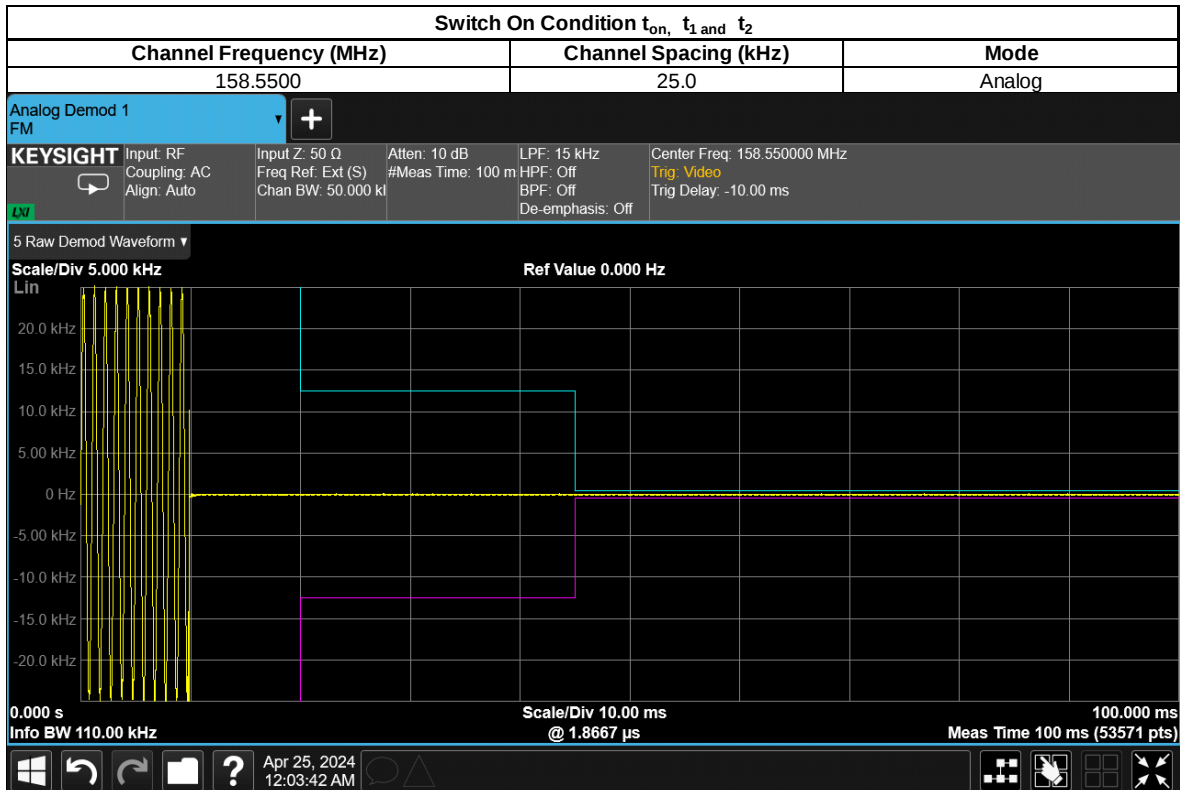

6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.8. Adjacent Channel Power


6.8.1. Test Setup (Analog)

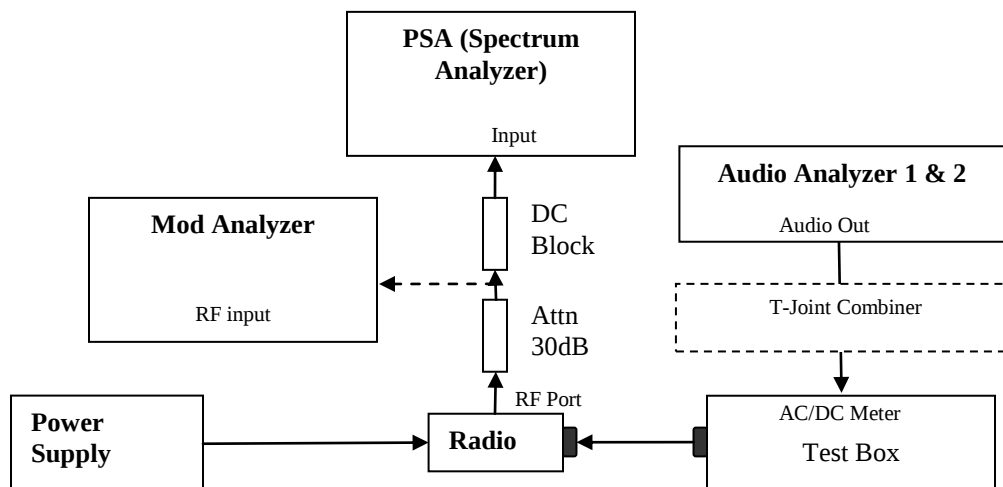

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.2. Test Result Not Applicable

6.8.3. Test Setup (Digital)

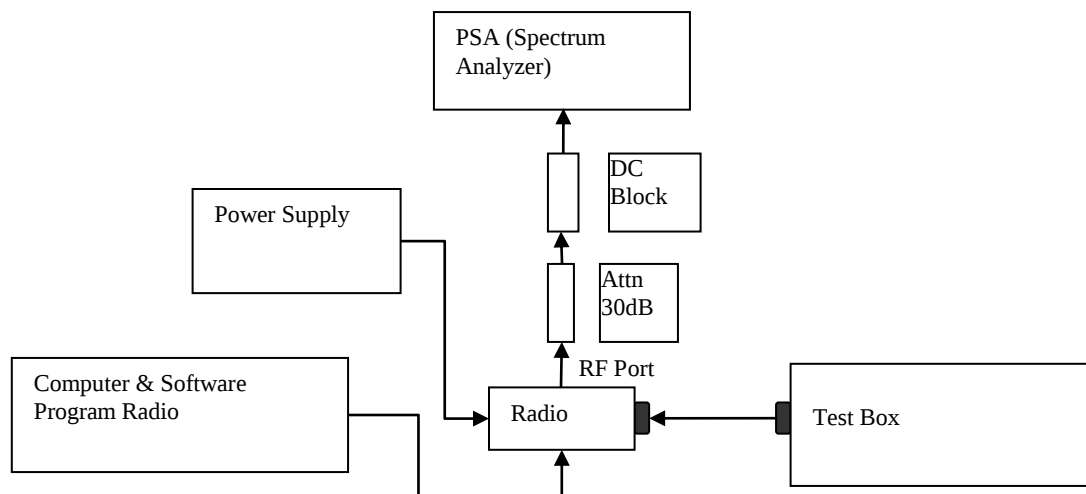

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.4. Test Result **Not Applicable**

6.8.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.9. Conducted Spurious Emission

6.9.1. Test Setup

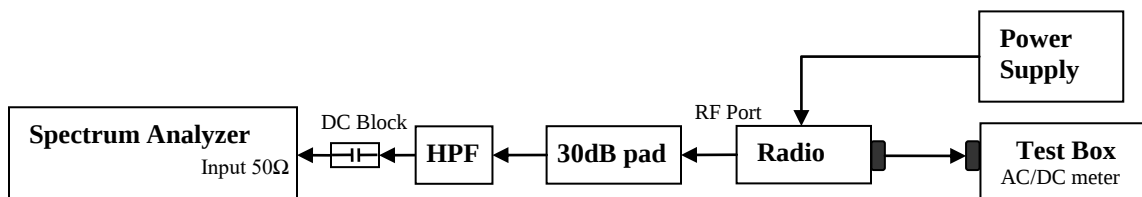


- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.

6.9.2. Test Result (Analog)


Not for FCC review

Analog: 138.0125 MHz, 25 kHz Channel Spacing, Max Power

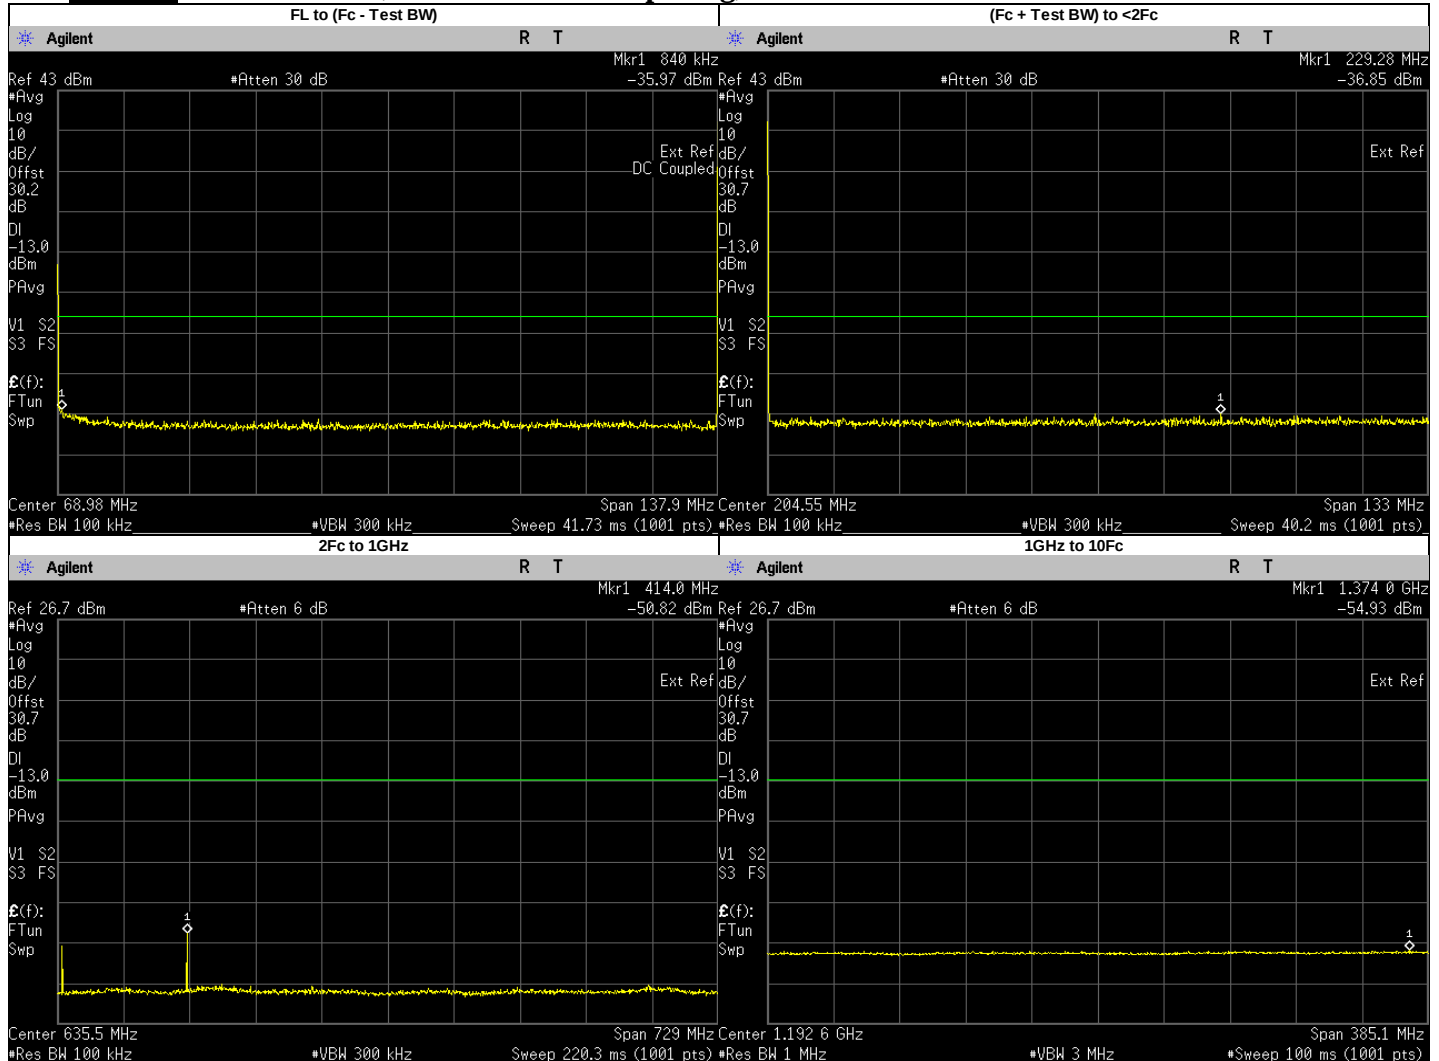


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8400	-35.9660	-13	PASS
(Fc + Test BW) to <2Fc	229.2765	-36.8500	-13	PASS
2Fc to 1GHz	414.0375	-50.8200	-13	PASS
1GHz to 10Fc	276.0250	-55.7472	-13	PASS
	552.0500	-64.1686	-13	PASS
	690.0625	-65.2291	-13	PASS
	828.0750	-65.0758	-13	PASS
	966.0875	-65.3641	-13	PASS
	1373.9560	-54.9300	-13	PASS
	1104.1000	-55.7706	-13	PASS
	1242.1120	-55.7912	-13	PASS
	1380.1250	-55.5506	-13	PASS

Analog: 158.5500 MHz, 25 kHz Channel Spacing, Max Power

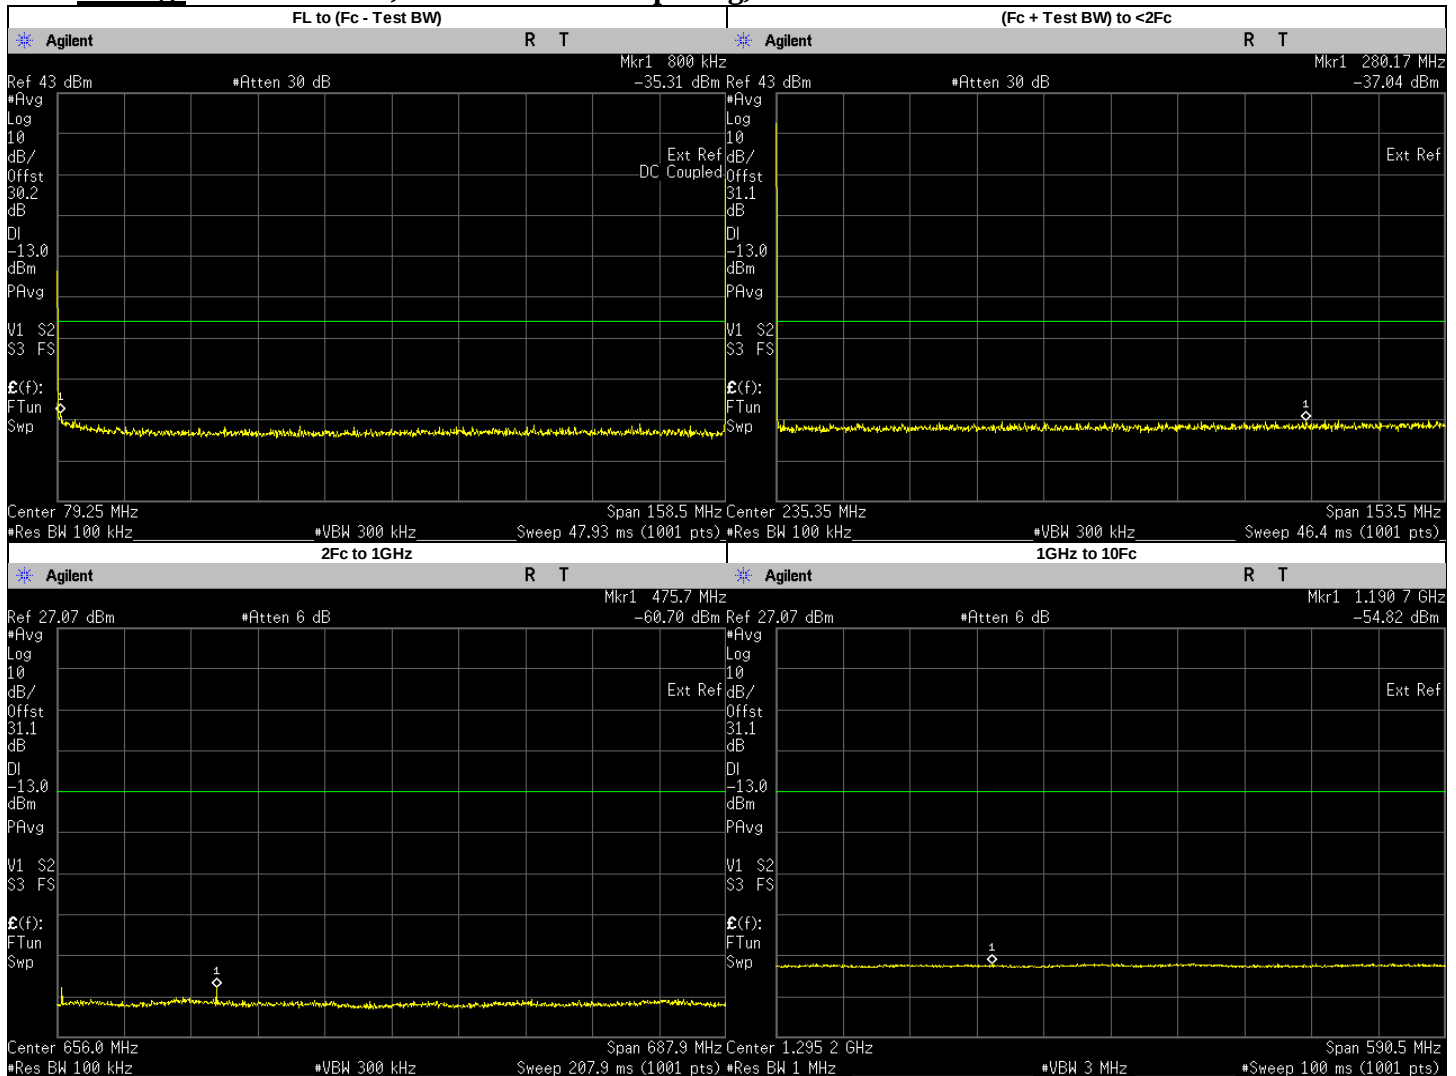


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8000	-35.3110	-13	PASS
(Fc + Test BW) to <2Fc	280.1732	-37.0400	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	475.6500	-60.7000	-13	PASS
	317.1000	-61.7893	-13	PASS
	634.2000	-64.3482	-13	PASS
	792.7500	-64.4803	-13	PASS
	951.3000	-64.6063	-13	PASS
	1190.7320	-54.8200	-13	PASS
	1109.8500	-55.2331	-13	PASS
	1268.4000	-55.3954	-13	PASS
	1426.9500	-55.5645	-13	PASS
	1585.5000	-55.3176	-13	PASS

Analog: 158.5500 MHz, 25 kHz Channel Spacing, Low Power

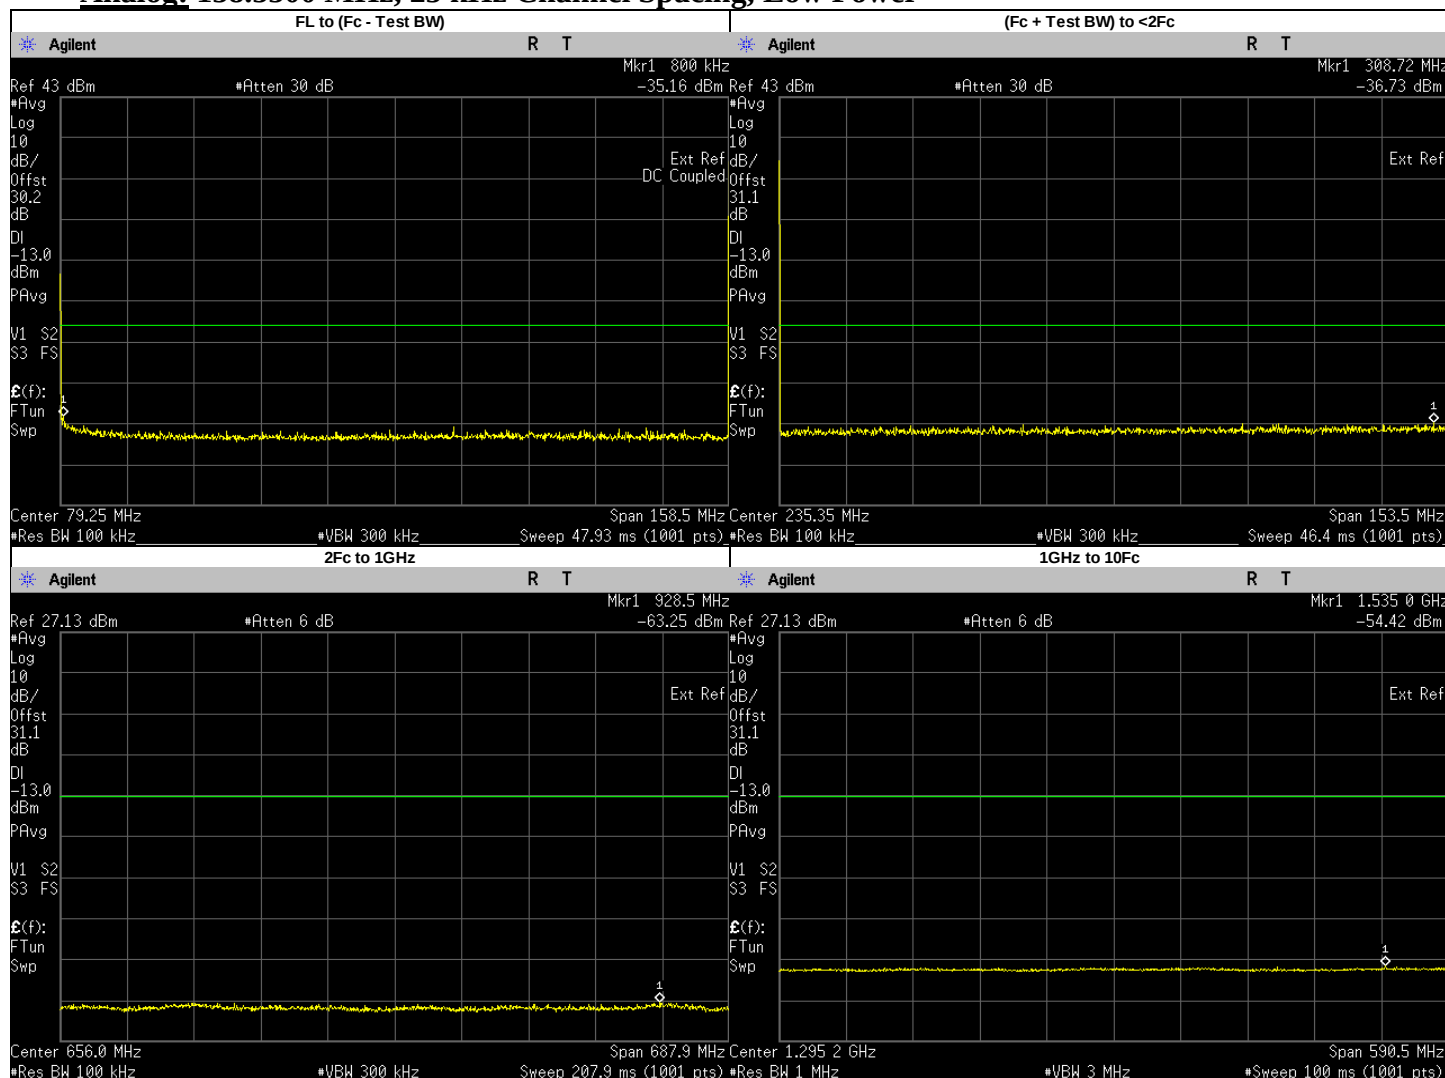


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8000	-35.1620	-13	PASS
(Fc + Test BW) to <2Fc	308.7231	-36.7300	-13	PASS
2Fc to 1GHz	928.4584	-63.2500	-13	PASS
1GHz to 10Fc	317.1000	-64.3499	-13	PASS
	475.6500	-63.9519	-13	PASS
	634.2000	-65.1530	-13	PASS
	792.7500	-64.8010	-13	PASS
	951.3000	-64.5043	-13	PASS
	1534.9930	-54.4200	-13	PASS
	1109.8500	-55.0839	-13	PASS
	1268.4000	-55.1351	-13	PASS
	1426.9500	-55.4064	-13	PASS
	1585.5000	-55.0770	-13	PASS

Analog: 161.7000 MHz, 25 kHz Channel Spacing, Max Power

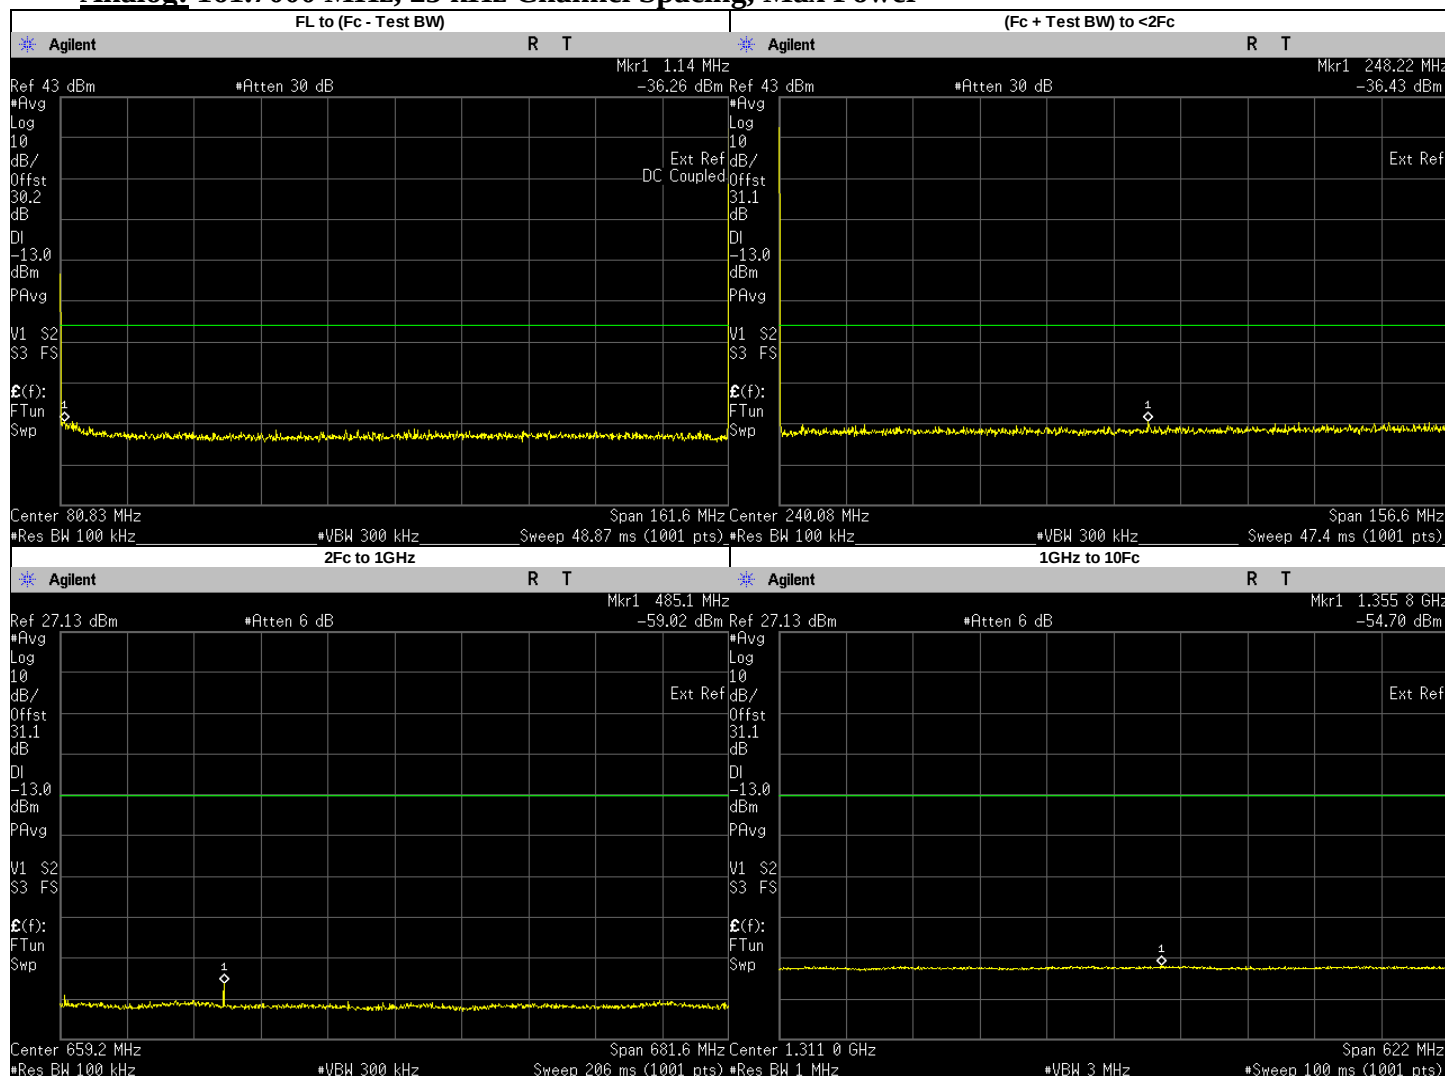

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1400	-36.2600	-13	PASS
(Fc + Test BW) to <2Fc	248.2233	-36.4300	-13	PASS
2Fc to 1GHz	485.1000	-59.0200	-13	PASS
1GHz to 10Fc	323.4000	-62.7131	-13	PASS
	646.8000	-64.0156	-13	PASS
	808.5000	-65.0888	-13	PASS
	970.2000	-65.0033	-13	PASS
	1355.7840	-54.7000	-13	PASS
	1131.9000	-55.1662	-13	PASS
	1293.6000	-55.2609	-13	PASS
	1455.3000	-54.8979	-13	PASS
	1617.0000	-55.3667	-13	PASS


Analog: 161.7000 MHz, 25 kHz Channel Spacing, Low Power

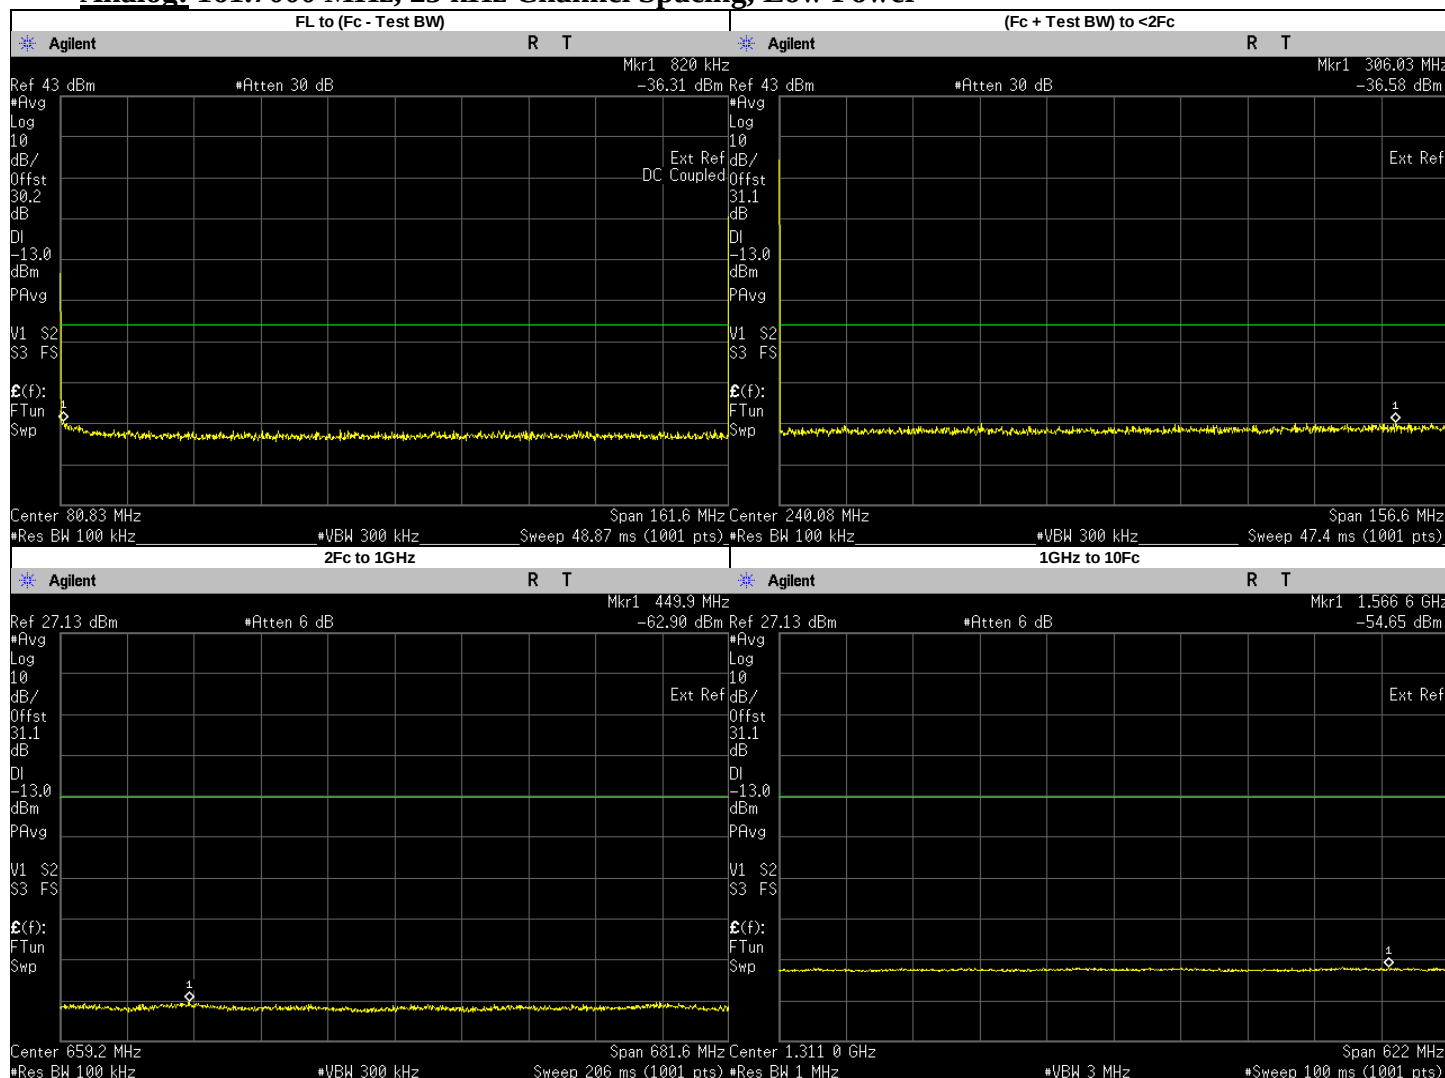

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.8200	-36.3050	-13	PASS
(Fc + Test BW) to <2Fc	306.0251	-36.5800	-13	PASS
2Fc to 1GHz	449.9488	-62.9000	-13	PASS
1GHz to 10Fc	323.4000	-64.1529	-13	PASS
	485.1000	-64.3165	-13	PASS
	646.8000	-65.2024	-13	PASS
	808.5000	-64.5833	-13	PASS
	970.2000	-64.6676	-13	PASS
	1566.6420	-54.6500	-13	PASS
	1131.9000	-55.3533	-13	PASS
	1293.6000	-54.9528	-13	PASS
	1455.3000	-55.2656	-13	PASS
	1617.0000	-55.0674	-13	PASS

Not for FCC review

Analog: 173.9875 MHz, 25 kHz Channel Spacing, Max Power

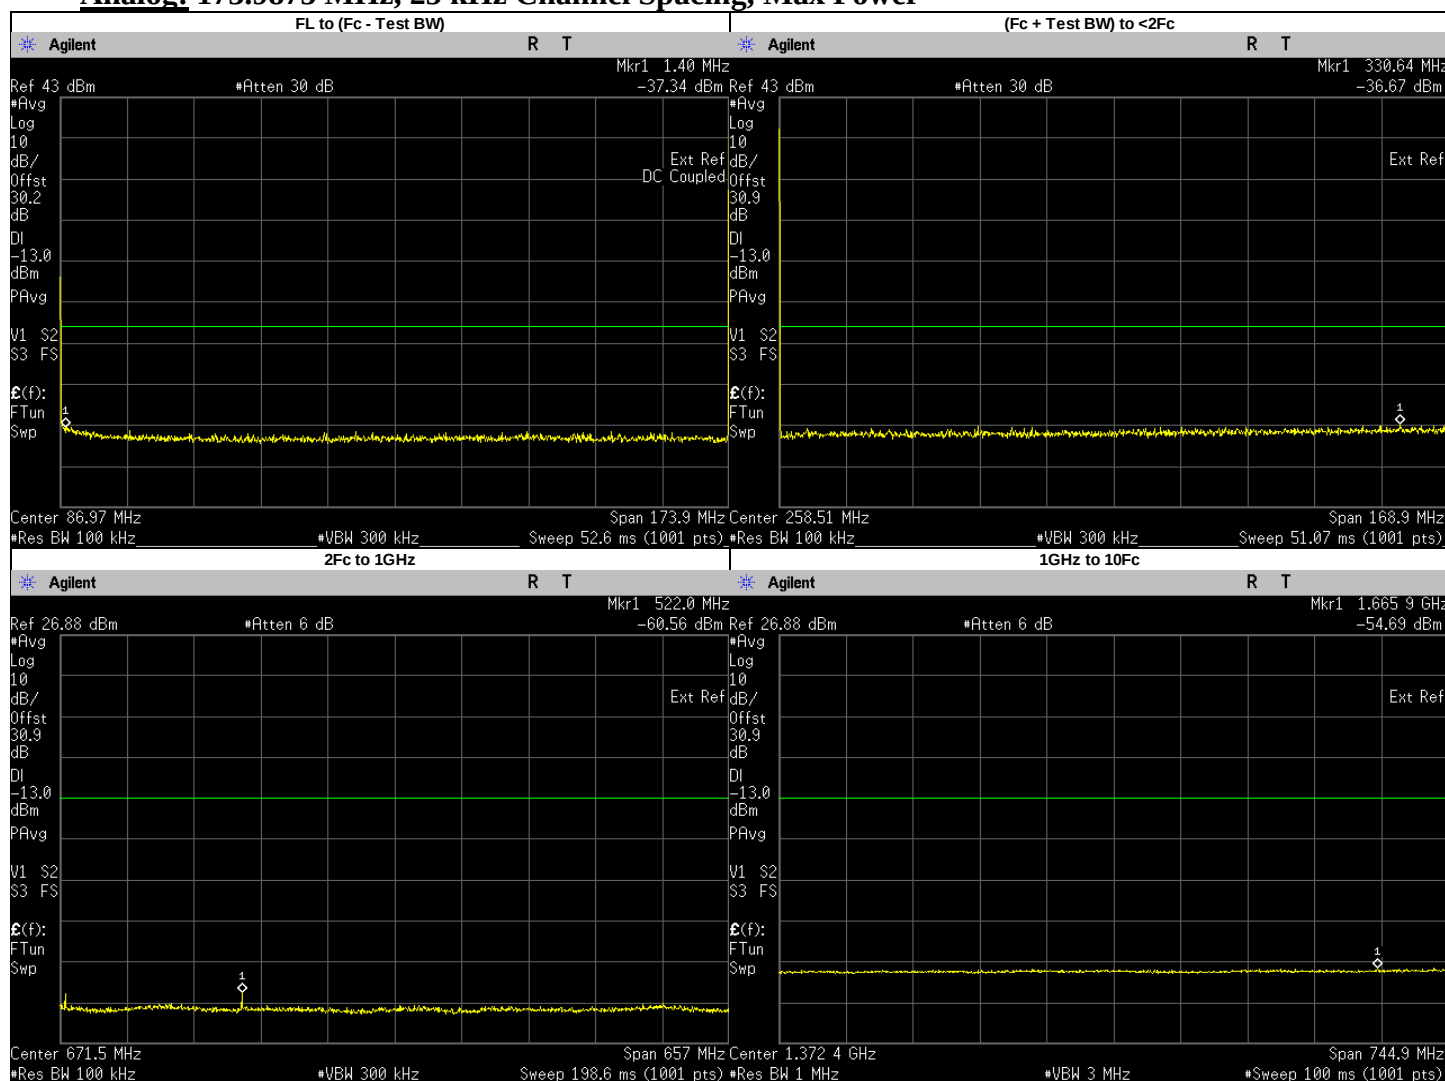


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4000	-37.3360	-13	PASS
(Fc + Test BW) to <2Fc	330.6430	-36.6700	-13	PASS
2Fc to 1GHz	521.9625	-60.5600	-13	PASS
1GHz to 10Fc	347.9750	-62.2409	-13	PASS
	695.9500	-64.8047	-13	PASS
	869.9375	-64.6852	-13	PASS
	1665.9180	-54.6900	-13	PASS
	1043.9250	-55.4687	-13	PASS
	1217.9120	-55.7418	-13	PASS
	1391.9000	-55.2994	-13	PASS
	1565.8880	-55.4906	-13	PASS
	1739.8750	-55.0505	-13	PASS

6.9.3. Test Result (Digital)


Not for FCC review

Digital: 138.0125 MHz, 12.5 kHz Channel Spacing, Max Power

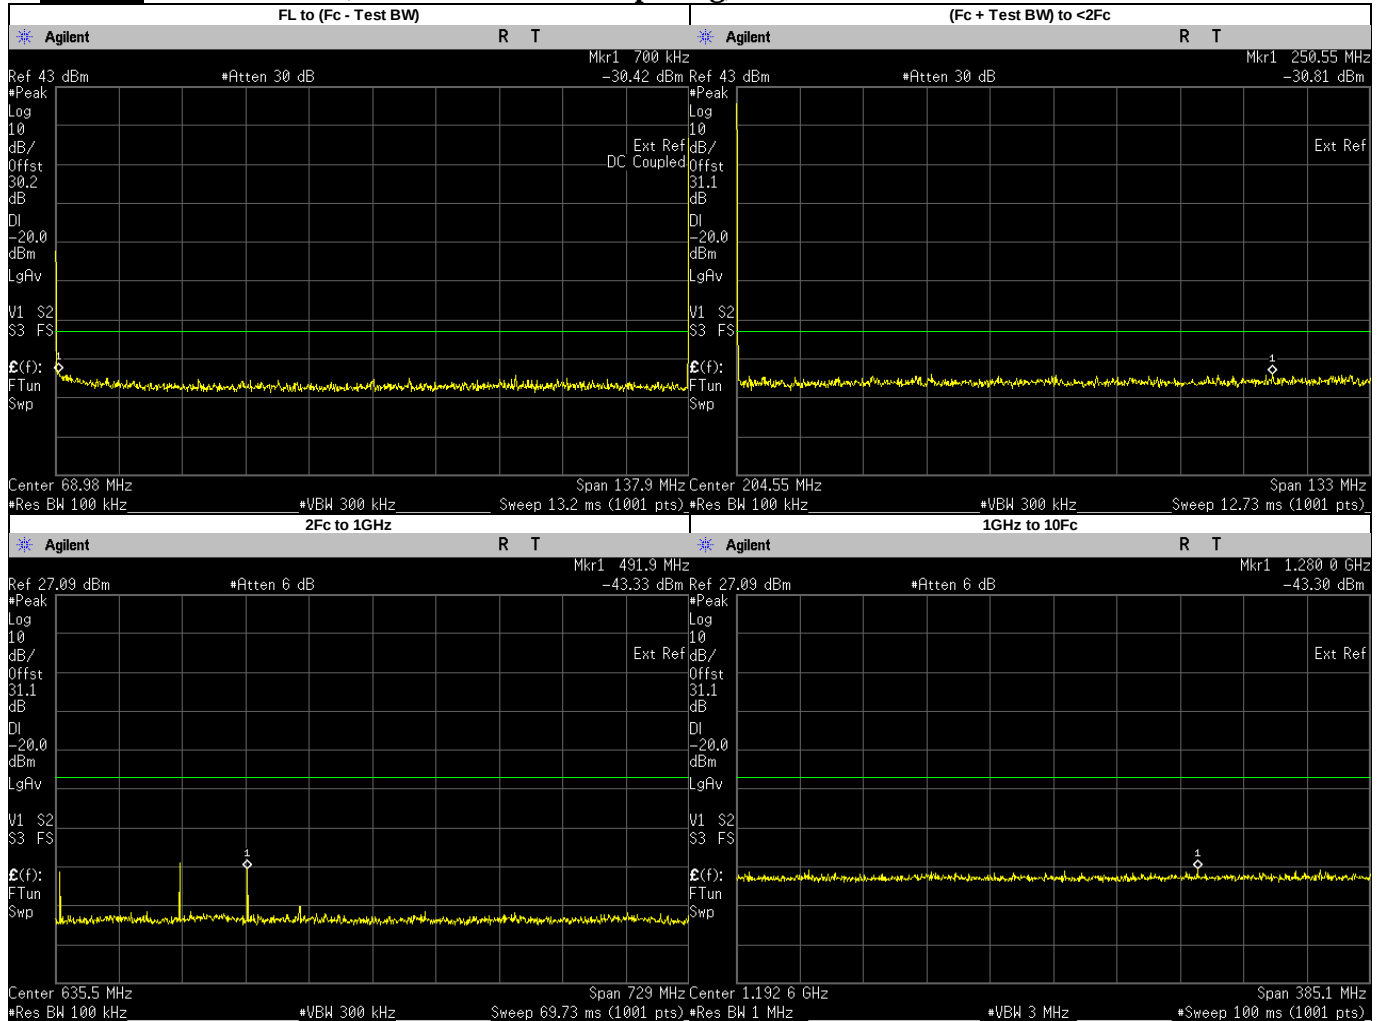


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.7000	-30.4220	-20	PASS
(Fc + Test BW) to <2Fc	250.5496	-30.8100	-20	PASS
2Fc to 1GHz	491.9044	-43.3300	-20	PASS
1GHz to 10Fc	276.0250	-45.9284	-20	PASS
	414.0375	-44.6767	-20	PASS
	552.0500	-52.9859	-20	PASS
	690.0625	-56.3370	-20	PASS
	828.0750	-56.6151	-20	PASS
	966.0875	-56.0130	-20	PASS
	1279.9860	-43.3000	-20	PASS
	1104.1000	-46.0208	-20	PASS
	1242.1120	-45.8617	-20	PASS
	1380.1250	-45.2607	-20	PASS

Digital: 158.5500 MHz, 12.5 kHz Channel Spacing, Max Power

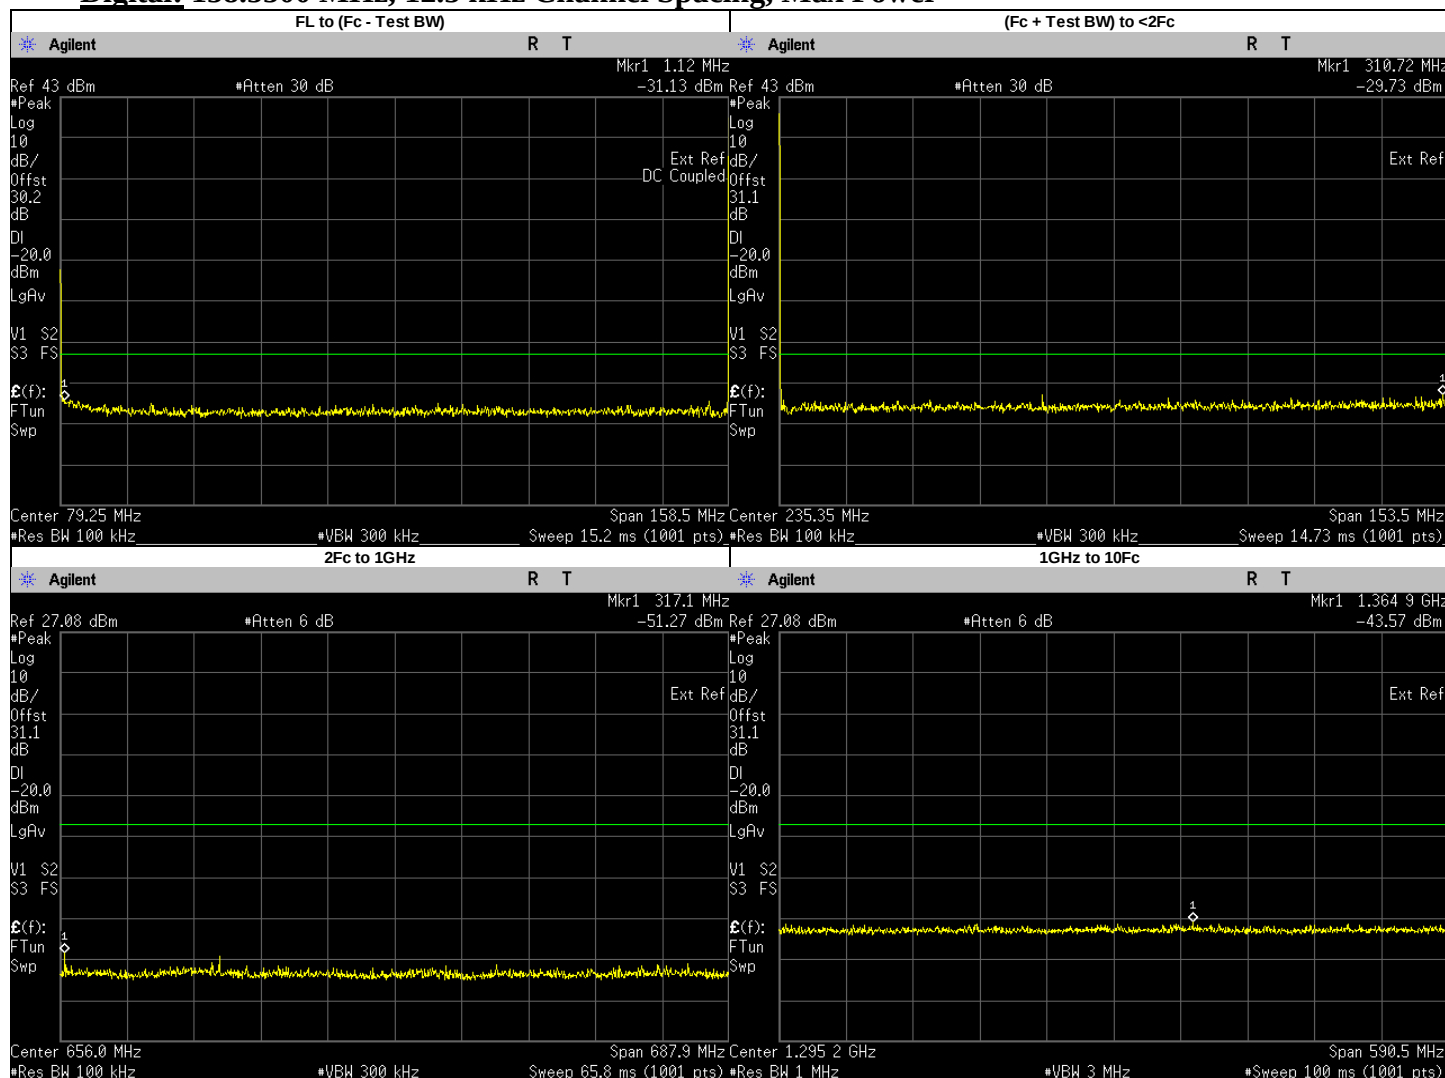


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1200	-31.1330	-20	PASS
(Fc + Test BW) to <2Fc	310.7186	-29.7300	-20	PASS
2Fc to 1GHz	317.1000	-51.2700	-20	PASS
1GHz to 10Fc	475.6500	-52.9056	-20	PASS
	634.2000	-55.4205	-20	PASS
	792.7500	-56.5250	-20	PASS
	951.3000	-55.3416	-20	PASS
	1364.9290	-43.5700	-20	PASS
	1109.8500	-45.7506	-20	PASS
	1268.4000	-45.9963	-20	PASS
	1426.9500	-45.6351	-20	PASS
	1585.5000	-45.9813	-20	PASS

Digital: 158.5500 MHz, 12.5 kHz Channel Spacing, Low Power

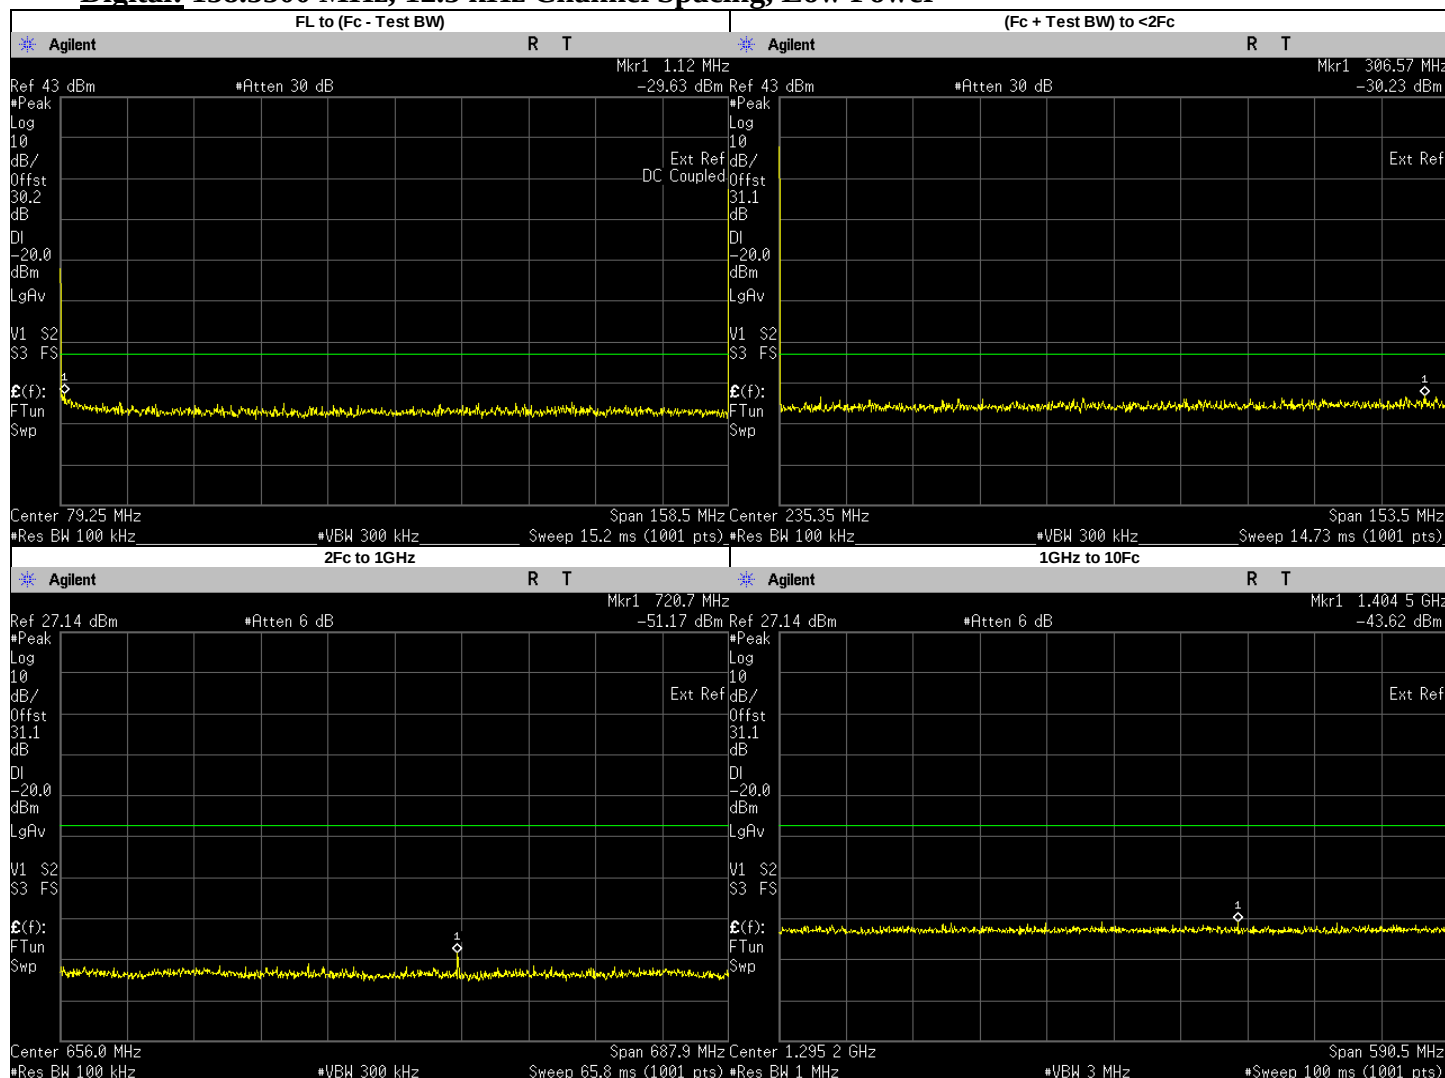


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.1200	-29.6270	-20	PASS
(Fc + Test BW) to <2Fc	306.5742	-30.2300	-20	PASS
2Fc to 1GHz	720.7126	-51.1700	-20	PASS
1GHz to 10Fc	317.1000	-55.8352	-20	PASS
	475.6500	-54.8257	-20	PASS
	634.2000	-57.4183	-20	PASS
	792.7500	-55.8477	-20	PASS
	951.3000	-55.8402	-20	PASS
	1404.4930	-43.6200	-20	PASS
	1109.8500	-46.2973	-20	PASS
	1268.4000	-45.5384	-20	PASS
	1426.9500	-45.5025	-20	PASS
	1585.5000	-45.5724	-20	PASS

Digital: 161.7000 MHz, 12.5 kHz Channel Spacing, Max Power

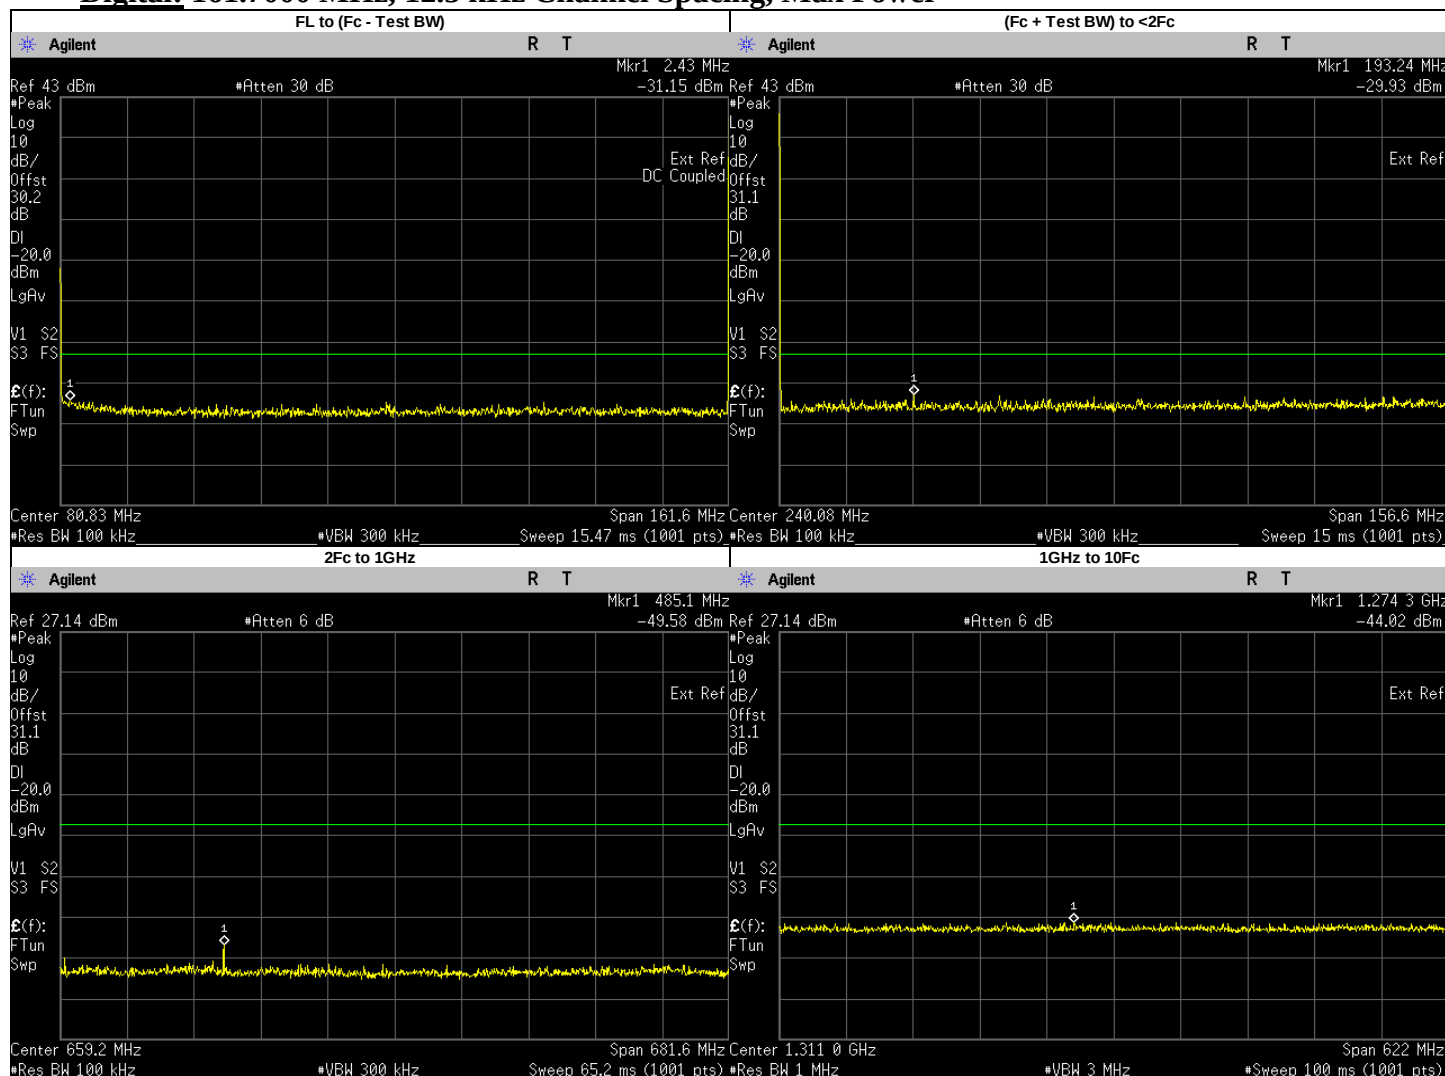


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.4300	-31.1510	-20	PASS
(Fc + Test BW) to <2Fc	193.2411	-29.9300	-20	PASS
2Fc to 1GHz	485.1000	-49.5800	-20	PASS
1GHz to 10Fc	323.4000	-54.1643	-20	PASS
	646.8000	-54.7119	-20	PASS
	808.5000	-56.0658	-20	PASS
	970.2000	-56.5120	-20	PASS
	1274.3020	-44.0200	-20	PASS
	1131.9000	-46.0133	-20	PASS
	1293.6000	-44.8098	-20	PASS
	1455.3000	-46.1622	-20	PASS
	1617.0000	-45.5804	-20	PASS

Digital: 161.7000 MHz, 12.5 kHz Channel Spacing, Low Power

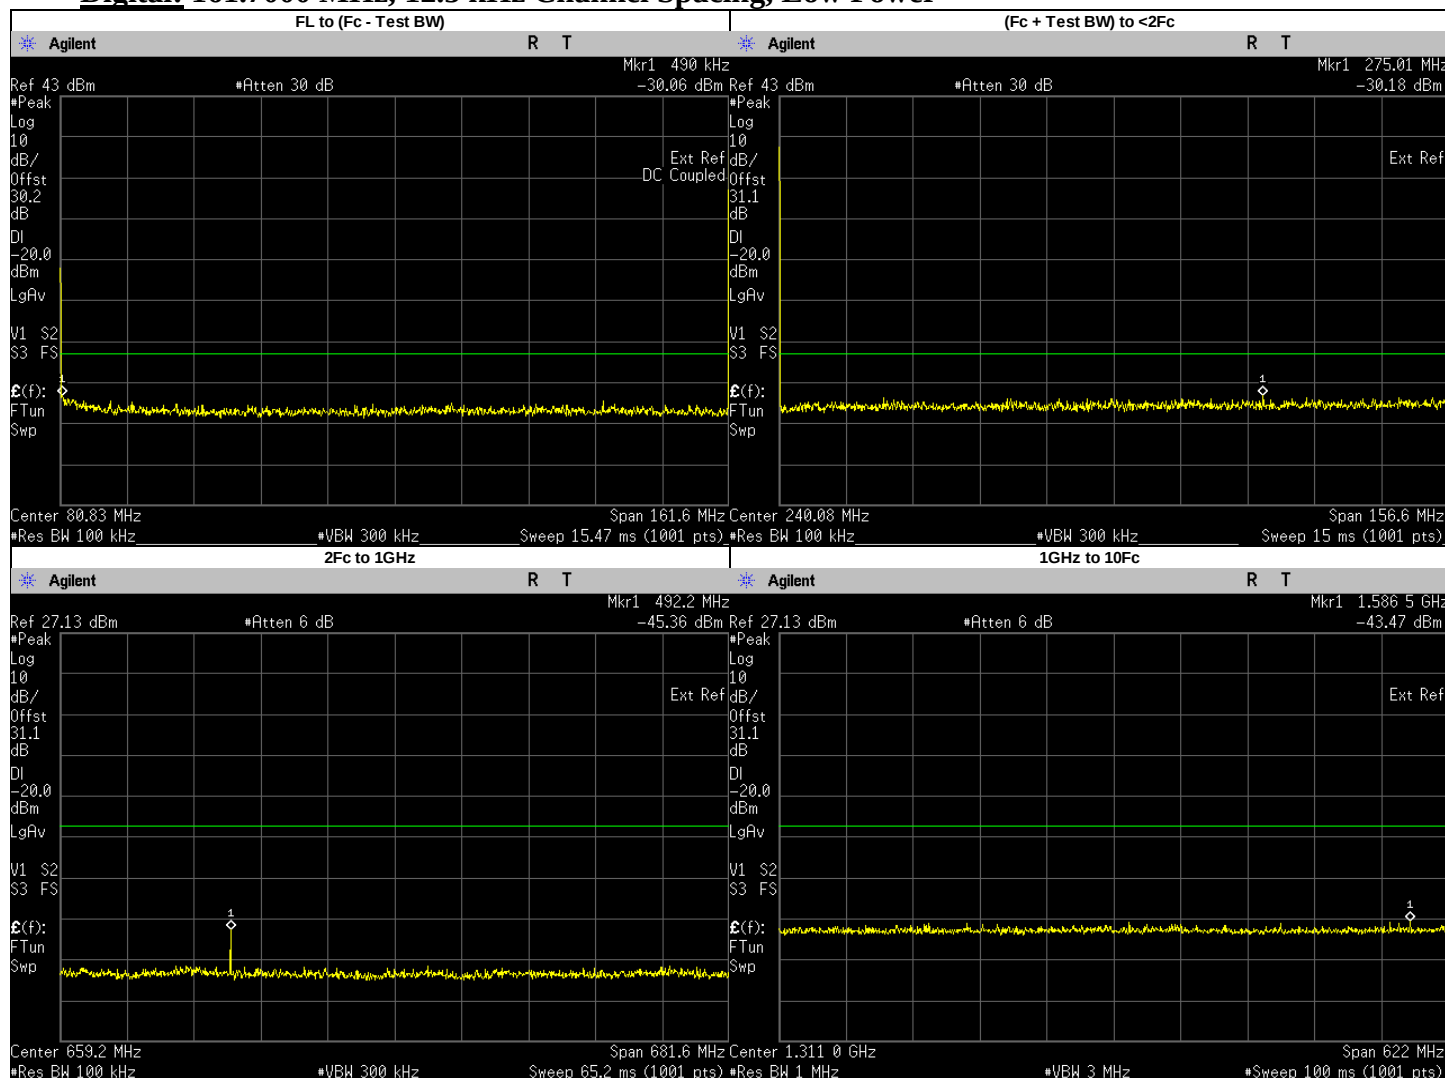

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4900	-30.0580	-20	PASS
(Fc + Test BW) to <2Fc	275.0095	-30.1800	-20	PASS
2Fc to 1GHz	492.2080	-45.3600	-20	PASS
1GHz to 10Fc	323.4000	-56.0473	-20	PASS
	485.1000	-55.8488	-20	PASS
	646.8000	-56.9611	-20	PASS
	808.5000	-56.7940	-20	PASS
	970.2000	-55.5311	-20	PASS
	1586.5460	-43.4680	-20	PASS
	1131.9000	-46.1630	-20	PASS
	1293.6000	-44.9511	-20	PASS
	1455.3000	-45.7811	-20	PASS
	1617.0000	-45.4289	-20	PASS


Digital: 173.3875 MHz, 12.5 kHz Channel Spacing, Max Power

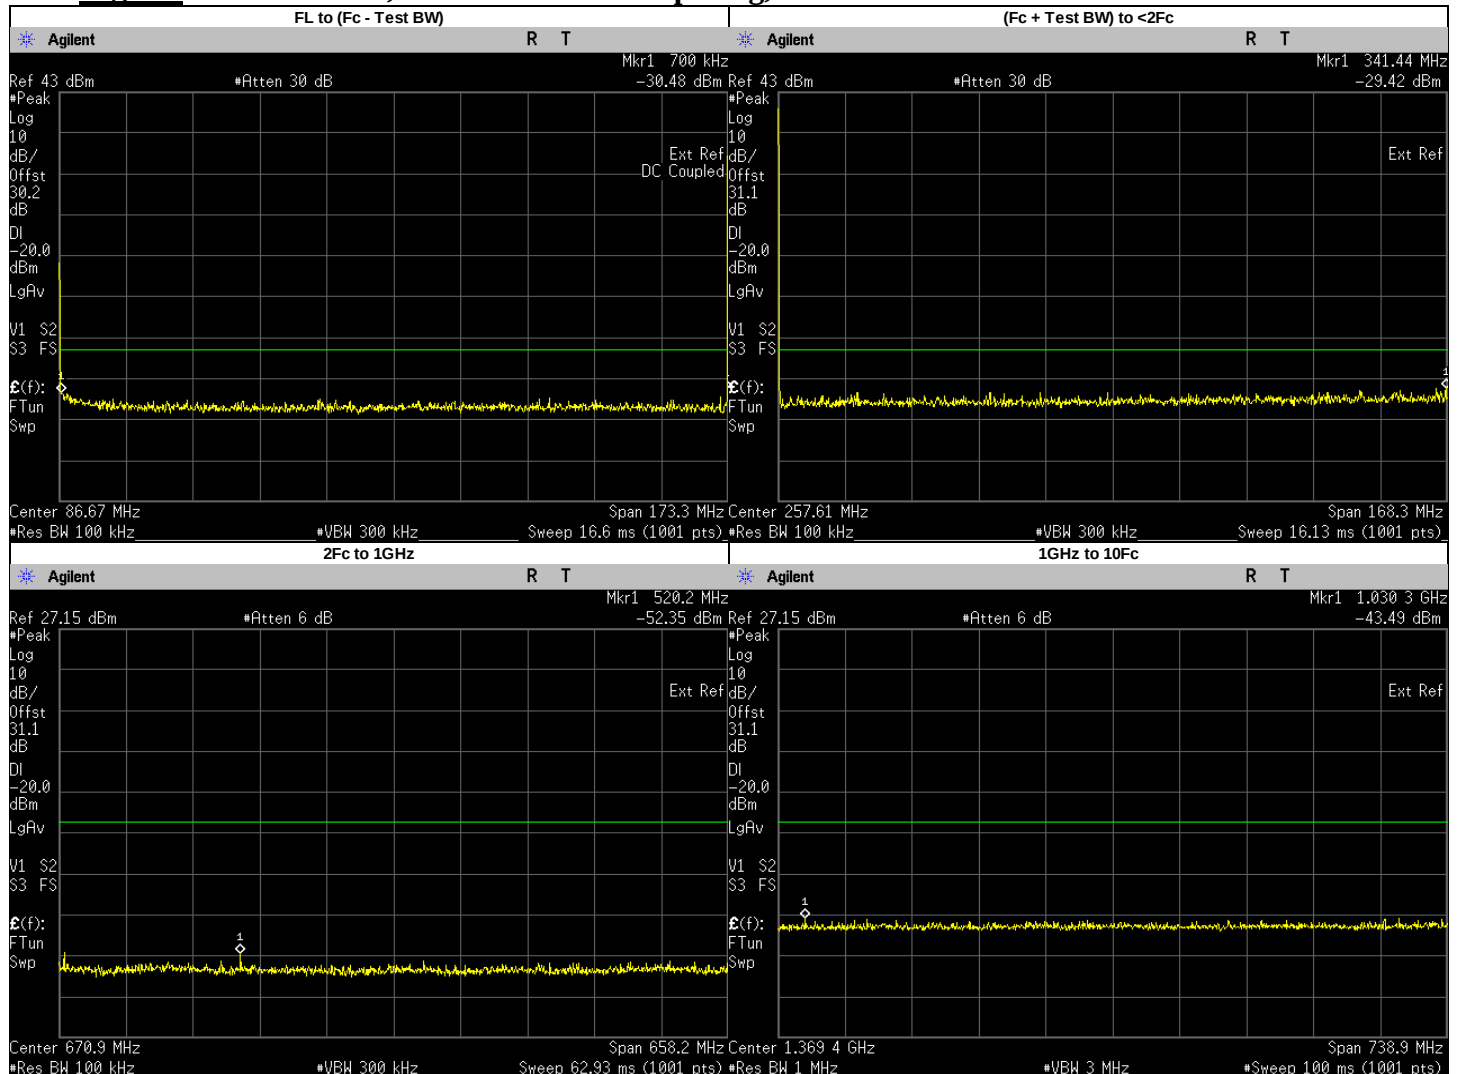

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.7000	-30.4820	-20	PASS
(Fc + Test BW) to <2Fc	341.4383	-29.4230	-20	PASS
2Fc to 1GHz	520.1625	-52.3500	-20	PASS
1GHz to 10Fc	346.7750	-53.1717	-20	PASS
	693.5500	-56.5421	-20	PASS
	866.9375	-56.9100	-20	PASS
	1030.2940	-43.4900	-20	PASS
	1040.3250	-45.0937	-20	PASS
	1213.7130	-45.9110	-20	PASS
	1387.1000	-45.0915	-20	PASS
	1560.4870	-44.8321	-20	PASS
	1733.8750	-45.2492	-20	PASS


Not for FCC review

Phase II: 138.0125 MHz, 12.5 kHz Channel Spacing, Max Power

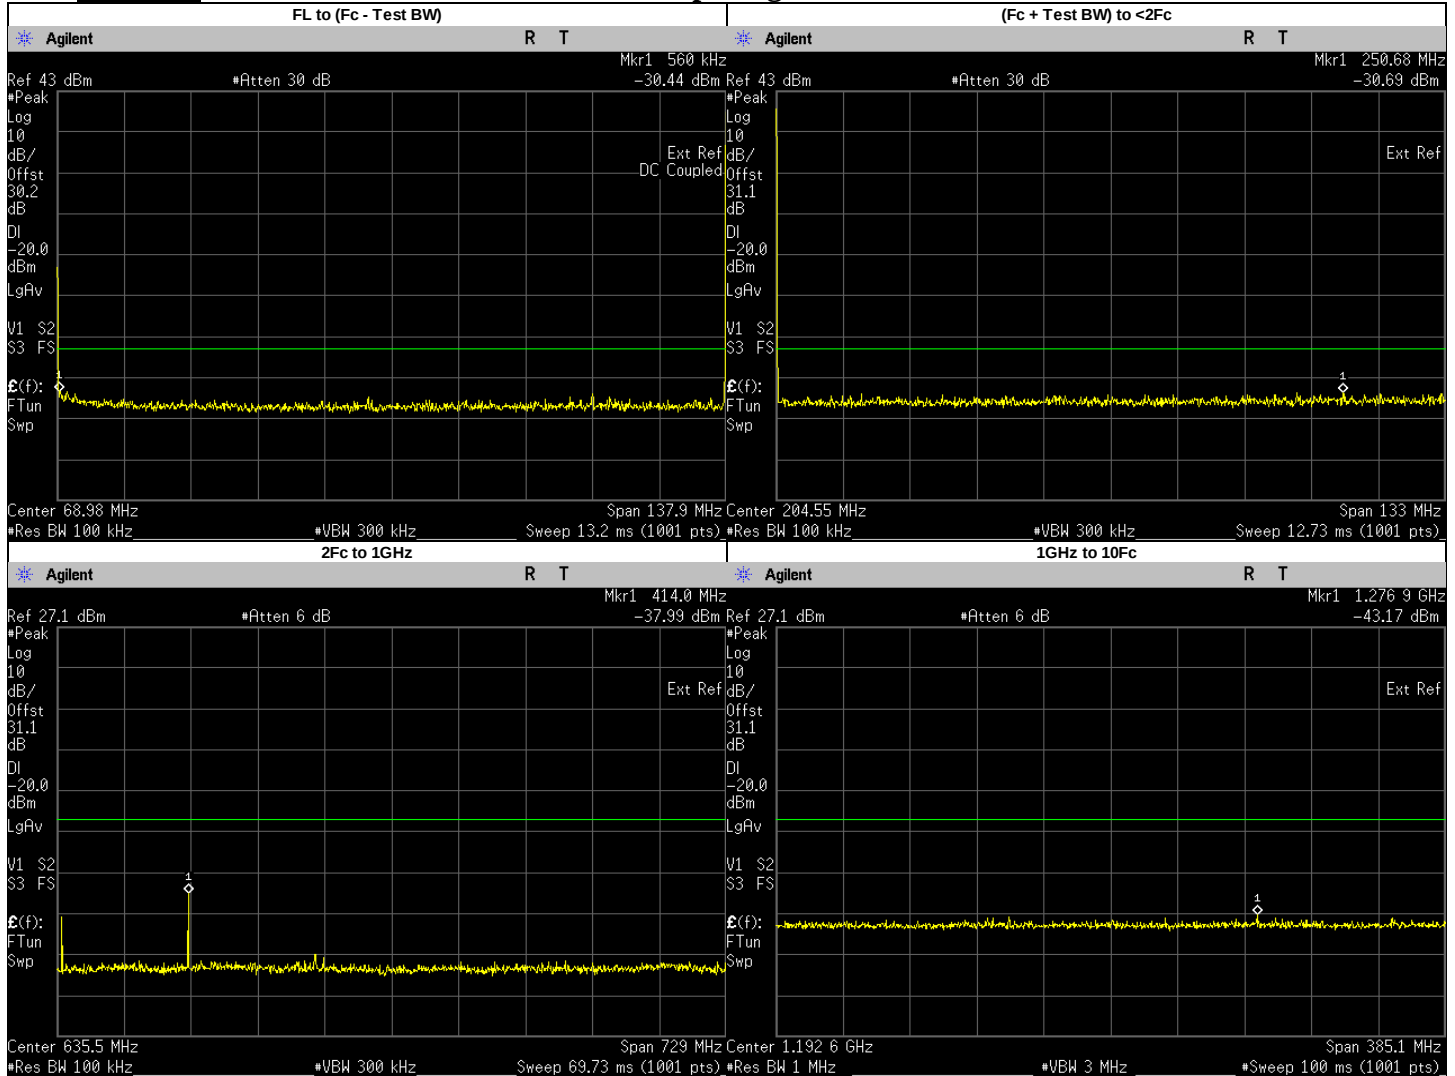


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.5600	-30.4420	-20	PASS
(Fc + Test BW) to <2Fc	250.6826	-30.6900	-20	PASS
2Fc to 1GHz	414.0375	-37.9900	-20	PASS
1GHz to 10Fc	276.0250	-45.4561	-20	PASS
	552.0500	-52.7586	-20	PASS
	690.0625	-56.3324	-20	PASS
	828.0750	-56.0889	-20	PASS
	966.0875	-55.9114	-20	PASS
	1276.9050	-43.1700	-20	PASS
	1104.1000	-45.5694	-20	PASS
	1242.1120	-45.9133	-20	PASS
	1380.1250	-45.9846	-20	PASS

Phase II: 158.5500 MHz, 12.5 kHz Channel Spacing, Max Power

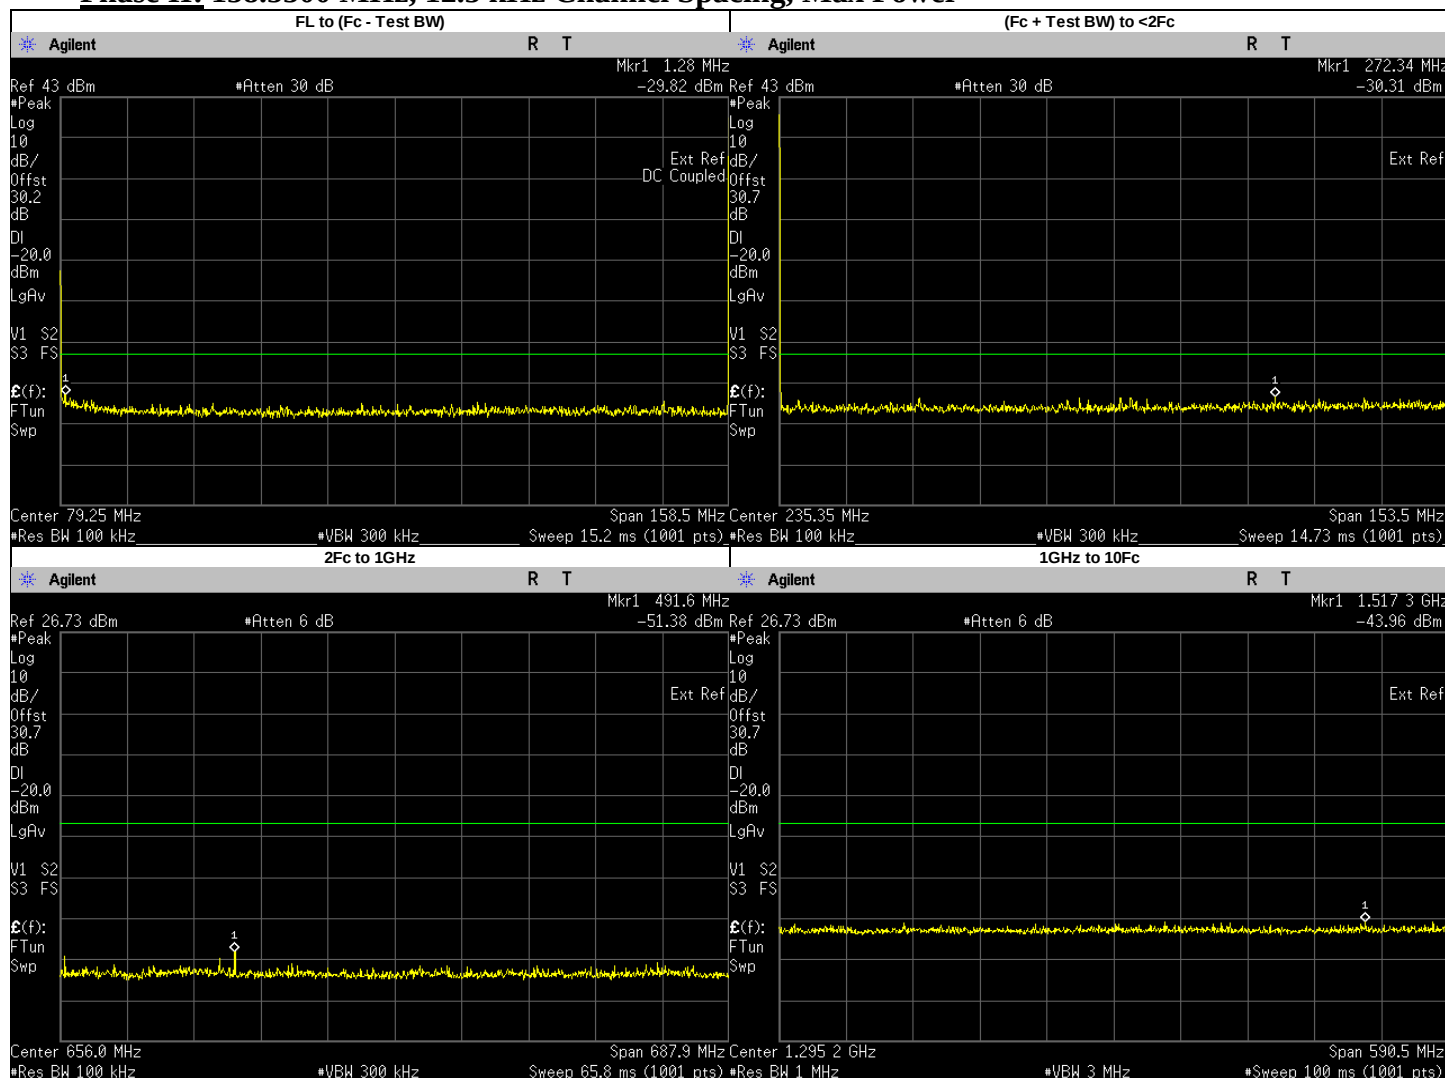


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.2800	-29.8190	-20	PASS
(Fc + Test BW) to <2Fc	272.3450	-30.3100	-20	PASS
2Fc to 1GHz	491.6419	-51.3800	-20	PASS
1GHz to 10Fc	317.1000	-53.6640	-20	PASS
	475.6500	-53.6249	-20	PASS
	634.2000	-55.5963	-20	PASS
	792.7500	-56.9392	-20	PASS
	951.3000	-56.9623	-20	PASS
	1517.2780	-43.9500	-20	PASS
	1109.8500	-44.4182	-20	PASS
	1268.4000	-46.1342	-20	PASS
	1426.9500	-46.1410	-20	PASS
	1585.5000	-45.4006	-20	PASS

Phase II: 158.5500 MHz, 12.5 kHz Channel Spacing, Low Power

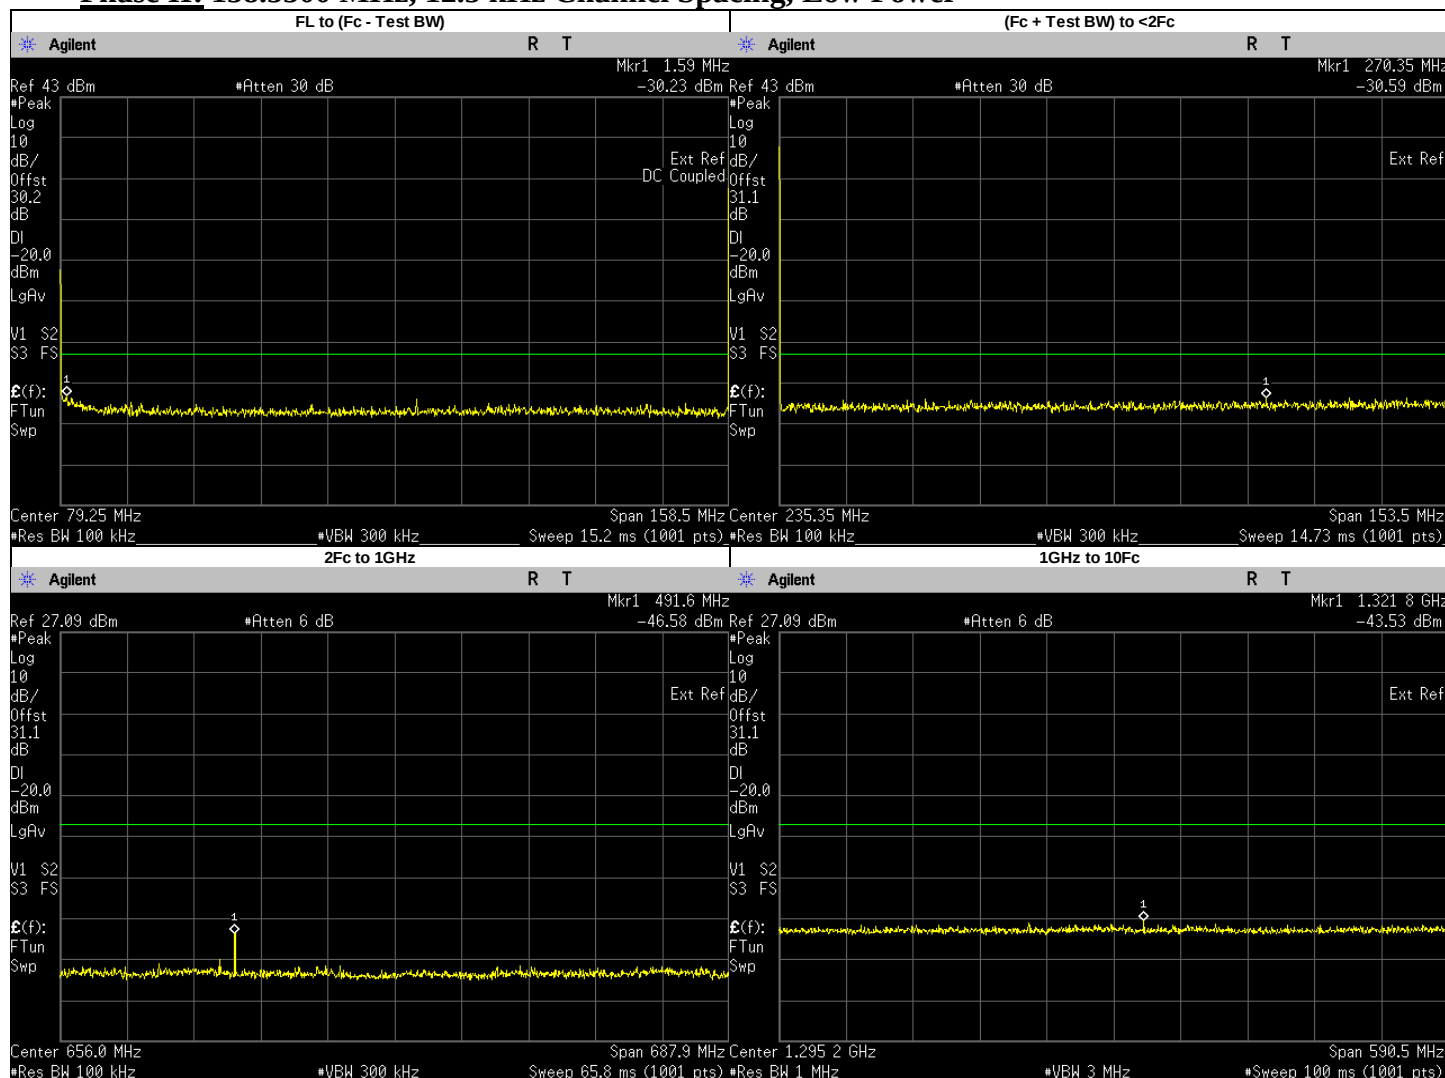


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.5900	-30.2270	-20	PASS
(Fc + Test BW) to <2Fc	270.3495	-30.5900	-20	PASS
2Fc to 1GHz	491.6419	-46.5800	-20	PASS
1GHz to 10Fc	317.1000	-55.4989	-20	PASS
	475.6500	-53.7120	-20	PASS
	634.2000	-57.2245	-20	PASS
	792.7500	-56.4101	-20	PASS
	951.3000	-56.2840	-20	PASS
	1321.8220	-43.5300	-20	PASS
	1109.8500	-45.9145	-20	PASS
	1268.4000	-45.0318	-20	PASS
	1426.9500	-46.6169	-20	PASS
	1585.5000	-45.6590	-20	PASS

Phase II: 161.7000 MHz, 12.5 kHz Channel Spacing, Max Power

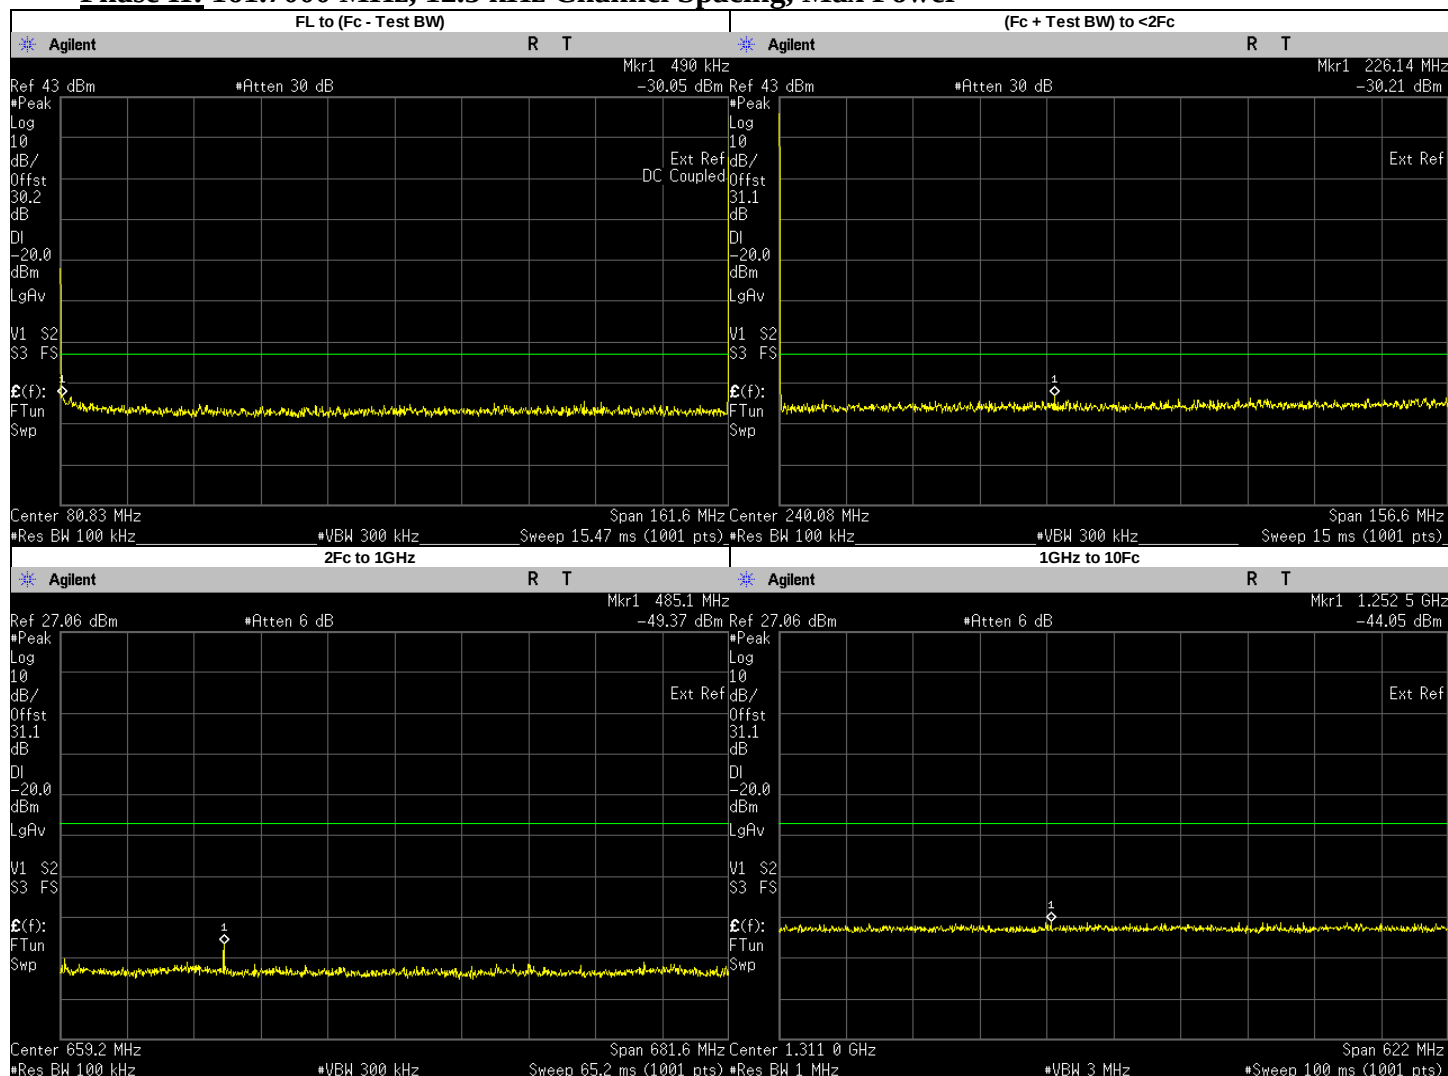


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4900	-30.0470	-20	PASS
(Fc + Test BW) to <2Fc	226.1365	-30.2100	-20	PASS
2Fc to 1GHz	485.1000	-49.3700	-20	PASS
1GHz to 10Fc	323.4000	-53.8742	-20	PASS
	646.8000	-55.9894	-20	PASS
	808.5000	-57.1265	-20	PASS
	970.2000	-56.8756	-20	PASS
	1252.5320	-44.0500	-20	PASS
	1131.9000	-45.1808	-20	PASS
	1293.6000	-45.7626	-20	PASS
	1455.3000	-45.1787	-20	PASS
	1617.0000	-45.5260	-20	PASS

Phase II: 161.7000 MHz, 12.5 kHz Channel Spacing, Low Power

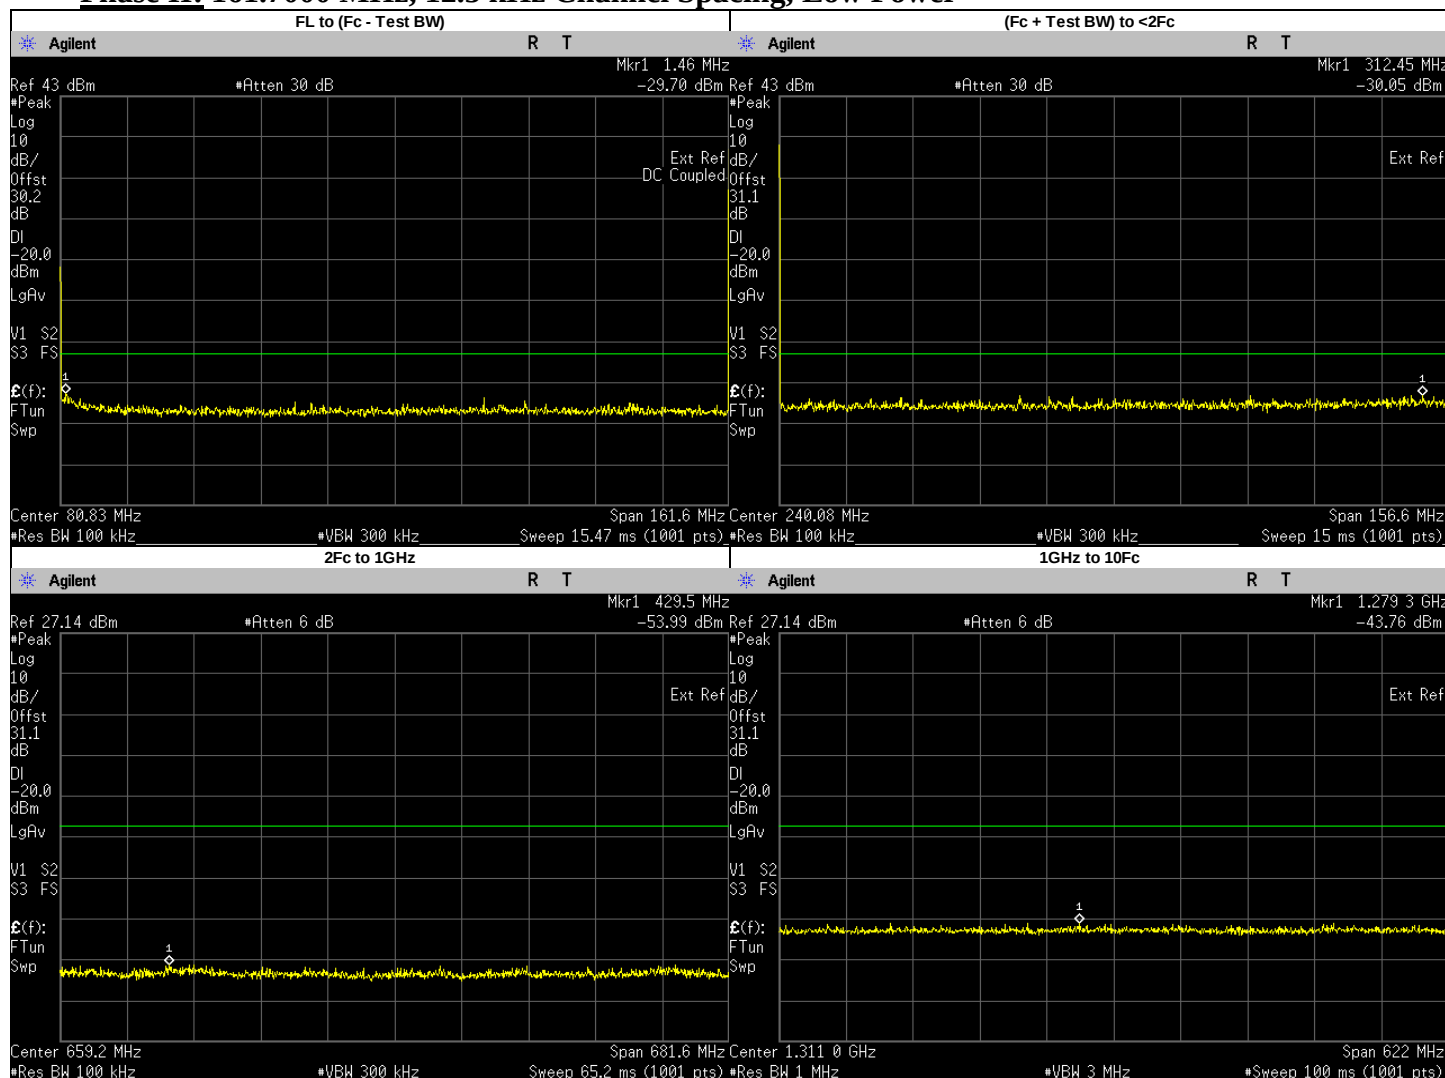

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4600	-29.7040	-20	PASS
(Fc + Test BW) to <2Fc	312.4475	-30.0500	-20	PASS
2Fc to 1GHz	429.5008	-53.9900	-20	PASS
1GHz to 10Fc	323.4000	-55.9596	-20	PASS
	485.1000	-55.6552	-20	PASS
	646.8000	-56.7868	-20	PASS
	808.5000	-57.0729	-20	PASS
	970.2000	-56.8039	-20	PASS
	1279.2780	-43.7600	-20	PASS
	1131.9000	-44.8556	-20	PASS
	1293.6000	-45.6089	-20	PASS
	1455.3000	-45.8890	-20	PASS
	1617.0000	-45.6794	-20	PASS

Phase II: 173.3875 MHz, 12.5 kHz Channel Spacing, Max Power

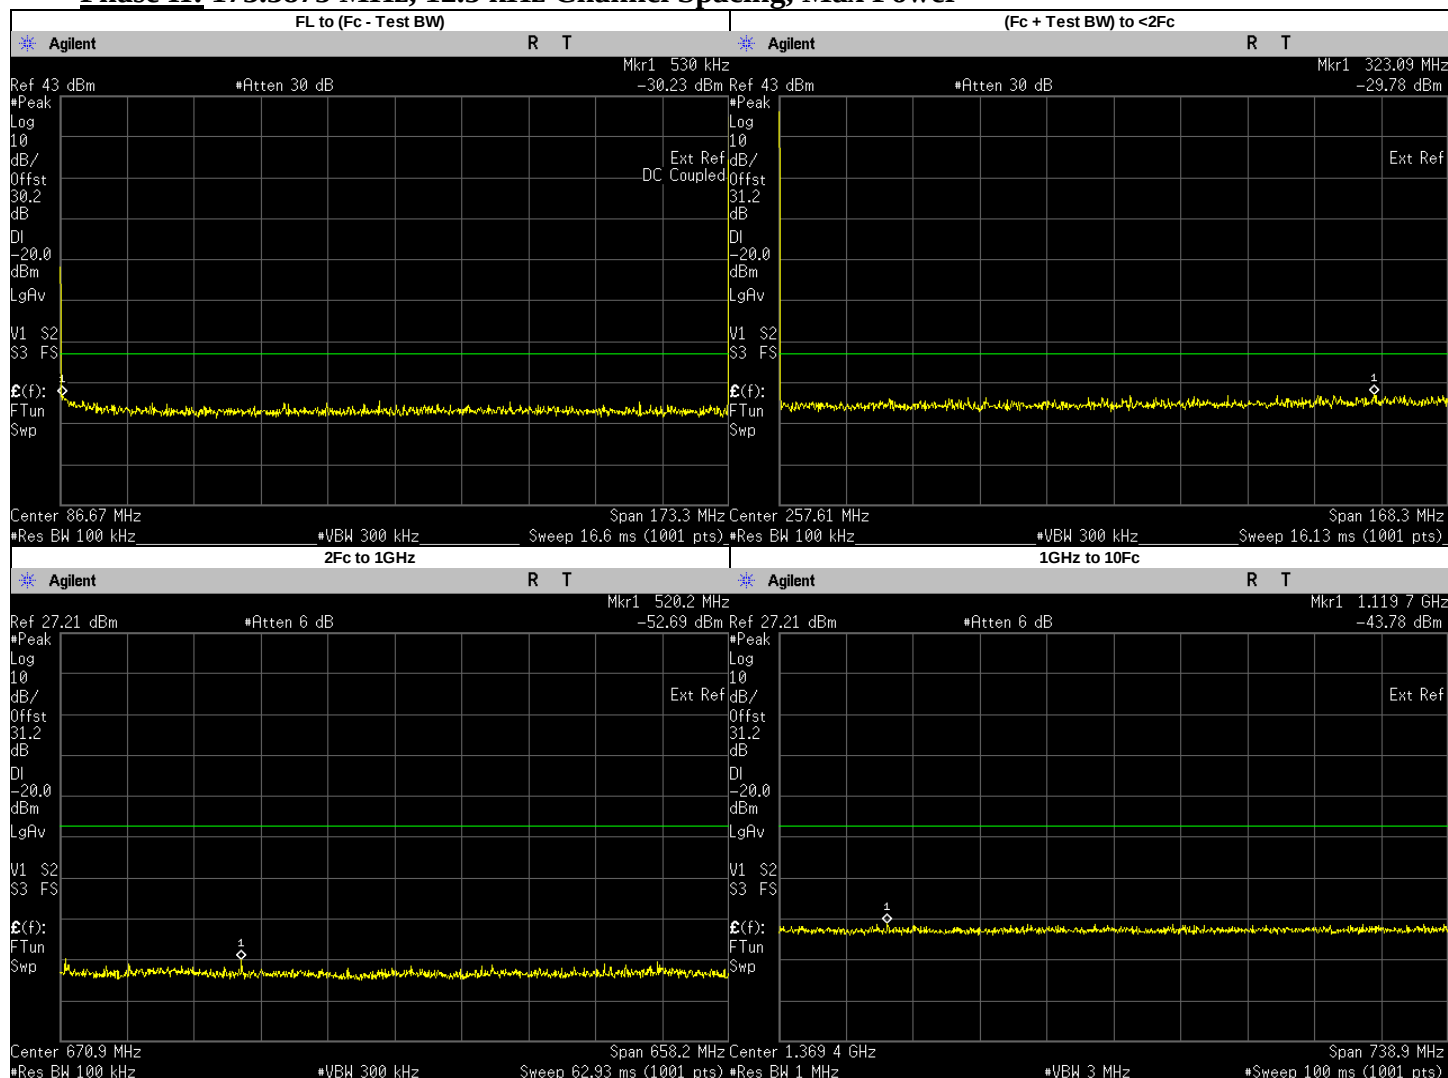

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.5300	-30.2260	-20	PASS
(Fc + Test BW) to <2Fc	323.0902	-29.7800	-20	PASS
2Fc to 1GHz	520.1625	-52.6900	-20	PASS
1GHz to 10Fc	346.7750	-53.3778	-20	PASS
	693.5500	-56.4094	-20	PASS
	866.9375	-55.5104	-20	PASS
	1119.6980	-43.7800	-20	PASS
	1040.3250	-45.7405	-20	PASS
	1213.7130	-45.3247	-20	PASS
	1387.1000	-45.5400	-20	PASS
	1560.4870	-45.0910	-20	PASS
	1733.8750	-45.2259	-20	PASS

6.9.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.10. Radiated Spurious Emission

6.10.1. Test Setup

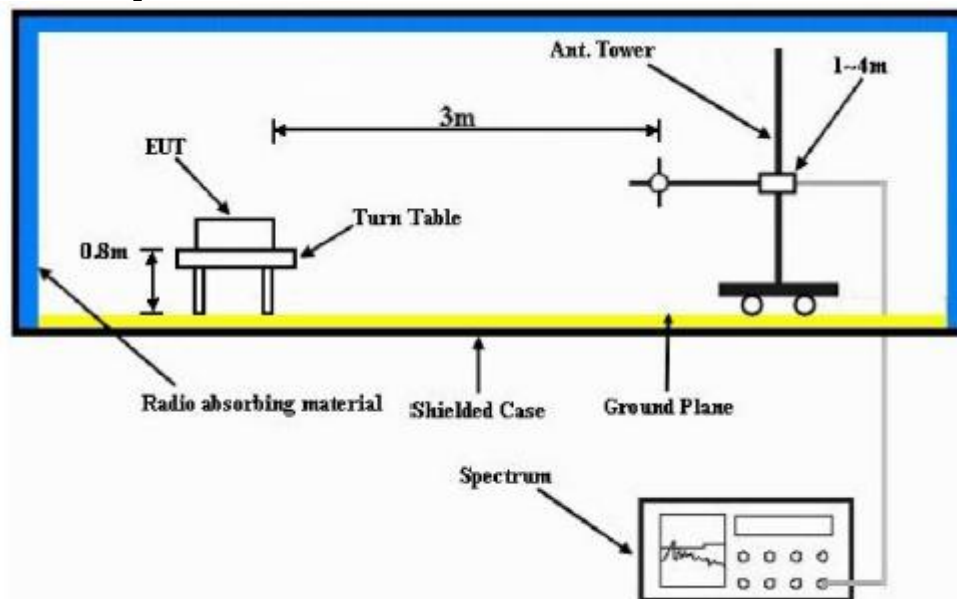


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.10.2. Test Result (Analog)

Not for FCC review

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX Analog
 138.012500 MHz 25 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-13.0000	-93.7633 **	-93.0720 **
414.0375	-13.0000	-89.9933 **	-88.2103 **
552.0500	-13.0000	-84.9450 **	-82.9896 **
690.0625	-13.0000	-85.4591 **	-85.6883 **
828.0750	-13.0000	-82.0943 **	-82.4354 **
966.0875	-13.0000	-81.4261 **	-81.1891 **
1104.1000	-13.0000	-61.9322 **	-63.3213 **
1242.1125	-13.0000	-62.1410 **	-62.6760 **
1380.1250	-13.0000	-61.6726 **	-61.5809 **

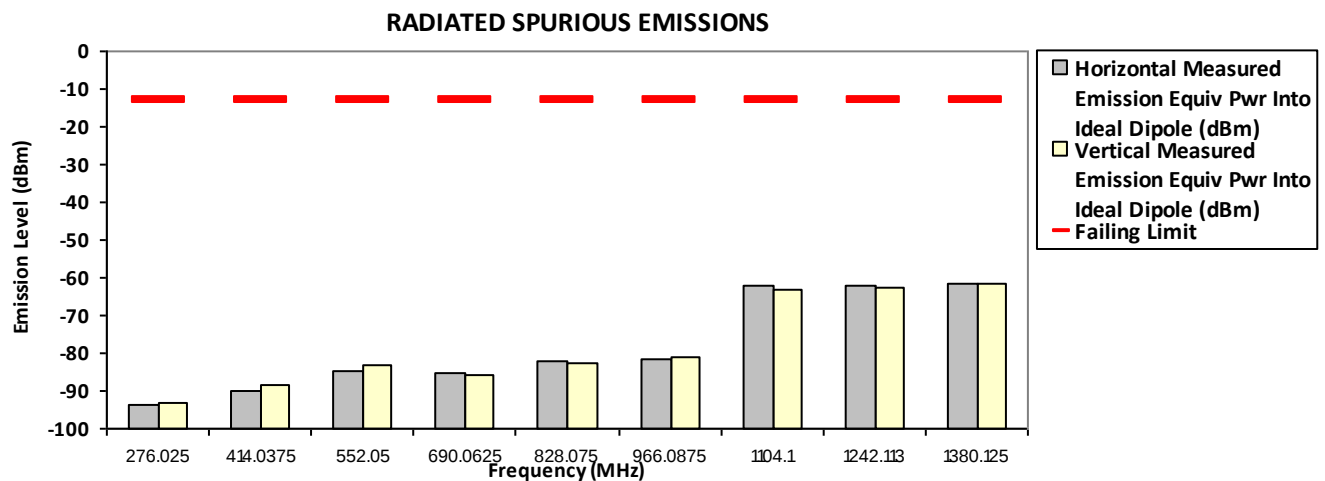

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX Analog
 158.550000 MHz 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-93.3787 **	-91.6709 **
475.6500	-13.0000	-88.5276 **	-87.7377 **
634.2000	-13.0000	-85.4731 **	-85.5026 **
792.7500	-13.0000	-83.4690 **	-82.1915 **
951.3000	-13.0000	-81.5196 **	-80.5263 **
1109.8500	-13.0000	-62.9725 **	-61.8862 **
1268.4000	-13.0000	-62.1531 **	-61.7258 **
1426.9500	-13.0000	-60.9339 **	-61.9592 **
1585.5000	-13.0000	-61.4883 **	-61.6077 **

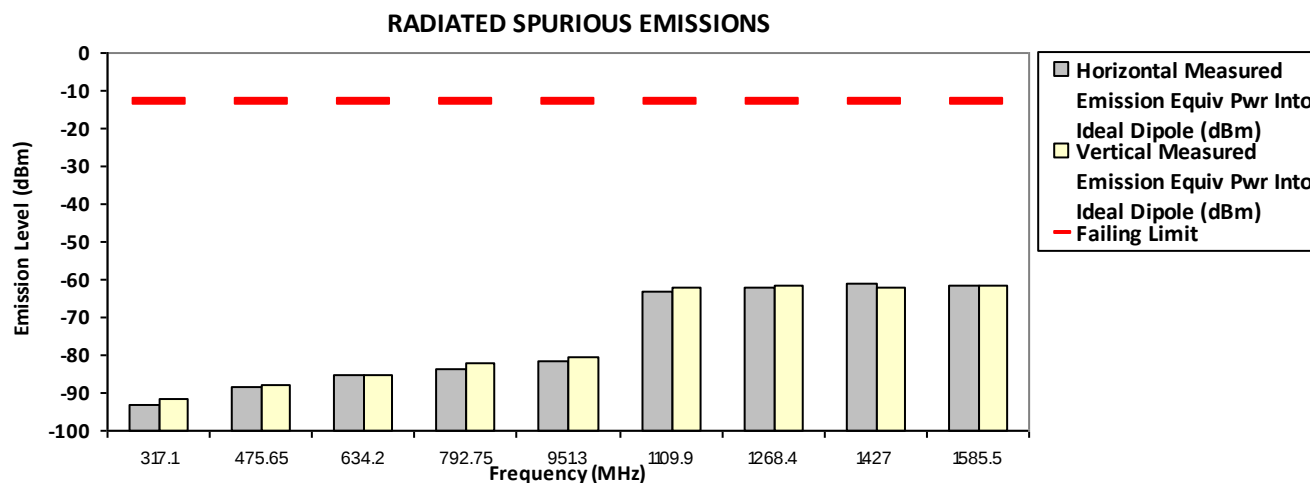

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX Analog
 158.550000 MHz 25 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-93.2868 **	-94.2460 **
475.6500	-13.0000	-87.2872 **	-86.5301 **
634.2000	-13.0000	-85.7216 **	-85.2950 **
792.7500	-13.0000	-83.4829 **	-82.8146 **
951.3000	-13.0000	-81.3756 **	-81.9037 **
1109.8500	-13.0000	-63.2219 **	-62.0333 **
1268.4000	-13.0000	-61.6697 **	-60.5644 **
1426.9500	-13.0000	-61.7081 **	-60.7272 **
1585.5000	-13.0000	-60.7311 **	-60.2829 **

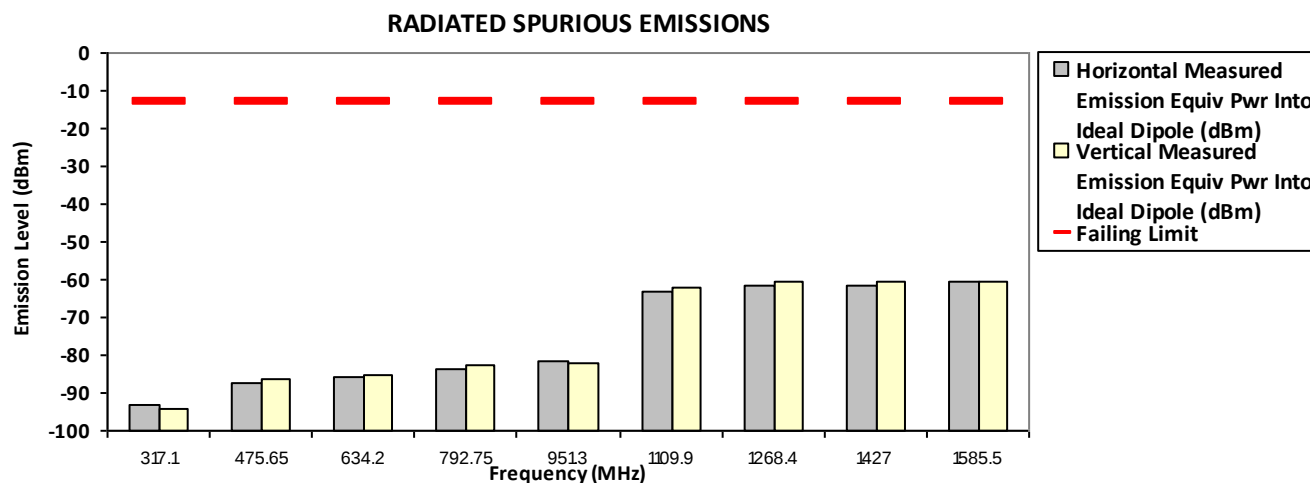

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Test Mode: TX Analog Accy Part No: NA
 161.700000 MHz 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-91.7649 **	-92.3370 **
485.1000	-13.0000	-87.3269 **	-88.0721 **
646.8000	-13.0000	-85.1932 **	-84.8609 **
808.5000	-13.0000	-82.3503 **	-82.9788 **
970.2000	-13.0000	-81.2046 **	-81.0710 **
1131.9000	-13.0000	-62.1800 **	-62.3561 **
1293.6000	-13.0000	-62.0105 **	-62.3510 **
1455.3000	-13.0000	-62.6891 **	-62.4408 **
1617.0000	-13.0000	-60.2105 **	-60.0287 **

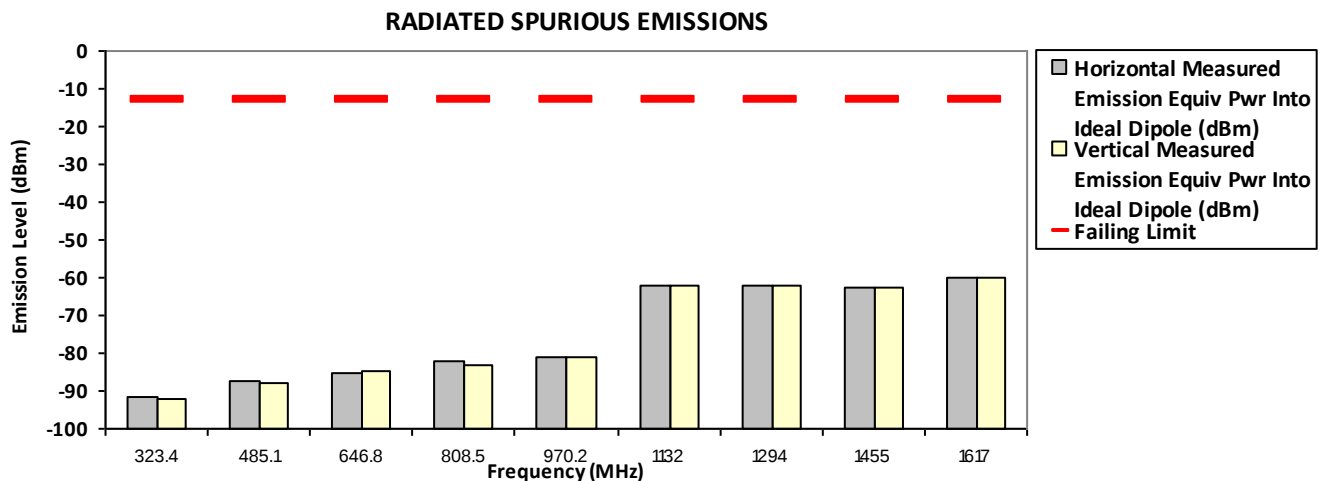

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
Battery Part No: PMNN4818A Accy Part No: NA
Test Mode: TX Analog
161.700000 MHz 25 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-93.4299 **	-93.5882 **
485.1000	-13.0000	-87.3872 **	-88.1077 **
646.8000	-13.0000	-84.4134 **	-85.0971 **
808.5000	-13.0000	-82.8022 **	-82.1464 **
970.2000	-13.0000	-80.6316 **	-80.9224 **
1131.9000	-13.0000	-62.9195 **	-62.7194 **
1293.6000	-13.0000	-62.0075 **	-61.5003 **
1455.3000	-13.0000	-61.4047 **	-61.6905 **
1617.0000	-13.0000	-60.5881 **	-59.5960 **

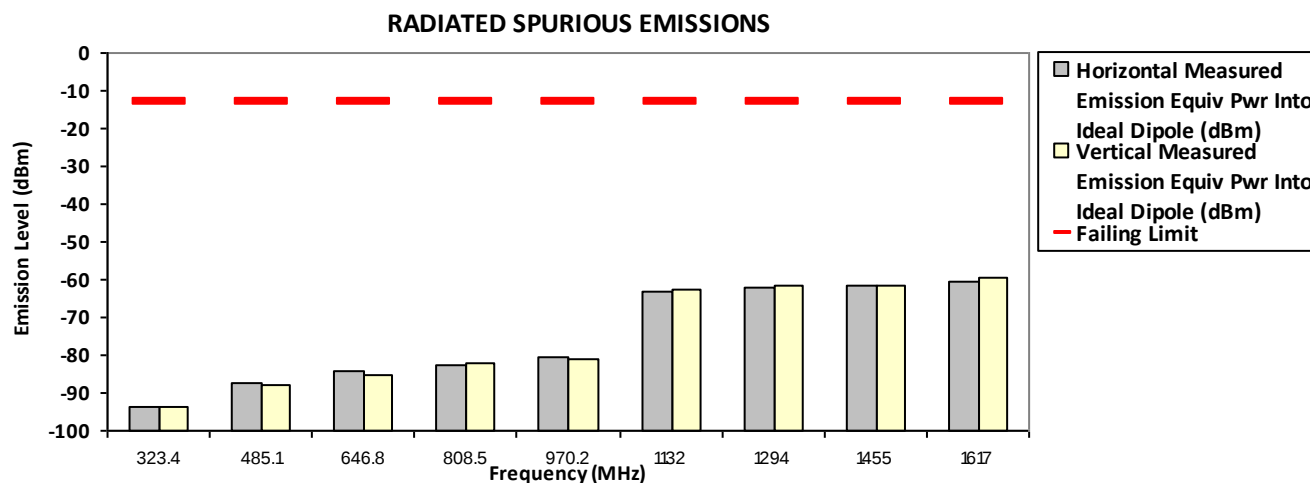

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Not for FCC review

SAC Transmitter Radiated Emission:

Model Number: H35KET9PW8AN-H

S/N: 022TAF1508

SR:30468-EMC-00041

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Analog

173.987500 MHz

25 kHz

6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
347.9750	-13.0000	-92.4070 **	-92.7566 **
521.9625	-13.0000	-87.4696 **	-85.9543 **
695.9500	-13.0000	-85.6519 **	-84.5921 **
869.9375	-13.0000	-80.8266 **	-81.8219 **
1043.9250	-13.0000	-62.5424 **	-63.2567 **
1217.9125	-13.0000	-61.8359 **	-62.3814 **
1391.9000	-13.0000	-61.5364 **	-62.0709 **
1565.8875	-13.0000	-61.1269 **	-61.4621 **
1739.8750	-13.0000	-59.7991 **	-59.7806 **

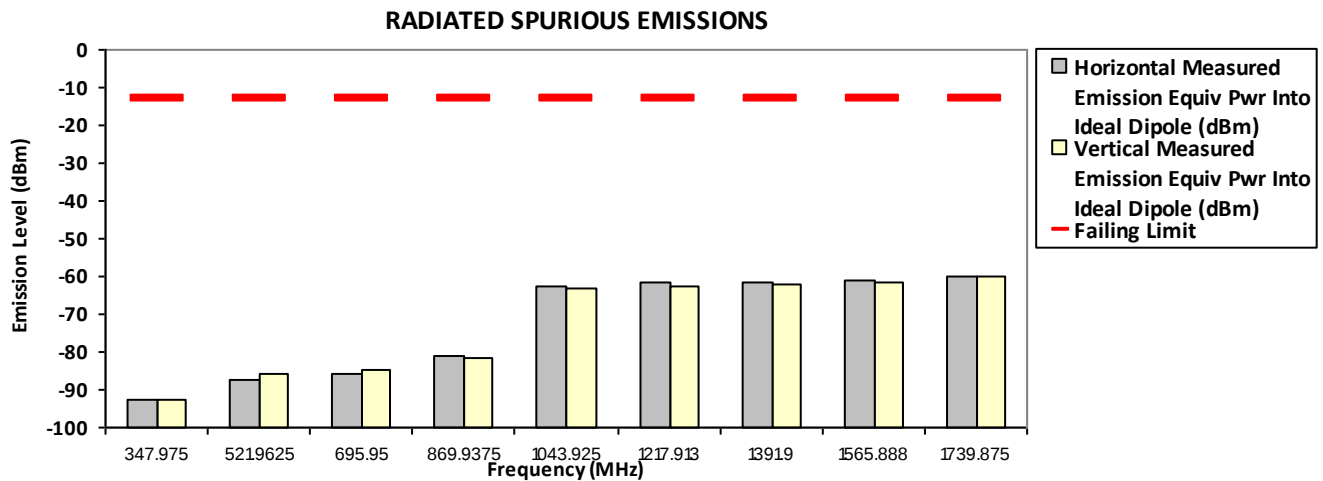

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif

Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks:

Passed Results

Marginal Results


Failed Results

6.10.3. Test Result (Digital)

Not for FCC review

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital C4FM
 138.012500 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-94.8988 **	-95.6073 **
414.0375	-20.0000	-90.0047 **	-90.4246 **
552.0500	-20.0000	-83.7539 **	-85.5772 **
690.0625	-20.0000	-84.4674 **	-85.3116 **
828.0750	-20.0000	-82.7456 **	-81.9850 **
966.0875	-20.0000	-79.2154 **	-81.9126 **
1104.1000	-20.0000	-62.8547 **	-62.8720 **
1242.1125	-20.0000	-62.2643 **	-61.6649 **
1380.1250	-20.0000	-60.4306 **	-61.7125 **

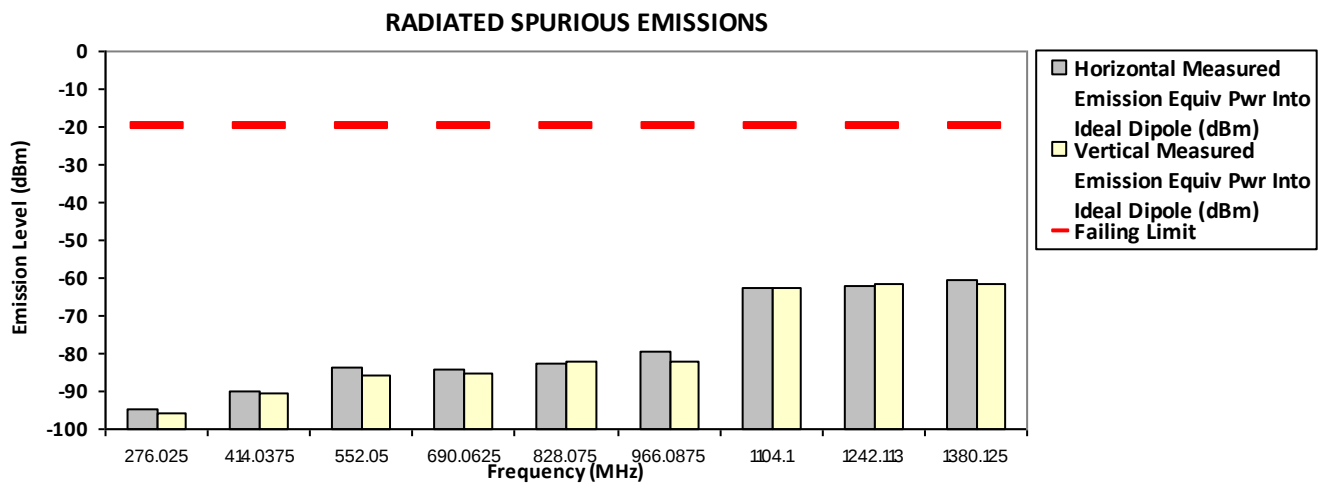

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital C4FM
 158.550000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-93.8618 **	-93.7693 **
475.6500	-20.0000	-87.1288 **	-87.9607 **
634.2000	-20.0000	-85.5189 **	-84.7040 **
792.7500	-20.0000	-83.1485 **	-82.9528 **
951.3000	-20.0000	-81.5460 **	-81.1005 **
1109.8500	-20.0000	-63.1163 **	-63.5331 **
1268.4000	-20.0000	-62.1291 **	-61.0983 **
1426.9500	-20.0000	-62.6542 **	-62.1062 **
1585.5000	-20.0000	-61.0393 **	-61.7413 **

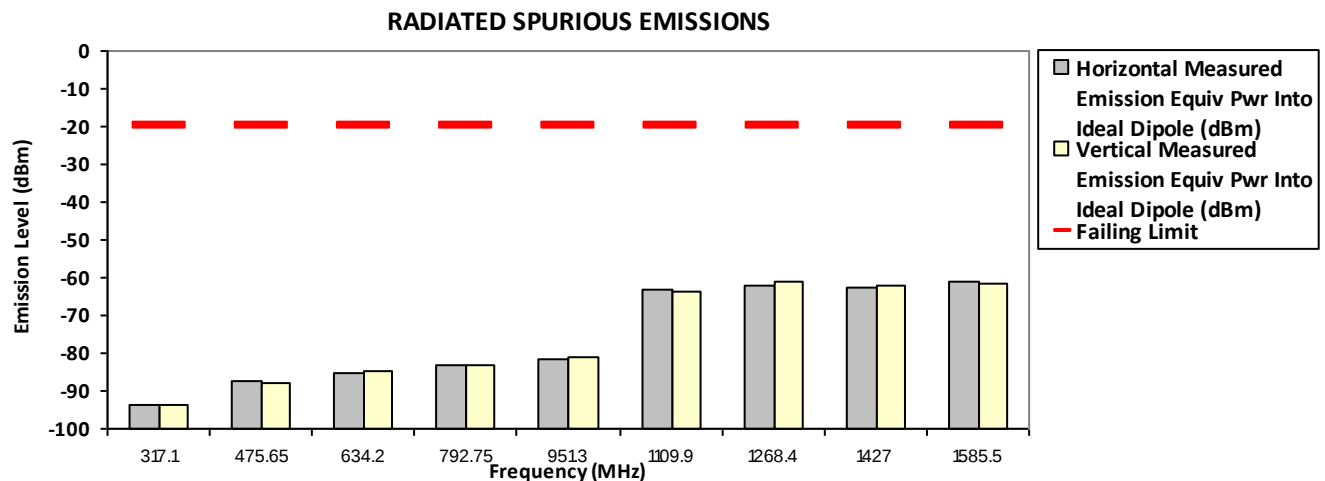

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
Battery Part No: PMNN4818A Accy Part No: NA
Test Mode: TX APCO Digital C4FM
158.550000 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-93.0093 **	-93.7233 **
475.6500	-20.0000	-88.0378 **	-86.4823 **
634.2000	-20.0000	-84.2942 **	-85.9688 **
792.7500	-20.0000	-82.9724 **	-82.6976 **
951.3000	-20.0000	-80.5057 **	-80.4181 **
1109.8500	-20.0000	-61.6539 **	-62.1488 **
1268.4000	-20.0000	-62.5283 **	-62.2992 **
1426.9500	-20.0000	-61.7466 **	-62.1776 **
1585.5000	-20.0000	-60.5749 **	-61.8250 **

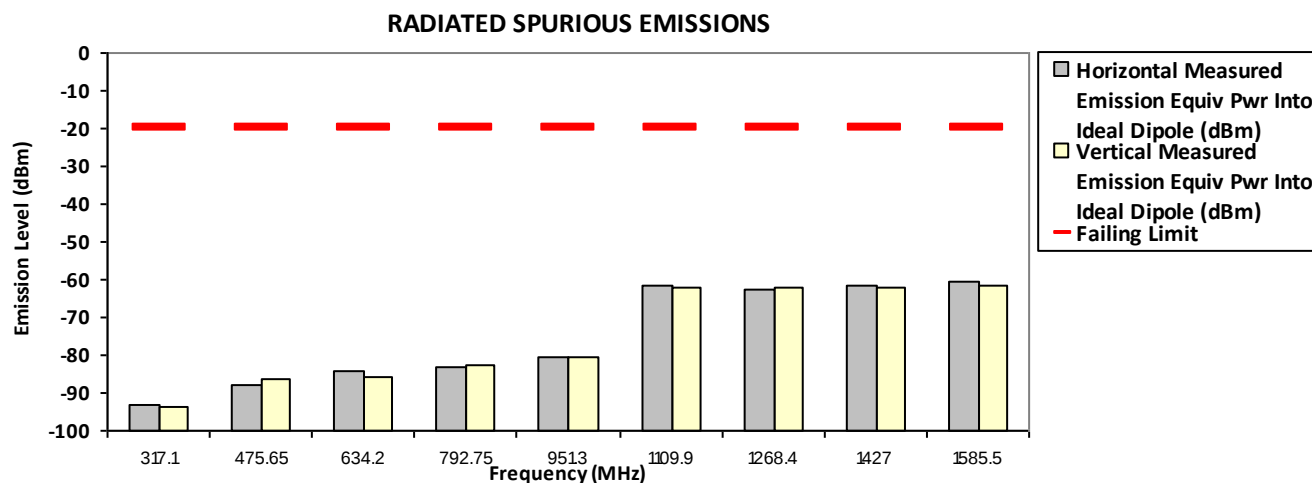

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:


Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041

Battery Part No: PMNN4818A Accy Part No: NA

Test Mode: TX APCO Digital C4FM

161.700000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-93.6867 **	-93.2928 **
485.1000	-20.0000	-88.1558 **	-87.6043 **
646.8000	-20.0000	-83.7805 **	-85.0080 **
808.5000	-20.0000	-83.2391 **	-82.9469 **
970.2000	-20.0000	-81.6236 **	-80.6501 **
1131.9000	-20.0000	-62.9671 **	-62.6634 **
1293.6000	-20.0000	-62.3954 **	-61.4531 **
1455.3000	-20.0000	-62.5596 **	-61.4793 **
1617.0000	-20.0000	-59.9484 **	-60.7301 **

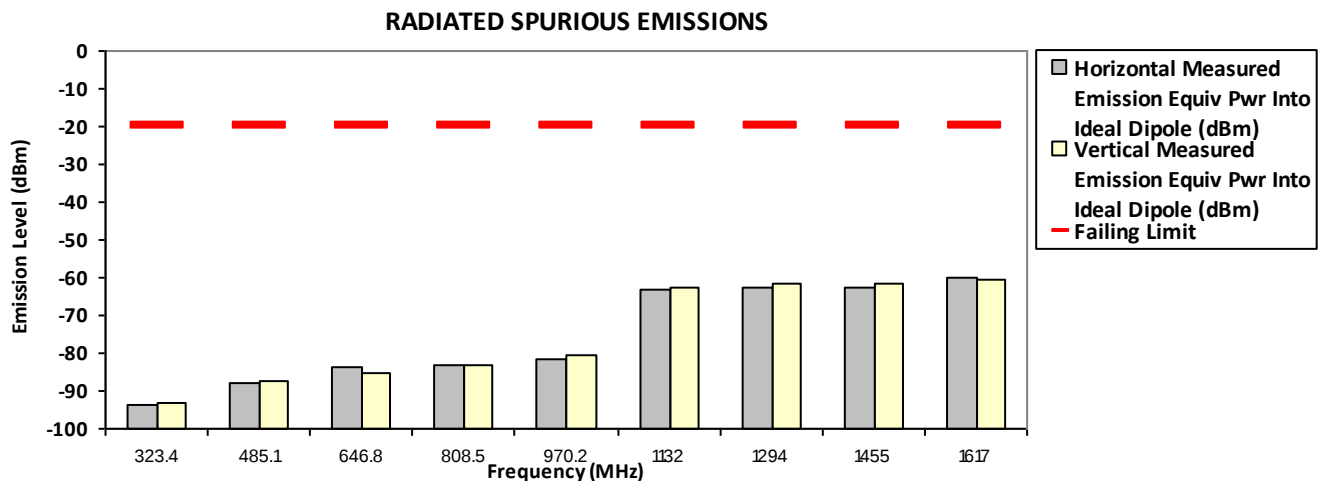

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:


Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041

Battery Part No: PMNN4818A Accy Part No: NA

Test Mode: TX APCO Digital C4FM

161.700000 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-92.6172 **	-93.0293 **
485.1000	-20.0000	-88.0577 **	-87.3862 **
646.8000	-20.0000	-84.9445 **	-85.3918 **
808.5000	-20.0000	-83.1142 **	-83.0515 **
970.2000	-20.0000	-79.8817 **	-81.9819 **
1131.9000	-20.0000	-63.4190 **	-62.2853 **
1293.6000	-20.0000	-61.7094 **	-63.0847 **
1455.3000	-20.0000	-61.6568 **	-62.4238 **
1617.0000	-20.0000	-61.2235 **	-60.2616 **

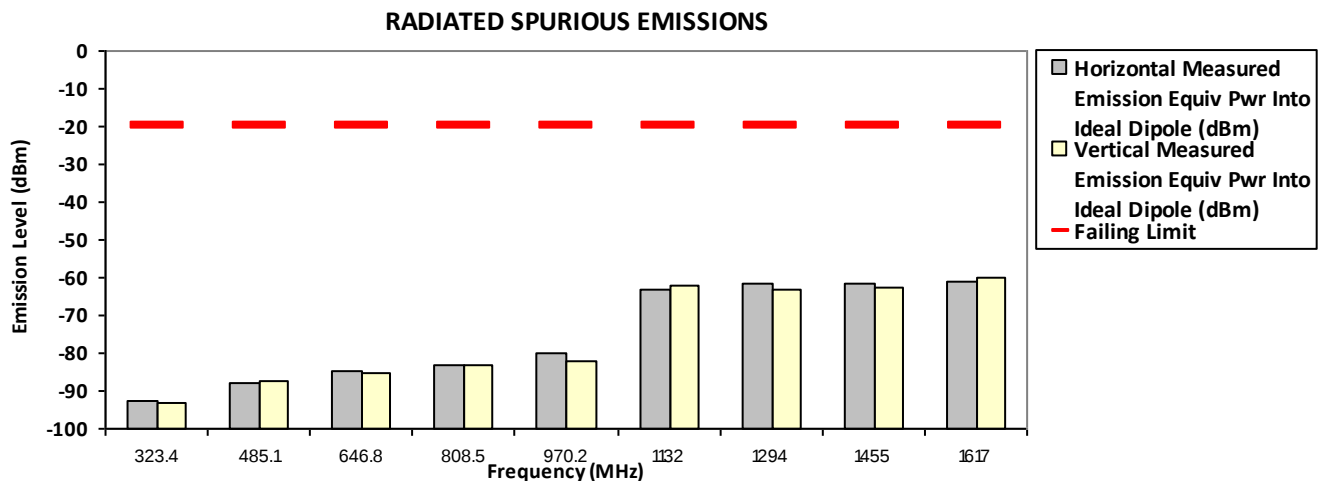

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital C4FM
 173.387500 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-92.4475 **	-91.4689 **
520.1625	-20.0000	-87.4929 **	-85.6674 **
693.5500	-20.0000	-84.8817 **	-84.4859 **
866.9375	-20.0000	-81.4588 **	-81.3720 **
1040.3250	-20.0000	-62.3209 **	-64.3151 **
1213.7125	-20.0000	-62.3699 **	-61.9379 **
1387.1000	-20.0000	-62.1980 **	-62.4772 **
1560.4875	-20.0000	-61.1906 **	-60.6381 **
1733.8750	-20.0000	-60.0613 **	-59.1517 **

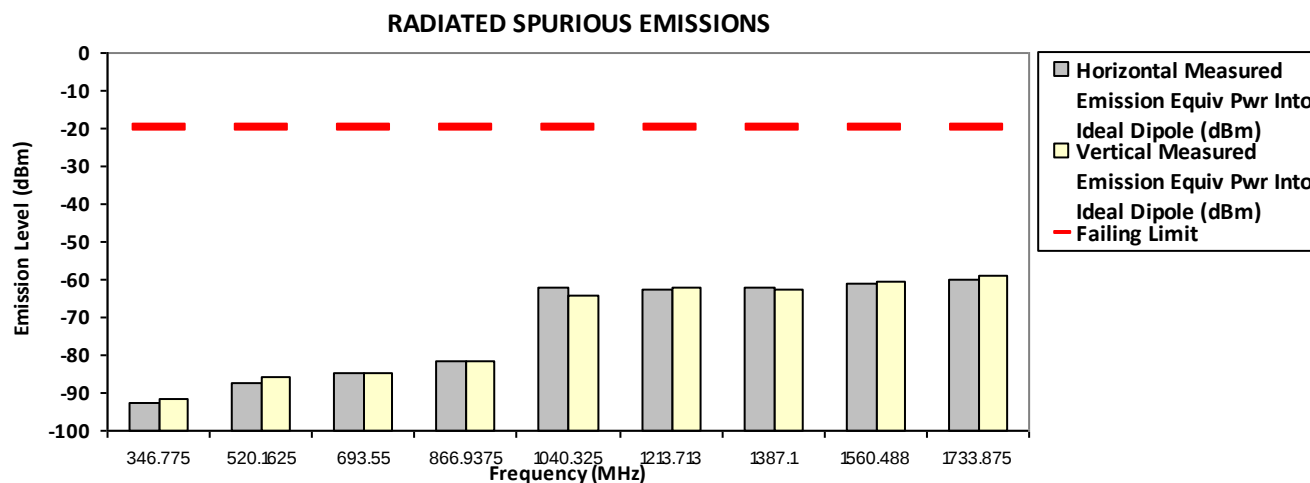

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Not for FCC review

SAC Transmitter Radiated Emission:
Model Number: H35KET9PW8AN-H **S/N:** 022TAF1508 **SR:**30468-EMC-00041
Battery Part No: PMNN4818A **Accy Part No:** NA
Test Mode: TX APCO Digital Phase II
138.012500 MHz **12.5 kHz** **6.600 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-94.8828 **	-94.4959 **
414.0375	-20.0000	-89.6878 **	-89.7524 **
552.0500	-20.0000	-84.9618 **	-85.3106 **
690.0625	-20.0000	-85.2791 **	-84.9984 **
828.0750	-20.0000	-82.6616 **	-82.6176 **
966.0875	-20.0000	-79.4960 **	-81.7125 **
1104.1000	-20.0000	-62.8823 **	-62.4167 **
1242.1125	-20.0000	-62.0304 **	-62.5713 **
1380.1250	-20.0000	-62.1436 **	-62.1965 **

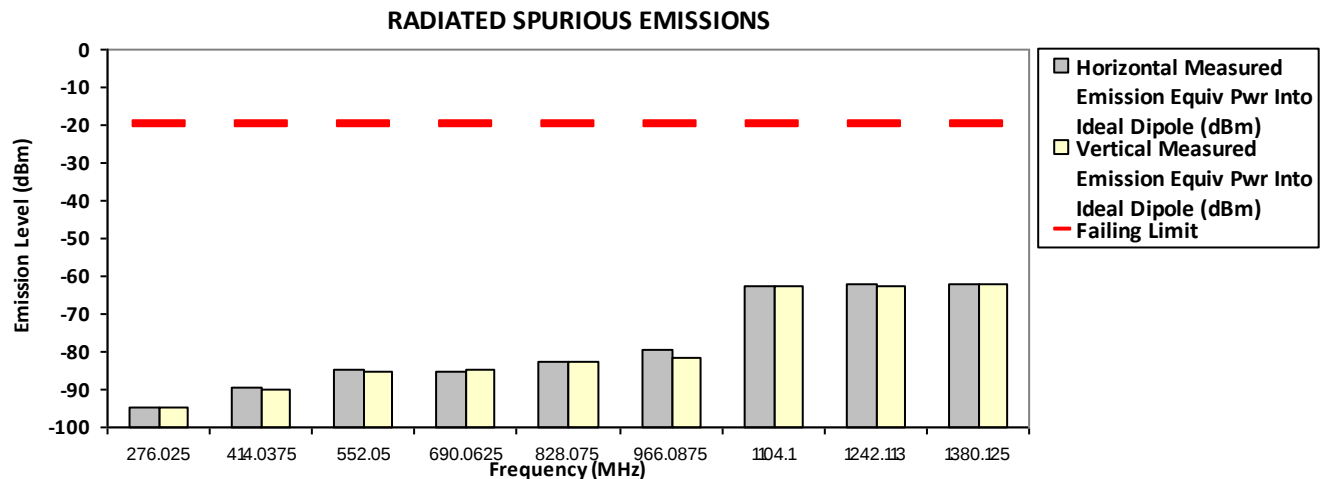

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital Phase II
 158.550000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-92.1753 **	-92.7219 **
475.6500	-20.0000	-85.7204 **	-87.4678 **
634.2000	-20.0000	-85.6321 **	-84.7919 **
792.7500	-20.0000	-83.7370 **	-82.4656 **
951.3000	-20.0000	-81.3250 **	-81.1407 **
1109.8500	-20.0000	-62.4004 **	-63.3665 **
1268.4000	-20.0000	-62.8879 **	-62.9476 **
1426.9500	-20.0000	-62.1929 **	-61.3769 **
1585.5000	-20.0000	-61.1737 **	-60.5920 **

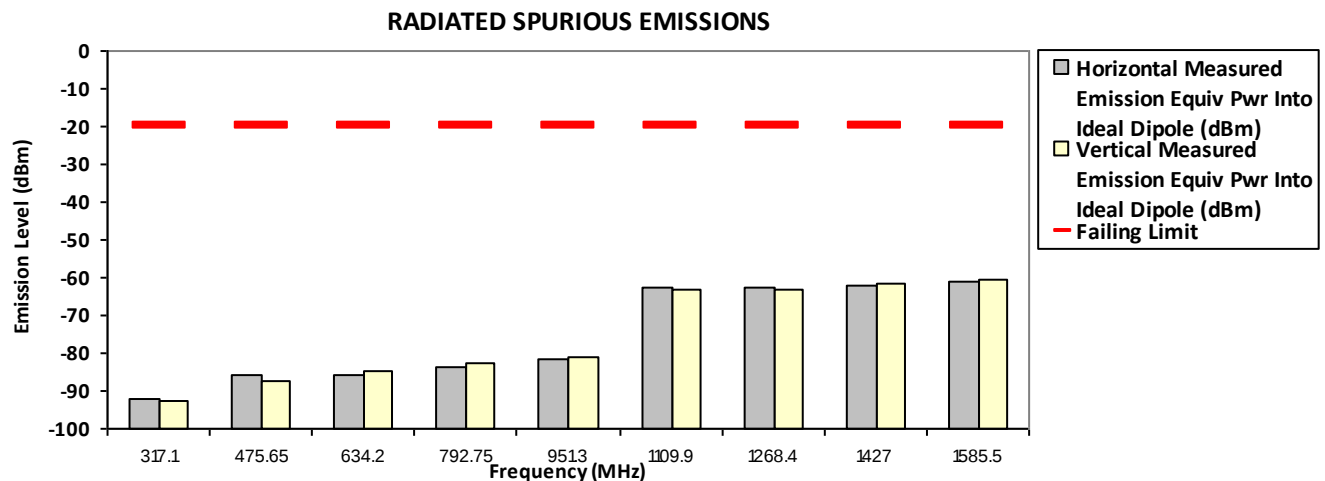

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital Phase II
 158.550000 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-91.5177 **	-93.2781 **
475.6500	-20.0000	-87.1823 **	-87.1196 **
634.2000	-20.0000	-85.3720 **	-85.2018 **
792.7500	-20.0000	-81.9599 **	-83.1390 **
951.3000	-20.0000	-80.8320 **	-80.6245 **
1109.8500	-20.0000	-62.5858 **	-62.9967 **
1268.4000	-20.0000	-62.2666 **	-62.1482 **
1426.9500	-20.0000	-60.4595 **	-61.8421 **
1585.5000	-20.0000	-60.1675 **	-61.4841 **

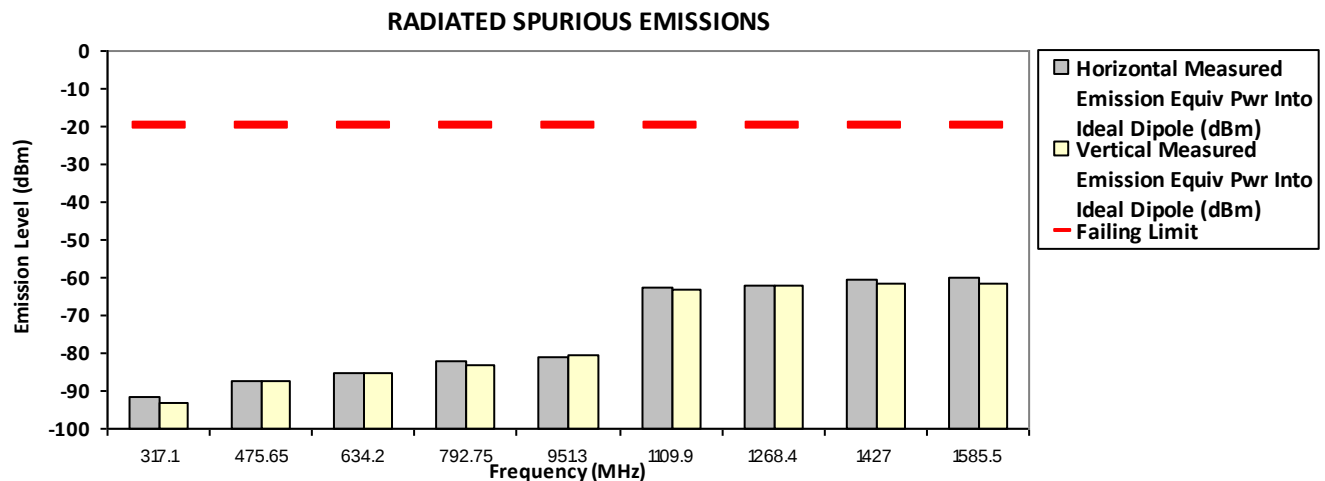

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4


System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital Phase II
 161.700000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-93.3924 **	-93.2192 **
485.1000	-20.0000	-87.8399 **	-87.0472 **
646.8000	-20.0000	-84.5976 **	-84.2066 **
808.5000	-20.0000	-82.4548 **	-82.4903 **
970.2000	-20.0000	-82.0821 **	-81.2493 **
1131.9000	-20.0000	-62.8158 **	-63.3372 **
1293.6000	-20.0000	-62.4413 **	-62.1423 **
1455.3000	-20.0000	-62.0555 **	-62.3275 **
1617.0000	-20.0000	-60.9840 **	-60.1972 **

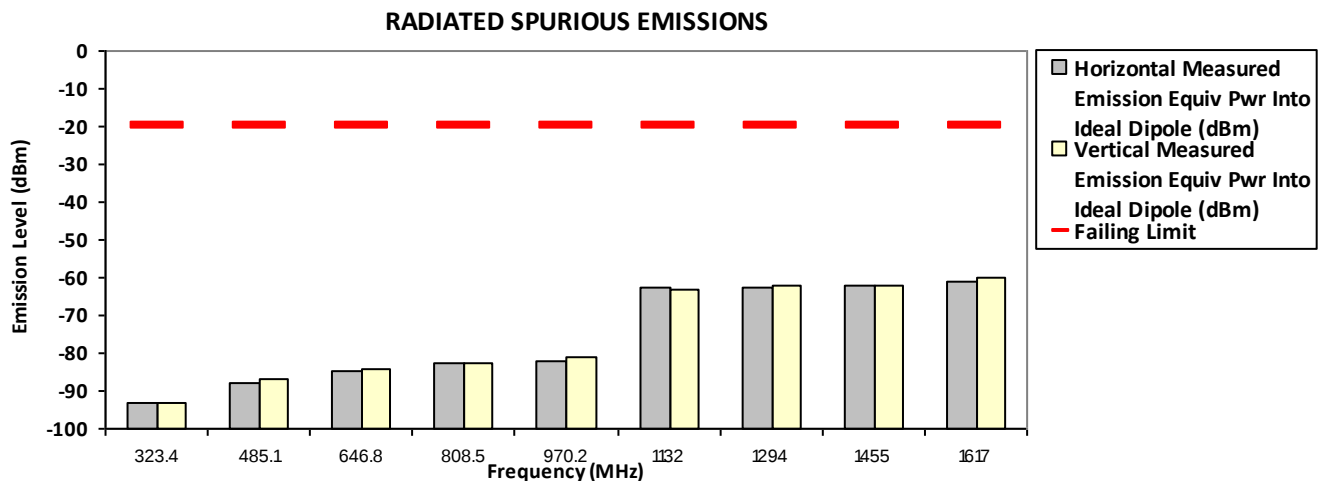

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital Phase II
 161.700000 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-94.0516 **	-92.4340 **
485.1000	-20.0000	-87.4583 **	-87.1574 **
646.8000	-20.0000	-84.3818 **	-84.5597 **
808.5000	-20.0000	-82.6344 **	-83.6595 **
970.2000	-20.0000	-82.0250 **	-80.8974 **
1131.9000	-20.0000	-63.2699 **	-63.2582 **
1293.6000	-20.0000	-61.7430 **	-62.0644 **
1455.3000	-20.0000	-62.0366 **	-61.9448 **
1617.0000	-20.0000	-60.9450 **	-60.8683 **

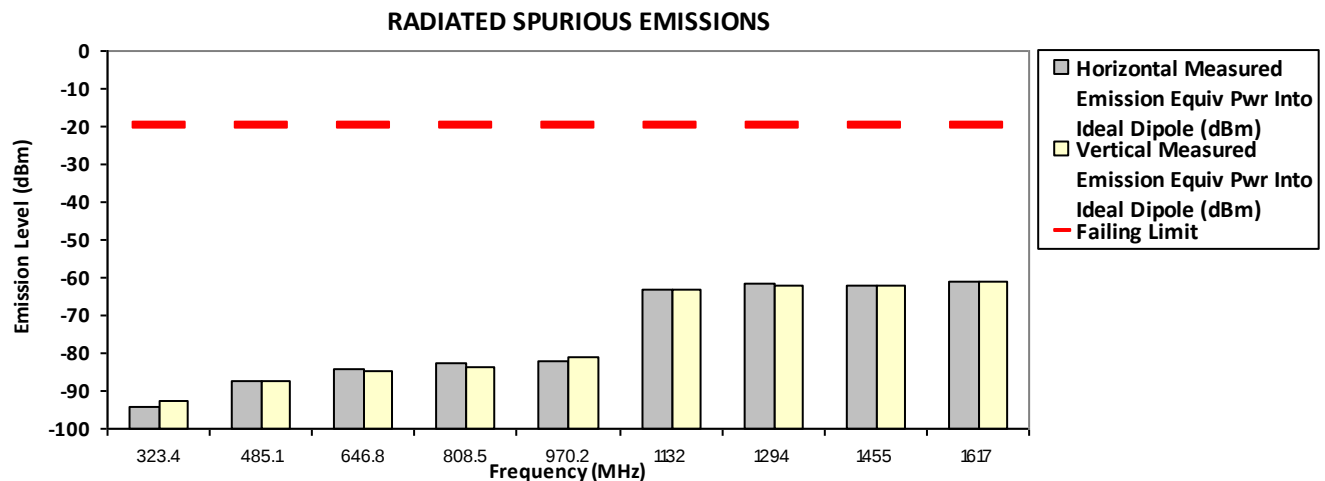

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
 Model Number: H35KET9PW8AN-H S/N: 022TAF1508 SR:30468-EMC-00041
 Battery Part No: PMNN4818A Accy Part No: NA
 Test Mode: TX APCO Digital Phase II
 173.387500 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-93.0965 **	-93.2084 **
520.1625	-20.0000	-87.8581 **	-87.2526 **
693.5500	-20.0000	-85.0709 **	-85.3462 **
866.9375	-20.0000	-81.9086 **	-81.5778 **
1040.3250	-20.0000	-62.3644 **	-63.4517 **
1213.7125	-20.0000	-62.6845 **	-62.8317 **
1387.1000	-20.0000	-61.6138 **	-61.6358 **
1560.4875	-20.0000	-61.6402 **	-60.2426 **
1733.8750	-20.0000	-60.5083 **	-59.5436 **

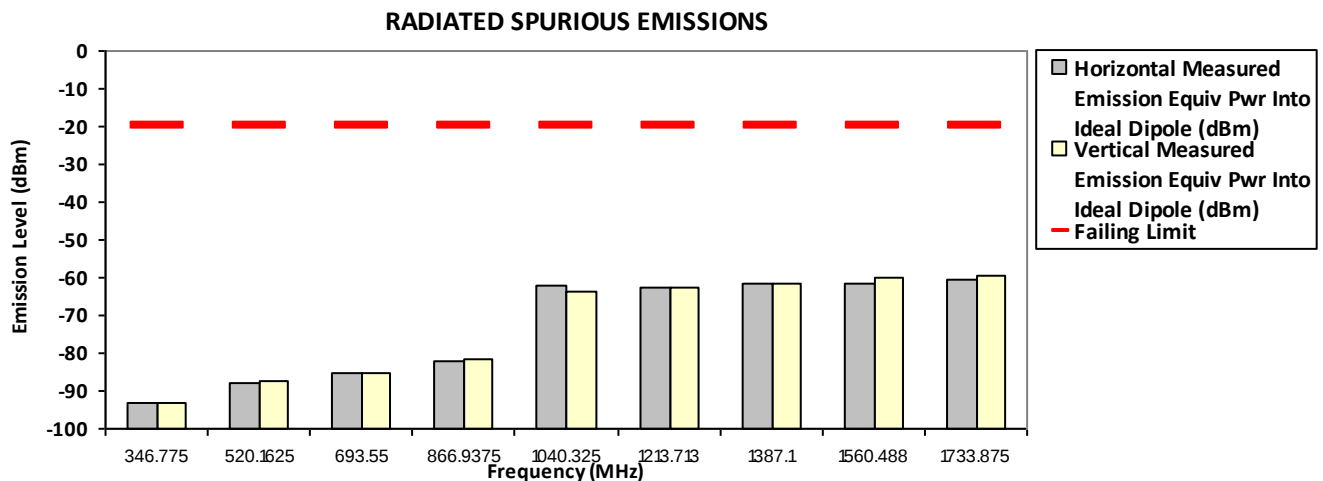

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Zarif Tue, 7 May, 2024

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.6 Hum(%RH): 69.4

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Effective Radiated Power (ERP)

6.11.1. Test Setup

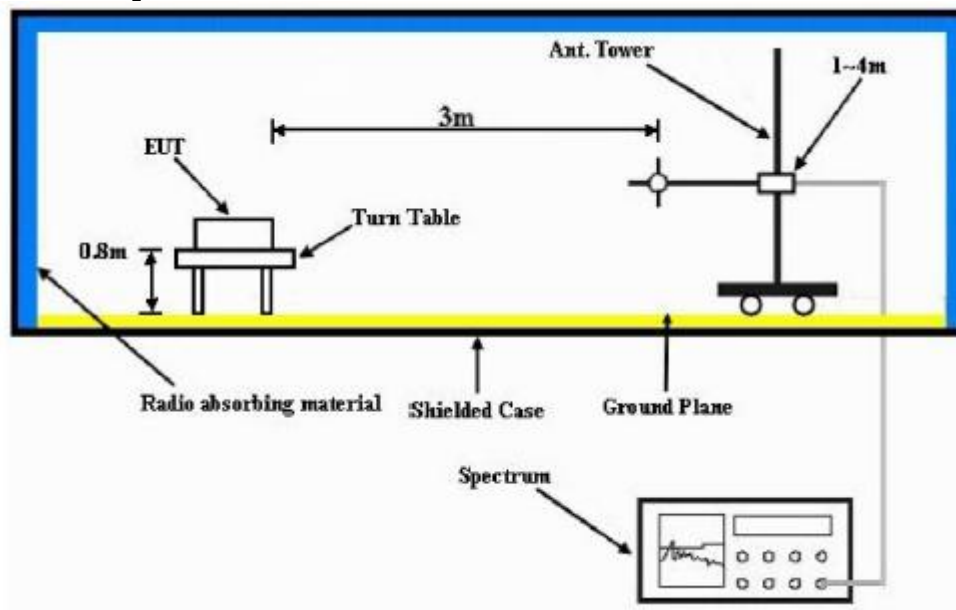

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


6.11.2. Test Result Not Applicable

6.11.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.12. GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

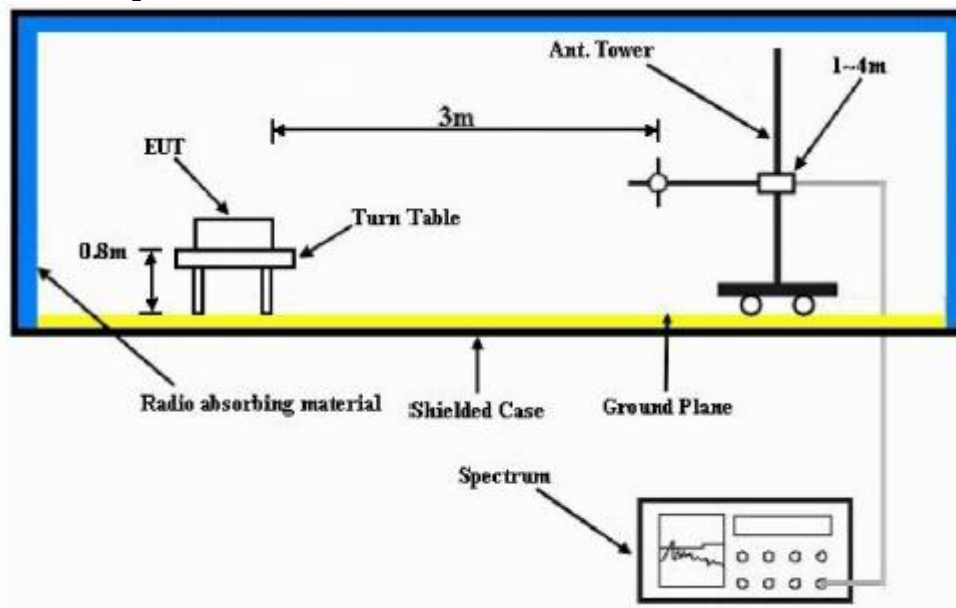

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.1. Test Result Not Applicable

6.12.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~