


	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.A																																
<table><tr><td>Date/s Tested</td><td>: 13-Jun-2022 - 6-Sep-2022</td></tr><tr><td>Report Issue Date</td><td>: 26-Sep-2022</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: TAI, WEN QI</td></tr><tr><td>Product Type</td><td>: Mobile</td></tr><tr><td>Product Version (PMN)</td><td>: XPR5550e</td></tr><tr><td>Model Number (HVIN)</td><td>: AAM28TRN9RA1AN (IC Model: PMUE4140CBMNAA)</td></tr><tr><td>Frequency Band</td><td>: 450-527MHz</td></tr><tr><td>Max RF Output Power</td><td>: 48 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version (FVIN)</td><td>: R02.21.01.1002</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12</td><td>PASS</td></tr></table>		Date/s Tested	: 13-Jun-2022 - 6-Sep-2022	Report Issue Date	: 26-Sep-2022	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: TAI, WEN QI	Product Type	: Mobile	Product Version (PMN)	: XPR5550e	Model Number (HVIN)	: AAM28TRN9RA1AN (IC Model: PMUE4140CBMNAA)	Frequency Band	: 450-527MHz	Max RF Output Power	: 48 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version (FVIN)	: R02.21.01.1002	(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS
Date/s Tested	: 13-Jun-2022 - 6-Sep-2022																																
Report Issue Date	: 26-Sep-2022																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: TAI, WEN QI																																
Product Type	: Mobile																																
Product Version (PMN)	: XPR5550e																																
Model Number (HVIN)	: AAM28TRN9RA1AN (IC Model: PMUE4140CBMNAA)																																
Frequency Band	: 450-527MHz																																
Max RF Output Power	: 48 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version (FVIN)	: R02.21.01.1002																																
(LMR) FCC 47 CFR Part 22 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Putri Nur Sarah Sofia Test Personnel	Approved Signatory:  Soon Oi May Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup.....	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup.....	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	14
6.3. Modulation Characteristics	15
6.3.1. Test Setup.....	15
6.3.2. Test Result	16
6.3.3. Test Limit.....	19
6.4. Modulation Limiting.....	20
6.4.1. Test Setup.....	20
6.4.2. Test Result	21
6.4.3. Test Limit.....	23
6.5. Occupied Bandwidth.....	24
6.5.1. Test Setup (Analog)	24
6.5.2. Test Result (Analog).....	25
6.5.3. Test Setup (Digital).....	33
6.5.4. Test Result (Digital).....	34
6.5.5. Test Limit.....	42
6.6. Band Edge Conducted Spurious Emission (Part 22)	43
6.6.1. Test Setup (Analog)	43
6.6.2. Test Result (Analog).....	44
6.6.3. Test Setup (Digital).....	46
6.6.4. Test Result (Digital).....	47
6.6.5. Test Limit.....	48
6.7. Transient Frequency Behavior.....	49
6.7.1. Test Setup.....	49
6.7.2. Test Result	50
6.7.3. Test Limit.....	52
6.8. Adjacent Channel Power.....	53
6.8.1. Test Setup (Analog)	53
6.8.2. Test Result	53
6.8.3. Test Setup (Digital).....	54

6.8.4.	Test Result	54
6.8.5.	Test Limit.....	55
6.9.	Conducted Spurious Emission	57
6.9.1.	Test Setup.....	57
6.9.2.	Test Result (Analog)	58
6.9.3.	Test Result (Digital).....	70
6.9.4.	Test Limit.....	83
6.10.	Radiated Spurious Emission	84
6.10.1.	Test Setup.....	84
6.10.2.	Test Result (Analog)	85
6.10.3.	Test Result (Digital).....	97
6.10.4.	Test Limit.....	108
6.11.	Effective Radiated Power (ERP)	110
6.11.1.	Test Setup.....	110
6.11.2.	Test Result	111
6.11.3.	Test Limit.....	111
6.12.	GNSS (EIRP for 1559 - 1610MHz).....	112
6.12.1.	Test Setup.....	112
6.12.1.	Test Result	112
6.12.2.	Test Limit.....	112

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	21-JUN-2022	Putri

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, 4FSK

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 4-WAY NAVIGATION KEYPAD MICROPHONE WITH ENHANCED AUDIO	MOTOROLA	RMN5127C
POWER CABLE TO BATTERY, 20-FOOT (6-METRE) CABLE, 20 AMP (1 - 45 WATT)	MOTOROLA	HKN4192C

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046(a), 22.565(f), 74.461, 80.215	RSS-119	RF Power Output	Pass		511TYF9084
2.1055, 22.355, 74.464, 80.209	-	Frequency Stability	Pass		511TYF9084
2.1047, 74.463, 80.211, 90.210	RSS-119	Audio Frequency Response	Pass		511TYF9084
2.1047, 74.463, 80.211, 90.210	RSS-119	Audio Low Pass Filter Response	Pass		511TYF9084
2.1047, 74.463, 80.213, 90.210	RSS-119	Modulation limiting	Pass		511TYF9084
2.1049, 22.359, 90.210, 74.462, 80.211	RSS-119	Occupied Bandwidth	Pass	16K0F3E – 15.0087kHz 11K0F3E – 9.8678kHz 7K60F1D/FXD – 7.4864kHz 7K60F1E/FXE – 7.3193kHz 7K60F1W – 7.218kHz	511TYF9084
2.1051, 22.359 (a), (b)	RSS-119	Band Edge Conducted Spurious Emission	Pass		511TYF9084
90.214	-	Transient Frequency Behavior	Pass		511TYF9084
-	-	Adjacent Channel Power	NA		
2.1051, 22.359, 90.210 74.462(c), 80.211(c)	RSS-119	Conducted Spurious Emissions	Pass	Worst case: -32.38dBm	511TYF9084
2.1051, 22.359, 74.462(c), 80.211(c), 90.210	RSS-119	Radiated Spurious Emission	Pass	Worst case: -35.13dBm (margin: 15.13dB)	511TYH6803
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
80.211(c)	-	Effective Radiated Power (ERP)	Pass		511TYH6803

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: FCC_Analog_v2.5.0)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	21-Mar-22	21-Mar-23
POWER SENSOR	E4412A	MY41502652	09-Sep-21	09-Sep-22
POWER SUPPLY	6031A	3018A01915	29-Sep-21	29-Sep-22
POWER METER	E4416A	MY45101705	04-Mar-22	04-Mar-23
MODULATION ANALYZER	8901B	3403A04974	06-Sep-21	06-Sep-22
AUDIO ANALYZER	U8903B	MY61340003	21-Mar-22	21-Mar-23
CXA SIGNAL ANALYZER	N9000B	MY60250694	14-Dec-21	14-Dec-22
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.4)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER SENSOR	E9301B	MY41495393	09-Jun-22	09-Jun-23
SIGNAL GENERATOR	8657A	3315U04973	03-Sep-21	03-Sep-22
AUDIO ANALYZER	8903B	3011A10318	01-Nov-21	01-Nov-22
POWER METER	E4416A	GB41293240	14-Mar-22	14-Mar-23
STEP ATTENUATOR	8494G	MY42145194	12-Sep-21	12-Sep-22
POWER SUPPLY	6033A	3232A08203	03-Jun-22	03-Jun-23
ANALYZER SPECTRUM	E4445A	MY45301089	11-Oct-21	11-Oct-22
ATTENUATOR/110DB	8496G	MY42143970	12-Sep-21	12-Sep-22
AUDIO ANALYZER	8903B	3413A14586	13-Sep-21	13-Sep-22
ANALYZER MODULATION	8901B	2619A00845	30-Sep-21	30-Sep-22
AUDIO ANALYZER	8903B	3011A12488	13-Sep-21	13-Sep-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY48250517	21-Dec-21	21-Dec-22
POWER SUPPLY	6033A	3506A08076	10-Jan-22	10-Jan-23
INTERFACE BOX - FILTER	CNR	CS001	CNR	CNR
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	06-Apr-21	06-Apr-23
DRG HORN FREQ.	SAS-571	719	13-Sep-21	13-Sep-22
Advanced Power System - Dynamic DC Power Supply, 120V, 16.7A, 2000W	N7976A	MY53410110	30-Jun-22	30-Jun-23
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101751	24-Mar-22	24-Mar-23
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112B	2863	22-Jun-22	22-Jun-23
BILOG ANTENNA	CBL6112D	30991	05-Oct-21	05-Oct-22
DATA LOGGER THERMOHYGROMETER	SDL500	A.016785	23-Jun-22	23-Jun-23
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	18-Feb-22	18-Feb-23
PREAMPLIFIER 18-40GHz	BBV9721	9721-007	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00208416	8-Oct-21	8-Oct-22
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.4			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	450.025, 459.125, 467.775, 469.9875, 482.0125, 511.9875, 526.9875	Putri	23.4°C, 50%RH
Frequency Stability	Max	Analog	467.775	Putri	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	459.125, 467.775, 511.9875	Putri	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	459.125, 467.775, 511.9875	Putri	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	459.125, 467.775, 511.9875	Putri	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	Analog, 4FSK	450.025, 459.125, 467.775, 473.0125, 511.9875, 526.9875	Putri	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog, 4FSK	459.025, 459.65, 473.0125, 479.2875	Putri	23.4°C, 50%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog, 4FSK	467.775	Putri	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	Analog, 4FSK	NA		
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, 4FSK	450.025, 459.125, 467.775, 482.0125, 511.9875, 526.9875	Putri	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, 4FSK	450.025, 459.125, 467.775, 482.0125, 511.9875, 526.9875	Aiman & Nazrin	23.4°C, 70.6%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	NA		
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	467.775	Aiman & Nazrin	23.4°C, 70.6%RH

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

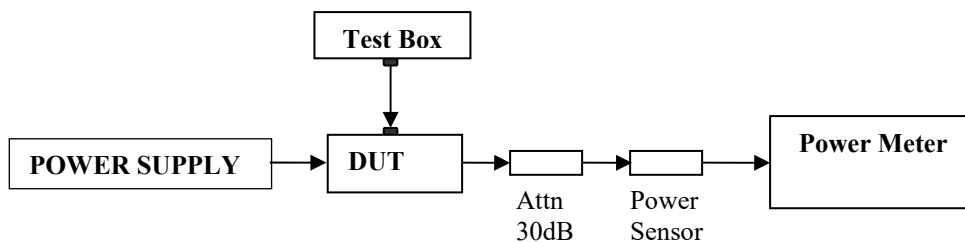


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
450.02500	1.04	1.99	46.70	8.40	Part 80 (2W)
459.12500	1.03	1.94	46.10	7.86	
467.77500	1.04	1.95	1.98	2.47	
469.98750	1.04	1.93	46.50	8.10	
482.01250	1.03	2.00	46.20	8.65	
511.98750	1.04	2.06	48.00	9.02	
526.98750	1.03	2.02	47.90	9.01	Not for FCC review

6.2. Frequency Stability

6.2.1. Test Setup

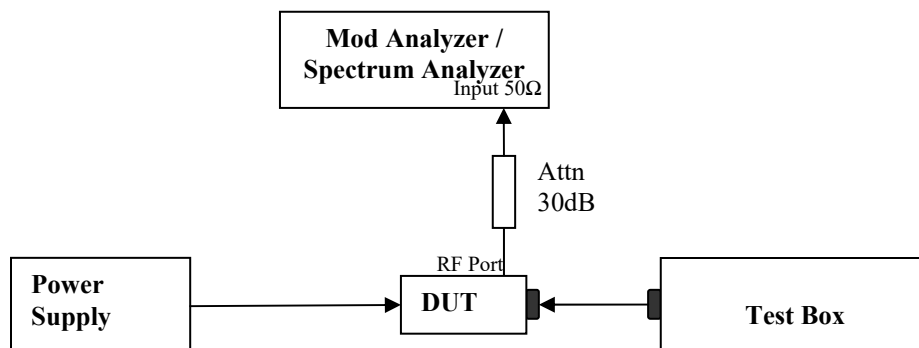


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

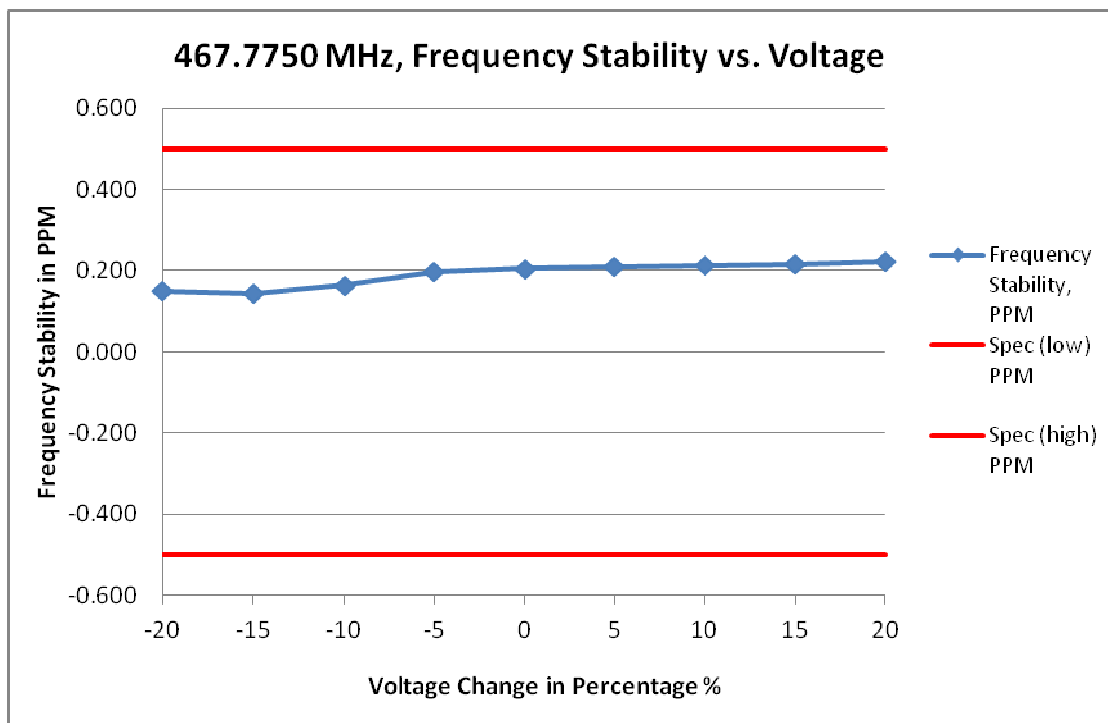

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	467.775070	0.149	-0.500	0.500
-15	11.560	467.775067	0.143	-0.500	0.500
-10	12.240	467.775077	0.165	-0.500	0.500
-5	12.920	467.775092	0.197	-0.500	0.500
0	13.600	467.775096	0.205	-0.500	0.500
5	14.280	467.775098	0.209	-0.500	0.500
10	14.960	467.775099	0.212	-0.500	0.500
15	15.640	467.775101	0.216	-0.500	0.500
20	16.320	467.775104	0.223	-0.500	0.500

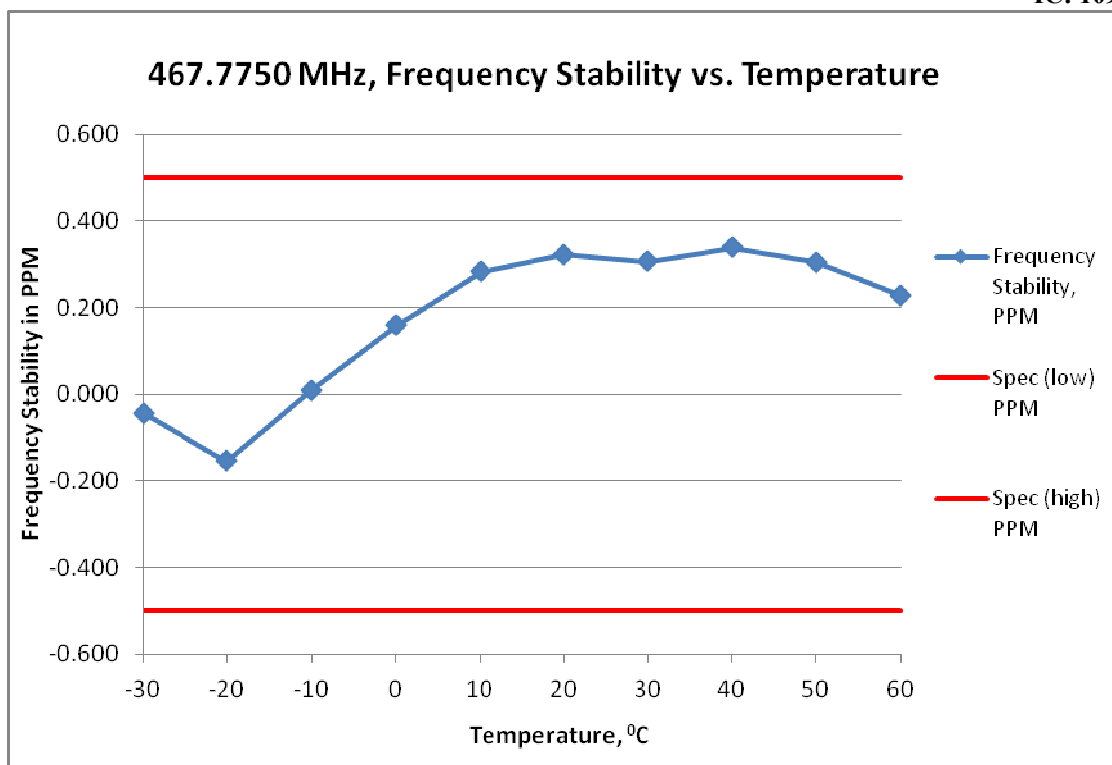

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.774980	-0.044	-0.500	0.500
-20	467.774928	-0.154	-0.500	0.500
-10	467.775004	0.009	-0.500	0.500
0	467.775074	0.159	-0.500	0.500
10	467.775132	0.283	-0.500	0.500
20	467.775151	0.322	-0.500	0.500
30	467.775143	0.306	-0.500	0.500
40	467.775159	0.339	-0.500	0.500
50	467.775142	0.304	-0.500	0.500
60	467.775107	0.228	-0.500	0.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 0.5ppm

6.3. Modulation Characteristics



6.3.1. Test Setup

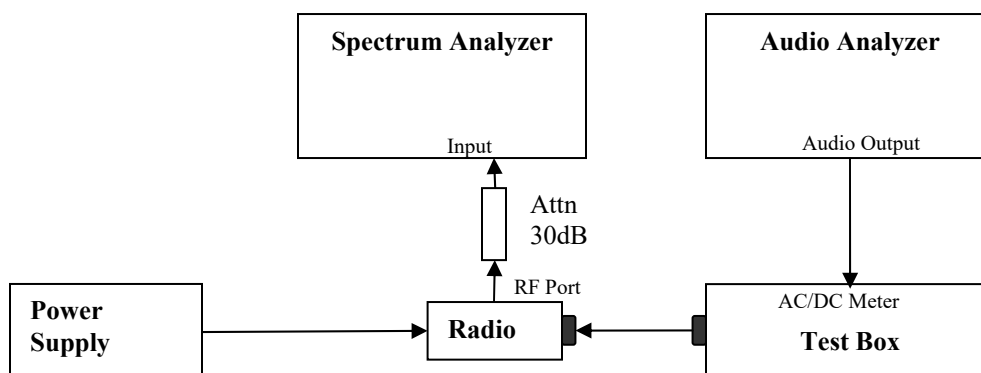



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as 0dB reference
- 6) Vary the audio frequency from 300 Hz to 20 kHz. Record the change in modulation in reference to step 5.



6.3.2. Test Result

Not for FCC review

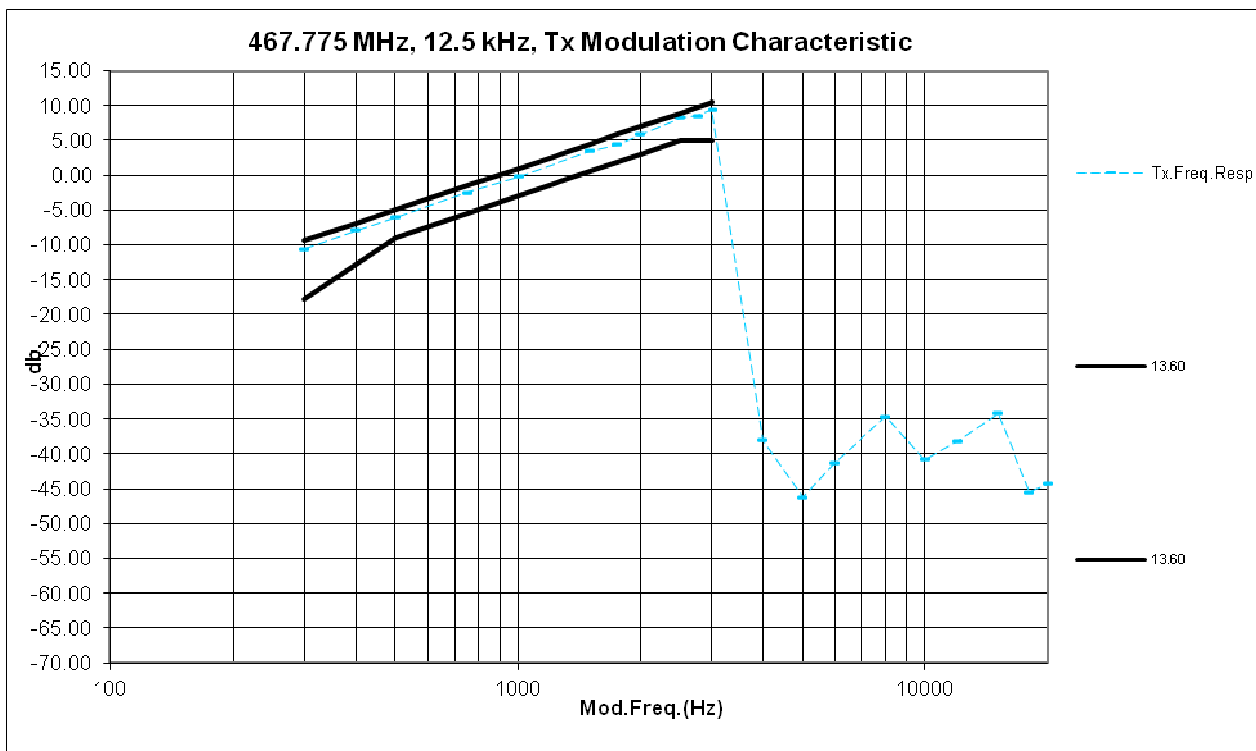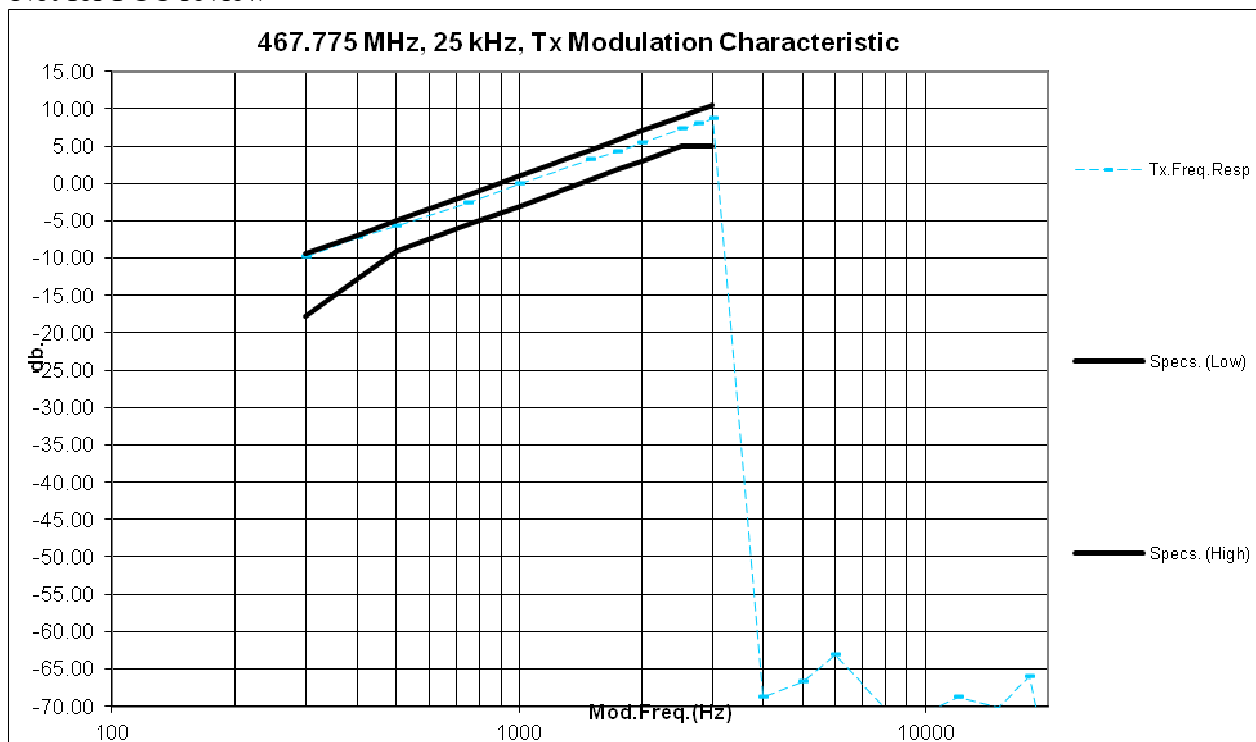


Not for FCC review

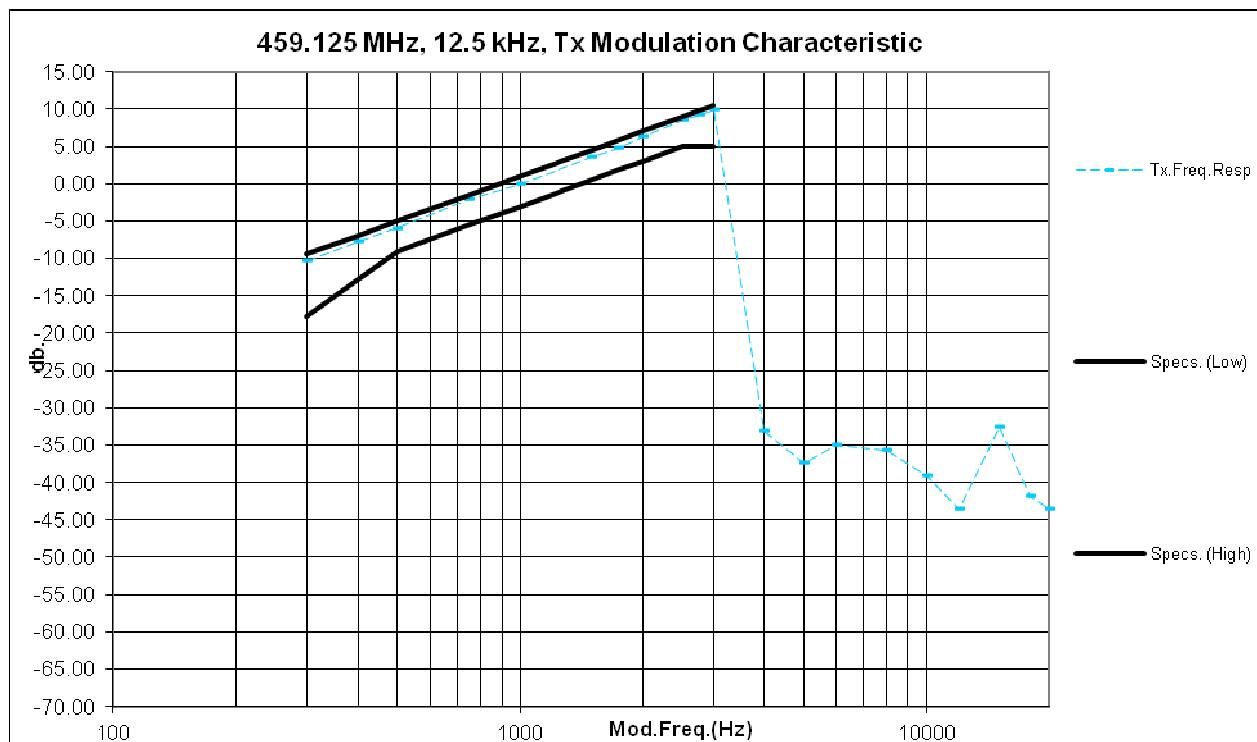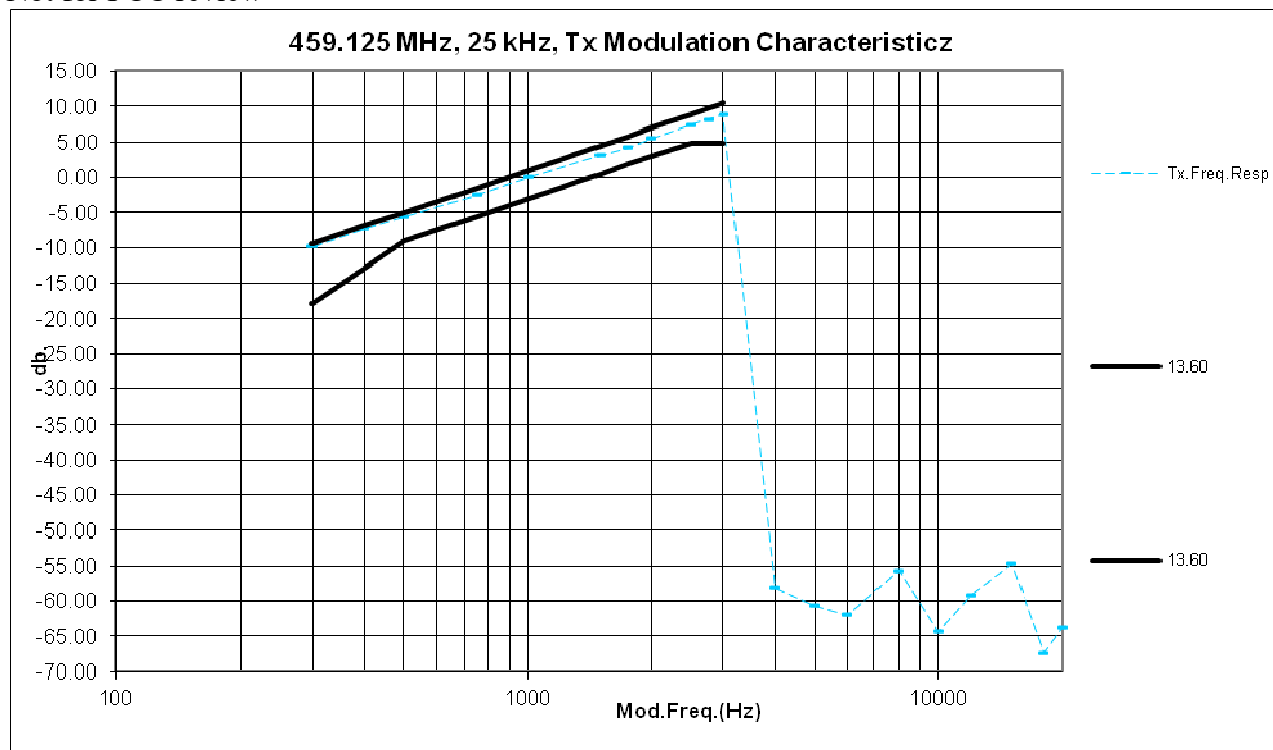

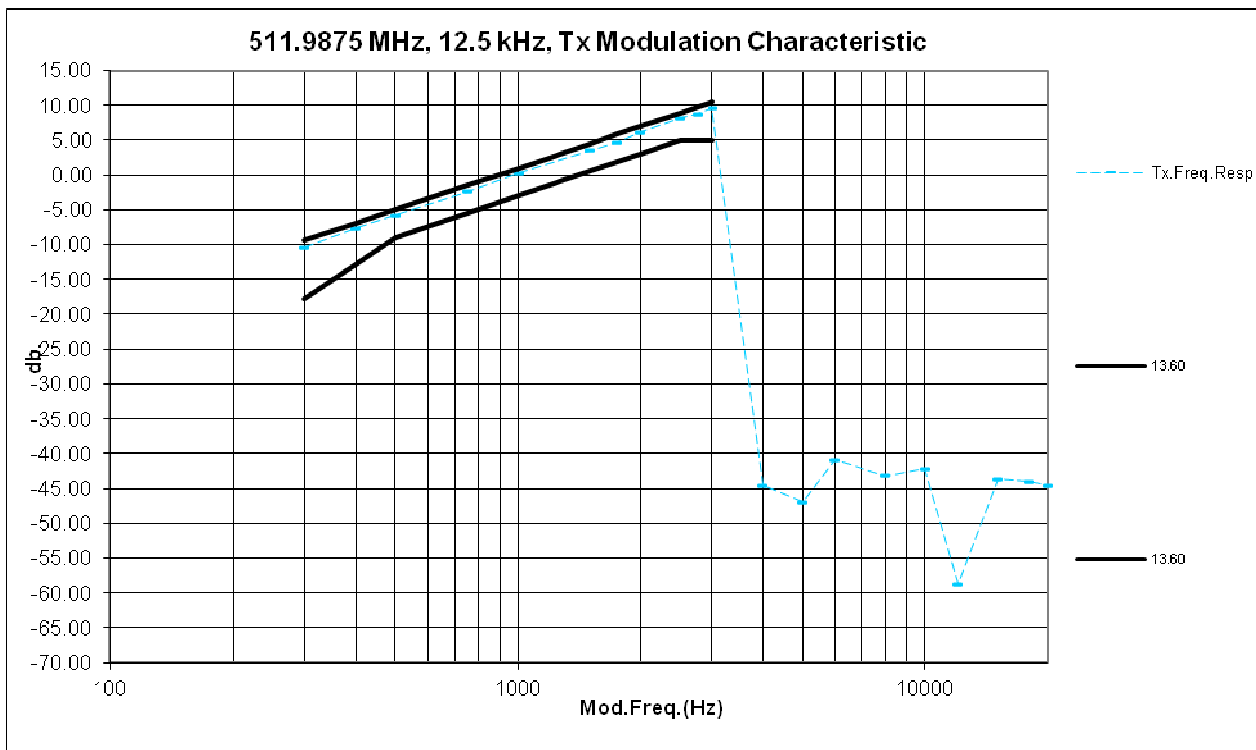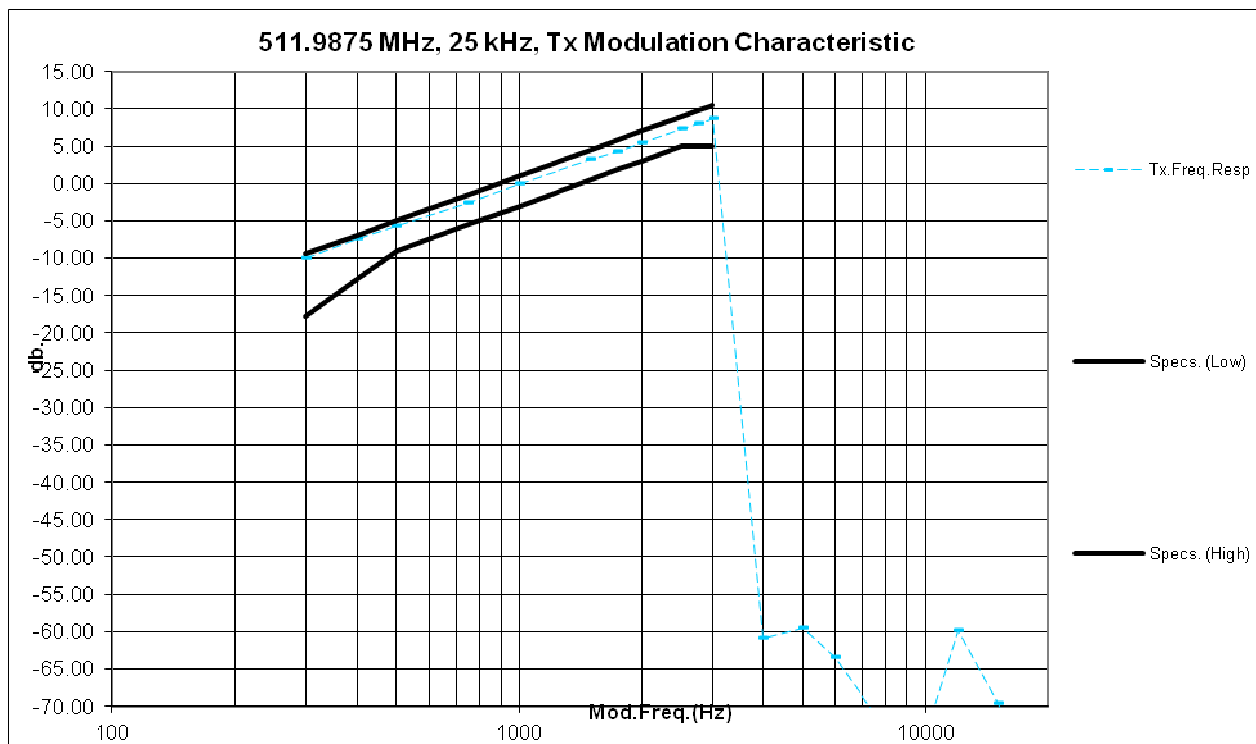

6.3.3. Test Limit

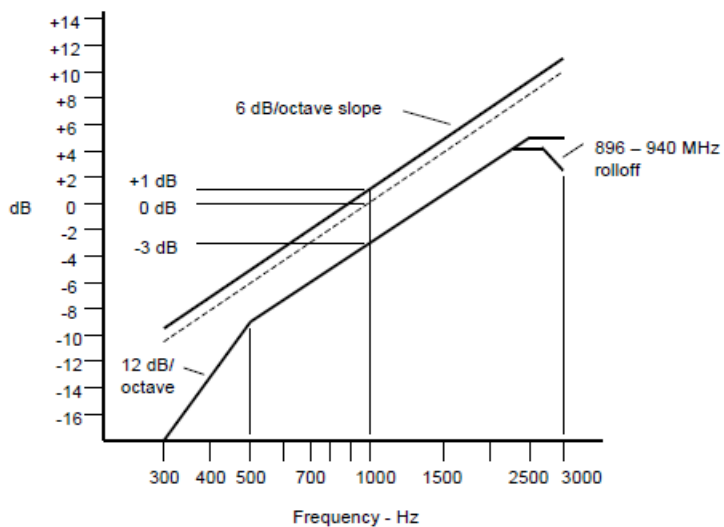


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Modulation Limiting



6.4.1. Test Setup

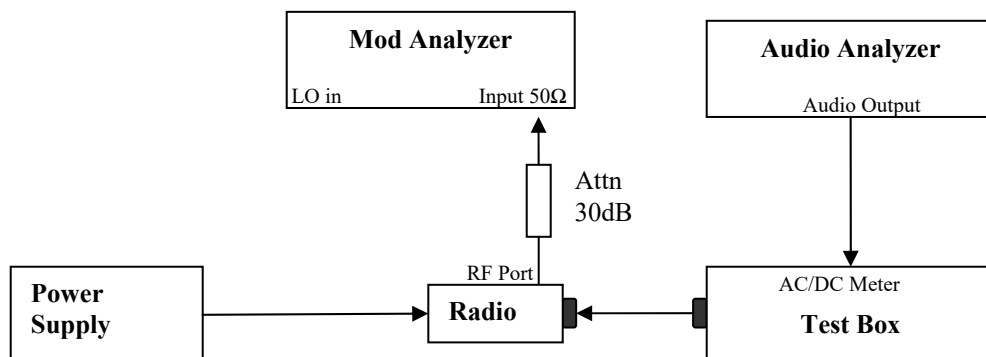



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.



6.4.2. Test Result

Not for FCC review

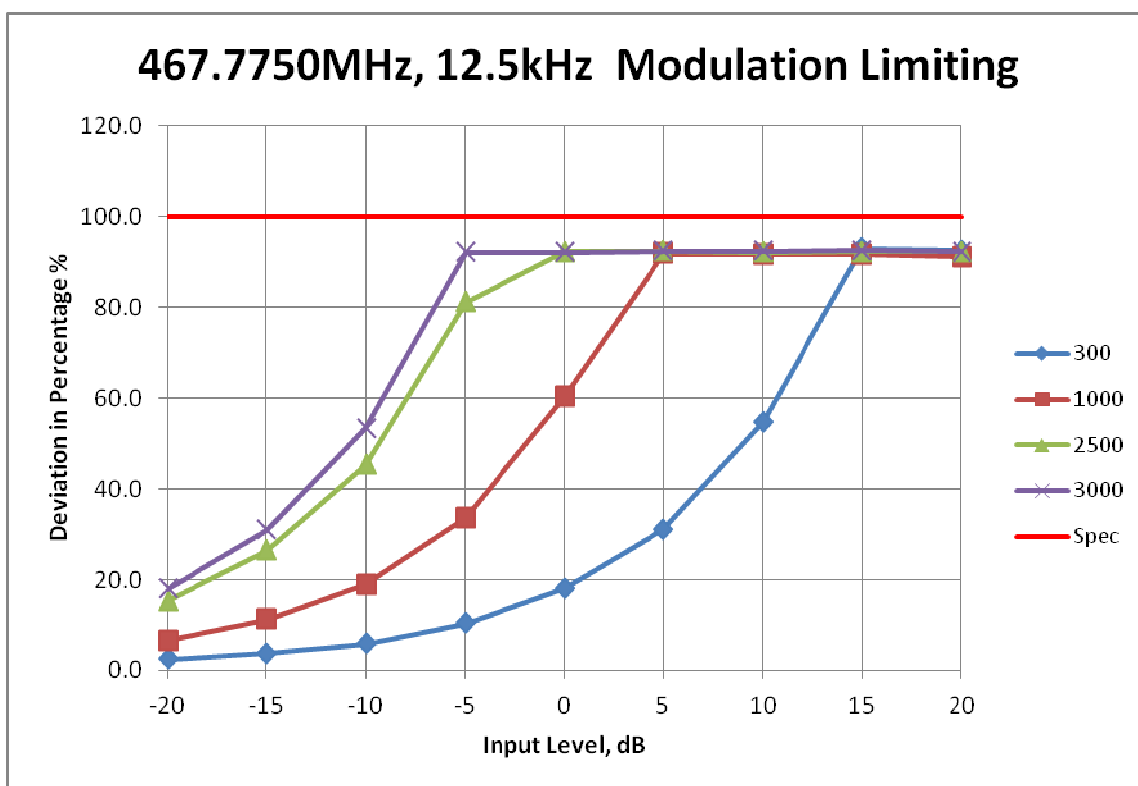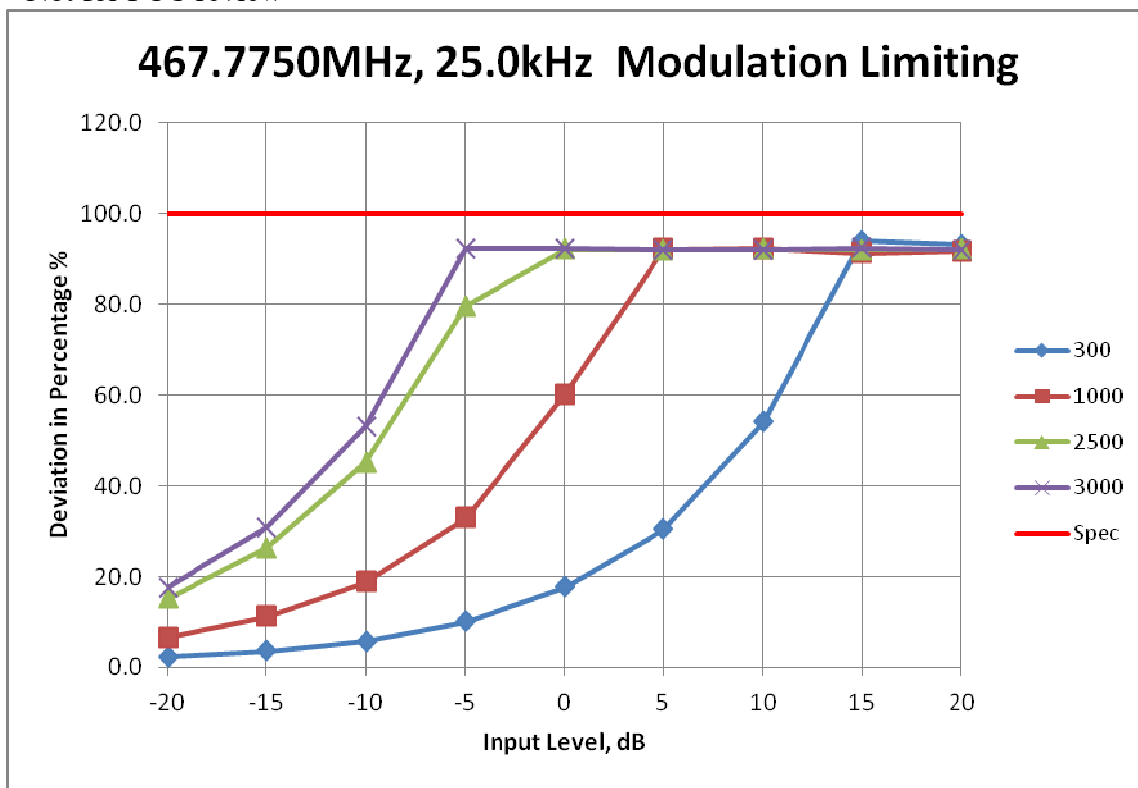

Not for FCC review

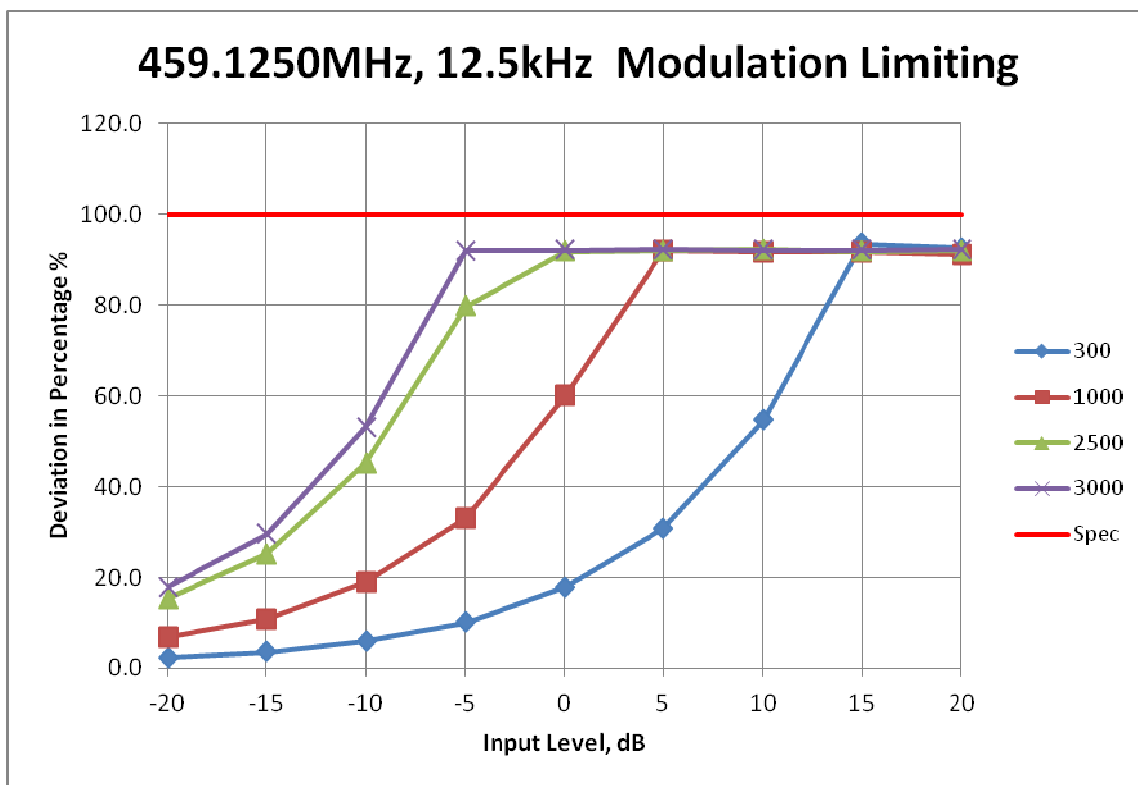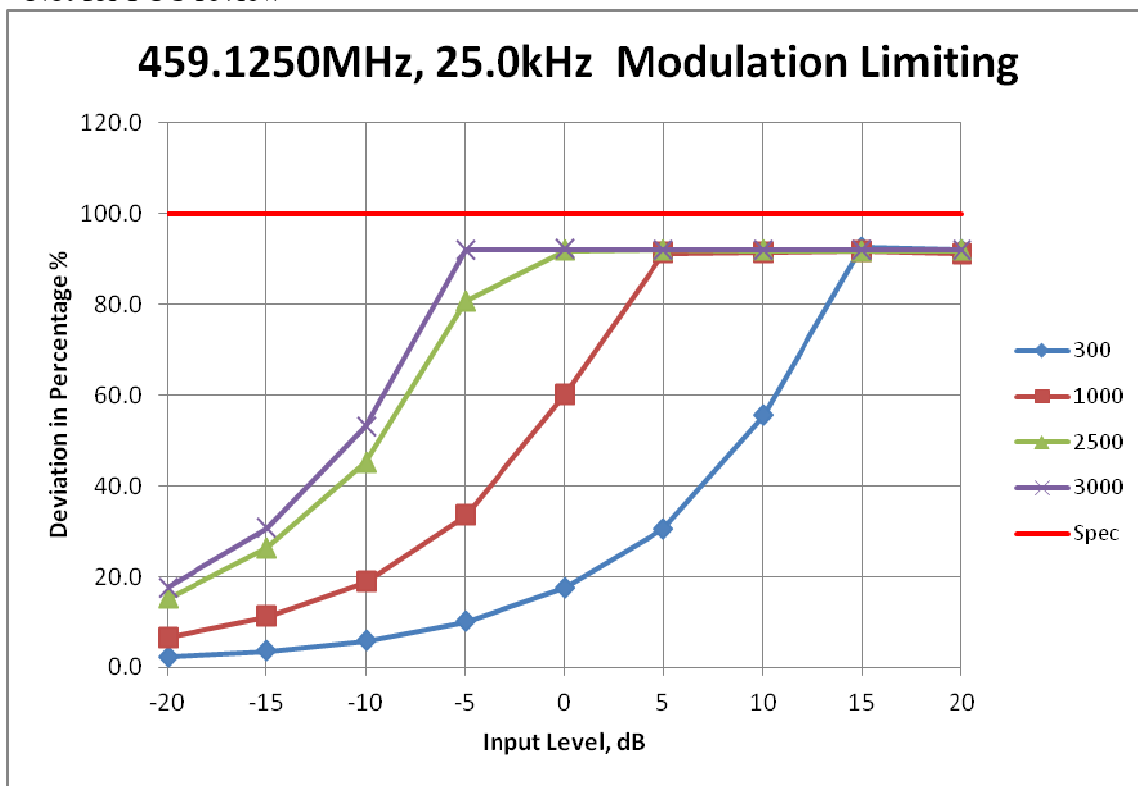


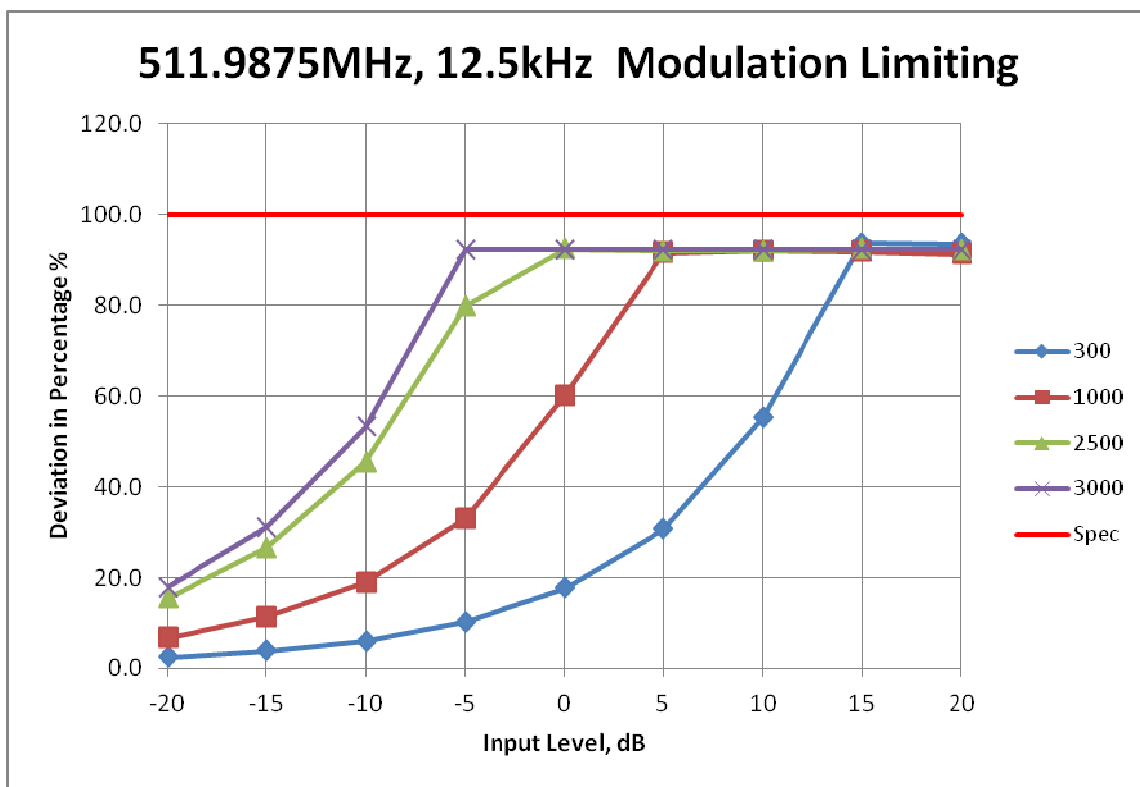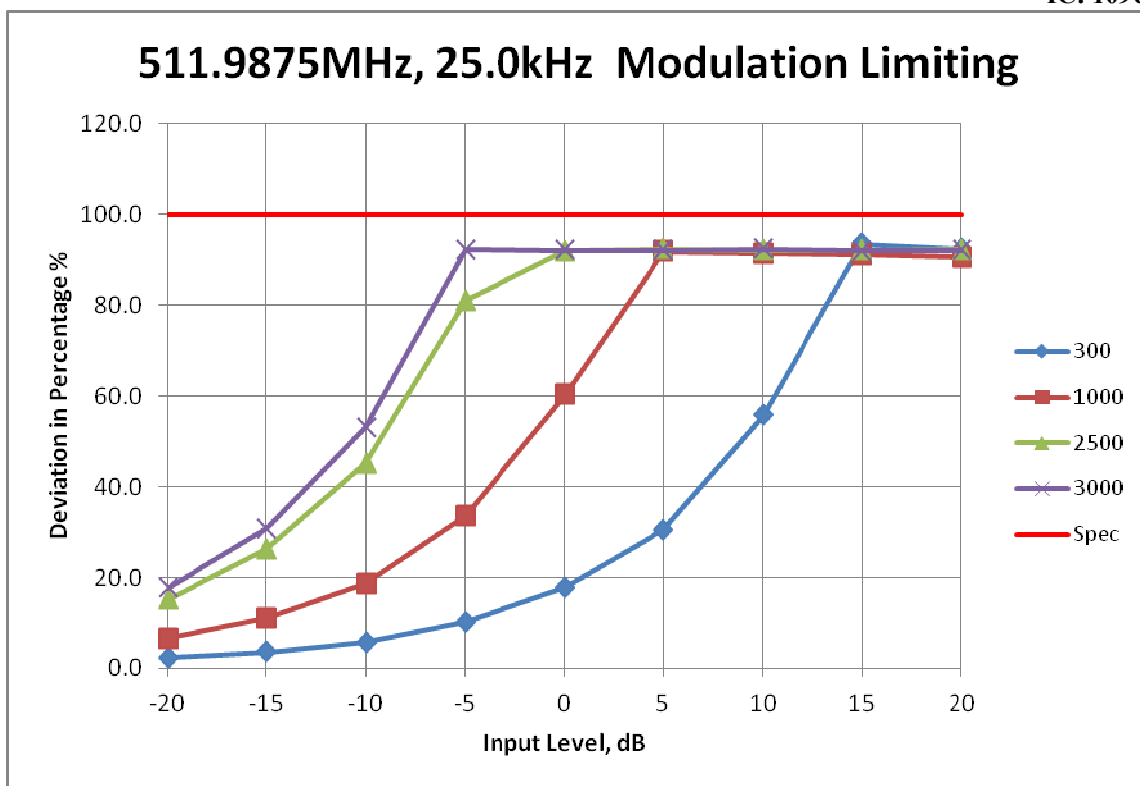

6.4.3. Test Limit
Modulation Limiting shall not exceed 100 percent.

6.5. Occupied Bandwidth

6.5.1. Test Setup (Analog)

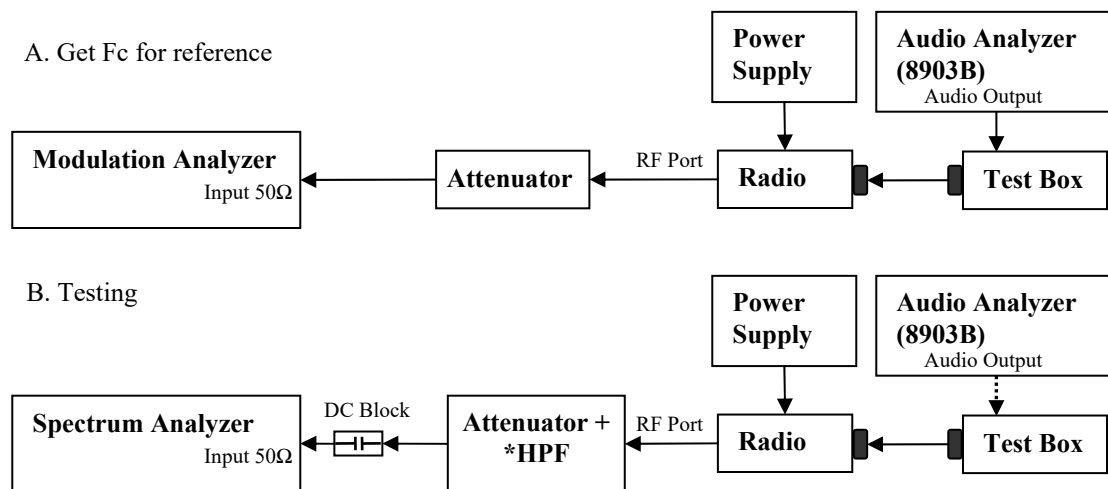

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.5.2. Test Result (Analog)

Standard Audio Modulation (25 kHz Channelization, Analog Voice):
Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} = 16K0$
F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E.


Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):
Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.


$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$
F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.



For Part 74

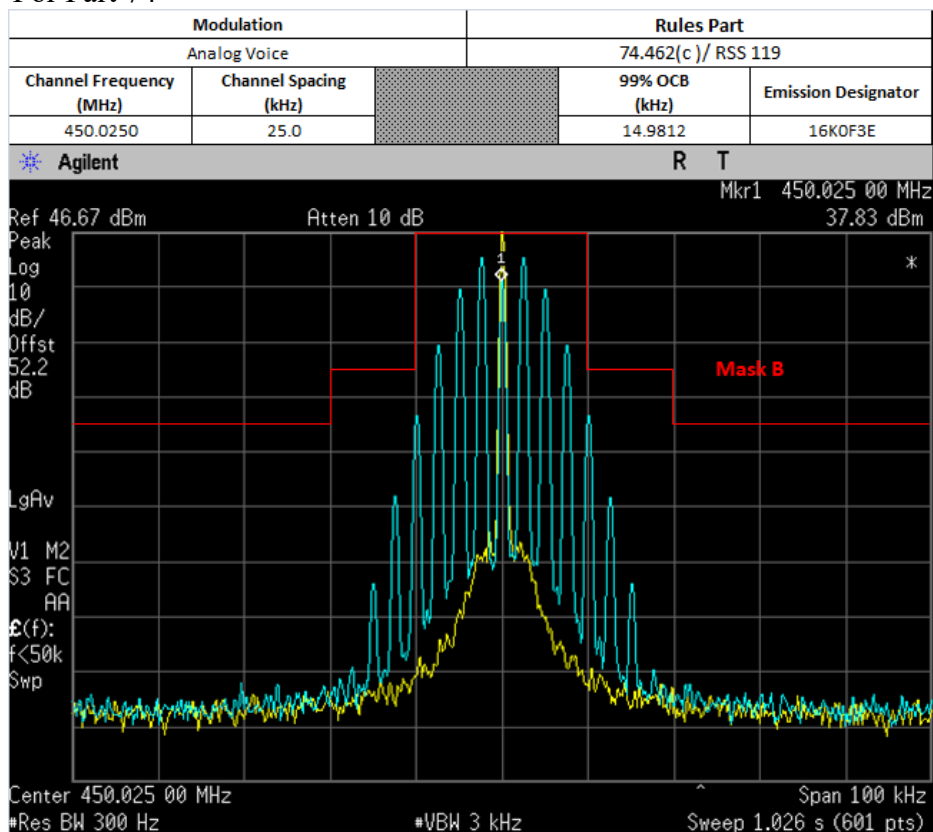




For Part 80


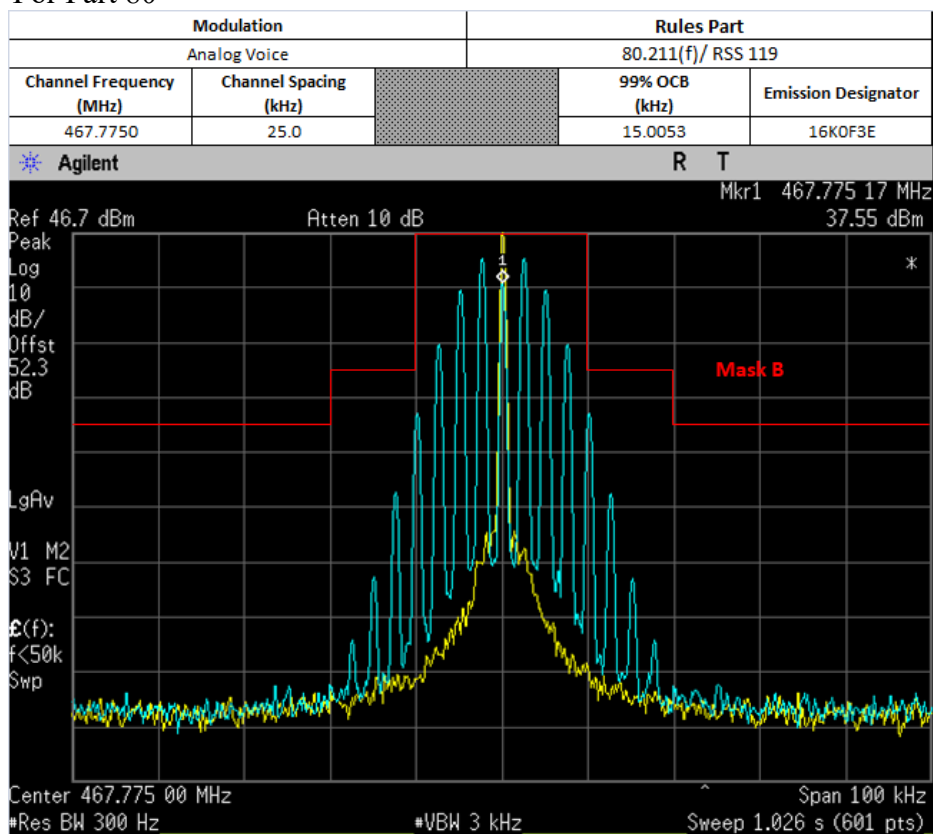


Not for FCC review

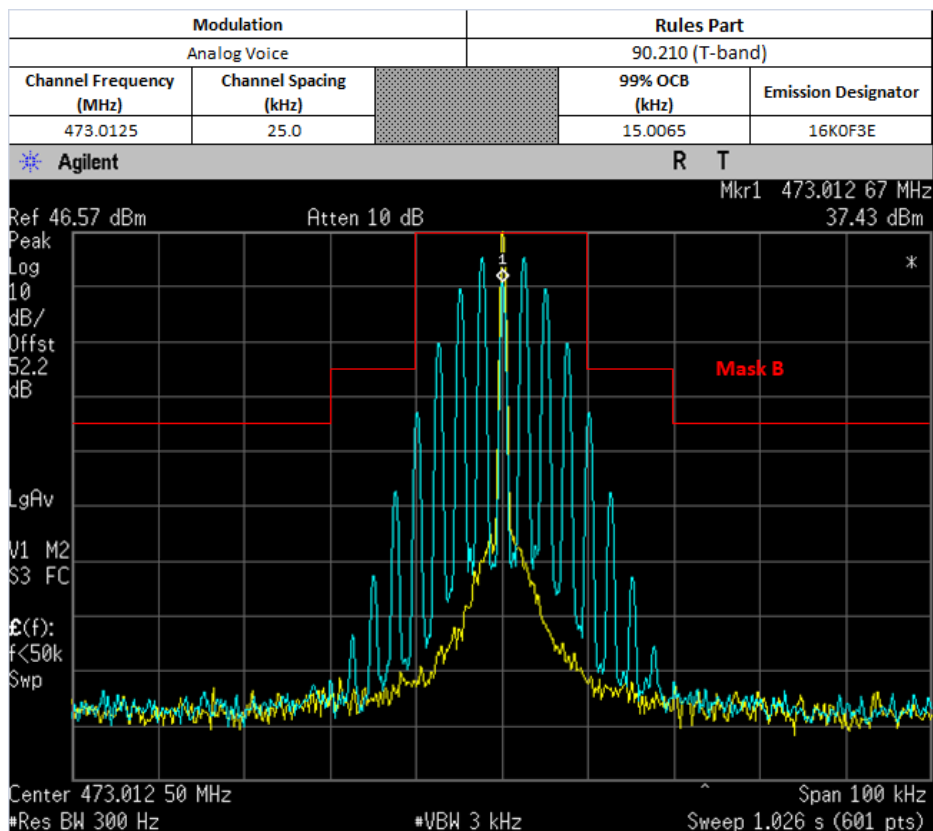
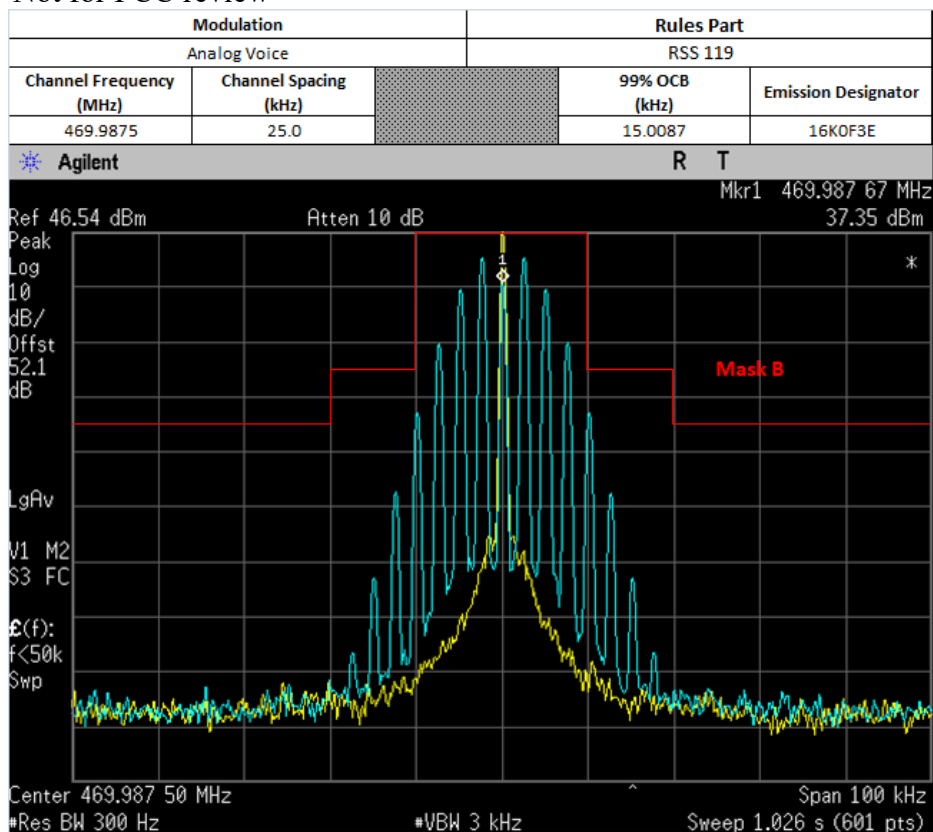


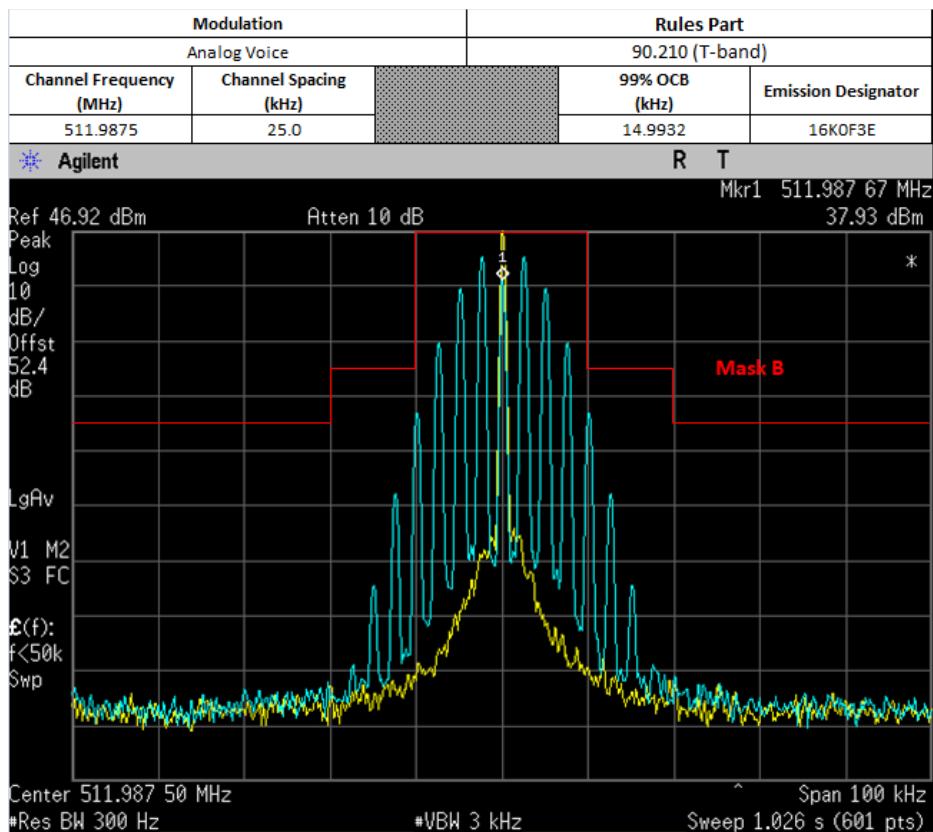


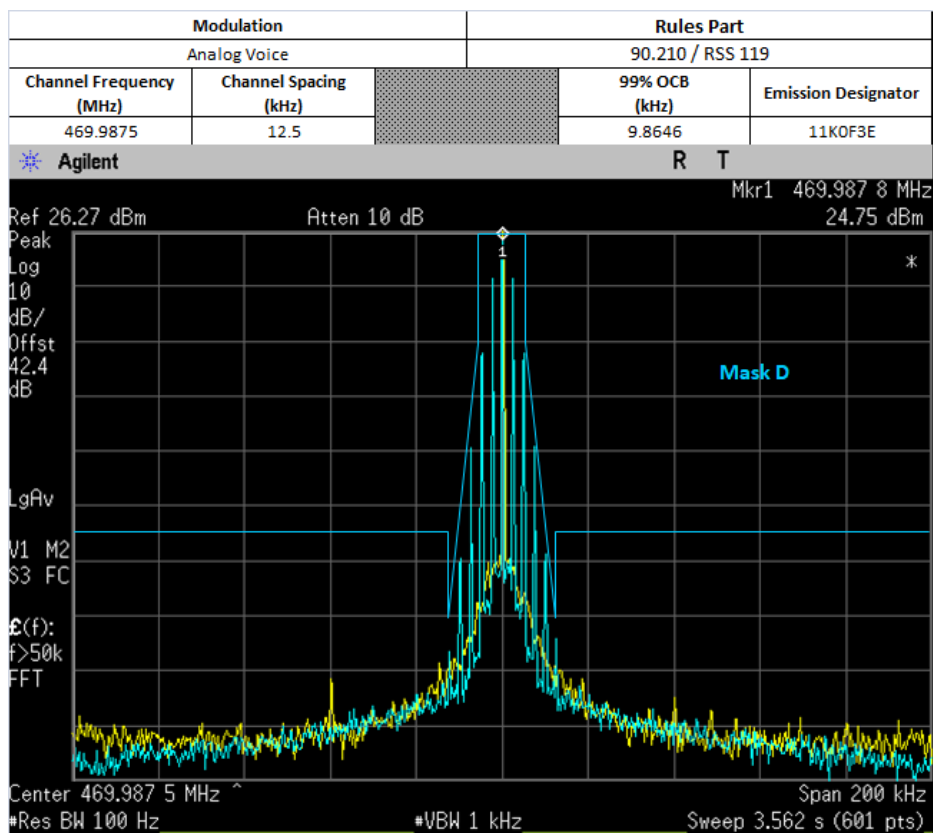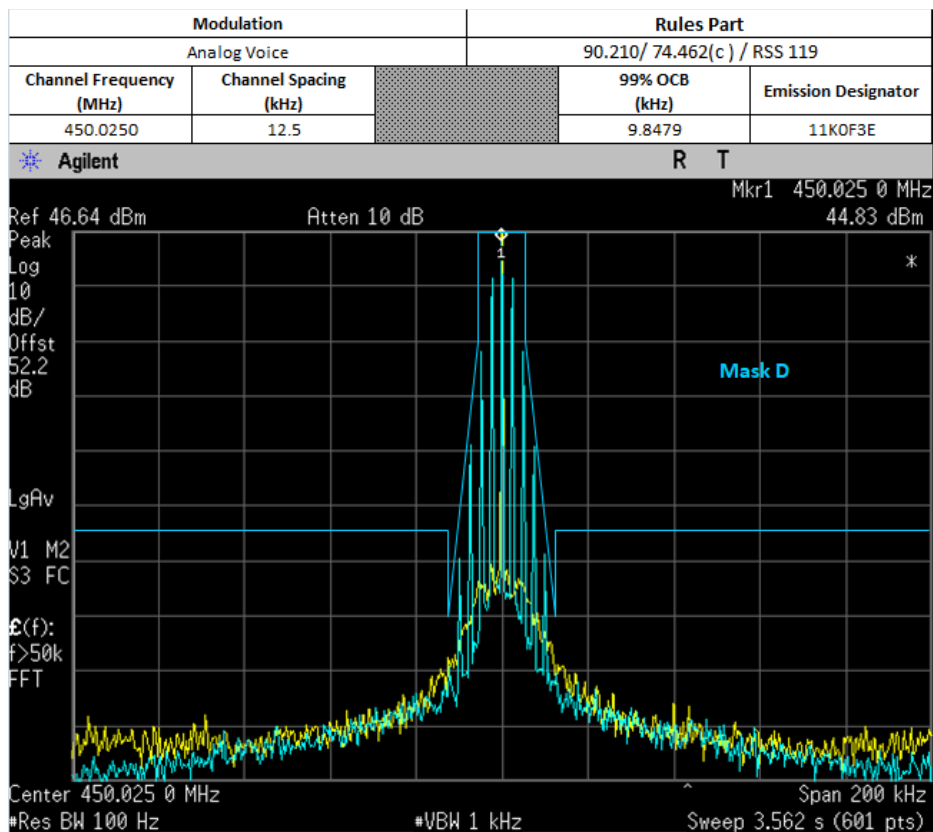

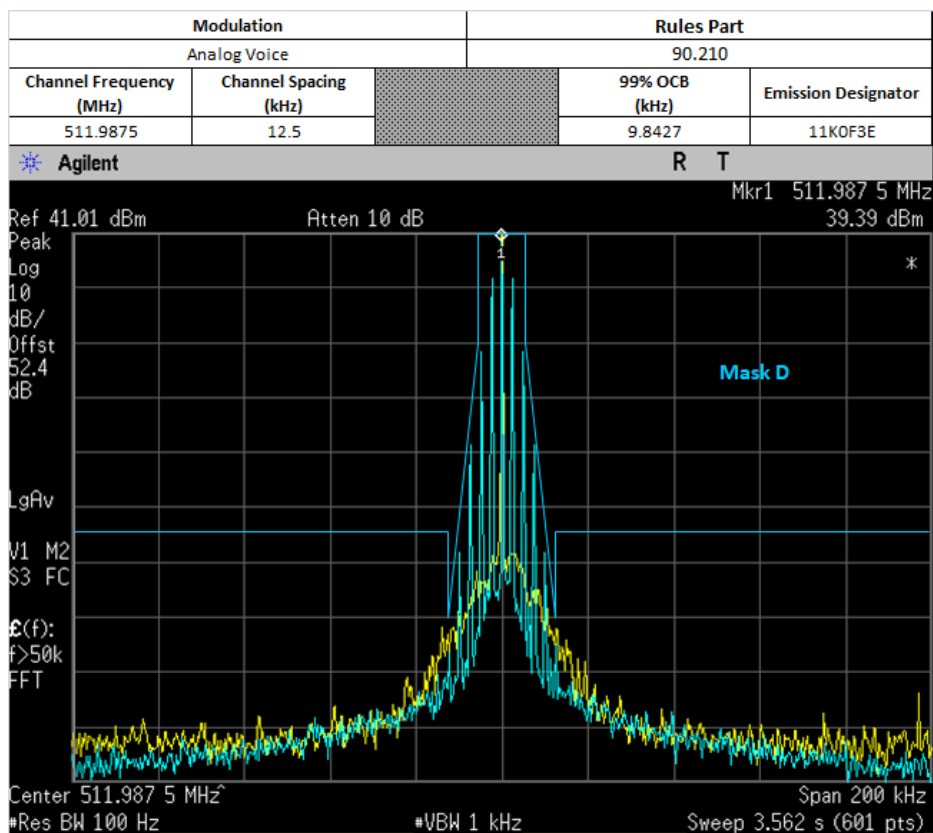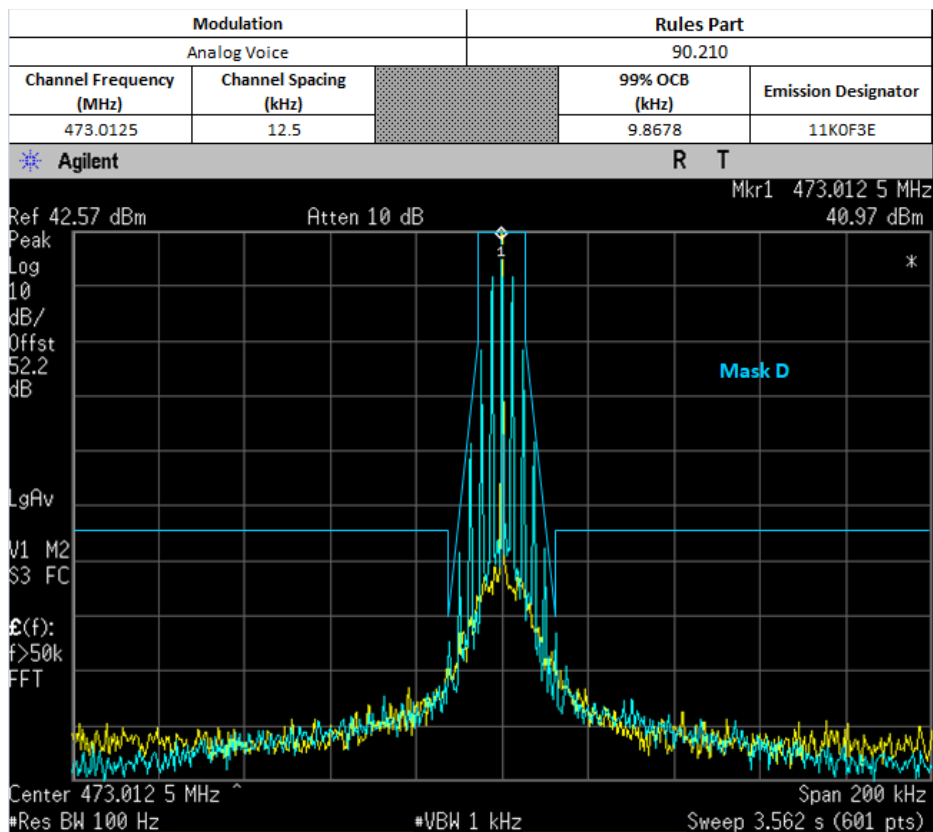


Part 80 only

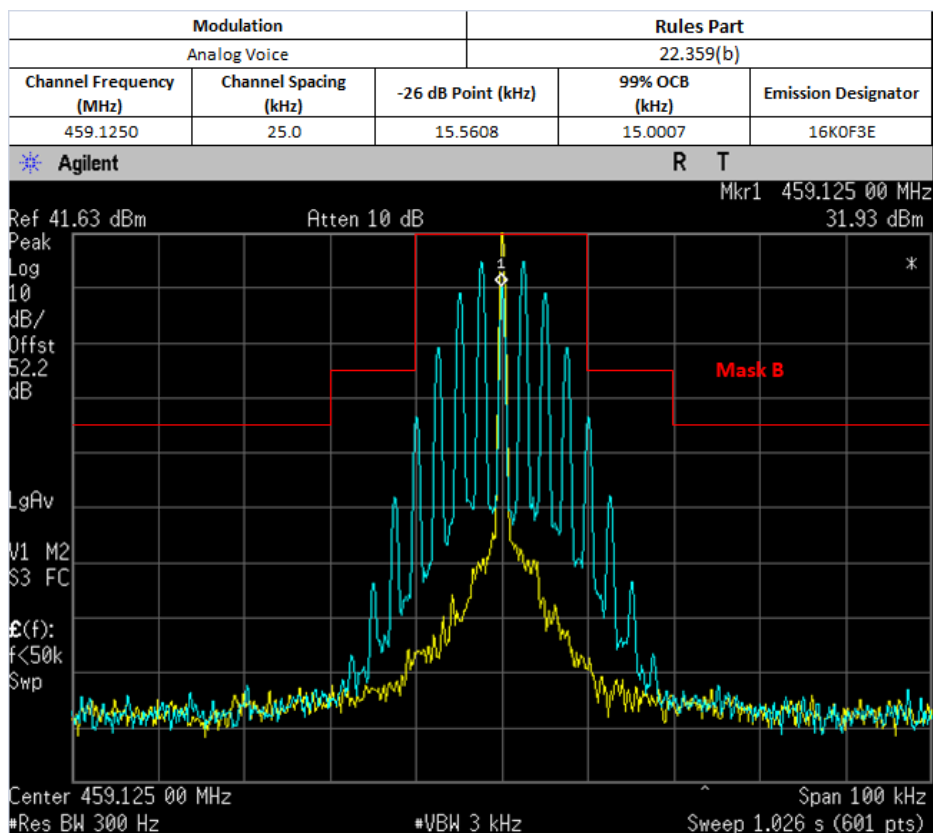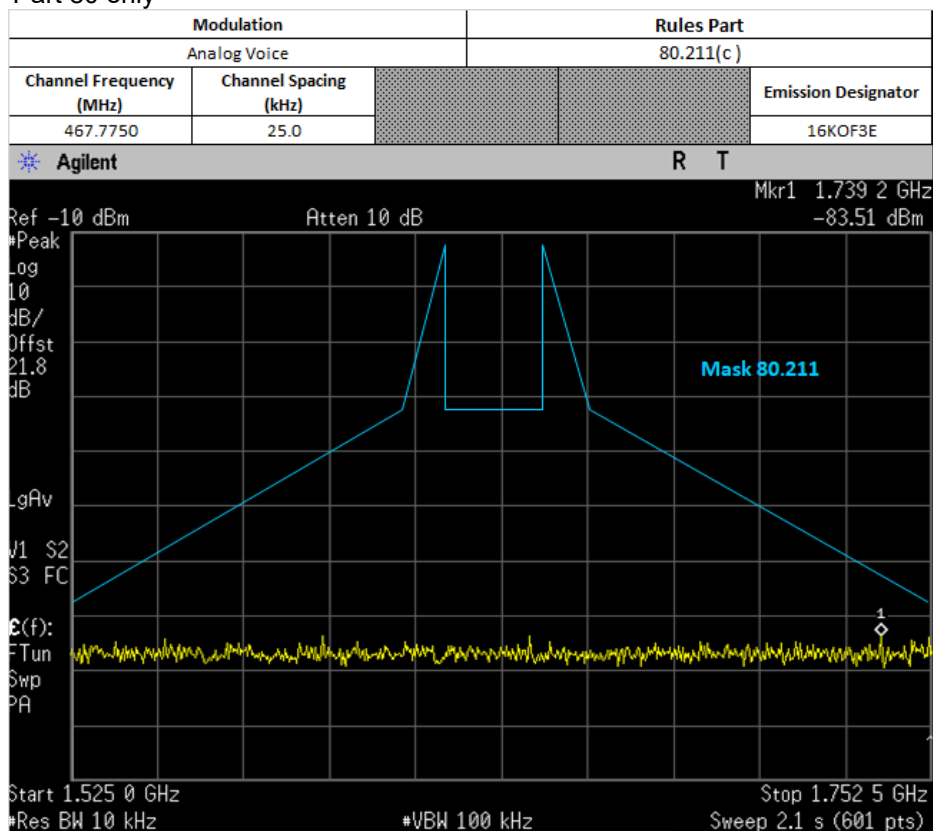

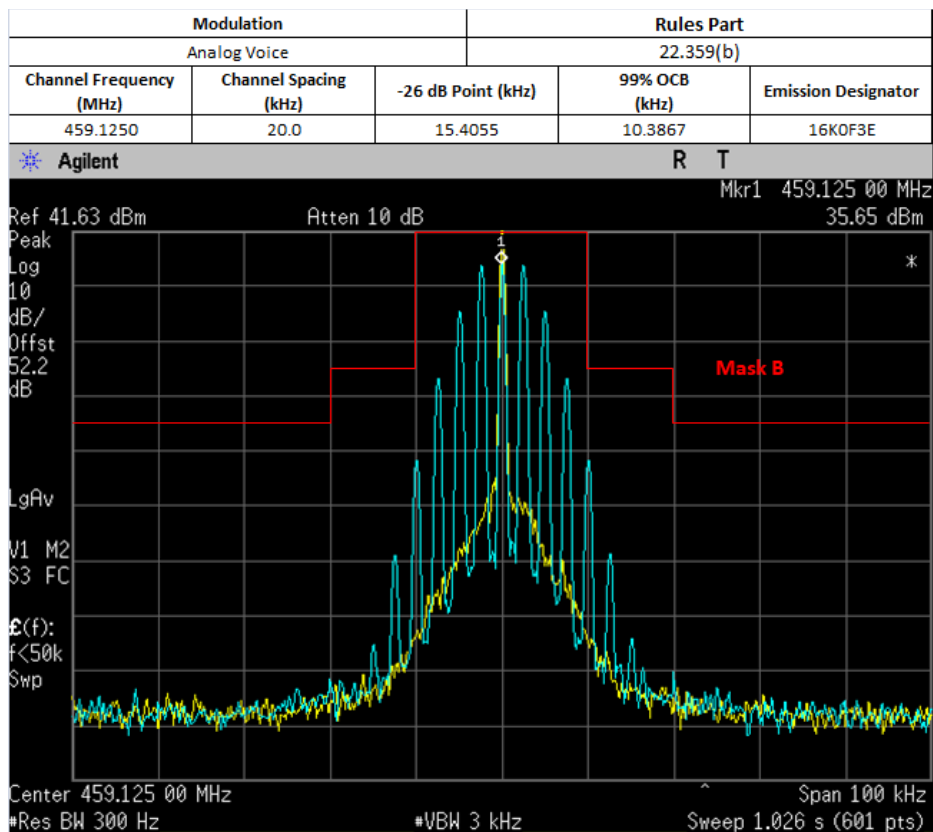

6.5.3. Test Setup (Digital)

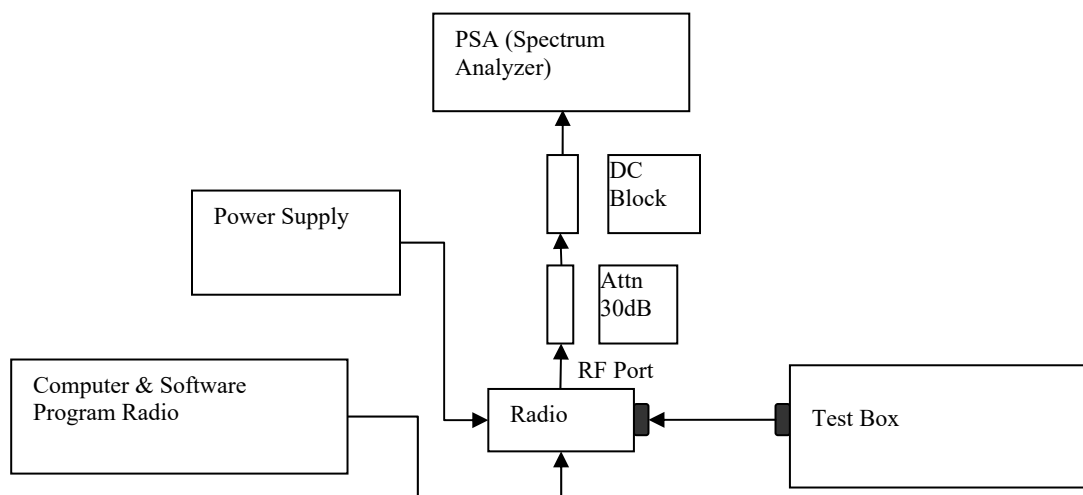

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.



6.5.4. Test Result (Digital)


Digital (12.5 kHz Channelization, Digital Voice/Data/Voice+Data):
Emission Designator 7K60F1E/D/W



The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).


F1E/D/W portion of the designator indicates digital voice/data/voice+data.



Therefore, the entire designator for 12.5 kHz channelization digital voice is 7K60F1E/D/W.

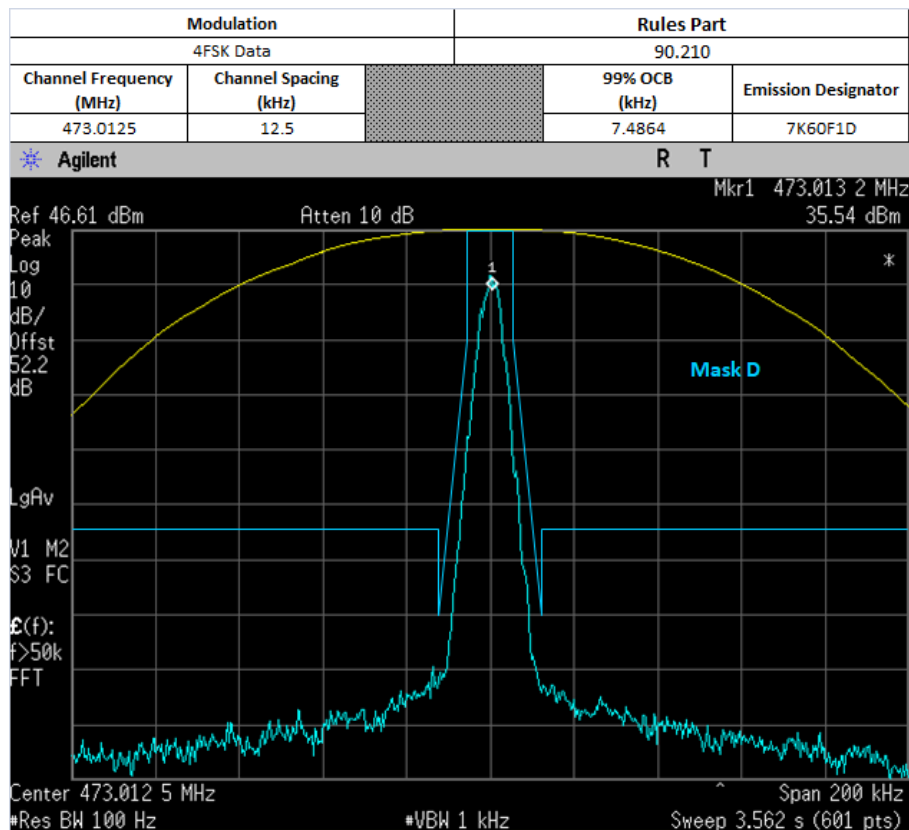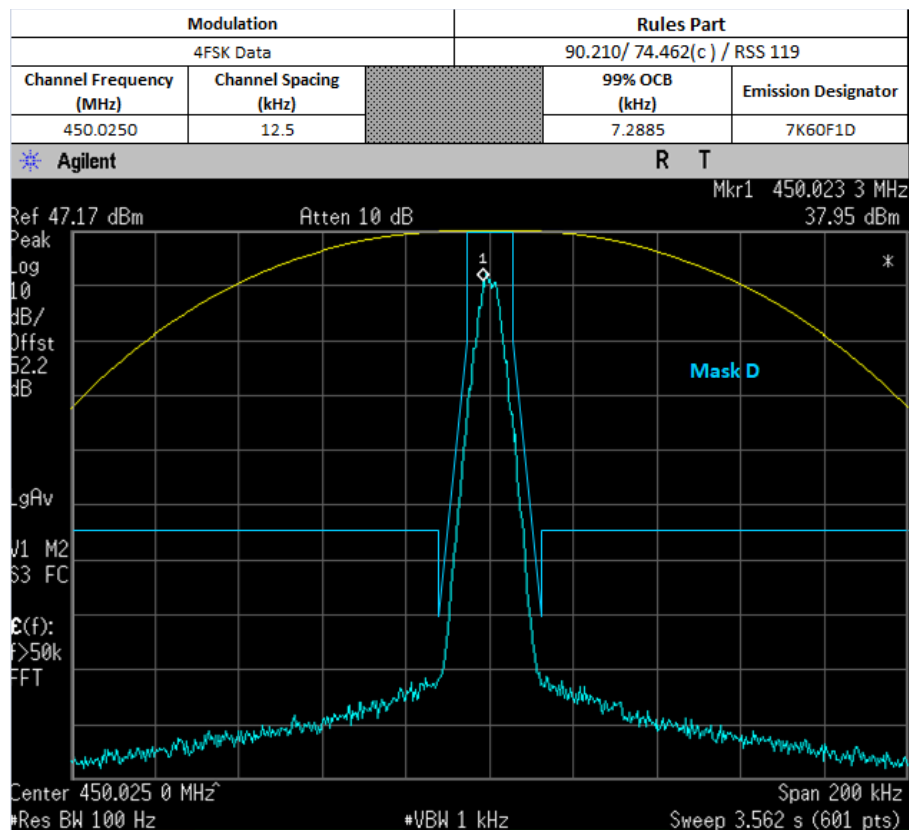



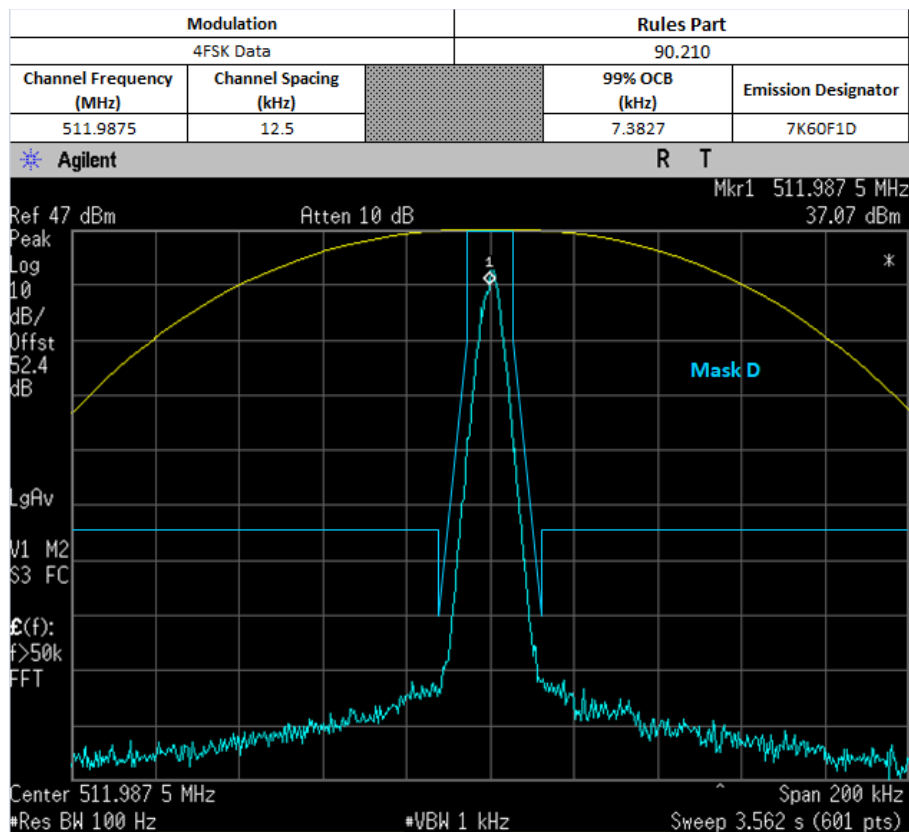


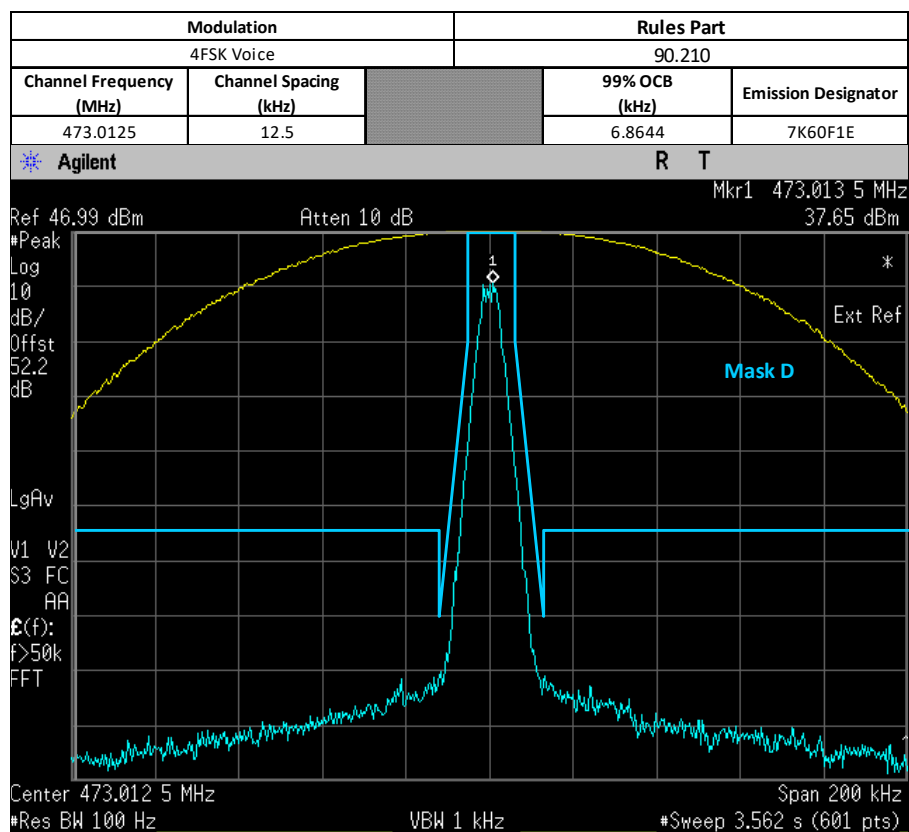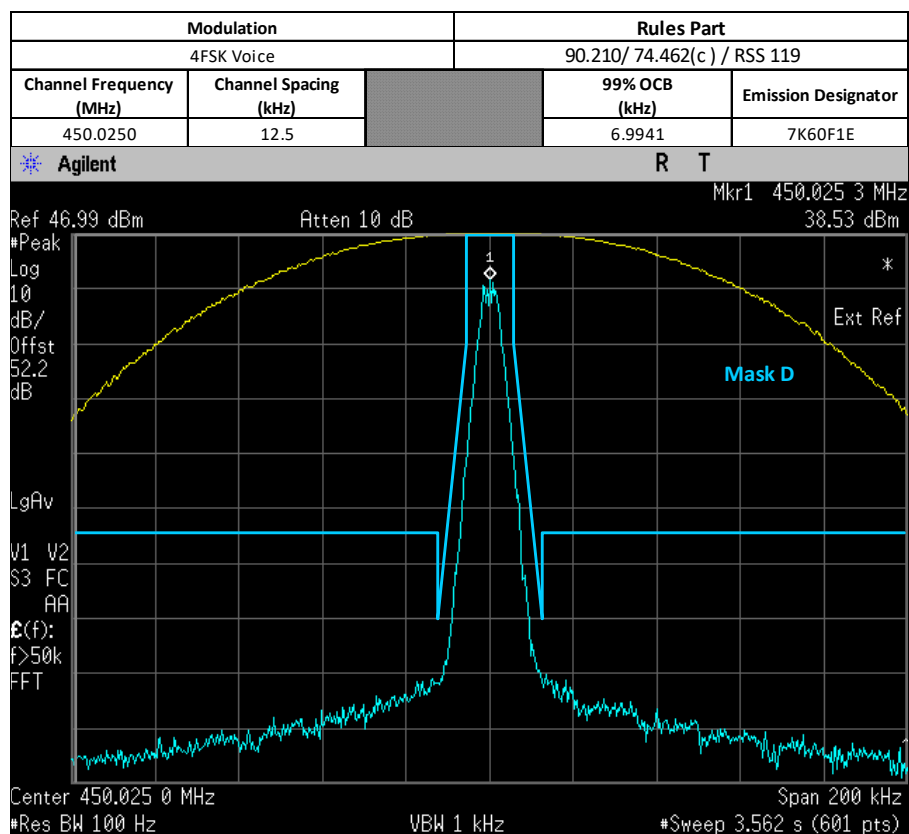


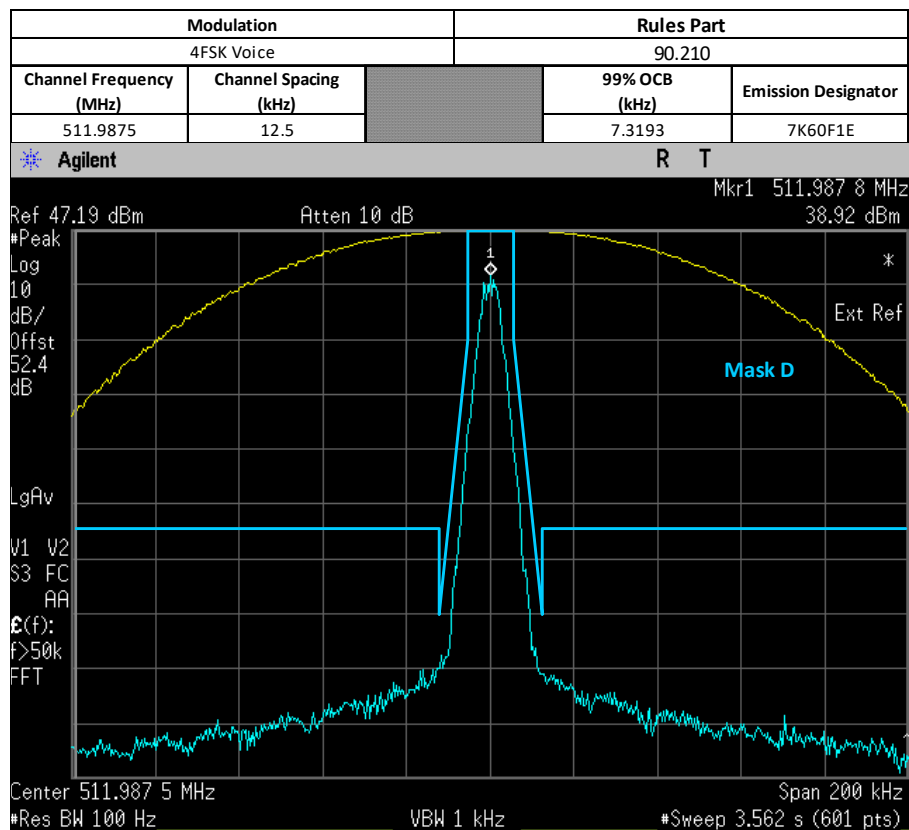

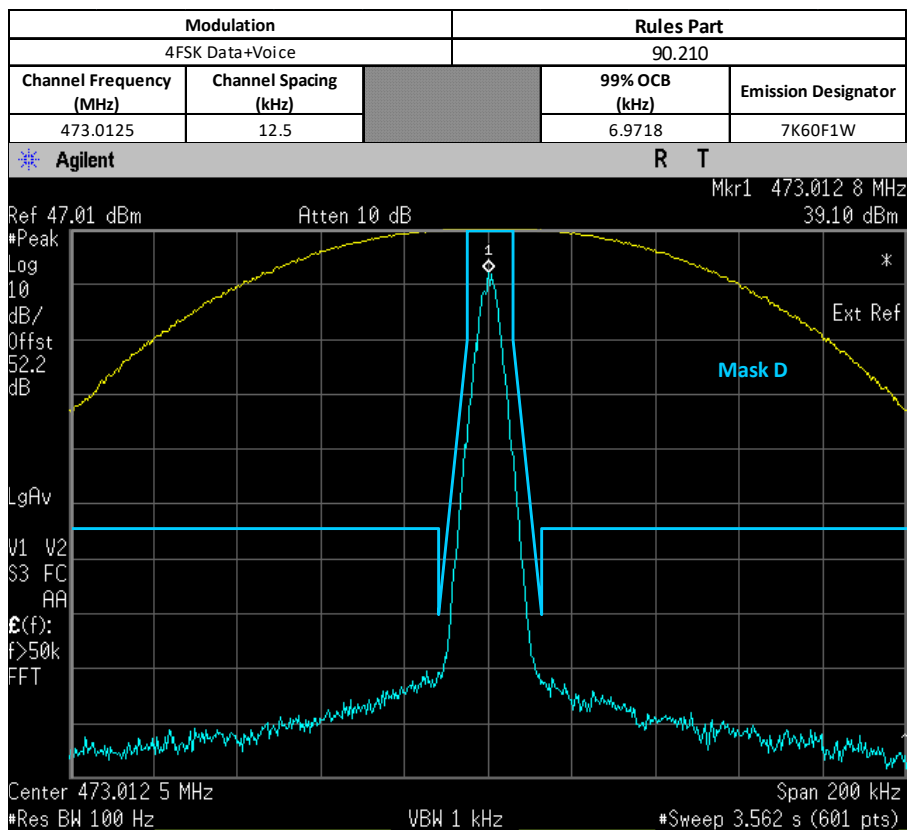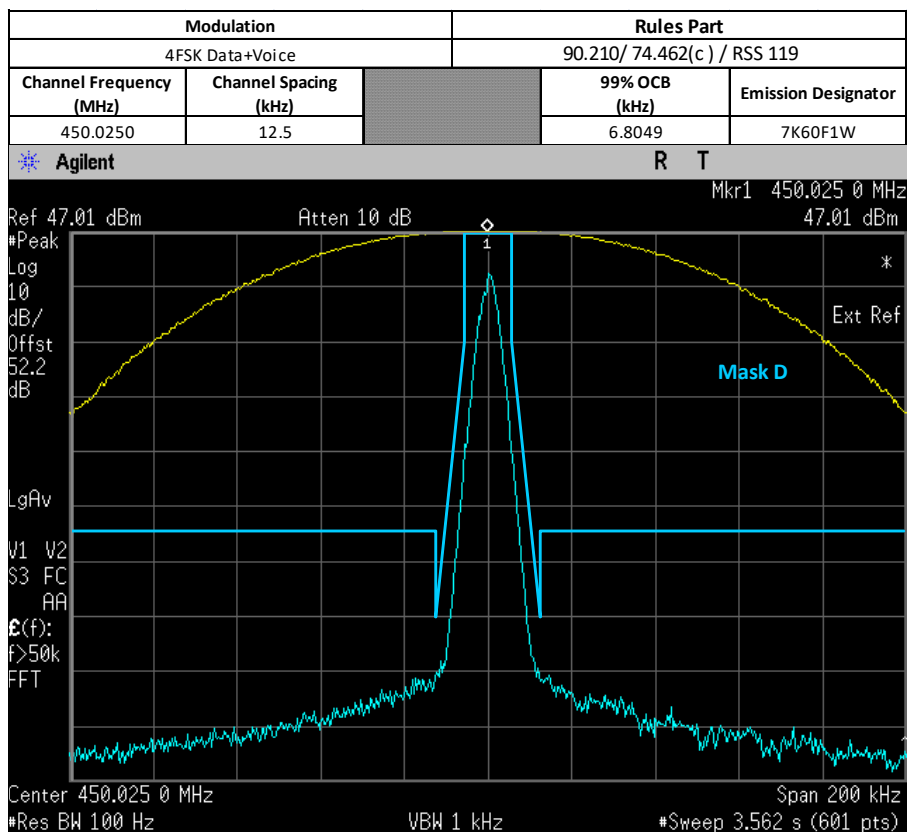

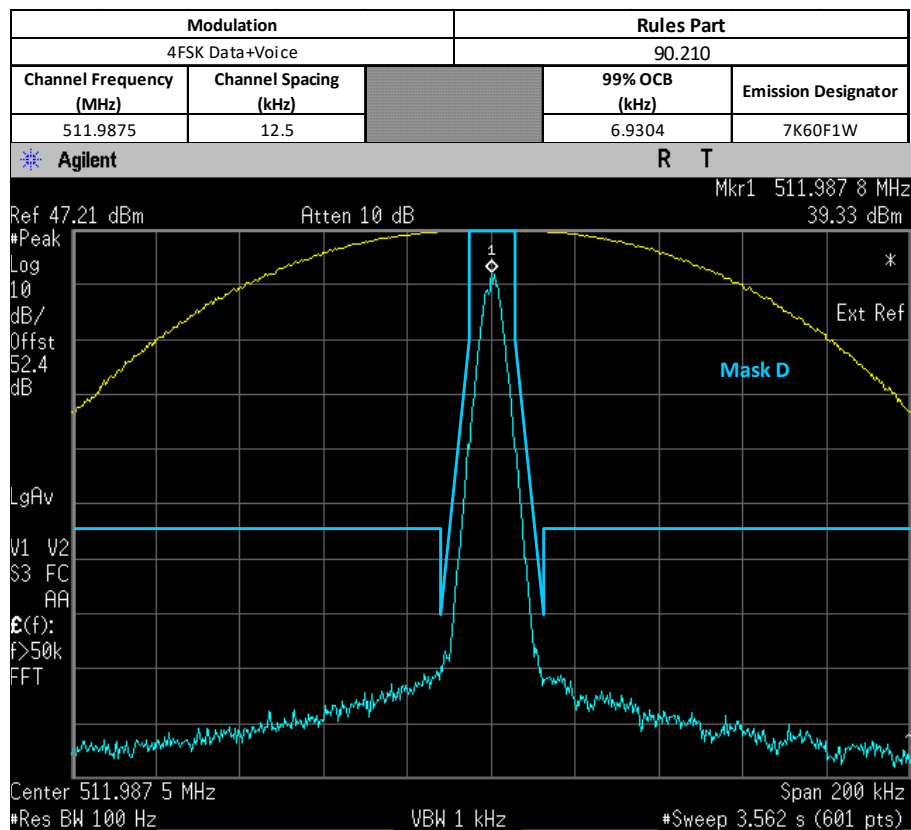

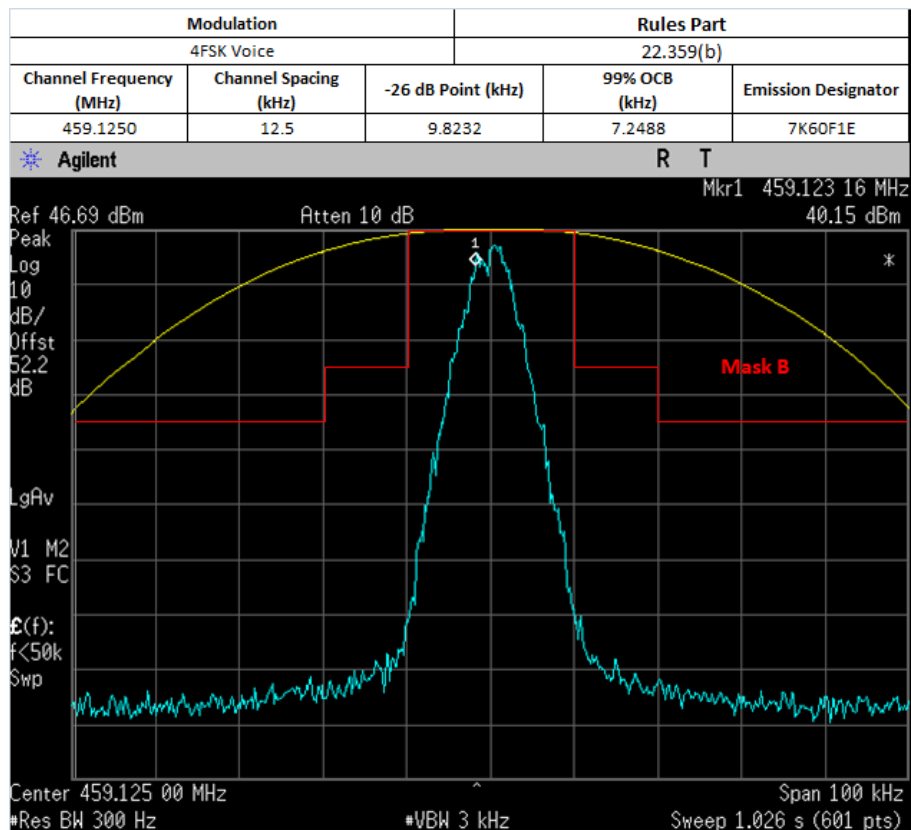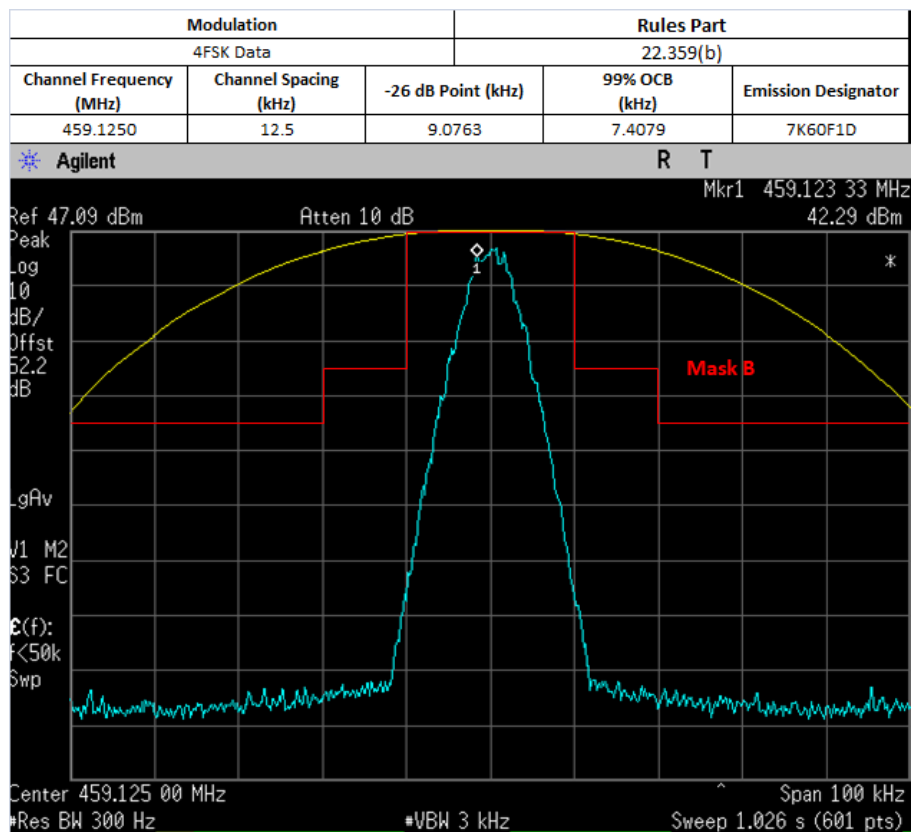

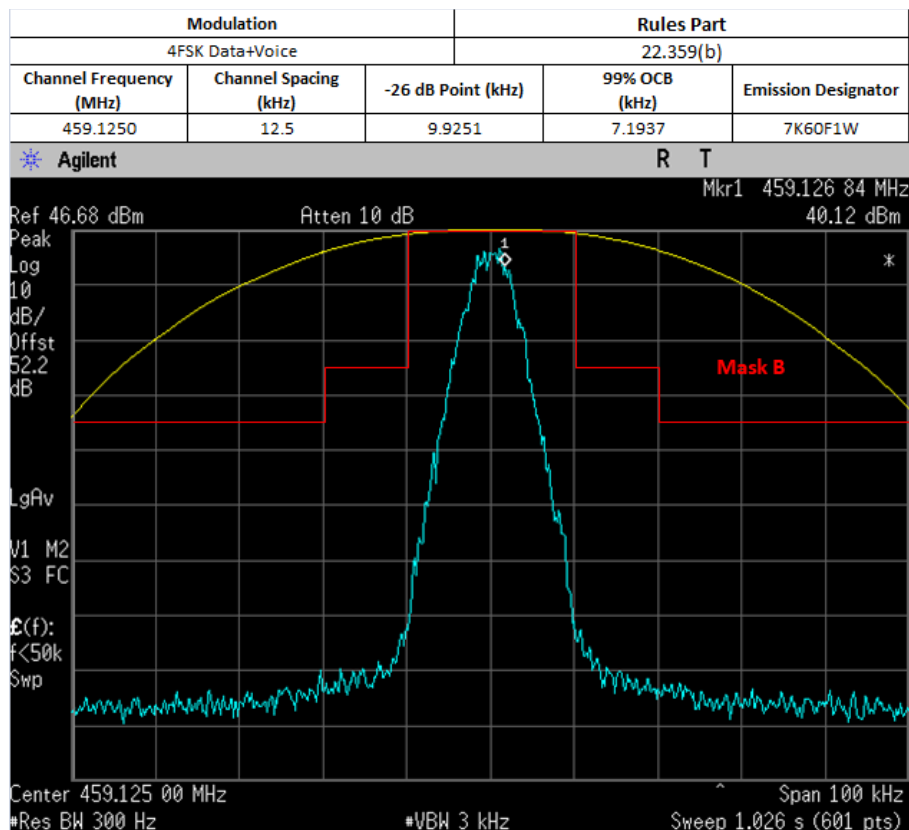


6.5.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.6. Band Edge Conducted Spurious Emission (Part 22)

6.6.1. Test Setup (Analog)

A. Get Fc for reference

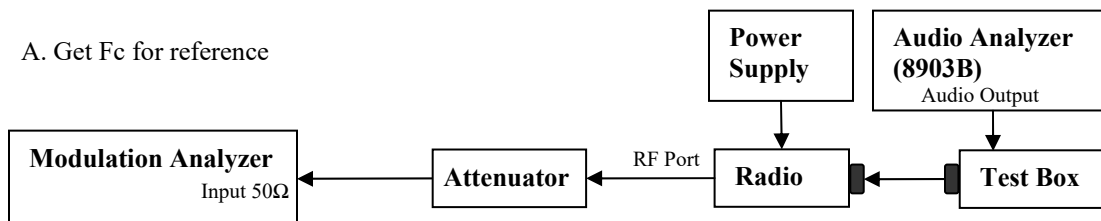

B. Testing

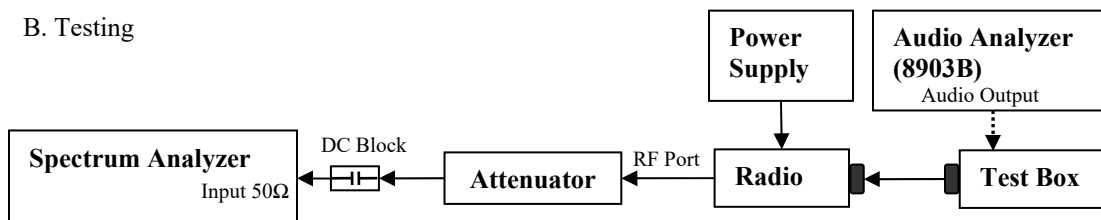


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.6.2. Test Result (Analog)


MAX POWER

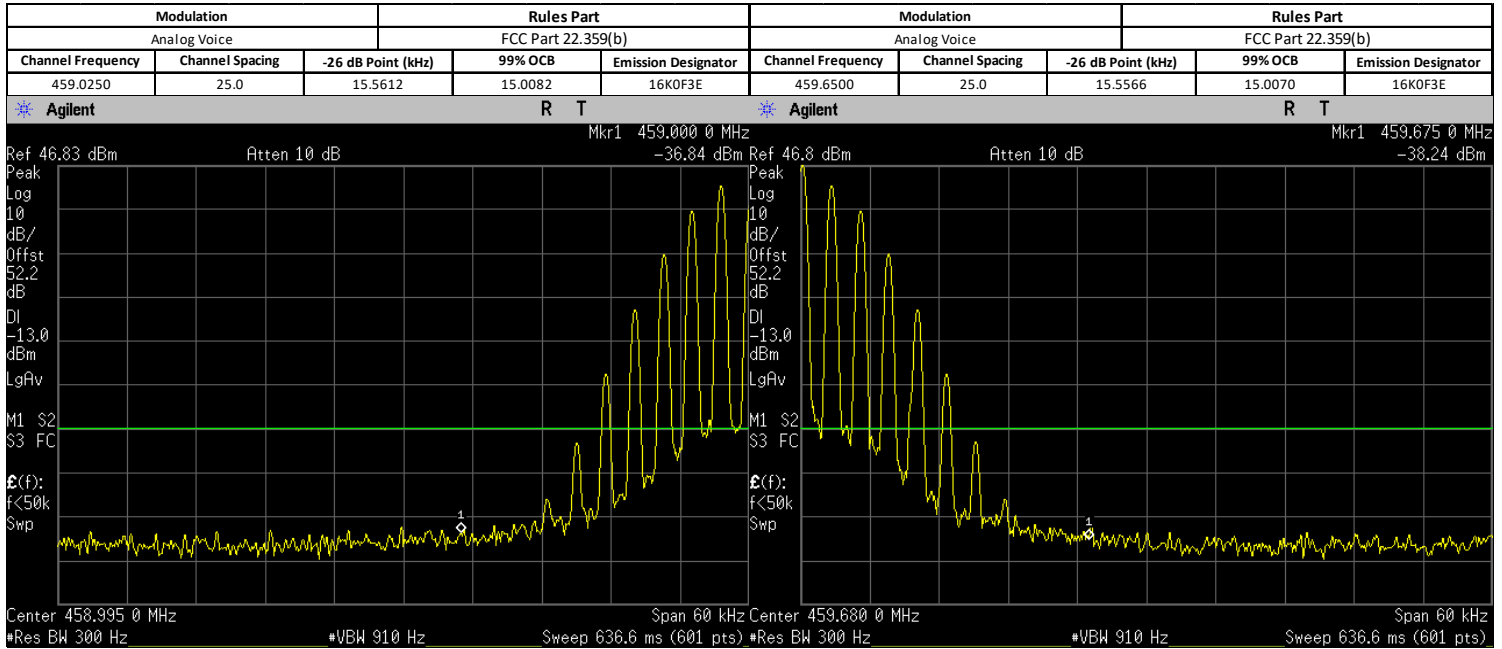


LOW POWER

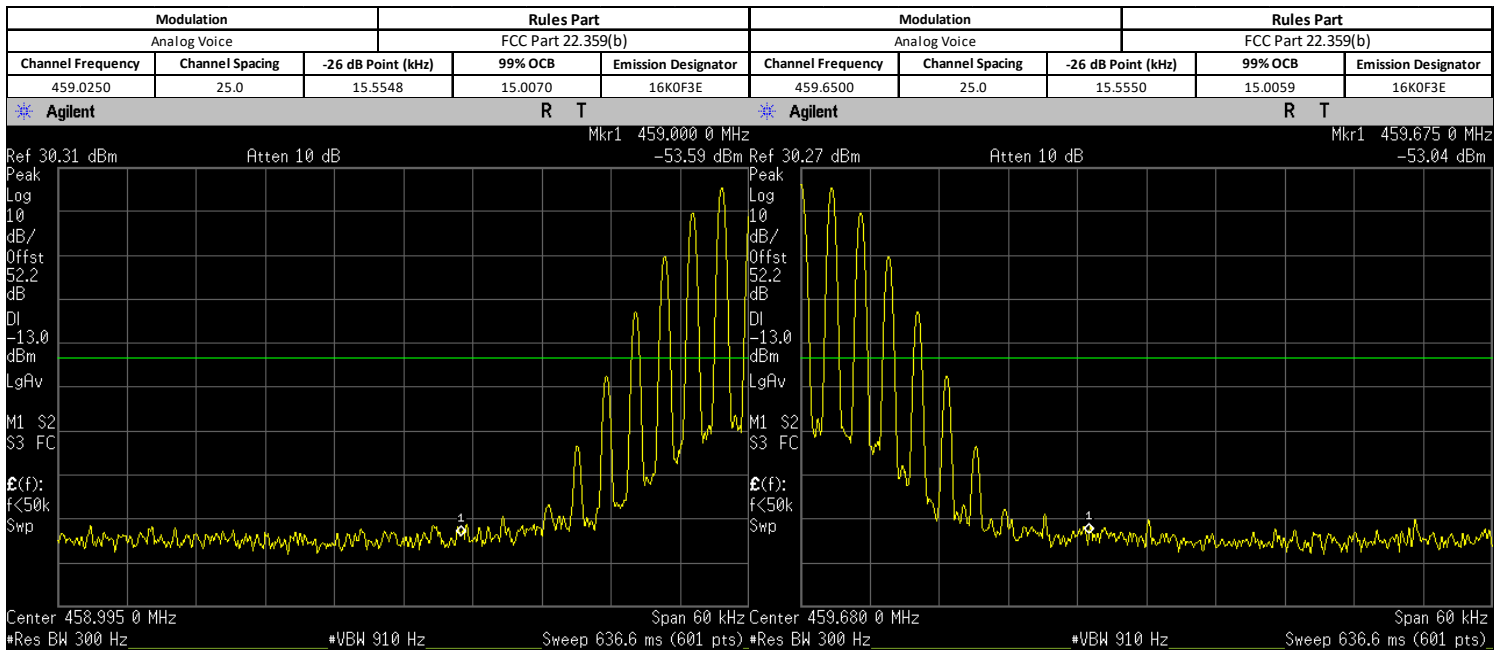


MAX POWER

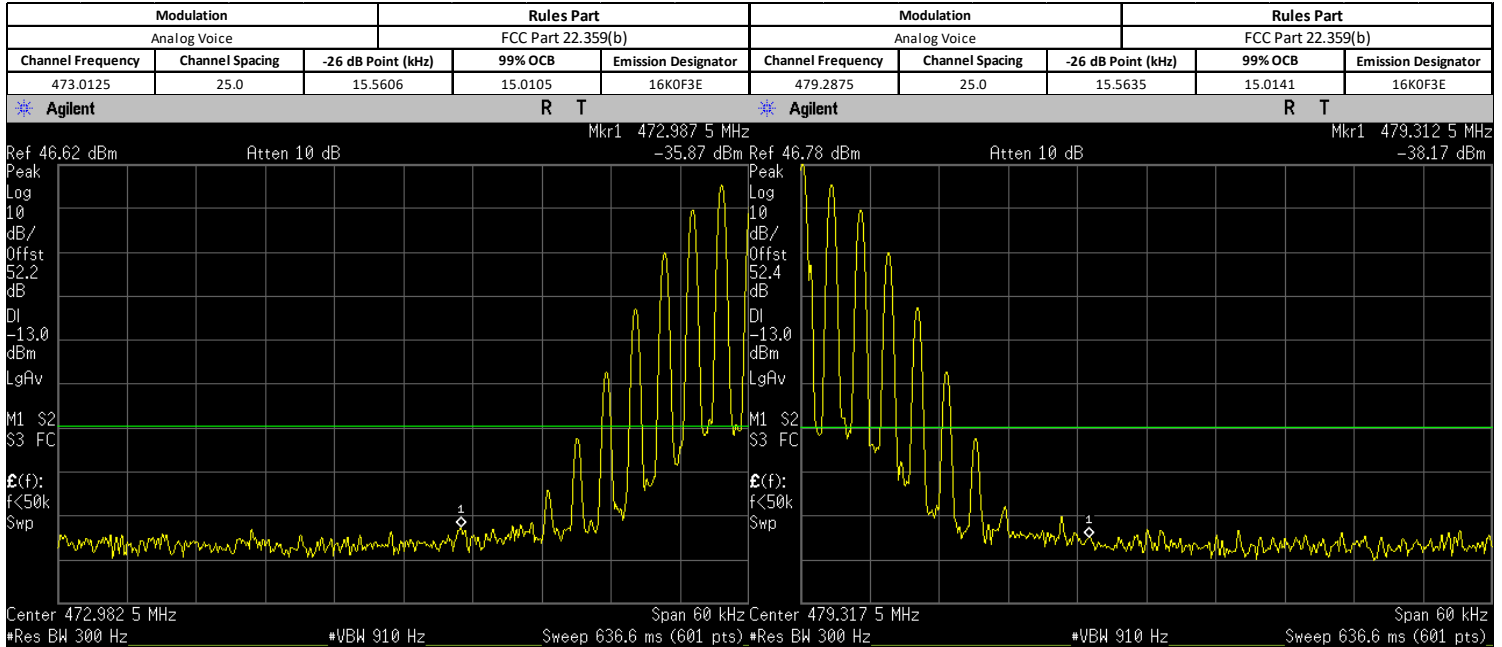

LOW POWER

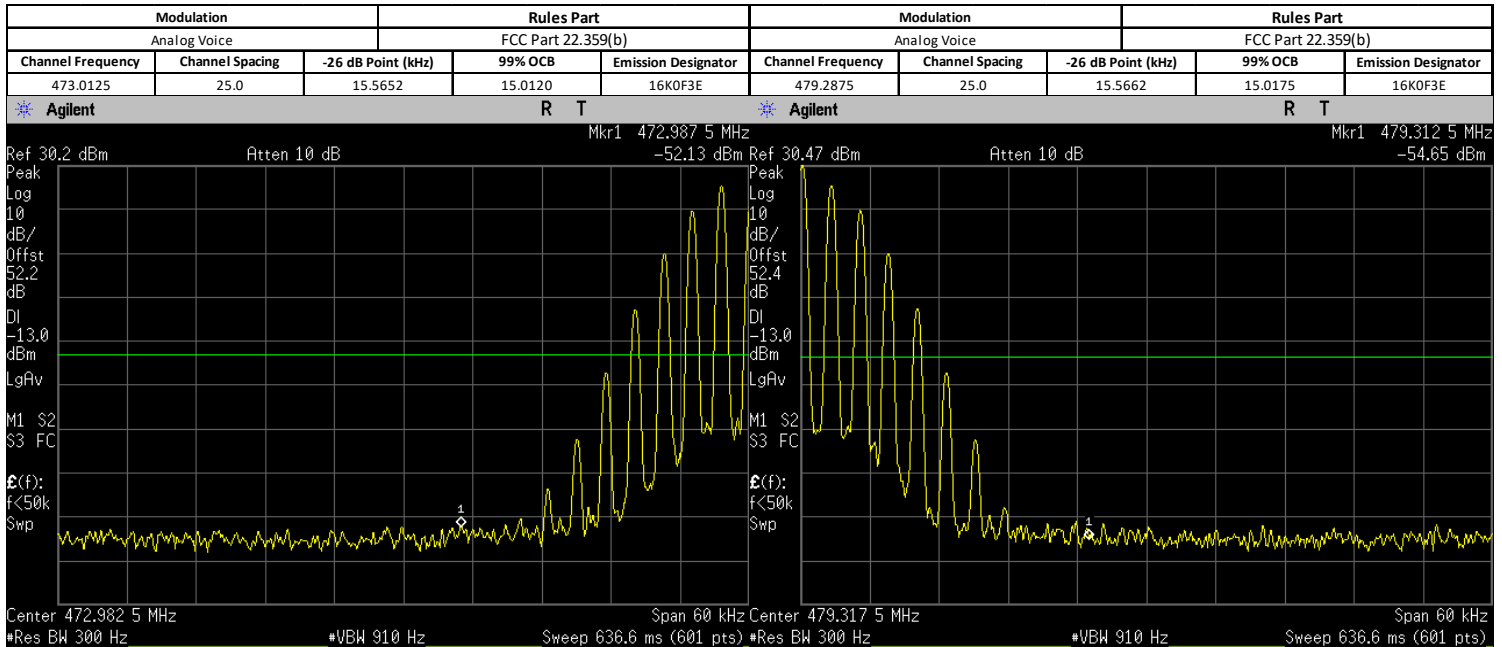

6.6.3. Test Setup (Digital)

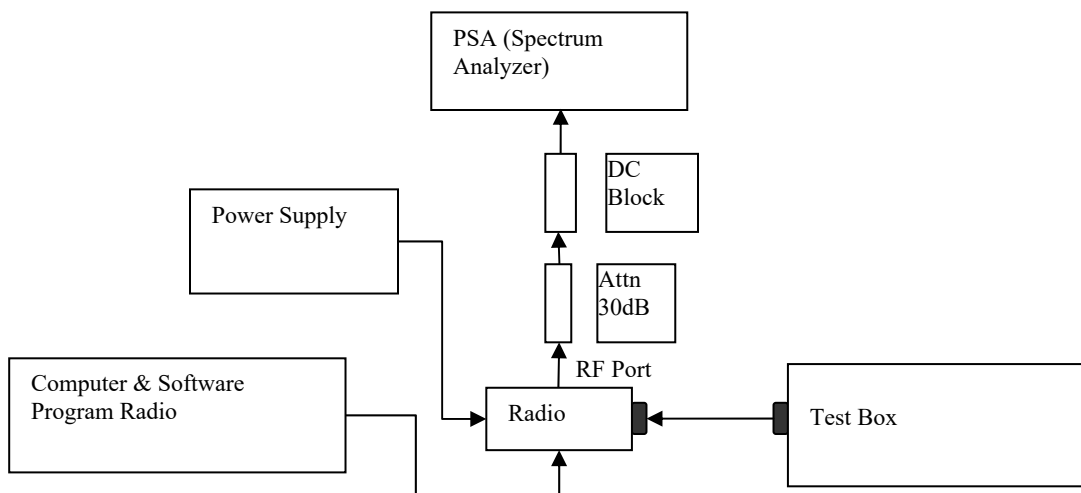


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:


- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)


MAX POWER

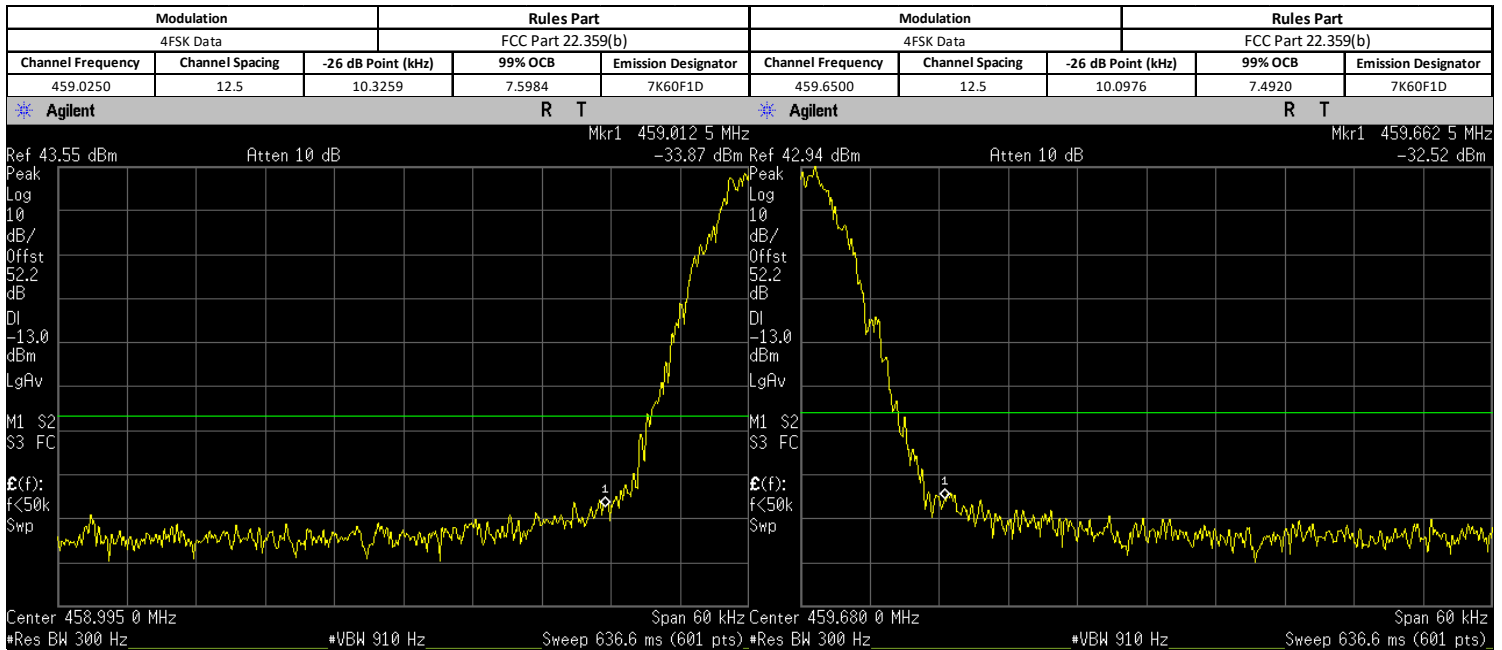


LOW POWER

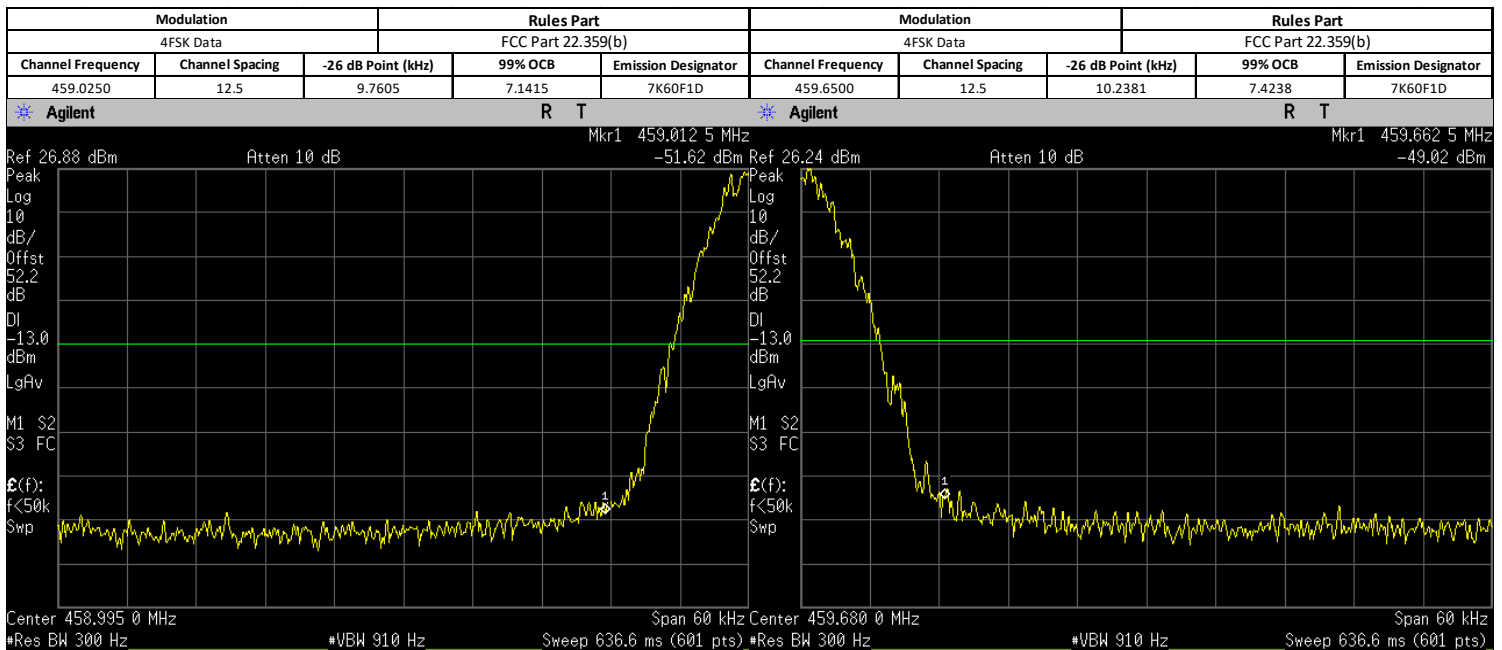

MAX POWER

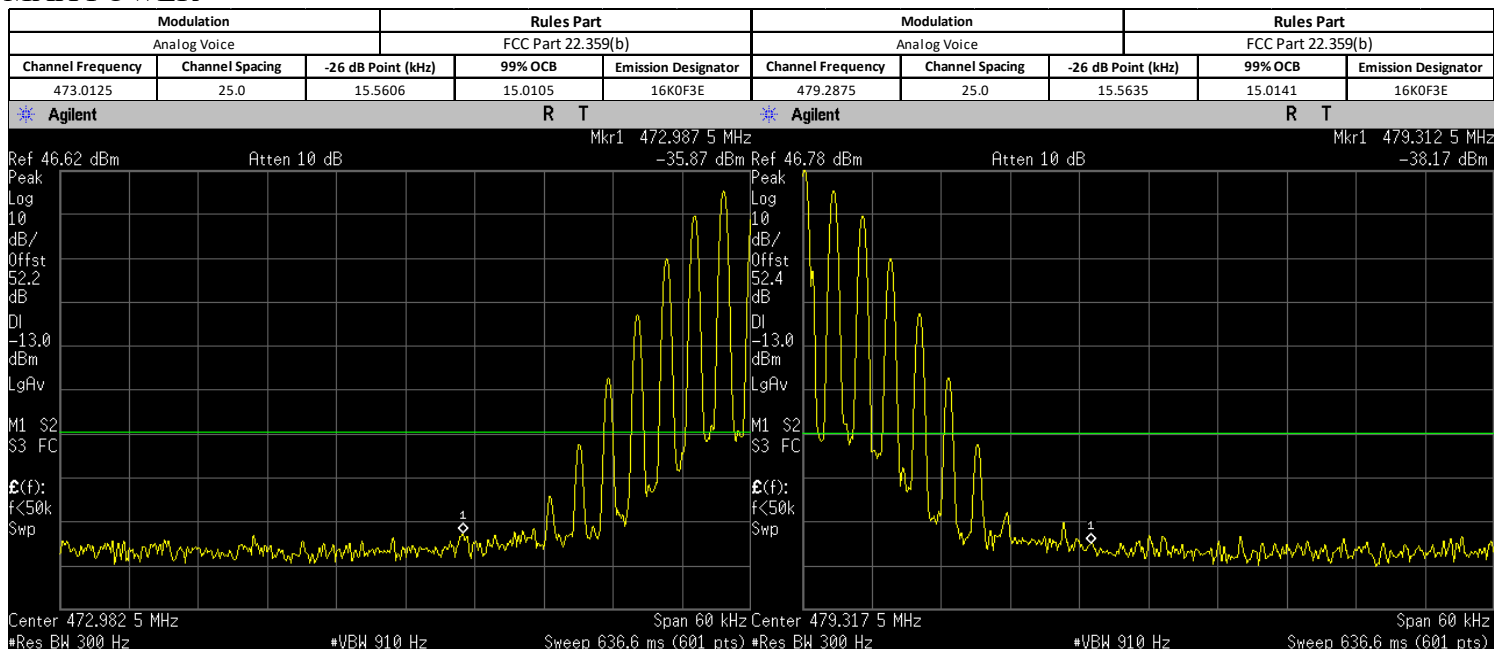

LOW POWER

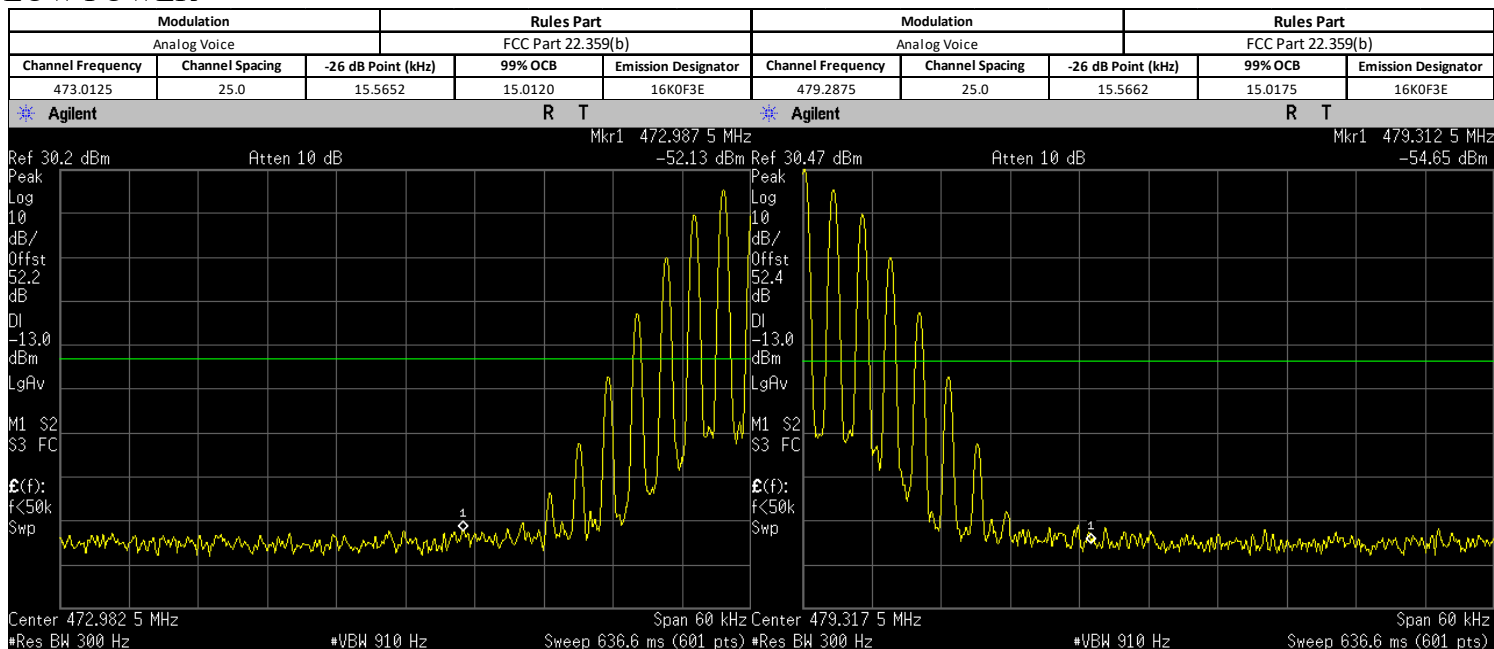


6.6.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


6.7. Transient Frequency Behavior

6.7.1. Test Setup


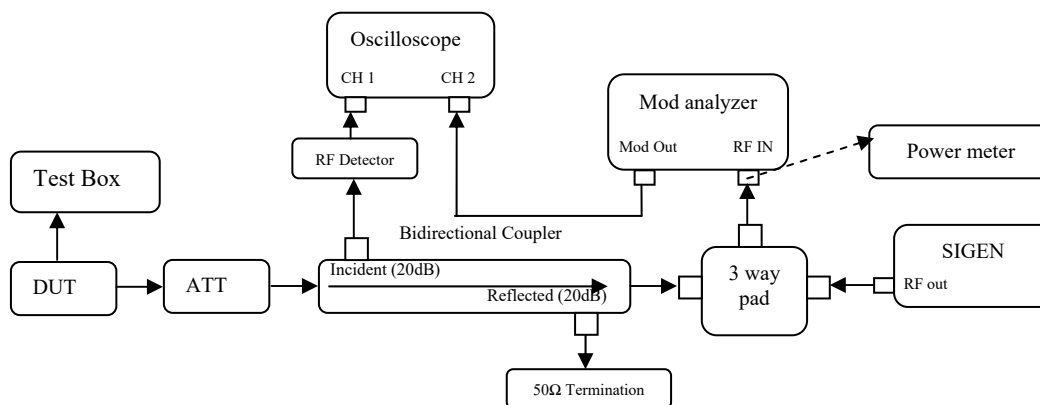


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.7.2. Test Result

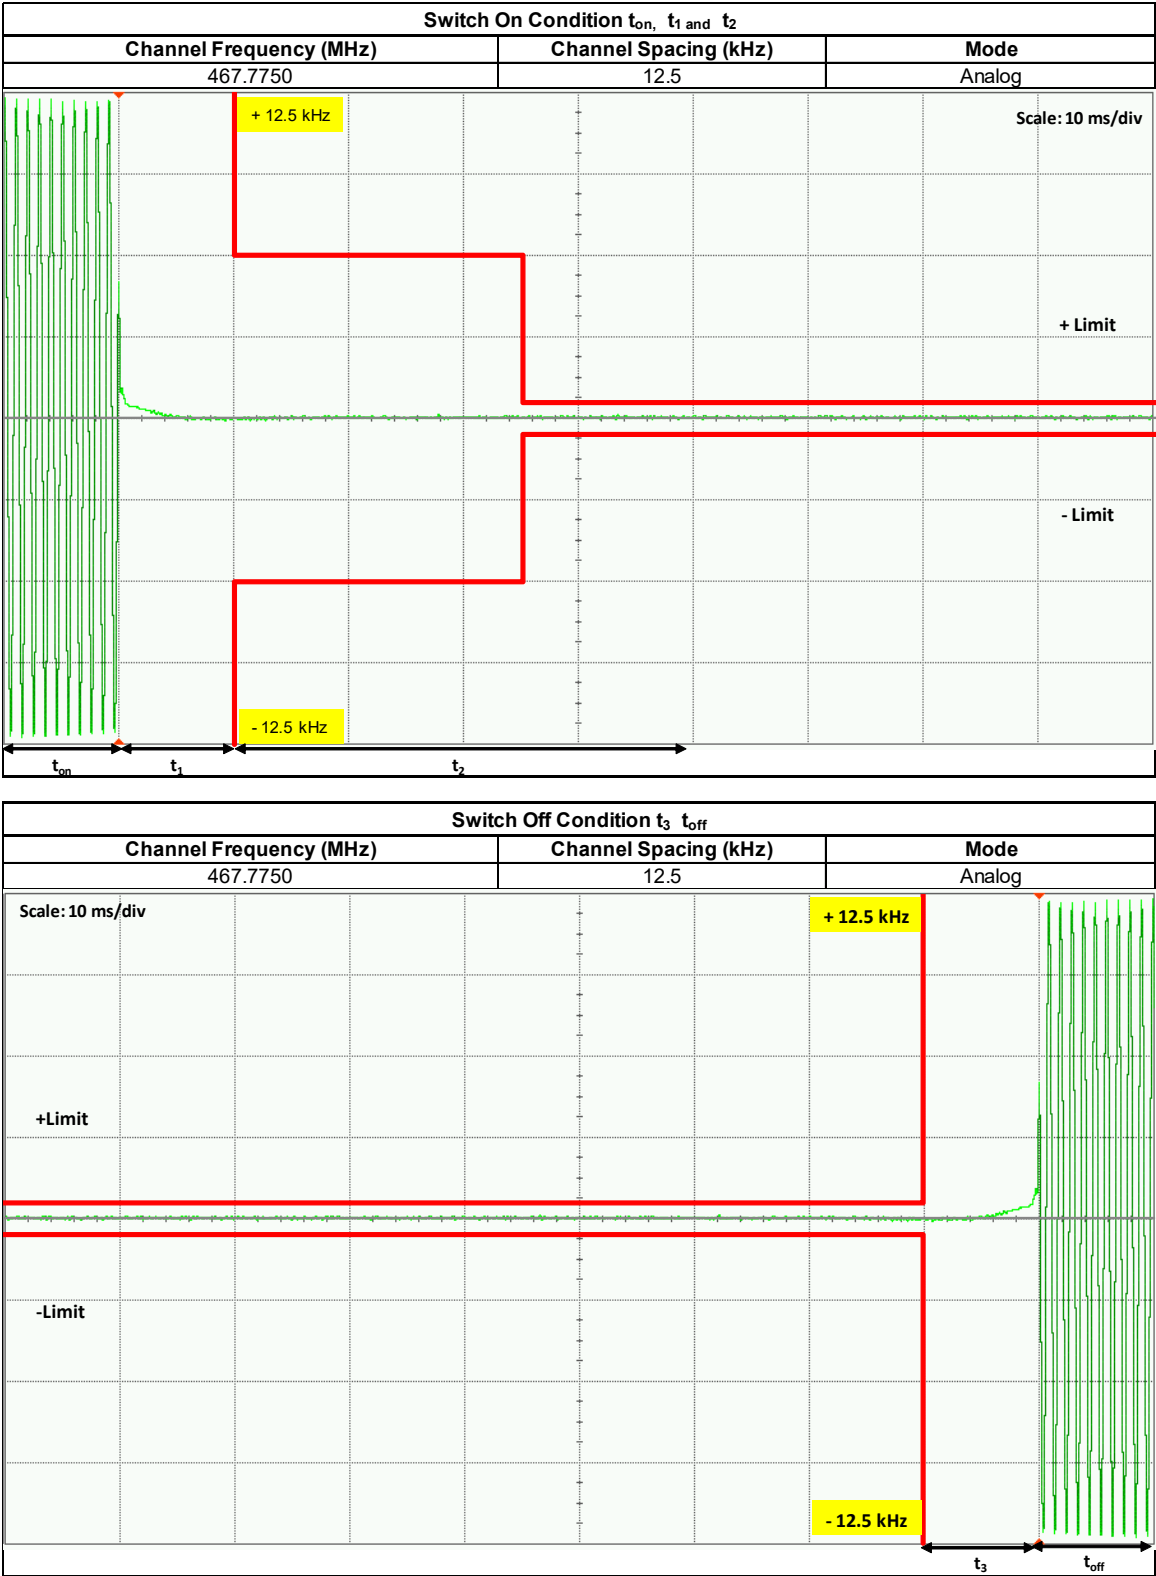

Not for FCC review

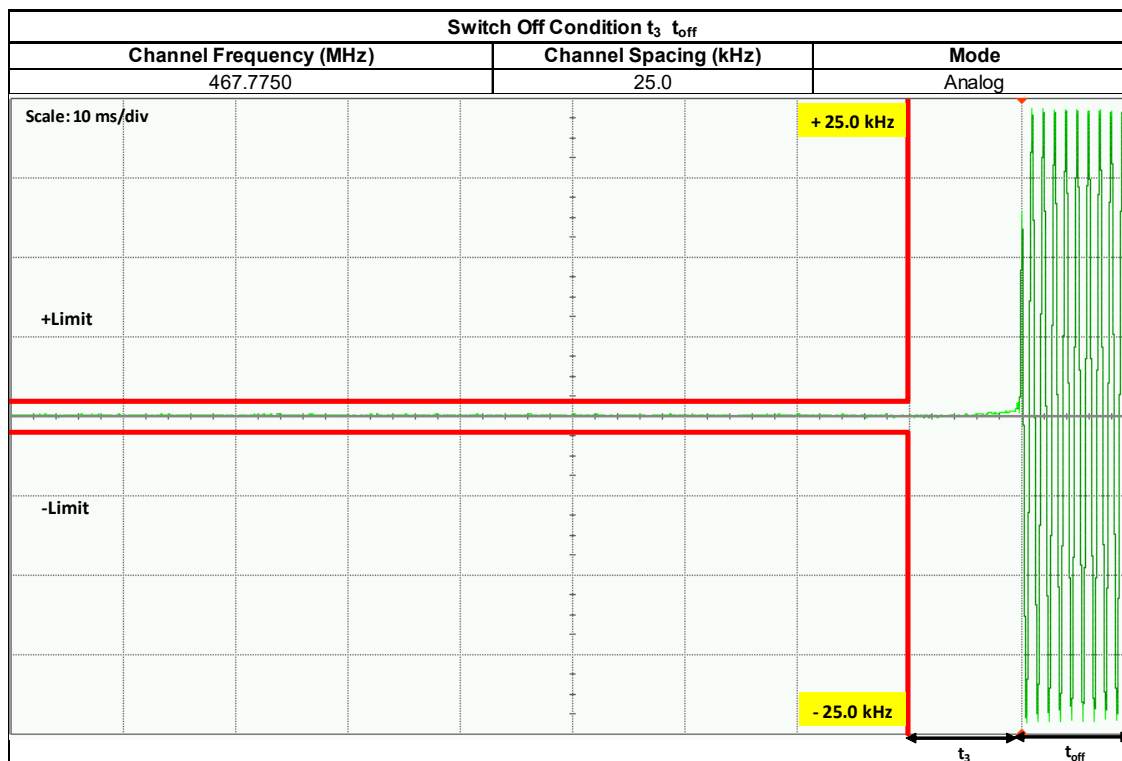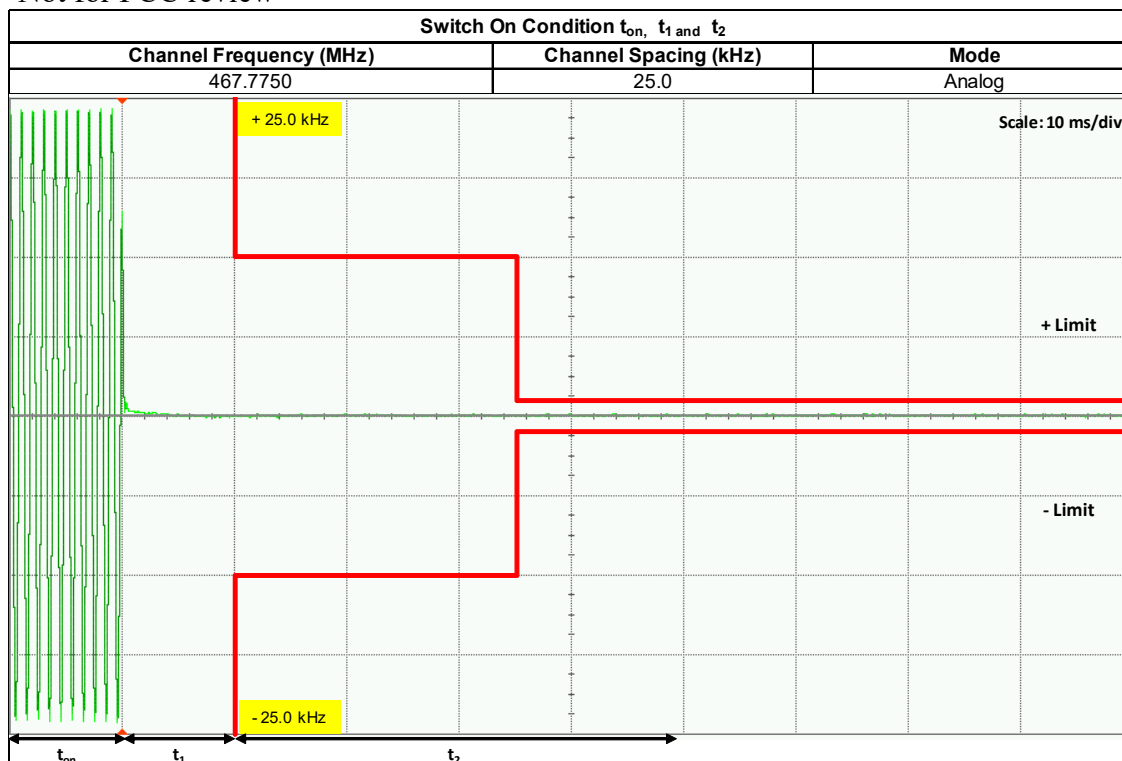

6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.8. Adjacent Channel Power

6.8.1. Test Setup (Analog)

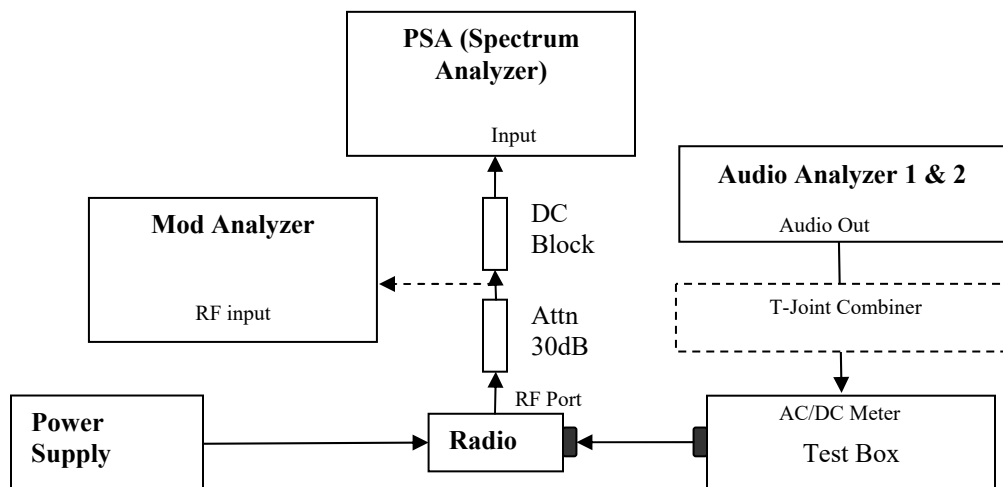


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.2. Test Result

Not Applicable

6.8.3. Test Setup (Digital)

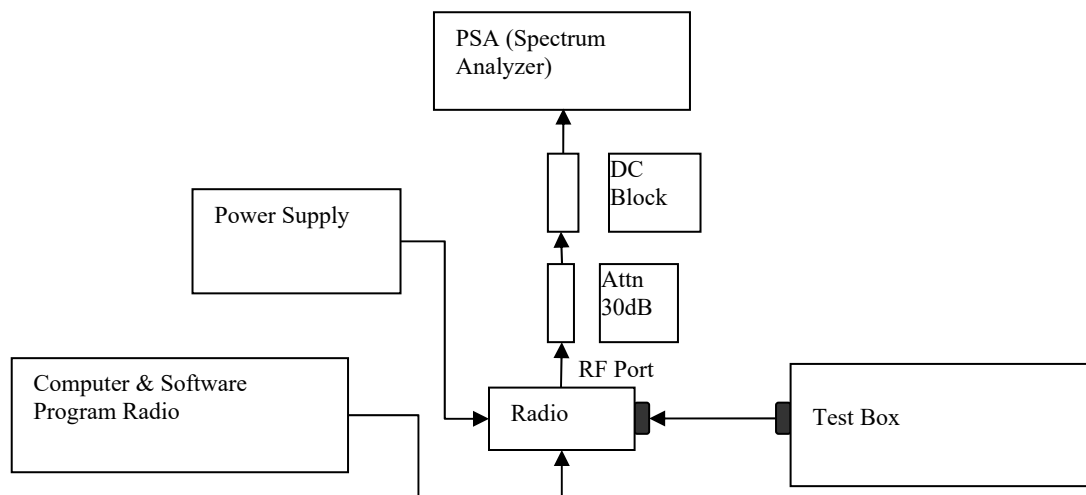

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.8.4. Test Result

Not Applicable

6.8.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.9. Conducted Spurious Emission


6.9.1. Test Setup

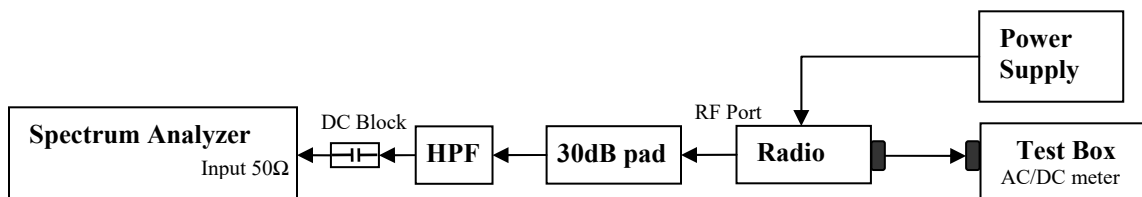

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.



6.9.2. Test Result (Analog)

Analog: 450.025. MHz, 25.kHz Channel Spacing, Max. Power For Part 74

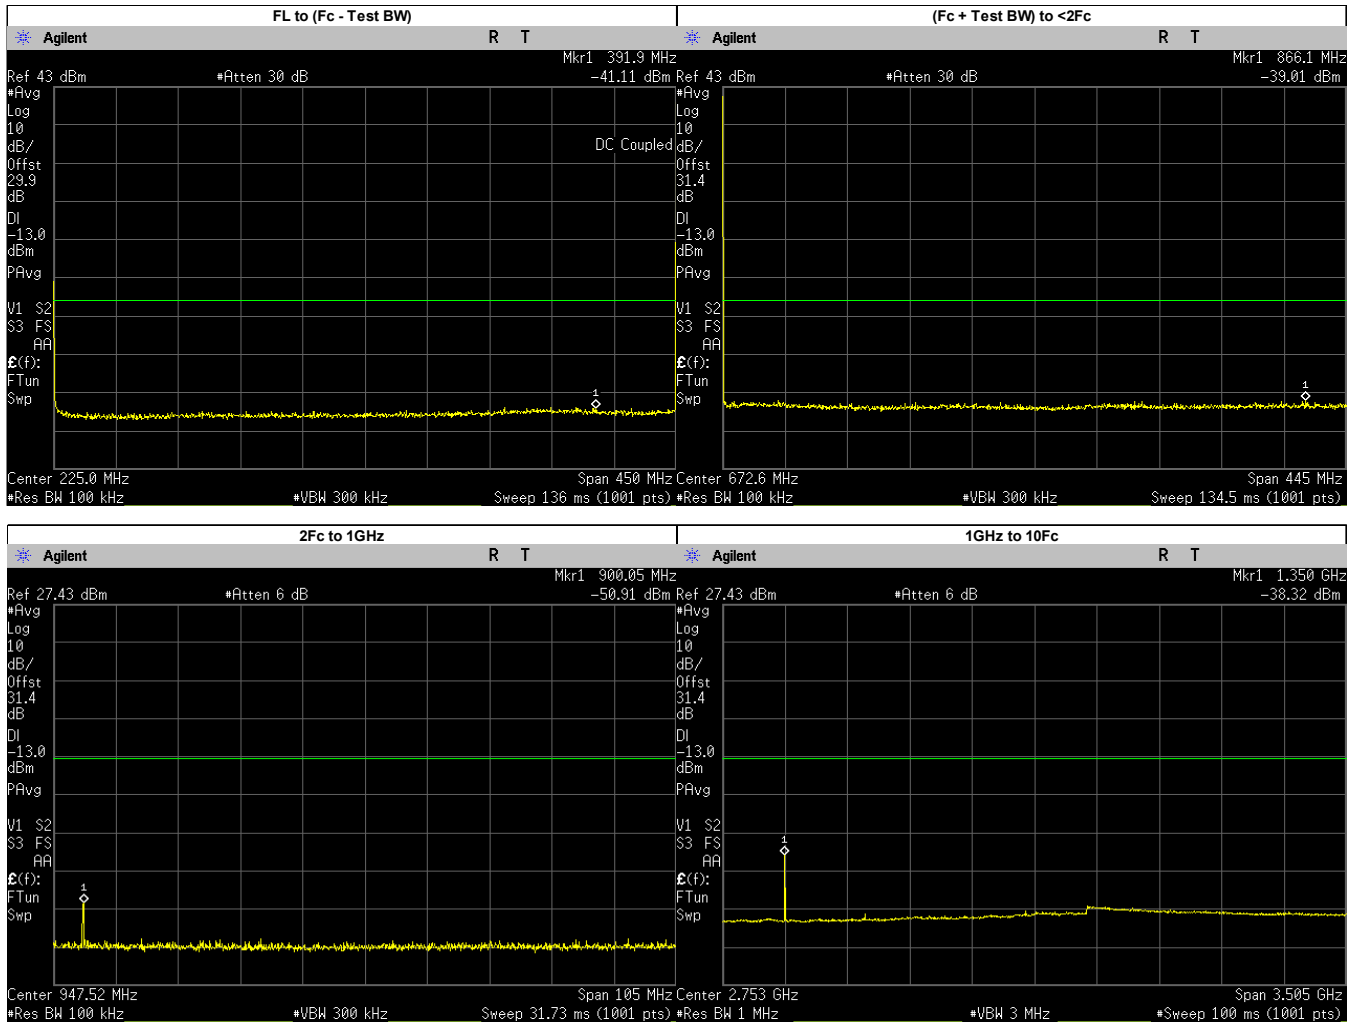



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	391.9000	-41.1130	-13.00	PASS
(Fc + Test BW) to <2Fc	866.1271	-39.0100	-13.00	PASS
2Fc to 1GHz	900.0500	-50.9100	-13.00	PASS
1GHz to 10Fc	1350.0750	-38.3200	-13.00	PASS
	1800.1000	-54.2390	-13.00	PASS
	2250.1250	-54.5601	-13.00	PASS
	2700.1500	-52.9002	-13.00	PASS
	3150.1750	-52.1559	-13.00	PASS
	3600.2000	-53.3743	-13.00	PASS
	4050.2250	-53.9456	-13.00	PASS
	4500.2500	-54.0260	-13.00	PASS

Analog: 450.025. MHz, 25.kHz Channel Spacing, Low. Power
For Part 74

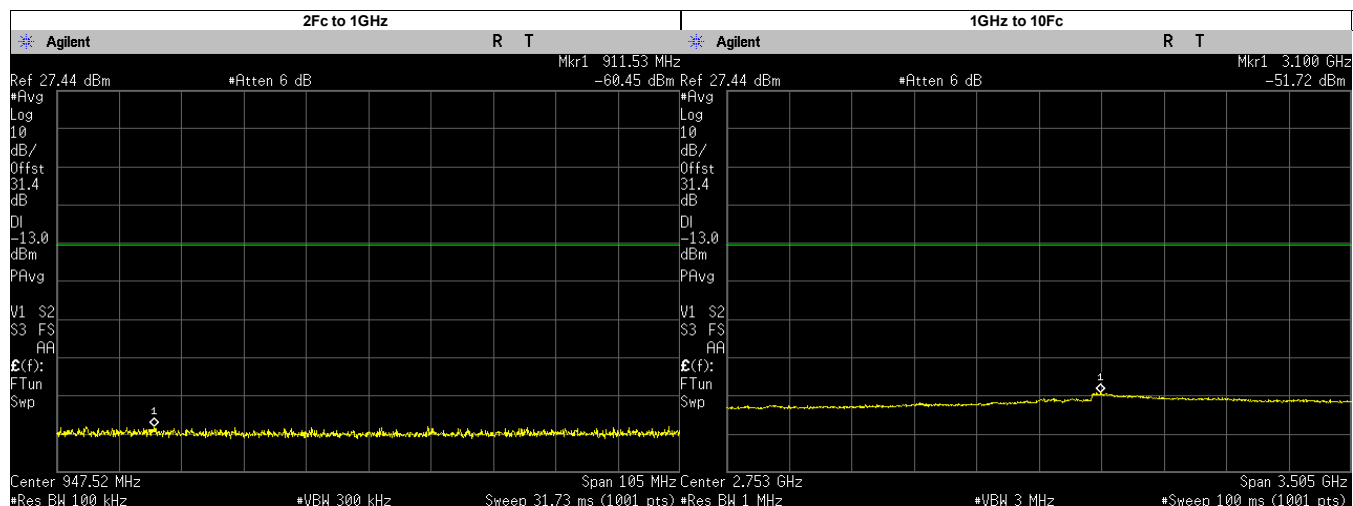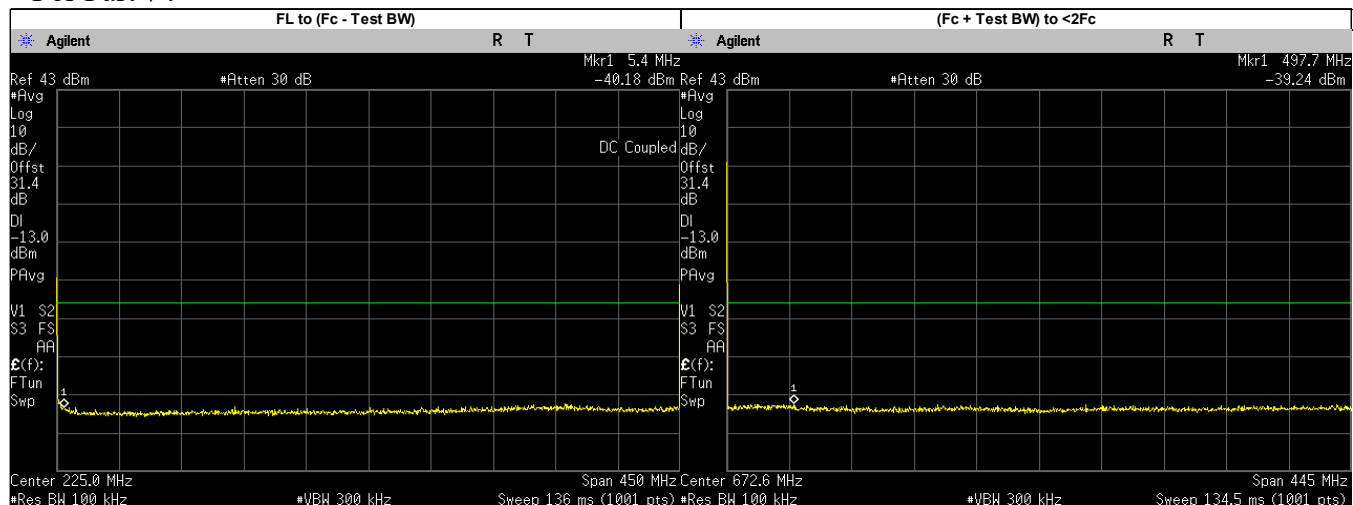



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	5.4000	-40.1790	-13.00	PASS
(Fc + Test BW) to <2Fc	497.6934	-39.2400	-13.00	PASS
2Fc to 1GHz	911.5272	-60.4500	-13.00	PASS
	900.0500	-60.6797	-13.00	PASS
1GHz to 10Fc	3099.6450	-51.7200	-13.00	PASS
	1350.0750	-55.0747	-13.00	PASS
	1800.1000	-55.2147	-13.00	PASS
	2250.1250	-55.0339	-13.00	PASS
	2700.1500	-54.1018	-13.00	PASS
	3150.1750	-52.2950	-13.00	PASS
	3600.2000	-53.4111	-13.00	PASS
	4050.2250	-53.8343	-13.00	PASS
	4500.2500	-54.0220	-13.00	PASS

Analog: 459.125. MHz, 25.kHz Channel Spacing, Max. Power
For Part 22

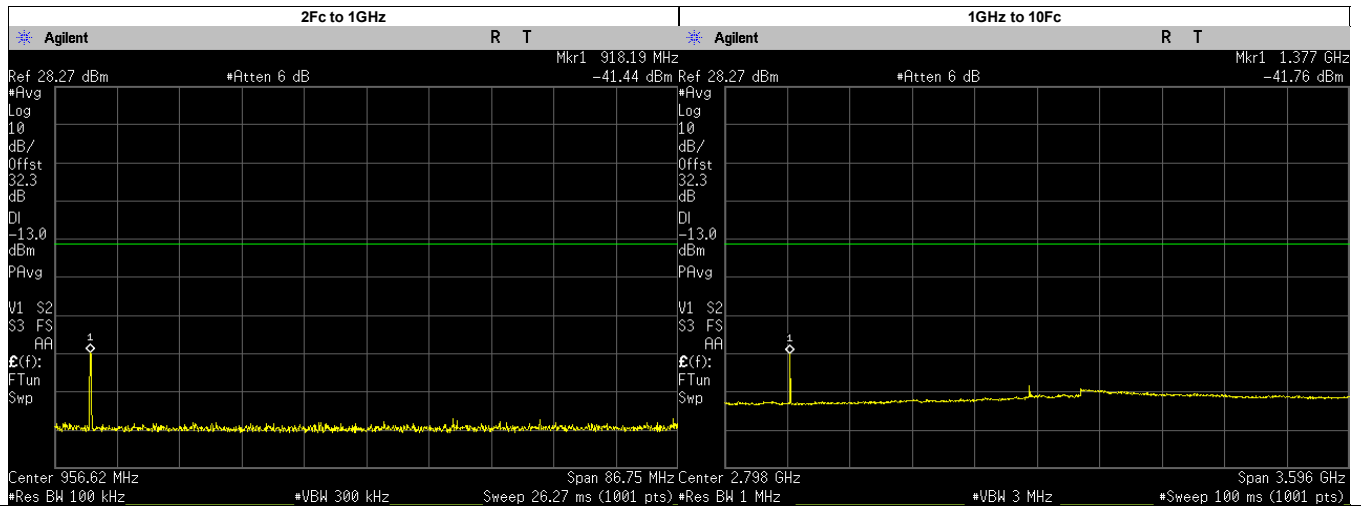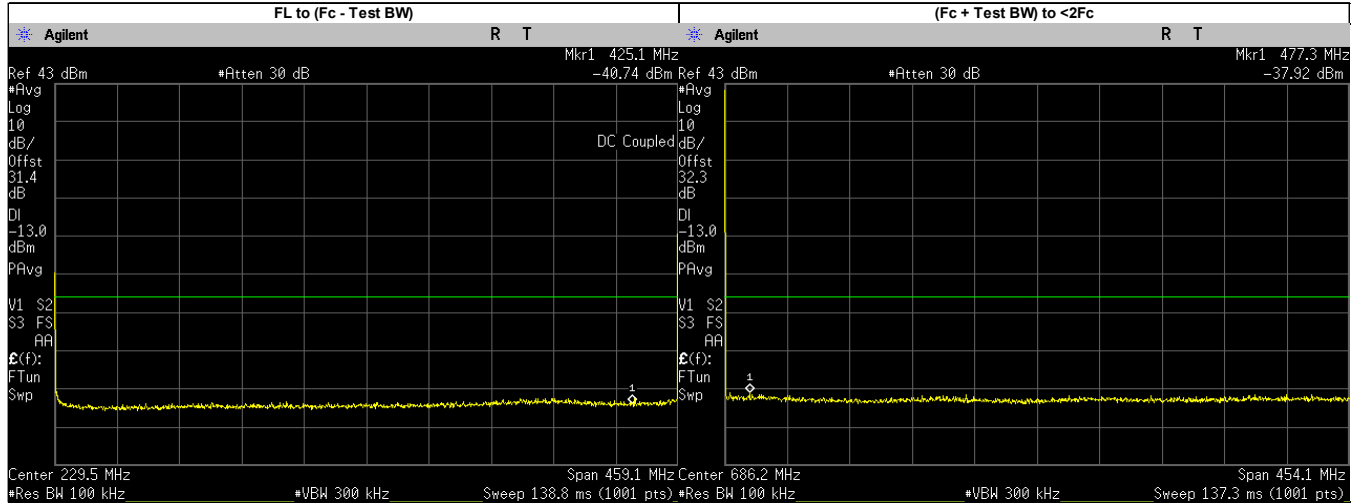



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	425.1000	-40.7390	-13.00	PASS
(Fc + Test BW) to <2Fc	477.3445	-37.9200	-13.00	PASS
2Fc to 1GHz	918.1947	-41.4400	-13.00	PASS
	918.2500	-41.6834	-13.00	PASS
1GHz to 10Fc	1377.3750	-41.7600	-13.00	PASS
	1836.5000	-54.2700	-13.00	PASS
	2295.6250	-53.9174	-13.00	PASS
	2754.7500	-50.1184	-13.00	PASS
	3213.8750	-51.9015	-13.00	PASS
	3673.0000	-52.6395	-13.00	PASS
	4132.1250	-52.7620	-13.00	PASS
	4591.2500	-52.9344	-13.00	PASS

Analog: 459.125. MHz, 25.kHz Channel Spacing, Low. Power
For Part 22

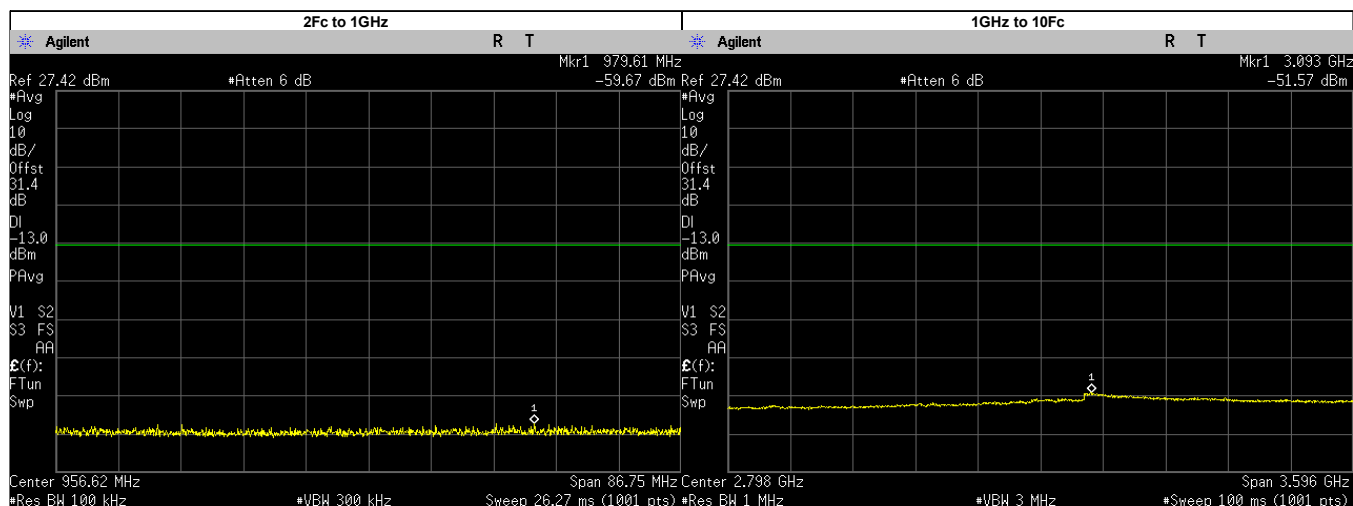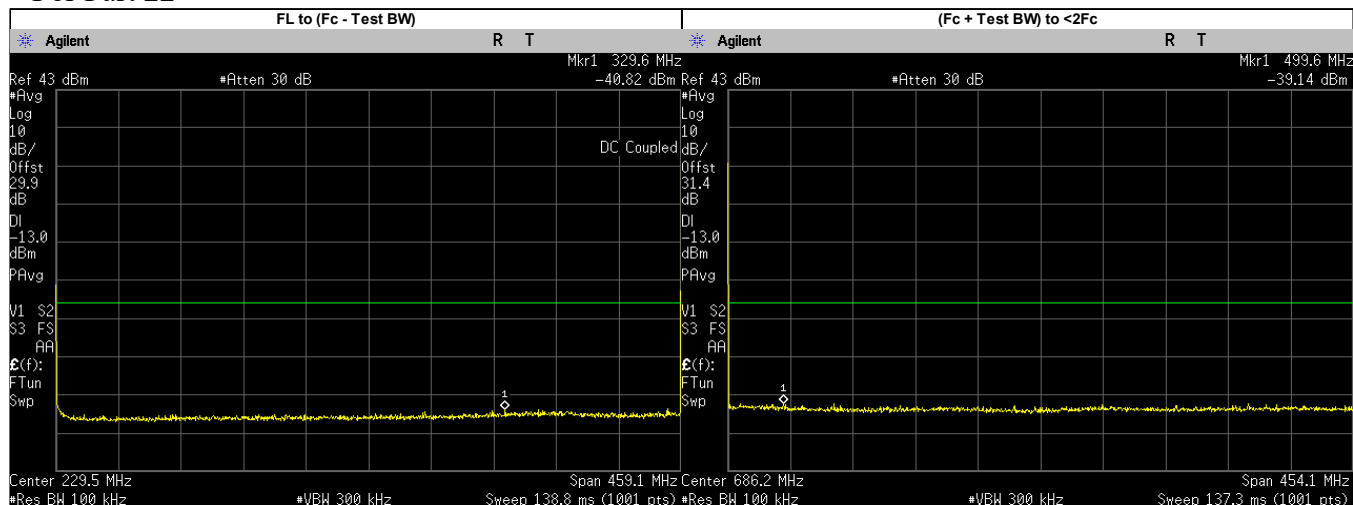



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	329.6000	-40.8210	-13.00	PASS
(Fc + Test BW) to <2Fc	499.5939	-39.1400	-13.00	PASS
2Fc to 1GHz	979.6137	-59.6700	-13.00	PASS
	918.2500	-61.3277	-13.00	PASS
1GHz to 10Fc	3093.0170	-51.5700	-13.00	PASS
	1377.3750	-55.5910	-13.00	PASS
	1836.5000	-55.3952	-13.00	PASS
	2295.6250	-54.9671	-13.00	PASS
	2754.7500	-53.8581	-13.00	PASS
	3213.8750	-52.7024	-13.00	PASS
	3673.0000	-53.2789	-13.00	PASS
	4132.1250	-53.6834	-13.00	PASS
	4591.2500	-53.9424	-13.00	PASS

Analog: 467.775. MHz, 25.kHz Channel Spacing, Max. Power
For Part 80

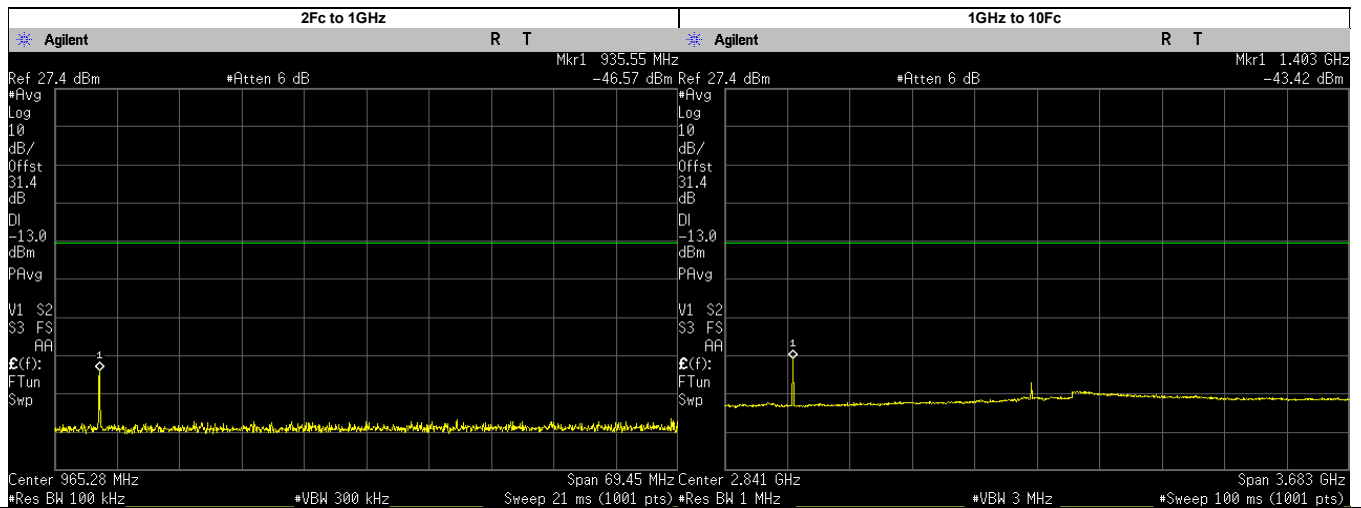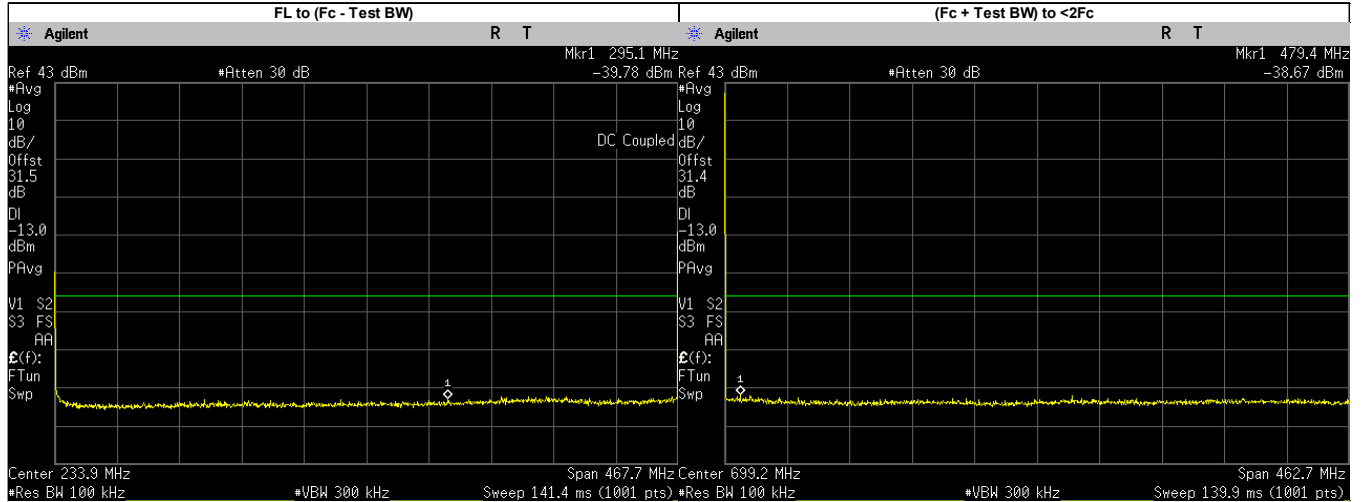



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	295.1000	-39.7800	-13.00	PASS
(Fc + Test BW) to <2Fc	479.3998	-38.6700	-13.00	PASS
2Fc to 1GHz	935.5500	-46.5700	-13.00	PASS
1GHz to 10Fc	1403.3250	-43.4200	-13.00	PASS
	1871.1000	-55.3331	-13.00	PASS
	2338.8750	-54.6696	-13.00	PASS
	2806.6500	-50.5220	-13.00	PASS
	3274.4250	-52.6095	-13.00	PASS
	3742.2000	-53.4303	-13.00	PASS
	4209.9750	-53.6268	-13.00	PASS
	4677.7500	-54.0966	-13.00	PASS

Analog: 467.775. MHz, 25.kHz Channel Spacing, Low. Power
For Part 80

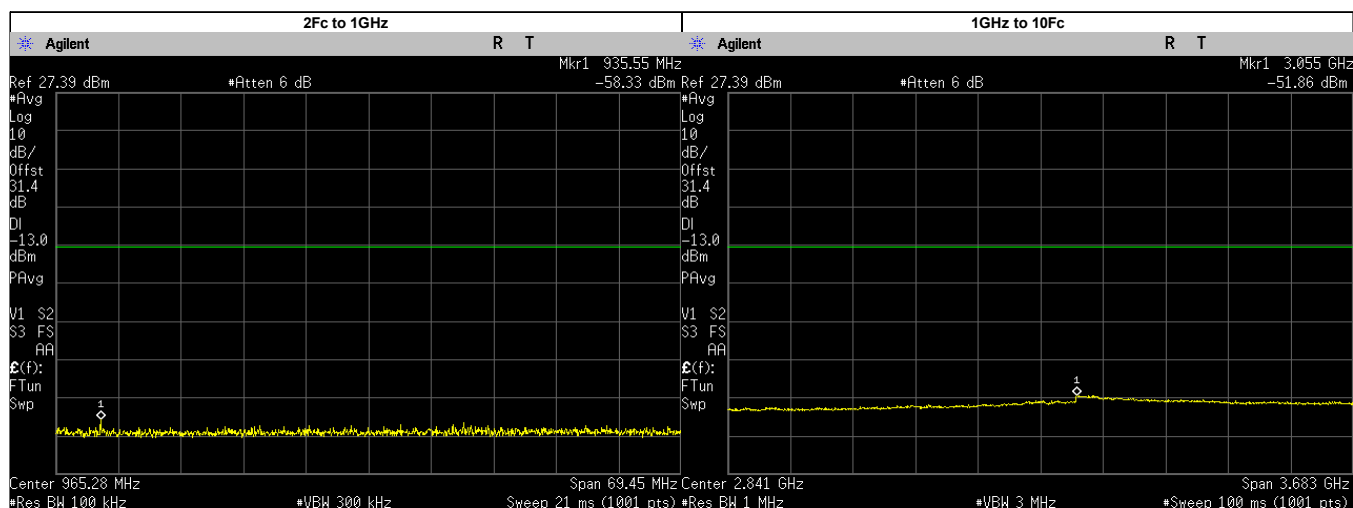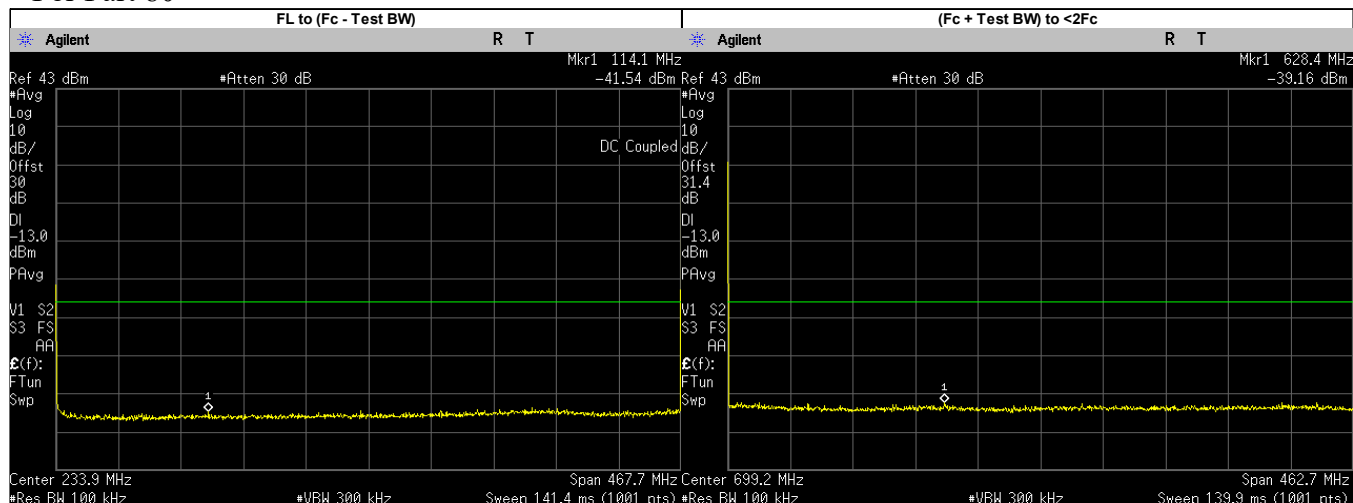



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	114.1000	-41.5370	-13.00	PASS
(Fc + Test BW) to <2Fc	628.3950	-39.1600	-13.00	PASS
2Fc to 1GHz	935.5500	-58.3397	-13.00	PASS
1GHz to 10Fc	3054.9740	-51.8600	-13.00	PASS
	1403.3250	-55.3684	-13.00	PASS
	1871.1000	-55.0572	-13.00	PASS
	2338.8750	-54.8135	-13.00	PASS
	2806.6500	-53.8217	-13.00	PASS
	3274.4250	-52.6622	-13.00	PASS
	3742.2000	-53.4620	-13.00	PASS
	4209.9750	-53.7447	-13.00	PASS
	4677.7500	-54.1108	-13.00	PASS

Analog: 482.0125. MHz, 25.kHz Channel Spacing, Max. Power

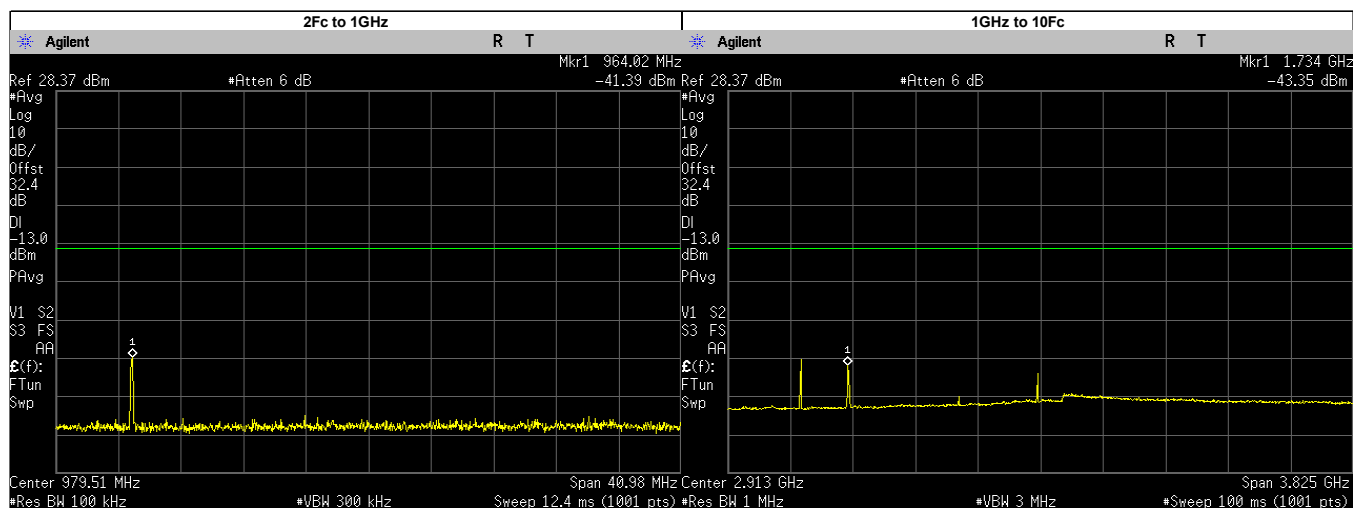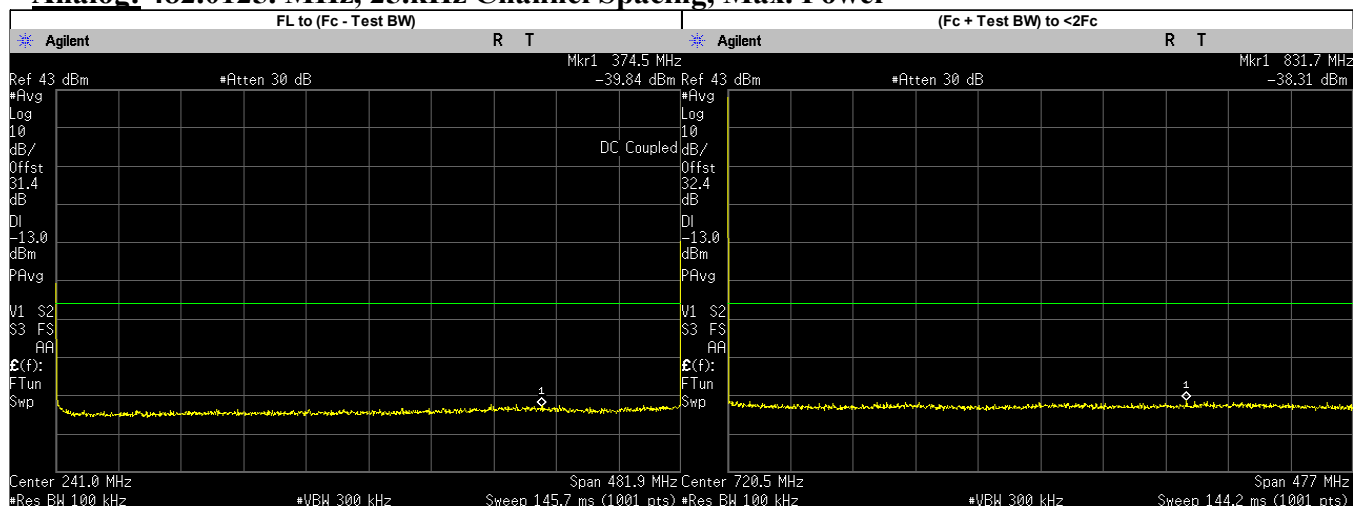



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	374.5000	-39.8360	-13.00	PASS
(Fc + Test BW) to <2Fc	831.6778	-38.3100	-13.00	PASS
2Fc to 1GHz	964.0250	-41.3900	-13.00	PASS
1GHz to 10Fc	1734.4240	-43.3500	-13.00	PASS
	1446.0370	-44.1665	-13.00	PASS
	1928.0500	-54.3585	-13.00	PASS
	2410.0620	-52.3485	-13.00	PASS
	2892.0750	-47.6221	-13.00	PASS
	3374.0880	-52.1297	-13.00	PASS
	3856.1000	-52.6438	-13.00	PASS
	4338.1130	-52.9805	-13.00	PASS
	4820.1250	-53.4367	-13.00	PASS

Analog: 482.0125. MHz, 25.kHz Channel Spacing, Low. Power

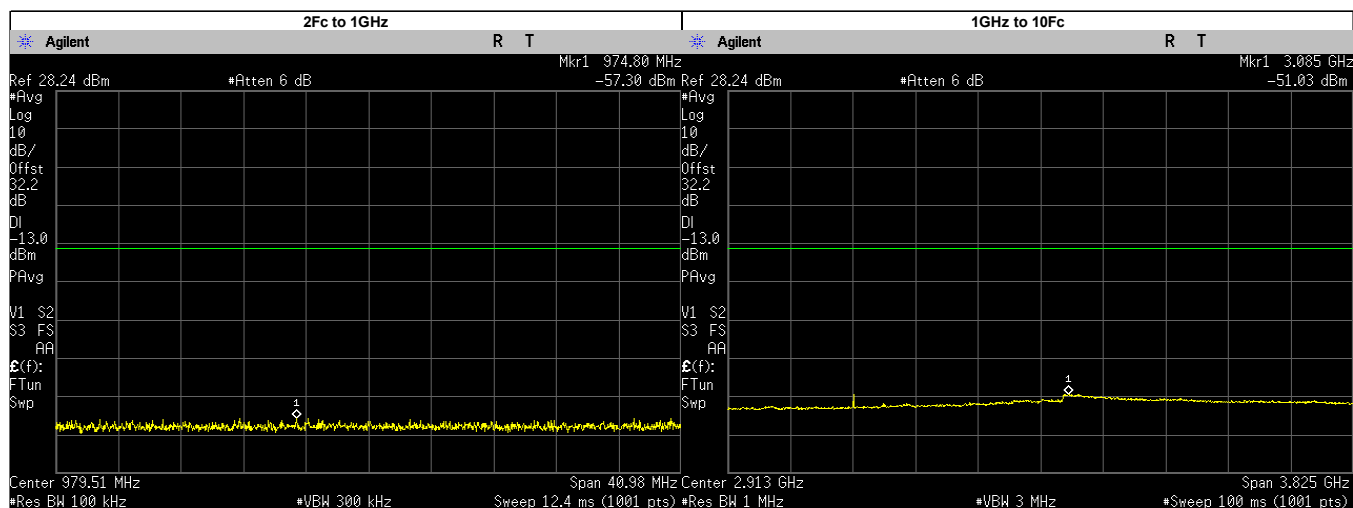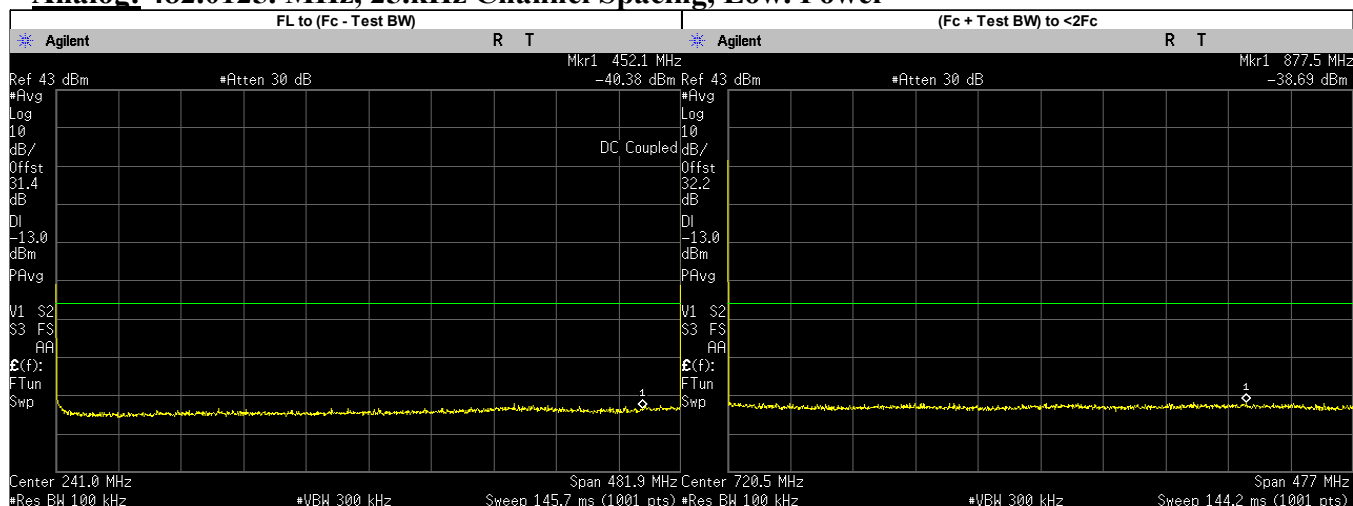



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	452.1000	-40.3790	-13.00	PASS
(Fc + Test BW) to <2Fc	877.4656	-38.6900	-13.00	PASS
2Fc to 1GHz	974.8004	-57.3000	-13.00	PASS
	964.0250	-57.9435	-13.00	PASS
1GHz to 10Fc	3084.6930	-51.0300	-13.00	PASS
	1446.0370	-54.6855	-13.00	PASS
	1928.0500	-54.5242	-13.00	PASS
	2410.0620	-54.1383	-13.00	PASS
	2892.0750	-53.1835	-13.00	PASS
	3374.0880	-52.2424	-13.00	PASS
	3856.1000	-52.7204	-13.00	PASS
	4338.1130	-53.2259	-13.00	PASS
	4820.1250	-53.5573	-13.00	PASS

Analog: 511.9875. MHz, 25.kHz Channel Spacing, Max. Power

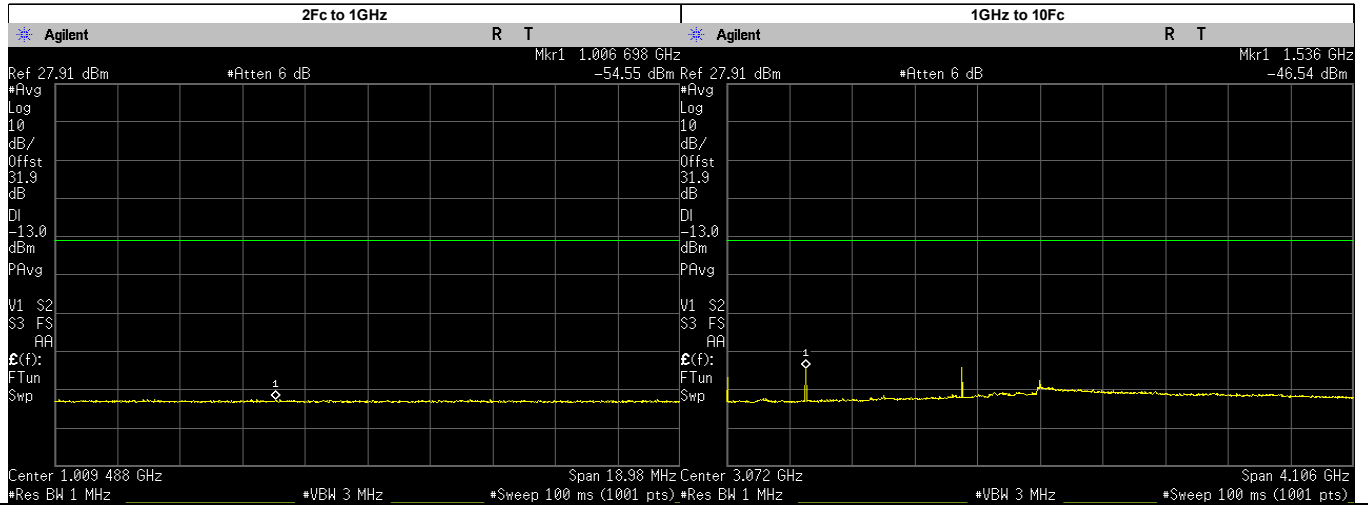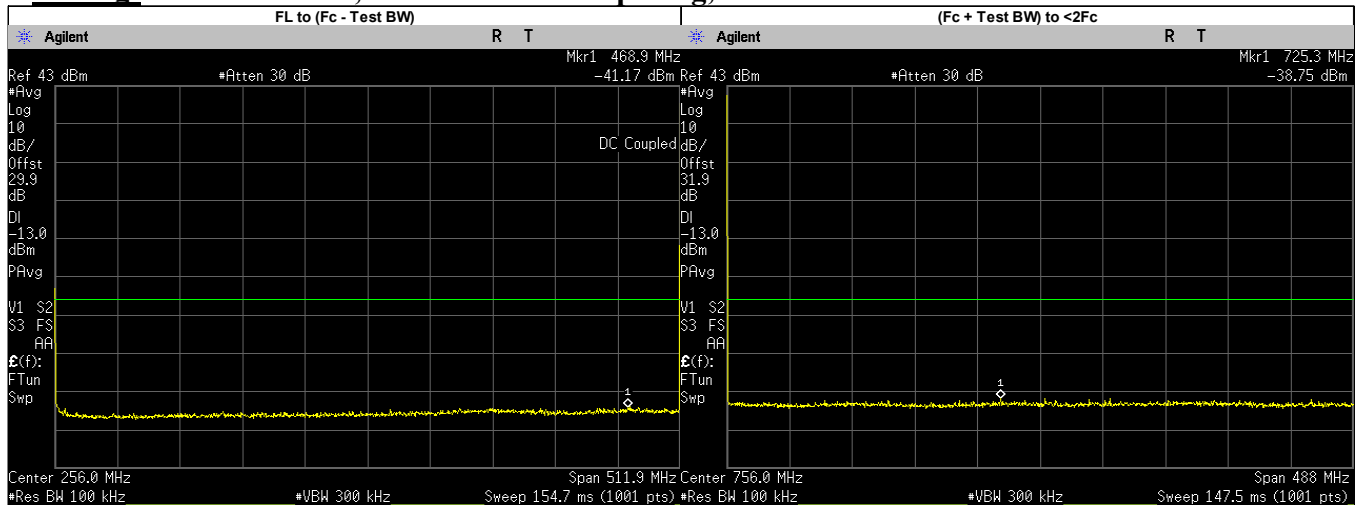



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	468.9000	-41.1720	-13.00	PASS
(Fc + Test BW) to <2Fc	725.2809	-38.7500	-13.00	PASS
2Fc to 1GHz	1006.6980	-54.5500	-13.00	PASS
1GHz to 10Fc	1536.0000	-46.5400	-13.00	PASS
	1023.9750	-50.2923	-13.00	PASS
	2047.9500	-53.7317	-13.00	PASS
	2559.9370	-48.5127	-13.00	PASS
	3071.9250	-49.5870	-13.00	PASS
	3583.9120	-52.7857	-13.00	PASS
	4095.9000	-53.3921	-13.00	PASS
	4607.8870	-53.4705	-13.00	PASS
	5119.8750	-54.2155	-13.00	PASS

Analog: 511.9875. MHz, 25.kHz Channel Spacing, Low. Power

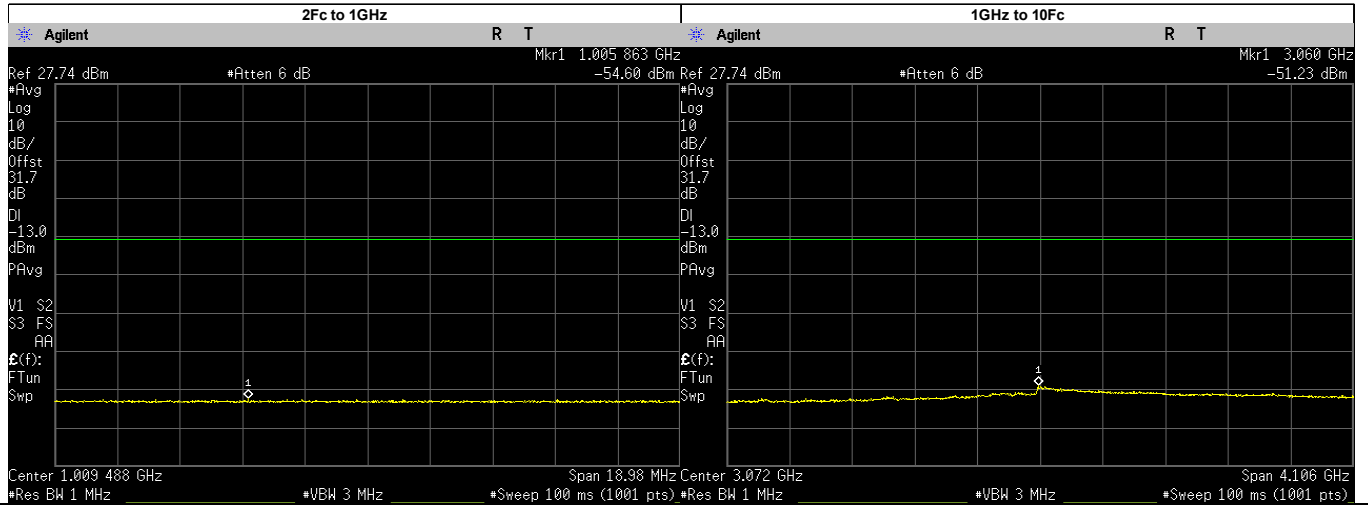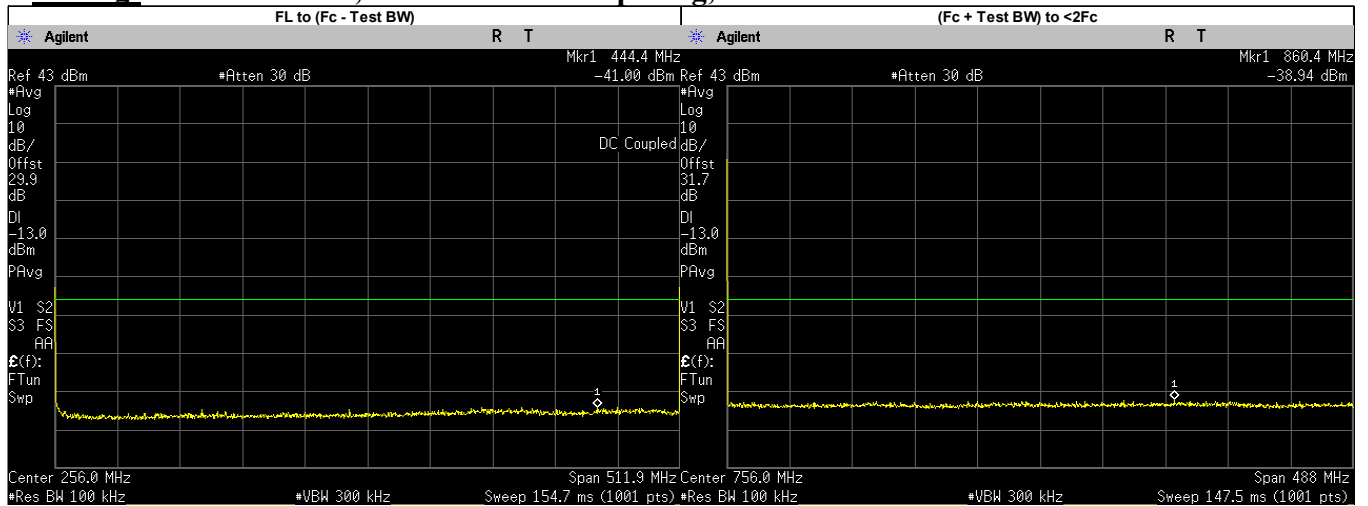



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	444.4000	-41.0000	-13.00	PASS
(Fc + Test BW) to <2Fc	860.4447	-38.9400	-13.00	PASS
2Fc to 1GHz	1005.8630	-54.6000	-13.00	PASS
1GHz to 10Fc	3059.6070	-51.2300	-13.00	PASS
	1023.9750	-55.3943	-13.00	PASS
	1535.9630	-54.6247	-13.00	PASS
	2047.9500	-54.3959	-13.00	PASS
	2559.9370	-54.2307	-13.00	PASS
	3071.9250	-51.9140	-13.00	PASS
	3583.9120	-53.1412	-13.00	PASS
	4095.9000	-53.4864	-13.00	PASS
	4607.8870	-53.5280	-13.00	PASS
	5119.8750	-53.8965	-13.00	PASS

Analog: 526.9875. MHz, 25.kHz Channel Spacing, Max. Power
 Not for FCC review

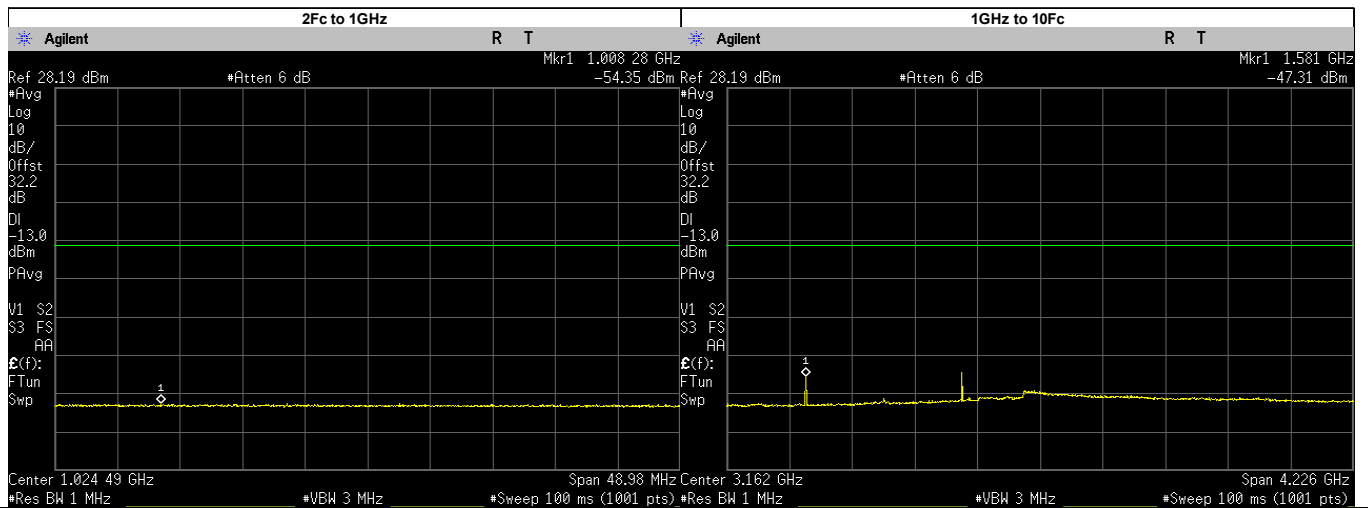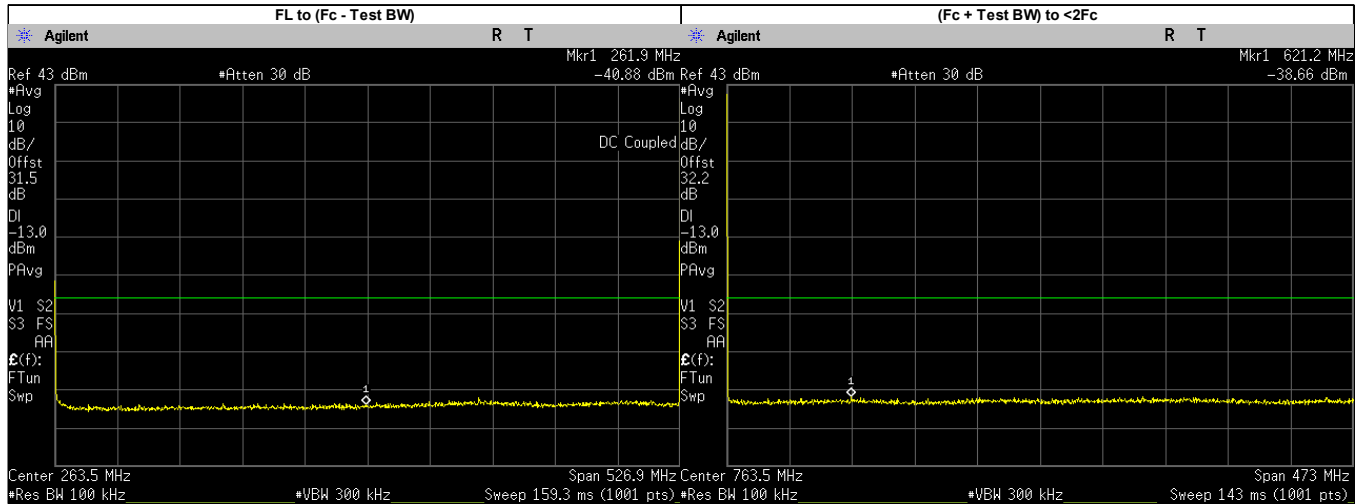

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	261.9000	-40.8800	-13.00	PASS
(Fc + Test BW) to <2Fc	621.1625	-38.6600	-13.00	PASS
2Fc to 1GHz	1008.2770	-54.3500	-13.00	PASS
1GHz to 10Fc	1581.0000	-47.3100	-13.00	PASS
	1053.9750	-54.4551	-13.00	PASS
	2107.9500	-53.2396	-13.00	PASS
	2634.9370	-48.3333	-13.00	PASS
	3161.9250	-51.0890	-13.00	PASS
	3688.9120	-52.5749	-13.00	PASS
	4215.9000	-53.0913	-13.00	PASS
	4742.8870	-53.3308	-13.00	PASS
	5269.8750	-53.8031	-13.00	PASS


Analog: 526.9875. MHz, 25.kHz Channel Spacing, Low. Power
Not for FCC review

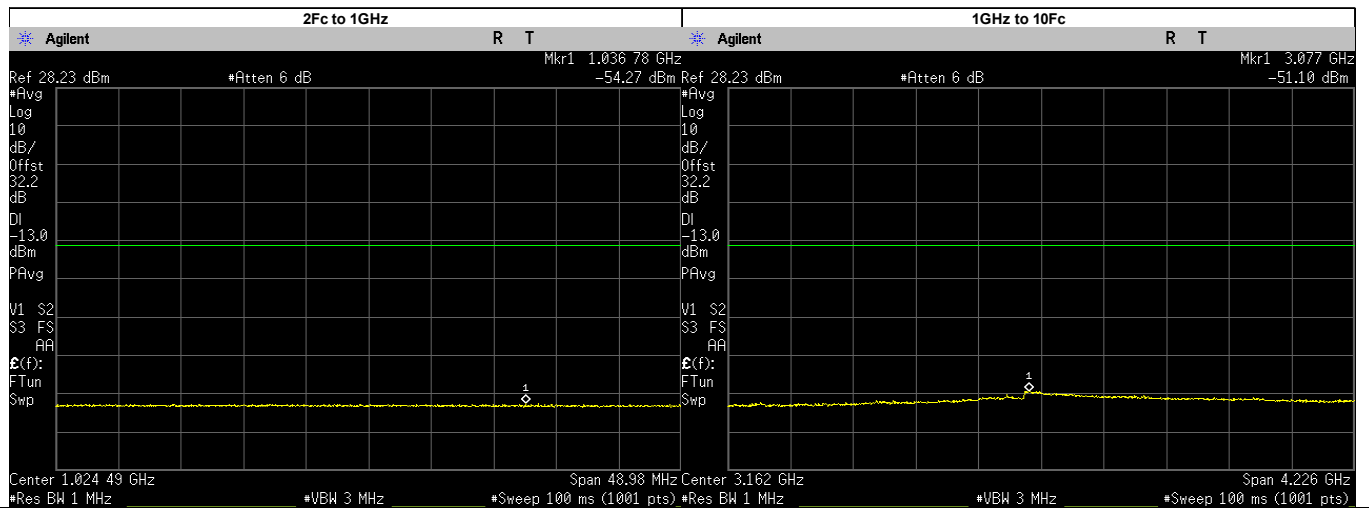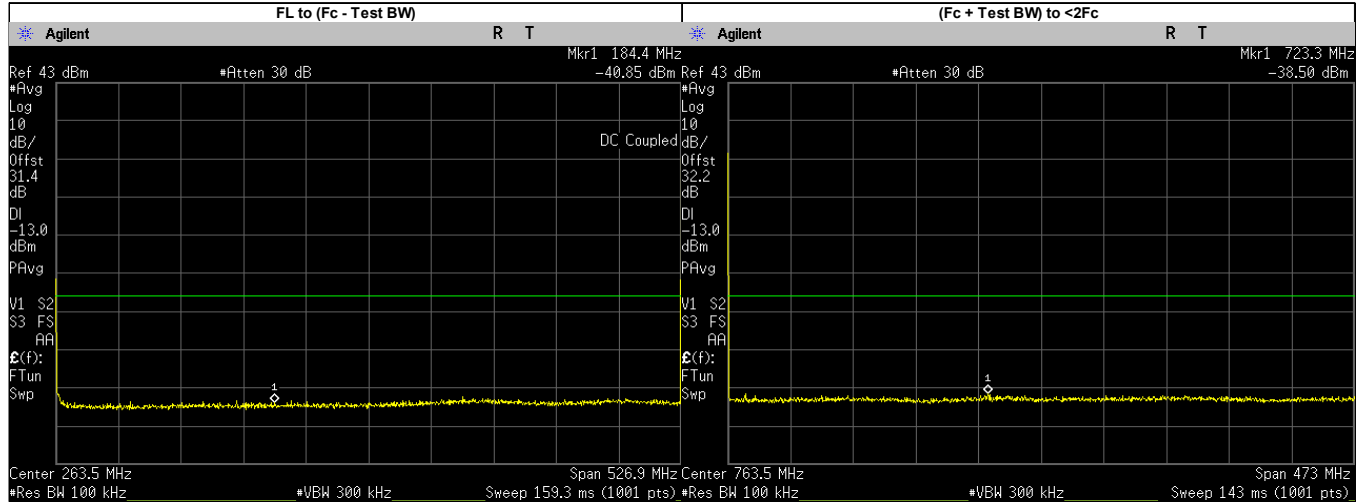

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	184.4000	-40.8520	-13.00	PASS
(Fc + Test BW) to <2Fc	723.3209	-38.5000	-13.00	PASS
2Fc to 1GHz	1036.7800	-54.2700	-13.00	PASS
1GHz to 10Fc	3077.4070	-51.1000	-13.00	PASS
	1053.9750	-54.7257	-13.00	PASS
	1580.9630	-54.6119	-13.00	PASS
	2107.9500	-53.7926	-13.00	PASS
	2634.9370	-53.2513	-13.00	PASS
	3161.9250	-51.4050	-13.00	PASS
	3688.9120	-52.5941	-13.00	PASS
	4215.9000	-52.9961	-13.00	PASS
	4742.8870	-53.6720	-13.00	PASS
	5269.8750	-53.8065	-13.00	PASS



6.9.3. Test Result (Digital)

Digital.: 450.025. MHz, 12.5 kHz Channel Spacing, Max. Power

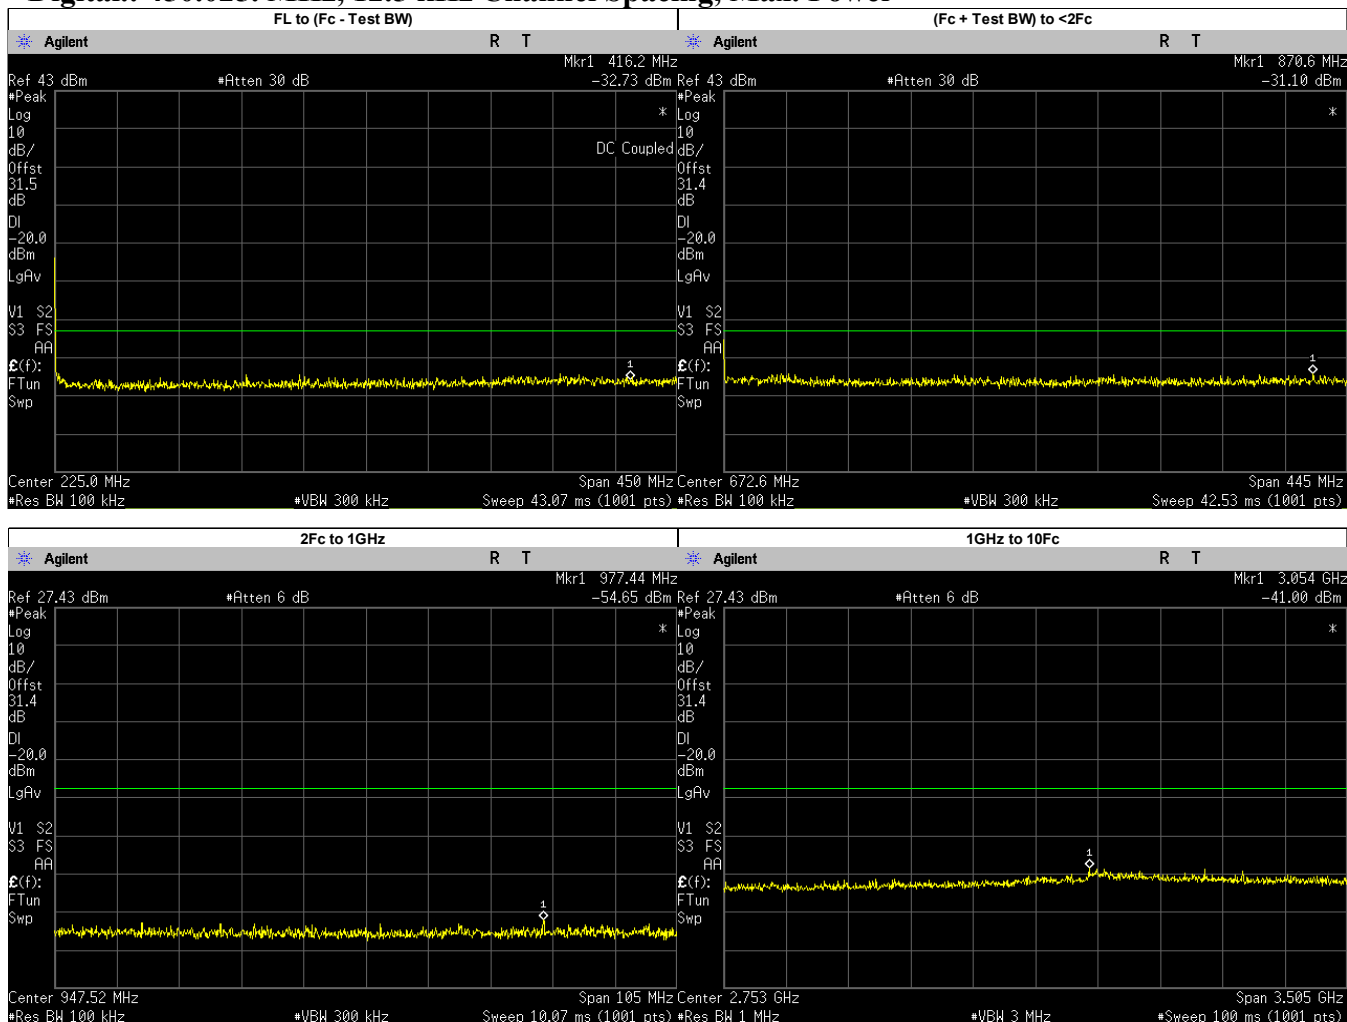



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	416.2000	-32.7290	-20.00	PASS
(Fc + Test BW) to <2Fc	870.5767	-31.1000	-20.00	PASS
2Fc to 1GHz	977.4357	-54.6500	-20.00	PASS
	900.0500	-57.9552	-20.00	PASS
1GHz to 10Fc	3054.0770	-41.0000	-20.00	PASS
	1350.0750	-45.5891	-20.00	PASS
	1800.1000	-46.5203	-20.00	PASS
	2250.1250	-46.0439	-20.00	PASS
	2700.1500	-43.6310	-20.00	PASS
	3150.1750	-42.1770	-20.00	PASS
	3600.2000	-44.0899	-20.00	PASS
	4050.2250	-43.5976	-20.00	PASS
	4500.2500	-44.5195	-20.00	PASS

Digital.: 450.025. MHz, 12.5 kHz Channel Spacing, Max. Power

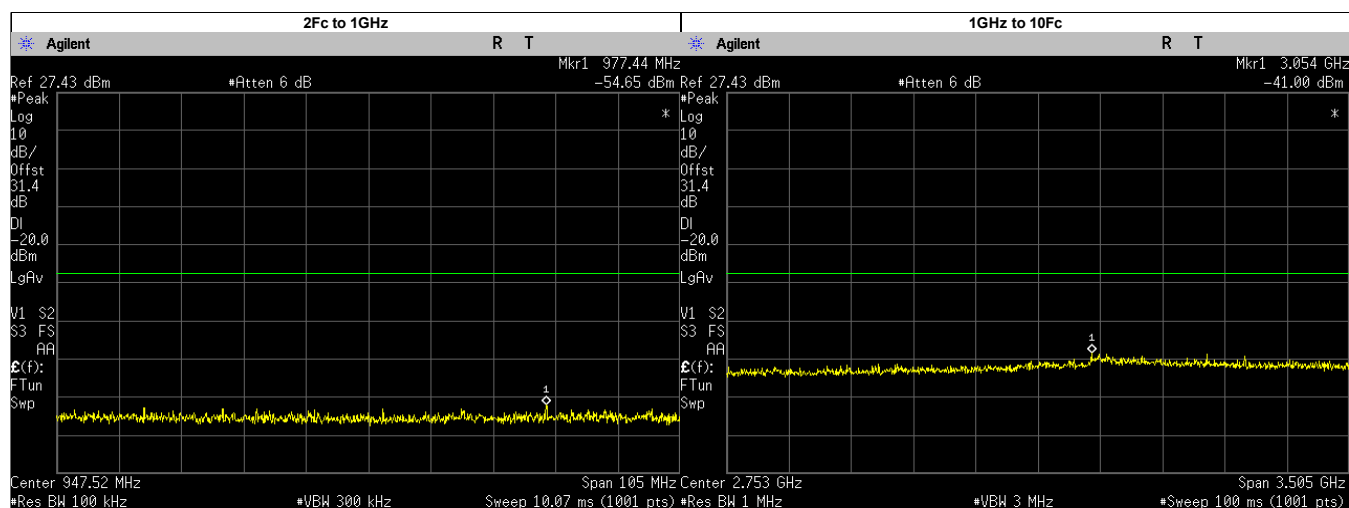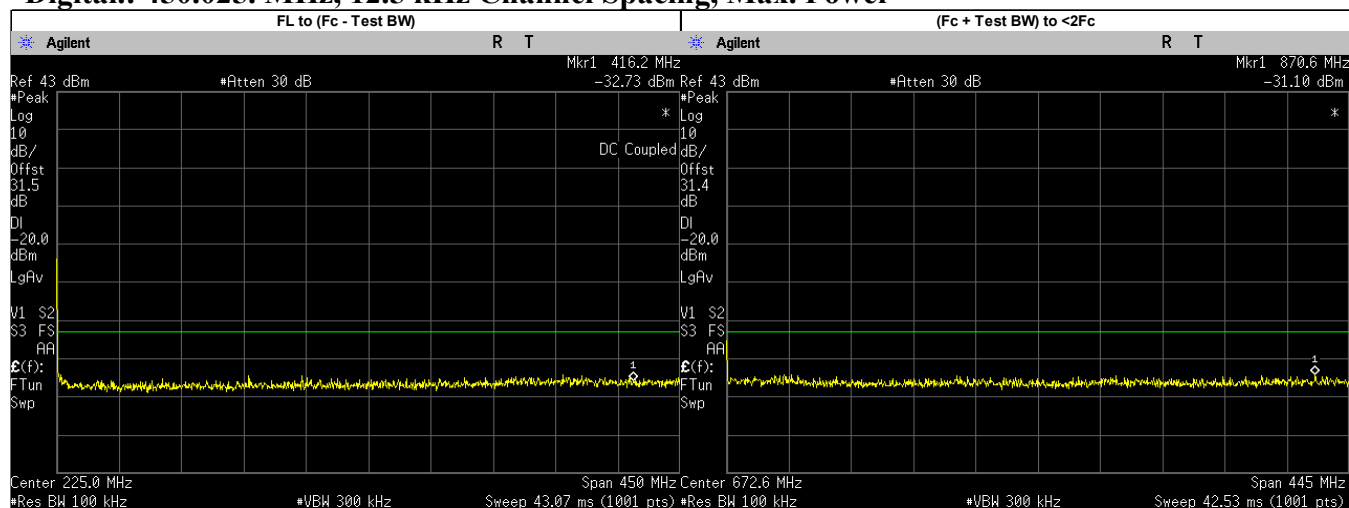



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	416.2000	-32.7290	-20.00	PASS
(Fc + Test BW) to <2Fc	870.5767	-31.1000	-20.00	PASS
2Fc to 1GHz	977.4357	-54.6500	-20.00	PASS
	900.0500	-57.9552	-20.00	PASS
1GHz to 10Fc	3054.0770	-41.0000	-20.00	PASS
	1350.0750	-45.5891	-20.00	PASS
	1800.1000	-46.5203	-20.00	PASS
	2250.1250	-46.0439	-20.00	PASS
	2700.1500	-43.6310	-20.00	PASS
	3150.1750	-42.1770	-20.00	PASS
	3600.2000	-44.0899	-20.00	PASS
	4050.2250	-43.5976	-20.00	PASS
	4500.2500	-44.5195	-20.00	PASS

Digital.: 450.025. MHz, 12.5 kHz Channel Spacing, Max. Power

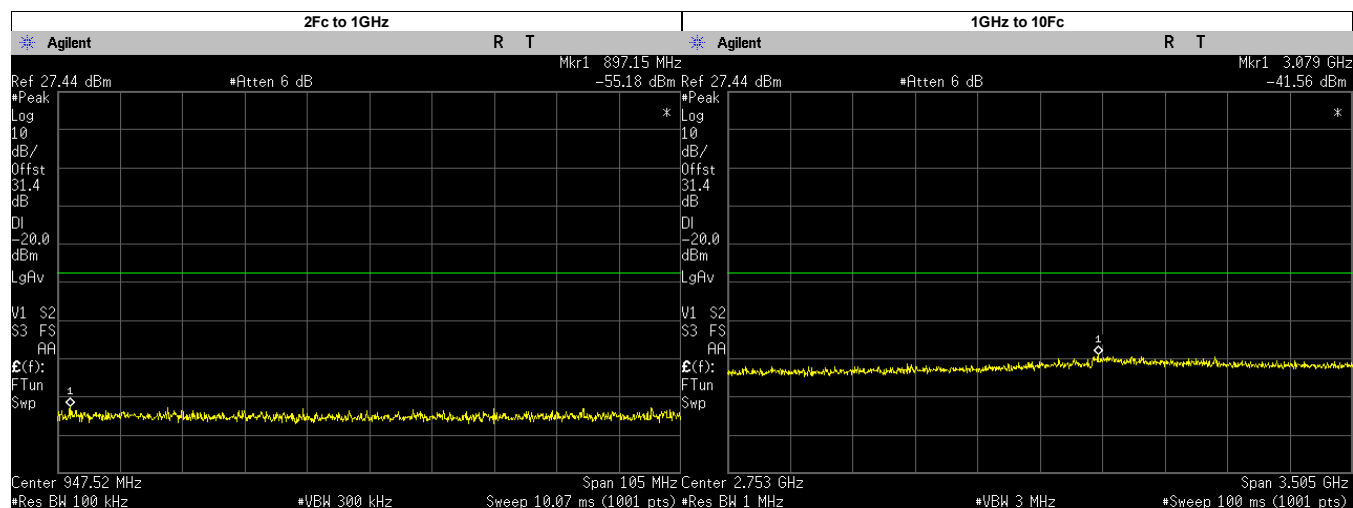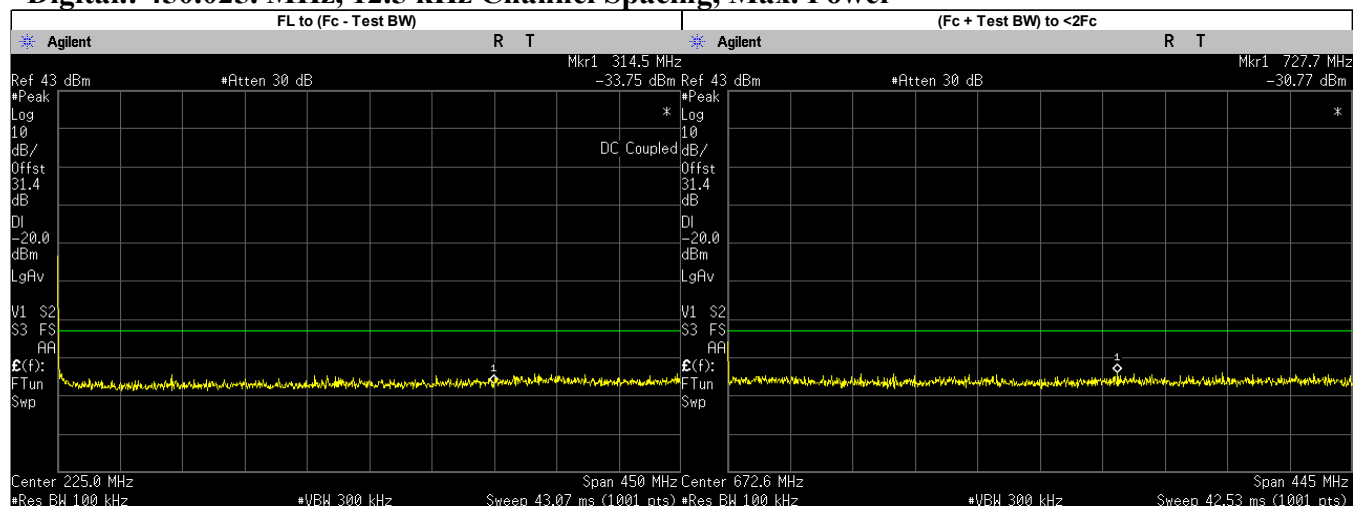



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	314.5000	-33.7490	-20.00	PASS
(Fc + Test BW) to <2Fc	727.7420	-30.7700	-20.00	PASS
2Fc to 1GHz	897.1490	-55.1800	-20.00	PASS
	900.0500	-57.0396	-20.00	PASS
1GHz to 10Fc	3078.6130	-41.5600	-20.00	PASS
	1350.0750	-45.8983	-20.00	PASS
	1800.1000	-45.2976	-20.00	PASS
	2250.1250	-45.2885	-20.00	PASS
	2700.1500	-44.8621	-20.00	PASS
	3150.1750	-42.5618	-20.00	PASS
	3600.2000	-44.3622	-20.00	PASS
	4050.2250	-44.4387	-20.00	PASS
	4500.2500	-43.9454	-20.00	PASS

Digital.: 459.125. MHz, 12.5 kHz Channel Spacing, Max. Power

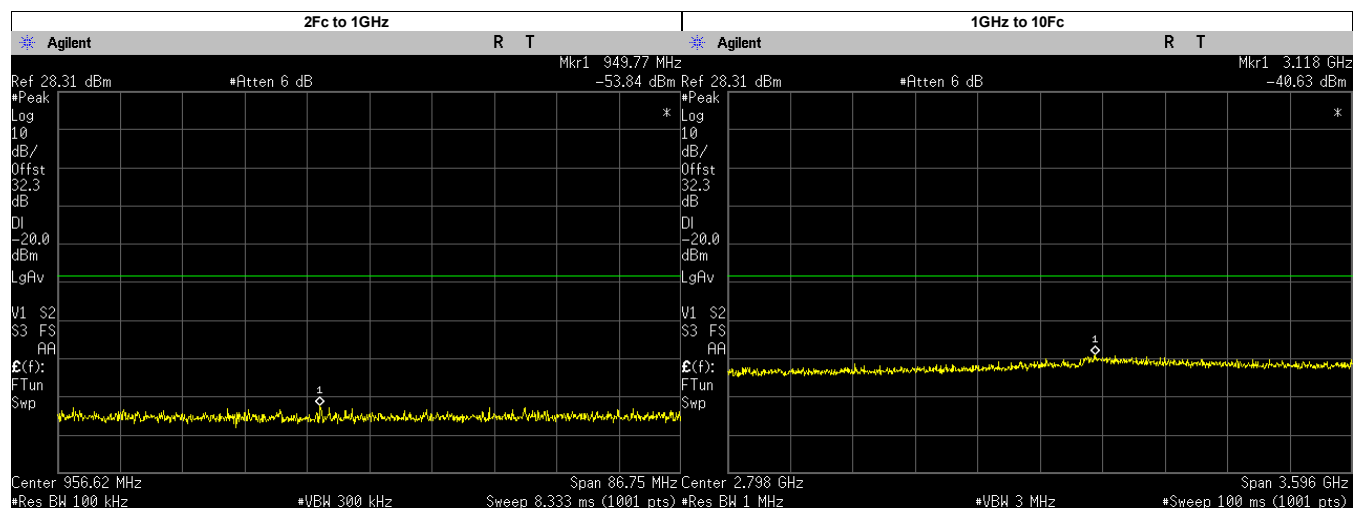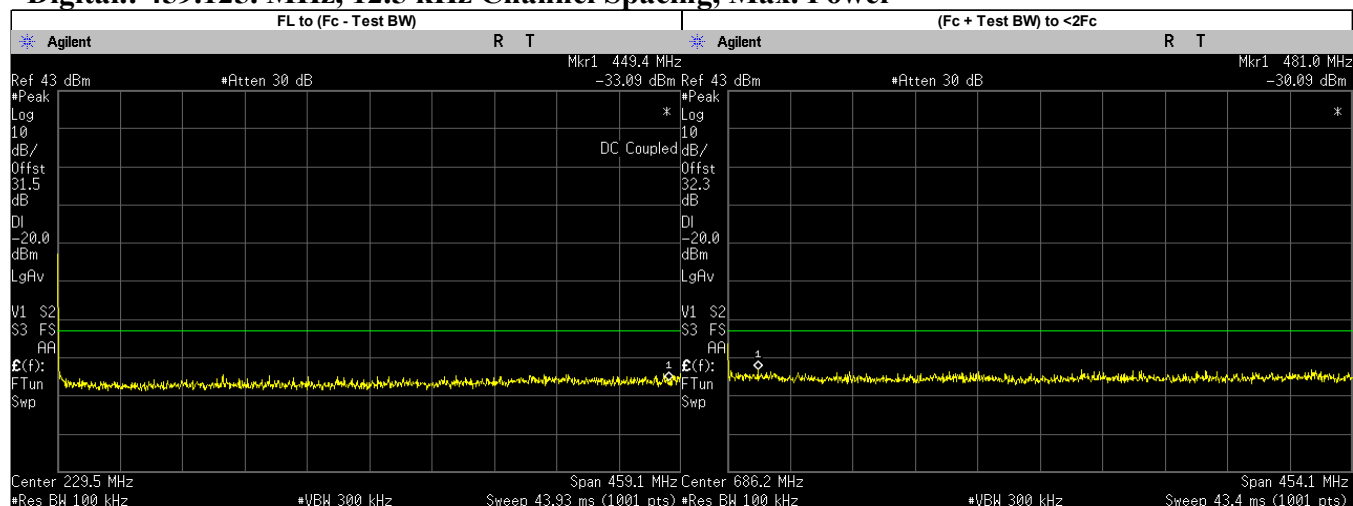



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	449.4000	-33.0920	-20.00	PASS
(Fc + Test BW) to <2Fc	480.9771	-30.0900	-20.00	PASS
2Fc to 1GHz	949.7717	-53.8400	-20.00	PASS
	918.2500	-56.2574	-20.00	PASS
1GHz to 10Fc	3118.1910	-40.6300	-20.00	PASS
	1377.3750	-44.4791	-20.00	PASS
	1836.5000	-45.2147	-20.00	PASS
	2295.6250	-44.9386	-20.00	PASS
	2754.7500	-43.1187	-20.00	PASS
	3213.8750	-42.0558	-20.00	PASS
	3673.0000	-42.6918	-20.00	PASS
	4132.1250	-43.4736	-20.00	PASS
	4591.2500	-42.6213	-20.00	PASS

Digital.: 459.125. MHz, 12.5 kHz Channel Spacing, Low. Power

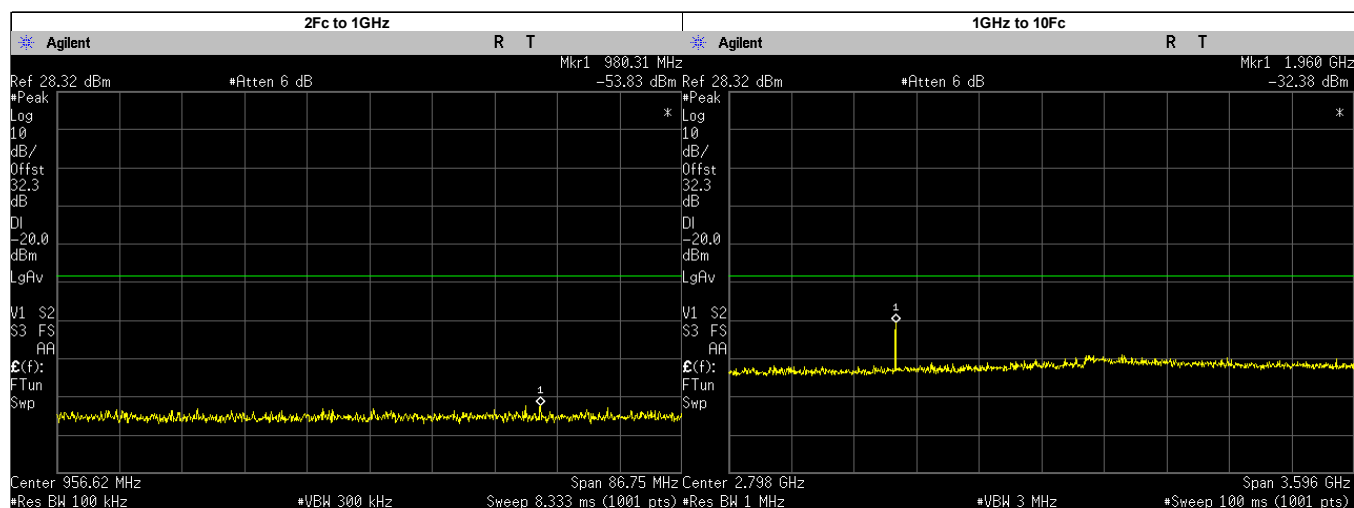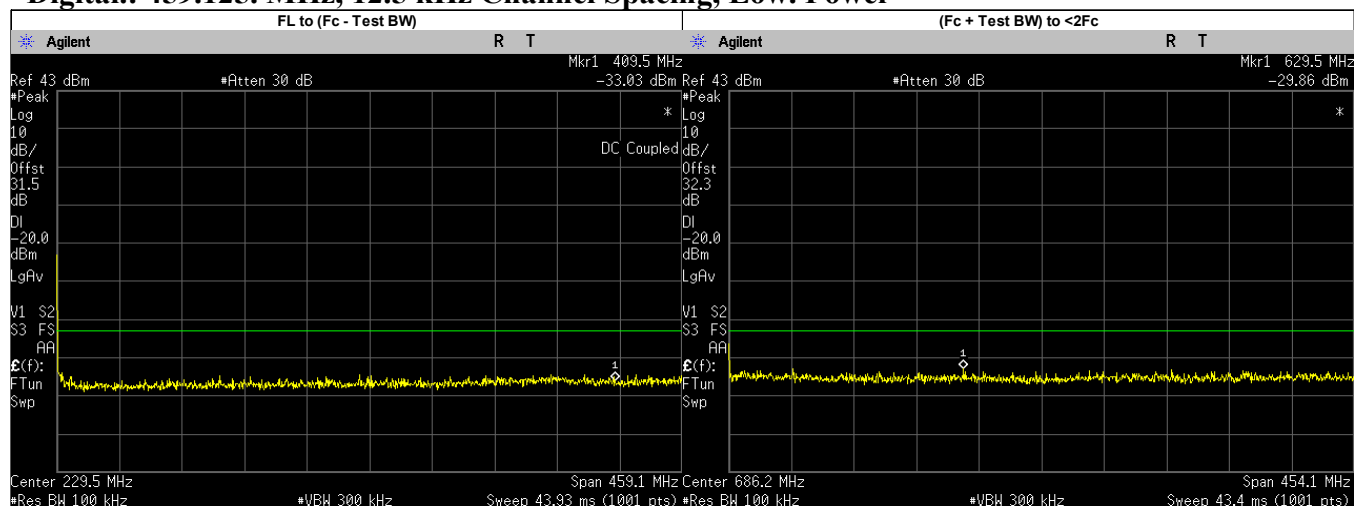



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	409.5000	-33.0300	-20.00	PASS
(Fc + Test BW) to <2Fc	629.4574	-29.8600	-20.00	PASS
2Fc to 1GHz	980.3078	-53.8300	-20.00	PASS
	918.2500	-57.2641	-20.00	PASS
1GHz to 10Fc	1960.0000	-32.3800	-20.00	PASS
	1377.3750	-43.8822	-20.00	PASS
	1836.5000	-44.2627	-20.00	PASS
	2295.6250	-44.6276	-20.00	PASS
	2754.7500	-43.3591	-20.00	PASS
	3213.8750	-42.5317	-20.00	PASS
	3673.0000	-42.8946	-20.00	PASS
	4132.1250	-43.1796	-20.00	PASS
	4591.2500	-43.7523	-20.00	PASS

Digital.: 467.775. MHz, 12.5 kHz Channel Spacing, Max. Power

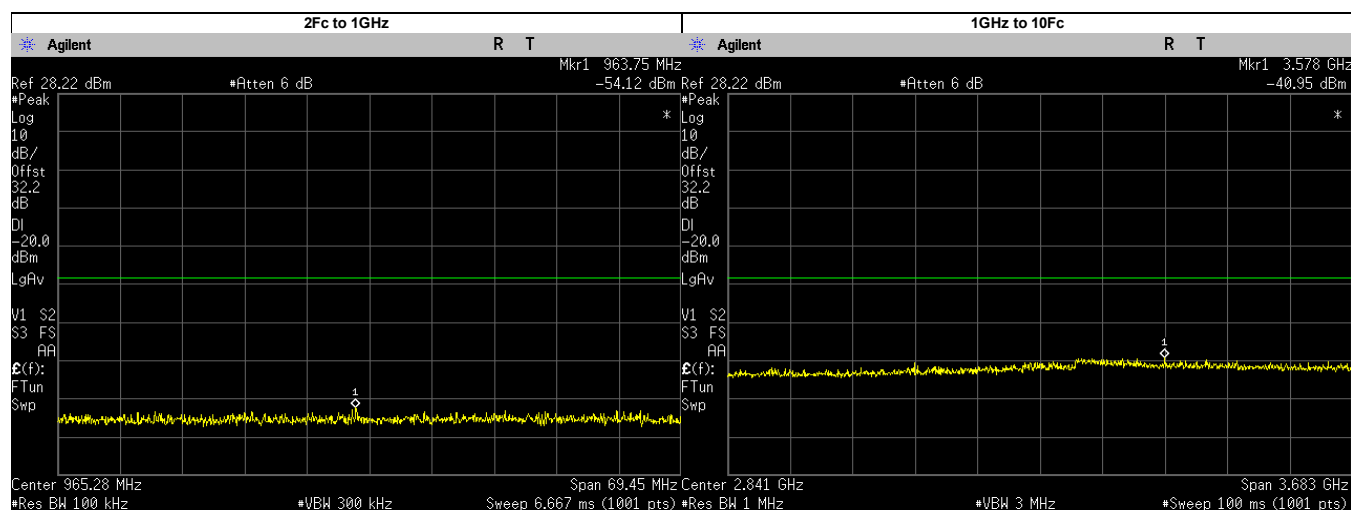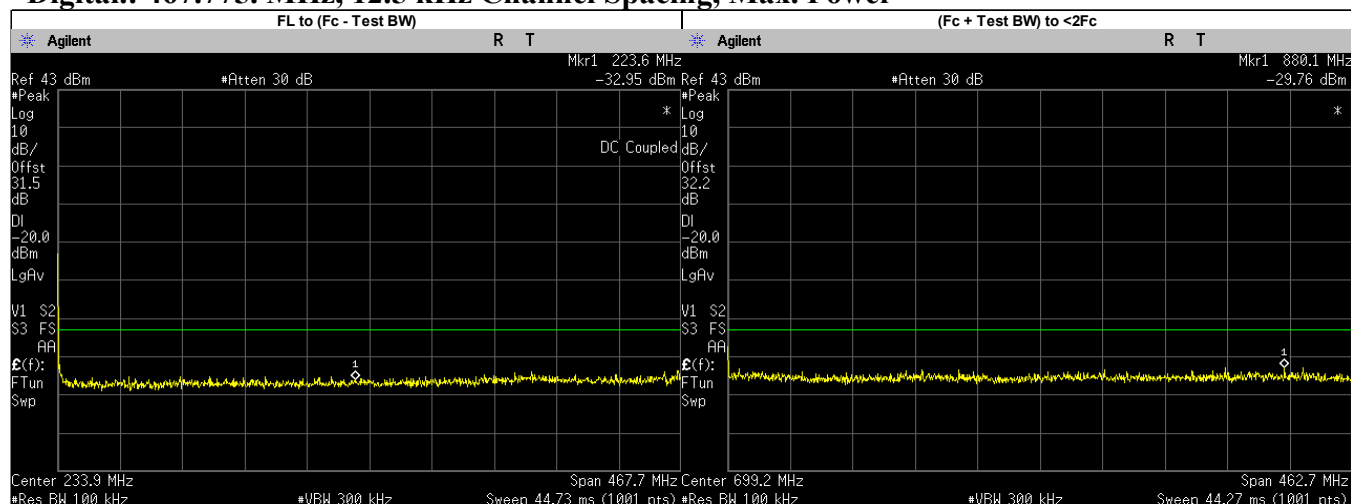



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	223.6000	-32.9530	-20.00	PASS
(Fc + Test BW) to <2Fc	880.1137	-29.7600	-20.00	PASS
2Fc to 1GHz	963.7471	-54.1200	-20.00	PASS
	935.5500	-56.4353	-20.00	PASS
1GHz to 10Fc	3577.9250	-40.9500	-20.00	PASS
	1403.3250	-45.1852	-20.00	PASS
	1871.1000	-45.4088	-20.00	PASS
	2338.8750	-44.8501	-20.00	PASS
	2806.6500	-43.1979	-20.00	PASS
	3274.4250	-42.4149	-20.00	PASS
	3742.2000	-43.3443	-20.00	PASS
	4209.9750	-42.9199	-20.00	PASS
	4677.7500	-43.7480	-20.00	PASS

Digital.: 467.775. MHz, 12.5 kHz Channel Spacing, Low. Power

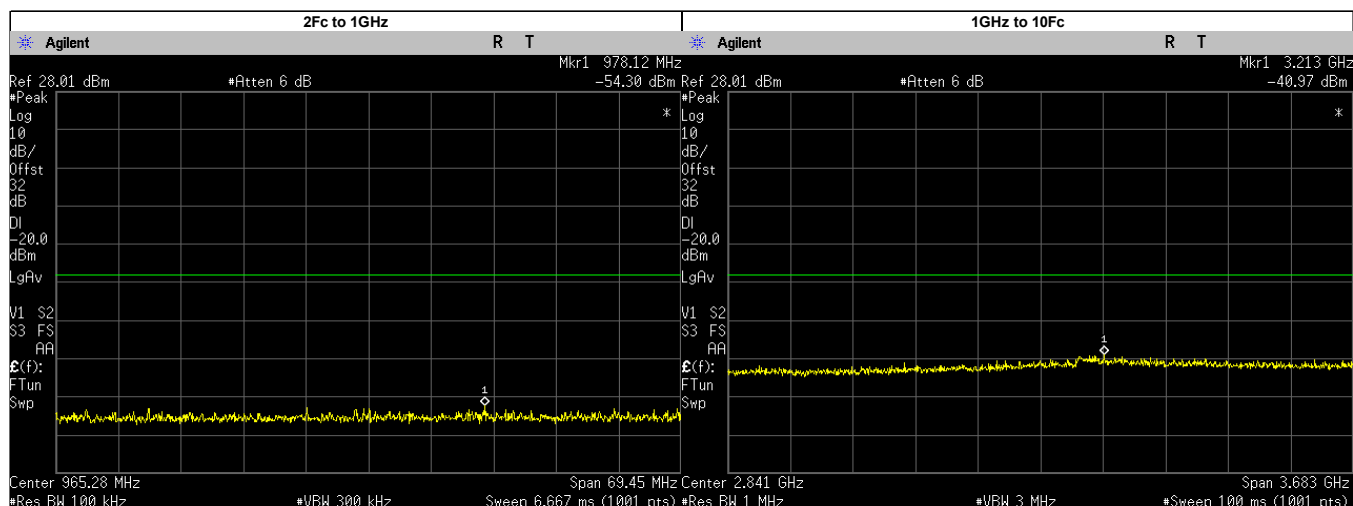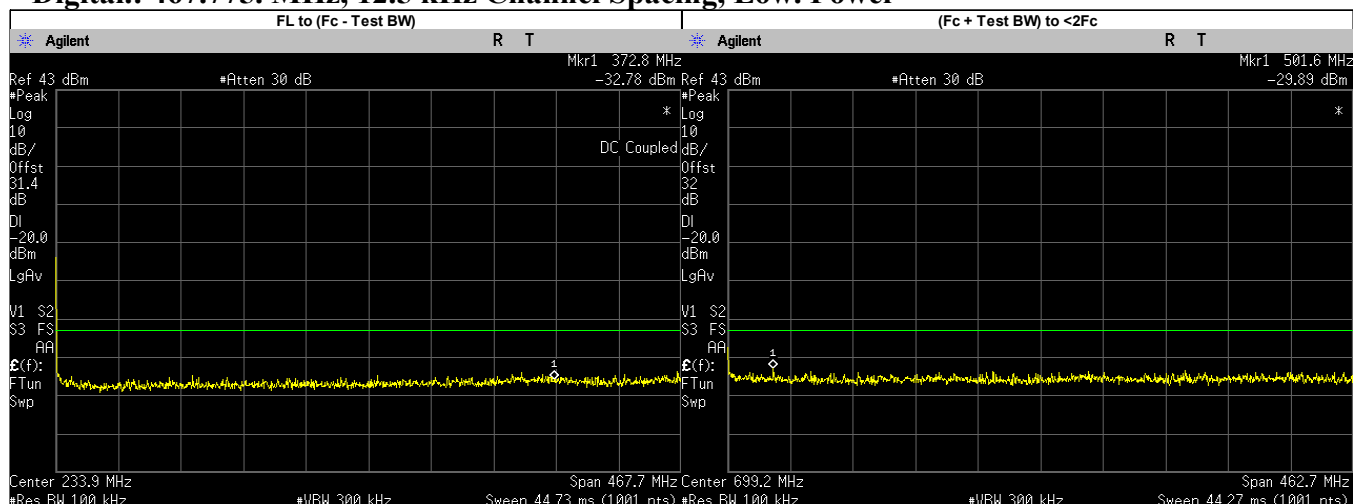



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	372.8000	-32.7750	-20.00	PASS
(Fc + Test BW) to <2Fc	501.6102	-29.8900	-20.00	PASS
2Fc to 1GHz	978.1232	-54.3000	-20.00	PASS
	935.5500	-57.0101	-20.00	PASS
1GHz to 10Fc	3213.3330	-40.9700	-20.00	PASS
	1403.3250	-45.5336	-20.00	PASS
	1871.1000	-44.6739	-20.00	PASS
	2338.8750	-44.8332	-20.00	PASS
	2806.6500	-44.2506	-20.00	PASS
	3274.4250	-42.4755	-20.00	PASS
	3742.2000	-43.1567	-20.00	PASS
	4209.9750	-43.8651	-20.00	PASS
	4677.7500	-43.4397	-20.00	PASS

Digital.: 482.0125. MHz, 12.5 kHz Channel Spacing, Max. Power

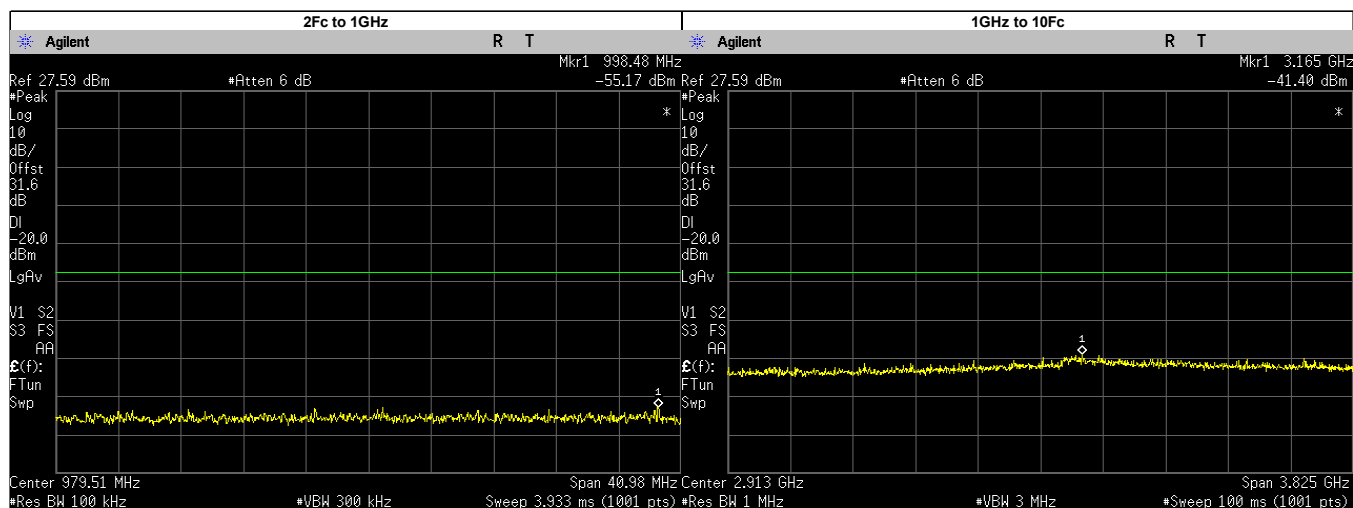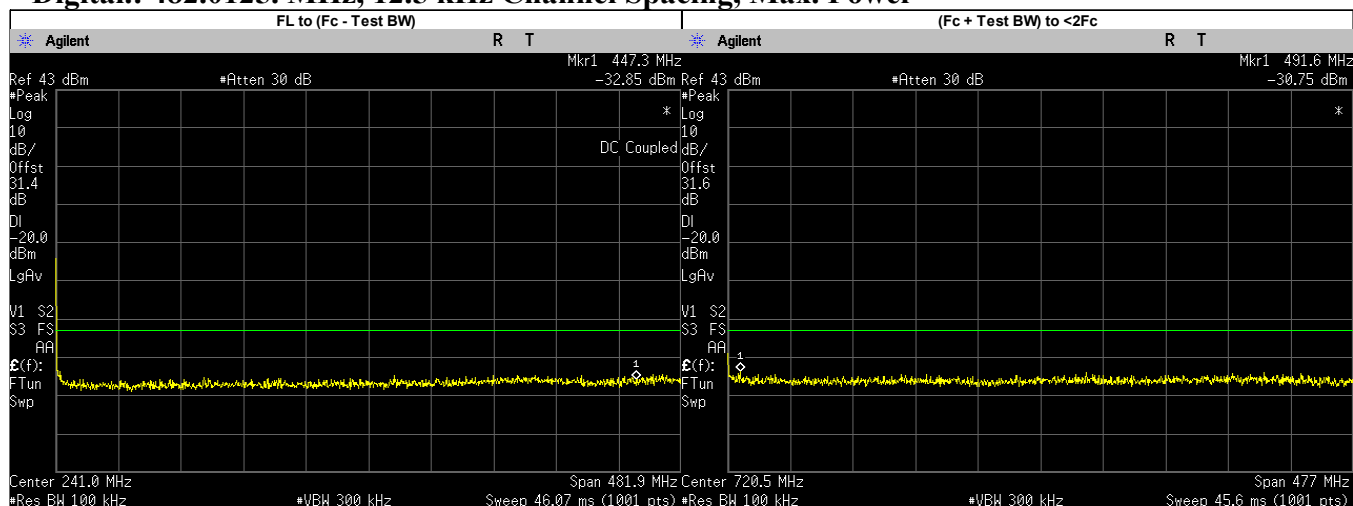



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	447.3000	-32.8470	-20.00	PASS
(Fc + Test BW) to <2Fc	491.6084	-30.7500	-20.00	PASS
2Fc to 1GHz	998.4839	-55.1700	-20.00	PASS
	964.0250	-55.9977	-20.00	PASS
1GHz to 10Fc	3165.0210	-41.4000	-20.00	PASS
	1446.0370	-45.8681	-20.00	PASS
	1928.0500	-46.0000	-20.00	PASS
	2410.0620	-44.4181	-20.00	PASS
	2892.0750	-44.4541	-20.00	PASS
	3374.0880	-43.2520	-20.00	PASS
	3856.1000	-43.7967	-20.00	PASS
	4338.1130	-44.5022	-20.00	PASS
	4820.1250	-45.3820	-20.00	PASS

Digital.: 482.0125. MHz, 12.5 kHz Channel Spacing, Low. Power

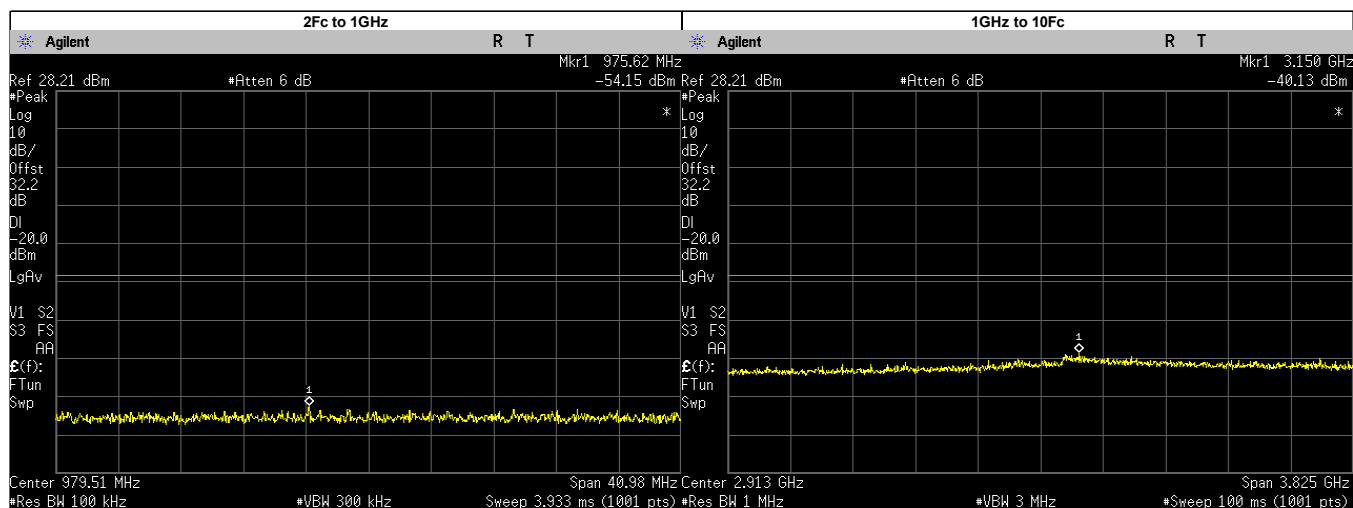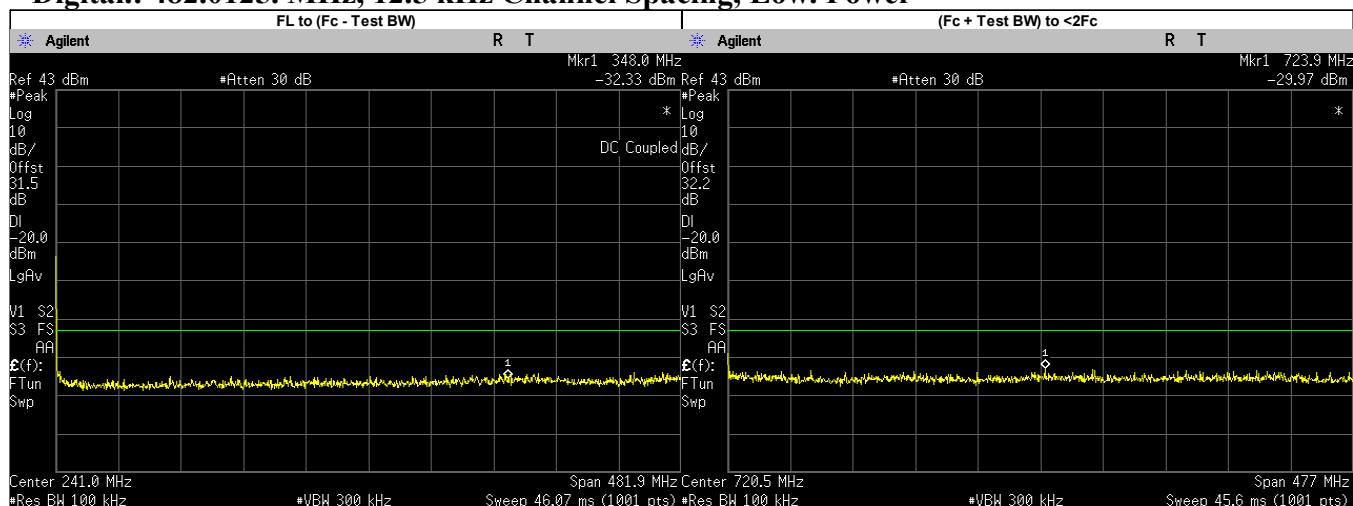



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	348.0000	-32.3320	-20.00	PASS
(Fc + Test BW) to <2Fc	723.8858	-29.9700	-20.00	PASS
2Fc to 1GHz	975.6199	-54.1500	-20.00	PASS
	964.0250	-57.5360	-20.00	PASS
1GHz to 10Fc	3149.7200	-40.1300	-20.00	PASS
	1446.0370	-44.9465	-20.00	PASS
	1928.0500	-45.1029	-20.00	PASS
	2410.0620	-44.1086	-20.00	PASS
	2892.0750	-43.7632	-20.00	PASS
	3374.0880	-43.1186	-20.00	PASS
	3856.1000	-43.5057	-20.00	PASS
	4338.1130	-43.9725	-20.00	PASS
	4820.1250	-43.9862	-20.00	PASS

Digital.: 511.9875. MHz, 12.5 kHz Channel Spacing, Max. Power

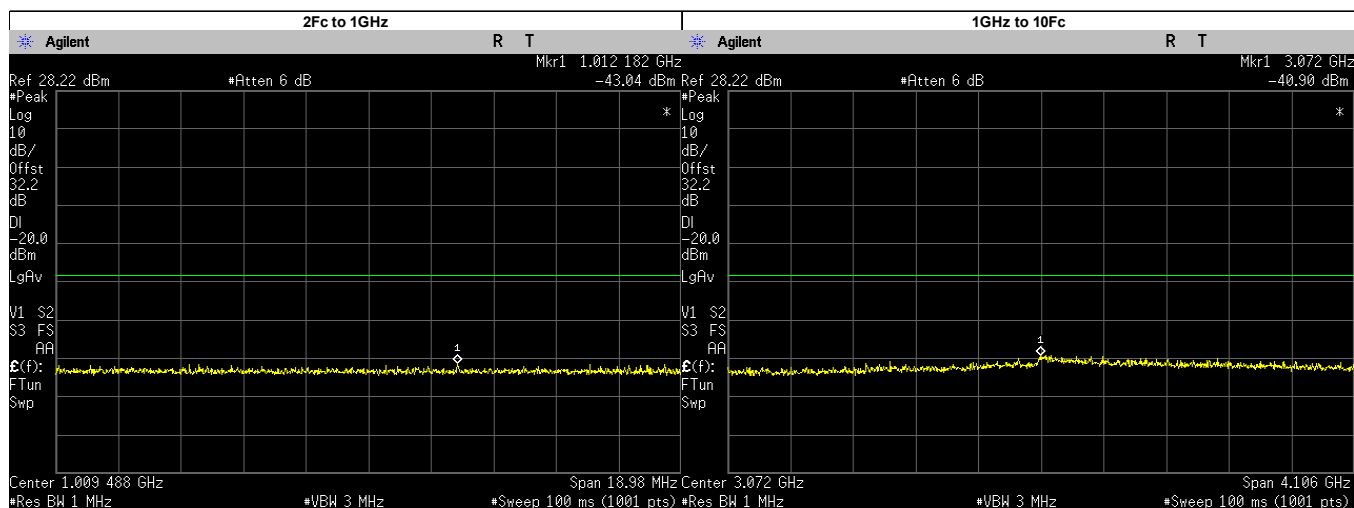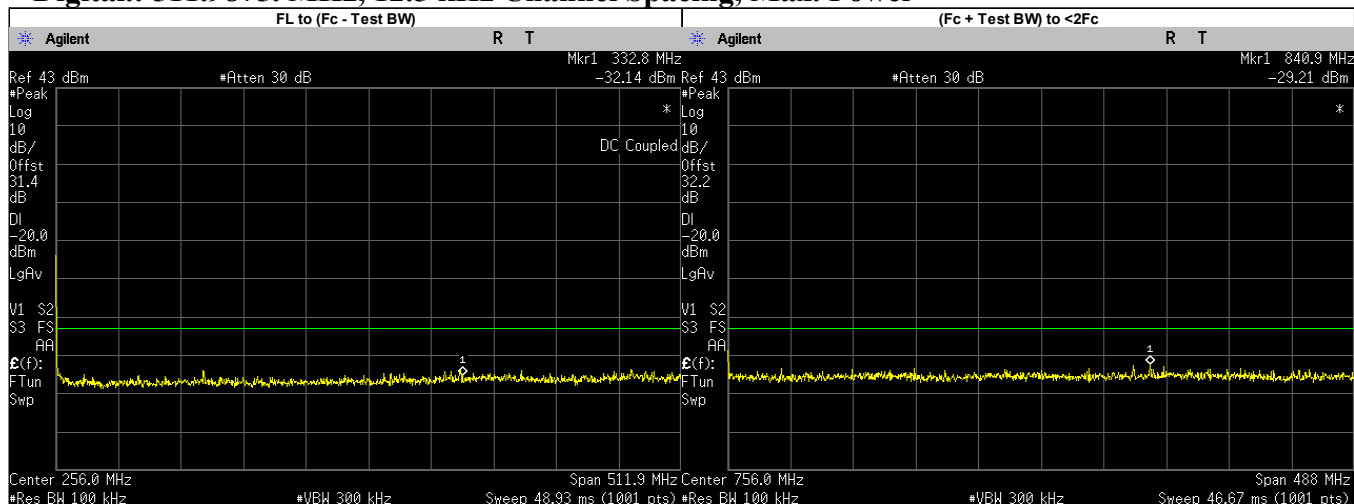



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	332.8000	-32.1360	-20.00	PASS
(Fc + Test BW) to <2Fc	840.9264	-29.2100	-20.00	PASS
2Fc to 1GHz	1012.1820	-43.0400	-20.00	PASS
1GHz to 10Fc	3137.6190	-40.9900	-20.00	PASS
	1023.9750	-45.3263	-20.00	PASS
	1535.9630	-44.0959	-20.00	PASS
	2047.9500	-44.6145	-20.00	PASS
	2559.9370	-44.7254	-20.00	PASS
	3071.9250	-40.9020	-20.00	PASS
	3583.9120	-42.6582	-20.00	PASS
	4095.9000	-43.5826	-20.00	PASS
	4607.8870	-43.7445	-20.00	PASS
	5119.8750	-43.4126	-20.00	PASS

Digital.: 511.9875. MHz, 12.5 kHz Channel Spacing, Low. Power

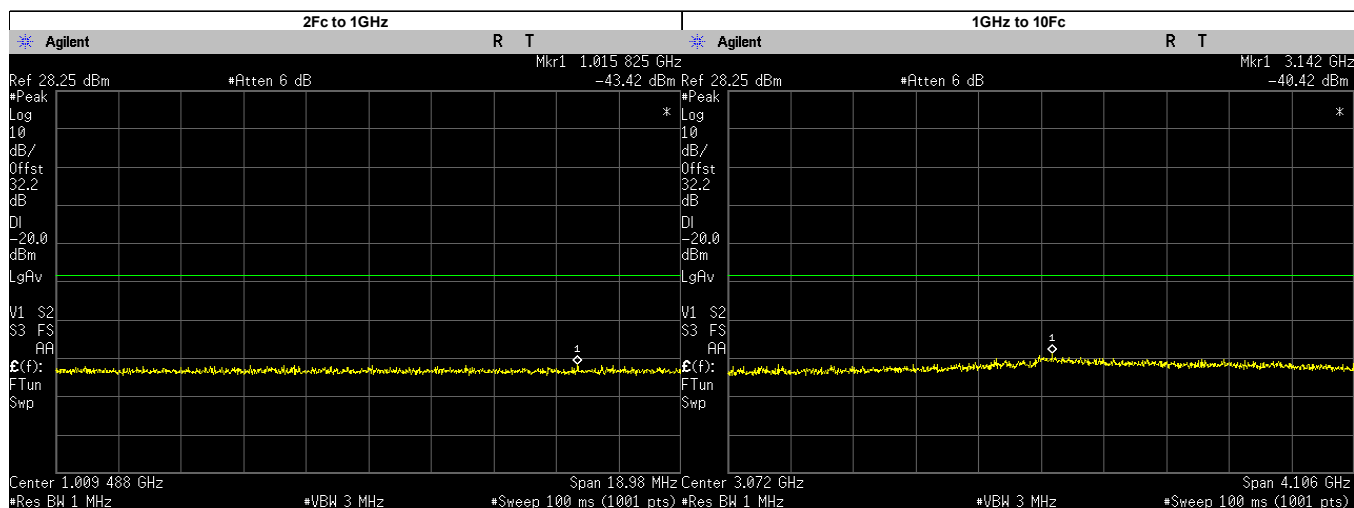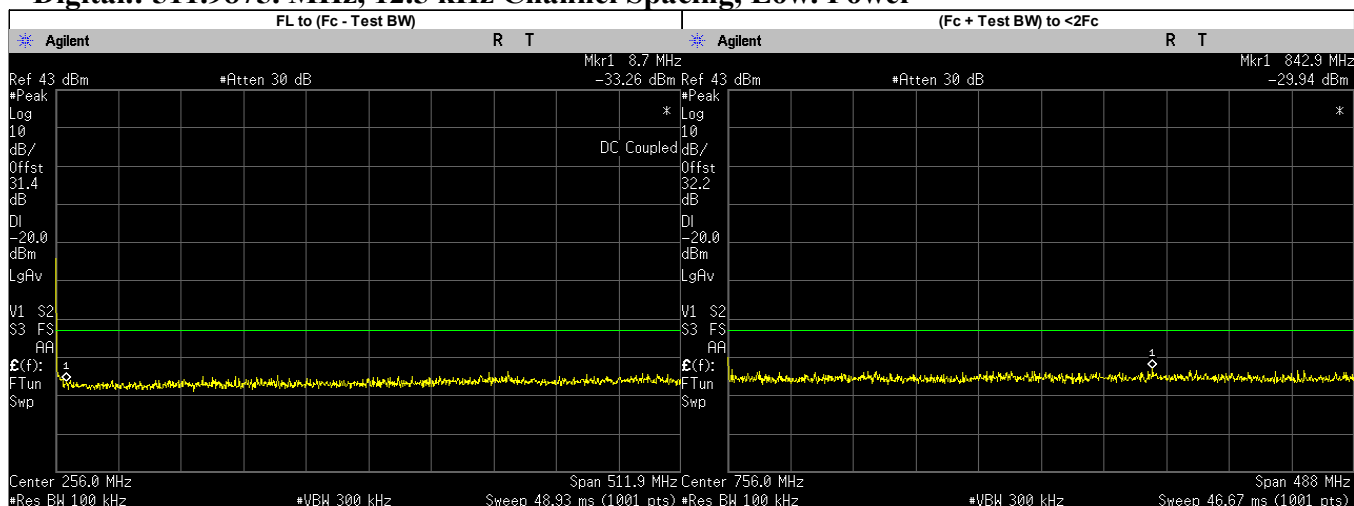



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	8.7000	-33.2580	-20.00	PASS
(Fc + Test BW) to <2Fc	842.8783	-29.9400	-20.00	PASS
2Fc to 1GHz	1015.8250	-43.4200	-20.00	PASS
1GHz to 10Fc	3141.7250	-40.4200	-20.00	PASS
	1023.9750	-45.7174	-20.00	PASS
	1535.9630	-44.4383	-20.00	PASS
	2047.9500	-44.9285	-20.00	PASS
	2559.9370	-43.9630	-20.00	PASS
	3071.9250	-42.5890	-20.00	PASS
	3583.9120	-42.8991	-20.00	PASS
	4095.9000	-43.6680	-20.00	PASS
	4607.8870	-43.3514	-20.00	PASS
	5119.8750	-43.3573	-20.00	PASS

Digital.: 526.9875. MHz, 12.5 kHz Channel Spacing, Max. Power
Not for FCC review

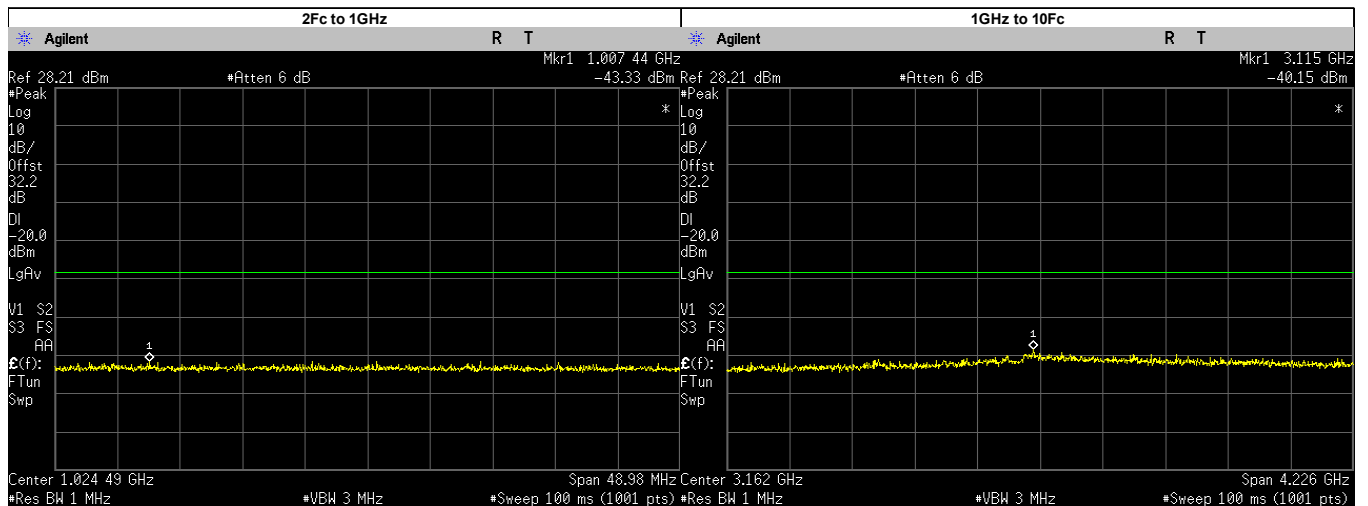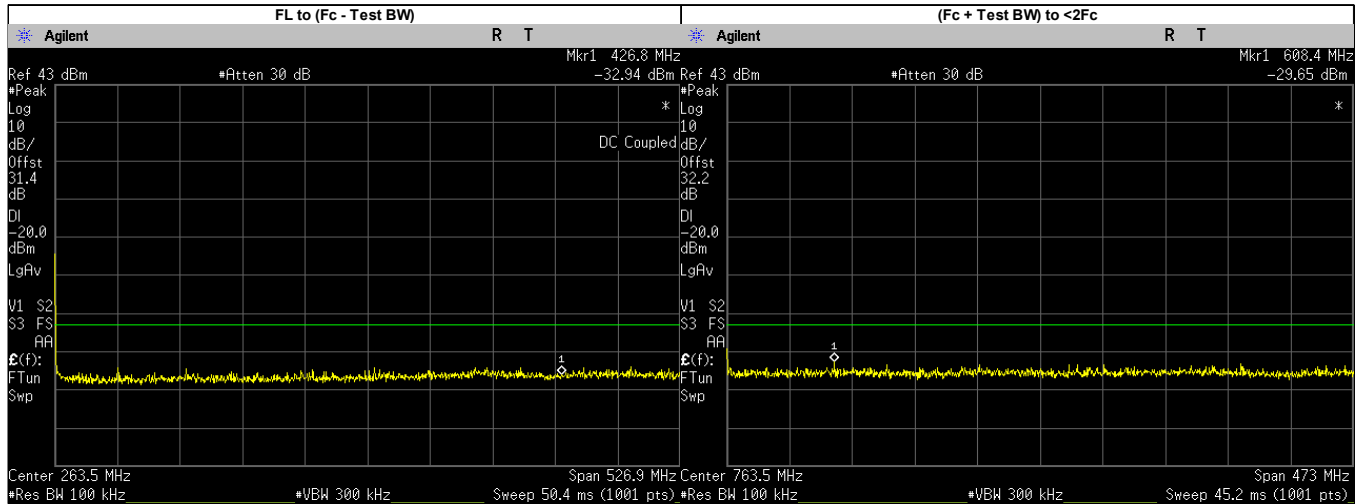

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	426.8000	-32.9380	-20.00	PASS
(Fc + Test BW) to <2Fc	608.3927	-29.6500	-20.00	PASS
2Fc to 1GHz	1007.4440	-43.3300	-20.00	PASS
1GHz to 10Fc	3115.4400	-40.1500	-20.00	PASS
	1053.9750	-45.4411	-20.00	PASS
	1580.9630	-44.4302	-20.00	PASS
	2107.9500	-44.2245	-20.00	PASS
	2634.9370	-44.5452	-20.00	PASS
	3161.9250	-42.6210	-20.00	PASS
	3688.9120	-43.2342	-20.00	PASS
	4215.9000	-43.7490	-20.00	PASS
	4742.8870	-43.6017	-20.00	PASS
	5269.8750	-43.7682	-20.00	PASS

Digital.: 526.9875. MHz, 12.5 kHz Channel Spacing, Low. Power
Not for FCC review

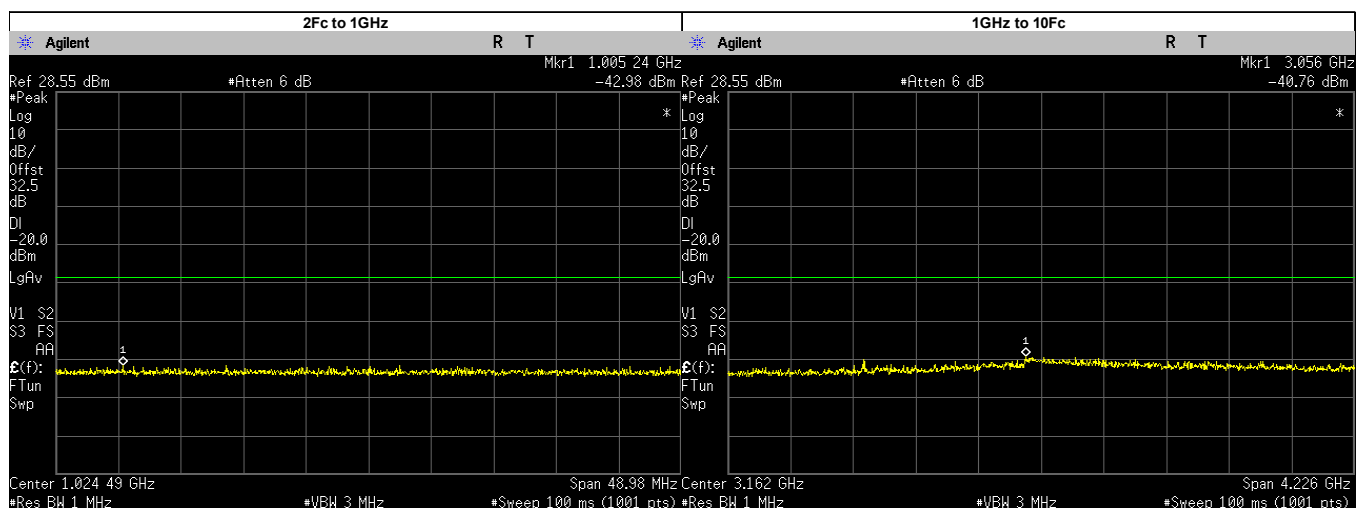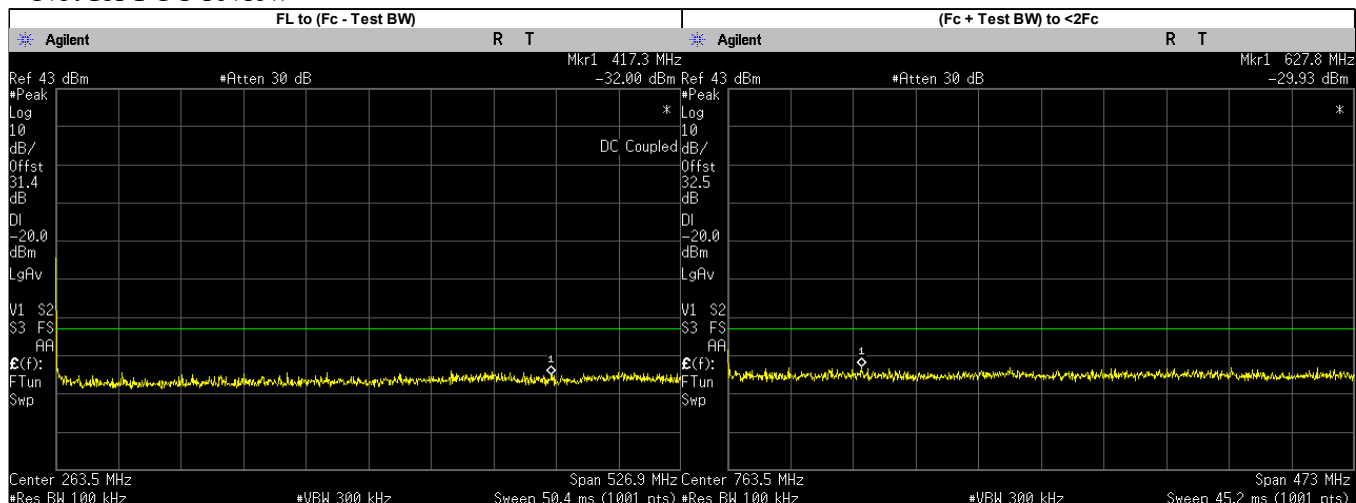

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	417.3000	-32.0000	-20.00	PASS
(Fc + Test BW) to <2Fc	627.7839	-29.9300	-20.00	PASS
2Fc to 1GHz	1005.2400	-42.9800	-20.00	PASS
1GHz to 10Fc	3056.2780	-40.7600	-20.00	PASS
	1053.9750	-45.4712	-20.00	PASS
	1580.9630	-44.5925	-20.00	PASS
	2107.9500	-44.2330	-20.00	PASS
	2634.9370	-43.3431	-20.00	PASS
	3161.9250	-41.6960	-20.00	PASS
	3688.9120	-42.5014	-20.00	PASS
	4215.9000	-43.4140	-20.00	PASS
	4742.8870	-43.4289	-20.00	PASS
	5269.8750	-43.7989	-20.00	PASS

6.9.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.10. Radiated Spurious Emission

6.10.1. Test Setup

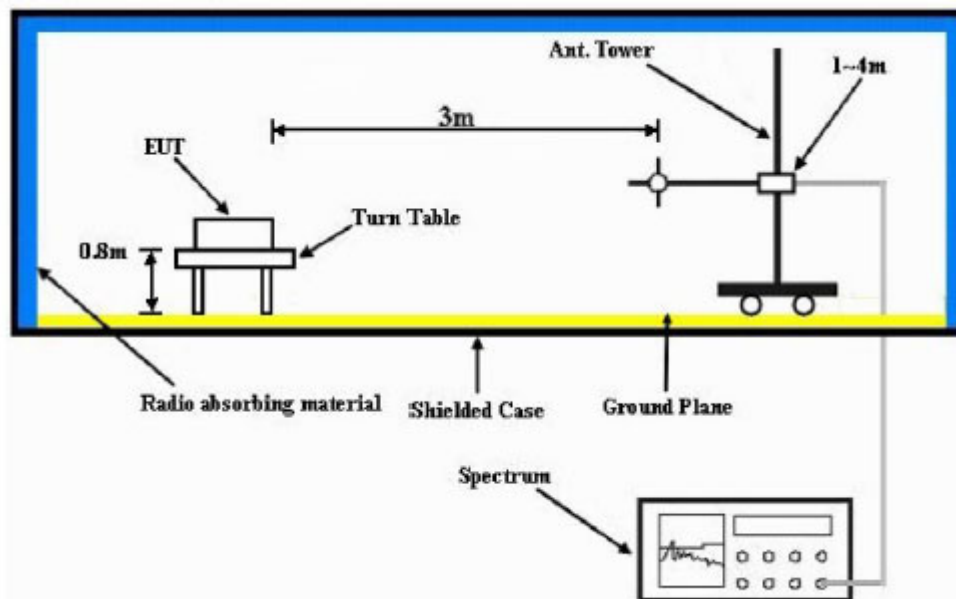


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.10.2. Test Result (Analog)

Model Number: AAM28TRN9RA1AN **SAC Transmitter Radiated Emission:** S/N: 511TYH6803 **SR:**33781-EMC-00012
Battery Part No: NA **Accy Part No:** RMN5127C-C5, HKN4192C-C1
Test Mode: TX Analog
450.025000 MHz (For Part 74) **25 kHz** **48.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-74.9408 **	-76.1002 **
1350.0750	-13.0000	-58.8560 **	-59.7053 **
1800.1000	-13.0000	-56.8057 **	-57.2050 **
2250.1250	-13.0000	-56.6025 **	-56.6608 **
2700.1500	-13.0000	-53.8929 **	-54.3362 **
3150.1750	-13.0000	-51.5041 **	-51.9052 **
3600.2000	-13.0000	-52.5566 **	-52.9531 **
4050.2250	-13.0000	-51.6070 **	-51.3461 **
4500.2500	-13.0000	-48.6976 **	-49.9585 **

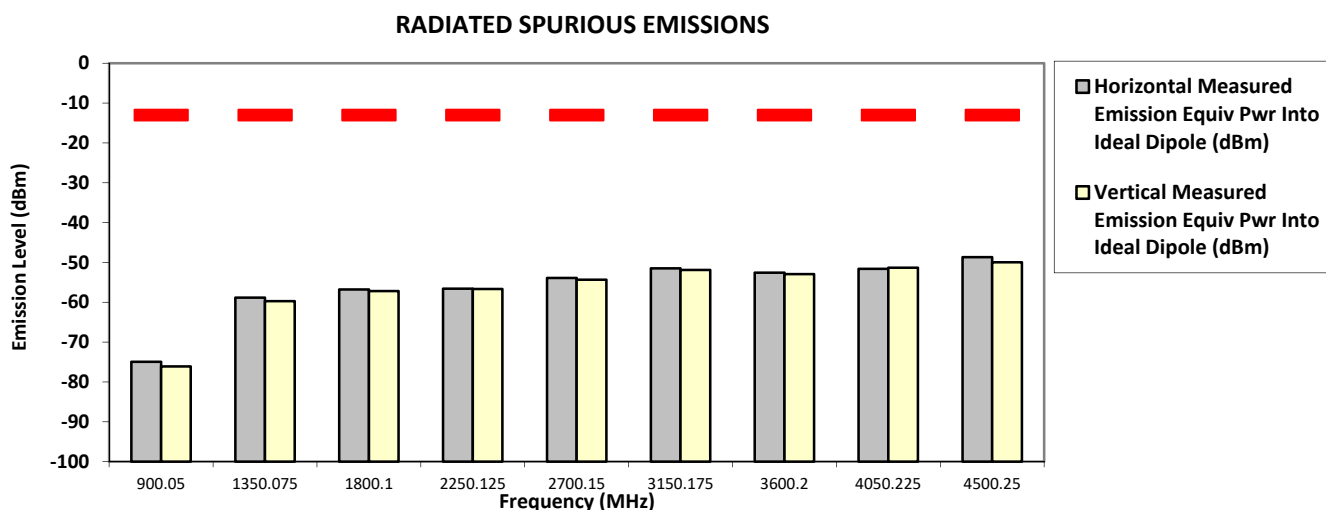

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN S/N: 511TYH6803 SR:33781-EMC-00012
Battery Part No: NA Accy Part No: RMN5127C-C5, HKN4192C-C1
Test Mode: TX Analog
450.025000 MHz (For Part 74) 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-76.3211 **	-75.2438 **
1350.0750	-13.0000	-60.1849 **	-59.3736 **
1800.1000	-13.0000	-56.8127 **	-57.0543 **
2250.1250	-13.0000	-55.7109 **	-56.7114 **
2700.1500	-13.0000	-52.5083 **	-53.8282 **
3150.1750	-13.0000	-51.8639 **	-52.4131 **
3600.2000	-13.0000	-52.5381 **	-53.5155 **
4050.2250	-13.0000	-50.5809 **	-50.6014 **
4500.2500	-13.0000	-50.1061 **	-49.2251 **

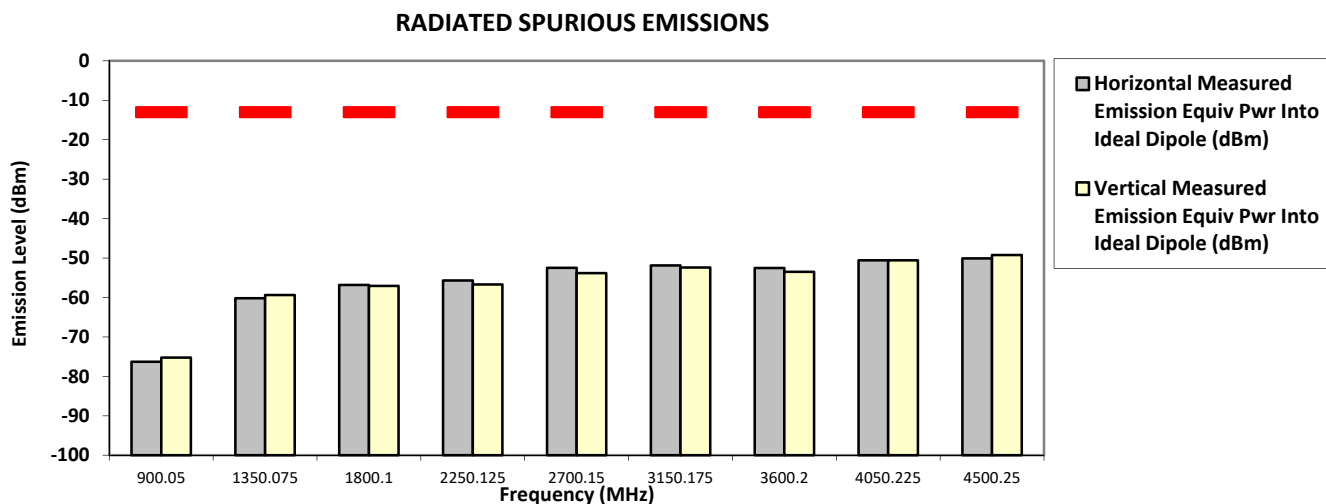


The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN S/N: 511TYH6803 SR:33781-EMC-00012
Battery Part No: NA Accy Part No: RMN5127C-C5, HKN4192C-C1
Test Mode: TX Analog
459.125000 MHz (For Part 22) 25 kHz 48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-75.9001 **	-75.2101 **
1377.3750	-13.0000	-58.5572 **	-59.9874 **
1836.5000	-13.0000	-56.2932 **	-57.3796 **
2295.6250	-13.0000	-55.3545 **	-54.9321 **
2754.7500	-13.0000	-53.2671 **	-53.8416 **
3213.8750	-13.0000	-50.5163 **	-50.5449 **
3673.0000	-13.0000	-52.7680 **	-52.3055 **
4132.1250	-13.0000	-51.0538 **	-51.1944 **
4591.2500	-13.0000	-49.5612 **	-50.2008 **

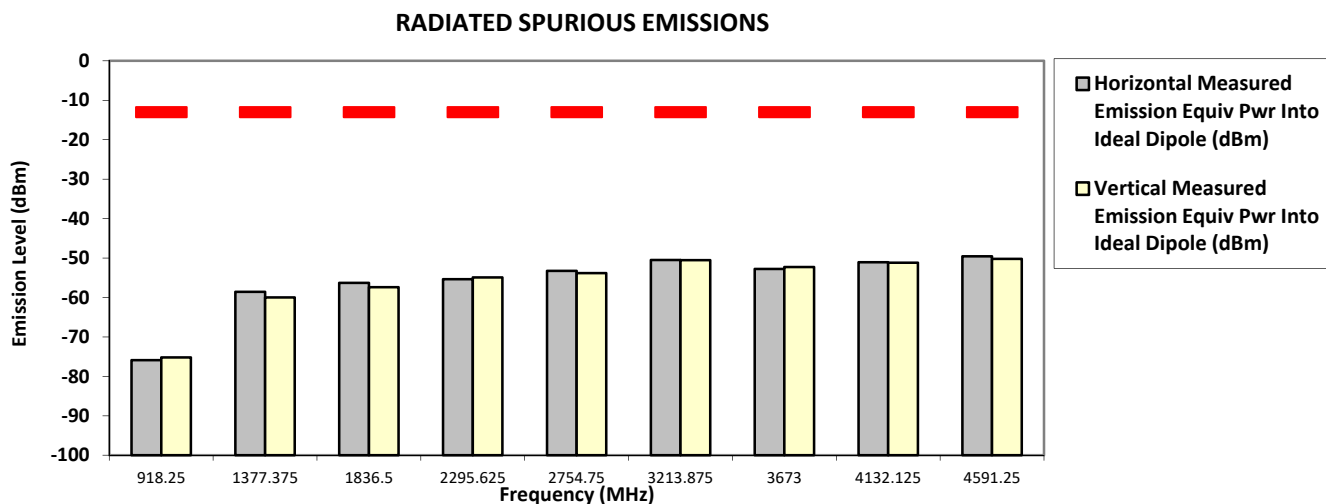


The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN S/N: 511TYH6803 SR:33781-EMC-00012
Battery Part No: NA Accy Part No: RMN5127C-C5, HKN4192C-C1
Test Mode: TX Analog
459.125000 MHz (For Part 22) 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-77.4152 **	-75.4202 **
1377.3750	-13.0000	-60.7813 **	-59.3181 **
1836.5000	-13.0000	-57.3035 **	-56.5990 **
2295.6250	-13.0000	-55.5634 **	-55.6244 **
2754.7500	-13.0000	-53.0618 **	-54.4785 **
3213.8750	-13.0000	-52.1803 **	-51.3282 **
3673.0000	-13.0000	-52.3114 **	-50.7349 **
4132.1250	-13.0000	-50.4221 **	-50.8309 **
4591.2500	-13.0000	-50.4332 **	-50.2615 **

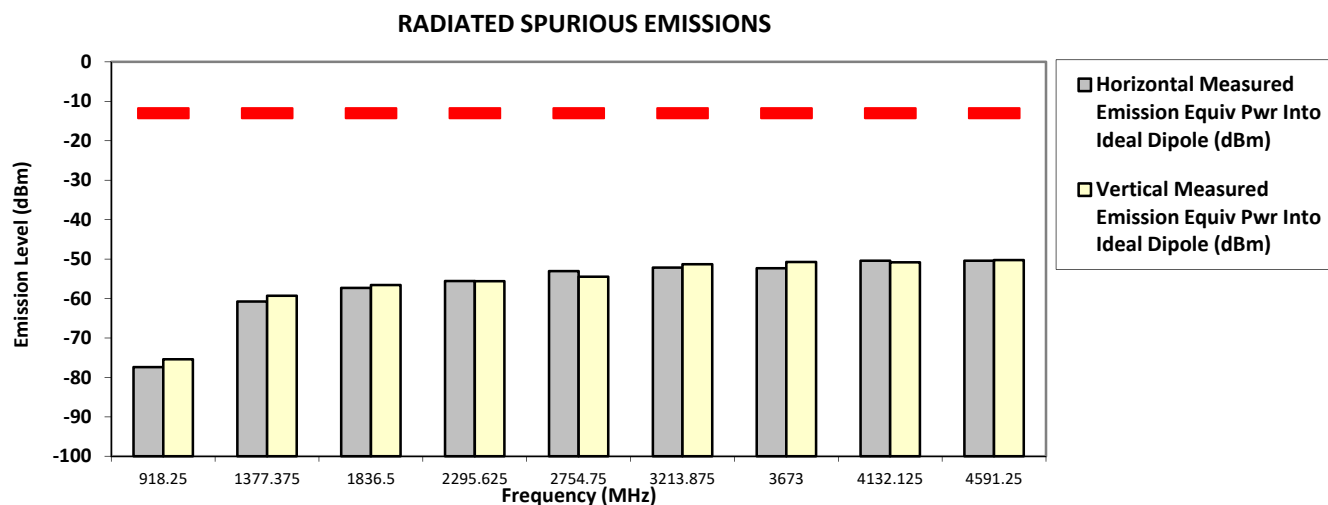

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Analog
467.775000 MHz (For Part 80) **25 kHz** **48.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-75.6672 **	-75.2307 **
1403.3250	-13.0000	-59.2736 **	-58.9301 **
1871.1000	-13.0000	-57.7685 **	-57.5336 **
2338.8750	-13.0000	-56.0937 **	-55.4944 **
2806.6500	-13.0000	-54.7123 **	-53.9986 **
3274.4250	-13.0000	-51.6032 **	-51.8253 **
3742.2000	-13.0000	-52.3652 **	-51.7098 **
4209.9750	-13.0000	-49.7716 **	-49.2259 **
4677.7500	-13.0000	-48.5361 **	-47.9757 **

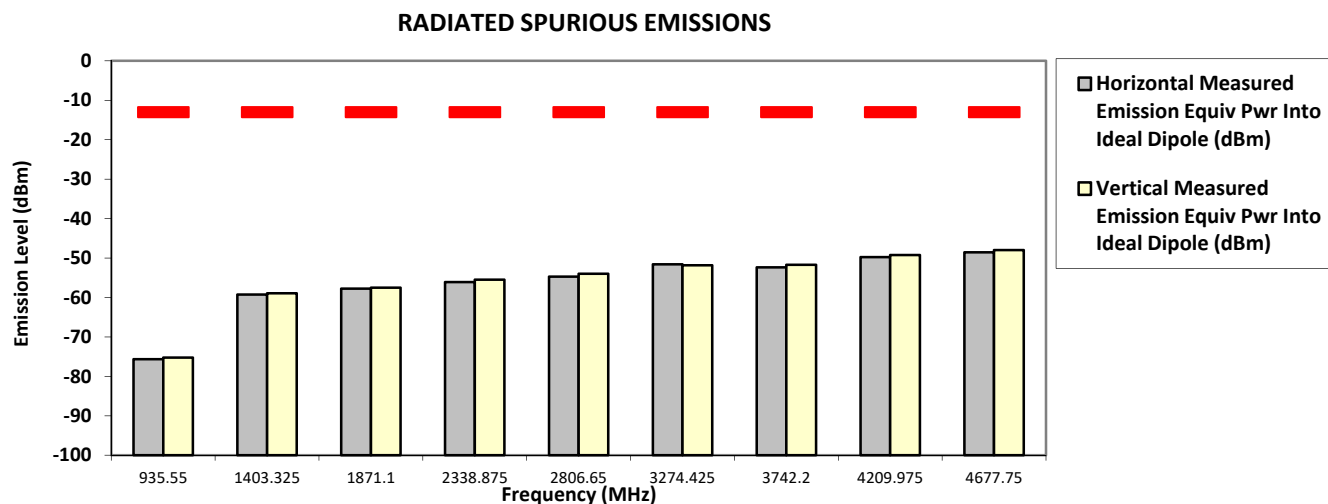

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Analog
467.775000 MHz (For Part 80) **25 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-73.7817 **	-75.6798 **
1403.3250	-13.0000	-57.8578 **	-56.5119 **
1871.1000	-13.0000	-58.0139 **	-58.5503 **
2338.8750	-13.0000	-56.2455 **	-56.4234 **
2806.6500	-13.0000	-55.0116 **	-54.2396 **
3274.4250	-13.0000	-52.2727 **	-52.0672 **
3742.2000	-13.0000	-52.2351 **	-50.9842 **
4209.9750	-13.0000	-51.0445 **	-50.2850 **
4677.7500	-13.0000	-48.0827 **	-48.9158 **

RADIATED SPURIOUS EMISSIONS

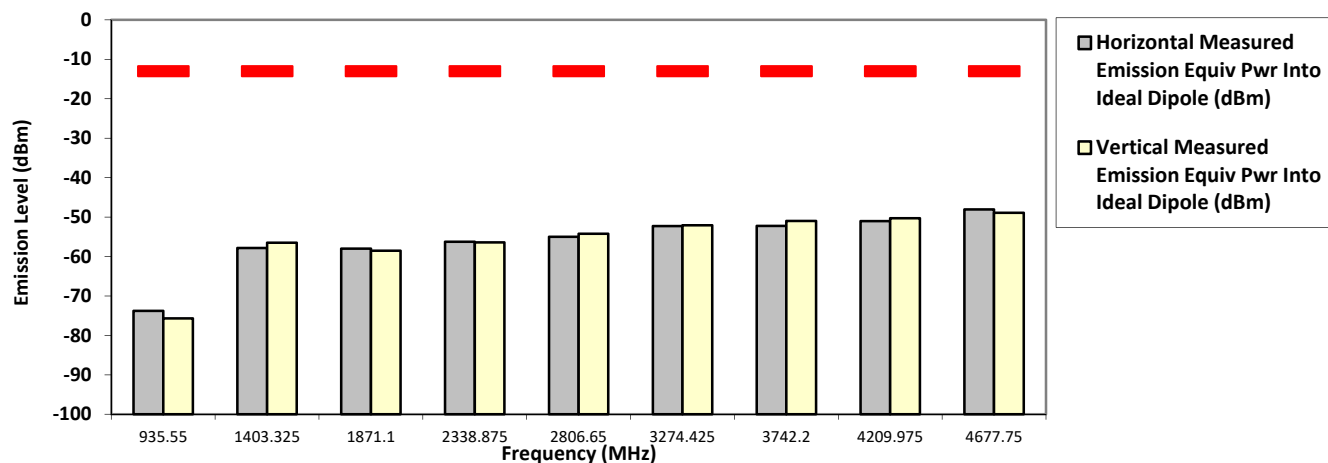

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Analog


482.012500 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
964.0250	-13.0000	-74.6360 **	-75.2748 **
1446.0375	-13.0000	-58.8011 **	-57.6611 **
1928.0500	-13.0000	-57.6717 **	-56.6898 **
2410.0625	-13.0000	-56.0558 **	-54.1706 **
2892.0750	-13.0000	-52.6162 **	-54.1090 **
3374.0875	-13.0000	-52.5797 **	-51.3630 **
3856.1000	-13.0000	-49.8525 **	-50.5620 **
4338.1125	-13.0000	-50.7843 **	-50.1736 **
4820.1250	-13.0000	-49.1131 **	-48.8599 **

RADIATED SPURIOUS EMISSIONS

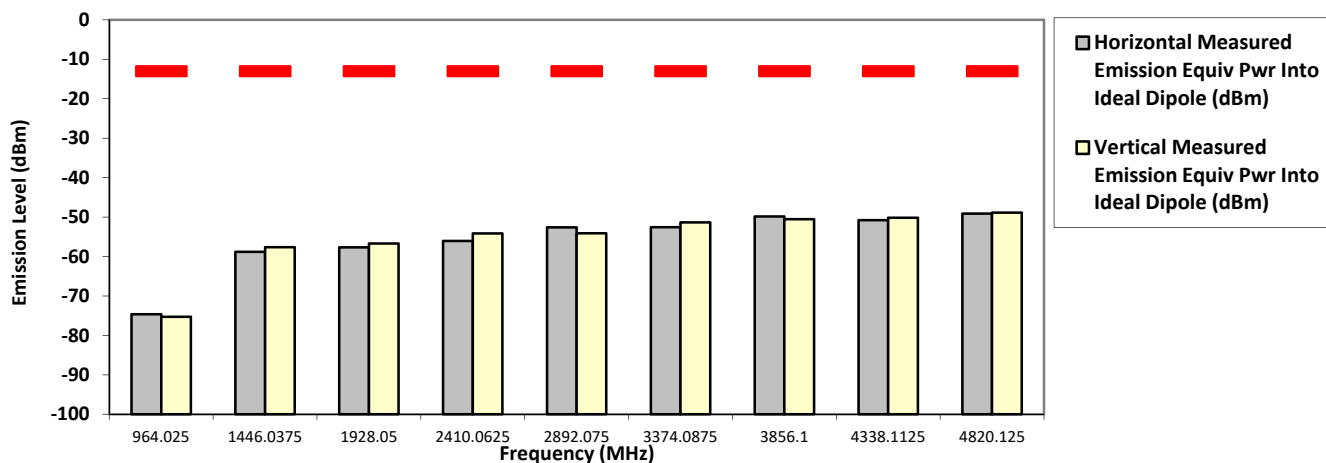

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN S/N: 511TYH6803 SR:33781-EMC-00012
Battery Part No: NA Accy Part No: RMN5127C-C5, HKN4192C-C1
482.012500 MHz Test Mode: TX Analog 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
964.0250	-13.0000	-74.6977 **	-74.5889 **
1446.0375	-13.0000	-57.6860 **	-58.9980 **
1928.0500	-13.0000	-56.7240 **	-57.5460 **
2410.0625	-13.0000	-55.6934 **	-54.7000 **
2892.0750	-13.0000	-54.3028 **	-53.7076 **
3374.0875	-13.0000	-51.7133 **	-51.7420 **
3856.1000	-13.0000	-51.3279 **	-51.3517 **
4338.1125	-13.0000	-50.3821 **	-50.6178 **
4820.1250	-13.0000	-48.2602 **	-49.4869 **

RADIATED SPURIOUS EMISSIONS

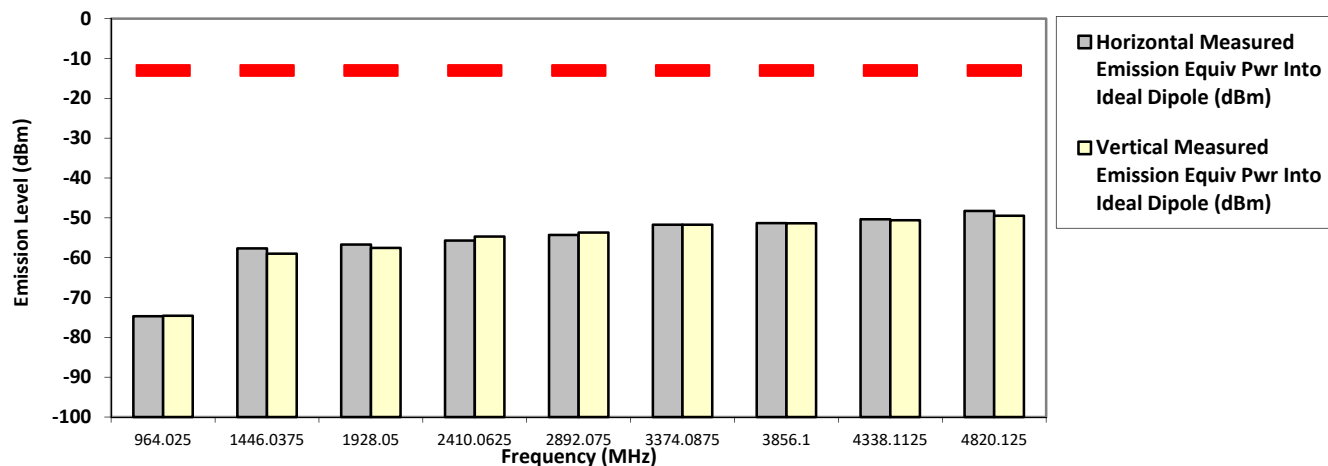

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
511.987500 MHz **Test Mode: TX Analog** **25 kHz** **48.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-61.2342 **	-62.7992 **
1535.9625	-13.0000	-56.9474 **	-56.8052 **
2047.9500	-13.0000	-56.4007 **	-56.3626 **
2559.9375	-13.0000	-54.2323 **	-54.5831 **
3071.9250	-13.0000	-52.5199 **	-52.5195 **
3583.9125	-13.0000	-52.0188 **	-51.6394 **
4095.9000	-13.0000	-51.6687 **	-50.6856 **
4607.8875	-13.0000	-48.8466 **	-48.9210 **
5119.8750	-13.0000	-48.0478 **	-47.8932 **

RADIATED SPURIOUS EMISSIONS

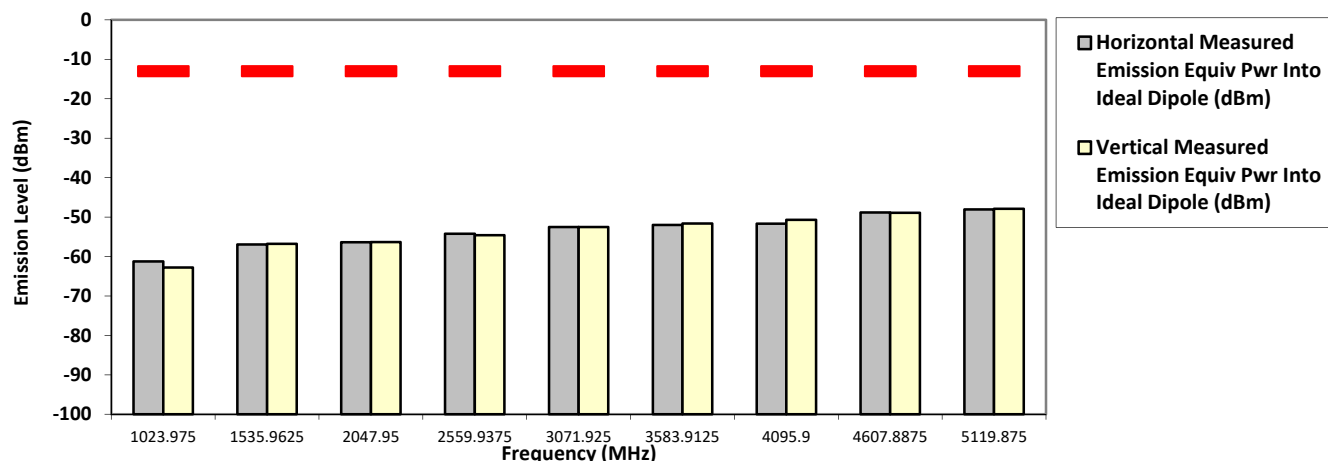

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
511.987500 MHz **Test Mode: TX Analog** **25 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-60.2820 **	-61.9105 **
1535.9625	-13.0000	-58.6354 **	-57.2568 **
2047.9500	-13.0000	-56.2844 **	-55.9729 **
2559.9375	-13.0000	-54.0439 **	-54.1345 **
3071.9250	-13.0000	-52.0653 **	-52.9728 **
3583.9125	-13.0000	-52.9585 **	-53.4411 **
4095.9000	-13.0000	-51.0746 **	-51.2362 **
4607.8875	-13.0000	-49.8523 **	-49.7067 **
5119.8750	-13.0000	-46.4638 **	-49.2239 **

RADIATED SPURIOUS EMISSIONS

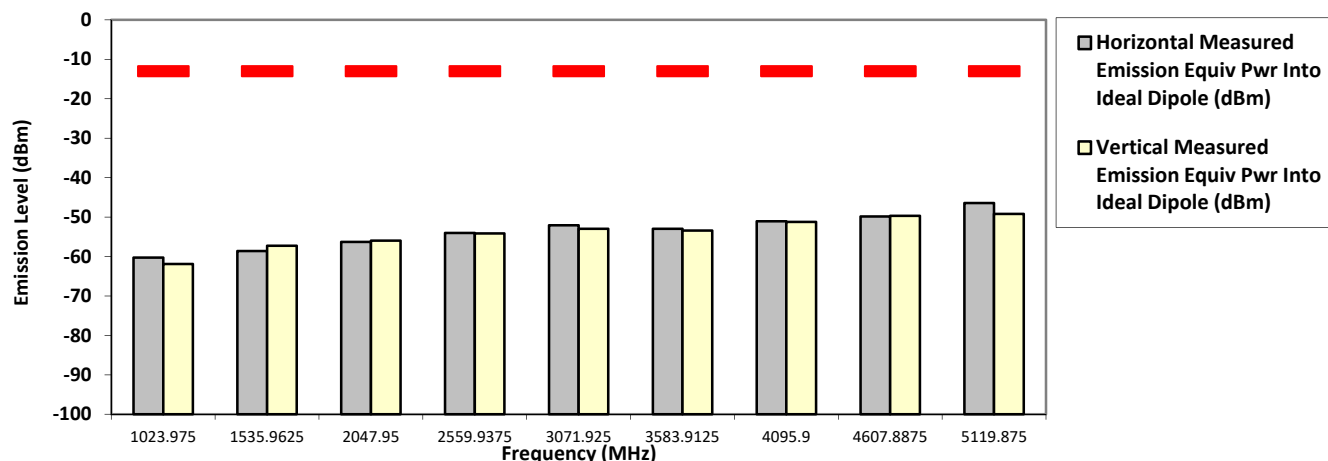

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Analog **25 kHz**
526.987500 MHz (Not for FCC review) **48.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1053.9750	-13.0000	-60.8024 **	-60.5345 **
1580.9625	-13.0000	-58.0906 **	-58.1991 **
2107.9500	-13.0000	-55.5869 **	-55.7728 **
2634.9375	-13.0000	-54.5479 **	-53.9666 **
3161.9250	-13.0000	-50.4659 **	-50.5799 **
3688.9125	-13.0000	-51.0840 **	-52.8941 **
4215.9000	-13.0000	-50.2843 **	-50.0197 **
4742.8875	-13.0000	-48.5559 **	-48.6608 **
5269.8750	-13.0000	-48.6310 **	-47.9858 **

RADIATED SPURIOUS EMISSIONS

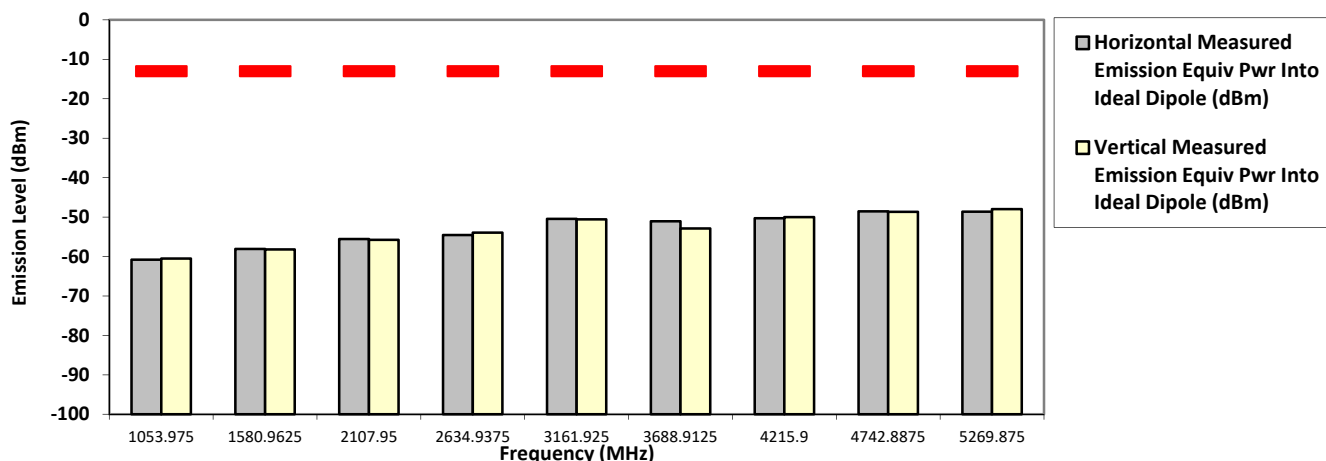

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Analog **25 kHz** **1.000 Watt(s) /Low Power**
526.987500 MHz (Not for FCC review)

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1053.9750	-13.0000	-60.9372 **	-61.8993 **
1580.9625	-13.0000	-58.3994 **	-57.6751 **
2107.9500	-13.0000	-56.8460 **	-57.2380 **
2634.9375	-13.0000	-54.3456 **	-53.1024 **
3161.9250	-13.0000	-48.4160 **	-50.2828 **
3688.9125	-13.0000	-51.4299 **	-53.2283 **
4215.9000	-13.0000	-50.2697 **	-51.6642 **
4742.8875	-13.0000	-49.2317 **	-49.0331 **
5269.8750	-13.0000	-48.0569 **	-47.7200 **

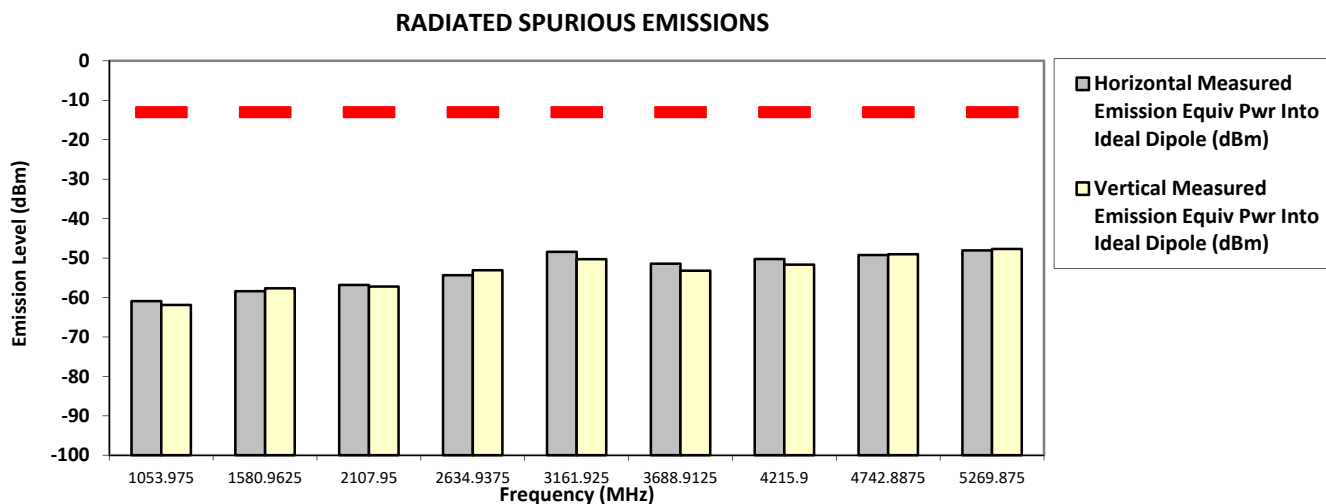

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks: Passed Results Marginal Results Failed Results

6.10.3. Test Result (Digital)

Model Number: AAM28TRN9RA1AN SAC Transmitter Radiated Emission: S/N: 511TYH6803 SR:33781-EMC-00012
Battery Part No: NA Accy Part No: RMN5127C-C5, HKN4192C-C1
Test Mode: TX Digital
450.025000 MHz 12.5 kHz 48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-75.6977 **	-75.7198 **
1350.0750	-20.0000	-60.2192 **	-59.6208 **
1800.1000	-20.0000	-55.8761 **	-56.2212 **
2250.1250	-20.0000	-55.3558 **	-56.4914 **
2700.1500	-20.0000	-54.6997 **	-54.0625 **
3150.1750	-20.0000	-52.3891 **	-52.3276 **
3600.2000	-20.0000	-53.3930 **	-52.3642 **
4050.2250	-20.0000	-50.5138 **	-51.1028 **
4500.2500	-20.0000	-50.0208 **	-50.6856 **

RADIATED SPURIOUS EMISSIONS

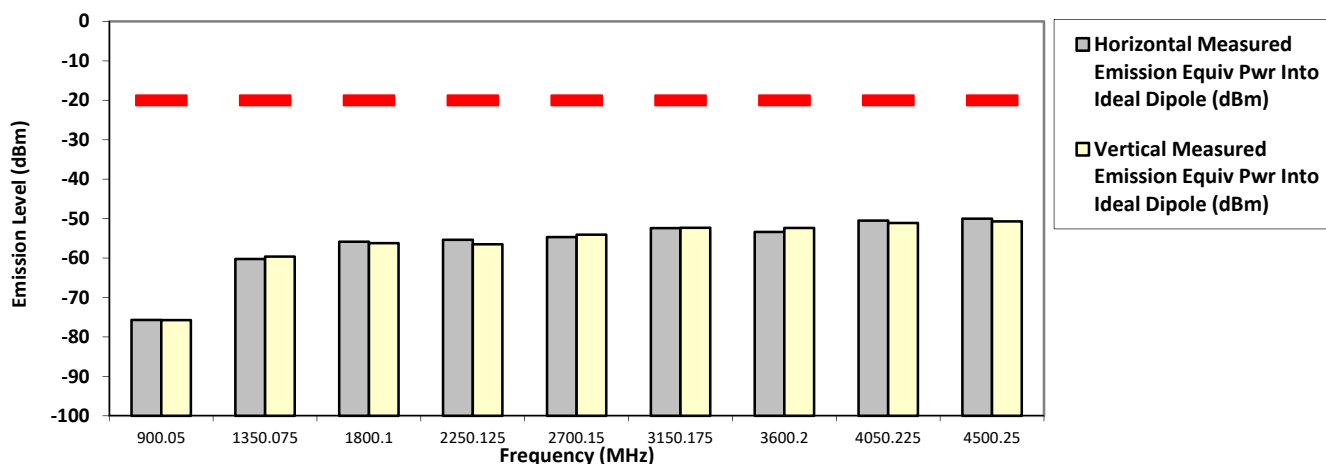

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Digital
450.025000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-75.7525 **	-74.5875 **
1350.0750	-20.0000	-60.5462 **	-60.2584 **
1800.1000	-20.0000	-54.6068 **	-55.5818 **
2250.1250	-20.0000	-56.5341 **	-55.0995 **
2700.1500	-20.0000	-54.4568 **	-53.9246 **
3150.1750	-20.0000	-52.7083 **	-52.1944 **
3600.2000	-20.0000	-53.9891 **	-51.5615 **
4050.2250	-20.0000	-51.0828 **	-51.1514 **
4500.2500	-20.0000	-49.4907 **	-49.5052 **

RADIATED SPURIOUS EMISSIONS

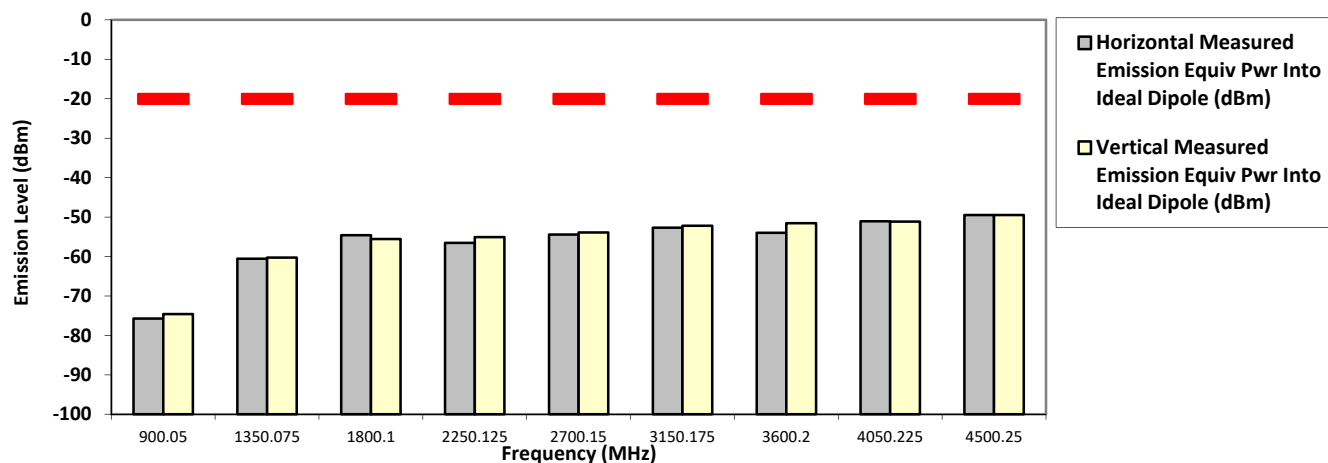

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


459.125000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-74.8959 **	-74.7631 **
1377.3750	-20.0000	-59.9043 **	-59.3616 **
1836.5000	-20.0000	-56.5578 **	-57.1455 **
2295.6250	-20.0000	-56.2508 **	-56.4019 **
2754.7500	-20.0000	-54.5266 **	-54.2570 **
3213.8750	-20.0000	-51.4582 **	-50.4962 **
3673.0000	-20.0000	-51.4955 **	-52.3749 **
4132.1250	-20.0000	-50.1868 **	-50.1851 **
4591.2500	-20.0000	-49.5356 **	-49.4989 **

RADIATED SPURIOUS EMISSIONS

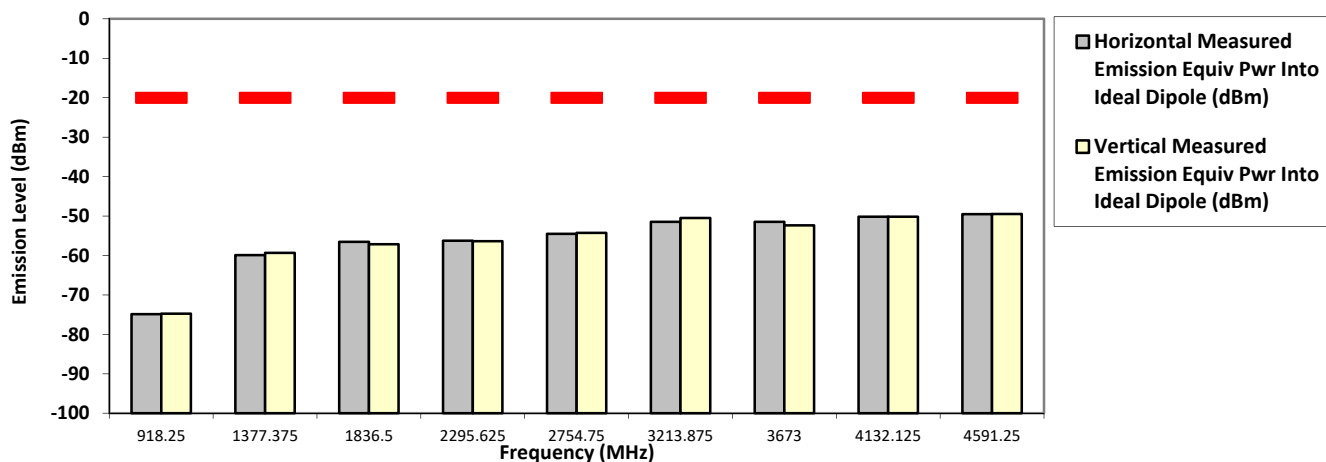

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


459.125000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-75.8979 **	-75.6494 **
1377.3750	-20.0000	-59.8437 **	-60.2190 **
1836.5000	-20.0000	-57.1429 **	-57.3580 **
2295.6250	-20.0000	-55.6516 **	-56.1728 **
2754.7500	-20.0000	-54.3413 **	-54.3040 **
3213.8750	-20.0000	-50.2474 **	-49.8388 **
3673.0000	-20.0000	-52.1935 **	-52.4107 **
4132.1250	-20.0000	-51.3073 **	-50.7349 **
4591.2500	-20.0000	-49.3216 **	-48.9795 **

RADIATED SPURIOUS EMISSIONS

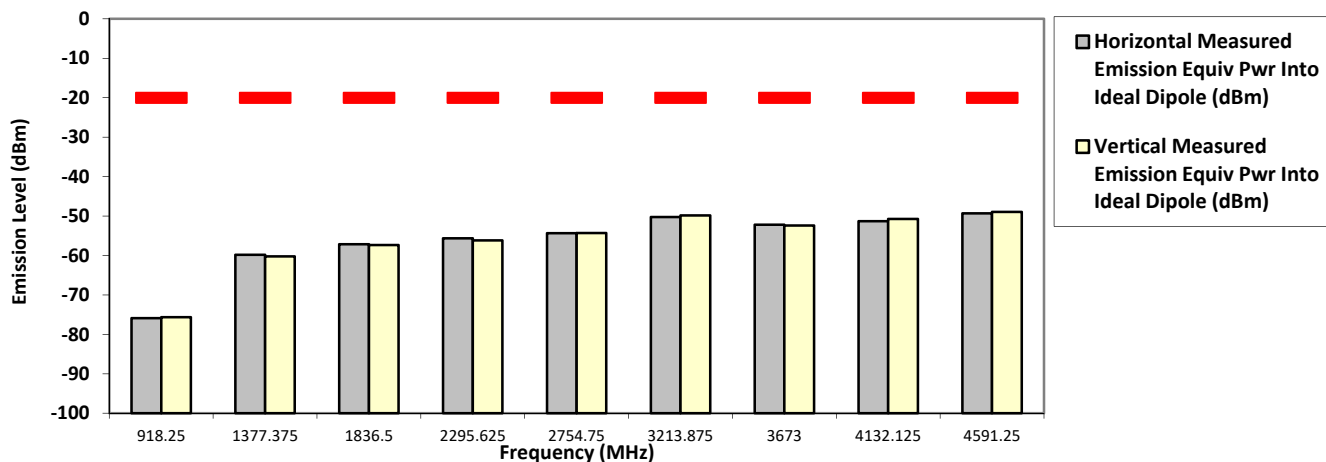

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


467.775000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-74.7040 **	-76.0203 **
1403.3250	-20.0000	-60.6526 **	-59.8845 **
1871.1000	-20.0000	-56.1779 **	-56.8538 **
2338.8750	-20.0000	-54.9392 **	-55.2333 **
2806.6500	-20.0000	-52.0774 **	-53.9761 **
3274.4250	-20.0000	-52.2248 **	-50.7544 **
3742.2000	-20.0000	-51.3353 **	-52.0878 **
4209.9750	-20.0000	-51.4109 **	-51.2711 **
4677.7500	-20.0000	-49.8426 **	-49.1863 **

RADIATED SPURIOUS EMISSIONS

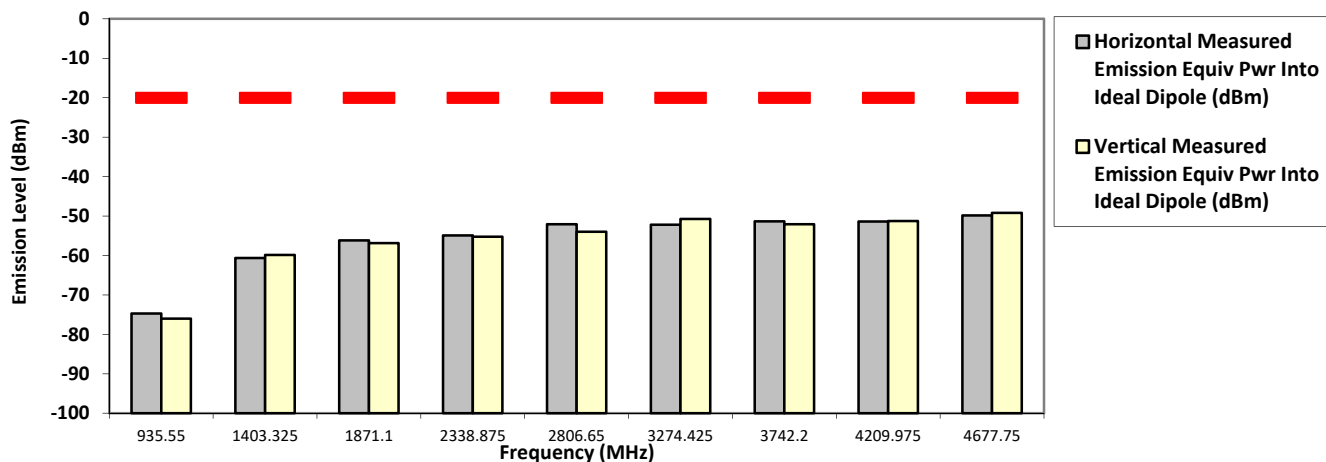

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


467.775000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-75.2514 **	-74.8286 **
1403.3250	-20.0000	-60.6389 **	-59.1198 **
1871.1000	-20.0000	-56.6443 **	-57.1950 **
2338.8750	-20.0000	-55.1967 **	-56.6307 **
2806.6500	-20.0000	-54.3839 **	-54.9343 **
3274.4250	-20.0000	-51.7649 **	-51.2411 **
3742.2000	-20.0000	-52.6361 **	-50.2745 **
4209.9750	-20.0000	-50.5477 **	-50.2007 **
4677.7500	-20.0000	-49.3461 **	-48.8917 **

RADIATED SPURIOUS EMISSIONS

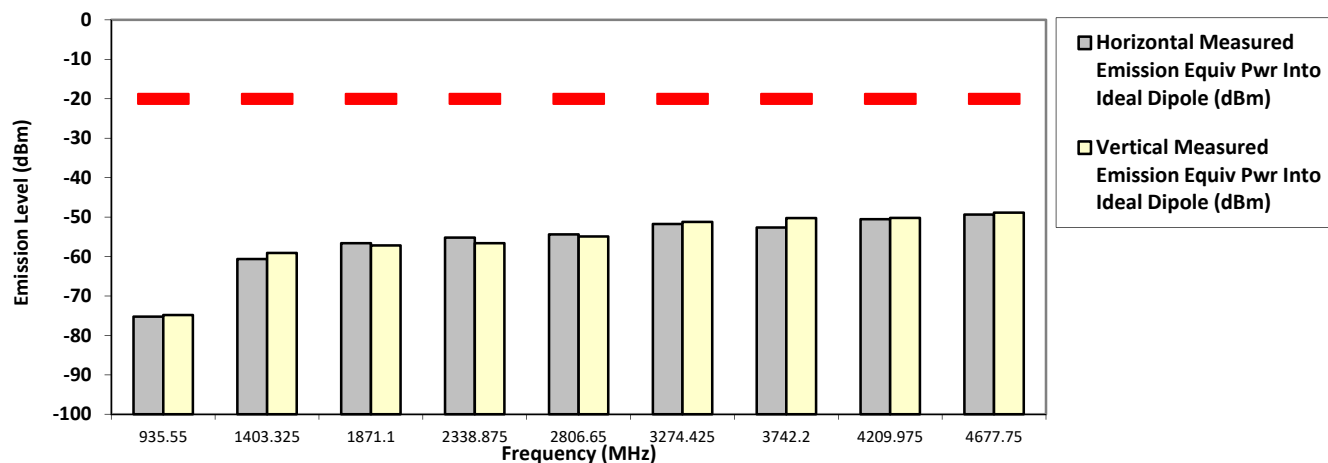

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


482.012500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
964.0250	-20.0000	-73.1874 **	-74.3149 **
1446.0375	-20.0000	-58.0087 **	-58.8703 **
1928.0500	-20.0000	-51.8600 *	-49.5100 *
2410.0625	-20.0000	-55.4987 **	-55.6616 **
2892.0750	-20.0000	-53.4528 **	-53.3461 **
3374.0875	-20.0000	-51.6339 **	-51.4463 **
3856.1000	-20.0000	-50.4127 **	-50.2824 **
4338.1125	-20.0000	-50.5437 **	-50.7849 **
4820.1250	-20.0000	-48.9133 **	-47.5632 **

RADIATED SPURIOUS EMISSIONS

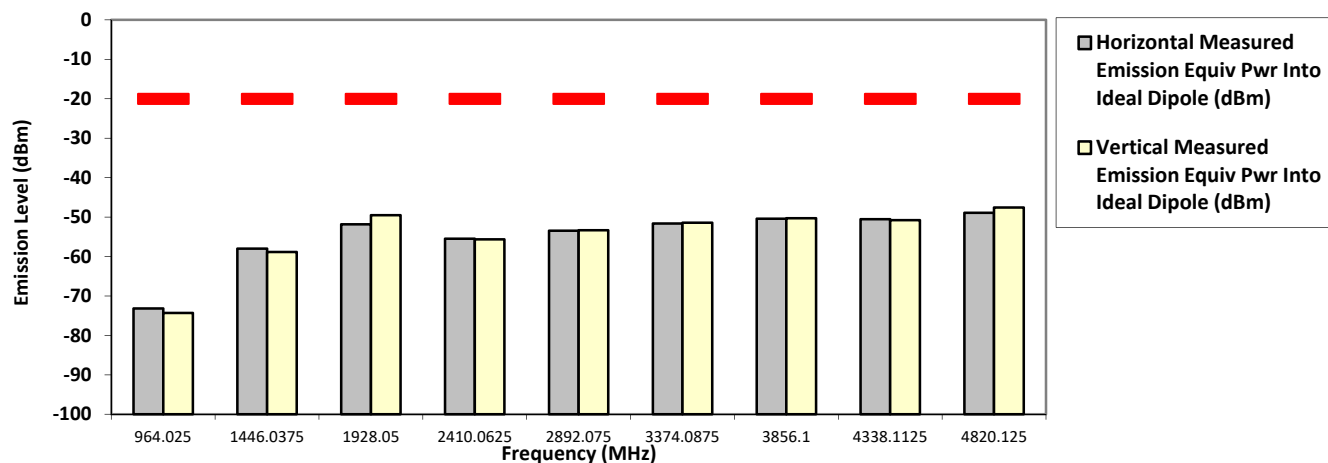

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


482.012500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
964.0250	-20.0000	-74.4363 **	-73.7368 **
1446.0375	-20.0000	-59.6505 **	-61.1127 **
1928.0500	-20.0000	-57.6778 **	-57.1301 **
2410.0625	-20.0000	-54.7676 **	-54.8241 **
2892.0750	-20.0000	-54.7621 **	-54.0518 **
3374.0875	-20.0000	-51.9831 **	-52.1247 **
3856.1000	-20.0000	-50.9009 **	-50.8787 **
4338.1125	-20.0000	-50.9113 **	-50.8063 **
4820.1250	-20.0000	-48.8591 **	-47.6047 **

RADIATED SPURIOUS EMISSIONS

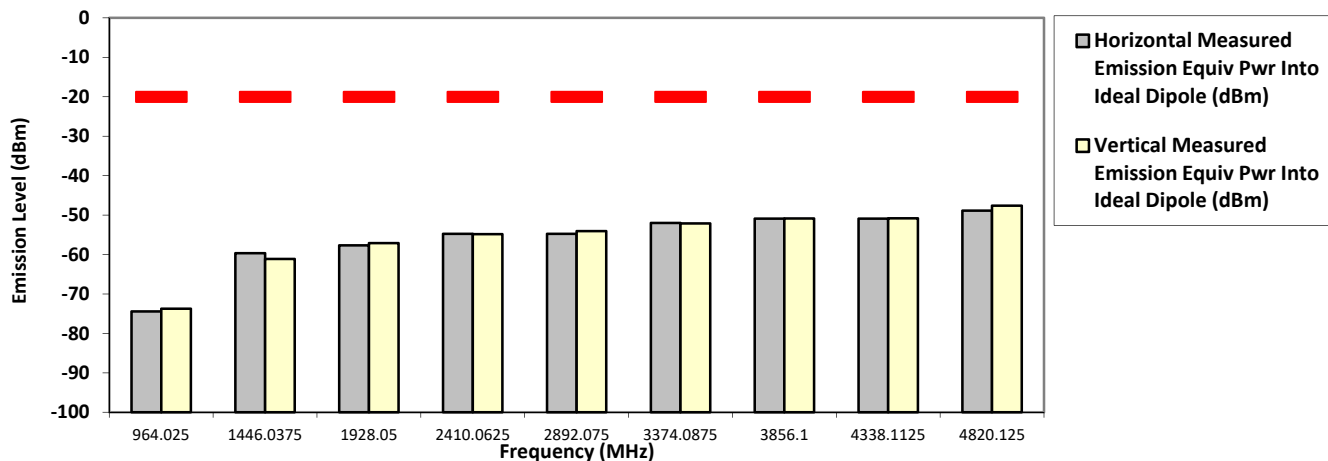

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


511.987500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-61.7285 **	-61.6990 **
1535.9625	-20.0000	-57.9676 **	-58.6970 **
2047.9500	-20.0000	-56.4431 **	-55.2217 **
2559.9375	-20.0000	-53.2418 **	-54.4937 **
3071.9250	-20.0000	-51.0865 **	-49.8891 **
3583.9125	-20.0000	-53.6790 **	-52.3085 **
4095.9000	-20.0000	-50.9954 **	-50.6096 **
4607.8875	-20.0000	-49.3035 **	-49.4171 **
5119.8750	-20.0000	-47.8067 **	-47.2474 **

RADIATED SPURIOUS EMISSIONS

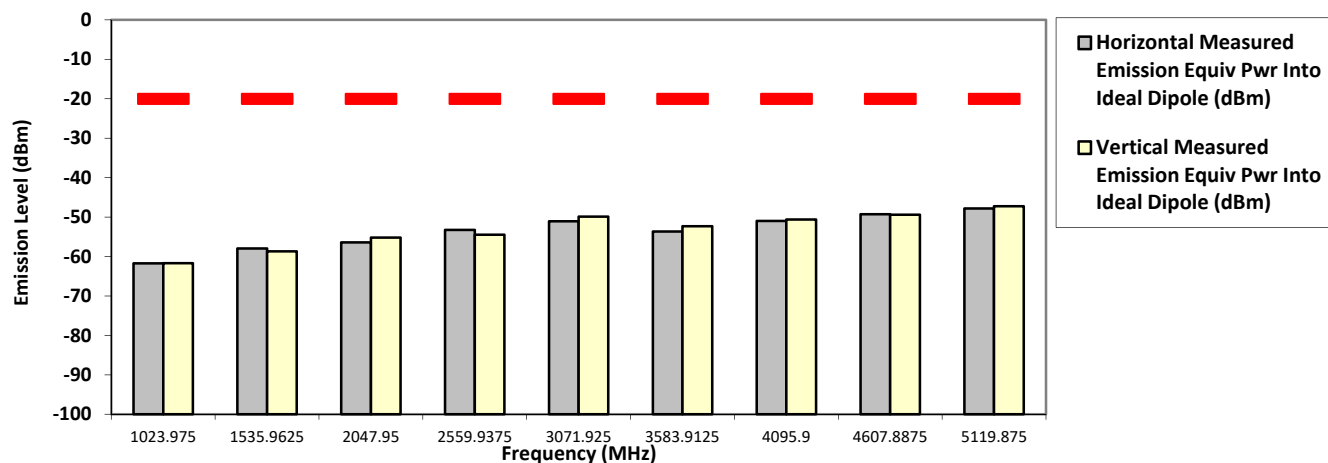

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


511.987500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-60.6006 **	-61.6551 **
1535.9625	-20.0000	-60.2235 **	-58.7331 **
2047.9500	-20.0000	-55.1968 **	-55.8271 **
2559.9375	-20.0000	-54.2469 **	-53.5830 **
3071.9250	-20.0000	-51.7092 **	-52.2291 **
3583.9125	-20.0000	-52.8526 **	-51.3592 **
4095.9000	-20.0000	-50.9408 **	-50.0846 **
4607.8875	-20.0000	-49.3640 **	-50.0809 **
5119.8750	-20.0000	-47.7961 **	-48.1693 **

RADIATED SPURIOUS EMISSIONS

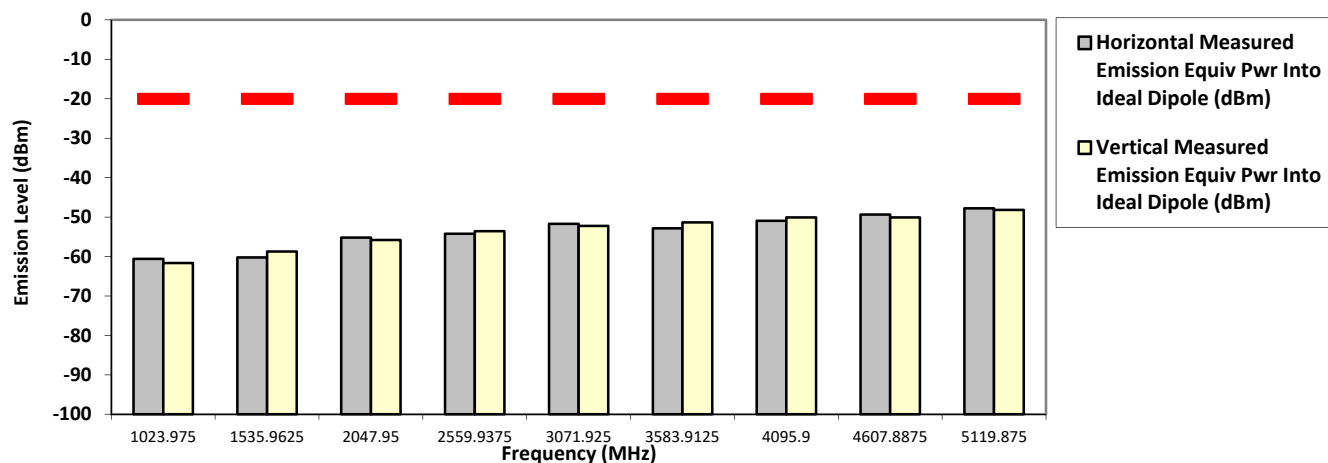

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin

Sat, 3 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: AAM28TRN9RA1AN **S/N: 511TYH6803** **SR:33781-EMC-00012**
Battery Part No: NA **Accy Part No: RMN5127C-C5, HKN4192C-C1**
Test Mode: TX Digital
526.987500 MHz (Not for FCC review) **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1053.9750	-20.0000	-62.7753 **	-63.0480 **
1580.9625	-20.0000	-60.1649 **	-60.2304 **
2107.9500	-20.0000	-56.6501 **	-55.6576 **
2634.9375	-20.0000	-54.2425 **	-54.5888 **
3161.9250	-20.0000	-51.5329 **	-51.9541 **
3688.9125	-20.0000	-52.6081 **	-53.0209 **
4215.9000	-20.0000	-51.6034 **	-50.7771 **
4742.8875	-20.0000	-48.6707 **	-49.8502 **
5269.8750	-20.0000	-48.3769 **	-47.5871 **

RADIATED SPURIOUS EMISSIONS

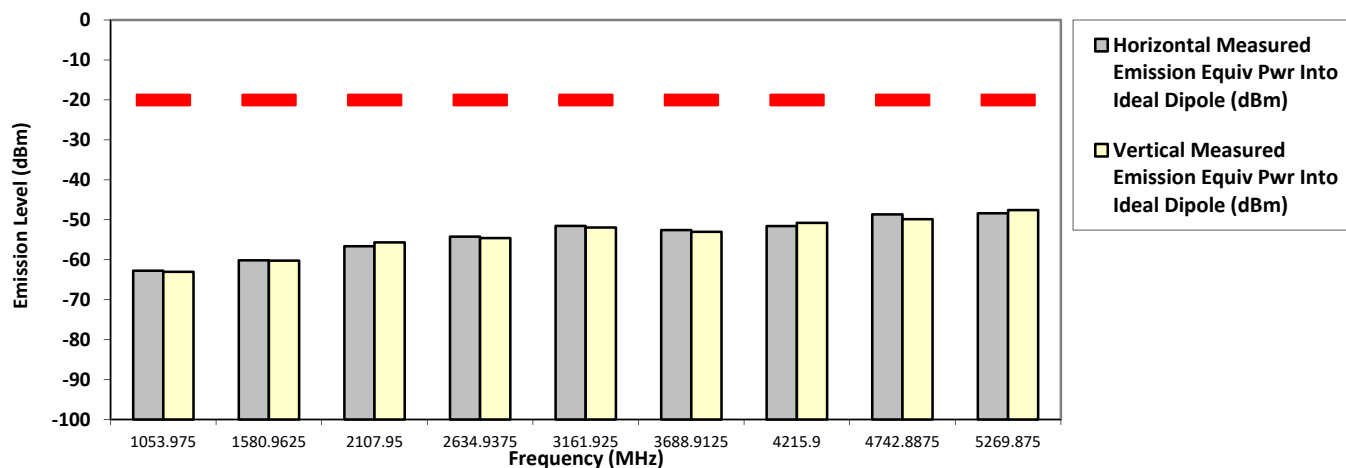

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman&Nazrin Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28TRN9RA1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TYH6803

SR:33781-EMC-00012

Accy Part No: RMN5127C-C5, HKN4192C-C1

Test Mode: TX Digital


526.987500 MHz (Not for FCC review)

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1053.9750	-20.0000	-60.4145 **	-61.7618 **
1580.9625	-20.0000	-59.6977 **	-59.8057 **
2107.9500	-20.0000	-48.3600 *	-45.7100 *
2634.9375	-20.0000	-54.0178 **	-53.4407 **
3161.9250	-20.0000	-49.7247 **	-50.3087 **
3688.9125	-20.0000	-52.3420 **	-51.0790 **
4215.9000	-20.0000	-50.9681 **	-49.6883 **
4742.8875	-20.0000	-47.3303 **	-47.6678 **
5269.8750	-20.0000	-35.1300 *	-35.9500 *

RADIATED SPURIOUS EMISSIONS

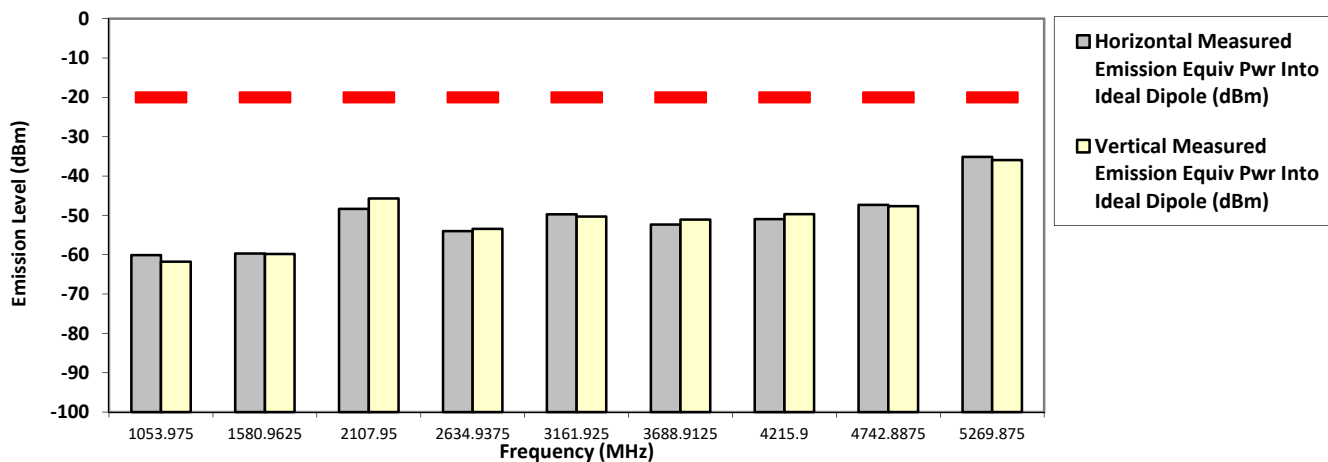

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Aiman&Nazrin

Fri, 2 Sep, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 70.6

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Effective Radiated Power (ERP)

6.11.1. Test Setup

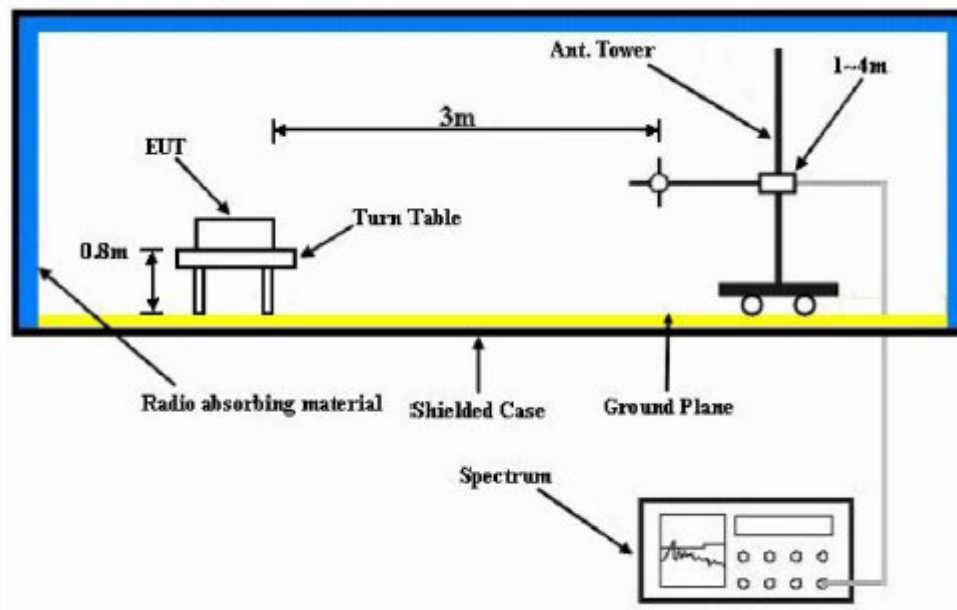

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

6.11.2. Test Result

Part 80 EIRP/ERP

SRID: 33781-EMC-00018

S/N: 511TYH6803

Channel Spacing: 25kHz

Accessory: PMAE4034A

Tx Measured Conducted Power: 1.99 Watts

Modulation: Analog

Battery: NA


Antenna Polarization	Frequency (MHz)	EIRP (dBm)	ERP (dBm)	ERP (Watts)	Limit (Watts)	Result
Vert.	467.7750	34.51	32.36	1.7218	2	PASS

6.11.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.12. GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

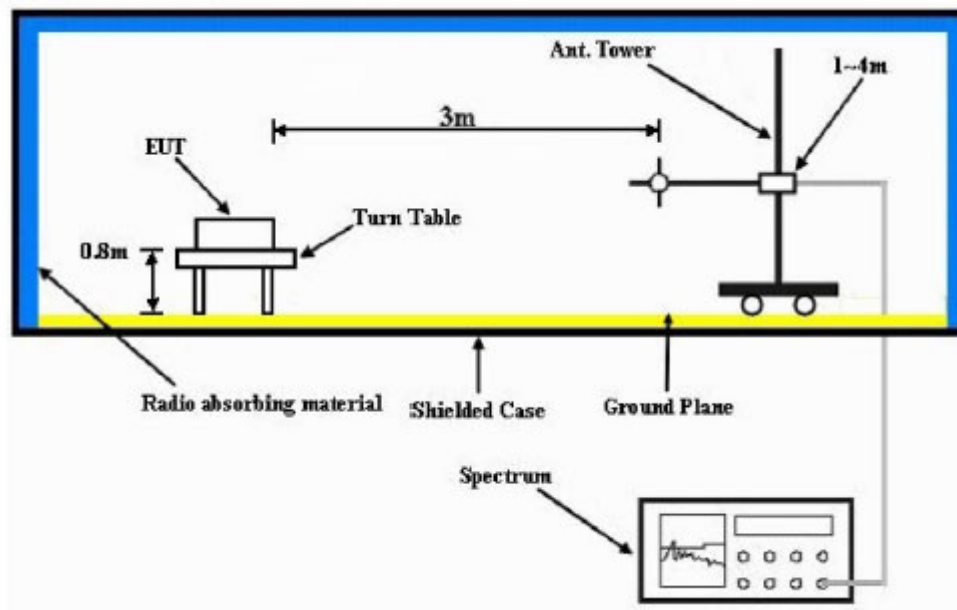

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.1. Test Result

Not Applicable.

6.12.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~