

	  
<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b> Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.</p>	<p><b>FCC/ISED TEST REPORT</b> <b>Report Revision : Rev.B</b></p>
<p><b>Date/s Tested</b> : 20-FEB-2024 - 11-MAR-2024 <b>Report Issue Date</b> : 02-MAY-2024 <b>Manufacturer</b> : Motorola Solutions Malaysia SDN BHD <b>Manufacturer Address</b> : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia <b>Requestor</b> : HOMICIL HARLY <b>Product Type</b> : Hand-held <b>Product Version (PMN)</b> : APX N70 <b>Model Number (HVIN)</b> : H35XDT9PW8AN &amp; H35XDT9PW8AN-H <b>Frequency Band</b> : 380-520MHz <b>Max RF Output Power</b> : 5.7 Watts <b>Applicant Name</b> : Motorola Solutions Inc <b>Applicant Address</b> : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia. <b>ISED Registrations</b> : MY0001 <b>FCC Registrations</b> : 461337 <b>Firmware Version (FVIN)</b> : D02.76.02</p> <p><b>The equipment was tested accordance to the requirement listed below:</b></p> <p><b>(LMR )</b> <b>FCC 47 CFR Part 22 / 74 / 80 / 90</b> <b>PASS</b> <b>ISED RSS- Gen Issue 5 / 119 Issue 12</b></p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:</p>  <hr/> <p><b>Farah Nur Arina</b> <b>Test Personnel</b></p>	<p>Approved Signatory:</p>  <hr/> <p><b>Maheshvaran A/L Rajagopal</b> <b>Responsible Engineer</b></p>

# Table of Contents

Report Revision History .....	3
1.0 General Information.....	4
2.0 Summary of Test Results .....	4
3.0 Measurement Uncertainty.....	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions .....	10
6.0 Transmitter Test Parameters .....	11
6.1. RF Output Power .....	11
6.1.1. Test Setup .....	11
6.1.2. Test Result .....	11
6.2. Frequency Stability .....	12
6.2.1. Test Setup .....	12
6.2.2. Test Result .....	13
6.2.3. Test Limit.....	14
6.3. Modulation Characteristics .....	15
6.3.1. Test Setup .....	15
6.3.2. Test Result .....	16
6.3.3. Test Limit.....	18
6.4. Modulation Limiting.....	19
6.4.1. Test Setup .....	19
6.4.2. Test Result .....	20
6.4.3. Test Limit.....	21
6.5. Occupied Bandwidth.....	22
6.5.1. Test Setup (Analog).....	22
6.5.2. Test Result (Analog).....	23
6.5.3. Test Setup (Digital).....	31
6.5.4. Test Result (Digital).....	32
6.5.5. Test Limit.....	42
6.6. Band Edge Conducted Spurious Emission (Part 22) .....	43
6.6.1. Test Setup (Analog).....	43
6.6.2. Test Result (Analog).....	44
6.6.3. Test Setup (Digital).....	45
6.6.4. Test Result (Digital).....	46
6.6.5. Test Limit.....	47
6.7. Transient Frequency Behavior .....	48
6.7.1. Test Setup .....	48
6.7.2. Test Result .....	49
6.7.3. Test Limit.....	51
6.8. Adjacent Channel Power.....	52
6.8.1. Test Setup (Analog).....	52
6.8.2. Test Result .....	52
6.8.3. Test Setup (Digital).....	53

6.8.4. Test Result ..... 53  
 6.8.5. Test Limit..... 54  
 6.9. Conducted Spurious Emission ..... 56  
     6.9.1. Test Setup ..... 56  
     6.9.2. Test Result (Analog)..... 57  
     6.9.3. Test Result (Digital)..... 58  
     6.9.4. Test Limit..... 71  
 6.10. Radiated Spurious Emission ..... 89  
     6.10.1. Test Setup ..... 89  
     6.10.2. Test Result (Analog)..... 90  
     6.10.3. Test Result (Digital)..... 101  
     6.10.4. Test Limit..... 121  
 6.11. Effective Radiated Power (ERP) ..... 122  
     6.11.1. Test Setup ..... 122  
     6.11.2. Test Result ..... 123  
     6.11.3. Test Limit..... 123  
 6.12. GNSS (EIRP for 1559 - 1610MHz)..... 124  
     6.12.1. Test Setup ..... 124  
     6.12.1. Test Result ..... 125  
     6.12.2. Test Limit..... 125

**Report Revision History**

<b>Revision History</b>	<b>Description</b>	<b>Date</b>	<b>Originator</b>
Rev. A	Initial Report	15-Apr-2024	Farah
Rev. B	Updated Emission Designator at Summary of Test Results table	02-May-2024	Farah

## 1.0 General Information

### EUT Description:

<b>Technologies</b>	Land Mobile Radio (LMR)
<b>Modulation Type</b>	Analog, C4FM, Phase II

The EUT contains following accessory devices and data cable:

<b>Item</b>	<b>Brand</b>	<b>Model or P/N</b>
UL 3650mAH (using RN 2170 Li-Ion cell)	MOTOROLA	PMNN4818A
UHF Whip 380-520MHz 380 - 520 MHz	MOTOROLA	AN000452A01

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

#### **ANSI C63.26-2015**

No modifications were done to the UUT to facilitate the tests in this report.

### Deviation from standard

Not applicable as no deviation from standard test method

### Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

### Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

## 2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046(a), 22.565(f), 74.461, 80.215	RSS-119	RF Power Output	Pass		022TAB0435
2.1055, 22.355, 74.464, 80.209	RSS-119	Frequency Stability	Pass		022TAB0435
2.1047	-	Audio Frequency Response	Pass		022TAB0435
2.1047	-	Audio Low Pass Filter Response	Pass		022TAB0435
2.1047, 74.463, 80.213	-	Modulation limiting	Pass		022TAB0435
2.1049, 22.359, 90.21, 74.462, 80.211(b), (c)	RSS-119	Occupied Bandwidth	Pass	20K0F1E – 10.3724 kHz 16K0F3E – 14.9564 kHz 11K0F3E – 9.9207 kHz 8K10F1D – 7.9707 kHz 8K10F1E – 6.9164 kHz 8K10F1W – 8.0028 kHz	022TAB0435
2.1051, 22.359 (a), (b)	-	Band Edge Conducted Spurious Emission	Pass		022TAB0435
90.214	RSS-119	Transient Frequency Behavior	Pass		022TAB0435
90.543(a), (b)	RSS-119	Adjacent Channel Power	NA	NA	NA
2.1051, 22.359, 90.210, 74.462(c), 80.211(c)	RSS-119	Conducted Spurious Emissions	Pass	Worst case: -39.08 dBm	022TAB0435
2.1051, 22.359, 74.462(c), 80.211(c)	RSS-119	Radiated Spurious Emission	Pass	Worst case: -51.51 dBm (margin: 31.51 dBm)	022TAB0402
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	Pass		022TAB0352

NA → Not Applicable

**NOTE1: Selection of test parameters, the report contain a limited number of parameters deemed to be influenced by the relevant design changes, as agreed with the applicant.**

### 3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB $\mu$ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB $\mu$ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

#### 4.0 Equipment List

##### FCC Analog ATE#1: (SW version: FCC\_Analog\_v2.5.0)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	04-Mar-24	04-Mar-25
POWER SUPPLY	6032A	3232A08410	20-Jun-23	20-Jun-24
CXA SIGNAL ANALYZER	N9000B	MY60251574	20-May-23	20-May-24
AUDIO ANALYZER	U8903B	MY61070005	21-Jun-23	21-Jun-24
POWER SENSOR	E4412A	MY50000141	21-Aug-23	21-Aug-24
POWER METER	E4416A	GB41293747	03-Nov-23	03-Nov-24
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

**FCC Transient ATE #1: (SW version: FCC Transient ATE\_Rev1.2.1)**

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	NA	NA
SWITCH DRIVER	11713A	3748A09090	NA	NA
POWER SENSOR	E9301B	MY50180003	20-Jun-23	20-Jun-24
STEP ATTENUATOR	8496G	MY52300757	20-Jun-23	20-Jun-24
SIGNAL GENERATOR	8657A	3250A05137	22-Jun-23	22-Jun-24
MODULATION ANALYZER	8901B	3749A05886	26-Sep-23	26-Sep-24
ATTENUATOR	8494G	MY52300115	20-Aug-23	20-Aug-24
POWER SUPPLY	6031A	3313A02714	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4443A	MY46181974	01-Dec-23	01-Dec-24
POWER METER	E4416A	GB41293866	09-Jan-24	09-Jan-25
AUDIO ANALYZER	8903B	3011A12380	29-Dec-23	29-Dec-24
CXA SIGNAL ANALYZER	N9000B	MY60250530	12-Dec-23	12-Dec-24
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

**FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE\_rev1.23.05)**

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	NA	NA
INTERFACE BOX - FILTER	NA	CS001	NA	NA
POWER SUPPLY	6031A	3506A03271	04-Oct-23	04-Oct-24
SPECTRUM ANALYZER	E4440A	MY46186938	20-Oct-23	20-Oct-24
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

**RADIATED EMISSION ATE #1**

Description	Model #	Serial Number	Calibration Date	Calibration Due Date
EMI TEST RECEIVER	ESIB40	100307	19-Sep-23	19-Sep-24
3m Semi-anechoic Chamber	NA	888032	NA	NA
TURNTABLE FLUSH MOUNT 2M	T-200-S	NA	NA	NA
PROGRAMMING CONTROLLER	MF-7802BS	NA	NA	NA
POWER SUPPLY	6032A	2615A01178	18-Jun-23	18-Jun-24
SIGNAL ANALYZER	FSV40	101432	10-Aug-23	10-Aug-24
DATA LOGGER	SDL500	A.016800	21-Jun-23	21-Jun-24
BILOG ANTENNA	CBL6112D	55546	23-Mar-23	23-Mar-24
BILOG ANTENNA	CBL 6112B	2964	25-Sep-23	25-Sep-24
DRG HORN FREQ.	SAS-571	719	20-Sep-22	20-Sep-24
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
PREAMPLIFIER	PAM-0118	427	18-Oct-21	18-Oct-24
SIGNAL GENERATOR	SMB100A	182511	04-Jun-21	04-Jun-24
LOOP ANTENNA	6502	00208416	26-Oct-23	26-Oct-24
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	28-Aug-23	28-Aug-24
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.6.5			

## 5.0 Test Condition

### 5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	FM	380.0125, 406.2, 450.025, 459.125, 467.775, 469.9875, 482.0125, 511.0125, 519.9875	Farah	23.4°C, 50%RH
Frequency Stability	Max	FM	467.775	Farah	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	FM	467.775, 459.125	Farah	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	FM	NA	Farah	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	FM	467.775, 459.125	Farah	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	406.2, 450.025, 459.125, 467.775, 473.0125, 511.9875	Farah	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	FM/C4FM/Phase II	459.025, 456.65, 473.0125, 479.2875	Farah	23.4°C, 50%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	467.775	Farah	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA	NA	NA
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	380.0125, 406.2, 450.025, 459.125, 467.775, 482.0125, 511.0125, 519.9875	Farah	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	FM/C4FM/Phase II	380.0125, 406.2, 450.025, 459.125, 467.775, 482.0125, 511.0125, 519.9875	Aiman	23.4°C, 50%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	FM/C4FM/Phase II	NA	NA	NA
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	FM	467.775	Nazrin	23.4°C, 50%RH

NA → Not Applicable

## 6.0 Transmitter Test Parameters

### 6.1. RF Output Power

#### 6.1.1. Test Setup

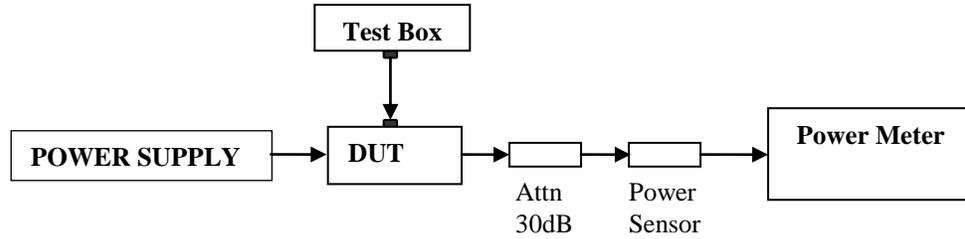


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

#### 6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	7.5V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
380.01250	1.00	1.05	5.70	2.13	Part 80
406.20000	1.00	1.09	5.70	2.11	
450.65000	1.00	0.96	5.66	1.99	
459.12500	1.00	1.00	5.59	2.00	
467.77500	1.00	0.91	5.55	2.00	
467.77500	1.00	1.00	2.00	1.96	
469.98750	1.00	0.96	5.55	2.10	
482.01250	1.00	1.05	5.44	2.03	
511.98750	1.00	0.95	5.68	2.03	
519.98750	1.00	0.91	5.70	1.85	

## 6.2. Frequency Stability

### 6.2.1. Test Setup

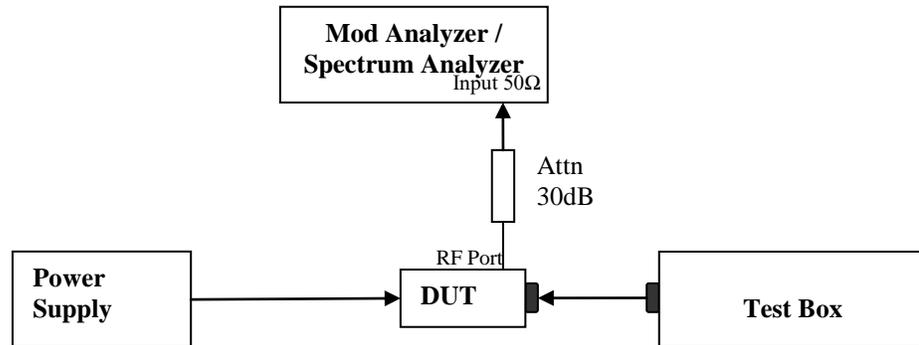


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in  $MCF_{MHz}$ .
- 4) Test in 2 conditions:
  - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
  - Supply Voltage:
    - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
    - Portable: The frequency of the transmitter was measured from nominal  $\pm x\%$  as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left( \frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where:  $MCF_{MHz}$  is the Measured Carrier Frequency in MHz  
 $ACF_{MHz}$  is the Assigned Carrier Frequency in MHz

**6.2.2. Test Result**

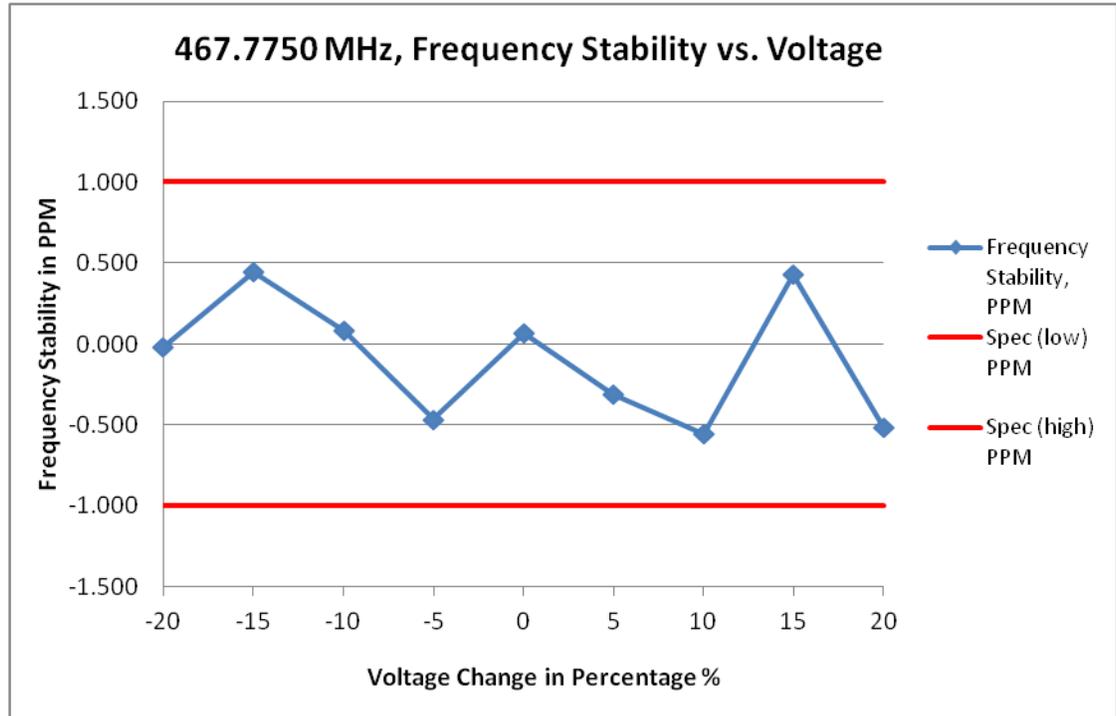

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing		467.7750 MHz / 12.5 kHz			
Temperature, °C		25			
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	4.440	467.774990	-0.021	-1.000	1.000
-15	6.370	467.775209	0.447	-1.000	1.000
-10	6.750	467.775039	0.084	-1.000	1.000
-5	7.120	467.774783	-0.463	-1.000	1.000
0	7.500	467.775032	0.068	-1.000	1.000
5	7.870	467.774854	-0.311	-1.000	1.000
10	8.250	467.774741	-0.554	-1.000	1.000
15	8.620	467.775200	0.428	-1.000	1.000
20	9.000	467.774758	-0.517	-1.000	1.000

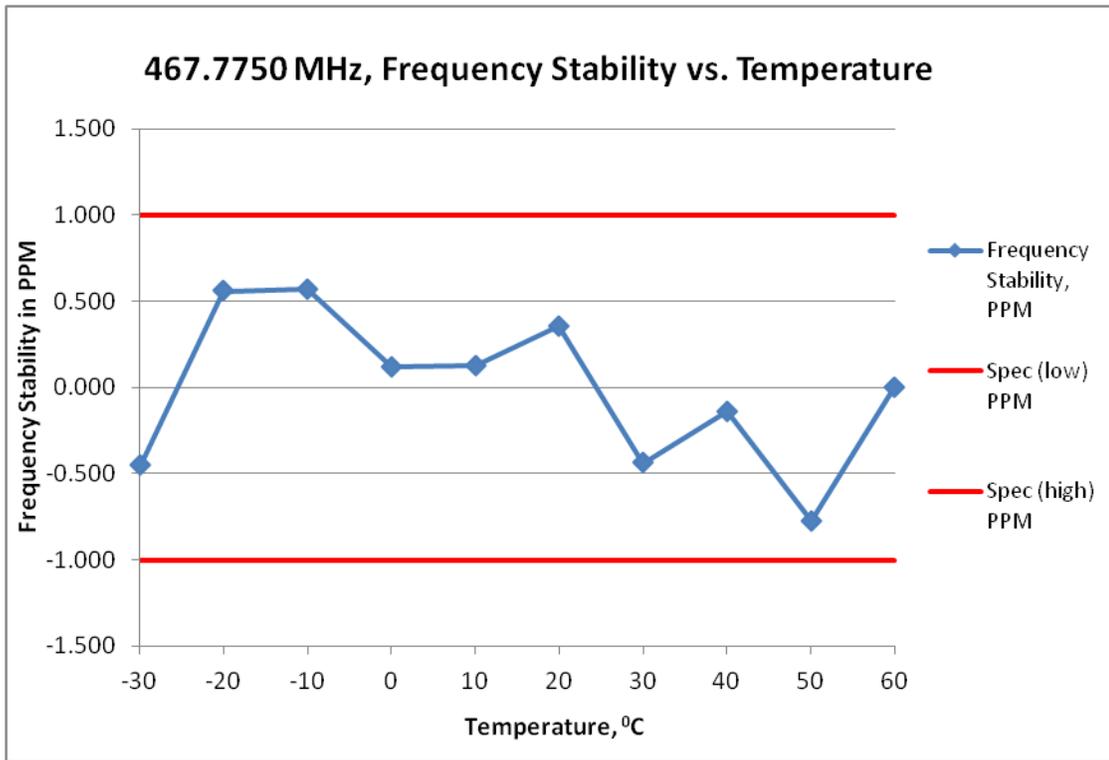

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.774788	-0.454	-1.000	1.000
-20	467.775261	0.559	-1.000	1.000
-10	467.775267	0.570	-1.000	1.000
0	467.775055	0.117	-1.000	1.000
10	467.775060	0.128	-1.000	1.000
20	467.775166	0.354	-1.000	1.000
30	467.774794	-0.441	-1.000	1.000
40	467.774935	-0.140	-1.000	1.000
50	467.774637	-0.776	-1.000	1.000
60	467.774999	-0.001	-1.000	1.000

**6.2.3. Test Limit**

As per manufacturer declared spec +/- 1.0ppm


### 6.3. Modulation Characteristics

#### 6.3.1. Test Setup

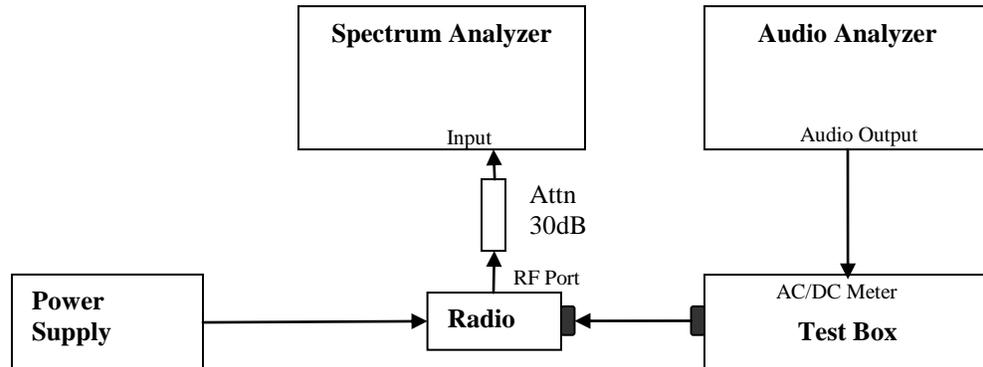



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as 0dB reference
- 6) Vary the audio frequency from 300 Hz to 20 kHz. Record the change in modulation in reference to step 5.

### 6.3.2. Test Result

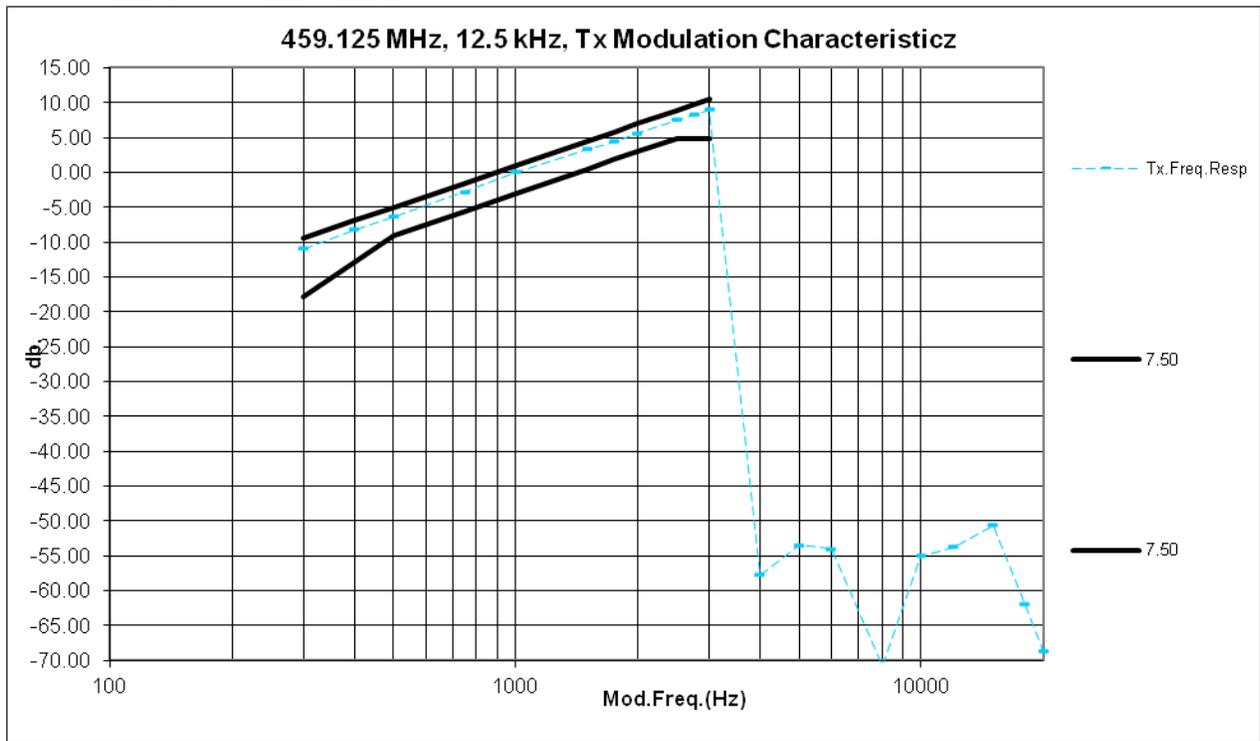


Not for FCC review

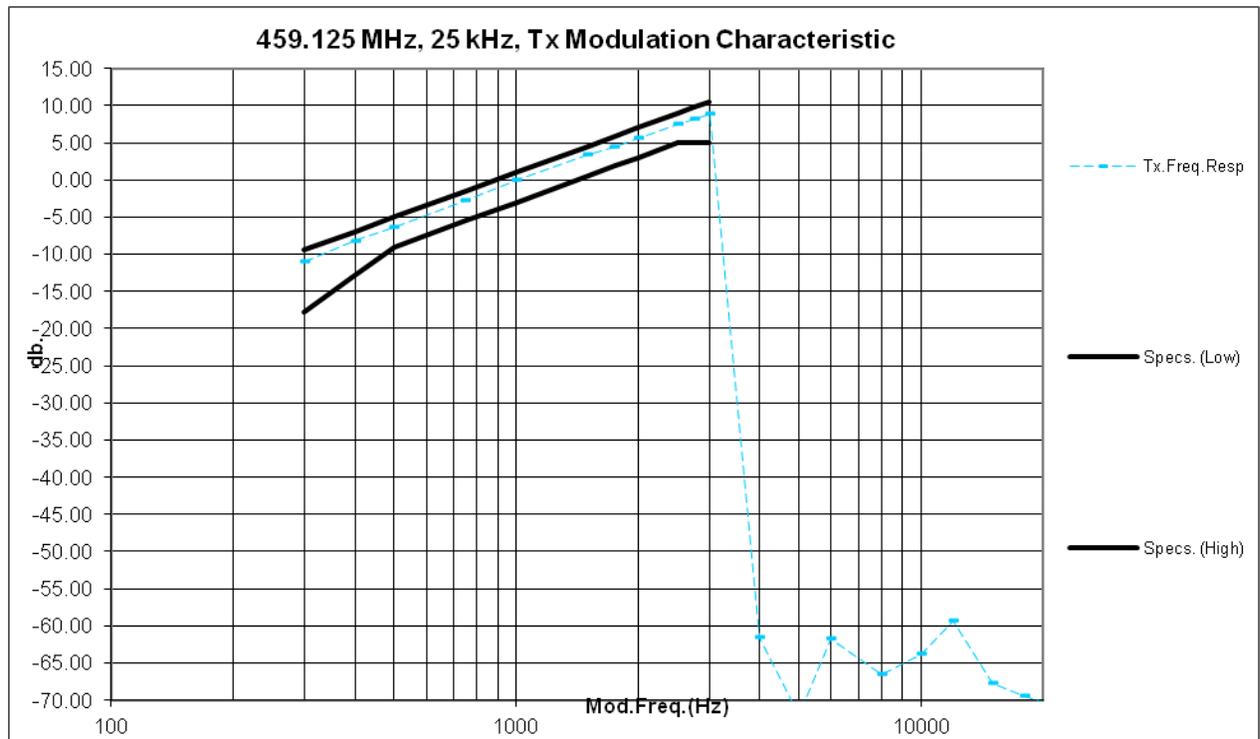


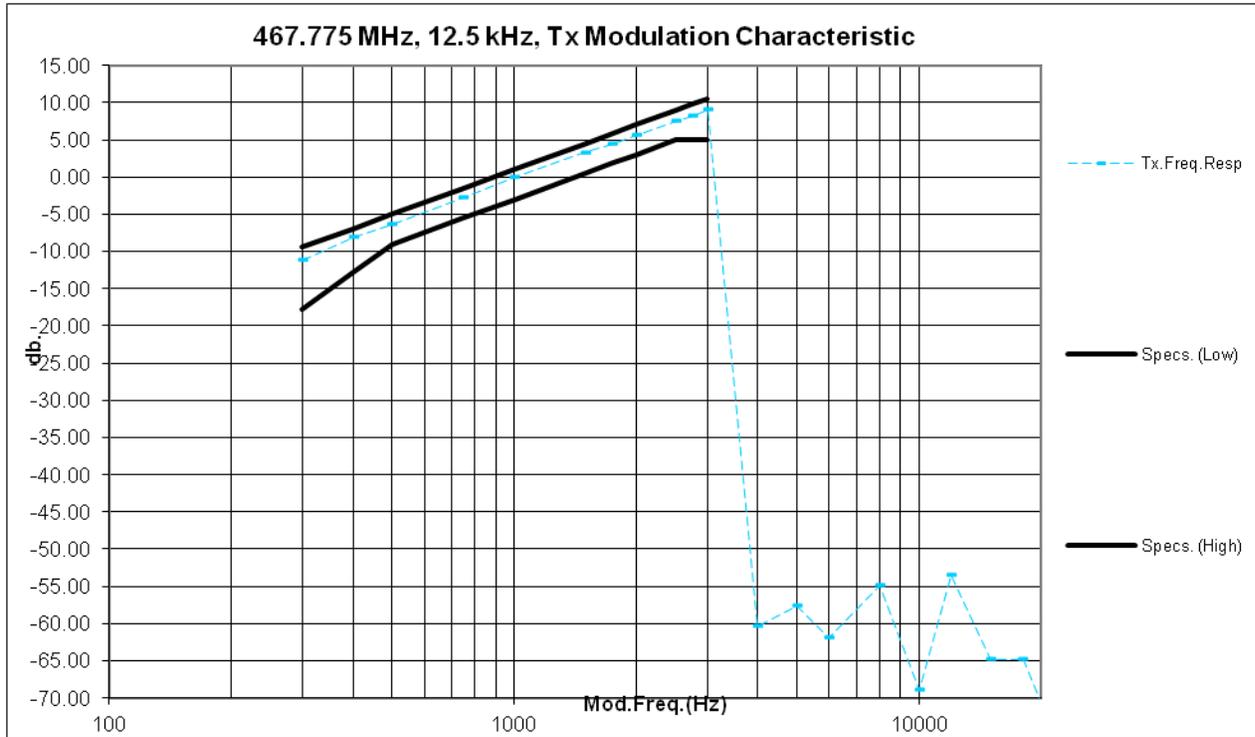

Not for FCC review

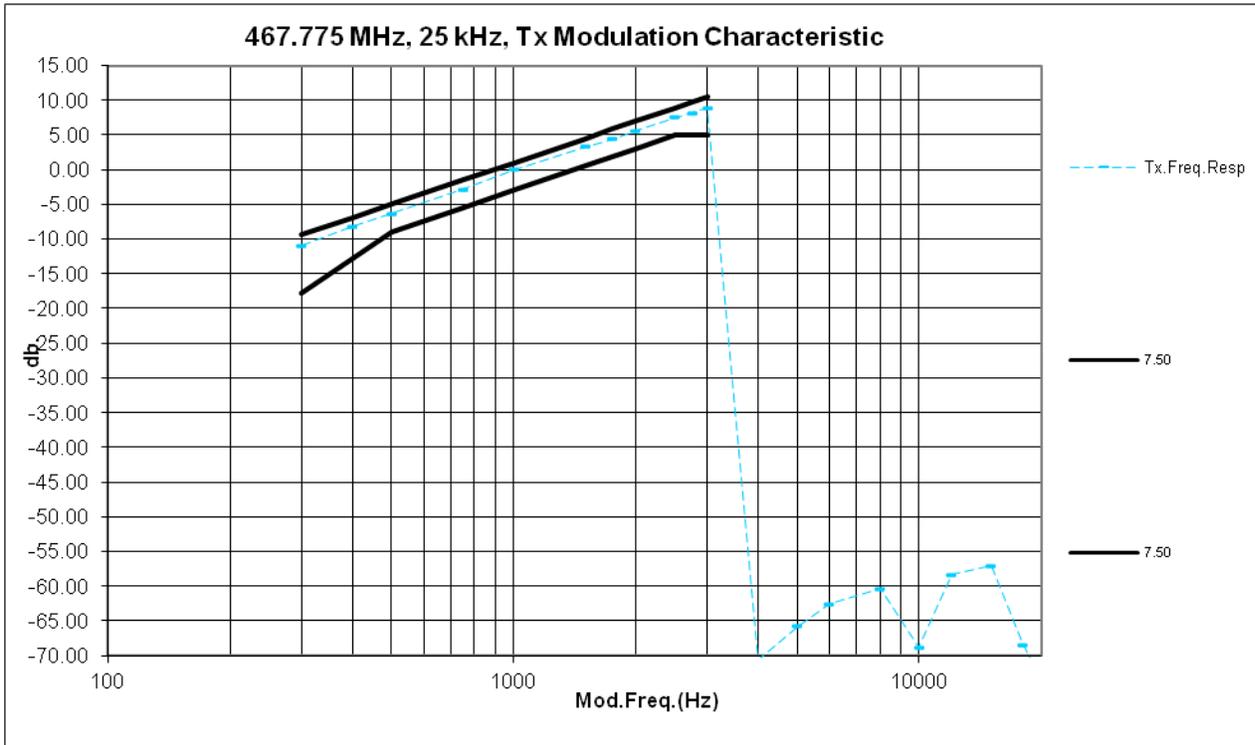

### 6.3.3. Test Limit

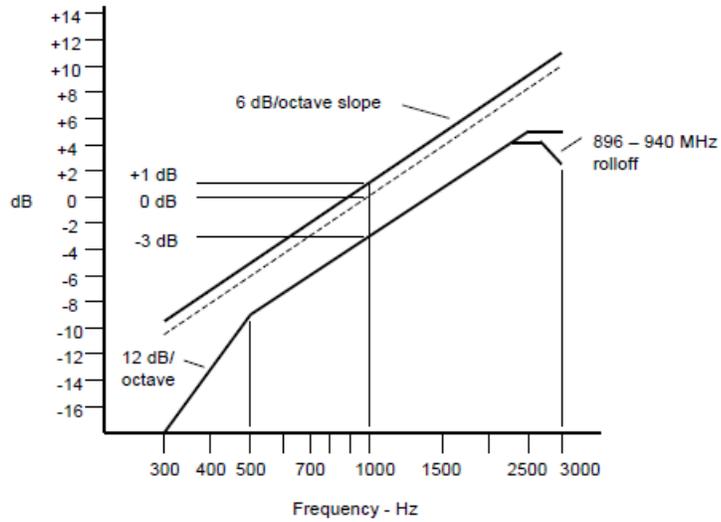


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


## 6.4. Modulation Limiting

### 6.4.1. Test Setup

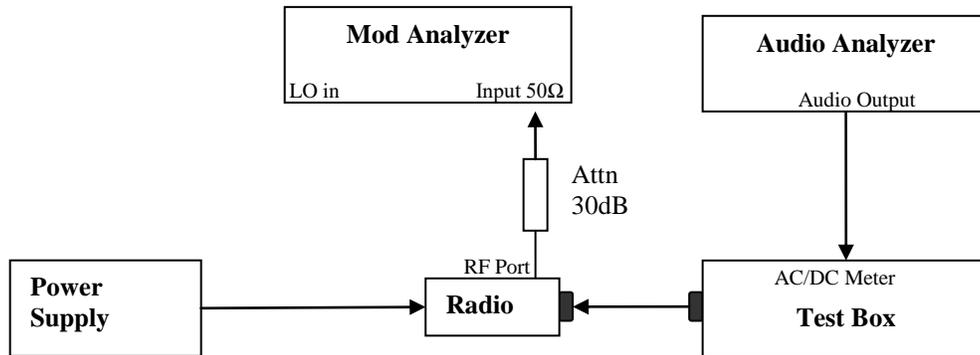



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

### 6.4.2. Test Result

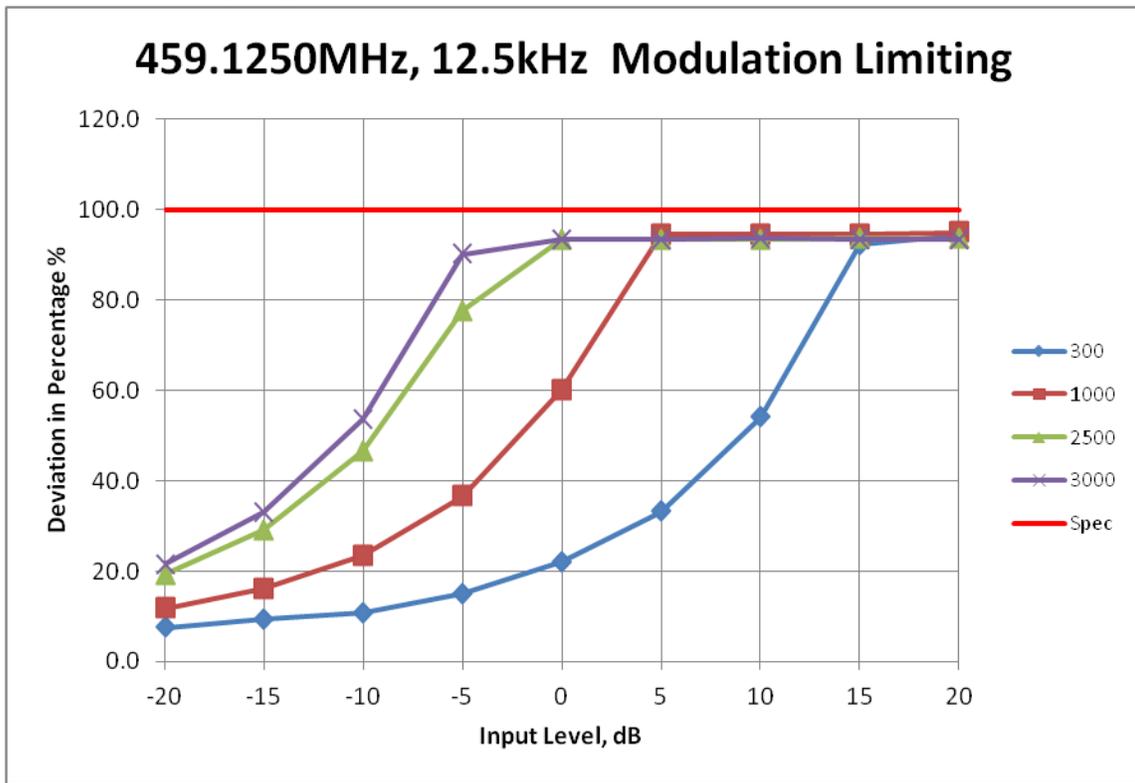


Not for FCC review

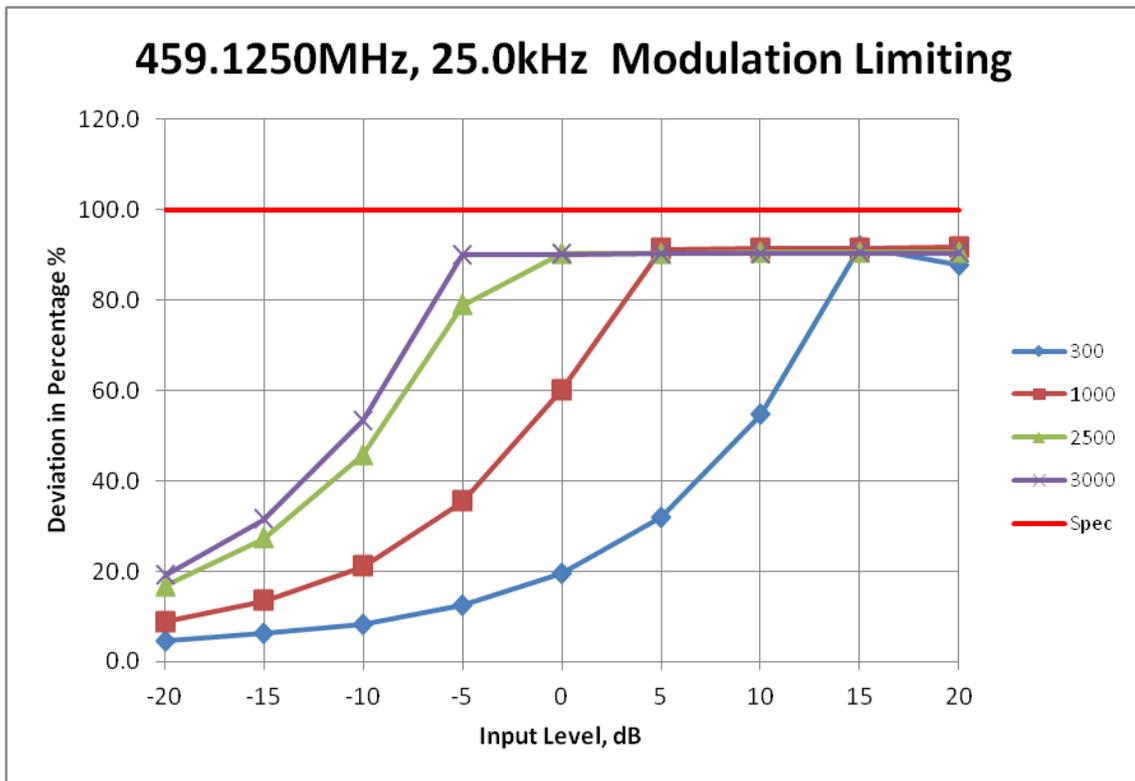

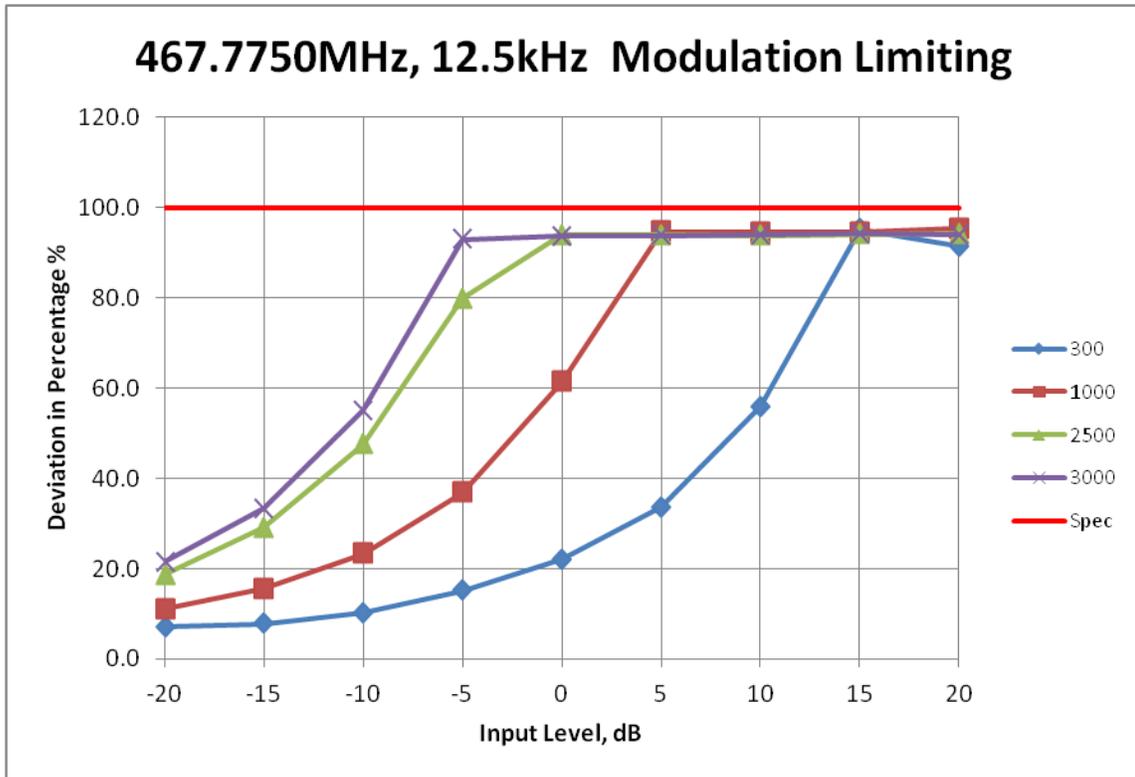


Not for FCC review

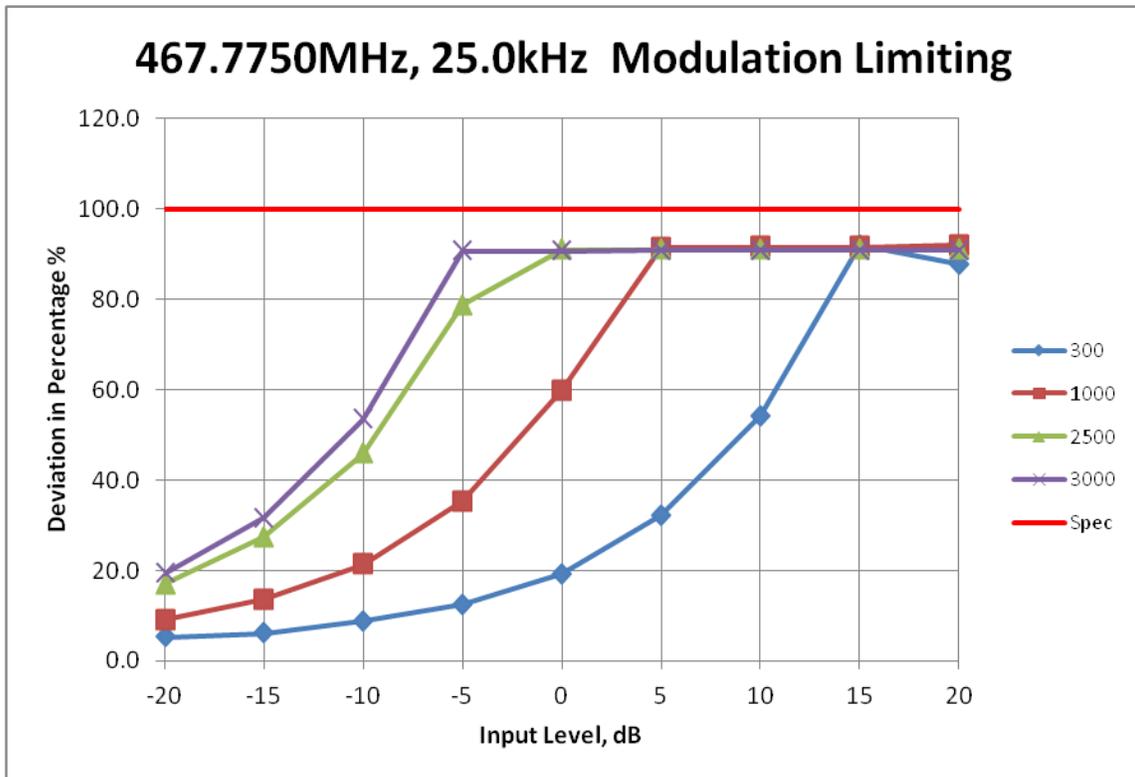

**6.4.3. Test Limit**  
Modulation Limiting shall not exceed 100 percent.

## 6.5. Occupied Bandwidth

### 6.5.1. Test Setup (Analog)

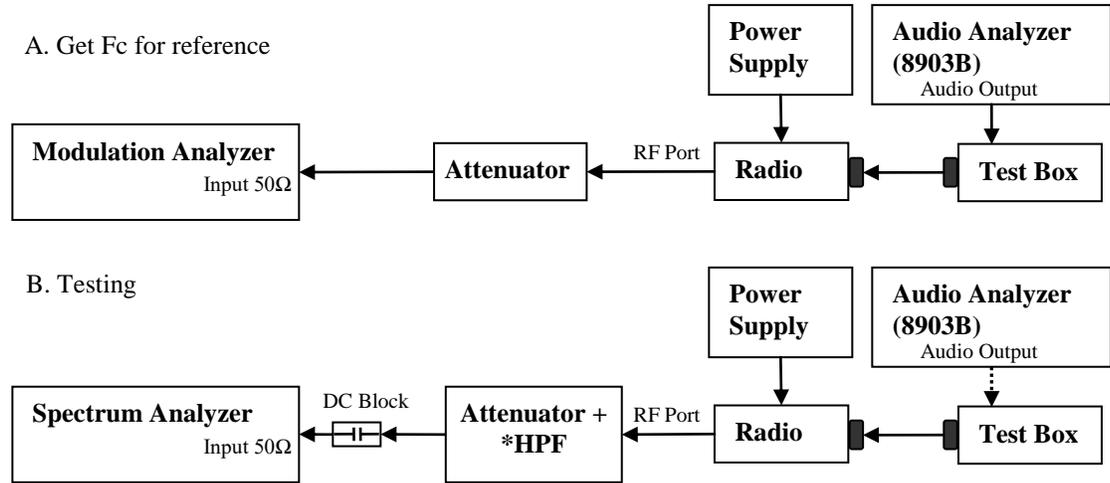

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

\* Only HPF added for Mask 80.211 measurement with attenuator.

\* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

### 6.5.2. Test Result (Analog)

Standard Audio Modulation (25 kHz Channelization, Analog Voice):  
 Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} = 16K0F3E$  portion of the designator indicates voice.


Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E.



Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):  
 Emission Designator 11K0F3E



In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.



$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0F3E$  portion of the designator indicates voice.



Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.


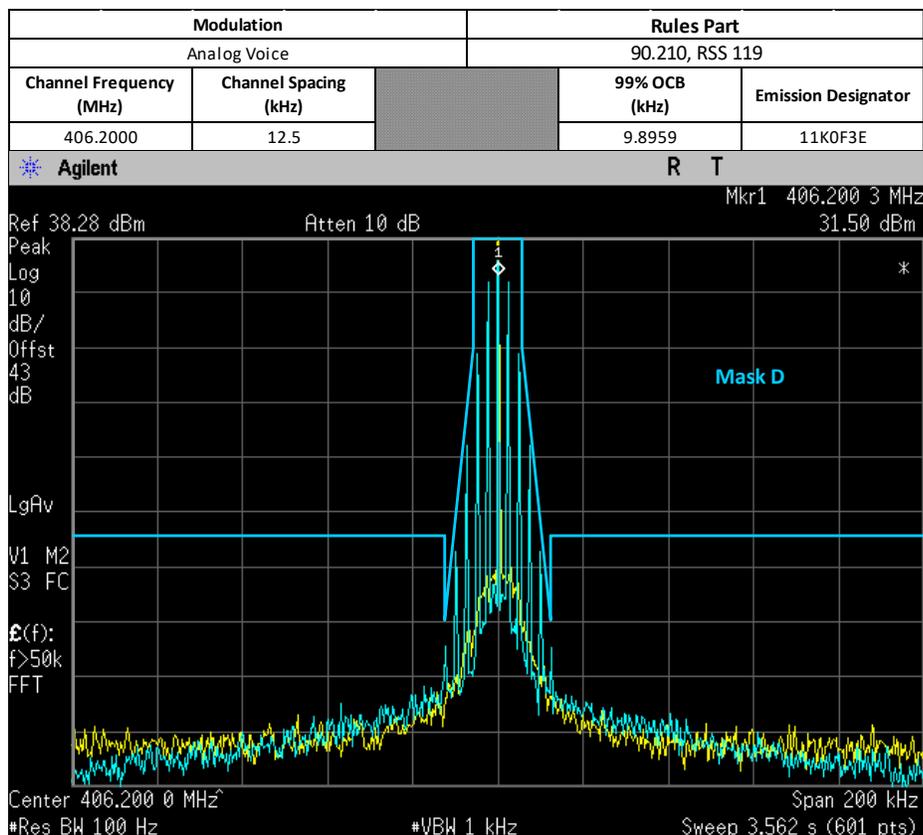


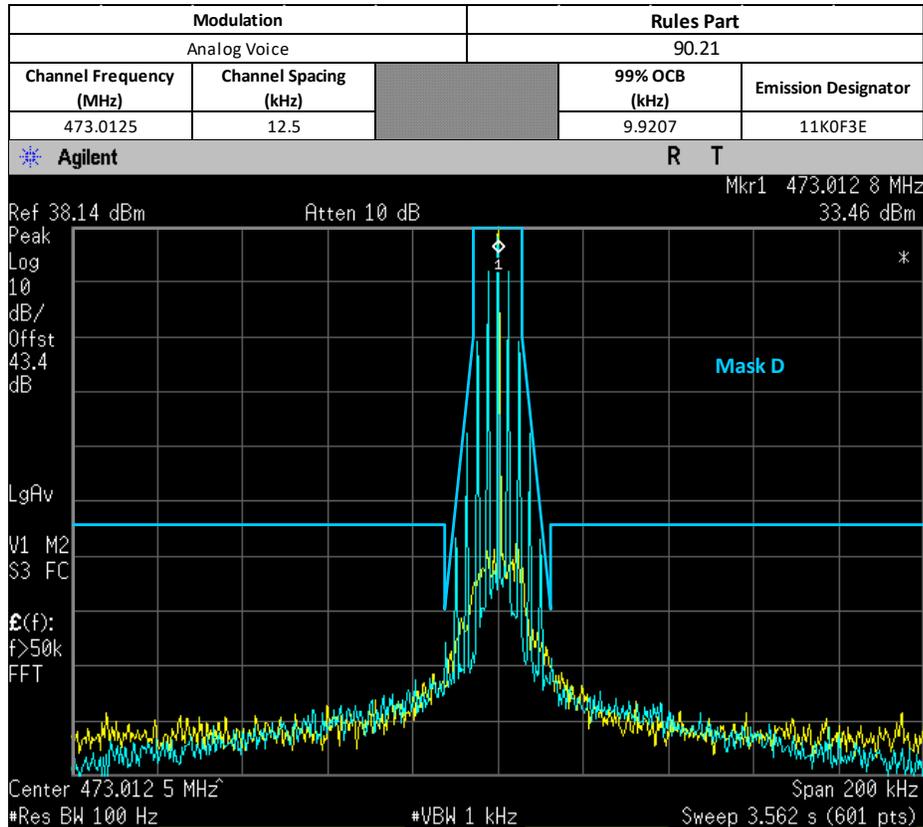
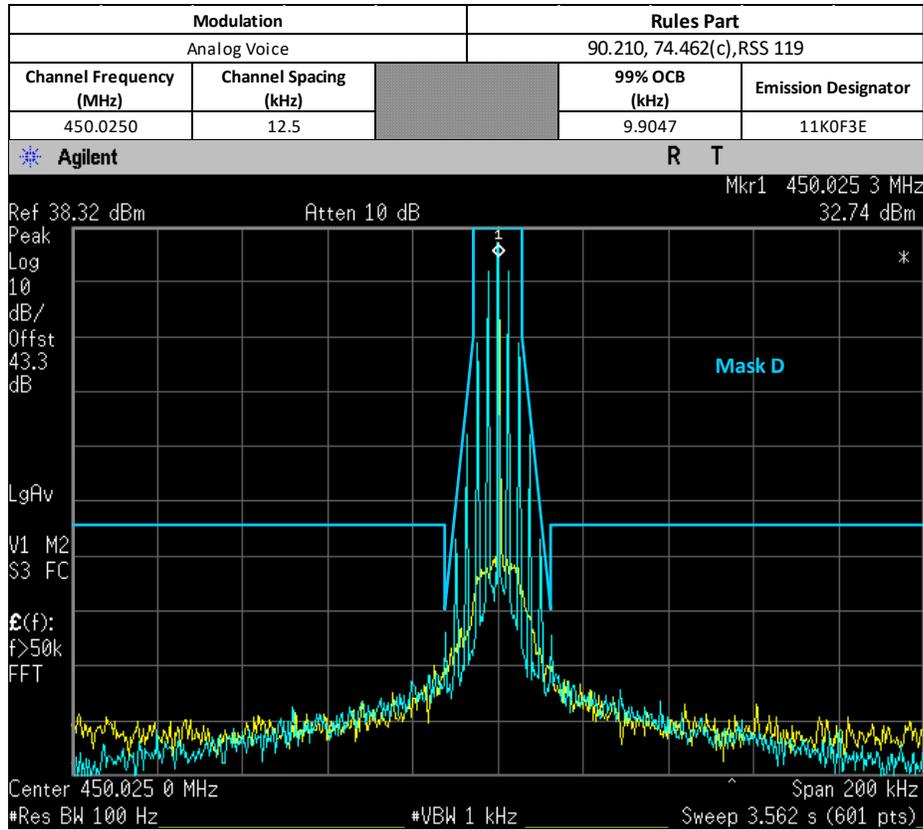


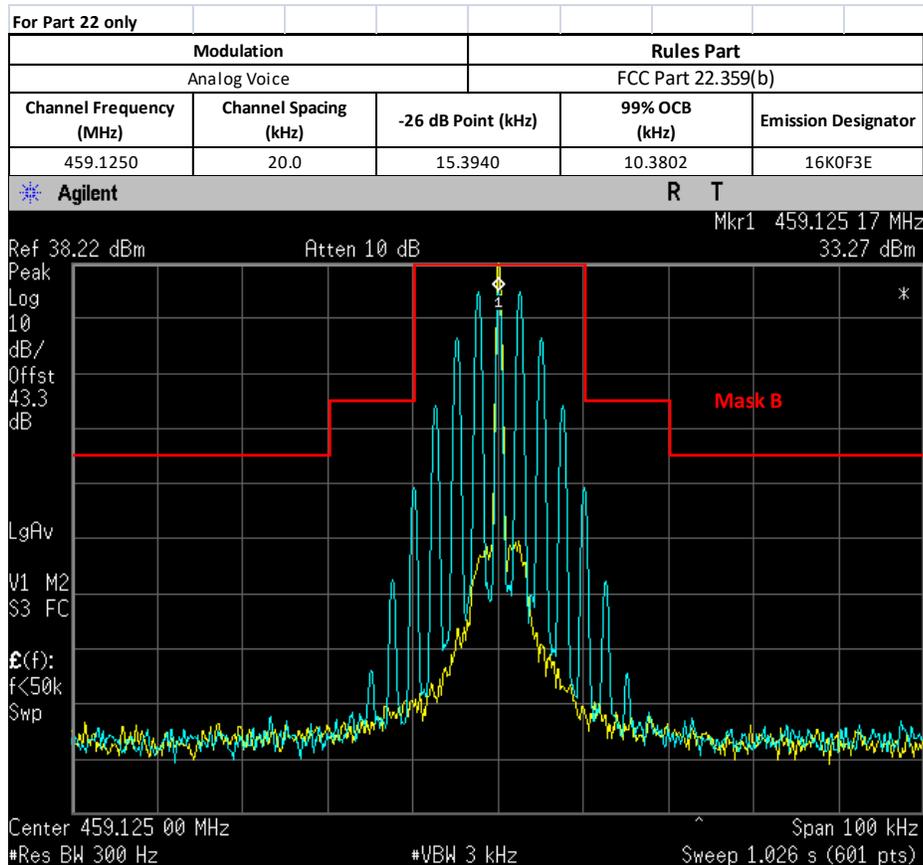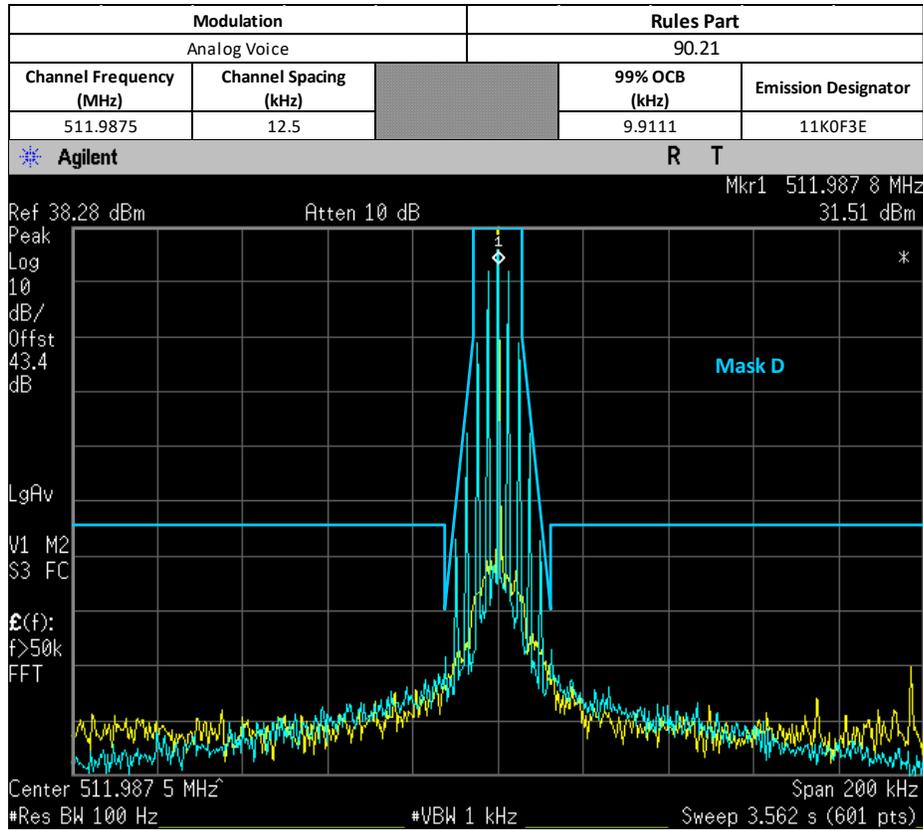

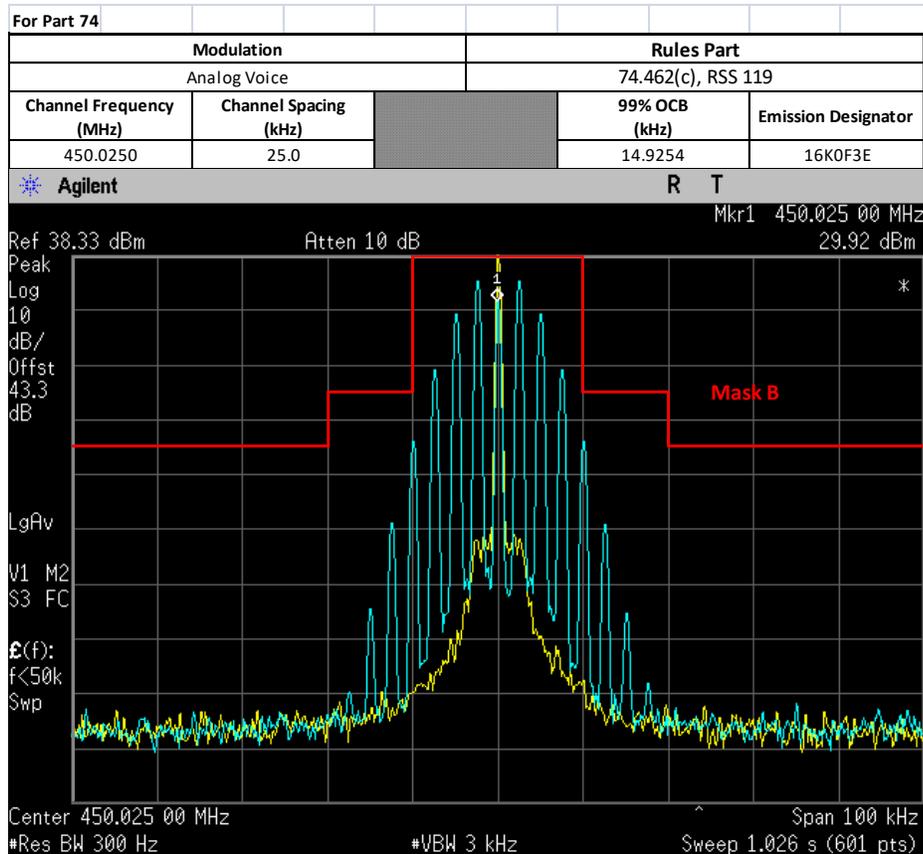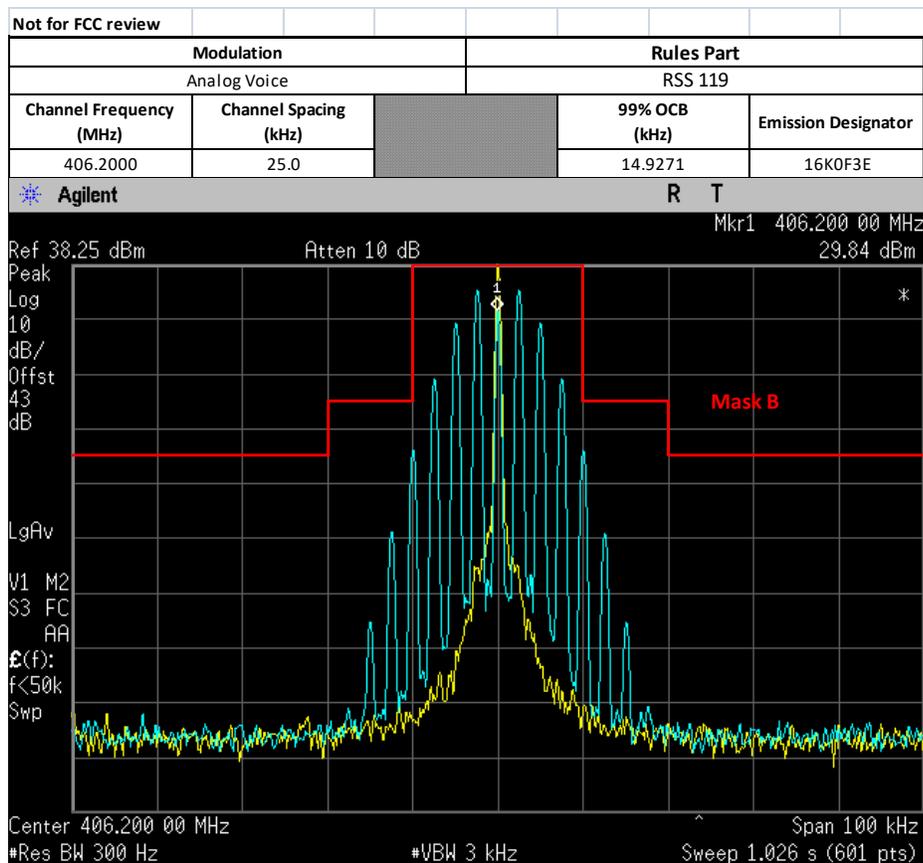


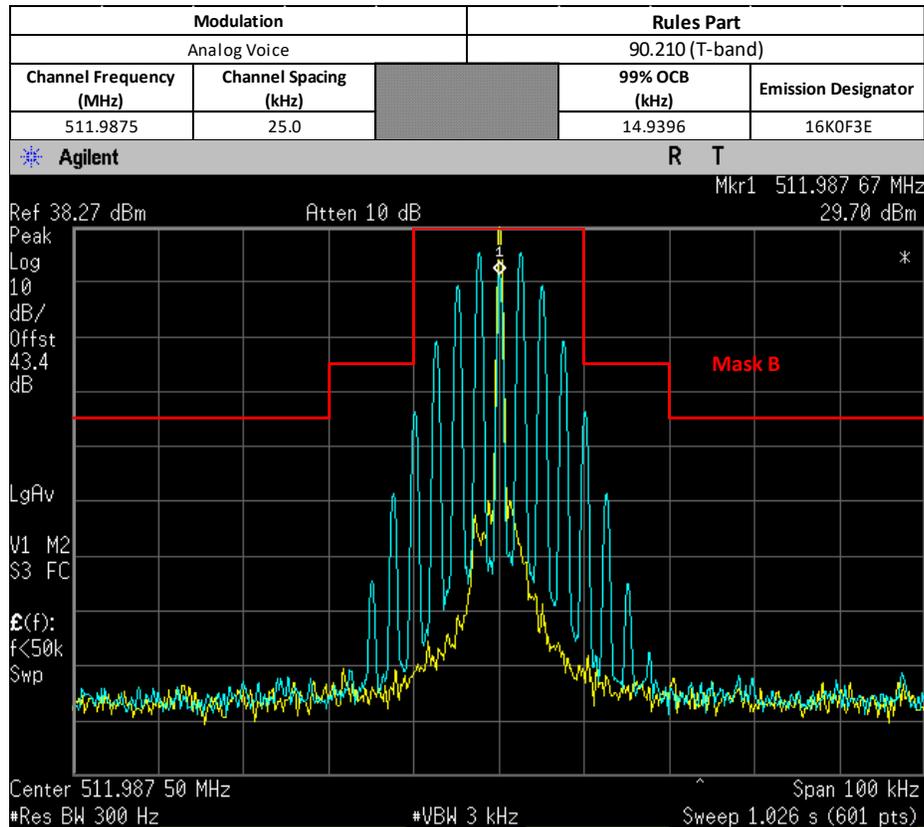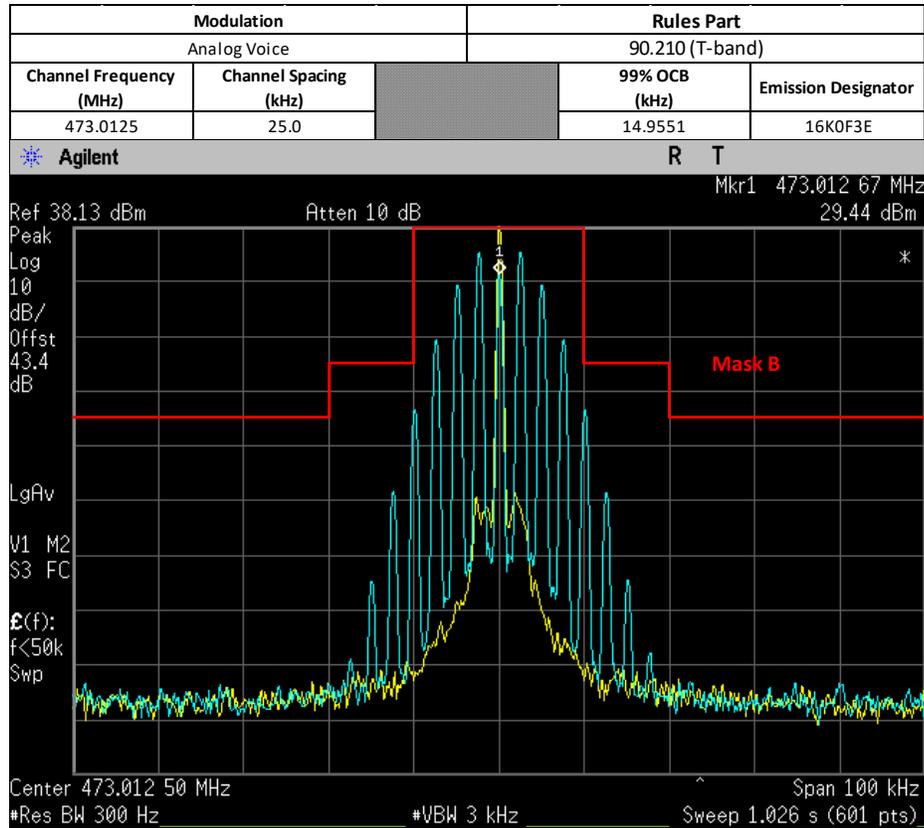

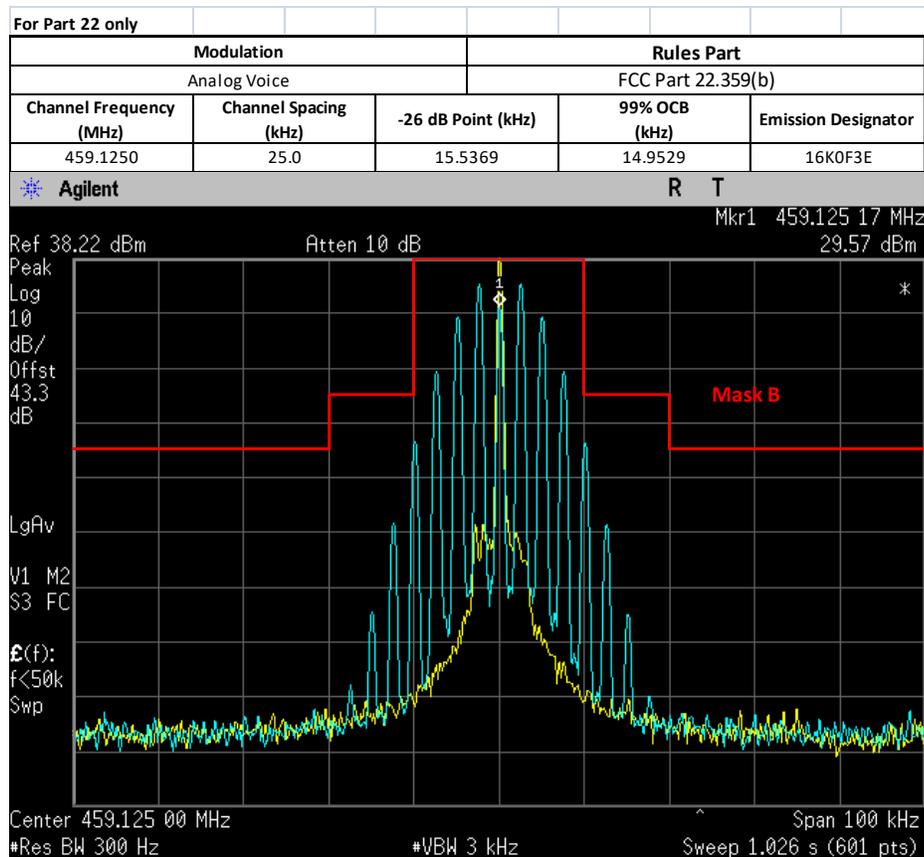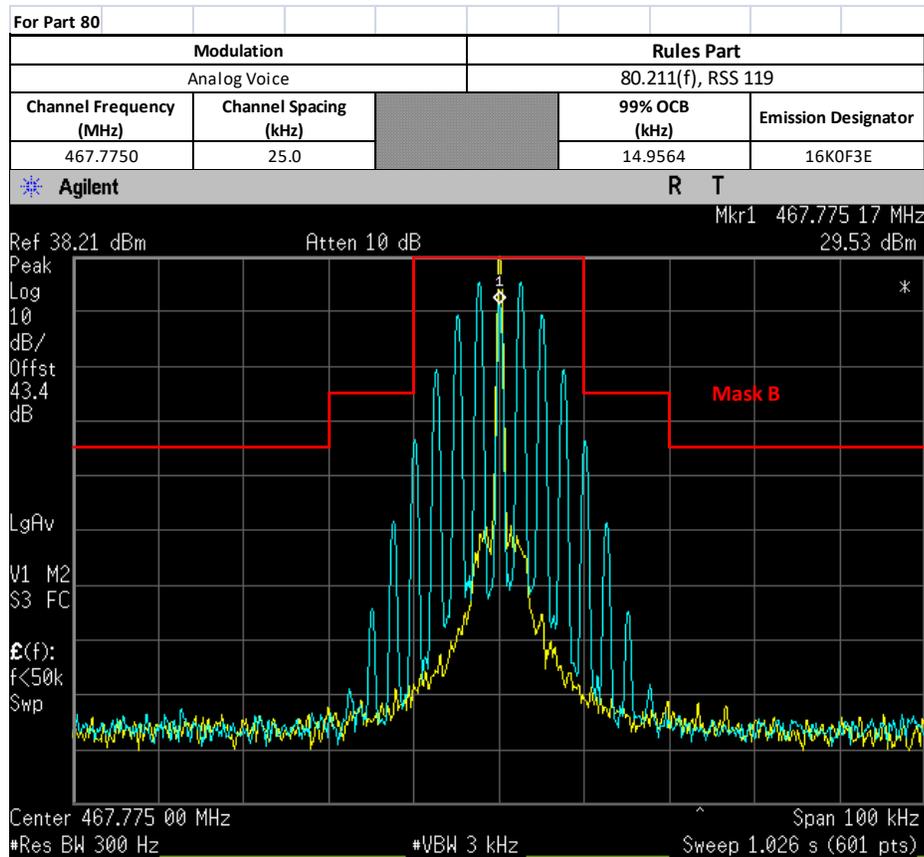


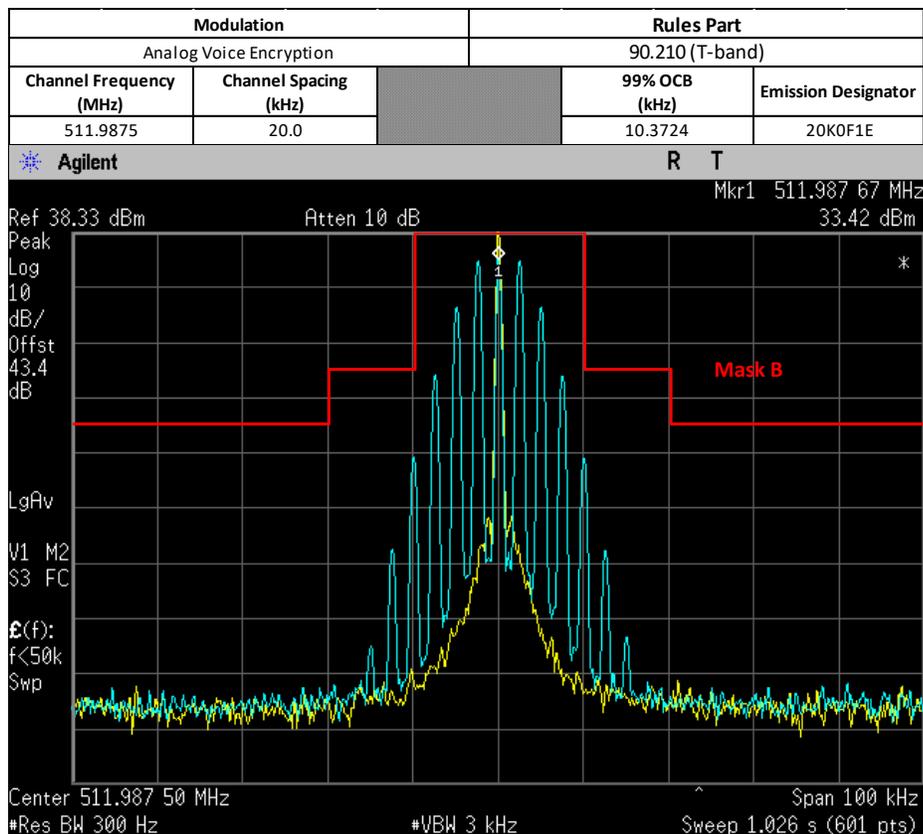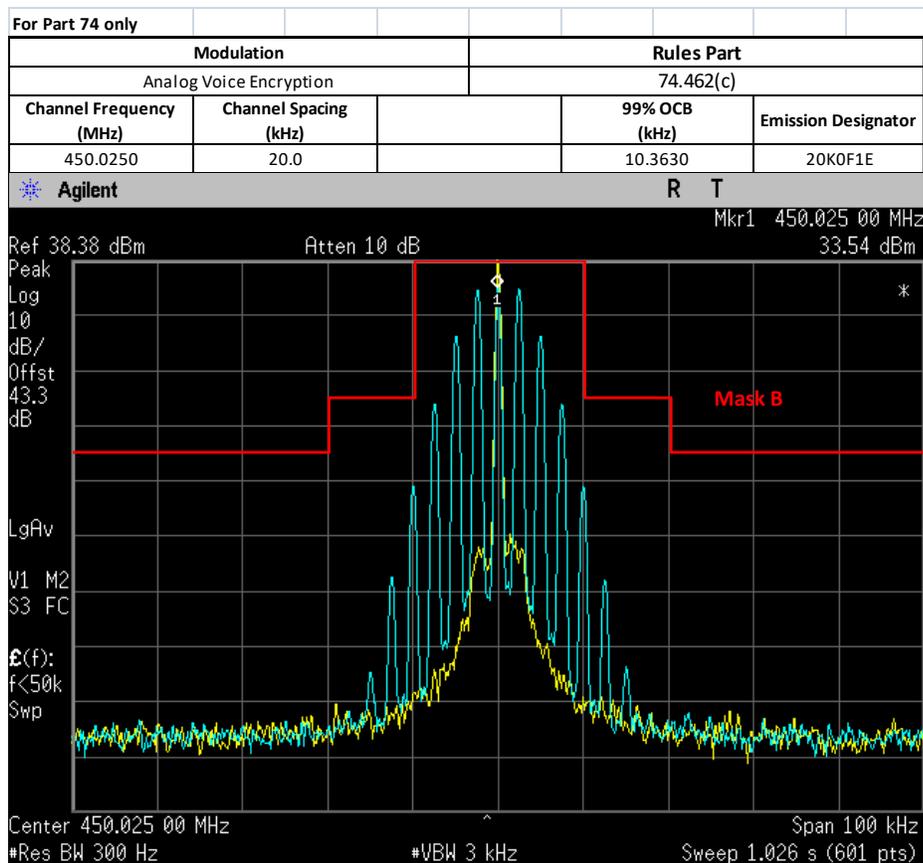

For Part 80 only

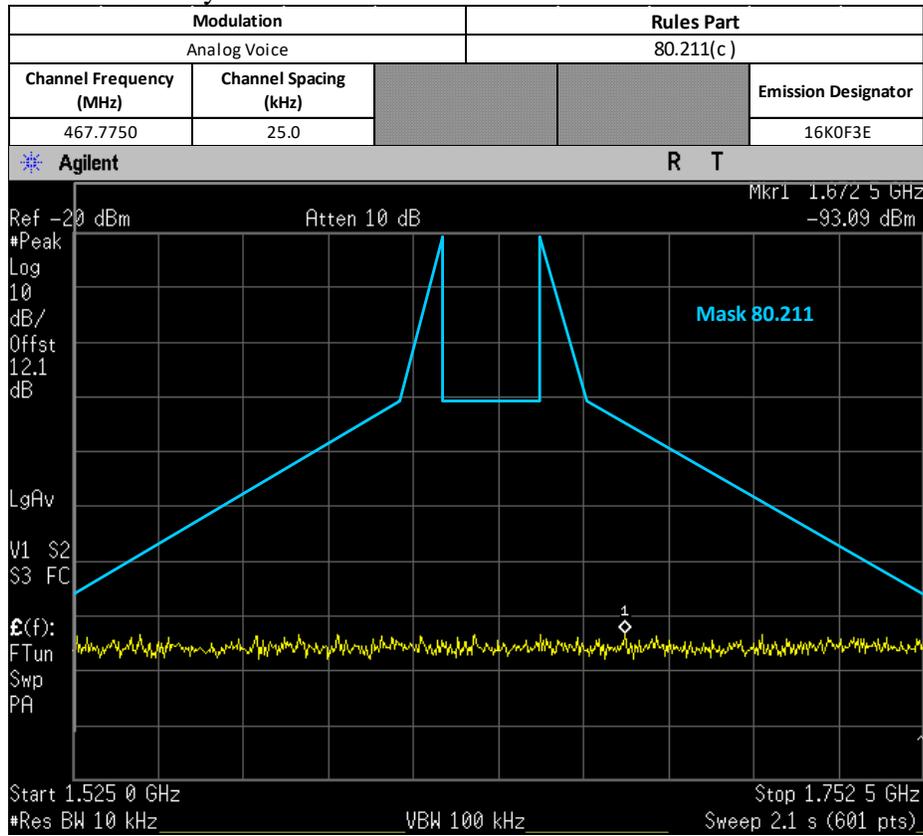

### 6.5.3. Test Setup (Digital)

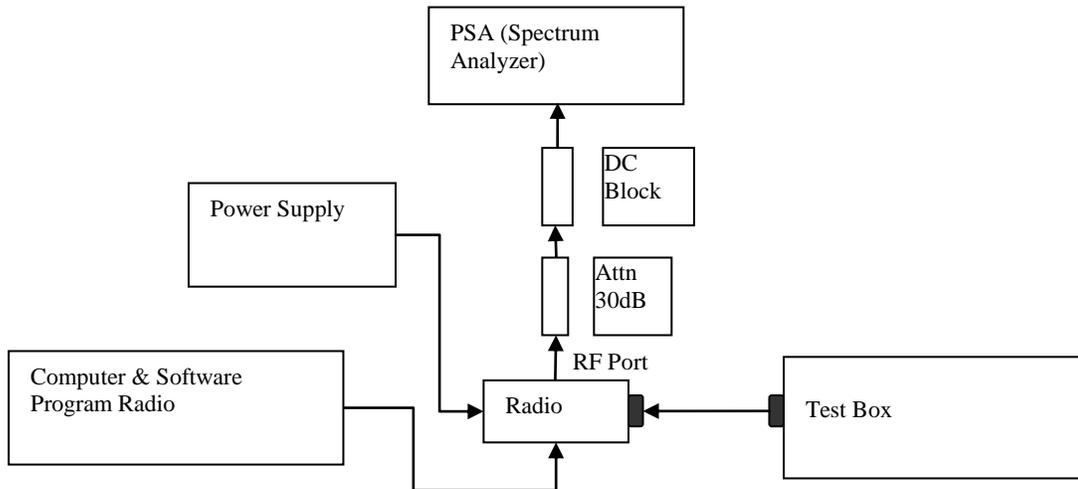

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (\*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

\* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

\*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.


### 6.5.4. Test Result (Digital)



Digital (12.5 kHz Channelization, Digital Voice/Data/Voice+Data):  
 Emission Designator 7K60F1E/D/W



The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson’s rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).



F1E/D/W portion of the designator indicates digital voice/data/voice+data.



Therefore, the entire designator for 12.5 kHz channelization digital voice is 7K60F1E/D/W.


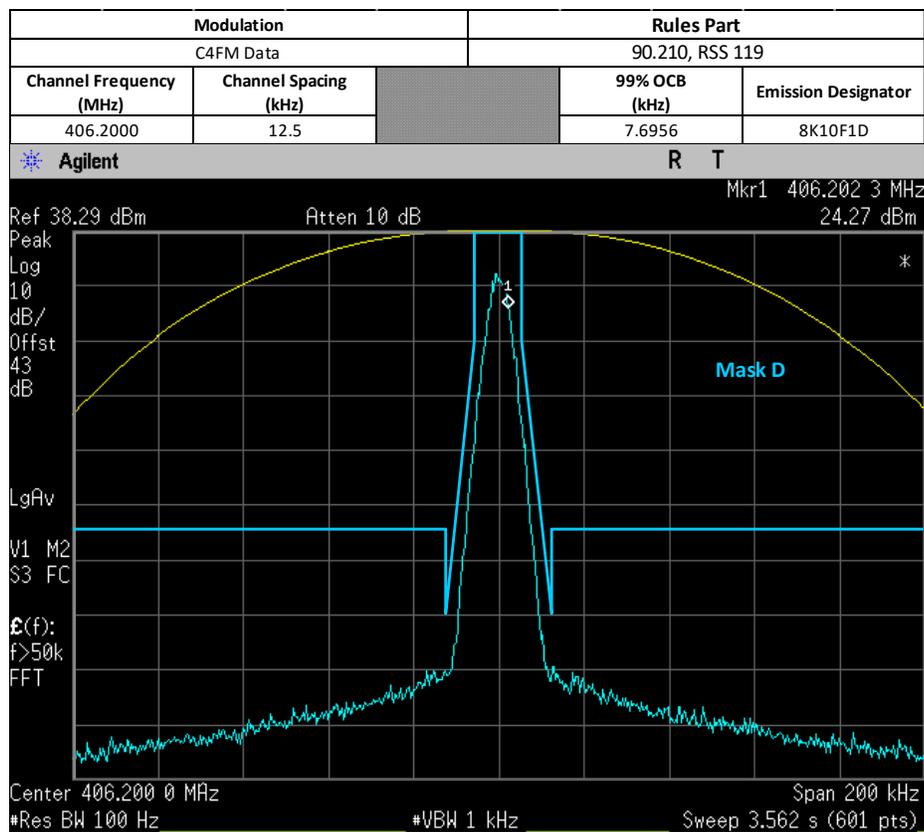


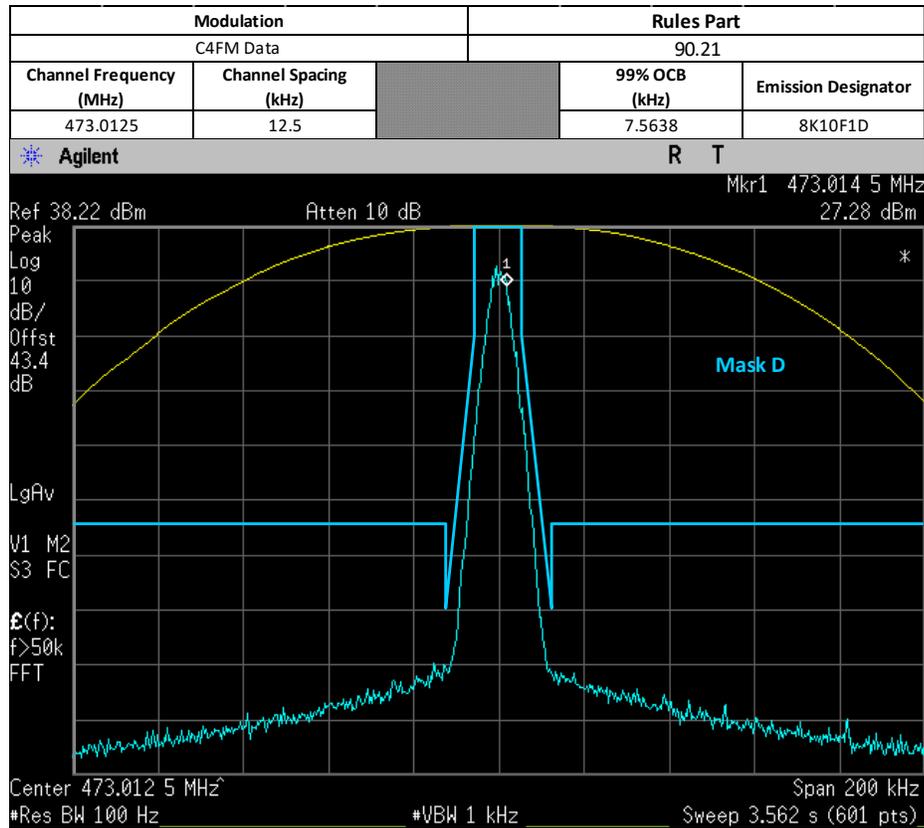
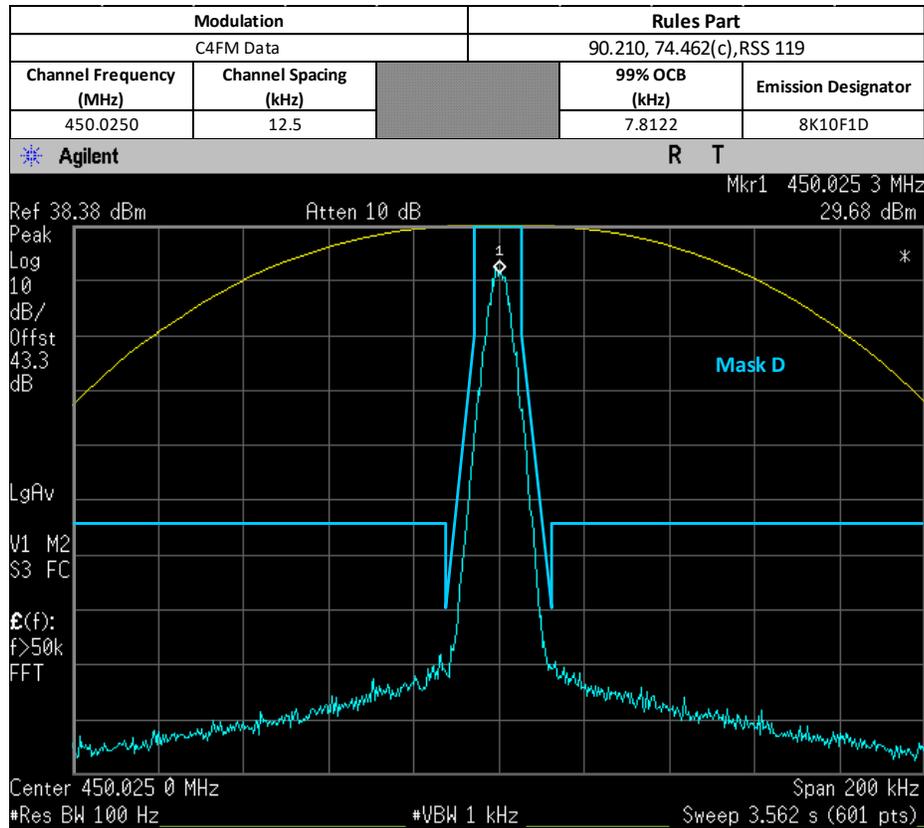


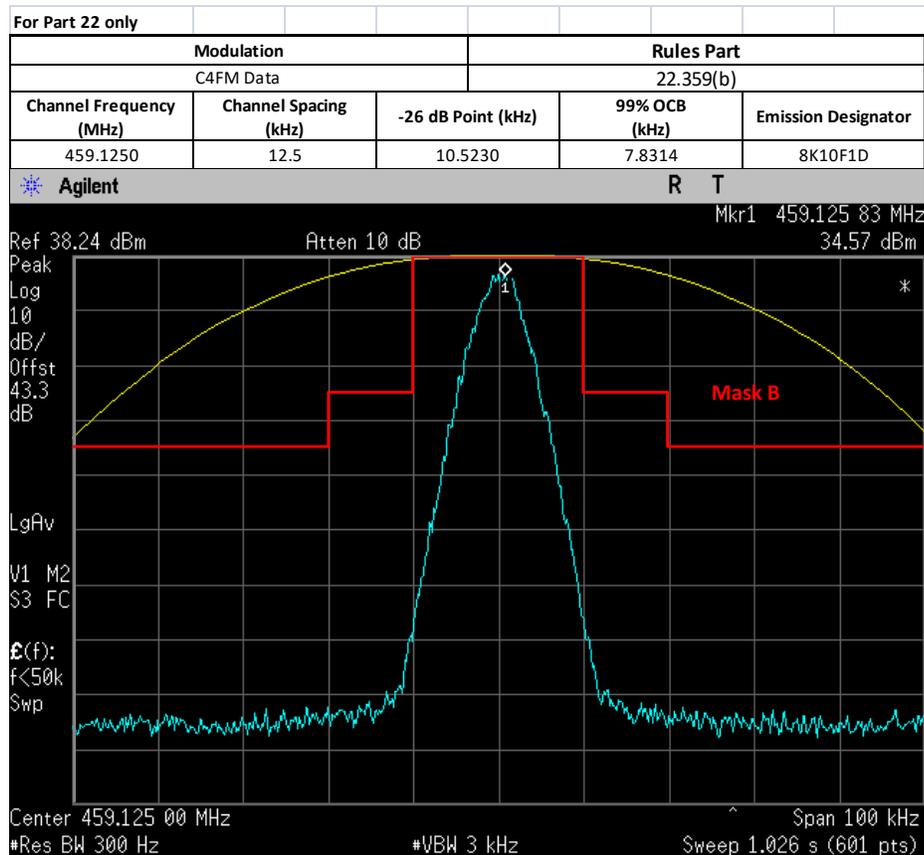
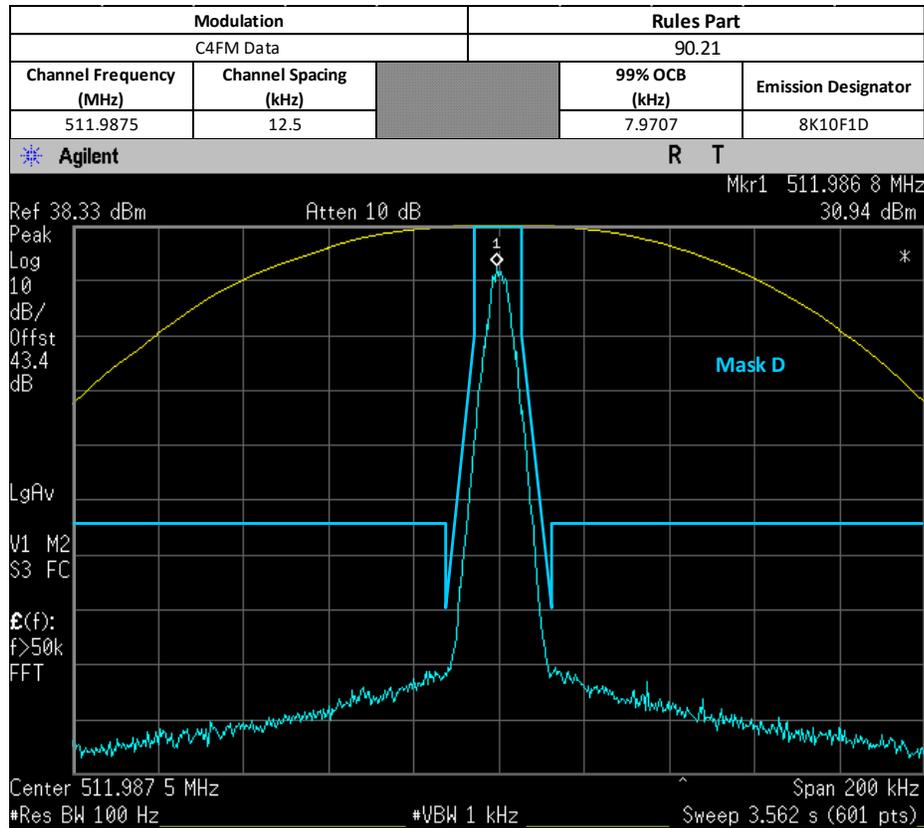


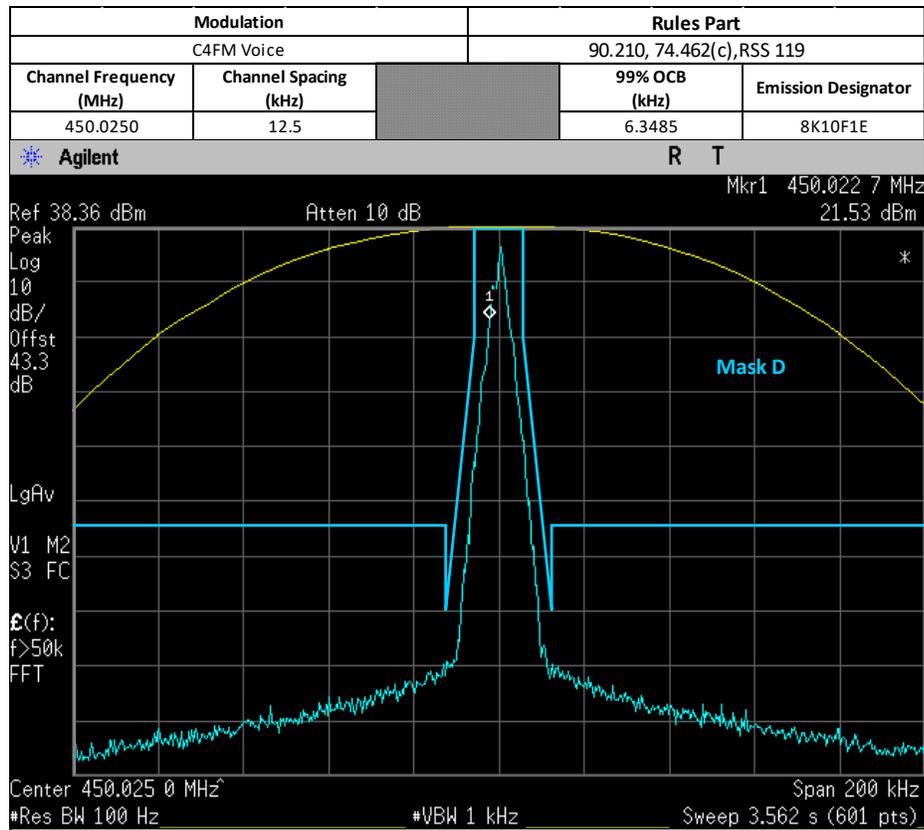
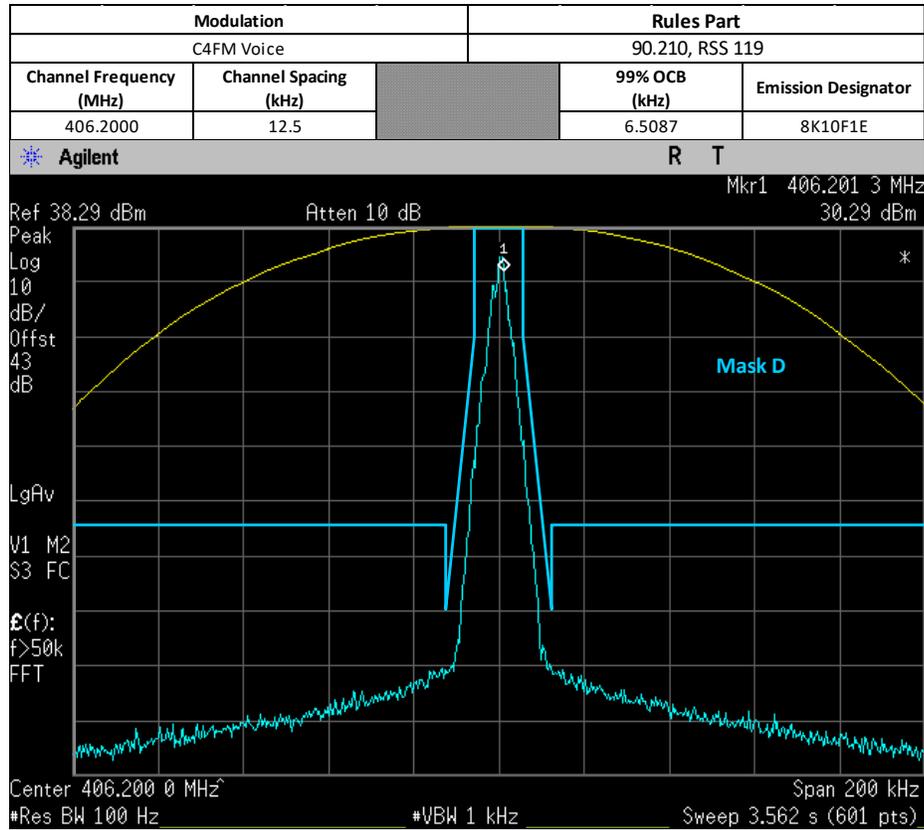


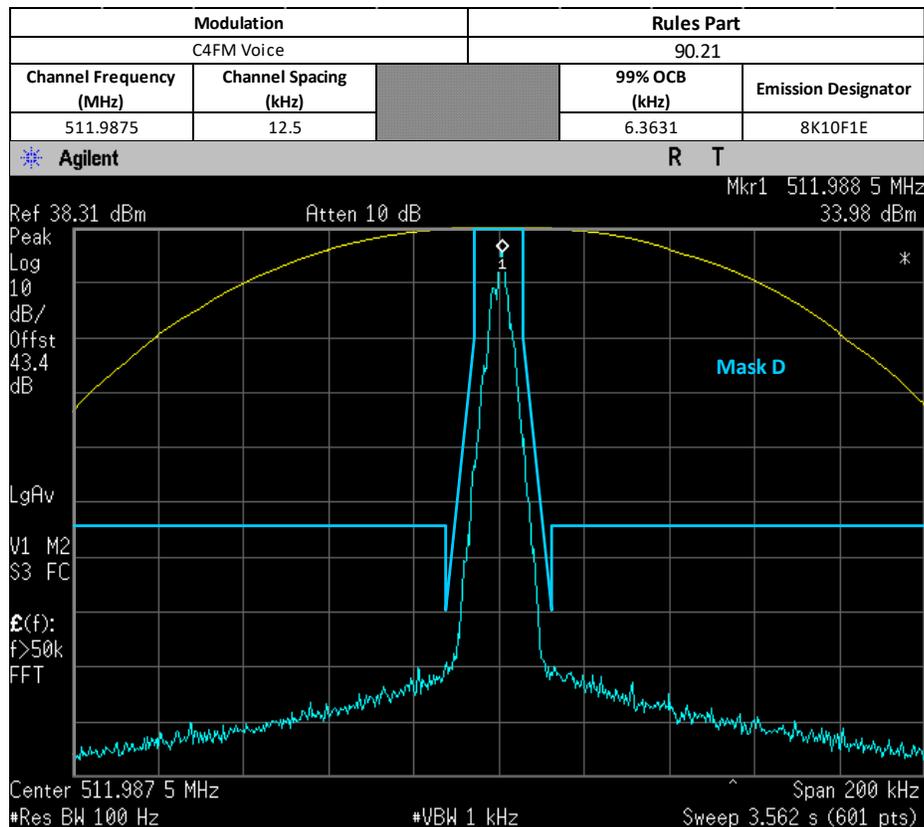
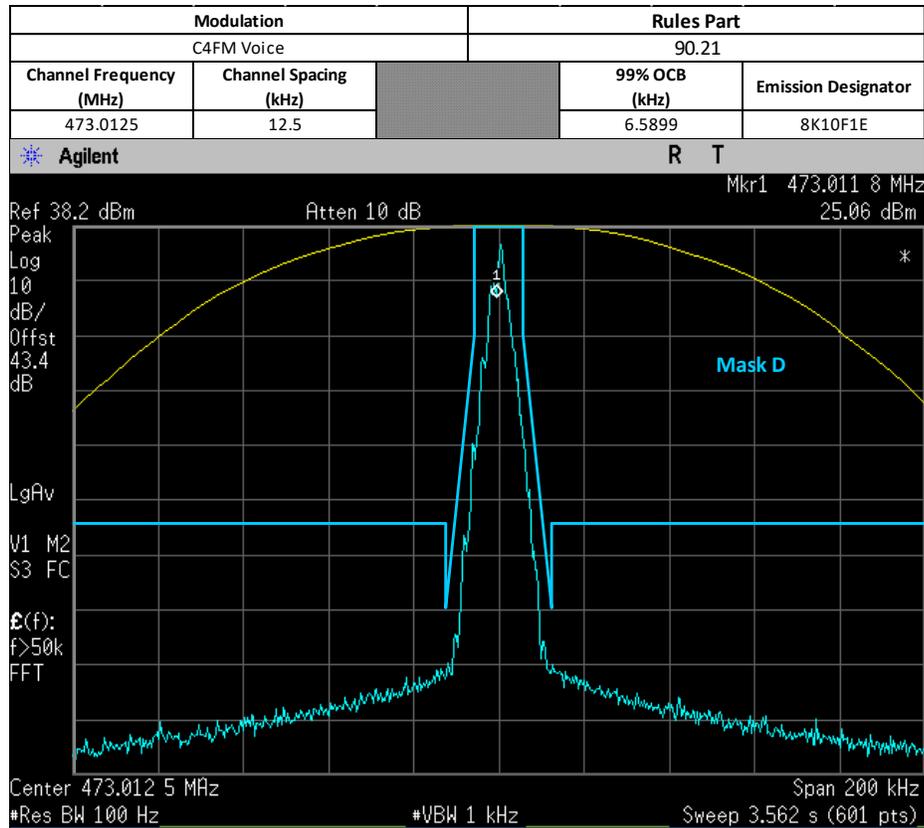


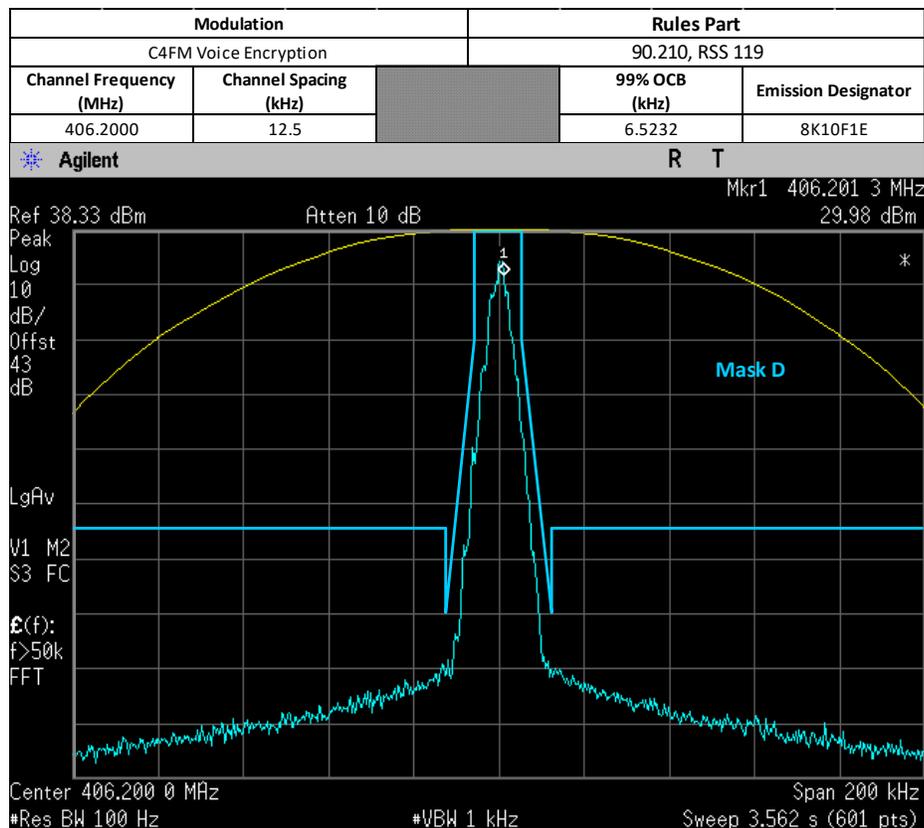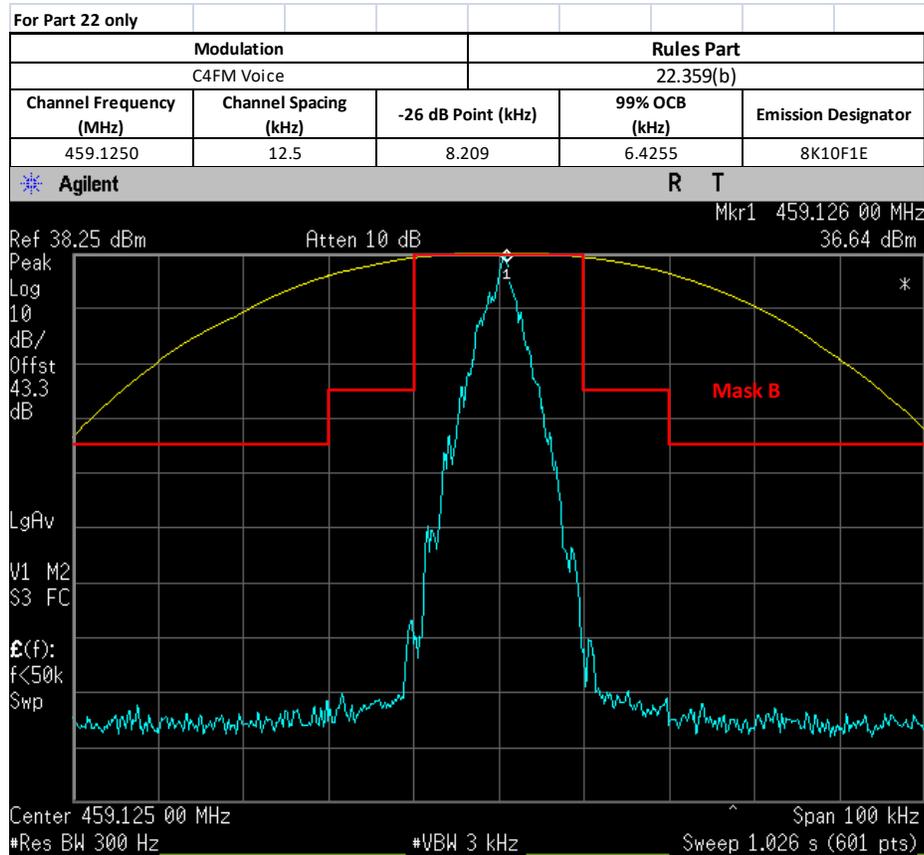


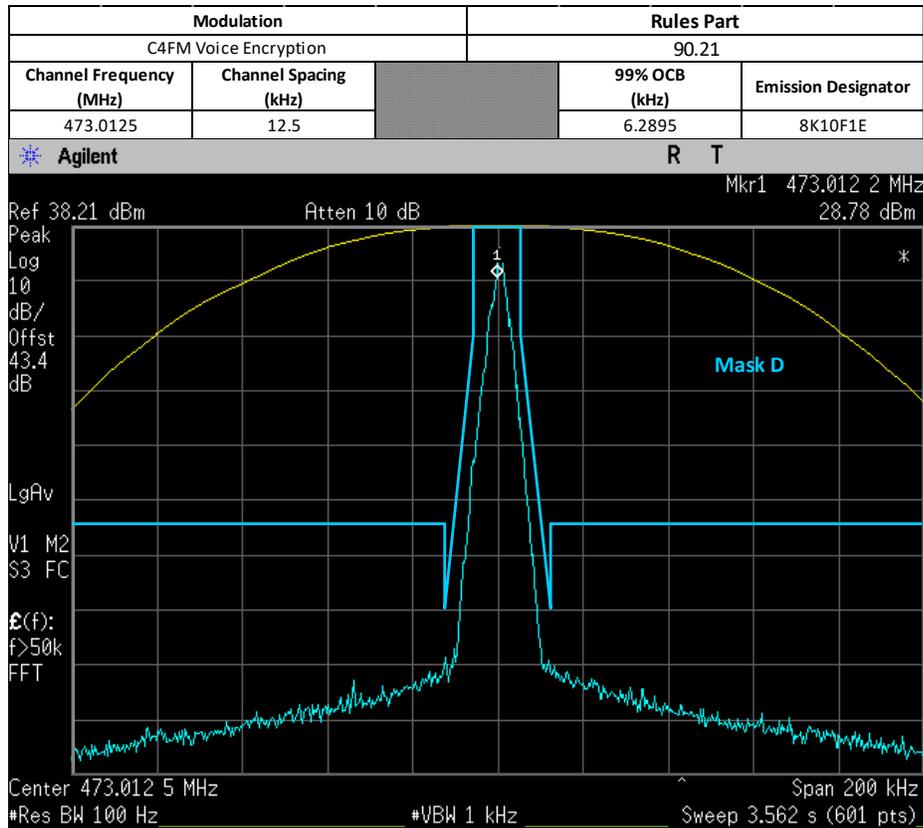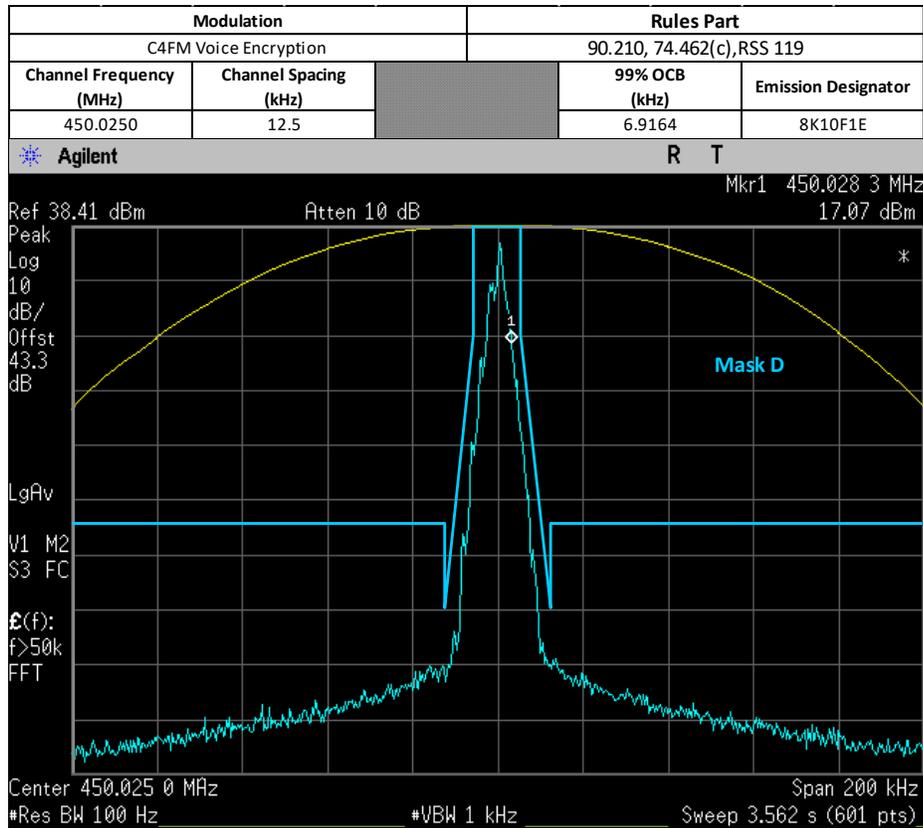

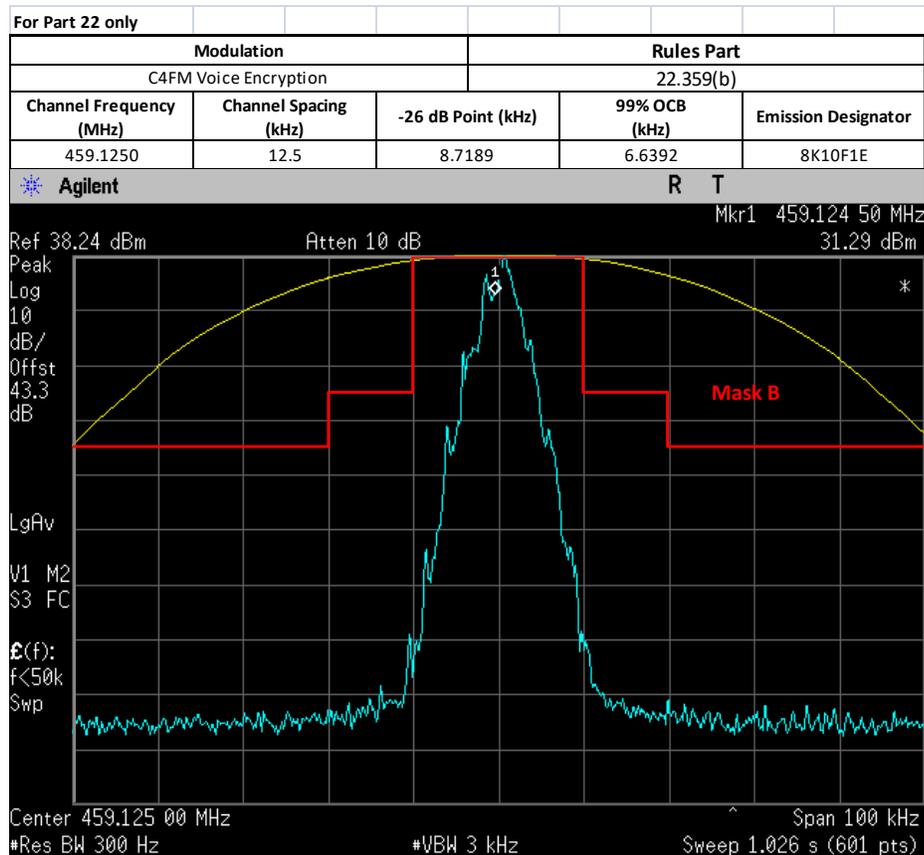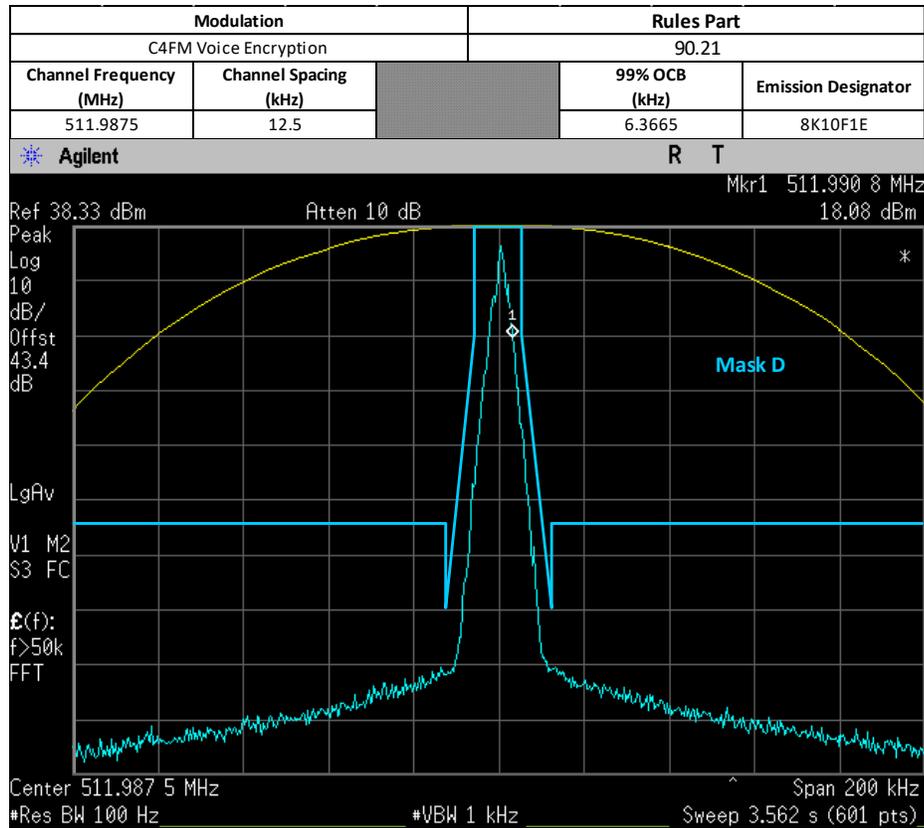

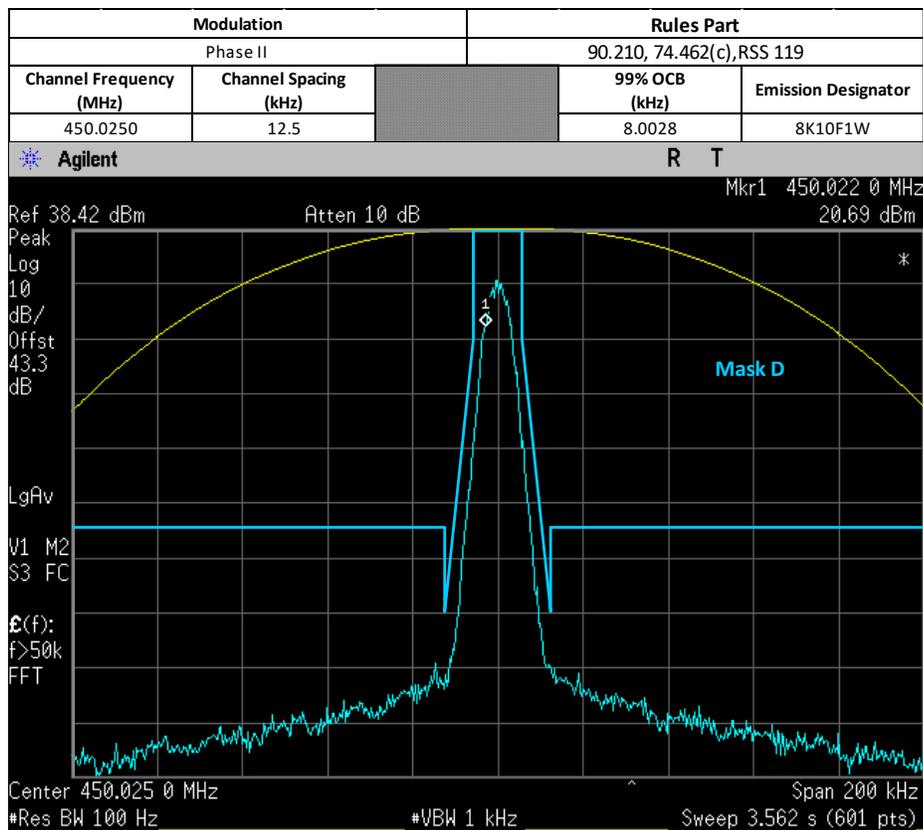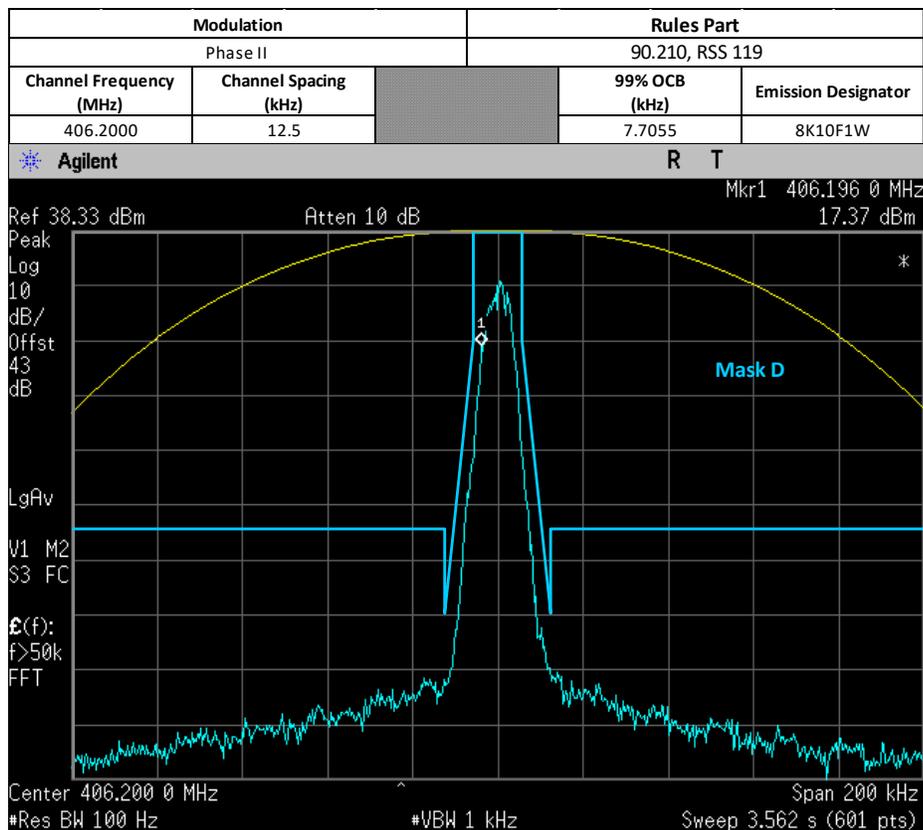

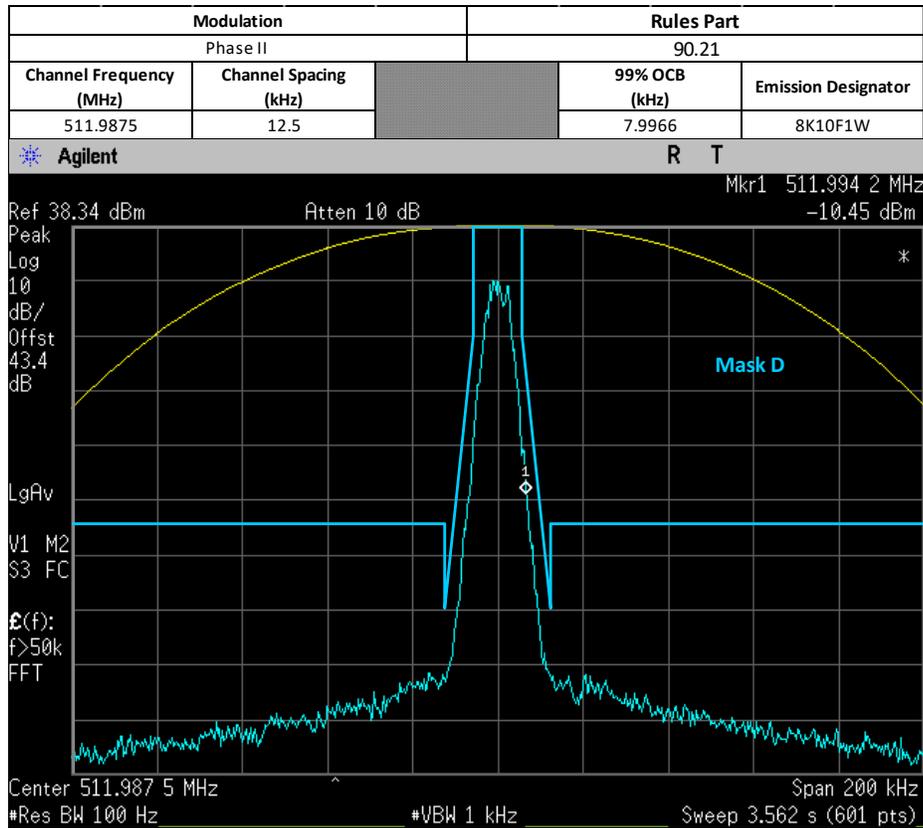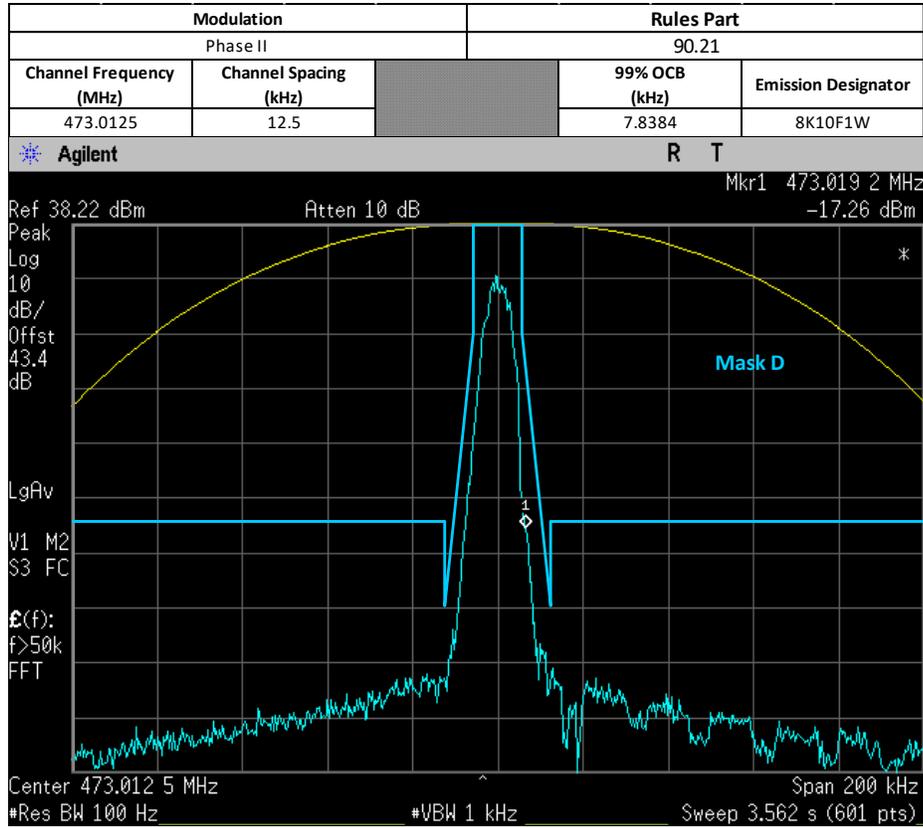

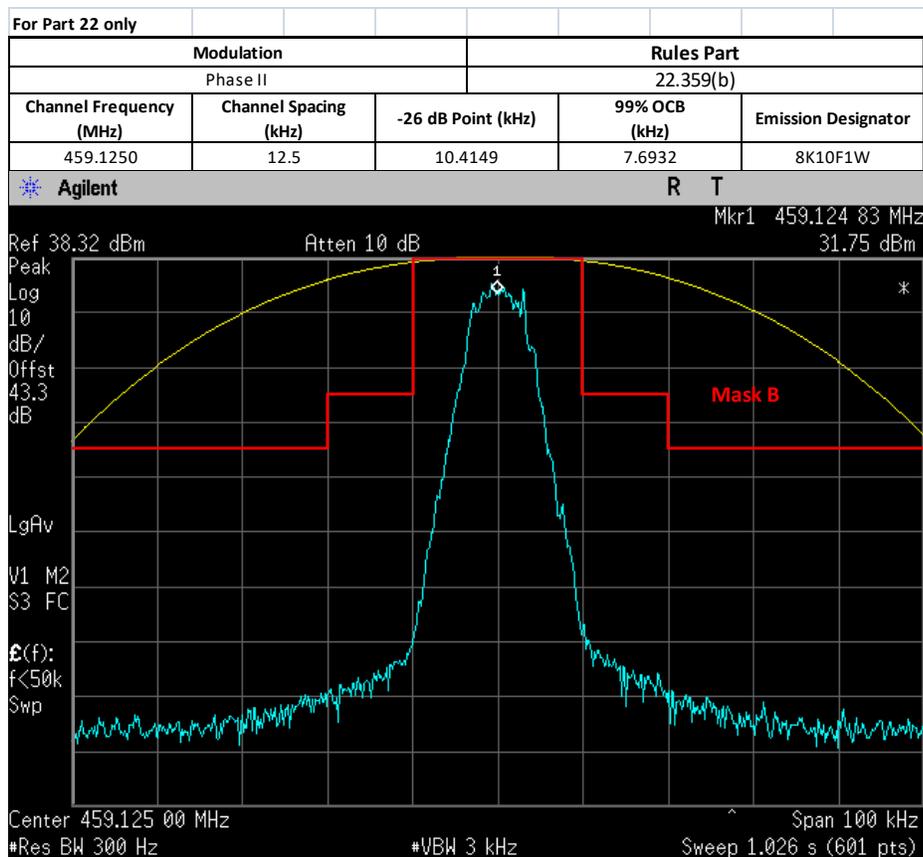


**6.5.5. Test Limit**

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

## 6.6. Band Edge Conducted Spurious Emission (Part 22)

### 6.6.1. Test Setup (Analog)

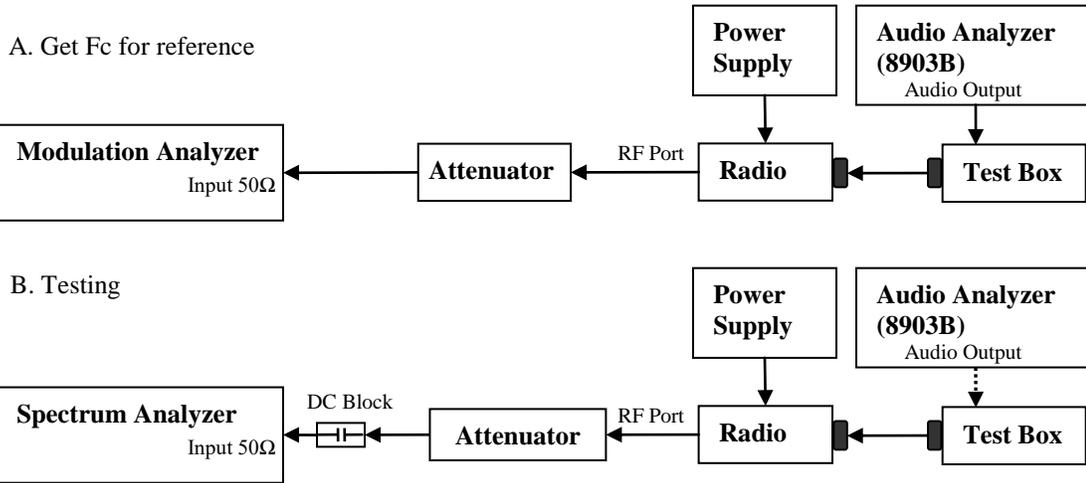


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

\*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

### 6.6.2. Test Result (Analog)


#### For Part 22 only Max Power

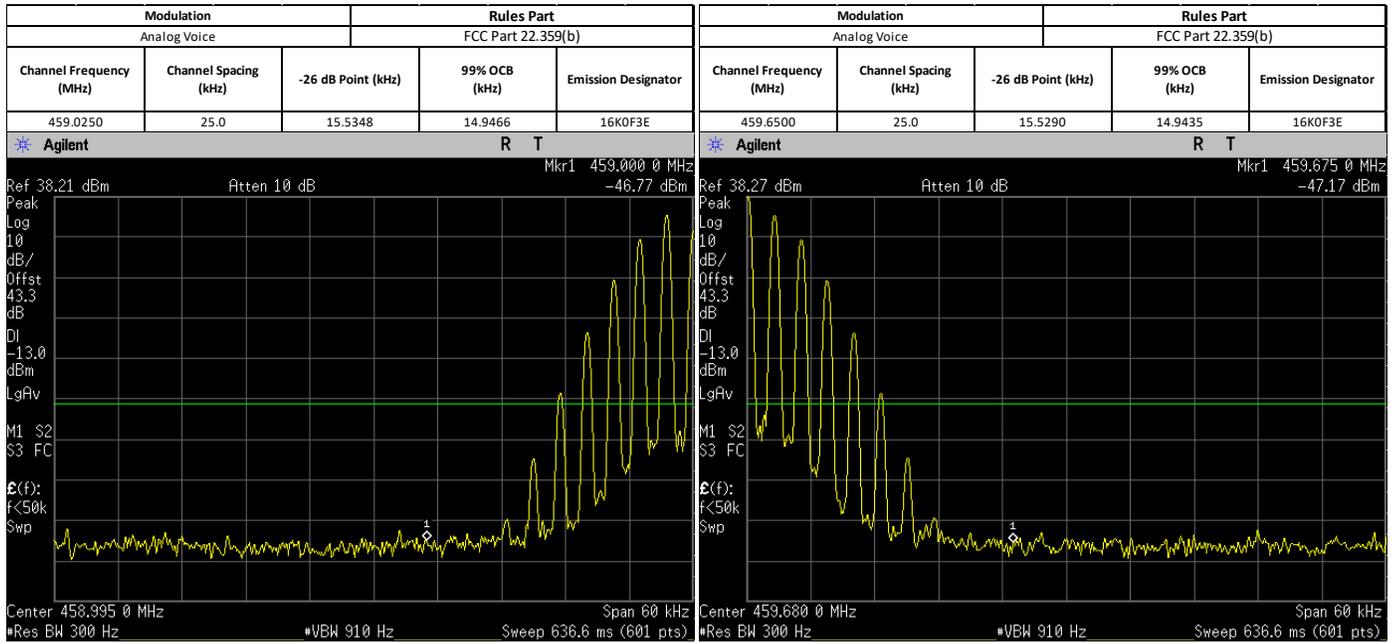

#### For Part 22 only Max Power

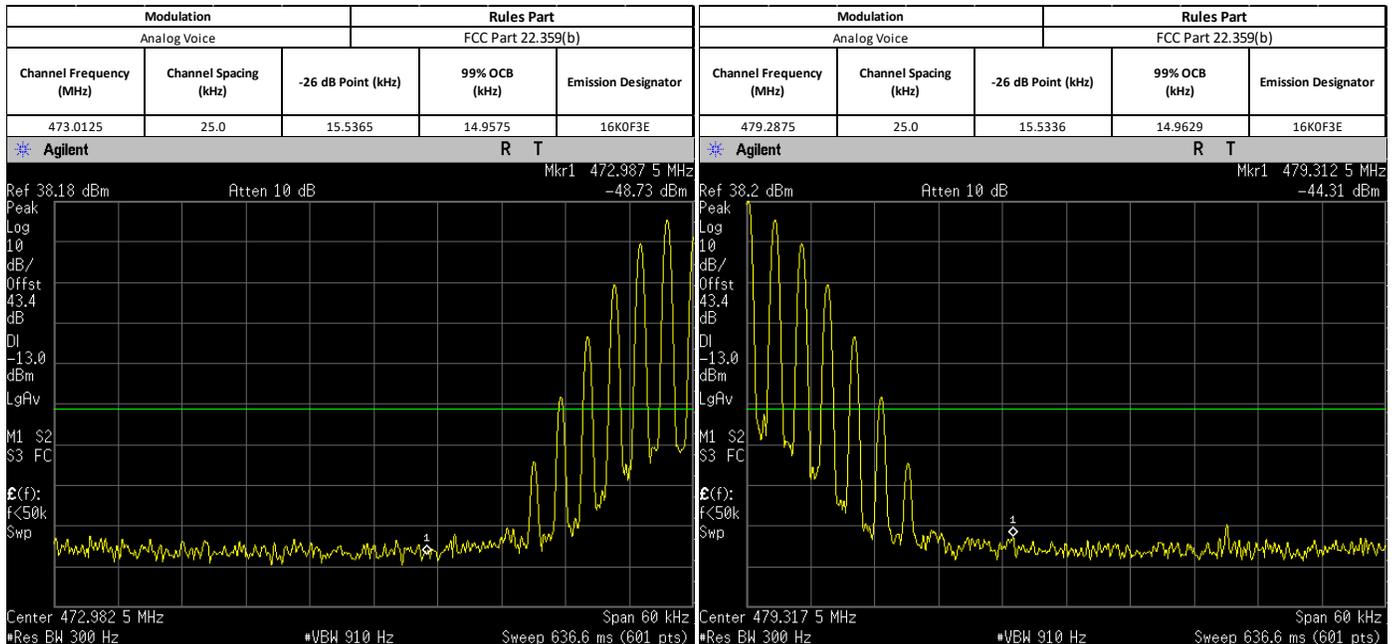

### 6.6.3. Test Setup (Digital)

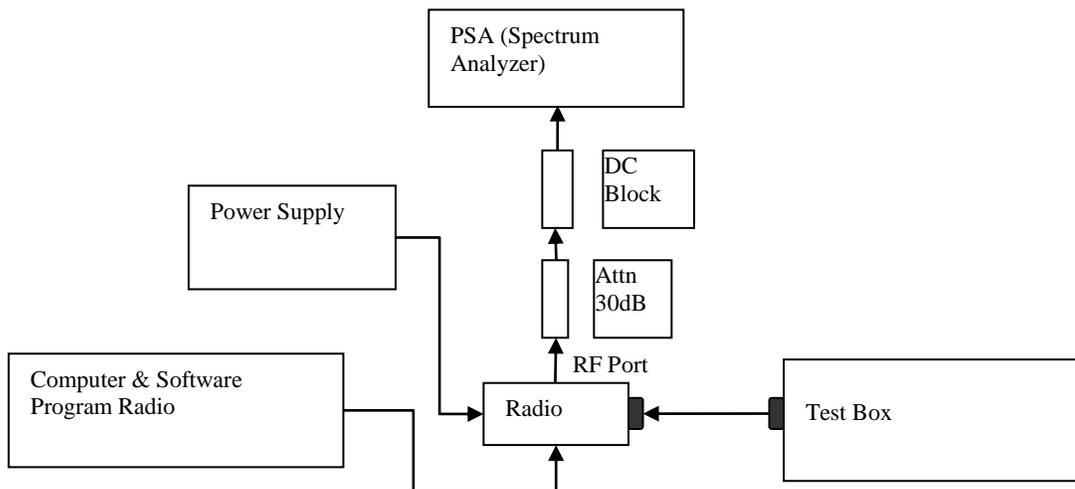


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (\*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

\*Note:


- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

### 6.6.4. Test Result (Digital)


#### For Part 22 only Max Power

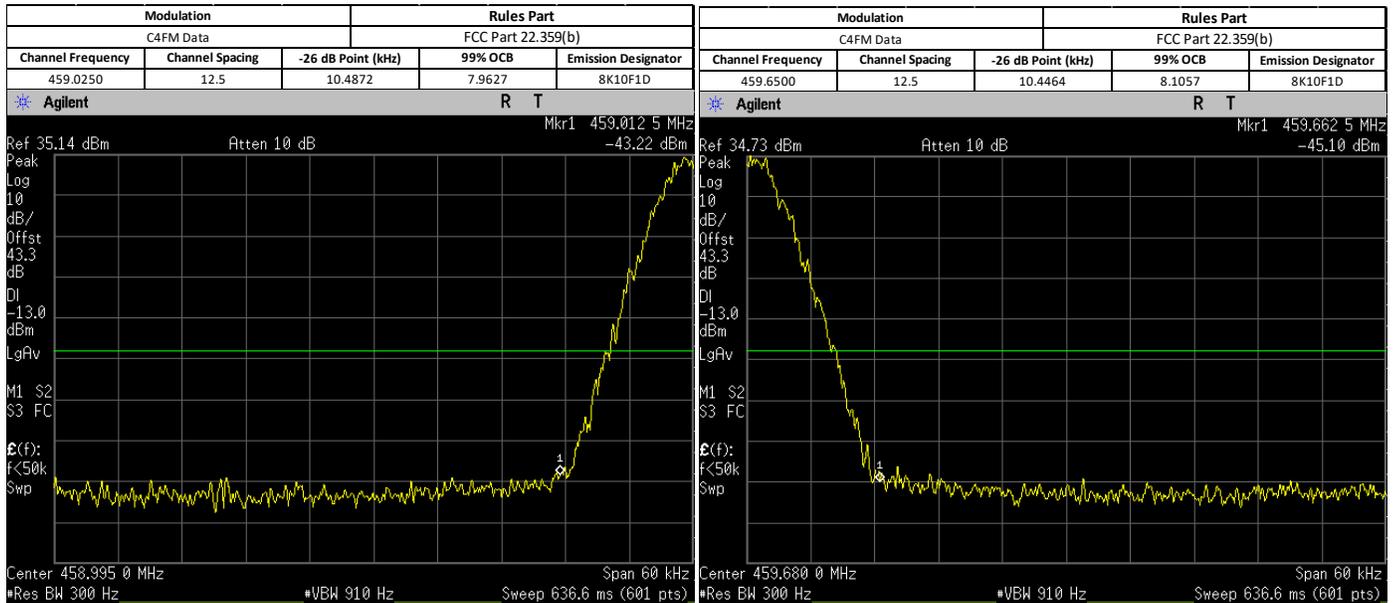


#### For Part 22 only Max Power

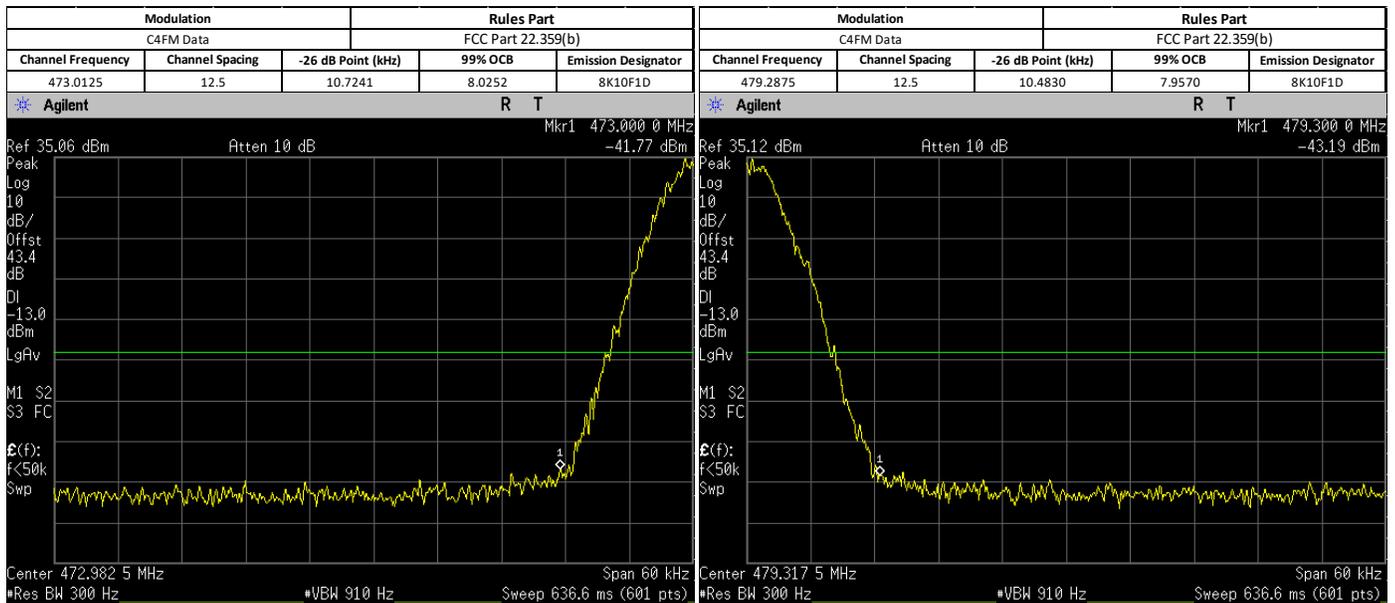

**For Part 22 only**  
**Max Power**

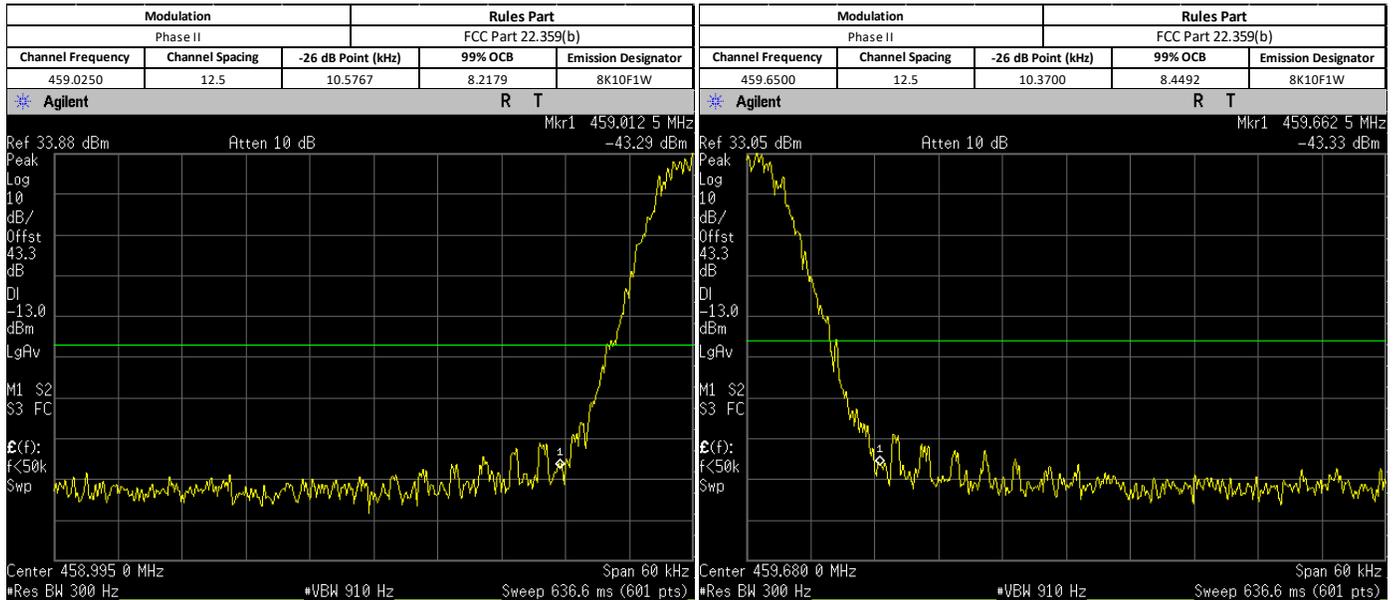

**For Part 22 only**  
**Max Power**

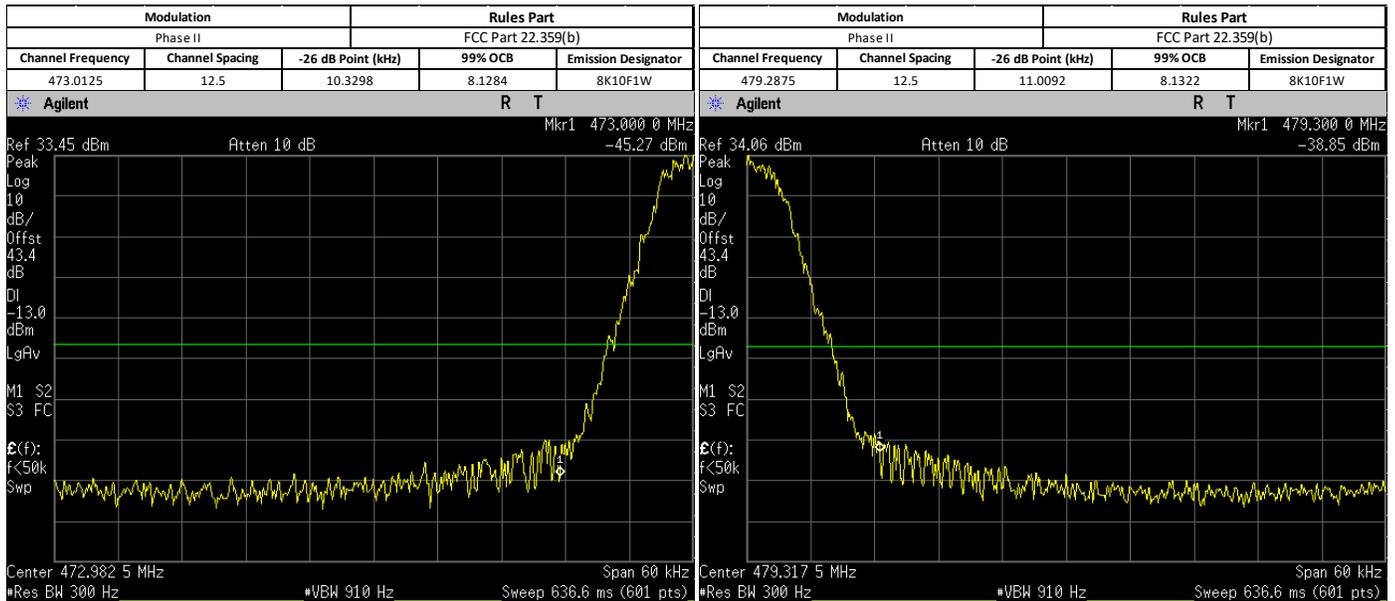


**6.6.5. Test Limit**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

## 6.7. Transient Frequency Behavior



### 6.7.1. Test Setup


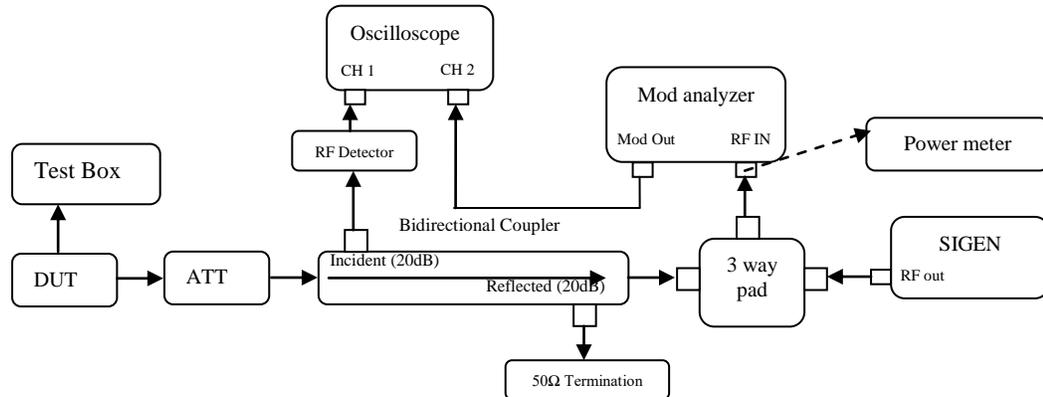


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.  
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz  
Analog 12.5 kHz Channel Spacing = 12.5 kHz  
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of  $\leq -11\text{dBm}$  into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

### 6.7.2. Test Result

Not for FCC review

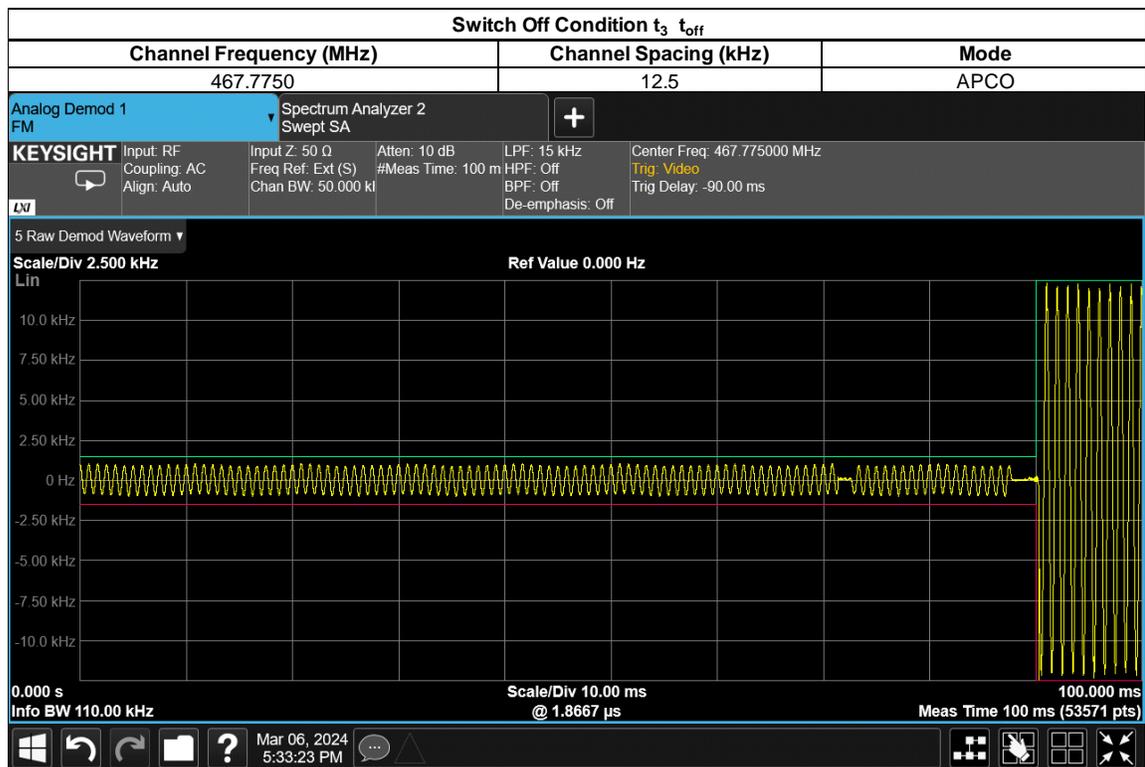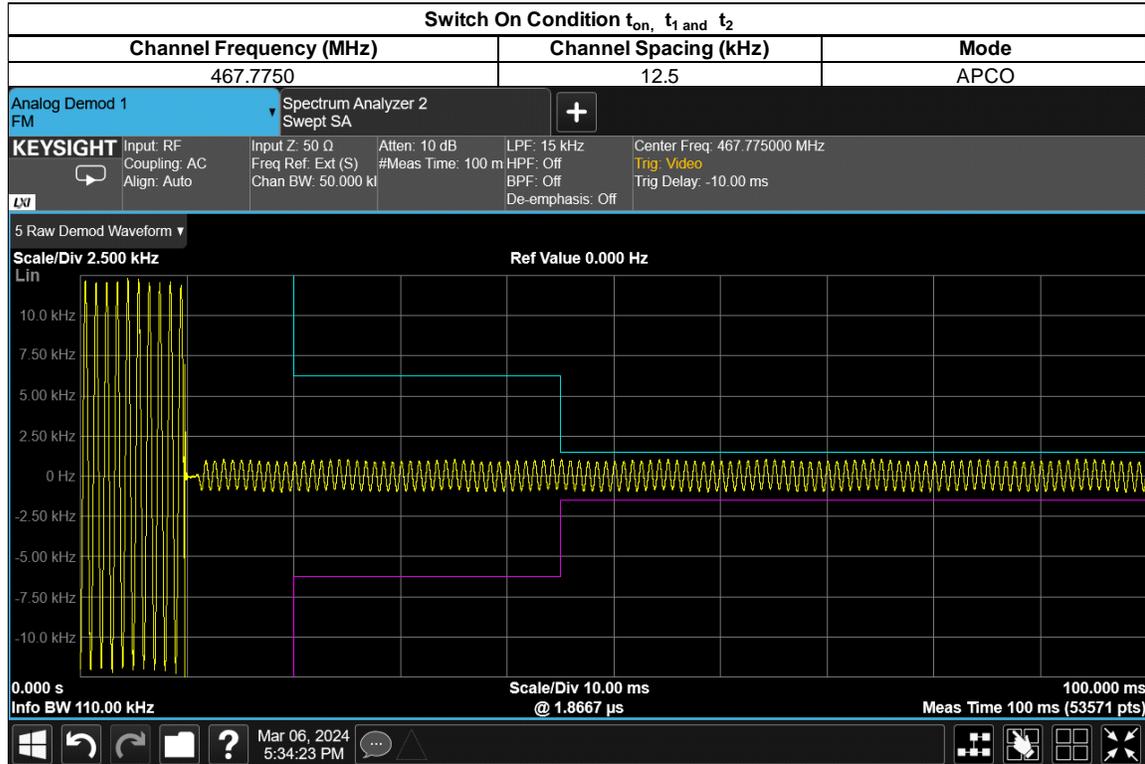

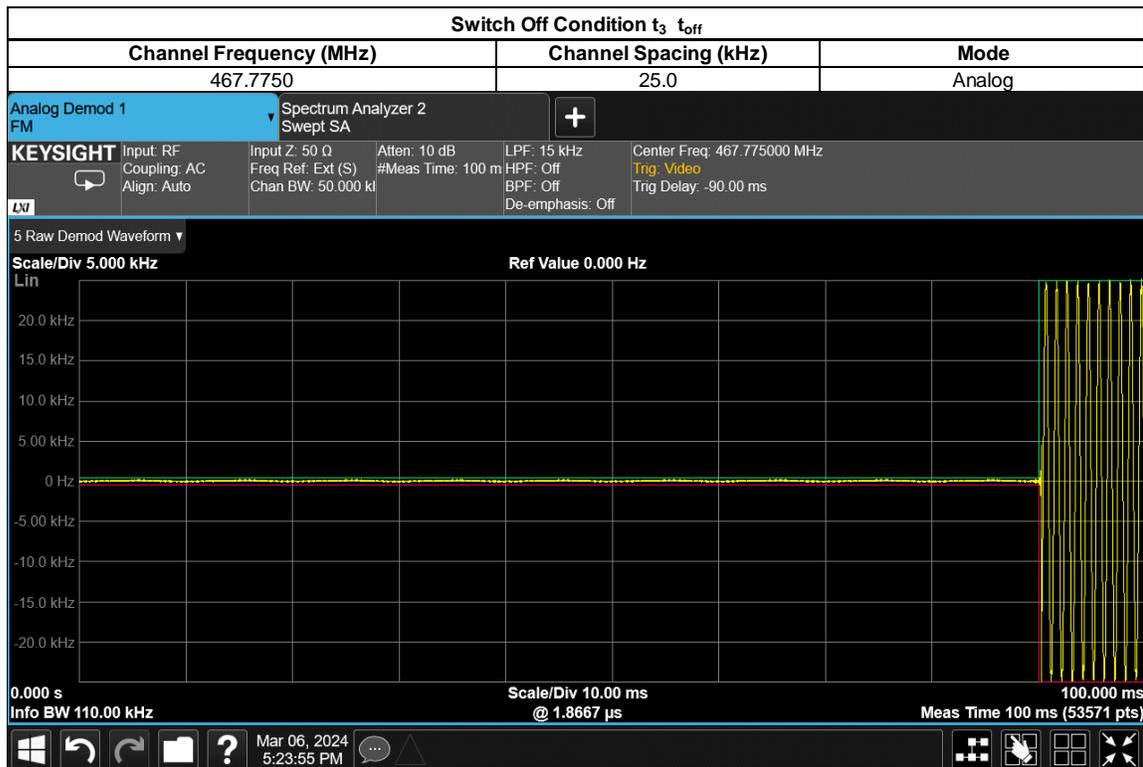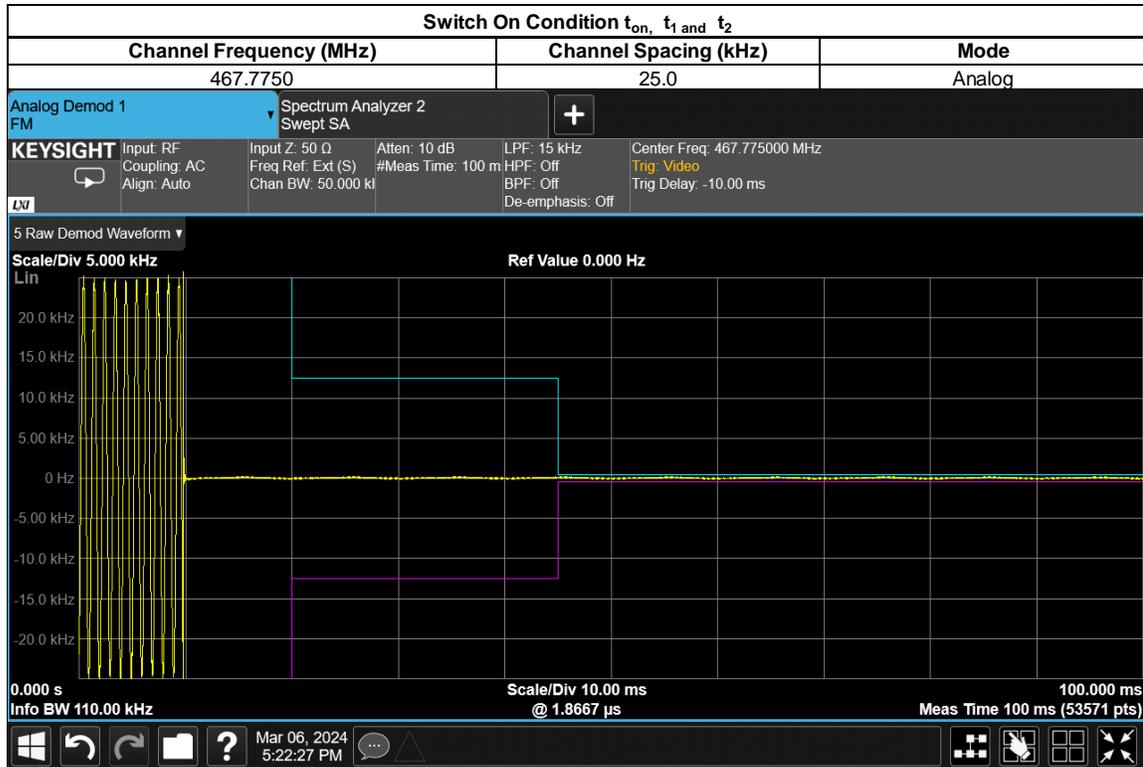

### 6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals <sup>1 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup> <sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.


<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

## 6.8. Adjacent Channel Power


### 6.8.1. Test Setup (Analog)

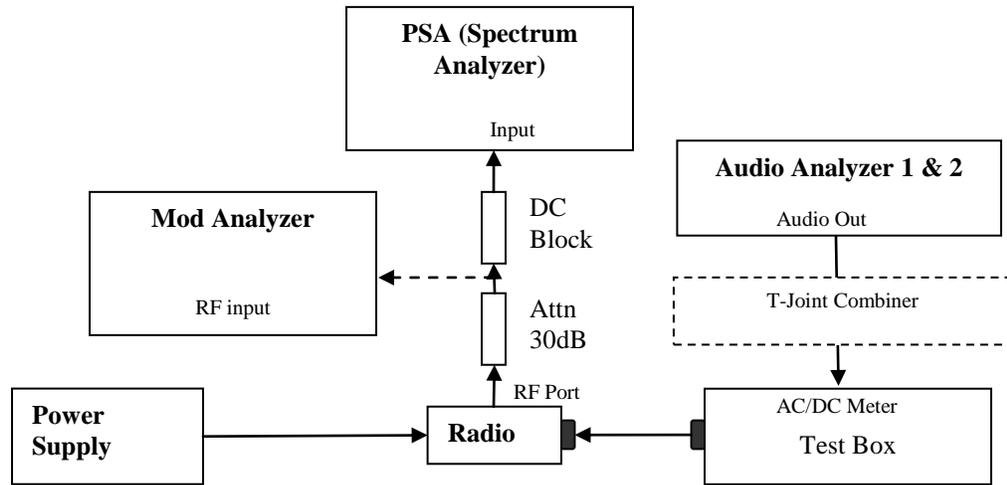

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1<sup>st</sup> audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

### 6.8.2. Test Result **Not Applicable**

### 6.8.3. Test Setup (Digital)

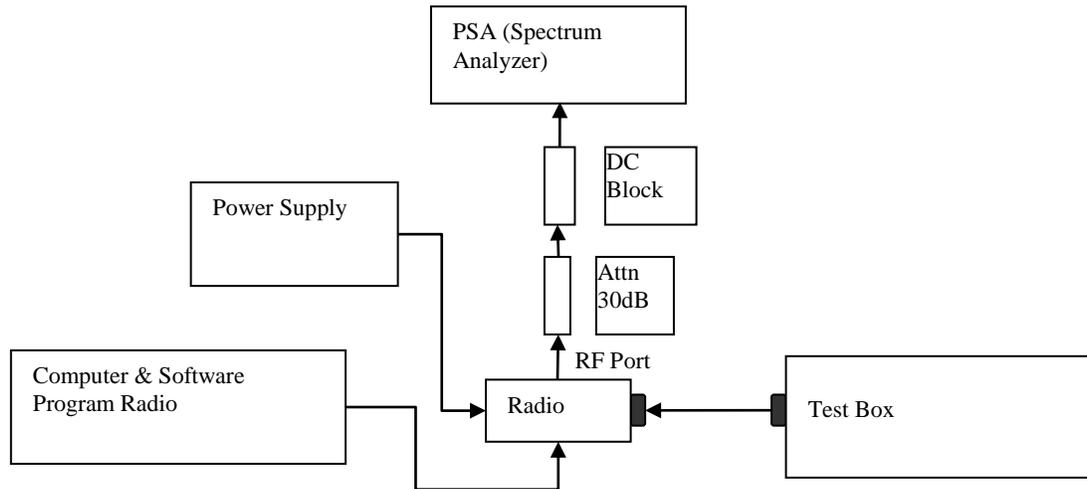

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

### 6.8.4. Test Result **Not Applicable**

### 6.8.5. Test Limit

#### 12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

#### 25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

**12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS**


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	<sup>1</sup> -85

**25 kHz BASE TRANSMITTER ACP REQUIREMENTS**

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	<sup>1</sup> -85

## 6.9. Conducted Spurious Emission


### 6.9.1. Test Setup

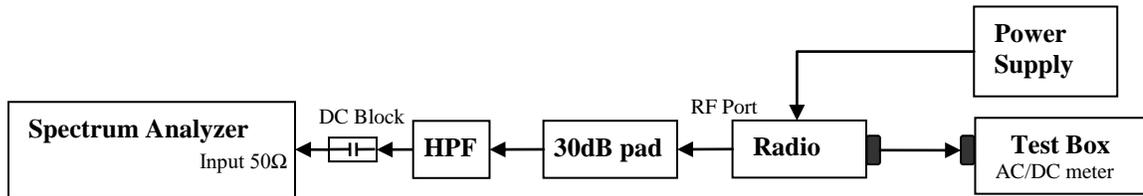

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
  - a. 9 KHz to  $F_c - \text{Test Bandwidth}$
  - b.  $F_c + \text{Test Bandwidth}$  to  $2F_c - 5\text{MHz}$ .
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from  $2F_c$  to  $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


### 6.9.2. Test Result (Analog)

#### Analog: 380.0125 MHz, 25 kHz Channel Spacing, Max Power Not for FCC review

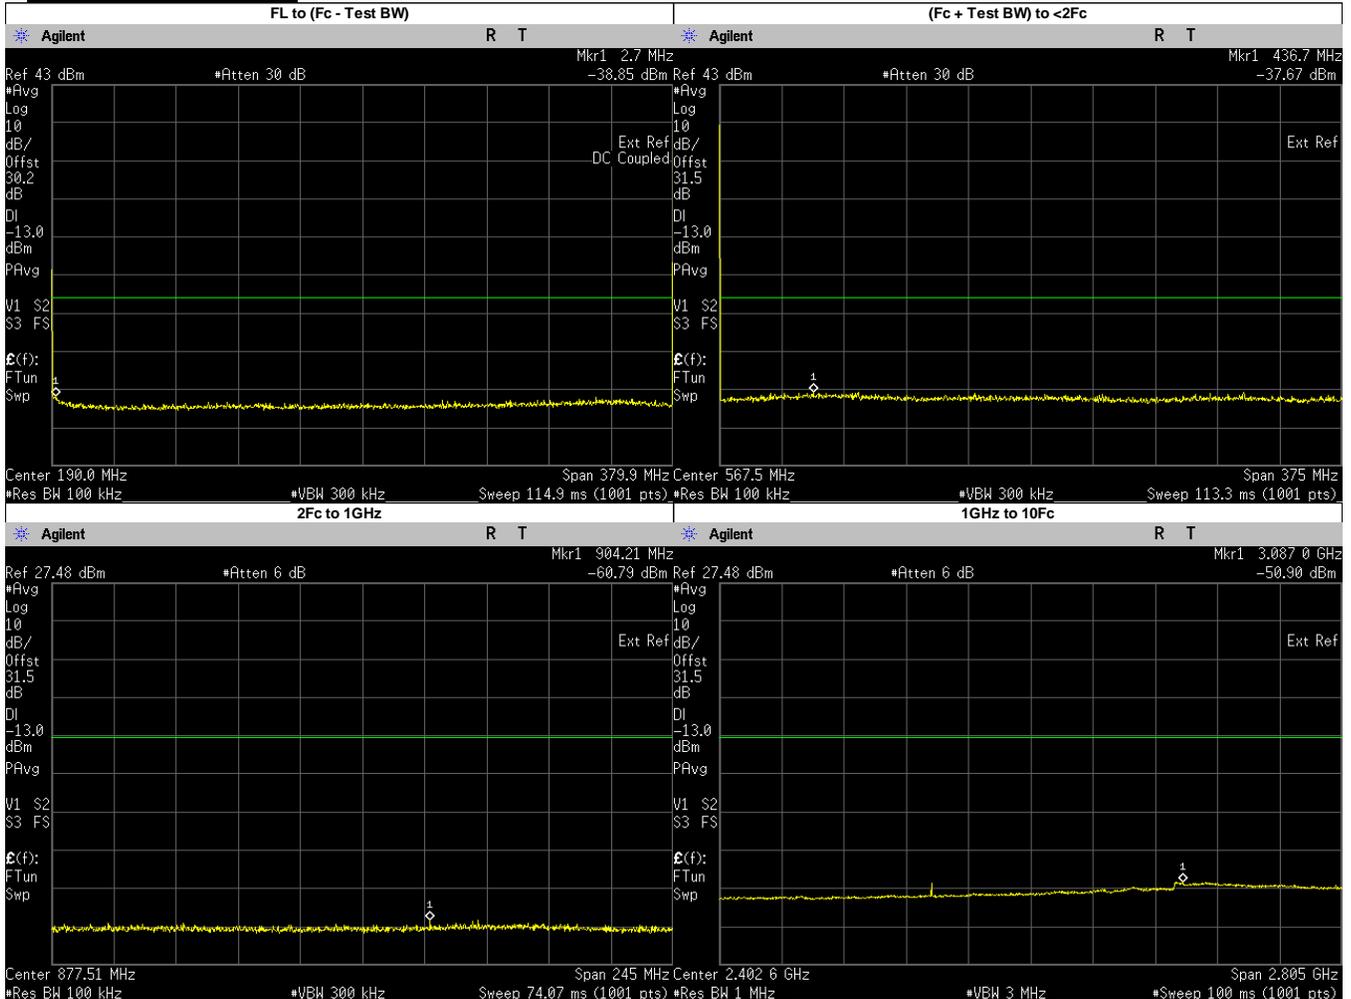


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.7000	-38.8520	-13	PASS
(Fc + Test BW) to <2Fc	436.6866	-37.6700	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	904.2148	-60.7900	-13	PASS
	760.0250	-62.1095	-13	PASS
	3087.0130	-50.9000	-13	PASS
	1140.0370	-54.8474	-13	PASS
	1520.0500	-54.7333	-13	PASS
	1900.0620	-54.4474	-13	PASS
	2280.0750	-54.1759	-13	PASS
	2660.0880	-53.4206	-13	PASS
	3040.1000	-52.8033	-13	PASS
	3420.1130	-51.9940	-13	PASS
3800.1250	-52.3701	-13	PASS	

**Analog: 406.2000 MHz, 25 kHz Channel Spacing, Max Power**  
**Not for FCC review**

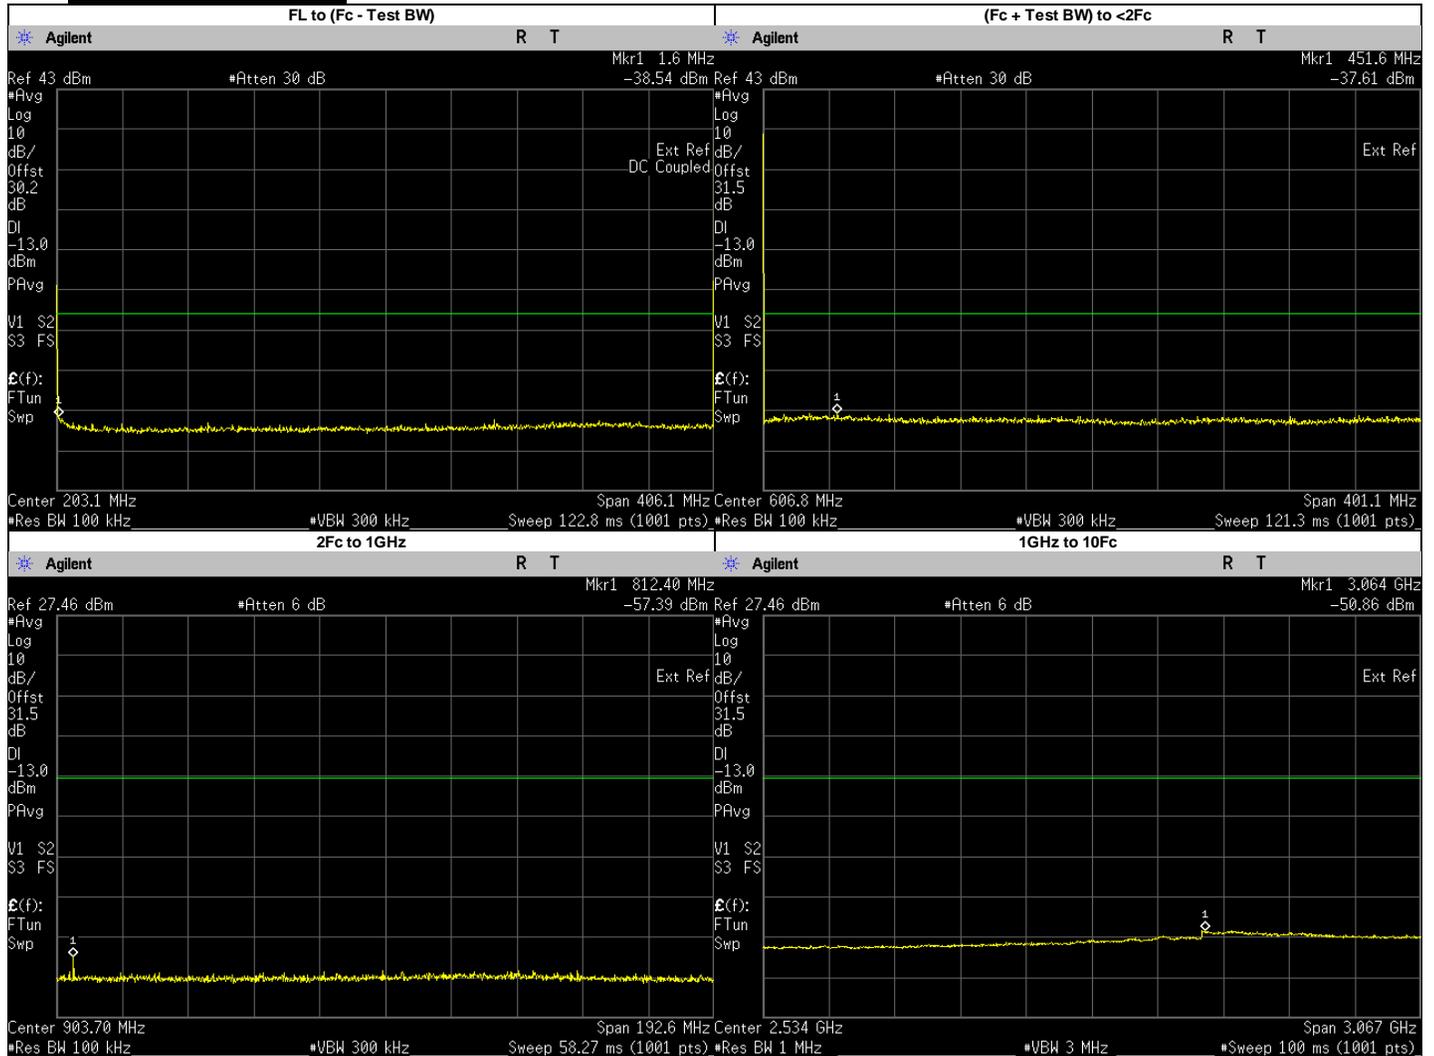


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6000	-38.5440	-13	PASS
(Fc + Test BW) to <2Fc	451.5849	-37.6100	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	812.4000	-57.3900	-13	PASS
	3064.0910	-50.8600	-13	PASS
	1218.6000	-55.0673	-13	PASS
	1624.8000	-54.9551	-13	PASS
	2031.0000	-54.3700	-13	PASS
	2437.2000	-53.9671	-13	PASS
	2843.4000	-52.7823	-13	PASS
	3249.6000	-51.4514	-13	PASS
	3655.8000	-52.0079	-13	PASS
4062.0000	-52.6027	-13	PASS	

**Analog: 450.0250 MHz, 25 kHz Channel Spacing, Low Power  
 For Part 74**

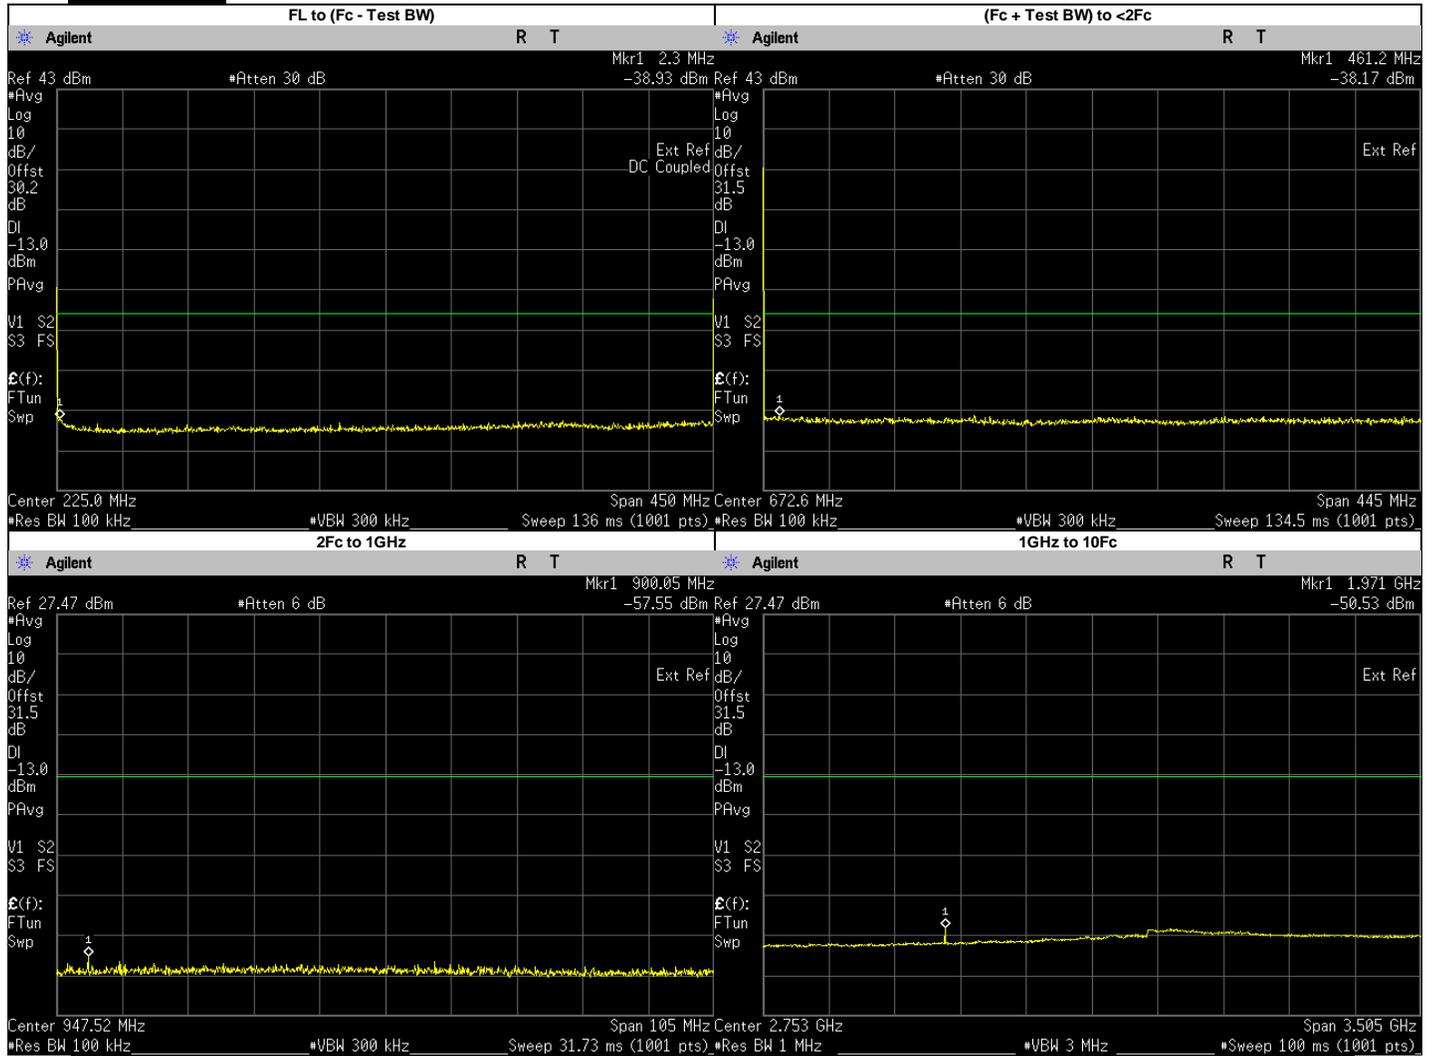


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.3000	-38.9280	-13	PASS
(Fc + Test BW) to <2Fc	461.2060	-38.1700	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	900.0500	-57.5500	-13	PASS
	1970.9540	-50.5300	-13	PASS
	1350.0750	-54.6165	-13	PASS
	1800.1000	-54.5189	-13	PASS
	2250.1250	-54.2517	-13	PASS
	2700.1500	-53.1846	-13	PASS
	3150.1750	-51.3537	-13	PASS
	3600.2000	-52.1484	-13	PASS
	4050.2250	-52.4219	-13	PASS
4500.2500	-52.7137	-13	PASS	

**Analog: 450.0250 MHz, 25 kHz Channel Spacing, Max Power  
 For Part 74**

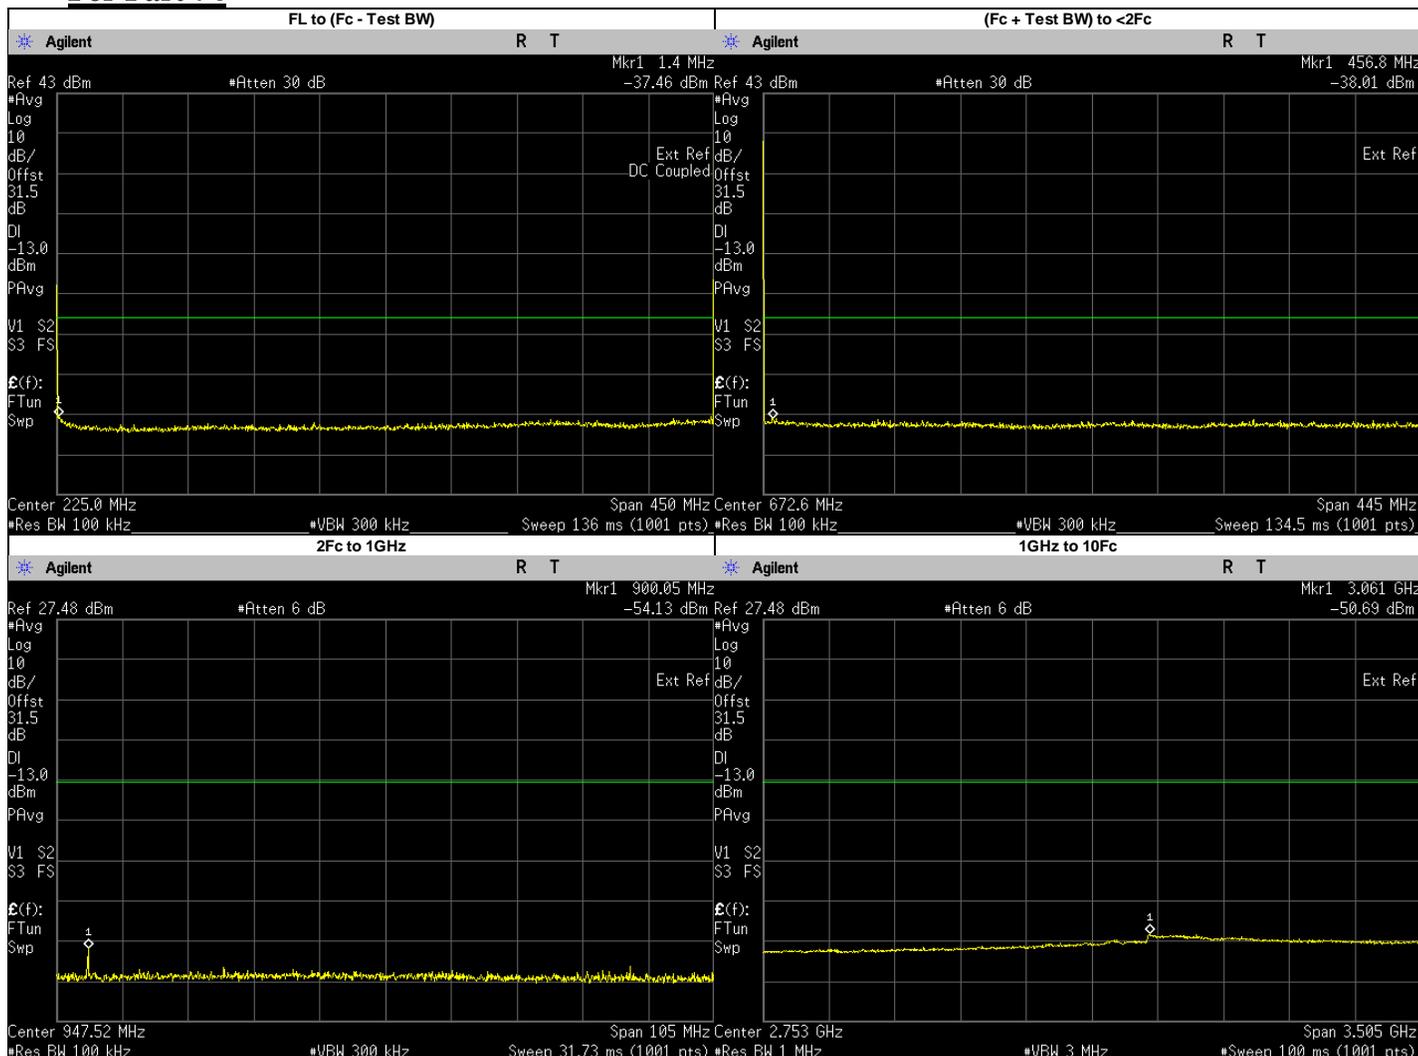


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4000	-37.4620	-13	PASS
(Fc + Test BW) to <2Fc	456.7563	-38.0100	-13	PASS
2Fc to 1GHz	900.0500	-55.1300	-13	PASS
1GHz to 10Fc	3061.0870	-50.6900	-13	PASS
	1350.0750	-54.4909	-13	PASS
	1800.1000	-54.6519	-13	PASS
	2250.1250	-54.2034	-13	PASS
	2700.1500	-53.2714	-13	PASS
	3150.1750	-51.2889	-13	PASS
	3600.2000	-52.0315	-13	PASS
	4050.2250	-52.5482	-13	PASS
4500.2500	-52.7163	-13	PASS	

**Analog: 459.1250 MHz, 25 kHz Channel Spacing, Max Power  
 For Part 22**

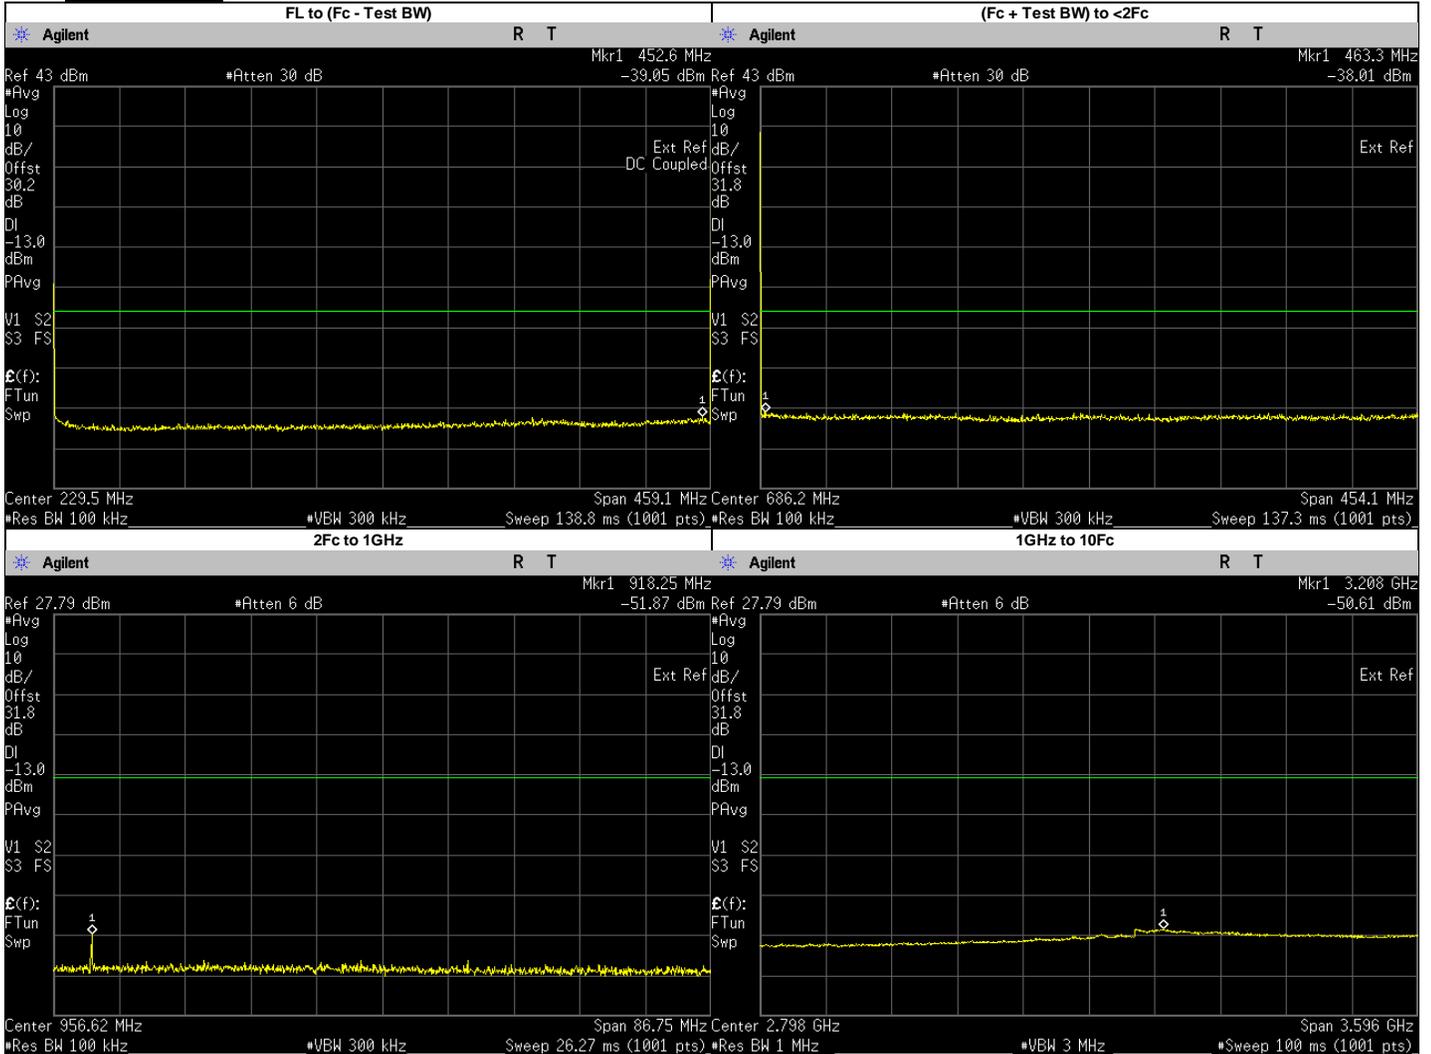


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	452.6000	-39.0460	-13	PASS
(Fc + Test BW) to <2Fc	463.2684	-38.0100	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	918.2500	-51.8700	-13	PASS
	3208.0970	-50.6100	-13	PASS
	1377.3750	-54.1522	-13	PASS
	1836.5000	-54.4416	-13	PASS
	2295.6250	-53.8196	-13	PASS
	2754.7500	-52.9848	-13	PASS
	3213.8750	-50.9555	-13	PASS
	3673.0000	-52.1027	-13	PASS
	4132.1250	-52.1486	-13	PASS
4591.2500	-52.2578	-13	PASS	

**Analog: 467.7750 MHz, 25 kHz Channel Spacing, Low Power  
 For Part 80**

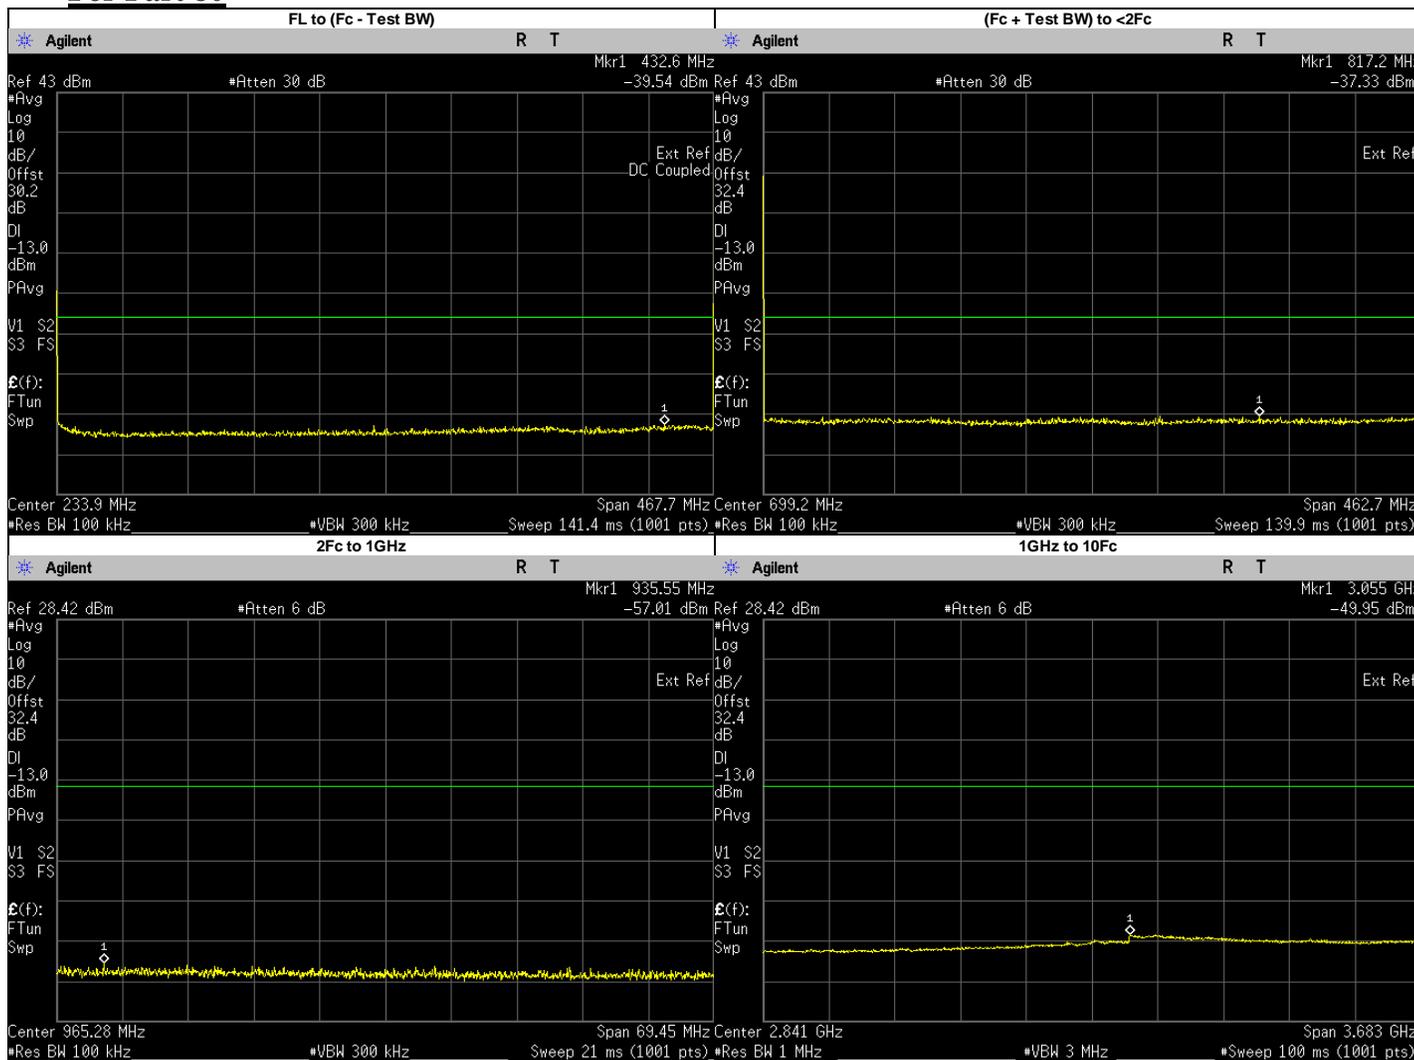


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	432.6000	-39.5440	-13	PASS
(Fc + Test BW) to <2Fc	817.1840	-37.3300	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	935.5500	-57.0162	-13	PASS
	3054.9740	-49.9500	-13	PASS
	1403.3250	-54.0767	-13	PASS
	1871.1000	-53.7403	-13	PASS
	2338.8750	-53.1219	-13	PASS
	2806.6500	-52.2750	-13	PASS
	3274.4250	-50.6583	-13	PASS
	3742.2000	-51.2750	-13	PASS
	4209.9750	-51.7192	-13	PASS
4677.7500	-51.6018	-13	PASS	

**Analog: 467.7750 MHz, 25 kHz Channel Spacing, Max Power  
 For Part 80**

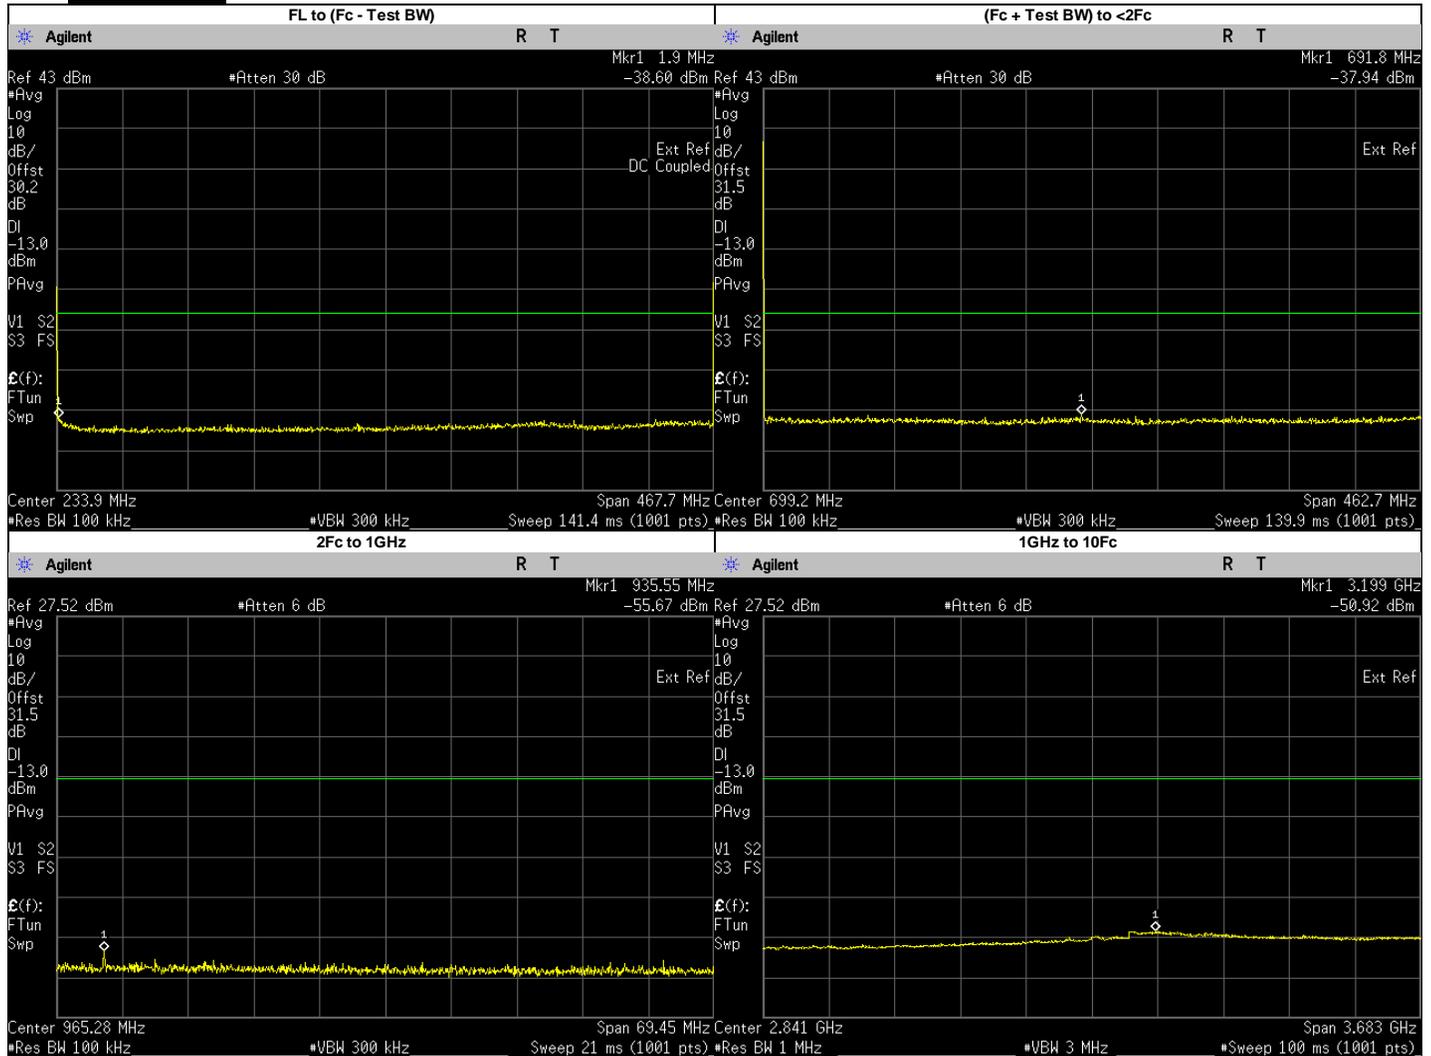


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.9000	-38.6020	-13	PASS
(Fc + Test BW) to <2Fc	691.7874	-37.9400	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	935.5500	-55.6700	-13	PASS
	3198.6020	-50.9200	-13	PASS
	1403.3250	-54.8687	-13	PASS
	1871.1000	-54.7044	-13	PASS
	2338.8750	-54.1884	-13	PASS
	2806.6500	-53.2419	-13	PASS
	3274.4250	-51.2751	-13	PASS
	3742.2000	-52.3542	-13	PASS
	4209.9750	-52.9286	-13	PASS
4677.7500	-52.7167	-13	PASS	

**Analog: 482.0125 MHz, 25 kHz Channel Spacing, Max Power**

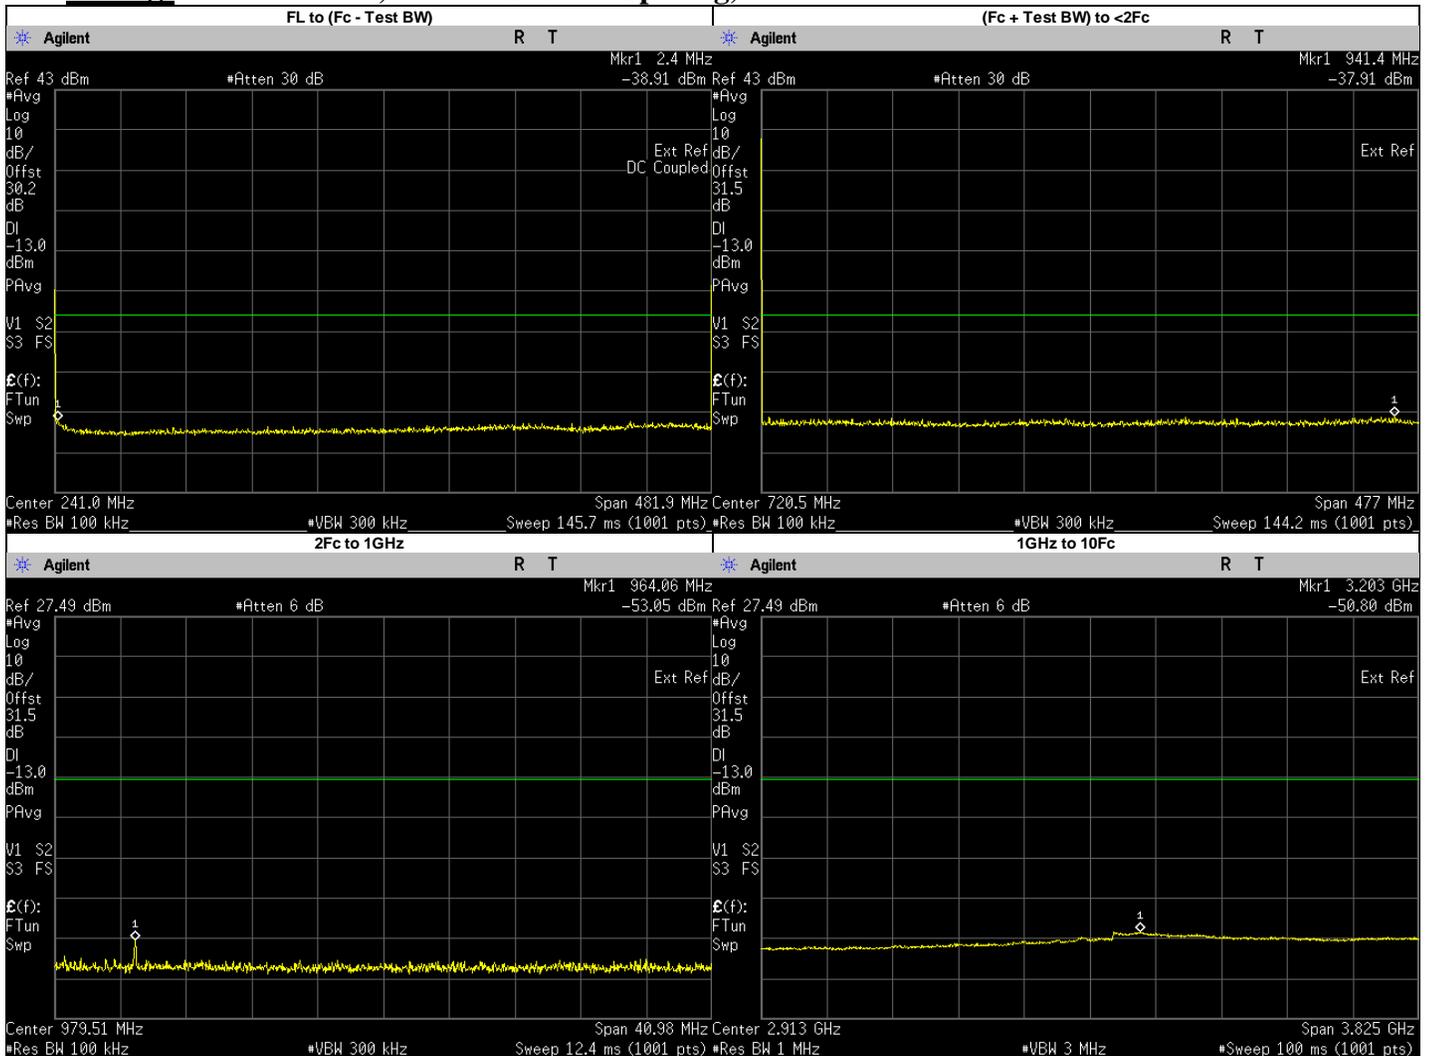


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.4000	-38.9080	-13	PASS
(Fc + Test BW) to <2Fc	941.3776	-37.9100	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	964.0649	-53.0500	-13	PASS
	964.0250	-53.1327	-13	PASS
	3203.2720	-50.8000	-13	PASS
	1446.0370	-54.9111	-13	PASS
	1928.0500	-54.6546	-13	PASS
	2410.0620	-53.9948	-13	PASS
	2892.0750	-52.6368	-13	PASS
	3374.0880	-51.9869	-13	PASS
	3856.1000	-52.3769	-13	PASS
	4338.1130	-52.8732	-13	PASS
4820.1250	-52.6177	-13	PASS	

### Analog: 511.9875 MHz, 25 kHz Channel Spacing, Low Power

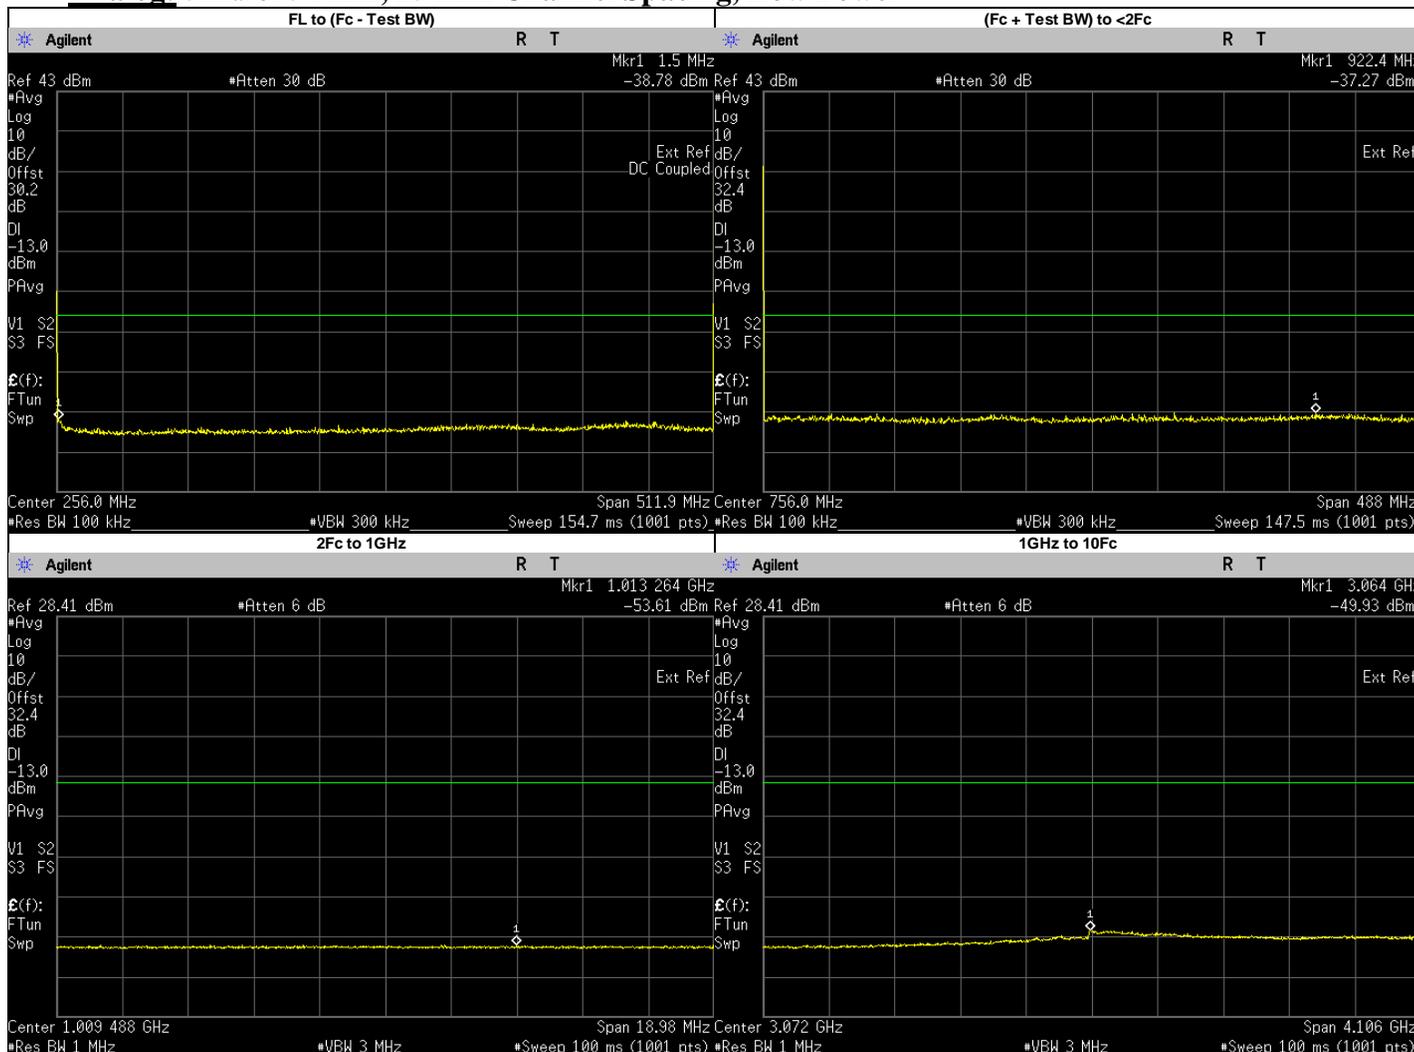


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.5000	-38.7800	-13	PASS
(Fc + Test BW) to <2Fc	922.4150	-37.2700	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	1013.2640	-53.6100	-13	PASS
	3063.7130	-49.9300	-13	PASS
	1023.9750	-54.1764	-13	PASS
	1535.9630	-54.0395	-13	PASS
	2047.9500	-53.2930	-13	PASS
	2559.9370	-52.8846	-13	PASS
	3071.9250	-50.2890	-13	PASS
	3583.9120	-50.9581	-13	PASS
	4095.9000	-51.4708	-13	PASS
	4607.8870	-51.7633	-13	PASS
5119.8750	-51.8346	-13	PASS	

**Analog: 511.9875 MHz, 25 kHz Channel Spacing, Max Power**

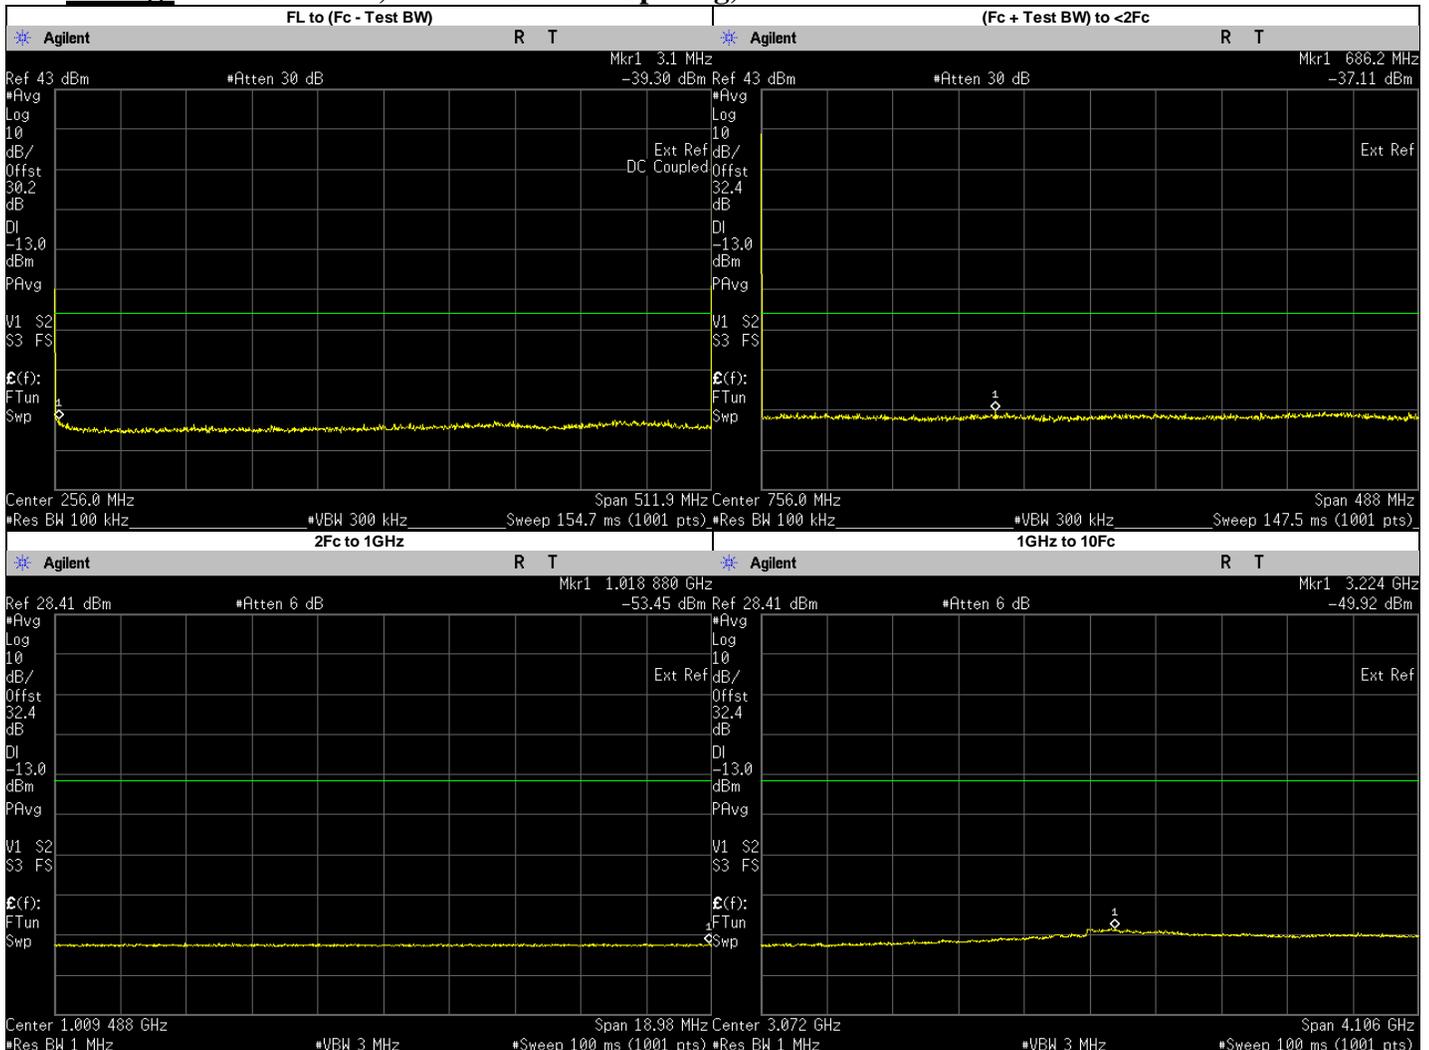

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.1000	-39.3020	-13	PASS
(Fc + Test BW) to <2Fc	686.2445	-37.1100	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	1018.8800	-53.4500	-13	PASS
	3223.8430	-49.9200	-13	PASS
	1023.9750	-54.1309	-13	PASS
	1535.9630	-53.8576	-13	PASS
	2047.9500	-53.5985	-13	PASS
	2559.9370	-52.8015	-13	PASS
	3071.9250	-50.2320	-13	PASS
	3583.9120	-51.0409	-13	PASS
	4095.9000	-51.6929	-13	PASS
	4607.8870	-51.8407	-13	PASS
5119.8750	-51.9566	-13	PASS	

**Analog: 519.9875 MHz, 25 kHz Channel Spacing, Max Power**  
**Not for FCC review**

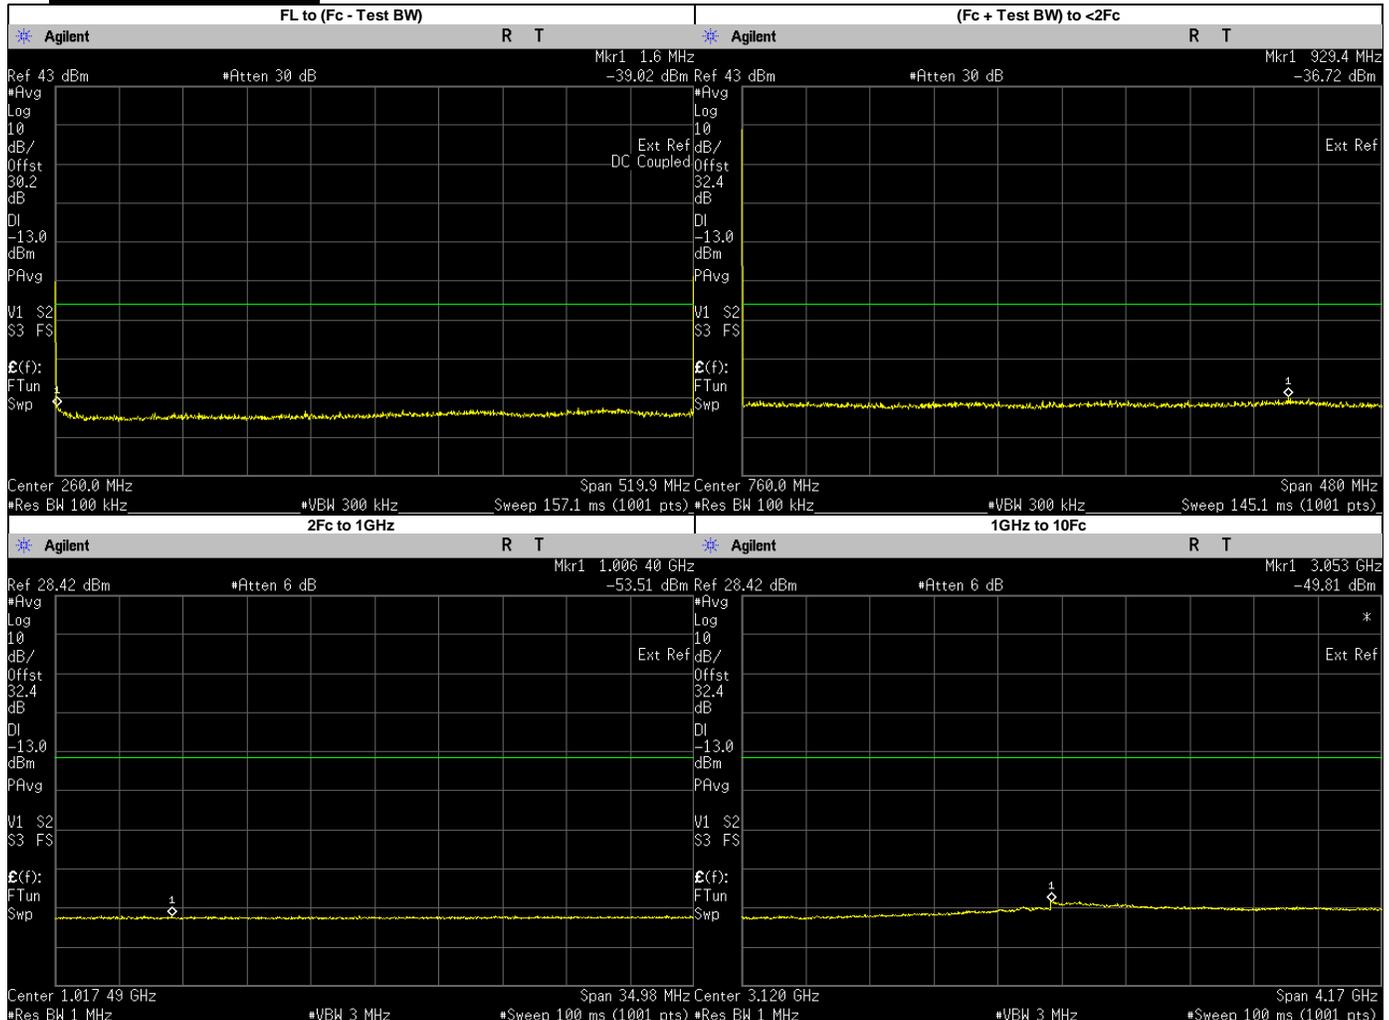


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6000	-39.0200	-13	PASS
(Fc + Test BW) to <2Fc	929.4465	-36.7200	-13	PASS
2Fc to 1GHz 1GHz to 10Fc	1006.4000	-53.5100	-13	PASS
	3053.2070	-49.8100	-13	PASS
	1039.9750	-53.9759	-13	PASS
	1559.9630	-53.8350	-13	PASS
	2079.9500	-53.5089	-13	PASS
	2599.9370	-52.4814	-13	PASS
	3119.9250	-50.5760	-13	PASS
	3639.9120	-51.2641	-13	PASS
	4159.9000	-51.6487	-13	PASS
	4679.8870	-51.6726	-13	PASS
5199.8750	-51.9892	-13	PASS	

### 6.9.3. Test Result (Digital)


**Digital: 380.0125 MHz, 12.5 kHz Channel Spacing, Max Power**

**Not for FCC review**

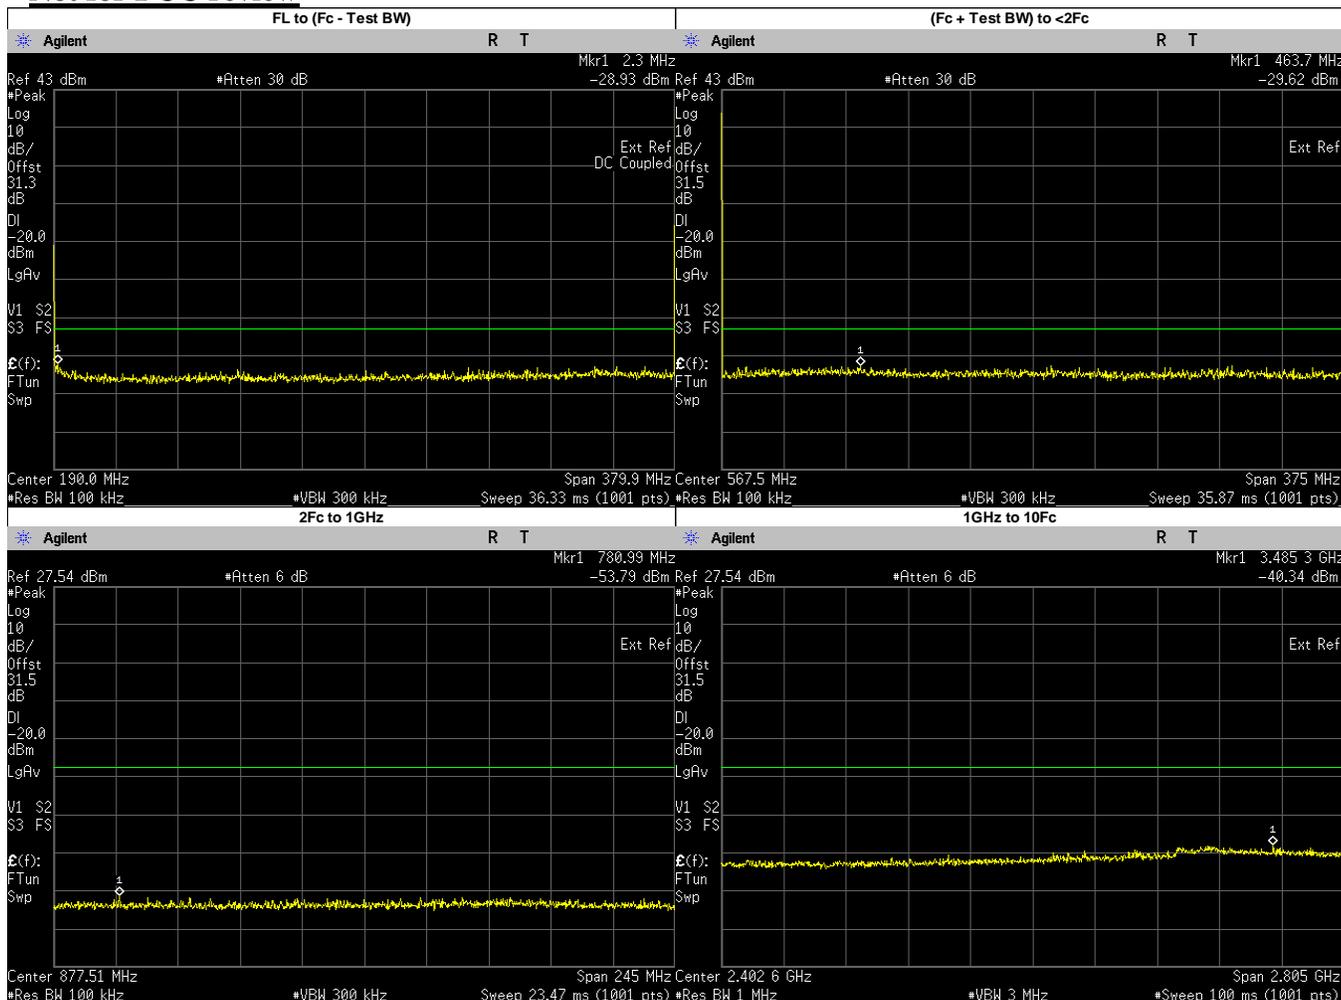


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.3000	-28.9350	-20	PASS
(Fc + Test BW) to <2Fc	463.6835	-29.6200	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	780.9923	-53.7900	-20	PASS
	760.0250	-55.4369	-20	PASS
	3485.3410	-40.3400	-20	PASS
	1140.0370	-44.6734	-20	PASS
	1520.0500	-45.2880	-20	PASS
	1900.0620	-45.3282	-20	PASS
	2280.0750	-44.8619	-20	PASS
	2660.0880	-44.5600	-20	PASS
	3040.1000	-42.8648	-20	PASS
	3420.1130	-42.6507	-20	PASS
3800.1250	-43.1990	-20	PASS	

**Digital: 406.2000 MHz, 12.5 kHz Channel Spacing, Max Power**

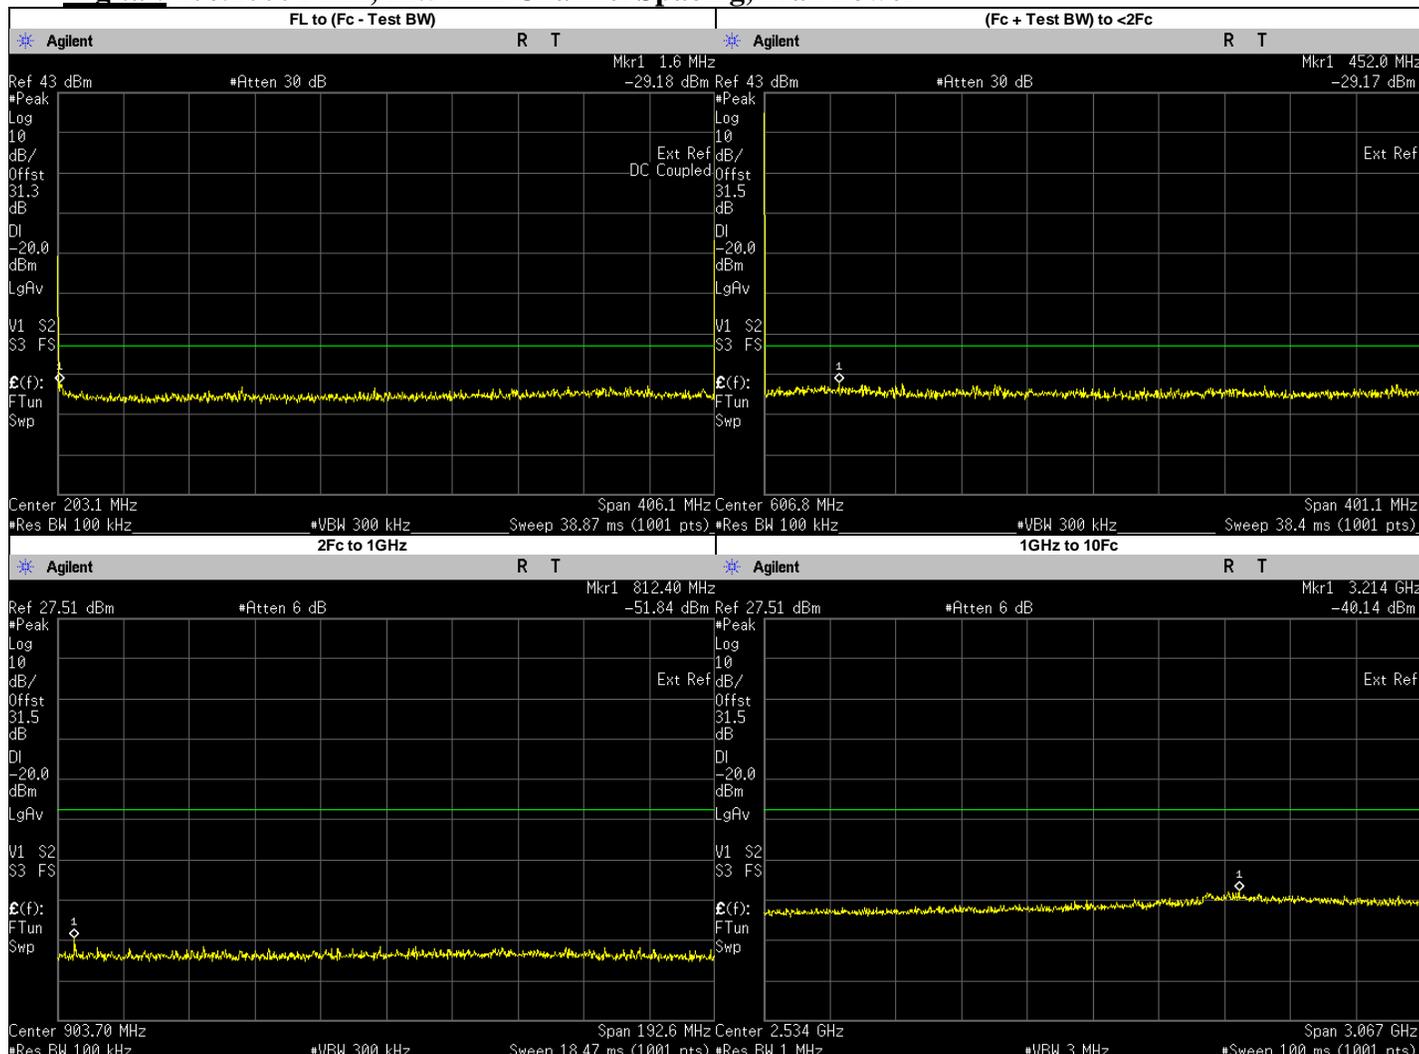


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6000	-29.1790	-20	PASS
(Fc + Test BW) to <2Fc	451.9861	-29.1700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	812.4000	-51.8400	-20	PASS
	3214.3740	-40.1400	-20	PASS
	1218.6000	-45.6693	-20	PASS
	1624.8000	-45.2646	-20	PASS
	2031.0000	-44.9346	-20	PASS
	2437.2000	-44.6489	-20	PASS
	2843.4000	-43.6462	-20	PASS
	3249.6000	-42.0953	-20	PASS
	3655.8000	-42.4853	-20	PASS
4062.0000	-42.9397	-20	PASS	

**Digital: 450.0250 MHz, 12.5 kHz Channel Spacing, Low Power**

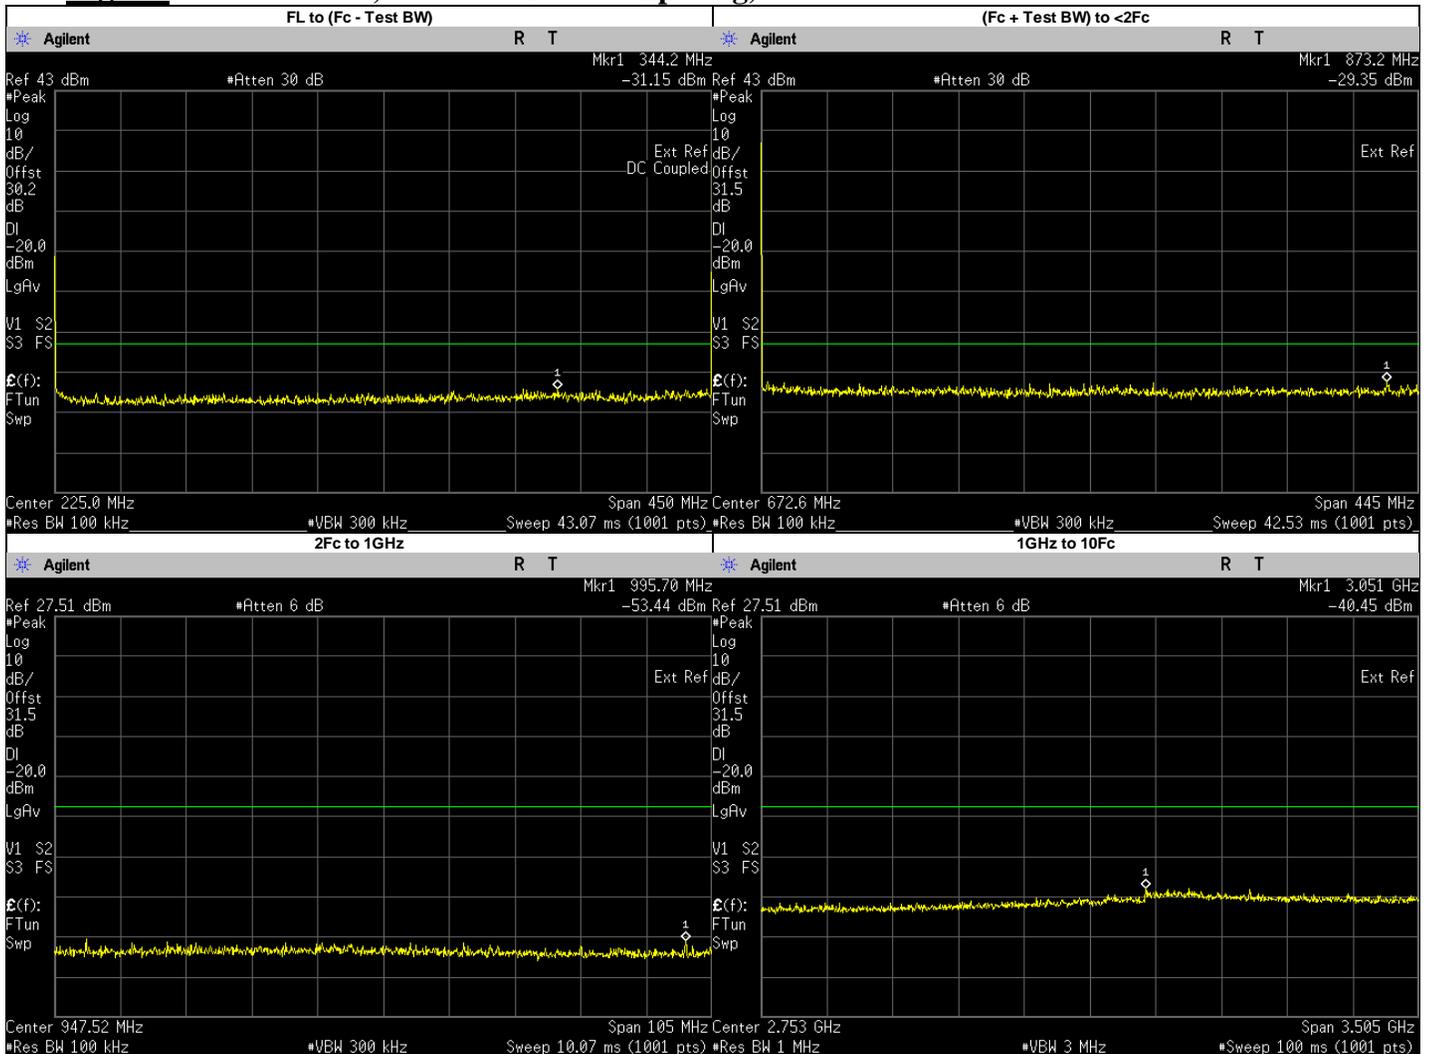


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	344.2000	-31.1490	-20	PASS
(Fc + Test BW) to <2Fc	873.2466	-29.3500	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	995.6970	-53.4400	-20	PASS
	900.0500	-53.5316	-20	PASS
	3050.9710	-40.4500	-20	PASS
	1350.0750	-45.6081	-20	PASS
	1800.1000	-45.0061	-20	PASS
	2250.1250	-44.4209	-20	PASS
	2700.1500	-43.7090	-20	PASS
	3150.1750	-41.7147	-20	PASS
	3600.2000	-42.7271	-20	PASS
	4050.2250	-42.7600	-20	PASS
4500.2500	-43.3518	-20	PASS	

**Digital: 450.0250 MHz, 12.5 kHz Channel Spacing, Max Power**

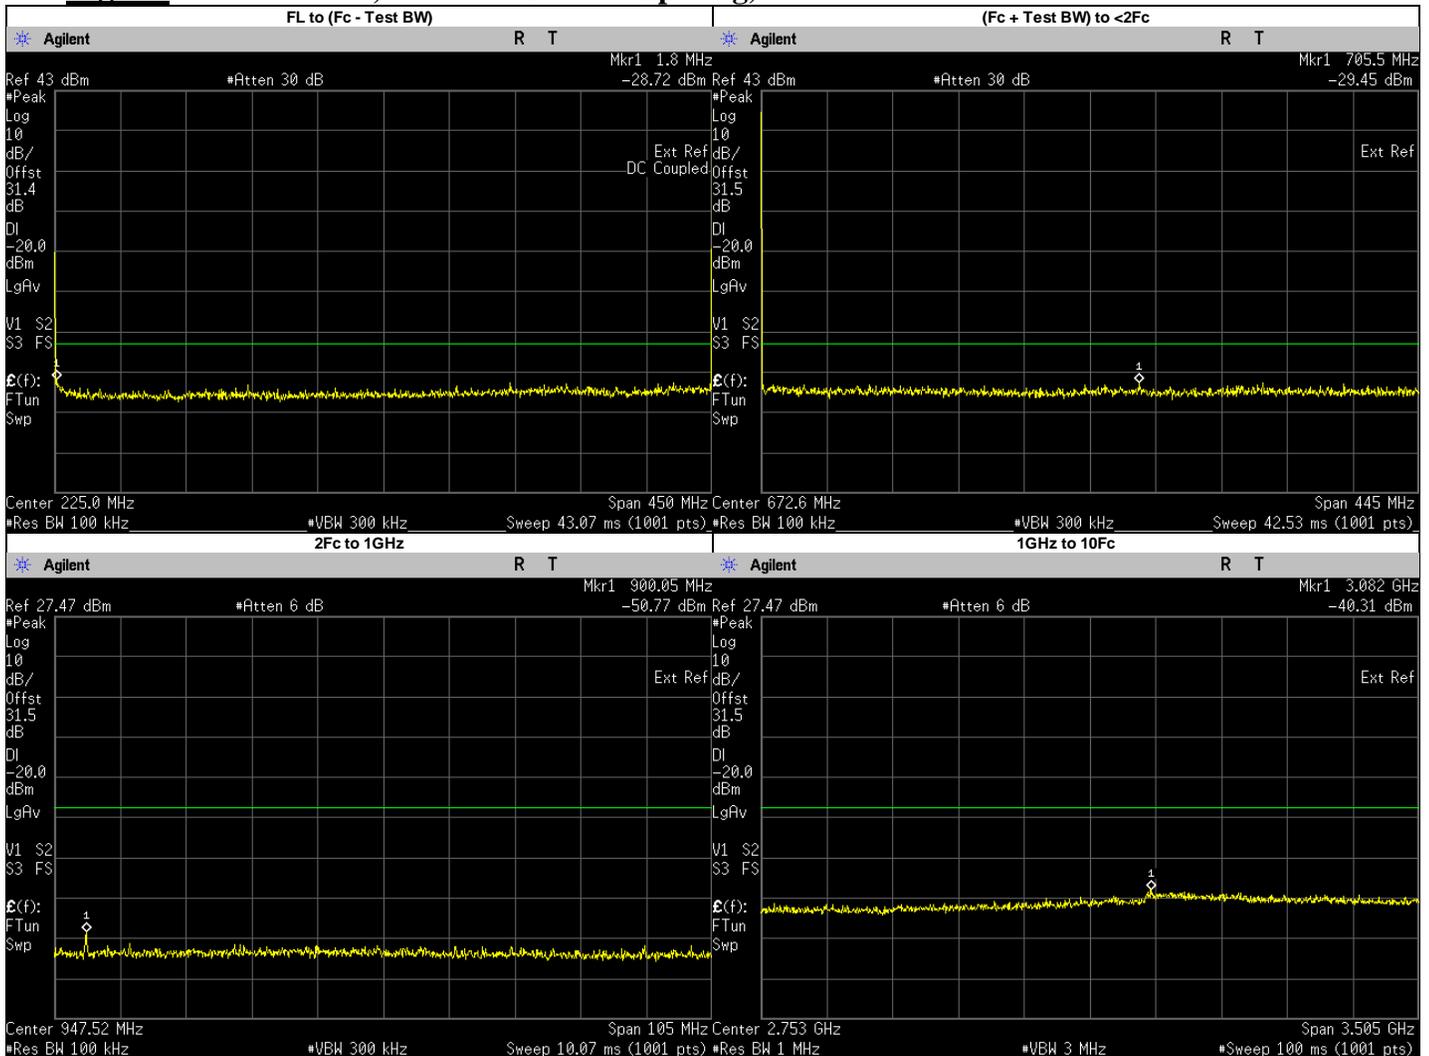


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.8000	-28.7150	-20	PASS
(Fc + Test BW) to <2Fc	705.4935	-29.4500	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	900.0500	-50.7700	-20	PASS
	3082.1190	-40.3100	-20	PASS
	1350.0750	-45.0444	-20	PASS
	1800.1000	-44.9523	-20	PASS
	2250.1250	-44.6734	-20	PASS
	2700.1500	-43.8309	-20	PASS
	3150.1750	-41.9410	-20	PASS
	3600.2000	-42.7933	-20	PASS
	4050.2250	-42.5968	-20	PASS
4500.2500	-42.8356	-20	PASS	

**Digital: 459.1250 MHz, 12.5 kHz Channel Spacing, Max Power**

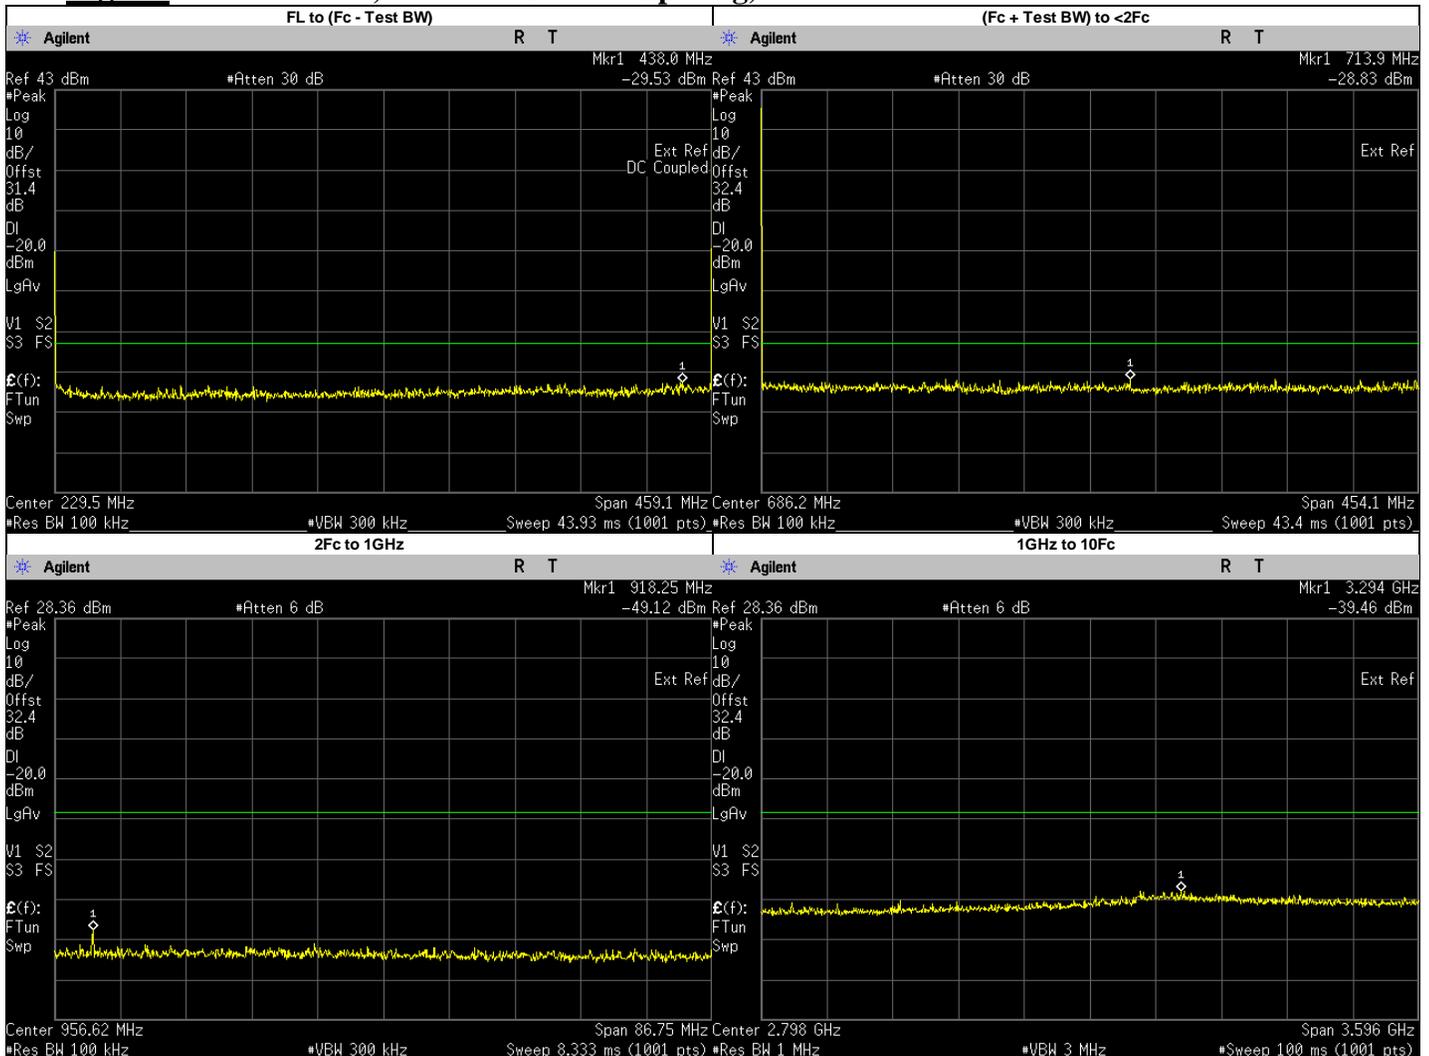


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	438.0000	-29.5330	-20	PASS
(Fc + Test BW) to <2Fc	713.9141	-28.8300	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	918.2500	-49.1200	-20	PASS
	3294.4070	-39.4600	-20	PASS
	1377.3750	-44.1973	-20	PASS
	1836.5000	-44.0256	-20	PASS
	2295.6250	-43.3244	-20	PASS
	2754.7500	-43.4262	-20	PASS
	3213.8750	-41.0037	-20	PASS
	3673.0000	-41.6927	-20	PASS
	4132.1250	-42.0809	-20	PASS
4591.2500	-42.6311	-20	PASS	

**Digital: 467.7750 MHz, 12.5 kHz Channel Spacing, Max Power**

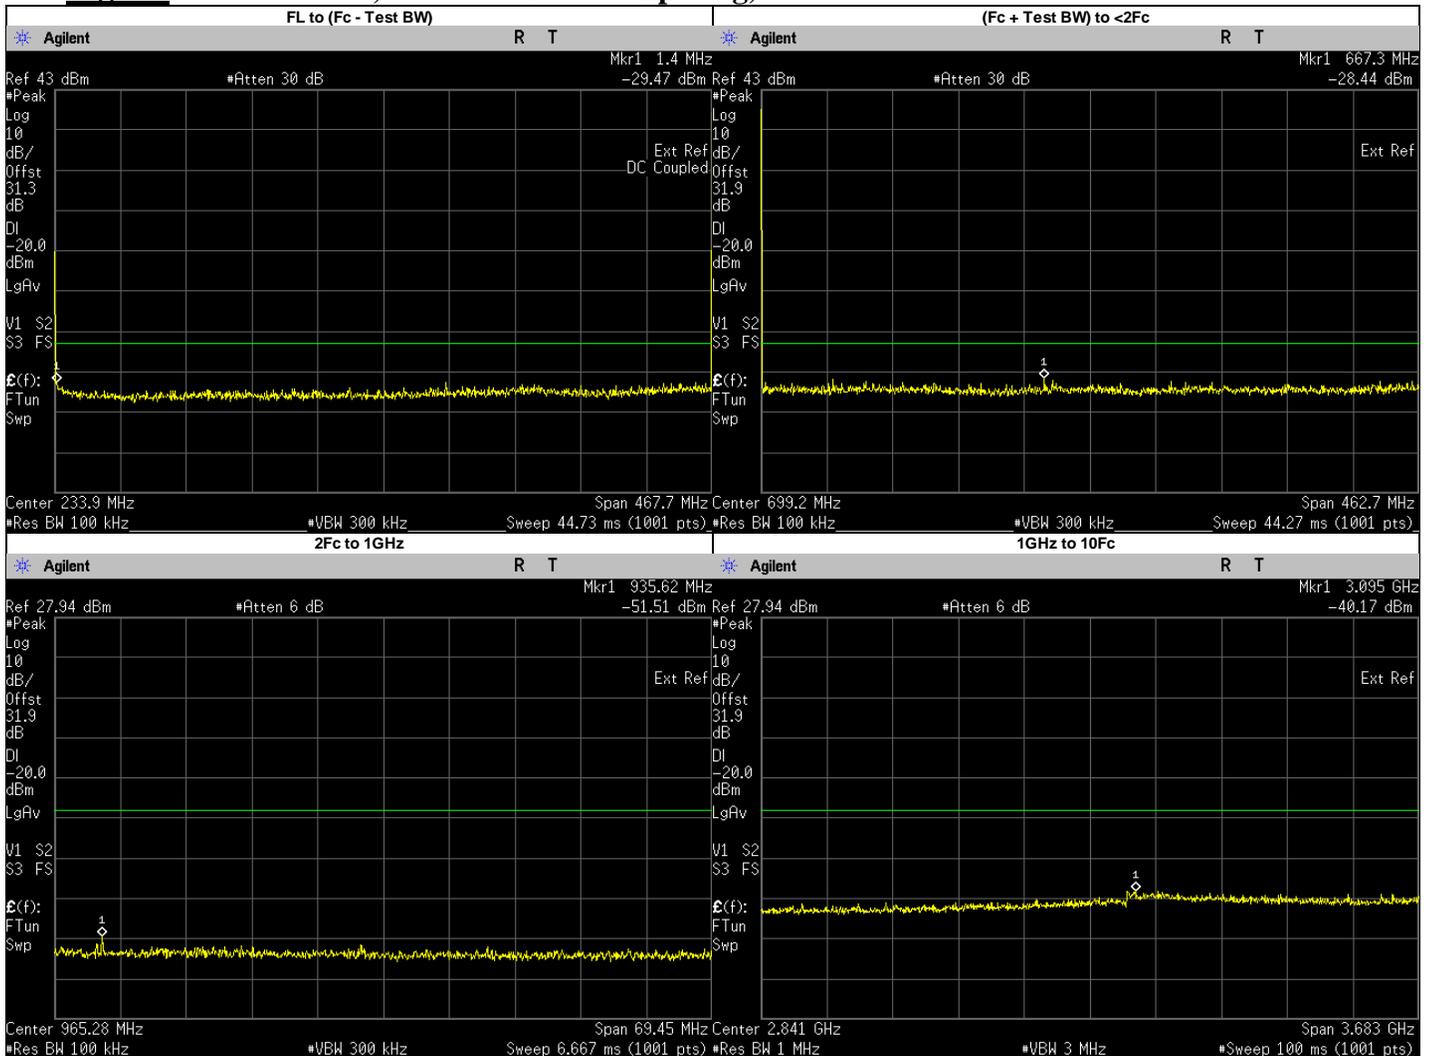


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4000	-29.4730	-20	PASS
(Fc + Test BW) to <2Fc	667.2633	-28.4400	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	935.6199	-51.5100	-20	PASS
	935.5500	-52.4089	-20	PASS
	3095.4850	-40.1700	-20	PASS
	1403.3250	-44.4992	-20	PASS
	1871.1000	-44.4514	-20	PASS
	2338.8750	-44.3370	-20	PASS
	2806.6500	-43.3084	-20	PASS
	3274.4250	-40.9126	-20	PASS
	3742.2000	-42.6008	-20	PASS
	4209.9750	-42.4658	-20	PASS
4677.7500	-42.6945	-20	PASS	

**Digital: 482.0125 MHz, 12.5 kHz Channel Spacing, Max Power**

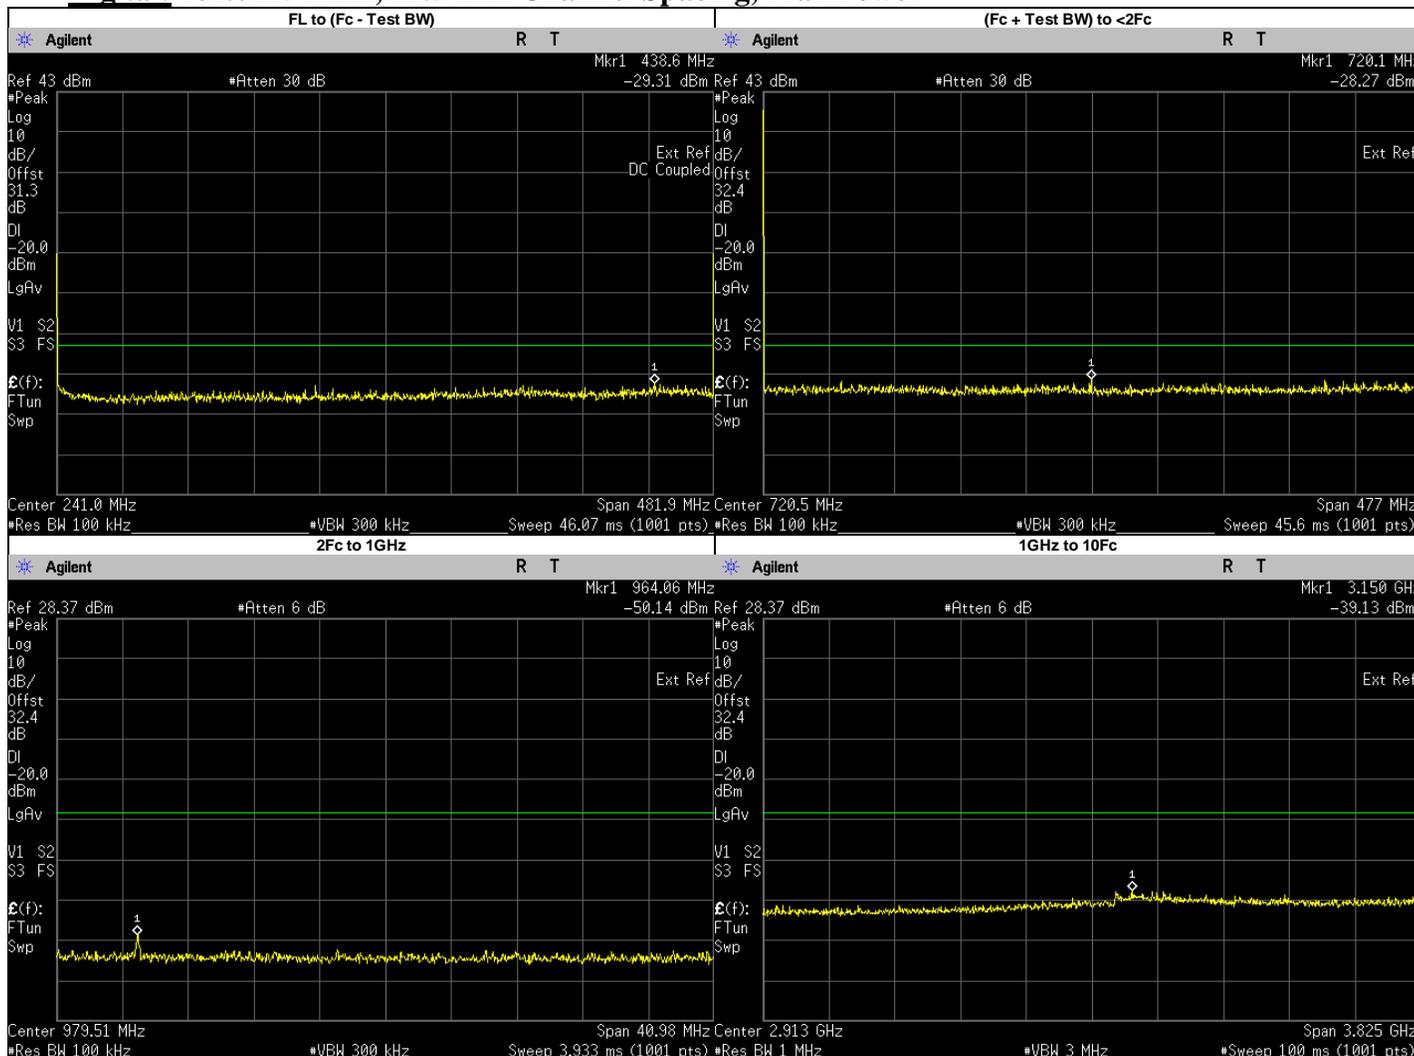


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	438.6000	-29.3090	-20	PASS
(Fc + Test BW) to <2Fc	720.0702	-28.2700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	964.0649	-50.1400	-20	PASS
	964.0250	-50.6146	-20	PASS
	3149.7200	-39.1300	-20	PASS
	1446.0370	-44.7565	-20	PASS
	1928.0500	-44.1074	-20	PASS
	2410.0620	-44.1504	-20	PASS
	2892.0750	-42.0034	-20	PASS
	3374.0880	-41.3097	-20	PASS
	3856.1000	-41.6894	-20	PASS
	4338.1130	-41.9836	-20	PASS
4820.1250	-42.1877	-20	PASS	

**Digital: 511.9875 MHz, 12.5 kHz Channel Spacing, Low Power**

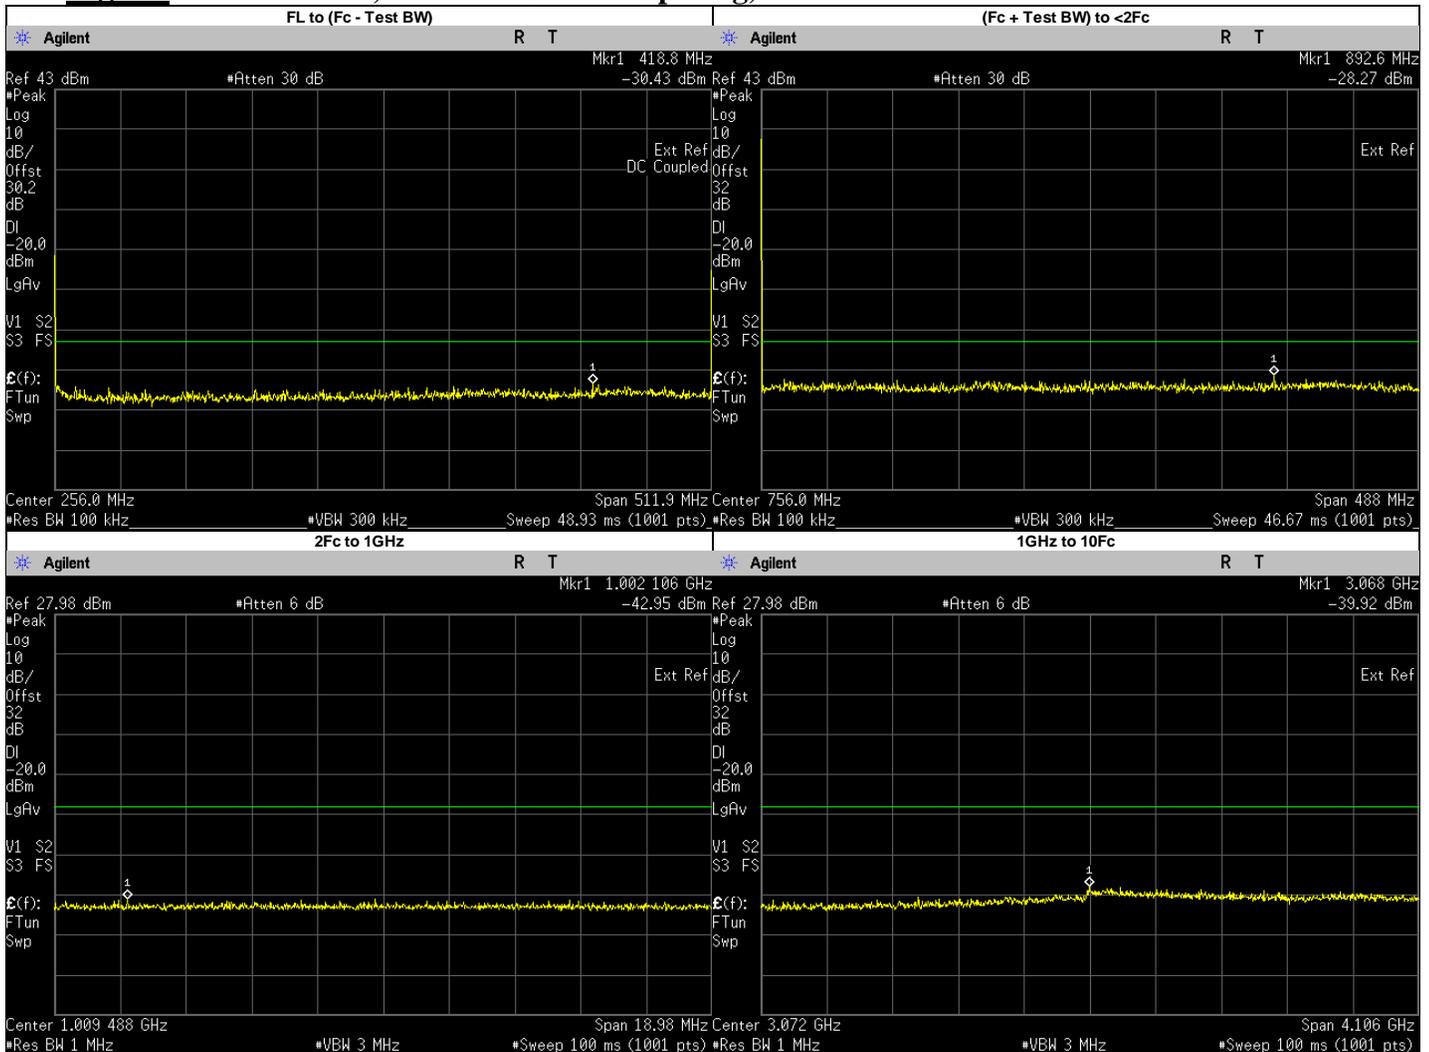


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	418.8000	-30.4310	-20	PASS
(Fc + Test BW) to <2Fc	892.6497	-28.2700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1002.1060	-42.9500	-20	PASS
	3067.8190	-39.9200	-20	PASS
	1023.9750	-44.5112	-20	PASS
	1535.9630	-45.2970	-20	PASS
	2047.9500	-44.2877	-20	PASS
	2559.9370	-43.5371	-20	PASS
	3071.9250	-41.1230	-20	PASS
	3583.9120	-41.6384	-20	PASS
	4095.9000	-42.6417	-20	PASS
	4607.8870	-43.0894	-20	PASS
5119.8750	-42.9148	-20	PASS	

**Digital: 511.9875 MHz, 12.5 kHz Channel Spacing, Max Power**

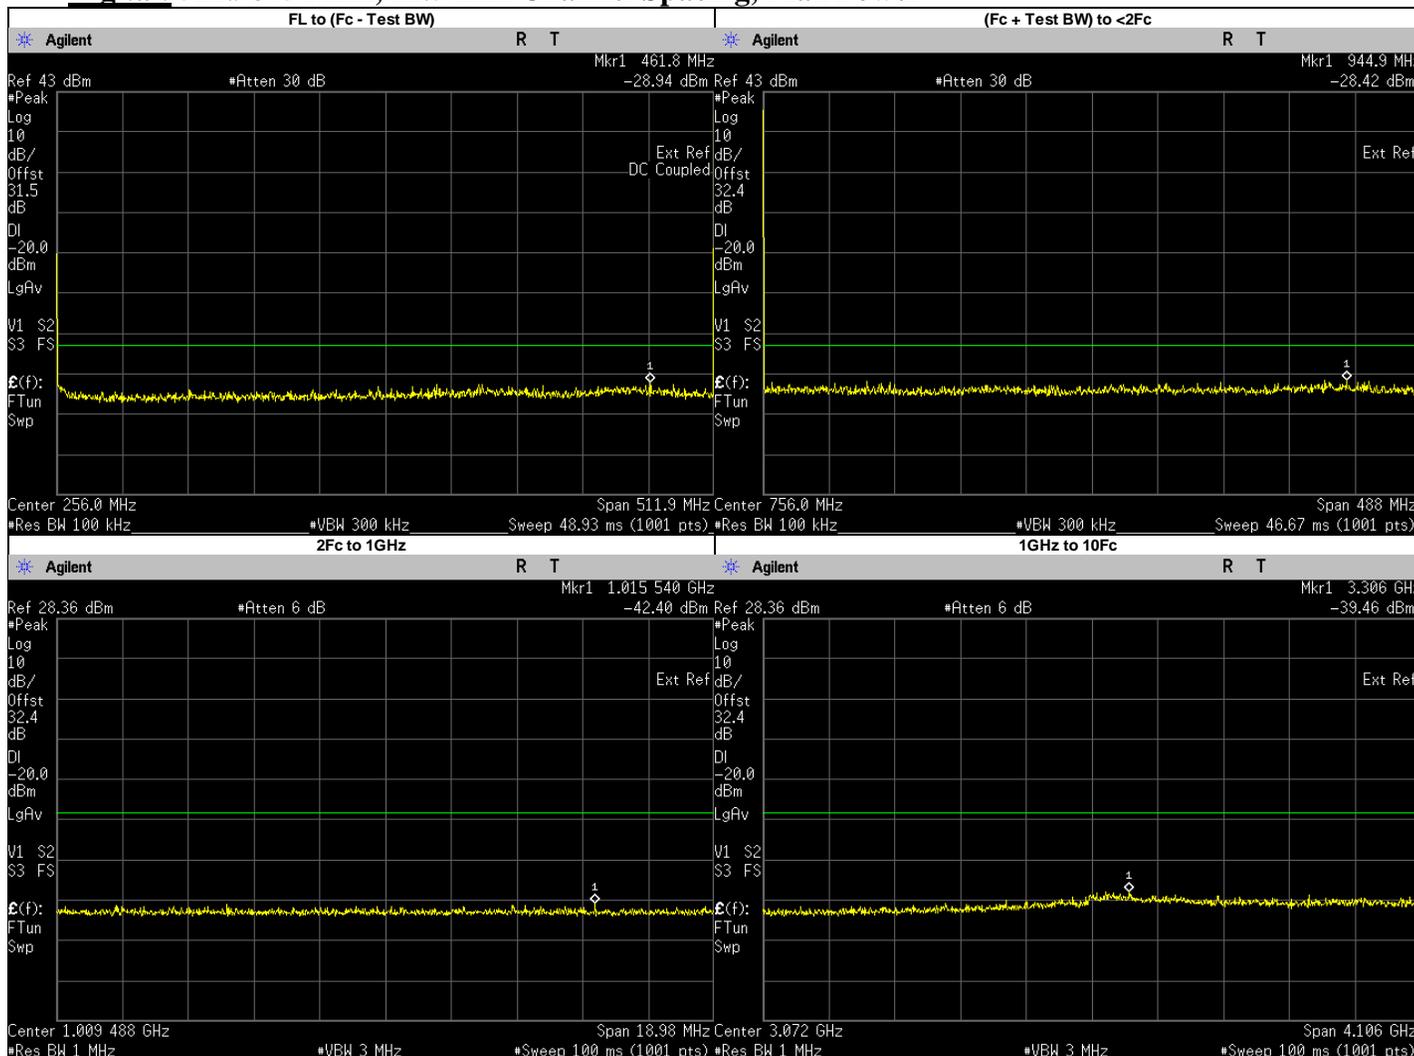


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	461.8000	-28.9420	-20	PASS
(Fc + Test BW) to <2Fc	944.8610	-28.4200	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1015.5400	-42.4000	-20	PASS
	3305.9610	-39.4550	-20	PASS
	1023.9750	-44.9020	-20	PASS
	1535.9630	-43.8217	-20	PASS
	2047.9500	-43.9138	-20	PASS
	2559.9370	-43.5421	-20	PASS
	3071.9250	-41.1820	-20	PASS
	3583.9120	-41.6145	-20	PASS
	4095.9000	-41.5887	-20	PASS
	4607.8870	-42.4609	-20	PASS
5119.8750	-42.5644	-20	PASS	

**Digital: 519.9875 MHz, 12.5 kHz Channel Spacing, Max Power**  
**Not for FCC review**

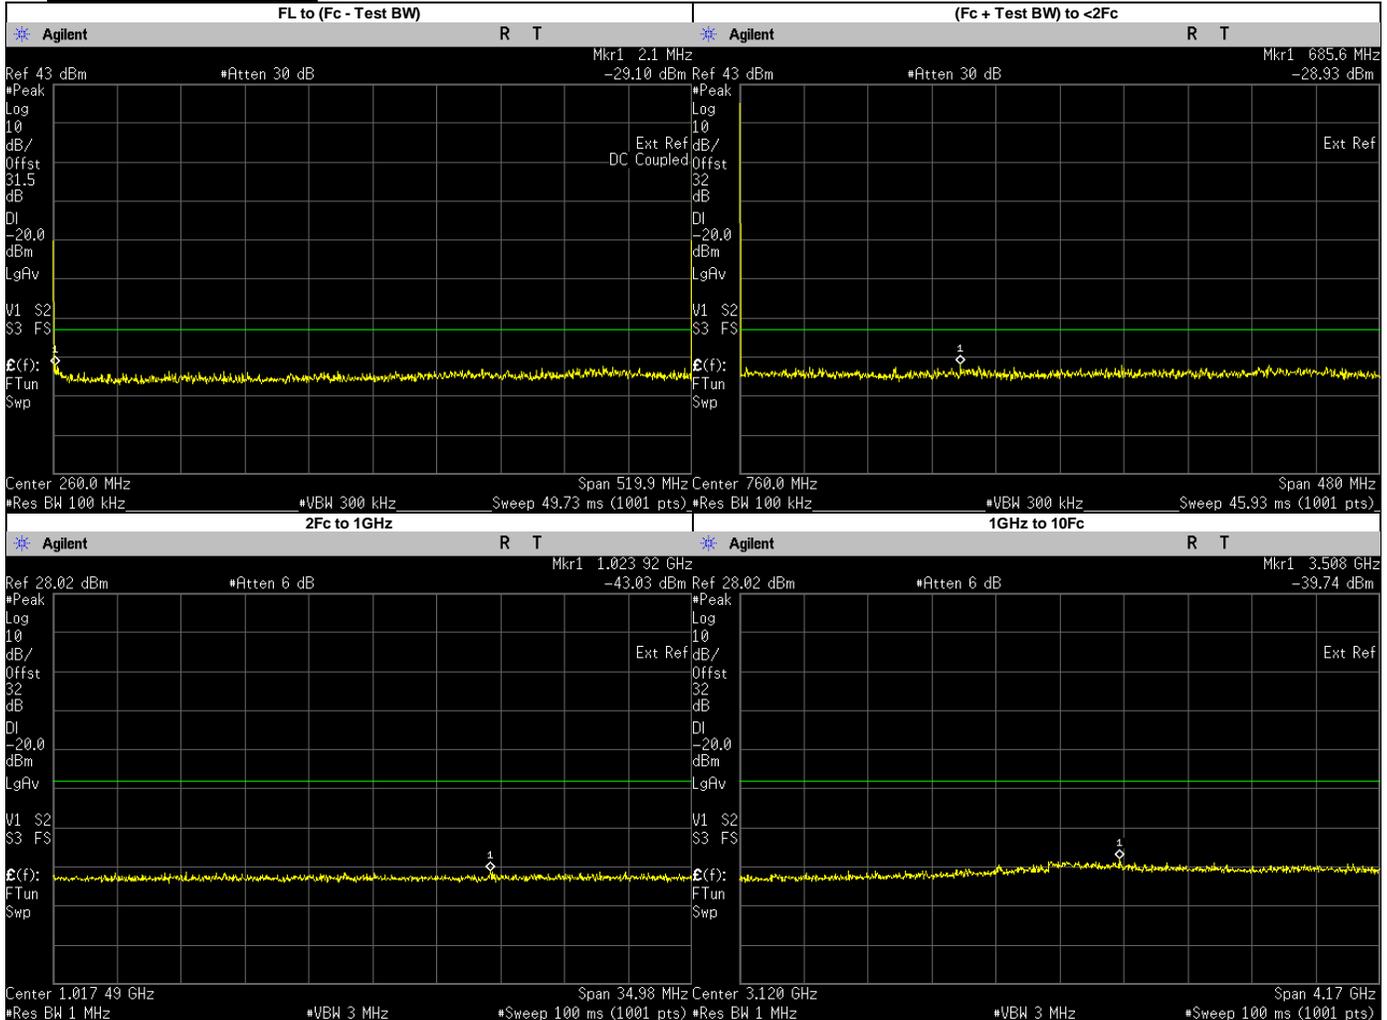


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.1000	-29.1040	-20	PASS
(Fc + Test BW) to <2Fc	685.6290	-28.9300	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1023.9230	-43.0300	-20	PASS
	3507.7260	-39.7400	-20	PASS
	1039.9750	-44.3956	-20	PASS
	1559.9630	-44.8000	-20	PASS
	2079.9500	-44.5266	-20	PASS
	2599.9370	-43.5175	-20	PASS
	3119.9250	-41.5100	-20	PASS
	3639.9120	-42.4570	-20	PASS
	4159.9000	-42.5630	-20	PASS
	4679.8870	-43.0388	-20	PASS
5199.8750	-42.6444	-20	PASS	

**Phase II: 380.0125 MHz, 12.5 kHz Channel Spacing, Max Power**  
**Not for FCC review**

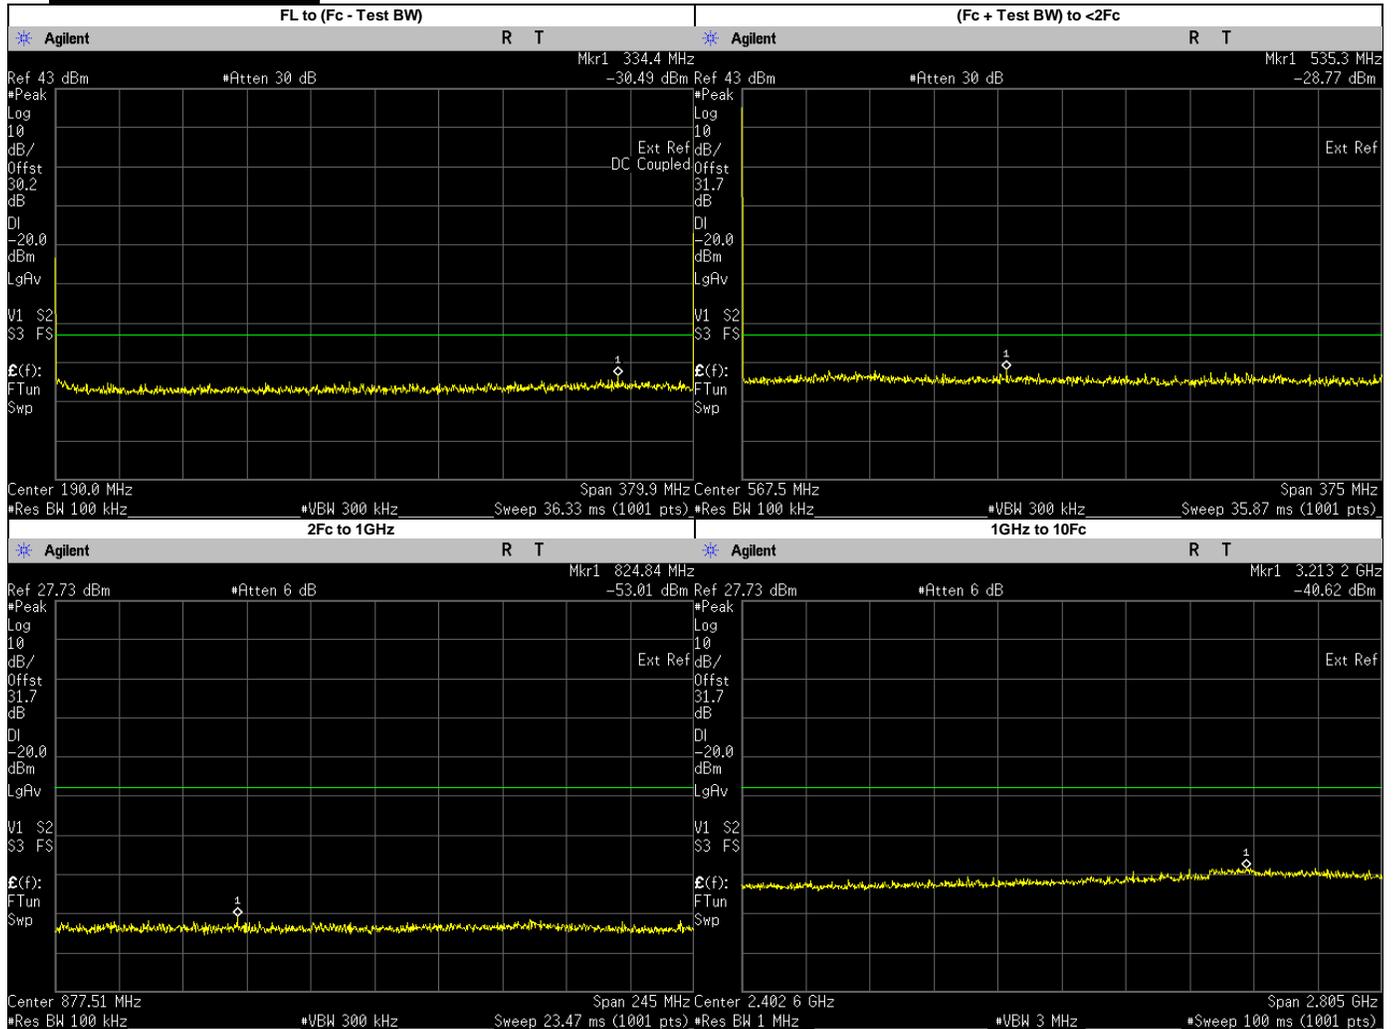


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	334.4000	-30.4850	-20	PASS
(Fc + Test BW) to <2Fc	535.3003	-28.7700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	824.8429	-53.0100	-20	PASS
	760.0250	-54.6331	-20	PASS
	3213.2440	-40.6200	-20	PASS
	1140.0370	-45.3753	-20	PASS
	1520.0500	-44.8059	-20	PASS
	1900.0620	-44.4890	-20	PASS
	2280.0750	-44.1052	-20	PASS
	2660.0880	-44.2302	-20	PASS
	3040.1000	-43.1024	-20	PASS
	3420.1130	-42.6450	-20	PASS
3800.1250	-42.8363	-20	PASS	

### Phase II: 406.2000 MHz, 12.5 kHz Channel Spacing, Max Power

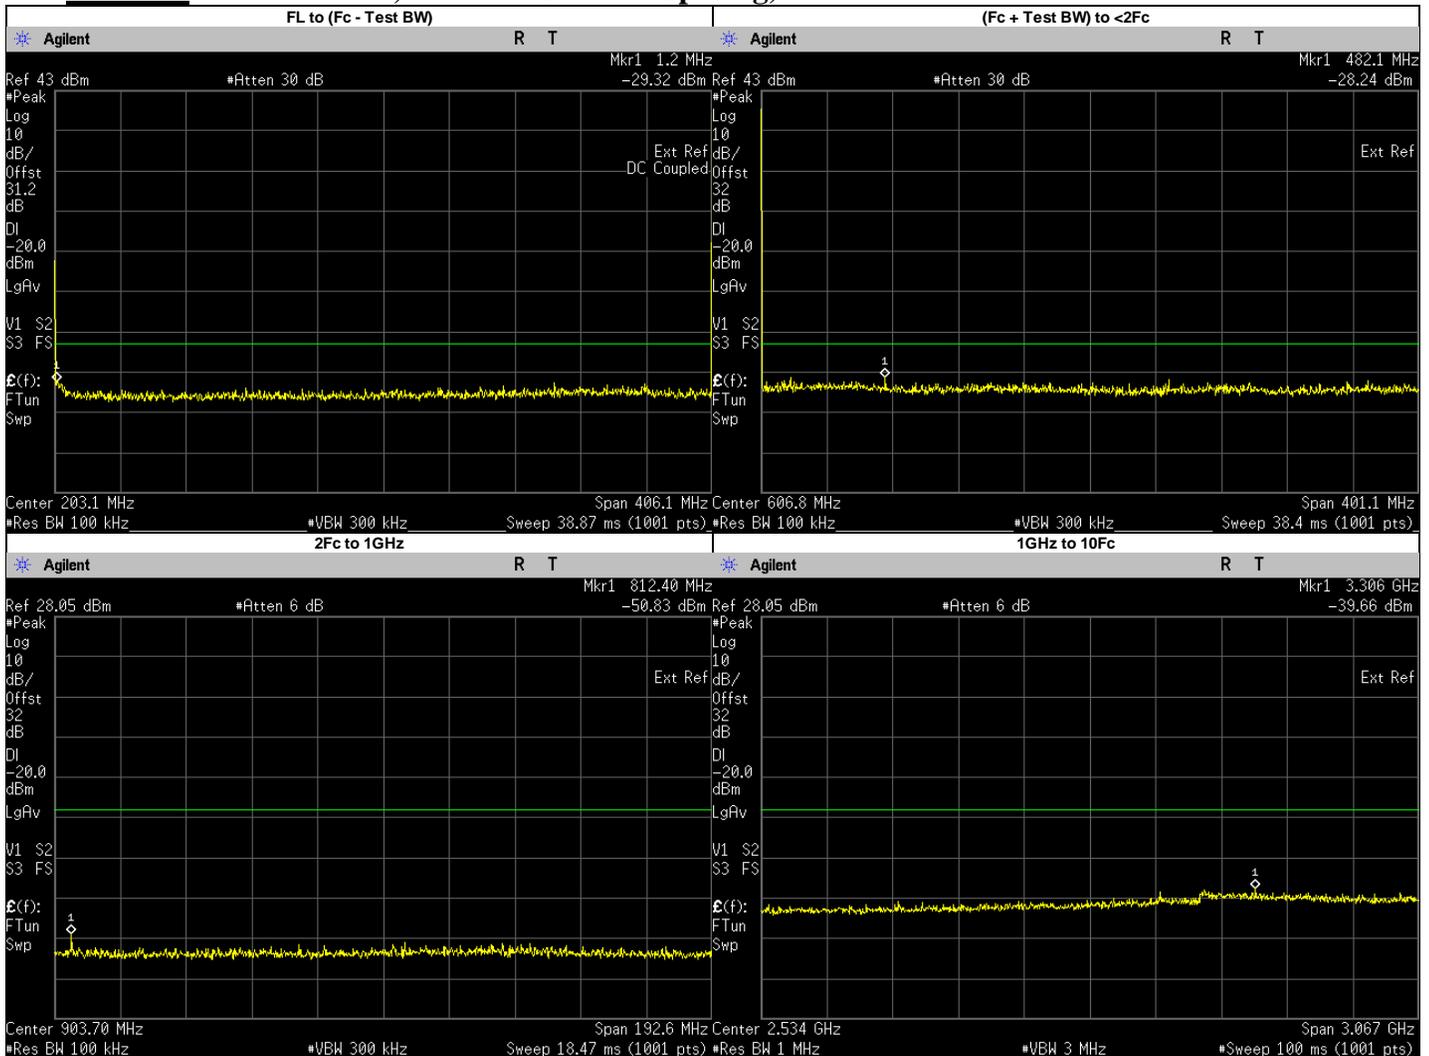


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.2000	-29.3240	-20	PASS
(Fc + Test BW) to <2Fc	482.0719	-28.2400	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	812.4000	-50.8300	-20	PASS
	3306.3840	-39.6600	-20	PASS
	1218.6000	-45.1866	-20	PASS
	1624.8000	-43.9468	-20	PASS
	2031.0000	-44.4008	-20	PASS
	2437.2000	-44.2329	-20	PASS
	2843.4000	-43.0709	-20	PASS
	3249.6000	-40.8644	-20	PASS
	3655.8000	-42.2070	-20	PASS
4062.0000	-42.5098	-20	PASS	

**Phase II: 450.0250 MHz, 12.5 kHz Channel Spacing, Low Power**

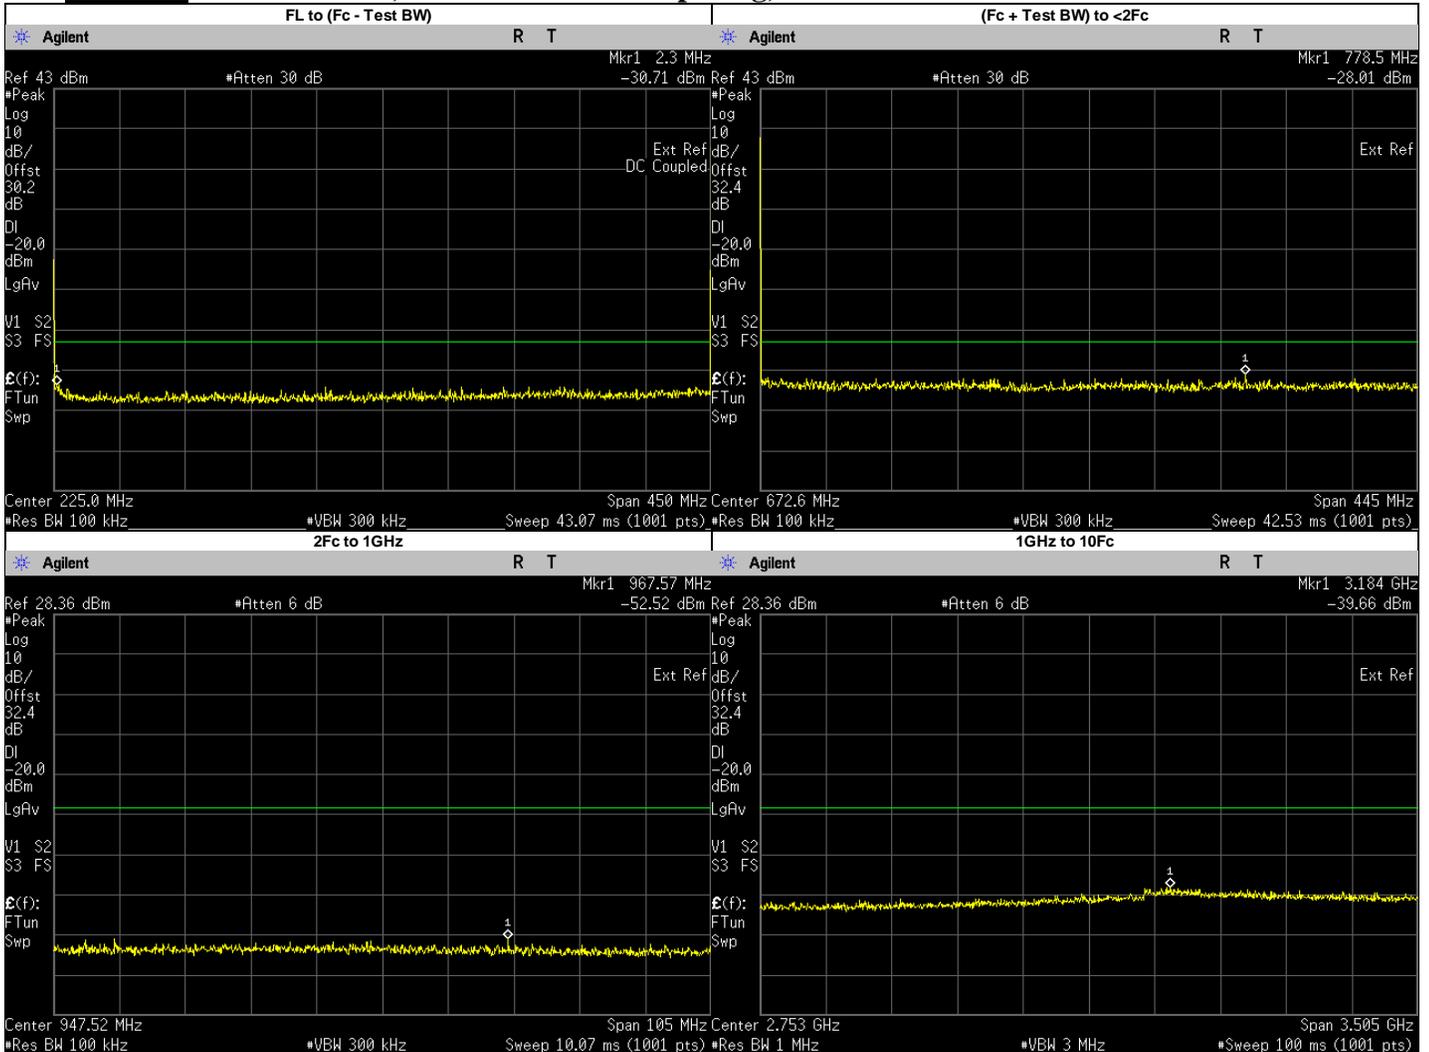


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.3000	-30.7140	-20	PASS
(Fc + Test BW) to <2Fc	778.4683	-28.0100	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	967.5705	-52.5200	-20	PASS
	900.0500	-53.1067	-20	PASS
	3183.7710	-39.6600	-20	PASS
	1350.0750	-45.0224	-20	PASS
	1800.1000	-44.4455	-20	PASS
	2250.1250	-43.8987	-20	PASS
	2700.1500	-43.1771	-20	PASS
	3150.1750	-41.4081	-20	PASS
	3600.2000	-40.4411	-20	PASS
	4050.2250	-41.6533	-20	PASS
4500.2500	-42.1789	-20	PASS	

### Phase II: 450.0250 MHz, 12.5 kHz Channel Spacing, Max Power

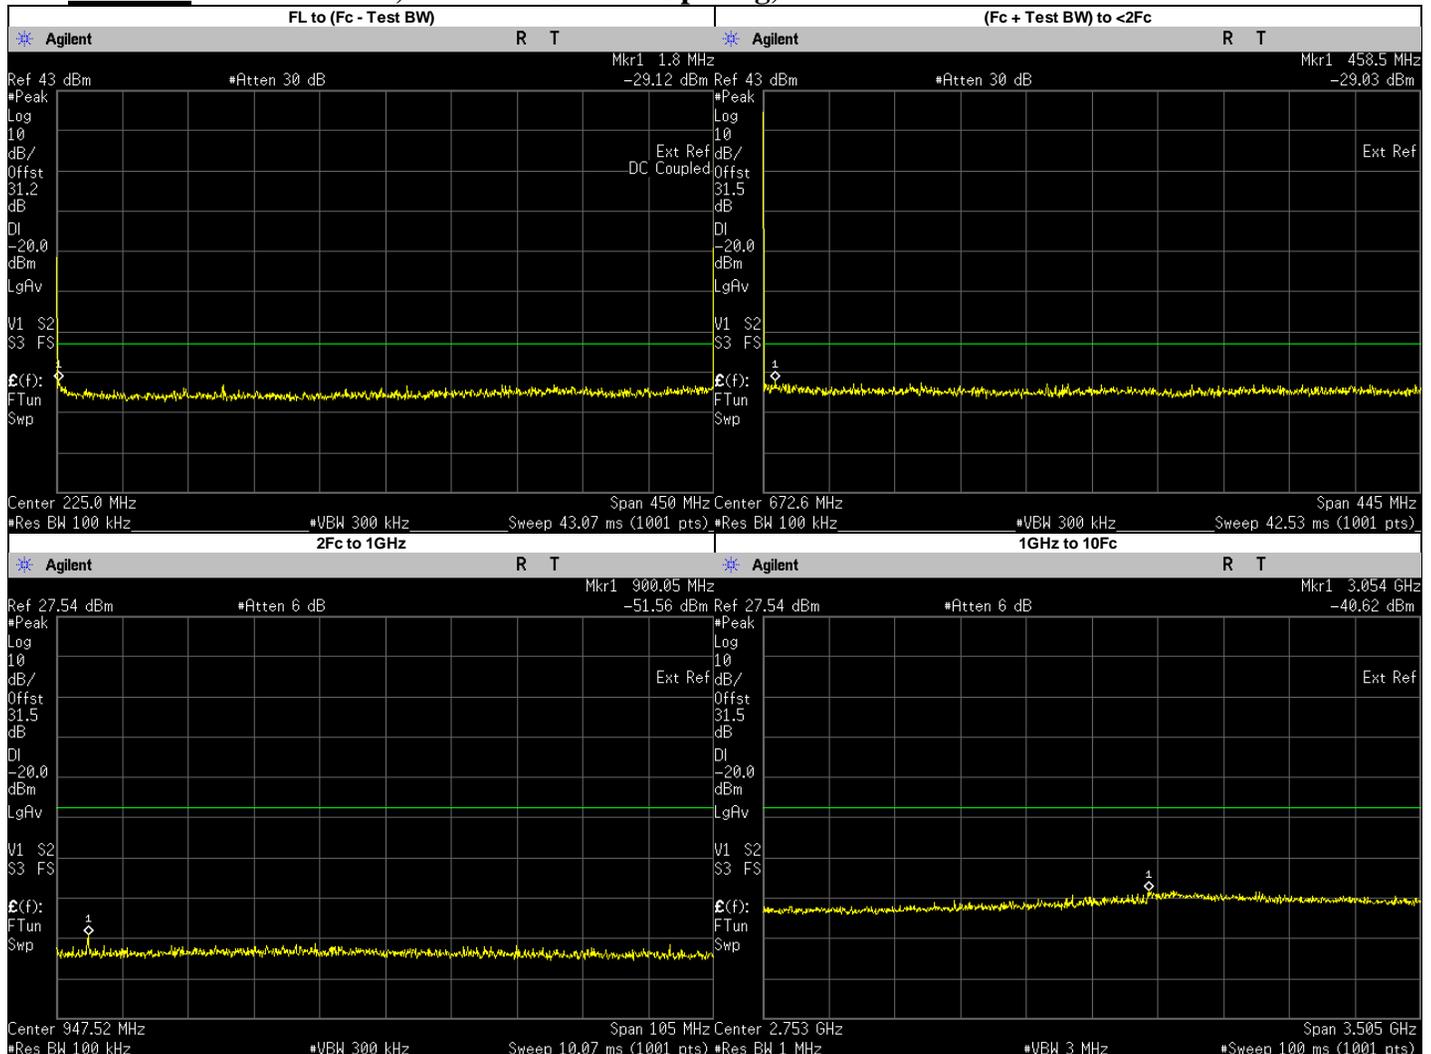


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.8000	-29.1230	-20	PASS
(Fc + Test BW) to <2Fc	458.5362	-29.0300	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	900.0500	-51.5600	-20	PASS
	3054.0770	-40.6200	-20	PASS
	1350.0750	-45.2006	-20	PASS
	1800.1000	-44.7268	-20	PASS
	2250.1250	-44.2895	-20	PASS
	2700.1500	-43.9290	-20	PASS
	3150.1750	-41.8678	-20	PASS
	3600.2000	-42.9628	-20	PASS
	4050.2250	-43.0651	-20	PASS
4500.2500	-43.3926	-20	PASS	

### Phase II: 459.1250 MHz, 12.5 kHz Channel Spacing, Max Power

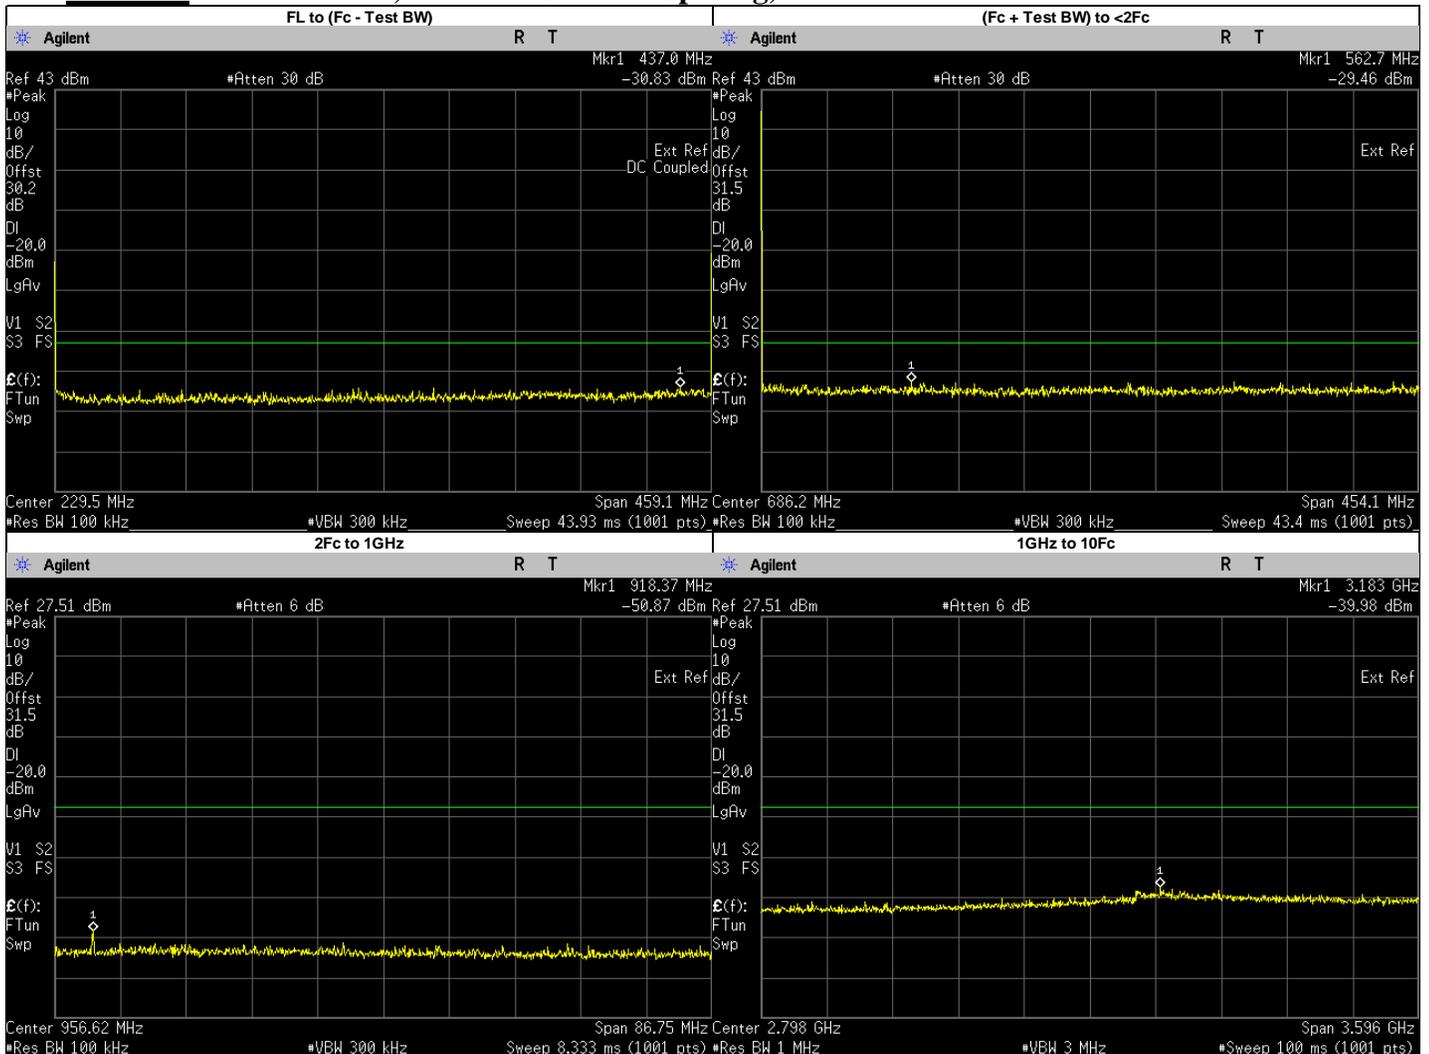


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	437.0000	-30.8300	-20	PASS
(Fc + Test BW) to <2Fc	562.7093	-29.4600	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	918.3682	-50.8700	-20	PASS
	918.2500	-51.1172	-20	PASS
	3182.9240	-39.9800	-20	PASS
	1377.3750	-45.5792	-20	PASS
	1836.5000	-44.9482	-20	PASS
	2295.6250	-44.6523	-20	PASS
	2754.7500	-43.8085	-20	PASS
	3213.8750	-41.9890	-20	PASS
	3673.0000	-42.3671	-20	PASS
4132.1250	-42.7571	-20	PASS	
4591.2500	-42.5680	-20	PASS	

**Phase II: 467.7750 MHz, 12.5 kHz Channel Spacing, Max Power**

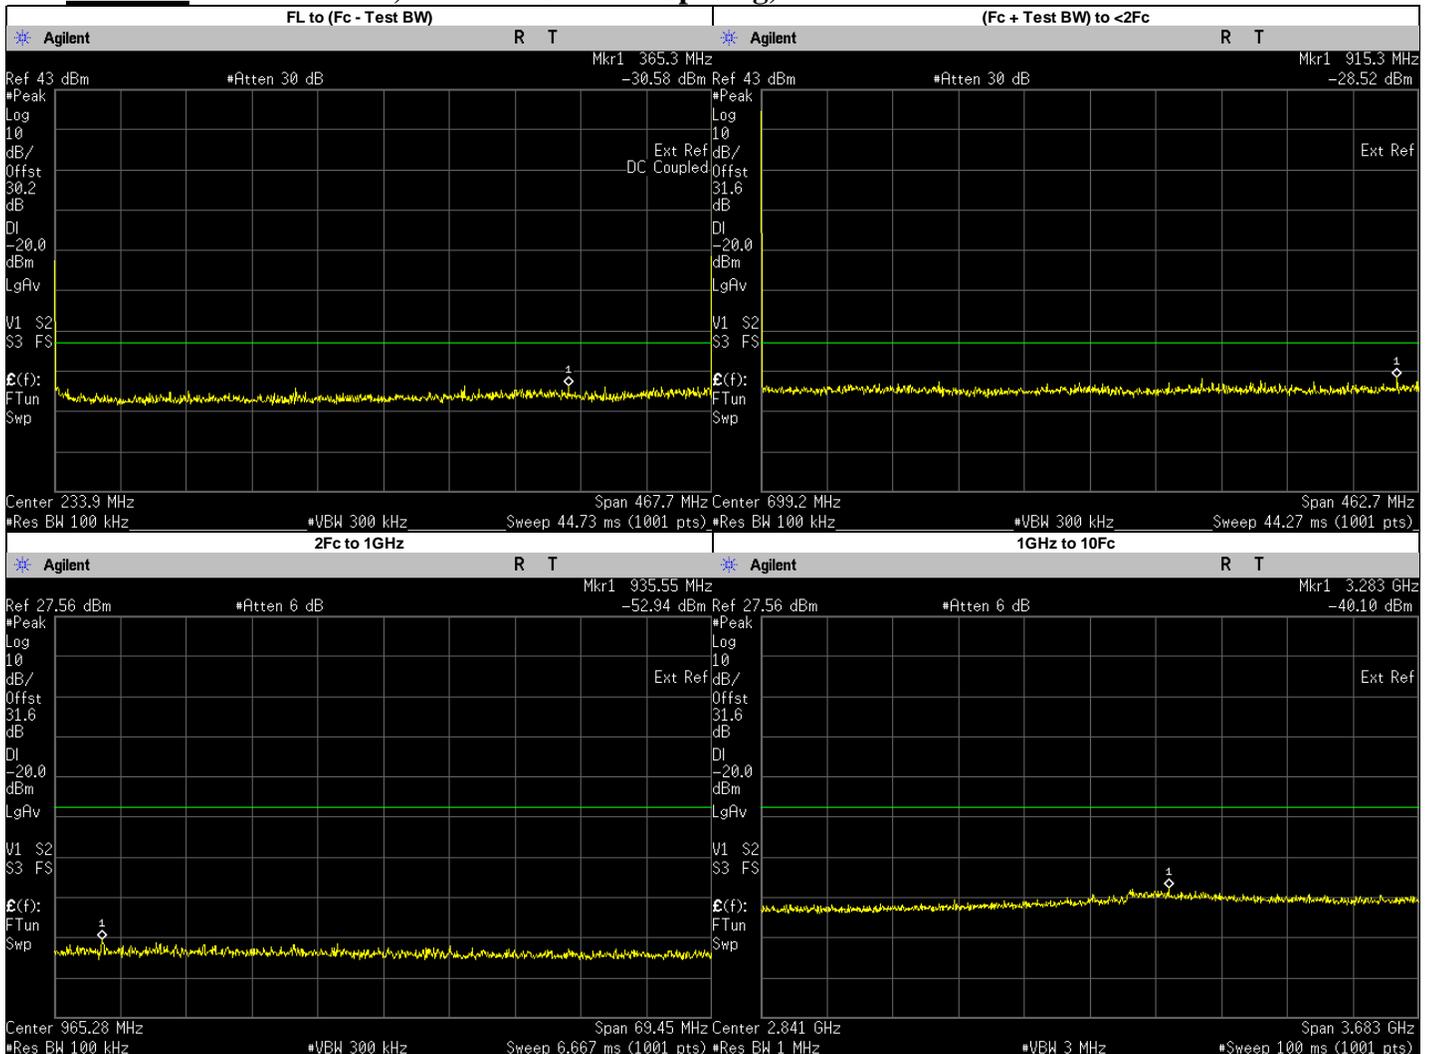


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	365.3000	-30.5780	-20	PASS
(Fc + Test BW) to <2Fc	915.2803	-28.5200	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	935.5500	-52.9482	-20	PASS
	3283.3050	-40.1000	-20	PASS
	1403.3250	-45.2879	-20	PASS
	1871.1000	-44.8655	-20	PASS
	2338.8750	-44.4399	-20	PASS
	2806.6500	-43.6563	-20	PASS
	3274.4250	-42.0098	-20	PASS
	3742.2000	-42.7900	-20	PASS
4209.9750	-43.6655	-20	PASS	
4677.7500	-43.0748	-20	PASS	

**Phase II: 482.0125 MHz, 12.5 kHz Channel Spacing, Max Power**

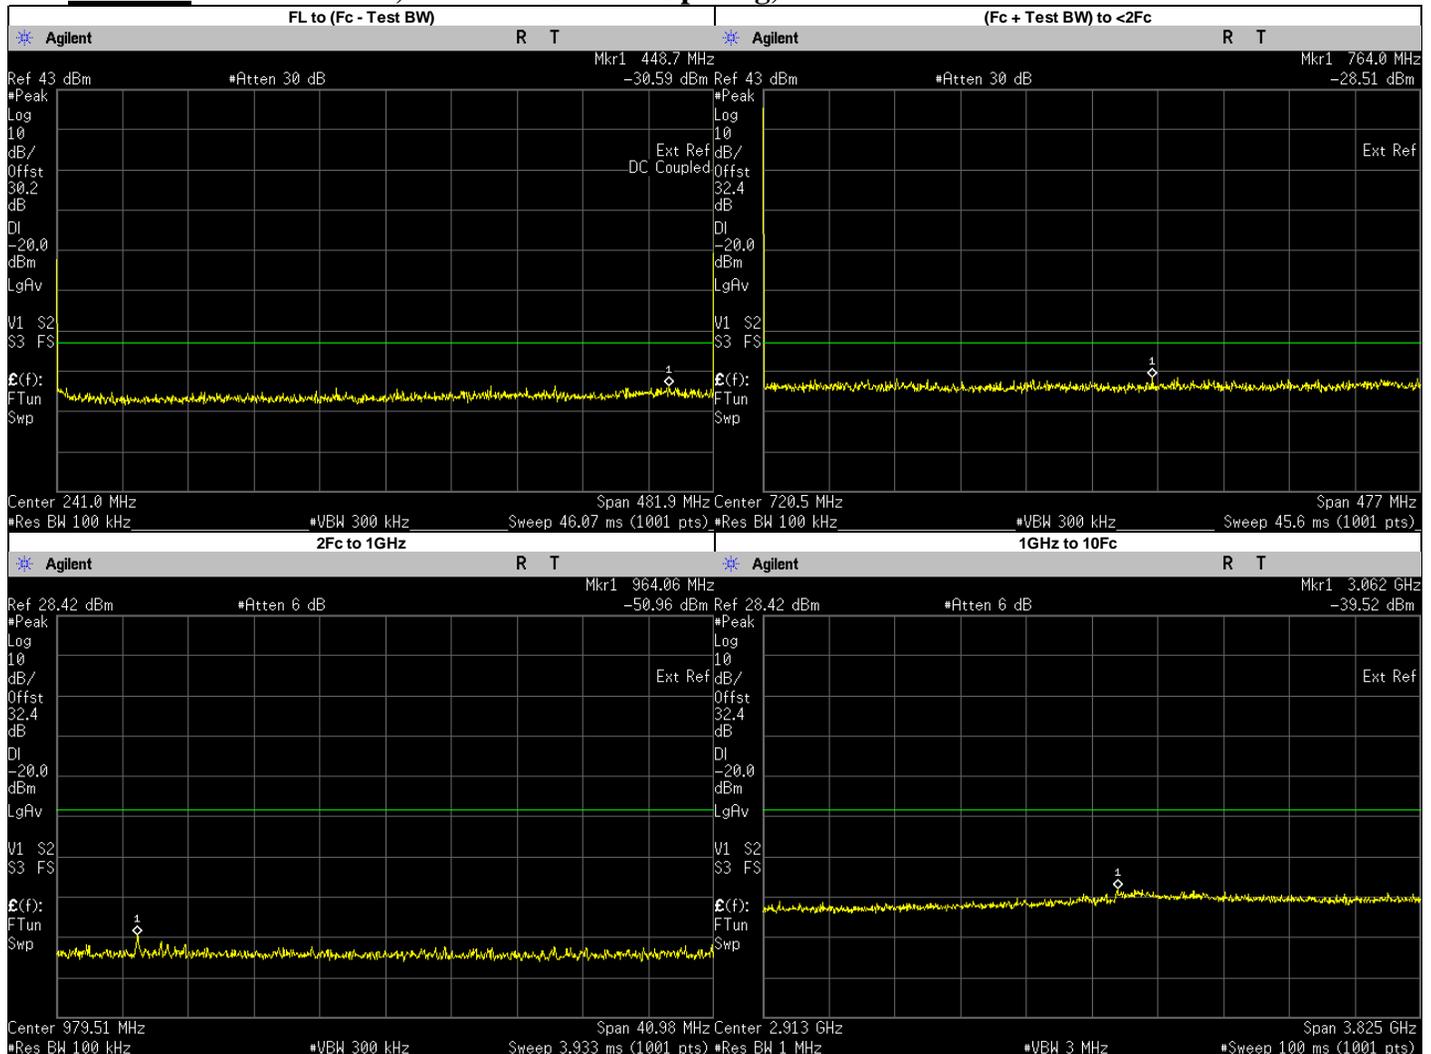


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	448.7000	-30.5920	-20	PASS
(Fc + Test BW) to <2Fc	763.9501	-28.5100	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	964.0649	-50.9600	-20	PASS
	964.0250	-51.9822	-20	PASS
	3061.7420	-39.5200	-20	PASS
	1446.0370	-44.5583	-20	PASS
	1928.0500	-44.0990	-20	PASS
	2410.0620	-43.6128	-20	PASS
	2892.0750	-42.4871	-20	PASS
	3374.0880	-41.2827	-20	PASS
	3856.1000	-41.7881	-20	PASS
	4338.1130	-42.2398	-20	PASS
4820.1250	-42.4155	-20	PASS	

### Phase II: 511.9875 MHz, 12.5 kHz Channel Spacing, Low Power

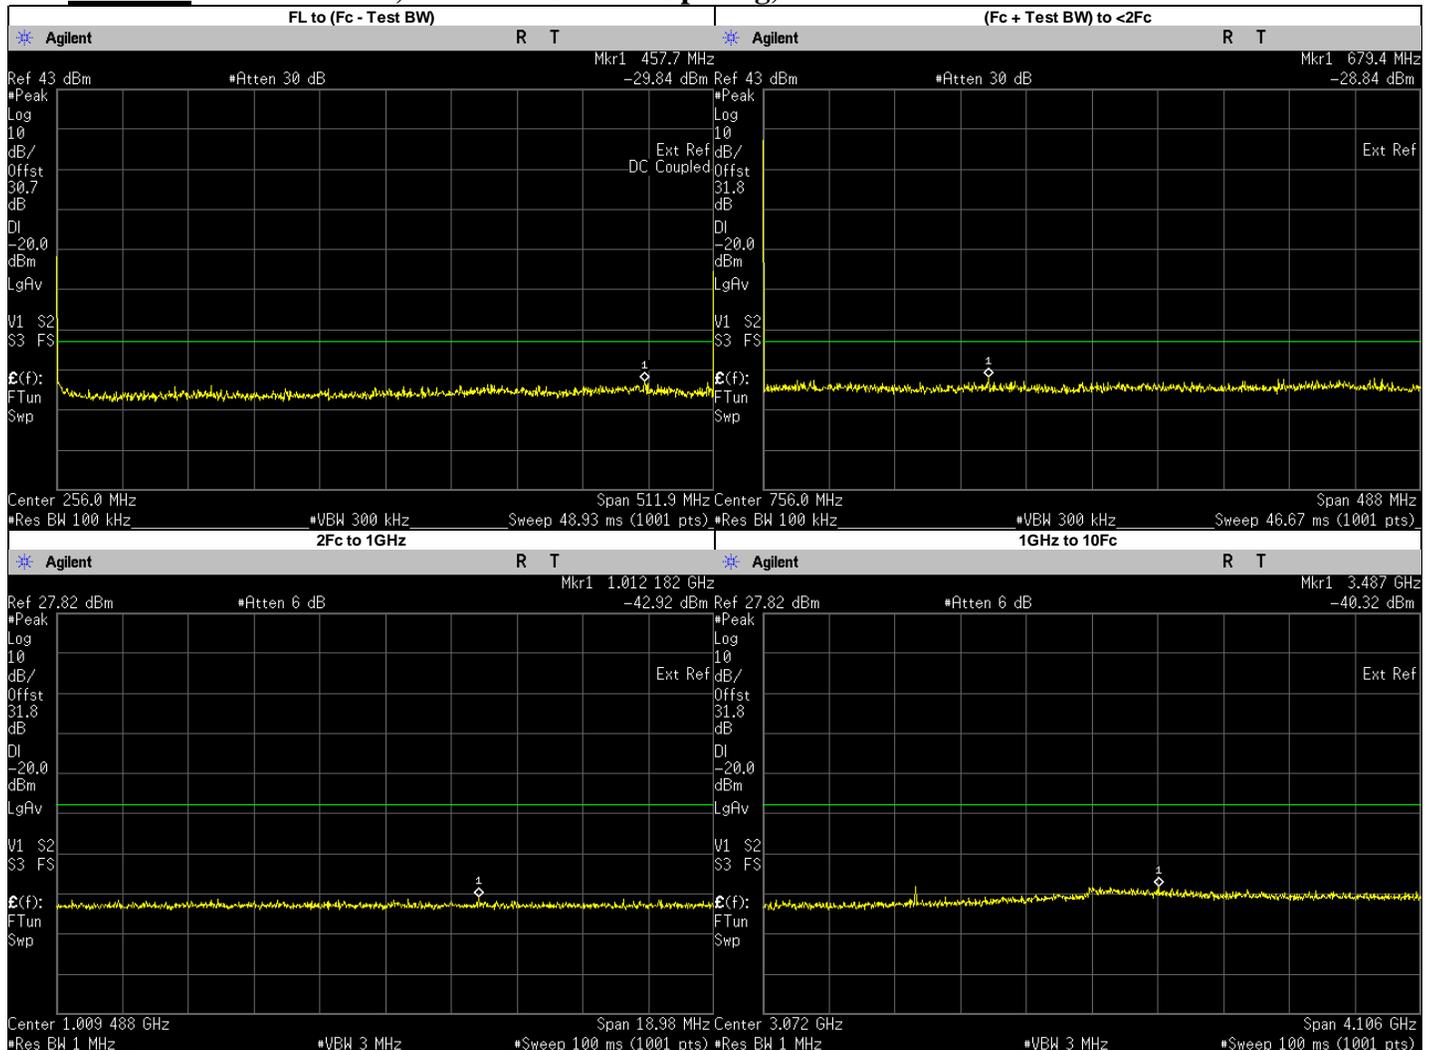


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	457.7000	-29.8430	-20	PASS
(Fc + Test BW) to <2Fc	679.4131	-28.8400	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1012.1820	-42.9190	-20	PASS
	3486.6210	-40.3200	-20	PASS
	1023.9750	-45.3520	-20	PASS
	1535.9630	-45.3872	-20	PASS
	2047.9500	-44.7422	-20	PASS
	2559.9370	-43.4789	-20	PASS
	3071.9250	-41.5730	-20	PASS
	3583.9120	-42.2926	-20	PASS
	4095.9000	-42.6583	-20	PASS
4607.8870	-42.8459	-20	PASS	
5119.8750	-42.6522	-20	PASS	

### Phase II: 511.9875 MHz, 12.5 kHz Channel Spacing, Max Power

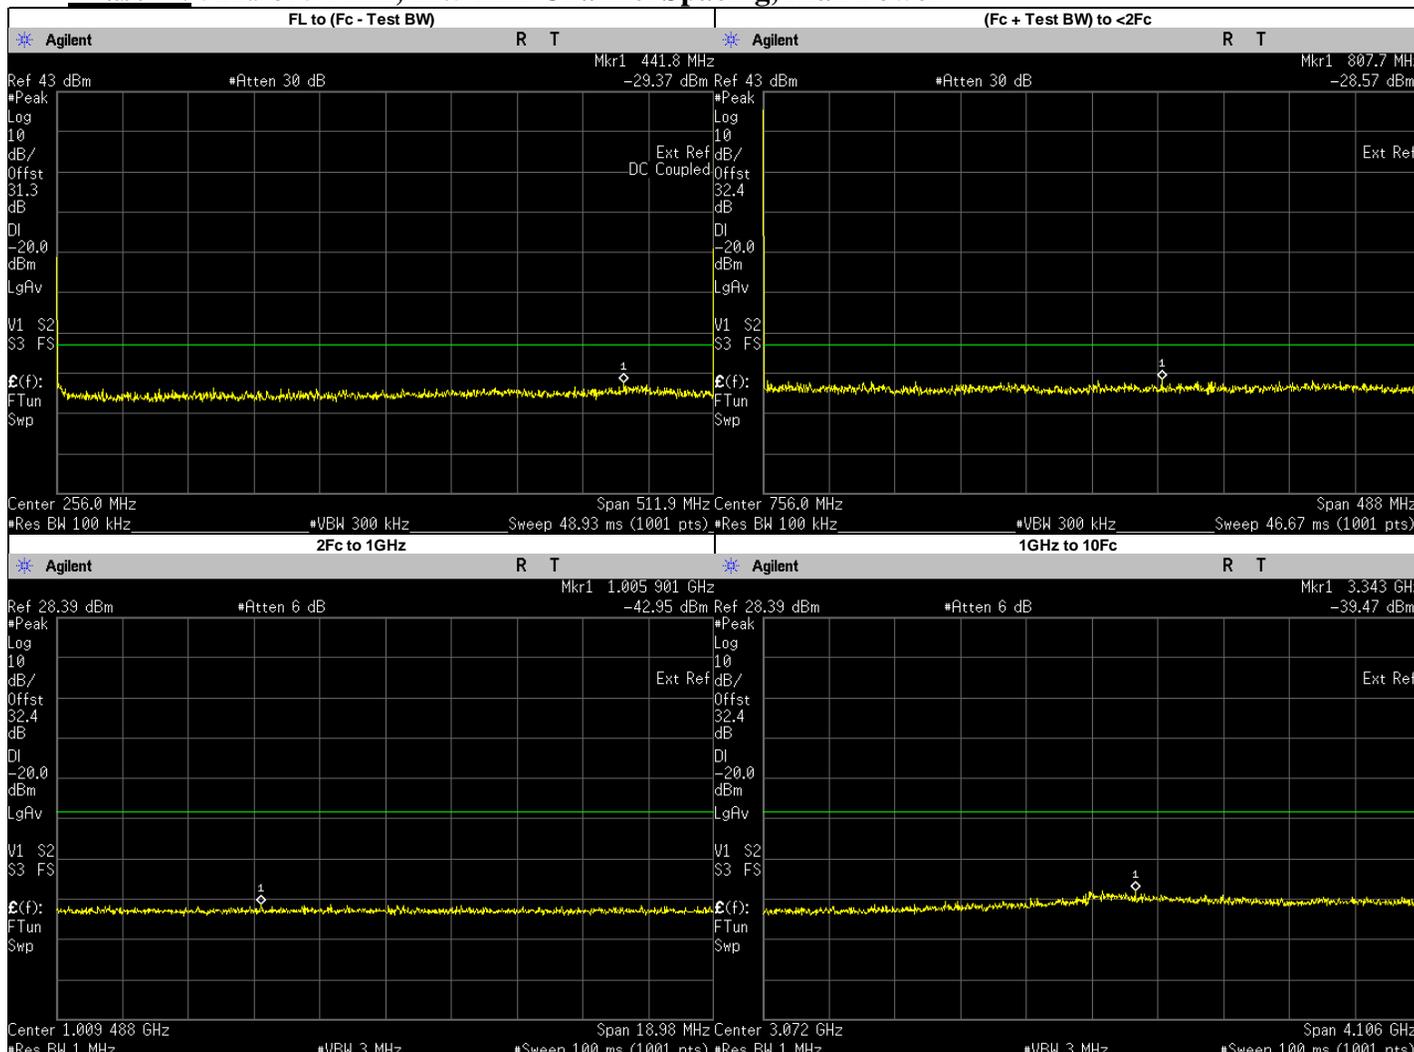

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	441.8000	-29.3670	-20	PASS
(Fc + Test BW) to <2Fc	807.7455	-28.5700	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1005.9010	-42.9500	-20	PASS
	3342.9140	-39.4700	-20	PASS
	1023.9750	-44.8474	-20	PASS
	1535.9630	-44.1543	-20	PASS
	2047.9500	-43.7449	-20	PASS
	2559.9370	-42.8536	-20	PASS
	3071.9250	-40.5060	-20	PASS
	3583.9120	-41.8830	-20	PASS
	4095.9000	-42.0613	-20	PASS
4607.8870	-41.7931	-20	PASS	
5119.8750	-42.8197	-20	PASS	

**Phase II: 519.9875 MHz, 12.5 kHz Channel Spacing, Max Power**  
**Not for FCC review**

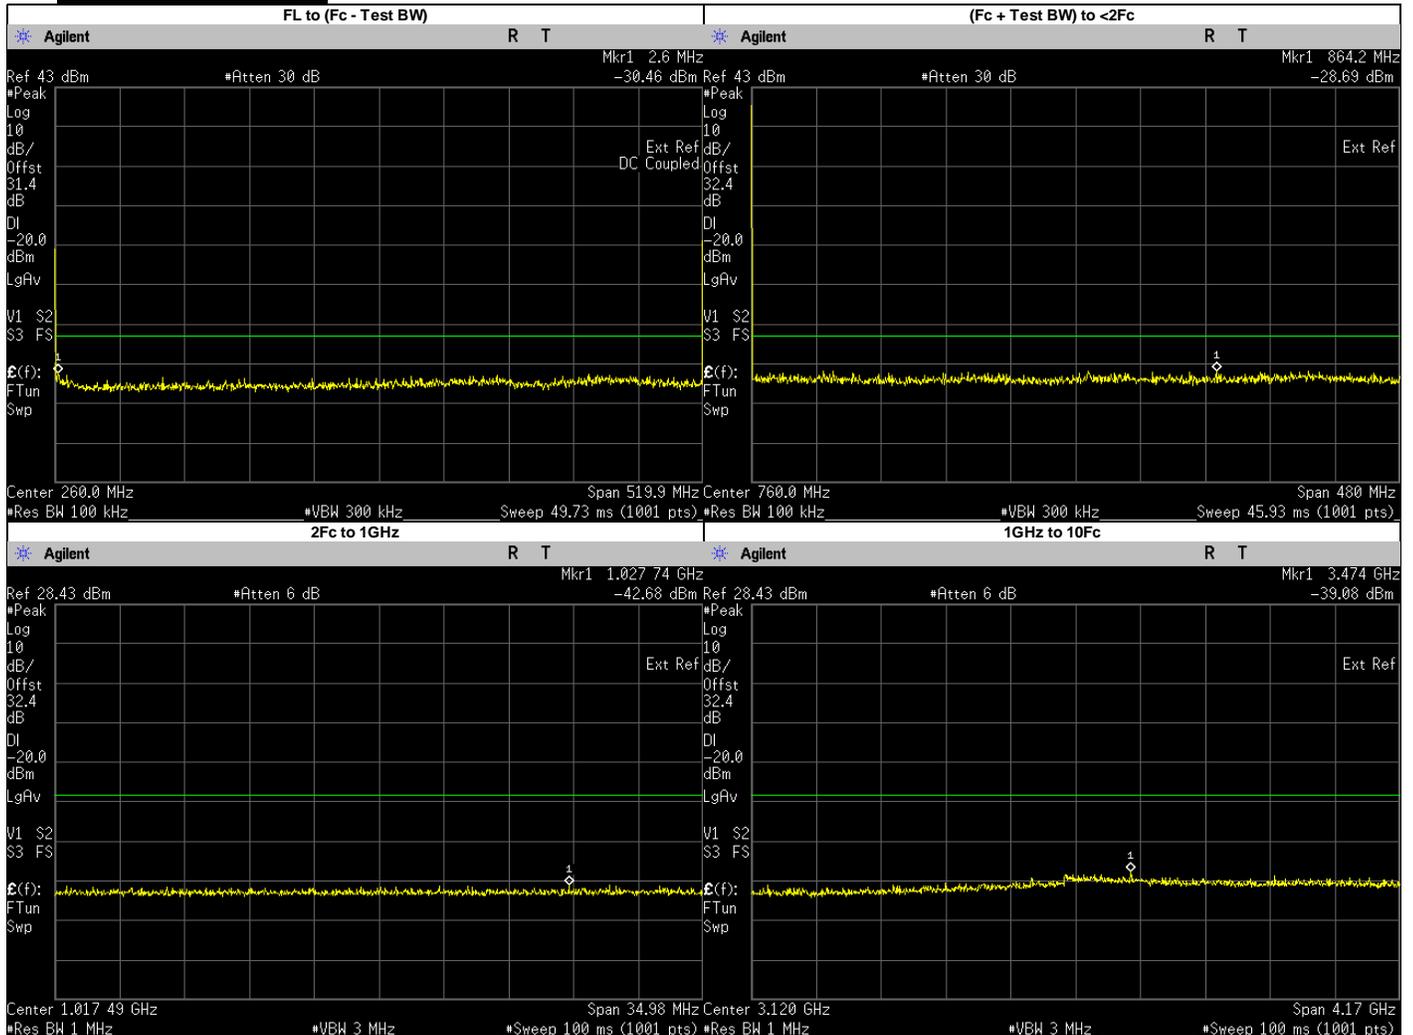

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.6000	-30.4600	-20	PASS
(Fc + Test BW) to <2Fc	864.1725	-28.6900	-20	PASS
2Fc to 1GHz 1GHz to 10Fc	1027.7350	-42.6800	-20	PASS
	3474.3670	-39.0800	-20	PASS
	1039.9750	-44.1544	-20	PASS
	1559.9630	-44.6806	-20	PASS
	2079.9500	-43.7364	-20	PASS
	2599.9370	-42.7951	-20	PASS
	3119.9250	-40.9910	-20	PASS
	3639.9120	-42.0032	-20	PASS
	4159.9000	-42.1432	-20	PASS
	4679.8870	-41.4105	-20	PASS
5199.8750	-42.0610	-20	PASS	

**6.9.4. Test Limit**


Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	Not Applicable	50 + log <sub>10</sub> (P) (-20 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)
25kHz		Not Applicable		43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log <sub>10</sub> (P) (-13 dBm)	Not Applicable	50 + log <sub>10</sub> (P) (-20 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)
25kHz	Not Applicable	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)

### 6.10. Radiated Spurious Emission

#### 6.10.1. Test Setup

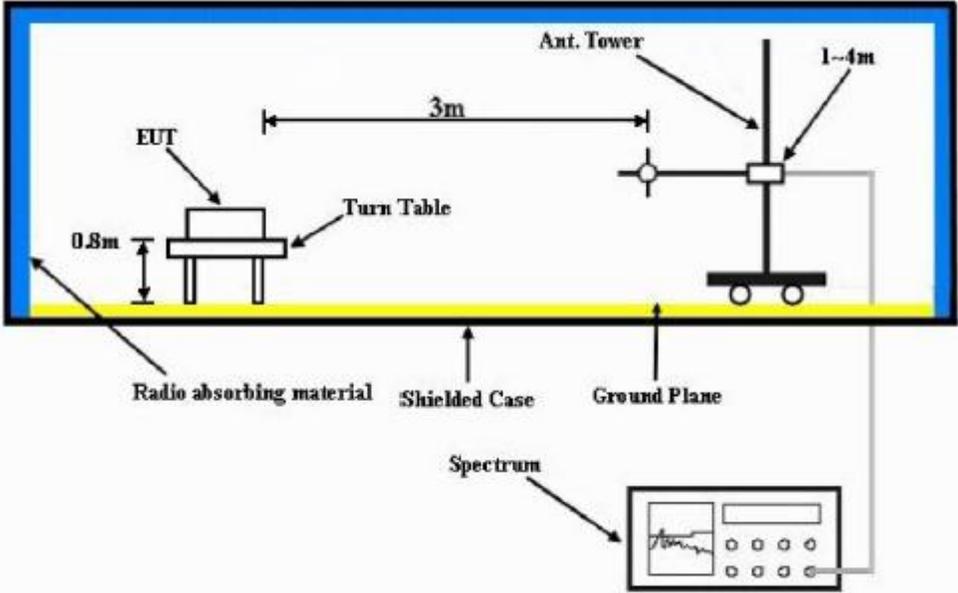

- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for  $F_c < 1\text{GHz}$ ) or 1.5m height (for  $F_c > 1\text{GHz}$ ) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.



**Not for FCC review**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Analog**

**406.200000 MHz**

**25 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-75.7567 **	-76.1463 **
1218.6000	-13.0000	-59.6621 **	-61.1546 **
1624.8000	-13.0000	-58.8547 **	-59.1346 **
2031.0000	-13.0000	-54.6395 **	-54.9745 **
2437.2000	-13.0000	-53.0680 **	-54.5465 **
2843.4000	-13.0000	-52.9947 **	-53.8524 **
3249.6000	-13.0000	-51.2711 **	-50.7553 **
3655.8000	-13.0000	-52.1527 **	-50.5321 **
4062.0000	-13.0000	-49.9833 **	-49.7488 **

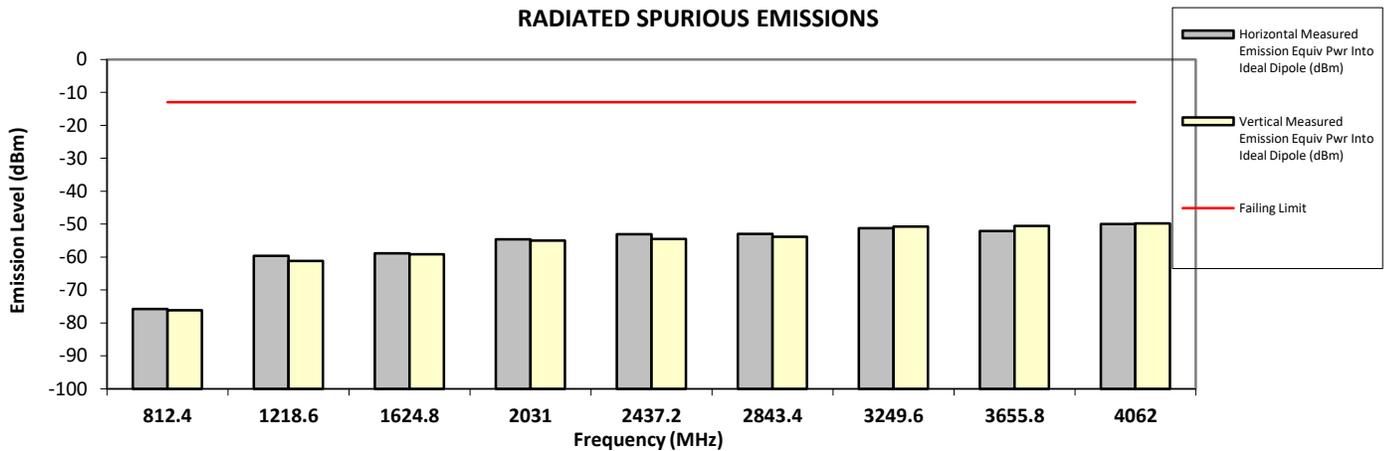

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

**For Part 74**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**

**Test Mode: TX Analog**


**450.025000 MHz**

**25 kHz**

**1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-75.3110 **	-75.9714 **
1350.0750	-13.0000	-58.5400 *	-59.5400 *
1800.1000	-13.0000	-57.5050 **	-57.6218 **
2250.1250	-13.0000	-55.5605 **	-55.2010 **
2700.1500	-13.0000	-53.3225 **	-52.3057 **
3150.1750	-13.0000	-49.9877 **	-50.7077 **
3600.2000	-13.0000	-51.1331 **	-50.7504 **
4050.2250	-13.0000	-49.6063 **	-48.7565 **
4500.2500	-13.0000	-48.7350 **	-49.2667 **

**RADIATED SPURIOUS EMISSIONS**

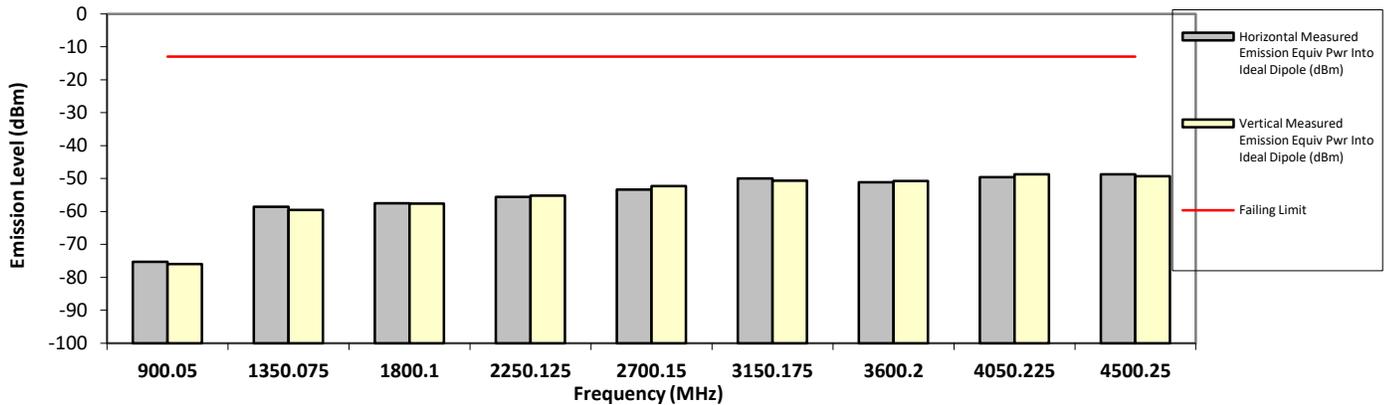

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

**For Part 74**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Analog**

**450.025000 MHz**

**25 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-76.1330 **	-73.1342 **
1350.0750	-13.0000	-59.3683 **	-59.9880 **
1800.1000	-13.0000	-57.2505 **	-57.4194 **
2250.1250	-13.0000	-55.0674 **	-55.8047 **
2700.1500	-13.0000	-51.1498 **	-53.3333 **
3150.1750	-13.0000	-51.0522 **	-49.6955 **
3600.2000	-13.0000	-51.0868 **	-50.5313 **
4050.2250	-13.0000	-48.6092 **	-48.8248 **
4500.2500	-13.0000	-48.2477 **	-48.6349 **

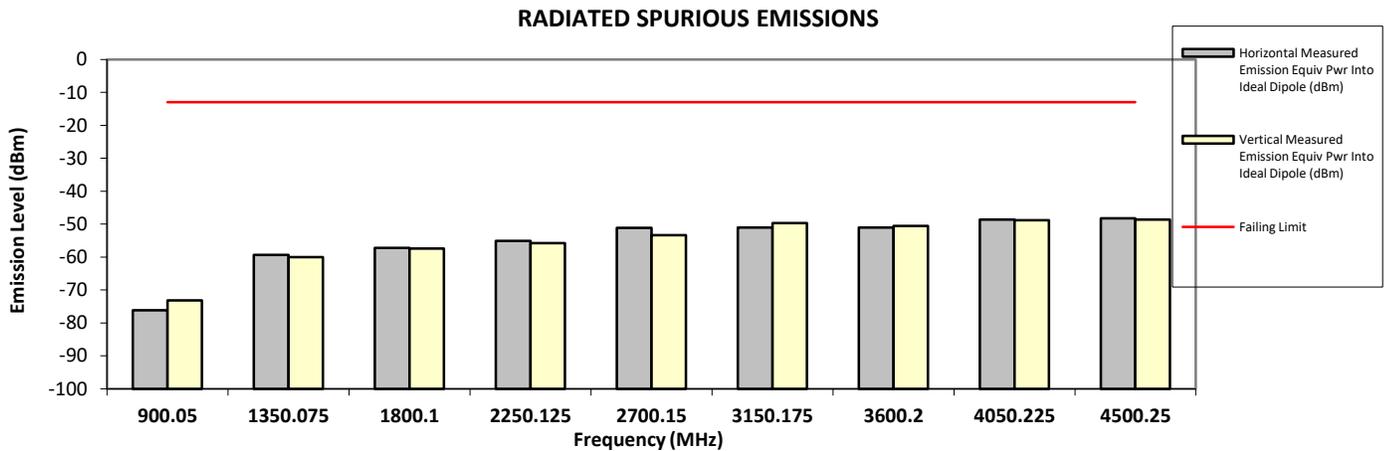

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

**For Part 22**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Analog**

**459.125000 MHz**

**25 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-75.0153 **	-76.0291 **
1377.3750	-13.0000	-59.5115 **	-59.6439 **
1836.5000	-13.0000	-57.3562 **	-57.5886 **
2295.6250	-13.0000	-55.0455 **	-54.3356 **
2754.7500	-13.0000	-54.5226 **	-53.2450 **
3213.8750	-13.0000	-50.6897 **	-50.1127 **
3673.0000	-13.0000	-51.8205 **	-51.6730 **
4132.1250	-13.0000	-48.6615 **	-48.5472 **
4591.2500	-13.0000	-47.6436 **	-48.2852 **

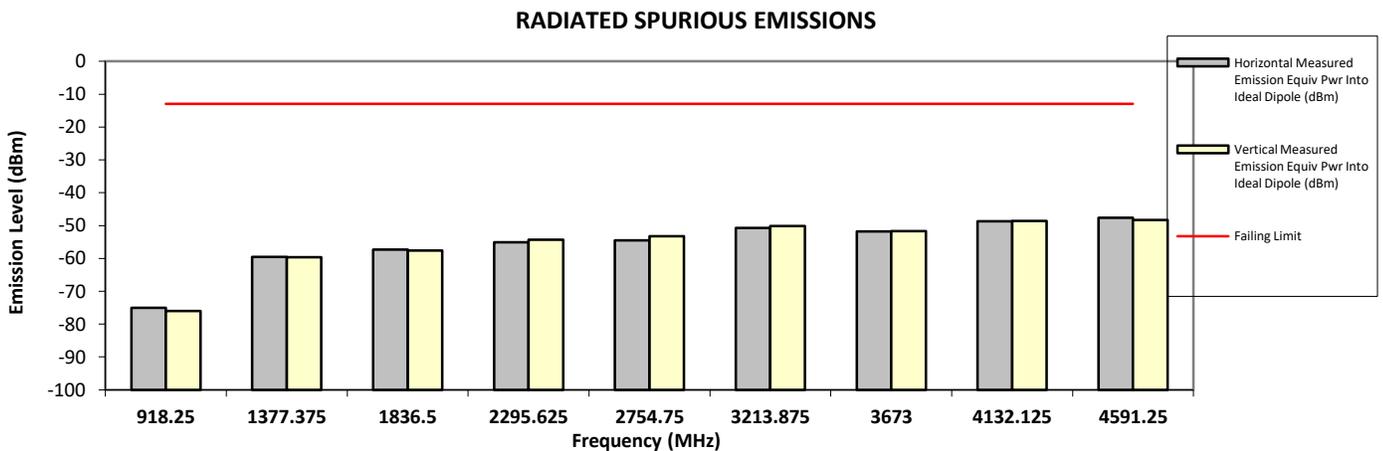

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

**For Part 80**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Analog**

**467.775000 MHz**

**25 kHz**

**1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-75.5829 **	-74.5449 **
1403.3250	-13.0000	-60.4389 **	-59.9846 **
1871.1000	-13.0000	-56.3074 **	-57.2909 **
2338.8750	-13.0000	-54.9107 **	-54.5407 **
2806.6500	-13.0000	-54.0288 **	-53.7449 **
3274.4250	-13.0000	-50.7035 **	-50.1014 **
3742.2000	-13.0000	-49.9799 **	-50.2537 **
4209.9750	-13.0000	-48.2675 **	-47.9449 **
4677.7500	-13.0000	-46.5372 **	-48.3193 **

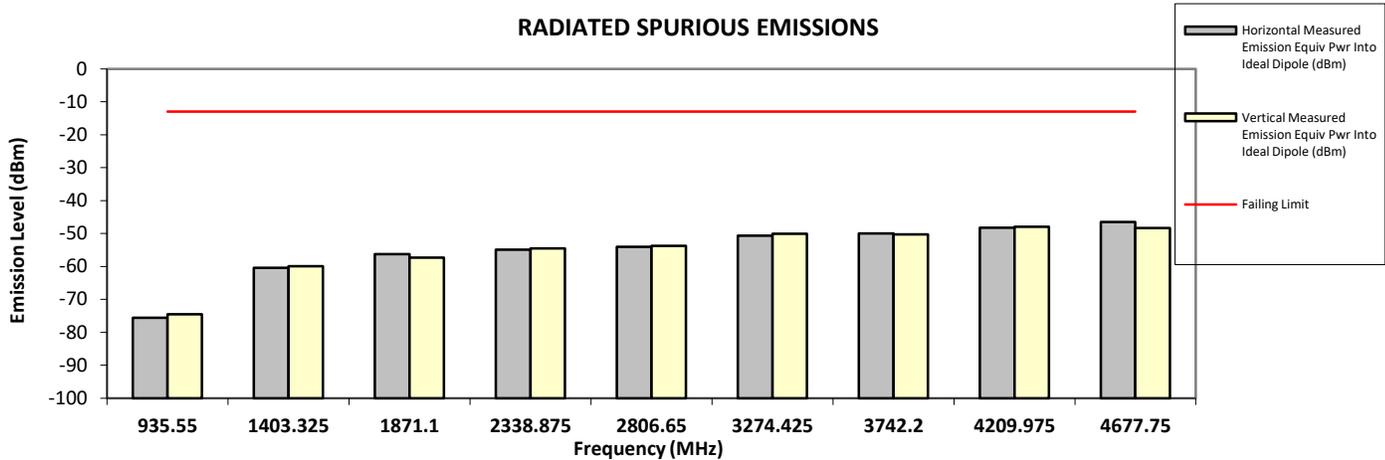

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

**For Part 80**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**

**Test Mode: TX Analog**


**467.775000 MHz**

**25 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-74.5286 **	-74.6638 **
1403.3250	-13.0000	-61.1592 **	-59.6109 **
1871.1000	-13.0000	-57.9267 **	-58.2132 **
2338.8750	-13.0000	-53.7744 **	-55.2196 **
2806.6500	-13.0000	-52.5498 **	-52.7992 **
3274.4250	-13.0000	-51.3169 **	-51.1334 **
3742.2000	-13.0000	-50.8149 **	-50.6240 **
4209.9750	-13.0000	-48.2616 **	-48.5454 **
4677.7500	-13.0000	-47.8042 **	-47.2631 **

**RADIATED SPURIOUS EMISSIONS**

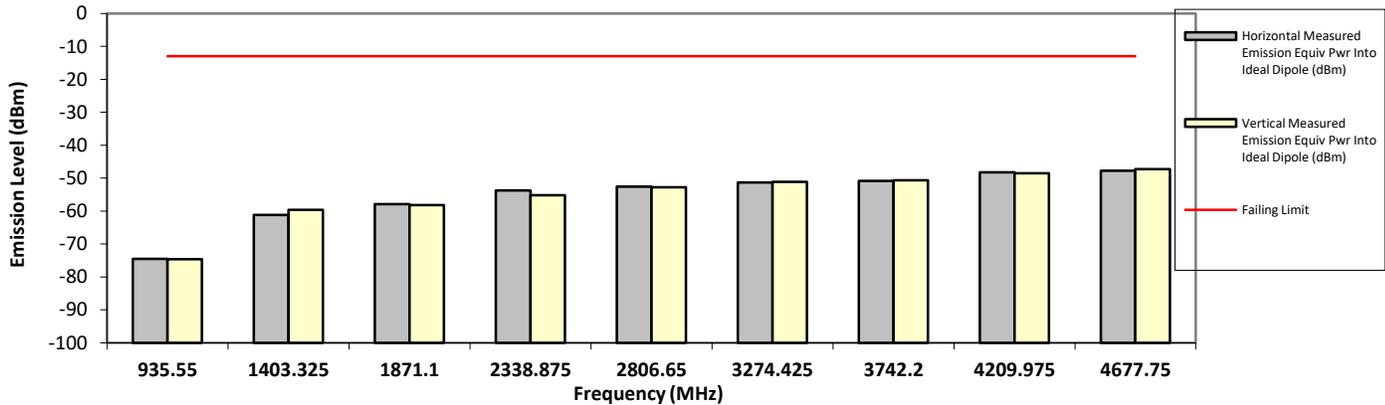

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Analog


482.012500 MHz

25 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into Ideal Dipole (dBm)
964.0250	-13.0000	-74.9950 **	-74.9426 **
1446.0375	-13.0000	-59.6673 **	-59.4552 **
1928.0500	-13.0000	-56.2672 **	-56.3538 **
2410.0625	-13.0000	-54.6604 **	-55.2184 **
2892.0750	-13.0000	-52.9589 **	-53.3368 **
3374.0875	-13.0000	-50.7097 **	-50.8480 **
3856.1000	-13.0000	-50.0049 **	-48.8614 **
4338.1125	-13.0000	-49.2371 **	-49.3767 **
4820.1250	-13.0000	-45.0238 **	-46.6194 **

RADIATED SPURIOUS EMISSIONS

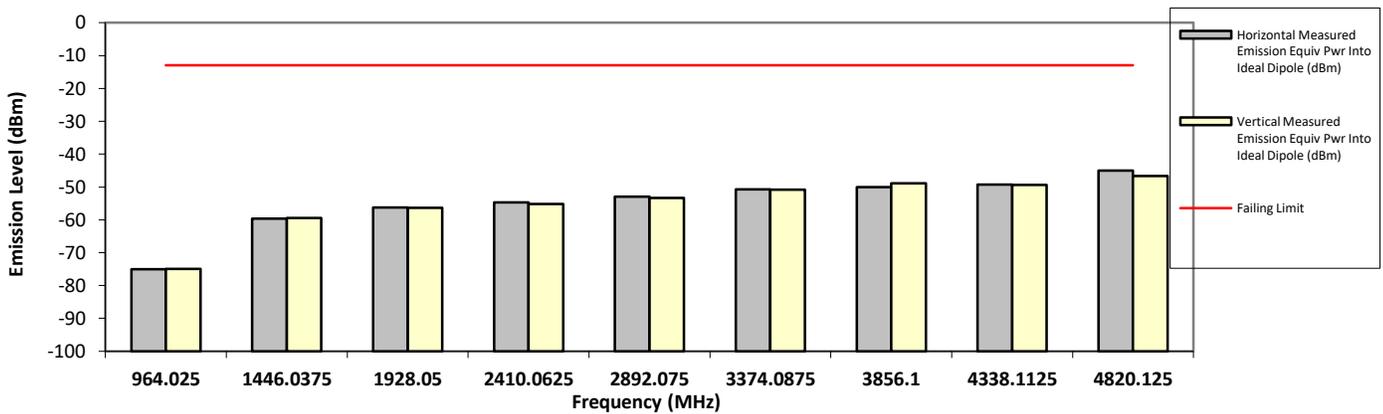

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Analog


511.987500 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-55.1100 *	-56.6600 *
1535.9625	-13.0000	-58.5872 **	-58.9705 **
2047.9500	-13.0000	-54.1285 **	-54.6103 **
2559.9375	-13.0000	-52.3336 **	-54.3372 **
3071.9250	-13.0000	-52.0826 **	-51.5564 **
3583.9125	-13.0000	-51.8255 **	-50.8638 **
4095.9000	-13.0000	-49.3657 **	-49.5907 **
4607.8875	-13.0000	-48.4851 **	-47.7540 **
5119.8750	-13.0000	-46.3482 **	-45.3213 **

RADIATED SPURIOUS EMISSIONS

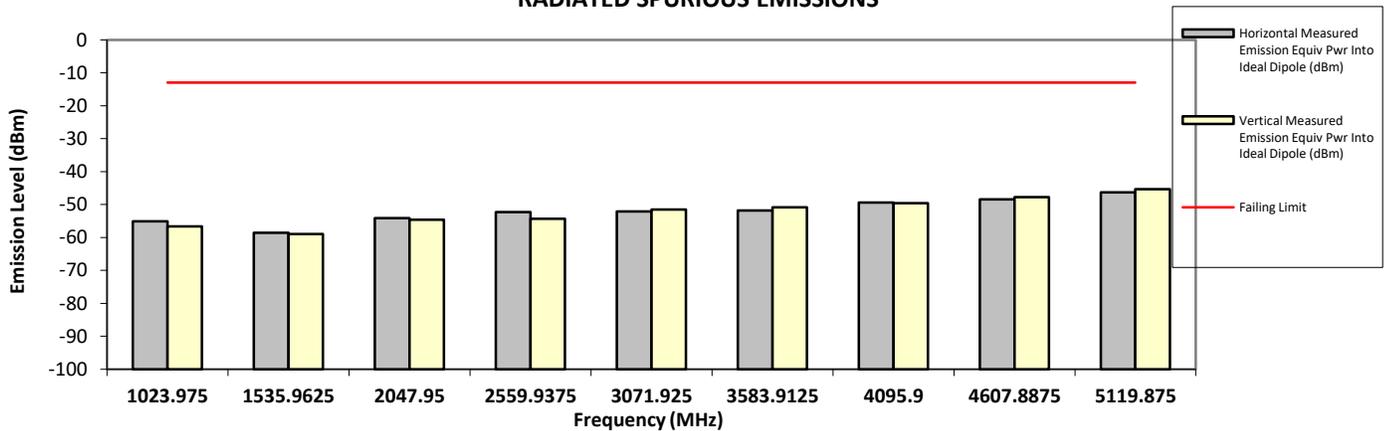

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Analog


511.987500 MHz

25 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1023.9750	-13.0000	-53.9500 *	-55.1100 *
1535.9625	-13.0000	-59.5438 **	-58.9398 **
2047.9500	-13.0000	-54.5420 **	-54.6862 **
2559.9375	-13.0000	-54.1025 **	-53.7160 **
3071.9250	-13.0000	-51.3739 **	-51.3194 **
3583.9125	-13.0000	-50.5508 **	-50.8082 **
4095.9000	-13.0000	-48.8448 **	-48.2121 **
4607.8875	-13.0000	-48.5375 **	-46.9519 **
5119.8750	-13.0000	-46.0492 **	-45.9372 **

RADIATED SPURIOUS EMISSIONS

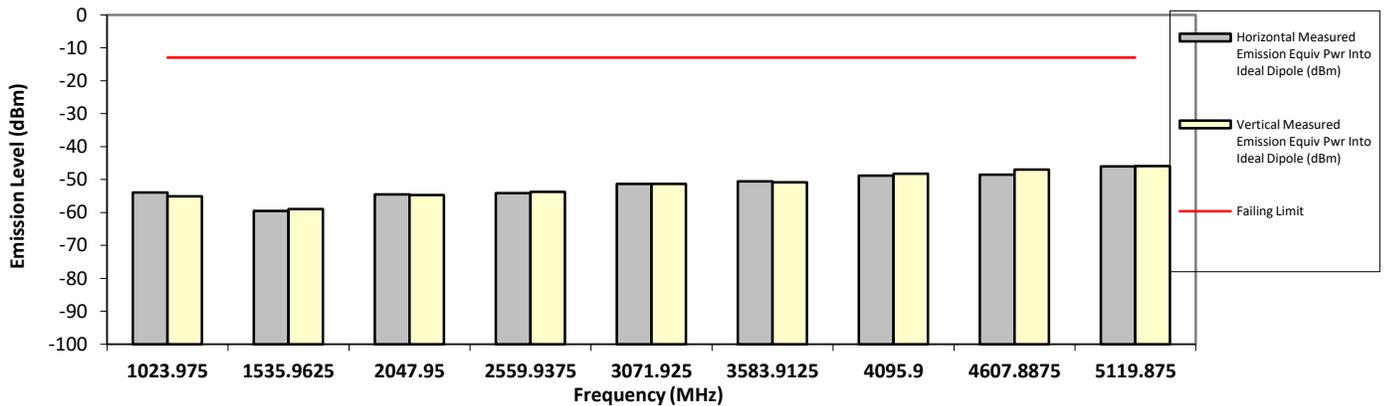

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

**Not for FCC review**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Analog**

**519.987500 MHz**

**25 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1039.9750	-13.0000	-56.7000 *	-56.1000 *
1559.9625	-13.0000	-59.7916 **	-58.1433 **
2079.9500	-13.0000	-55.8067 **	-55.6380 **
2599.9375	-13.0000	-52.5893 **	-54.2846 **
3119.9250	-13.0000	-51.8584 **	-51.4379 **
3639.9125	-13.0000	-50.5920 **	-51.2808 **
4159.9000	-13.0000	-49.1794 **	-48.5400 **
4679.8875	-13.0000	-45.9697 **	-46.9519 **
5199.8750	-13.0000	-45.4394 **	-45.2944 **

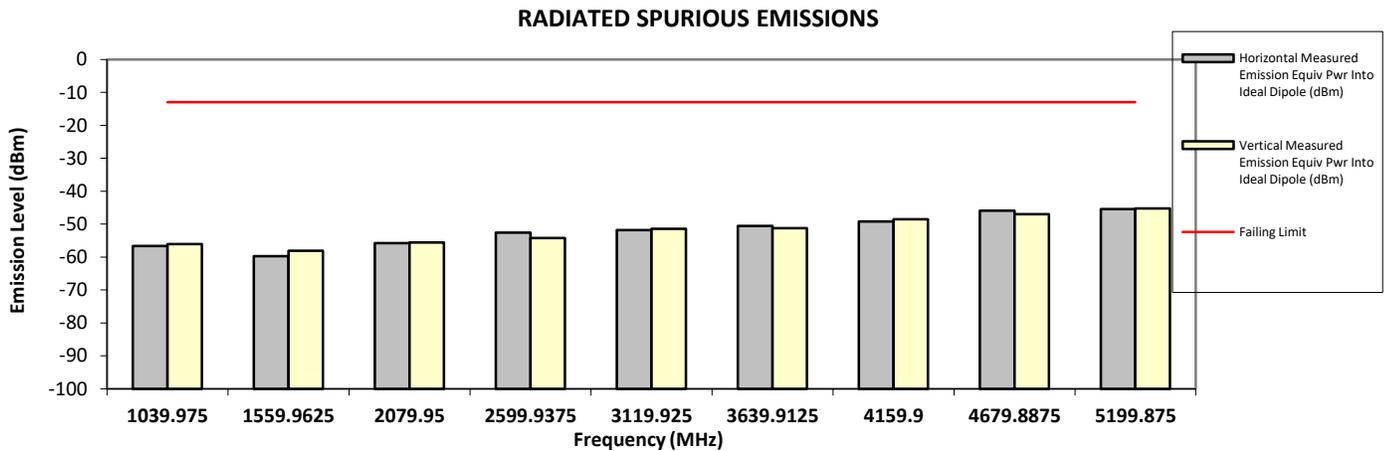

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

**6.10.3. Test Result (Digital)**

Not for FCC review

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital


380.012500 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-76.7144 **	-75.9497 **
1140.0375	-20.0000	-53.6800 *	-52.3000 *
1520.0500	-20.0000	-60.0574 **	-59.6316 **
1900.0625	-20.0000	-56.6399 **	-56.9582 **
2280.0750	-20.0000	-55.8342 **	-55.0839 **
2660.0875	-20.0000	-52.8291 **	-52.4592 **
3040.1000	-20.0000	-50.9302 **	-52.9550 **
3420.1125	-20.0000	-50.7514 **	-49.3715 **
3800.1250	-20.0000	-50.1437 **	-51.1835 **

**RADIATED SPURIOUS EMISSIONS**

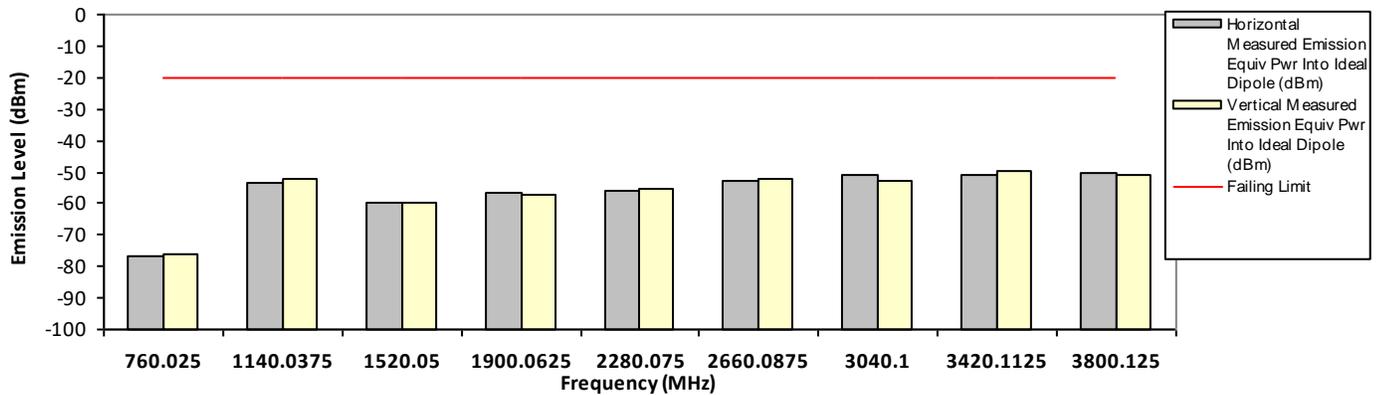

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital

406.200000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-76.9423 **	-76.0907 **
1218.6000	-20.0000	-60.3686 **	-60.5623 **
1624.8000	-20.0000	-58.4742 **	-59.4475 **
2031.0000	-20.0000	-55.3461 **	-53.8127 **
2437.2000	-20.0000	-54.5909 **	-54.0896 **
2843.4000	-20.0000	-53.8336 **	-53.1550 **
3249.6000	-20.0000	-51.0084 **	-50.9970 **
3655.8000	-20.0000	-50.4905 **	-51.2825 **
4062.0000	-20.0000	-49.5870 **	-49.8254 **

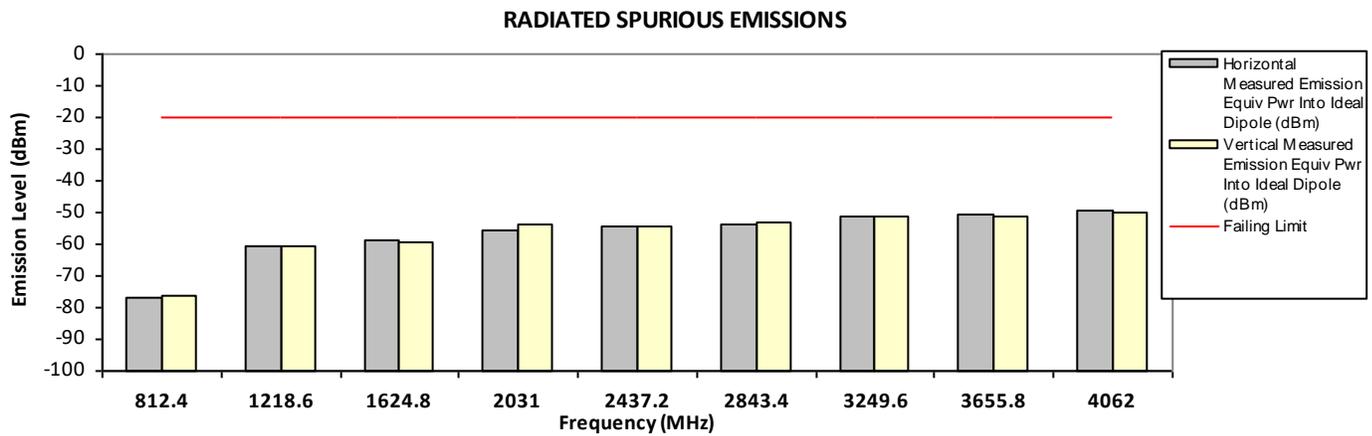

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital

450.025000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-73.9669 **	-74.4751 **
1350.0750	-20.0000	-59.8785 **	-59.7908 **
1800.1000	-20.0000	-58.0908 **	-58.7333 **
2250.1250	-20.0000	-55.0575 **	-55.6537 **
2700.1500	-20.0000	-53.8284 **	-53.6489 **
3150.1750	-20.0000	-51.6175 **	-51.5337 **
3600.2000	-20.0000	-50.5986 **	-50.1349 **
4050.2250	-20.0000	-49.7968 **	-49.6649 **
4500.2500	-20.0000	-48.1323 **	-47.1418 **

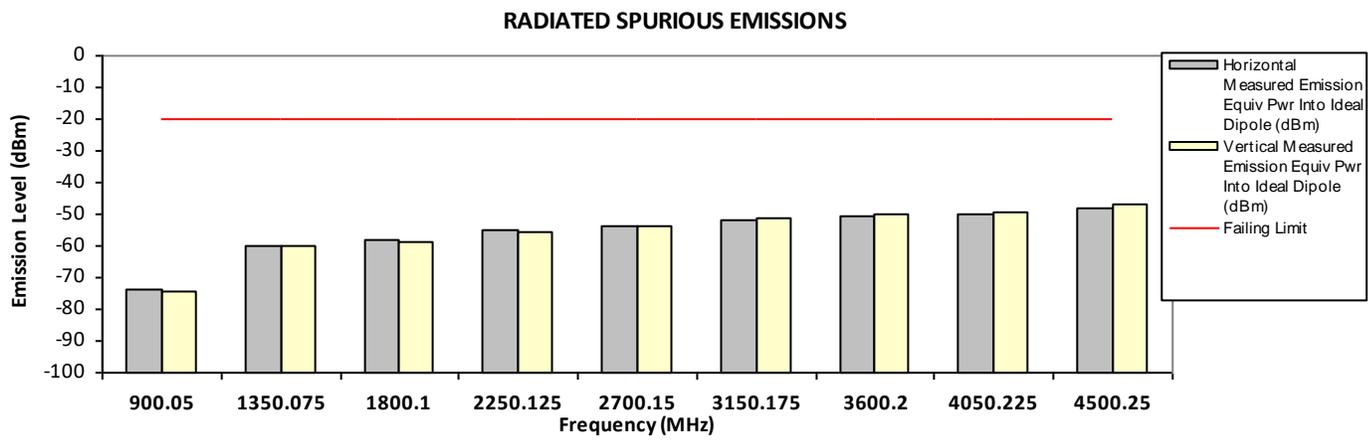

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.  
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.  
 \*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital

450.025000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-74.0231 **	-76.2069 **
1350.0750	-20.0000	-59.8277 **	-59.3837 **
1800.1000	-20.0000	-57.6529 **	-57.4515 **
2250.1250	-20.0000	-55.2806 **	-54.5171 **
2700.1500	-20.0000	-53.6971 **	-52.2167 **
3150.1750	-20.0000	-51.4265 **	-50.9825 **
3600.2000	-20.0000	-50.7588 **	-50.2885 **
4050.2250	-20.0000	-49.3278 **	-48.7908 **
4500.2500	-20.0000	-48.9360 **	-49.0382 **

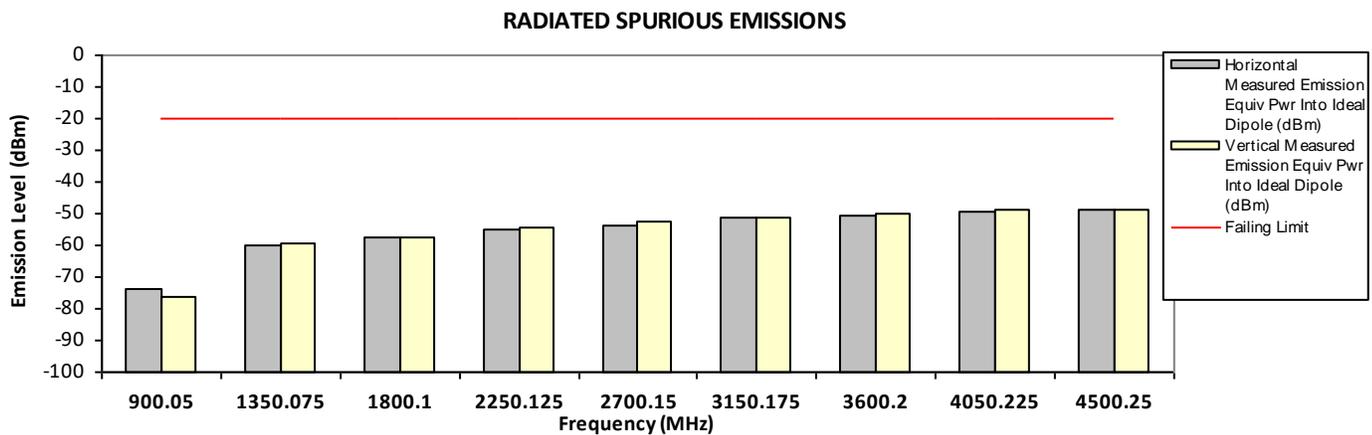

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.  
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.  
 \*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital

459.125000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-76.1765 **	-76.4692 **
1377.3750	-20.0000	-60.2890 **	-59.8144 **
1836.5000	-20.0000	-56.5640 **	-56.6255 **
2295.6250	-20.0000	-55.7387 **	-54.7666 **
2754.7500	-20.0000	-52.9382 **	-52.2676 **
3213.8750	-20.0000	-50.7894 **	-49.4243 **
3673.0000	-20.0000	-50.8293 **	-51.0571 **
4132.1250	-20.0000	-49.1686 **	-47.6935 **
4591.2500	-20.0000	-48.5765 **	-47.1296 **

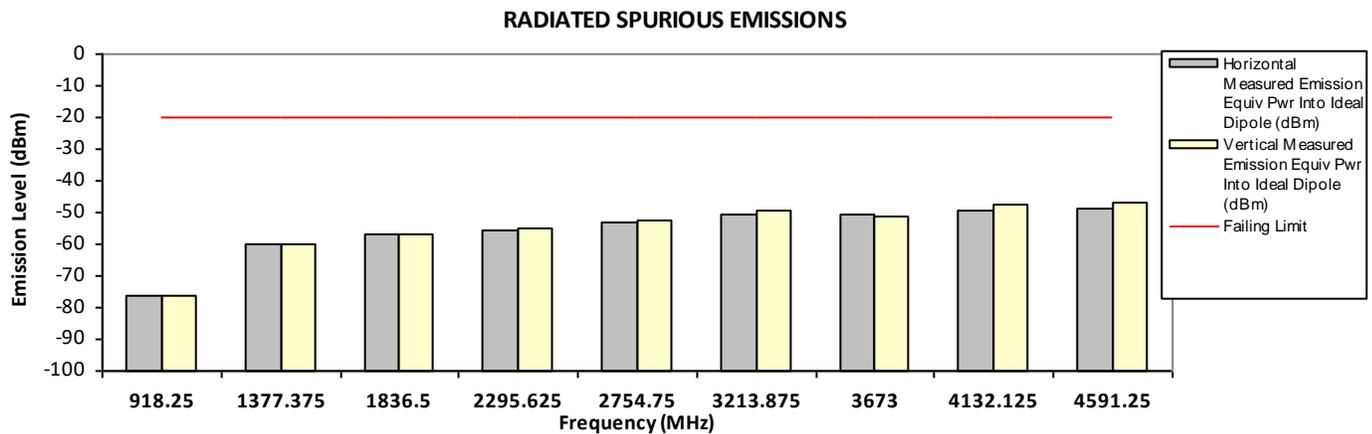

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital


467.775000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-75.9435 **	-74.8909 **
1403.3250	-20.0000	-60.6264 **	-59.5652 **
1871.1000	-20.0000	-57.1062 **	-57.4514 **
2338.8750	-20.0000	-55.1952 **	-54.4705 **
2806.6500	-20.0000	-52.3065 **	-53.7427 **
3274.4250	-20.0000	-51.0181 **	-50.7802 **
3742.2000	-20.0000	-50.4666 **	-51.3907 **
4209.9750	-20.0000	-48.5497 **	-49.1094 **
4677.7500	-20.0000	-47.1751 **	-46.9697 **

RADIATED SPURIOUS EMISSIONS

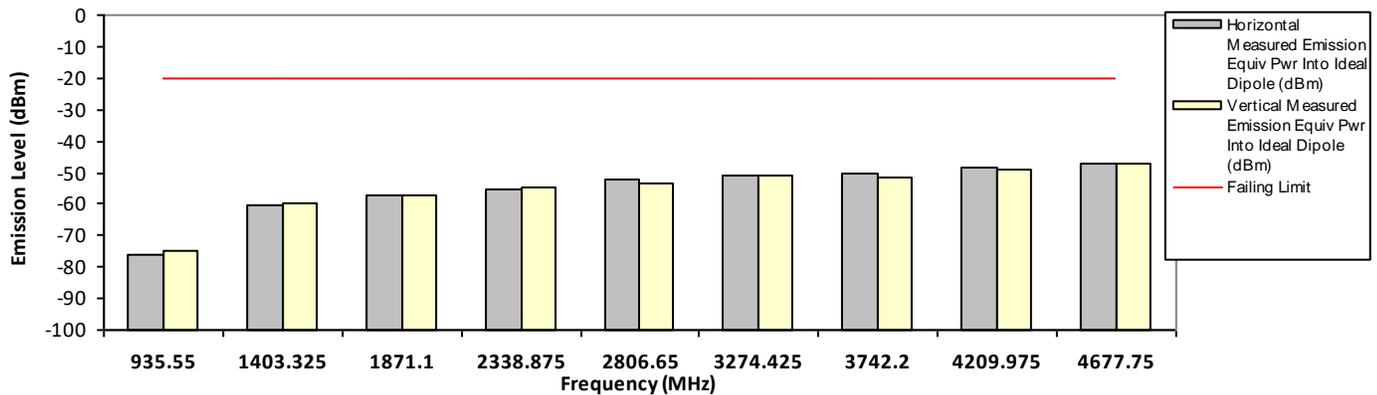

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A


Accy Part No: NA

Test Mode: TX Digital  
 12.5 kHz

482.012500 MHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
964.0250	-20.0000	-74.5220 **	-74.1535 **
1446.0375	-20.0000	-58.5300 *	-58.7900 *
1928.0500	-20.0000	-55.9591 **	-55.5549 **
2410.0625	-20.0000	-54.8958 **	-53.8715 **
2892.0750	-20.0000	-52.9448 **	-52.5662 **
3374.0875	-20.0000	-51.4731 **	-51.2312 **
3856.1000	-20.0000	-49.1742 **	-49.8823 **
4338.1125	-20.0000	-49.1404 **	-47.7066 **
4820.1250	-20.0000	-45.7353 **	-46.5899 **

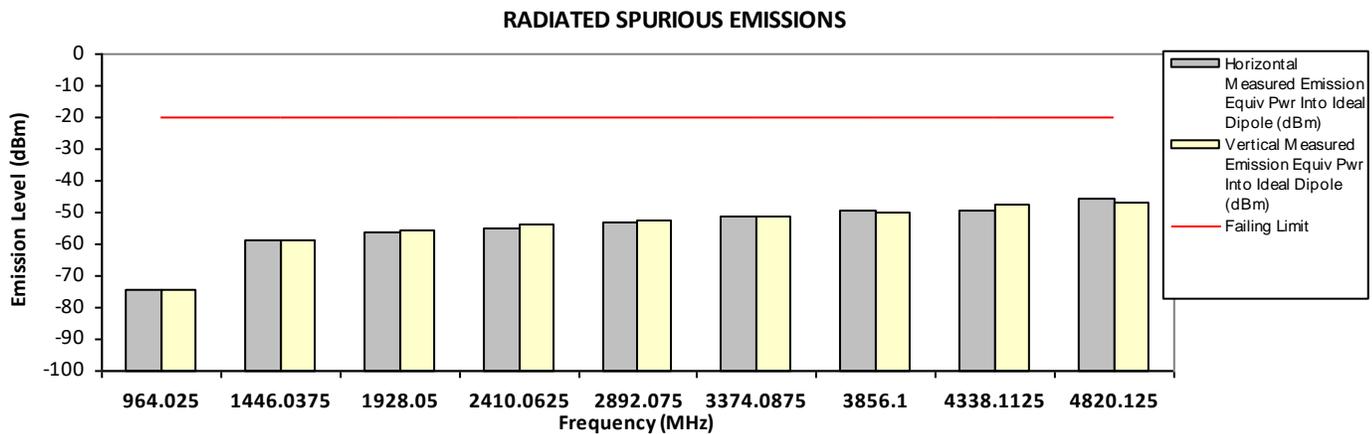

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital


511.987500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-56.7400 *	-55.7900 *
1535.9625	-20.0000	-59.2751 **	-59.4587 **
1716.8400	-20.0000	-56.9200 *	-57.4400 *
2047.9500	-20.0000	-55.6136 **	-54.8676 **
2559.9375	-20.0000	-54.2690 **	-52.9570 **
3071.9250	-20.0000	-50.9540 **	-51.3544 **
3583.9125	-20.0000	-50.7408 **	-51.5836 **
4095.9000	-20.0000	-49.6838 **	-49.7616 **
4607.8875	-20.0000	-47.9233 **	-48.3340 **
5119.8750	-20.0000	-45.6650 **	-45.8125 **

RADIATED SPURIOUS EMISSIONS

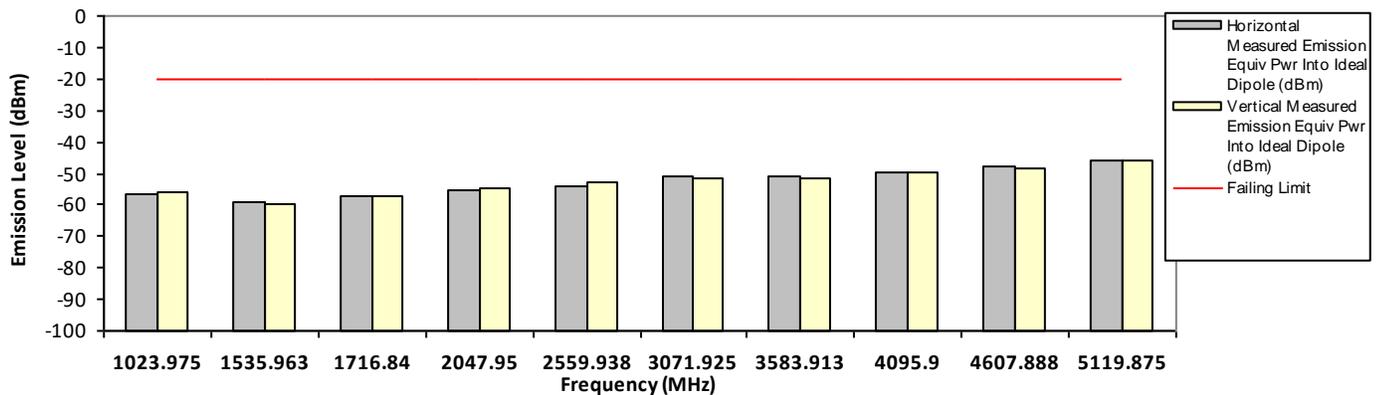

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital

511.987500 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-56.5500 *	-55.7600 *
1535.9625	-20.0000	-57.6600 *	-58.1000 *
2047.9500	-20.0000	-53.9224 **	-55.4070 **
2559.9375	-20.0000	-52.6998 **	-53.3689 **
3071.9250	-20.0000	-51.0830 **	-52.0329 **
3583.9125	-20.0000	-52.0485 **	-50.0420 **
4095.9000	-20.0000	-49.1056 **	-49.6155 **
4607.8875	-20.0000	-46.4596 **	-47.4744 **
5119.8750	-20.0000	-45.4369 **	-45.3891 **

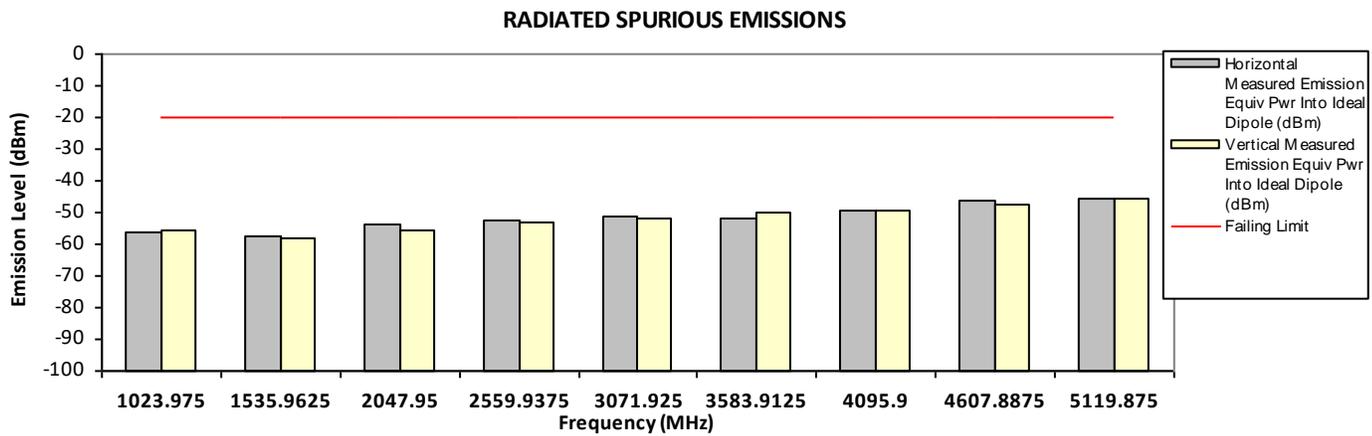

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

**Not for FCC review**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**


**Test Mode: TX Digital**

**519.987500 MHz**

**12.5 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1039.9750	-20.0000	-56.0900 *	-55.7000 *
1559.9625	-20.0000	-59.1589 **	-58.6930 **
2079.9500	-20.0000	-54.7961 **	-55.3645 **
2599.9375	-20.0000	-52.3504 **	-53.9574 **
3119.9250	-20.0000	-51.1927 **	-50.8439 **
3639.9125	-20.0000	-50.5923 **	-50.4447 **
4159.9000	-20.0000	-49.4840 **	-49.0678 **
4679.8875	-20.0000	-46.7437 **	-48.1622 **
5199.8750	-20.0000	-45.5677 **	-44.7026 **

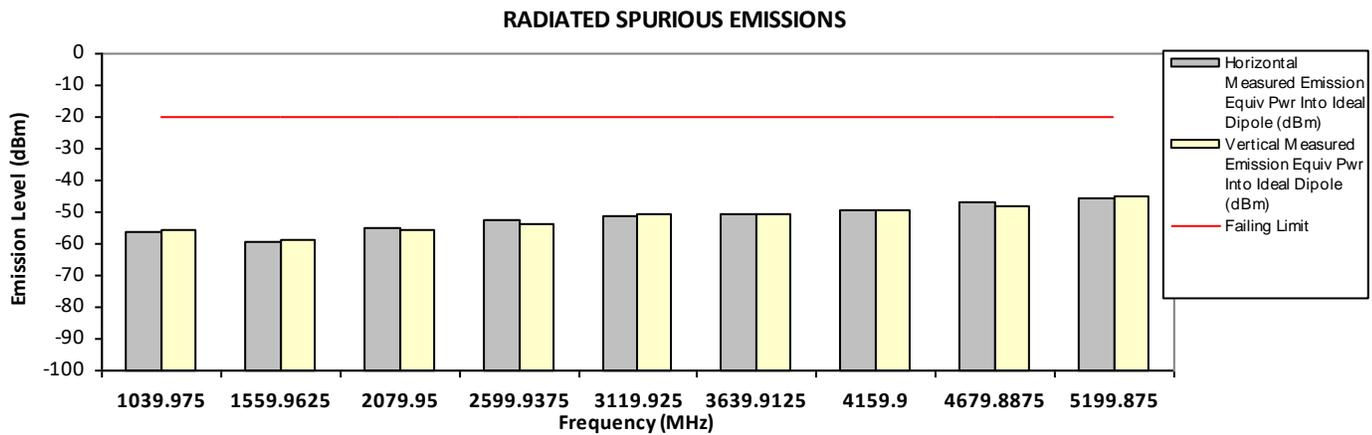

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.  
 Motorola Penang EMC Lab - Test Performed by: Aiman Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.  
 \*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

**Not for FCC review**

**SAC Transmitter Radiated Emission:**

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital Phase II


380.012500 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-77.9412 **	-76.8935 **
1140.0375	-20.0000	-53.4300 *	-51.5100 *
1520.0500	-20.0000	-59.5730 **	-58.8633 **
1900.0625	-20.0000	-57.2489 **	-55.7967 **
2280.0750	-20.0000	-54.8955 **	-55.2074 **
2660.0875	-20.0000	-52.9018 **	-53.2495 **
3040.1000	-20.0000	-52.7478 **	-52.1530 **
3420.1125	-20.0000	-51.3304 **	-51.3608 **
3800.1250	-20.0000	-50.5431 **	-49.5842 **

**RADIATED SPURIOUS EMISSIONS**

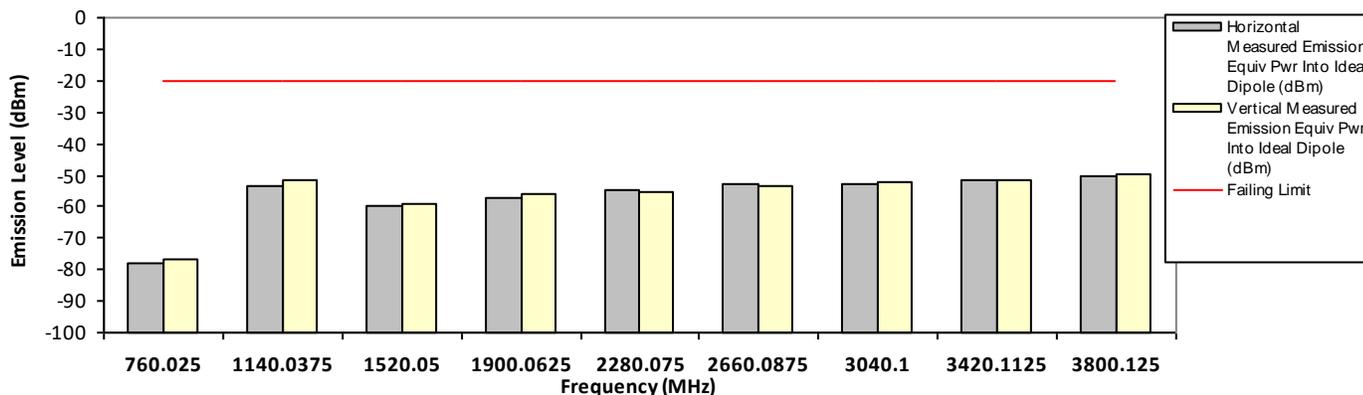

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital Phase II

406.200000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-76.3649 **	-77.2452 **
1218.6000	-20.0000	-60.3739 **	-60.5654 **
1624.8000	-20.0000	-59.2383 **	-58.8622 **
2031.0000	-20.0000	-54.6106 **	-55.2553 **
2437.2000	-20.0000	-53.9194 **	-54.3100 **
2843.4000	-20.0000	-53.4085 **	-52.6698 **
3249.6000	-20.0000	-50.6340 **	-50.5141 **
3655.8000	-20.0000	-50.5582 **	-50.5553 **
4062.0000	-20.0000	-49.7258 **	-49.9253 **

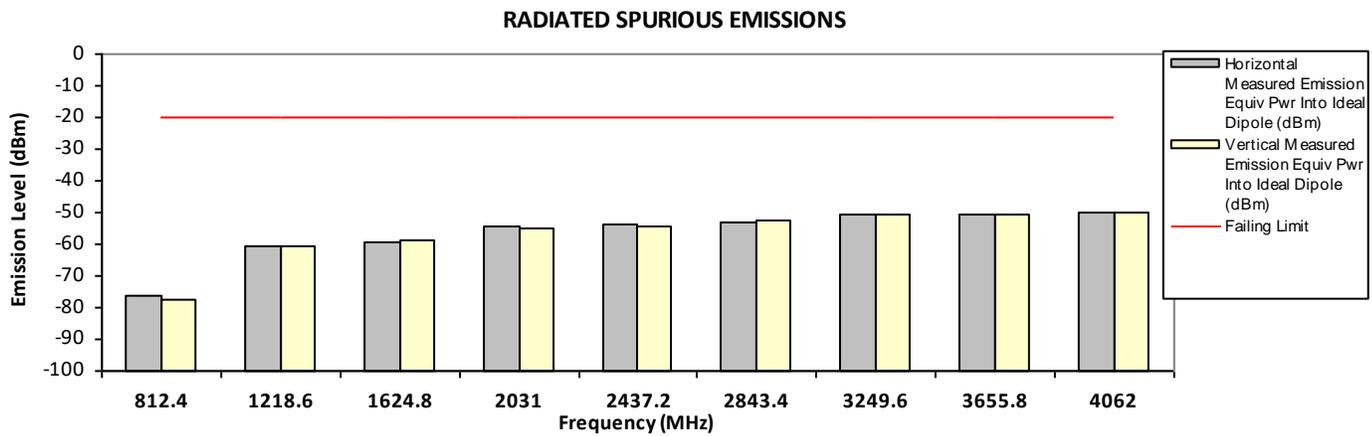

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital Phase II


450.025000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-76.3632 **	-74.4737 **
1350.0750	-20.0000	-60.0249 **	-60.1131 **
1800.1000	-20.0000	-58.3963 **	-56.5929 **
2250.1250	-20.0000	-55.6849 **	-56.1999 **
2700.1500	-20.0000	-53.3615 **	-53.4758 **
3150.1750	-20.0000	-50.6053 **	-51.4344 **
3600.2000	-20.0000	-50.6067 **	-51.1545 **
4050.2250	-20.0000	-50.2034 **	-49.1088 **
4500.2500	-20.0000	-48.1780 **	-47.6688 **

RADIATED SPURIOUS EMISSIONS

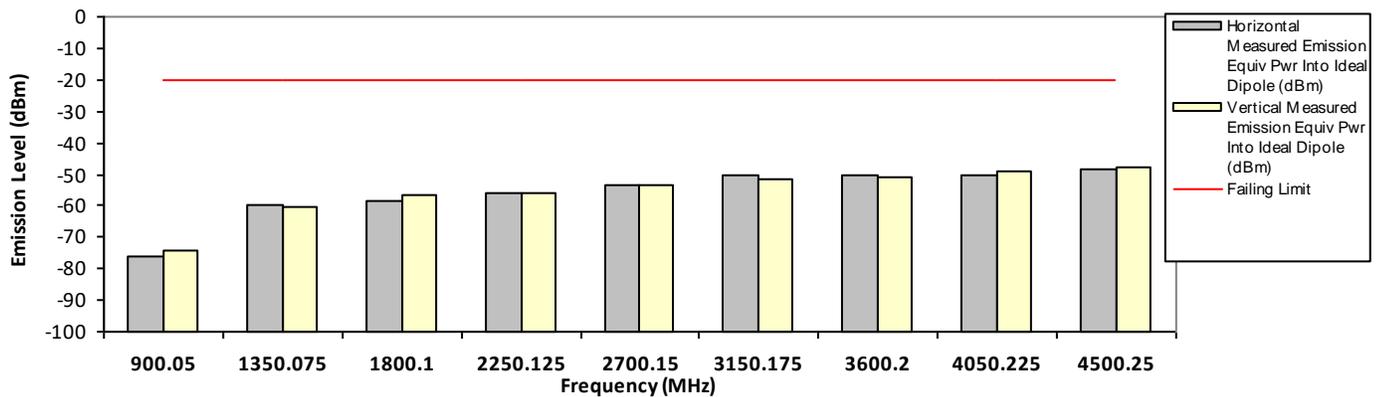

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital Phase II

450.025000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-74.3988 **	-75.6584 **
1350.0750	-20.0000	-60.2601 **	-59.6049 **
1800.1000	-20.0000	-58.1490 **	-58.4313 **
2250.1250	-20.0000	-55.8663 **	-56.0983 **
2700.1500	-20.0000	-53.8565 **	-53.5216 **
3150.1750	-20.0000	-51.0827 **	-50.6120 **
3600.2000	-20.0000	-51.8369 **	-50.8732 **
4050.2250	-20.0000	-49.2875 **	-49.1042 **
4500.2500	-20.0000	-47.9732 **	-47.4761 **

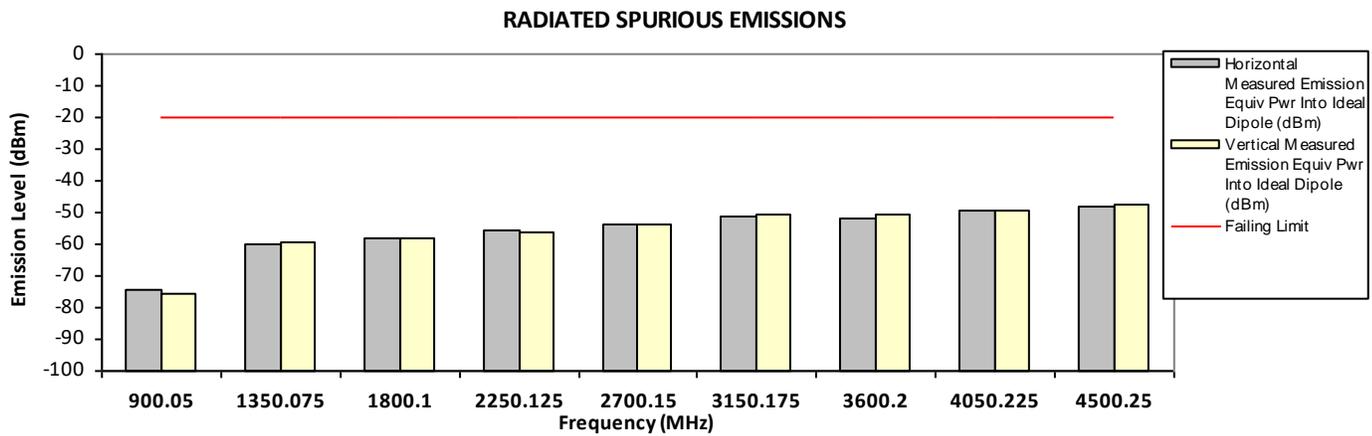

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital Phase II


459.125000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-75.1279 **	-75.3825 **
1377.3750	-20.0000	-59.9745 **	-59.3350 **
1836.5000	-20.0000	-56.9069 **	-56.3660 **
2295.6250	-20.0000	-55.0401 **	-55.4367 **
2754.7500	-20.0000	-53.2310 **	-54.0460 **
3213.8750	-20.0000	-51.0429 **	-51.2965 **
3673.0000	-20.0000	-51.3104 **	-51.5213 **
4132.1250	-20.0000	-49.1909 **	-49.3002 **
4591.2500	-20.0000	-47.2572 **	-47.6922 **

RADIATED SPURIOUS EMISSIONS

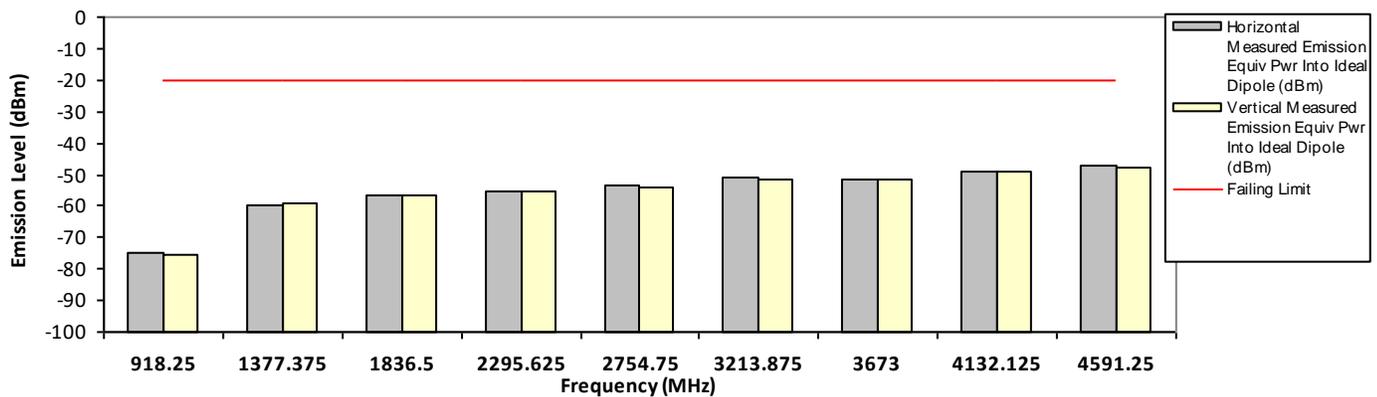

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital Phase II

467.775000 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-75.5615 **	-74.6363 **
1403.3250	-20.0000	-58.8800 *	-57.7600 *
1871.1000	-20.0000	-56.7124 **	-56.6712 **
2338.8750	-20.0000	-53.5439 **	-55.0119 **
2806.6500	-20.0000	-54.1012 **	-53.9043 **
3274.4250	-20.0000	-51.1928 **	-51.3597 **
3742.2000	-20.0000	-50.8598 **	-51.5202 **
4209.9750	-20.0000	-48.1051 **	-49.0217 **
4677.7500	-20.0000	-47.4381 **	-47.2023 **

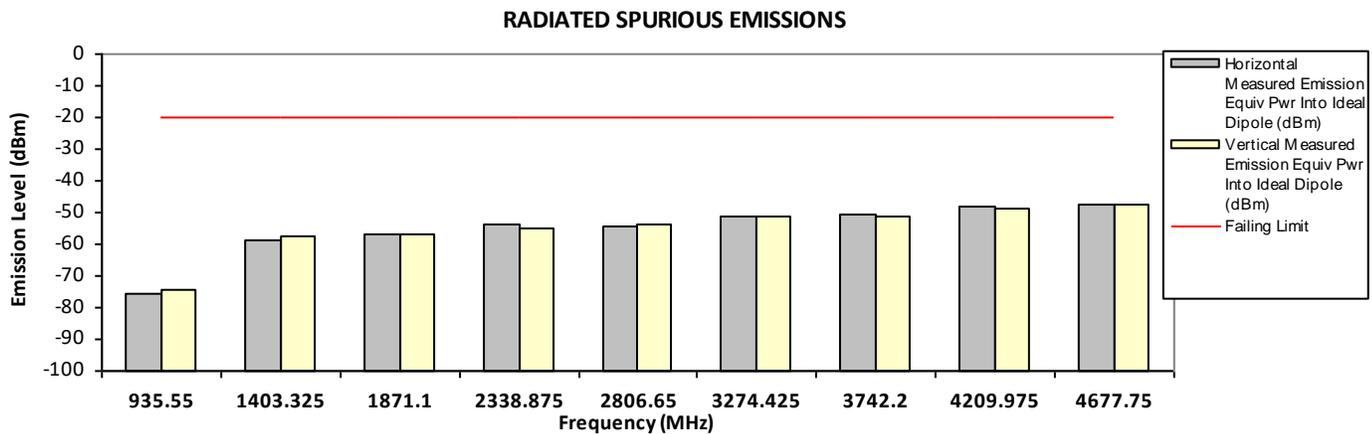

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA

Test Mode: TX Digital Phase II


482.012500 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
964.0250	-20.0000	-75.3783 **	-74.1276 **
1446.0375	-20.0000	-60.1034 **	-58.9492 **
1928.0500	-20.0000	-55.7083 **	-55.5958 **
2410.0625	-20.0000	-54.3482 **	-53.2060 **
2892.0750	-20.0000	-54.0193 **	-52.8925 **
3374.0875	-20.0000	-51.5078 **	-50.8838 **
3856.1000	-20.0000	-49.3598 **	-50.3714 **
4338.1125	-20.0000	-49.3421 **	-49.4329 **
4820.1250	-20.0000	-46.8914 **	-46.0726 **

RADIATED SPURIOUS EMISSIONS

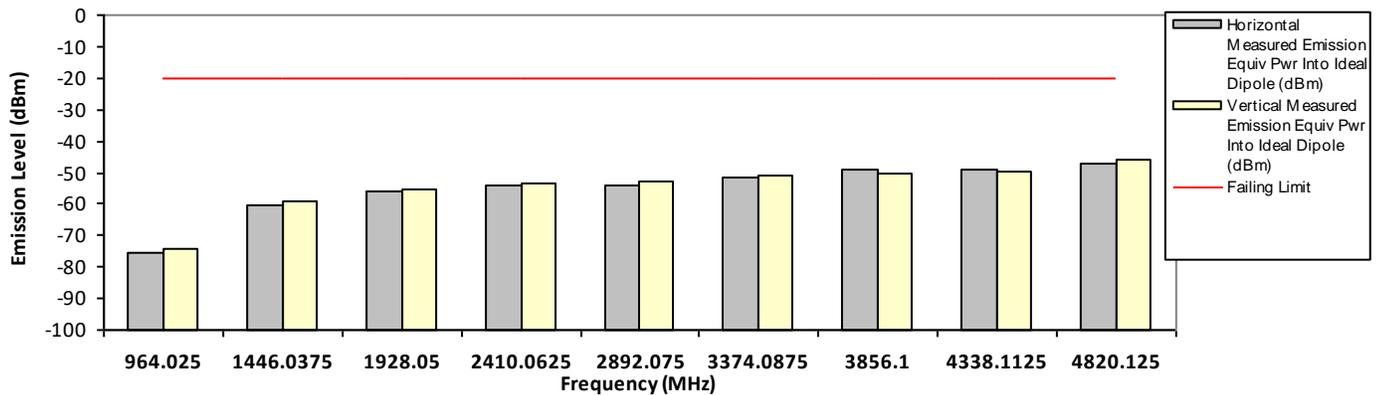

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital Phase II

511.987500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-55.8300 *	-55.7300 *
1535.9625	-20.0000	-60.0035 **	-58.7345 **
2047.9500	-20.0000	-55.4192 **	-55.8071 **
2559.9375	-20.0000	-53.3677 **	-52.8922 **
3071.9250	-20.0000	-51.8592 **	-51.0808 **
3583.9125	-20.0000	-51.4026 **	-51.8618 **
4095.9000	-20.0000	-49.1767 **	-49.3968 **
4607.8875	-20.0000	-47.8157 **	-47.4828 **
5119.8750	-20.0000	-45.4178 **	-44.3462 **

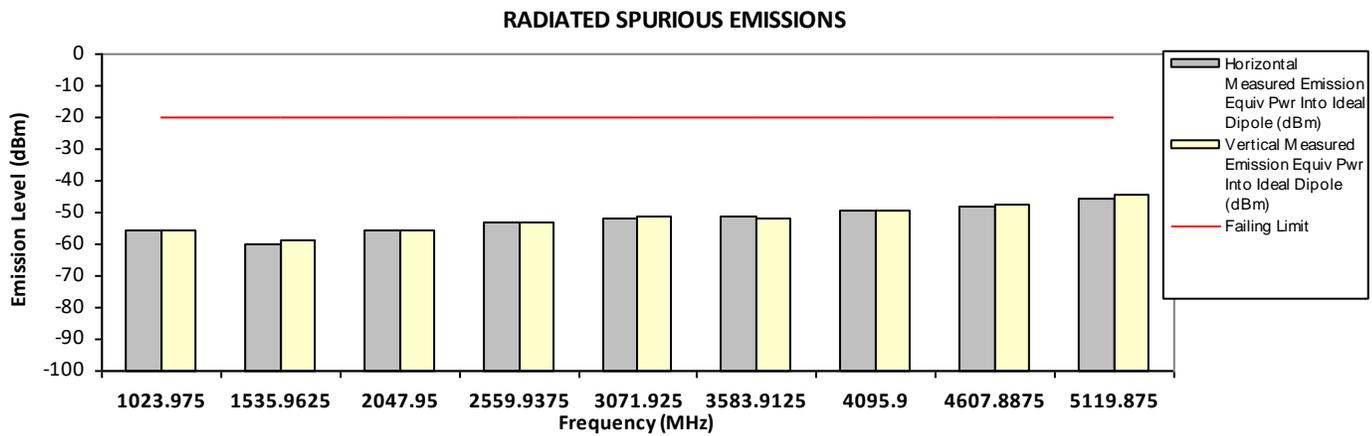

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: H35XDT9PW8AN-H

S/N: 022TAB0402

SR:40793-EMC-00062

Battery Part No: PMNN4818A

Accy Part No: NA


Test Mode: TX Digital Phase II

511.987500 MHz

12.5 kHz

5.700 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1023.9750	-20.0000	-54.7800 *	-54.9500 *
1535.9625	-20.0000	-58.4500 *	-58.3000 *
2047.9500	-20.0000	-55.8517 **	-54.4677 **
2559.9375	-20.0000	-52.5281 **	-52.2149 **
3071.9250	-20.0000	-51.9796 **	-51.1310 **
3583.9125	-20.0000	-51.9284 **	-50.3144 **
4095.9000	-20.0000	-49.0107 **	-47.9522 **
4607.8875	-20.0000	-47.5676 **	-47.0287 **
5119.8750	-20.0000	-44.0536 **	-45.3061 **

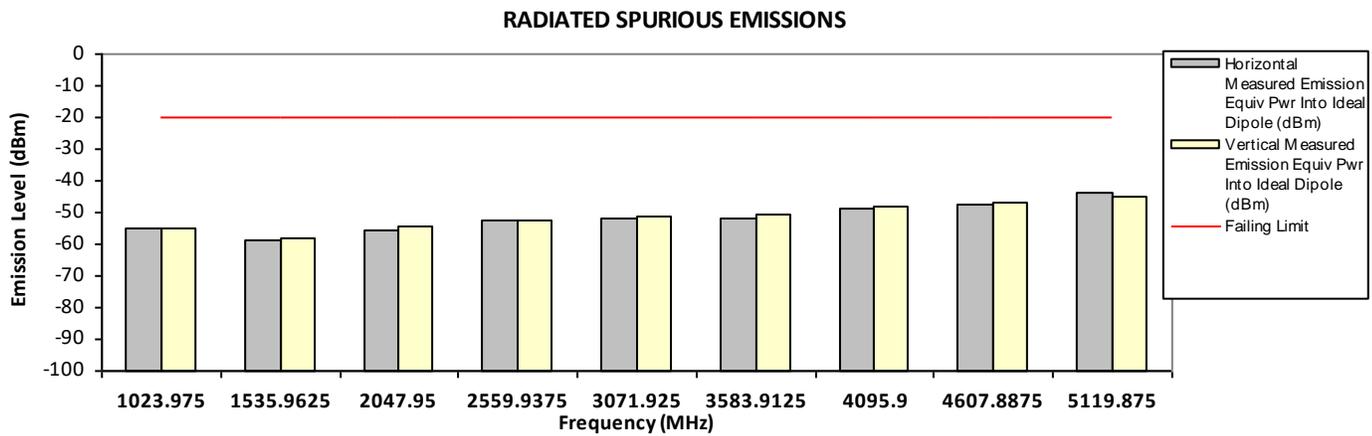

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

**Not for FCC review**

**SAC Transmitter Radiated Emission:**

**Model Number: H35XDT9PW8AN-H**

**S/N: 022TAB0402**

**SR:40793-EMC-00062**

**Battery Part No: PMNN4818A**

**Accy Part No: NA**

**Test Mode: TX Digital Phase II**


**519.987500 MHz**

**12.5 kHz**

**5.700 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1039.9750	-20.0000	-56.2100 *	-56.6300 *
1559.9625	-20.0000	-59.1628 **	-59.0607 **
2079.9500	-20.0000	-55.0163 **	-54.6028 **
2599.9375	-20.0000	-53.9141 **	-52.0117 **
3119.9250	-20.0000	-51.8480 **	-50.9274 **
3639.9125	-20.0000	-49.4447 **	-49.5715 **
4159.9000	-20.0000	-46.9628 **	-46.8664 **
4679.8875	-20.0000	-47.4138 **	-47.4942 **
5199.8750	-20.0000	-45.5142 **	-44.4330 **

**RADIATED SPURIOUS EMISSIONS**

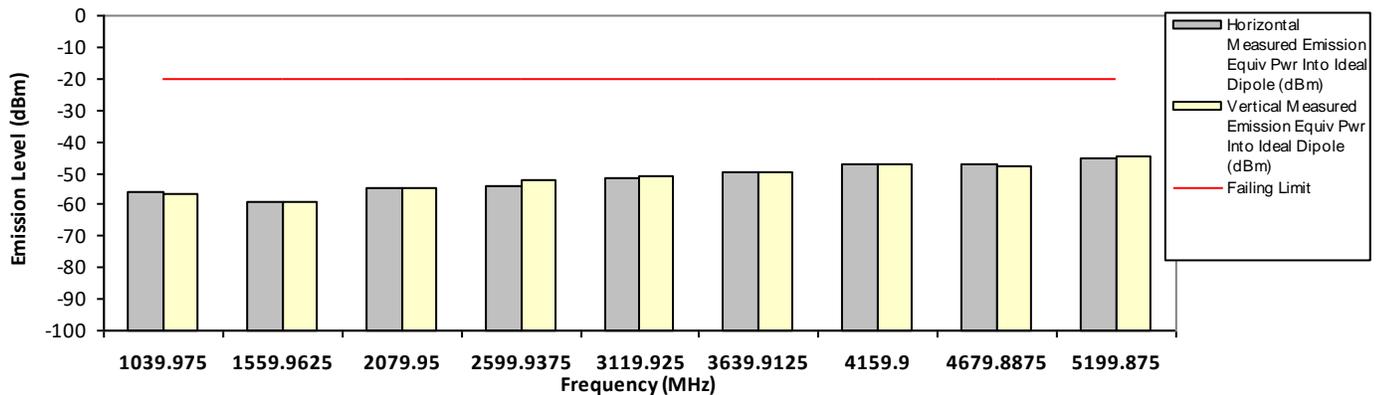

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Aiman

Thu, 22 Feb, 2024

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 20.9 Hum(%RH): 61.3

System MU: 4.03 dB

Remarks: 

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

**6.10.4. Test Limit**


Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	Not Applicable	50 + log <sub>10</sub> (P) (-20 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)
25kHz		Not Applicable		43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log <sub>10</sub> (P) (-13 dBm)	Not Applicable	50 + log <sub>10</sub> (P) (-20 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)
25kHz	Not Applicable	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)	43 + log <sub>10</sub> (P) (-13 dBm)

## 6.11. Effective Radiated Power (ERP)

### 6.11.1. Test Setup

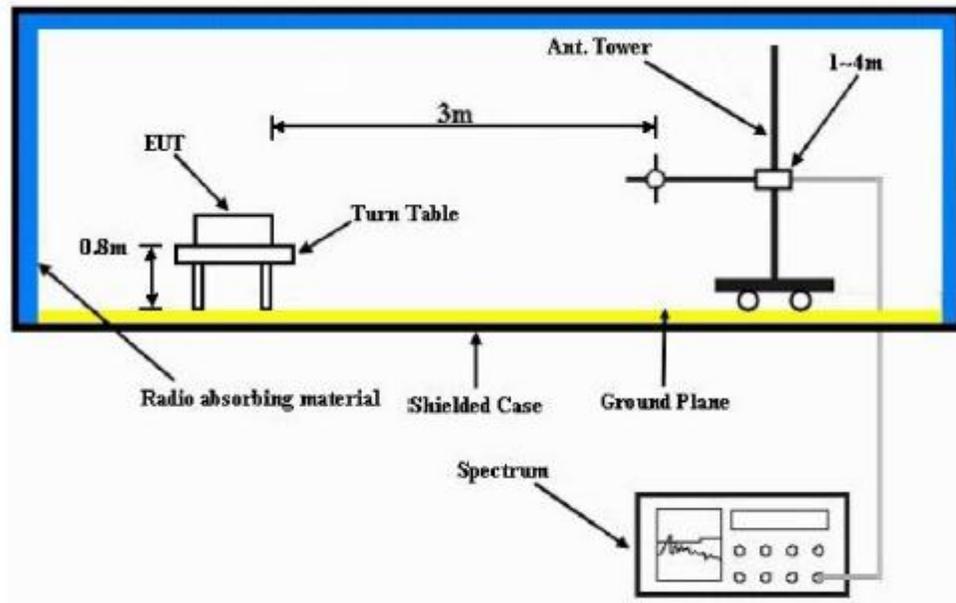

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for  $F_c < 1\text{GHz}$ ) or 1.5m (for  $F_c > 1\text{GHz}$ ) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

**6.11.2. Test Result**

**Part 80 EIRP/ERP**

SRID: 40793-EMC-00063  
S/N: 022TAB0352  
Channel Spacing: 25kHz  
Accessory: AN000452A01

Tx Measured Conducted Power: 2.000 Watts  
Modulation: Analog  
Battery: PMNN4818A


Antenna Polarization	Frequency (MHz)	EIRP (dBm)	ERP (dBm)	ERP (Watts)	Limit (Watts)	Result
Vert.	467.7750	35.11	32.96	1.98	2	Pass

**6.11.3. Test Limit**

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

## 6.12. GNSS (EIRP for 1559 - 1610MHz)

### 6.12.1. Test Setup

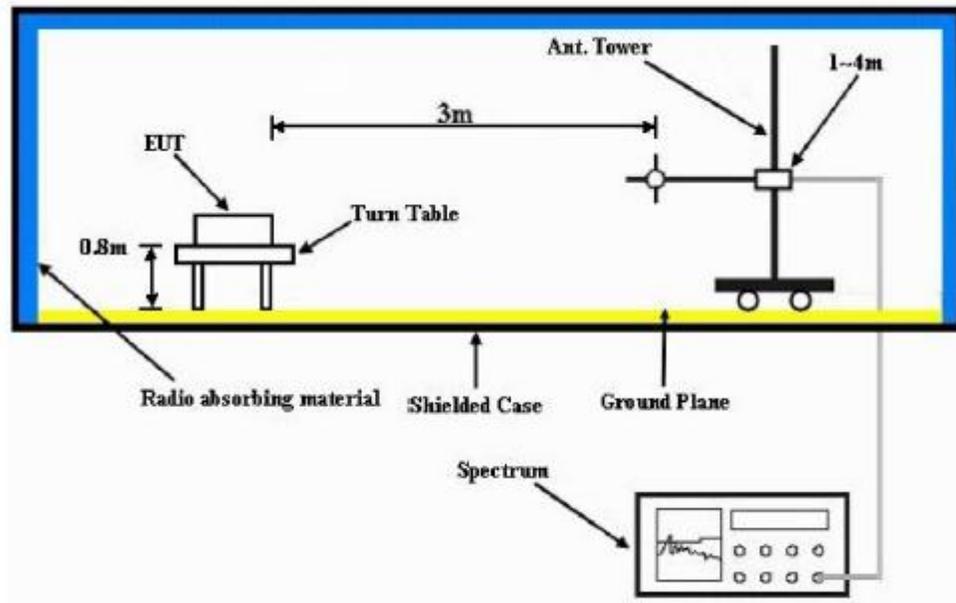

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7)  $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$ .

**6.12.1. Test Result**  
**Not Applicable**

**6.12.2. Test Limit**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

**~ End of Test Report ~**