

INDEX OF SUBMITTED MEASURED DATA

EXHIBIT 6F (Revised) – Conducted Spurious Emissions (12 Graphs):

- 6F-1: 48 Watts, 403.100 MHz, 25 kHz Channel Spacing
- 6F-2: 48 Watts, 435.100 MHz, 25 kHz Channel Spacing
- 6F-3: 48 Watts, 469.900 MHz, 25 kHz Channel Spacing
- 6F-4: 25 Watt, 403.100 MHz, 25 kHz Channel Spacing
- 6F-5: 25 Watt, 435.100 MHz, 25 kHz Channel Spacing
- 6F-6: 25 Watt, 469.900 MHz, 25 kHz Channel Spacing
- 6F-7: 48 Watts, 403.100 MHz, 12.5 kHz Channel Spacing
- 6F-8: 48 Watts, 435.100 MHz, 12.5 kHz Channel Spacing
- 6F-9: 48 Watts, 469.900 MHz, 12.5 kHz Channel Spacing
- 6F-10: 25 Watt, 403.100 MHz, 12.5 kHz Channel Spacing
- 6F-11: 25 Watt, 435.100 MHz, 12.5 kHz Channel Spacing
- 6F-12: 25 Watt, 469.900 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6G (Revised) – Radiated Spurious Emissions (12 Graphs):

- 6G-1: 48 Watts, 403.100 MHz, 25 kHz Channel Spacing
& 48 Watts, 435.100 MHz, 25 kHz Channel Spacing
- 6G-2: 48 Watts, 469.900 MHz, 25 kHz Channel Spacing
- 6G-3: 25 Watt, 403.100 MHz, 25 kHz Channel Spacing
& 25 Watt, 435.100 MHz, 25 kHz Channel Spacing
- 6G-4: 25 Watt, 469.900 MHz, 25 kHz Channel Spacing
- 6G-5: 48 Watts, 403.100 MHz, 12.5 kHz Channel Spacing
& 48 Watts, 435.100 MHz, 12.5 kHz Channel Spacing
- 6G-6: 48 Watts, 469.900 MHz, 12.5 kHz Channel Spacing
- 6G-7: 25 Watt, 403.100 MHz, 12.5 kHz Channel Spacing
& 25 Watt, 435.100 MHz, 12.5 kHz Channel Spacing
- 6G-8: 25 Watt, 469.900 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6F (Revised)
Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

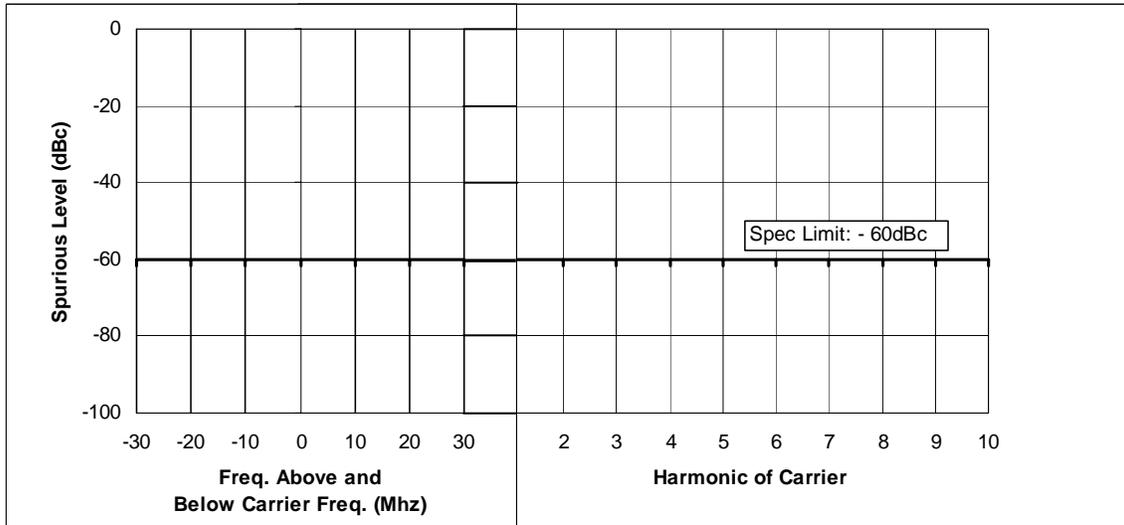


Table 6F-1: 48 Watts, 403.100 MHz, 25 kHz Channel Spacing

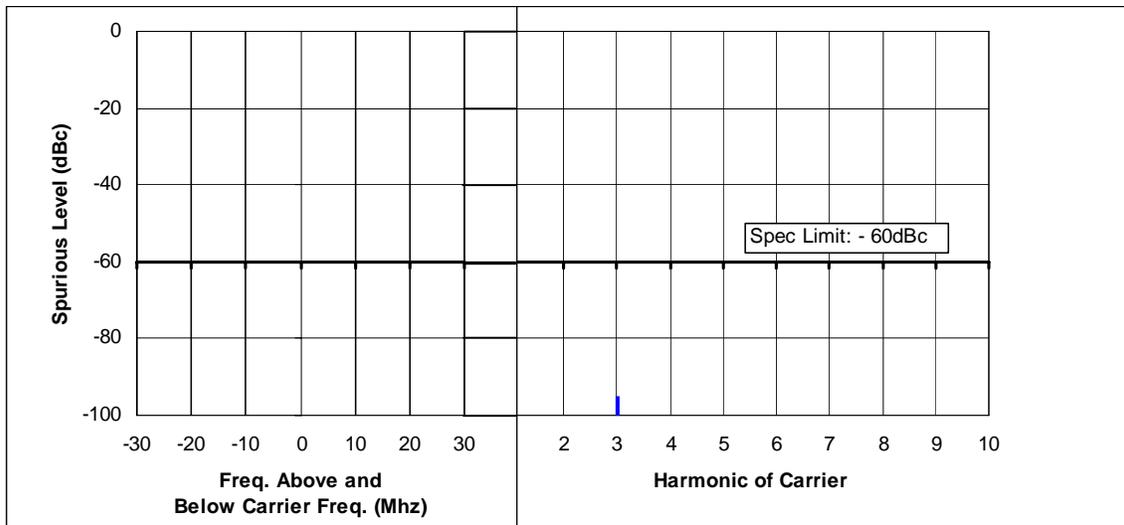


Table 6F-2: 48 Watts, 435.100 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

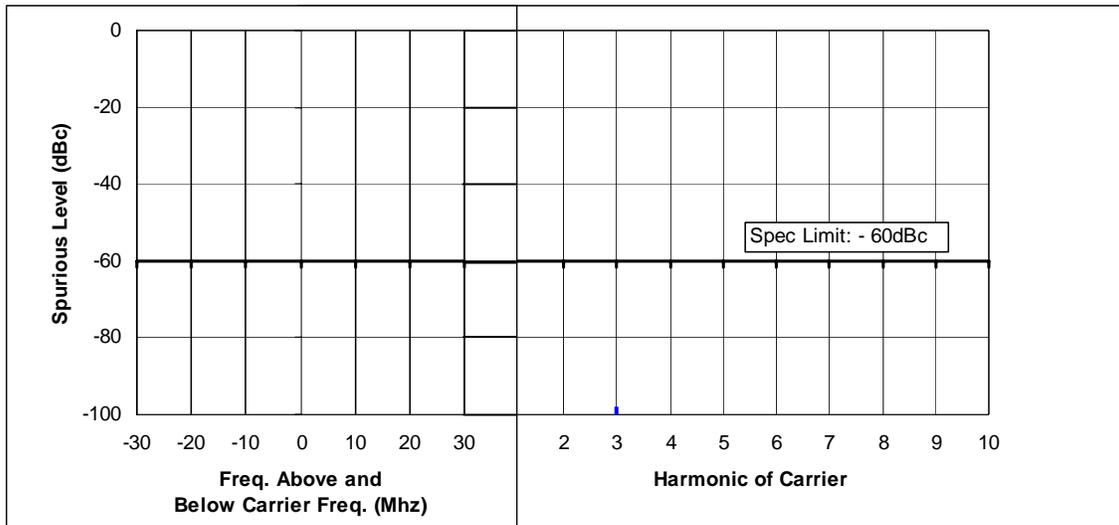


Table 6F-3: 48 Watts, 469.900 MHz, 25 kHz Channel Spacing

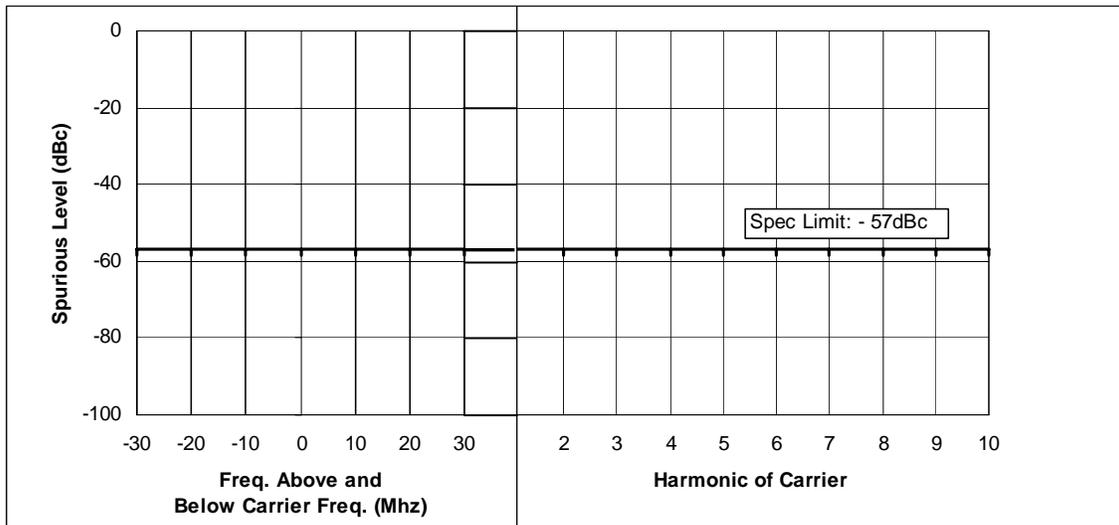


Table 6F-4: 25 Watts, 403.100 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

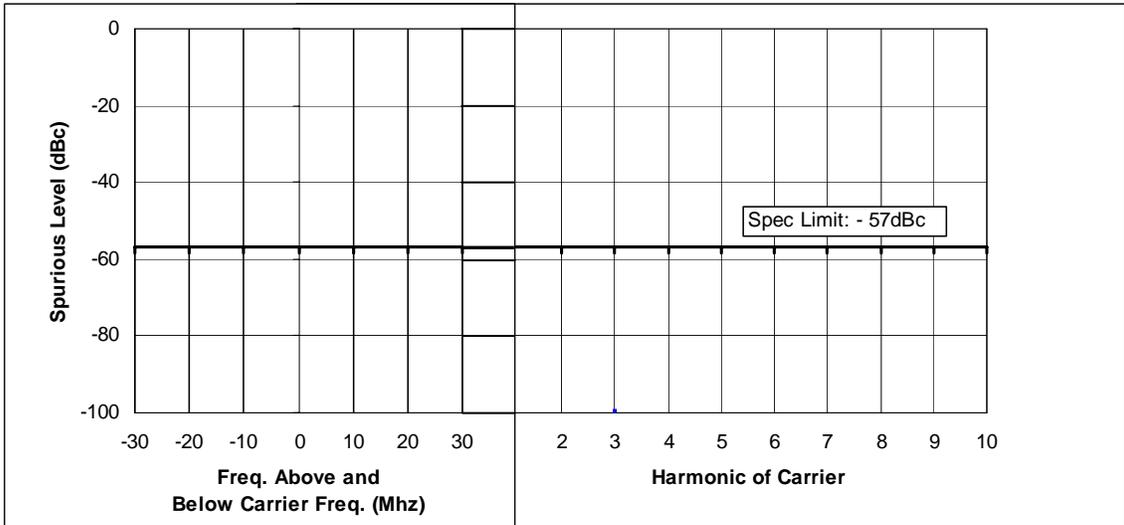


Table 6F-5: 25 Watts, 435.100 MHz, 25 kHz Channel Spacing

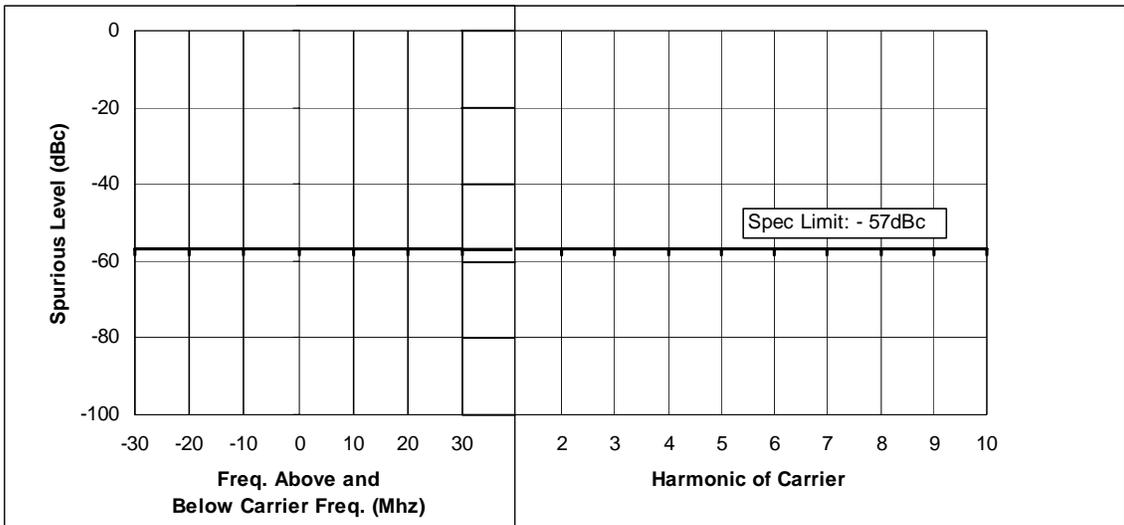


Table 6F-6: 25 Watts, 469.900 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

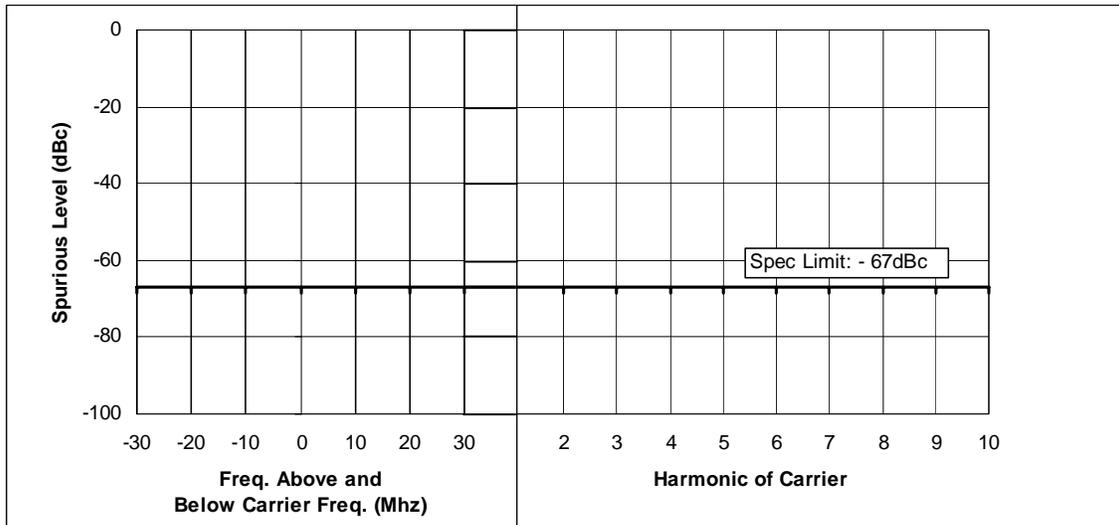


Table 6F-7: 48 Watts, 403.100 MHz, 12.5 kHz Channel Spacing

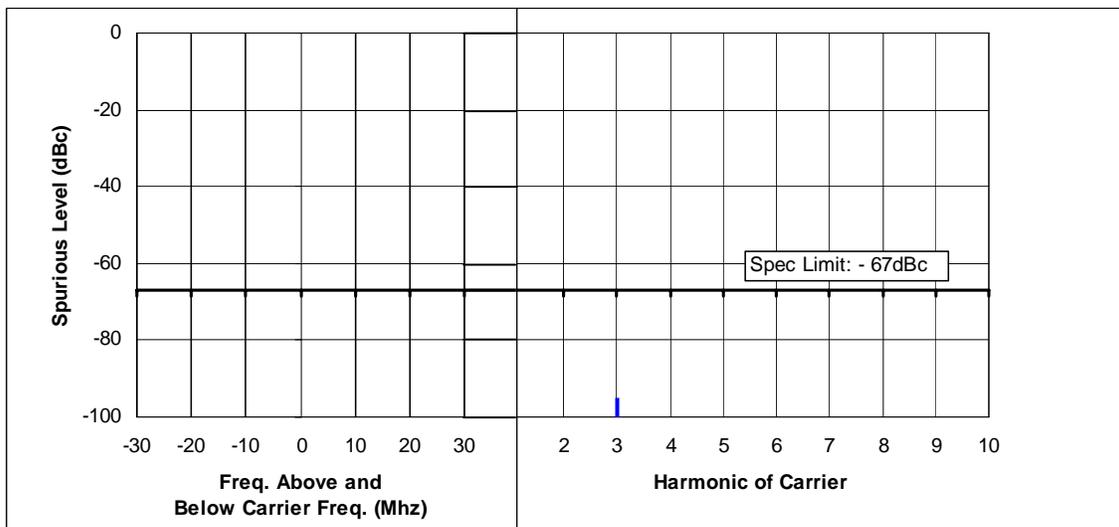


Table 6F-8: 48 Watts, 435.100 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

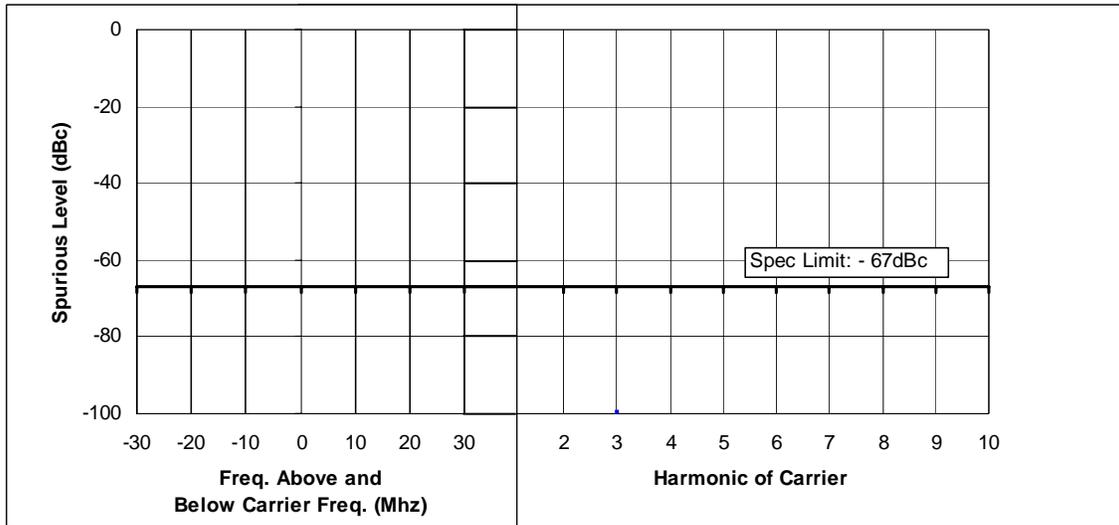


Table 6F-9: 48 Watts, 469.900 MHz, 12.5 kHz Channel Spacing

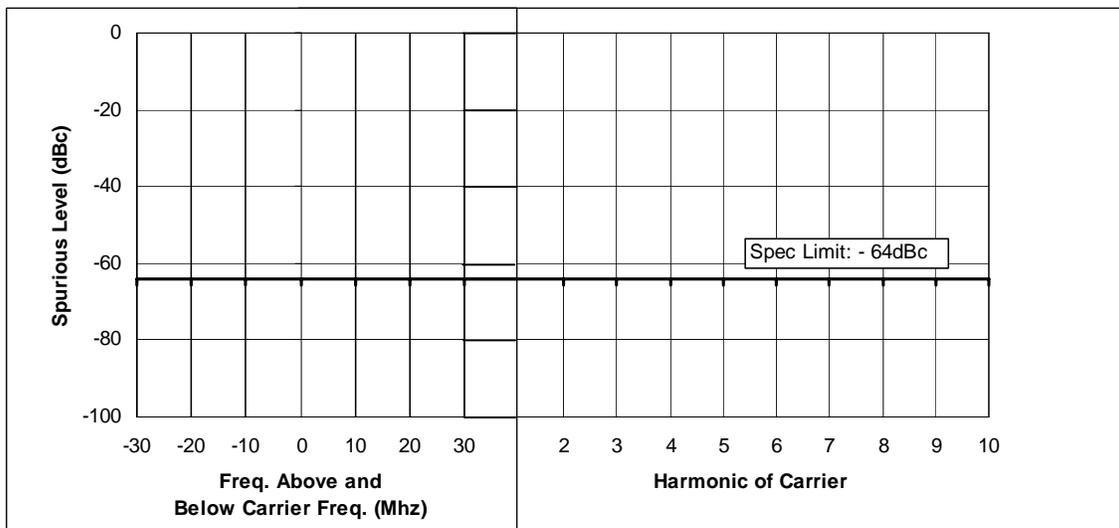


Table 6F-10: 25 Watts, 403.100 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

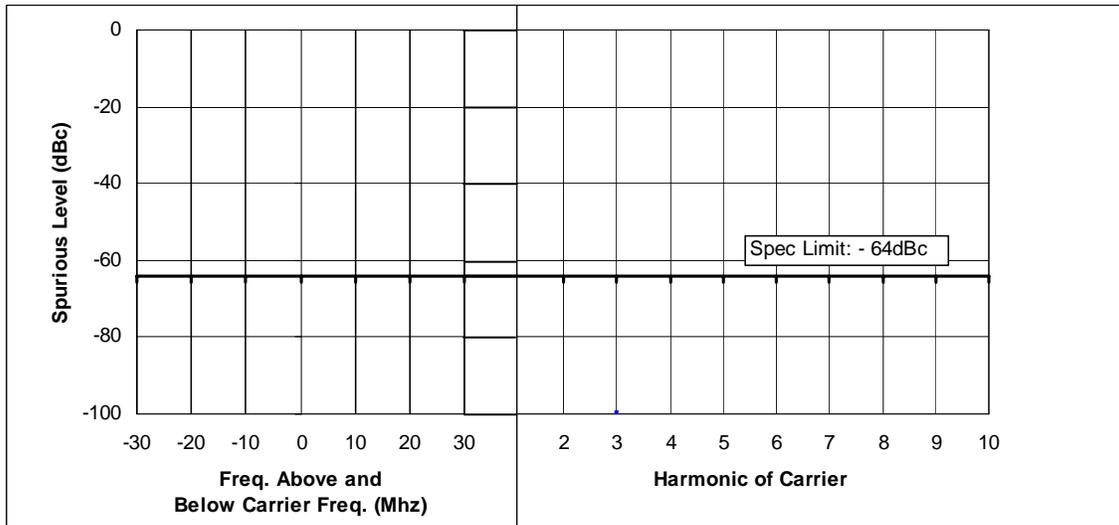


Table 6F-11: 25 Watts, 435.100 MHz, 12.5 kHz Channel Spacing

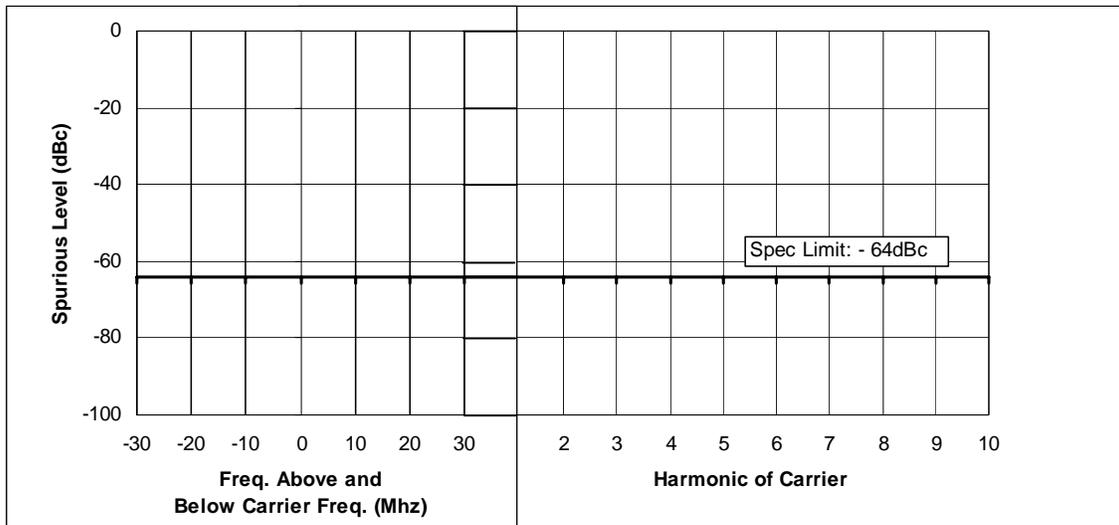



Table 6F-12: 25 Watts, 469.900 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

Exhibit 6-G (Revised)
Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

Transmit Radiated Spurious Emissions: EPP WARIS MOBILE
Tx Power: 48 Watts
403.1 MHz **Channel Spacing 25kHz | S/N BCGFFA65**


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.2000	-13	-58.67	-66.04
1209.3000	-13	-63.99	-63.15
1612.4000	-13	-70.38	-64.83
2015.5000	-13	-68.37	-57.55
2418.6000	-13	*	*
2821.7000	-13	-60.35	-53.25
3224.8000	-13	-61.49	-54.77
3627.9000	-13	*	*
4031.0000	-13	-62.79	-58.48

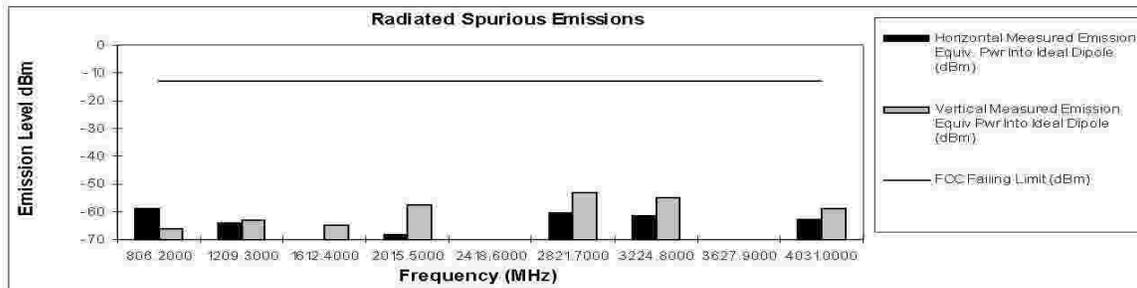

Transmit Radiated Spurious Emissions: EPP WARIS MOBILE
Tx Power: 48 Watts

435.1 MHz **Channel Spacing 25kHz | S/N BCGFFA65**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.2000	-13	*	*
1305.3000	-13	-56.76	-52.14
1740.4000	-13	-63.75	-58.31
2175.5000	-13	-59.75	-57.00
2610.6000	-13	-63.12	-59.87
3045.7000	-13	-41.41	-42.67
3480.8000	-13	*	*
3915.9000	-13	-63.02	-56.43
4351.0000	-13	*	*

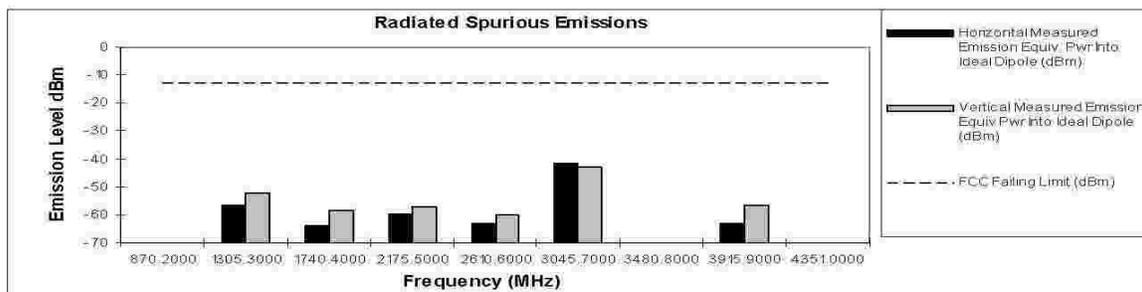

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679

September 22, 2006

6G-1: 48 Watts, 403.100 MHz, 25 kHz Channel Spacing
 & 48 Watts, 435.100 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 48 Watts

469.9 MHz

Channel Spacing 25kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.8000	-13	*	*
1409.7000	-13	-57.41	-52.29
1879.6000	-13	-59.40	-55.39
2349.5000	-13	-56.11	-58.27
2819.4000	-13	-38.80	-37.46
3289.3000	-13	-59.13	-54.38
3759.2000	-13	*	*
4229.1000	-13	*	-57.70
4699.0000	-13	*	-52.36

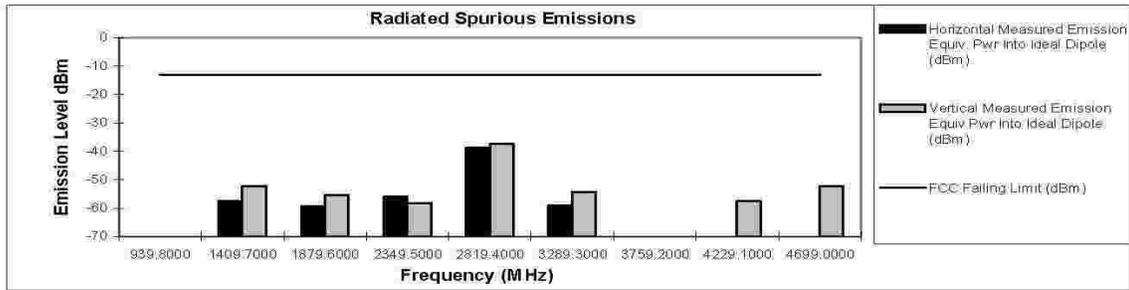

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679

September 22, 2006

6G-2: 48 Watts, 469.900 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

403.1 MHz

Channel Spacing 25kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.2000	-13	-59.98	-67.97
1209.3000	-13	-62.56	-64.81
1612.4000	-13	-70.34	-66.23
2015.5000	-13	-67.97	-65.27
2418.6000	-13	*	*
2821.7000	-13	-61.66	-55.11
3224.8000	-13	-61.31	-52.87
3627.9000	-13	*	*
4031.0000	-13	*	*

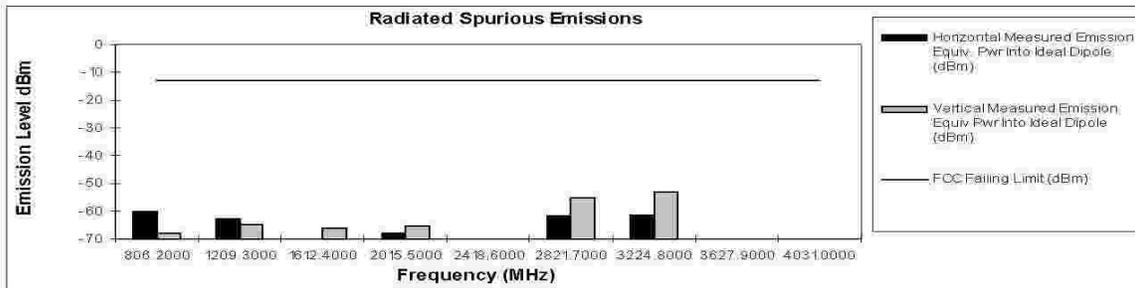


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

435.1 MHz

Channel Spacing 25kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.2000	-13	*	*
1305.3000	-13	-67.43	-59.07
1740.4000	-13	-64.98	-61.45
2175.5000	-13	-66.12	-63.02
2610.6000	-13	*	*
3045.7000	-13	-60.29	-53.13
3480.8000	-13	*	*
3915.9000	-13	*	*
4351.0000	-13	*	*

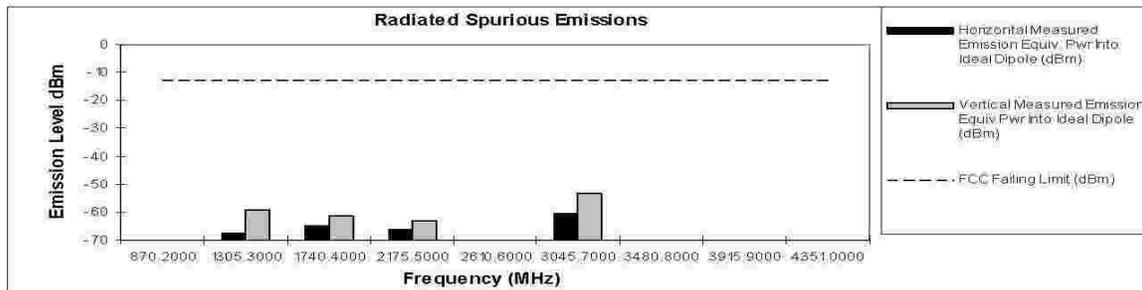

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679

September 22, 2006

6G-3: 25 Watt, 403.100 MHz, 25 kHz Channel Spacing
 & 25 Watt, 435.100 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

469.9 MHz

Channel Spacing 25kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.8000	-13	*	*
1409.7000	-13	-61.86	-57.63
1879.6000	-13	-65.28	-61.12
2349.5000	-13	-62.57	-60.09
2819.4000	-13	-62.84	-53.56
3289.3000	-13	*	*
3759.2000	-13	*	*
4229.1000	-13	*	*
4699.0000	-13	*	*

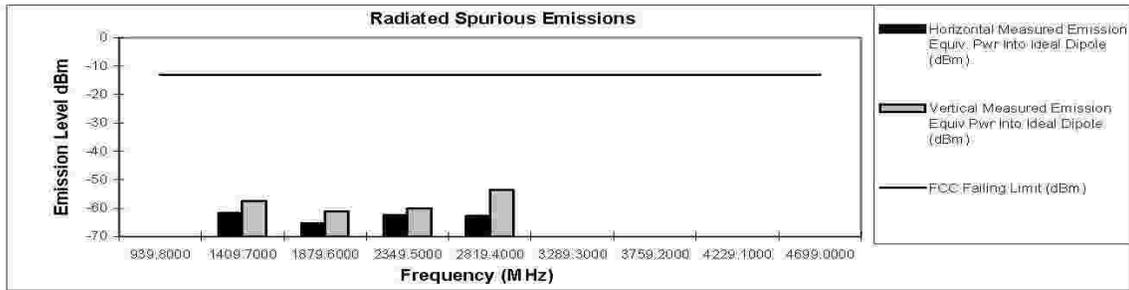

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679

September 22, 2006

6G-4: 25 Watt, 469.900 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 48 Watts

403.1 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.2000	-20	-54.82	-63.07
1209.3000	-20	-62.33	-63.03
1612.4000	-20	-69.84	-63.21
2015.5000	-20	-66.78	-64.73
2418.6000	-20	*	*
2821.7000	-20	-58.58	-53.86
3224.8000	-20	*	*
3627.9000	-20	*	*
4031.0000	-20	-61.27	-57.60

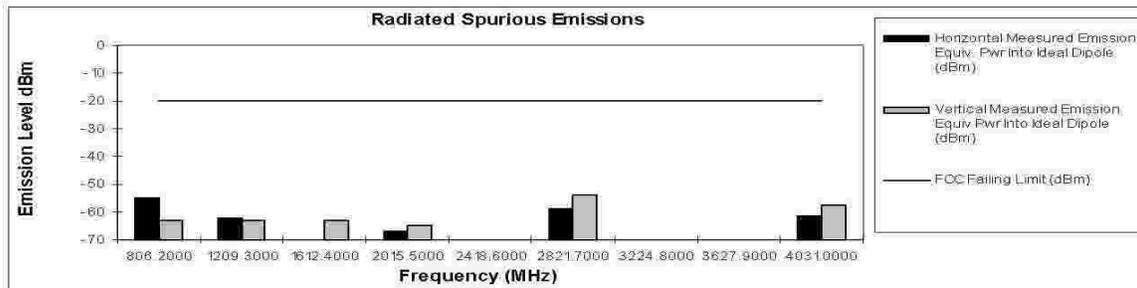


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 48 Watts

435.1 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.2000	-20	*	*
1305.3000	-20	-67.97	-62.46
1740.4000	-20	-63.44	-59.78
2175.5000	-20	-59.04	-57.71
2610.6000	-20	-64.68	-59.93
3045.7000	-20	-52.95	-31.30
3480.8000	-20	*	*
3915.9000	-20	-62.59	-56.56
4351.0000	-20	-62.65	-57.20

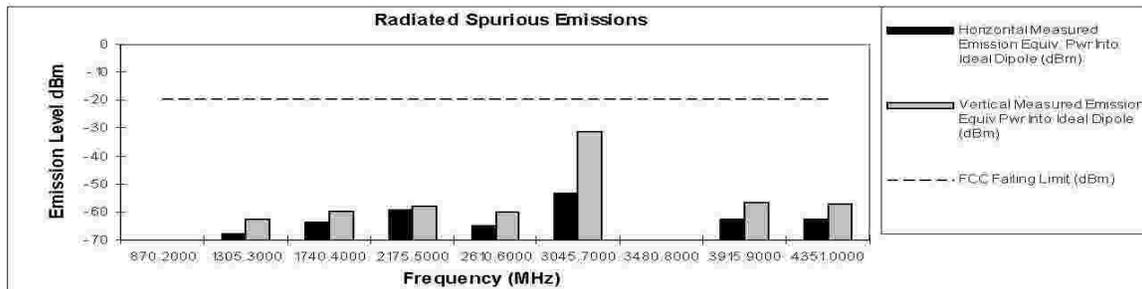

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679

September 20, 2006

6G-5: 48 Watts, 403.100 MHz, 12.5 kHz Channel Spacing
 & 48 Watts, 435.100 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 48 Watts

469.9 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.8000	-20	*	*
1409.7000	-20	-63.21	-61.26
1879.6000	-20	-63.78	-59.24
2349.5000	-20	-60.44	-59.21
2819.4000	-20	-43.82	-38.13
3289.3000	-20	-56.17	-54.70
3759.2000	-20	*	-59.42
4229.1000	-20	-62.17	-57.02
4699.0000	-20	-58.92	-54.45

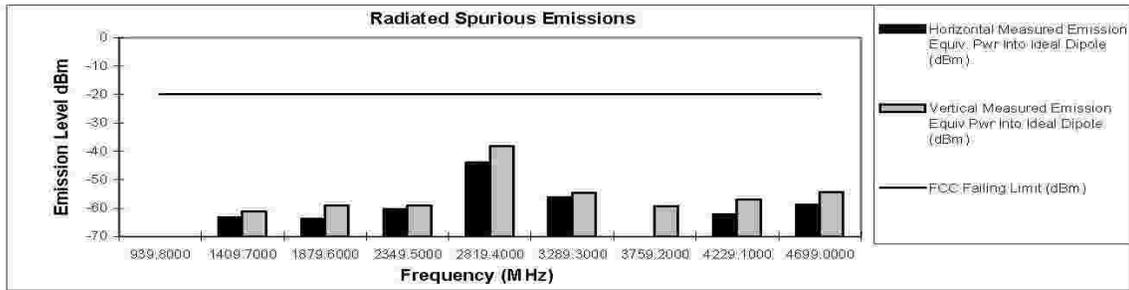

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679

September 20, 2006

6G-6: 48 Watts, 469.900 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

403.1 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.2000	-20	-60.66	-66.68
1209.3000	-20	-73.44	-72.47
1612.4000	-20	-70.88	-66.78
2015.5000	-20	-67.97	-65.44
2418.6000	-20	*	*
2821.7000	-20	-62.04	-55.91
3224.8000	-20	-61.66	-54.30
3627.9000	-20	*	*
4031.0000	-20	*	*

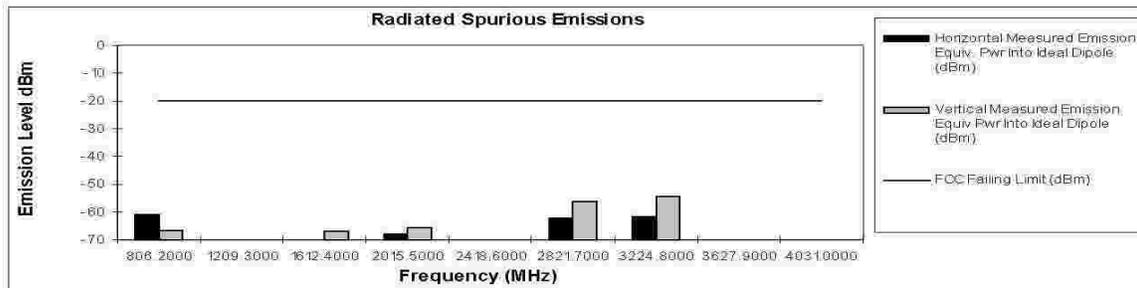


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

435.1 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
870.2000	-20	*	*
1305.3000	-20	-69.94	-65.43
1740.4000	-20	-64.26	-59.80
2175.5000	-20	-63.99	-63.25
2610.6000	-20	-65.60	-58.72
3045.7000	-20	-60.33	-50.64
3480.8000	-20	*	*
3915.9000	-20	*	*
4351.0000	-20	*	*

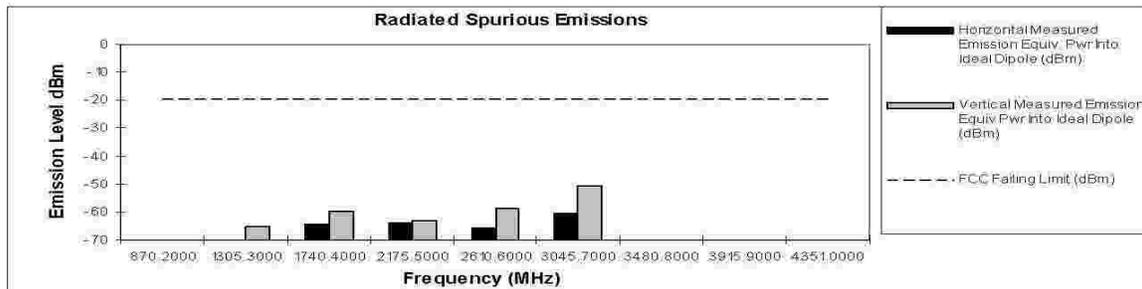

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
 FCC Registration: 91932 / Industry Canada: IC3679

September 20, 2006

6G-7: 25 Watt, 403.100 MHz, 12.5 kHz Channel Spacing
 & 25 Watt, 435.100 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EPP WARIS MOBILE

Tx Power: 25 Watts

469.9 MHz

Channel Spacing 12.5kHz | S/N BCGFFA65

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.8000	-20	*	*
1409.7000	-20	-69.19	-61.83
1879.6000	-20	*	*
2349.5000	-20	-60.93	-60.57
2819.4000	-20	-60.11	-43.69
3289.3000	-20	*	*
3759.2000	-20	*	*
4229.1000	-20	*	*
4699.0000	-20	*	*

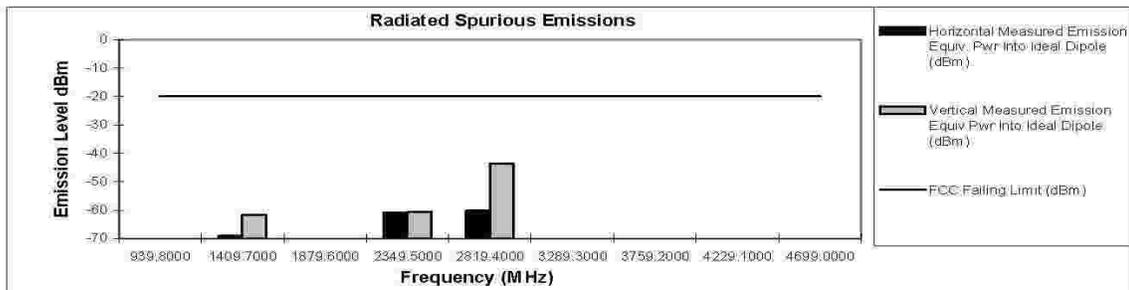

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennan
FCC Registration: 91932 / Industry Canada: IC3679

September 20, 2006

6G-8: 25 Watt, 469.900 MHz, 12.5 kHz Channel Spacing