

 MOTOROLA SOLUTIONS	 ACCREDITED TESTING CERT # 2518.01
---	--

DECLARATION OF COMPLIANCE: MPE/SAR ASSESSMENT

EME Test Laboratory 8000 West Sunrise Blvd Fort Lauderdale, FL. 33322	Date of Report: April 23, 2013 Report Revision: O Report ID: SR11149 MPE Auto rpt APX4500 UHF R1 Rev O 130423
--	--

Responsible Engineer: Stephen Whalen (Principal Staff EME Test Engineer)
Report author: William Elliott (Principal Staff EME Test Engineer)
Date(s) Tested: 03/08/13, 03/11/2013
Manufacturer/Location: Motorola Solutions, Penang, Malaysia
Date submitted for test: 02/19/2013
DUT Description: APX4500 UHF R1 40W (380 – 470 MHz)
Test TX mode(s): CW
Max. Power output: 48W
TX Frequency Bands: 380 – 470 MHz
Signaling type: Analog, APCO 25, and TDMA 1:2 (F2)
Model(s) Tested: M22QSS9PW1AN
Model(s) Certified: M22QSS9PW1AN
Serial Number(s): 471TPB0760
Classification: Occupational/Controlled Environment
FCC ID: AZ492FT4915
 Part 22 & 90 UHF (406.1 - 470MHz) Results outside FCC bands are not applicable for FCC compliance demonstration.

IC: 109U-92FT4915
 IC bands; UHF (406 – 430 MHz) & (450 -470MHz)
 Results outside IC bands are not applicable for IC compliance demonstration.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 3.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.
 This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006
 The results and statements contained in this report pertain only to the device(s) evaluated herein.

 Deanna Zakharia EME Lab Senior Resource Manager and Laboratory Director Approval Date: 4/23/2013	Certification Date: 4/23/2013 Certification No.: L1130422P
---	---

Document Revision History

Date	Revision	Comments
04/23/2013	O	Initial release

Table of Contents

1.0 Introduction..... 4

2.0 Abbreviations / Definitions..... 4

3.0 Referenced Standards and Guidelines..... 4

4.0 Power Density Limits..... 5

5.0 N_c Test Channels..... 6

6.0 Measurement Equipment 6

7.0 Measurement System Uncertainty Levels..... 6

8.0 Product and System Description 7

9.0 Additional Options and Accessories 7

10.0 Test Set-Up Description..... 7

11.0 Method of Measurement with trunk mounted antenna(s)..... 8

 11.1 External/Bystander vehicle MPE measurements..... 8

 11.2 Internal/Passenger vehicle MPE measurements 8

12.0 Method of Measurement with roof mounted antenna(s)..... 9

 12.1 External/Bystander vehicle MPE measurements..... 9

 12.2 Internal/Passenger vehicle MPE measurements 9

13.0 MPE Calculations 10

14.0 Antenna Summary..... 11

15.0 Test Results Summary 11

16.0 Conclusion 22

 Appendix A - Illustration of Antenna Locations and Test Distances 23

 Appendix B - Probe Calibration Certificates 26

 Appendix C - Photos of Assessed Antennas..... 31

 Appendix D – MPE Measurement Results 32

 Appendix E - SAR Simulation Report..... 46

1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola Solutions' outside test site and Specific Absorption Rate (SAR) simulations for product model M22QSS9PW1AN.

2.0 Abbreviations / Definitions

APCO: Association of Public-Safety Communications Officials
BS: Bystander
C4FM: Compatible 4-Level Frequency Modulation
CNR: Calibration Not Required
CQPSK: Compatible Quadrature Phase Shift Keying
CW: Continuous Wave
DUT: Device Under Test
EME: Electromagnetic Energy
F2: 2 slot Time Division Multiple Access
FM: Frequency Modulation
MPE: Maximum Permissible Exposure
NA: Not Applicable
PB: Passenger Backseat
PF: Passenger Front seat
PTT: Push to Talk
SAR: Specific Absorption Rate
TDMA: Time Division Multiple Access

3.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2009), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz

4.0 Power Density Limits

Table 1 – Occupational / Controlled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS 102 issue 4 - 2010
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
30 - 300	1.0				*10.0
10 - 400		10.0			
100 - 300			1.0	10.0	
300 - 1,500	f/300				f/30
300 - 3,000			f/300	f/30	
400 - 2,000		f/40			
1,500 - 15,000					50.0
1,500 - 100,000	5.0				
2,000 - 300,000		50.0			
3,000 - 300,000			10.0	100.0	

*Power density limit is applicable at frequencies greater than 100MHz

Table 2 – General Population / Uncontrolled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS 102 issue 4 – 2010
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
30 – 300	0.2				*2.0
10 – 400		2.0			
100 – 300			0.2		
100 – 400				2.0	
300 – 1,500	f/1,500				f/150
400 – 2,000		f/200		f/200	
300 – 15,000			f/1,500		
1,500 – 15,000					10.0
1,500 – 100,000	1.0				
2,000 – 100,000				10.0	
2,000 – 300,000		10.0			

*Power density limit is applicable at frequencies greater than 100MHz

5.0 N_c Test Channels

The number of test channels are determined by using Equation 1 below. This equation is available in FCC’s KDB 447498. The test channels are appropriately spaced across the antenna’s frequency range.

Equation 1 – Number of test channels

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where N_c is the number of test channels, f_{high} and f_{low} are the highest and lowest frequencies within the transmission band, f_c is the mid-band frequency, and frequencies are in MHz.

6.0 Measurement Equipment

Table 3 - Equipment

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Automobile	2003 Ford Crown Victoria, 4-Door	NA	NA	NA
Survey Meter Probe – E-Field	ETS Model HI-2200 ETS Model E100	00086316 00109011	08/15/2012	08/15/2013

Power density measurements made with E-Field meter are in mW/cm².

7.0 Measurement System Uncertainty Levels

Table 4 - Uncertainty Budget for Near Field Probe Measurements

	Tol. (± %)	Prob. Dist.	Divisor	u_i (±%)	v_i
Measurement System					
Probe Calibration	6.0	N	1.00	6.0	∞
Survey Meter Calibration	3.0	N	1.00	3.0	∞
Hemispherical Isotropy	8.0	R	1.73	4.6	∞
Linearity	5.0	R	1.73	2.9	∞
Pulse Response	1.0	R	1.73	0.6	∞
RF Ambient Noise	3.0	R	1.73	1.7	∞
RF Reflections	8.0	R	1.73	4.6	∞
Probe Positioning	10.0	R	1.73	5.8	∞
Test sample Related					
Antenna Positioning	3.0	N	1.00	3.0	∞
Power drift	5.0	R	1.73	2.9	∞
Combined Standard Uncertainty		RSS		12.2	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)		$k=2$		24	

8.0 Product and System Description

Model M22QSS9PW1AN is a mobile transceiver that utilizes analog, APCO 25 & F2 digital two-way radio communications. The analog modulation scheme uses Frequency Modulation (FM). APCO 25 & F2 digital modes use C4FM of CQPSK family of modulation (Compatible 4-Level Frequency Modulation of Compatible Quadrature Phase Shift Keying). F2 is a TDMA 1:2 protocol that allocates portions of the RF signal by dividing time into two slots (2 slots TDMA). Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. This product supports voice in analog mode, and both voice and data modes in digital mode.

The maximum duty cycle for TDMA is 1:2 (50%) and is controlled by software. The FM signal is continuous. However, because of hand shaking or Push-To-Talk (PTT) between users and/or base stations a conservative 50% duty cycle is applied. The TDMA mode was not tested because its duty cycle is inherently 50% and would include an additional 50% duty cycle for PTT.

The intended use of the radio is PTT while the device is properly installed in a vehicle with an external antenna mounted at the roof or trunk.

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the passengers inside the vehicle and the bystanders external to the vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that "Bystanders" as used herein are people other than operator)

9.0 Additional Options and Accessories

Refer to Table 5 for complete list of tested antennas.

10.0 Test Set-Up Description

Assessments were performed with mobile radio installed in the test vehicle while engine was at idle, at the specified distances and test locations indicated in sections 11.0, 12.0 and Appendix A.

All antennas described in Table 5 were considered in order to develop the test plan for this product. Antennas were installed and tested per their appropriate mount locations (Roof / Trunk) and defined test channels.

11.0 Method of Measurement with trunk mounted antenna(s)

11.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the trunk. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2 m vertical line for each of the (3) bystander test locations indicated in Appendix A with 20 cm height increments, with antenna to probe sensor separation distances of 90 cm directly behind vehicle (380 – 470 MHz), 104 cm (45 degree radial) and 110.5 cm (90 degree radial). The separation distance used for testing is defined from the antenna where as the RF safety booklet defines the same distance from the vehicle body to ensure that the assessment is applicable to other vehicles. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Each of the offered antennas mounted at the center of the trunk were assessed at the rear of the vehicle while maintaining a minimum of twenty (20) centimeter separation distance between the probe sensor and vehicle body. The worst case antenna was then tested at a 45° radial at the corner of the trunk, and 90° radial at the side of the trunk.

Note: The distance from the centered trunk-mounted antenna to the rear edge of the vehicle is 42cm and the distance from the rear edge of the vehicle to the survey probe sensor is 48cm.

11.2 Internal/Passenger vehicle MPE measurements

Antenna is located toward the center of the trunk at a minimum 85cm from backseat passenger. Users are instructed, per installation manual, to mount antennas on the roof only if a minimum 85cm cannot be achieved. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed.

For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

12.0 Method of Measurement with roof mounted antenna(s)

12.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the test location indicated in Appendix A with 20cm increments at the test distance of 117cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Note: Actual test distance was approximately 117cm from centered roof-mounted antenna to the probe element (97cm from antenna to edge of car door and 20cm from the edge of the car door to the survey probe sensor); this is the closest distance that can be achieved to a centered roof-mounted antenna used for MPE compliance assessment herein.

12.2 Internal/Passenger vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

13.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0 Tables 6 - 9. These results are based on 50% duty cycle for PTT.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations.

External to vehicle (Bystander) - 10 measurements are averaged over the body (*Avg_over_body*).
 Internal to vehicle (Passengers) - 3 measurements are averaged over the body (*Avg_over_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

Equation 2 – Power Density Calculation (*Calc._P.D.*)

$$Calc._P.D. = (Avg_over_body) * (probe_frequency_cal_factor) * (duty_cycle)$$

Note 1: The highest “average” cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine “probe_frequency_cal_factor” for the specific test frequencies.

Note 2: The E-field probe calibration certificate’s frequency cal factors were determined by measuring V/m. The survey meter’s results were measured in power density (mW/cm^2) and therefore the “probe_frequency_cal_factor” was squared in equation 2 to account for these results.

Note 3: The H-field probe calibration certificate’s frequency cal factors were determined by measuring A/m. The survey meter’s results were measured in A/m and therefore the “Avg_over_body” A/m results were converted to power density (mW/cm^2) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.

Equation 3 – Converting A/m to mW/cm^2

$$mW / cm^2 = (A / m)^2 * 37.699$$

Equation 4 – Power Density Maximum Calculation

$$Max_Calc._P.D. = P.D._calc * \frac{max_output_power}{initial_output_power}$$

Note 4: For initial output power > max_output_power; max_output_power / initial output power = 1

14.0 Antenna Summary

Table 5 below summarizes the tested antennas and their descriptions, mount location (roof/trunk), overlap of FCC bands, number of test channels per FCC KDB 447498 (FCC N_c) and actual number of tested channels (Actual N_c). This information was used to determine the test configurations presented in this report.

Table 5

#	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Mount Location (Roof/Trunk)	Overlap FCC Bands	FCC N _c	Actual N _c
1	HAE6012A	380-433	18.2	2.15	1/4 wave, wire	R	406.1-433	3	5
2	HAE6010A	380-433	63.5	5.65	1/2 wave, wire	R/T	406.1-433	3	5
3	HAE6011A	380-433	91	7.15	5/8 wave, wire	R/T	406.1-433	3	5
4	HAE4003A	450-470	16.0	2.15	1/4 wave, wire	R	450-470	3	3
5	*RAE4014ARB	445-470	92.7 90.5 89.0	7.15	5/8 wave, wire	R/T	450-470	3	3
6	HAE4011A	450-470	73.2	5.65	1/2 wave, wire	R/T	450-470	3	3
7	HAE6013A	380-470	29.0	4.15	1/2 wave, wire	R/T	406.1-470	5	7
8	HAE6031A	380-520	28.0	4.15	1/2 wave, wire	R/T	406.1-470	5	7

* Antennas trimmed per test frequency.

15.0 Test Results Summary

The following tables below summarize the MPE results for each test configuration: antenna location, test positions (BS-Bystander, PB-Passenger Backseat, PF-Passenger Front seat), E/H field measurements, angle, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/IEEE/ICNIRP specification limits and % of the applicable specification limits.

Table 6
Bystander MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	BS	E	0	HAE6010A (380-433MHz)	48	47.3	380	0.09	0.25	36	0.20	46
						47.2	393.1	0.10	0.26	38	0.20	50
						47.2	406.125	0.10	0.27	36	0.20	48
						47.4	419.6	0.10	0.28	34	0.21	45
						47.4	433	0.10	0.29	34	0.22	45
				HAE6011A (380-433MHz)	48	47.3	380	0.09	0.25	35	0.20	45
						47.2	393.1	0.10	0.26	39	0.20	51
						47.2	406.125	0.09	0.27	34	0.20	45
						47.4	419.6	0.08	0.28	28	0.21	37
						47.4	433	0.06	0.29	20	0.22	27
				HAE4011A (450-470MHz)	48	46.9	450.0125	0.11	0.30	35	0.23	47
						46.8	460.0125	0.10	0.31	32	0.23	43
						47.3	470	0.07	0.31	24	0.24	32
				RAE4014ARB (445 - 470MHz)	48	47.3	445	0.07	0.30	22	0.22	30
						47.2	457.5	0.09	0.31	28	0.23	38
						47.3	470	0.09	0.31	30	0.24	40
				HAE6013A (380 - 470MHz)	48	47.3	380	0.12	0.25	46	0.20	58
						47.2	393.1	0.11	0.26	44	0.20	57
						47.2	406.125	0.12	0.27	44	0.20	59
						47.3	422.1	0.15	0.28	53	0.21	71
						47.6	438.1	0.16	0.29	54	0.22	72
						47.1	453.9875	0.13	0.30	43	0.23	58
						47.3	470	0.11	0.31	35	0.24	47

Table 6 (continued)
Bystander MPE assessment to for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	BS	E	0	HAE6031A (380-520MHz)	48	47.3	380	0.13	0.25	50	0.20	63
						47.2	393.1	0.12	0.26	45	0.20	60
						47.2	406.125	0.12	0.27	43	0.20	58
						47.3	422.1	0.15	0.28	52	0.21	70
						47.6	438.1	0.16	0.29	56	0.22	74
						47.1	453.9875	0.14	0.30	47	0.23	63
						47.3	470	0.14	0.31	44	0.24	59
WC 45												
Trunk	BS	E	45	HAE6031A (380-520MHz)	48	47.6	438.1	0.12	0.29	42	0.22	56
WC 90												
Trunk	BS	E	90	HAE6031A (380-520MHz)	48	47.6	438.1	0.11	0.29	38	0.22	51

Table 7
Passenger MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	PB	E	NA	HAE6010A (380-433MHz)	48	47.3	380	0.20	0.25	81	0.20	102
						47.2	393.1	0.19	0.26	74	0.20	97
						47.2	406.125	0.24	0.27	89	0.20	118
						47.4	419.6	0.14	0.28	51	0.21	68
						47.4	433	0.11	0.29	40	0.22	53
				HAE6011A (380-433MHz)	48	47.3	380	0.12	0.25	47	0.20	59
						47.2	393.1	0.16	0.26	62	0.20	81
						47.2	406.125	0.19	0.27	69	0.20	92
						47.4	419.6	0.11	0.28	41	0.21	54
						47.4	433	0.05	0.29	18	0.22	24
				HAE4011A (450-470MHz)	48	46.9	450.0125	0.22	0.30	74	0.23	98
						46.8	460.0125	0.19	0.31	62	0.23	83
						47.3	470	0.13	0.31	41	0.24	55
				RAE4014ARB (445 - 470MHz)	48	47.3	445	0.05	0.30	18	0.22	24
						47.2	457.5	0.10	0.31	33	0.23	44
						47.3	470	0.10	0.31	32	0.24	42
				HAE6013A (380-470MHz)	48	47.3	380	0.26	0.25	104*	0.20	131
						47.2	393.1	0.29	0.26	110*	0.20	144
						47.2	406.125	0.36	0.27	133*	0.20	177
						47.3	422.1	0.27	0.28	96	0.21	128
						47.6	438.1	0.26	0.29	89	0.22	119
47.1	453.9875	0.28	0.30			93	0.23	124				
47.3	470	0.22	0.31			71	0.24	94				

* Test configuration exceeds MPE FCC spec limit.

Table 7 (continued)

Passenger MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Trunk	PB	E	NA	HAE6031A (380-520MHz)	48	47.3	380	0.31	0.25	124*	0.20	157
						47.2	393.1	0.30	0.26	116*	0.20	151
						47.2	406.125	0.30	0.27	112*	0.20	150
						47.3	422.1	0.29	0.28	105*	0.21	139
						47.6	438.1	0.27	0.29	91	0.22	121
						47.1	453.9875	0.32	0.30	104*	0.23	139
						47.3	470	0.27	0.31	87	0.24	116
	PF	E	NA	HAE6010A (380-433MHz)	48	47.3	380	0.08	0.25	31	0.20	39
						47.2	393.1	0.10	0.26	39	0.20	51
						47.2	406.125	0.09	0.27	32	0.20	43
						47.4	419.6	0.05	0.28	19	0.21	26
						47.4	433	0.03	0.29	10	0.22	13
				HAE6011A (380-433MHz)	48	47.3	380	0.03	0.25	12	0.20	15
						47.2	393.1	0.07	0.26	25	0.20	33
						47.2	406.125	0.06	0.27	22	0.20	30
						47.4	419.6	0.03	0.28	9	0.21	13
						47.4	433	0.01	0.29	5	0.22	6

* Test configuration exceeds MPE FCC spec limit.

Table 7 (continued)

Passenger MPE assessment for trunk mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	Spec Limit	% To ICNIRP Limit	% To ICNIRP Spec Limit			
Trunk	PF	E	NA	HAE4011A (450-470MHz)	48	46.9	450.0125	0.05	0.30	17	0.23	23			
						46.8	460.0125	0.07	0.31	22	0.23	29			
						47.3	470	0.04	0.31	14	0.24	19			
				RAE4014ARB (445 - 470MHz)	48	47.3	445	0.02	0.30	5	0.22	7			
						47.2	457.5	0.04	0.31	12	0.23	16			
						47.3	470	0.03	0.31	10	0.24	13			
				HAE6013A (380 - 470MHz)	48	47.3	380	0.11	0.25	42	0.20	53			
						47.2	393.1	0.13	0.26	48	0.20	63			
						47.2	406.125	0.13	0.27	48	0.20	64			
						47.3	422.1	0.06	0.28	20	0.21	26			
						47.6	438.1	0.07	0.29	24	0.22	31			
						47.1	453.9875	0.11	0.30	38	0.23	50			
						47.3	470	0.07	0.31	23	0.24	31			
				HAE6031A (380 - 520MHz)	48	47.3	380	0.12	0.25	46	0.20	58			
						47.2	393.1	0.13	0.26	51	0.20	67			
						47.2	406.125	0.12	0.27	44	0.20	59			
						47.3	422.1	0.06	0.28	23	0.21	31			
						47.6	438.1	0.07	0.29	23	0.22	31			
47.1	453.9875	0.12	0.30			40	0.23	54							
47.3	470	0.10	0.31			32	0.24	43							

Table 8

Bystander MPE assessment for roof mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Roof	BS	E	NA	HAE6012A (380-433 MHz)	48	47.3	380	0.06	0.25	24	0.20	31
						47.2	393.1	0.06	0.26	23	0.20	30
						47.2	406.125	0.07	0.27	25	0.20	33
						47.4	419.6	0.06	0.28	21	0.21	29
						47.4	433	0.06	0.29	21	0.22	28
				HAE6010A (380-433MHz)	48	47.3	380	0.03	0.25	12	0.20	15
						47.2	393.1	0.03	0.26	12	0.20	15
						47.2	406.125	0.04	0.27	13	0.20	18
						47.4	419.6	0.04	0.28	13	0.21	17
						47.4	433	0.03	0.29	11	0.22	15
				HAE6011A (380-433MHz)	48	47.3	380	0.04	0.25	16	0.20	20
						47.2	393.1	0.05	0.26	19	0.20	26
						47.2	406.125	0.05	0.27	18	0.20	24
						47.4	419.6	0.04	0.28	14	0.21	18
						47.4	433	0.03	0.29	10	0.22	13
				HAE4003A (450-470MHz)	48	46.9	450.0125	0.07	0.30	23	0.23	31
						46.8	460.0125	0.08	0.31	24	0.23	33
						47.3	470	0.07	0.31	21	0.24	29
				HAE4011A (450-470MHz)	48	46.9	450.0125	0.06	0.30	20	0.23	27
						46.8	460.0125	0.06	0.31	19	0.23	26
47.3	470	0.04	0.31			14	0.24	18				

Table 8 (continued)

Bystander MPE assessment for roofmounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit			
Roof	BS	E	NA	RAE4014ARB (445 - 470MHz)	48	47.3	445	0.04	0.30	12	0.22	16			
						47.2	457.5	0.04	0.31	14	0.23	19			
						47.3	470	0.05	0.31	15	0.24	20			
				HAE6013A (380 - 470MHz)	48	47.3	380	0.05	0.25	21	0.20	27			
						47.2	393.1	0.06	0.26	22	0.20	29			
						47.2	406.125	0.07	0.27	26	0.20	35			
						47.3	422.1	0.07	0.28	24	0.21	32			
						47.6	438.1	0.07	0.29	25	0.22	33			
						47.1	453.9875	0.07	0.30	21	0.23	29			
						47.3	470	0.06	0.31	20	0.24	26			
				HAE6031A (380 - 520MHz)	48	47.3	380	0.06	0.25	24	0.20	31			
						47.2	393.1	0.06	0.26	22	0.20	29			
						47.2	406.125	0.07	0.27	26	0.20	34			
						47.3	422.1	0.07	0.28	24	0.21	31			
						47.6	438.1	0.07	0.29	25	0.22	34			
						47.1	453.9875	0.07	0.30	23	0.23	31			
						47.3	470	0.07	0.31	23	0.24	31			

Table 9
Passenger MPE assessment for roofmounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit
Roof	PB	E	NA	HAE6012A (380-433 MHz)	48	47.3	380	0.04	0.25	15	0.20	19
						47.2	393.1	0.05	0.26	19	0.20	25
						47.2	406.125	0.07	0.27	26	0.20	34
						47.4	419.6	0.04	0.28	14	0.21	19
						47.4	433	0.03	0.29	9	0.22	12
				HAE6010A (380-433MHz)	48	47.3	380	0.03	0.25	12	0.20	15
						47.2	393.1	0.06	0.26	23	0.20	31
						47.2	406.125	0.08	0.27	29	0.20	39
						47.4	419.6	0.04	0.28	15	0.21	20
						47.4	433	0.03	0.29	10	0.22	13
				HAE6011A (380-433MHz)	48	47.3	380	0.00	0.25	2	0.20	2
						47.2	393.1	0.01	0.26	3	0.20	4
						47.2	406.125	0.01	0.27	5	0.20	6
						47.4	419.6	0.01	0.28	3	0.21	4
						47.4	433	0.00	0.29	1	0.22	1
				HAE4003A (450-470MHz)	48	46.9	450.0125	0.05	0.30	16	0.23	21
						46.8	460.0125	0.03	0.31	9	0.23	12
						47.3	470	0.03	0.31	8	0.24	11
				HAE4011A (450-470MHz)	48	46.9	450.0125	0.01	0.30	3	0.23	4
						46.8	460.0125	0.01	0.31	2	0.23	3
						47.3	470	0.00	0.31	1	0.24	2
				RAE4014ARB (445 - 470MHz)	48	47.3	445	0.01	0.30	2	0.22	3
						47.2	457.5	0.00	0.31	2	0.23	2
						47.3	470	0.00	0.31	2	0.24	2

Table 9 (continued)

Passenger MPE assessment for roof mounted antennas

Trunk/ Roof	Test Position	E/H Field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC Limit	Spec Limit	% To ICNIRP Limit	% To ICNIRP Spec Limit
Roof	PF	E	NA	HAE6011A (380-433MHz)	48	47.3	380	0.01	0.25	2	0.20	3
						47.2	393.1	0.01	0.26	2	0.20	3
						47.2	406.125	0.01	0.27	3	0.20	4
						47.4	419.6	0.00	0.28	1	0.21	1
						47.4	433	0.00	0.29	1	0.22	1
				HAE4003A (450-470MHz)	48	46.9	450.0125	0.03	0.30	9	0.23	11
						46.8	460.0125	0.04	0.31	13	0.23	17
						47.3	470	0.03	0.31	8	0.24	11
				HAE4011A (450-470MHz)	48	46.9	450.0125	0.01	0.30	2	0.23	2
						46.8	460.0125	0.01	0.31	3	0.23	4
						47.3	470	0.01	0.31	2	0.24	3
				RAE4014ARB (445 - 470MHz)	48	47.3	445	0.00	0.30	1	0.22	2
						47.2	457.5	0.01	0.31	2	0.23	3
						47.3	470	0.01	0.31	2	0.24	3
				HAE6013A (380 - 470MHz)	48	47.3	380	0.03	0.25	11	0.20	14
						47.2	393.1	0.03	0.26	13	0.20	17
						47.2	406.125	0.04	0.27	16	0.20	21
						47.3	422.1	0.02	0.28	6	0.21	7
						47.6	438.1	0.03	0.29	10	0.22	13
						47.1	453.9875	0.03	0.30	11	0.23	15
						47.3	470	0.03	0.31	8	0.24	11
				HAE6031A (380 - 520MHz)	48	47.3	380	0.03	0.25	12	0.20	15
						47.2	393.1	0.04	0.26	15	0.20	20
						47.2	406.125	0.05	0.27	19	0.20	25
						47.3	422.1	0.01	0.28	5	0.21	7
						47.6	438.1	0.02	0.29	7	0.22	10
						47.1	453.9875	0.03	0.30	10	0.23	14
						47.3	470	0.03	0.31	11	0.24	14

16.0 Conclusion

The assessments for this device were performed with an output power range as indicated in section 15.0 Tables 6 - 9. The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification of 48W. The highest power density results for the mobile device scaled to the maximum allowable power output are indicated in the Tables 10 and 11 for internal/passenger to the vehicle, and external/bystander to the vehicle.

Table 10: Maximum MPE RF Exposure Summary

Designator	Frequency (MHz)	Passenger (mW/cm ²)	Bystander (mW/cm ²)
Overall	380-470	*0.36	0.16
FCC	406 - 470	*0.36	0.16
IC	406 – 430 450 - 470	*0.36	0.15

These MPE results herein demonstrate compliance to the FCC/IEEE Occupational/Controlled Exposure limit. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits. Although MPE is a convenient method of demonstrating compliance, SAR is recognized as the "basic restriction". For those configurations exceeding the MPE limit noted * in section 15 Tables 6 thru 9, compliance to the FCC SAR General Population/ Uncontrolled limit of 1.6mW/g is demonstrated in Appendix E via SAR computational analysis.


The computational results show that this device, when used with the offered antennas in accordance with the user manual instructions, exhibits the maximum average SAR values as indicated in the table below.

Table 11: Maximum Average SAR Summary


Designator	Frequency (MHz)	SAR 1g (mW/g)	SAR 10g (mW/g)
Overall/FCC/IC	406.125	0.42	0.29
FCC	406.125	0.42	0.29
IC	406.125	0.42	0.29

Appendix A - Illustration of Antenna Locations and Test Distances

90cm Trunk Distance

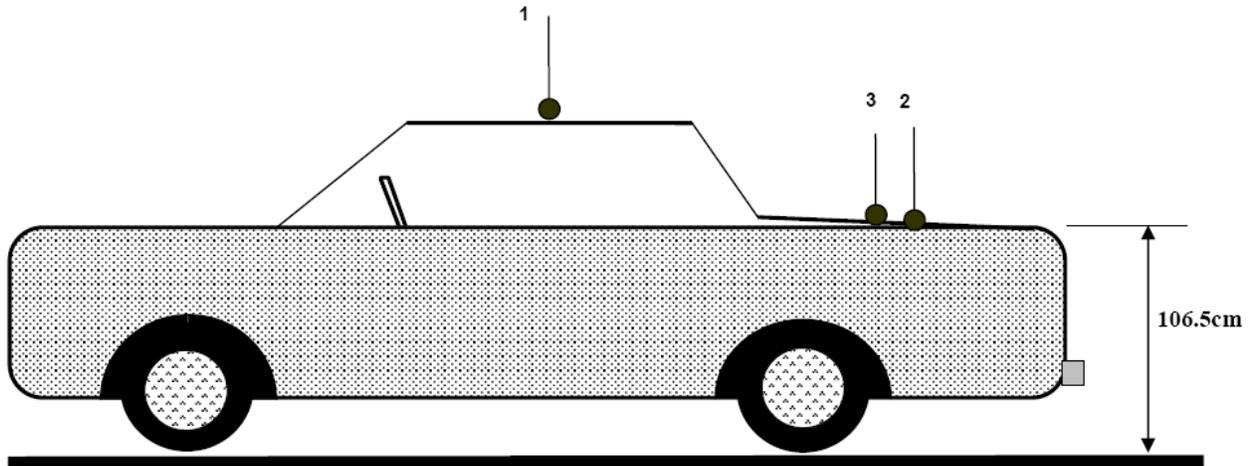

- 1 - Roof (center)
- 2 - Trunk (center)
- 3 - Trunk (85cm from back of the back seat)

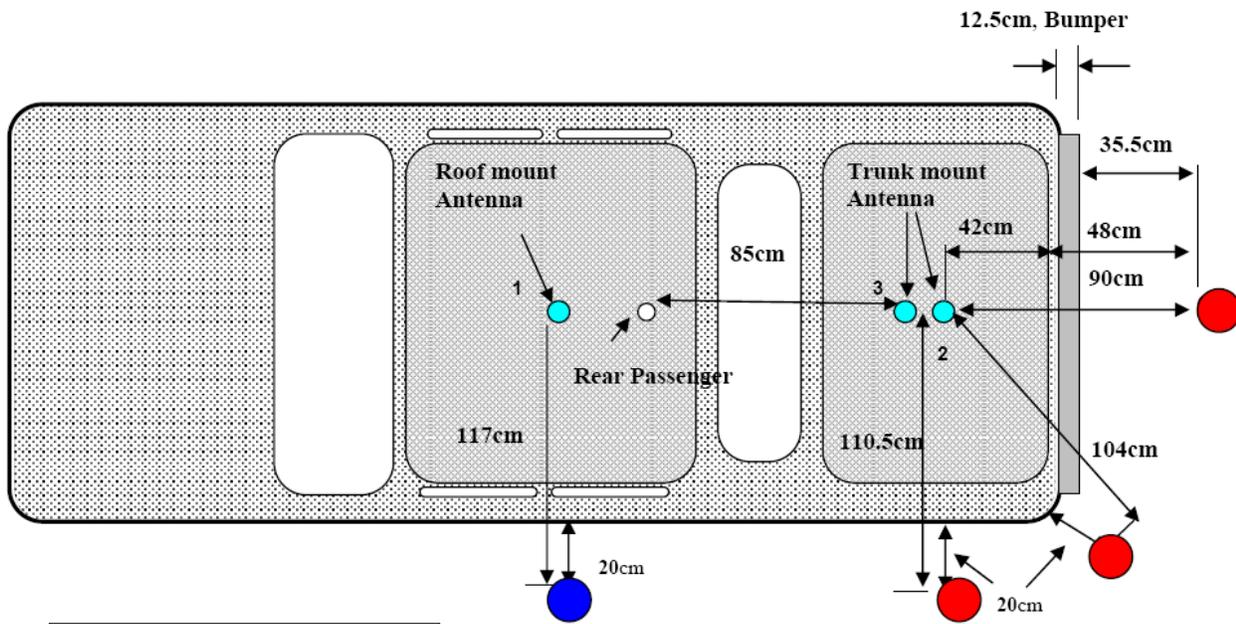

By-Stander Test Locations


- Roof Mount
- Trunk Mount

Note: The distance from the centered trunk-mounted antenna to the edge of the vehicle is 42cm and the distance from the edge of the vehicle to the survey probe sensor is 48cm.

Seat scan areas
(Applicable to both front and back seats)

Meter - Probe

 Probe diameter is 5.5cm

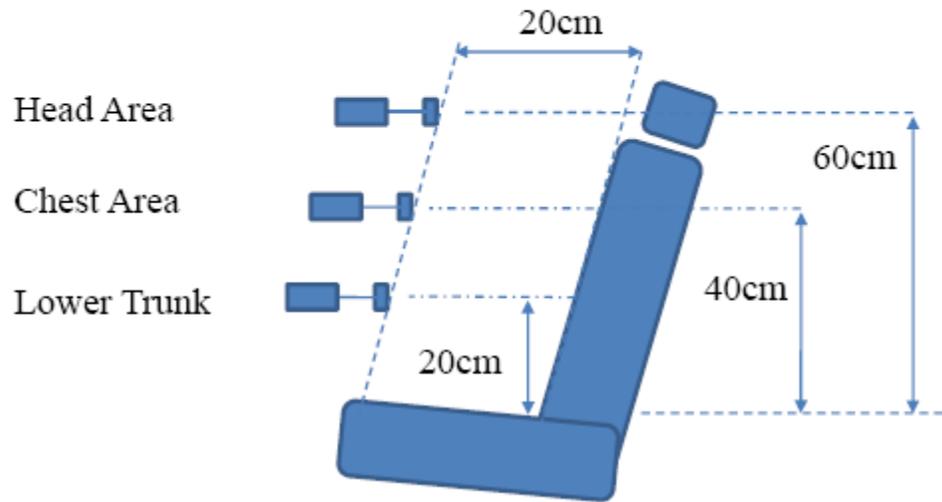

Appendix B - Probe Calibration Certificates

Service Test Report
QAF 1126, 03/11
Report ID: 92746



Certificate of Test Conformance
Page 1 of 1

Reference: S 000025310
Customer: LOCKHEED MARTIN (MS)

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Not Applicable. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994 using ETS-Lindgren Quality Management System internal procedures.

<u>Manufacturer</u>	ETS-Lindgren	<u>Status In</u>	In Tolerance
<u>Instrument Type</u>	RF Survey Meter	<u>Date Completed</u>	15-Aug-12
<u>Model</u>	HI-2200	<u>Status Out</u>	Compliant with Internal Quality Standards
<u>Serial Number/ID</u>	00086316		

Remarks
Functional test performed.

I would like to take this opportunity to express our appreciation for using ETS-Lindgren for your EMI test equipment services and I am looking forward to continued business with your organization. Please feel free to contact our offices at (512) 531-6400, if you have any questions regarding this report.

Sincerely,


Terry D. O'Neill
Calibration Manager

Date Attested: 15-Aug-12



Cert I.D.: 92745

Certificate of Calibration Conformance
Page 1 of 3

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	100kHz - 5GHz
Model Number:	E100	Instrument Type:	Isotropic Probe > 1 GHz
Serial Number/ ID:	00109011	Date Code:	
Tracking Number:	S 000025310	Alternate ID:	
Date Completed:	15-Aug-12	Customer:	LOCKHEED MARTIN (MS)
Test Type:	Standard Field, Field Strength		
Calibration Uncertainty:	Std Field Method	10kHz - 18000 MHz, +/-0.7 dB, 26.5GHz - 40GHz, +/- 0.95 dB	
k=2, (95% Confidence Level)			

Test Remarks: Special Calibration - Additional frequency points provided per customer request. Probe calibrated with HI-2200 s/n 00086316.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994.

Standards and Equipment Used:

Make / Model / Name / S/N / Recall Date					Condition of Instrument Upon Receipt:
Agilent/HP	8648C	Signal Generator	3623A03573	01-Feb-13	In Tolerance to Internal Quality Standards
Agilent	E4419B	Power Meter	MY45104171	29-Sep-12	
Agilent/HP	8648C	Signal Generator	3847A04406	01-Feb-13	On Release:
Agilent	E4419B	Power Meter	MY45103242	01-Feb-13	
Rohde & Schwarz	857.8008.02	Power Meter NRVD	100451	28-Mar-13	
Hewlett Packard	83620B	Signal Generator	3722A00541	01-Feb-13	
Rohde & Schwarz	SMB 100A	Signal Generator	101558	14-Mar-13	

Calibration Completed By
 George Cisneros, Calibration Technician

Attested and Issued on 15-Aug-12
 Terry D. O'Neill, Calibration Manager

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994. QAF 1127 (03/11)

CALIBRATION REPORT

Electric Field Sensor

<i>Model</i>	<i>S/N</i>
E100	00109011
HI-2200	00086316

Date: 15 Aug 2012

- New Instrument
- Other
- Out of Tolerance
- Within Tolerance

Frequency Response

<i>Frequency Response</i>	<i>Nominal Field</i>	<i>Cal Factor*</i>	<i>Deviation</i>	
<i>MHz</i>	<i>V/m</i>	<i>(Eapplied/Eindicated)</i>	<i>dB</i>	
1	1	20	1.04	-0.33
2	15	20	1.00	0.03
3	30	20	1.00	0.03
4	75	20	1.00	0.04
5	100	20	0.99	0.07
6	150	20	0.98	0.14
7	200	20	0.96	0.38
8	250	20	0.97	0.25
9	300	20	0.97	0.28
10	400	20	0.97	0.26
11	500	20	1.00	-0.02
12	600	20	1.05	-0.44
13	700	20	1.07	-0.55
14	800	20	1.04	-0.37
15	900	20	1.03	-0.28
16	1000	20	0.96	0.36
17	2000	20	0.99	0.07
18	2450	20	1.01	-0.06
19	3000	20	1.03	-0.22
20	3500	20	0.99	0.10
21	4000	20	1.00	-0.01
22	5000	20	1.28	-2.14
23	5500	20	1.31	-2.35
24	6000	20	1.32	-2.43

* Corrected electric field values (V/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

Linearity

maximum linearity deviation is 0.1 dB
 (measurements taken from 0.3 V/m to 800 V/m at 27.12 MHz)

Test Conditions

Calibration performed at ambient room temperature: 23 ±3°C



PROBE ROTATIONAL RESPONSE

Model E100
S/N 00109011
Date Date of Calibration 15 August 2012
Time 03:54:44 PM
Isotropy * + 0.272 dB/ -0.272 dB

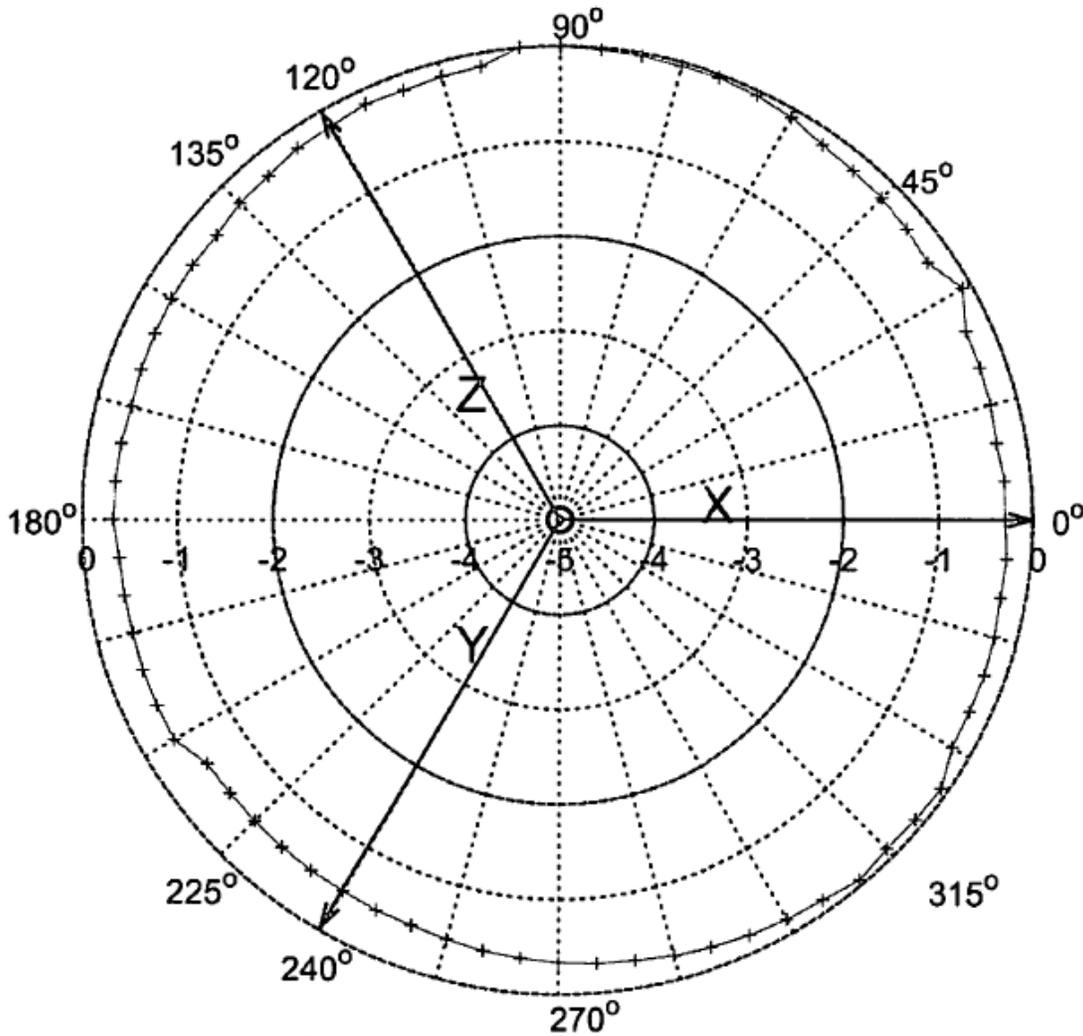


Figure 1: Probe Isotropic Response Chart.

Isotropic response is measured in a 20 V/m field at 400 MHz

*Isotropy is the maximum deviation from the geometric mean as defined by IEEE 1309-2005.

Appendix C - Photos of Assessed Antennas
(Refer to Exhibit 7B)

Appendix D – MPE Measurement Results

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions									DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)	
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm					200 cm
Trunk	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94	BS	0.132	0.107	0.203	0.194	0.187	0.109	0.086	0.199	0.342	0.362	0.5	0.192	0.090	0.09
Trunk	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	BS	0.149	0.104	0.147	0.144	0.193	0.093	0.104	0.259	0.441	0.465	0.5	0.210	0.099	0.10
Trunk	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	BS	0.135	0.078	0.127	0.155	0.242	0.119	0.096	0.230	0.419	0.442	0.5	0.204	0.096	0.10
Trunk	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	BS	0.120	0.054	0.122	0.217	0.330	0.156	0.090	0.182	0.341	0.359	0.5	0.197	0.094	0.10
Trunk	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	BS	0.119	0.050	0.162	0.249	0.386	0.183	0.114	0.158	0.275	0.294	0.5	0.199	0.096	0.10
Trunk	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	BS	0.014	0.007	0.025	0.061	0.157	0.371	0.550	0.420	0.175	0.091	0.5	0.187	0.088	0.09
Trunk	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	BS	0.023	0.037	0.045	0.049	0.148	0.429	0.631	0.474	0.205	0.102	0.5	0.214	0.101	0.10
Trunk	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	BS	0.024	0.017	0.036	0.049	0.113	0.393	0.571	0.434	0.169	0.084	0.5	0.189	0.089	0.09
Trunk	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	BS	0.026	0.013	0.021	0.027	0.120	0.345	0.496	0.380	0.141	0.058	0.5	0.163	0.077	0.08
Trunk	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	BS	0.019	0.012	0.024	0.032	0.084	0.259	0.348	0.275	0.103	0.032	0.5	0.119	0.057	0.06
Trunk	HAE4011A (450-470MHz)	5.65	450.125	48	46.9	CW	E	0.97	BS	0.004	0.008	0.019	0.070	0.286	0.578	0.601	0.337	0.099	0.132	0.5	0.213	0.103	0.11
Trunk	HAE4011A (450-470MHz)	5.65	460.125	48	46.8	CW	E	0.98	BS	0.007	0.008	0.024	0.066	0.258	0.518	0.558	0.327	0.097	0.101	0.5	0.196	0.096	0.10
Trunk	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	BS	0.006	0.009	0.024	0.053	0.189	0.370	0.414	0.248	0.085	0.106	0.5	0.150	0.074	0.07
Trunk	RAE4014ARB (445-470MHz)	7.15	445	48	47.3	CW	E	0.97	BS	0.020	0.009	0.018	0.013	0.040	0.268	0.425	0.336	0.120	0.101	0.5	0.135	0.065	0.07
Trunk	RAE4014ARB (445-470MHz)	7.15	457.5	48	47.2	CW	E	0.97	BS	0.020	0.014	0.028	0.035	0.094	0.341	0.531	0.455	0.175	0.059	0.5	0.175	0.085	0.09
Trunk	RAE4014ARB (445-470MHz)	7.15	470	48	47.3	CW	E	0.98	BS	0.016	0.021	0.033	0.052	0.147	0.377	0.539	0.455	0.193	0.061	0.5	0.189	0.093	0.09

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Trunk	HAE6013A (380-470MHz)	4.15	380	48	47.3	CW	E	0.94	BS	0.096	0.091	0.164	0.203	0.298	0.396	0.417	0.354	0.252	0.152	0.5	0.242	0.114	0.12
Trunk	HAE6013A (380-470MHz)	4.15	393.1	48	47.2	CW	E	0.94	BS	0.107	0.088	0.125	0.146	0.270	0.385	0.427	0.384	0.278	0.181	0.5	0.239	0.112	0.11
Trunk	HAE6013A (380-470MHz)	4.15	406.125	48	47.2	CW	E	0.94	BS	0.094	0.058	0.104	0.146	0.332	0.476	0.490	0.400	0.250	0.142	0.5	0.249	0.118	0.12
Trunk	HAE6013A (380-470MHz)	4.15	422.1	48	47.3	CW	E	0.95	BS	0.094	0.052	0.127	0.201	0.467	0.612	0.628	0.495	0.282	0.150	0.5	0.311	0.148	0.15
Trunk	HAE6013A (380-470MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.085	0.053	0.129	0.204	0.453	0.603	0.654	0.540	0.343	0.201	0.5	0.327	0.157	0.16
Trunk	HAE6013A (380-470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	BS	0.050	0.045	0.123	0.215	0.419	0.513	0.526	0.389	0.232	0.137	0.5	0.265	0.128	0.13
Trunk	HAE6013A (380-470MHz)	4.15	470	48	47.3	CW	E	0.98	BS	0.037	0.050	0.111	0.196	0.332	0.419	0.422	0.319	0.213	0.135	0.5	0.223	0.109	0.11
Trunk	HAE6031A (380-520MHz)	4.15	380	48	47.3	CW	E	0.94	BS	0.108	0.097	0.184	0.222	0.318	0.435	0.458	0.391	0.275	0.170	0.5	0.266	0.125	0.13
Trunk	HAE6031A (380-520MHz)	4.15	393.1	48	47.2	CW	E	0.94	BS	0.112	0.092	0.131	0.151	0.290	0.402	0.432	0.393	0.290	0.195	0.5	0.249	0.117	0.12
Trunk	HAE6031A (380-520MHz)	4.15	406.125	48	47.2	CW	E	0.94	BS	0.094	0.065	0.107	0.141	0.307	0.461	0.477	0.393	0.250	0.155	0.5	0.245	0.116	0.12
Trunk	HAE6031A (380-520MHz)	4.15	422.1	48	47.3	CW	E	0.95	BS	0.093	0.053	0.123	0.198	0.456	0.612	0.615	0.486	0.273	0.143	0.5	0.305	0.145	0.15
Trunk	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.090	0.050	0.138	0.213	0.460	0.613	0.679	0.564	0.354	0.199	0.5	0.336	0.161	0.16
Trunk	HAE6031A (380-520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	BS	0.057	0.050	0.136	0.243	0.452	0.549	0.574	0.430	0.259	0.154	0.5	0.290	0.141	0.14
Trunk	HAE6031A (380-520MHz)	4.15	470	48	47.3	CW	E	0.98	BS	0.045	0.064	0.138	0.242	0.409	0.511	0.527	0.409	0.264	0.171	0.5	0.278	0.136	0.14
WC 45	(in Part 90)																						
Trunk	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.077	0.051	0.171	0.166	0.318	0.464	0.507	0.390	0.237	0.142	0.5	0.252	0.121	0.12
WC 90	(in Part 90)																						
Trunk	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.094	0.052	0.139	0.101	0.223	0.367	0.483	0.409	0.264	0.160	0.5	0.229	0.110	0.11

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94		PB	0.579	0.433				
Trunk	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	PB	0.402	0.414	0.405	0.5	0.407	0.191	0.19
Trunk	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	PB	0.747	0.323	0.433	0.5	0.501	0.237	0.24
Trunk	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	PB	0.438	0.294	0.150	0.5	0.294	0.140	0.14
Trunk	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	PB	0.339	0.209	0.161	0.5	0.236	0.113	0.11
Trunk	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	PB	0.370	0.218	0.154	0.5	0.247	0.116	0.12
Trunk	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	PB	0.407	0.280	0.327	0.5	0.338	0.159	0.16
Trunk	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	PB	0.562	0.245	0.365	0.5	0.391	0.184	0.19
Trunk	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	PB	0.363	0.239	0.104	0.5	0.235	0.112	0.11
Trunk	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	PB	0.158	0.116	0.048	0.5	0.107	0.052	0.05
Trunk	HAE4011A (450-470MHz)	5.65	450.0125	48	46.9	CW	E	0.97	PB	0.404	0.447	0.484	0.5	0.445	0.216	0.22
Trunk	HAE4011A (450-470MHz)	5.65	460.0125	48	46.8	CW	E	0.98	PB	0.731	0.185	0.224	0.5	0.380	0.186	0.19
Trunk	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	PB	0.330	0.267	0.177	0.5	0.258	0.126	0.13
Trunk	RAE4014ARB (445 - 470MHz)	7.15	445	48	47.3	CW	E	0.97	PB	0.128	0.116	0.081	0.5	0.108	0.053	0.05
Trunk	RAE4014ARB (445 - 470MHz)	7.15	457.5	48	47.2	CW	E	0.97	PB	0.386	0.098	0.131	0.5	0.205	0.099	0.10
Trunk	RAE4014ARB (445 - 470MHz)	7.15	470	48	47.3	CW	E	0.98	PB	0.260	0.228	0.109	0.5	0.199	0.098	0.10

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	HAE6013A (380-470MHz)	4.15	380	48	47.3	CW	E	0.94	PB	0.608	0.667	0.375	0.5	0.550	0.259	0.26
Trunk	HAE6013A (380-470MHz)	4.15	393.1	48	47.2	CW	E	0.94	PB	0.676	0.602	0.529	0.5	0.602	0.283	0.29
Trunk	HAE6013A (380-470MHz)	4.15	406.125	48	47.2	CW	E	0.94	PB	1.101	0.497	0.647	0.5	0.748	0.353	0.36
Trunk	HAE6013A (380-470MHz)	4.15	422.1	48	47.3	CW	E	0.95	PB	0.900	0.590	0.189	0.5	0.560	0.266	0.27
Trunk	HAE6013A (380-470MHz)	4.15	438.1	48	47.6	CW	E	0.96	PB	0.670	0.613	0.335	0.5	0.539	0.259	0.26
Trunk	HAE6013A (380-470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PB	0.751	0.369	0.586	0.5	0.569	0.276	0.28
Trunk	HAE6013A (380-470MHz)	4.15	470	48	47.3	CW	E	0.98	PB	0.590	0.450	0.295	0.5	0.445	0.218	0.22
Trunk	HAE6031A (380-520MHz)	4.15	380	48	47.3	CW	E	0.94	PB	0.749	0.808	0.421	0.5	0.659	0.310	0.31
Trunk	HAE6031A (380-520MHz)	4.15	393.1	48	47.2	CW	E	0.94	PB	0.700	0.648	0.551	0.5	0.633	0.298	0.30
Trunk	HAE6031A (380-520MHz)	4.15	406.125	48	47.2	CW	E	0.94	PB	1.035	0.450	0.415	0.5	0.633	0.299	0.30
Trunk	HAE6031A (380-520MHz)	4.15	422.1	48	47.3	CW	E	0.95	PB	0.992	0.619	0.221	0.5	0.611	0.290	0.29
Trunk	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	PB	0.694	0.687	0.262	0.5	0.548	0.263	0.27
Trunk	HAE6031A (380-520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PB	0.955	0.275	0.687	0.5	0.639	0.310	0.32
Trunk	HAE6031A (380-520MHz)	4.15	470	48	47.3	CW	E	0.98	PB	0.801	0.568	0.277	0.5	0.549	0.269	0.27
Trunk	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94	PF	0.165	0.140	0.184	0.5	0.163	0.077	0.08
Trunk	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	PF	0.123	0.183	0.329	0.5	0.212	0.100	0.10
Trunk	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	PF	0.129	0.119	0.298	0.5	0.182	0.086	0.09
Trunk	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	PF	0.131	0.062	0.145	0.5	0.113	0.054	0.05
Trunk	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	PF	0.053	0.054	0.068	0.5	0.058	0.028	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

Ant Loc.	D.U.T. Info.						Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	Head	Chest	Lower Trunk				
	Trunk	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	PF	0.080	0.048				
Trunk	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	PF	0.109	0.097	0.203	0.5	0.136	0.064	0.07
Trunk	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	PF	0.102	0.080	0.194	0.5	0.125	0.059	0.06
Trunk	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	PF	0.040	0.029	0.096	0.5	0.055	0.026	0.03
Trunk	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	PF	0.020	0.027	0.036	0.5	0.028	0.013	0.01
Trunk	HAE4011A (450-470MHz)	5.65	450.0125	48	46.9	CW	E	0.97	PF	0.070	0.113	0.126	0.5	0.103	0.050	0.05
Trunk	HAE4011A (450-470MHz)	5.65	460.0125	48	46.8	CW	E	0.98	PF	0.096	0.104	0.204	0.5	0.135	0.066	0.07
Trunk	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	PF	0.079	0.079	0.113	0.5	0.090	0.044	0.04
Trunk	RAE4014ARB (445 - 470MHz)	7.15	445	48	47.3	CW	E	0.97	PF	0.029	0.037	0.030	0.5	0.032	0.016	0.02
Trunk	RAE4014ARB (445 - 470MHz)	7.15	457.5	48	47.2	CW	E	0.97	PF	0.059	0.060	0.103	0.5	0.074	0.036	0.04
Trunk	RAE4014ARB (445 - 470MHz)	7.15	470	48	47.3	CW	E	0.98	PF	0.068	0.072	0.047	0.5	0.062	0.031	0.03
Trunk	HAE6013A (380 - 470MHz)	4.15	380	48	47.3	CW	E	0.94	PF	0.232	0.182	0.250	0.5	0.221	0.104	0.11
Trunk	HAE6013A (380 - 470MHz)	4.15	393.1	48	47.2	CW	E	0.94	PF	0.163	0.225	0.408	0.5	0.265	0.125	0.13
Trunk	HAE6013A (380 - 470MHz)	4.15	406.125	48	47.2	CW	E	0.94	PF	0.200	0.155	0.457	0.5	0.271	0.128	0.13
Trunk	HAE6013A (380 - 470MHz)	4.15	422.1	48	47.3	CW	E	0.95	PF	0.131	0.066	0.149	0.5	0.115	0.055	0.06
Trunk	HAE6013A (380 - 470MHz)	4.15	438.1	48	47.6	CW	E	0.96	PF	0.106	0.132	0.188	0.5	0.142	0.068	0.07
Trunk	HAE6013A (380 - 470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PF	0.193	0.185	0.316	0.5	0.231	0.112	0.11
Trunk	HAE6013A (380 - 470MHz)	4.15	470	48	47.3	CW	E	0.98	PF	0.159	0.132	0.153	0.5	0.148	0.073	0.07
Trunk	HAE6031A (380 - 520MHz)	4.15	380	48	47.3	CW	E	0.94	PF	0.267	0.197	0.270	0.5	0.245	0.115	0.12
Trunk	HAE6031A (380 - 520MHz)	4.15	393.1	48	47.2	CW	E	0.94	PF	0.172	0.228	0.438	0.5	0.279	0.131	0.13
Trunk	HAE6031A (380 - 520MHz)	4.15	406.125	48	47.2	CW	E	0.94	PF	0.171	0.159	0.413	0.5	0.248	0.117	0.12
Trunk	HAE6031A (380 - 520MHz)	4.15	422.1	48	47.3	CW	E	0.95	PF	0.141	0.069	0.191	0.5	0.134	0.063	0.06
Trunk	HAE6031A (380 - 520MHz)	4.15	438.1	48	47.6	CW	E	0.96	PF	0.103	0.086	0.233	0.5	0.141	0.068	0.07
Trunk	HAE6031A (380 - 520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PF	0.185	0.186	0.368	0.5	0.246	0.119	0.12
Trunk	HAE6031A (380 - 520MHz)	4.15	470	48	47.3	CW	E	0.98	PF	0.227	0.135	0.250	0.5	0.204	0.100	0.10

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Test Pos.	Bystander (BS) Positions									DUT Max. TX Factor	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	20 cm		40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAE6012A (380-433 MHz)	2.15	380	48	47.3	CW	E	0.94	BS	0.032	0.017	0.046	0.019	0.056	0.092	0.195	0.278	0.288	0.270	0.5	0.129	0.061	0.06
Roof	HAE6012A (380-433 MHz)	2.15	393.1	48	47.2	CW	E	0.94	BS	0.014	0.007	0.021	0.016	0.046	0.096	0.196	0.255	0.287	0.303	0.5	0.124	0.058	0.06
Roof	HAE6012A (380-433 MHz)	2.15	406.125	48	47.2	CW	E	0.94	BS	0.013	0.011	0.022	0.035	0.067	0.113	0.208	0.273	0.332	0.330	0.5	0.140	0.066	0.07
Roof	HAE6012A (380-433 MHz)	2.15	419.6	48	47.4	CW	E	0.95	BS	0.011	0.011	0.019	0.042	0.073	0.146	0.188	0.221	0.264	0.270	0.5	0.125	0.059	0.06
Roof	HAE6012A (380-433 MHz)	2.15	433	48	47.4	CW	E	0.96	BS	0.009	0.010	0.019	0.044	0.074	0.105	0.145	0.217	0.302	0.305	0.5	0.123	0.059	0.06
Roof	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94	BS	0.028	0.014	0.038	0.018	0.048	0.066	0.111	0.109	0.078	0.101	0.5	0.061	0.029	0.03
Roof	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	BS	0.016	0.010	0.027	0.020	0.054	0.100	0.147	0.108	0.059	0.099	0.5	0.064	0.030	0.03
Roof	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	BS	0.020	0.017	0.028	0.045	0.084	0.116	0.158	0.120	0.078	0.089	0.5	0.076	0.036	0.04
Roof	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	BS	0.018	0.013	0.027	0.054	0.085	0.163	0.171	0.112	0.053	0.056	0.5	0.075	0.036	0.04
Roof	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	BS	0.015	0.016	0.029	0.059	0.090	0.132	0.129	0.113	0.059	0.031	0.5	0.067	0.032	0.03
Roof	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	BS	0.001	0.001	0.002	0.001	0.004	0.017	0.071	0.161	0.286	0.293	0.5	0.084	0.039	0.04
Roof	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	BS	0.001	0.001	0.001	0.001	0.002	0.018	0.078	0.203	0.357	0.405	0.5	0.107	0.050	0.05
Roof	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	BS	0.001	0.001	0.003	0.005	0.008	0.021	0.073	0.187	0.356	0.377	0.5	0.103	0.049	0.05
Roof	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	BS	0.001	0.002	0.002	0.004	0.008	0.022	0.059	0.137	0.252	0.298	0.5	0.079	0.037	0.04
Roof	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	BS	0.001	0.001	0.002	0.006	0.007	0.015	0.033	0.096	0.191	0.214	0.5	0.057	0.027	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAE4003A (450-470MHz)	2.15	450.0125	48	46.9	CW	E	0.97	BS	0.006	0.011	0.016	0.050	0.060	0.120	0.190	0.277	0.329	0.352	0.5	0.141	0.068	0.07
Roof	HAE4003A (450-470MHz)	2.15	460.0125	48	46.8	CW	E	0.98	BS	0.007	0.007	0.020	0.050	0.087	0.130	0.179	0.268	0.347	0.400	0.5	0.150	0.073	0.08
Roof	HAE4003A (450-470MHz)	2.15	470	48	47.3	CW	E	0.98	BS	0.003	0.006	0.016	0.045	0.061	0.103	0.164	0.230	0.329	0.397	0.5	0.135	0.066	0.07
Roof	HAE4011A (450-470MHz)	5.65	450.0125	48	46.9	CW	E	0.97	BS	0.001	0.002	0.002	0.011	0.018	0.053	0.122	0.277	0.399	0.354	0.5	0.124	0.060	0.06
Roof	HAE4011A (450-470MHz)	5.65	460.0125	48	46.8	CW	E	0.98	BS	0.001	0.001	0.003	0.009	0.022	0.048	0.111	0.246	0.383	0.350	0.5	0.117	0.058	0.06
Roof	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	BS	0.001	0.001	0.003	0.007	0.013	0.030	0.076	0.170	0.278	0.279	0.5	0.086	0.042	0.04
Roof	RAE4014ARB (445-470MHz)	7.15	445	48	47.3	CW	E	0.97	BS	0.001	0.002	0.003	0.004	0.003	0.003	0.021	0.109	0.262	0.326	0.5	0.073	0.036	0.04
Roof	RAE4014ARB (445-470MHz)	7.15	457.5	48	47.2	CW	E	0.97	BS	0.002	0.002	0.003	0.006	0.006	0.012	0.041	0.127	0.305	0.377	0.5	0.088	0.043	0.04
Roof	RAE4014ARB (445-470MHz)	7.15	470	48	47.3	CW	E	0.98	BS	0.001	0.002	0.004	0.009	0.011	0.016	0.051	0.149	0.334	0.387	0.5	0.096	0.047	0.05
Roof	HAE6013A (380-470MHz)	4.15	380	48	47.3	CW	E	0.94	BS	0.030	0.014	0.044	0.019	0.048	0.085	0.172	0.249	0.249	0.228	0.5	0.114	0.054	0.05
Roof	HAE6013A (380-470MHz)	4.15	393.1	48	47.2	CW	E	0.94	BS	0.015	0.008	0.020	0.014	0.052	0.103	0.204	0.249	0.279	0.266	0.5	0.121	0.057	0.06
Roof	HAE6013A (380-470MHz)	4.15	406.125	48	47.2	CW	E	0.94	BS	0.013	0.010	0.026	0.035	0.072	0.125	0.206	0.297	0.354	0.327	0.5	0.147	0.069	0.07
Roof	HAE6013A (380-470MHz)	4.15	422.1	48	47.3	CW	E	0.95	BS	0.012	0.010	0.018	0.040	0.081	0.151	0.221	0.267	0.311	0.304	0.5	0.142	0.067	0.07
Roof	HAE6013A (380-470MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.010	0.014	0.030	0.053	0.071	0.109	0.184	0.300	0.369	0.365	0.5	0.151	0.072	0.07
Roof	HAE6013A (380-470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	BS	0.006	0.009	0.013	0.038	0.060	0.130	0.192	0.266	0.302	0.300	0.5	0.132	0.064	0.07
Roof	HAE6013A (380-470MHz)	4.15	470	48	47.3	CW	E	0.98	BS	0.003	0.007	0.014	0.045	0.066	0.097	0.158	0.212	0.279	0.371	0.5	0.125	0.061	0.06

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	Bystander (BS) Positions									DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)	
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm					200 cm
Roof	HAE6031A (380-520MHz)	4.15	380	48	47.3	CW	E	0.94	BS	0.031	0.016	0.046	0.020	0.062	0.090	0.201	0.284	0.285	0.259	0.5	0.129	0.061	0.06
Roof	HAE6031A (380-520MHz)	4.15	393.1	48	47.2	CW	E	0.94	BS	0.017	0.006	0.018	0.022	0.048	0.105	0.212	0.244	0.278	0.278	0.5	0.123	0.058	0.06
Roof	HAE6031A (380-520MHz)	4.15	406.125	48	47.2	CW	E	0.94	BS	0.013	0.012	0.024	0.035	0.076	0.114	0.215	0.280	0.340	0.334	0.5	0.144	0.068	0.07
Roof	HAE6031A (380-520MHz)	4.15	422.1	48	47.3	CW	E	0.95	BS	0.012	0.014	0.018	0.046	0.075	0.156	0.202	0.248	0.297	0.305	0.5	0.137	0.065	0.07
Roof	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	BS	0.011	0.014	0.027	0.059	0.083	0.117	0.181	0.290	0.376	0.372	0.5	0.153	0.073	0.07
Roof	HAE6031A (380-520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	BS	0.008	0.008	0.015	0.047	0.066	0.145	0.208	0.278	0.324	0.325	0.5	0.142	0.069	0.07
Roof	HAE6031A (380-520MHz)	4.15	470	48	47.3	CW	E	0.98	BS	0.004	0.007	0.016	0.052	0.076	0.118	0.184	0.264	0.341	0.380	0.5	0.144	0.071	0.07

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAE6012A (380-433 MHz)	2.15	380	48	47.3	CW	E	0.94	PB	0.071	0.117	0.057	0.5	0.082	0.038	0.04
Roof	HAE6012A (380-433 MHz)	2.15	393.1	48	47.2	CW	E	0.94	PB	0.105	0.124	0.090	0.5	0.106	0.050	0.05
Roof	HAE6012A (380-433 MHz)	2.15	406.125	48	47.2	CW	E	0.94	PB	0.175	0.071	0.191	0.5	0.146	0.069	0.07
Roof	HAE6012A (380-433 MHz)	2.15	419.6	48	47.4	CW	E	0.95	PB	0.097	0.059	0.088	0.5	0.081	0.039	0.04
Roof	HAE6012A (380-433 MHz)	2.15	433	48	47.4	CW	E	0.96	PB	0.057	0.039	0.060	0.5	0.052	0.025	0.03
Roof	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94	PB	0.061	0.074	0.052	0.5	0.062	0.029	0.03
Roof	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	PB	0.160	0.115	0.111	0.5	0.129	0.061	0.06
Roof	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	PB	0.172	0.122	0.196	0.5	0.163	0.077	0.08
Roof	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	PB	0.091	0.083	0.090	0.5	0.088	0.042	0.04
Roof	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	PB	0.061	0.055	0.064	0.5	0.060	0.029	0.03
Roof	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	PB	0.011	0.012	0.006	0.5	0.010	0.005	0.00
Roof	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	PB	0.022	0.016	0.015	0.5	0.018	0.008	0.01
Roof	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	PB	0.030	0.019	0.033	0.5	0.027	0.013	0.01
Roof	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	PB	0.016	0.017	0.014	0.5	0.016	0.007	0.01
Roof	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	PB	0.007	0.004	0.007	0.5	0.006	0.003	0.00

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAE4003A (450-470MHz)	2.15	450.0125	48	46.9	CW	E	0.97	PB	0.062	0.078	0.151	0.5	0.097	0.047	0.05
Roof	HAE4003A (450-470MHz)	2.15	460.0125	48	46.8	CW	E	0.98	PB	0.028	0.074	0.059	0.5	0.054	0.026	0.03
Roof	HAE4003A (450-470MHz)	2.15	470	48	47.3	CW	E	0.98	PB	0.035	0.087	0.030	0.5	0.051	0.025	0.03
Roof	HAE4011A (450-470MHz)	5.65	450.0125	48	46.9	CW	E	0.97	PB	0.020	0.018	0.020	0.5	0.019	0.009	0.01
Roof	HAE4011A (450-470MHz)	5.65	460.0125	48	46.8	CW	E	0.98	PB	0.008	0.012	0.016	0.5	0.012	0.006	0.01
Roof	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	PB	0.006	0.010	0.010	0.5	0.009	0.004	0.00
Roof	RAE4014ARB (445 - 470MHz)	7.15	445	48	47.3	CW	E	0.97	PB	0.010	0.007	0.022	0.5	0.013	0.006	0.01
Roof	RAE4014ARB (445 - 470MHz)	7.15	457.5	48	47.2	CW	E	0.97	PB	0.006	0.008	0.014	0.5	0.009	0.005	0.00
Roof	RAE4014ARB (445 - 470MHz)	7.15	470	48	47.3	CW	E	0.98	PB	0.009	0.014	0.007	0.5	0.010	0.005	0.00
Roof	HAE6013A (380 - 470MHz)	4.15	380	48	47.3	CW	E	0.94	PB	0.043	0.064	0.046	0.5	0.051	0.024	0.02
Roof	HAE6013A (380 - 470MHz)	4.15	393.1	48	47.2	CW	E	0.94	PB	0.147	0.114	0.095	0.5	0.119	0.056	0.06
Roof	HAE6013A (380 - 470MHz)	4.15	406.125	48	47.2	CW	E	0.94	PB	0.093	0.076	0.175	0.5	0.115	0.054	0.06
Roof	HAE6013A (380 - 470MHz)	4.15	422.1	48	47.3	CW	E	0.95	PB	0.056	0.084	0.074	0.5	0.071	0.034	0.03
Roof	HAE6013A (380 - 470MHz)	4.15	438.1	48	47.6	CW	E	0.96	PB	0.074	0.065	0.116	0.5	0.085	0.041	0.04
Roof	HAE6013A (380 - 470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PB	0.054	0.051	0.098	0.5	0.068	0.033	0.03
Roof	HAE6013A (380 - 470MHz)	4.15	470	48	47.3	CW	E	0.98	PB	0.028	0.063	0.065	0.5	0.052	0.025	0.03

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAE6031A (380-520MHz)	4.15	380	48	47.3	CW	E	0.94	PB	0.061	0.096	0.050	0.5	0.069	0.032	0.03
Roof	HAE6031A (380-520MHz)	4.15	393.1	48	47.2	CW	E	0.94	PB	0.107	0.120	0.085	0.5	0.104	0.049	0.05
Roof	HAE6031A (380-520MHz)	4.15	406.125	48	47.2	CW	E	0.94	PB	0.151	0.070	0.182	0.5	0.134	0.063	0.06
Roof	HAE6031A (380-520MHz)	4.15	422.1	48	47.3	CW	E	0.95	PB	0.071	0.062	0.073	0.5	0.069	0.033	0.03
Roof	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	PB	0.061	0.057	0.095	0.5	0.071	0.034	0.03
Roof	HAE6031A (380-520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PB	0.056	0.048	0.104	0.5	0.069	0.034	0.03
Roof	HAE6031A (380-520MHz)	4.15	470	48	47.3	CW	E	0.98	PB	0.041	0.088	0.050	0.5	0.060	0.029	0.03
Roof	HAE6012A (380-433 MHz)	2.15	380	48	47.3	CW	E	0.94	PF	0.036	0.062	0.048	0.5	0.049	0.023	0.02
Roof	HAE6012A (380-433 MHz)	2.15	393.1	48	47.2	CW	E	0.94	PF	0.045	0.108	0.057	0.5	0.070	0.033	0.03
Roof	HAE6012A (380-433 MHz)	2.15	406.125	48	47.2	CW	E	0.94	PF	0.060	0.091	0.097	0.5	0.083	0.039	0.04
Roof	HAE6012A (380-433 MHz)	2.15	419.6	48	47.4	CW	E	0.95	PF	0.013	0.044	0.028	0.5	0.028	0.013	0.01
Roof	HAE6012A (380-433 MHz)	2.15	433	48	47.4	CW	E	0.96	PF	0.027	0.045	0.015	0.5	0.029	0.014	0.01
Roof	HAE6010A (380-433MHz)	5.65	380	48	47.3	CW	E	0.94	PF	0.032	0.044	0.072	0.5	0.049	0.023	0.02
Roof	HAE6010A (380-433MHz)	5.65	393.1	48	47.2	CW	E	0.94	PF	0.037	0.087	0.068	0.5	0.064	0.030	0.03
Roof	HAE6010A (380-433MHz)	5.65	406.125	48	47.2	CW	E	0.94	PF	0.072	0.089	0.135	0.5	0.099	0.047	0.05
Roof	HAE6010A (380-433MHz)	5.65	419.6	48	47.4	CW	E	0.95	PF	0.007	0.052	0.046	0.5	0.035	0.017	0.02
Roof	HAE6010A (380-433MHz)	5.65	433	48	47.4	CW	E	0.96	PF	0.050	0.034	0.027	0.5	0.037	0.018	0.02

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAE6011A (380-433MHz)	7.15	380	48	47.3	CW	E	0.94	PF	0.006	0.017	0.009	0.5	0.011	0.005	0.01
Roof	HAE6011A (380-433MHz)	7.15	393.1	48	47.2	CW	E	0.94	PF	0.006	0.020	0.012	0.5	0.013	0.006	0.01
Roof	HAE6011A (380-433MHz)	7.15	406.125	48	47.2	CW	E	0.94	PF	0.007	0.023	0.015	0.5	0.015	0.007	0.01
Roof	HAE6011A (380-433MHz)	7.15	419.6	48	47.4	CW	E	0.95	PF	0.006	0.009	0.004	0.5	0.006	0.003	0.00
Roof	HAE6011A (380-433MHz)	7.15	433	48	47.4	CW	E	0.96	PF	0.004	0.004	0.003	0.5	0.004	0.002	0.00
Roof	HAE4003A (450-470MHz)	2.15	450.0125	48	46.9	CW	E	0.97	PF	0.085	0.036	0.034	0.5	0.052	0.025	0.03
Roof	HAE4003A (450-470MHz)	2.15	460.0125	48	46.8	CW	E	0.98	PF	0.091	0.061	0.084	0.5	0.079	0.039	0.04
Roof	HAE4003A (450-470MHz)	2.15	470	48	47.3	CW	E	0.98	PF	0.074	0.056	0.026	0.5	0.052	0.025	0.03
Roof	HAE4011A (450-470MHz)	5.65	450.0125	48	46.9	CW	E	0.97	PF	0.017	0.008	0.007	0.5	0.011	0.005	0.01
Roof	HAE4011A (450-470MHz)	5.65	460.0125	48	46.8	CW	E	0.98	PF	0.021	0.013	0.019	0.5	0.018	0.009	0.01
Roof	HAE4011A (450-470MHz)	5.65	470	48	47.3	CW	E	0.98	PF	0.016	0.013	0.011	0.5	0.013	0.007	0.01
Roof	RAE4014ARB (445 - 470MHz)	7.15	445	48	47.3	CW	E	0.97	PF	0.016	0.005	0.004	0.5	0.008	0.004	0.00
Roof	RAE4014ARB (445 - 470MHz)	7.15	457.5	48	47.2	CW	E	0.97	PF	0.018	0.012	0.006	0.5	0.012	0.006	0.01
Roof	RAE4014ARB (445 - 470MHz)	7.15	470	48	47.3	CW	E	0.98	PF	0.021	0.018	0.007	0.5	0.015	0.008	0.01

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAE6013A (380-470MHz)	4.15	380	48	47.3	CW	E	0.94	PF	0.025	0.069	0.077	0.5	0.057	0.027	0.03
Roof	HAE6013A (380-470MHz)	4.15	393.1	48	47.2	CW	E	0.94	PF	0.038	0.094	0.080	0.5	0.071	0.033	0.03
Roof	HAE6013A (380-470MHz)	4.15	406.125	48	47.2	CW	E	0.94	PF	0.068	0.100	0.104	0.5	0.091	0.043	0.04
Roof	HAE6013A (380-470MHz)	4.15	422.1	48	47.3	CW	E	0.95	PF	0.021	0.055	0.022	0.5	0.033	0.016	0.02
Roof	HAE6013A (380-470MHz)	4.15	438.1	48	47.6	CW	E	0.96	PF	0.108	0.050	0.017	0.5	0.058	0.028	0.03
Roof	HAE6013A (380-470MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PF	0.096	0.053	0.061	0.5	0.070	0.034	0.03
Roof	HAE6013A (380-470MHz)	4.15	470	48	47.3	CW	E	0.98	PF	0.065	0.050	0.043	0.5	0.053	0.026	0.03
Roof	HAE6031A (380-520MHz)	4.15	380	48	47.3	CW	E	0.94	PF	0.035	0.056	0.094	0.5	0.062	0.029	0.03
Roof	HAE6031A (380-520MHz)	4.15	393.1	48	47.2	CW	E	0.94	PF	0.076	0.098	0.074	0.5	0.083	0.039	0.04
Roof	HAE6031A (380-520MHz)	4.15	406.125	48	47.2	CW	E	0.94	PF	0.060	0.153	0.108	0.5	0.107	0.051	0.05
Roof	HAE6031A (380-520MHz)	4.15	422.1	48	47.3	CW	E	0.95	PF	0.023	0.041	0.029	0.5	0.031	0.015	0.01
Roof	HAE6031A (380-520MHz)	4.15	438.1	48	47.6	CW	E	0.96	PF	0.086	0.028	0.015	0.5	0.043	0.021	0.02
Roof	HAE6031A (380-520MHz)	4.15	453.9875	48	47.1	CW	E	0.97	PF	0.086	0.051	0.054	0.5	0.064	0.031	0.03
Roof	HAE6031A (380-520MHz)	4.15	470	48	47.3	CW	E	0.98	PF	0.082	0.086	0.035	0.5	0.068	0.033	0.03

MPE calculations are defined in section 13.0.

Appendix E - SAR Simulation Report



**COMPUTATIONAL EME COMPLIANCE ASSESSMENT OF THE APX 4500,
MODEL M22QSS9PW1AN MOBILE RADIO.**

April 23rd, 2013

William Elliott, Giorgi Bit-Babik, Ph.D., and Antonio Faraone, Ph.D.

Motorola Solutions EME Research Lab, Plantation, Florida

Introduction

This report summarizes the computational [numerical modeling] analysis performed to document compliance of the APX 4500 Model Number M22QSS9PW1AN Mobile Radio and vehicle-mounted antennas with the Federal Communications Commission (FCC) guidelines for human exposure to radio frequency (RF) emissions. The radio operates in the 380 - 470 MHz frequency band.

This computational analysis supplements the measurements conducted to evaluate the compliance of the exposure from this mobile radio with respect to applicable *maximum permissible exposure* (MPE) limits. All test conditions (15 in total) that did not conform with applicable MPE limits were analyzed to determine whether those conditions complied with the *specific absorption rate* (SAR) limits for general public exposure (1.6 W/kg averaged over 1 gram of tissue and 0.08 W/kg averaged over the whole body) set forth in FCC guidelines, which are based on the IEEE C95.1-1999 standard [1]. The same test conditions were also analyzed to determine compliance with the SAR limits set forth in the ICNIRP [3] guidelines and IEEE Std. C95.1-2005 standard [4] (2.0 W/kg averaged over 10 gram of tissue and 0.08 W/kg averaged over the whole body). In total 30 independent simulations have been performed addressing exposure of passenger to the UHF mobile radio with trunk-mount antennas.

For all simulations a commercial code based on Finite-Difference-Time-Domain (FDTD) methodology was employed to carry out the computational analysis. It is well established and recognized within the scientific community that SAR is the primary dosimetric quantity used to evaluate the human body's absorption of RF energy and that MPEs are in fact derived from

SAR. Accordingly, the SAR computations provide a scientifically valid and more relevant estimate of human exposure to RF energy.

Method

The simulation code employed is XFDTD™ v7.2, by Remcom Inc., State College, PA. This computational suite features a heterogeneous full body standing model (High Fidelity Body Mesh), derived from the so-called Visible Human [2], discretized in 3 mm voxels. The dielectric properties of 23 body tissues are automatically assigned by XFDTD™ at any specific frequency. The “seated” man model was obtained from the standing model by modifying the articulation angles at the hips and the knees. Details of the computational method and model are provided in the Appendix to this report.

The car model has been imported into XFDTD™ from the CAD file of a sedan car having dimensions 4.98 m (L) x 1.85 m (W) x 1.18 m (H), and discretized with maximum resolution of 5 mm. The Figure 1 below show both the CAD model and the photo of the actual car This CAD model has been incorporated into the IEC/IEEE 62704-2 draft standard.

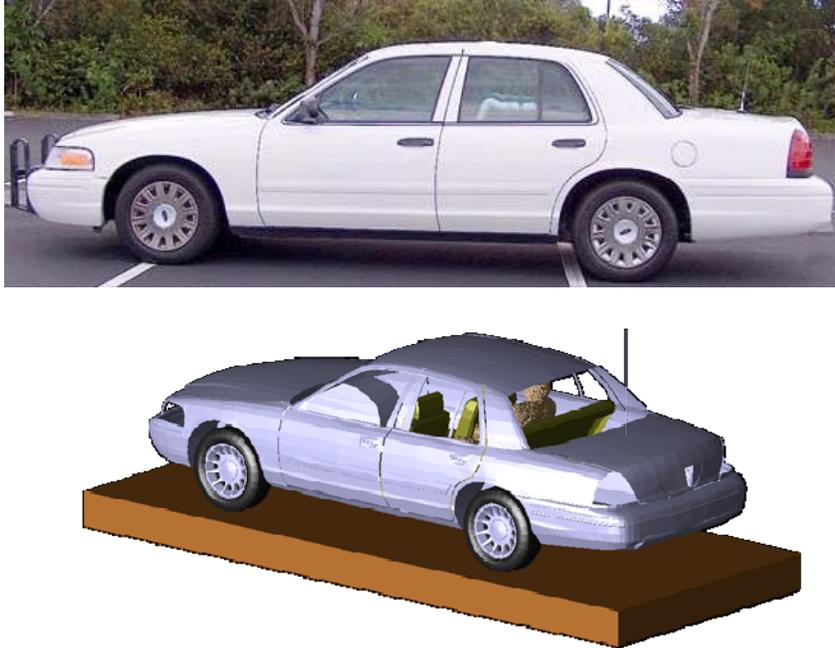


Figure 1: The photo picture of the car used in field measurements and the corresponding CAD model used in simulations

For passenger exposure, the antenna position is on the trunk and the distance of trunk mounted antenna from the passenger head when the passenger is located in the center of the back seat was set at 85 cm, to replicate the experimental conditions used in MPE measurements. According to the IEC/IEEE 62704-2 draft standard (February, 2012) for exposure simulations from vehicle mount antennas the lossy dielectric slab with 30 cm thickness, dielectric constant of 8 and conductivity of 0.01 S/m has been introduced in the computational model to properly account for the effect of the ground (pavement) on exposure.

Figure 2 shows some of the XFDTD™ computational models used for passenger exposure to trunk mounted antennas

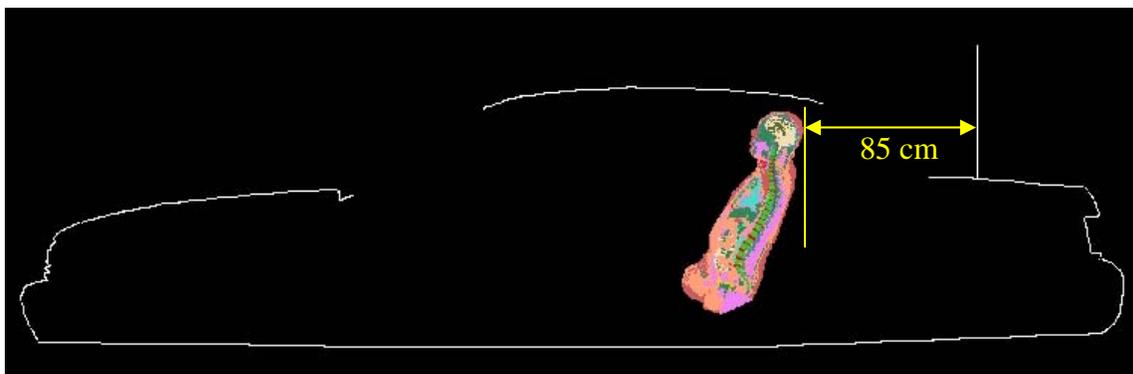
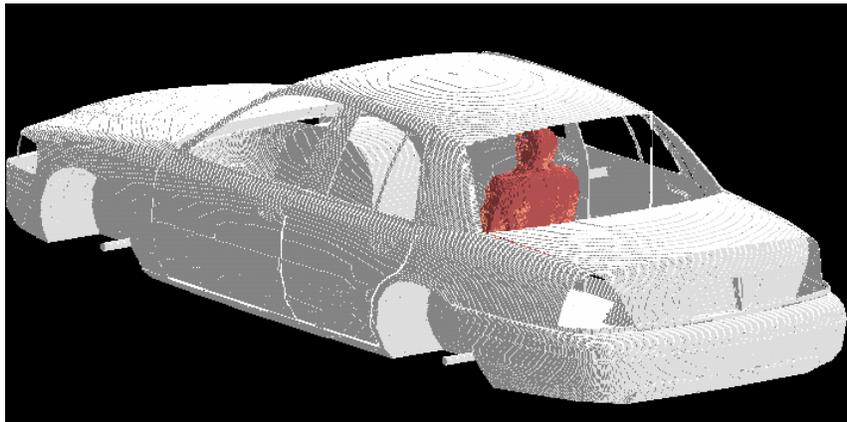


Figure 2: Passenger model exposed to a trunk-mount antenna: XFDTD geometry.
The antenna is mounted at 85 cm from the passenger located in the center of the back seat.

The computational code employs a time-harmonic excitation to produce a steady state electromagnetic field in the exposed body. Subsequently, the corresponding SAR distribution is automatically processed in order to determine the whole-body, 1-g, and 10-g average SAR. The maximum average output power from mobile radio antenna is 48 W. Since the ohmic losses in the cable and in the car materials, as well as the mismatch losses at the antenna feed-point, are neglected, and source-based time averaging (50% talk time) is employed, all computational results are normalized to half of it, i.e., 24 W average net output power.

Results of SAR computations for car passengers

The test conditions requiring SAR computations are summarized in Table I, together with the antenna data, the SAR results, and power density (P.D.) as obtained from the measurements in the corresponding test conditions. The conditions are for antennas mounted on the trunk. The antenna length in Table I includes the 1.8 cm magnetic mount base used in measurements to position the antenna on the vehicle. The same length was used in simulation model. The passenger is located in the center or on the side of the rear seat. The passenger model is surrounded by air, as the seat, which is made out of poorly conductive fabrics, is not included in the computational model. All the transmit frequency, antenna length, and passenger location combinations reported in Table I have been simulated individually.

Table I: Results of the SAR computations for passenger exposure (50% talk-time).

Mount location	Antenna Kit #	Antenna length (cm)	Freq [MHz]	P.D. (mw/cm ²)	Exposure location	SAR [W/kg]					
						1-g	10-g	WB			
Trunk	HAE6010A	65.3	380	0.2	Back Center	0.101	0.081	0.0054			
					Back Side	0.052	0.029	0.0032			
			406.125	0.24	Back Center	0.190	0.167	0.0070			
					Back Side	0.175	0.102	0.0047			
Trunk	HAE6013A	30.8	380	0.26	Back Center	0.165	0.116	0.0109			
					Back Side	0.252	0.158	0.0075			
			393.1	0.29	Back Center	0.168	0.082	0.0096			
					Back Side	0.304	0.188	0.0096			
			406.125 Fig 3&4	0.36	Back Center	0.421	0.286	0.0116			
					Back Side	0.380	0.265	0.0091			
			422.1	0.27	Back Center	0.209	0.146	0.0105			
					Back Side	0.275	0.178	0.0098			
			438.1	0.26	Back Center	0.169	0.135	0.0117			
					Back Side	0.421	0.275	0.0114			
			453.9875	0.28	Back Center	0.215	0.130	0.0147			
					Back Side	0.334	0.231	0.0140			
			Trunk	HAE6031A	29.8	380	0.31	Back Center	0.164	0.115	0.0108
								Back Side	0.249	0.157	0.0075
393.1	0.3	Back Center				0.166	0.081	0.0095			
		Back Side				0.301	0.186	0.0095			
406.125	0.3	Back Center				0.417	0.282	0.0115			
		Back Side				0.376	0.263	0.0090			
422.1	0.29	Back Center				0.207	0.145	0.0104			
		Back Side				0.273	0.177	0.0097			
438.1	0.27	Back Center				0.166	0.133	0.0115			
		Back Side				0.418	0.273	0.0112			
453.9875	0.32	Back Center				0.214	0.127	0.0145			
		Back Side				0.332	0.229	0.0138			
470	0.27	Back Center				0.184	0.116	0.0100			
		Back Side				0.207	0.147	0.0110			

The SAR distribution in the passenger model in the exposure condition that gave highest 1-g SAR is reported in Figure 3 (406.125 MHz, passenger in the center of the back seat, HAE6013A antenna).


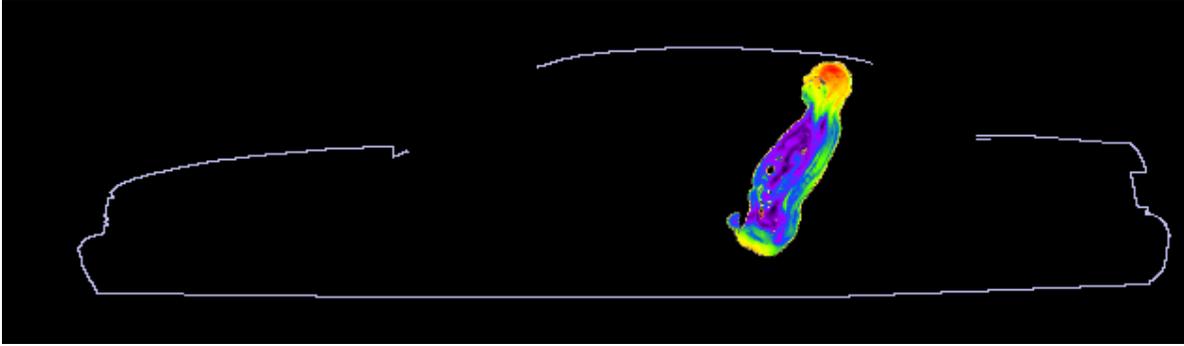


Figure 3. SAR distribution at 406.125 MHz in the passenger model located in the center of the back seat, produced by the trunk-mount HAE6013A antenna. The contour plot is relative to the plane where the peak 1-g average SAR for this exposure condition occurs.

The two pictures below in Figure 4 show the E and H field distributions in the plane of the antenna corresponding to the condition in Figure 3.



a)

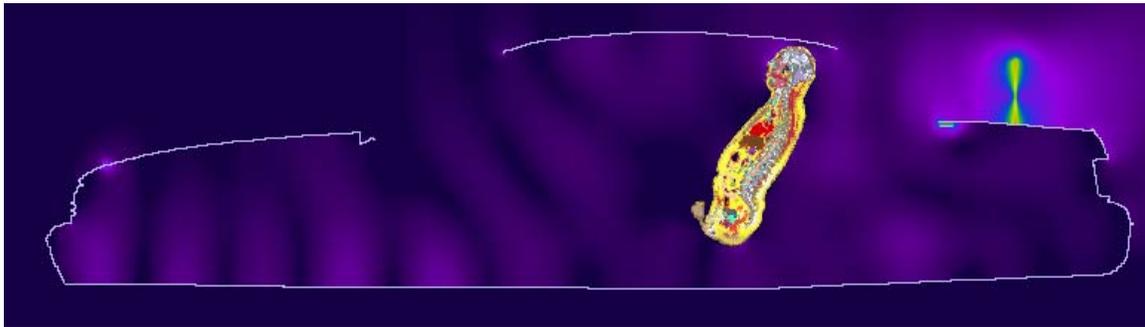

b)

Figure 4. (a) E-field distribution corresponding to exposure condition of Figure 3, and (b) H-field distribution corresponding to exposure condition of Figure 3.

The highest 1-g SAR was produced in the passenger exposure condition with HAE6013A antenna at 406.125 MHz (passenger in the center of the back seat).

Additional photographs are required to depict the E and H-Field distributions for the HAE6010A antenna due to its difference in construction to the quarter-wave antenna where overall peak SAR occurred.

The two pictures below in Figure 5 show the E and H field distributions in the plane of the antenna corresponding to the worst case condition for the HAE6010A antenna. .



a)



b)

Figure 5. (a) E-field distribution and (b) H-field distribution corresponding to worst case exposure condition for the HAE6010A antenna.

Results of SAR Computations

The overall maximum peak 1-g SAR in all simulated conditions is 0.42 W/kg, less than the 1.6 W/kg limit, while the overall maximum peak 10-g SAR is 0.29 W/kg, less than the 2.0 W/kg limit. The maximum whole-body average SAR is 0.015 W/kg, less than the 0.08 W/kg limit.

Conclusions

Under the test conditions described for evaluating passenger exposure to the RF electromagnetic fields emitted by vehicle-mounted antennas used in conjunction with this mobile radio product, the present analysis shows that the computed SAR values are compliant with the FCC exposure limits for the general public as well as with the corresponding ICNIRP and IEEE Std. C95.1-2005 SAR limits.

References

- [1] IEEE Standard C95.1-1999. *IEEE Standard for Safety Levels with Respect to Human Exposure to RF Electromagnetic Fields, 3 kHz to 300 GHz.*
- [2] http://www.nlm.nih.gov/research/visible/visible_human.html
- [3] ICNIRP (International Commission on Non-Ionising Radiation Protection). 1998. *Guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz).* Health Phys. 74:494–522.
- [4] IEEE. 2005. *IEEE standard for safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz,* IEEE Std C95.1-2005

APPENDIX: SPECIFIC INFORMATION FOR SAR COMPUTATIONS

This appendix follows the structure outlined in Appendix B.III of the Supplement C to the FCC OET Bulletin 65. Most of the information regarding the code employed to perform the numerical computations has been adapted from the draft IEC/IEEE 62704-1 and 62704-2 standards, and from the XFDTD™ User Manuals. Remcom Inc., owner of XFDTD™, is kindly acknowledged for the help provided.

1) Computational resources


- a) A multiprocessor system equipped with two Intel Xeon X5570 quad-core CPUs and four Tesla C1060 GPUs was employed for all simulations.
- b) The memory requirement was from 7 GB to 12 GB. Using the above-mentioned system with 8-cores operating concurrently, the typical simulation would run for 6-10 hours and with all four GPUs activated by the XFDTD version 7.2 this time would be from 60-180 min.

2) FDTD algorithm implementation and validation



a) We employed a commercial code (XFDTD™ v7.2, by Remcom Inc.) that implements the Yee's FDTD formulation [1]. The solution domain was discretized according to a rectangular grid with an adaptive 3-10 mm step in all directions. Sub-gridding was not used. Seven-layer PML absorbing boundary conditions are set at the domain boundary to simulate free space radiation processes. The excitation is a lumped voltage generator with 50-ohm source impedance. The code allows selecting *wire objects* without specifying their radius. We used a wire to represent the antenna. The car body is modeled by solid metal. We did not employ the "thin wire" algorithm since within the adaptive grid the minimum resolution of 3 mm was specified and used to model the antenna and the antenna wire radius was never smaller than one-fifth of the voxel dimension. In fact, the XFDTD™ manual specifies that "In most cases, standard PEC material will serve well as a wire. However, in cases where the wire radius is important to the calculation and is less than 1/4 the length of the average cell edge, the thin wire material may be used to accurately simulate the correct wire diameter." The maximum voxel dimension in the plane normal to the antenna in all our simulations was 3 mm, and the antenna radius is always at least 1 mm (1 mm for the short quarter-wave antennas and 1.5 mm for the long gain antennas), so there was no need to specify a "thin wire" material.

Because the field impinges on the bystander or passenger model at a distance of several tens of voxels from the antenna, the details of antenna wire modeling are not expected to have significant impact on the exposure level.

Some antennas have inductive loading coils located in the mid section as shown in the picture below of the HAE 6010A and HAE 4011A antenna examples.


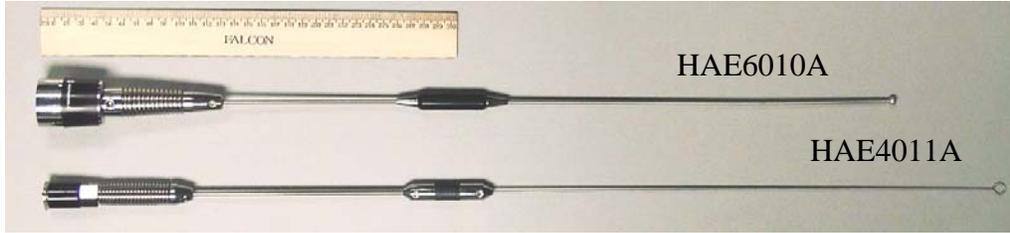


The X-ray of the reactive loads of the HAE4011A and HAE6010A antennas is also presented in the next pictures below. Those elements are significantly shorter than the length of the antenna and are about 1/40 of the wavelength at center operating frequency. They were modeled as lumped reactive elements. The comparison with measurements and validity of such simulation model has been summarized in [9].

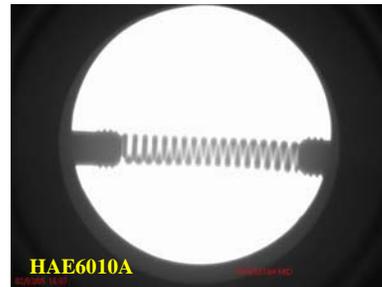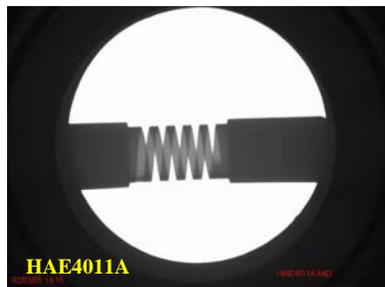

b) XFDTD™ is one of the most widely employed commercial codes for electromagnetic simulations. It has gone through extensive validation and has proven its accuracy over time in many different applications. One example is provided in [3].

We carried out a validation of the code algorithm by running the canonical test case involving a half-wave dipole. The dipole is 0.475 times the free space wavelength at 400 MHz, i.e., about 35.5 cm long. The discretization used to model the dipole was 5 mm. Also in this case, the “thin wire” model was not needed. The following picture shows XFDTD™ outputs regarding the antenna feed-point impedance ($75.5 + j 11.9$ ohm), as well as qualitative distributions of the total E and H fields near the dipole. The radiation pattern is shown as well (one lobe in elevation). As expected, the 3 dB beamwidth is about 78 degrees. The computed results are in good agreement with the known analytical results for the half -wave dipole antenna which could be found in [10].

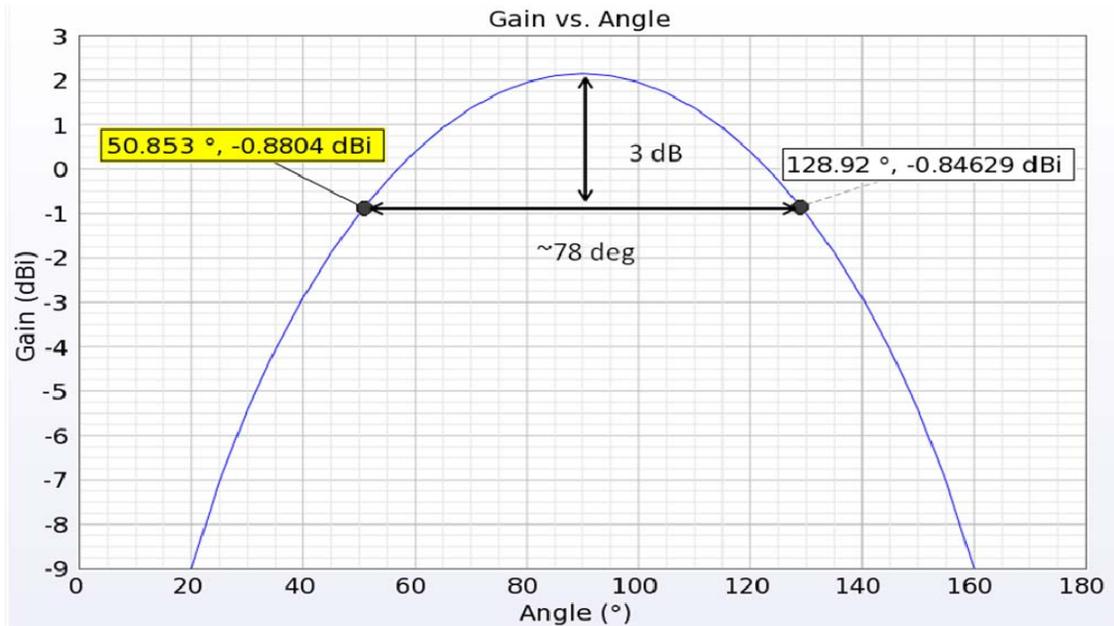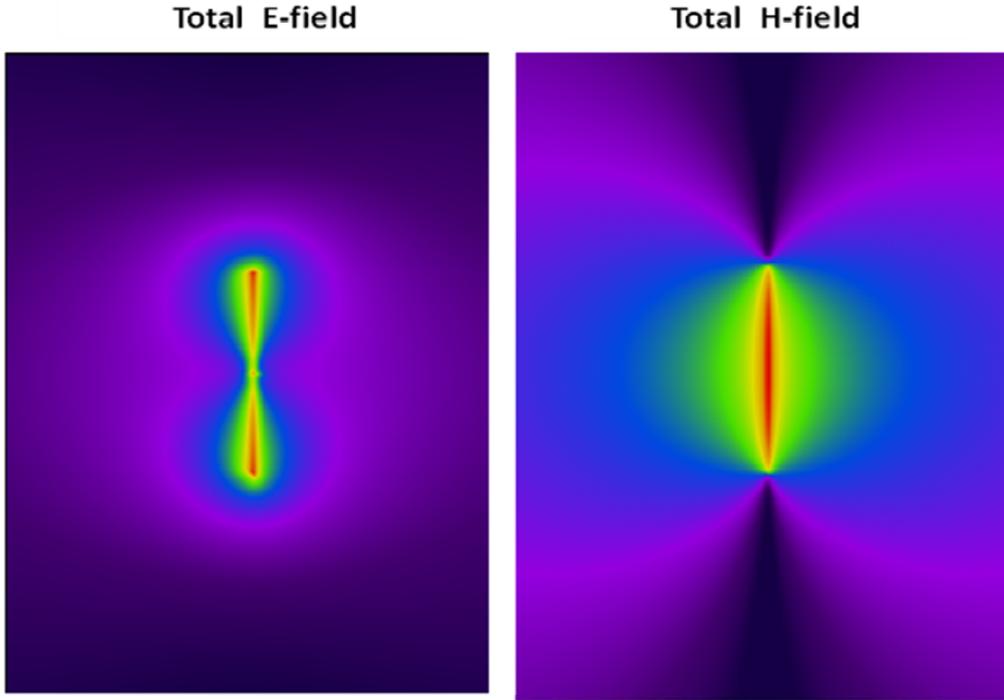

This validation ensures that the input impedance calculation is carried out correctly in XFDTD™, thereby enabling accurate estimates of the radiated power. It further ensures that the wire model employed in XFDTD™, which we used to model the antennas, produces physically meaningful current and fields distributions. Both these aspects ensure that the field quantities are correctly computed both in terms of absolute amplitude and relative distribution.

3) Computational parameters

a) The following table reports the main parameters of the FDTD model employed to perform our computational analysis:

PARAMETER	X	Y	Z
Voxel size	3-9 mm	3-9 mm	1-9 mm
Minimum domain dimensions employed for passenger computations with the trunk-mount antennas	397	910	559
Maximum domain dimensions employed for bystander computations with the trunk-mount antennas	449	791	709
Time step	About 0.7 of the Courant limit (typically 5 ps)		
Objects separation from FDTD boundary (mm)	>200	>200	>200
Number of time steps	Enough to reach at least -60 dB convergence		
Excitation	Sinusoidal (not less than 10 periods)		

4) Phantom model implementation and validation

a) The human body models (bystander and/or passenger) employed in our simulations are those defined in the draft IEEE 62704-2 standard. They are originally based on data from the *visible human project* sponsored by the National Library of Medicine (NLM) (http://www.nlm.nih.gov/research/visible/visible_human.html). The original male data set consists of MRI, CT and anatomical images. Axial MRI images of the head and neck and longitudinal sections of the rest of the body are available at 4 mm intervals. The MRI images have 256 pixel by 256 pixel resolution. Each pixel has 12 bits of gray tone resolution. The CT data consists of axial CT scans of the entire body taken at 1 mm intervals at a resolution of 512 pixels by 512 pixels where each pixel is made up of 12 bits of gray tone. The axial anatomical images are 2048 pixels by 1216 pixels where each pixel is defined by 24 bits of color. The anatomical cross sections are also at 1 mm intervals and coincide with the CT axial images. There are 1871 cross sections. Dr. Michael Smith and Dr. Chris Collins of the Milton S. Hershey Medical Center, Hershey, Pa, created the High Fidelity Body mesh. Details of body model creation are given in the *methods* section in [5].

The final bystander and passenger model was generated for the IEEE 62704-2 standard from the above dataset using the Varipose software, Remocm Inc., The body mesh contains 39 tissues materials. Measured values for the tissue parameters for a broad frequency range are included with the mesh data. The correct values are interpolated from the table of measured data and entered into the appropriate mesh variables. The tissue conductivity and permittivity variation vs. frequency is included in the XFDTD™ calculation by a multiple-pole approximation to the Cole-Cole approximated tissue parameters reported in [11].

a) The XFDTD™ High Fidelity Body Mesh model correctly represents the anatomical structure and the dielectric properties of body tissues, so it is appropriate for determining the highest exposure expected for normal device operation.

b) One example of the accuracy of XFDTD™ for computing SAR has been provided in [6]. The study reported in [6] is relative to a large-scale benchmark of measurement and computational tools carried out within the IEEE Standards Coordinating Committee 34, Sub-Committee 2.

5) Tissue dielectric parameters

a) The following table reports the dielectric properties computed for the 39 body tissue materials in the employed human body models at 450 MHz.

#	Tissue	ϵ_r	σ (S/m)	Density (kg/m ³)
1	bile	72.2	1.71	928
2	body fluid	63.7	1.37	1050
3	eye cornea	58.5	1.21	1051
4	fat	11.6	0.08	911
5	lymph	61.2	0.89	1035
6	mucous membrane	49.2	0.69	1102
7	toe, finger, and nails	13.0	0.10	1908
8	nerve spine	34.9	0.46	1075
9	muscle	56.8	0.81	1090
10	heart	65.0	0.99	1081
11	white matter	41.5	0.46	1041
12	stomach	67.1	1.02	1088
13	glands	61.2	0.89	1028
14	blood vessel	46.6	0.57	1102
15	liver	50.4	0.67	1079
16	gall bladder	60.7	1.15	1071
17	spleen	62.1	1.05	1089
18	cerebellum	54.7	1.06	1045
19	cortical bone	13.0	0.10	1908
20	cartilage	45.0	0.60	1100
21	ligaments	47.0	0.57	1142
22	skin	45.8	0.71	1109
23	large intestine	61.7	0.88	1088
24	tooth	13.0	0.10	2180
25	grey_matter	56.6	0.76	1045
26	eye lens	37.2	0.38	1076
27	outer lung	54.0	0.70	1050
28	small intestine	64.9	1.93	1030
29	eye sclera	57.2	1.02	1032
30	inner lung	23.5	0.38	394
31	pancreas	61.2	0.89	1087
32	blood	63.7	1.37	1050
33	cerebro_spinal_fluid	70.5	2.26	1007
34	eye vitreous humor	69.0	1.54	1005
35	kidneys	65.0	1.13	1066
36	bone marrow	11.8	0.19	1029
37	bladder	19.6	0.33	1086
38	testicles	62.9	1.04	1082
39	cancellous bone	22.2	0.24	1178

b) The tissue types and dielectric parameters used in the SAR computation are appropriate for determining the highest exposure expected for normal device operation, because they are derived from measurements performed on real biological tissues (XFDTD, Reference Manual Version 6.4, Remcom, Inc.).


c) The tabulated list of the dielectric parameters used in phantom models is provided at point 5(a). As regards the device (car plus antenna), we used perfect electric conductors.


6) Transmitter model implementation and validation

a) The essential features that must be modeled correctly for the particular test device model to be valid are:

- Car body. The car model is very similar to the car used for MPE measurements, so as to be able to correlate measured and simulated field values. This car model has been developed for the SAR computational draft standard IEC/IEEE 62704-2.
- Antenna. We used a straight wire, even when the gain antenna has a base coil for tuning. All the coil does is compensating for excess capacitance due to the antenna being slightly longer than half a wavelength. We do not need to do that in the model, as we used normalization with respect to the net radiated power, which is determined by the input resistance only. In this way, we neglect mismatch losses and artificially produce an overestimation of the SAR, thereby introducing a conservative bias in the model. This simulation model was also validated by comparing the computed and measured near-field distributions in the condition with antenna mounted on the reference ground plane and showed good agreement experimental data [9].
- Antenna location. We used the same location, relative to the edge of the car trunk, the backseat, or the roof, used in the MPE measurements. The following pictures show a lateral and a perspective view of the bystander and passenger model.



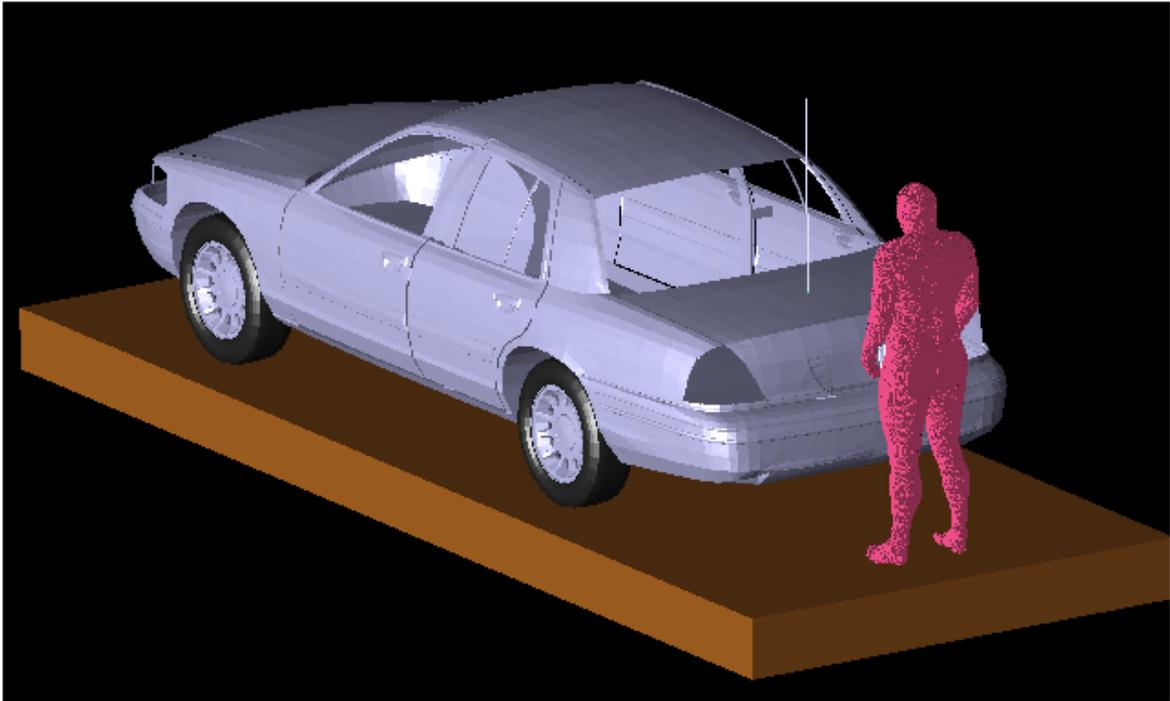



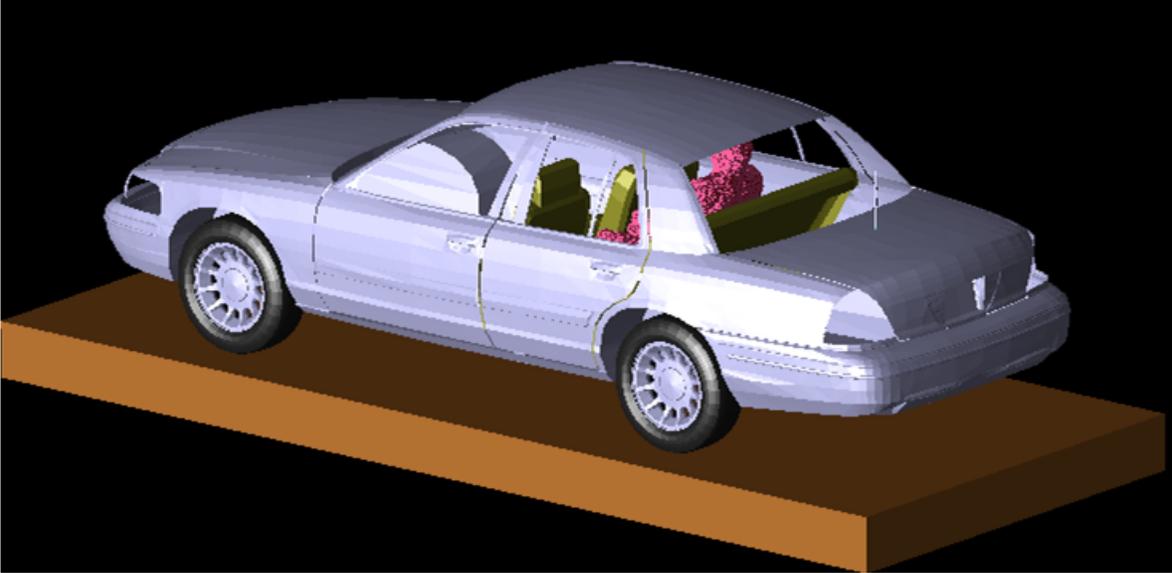


The car model is constituted by perfect electric conductor and does not include wheels in order to reduce its complexity. The passenger model is surrounded by air, as the seat, which is made out of poorly conductive fabrics, is not included in the computational model. The pavement has not been included in the model. The passenger and bystander models were validated for similar antenna and frequency conditions by comparing the MPE measurements at two VHF frequencies (146 MHz and 164 MHz) for antennas used for a VHF mobile radio analyzed previously in 2003 (FCC ID#ABZ99FT3046). The corresponding MPE measurements are reported in the compliance report relative to FCC ID#ABZ99FT3046. The comparison results are presented below, according to following definitions for the equivalent power densities (based on E or H-field):

$$S_E = \frac{|\mathbf{E}|^2}{2\eta}, \quad S_H = \frac{\eta}{2} |\mathbf{H}|^2, \quad \eta = 377 \Omega$$

Passenger with 17.5 cm monopole antenna (HAE4002A 421.5 MHz)

The following figure of the test model shows the car model, where the red dots individuate the back seat, as it can be observed from the other figure showing the cross section of the passenger. The comparison has been performed by taking the average of the computed steady-state field values at the six dotted locations, corresponding to the head, chest, and legs along the red dots line, and comparing them with the average of the MPE measurements performed at the head, chest and legs locations. Such a comparison is carried out at the same average power level (22 W, including the 50% duty factor) used in the MPE measurements.

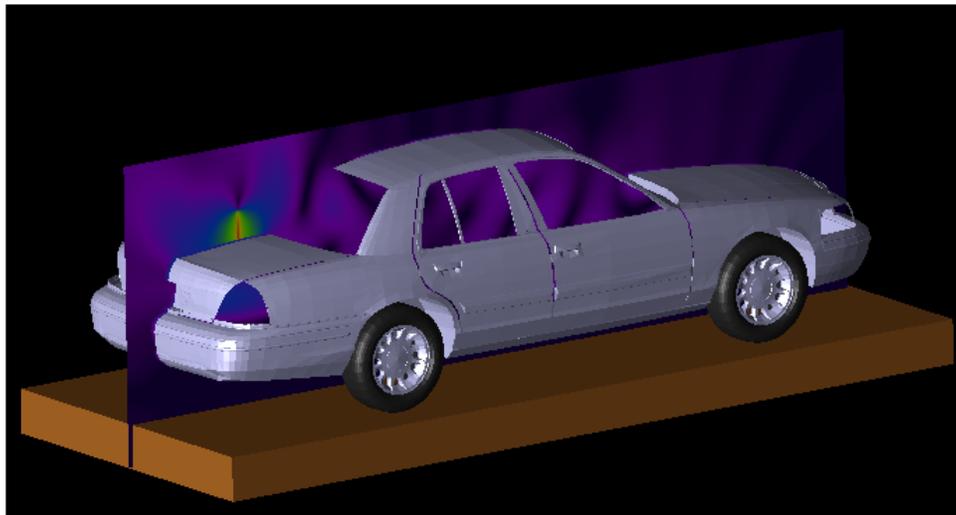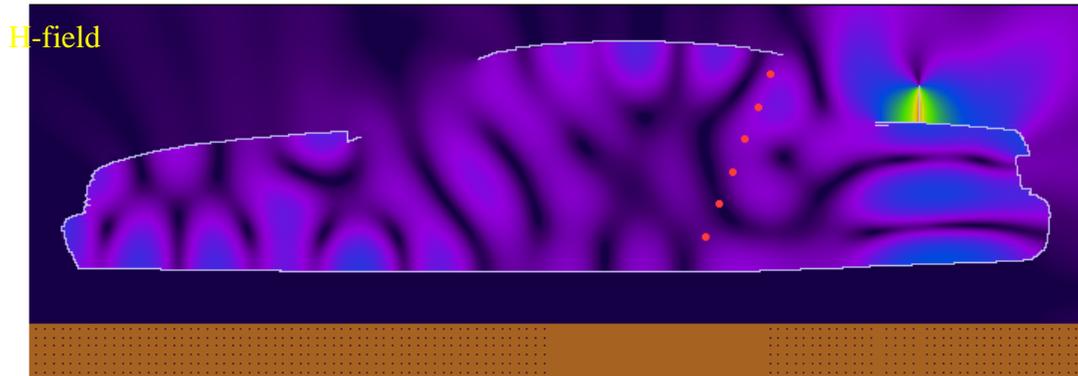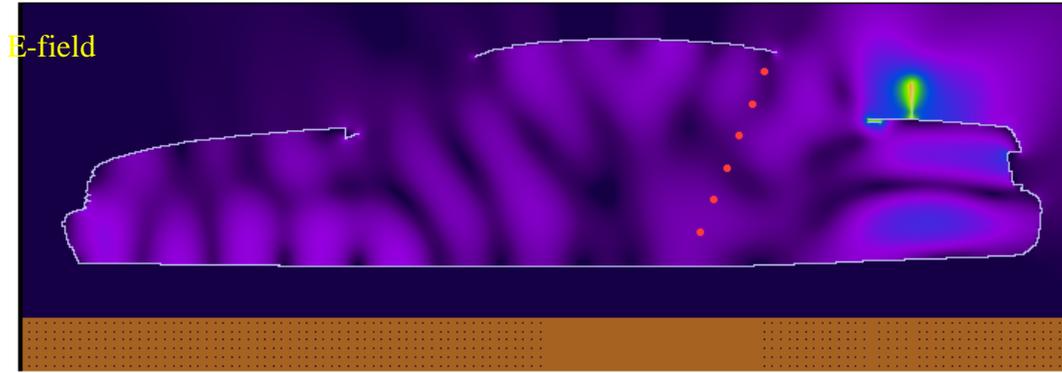

The equivalent power density (S) is computed from the E-field and the H-field separately. The following table reports the E-field values computed by XFDTD™ at the six locations, and the corresponding power density.

Location Number	E-field, V/m	Eq. Power Density 1.0 V source	Scaled Power Dens. 22 W output, mW/cm ²
1	3.11E-01	1.28E-04	1.56E-01
2	4.16E-01	2.29E-04	2.79E-01
3	5.25E-01	3.65E-04	4.45E-01
4	3.86E-01	1.98E-04	2.41E-01
5	3.84E-01	1.96E-04	2.39E-01
6	6.01E-01	4.80E-04	5.85E-01
Equivalent average Power Density			3.24E-01

Location Number	H-field, Weber/m ²	Eq. Power Density 1.0 V source	Scaled Power Dens. 22 W output, mW/cm ²
1	1.34E-03	3.37E-04	4.11E-01
2	1.08E-03	2.21E-04	2.70E-01
3	5.59E-04	5.89E-05	7.18E-02
4	5.45E-04	5.60E-05	6.82E-02
5	5.45E-04	5.59E-05	6.82E-02
6	5.23E-04	5.16E-05	6.29E-02
Equivalent average Power Density			1.59E-01

The radiated power (considering the mismatch to the 50 ohm unitary voltage source) is 1.81E-3 W, therefore a factor equal to 12188 is required to scale up to 22 W radiated. The corresponding scaled-up power densities are reported in the tables above, which show that the simulation overestimates the average power density from the MPE measurements (0.297 mW/cm²), as derived from the measured E-field reported in the following table:

Position	SE (meas), 22 W output mW/cm ²
Head	0.38
Chest	0.33
Lower Trunk	0.16

The simulations tend to overestimate the average power density levels, which is understandable since there are no ohmic losses and perfect impedance matching is enforced in the computational models. Based on these results, we conclude that the simulation will produce slight exposure overestimates (about 9%).

b) Descriptions and illustrations showing the correspondence between the modeled test device and the actual device, with respect to shape, size, dimensions and near-field radiating characteristics, are found in the main report.



c) Verification that the test device model is equivalent to the actual device for predicting the SAR distributions descends from the fact that the car and antenna size and location in the numerical model correspond to those used in the measurements.

d) The peak SAR is in the neck region for the passenger, which is in line with MPE measurements and predictions.

Passenger with 63.5 cm monopole antenna (HAE6010A 425 MHz)

The following figures show the car model with the field distribution in the horizontal planes where the MPE measurements have been performed. The comparison has been performed by taking the average of the computed steady-state field values at the three locations, corresponding to the head, chest, and lower trunk, and comparing them with the average of the MPE measurements performed at the head, chest and lower trunk locations. Such a comparison is carried out at the same average power level (61.5 W, including the 50% duty factor) used in the MPE measurements.



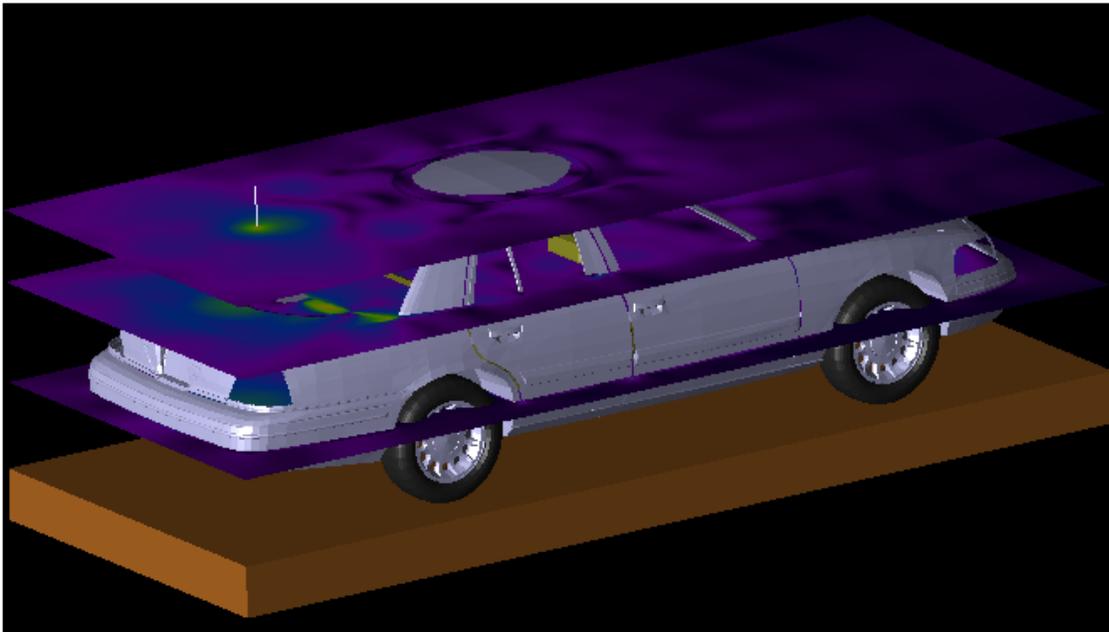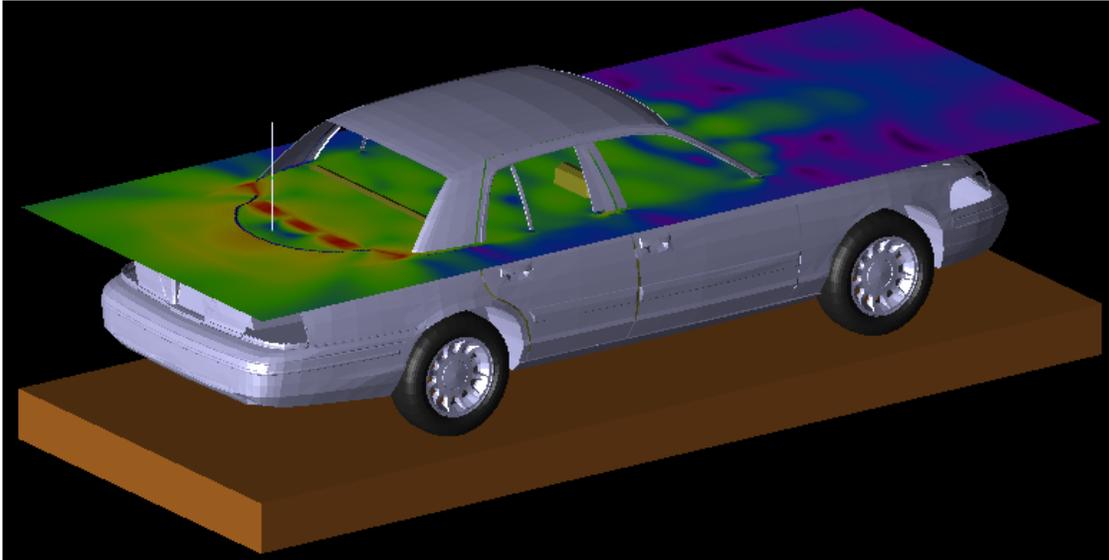

The equivalent power density (S) is computed from the E-field. The following table reports the E-field values computed by XFDTD™ at the three locations, and the corresponding power density.

Location Number	E-field, V/m	Eq. Power Density 1.0 V source	Scaled Power Dens. 61.5 W output, mW/cm ²
1	2.26E-01	6.76E-05	0.74
2	3.60E-01	1.72E-04	1.89
3	1.40E-01	2.59E-05	0.28
Equivalent average Power Density			0.97

The corresponding scaled-up power densities are reported in the tables above, which show that the simulation overestimates the average power density from the MPE measurements (0.52 mW/cm^2), as derived from the measured E-field reported in the following table:



Position	SE (meas), 60 W output mW/cm^2
Head	0.72
Chest	0.64
Lower Trunk	0.19

The simulations tend to overestimate the average power density levels, which is understandable since there are no ohmic losses and perfect impedance matching is enforced in the computational models. Based on these results, we conclude that the simulation will produce exposure overestimates (about 88%).

Bystander with 29 cm monopole antenna (HAE6013A 425 MHz)

The following figures show the E-field and H-field distributions across a vertical plane passing for the antenna and cutting the car in half. As done in the measurements, the MPE is computed from both E-field and H-field distributions, along the yellow dotted line at 10 points spaced 20 cm apart from each other up to 2 m in height. These lines and the field evaluation points are approximately indicated in the figures. The E-field and H-field distributions in the vertical plane placed at 90 cm from the antenna, behind the case, are shown as well. The points where the fields are sampled to determine the equivalent power density (S) are approximately indicated by the white dots. A picture of the antenna is not reported because it is identical to the HAE6013A.



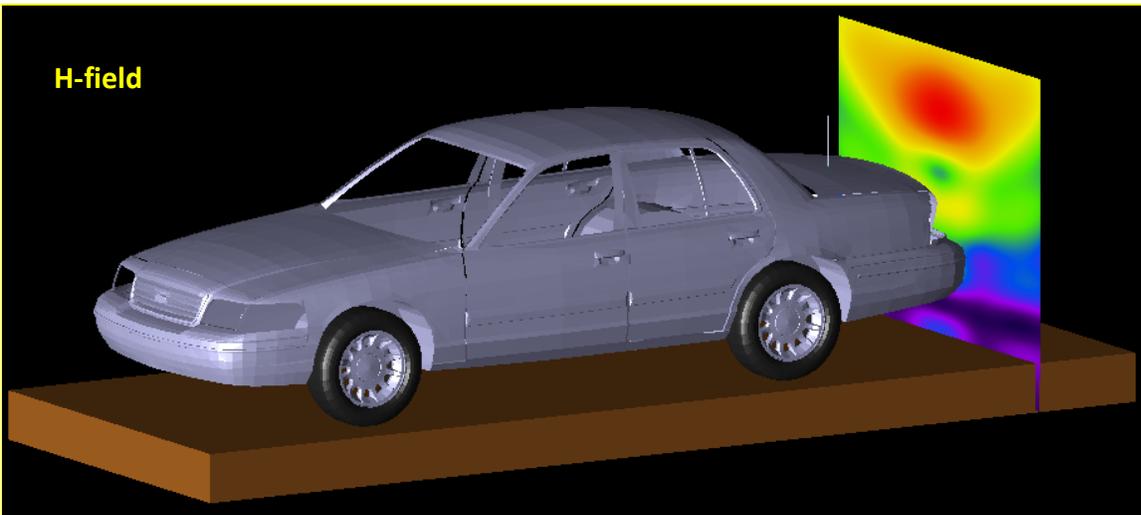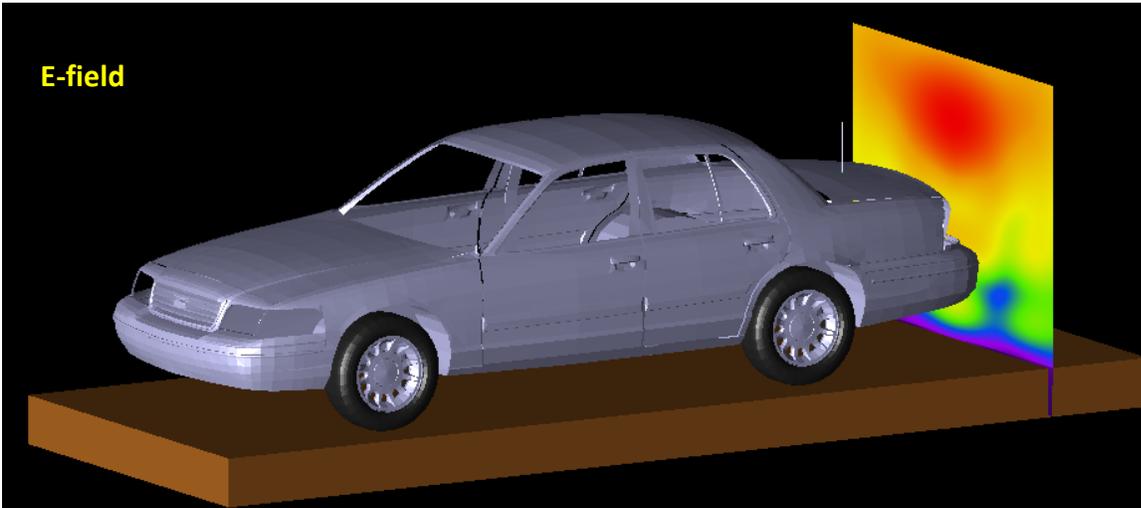


The following table reports the field values computed by XFDTD™ for the 1.0 V source and the corresponding power density values. The average exposure levels are computed as well.

Height (cm)	E (V/m)	S _E (W/m ²)	H (A/m)	S _H (W/m ²)
0	5.67E-02	4.27E-06	3.11E-04	1.83E-05
20	1.40E-01	2.59E-05	1.78E-04	5.96E-06

40	1.24E-01	2.03E-05	4.29E-04	3.47E-05
60	1.69E-01	3.79E-05	3.88E-04	2.84E-05
80	1.52E-01	3.08E-05	4.74E-04	4.24E-05
100	1.87E-01	4.65E-05	3.71E-04	2.59E-05
120	2.56E-01	8.67E-05	6.23E-04	7.31E-05
140	2.71E-01	9.73E-05	7.50E-04	1.06E-04
160	2.60E-01	8.94E-05	7.33E-04	1.01E-04
180	2.00E-01	5.31E-05	5.40E-04	5.50E-05
Average S_E		4.92E-05	Average S_H	4.91E-05


Since the conducted power during the MPE measurement was 123 W the calculated power density was then scaled up for 61.5 W radiated power (taking into account 50% talk time). This model does not include the mismatch loss, loss in the cable and finite conductivity of the car surface and as represents a conservative model for exposure assessment. The scaled-up power density values for 61.5 W radiated power are 6.03 W/m² (E), and 6.02 W/m² (H), that correspond to 0.603 mW/cm² (E), and 0.602 mW/cm² (H). Measurements yielded average power density of 0.309 mW/cm² (E), which shows that the calculated power density is overestimated. The following graph shows a comparison between the measured power density and the simulated one, based on E or H fields, normalized to 61.5 W radiated power.

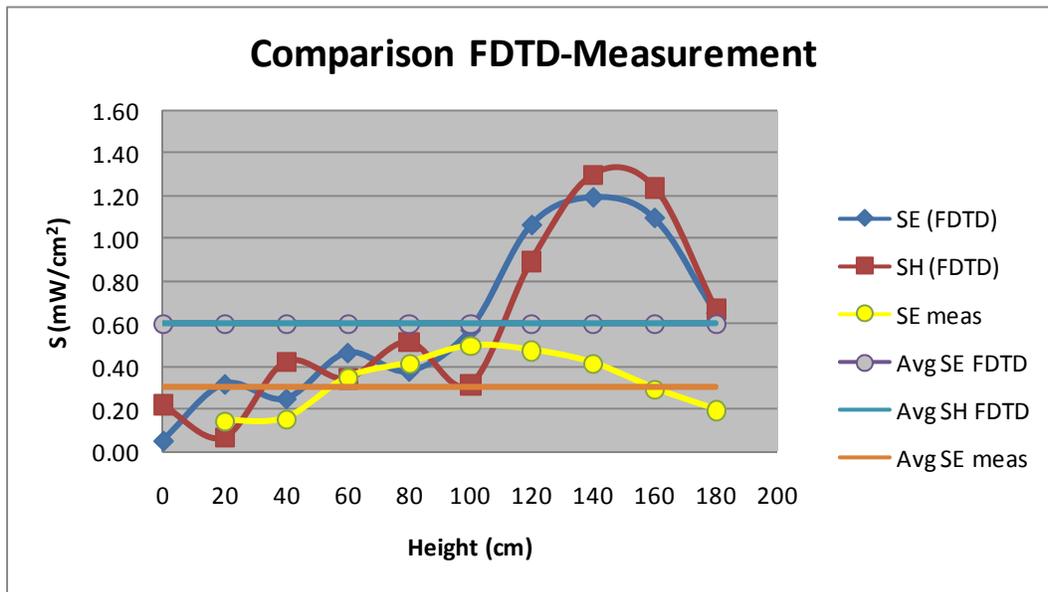


Bystander with 63.5 cm monopole antenna (HAE6010A 425 MHz)

The following figures show the E-field and H-field distributions across a vertical plane passing for the antenna and cutting the car in half. As done in the measurements, the MPE is computed from both E-field and H-field distributions, along the yellow dotted line at 10 points spaced 20 cm apart from each other up to 2 m in height. These lines and the field evaluation points are approximately indicated in the figures. The E-field and H-field distributions in the vertical plane placed at 90 cm from the antenna, behind the case, are shown as well. The points where the fields are sampled to determine the equivalent power density (S) are approximately indicated by

the white dots. A picture of the antenna is not reported because it is identical to the HAE6010A.

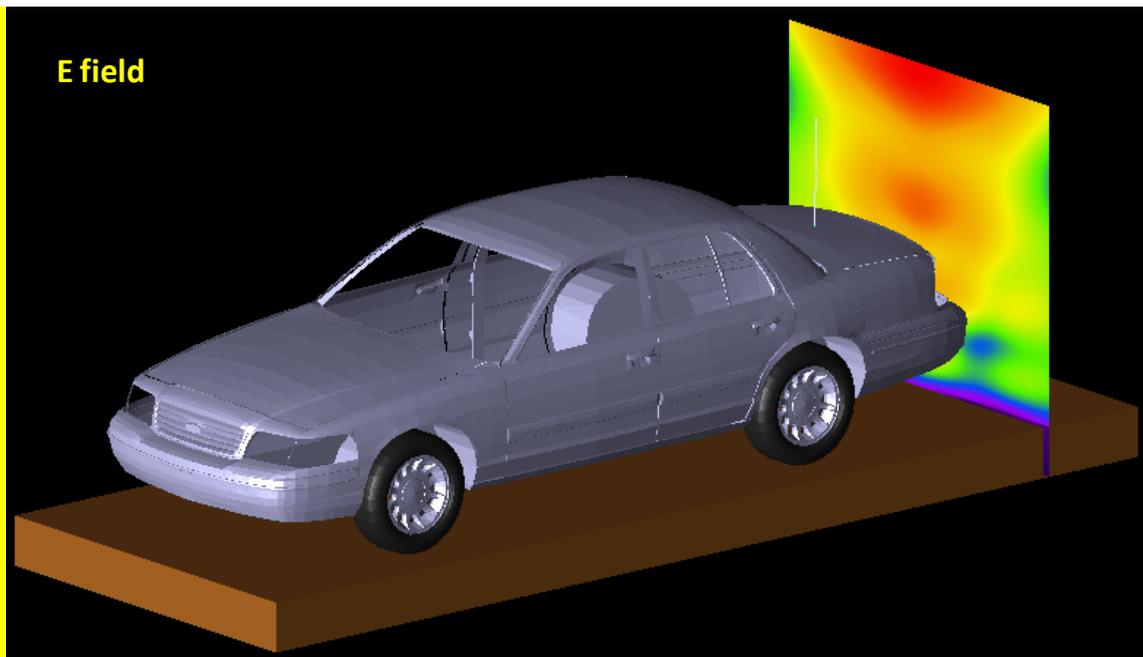


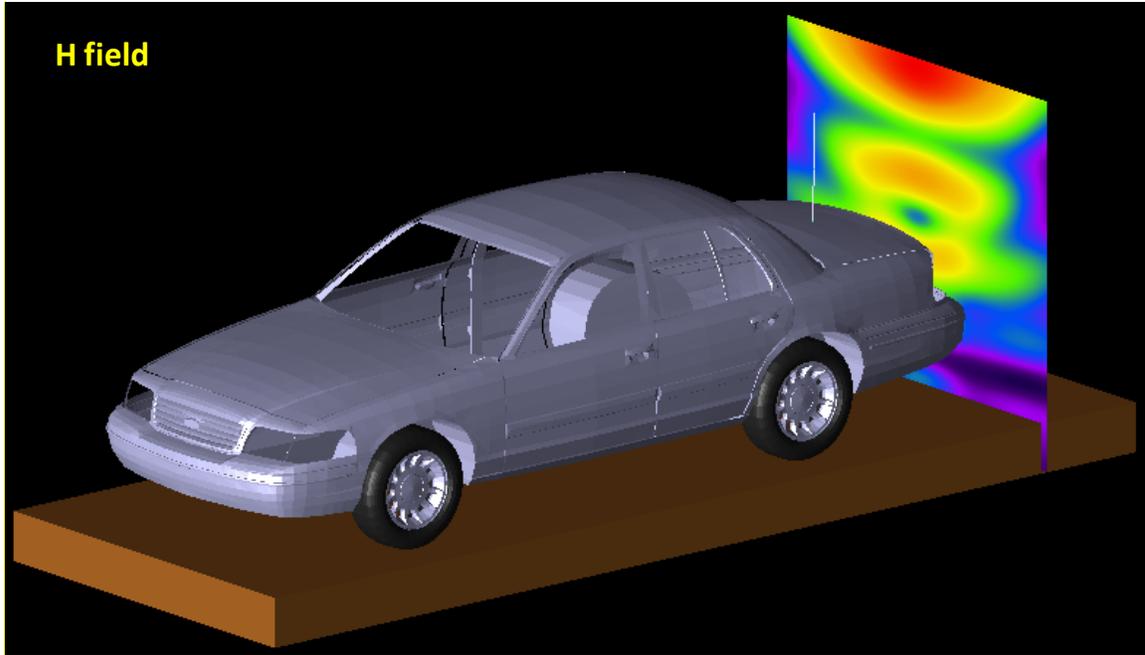

The following table reports the field values computed by XFDTD™ and the corresponding power density values. The average exposure levels are computed as well.

Height (cm)	E (V/m)	S _E (W/m ²)	H (A/m)	S _H (W/m ²)
0	7.55E-02	7.56E-06	4.13E-04	3.21E-05
20	1.79E-01	4.27E-05	2.37E-04	1.06E-05
40	1.56E-01	3.21E-05	5.49E-04	5.69E-05
60	2.12E-01	5.96E-05	4.84E-04	5.69E-05
80	1.78E-01	4.22E-05	5.65E-04	4.42E-05
100	2.07E-01	5.66E-05	3.43E-04	6.03E-05
120	1.99E-01	5.25E-05	5.34E-04	2.21E-05
140	1.70E-01	3.85E-05	4.20E-04	5.37E-05
160	2.18E-01	6.32E-05	5.10E-04	3.33E-05
180	1.80E-01	4.30E-05	8.15E-04	4.90E-05
Average S_E		4.38E-05	Average S_H	4.19E-05

Since the conducted power during the MPE measurement was 123 W the calculated power density was then scaled up for 61.5 W radiated power (taking into account 50% talk time). This model does not include the mismatch loss, loss in the cable and finite conductivity of the car surface and as represents a conservative model for exposure assessment. The scaled-up power density values for 61.5 W radiated power are 4.26 W/m² (E), and 4.07 W/m² (H), that correspond to 0.426 mW/cm² (E), and 0.407 mW/cm² (H). Measurements yielded average power density of 0.204 mW/cm² (E), which shows that the calculated power density is overestimated. The following graph shows a comparison between the measured power density and the simulated one, based on E or H fields, normalized to 61.5 W radiated power.

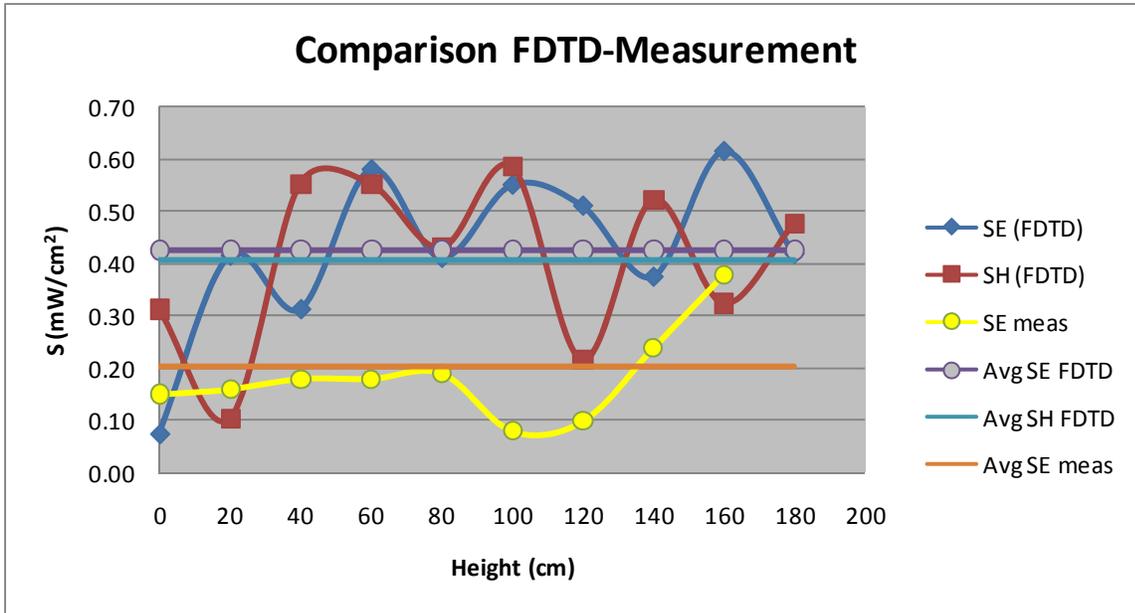


7) Test device positioning

- a) A description of the device test positions used in the SAR computations is provided in the SAR report.
- b) Illustrations showing the separation distances between the test device and the phantom for the tested configurations are provided in the SAR report.

8) Steady state termination procedures

a) The criteria used to determine that sinusoidal steady-state conditions have been reached throughout the computational domain for terminating the computations are based on the monitoring of field points to make sure they converge. The simulation projects were set to automatically track the field values throughout computational domain by means of XFDTD simulation control feature which ensures that “convergence is reached when near-zone data shows a constant amplitude sine wave – when all transients have died down and the only variation left is sinusoidal. In this case “convergence” is tested on the average electric field in the space for its deviation from a pure sine wave. XFDTD automatically places points throughout the space for this purpose.” [XFDTD Reference Manual, version. 6.4 and version 7.2]. This convergence threshold was set to -60 dB.

In addition for at least one passenger and one bystander exposure condition, we placed one “field sensor” near the antenna, others between the body and the domain boundary at different locations, and one inside the head of the model. In all simulations, isotropic E-field sensors were placed at opposite sides of the computational domain. We used isotropic E and H field “sensors”, meaning that all three components of the fields are monitored at these points. The following figures show an example of the time waveforms at the field point sensors in two points of the computational domain. We selected points close to antenna as well as furthest one. The highest field levels are observed for the higher index point, as it is closer to the antenna. In all cases, the field reaches the steady-state condition.

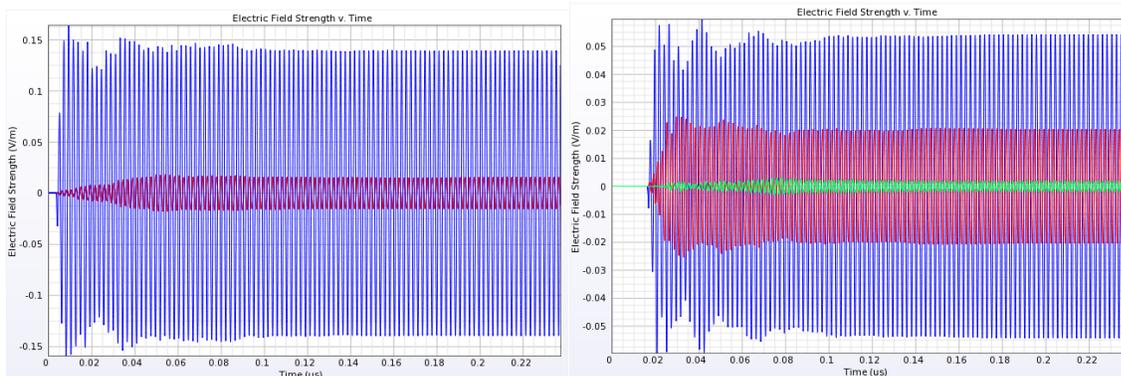

c) The XFDTD™ algorithm determines the field phasors by using the so-called “two-equations two-unknowns” method. Details of the algorithm are explained in [7].

9) Computing peak SAR from field components

a) The SAR for an individual voxel is computed according to the draft IEEE 62704-1 standard. In particular, the three components of the electric field are computed in the center of each voxel and then the SAR is computed as below:

$$SAR = \sigma_{voxel} \frac{|E_x|^2 + |E_y|^2 + |E_z|^2}{2\rho_{voxel}},$$

where σ_{voxel} and ρ_{voxel} are the conductivity and the mass density of the voxel.

10) One-gram averaged SAR procedures

a) XFDTD™ computes the Specific Absorption Rate (SAR) in each complete cell containing lossy dielectric material and with a non-zero material density. Using the SAR values computed for each voxel of the model the averaging calculation employs the method and specifications defined in the draft IEEE 62704-1 standard to generate one-gram and ten-gram average SAR.

11) Total computational uncertainty – We derived an estimate for the uncertainty of FDTD methods in evaluating SAR by referring to [6]. In Fig. 7 in [6] it is shown that the deviation between SAR estimates using the XFDTD™ code and those measured with a compliance system are typically within 10% when the probe is away from the phantom surface so that boundary effects are negligible. In that example, the simulated SAR always exceeds the measured SAR.

As discussed in 6(a), a conservative bias has been introduced in the model so as to reduce concerns regarding the computational uncertainty related to the car modeling, antenna modeling, and phantom modeling. The results of the comparison between measurements and simulations presented in 6(a) suggest that the present model produces an overestimate of the exposure between 4% and 36%. Such a conservative bias should eliminate the need for including uncertainty considerations in the SAR assessment.

12) Test results for determining SAR compliance

a) Illustrations showing the SAR distribution of dominant peak locations produced by the test transmitter, with respect to the phantom and test device, are provided in the SAR report.

b) The input impedance and the total power radiated under the impedance match conditions that occur at the test frequency are provided by XFDTD™. XFDTD™ computes the input impedance by following the method outlined in [8], which consists in performing the integration of the steady-state magnetic field around the feed point edge to compute the steady-state feed point current (I), which is then used to divide the feed-gap steady-state voltage (V). The net average radiated power is computed as

$$P_{XFDTD} = \frac{1}{2} \operatorname{Re} \{VI^*\}$$

Both the input impedance and the net average radiated power are provided by XFDTD™ at the end of each individual simulation.

We normalize the SAR to such a power, thereby obtaining SAR per radiated Watt (*normalized SAR*) values for the whole body and the 1-g SAR. Finally, we multiply such normalized SAR values times the max power rating of the device under test. In this way, we obtain the exposure metrics for 100% talk-time, i.e., without applying source-based time averaging.

c) For mobile radios, 50% source-based time averaging is applied by multiplying the SAR values determined at point 12(b) times a 0.5 factor.

REFERENCES

[1] K. S. Yee, "Numerical Solution of Initial Boundary Value Problems Involving Maxwell's Equations in Isotropic Media," *IEEE Transactions on Antennas and Propagation*, vol. 14, no. 3, 302-307, March 1966.

[2] Z. P. Liao, H. L. Wong, G. P. Yang, and Y. F. Yuan, "A transmitting boundary for transient wave analysis," *Scientia Sinica*, vol. 28, no. 10, pp 1063-1076, Oct. 1984.

[3] Validation exercise: Mie sphere. Remcom Inc. (enclosed PDF)



Remcom.pdf

[4] NEC-Win PRO™ v 1.1, Nittany Scientific, Inc., Riverton, UT.

[5] C. M. Collins and M. B. Smith, "Calculations of B1 distribution, SNR, and SAR for a surface coil against an anatomically-accurate human body model," *Magn. Reson. Med.*, 45:692-699, 2001. (enclosed TIF)



Collins & Smith.pdf

[6] Martin Siegbahn and Christer Törnevik, "Measurements and FDTD Computations of the IEEE SCC 34 Spherical Bowl and Dipole Antenna," Report to the IEEE Standards Coordinating Committee 34, Sub-Committee 2, 1998. (enclosed PDF)



Ericsson.pdf

[7] C. M. Furse and O. P. Gandhi, "Calculation of electric fields and currents induced in a millimeter-resolution human model at 60 Hz using the FDTD method with a novel time-to-frequency-domain conversion," Antennas and Propagation Society International Symposium, 1996. (enclosed PDF)



Furse & Gandhi.pdf

[8] *The Finite Difference Time Domain Method for Electromagnetics*, Chapter 14.2, by K. S. Kunz and R. J. Luebbers, CRC Press, Boca Raton, Florida, 1993.

[9] *Validation of Mobile Antenna Modeling by Comparison with Near-field Measurements*," Report to the IEEE Standards Coordinating Committee 34, Sub-Committee 2, 2006. (enclosed PDF)



IEEE1528_2_vld.pdf

[10] *Antenna Theory: analysis and design*, Chapter 4, by C. A. Balanis, 2nd ed. John Wiley & Sons, Inc.

[11] S. Gabriel, R. W. Lau, and C. Gabriel. 1996. The dielectric properties of biological tissues: III. Parametric models for the frequency spectrum of tissues. *Phys. Med. Biol.* 41:2271–2293.