

# TEST REPORT

**Report No.** .....: **KS2206S2710E02**  
**FCC ID**.....: **2A54U-DT3PROMAX**  
**Applicant**.....: **Shenzhen Xinkeying Technology Co.,Ltd**  
**Address**.....: 8/F,Block C,Han's Innovation Building,Xili Road, Nanshan District,Shenzhen,China  
**Manufacturer**.....: Shenzhen Xinkeying Technology Co.,Ltd  
**Address**.....: 8/F,Block C,Han's Innovation Building,Xili Road, Nanshan District,Shenzhen,China  
**Factory**.....: Shenzhen Xinkeying Technology Co.,Ltd  
**Address**.....: 8/F,Block C,Han's Innovation Building,Xili Road, Nanshan District,Shenzhen,China  
**Product Name**.....: **Smart watch**  
**Trade Mark**.....: DTNO.1  
**Model/Type reference**.....: DT3Promax  
**Listed Model(s)** .....: DT3Promax+,DT3Pro+,DT3+,DT3max+  
**Standard**.....: **FCC 15.247**  
**Date of receipt of test sample**...: June. 22, 2022  
**Date of testing**.....: June. 22, 2022~July.05, 2022  
**Date of issue**.....: July.05, 2022  
**Test Result**.....: **Pass**


Prepared by:  
( Printed name+ signature)

Sky Dong



Approved by:  
( Printed name + Signature )

Neil Wan



**Testing Laboratory Name**.....: **KSIGN(Guangdong) Testing Co., Ltd.**

Address.....: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**TABLE OF CONTENTS**

	Page
<b>1. TEST SUMMARY .....</b>	<b>3</b>
1.1. TEST STANDARDS .....	3
1.2. REPORT VERSION .....	3
1.3. TEST DESCRIPTION .....	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY .....	6
1.6. ENVIRONMENTAL CONDITIONS .....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. GENERAL DESCRIPTION OF EUT .....	7
2.2. OPERATION STATE .....	8
2.3. MEASUREMENT INSTRUMENTS LIST.....	9
2.4. TEST SOFTWARE .....	10
<b>3. TEST ITEM AND RESULTS .....</b>	<b>11</b>
3.1. ANTENNA REQUIREMENT .....	11
3.2. PEAK OUTPUT POWER.....	12
3.3. 20DB BANDWIDTH .....	19
3.4. CARRIER FREQUENCIES SEPARATION .....	32
3.5. NUMBER OF HOPPING CHANNEL .....	35
3.6. DWELL TIME.....	38
3.7. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED) .....	41
3.8. BAND EDGE EMISSIONS(RADIATED).....	48
3.9. RADIATED SPURIOUS EMISSIONS.....	57
3.10. CONDUCTED EMISSION.....	68
<b>4. EUT TEST PHOTOS .....</b>	<b>71</b>
<b>5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....</b>	<b>73</b>

## 1. TEST SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**KDB 558074 D01 15.247 Meas Guidance v05r02:** The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz, 2400-2483.5 MHz and/or 5725-5850 MHz bands under §15.247 of the FCC rules (Title 47 of the Code of Federal Regulations).

**ANSI C63.10-2020:** American National Standard for Testing Unlicensed Wireless Devices.

### 1.2. Report version

Revised No.	Date of issue	Description
01	July.05, 2022	Original

### 1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Cyril Cai
Conducted Emission	15.207	Pass	Cyril Cai
Radiated Emission	15.205&15.209	Pass	Cyril Cai
Radiated Band Edge	15.205&15.247(d)	Pass	Cyril Cai
Peak Output Power	15.247(b)	Pass	Cyril Cai
Power Spectral Density	15.247(e)	Pass	Cyril Cai
6dB Bandwidth	15.247(a)(2)	Pass	Cyril Cai
Duty Cycle	558074 D01 15.247 Meas Guidance v05r02 Chapter 6	Pass	Cyril Cai
Conducted Band edge	15.247(d)	Pass	Cyril Cai
Spurious RF Conducted Emission	15.247(d)	Pass	Cyril Cai
Antenna Requirement	15.203	Pass	Cyril Cai

Note:

The measurement uncertainty is not included in the test result.

## 1.4. Test Facility

### Address of the report laboratory

#### **KSIGN(Guangdong) Testing Co., Ltd.**

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L13261**

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 5457.01**

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **ISED#: 25693 CAB identifier.: CN0096**

KSIGN(Guangdong) Testing Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

#### **FCC-Registration No.: 294912 Designation Number: CN1328**

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

**Note (1):** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

## 2. GENERAL INFORMATION

### 2.1. General Description of EUT

Test Sample Number:	1-1-1(Normal Sample),1-1-2(Engineering Sample )
Product Name:	Smart watch
Trademark:	DTNO.I
Model/Type reference:	DT3Promax
Listed Model(s):	DT3Promax+,DT3Pro+,DT3+,DT3max+
Model Difference:	The difference between the product model is only the appearance is not the same, the different model name is for the market demand. Other power supply mode, internal structure, circuit and key components are the same, does not affect the safety and electromagnetic compatibility performance.
Power supply:	Input : DC 5V
Power supply(Battery):	DC 3.7V
Hardware version:	V1.0
Software version:	V1.0.0
<b>Bluetooth</b>	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Max Peak Output Power:	DH5 : -4.3dBm 2DH5 : -4.5dBm 3DH5 : -4.43dBm
Channel number:	79
Channel separation:	1MHz
Antenna type:	Internal Antenna
Antenna gain:	-0.7dBi

## 2.2. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

Note: The display in gray were the channel selected for testing.

Test mode

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode $\pi/4$ -DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The test software is the Blue Test 3 which can set the EUT into the individual test modes.

## 2.3. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
2	Vector Signal Generator	Agilent	N5182A	MY50142520	03/04/2023
3	Analog Signal Generator	HP	83752A	3344A00337	03/04/2023
4	Power Sensor	Agilent	E9304A	MY50390009	03/04/2023
5	Power Sensor	Agilent	E9300A	MY41498315	03/04/2023
6	Wideband Radio Communication Tester	R&S	CMW500	157282	03/04/2023
7	Climate Chamber	Angul	AGNH80L	1903042120	03/04/2023
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	03/04/2023
9	RF Control Unit	Tonscend	JS0806-2	/	03/04/2023

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	03/04/2023
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/04/2023
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/04/2023
4	Spectrum Analyzer	HP	8593E	3831U02087	03/04/2023
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	12/04/2023
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	03/04/2023
7	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	03/04/2023
10	Pre-Amplifier	EMCI	EMC051835SE	980662	03/04/2023
11	Pre-Amplifier	Schwarzbeck	BBV-9721	57	03/04/2023
12	Horn Antenna	Schwarzbeck	BBHA 9170	00939	03/04/2023

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV432	1326.6105.02	03/04/2023
2	EMI Test Receiver	R&S	ESR	102524	03/04/2023
3	Manual RF Switch	JS TOYO	/	MSW-01/002	03/04/2023

Note:

- 1)The Cal. Interval was one year.
- 2)The cable loss has calculated in test result which connection between each test instruments.

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

## 2.4. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.577.0418

### 3. TEST ITEM AND RESULTS

#### 3.1. Antenna requirement

##### Requirement

###### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

###### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

##### Test Result


The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

## 3.2. Peak Output Power

### Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

### Test Configuration




### Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=10 MHz for bandwidth more than 1MHz.

### Test Mode


Please refer to the clause 2.2

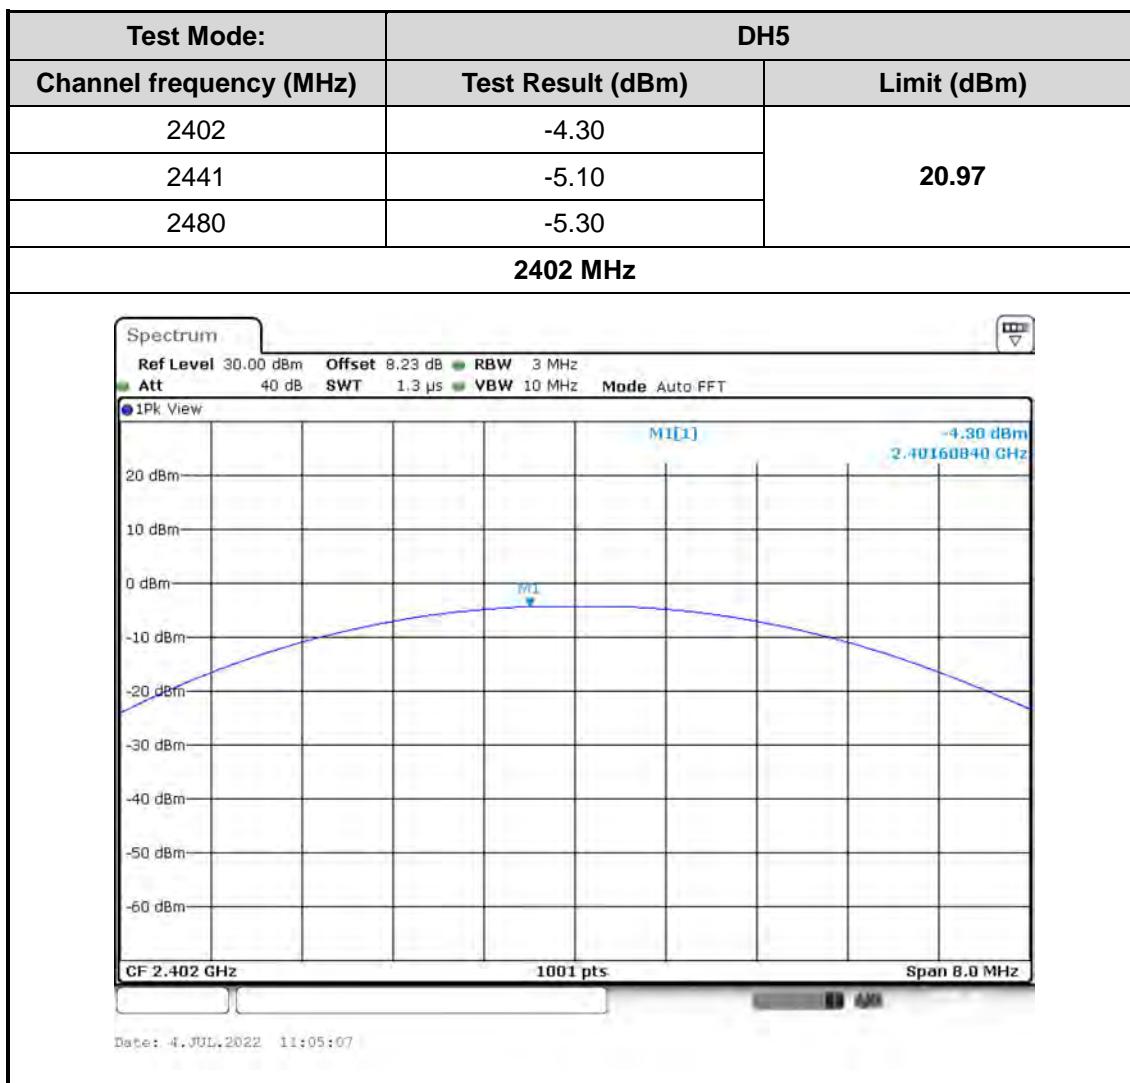
Test Result


TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

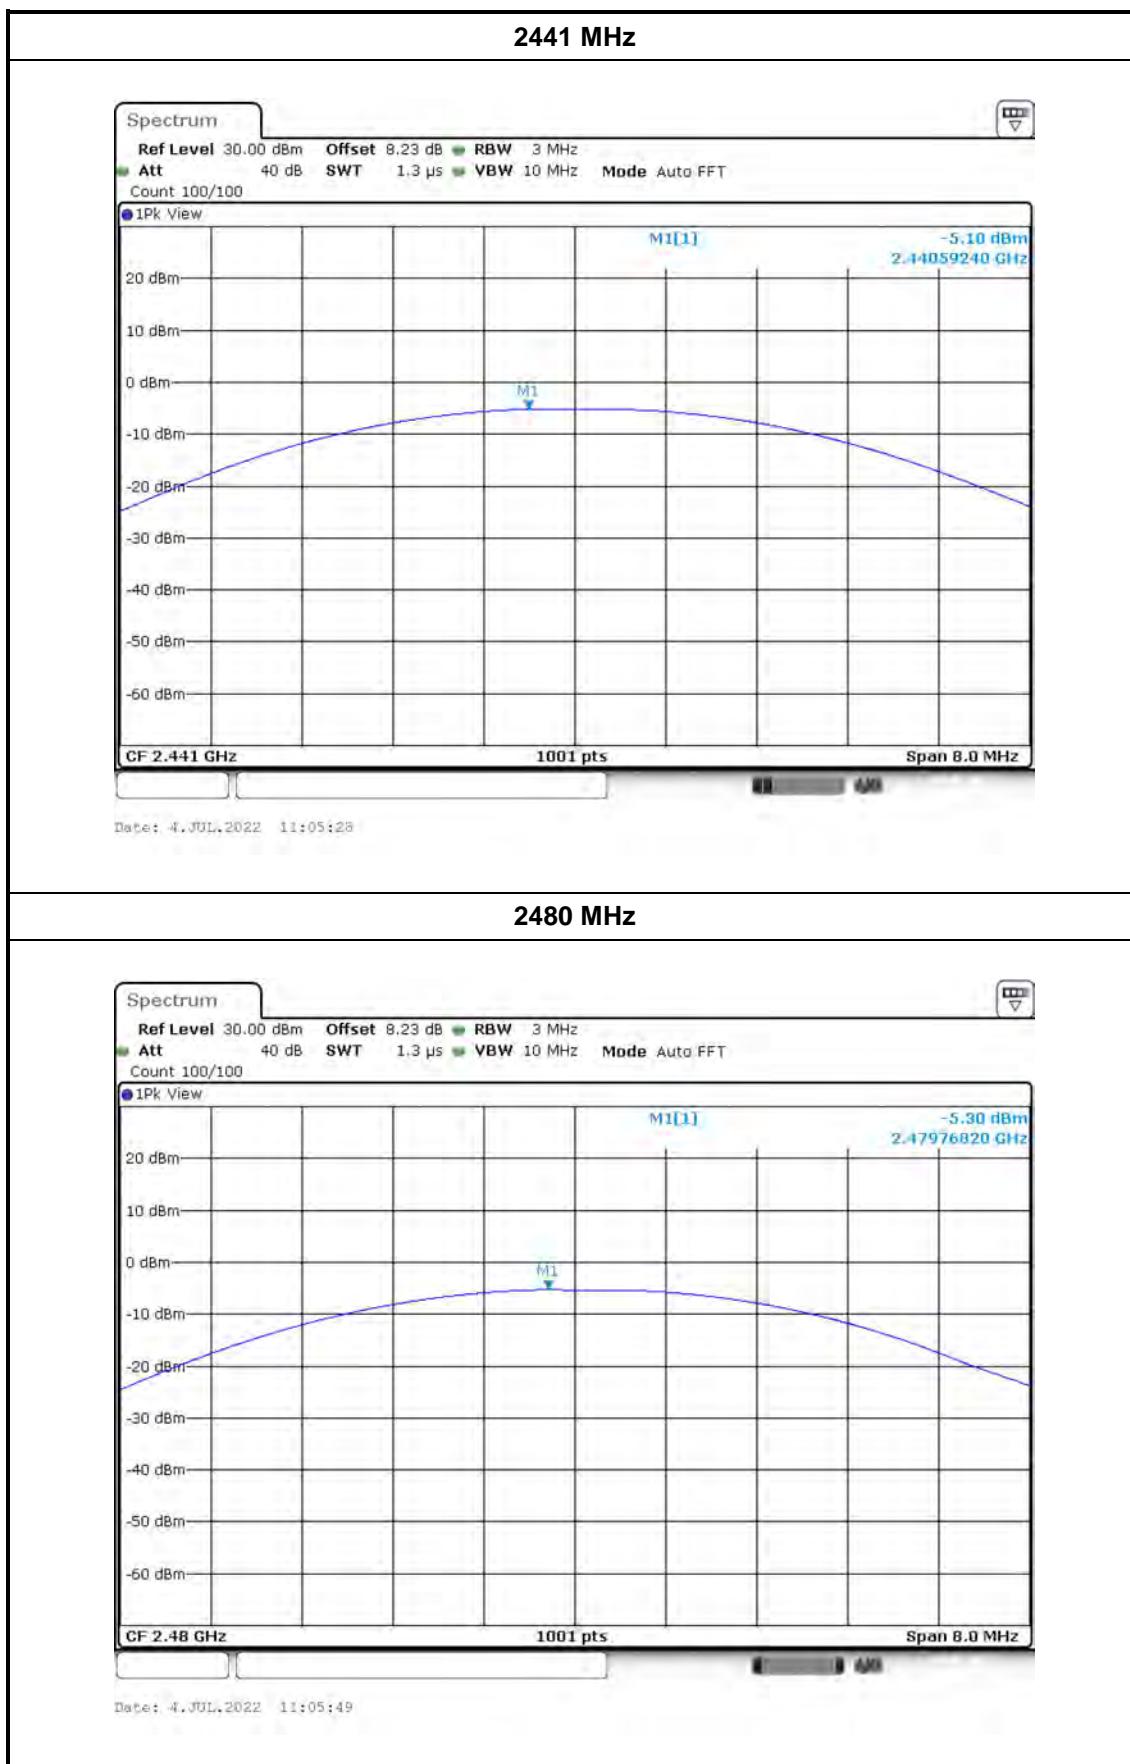

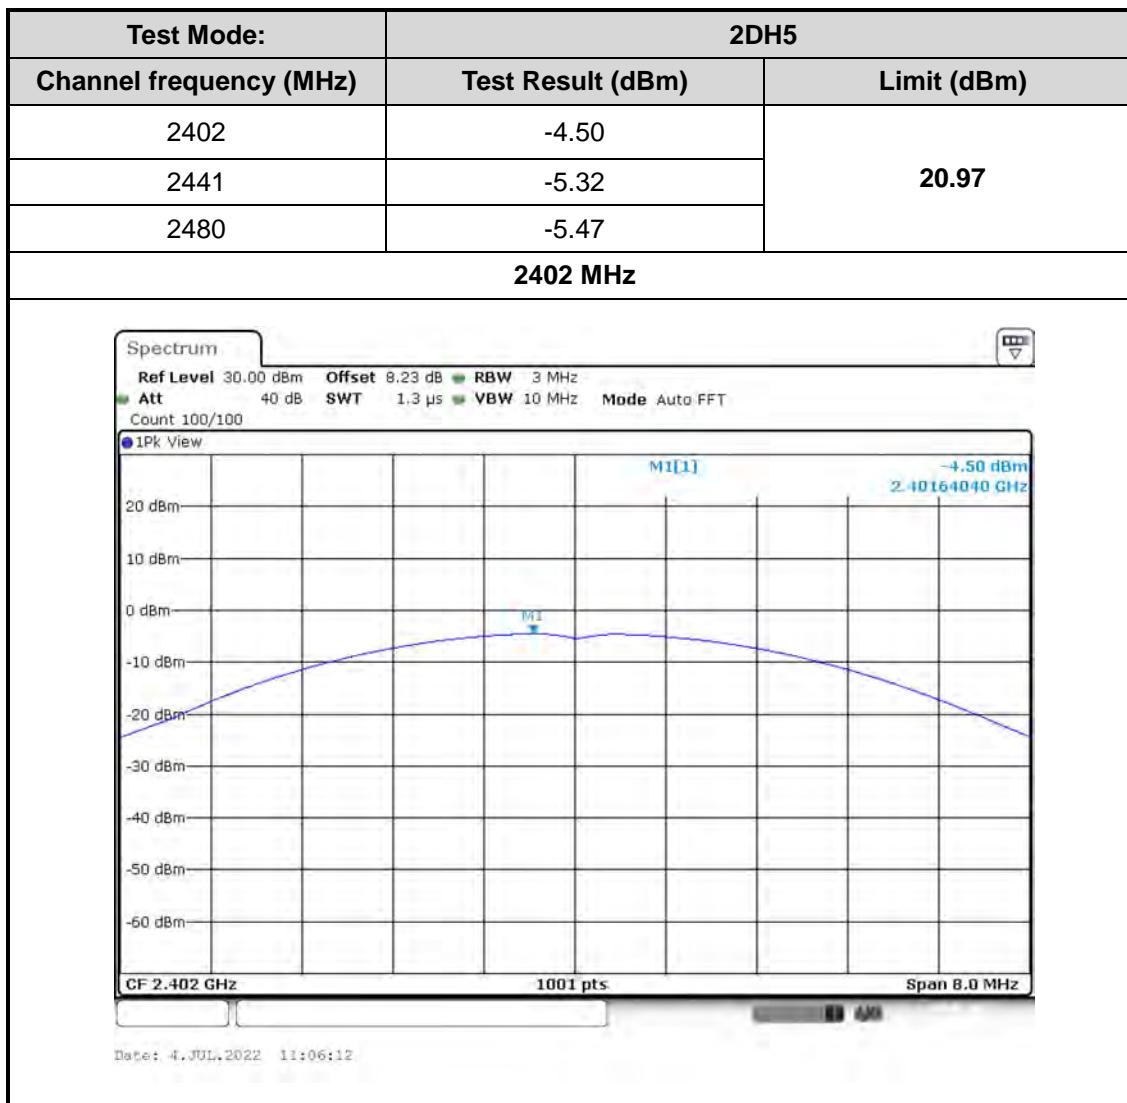


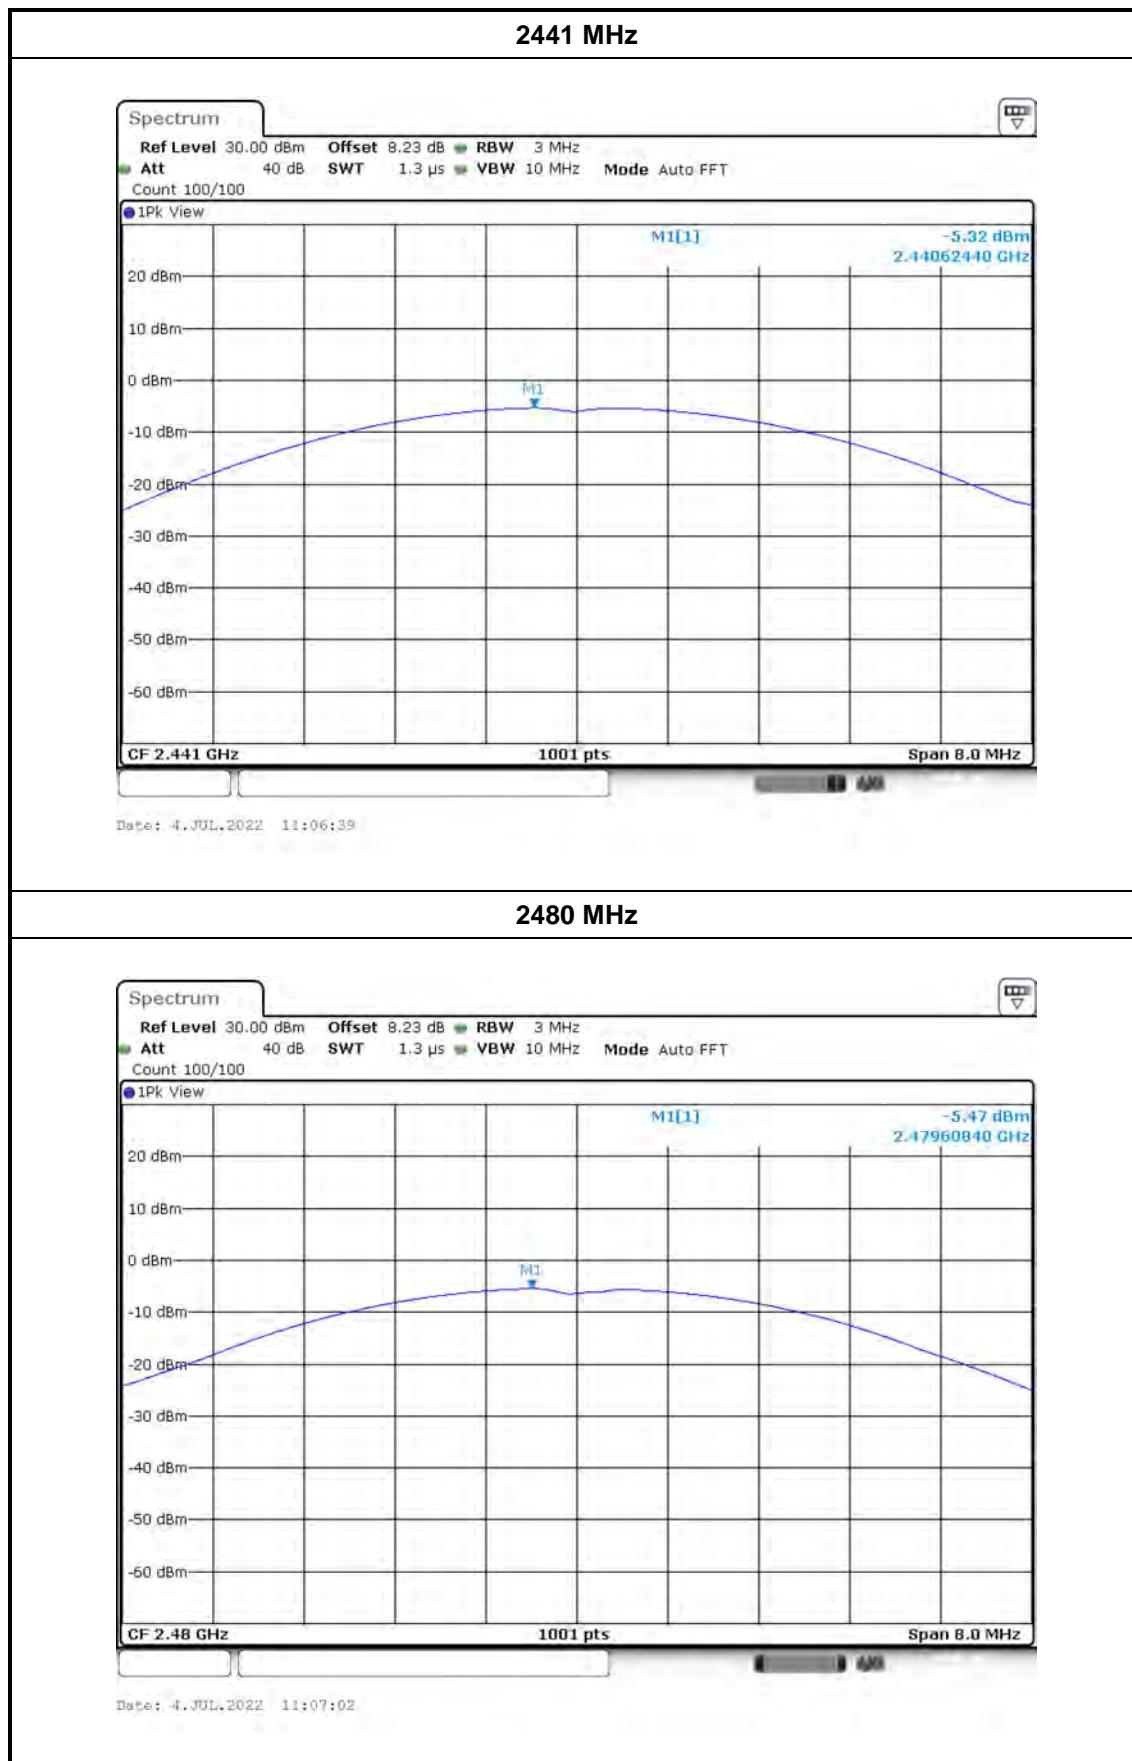

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

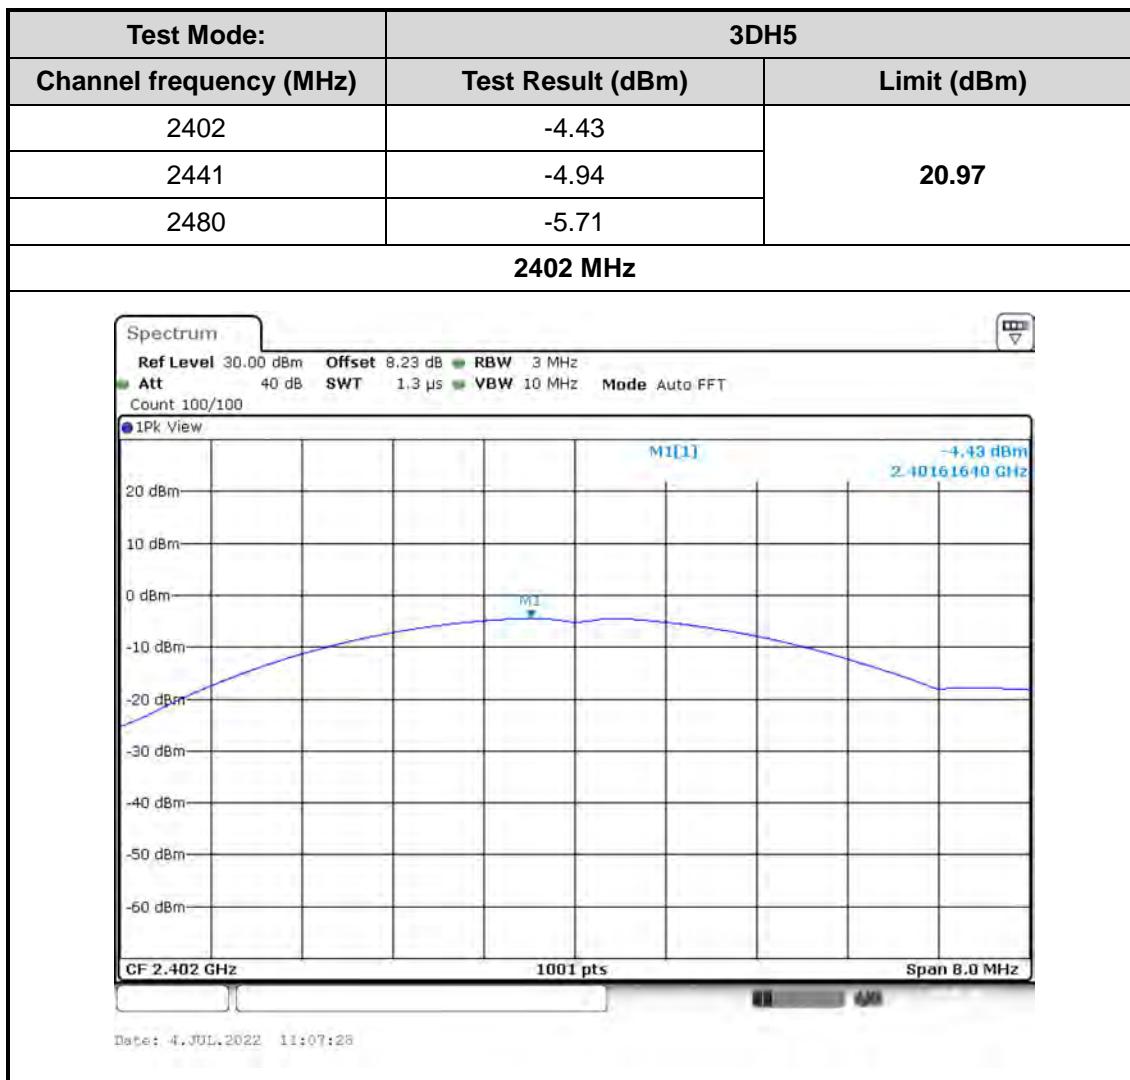




### 3.3. 20dB Bandwidth

#### Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	N/A	2400~2483.5

#### Test Configuration

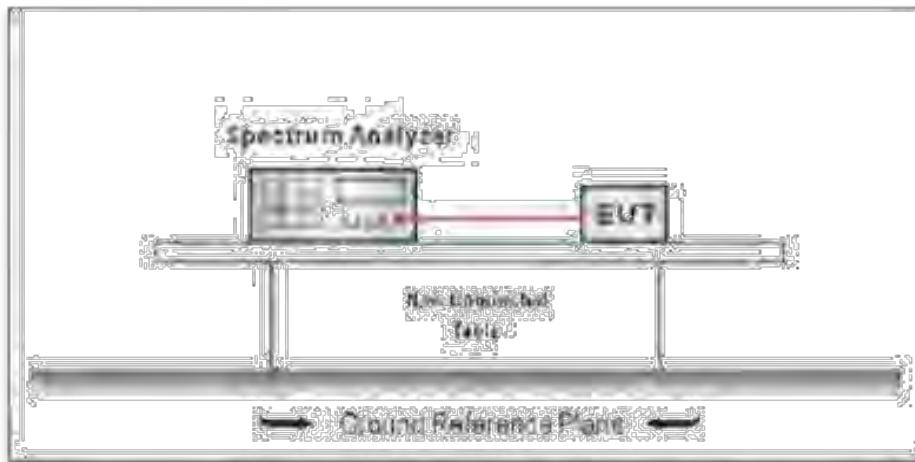


#### Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
  - (1) Set RBW = 30 kHz.
  - (2) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

#### Test Mode


Please refer to the clause 2.2.

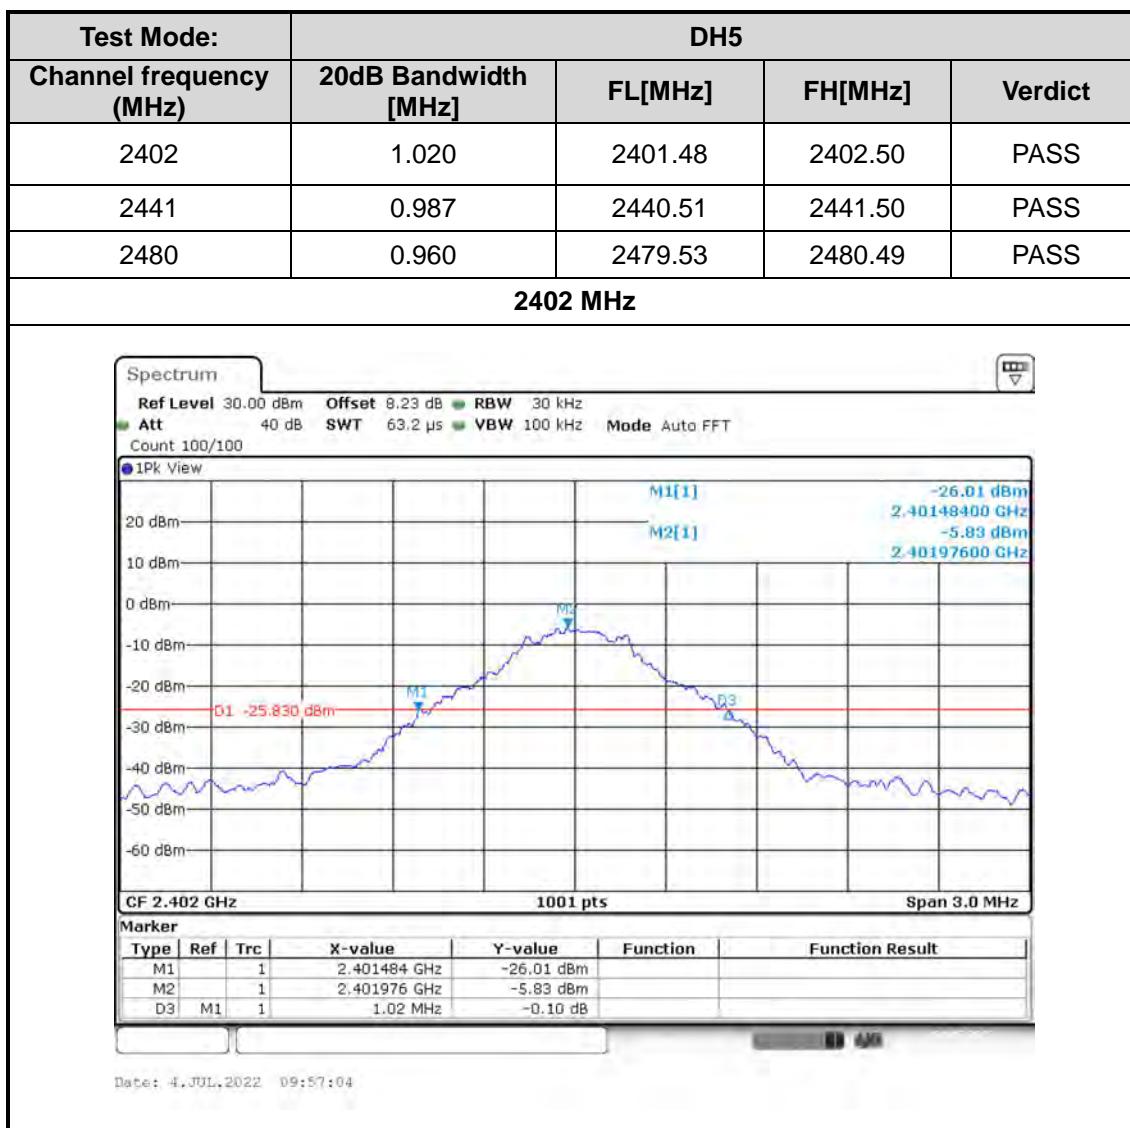
Test Results


TRF No. FCC Part 15.247\_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

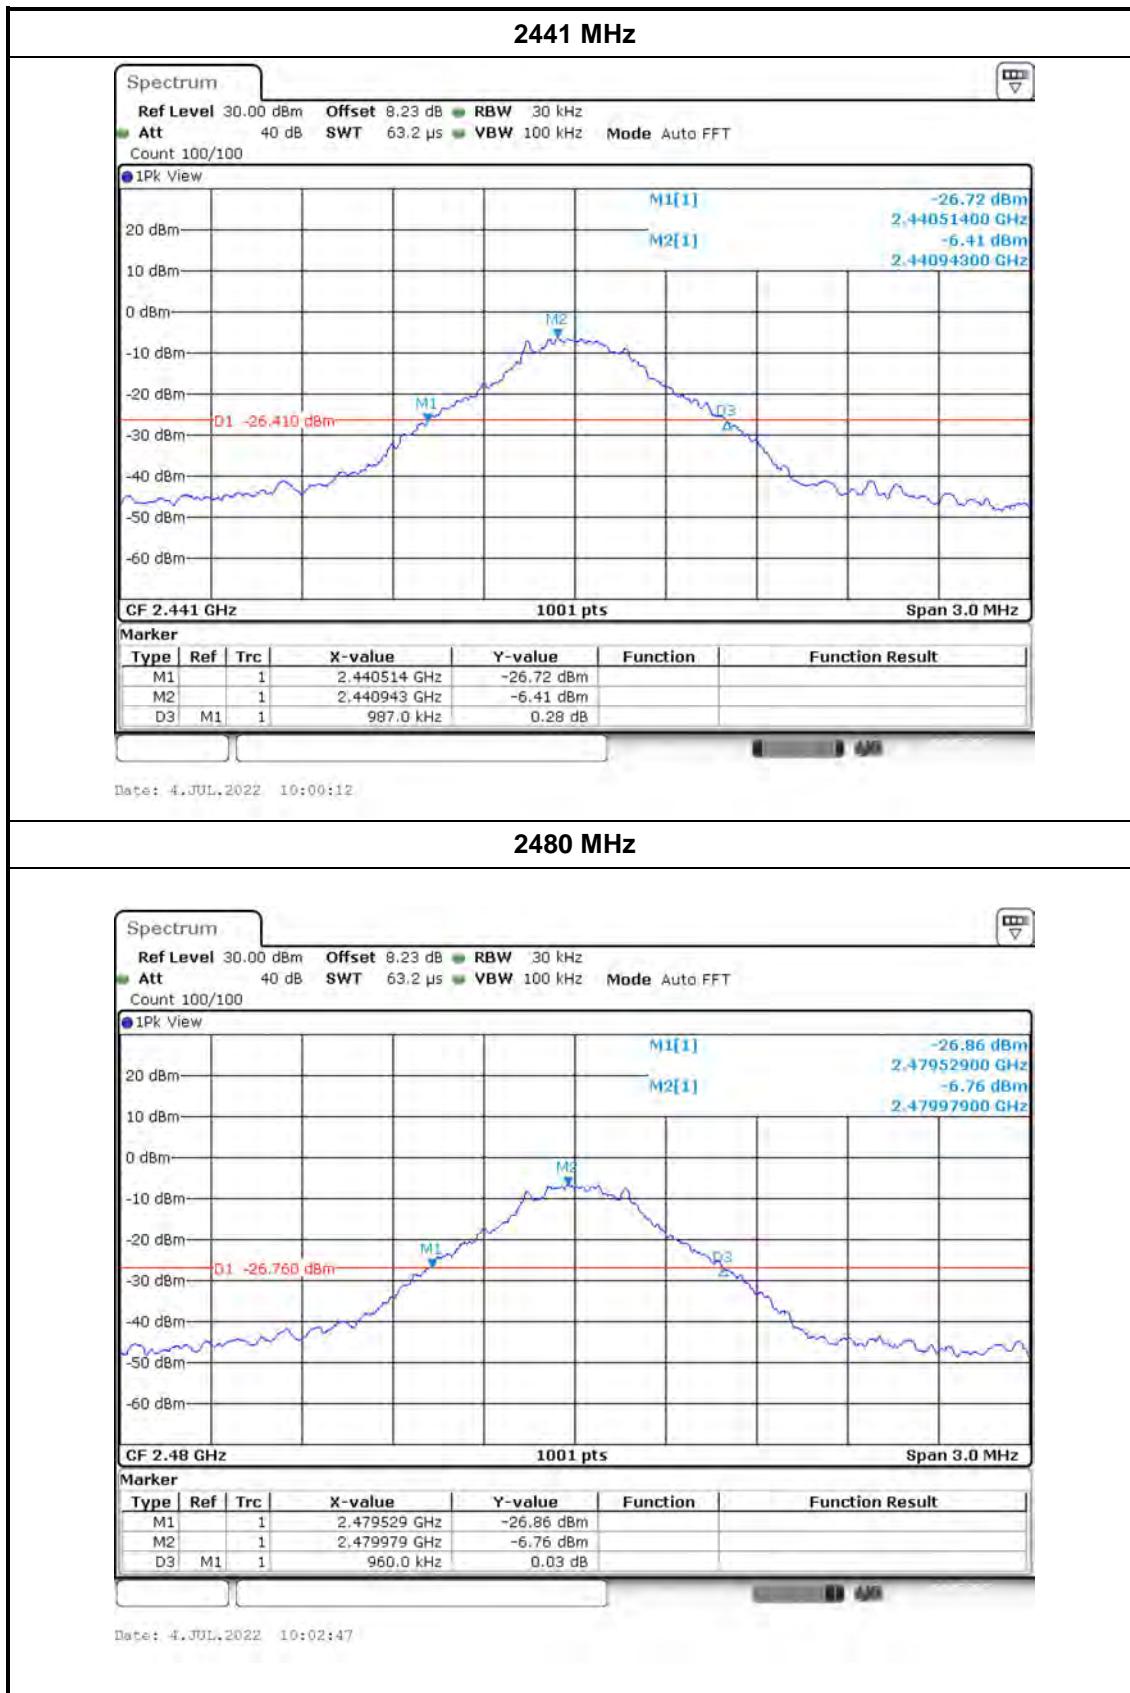


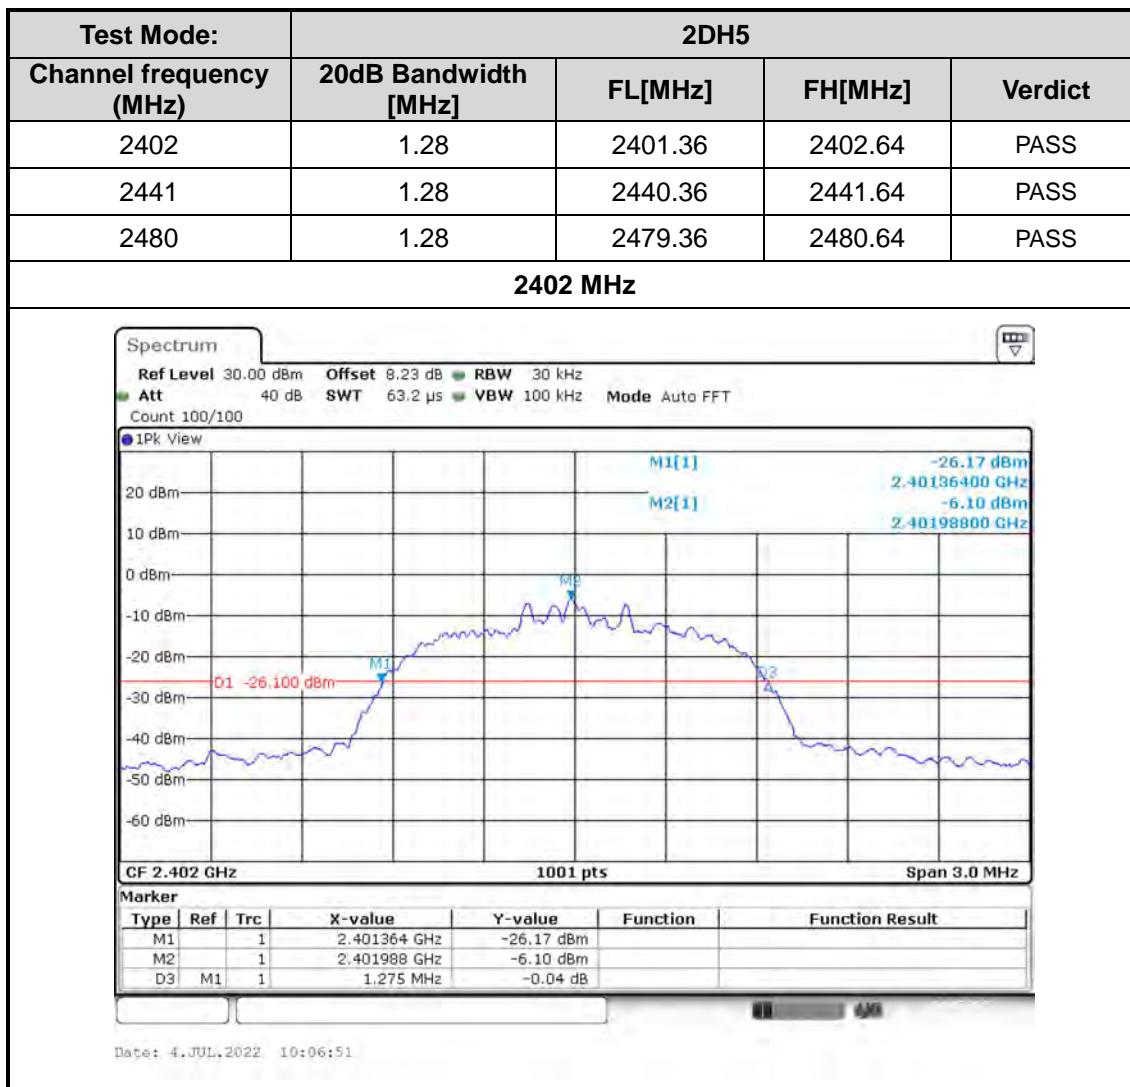


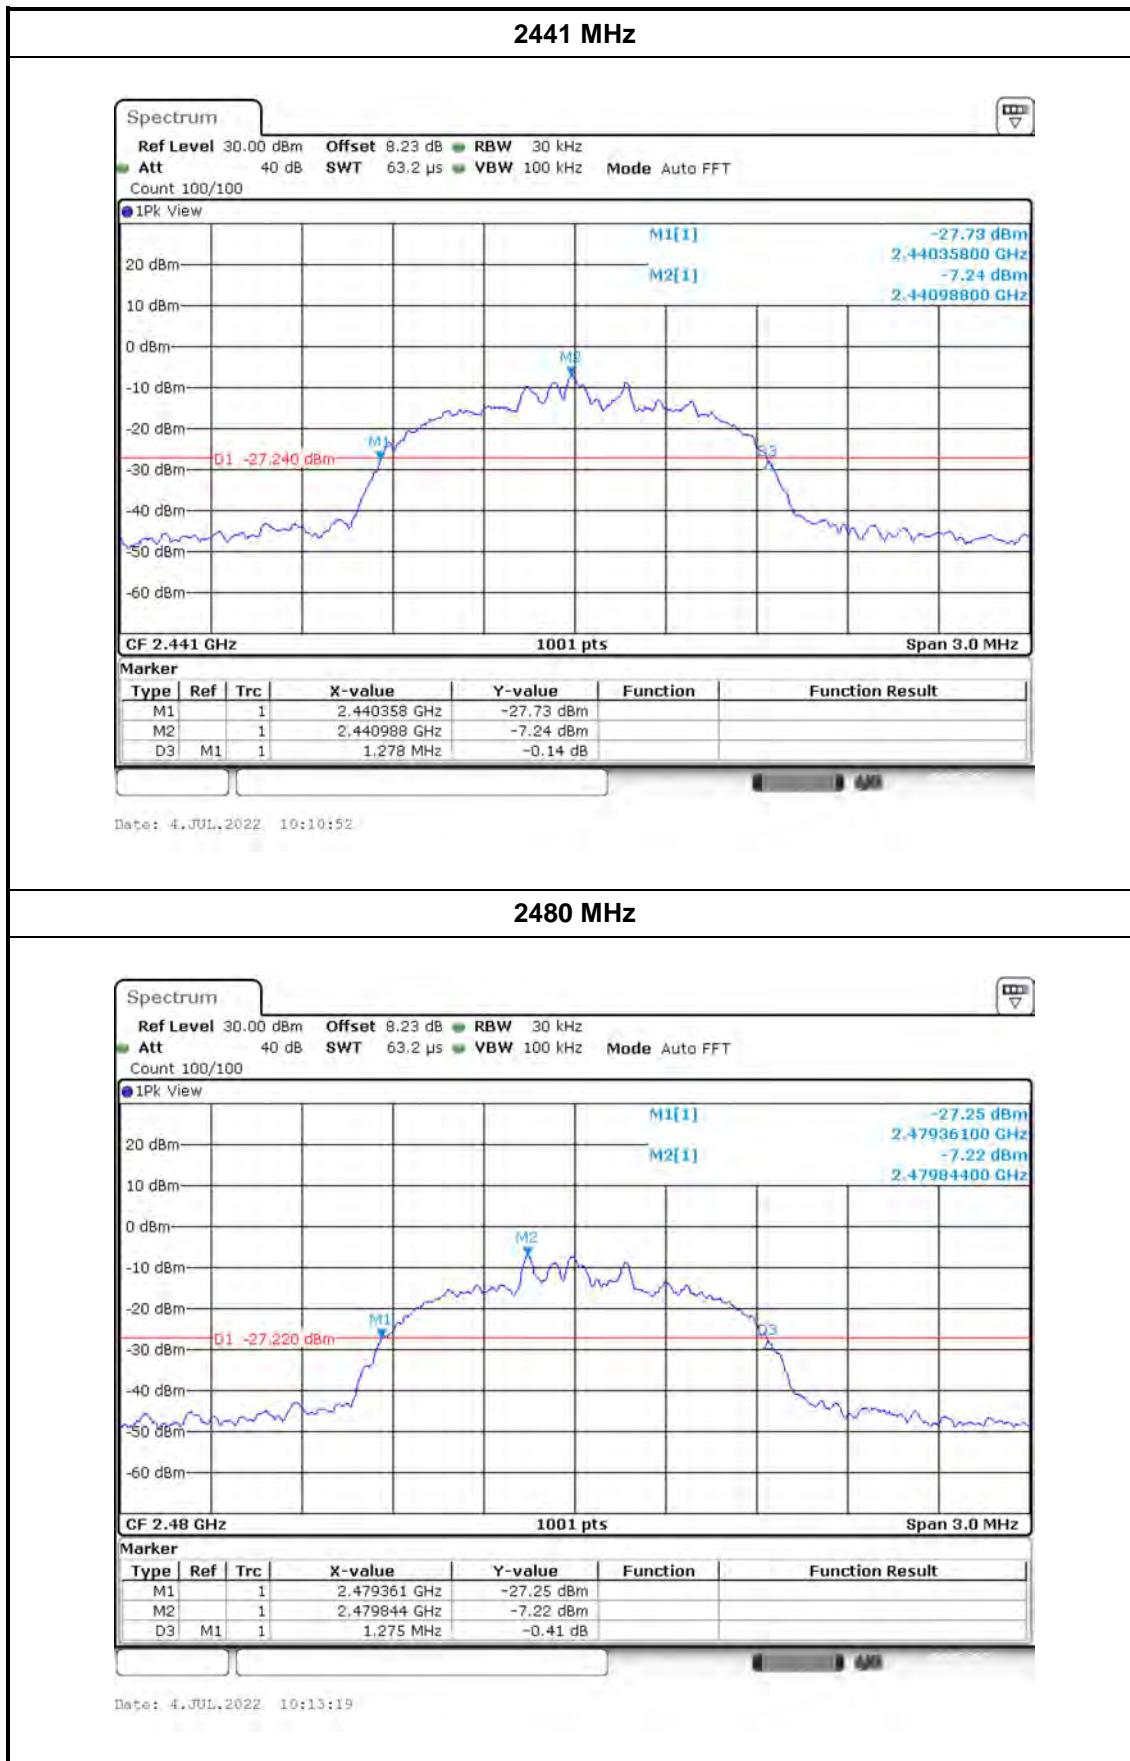


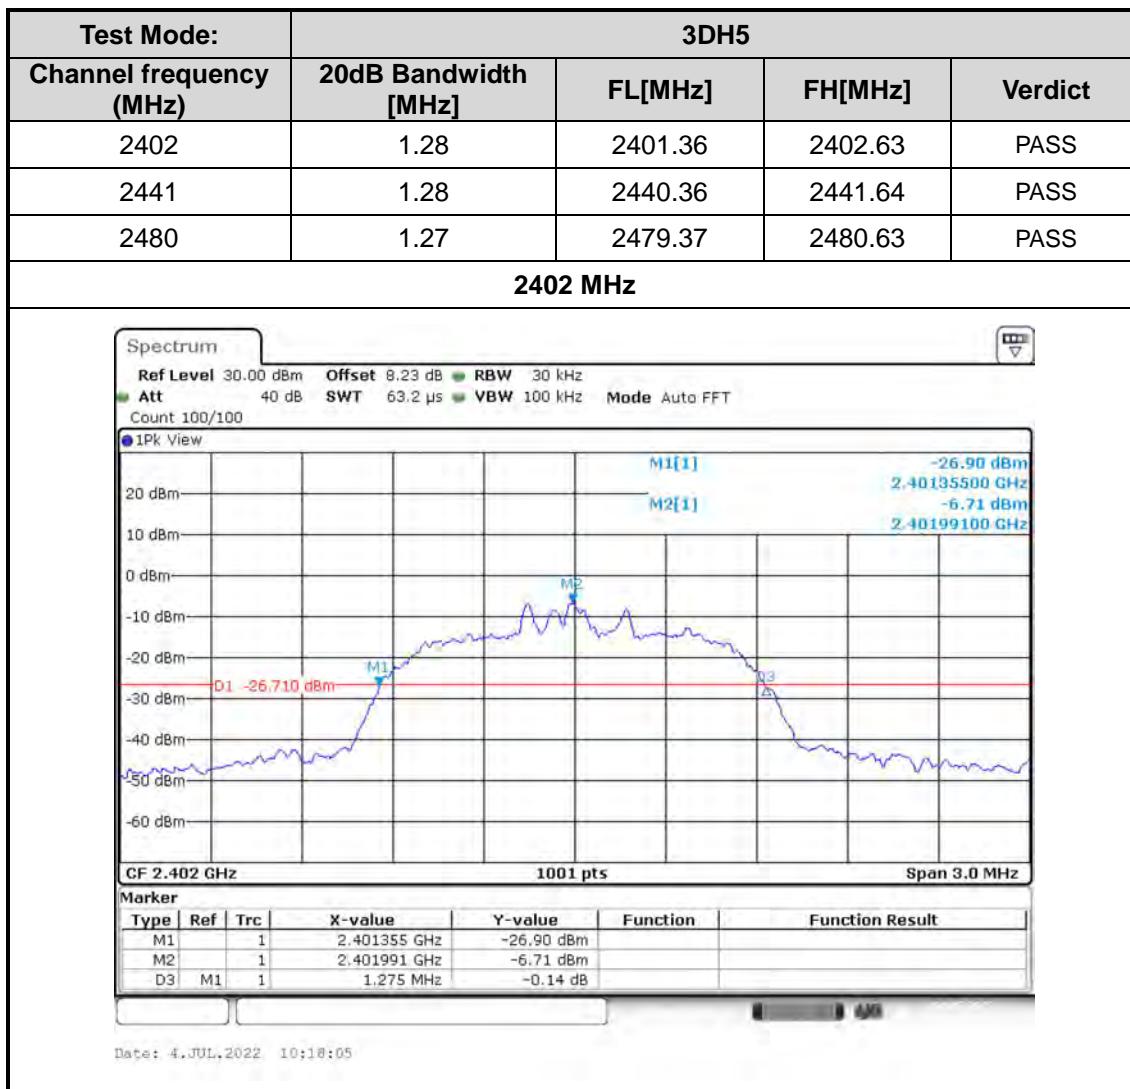


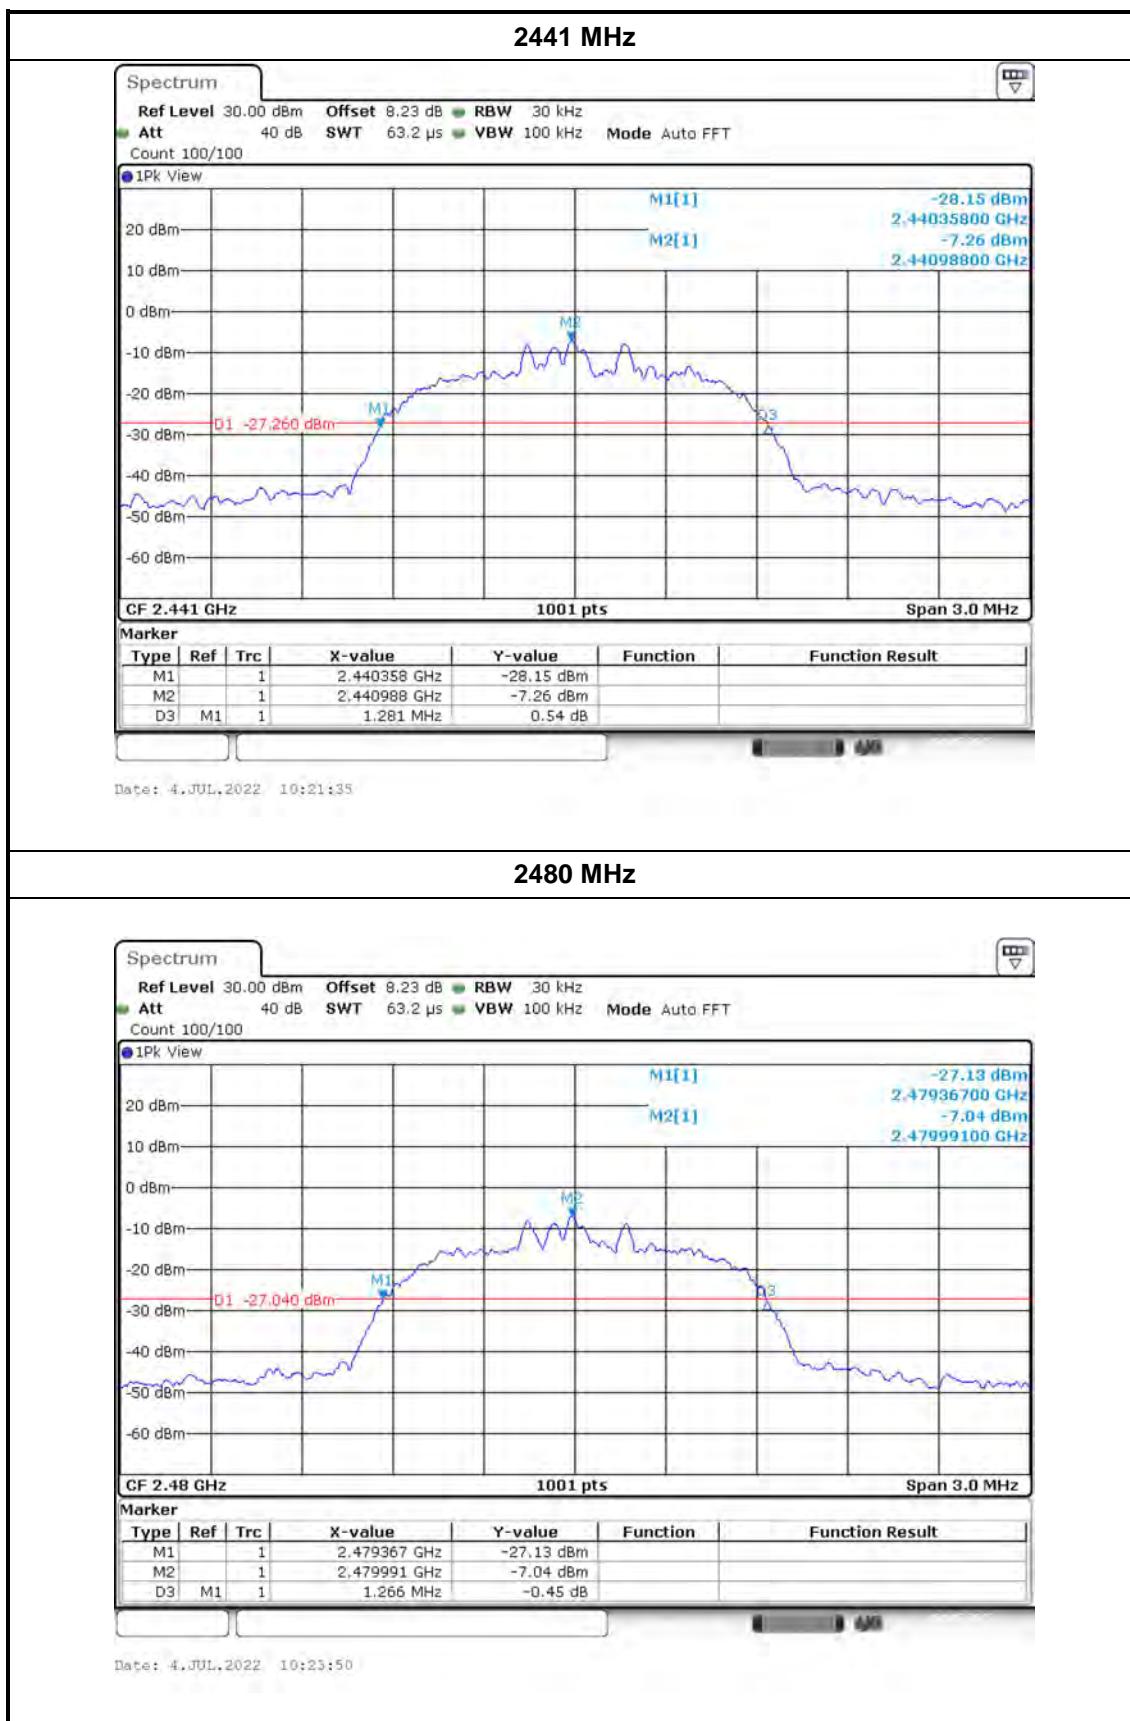


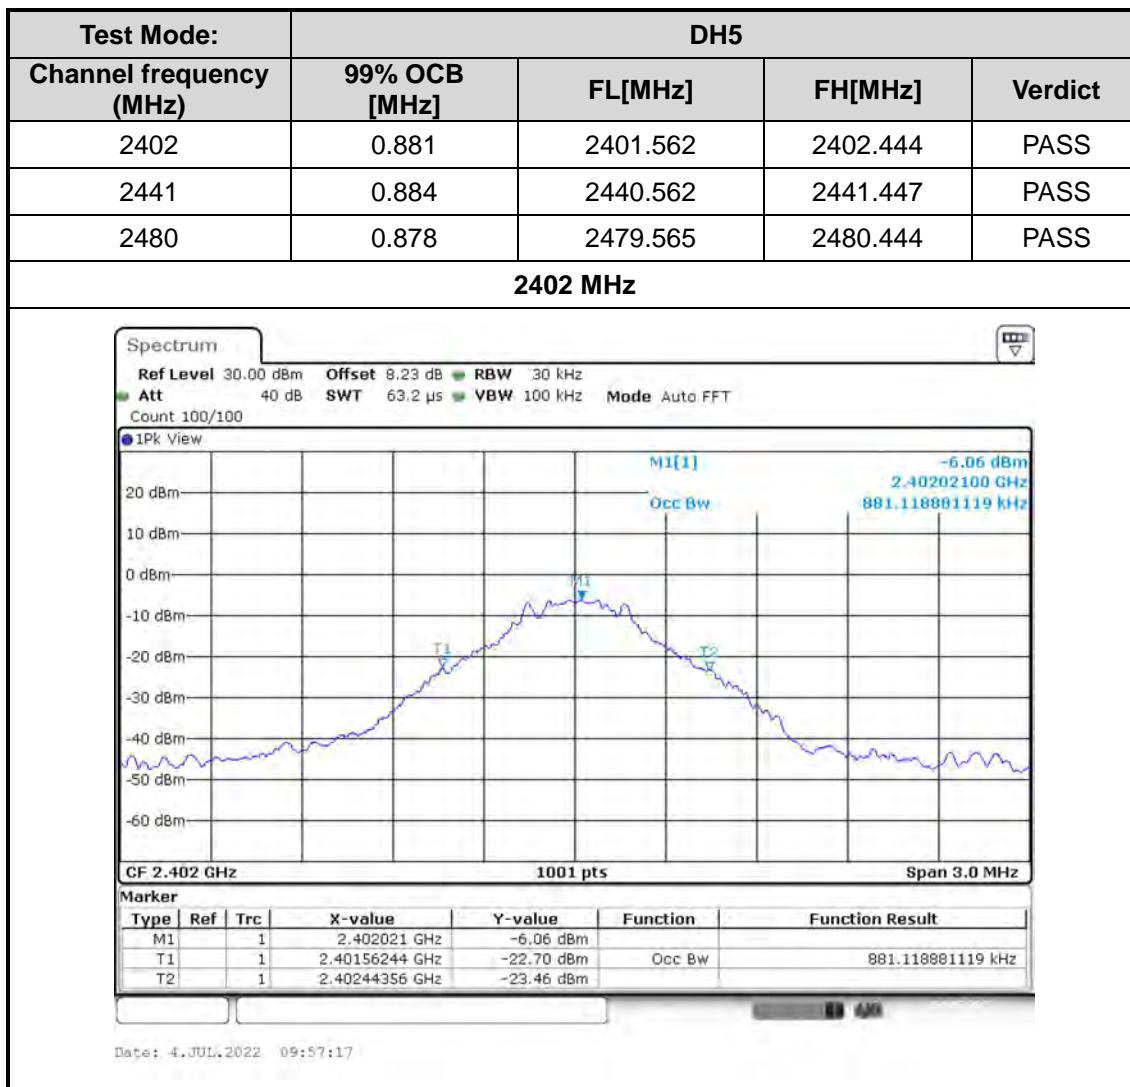


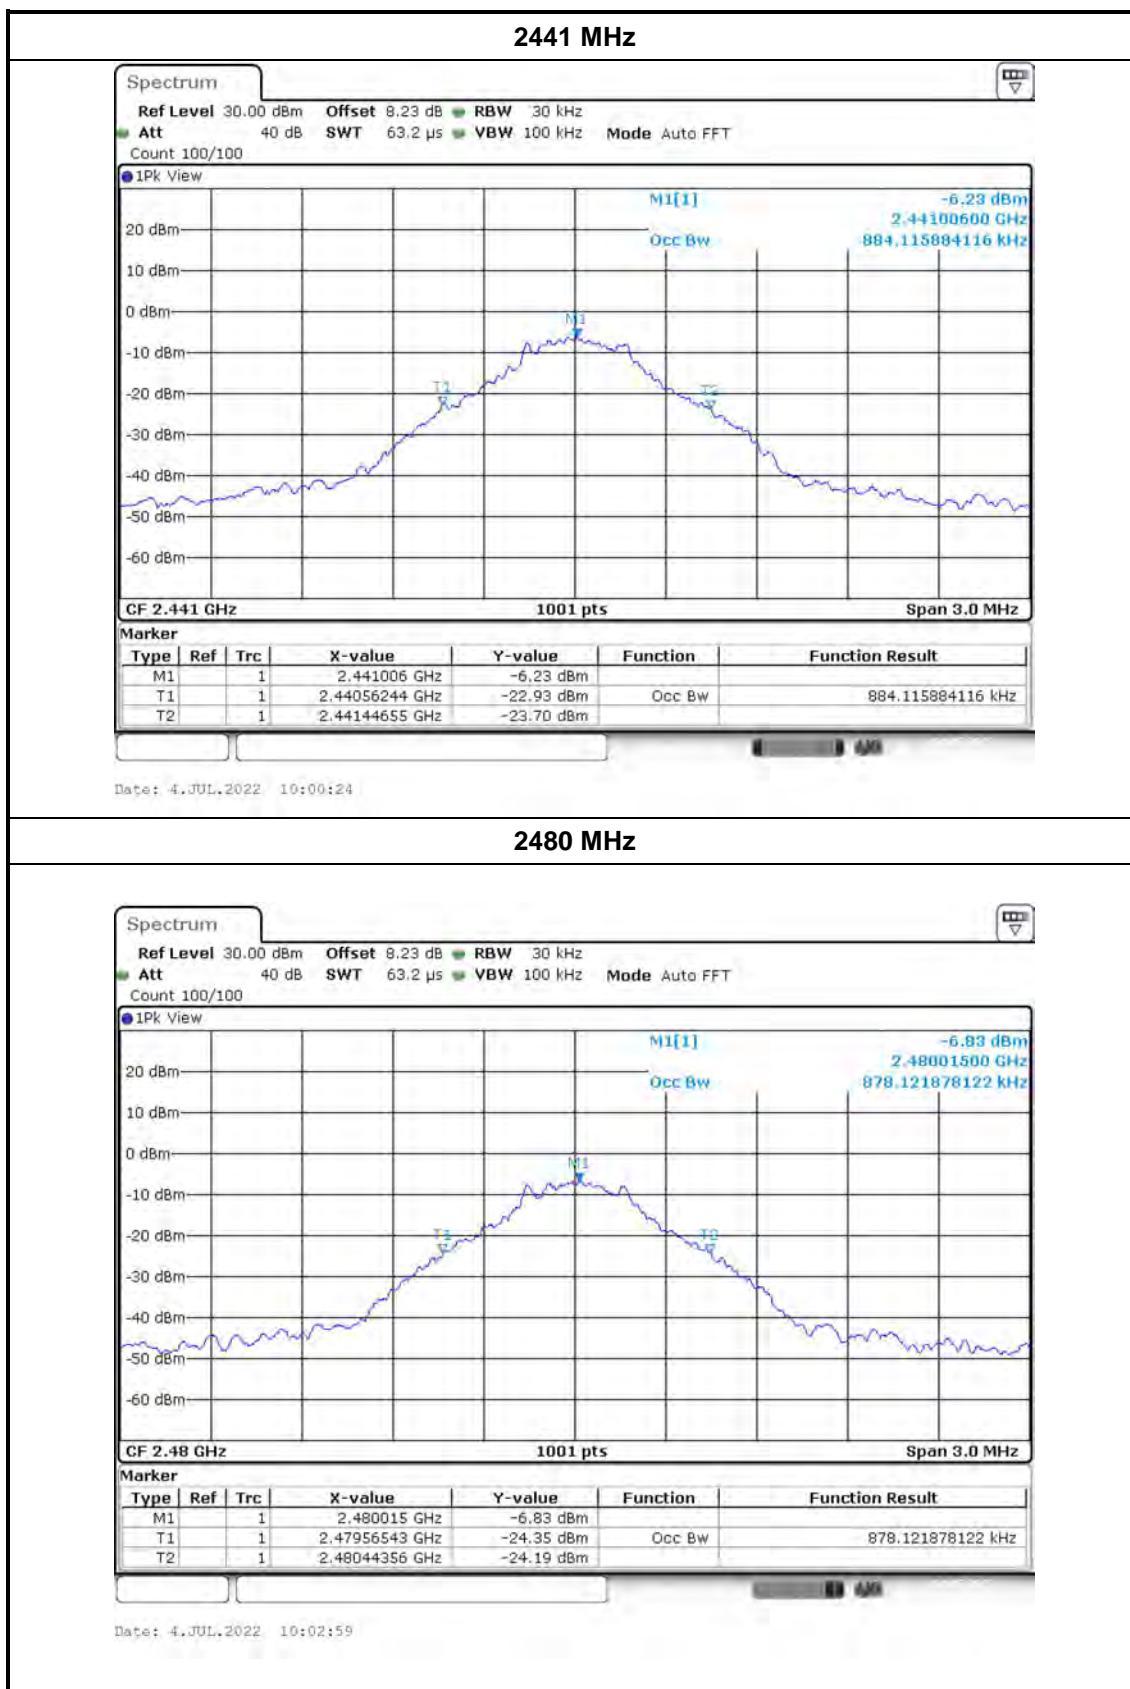

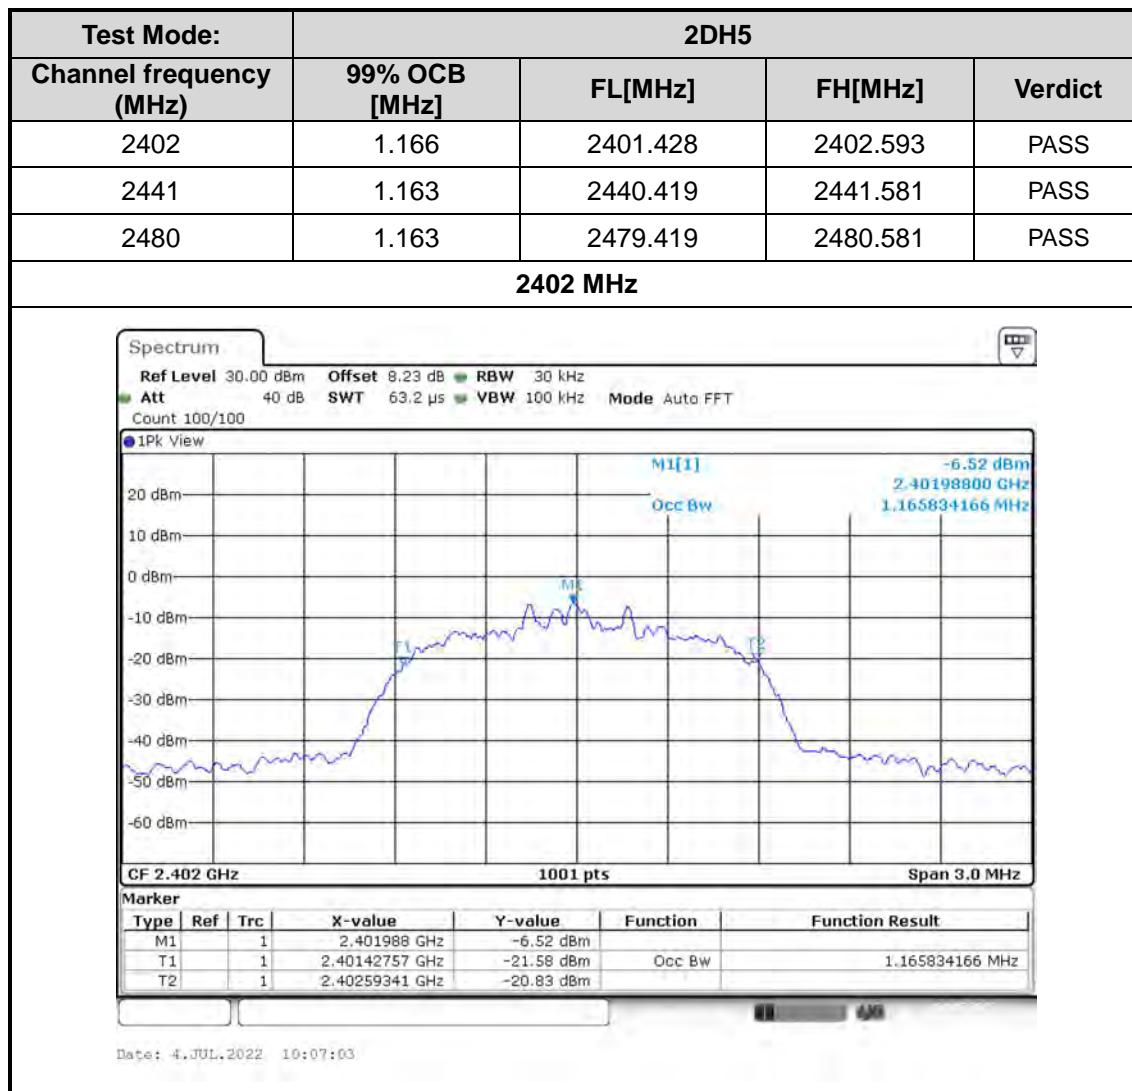

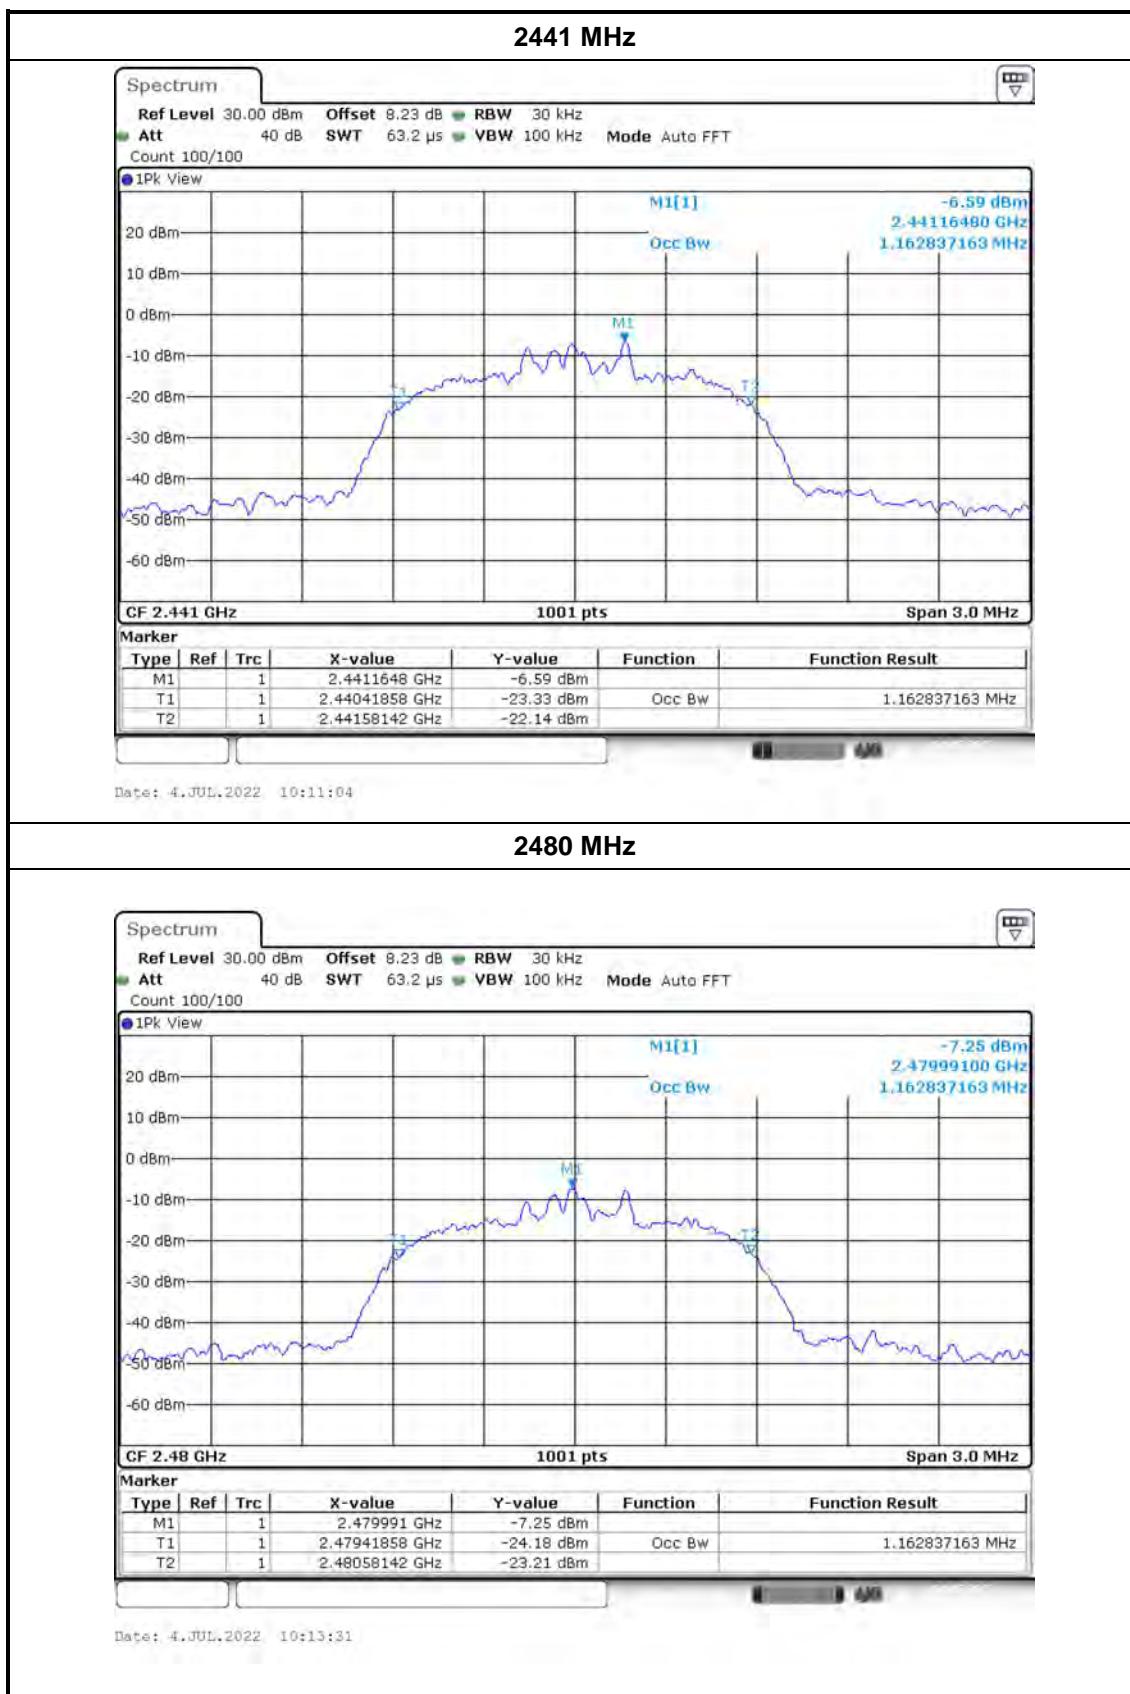

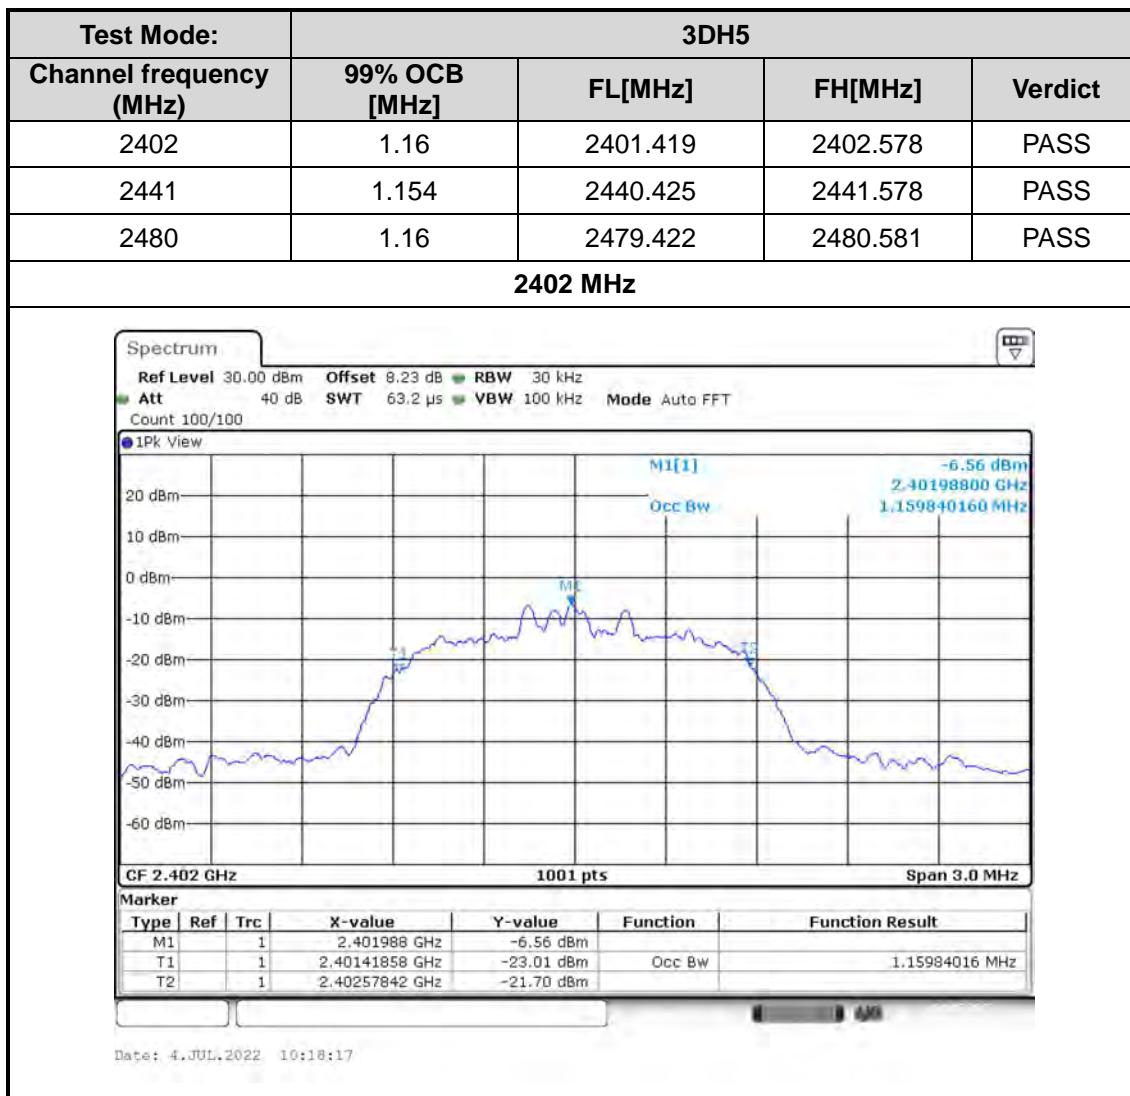

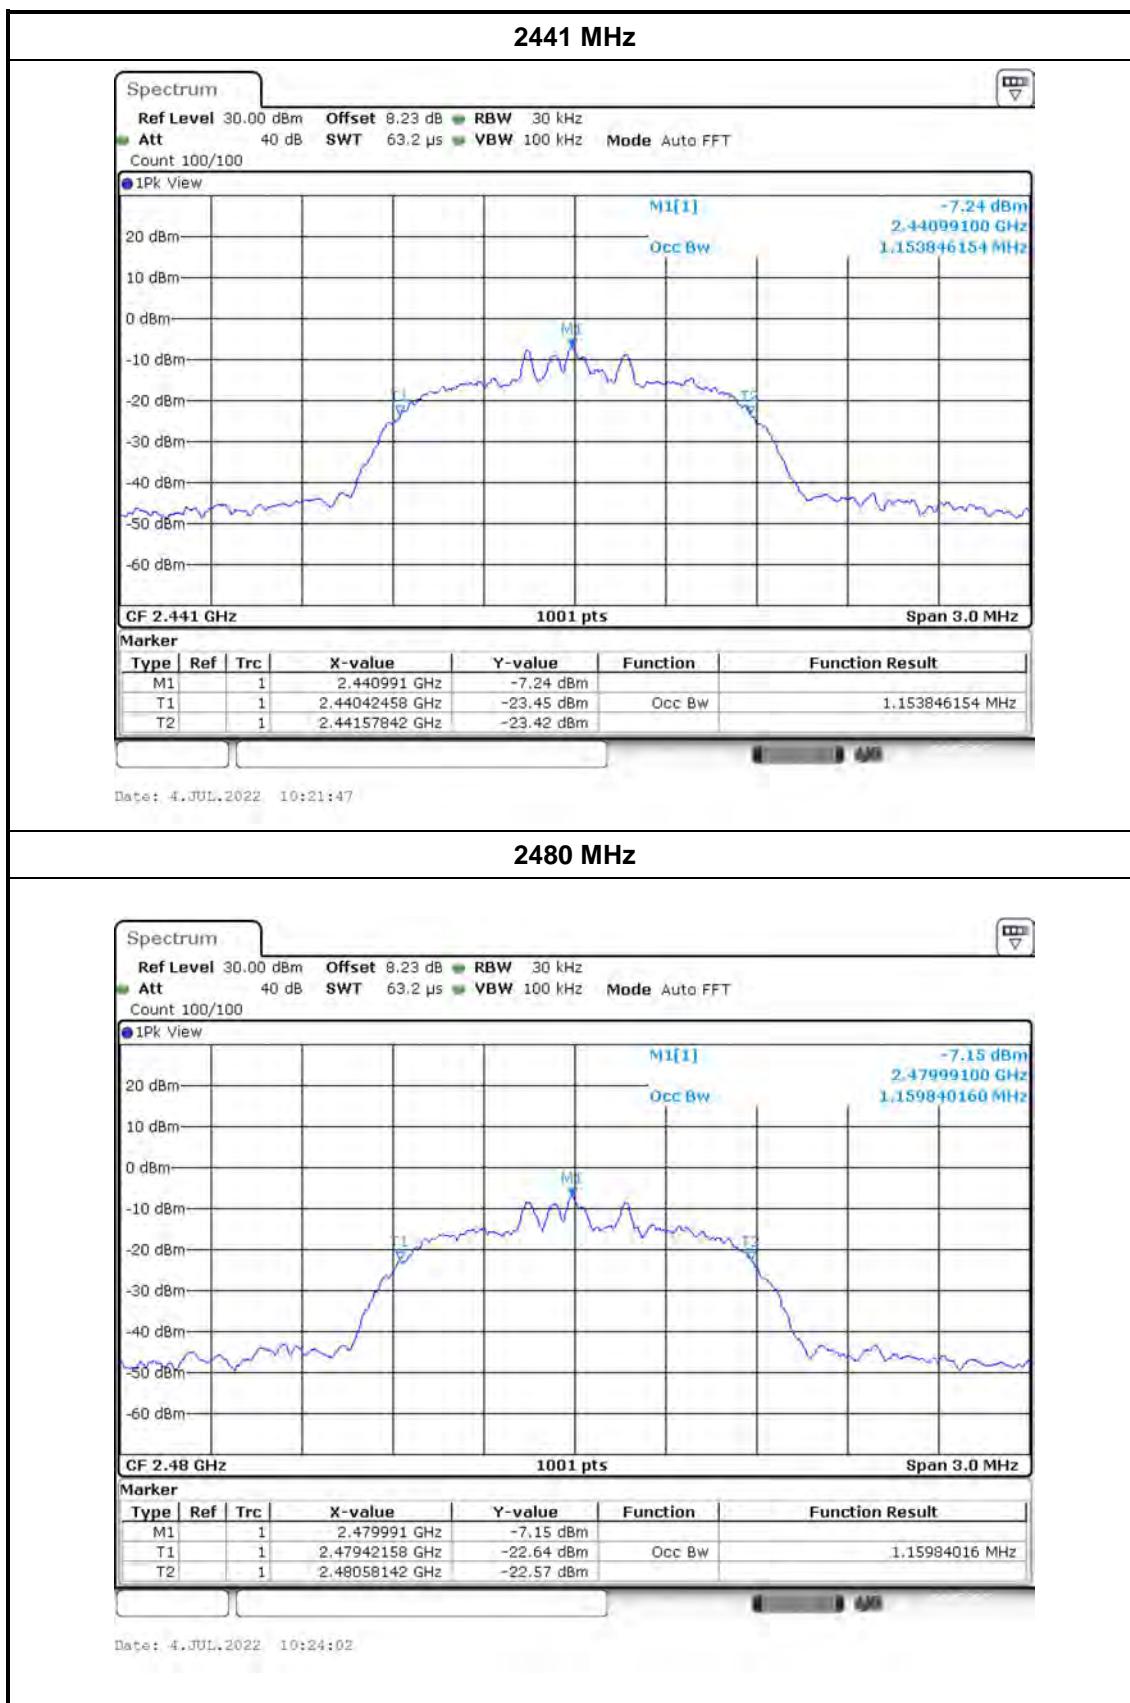

### 3.4. Carrier Frequencies Separation


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the  $2/3 \times 20$  dB bandwidth of the hopping channel, whichever is greater.

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

#### Test Configuration

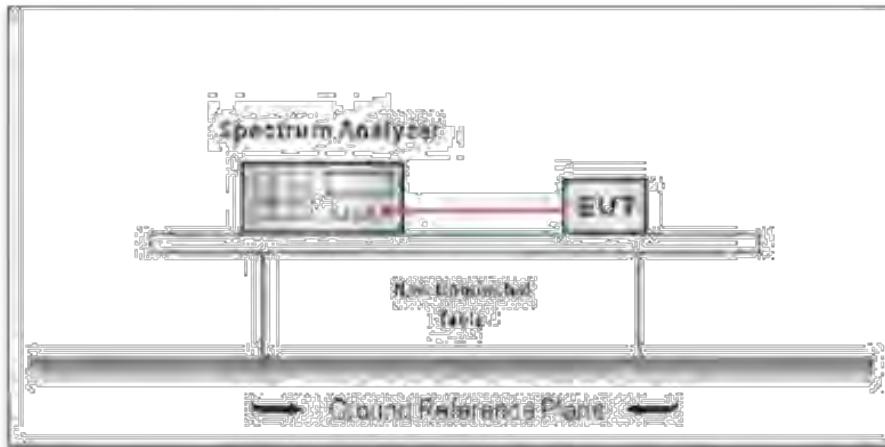

#### Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.

2. Spectrum Setting:

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


#### Test Mode

Please refer to the clause 2.2.

**Test Results**

Test Mode:		DH5 Hopping Mode	
Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	1.017	>0.680	PASS
DH5 Hopping Mode			
			

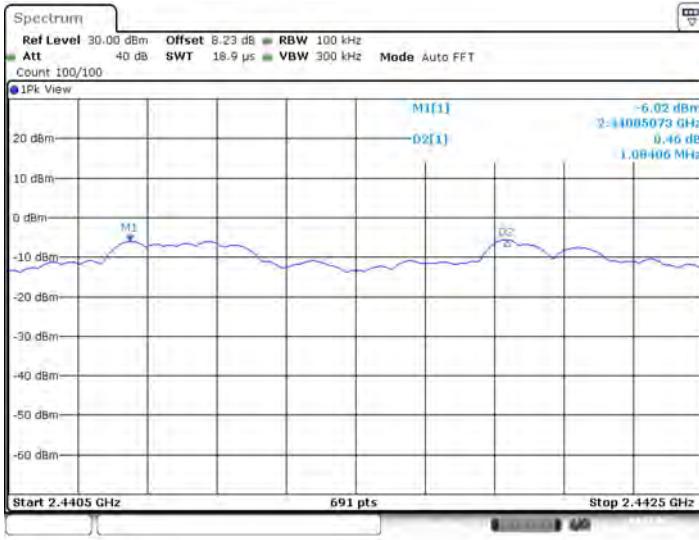Test Mode:	2DH5 Hopping Mode		
Test Mode	Result[MHz]	Limit[MHz]	Verdict
2DH5	1.084	>=0.887	PASS
<b>2DH5 Hopping Mode</b>			
			

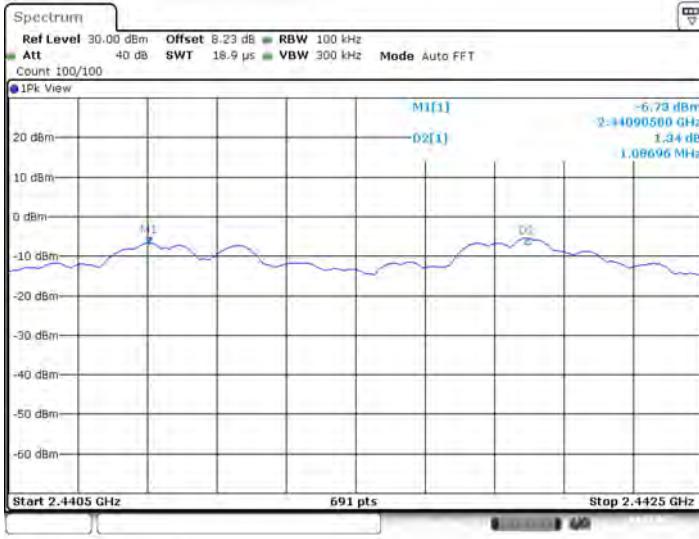
Test Mode:	3DH5 Hopping Mode		
Test Mode	Result[MHz]	Limit[MHz]	Verdict
3DH5	1.087	>=0.880	PASS
<b>3DH5 Hopping Mode</b>			
			

### 3.5. Number of Hopping Channel

#### Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

#### Test Configuration

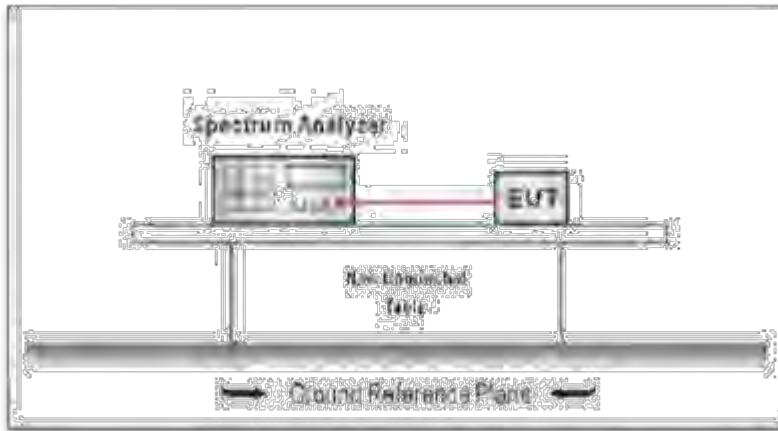

#### Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
  - (1) Peak Detector: RBW=100 kHz, VBW  $\geq$  RBW, Sweep time= Auto.



#### Test Mode

Please refer to the clause 2.2.

**Test Result**

Test Mode:	Hopping Mode	
Frequency Range	Quantity of Hopping Channel	Limit
2402MHz~2480MHz	79	>15

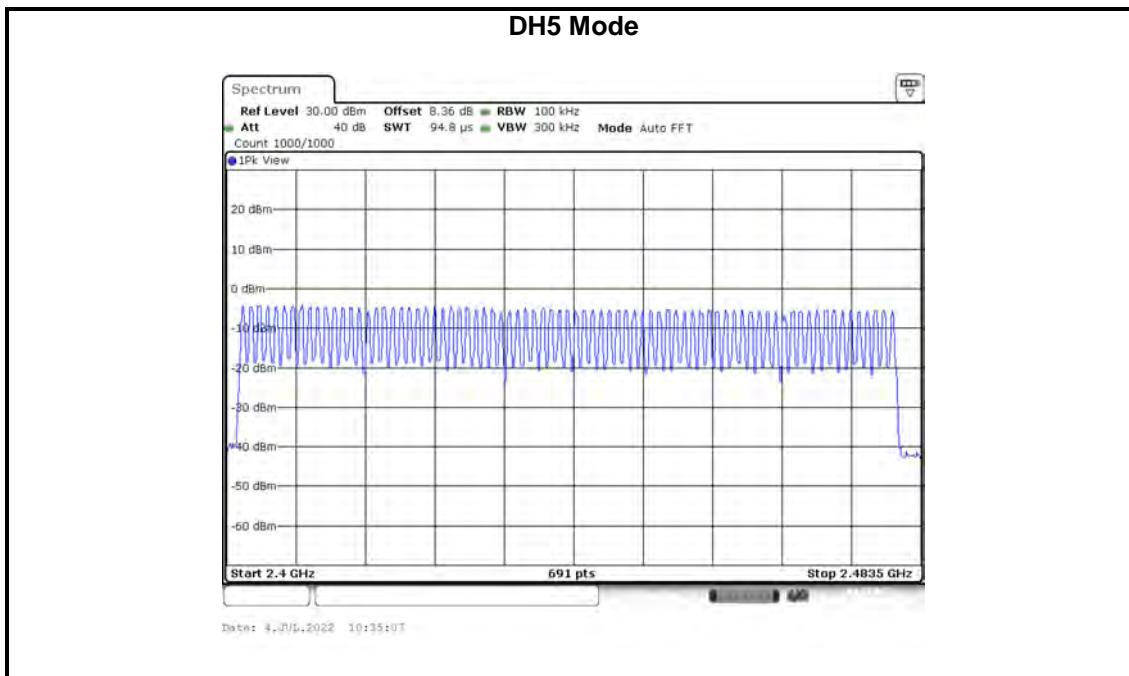

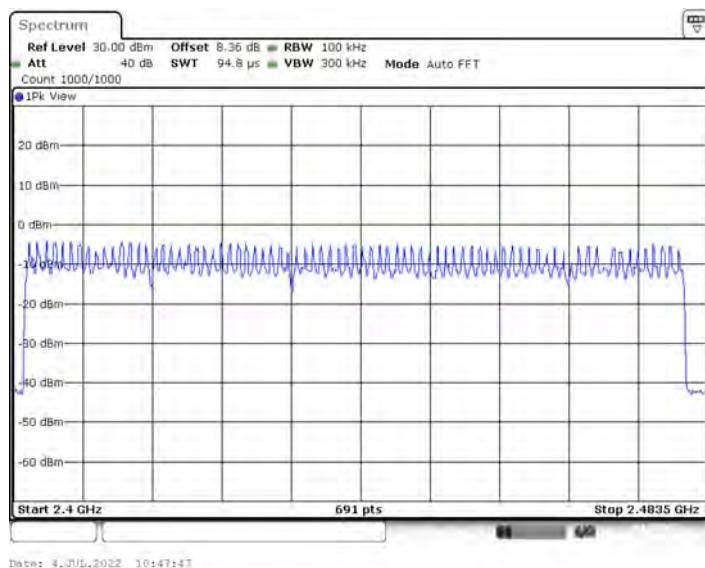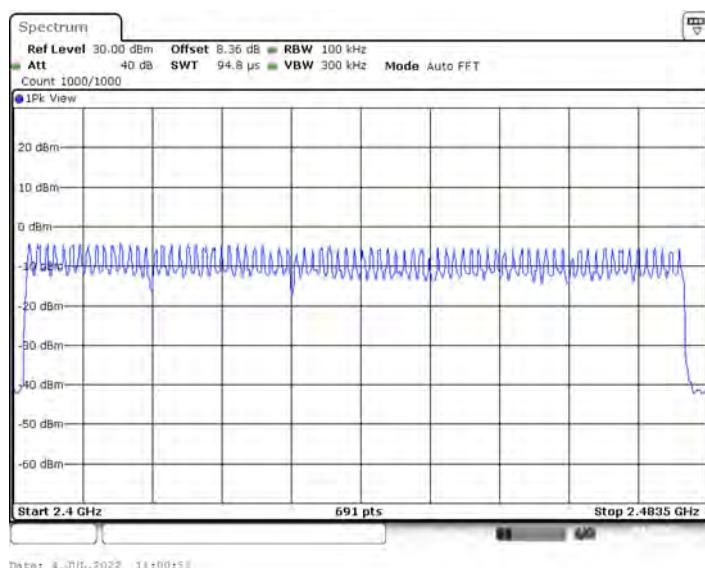**2DH5 Mode****3DH5 Mode**


Note: The DH5,2DH5,3DH5 modulation is the worst case and recorded in the report.

### 3.6. Dwell Time

#### Limit

Section	Test Item	Limit
15.247(a)(1)	Average Time of Occupancy	0.4 sec

#### Test Configuration

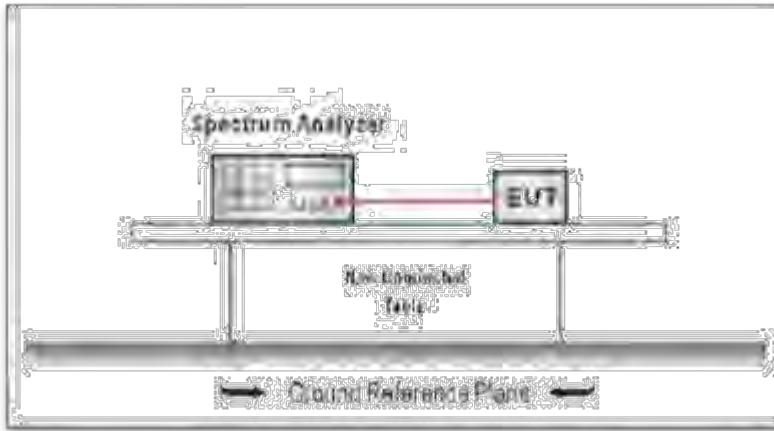

#### Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
  - (1) Spectrum Setting: RBW=1MHz, VBW  $\geq$  RBW.
  - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
  - (3) Sweep Time is more than once pulse time.
  - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
  - (5) Measure the maximum time duration of one single pulse.
  - (6) Set the EUT for packet transmitting.

#### Test Mode

Please refer to the clause 2.2


## Test Result

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit(s)	Conclusion
GFSK	DH5	2441	-1.14	306.13	<0.4	Pass
$\pi/4$ DQPSK	2DH5	2441	-1.14	306.13	<0.4	Pass
8DPSK	3DH5	2441	2.60	306.13	<0.4	Pass

Note:

1. A period time = 0.4 (s) \* 79 = 31.6(s)
2. DH1 time slot = Pulse Duration \* (1600/(2\*79)) \* A period time  
DH3 time slot = Pulse Duration \* (1600/(4\*79)) \* A period time  
DH5 time slot = Pulse Duration \* (1600/(6\*79)) \* A period time
3. For GFSK,  $\pi/4$ -DQPSK and 8DPSK: The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s



## Test plots

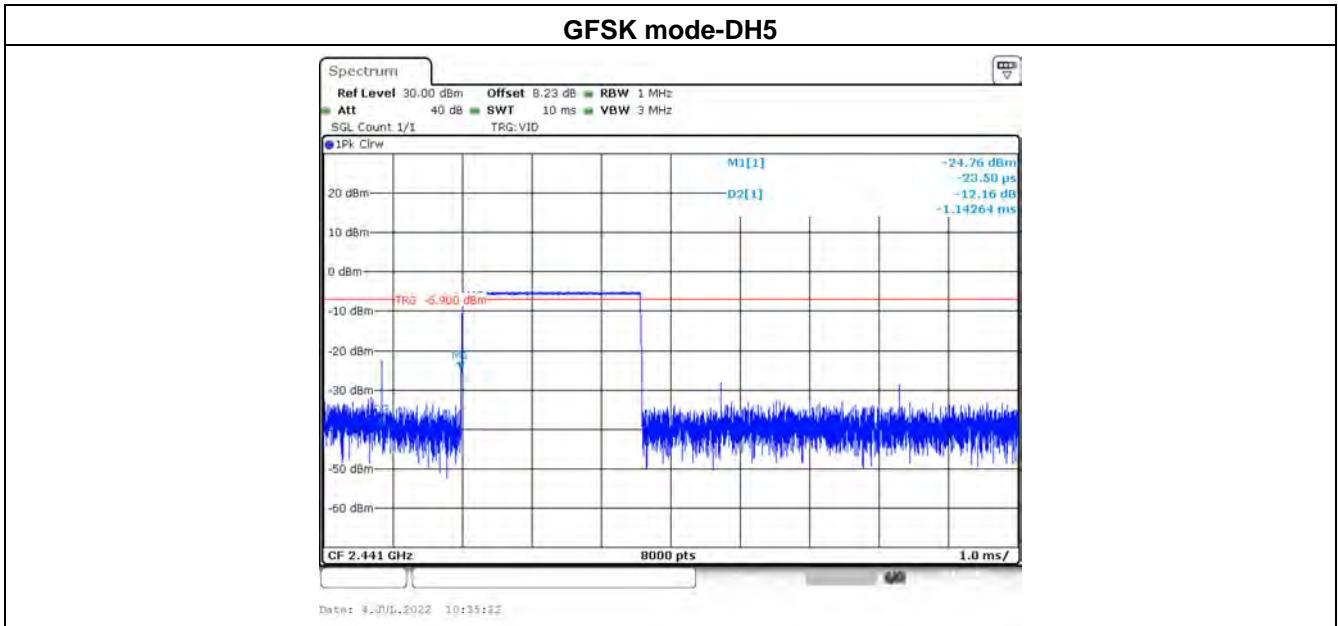

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

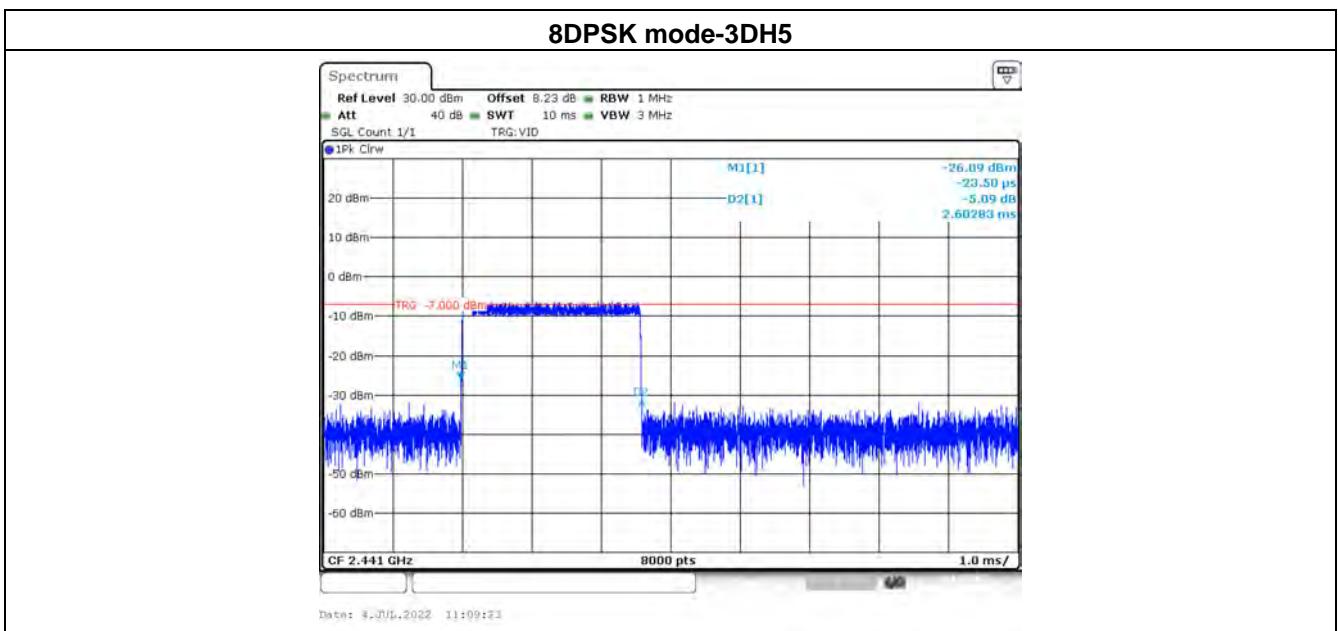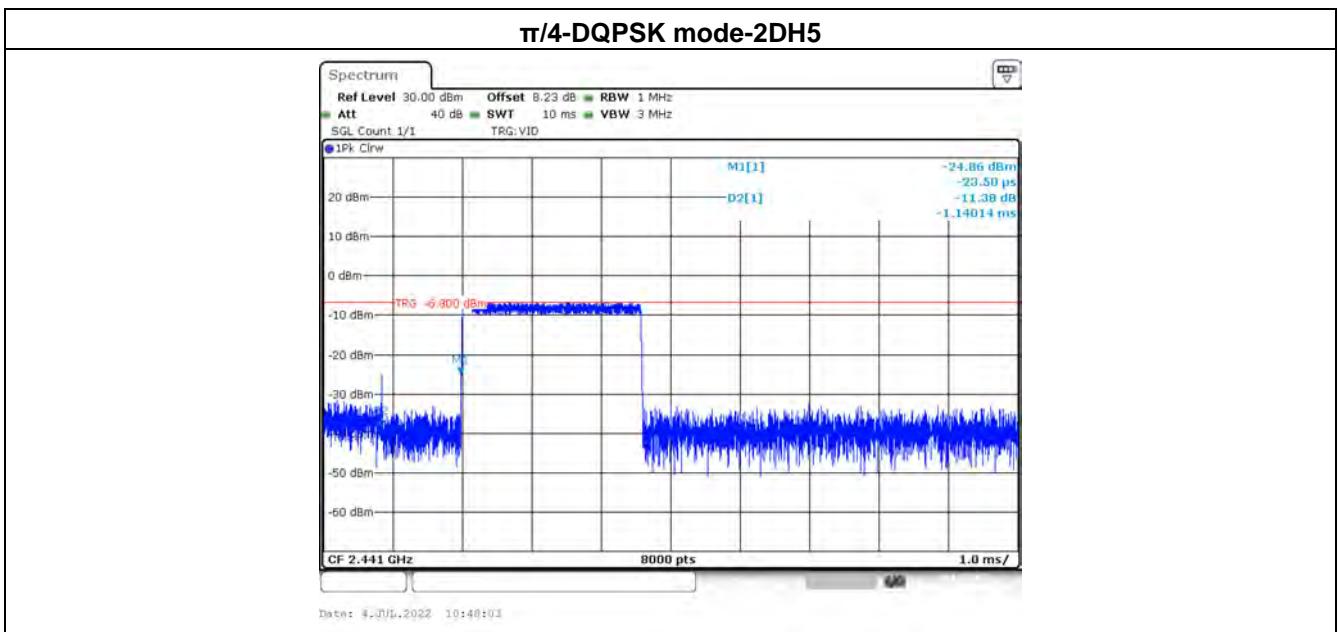

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com


### 3.7. Band Edge and Spurious Emission (conducted)

#### LIMIT

##### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### TEST CONFIGURATION

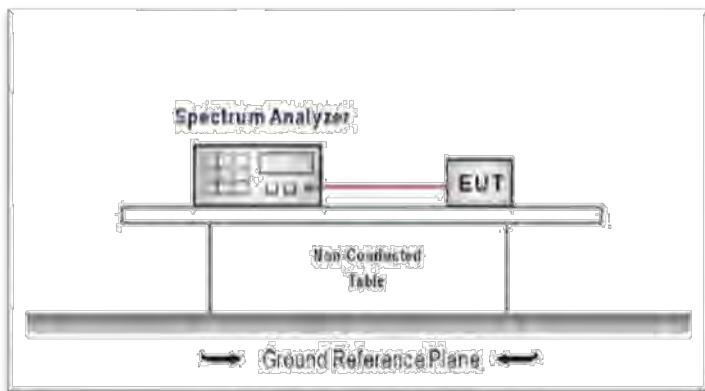

#### TEST PROCEDURE

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.

2. Spectrum Setting:

RBW=100KHz

VBW=3\*RBW.

Detector function: Peak.

Trace: Max hold.

Sweep = Auto couple.

Allow the trace to stabilize.

#### TEST MODE:



Please refer to the clause 2.2.

#### TEST RESULTS

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

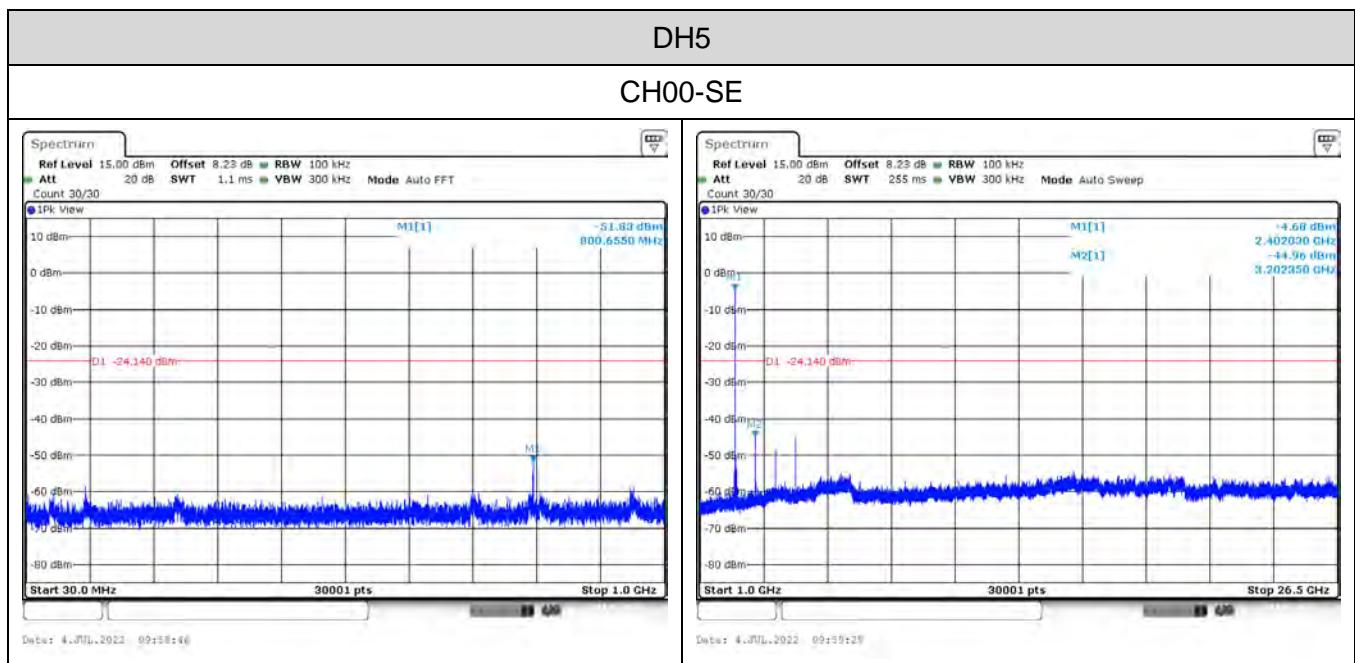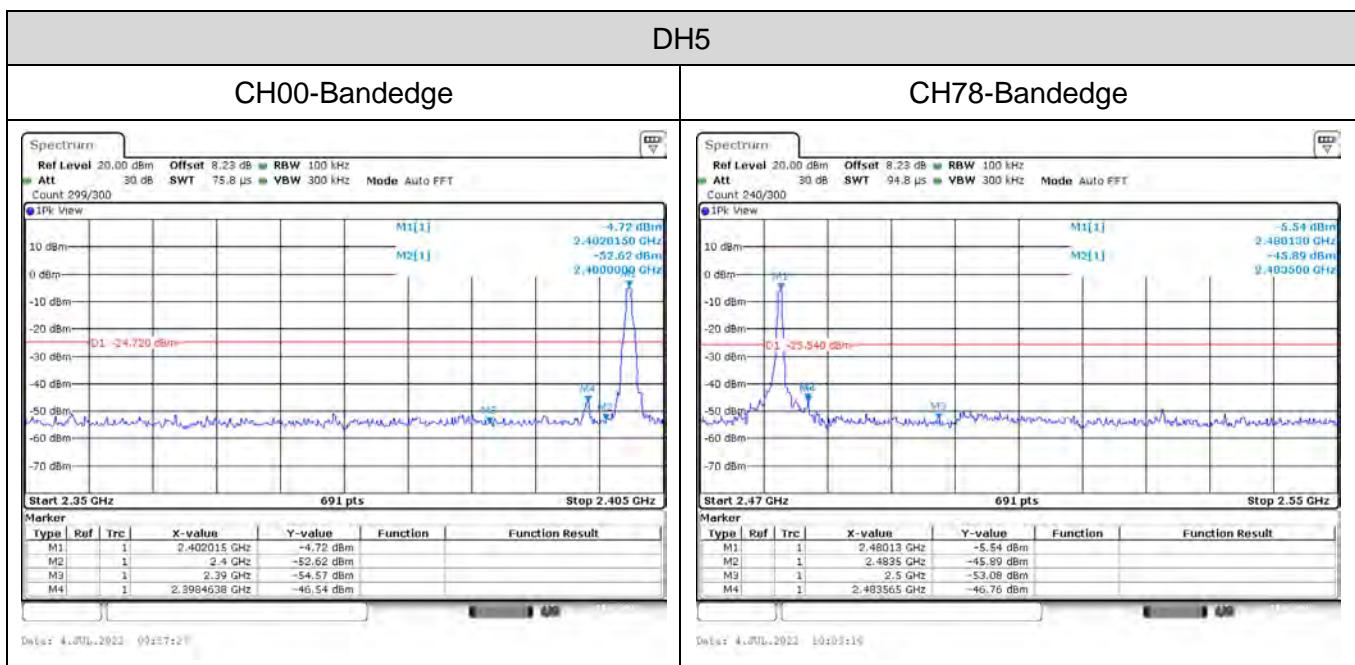


TRF No. FCC Part 15.247\_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

## CH39-SE

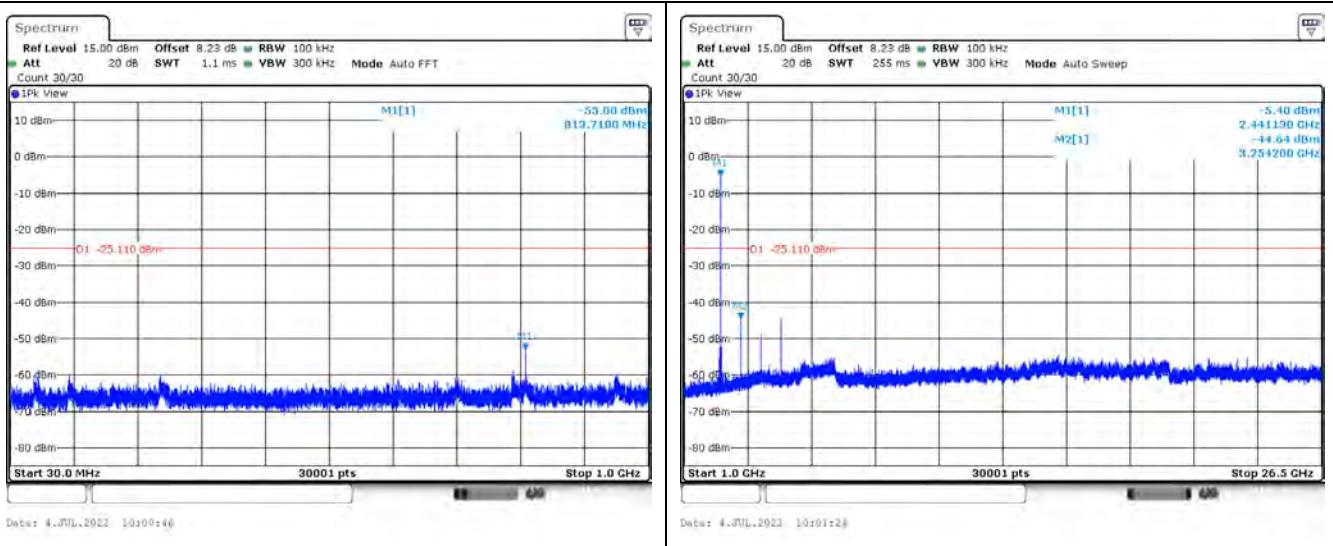


## CH78-SE

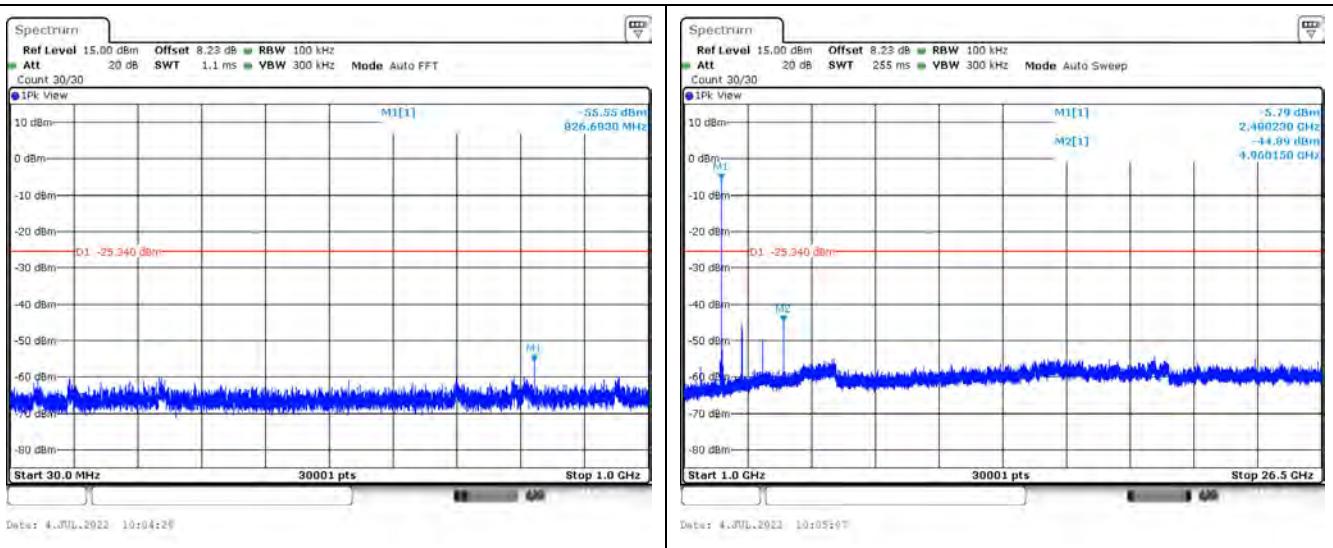

## 2DH5

## CH00-Bandedge


## CH78-Bandedge

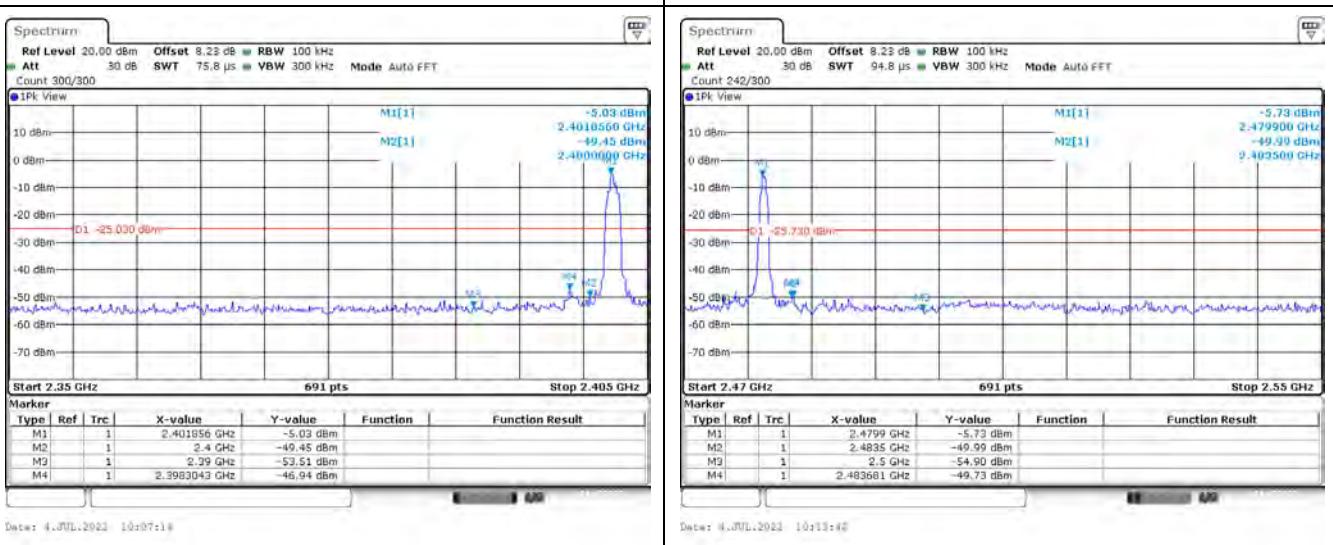

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

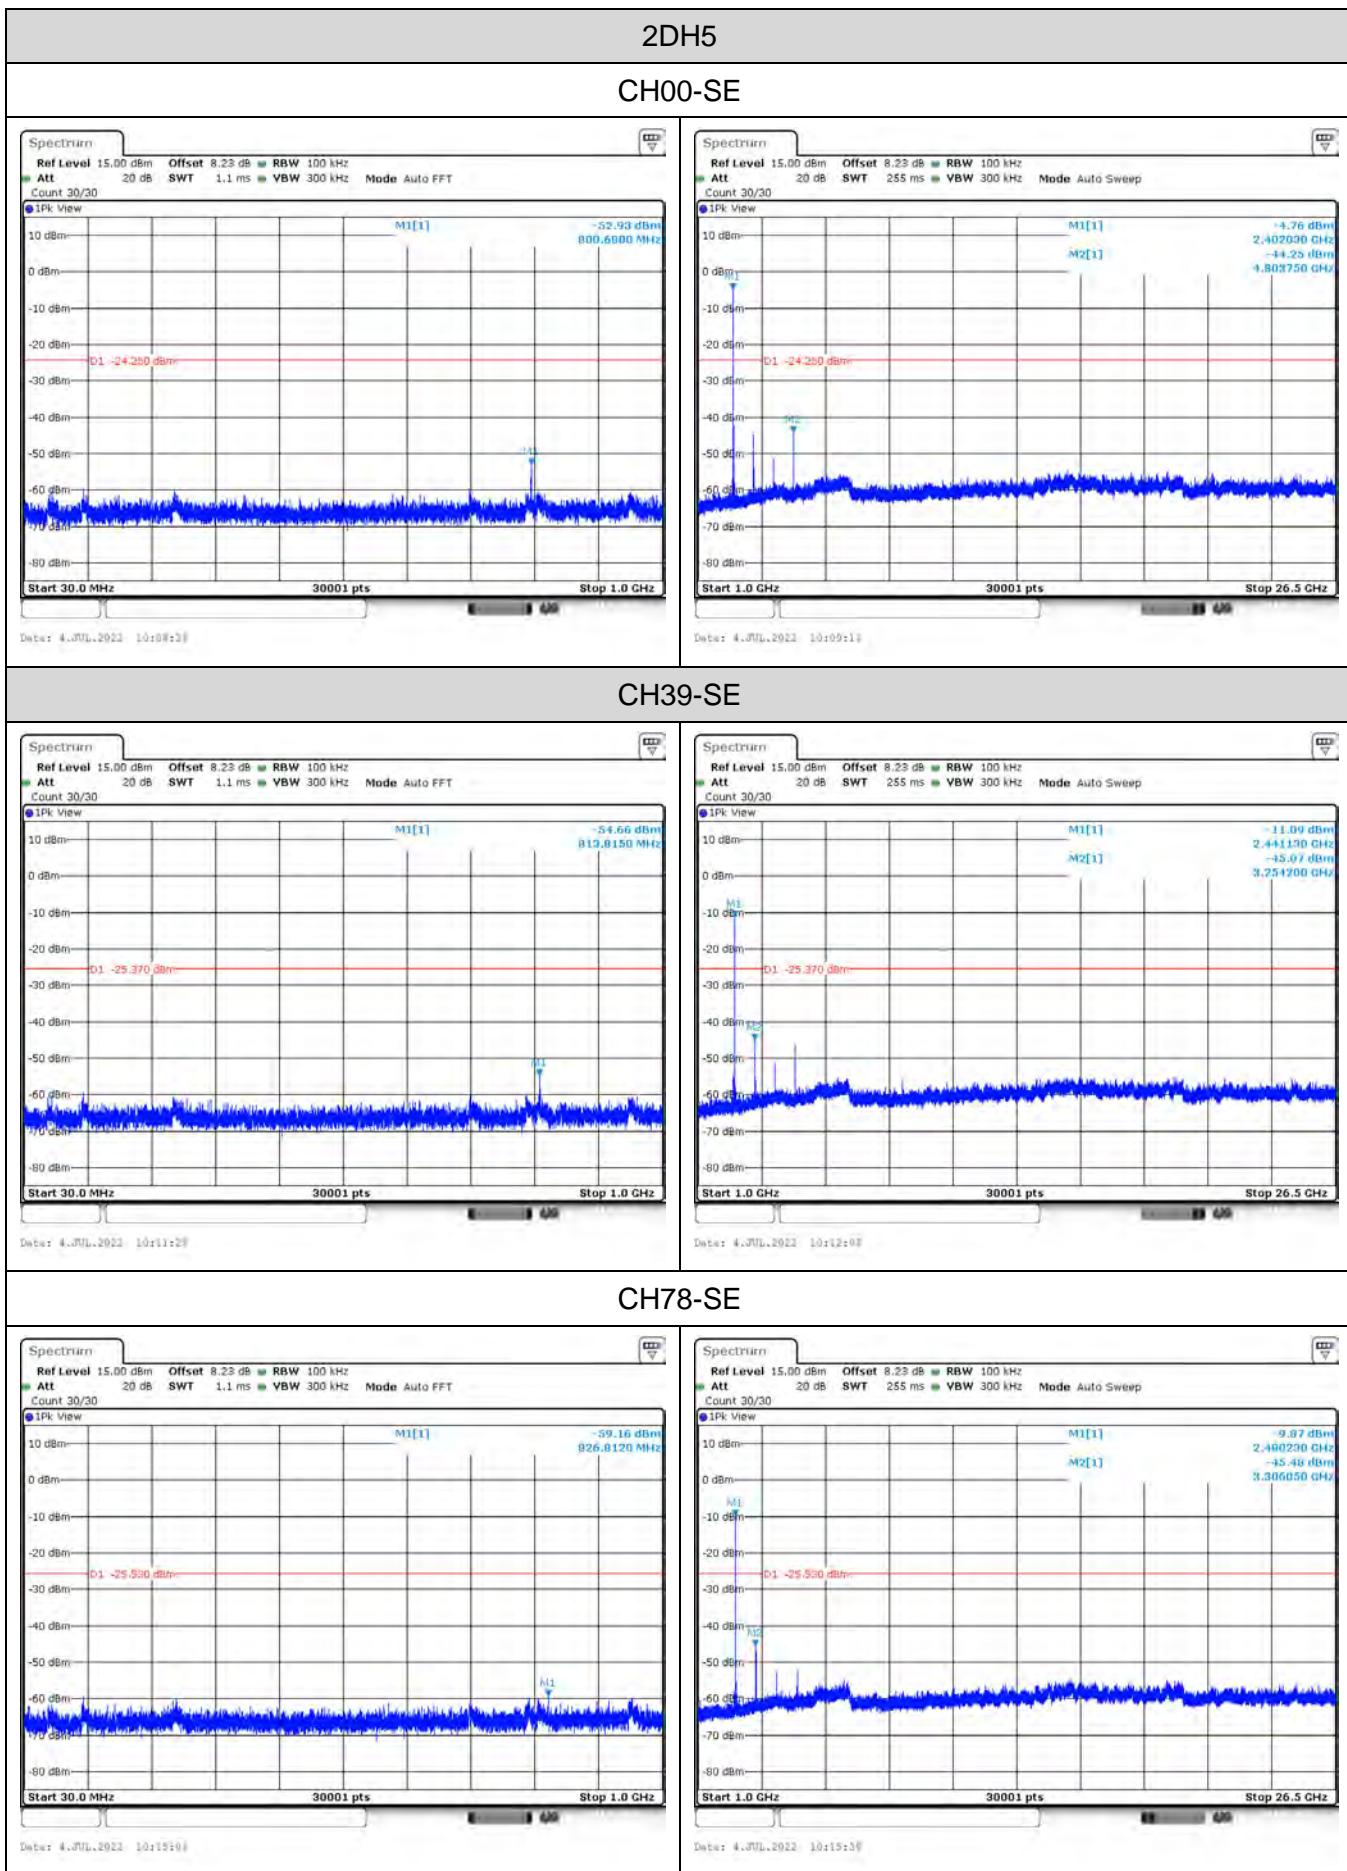


TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

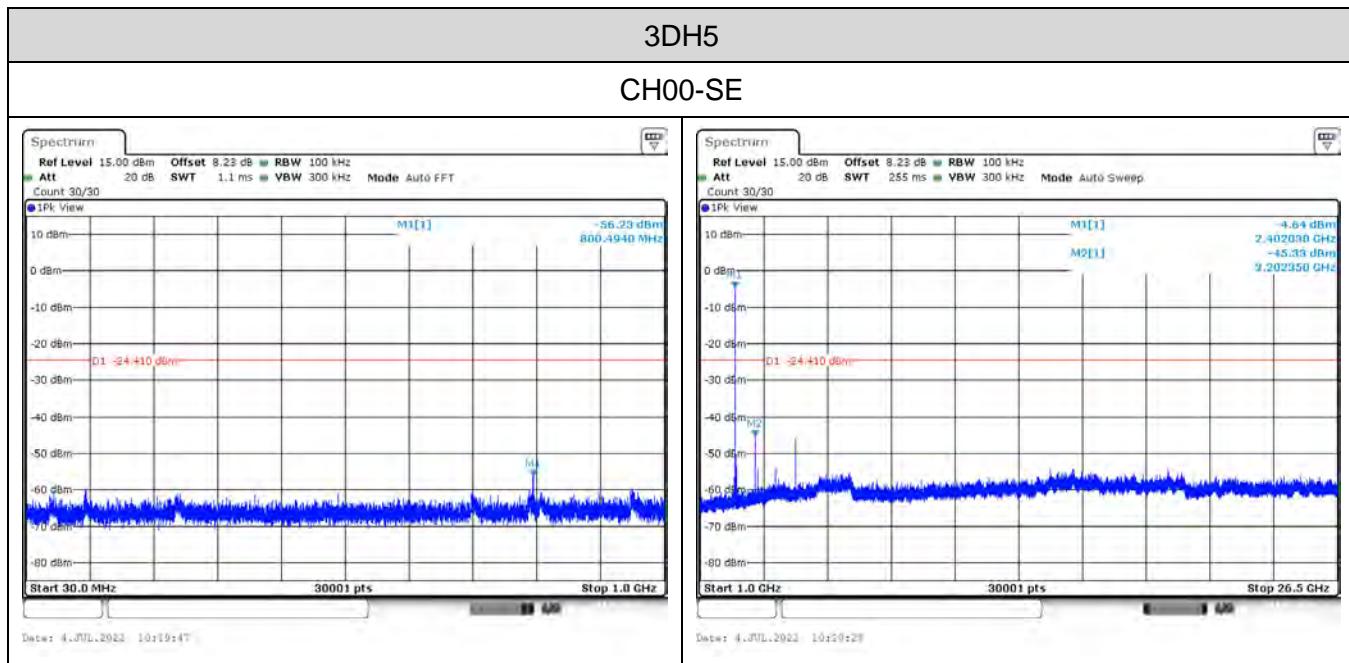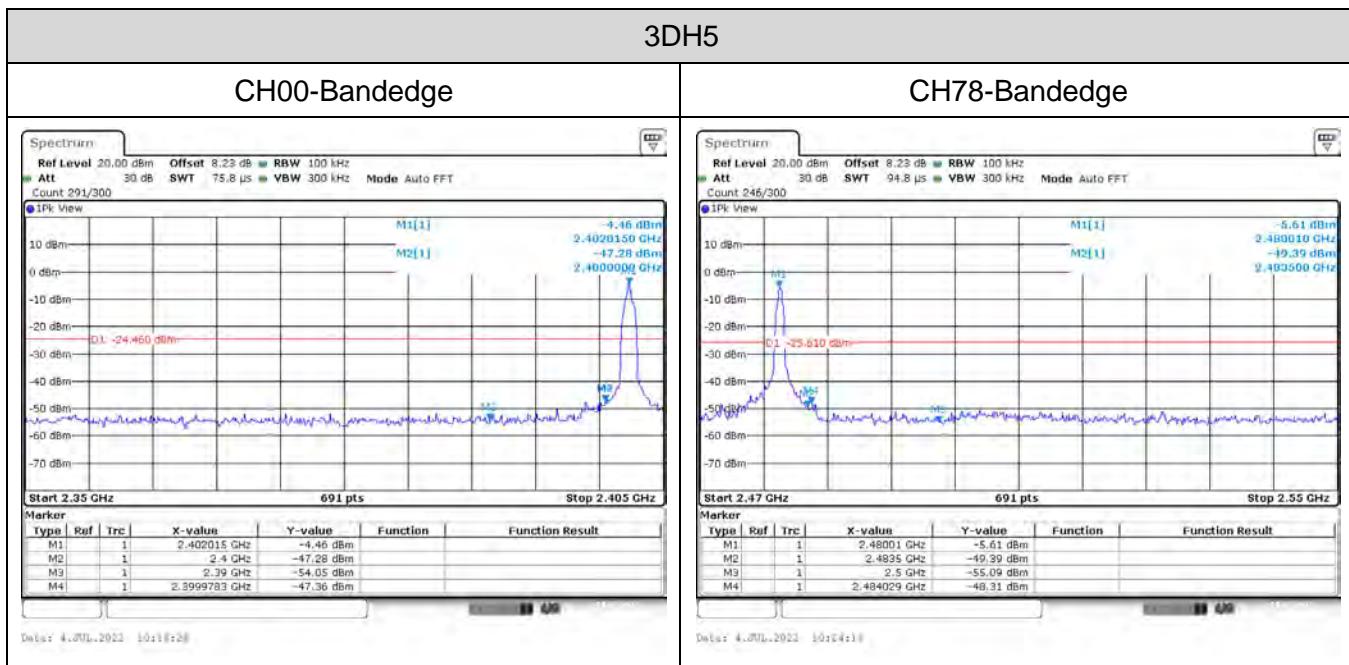


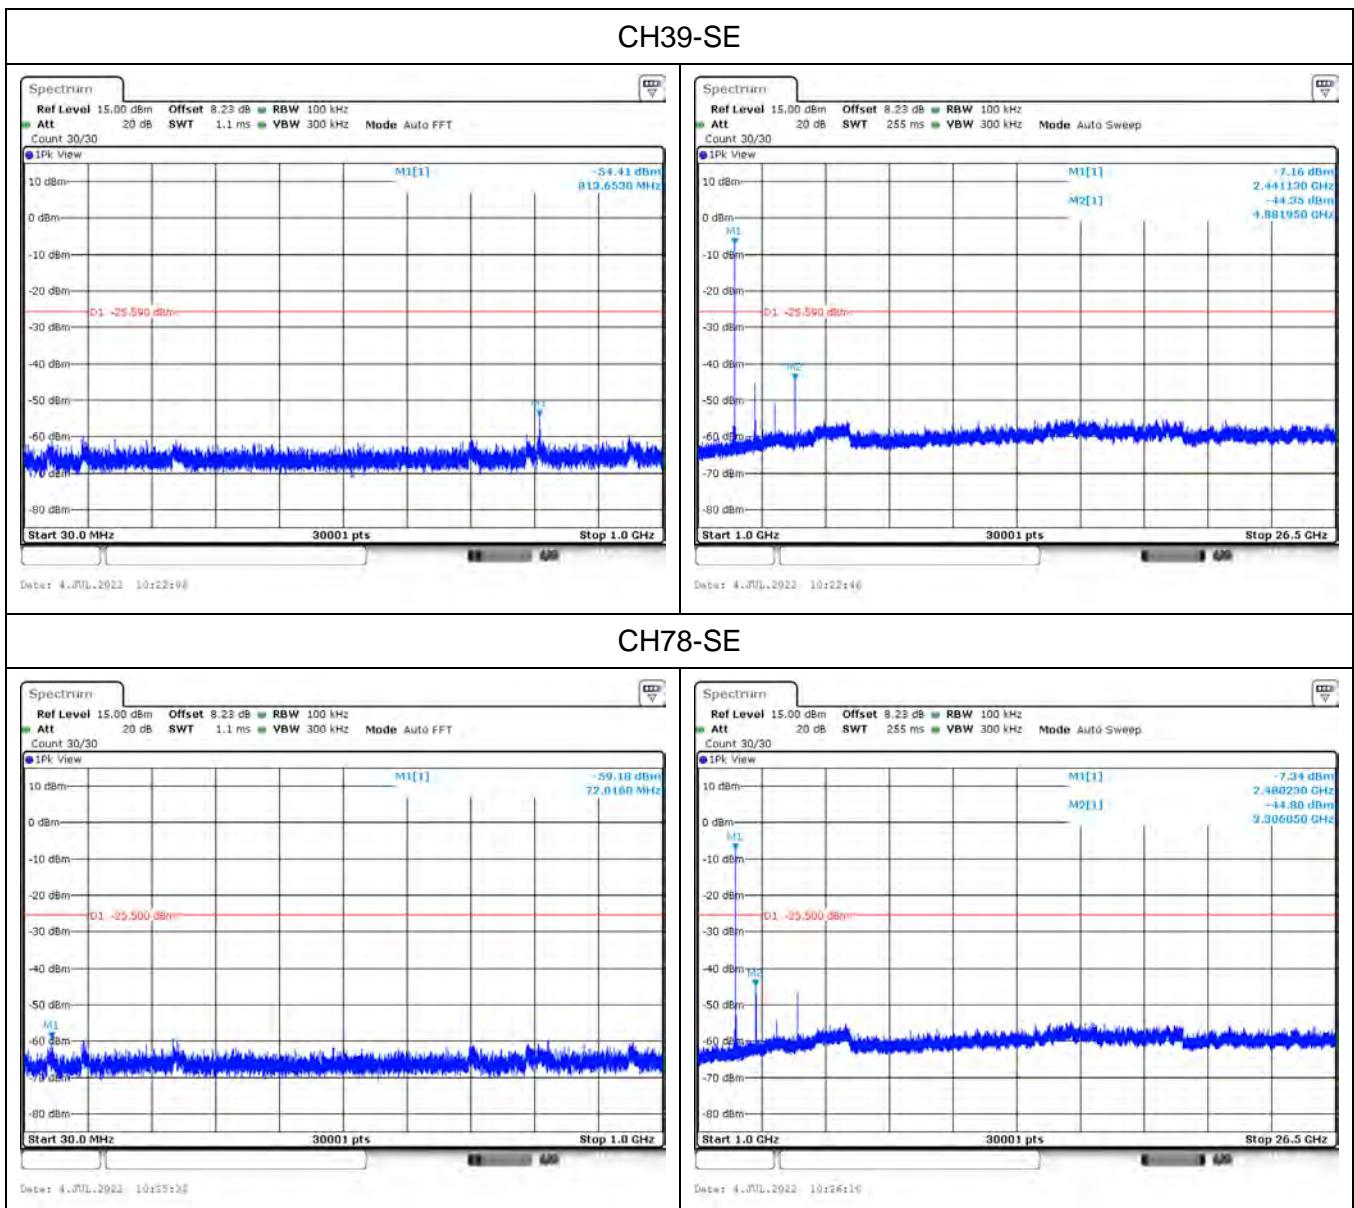

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

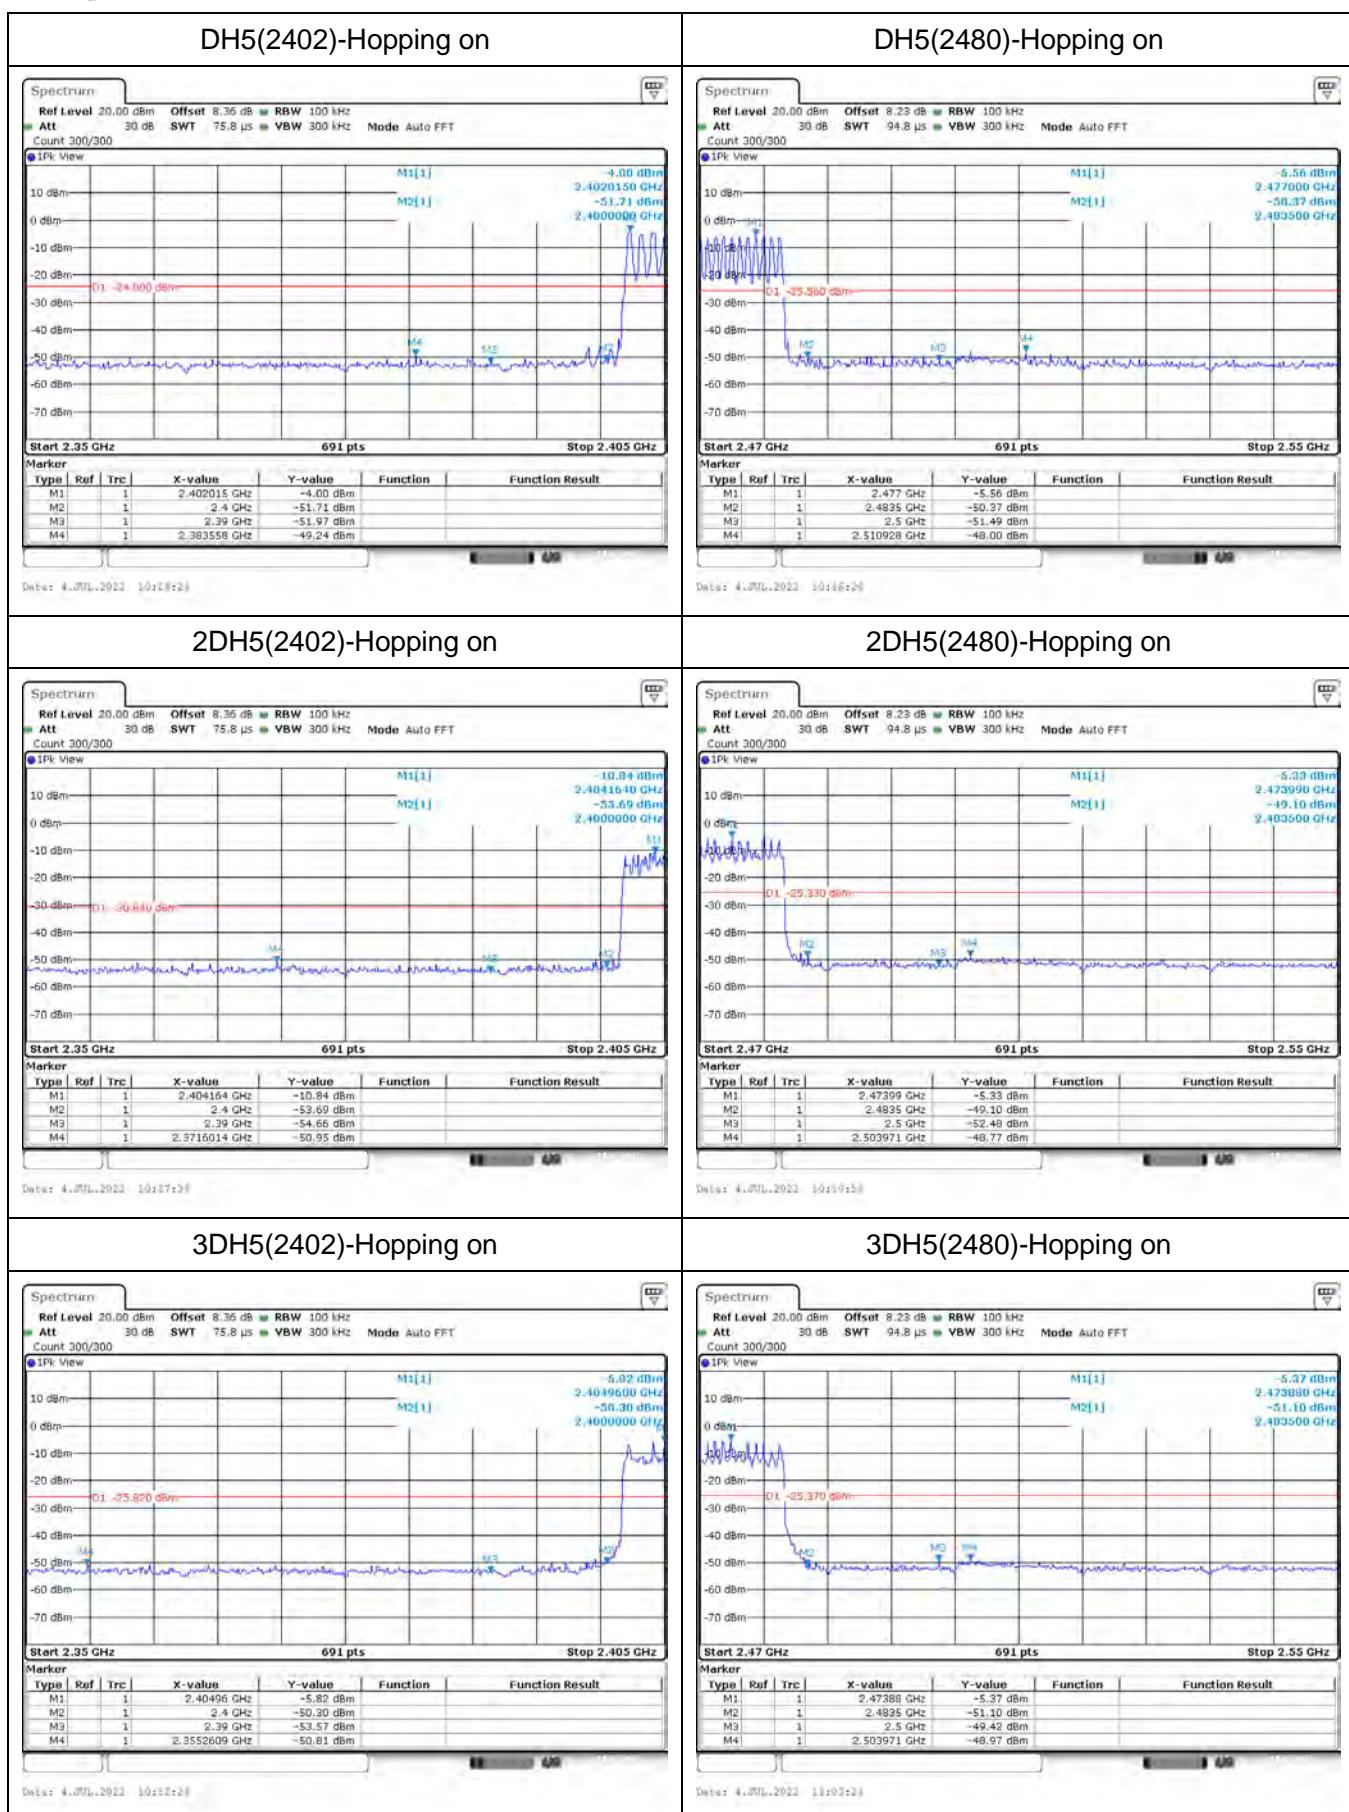


### 3.8. Band Edge Emissions(Radiated)

#### Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

**Note: All restriction bands have been tested, only the worst case is reported.**

#### Test Configuration

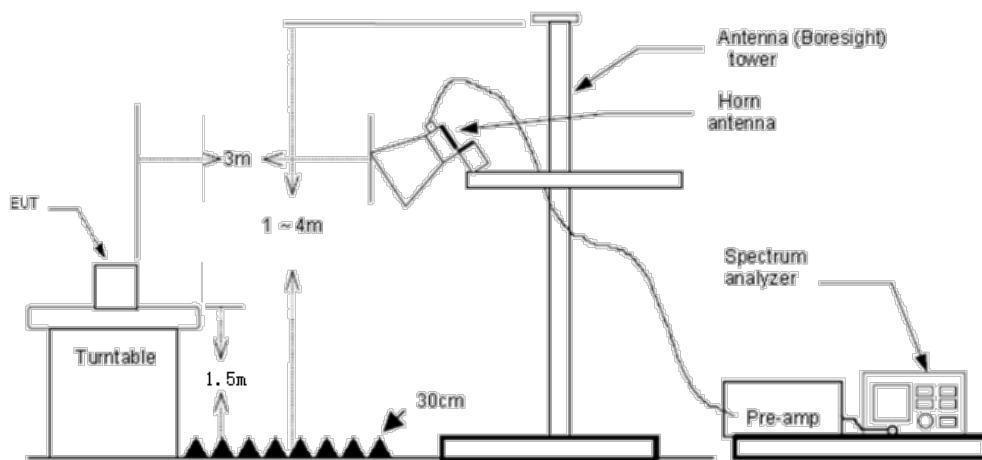

#### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2020 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.  
RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.


#### Test Mode

Please refer to the clause 2.2.

### Test Results

Note:


1. Measurement = Reading level + Correct Factor
2. Correct Factor = Antenna Factor + Cable Loss - Preamplifier Factor
3. Pre-scan DH5, 2DH5 and 3DH5 modulation, and found the DH5 modulation which is worse case, so only show the test data for worse case.

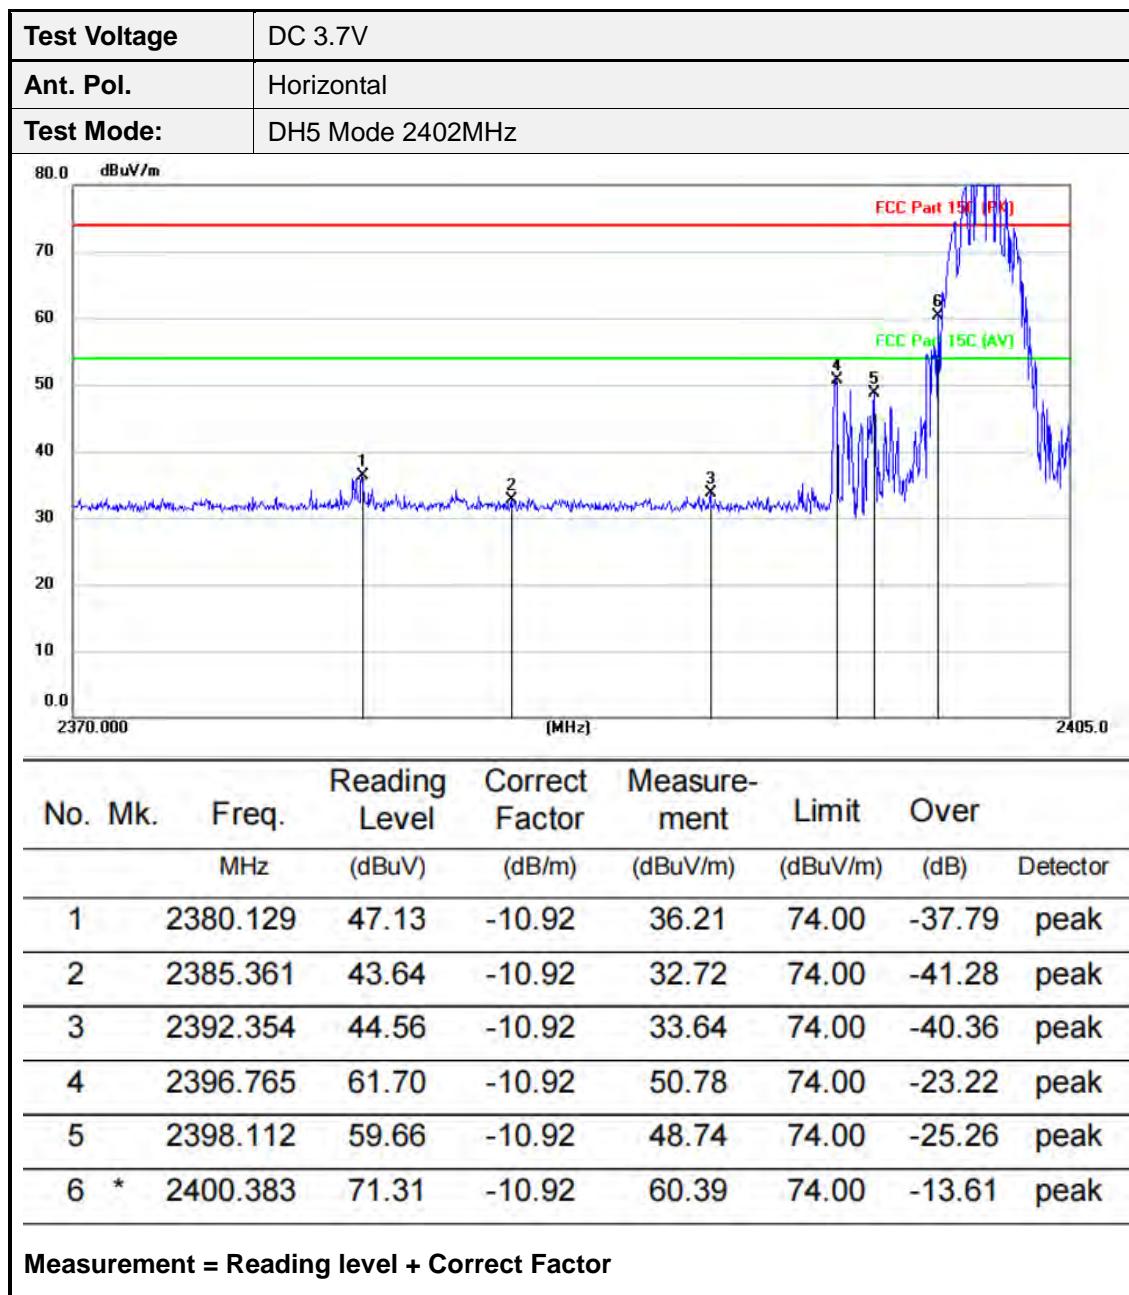

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

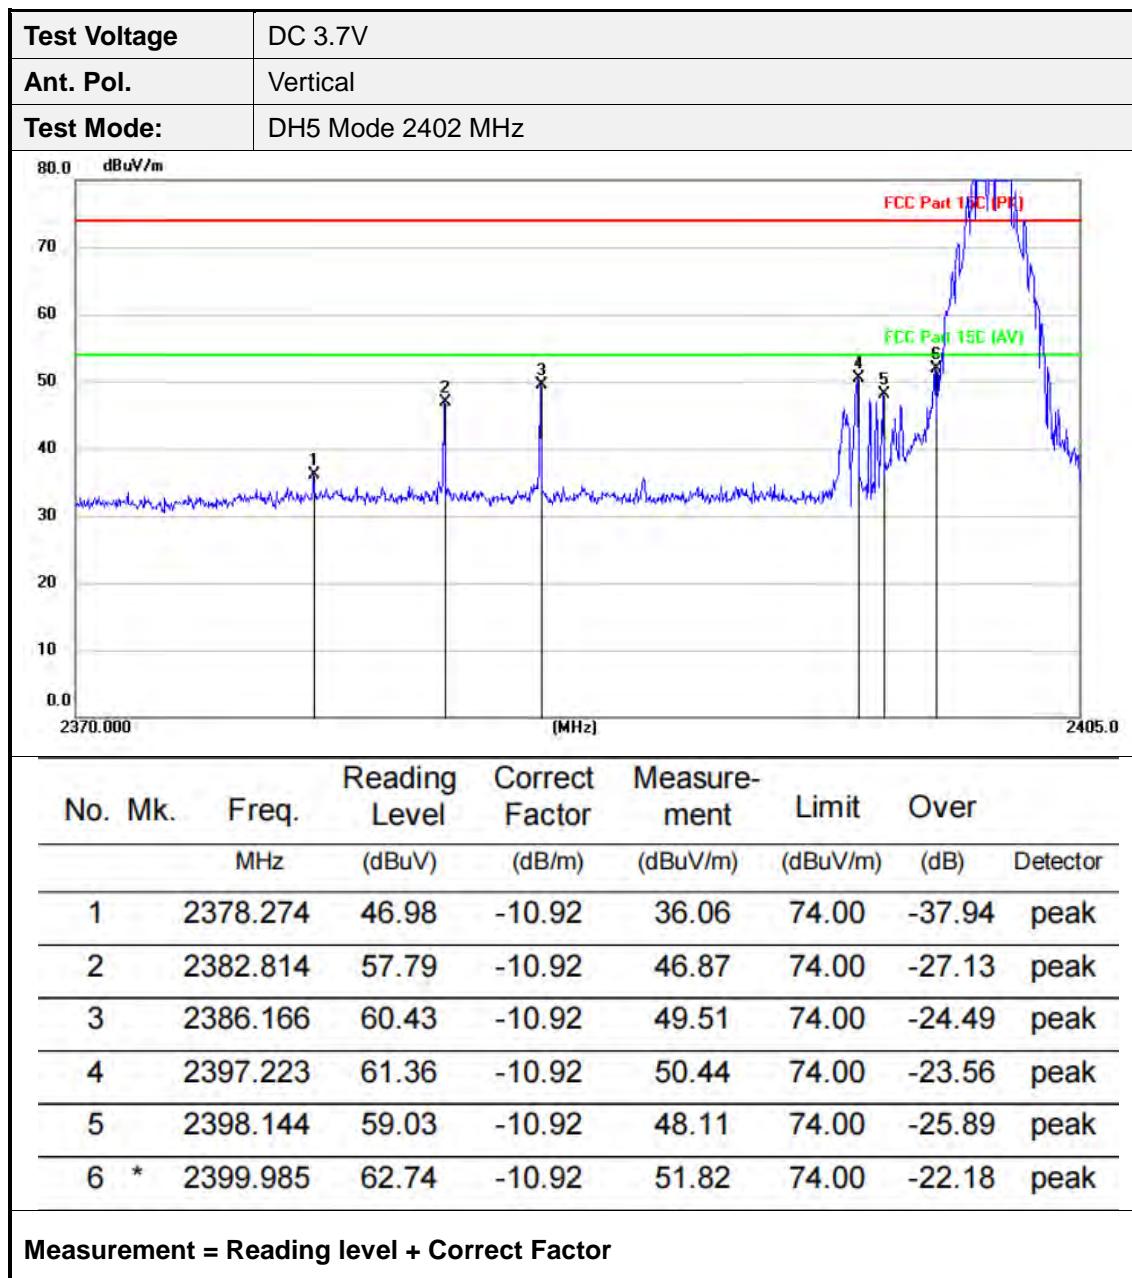



TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

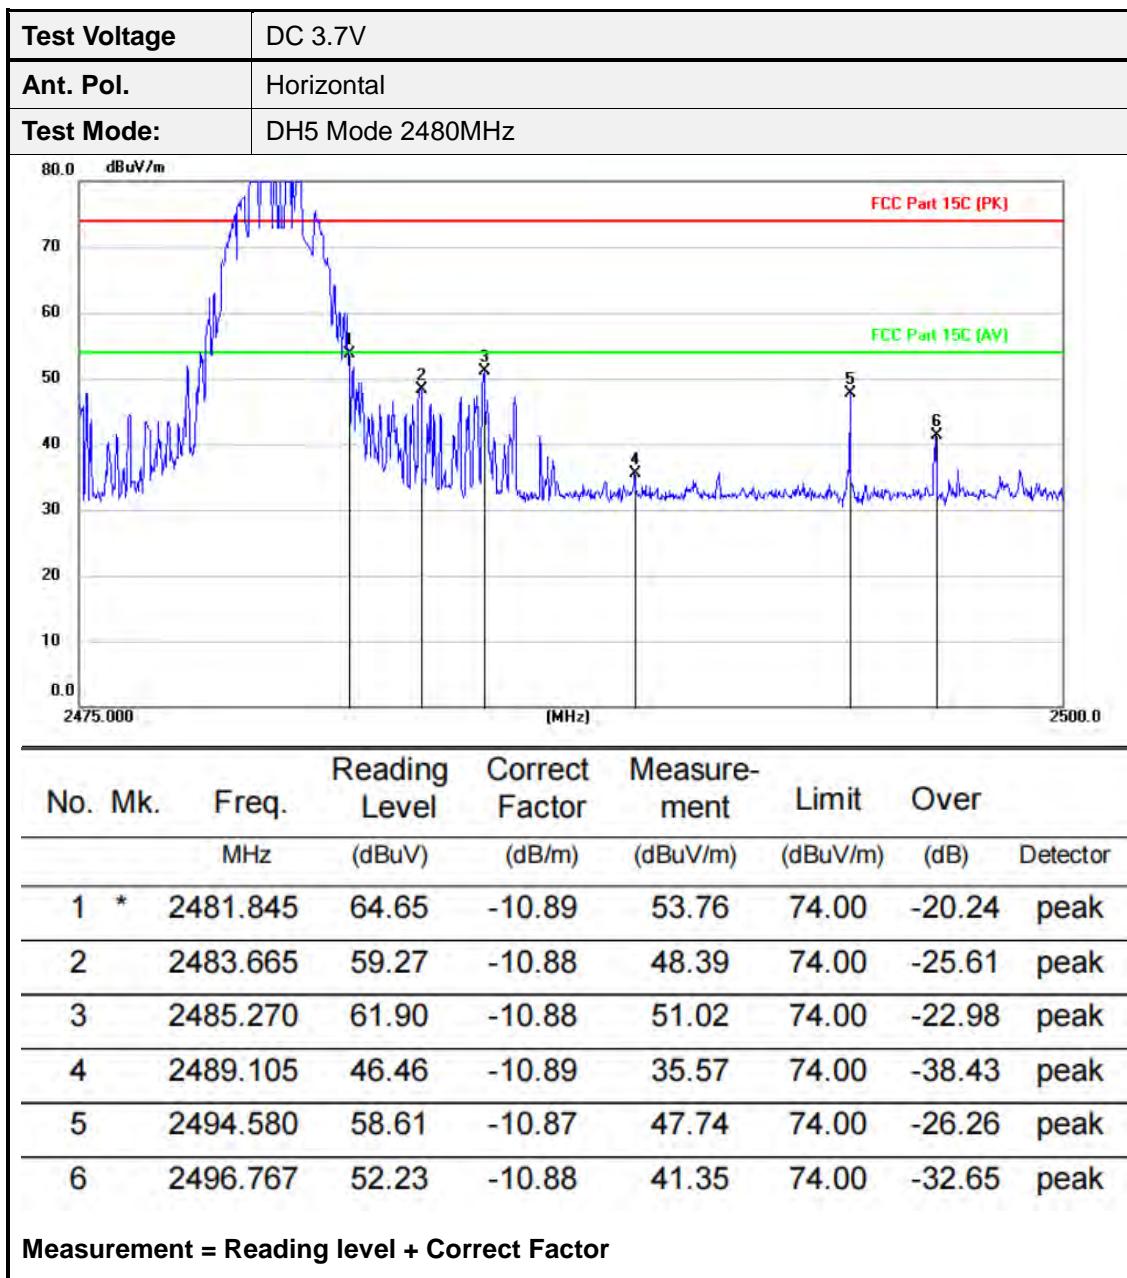

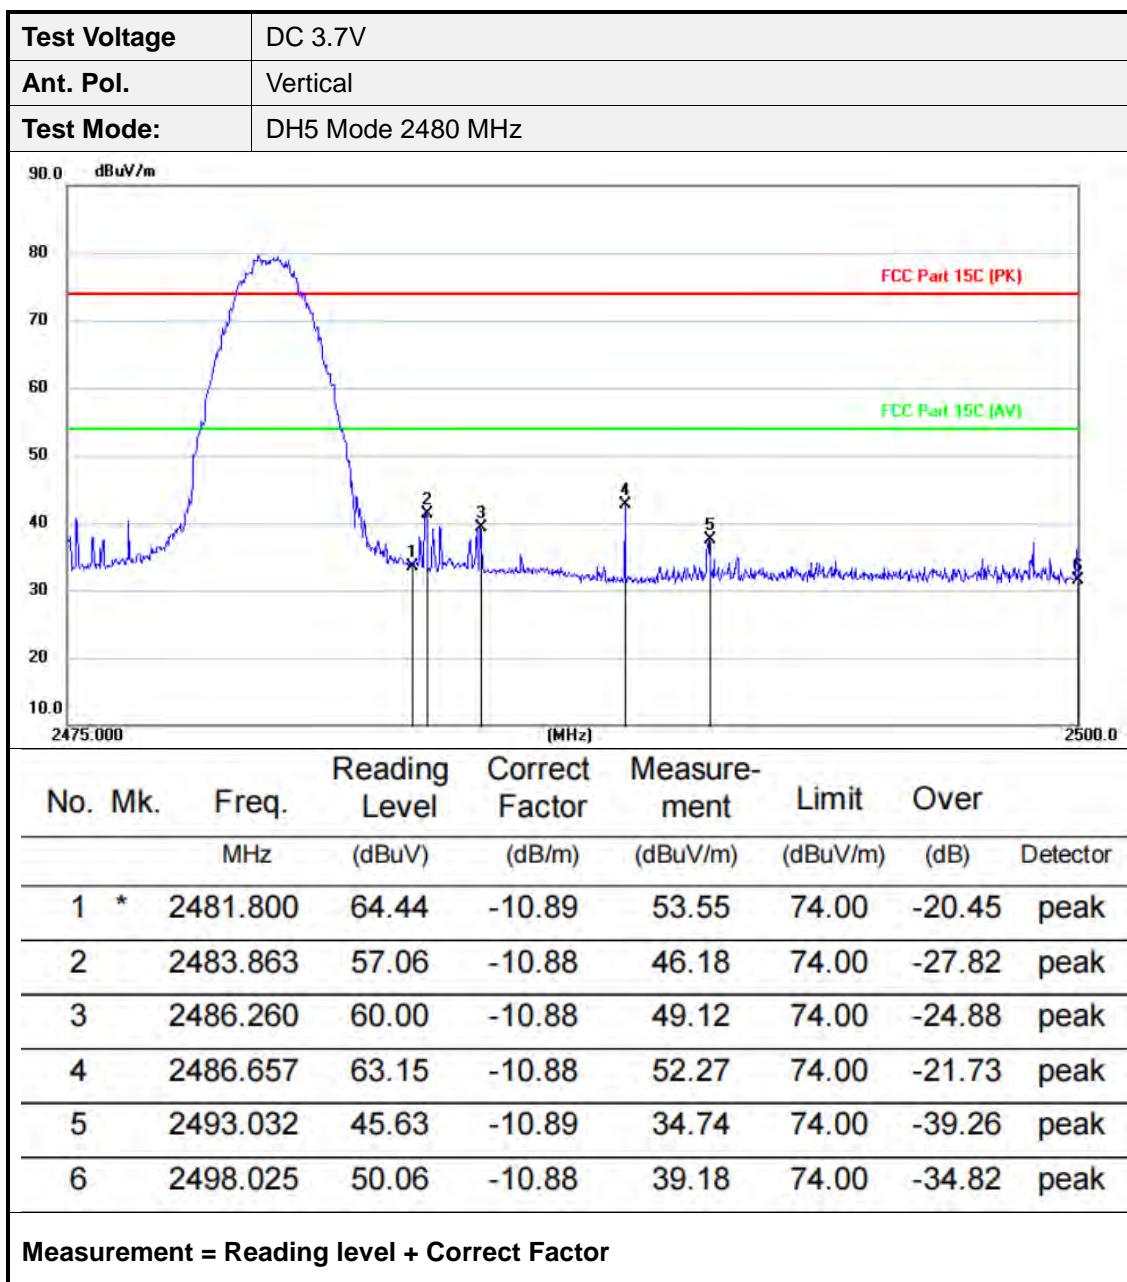


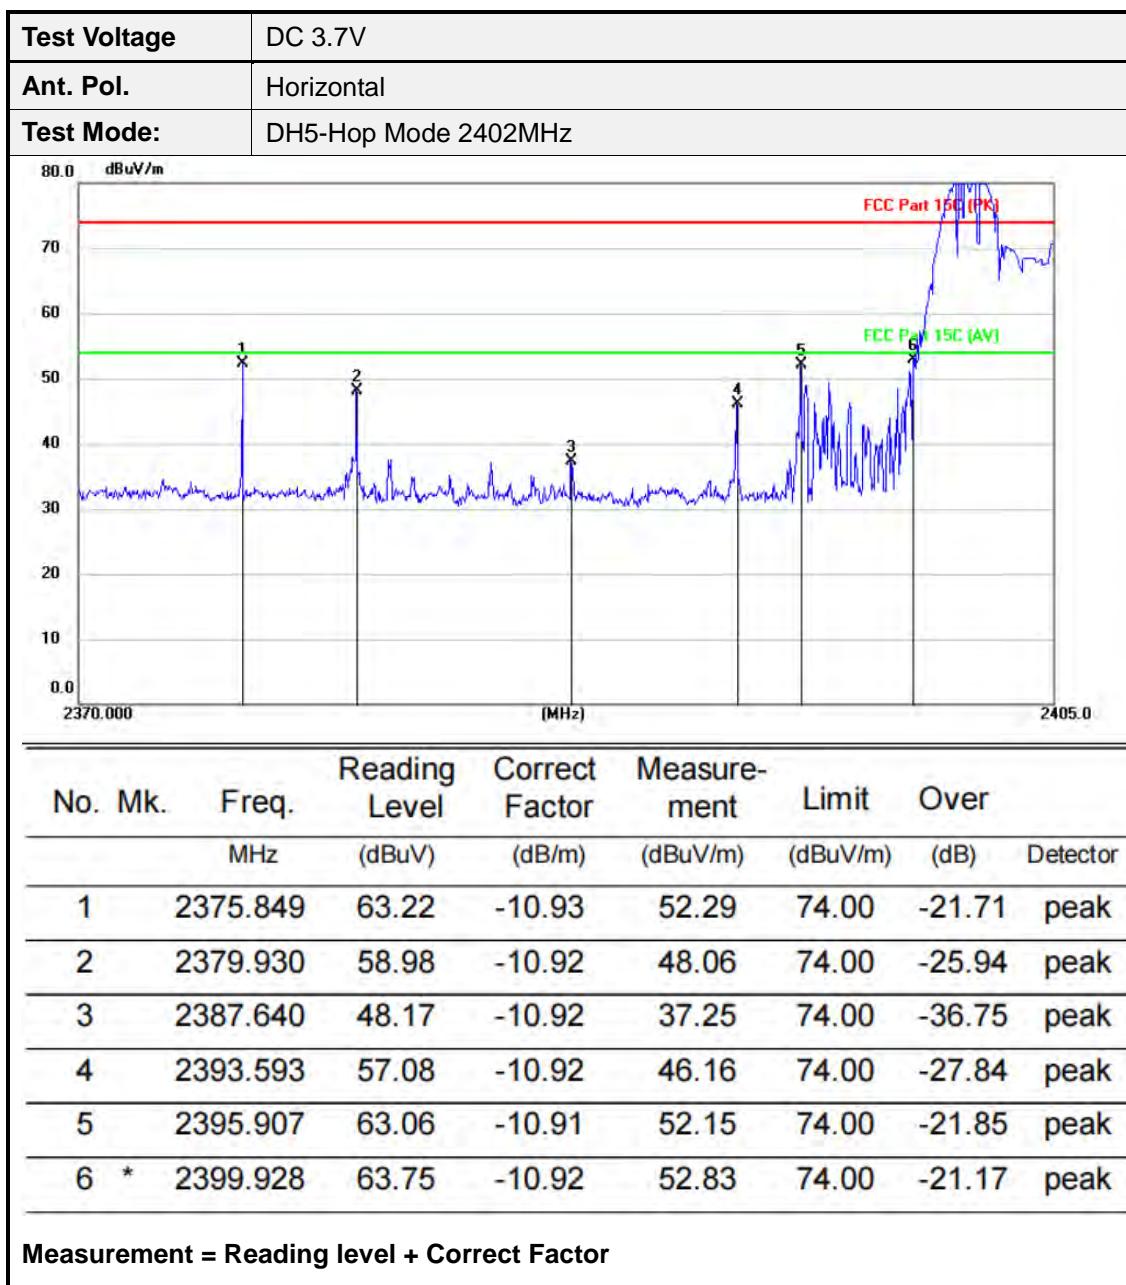


TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

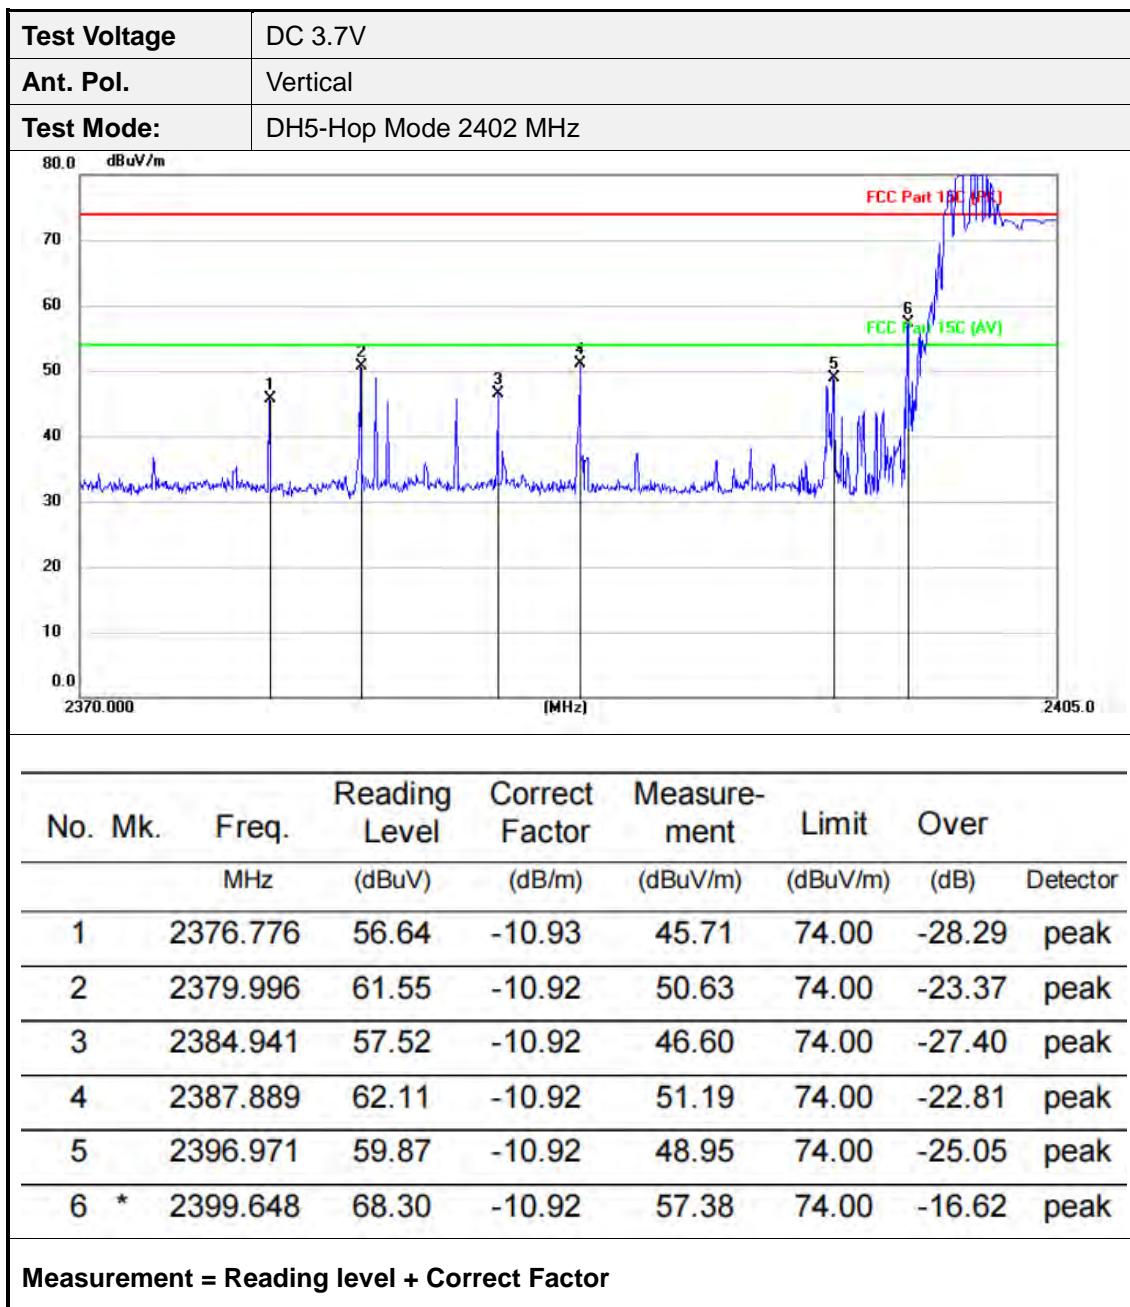


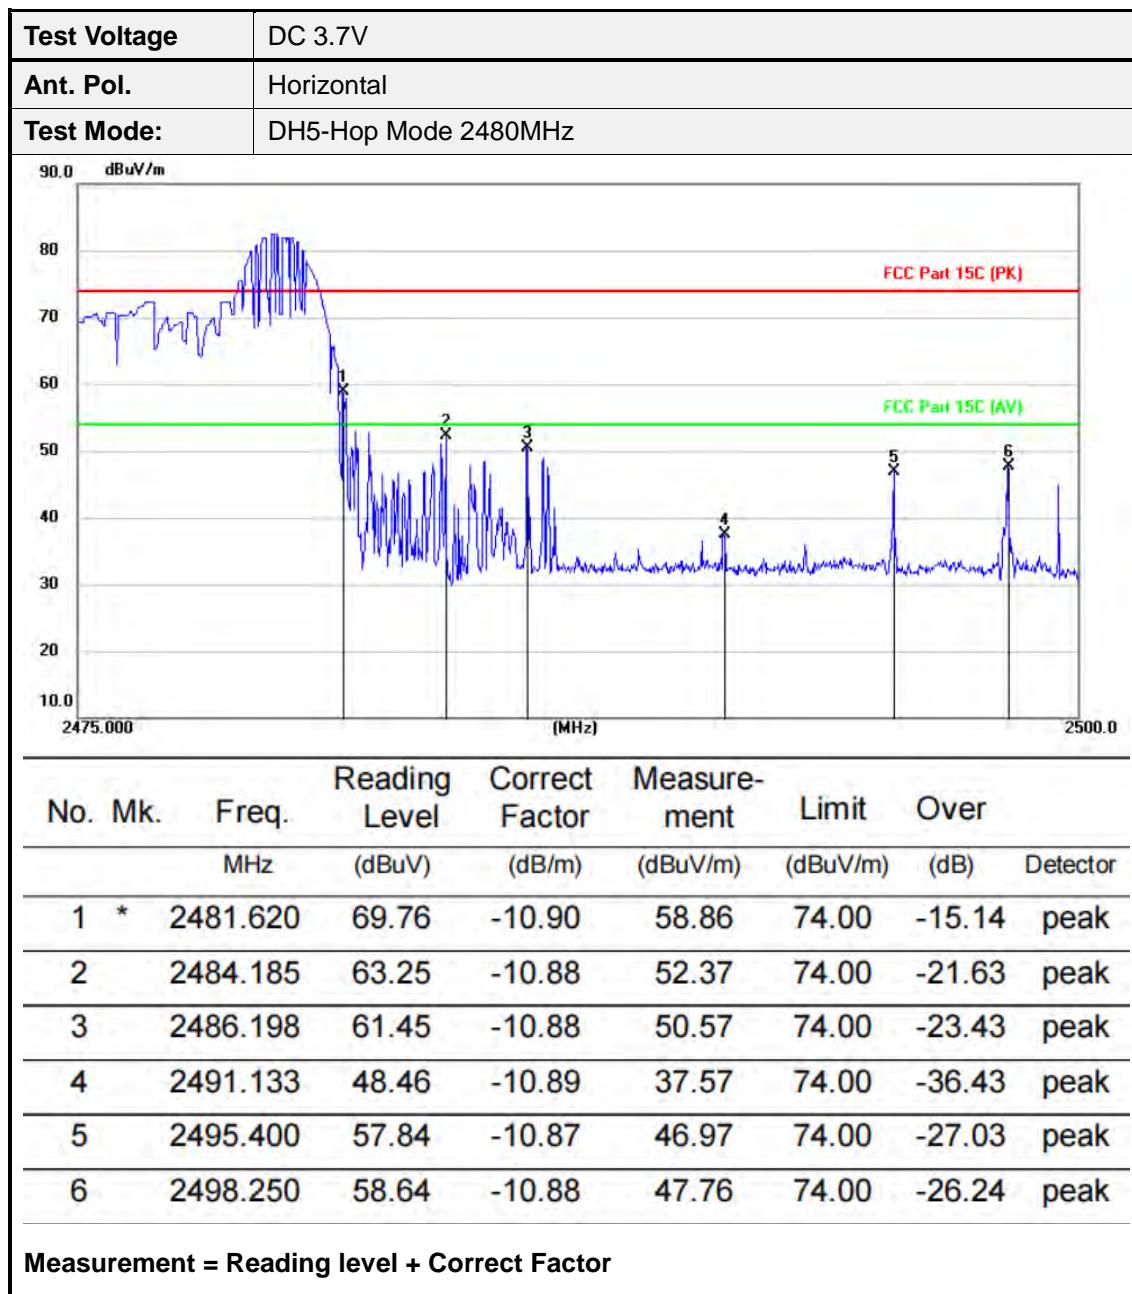

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

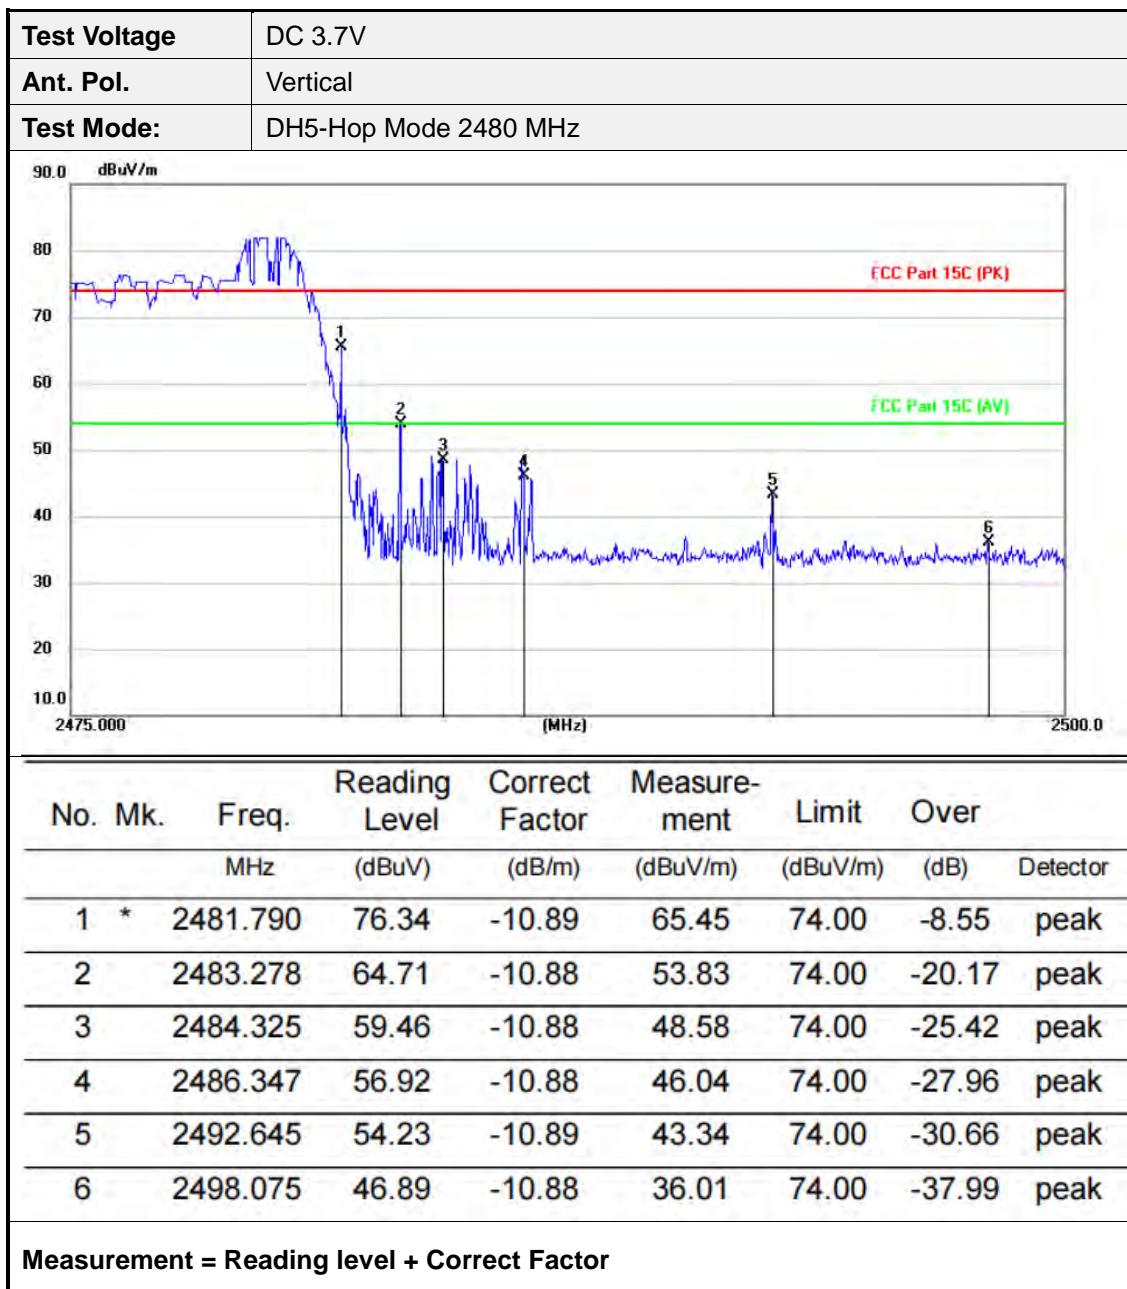

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

### 3.9. Radiated Spurious Emissions

#### Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


#### Test Configuration

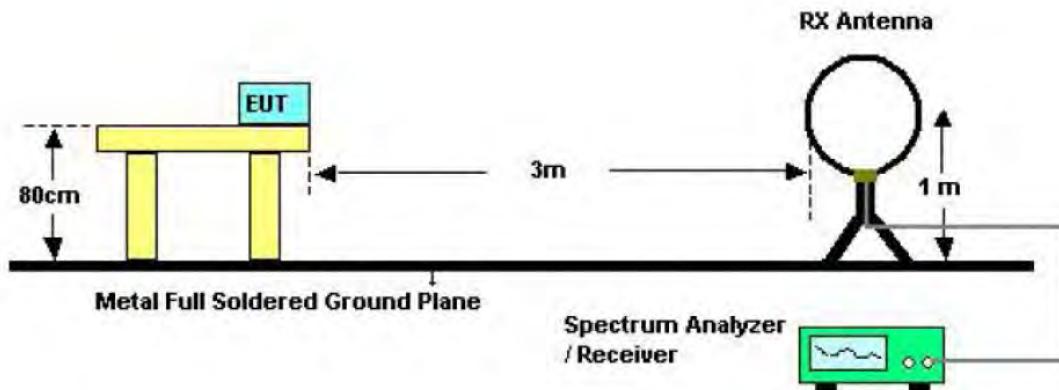

Below 30MHz Test Setup

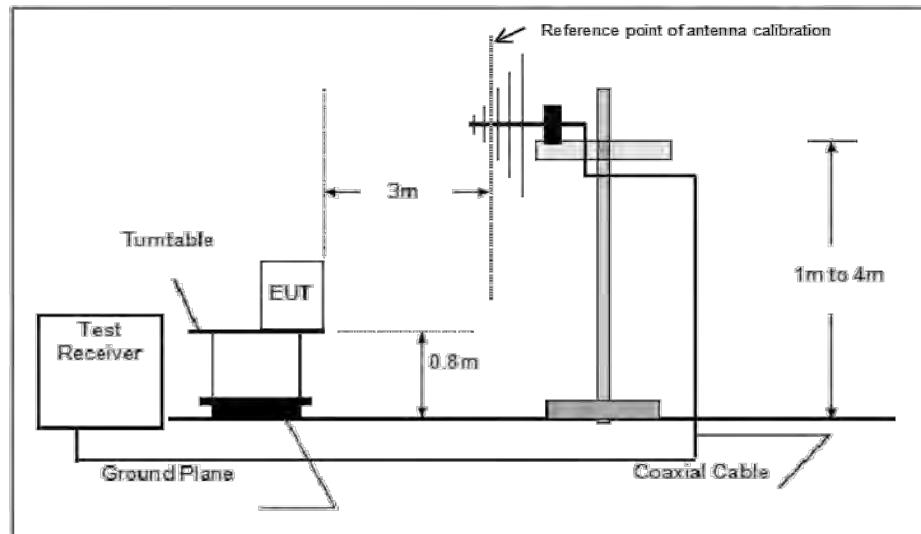

Below 1000MHz Test Setup

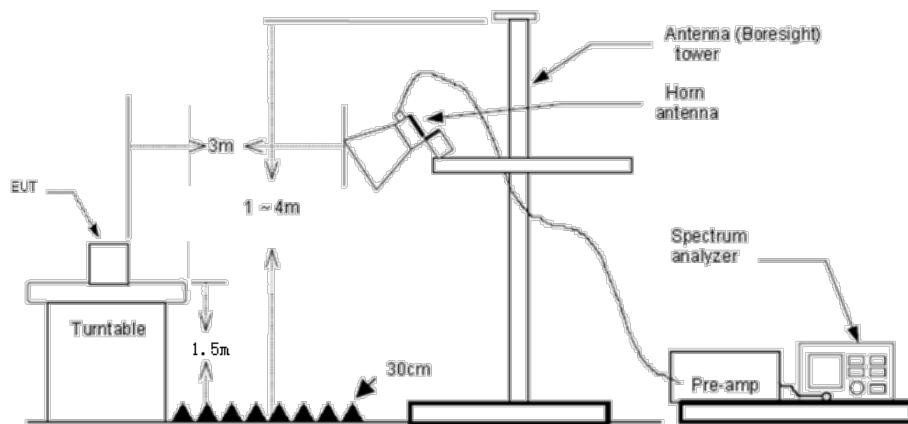

Above 1GHz Test Setup

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings

- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

- (3) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW=10Hz Peak detector for Peak value.

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

**Test Mode**

Please refer to the clause 2.2.

**Test Result****9 KHz~30 MHz and 18GHz~25GHz**

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS


Note:

- 1) Measurement = Reading level + Correct Factor  
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan DH5, 2DH5 and 3DH5 modulation, found the DH5-CH00 Channel Below 1GHz and found the DH5 modulation which it is worse case for above 1GHz, so only show the test data for worse case.

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.


30MHz-1GHz

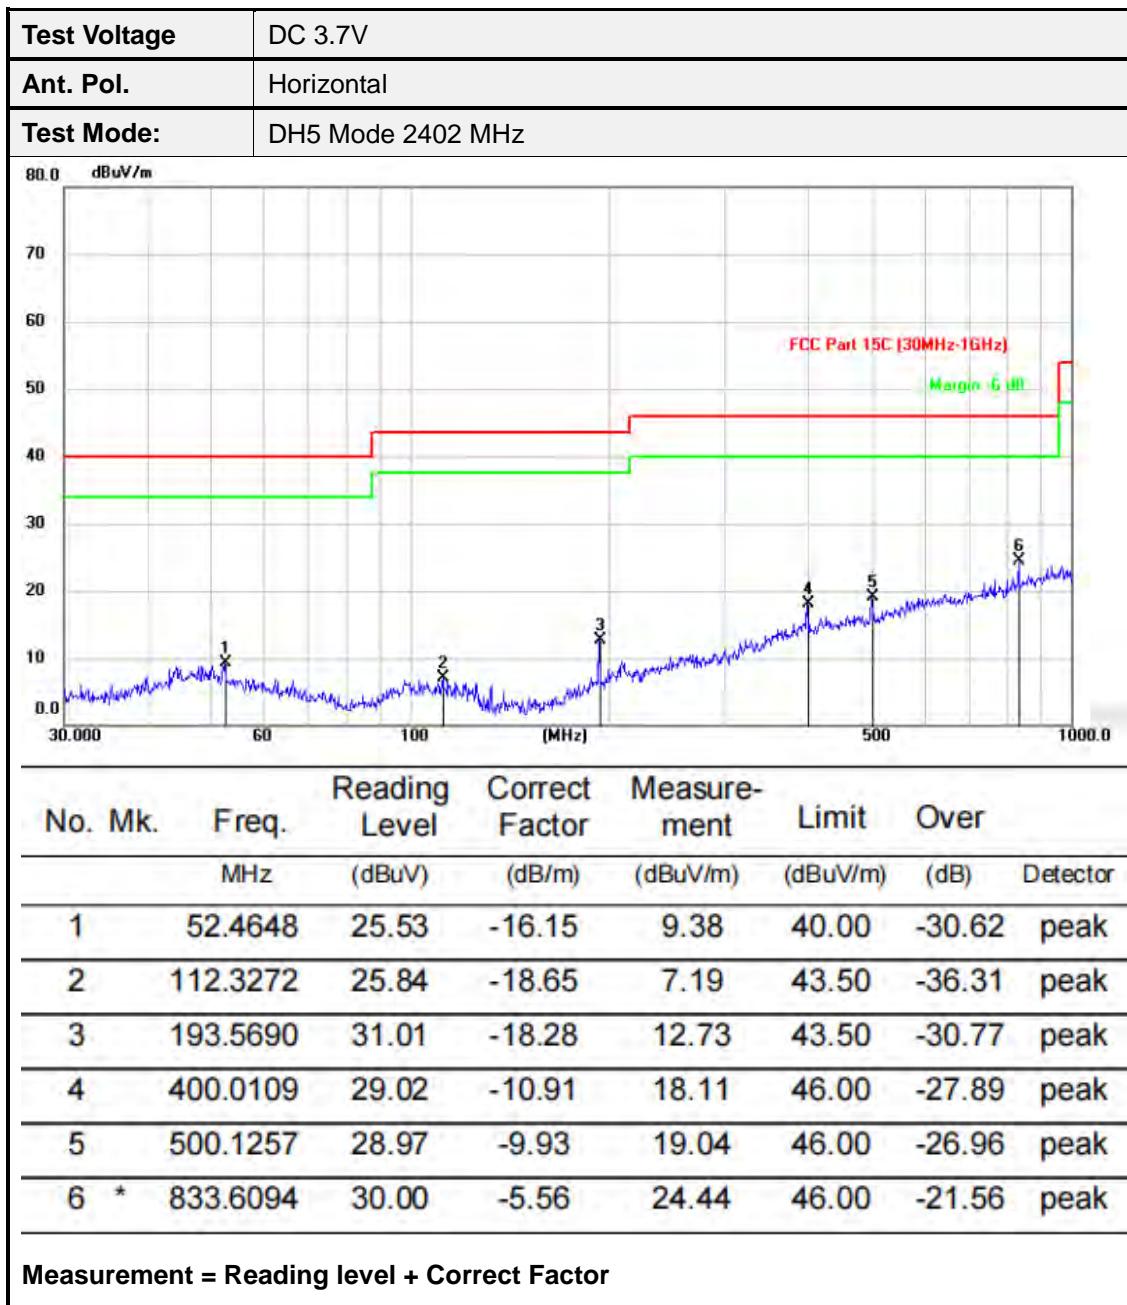


TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

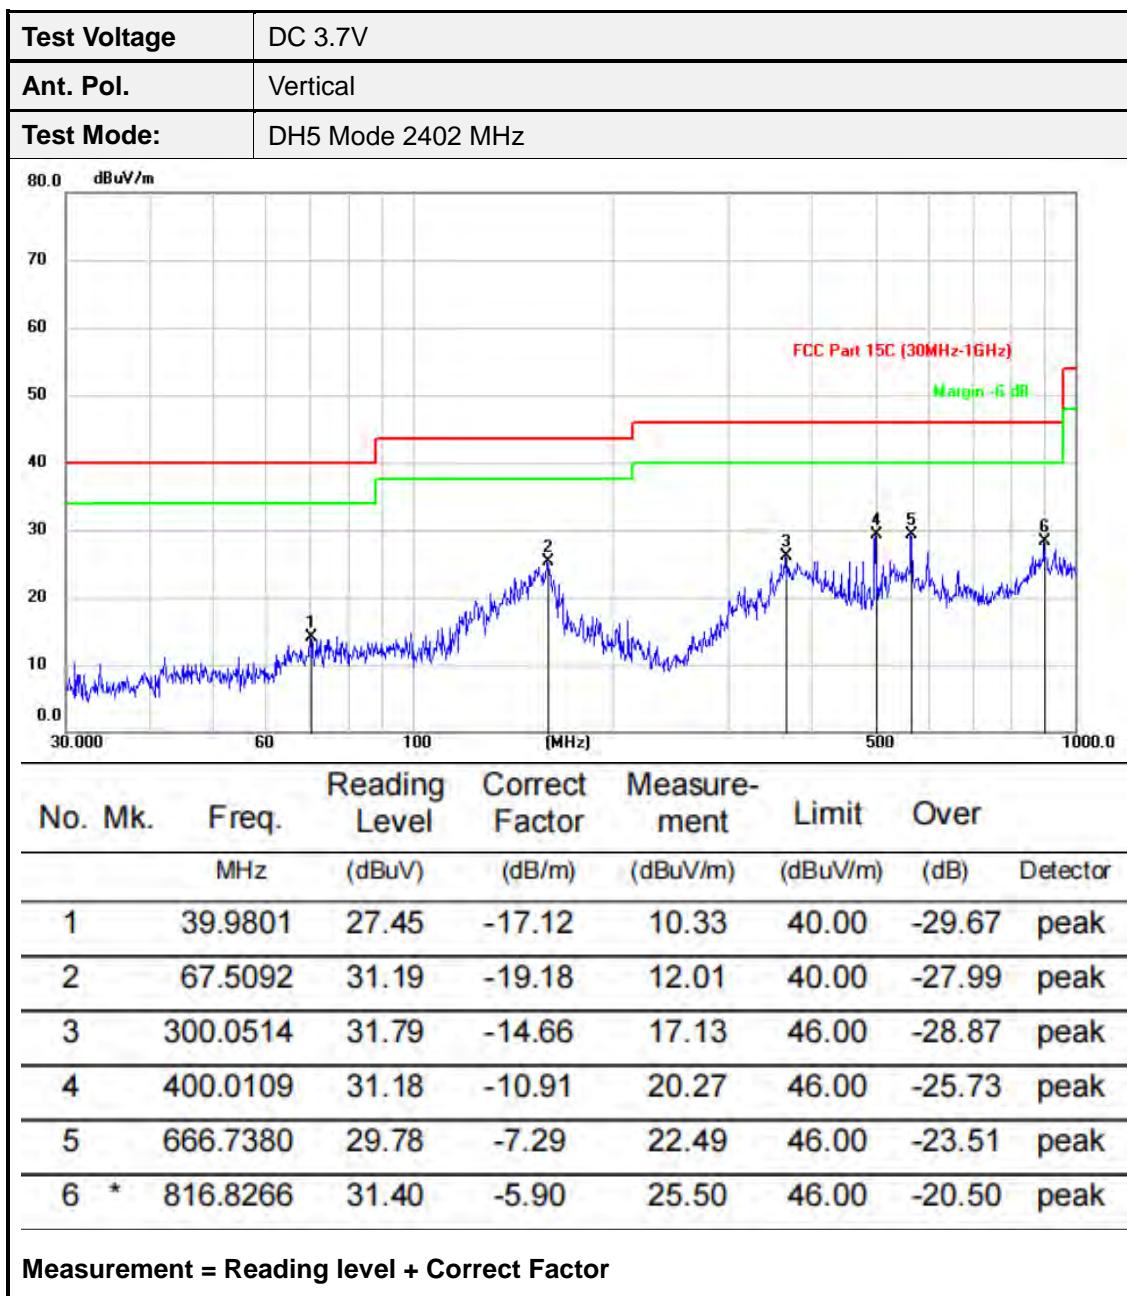


Adobe 1GHz

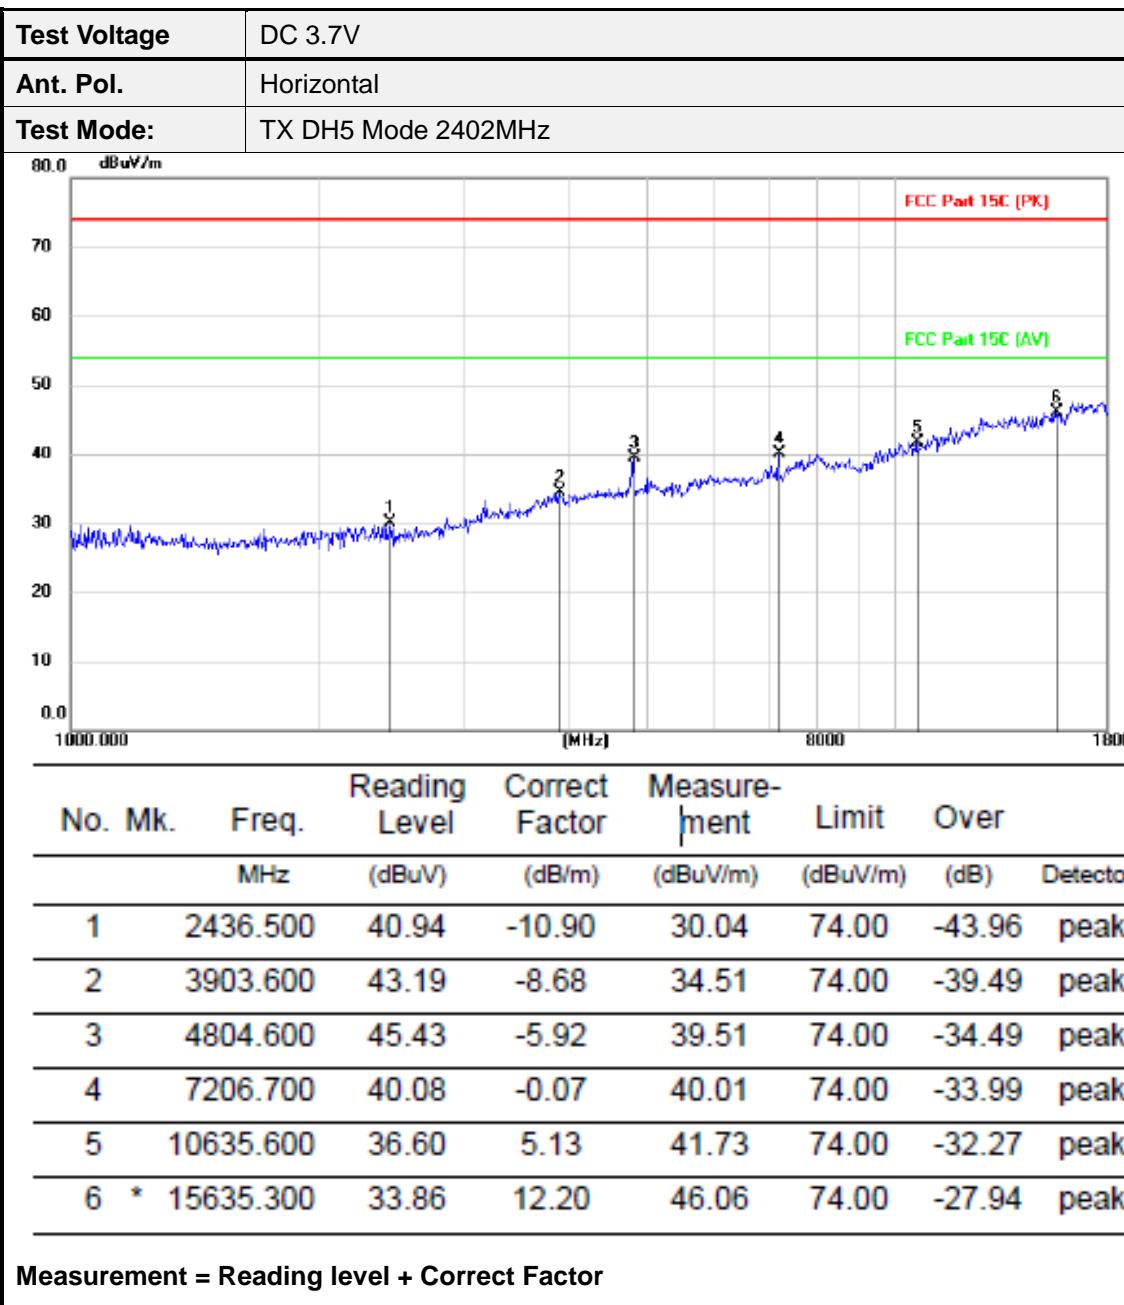


TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

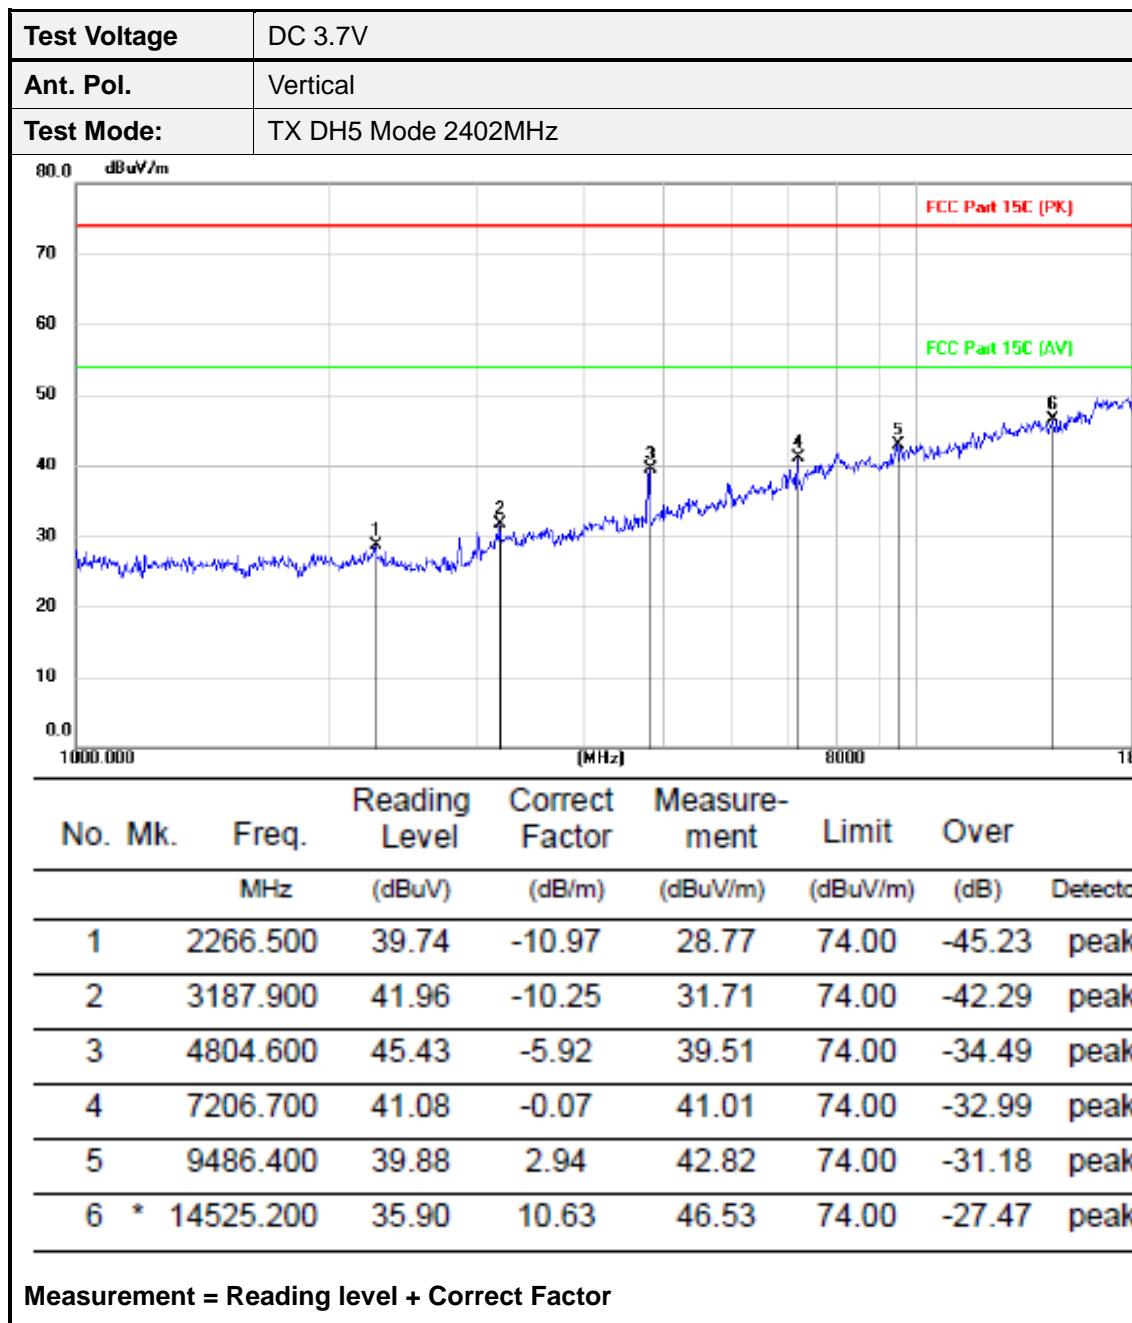


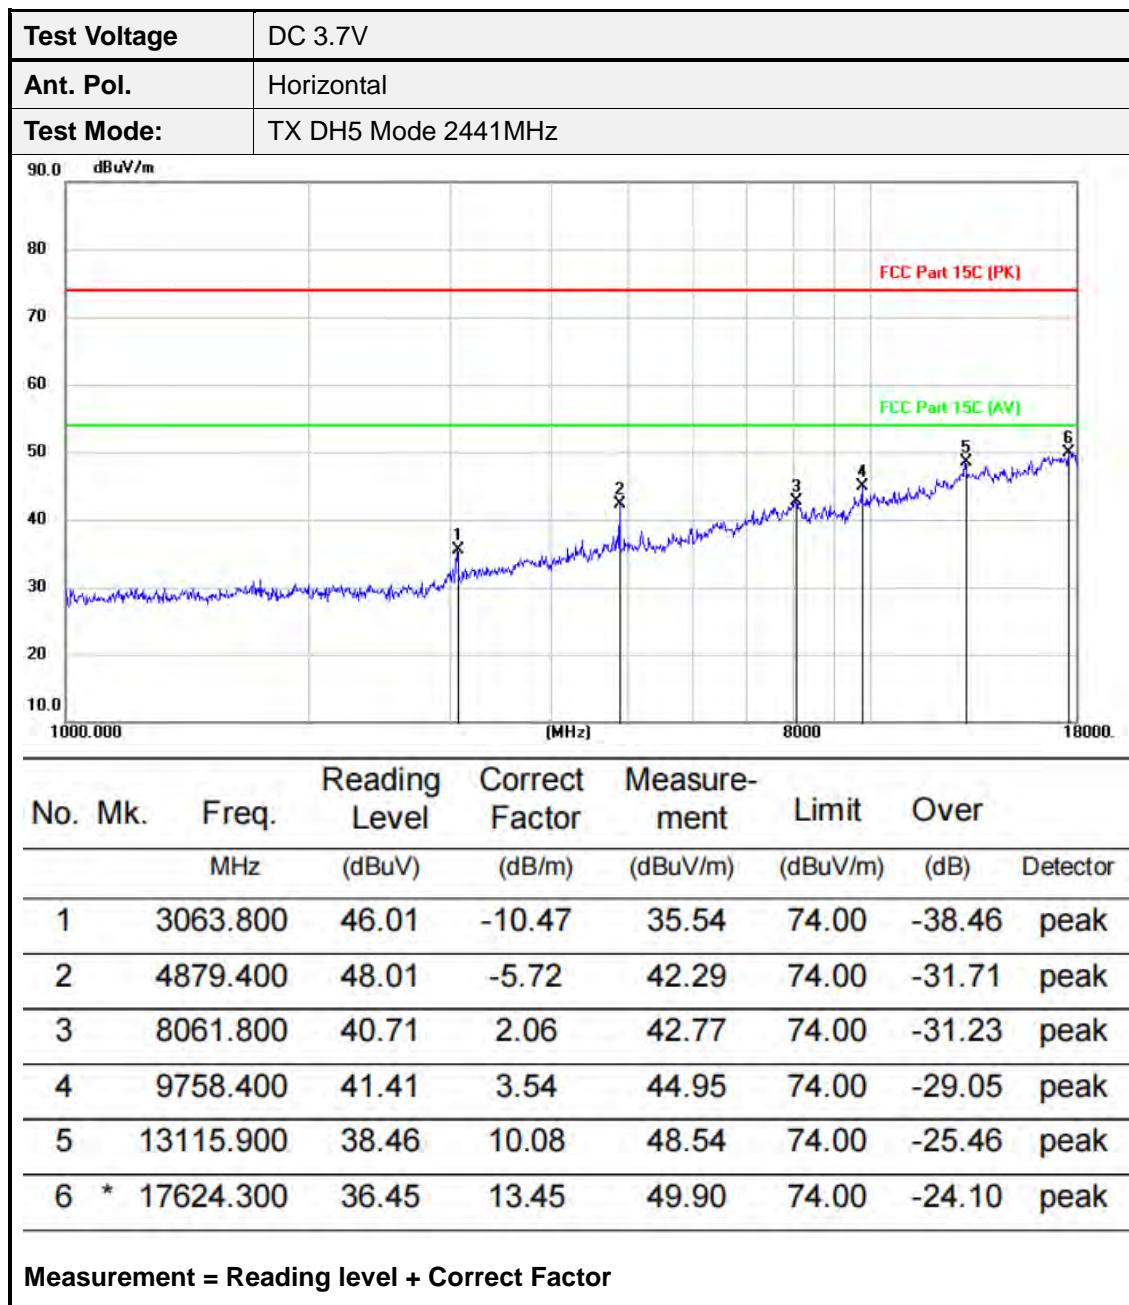

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

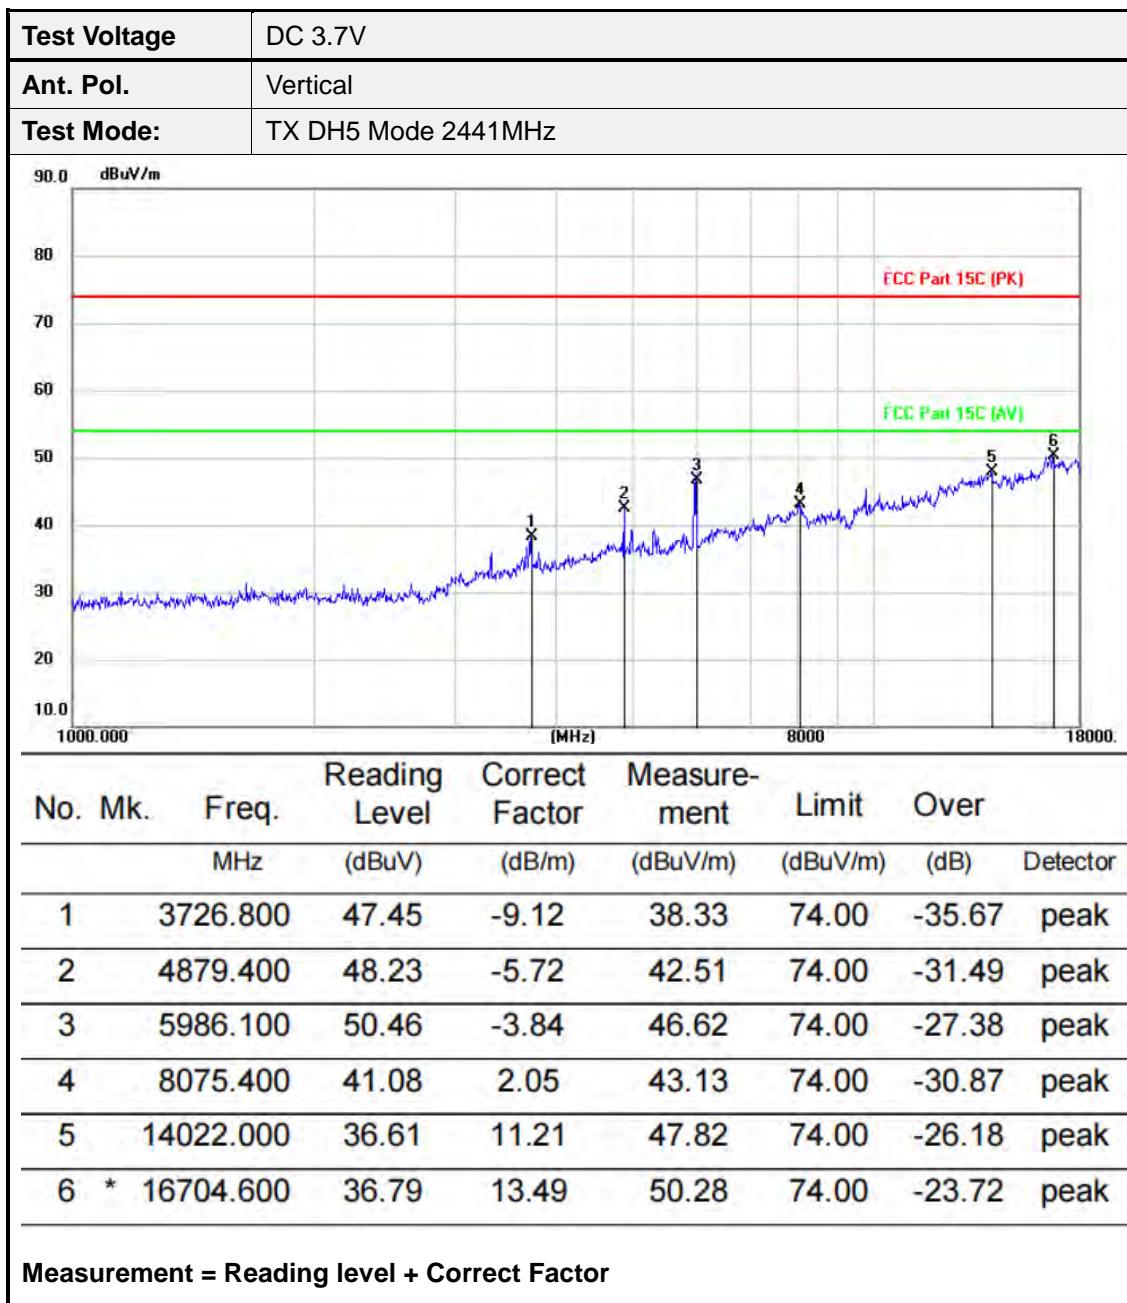

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

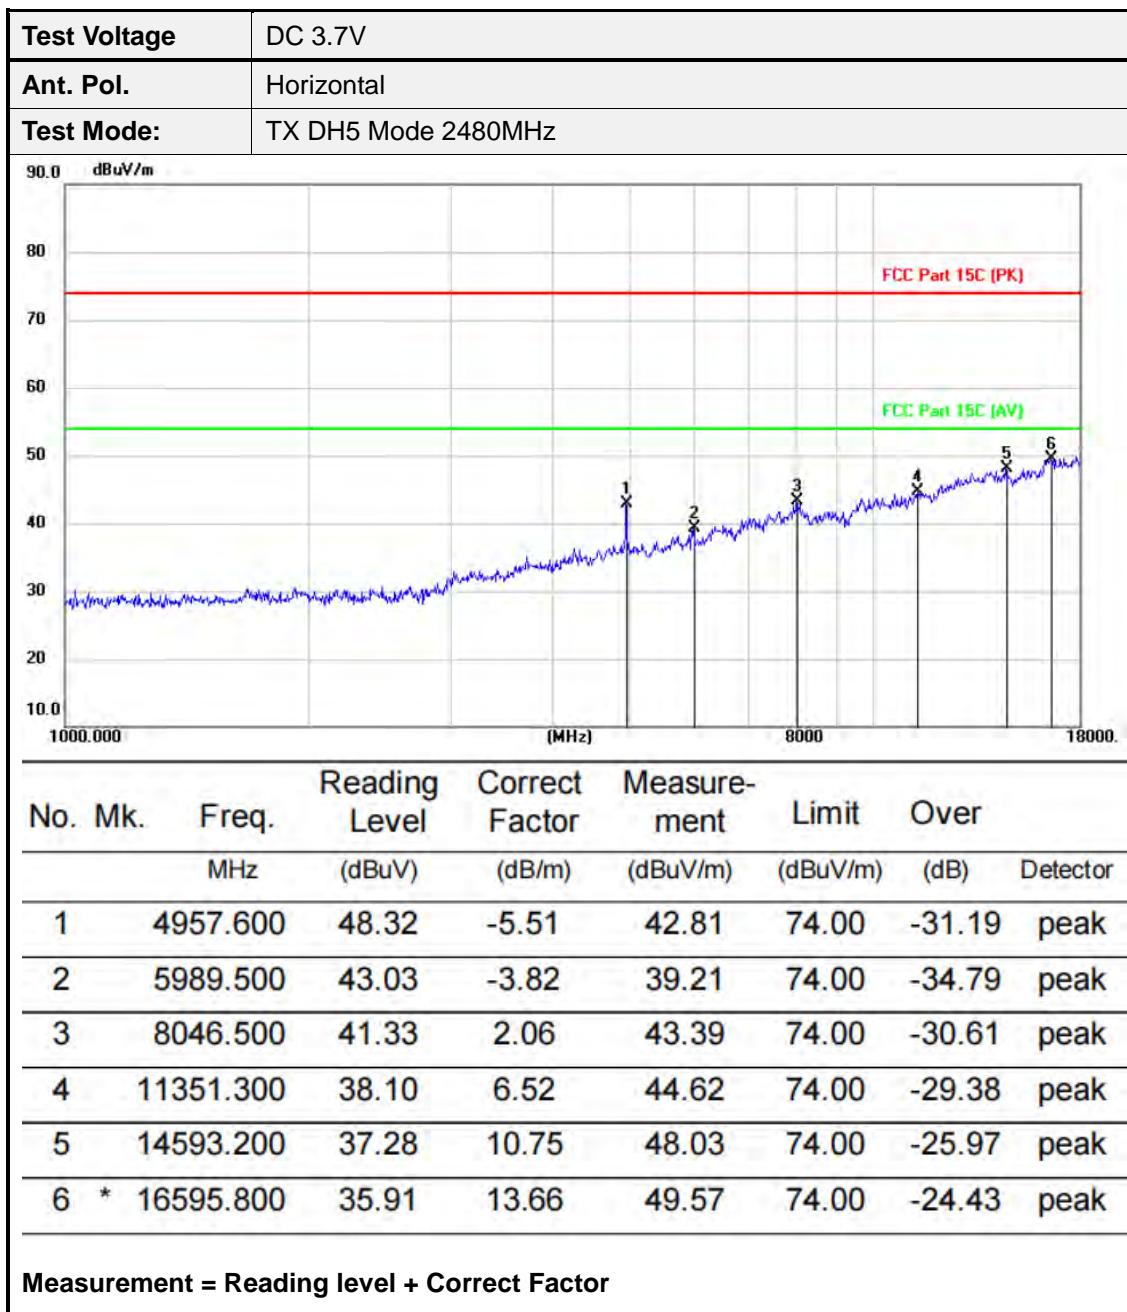

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

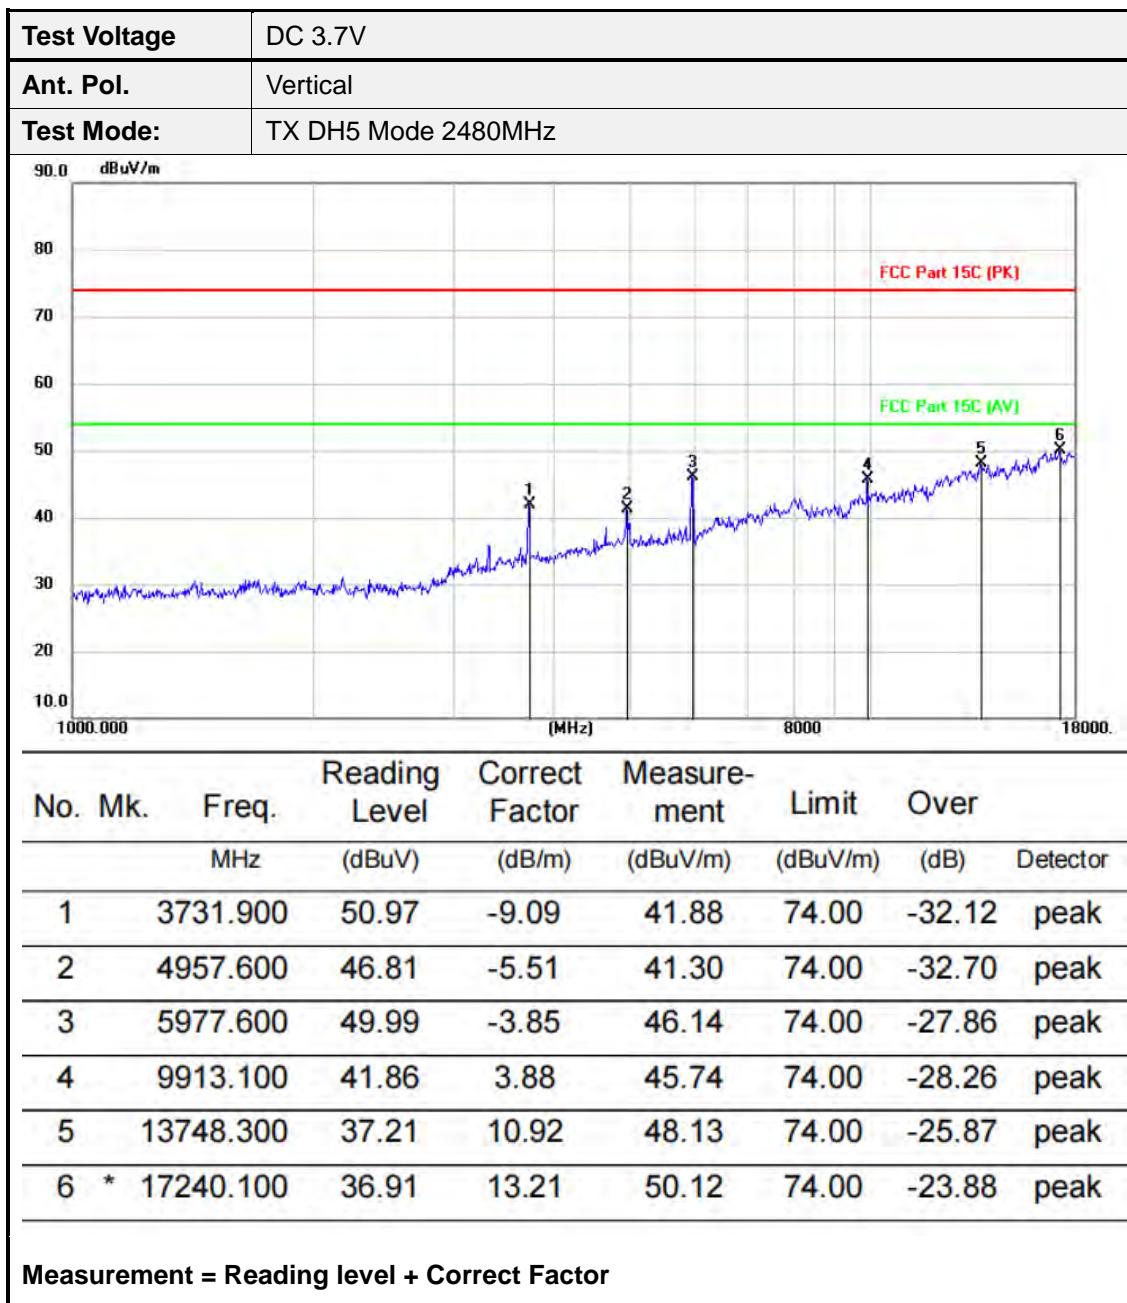

Note:

1. All test modes had been tested. The GFSK(DH5) modulation is the worst case and recorded in the report.
2. 18GHz-26.5GHz is the background of the site, there is no radiated spurious.

## 3.10. Conducted Emission

### Limit


#### Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Configuration

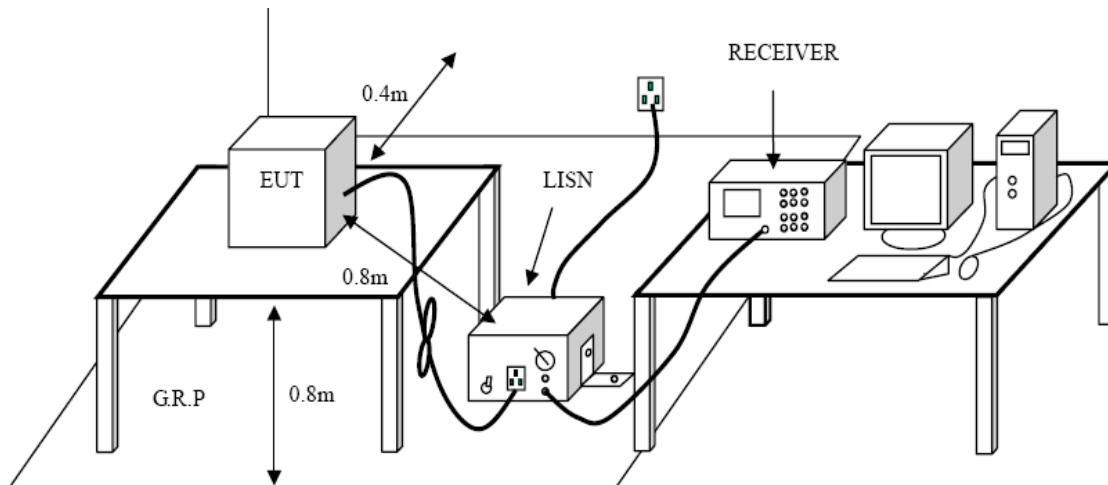

### Test Procedure

1. The EUT was setup according to ANSI C63.10:2020 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

### Test Mode:

Please refer to the clause 2.2


TRF No. FCC Part 15.247\_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

**Test Results**

Pre-scan DH5, 2DH5,3DH5 modulation, and found the DH5 modulation 2402MHz which it is worse case, so only show the test data for worse case.
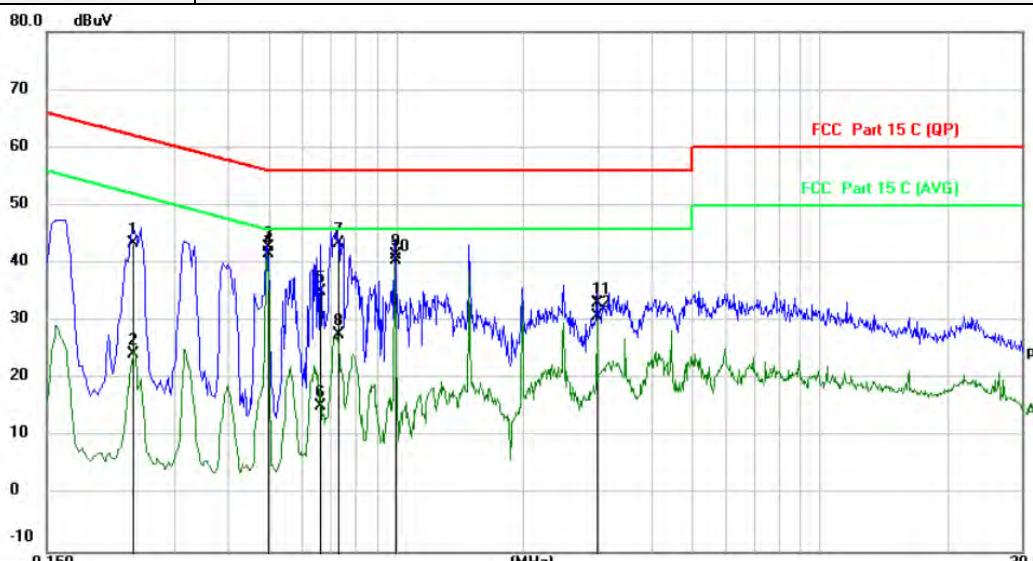
<b>Test Voltage:</b>	AC 120V/60Hz																																																																																																																						
<b>Terminal:</b>	Line																																																																																																																						
																																																																																																																							
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure-ment</th> <th>Limit</th> <th>Over</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td></td><td>0.2381</td><td>32.61</td><td>10.74</td><td>43.35</td><td>62.16</td><td>-18.81</td></tr> <tr><td>2</td><td></td><td>0.2381</td><td>13.65</td><td>10.74</td><td>24.39</td><td>52.16</td><td>-27.77</td></tr> <tr><td>3</td><td></td><td>0.4975</td><td>32.37</td><td>10.38</td><td>42.75</td><td>56.04</td><td>-13.29</td></tr> <tr><td>4</td><td>*</td><td>0.4975</td><td>31.32</td><td>10.38</td><td>41.70</td><td>46.04</td><td>-4.34</td></tr> <tr><td>5</td><td></td><td>0.6635</td><td>24.71</td><td>10.45</td><td>35.16</td><td>56.00</td><td>-20.84</td></tr> <tr><td>6</td><td></td><td>0.6635</td><td>4.96</td><td>10.45</td><td>15.41</td><td>46.00</td><td>-30.59</td></tr> <tr><td>7</td><td></td><td>0.7300</td><td>33.02</td><td>10.44</td><td>43.46</td><td>56.00</td><td>-12.54</td></tr> <tr><td>8</td><td></td><td>0.7300</td><td>17.31</td><td>10.44</td><td>27.75</td><td>46.00</td><td>-18.25</td></tr> <tr><td>9</td><td></td><td>0.9946</td><td>30.88</td><td>10.51</td><td>41.39</td><td>56.00</td><td>-14.61</td></tr> <tr><td>10</td><td></td><td>0.9946</td><td>30.00</td><td>10.51</td><td>40.51</td><td>46.00</td><td>-5.49</td></tr> <tr><td>11</td><td></td><td>2.9854</td><td>22.36</td><td>10.62</td><td>32.98</td><td>56.00</td><td>-23.02</td></tr> <tr><td>12</td><td></td><td>2.9854</td><td>20.27</td><td>10.62</td><td>30.89</td><td>46.00</td><td>-15.11</td></tr> </tbody> </table>								No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over			MHz	dBuV	dB	dBuV	dBuV	dB	1		0.2381	32.61	10.74	43.35	62.16	-18.81	2		0.2381	13.65	10.74	24.39	52.16	-27.77	3		0.4975	32.37	10.38	42.75	56.04	-13.29	4	*	0.4975	31.32	10.38	41.70	46.04	-4.34	5		0.6635	24.71	10.45	35.16	56.00	-20.84	6		0.6635	4.96	10.45	15.41	46.00	-30.59	7		0.7300	33.02	10.44	43.46	56.00	-12.54	8		0.7300	17.31	10.44	27.75	46.00	-18.25	9		0.9946	30.88	10.51	41.39	56.00	-14.61	10		0.9946	30.00	10.51	40.51	46.00	-5.49	11		2.9854	22.36	10.62	32.98	56.00	-23.02	12		2.9854	20.27	10.62	30.89	46.00	-15.11
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over																																																																																																																
		MHz	dBuV	dB	dBuV	dBuV	dB																																																																																																																
1		0.2381	32.61	10.74	43.35	62.16	-18.81																																																																																																																
2		0.2381	13.65	10.74	24.39	52.16	-27.77																																																																																																																
3		0.4975	32.37	10.38	42.75	56.04	-13.29																																																																																																																
4	*	0.4975	31.32	10.38	41.70	46.04	-4.34																																																																																																																
5		0.6635	24.71	10.45	35.16	56.00	-20.84																																																																																																																
6		0.6635	4.96	10.45	15.41	46.00	-30.59																																																																																																																
7		0.7300	33.02	10.44	43.46	56.00	-12.54																																																																																																																
8		0.7300	17.31	10.44	27.75	46.00	-18.25																																																																																																																
9		0.9946	30.88	10.51	41.39	56.00	-14.61																																																																																																																
10		0.9946	30.00	10.51	40.51	46.00	-5.49																																																																																																																
11		2.9854	22.36	10.62	32.98	56.00	-23.02																																																																																																																
12		2.9854	20.27	10.62	30.89	46.00	-15.11																																																																																																																
Remarks: 1.Measurement = Reading Level+ Correct Factor 2.Over = Measurement -Limit																																																																																																																							

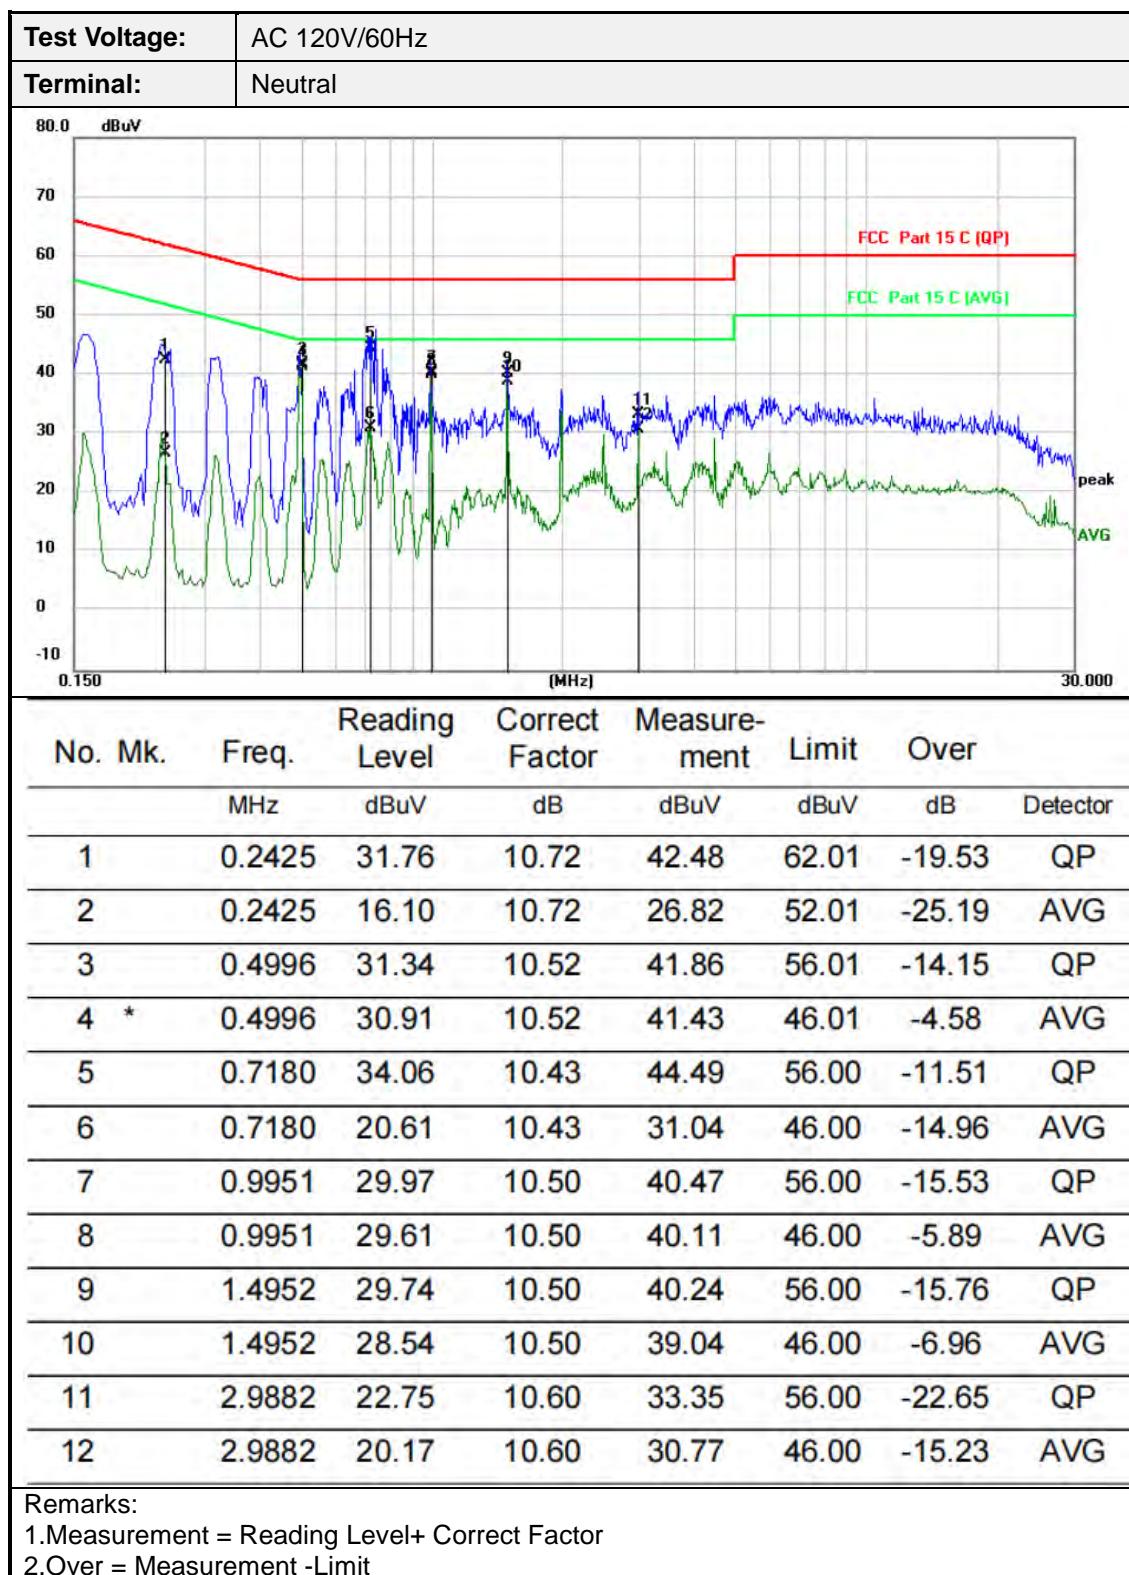

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

## 4. EUT TEST PHOTOS


Radiated Measurement (Below 1GHz)



Radiated Measurement (Above 1GHz)



## Conducted Emission

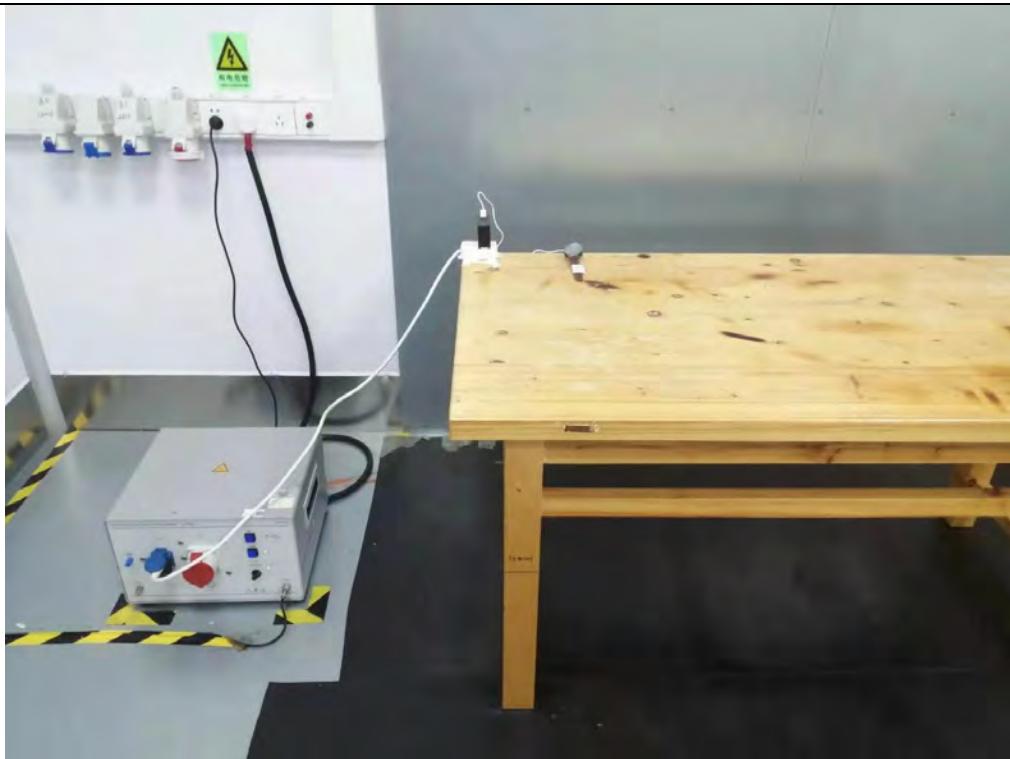

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 5.PHOTOGRAPHS OF EUT CONSTRUCTIONAL

### External Photographs

Photo 1



Photo 2



Photo 3



Photo 4



---

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

Photo 5



Photo 6



TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

Photo 7



Photo 8



---

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## Internal Photographs

Photo 1


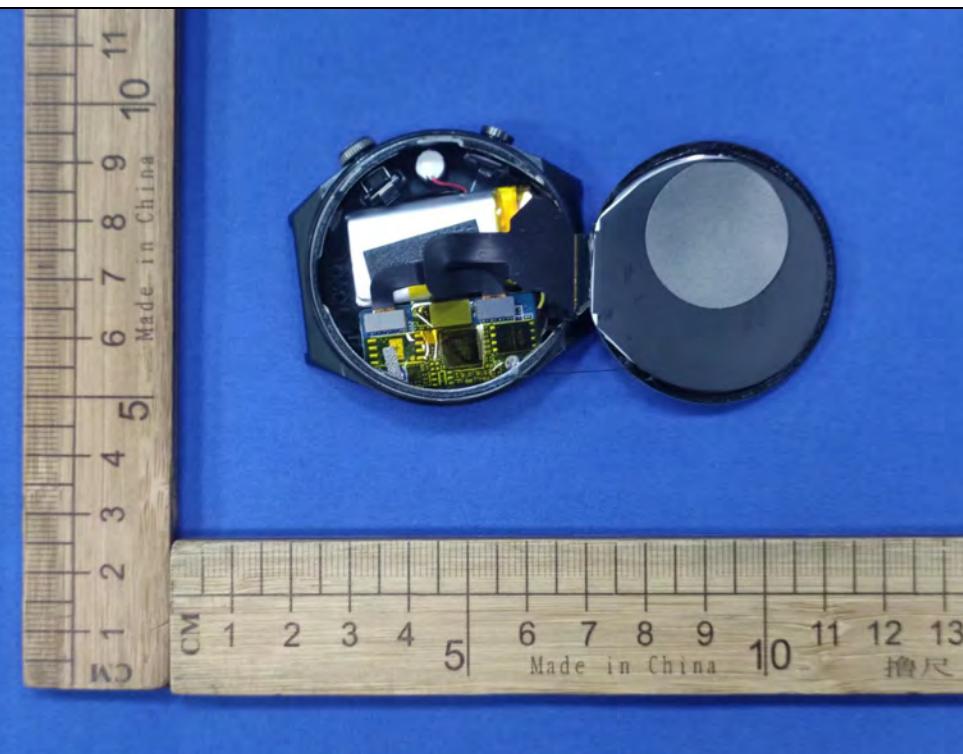


Photo 2

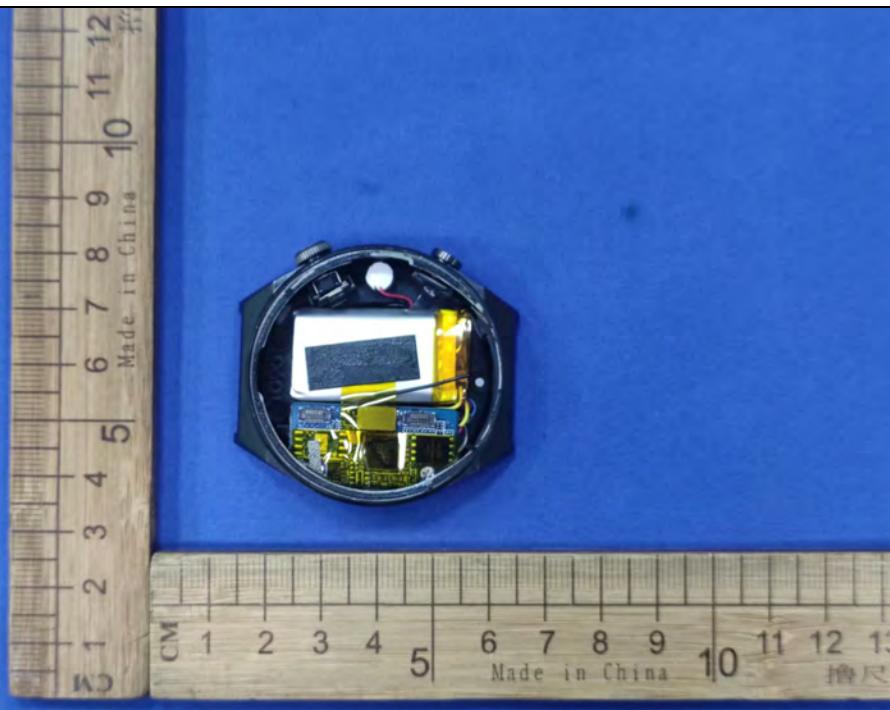

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

Photo 3

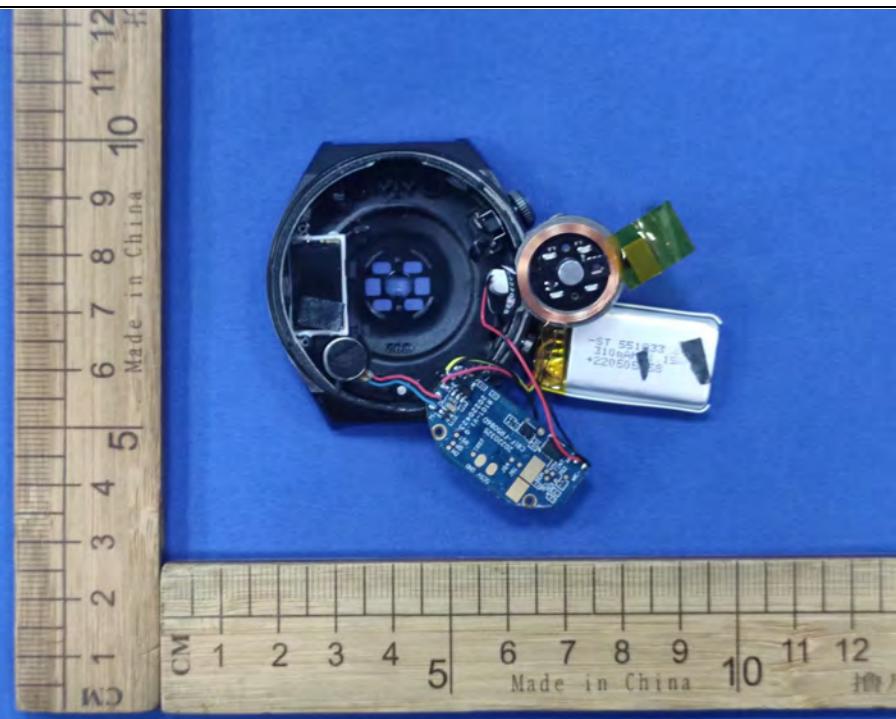


Photo 4

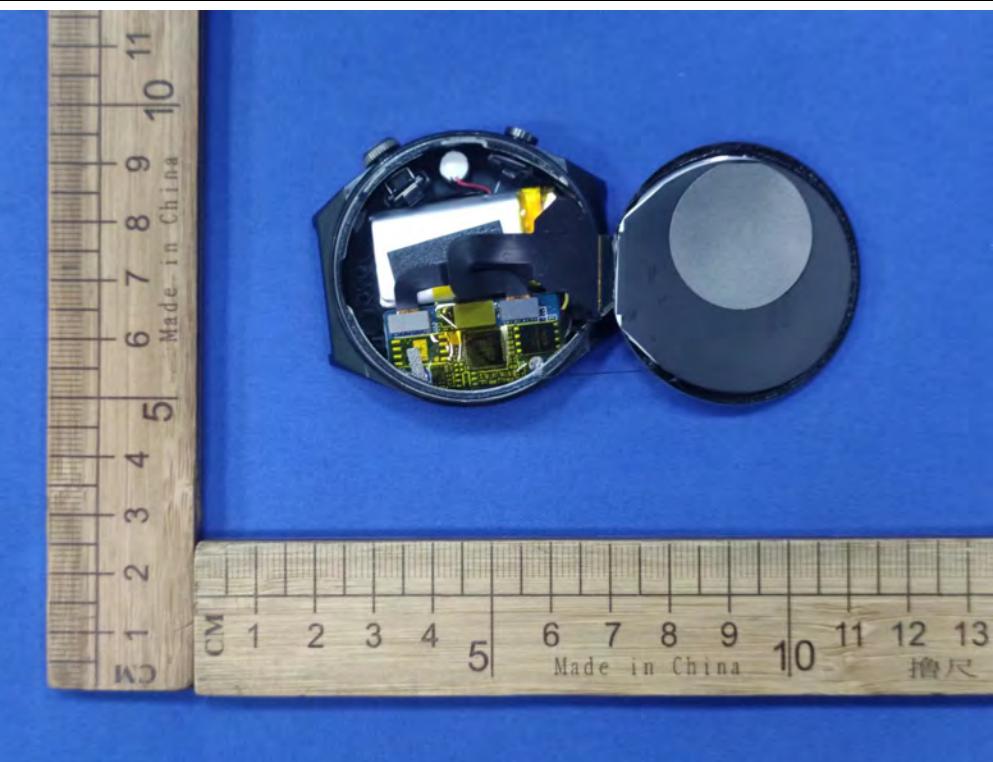


Photo 5


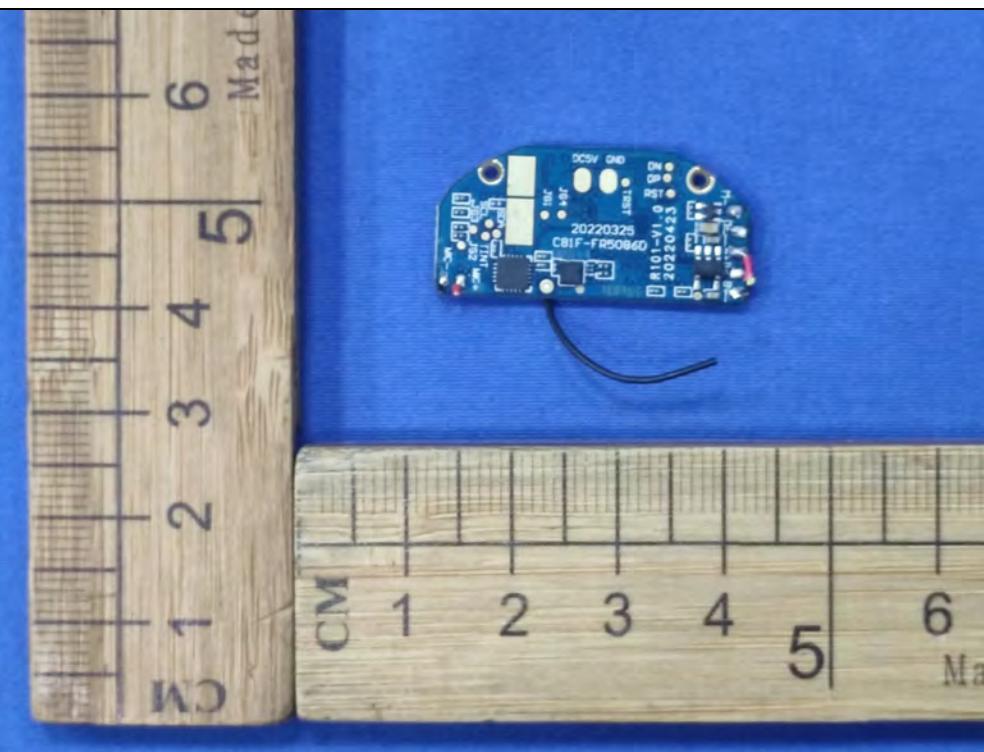


Photo 6

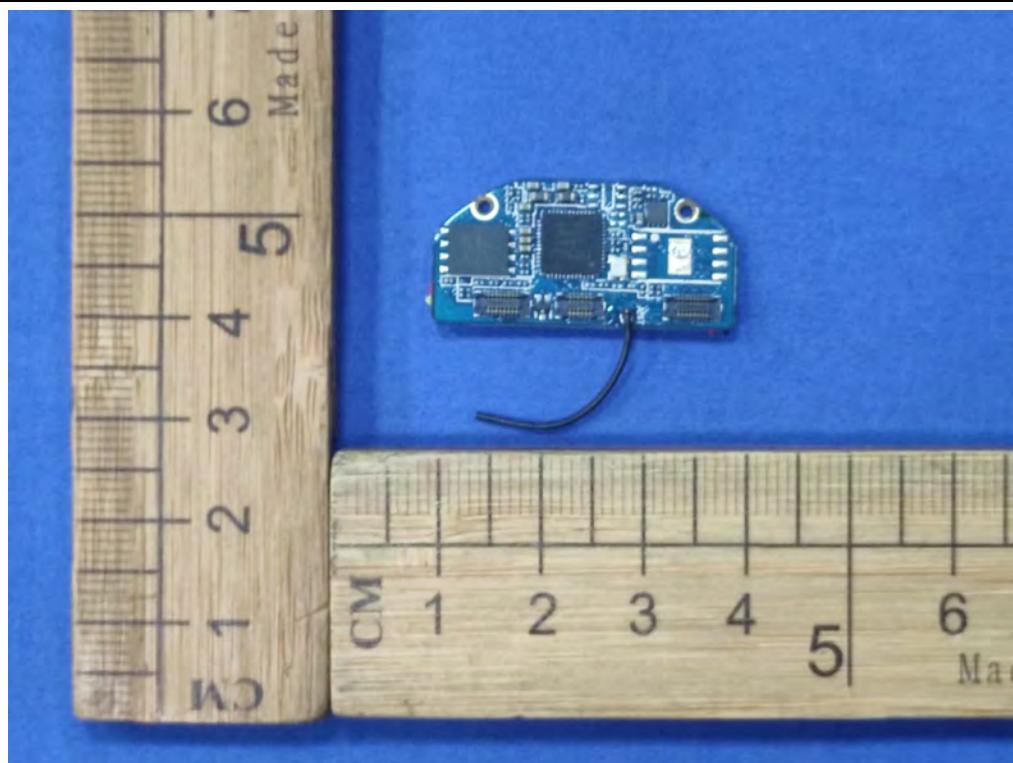

TRF No. FCC Part 15.247\_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail : info@gdksign.cn Web: www.gdksign.com

Photo 7

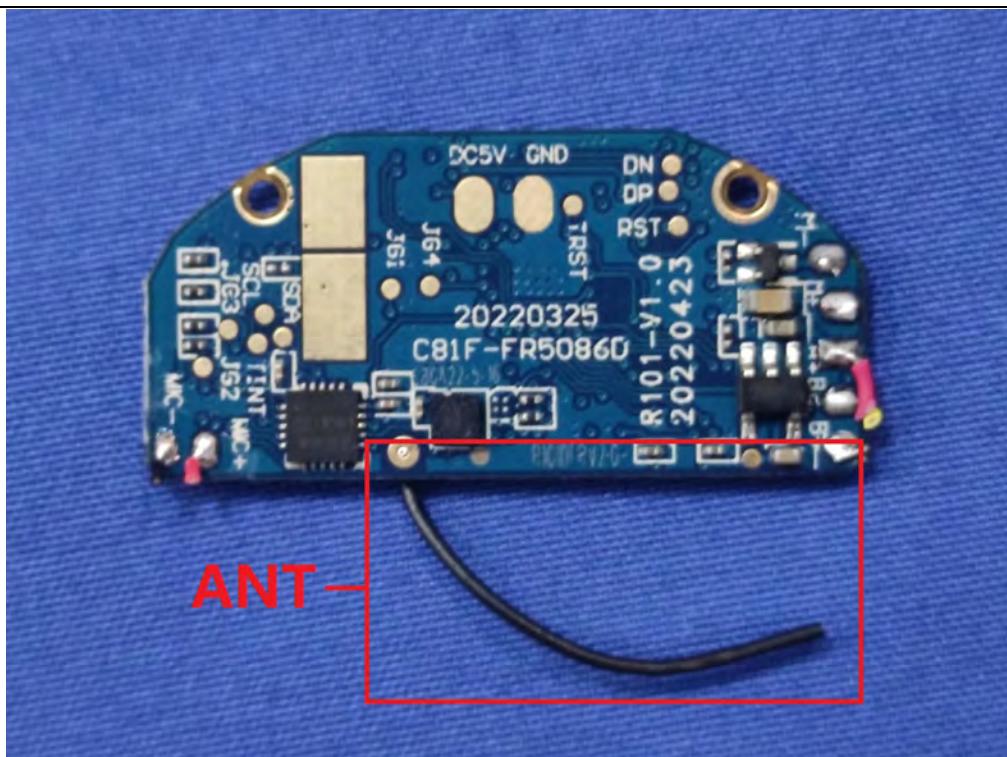


Photo 8

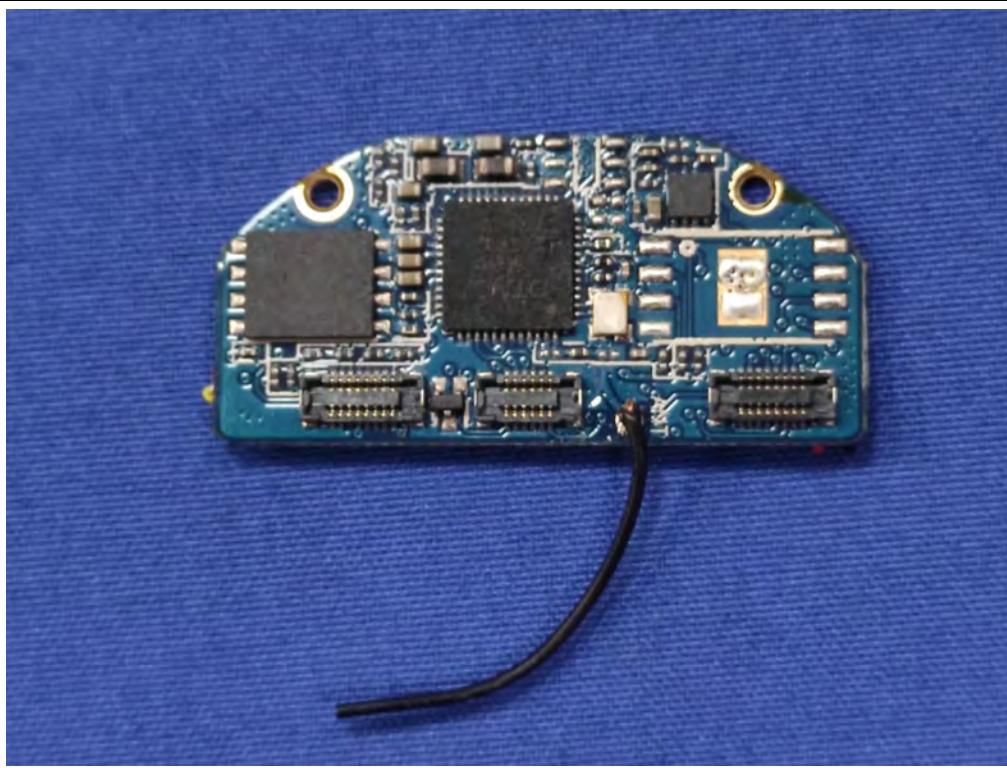


Photo 9

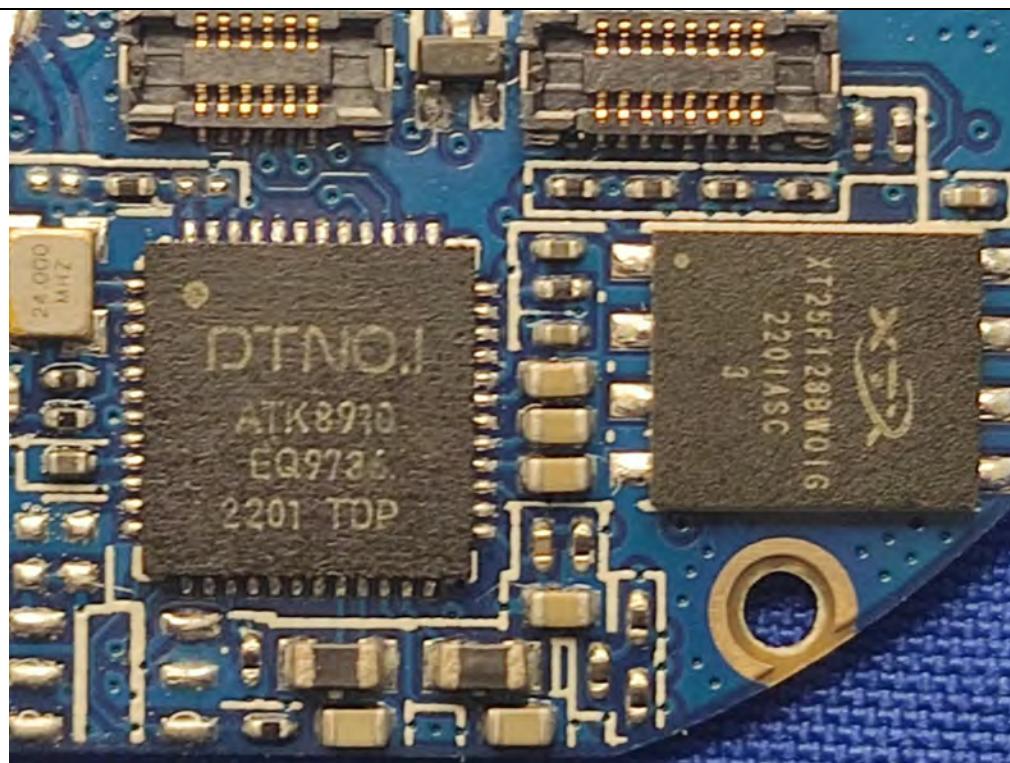


Photo 10

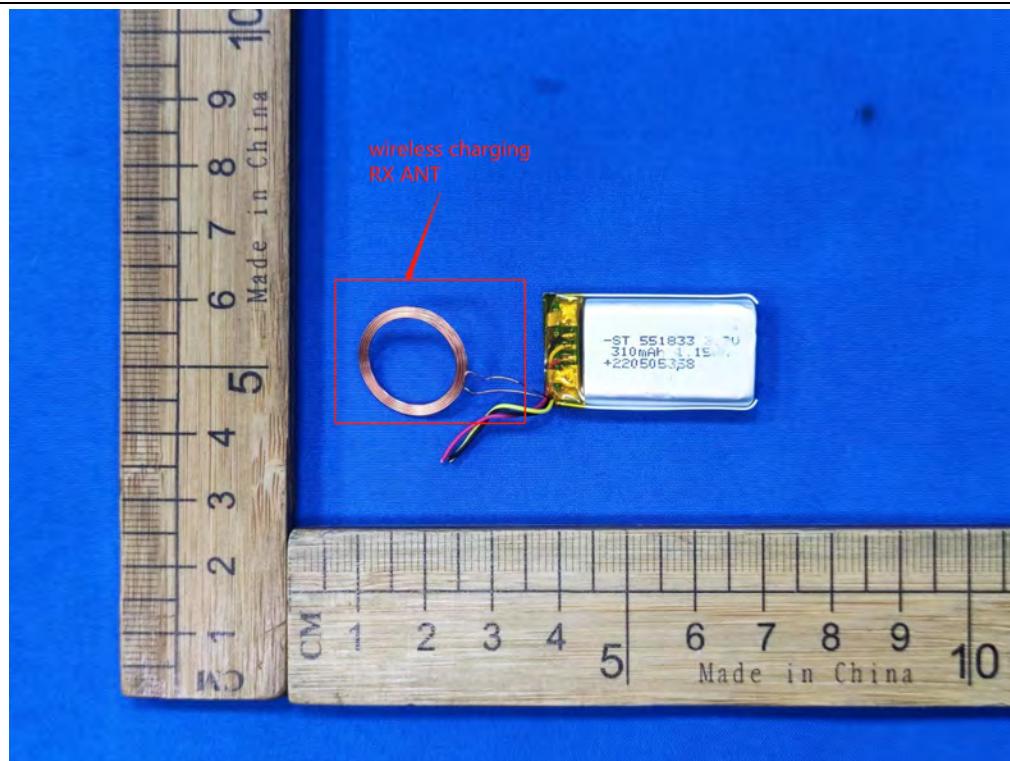


Photo 11



--THE END--