

SUBMITTED MEASURED DATA

<u>MEASUREMENT</u>	<u>EXHIBIT</u>	<u>NUMBER OF PAGES</u>
I RF Power Output Data	6A	2
II Audio Response & Low Pass Filter Response	6B 6C	3 2
III Modulation Limiting	6D	4
IV Occupied Bandwidth	6E	17
V Adjacent Channel Coupled Power Ratio	6F	3
VI Conducted Spurious Emissions	6G	17
VII Radiated Spurious Emissions	6H	14
VIII 1559-1610 Radiated Spurious	6I	3
IX Frequency Stability		
A. Temperature	6J-1	1
B. Supply Voltage	6J-1	1
X Transient Frequency Behavior	6K	2

**EXHIBIT 6A**

**RF Conducted Power Output Data** -- Pursuant 47 CFR 2.1046(a), 2.1033(c)(6), 2.1033(c)(7) and 2.1033(c)(8)

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q403).

**Frequency =136.0125 MHz:**

Output RF power	60.0 Watts
DC Voltage	13.6 Volts
DC Current	9.378 A

**Frequency=136.0125 MHz:**

Output RF power	11 Watts
DC Voltage	13.6Volts
DC Current	4.34 A

**Frequency =155.0125 MHz:**

Output RF power	60.1 Watts
DC Voltage	13.6 Volts
DC Current	7.90 A

**Frequency= 155.0125 MHz:**

Output RF power	11.02 Watts
DC Voltage	13.6 Volts
DC Current	3.66 A

**Frequency =173.9875 MHz:**

Output RF power	60.4 Watts
DC Voltage	13.6 Volts
DC Current	8.70 A

**Frequency= 173.9875 MHz:**

Output RF power	11.01 Watts
DC Voltage	13.6 Volts
DC Current	4.01 A

**Frequency =764.0125 MHz:**

Output RF power	2 Watts
DC Voltage	13.6 Volts
DC Current	1.9 A

**Frequency =764.0875 MHz:**

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.4 A

Output RF power	18 Watts
DC Voltage	13.6 Volts
DC Current	5.35 A

Output RF power	36 Watts
DC Voltage	13.6 Volts
DC Current	7.94 A

**Frequency =823.9875 MHz:**

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.52 A

Output RF power	21 Watts
DC Voltage	13.6 Volts
DC Current	5.9 A

Output RF power	42 Watts
DC Voltage	13.6 Volts
DC Current	8.95 A

**Frequency =868.9875 MHz:**

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.22 A

Output RF power	21 Watts
DC Voltage	13.6 Volts
DC Current	5.15 A

Output RF power	42 Watts
DC Voltage	13.6 Volts
DC Current	7.8 A

EXHIBIT 6B

Transmit Audio Frequency Response - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

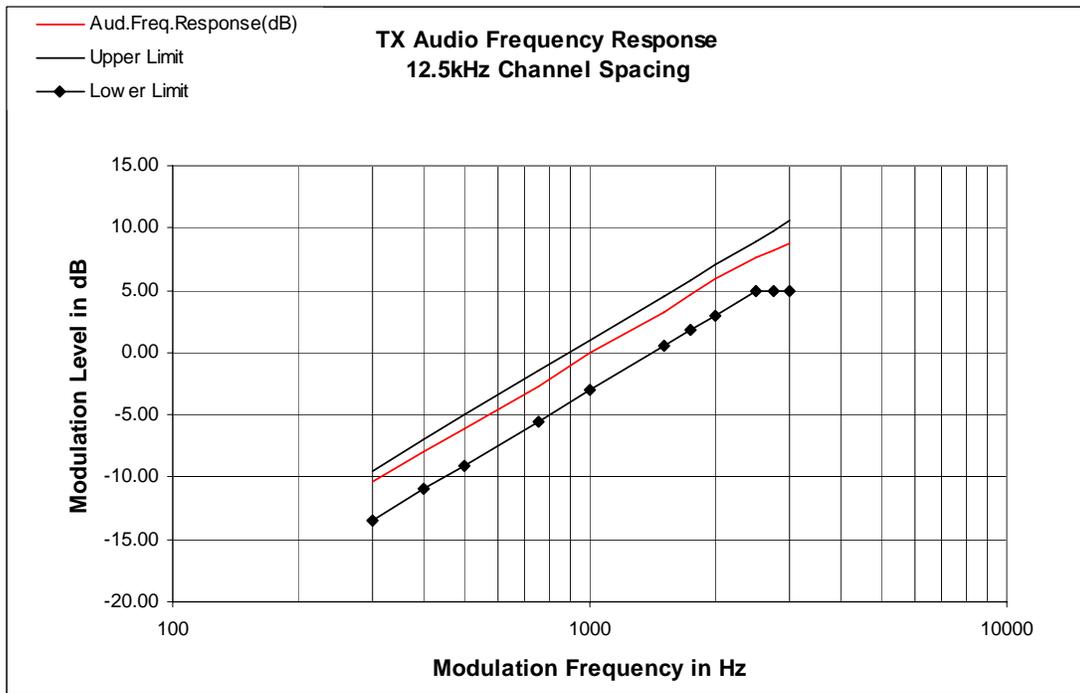


Figure 6B-1: 12.5 KHz Channel Spacing, 155.0125 MHz, Transmit Audio Frequency Response

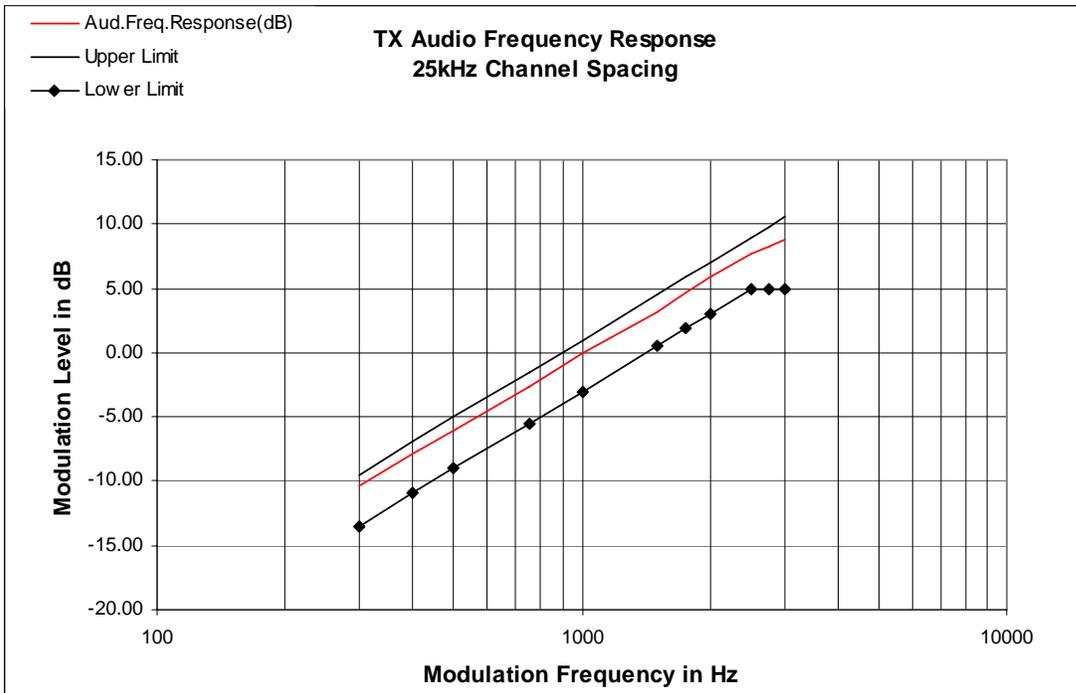


Figure 6B-2: 25 KHz Channel Spacing, 155.0125 MHz, Transmit Audio Frequency Response

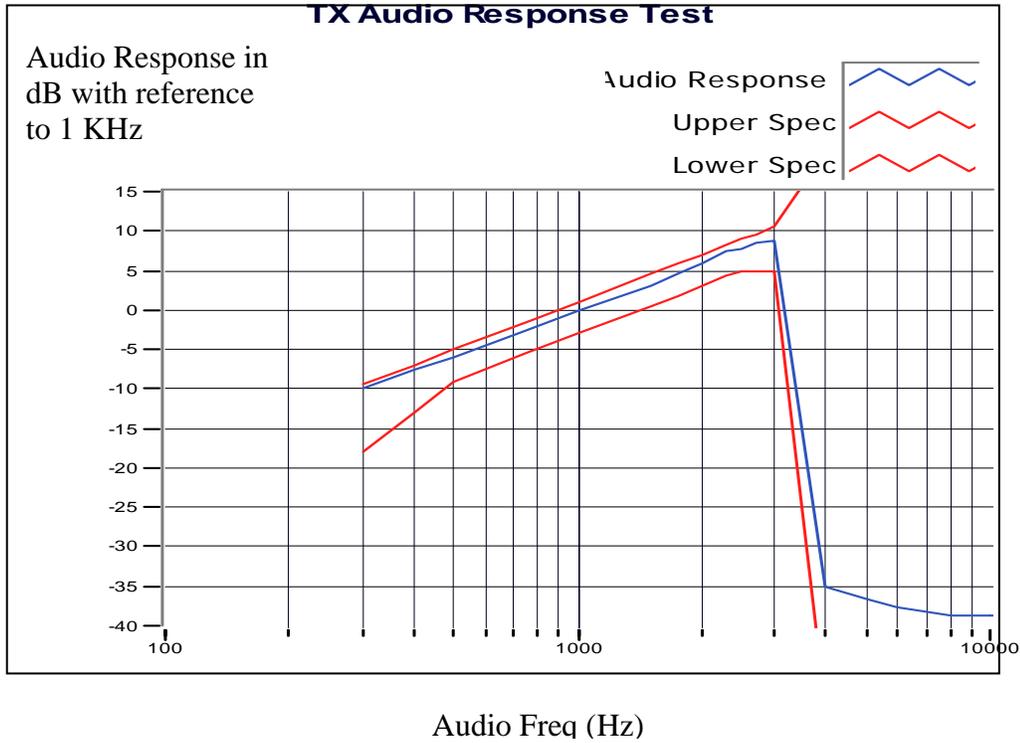


Figure 6B-3: 12.5 KHz Channel Spacing, 860.0125MHz, Transmit Audio Frequency Response


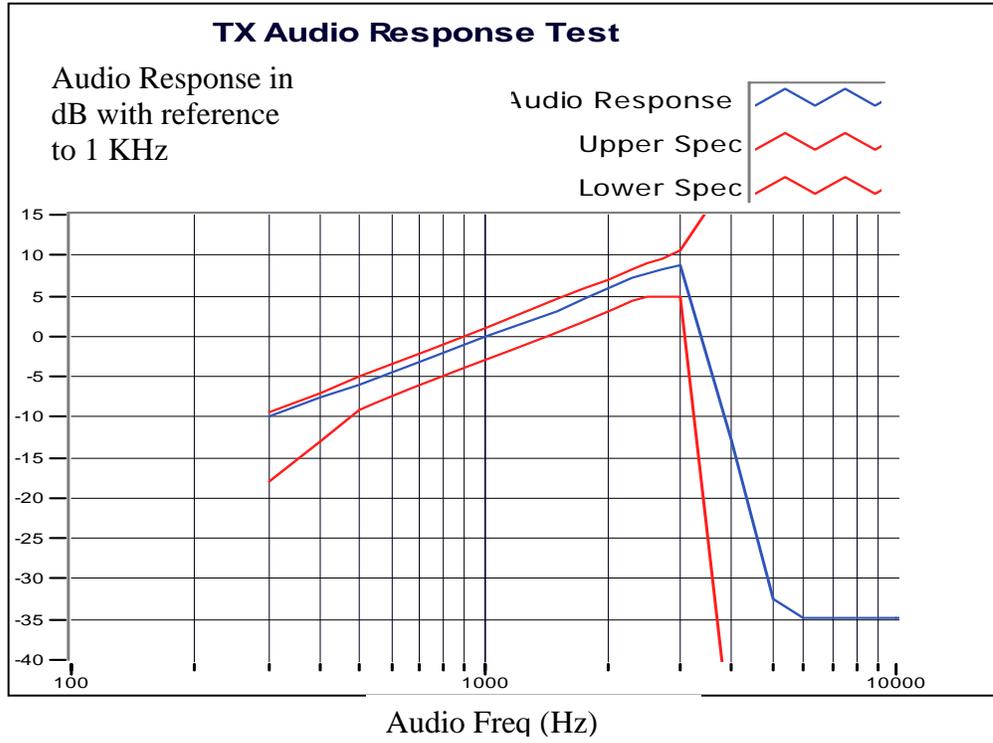



Figure 6B-4: 25 KHz Channel Spacing, 860.0125MHz, Transmit Audio Frequency Response

**EXHIBIT 6C**

**Transmit Audio Post Limiter Low Pass Filter Response - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)**

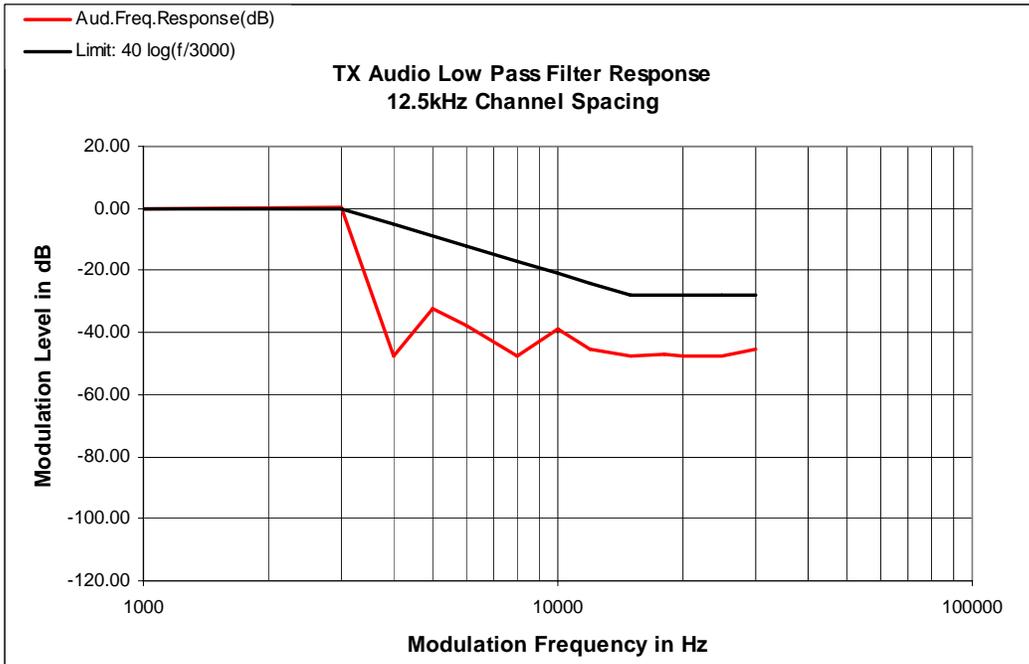

**Figure 6C-1:** 12.5 KHz Channel Spacing, 155.025 MHz, Transmit Audio Low Pass Filter Response

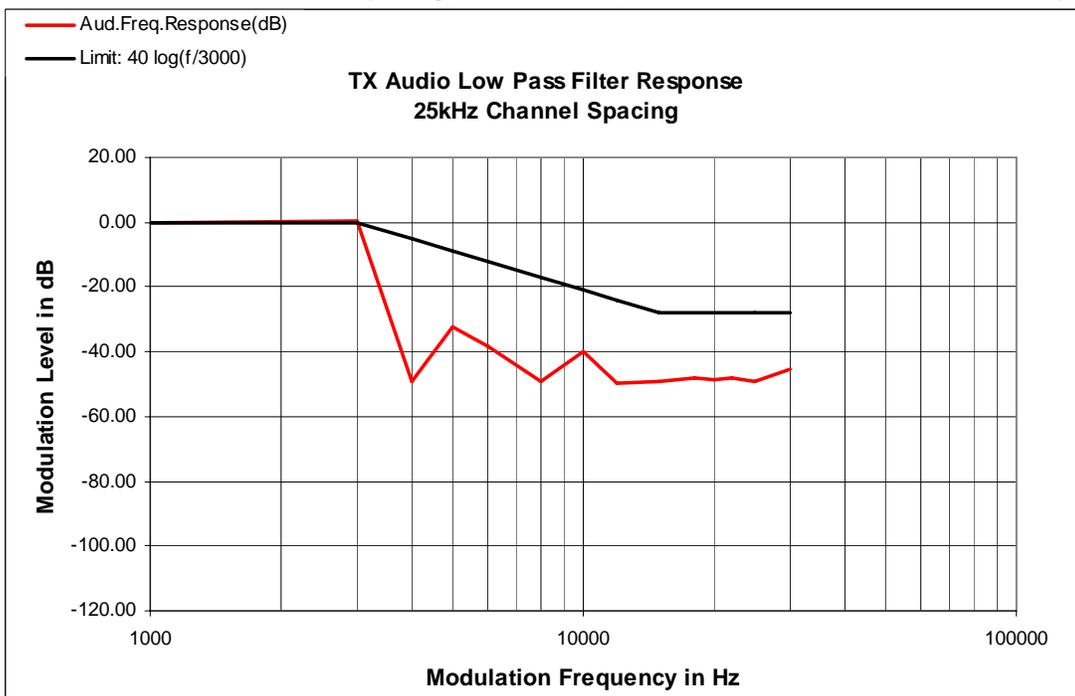

**Figure 6C-2:** 25 KHz Channel Spacing, 155.025 MHz, Transmit Audio Low Pass Filter Response

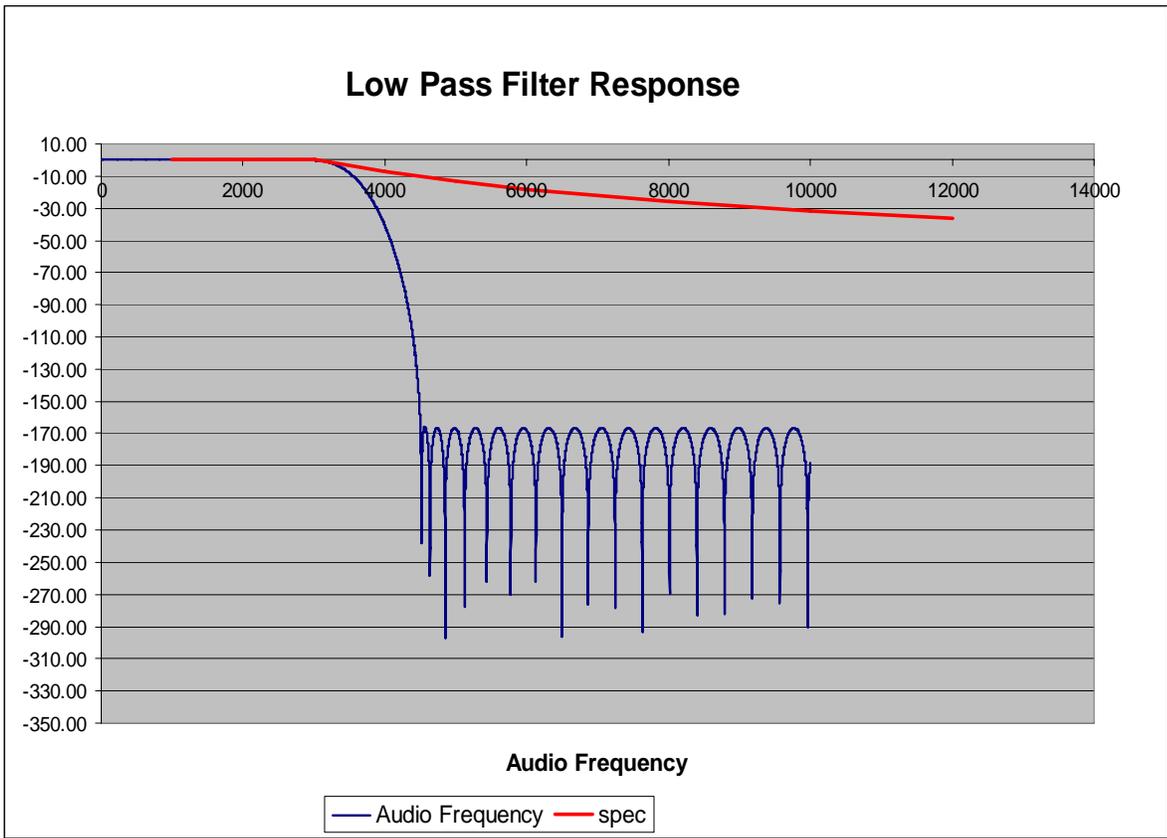


Figure 6C-3: 156.0125MHz, Transmit Audio Low Pass Filter Response

EXHIBIT 6D

Modulation Limiting Characteristics - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

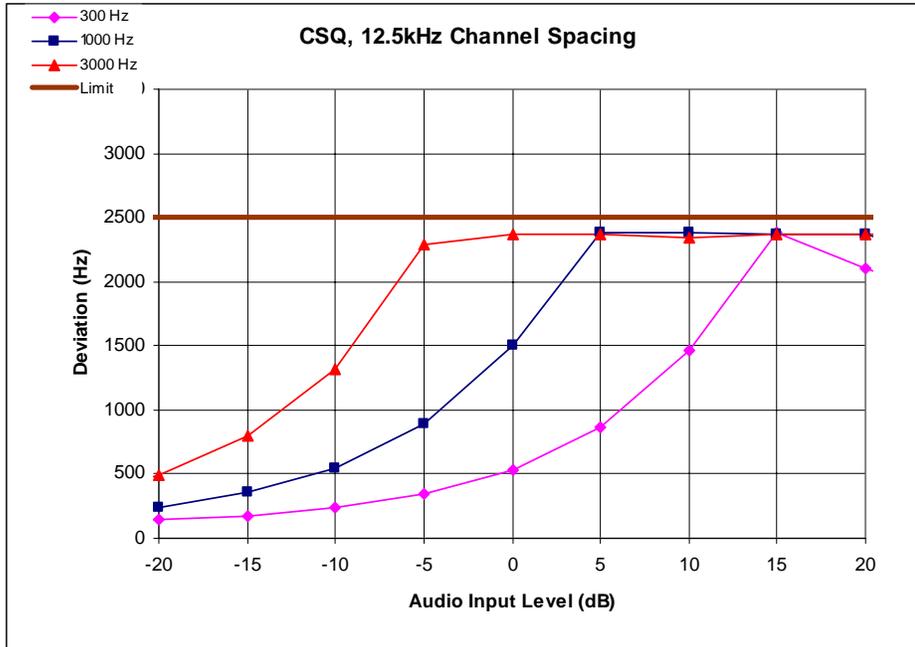


Figure 6D-1: 12.5 KHz Channel Spacing, 155.0125 MHz, Carrier Squelch (CSQ) Mode

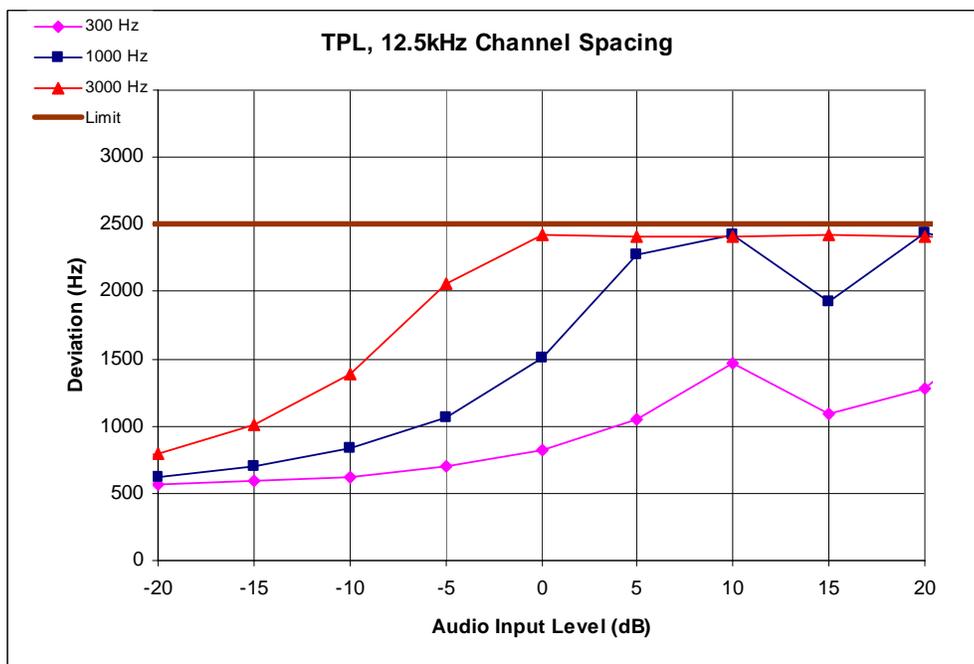


Figure 6D-2: 12.5 KHz Channel Spacing, 155.025 MHz, Tone Private Line (TPL) Mode

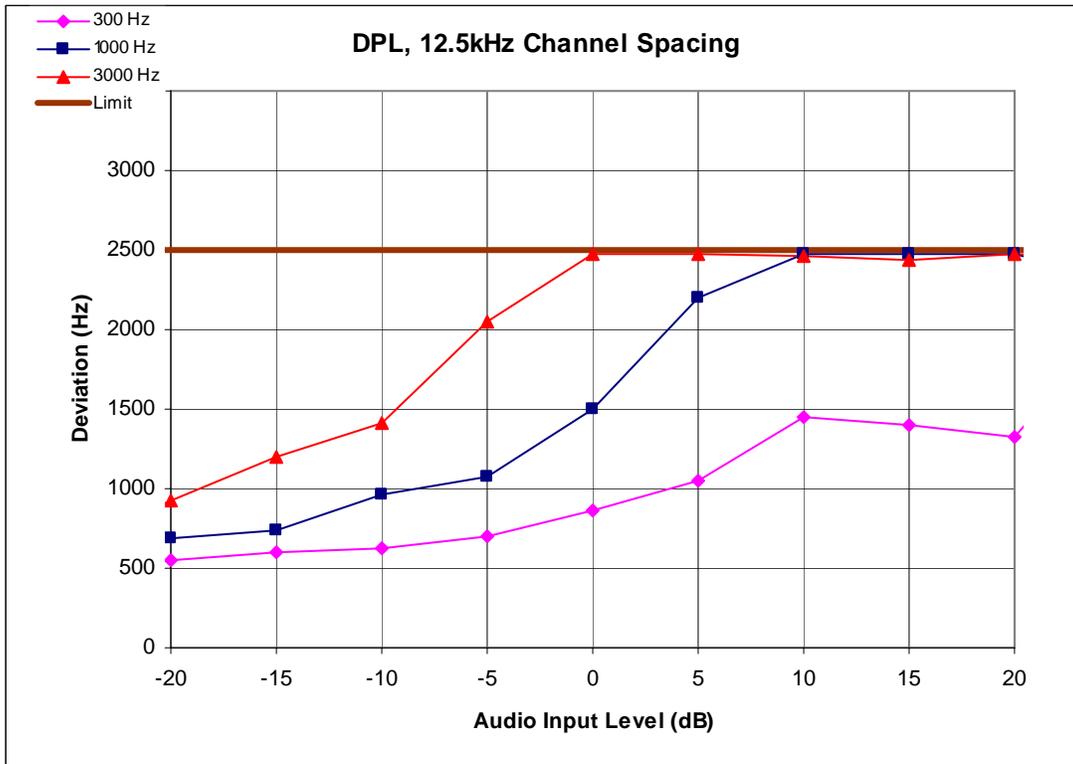


Figure 6D-3: 12.5 KHz Channel Spacing, 155.025 MHz, Digital Private Line (DPL) Mode

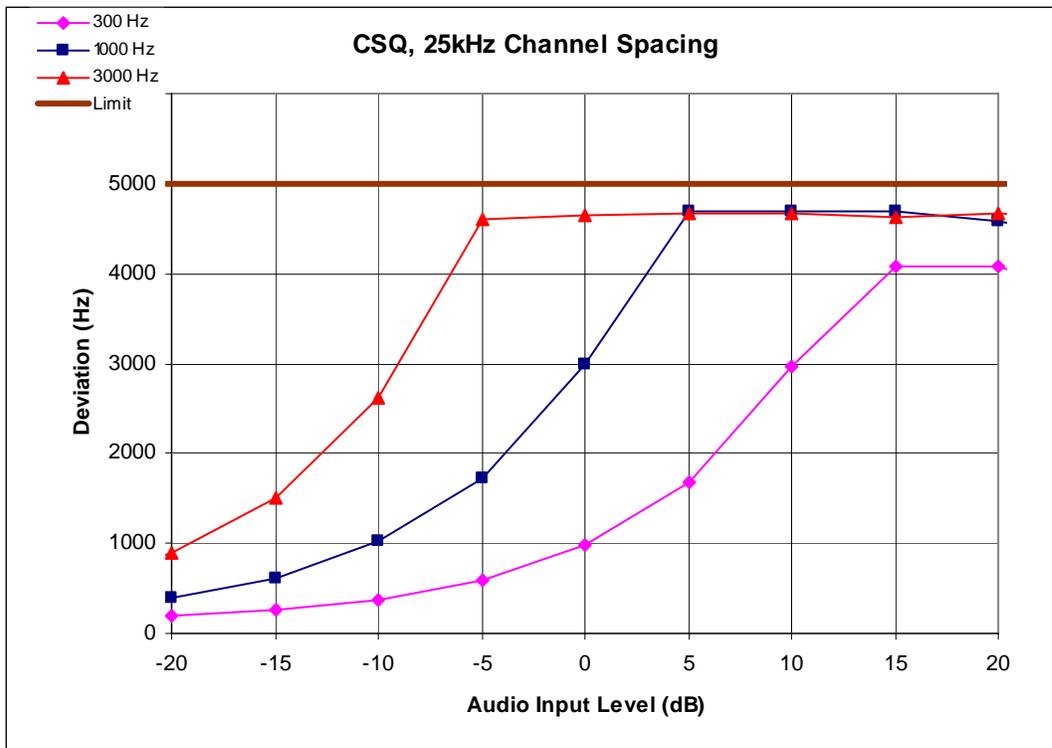


Figure 6D-4: 25 KHz Channel Spacing, 155.025 MHz, Carrier Squelch (CSQ) Mode

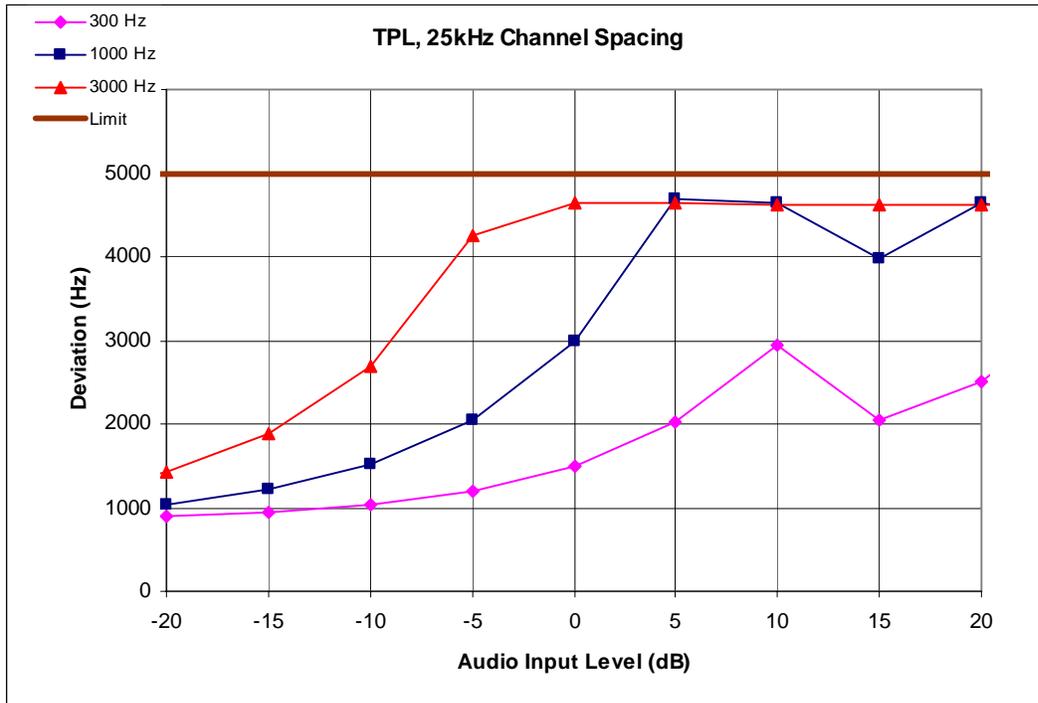


Figure 6D-5: 25 KHz Channel Spacing, 155.025 MHz, Tone Private Line (TPL) Mode

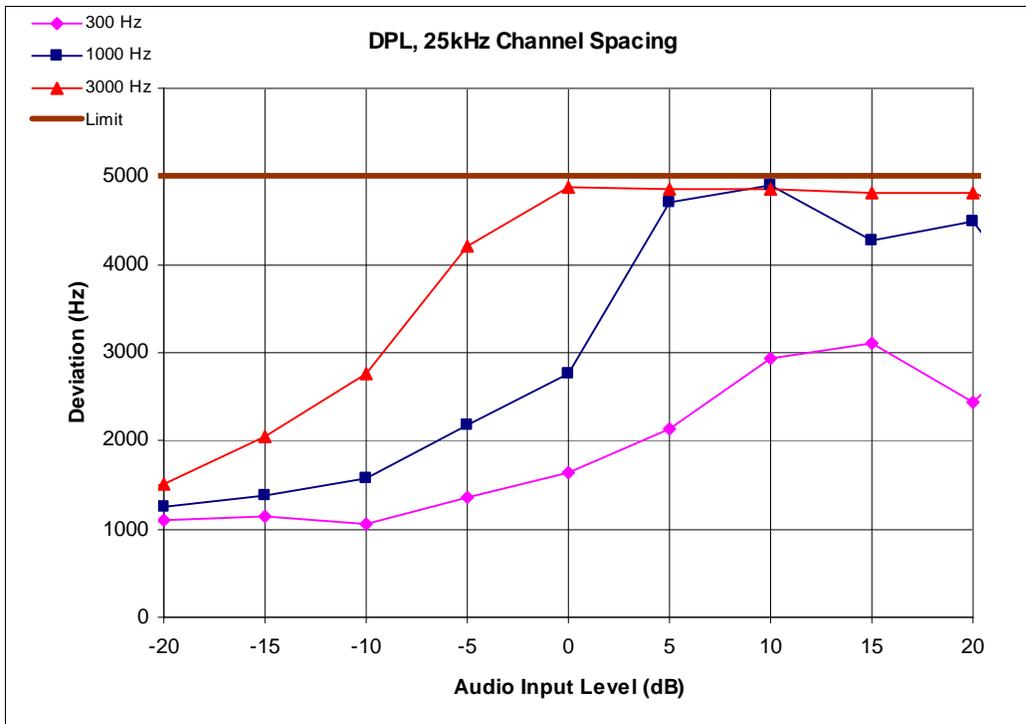


Figure 6D-6: 25 KHz Channel Spacing, 155.025 MHz, Digital Private Line (DPL) Mode

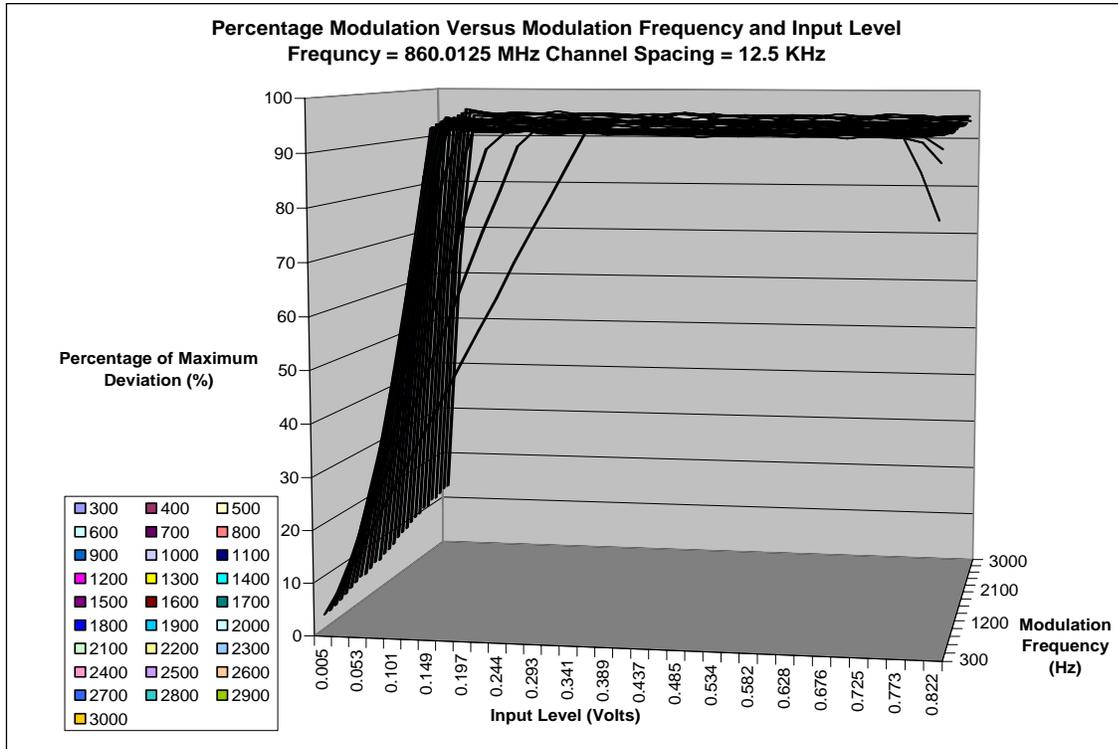


Figure 6D-7: The Percentage of Max. Deviation on the “Z” axis is referenced to 2.5 kHz for 12.5 kHz bandwidth

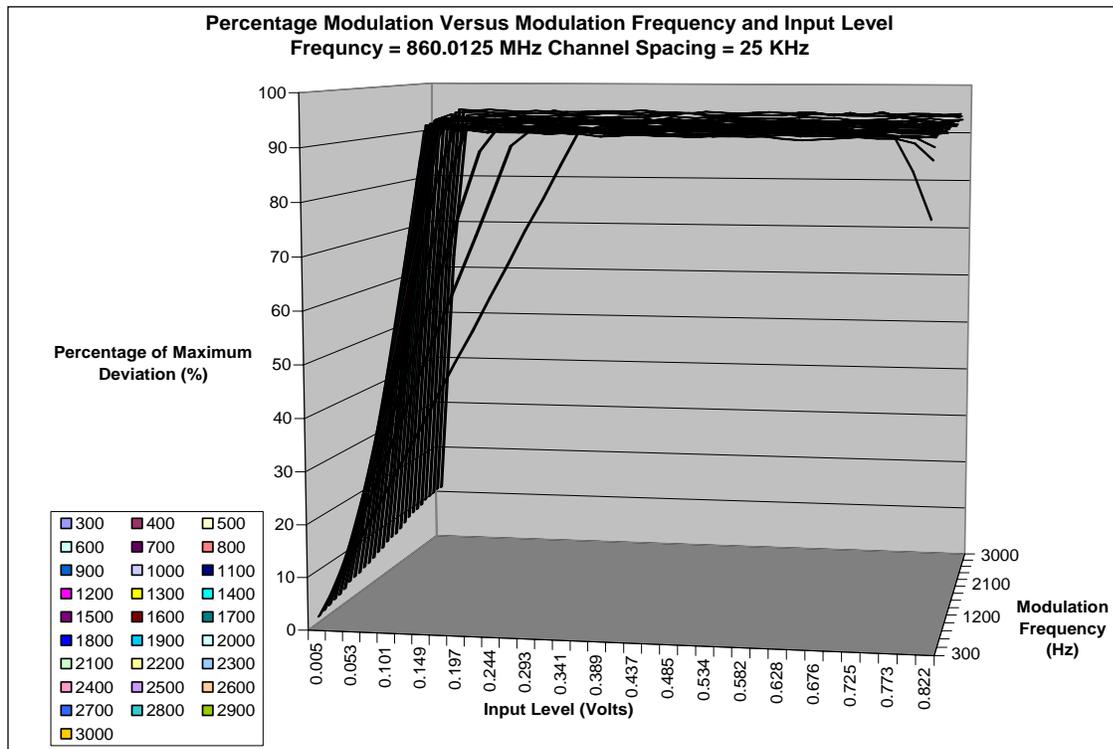


Figure 6D-8: The Percentage of Max. Deviation on the “Z” axis is referenced to 5.0 kHz for 25 kHz bandwidth

**EXHIBIT 6E**  
**Occupied Bandwidth Data**

**BANDWIDTH CALCULATIONS:**

Carson's Rule for FM modulation is utilized to compute the bandwidth shown in the FCC emission designator.

Carson's Rule is:  $BW = 2 * (M + D)$  where: BW = Bandwidth  
M= Maximum modulating frequency  
D = Deviation

Shown below are the calculations required for FCC ID: AZ489FT7036.

**EXHIBIT 6E-1**

Standard Audio Modulation (12.5 KHz Channelization, Analog Voice):

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \Rightarrow 11\text{K0}$   
F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

**EXHIBIT 6E-2**

Standard Audio Modulation (25 kHz Channelization, Analog Voice):

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} \Rightarrow 16\text{K0}$   
F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 KHz channelization analog voice is 16K0F3E.

**EXHIBIT 6E-3**

Digital (12.5 kHz Channelization, Digital Data):

Emission Designator 8K10F1D

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X KHz, in this case, 8.10 KHz Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1D portion of the designator indicates digital data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 8K10F1D.

EXHIBIT 6E-4

Digital (12.5 kHz Channelization, Digital Voice):  
Emission Designator 8K10F1E

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 12.5 KHz channelization digital voice is 8K10F1E.

EXHIBIT 6E-5

Digital (12.5 KHz Channelization, Digital TDMA):  
Emission Designator 8K10F1W

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1W portion of the designator indicates digital TDMA.

Therefore, the entire designator for 12.5 kHz channelization digital TDMA is 8K10F1W.

EXHIBIT 6E-6

Digital Modulation (20 KHz Channelization, Digital Voice with encryption):  
Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6 KHz with a 4 KHz deviation.

$BW = 2(M+D) = 2*(6 \text{ KHz} + 4 \text{ KHz}) = 20 \text{ KHz} \Rightarrow 20K0$   
F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20 KHz channelization analog voice is 20K0F1E.

EXHIBIT 6E-7

Securenet Mode (20.0 KHz Channelization, Analog Voice with Encryption):  
Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6.0 KHz with a 4.0 KHz deviation.

$BW = 2(M+D) = 2*(6.0 \text{ KHz} + 4.0 \text{ KHz}) = 20 \text{ KHz} \Rightarrow 20K0$   
F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20.0 KHz channelization securenet mode (analog voice with encryption) is 20K0F1E.

EXHIBIT 6E

Note: The 90.203(j) efficiency standard for “F1D” emission is met by sending 2 bits at a time, at a rate of 4800 symbols/second. This yields 9600 bits/second, which is achieved using the modulation technique described in the note below. Modulation results from one of the digital 4-level standard symbol patterns applied to the modulation at a rate of 9600 bits/second. The modulation technique is 4-level FM. The information bits are commonly represented by a symbol that corresponds to one of 4 levels of FM deviation according to the following table.

<u>Information Bits</u>	<u>Symbol</u>	<u>C4FM Deviation</u>
01	+3	+1.8 KHz
00	+1	+0.6 KHz
10	-1	-0.6 KHz
11	-3	-1.8 KHz

For example, an 8-bit binary pattern of 0010 1101 would be sent as symbols +1, -1, -3, +3, which would cause a modulation signal (Frequency-Shift-Keyed) of +1.8 KHz, -600 Hz, -1.8 KHz, and +1.8 KHz. This results in 9600 bits/second of information being sent on a 12.5 KHz channel, which is the equivalent of 4800 bits/second per 6.25 KHz.

Note: The “F1D”, “F1E” and “F1W” signal parameters are described as follows: The modulation is 4-level FSK with +/-600 Hz and +/-1.8 KHz shifting (+/-600 Hz and +/-1.8 KHz are the 4 distinct levels of signals). The digital voice test pattern is created by a 2500 Hz sine wave modulated at a level that is 16 dB above that required to produce 50% deviation at the radio output. The digital data test signal is generated by an internally generated pseudo random test pattern based on ITU-T 0.153 (formally CCITT V.52).

Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

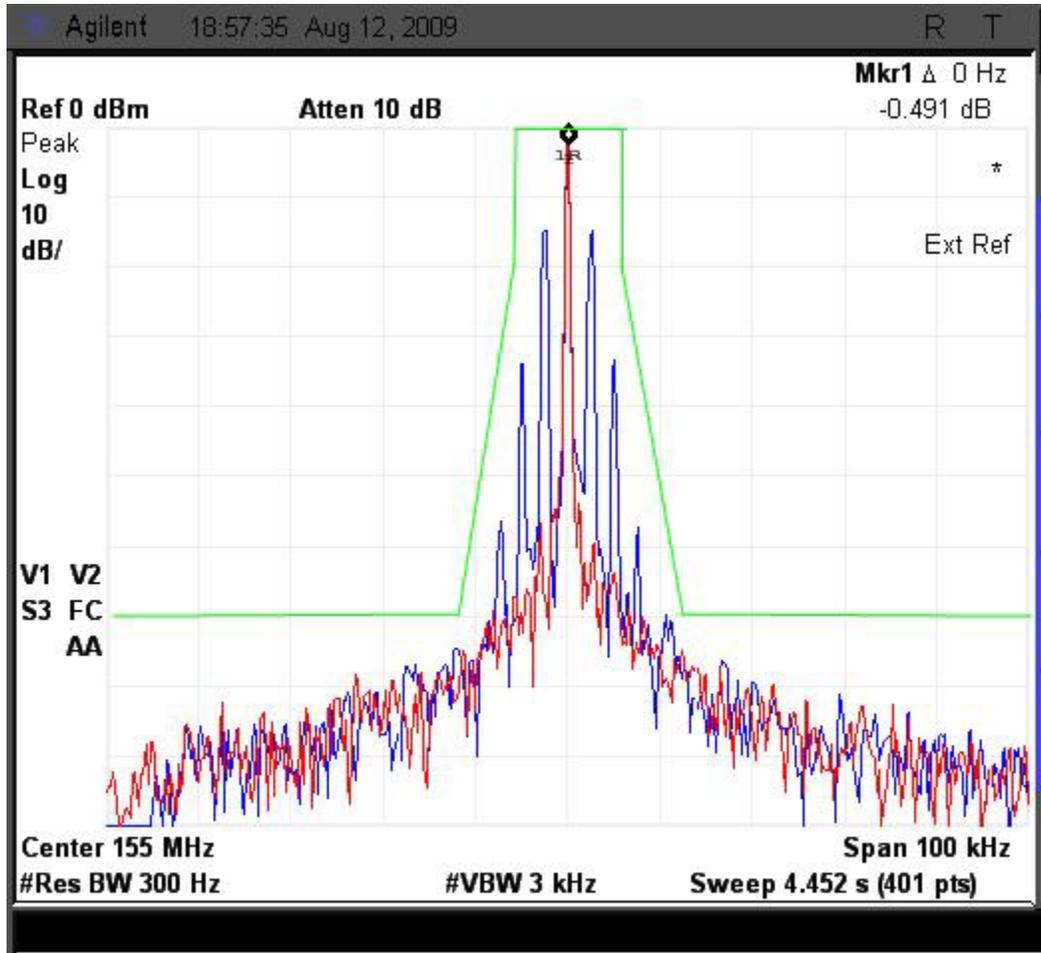


Figure 6E-1: 12.5 KHz Channel Spacing, 155.0125 MHz, Analog Voice, 11K0F3E

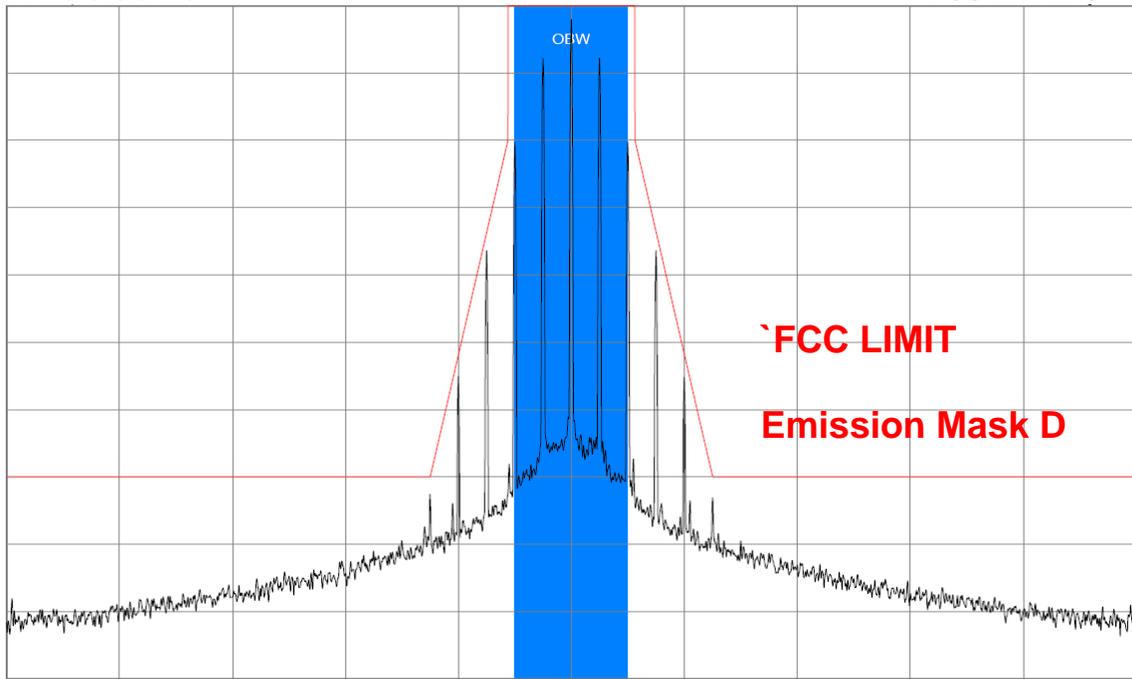


Figure 6E-2: 12.5 KHz Channel Spacing, 860.0125 MHz, Analog Voice, 11K0F3E

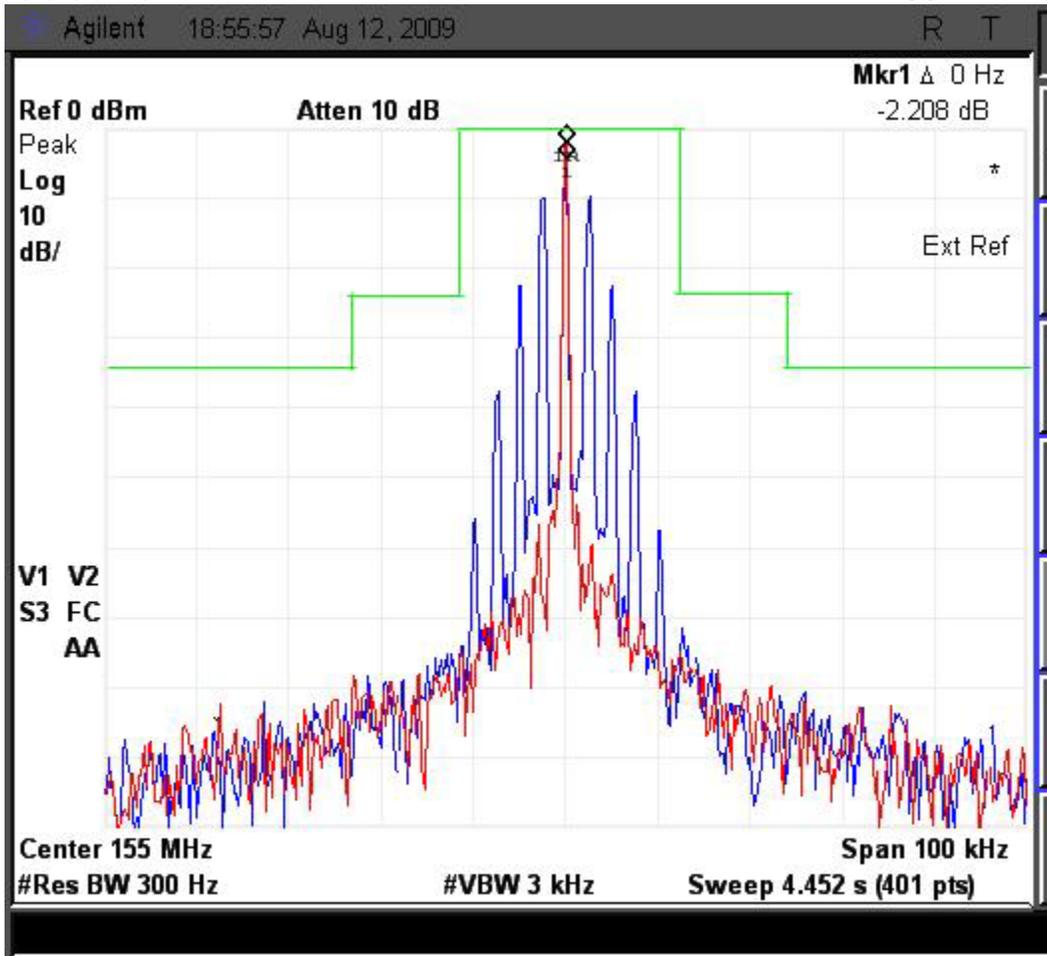


Figure 6E-3: 25KHz Channel Spacing, 155.0125 MHz, Analog Voice, Mask B 16K0F3E

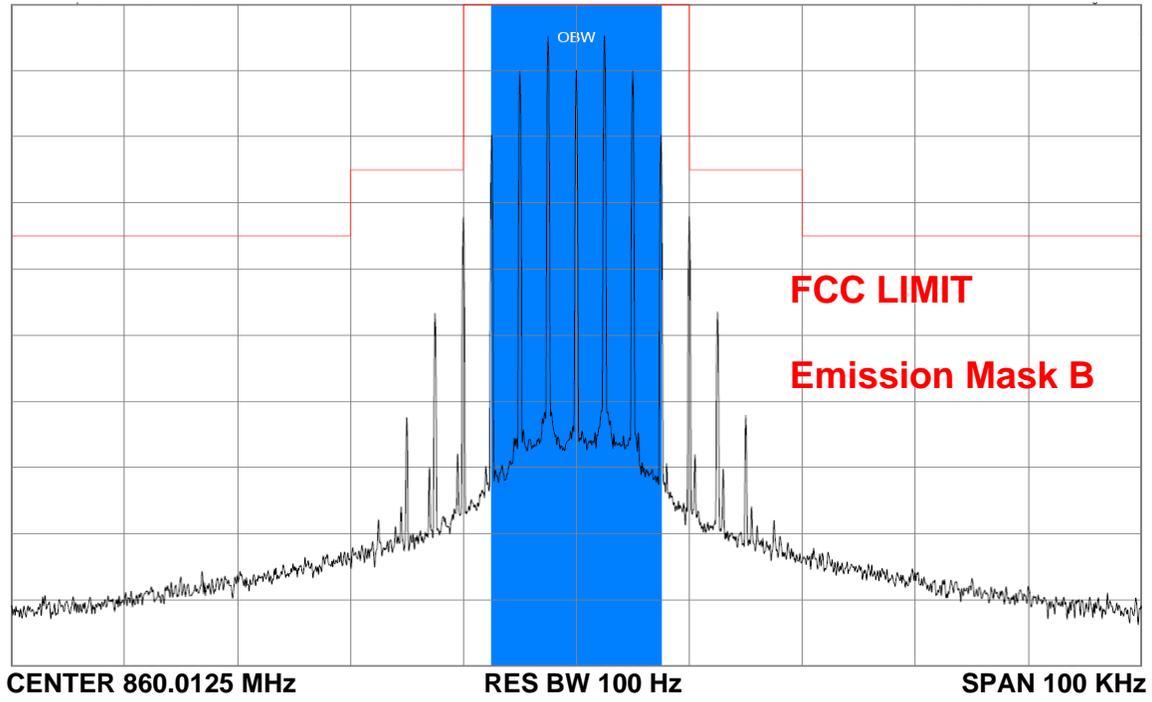


Figure 6E-4: 12.5 KHz Channel Spacing, 860.0125 MHz, Analog Voice, Mask B 16K0F3E


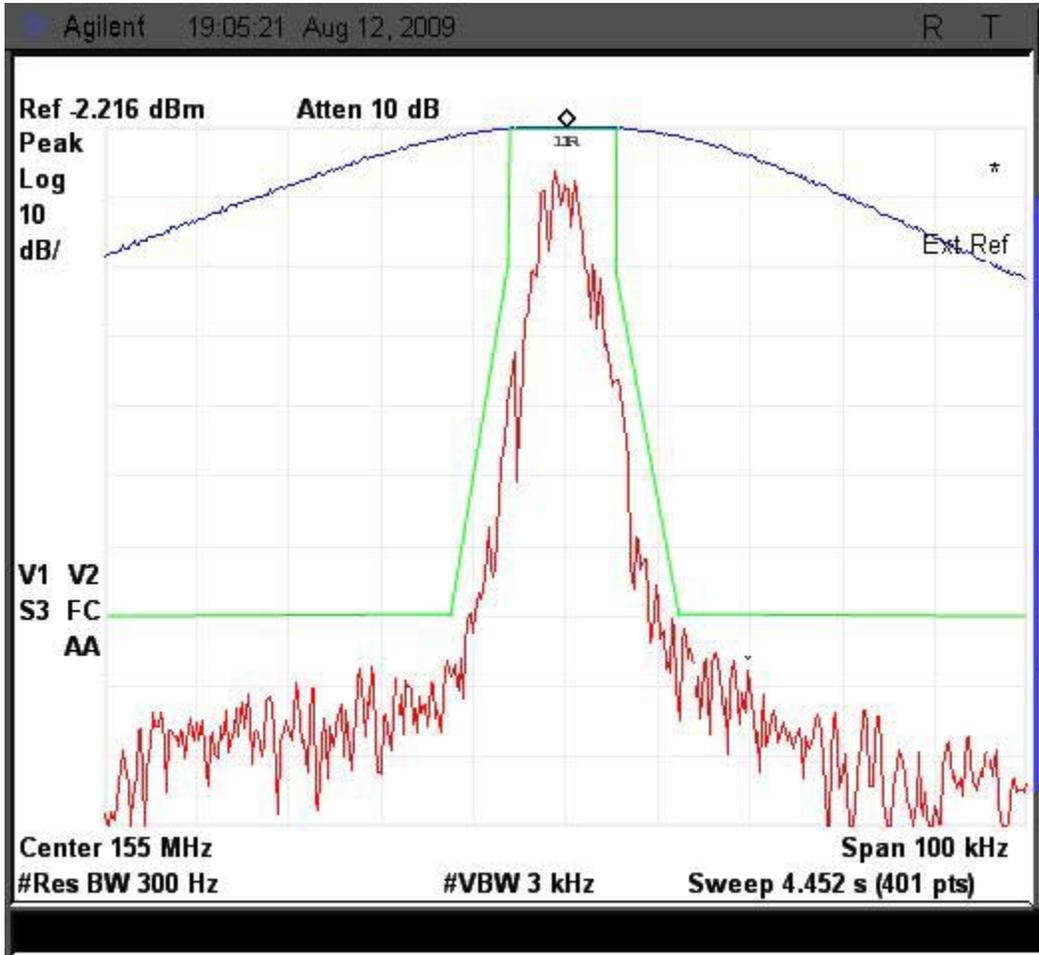


Figure 6E-5: 12.5 KHz Channel Spacing, 155.0125 MHz, Digital Data, Mask D 8K10F1D

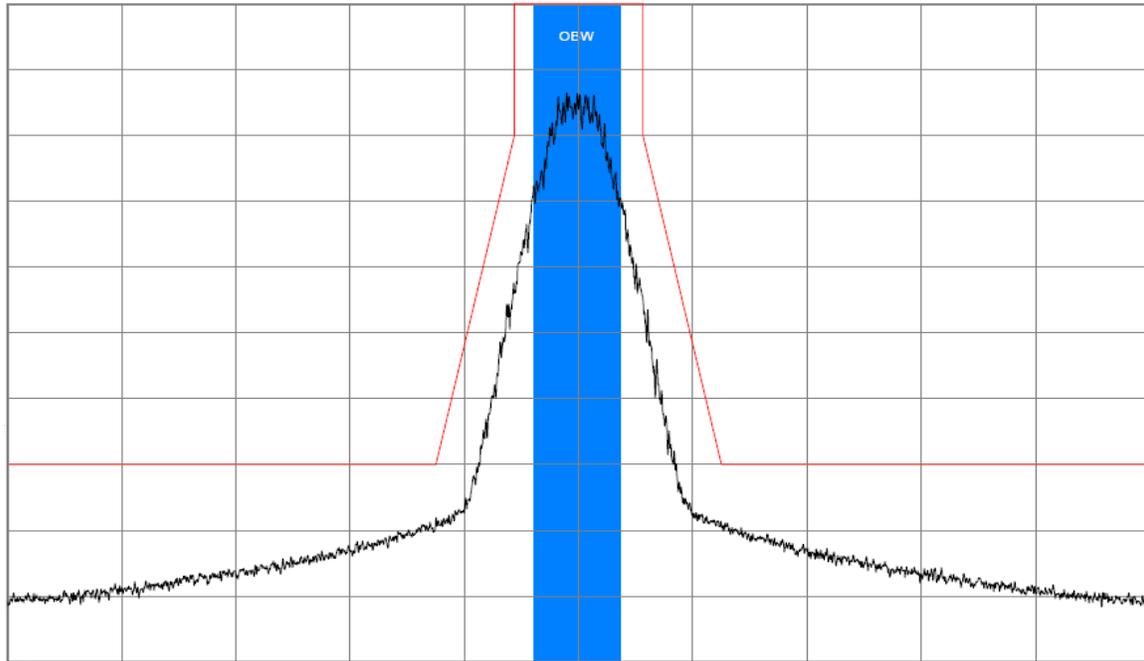

**CENTER 860.0125 MHz**      **RES BW 100 Hz**      **SPAN 100 KHz**  
Figure 6E-6: 12.5 KHz Channel Spacing, 860.0125 MHz, Digital Data, Mask D 8K10F1D

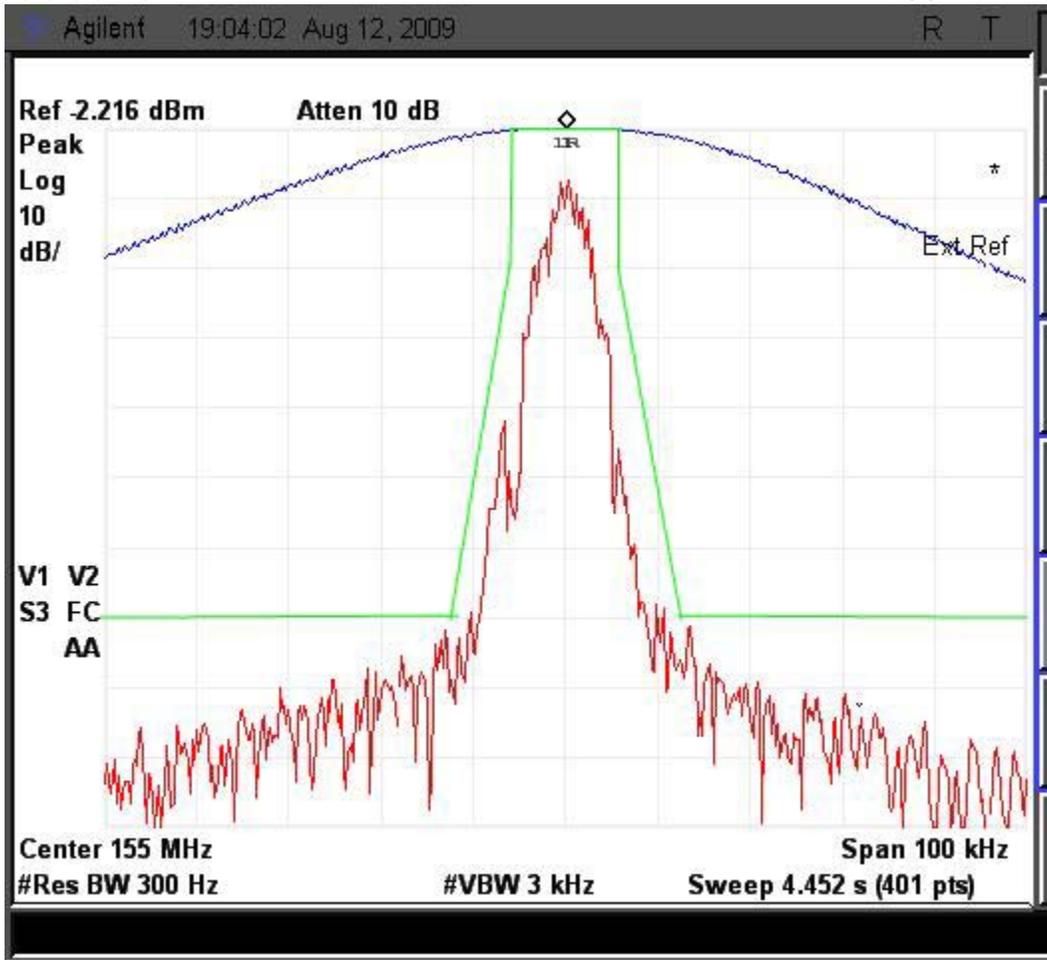


Figure 6E-7: 12.5 KHz Channel Spacing, 155.0125 MHz, Digital Voice, Mask D 8K10F1E

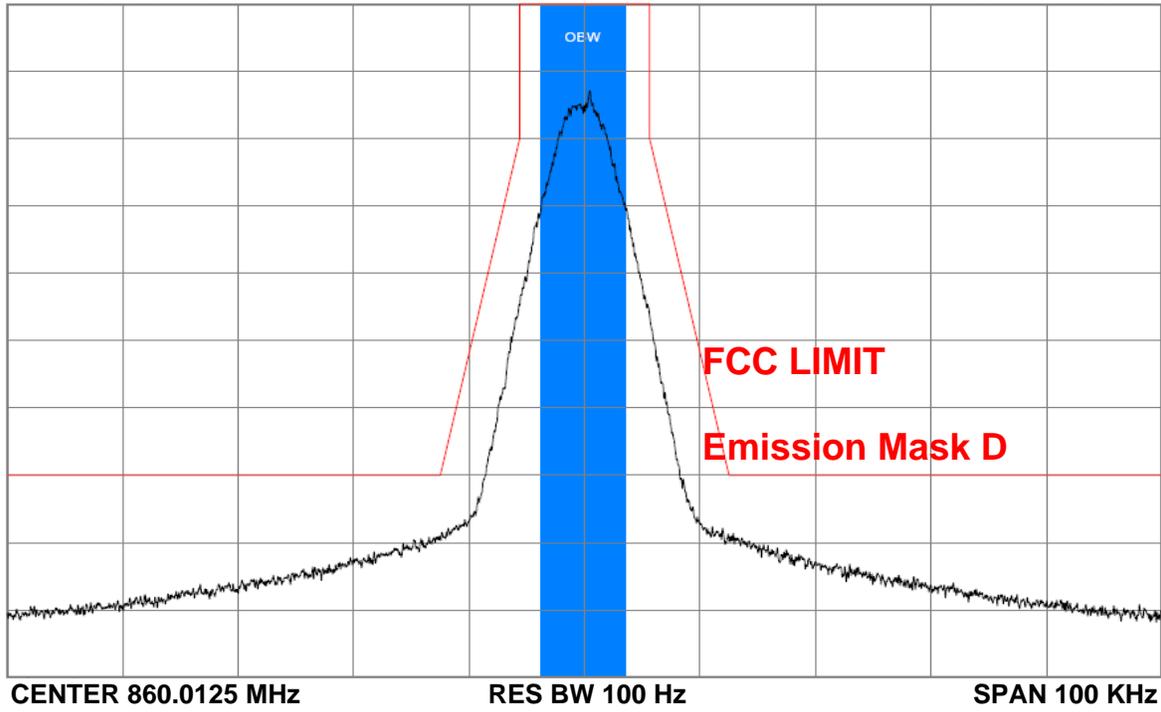


Figure 6E-8: 12.5 KHz Channel Spacing, 860.0125 MHz, Digital Voice, Mask D 8K10F1E

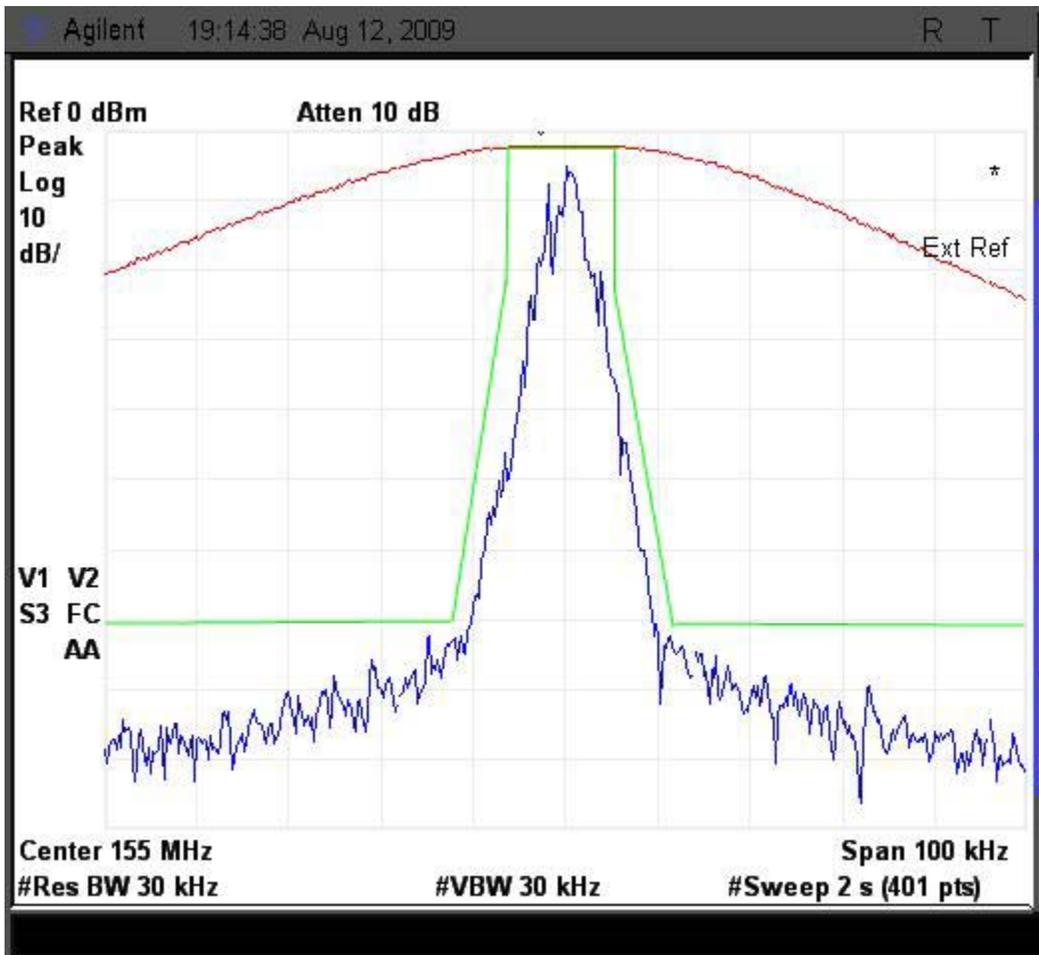


Figure 6E-9: 12.5 KHz Channel Spacing, 155.0125 MHz, Digital TDMA, MASK D 8K10F1W

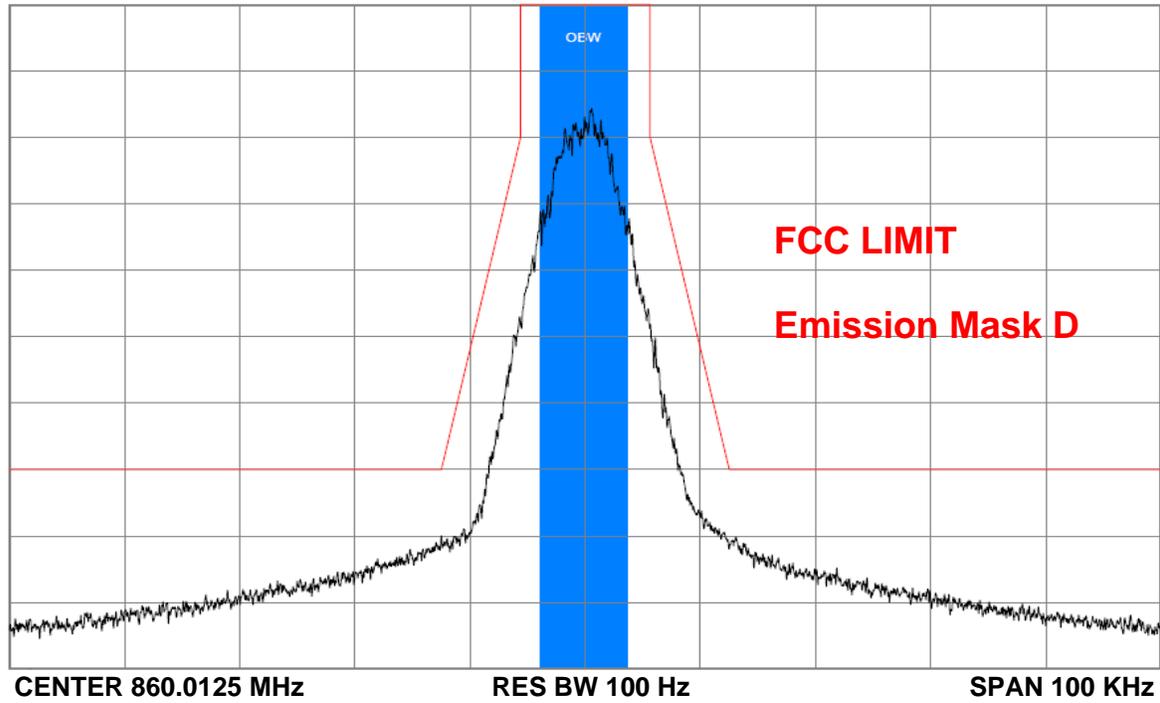


Figure 6E-10: 12.5 KHz Channel Spacing, 860.0125 MHz, Digital TDMA, MASK D 8K10F1W

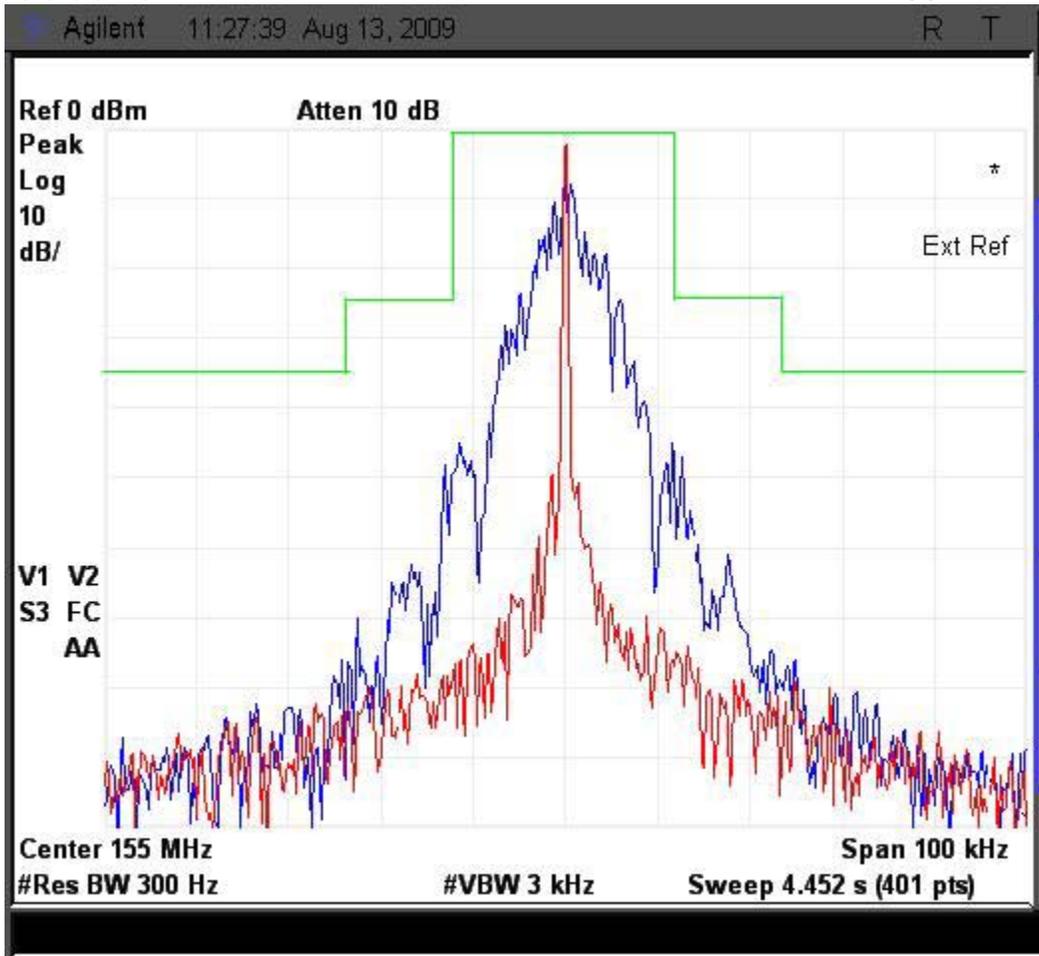


Figure 6E-11: 20 KHz Channel Spacing, 155.0125 MHz, Analog Voice Encryption Mask B 20K0F1E

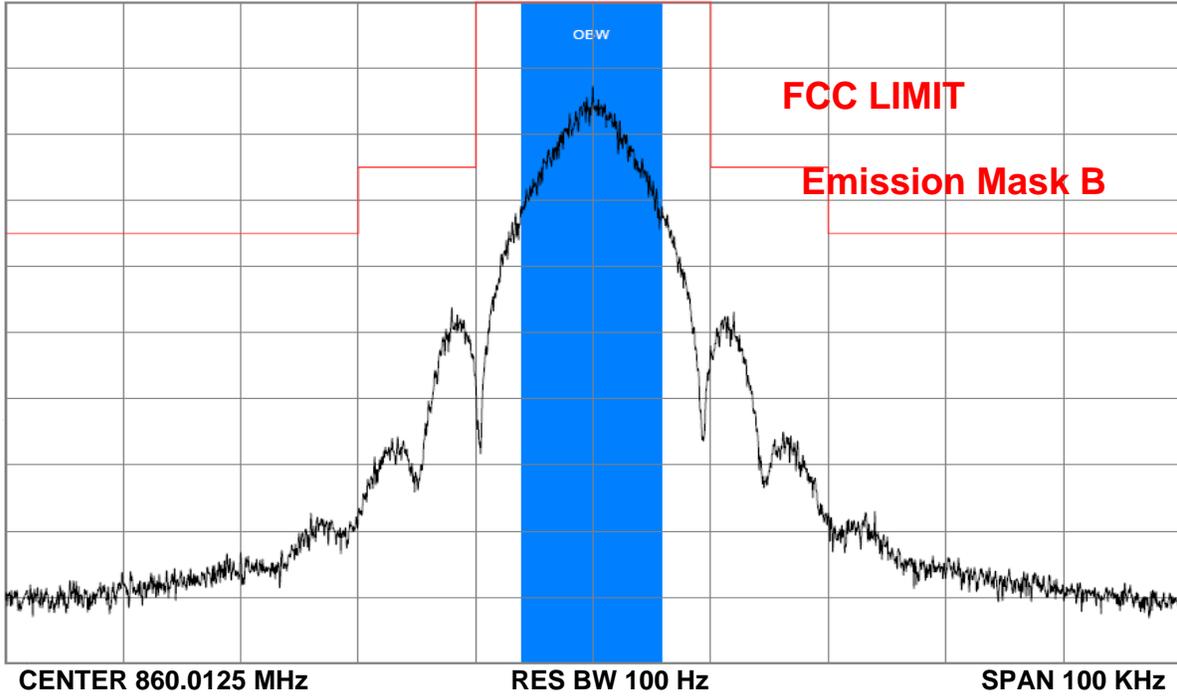


Figure 6E-12: 20 KHz Channel Spacing, 860.0125 MHz, Analog Voice Encryption Mask B 20K0F1E


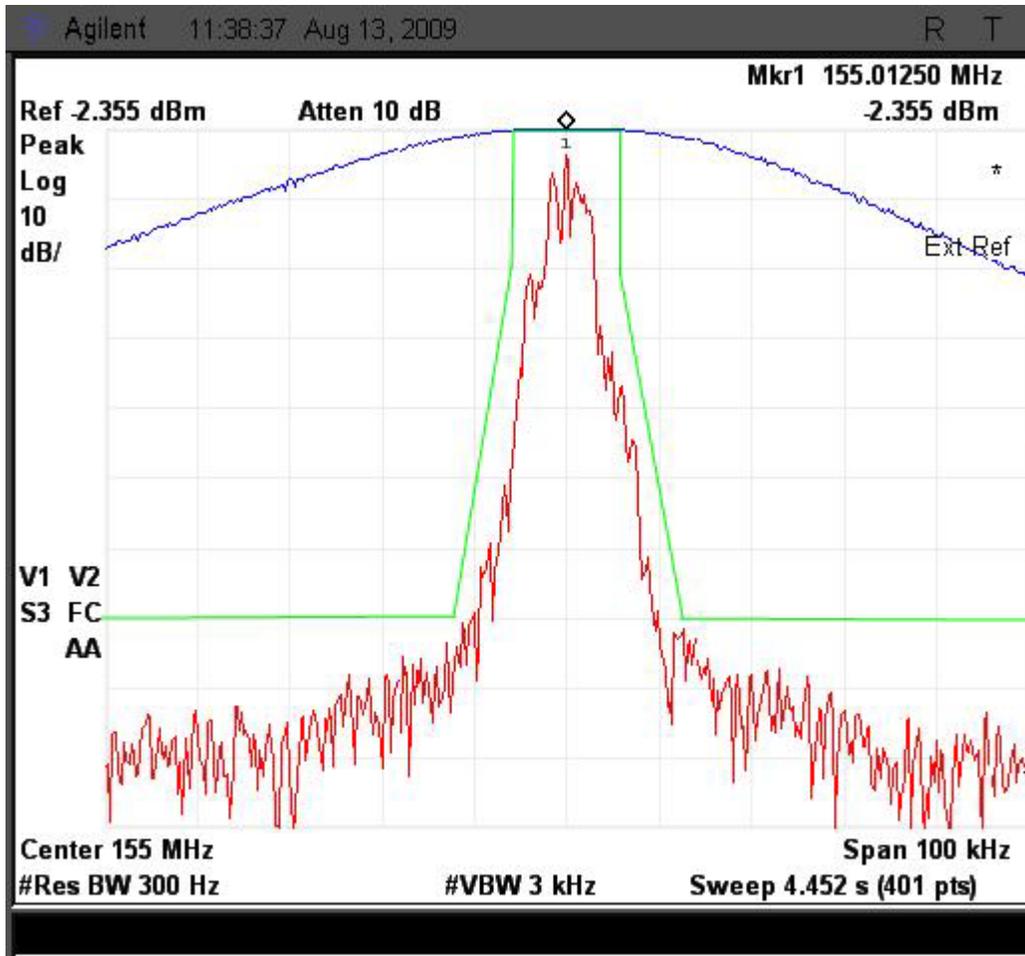


Figure 6F-13: 12.5 KHz Channel Spacing, 155.0125 MHz, Digital Voice Encryption Mask D 8K10F1E

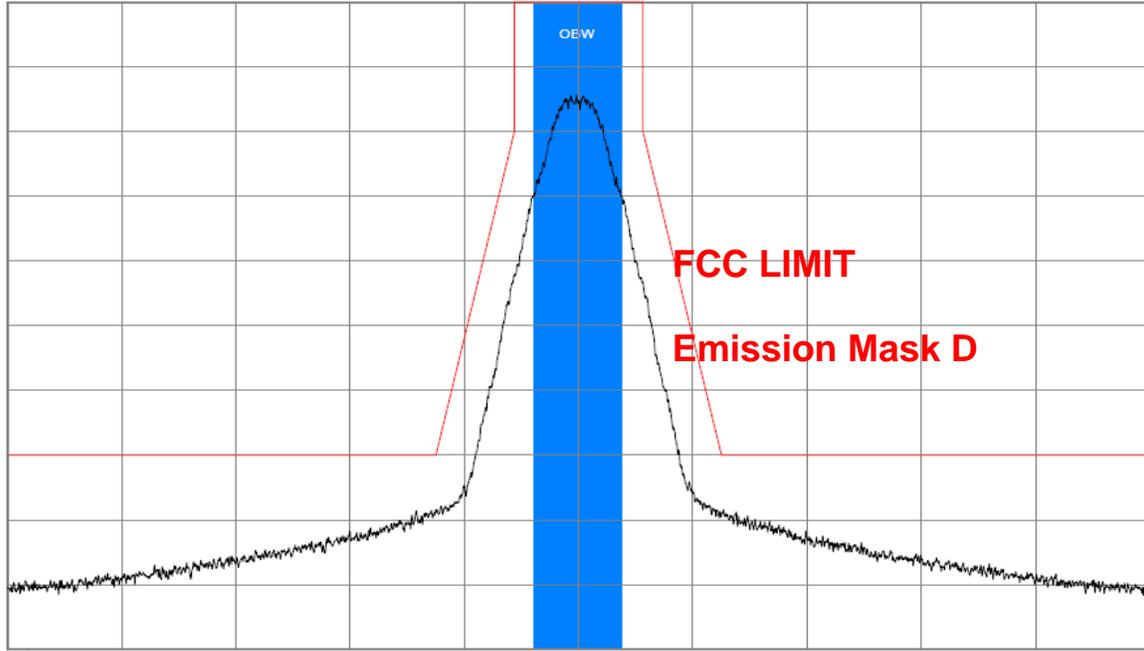

**CENTER 860.0125 MHz**      **RES BW 100 Hz**      **SPAN 100 KHz**  
Figure 6F-14: 12.5 KHz Channel Spacing, 860.0125 MHz, Digital Voice Encryption Mask D 8K10F1E

EXHIBIT 6F

Adjacent Channel Coupled Power Ratios

794.0875 MHz 25.0 KHz Channel Spacing ANALOG						
Emission Designator 16K0F3E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth (KHz)	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
15.625	6.250	100		-76.19	-76.14	-60
21.875	6.250	100		-78.87	-79.05	-60
37.500	25.000	300		-72.08	-72.06	-65
62.500	25.000	300		-76.66	-76.43	-65
87.500	25.000	300		-79.76	-79.81	-65
150.000	100.000	1100		-78.08	-78.21	-65
250.000	100.000	1100		-83.71	-83.66	-65
350.000	100.000	1100		-86.75	-86.69	-65
>400KHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 KHz Channel Spacing ANALOG						
Emission Designator 11K0F3E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth (KHz)	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-68.06	-67.78	-40
15.625	6.250	100		-75.53	-76.33	-60
21.875	6.250	100		-79.02	-78.79	-60
37.500	25.000	300		-71.76	-71.86	-65
62.500	25.000	300		-76.40	-76.62	-65
87.500	25.000	300		-79.70	-79.89	-65
150.000	100.000	1100		-78.45	-78.43	-65
250.000	100.000	1100		-83.84	-83.74	-65
350.000	100.000	1100		-86.68	-86.81	-65
>400KHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

EXHIBIT 6F-1

794.0875 MHz 12.5 KHz Channel Spacing DIGITAL DATA						
Emission Designator						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth (KHz)	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-42.56	-43.02	-40
15.625	6.250	100		-76.66	-76.81	-60
21.875	6.250	100		-78.97	-78.92	-60
37.500	25.000	300		-71.57	-71.73	-65
62.500	25.000	300		-76.03	-76.44	-65
87.500	25.000	300		-79.84	-79.90	-65
150.000	100.000	1100		-78.29	-78.39	-65
250.000	100.000	1100		-83.99	-83.91	-65
350.000	100.000	1100		-86.89	-86.96	-65
>400KHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 KHz Channel Spacing DIGITAL VOICE						
Emission Designator 8K10F1E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth (KHz)	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-42.25	-42.70	-40
15.625	6.250	100		-76.61	-76.41	-60
21.875	6.250	100		-78.78	-78.92	-60
37.500	25.000	300		-74.07	-73.85	-65
62.500	25.000	300		-76.52	-76.32	-65
87.500	25.000	300		-79.57	-79.83	-65
150.000	100.000	1100		-77.85	-77.69	-65
250.000	100.000	1100		-83.44	-83.29	-65
350.000	100.000	1100		-86.41	-86.37	-65
>400KHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

EXHIBIT 6F-2

794.0875 MHz 12.5 KHz Channel Spacing DIGITAL VOICE ENCRYPTION						
Emission Designator 8K10F1E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth (KHz)	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-41.52	-41.02	-40
15.625	6.250	100		-76.56	-76.28	-60
21.875	6.250	100		-78.62	-78.64	-60
37.500	25.000	300		-72.15	-72.45	-65
62.500	25.000	300		-76.66	-76.93	-65
87.500	25.000	300		-79.80	-79.98	-65
150.000	100.000	1100		-78.34	-78.25	-65
250.000	100.000	1100		-83.41	-83.27	-65
350.000	100.000	1100		-86.36	-86.23	-65
>400KHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing DIGITAL TDMA						
Emission Designator 8K10F1W						
Ref Power Level (dBm) = 46.2						
Offset (kHz)	Measurements Bandwidth (kHz)	Resolution Bandwidth (Hz)		ACP (dBc)		
				Lower	Upper	Spec (dBc)
9.375	6.250	100		-42.36	-42.84	-40
15.625	6.250	100		-69.90	-70.16	-60
21.875	6.250	100		-74.54	-75.81	-60
37.500	25.000	300		-71.74	-71.13	-65
62.500	25.000	300		-76.87	-76.38	-65
87.500	25.000	300		-79.93	-79.81	-65
150.000	100.000	1100		-76.64	-76.85	-65
250.000	100.000	1100		-82.38	-81.71	-65
350.000	100.000	1100		-84.24	-84.25	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

EXHIBIT 6F-3

EXHIBIT 6G

Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

Note: Red lines on graphs correspond to the FCC limit of -20 dBm for 12.5 KHz channel spacing and -13 dBm for 25 KHz channel spacing.

ANALOG MODE

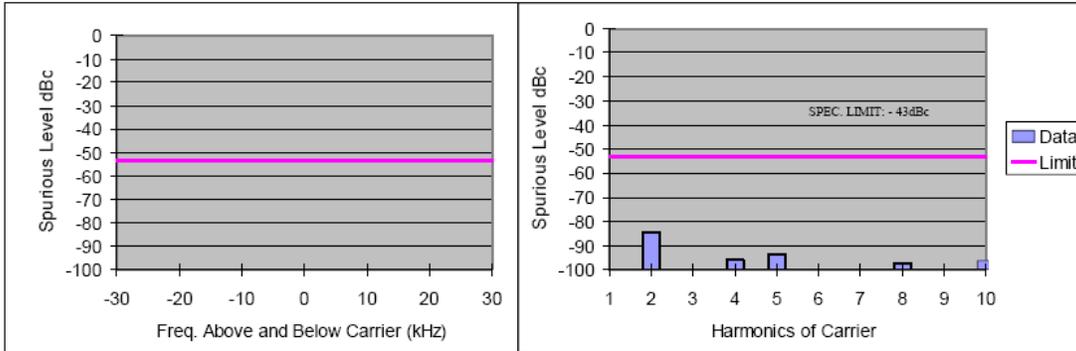


Figure 6I-7: 11 Watt Harmonic of Carrier 136.025 MHz, 25 KHz Channel Spacing

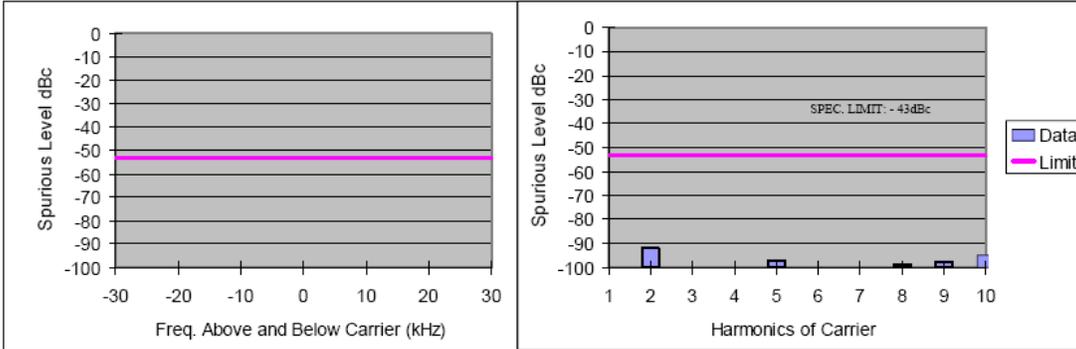


Figure 6G-8: 11 Watt Harmonic of Carrier 155.025 MHz, 25 KHz Channel Spacing

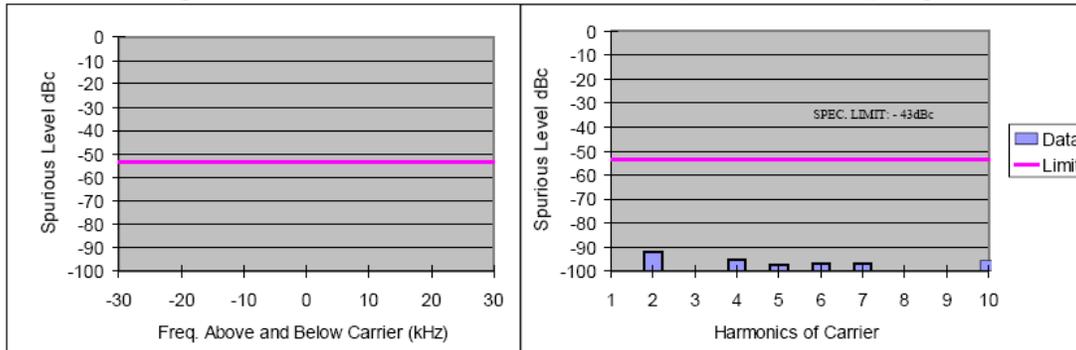


Figure 6G-9: 11 Watt Harmonic of Carrier 173.975 MHz, 25 KHz Channel Spacing

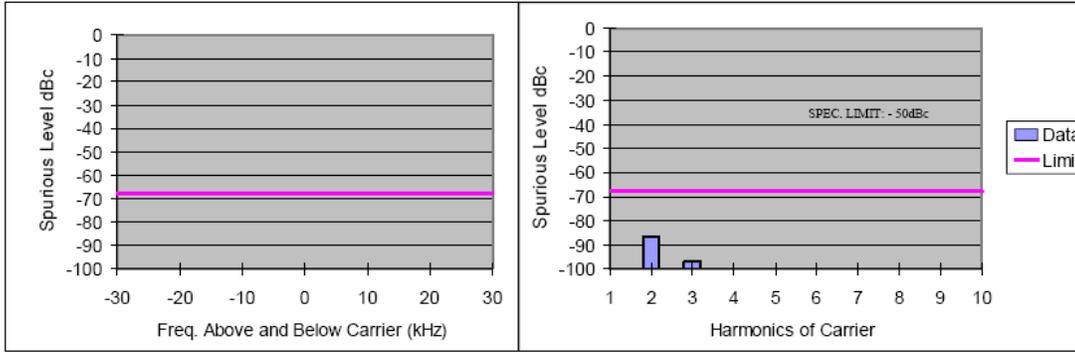


Figure 6G-10: 60 Watts Harmonic of Carrier 136.025 MHz, 25 KHz Channel Spacing

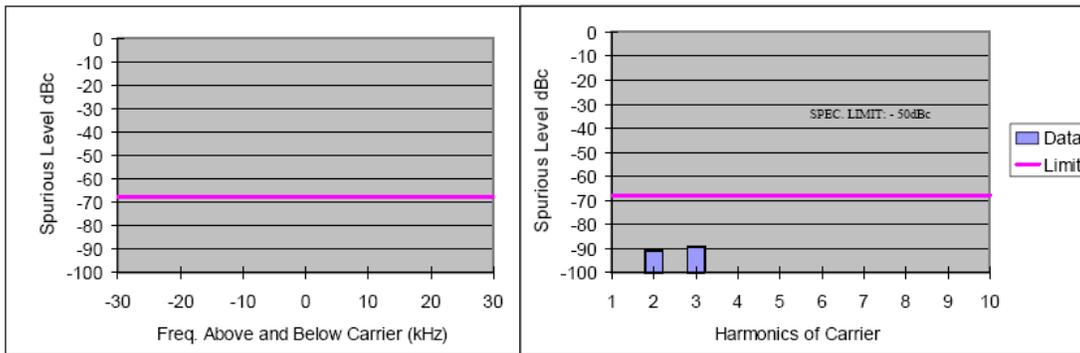


Figure 6G-11: 60 Watts Harmonic of Carrier 155.025 MHz, 25 KHz Channel Spacing

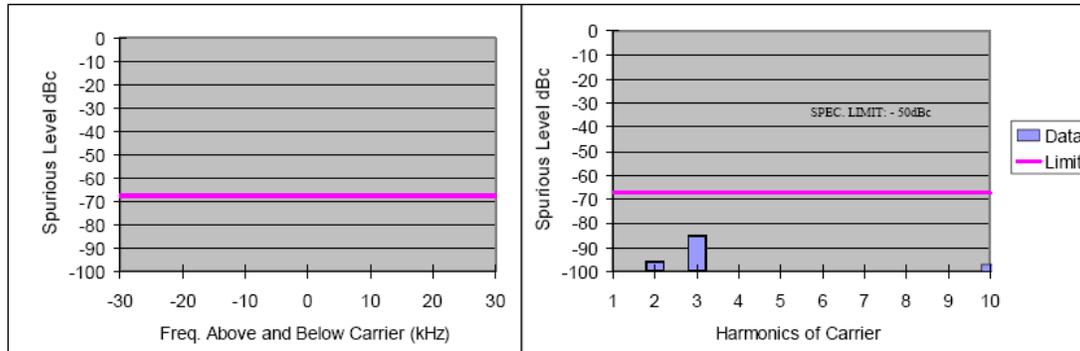


Figure 6G-12: 60 Watts Harmonic of Carrier 173.975 MHz, 25 KHz Channel Spacing

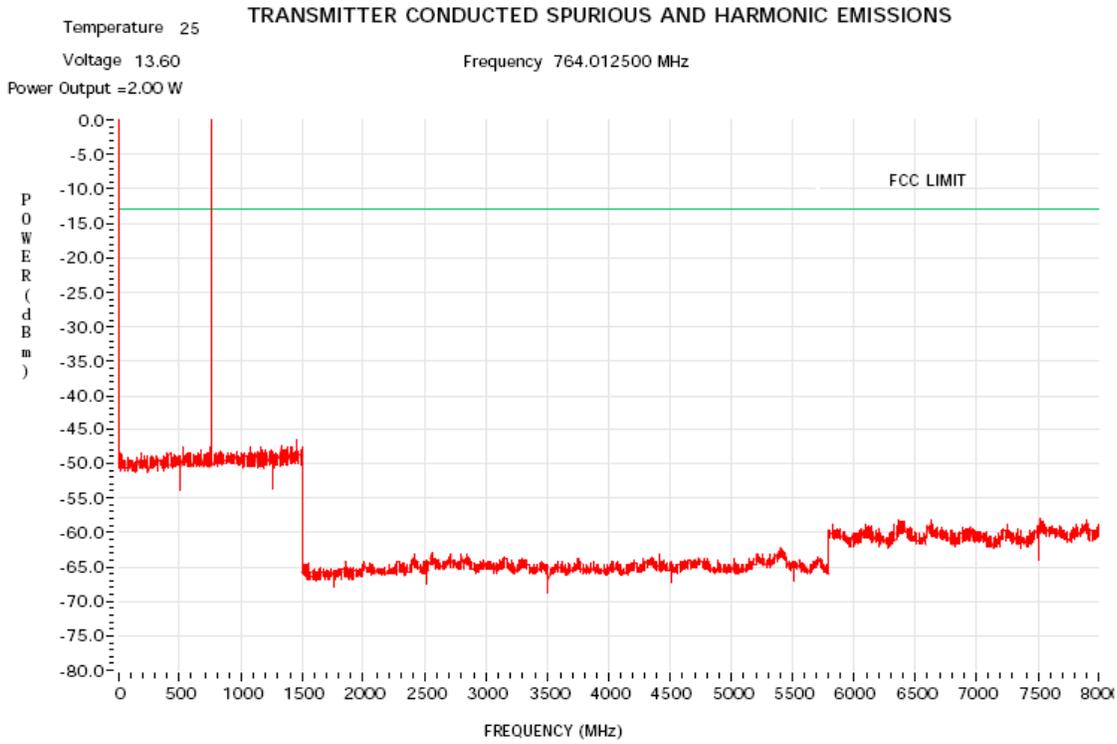


Figure 6G-13: 2 Watts Harmonic of Carrier 764.0125 MHz

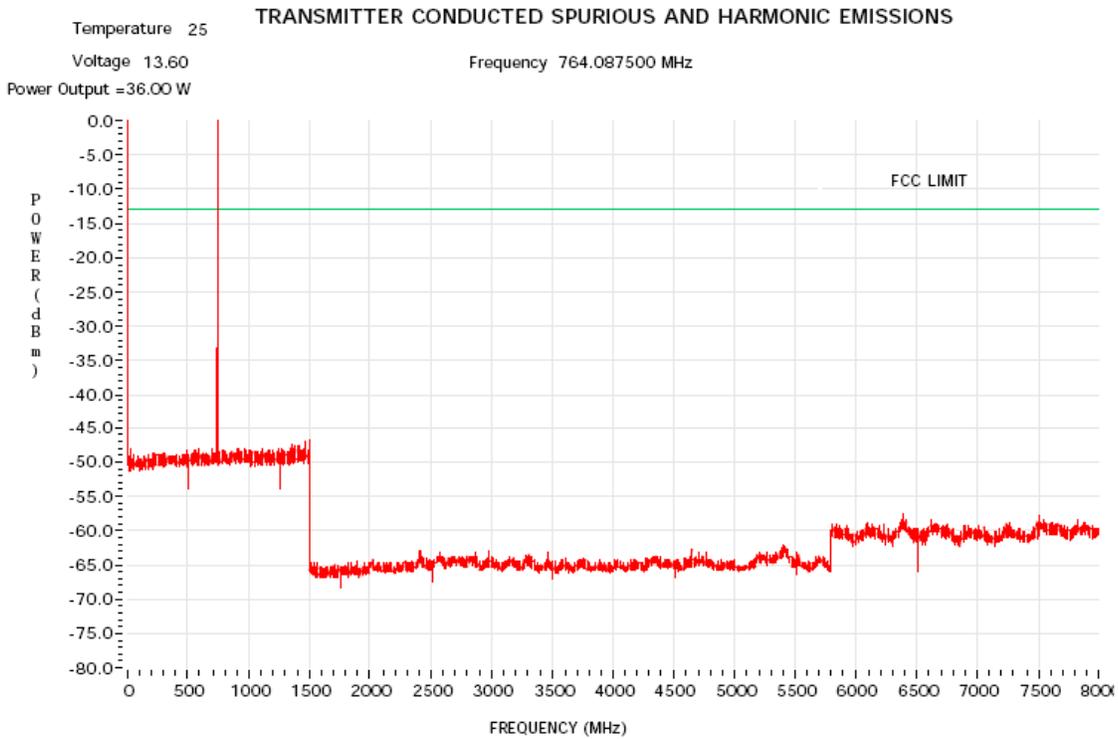


Figure 6G-14: 36 Watts Harmonic of Carrier 764.0875 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =36.00 W

Frequency 775.987500 MHz

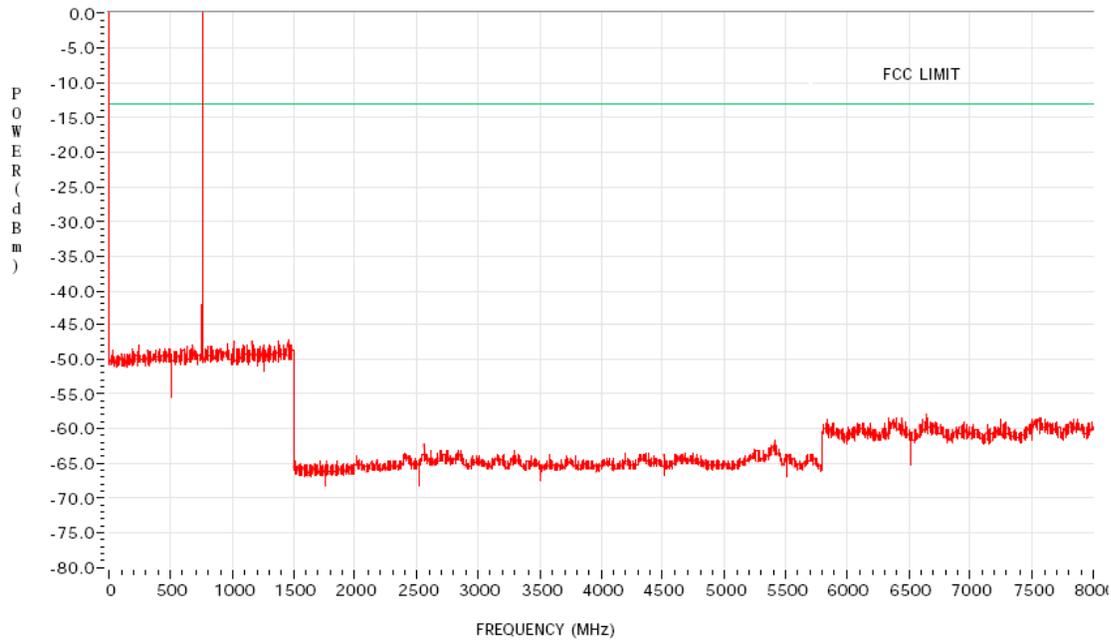


Figure 6G-15: 36 Watts Harmonic of Carrier 775.9875 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =36.00 W

Frequency 794.012500 MHz

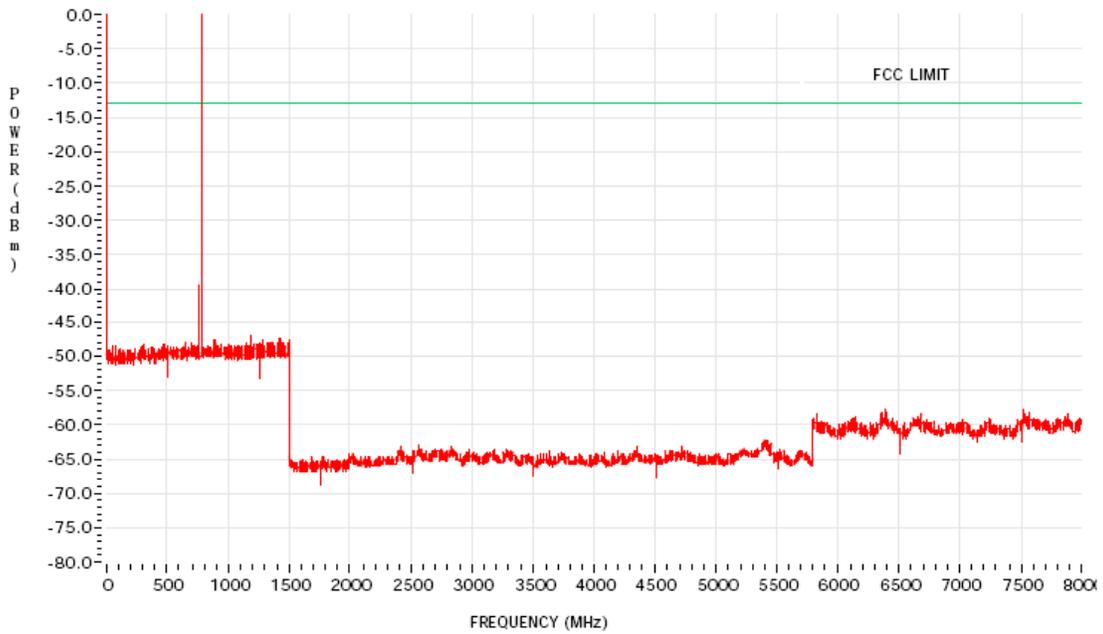


Figure 6G-16: 36 Watts Harmonic of Carrier 764.0125 MHz

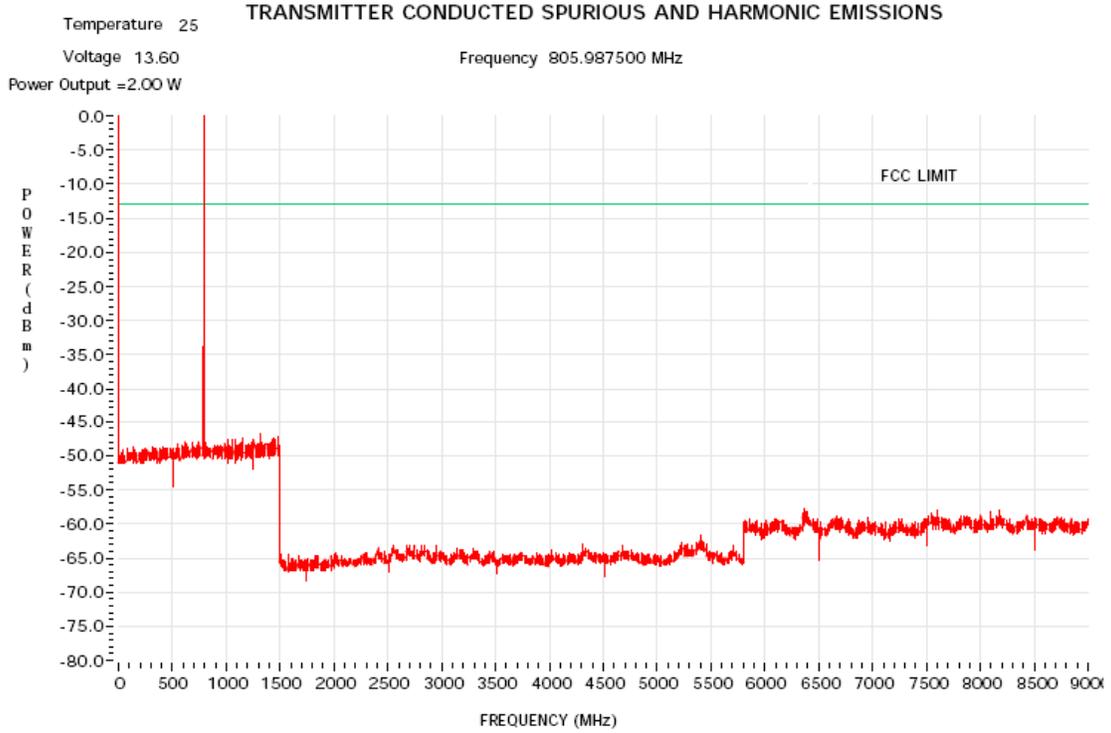


Figure 6G-17: 2 Watts Harmonic of Carrier 805.9875 MHz

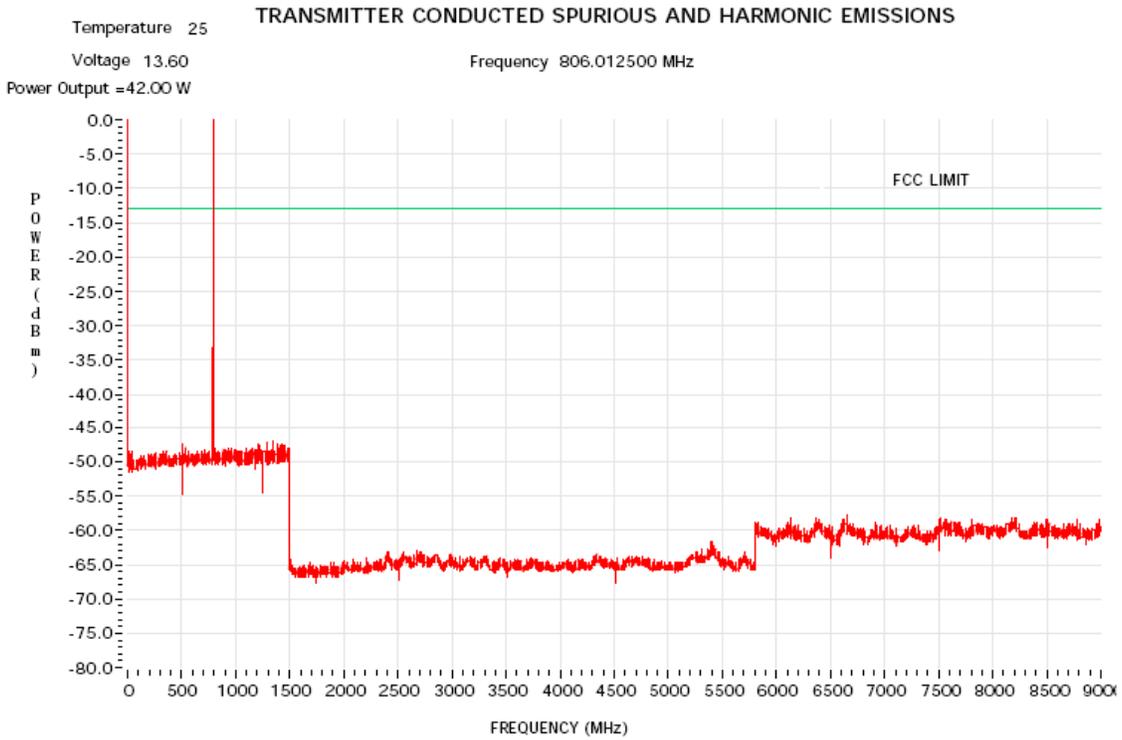


Figure 6G-18: 42 Watts Harmonic of Carrier 806.0125 MHz

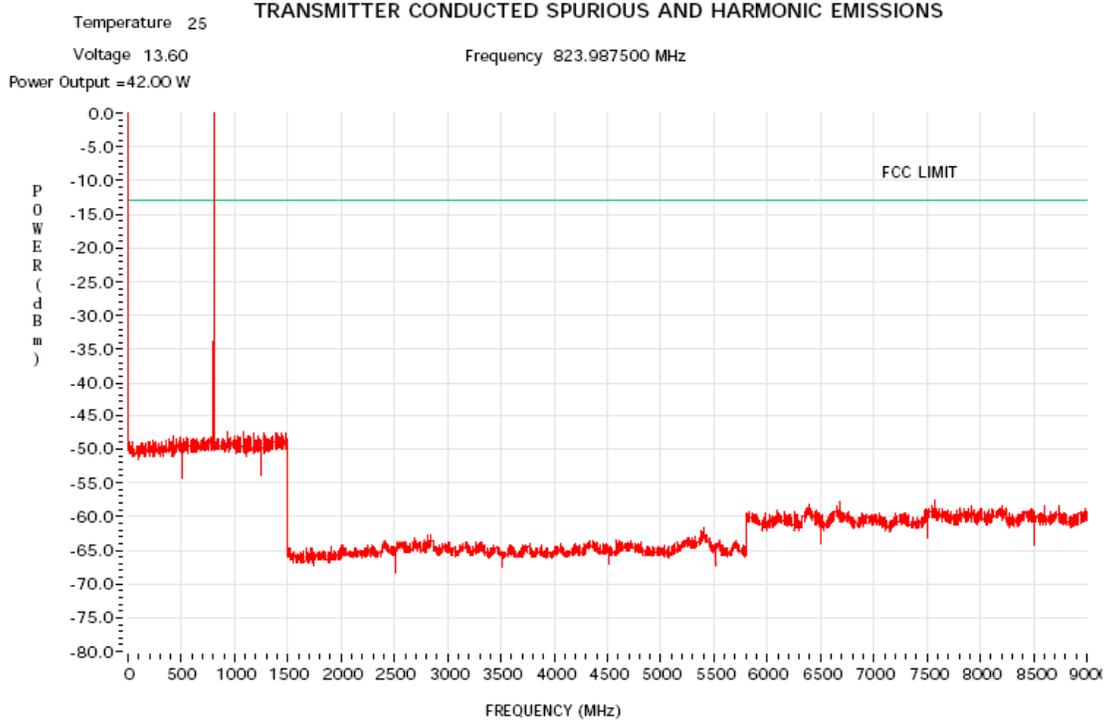


Figure 6G-19: 42 Watts Harmonic of Carrier 823.9875 MHz

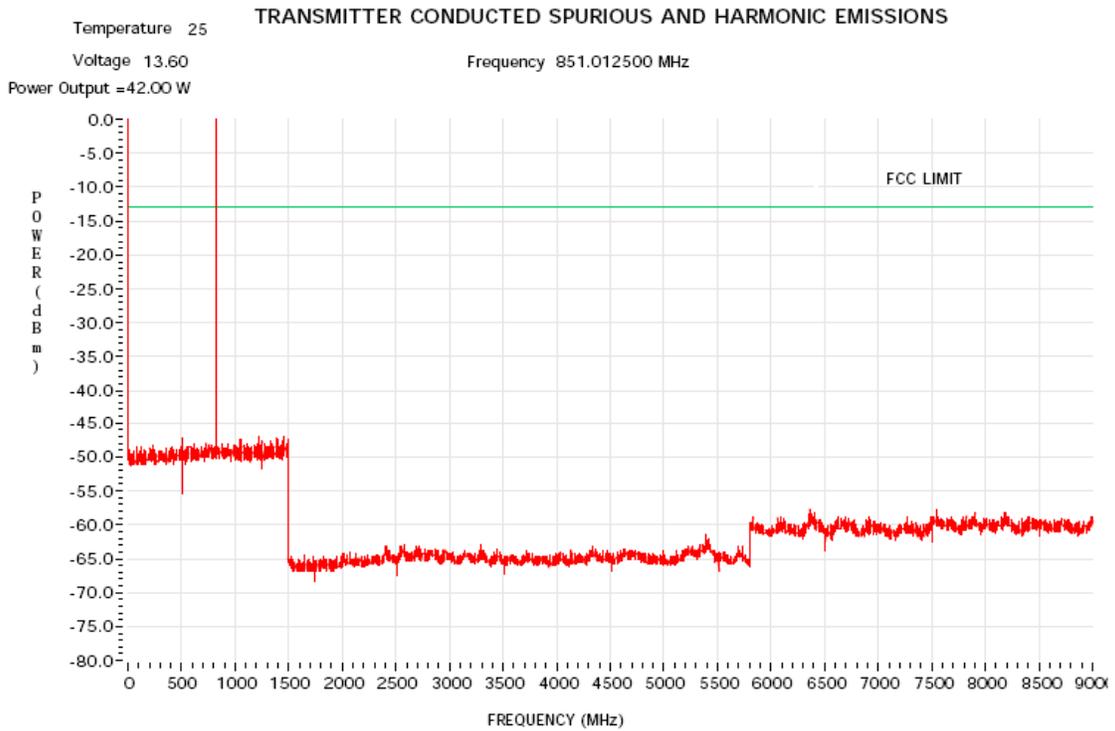


Figure 6G-20: 42 Watts Harmonic of Carrier 851.0125 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =42.00 W

Frequency 868.887500 MHz

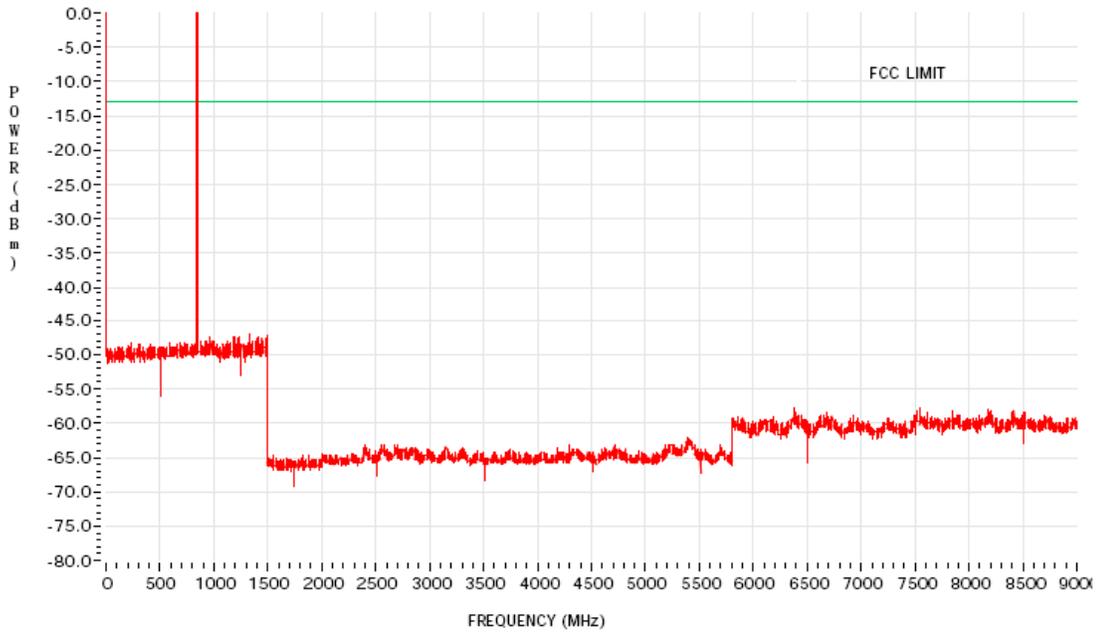


Figure 6G-21: 42 Watts Harmonic of Carrier 868.8875 MHz

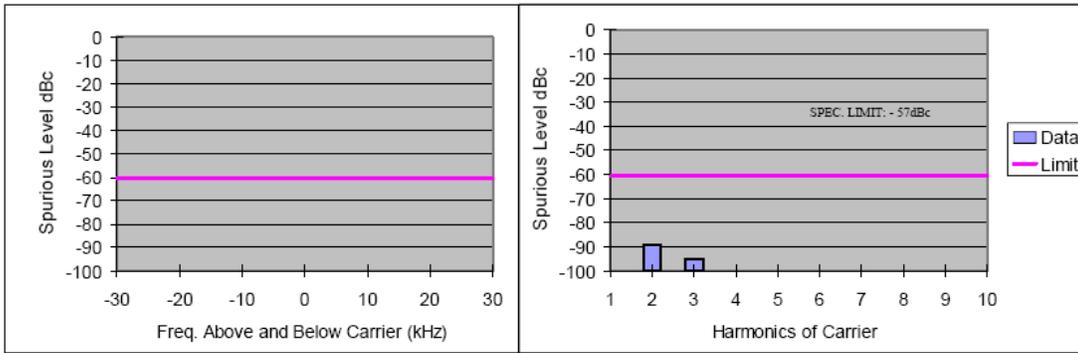


Figure 6G-22: 11 Watts Harmonic of Carrier 136.0125 MHz, 12.5 KHz Channel Spacing

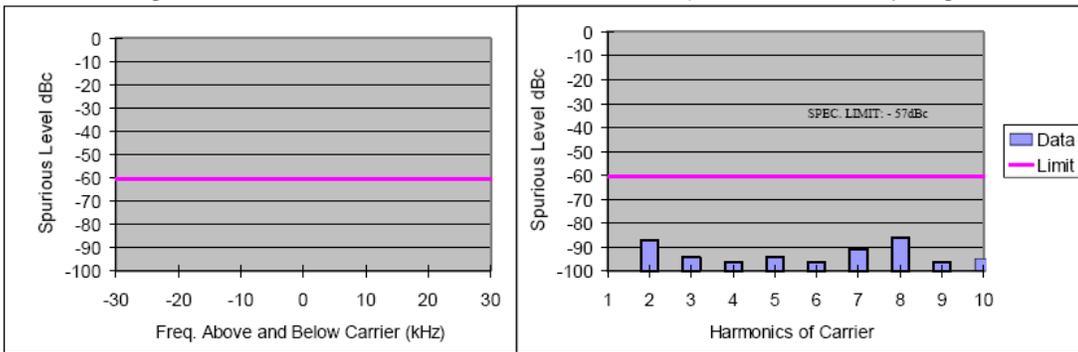


Figure 6G-23: 11 Watts Harmonic of Carrier 155.0125 MHz, 12.5 KHz Channel Spacing

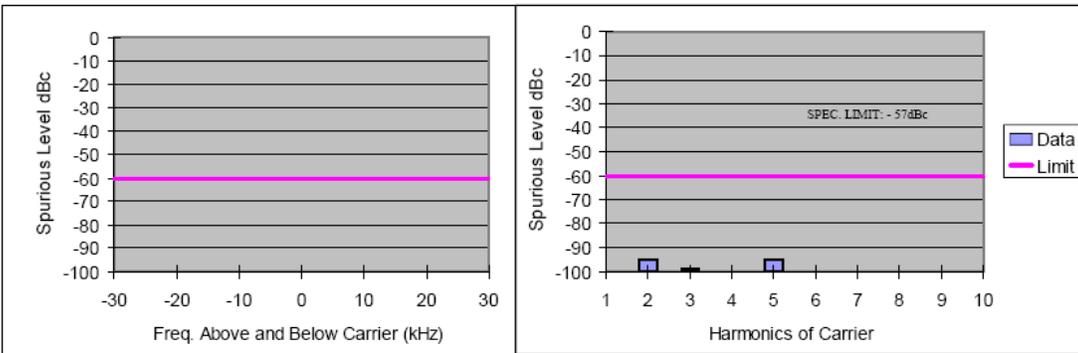


Figure 6G-24: 11 Watts Harmonic of Carrier 173.9875 MHz, 12.5 KHz Channel Spacing

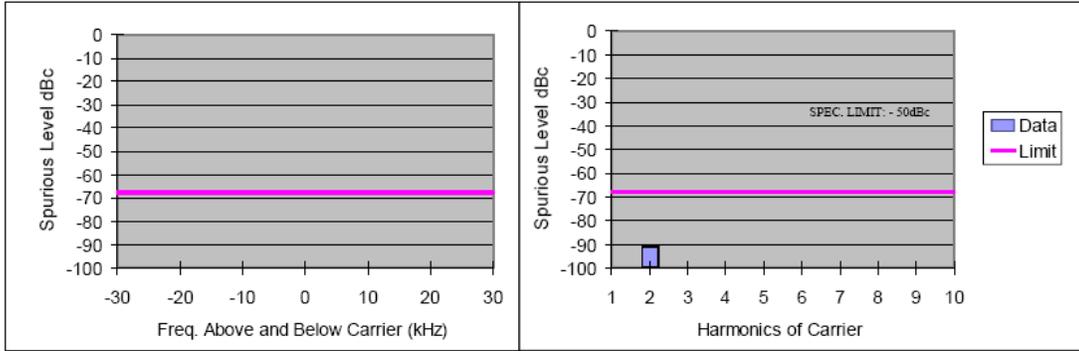


Figure 6G-25: 60 Watts Harmonic of Carrier 136.0125 MHz, 12.5 KHz Channel Spacing

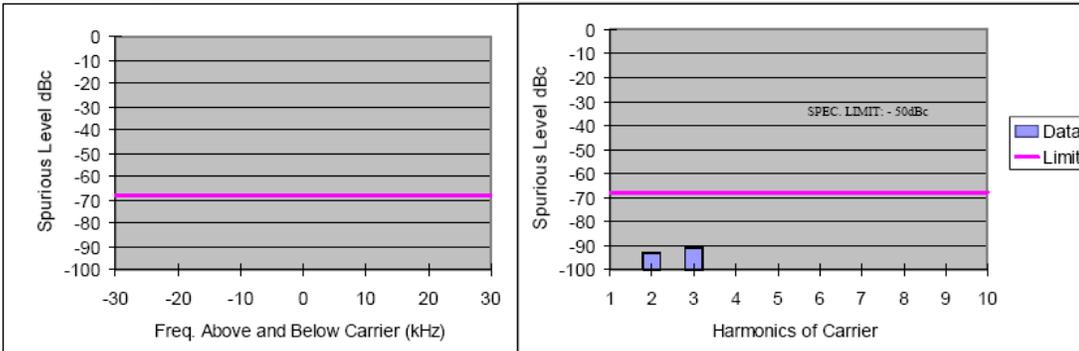


Figure 6G-26: 60Watts Harmonic of Carrier 155.0125 MHz, 12.5 KHz Channel Spacing

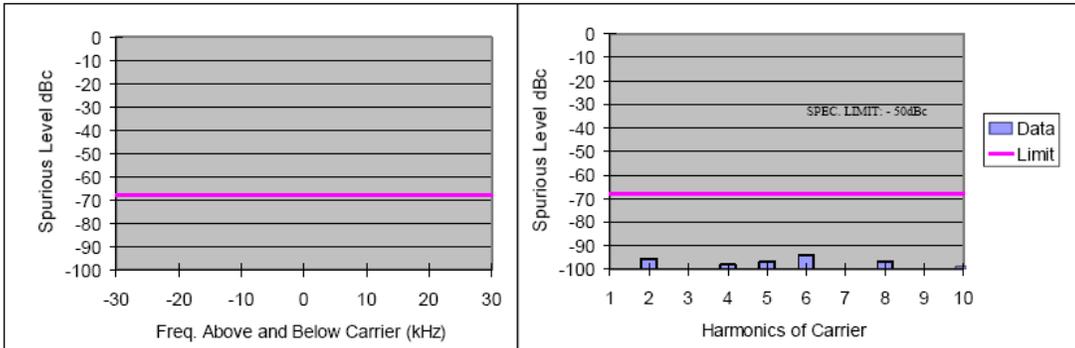


Figure 6G-27: 60 Watts Harmonic of Carrier 173.9875 MHz, 12.5 KHz Channel Spacing

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =2.00 W

Frequency 764.012500 MHz

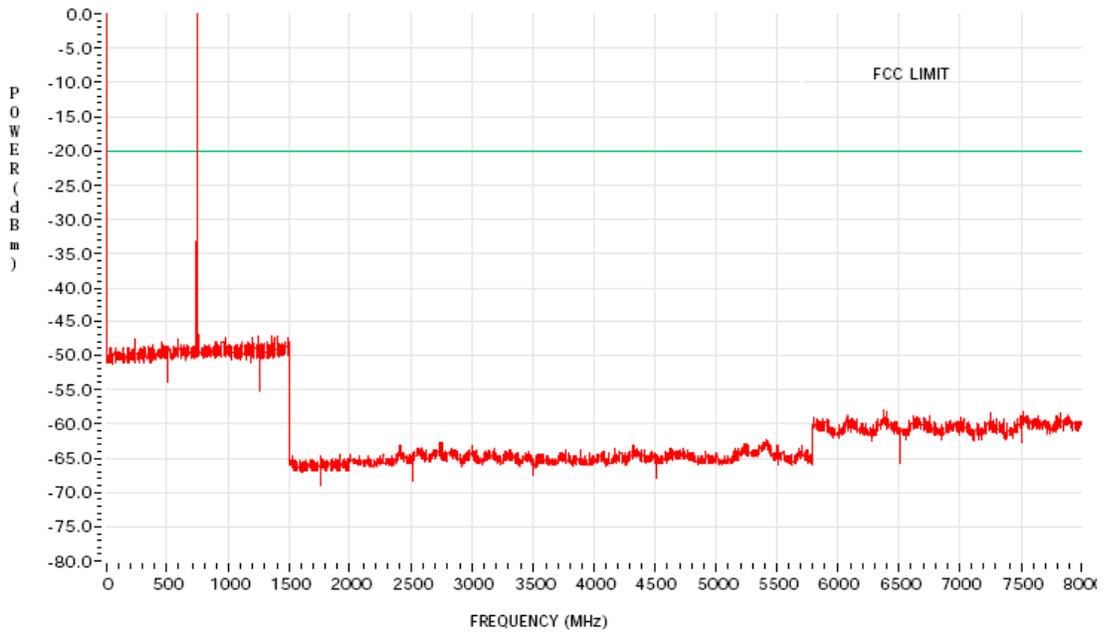


Figure 6G-28: 2 Watts Harmonic of Carrier 764.0125 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =36.00 W

Frequency 764.087500 MHz

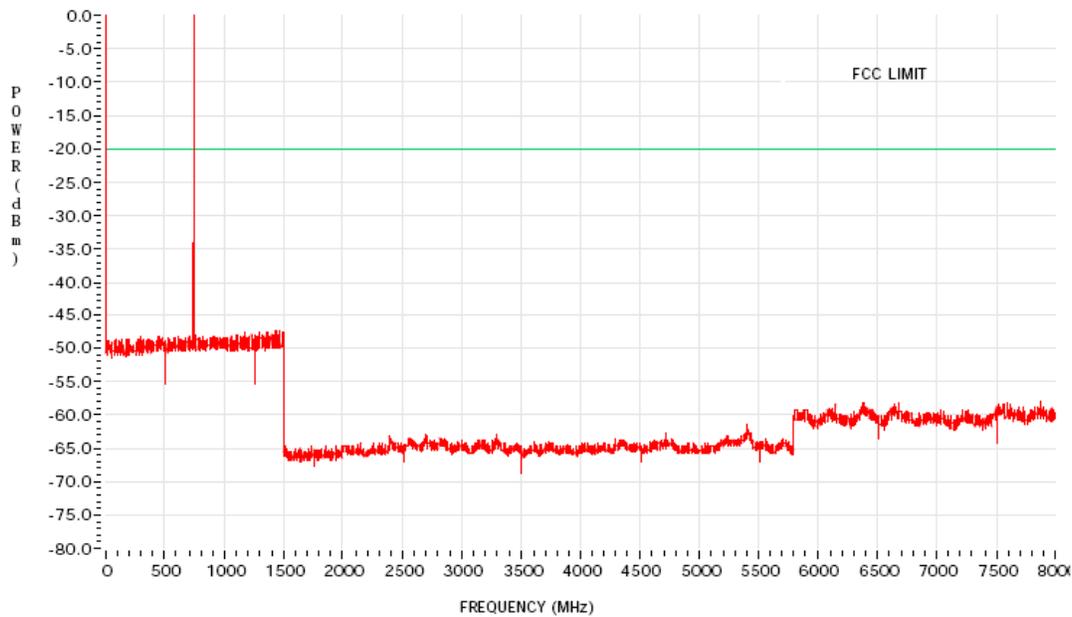


Figure 6G-29: 36 Watts Harmonic of Carrier 764.0875 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =2.00 W

Frequency 805.987500 MHz

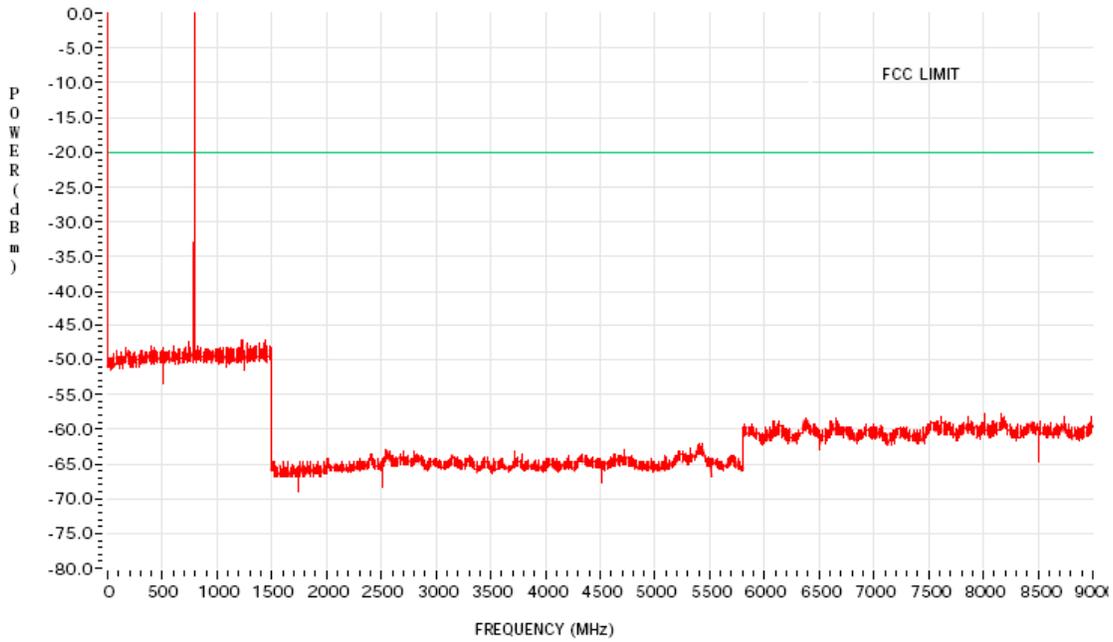


Figure 6G-30: 2 Watts Harmonic of Carrier 805.9875MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =42.00 W

Frequency 823.987500 MHz

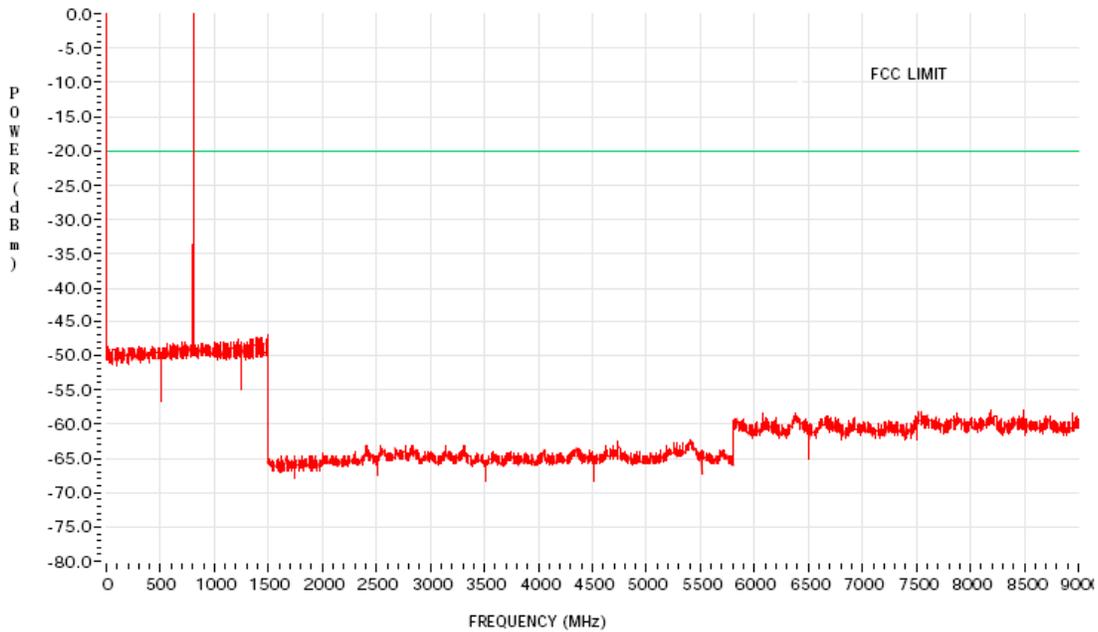


Figure 6G-31: 42 Watts Harmonic of Carrier 823.9875 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25

Voltage 13.60

Frequency 868.887500 MHz

Power Output =42.00 W

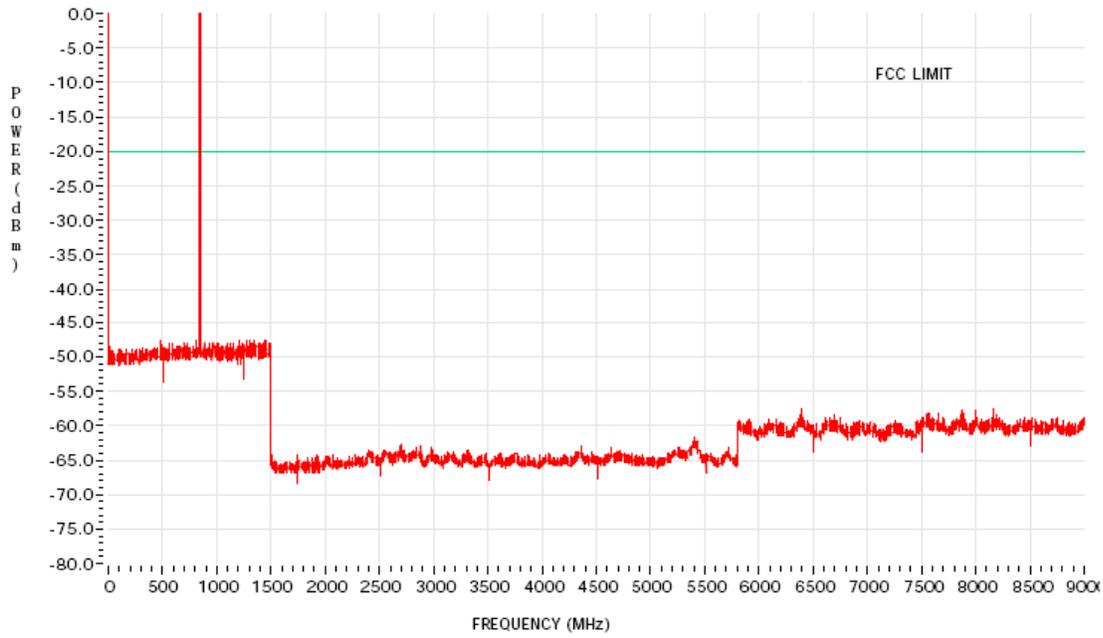


Figure 6G-32: 42 Watts Harmonic of Carrier 868.8875 MHz

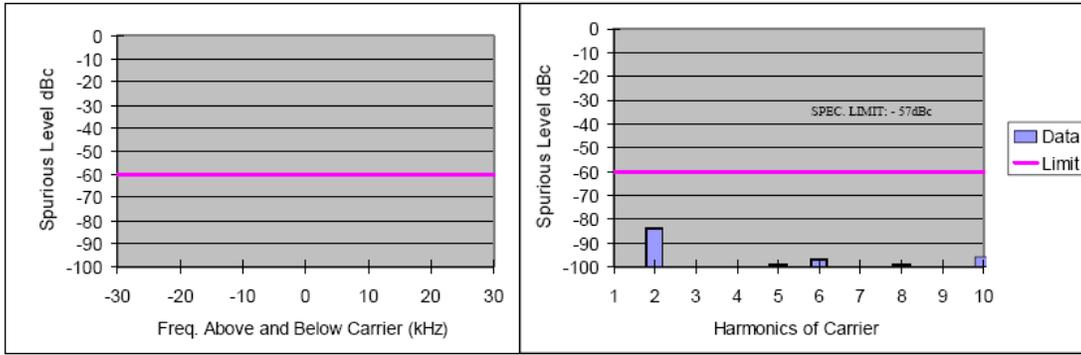


Figure 6G-33: 11 Watts Harmonic of Carrier 136.0125 MHz, 12.5 KHz Channel Spacing

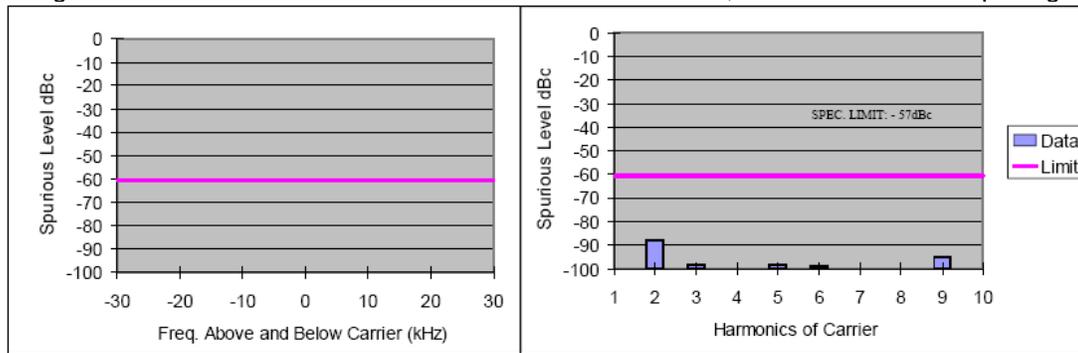


Figure 6G-34: 11 Watts Harmonic of Carrier 155.0125 MHz, 12.5 KHz Channel Spacing

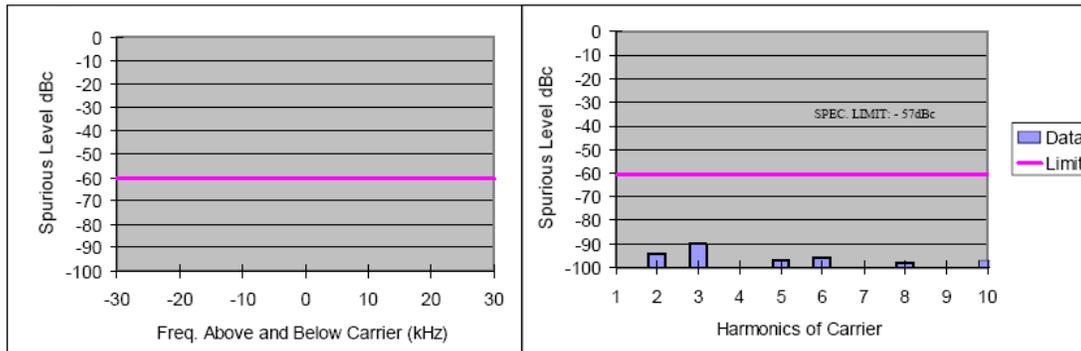


Figure 6G-35: 11 Watts Harmonic of Carrier 173.9875 MHz, 12.5 KHz Channel Spacing

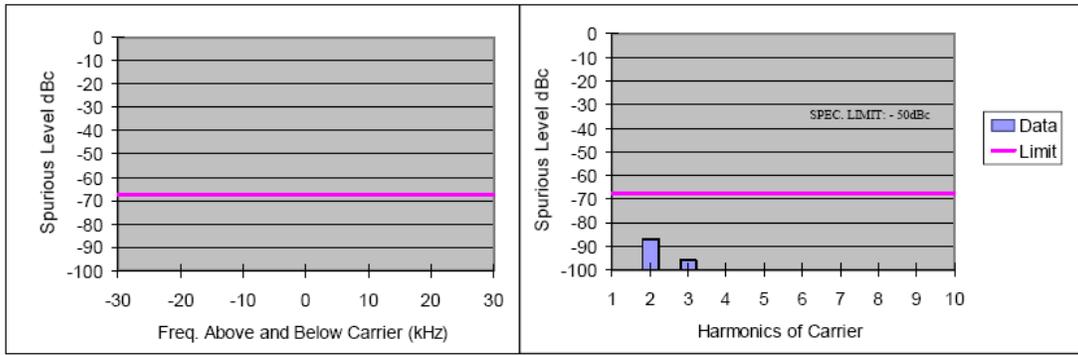


Figure 6G-36: 60 Watts Harmonic of Carrier 136.0125 MHz, 12.5 KHz Channel Spacing

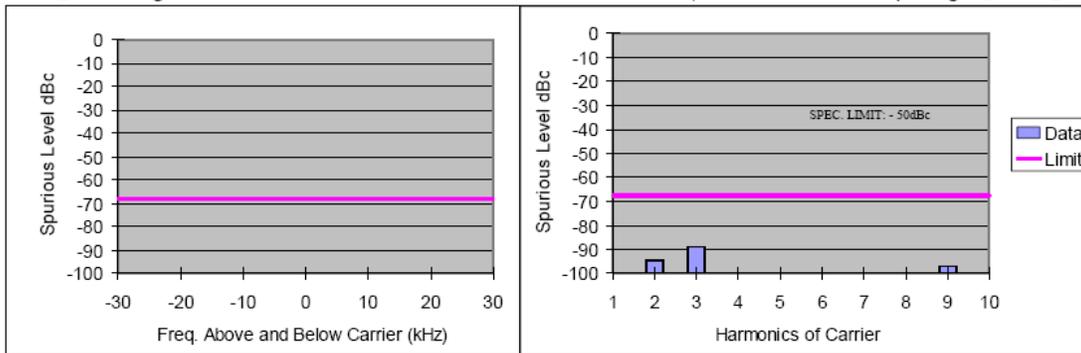


Figure 6G-37: 60Watts Harmonic of Carrier 155.0125 MHz, 12.5 KHz Channel Spacing

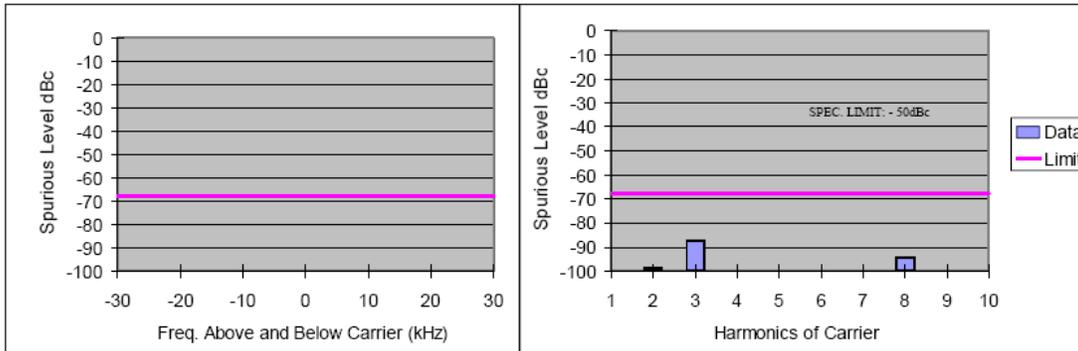


Figure 6G-38: 60 Watts Harmonic of Carrier 173.9875 MHz, 12.5 KHz Channel Spacing

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =2.00 W

Frequency 764.012500 MHz

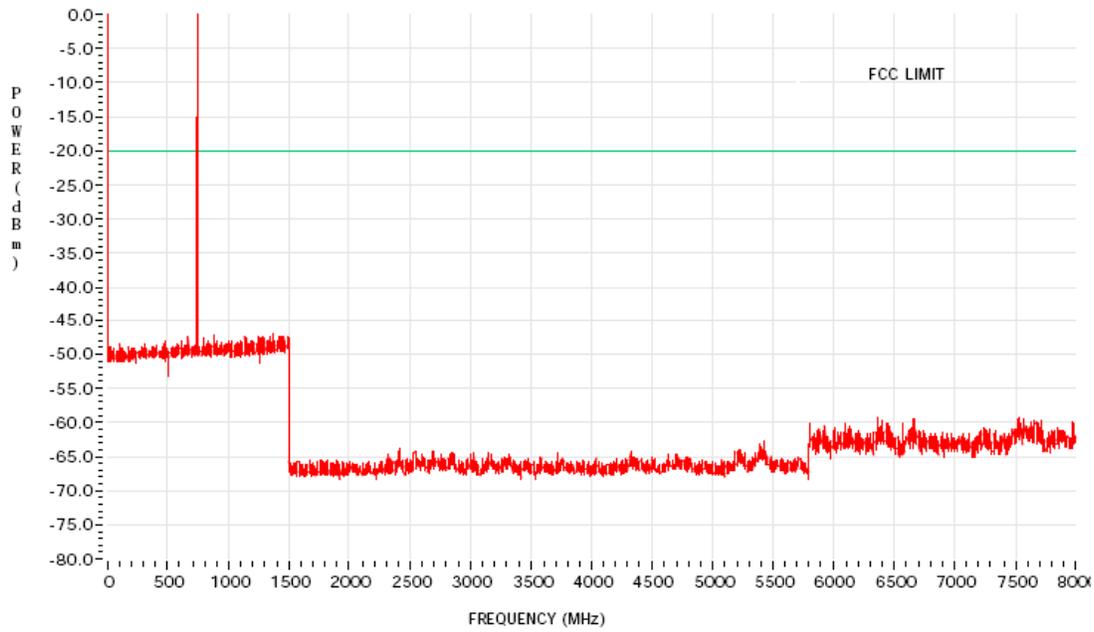


Figure 6G-39: 2 Watts Harmonic of Carrier 764.0125 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25  
Voltage 13.60  
Power Output =36.00 W

Frequency 764.087500 MHz

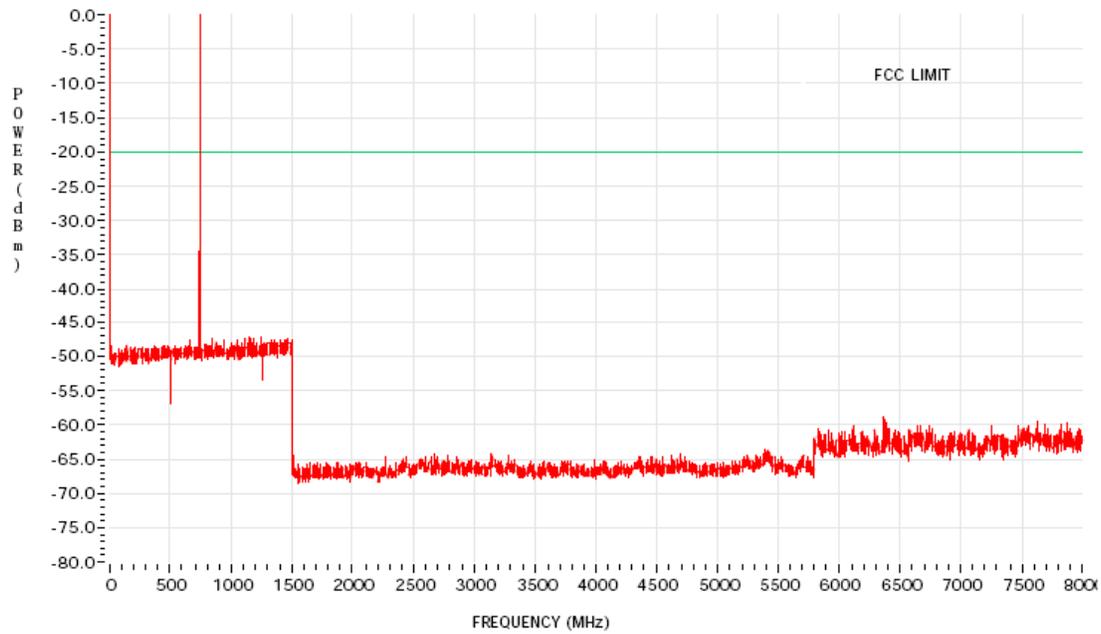


Figure 6G-40: 36 Watts Harmonic of Carrier 764.0875 MHz

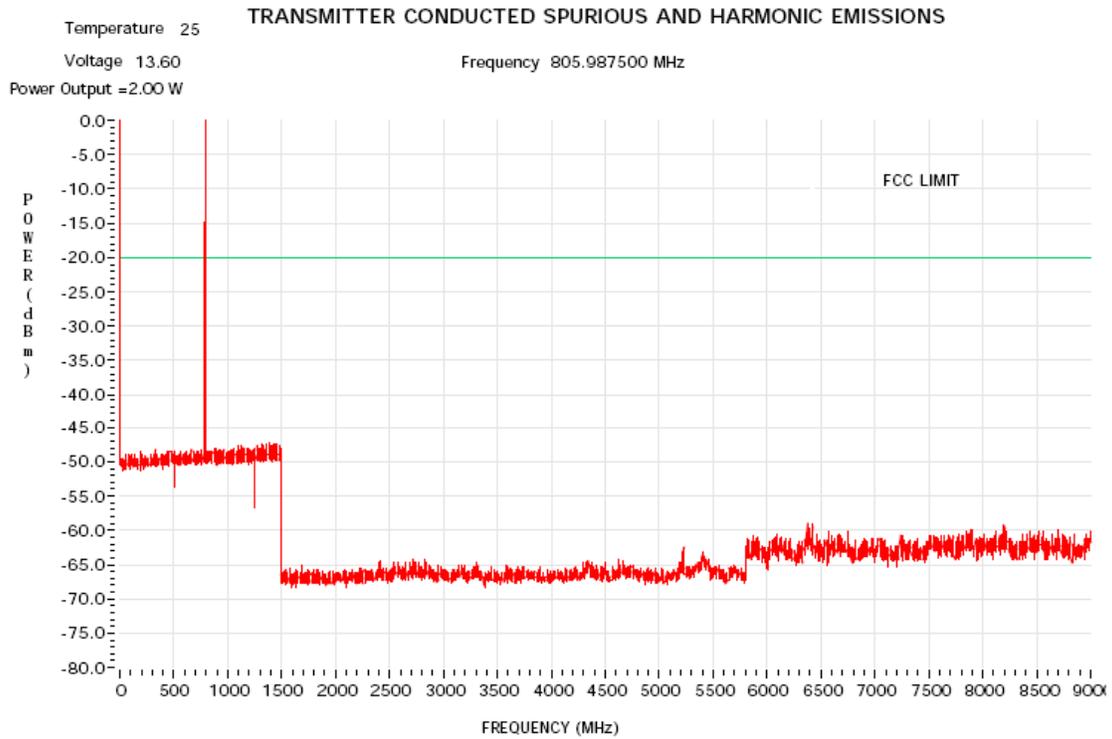


Figure 6G-41: 2 Watts Harmonic of Carrier 805.9875 MHz

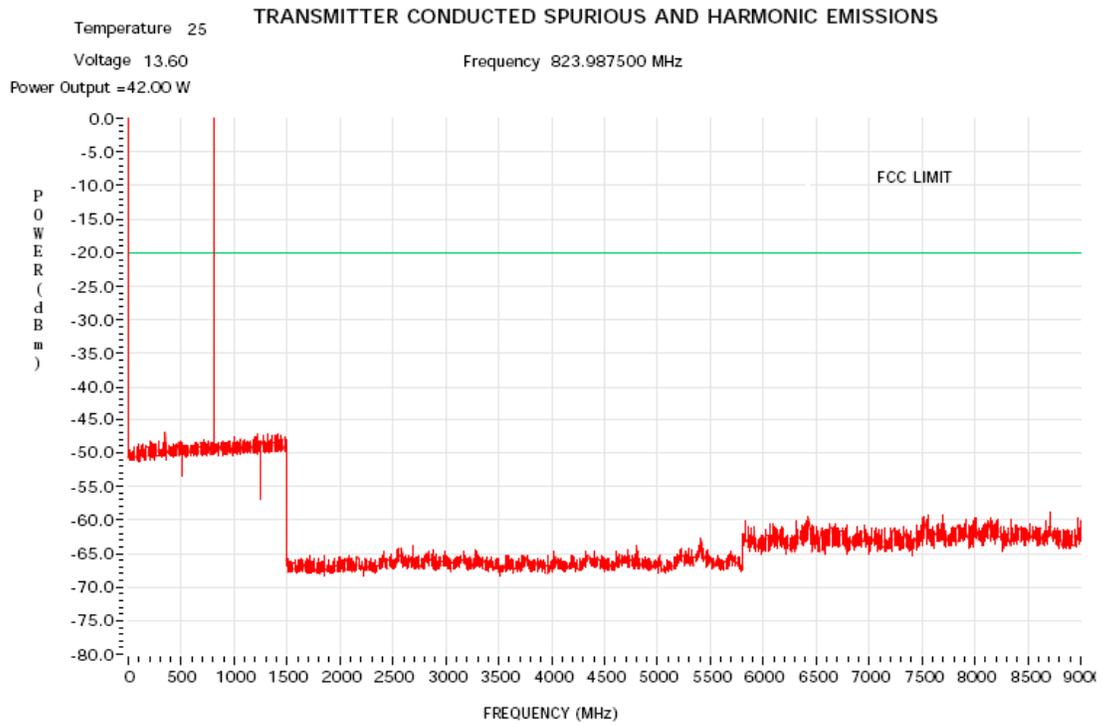


Figure 6G-28: 42 Watts Harmonic of Carrier 823.9875 MHz

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

Temperature 25

Voltage 13.60

Frequency 868.887500 MHz

Power Output =42.00 W

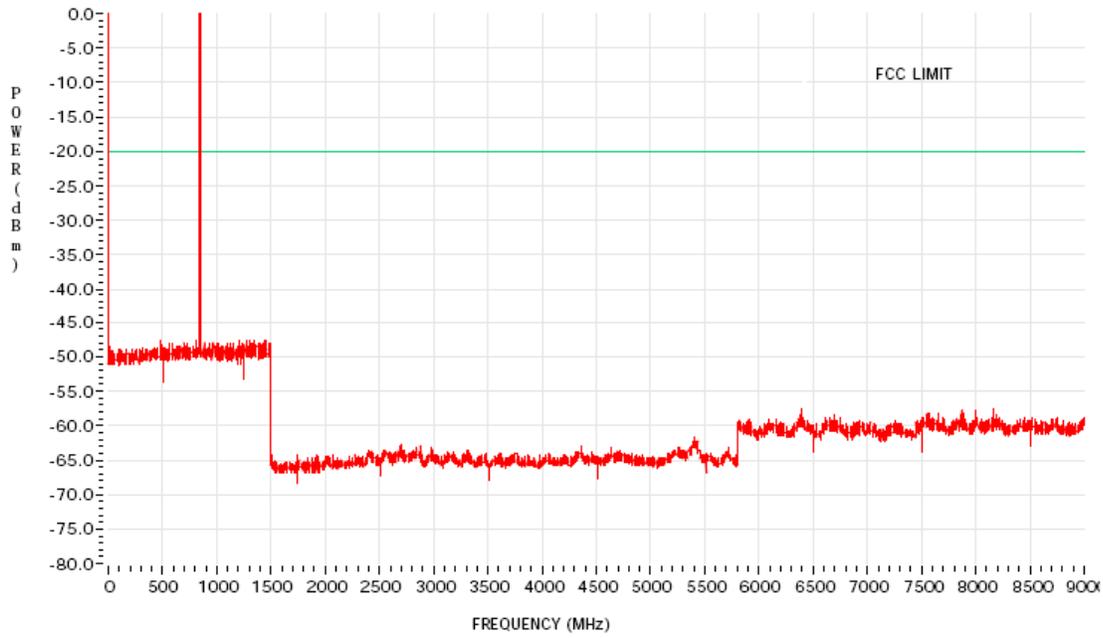


Figure 6G-29: 43 Watts Harmonic of Carrier 868.8875MHz


EXHIBIT 6H

Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

VHF

136.0125 MHz Channel Spacing 12.5kHz | S/N QM0KW05X


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
272.0250	-20	*	*
408.0375	-20	-76.84	-72.42
544.0500	-20	*	*
680.0625	-20	*	*
816.0750	-20	-62.12	*
952.0875	-20	-57.04	-61.42
1088.1000	-20	*	*
1224.1125	-20	-71.03	-68.77
1360.1250	-20	-74.99	*

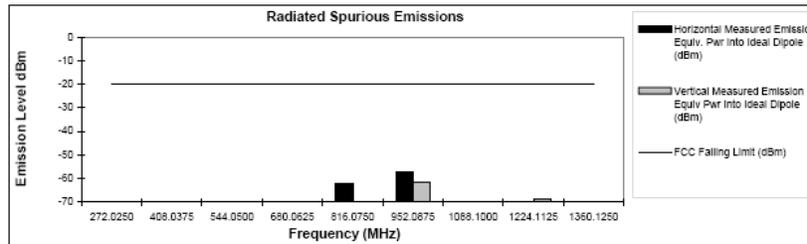

Transmit Radiated Spurious Emissions: Mackinaw APX7500  
Tx Power: 57 Watts

153.0125 MHz Channel Spacing 12.5kHz | S/N QM0KW05X

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
306.0250	-20	*	*
459.0375	-20	-81.30	*
612.0500	-20	*	*
765.0625	-20	-72.27	*
918.0750	-20	-71.57	*
1071.0875	-20	*	*
1224.1000	-20	-76.51	*
1377.1125	-20	*	*
1530.1250	-20	*	*

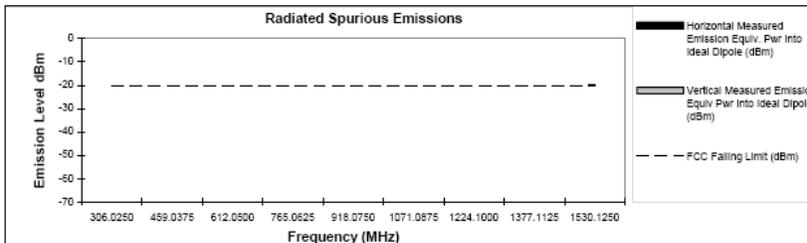

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.  
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader  
FCC Registration: 91932 / Industry Canada: IC109U-1

July 18, 2009

Figure 6H-1: 60 Watts, 136.025 MHz, 12.5 KHz Channel Spacing & 60 Watts, 155.025 MHz, 12.5 KHz Channel Spacing


**Transmit Radiated Spurious Emissions: Mackinaw APX7500**

**Tx Power: 57 Watts**

**173.9875 MHz**

**Channel Spacing 12.5kHz | S/N QM0KW05X**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
347.9750	-20	*	*
521.9625	-20	*	*
695.9500	-20	*	*
869.9375	-20	*	*
1043.9250	-20	*	*
1217.9125	-20	*	*
1391.9000	-20	*	*
1565.8875	-20	*	*
1739.8750	-20	*	*

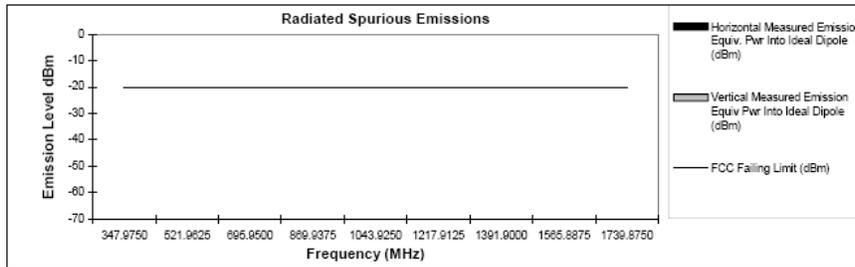

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.  
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


Motorola Plantation EMC Lab – Test Performed by: Frank Baader  
 FCC Registration: 91932 / Industry Canada: IC109U-1

July 18, 2009

**Figure 6H-2: 60 Watts, 173.975 MHz, 12.5 KHz Channel Spacing**

Tx Power: 11 Watts  
Channel Spacing 12.5kHz | S/N QM0KW05X


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
272.0250	-20	*	*
408.0375	-20	*	*
544.0500	-20	*	*
680.0625	-20	*	*
816.0750	-20	*	*
952.0875	-20	*	*
1088.1000	-20	*	*
1224.1125	-20	*	*
1360.1250	-20	*	*

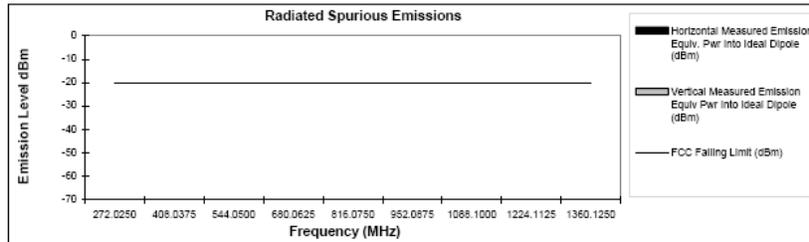

Transmit Radiated Spurious Emissions: Mackinaw APX7500  
Tx Power: 11 Watts

Channel Spacing 12.5kHz | S/N QM0KW05X

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
306.0250	-20	*	*
459.0375	-20	*	*
612.0500	-20	*	*
765.0625	-20	*	*
918.0750	-20	*	*
1071.0875	-20	*	*
1224.1000	-20	*	*
1377.1125	-20	*	*
1530.1250	-20	*	*

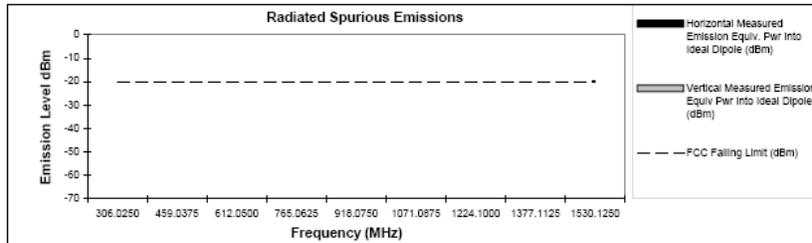

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.  
The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader


July 18, 2009

**Figure 6H-3: 11 Watts, 136.025 MHz, 25 KHz Channel Spacing & 11 Watts, 155.025 MHz, 25 KHz Channel Spacing**

**Transmit Radiated Spurious Emissions: Mackinaw APX7500**  
**Tx Power: 11 Watts**

**173.9875 MHz Channel Spacing 12.5kHz | S/N QM0KW05X**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
347.9750	-20	*	*
521.9625	-20	*	*
695.9500	-20	*	*
869.9375	-20	*	*
1043.9250	-20	*	*
1217.9125	-20	*	*
1391.9000	-20	*	*
1565.8875	-20	*	*
1739.8750	-20	*	*

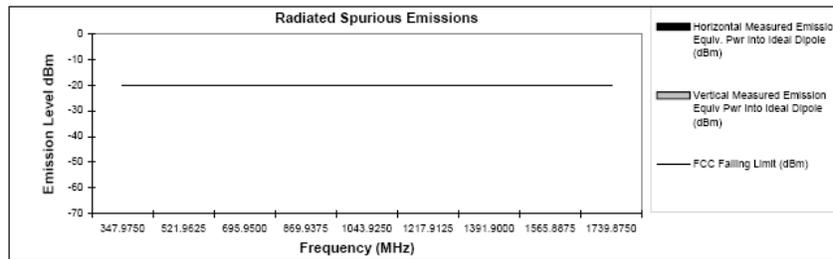

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.  
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader  
 FCC Registration: 91932 / Industry Canada: IC109U-1

July 18, 2009

**Figure 6H-4: 11 Watts, 173.975 MHz, 25 KHz Channel Spacing**


**Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)**

**Tx Power: 2 Watts**

**764.0125 MHz**

**Channel Spacing 25kHz | S/N 1MWM380019**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.0250	-13	*	-71.30
2292.0375	-13	*	*
3056.0500	-13	*	*
3820.0625	-13	*	*
4584.0750	-13	*	*
5348.0875	-13	*	*
6112.1000	-13	*	*
6876.1125	-13	*	*
7640.1250	-13	*	*

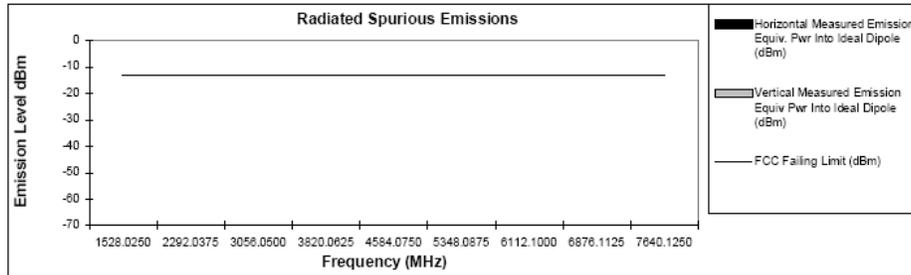

**Figure 6H-5: 2 Watts, 764.0125MHz, 25 KHz Channel Spacing**


**Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)**

**Tx Power: 36 Watts**

**764.0875 MHz**

**Channel Spacing 25kHz | S/N 1MWM570169**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-13	-65.79	-63.00
2292.2625	-13	-56.91	-57.01
3056.3500	-13	-56.19	-53.94
3820.4375	-13	-60.79	-60.31
4584.5250	-13	-59.77	*
5348.6125	-13	*	*
6112.7000	-13	*	*
6876.7875	-13	*	*
7640.8750	-13	*	*

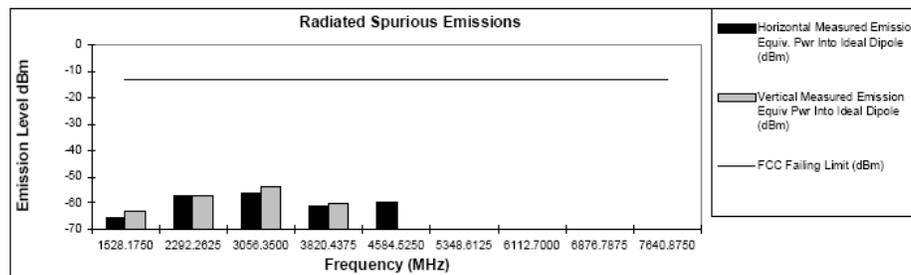

**Figure 6H-6: 36 Watts, 764.0875MHz, 25 KHz Channel Spacing**

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 36 Watts

775.9875 MHz Channel Spacing 25kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1551.9750	-13	-68.94	-65.82
2327.9625	-13	-53.50	-51.25
3103.9500	-13	-58.43	-54.21
3879.9375	-13	-60.77	-58.08
4655.9250	-13	-56.98	*
5431.9125	-13	*	*
6207.9000	-13	*	*
6983.8875	-13	*	*
7759.8750	-13	*	*

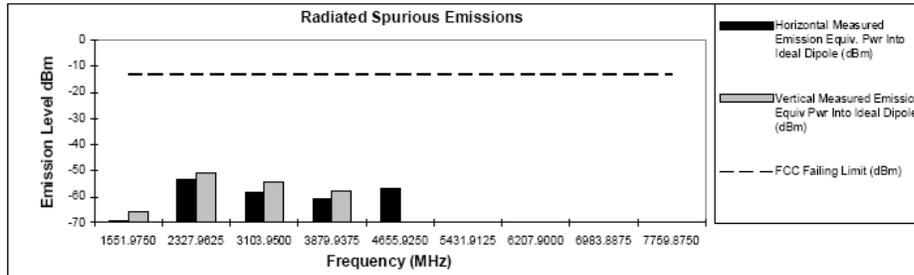


Figure 6H-7: 36 Watts, 775.9875MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 36 Watts

794.0125 MHz Channel Spacing 25kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.0250	-13	-68.44	-67.47
2382.0375	-13	-46.93	-48.47
3176.0500	-13	-61.39	-58.45
3970.0625	-13	-58.24	-55.60
4764.0750	-13	-56.96	*
5558.0875	-13	*	*
6352.1000	-13	*	*
7146.1125	-13	*	*
7940.1250	-13	*	*

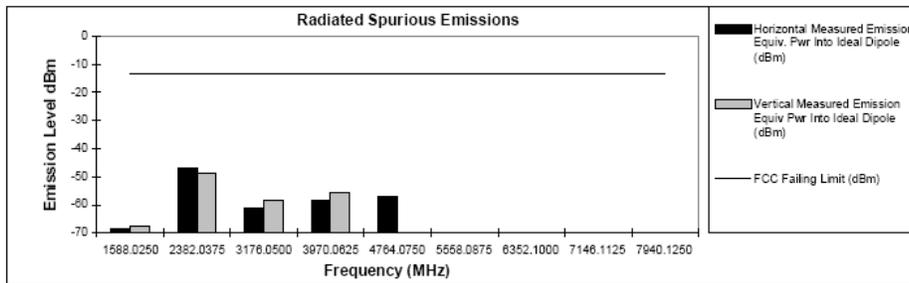


Figure 6H-8: 36 Watts, 794.0125MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 2 Watts

805.9875 MHz Channel Spacing 25kHz | S/N 1MWM380019

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1611.9750	-13	*	*
2417.9625	-13	*	*
3223.9500	-13	*	*
4029.9375	-13	-60.57	*
4835.9250	-13	*	*
5641.9125	-13	*	*
6447.9000	-13	*	*
7253.8875	-13	*	*
8059.8750	-13	*	*

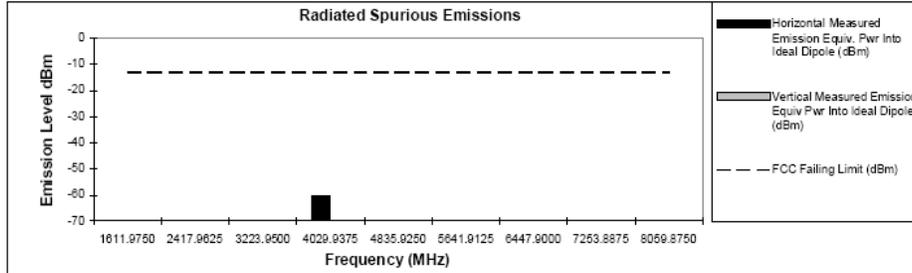


Figure 6H-9: 36 Watts, 805.9875MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 42 Watts

806.0125 MHz Channel Spacing 25kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-13	-68.75	-68.61
2418.0375	-13	-37.30	-38.49
3224.0500	-13	-56.90	-57.76
4030.0625	-13	-56.33	-48.92
4836.0750	-13	-61.38	-54.43
5642.0875	-13	*	*
6448.1000	-13	*	*
7254.1125	-13	*	*
8060.1250	-13	*	*

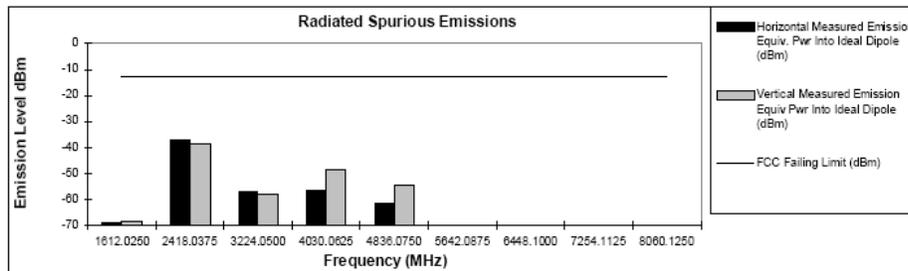


Figure 6H-10: 42 Watts, 806.0125MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 42 Watts

823.9875 MHz Channel Spacing 25kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1647.9750	-13	-69.13	-66.20
2471.9625	-13	-40.16	-45.18
3295.9500	-13	-61.27	-58.49
4119.9375	-13	-57.27	-53.94
4943.9250	-13	*	-56.61
5767.9125	-13	*	*
6591.9000	-13	*	*
7415.8875	-13	*	*
8239.8750	-13	*	*

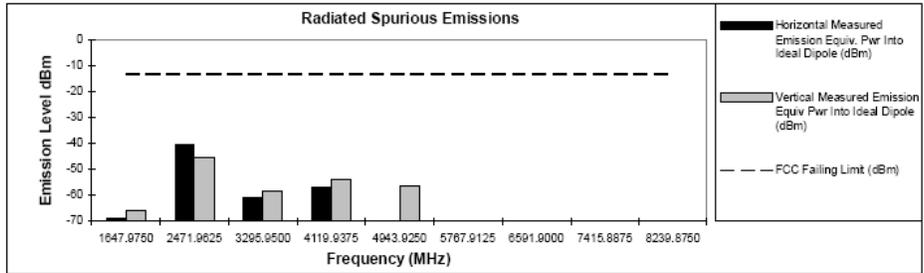


Figure 6H-11: 42 Watts, 823.9875MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (Analog Mode)  
Tx Power: 42 Watts

851.0125 MHz Channel Spacing 25kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1702.0250	-13	-68.10	-67.39
2553.0375	-13	-42.64	-39.50
3404.0500	-13	-62.48	-62.33
4255.0625	-13	-56.72	-58.35
5106.0750	-13	*	-57.33
5957.0875	-13	-53.40	*
6808.1000	-13	*	-42.84
7659.1125	-13	*	*
8510.1250	-13	*	*

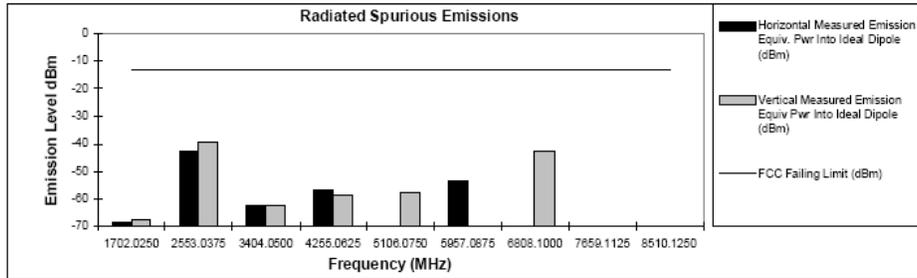


Figure 6H-12: 42 Watts, 851.0125MHz, 25 KHz Channel Spacing

**868.8875 MHz** **Channel Spacing 25kHz | S/N 1MWM570169**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-13	-68.86	-68.25
2606.6625	-13	-39.76	-39.72
3475.5500	-13	-60.66	-59.17
4344.4375	-13	-56.19	-57.70
5213.3250	-13	*	*
6082.2125	-13	*	*
6951.1000	-13	*	*
7819.9875	-13	*	*
8688.8750	-13	*	*

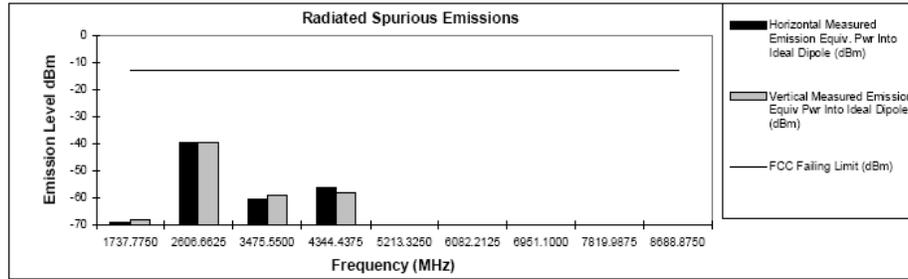


Figure 6H-13: 42 Watts, 868.8875MHz, 25 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (APCO Mode)  
Tx Power: 36 Watts

**764.0875 MHz** **Channel Spacing 12.5kHz | S/N 1MWM570169**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	-70.25	-64.11
2292.2625	-20	-60.91	-61.69
3056.3500	-20	-56.93	-52.34
3820.4375	-20	*	*
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*


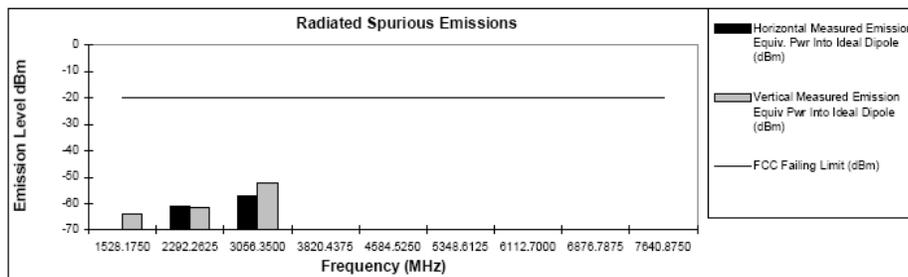


Figure 6H-14: 36 Watts, 764.0875MHz, 12.5 KHz Channel Spacing

**Transmit Radiated Spurious Emissions: APX7500 (APCO Mode)**  
**Tx Power: 2 Watts**

**805.9875 MHz** **Channel Spacing 12.5kHz | S/N 1MWM380019**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1611.9750	-20	*	-70.60
2417.9625	-20	*	*
3223.9500	-20	*	*
4029.9375	-20	*	*
4835.9250	-20	*	*
5641.9125	-20	*	*
6447.9000	-20	*	*
7253.8875	-20	*	*
8059.8750	-20	*	*

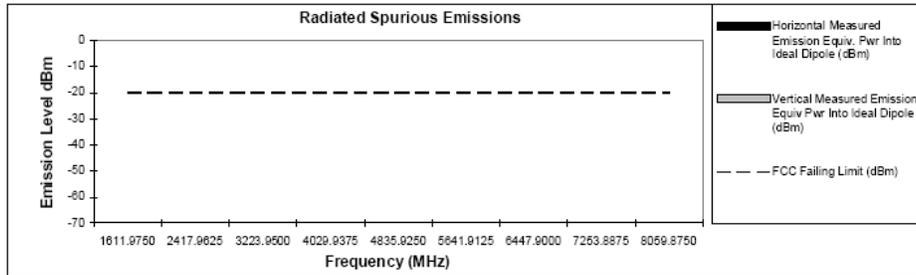


**Figure 6H-15: 2 Watts, 805.9875MHz, 12.5 KHz Channel Spacing**

**Transmit Radiated Spurious Emissions: APX7500 (APCO Mode)**  
**Tx Power: 42 Watts**

**823.9875 MHz** **Channel Spacing 12.5kHz | S/N 1MWM570169**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1647.9750	-20	-70.10	-66.67
2471.9625	-20	-34.03	-34.32
3295.9500	-20	-60.45	-55.98
4119.9375	-20	-54.35	-47.84
4943.9250	-20	*	*
5767.9125	-20	*	*
6591.9000	-20	*	*
7415.8875	-20	*	*
8239.8750	-20	*	*

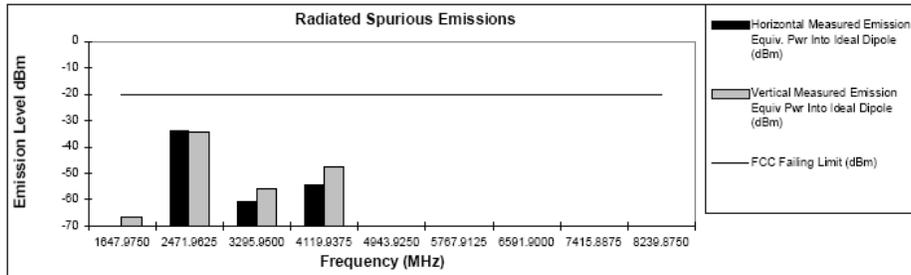

**Figure 6H-16: 42 Watts, 823.9875MHz, 12.5 KHz Channel Spacing**

Transmit Radiated Spurious Emissions: APX7500 (APCO Mode)  
Tx Power: 42 Watts

868.8875 MHz Channel Spacing 12.5kHz | S/N 1MWM570169

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	-62.56	-60.94
2606.6625	-20	-46.39	-46.09
3475.5500	-20	*	*
4344.4375	-20	-58.33	-53.54
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	*	*
8688.8750	-20	*	*

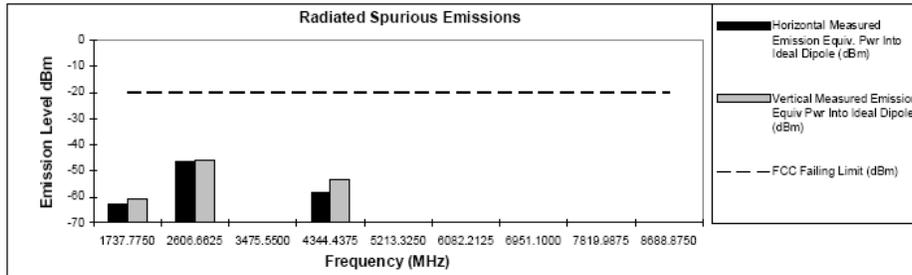


Figure 6H-17: 42 Watts, 868.887575MHz, 12.5 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (F2 Mode)  
Tx Power: 2 Watts

764.0125 MHz Channel Spacing 12.5 KHz | S/N TU098J040W

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.0250	-20	-61.02	-57.41
2292.0375	-20	*	-61.79
3056.0500	-20	-55.70	-42.44
3820.0625	-20	-52.82	*
4584.0750	-20	*	*
5348.0875	-20	*	*
6112.1000	-20	*	*
6876.1125	-20	*	*
7640.1250	-20	*	*

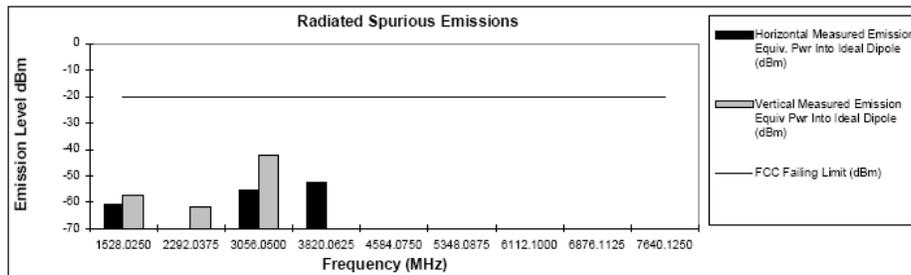


Figure 6H-18: 42 Watts, 764.0125MHz, 12.5 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (F2 Mode)  
Tx Power: 36 Watts

764.0875 MHz Channel Spacing 12.5 KHz | S/N TU098J040W

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	-60.95	-59.60
2292.2625	-20	-63.42	-61.34
3056.3500	-20	-56.27	-40.85
3820.4375	-20	-55.86	-48.85
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*

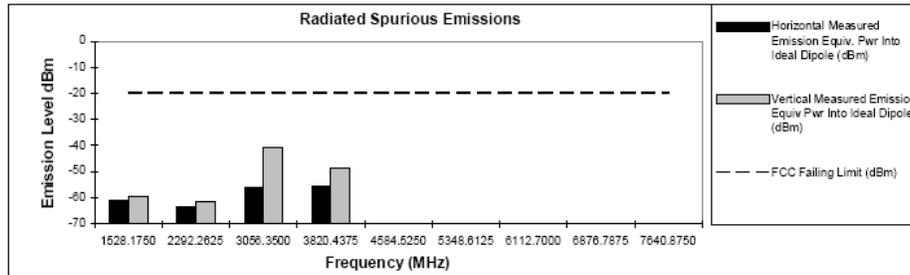


Figure 6H-19: 36 Watts, 764.0875MHz, 12.5 KHz Channel Spacing  
Transmit Radiated Spurious Emissions: APX7500 (F2 Mode)  
Tx Power: 2 Watts

805.9875 MHz Channel Spacing 12.5 KHz | S/N TU098J040W

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1611.9750	-20	-61.42	-61.13
2417.9625	-20	*	*
3223.9500	-20	-60.01	-52.01
4029.9375	-20	*	*
4835.9250	-20	*	*
5641.9125	-20	*	*
6447.9000	-20	*	*
7253.8875	-20	*	*
8059.8750	-20	*	*

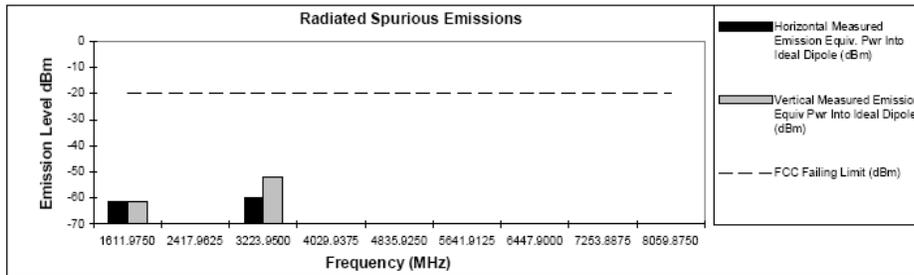


Figure 6H-20: 2 Watts, 805.9875MHz, 12.5 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (F2 Mode)

Tx Power: 42 Watts

823.9875 MHz

Channel Spacing: 12.5 KHz | S/N TU098J040W

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1647.9750	-20	-63.70	-61.42
2471.9625	-20	*	-43.41
3295.9500	-20	-60.66	-51.43
4119.9375	-20	-52.53	-45.85
4943.9250	-20	-46.41	-42.70
5767.9125	-20	*	*
6591.9000	-20	-48.70	*
7415.8875	-20	-50.00	-44.14
8239.8750	-20	-45.02	*

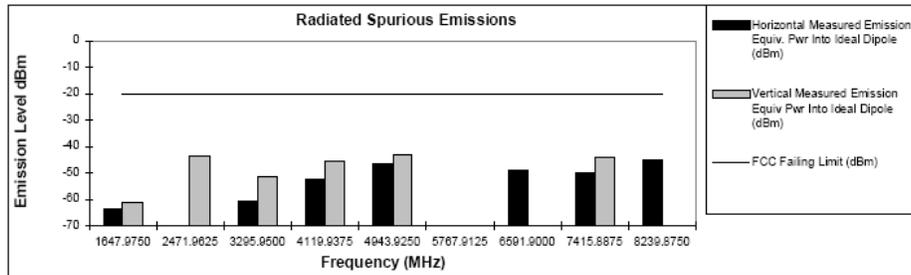


Figure 6H-21: 42 Watts, 823.9875MHz, 12.5 KHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (F2 Mode)

Tx Power: 42 Watts

868.8875 MHz

Channel Spacing: 12.5 KHz | S/N TU098J040W

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	-66.23	-59.52
2606.6625	-20	-60.31	-51.94
3475.5500	-20	*	*
4344.4375	-20	-50.02	-39.00
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	-44.46	*
8688.8750	-20	*	*

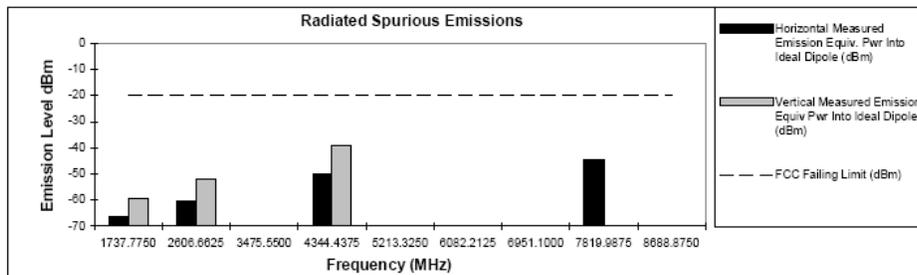


Figure 6H-22: 42 Watts, 868.8875MHz, 12.5 KHz Channel Spacing

<b>GNSS Testing</b>				
<b>ADD +2.15 dB for EIRP</b>				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: Quarter Wave (HAF4016A)</u>		
Tx Freq.	<u>794.0875</u>			
		<b>Peak Radiated</b>	<b>Peak Radiated</b>	<b>Peak Radiated</b>
		<b>Spurious Emissions:</b>	<b>Spurious Emissions:</b>	<b>Spurious Emissions:</b>
		<b>Analog Mode</b>	<b>APCO Mode</b>	<b>F2 Mode</b>
		<b>(dBm)</b>	<b>(dBm)</b>	<b>(dBm)</b>
Spur	Frequency			
	MHz			
2XFund	1588.1750	-58.54	-59.44	-56.84
Notes: <u>ANT: Quarter Wave (HAF4016A)</u>				
Tx Freq.	<u>805.9125</u>			
		<b>Peak Radiated</b>	<b>Peak Radiated</b>	<b>Peak Radiated</b>
		<b>Spurious Emissions:</b>	<b>Spurious Emissions:</b>	<b>Spurious Emissions:</b>
		<b>Analog Mode</b>	<b>APCO Mode</b>	<b>F2 Mode</b>
		<b>(dBm)</b>	<b>(dBm)</b>	<b>(dBm)</b>
Spur	Frequency			
	MHz			
2XFund	1611.8250	-59.84	-59.44	-58.14

Note 1: The reported emissions are wideband (>700Hz) spurs.

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: Elevated 3 dB (HAF4014A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-68.29	-67.89	-66.59
Tx Freq.		Notes: <u>ANT: Elevated 3 dB (HAF4014A)</u>		
	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-67.34	-66.94	-65.64

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Low Profile (HAF4013A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-54.94	-54.54	-53.24
Tx Freq.		Notes: <u>ANT: 3 dB Low Profile (HAF4013A)</u>		
	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-56.59	-56.19	-54.89

Note 1: The reported emissions are wideband (>700Hz) spurs.

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Collinear (HAF4015A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-56.54	-56.14	-54.84
Tx Freq.		Notes: <u>ANT: 3 dB Collinear (HAF4015A)</u>		
	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-58.34	-57.94	-56.64

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Low-Profile (HAF4018A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-57.44	-57.04	-55.74
Tx Freq.		Notes: <u>ANT: 3 dB Low-Profile (HAF4018A)</u>		
	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-59.24	-58.84	-57.54

Note 1: The reported emissions are wideband (>700Hz) spurs.

**EXHIBIT 6J**  
**Frequency Stability - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)**

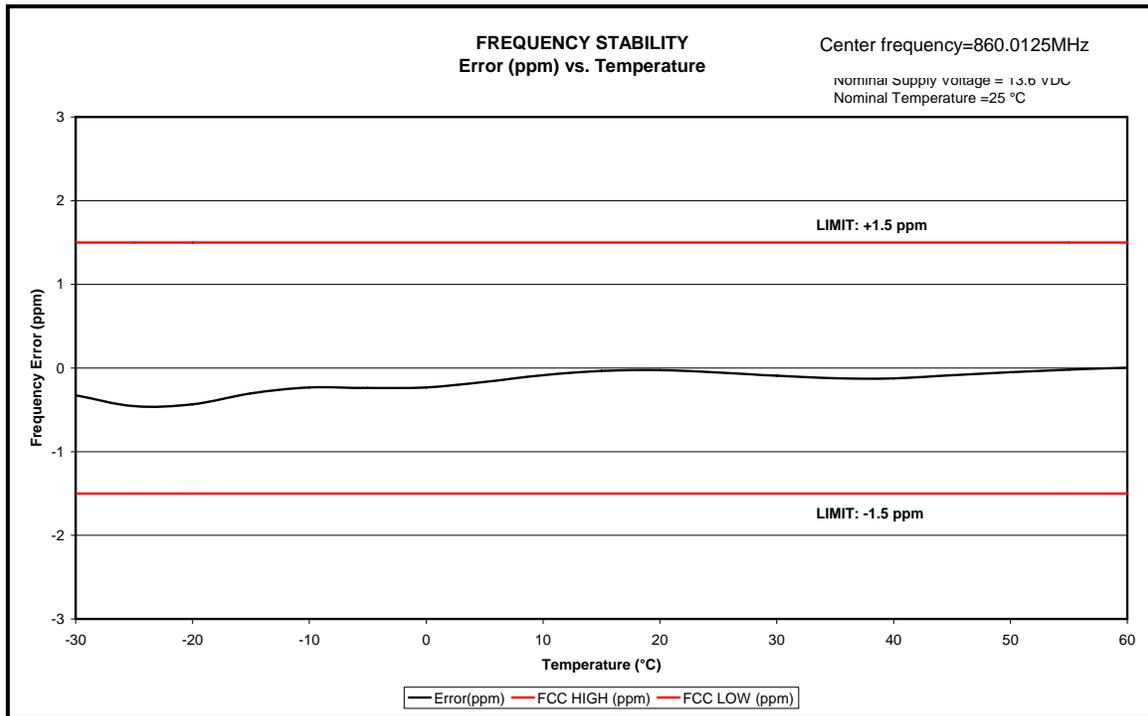
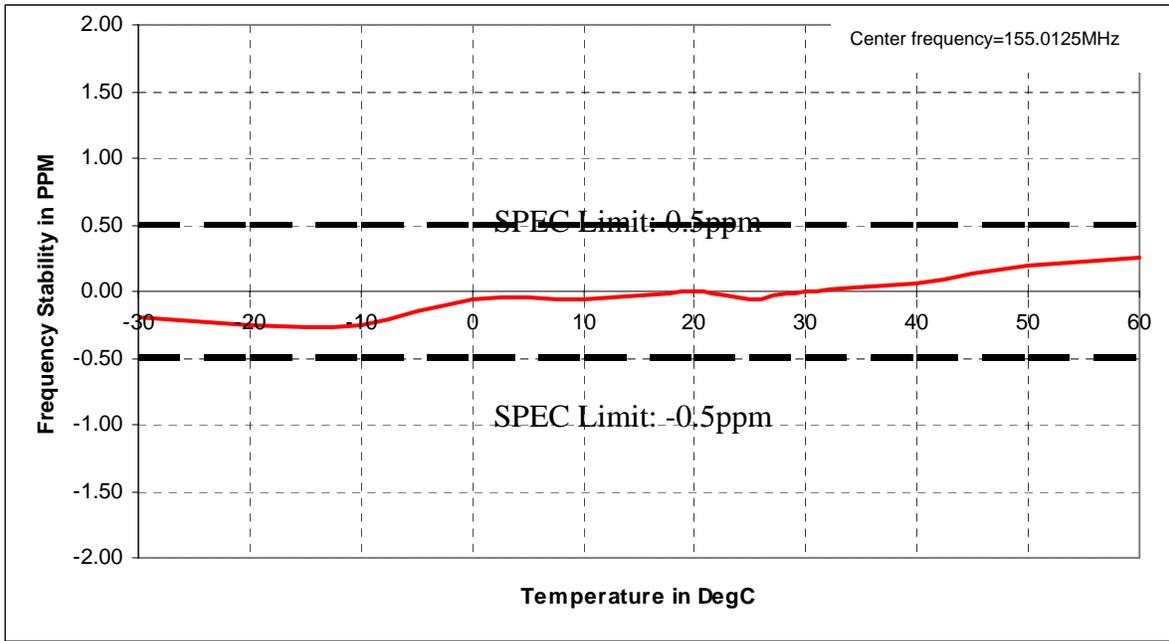


EXHIBIT 6J-1

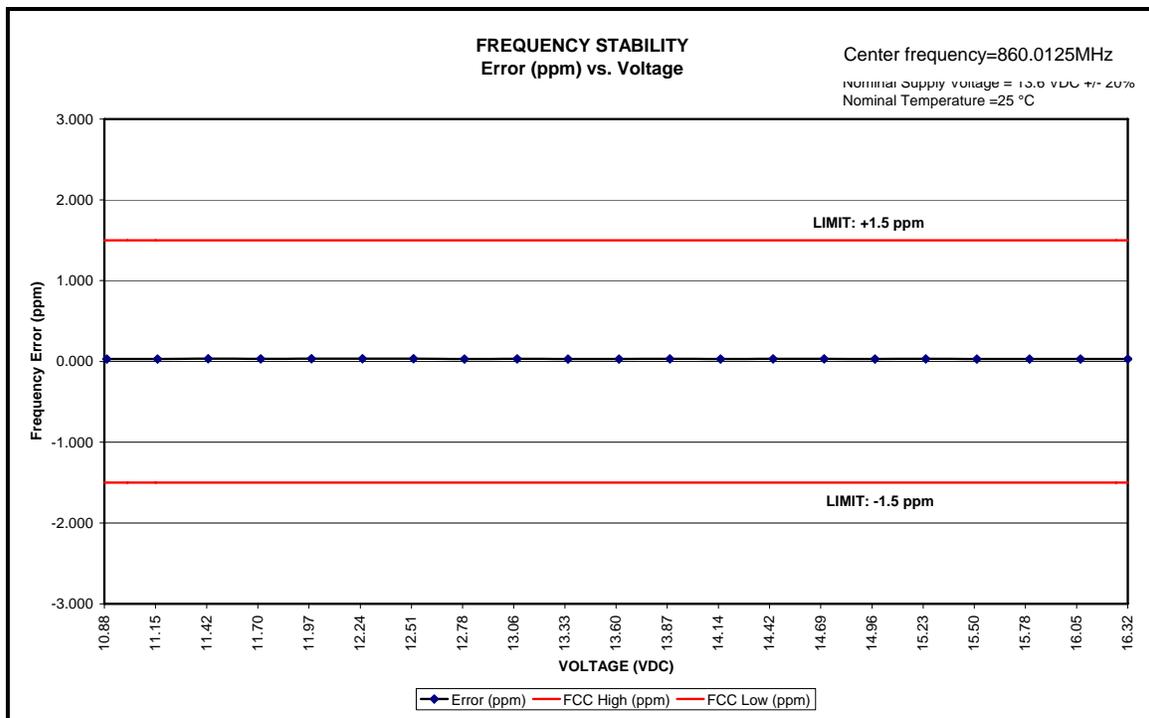
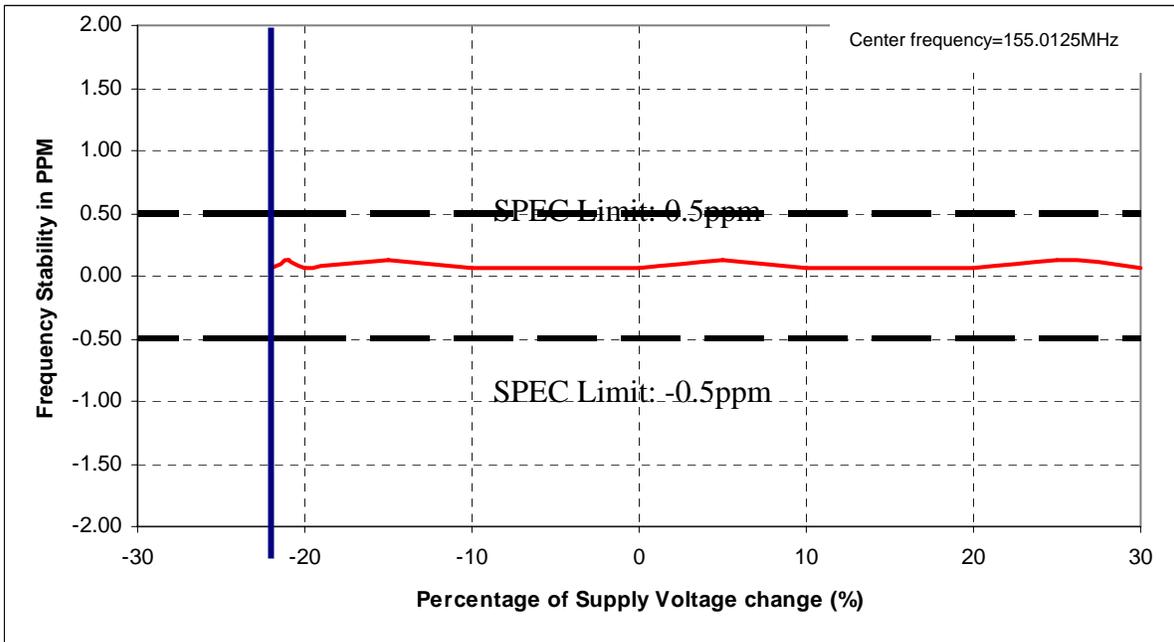


EXHIBIT 6J-2

### Analog Mode

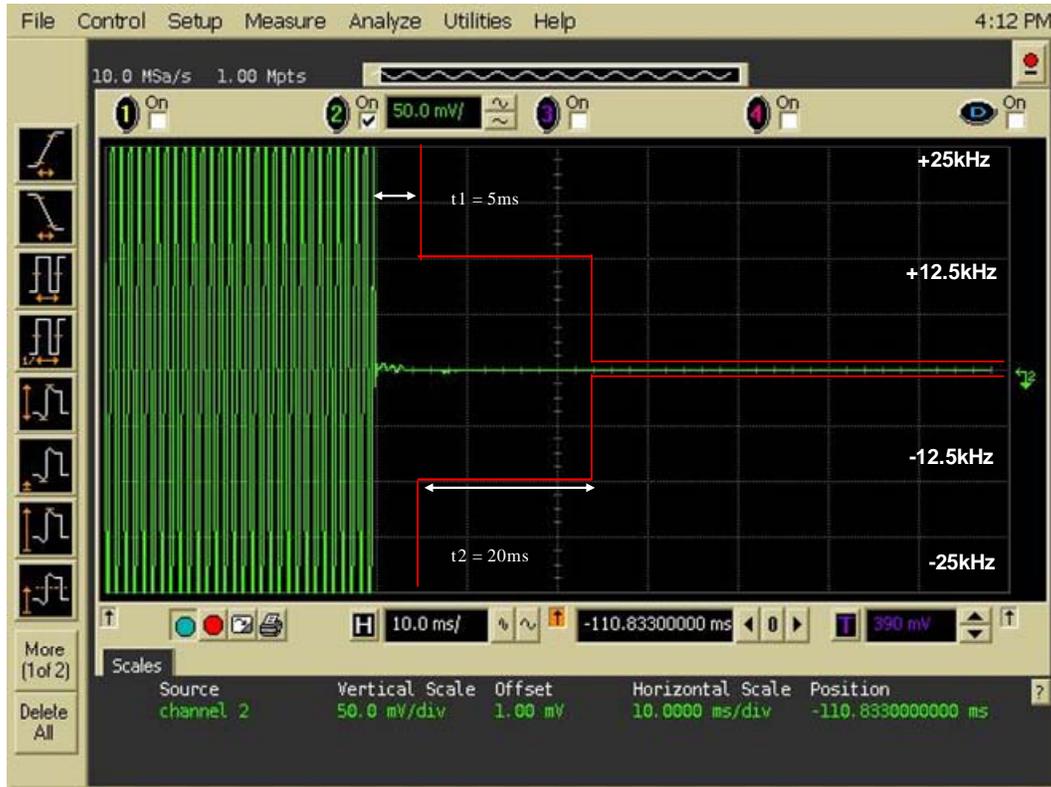


Figure 6K-1: Transient Frequency Behavior, 155.0125MHz, 25 KHz Channel Spacing, Key up Transient



Figure 6K-2: Transient Frequency Behavior, 155.0125MHz, 25 KHz Channel Spacing, De- Key Transient

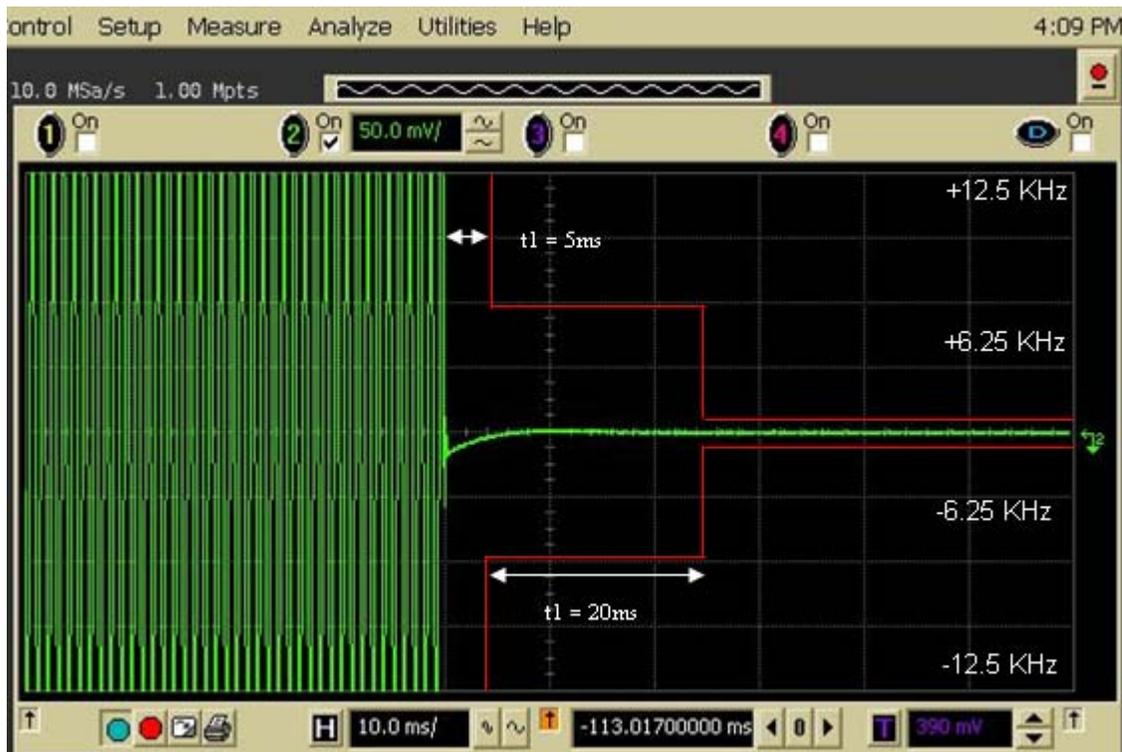


Figure 6K-3: Transient Frequency Behavior, 155.0125MHz, 12.5 KHz Channel Spacing, Key Up Transient

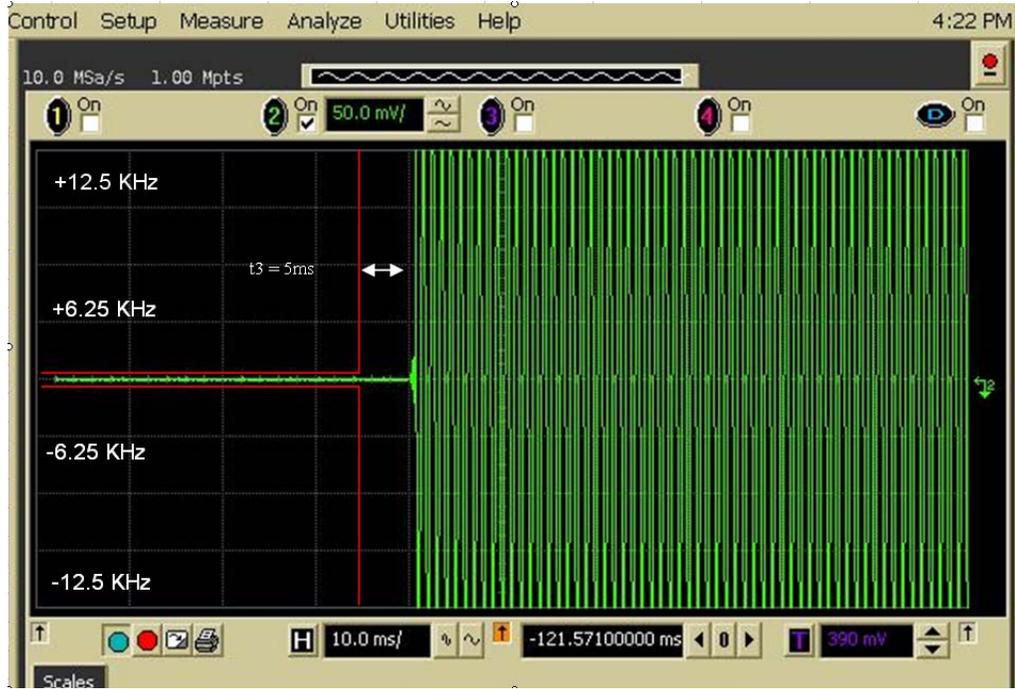


Figure 6K-4: Transient Frequency Behavior, 155.0125MHz, 12.5 KHz Channel Spacing, De-Key Transient