

EXHIBIT 6**INDEX OF SUBMITTED MEASURED DATA**

<u>MEASUREMENT</u>	<u>EXHIBIT</u>	<u>NUMBER OF PAGES</u>
I RF Power Output Data	6A	2
II Audio Response & Low Pass Filter Response	6B 6C	4 7
III Modulation Limiting	6D	9
IV Occupied Bandwidth	6E	12
V Conducted Spurious Emissions	6F	22
VI Radiated Spurious Emissions	6G	45
VII Frequency Stability		
A. Temperature	6H -1	67
B. Supply Voltage	6H -1	68
VII Transient Frequency Behavior	6I	70
IX Adjacent Channel Coupled Power Ratio	6J	72
X 1559-1610 Emission (GNSS)	6K	75

* The test data is re-used and taken from FCC ID: AZ492FT4897 and AZ492FT5858 except radiated spurious emissions. Radiated spurious emissions data is taken on the actual FCC ID: AZ492FT7048.

EXHIBIT 6A**RF Conducted Power Output Data** -- Pursuant 47 CFR 2.1046(a), 2.1033(c) (6), 2.1033(c) (7) and 2.1033(c) (8)

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device.

Frequency = 380.0125 MHz:

Output RF power	120 Watts
DC Voltage	13.4 Volts
DC Current	21.67 Amps

Frequency = 380.0125 MHz:

Output RF power	25 Watts
DC Voltage	13.4 Volts
DC Current	9.30 Amps

Frequency = 406.2 MHz:

Output RF power	120 Watts
DC Voltage	13.4 Volts
DC Current	19.54 Amps

Frequency = 406.2 MHz:

Output RF power	25 Watts
DC Voltage	13.4 Volts
DC Current	8.25 Amps

Frequency = 425.0125MHz:

Output RF power	120 Watts
DC Voltage	13.4 Volts
DC Current	20.23 Amps

Frequency = 425.0125MHz:

Output RF power	25 Watts
DC Voltage	13.4 Volts
DC Current	8.46 Amps

Frequency = 469.9875MHz:

Output RF power	120 Watts
DC Voltage	13.4 Volts
DC Current	22.16 Amps

Frequency = 469.9875MHz:

Output RF power	25 Watts
DC Voltage	13.4 Volts
DC Current	9.87 Amps

Frequency =764.0125 MHz:

Output RF power	2 Watts
DC Voltage	13.6 Volts
DC Current	1.9 A

Frequency =764.0875 MHz:

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.4 A

Output RF power	18 Watts
DC Voltage	13.6 Volts
DC Current	5.35 A

Output RF power	36 Watts
DC Voltage	13.6 Volts
DC Current	7.94 A

Frequency =823.9875 MHz:

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.52 A

Output RF power	21 Watts
DC Voltage	13.6 Volts
DC Current	5.9 A

Output RF power	42 Watts
DC Voltage	13.6 Volts
DC Current	8.95 A

Frequency =868.9875 MHz:

Output RF power	3.5 Watts
DC Voltage	13.6 Volts
DC Current	2.22 A

Output RF power	21 Watts
DC Voltage	13.6 Volts
DC Current	5.15 A

Output RF power	42 Watts
DC Voltage	13.6 Volts
DC Current	7.8 A

EXHIBIT 6B

Transmit Audio Response -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

Audio Frequency Response
(Freq: 425.0125MHz, ChSp: 12.5 kHz)

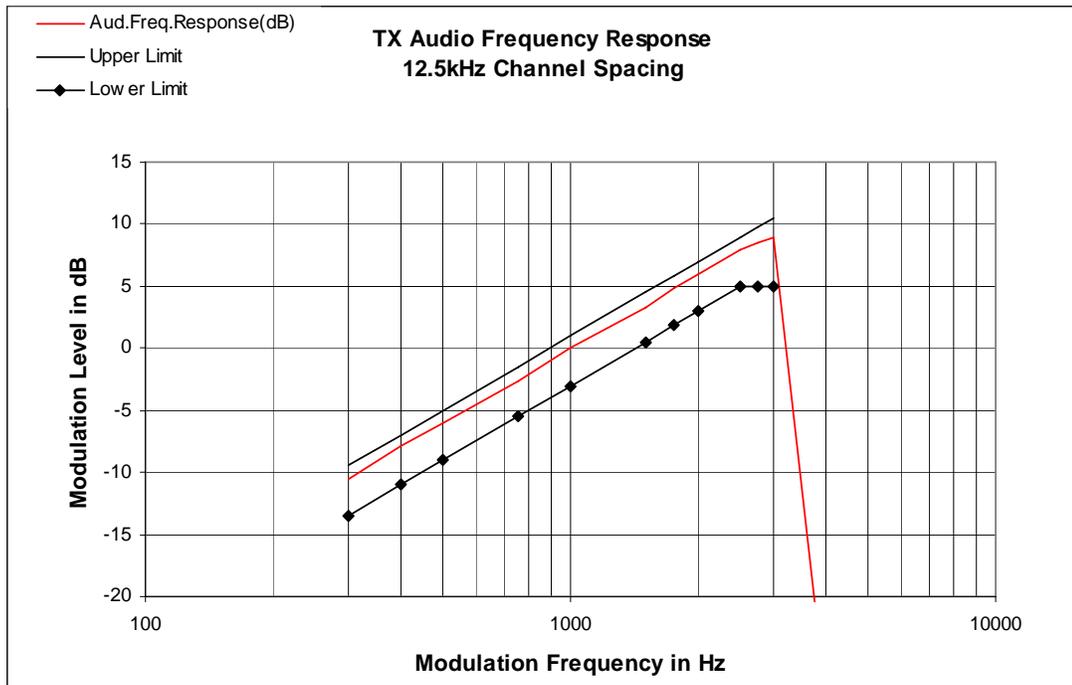


Figure 6B-1: 12.5 kHz Channel Spacing, 425.0125 MHz

Audio Frequency Response
(Freq: 425.0125MHz, ChSp: 25 kHz)

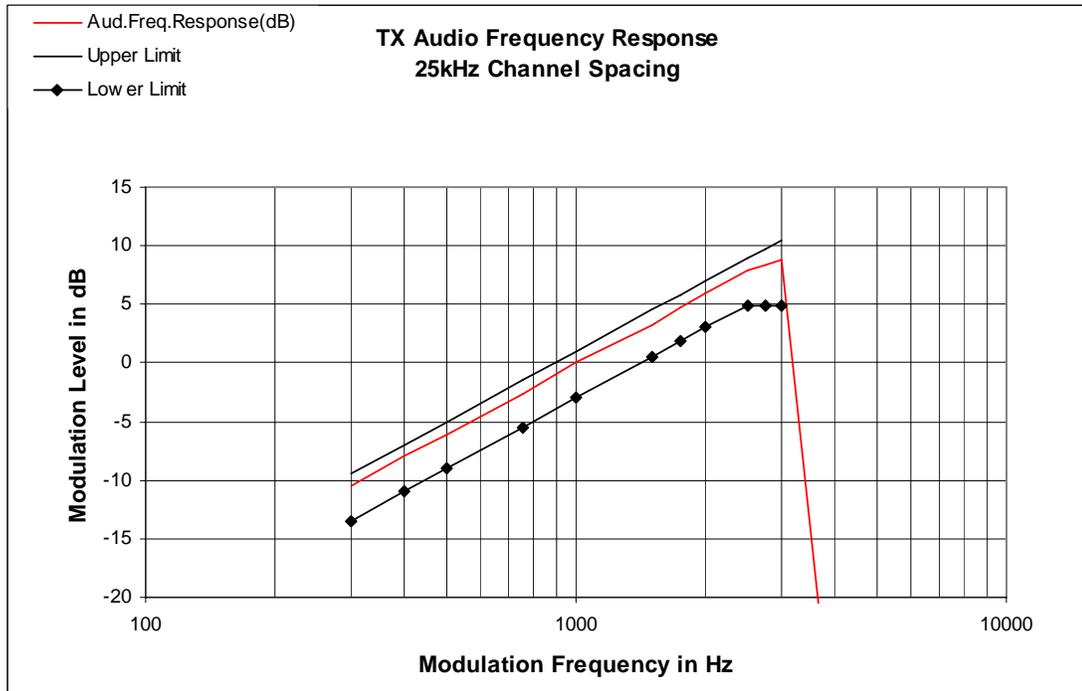


Figure 6B-2: 25 kHz Channel Spacing, 425.0125 MHz (Not for FCC Review)

Audio Frequency Response
(Freq: 860.0125MHz, ChSp: 12.5 kHz)

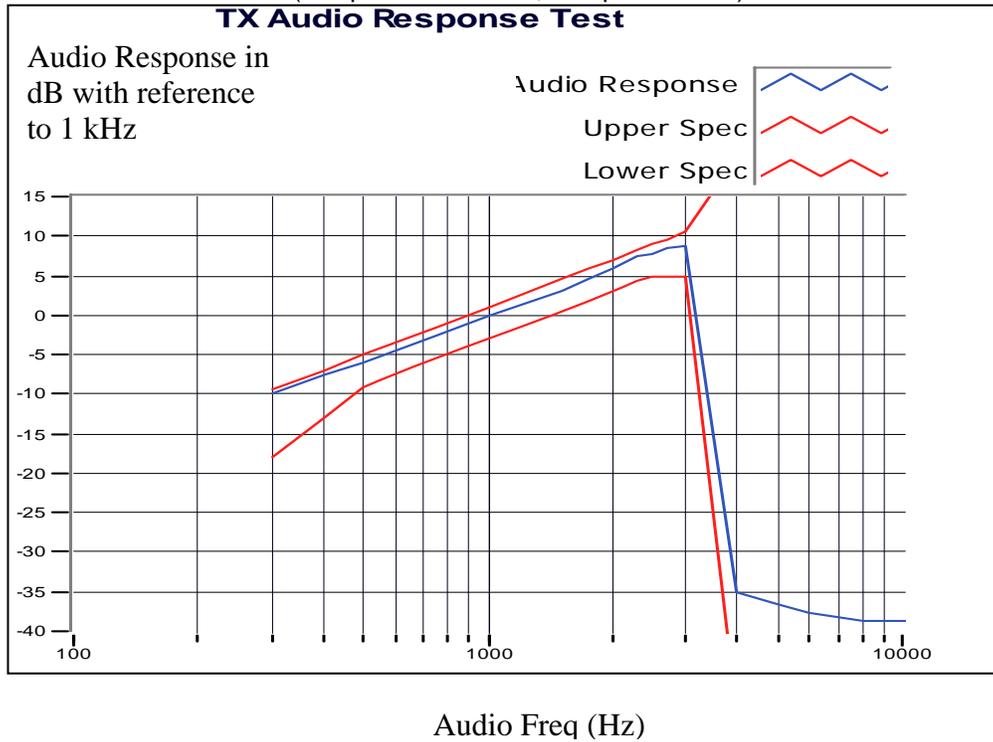


Figure 6B-3: 12.5 kHz Channel Spacing, 860.0125MHz

Audio Frequency Response
(Freq: 860.0125MHz, ChSp: 25 kHz)



TX Audio Response Test

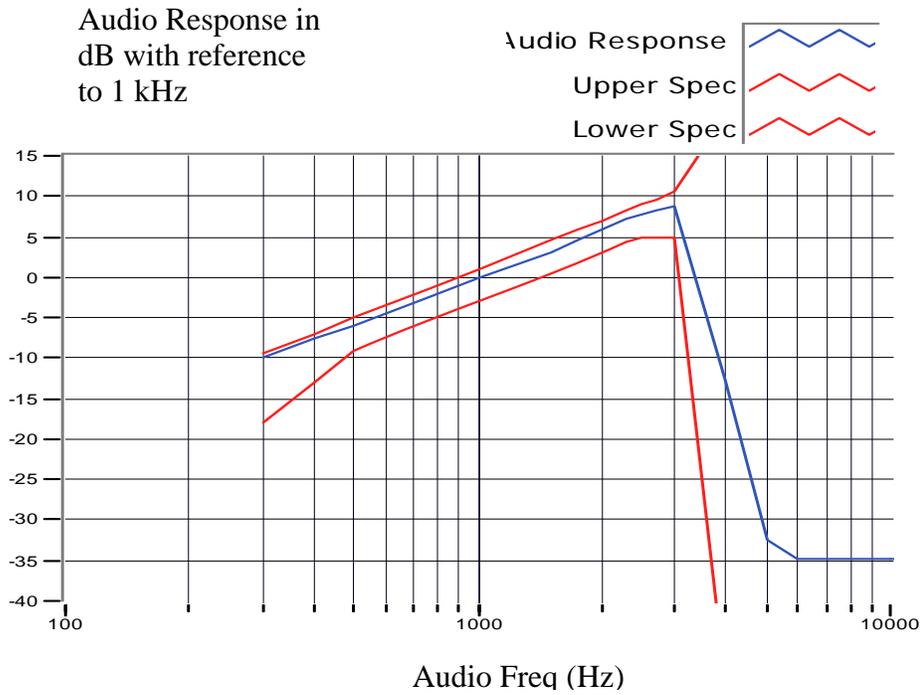


Figure 6B-4: 25 kHz Channel Spacing, 860.0125MHz

EXHIBIT 6C

Audio Low Pass Filter Response -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

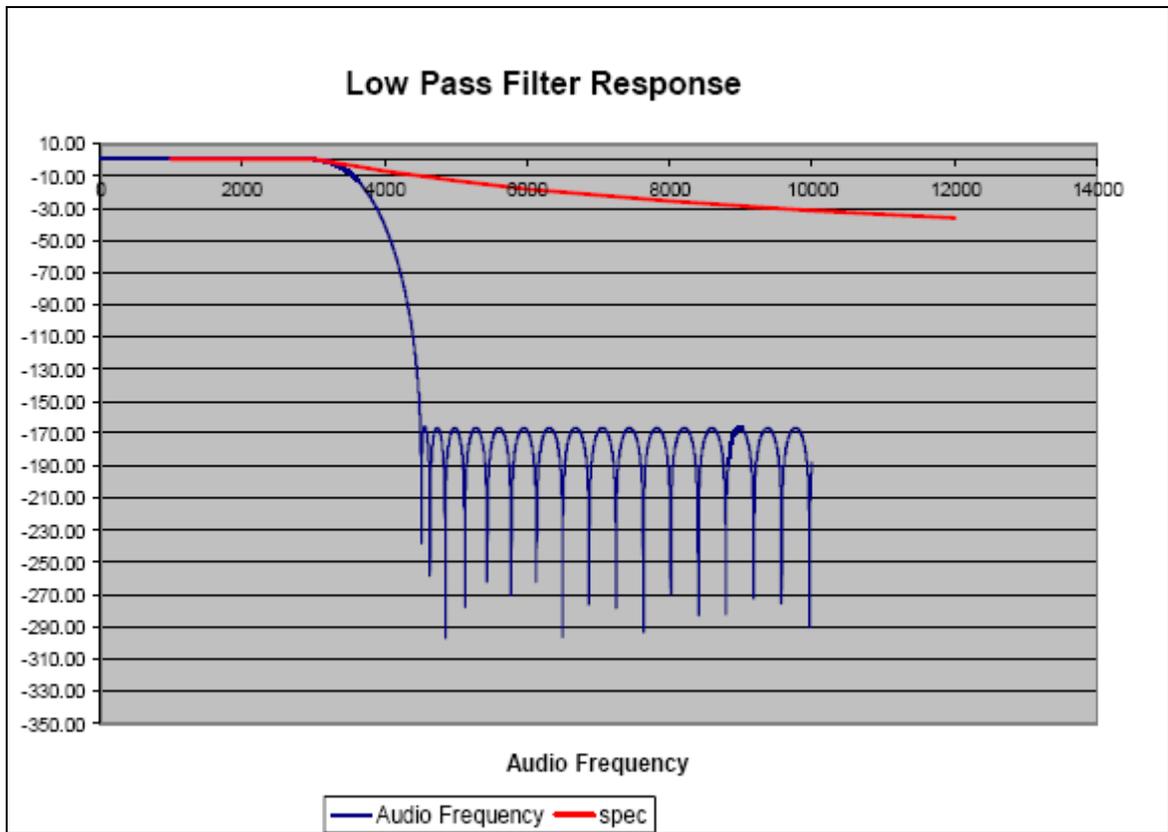


Figure 6C-1: 425.0125MHz, Transmit Audio Low Pass Filter Response

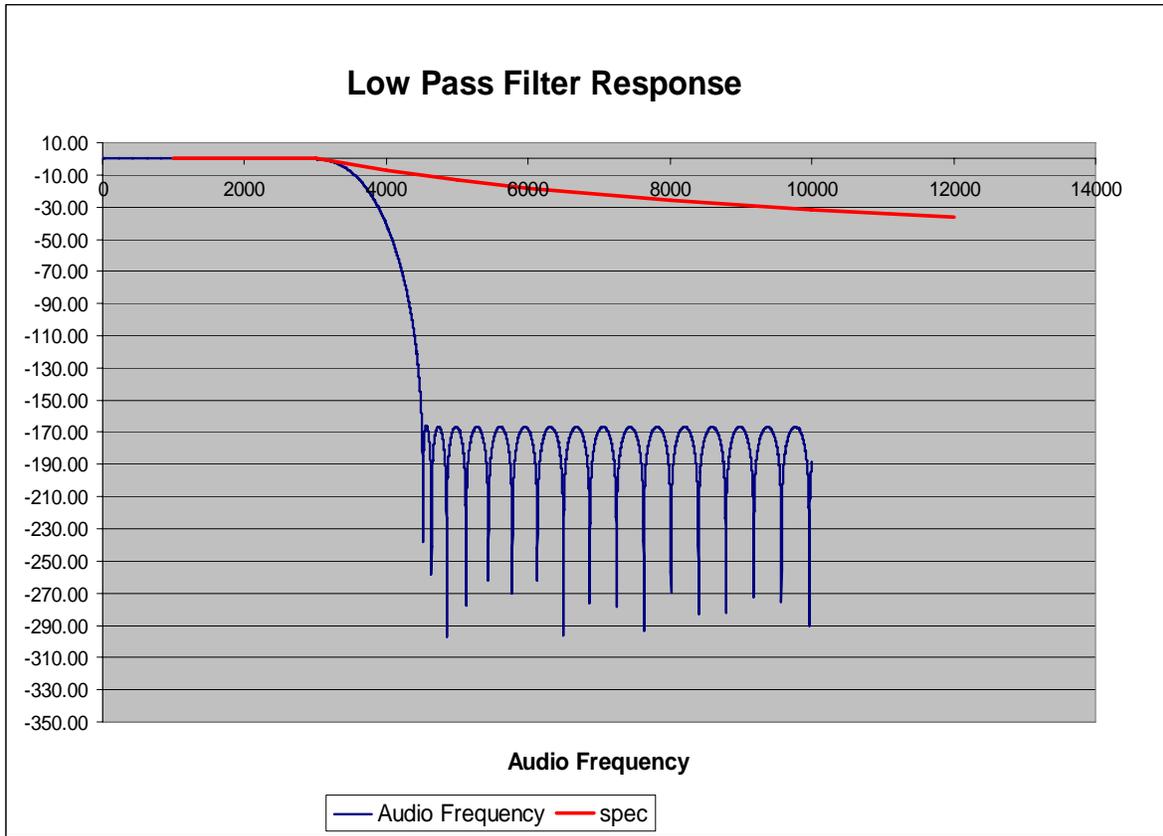


Figure 6C-2: 860.0125MHz, Transmit Audio Low Pass Filter Response

EXHIBIT 6D

Modulation Limiting -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

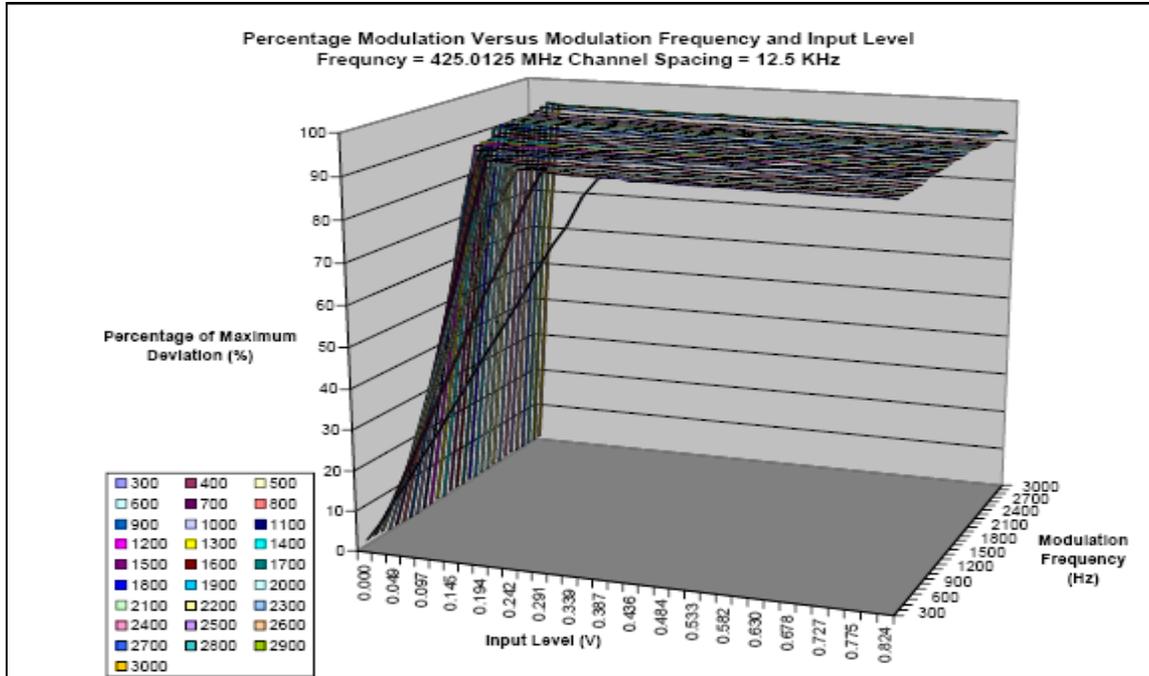


Figure 6D-1: The Percentage of Max. Deviation on the “Z” axis is referenced to 2.5 kHz for 12.5 kHz bandwidth

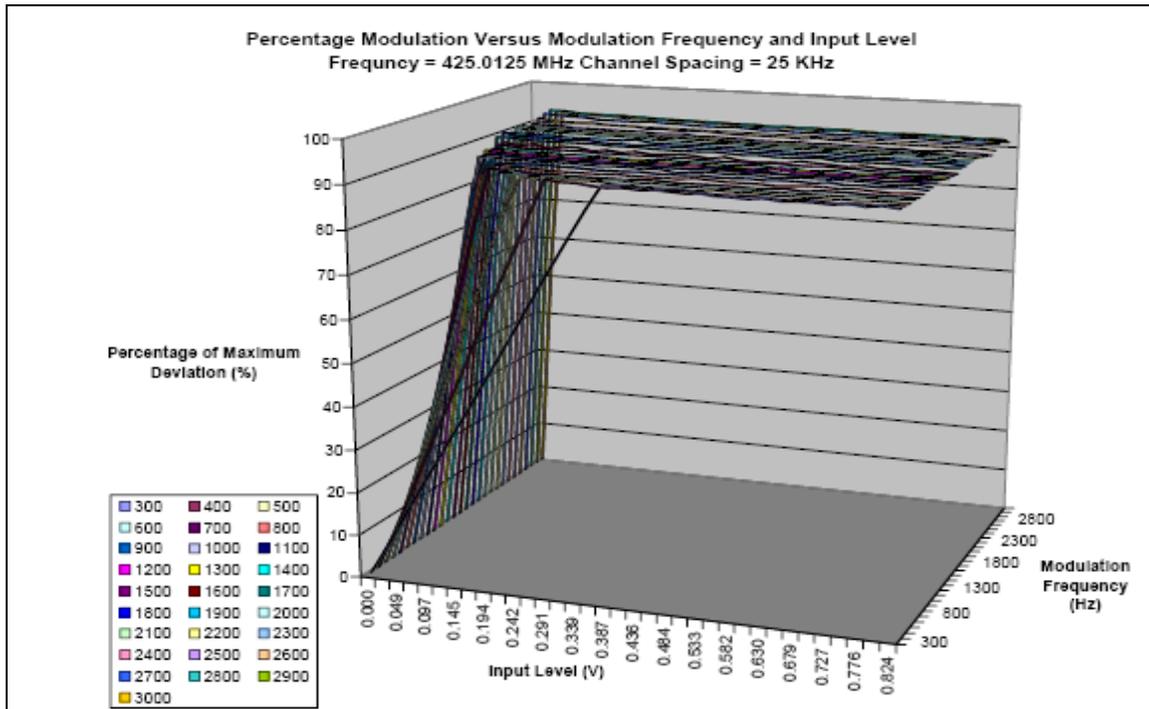


Figure 6D-2: The Percentage of Max. Deviation on the “Z” axis is referenced to 5.0 kHz for 25 kHz bandwidth (Not for FCC Review)

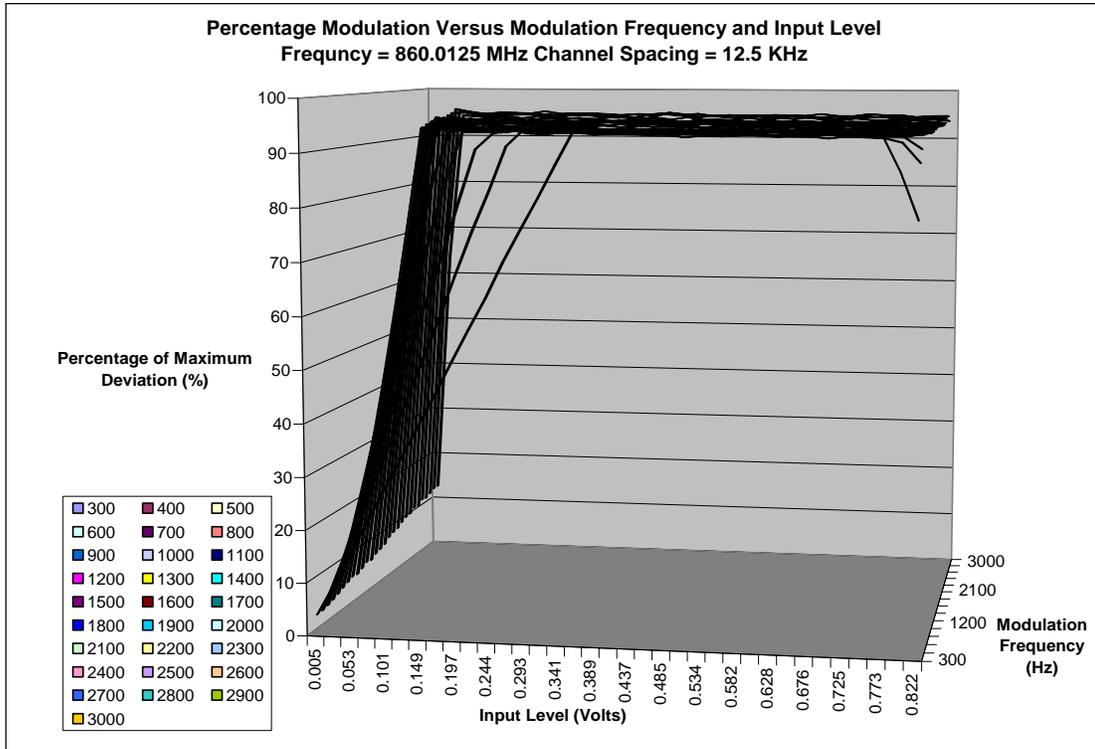


Figure 6D-3: The Percentage of Max. Deviation on the “Z” axis is referenced to 2.5 kHz for 12.5 kHz bandwidth

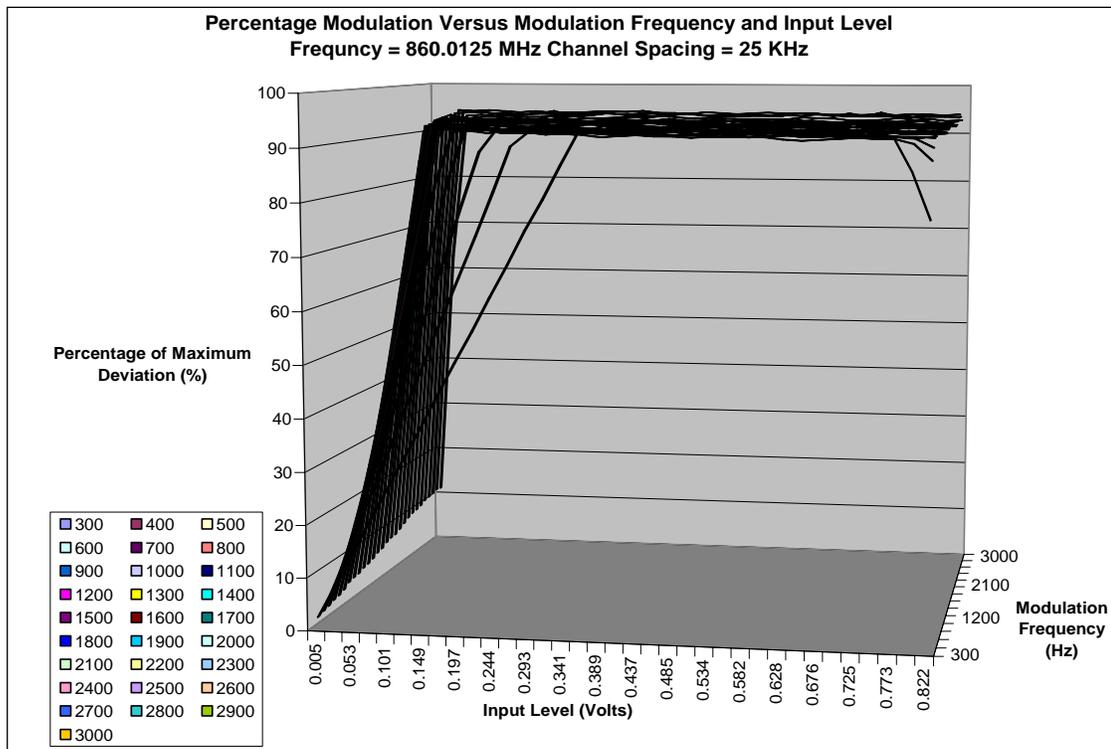


Figure 6D-4: The Percentage of Max. Deviation on the “Z” axis is referenced to 5.0 kHz for 25 kHz bandwidth

EXHIBIT 6E

Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

Carson's Rule for FM modulation is utilized to compute the bandwidth shown in the FCC emission designator. Carson's Rule is: $BW = 2 * (M + D)$ where:

BW = Bandwidth

M= Maximum modulating frequency
D = Deviation

EXHIBIT 6E-1

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \Rightarrow 11K0$
F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

EXHIBIT 6E-2

Standard Audio Modulation (25 kHz Channelization, Analog Voice):

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} \Rightarrow 16K0$
F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E.

EXHIBIT 6E-3

Digital (12.5 kHz Channelization, Digital Data):

Emission Designator 8K10F1D

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1D portion of the designator indicates digital data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 8K10F1D.

EXHIBIT 6E-4

Digital (12.5 kHz Channelization, Digital Voice):

Emission Designator 8K10F1E

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 12.5 kHz channelization digital voice is 8K10F1E.

EXHIBIT 6E-5

Digital (12.5 kHz Channelization, Digital TDMA):

Emission Designator 8K10F1W

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1W portion of the designator indicates digital TDMA.

Therefore, the entire designator for 12.5 kHz channelization digital TDMA is 8K10F1W.

EXHIBIT 6E-6

Digital Modulation (20 kHz Channelization, Digital Voice with encryption):

Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6 kHz with a 4 kHz deviation.

$$BW = 2(M+D) = 2*(6 \text{ kHz} + 4 \text{ kHz}) = 20 \text{ kHz} \Rightarrow 20K0$$

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20 kHz channelization analog voice is 20K0F1E.

EXHIBIT 6E-7

Securenet Mode (20.0 kHz Channelization, Analog Voice with Encryption):

Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6.0 kHz with a 4.0 kHz deviation.

$$BW = 2(M+D) = 2*(6.0 \text{ kHz} + 4.0 \text{ kHz}) = 20 \text{ kHz} \Rightarrow 20K0$$

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20.0 kHz channelization securenet mode (analog voice with encryption) is 20K0F1E.

Note: The 90.203(j) efficiency standard for "F1D" emission is met by sending 2 bits at a time, at a rate of 4800 symbols/second. This yields 9600 bits/second, which is achieved using the modulation technique described in the note below. Modulation results from one of the digital 4-level standard symbol patterns applied to the modulation at a rate of 9600 bits/second. The modulation technique is 4-level FM. The information bits are commonly represented by a symbol that corresponds to one of 4 levels of FM deviation according to the following table.

<u>Information Bits</u>	<u>Symbol</u>	<u>C4FM Deviation</u>
01	+3	+1.8 kHz
00	+1	+0.6 kHz
10	-1	-0.6 kHz
11	-3	-1.8 kHz

For example, an 8-bit binary pattern of 0010 1101 would be sent as symbols +1, -1, -3, +3, which would cause a modulation signal (Frequency-Shift-Keyed) of +1.8 kHz, -600 Hz, -1.8 kHz, and +1.8 kHz. This results in 9600 bits/second of information being sent on a 12.5 kHz channel, which is the equivalent of 4800 bits/second per 6.25 kHz.

Note: The "F1D", "F1E" and "F1W" signal parameters are described as follows: The modulation is 4-level FSK with +/-600 Hz and +/-1.8 kHz shifting (+/-600 Hz and +/-1.8 kHz are the 4 distinct levels of signals). The digital voice test pattern is created by a 2500 Hz sine wave modulated at a level that is 16 dB above that required to produce 50% deviation at the radio output. The digital data test signal is generated by an internally generated pseudo random test pattern based on ITU-T 0.153 (formally CCITT V.52).

Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

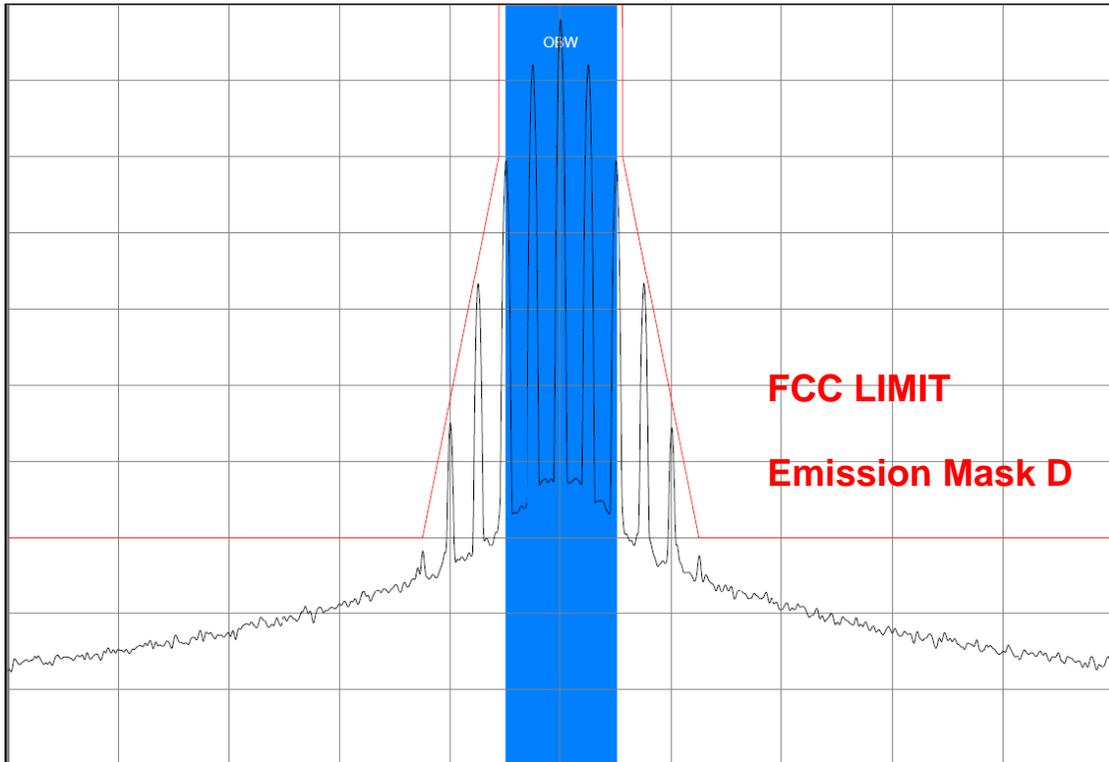


Figure 6E-1: 12.5 kHz Channel Spacing, 425.0125 MHz, Analog Voice, Mask D 11K0F3E

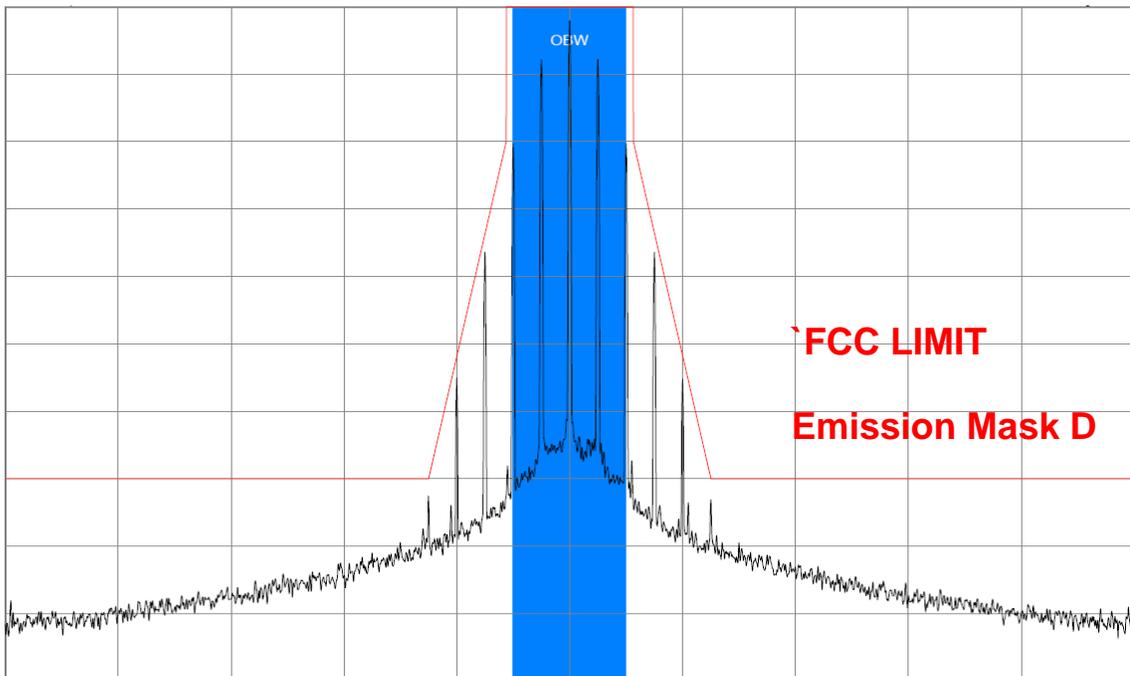


Figure 6E-2: 12.5 kHz Channel Spacing, 860.0125 MHz, Analog Voice, 11K0F3E

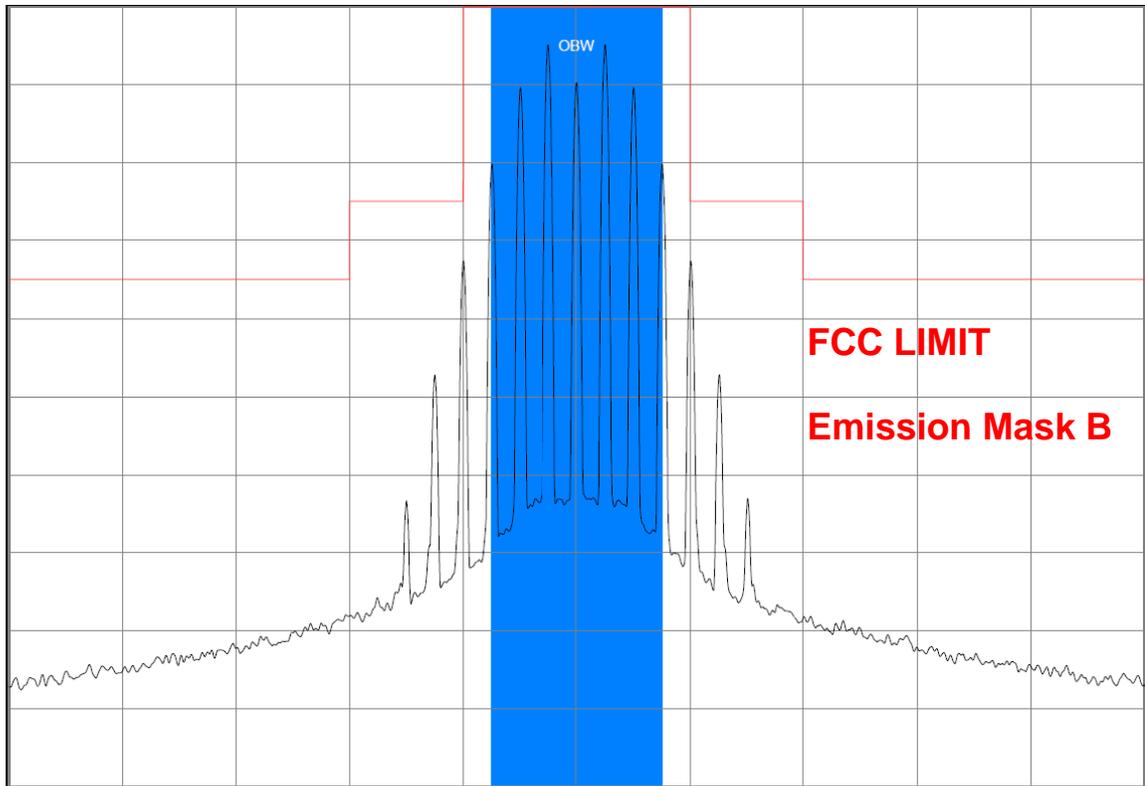


Figure 6E-3: 25.0 kHz Channel Spacing, 425.0125 MHz, Analog Voice, Mask B 16KOF3E

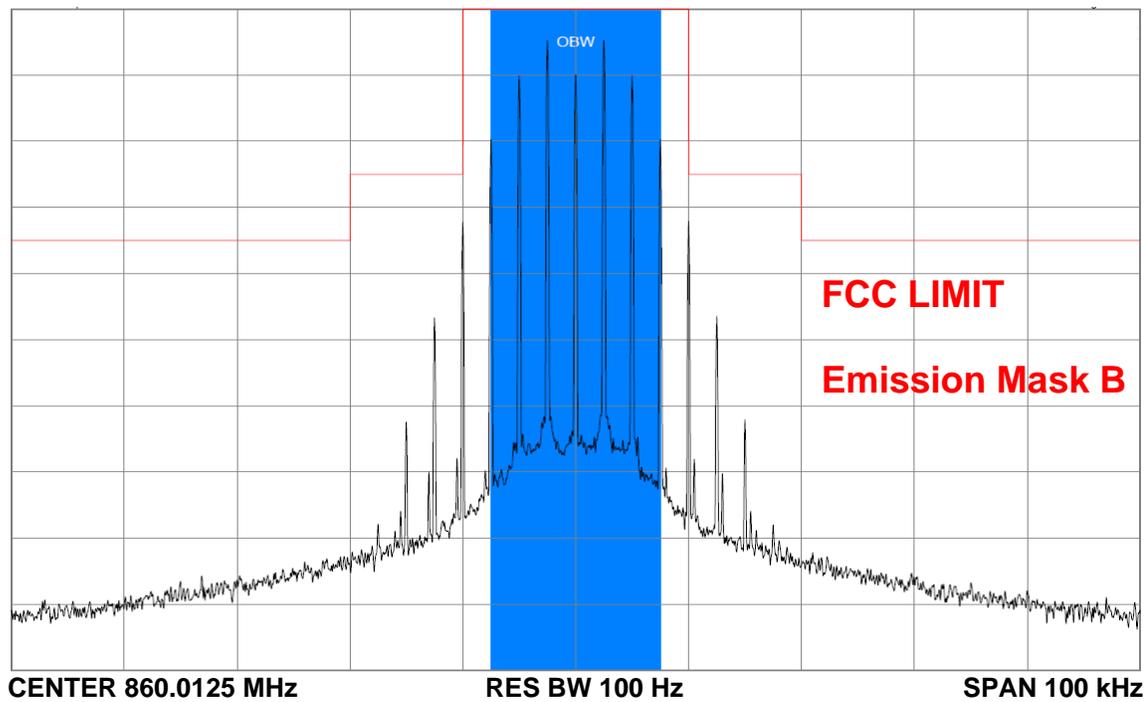


Figure 6E-4: 25.0 kHz Channel Spacing, 860.0125 MHz, Analog Voice, Mask B 16KOF3E

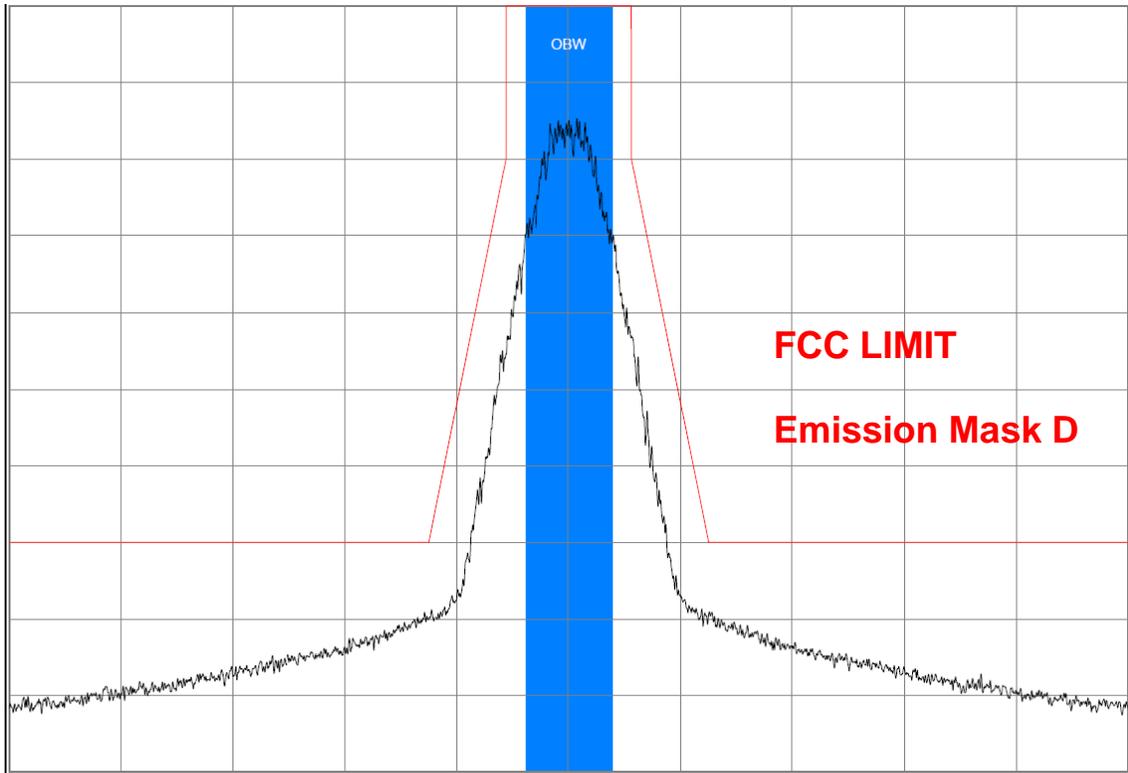


Figure 6E-5: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Data, Mask D 8K10F1D

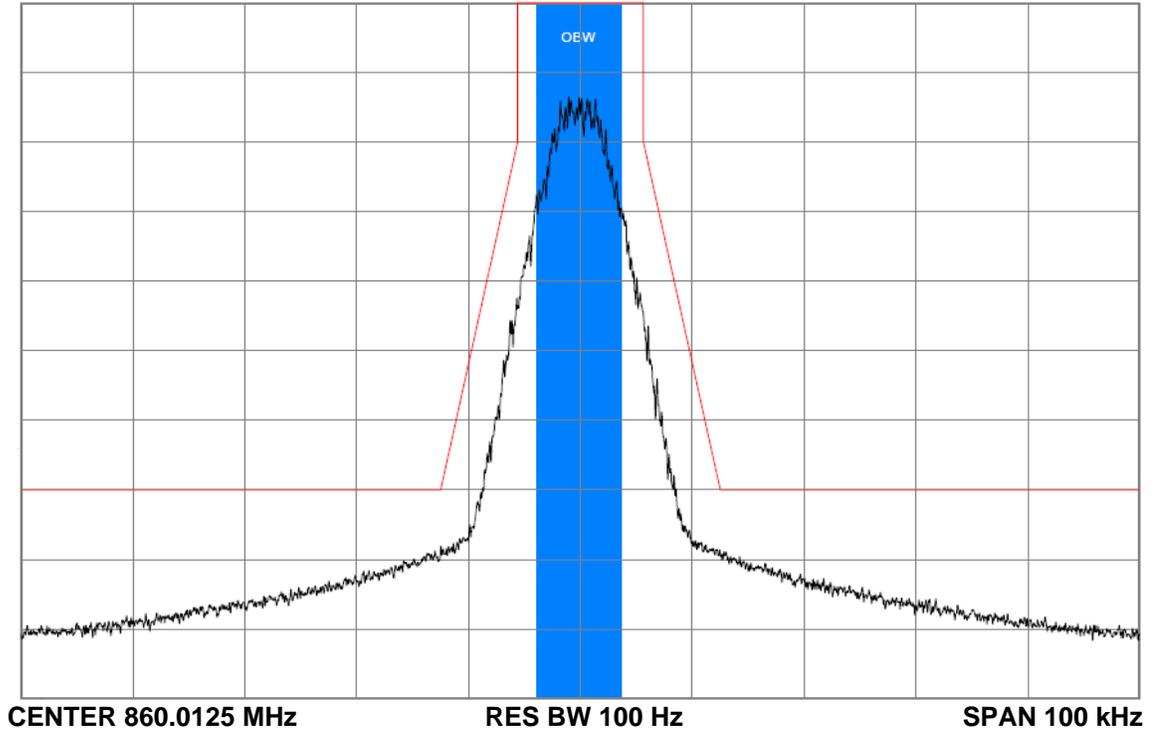


Figure 6E-6: 12.5 kHz Channel Spacing, 860.0125 MHz, Digital Data, Mask D 8K10F1D

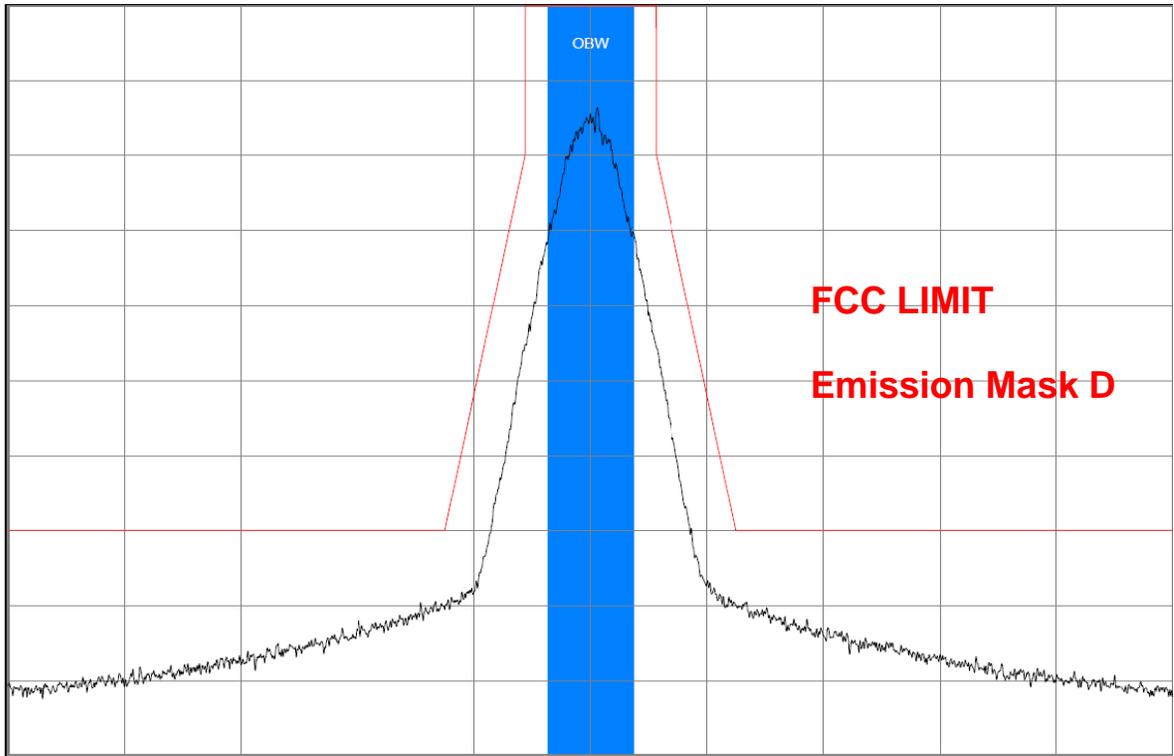


Figure 6E-7: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Voice, Mask D 8K10F1E

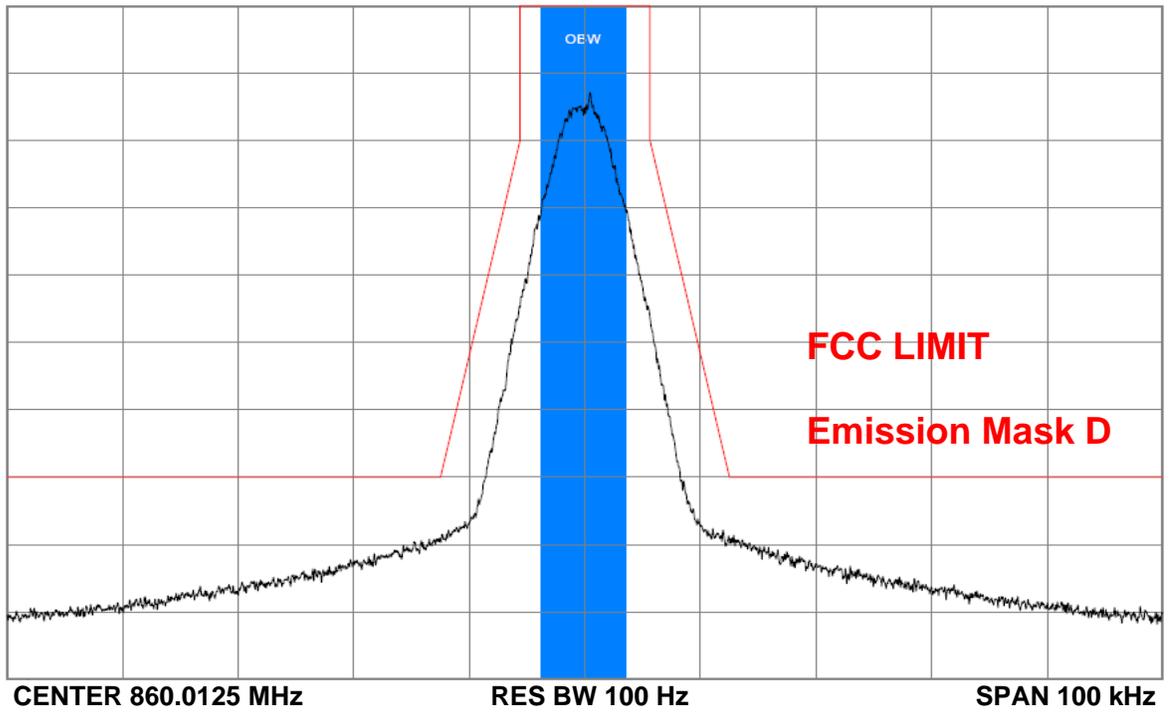


Figure 6E-8: 12.5 kHz Channel Spacing, 860.0125 MHz, Digital Voice, Mask D 8K10F1E

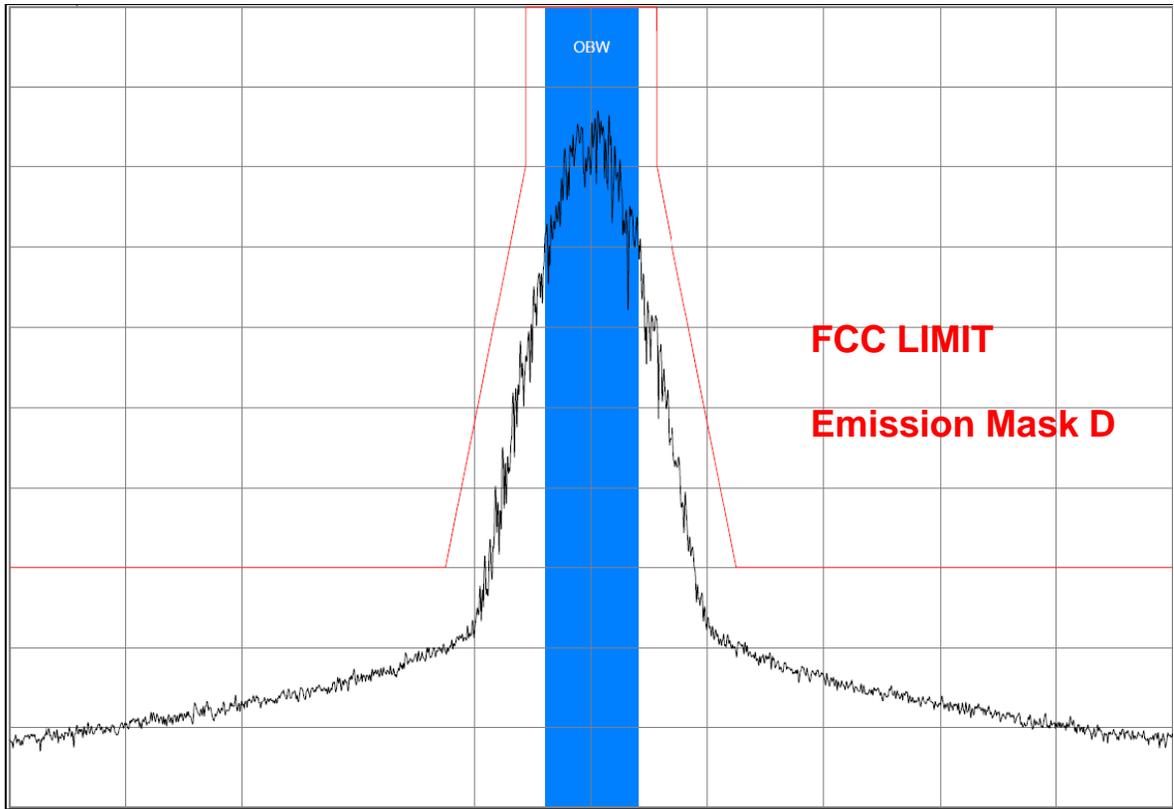


Figure 6E-9: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital TDMA, Mask D 8K10F1W

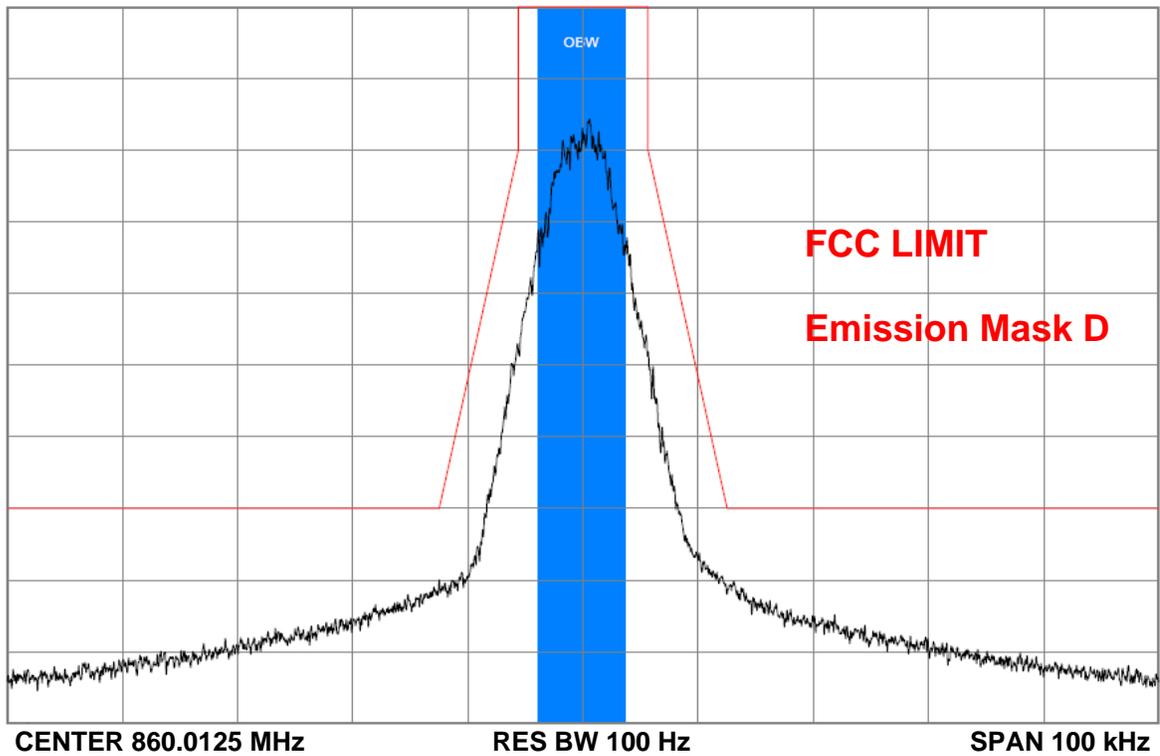


Figure 6E-10: 12.5 kHz Channel Spacing, 860.0125 MHz, Digital TDMA, MASK D 8K10F1W

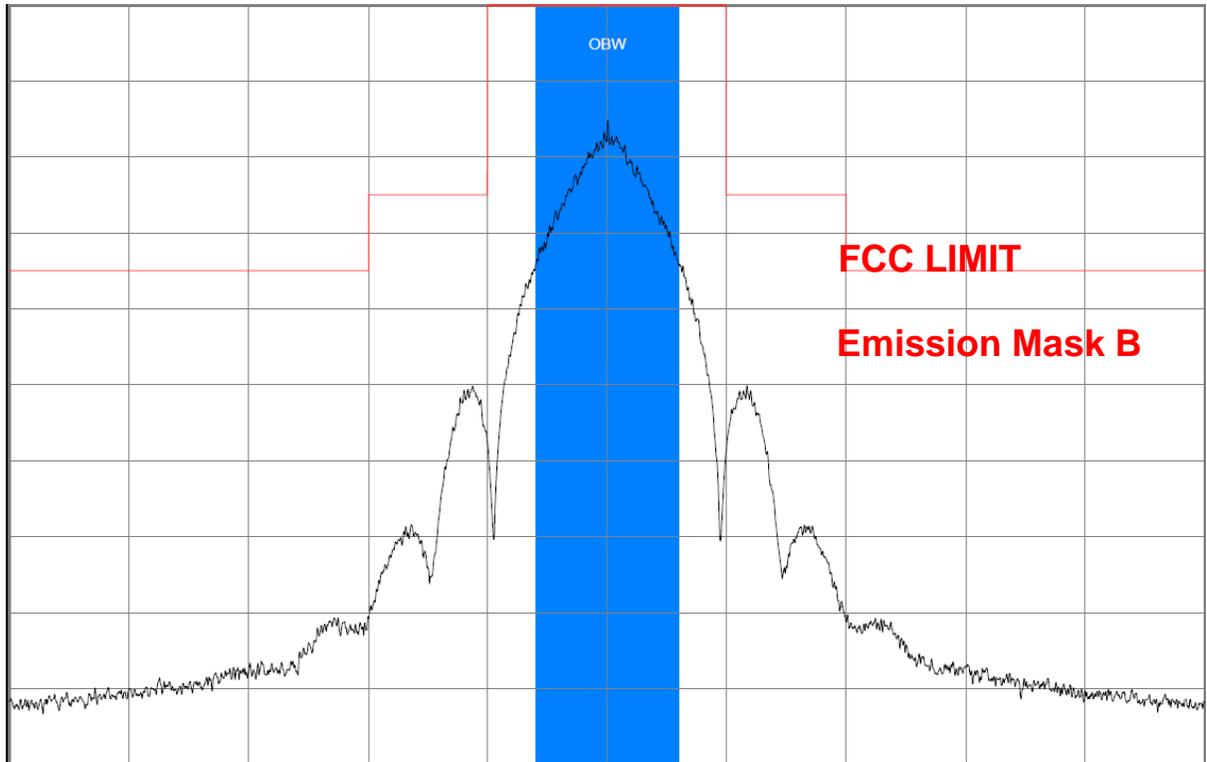


Figure 6E-11: 20 kHz Channel Spacing, 425.0125 MHz, Analog Voice Encryption, Mask B 20K0F1E

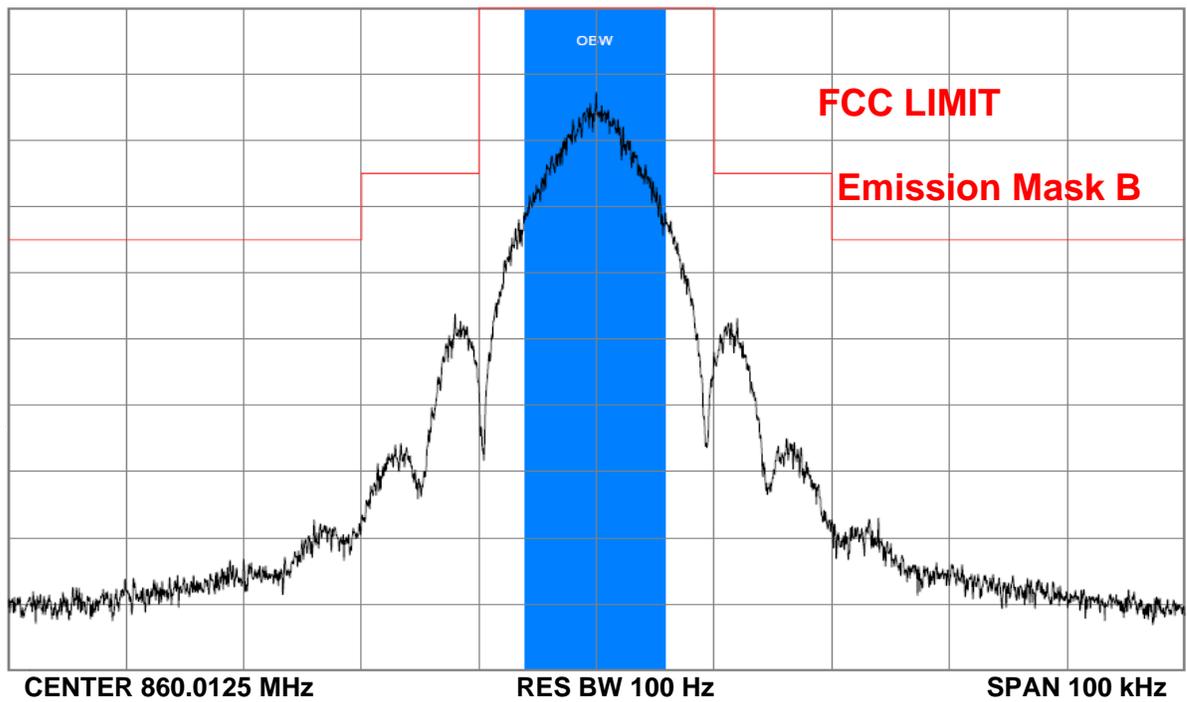


Figure 6E-12: 20 kHz Channel Spacing, 860.0125 MHz, Analog Voice Encryption Mask B 20K0F1E

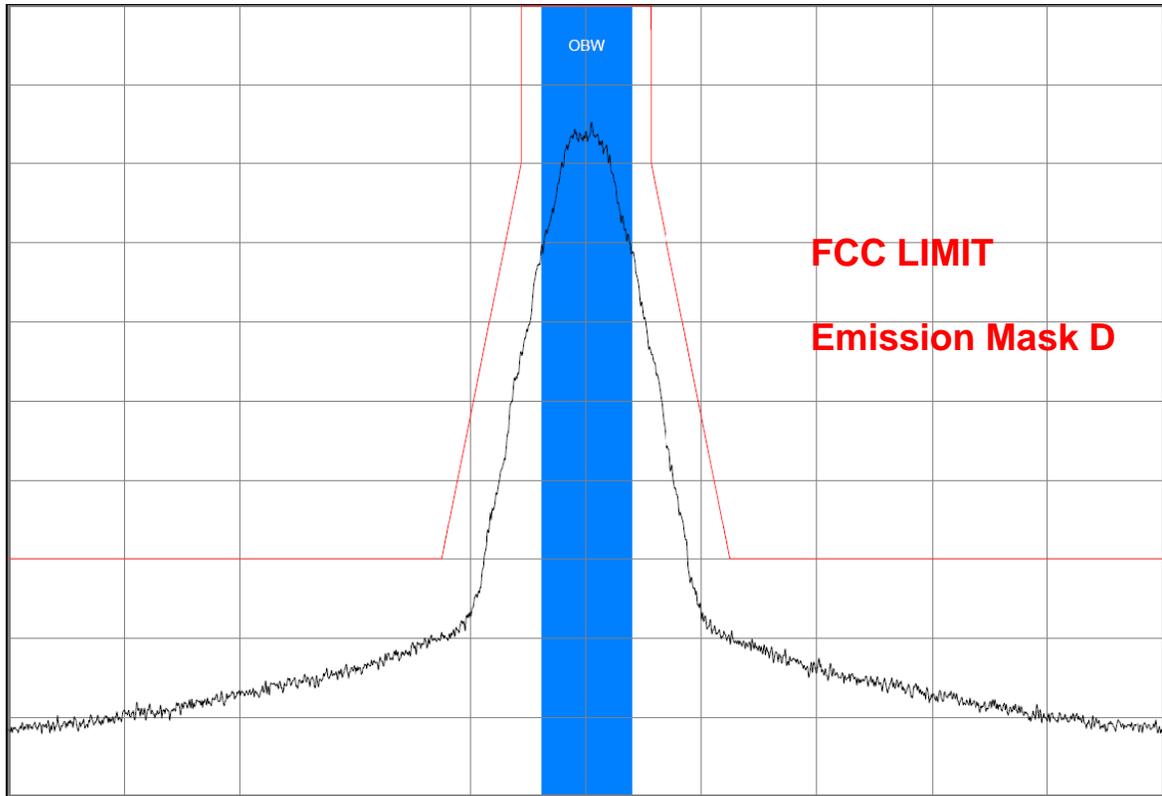


Figure 6E-13: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Voice Encryption, Mask D 8K10F1E

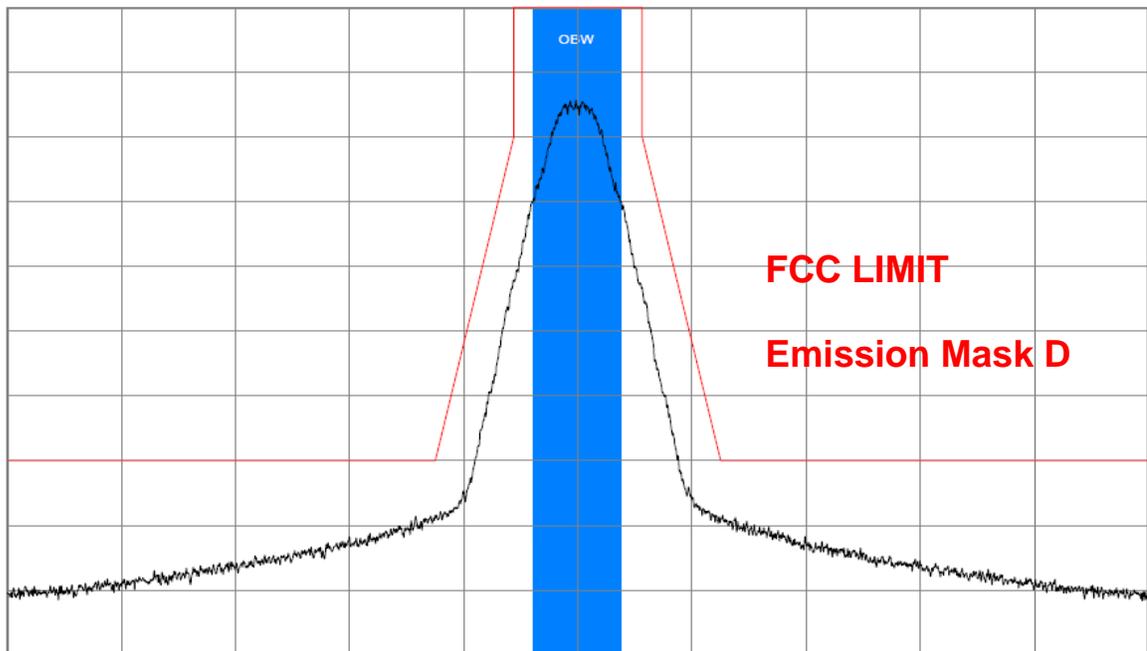


Figure 6E-14: 12.5 kHz Channel Spacing, 860.0125 MHz, Digital Voice Encryption Mask D 8K10F1E

EXHIBIT 6F

Conducted Spurious Emissions - Pursuant 47 CFR 2.1051 and 2.1033(c) (13)

Note: Green lines on graphs correspond to the FCC limit of -20 dBm for 12.5 kHz channel spacing and -13 dBm for 25 kHz channel spacing.

ANALOG MODE

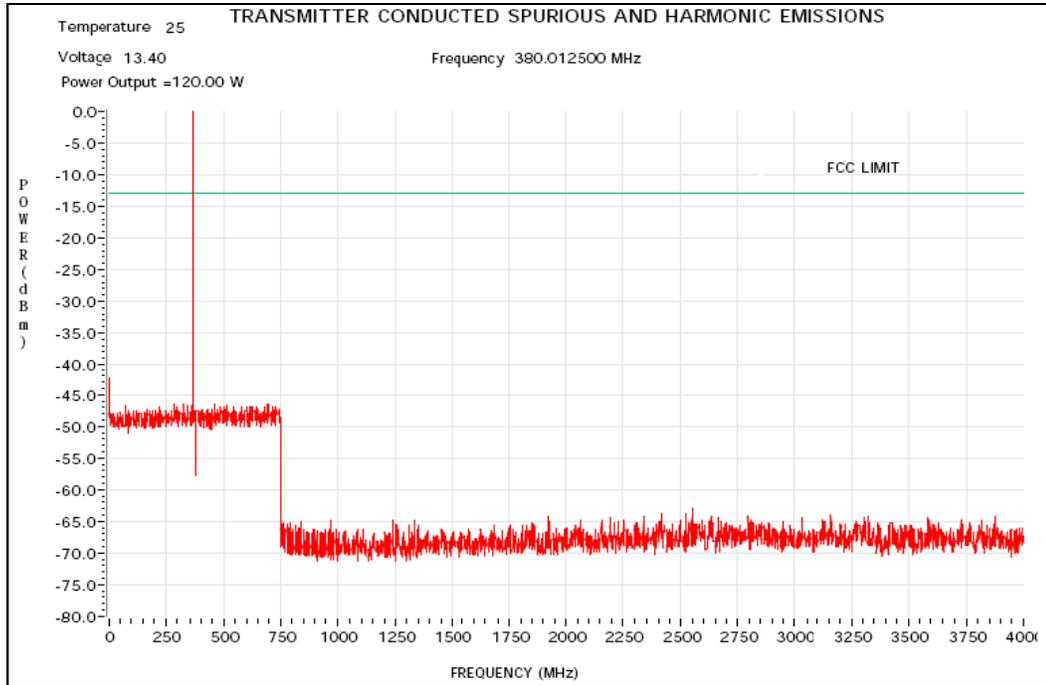


Figure 6F-1: 120W Harmonics of Carrier 380.0125 MHz, 25 kHz Channel Spacing

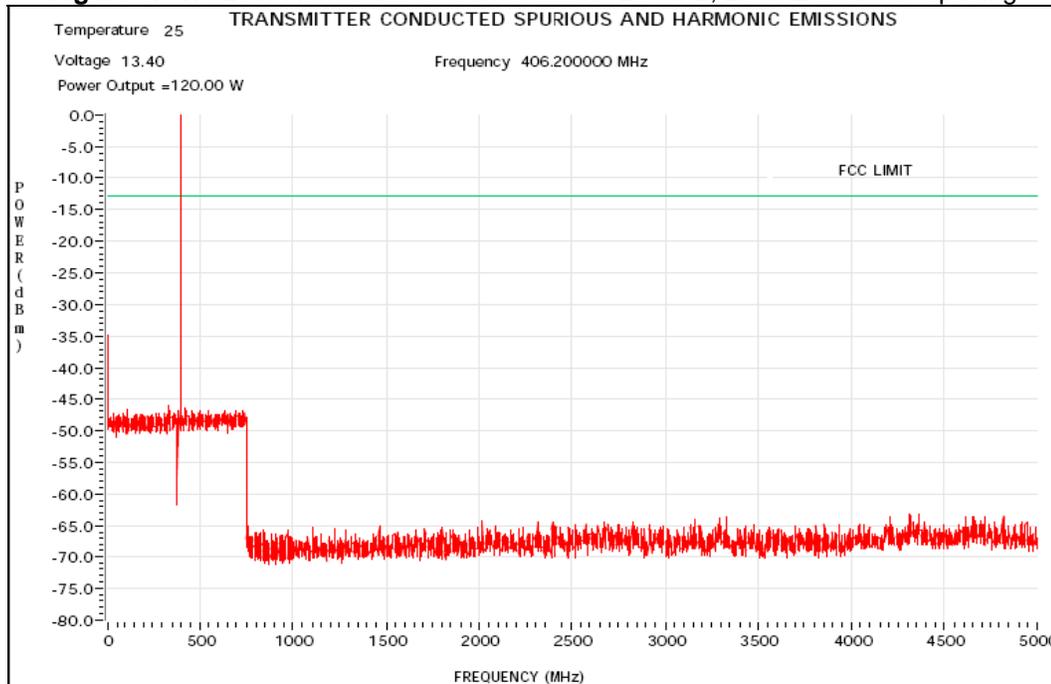


Figure 6F-2: 120W Harmonics of Carrier 406.2 MHz, 25 kHz Channel Spacing

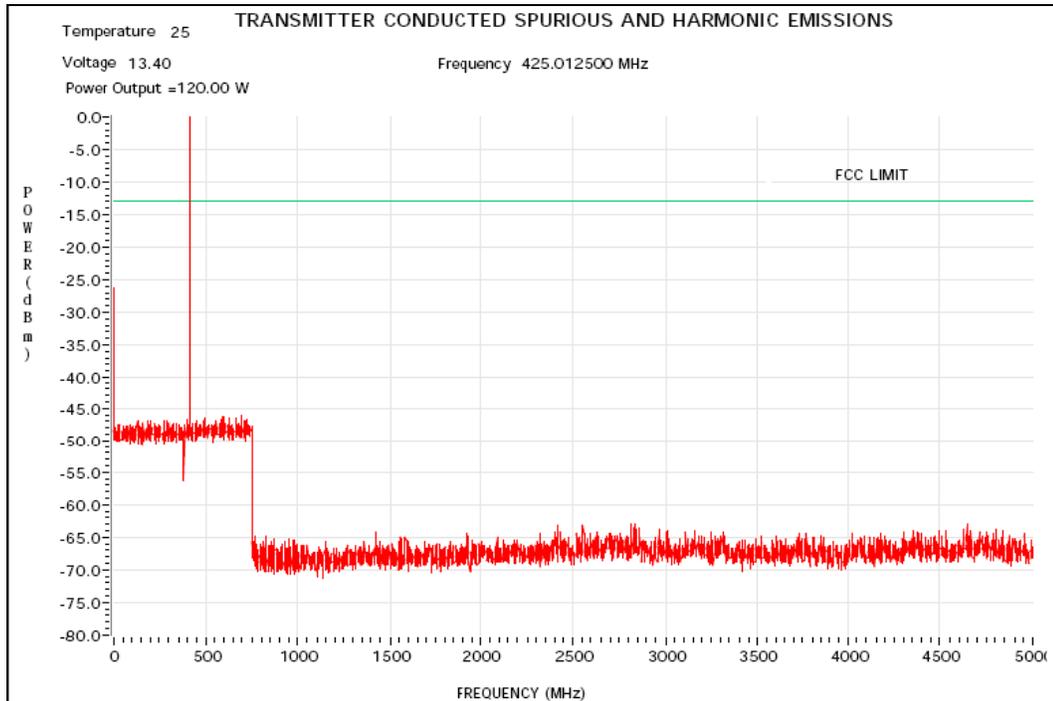


Figure 6F-3: 120W Harmonics of Carrier 425.0125 MHz, 25 kHz Channel Spacing

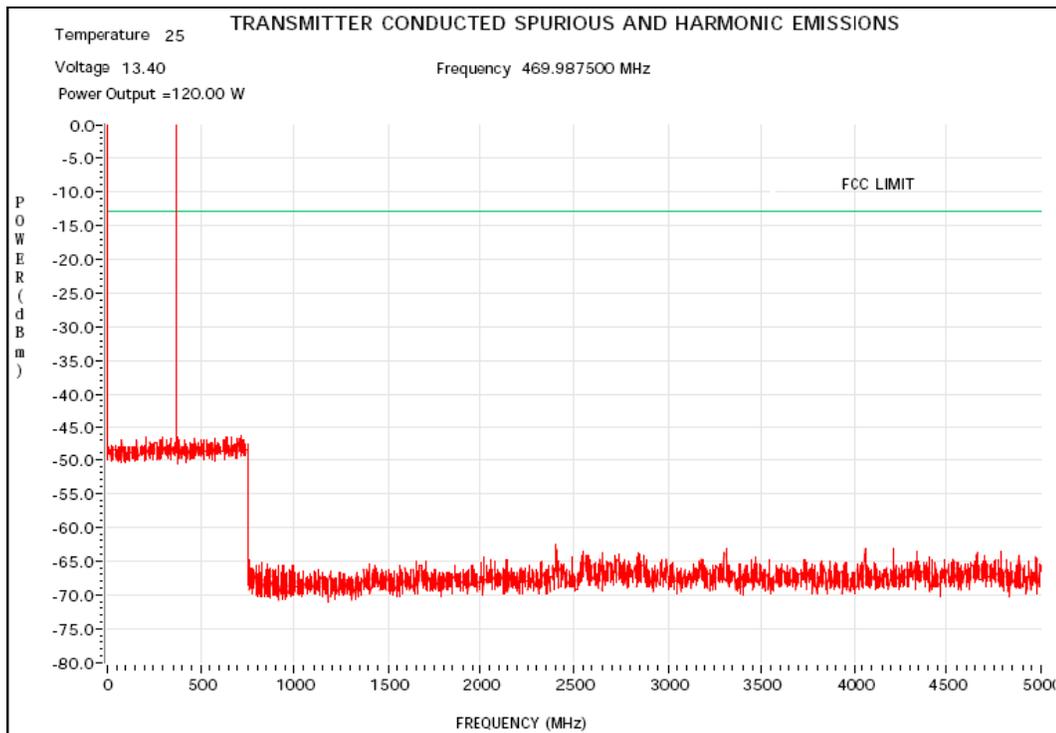


Figure 6F-4: 120W Harmonics of Carrier 469.9875 MHz, 25 kHz Channel Spacing

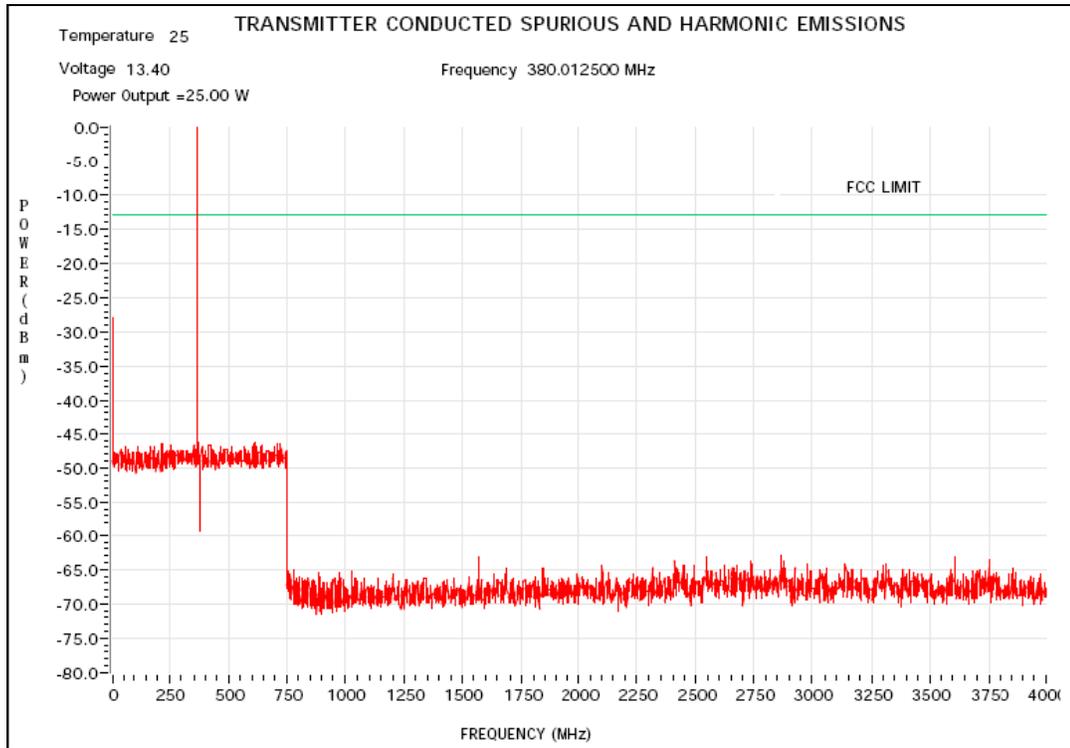


Figure 6F-5: 25W Harmonics of Carrier 380.0125 MHz, 25 kHz Channel Spacing

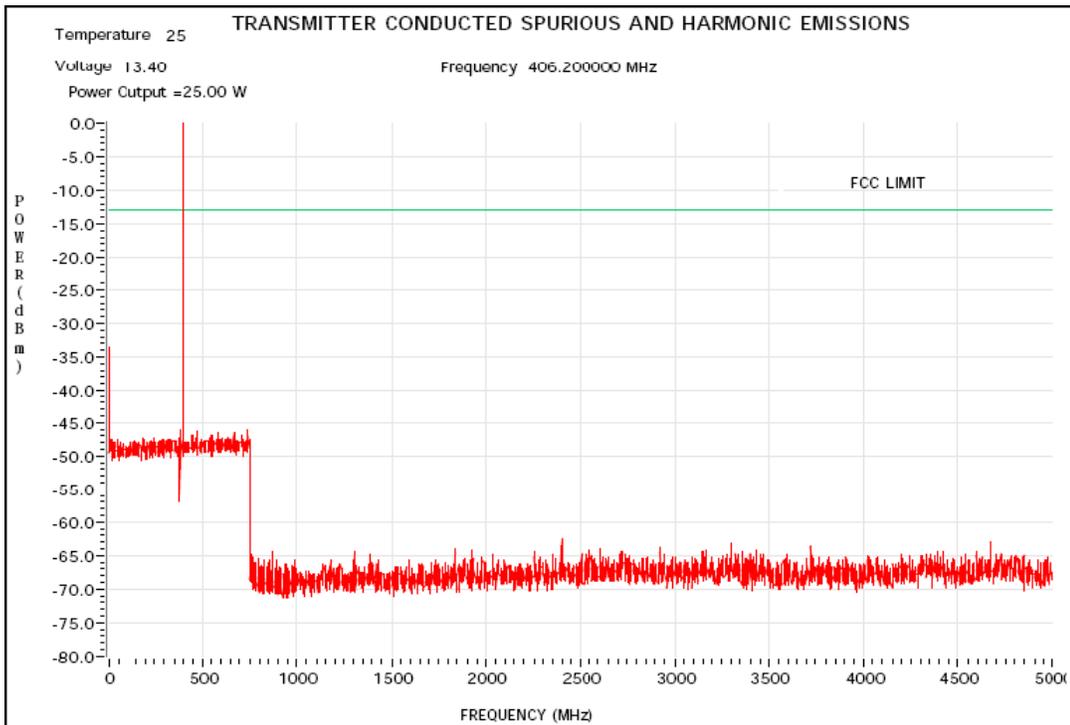


Figure 6F-6: 25W Harmonics of Carrier 406.2 MHz, 25 kHz Channel Spacing

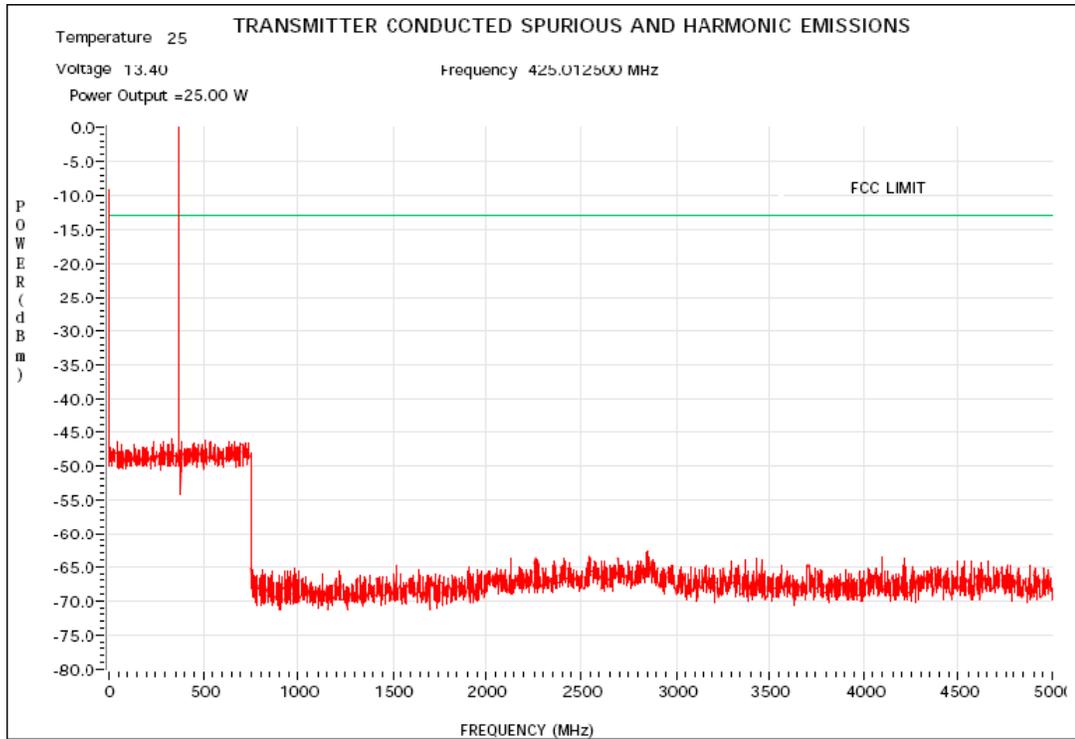


Figure 6F-7: 25W Harmonics of Carrier 425.0125 MHz, 25 kHz Channel Spacing

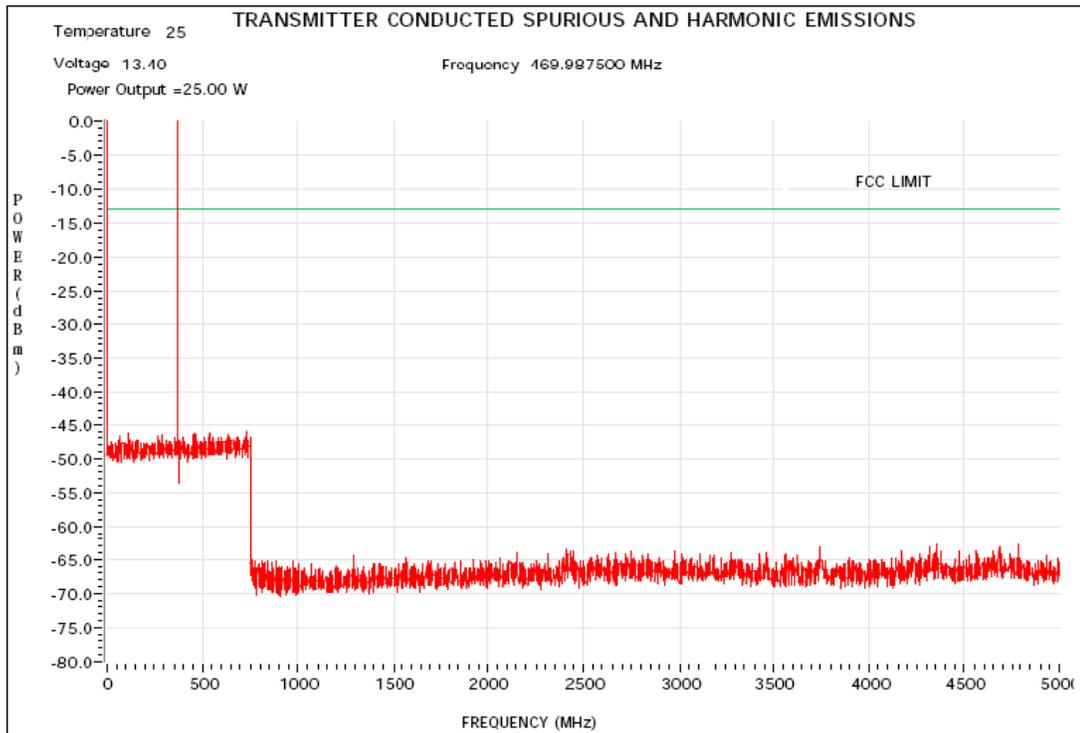


Figure 6F-8: 25W Harmonics of Carrier 469.9875 MHz, 25 kHz Channel Spacing

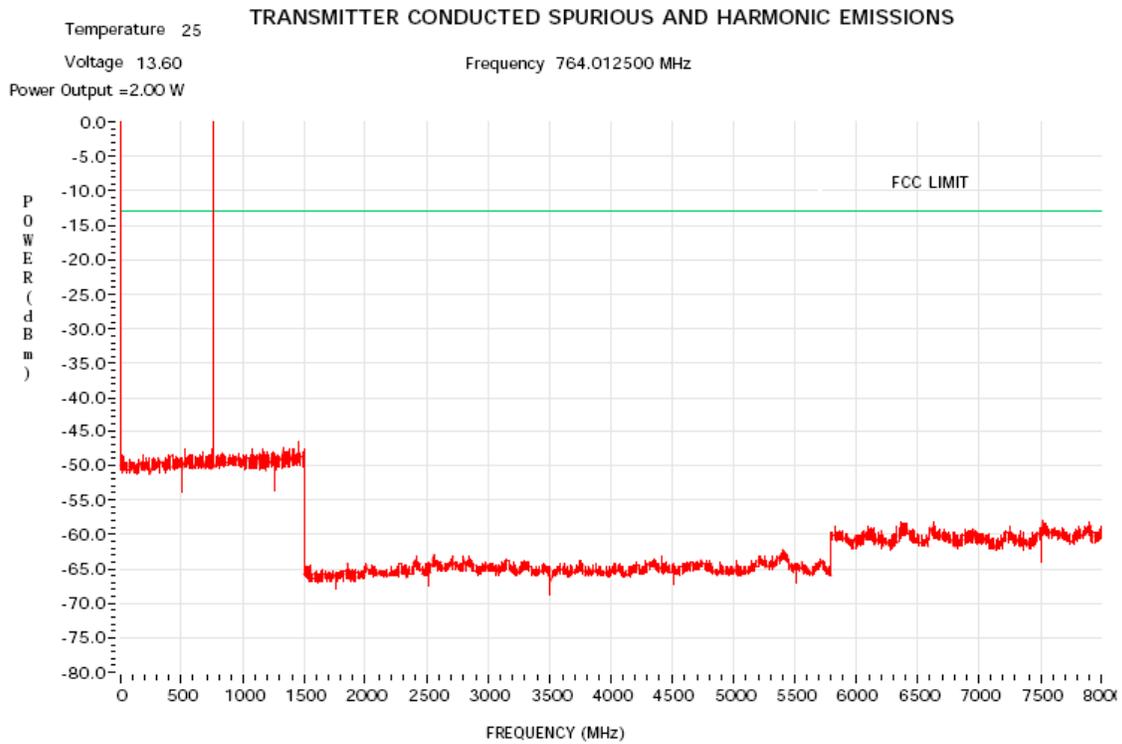


Figure 6F-9: 2 Watts Harmonic of Carrier 764.0125 MHz

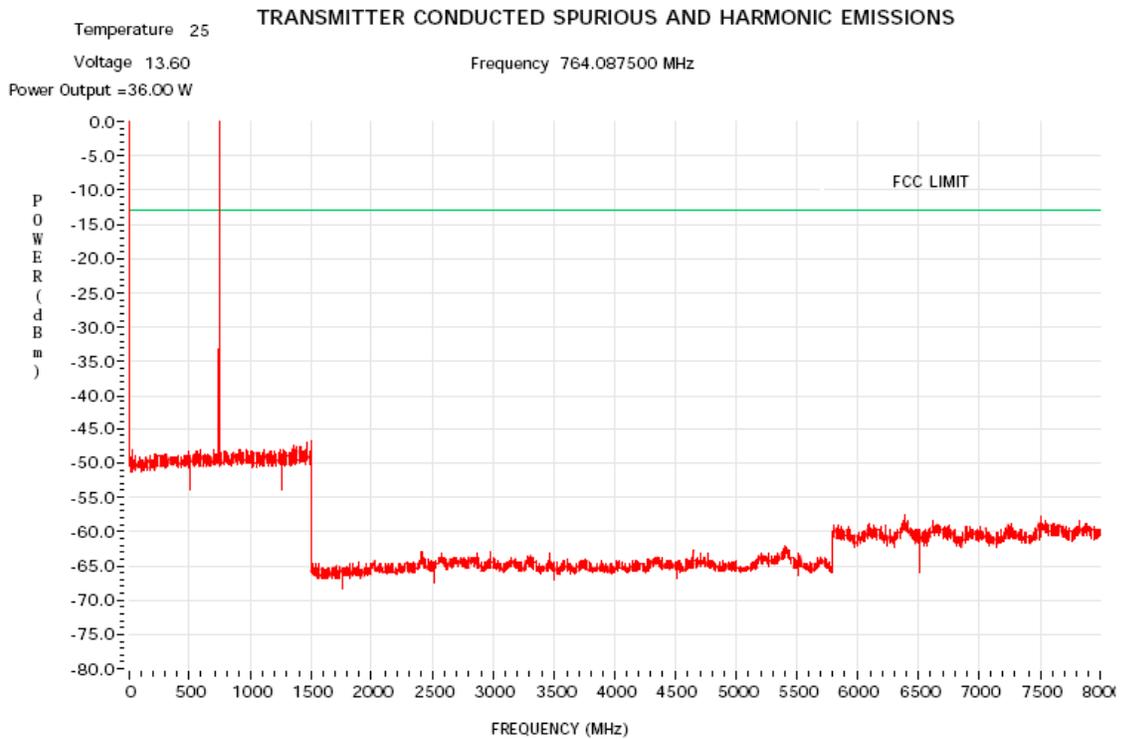


Figure 6F-10: 36 Watts Harmonic of Carrier 764.0875 MHz

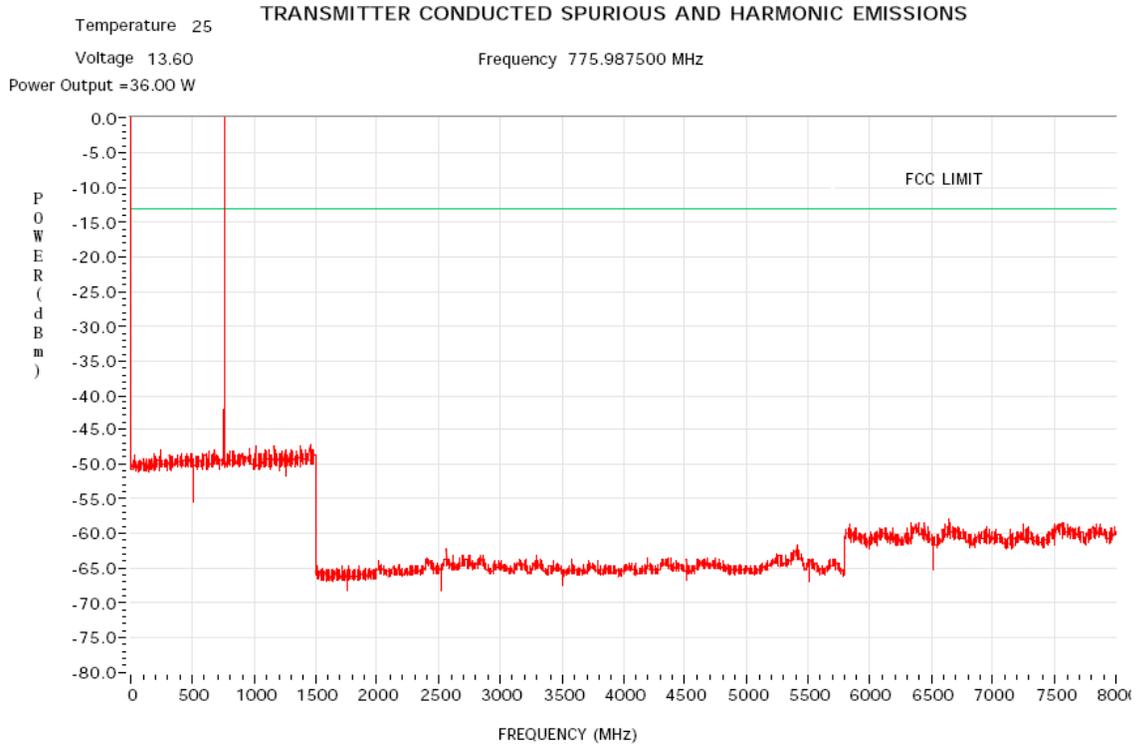


Figure 6F-11: 36 Watts Harmonic of Carrier 775.9875 MHz

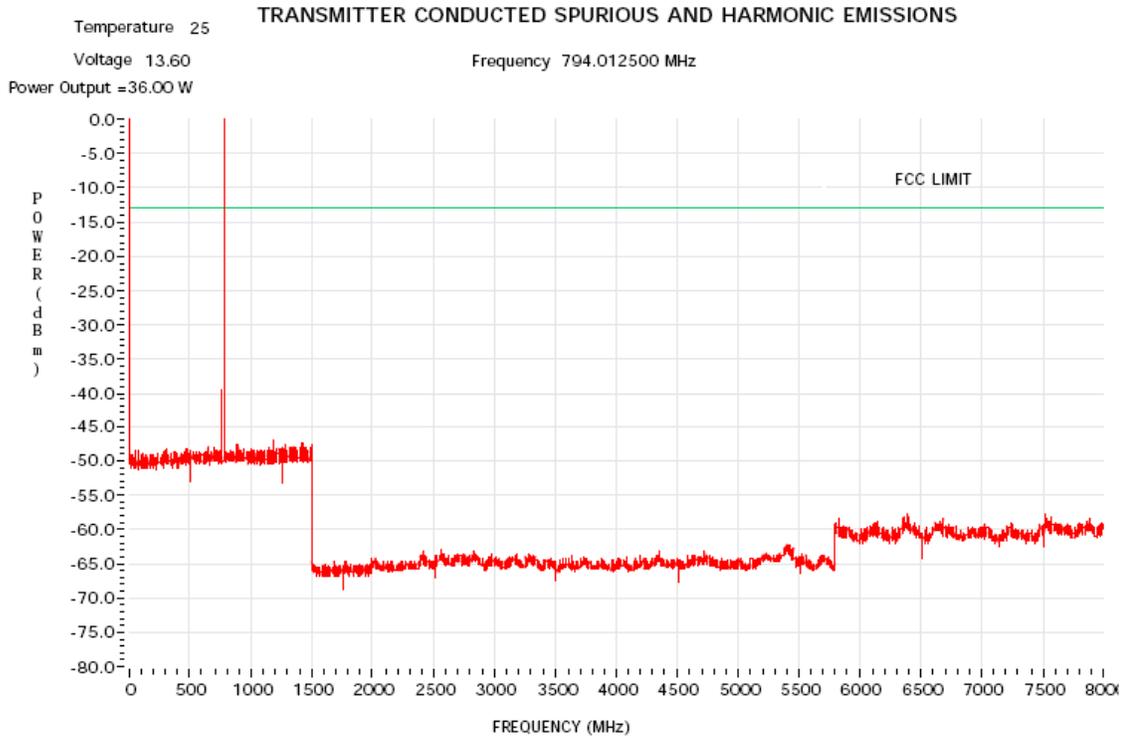


Figure 6F-12: 36 Watts Harmonic of Carrier 764.0125 MHz

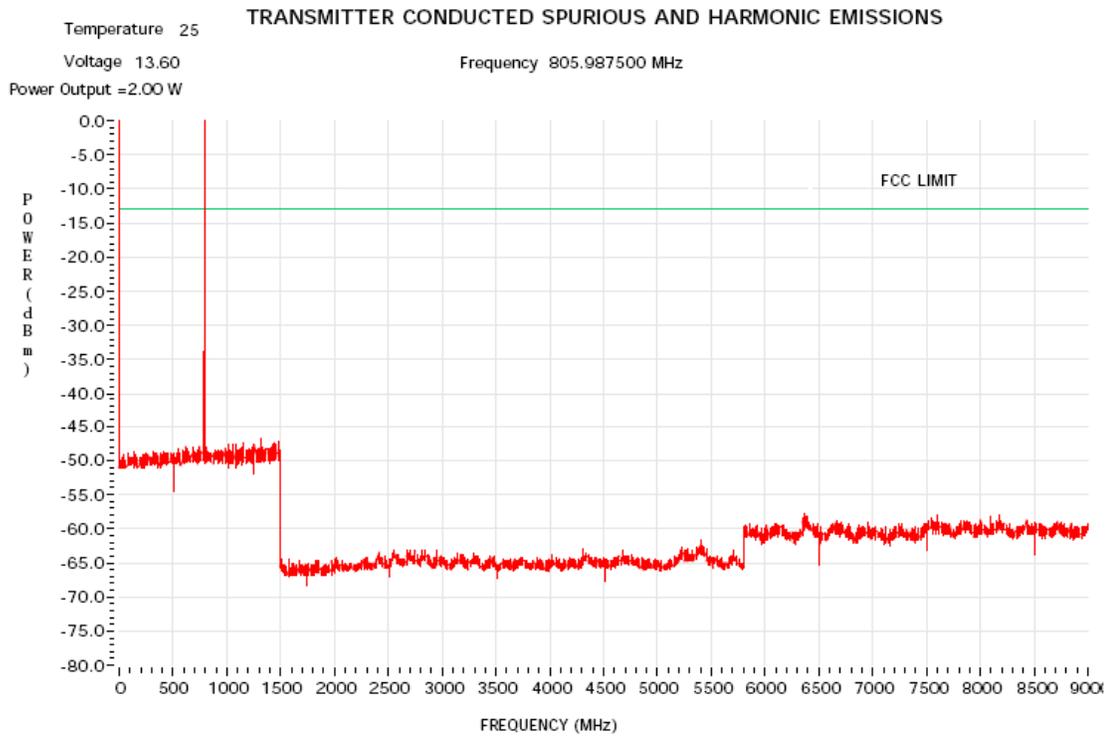


Figure 6F-13: 2 Watts Harmonic of Carrier 805.9875 MHz

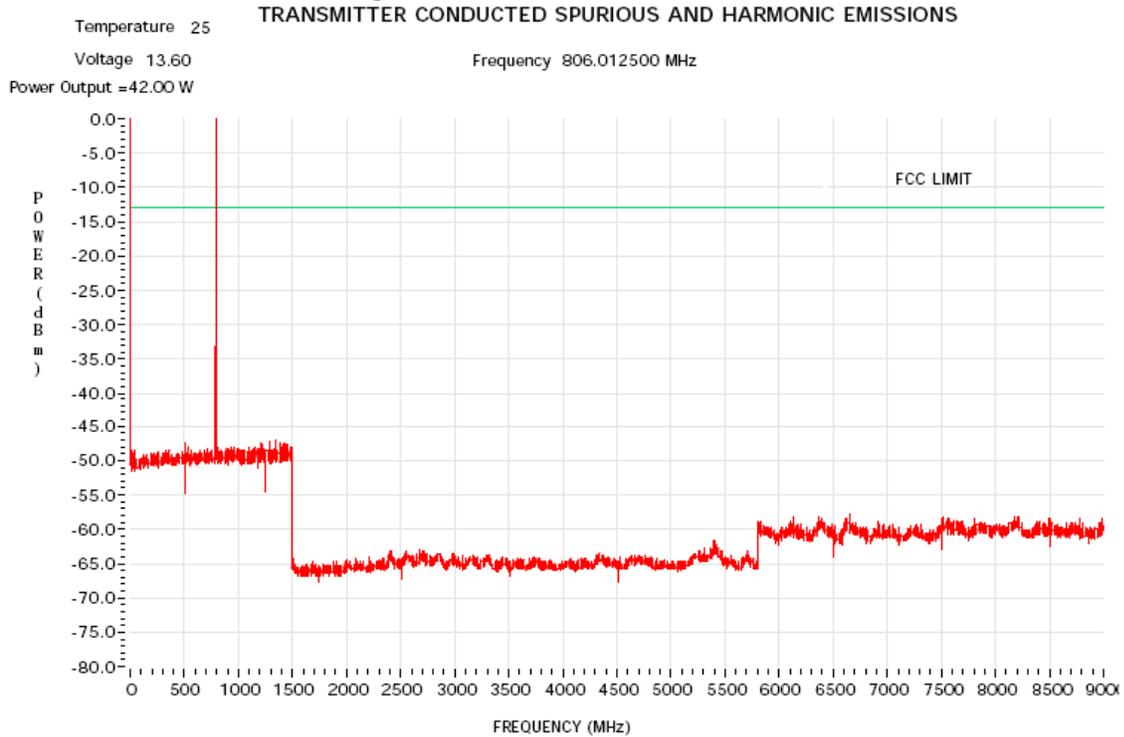


Figure 6F-14: 42 Watts Harmonic of Carrier 806.0125 MHz

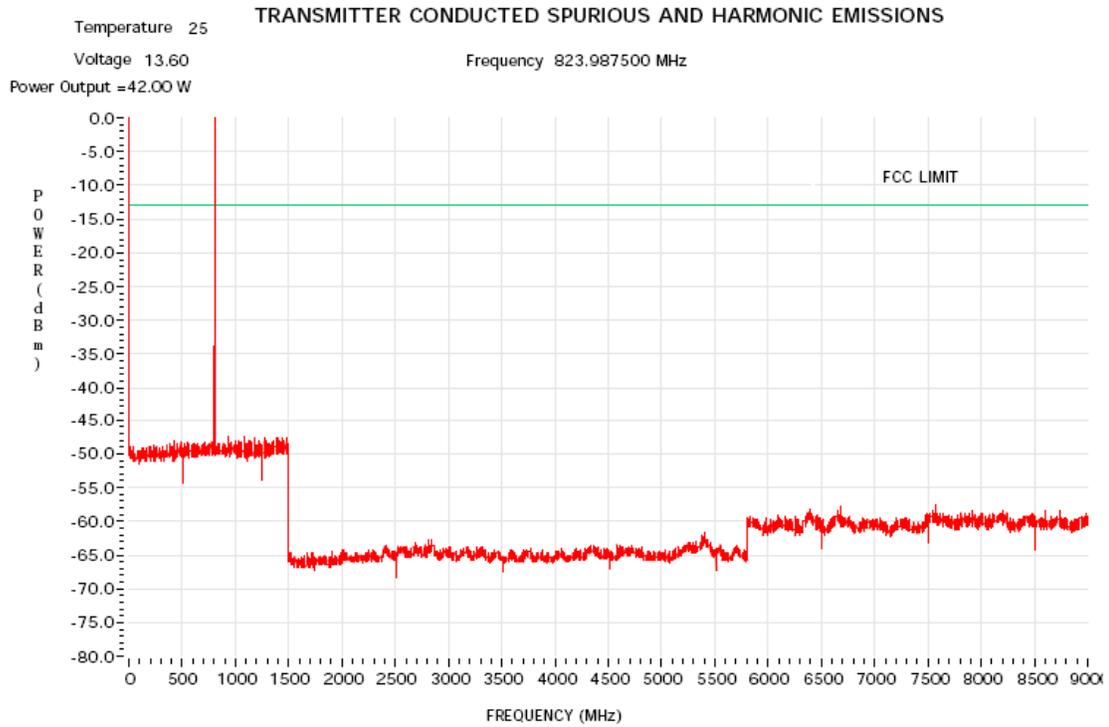


Figure 6F-15: 42 Watts Harmonic of Carrier 823.9875 MHz

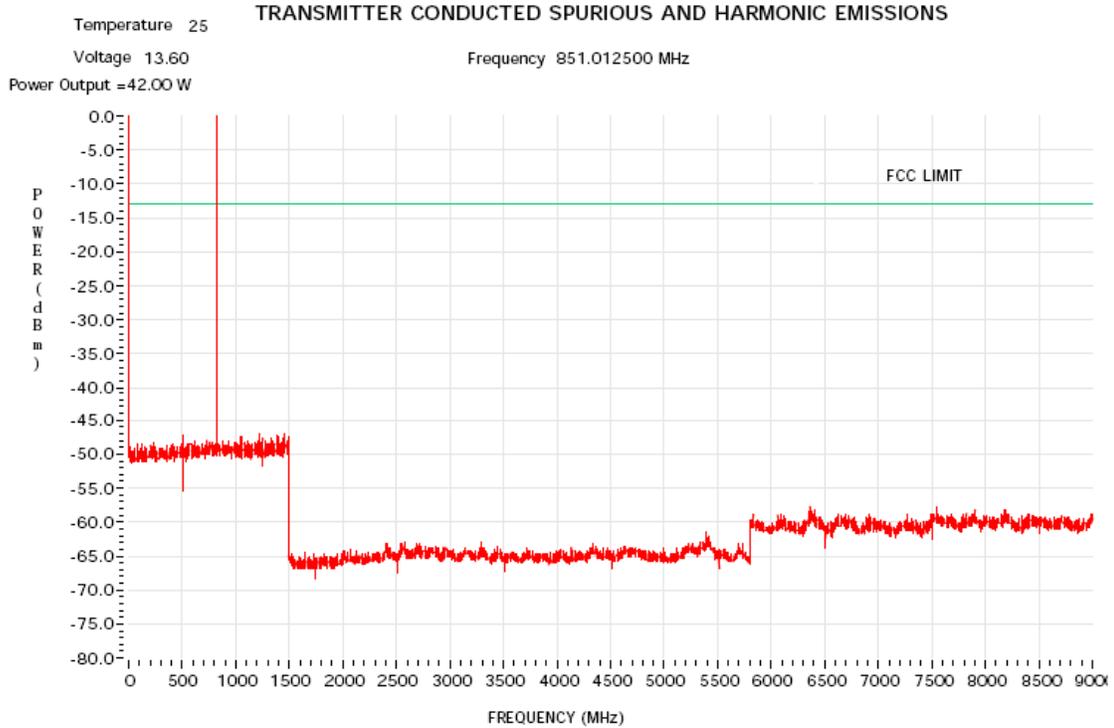


Figure 6F-16: 42 Watts Harmonic of Carrier 851.0125 MHz

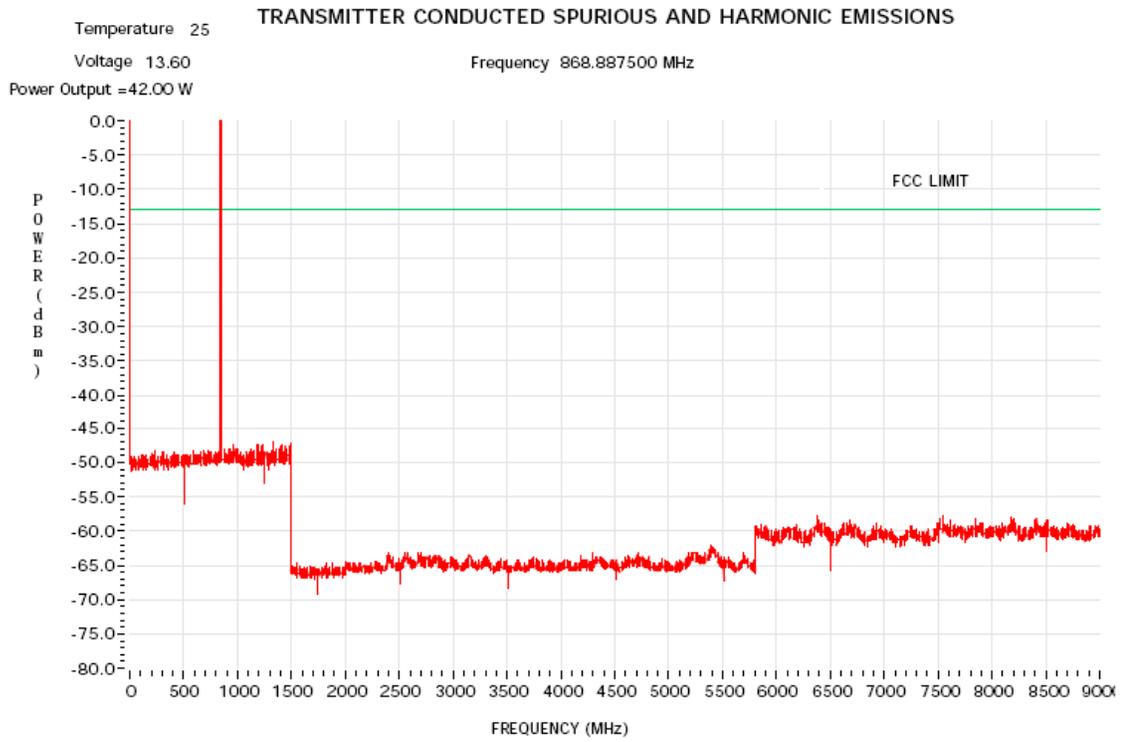


Figure 6F-17: 42 Watts Harmonic of Carrier 868.8875 MHz

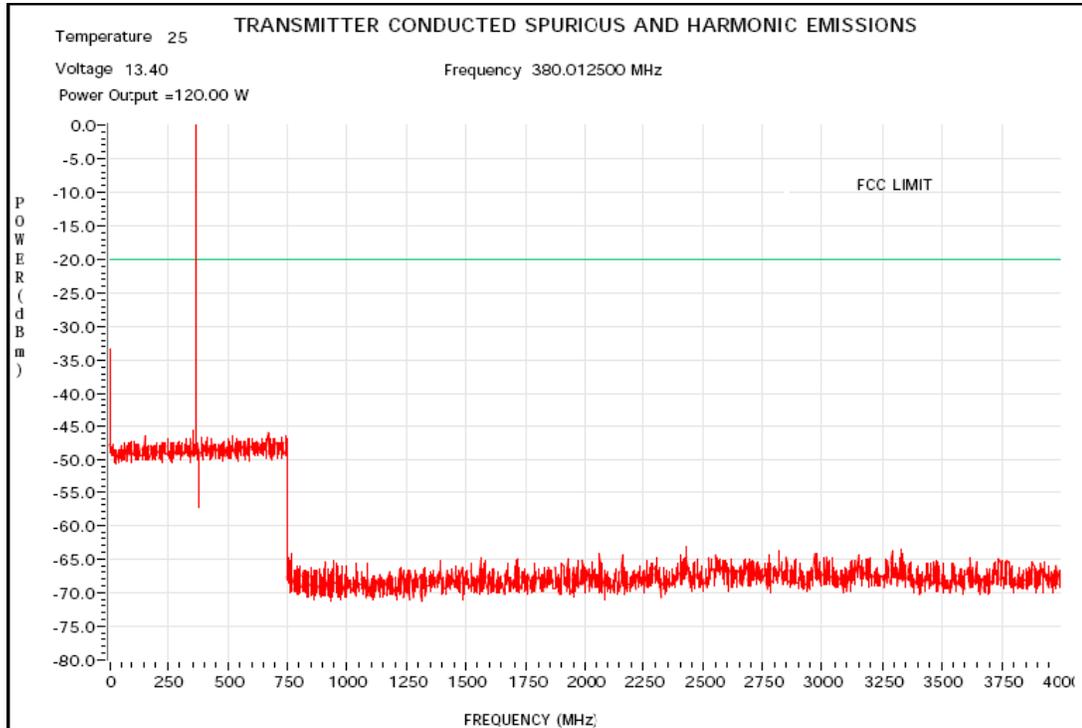


Figure 6F-18: 120W Harmonics of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

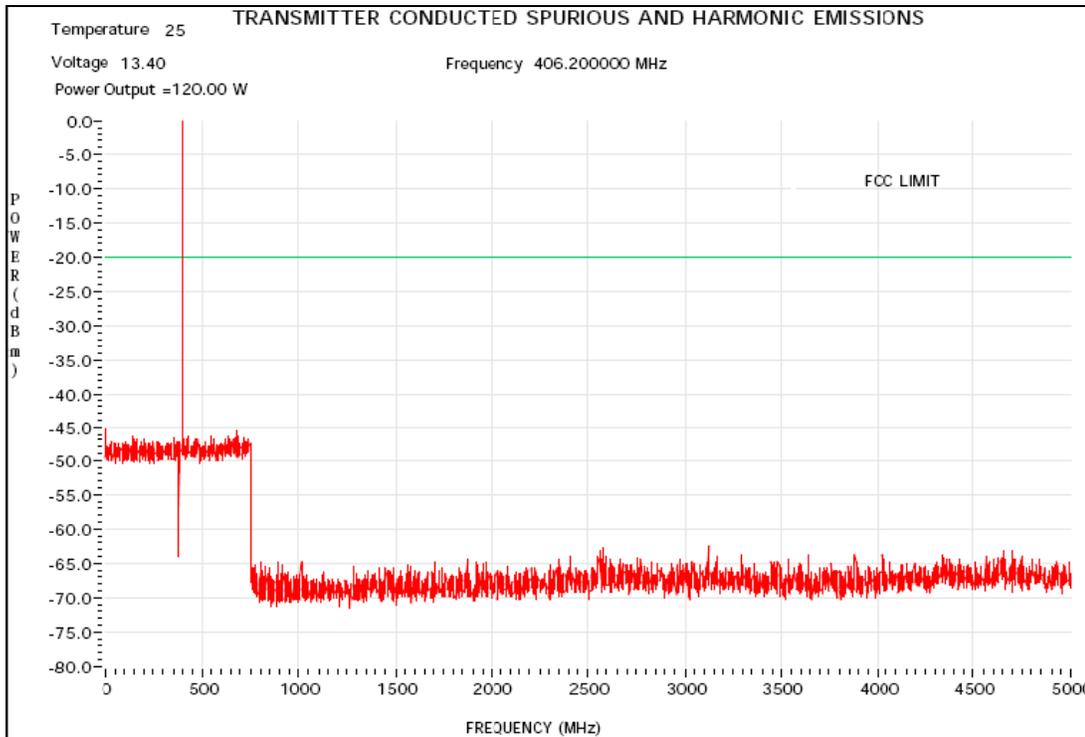


Figure 6F-19: 120W Harmonics of Carrier 406.2 MHz, 12.5 kHz Channel Spacing

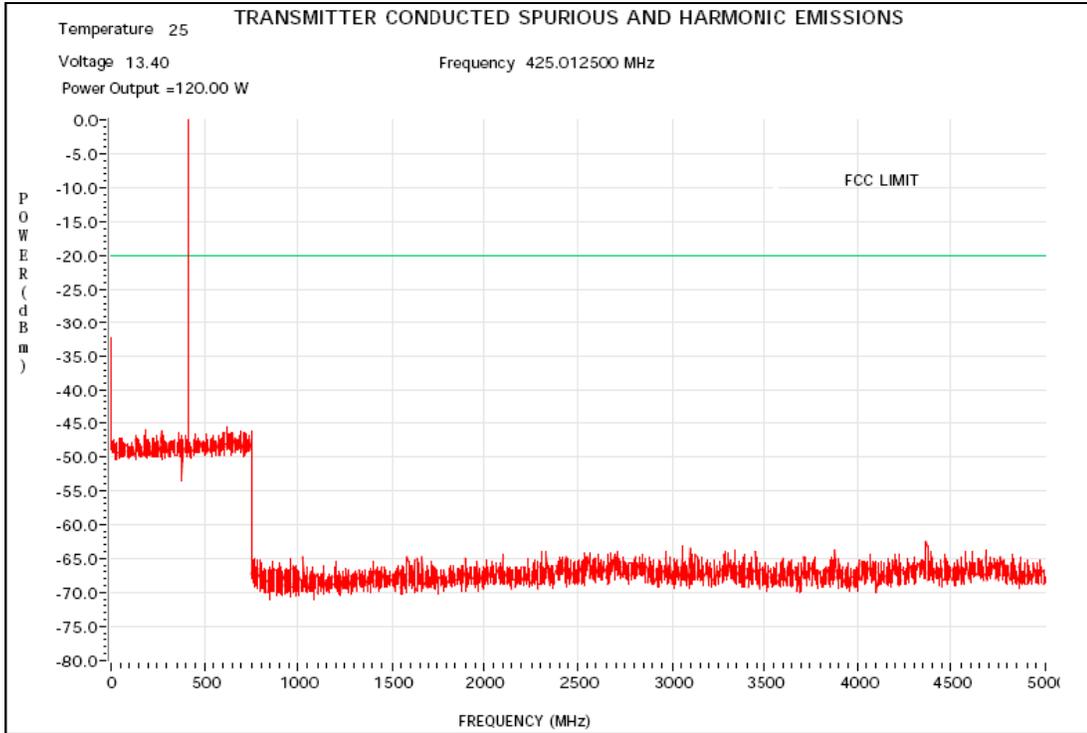


Figure 6F-20: 120W Harmonics of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

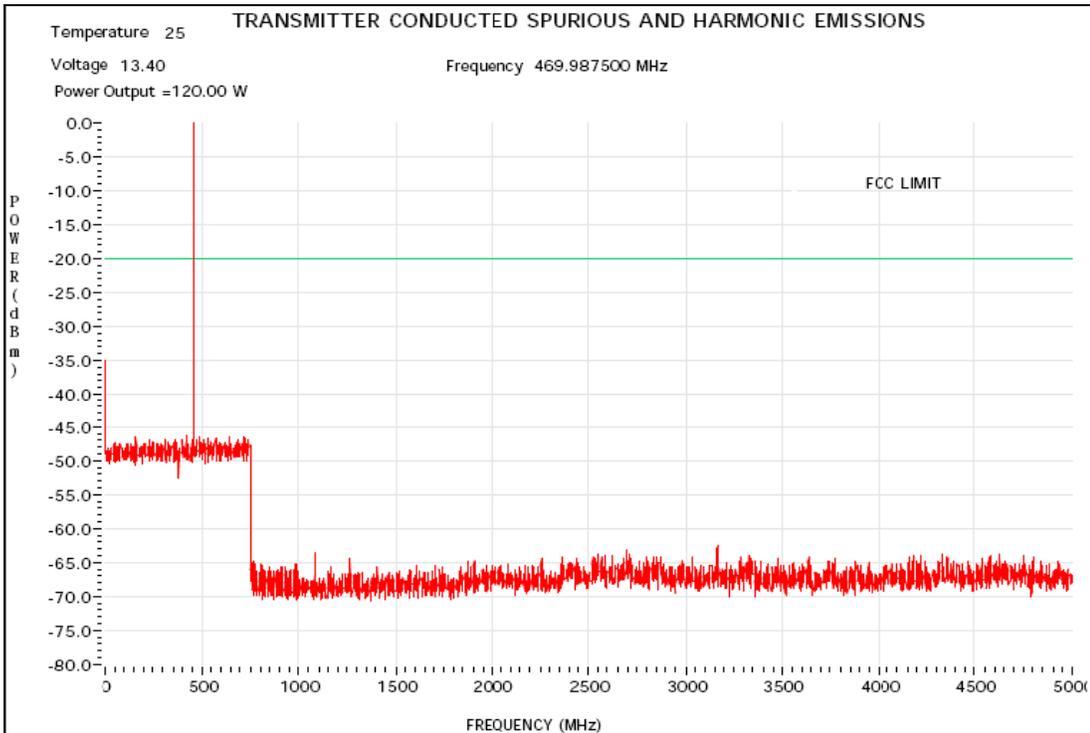


Figure 6F-21: 120W Harmonics of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

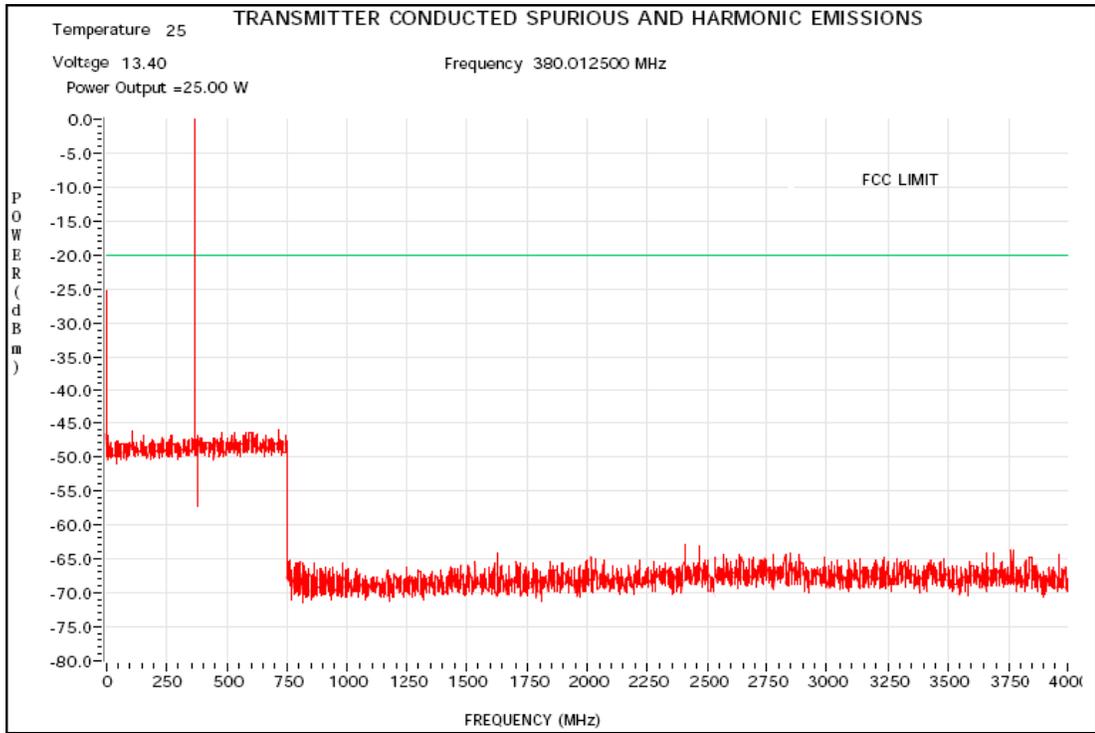


Figure 6F-22: 25W Harmonics of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

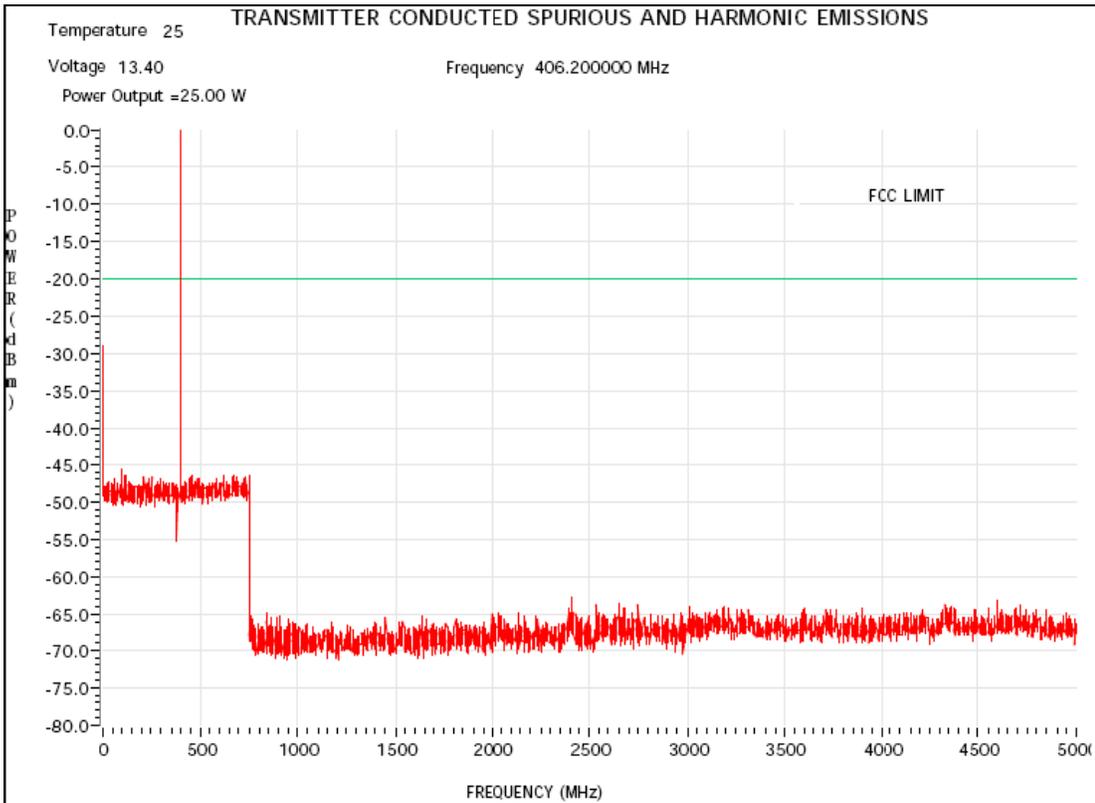


Figure 6F-23: 25W Harmonics of Carrier 406.2 MHz, 12.5 kHz Channel Spacing

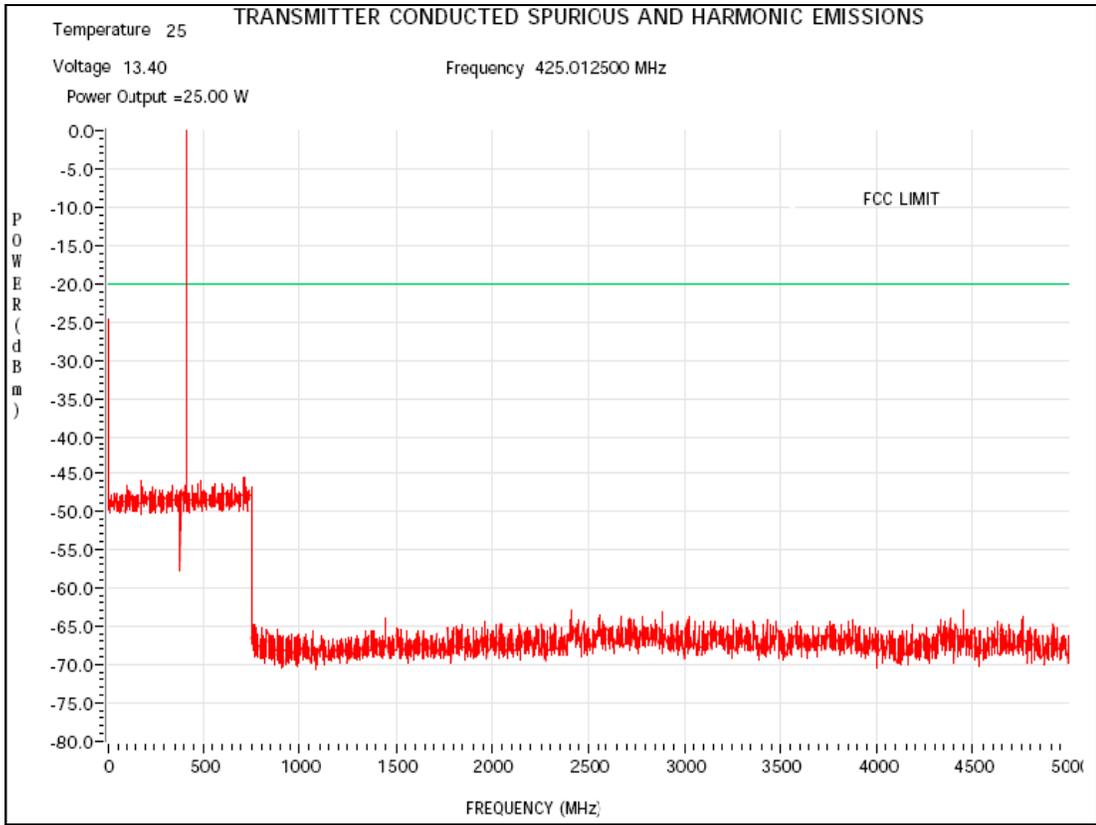


Figure 6F-24: 25W Harmonics of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

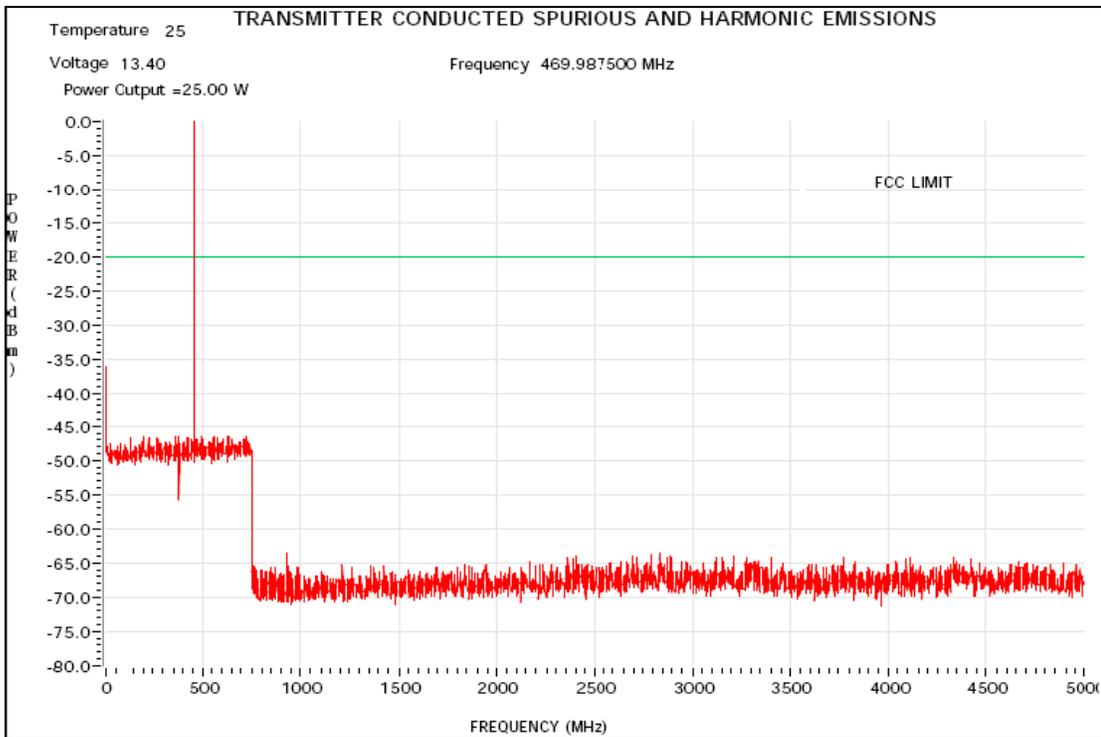


Figure 6F-25: 25W Harmonics of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

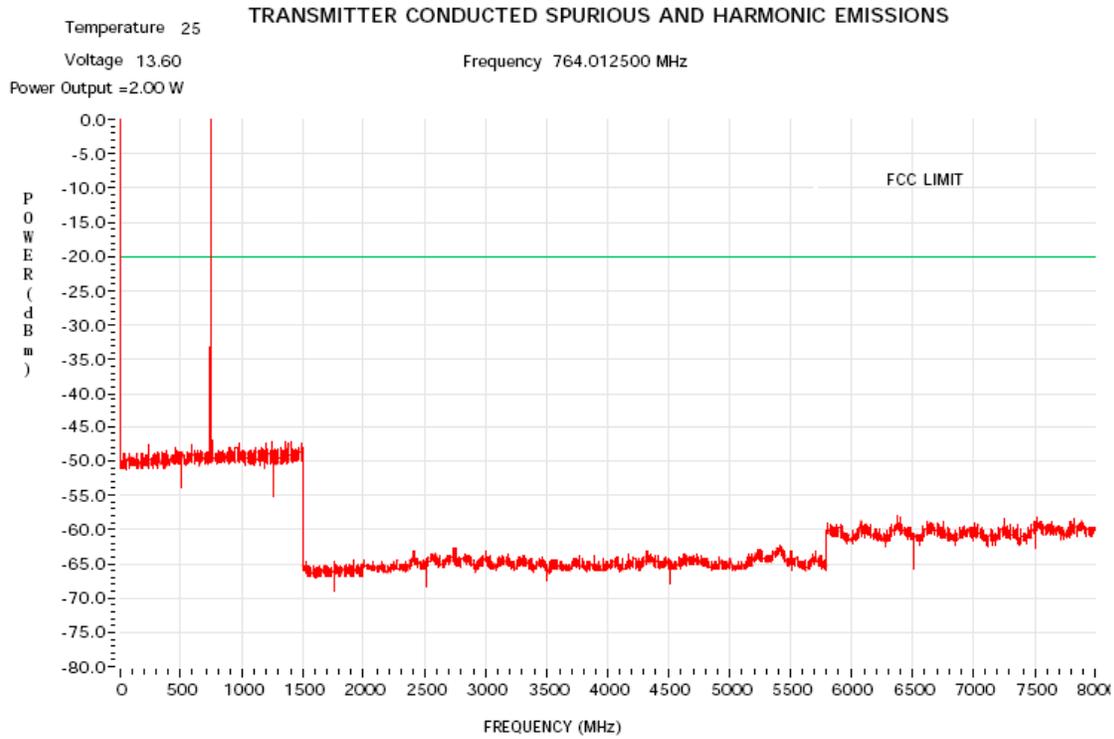


Figure 6F-26: 2 Watts Harmonic of Carrier 764.0125 MHz

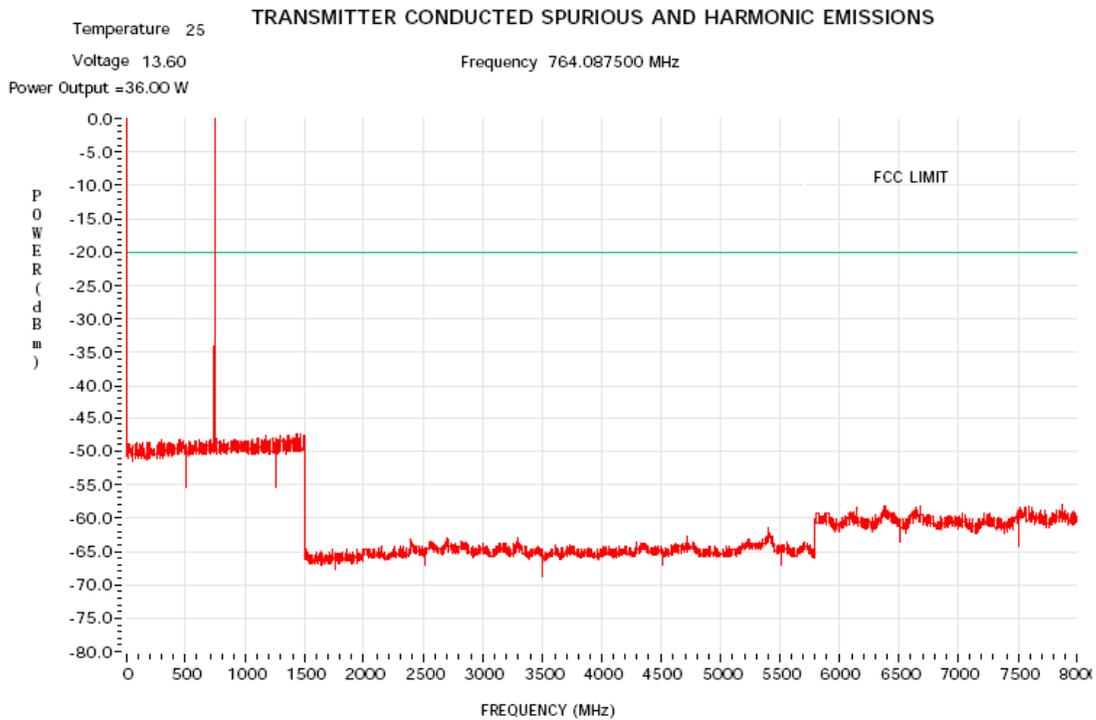


Figure 6F-27: 36 Watts Harmonic of Carrier 764.0875 MHz

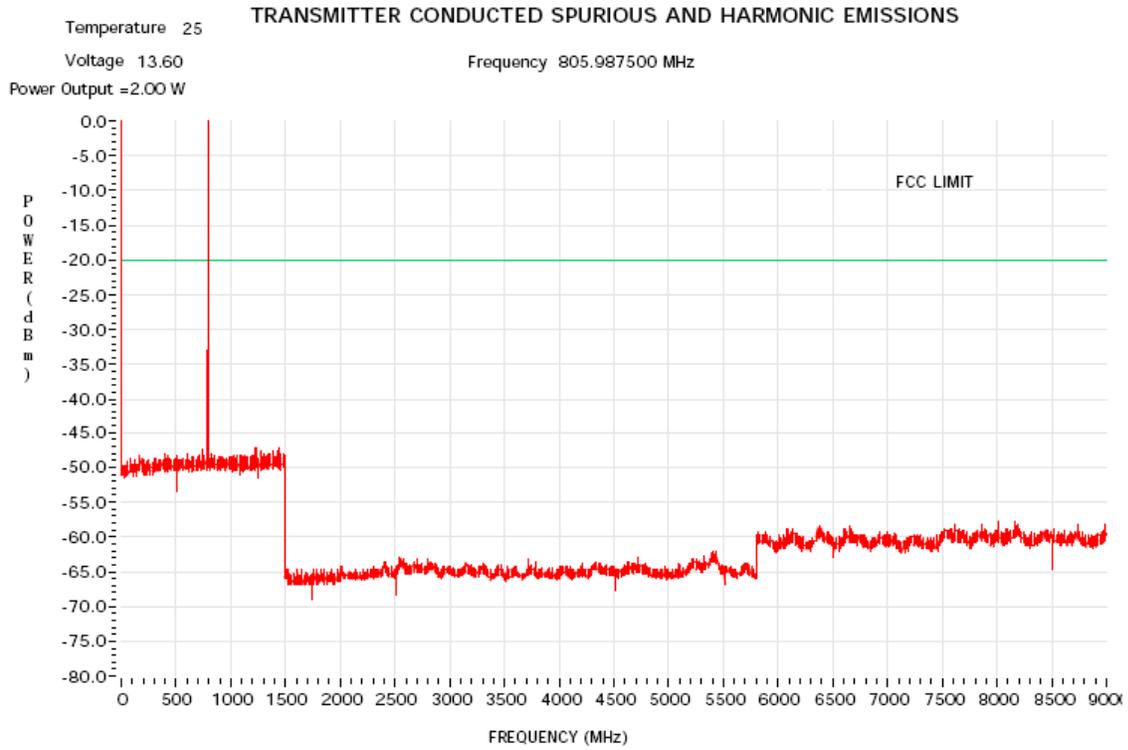


Figure 6F-28: 2 Watts Harmonic of Carrier 805.9875 MHz

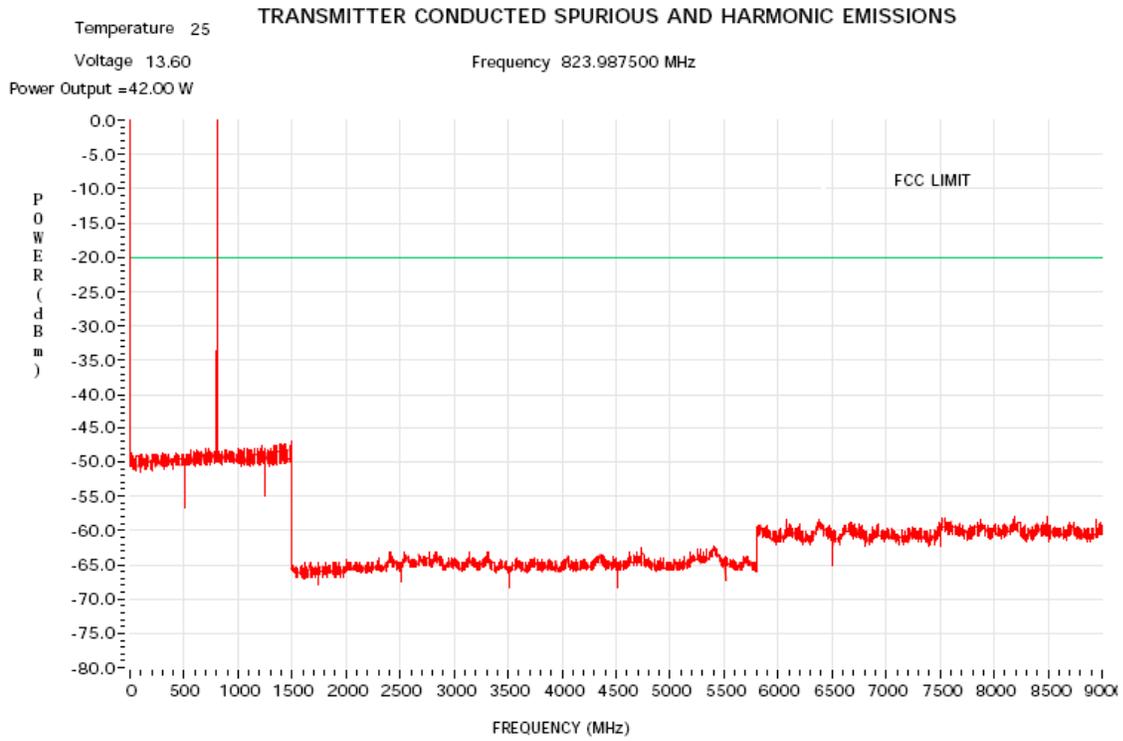


Figure 6F-29: 42 Watts Harmonic of Carrier 823.9875 MHz

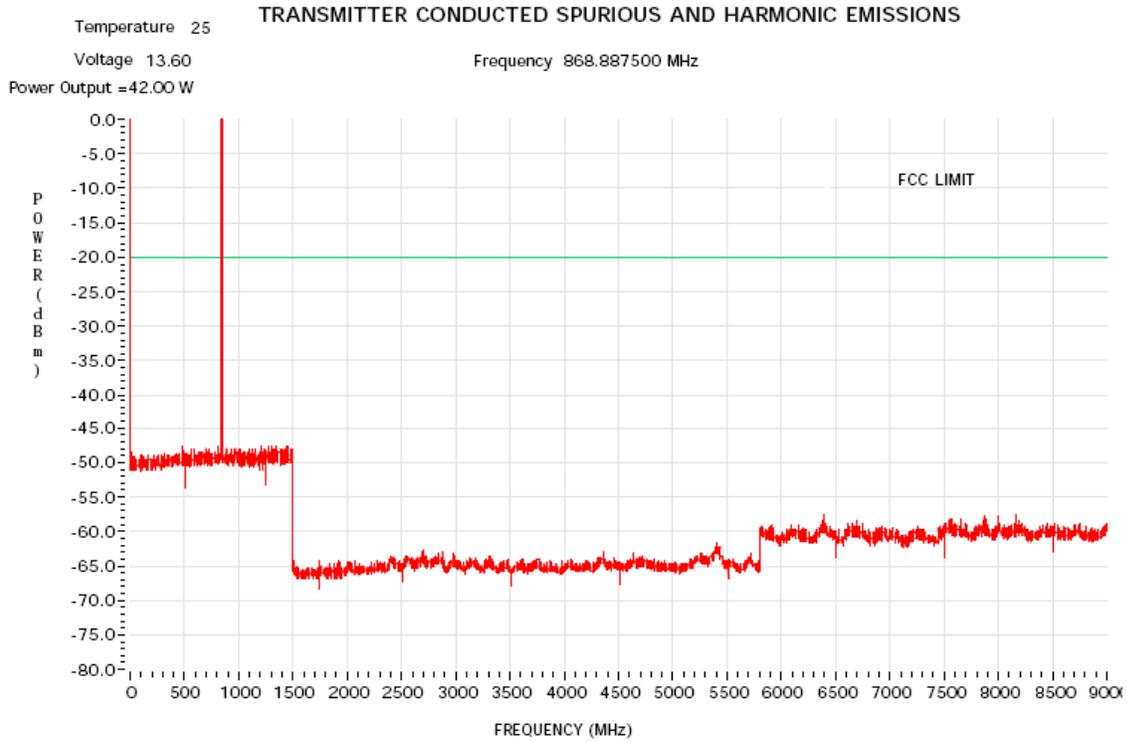


Figure 6F-30: 42 Watts Harmonic of Carrier 868.8875 MHz

TDMA- F2

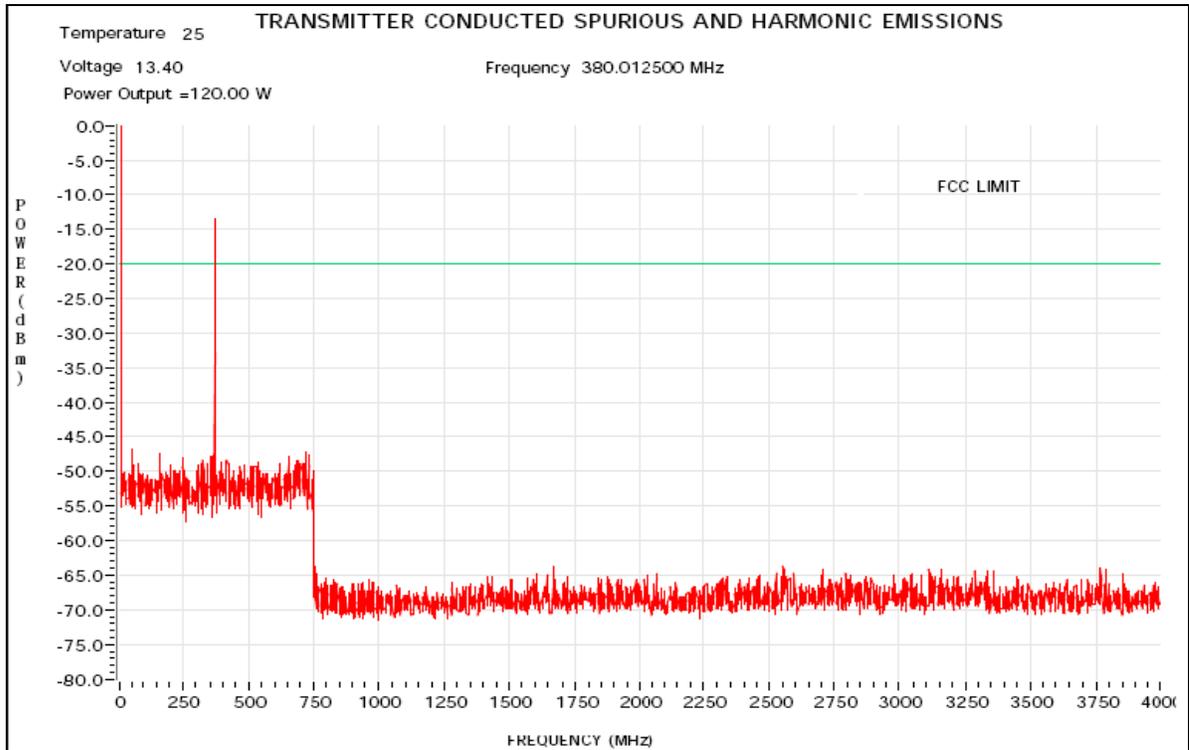


Figure 6F-31: 120W Harmonics of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

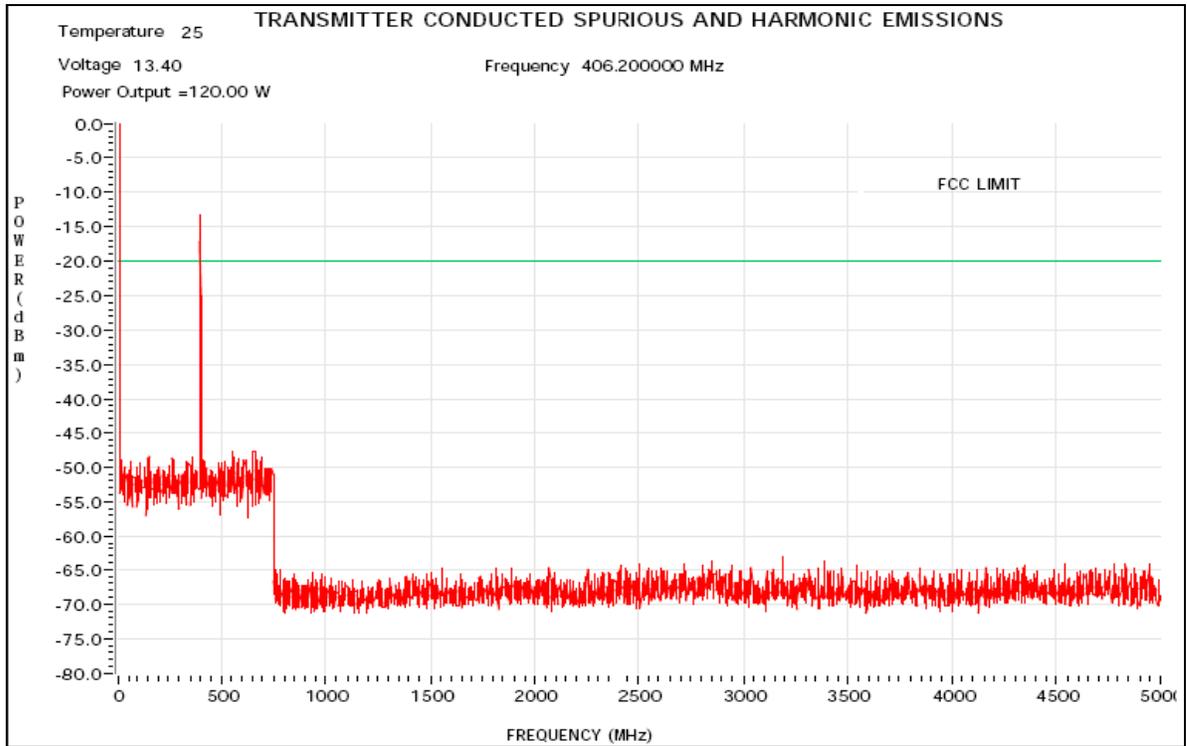


Figure 6F-32: 120W Harmonics of Carrier 406.2 MHz, 12.5 kHz Channel Spacing

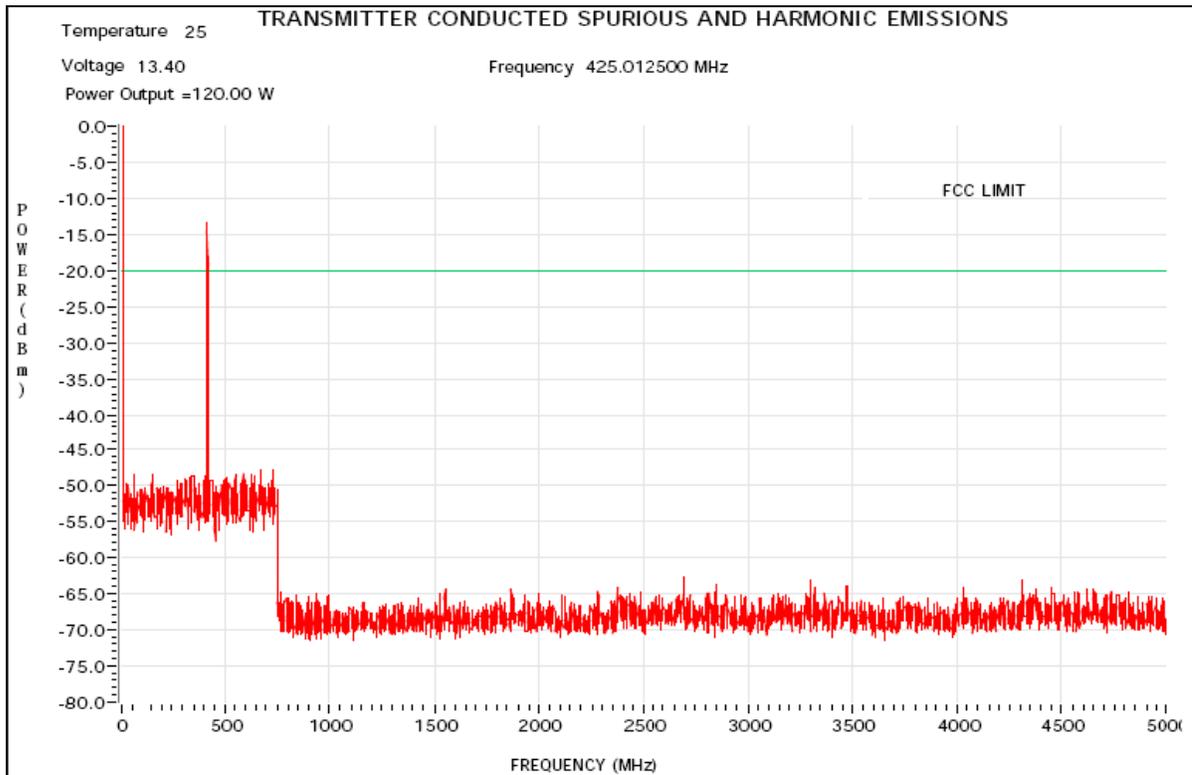


Figure 6F-33: 120W Harmonics of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

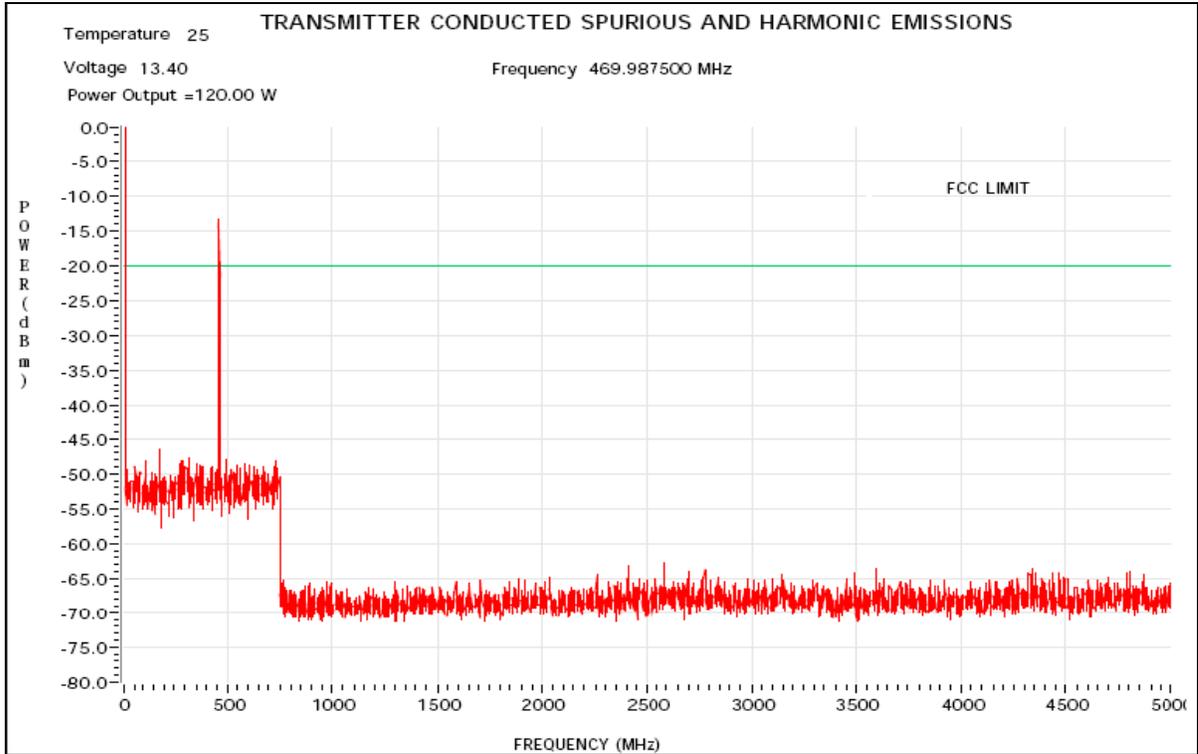


Figure 6F-34: 120W Harmonics of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

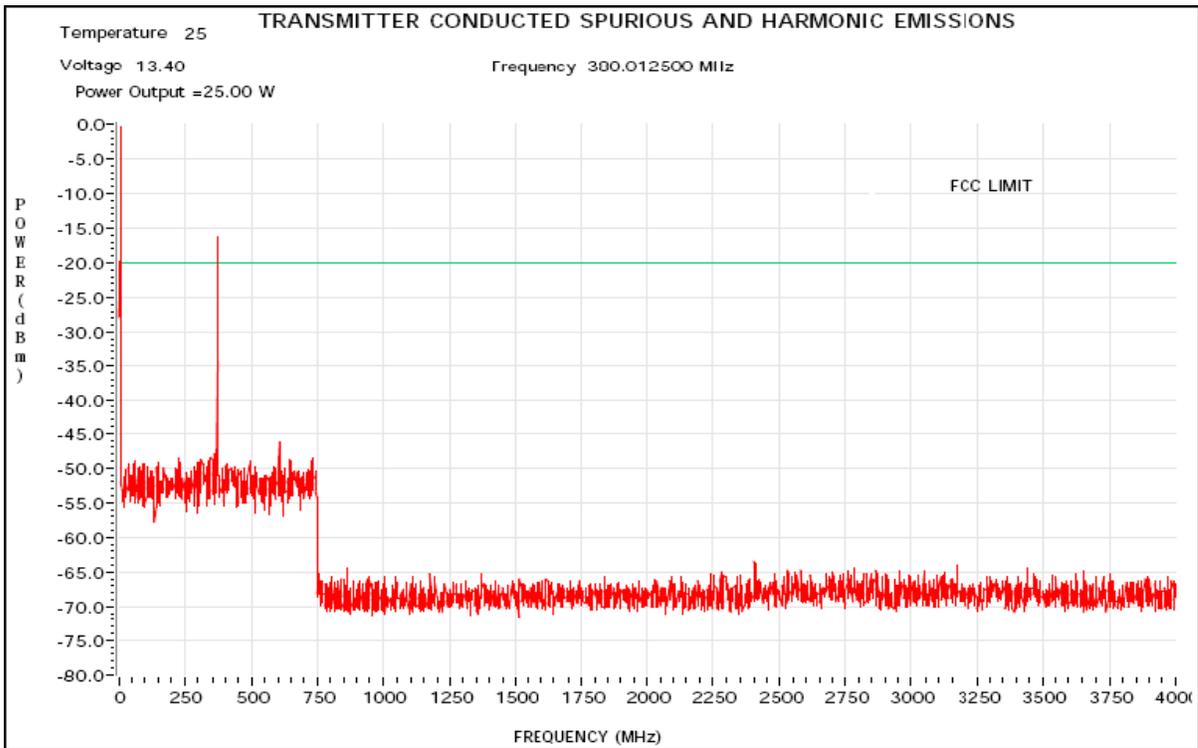


Figure 6F-35: 25W Harmonics of Carrier 380.0125 MHz, 12.5 kHz Channel Spacing

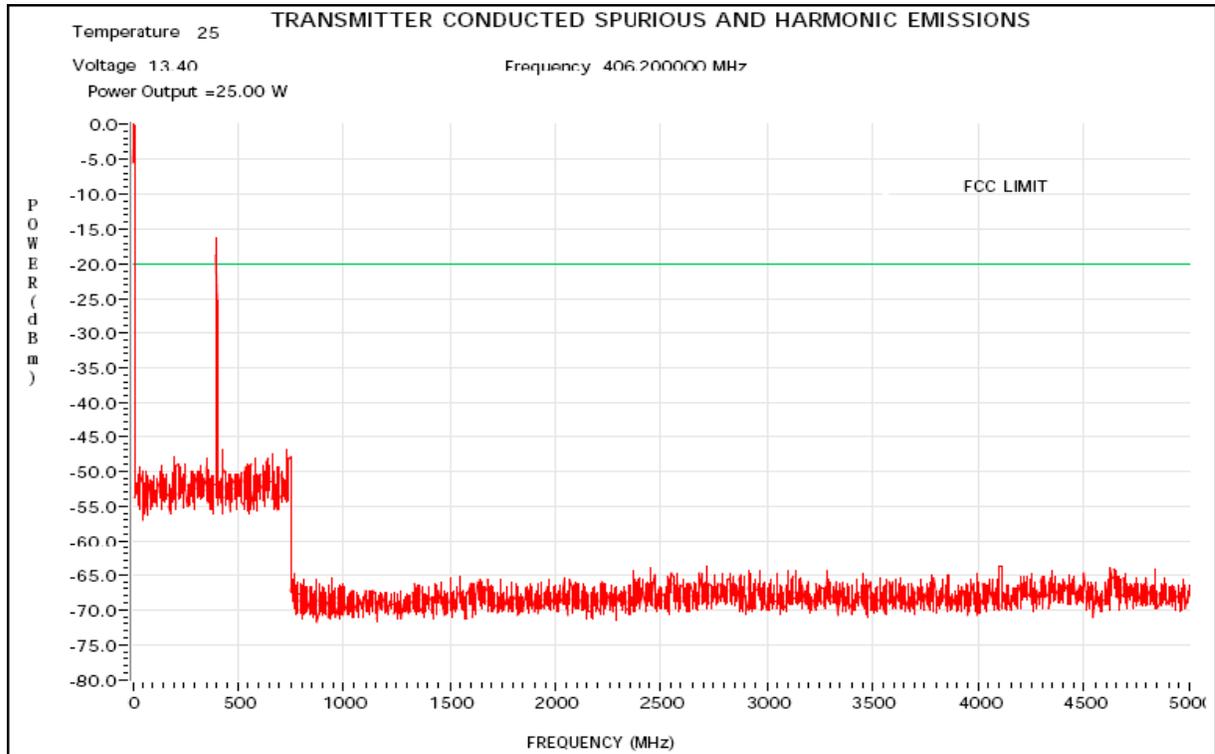


Figure 6F-36: 25W Harmonics of Carrier 406.2 MHz, 12.5 kHz Channel Spacing

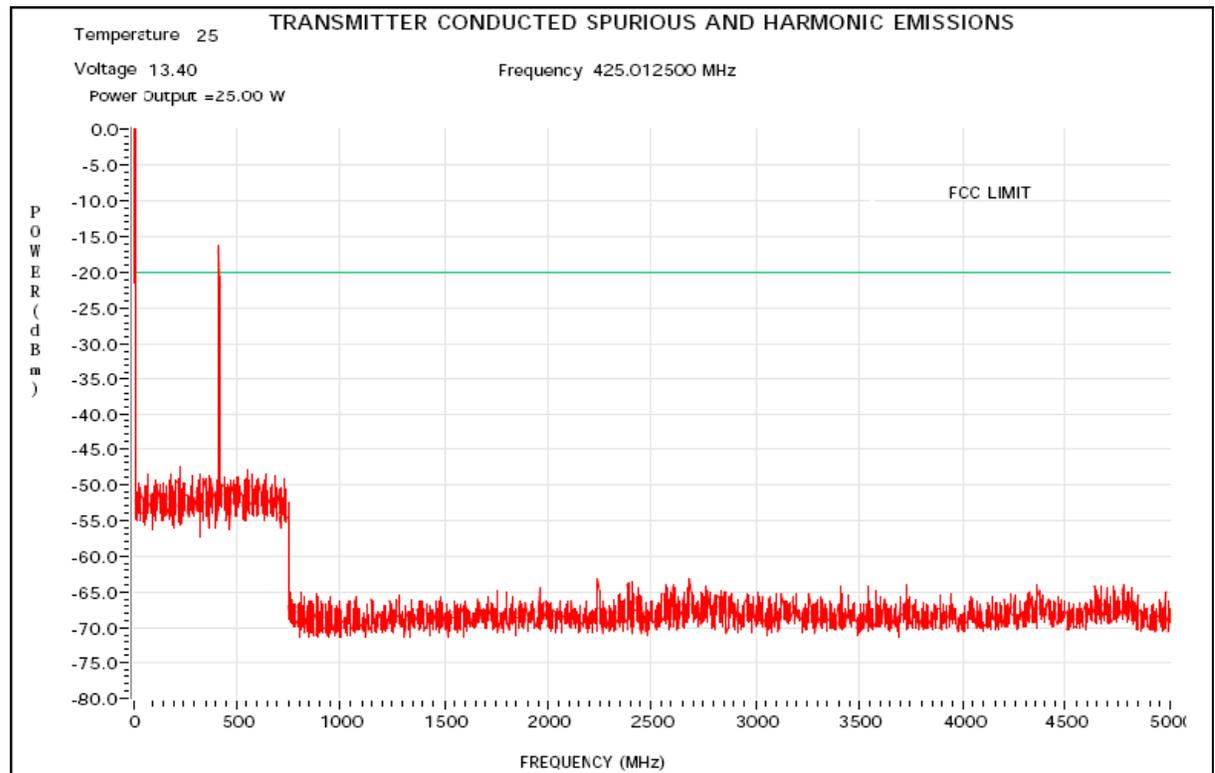


Figure 6F-37: 25W Harmonics of Carrier 425.0125 MHz, 12.5 kHz Channel Spacing

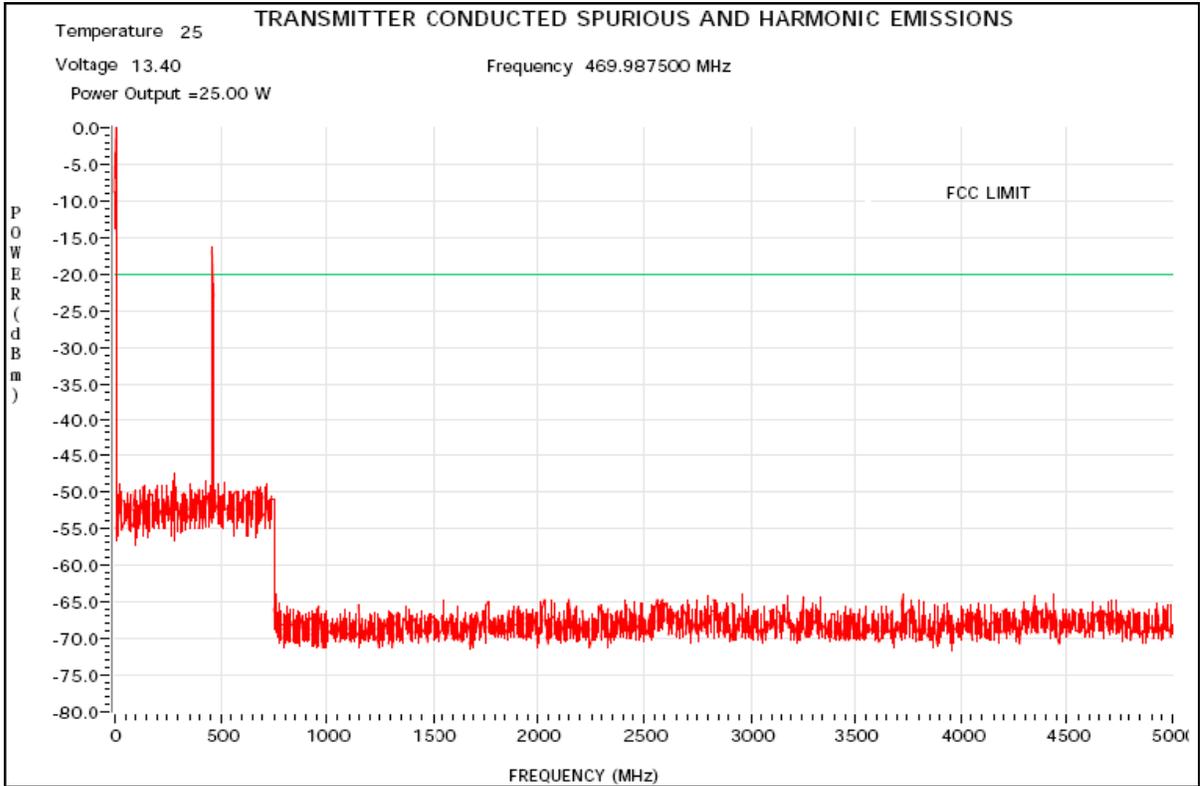


Figure 6F-38: 25W Harmonics of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

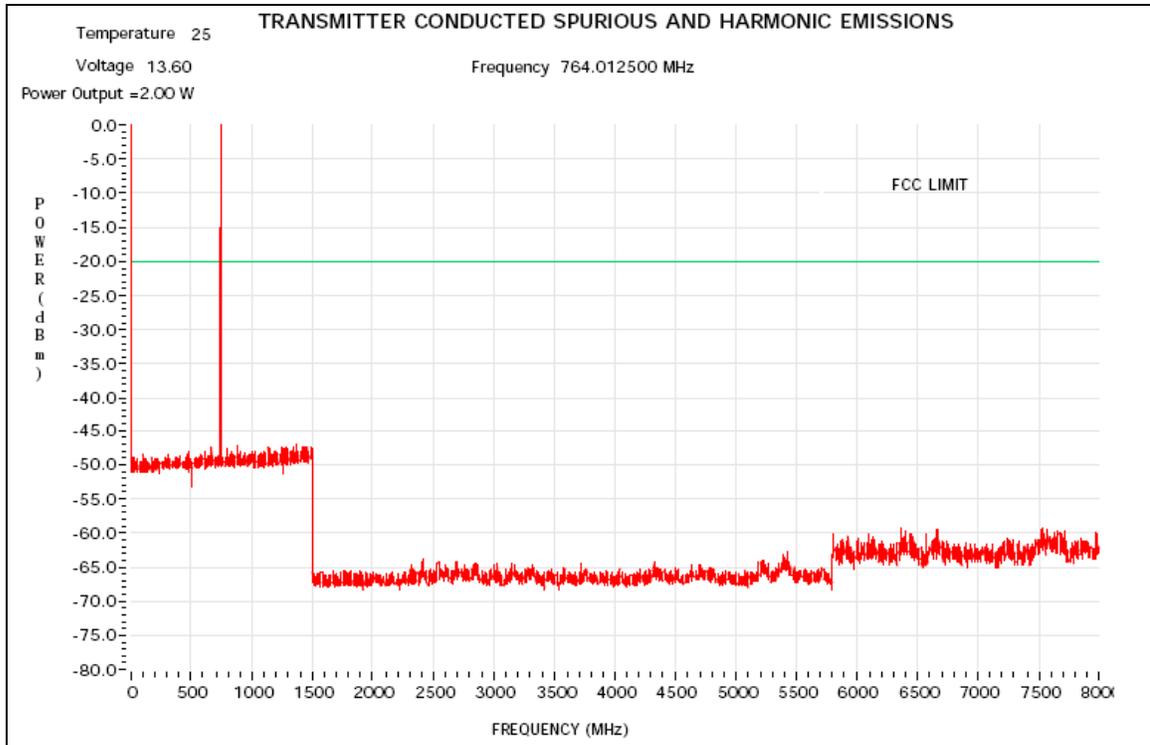


Figure 6F-39: 2 Watts Harmonic of Carrier 764.0125 MHz

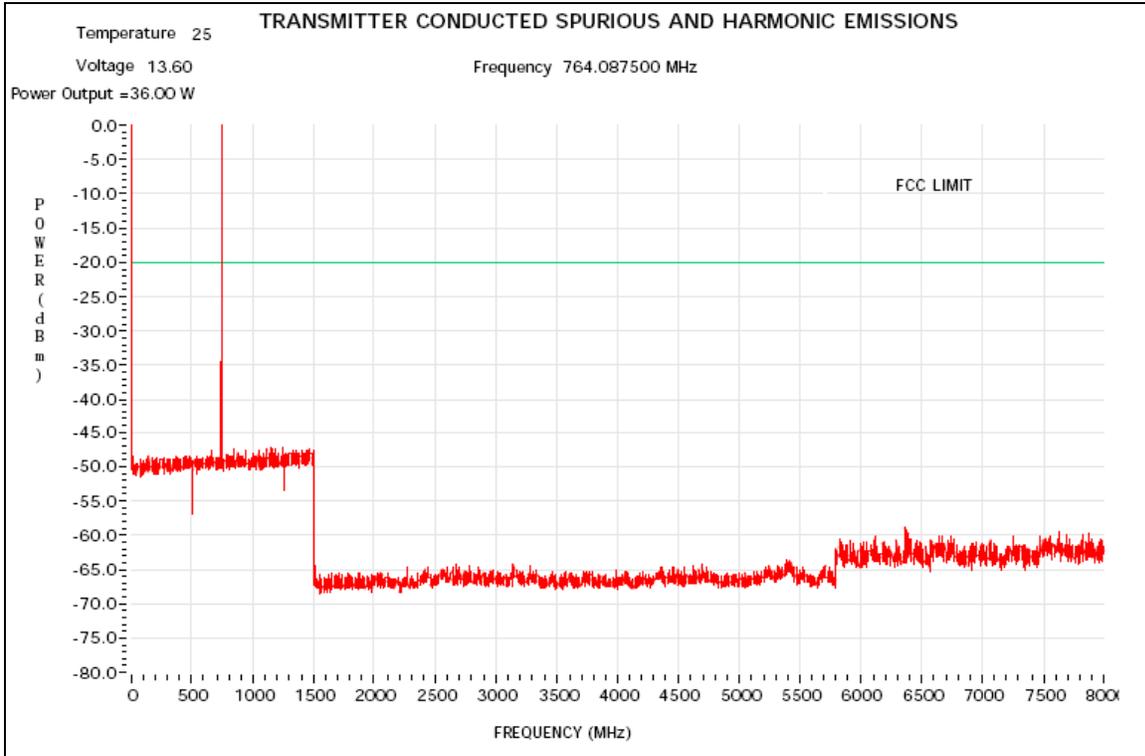


Figure 6F-40: 36 Watts Harmonic of Carrier 764.0875 MHz

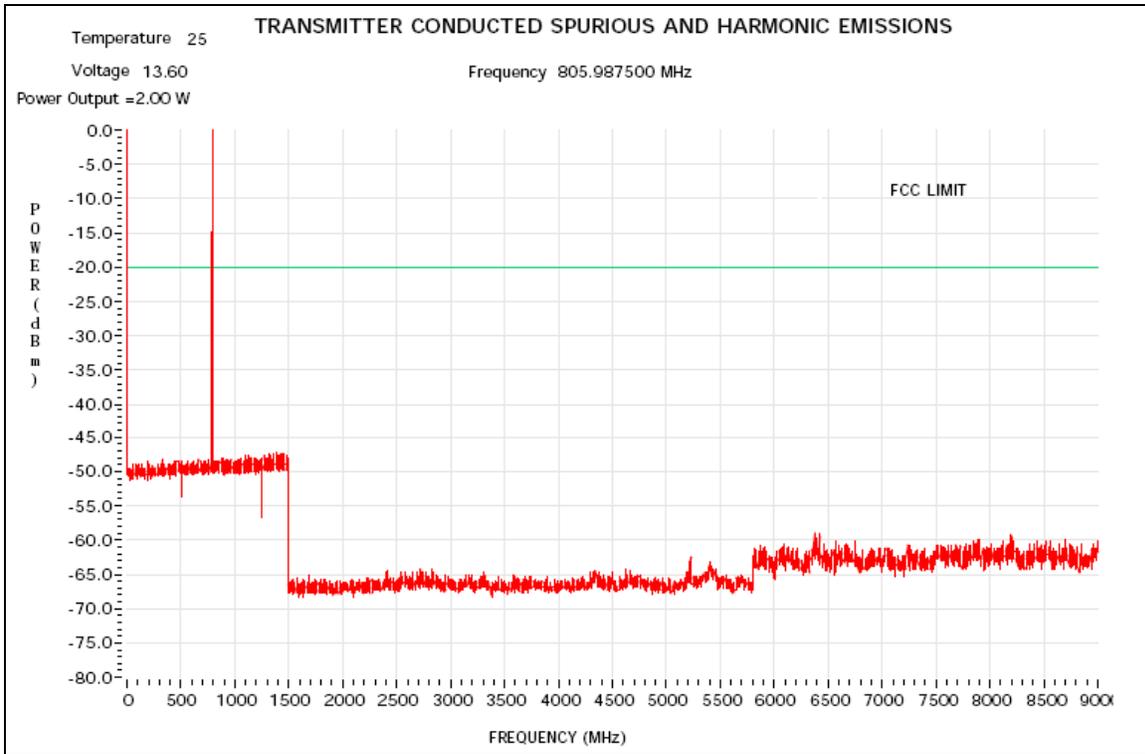


Figure 6F-41: 2 Watts Harmonic of Carrier 805.9875 MHz

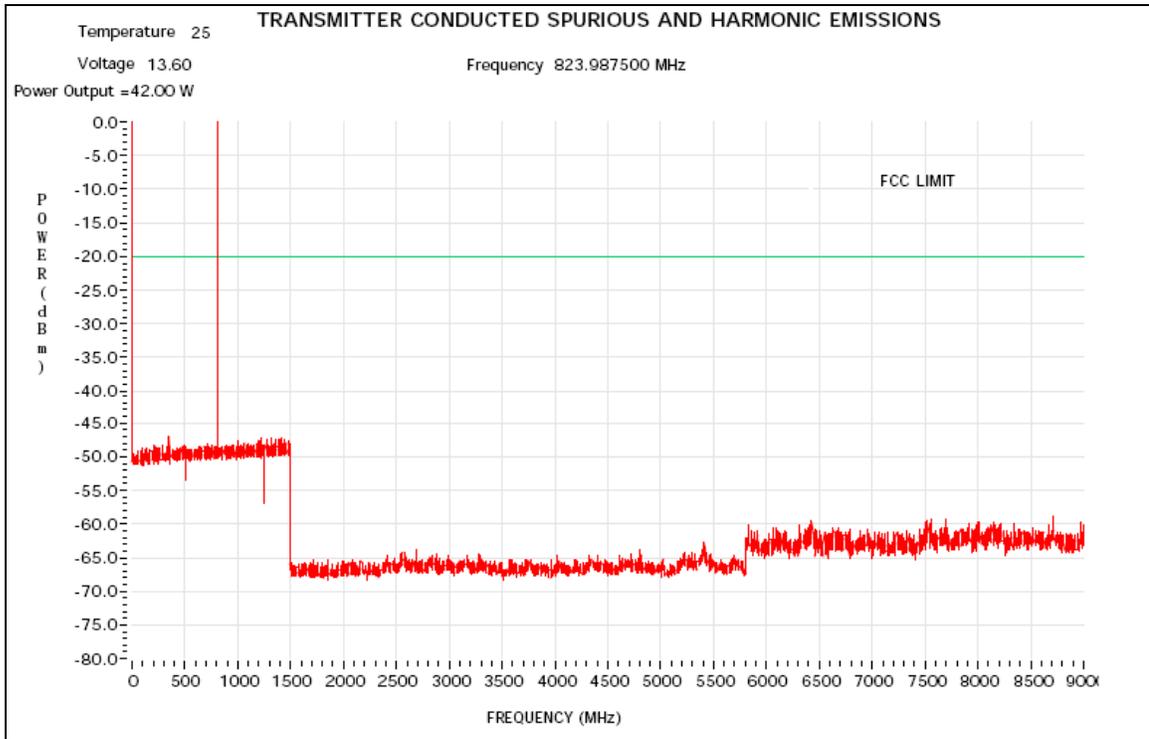


Figure 6F-42: 42 Watts Harmonic of Carrier 823.9875 MHz

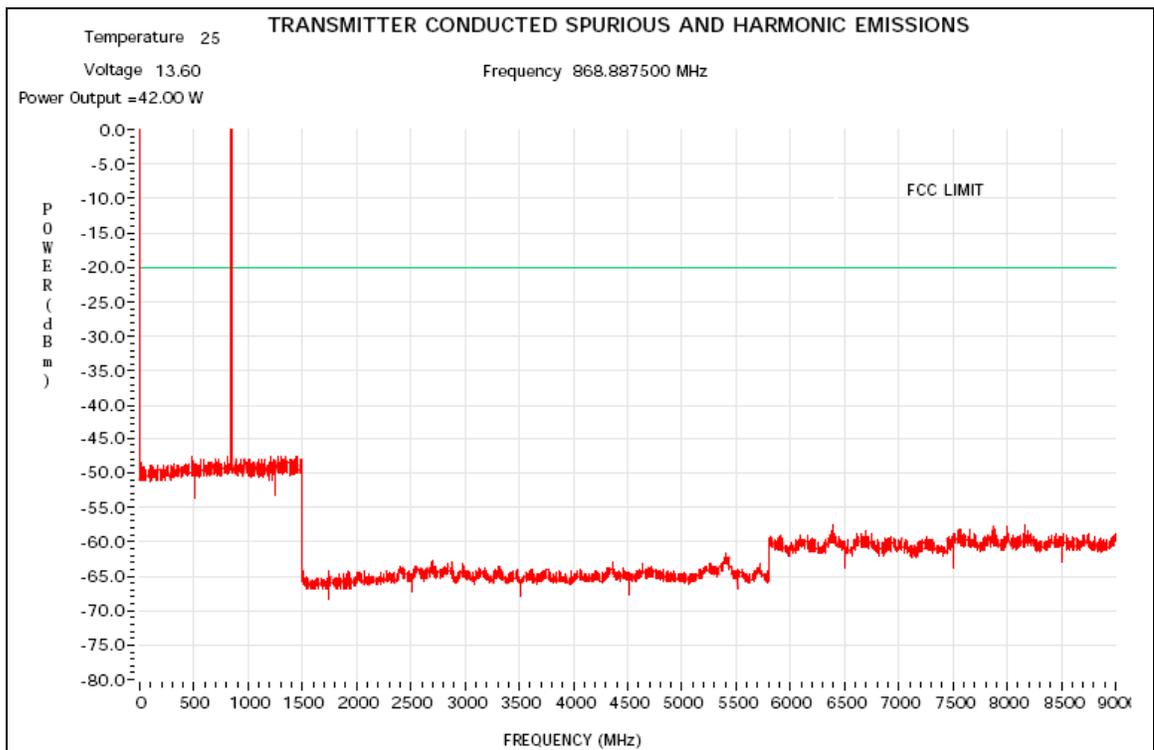


Figure 6F-43: 43 Watts Harmonic of Carrier 868.8875 MHz

EXHIBIT 6G

Radiated Spurious Emissions - Pursuant 47 CFR 2.1051 and 2.1033(c) (13)
 UHF Range 1 HP

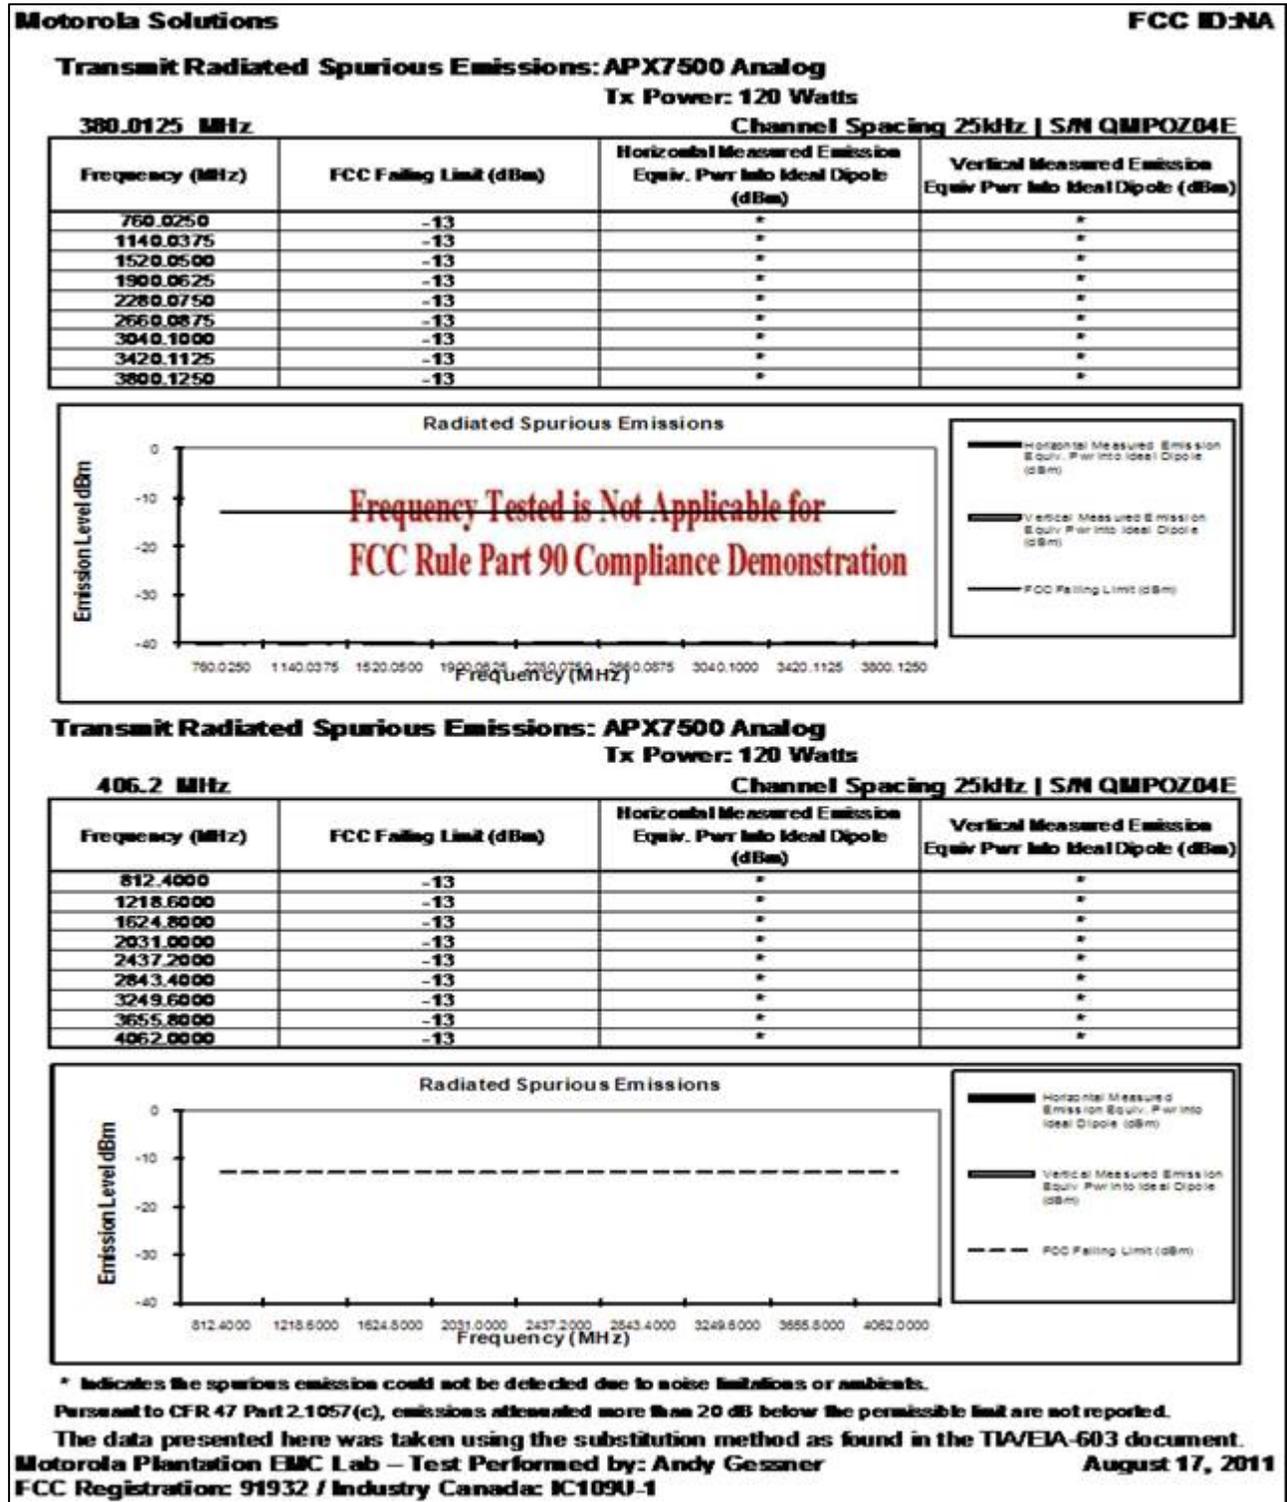


Figure 6G-1: 120W, 380.0125 MHz & 406.2 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)

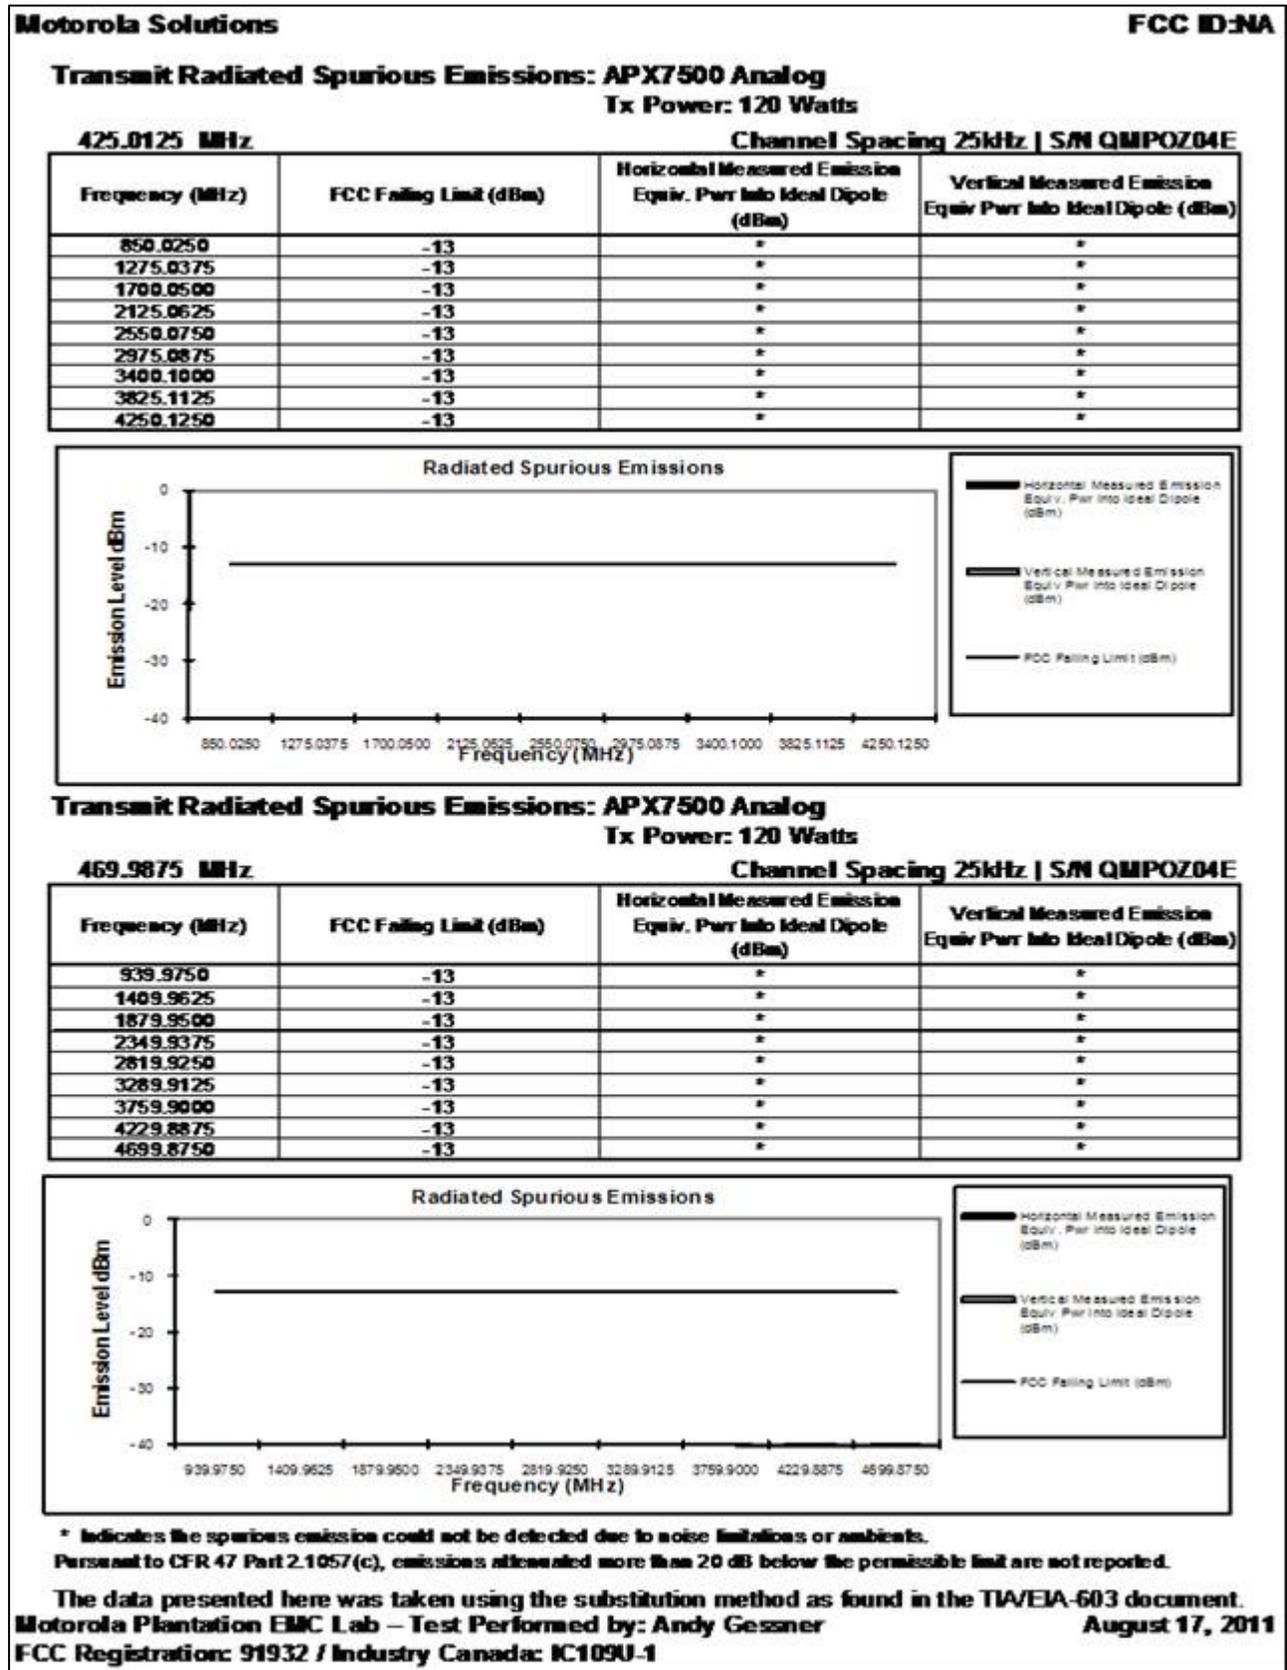


Figure 6G-2: 120W, 425.0125 MHz & 469.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)

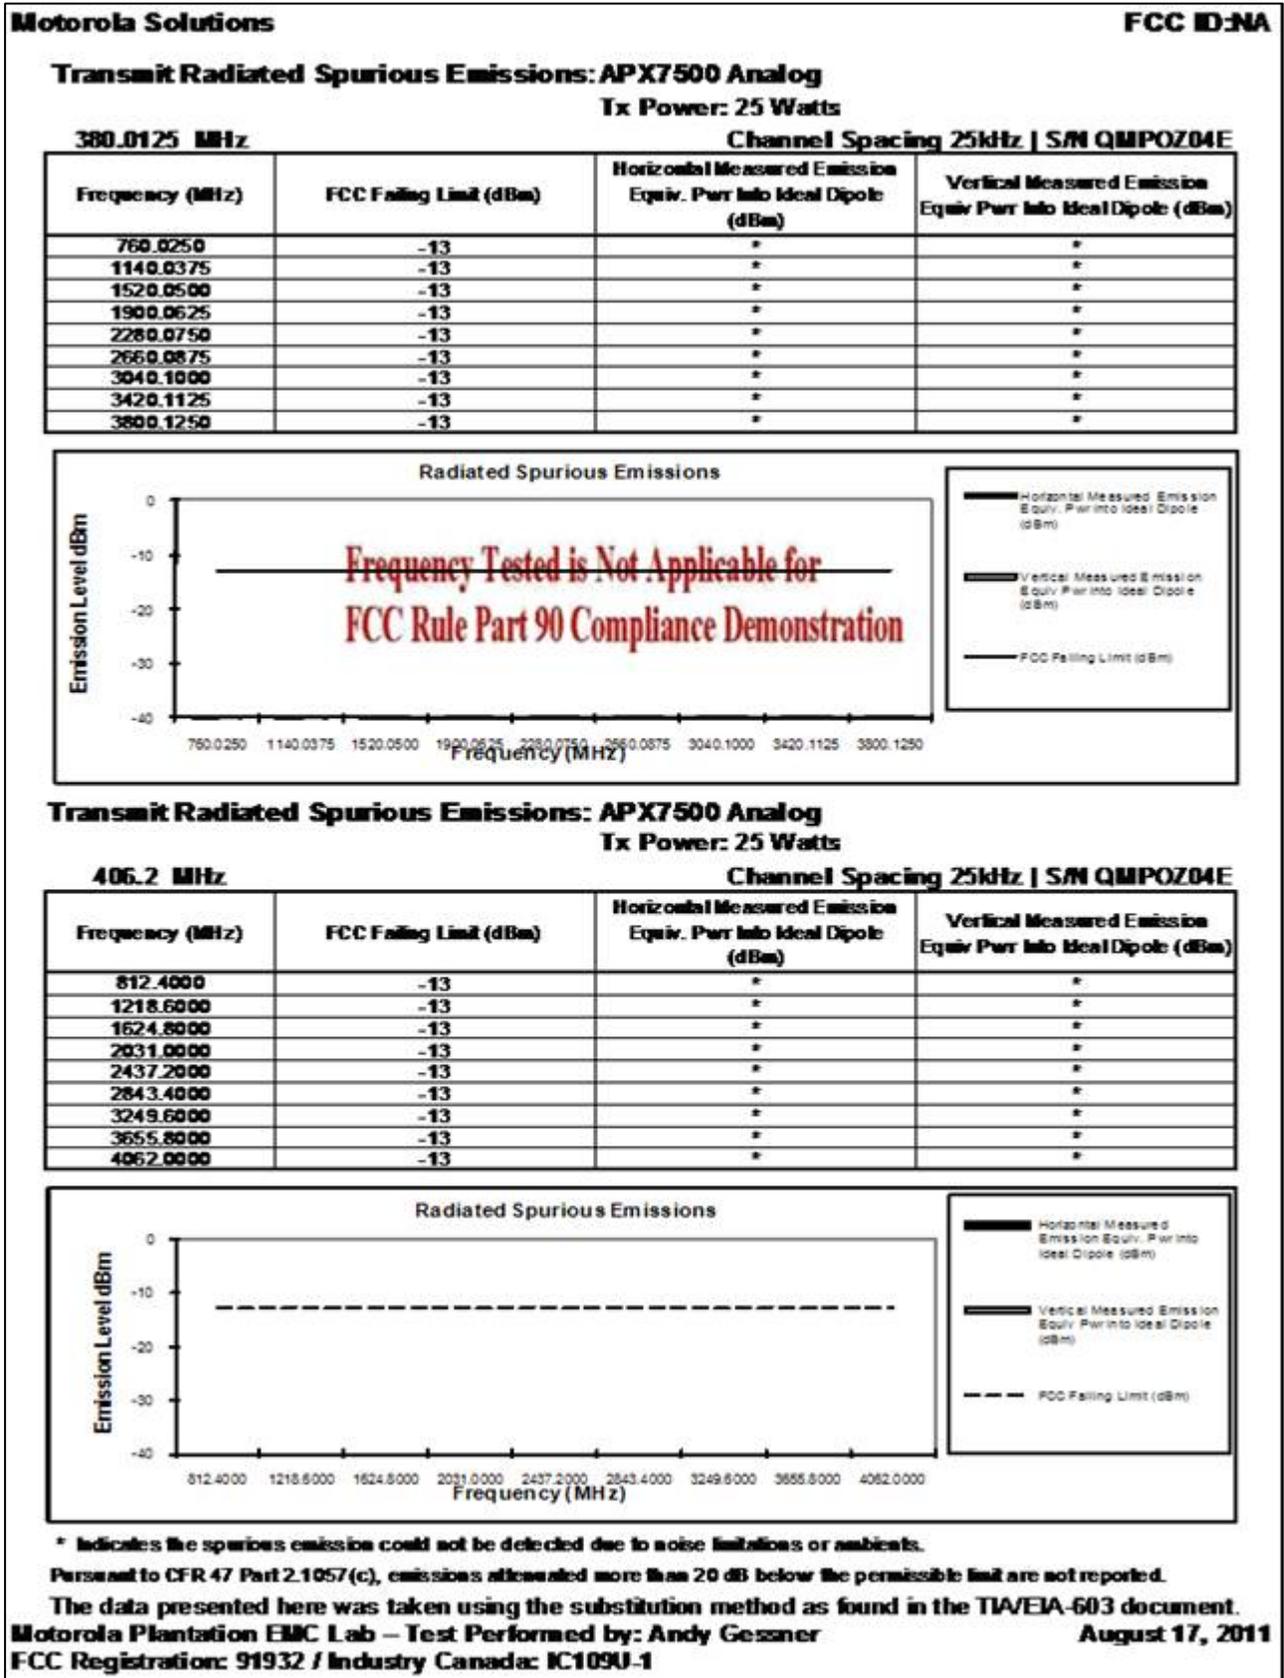


Figure 6G-3: 25W, 380.0125 MHz & 406.2 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)

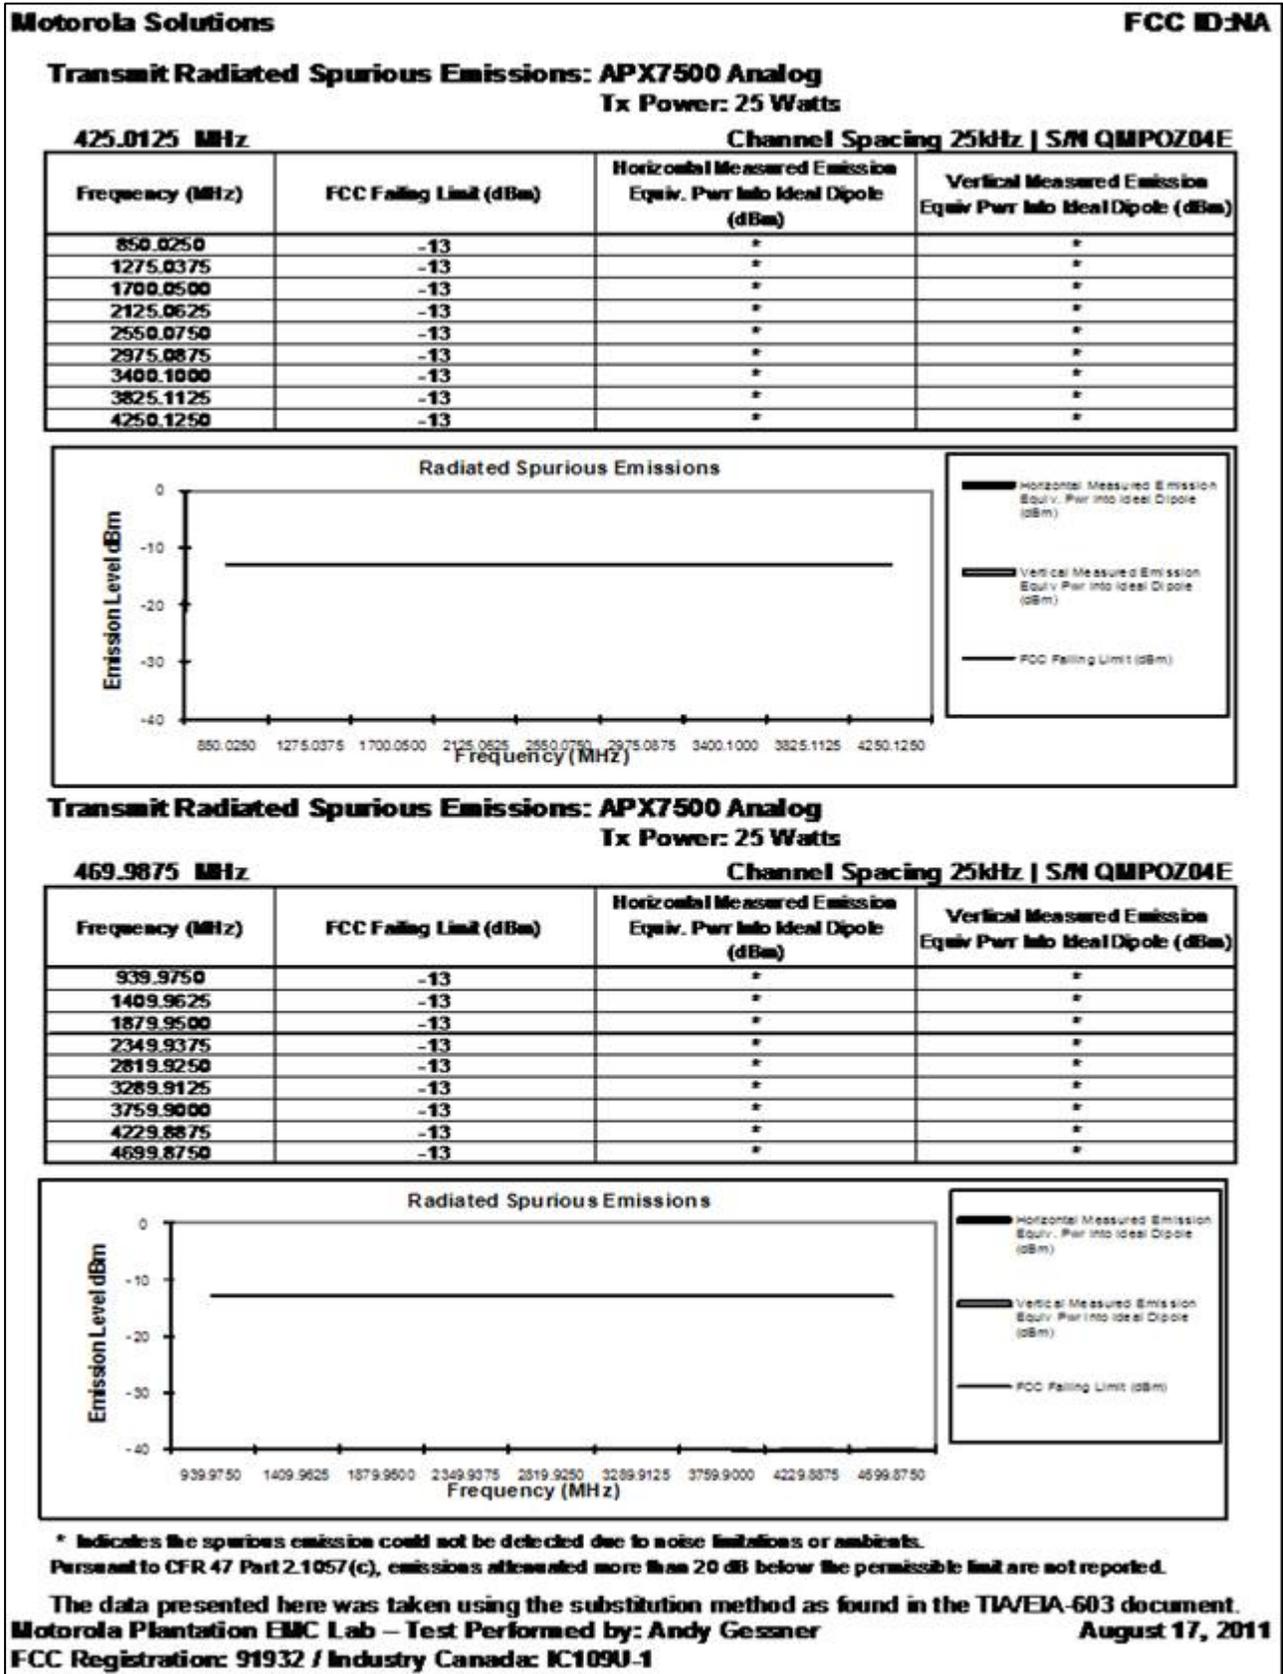


Figure 6G-4: 25W, 425.0125 MHz & 469.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)

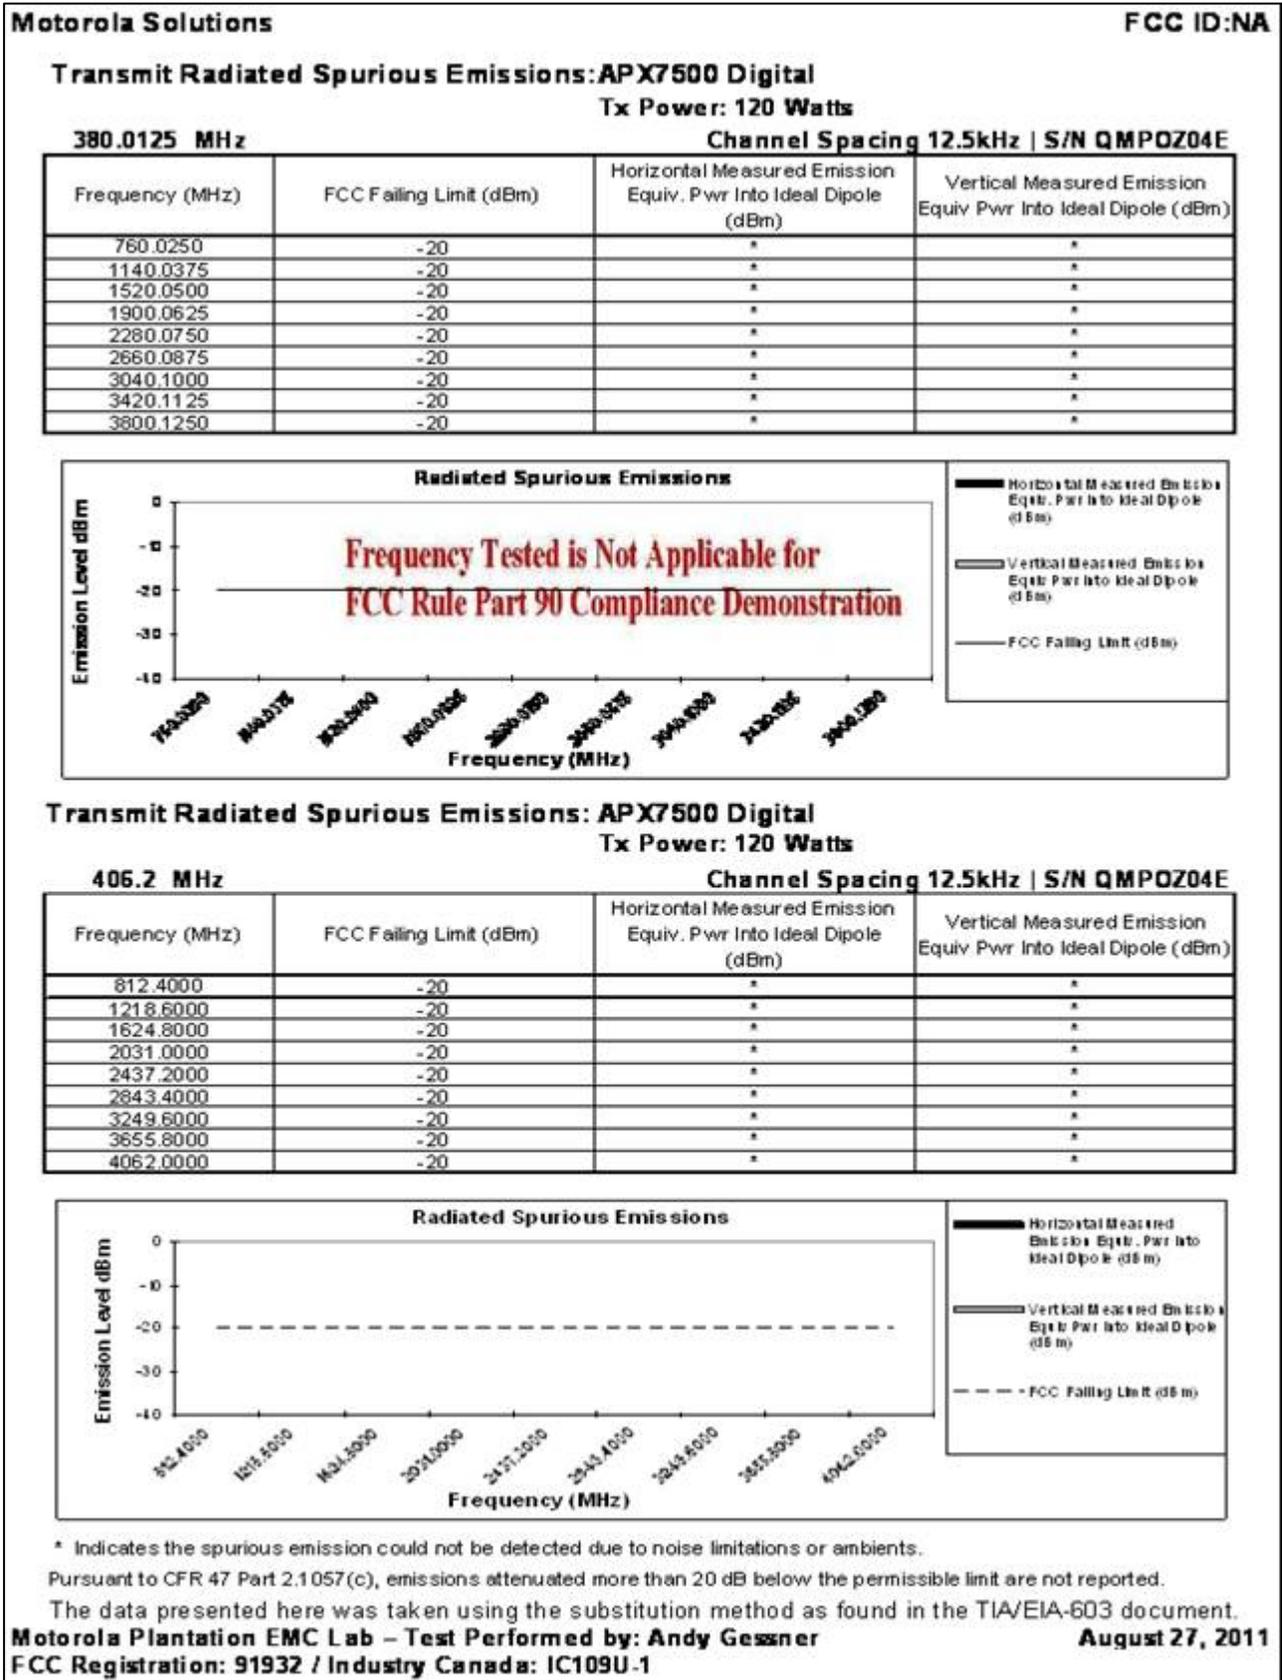


Figure 6G-5: 120W, 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing

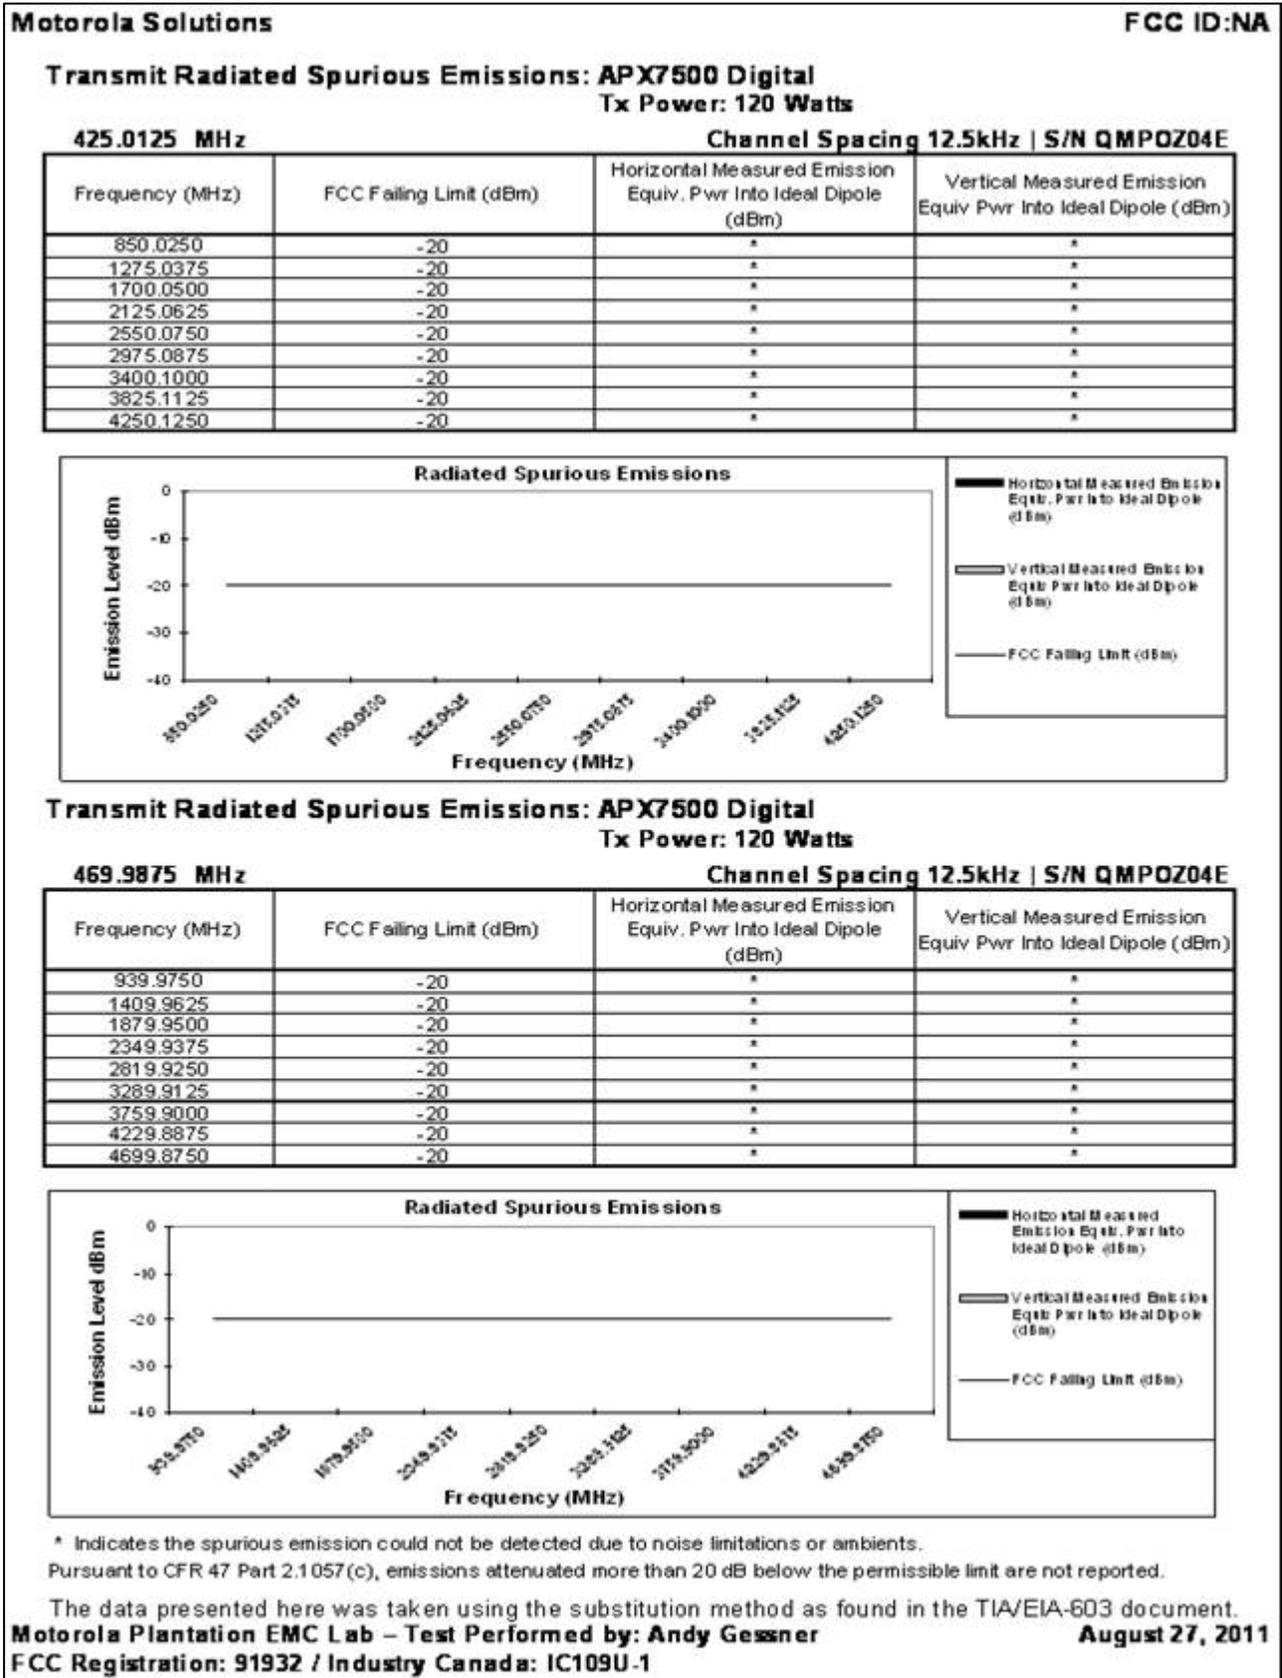


Figure 6G-6: 120W, 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing

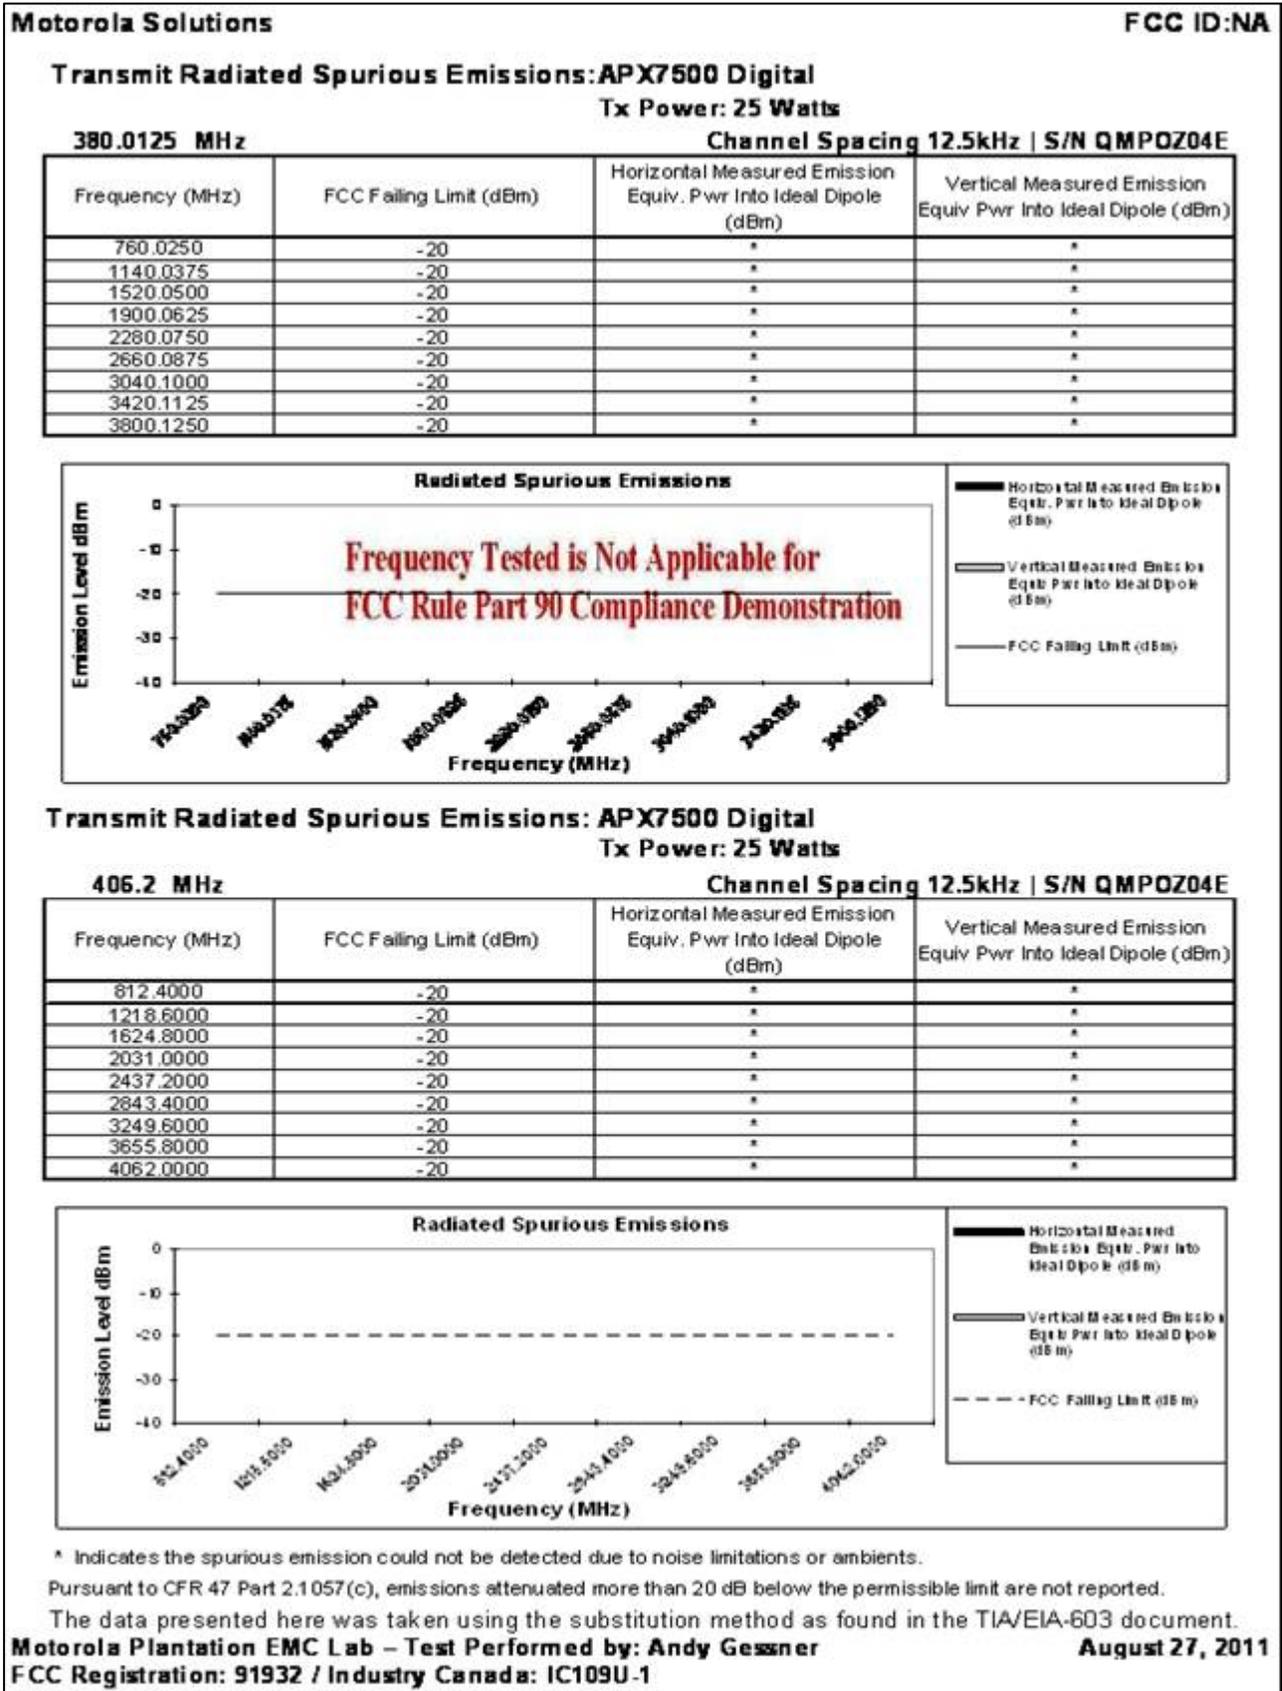


Figure 6G-7: 25W, 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing


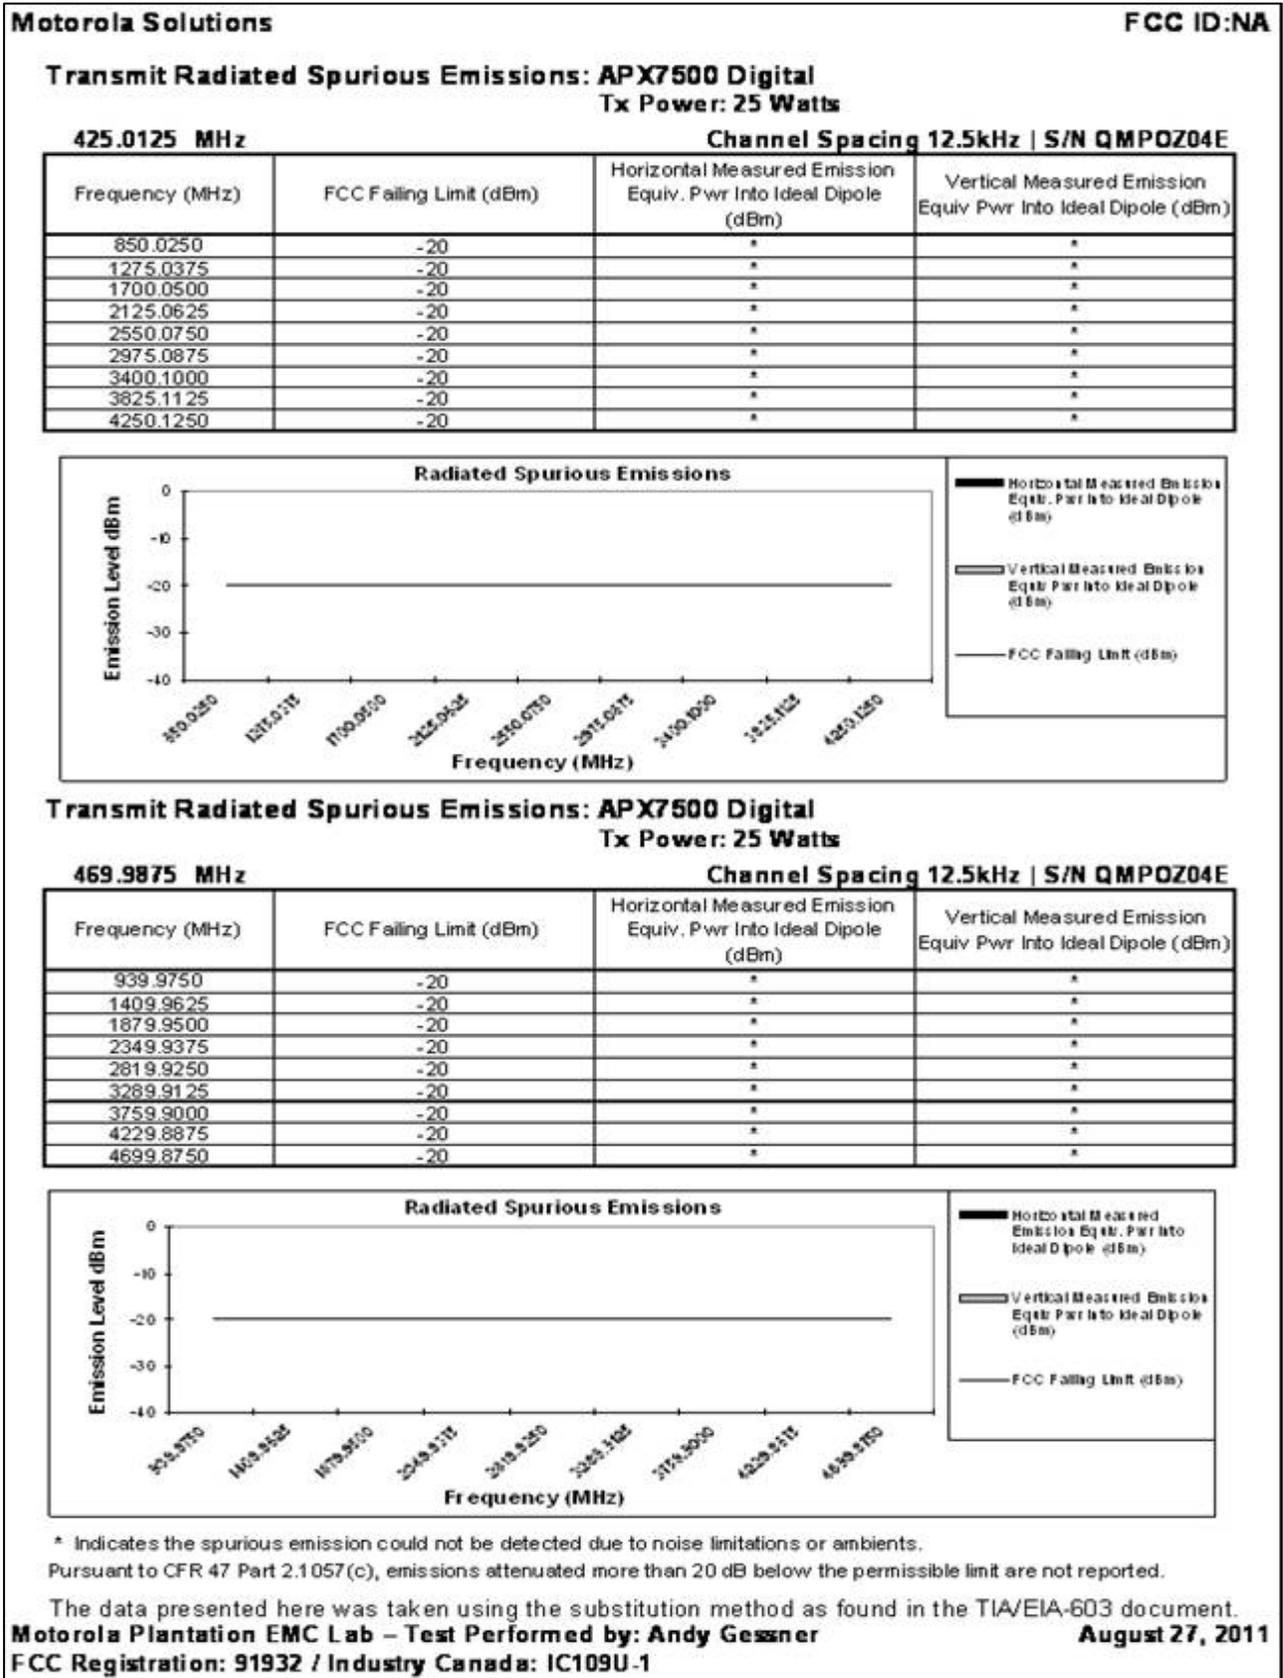


Figure 6G-8: 25W, 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

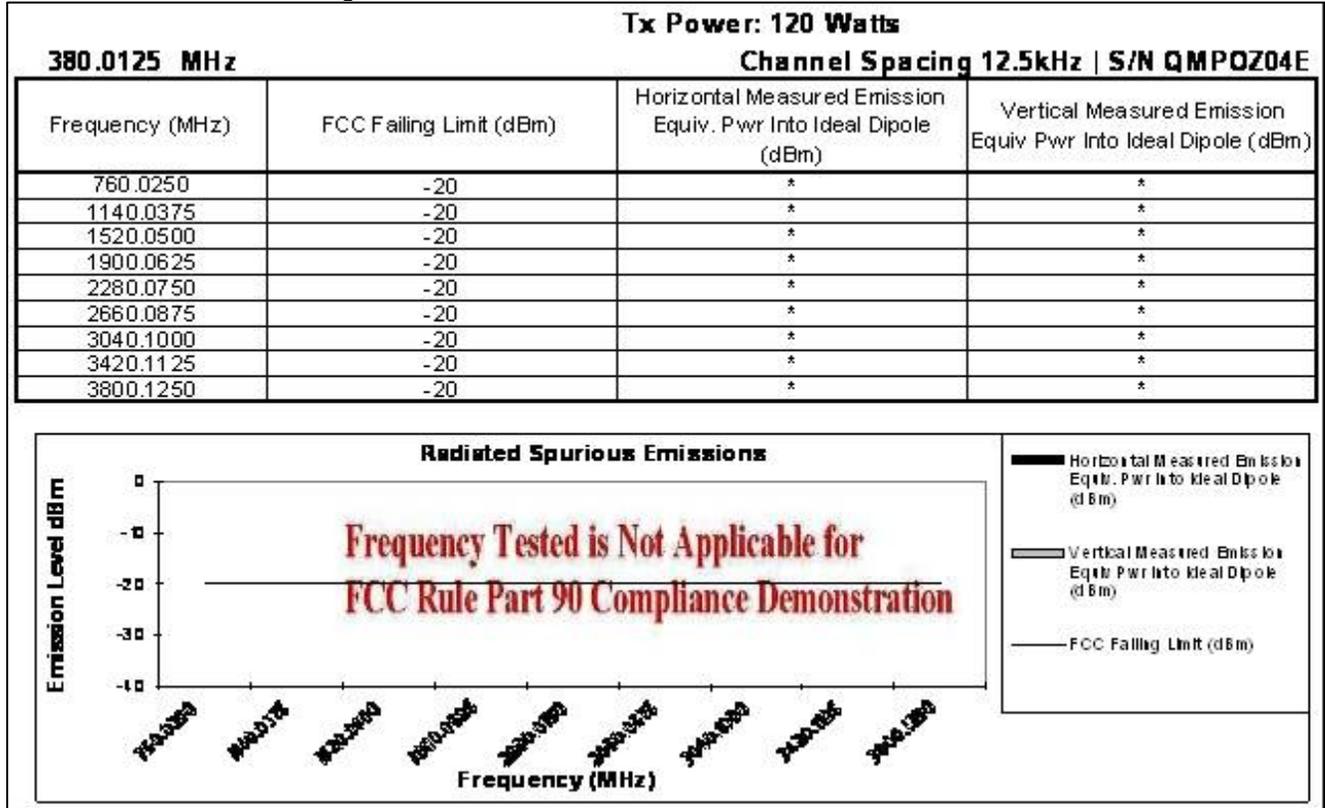

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)



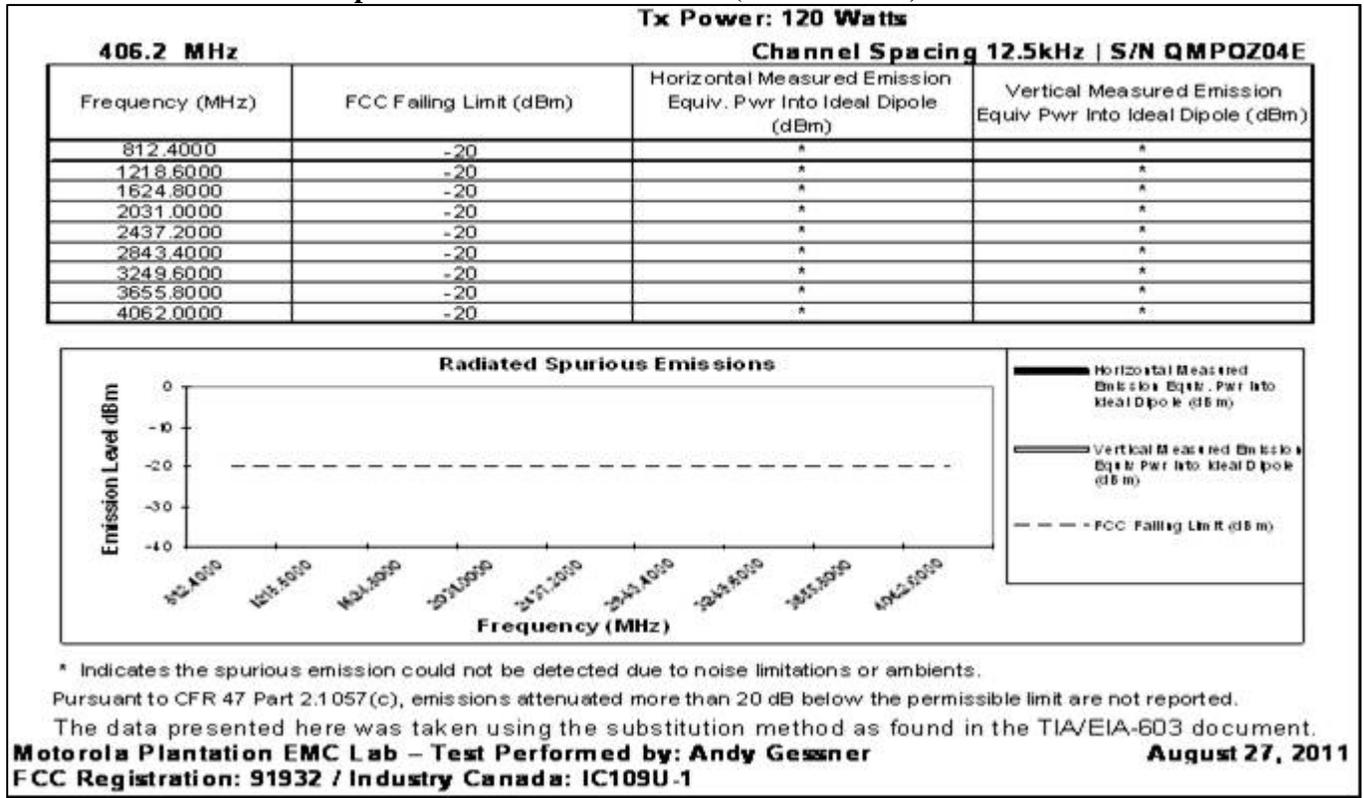


Figure 6G-9: 120W, 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

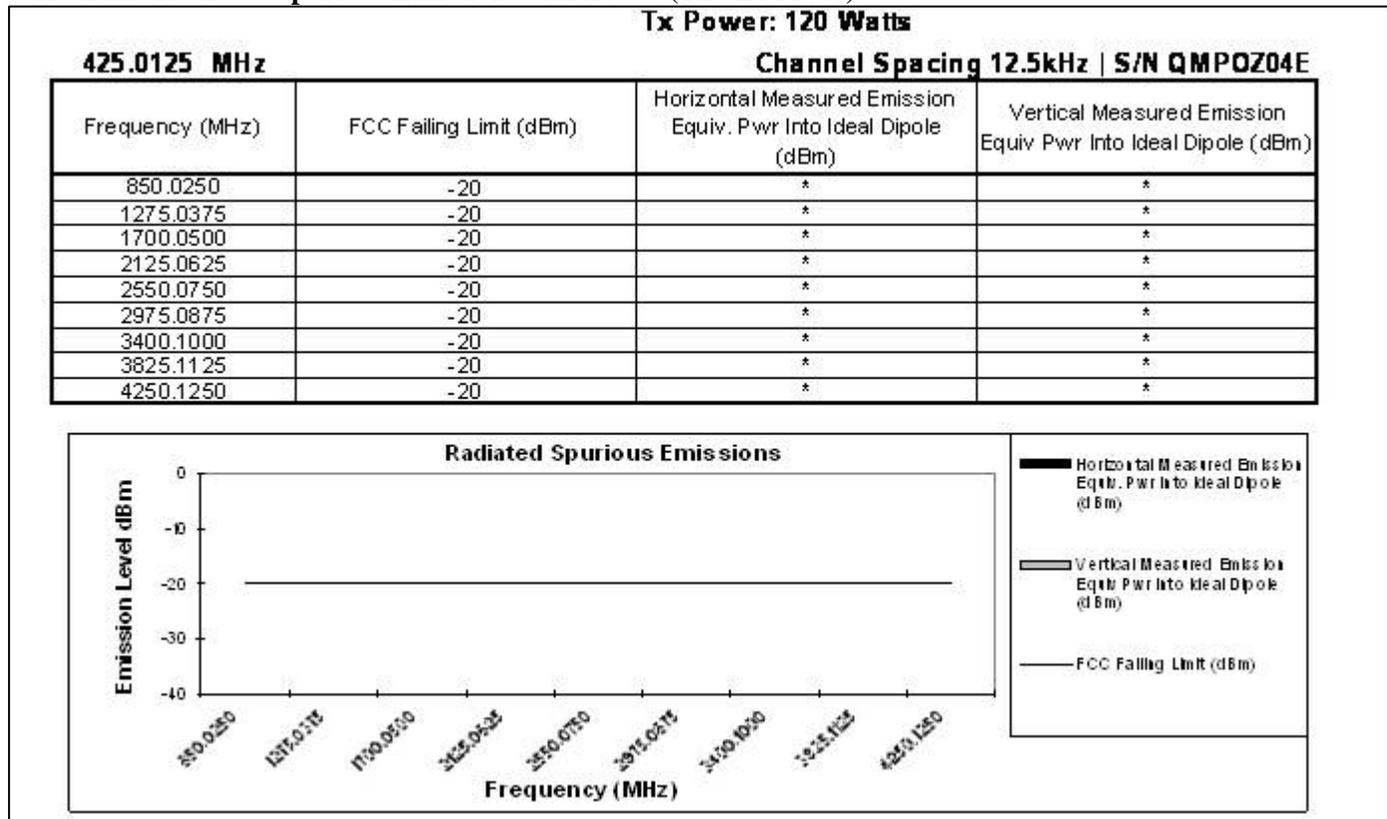

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

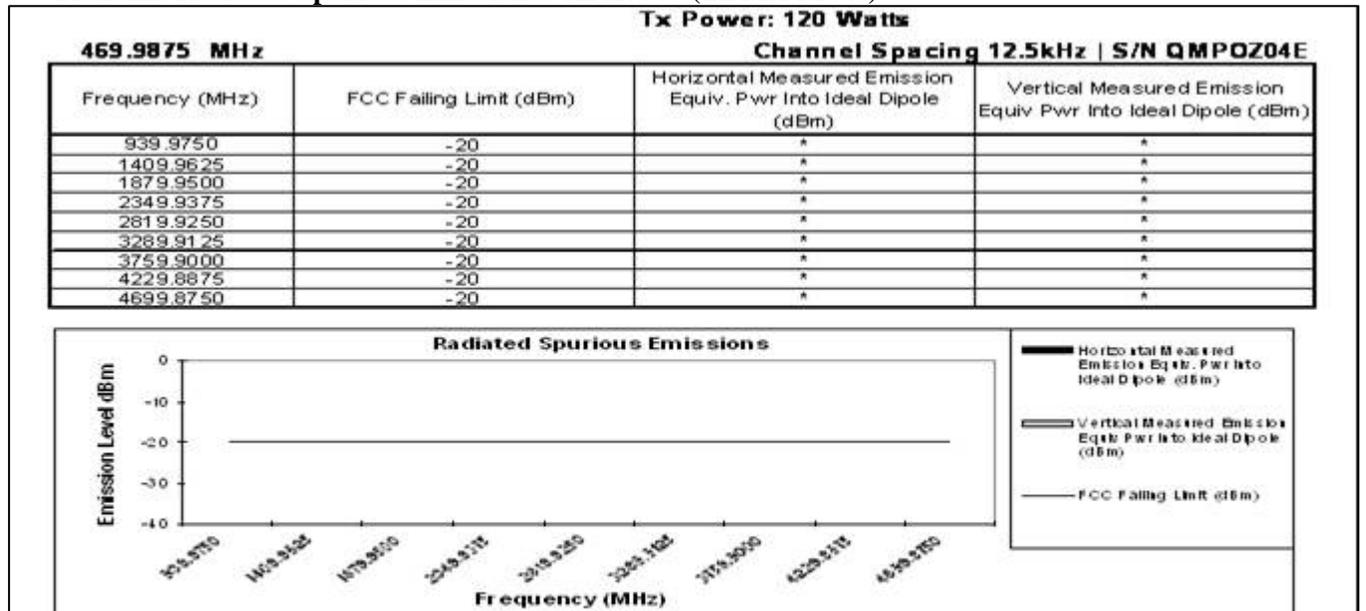


* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Plantation EMC Lab – Test Performed by: Andy Gessner **August 27, 2011**
FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-10: 120W, 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

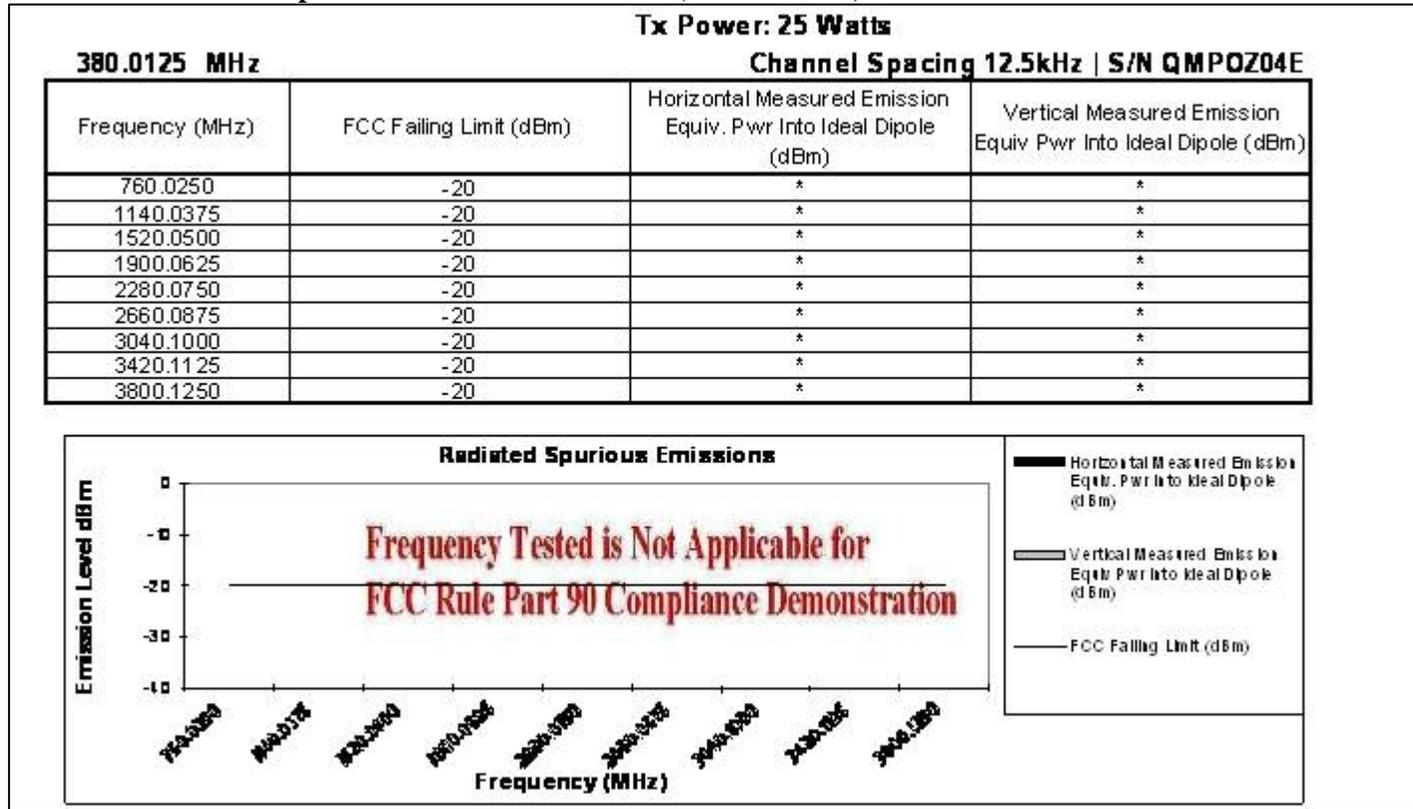

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)


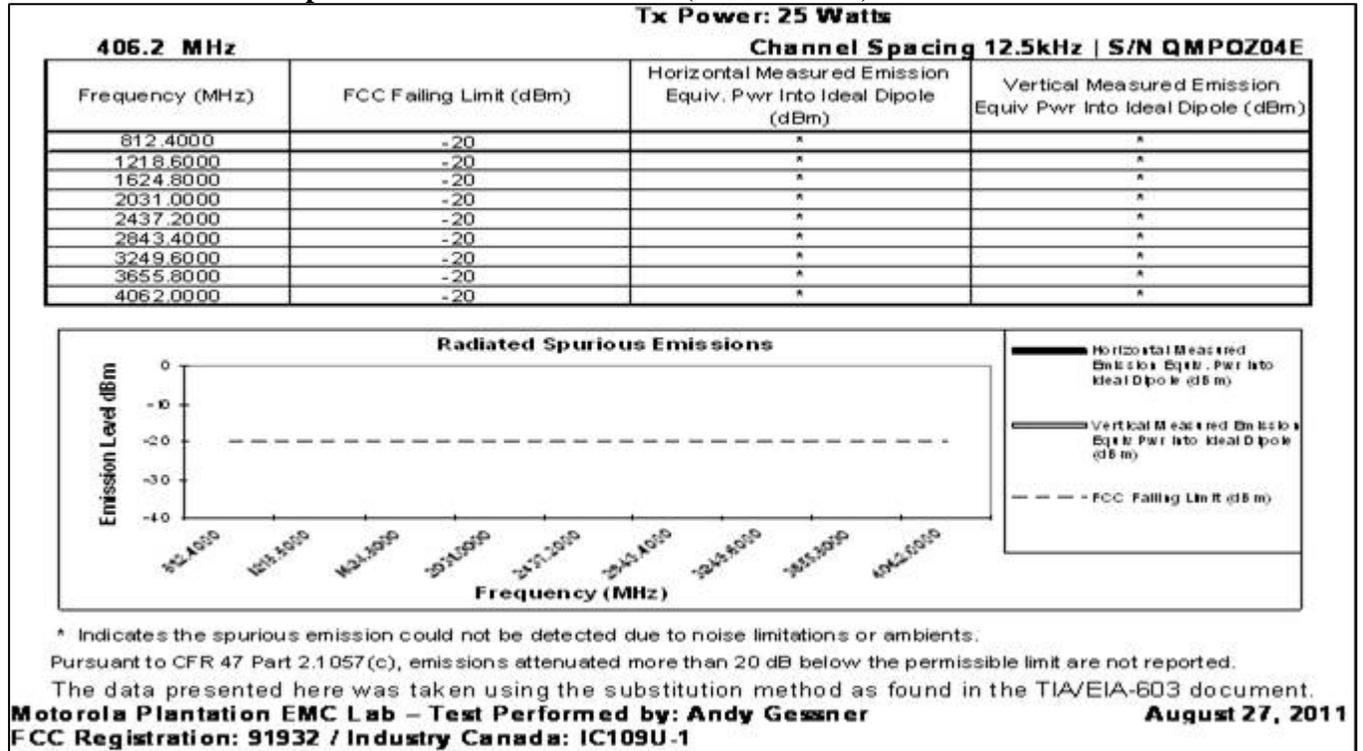


Figure 6G-11: 25W, 380.0125 MHz & 406.2 MHz, 12.5 Channel Spacing

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

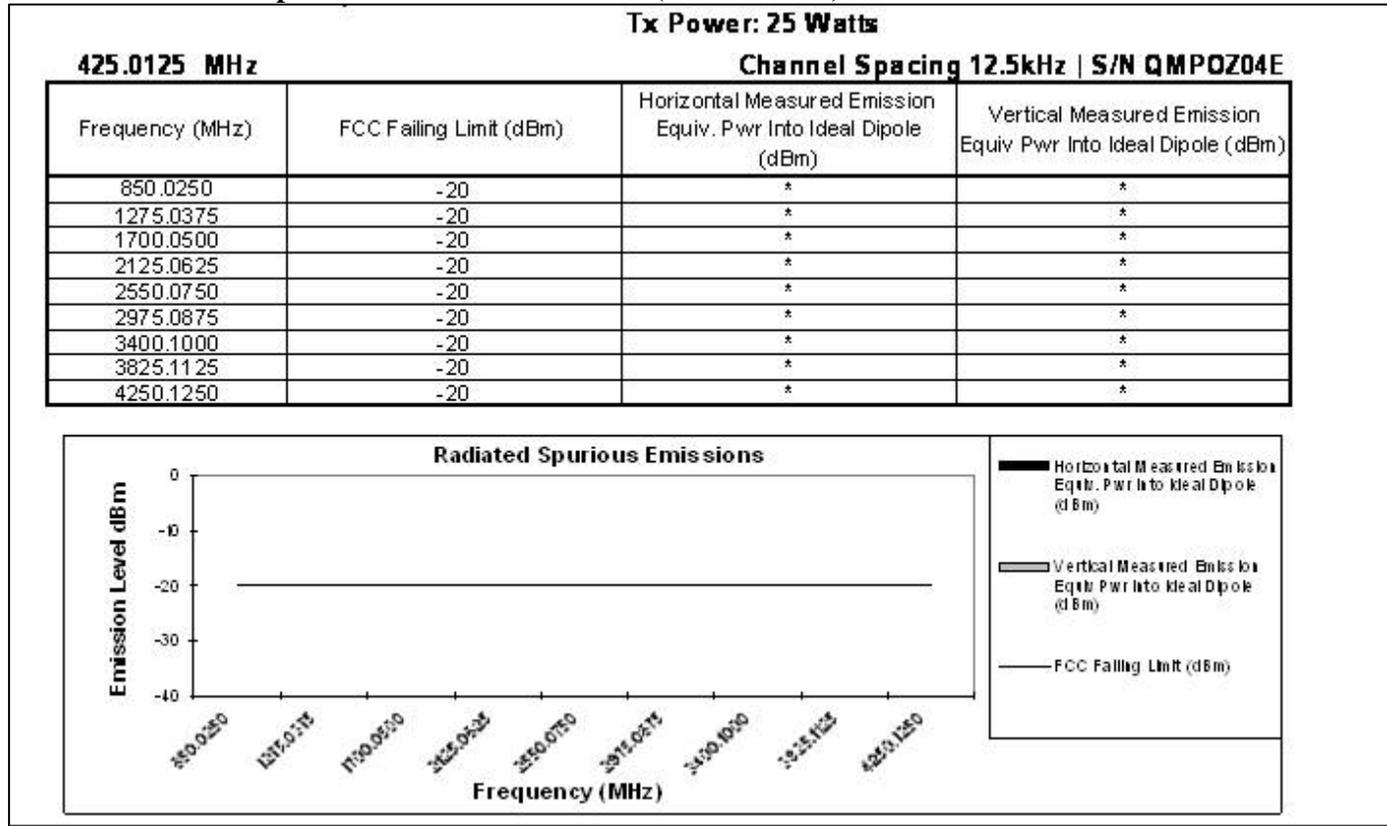

Transmit Radiated Spurious Emissions: APX7500 (TDMA Mode)

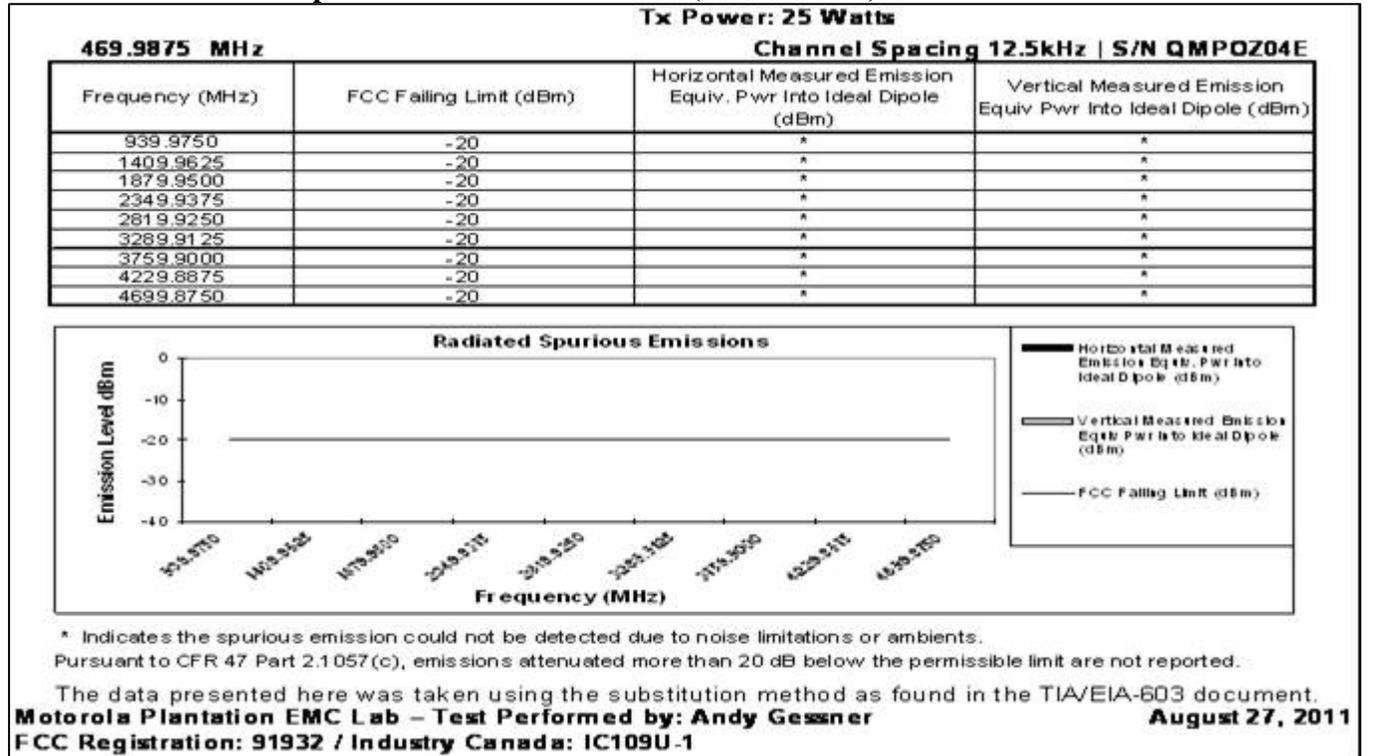


Figure 6G-12: 25W, 425.0125 MHz & 469.9875 MHz, 12.5 Channel Spacing

7/800

Motorola Solutions

FCC ID: NA


Transmit Radiated Spurious Emissions: APX7500 Analog

Tx Power: 36 Watts

764.0875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
1528.1750	-13	*	*
2292.2625	-13	*	*
3056.3500	-13	*	*
3820.4375	-13	*	*
4584.5250	-13	*	*
5348.6125	-13	*	*
6112.7000	-13	*	*
6876.7875	-13	*	*
7640.8750	-13	*	*

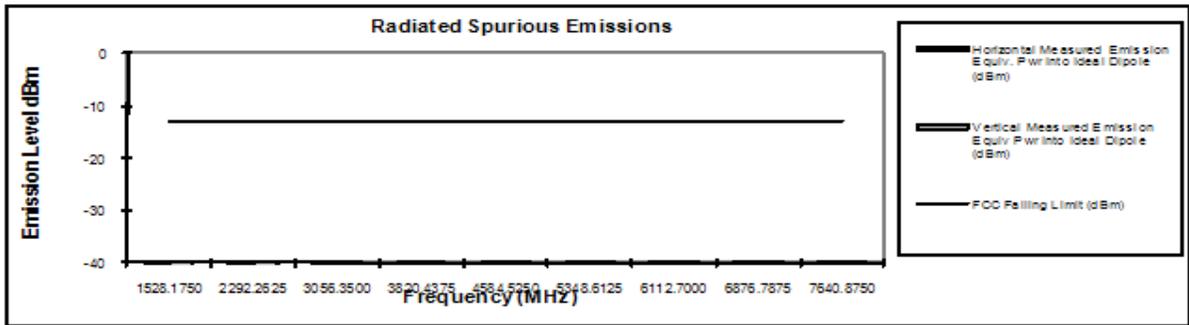


Transmit Radiated Spurious Emissions: APX7500 Analog

Tx Power: 36 Watts

794.0875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
1588.1750	-13	*	*
2382.2625	-13	*	*
3176.3500	-13	*	*
3970.4375	-13	*	*
4764.5250	-13	*	*
5558.6125	-13	*	*
6352.7000	-13	*	*
7146.7875	-13	*	*
7940.8750	-13	*	*

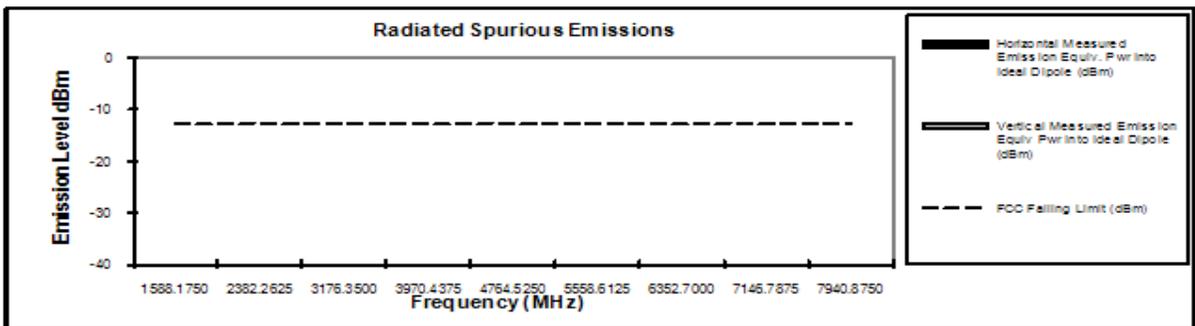

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

August 29, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-13: 36 Watts, 764.0875 & 794.0875 MHz, 25 kHz Channel Spacing

Motorola Solutions


FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 42 Watts

806.0125 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-13	*	*
2418.0375	-13	*	*
3224.0500	-13	*	*
4030.0625	-13	*	*
4836.0750	-13	*	*
5642.0875	-13	*	*
6448.1000	-13	*	*
7254.1125	-13	*	*
8060.1250	-13	*	*

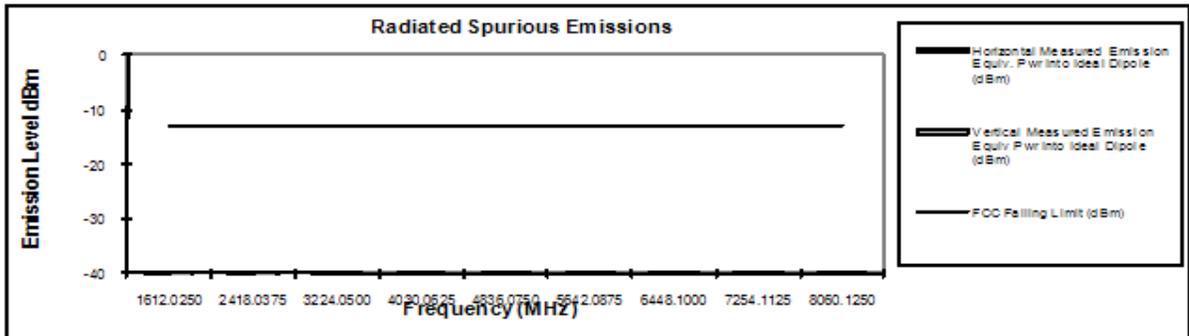


Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 42 Watts

868.8875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-13	*	*
2606.6625	-13	*	*
3475.5500	-13	*	*
4344.4375	-13	*	*
5213.3250	-13	*	*
6082.2125	-13	*	*
6951.1000	-13	*	*
7819.9875	-13	*	*
8688.8750	-13	*	*

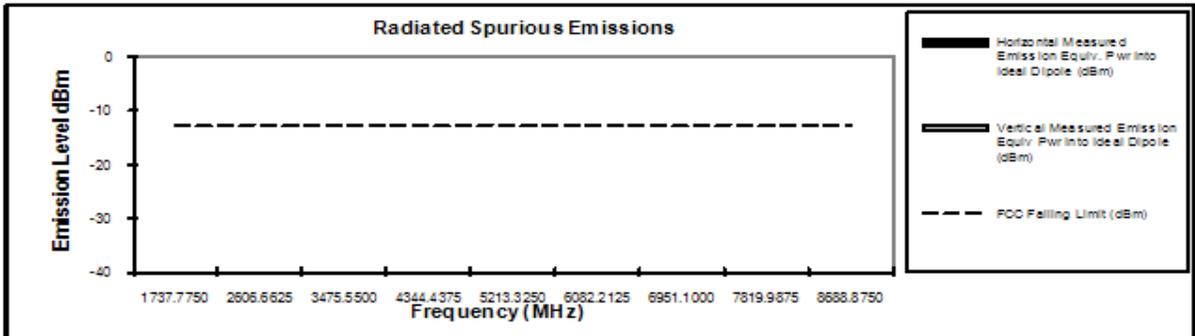

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

August 29, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-14: 42 Watts, 806.0125 & 868.8875 MHz, 25 kHz Channel Spacing

Motorola Solutions


FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 2 Watts

764.0875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-13	*	*
2292.2625	-13	*	*
3056.3500	-13	*	*
3820.4375	-13	*	*
4584.5250	-13	*	*
5348.6125	-13	*	*
6112.7000	-13	*	*
6876.7875	-13	*	*
7640.8750	-13	*	*

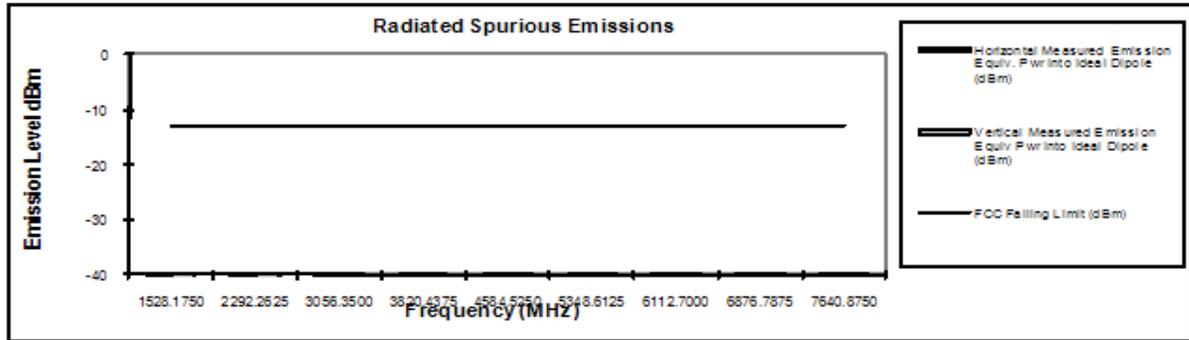


Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 2 Watts

794.0875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.1750	-13	*	*
2382.2625	-13	*	*
3176.3500	-13	*	*
3970.4375	-13	*	*
4764.5250	-13	*	*
5558.6125	-13	*	*
6352.7000	-13	*	*
7146.7875	-13	*	*
7940.8750	-13	*	*

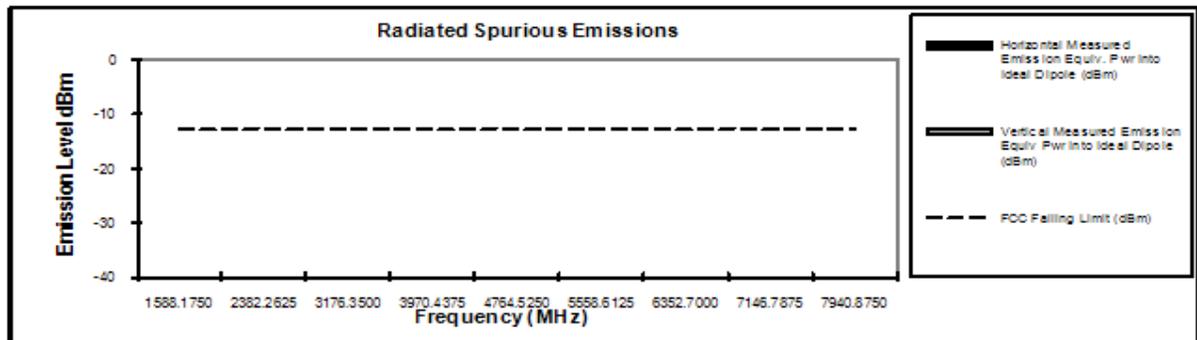

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner
 FCC Registration: 91932 / Industry Canada: IC109U-1

August 29, 2011

Figure 6G-15: 2 Watts, 764.0875 & 794.0875 MHz, 25 kHz Channel Spacing

Motorola Solutions


FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 2 Watts

806.0125 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-13	*	*
2418.0375	-13	*	*
3224.0500	-13	*	*
4030.0625	-13	*	*
4836.0750	-13	*	*
5642.0875	-13	*	*
6448.1000	-13	*	*
7254.1125	-13	*	*
8060.1250	-13	*	*

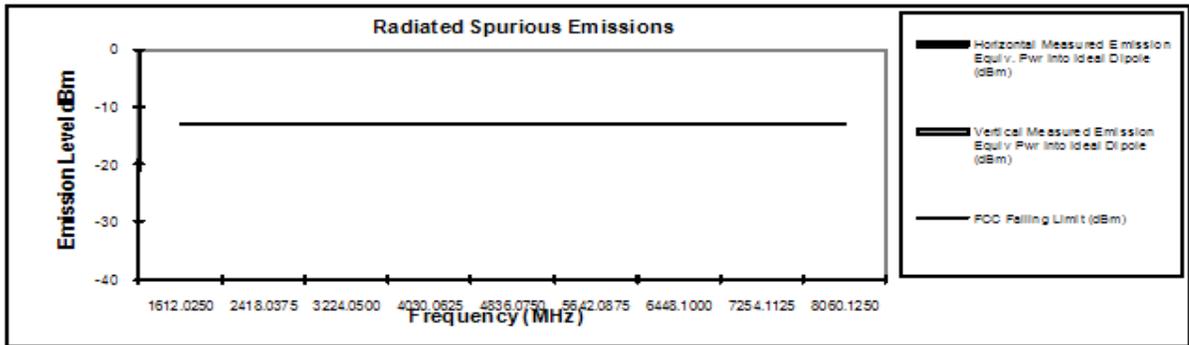


Transmit Radiated Spurious Emissions: APX7500 Analog
Tx Power: 2 Watts

868.8875 MHz

Channel Spacing 25kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-13	*	*
2606.6625	-13	*	*
3475.5500	-13	*	*
4344.4375	-13	*	*
5213.3250	-13	*	*
6082.2125	-13	*	*
6951.1000	-13	*	*
7819.9875	-13	*	*
8688.8750	-13	*	*

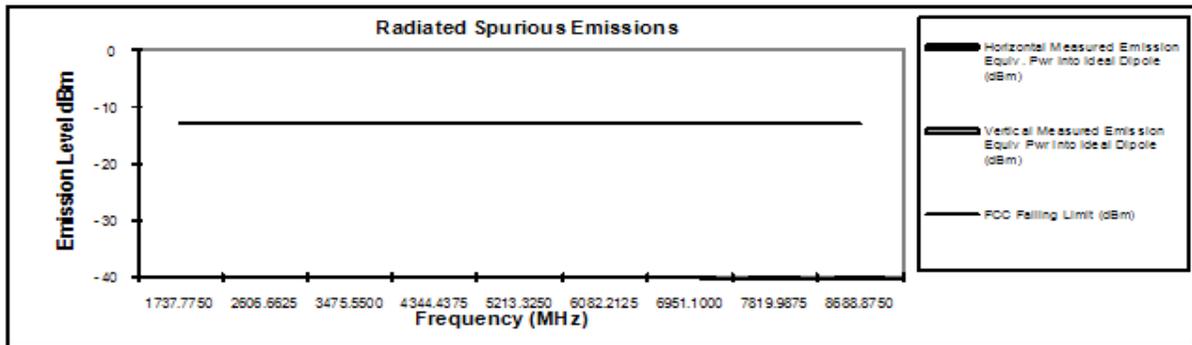

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Plantation EMC Lab – Test Performed by: Andy Gessner
FCC Registration: 91932 / Industry Canada: IC109U-1
August 29, 2011

Figure 6G-16: 2 Watts, 806.0125 & 868.8875 MHz, 25 kHz Channel Spacing

Motorola Solutions

FCC ID: NA


Transmit Radiated Spurious Emissions: APX7500 Digital

Tx Power: 36 Watts

764.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	*	*
2292.2625	-20	*	*
3056.3500	-20	*	*
3820.4375	-20	*	*
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*

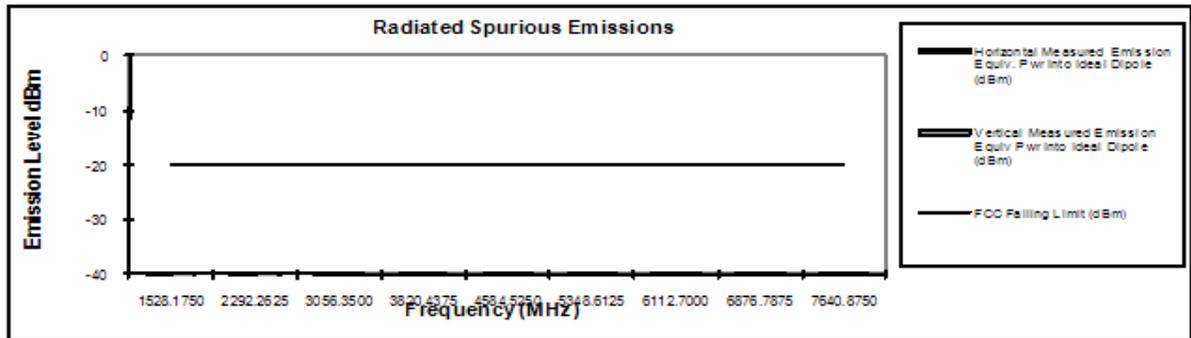


Transmit Radiated Spurious Emissions: APX7500 Digital

Tx Power: 36 Watts

794.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.1750	-20	*	*
2382.2625	-20	*	*
3176.3500	-20	*	*
3970.4375	-20	*	*
4764.5250	-20	*	*
5558.6125	-20	*	*
6352.7000	-20	*	*
7146.7875	-20	*	*
7940.8750	-20	*	*

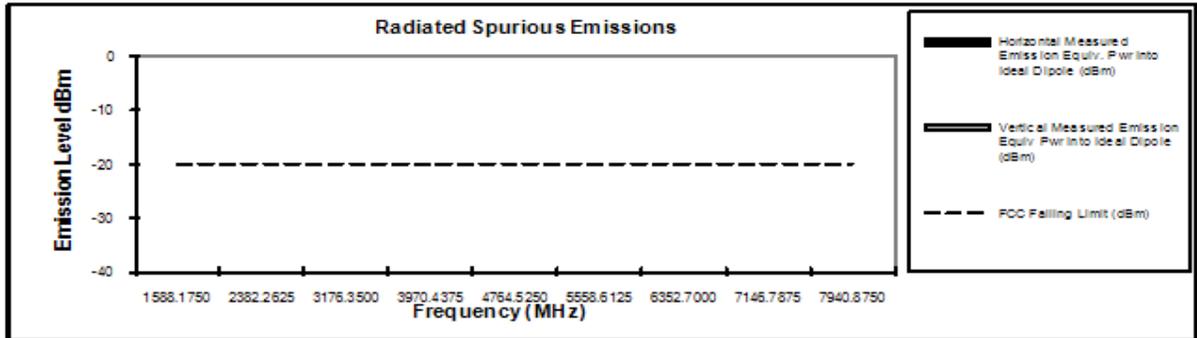

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

September 1, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-17: 36 Watts, 764.0875 & 794.0875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 42 Watts

806.0125 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-20	*	*
2418.0375	-20	*	*
3224.0500	-20	*	*
4030.0625	-20	*	*
4836.0750	-20	*	*
5642.0875	-20	*	*
6448.1000	-20	*	*
7254.1125	-20	*	*
8060.1250	-20	*	*

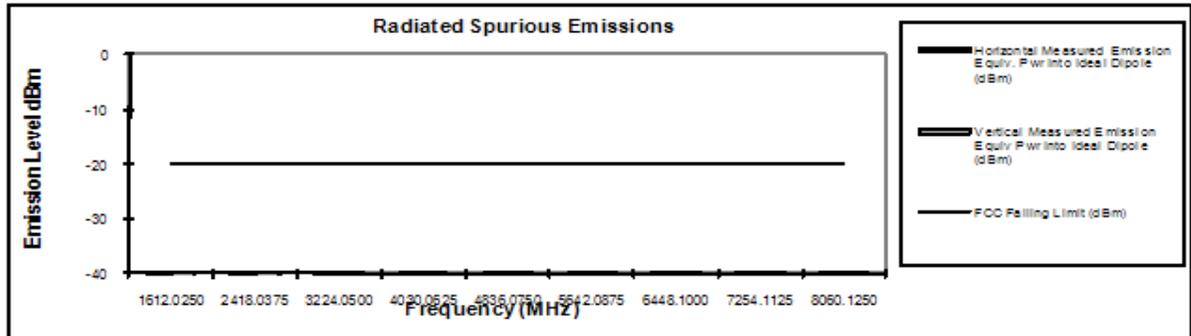

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 42 Watts

868.8875 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	*	*
2606.6625	-20	*	*
3475.5500	-20	*	*
4344.4375	-20	*	*
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	*	*
8688.8750	-20	*	*

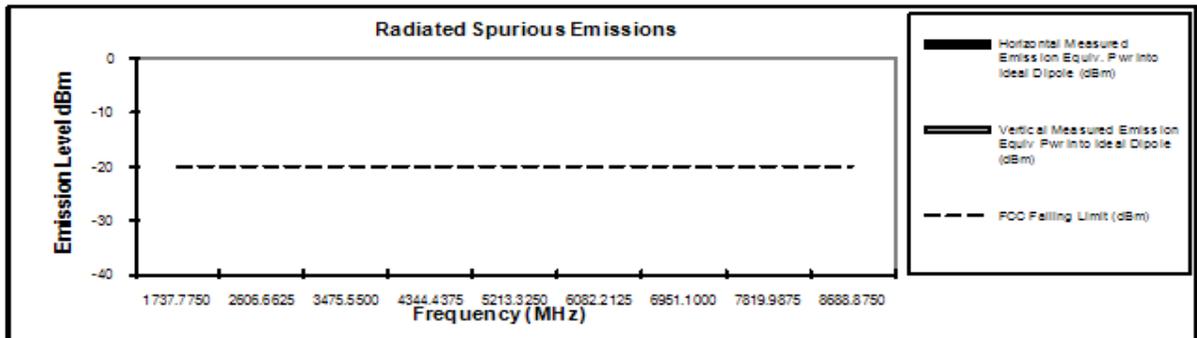

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Plantation EMC Lab – Test Performed by: Andy Gessner **September 2, 2011**
FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-18: 42 Watts, 806.0125 & 868.8875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 2 Watts

764.0875 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	*	*
2292.2625	-20	*	*
3056.3500	-20	*	*
3820.4375	-20	*	*
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*

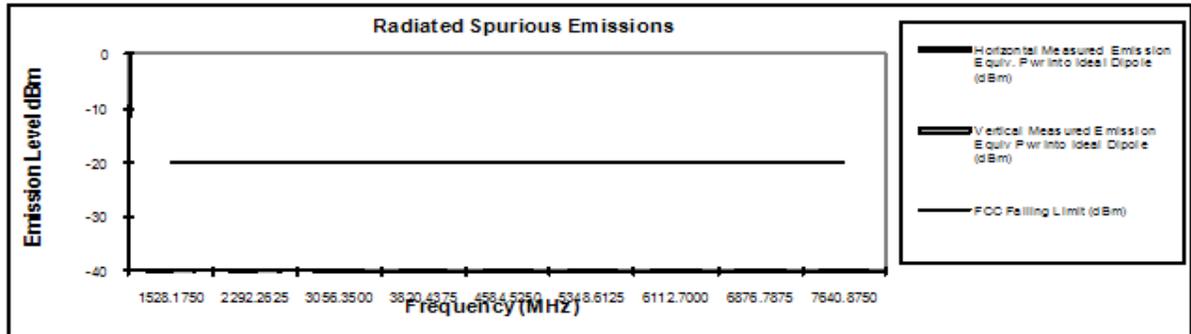

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 2 Watts

794.0875 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.1750	-20	*	*
2382.2625	-20	*	*
3176.3500	-20	*	*
3970.4375	-20	*	*
4764.5250	-20	*	*
5558.6125	-20	*	*
6352.7000	-20	*	*
7146.7875	-20	*	*
7940.8750	-20	*	*

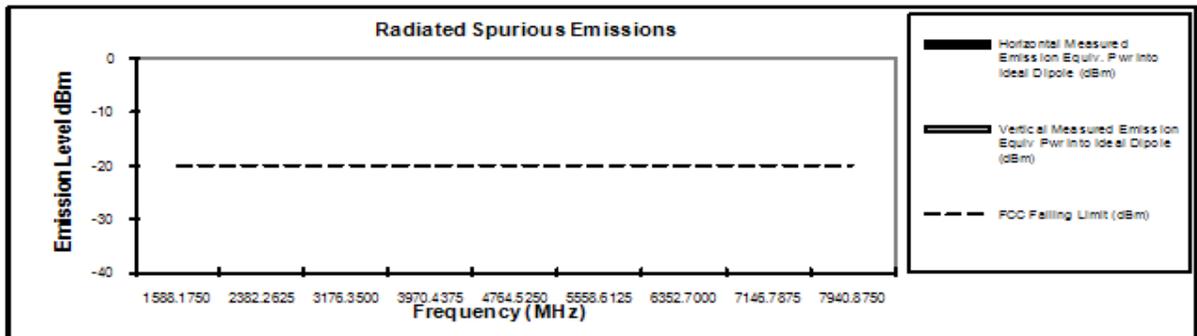

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Plantation EMC Lab – Test Performed by: Andy Gessner **September 2, 2011**
FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-19: 2 Watts, 764.0875 & 794.0875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 2 Watts

806.0125 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-20	*	*
2418.0375	-20	*	*
3224.0500	-20	*	*
4030.0625	-20	*	*
4836.0750	-20	*	*
5642.0875	-20	*	*
6448.1000	-20	*	*
7254.1125	-20	*	*
8060.1250	-20	*	*

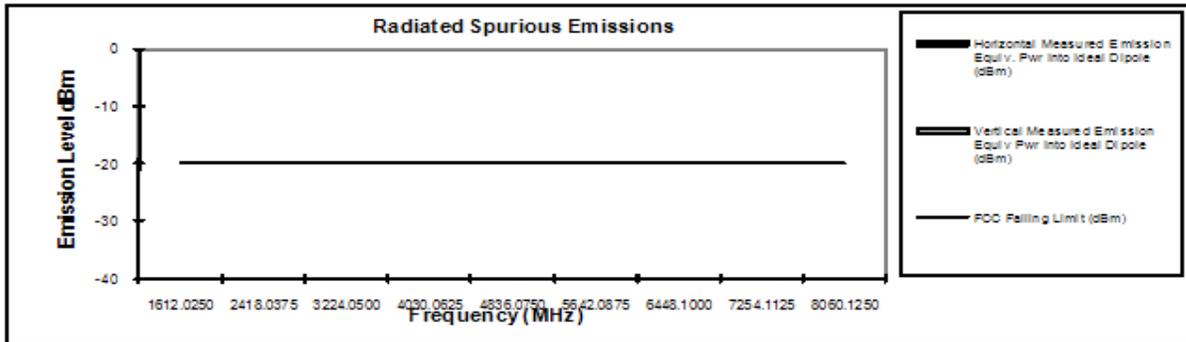

Transmit Radiated Spurious Emissions: APX7500 Digital
Tx Power: 2 Watts

868.8875 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	*	*
2606.6625	-20	*	*
3475.5500	-20	*	*
4344.4375	-20	*	*
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	*	*
8688.8750	-20	*	*

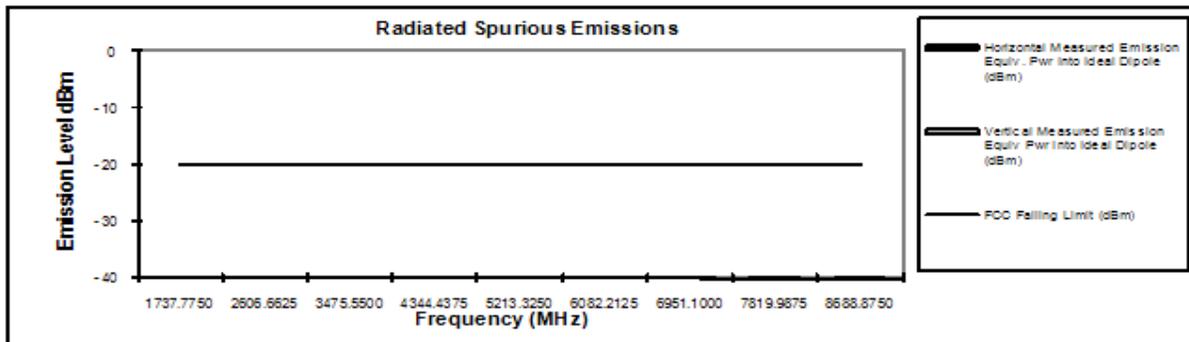

* Indicates the spurious emission could not be detected due to noise limitations or ambient.
 Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Plantation EMC Lab – Test Performed by: Andy Gessner **September 2, 2011**
FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-20: 2 Watts, 806.0125 & 868.8875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID-NA


Transmit Radiated Spurious Emissions: APX7500 TDMA

Tx Power: 36 Watts

764.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	*	*
2292.2625	-20	*	*
3056.3500	-20	*	*
3820.4375	-20	*	*
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*

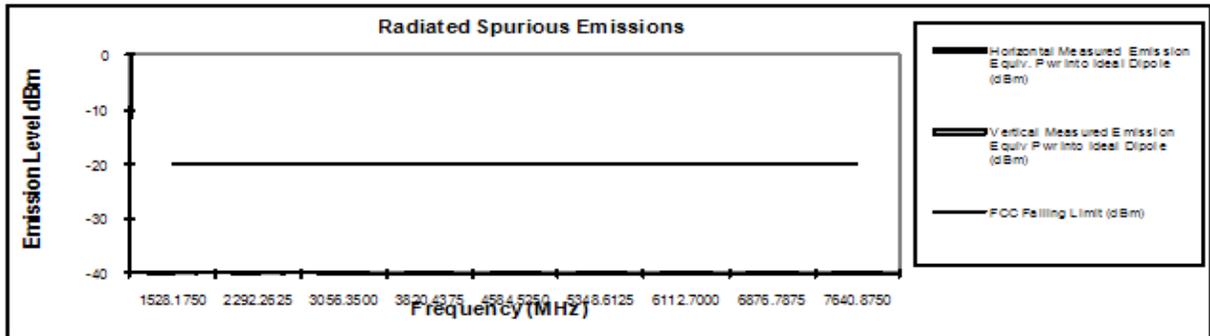


Transmit Radiated Spurious Emissions: APX7500 TDMA

Tx Power: 36 Watts

794.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.1750	-20	*	*
2382.2625	-20	*	*
3176.3500	-20	*	*
3970.4375	-20	*	*
4764.5250	-20	*	*
5558.6125	-20	*	*
6352.7000	-20	*	*
7146.7875	-20	*	*
7940.8750	-20	*	*

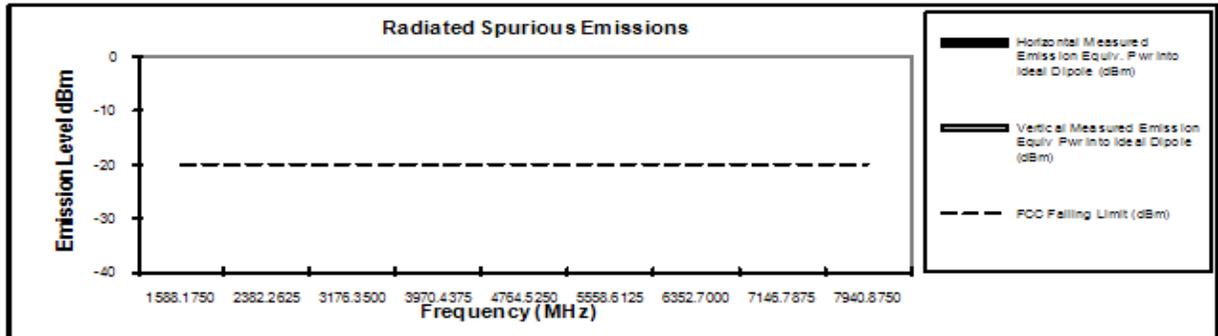

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

September 5, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-21: 36 Watts, 764.0875 & 794.0875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID: NA


Transmit Radiated Spurious Emissions: APX7500 TDMA

Tx Power: 42 Watts

806.0125 MHz

Channel Spacing 12.5kHz | SN QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-20	*	*
2418.0375	-20	*	*
3224.0500	-20	*	*
4030.0625	-20	*	*
4836.0750	-20	*	*
5642.0875	-20	*	*
6448.1000	-20	*	*
7254.1125	-20	*	*
8060.1250	-20	*	*

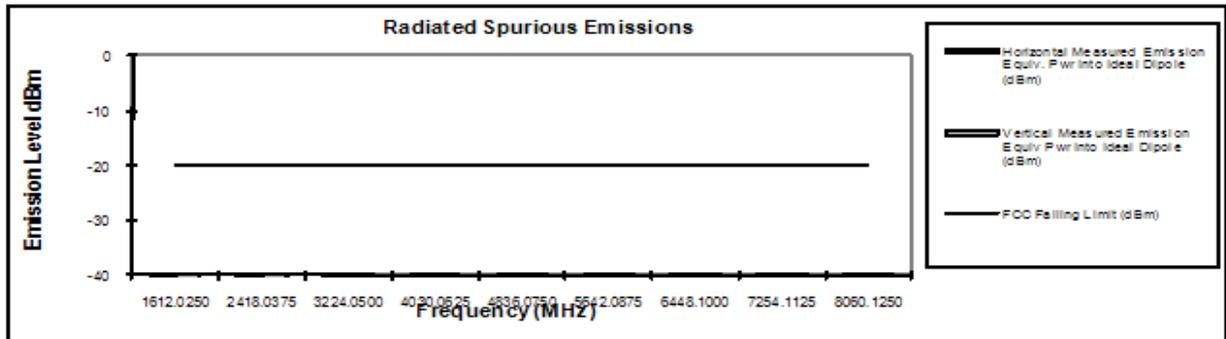


Transmit Radiated Spurious Emissions: APX7500 TDMA

Tx Power: 42 Watts

868.8875 MHz

Channel Spacing 12.5kHz | SN QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	*	*
2606.6625	-20	*	*
3475.5500	-20	*	*
4344.4375	-20	*	*
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	*	*
8688.8750	-20	*	*

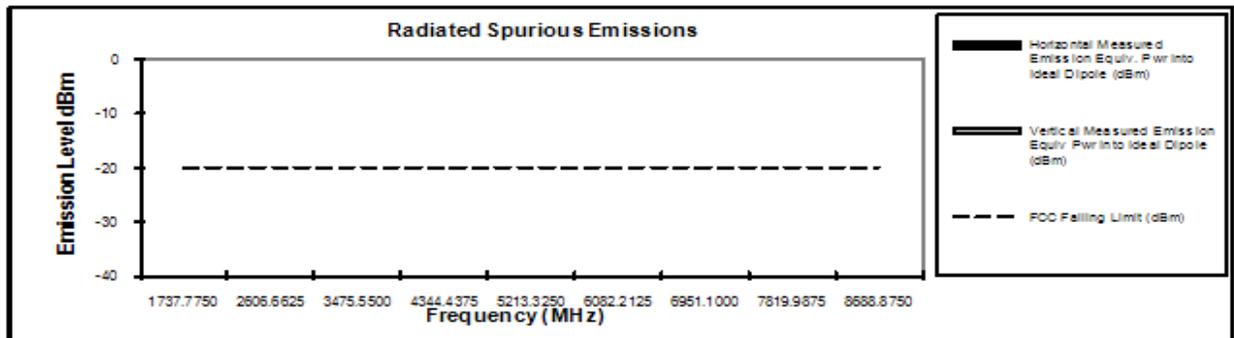

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

September 5, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-22: 42 Watts, 806.0125 & 868.8875MHz, 12.5 kHz Channel Spacing

Motorola Solutions


FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 TDMA
Tx Power: 2 Watts

764.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1528.1750	-20	*	*
2292.2625	-20	*	*
3056.3500	-20	*	*
3820.4375	-20	*	*
4584.5250	-20	*	*
5348.6125	-20	*	*
6112.7000	-20	*	*
6876.7875	-20	*	*
7640.8750	-20	*	*

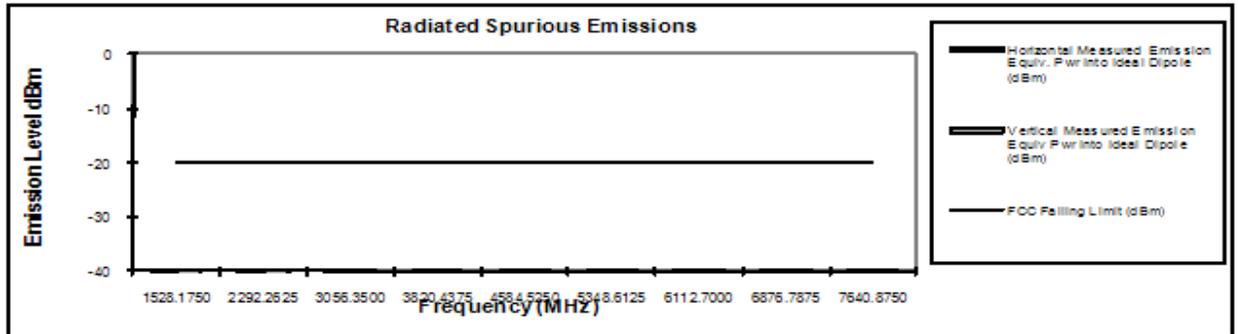


Transmit Radiated Spurious Emissions: APX7500 TDMA
Tx Power: 2 Watts

794.0875 MHz

Channel Spacing 12.5kHz | S/N QMPOZ05C

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1588.1750	-20	*	*
2382.2625	-20	*	*
3176.3500	-20	*	*
3970.4375	-20	*	*
4764.5250	-20	*	*
5558.6125	-20	*	*
6352.7000	-20	*	*
7146.7875	-20	*	*
7940.8750	-20	*	*

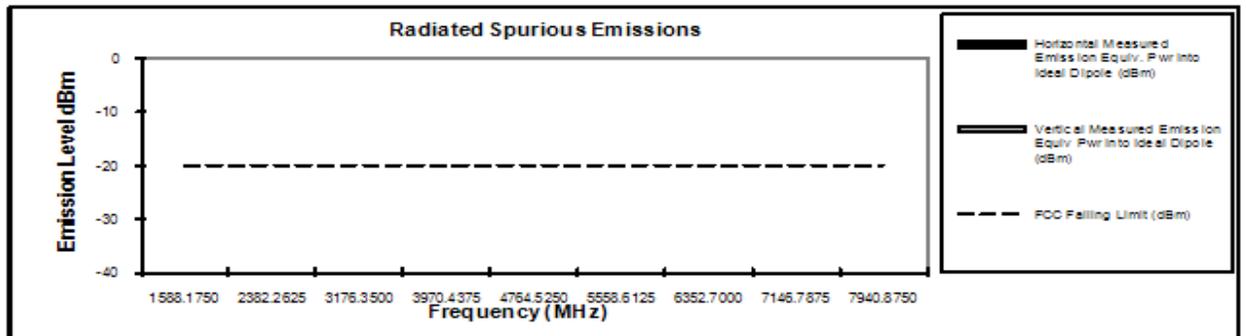

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner

September 5, 2011

FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-23: 2 Watts, 764.0875 & 794.0875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID: NA

Transmit Radiated Spurious Emissions: APX7500 TDMA
Tx Power: 2 Watts

806.0125 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**


Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-20	*	*
2418.0375	-20	*	*
3224.0500	-20	*	*
4030.0625	-20	*	*
4836.0750	-20	*	*
5642.0875	-20	*	*
6448.1000	-20	*	*
7254.1125	-20	*	*
8060.1250	-20	*	*

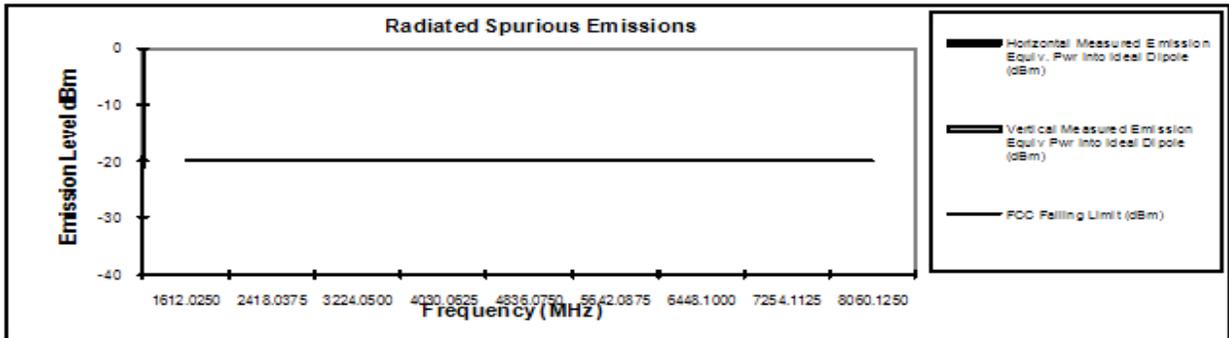

Transmit Radiated Spurious Emissions: APX7500 TDMA
Tx Power: 2 Watts

868.8875 MHz **Channel Spacing 12.5kHz | S/N QMPOZ05C**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.7750	-20	*	*
2606.6625	-20	*	*
3475.5500	-20	*	*
4344.4375	-20	*	*
5213.3250	-20	*	*
6082.2125	-20	*	*
6951.1000	-20	*	*
7819.9875	-20	*	*
8688.8750	-20	*	*

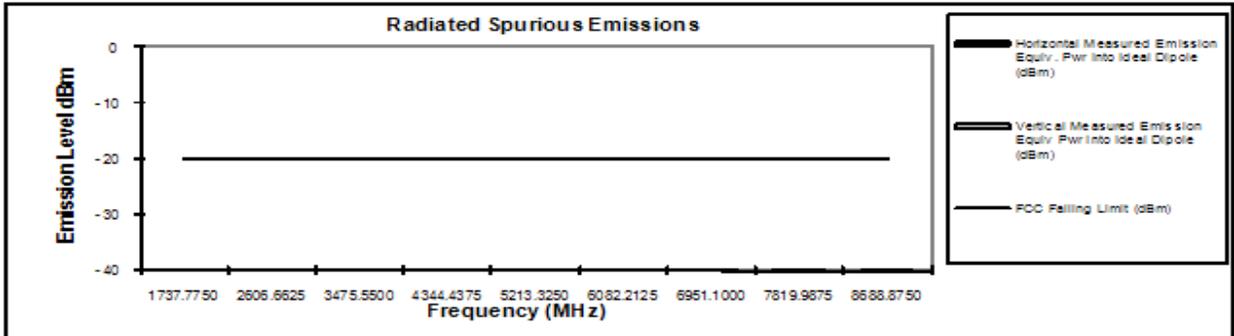

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Plantation EMC Lab – Test Performed by: Andy Gessner September 5, 2011
 FCC Registration: 91932 / Industry Canada: IC109U-1

Figure 6G-24: 2 Watts, 806.0125 & 868.8875MHz, 12.5 kHz Channel Spacing

EXHIBIT 6H

Frequency Stability - Pursuant 47 CFR 90.213, 90.539, 2.1055 and 2.1033(c)(13)

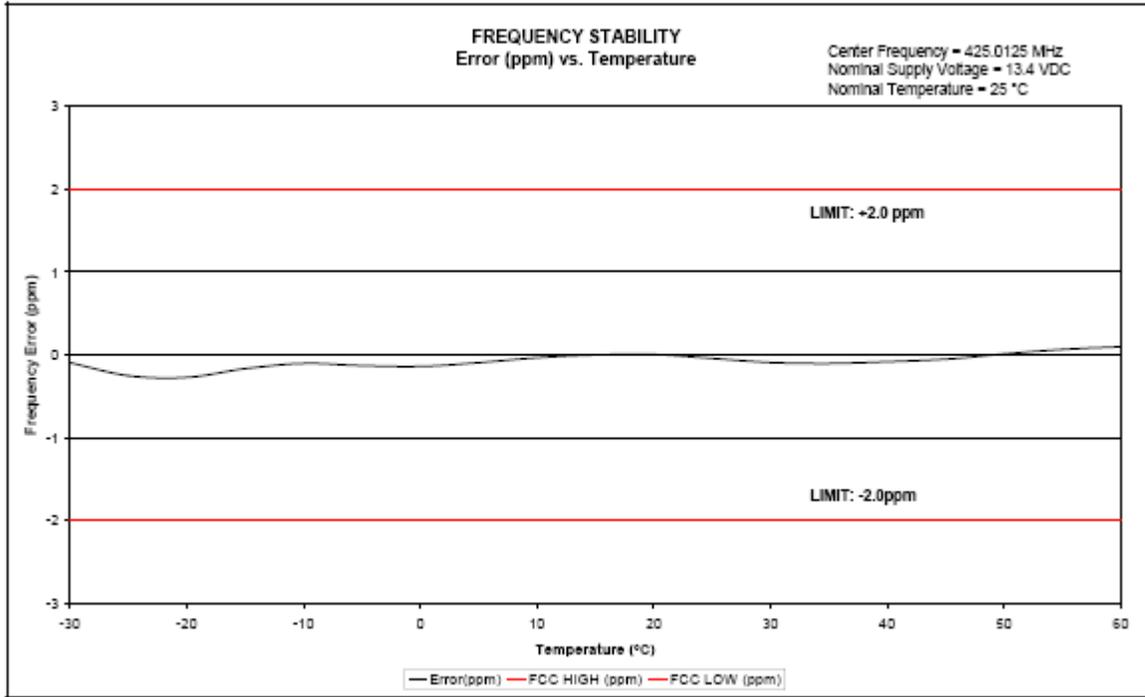


Figure 6H-1: Frequency Stability vs. Temperature, 425.0125MHz, -30°C to 60°C

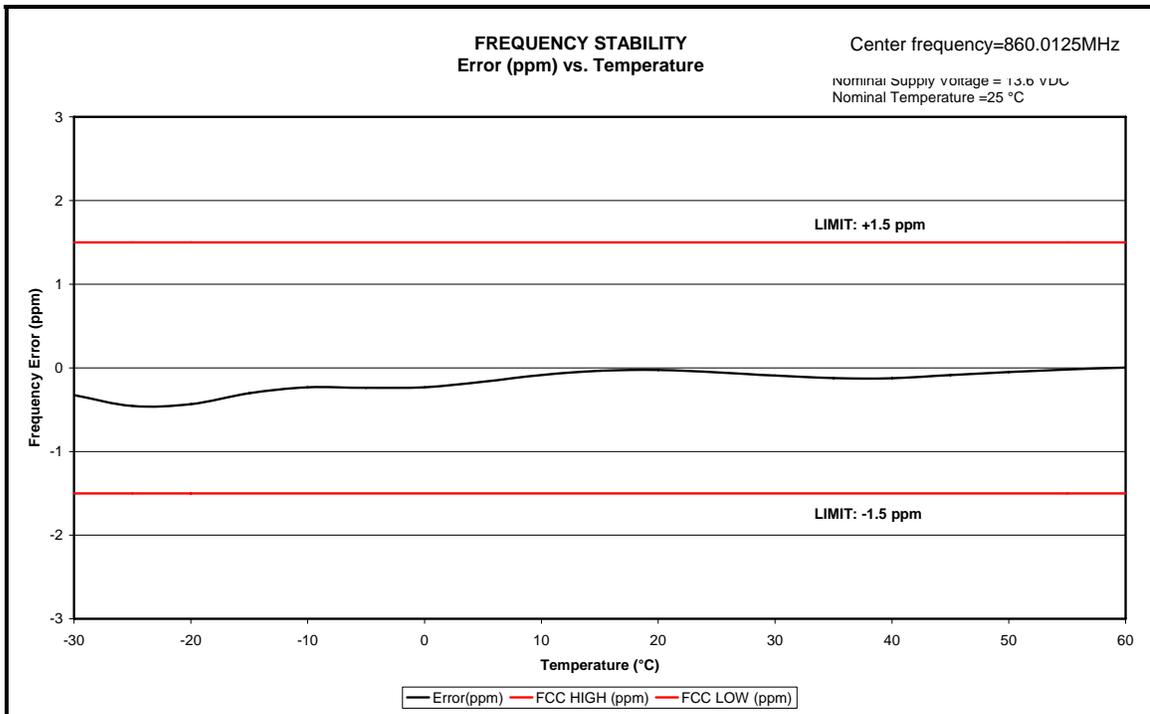


Figure 6H-2: Frequency Stability vs. Temperature, 860.0125MHz, -30°C to 60°C

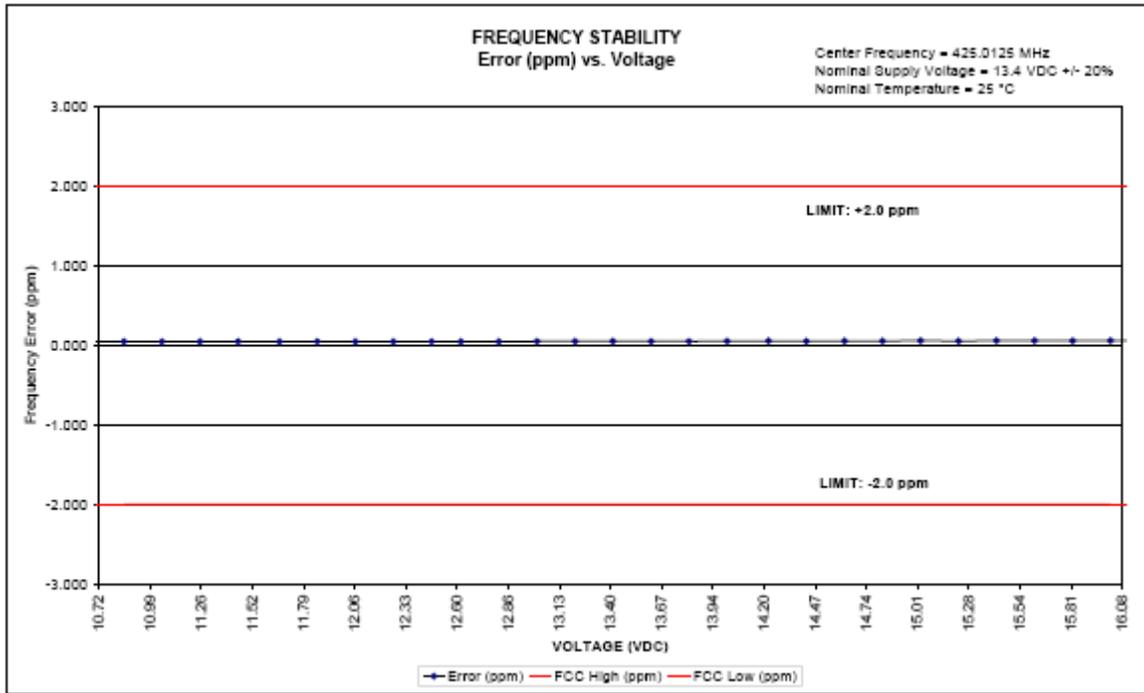


Figure 6H-3: Frequency Stability vs. Supply Voltage Change, 425.0125MHz

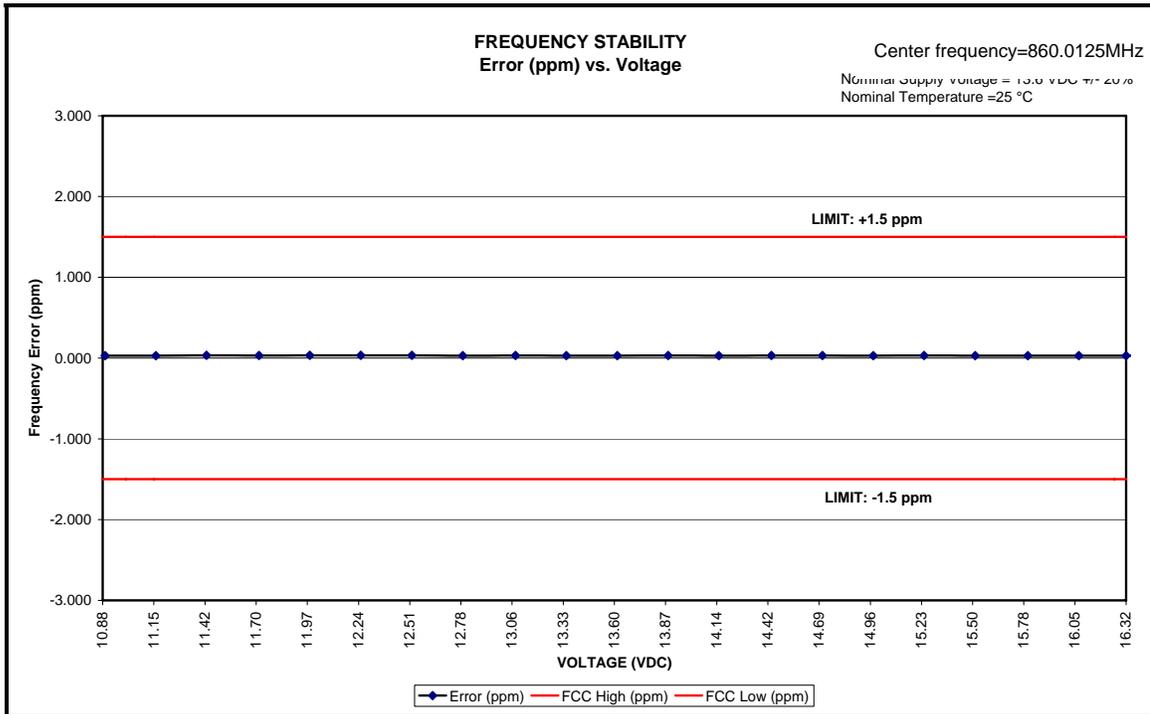


Figure 6H-4: Frequency Stability vs. Supply Voltage Change, 860.0125MHz

EXHIBIT 6
Transient Frequency Behavior - Pursuant 47 CFR 90.214

Analog Mode

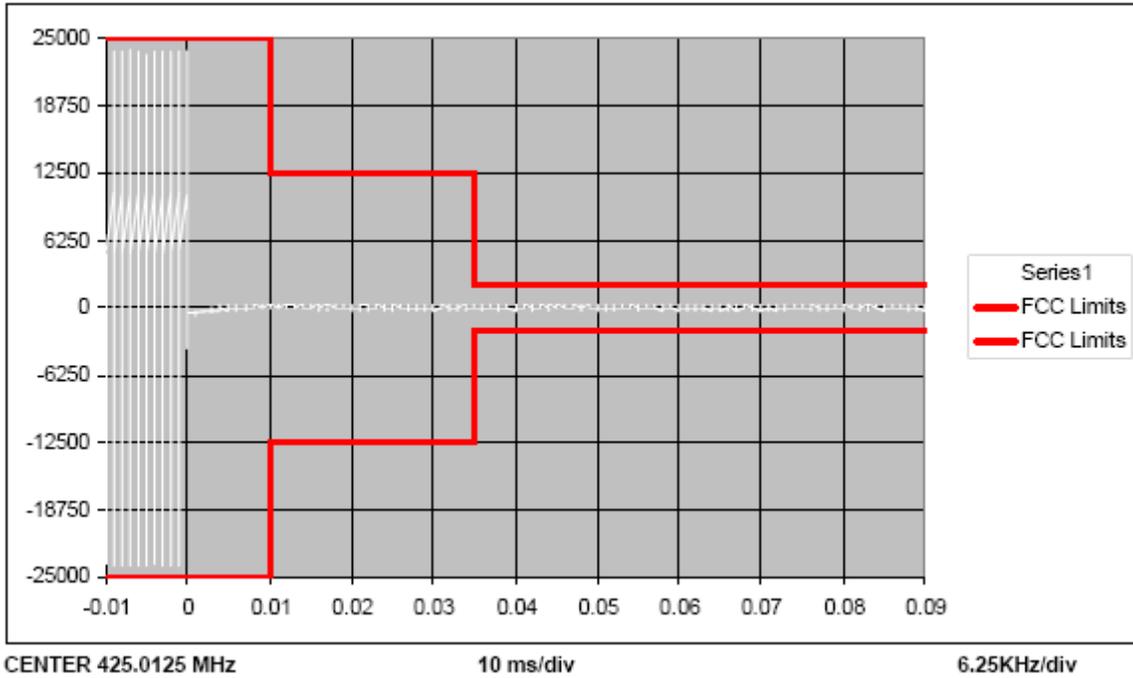


Figure 6I-1: Transient Frequency Behavior. 425.0125 MHz, 25 kHz Channel Spacing, Key-up Transient (Not for FCC Review)

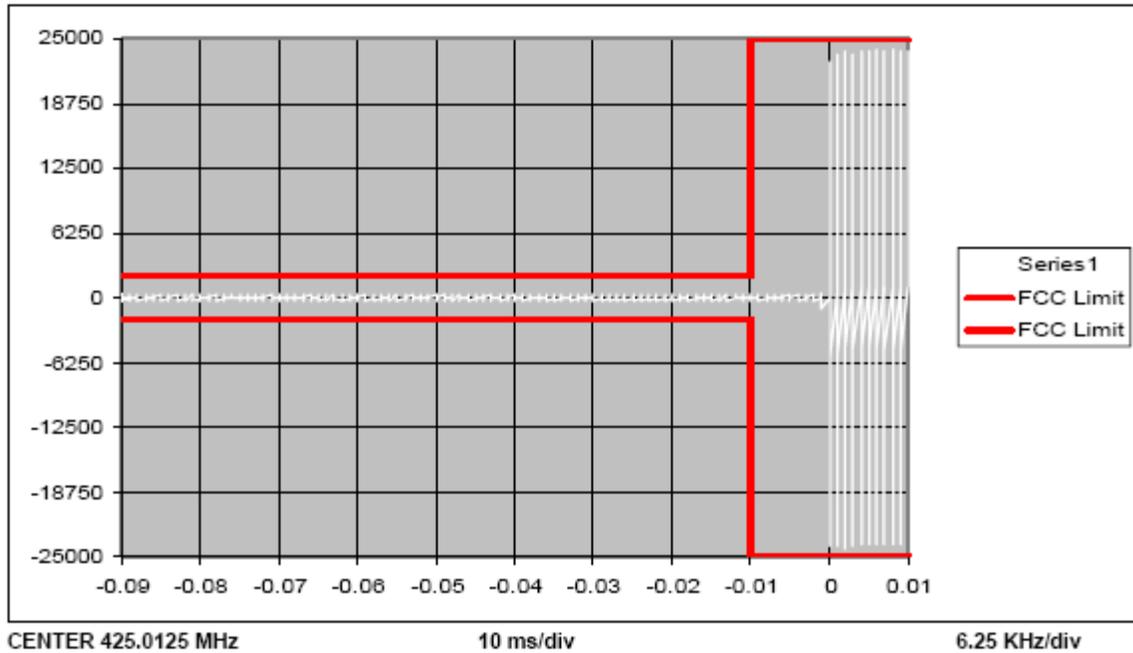


Figure 6I-2: Transient Frequency Behavior. 425.0125 MHz, 25 kHz Channel Spacing, De-Key Transient (Not for FCC Review)

DIGITAL MODE

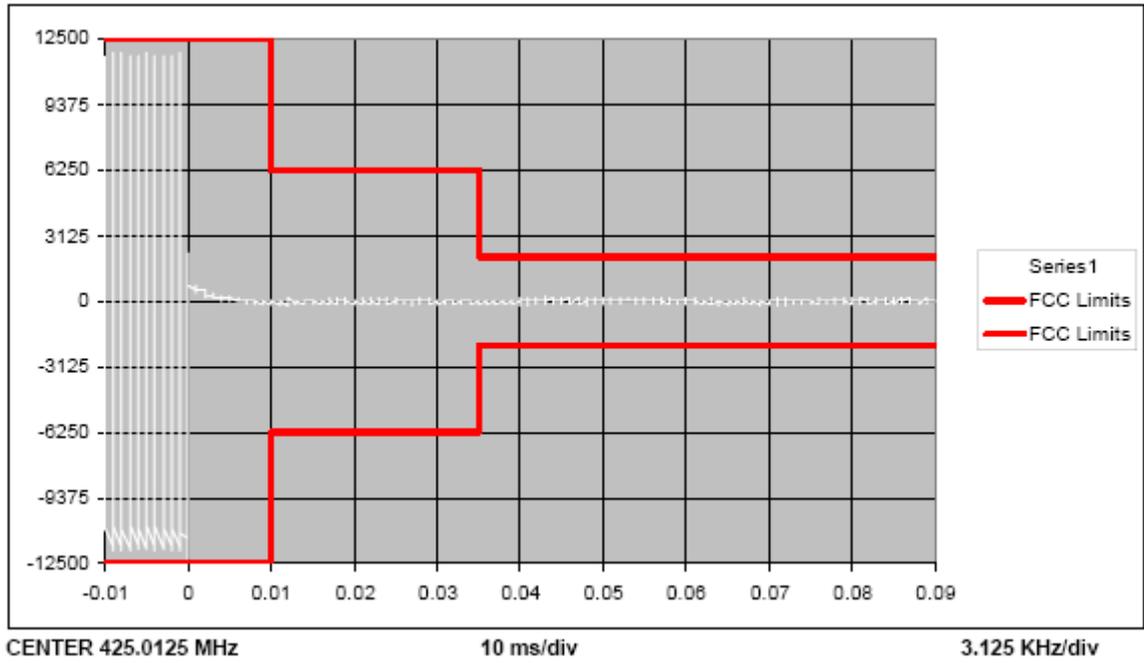


Figure 6I-3: Transient Frequency Behavior. 425.0125 MHz, 12.5 kHz Channel Spacing, Key-up Transient

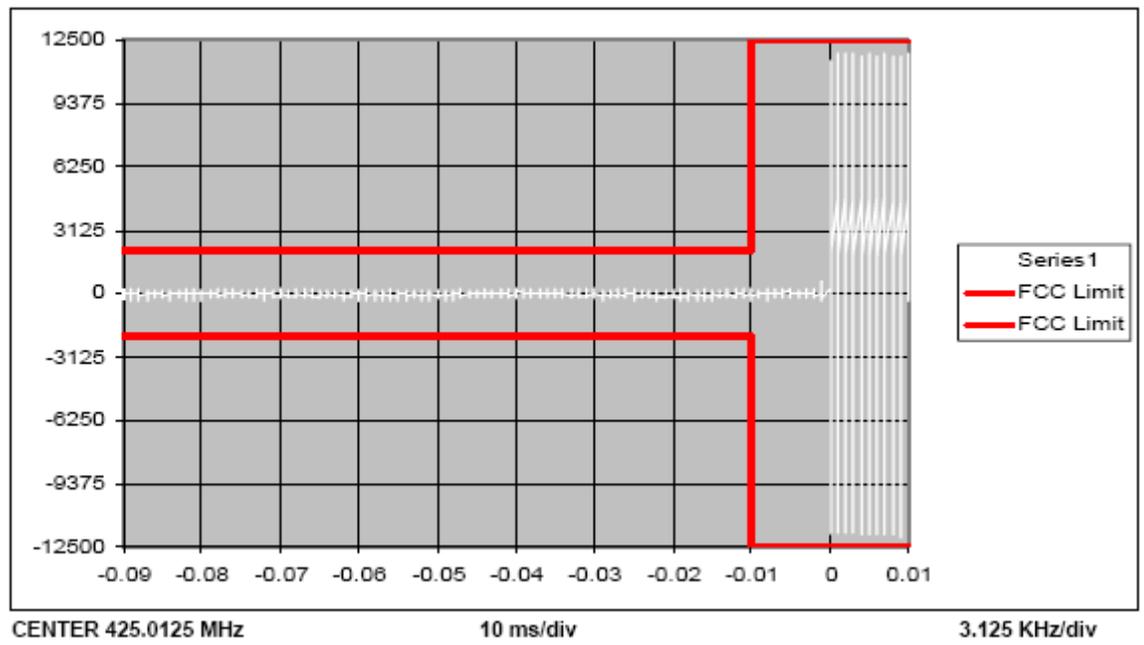


Figure 6I-4: Transient Frequency Behavior. 425.0125 MHz, 12.5 kHz Channel Spacing, De-Key Transient

EXHIBIT 6J

Adjacent Channel Coupled Power Ratios – Pursuant 47 CFR 90.543 (a) and CFR 90.543 (b)

794.0875 MHz 25.0 kHz Channel Spacing ANALOG						
Emission Designator 16K0F3E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
15.625	6.250	100		-76.19	-76.14	-40
21.875	6.250	100		-78.87	-79.05	-60
37.500	25.000	300		-72.08	-72.06	-65
62.500	25.000	300		-76.66	-76.43	-65
87.500	25.000	300		-79.76	-79.81	-65
150.000	100.000	1100		-78.08	-78.21	-65
250.000	100.000	1100		-83.71	-83.66	-65
350.000	100.000	1100		-86.75	-86.69	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing ANALOG						
Emission Designator 11K0F3E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-68.06	-67.78	-40
15.625	6.250	100		-75.53	-76.33	-60
21.875	6.250	100		-79.02	-78.79	-60
37.500	25.000	300		-71.76	-71.86	-65
62.500	25.000	300		-76.40	-76.62	-65
87.500	25.000	300		-79.70	-79.89	-65
150.000	100.000	1100		-78.45	-78.43	-65
250.000	100.000	1100		-83.84	-83.74	-65
350.000	100.000	1100		-86.68	-86.81	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing DIGITAL DATA						
Emission Designator						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-42.56	-43.02	-40
15.625	6.250	100		-76.66	-76.81	-60
21.875	6.250	100		-78.97	-78.92	-60
37.500	25.000	300		-71.57	-71.73	-65
62.500	25.000	300		-76.03	-76.44	-65
87.500	25.000	300		-79.84	-79.90	-65
150.000	100.000	1100		-78.29	-78.39	-65
250.000	100.000	1100		-83.99	-83.91	-65
350.000	100.000	1100		-86.89	-86.96	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing DIGITAL						
Emission Designator 8K10F1E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-42.25	-42.70	-40
15.625	6.250	100		-76.61	-76.41	-60
21.875	6.250	100		-78.78	-78.92	-60
37.500	25.000	300		-74.07	-73.85	-65
62.500	25.000	300		-76.52	-76.32	-65
87.500	25.000	300		-79.57	-79.83	-65
150.000	100.000	1100		-77.85	-77.69	-65
250.000	100.000	1100		-83.44	-83.29	-65
350.000	100.000	1100		-86.41	-86.37	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing DIGITAL VOICE						
Emission Designator 8K10F1E						
Ref Power Level (dBm) =						
Offset	Measurements Bandwidth	Resolutio Bandwidth		ACP (dBc)		
				Lowe	Uppe	Spec
9.375	6.250	100		-41.52	-41.02	-40
15.625	6.250	100		-76.56	-76.28	-60
21.875	6.250	100		-78.62	-78.64	-60
37.500	25.000	300		-72.15	-72.45	-65
62.500	25.000	300		-76.66	-76.93	-65
87.500	25.000	300		-79.80	-79.98	-65
150.000	100.000	1100		-78.34	-78.25	-65
250.000	100.000	1100		-83.41	-83.27	-65
350.000	100.000	1100		-86.36	-86.23	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

794.0875 MHz 12.5 kHz Channel Spacing DIGITAL TDMA						
Emission Designator 8K10F1W						
Ref Power Level (dBm) = 46.2						
Offset (kHz)	Measurements Bandwidth (kHz)	Resolution Bandwidth (Hz)		ACP (dBc)		
				Lower	Upper	Spec (dBc)
9.375	6.250	100		-42.36	-42.84	-40
15.625	6.250	100		-69.90	-70.16	-60
21.875	6.250	100		-74.54	-75.81	-60
37.500	25.000	300		-71.74	-71.13	-65
62.500	25.000	300		-76.87	-76.38	-65
87.500	25.000	300		-79.93	-79.81	-65
150.000	100.000	1100		-76.64	-76.85	-65
250.000	100.000	1100		-82.38	-81.71	-65
350.000	100.000	1100		-84.24	-84.25	-65
>400kHz-12MHz	30 (swept)	30000		<-75		-75
12M-RX Band	30 (swept)	30000		<-75		-75
in RX Band	30 (swept)	30000		<-100		-100

EXHIBIT 6K

1559-1610MHz Emissions (GNSS) - Pursuant 47 CFR 90.543 (e)

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>				
Product: <u>APX7500 - 7/800 MHz Single Band</u>		S/N <u>1MWM380024</u>		
		Notes: <u>ANT: Quarter Wave (HAF4016A)</u>		
Tx Freq.	<u>794.0875</u>			
		Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1588.1750	-58.54	-59.44	-56.84
		Notes: <u>ANT: Quarter Wave (HAF4016A)</u>		
Tx Freq.	<u>805.9125</u>			
		Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1611.8250	-59.84	-59.44	-58.14

Note 1: The reported emissions are wideband (>700Hz) spurs.

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: Elevated 3 dB (HAF4014A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1588.1750	-68.29	-67.89	-66.59
Notes: <u>ANT: Elevated 3 dB (HAF4014A)</u>				
Tx Freq.	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1611.8250	-67.34	-66.94	-65.64

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Low Profile (HAF4013A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1588.1750	-54.94	-54.54	-53.24
Notes: <u>ANT: 3 dB Low Profile (HAF4013A)</u>				
Tx Freq.	<u>805.9125</u>	Peak Radiated	Peak Radiated	Peak Radiated
		Spurious Emissions:	Spurious Emissions:	Spurious Emissions:
		Analog Mode	APCO Mode	F2 Mode
Spur	Frequency	(dBm)	(dBm)	(dBm)
2XFund	MHz			
	1611.8250	-56.59	-56.19	-54.89

Note 1: The reported emissions are wideband (>700Hz) spurs.

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Collinear (HAF4015A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-56.54	-56.14	-54.84
Tx Freq.		Notes: <u>ANT: 3 dB Collinear (HAF4015A)</u>		
	<u>805.9125</u>	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-58.34	-57.94	-56.64

GNSS Testing				
ADD +2.15 dB for EIRP				
Date: <u>7/7/2009</u>		S/N <u>1MWM380024</u>		
Product: <u>APX7500 - 7/800 MHz Single Band</u>		Notes: <u>ANT: 3 dB Low-Profile (HAF4018A)</u>		
Tx Freq.	<u>794.0875</u>	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1588.1750	-57.44	-57.04	-55.74
Tx Freq.		Notes: <u>ANT: 3 dB Low-Profile (HAF4018A)</u>		
	<u>805.9125</u>	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:	Peak Radiated Spurious Emissions:
	Frequency	Analog Mode	APCO Mode	F2 Mode
Spur	MHz	(dBm)	(dBm)	(dBm)
2XFund	1611.8250	-59.24	-58.84	-57.54

Note 1: The reported emissions are wideband (>700Hz) spurs.