

TEST REPORT

Report No.	KS2205S1866E02
FCC ID.....	2A54U-DTNOI7
Applicant.....	Shenzhen Xinkeying Technology Co., Ltd
Address.....	8/F , Block C, Han's Innovation Building, Xili Road, Nanshan District, Shenzhen, China
Manufacturer.....	Shenzhen Xinkeying Technology Co., Ltd
Address.....	8/F , Block C, Han's Innovation Building, Xili Road, Nanshan District, Shenzhen, China
Product Name.....	Smart Watch
Trade Mark.....	DT NO.I
Model/Type reference.....	DTNO.I 7
Listed Model(s)	DTNO.I 7PRO,DTNO.I 7MAX,DTNO.I 7PROMAX,DT7PRO, DT7MAX,DT7PROMAX,FSW1108
Standard.....	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample...	May. 12, 2022
Date of testing.....	May. 12, 2022~May. 30, 2022
Date of issue.....	May. 30, 2022
Test Result.....	Pass

Supervised by: (Printed name + Signature)	Sky dong
Approved by: (Printed name + Signature)	Neil Wan
Testing Laboratory Name.....	KSIGN(Guangdong) Testing Co., Ltd.

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TABLE OF CONTENTS

	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. OPERATION STATE	8
2.3. MEASUREMENT INSTRUMENTS LIST	9
2.4. TEST SOFTWARE	10
3. TEST ITEM AND RESULTS	11
3.1. ANTENNA REQUIREMENT	11
3.2. PEAK OUTPUT POWER	12
3.3. 20dB BANDWIDTH	19
3.4. CARRIER FREQUENCIES SEPARATION	32
3.5. NUMBER OF HOPPING CHANNEL	35
3.6. DWELL TIME	39
3.7. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED)	42
3.8. BAND EDGE EMISSIONS(RADIATED)	50
3.9. RADIATED SPURIOUS EMISSIONS	52
3.10. CONDUCTED EMISSION	59
3.11. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	62
4. EUT TEST PHOTOS	63
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	65

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

KDB 558074 D01 : The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz, 2400-2483.5 MHz and/or 5725-5850 MHz bands under §15.247 of the FCC rules (Title 47 of the Code of Federal Regulations).

ANSI C63.10-2020: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	May. 30, 2022	Original

1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Cyril Cai
Conducted Emission	15.207	Pass	Cyril Cai
Restricted Bands	15.205	Pass	Cyril Cai
Hopping Channel Separation	15.247(a)(1)	Pass	Cyril Cai
Dwell Time	15.247(a)(1)	Pass	Cyril Cai
Peak Output Power	15.247(b)(1)	Pass	Cyril Cai
Number of Hopping Frequency	15.247 (a)(1)	Pass	Cyril Cai
Band Edge Emissions	15.247(d)	Pass	Cyril Cai
Radiated Spurious Emission	15.247(c)&15.209	Pass	Cyril Cai
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)(1)	Pass	Cyril Cai
Pseudorandom Frequency Hopping Sequence	15.247 (a)(1)	Pass	Cyril Cai

Note: The measurement uncertainty is not included in the test result.

1.4. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence

in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. General Description of EUT

Test Sample Number:	1-1-1(Normal Sample),1-1-2(Engineering Sample)
Product Name:	Smart Watch
Trademark:	DT NO.I
Model/Type reference:	DTNO.I 7
Listed Model(s):	DTNO.I 7PRO,DTNO.I 7MAX,DTNO.I 7PROMAX,DT7PRO, DT7MAX,DT7PROMAX,FSW1108
Model Difference:	All models have the same circuit and RF module, except for the different names.
Power Supply(Adapter):	Input: 5V=0.5A
Power Supply(Battery):	DC 3.7V
Hardware Version:	V1.2
Software Version:	V1.0
Bluetooth V5.0	
Modulation:	GFSK, π/4-DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Max Peak Output Power:	GFSK: -4.33 dBm π/4-DQPSK: -3.79 dBm 8DPSK: -3.34 dBm
Channel number:	79
Channel separation:	1MHz
Antenna type:	Cable Antenna
Antenna gain:	-0.7dBi

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

2.2. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in gray were the channel selected for testing.

Test mode

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode $\pi/4$ -DQPSK
12	Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The test software is the Blue Test 3 which can set the EUT into the individual test modes.

2.3. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
2	Vector Signal Generator	Agilent	N5182A	MY50142520	03/04/2023
3	Analog Signal Generator	HP	83752A	3344A00337	03/04/2023
4	Power Sensor	Agilent	E9304A	MY50390009	03/04/2023
5	Power Sensor	Agilent	E9300A	MY41498315	03/04/2023
6	Wideband Radio Communication Tester	R&S	CMW500	157282	03/04/2023
7	Climate Chamber	Angul	AGNH80L	1903042120	03/04/2023
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	03/04/2023
9	RF Control Unit	Tonscend	JS0806-2	/	03/04/2023

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	03/04/2023
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/04/2023
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/04/2023
4	Spectrum Analyzer	HP	8593E	3831U02087	03/04/2023
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	12/04/2023
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	03/04/2023
7	Spectrum Analyzer	R&S	FSV40-N	101798	03/04/2023
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	03/04/2023
10	Pre-Amplifier	EMCI	EMC051835SE	980662	03/04/2023
11	Pre-Amplifier	Schwarzbeck	BBV-9721	57	03/04/2023
12	Horn Antenna	Schwarzbeck	BBHA 9170	00939	03/04/2023

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV432	1326.6105.02	03/04/2023
2	EMI Test Receiver	R&S	ESR	102524	03/04/2023
3	Manual RF Switch	JS TOYO	/	MSW-01/002	03/04/2023

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Note:

- 1)The Cal. Interval was one year.
- 2)The cable loss has calculated in test result which connection between each test instruments.

2.4. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result


The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

3.2. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration

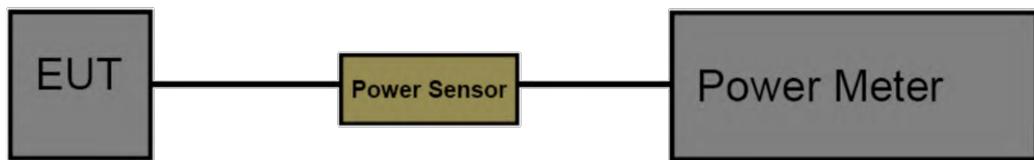


Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=10 MHz for bandwidth more than 1MHz.

Test Mode

Please refer to the clause 2.2

Test Result

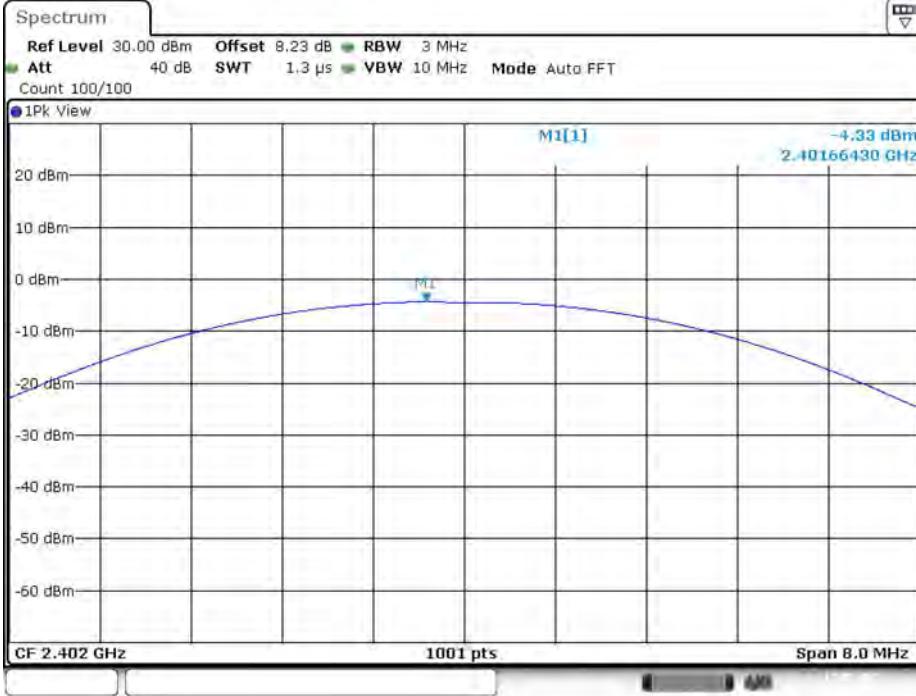Test Mode:	DH5		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	-4.33	30	
2441	-4.85		
2480	-5.93		
2402 MHz			
			
<p>Date: 13.MAY.2022 15:43:43</p>			

TRF No. FCC Part 15.247_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

2441 MHz




2480 MHz

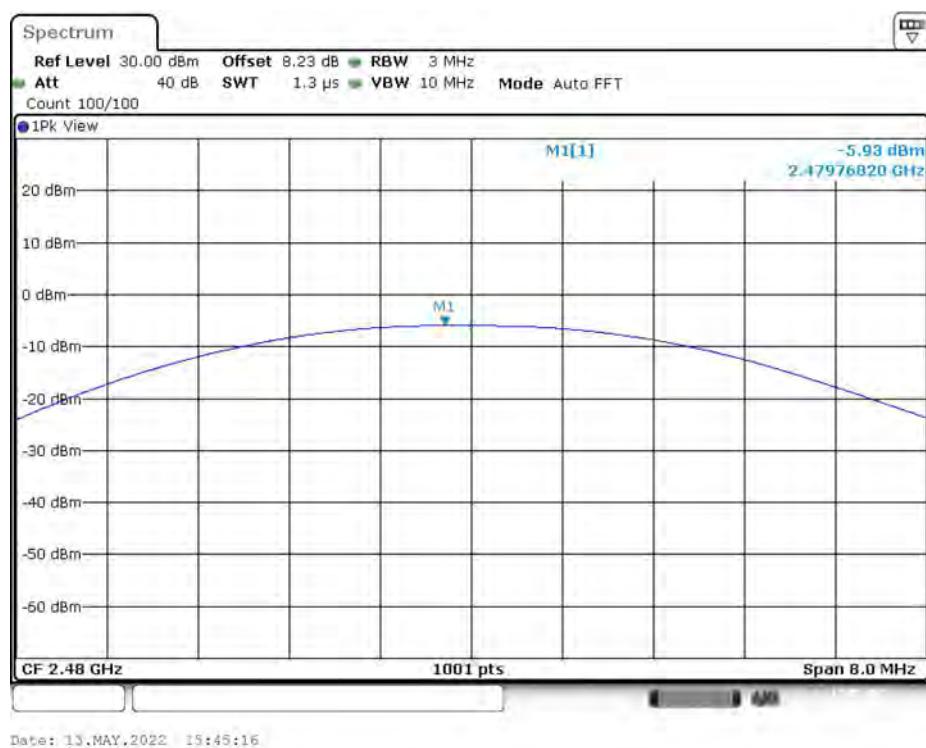

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

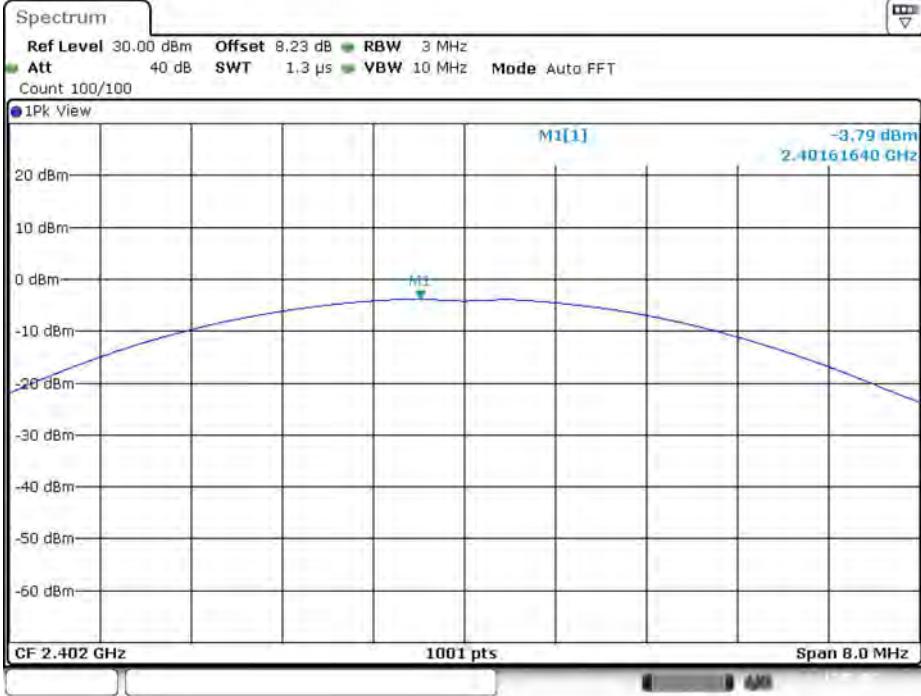Test Mode:	2DH5		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	-3.79	30	
2441	-4.43		
2480	-5.29		
2402 MHz			
			
<p>Date: 13.MAY.2022 15:45:57</p>			

TRF No. FCC Part 15.247_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

2441 MHz




2480 MHz

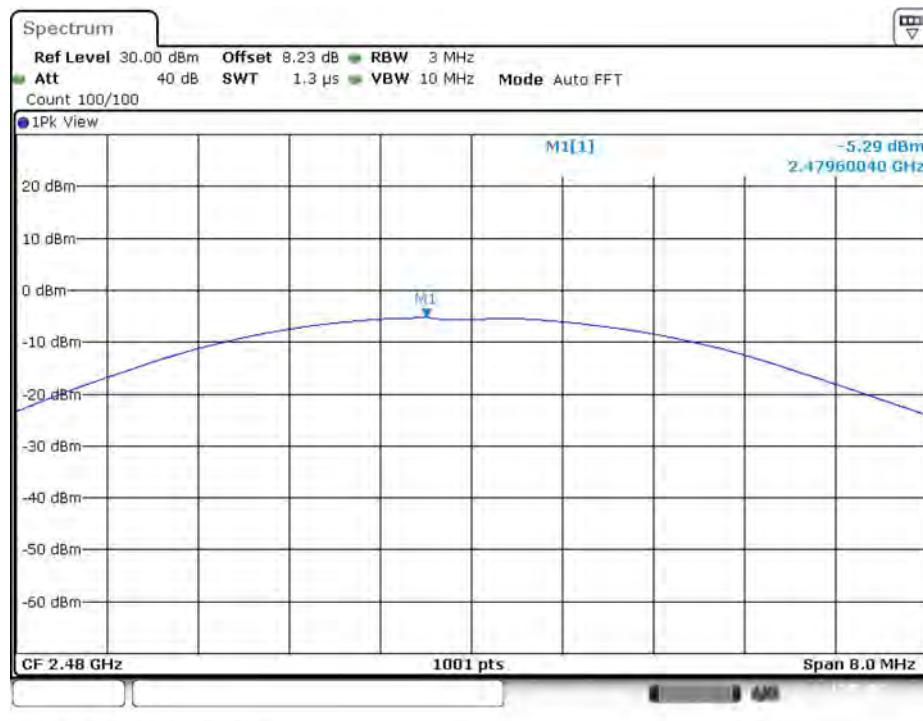

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

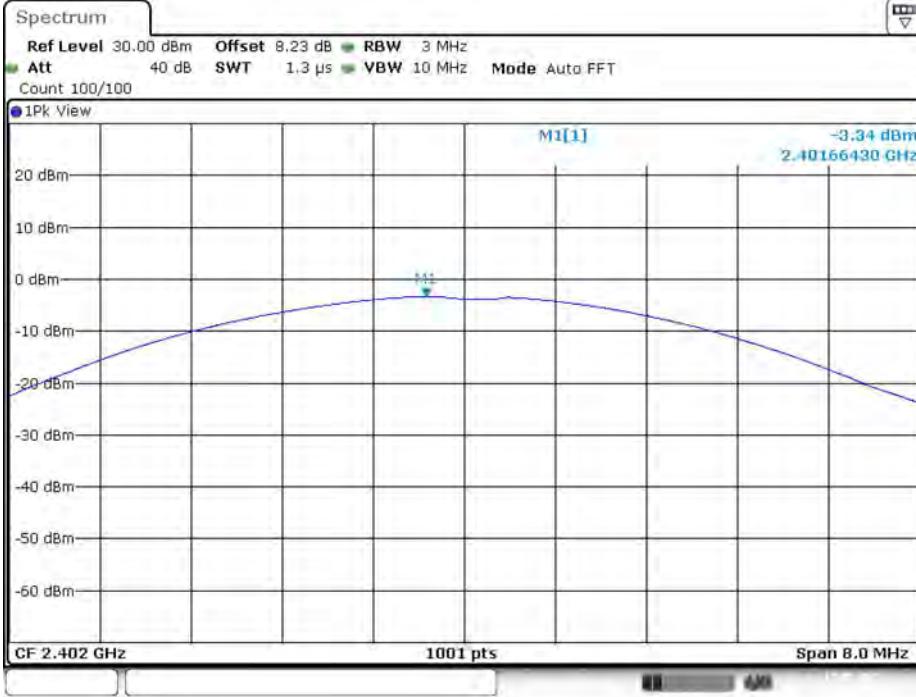Test Mode:	3DH5		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	-3.34	30	
2441	-4.04		
2480	-5.12		
2402 MHz			
			
<p>Date: 13.MAY.2022 15:48:06</p>			

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

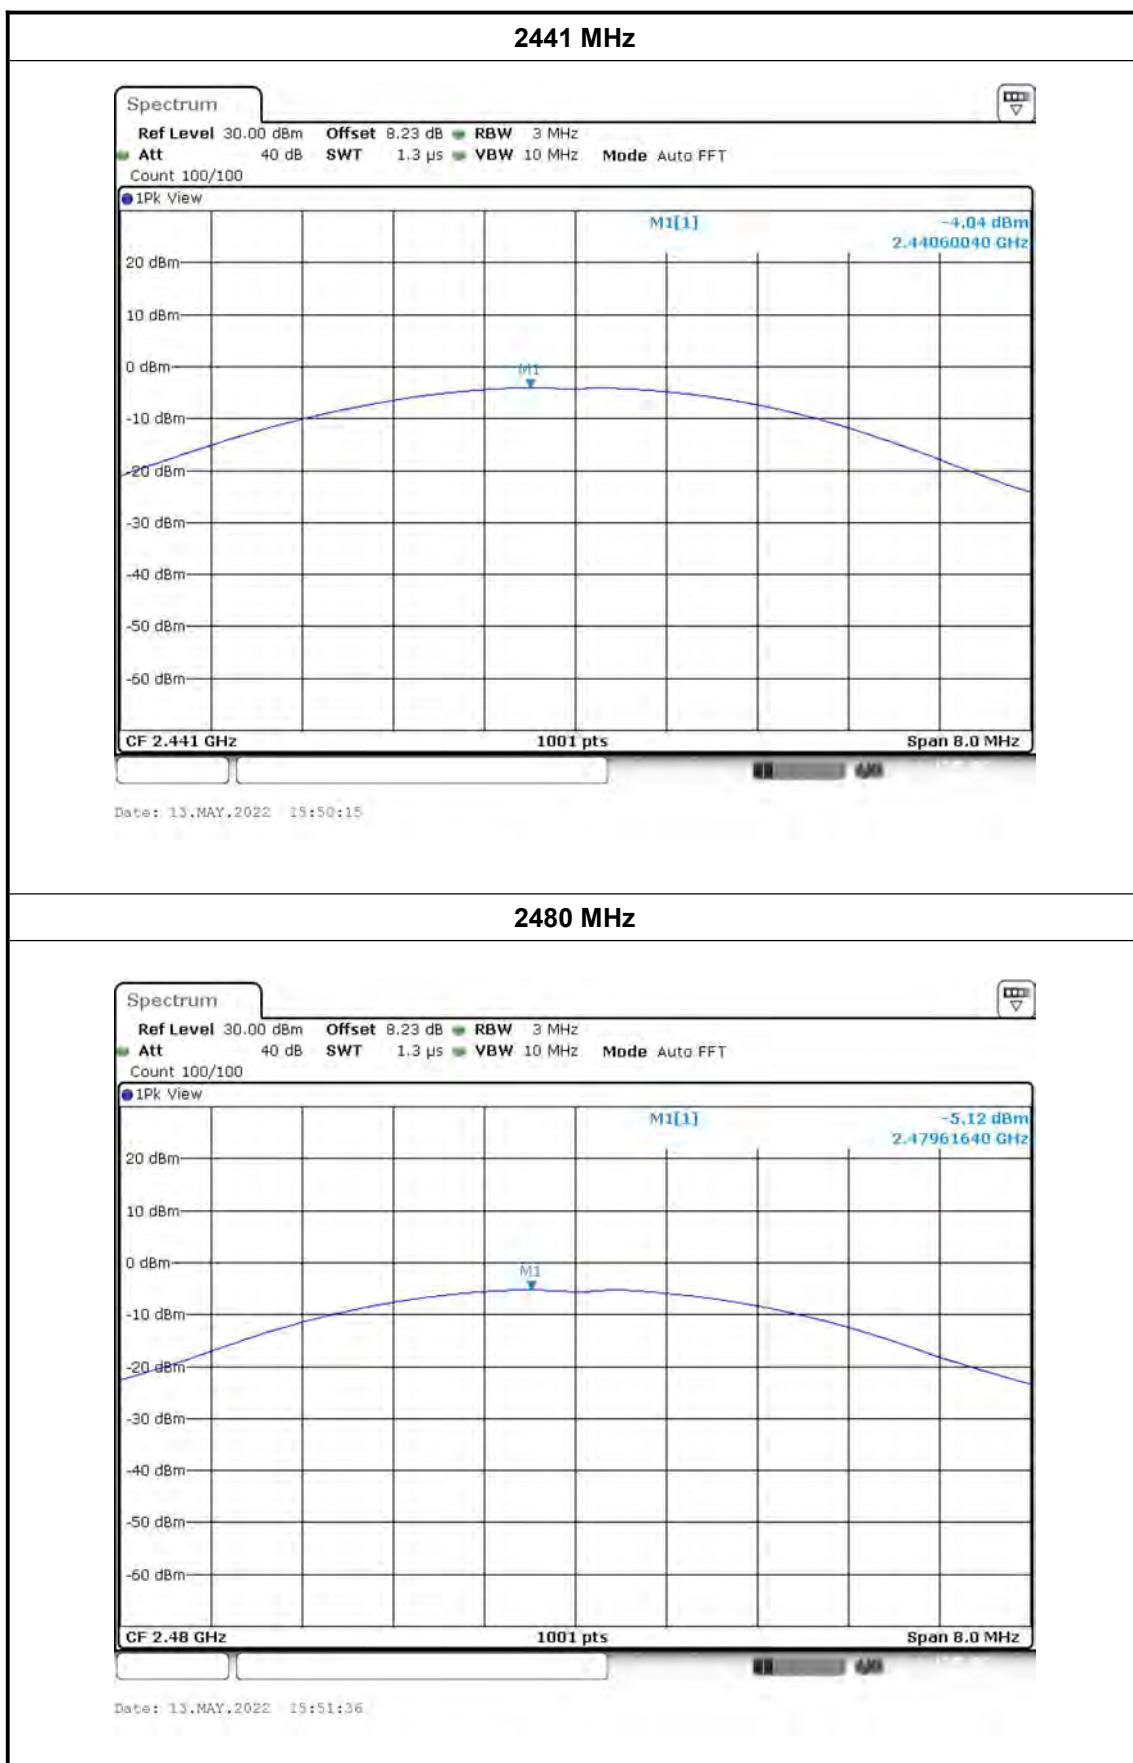

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

3.3. 20dB Bandwidth

Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	N/A	2400~2483.5

Test Configuration

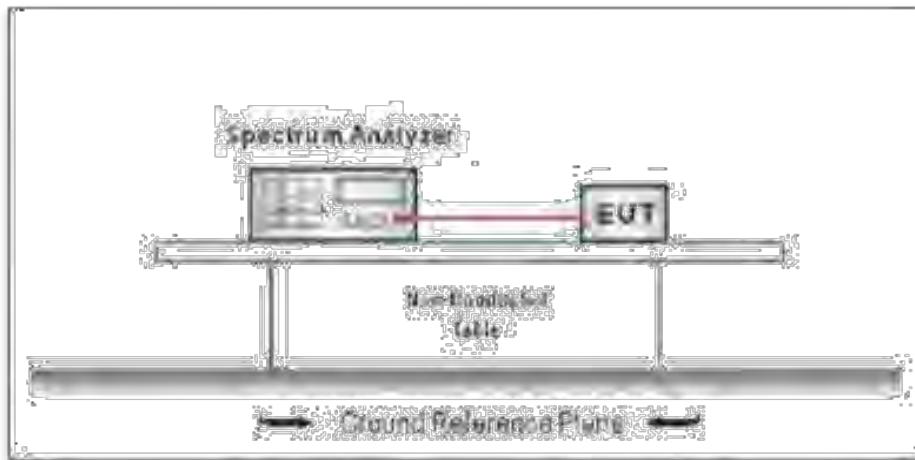

Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Set RBW = 30 kHz.
 - (2) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.2.


Test Results

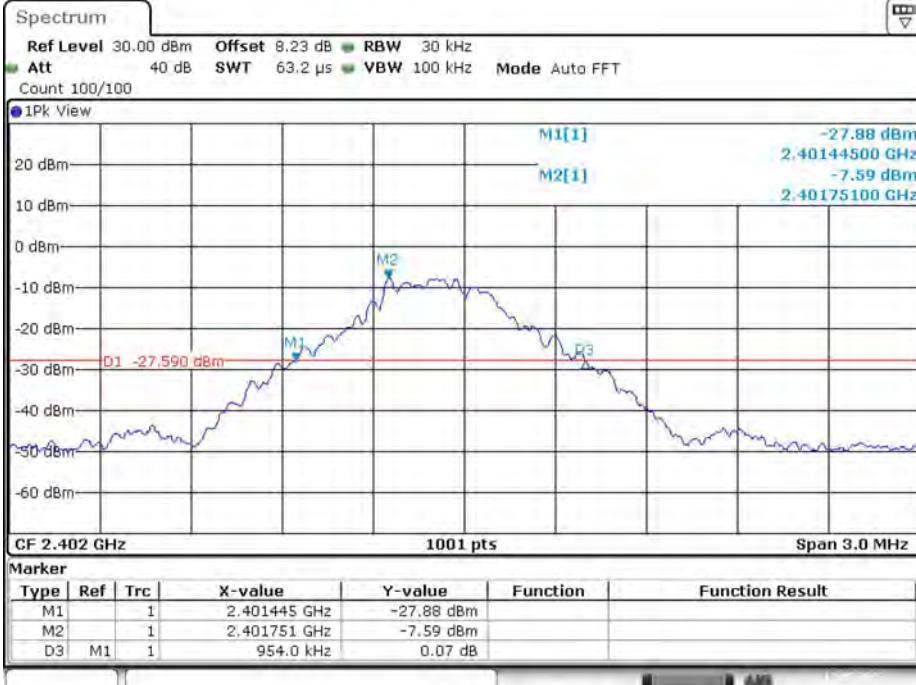Test Mode:		DH5																														
Channel frequency (MHz)	20dB Bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict																												
2402	0.95	2401.45	2402.40	PASS																												
2441	0.96	2440.44	2441.40	PASS																												
2480	0.95	2479.44	2480.40	PASS																												
2402 MHz																																
 <p>Spectrum</p> <p>Ref Level 30.00 dBm Offset 8.23 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.401445 GHz</td> <td>-27.88 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.401751 GHz</td> <td>-7.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>954.0 kHz</td> <td>0.07 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 13.MAY.2022 14:26:37</p>					Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.401445 GHz	-27.88 dBm			M2	1		2.401751 GHz	-7.59 dBm			D1	M1	1	954.0 kHz	0.07 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1	1		2.401445 GHz	-27.88 dBm																												
M2	1		2.401751 GHz	-7.59 dBm																												
D1	M1	1	954.0 kHz	0.07 dB																												

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

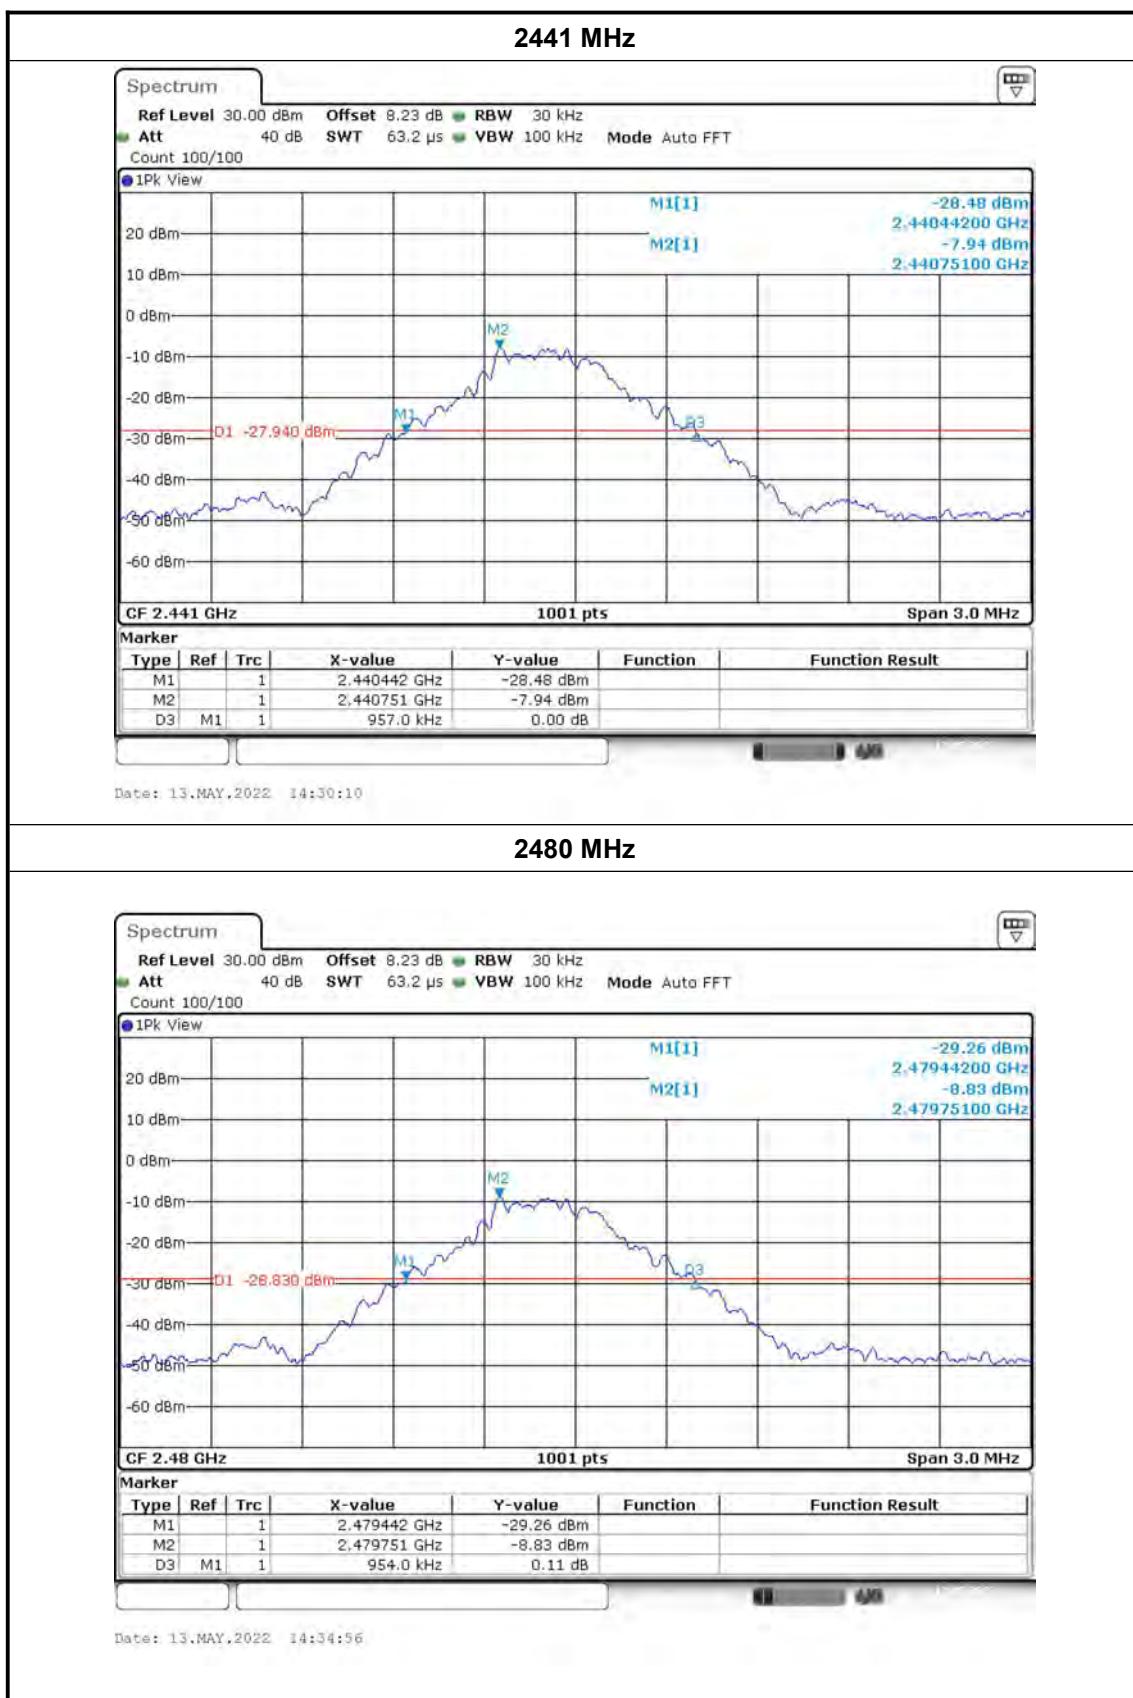

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

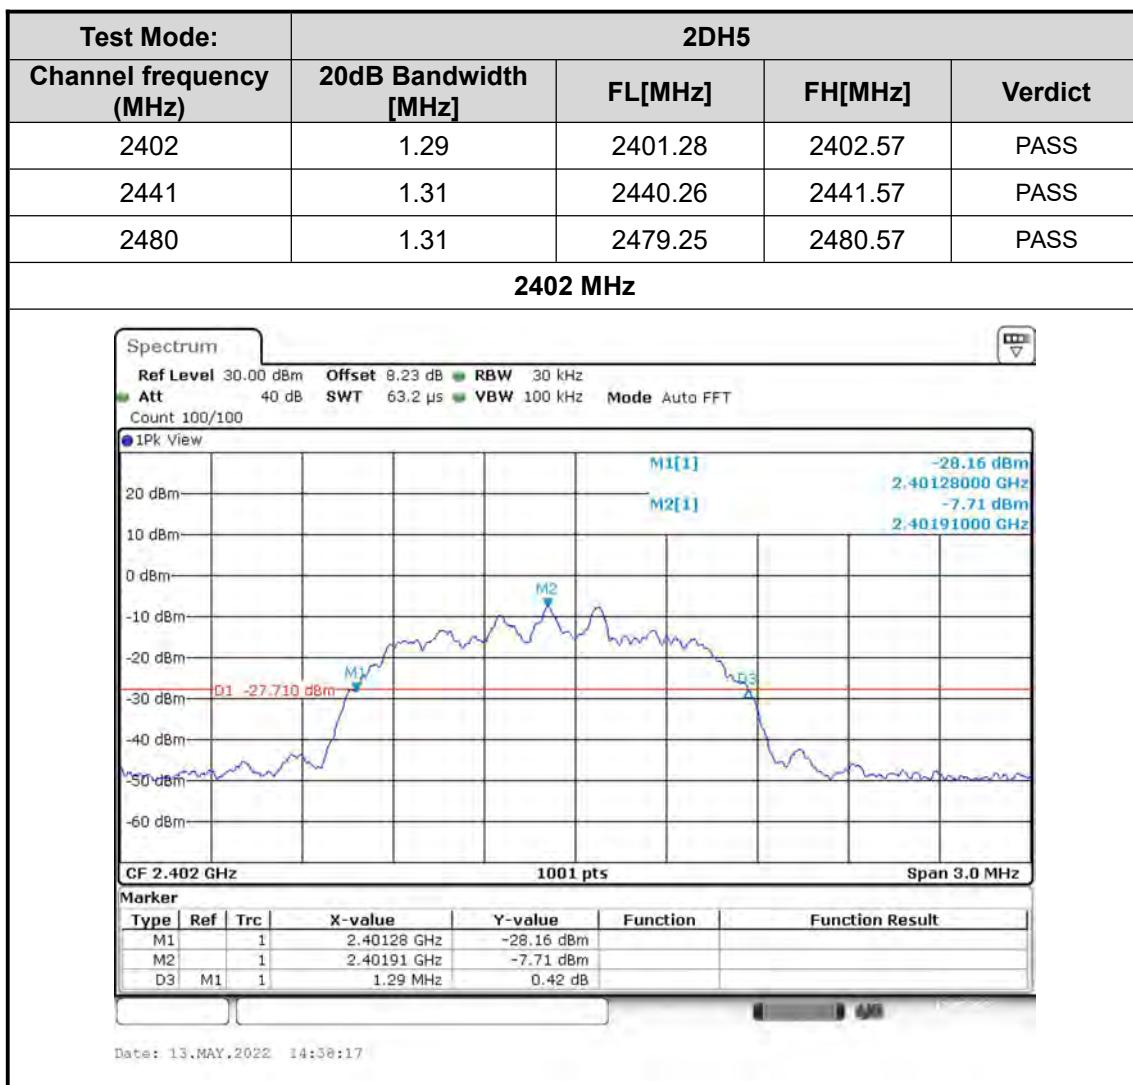

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

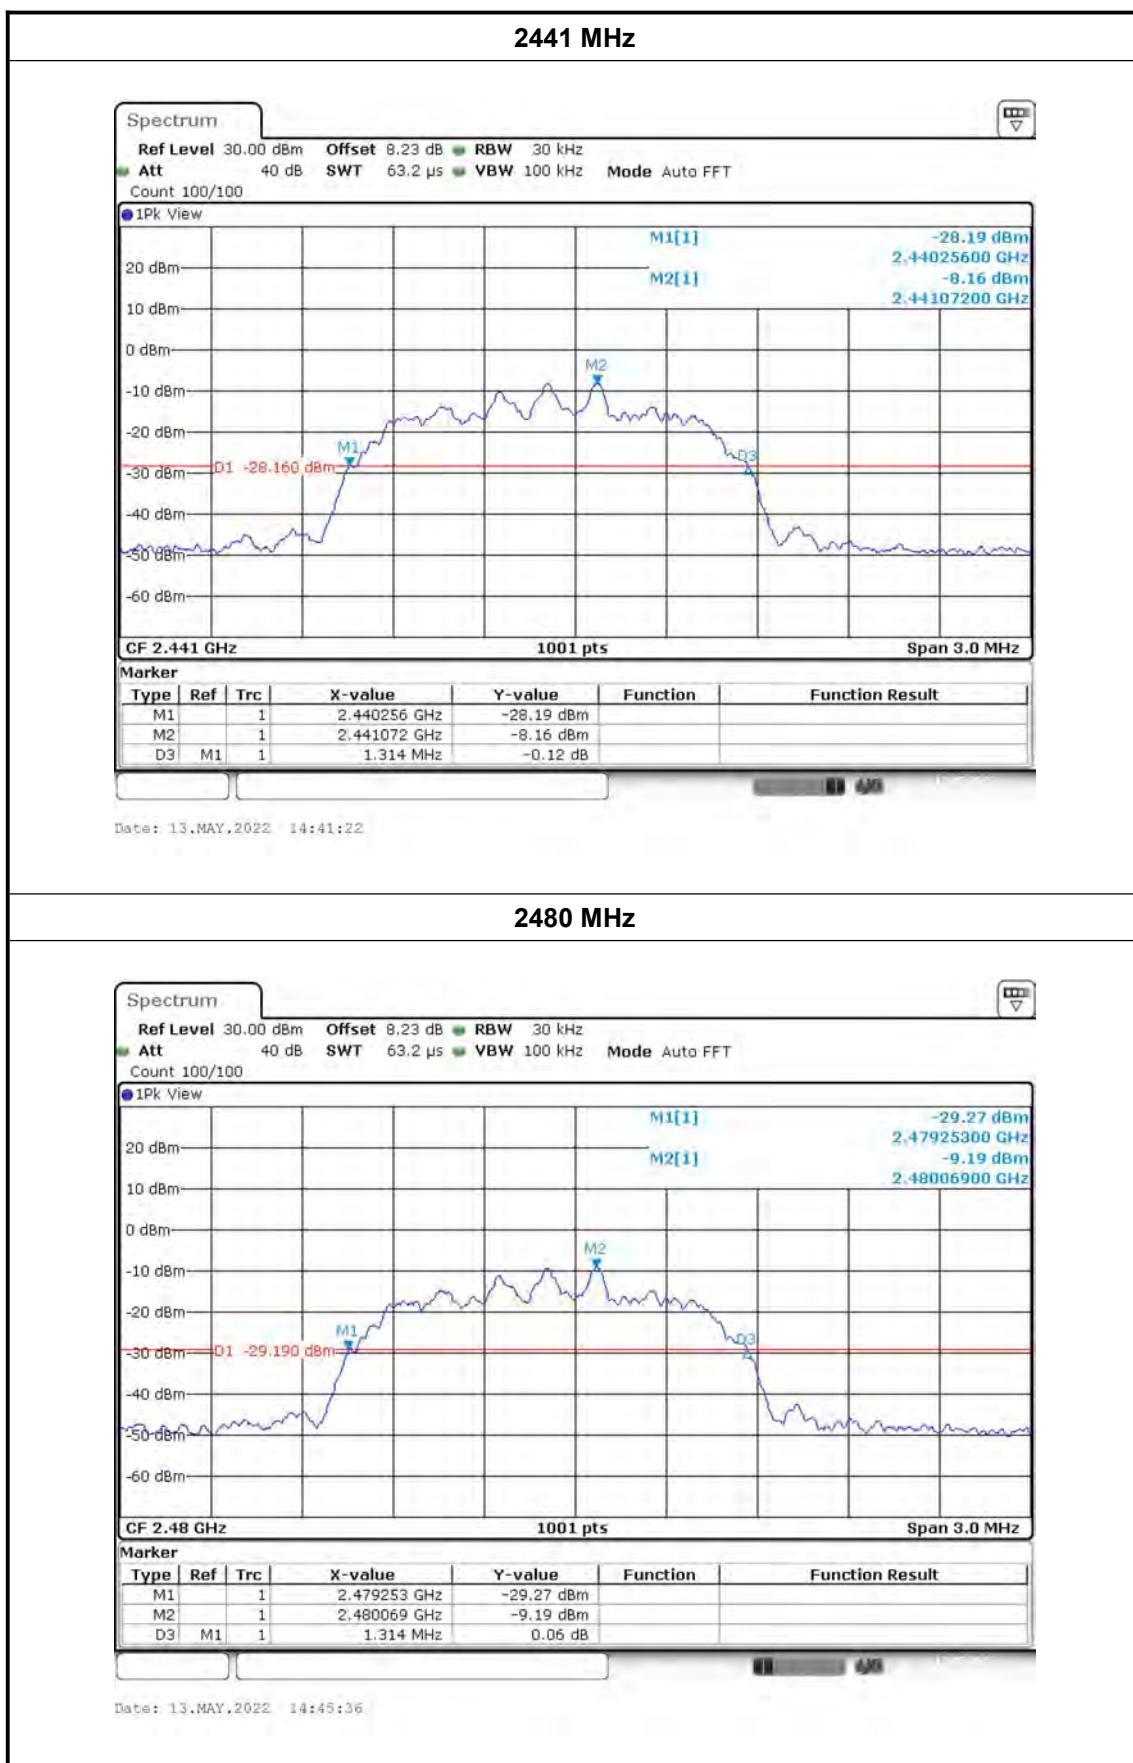

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

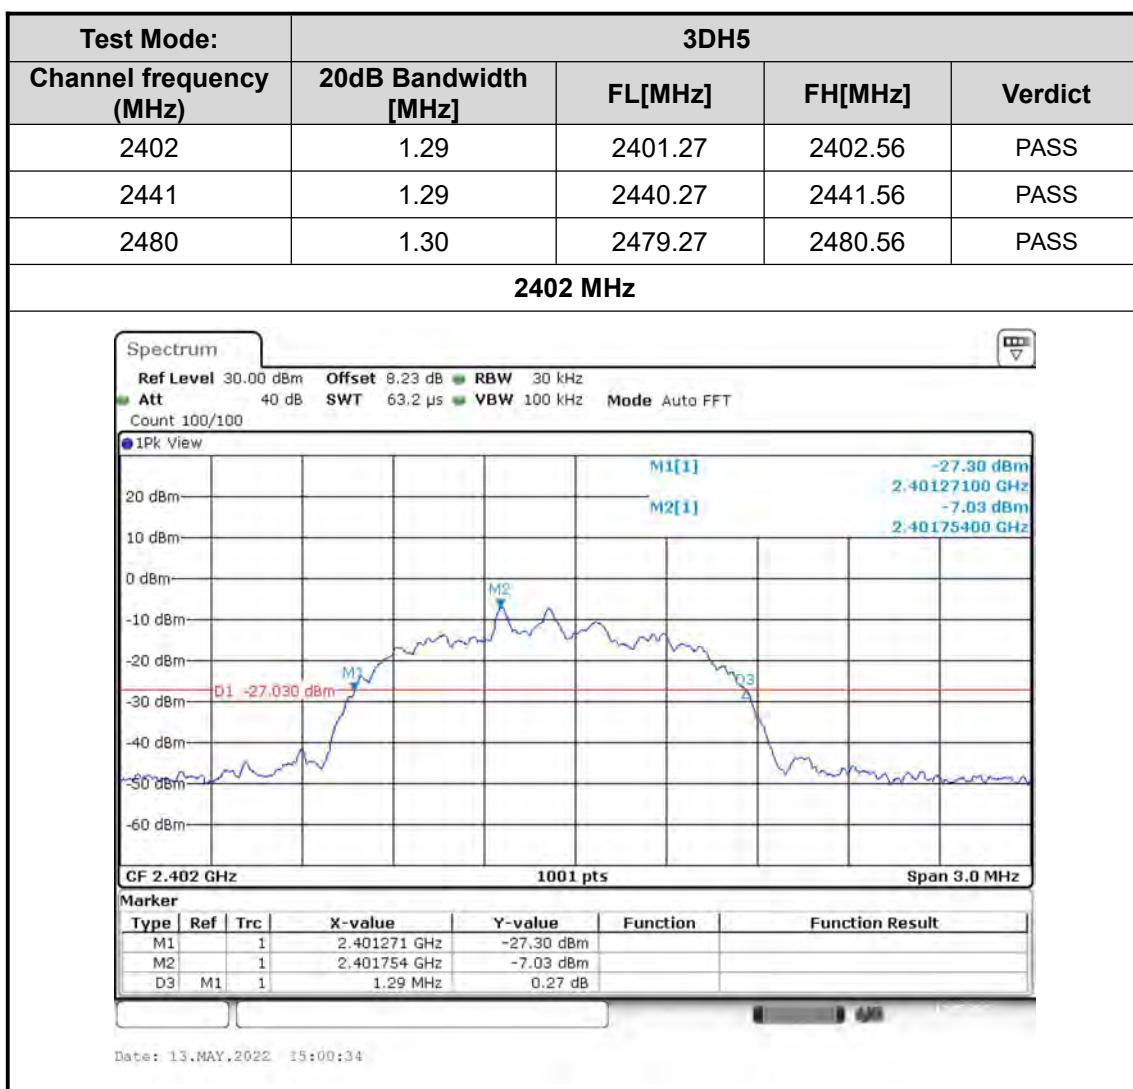

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

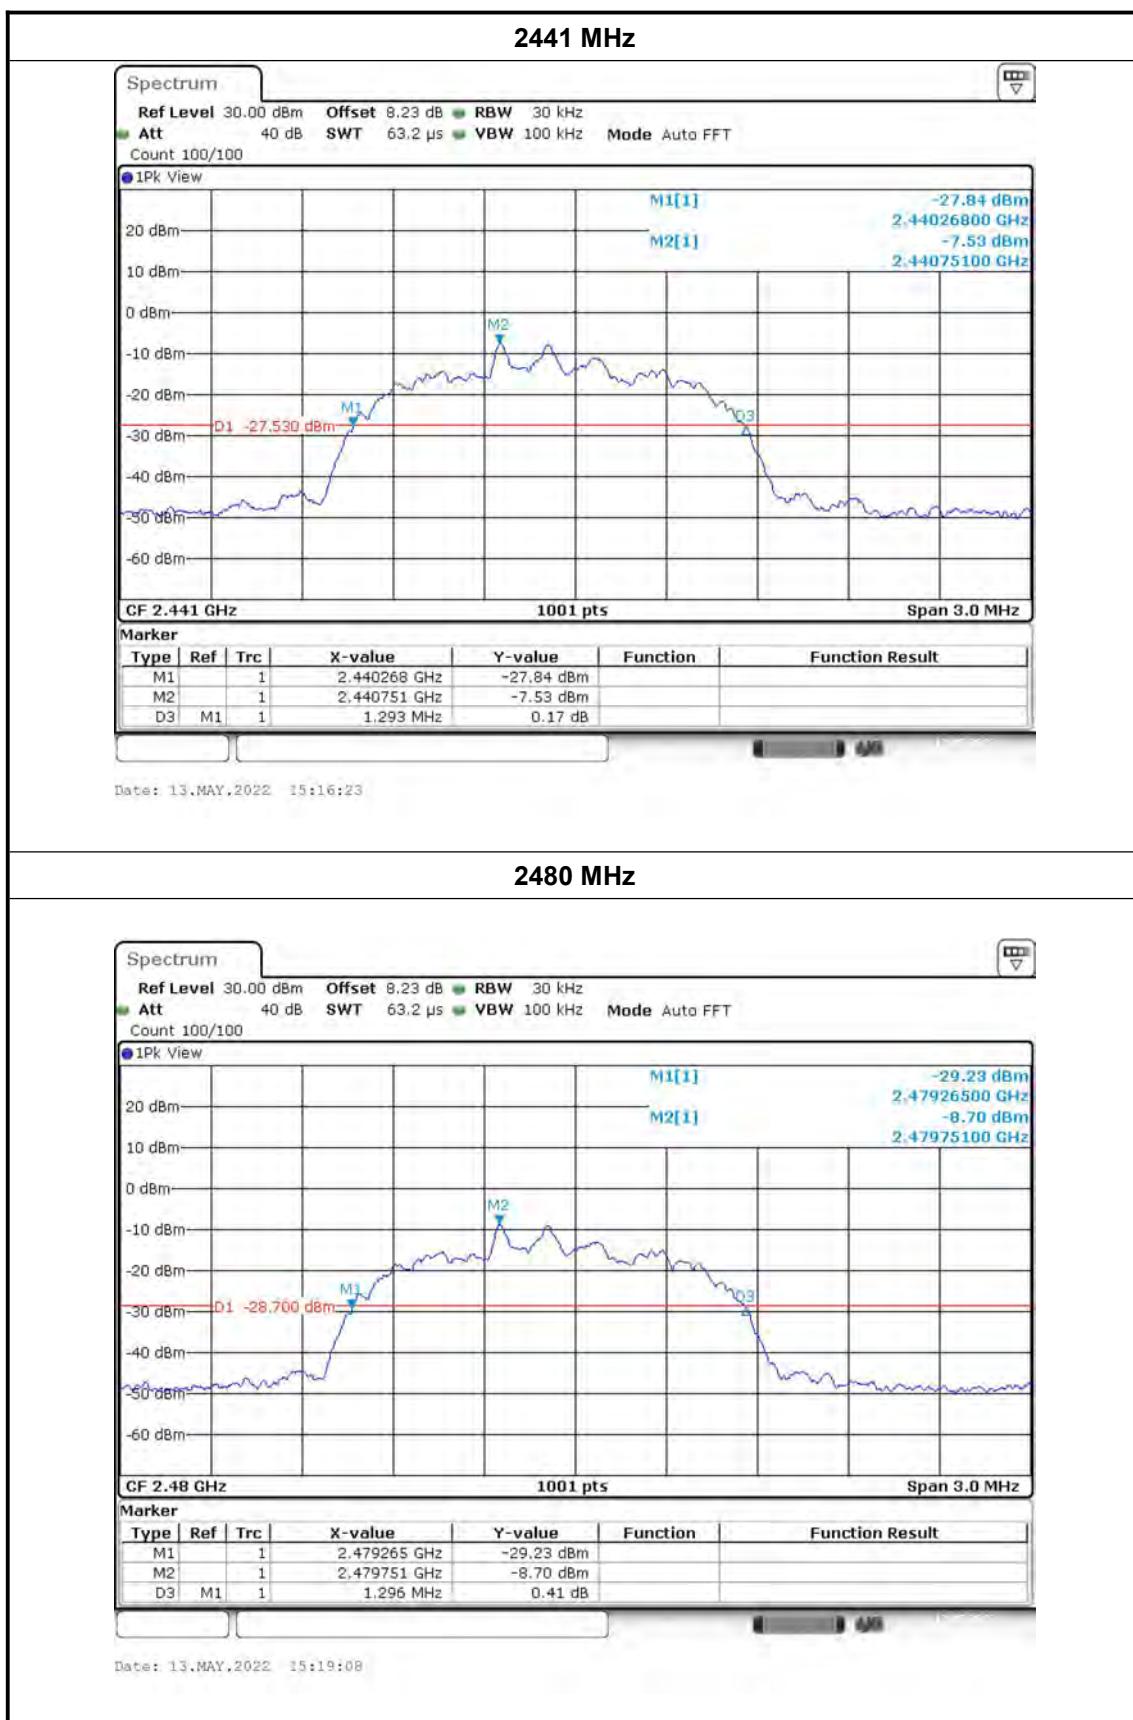

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

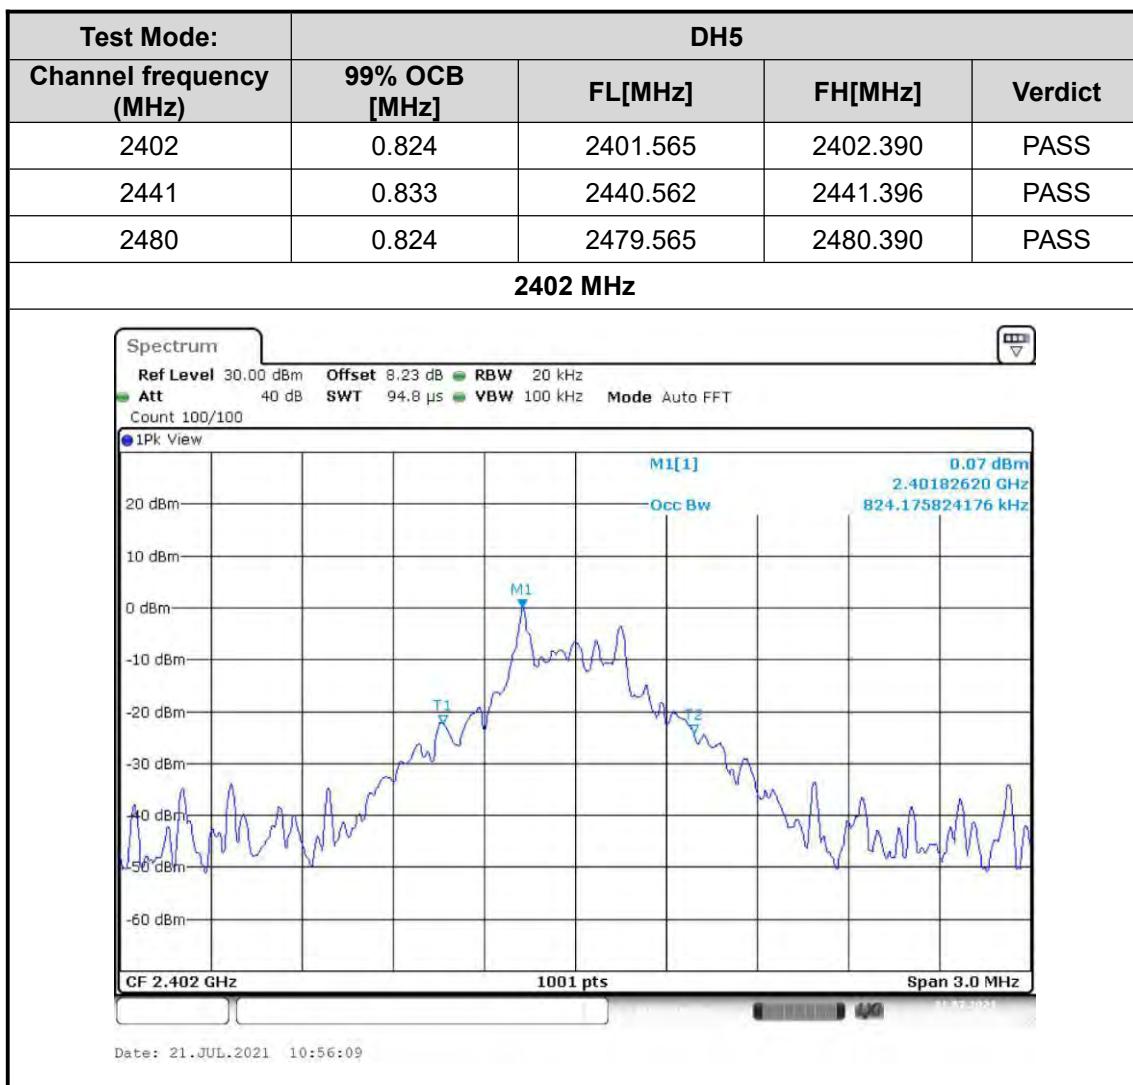


TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

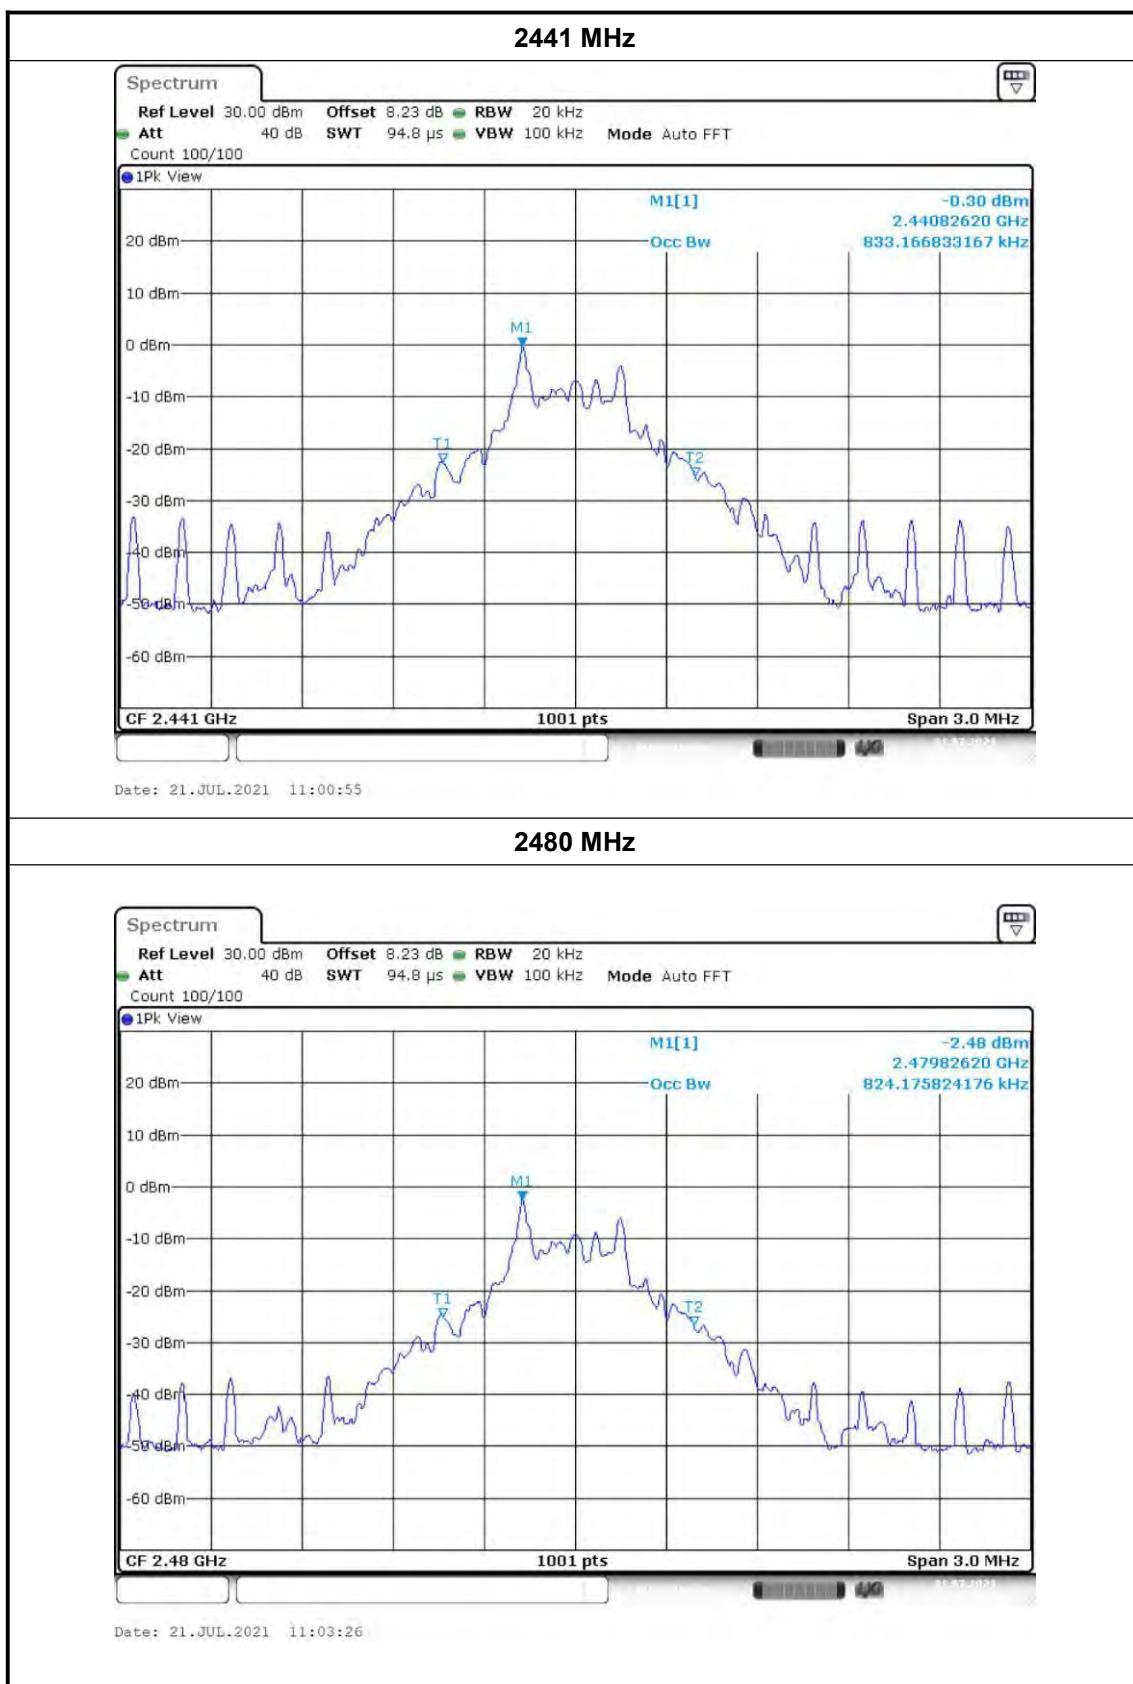


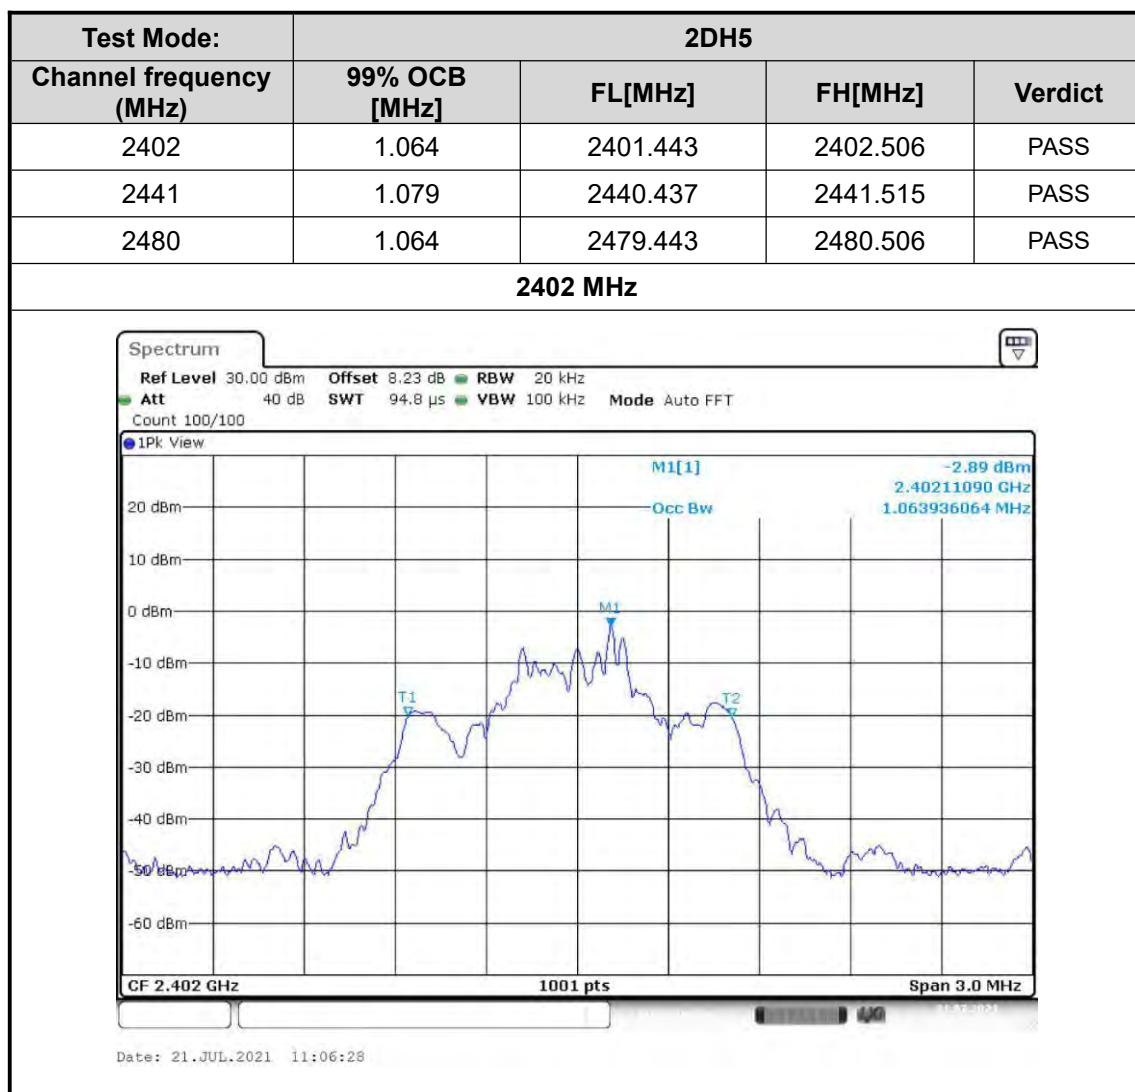

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

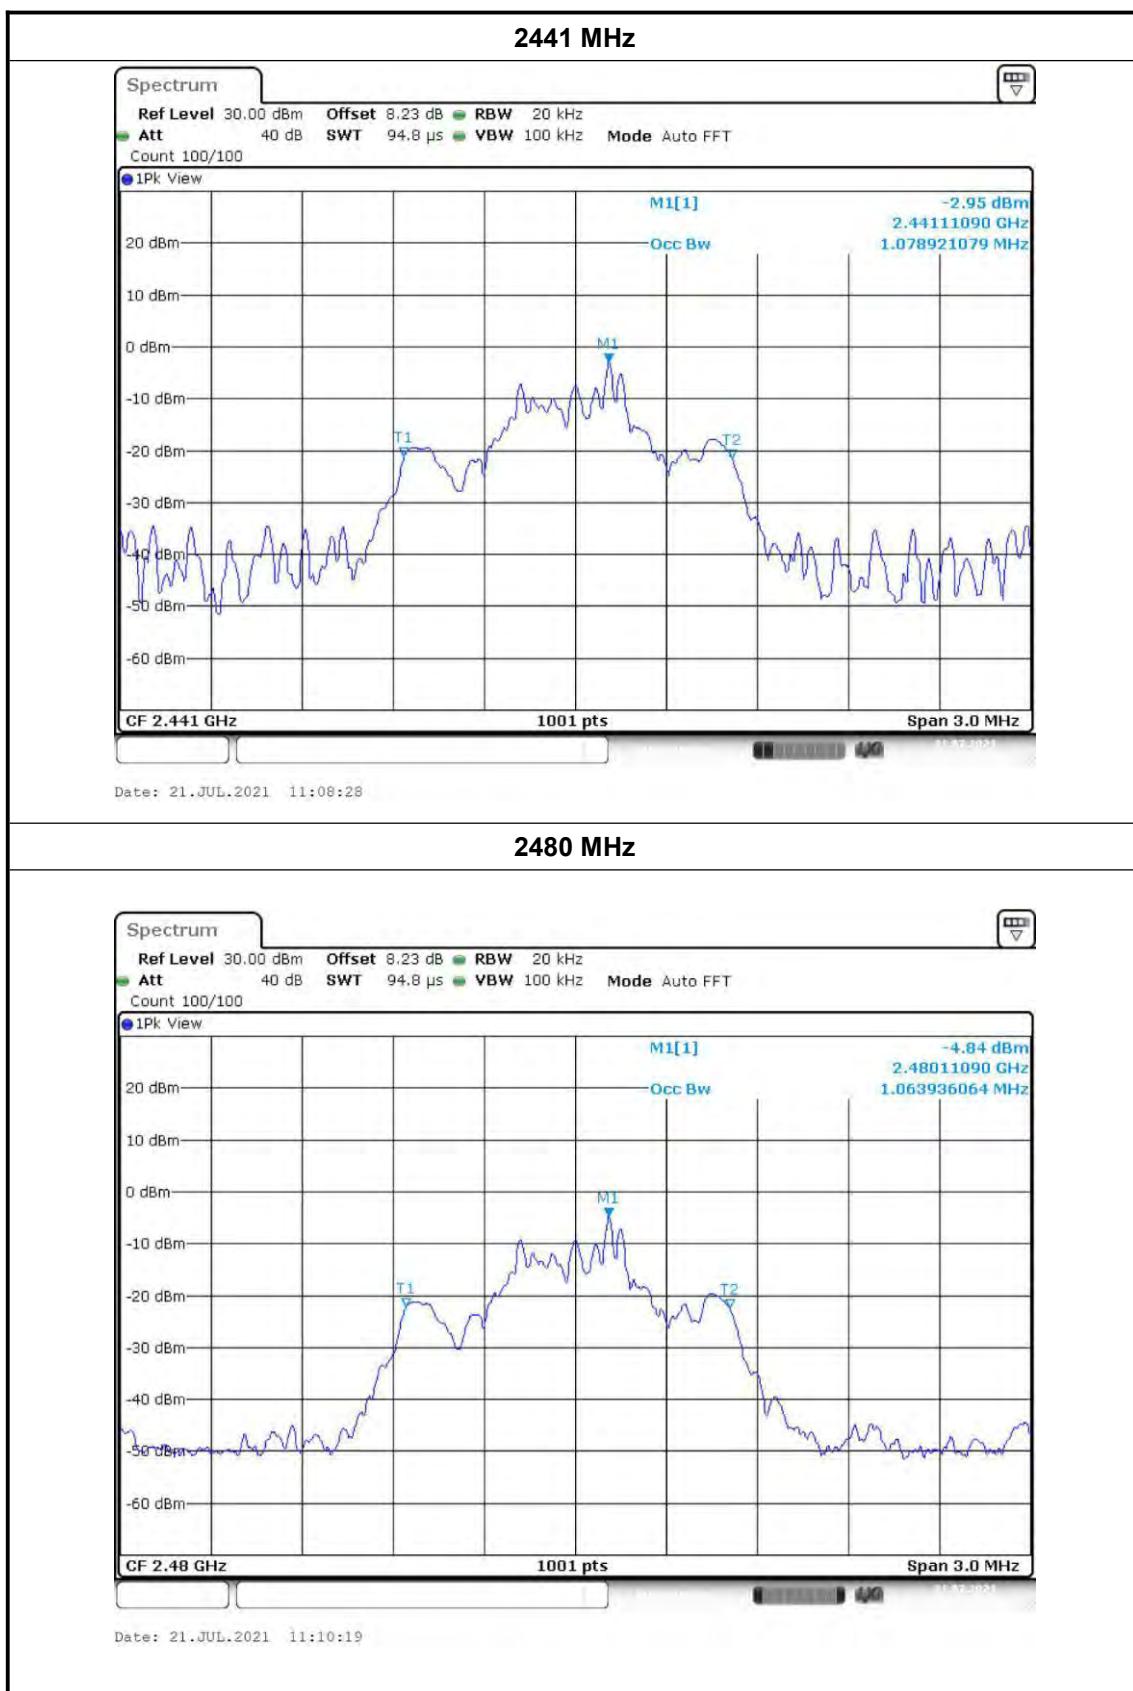


TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

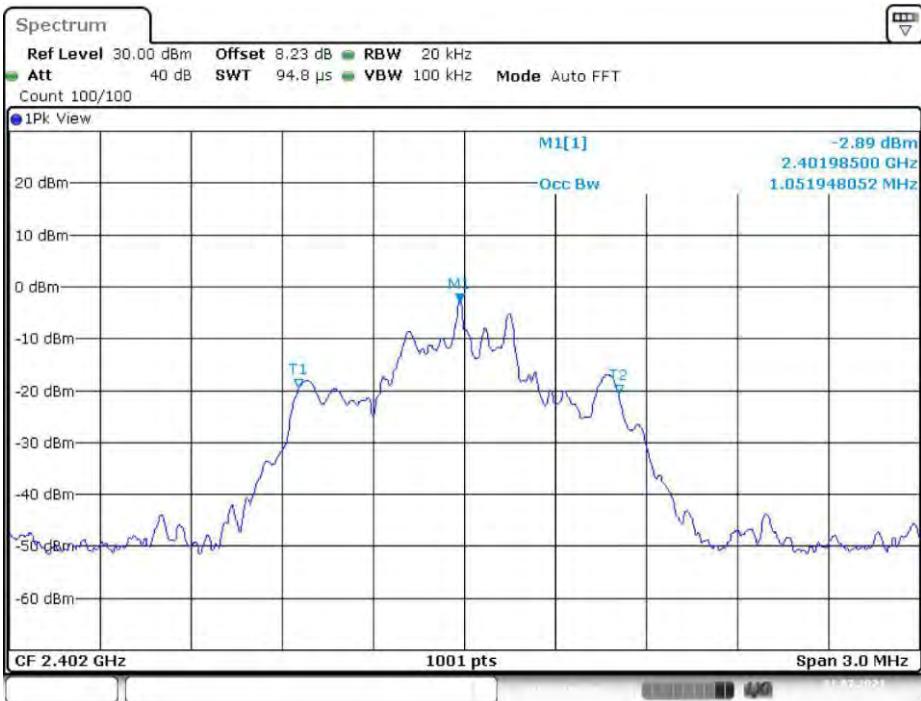3DH5				
Test Mode:	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
Channel frequency (MHz)				
2402	1.052	2401.455	2402.506	PASS
2441	1.058	2440.452	2441.509	PASS
2480	1.055	2479.452	2480.506	PASS
2402 MHz				
 <p>Spectrum</p> <p>Ref Level 30.00 dBm Offset 8.23 dB RBW 20 kHz</p> <p>Att 40 dB SWT 94.8 μs VBW 100 kHz Mode Auto FFT</p> <p>Count 100/100</p> <p>1PK View</p> <p>M1[1] -2.89 dBm 2.40198500 GHz 1.051948052 MHz</p> <p>Occ Bw</p> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 21.JUL.2021 11:13:18</p>				

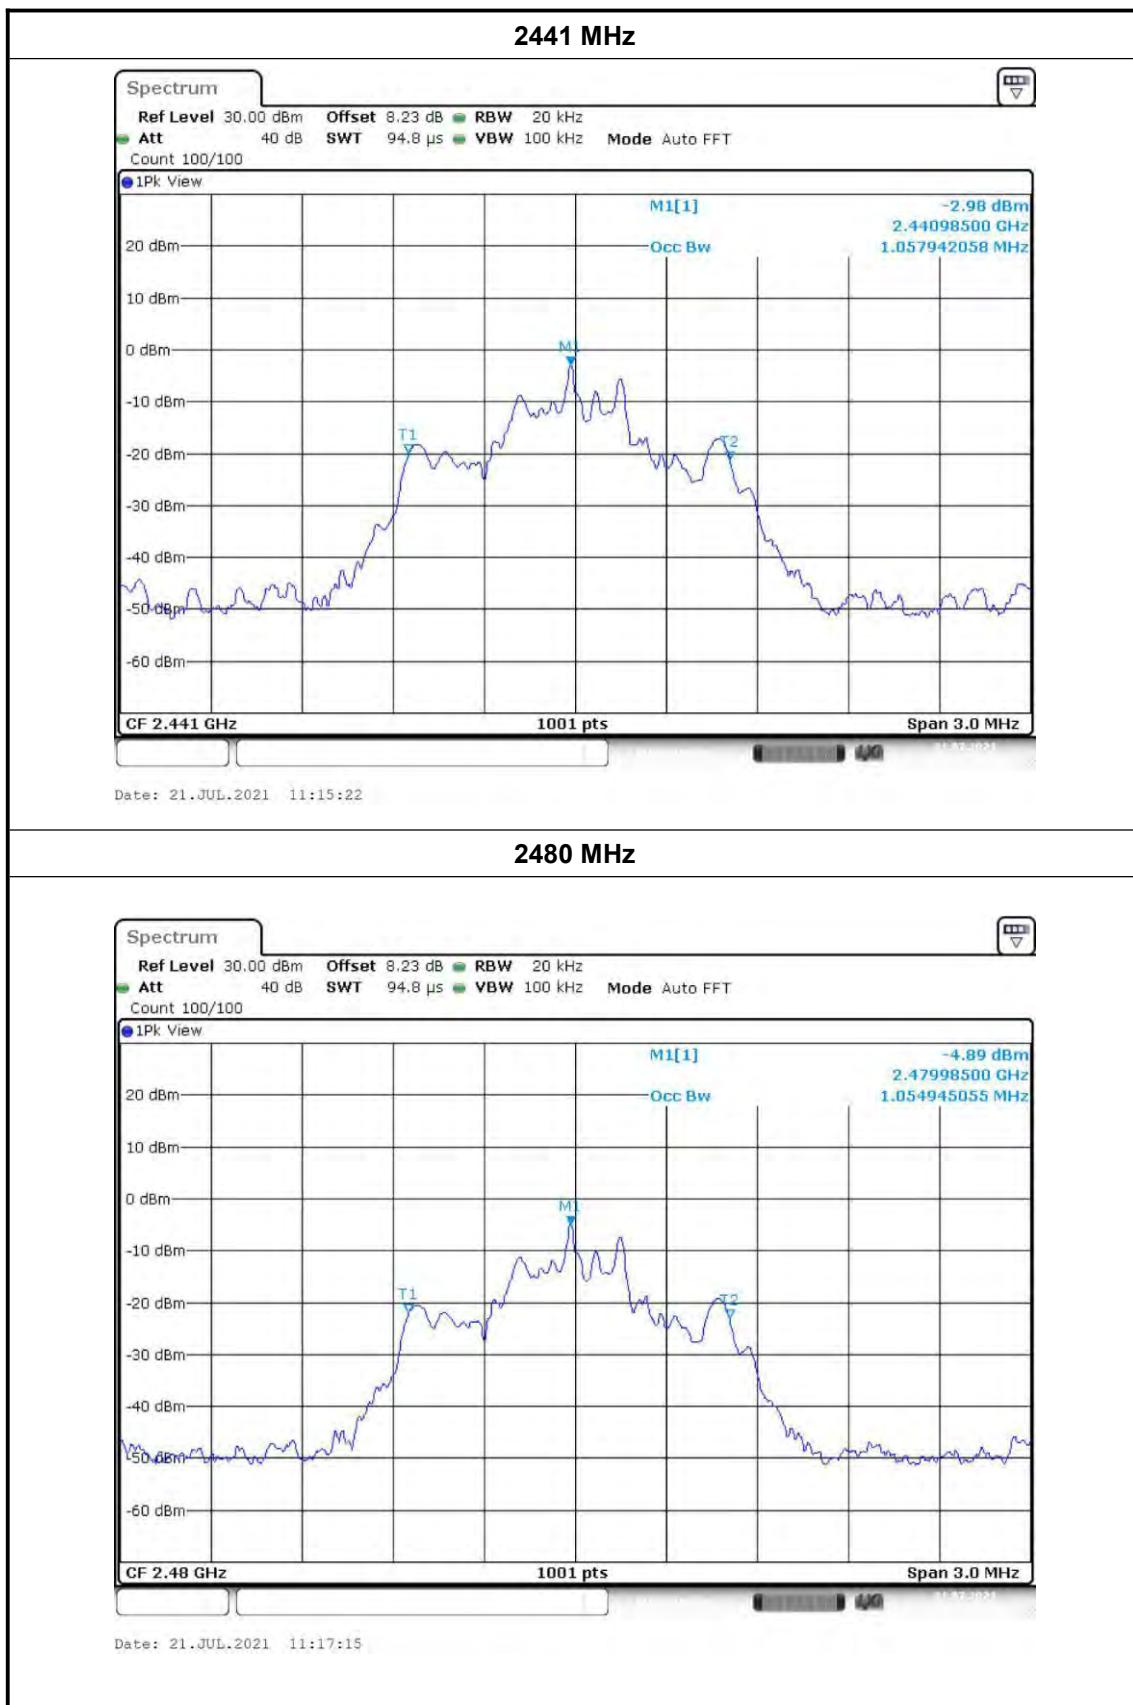

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

3.4. Carrier Frequencies Separation


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration

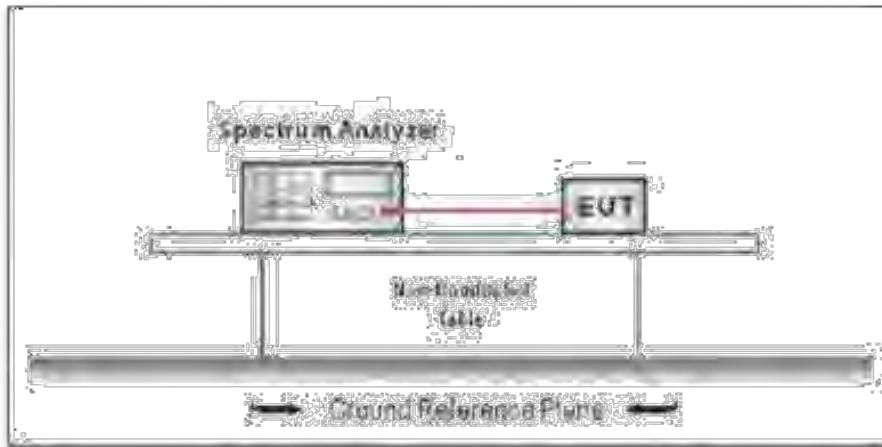

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.

2. Spectrum Setting:

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) ≥ 3 RBW.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.2.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com


Test Results

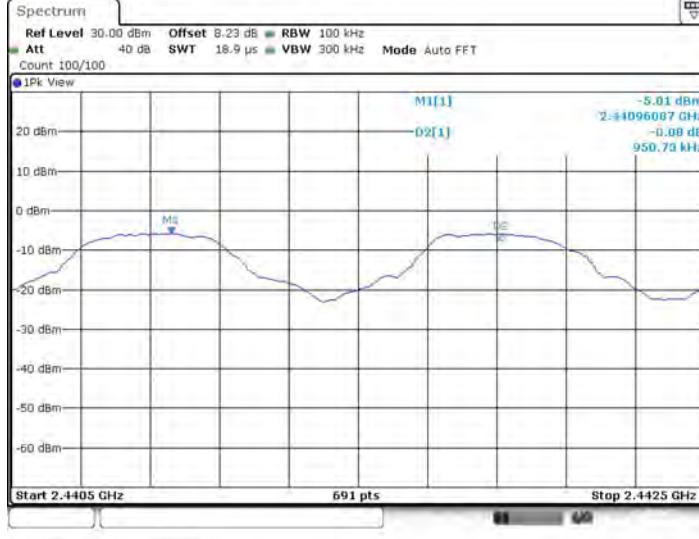
Test Mode:	DH5 Hopping Mode		
Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	1	>=0.64	PASS
DH5 Hopping Mode			
			

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

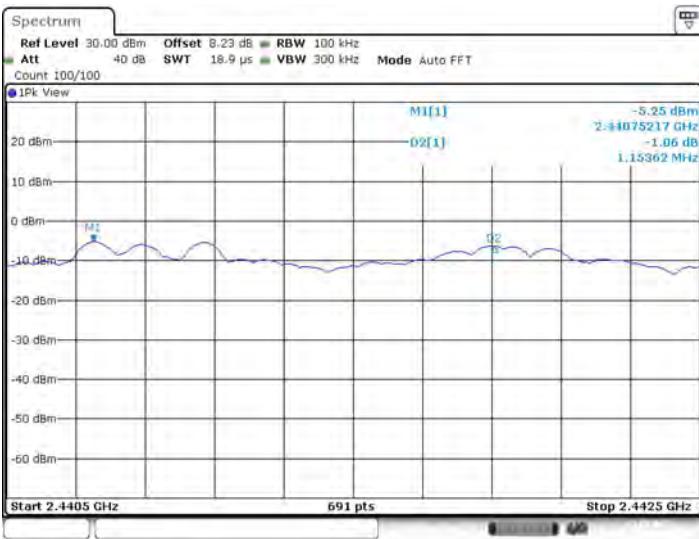Test Mode:		2DH5 Hopping Mode	
Test Mode	Result[MHz]	Limit[MHz]	Verdict
2DH5	1.006	>=0.736	PASS
2DH5 Hopping Mode			
			

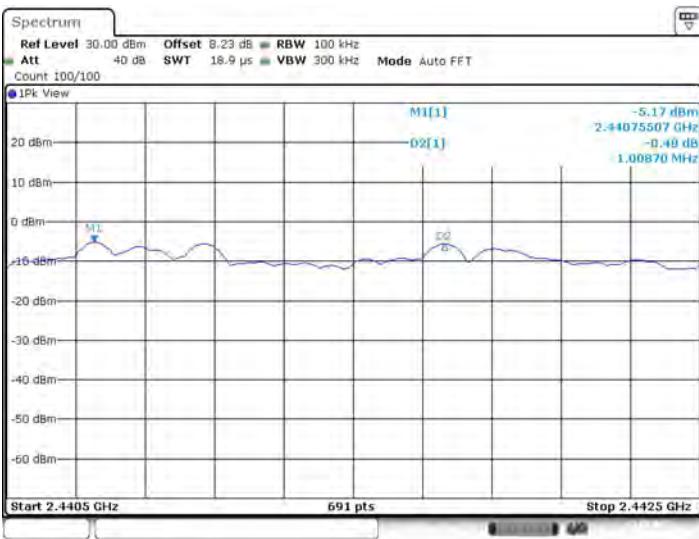
Test Mode:		3DH5 Hopping Mode	
Test Mode	Result[MHz]	Limit[MHz]	Verdict
3DH5	1	>=0.724	PASS
3DH5 Hopping Mode			
			

3.5. Number of Hopping Channel

Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

Test Configuration

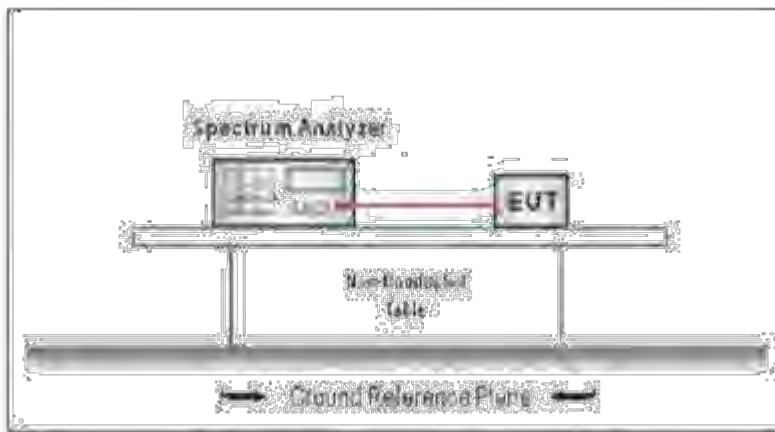


Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW \geq RBW, Sweep time= Auto.

Test Mode


Please refer to the clause 2.2.

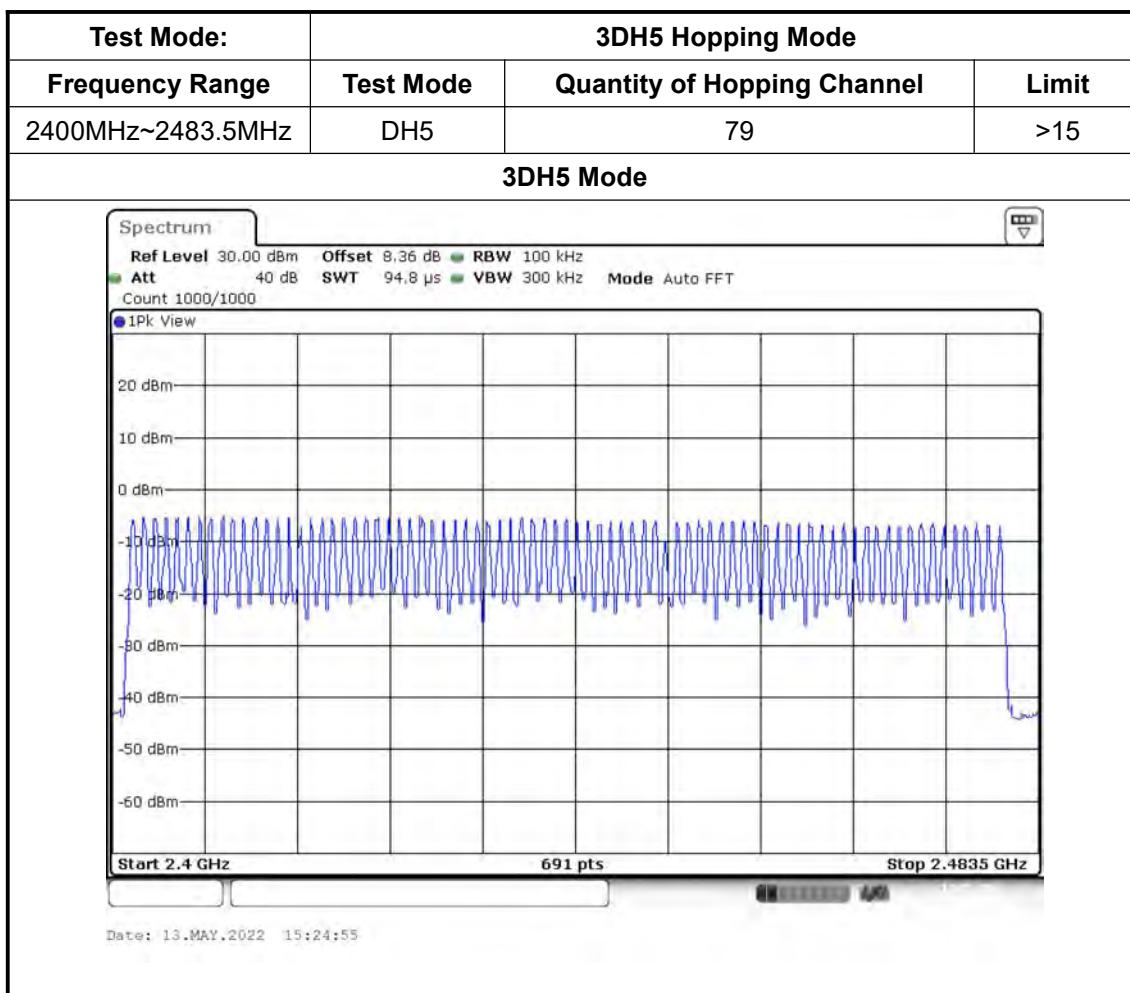Test Result

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

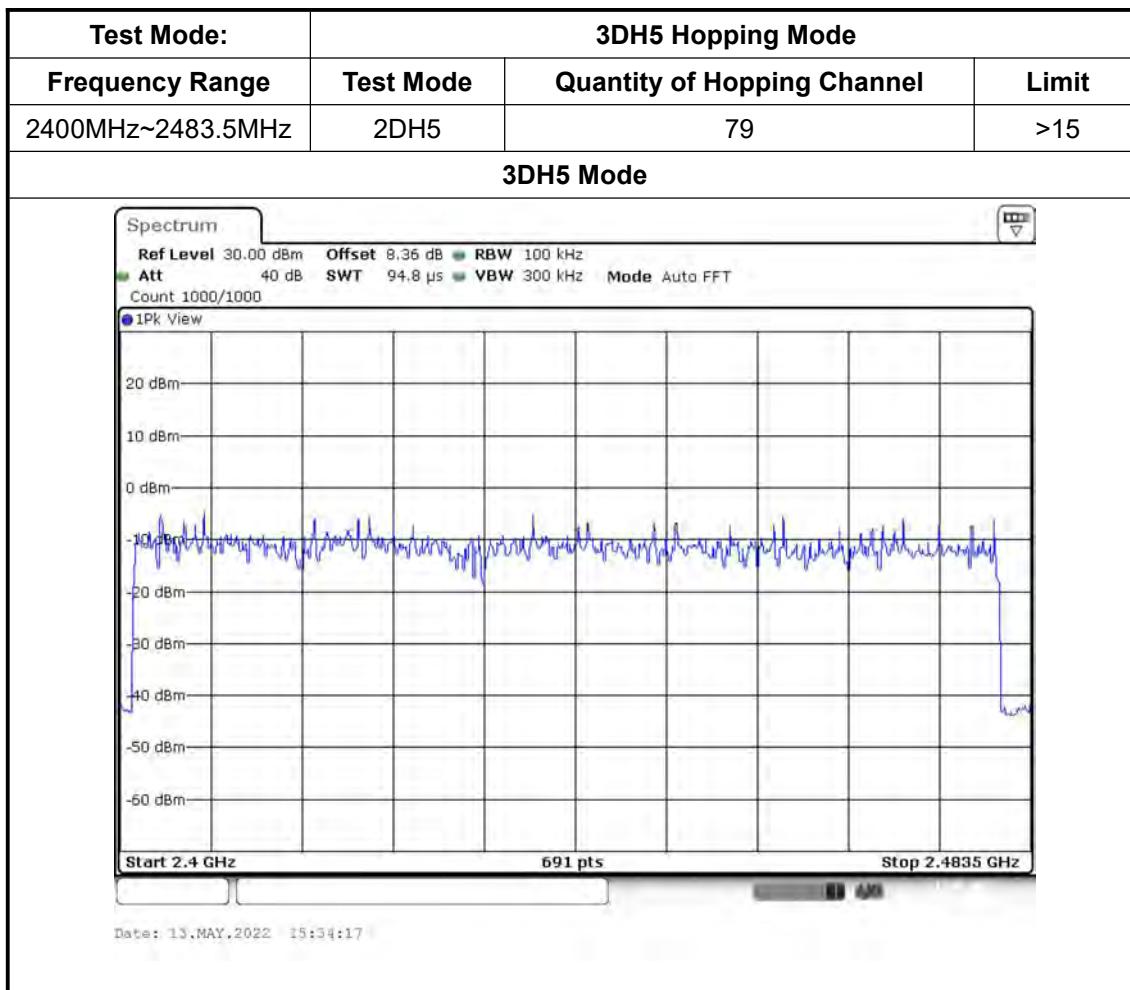

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

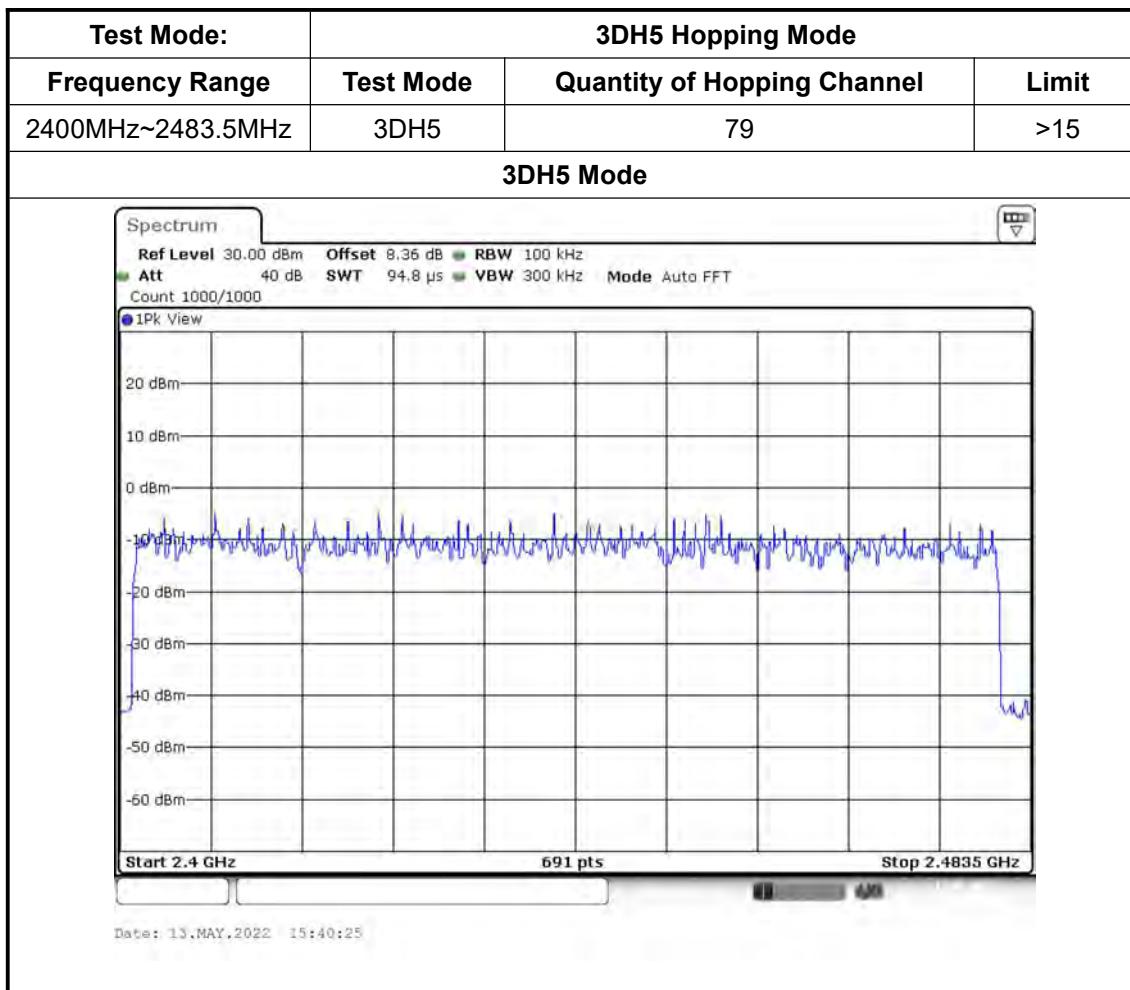

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

3.6. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(1)	Average Time of Occupancy	0.4 sec

Test Configuration

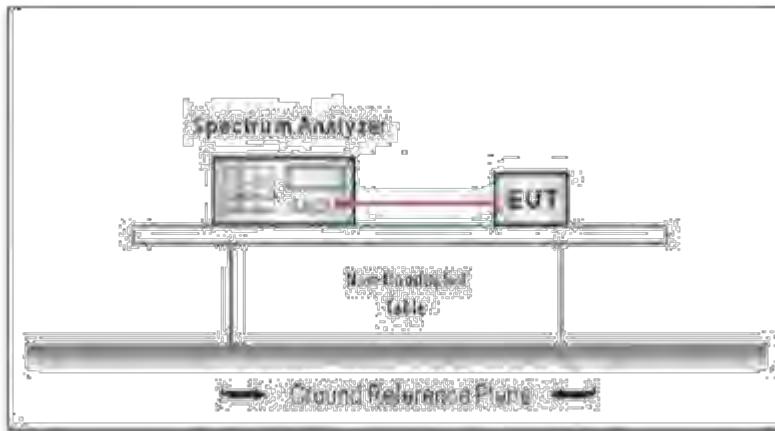

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - (1) Spectrum Setting: $RBW=1\text{MHz}$, $VBW \geq RBW$.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.2

Test Result


Note:


1.Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for DH1, 2DH1, 3DH1


Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for DH3, 2DH3, 3DH3

Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for DH5, 2DH5, 3DH5

2.The 3DH5 modulation is the worst case and recorded in the report .

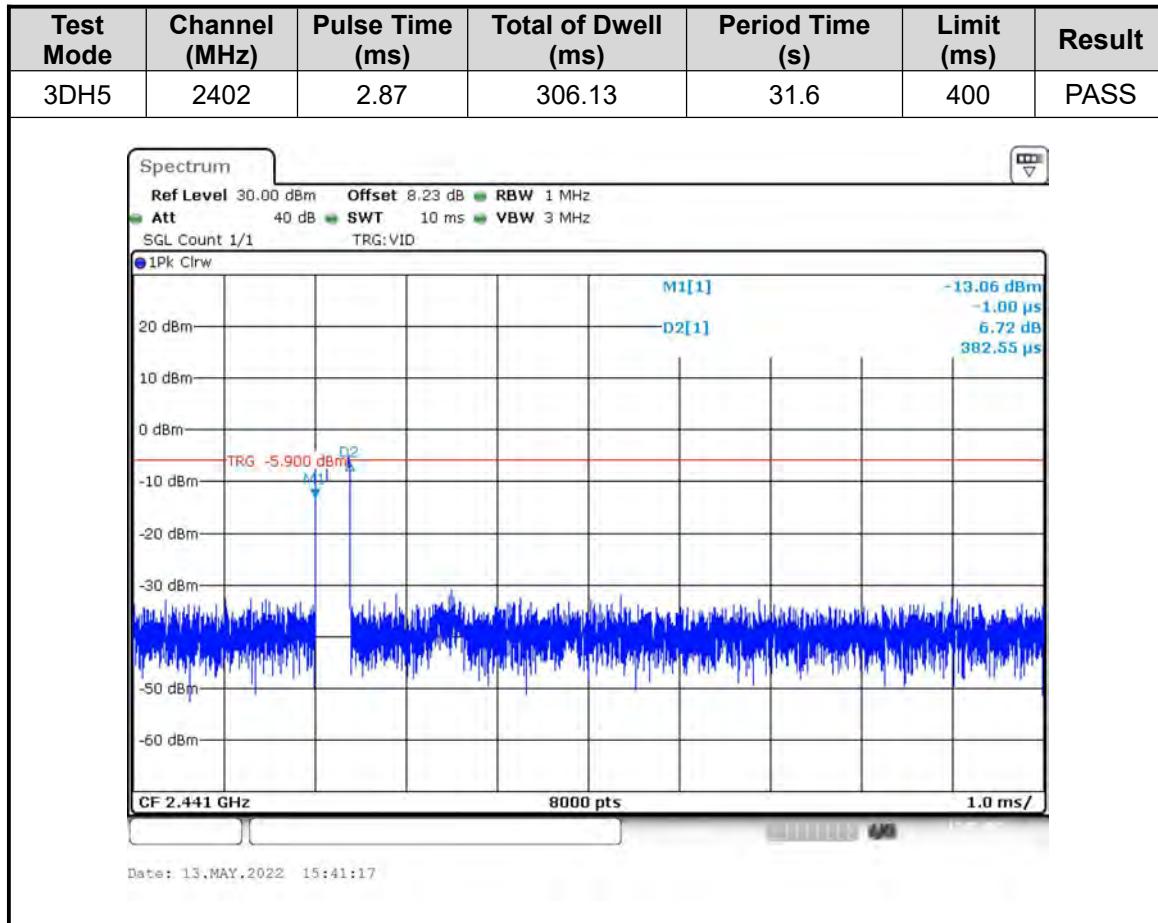

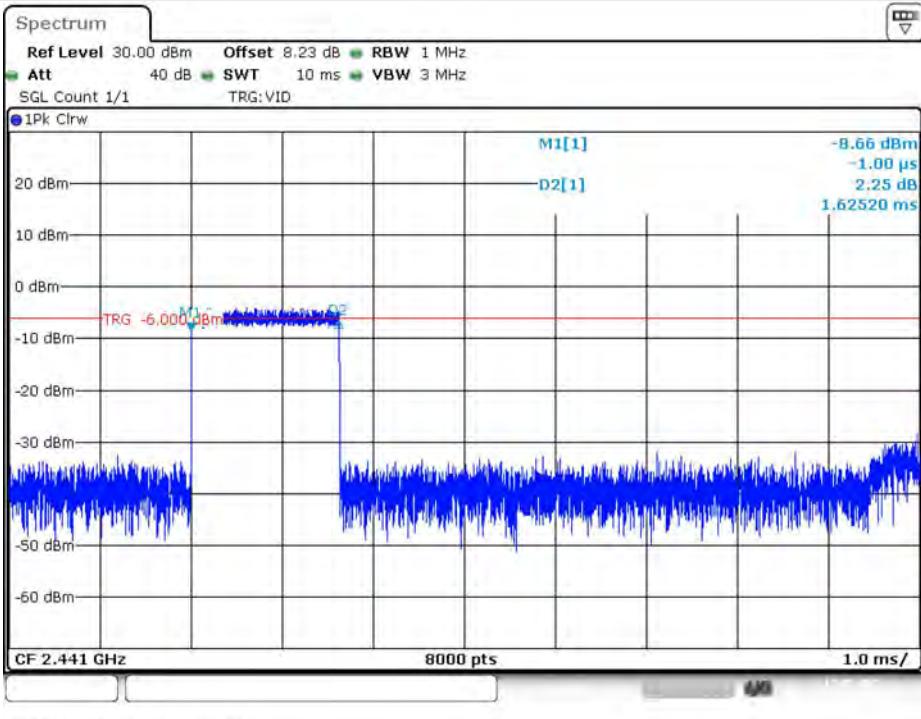Test Mode	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
3DH5	2441	2.87	306.13	31.6	400	PASS
 <p>Date: 13.MAY.2022 15:41:49</p>						

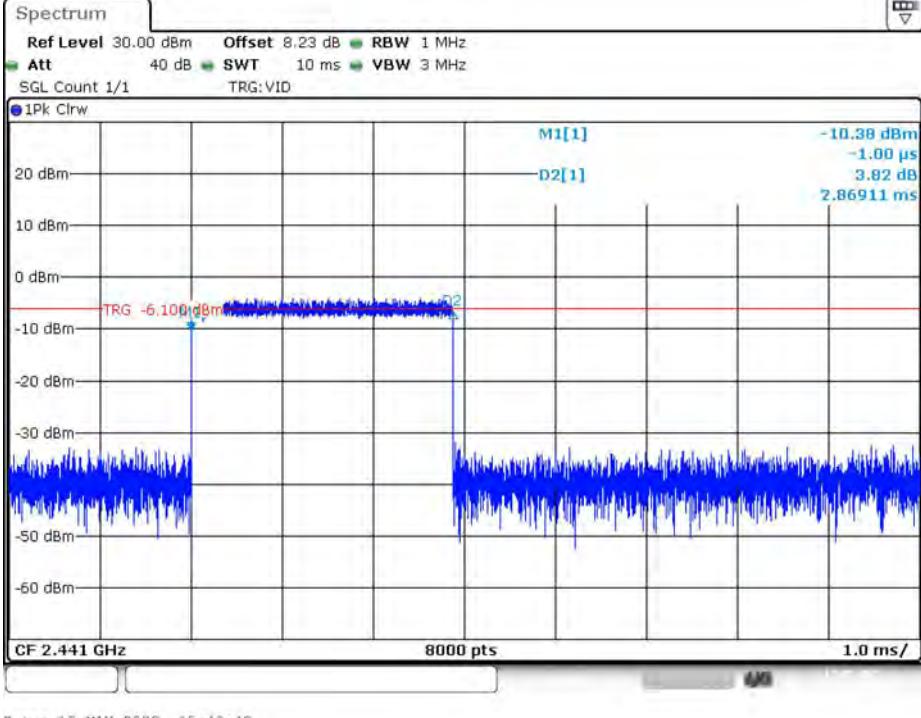Test Mode	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
3DH5	2480	2.87	306.13	31.6	400	PASS
 <p>Date: 13.MAY.2022 15:40:42</p>						

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com


3.7. Band Edge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

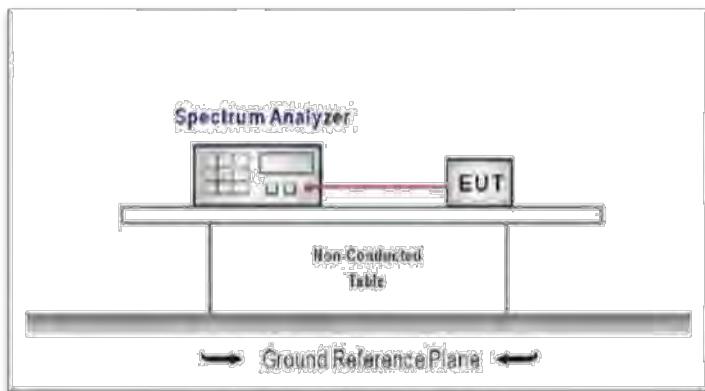

TEST PROCEDURE

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.

2. Spectrum Setting:

RBW=100KHz

VBW=3*RBW.

Detector function: Peak.

Trace: Max hold.


Sweep = Auto couple.

Allow the trace to stabilize.

TEST MODE:

Please refer to the clause 2.2.

TEST RESULTS


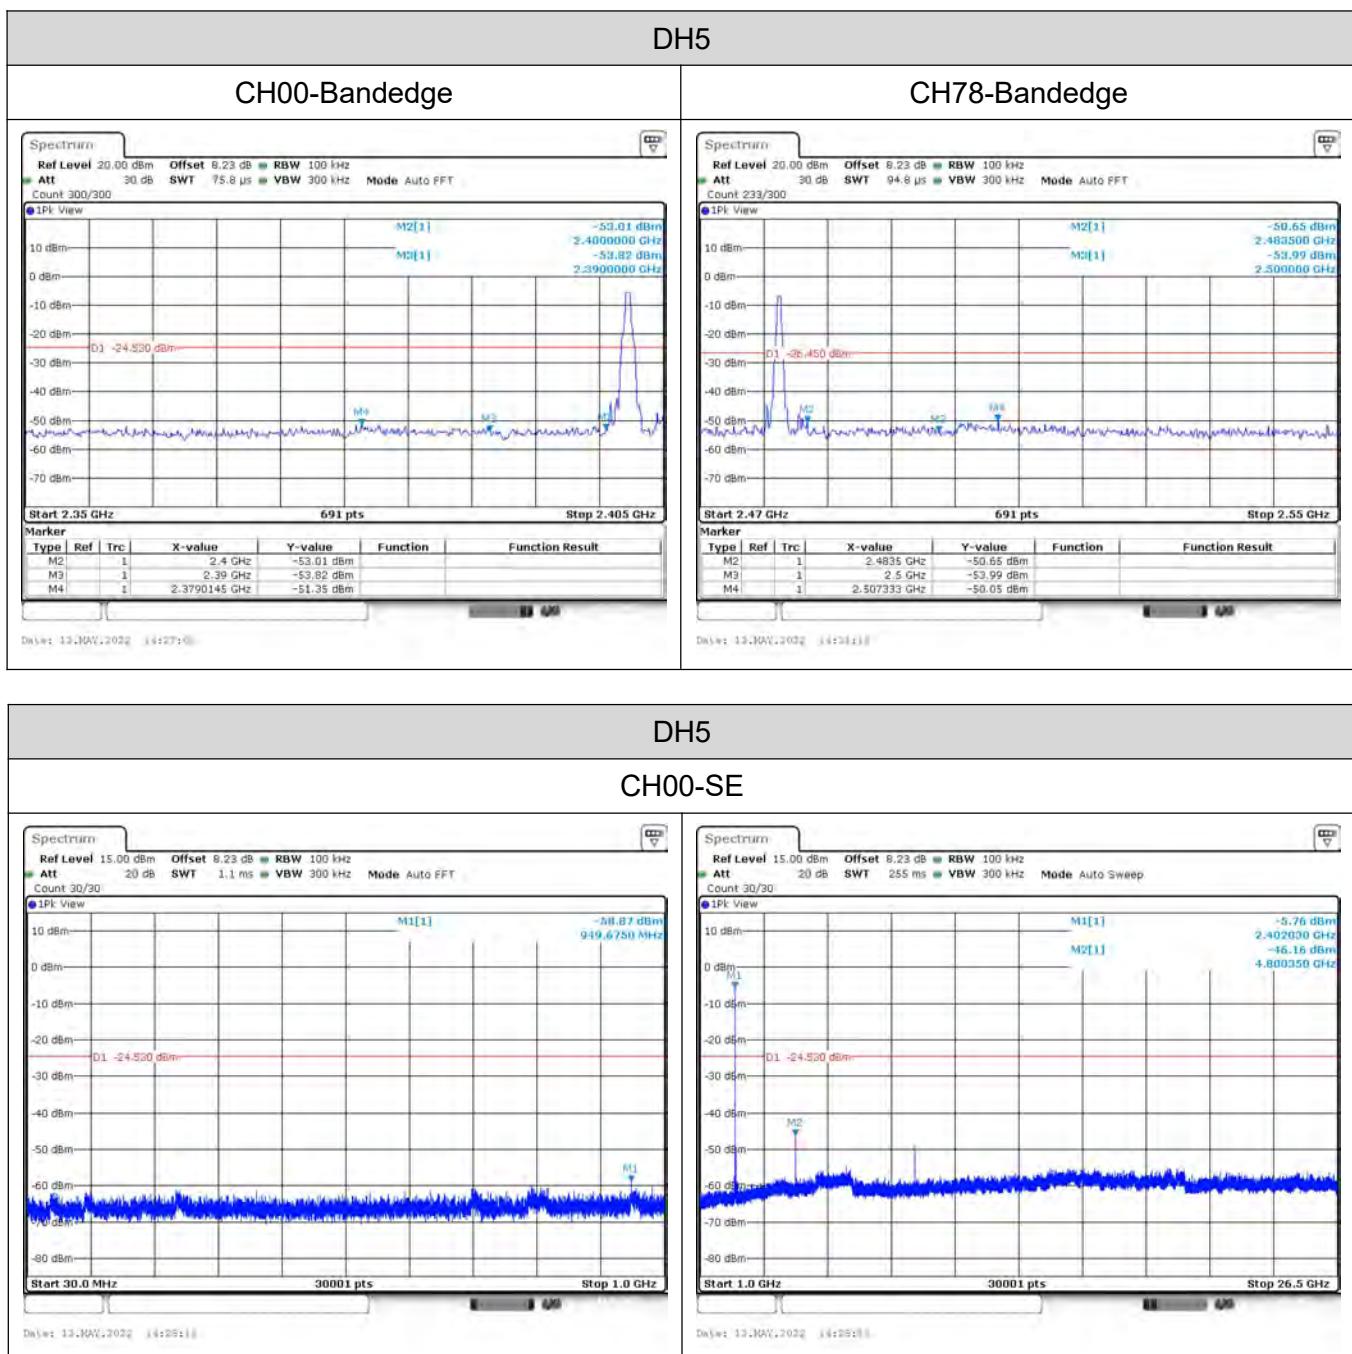


TRF No. FCC Part 15.247_R1



Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

CH39-SE

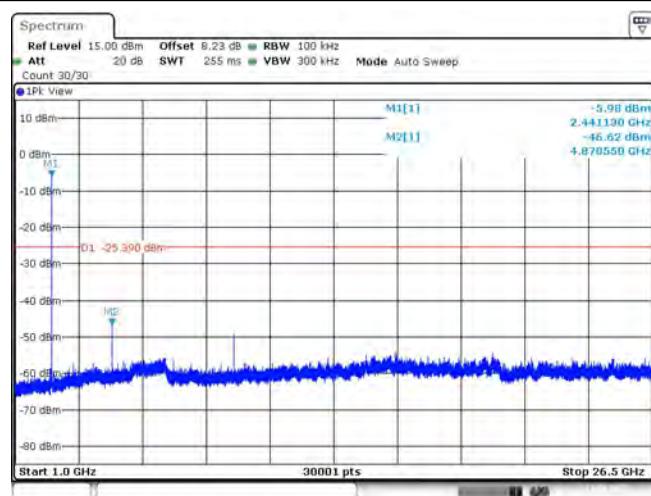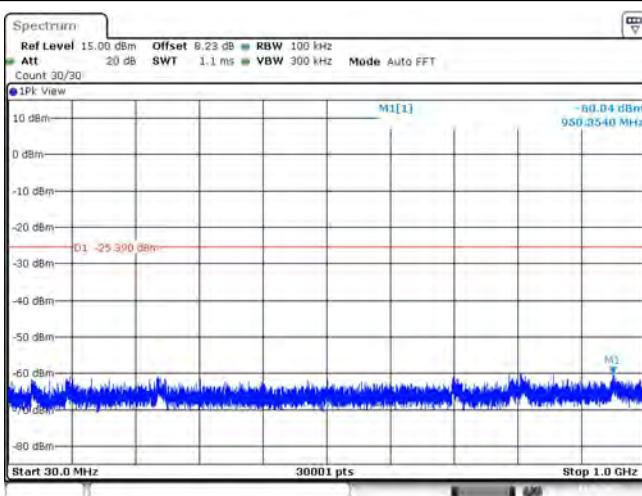



CH78-SE

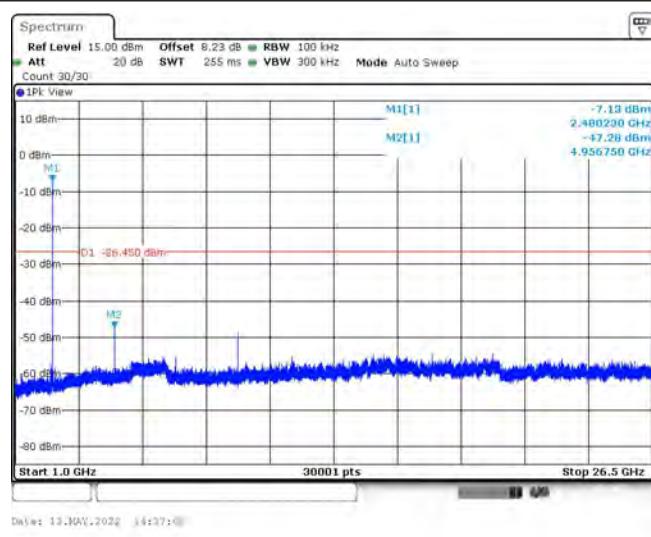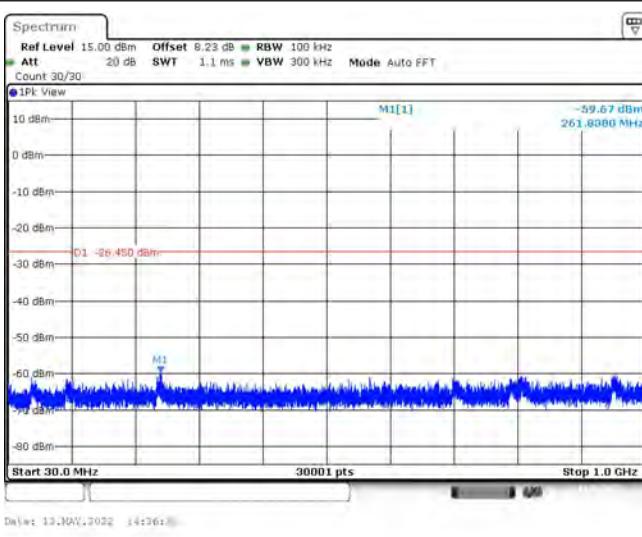

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

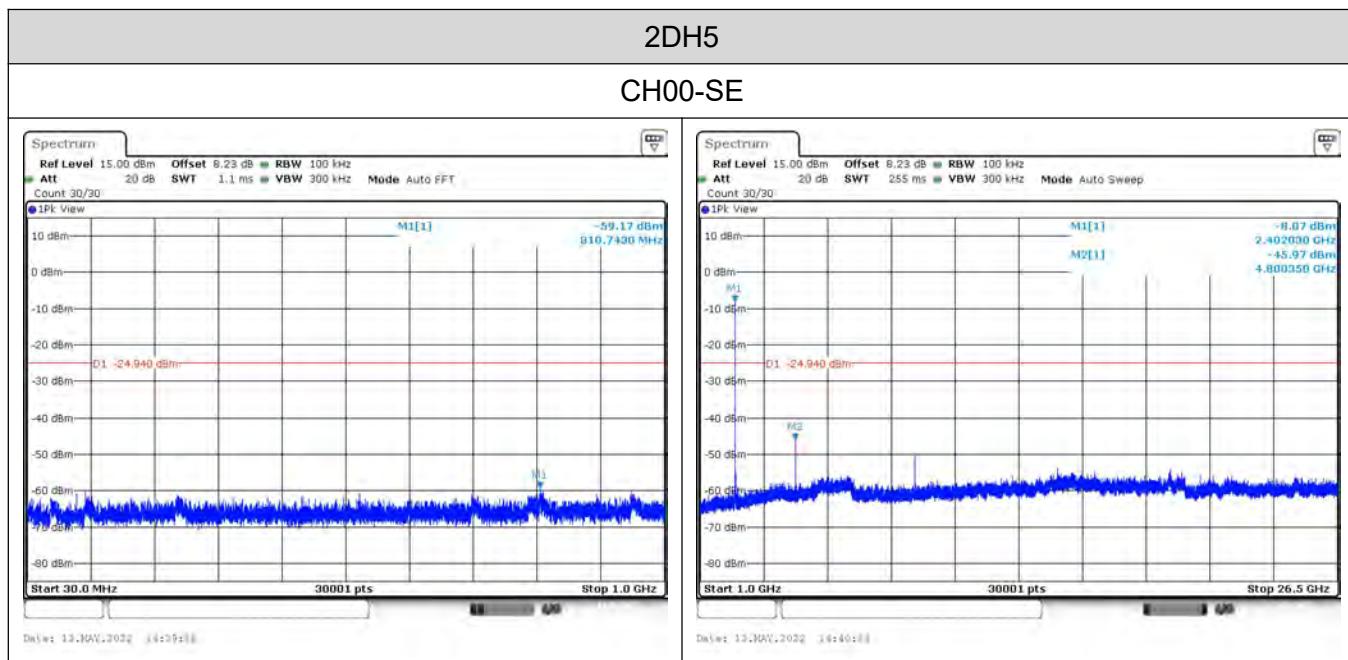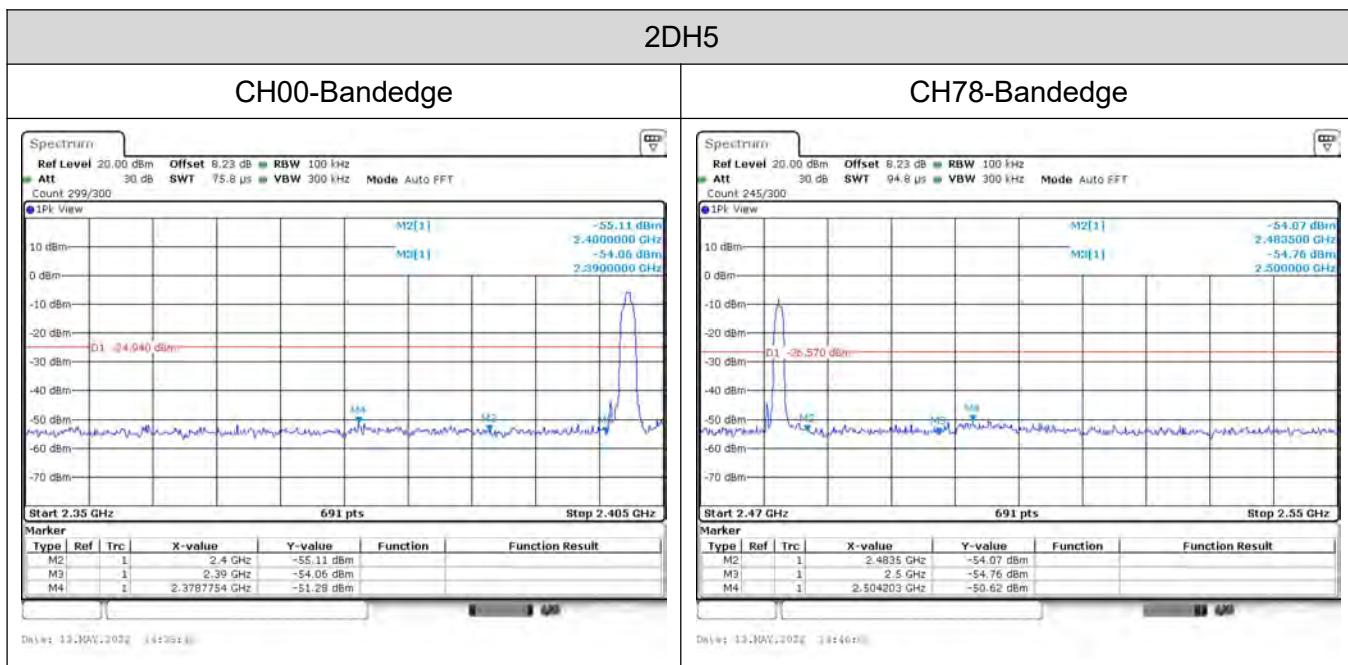


TRF No. FCC Part 15.247_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

CH39-SE

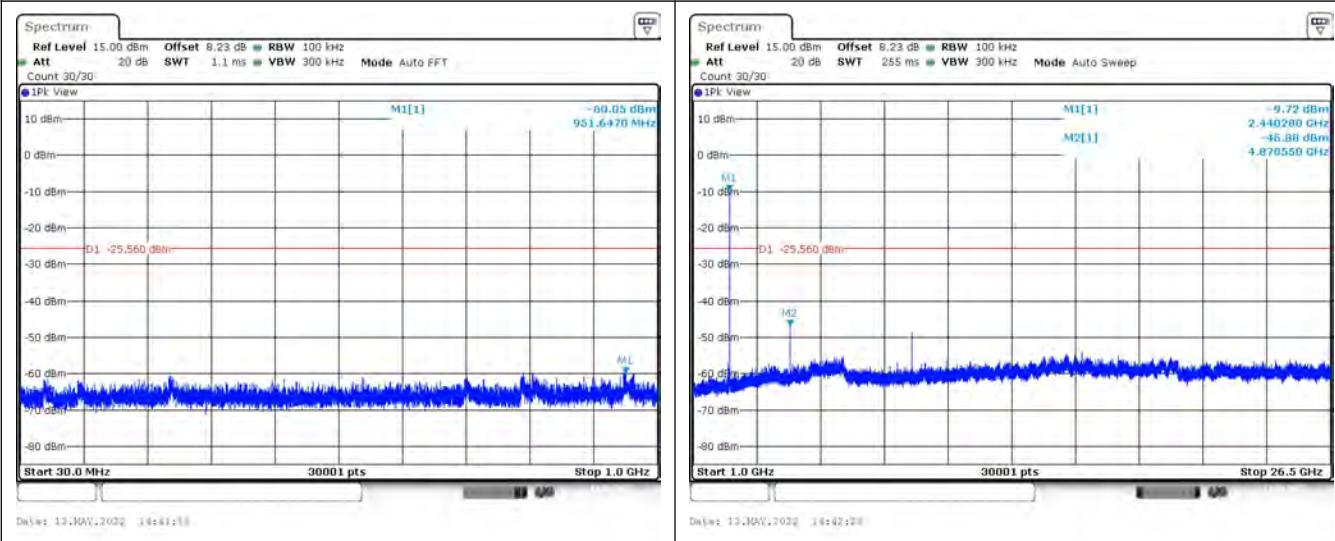



CH78-SE

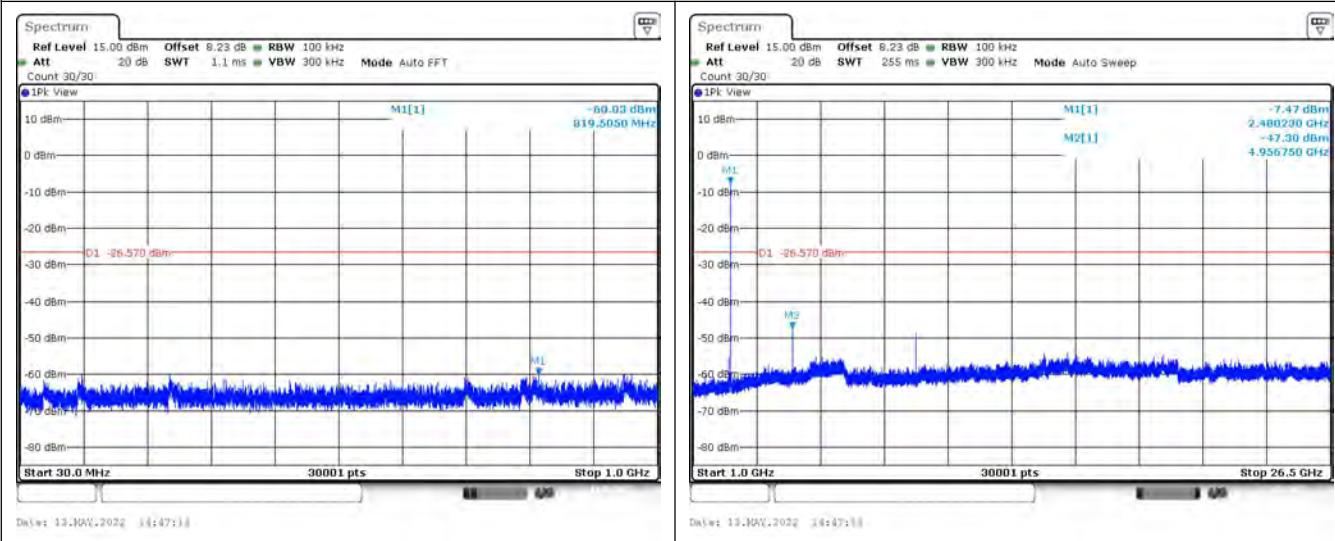

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

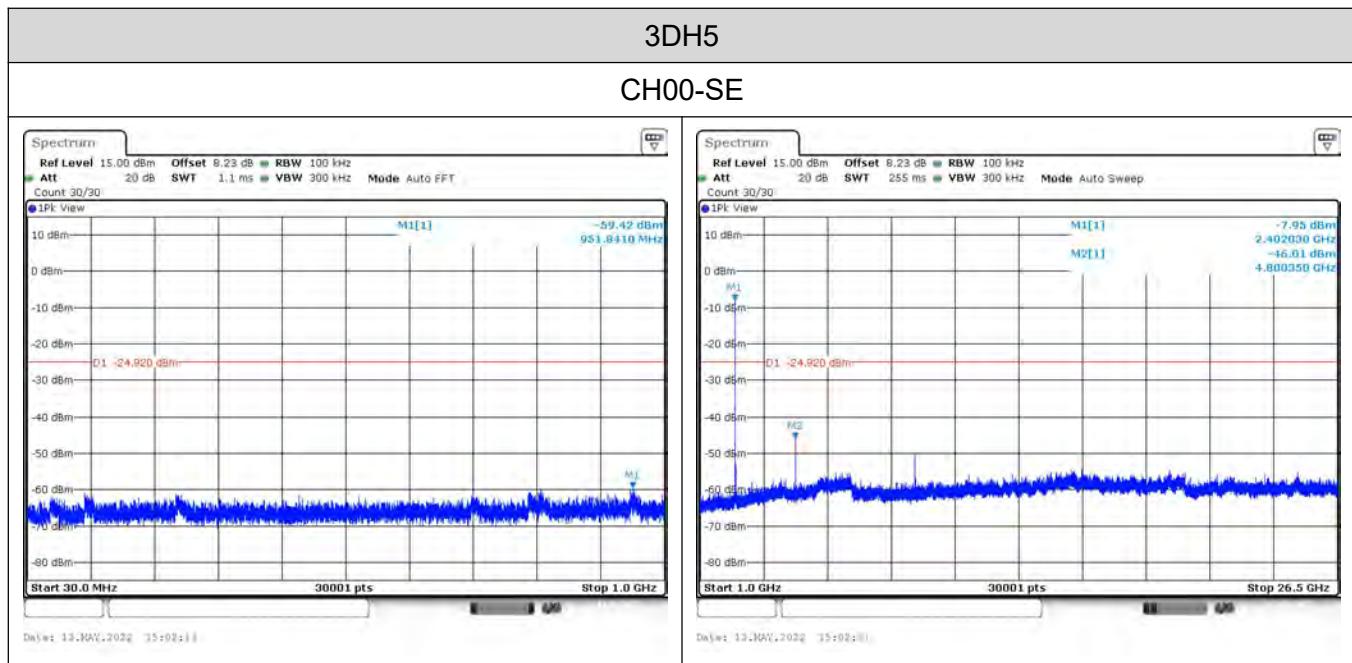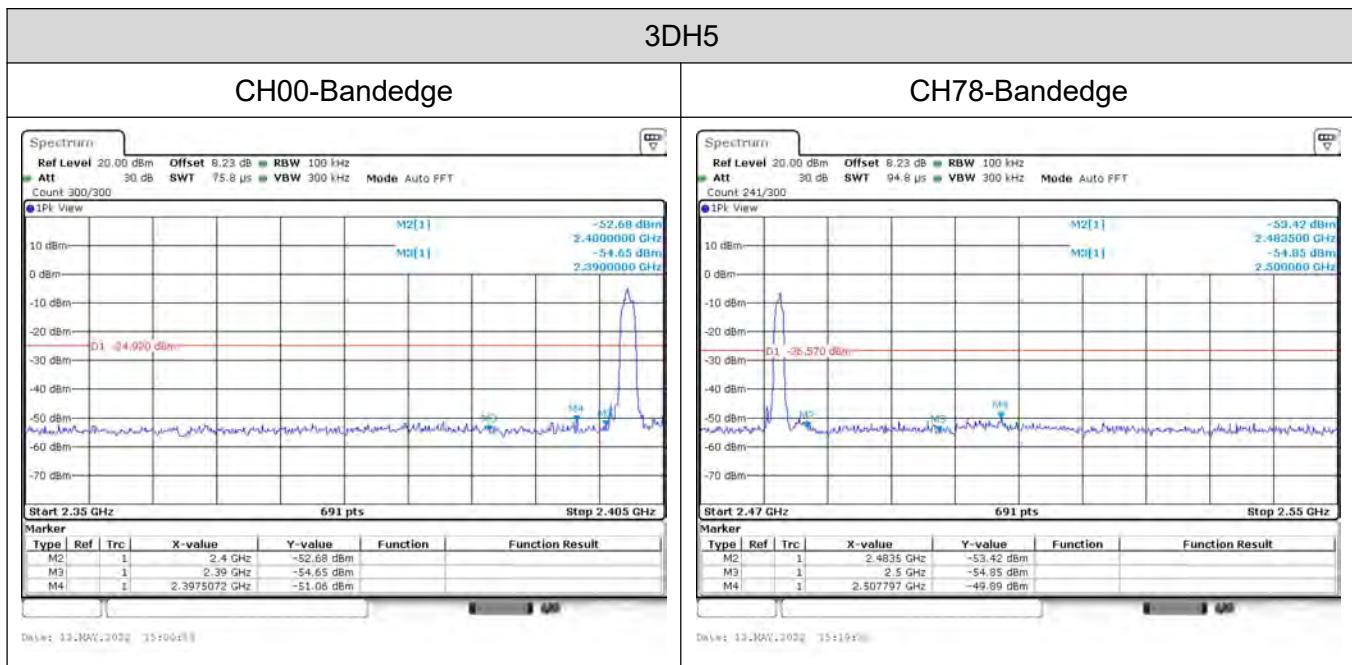


TRF No. FCC Part 15.247_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

CH39-SE

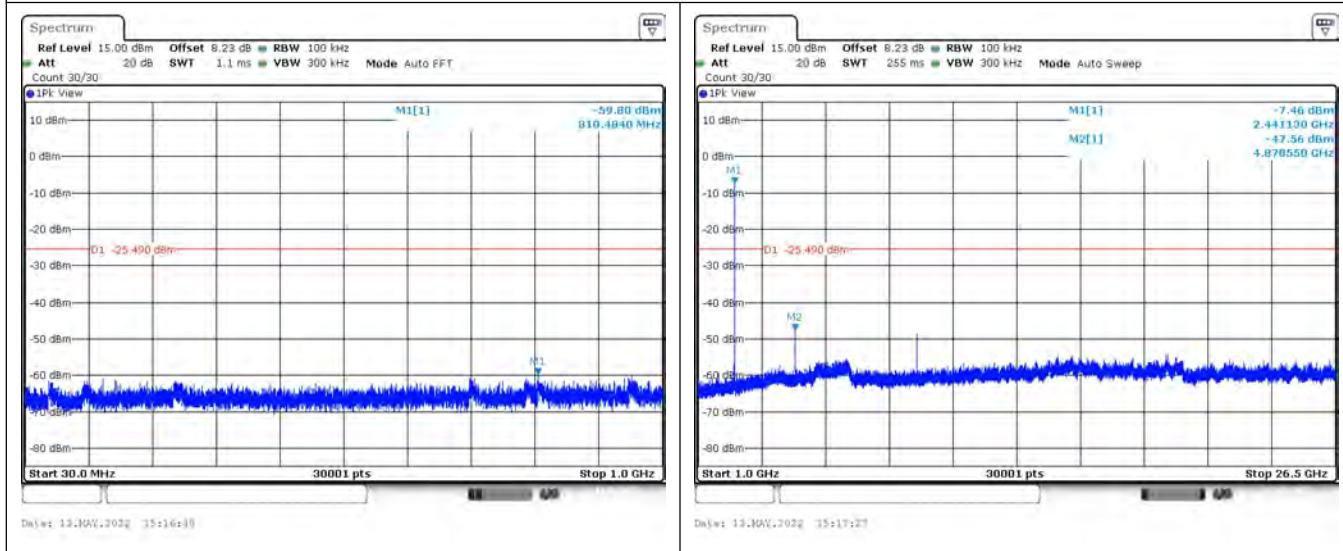


CH78-SE

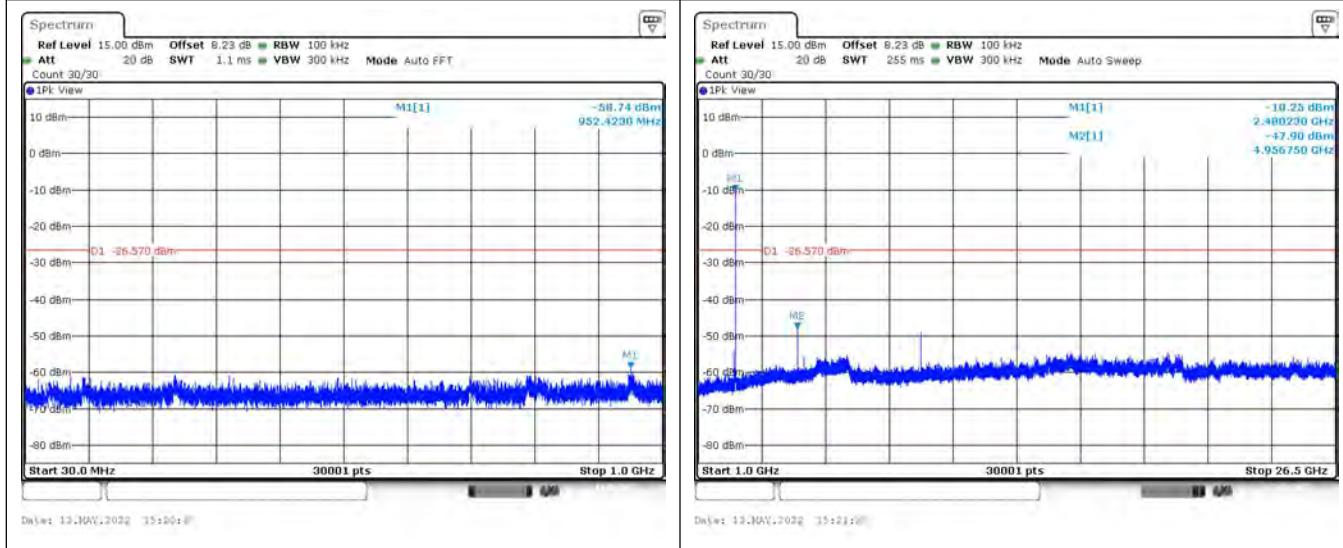

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

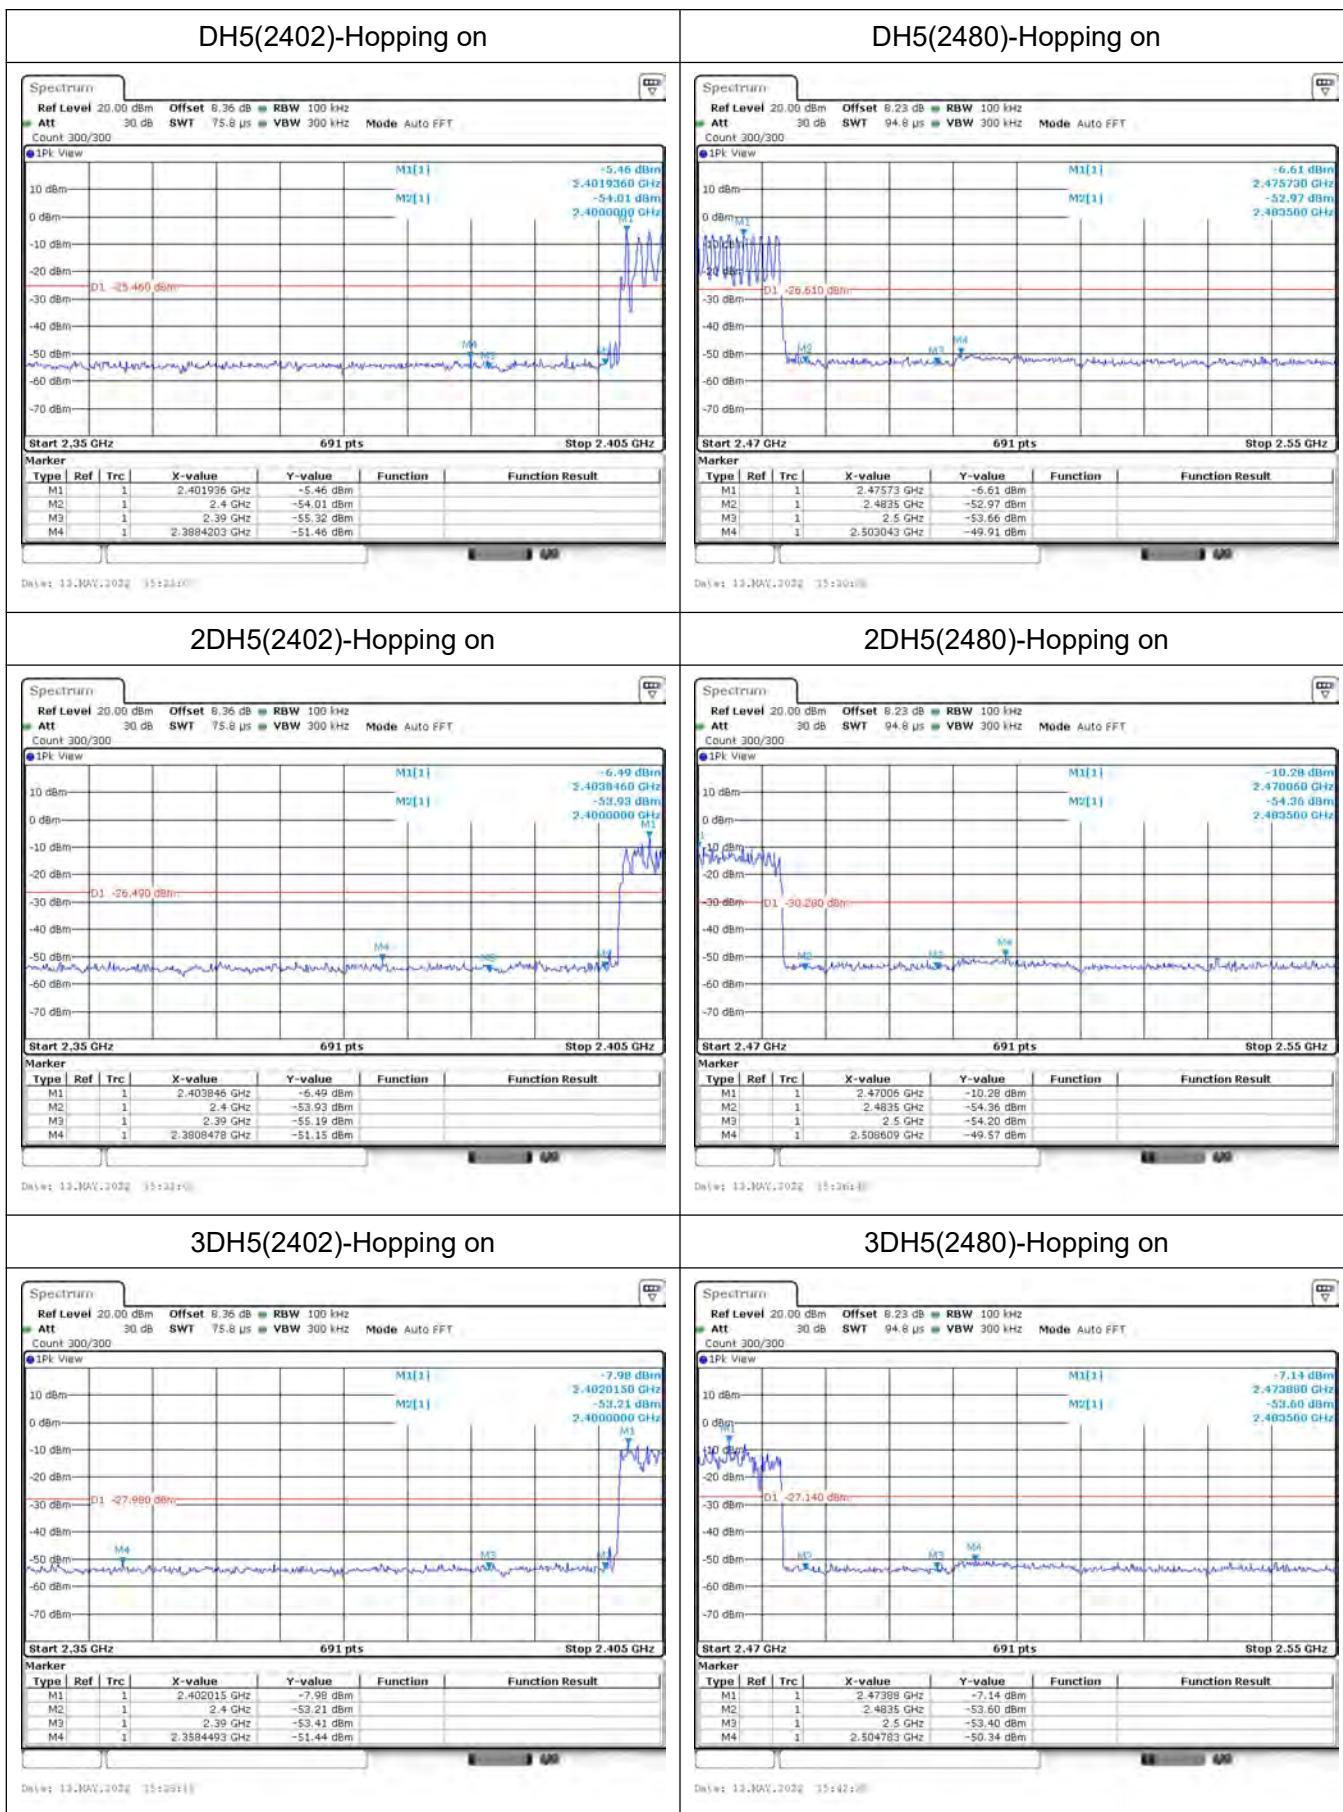

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com


3.8. Band Edge Emissions(Radiated)

Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

Test Configuration

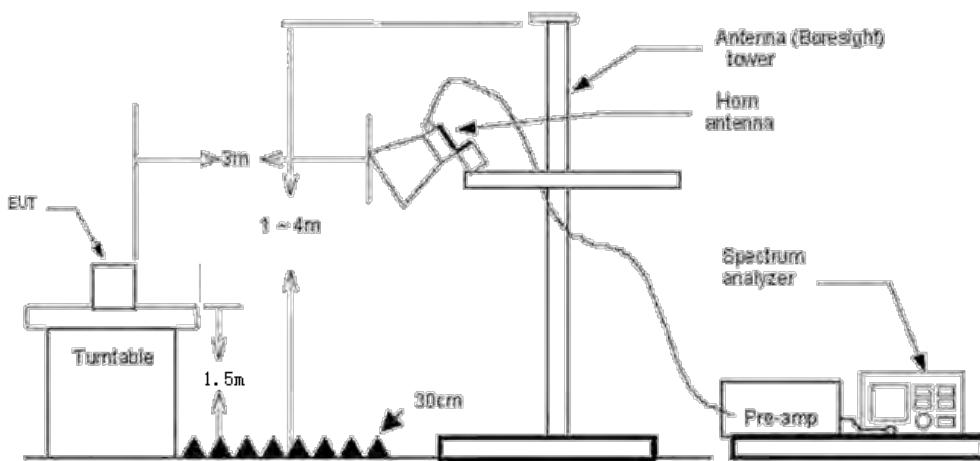

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2020 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.

Test Mode

Please refer to the clause 2.2.

Test Results

Note:

1. Measurement = Reading level + Correct Factor
2. Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
3. Pre-scan DH5, 2DH5 and 3DH5 modulation, and found the 3DH5 modulation which it is worse case, so only show the test data for worse case.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Frequency(MHz):		3DH5 2402		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2390.00	56.46	-10.92	45.54	74	28.46	PK
2390.00	42.67	-10.92	31.75	54	22.25	AV

Frequency(MHz):		3DH5 2402		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2390.00	56.63	-10.92	45.71	74	28.53	PK
2390.00	43.71	-10.92	32.79	54	21.45	AV

Frequency(MHz):		3DH5 2480		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2483.50	54.65	-10.88	43.77	74	30.23	PK
2483.50	44.40	-10.88	33.52	54	20.48	AV

Frequency(MHz):		3DH5 2480		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
2483.50	55.47	-10.88	44.59	74	29.41	PK
2483.50	43.51	-10.88	32.63	54	21.37	AV

3.9. Radiated Spurious Emissions

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)


Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration


Below 30MHz Test Setup

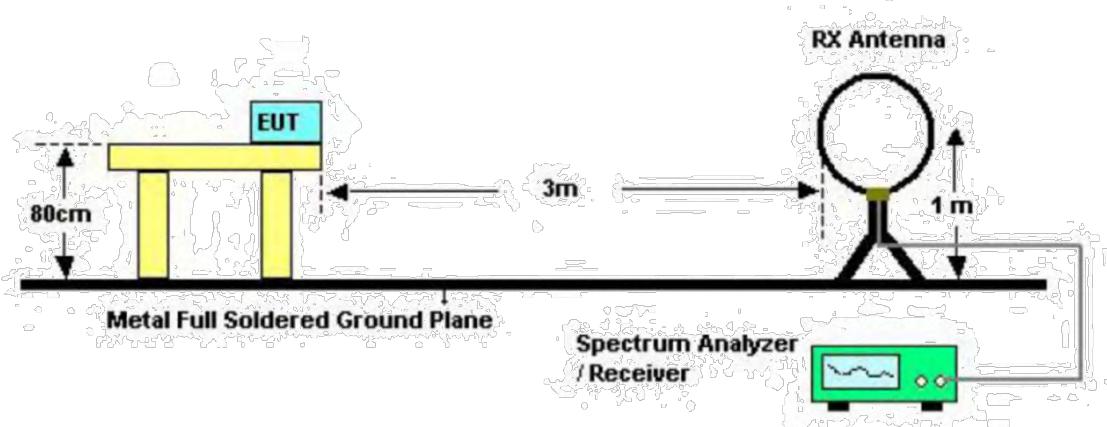


TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

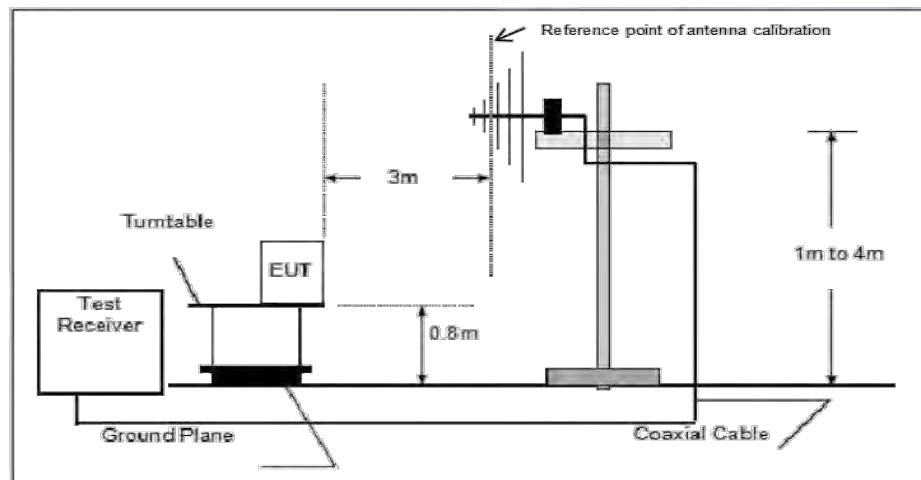

Below 1000MHz Test Setup

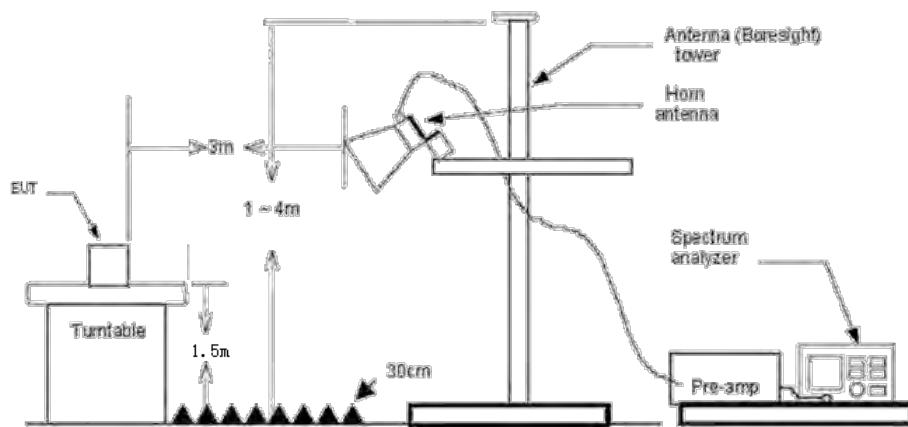

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz Peak detector for Peak value.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Test Mode

Please refer to the clause 2.2.

Test Result

9 KHz~30 MHz and 18GHz~25GHz

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS

Note:

- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan DH5, 2DH5 and 3DH5 modulation, found the 3DH5-CH00 Channel Below 1GHz and found the DH5 modulation which it is worse case for above 1GHz, so only show the test data for worse case.

RADIATED EMISSION BELOW 30MHZ


No emission found between lowest internal used/generated frequencies to 30MHz.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com


30MHz-1GHz

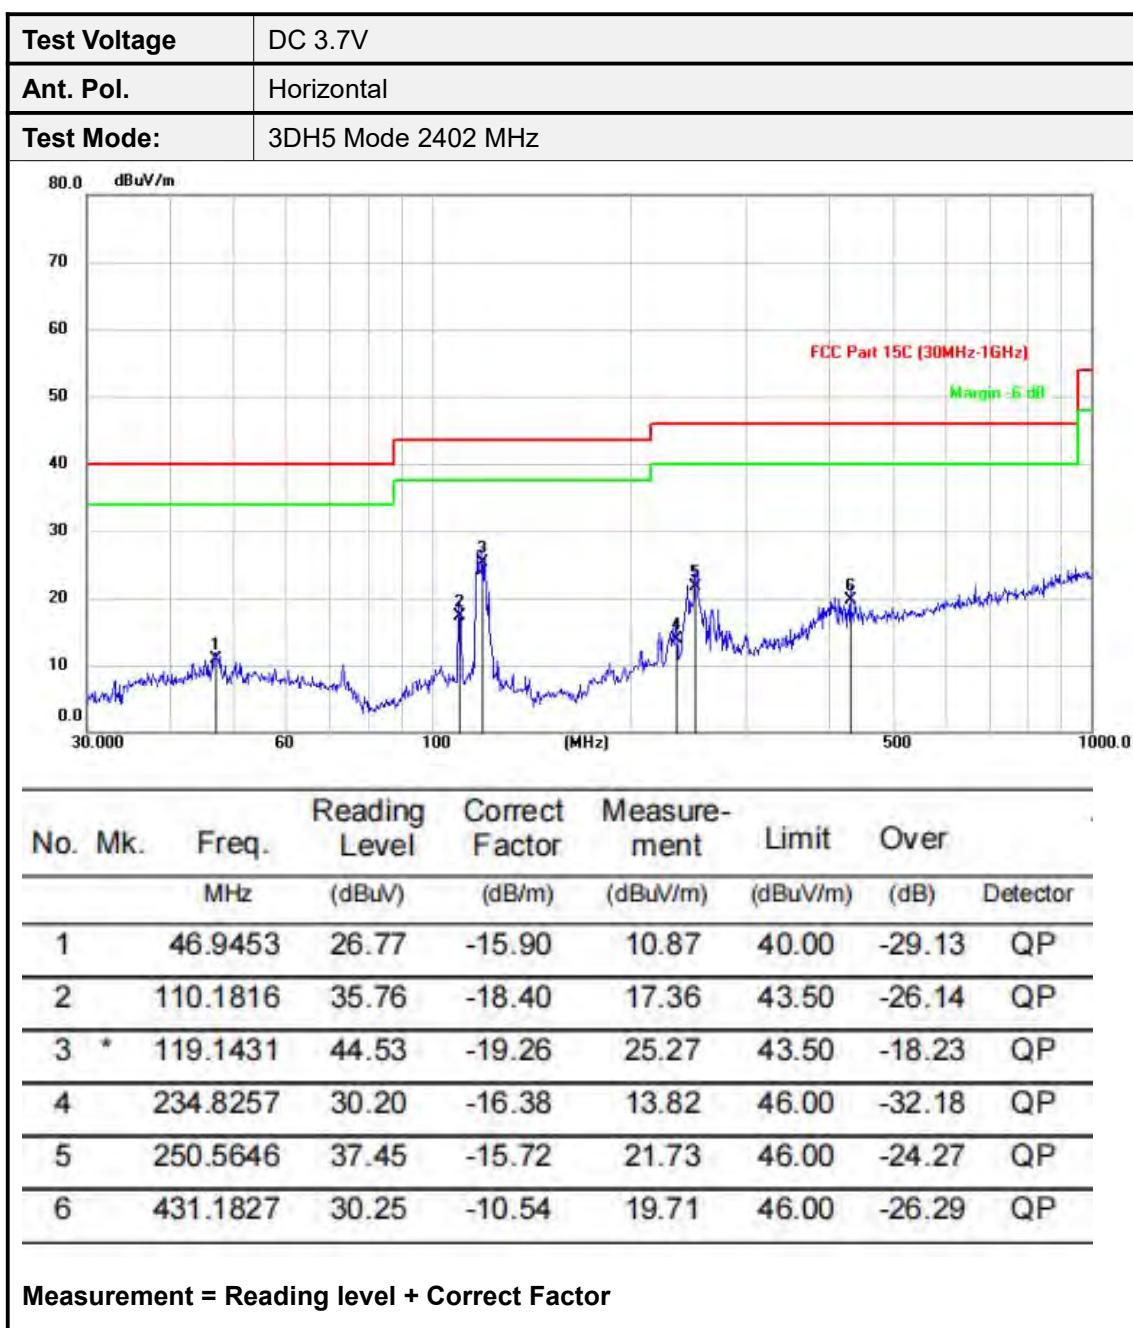

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

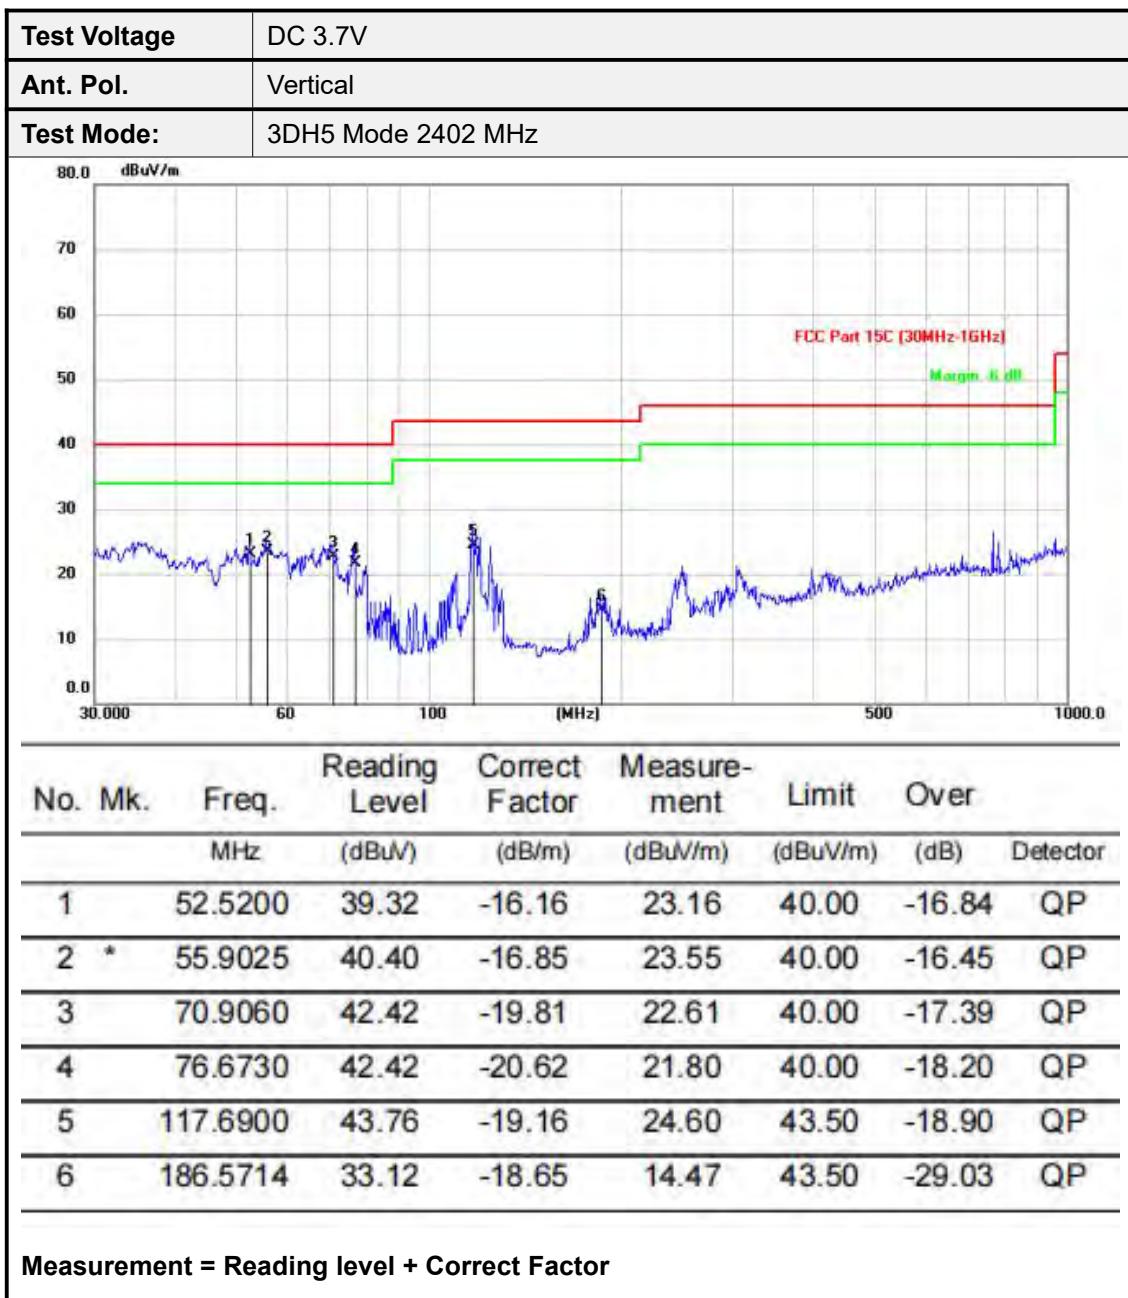

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Adobe 1GHz

Frequency(MHz):		3DH5 2402		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4804.00	56.57	-5.92	50.65	74	23.35	PK
4804.00	43.48	-5.92	37.56	54	16.44	AV
7206.00	52.98	-1.81	51.17	74	22.83	PK
7206.00	44.55	-1.81	42.74	54	11.26	AV

Frequency(MHz):		3DH5 2402		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4804.00	56.57	-5.92	50.65	74	23.35	PK
4804.00	43.45	-5.92	37.53	54	16.47	AV
7206.00	53.11	-1.81	51.30	74	22.70	PK
7206.00	44.66	-1.81	42.85	54	11.15	AV

Frequency(MHz):		3DH5 2441		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4882.00	54.00	-5.71	48.29	74	25.71	PK
4882.00	43.69	-5.71	37.98	54	16.02	AV
7323.00	53.93	-0.36	53.57	74	20.43	PK
7323.00	43.76	-0.36	43.40	54	10.60	AV

Frequency(MHz):		3DH5 2441		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4882.00	54.76	-5.71	49.05	74	24.95	PK
4882.00	44.80	-5.71	39.09	54	14.91	AV
7323.00	53.73	-0.36	53.37	74	20.63	PK
7323.00	43.60	-0.36	43.24	54	10.76	AV

Frequency(MHz):		3DH5 2480		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4960.00	54.01	-5.51	48.50	74	25.50	PK
4960.00	43.70	-5.51	38.19	54	15.81	AV
7440.00	53.90	0.99	54.89	74	19.11	PK
7440.00	43.85	0.99	44.84	54	9.16	AV

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Frequency(MHz):		3DH5 2480		Polarity:		VERTICAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
4804.00	54.02	-5.51	48.51	74	25.49	PK
4804.00	44.76	-5.51	39.25	54	14.75	AV
7206.00	53.82	0.99	54.81	74	19.19	PK
7206.00	43.83	0.99	44.82	54	9.18	AV

Note:

All test modes had been tested. The 8DPSK(3DH5) modulation is the worst case and recorded in the report.

3.10. Conducted Emission

Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

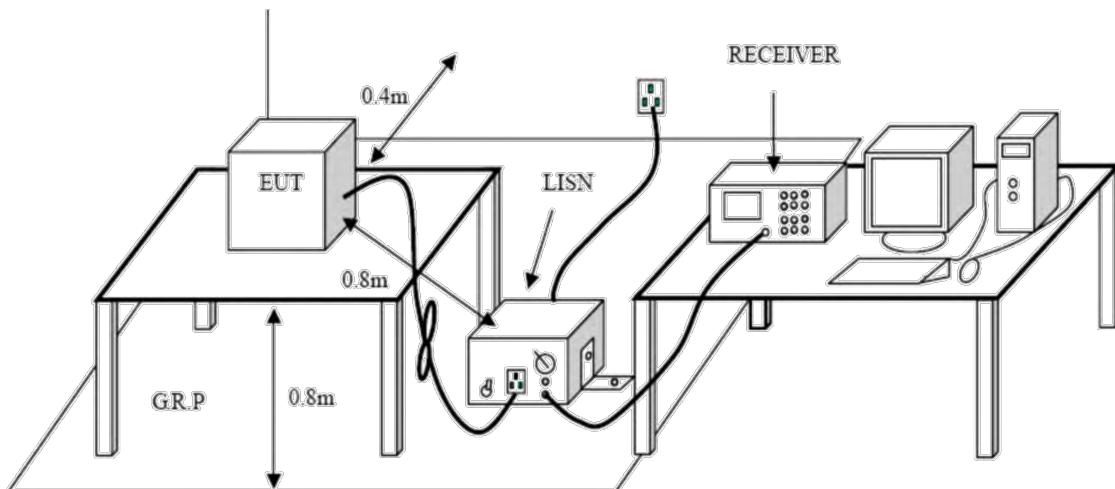

Test Procedure

1. The EUT was setup according to ANSI C63.10:2020 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:

Please refer to the clause 2.2


TRF No. FCC Part 15.247 R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@qdksign.cn Web: www.qdksign.com

Test Results


Pre-scan DH5, 2DH5,3DH5 modulation, and found the DH5 modulation 2402MHz which it is worse case, so only show the test data for worse case.

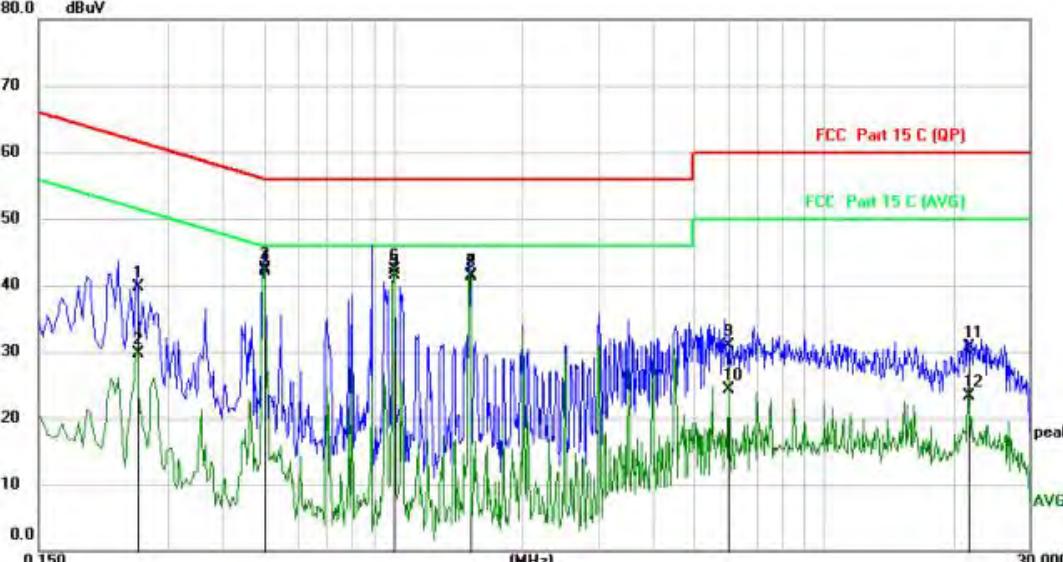Test Voltage:	AC 120V/60Hz						
Terminal:	Line						
80.0 dBuV							
No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	0.2540	28.70	10.95	39.65	61.63	-21.98	QP
2	0.2540	18.75	10.95	29.70	51.63	-21.93	AVG
3	0.5020	31.58	10.94	42.52	56.00	-13.48	QP
4	0.5020	31.25	10.94	42.19	46.00	-3.81	AVG
5	1.0020	30.51	11.08	41.59	56.00	-14.41	QP
6 *	1.0020	31.18	11.08	42.26	46.00	-3.74	AVG
7	1.5060	30.40	11.09	41.49	56.00	-14.51	QP
8	1.5060	30.24	11.09	41.33	46.00	-4.67	AVG
9	6.0179	19.80	11.16	30.96	60.00	-29.04	QP
10	6.0179	13.13	11.16	24.29	50.00	-25.71	AVG
11	21.6618	19.26	11.48	30.74	60.00	-29.26	QP
12	21.6618	11.89	11.48	23.37	50.00	-26.63	AVG
Remarks:							
1.Measurement = Reading Level+ Correct Factor							
2.Over = Measurement -Limit							

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

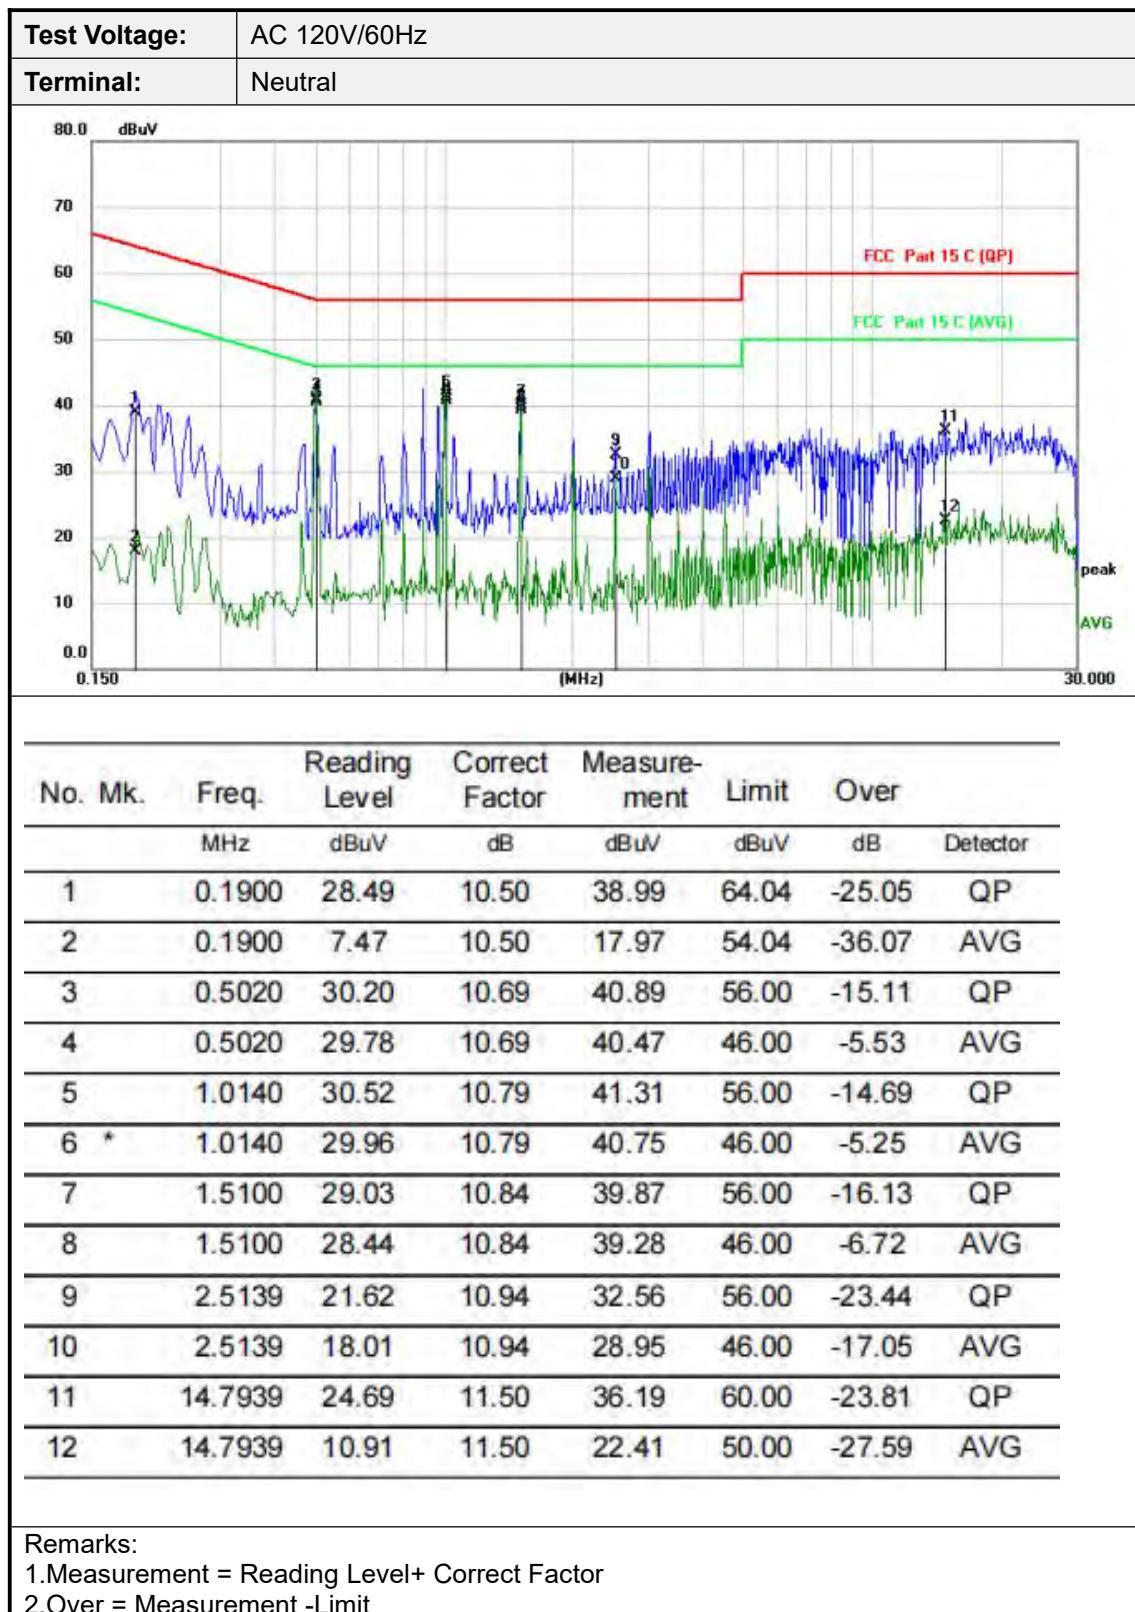

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

3.11. Pseudorandom Frequency Hopping Sequence

LIMIT


FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

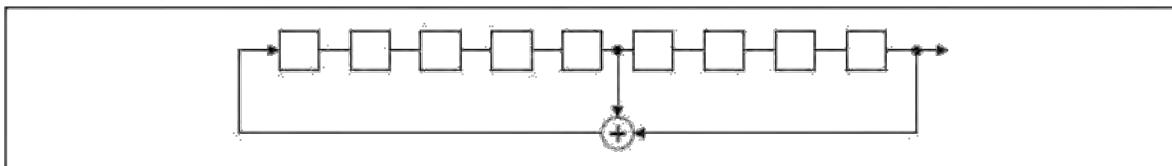

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

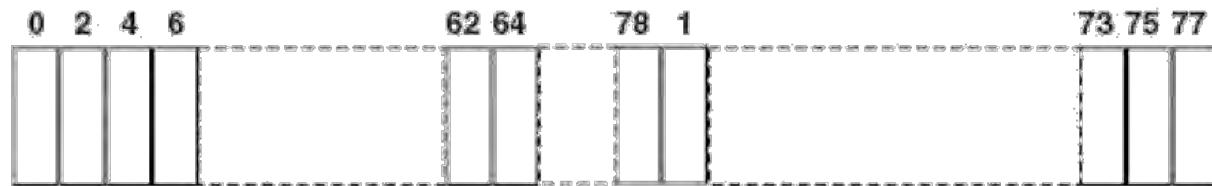

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

4. EUT TEST PHOTOS

Radiated Measurement (Below 1GHz)



Radiated Measurement (Above 1GHz)



TRF No. FCC Part 15.247_R1


Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Conducted Emission



RF Conducted

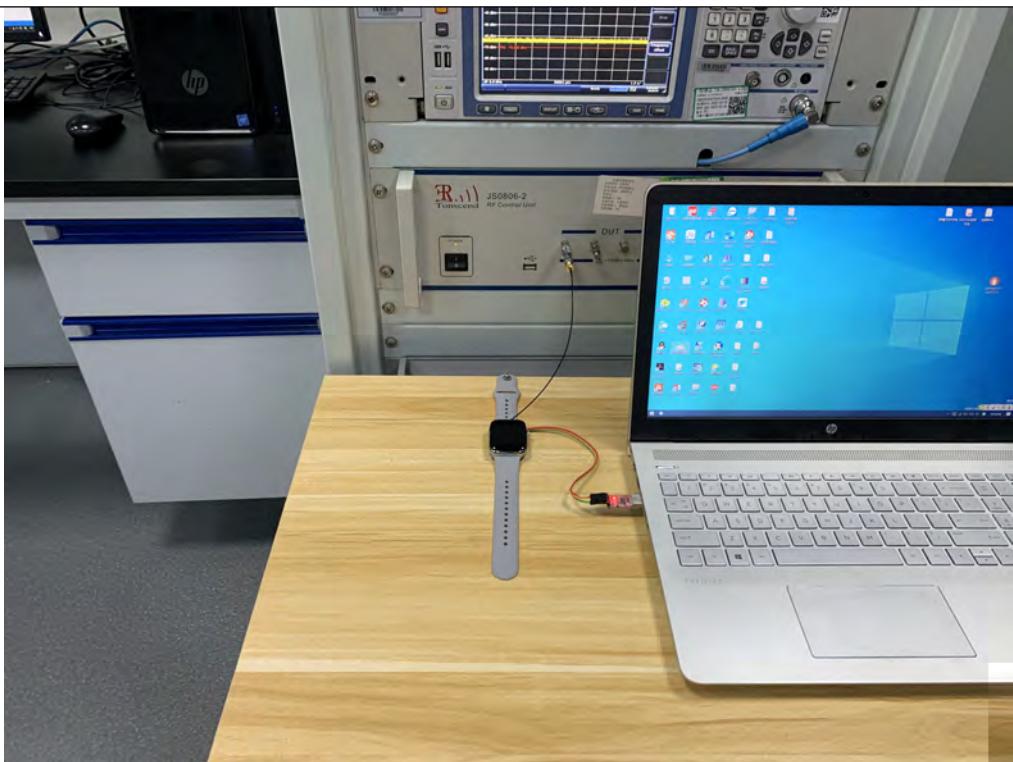

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

External Photographs

Photo 1 for T2



Photo 2 for T2



TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 3 for T2

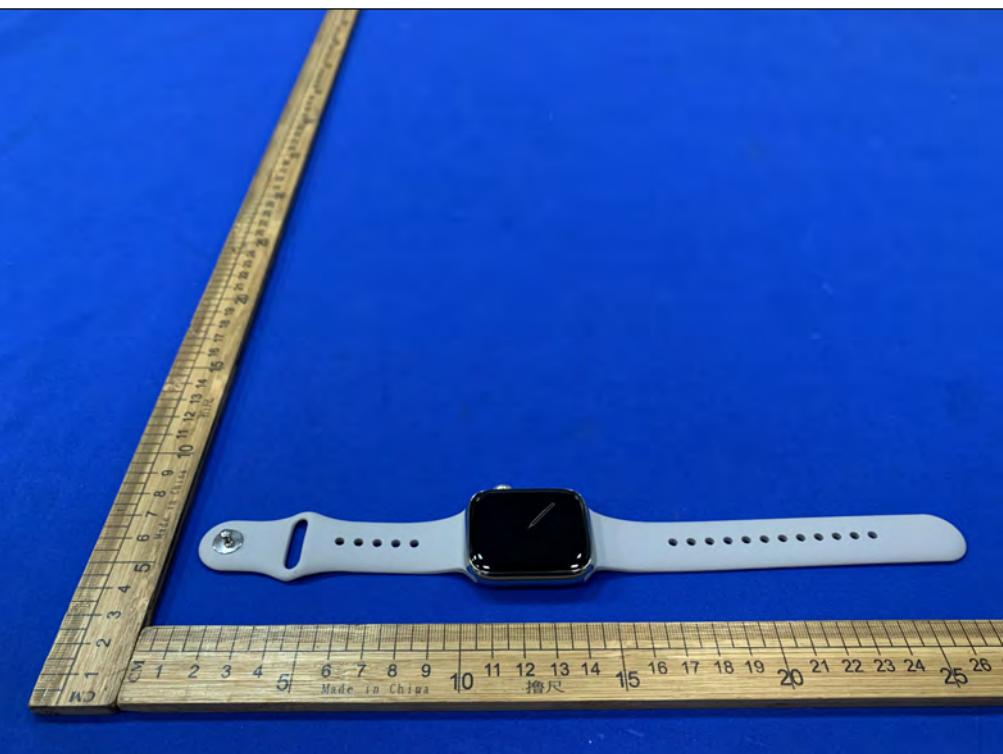


Photo 4 for T2



TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 5 for T2



Photo 6 for T2



TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 7 for T3



TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Internal Photographs

Photo 1 for T2



Photo 2 for T2

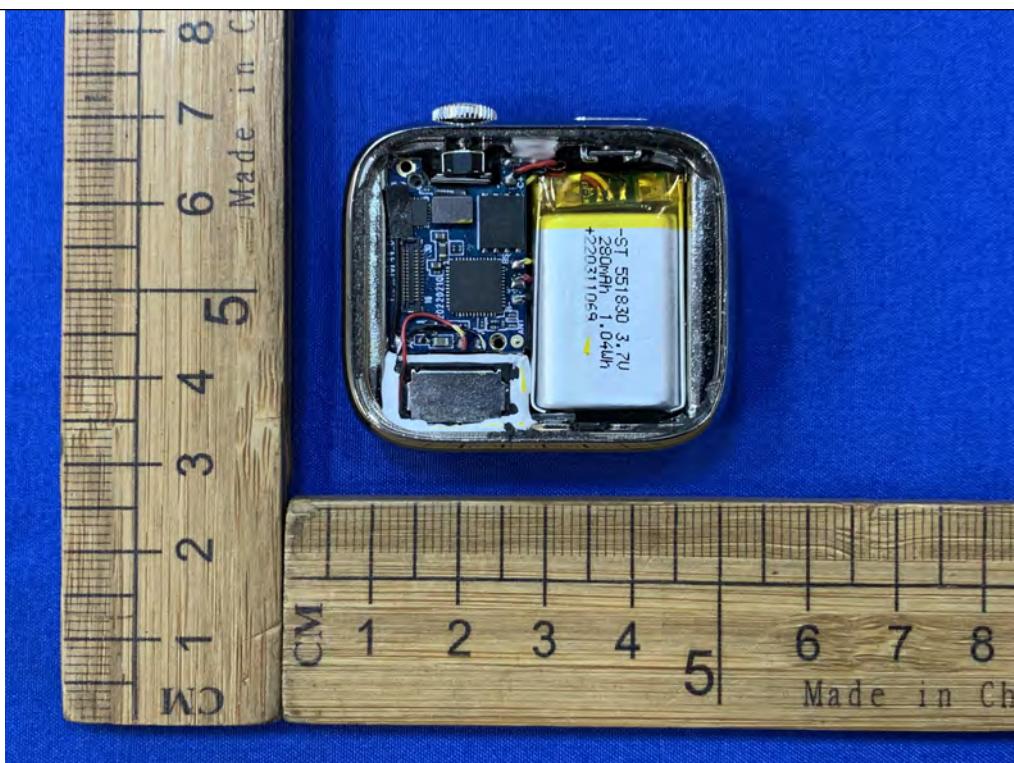

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 3 for T2


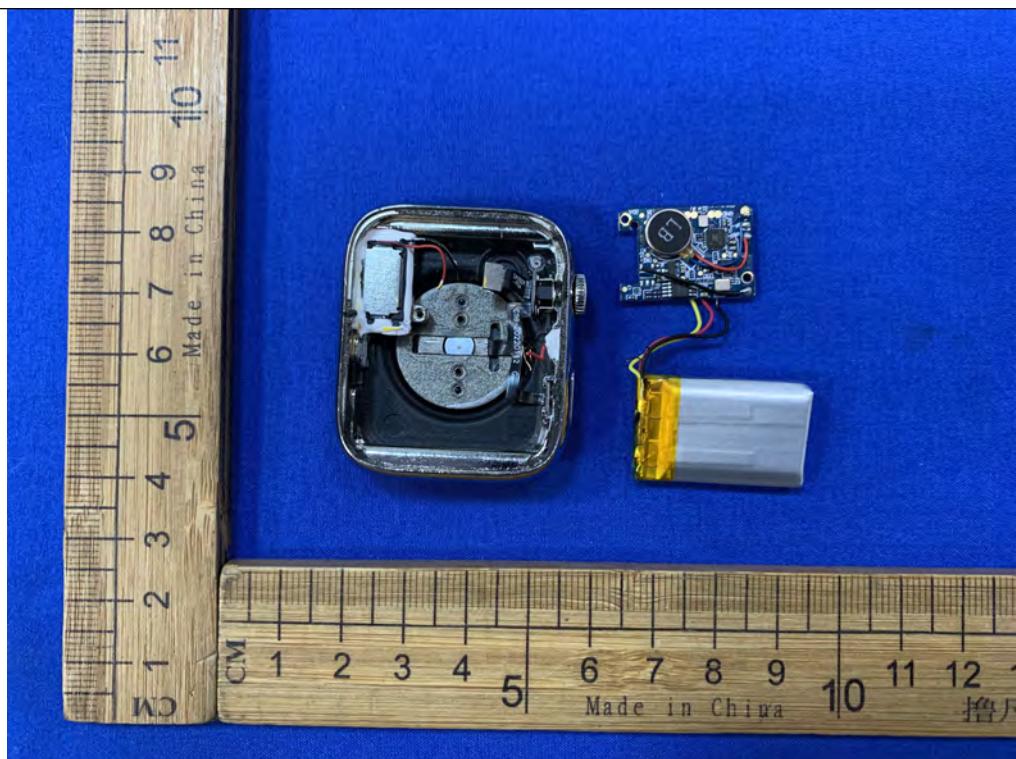


Photo 4 for T2

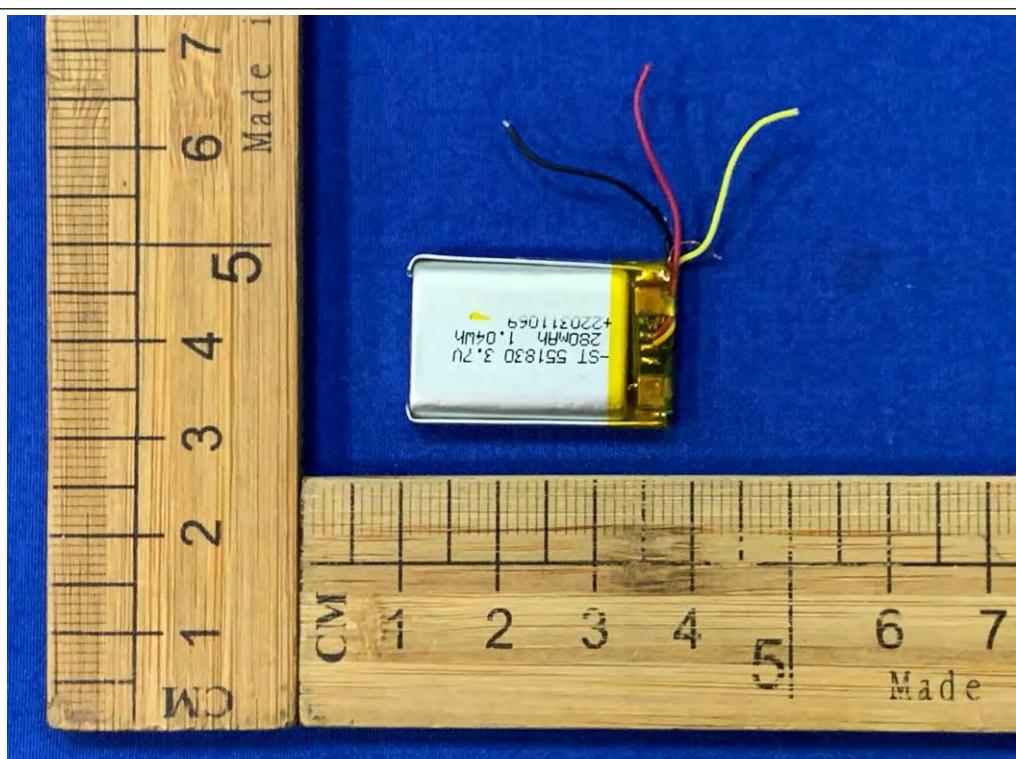

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 5 for T2


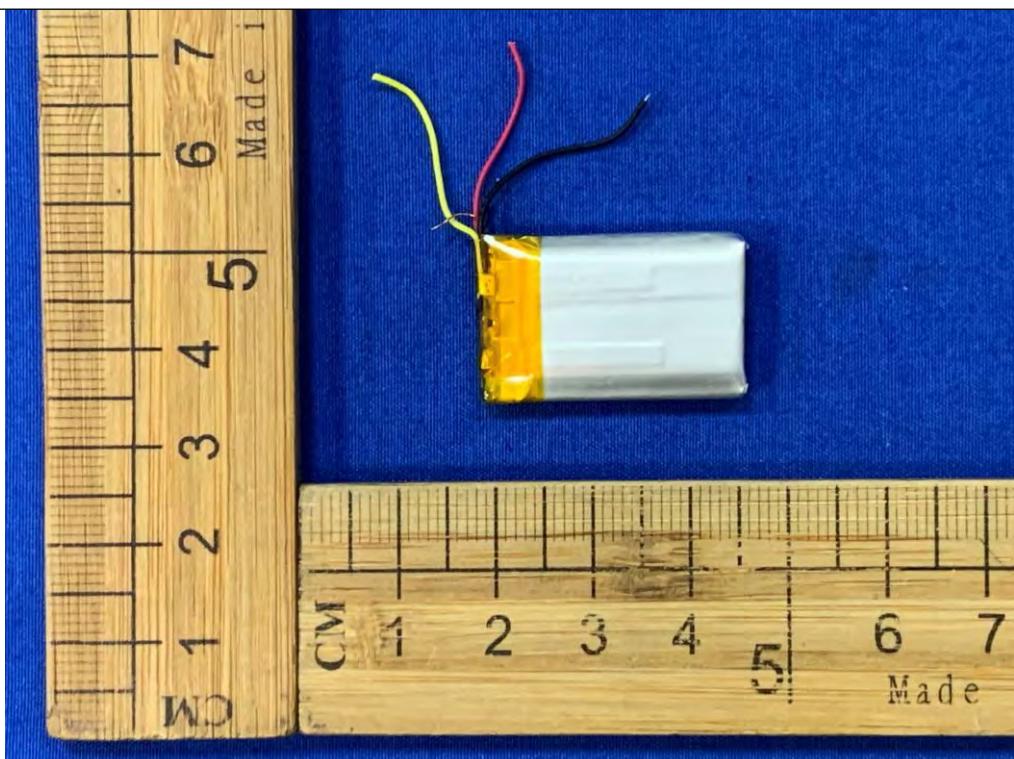


Photo 6 for T2

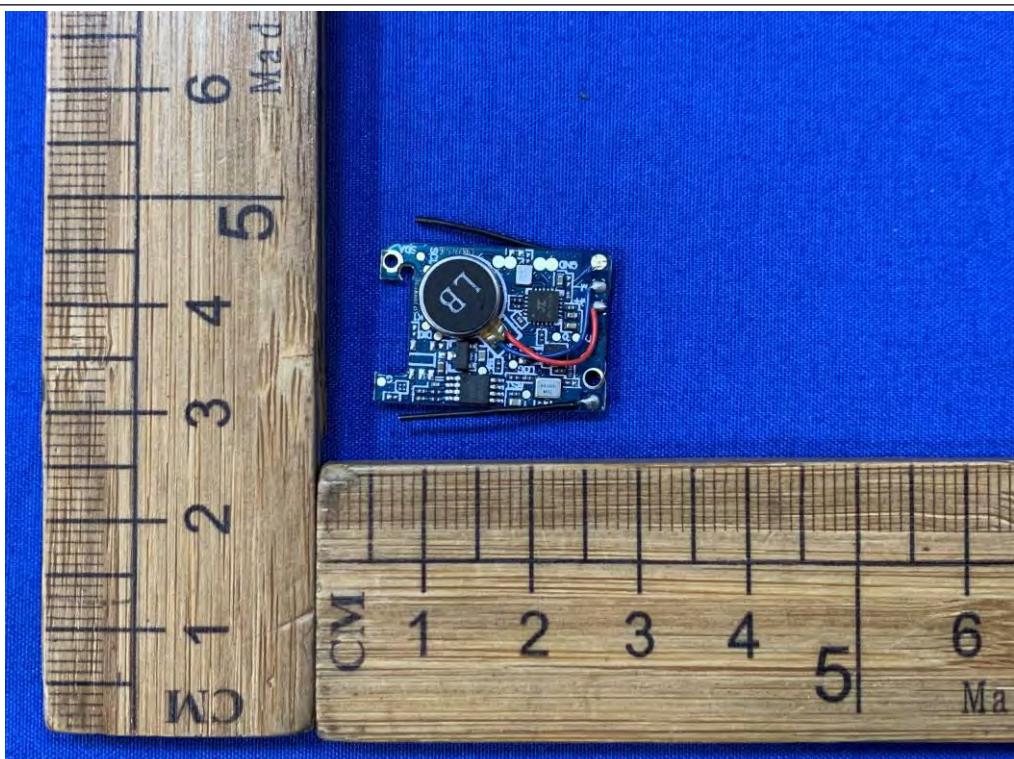

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 7 for T2


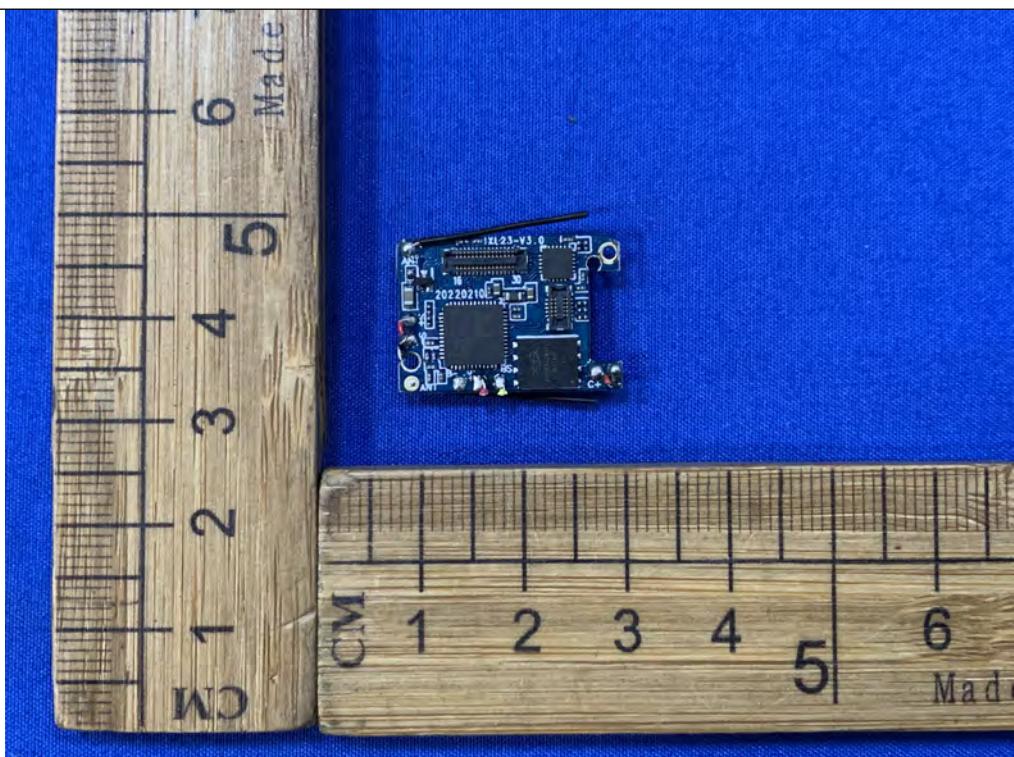


Photo 8 for T3

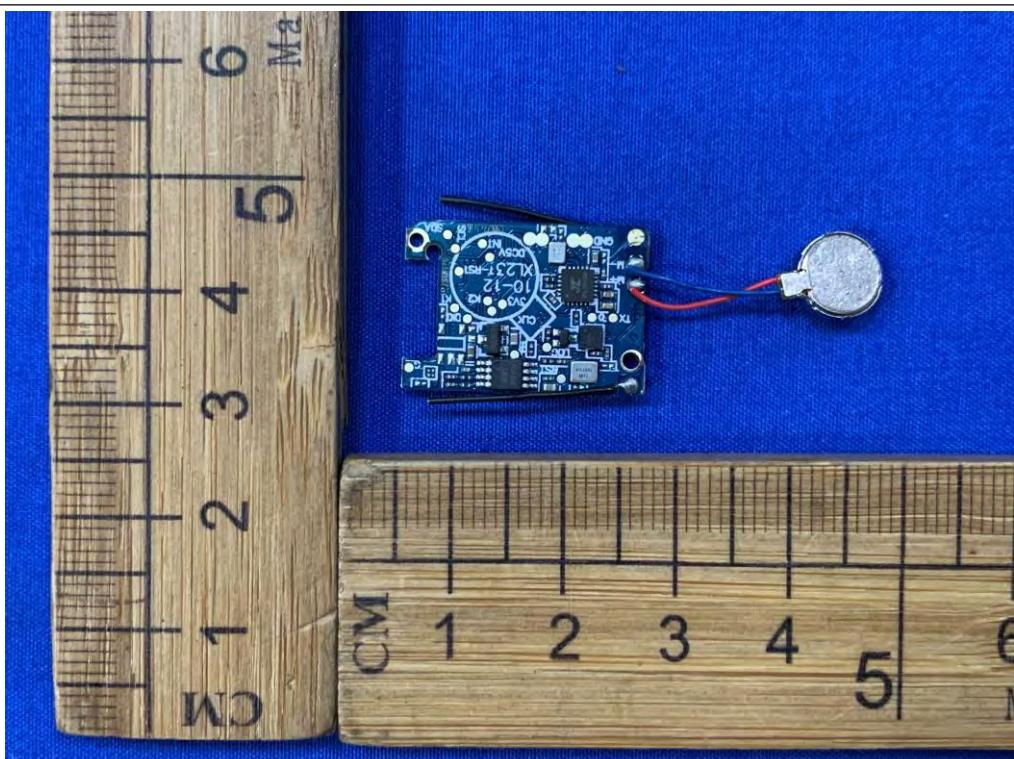

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 9 for T3


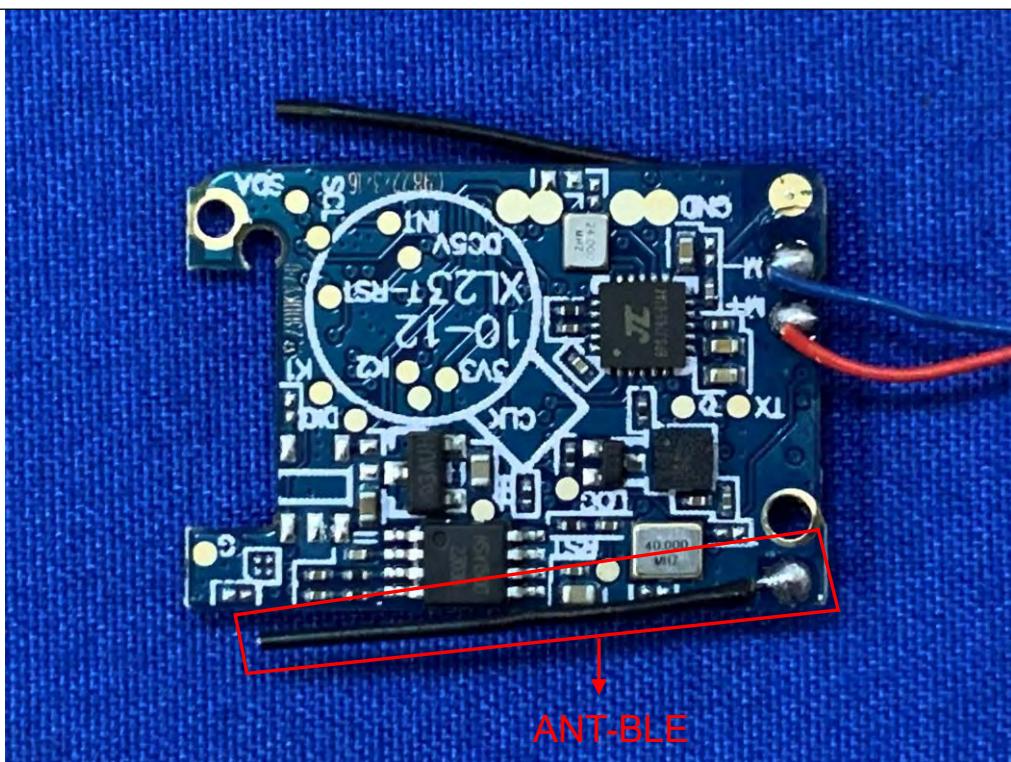


Photo 10 for T3

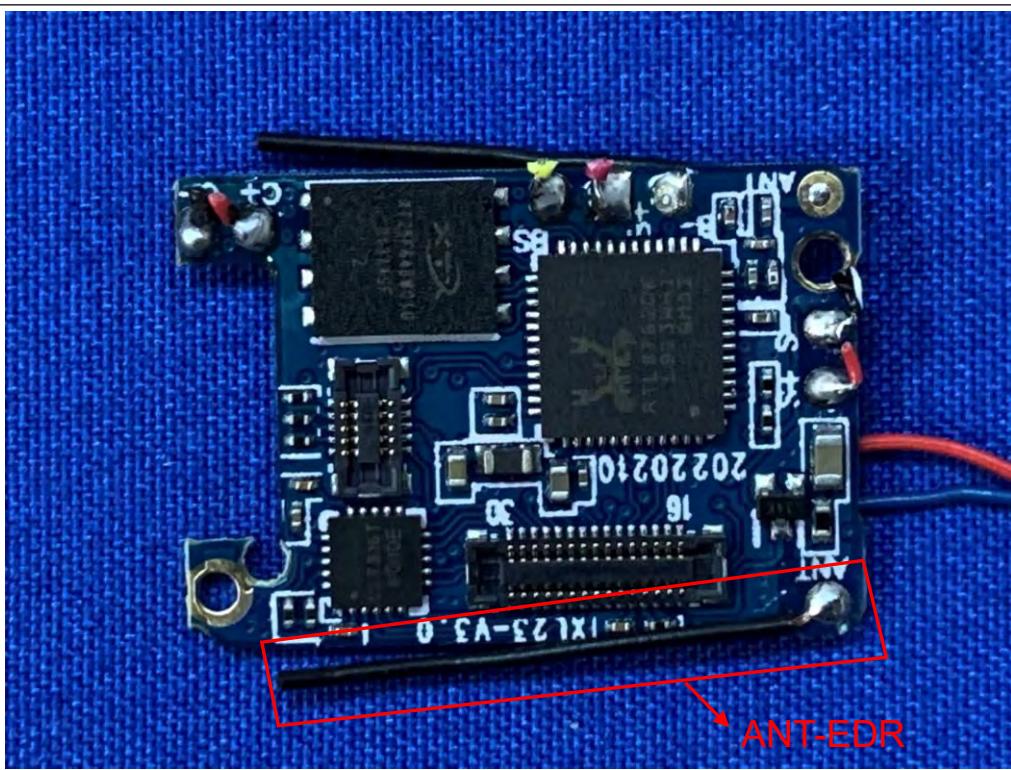

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 11 for T3


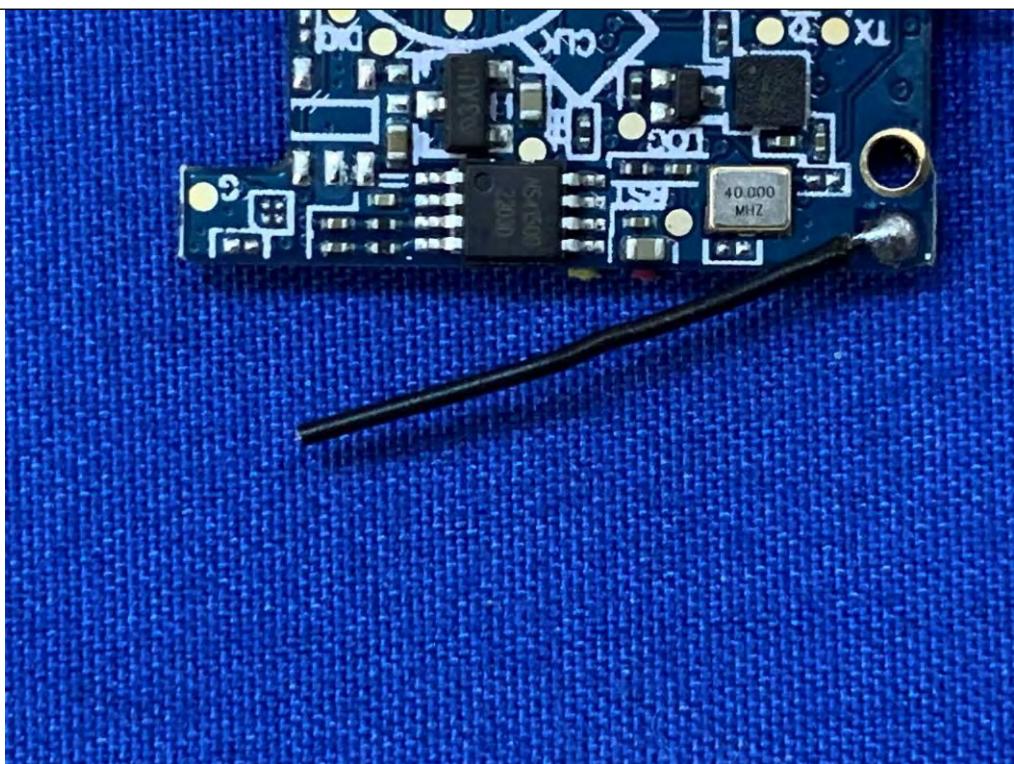


Photo 12 for T3

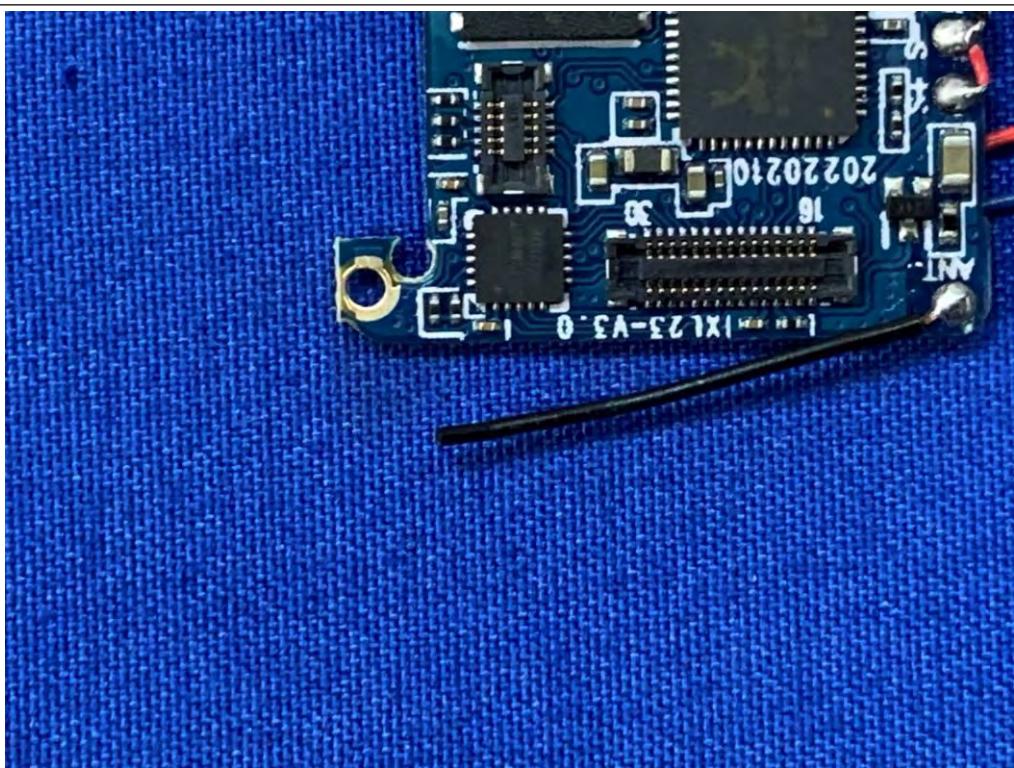

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 13for T3


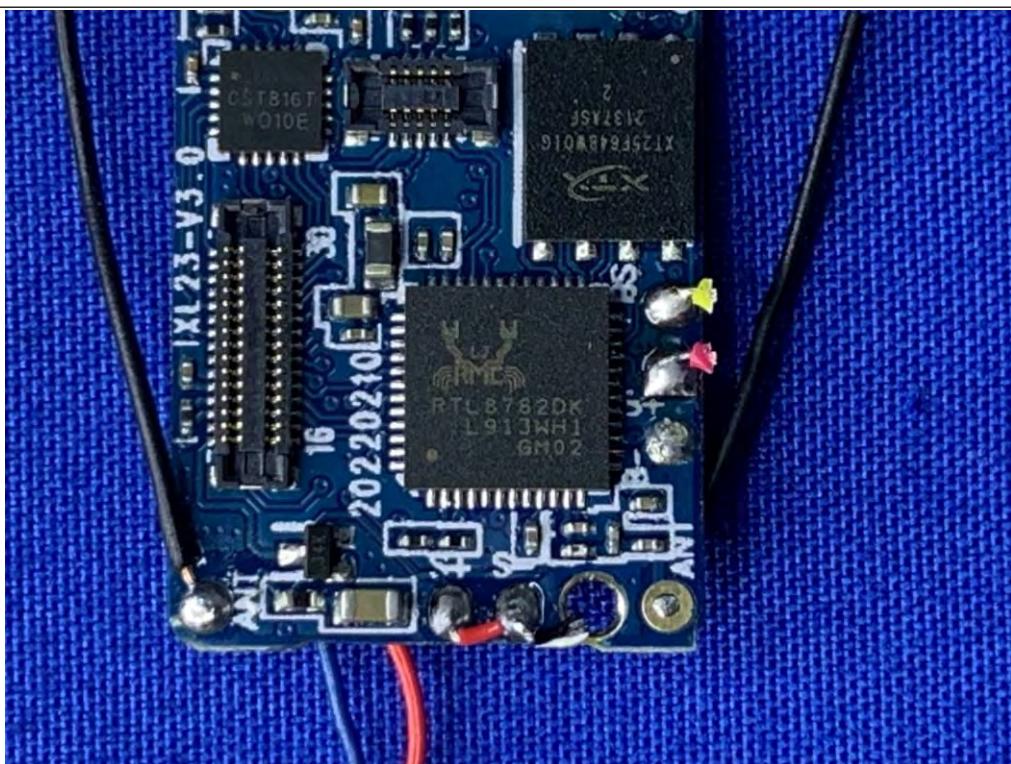


Photo 14for T3

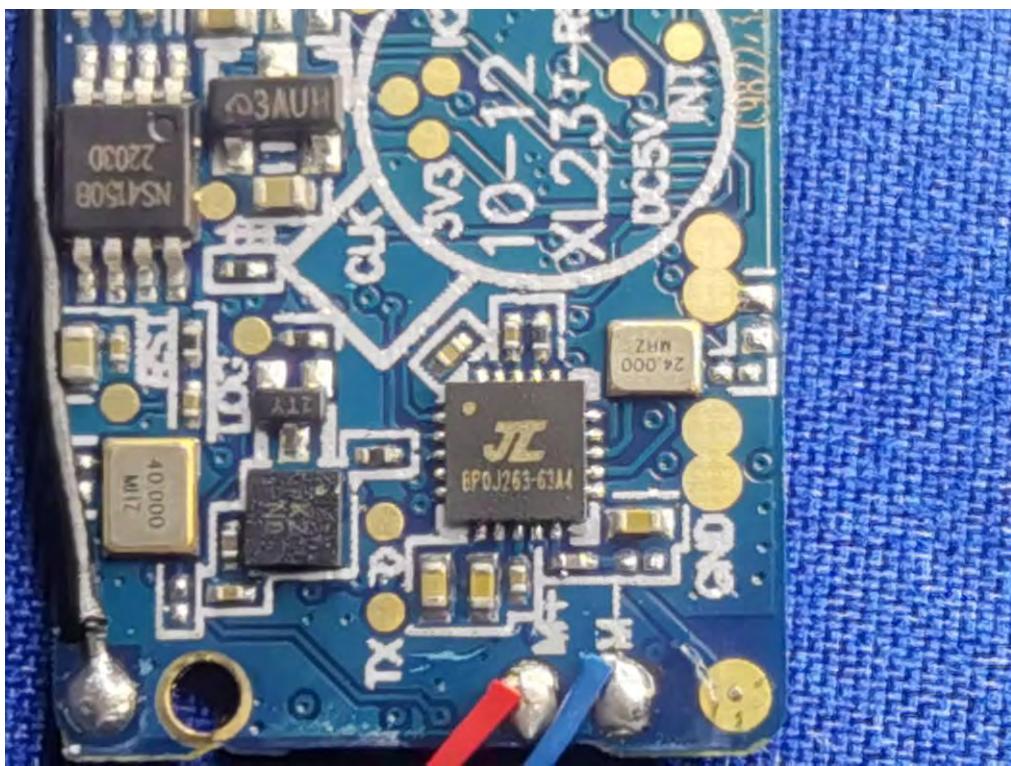

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com

Photo 15for T3



Photo 16for T3



--THE END--

TRF No. FCC Part 15.247_R1

Add : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel :+(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail :info@gdksign.cn Web: www.gdksign.com