



MOTOROLA PENANG ADV. COMM. LABORATORY

Motorola Solutions Malaysia Sdn Bhd
Innoplex Plot 2A, Medan Bayan Lepas,
Mukim 12 S.W.D, 11900 Bayan Lepas,
Penang, Malaysia.

FCC / IC TEST REPORT

Report Revision : Rev. B

Date/s Tested : 7-AUG-2017 - 14-AUG-2017
Report Issue Date : 15-NOV-2017
Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd
Requestor : HENG TUCK CHANG
Product Type : Mobile
Model Number : AAM28QNN9R1AN
Frequency Band : 403 MHz-470 MHz
Low / Max RF Output Power : 1 Watts / 30 Watts
Applicant Name : Motorola Solutions Malaysia Sdn Bhd
Applicant Address : Innoplex Plot 2A, Medan Bayan Lepas,
Mukim 12 S.W.D, 11900 Bayan Lepas,
Penang, Malaysia
FCC Registrations : 772092
IC Registrations : 109AK
FCC Test Firm Registration : 461337



The equipment was tested accordance to the requirement listed below:

(LMR)
FCC 47 CFR Part 22 / 74 / 80 / 90
IC RSS-119 **PASS**

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

Prepared By:

Approved By:

Song Zhi Wei
Test Personnel

Vincent Foong
Responsible Engineer

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	5
4.0 Equipment List.....	6
5.0 Test Condition.....	8
5.1. Transmitter Test Conditions	8
6.0 Transmitter Test Parameters	9
6.1. RF Output Power	9
6.1.1. Test Setup.....	9
6.1.2. Test Result	9
6.2. Frequency Stability	10
6.2.1. Test Setup.....	10
6.2.2. Test Result	11
6.2.3. Test Limit.....	12
6.3. Audio Frequency Response	13
6.3.1. Test Setup.....	13
6.3.2. Test Result	13
6.3.3. Test Limit.....	14
6.4. Audio Low Pass Filter Response	15
6.4.1. Test Setup.....	15
6.4.2. Test Result	15
6.4.3. Test Limit.....	16
6.5. Modulation Limiting	18
6.5.1. Test Setup.....	18
6.5.2. Test Result	18
6.5.3. Test Limit.....	18
6.6. Occupied Bandwidth.....	19
6.6.1. Test Setup (Analog)	19
6.6.2. Test Result (Analog).....	20
6.6.3. Test Setup (Digital).....	24
6.6.4. Test Result (Digital).....	25
6.6.5. Test Limit.....	29
6.7. Band Edge Conducted Spurious Emission (Part 22)	30
6.7.1. Test Setup (Analog)	30
6.7.2. Test Result (Analog).....	31
6.7.3. Test Setup (Digital).....	32
6.7.4. Test Result (Digital).....	33
6.7.5. Test Limit.....	33

6.8. Transient Frequency Behavior 34
 6.8.1. Test Setup..... 34
 6.8.2. Test Result 35
 6.8.3. Test Limit..... 37
 6.9. Adjacent Channel Power..... 38
 6.9.1. Test Setup (Analog) 38
 6.9.2. Test Result 38
 6.9.3. Test Setup (Digital)..... 39
 6.9.4. Test Result 39
 6.9.5. Test Limit..... 40
 6.10. Conducted Spurious Emission 42
 6.10.1. Test Setup..... 42
 6.10.2. Test Result (Analog) 43
 6.10.3. Test Result (Digital)..... 55
 6.10.4. Test Limit..... 66
 6.11. Radiated Spurious Emission 67
 6.11.1. Test Setup..... 67
 6.11.2. Test Result (Analog) 68
 6.11.3. Test Result (Digital)..... 75
 6.11.4. Test Limit..... 82
 6.12. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)..... 83
 6.12.1. Test Setup..... 83
 6.12.2. Test Result 83
 6.12.3. Test Limit..... 84
 6.13. AC Power Line Conducted Spur Emissions 85
 6.13.1. Test Setup..... 85
 6.13.2. Test Result 85
 6.13.3. Test Limit..... 86

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	11-OCT-2017	Song Zhi Wei
Rev. B	Amended Part 74,Mask D to 100Hz RBW.	15-NOV-2017	Song Zhi Wei

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, Digital 4FSK

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI/TIA/-603-D
ANSI C63.4.2014
ANSI C63.26-2015

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	IC General Rules Part	Test Item	Result
2.1046, 90.22.565, 74.461, 74.534, 80.215	RSS-Gen, RSS-119	RF Power Output	PASS
2.1055, 90.213, 22.355, 74.464, 74.561	-	Frequency Stability	PASS
-	-	Audio Frequency Response	NA
-	-	Audio Low Pass Filter Response	NA
-	-	Modulation limiting	NA
2.1049, 90.210, 22.359, 74.462, 74.535, 80.211(c), 80.211(f)	RSS-Gen, RSS-119	Occupied Bandwidth	PASS
22.359(a),(b)	-	Band Edge Conducted Spurious Emission	PASS
90.214	-	Transient Frequency Behavior	PASS
-	-	Adjacent Channel Power	NA
2.1051, 90.543, 22.359, 74.462(c), 80.211(c)	RSS-Gen, RSS-119	Conducted Spurious Emissions	PASS
2.1051, 90.543, 22.359, 74.462(c), 80.211(c)	RSS-Gen, RSS-119	Radiated Spurious Emission	PASS
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA
-	-	Effective Radiated Power (ERP)	NA
-	-	AC Power Line Conducted Spurious Emission	NA

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

FCC Analog ATE#1: (SW Version: Analog ATE_Rev 2.4.3 & FCC_FreqStability_Rev 1.0.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audio Analyzer	8903B	3011A10475	02-May-17	02-May-18
SIGNAL GENERATOR	2042	203002/745	02-May-17	02-May-18
MODULATION ANALYZER	8901B	3216A03889	03-May-17	03-May-18
TRANSCEIVER INTERFACE	8954A	2234A00398	04-May-17	04-May-18
DSA	36570A	MY42506781	03-May-17	03-May-18
SIGNAL GENERATOR	E4425B	US39260201	02-May-17	02-May-18
SIGNAL GENERATOR	2042	203002/747	02-May-17	02-May-18
POWER SENSOR	E4412A	MY41502652	09-May-17	09-May-18
POWER METER	E4416A	GB41293855	09-May-17	09-May-18
POWER SUPPLY	6031A	3325A02771	03-May-17	28-Mar-18
CHAMBER	SH-641	92014678	04-Apr-17	04-Mar-18
RF TRANSCEIVER CONTROLLER	AX2007AI	NA	CNR	CNR

FCC Transient ATE #1: (SW Version: FCC Transient ATE_R 1.1.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6032A	2818A03549	11-May-17	11-May-18
POWER SENSOR	E4412A	MY41498918	09-May-17	09-May-18
POWER METER	E4416A	MY45101016	11-Jan-17	11-Jan-18
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY52300223	09-May-17	09-May-18
STEP ATTENUATOR/110dB	8496G	MY52300176	09-May-17	09-May-18
OSCILLOSCOPE	MSO8064A	MY45001903	25-May-17	25-May-18
AUDIO ANALYZER	8903B	3729A17409	02-May-17	02-May-18
AUDIO ANALYZER	8903B	3011A08952	02-May-17	02-May-18
MODULATION ANALYZER	8901B	3019A02766	04-Mar-17	04-Mar-18
SIGNAL GENERATOR	8657A	3323A05725	02-May-17	02-May-18
SPECTRUM ANALYZER	E4440A	MY46185415	24-May-17	24-May-19
SWITCH CONTROL UNIT	11713A	2508A10141	CNR	CNR

Conducted Spurious Emission ATE # 1: (SW Version: Conducted Spur ATE_rev 1.23.0)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
SPECTRUM ANALYZER	E4440A	US45303111	16-Feb-17	16-Feb-18
POWER SUPPLY	6032A	MY41002067	5-May-17	5-May-18
HIGH PASS FILTER SWITCH BOX	-	CS001	7-Apr-17	7-Apr-18
MICROWAVE GENERATOR	SMP 02	830682/015	19-Oct-16	19-Oct-17
MODULATION ANALYZER	8901B	3438A05278	3-Mar-17	3-Mar-18

Radiated Emission Station: (SW Version: EMC_FCC_IC_BT_RE_V 1.5.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	566	04-Sep-16	04-Sep-17
DRG HORN FREQ.	SAS-571	720	02-Mar-17	02-Mar-19
POWER SUPPLY	6674A	3126A00133	12-Nov-15	12-Nov-17
MICROWAVE SIGNAL GENERATOR	SMP04	100127	19-Jul-17	18-Jul-18
EMI TEST RECEIVER	ESIB26	100336	13-Jul-17	12-Jul-18
SIGNAL ANALYZER	FSV40	101103	18-Jul-17	17-Jul-18
5m Semi-anechoic Chamber	S800-HX	J2308	CNR	CNR
BILOG ANTENNA	CBL6112B	2950	23-Feb-16	23-Feb-18
BILOG ANTENNA	CBL6112B	2964	03-Feb-17	03-Feb-18
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	14-Oct-16	14-Oct-17
DATA LOGGER	SDL500	A.016776	18-Mar-17	18-Mar-18
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	CNR	CNR
PREAMPLIFIER	PAM-0118P	361	CNR	CNR
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			

CNR → Calibration Not Required

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Temperature (°C)	Voltage Supply (V)	Power (W)	Modulation	Test Frequency (MHz)
RF Output Power	25°C	Nominal	Low / Max	Analog	406.2,450.65,459.125, 467.775
Frequency Stability	-30°C ~ 60°C	80% ~ 120% of Nominal Volt	Max	Analog	467.775
Audio Frequency Response (12.5kHz / 25kHz)	25°C	Nominal	Max	N/A	N/A
Audio Low Pass Filter Response (12.5kHz / 25kHz)	25°C	Nominal	Max	N/A	N/A
Modulation limiting (12.5kHz / 25kHz)	25°C	Nominal	Max	N/A	N/A
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	406.2,450.65,459.125, 467.775
Band Edge Conducted Spurious Emission (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	459.025,459.65
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	467.775
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Conducted Spurious Emissions (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	406.2,450.65,459.025, 459.125,459.65, 467.775
Radiated Spurious Emission (12.5kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	406.2,450.65,459.025, 459.125,459.65, 467.775
GNSS (700MHz Band) (EIRP for 1559-1610MHz) (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Effective Radiated Power (ERP) (700MHz & 900MHz Band) (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
AC Power Line Conducted Spurious Emissions* (12.5kHz)	25°C	Nominal	Max	NA	NA

* – ONLY tested if portables can be operated during charging OR mobiles can be used in desktop operation connected to a power supply **NA → Not Applicable**

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

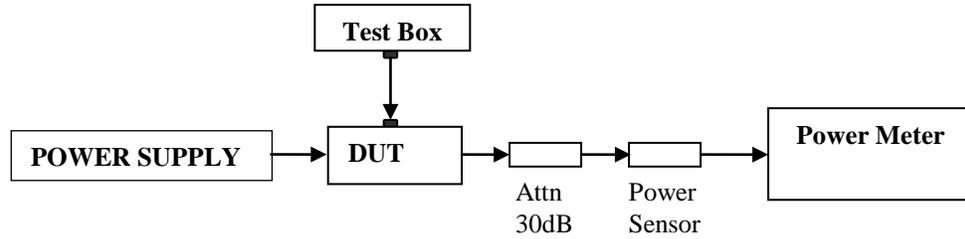


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C			
Voltage (V)	13.2 V			
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)
406.2	1.00	1.60	29.10	5.24
450.65	1.01	1.68	29.80	5.53
459.125	0.98	1.66	28.80	5.61
467.775	1.03	1.66	28.80	5.55

6.2. Frequency Stability

6.2.1. Test Setup

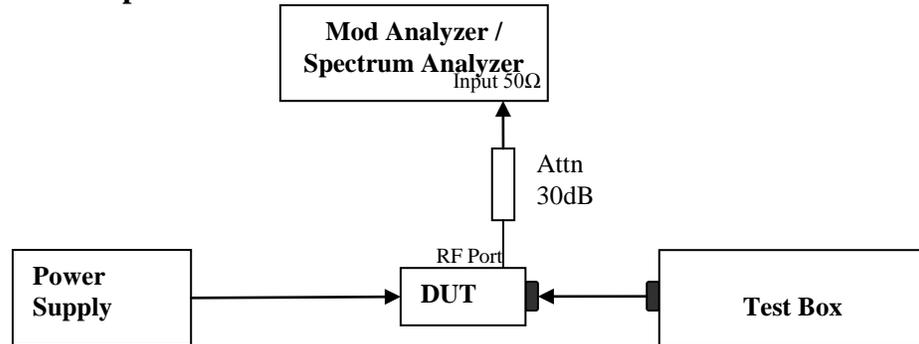


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions: Different Temperature & Supply Voltage input.
 - Temperature: Vary voltage per test condition in Clause 5.1
 - Supply Voltage: Vary temperature per test condition in Clause 5.1
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result


Frequency : 467.7750 MHz
 Channel Spacing : 12.50 kHz

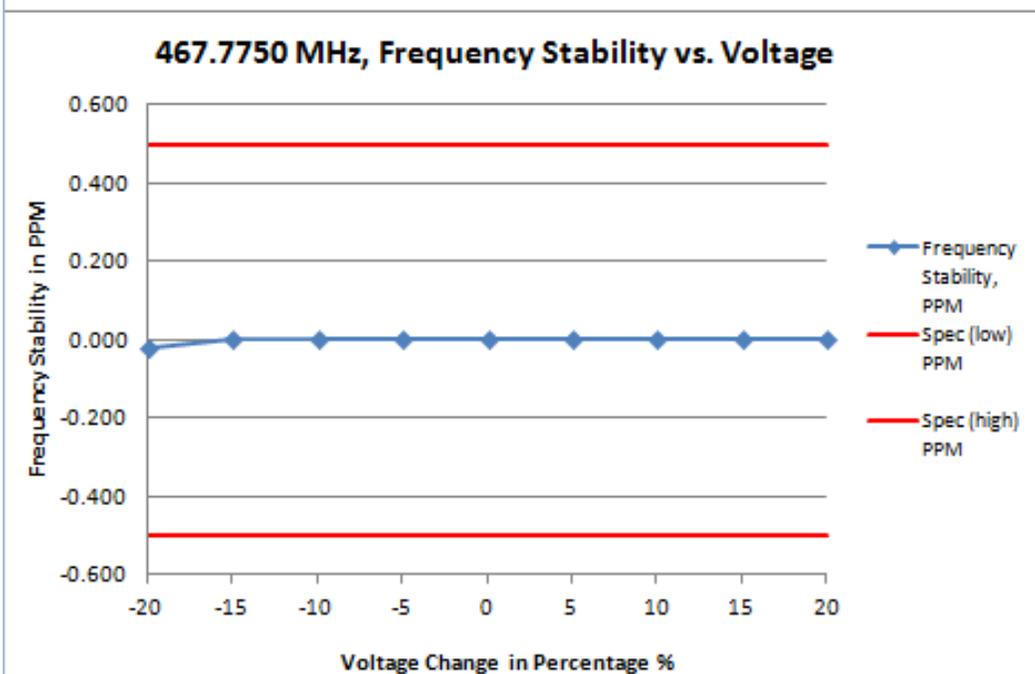

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing		467.7750 MHz / 12.5 kHz			
Temperature, °C		25			
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	9.000	467.774990	-0.021	-0.500	0.500
-15	11.220	467.775000	0.000	-0.500	0.500
-10	11.880	467.775000	0.000	-0.500	0.500
-5	12.540	467.775000	0.000	-0.500	0.500
0	13.200	467.775000	0.000	-0.500	0.500
5	13.860	467.775000	0.000	-0.500	0.500
10	14.520	467.775000	0.000	-0.500	0.500
15	15.180	467.775000	0.000	-0.500	0.500
20	15.840	467.775000	0.000	-0.500	0.500

Frequency : 467.7750 MHz
 Channel Spacing : 12.50 kHz

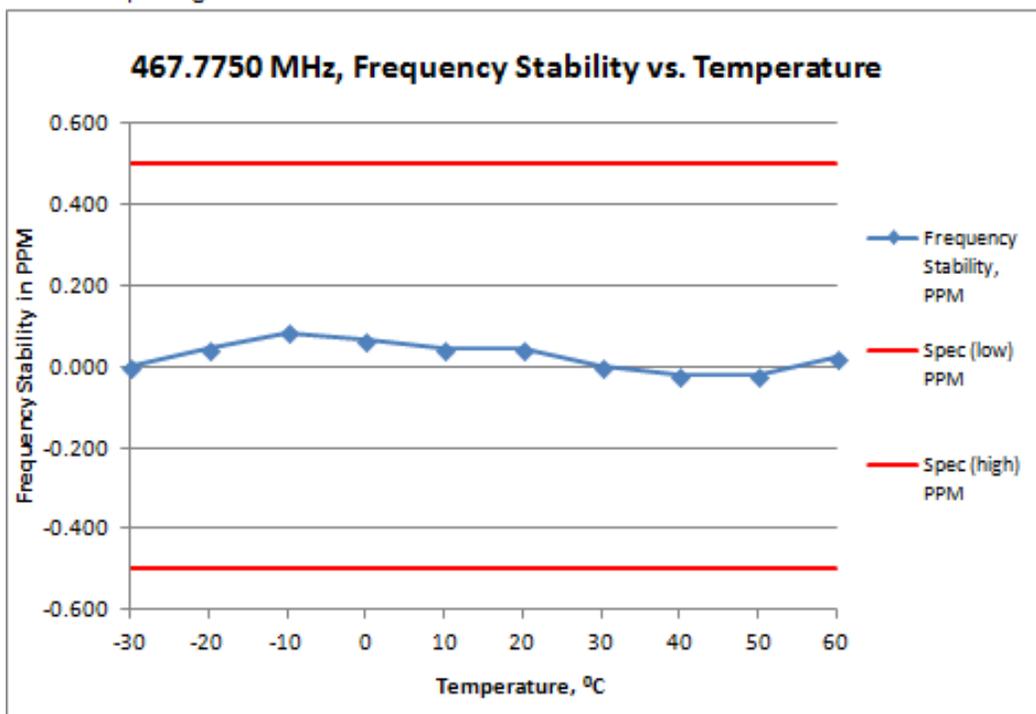

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing		467.7750 MHz / 12.5 kHz		
Voltage, V		13.2		
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.775000	0.000	-0.500	0.500
-20	467.775020	0.043	-0.500	0.500
-10	467.775040	0.086	-0.500	0.500
0	467.775030	0.064	-0.500	0.500
10	467.775020	0.043	-0.500	0.500
20	467.775020	0.043	-0.500	0.500
30	467.775000	0.000	-0.500	0.500
40	467.774990	-0.021	-0.500	0.500
50	467.774990	-0.021	-0.500	0.500
60	467.775010	0.021	-0.500	0.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 0.5ppm

6.3. Audio Frequency Response

6.3.1. Test Setup

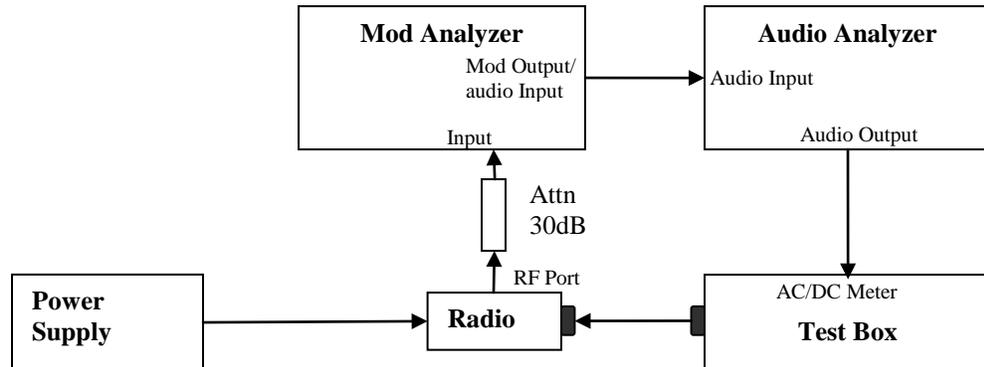


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the maximum deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

Not Applicable

6.3.3. Test Limit

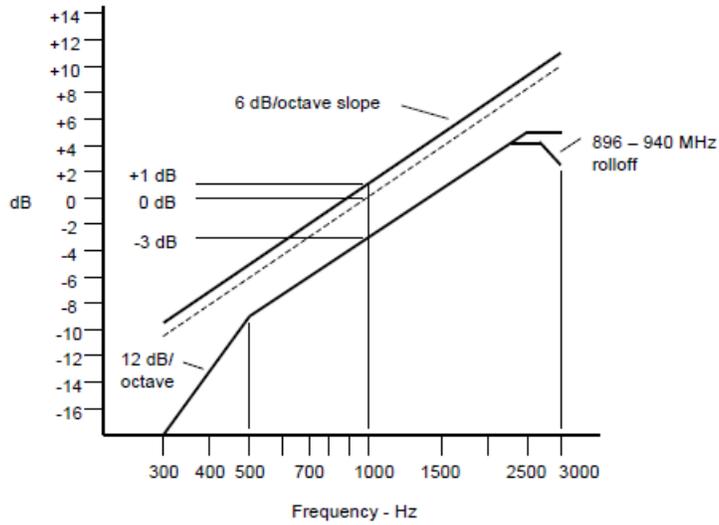


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

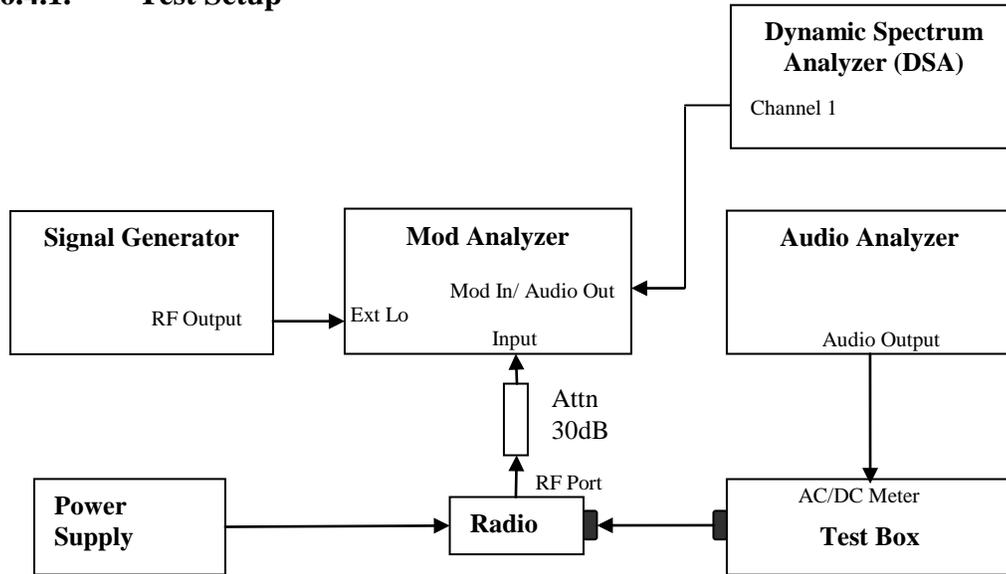


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

Not Applicable

6.4.3. Test Limit

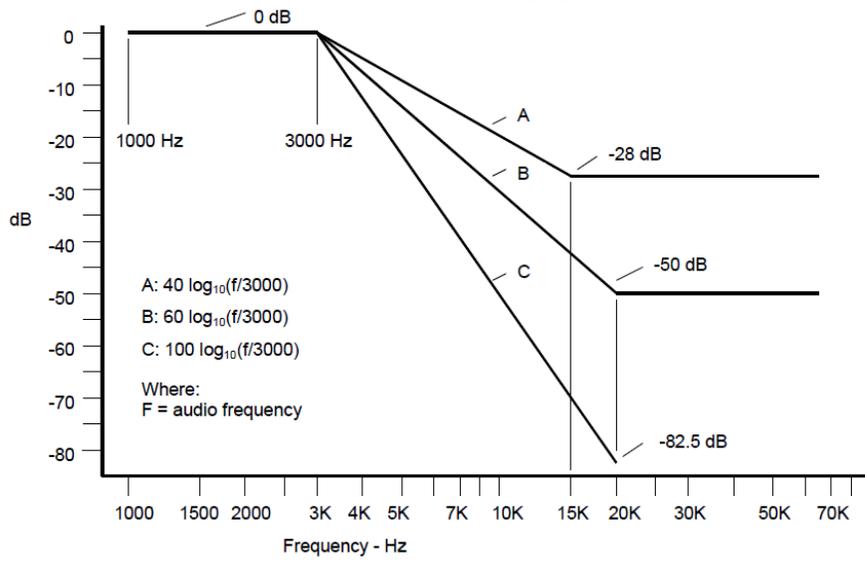

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

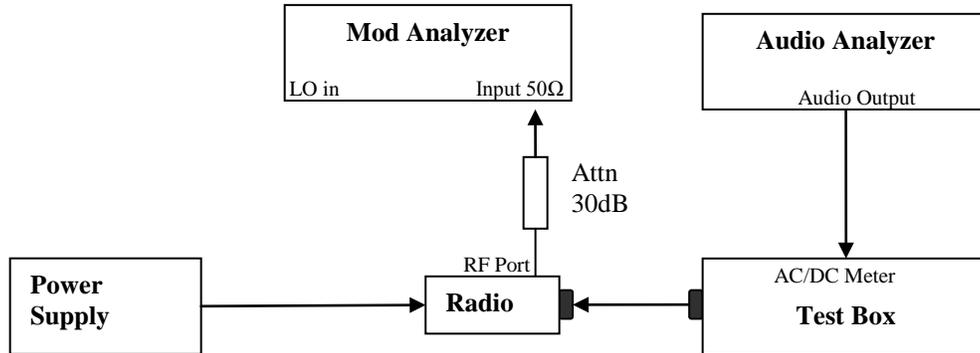

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result


Not Applicable

6.5.3. Test Limit

Modulation shall not exceed 100 percent if amplitude modulation is employed.

6.6. Occupied Bandwidth



6.6.1. Test Setup (Analog)


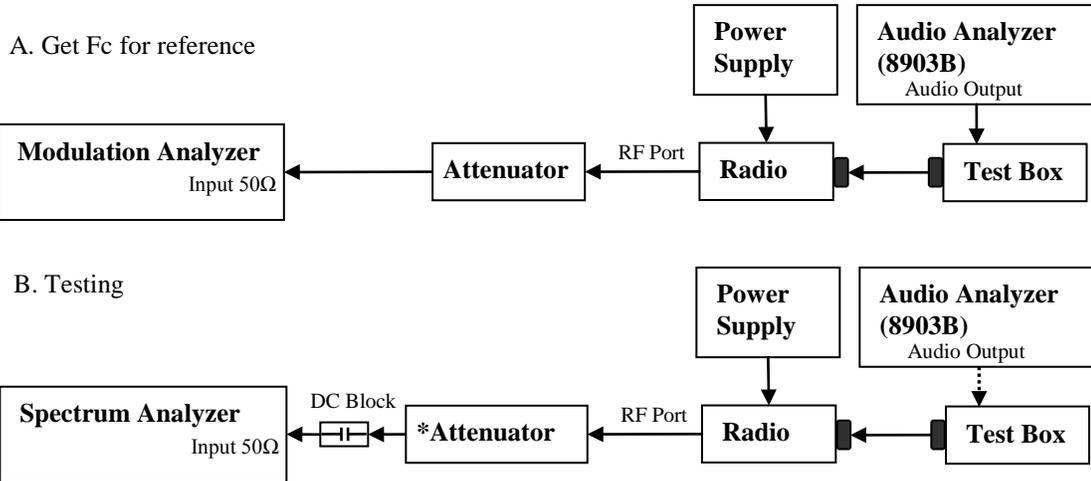




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.



* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

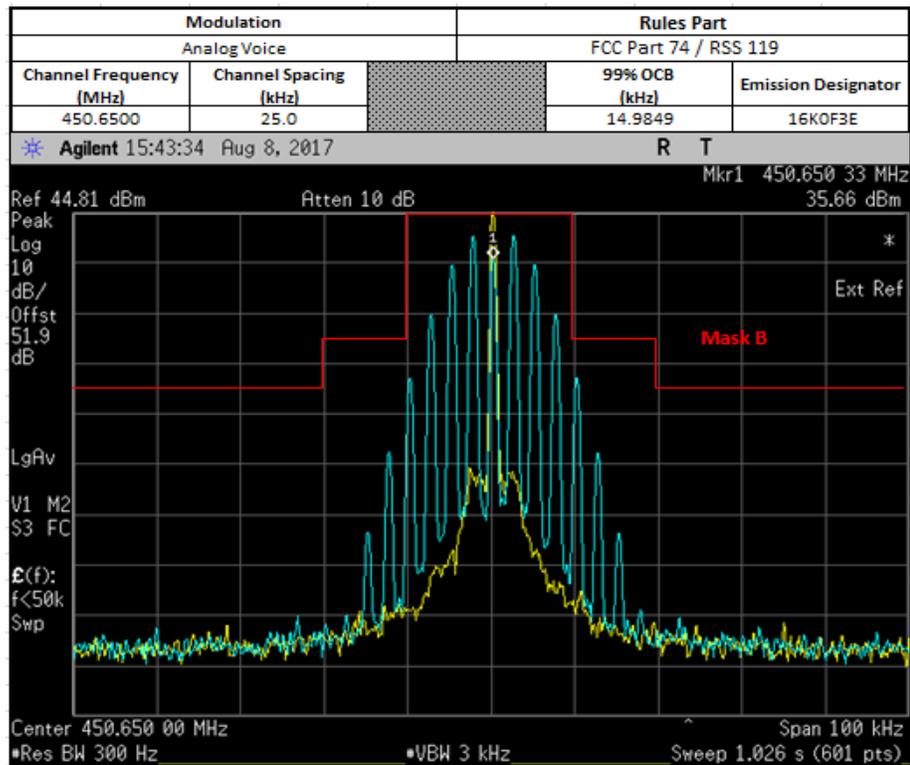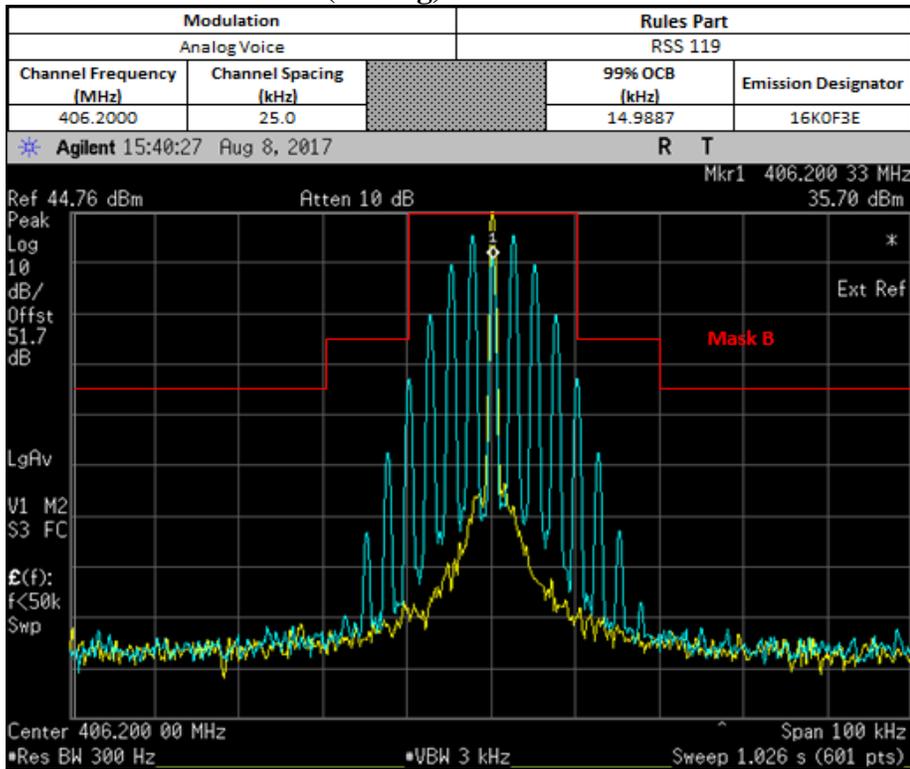


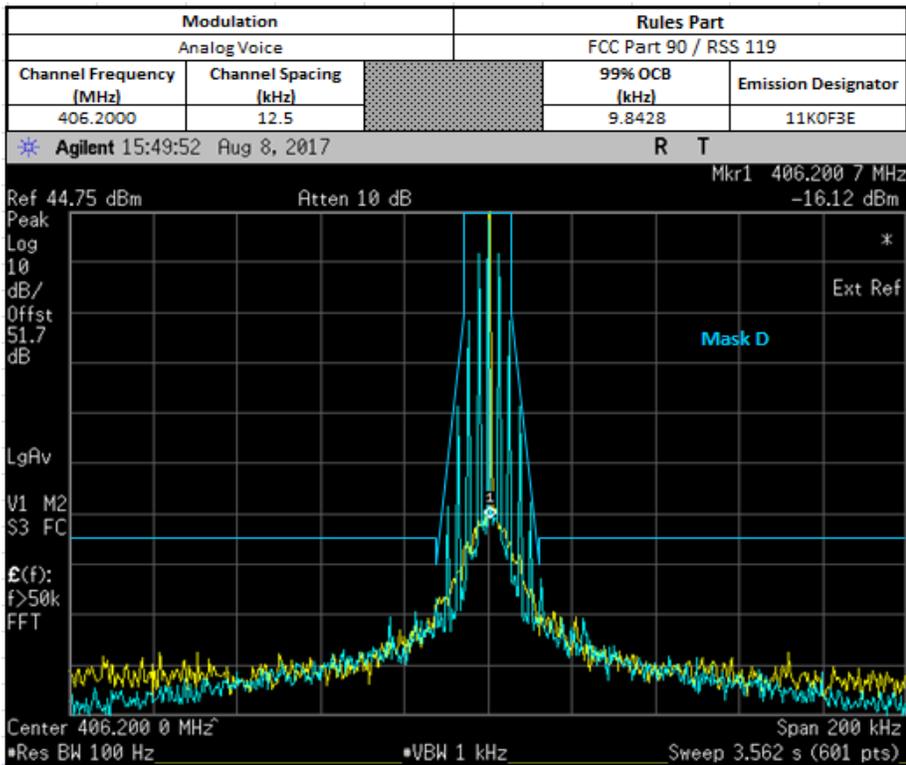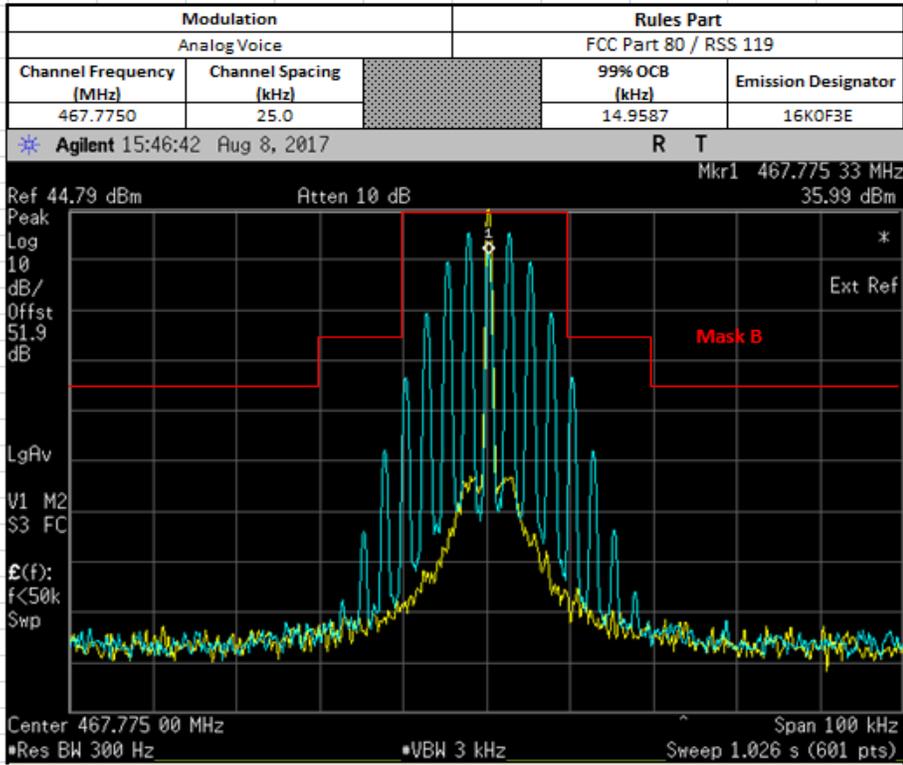

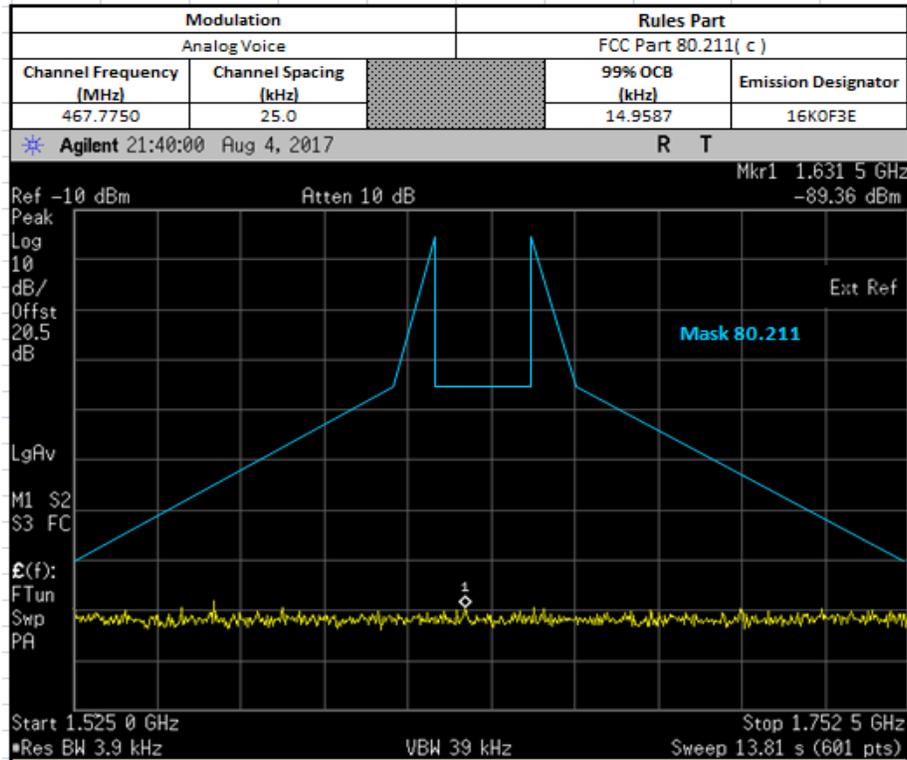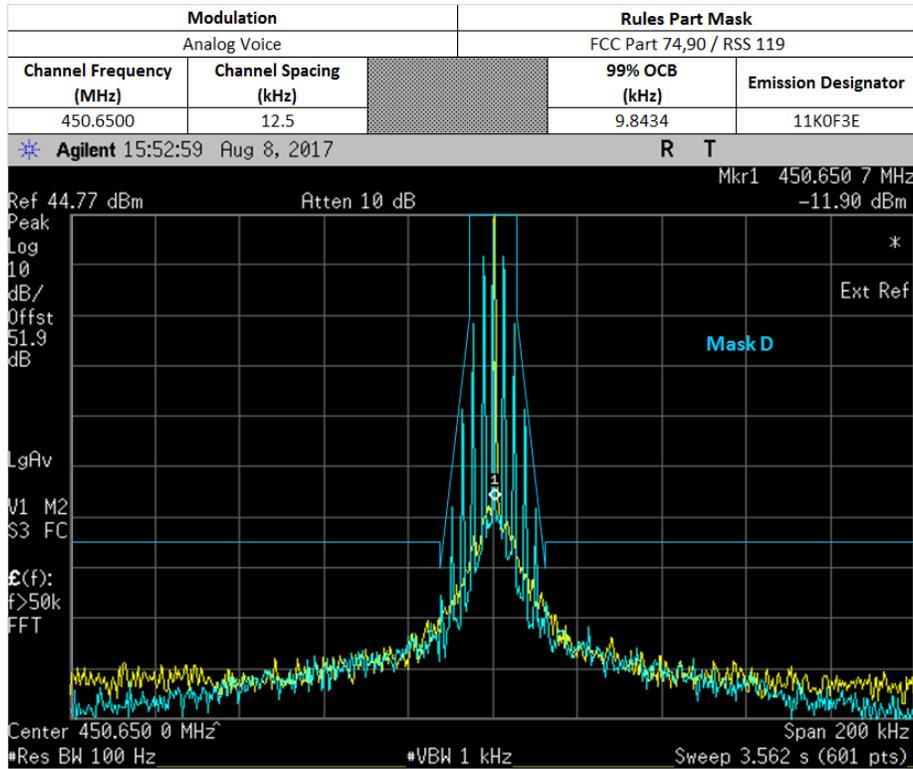

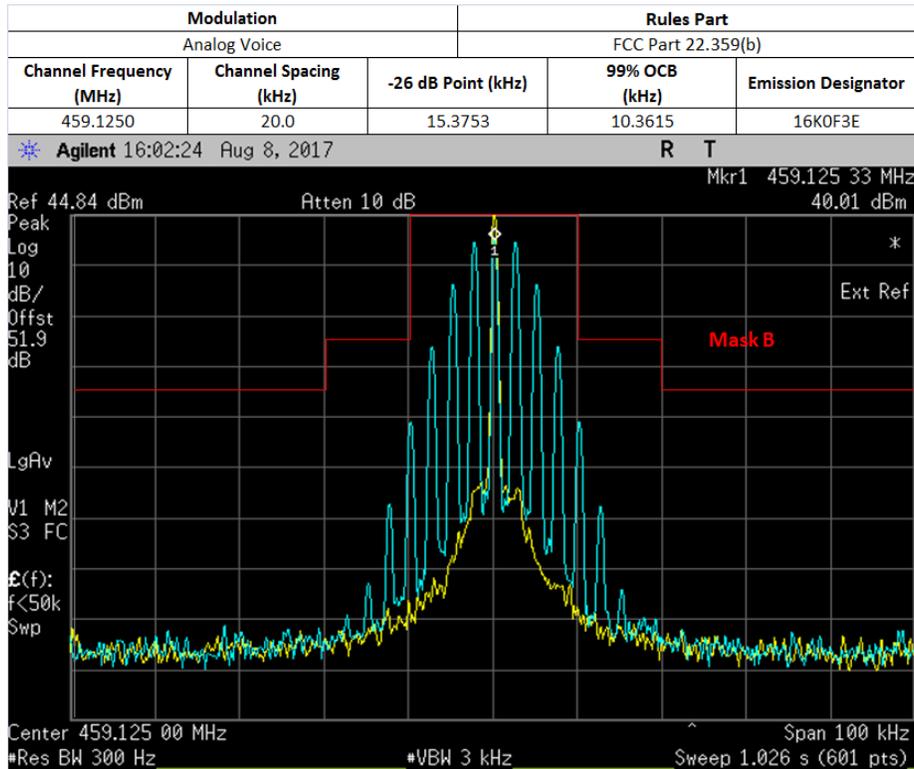
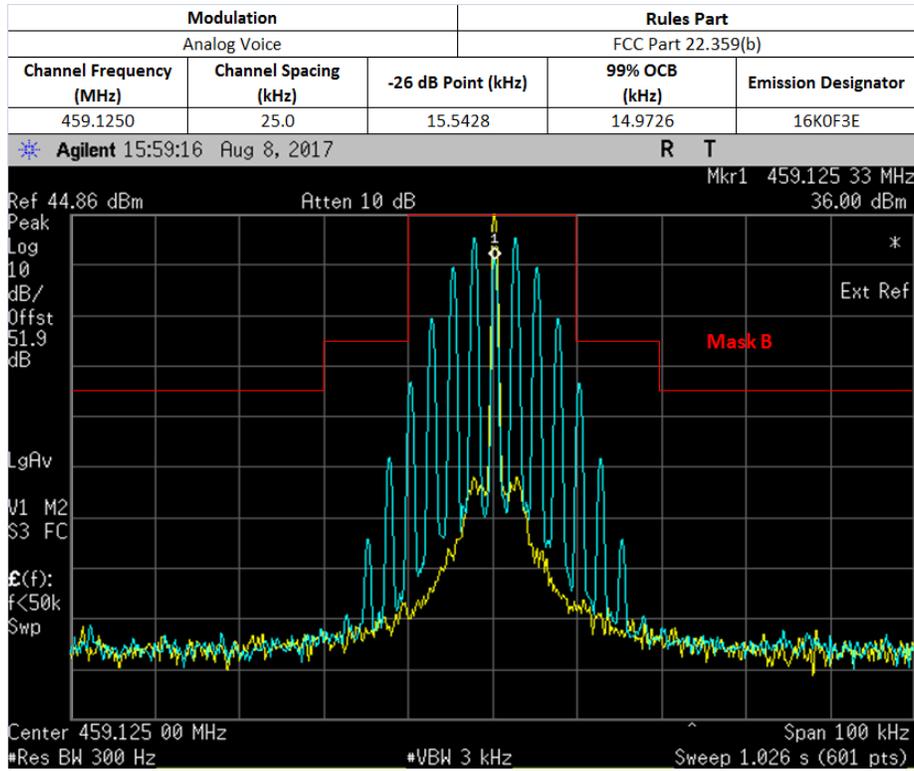




6.6.3. Test Setup (Digital)


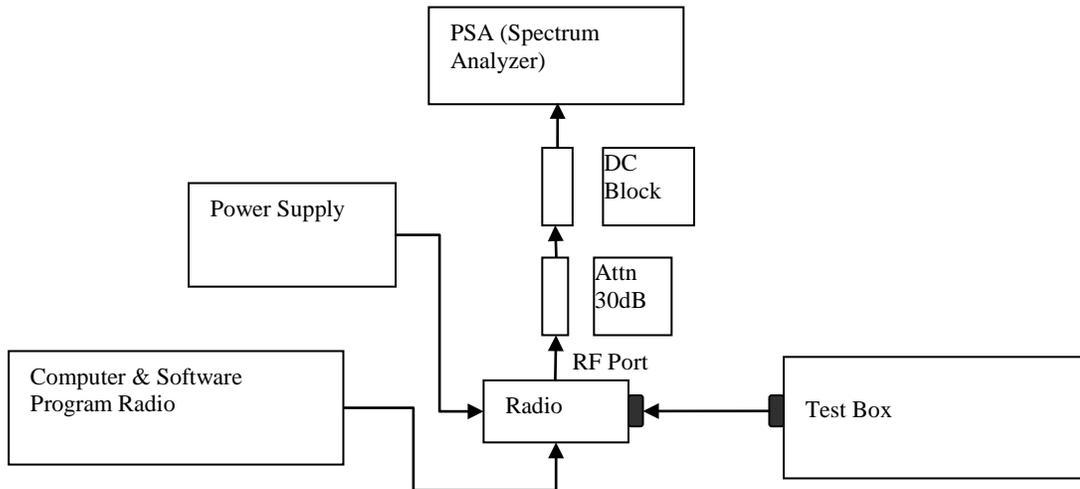




- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 4) Key in the Fc and RBW (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.


6.6.4. Test Result (Digital)

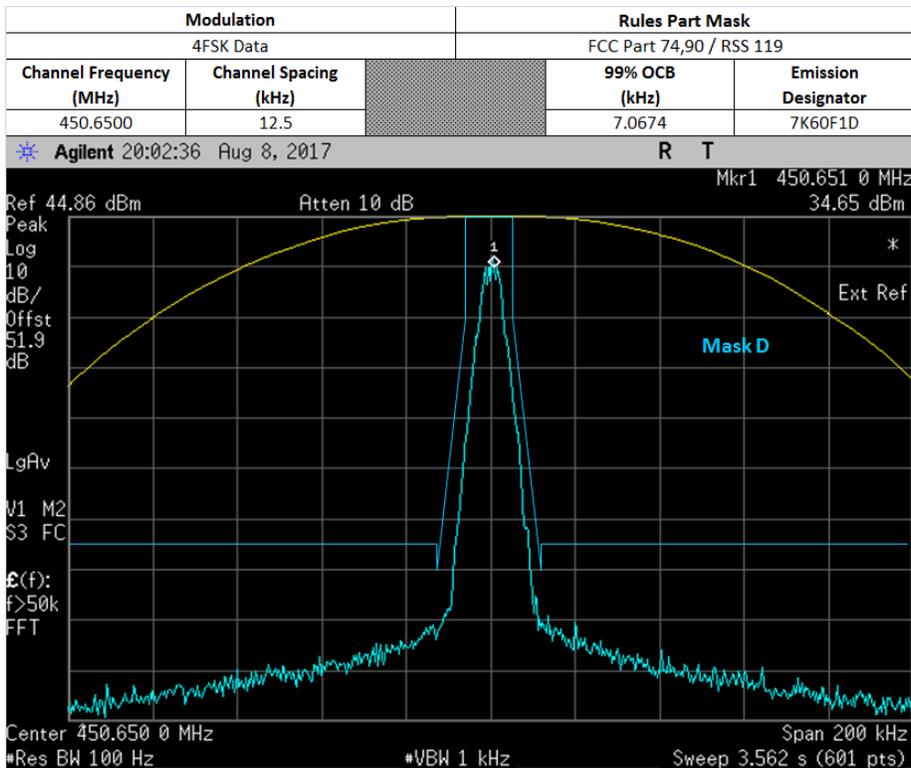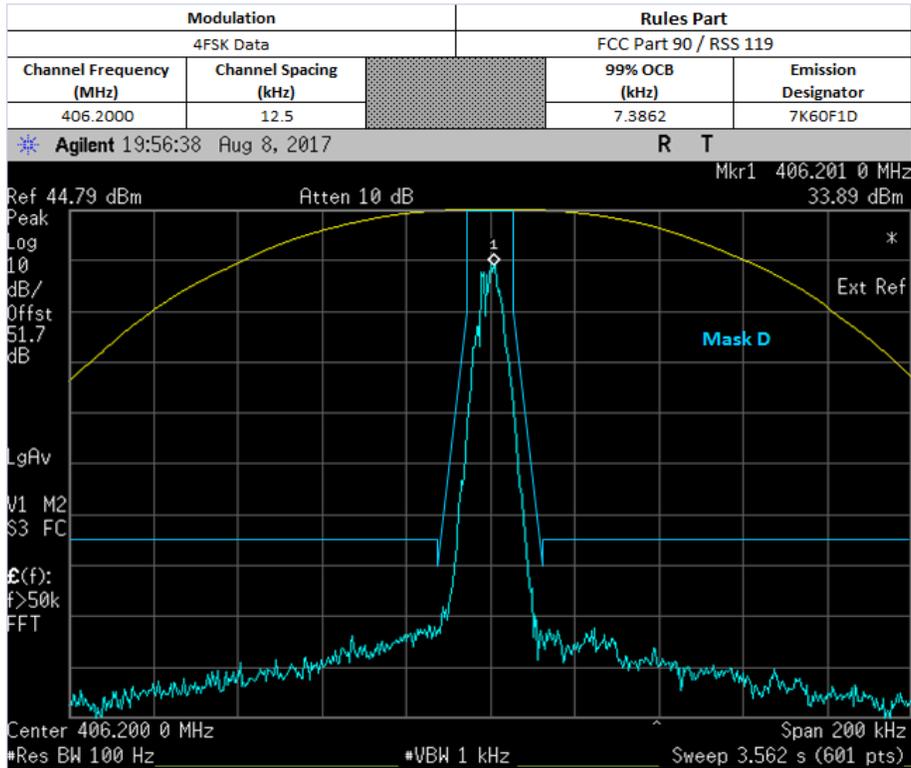

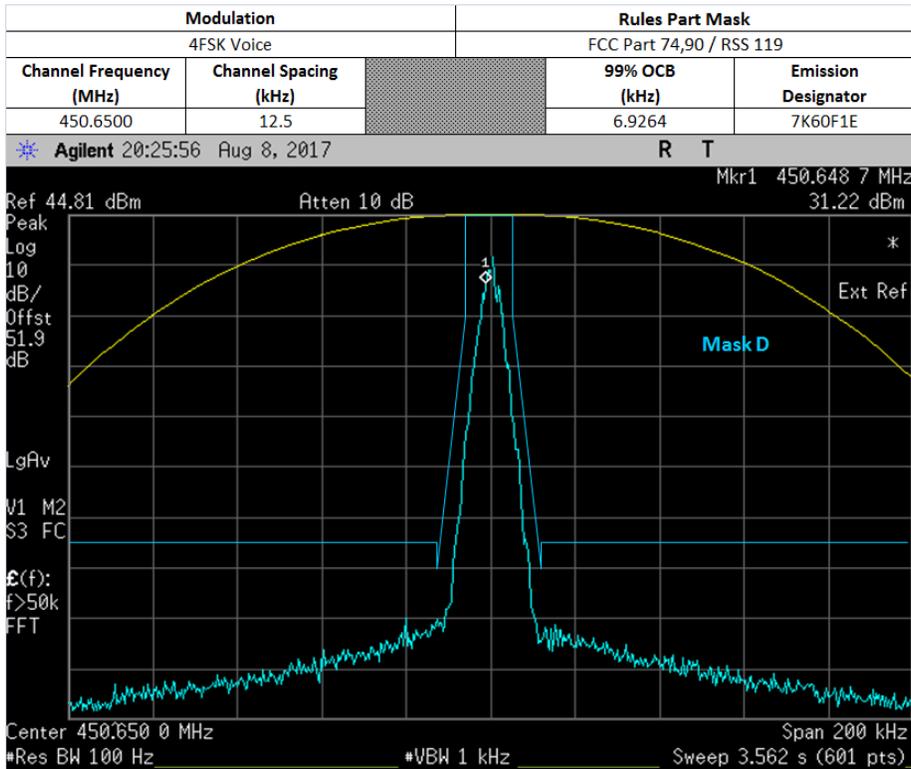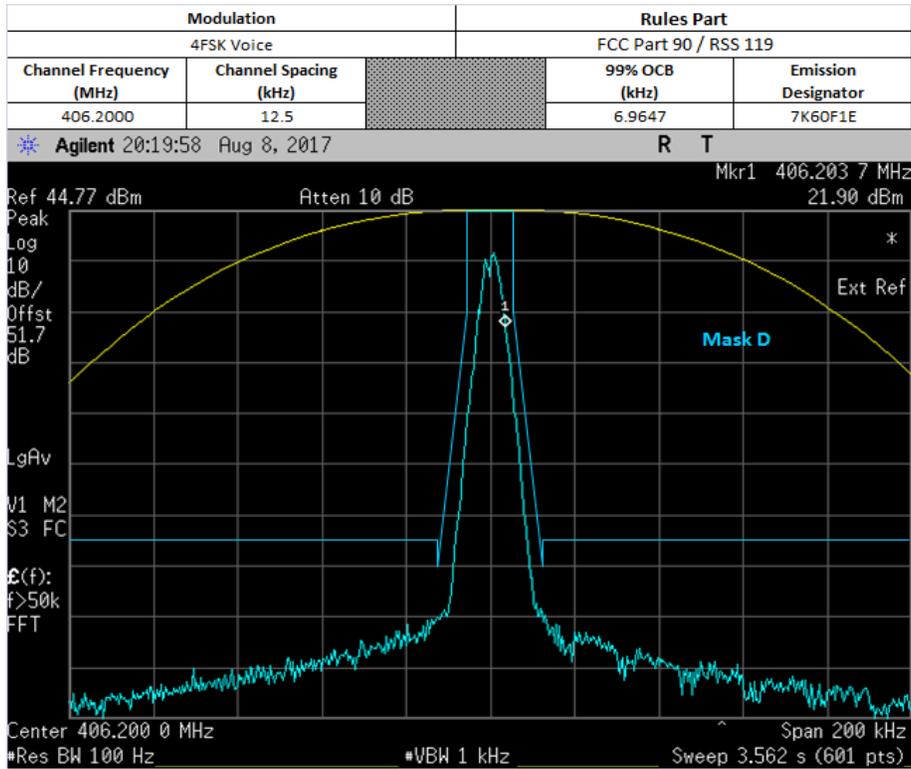

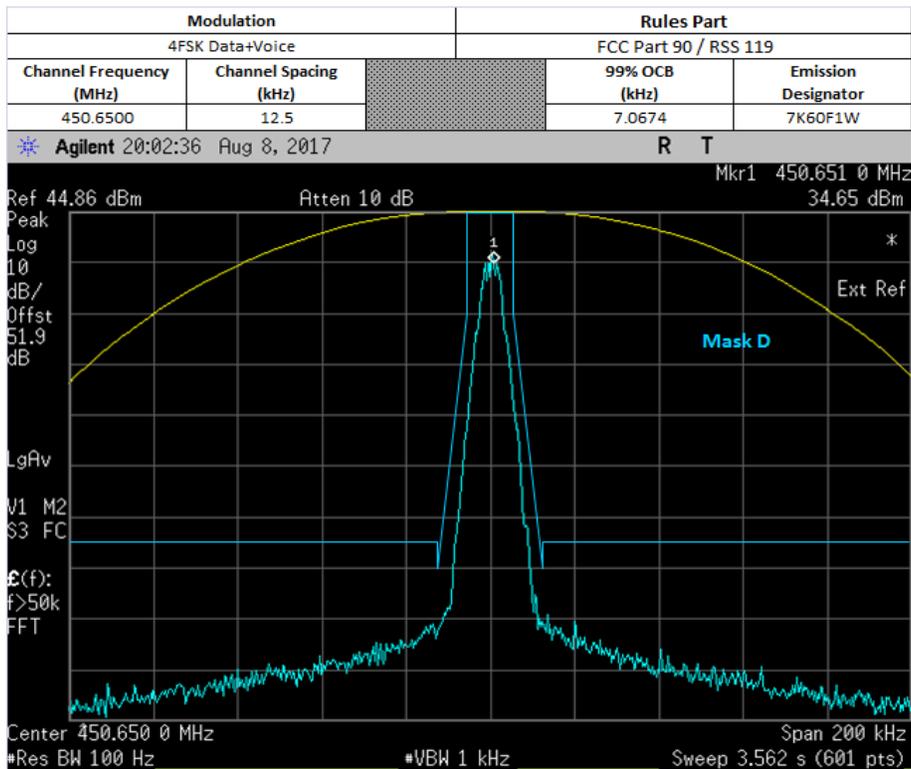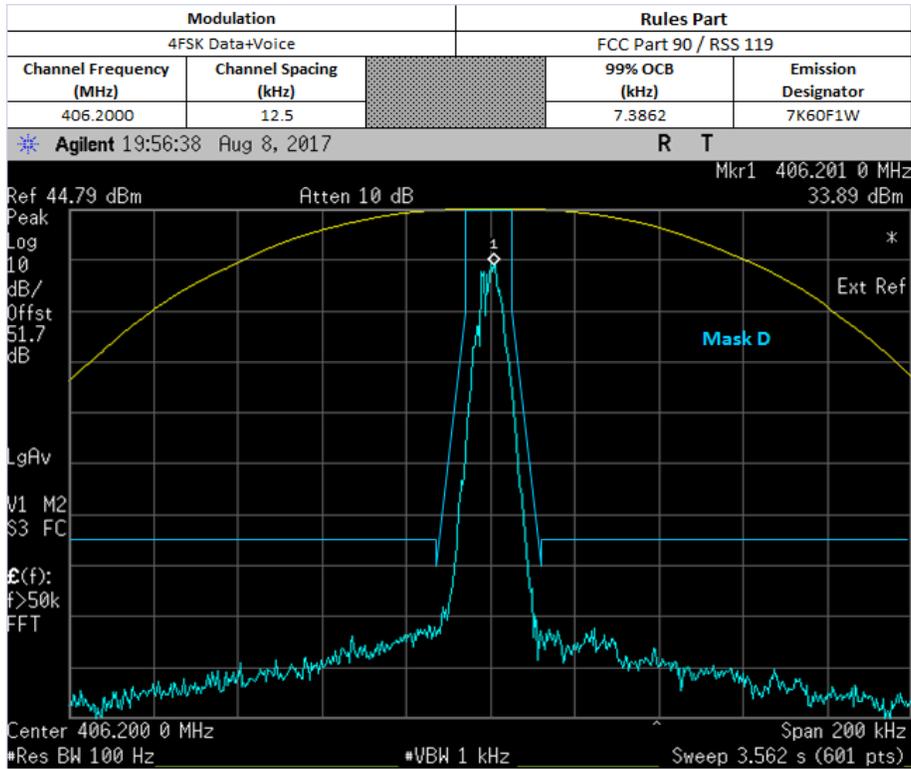

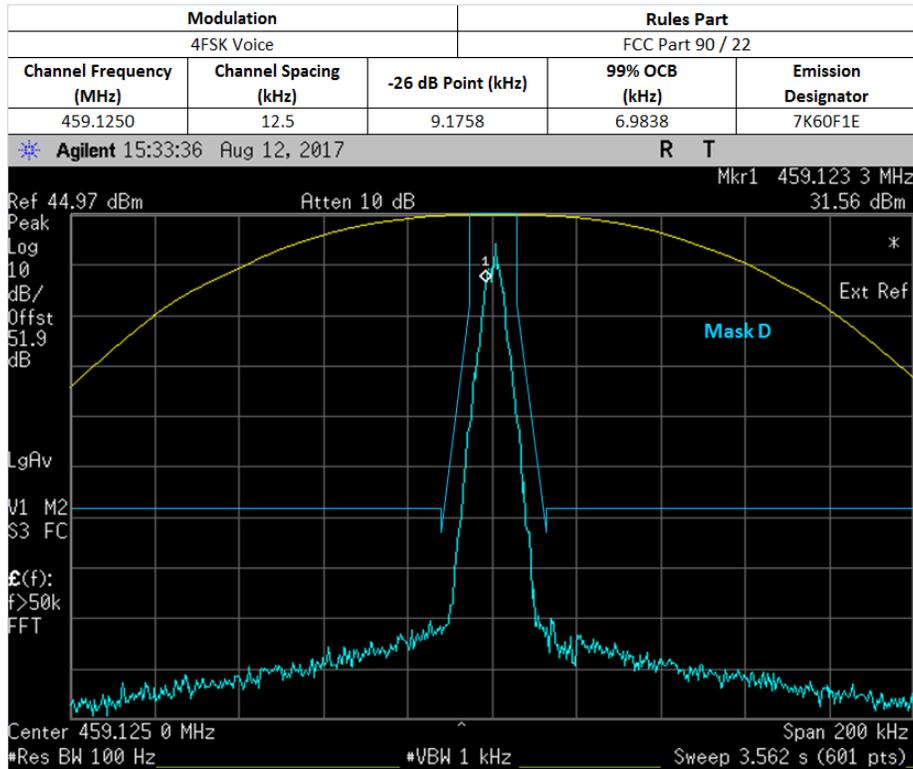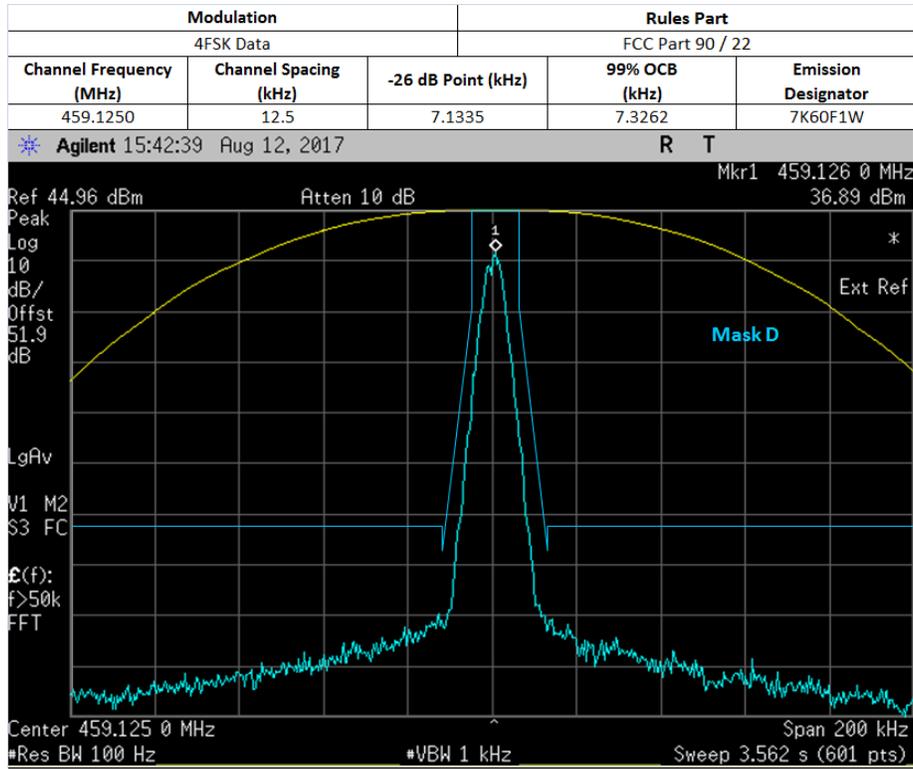

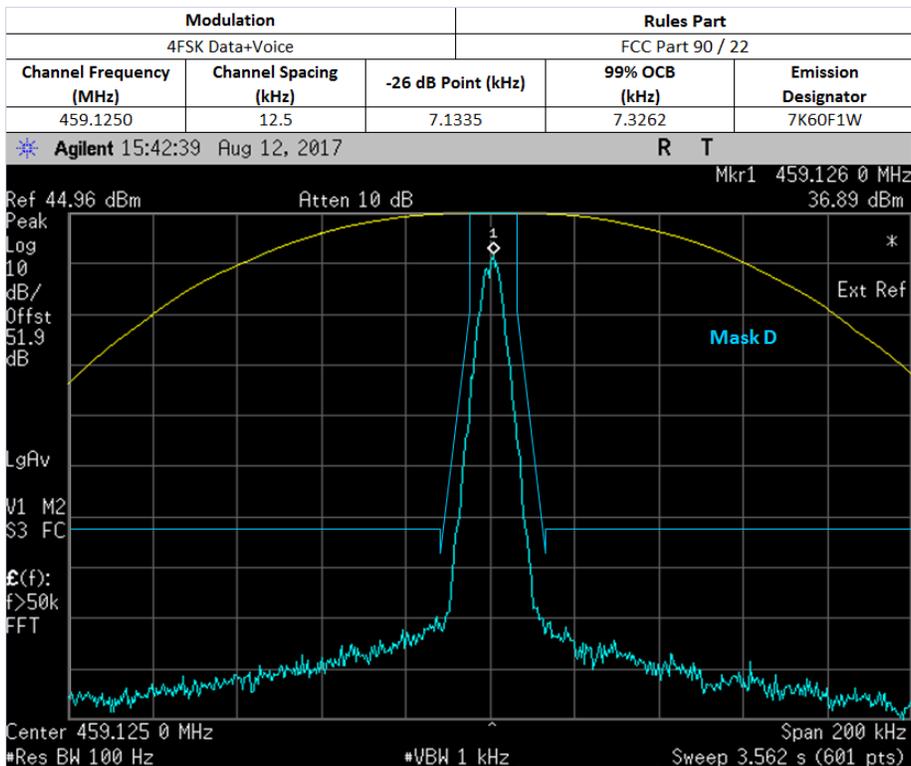


***Note: Emission designators 7K60FXD and 7K60FXE utilizes the same test pattern as 7K60F1E, 7K60F1D and 7K60F1W, and are therefore identical. Hence, only the latter 3 plots are shown.**

6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

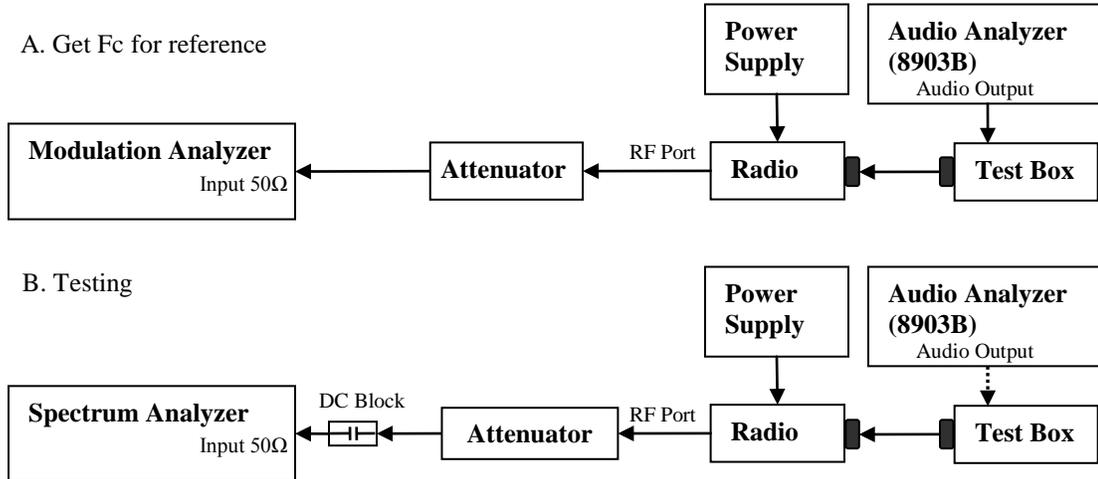


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Path loss for the measurement included.
- 4) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 5) Key in the Fc and RBW= 100Hz.
- 6) Transmit the DUT and record the occupied Bandwidth frequencies.
- 7) Preset the spectrum analyzer for band edge measurement.
- 8) The band edges of lowest and highest channels were measured.
- 9) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 10) Save the screen shot as modulated signal.
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

6.7.2. Test Result (Analog)

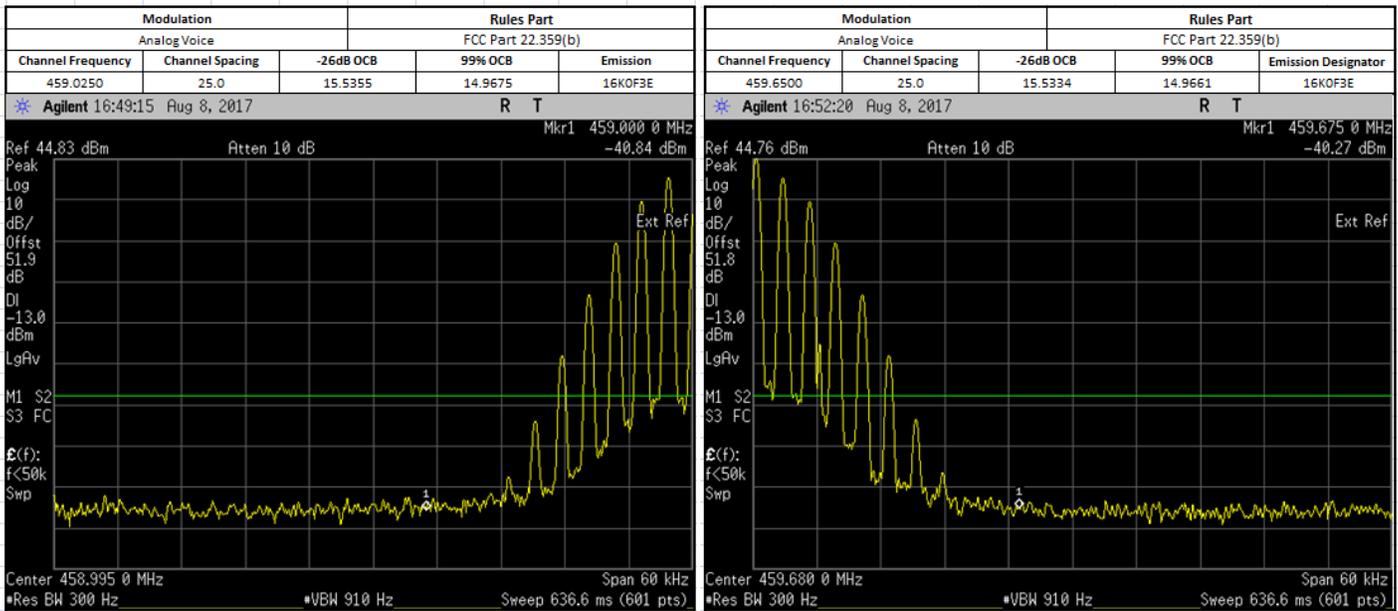

***Note: As 16K0F3E presented the worst case, only this data will be shown.**


6.7.3. Test Setup (Digital)

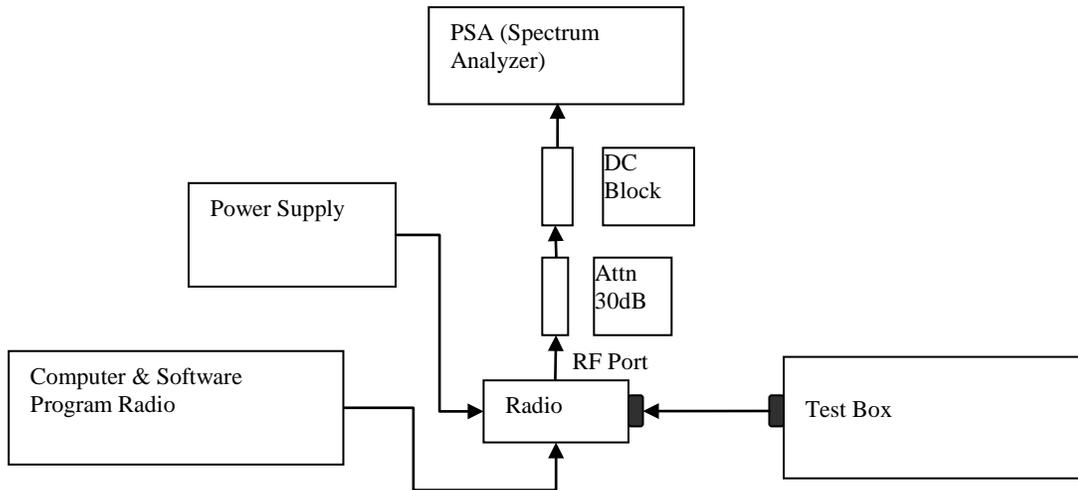

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK**, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and RBW= 100Hz.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) The band edges of lowest and highest channels were measured.
- 8) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 9) Save the screen shot.

*Note: Test patterns for all digital emissions (7K60F1E, 7K60F1D, 7K60F1W, 7K60FXE, 7K60FXW) are identical, hence only 7K60F1D is shown.

6.7.4. Test Result (Digital)

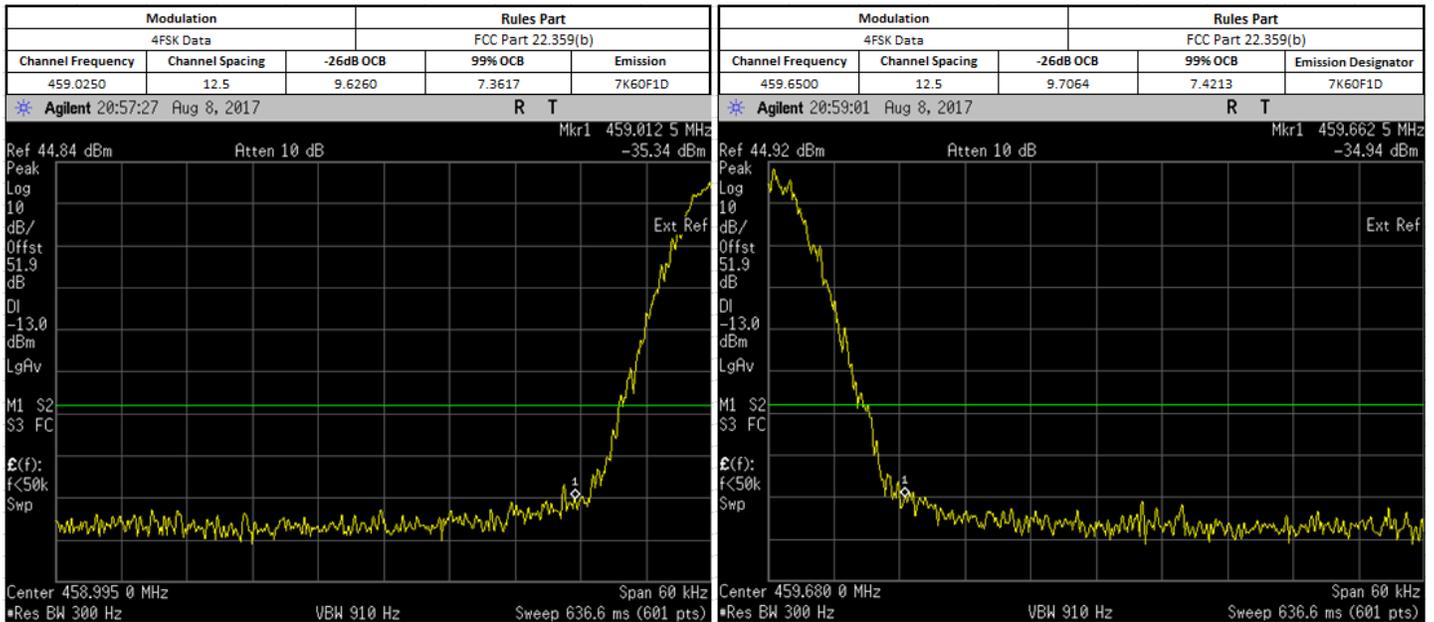


6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.



6.8. Transient Frequency Behavior

6.8.1. Test Setup


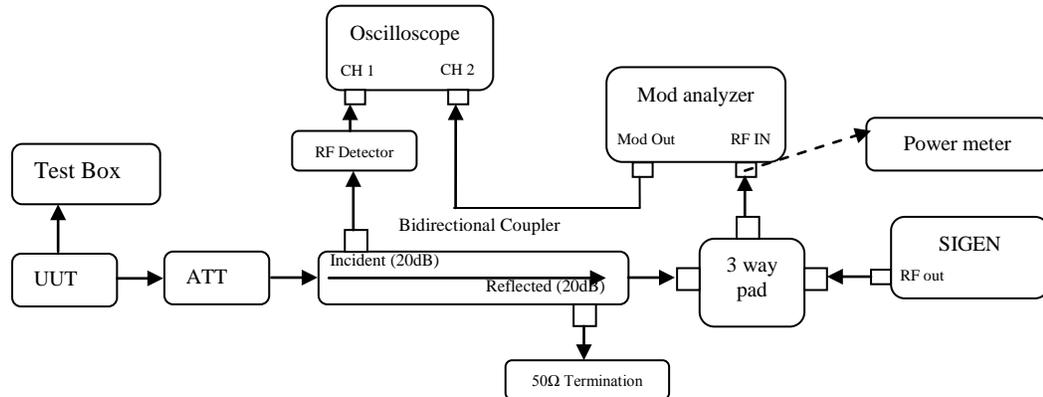


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when UUT is keying up.
- 6) Note the power level on power meter and dekey the UUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz. Adjust the vertical amplitude control of the oscilloscope to display the 1000 Hz at $\square 4$ divisions vertically centered on the display.
- 10) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 11) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result
Analog: 467.775 MHz, 12.5 kHz Channel Spacing, Max Power

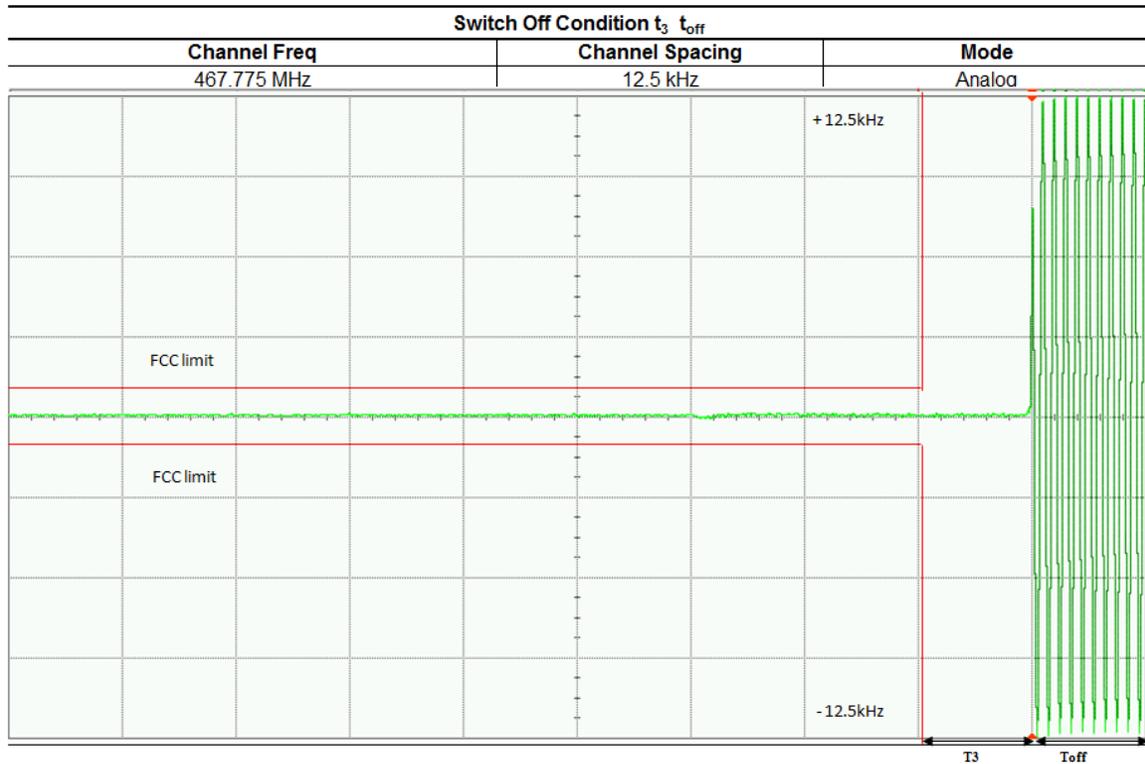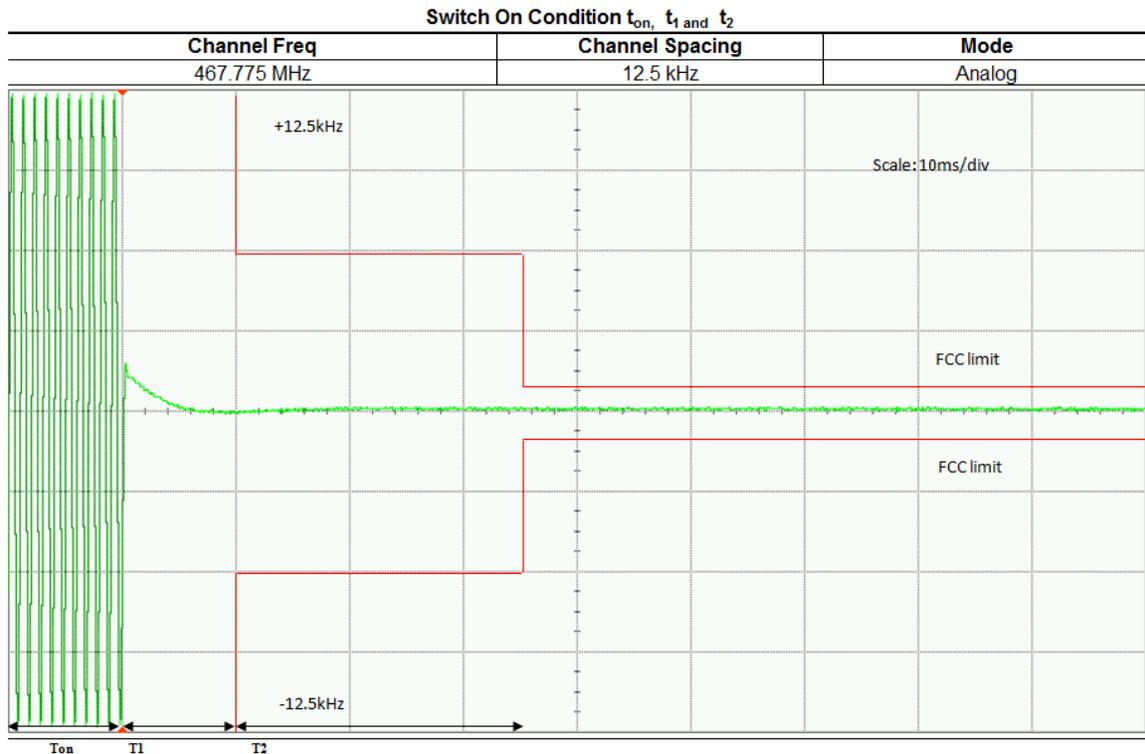

Analog: 467.7750 MHz, 25 kHz Channel Spacing, Max Power (Not For FCC Review)

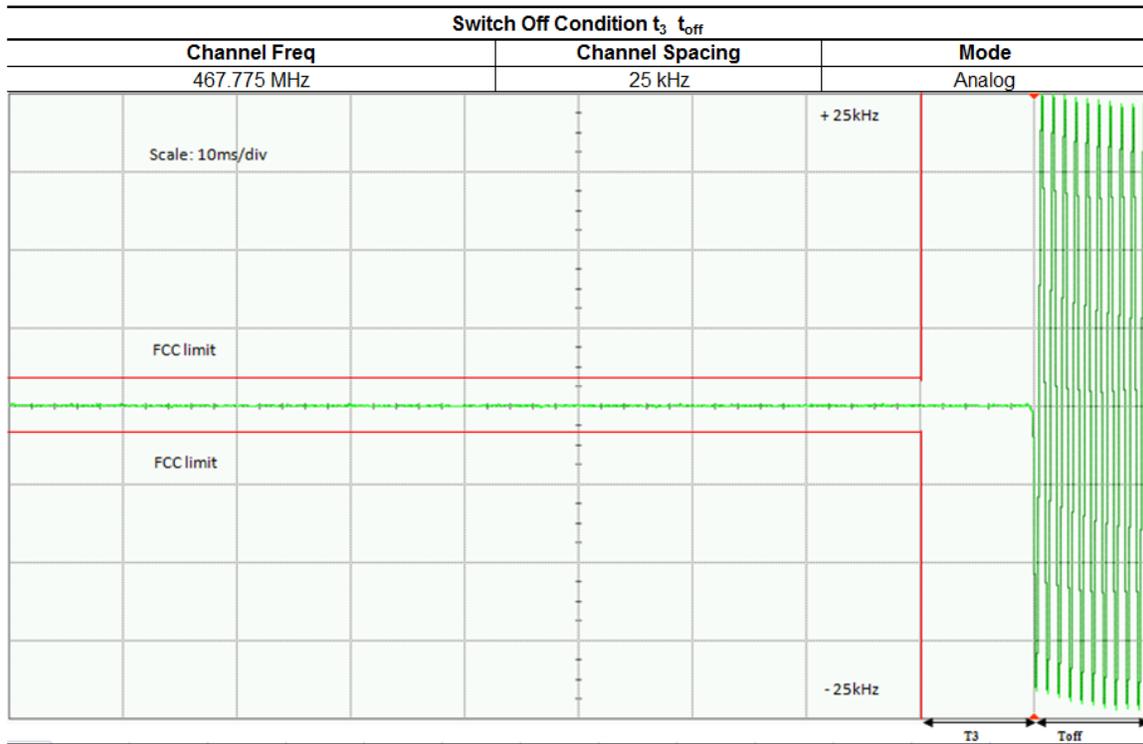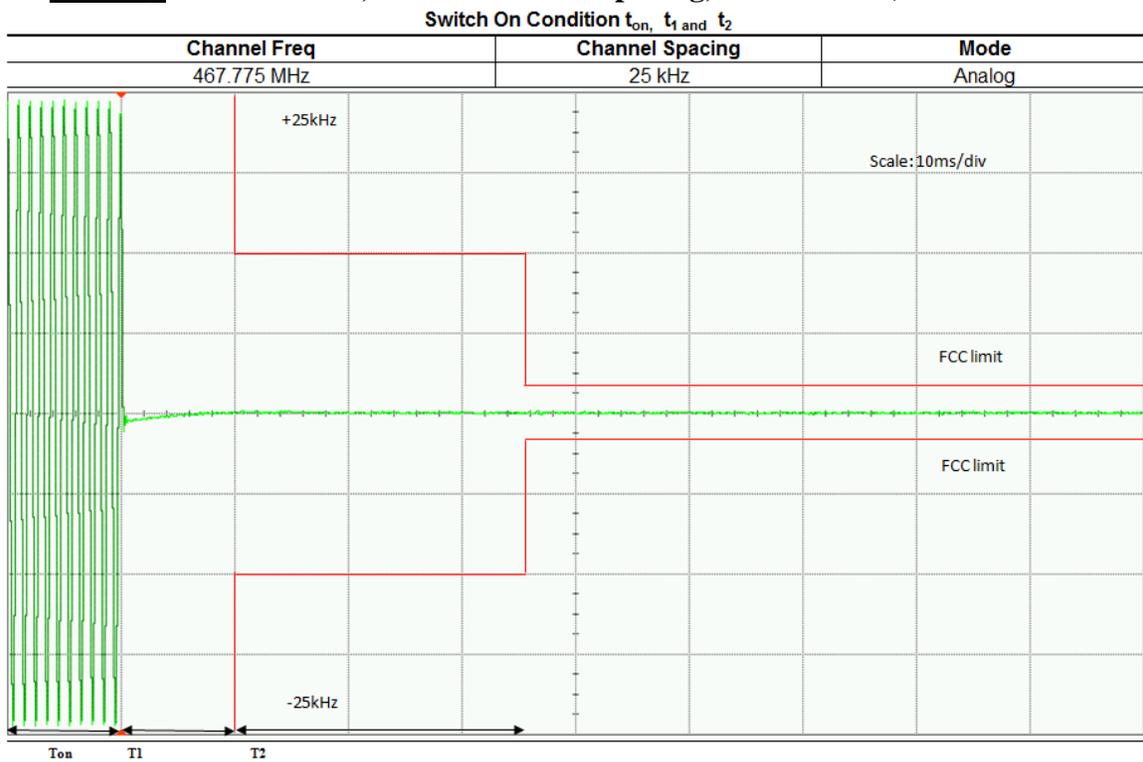

6.8.3. Test Limit


Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

- ¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
- t₁ is the time period immediately following t_{on}.
- t₂ is the time period immediately following t₁.
- t₃ is the time period from the instant when the transmitter is turned off until t_{off}.
- t_{off} is the instant when the 1 kHz test signal starts to rise.
- ² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.
- ³ Difference between the actual transmitter frequency and the assigned transmitter frequency.
- ⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power


6.9.1. Test Setup (Analog)

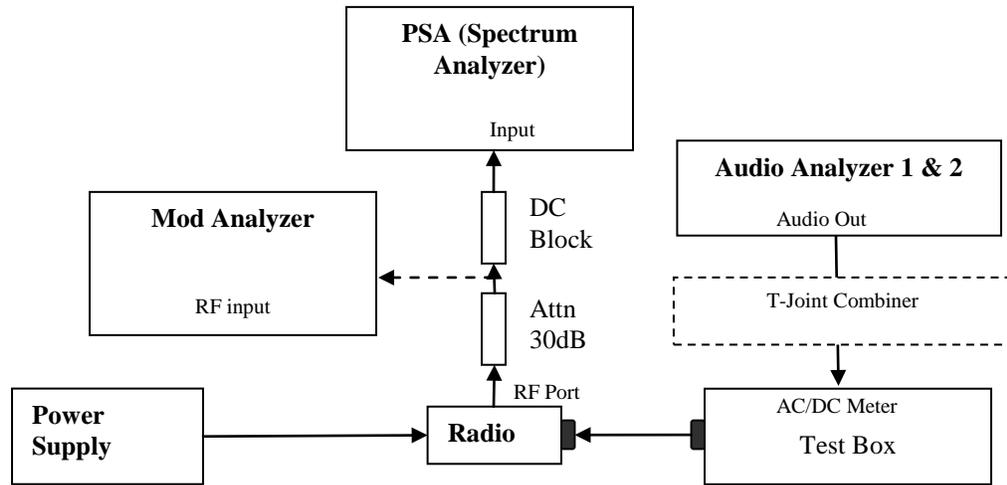

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 4) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 5) Turn both audio analyzers ON and up 10dB amplitude level.
- 6) Connect the output to PSA and set to assigned center frequency.
- 7) Set Span, RBW and VBW as shown in FCC rules part 90.543.
- 8) Transmit the radio and record the ACP value in dBc.

6.9.2. Test Result **Not Applicable**

6.9.3. Test Setup (Digital)

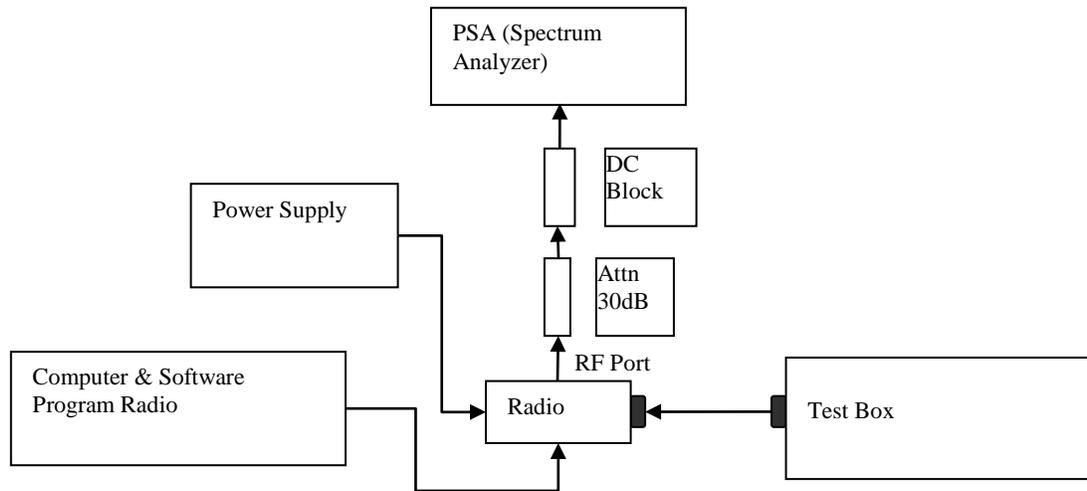

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Prepare setup as per picture.
- 4) Turn on the ACP Measurement – Press Measure, ACP.
- 5) Set Span, RBW and VBW as shown in FCC rules part 90.543.
- 6) Transmit the radio and record the ACP value in dBc.

6.9.4. Test Result **Not Applicable**

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

6.10. Conducted Spurious Emission


6.10.1. Test Setup

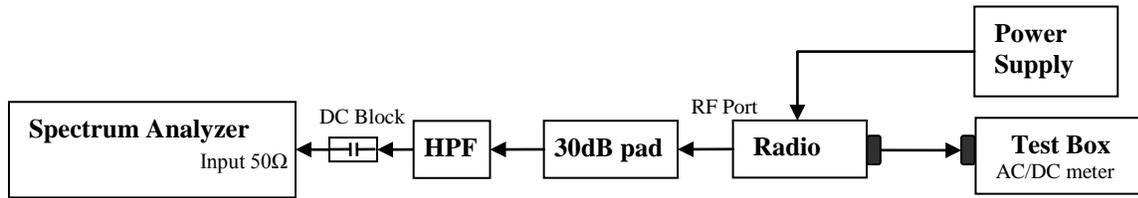

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Adjust the PSA RBW = 100kHz for spur emission below 1GHz, and 1MHz for spur emission above 1GHz.
- 4) Set the Ref offset from the pathloss offset calibration file.
- 5) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - (a) The lowest radio frequency to $F_c - \text{Test BW}$
 - (b) $F_c + \text{Test BW}$ to $\text{Freq} < 2F_c$.
- 6) Record the levels of spurious emissions and dekey the UUT.
- 7) Turn On HPF path and Key up the UUT.
- 8) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$.
- 9) The levels recorded are the absolute levels of conducted spurious emissions in dBm.


6.10.2. Test Result (Analog)

Analog: 406.2 MHz, 25 kHz Channel Spacing, Max Power_(Not for FCC Review) RSS 119

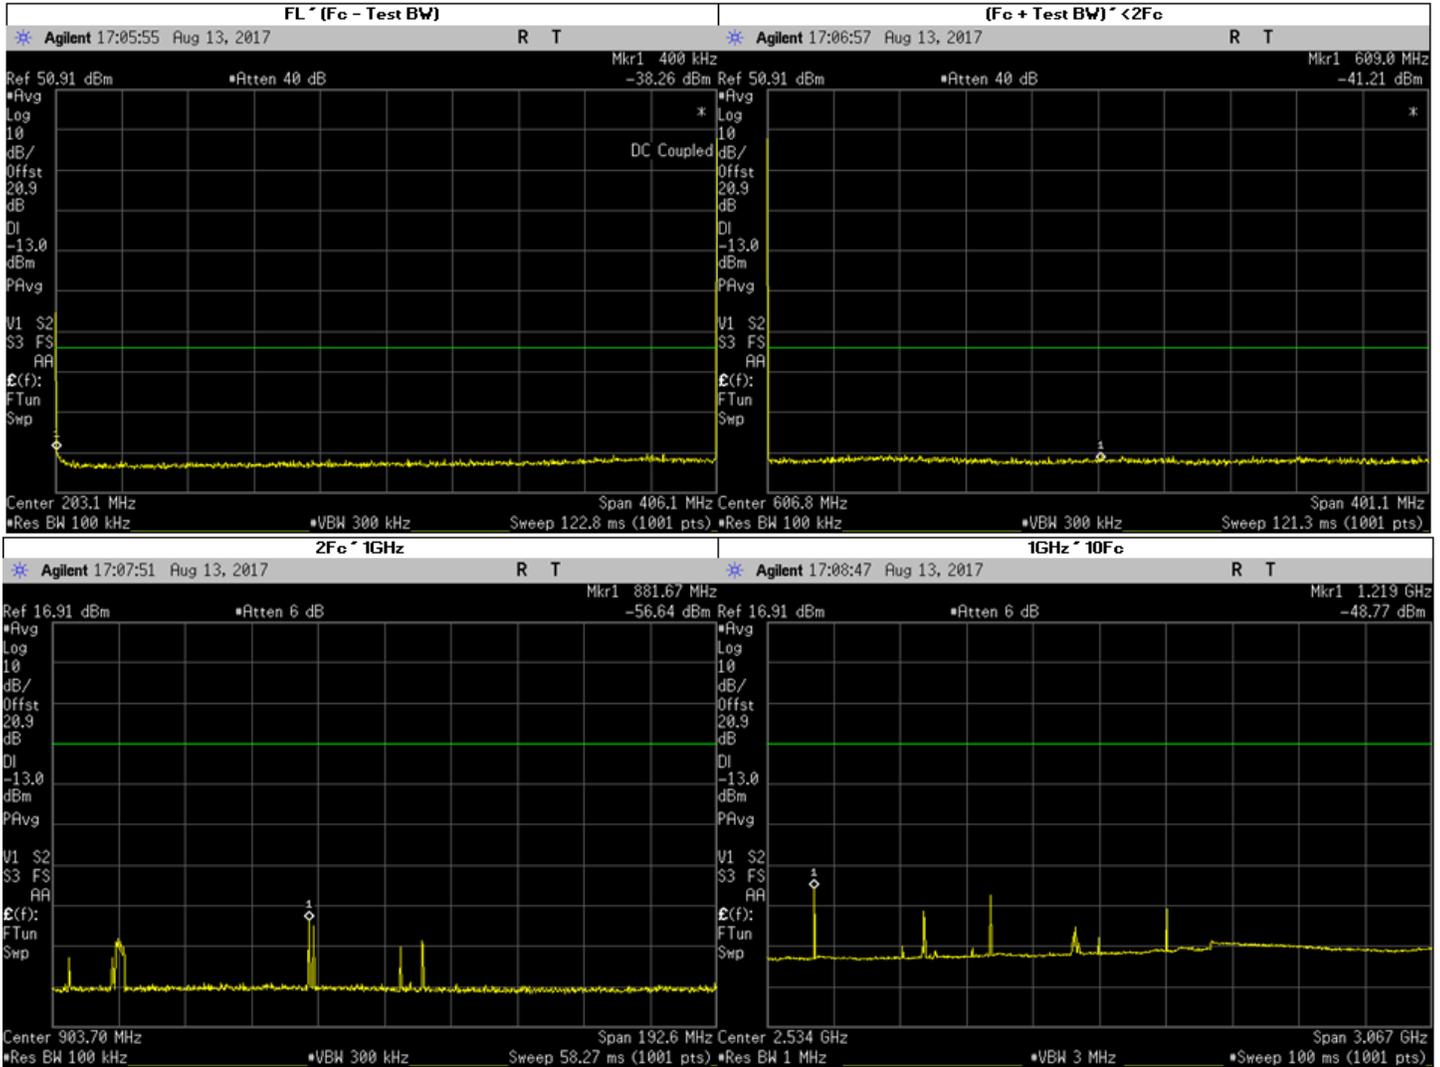


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4147	-38.26	-13	PASS
(Fc-Test BW) ~ 1GHz	609.0319	-39.43	-13	PASS
1GHz ~ 2Fc	881.67	-56.64	-13	PASS
	883.0162	-57.93	-13	PASS
	826.4484	-61.15	-13	PASS
	914.5710	-61.81	-13	PASS
	827.0256	-62.04	-13	PASS
	812.4000	-65.84	-13	PASS
2Fc ~ 10Fc	1219.0000	-48.77	-13	PASS
	2841.4260	-53.87	-13	PASS
	1723.0890	-54.42	-13	PASS
	2421.6660	-58.37	-13	PASS
	2412.4740	-60.59	-13	PASS
	2528.9040	-60.79	-13	PASS
	1624.8000	-63.12	-13	PASS
	2031.0000	-57.60	-13	PASS
	2437.2000	-62.37	-13	PASS
	2843.4000	-60.60	-13	PASS
	3249.6000	-62.56	-13	PASS
	3655.8000	-63.77	-13	PASS
	4062.0000	-63.54	-13	PASS

**Analog: 450.65 MHz, 25 kHz Channel Spacing, Max Power
Part 74, RSS 119**

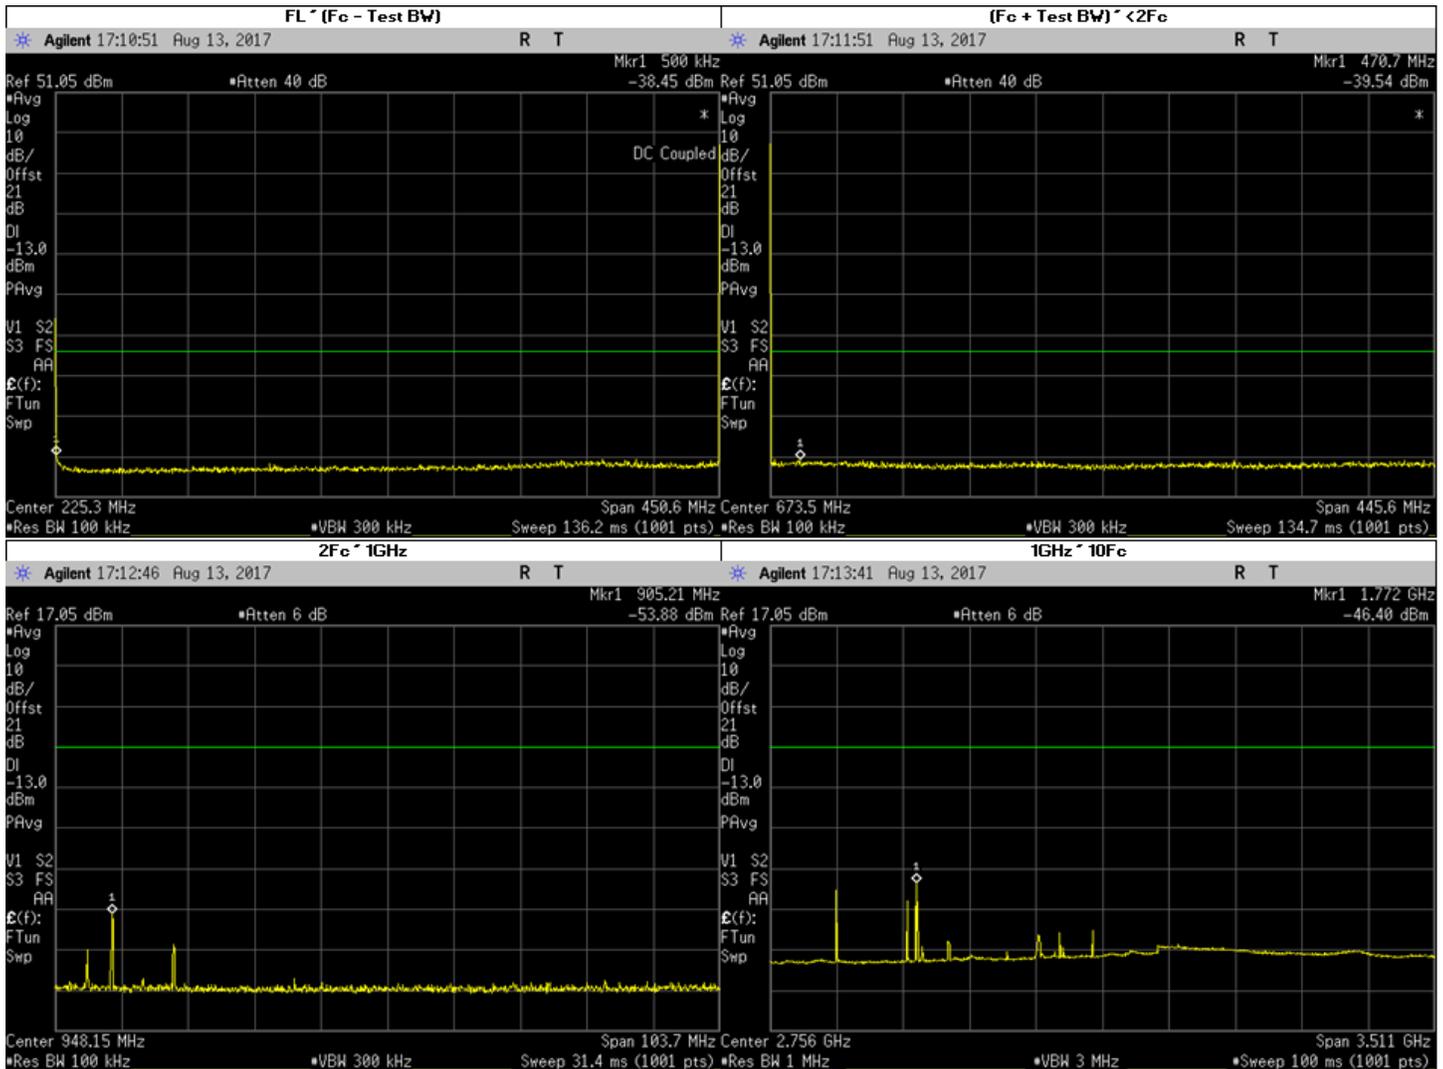


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4591	-38.45	-13	PASS
(Fc-Test BW) ~ 1GHz	470.7385	-39.54	-13	PASS
1GHz ~ 2Fc	905.2093	-53.88	-13	PASS
	914.7402	-61.48	-13	PASS
	901.3762	-68.41	-13	PASS
	933.5947	-69.91	-13	PASS
	909.9747	-69.93	-13	PASS
	901.3000	-64.27	-13	PASS
2Fc ~ 10Fc	1771.7580	-46.40	-13	PASS
	1722.6460	-50.78	-13	PASS
	1778.7740	-51.04	-13	PASS
	2701.3760	-58.11	-13	PASS
	2529.4850	-58.74	-13	PASS
	1351.9500	-53.48	-13	PASS
	1802.6000	-62.24	-13	PASS
	2253.2500	-63.92	-13	PASS
	2703.9000	-62.72	-13	PASS
	3154.5500	-61.64	-13	PASS
	3605.2000	-63.71	-13	PASS
	4055.8500	-63.12	-13	PASS
	4506.5000	-64.63	-13	PASS

Analog: 459.125 MHz, 25 kHz Channel Spacing, Max Power
Part 22

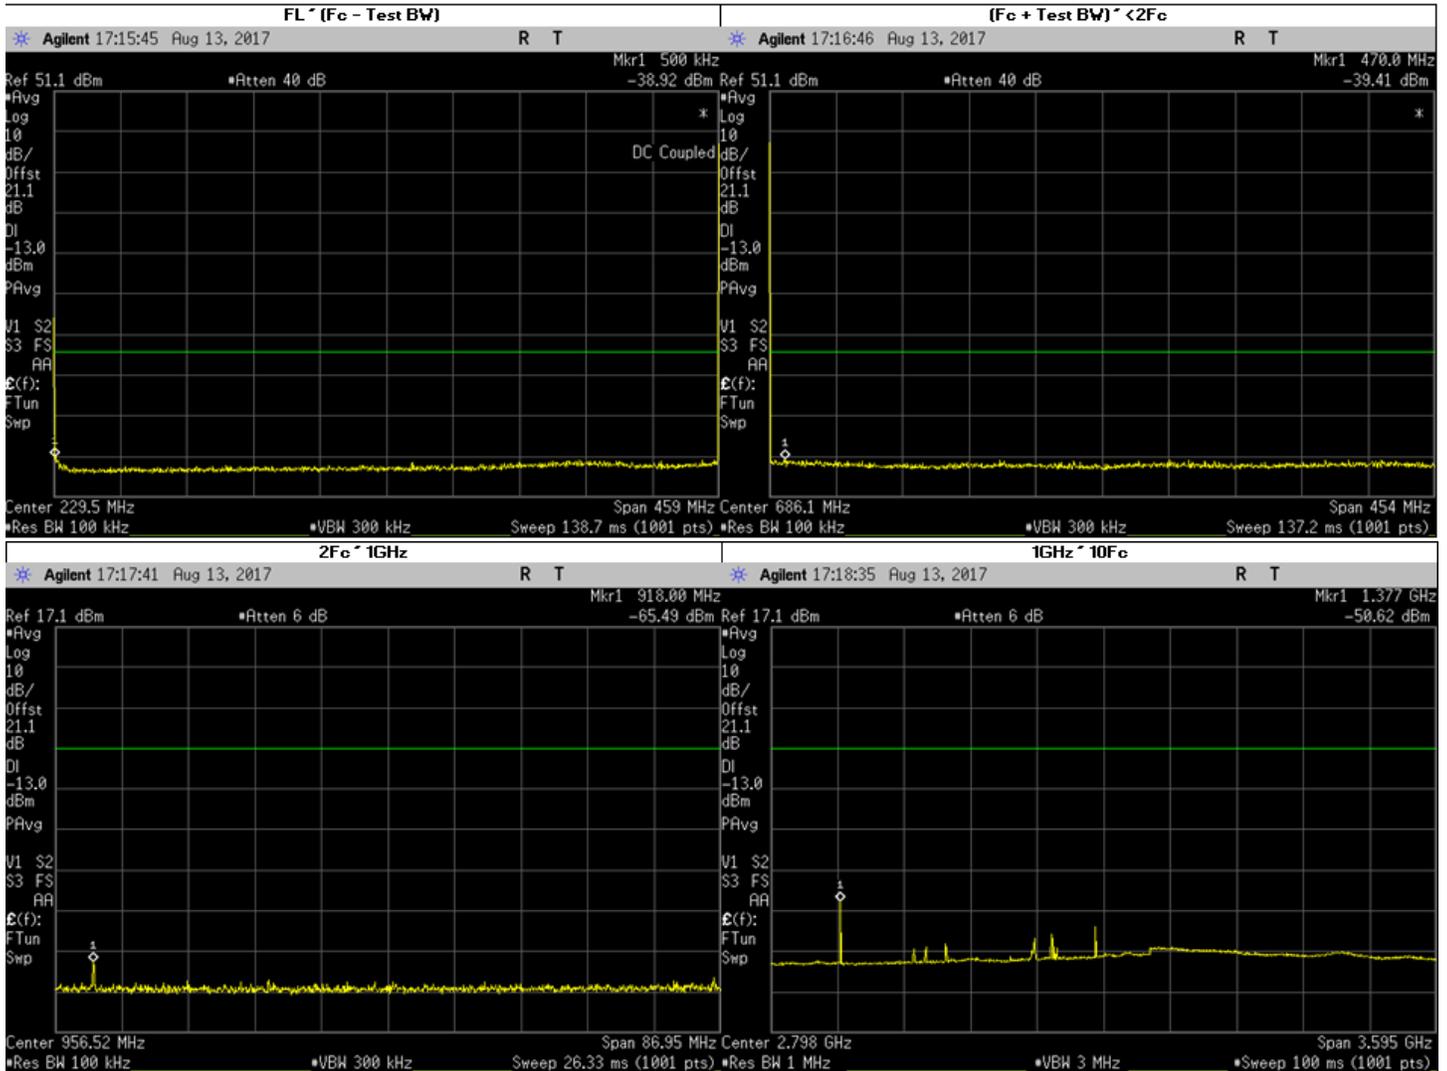


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4675	-38.92	-13	PASS
(Fc-Test BW) ~ 1GHz	469.9662	-39.41	-13	PASS
1GHz ~ 2Fc	918.0	-65.49	-13	PASS
2Fc ~ 10Fc	2422.6920	-59.58	-13	PASS
	3065.7780	-61.67	-13	PASS
	3116.0750	-61.85	-13	PASS
	3152.0020	-61.87	-13	PASS
	3205.8920	-61.89	-13	PASS
	1377.3750	-51.13	-13	PASS
	1836.5000	-61.74	-13	PASS
	2295.6250	-64.92	-13	PASS
	2754.7500	-59.95	-13	PASS
	3213.8750	-62.18	-13	PASS
	3673.0000	-63.71	-13	PASS
	4132.1250	-63.51	-13	PASS
	4591.2500	-64.83	-13	PASS

**Analog: 467.775 MHz, 25 kHz Channel Spacing, Max Power
 Part 80, RSS-119**

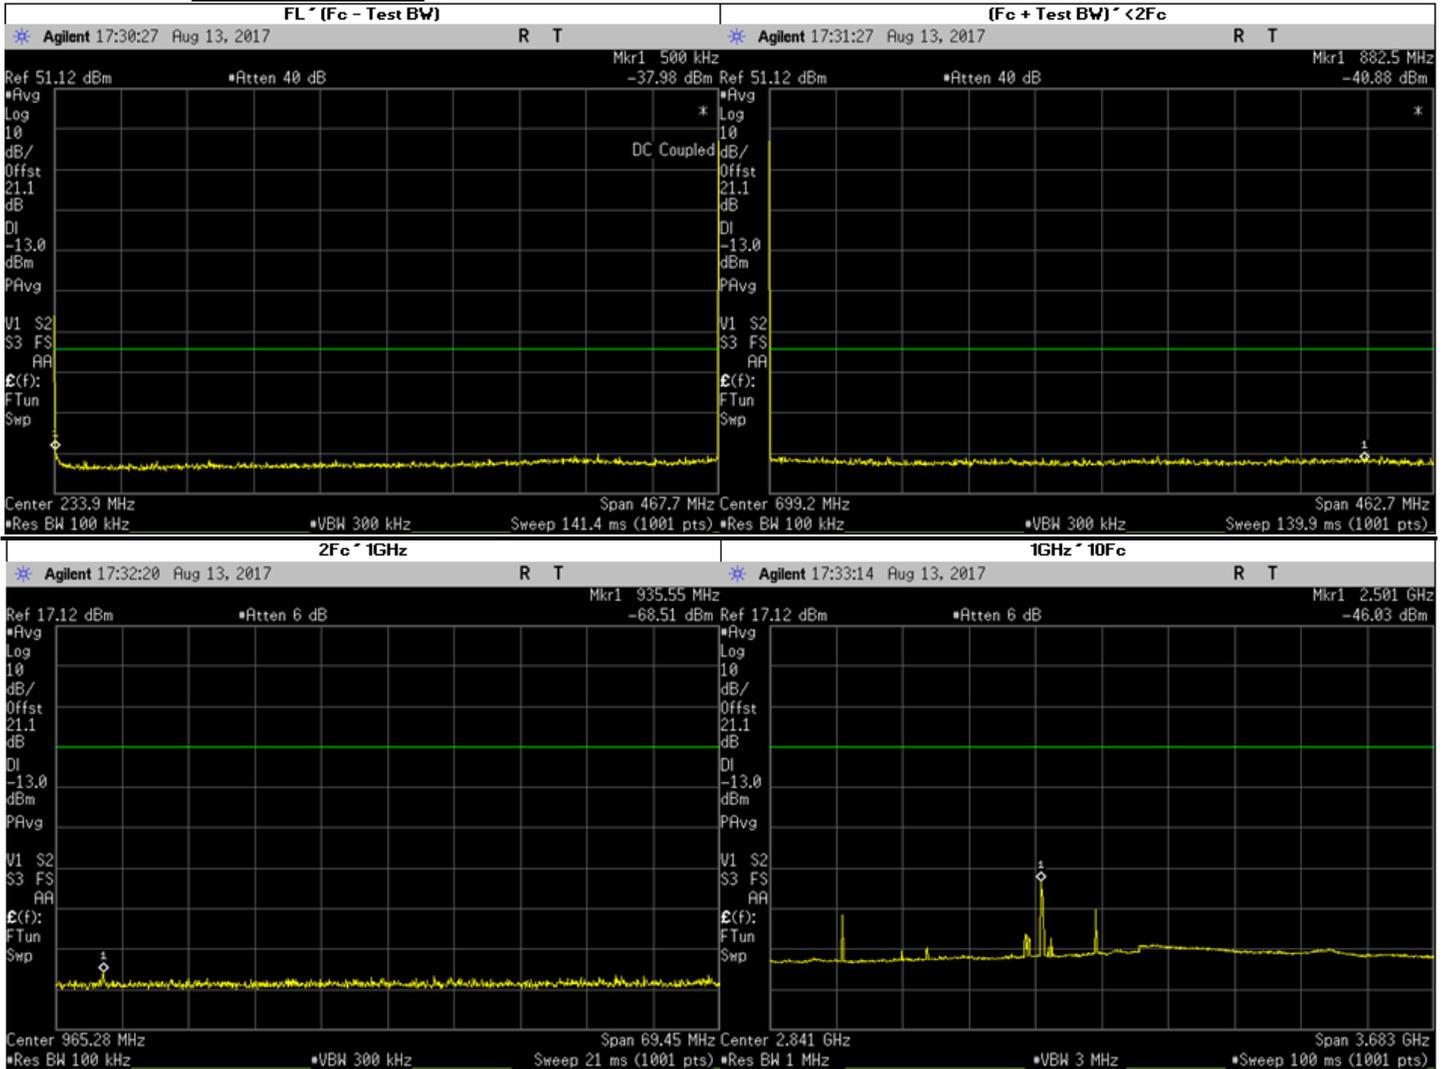


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4762	-37.98	-13	PASS
(Fc-Test BW) ~ 1GHz	882.4754	-39.45	-13	PASS
1GHz ~ 2Fc	935.5500	-68.51	-13	PASS
2Fc ~ 10Fc	2501.0610	-46.03	-13	PASS
	1401.0190	-54.73	-13	PASS
	2802.7450	-56.27	-13	PASS
	2416.4420	-59.24	-13	PASS
	2434.8380	-59.80	-13	PASS
	1403.3250	-54.53	-13	PASS
	1871.1000	-62.56	-13	PASS
	2338.8750	-64.17	-13	PASS
	2806.6500	-53.69	-13	PASS
	3274.4250	-62.42	-13	PASS
	3742.2000	-63.64	-13	PASS
	4209.9750	-64.11	-13	PASS
4677.7500	-64.71	-13	PASS	

Analog: 459.025 MHz, 25 kHz Channel Spacing, Max Power
Part 22

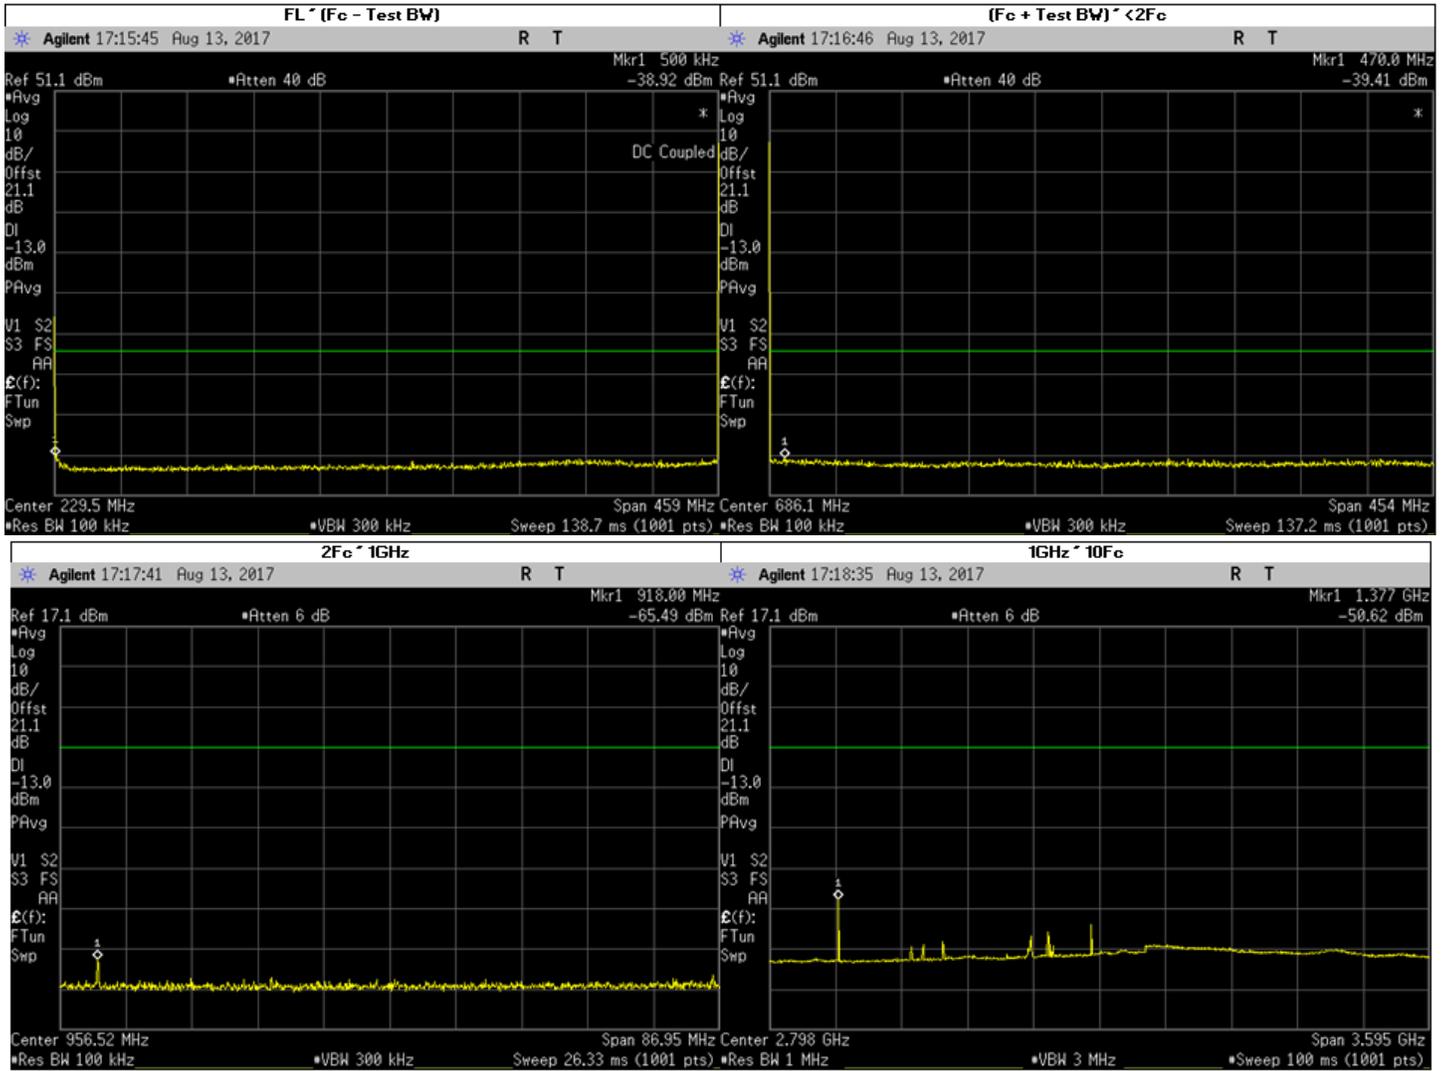

Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4675	-38.92	-13	PASS
(Fc-Test BW) ~ 1GHz	469.9662	-39.41	-13	PASS
1GHz ~ 2Fc	918.0000	-65.49	-13	PASS
2Fc ~ 10Fc	2515.6800	-58.73	-13	PASS
	2422.2970	-59.59	-13	PASS
	1944.6060	-60.85	-13	PASS
	3165.7700	-61.70	-13	PASS
	3093.9370	-61.76	-13	PASS
	1377.0750	-50.82	-13	PASS
	1836.1000	-62.06	-13	PASS
	2295.1250	-64.74	-13	PASS
	2754.1500	-59.78	-13	PASS
	3213.1750	-62.27	-13	PASS
	3672.2000	-63.72	-13	PASS
	4131.2250	-63.41	-13	PASS
	4590.2500	-64.78	-13	PASS


Analog: 459.65 MHz, 25 kHz Channel Spacing, Max Power
Part 22

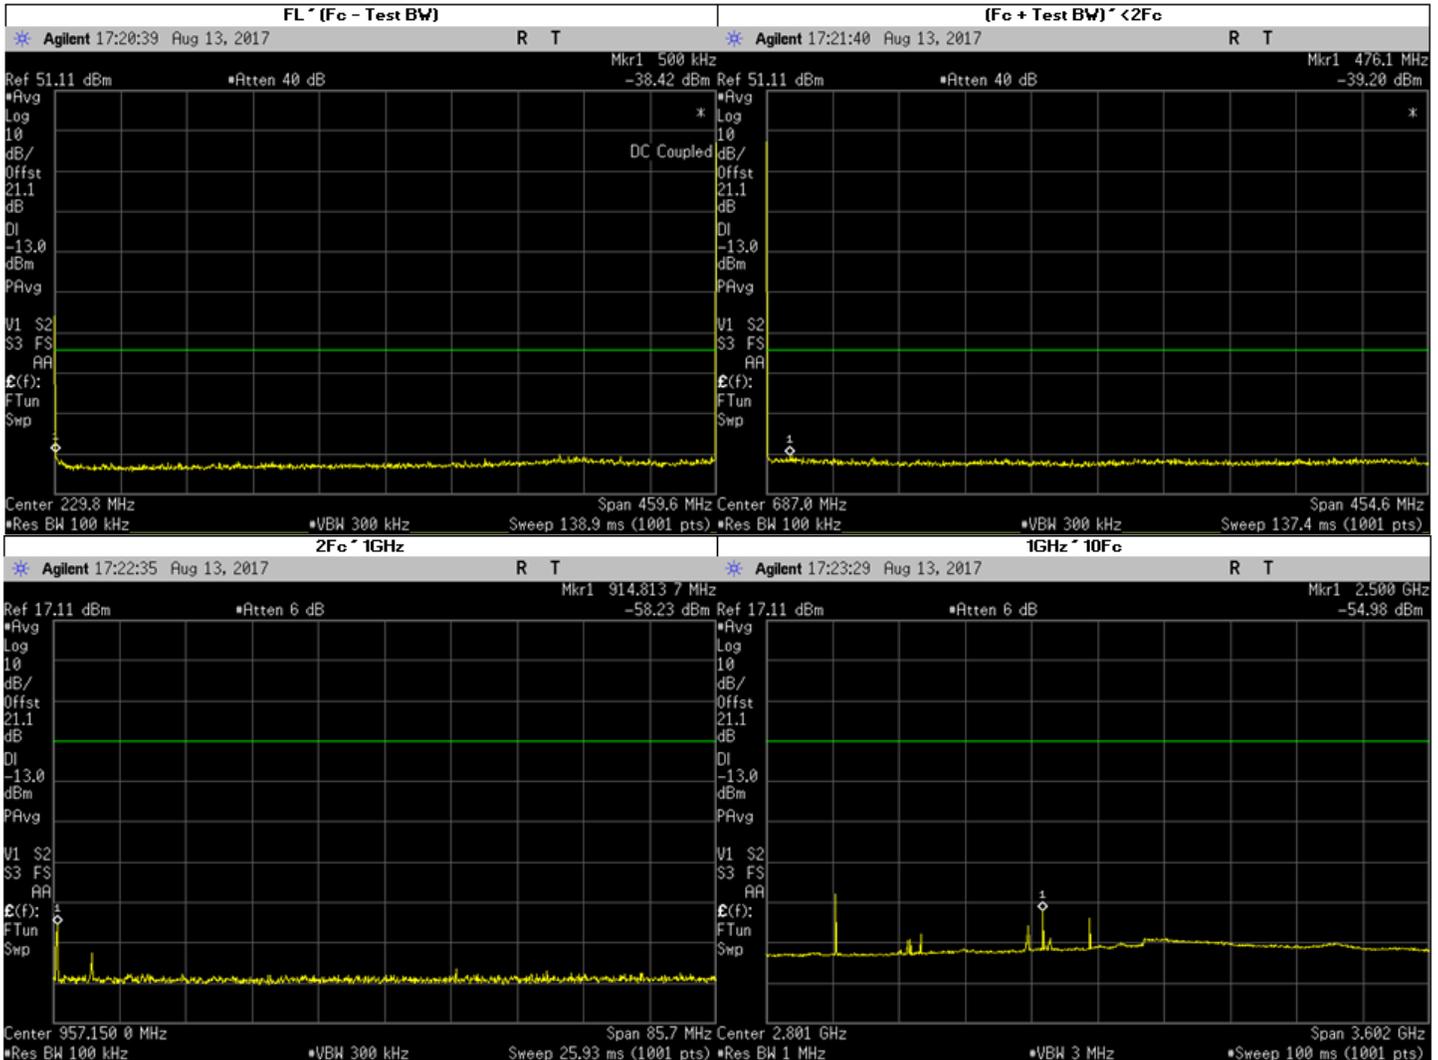

Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	0.4681	-38.42	-13	PASS
(Fc-Test BW) ~ 1GHz	476.0558	-39.20	-13	PASS
1GHz ~ 2Fc	918.0000	-65.49	-13	PASS
2Fc ~ 10Fc	2500.3250	-54.98	-13	PASS
	2755.7760	-56.77	-13	PASS
	2421.1710	-58.68	-13	PASS
	3054.4020	-61.73	-13	PASS
	3119.1640	-61.83	-13	PASS
	1378.9500	-55.42	-13	PASS
	1838.6000	-61.11	-13	PASS
	2298.2500	-64.90	-13	PASS
	2757.9000	-61.17	-13	PASS
	3217.5500	-62.25	-13	PASS
	3677.2000	-63.65	-13	PASS
	4136.8500	-63.46	-13	PASS
	4596.5000	-64.84	-13	PASS


Test Result (Digital)

Digital: 406.2 MHz, 12.5 kHz Channel Spacing, Max Power
Part 90, RSS-119

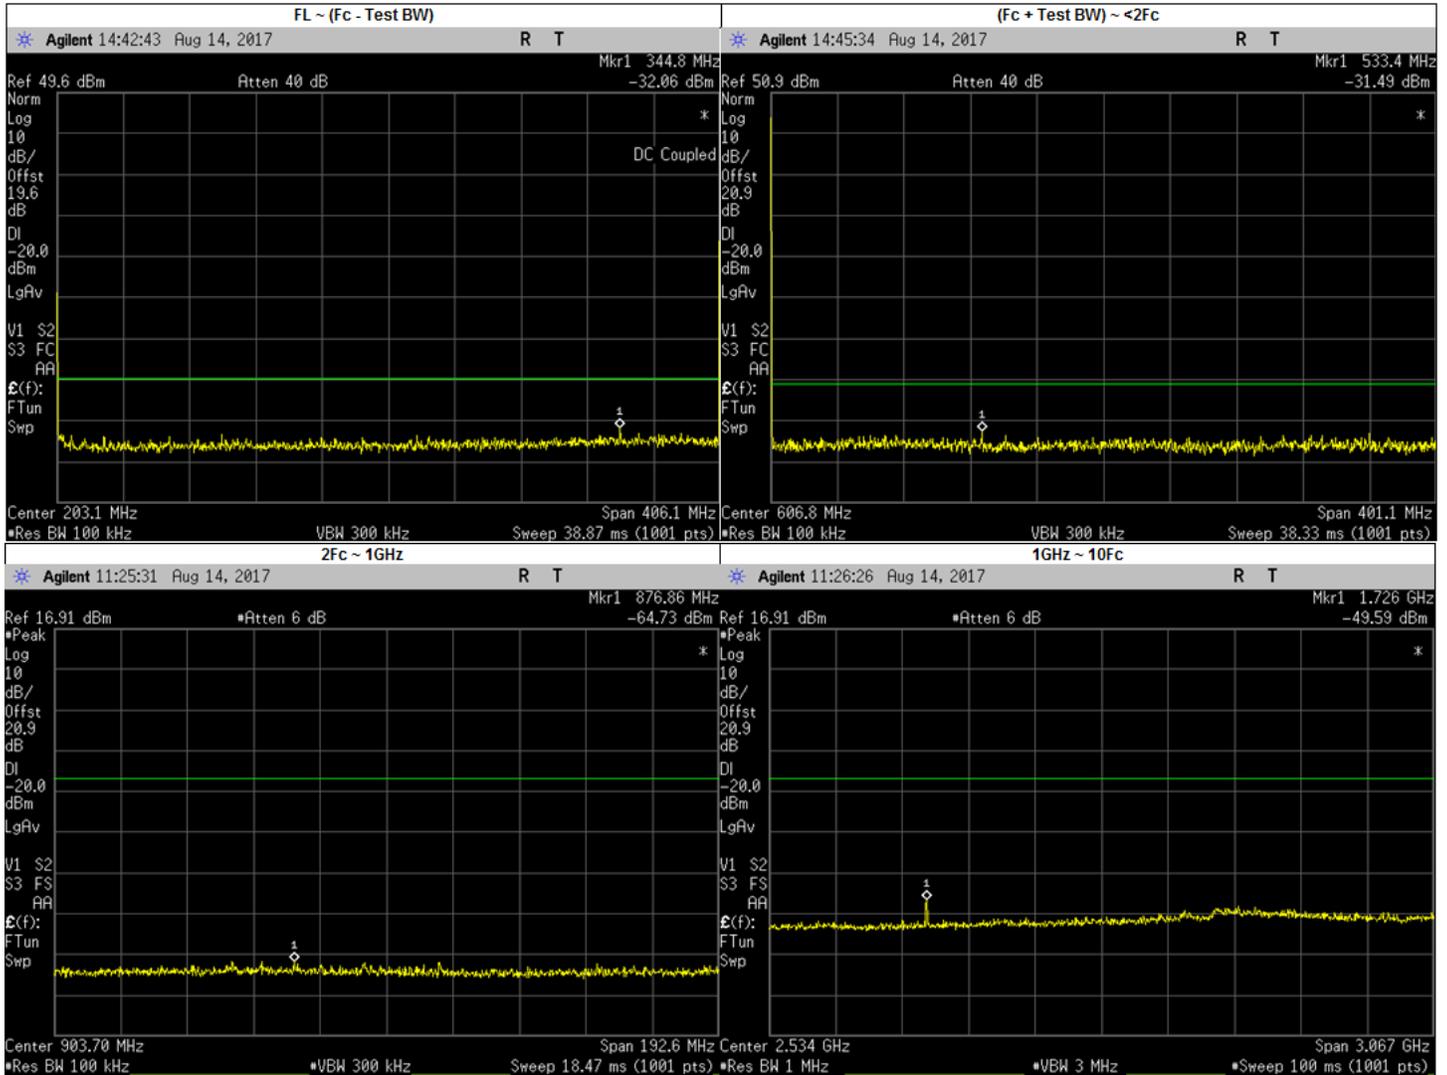


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Remark
FL ~ (Fc - Test BW)	8.6220	-33.48	-20	PASS
	28.9270	-33.69	-20	PASS
	41.1100	-33.85	-20	PASS
	89.8420	-34.07	-20	PASS
	288.8310	-34.13	-20	PASS
(Fc + Test BW) ~ <2Fc	533.3987	-31.49	-20	PASS
	767.2400	-32.08	-20	PASS
	547.8383	-32.61	-20	PASS
	475.2392	-32.63	-20	PASS
	715.0970	-32.65	-20	PASS
2Fc ~ 1GHz	876.8591	-64.73	-20	PASS
	858.9652	-64.77	-20	PASS
	867.4312	-64.87	-20	PASS
	897.2543	-65.04	-20	PASS
	918.9964	-65.05	-20	PASS
1GHz ~ 10Fc	812.4000	-68.39	-20	PASS
	1726.1530	-49.59	-20	PASS
	3163.1390	-51.26	-20	PASS
	3239.7370	-51.49	-20	PASS
	3058.9650	-51.68	-20	PASS
	3098.7960	-51.76	-20	PASS
	1218.6000	-55.85	-20	PASS
	1624.8000	-55.87	-20	PASS
	2031.0000	-55.64	-20	PASS
	2437.2000	-55.80	-20	PASS
	2843.4000	-54.66	-20	PASS
	3249.6000	-52.95	-20	PASS
3655.8000	-53.87	-20	PASS	
4062.0000	-54.11	-20	PASS	

Digital: 450.65 MHz, 12.5 kHz Channel Spacing, Max Power
Part 74, RSS-119

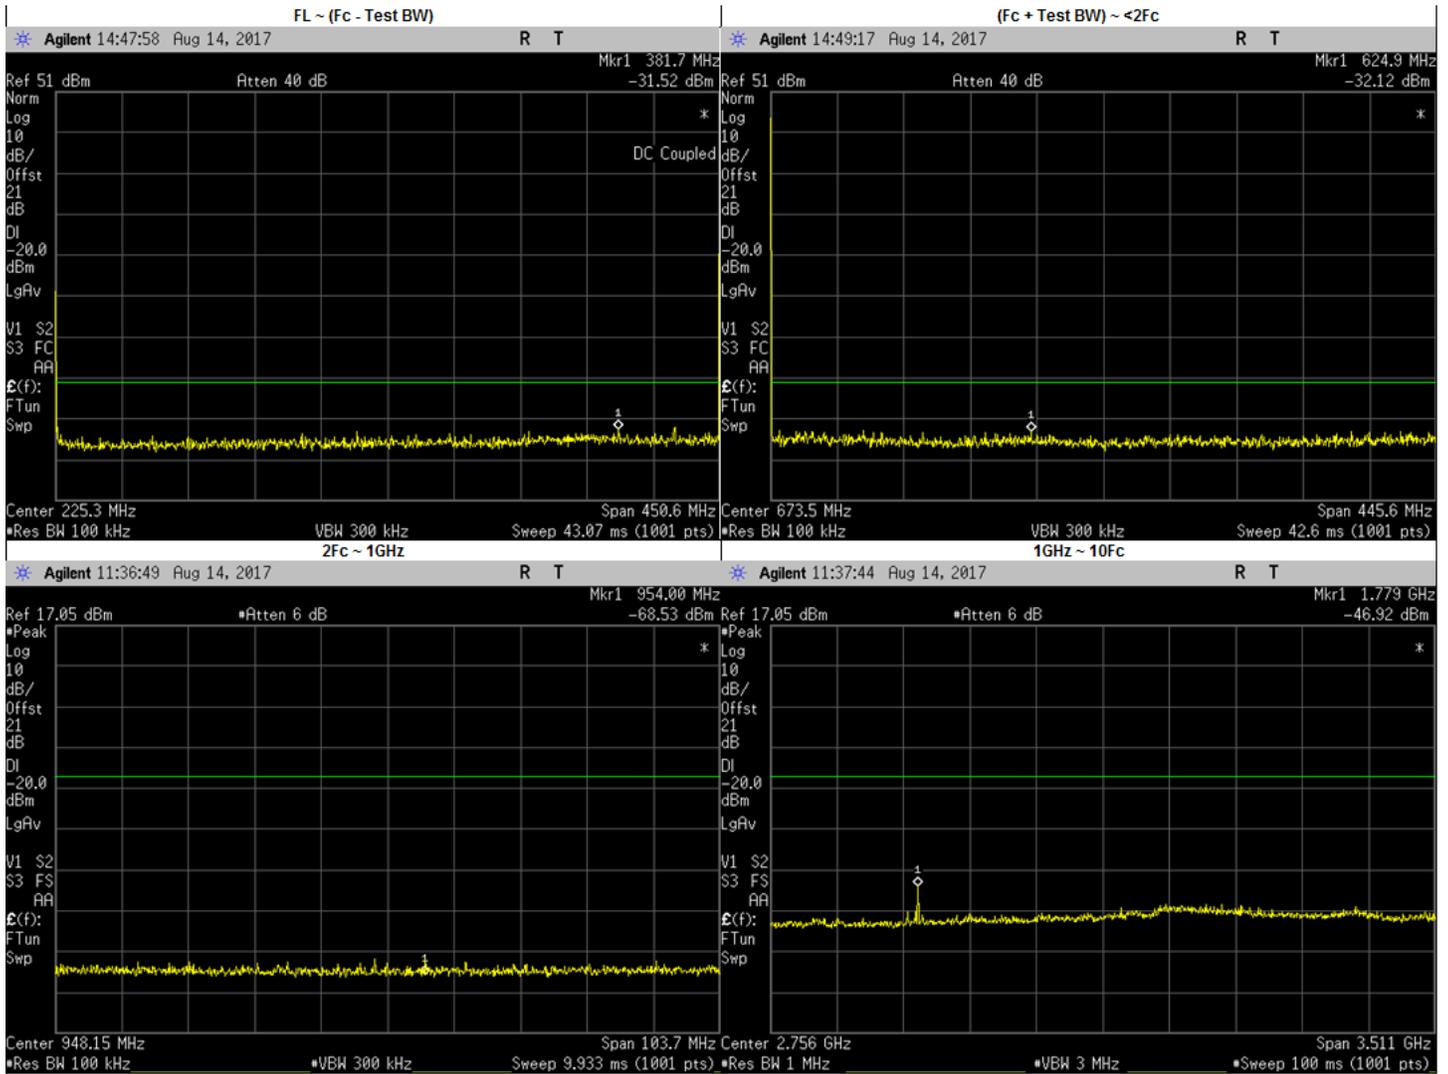


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	450.1494	-31.06	-20	PASS
	419.9592	-31.10	-20	PASS
	419.5086	-31.28	-20	PASS
	381.6582	-31.53	-20	PASS
	204.5724	-31.90	-20	PASS
(Fc-Test BW) ~ 1GHz	456.4928	-31.81	-20	PASS
	513.0840	-31.85	-20	PASS
	456.9384	-31.94	-20	PASS
	839.2632	-31.94	-20	PASS
	872.6832	-31.95	-20	PASS
1GHz ~ 2Fc	954.0000	-68.53	-20	PASS
2Fc ~ 10Fc	1778.7740	-46.92	-20	PASS
	3381.9270	-51.41	-20	PASS
	3301.2430	-51.48	-20	PASS
	3087.2550	-51.48	-20	PASS
	3480.1500	-51.49	-20	PASS
	1351.9500	-55.14	-20	PASS
	1802.6000	-54.21	-20	PASS
	2253.2500	-55.59	-20	PASS
	2703.9000	-55.00	-20	PASS
	3154.5500	-52.77	-20	PASS
	3605.2000	-53.69	-20	PASS
	4055.8500	-53.72	-20	PASS
	4506.5000	-54.47	-20	PASS

**Digital: 459.125 MHz, 12.5 kHz Channel Spacing, Max Power
 Part 90, Part 22**

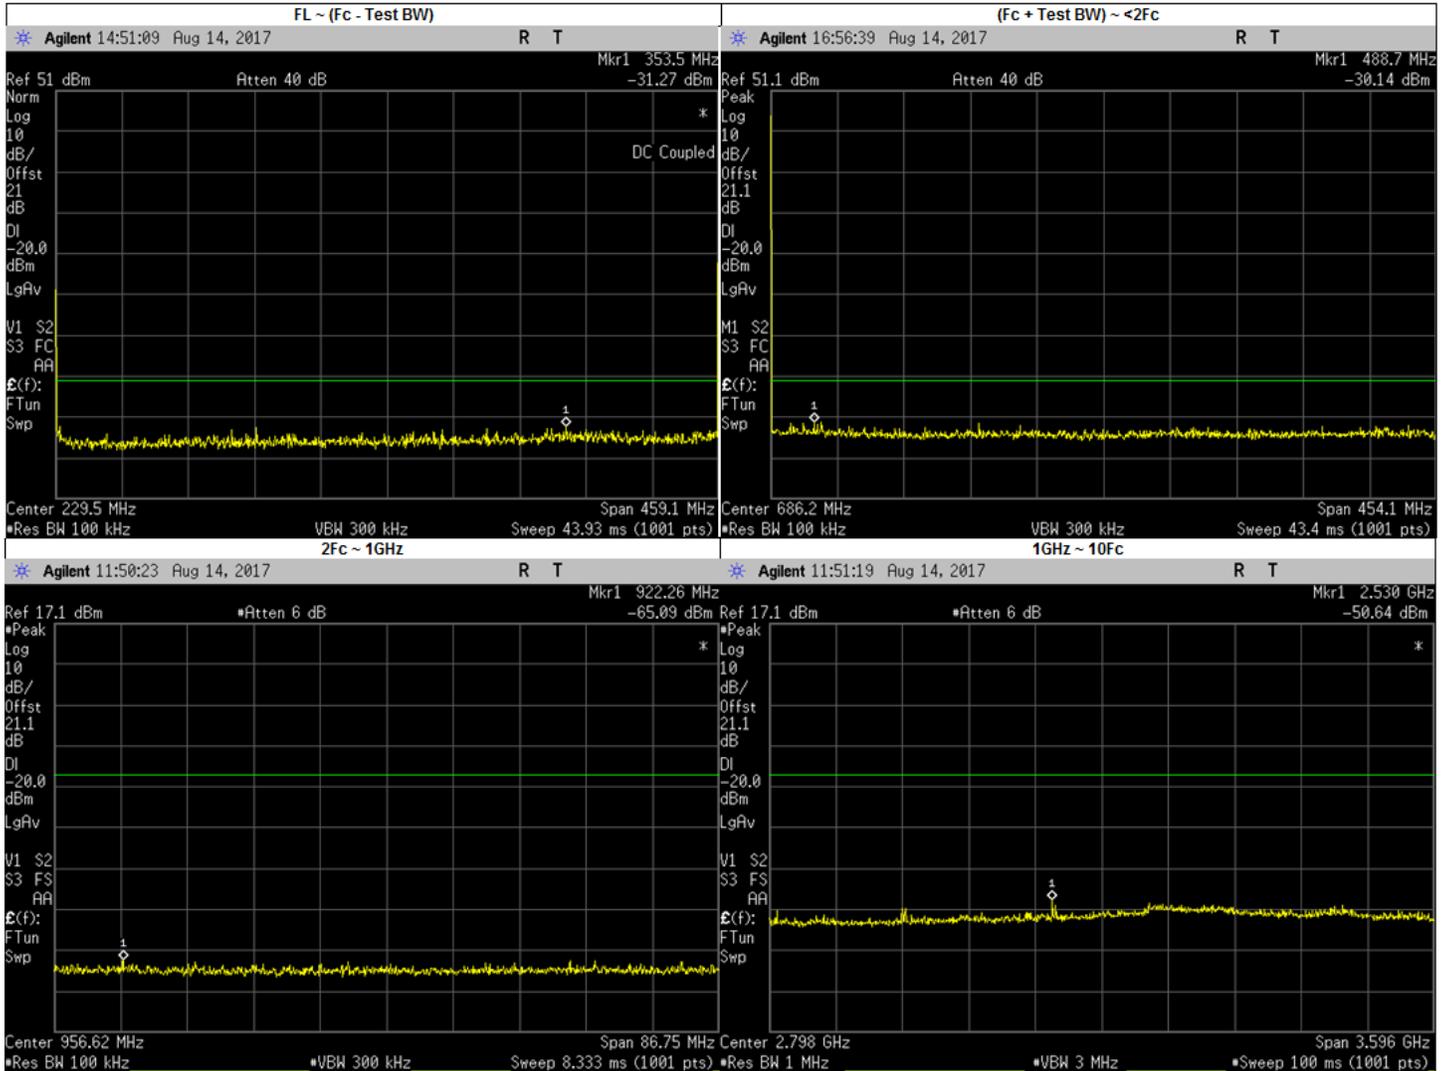


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	458.5909	-31.18	-20	PASS
	353.4570	-31.27	-20	PASS
	139.0573	-31.34	-20	PASS
	298.8241	-31.39	-20	PASS
	343.3568	-31.64	-20	PASS
(Fc-Test BW) ~ 1GHz	488.6665	-30.14	-20	PASS
	493.6616	-30.22	-20	PASS
	472.7730	-30.23	-20	PASS
	481.4009	-30.37	-20	PASS
	601.2833	-30.44	-20	PASS
1GHz ~ 2Fc	922.2600	-65.09	-20	PASS
2Fc ~ 10Fc	2530.4720	-50.64	-20	PASS
	3051.4070	-51.31	-20	PASS
	3123.2600	-51.50	-20	PASS
	3101.7040	-51.72	-20	PASS
	3112.4830	-51.77	-20	PASS
	1377.3750	-56.26	-20	PASS
	1836.5000	-54.61	-20	PASS
	2295.6250	-55.53	-20	PASS
	2754.7500	-54.56	-20	PASS
	3213.8750	-52.23	-20	PASS
	3673.0000	-53.80	-20	PASS
	4132.1250	-53.86	-20	PASS
	4591.2500	-55.56	-20	PASS

**Digital: 467.775 MHz, 12.5 kHz Channel Spacing, Max Power
 Part 90, RSS-119**

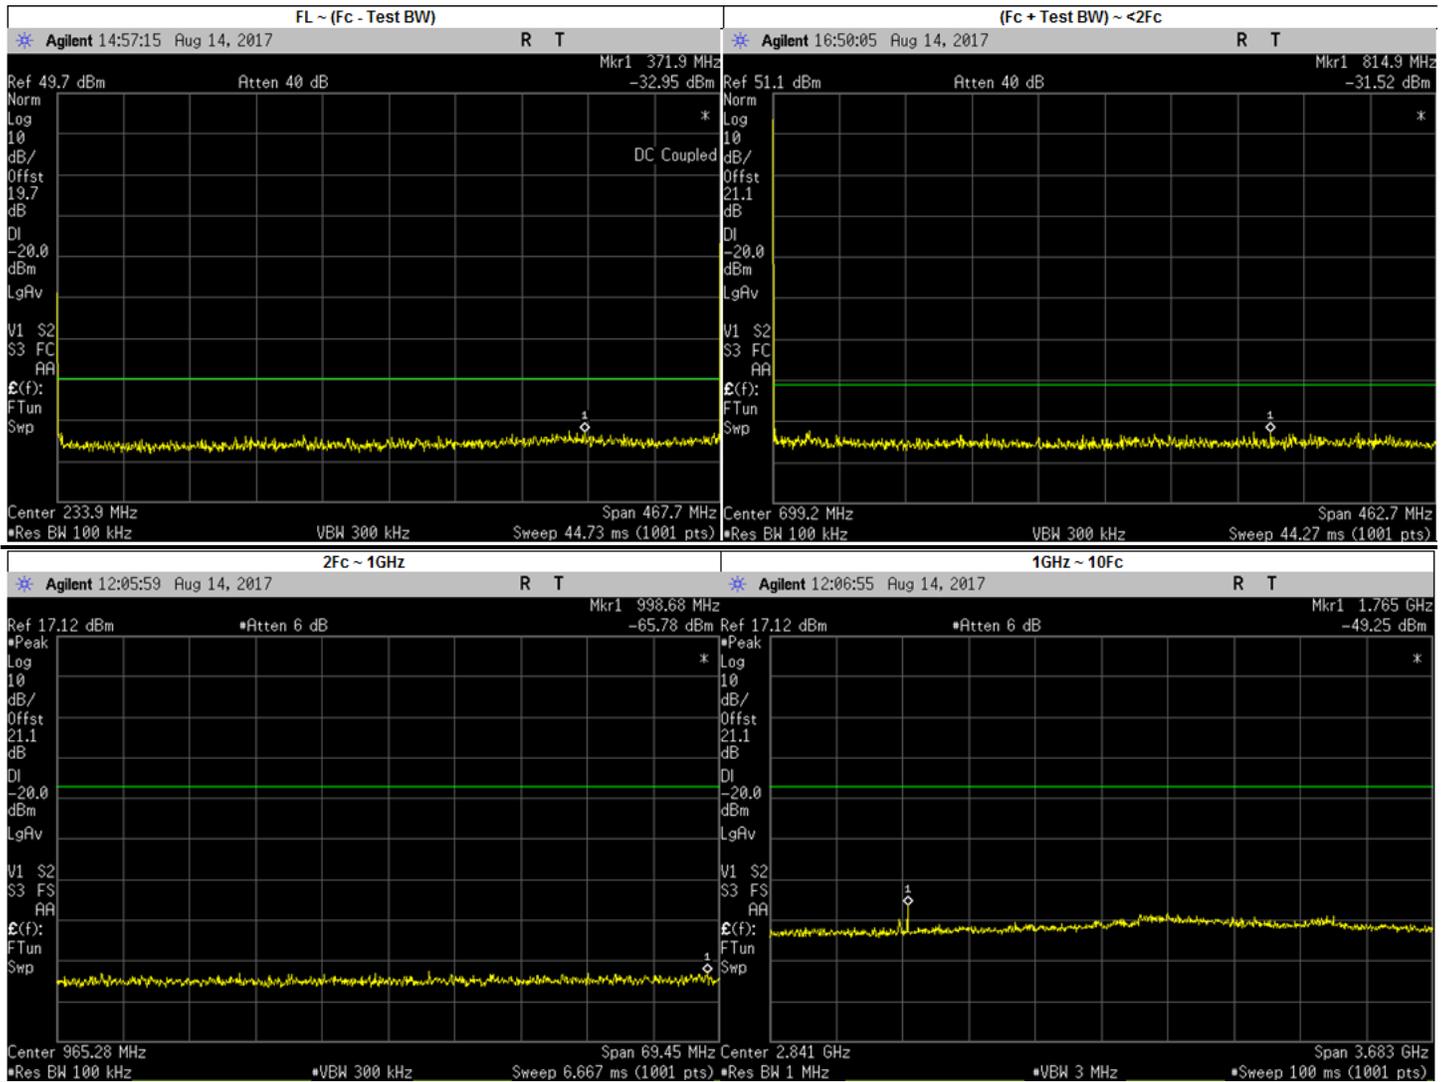


Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	911.4336	-32.49	-20	PASS
	361.1144	-32.92	-20	PASS
	371.8715	-32.95	-20	PASS
	910.9795	-33.20	-20	PASS
	0.5177	-33.21	-20	PASS
(Fc-Test BW) ~ 1GHz	493.2985	-31.24	-20	PASS
	814.8750	-31.52	-20	PASS
	803.3075	-31.53	-20	PASS
	491.9104	-31.61	-20	PASS
	876.4141	-31.64	-20	PASS
1GHz ~ 2Fc	998.6800	-65.78	-20	PASS
2Fc ~ 10Fc	1765.2470	-49.25	-20	PASS
	3207.4430	-51.14	-20	PASS
	3056.6010	-51.48	-20	PASS
	3262.6290	-51.49	-20	PASS
	3111.7870	-51.59	-20	PASS
	1403.3250	-55.72	-20	PASS
	1871.1000	-55.16	-20	PASS
	2338.8750	-55.36	-20	PASS
	2806.6500	-54.39	-20	PASS
	3274.4250	-53.21	-20	PASS
	3742.2000	-53.44	-20	PASS
	4209.9750	-54.57	-20	PASS
	4677.7500	-55.11	-20	PASS

Digital: 459.025 MHz, 12.5 kHz Channel Spacing, Max Power
Part 22

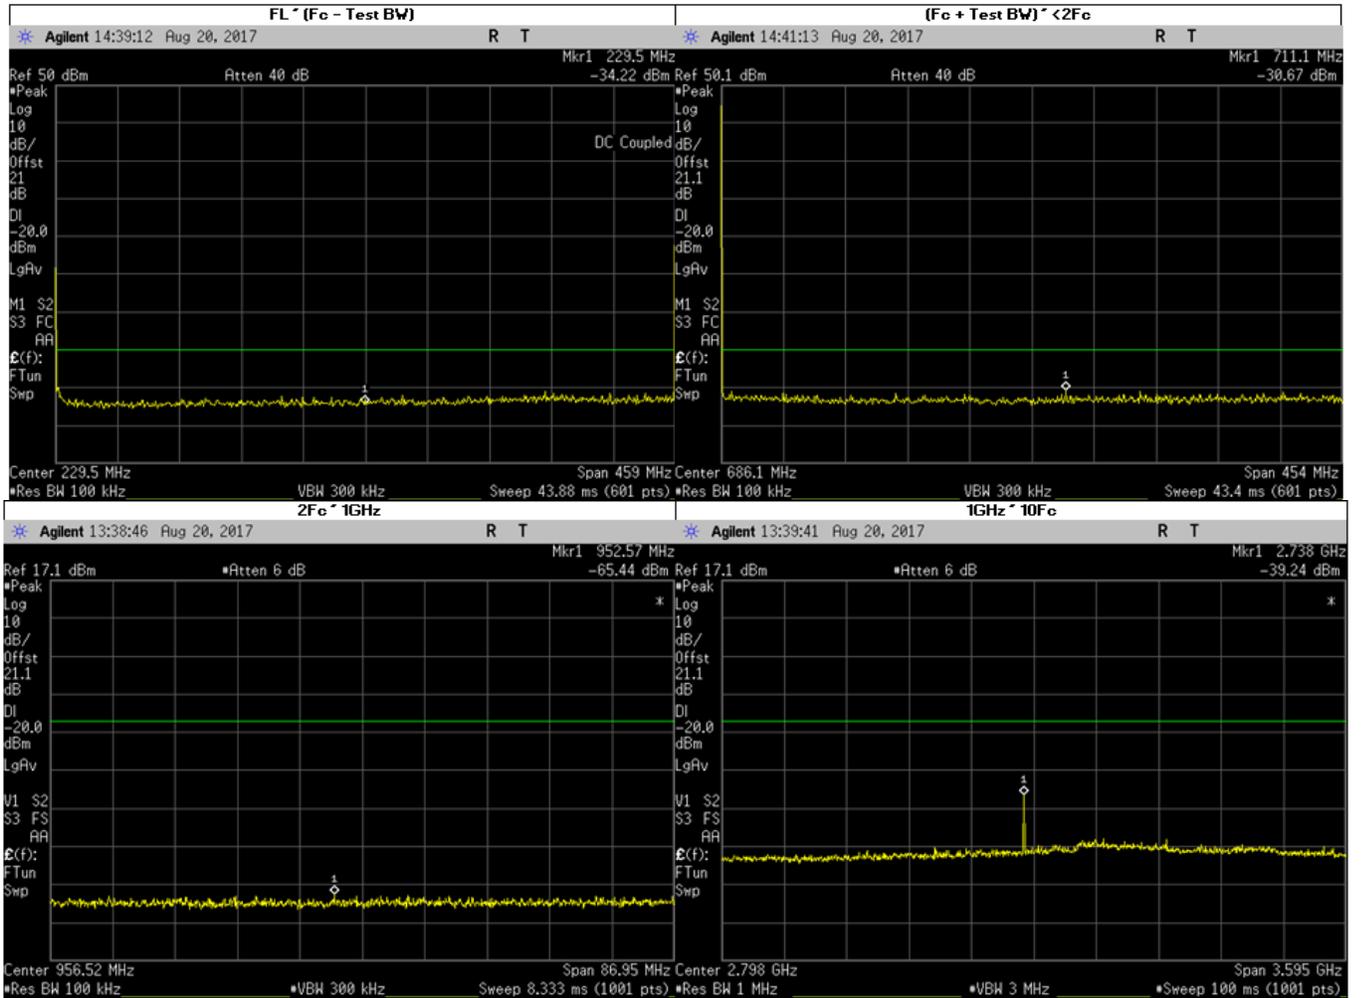

Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	266.9870	-34.02	-20	PASS
	91.0275	-34.02	-20	PASS
	117.0389	-34.02	-20	PASS
	200.4284	-34.02	-20	PASS
	157.5861	-34.01	-20	PASS
(Fc-Test BW) ~ 1GHz	711.0700	-30.67	-20	PASS
	459.8567	-30.67	-20	PASS
	466.6667	-30.76	-20	PASS
	764.7933	-30.93	-20	PASS
	869.9700	-31.17	-20	PASS
1GHz ~ 2Fc	998.6800	-65.78	-20	PASS
2Fc ~ 10Fc	3194.5030	-50.85	-20	PASS
	3151.4030	-51.04	-20	PASS
	3557.2610	-51.16	-20	PASS
	3075.9790	-51.32	-20	PASS
	1377.0750	-55.77	-20	PASS
	1836.1000	-54.17	-20	PASS
	2295.1250	-54.66	-20	PASS
	2754.1500	-54.18	-20	PASS
	3213.1750	-52.37	-20	PASS
	3672.2000	-53.98	-20	PASS
	4131.2250	-53.52	-20	PASS
	4590.2500	-55.14	-20	PASS
	2738.3630	-41.42	-20	PASS

Digital: 459.65 MHz, 12.5 kHz Channel Spacing, Max Power
Part 22

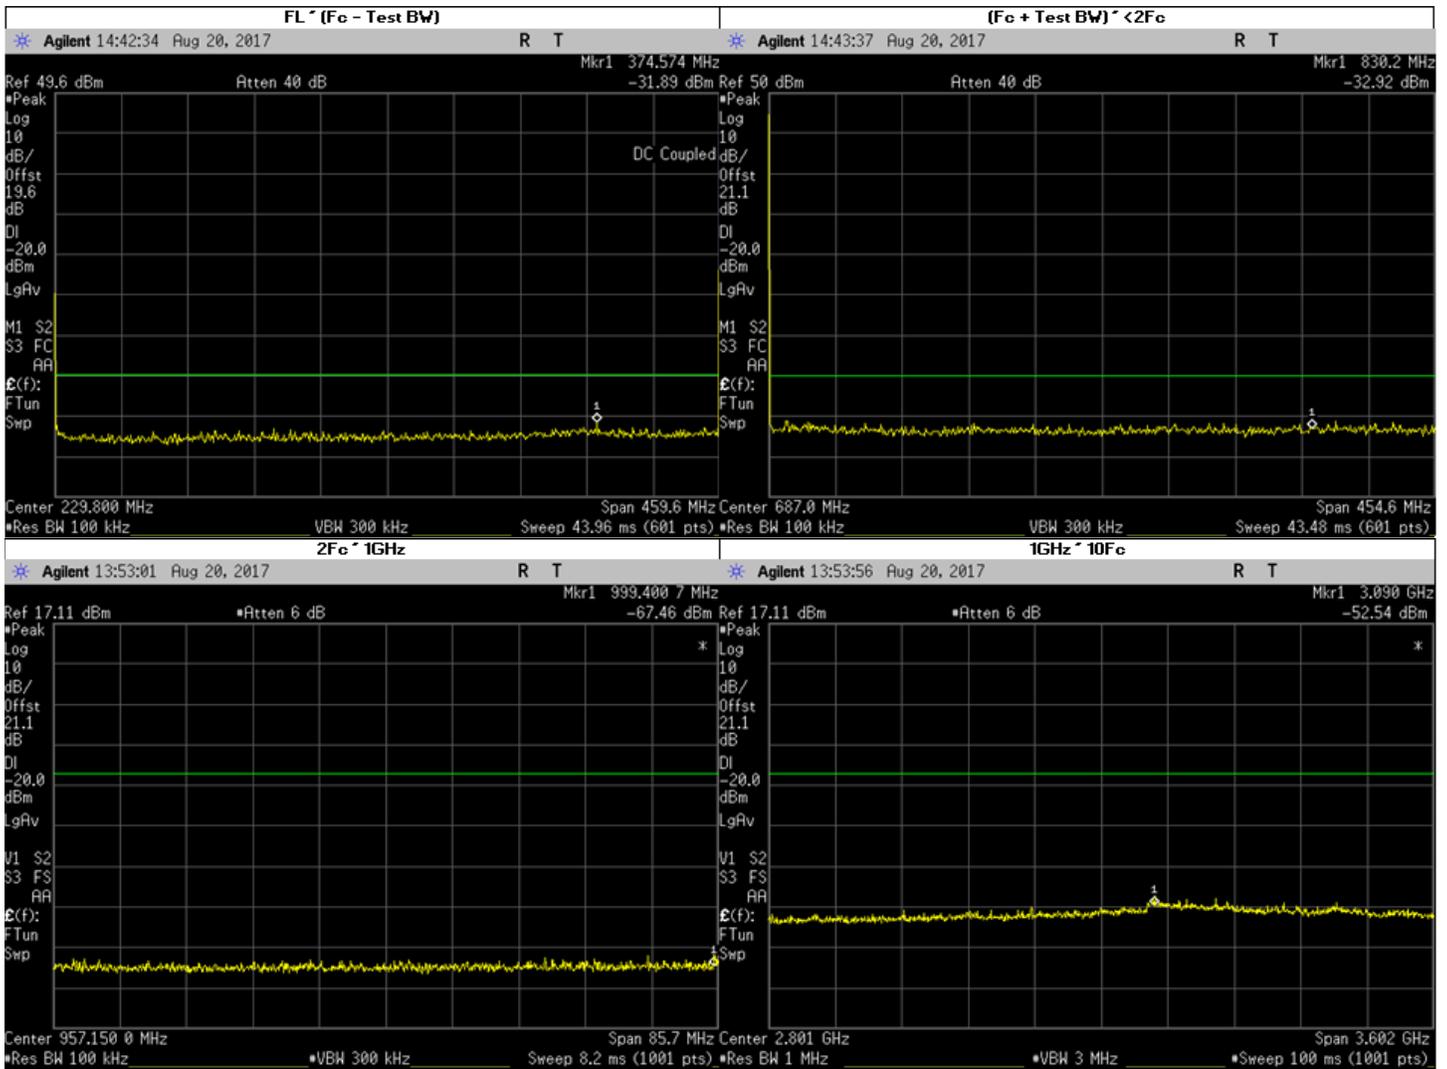

Frequency Range	Highest Spur Freq (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Remark
9kHz ~ (Fc-Test BW)	374.5740	-31.89	-20	PASS
	1.5320	-32.52	-20	PASS
	0.7660	-32.63	-20	PASS
	364.6160	-32.72	-20	PASS
	414.4060	-32.83	-20	PASS
(Fc-Test BW) ~ 1GHz	599.8683	-31.76	-20	PASS
	769.5857	-31.78	-20	PASS
	873.3860	-31.83	-20	PASS
	487.7337	-31.84	-20	PASS
	460.4577	-31.93	-20	PASS
1GHz ~ 2Fc	998.6800	-65.78	-20	PASS
2Fc ~ 10Fc	3090.3810	-50.33	-20	PASS
	3421.3880	-50.77	-20	PASS
	3083.1850	-50.82	-20	PASS
	3259.4830	-51.05	-20	PASS
	3219.9060	-51.23	-20	PASS
	1378.9500	-55.24	-20	PASS
	1838.6000	-54.61	-20	PASS
	2298.2500	-55.04	-20	PASS
	2757.9000	-54.52	-20	PASS
	3217.5500	-52.40	-20	PASS
	3677.2000	-53.59	-20	PASS
	4136.8500	-53.83	-20	PASS
	4596.5000	-55.17	-20	PASS


6.10.3. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	

6.11. Radiated Spurious Emission

6.11.1. Test Setup

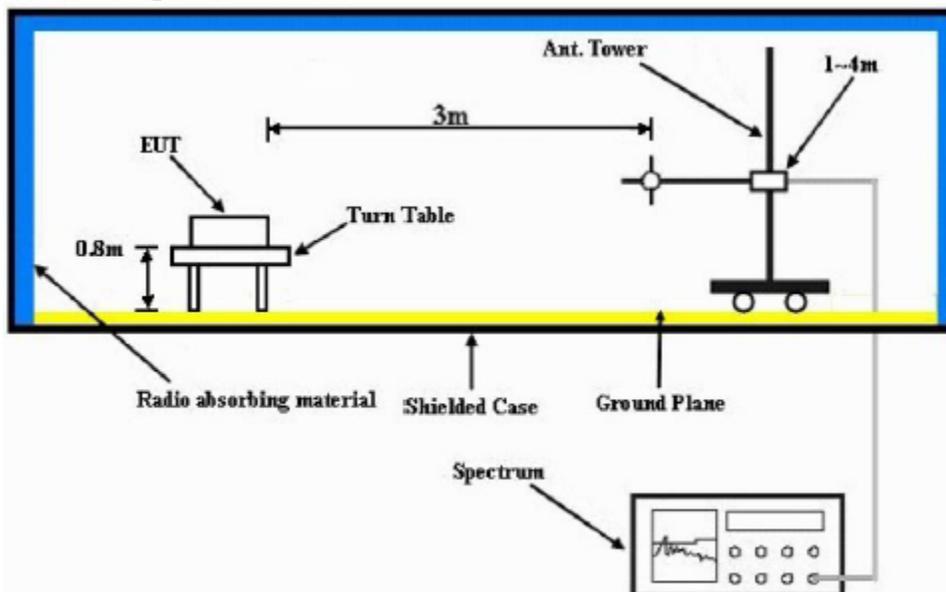

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1 MHz, VBW = 3 MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.11.2. Test Result (Analog)

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641
 Accy Part No: 690-RMN5127C-3, HKN4192

SR:09083-EMC-00002


406.200000 MHz

Test Mode: TX Analog
 25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-83.7292 **	-82.9160 **
1218.6000	-13.0000	-59.9241 **	-58.5195 **
1624.8000	-13.0000	-58.6655 **	-57.4798 **
2031.0000	-13.0000	-51.6500 *	-51.6700 *
2437.2000	-13.0000	-55.1140 **	-56.4609 **
2843.4000	-13.0000	-56.4688 **	-55.1602 **
3249.6000	-13.0000	-52.8963 **	-51.3077 **
3655.8000	-13.0000	-53.3446 **	-52.4783 **
4062.0000	-13.0000	-51.4548 **	-52.2015 **

RADIATED SPURIOUS EMISSIONS

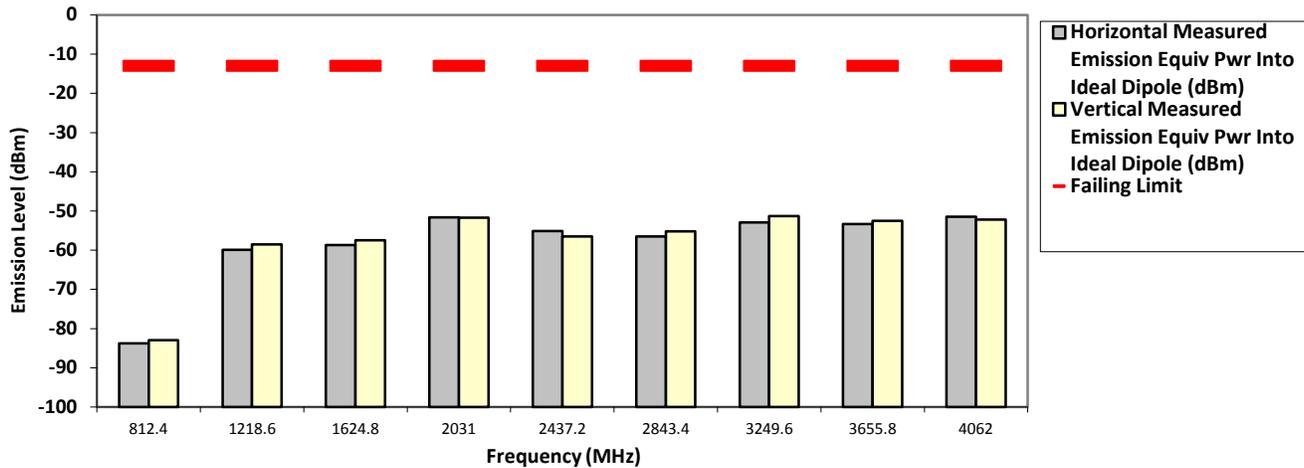

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


450.650000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-84.0171 **	-82.6536 **
1351.9500	-13.0000	-58.6811 **	-59.0072 **
1802.6000	-13.0000	-56.7722 **	-58.4279 **
2253.2500	-13.0000	-56.8345 **	-57.6867 **
2703.9000	-13.0000	-54.4424 **	-54.6848 **
3154.5500	-13.0000	-46.7200 *	-45.8600 *
3605.2000	-13.0000	-53.5421 **	-53.8125 **
4055.8500	-13.0000	-51.4002 **	-50.6785 **
4506.5000	-13.0000	-49.4463 **	-50.5693 **

RADIATED SPURIOUS EMISSIONS

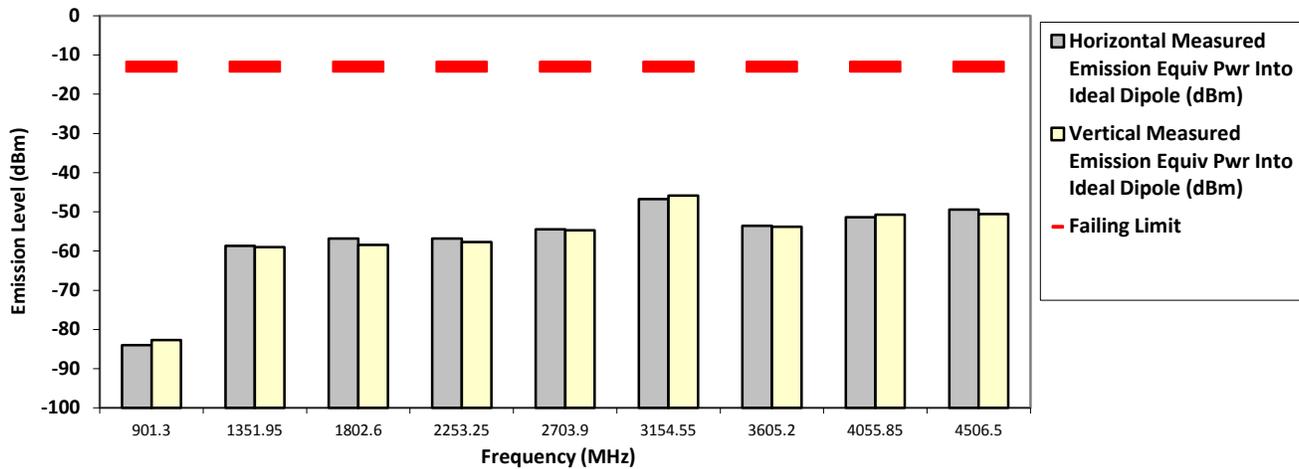

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


459.125000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-84.2786 **	-83.6484 **
1377.3750	-13.0000	-60.8411 **	-60.2053 **
1836.5000	-13.0000	-53.5200 *	-54.6400 *
2295.6250	-13.0000	-55.3268 **	-55.6574 **
2754.7500	-13.0000	-54.8165 **	-54.7475 **
3213.8750	-13.0000	-51.5404 **	-52.1158 **
3673.0000	-13.0000	-52.7107 **	-53.6215 **
4132.1250	-13.0000	-52.6067 **	-51.4914 **
4591.2500	-13.0000	-50.3087 **	-49.2389 **

RADIATED SPURIOUS EMISSIONS

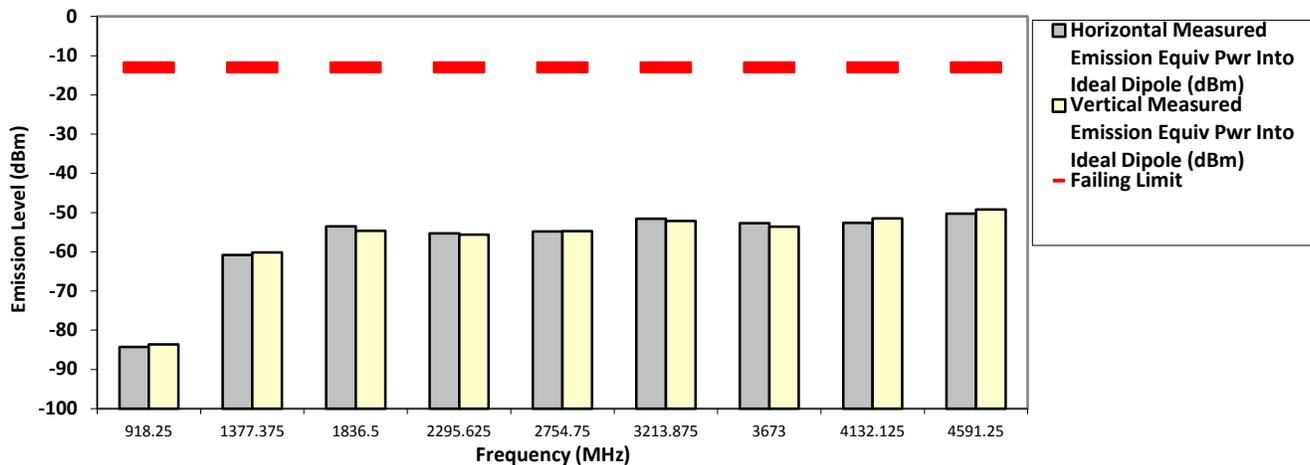

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


467.775000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-83.0486 **	-83.1158 **
1403.3250	-13.0000	-61.2387 **	-60.0702 **
1871.1000	-13.0000	-53.9461 **	-55.7626 **
2338.8750	-13.0000	-55.8125 **	-56.7756 **
2806.6500	-13.0000	-55.8300 **	-54.9902 **
3274.4250	-13.0000	-52.5188 **	-52.7701 **
3742.2000	-13.0000	-53.0886 **	-53.5062 **
4209.9750	-13.0000	-52.2764 **	-52.2923 **
4677.7500	-13.0000	-50.8372 **	-49.2116 **

RADIATED SPURIOUS EMISSIONS

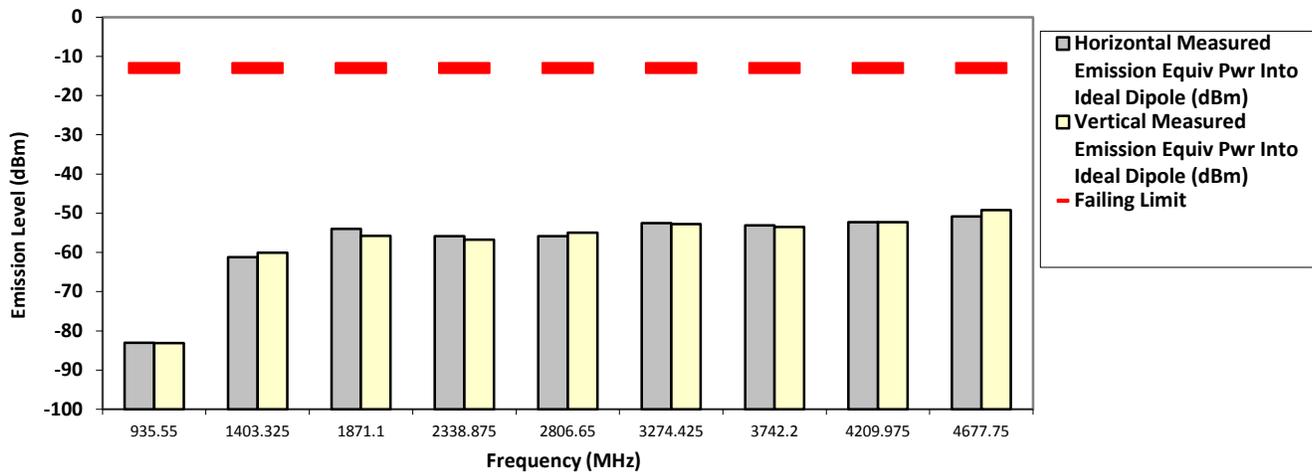

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


406.200000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-83.7292 **	-82.9160 **
1218.6000	-13.0000	-59.9241 **	-58.5195 **
1624.8000	-13.0000	-58.6655 **	-57.4798 **
2031.0000	-13.0000	-52.8200 *	-46.4900 *
2437.2000	-13.0000	-55.1140 **	-56.4609 **
2843.4000	-13.0000	-56.4688 **	-55.1602 **
3249.6000	-13.0000	-52.8963 **	-51.3077 **
3655.8000	-13.0000	-53.3446 **	-52.4783 **
4062.0000	-13.0000	-51.4548 **	-52.2015 **

RADIATED SPURIOUS EMISSIONS

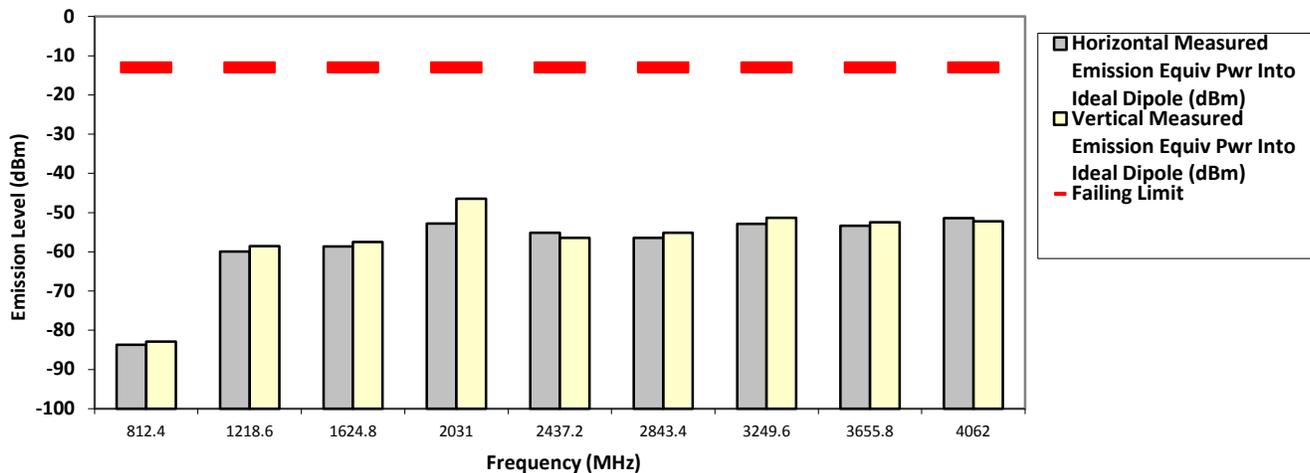

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


450.650000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-84.0171 **	-82.6536 **
1351.9500	-13.0000	-58.6811 **	-59.0072 **
1802.6000	-13.0000	-56.7722 **	-58.4279 **
2253.2500	-13.0000	-56.8345 **	-57.6867 **
2703.9000	-13.0000	-54.4424 **	-54.6848 **
3154.5500	-13.0000	-47.3700 *	-45.8100 *
3605.2000	-13.0000	-53.5421 **	-53.8125 **
4055.8500	-13.0000	-51.4002 **	-50.6785 **
4506.5000	-13.0000	-49.4463 **	-50.5693 **

RADIATED SPURIOUS EMISSIONS

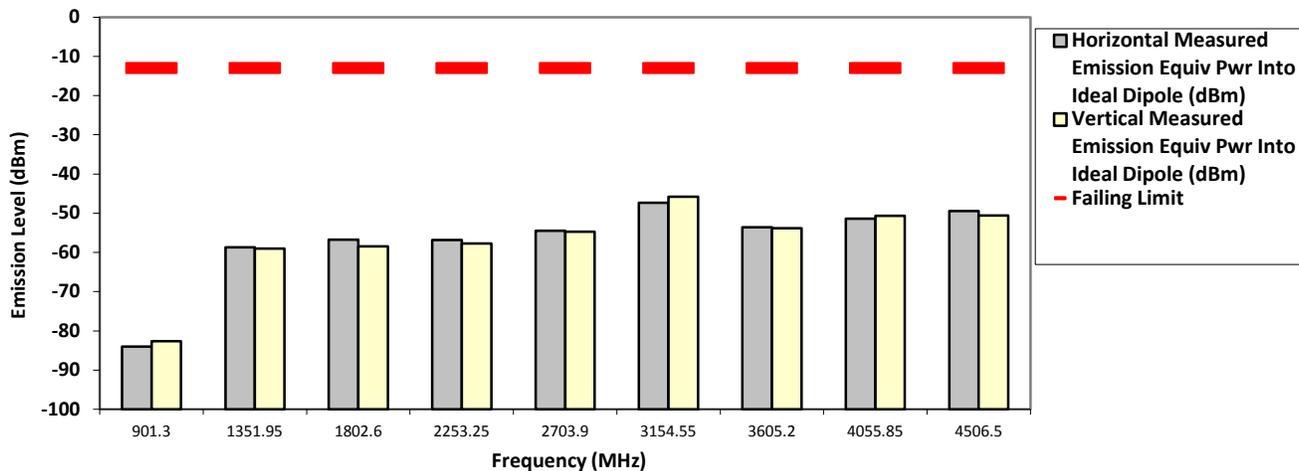

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX Analog


467.775000 MHz

25 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-83.0486 **	-83.1158 **
1403.3250	-13.0000	-61.2387 **	-60.0702 **
1871.1000	-13.0000	-53.9461 **	-55.7626 **
2338.8750	-13.0000	-55.8125 **	-56.7756 **
2806.6500	-13.0000	-55.8300 **	-54.9902 **
3274.4250	-13.0000	-52.5188 **	-52.7701 **
3742.2000	-13.0000	-53.0886 **	-53.5062 **
4209.9750	-13.0000	-52.2764 **	-52.2923 **
4677.7500	-13.0000	-50.8372 **	-49.2116 **

RADIATED SPURIOUS EMISSIONS

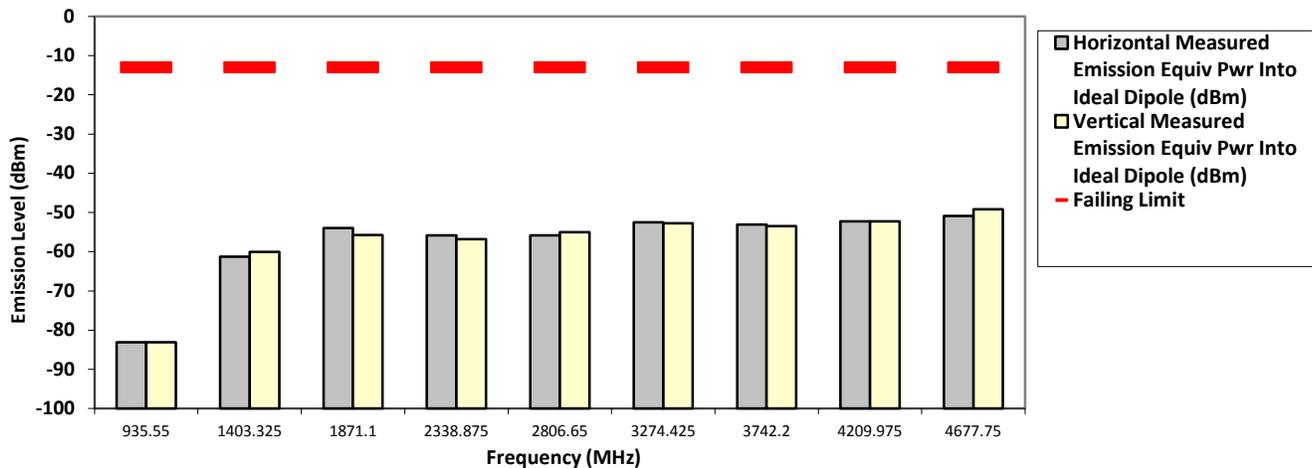

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641
 Accy Part No: 690-RMN5127C-3, HKN4192

SR:09083-EMC-00002


406.200000 MHz

Test Mode: TX PCR Digital 4FSK
 12.5 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-83.1801 **	-84.3414 **
1218.6000	-20.0000	-59.4182 **	-59.5025 **
1624.8000	-20.0000	-60.1565 **	-58.8862 **
2031.0000	-20.0000	-53.1800 *	-52.7300 *
2437.2000	-20.0000	-55.4561 **	-55.3709 **
2843.4000	-20.0000	-55.1456 **	-55.2751 **
3249.6000	-20.0000	-52.3736 **	-52.1526 **
3655.8000	-20.0000	-53.0401 **	-53.7833 **
4062.0000	-20.0000	-52.2017 **	-50.9699 **

RADIATED SPURIOUS EMISSIONS

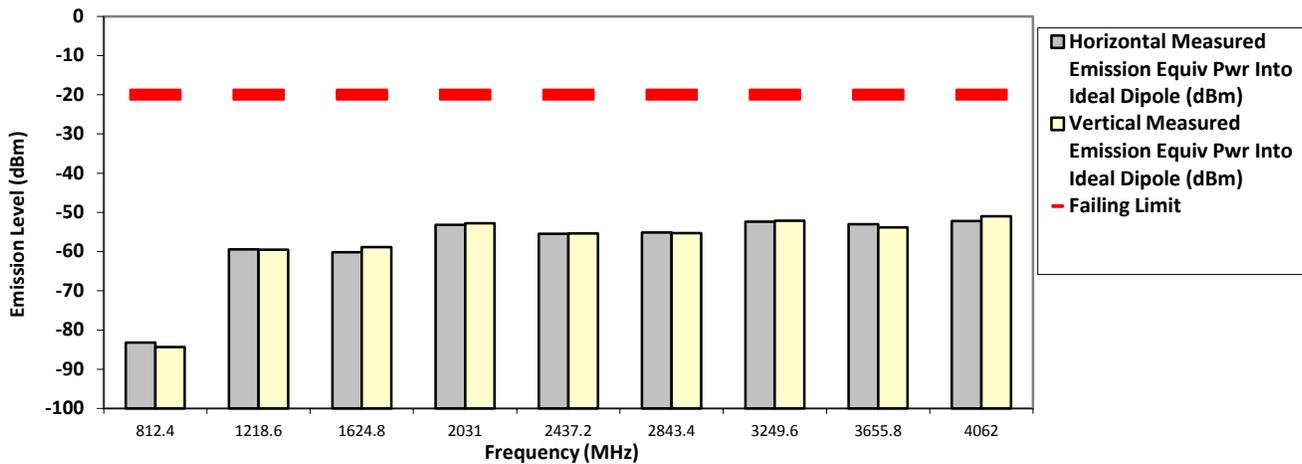

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641
 Accy Part No: 690-RMN5127C-3, HKN4192

SR:09083-EMC-00002


Test Mode: TX PCR Digital 4FSK
 12.5 kHz

450.650000 MHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-84.4259 **	-84.3757 **
1351.9500	-20.0000	-58.7261 **	-58.5930 **
1802.6000	-20.0000	-56.8524 **	-59.0671 **
2253.2500	-20.0000	-55.8098 **	-56.3140 **
2703.9000	-20.0000	-55.2110 **	-55.6715 **
3154.5500	-20.0000	-46.9900 *	-45.5800 *
3605.2000	-20.0000	-52.8341 **	-53.9396 **
4055.8500	-20.0000	-51.2945 **	-51.9001 **
4506.5000	-20.0000	-50.6311 **	-50.5676 **

RADIATED SPURIOUS EMISSIONS

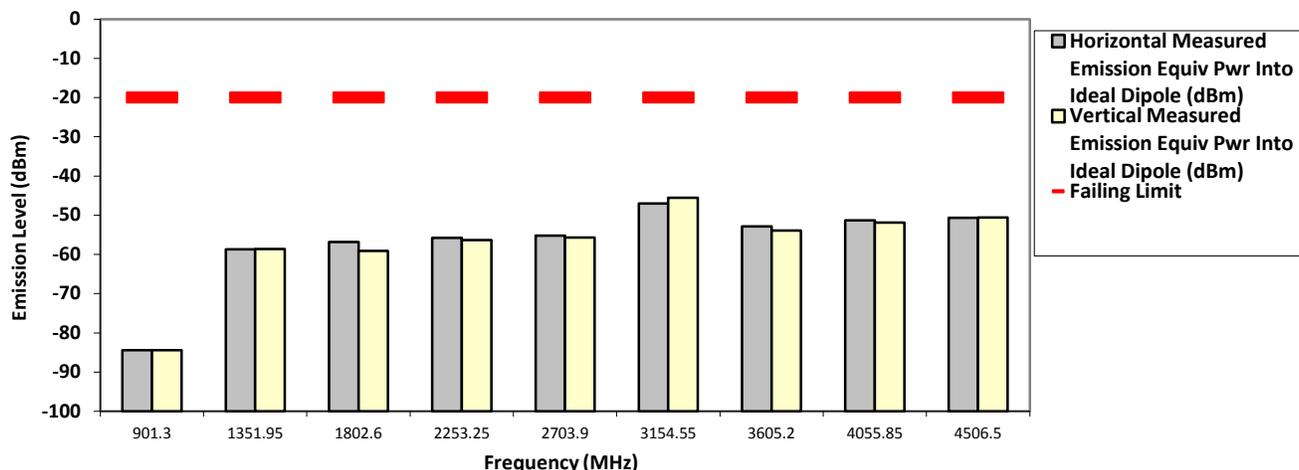

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192


Test Mode: TX PCR Digital 4FSK

459.125000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-84.8292 **	-83.8927 **
1377.3750	-20.0000	-58.9870 **	-59.3532 **
1836.5000	-20.0000	-54.4766 **	-57.9931 **
2295.6250	-20.0000	-55.1491 **	-57.5377 **
2754.7500	-20.0000	-54.9139 **	-54.1586 **
3213.8750	-20.0000	-52.3922 **	-51.8186 **
3673.0000	-20.0000	-53.1098 **	-53.0211 **
4132.1250	-20.0000	-51.8433 **	-51.4335 **
4591.2500	-20.0000	-49.6592 **	-50.7549 **

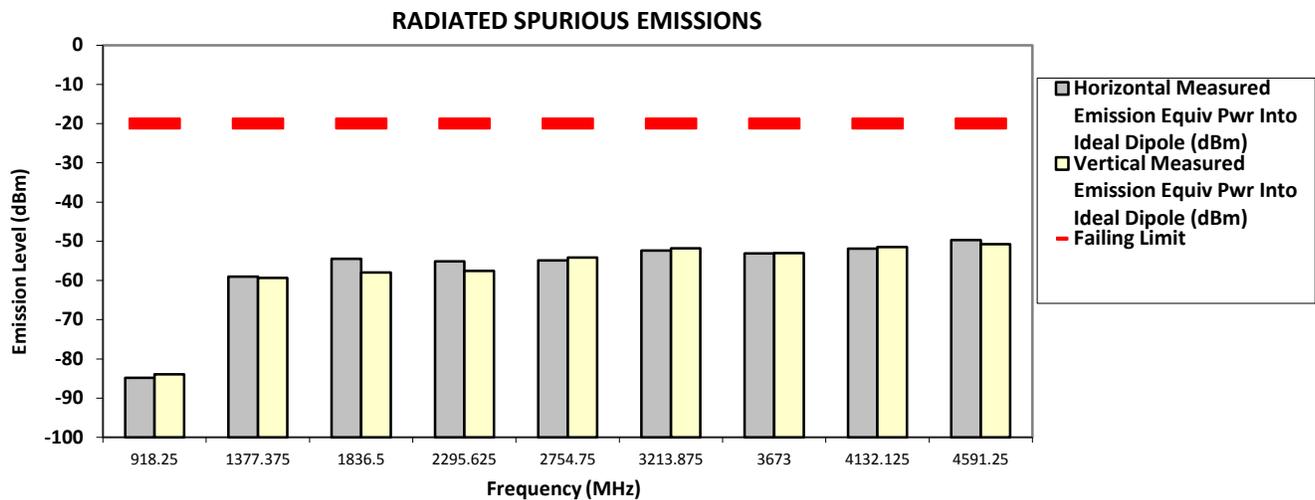

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX PCR Digital 4FSK


467.775000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.0760 **	-83.3755 **
1403.3250	-20.0000	-60.4002 **	-61.3771 **
1871.1000	-20.0000	-55.2381 **	-56.5898 **
2338.8750	-20.0000	-55.3300 **	-57.0661 **
2806.6500	-20.0000	-55.5540 **	-54.9048 **
3274.4250	-20.0000	-52.7548 **	-53.2790 **
3742.2000	-20.0000	-51.8814 **	-52.6534 **
4209.9750	-20.0000	-50.9845 **	-51.3860 **
4677.7500	-20.0000	-49.9319 **	-50.3645 **

RADIATED SPURIOUS EMISSIONS

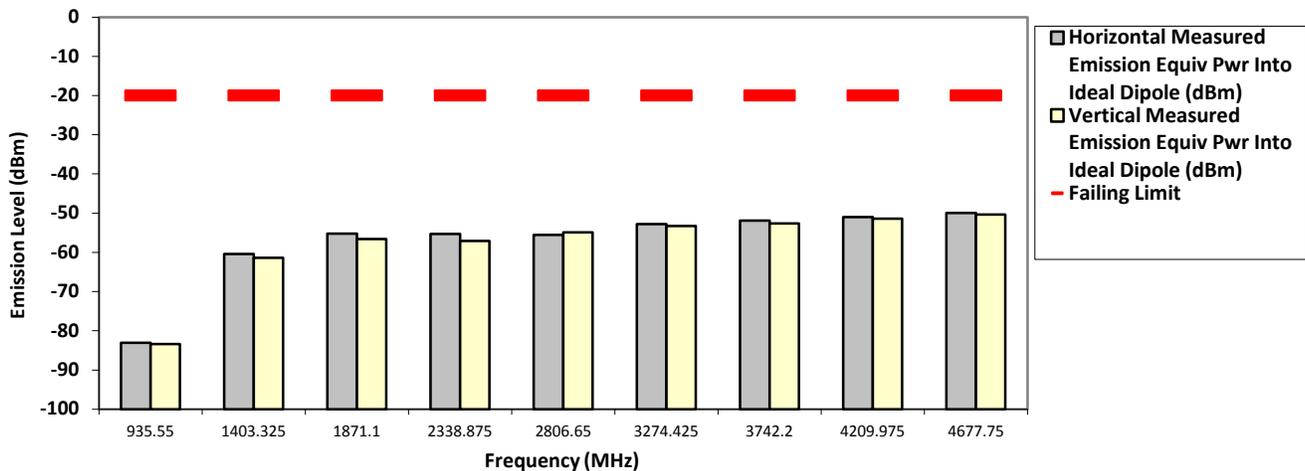

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641
 Accy Part No: 690-RMN5127C-3, HKN4192

SR:09083-EMC-00002


Test Mode: TX PCR Digital 4FSK
 12.5 kHz

406.200000 MHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-83.1801 **	-84.3414 **
1218.6000	-20.0000	-59.4182 **	-59.5025 **
1624.8000	-20.0000	-60.1565 **	-58.8862 **
2031.0000	-20.0000	-50.6900 *	-42.9500 *
2437.2000	-20.0000	-55.4561 **	-55.3709 **
2843.4000	-20.0000	-55.1456 **	-55.2751 **
3249.6000	-20.0000	-52.3736 **	-52.1526 **
3655.8000	-20.0000	-53.0401 **	-53.7833 **
4062.0000	-20.0000	-52.2017 **	-50.9699 **

RADIATED SPURIOUS EMISSIONS

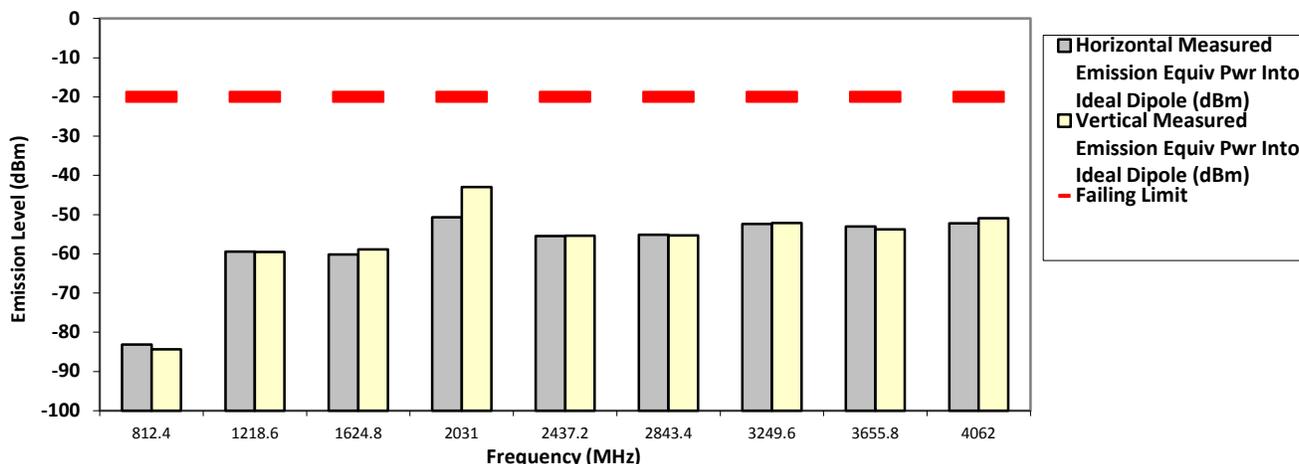

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX PCR Digital 4FSK


450.650000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-84.4259 **	-84.3757 **
1351.9500	-20.0000	-58.7261 **	-58.5930 **
1802.6000	-20.0000	-56.8524 **	-59.0671 **
2253.2500	-20.0000	-55.8098 **	-56.3140 **
2703.9000	-20.0000	-55.2110 **	-55.6715 **
3154.5500	-20.0000	-47.7000 *	-46.7100 *
3605.2000	-20.0000	-52.8341 **	-53.9396 **
4055.8500	-20.0000	-51.2945 **	-51.9001 **
4506.5000	-20.0000	-50.6311 **	-50.5676 **

RADIATED SPURIOUS EMISSIONS

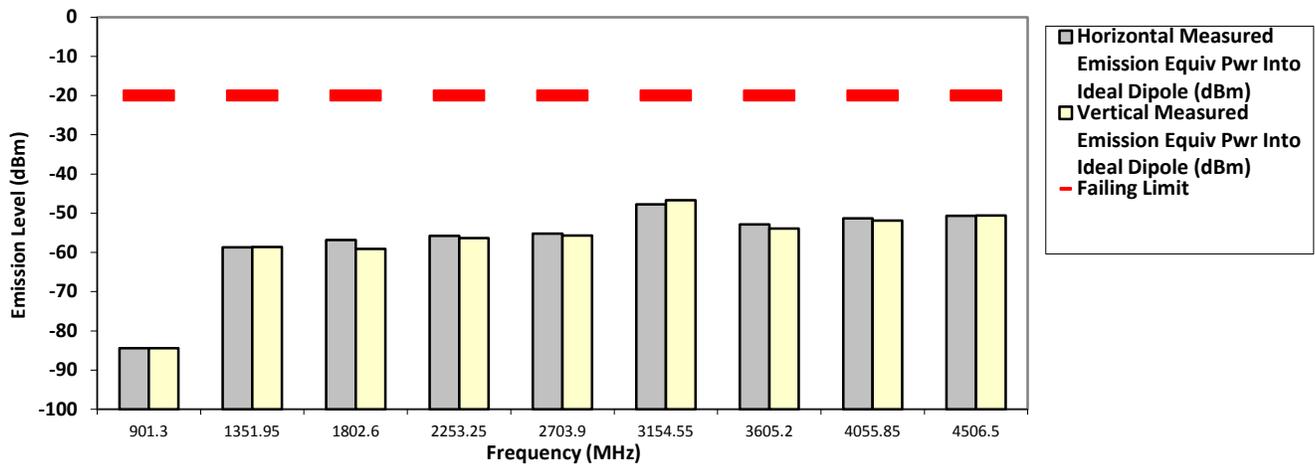

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: AAM28QPN9RA1AN
 Battery Part No: NA

S/N: 511TTP0641

SR:09083-EMC-00002

Accy Part No: 690-RMN5127C-3, HKN4192

Test Mode: TX PCR Digital 4FSK


467.775000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.0760 **	-83.3755 **
1403.3250	-20.0000	-60.4002 **	-61.3771 **
1871.1000	-20.0000	-55.2381 **	-56.5898 **
2338.8750	-20.0000	-55.3300 **	-57.0661 **
2806.6500	-20.0000	-55.5540 **	-54.9048 **
3274.4250	-20.0000	-52.7548 **	-53.2790 **
3742.2000	-20.0000	-51.8814 **	-52.6534 **
4209.9750	-20.0000	-50.9845 **	-51.3860 **
4677.7500	-20.0000	-49.9319 **	-50.3645 **

RADIATED SPURIOUS EMISSIONS

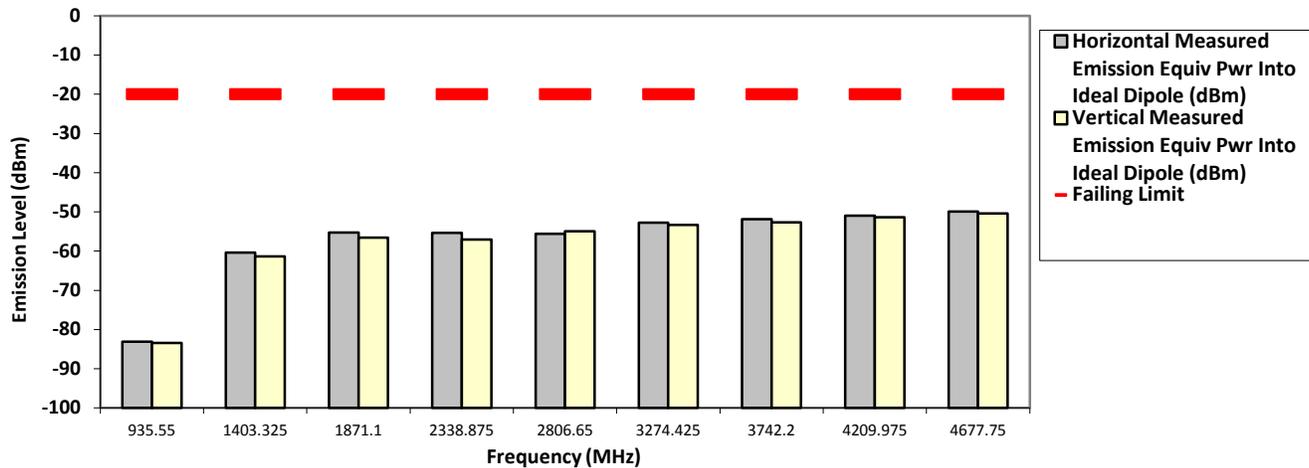

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, Aug 09, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


6.11.4. Test Limit

Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)

6.12.1. Test Setup

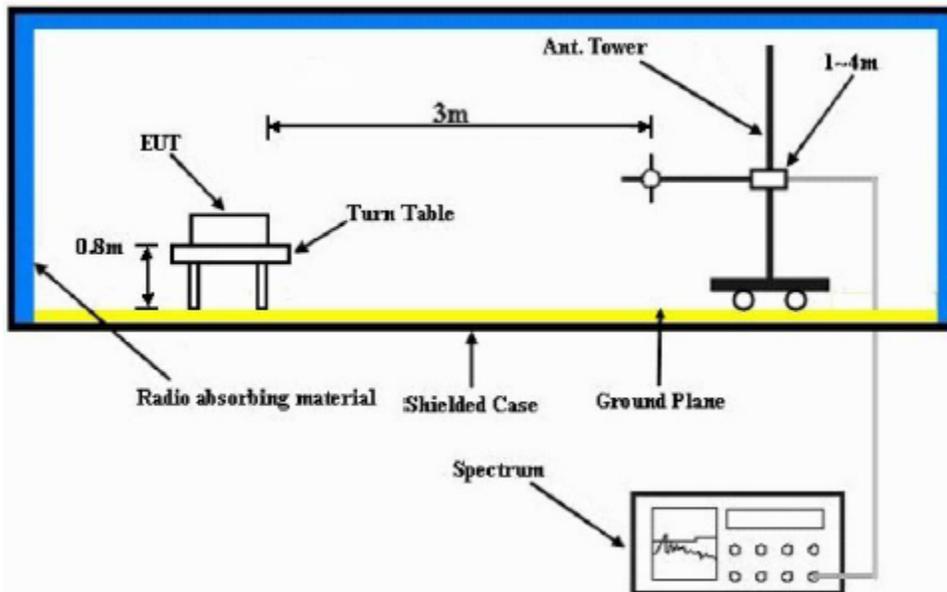

- 1) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100 kHz, VBW = 300 kHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.12.2. Test Result

Not Applicable


6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBW). Power is given in terms of effective radiated power (ERP).

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

6.13. AC Power Line Conducted Spur Emissions

6.13.1. Test Setup

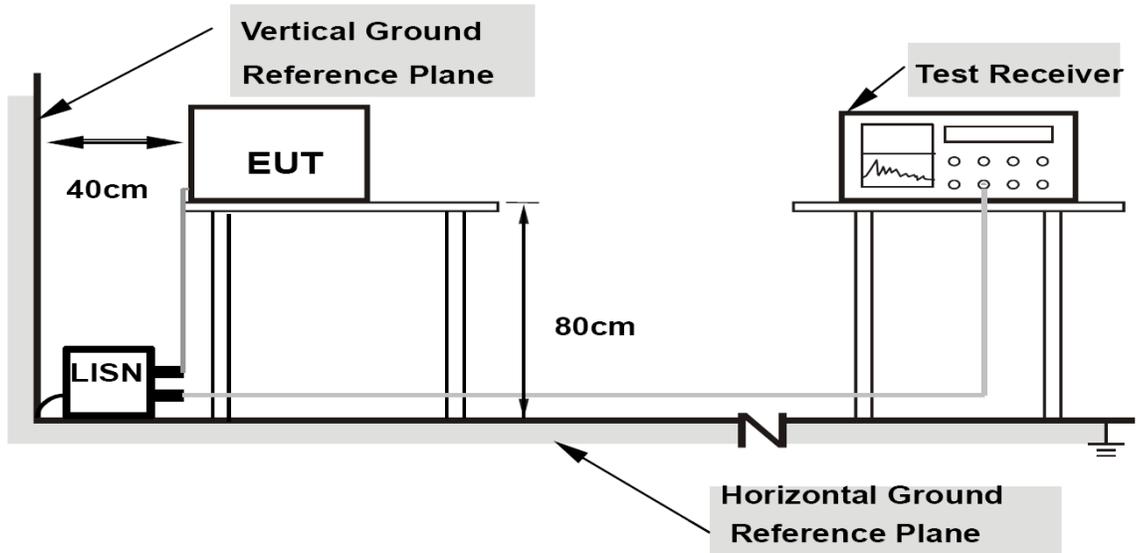

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50 μ H of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30 MHz was measured.

6.13.2. Test Result **Not Applicable**

6.13.3. Test Limit

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		