


	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC/ISED TEST REPORT Report Revision : Rev.A																																
<table><tr><td>Date/s Tested</td><td>: 30-NOV-2021 - 10-JAN-2022</td></tr><tr><td>Report Issue Date</td><td>: 18-Mar-2022</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: HERI NIEVES</td></tr><tr><td>Product Type</td><td>: Mobile</td></tr><tr><td>Product Version (PMN)</td><td>: APX8500</td></tr><tr><td>Model Number (HVIN)</td><td>: M37TSS9PW1AN</td></tr><tr><td>Frequency Band</td><td>: 764-805MHz</td></tr><tr><td>Max RF Output Power</td><td>: 36 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version (FVIN)</td><td>: D26.50.06</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 90 ISED RSS- Gen Issue 5 / 119 Issue 12</td><td>PASS</td></tr></table>		Date/s Tested	: 30-NOV-2021 - 10-JAN-2022	Report Issue Date	: 18-Mar-2022	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: HERI NIEVES	Product Type	: Mobile	Product Version (PMN)	: APX8500	Model Number (HVIN)	: M37TSS9PW1AN	Frequency Band	: 764-805MHz	Max RF Output Power	: 36 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version (FVIN)	: D26.50.06	(LMR) FCC 47 CFR Part 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS
Date/s Tested	: 30-NOV-2021 - 10-JAN-2022																																
Report Issue Date	: 18-Mar-2022																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: HERI NIEVES																																
Product Type	: Mobile																																
Product Version (PMN)	: APX8500																																
Model Number (HVIN)	: M37TSS9PW1AN																																
Frequency Band	: 764-805MHz																																
Max RF Output Power	: 36 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version (FVIN)	: D26.50.06																																
(LMR) FCC 47 CFR Part 90 ISED RSS- Gen Issue 5 / 119 Issue 12	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Nuraini Binti Ismail Test Personnel	Approved Signatory:  Soon Oi May Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup.....	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup.....	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	14
6.3. Audio Frequency Response	15
6.3.1. Test Setup.....	15
6.3.2. Test Result	16
6.3.3. Test Limit.....	16
6.4. Audio Low Pass Filter Response	17
6.4.1. Test Setup.....	17
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Modulation Limiting	20
6.5.1. Test Setup.....	20
6.5.2. Test Result	21
6.5.3. Test Limit.....	21
6.6. Occupied Bandwidth.....	22
6.6.1. Test Setup (Analog)	22
6.6.2. Test Result (Analog).....	22
6.6.3. Test Setup (Digital).....	23
6.6.4. Test Result (Digital).....	23
6.6.5. Test Limit.....	23
6.7. Band Edge Conducted Spurious Emission (Part 22)	24
6.7.1. Test Setup (Analog)	24
6.7.2. Test Result (Analog).....	24
6.7.3. Test Setup (Digital).....	25
6.7.4. Test Result (Digital).....	25
6.7.5. Test Limit.....	25
6.8. Transient Frequency Behavior.....	26
6.8.1. Test Setup.....	26
6.8.2. Test Result	26
6.8.3. Test Limit.....	27

6.9.	Adjacent Channel Power.....	28
6.9.1.	Test Setup (Analog)	28
6.9.2.	Test Result	29
6.9.3.	Test Setup (Digital).....	31
6.9.4.	Test Result	32
6.9.5.	Test Limit.....	40
6.10.	Conducted Spurious Emission	42
6.10.1.	Test Setup.....	42
6.10.2.	Test Result (Analog)	43
6.10.3.	Test Result (Digital).....	49
6.10.4.	Test Limit.....	64
6.11.	Radiated Spurious Emission	83
6.11.1.	Test Setup.....	83
6.11.2.	Test Result (Analog)	84
6.11.3.	Test Result (Digital).....	86
6.11.4.	Test Limit.....	122
6.12.	Effective Radiated Power (ERP)	123
6.12.1.	Test Setup.....	123
6.12.2.	Test Result	124
6.12.3.	Test Limit.....	125
6.13.	GNSS (EIRP for 1559 - 1610MHz).....	126
6.13.1.	Test Setup.....	126
6.13.1.	Test Result	127
6.13.2.	Test Limit.....	127

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	13-Feb-2022	Nuraini

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
2.4/5 GHz Wi-Fi/BT and GNSS BT/WiFi Antenna BT/WiFi/GPS Antenna	MOTOROLA	AN000163A01
O7 Control Head (English)	MOTOROLA	PMHN4194C
Audio (PTT)	MOTOROLA	HMN4079G

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

Antenna gain disclaimer

Antenna gain information is provided by customer. The validity of the results is dependent upon this information. The lab will not be held accountable in the event the supplied information affects compliance.

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, and antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046, 90.541	RSS-Gen, RSS-119	RF Power Output	Pass		681TXT7208
2.1055, 90.213, 22.355, 74.464, 74.561	RSS-Gen, RSS-119	Frequency Stability	Pass		681TXT7208
2.1047	RSS-Gen, RSS-119	Audio Frequency Response	Pass		681TXT7208
2.1047	RSS-Gen, RSS-119	Audio Low Pass Filter Response	Pass		681TXT7208
2.1047	RSS-Gen, RSS-119	Modulation limiting	Pass		681TXT7208
-	-	Occupied Bandwidth	NA		
-	-	Band Edge Conducted Spurious Emission	NA		
-	-	Transient Frequency Behavior	NA		
90.543	RSS-119	Adjacent Channel Power	Pass		681TXT7208
2.1051, 90.210	RSS-Gen, RSS-119	Conducted Spurious Emissions	Pass	Worst case emission- -26.58dBm	681TXT7208
2.1053, 90.210	RSS-Gen, RSS-119	Radiated Spurious Emission	Pass	Worst case emission – -53.31dBm	681TXT7177, G0P0UX0XC
Part 90	RSS-119	GNSS (EIRP for 1559 – 1610MHz)	Pass		681TXT7177
Part 90	RSS-119	Effective Radiated Power (ERP)	Pass		681TXT7177

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz dB μ V/m (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz dB μ V/m (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Radiated Emissions dBm (ERP/EiRP)	30MHz ~ 18GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.6 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	08-Mar-21	08-Mar-22
SWITCH CONTROL SYSTEM	3499B	CN40150337	CNR	CNR
POWER SENSOR	E4412A	MY41502652	09-Sep-21	09-Sep-22
POWER SUPPLY	6032A	3232A08203	14-Jun-21	14-Jun-22
POWER METER	E4416A	GB41293240	14-Mar-21	14-Mar-22
SIGNAL GENERATOR	2042	203002/747	23-Feb-21	23-Feb-22
ANALYZER SIGNAL (DYNAMIC)	35670A	MY42506847	17-Sep-21	17-Sep-22
MODULATION ANALYZER	8901B	3403A04974	06-Sep-21	06-Sep-22
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE R1.1.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER SENSOR	E9301B	MY41495393	15-May-21	15-May-22
SIGNAL GENERATOR	8657A	3039A02769	11-Jun-21	11-Jun-22
AUDIO ANALYZER	8903B	3011A10318	01-Nov-21	01-Nov-22
POWER METER	E4418B	MY45104923	20-Feb-21	20-Feb-22
STEP ATTENUATOR	8494G	MY52300967	17-Jun-21	17-Jun-22
POWER SUPPLY	6033A	3004A04987	08-Jul-21	08-Jul-22
ANALYZER SPECTRUM	E4445A	MY46181732	29-Jun-21	29-Jun-22
ATTENUATOR/110DB	8496G	MY52300176	22-Aug-21	22-Aug-22
AUDIO ANALYZER	8903B	3413A14586	13-Sep-21	13-Sep-22
ANALYZER MODULATION	8901B	2619A00845	30-Sep-21	30-Sep-22
AUDIO ANALYZER	8903B	3011A12488	13-Sep-21	13-Sep-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

FCC CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY46185415	10-Jan-20	10-Jan-22
POWER SUPPLY	6031A	3221A02613	25-May-21	25-May-22
INTERFACE BOX - FILTER	CNR	CS001	06-Jul-21	06-Jul-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	06-Apr-21	06-Apr-23
DRG HORN FREQ.	SAS-571	719	13-Sep-21	13-Sep-22
POWER SUPPLY	N7976A	MY53410110	24-May-21	24-May-22
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101750	15-Jan-21	15-Jan-22
EMI TEST RECEIVER	ESIB26	827769/009	11-Mar-21	11-Mar-22
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112D	55546	06-Jun-21	06-Jun-22
BILOG ANTENNA	CBL6112B	2964	4-May-21	4-May-22
HYGRO-THERMOMETER	SDL500	A.016800	18-May-21	18-May-22
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	4-Feb-21	4-Feb-22
PREAMPLIFIER 18-40GHz	BBV9721	9721-007	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00203479	5-Feb-21	5-Feb-22
TEST SOFTWARE	EMC FCC IC BLUETOOTH RE TEST			
VERSION	EMC FCC RE v1.6.2			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	764.0125, 768.0125, 769.0125, 769.0875, 774.8875, 775.9875, 794.0125, 798.0125, 799.0125, 799.0875, 804.9125	Nuraini	23.4°C, 50%RH
Frequency Stability	Max	Analog	769.0875	Nuraini	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	769.0875	Nuraini	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	769.0875	Nuraini	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	769.0875	Nuraini	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	Analog, C4FM, Phase II	NA		
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog, C4FM, Phase II	NA		
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog, C4FM, Phase II	NA		
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	Analog, C4FM, Phase II	769.0875, 774.8875, 799.0875, 804.9125	Nuraini	23.4°C, 50%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	764.0125, 769.0125, 769.0875, 774.8875, 794.0125, 799.0875, 804.9125	Nuraini	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	764.0125, 769.0125, 769.0875, 774.8875, 794.0125, 799.0875, 804.9125	Qawiman & Nazrin	24.1°C, 69.8%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	799.0125, 804.9125	Qawiman	24.1°C, 69.8%RH
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	769.0125, 769.0875, 799.0125, 804.9125	Qawiman	24.1°C, 69.8%RH

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

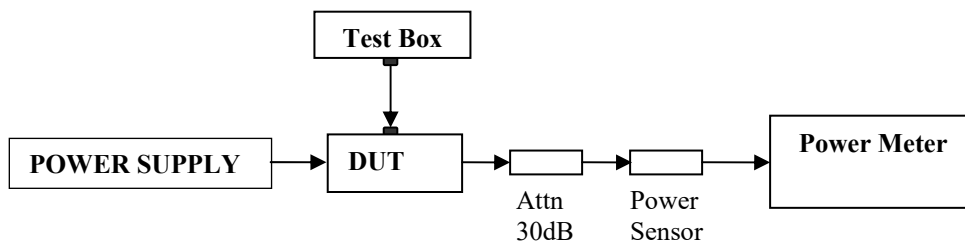


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
764.0125	1.01	2.66	34.8	9.03	Not for FCC review
768.0125	1.01	2.64	35	8.86	Not for FCC review
769.0125	1.01	2.64	1.97	3.44	Itinerant (2W)
769.0875	1.02	2.64	35.1	8.86	
774.8875	1.02	2.64	35.2	8.84	
775.9875	1.02	2.63	35.5	8.86	Not for FCC review
794.0125	1	2.53	35	8.63	Not for FCC review
798.0125	1	2.56	35	8.44	Not for FCC review
799.0125	1	2.56	1.99	3.42	Itinerant (2W)
799.0875	1	2.55	34.9	8.40	
804.9125	1.01	2.51	35.2	8.2	

6.2. Frequency Stability

6.2.1. Test Setup

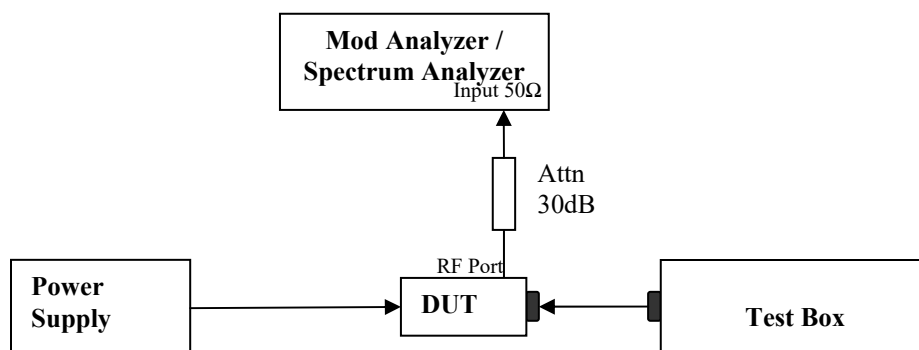


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

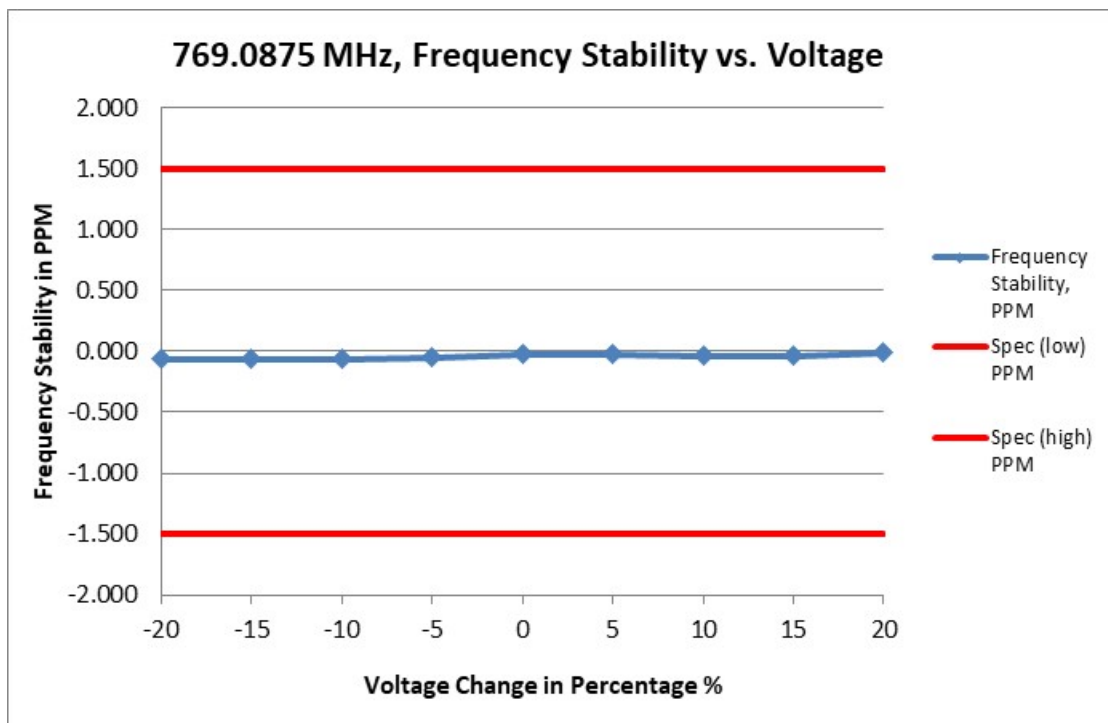

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	769.087450	-0.065	-1.500	1.500
-15	11.560	769.087450	-0.065	-1.500	1.500
-10	12.240	769.087450	-0.065	-1.500	1.500
-5	12.920	769.087460	-0.052	-1.500	1.500
0	13.600	769.087480	-0.026	-1.500	1.500
5	14.280	769.087480	-0.026	-1.500	1.500
10	14.960	769.087470	-0.039	-1.500	1.500
15	15.640	769.087470	-0.039	-1.500	1.500
20	16.320	769.087490	-0.013	-1.500	1.500

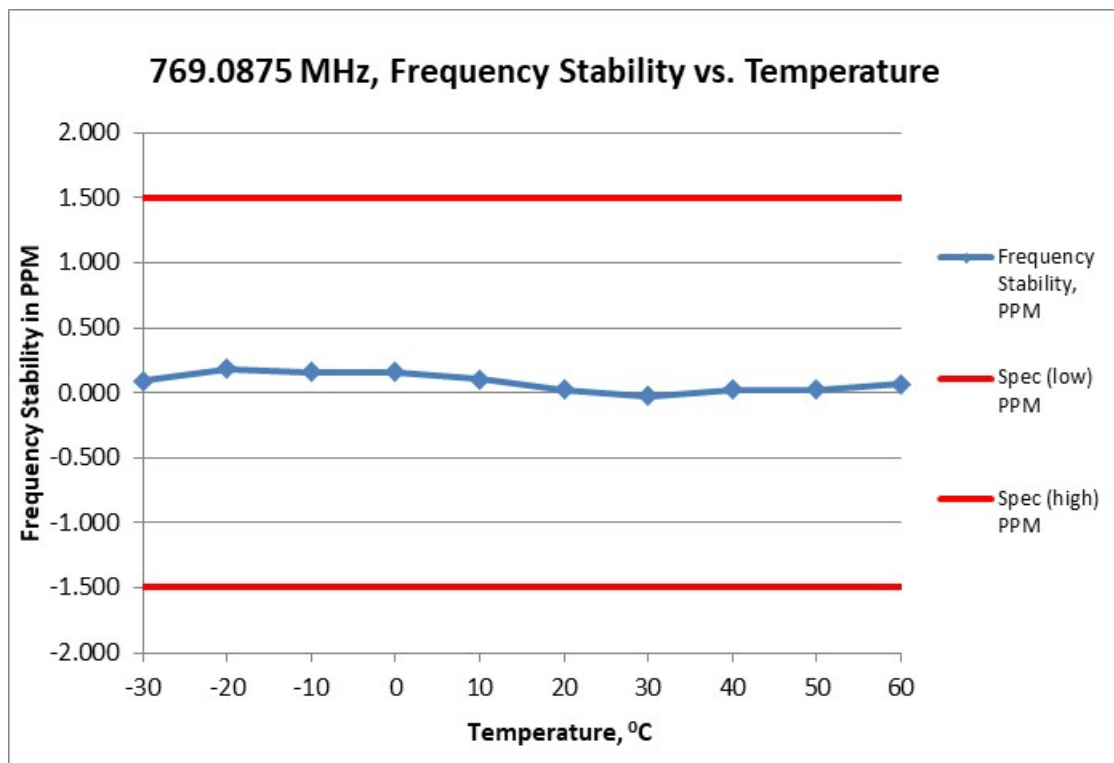

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	769.087570	0.091	-1.500	1.500
-20	769.087640	0.182	-1.500	1.500
-10	769.087620	0.156	-1.500	1.500
0	769.087620	0.156	-1.500	1.500
10	769.087580	0.104	-1.500	1.500
20	769.087520	0.026	-1.500	1.500
30	769.087480	-0.026	-1.500	1.500
40	769.087520	0.026	-1.500	1.500
50	769.087520	0.026	-1.500	1.500
60	769.087550	0.065	-1.500	1.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 1.5ppm


6.3. Audio Frequency Response

6.3.1. Test Setup

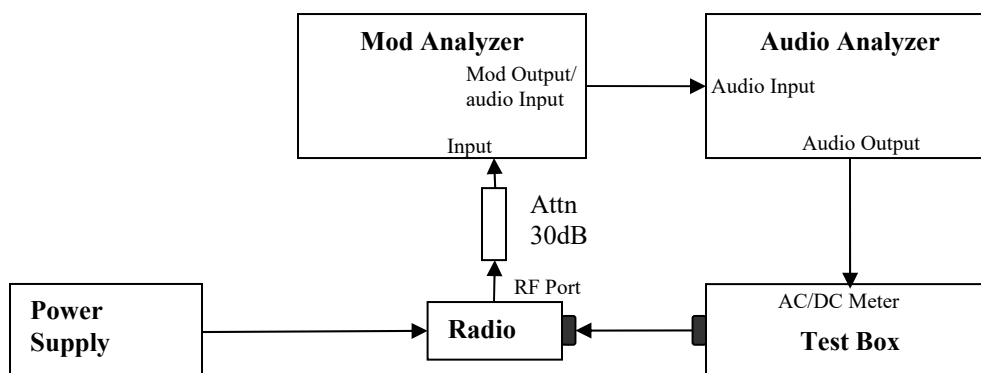


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

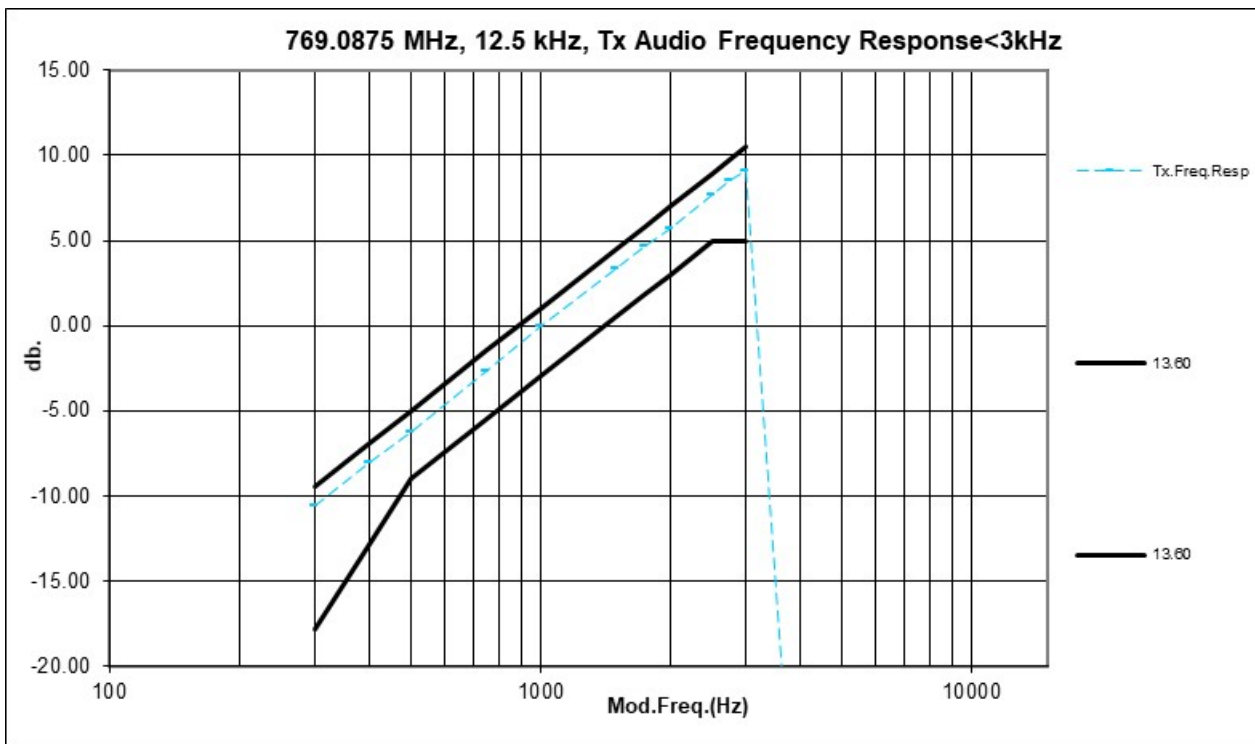

6.3.3. Test Limit

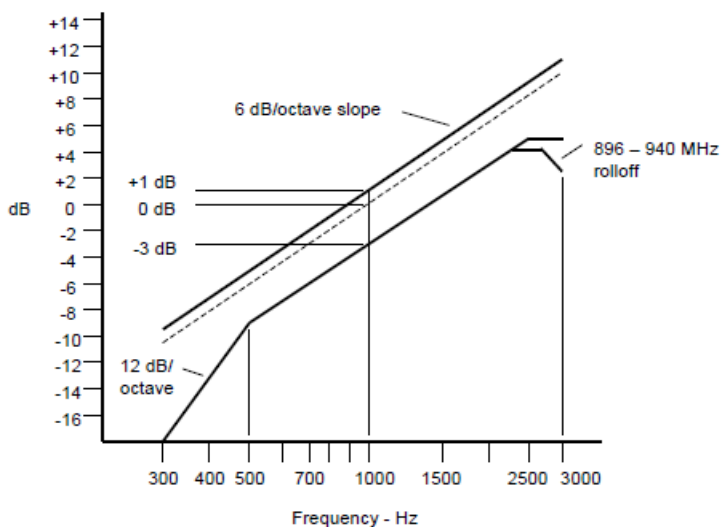


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

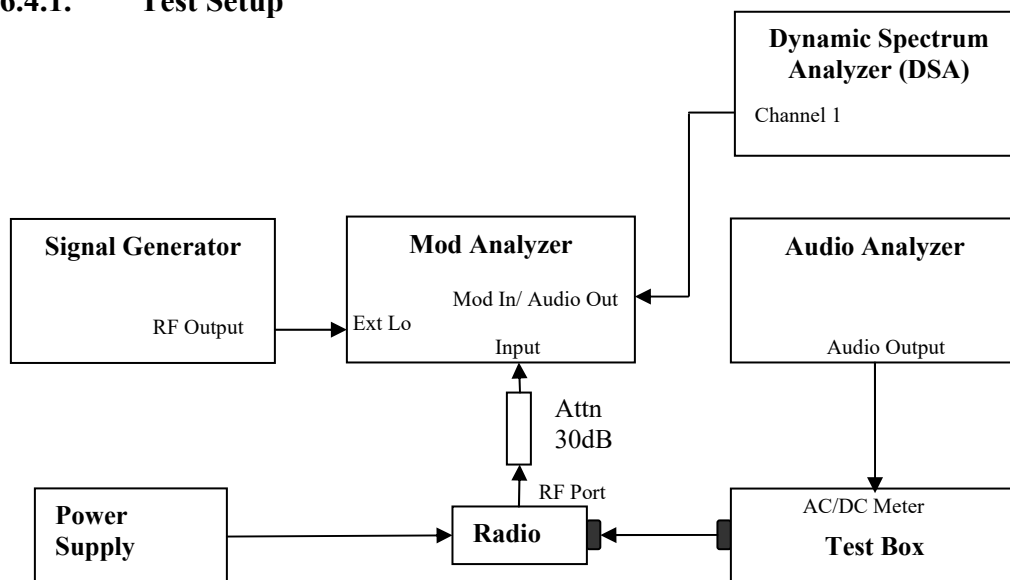


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

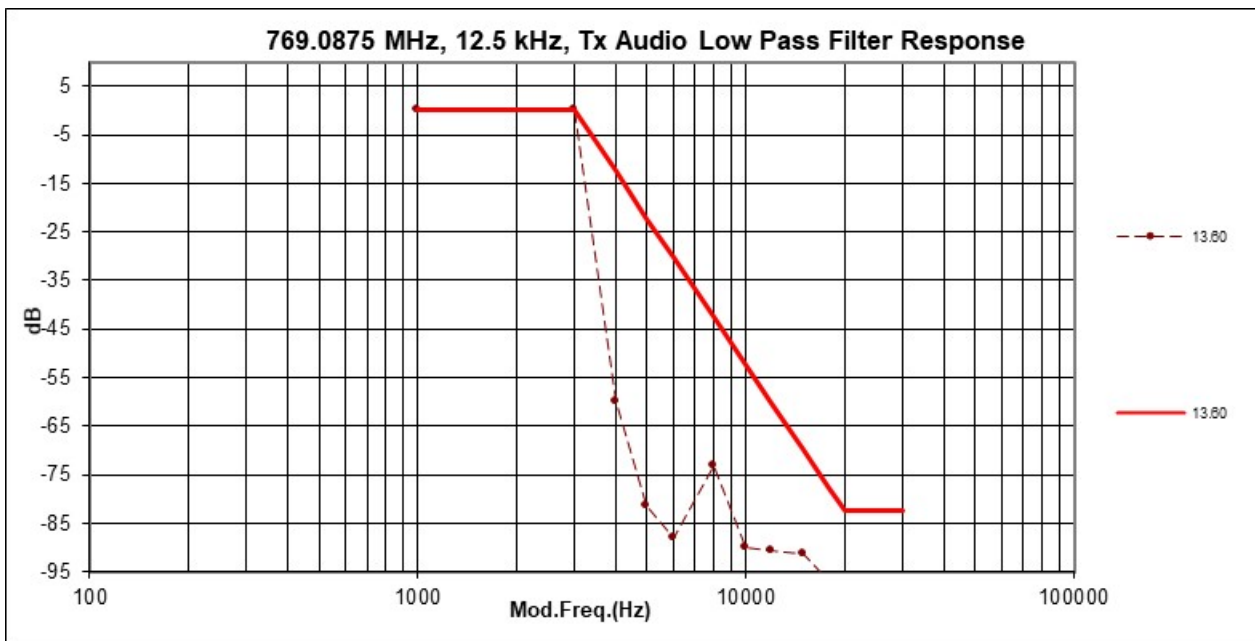

6.4.3. Test Limit

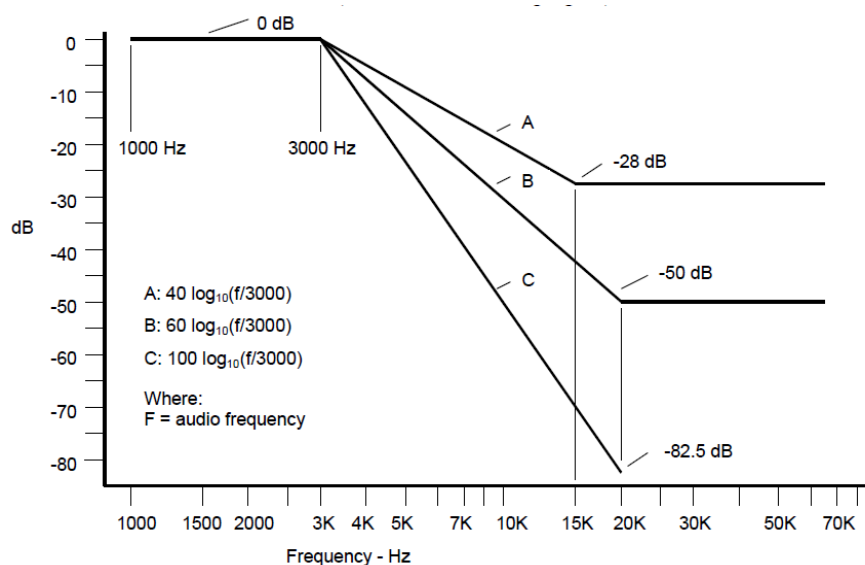

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.


6.5. Modulation Limiting

6.5.1. Test Setup

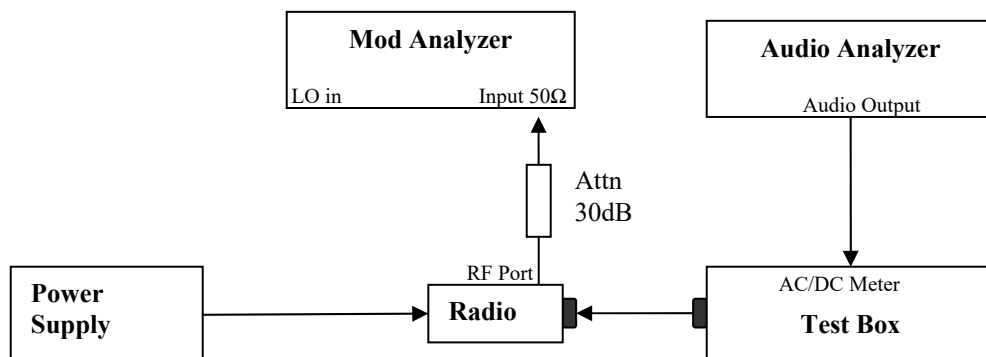

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

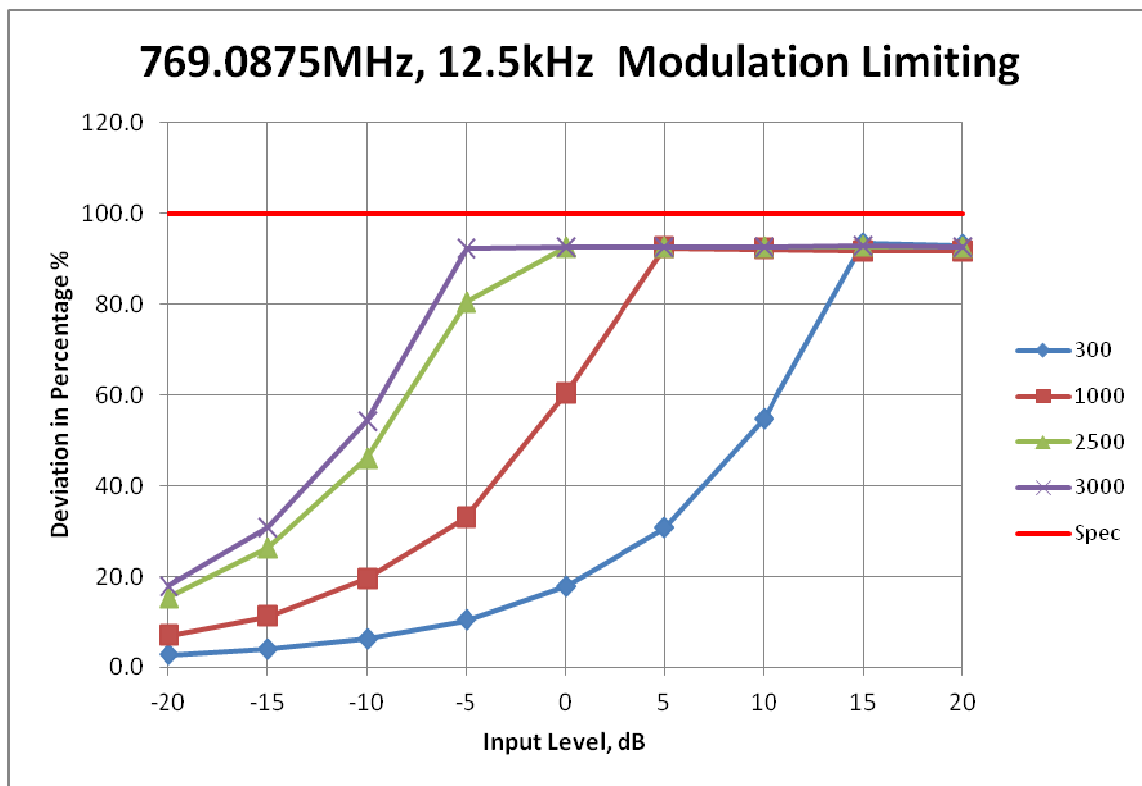


6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

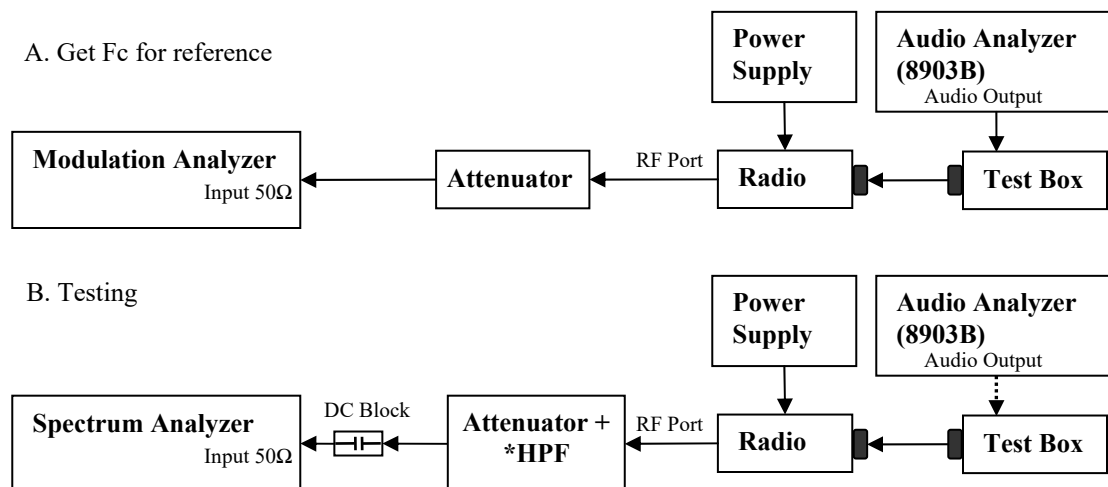

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.


* Only HPF added for Mask 80.211 measurement with attenuator.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

6.6.2. Test Result (Analog)

Not Applicable

6.6.3. Test Setup (Digital)

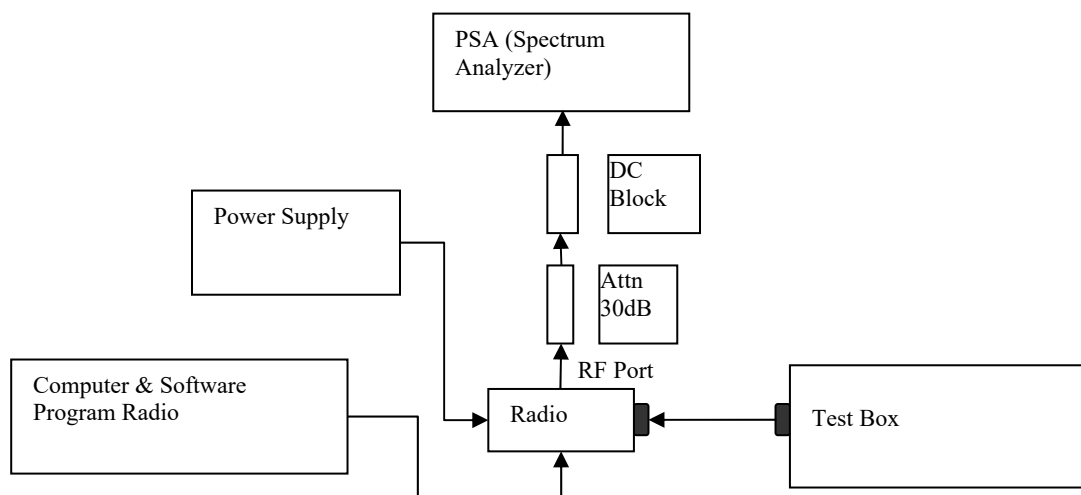

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

* 99% Bandwidth measurement is computed by the spectrum analyzer and is consistent with the C63.26 5.4.4 method.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)


Not Applicable.

6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

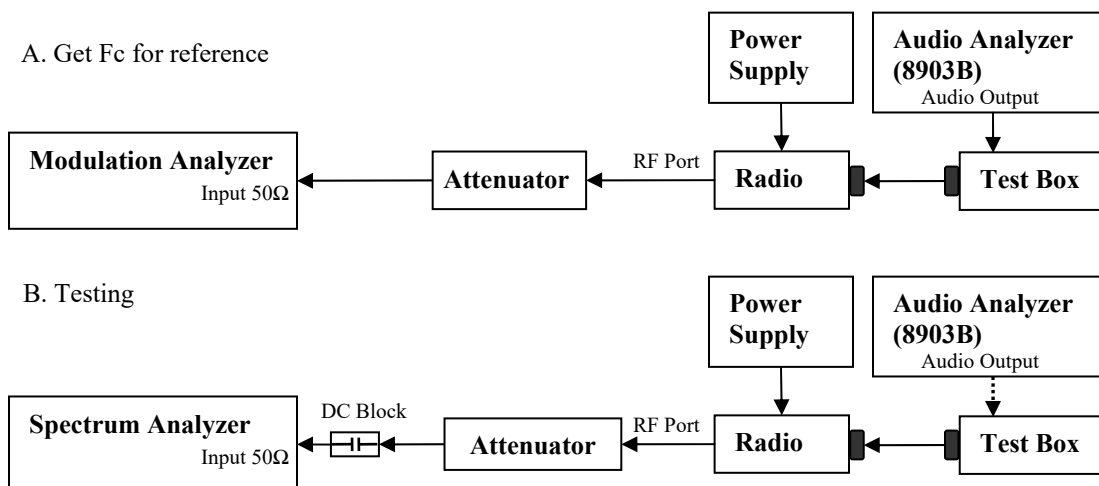

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.


*Note:

- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)

Not Applicable.

6.7.3. Test Setup (Digital)

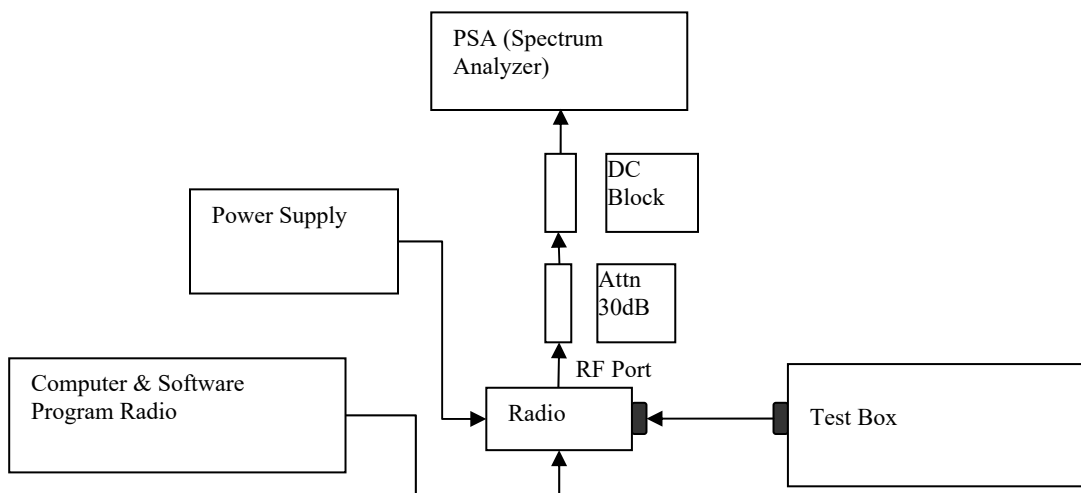

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)


Not Applicable

6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.8. Transient Frequency Behavior

6.8.1. Test Setup

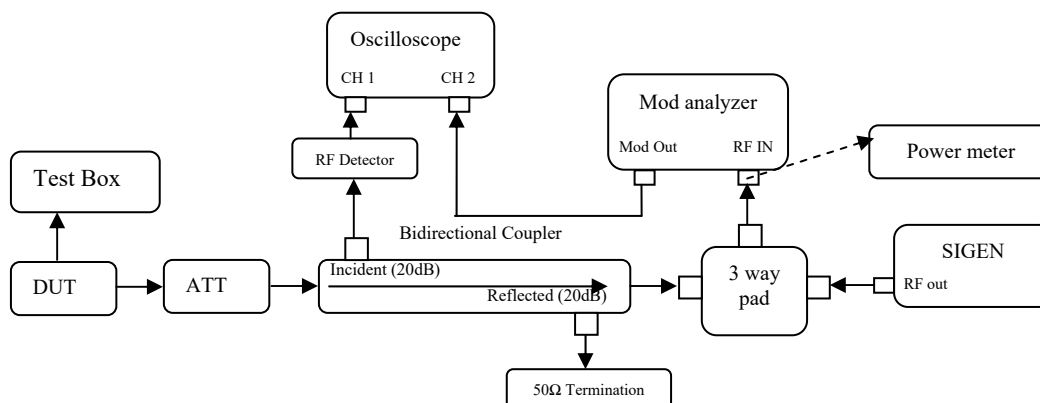

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Not Applicable

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

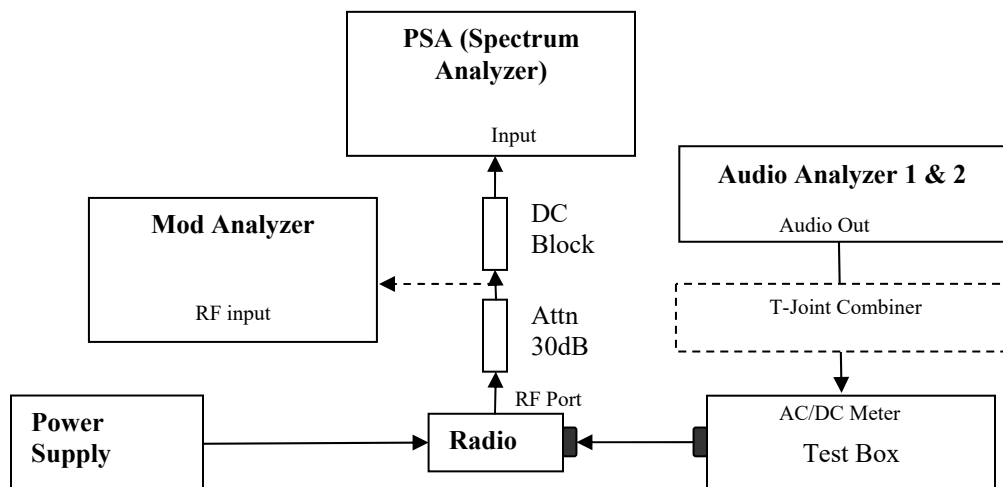

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result


Mode	Analog			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.554	-48.417	-40
15.625	6.25	-75.478	-75.160	-60
21.875	6.25	-76.499	-77.134	-60
37.500	25	-74.113	-74.603	-65
62.500	25	-76.648	-76.805	-65
87.500	25	-79.626	-79.344	-65
150.000	100	-77.619	-77.775	-65
250.000	100	-82.514	-82.610	-65
350.000	100	-84.871	-84.688	-65
400k	30	-90.590	-90.252	-75
12M	30	-90.543	-90.334	-75

Mode	Analog			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.517	-48.424	-40
15.625	6.25	-75.616	-76.009	-60
21.875	6.25	-76.977	-77.518	-60
37.500	25	-73.872	-74.073	-65
62.500	25	-76.868	-76.549	-65
87.500	25	-79.315	-79.311	-65
150.000	100	-77.681	-77.750	-65
250.000	100	-82.183	-82.292	-65
350.000	100	-84.648	-84.617	-65
400k	30	-90.505	-90.041	-75
12M	30	-90.891	-91.006	-75

Mode	Analog			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.502	-48.367	-40
15.625	6.25	-75.359	-76.020	-60
21.875	6.25	-77.069	-77.344	-60
37.500	25	-74.123	-73.888	-65
62.500	25	-76.949	-76.921	-65
87.500	25	-79.652	-79.647	-65
150.000	100	-77.828	-77.752	-65
250.000	100	-82.427	-82.467	-65
350.000	100	-84.699	-84.716	-65
400k	30	-90.338	-90.063	-75
12M	30	-90.643	-90.923	-75

Mode	Analog			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.336	-48.201	-40
15.625	6.25	-75.120	-75.309	-60
21.875	6.25	-76.760	-76.388	-60
37.500	25	-73.755	-73.551	-65
62.500	25	-76.260	-76.390	-65
87.500	25	-79.276	-79.294	-65
150.000	100	-77.728	-77.626	-65
250.000	100	-82.462	-82.345	-65
350.000	100	-84.613	-84.542	-65
400k	30	-90.717	-89.945	-75
12M	30	-90.519	-90.754	-75

6.9.3. Test Setup (Digital)

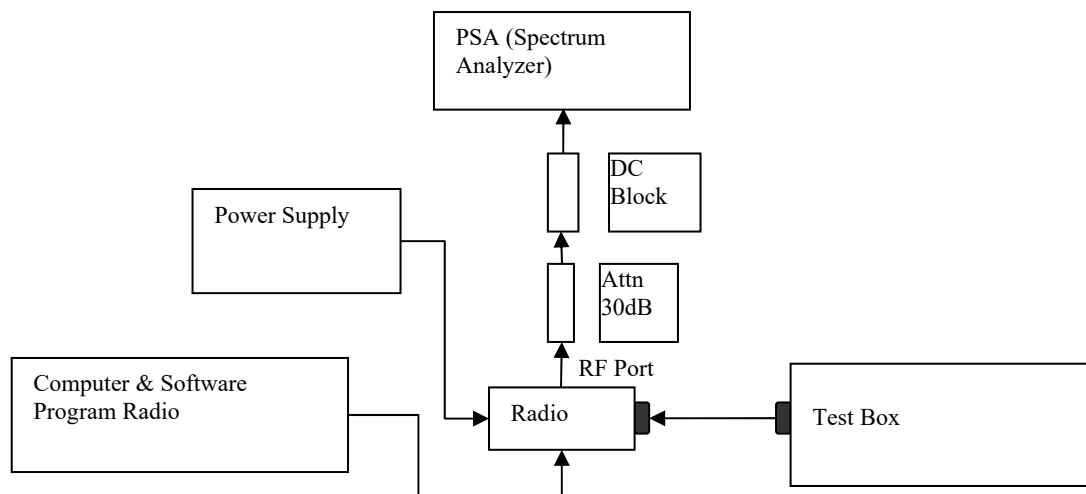

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

Mode	Digital Data			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.839	-43.392	-40
15.625	6.25	-76.203	-76.218	-60
21.875	6.25	-77.397	-77.097	-60
37.500	25	-74.350	-74.541	-65
62.500	25	-76.593	-76.744	-65
87.500	25	-79.606	-79.806	-65
150.000	100	-77.955	-77.851	-65
250.000	100	-82.411	-82.544	-65
350.000	100	-84.723	-84.815	-65
400k	30	-89.687	-90.120	-75
12M	30	-90.869	-90.958	-75

Mode	Digital Data			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.692	-44.534	-40
15.625	6.25	-76.646	-76.701	-60
21.875	6.25	-77.702	-77.673	-60
37.500	25	-74.357	-74.209	-65
62.500	25	-76.582	-76.355	-65
87.500	25	-79.618	-79.626	-65
150.000	100	-77.729	-77.807	-65
250.000	100	-82.381	-82.435	-65
350.000	100	-84.421	-84.374	-65
400k	30	-89.676	-90.017	-75
12M	30	-90.848	-90.814	-75

Mode	Digital Data			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-47.953	-47.136	-40
15.625	6.25	-75.593	-75.410	-60
21.875	6.25	-77.829	-77.517	-60
37.500	25	-73.896	-73.724	-65
62.500	25	-76.495	-76.431	-65
87.500	25	-79.545	-79.507	-65
150.000	100	-77.071	-77.326	-65
250.000	100	-81.391	-81.079	-65
350.000	100	-82.780	-82.636	-65
400k	30	-87.899	-88.009	-75
12M	30	-87.281	-87.609	-75

Mode	Digital Data			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.600	-43.419	-40
15.625	6.25	-76.100	-76.047	-60
21.875	6.25	-78.030	-77.890	-60
37.500	25	-74.054	-73.969	-65
62.500	25	-77.288	-76.991	-65
87.500	25	-80.604	-80.564	-65
150.000	100	-78.641	-78.297	-65
250.000	100	-83.183	-82.771	-65
350.000	100	-84.876	-84.971	-65
400k	30	-90.539	-90.997	-75
12M	30	-90.227	-90.216	-75

Mode	Digital Voice			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-47.561	-49.779	-40
15.625	6.25	-74.811	-75.498	-60
21.875	6.25	-76.572	-76.494	-60
37.500	25	-74.111	-74.251	-65
62.500	25	-76.680	-76.519	-65
87.500	25	-79.814	-79.500	-65
150.000	100	-77.860	-77.736	-65
250.000	100	-82.571	-82.597	-65
350.000	100	-84.857	-84.702	-65
400k	30	-90.261	-90.284	-75
12M	30	-90.980	-91.071	-75

Mode	Digital Voice			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.685	-49.604	-40
15.625	6.25	-75.199	-75.836	-60
21.875	6.25	-77.242	-76.842	-60
37.500	25	-74.144	-73.938	-65
62.500	25	-76.620	-76.452	-65
87.500	25	-79.757	-79.388	-65
150.000	100	-77.739	-77.723	-65
250.000	100	-82.269	-82.405	-65
350.000	100	-84.426	-84.360	-65
400k	30	-89.785	-89.901	-75
12M	30	-91.313	-91.375	-75

Mode	Digital Voice			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.591	-44.971	-40
15.625	6.25	-75.860	-76.160	-60
21.875	6.25	-77.504	-77.027	-60
37.500	25	-74.312	-74.122	-65
62.500	25	-76.778	-76.917	-65
87.500	25	-79.890	-79.519	-65
150.000	100	-77.925	-77.768	-65
250.000	100	-82.591	-82.786	-65
350.000	100	-85.078	-84.966	-65
400k	30	-90.450	-90.221	-75
12M	30	-90.824	-90.369	-75

Mode	Digital Voice			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-46.215	-46.729	-40
15.625	6.25	-74.897	-74.261	-60
21.875	6.25	-77.656	-77.154	-60
37.500	25	-73.916	-73.603	-65
62.500	25	-76.649	-76.299	-65
87.500	25	-79.384	-79.238	-65
150.000	100	-77.025	-77.277	-65
250.000	100	-81.124	-81.202	-65
350.000	100	-82.711	-82.585	-65
400k	30	-88.101	-87.903	-75
12M	30	-88.057	-87.982	-75

Mode	Digital Voice Encryption			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.437	-44.350	-40
15.625	6.25	-75.554	-75.773	-60
21.875	6.25	-77.674	-77.030	-60
37.500	25	-73.863	-73.921	-65
62.500	25	-76.373	-76.460	-65
87.500	25	-79.306	-79.445	-65
150.000	100	-77.134	-77.073	-65
250.000	100	-80.884	-80.897	-65
350.000	100	-82.447	-82.452	-65
400k	30	-87.887	-88.066	-75
12M	30	-87.769	-87.565	-75

Mode	Digital Voice Encryption			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.788	-45.277	-40
15.625	6.25	-76.160	-76.811	-60
21.875	6.25	-77.532	-76.863	-60
37.500	25	-74.134	-74.136	-65
62.500	25	-76.481	-76.283	-65
87.500	25	-79.528	-79.558	-65
150.000	100	-77.347	-77.160	-65
250.000	100	-81.263	-81.011	-65
350.000	100	-82.567	-82.629	-65
400k	30	-88.125	-87.341	-75
12M	30	-87.833	-87.644	-75

Mode	Digital Voice Encryption			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-46.802	-44.522	-40
15.625	6.25	-74.823	-74.231	-60
21.875	6.25	-77.290	-76.541	-60
37.500	25	-74.234	-74.013	-65
62.500	25	-76.708	-76.935	-65
87.500	25	-79.774	-79.801	-65
150.000	100	-77.357	-77.594	-65
250.000	100	-81.281	-81.483	-65
350.000	100	-82.792	-82.903	-65
400k	30	-87.564	-88.172	-75
12M	30	-87.913	-88.135	-75

Mode	Digital Voice Encryption			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.513	-45.871	-40
15.625	6.25	-74.109	-74.329	-60
21.875	6.25	-77.042	-76.929	-60
37.500	25	-74.108	-74.183	-65
62.500	25	-76.954	-76.092	-65
87.500	25	-79.323	-79.101	-65
150.000	100	-77.037	-77.238	-65
250.000	100	-84.066	-84.133	-65
350.000	100	-84.162	-84.084	-65
400k	30	-89.557	-89.211	-75
12M	30	-87.894	-87.645	-75

Mode	Phase II			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-44.930	-43.356	-40
15.625	6.25	-76.698	-80.445	-60
21.875	6.25	-78.394	-78.827	-60
37.500	25	-73.548	-73.633	-65
62.500	25	-77.810	-77.798	-65
87.500	25	-80.802	-81.090	-65
150.000	100	-78.732	-78.950	-65
250.000	100	-82.916	-83.191	-65
350.000	100	-84.954	-84.938	-65
400k	30	-90.732	-90.354	-75
12M	30	-90.507	-91.173	-75

Mode	Phase II			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-46.559	-48.975	-40
15.625	6.25	-68.754	-78.979	-60
21.875	6.25	-69.566	-76.145	-60
37.500	25	-73.415	-73.467	-65
62.500	25	-77.614	-77.752	-65
87.500	25	-80.747	-80.721	-65
150.000	100	-78.661	-78.761	-65
250.000	100	-82.915	-82.960	-65
350.000	100	-84.635	-84.839	-65
400k	30	-90.506	-90.219	-75
12M	30	-90.678	-90.946	-75

Mode	Phase II			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-44.169	-43.722	-40
15.625	6.25	-65.132	-64.992	-60
21.875	6.25	-75.726	-76.156	-60
37.500	25	-70.714	-70.995	-65
62.500	25	-75.658	-75.955	-65
87.500	25	-78.833	-79.176	-65
150.000	100	-76.743	-77.092	-65
250.000	100	-80.694	-81.111	-65
350.000	100	-82.973	-83.105	-65
400k	30	-89.116	-88.592	-75
12M	30	-89.456	-89.625	-75

Mode	Phase II			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-52.759	-52.434	-40
15.625	6.25	-65.041	-65.489	-60
21.875	6.25	-78.133	-78.866	-60
37.500	25	-70.652	-70.888	-65
62.500	25	-75.362	-75.744	-65
87.500	25	-78.660	-79.124	-65
150.000	100	-76.408	-77.108	-65
250.000	100	-80.803	-81.055	-65
350.000	100	-82.944	-83.229	-65
400k	30	-89.022	-88.612	-75
12M	30	-89.460	-89.908	-75

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.10. Conducted Spurious Emission


6.10.1. Test Setup

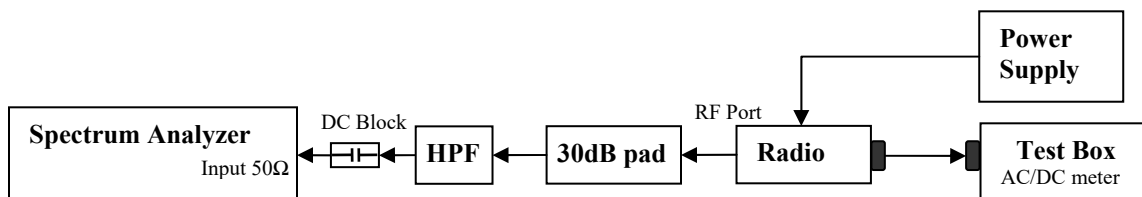

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.

6.10.2. Test Result (Analog)



Analog: 764.0125. MHz, 12.5.kHz Channel Spacing, Max. Power
Not for FCC review

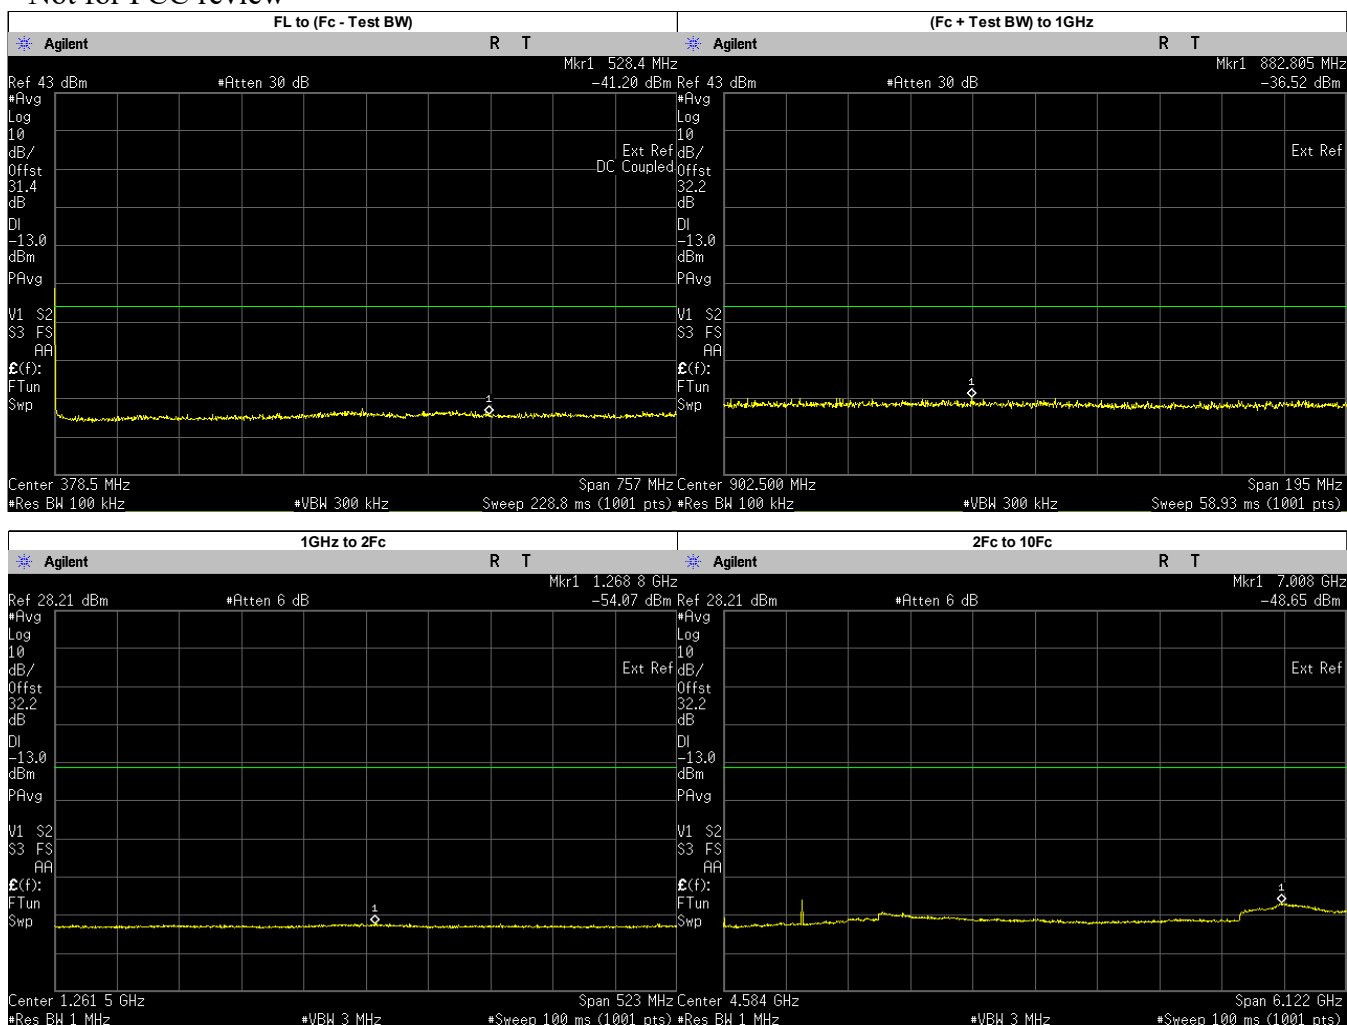

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	528.4000	-41.1970	-13.00	PASS
(Fc + Test BW) to 1GHz	882.8050	-36.5200	-13.00	PASS
1GHz to 2Fc	1268.8350	-54.0700	-13.00	PASS
2Fc to 10Fc	7008.4270	-48.6500	-13.00	PASS
	1528.0250	-52.8362	-13.00	PASS
	2292.0370	-50.1555	-13.00	PASS
	3056.0500	-51.3032	-13.00	PASS
	3820.0620	-52.5868	-13.00	PASS
	4584.0750	-52.9670	-13.00	PASS
	5348.0870	-53.5651	-13.00	PASS
	6112.1000	-53.1289	-13.00	PASS
	6876.1130	-50.1757	-13.00	PASS
	7640.1250	-50.6672	-13.00	PASS



Analog: 764.0125. MHz, 12.5.kHz Channel Spacing, Low. Power

Not for FCC review

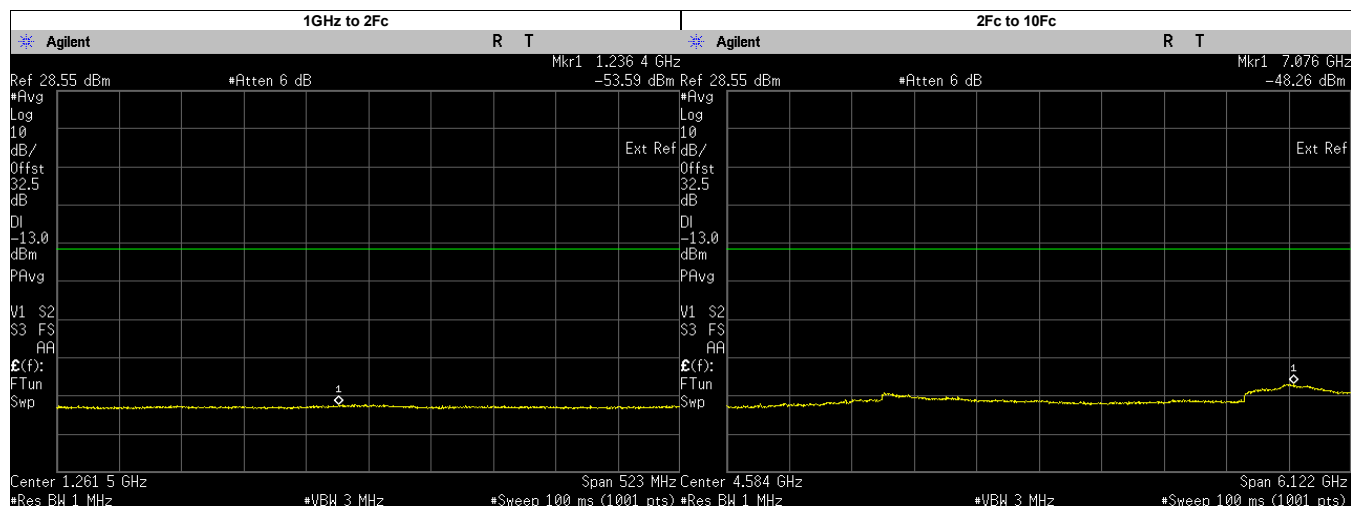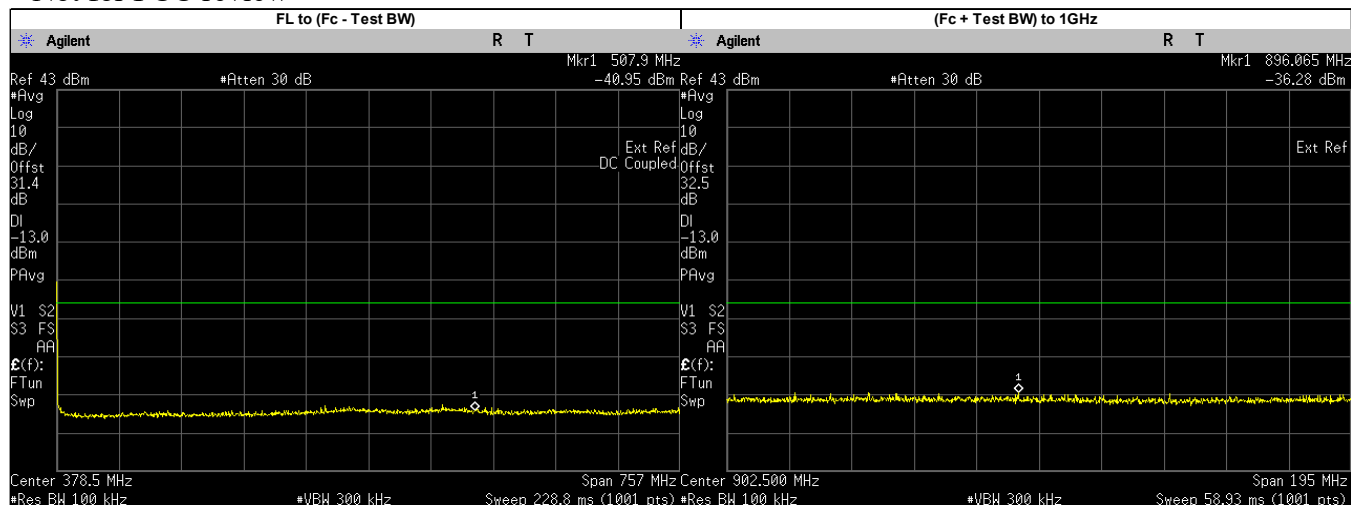



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	507.9000	-40.9470	-13.00	PASS
(Fc + Test BW) to 1GHz	896.0650	-36.2800	-13.00	PASS
1GHz to 2Fc	1236.4070	-53.5900	-13.00	PASS
2Fc to 10Fc	7075.7700	-48.2600	-13.00	PASS
	1528.0250	-54.1220	-13.00	PASS
	2292.0370	-53.7827	-13.00	PASS
	3056.0500	-51.1422	-13.00	PASS
	3820.0620	-52.2710	-13.00	PASS
	4584.0750	-52.9520	-13.00	PASS
	5348.0870	-53.2773	-13.00	PASS
	6112.1000	-52.7812	-13.00	PASS
	6876.1130	-49.8875	-13.00	PASS
	7640.1250	-50.3947	-13.00	PASS

Analog: 769.0125. MHz, 12.5.kHz Channel Spacing, Max. Power

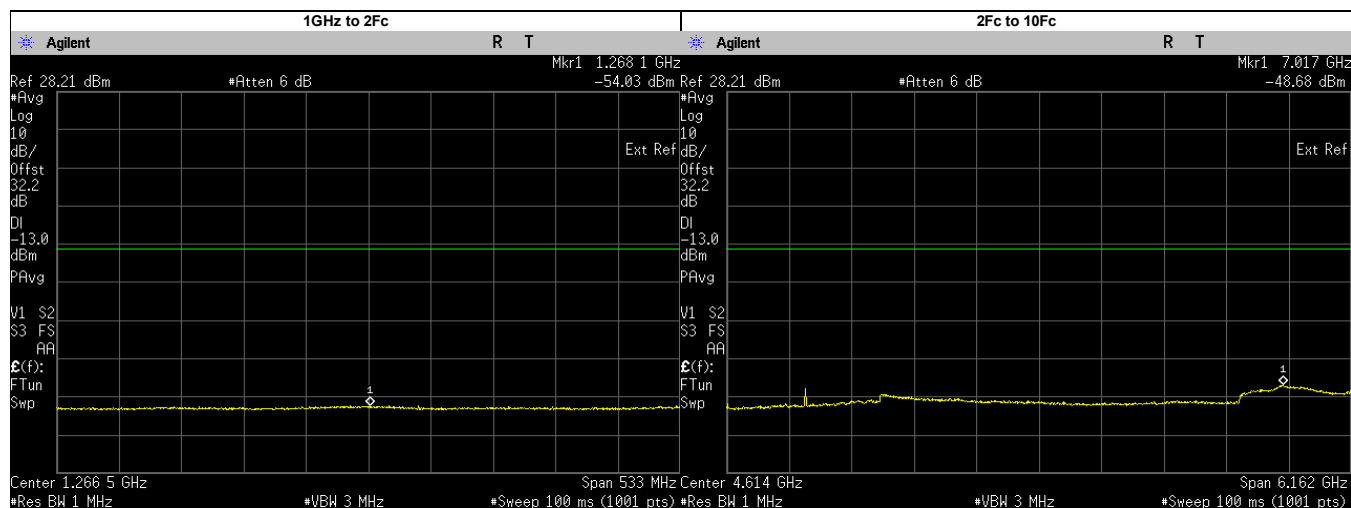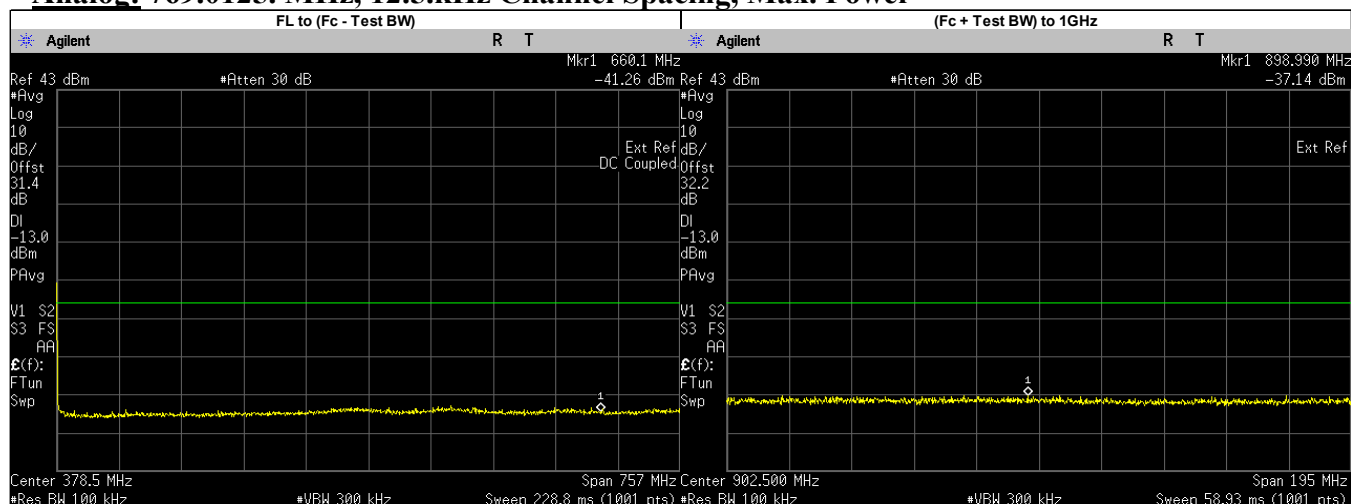



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	660.1000	-41.2620	-13.00	PASS
(Fc + Test BW) to 1GHz	898.9900	-37.1400	-13.00	PASS
1GHz to 2Fc	1268.1120	-54.0300	-13.00	PASS
2Fc to 10Fc	7017.2940	-48.6800	-13.00	PASS
	1538.0250	-53.6894	-13.00	PASS
	2307.0370	-51.1792	-13.00	PASS
	3076.0500	-51.3198	-13.00	PASS
	3845.0620	-52.7207	-13.00	PASS
	4614.0750	-53.0630	-13.00	PASS
	5383.0870	-53.7727	-13.00	PASS
	6152.1000	-53.1180	-13.00	PASS
	6921.1130	-50.0702	-13.00	PASS
	7690.1250	-50.2388	-13.00	PASS

Analog: 769.0875. MHz, 12.5.kHz Channel Spacing, Max. Power

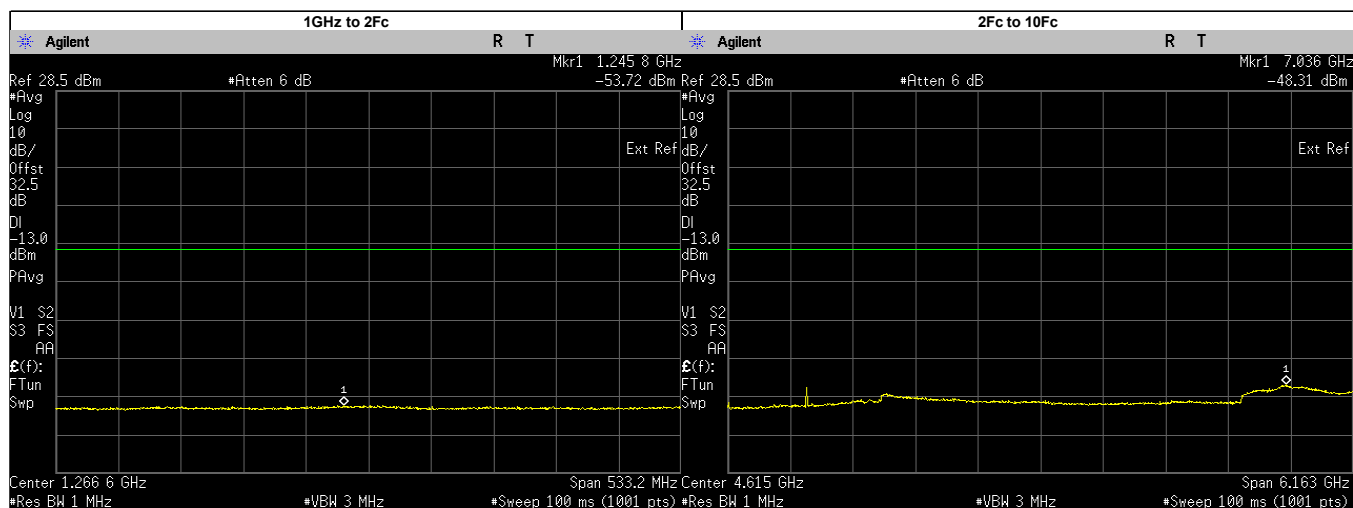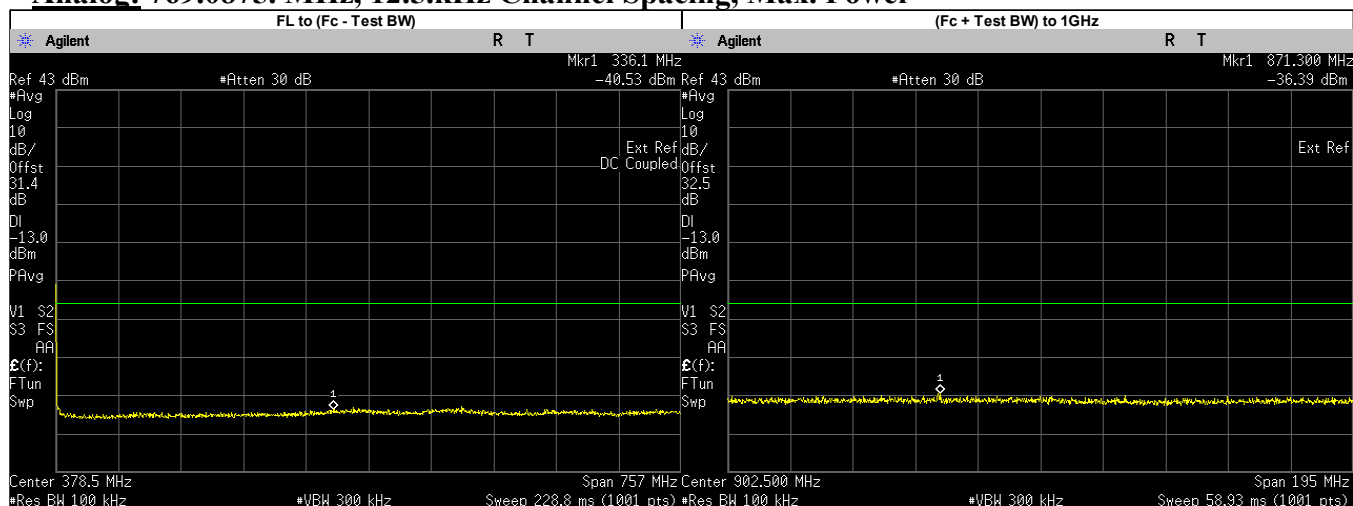



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	336.1000	-40.5280	-13.00	PASS
(Fc + Test BW) to 1GHz	871.3000	-36.3900	-13.00	PASS
1GHz to 2Fc	1245.7940	-53.7200	-13.00	PASS
2Fc to 10Fc	7036.4660	-48.3100	-13.00	PASS
	1538.1750	-53.2055	-13.00	PASS
	2307.2620	-50.7739	-13.00	PASS
	3076.3500	-50.8010	-13.00	PASS
	3845.4370	-52.4935	-13.00	PASS
	4614.5250	-52.8970	-13.00	PASS
	5383.6130	-53.1907	-13.00	PASS
	6152.7000	-52.7975	-13.00	PASS
	6921.7880	-49.6253	-13.00	PASS
	7690.8750	-50.1170	-13.00	PASS

Analog: 769.0875. MHz, 12.5.kHz Channel Spacing, Low. Power

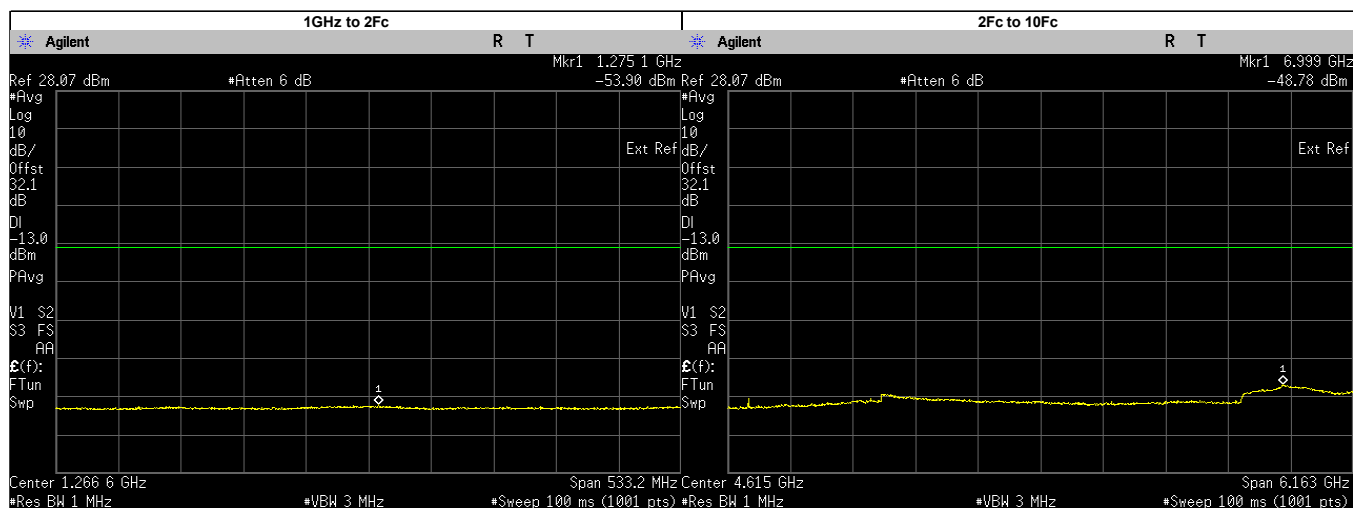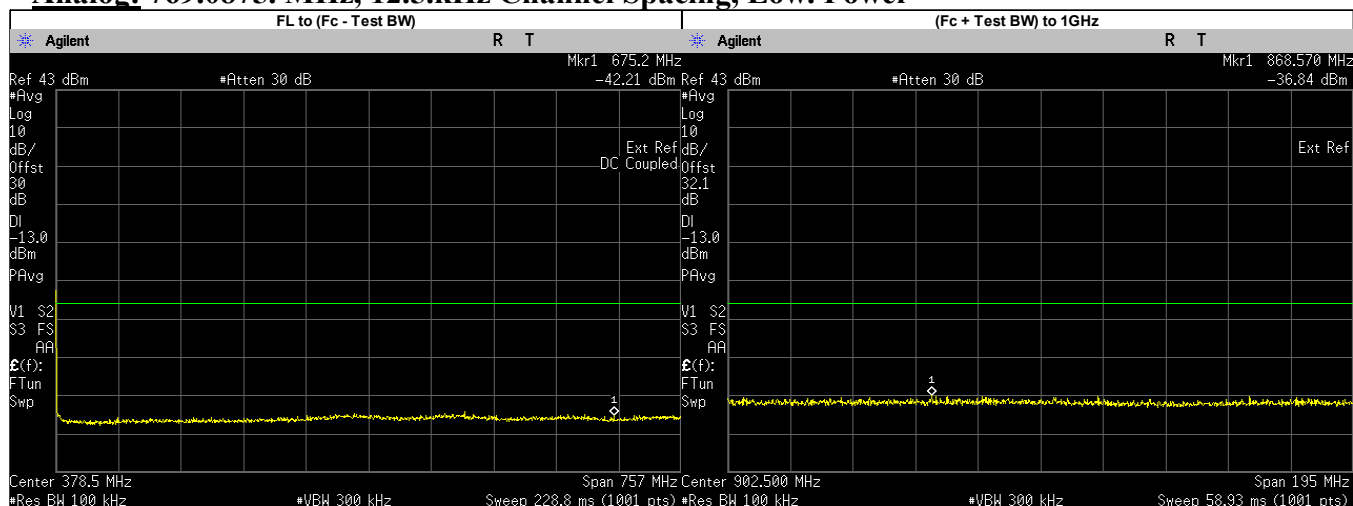



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	675.2000	-42.2140	-13.00	PASS
(Fc + Test BW) to 1GHz	868.5700	-36.8400	-13.00	PASS
1GHz to 2Fc	1275.1180	-53.9000	-13.00	PASS
2Fc to 10Fc	6999.4900	-48.7800	-13.00	PASS
	1538.1750	-54.7676	-13.00	PASS
	2307.2620	-54.3251	-13.00	PASS
	3076.3500	-51.5137	-13.00	PASS
	3845.4370	-52.8144	-13.00	PASS
	4614.5250	-53.1130	-13.00	PASS
	5383.6130	-53.7102	-13.00	PASS
	6152.7000	-53.3224	-13.00	PASS
	6921.7880	-50.0556	-13.00	PASS
	7690.8750	-50.5791	-13.00	PASS

Analog: 774.8875. MHz, 12.5.kHz Channel Spacing, Max. Power

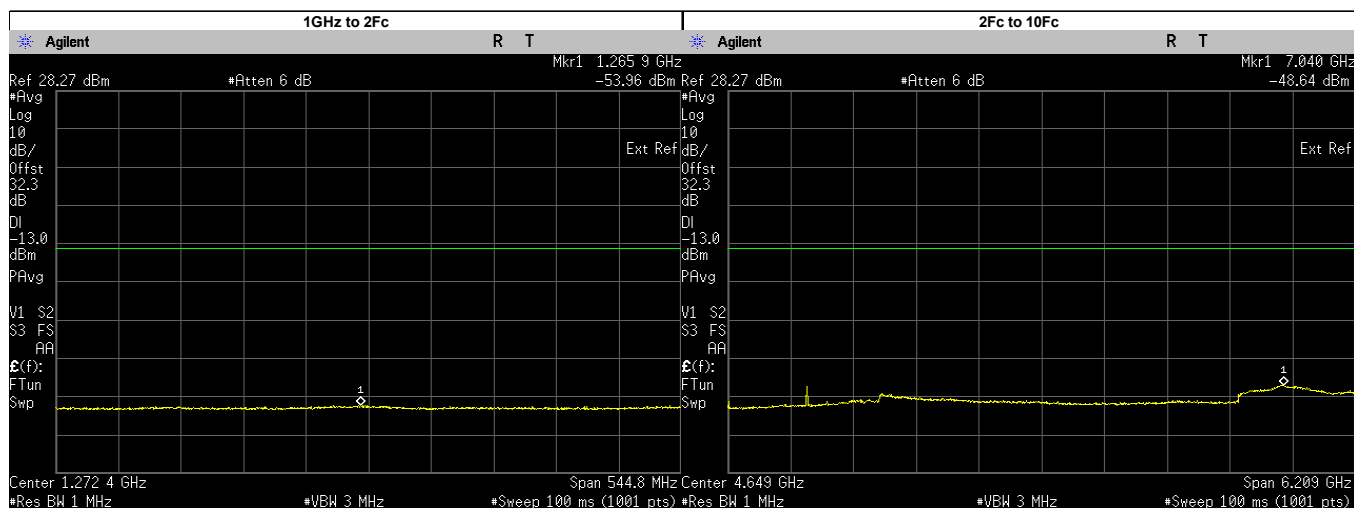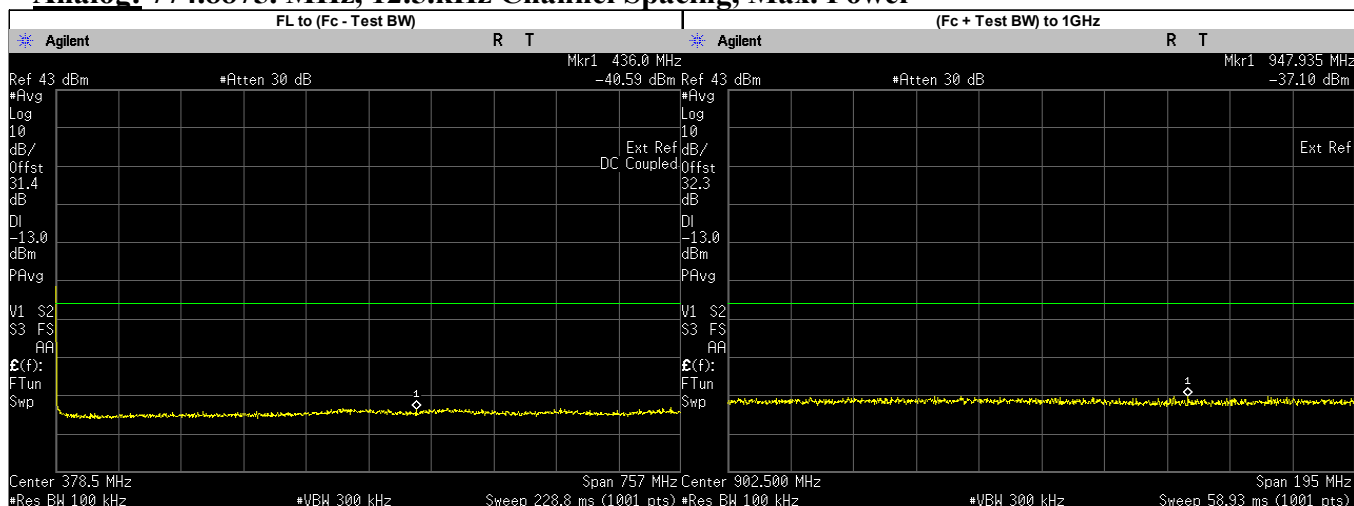

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	436.0000	-40.5920	-13.00	PASS
(Fc + Test BW) to 1GHz	947.9350	-37.1000	-13.00	PASS
1GHz to 2Fc	1265.8500	-53.9600	-13.00	PASS
2Fc to 10Fc	7039.8280	-48.6400	-13.00	PASS
	1549.7750	-53.2811	-13.00	PASS
	2324.6620	-50.7736	-13.00	PASS
	3099.5500	-51.2824	-13.00	PASS
	3874.4370	-52.6450	-13.00	PASS
	4649.3250	-53.2610	-13.00	PASS
	5424.2120	-53.5615	-13.00	PASS
	6199.1000	-53.4209	-13.00	PASS
	6973.9880	-49.2118	-13.00	PASS
	7748.8750	-50.8554	-13.00	PASS



Analog: 774.8875. MHz, 12.5.kHz Channel Spacing, Low. Power

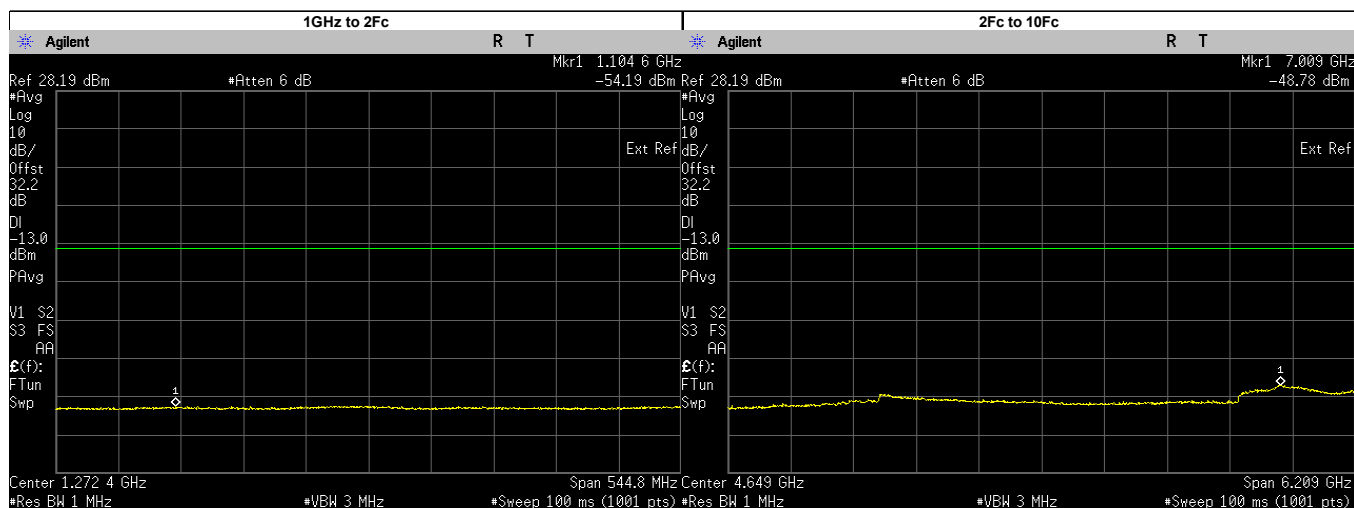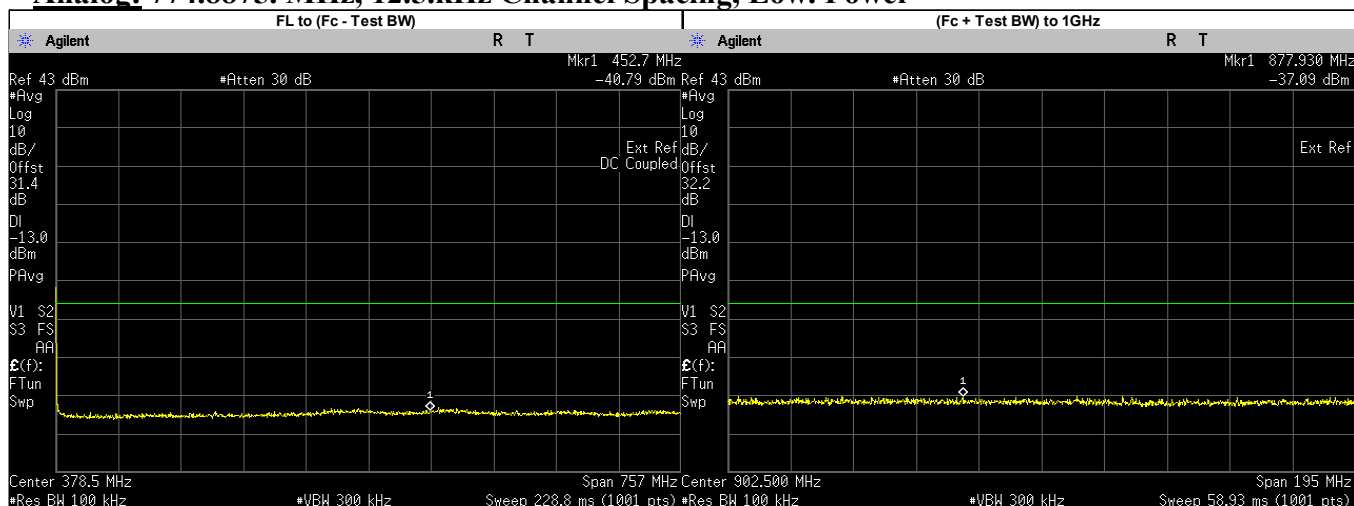

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	452.7000	-40.7900	-13.00	PASS
(Fc + Test BW) to 1GHz	877.9300	-37.0900	-13.00	PASS
1GHz to 2Fc	1104.5970	-54.1900	-13.00	PASS
2Fc to 10Fc	7008.7830	-48.7800	-13.00	PASS
	1549.7750	-54.7481	-13.00	PASS
	2324.6620	-54.0889	-13.00	PASS
	3099.5500	-51.3535	-13.00	PASS
	3874.4370	-52.9204	-13.00	PASS
	4649.3250	-53.3120	-13.00	PASS
	5424.2120	-53.5486	-13.00	PASS
	6199.1000	-53.3367	-13.00	PASS
	6973.9880	-49.1963	-13.00	PASS
	7748.8750	-50.6362	-13.00	PASS

Analog: 794.0125. MHz, 12.5.kHz Channel Spacing, Max. Power



Not for FCC review

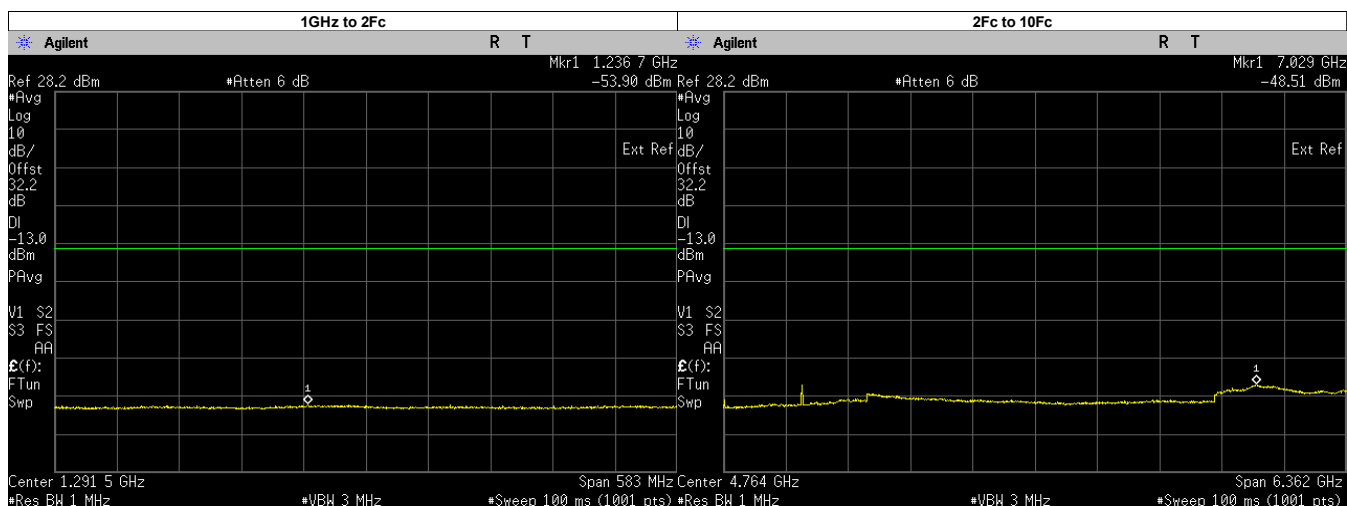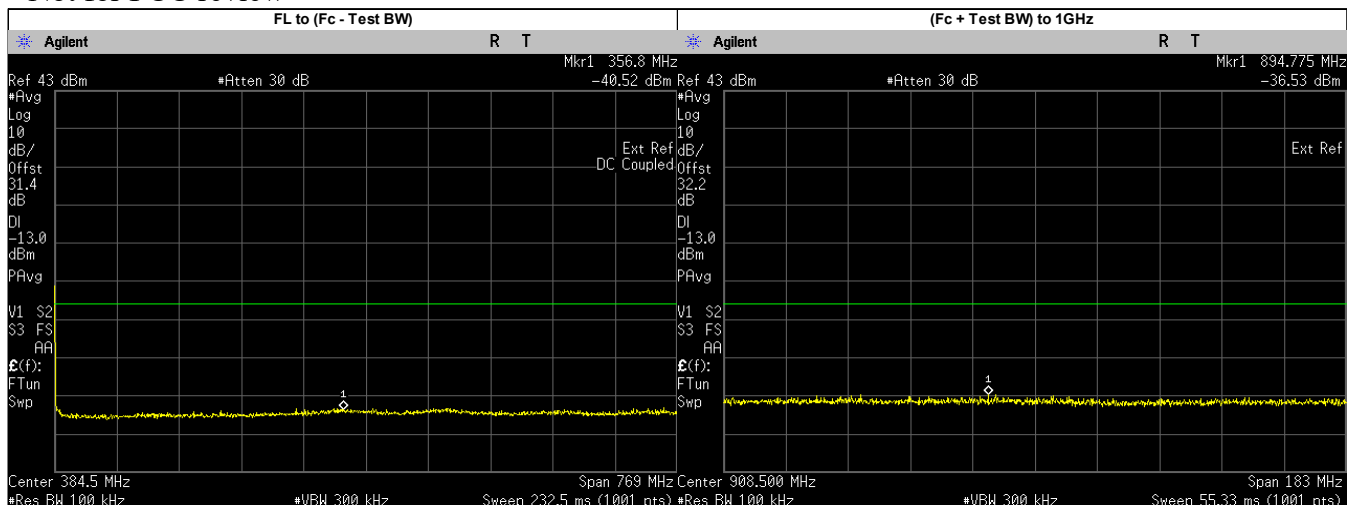

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	356.8000	-40.5210	-13.00	PASS
(Fc + Test BW) to 1GHz	894.7750	-36.5300	-13.00	PASS
1GHz to 2Fc	1236.7080	-53.9000	-13.00	PASS
2Fc to 10Fc	7028.9830	-48.5100	-13.00	PASS
	1588.0250	-53.2320	-13.00	PASS
	2382.0370	-50.3062	-13.00	PASS
	3176.0500	-51.4792	-13.00	PASS
	3970.0620	-53.0461	-13.00	PASS
	4764.0750	-53.3200	-13.00	PASS
	5558.0870	-53.6318	-13.00	PASS
	6352.1000	-53.3188	-13.00	PASS
	7146.1130	-49.2592	-13.00	PASS
	7940.1250	-50.3223	-13.00	PASS



Analog: 794.0125. MHz, 12.5.kHz Channel Spacing, Low. Power

Not for FCC review

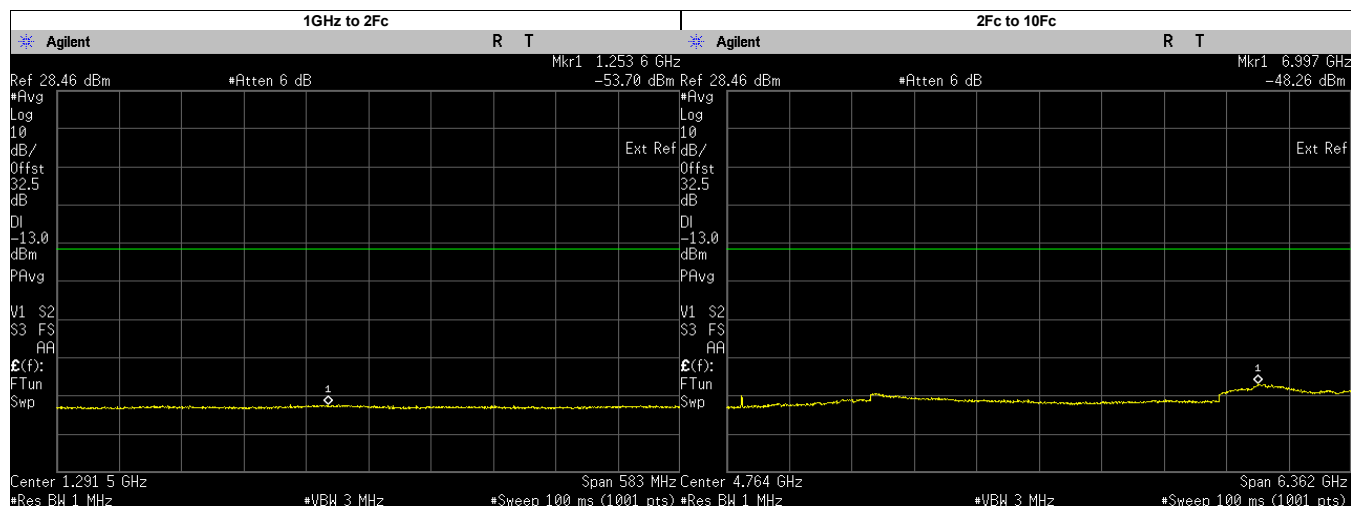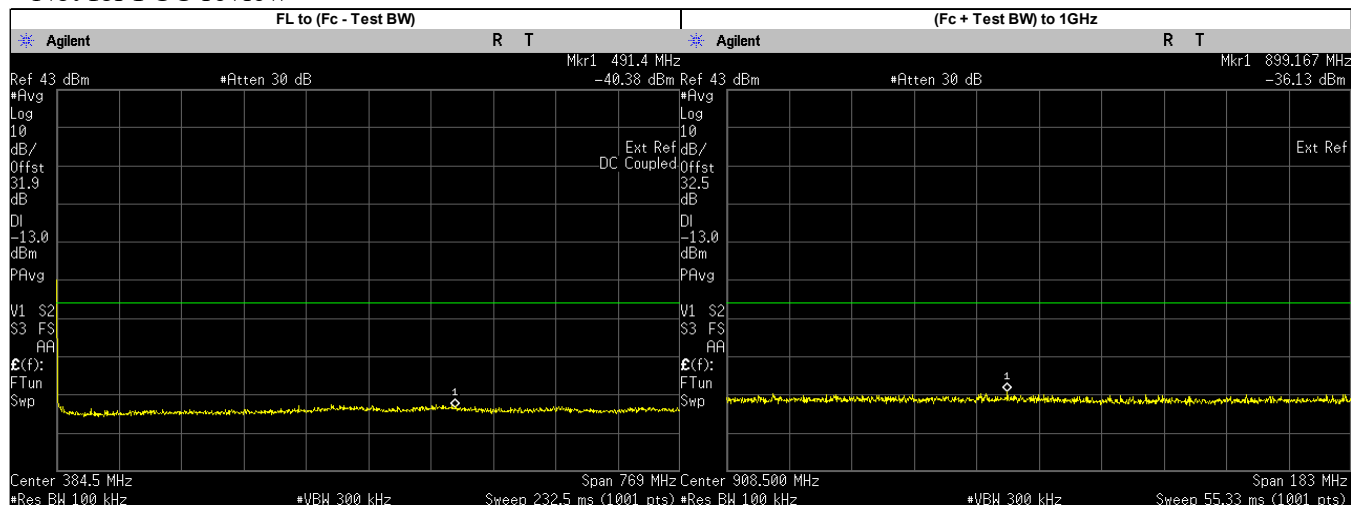



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	491.4000	-40.3810	-13.00	PASS
(Fc + Test BW) to 1GHz	899.1670	-36.1300	-13.00	PASS
1GHz to 2Fc	1253.6160	-53.7000	-13.00	PASS
2Fc to 10Fc	6997.1720	-48.2600	-13.00	PASS
	1588.0250	-54.4894	-13.00	PASS
	2382.0370	-53.9192	-13.00	PASS
	3176.0500	-51.3514	-13.00	PASS
	3970.0620	-52.8324	-13.00	PASS
	4764.0750	-53.4200	-13.00	PASS
	5558.0870	-53.5074	-13.00	PASS
	6352.1000	-53.1227	-13.00	PASS
	7146.1130	-49.1232	-13.00	PASS
	7940.1250	-50.2440	-13.00	PASS

Analog: 799.0875. MHz, 12.5.kHz Channel Spacing, Max. Power

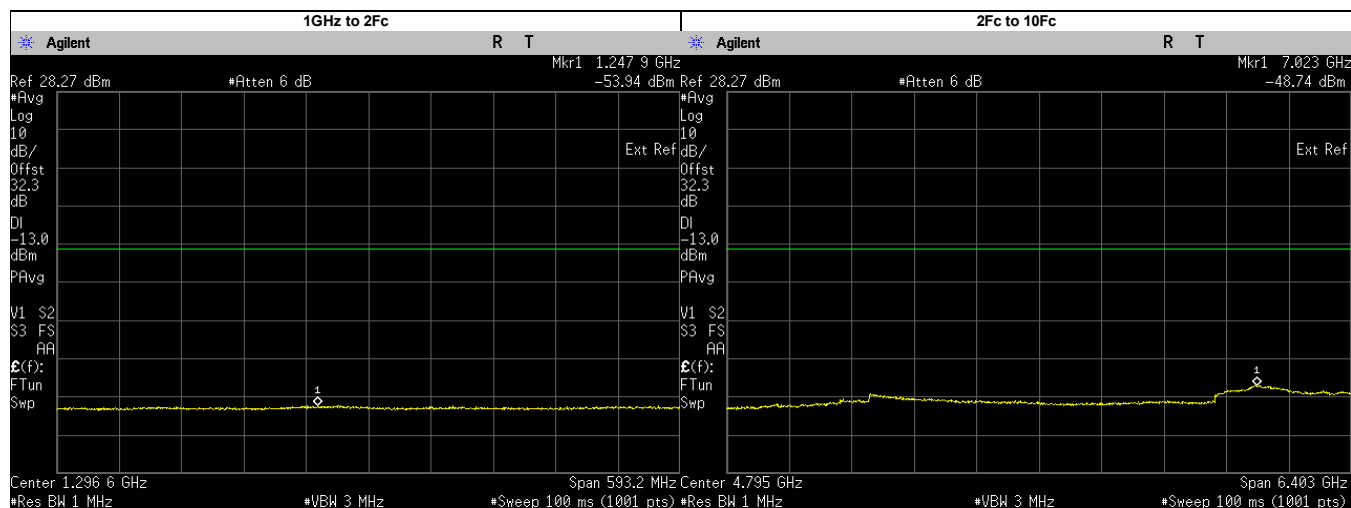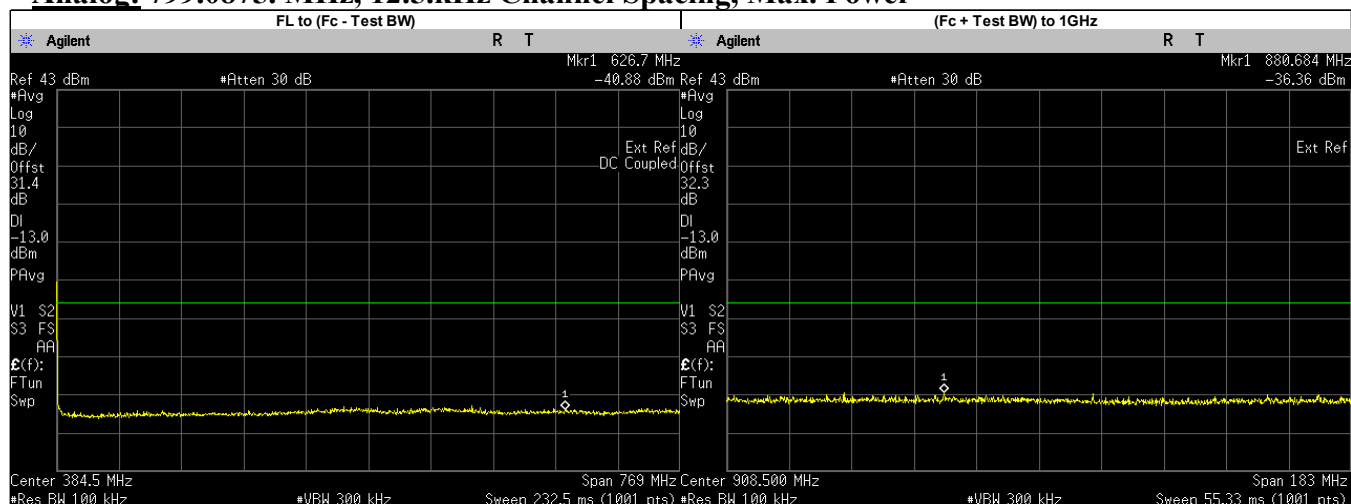



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	626.7000	-40.8800	-13.00	PASS
(Fc + Test BW) to 1GHz	880.6840	-36.3600	-13.00	PASS
1GHz to 2Fc	1247.9470	-53.9400	-13.00	PASS
2Fc to 10Fc	7022.6650	-48.7400	-13.00	PASS
	1598.1750	-54.6362	-13.00	PASS
	2397.2620	-53.8937	-13.00	PASS
	3196.3500	-51.6783	-13.00	PASS
	3995.4370	-53.1297	-13.00	PASS
	4794.5250	-53.5340	-13.00	PASS
	5593.6130	-53.5573	-13.00	PASS
	6392.7000	-53.1196	-13.00	PASS
	7191.7880	-49.4509	-13.00	PASS
	7990.8750	-50.8174	-13.00	PASS

Analog: 799.0875. MHz, 12.5.kHz Channel Spacing, Low. Power

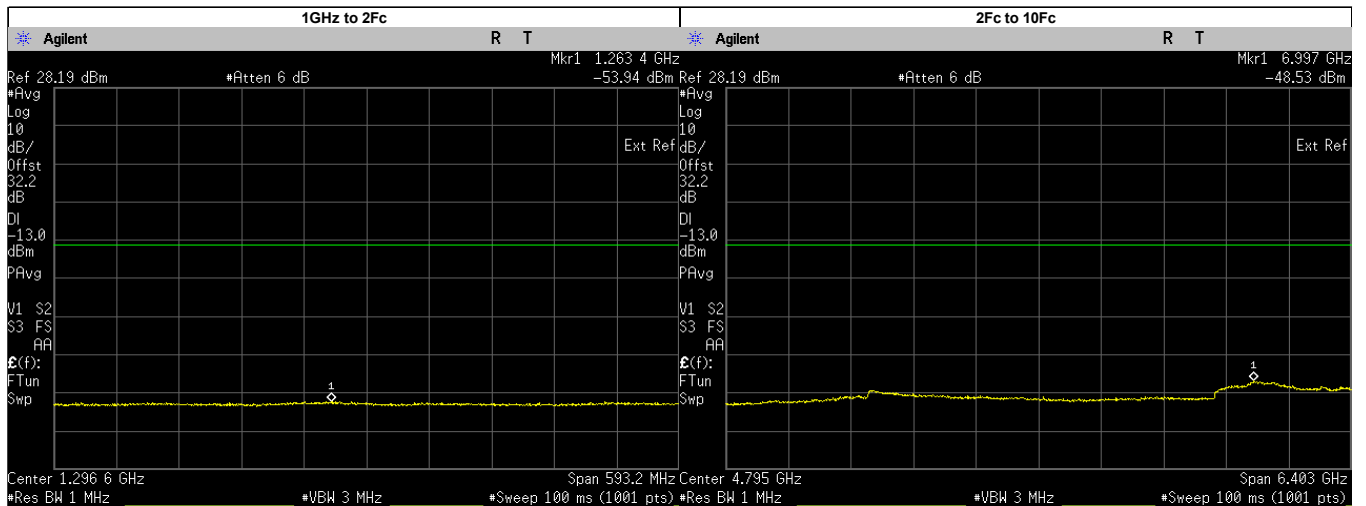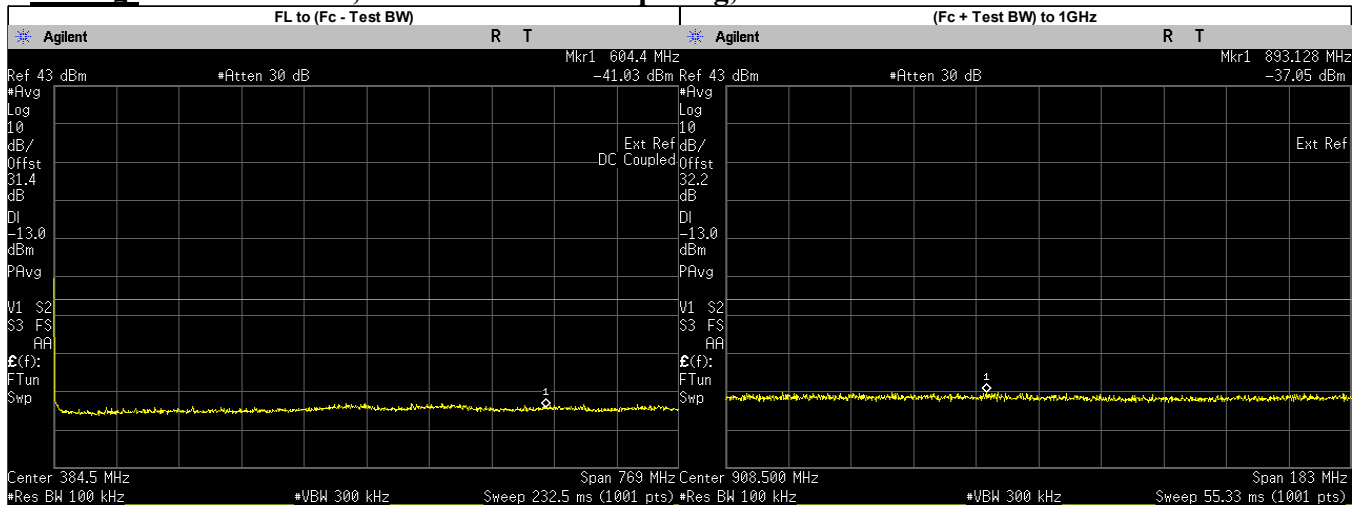



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	604.4000	-41.0300	-13.00	PASS
(Fc + Test BW) to 1GHz	893.1280	-37.0500	-13.00	PASS
1GHz to 2Fc	1263.3700	-53.9500	-13.00	PASS
2Fc to 10Fc	6997.0540	-48.5300	-13.00	PASS
	1598.1750	-54.7250	-13.00	PASS
	2397.2620	-54.1664	-13.00	PASS
	3196.3500	-51.8504	-13.00	PASS
	3995.4370	-52.7960	-13.00	PASS
	4794.5250	-53.3630	-13.00	PASS
	5593.6130	-53.3997	-13.00	PASS
	6392.7000	-53.4598	-13.00	PASS
	7191.7880	-49.1924	-13.00	PASS
	7990.8750	-50.9650	-13.00	PASS

Analog: 804.9125. MHz, 12.5.kHz Channel Spacing, Max. Power

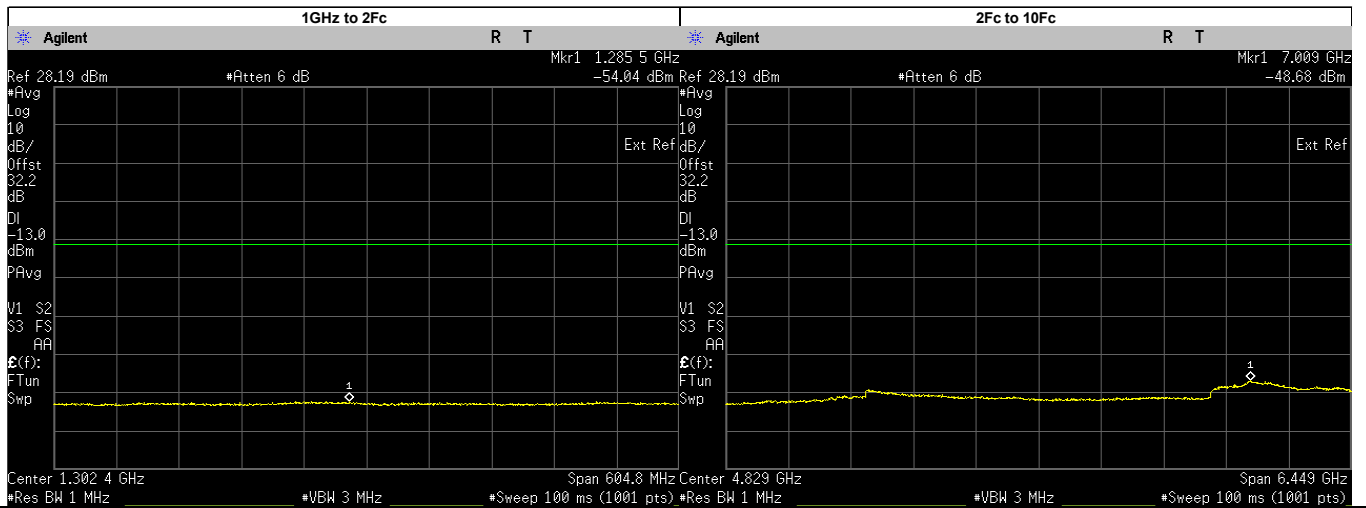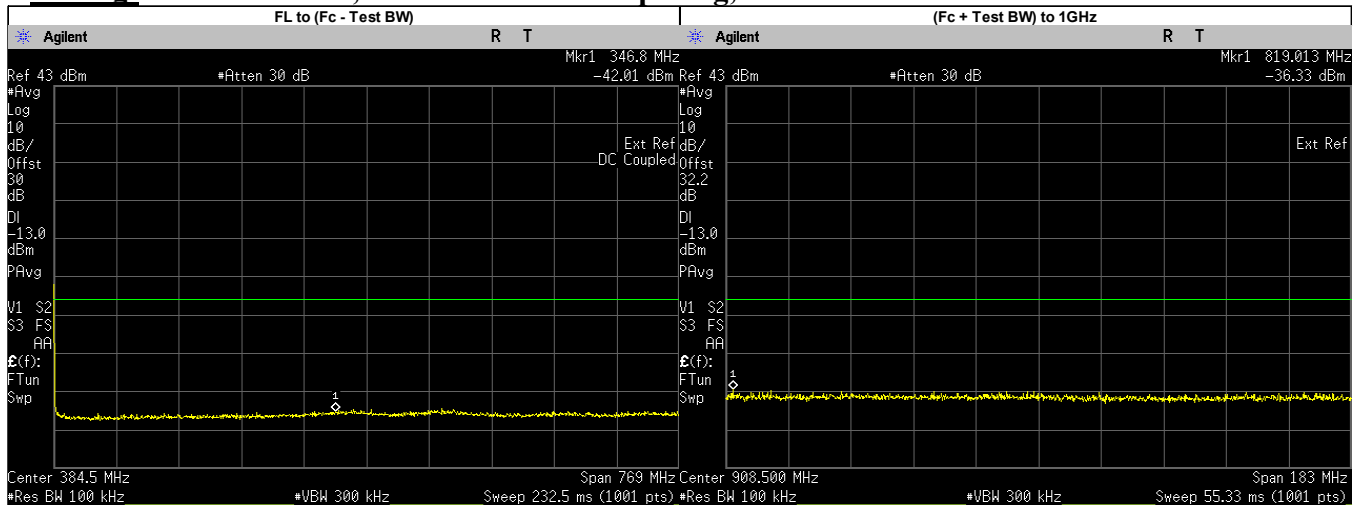

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	346.8000	-42.0080	-13.00	PASS
(Fc + Test BW) to 1GHz	819.0130	-36.3300	-13.00	PASS
1GHz to 2Fc	1285.4770	-54.0500	-13.00	PASS
2Fc to 10Fc	7009.3380	-48.6800	-13.00	PASS
	1609.8250	-54.7005	-13.00	PASS
	2414.7380	-53.8651	-13.00	PASS
	3219.6500	-51.9684	-13.00	PASS
	4024.5620	-53.1540	-13.00	PASS
	4829.4750	-53.6950	-13.00	PASS
	5634.3870	-53.5858	-13.00	PASS
	6439.3000	-53.4277	-13.00	PASS
	7244.2120	-49.6184	-13.00	PASS
	8049.1250	-51.3604	-13.00	PASS

Analog: 804.9125. MHz, 12.5.kHz Channel Spacing, Low. Power

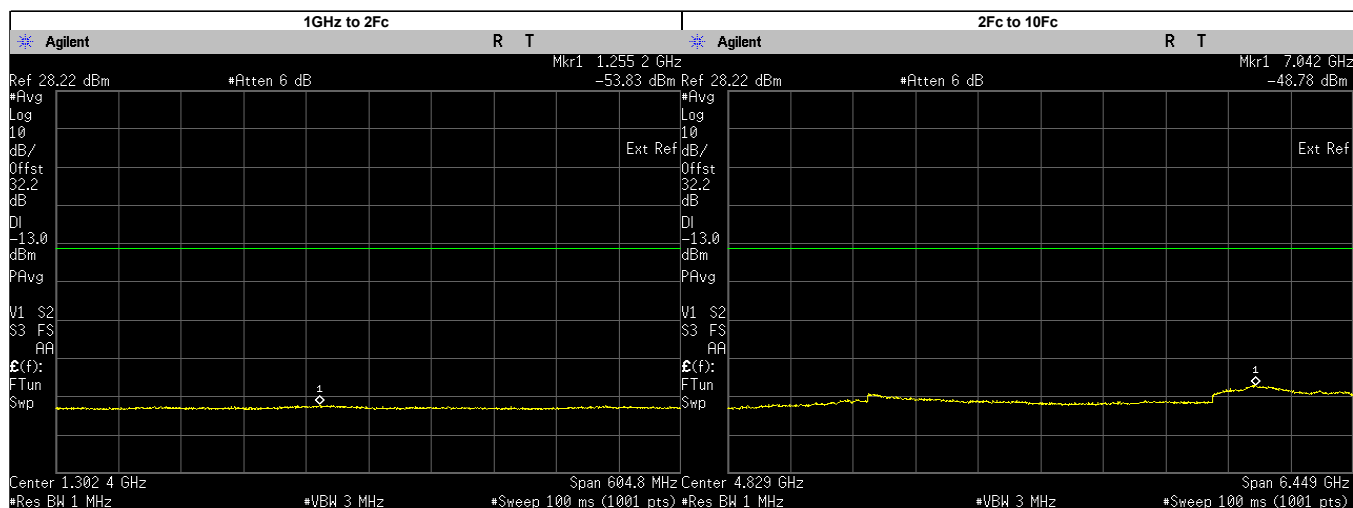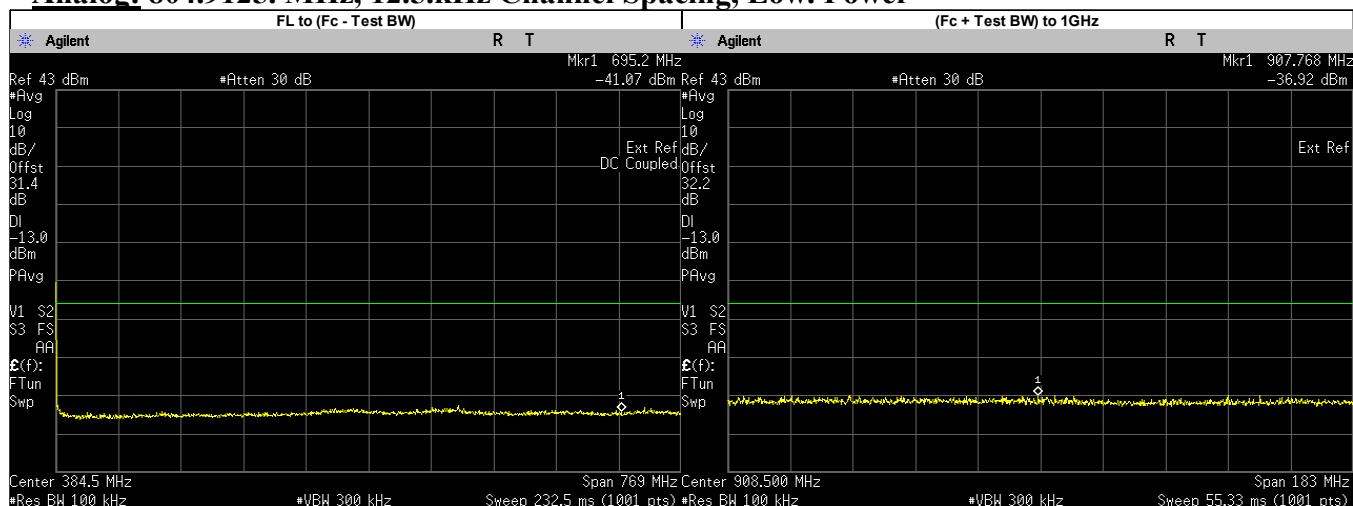


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	695.2000	-41.0730	-13.00	PASS
(Fc + Test BW) to 1GHz	907.7680	-36.9200	-13.00	PASS
1GHz to 2Fc	1255.2360	-53.8300	-13.00	PASS
2Fc to 10Fc	7041.5850	-48.7800	-13.00	PASS
	1609.8250	-54.7027	-13.00	PASS
	2414.7380	-53.9481	-13.00	PASS
	3219.6500	-51.7945	-13.00	PASS
	4024.5620	-53.0043	-13.00	PASS
	4829.4750	-53.3100	-13.00	PASS
	5634.3870	-53.4192	-13.00	PASS
	6439.3000	-53.2827	-13.00	PASS
	7244.2120	-49.5788	-13.00	PASS
	8049.1250	-51.4131	-13.00	PASS

6.10.3. Test Result (Digital)



Digital: 764.0125. MHz, 12.5 kHz Channel Spacing, Max. Power

Not for FCC review

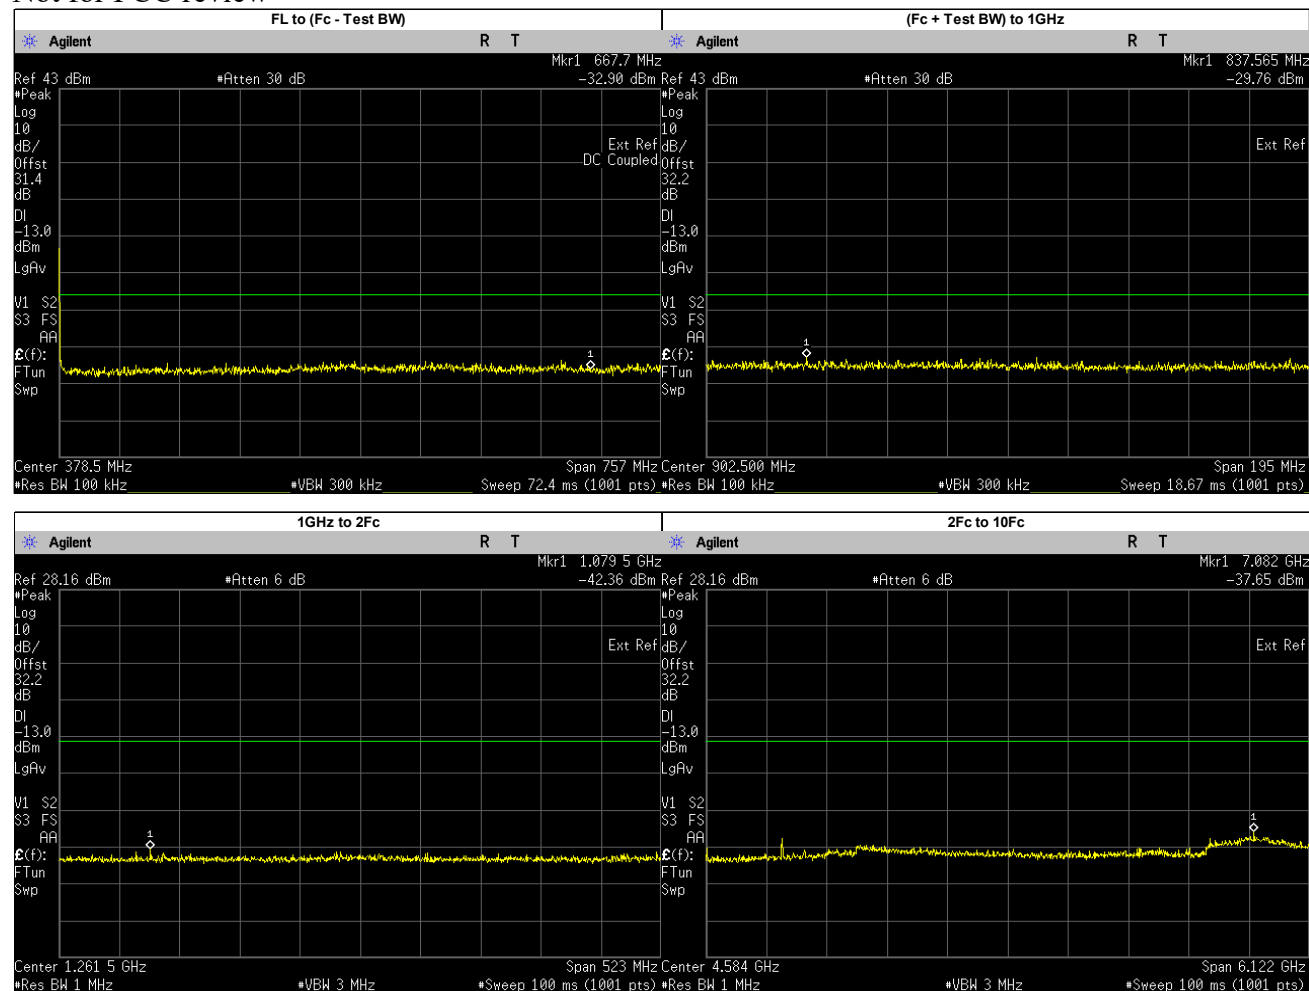



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	667.7000	-32.9030	-13.00	PASS
(Fc + Test BW) to 1GHz	837.5650	-29.7600	-13.00	PASS
1GHz to 2Fc	1079.5000	-42.3600	-13.00	PASS
2Fc to 10Fc	7081.8920	-37.6500	-13.00	PASS
	1528.0250	-42.6350	-13.00	PASS
	2292.0370	-40.5573	-13.00	PASS
	3056.0500	-41.6929	-13.00	PASS
	3820.0620	-43.1173	-13.00	PASS
	4584.0750	-43.3820	-13.00	PASS
	5348.0870	-43.9902	-13.00	PASS
	6112.1000	-43.4240	-13.00	PASS
	6876.1130	-40.5856	-13.00	PASS
	7640.1250	-41.0457	-13.00	PASS

Digital: 764.0125. MHz, 12.5 kHz Channel Spacing, Low. Power
Not for FCC review

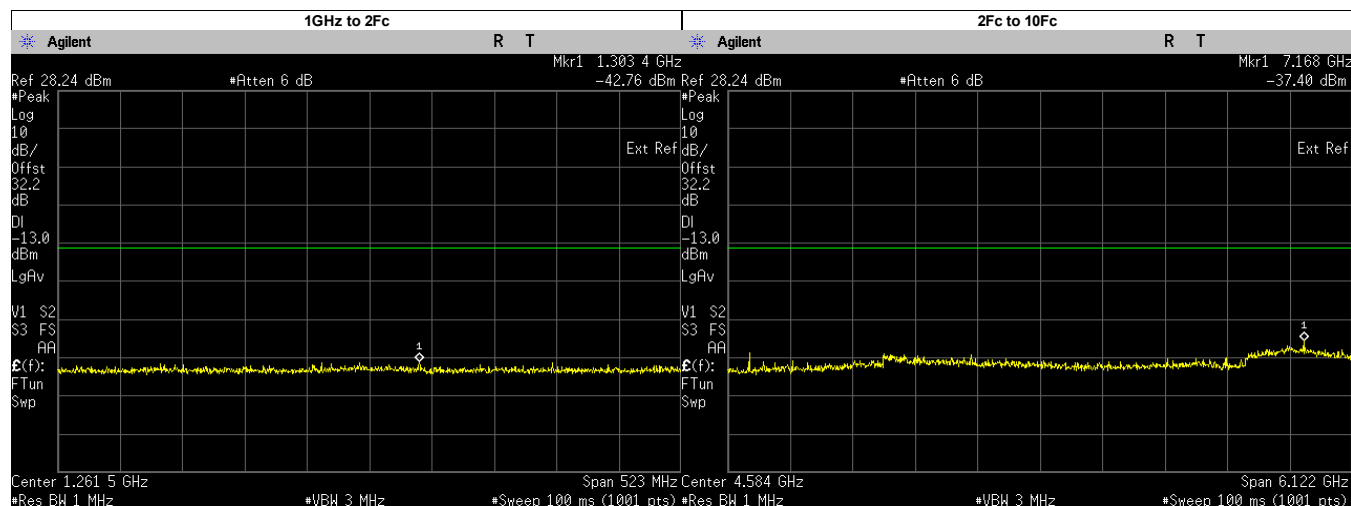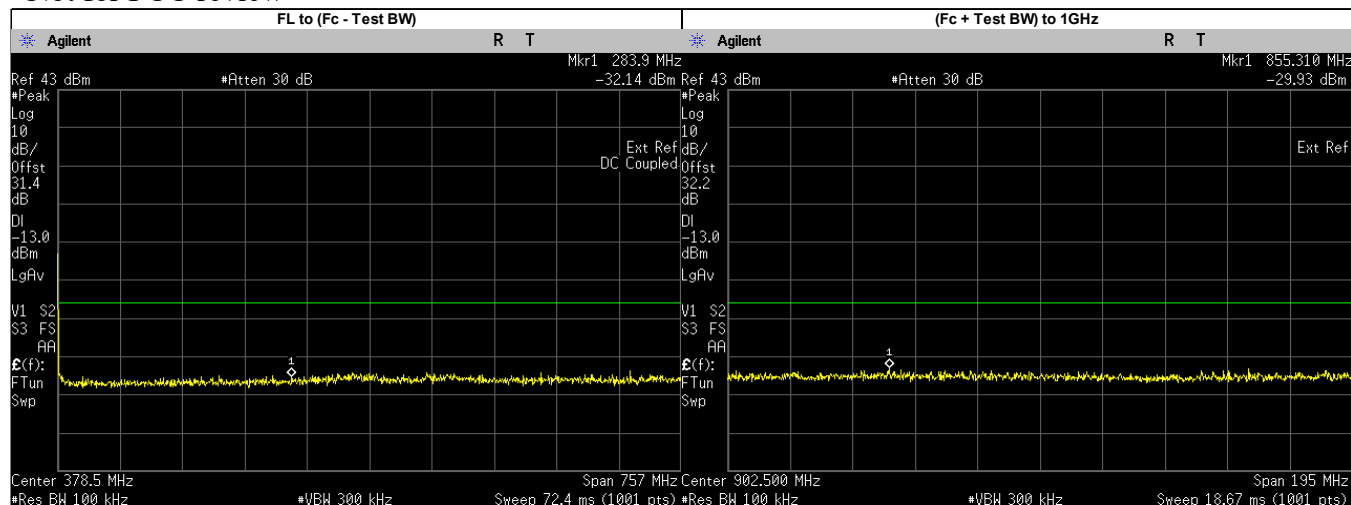



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	283.9000	-32.1390	-13.00	PASS
(Fc + Test BW) to 1GHz	855.3100	-29.9300	-13.00	PASS
1GHz to 2Fc	1303.3540	-42.7600	-13.00	PASS
2Fc to 10Fc	7167.6010	-37.4000	-13.00	PASS
	1528.0250	-44.9265	-13.00	PASS
	2292.0370	-44.6617	-13.00	PASS
	3056.0500	-41.3938	-13.00	PASS
	3820.0620	-42.9159	-13.00	PASS
	4584.0750	-43.6880	-13.00	PASS
	5348.0870	-44.3062	-13.00	PASS
	6112.1000	-42.8148	-13.00	PASS
	6876.1130	-40.1465	-13.00	PASS
	7640.1250	-40.3850	-13.00	PASS

Digital: 769.0125. MHz, 12.5 kHz Channel Spacing, Max. Power

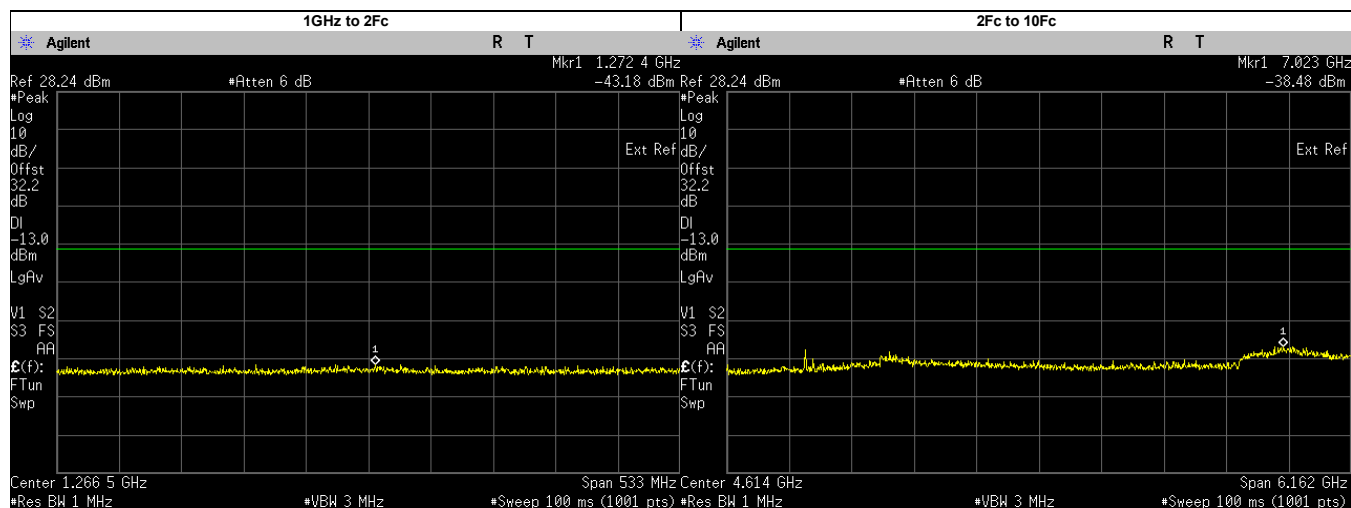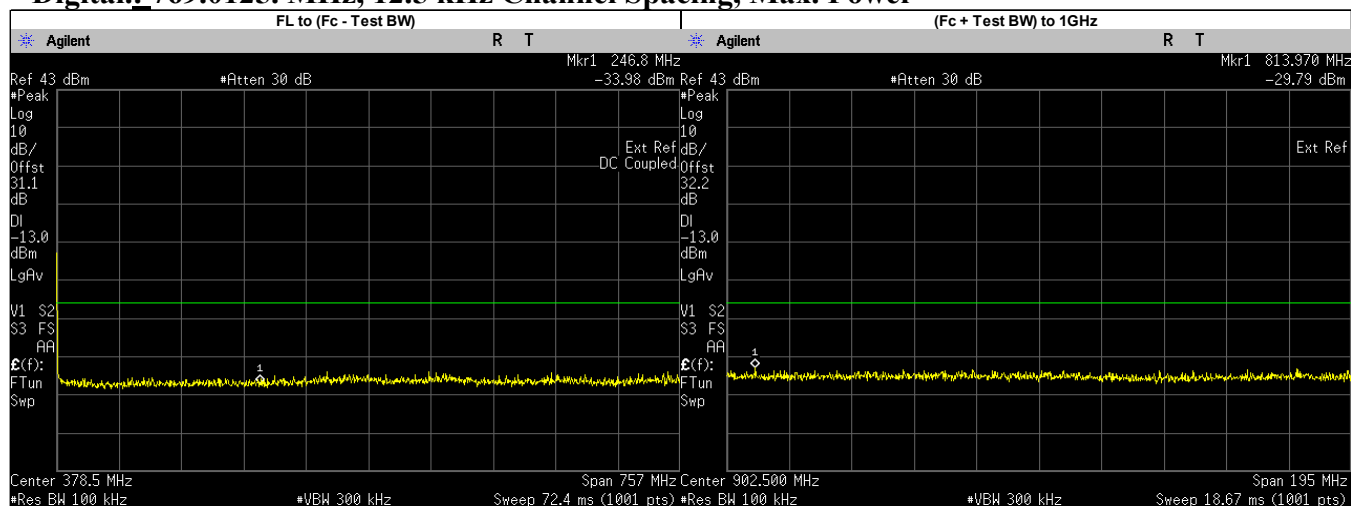



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	246.8000	-33.9790	-13.00	PASS
(Fc + Test BW) to 1GHz	813.9700	-29.7900	-13.00	PASS
1GHz to 2Fc	1272.3760	-43.1800	-13.00	PASS
2Fc to 10Fc	7023.4560	-38.4800	-13.00	PASS
	1538.0250	-43.5496	-13.00	PASS
	2307.0370	-40.7723	-13.00	PASS
	3076.0500	-41.7676	-13.00	PASS
	3845.0620	-43.4565	-13.00	PASS
	4614.0750	-42.9520	-13.00	PASS
	5383.0870	-44.2363	-13.00	PASS
	6152.1000	-43.6529	-13.00	PASS
	6921.1130	-40.6398	-13.00	PASS
	7690.1250	-40.9814	-13.00	PASS

Digital.: 769.0875. MHz, 12.5 kHz Channel Spacing, Max. Power

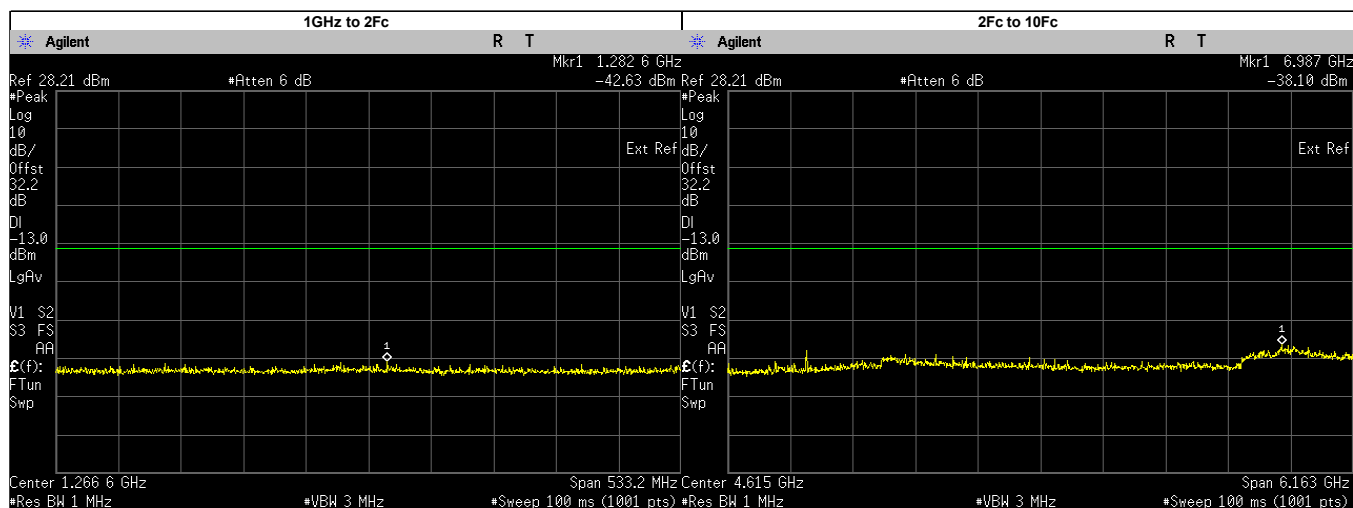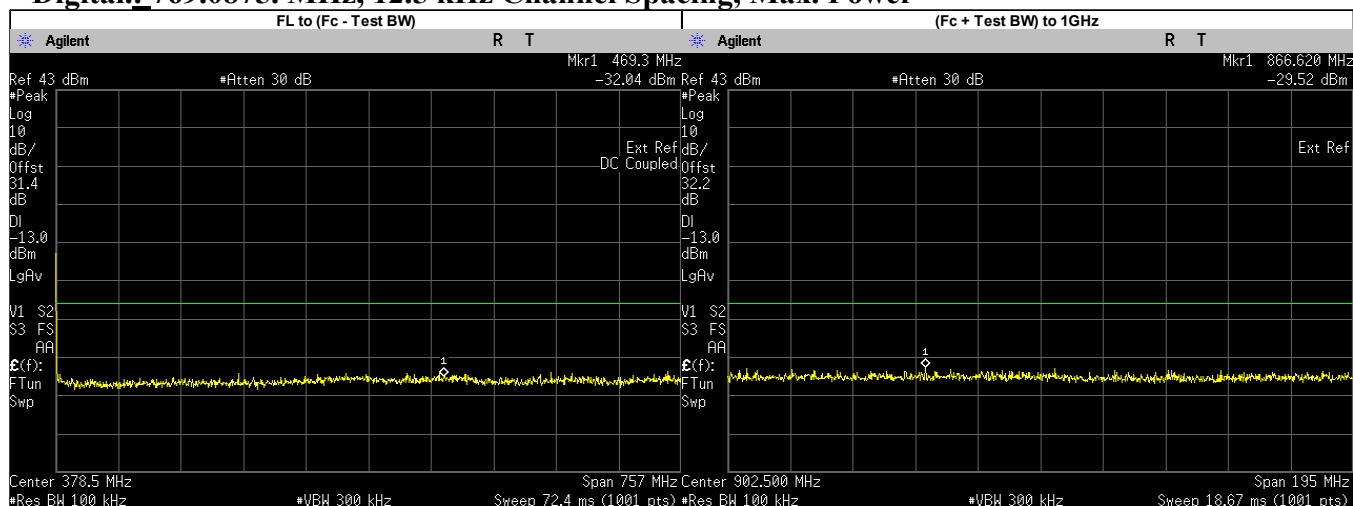



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	469.3000	-32.0380	-13.00	PASS
(Fc + Test BW) to 1GHz	866.6200	-29.5200	-13.00	PASS
1GHz to 2Fc	1282.5830	-42.6300	-13.00	PASS
2Fc to 10Fc	6987.1640	-38.1000	-13.00	PASS
	1538.1750	-43.5069	-13.00	PASS
	2307.2620	-40.8843	-13.00	PASS
	3076.3500	-42.1624	-13.00	PASS
	3845.4370	-42.7488	-13.00	PASS
	4614.5250	-43.5810	-13.00	PASS
	5383.6130	-43.9420	-13.00	PASS
	6152.7000	-44.0604	-13.00	PASS
	6921.7880	-40.7435	-13.00	PASS
	7690.8750	-41.6552	-13.00	PASS

Digital.: 769.0875. MHz, 12.5 kHz Channel Spacing, Low. Power

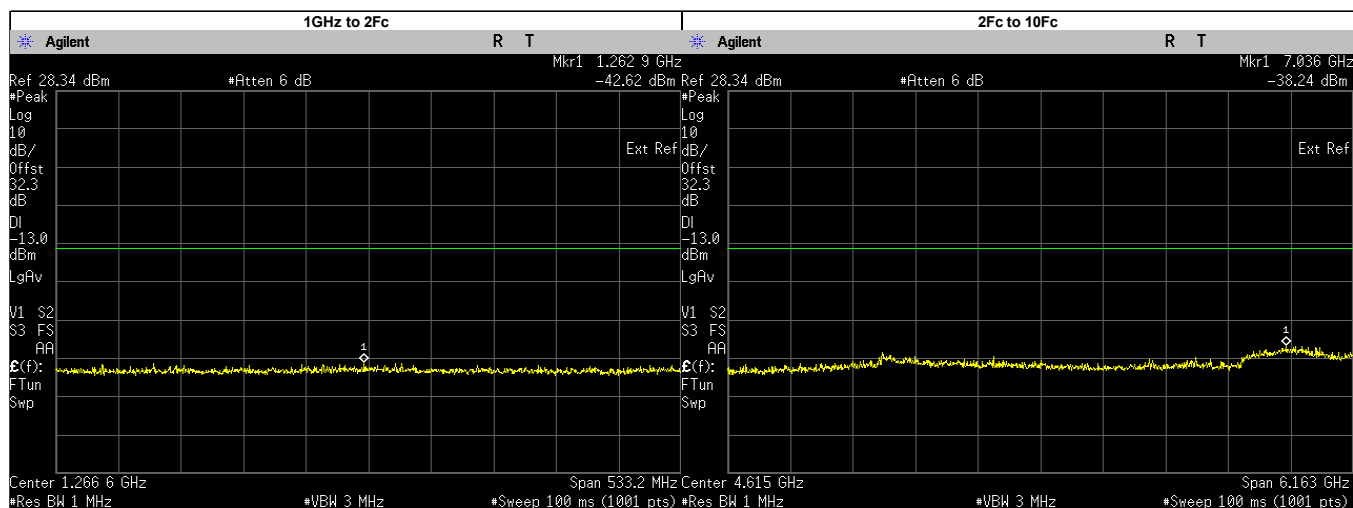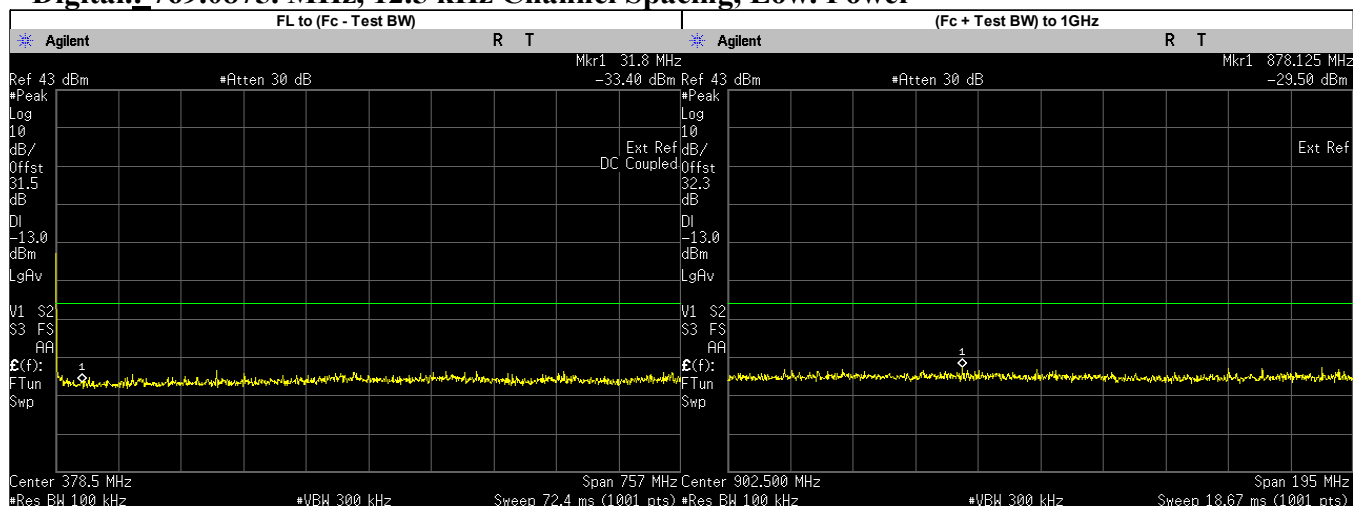



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	31.8000	-33.3960	-13.00	PASS
(Fc + Test BW) to 1GHz	878.1250	-29.5000	-13.00	PASS
1GHz to 2Fc	1262.8550	-42.6200	-13.00	PASS
2Fc to 10Fc	7036.4660	-38.2400	-13.00	PASS
	1538.1750	-45.3984	-13.00	PASS
	2307.2620	-44.5661	-13.00	PASS
	3076.3500	-41.5268	-13.00	PASS
	3845.4370	-42.9030	-13.00	PASS
	4614.5250	-44.2000	-13.00	PASS
	5383.6130	-43.6822	-13.00	PASS
	6152.7000	-43.4628	-13.00	PASS
	6921.7880	-40.1335	-13.00	PASS
	7690.8750	-40.8340	-13.00	PASS

Digital.: 774.8875. MHz, 12.5 kHz Channel Spacing, Max. Power

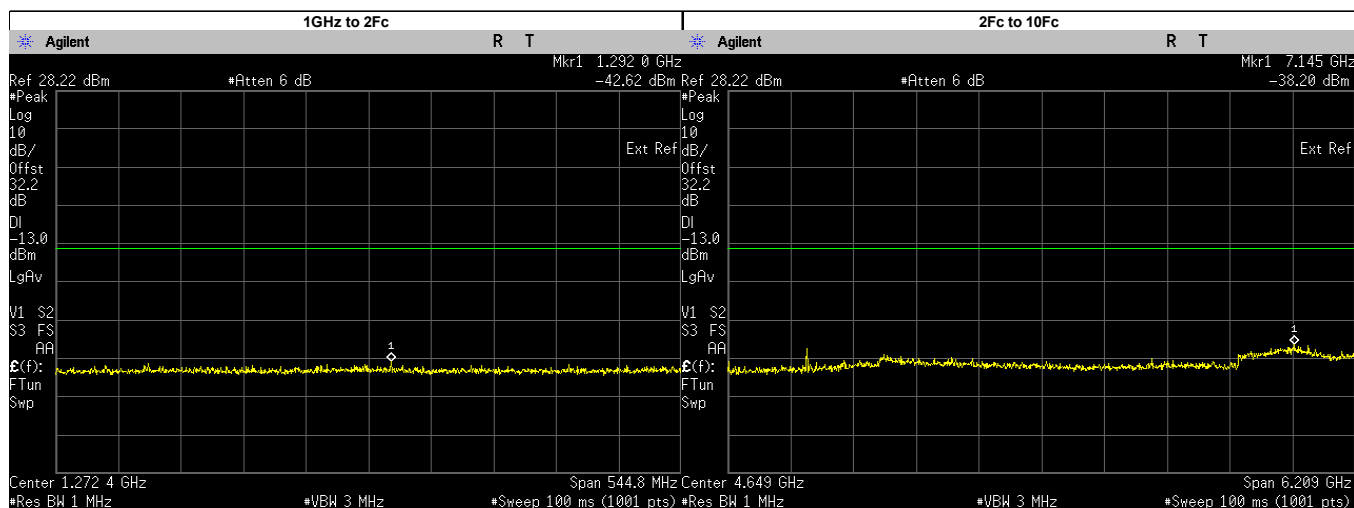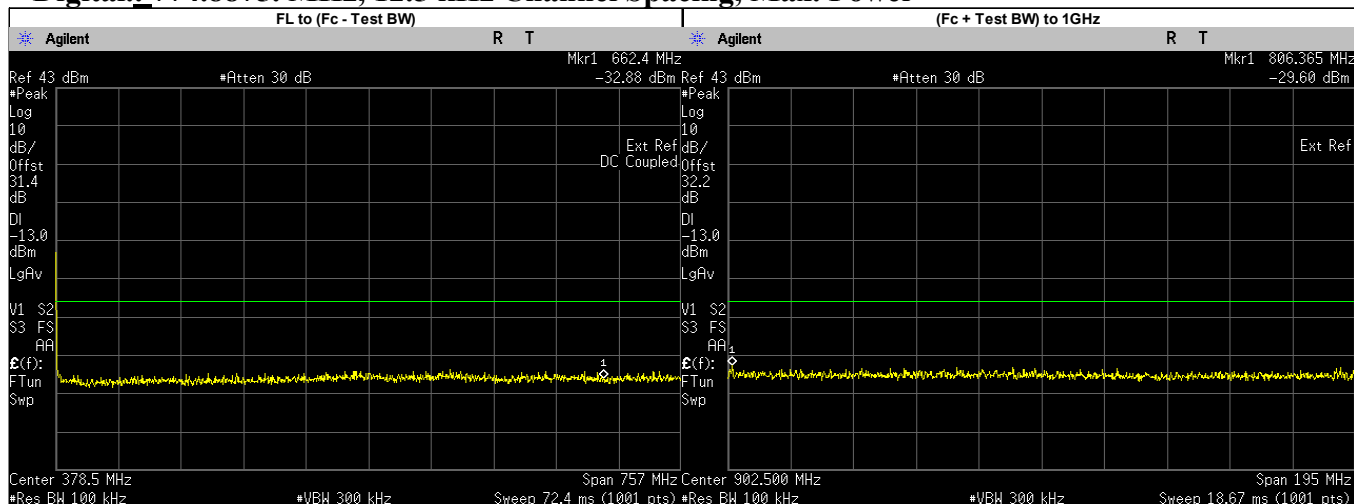



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	662.4000	-32.8750	-13.00	PASS
(Fc + Test BW) to 1GHz	806.3650	-29.6000	-13.00	PASS
1GHz to 2Fc	1291.9990	-42.6200	-13.00	PASS
2Fc to 10Fc	7145.3830	-38.2000	-13.00	PASS
	1549.7750	-42.9626	-13.00	PASS
	2324.6620	-40.5712	-13.00	PASS
	3099.5500	-41.8947	-13.00	PASS
	3874.4370	-43.1516	-13.00	PASS
	4649.3250	-43.7990	-13.00	PASS
	5424.2120	-44.4008	-13.00	PASS
	6199.1000	-44.3567	-13.00	PASS
	6973.9880	-39.6077	-13.00	PASS
	7748.8750	-41.7659	-13.00	PASS

Digital: 774.8875. MHz, 12.5 kHz Channel Spacing, Low. Power

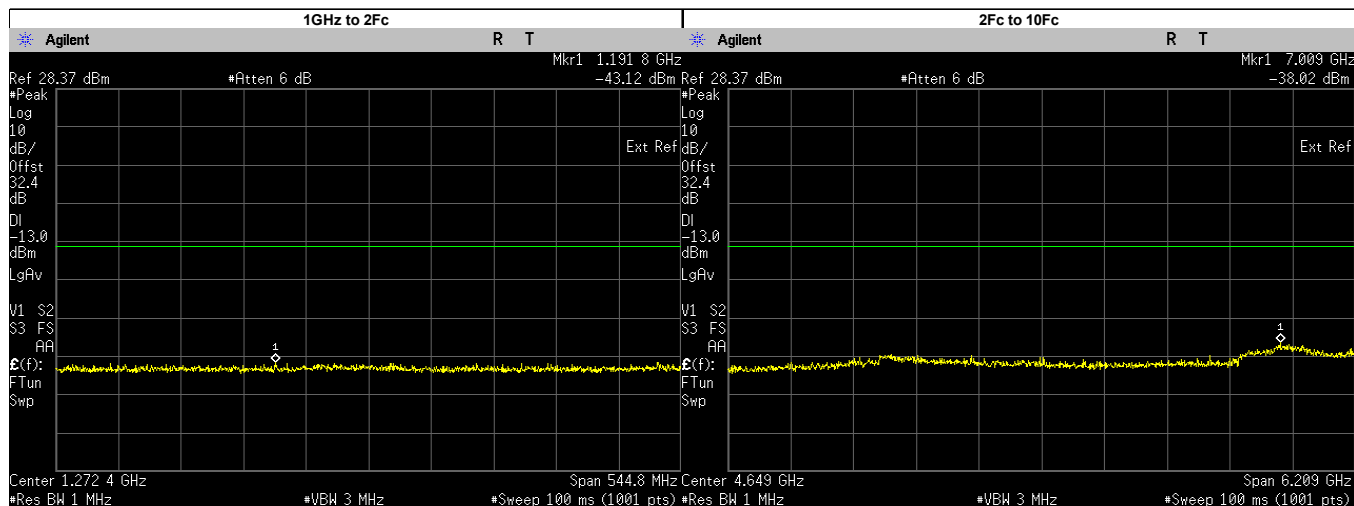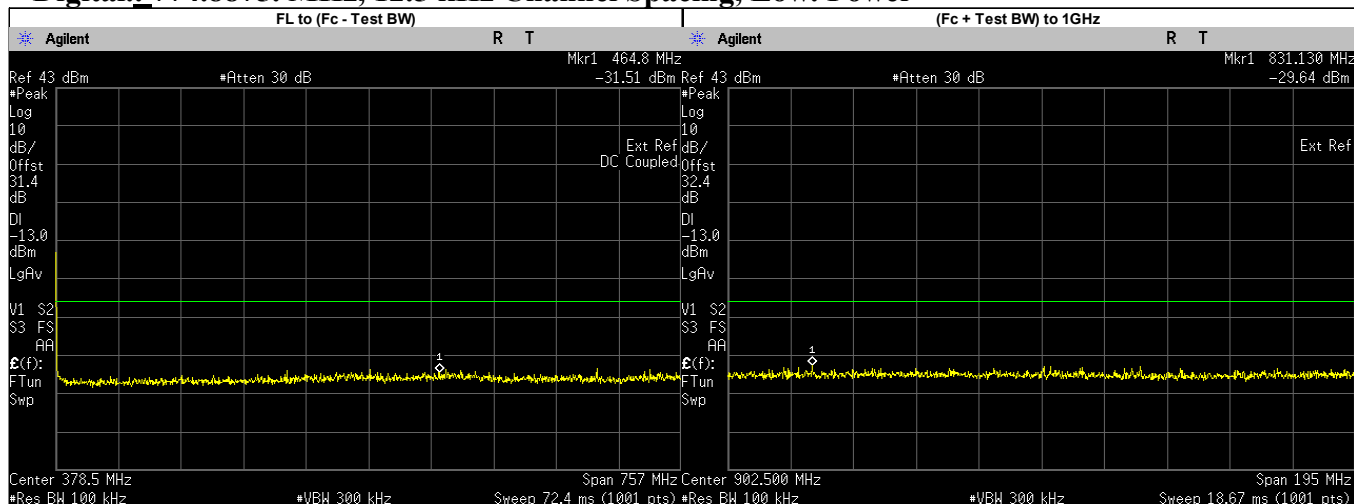



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	464.8000	-31.5130	-13.00	PASS
(Fc + Test BW) to 1GHz	831.1300	-29.6400	-13.00	PASS
1GHz to 2Fc	1191.7610	-43.1200	-13.00	PASS
2Fc to 10Fc	7008.7830	-38.0200	-13.00	PASS
	1549.7750	-45.4780	-13.00	PASS
	2324.6620	-44.9246	-13.00	PASS
	3099.5500	-41.4720	-13.00	PASS
	3874.4370	-43.1092	-13.00	PASS
	4649.3250	-43.4410	-13.00	PASS
	5424.2120	-44.0300	-13.00	PASS
	6199.1000	-43.8361	-13.00	PASS
	6973.9880	-39.1815	-13.00	PASS
	7748.8750	-41.0307	-13.00	PASS

Digital: 794.0125. MHz, 12.5 kHz Channel Spacing, Max. Power
Not for FCC review

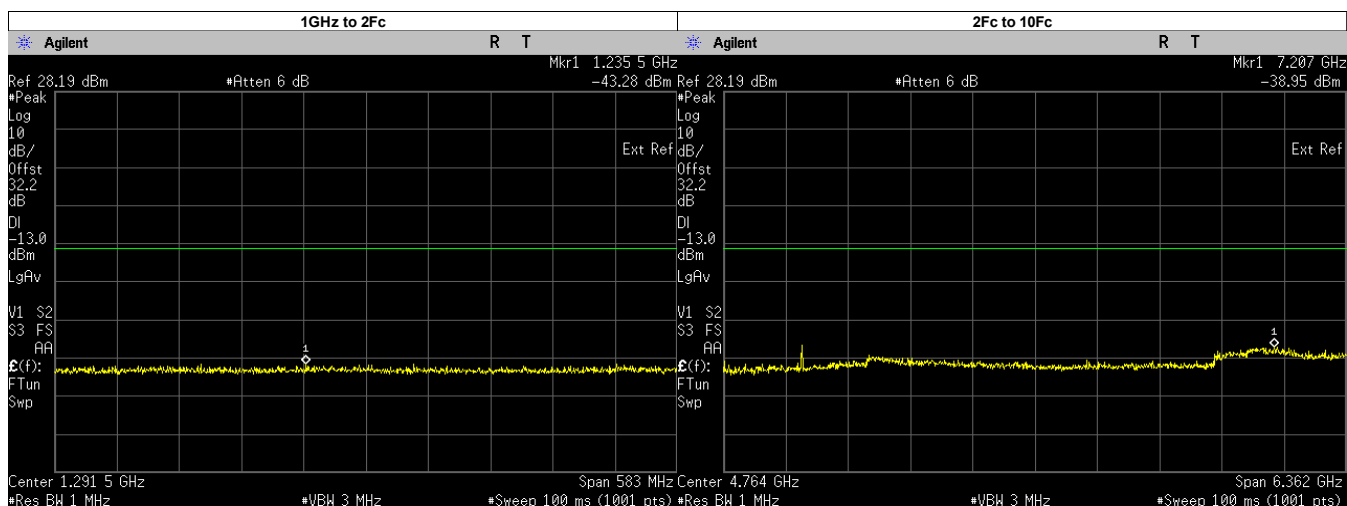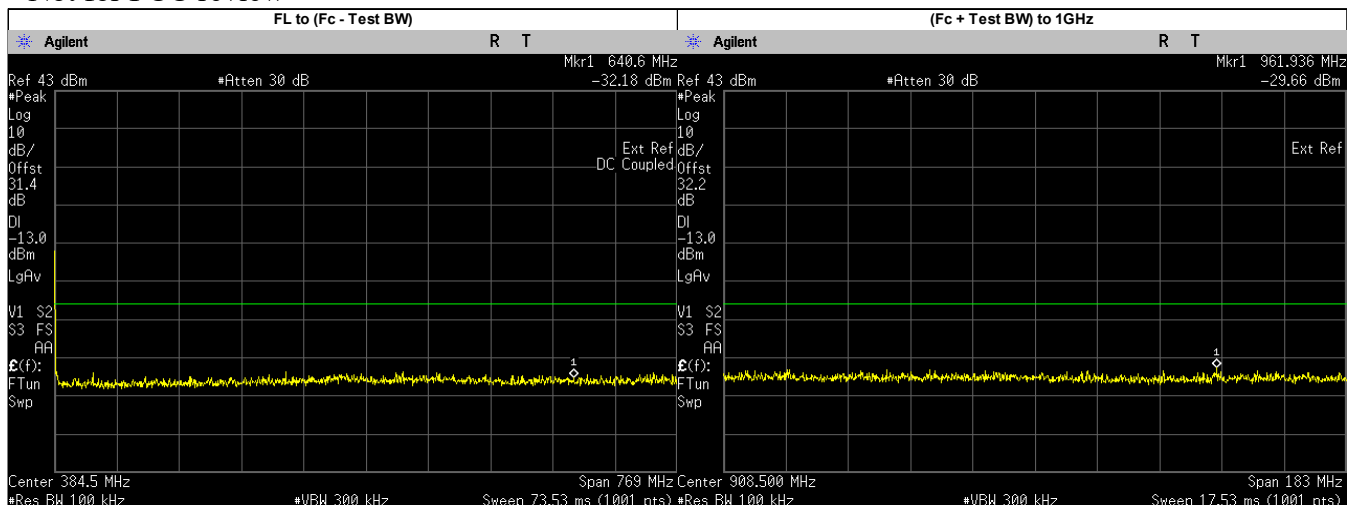



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	640.6000	-32.1790	-13.00	PASS
(Fc + Test BW) to 1GHz	961.9360	-29.6600	-13.00	PASS
1GHz to 2Fc	1235.5420	-43.2800	-13.00	PASS
2Fc to 10Fc	7207.1210	-38.9500	-13.00	PASS
	1588.0250	-43.2153	-13.00	PASS
	2382.0370	-39.8287	-13.00	PASS
	3176.0500	-42.1495	-13.00	PASS
	3970.0620	-43.1456	-13.00	PASS
	4764.0750	-44.5310	-13.00	PASS
	5558.0870	-44.6946	-13.00	PASS
	6352.1000	-44.3786	-13.00	PASS
	7146.1130	-40.4027	-13.00	PASS
	7940.1250	-40.9101	-13.00	PASS

Digital: 794.0125. MHz, 12.5 kHz Channel Spacing, Low. Power
Not for FCC review

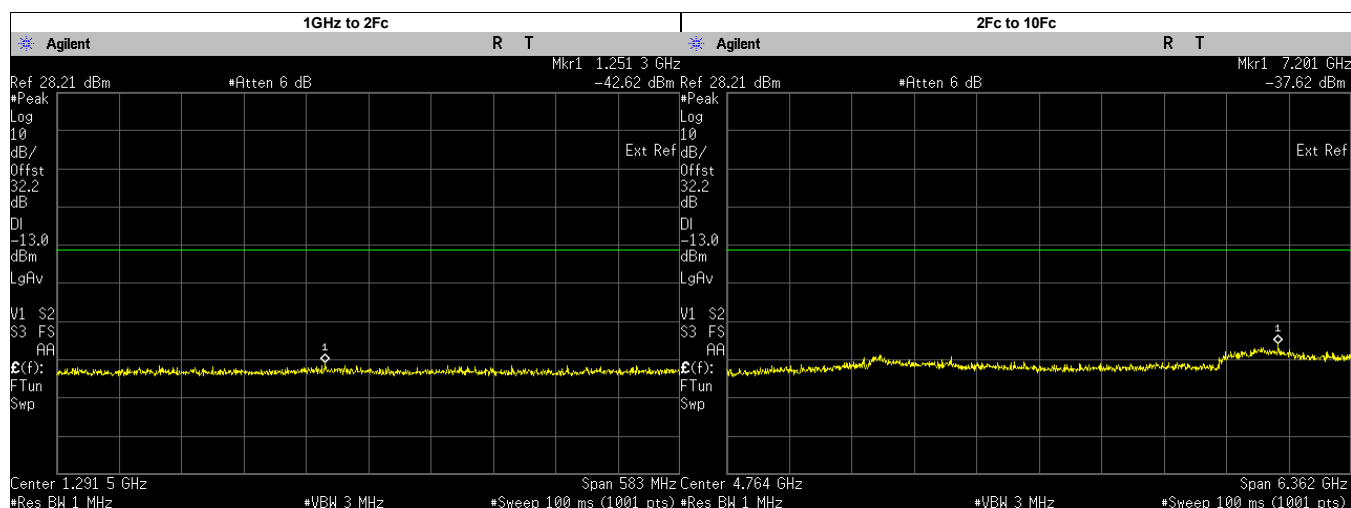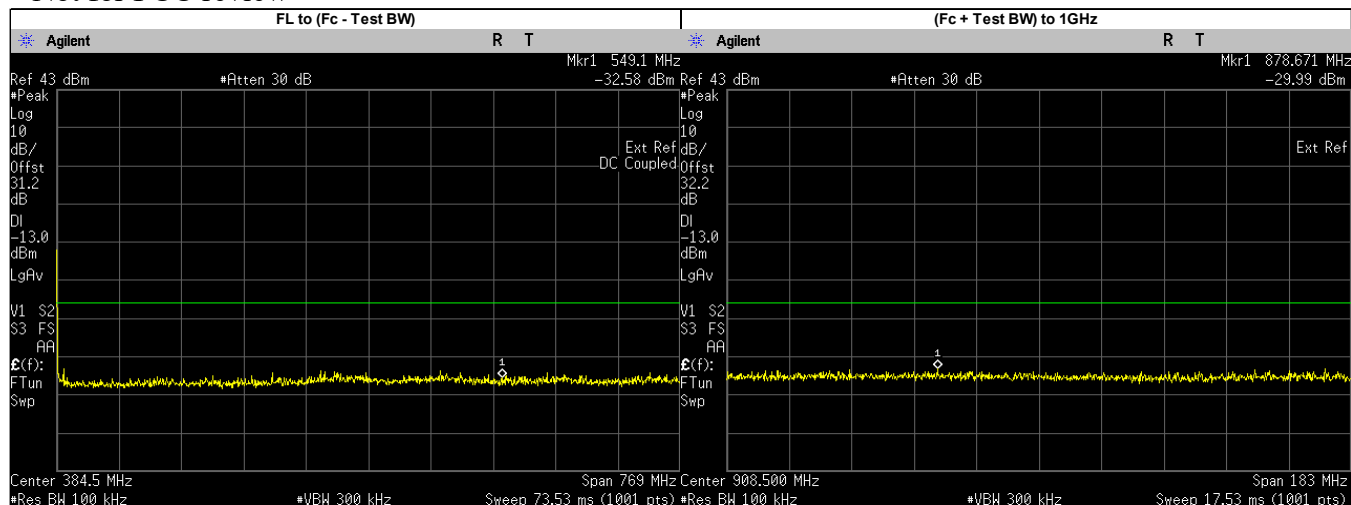



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	549.1000	-32.5840	-13.00	PASS
(Fc + Test BW) to 1GHz	878.6710	-29.9900	-13.00	PASS
1GHz to 2Fc	1251.2840	-42.6200	-13.00	PASS
2Fc to 10Fc	7200.7590	-37.6200	-13.00	PASS
	1588.0250	-44.6471	-13.00	PASS
	2382.0370	-44.7318	-13.00	PASS
	3176.0500	-42.2160	-13.00	PASS
	3970.0620	-43.9247	-13.00	PASS
	4764.0750	-44.3020	-13.00	PASS
	5558.0870	-44.1365	-13.00	PASS
	6352.1000	-43.8844	-13.00	PASS
	7146.1130	-39.5516	-13.00	PASS
	7940.1250	-41.1782	-13.00	PASS

Digital.: 799.0875. MHz, 12.5 kHz Channel Spacing, Max. Power

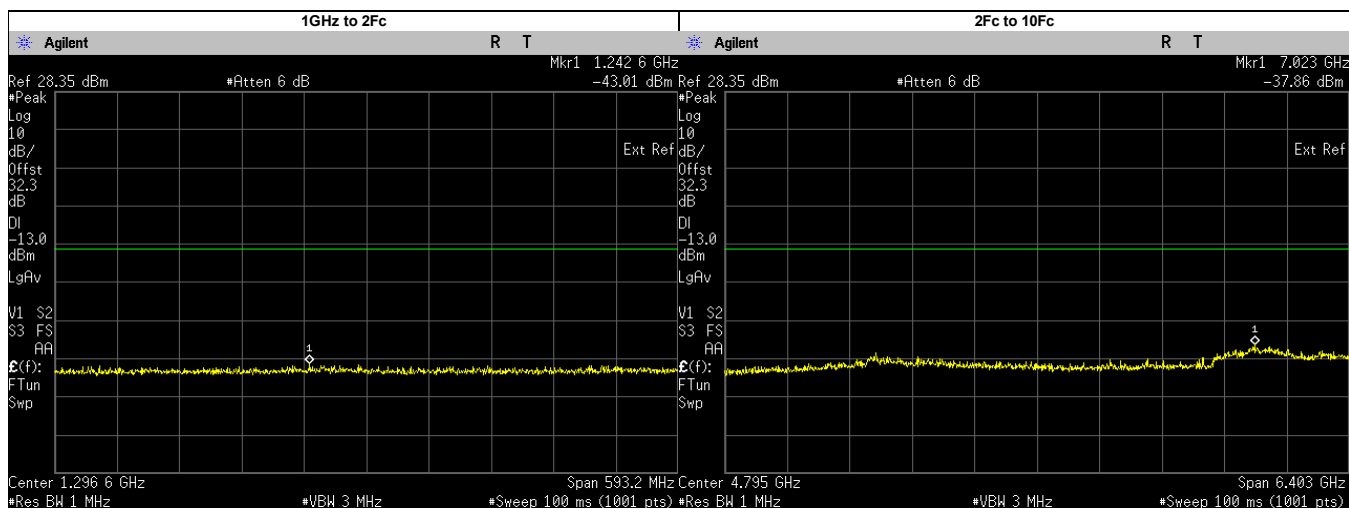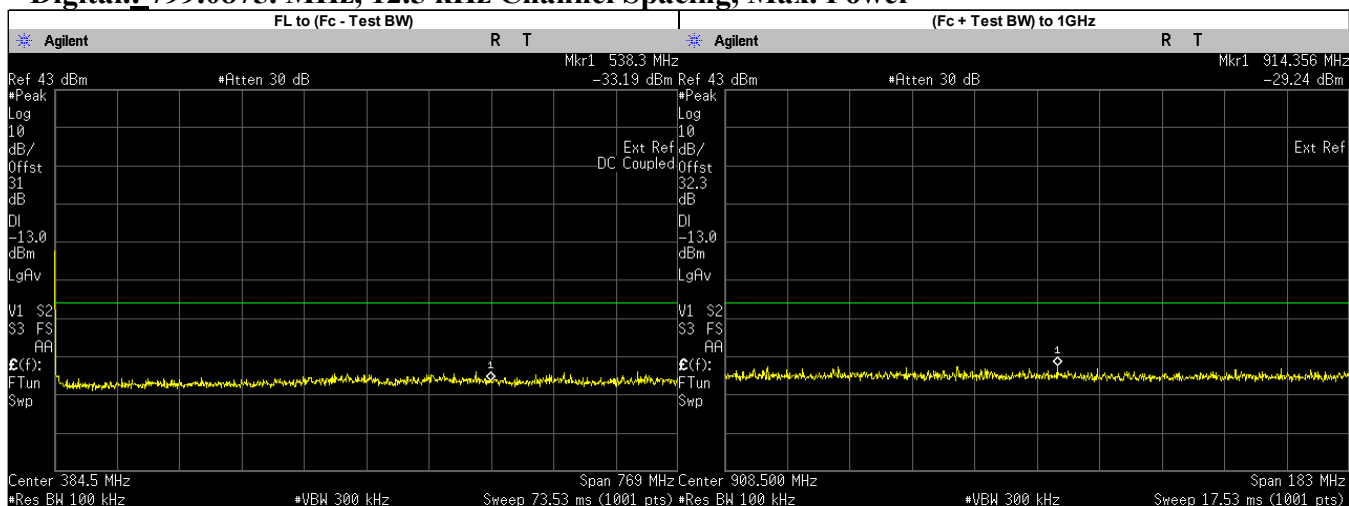



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	538.3000	-33.1940	-13.00	PASS
(Fc + Test BW) to 1GHz	914.3560	-29.2300	-13.00	PASS
1GHz to 2Fc	1242.6090	-43.0100	-13.00	PASS
2Fc to 10Fc	7022.6650	-37.8600	-13.00	PASS
	1598.1750	-45.7875	-13.00	PASS
	2397.2620	-44.5897	-13.00	PASS
	3196.3500	-41.8013	-13.00	PASS
	3995.4370	-43.5198	-13.00	PASS
	4794.5250	-42.8200	-13.00	PASS
	5593.6130	-44.1364	-13.00	PASS
	6392.7000	-43.6188	-13.00	PASS
	7191.7880	-39.1790	-13.00	PASS
	7990.8750	-41.1066	-13.00	PASS

Digital.: 799.0875. MHz, 12.5 kHz Channel Spacing, Low. Power

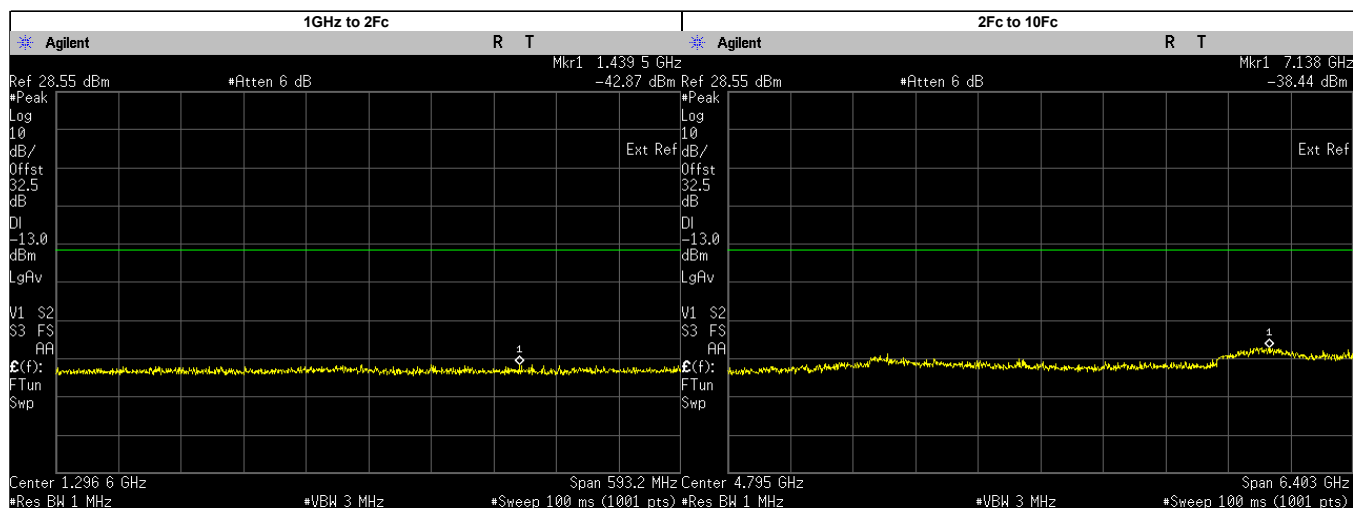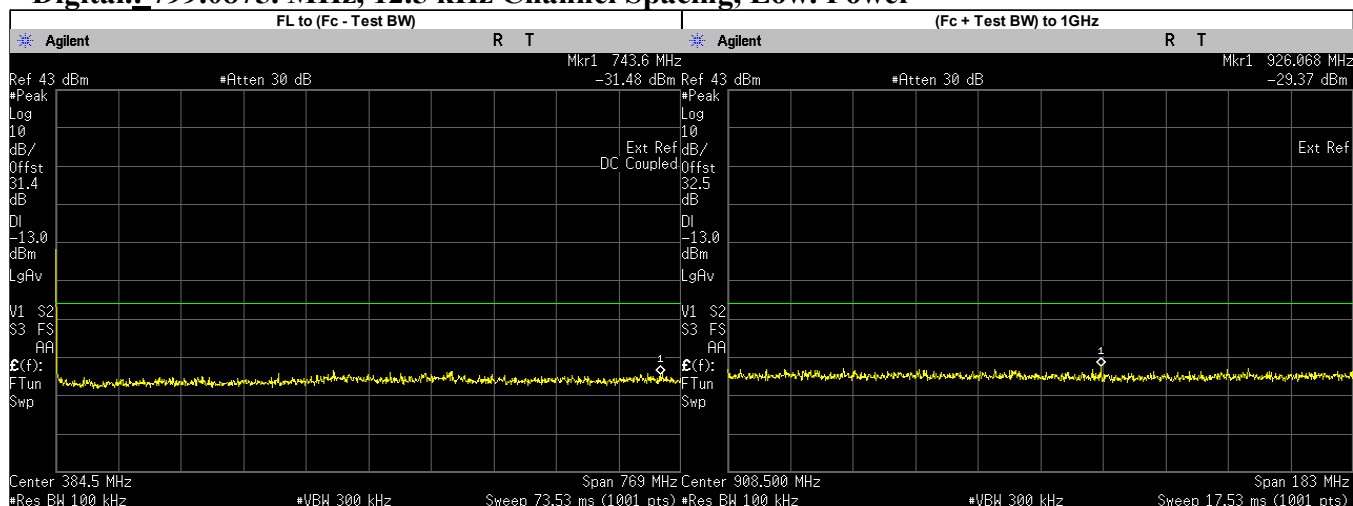



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	743.6000	-31.4840	-13.00	PASS
(Fc + Test BW) to 1GHz	926.0680	-29.3700	-13.00	PASS
1GHz to 2Fc	1439.5430	-42.8700	-13.00	PASS
2Fc to 10Fc	7137.9130	-38.4400	-13.00	PASS
	1598.1750	-44.7410	-13.00	PASS
	2397.2620	-43.4322	-13.00	PASS
	3196.3500	-41.8912	-13.00	PASS
	3995.4370	-43.6403	-13.00	PASS
	4794.5250	-43.5210	-13.00	PASS
	5593.6130	-43.5097	-13.00	PASS
	6392.7000	-43.2770	-13.00	PASS
	7191.7880	-39.3748	-13.00	PASS
	7990.8750	-41.3711	-13.00	PASS

Digital.: 804.9125. MHz, 12.5 kHz Channel Spacing, Max. Power

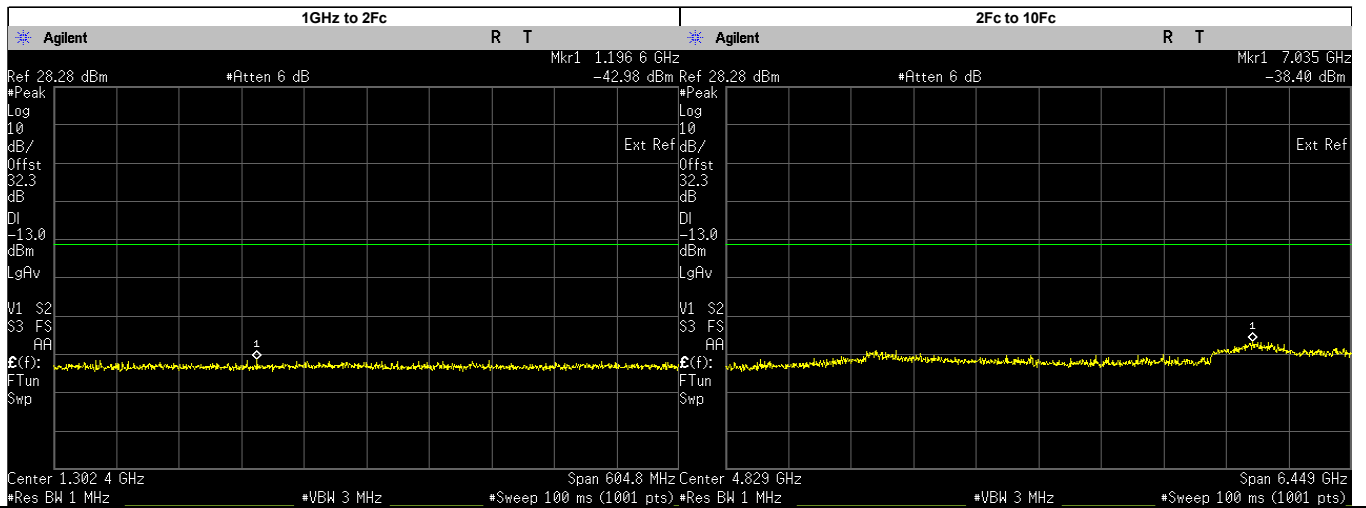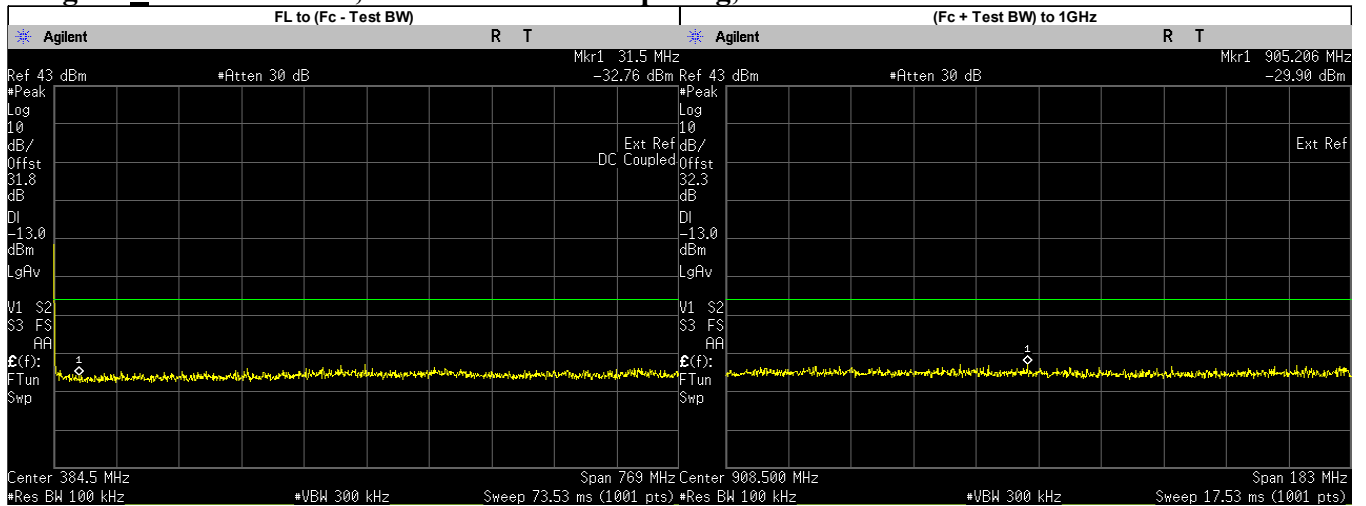

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	31.5000	-32.7630	-13.00	PASS
(Fc + Test BW) to 1GHz	905.2060	-29.9000	-13.00	PASS
1GHz to 2Fc	1196.5680	-42.9800	-13.00	PASS
2Fc to 10Fc	7035.1360	-38.4000	-13.00	PASS
	1609.8250	-44.9220	-13.00	PASS
	2414.7380	-45.0501	-13.00	PASS
	3219.6500	-41.8517	-13.00	PASS
	4024.5620	-43.5664	-13.00	PASS
	4829.4750	-43.8620	-13.00	PASS
	5634.3870	-44.2170	-13.00	PASS
	6439.3000	-44.2325	-13.00	PASS
	7244.2120	-39.7116	-13.00	PASS
	8049.1250	-41.6981	-13.00	PASS


Digital: 804.9125. MHz, 12.5 kHz Channel Spacing, Low. Power

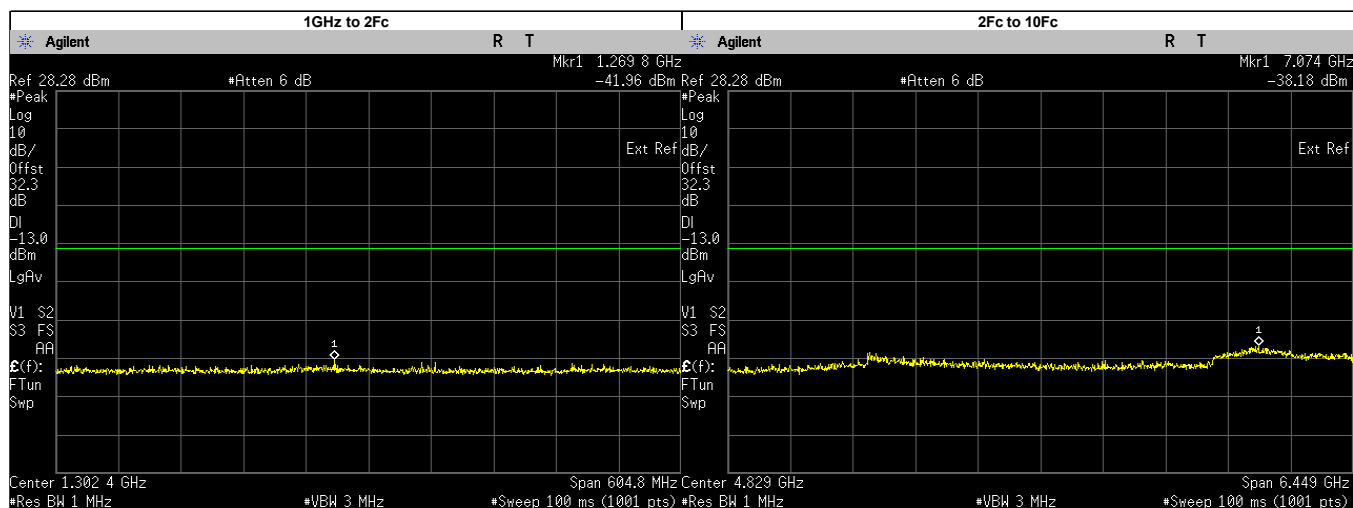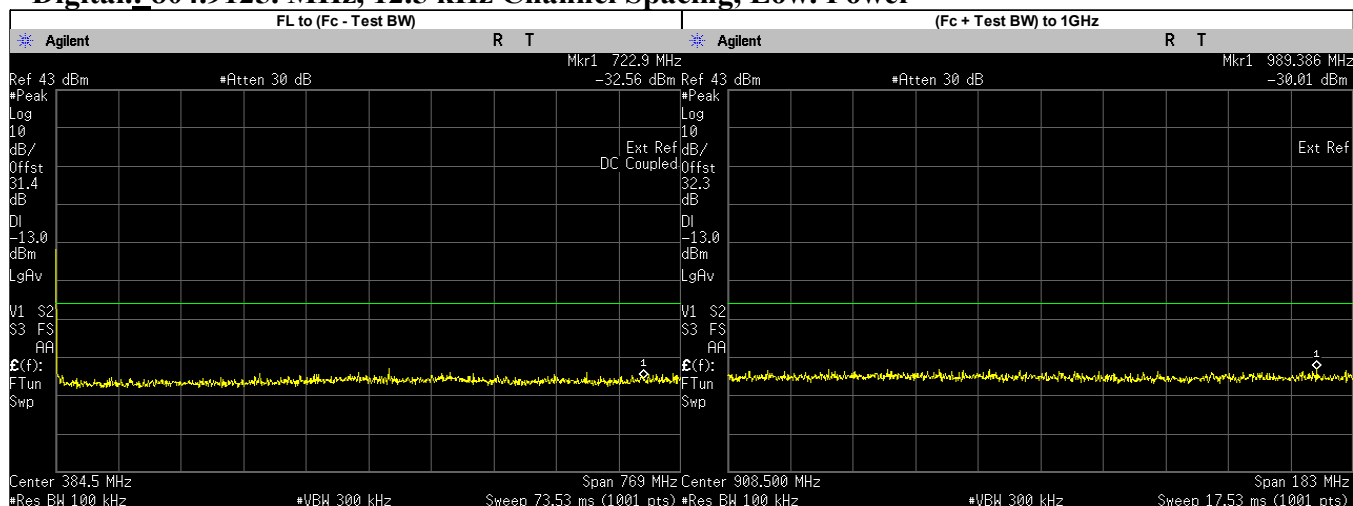

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	722.9000	-32.5580	-13.00	PASS
(Fc + Test BW) to 1GHz	989.3860	-30.0200	-13.00	PASS
1GHz to 2Fc	1269.7520	-41.9600	-13.00	PASS
2Fc to 10Fc	7073.8310	-38.1800	-13.00	PASS
	1609.8250	-44.6665	-13.00	PASS
	2414.7380	-44.7314	-13.00	PASS
	3219.6500	-42.0229	-13.00	PASS
	4024.5620	-43.0535	-13.00	PASS
	4829.4750	-44.4190	-13.00	PASS
	5634.3870	-44.1093	-13.00	PASS
	6439.3000	-43.3657	-13.00	PASS
	7244.2120	-40.1793	-13.00	PASS
	8049.1250	-41.5749	-13.00	PASS

Phase II.: 764.0125. MHz, 12.5 kHz Channel Spacing, Max. Power


Not for FCC review

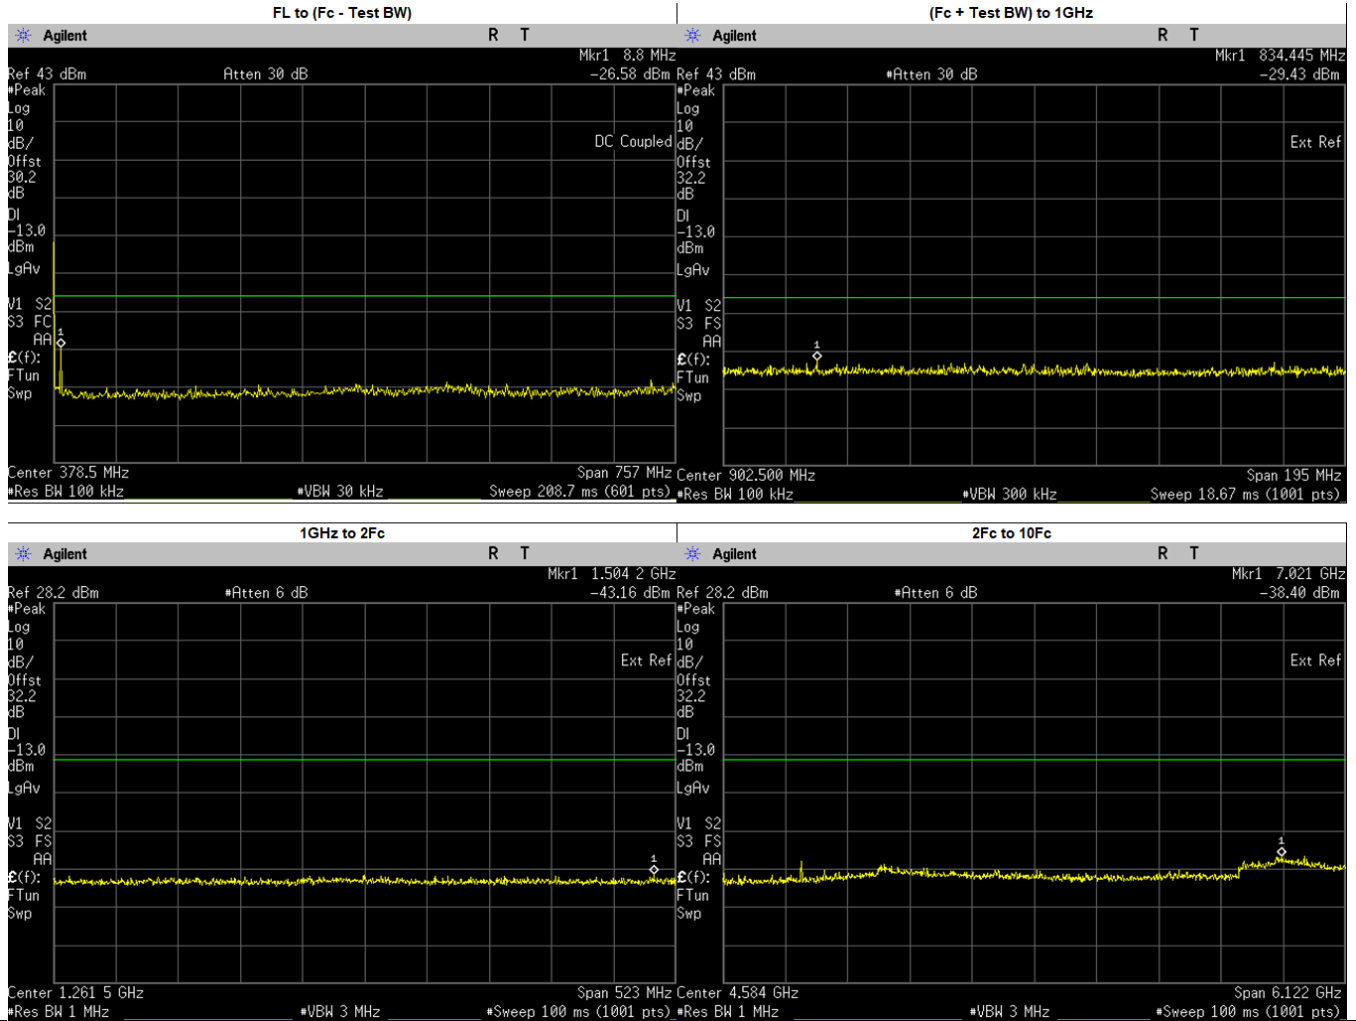

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	8.8000	-26.5800	-13.00	PASS
(Fc + Test BW) to 1GHz	834.4450	-29.4300	-13.00	PASS
1GHz to 2Fc	1504.1960	-43.1600	-13.00	PASS
2Fc to 10Fc	7020.6710	-38.4000	-13.00	PASS
	1528.0250	-43.2332	-13.00	PASS
	2292.0370	-40.9488	-13.00	PASS
	3056.0500	-41.8566	-13.00	PASS
	3820.0620	-43.0399	-13.00	PASS
	4584.0750	-43.6840	-13.00	PASS
	5348.0870	-44.6058	-13.00	PASS
	6112.1000	-43.5890	-13.00	PASS
	6876.1130	-40.7209	-13.00	PASS
	7640.1250	-40.9009	-13.00	PASS



Phase II.: 764.0125. MHz, 12.5 kHz Channel Spacing, Low. Power

Not for FCC review

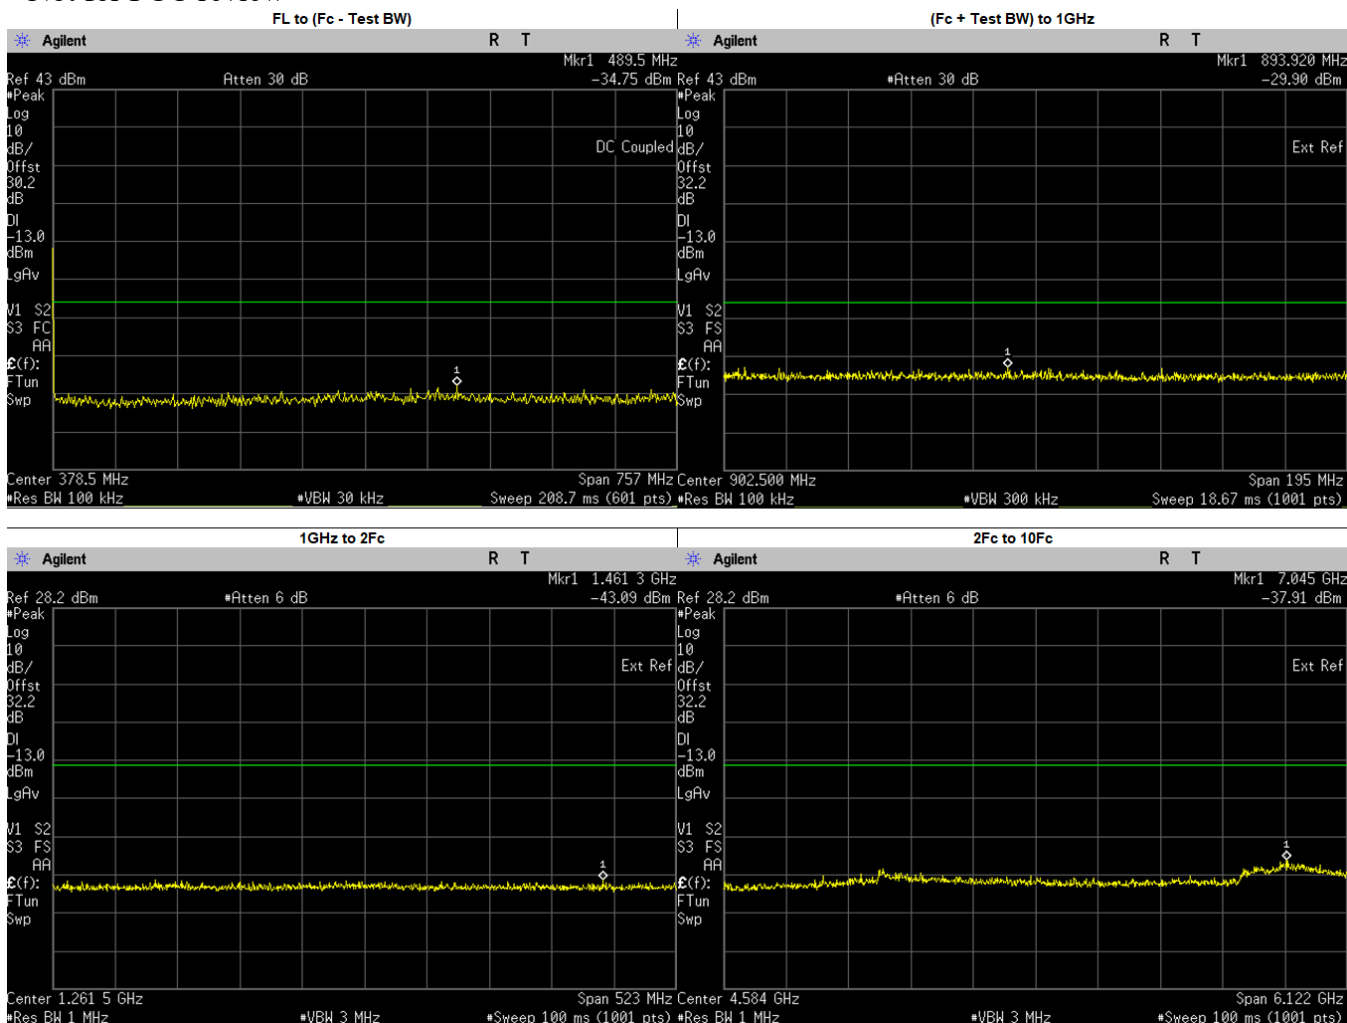



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	489.5000	-34.7500	-13.00	PASS
(Fc + Test BW) to 1GHz	893.9200	-29.8900	-13.00	PASS
1GHz to 2Fc	1461.3080	-43.0900	-13.00	PASS
2Fc to 10Fc	7045.1590	-37.9100	-13.00	PASS
	1528.0250	-45.5257	-13.00	PASS
	2292.0370	-44.6251	-13.00	PASS
	3056.0500	-41.0193	-13.00	PASS
	3820.0620	-43.5066	-13.00	PASS
	4584.0750	-44.1960	-13.00	PASS
	5348.0870	-44.5444	-13.00	PASS
	6112.1000	-43.9270	-13.00	PASS
	6876.1130	-41.3324	-13.00	PASS
	7640.1250	-41.2384	-13.00	PASS

Phase II.: 769.0125. MHz, 12.5 kHz Channel Spacing, Max. Power

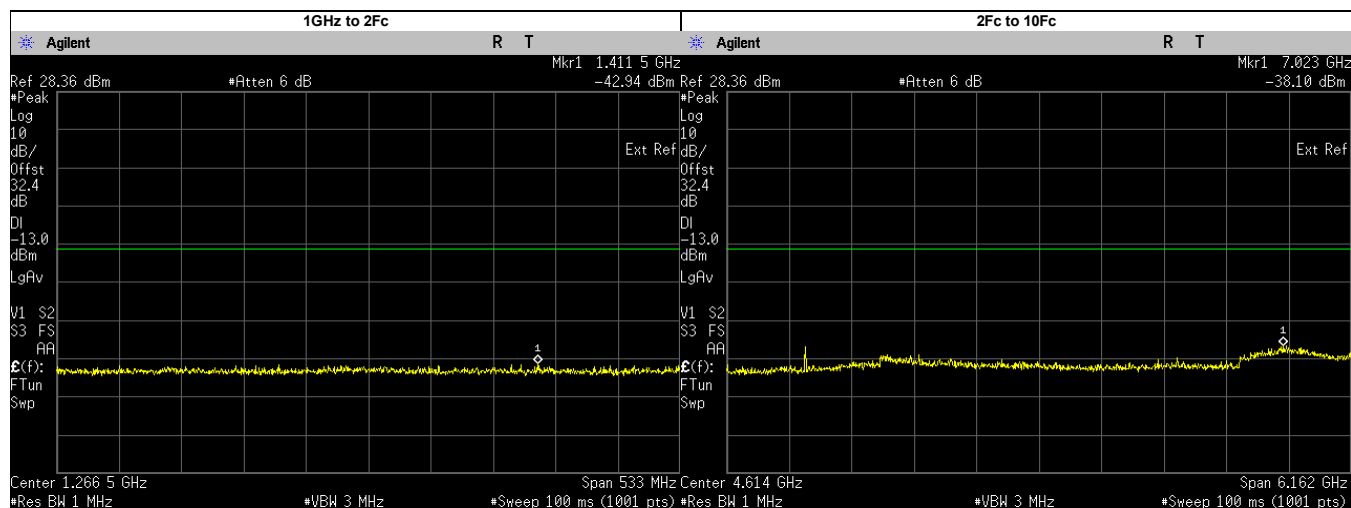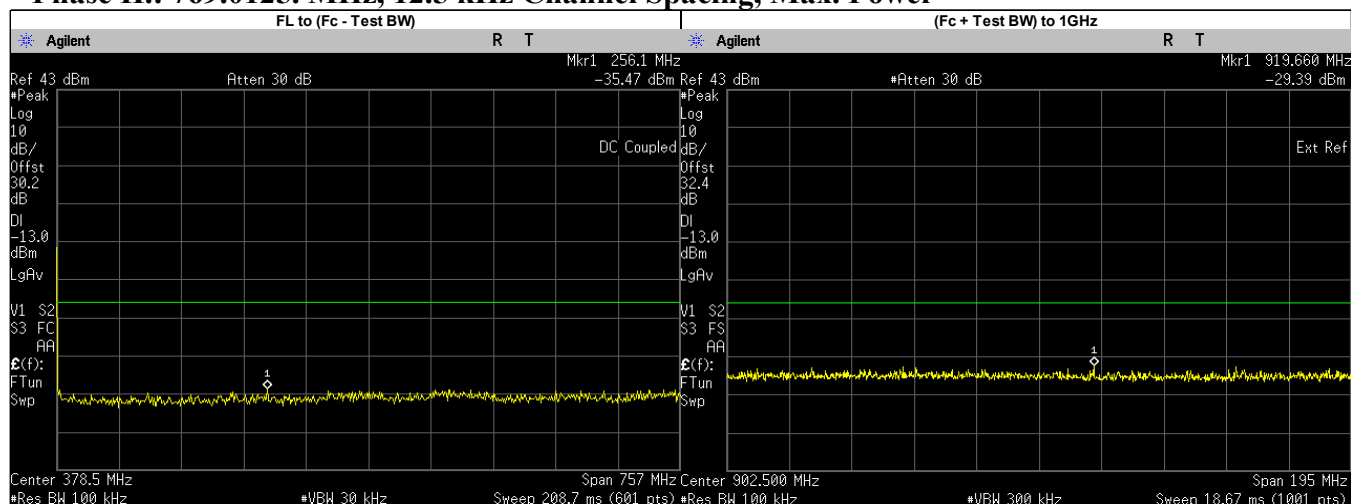



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	256.1000	-35.4700	-13.00	PASS
(Fc + Test BW) to 1GHz	919.6600	-29.3900	-13.00	PASS
1GHz to 2Fc	1411.4950	-42.9400	-13.00	PASS
2Fc to 10Fc	7023.4560	-38.0900	-13.00	PASS
	1538.0250	-43.5742	-13.00	PASS
	2307.0370	-40.0074	-13.00	PASS
	3076.0500	-41.2031	-13.00	PASS
	3845.0620	-43.2654	-13.00	PASS
	4614.0750	-43.7270	-13.00	PASS
	5383.0870	-43.4147	-13.00	PASS
	6152.1000	-43.2477	-13.00	PASS
	6921.1130	-40.5005	-13.00	PASS
	7690.1250	-40.1702	-13.00	PASS

Phase II.: 769.0875. MHz, 12.5 kHz Channel Spacing, Max. Power

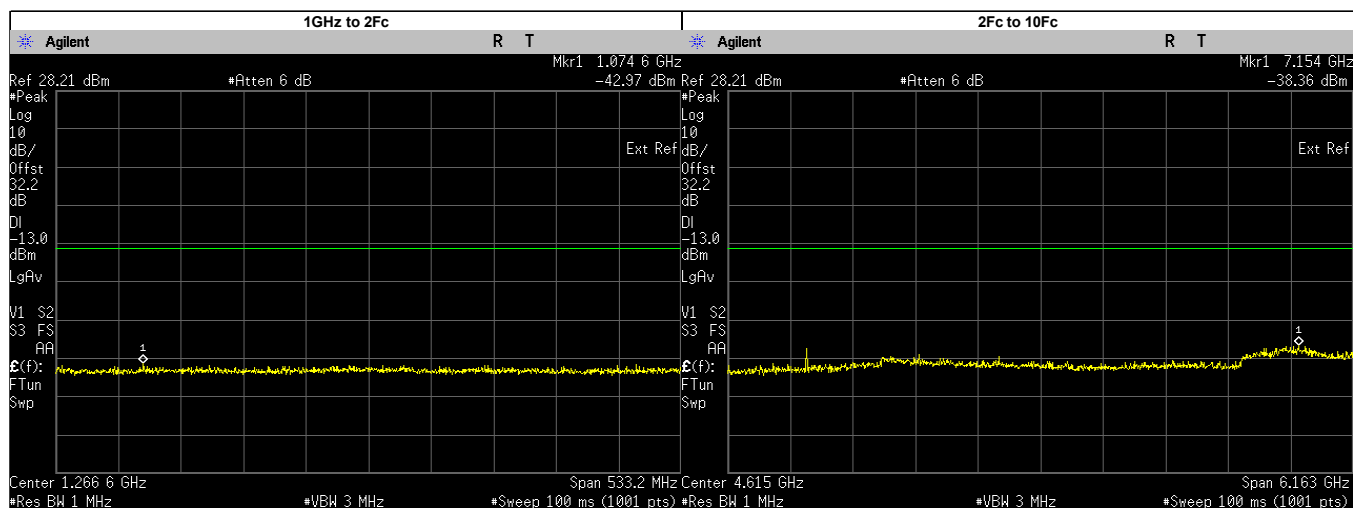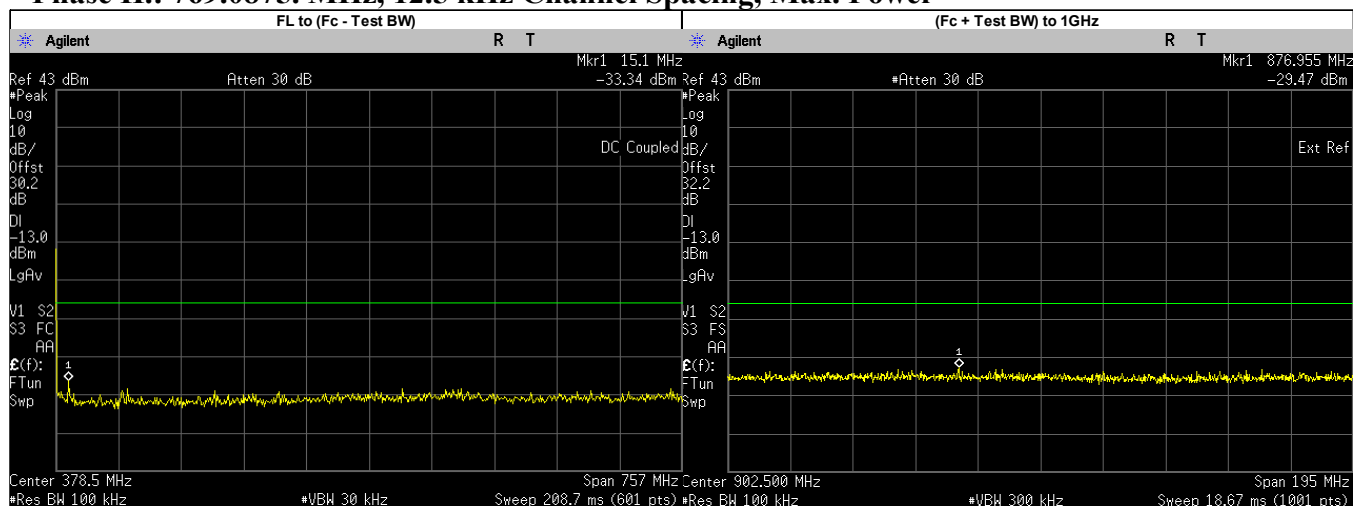



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	15.1000	-33.3400	-13.00	PASS
(Fc + Test BW) to 1GHz	876.9550	-29.4700	-13.00	PASS
1GHz to 2Fc	1074.6450	-42.9700	-13.00	PASS
2Fc to 10Fc	7153.5570	-38.3600	-13.00	PASS
	1538.1750	-44.0248	-13.00	PASS
	2307.2620	-40.9890	-13.00	PASS
	3076.3500	-42.1605	-13.00	PASS
	3845.4370	-43.4330	-13.00	PASS
	4614.5250	-43.7770	-13.00	PASS
	5383.6130	-44.1229	-13.00	PASS
	6152.7000	-43.9944	-13.00	PASS
	6921.7880	-39.9601	-13.00	PASS
	7690.8750	-40.4038	-13.00	PASS

Phase II.: 769.0875. MHz, 12.5 kHz Channel Spacing, Low. Power

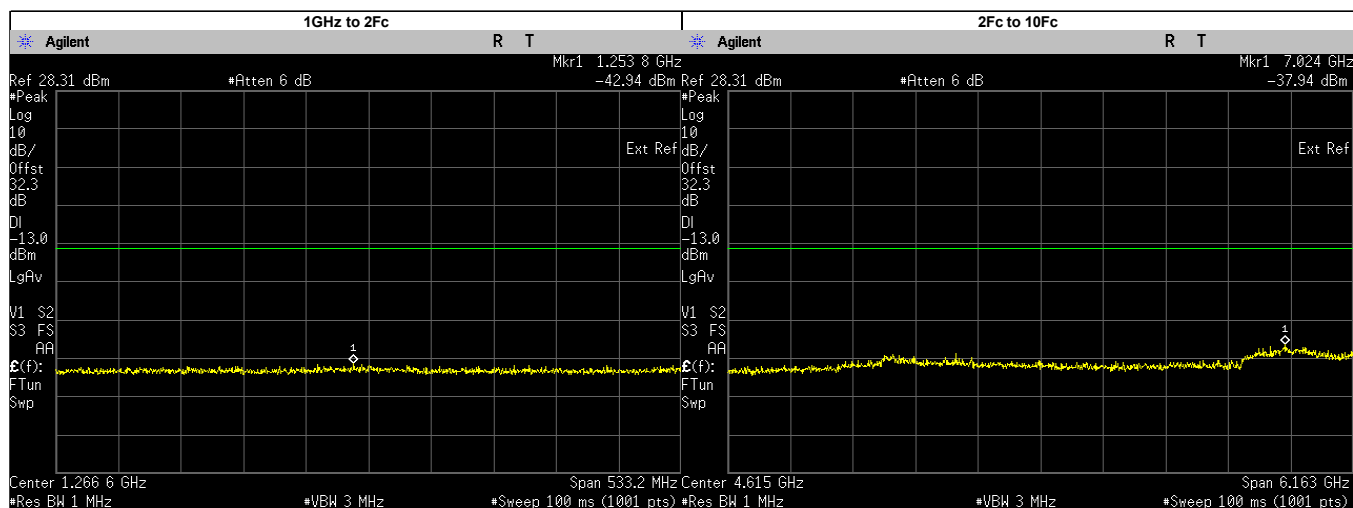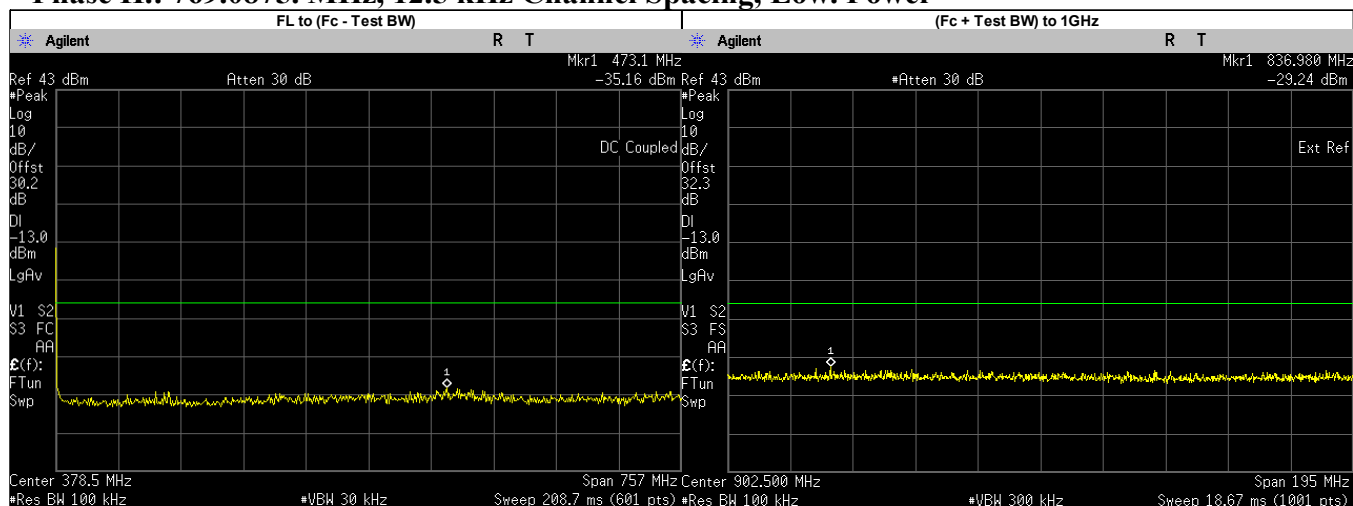



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	473.1000	-35.1600	-13.00	PASS
(Fc + Test BW) to 1GHz	836.9800	-29.2400	-13.00	PASS
1GHz to 2Fc	1253.7910	-42.9400	-13.00	PASS
2Fc to 10Fc	7024.1410	-37.9400	-13.00	PASS
	1538.1750	-44.9712	-13.00	PASS
	2307.2620	-44.3891	-13.00	PASS
	3076.3500	-41.6032	-13.00	PASS
	3845.4370	-43.0457	-13.00	PASS
	4614.5250	-42.5030	-13.00	PASS
	5383.6130	-44.0134	-13.00	PASS
	6152.7000	-43.9068	-13.00	PASS
	6921.7880	-40.0219	-13.00	PASS
	7690.8750	-40.7302	-13.00	PASS

Phase II.: 774.8875. MHz, 12.5 kHz Channel Spacing, Max. Power

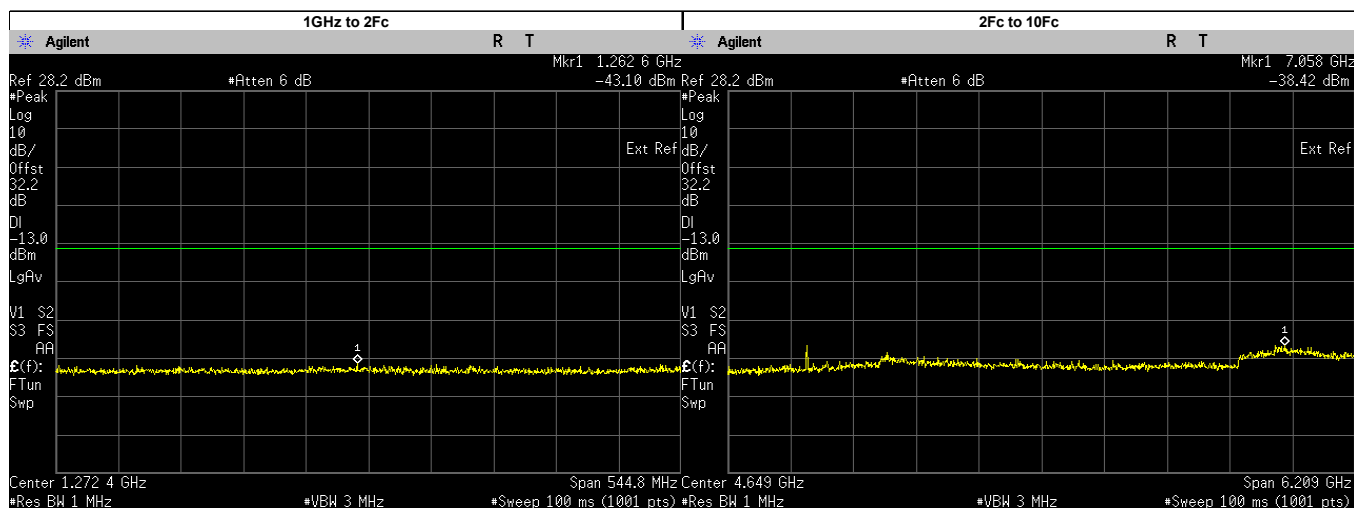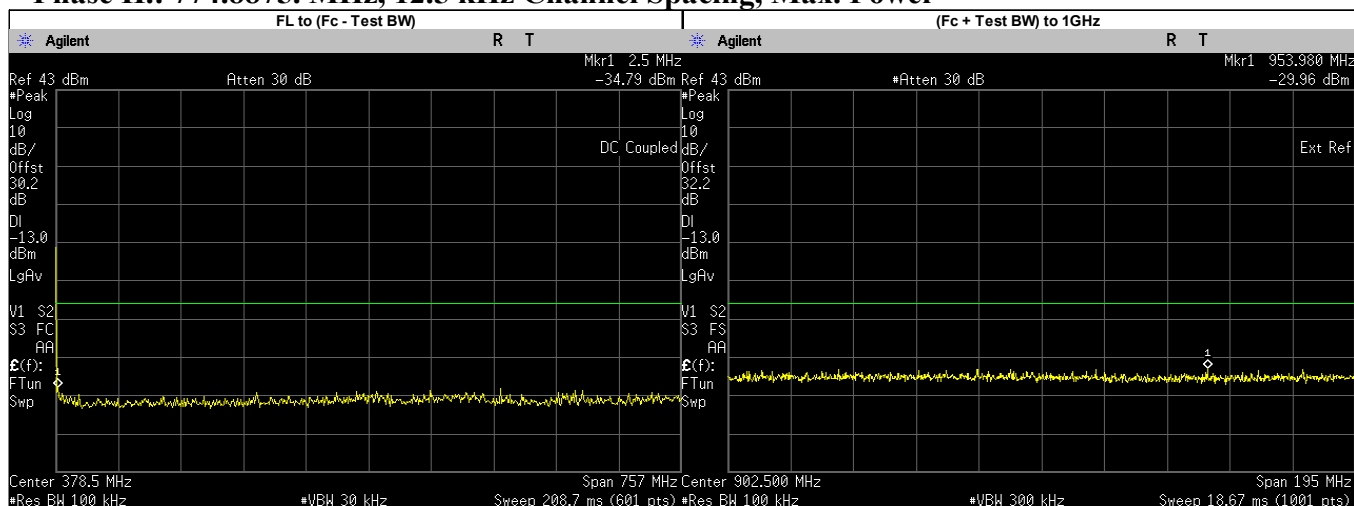

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.5000	-34.7900	-13.00	PASS
(Fc + Test BW) to 1GHz	953.9800	-29.9600	-13.00	PASS
1GHz to 2Fc	1262.5820	-43.1000	-13.00	PASS
2Fc to 10Fc	7058.4560	-38.4100	-13.00	PASS
	1549.7750	-44.2230	-13.00	PASS
	2324.6620	-39.7461	-13.00	PASS
	3099.5500	-41.9478	-13.00	PASS
	3874.4370	-43.7565	-13.00	PASS
	4649.3250	-44.3710	-13.00	PASS
	5424.2120	-43.8376	-13.00	PASS
	6199.1000	-43.4173	-13.00	PASS
	6973.9880	-39.3841	-13.00	PASS
	7748.8750	-41.3198	-13.00	PASS



Phase II.: 774.8875. MHz, 12.5 kHz Channel Spacing, Low. Power

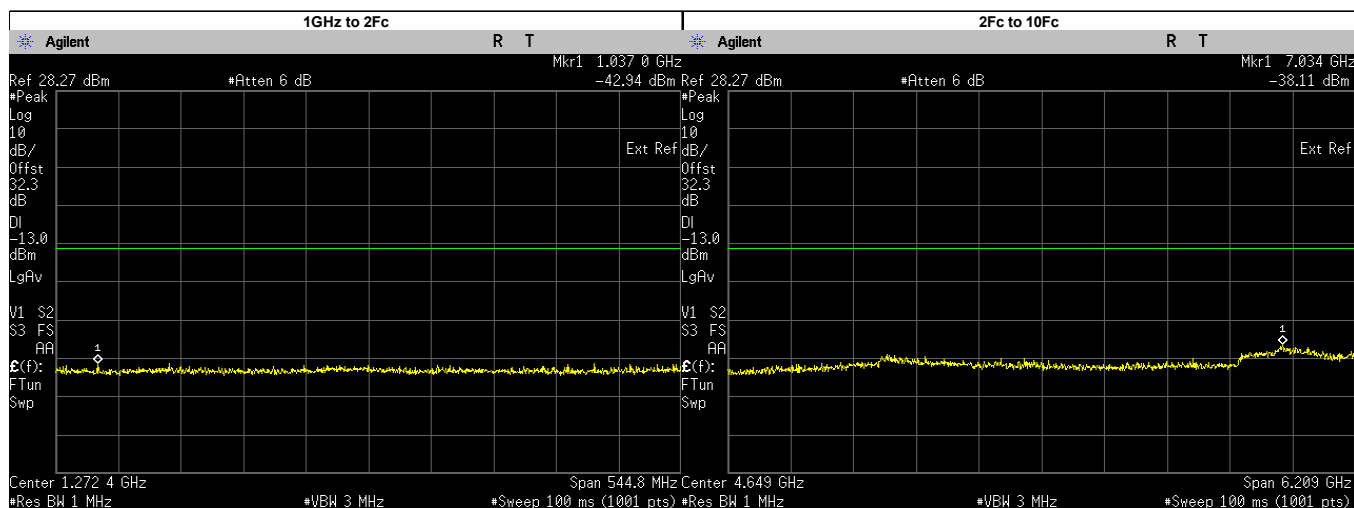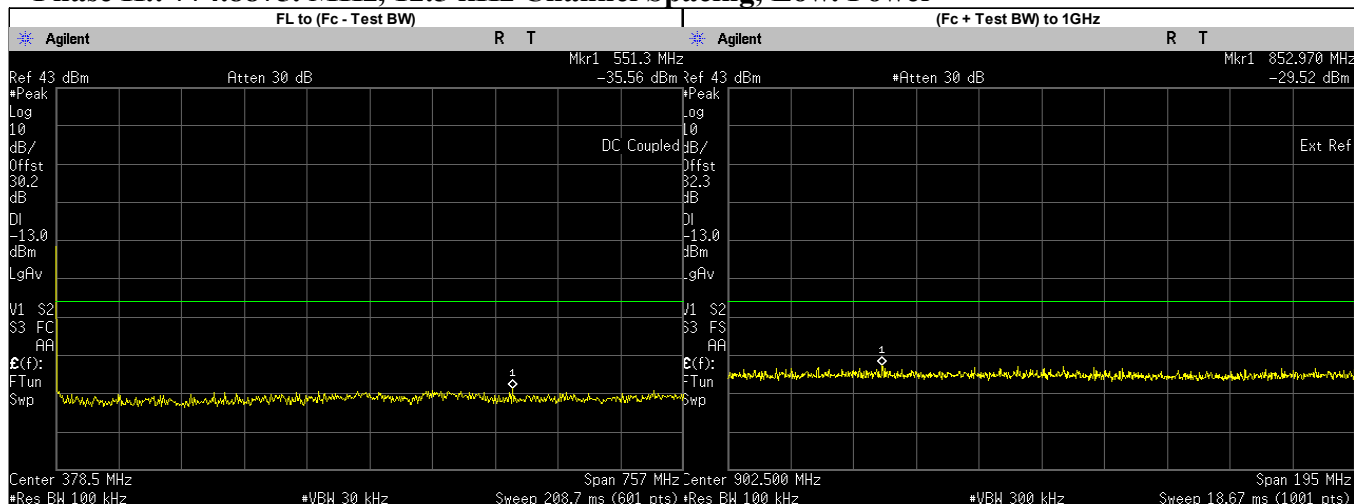

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	551.3000	-35.5600	-13.00	PASS
(Fc + Test BW) to 1GHz	852.9700	-29.5200	-13.00	PASS
1GHz to 2Fc	1037.0450	-42.9400	-13.00	PASS
2Fc to 10Fc	7033.6190	-38.1100	-13.00	PASS
	1549.7750	-45.0862	-13.00	PASS
	2324.6620	-44.7491	-13.00	PASS
	3099.5500	-42.4380	-13.00	PASS
	3874.4370	-42.4451	-13.00	PASS
	4649.3250	-42.7110	-13.00	PASS
	5424.2120	-44.6640	-13.00	PASS
	6199.1000	-43.9396	-13.00	PASS
	6973.9880	-39.7881	-13.00	PASS
	7748.8750	-40.6775	-13.00	PASS

Phase II.: 794.0125. MHz, 12.5 kHz Channel Spacing, Max. Power



Not for FCC review

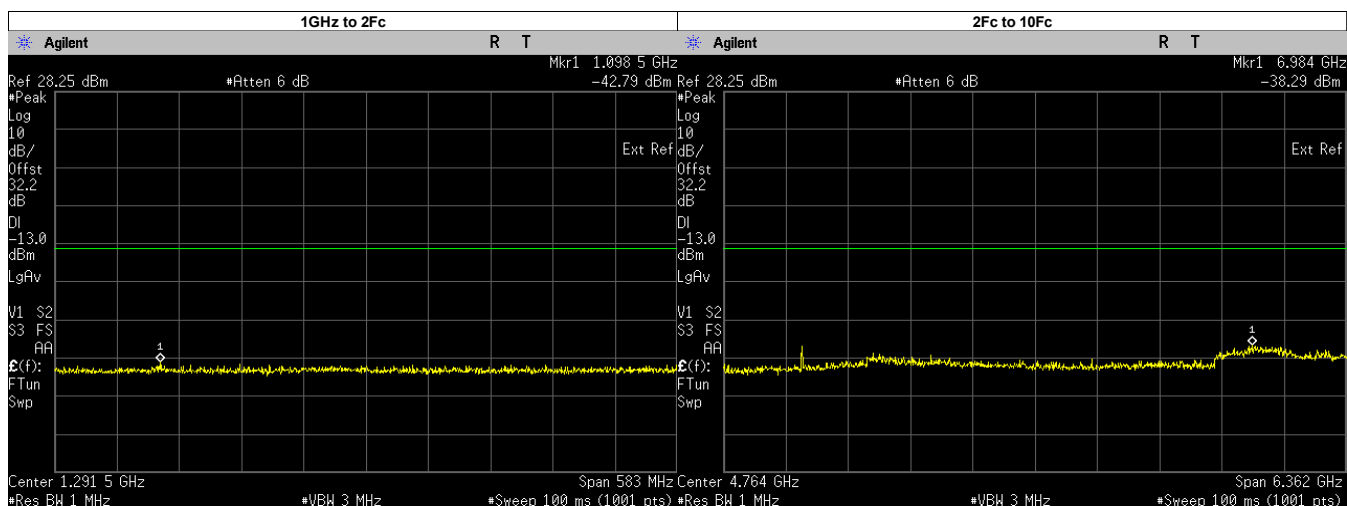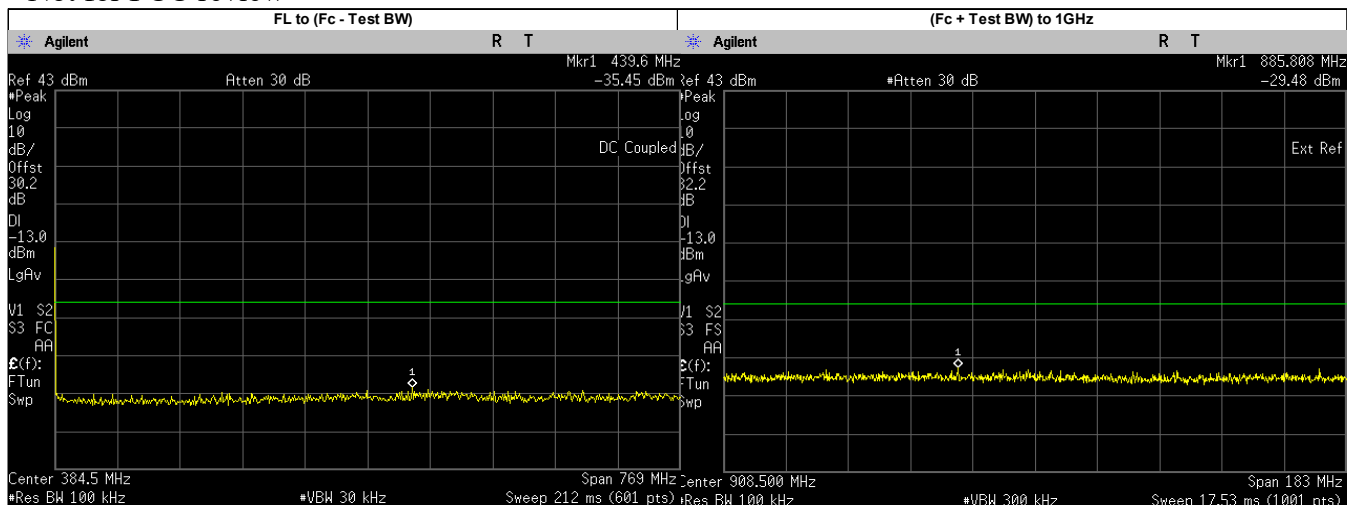

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	439.6000	-35.4500	-13.00	PASS
(Fc + Test BW) to 1GHz	885.8080	-29.4800	-13.00	PASS
1GHz to 2Fc	1098.5310	-42.7900	-13.00	PASS
2Fc to 10Fc	6984.4480	-38.2900	-13.00	PASS
	1588.0250	-43.4272	-13.00	PASS
	2382.0370	-39.9290	-13.00	PASS
	3176.0500	-41.2431	-13.00	PASS
	3970.0620	-43.3092	-13.00	PASS
	4764.0750	-44.3790	-13.00	PASS
	5558.0870	-43.0702	-13.00	PASS
	6352.1000	-44.0302	-13.00	PASS
	7146.1130	-39.4778	-13.00	PASS
	7940.1250	-41.4040	-13.00	PASS



Phase II.: 794.0125. MHz, 12.5 kHz Channel Spacing, Low. Power

Not for FCC review

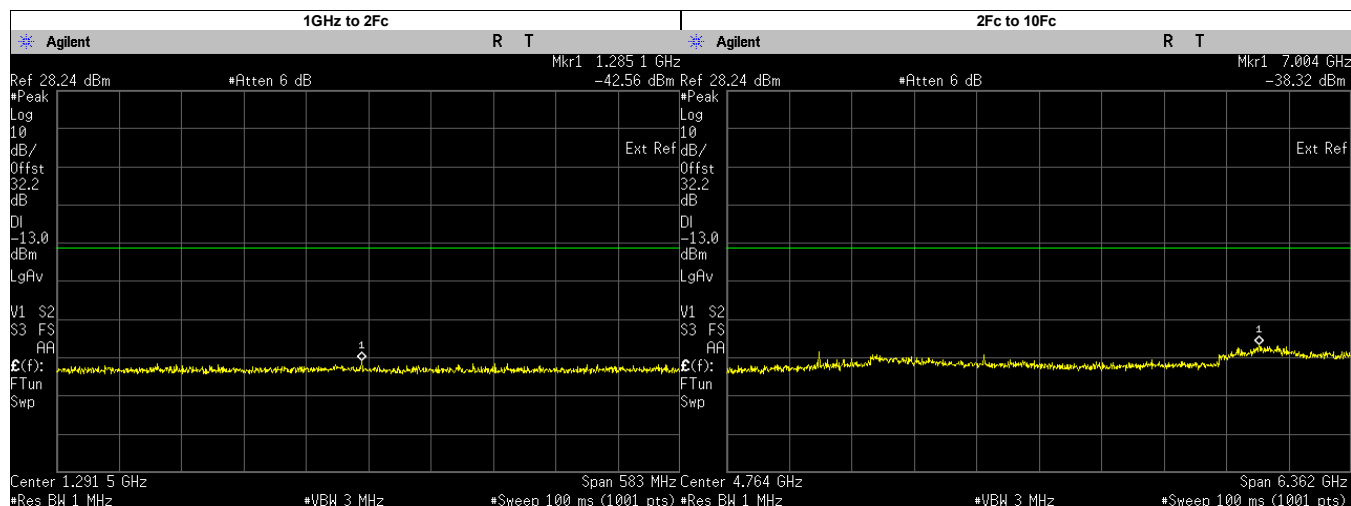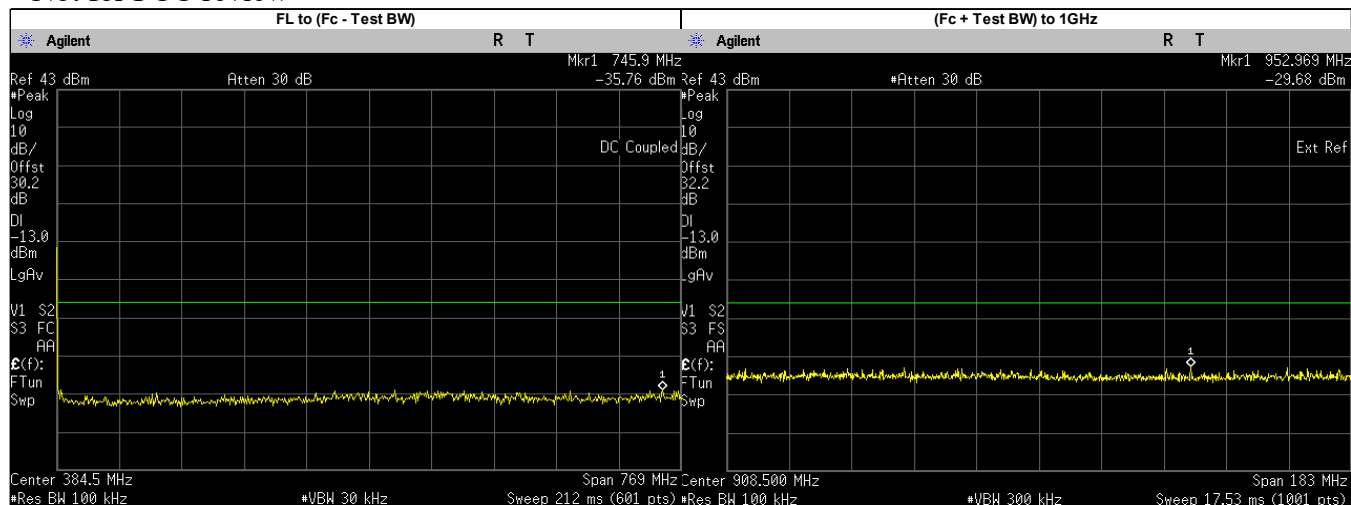



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	745.9000	-35.7600	-13.00	PASS
(Fc + Test BW) to 1GHz	952.9690	-29.6800	-13.00	PASS
1GHz to 2Fc	1285.0990	-42.5600	-13.00	PASS
2Fc to 10Fc	7003.5340	-38.3200	-13.00	PASS
	1588.0250	-45.2032	-13.00	PASS
	2382.0370	-44.3912	-13.00	PASS
	3176.0500	-42.3766	-13.00	PASS
	3970.0620	-42.5779	-13.00	PASS
	4764.0750	-44.0670	-13.00	PASS
	5558.0870	-44.4130	-13.00	PASS
	6352.1000	-43.1977	-13.00	PASS
	7146.1130	-40.1663	-13.00	PASS
	7940.1250	-41.1569	-13.00	PASS

Phase II.: 799.0875. MHz, 12.5 kHz Channel Spacing, Max. Power

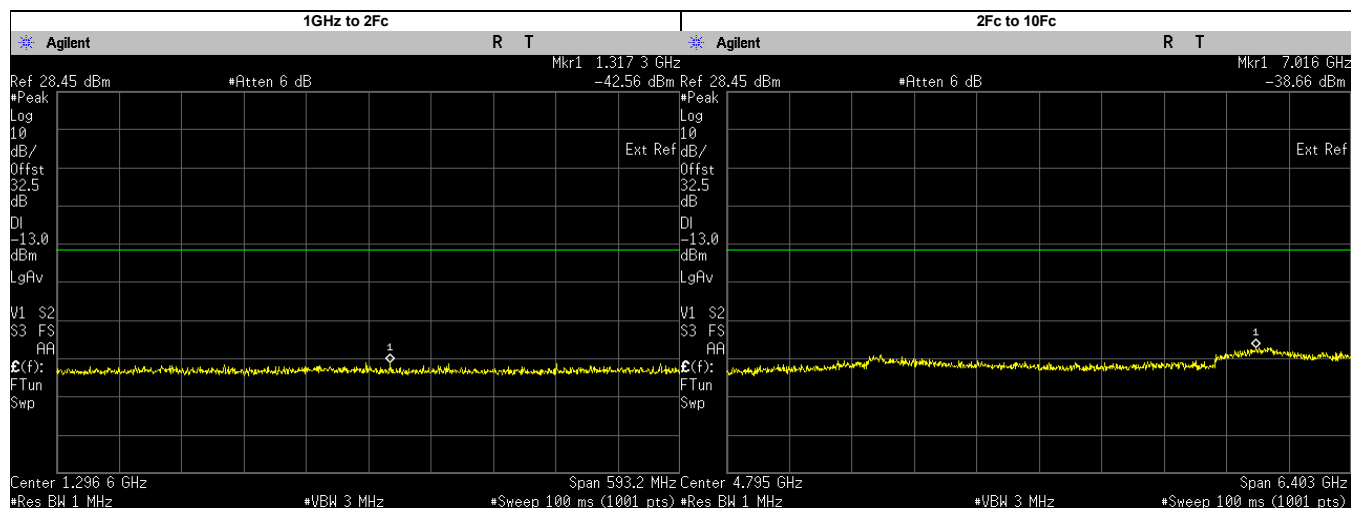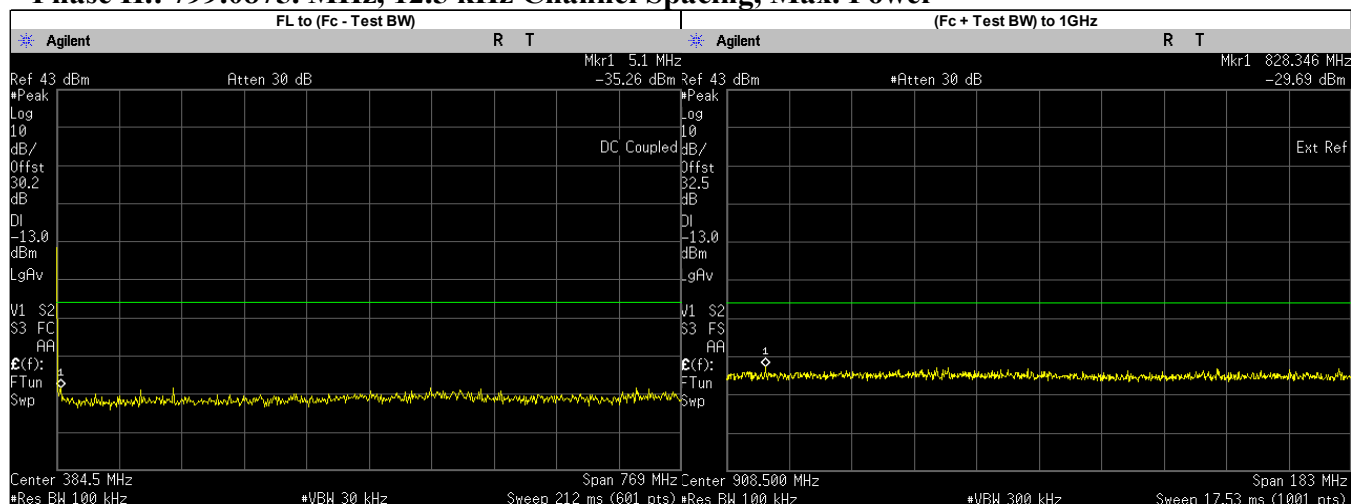



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	5.1000	-35.2600	-13.00	PASS
(Fc + Test BW) to 1GHz	828.3460	-29.6900	-13.00	PASS
1GHz to 2Fc	1317.3490	-42.5600	-13.00	PASS
2Fc to 10Fc	7016.2620	-38.6600	-13.00	PASS
	1598.1750	-44.7299	-13.00	PASS
	2397.2620	-44.8160	-13.00	PASS
	3196.3500	-42.0928	-13.00	PASS
	3995.4370	-42.4868	-13.00	PASS
	4794.5250	-44.3640	-13.00	PASS
	5593.6130	-43.2363	-13.00	PASS
	6392.7000	-42.9695	-13.00	PASS
	7191.7880	-39.7006	-13.00	PASS
	7990.8750	-41.1532	-13.00	PASS

Phase II.: 799.0875. MHz, 12.5 kHz Channel Spacing, Low. Power

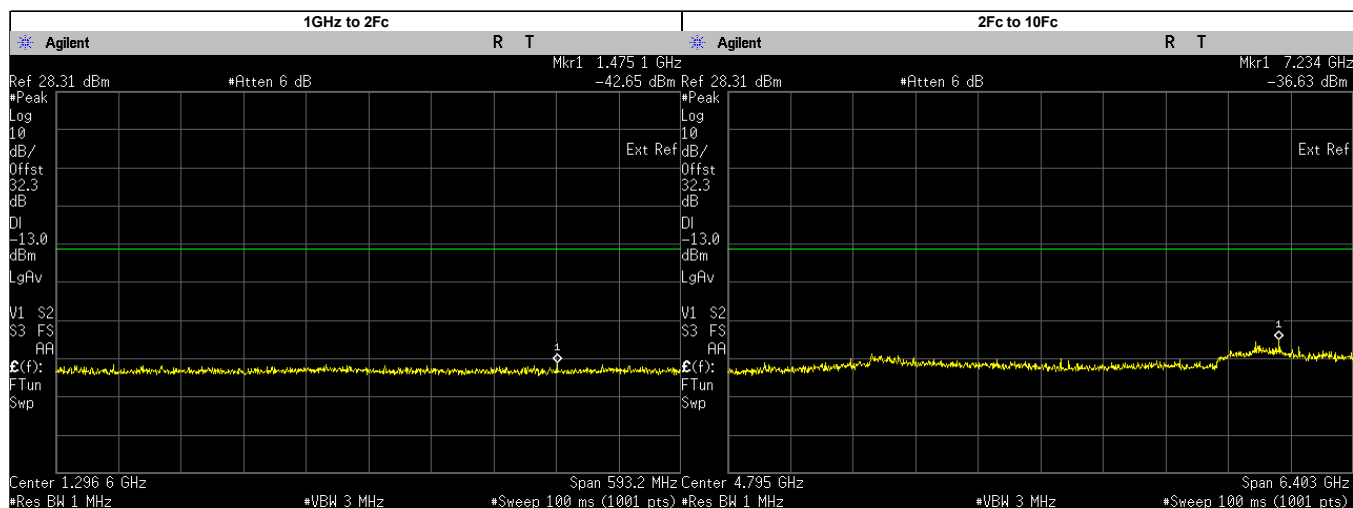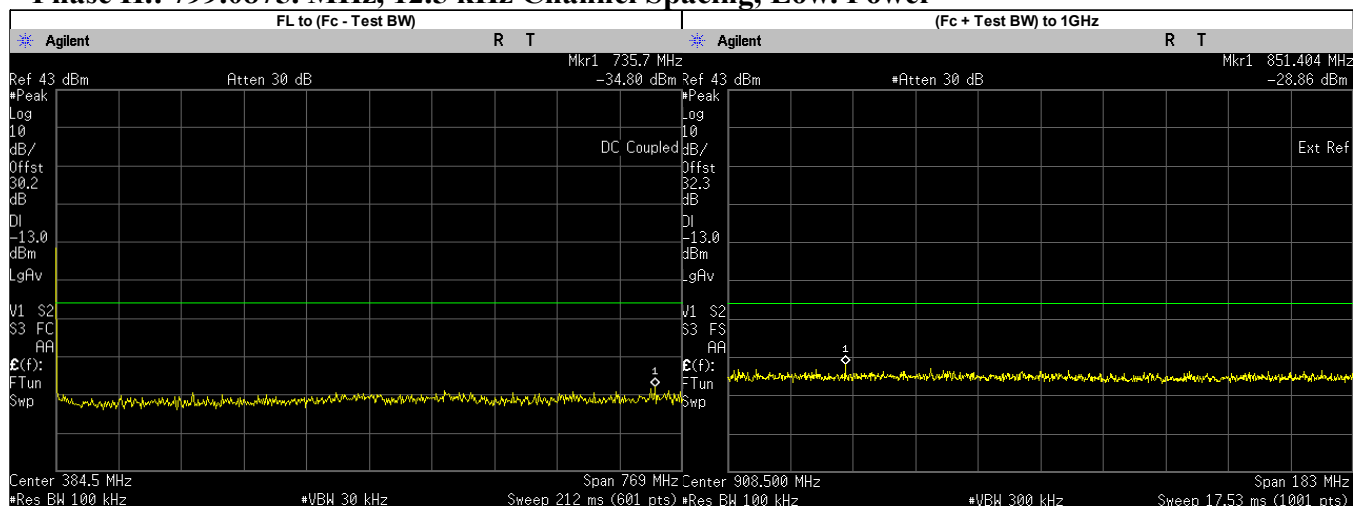



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	34.8000	-34.8000	-13.00	PASS
(Fc + Test BW) to 1GHz	851.4040	-28.8600	-13.00	PASS
1GHz to 2Fc	1475.1330	-42.6500	-13.00	PASS
2Fc to 10Fc	7233.9540	-36.6300	-13.00	PASS
	1598.1750	-45.2332	-13.00	PASS
	2397.2620	-44.7728	-13.00	PASS
	3196.3500	-42.2098	-13.00	PASS
	3995.4370	-43.4758	-13.00	PASS
	4794.5250	-44.0830	-13.00	PASS
	5593.6130	-43.3260	-13.00	PASS
	6392.7000	-43.5699	-13.00	PASS
	7191.7880	-39.5233	-13.00	PASS
	7990.8750	-41.7183	-13.00	PASS

Phase II.: 804.9125. MHz, 12.5 kHz Channel Spacing, Max. Power

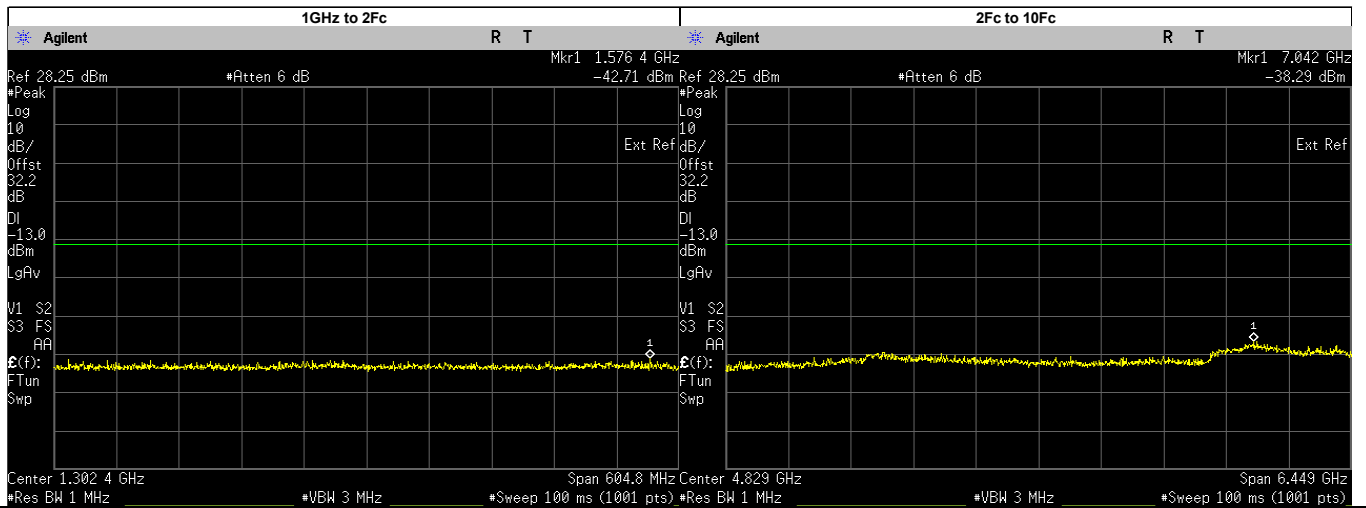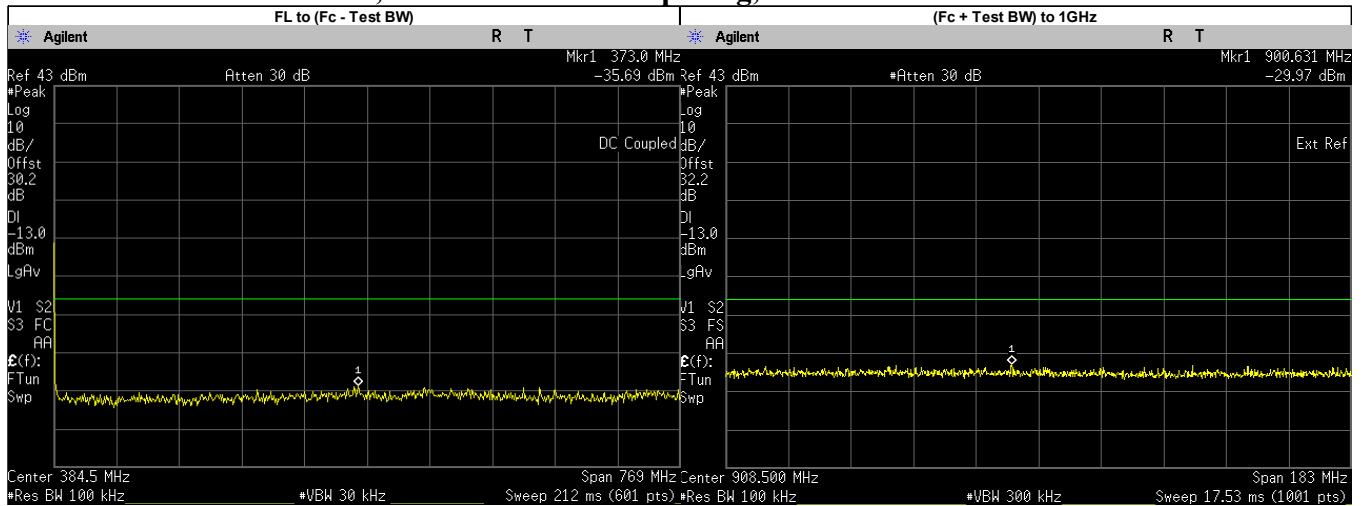

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	373.0000	-35.6900	-13.00	PASS
(Fc + Test BW) to 1GHz	900.6310	-29.9700	-13.00	PASS
1GHz to 2Fc	1576.3980	-42.7100	-13.00	PASS
2Fc to 10Fc	7041.5850	-38.2900	-13.00	PASS
	1609.8250	-46.0198	-13.00	PASS
	2414.7380	-44.6169	-13.00	PASS
	3219.6500	-41.9397	-13.00	PASS
	4024.5620	-43.3760	-13.00	PASS
	4829.4750	-44.0270	-13.00	PASS
	5634.3870	-44.5214	-13.00	PASS
	6439.3000	-44.3625	-13.00	PASS
	7244.2120	-40.1776	-13.00	PASS
	8049.1250	-41.2652	-13.00	PASS

Phase II.: 804.9125. MHz, 12.5 kHz Channel Spacing, Low. Power

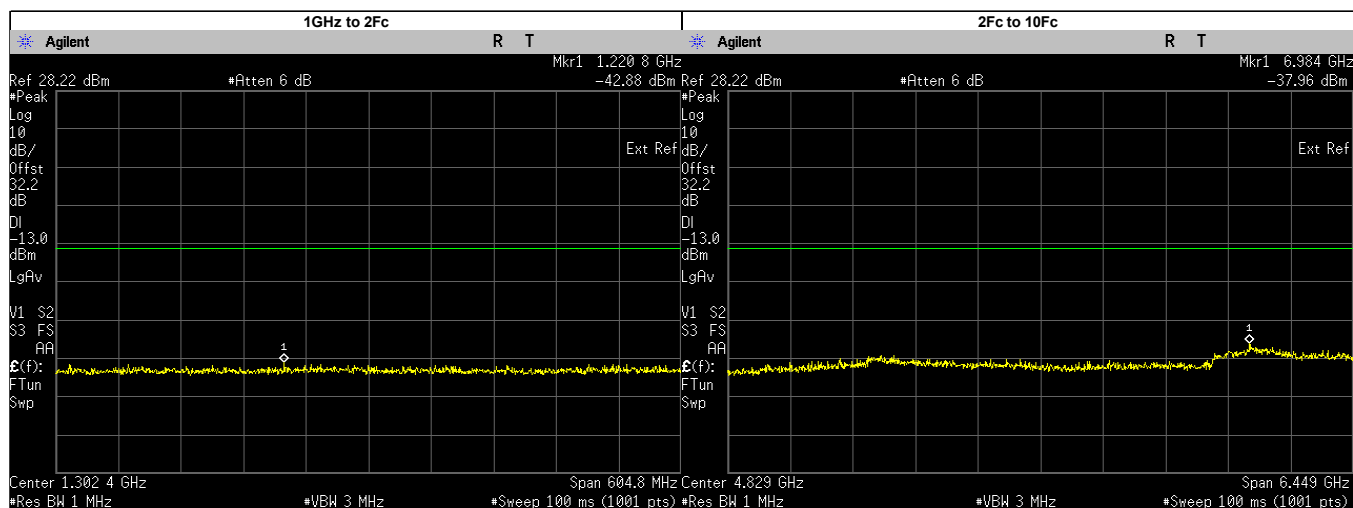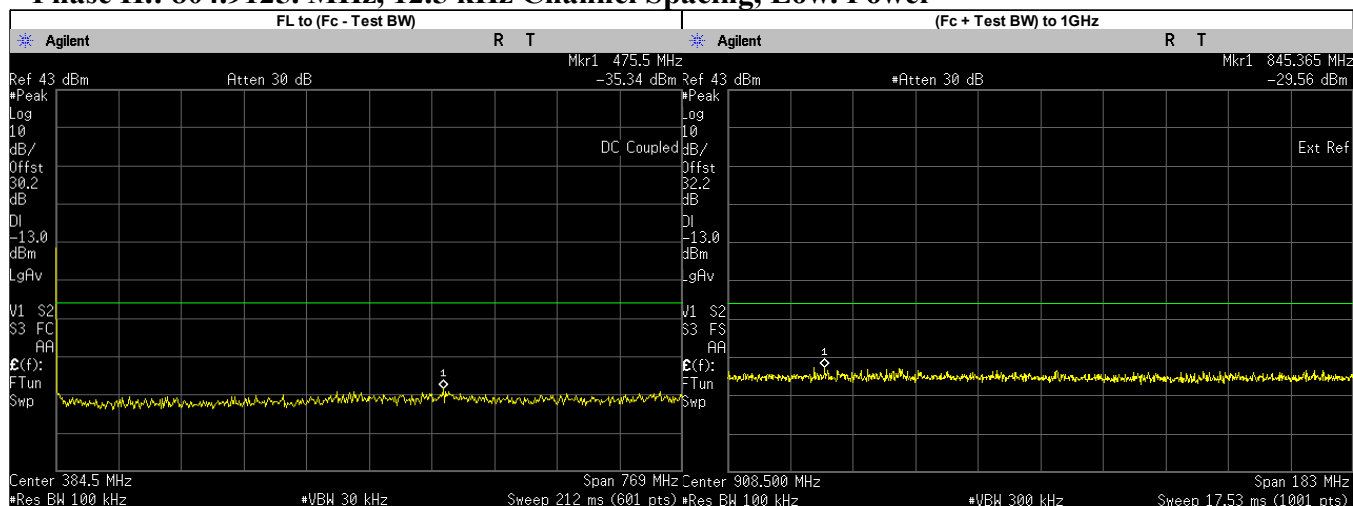

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	475.5000	-35.3400	-13.00	PASS
(Fc + Test BW) to 1GHz	845.3650	-29.5600	-13.00	PASS
1GHz to 2Fc	1220.7610	-42.8800	-13.00	PASS
2Fc to 10Fc	6983.5410	-37.9500	-13.00	PASS
	1609.8250	-45.8965	-13.00	PASS
	2414.7380	-44.4180	-13.00	PASS
	3219.6500	-42.2822	-13.00	PASS
	4024.5620	-43.2243	-13.00	PASS
	4829.4750	-44.5680	-13.00	PASS
	5634.3870	-44.1531	-13.00	PASS
	6439.3000	-44.2753	-13.00	PASS
	7244.2120	-40.3217	-13.00	PASS
	8049.1250	-41.7201	-13.00	PASS

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

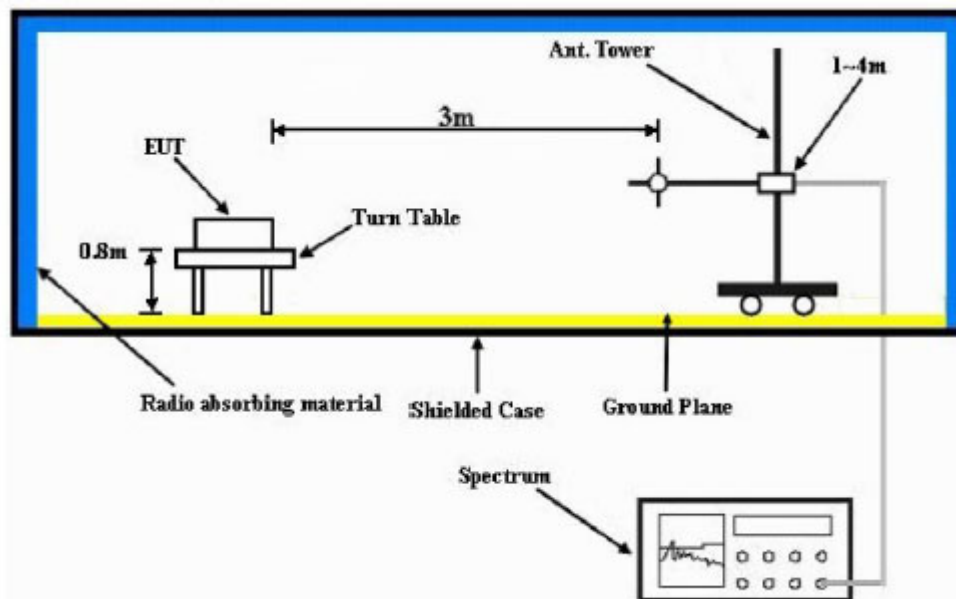


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.11.2. Test Result (Analog)

Model Number: M37TSS9PW1AN **SAC Transmitter Radiated Emission:** S/N: 681TXT7177 **SR:**03466-EMC-00198
Battery Part No: NA **Accy Part No:** AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog
764.012500 MHz (Not for FCC review) **12.5 kHz** **36.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-61.3402 **	-61.4325 **
2292.0375	-13.0000	-53.7013 **	-57.3276 **
3056.0500	-13.0000	-53.5278 **	-53.9180 **
3820.0625	-13.0000	-50.8396 **	-51.4576 **
4584.0750	-13.0000	-49.9029 **	-49.9416 **
5348.0875	-13.0000	-48.8549 **	-48.3098 **
6112.1000	-13.0000	-46.0062 **	-46.3854 **
6876.1125	-13.0000	-45.1441 **	-45.8860 **
7640.1250	-13.0000	-42.4701 **	-44.1298 **

RADIATED SPURIOUS EMISSIONS

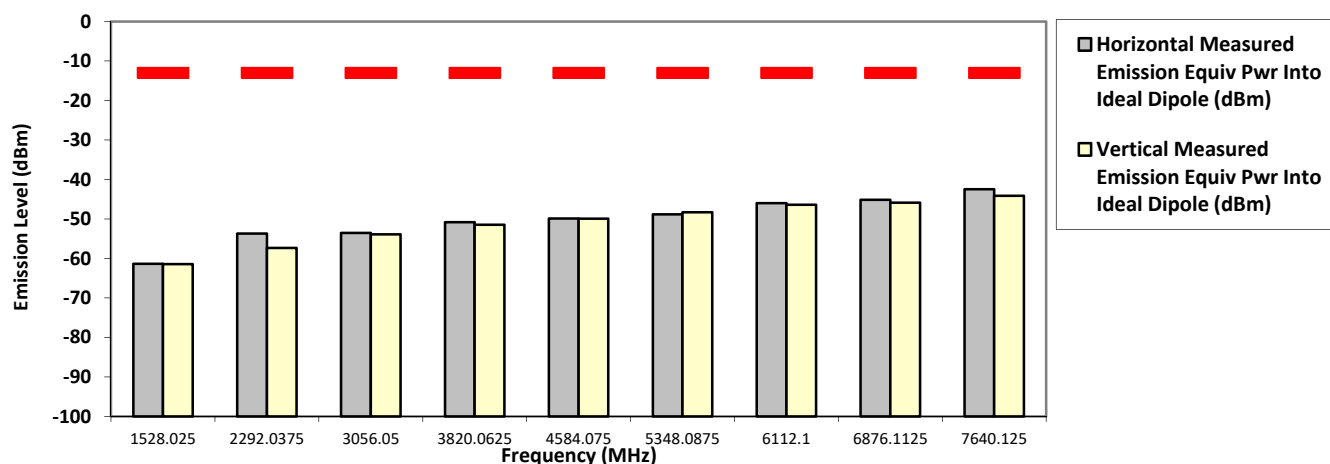

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


764.012500 MHz (Not for FCC review)

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-60.5075 **	-61.8430 **
2292.0375	-13.0000	-57.0462 **	-56.8281 **
3056.0500	-13.0000	-52.2099 **	-53.3871 **
3820.0625	-13.0000	-51.4036 **	-51.6680 **
4584.0750	-13.0000	-50.9617 **	-49.8079 **
5348.0875	-13.0000	-49.0287 **	-49.3497 **
6112.1000	-13.0000	-46.5984 **	-46.4890 **
6876.1125	-13.0000	-45.5519 **	-44.3621 **
7640.1250	-13.0000	-43.8499 **	-43.1273 **

RADIATED SPURIOUS EMISSIONS

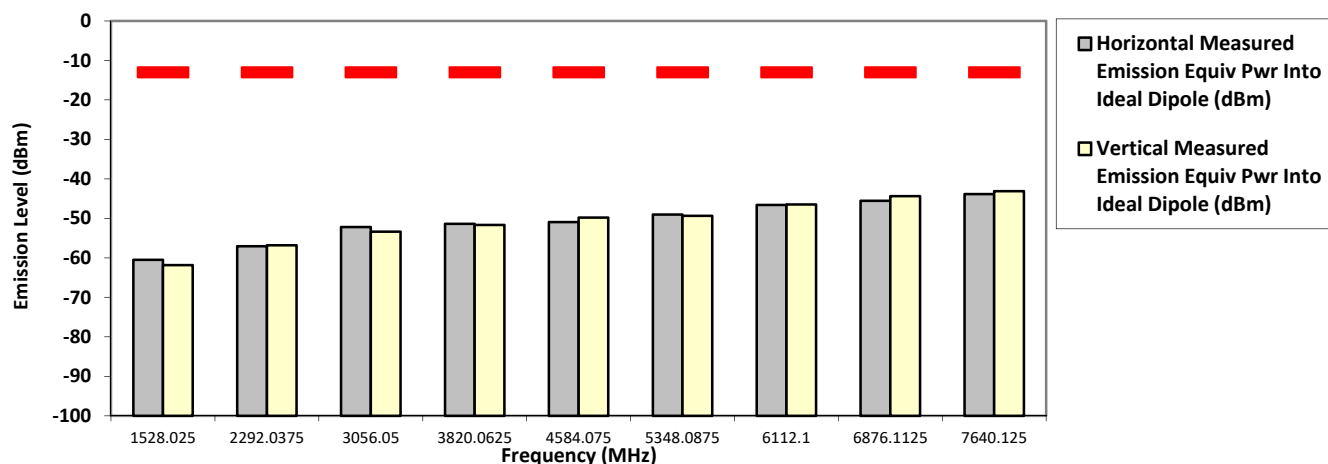

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


769.012500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.0250	-13.0000	-60.4824 **	-62.1943 **
2307.0375	-13.0000	-58.4709 **	-57.3933 **
3076.0500	-13.0000	-52.6399 **	-53.2818 **
3845.0625	-13.0000	-51.7927 **	-51.6375 **
4614.0750	-13.0000	-49.7106 **	-49.5123 **
5383.0875	-13.0000	-49.1323 **	-48.6647 **
6152.1000	-13.0000	-47.0973 **	-46.0741 **
6921.1125	-13.0000	-45.3618 **	-45.4871 **
7690.1250	-13.0000	-43.6173 **	-45.3418 **

RADIATED SPURIOUS EMISSIONS

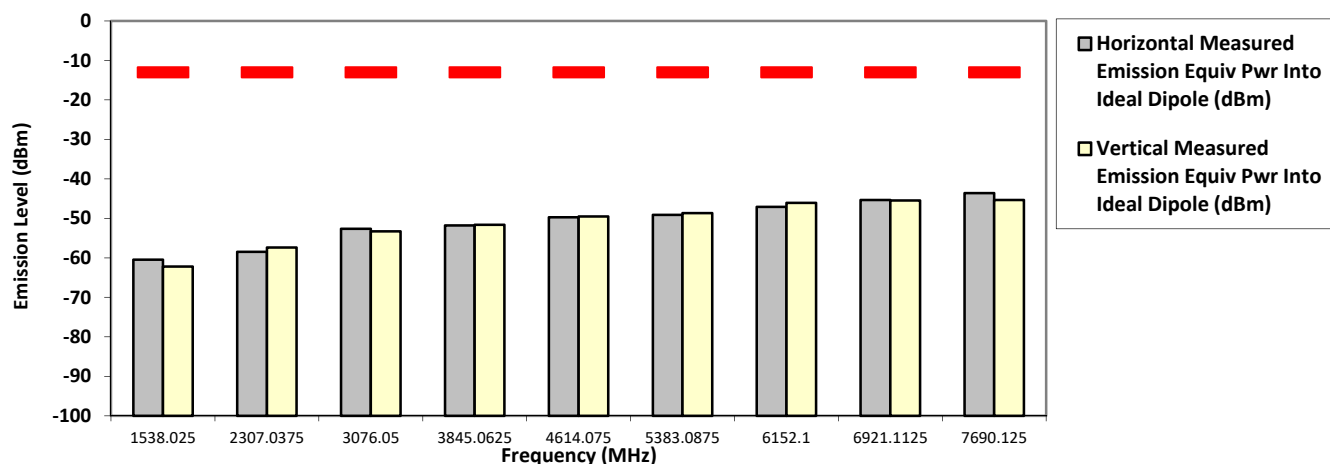

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


769.087500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.9513 **	-60.8360 **
2307.2625	-13.0000	-55.8331 **	-55.4562 **
3076.3500	-13.0000	-52.3546 **	-53.3696 **
3845.4375	-13.0000	-50.5009 **	-50.6258 **
4614.5250	-13.0000	-49.1366 **	-49.7899 **
5383.6125	-13.0000	-49.8460 **	-49.0250 **
6152.7000	-13.0000	-45.6476 **	-46.2619 **
6921.7875	-13.0000	-44.8833 **	-46.2120 **
7690.8750	-13.0000	-43.9170 **	-44.2037 **

RADIATED SPURIOUS EMISSIONS

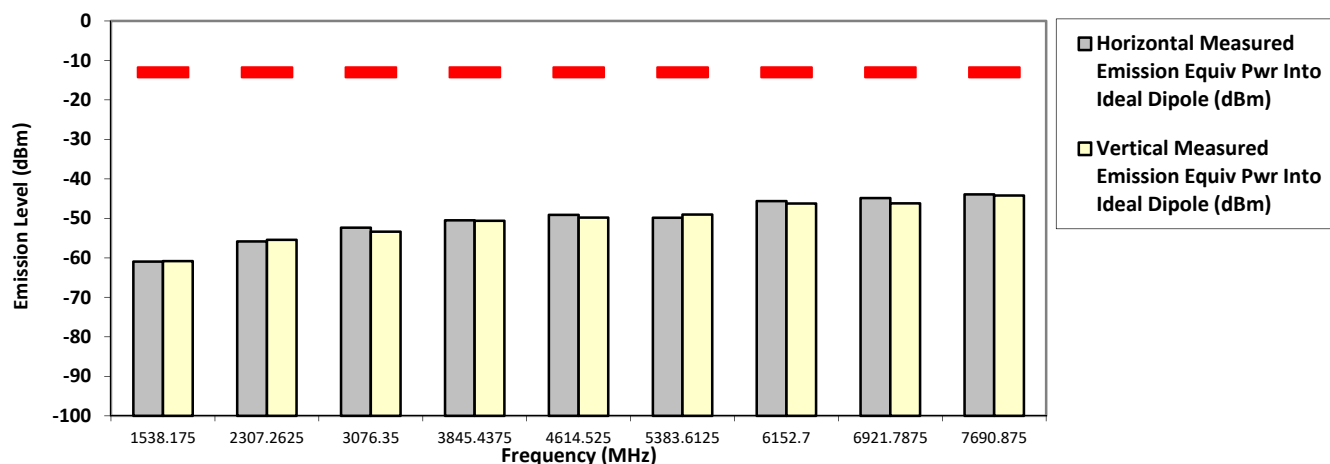

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N:** G0P0UX0X3C **SR:**03466-EMC-00243
Battery Part No: NA **Accy Part No:** HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1, HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02
Test Mode: TX Analog
774.887500 MHz **25 kHz** **36.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1424.3500	-13.0000	-54.5000 *	-56.2000 *
1456.2000	-13.0000	-53.7700 *	-54.3200 *
1549.7750	-13.0000	-61.0720 **	-60.6742 **
2324.6625	-13.0000	-56.8017 **	-55.9509 **
3099.5500	-13.0000	-51.9069 **	-50.6411 **
3874.4375	-13.0000	-53.0813 **	-52.7929 **
4649.3250	-13.0000	-47.5992 **	-49.4021 **
5424.2125	-13.0000	-48.8054 **	-47.7631 **
6199.1000	-13.0000	-46.0707 **	-43.4360 **
6973.9875	-13.0000	-45.3211 **	-46.3509 **
7748.8750	-13.0000	-44.2752 **	-44.9851 **

RADIATED SPURIOUS EMISSIONS

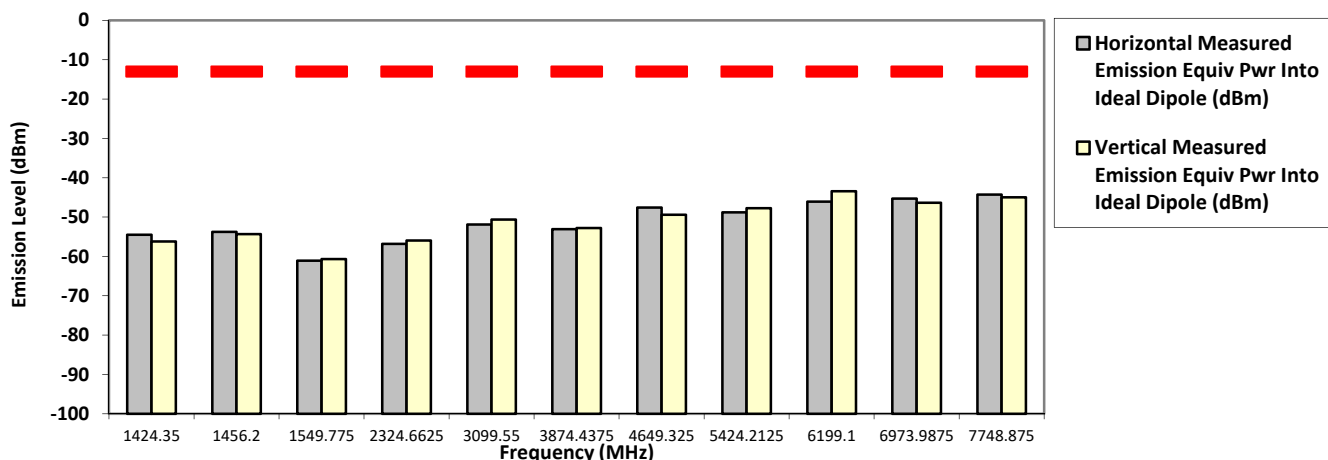

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sat, 19 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


774.887500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-60.6317 **	-61.1535 **
2324.6625	-13.0000	-56.0884 **	-56.1873 **
3099.5500	-13.0000	-52.9735 **	-52.5773 **
3874.4375	-13.0000	-52.2244 **	-50.3731 **
4649.3250	-13.0000	-49.9129 **	-48.2452 **
5424.2125	-13.0000	-48.8419 **	-48.8475 **
6199.1000	-13.0000	-46.0152 **	-46.8859 **
6973.9875	-13.0000	-45.6915 **	-44.0733 **
7748.8750	-13.0000	-43.3340 **	-42.3697 **

RADIATED SPURIOUS EMISSIONS

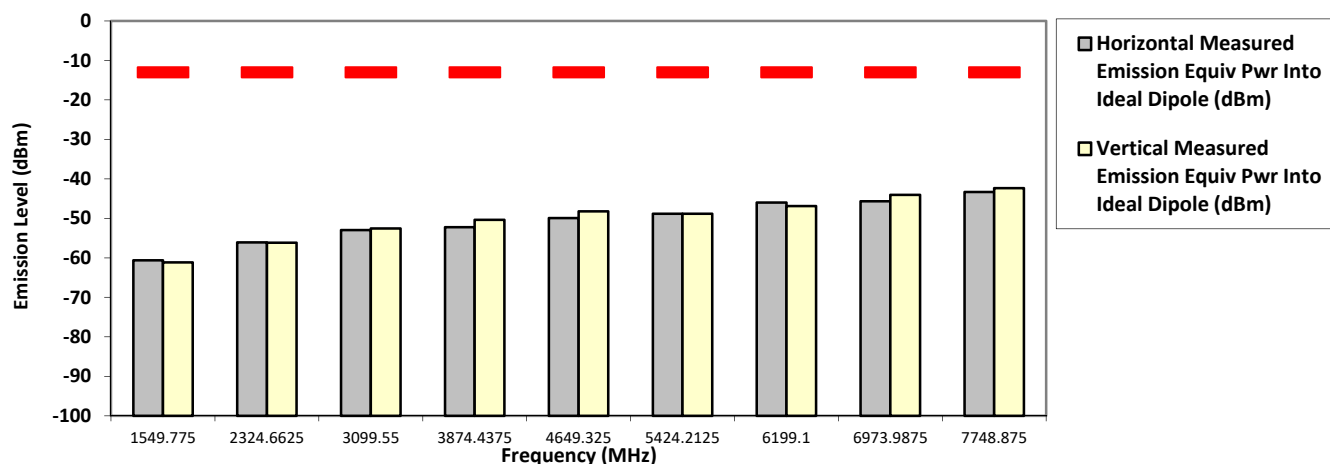

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin
Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


794.012500 MHz (Not for FCC review)

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-60.4304 **	-59.1756 **
2382.0375	-13.0000	-55.5339 **	-55.0211 **
3176.0500	-13.0000	-52.4001 **	-50.9152 **
3970.0625	-13.0000	-50.8268 **	-50.8880 **
4764.0750	-13.0000	-49.2460 **	-48.7730 **
5558.0875	-13.0000	-48.0680 **	-46.7674 **
6352.1000	-13.0000	-46.3251 **	-47.3944 **
7146.1125	-13.0000	-44.4982 **	-44.2641 **
7940.1250	-13.0000	-41.7347 **	-43.0280 **

RADIATED SPURIOUS EMISSIONS

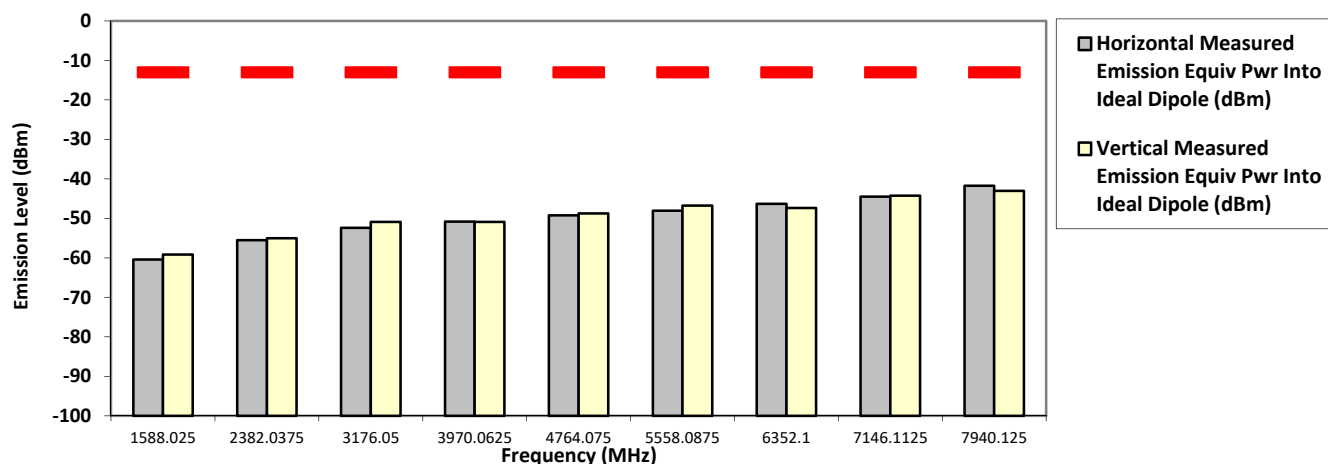

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


794.012500 MHz (Not for FCC review)

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-59.1560 **	-59.2267 **
2382.0375	-13.0000	-55.4839 **	-55.3942 **
3176.0500	-13.0000	-51.2915 **	-52.8867 **
3970.0625	-13.0000	-50.3199 **	-50.8546 **
4764.0750	-13.0000	-48.8759 **	-49.0337 **
5558.0875	-13.0000	-48.5868 **	-48.4813 **
6352.1000	-13.0000	-45.2970 **	-46.4435 **
7146.1125	-13.0000	-44.1255 **	-44.3881 **
7940.1250	-13.0000	-44.3399 **	-43.5116 **

RADIATED SPURIOUS EMISSIONS

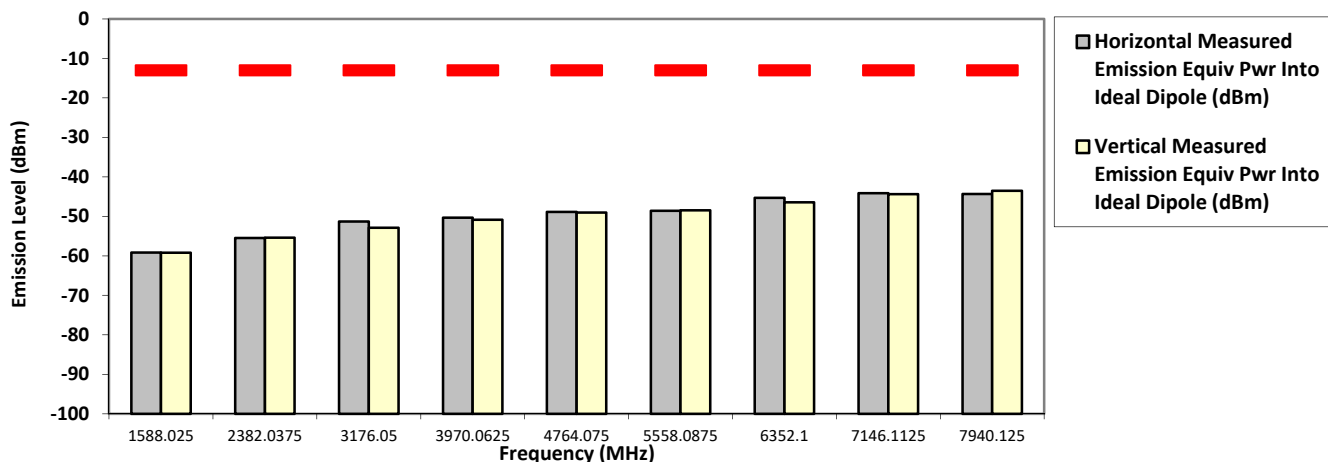

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


799.087500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-59.2636 **	-60.3638 **
2397.2625	-13.0000	-54.6656 **	-55.5287 **
3196.3500	-13.0000	-51.8029 **	-52.4329 **
3995.4375	-13.0000	-51.1982 **	-50.8043 **
4794.5250	-13.0000	-49.2008 **	-49.2938 **
5593.6125	-13.0000	-49.6265 **	-47.6381 **
6392.7000	-13.0000	-46.3219 **	-45.3918 **
7191.7875	-13.0000	-43.9230 **	-44.1828 **
7990.8750	-13.0000	-42.4227 **	-42.1899 **

RADIATED SPURIOUS EMISSIONS

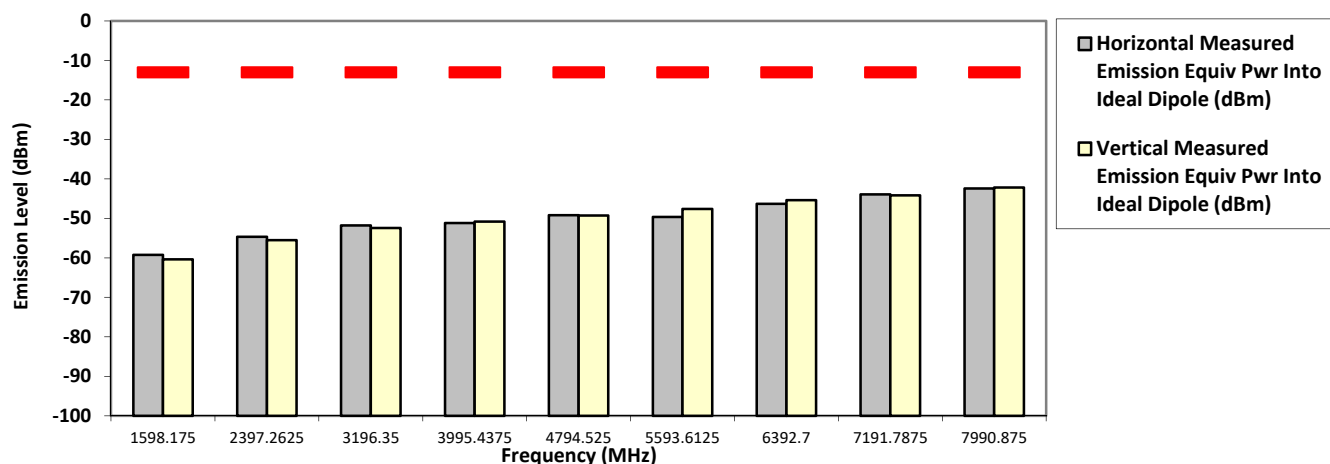

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


799.087500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-59.4917 **	-59.3986 **
2397.2625	-13.0000	-55.8446 **	-55.8750 **
3196.3500	-13.0000	-51.7084 **	-51.2853 **
3995.4375	-13.0000	-50.5844 **	-49.8326 **
4794.5250	-13.0000	-49.7169 **	-49.5307 **
5593.6125	-13.0000	-47.9381 **	-48.4601 **
6392.7000	-13.0000	-46.9415 **	-45.9917 **
7191.7875	-13.0000	-43.7213 **	-43.6145 **
7990.8750	-13.0000	-41.7939 **	-42.5417 **

RADIATED SPURIOUS EMISSIONS

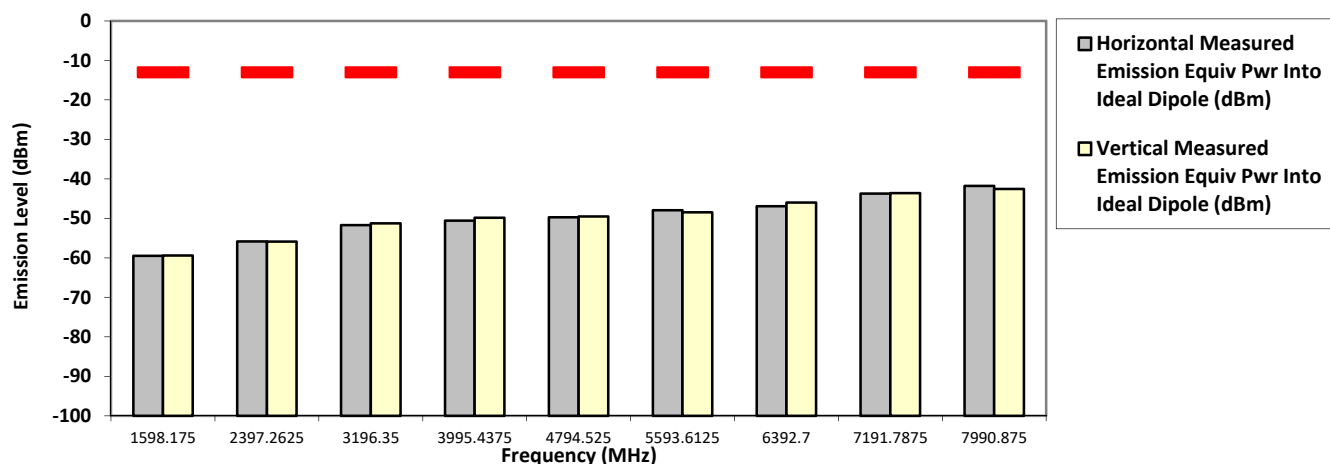

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin
Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N:** G0P0UX0X3C **SR:** 03466-EMC-00243
Battery Part No: NA **Accy Part No:** HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1, HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02
Test Mode: TX Analog
804.912500 MHz **25 kHz** **36.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1456.5800	-13.0000	-54.9900 *	-54.6600 *
1472.1800	-13.0000	-56.3100 *	-55.4400 *
1609.8250	-13.0000	-62.1893 **	-60.5042 **
2414.7375	-13.0000	-56.0757 **	-56.7188 **
3219.6500	-13.0000	-53.0519 **	-52.8054 **
4024.5625	-13.0000	-50.2539 **	-52.1362 **
4829.4750	-13.0000	-48.4331 **	-48.7352 **
5634.3875	-13.0000	-49.5430 **	-48.7290 **
6439.3000	-13.0000	-47.2905 **	-47.1207 **
7244.2125	-13.0000	-44.1857 **	-44.7550 **
8049.1250	-13.0000	-44.6866 **	-45.2187 **

RADIATED SPURIOUS EMISSIONS

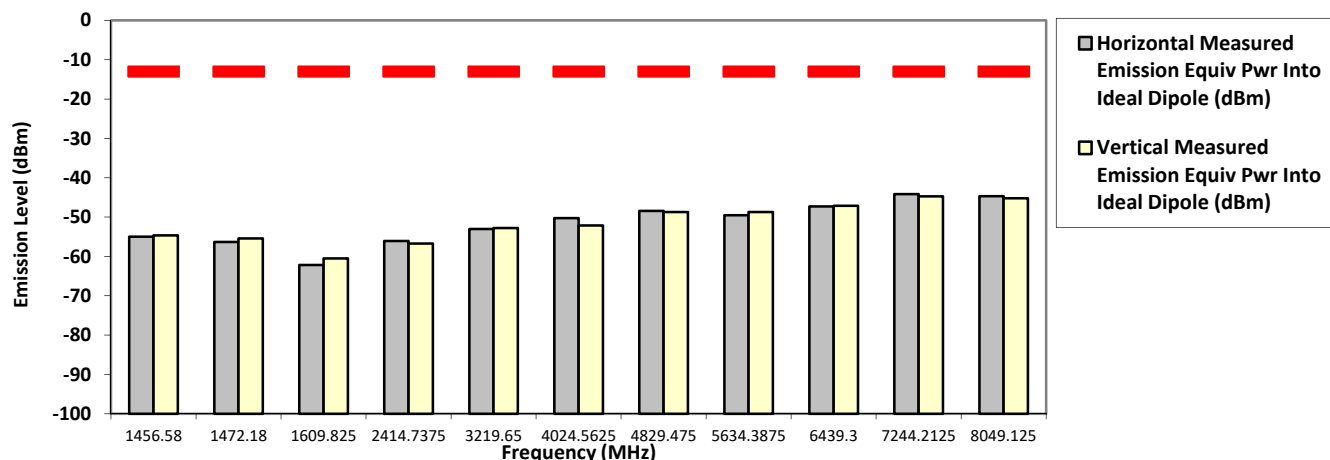

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Aiman Sat, 19 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX Analog

SR:03466-EMC-00198


804.912500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-60.0430 **	-60.0415 **
2414.7375	-13.0000	-52.7183 **	-54.8017 **
3219.6500	-13.0000	-52.5709 **	-50.7472 **
4024.5625	-13.0000	-50.0427 **	-49.8640 **
4829.4750	-13.0000	-49.5035 **	-49.4071 **
5634.3875	-13.0000	-48.7198 **	-47.8522 **
6439.3000	-13.0000	-45.4588 **	-46.6631 **
7244.2125	-13.0000	-44.8776 **	-43.6083 **
8049.1250	-13.0000	-44.7770 **	-44.0728 **

RADIATED SPURIOUS EMISSIONS

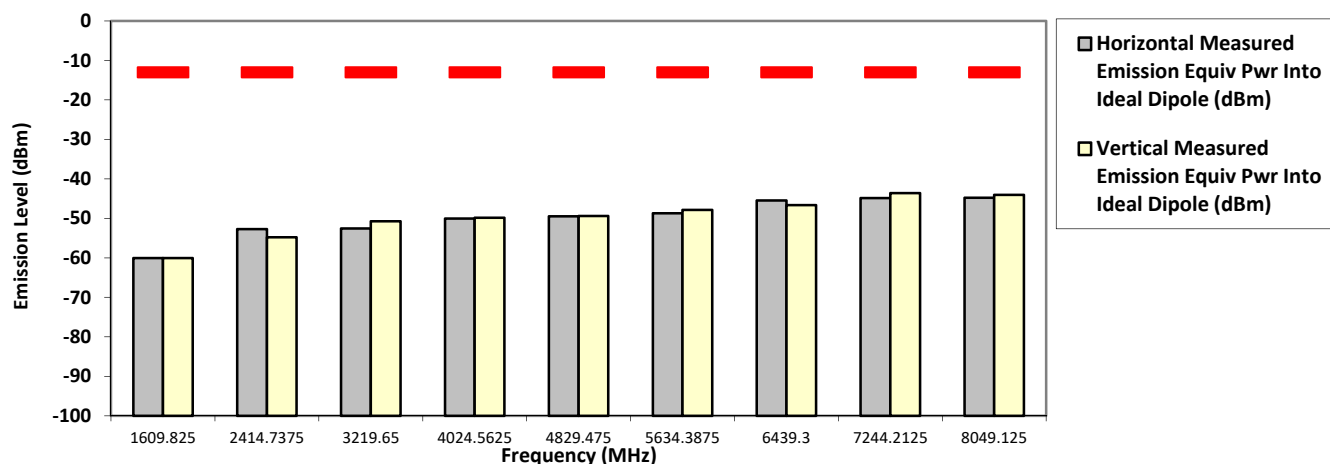

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

Model Number: M37TSS9PW1AN **SAC Transmitter Radiated Emission:** S/N: 681TXT7177 **SR:**03466-EMC-00198
Battery Part No: NA **Accy Part No:** AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX APCO Digital C4FM **12.5 kHz**
764.012500 MHz (Not for FCC review) **36.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-61.0700 **	-61.5493 **
2292.0375	-13.0000	-56.4636 **	-55.9134 **
3056.0500	-13.0000	-52.8714 **	-53.3612 **
3820.0625	-13.0000	-50.8511 **	-51.5070 **
4584.0750	-13.0000	-49.2554 **	-50.1253 **
5348.0875	-13.0000	-48.9967 **	-49.1937 **
6112.1000	-13.0000	-47.1028 **	-45.9814 **
6876.1125	-13.0000	-45.4575 **	-44.3477 **
7640.1250	-13.0000	-43.4875 **	-44.1895 **

RADIATED SPURIOUS EMISSIONS

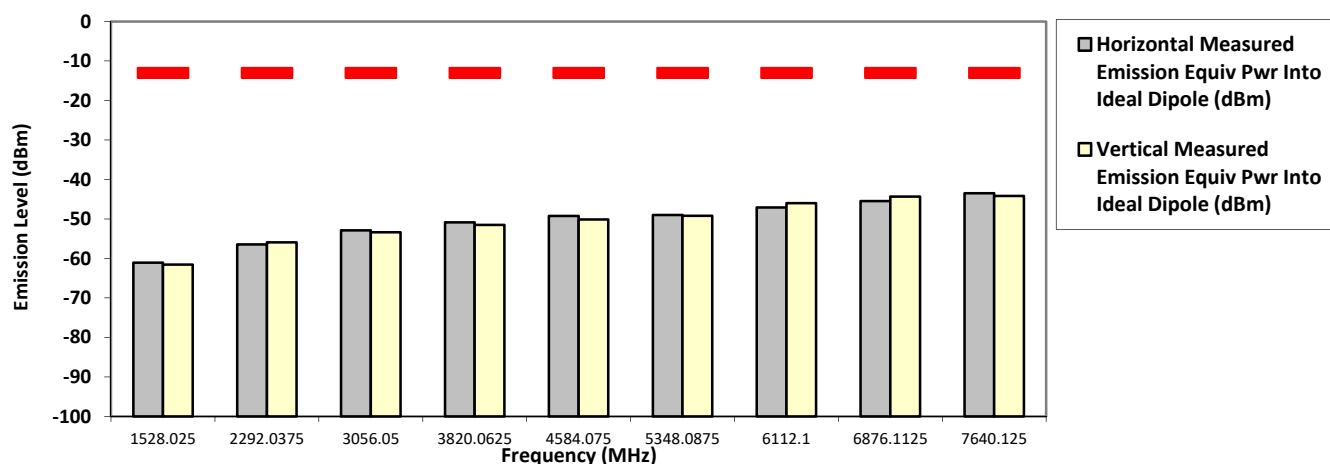

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


764.012500 MHz (Not for FCC review)

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-59.6615 **	-61.7106 **
2292.0375	-13.0000	-57.4826 **	-57.0004 **
3056.0500	-13.0000	-54.1140 **	-52.8324 **
3820.0625	-13.0000	-52.0747 **	-50.9983 **
4584.0750	-13.0000	-49.9350 **	-49.3860 **
5348.0875	-13.0000	-49.5845 **	-48.9263 **
6112.1000	-13.0000	-47.1068 **	-46.5449 **
6876.1125	-13.0000	-45.6827 **	-45.8584 **
7640.1250	-13.0000	-43.8013 **	-41.9494 **

RADIATED SPURIOUS EMISSIONS

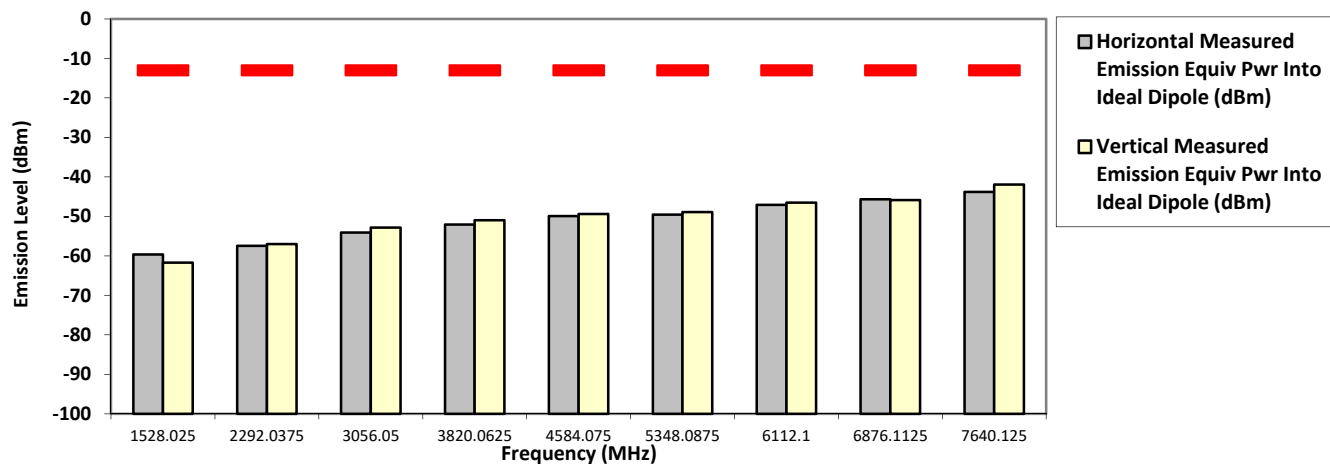

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


769.012500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.0250	-13.0000	-60.9914 **	-59.7675 **
2307.0375	-13.0000	-56.3746 **	-56.9429 **
3076.0500	-13.0000	-52.0985 **	-53.0863 **
3845.0625	-13.0000	-51.2243 **	-52.0016 **
4614.0750	-13.0000	-49.5197 **	-49.3204 **
5383.0875	-13.0000	-49.2582 **	-47.5439 **
6152.1000	-13.0000	-46.4645 **	-45.1873 **
6921.1125	-13.0000	-45.7393 **	-45.2297 **
7690.1250	-13.0000	-43.2543 **	-44.4976 **

RADIATED SPURIOUS EMISSIONS

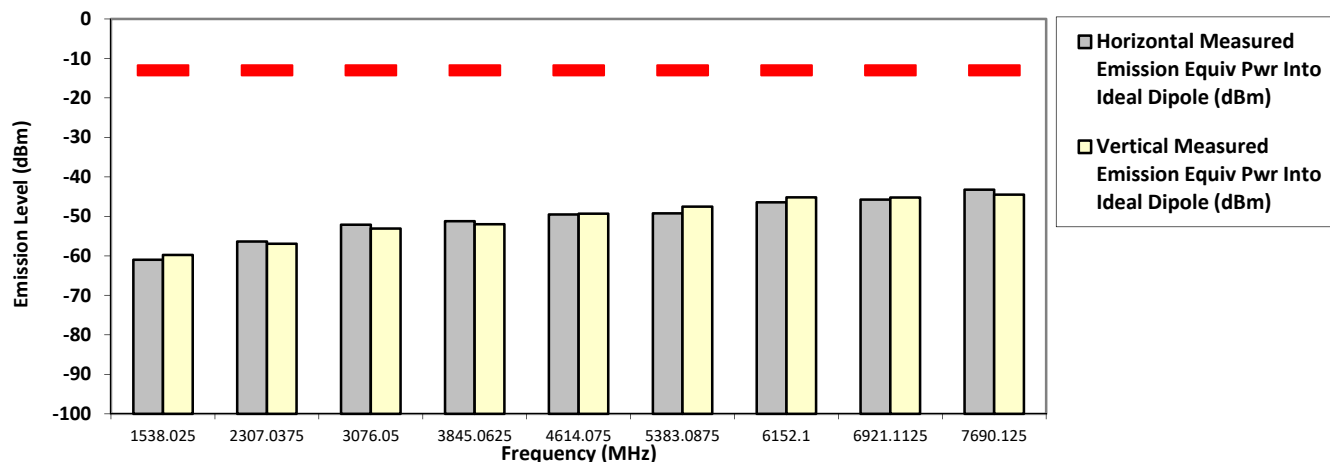

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


769.087500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-61.2753 **	-59.9193 **
2307.2625	-13.0000	-57.5013 **	-57.7421 **
3076.3500	-13.0000	-51.9305 **	-52.2964 **
3845.4375	-13.0000	-51.3748 **	-51.3420 **
4614.5250	-13.0000	-48.9997 **	-49.4199 **
5383.6125	-13.0000	-49.2179 **	-49.2837 **
6152.7000	-13.0000	-45.1523 **	-45.4214 **
6921.7875	-13.0000	-45.9132 **	-45.1854 **
7690.8750	-13.0000	-44.0581 **	-44.3120 **

RADIATED SPURIOUS EMISSIONS

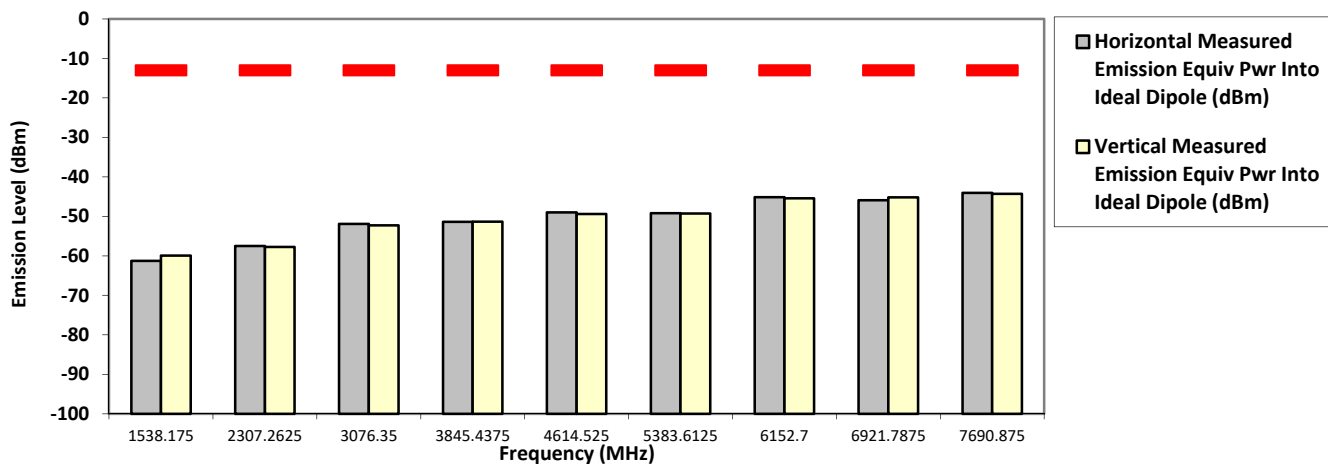

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


769.087500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.7824 **	-60.8990 **
2307.2625	-13.0000	-57.9596 **	-56.3665 **
3076.3500	-13.0000	-52.1138 **	-51.0577 **
3845.4375	-13.0000	-51.9170 **	-51.4941 **
4614.5250	-13.0000	-48.8177 **	-48.6339 **
5383.6125	-13.0000	-48.8711 **	-48.5069 **
6152.7000	-13.0000	-45.7651 **	-47.1394 **
6921.7875	-13.0000	-43.0131 **	-43.5980 **
7690.8750	-13.0000	-44.3987 **	-44.3513 **

RADIATED SPURIOUS EMISSIONS

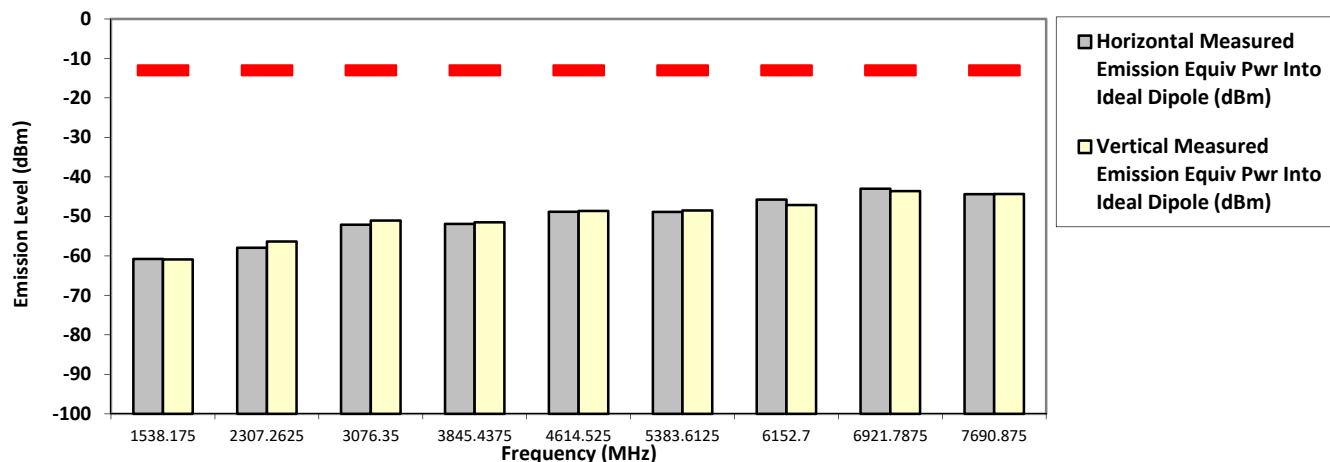

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N:** G0P0UX0X3C **SR:** 03466-EMC-00243
Battery Part No: NA **Accy Part No:** HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1, HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02
Test Mode: TX Digital


774.887500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1424.0000	-13.0000	-56.9800 *	-56.0500 *
1456.2000	-13.0000	-53.3100 *	-55.1400 *
1472.3000	-13.0000	-54.2700 *	-56.0000 *
1549.7750	-13.0000	-61.1103 **	-60.7577 **
2324.6625	-13.0000	-56.4634 **	-55.6689 **
3099.5500	-13.0000	-53.3402 **	-52.4176 **
3874.4375	-13.0000	-51.6759 **	-52.1430 **
4649.3250	-13.0000	-50.2468 **	-50.5955 **
5424.2125	-13.0000	-50.5264 **	-48.6885 **
6199.1000	-13.0000	-46.4086 **	-46.6017 **
6973.9875	-13.0000	-46.2734 **	-45.4096 **
7748.8750	-13.0000	-43.5704 **	-43.6018 **

RADIATED SPURIOUS EMISSIONS

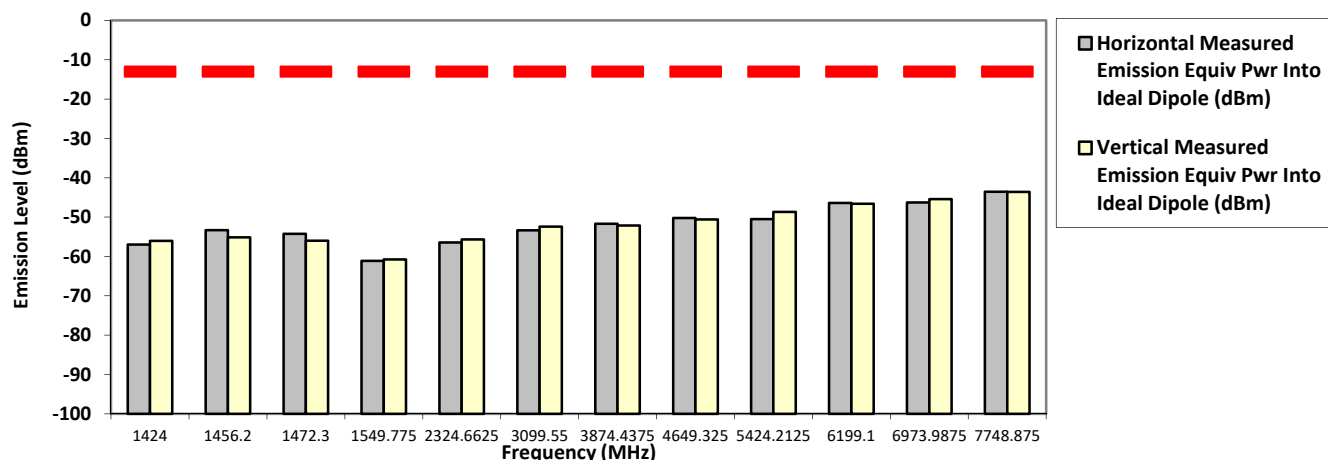

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Faris Sat, 19 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


774.887500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-60.1143 **	-58.8757 **
2324.6625	-13.0000	-56.9420 **	-55.0010 **
3099.5500	-13.0000	-51.1979 **	-51.1002 **
3874.4375	-13.0000	-52.4648 **	-51.6242 **
4649.3250	-13.0000	-48.7988 **	-48.1586 **
5424.2125	-13.0000	-48.5636 **	-49.0486 **
6199.1000	-13.0000	-47.2408 **	-45.5235 **
6973.9875	-13.0000	-44.7390 **	-45.7113 **
7748.8750	-13.0000	-44.5350 **	-44.3268 **

RADIATED SPURIOUS EMISSIONS

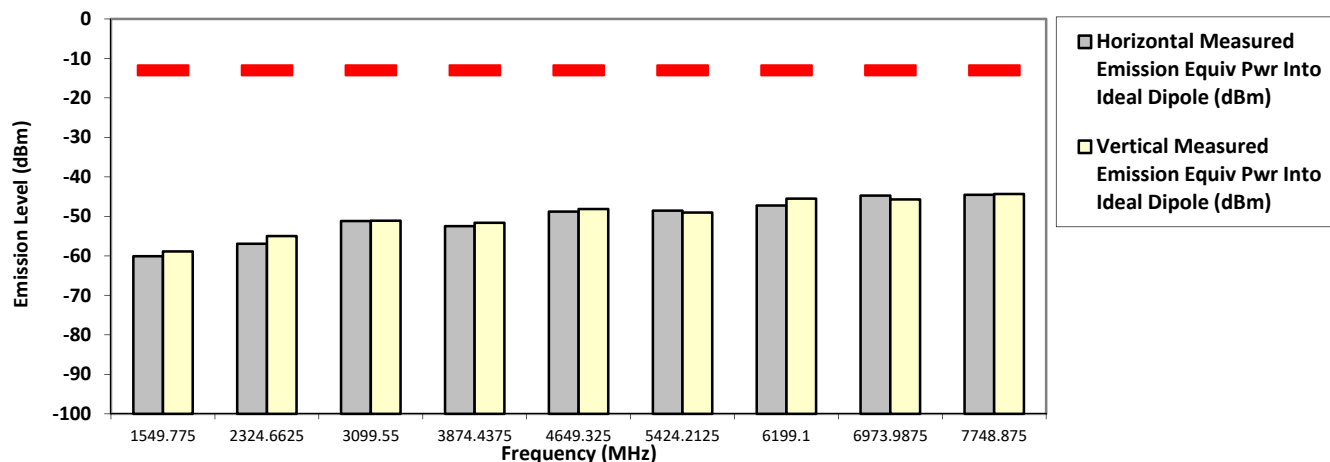

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


794.012500 MHz (Not for FCC review)

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-59.5918 **	-59.3673 **
2382.0375	-13.0000	-55.6273 **	-56.3228 **
3176.0500	-13.0000	-52.4607 **	-52.3589 **
3970.0625	-13.0000	-52.1796 **	-51.4173 **
4764.0750	-13.0000	-48.4924 **	-49.7793 **
5558.0875	-13.0000	-47.3879 **	-48.6711 **
6352.1000	-13.0000	-45.0757 **	-46.8246 **
7146.1125	-13.0000	-44.3861 **	-44.4812 **
7940.1250	-13.0000	-43.9512 **	-44.0407 **

RADIATED SPURIOUS EMISSIONS

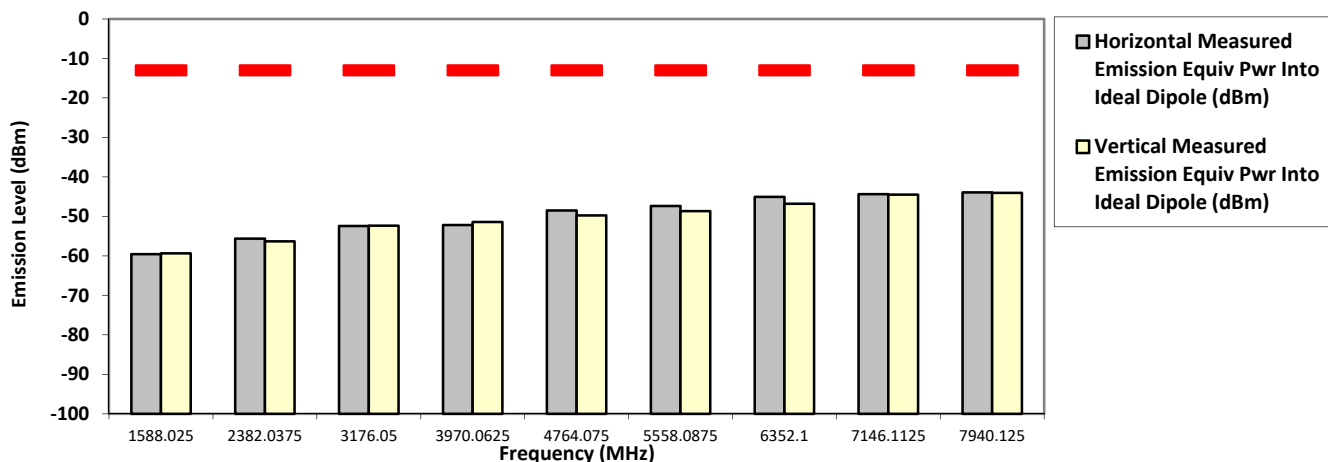

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


794.012500 MHz (Not for FCC review)

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-59.9243 **	-60.6650 **
2382.0375	-13.0000	-54.4871 **	-55.6061 **
3176.0500	-13.0000	-50.9025 **	-52.3412 **
3970.0625	-13.0000	-51.7286 **	-49.2665 **
4764.0750	-13.0000	-49.2014 **	-48.9804 **
5558.0875	-13.0000	-48.9356 **	-48.0739 **
6352.1000	-13.0000	-46.6211 **	-45.7646 **
7146.1125	-13.0000	-43.9645 **	-45.3744 **
7940.1250	-13.0000	-42.7025 **	-42.9636 **

RADIATED SPURIOUS EMISSIONS

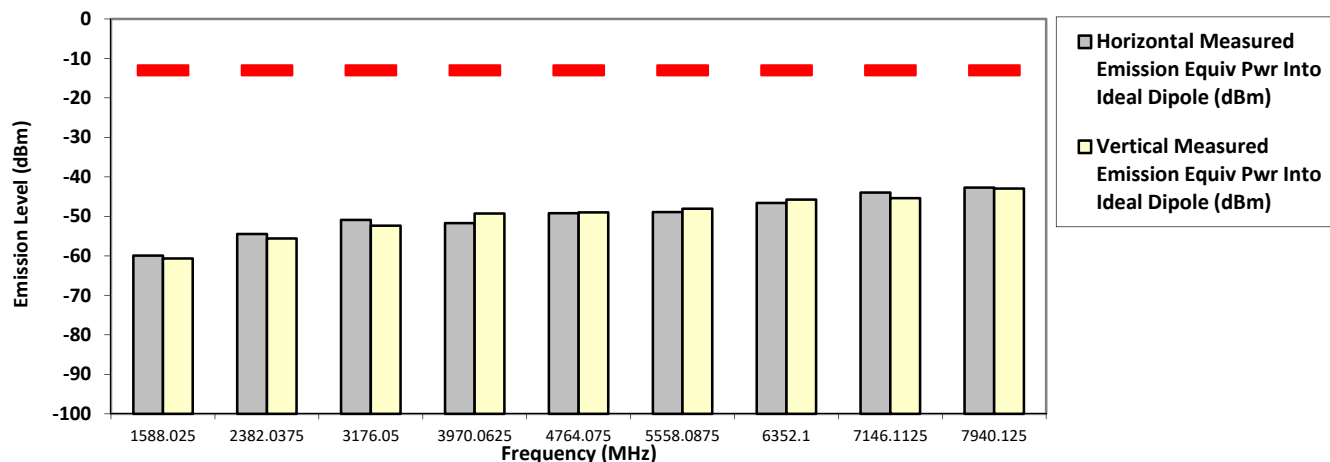

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:
S/N: 681TXT7177
Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX APCO Digital C4FM
12.5 kHz
36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.1651 **	-60.1228 **
2397.2625	-13.0000	-55.2755 **	-54.2879 **
3196.3500	-13.0000	-51.9491 **	-51.2350 **
3995.4375	-13.0000	-50.6632 **	-51.9709 **
4794.5250	-13.0000	-49.4220 **	-48.3553 **
5593.6125	-13.0000	-48.5223 **	-47.7146 **
6392.7000	-13.0000	-46.3011 **	-46.3673 **
7191.7875	-13.0000	-42.2640 **	-43.8789 **
7990.8750	-13.0000	-42.4810 **	-43.6935 **

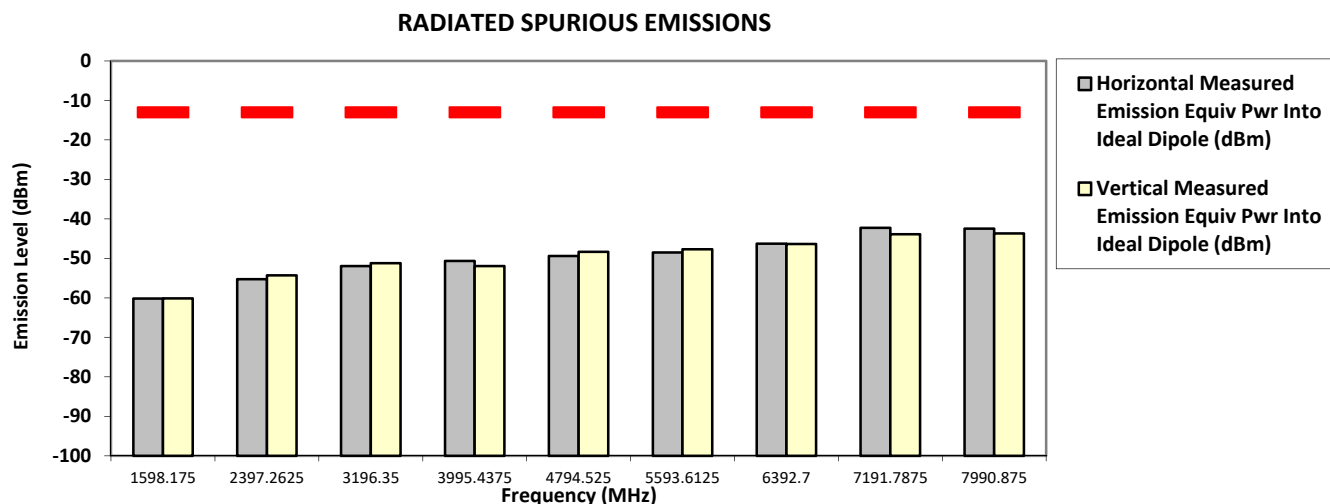

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin
Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks: Passed Results Marginal Results Failed Results

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


799.087500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.4294 **	-60.2059 **
2397.2625	-13.0000	-55.5860 **	-56.0164 **
3196.3500	-13.0000	-52.8455 **	-52.0613 **
3995.4375	-13.0000	-51.9161 **	-51.0822 **
4794.5250	-13.0000	-48.9666 **	-49.3029 **
5593.6125	-13.0000	-46.5147 **	-48.2355 **
6392.7000	-13.0000	-47.2427 **	-46.5218 **
7191.7875	-13.0000	-44.3330 **	-44.3972 **
7990.8750	-13.0000	-42.6745 **	-43.8880 **

RADIATED SPURIOUS EMISSIONS

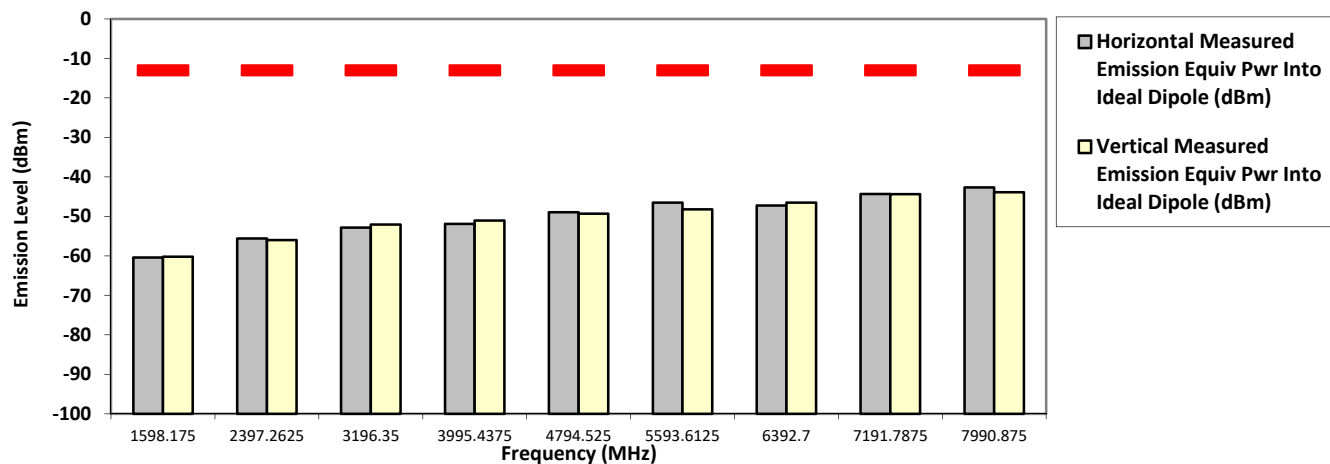

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N: G0P0UX0X3C** **SR:03466-EMC-00243**
Battery Part No: NA **Accy Part No: HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1, HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02**
Test Mode: TX Digital
804.912500 MHz **12.5 kHz** **36.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1424.5800	-13.0000	-56.0400 *	-56.1300 *
1456.5800	-13.0000	-54.3000 *	-54.9100 *
1609.8250	-13.0000	-60.4998 **	-61.0339 **
2414.7375	-13.0000	-56.4816 **	-56.4932 **
3219.6500	-13.0000	-53.5392 **	-52.5997 **
4024.5625	-13.0000	-52.1154 **	-52.4663 **
4829.4750	-13.0000	-49.3677 **	-49.6501 **
5634.3875	-13.0000	-48.5073 **	-49.2291 **
6439.3000	-13.0000	-47.1416 **	-46.9322 **
7244.2125	-13.0000	-43.9913 **	-43.2530 **
8049.1250	-13.0000	-43.8507 **	-44.2371 **

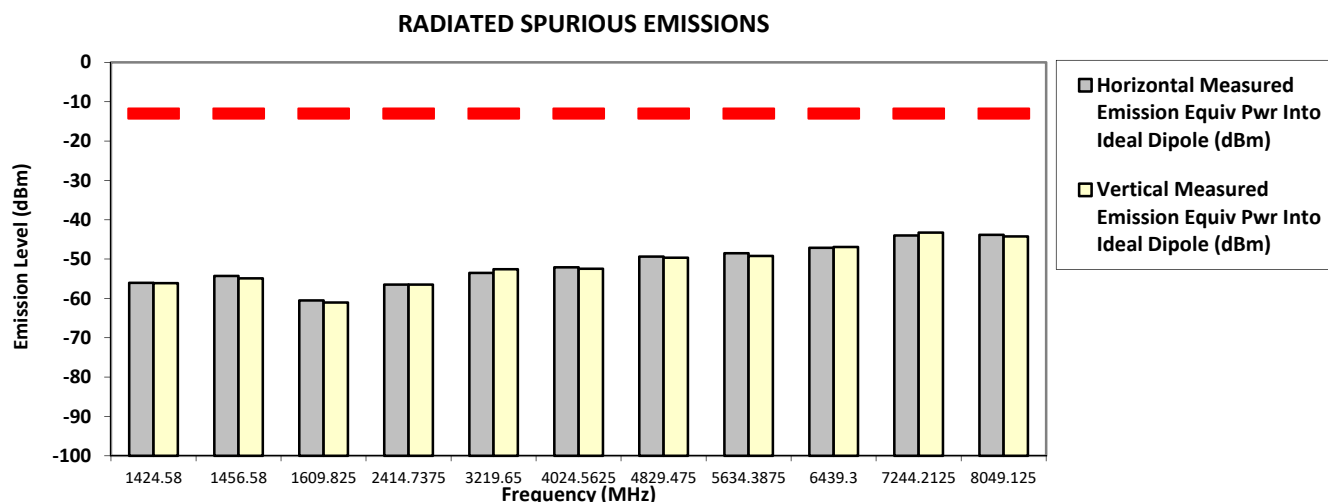

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Faris Sun, 20 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

Remarks: Passed Results Marginal Results Failed Results

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital C4FM


804.912500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-59.5531 **	-59.7842 **
2414.7375	-13.0000	-54.8833 **	-55.2217 **
3219.6500	-13.0000	-50.4774 **	-51.6860 **
4024.5625	-13.0000	-50.9029 **	-50.7138 **
4829.4750	-13.0000	-48.0012 **	-46.9152 **
5634.3875	-13.0000	-47.9487 **	-48.3861 **
6439.3000	-13.0000	-46.2508 **	-45.8777 **
7244.2125	-13.0000	-43.2777 **	-42.9747 **
8049.1250	-13.0000	-42.6731 **	-42.4871 **

RADIATED SPURIOUS EMISSIONS

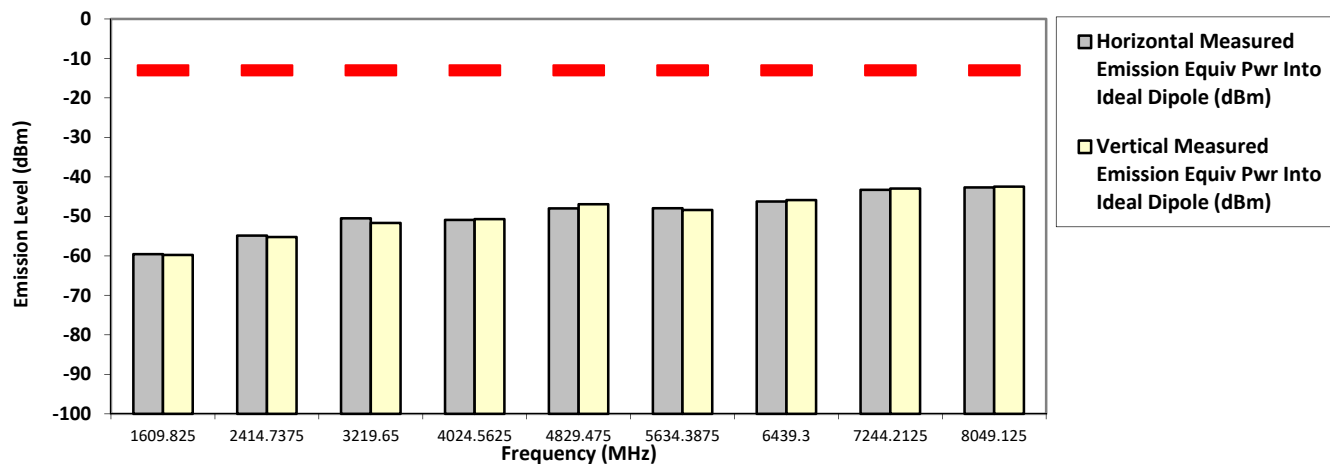

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


764.012500 MHz (Not for FCC review)

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-59.5541 **	-61.2557 **
2292.0375	-13.0000	-56.8539 **	-57.1067 **
3056.0500	-13.0000	-53.4681 **	-52.2986 **
3820.0625	-13.0000	-51.1207 **	-52.0260 **
4584.0750	-13.0000	-50.0492 **	-49.9055 **
5348.0875	-13.0000	-49.3868 **	-48.1325 **
6112.1000	-13.0000	-46.4827 **	-46.1516 **
6876.1125	-13.0000	-44.7648 **	-44.6370 **
7640.1250	-13.0000	-43.1739 **	-41.9185 **

RADIATED SPURIOUS EMISSIONS

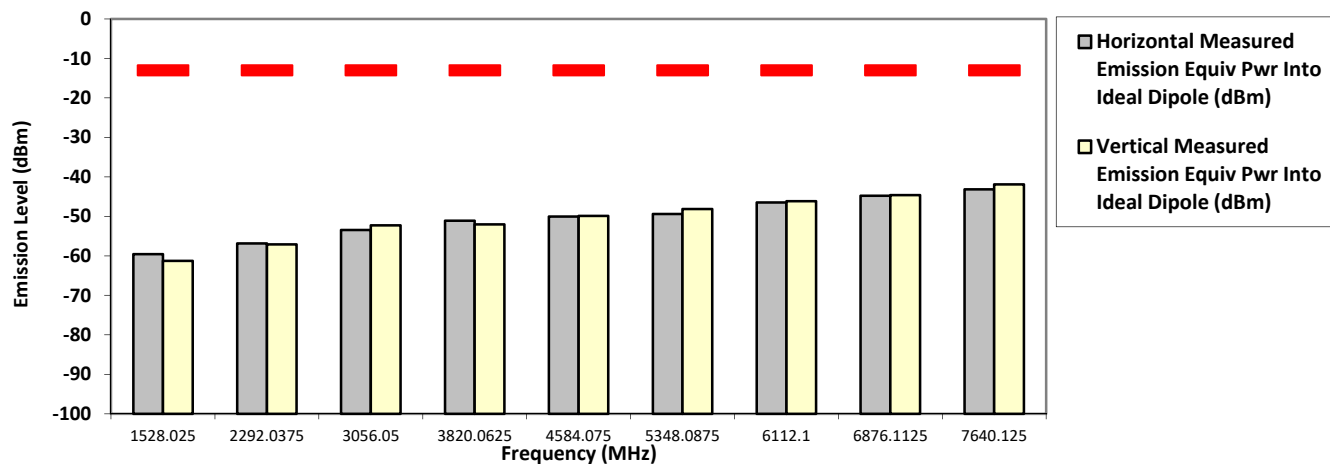

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


764.012500 MHz (Not for FCC review)

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-60.7045 **	-60.8127 **
2292.0375	-13.0000	-56.1415 **	-56.5822 **
3056.0500	-13.0000	-52.7026 **	-53.3585 **
3820.0625	-13.0000	-51.9402 **	-52.6072 **
4584.0750	-13.0000	-50.0808 **	-50.6275 **
5348.0875	-13.0000	-48.4976 **	-48.2238 **
6112.1000	-13.0000	-45.8836 **	-46.5995 **
6876.1125	-13.0000	-44.5620 **	-44.7331 **
7640.1250	-13.0000	-43.2312 **	-42.8297 **

RADIATED SPURIOUS EMISSIONS

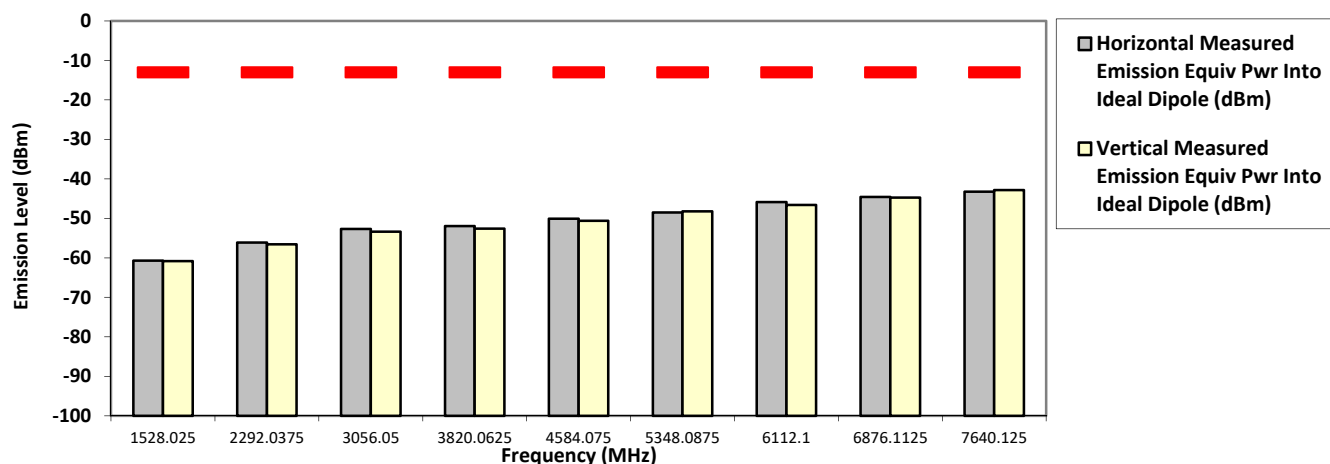

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


769.012500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.0250	-13.0000	-61.0907 **	-60.1904 **
2307.0375	-13.0000	-56.8145 **	-56.3135 **
3076.0500	-13.0000	-53.4114 **	-52.5921 **
3845.0625	-13.0000	-51.6819 **	-50.8582 **
4614.0750	-13.0000	-49.3751 **	-49.3443 **
5383.0875	-13.0000	-49.1149 **	-47.2748 **
6152.1000	-13.0000	-47.9380 **	-45.8621 **
6921.1125	-13.0000	-44.5752 **	-43.3870 **
7690.1250	-13.0000	-43.2585 **	-42.7148 **

RADIATED SPURIOUS EMISSIONS

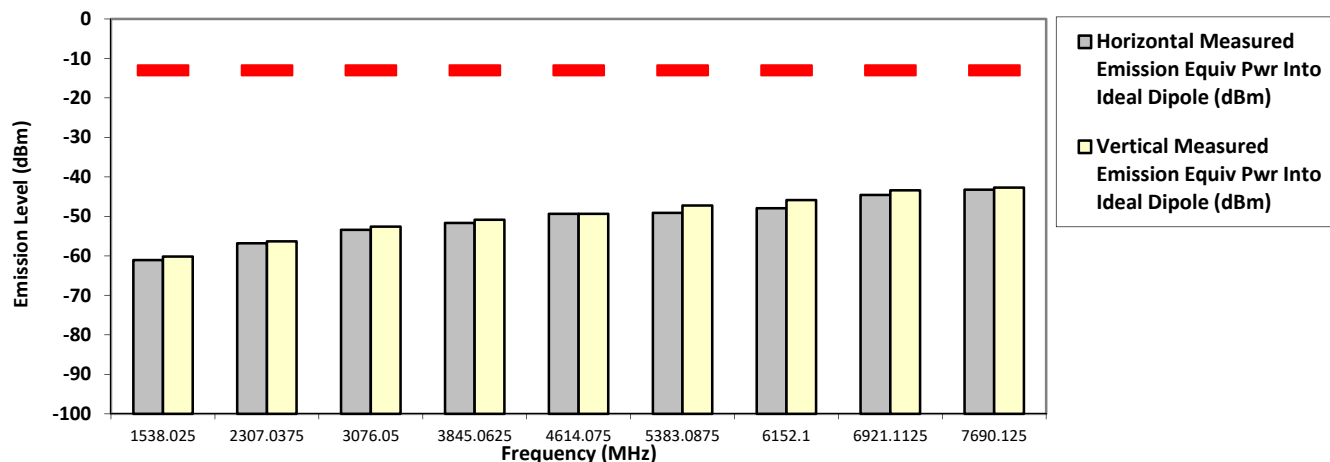

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


769.087500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.9356 **	-60.1407 **
2307.2625	-13.0000	-56.9581 **	-56.3724 **
3076.3500	-13.0000	-53.4669 **	-51.7619 **
3845.4375	-13.0000	-51.0938 **	-52.0901 **
4614.5250	-13.0000	-50.2746 **	-49.9423 **
5383.6125	-13.0000	-49.0917 **	-49.3665 **
6152.7000	-13.0000	-46.7771 **	-46.6561 **
6921.7875	-13.0000	-45.4591 **	-46.3200 **
7690.8750	-13.0000	-42.8984 **	-42.7582 **

RADIATED SPURIOUS EMISSIONS

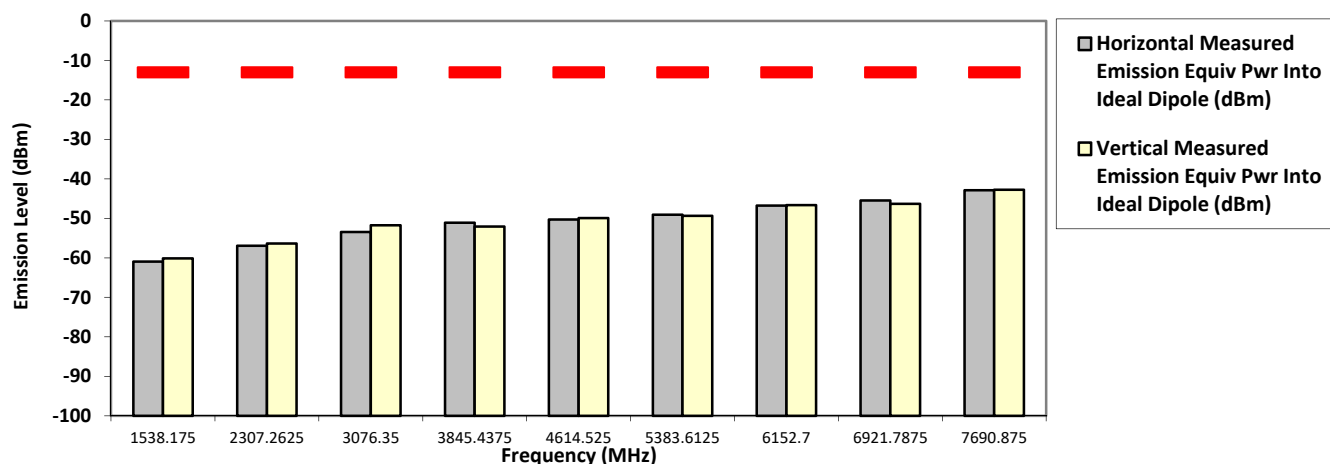

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


769.087500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.8285 **	-60.6085 **
2307.2625	-13.0000	-55.6884 **	-55.7380 **
3076.3500	-13.0000	-51.9297 **	-51.5112 **
3845.4375	-13.0000	-51.0840 **	-50.7875 **
4614.5250	-13.0000	-49.0698 **	-50.0482 **
5383.6125	-13.0000	-48.5840 **	-48.2569 **
6152.7000	-13.0000	-47.6997 **	-47.1863 **
6921.7875	-13.0000	-44.1908 **	-45.5052 **
7690.8750	-13.0000	-42.1726 **	-43.8689 **

RADIATED SPURIOUS EMISSIONS

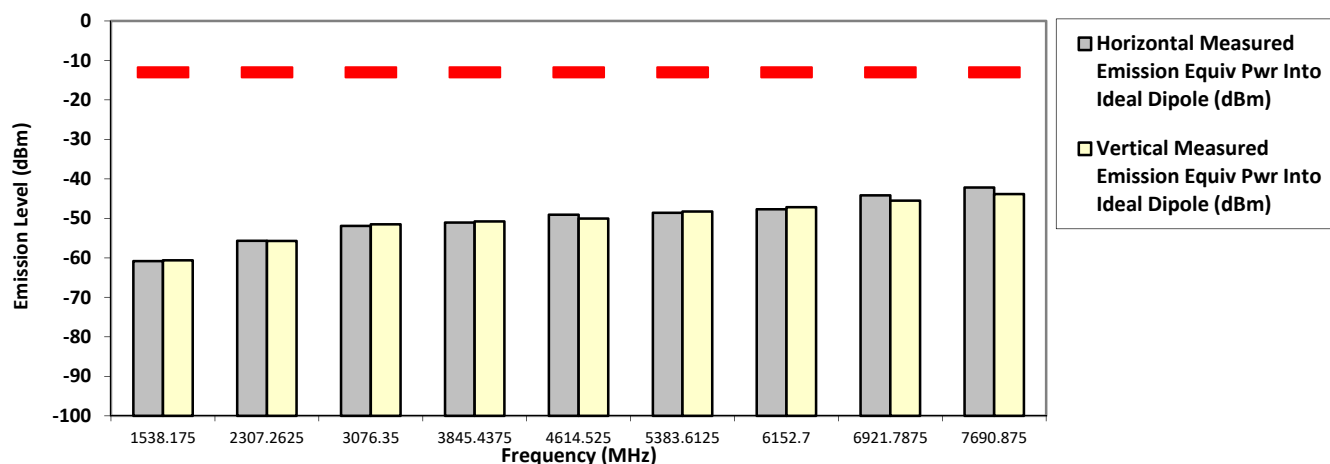

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N:** G0P0UX0X3C **SR:**03466-EMC-00243
Battery Part No: NA **Accy Part No:** HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1,
HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02
Test Mode: TX APCO Digital Phase II


774.887500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1455.5000	-13.0000	-54.0100 *	-55.4800 *
1456.2000	-13.0000	-53.5700 *	-55.5100 *
1549.7750	-13.0000	-61.8302 **	-61.1379 **
2324.6625	-13.0000	-57.9324 **	-55.1944 **
3099.5500	-13.0000	-53.4228 **	-52.1202 **
3874.4375	-13.0000	-52.7043 **	-52.1945 **
4649.3250	-13.0000	-48.4720 **	-49.9539 **
5424.2125	-13.0000	-48.8851 **	-48.4268 **
6199.1000	-13.0000	-46.5385 **	-45.6631 **
6973.9875	-13.0000	-46.1959 **	-45.7343 **
7748.8750	-13.0000	-44.2348 **	-44.2954 **

RADIATED SPURIOUS EMISSIONS

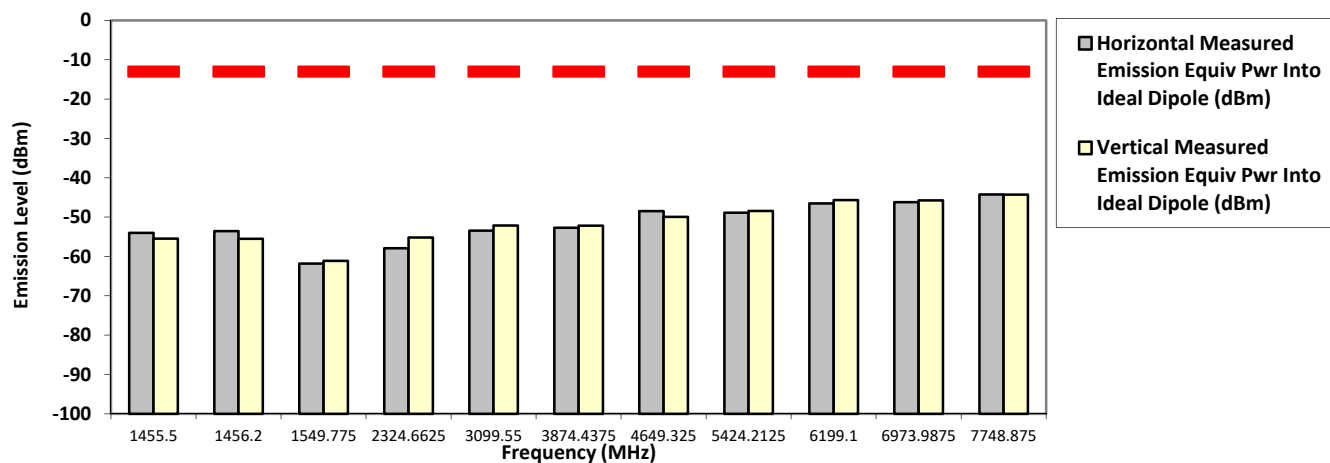

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Faris Sun, 20 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


774.887500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-60.1388 **	-59.3307 **
2324.6625	-13.0000	-56.8904 **	-56.3343 **
3099.5500	-13.0000	-51.6763 **	-51.1965 **
3874.4375	-13.0000	-51.0215 **	-50.8718 **
4649.3250	-13.0000	-49.6763 **	-50.2168 **
5424.2125	-13.0000	-48.5779 **	-48.3038 **
6199.1000	-13.0000	-46.2777 **	-45.9435 **
6973.9875	-13.0000	-44.7283 **	-45.7122 **
7748.8750	-13.0000	-45.1533 **	-43.3880 **

RADIATED SPURIOUS EMISSIONS

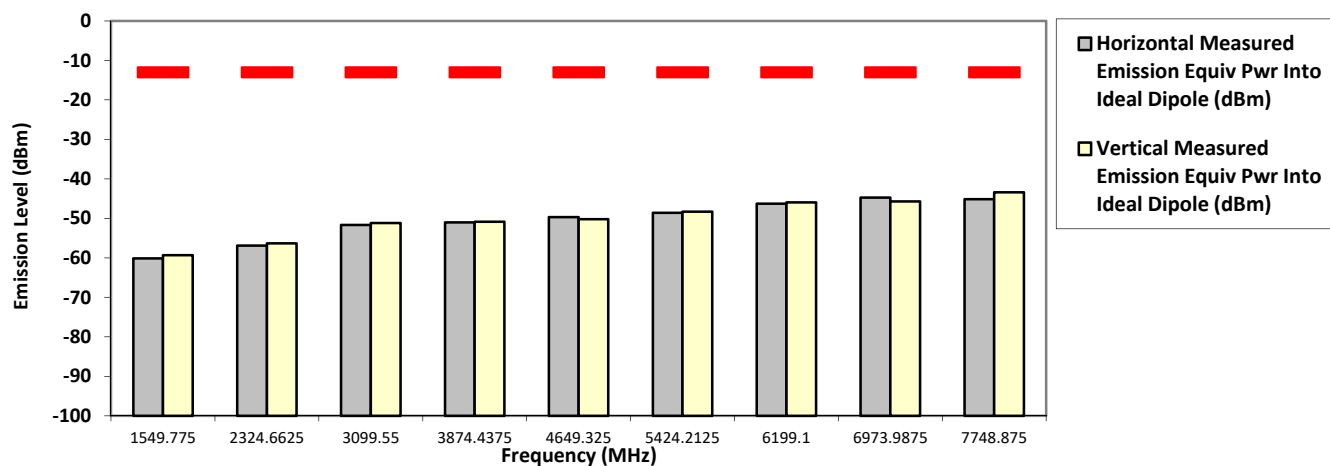

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


794.012500 MHz (Not for FCC review)

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-58.8471 **	-59.6040 **
2382.0375	-13.0000	-55.3453 **	-55.4622 **
3176.0500	-13.0000	-51.8178 **	-50.7643 **
3970.0625	-13.0000	-50.8014 **	-51.3916 **
4764.0750	-13.0000	-49.4721 **	-49.1327 **
5558.0875	-13.0000	-47.1126 **	-47.7317 **
6352.1000	-13.0000	-46.1997 **	-47.9950 **
7146.1125	-13.0000	-44.0235 **	-44.2902 **
7940.1250	-13.0000	-44.4005 **	-43.4424 **

RADIATED SPURIOUS EMISSIONS

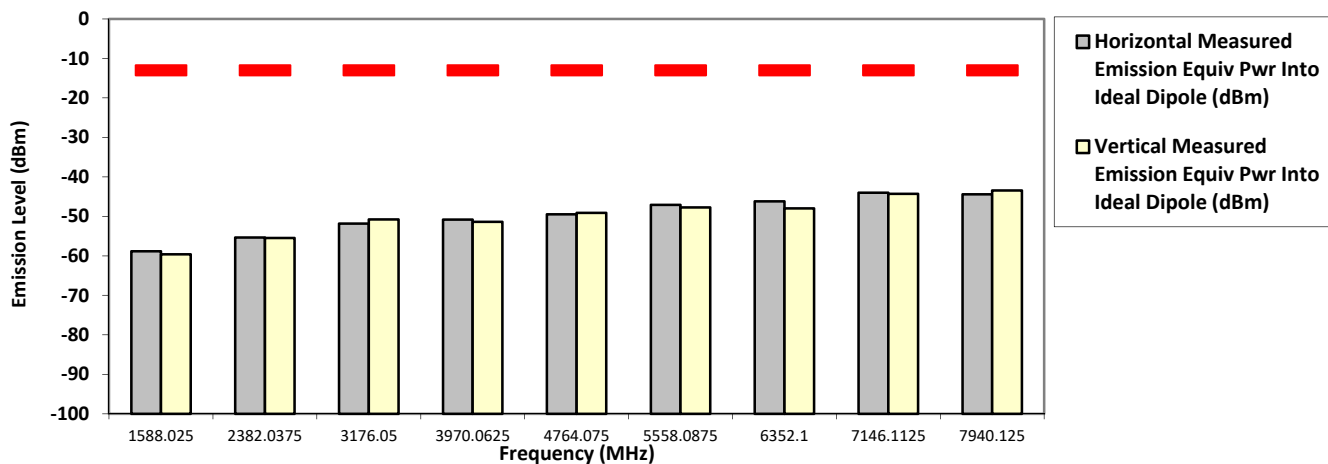

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.


*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: M37TSS9PW1AN S/N: 681TXT7177 SR:03466-EMC-00198
Battery Part No: NA Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C
Test Mode: TX APCO Digital Phase II
794.012500 MHz (Not for FCC review) 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1588.0250	-13.0000	-59.3172 **	-59.6115 **
2382.0375	-13.0000	-54.7822 **	-56.1584 **
3176.0500	-13.0000	-51.4330 **	-51.0554 **
3970.0625	-13.0000	-50.2442 **	-51.0994 **
4764.0750	-13.0000	-49.5030 **	-48.6212 **
5558.0875	-13.0000	-47.8896 **	-47.2431 **
6352.1000	-13.0000	-48.0893 **	-46.4392 **
7146.1125	-13.0000	-45.1590 **	-42.7627 **
7940.1250	-13.0000	-42.8673 **	-43.1697 **

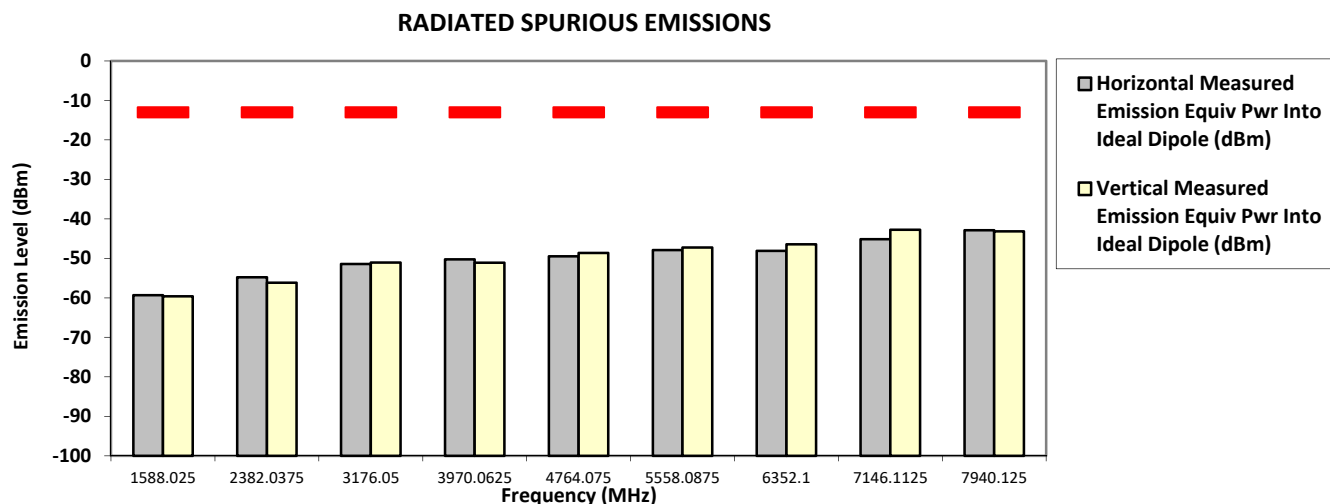

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


799.087500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-59.3387 **	-60.8565 **
2397.2625	-13.0000	-55.1059 **	-55.2753 **
3196.3500	-13.0000	-51.2359 **	-52.1717 **
3995.4375	-13.0000	-51.7329 **	-51.4622 **
4794.5250	-13.0000	-48.8724 **	-49.5693 **
5593.6125	-13.0000	-48.0152 **	-47.3052 **
6392.7000	-13.0000	-46.6958 **	-46.6081 **
7191.7875	-13.0000	-42.7949 **	-43.4833 **
7990.8750	-13.0000	-43.1504 **	-43.1973 **

RADIATED SPURIOUS EMISSIONS

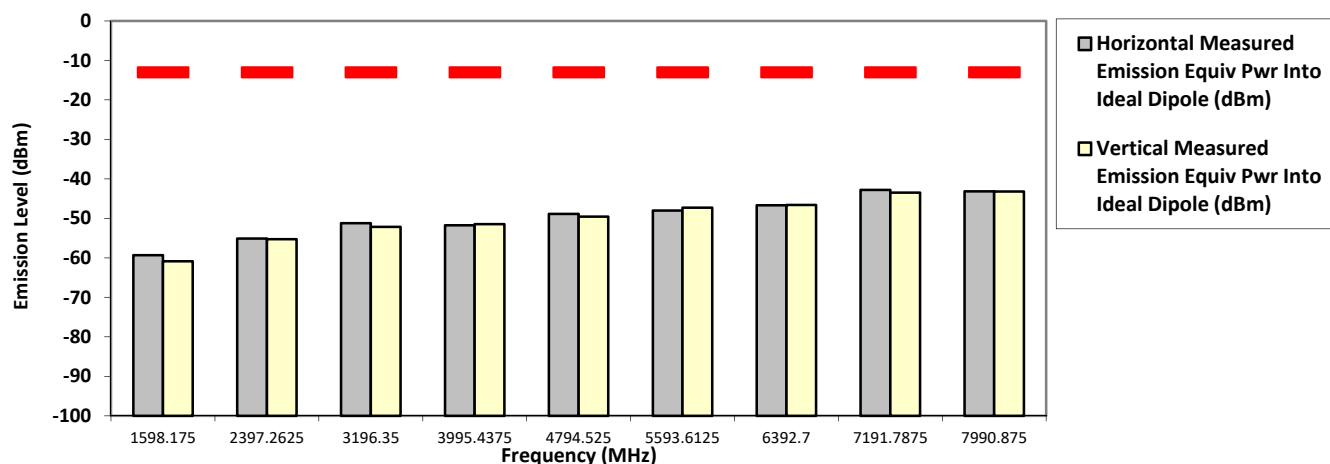

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


799.087500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.3927 **	-59.8255 **
2397.2625	-13.0000	-55.4285 **	-56.3780 **
3196.3500	-13.0000	-49.6193 **	-50.3772 **
3995.4375	-13.0000	-50.5858 **	-50.7069 **
4794.5250	-13.0000	-48.9191 **	-49.9633 **
5593.6125	-13.0000	-49.3237 **	-48.4939 **
6392.7000	-13.0000	-45.5909 **	-46.3230 **
7191.7875	-13.0000	-45.2085 **	-43.8055 **
7990.8750	-13.0000	-42.8057 **	-42.3201 **

RADIATED SPURIOUS EMISSIONS

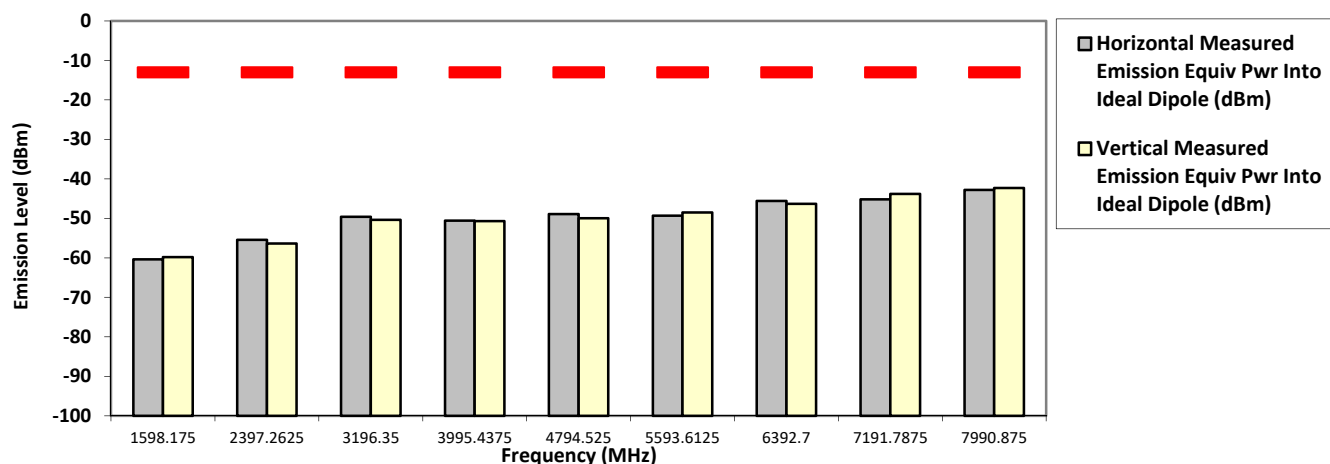

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TSS9PW1AN **S/N:** G0P0UX0X3C **SR:**03466-EMC-00243
Battery Part No: NA **Accy Part No:** HMN4079G-CF2, HSN4031B-C1, HKN4192B-C6, HKN6164B-C1,
HKN6188B-C2, 13921-HKN6172C-1, PMHN4194C-C20, PMUN1057B-C9, AS000016A02
Test Mode: TX APCO Digital Phase II


804.912500 MHz

12.5 kHz

36.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1440.1800	-13.0000	-55.5200 *	-55.9500 *
1456.5800	-13.0000	-53.5400 *	-55.0900 *
1609.8250	-13.0000	-61.8432 **	-61.5501 **
2414.7375	-13.0000	-57.6007 **	-56.2515 **
3219.6500	-13.0000	-53.6638 **	-53.6366 **
4024.5625	-13.0000	-51.1968 **	-52.1871 **
4829.4750	-13.0000	-50.0507 **	-48.8817 **
5634.3875	-13.0000	-47.7897 **	-49.0111 **
6439.3000	-13.0000	-47.2812 **	-47.6538 **
7198.6900	-13.0000	-37.8000 *	-39.6900 *
7244.2125	-13.0000	-44.6763 **	-43.6885 **
8049.1250	-13.0000	-44.6390 **	-43.6595 **

RADIATED SPURIOUS EMISSIONS

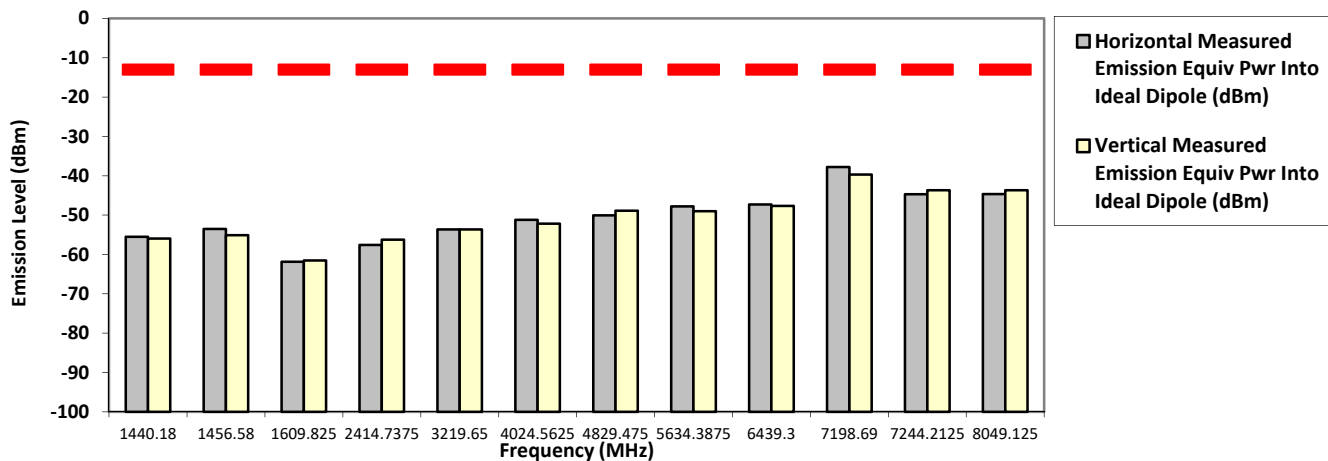

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Faris Sun, 20 Feb, 2022

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.3 Hum(%RH): 69.3

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M37TSS9PW1AN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 681TXT7177

SR:03466-EMC-00198

Accy Part No: AN000163A01, HMN4079G-C4, HKN6163C-C6, PMHN4194C

Test Mode: TX APCO Digital Phase II


804.912500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-59.7847 **	-60.2350 **
2414.7375	-13.0000	-54.3149 **	-54.6959 **
3219.6500	-13.0000	-51.9901 **	-50.3347 **
4024.5625	-13.0000	-51.0481 **	-50.9586 **
4829.4750	-13.0000	-49.2772 **	-49.0710 **
5634.3875	-13.0000	-48.2965 **	-47.5646 **
6439.3000	-13.0000	-46.2828 **	-45.5548 **
7244.2125	-13.0000	-43.4996 **	-42.8589 **
8049.1250	-13.0000	-44.7112 **	-42.9074 **

RADIATED SPURIOUS EMISSIONS

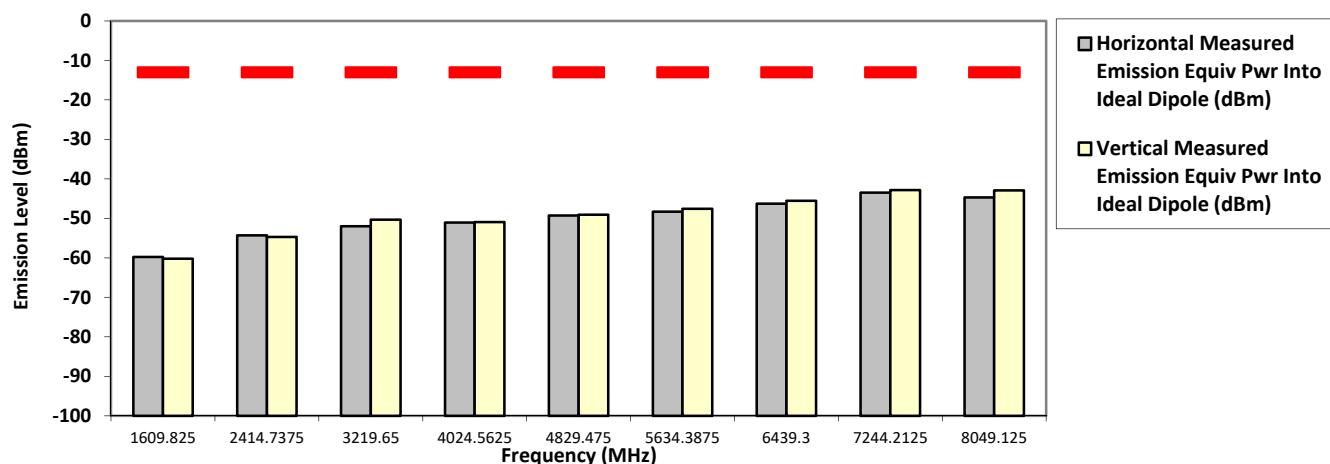

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Qawiman&Nazrin

Sun, 12 Dec, 2021

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 24.1 Hum(%RH): 69.8

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP)

6.12.1. Test Setup

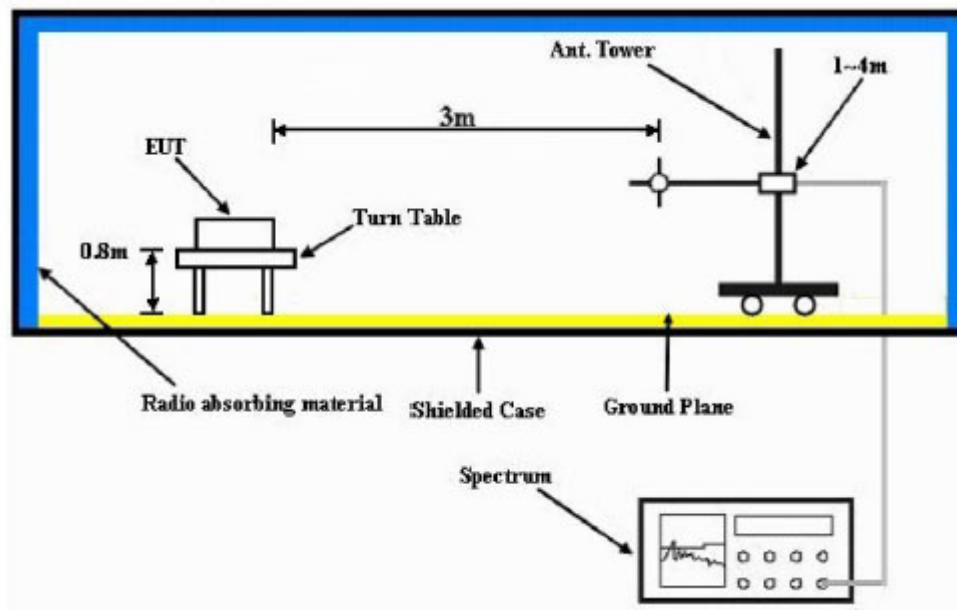

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

6.12.2. Test Result

Itinerant channel: 769.0125MHz, 799.0125MHz

Part 90R Itinerant calculation				
	Watts	dB	dBm	VSWR
Output power of radio	2.0		33.0	
Nominal VSWR at input of antenna connector				1.5
Mismatch loss at the input of antenna connector due to VSWR		0.2		
Output Power after mismatch			32.8	
Loss of the cable, connector and mount		2.8		
Input power to the antenna feed	1.0		30.0	
ERP with 3dBd Gain antenna (HAF4014A)	2.0		33.0	

6.12.1. Test Limit

The maximum output power of the transmitter for mobile stations for itinerant channel is 2 watts. Power is given in terms of effective radiated power (ERP)

Part 90 EIRP/ERP Calculation

Tested Channels: 769.0875MHz, 804.9125MHz:


	Watts	dB	dBm	VSWR
Output power of radio	36.0		45.6	
Nominal VSWR at input of antenna connector				1.5
Mismatch loss at the input of antenna connector due to VSWR		0.2		
Output power after mismatch			45.4	
Loss of the cable, connector and mount		2.8		
Input power to the antenna feed	18.1		42.6	
ERP with 3dBd Gain antenna (HAF4014A)	36.2		45.6	

6.12.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts. Power is given in terms of effective radiated power (ERP).

6.13. GNSS (EIRP for 1559 - 1610MHz)

6.13.1. Test Setup

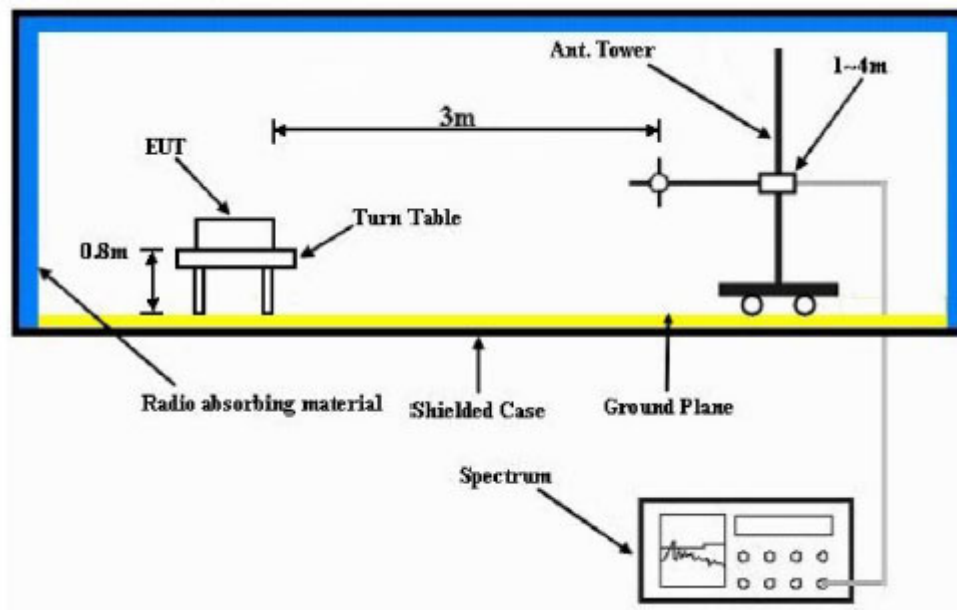

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.13.1. Test Result

EIRP in RNSS band (1.559GHz to 1.610GHz)

S/N: 681TXT7177

Tx Power: 35.5 Watts

Channel Spacing: 12.5kHz

Modulation: FM

Accessory: HAF4014A, AN000163A01, HMN4079G-C4, HKN6163C-C6, Control Head 07
PMHN4194C

Battery: NA

Frequency Channel: 799.0875 MHz

Antenna Polarization	2Fc (MHz)	EIRP (dBm)	Limit (dBm)
Horizontal	1598.1750	-49.70	-40
Vertical	1598.1750	-47.54	-40

Frequency Channel: 804.9125 MHz

Antenna Polarization	2Fc (MHz)	EIRP (dBm)	Limit (dBm)
Horizontal	1609.8250	-50.47	-40
Vertical	1609.8250	-48.33	-40

6.13.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~