

# APPROVAL SHEET

Customer Name: VeriFone

Date: Feb. 12 2025

|              |                                   |
|--------------|-----------------------------------|
| Verifone P/N |                                   |
| DCT P/N      | F-2A-XZ-0381-000-K0               |
| Description  | ANTENNA, Portable ( SP7392A ) WCN |
| Version      | DVT1                              |

| Prepared by     | Signed by    | Approved by<br>Customer |
|-----------------|--------------|-------------------------|
| RF Engineer     | Tao Bi       |                         |
| ME Engineer     | ZheQiang Guo |                         |
| Reviewed by     | Signed by    |                         |
| RF Manager      | JianHua Wu   |                         |
| ME Manager      | GuoFu Cheng  |                         |
| Project Manager | Biao Xia     |                         |

|                                                     |                   |                                                                |
|-----------------------------------------------------|-------------------|----------------------------------------------------------------|
| Project:Portable (SP7392A)                          | Author:Tao Bi     | File Name:<br>Portable (SP7392A) WCN Antenna<br>Approval sheet |
| Date: Feb.8.2025                                    |                   |                                                                |
| Language: English                                   | Check: JianHua Wu |                                                                |
| Document No.:                                       |                   |                                                                |
| Zhejiang Haitong Communication Electronics Co., Ltd |                   |                                                                |

1 Antenna Description

|                                                            |
|------------------------------------------------------------|
| WCN Antenna Structure                                      |
| 1. FPC with SPRING ; Fixed Internal Antenna (PIFA antenna) |

1.1 Matching Circuit

| WCN天線匹配 | 原始貼片    | 更改  | SAR SENSOR | 原始貼片       | 更改  |
|---------|---------|-----|------------|------------|-----|
| L3504   | 10nH    |     | L3503      | 22NH（可更改）  | 0hm |
| R3505   | 3PF     | 0hm | L3513      | 100nH（可更改） |     |
| C3528   | NA      |     | R3504      | 33PF 勿动    |     |
| R3510   | 0 0hm   |     | L3502      | 100nH 勿动   |     |
| C3553   | NA      |     | R3506      | 18PF 勿动    |     |
| R3511   | 33PF 勿动 |     |            |            |     |
| C3524   | 33PF 勿动 |     |            |            |     |
|         |         |     |            |            |     |
|         |         |     |            |            |     |
|         |         |     |            |            |     |

1.2 Calibration certificate and darkroom

|                                                                                                            |
|------------------------------------------------------------------------------------------------------------|
| calibration certificate                                                                                    |
| Instrunent number: 551182950                                                                               |
| Calibration Unit: 1/F, Building C5, Kangqiao Business Park, No.2555 Xiu Pu Road, Pudong New Area, Shanghai |
| Calibration date: Nov 17, 2024                                                                             |
| Next calibration date: Nov 16, 2025                                                                        |
| Calibrator: Yao Bo                                                                                         |

2 Product Specification

2.1 S11 (Return Loss)

The S11 over the frequencies stated in Table 1 below shall be measured at the connector end of the cable for each antenna assembly. The S11 are measured with the antennas installed on platform. The S11 shall be 100% tested in production.

|                |                    |                      |
|----------------|--------------------|----------------------|
| Test Parameter | 698 MHz to 960 MHz | 1710 MHz to 2690 MHz |
|----------------|--------------------|----------------------|

|      |          |          |
|------|----------|----------|
| S11: | -5dB Max | -5dB Max |
|------|----------|----------|

## 2.2 Test environment

The radiation pattern and antenna gain shall be tested either with a conventional far field anechoic chamber or a near field anechoic chamber such as a Satimo SG24-L.

For a far field anechoic chamber, the gain measurements shall be made within an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test (AUT). The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure at a sufficient height to be in the ‘quiet zone’ of the chamber. All test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer’s minimum calibration requirements.

For a near field anechoic chamber, the AUT test must be place in the center (and within the admissible offset) of the probe array elements. The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure.

## 2.3 Antenna radiation measurement


In order to ensure compliance with network carrier specifications, it is required to measure a 3-D gain measurement for WCN Antenna.

Table below specifies the details of the 3-D gain measurement points

|                      |                    |
|----------------------|--------------------|
| Theta Start: 0°      | Phi Start: 0°      |
| Theta Stop: 150°     | Phi Stop: 330°     |
| Theta increment: 30° | Phi Increment: 30° |

The table above specifies the minimum 23 measurement points (x2 polarizations) for each measurement frequency.


The axis and AUT orientation for gain measurements are outlined in below Figures.

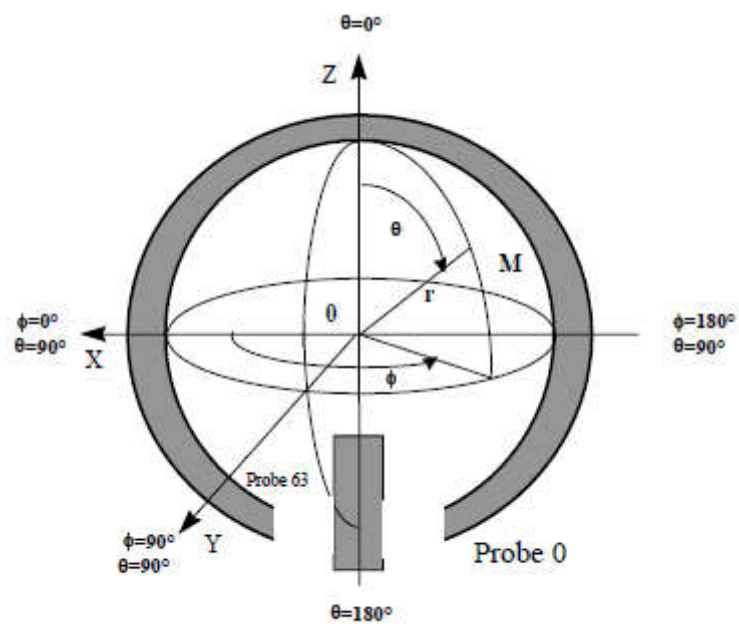

The probe 0 is near the door of the chamber.

### 3 Antenna Performance Test

#### 3.1 S11 of WCN Antenna

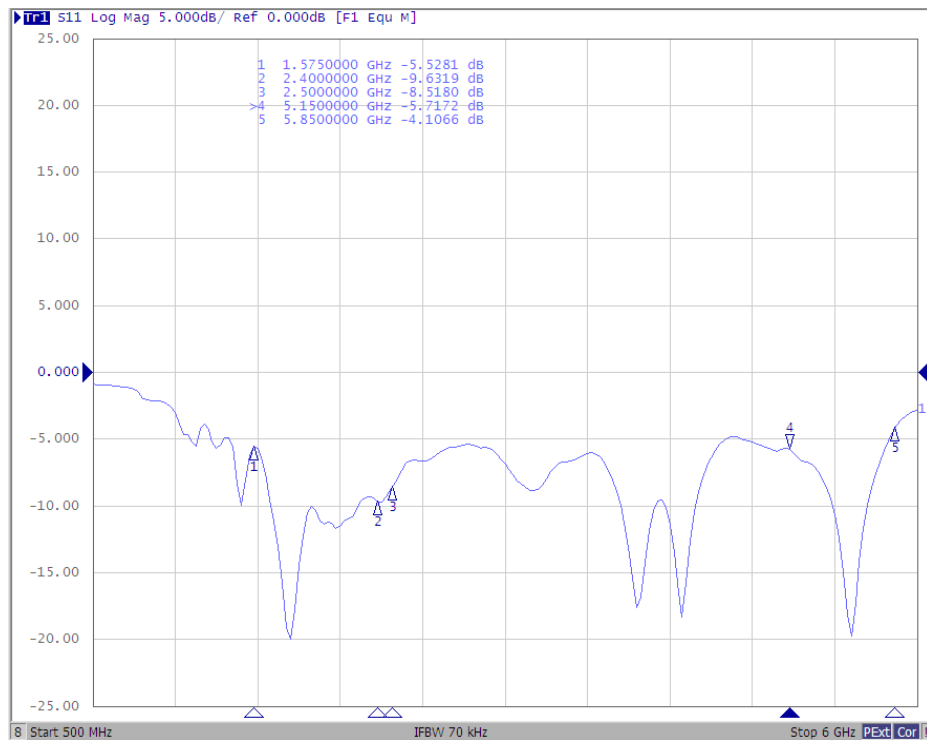


#### 3.2 Antenna Radiated Efficiency

| Frequency(MHZ) | Efficiency | Efficiency(dB) | Peak Gain | Frequency(MHZ) | Efficiency | Efficiency(dB) | Peak Gain | Frequency(MHZ) | Efficiency | Efficiency(dB) | Peak Gain |
|----------------|------------|----------------|-----------|----------------|------------|----------------|-----------|----------------|------------|----------------|-----------|
| 1560           | 32%        | -5             | 1.1       | 2400           | 39         | -4             | 0         | 5150           | 39         | -4.1           | 1.01      |
| 1565           | 33%        | -4.9           | 1.4       | 2410           | 38         | -4.2           | 0.1       | 5200           | 39         | -4.1           | 1.03      |
| 1570           | 34%        | -4.7           | 1.5       | 2420           | 38         | -4.2           | 0         | 5250           | 40         | -3.9           | 1.2       |
| 1575           | 34%        | -4.7           | 1.4       | 2430           | 39         | -4.1           | 0.4       | 5300           | 42         | -3.7           | 1.21      |
| 1580           | 35%        | -4.6           | 1         | 2440           | 41         | -3.9           | 0.4       | 5350           | 39         | -4.1           | 1.18      |
| 1585           | 36%        | -4.4           | 0.3       | 2450           | 42         | -3.7           | 1.1       | 5400           | 41         | -3.8           | 1.2       |
| 1590           | 37%        | -4.3           | 0.1       | 2460           | 43         | -3.7           | 1.1       | 5450           | 43         | -3.7           | 1.12      |
| 1595           | 38%        | -4.3           | -0.1      | 2470           | 42         | -3.7           | 1.1       | 5500           | 45         | -3.4           | 1.13      |
| 1600           | 38%        | -4.2           | -0.3      | 2480           | 42         | -3.8           | 1.1       | 5550           | 46         | -3.4           | 1.16      |
| 1605           | 38%        | -4.2           | -1.1      | 2490           | 40         | -4             | 1.2       | 5600           | 46         | -3.4           | 1.17      |
| 1610           | 38%        | -4.2           | -0.4      | 2500           | 39         | -4.1           | 1.2       | 5650           | 43         | -3.6           | 1.13      |
| 平均值            | 36%        | -4.5           | 0.4       | 平均值            | 40         | -4             | 0.7       | 5700           | 38         | -4.2           | 1.07      |
|                |            |                |           |                |            |                |           | 5750           | 36         | -4.4           | 1.05      |
|                |            |                |           |                |            |                |           | 5800           | 33         | -4.8           | 0.92      |
|                |            |                |           |                |            |                |           | 5850           | 31         | -5.1           | 0.94      |
|                |            |                |           |                |            |                |           | 平均值            | 40         | -4             | 1.1       |

### 3.3 Radiation Pattern

WCN antenna: 2400MHz

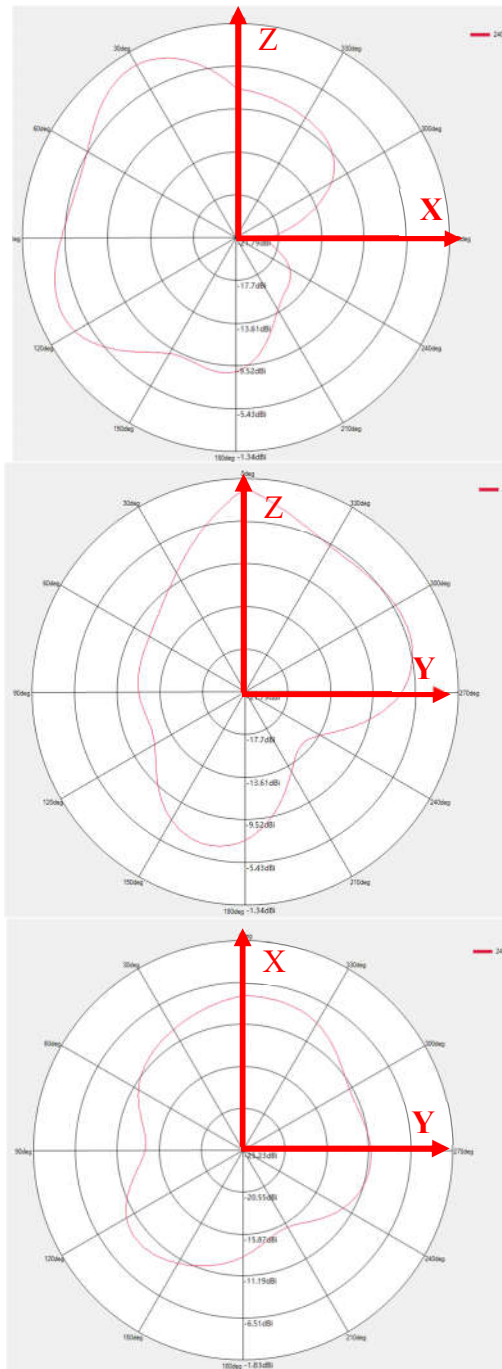


| 2400MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | -1.34 | 210 deg |
| Phi=90deg Peak (dBi)  | -0.10 | 150 deg |
| Theta=90deg Peak(dBi) | -1.83 | 240 deg |

WCN antenna: 2480MHz





| 2480MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | 1.1   | 210 deg |
| Phi=90deg Peak (dBi)  | 0.22  | 150 deg |
| Theta=90deg Peak(dBi) | -0.53 | 240 deg |

WCN antenna: 2500MHz

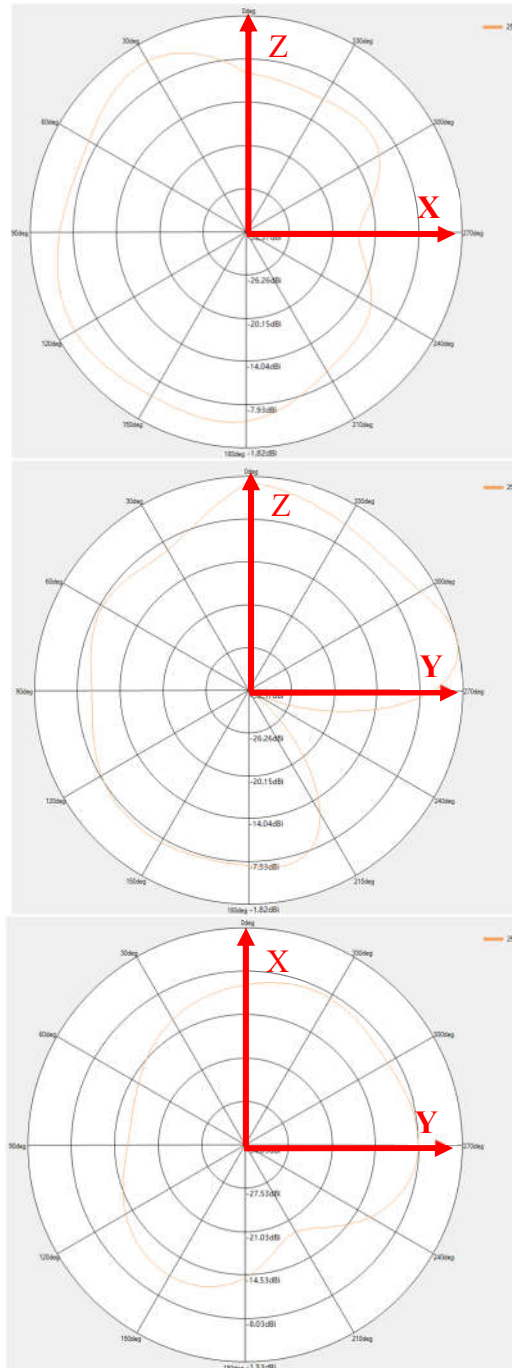


| 2500MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | 1.2   | 210 deg |
| Phi=90deg Peak (dBi)  | 0.27  | 150 deg |
| Theta=90deg Peak(dBi) | -0.45 | 240 deg |

WCN antenna: 5150MHz

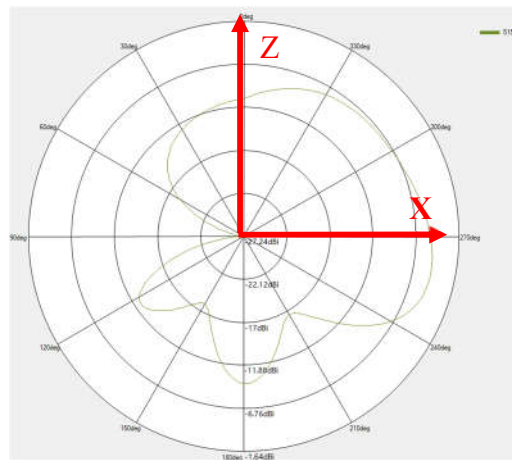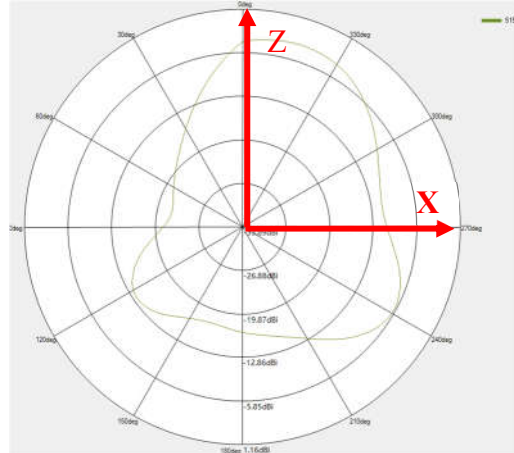




| 5150MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | 1.01  | 210 deg |
| Phi=90deg Peak (dBi)  | 0.28  | 120 deg |
| Theta=90deg Peak(dBi) | -0.93 | 90 deg  |

WCN antenna: 5350MHz

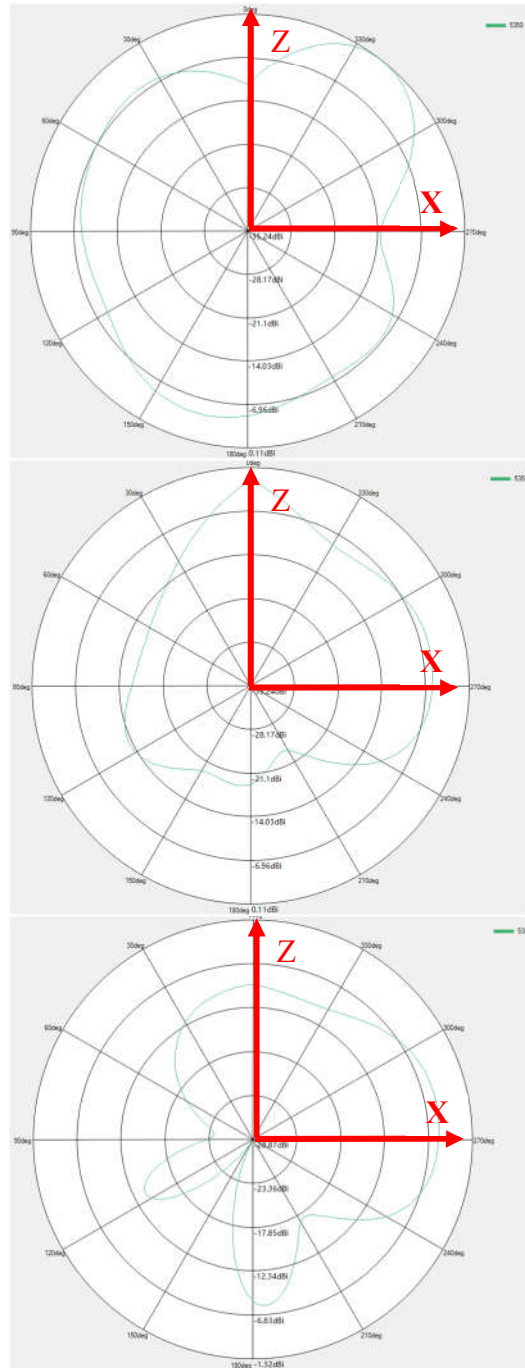



| 5350MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | 0.07  | 120 deg |
| Phi=90deg Peak (dBi)  | 1.12  | 330 deg |
| Theta=90deg Peak(dBi) | -0.01 | 0 deg   |

WCN antenna: 5600MHz

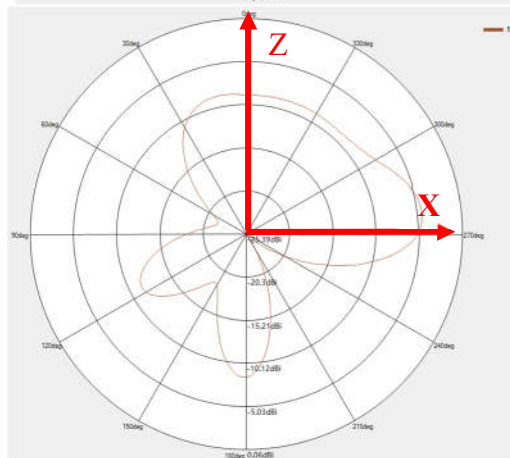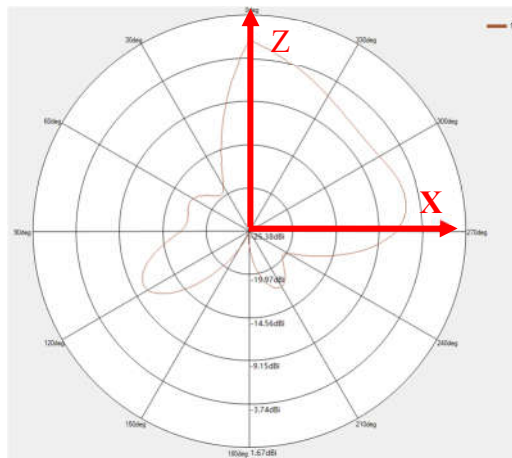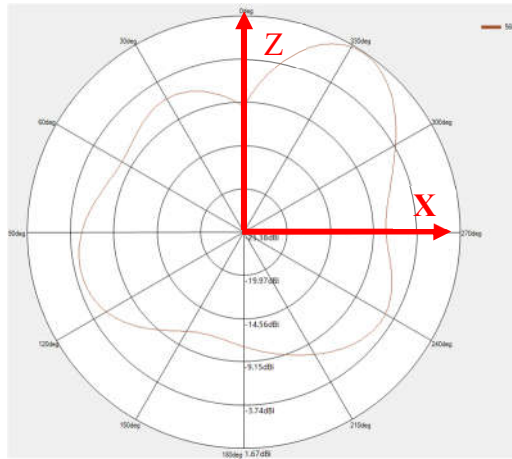


| 5600MHz               |       |         |
|-----------------------|-------|---------|
| Phi=0deg Peak (dBi)   | -0.47 | 120 deg |
| Phi=90deg Peak (dBi)  | -0.69 | 60 deg  |
| Theta=90deg Peak(dBi) | 1.17  | 60 deg  |

WCN antenna: 5850MHz

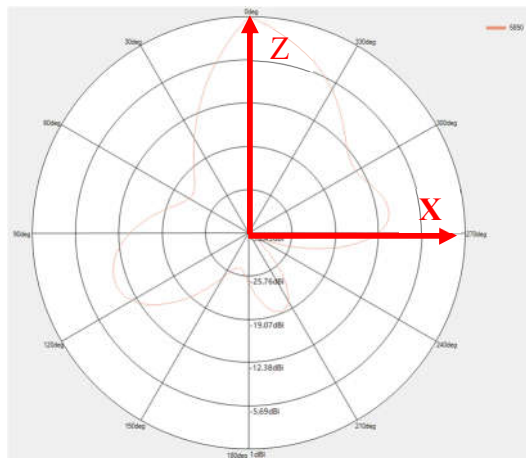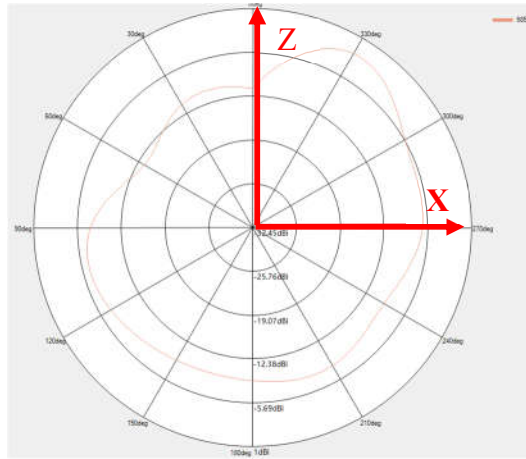

| 5850MHz               |       |        |
|-----------------------|-------|--------|
| Phi=0deg Peak (dBi)   | -0.33 | 90 deg |
| Phi=90deg Peak (dBi)  | -0.41 | 90 deg |
| Theta=90deg Peak(dBi) | 0.94  | 90 deg |

WCN antenna: 1575MHz

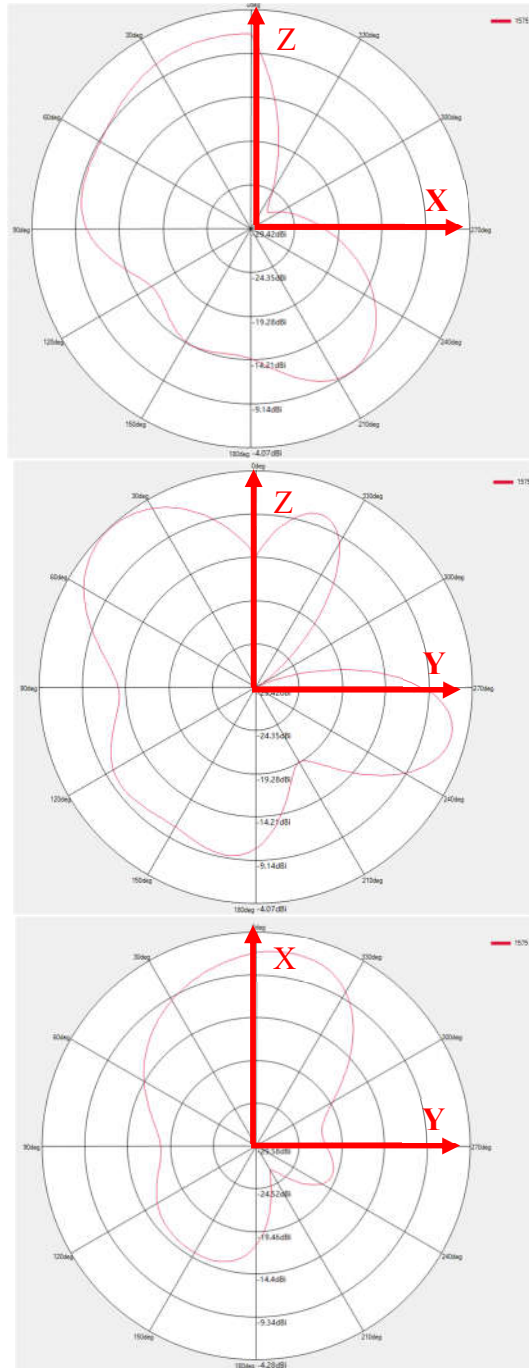

| 1575MHz               |       |        |
|-----------------------|-------|--------|
| Phi=0deg Peak (dBi)   | 1.35  | 0 deg  |
| Phi=90deg Peak (dBi)  | 0.53  | 90 deg |
| Theta=90deg Peak(dBi) | -0.92 | 60 deg |

## 1.2 NFC Antenna

NFC Frequency Band : 13.553 - 13.567 MHz

Modulation Type : ASK

Supported Card Type : A / B

NFC Antenna Type : Loop Antenna

NFC Antenna size : 75.40\*66.35\*1.5mm

NFC Antenna location : at the back of device screen