

APPLICANT:  
Ericsson Radio System AB

EXHIBIT 6  
Page 6.01

FCC ID NO.  
B5KKRC12104-41

## EXHIBIT 6 - COVER SHEET

---

### Table of Contents

|                                   |      |
|-----------------------------------|------|
| EXHIBIT 6 - COVER SHEET           | 6.01 |
| EXHIBIT 6 - COVER SHEET CONTINUED | 6.02 |
| EXHIBIT 6 - COVER SHEET CONTINUED | 6.03 |
| RF POWER OUTPUT                   |      |
| Method and Equipment              | 6.04 |
| Analog Mode                       |      |
| High Power Channel 384            | 6.05 |
| High Power Channel 799            | 6.06 |
| High Power Channel 991            | 6.07 |
| Digital Mode                      |      |
| High Power Channel 384            | 6.08 |
| High Power Channel 799            | 6.09 |
| High Power Channel 991            | 6.10 |
| MODULATION CHARACTERISTICS        |      |
| Analog Mode                       |      |
| SAT                               | 6.11 |
| Wideband Data                     | 6.12 |
| Audio Modulating Circuit          |      |
| Compressor Disabled               | 6.13 |
| Compressor Enabled                | 6.14 |
| Modulation Limiting               |      |
| Method and Equipment              | 6.15 |
| SAT Off                           | 6.16 |
| Frequency Response Audio Low      |      |
| Pass Filtering                    | 6.17 |
| Digital mode                      | 6.18 |
| Data Packet mode                  | 6.19 |

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

EXHIBIT 6 - COVER SHEET CONTINUED

---

Table of Contents

OCCUPIED BANDWIDTH

|                              |      |
|------------------------------|------|
| Method and Equipment         | 6.20 |
| Analog Mode                  |      |
| Continuous wave Span 100 kHz | 6.21 |
| Voice Modulation with SAT    |      |
| Span 100 kHz                 | 6.22 |
| Span 200 kHz                 | 6.23 |
| Wideband Data                |      |
| Span 100 kHz                 | 6.24 |
| Span 200 kHz                 | 6.25 |
| Digital Mode                 |      |
| Span 100 kHz                 | 6.26 |
| Span 200 kHz                 | 6.27 |
| Data Packet Mode             |      |
| Span 90 kHz                  | 6.28 |
| Span 180 kHz                 | 6.29 |

CONDUCTED SPURIOUS MISSIONS

|                           |      |
|---------------------------|------|
| Method and Equipment      | 6.30 |
| Analog mode               |      |
| Channel 991               | 6.31 |
| Channel 991 with bandpass | 6.32 |
| Channel 384               | 6.33 |
| Channel 384 with bandpass | 6.34 |
| Channel 799               | 6.35 |
| Channel 799 with bandpass | 6.36 |
| Digital mode              |      |
| Channel 991               | 6.37 |
| Channel 991 with bandpass | 6.38 |
| Channel 384               | 6.39 |
| Channel 384 with bandpass | 6.40 |
| Channel 799               | 6.41 |
| Channel 799 with bandpass | 6.42 |
| Data Packet mode          |      |
| Channel 991 with bandpass | 6.43 |
| Channel 384 with bandpass | 6.44 |
| Channel 799 with bandpass | 6.45 |

APPLICANT:  
Ericsson Radio System AB

EXHIBIT 6  
Page 6.03

FCC ID NO.  
B5KKRC12104-41

EXHIBIT 6 - COVER SHEET CONTINUED

---

Table of Contents

|                             |      |
|-----------------------------|------|
| RADIATED SPURIOUS EMISSIONS |      |
| Method and Equipment        | 6.46 |
| Analog mode MACRO           |      |
| Channel 991                 | 6.47 |
| Channel 799                 | 6.48 |
| Digital mode MACRO          |      |
| Channel 991                 | 6.49 |
| Channel 799                 | 6.50 |
| Analog mode CASSETTE        |      |
| Channel 991                 | 6.51 |
| Channel 799                 | 6.52 |
| Digital mode CASSETTE       |      |
| Channel 991                 | 6.53 |
| Channel 799                 | 6.54 |
| Data Packet mode MINIMDBS   |      |
| Channel 991                 | 6.55 |
| Channel 799                 | 6.56 |
| FREQUENCY STABILITY         |      |
| Method and Equipment        | 6.57 |
| MACRO with CRI              |      |
| Supply Voltage 27.20 V      | 6.58 |
| Supply Voltage 23.12 V      | 6.59 |
| Supply Voltage 31.28 V      | 6.60 |
| CASSETTE with CRI           |      |
| Supply Voltage 27.20 V      | 6.61 |
| Supply Voltage 23.12 V      | 6.62 |
| Supply Voltage 31.28 V      | 6.63 |
| Data Packet MINIMDBS        |      |
| Methode and Equipment       | 6.64 |
| Supply Voltage 115.0 V      | 6.65 |
| Supply Voltage 97.5 V       | 6.66 |
| Supply Voltage 132.3 V      | 6.67 |

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT ANALOG MODE

---

2.1046 (a) RF Power Output

The RF power output at the output terminal is plotted against supply voltage variation at the highest and lowest power levels.

The measurement was made per TIA/IS-136/IS-138 using the following Equipment.


Radio frequency 50 ohm load attached to the output. The power was measured on a BONT00N RF Peak power meter/analyzer.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT ANALOG MODE

2.1046 (a) RF Power Output

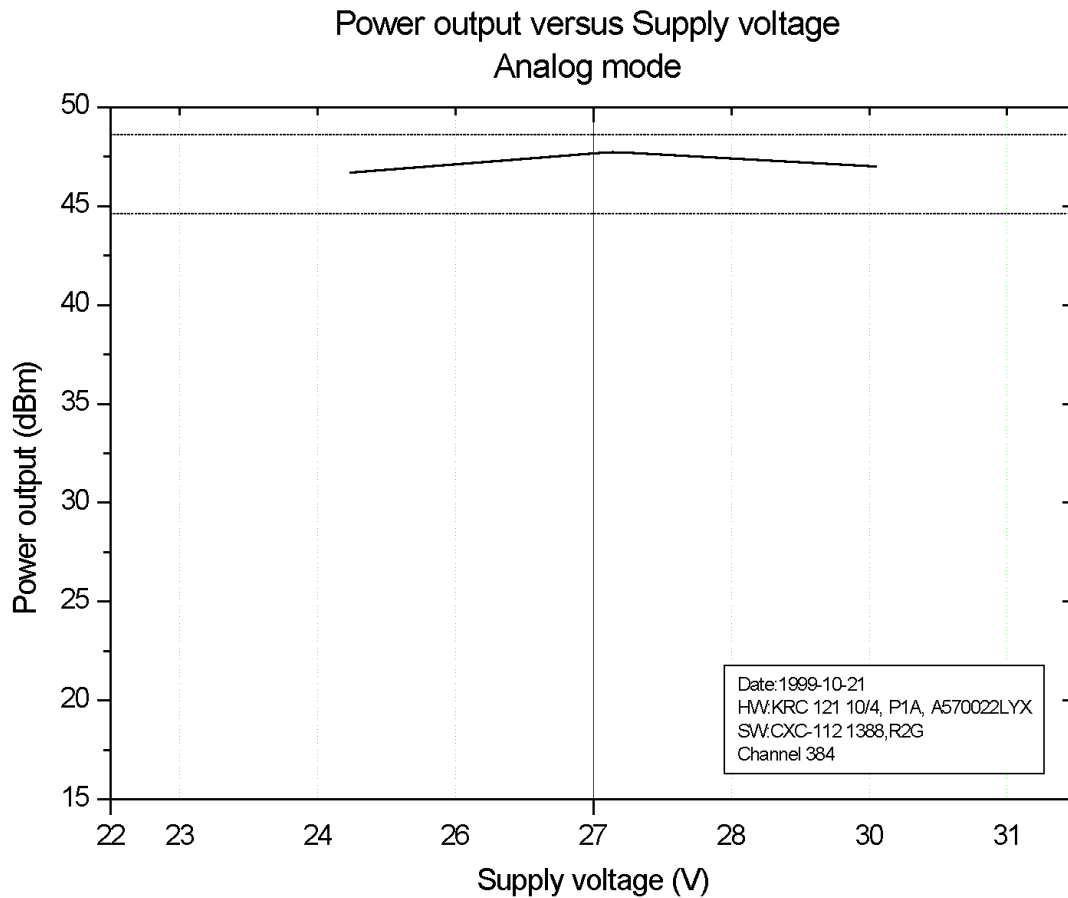


Channel 384      Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT ANALOG MODE

2.1046 (a) RF Power Output

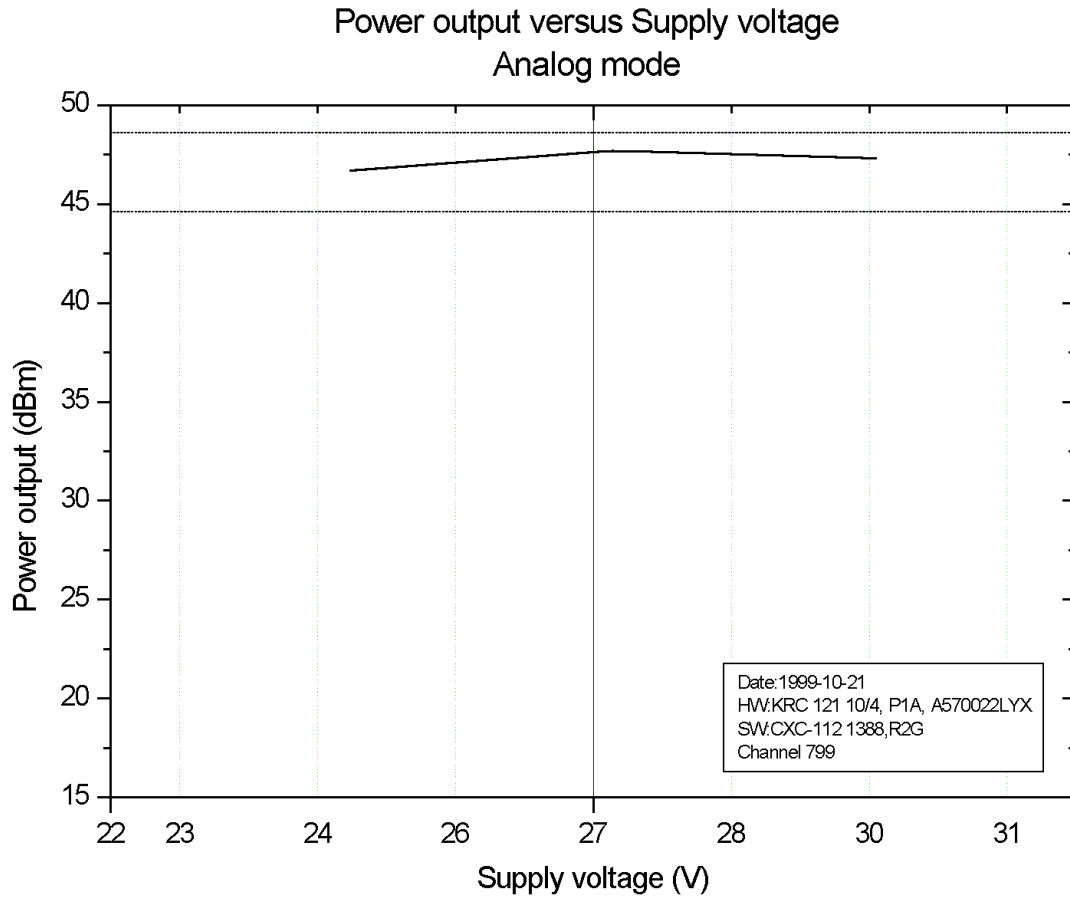


Channel 799      Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT ANALOG MODE

2.1046 (a) RF Power Output

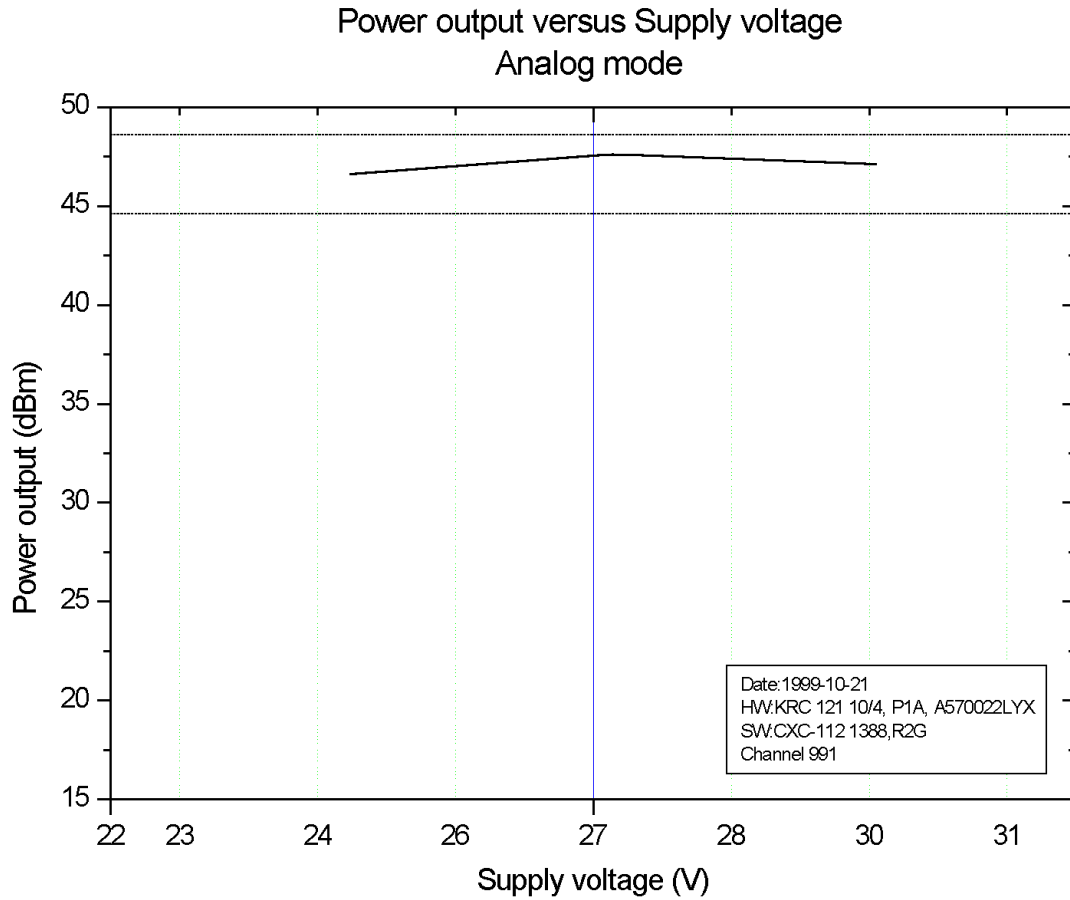


Channel 991      Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT DIGITAL MODE

2.1046 (a) RF Power Output

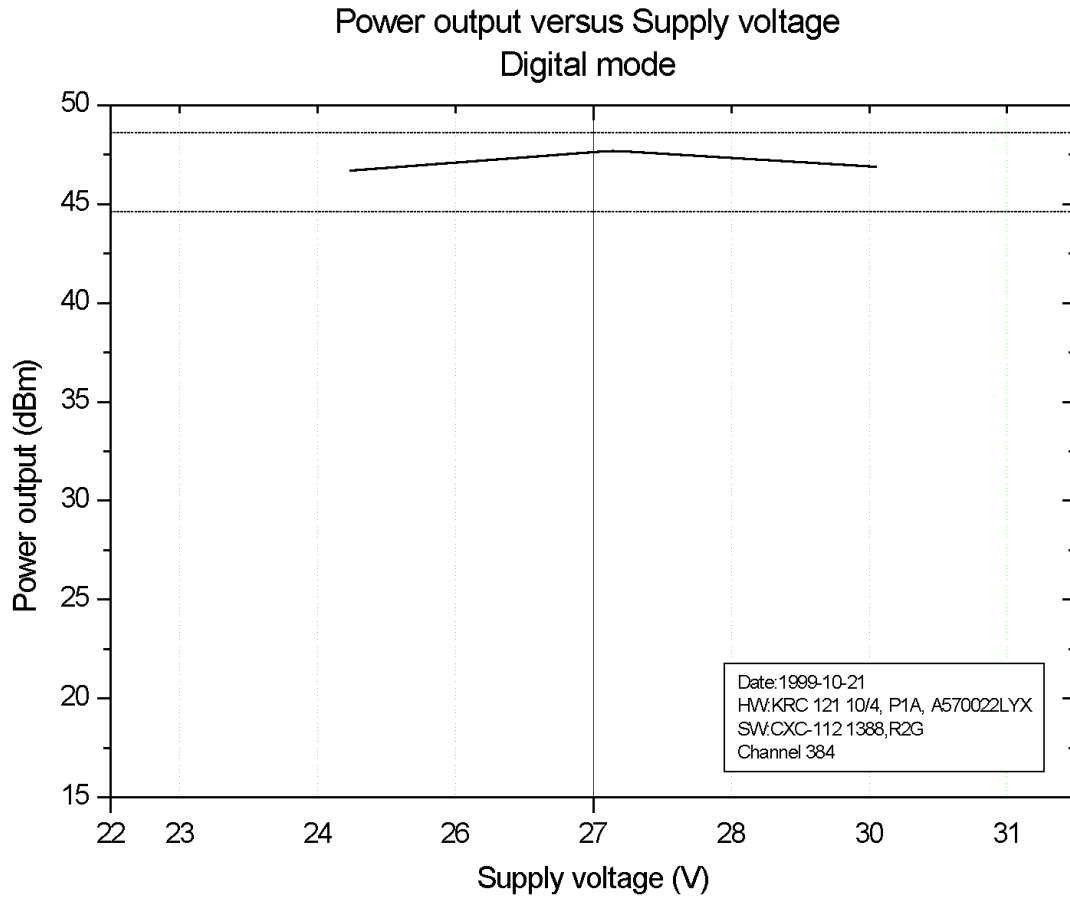


Channel 384 Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT DIGITAL MODE

2.1046 (a) RF Power Output

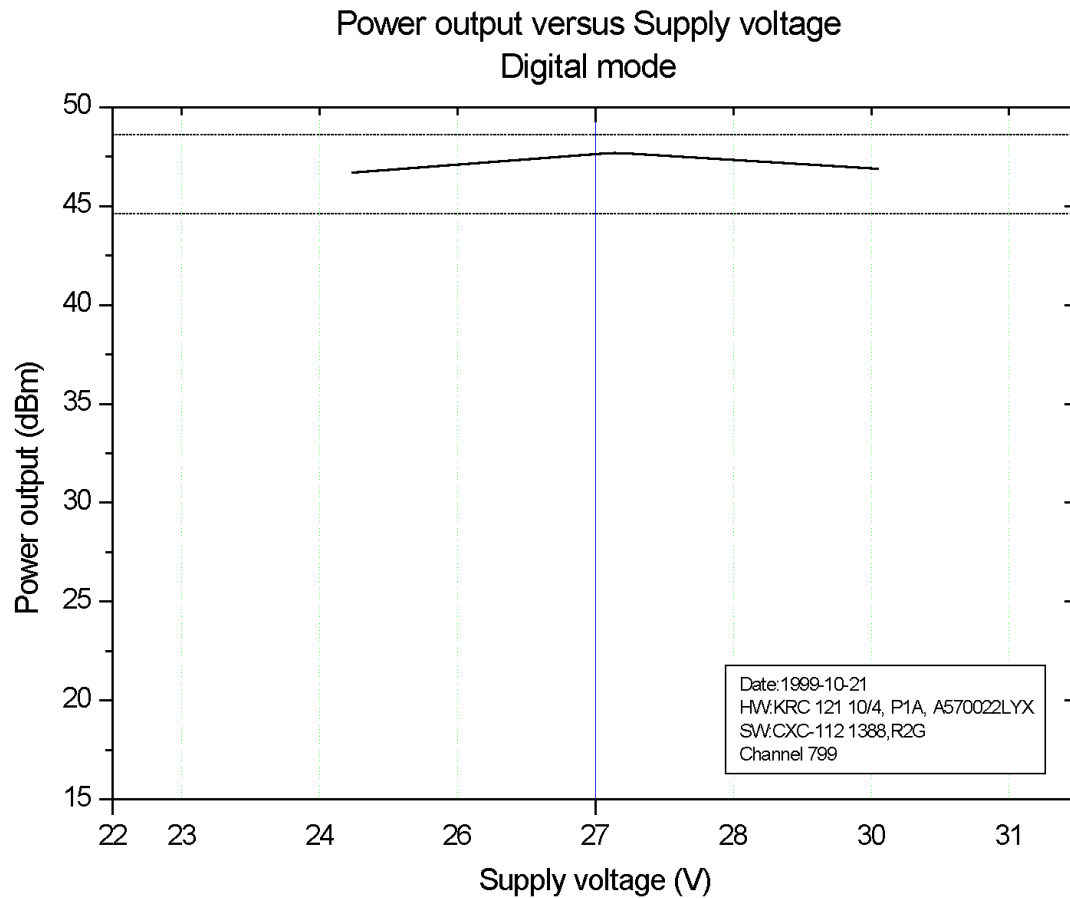


Channel 799      Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

RF POWER OUTPUT DIGITAL MODE

2.1046 (a) RF Power Output

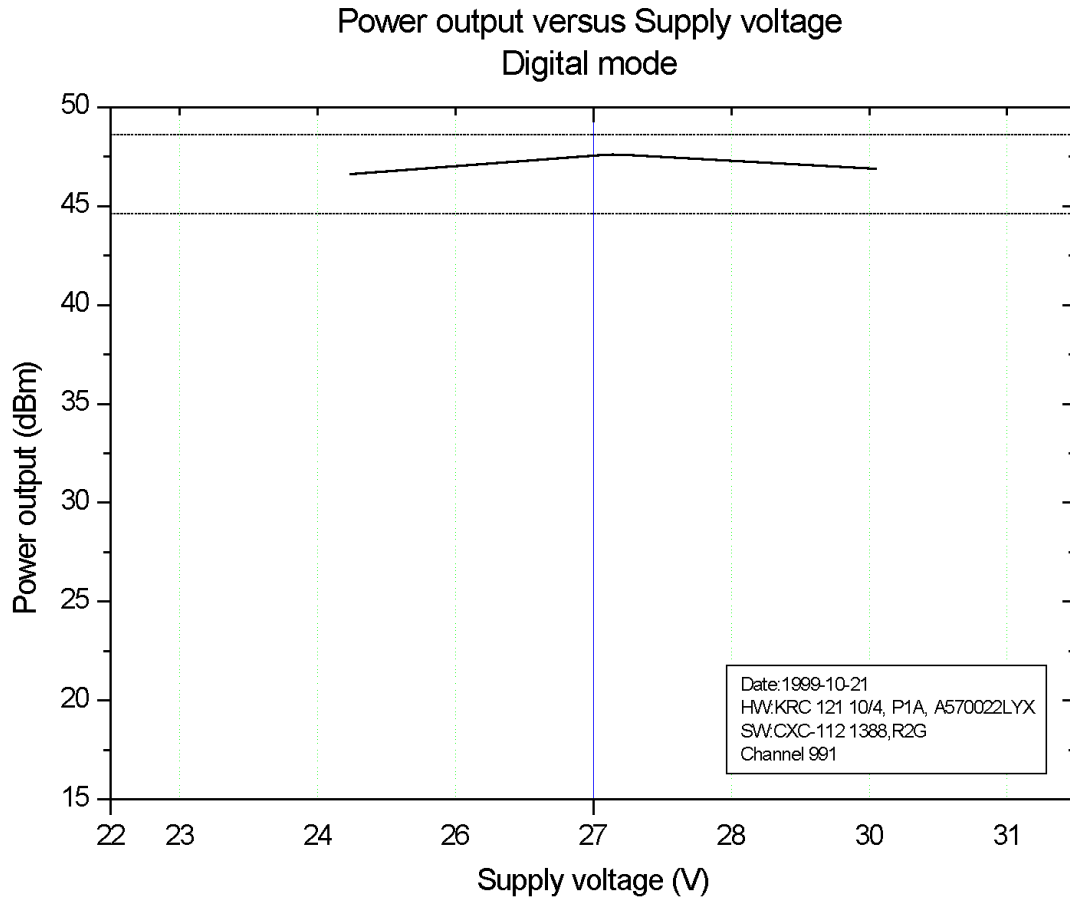

Channel 991 Output Power 47.6 dBm

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS ANALOG MODE

---

2.1047 (b) Modulation Characteristics SAT

| Chan. | Freq.<br>(MHz) | Output Power<br>(Watts) | Peak Deviation<br>(+/- kHz) |
|-------|----------------|-------------------------|-----------------------------|
| 384   | 881.52         | 57.0                    | 2.15/2.13                   |
| 799   | 893.97         | 57.0                    | 2.13/2.15                   |
| 991   | 869.04         | 57.0                    | 2.14/2.12                   |

The measurement was made per TIA/IS-136/  
IS-138 using the following Equipment.

The input signal source was R&S CMTA 54  
Radiocommunication analyzer.  
The input signal was fed through a custom  
made audio-PCM-converter named Claudio.  
Radio frequency load 50 ohm attached to the  
output.  
The peak deviation was measured on a Rohde &  
Schwarz CMTA 54, Radiocommunication analyzer.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS ANALOG MODE

---

2.1047 (b) Modulation Characteristics Wideband Data

| Chan. | Freq.<br>(MHz) | Output Power<br>(Watts) | Peak Deviation<br>(+/- kHz) |
|-------|----------------|-------------------------|-----------------------------|
| 384   | 881.52         | 57.0                    | 8.21/8.20                   |
| 799   | 893.97         | 57.0                    | 8.22/8.22                   |
| 991   | 869.04         | 57.0                    | 8.20/8.21                   |

The measurement was made per TIA/IS-136/  
IS-138 using the following Equipment.


The input signal source was R&S CMTA 54  
Radiocommunication analyzer.  
The input signal was fed through a custom  
made audio-PCM-converter named Claudio.  
Radio frequency load 50 ohm attached to the  
output.  
The peak deviation was measured on a Rohde &  
Schwarz CMTA 54, Radiocommunication analyzer.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

## MODULATION CHARACTERISTICS ANALOG MODE

### 2.1047 (a,b) Modulation Characteristics Audio Modulating Circuit

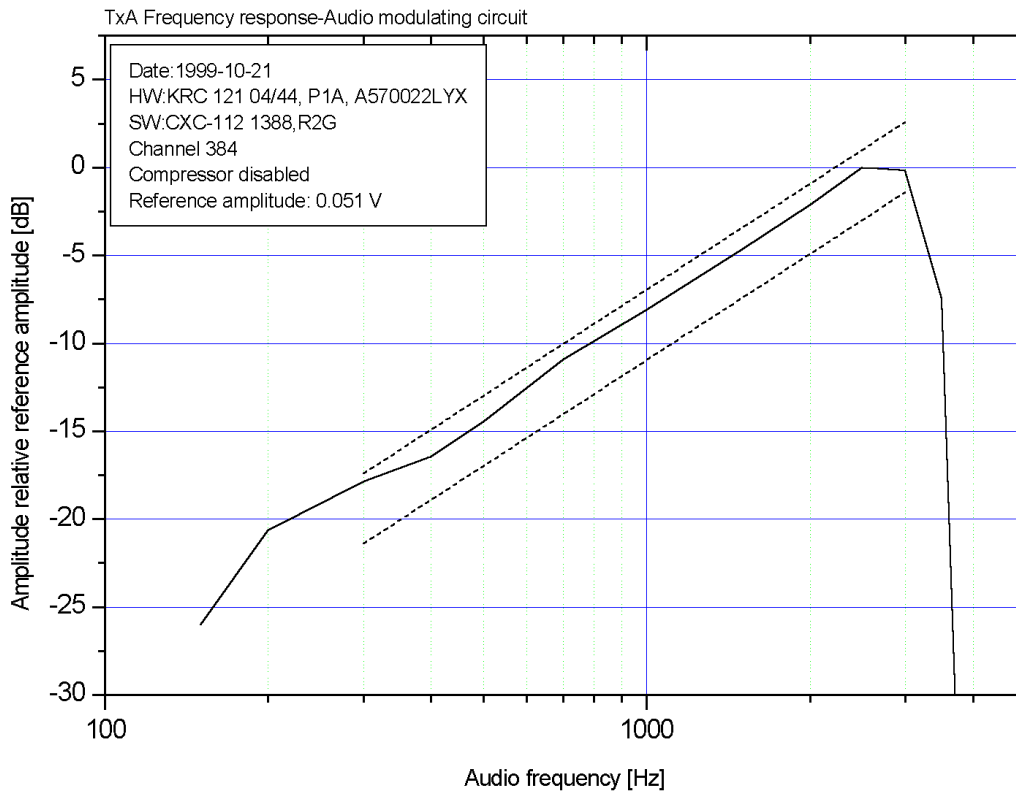

The measurement was made per TIA/IS-136/  
IS-138 using the following Equipment.

The input signal source was R&S CMTA 54  
Radiocommunication analyzer.  
The input signal was fed through a custom  
made audio-PCM-converter named Claudio.  
Radio frequency load 50 ohm attached to the  
output.  
The peak deviation was measured on a Rohde &  
Schwarz CMTA 54, Radiocommunication analyzer.


Note: In the RBS884 and RBS882 systems it is  
not possible for the TRX to operate without  
the compressor enabled.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

## MODULATION CHARACTERISTICS ANALOG MODE

### 2.1047 (a,b) Modulation Characteristics Audio Modulating Circuit

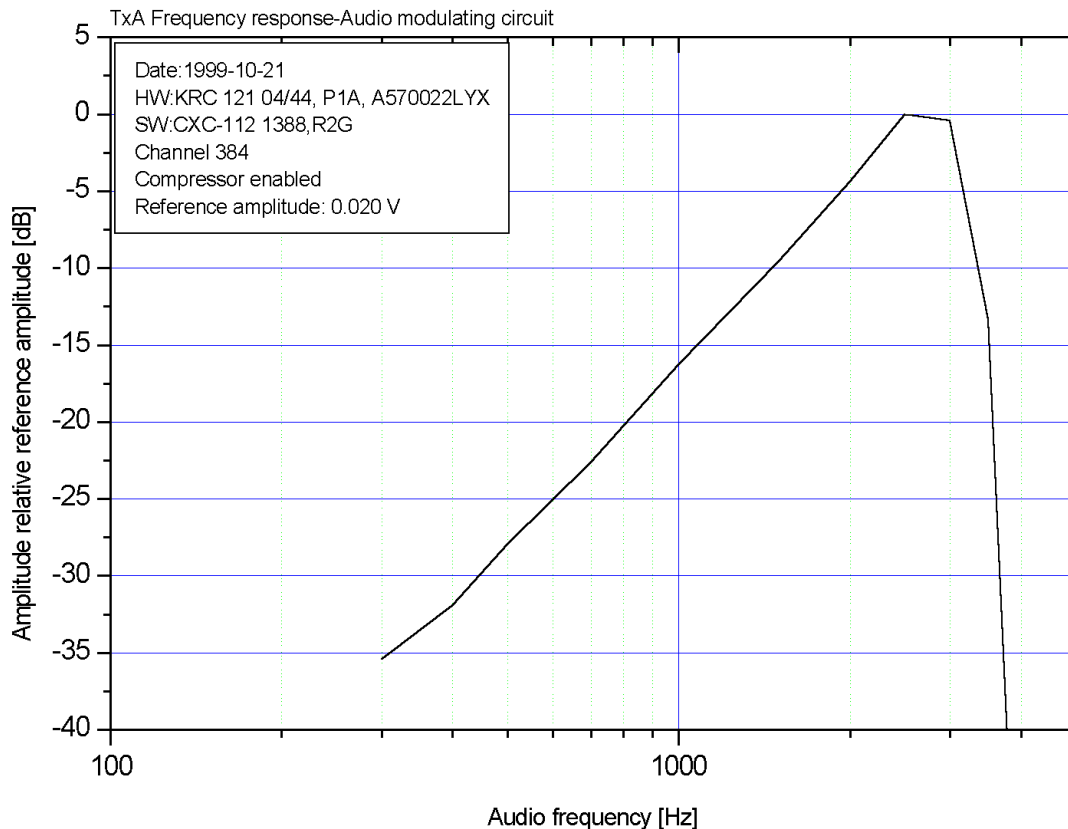

The measurement was made per TIA/IS-136/  
IS-138 using the following Equipment.

The input signal source was R&S CMTA 54  
Radiocommunication analyzer.  
The input signal was fed through a custom  
made audio-PCM-converter named Claudio.  
Radio frequency load 50 ohm attached to the  
output.  
The peak deviation was measured on a Rohde &  
Schwarz CMTA 54, Radiocommunication analyzer.

Note: In the RBS884 and RBS882 systems it is  
not possible for the TRX to operate without  
the compressor enabled.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS ANALOG MODE

---

---

2.1047 (b) Modulation Characteristics Modulation  
Limiting

The measurement methods per TIA/IS-136/  
IS-138 were used to obtain the results  
in the following page.

The measurement was made using the  
following equipment.

The input signal source was R&S CMTA 54  
Radiocommunication analyzer.  
The input signal was fed through a custom  
made audio-PCM-converter named Claudio.  
Radio frequency load 50 ohm attached to the  
output.  
The peak deviation was measured on a Rohde &  
Schwarz CMTA 54, Radiocommunication analyzer.


Note: The Modulation limiting is only  
measured with the compressor enabled.  
In the RBS884 and RBS882 systems it is not  
possible for the TRX to operate without the  
compressor enabled.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS ANALOG MODE

Modulation Limiting  
Measured Per TIA/IS-136/IS-138

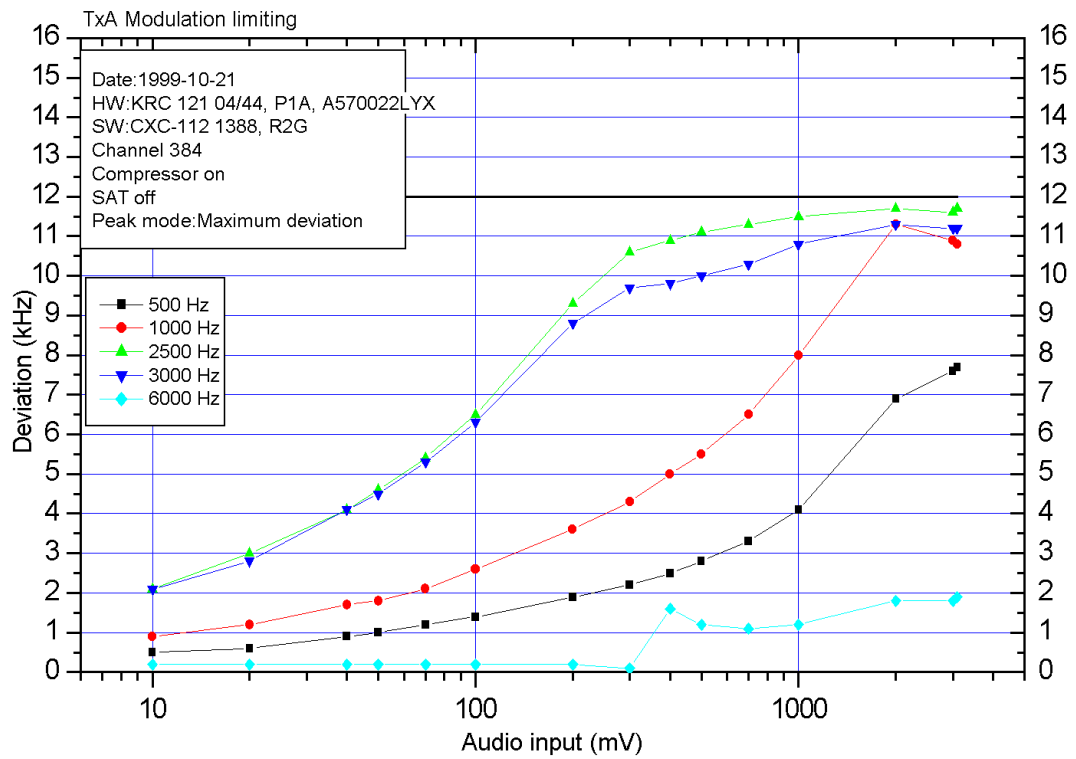


APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS ANALOG MODE

2.1047 (a) Modulation Characteristics Frequency Response  
Audio Low Pass Filtering

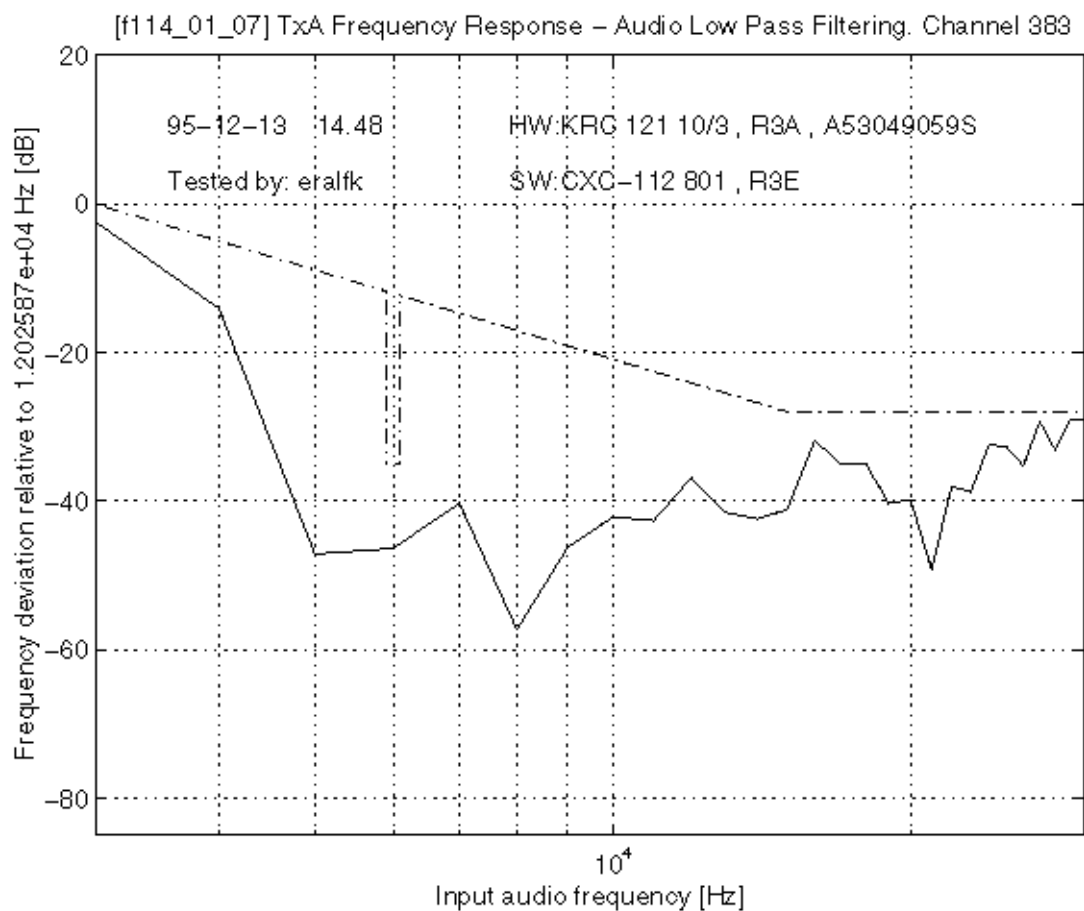

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS DIGITAL MODE

---

2.1047 (d) The modulation characteristics for the unit is measured with pseudorandom data modulation of the unit and the result is shown as the Error Vector Magnitude which is limited to 12.5 percent according to TIA/IS-136/IS-138

| Chan. | Freq.<br>(MHz) | Output Power<br>(Watts) | Error Vector<br>Magnitude (%) |
|-------|----------------|-------------------------|-------------------------------|
| 384   | 881.52         | 57.0                    | 2.22                          |
| 799   | 893.97         | 57.0                    | 2.24                          |
| 991   | 869.04         | 57.0                    | 2.23                          |

Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

The R&S ESI 40 was hooked up to a external  
10 MHz reference standard during the  
measurements.

The sync generator was hooked up to a 10 MHz  
reference standard from a HP89441 Vector  
Signal Analyzer during the measurements.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

MODULATION CHARACTERISTICS DATA PACKET MODE

---

2.1047 (d) The modulation characteristics for the unit is measured with pseudorandom data modulation of the unit and the result is shown as the peak deviation which shall be within 4752 Hz and 4848 Hz according to TIA/EIA-553.

| Chan. | Freq.<br>(MHz) | Output Power<br>(Watts) | Error Vector<br>Magnitude (%) |
|-------|----------------|-------------------------|-------------------------------|
| 384   | 881.52         | 57.0                    | 2.23                          |
| 799   | 893.97         | 57.0                    | 2.33                          |
| 991   | 869.04         | 57.0                    | 2.32                          |

Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

The R&S ESI 40 was hooked up to a external  
10 MHz reference standard during the  
measurements.

The sync generator was hooked up to a 10 MHz  
reference standard from a HP89441 Vector  
Signal Analyzer during the measurements.

APPLICANT:  
Ericsson Radio System AB

EXHIBIT 6  
Page 6.20

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH ANALOG MODE

---

---

2.1049 (c,1)(g) Occupied Bandwidth

The measurement methods per TIA/IS-136/IS-138 were used to obtain the results in the following 9 pages.

Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

The input signal source was a R&S CMTA 54 Radiocommunication analyzer for analog mode. The input signal was fed through a audio-PCM-converter named Claudio. Radio frequency 50 ohm load attached to the output.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


OCCUPIED BANDWIDTH ANALOG MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
4.5 dBm

RBW 300 Hz RF Att 10 dB  
VBW 300 Hz  
SWT 5.6 s Unit dBm

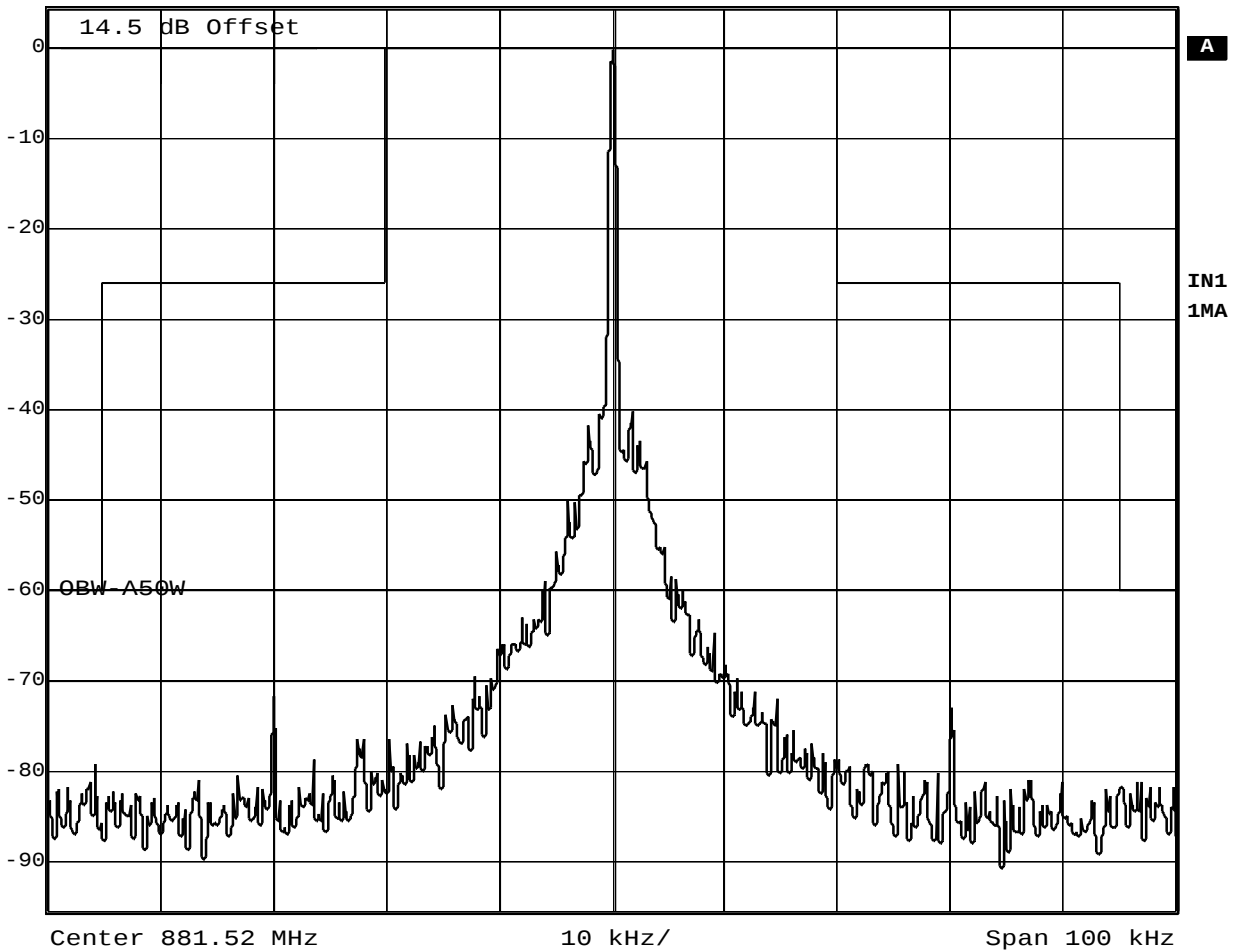

Date: 15.NOV.1999 13:31:22


Referenced to the Rated Power Output  
Continuous wave

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH ANALOG MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138

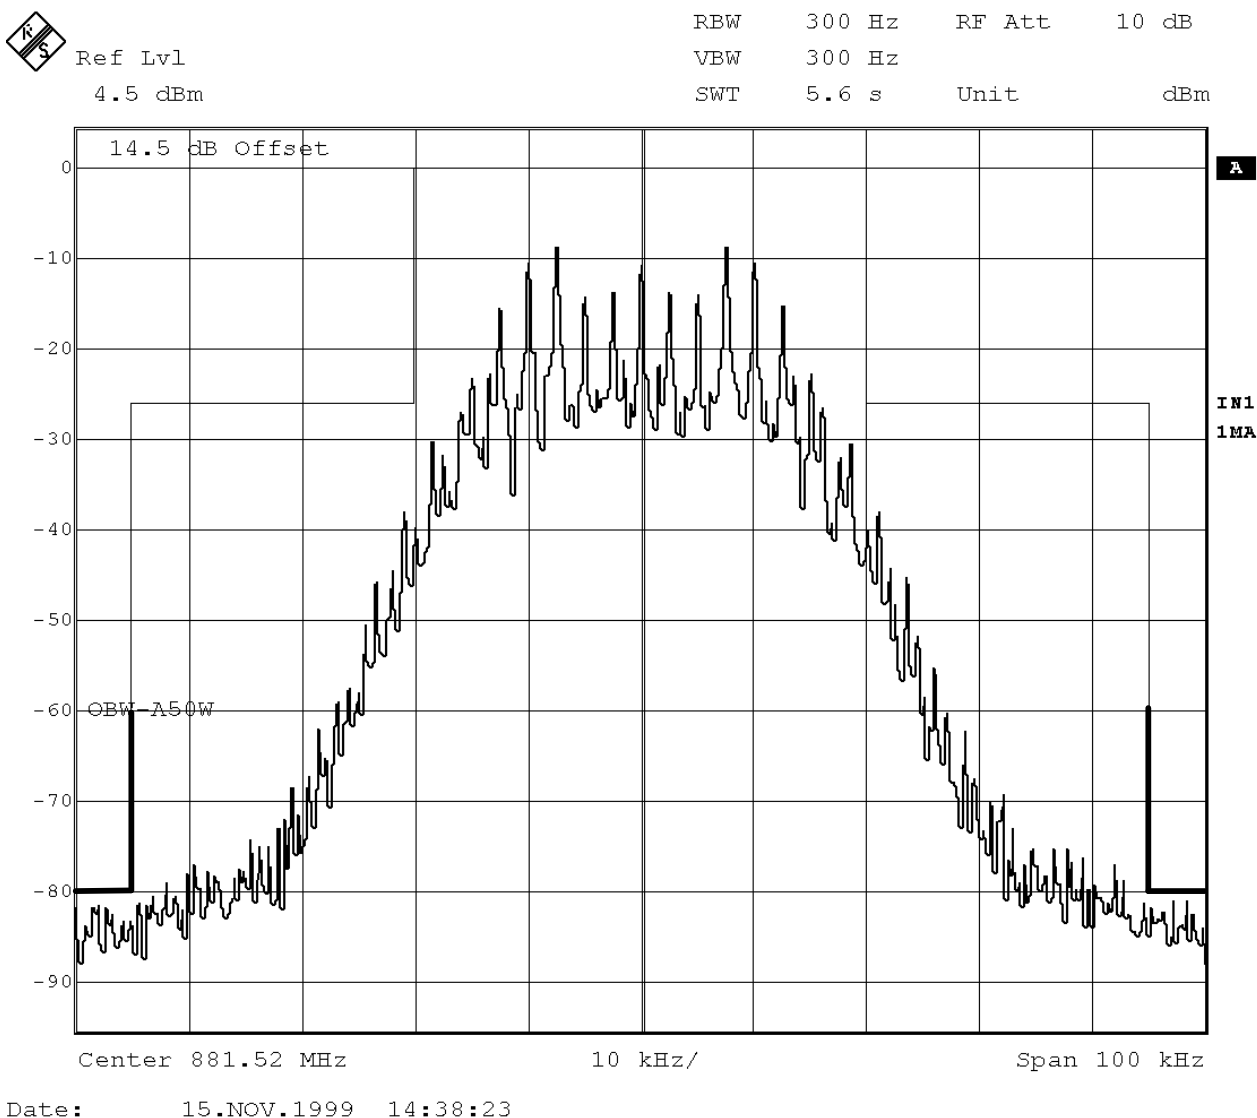

Referenced to the Rated Power Output  
Modulated with 2.5 kHz to 50% +16 dB with SAT 6 kHz

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH ANALOG MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138



Ref Lvl 4.5 dBm  
RBW 300 Hz  
VBW 300 Hz  
SWT 11.5 s  
RF Att 10 dB  
Unit dBm

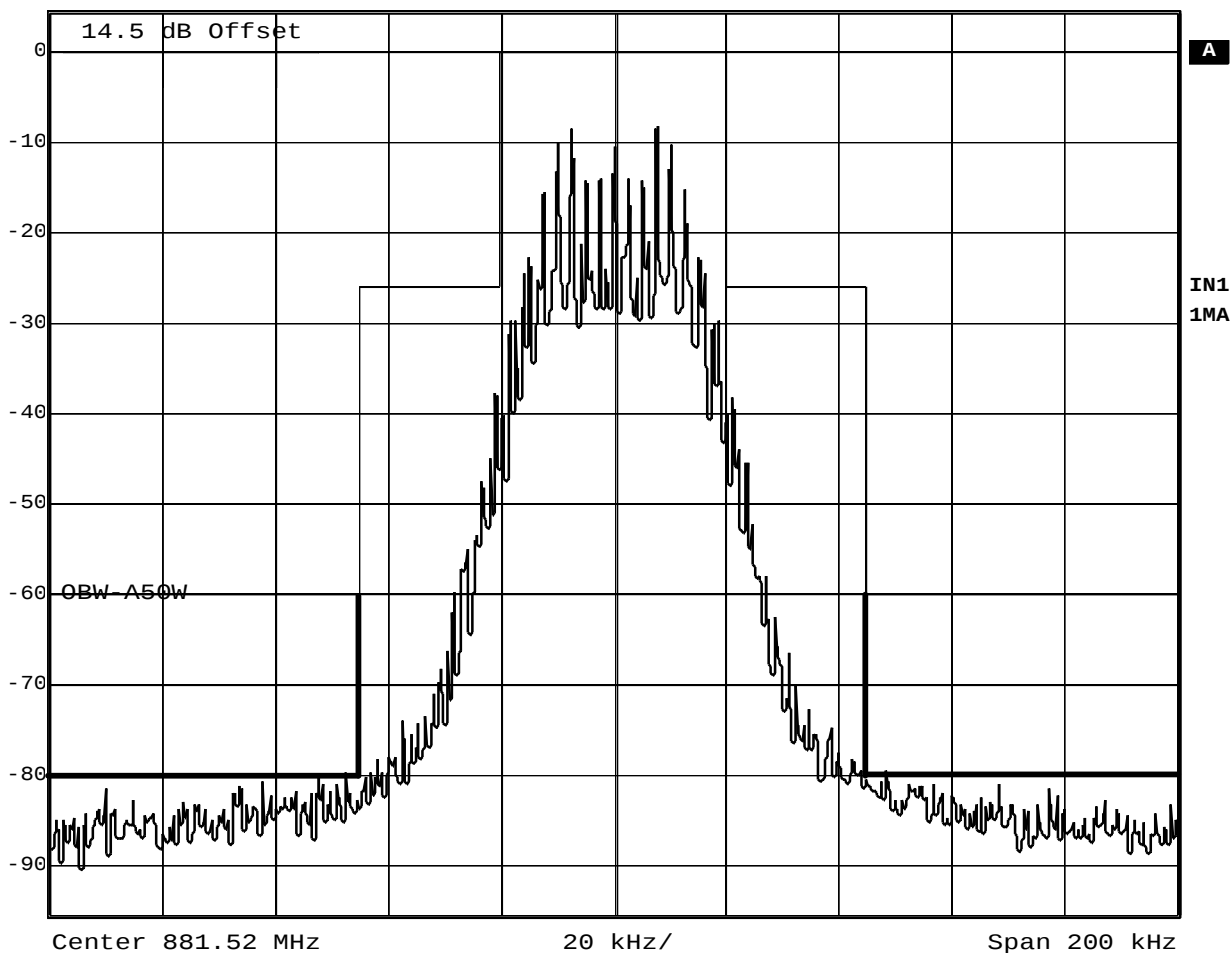

Date: 15.NOV.1999 13:39:51


Referenced to the Rated Power Output  
Modulated with 2.5 kHz to 50% +16 dB with SAT 6 kHz

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH ANALOG MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138

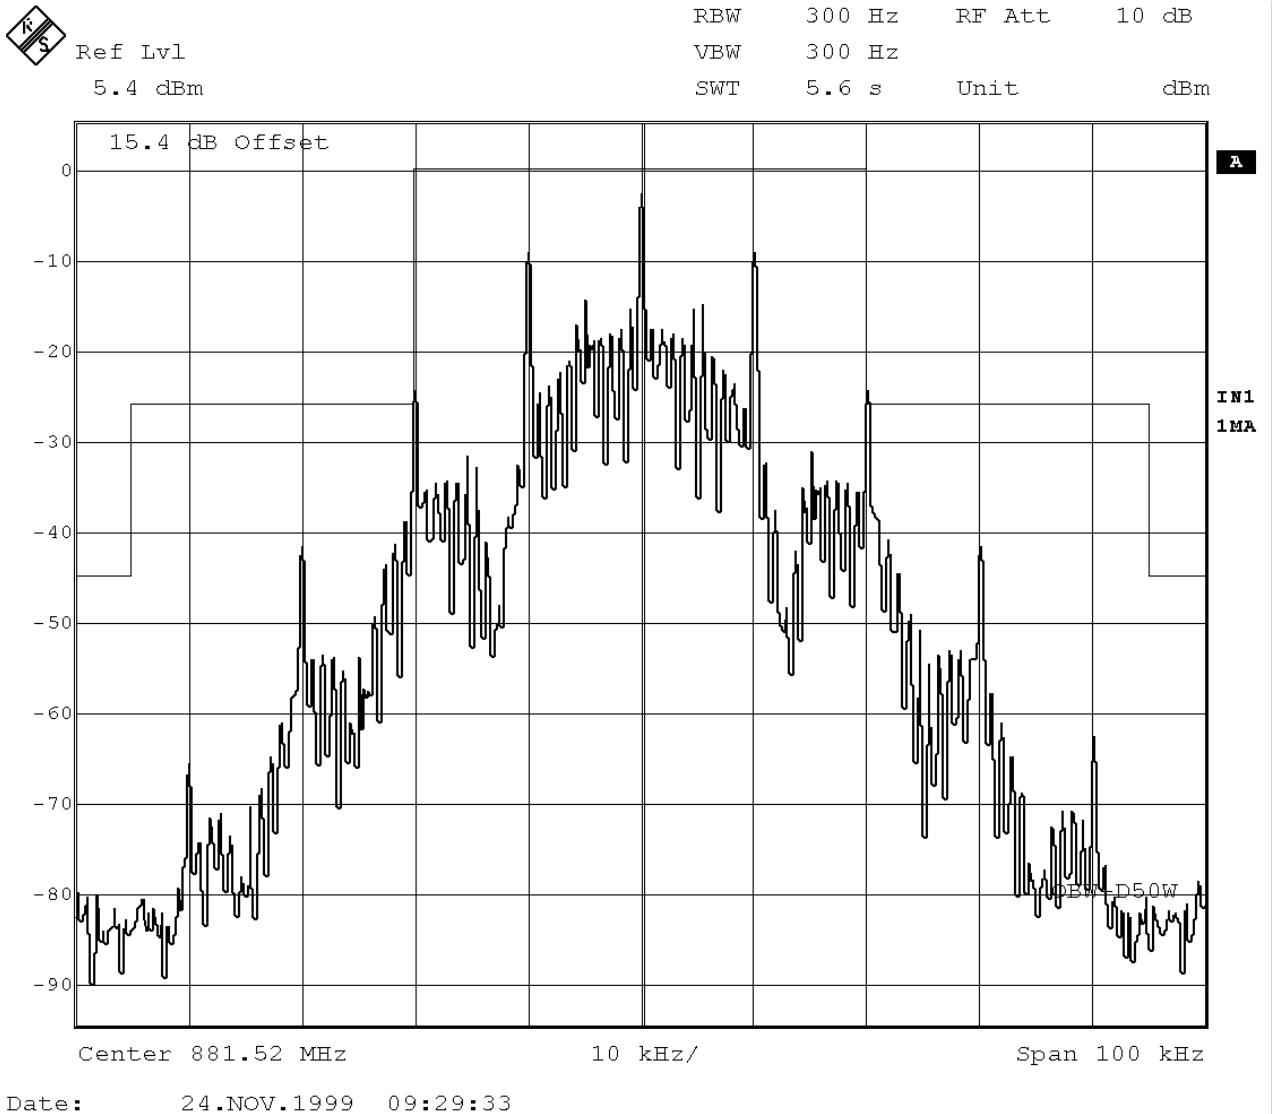


Referenced to the Rated Power Output  
Modulated with Wideband Data 10 kHz

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH ANALOG MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138

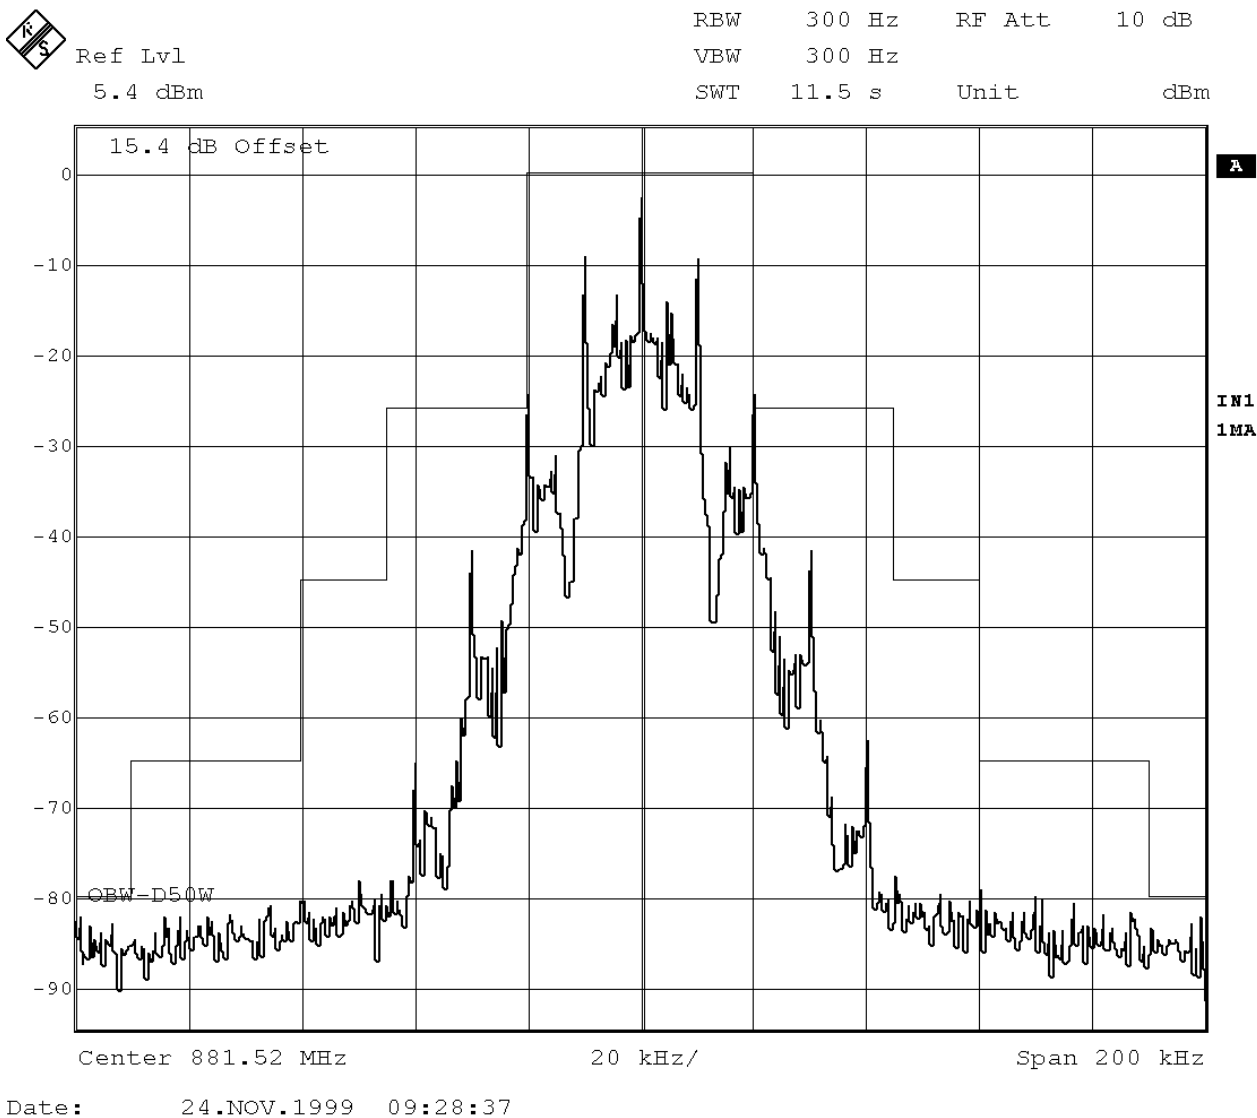

Referenced to the Rated Power Output  
Modulated with Wideband Data 10 kHz

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


OCCUPIED BANDWIDTH DIGITAL MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
5.4 dBm

RBW 300 Hz RF Att 10 dB  
VBW 300 Hz  
SWT 5.6 s Unit dBm

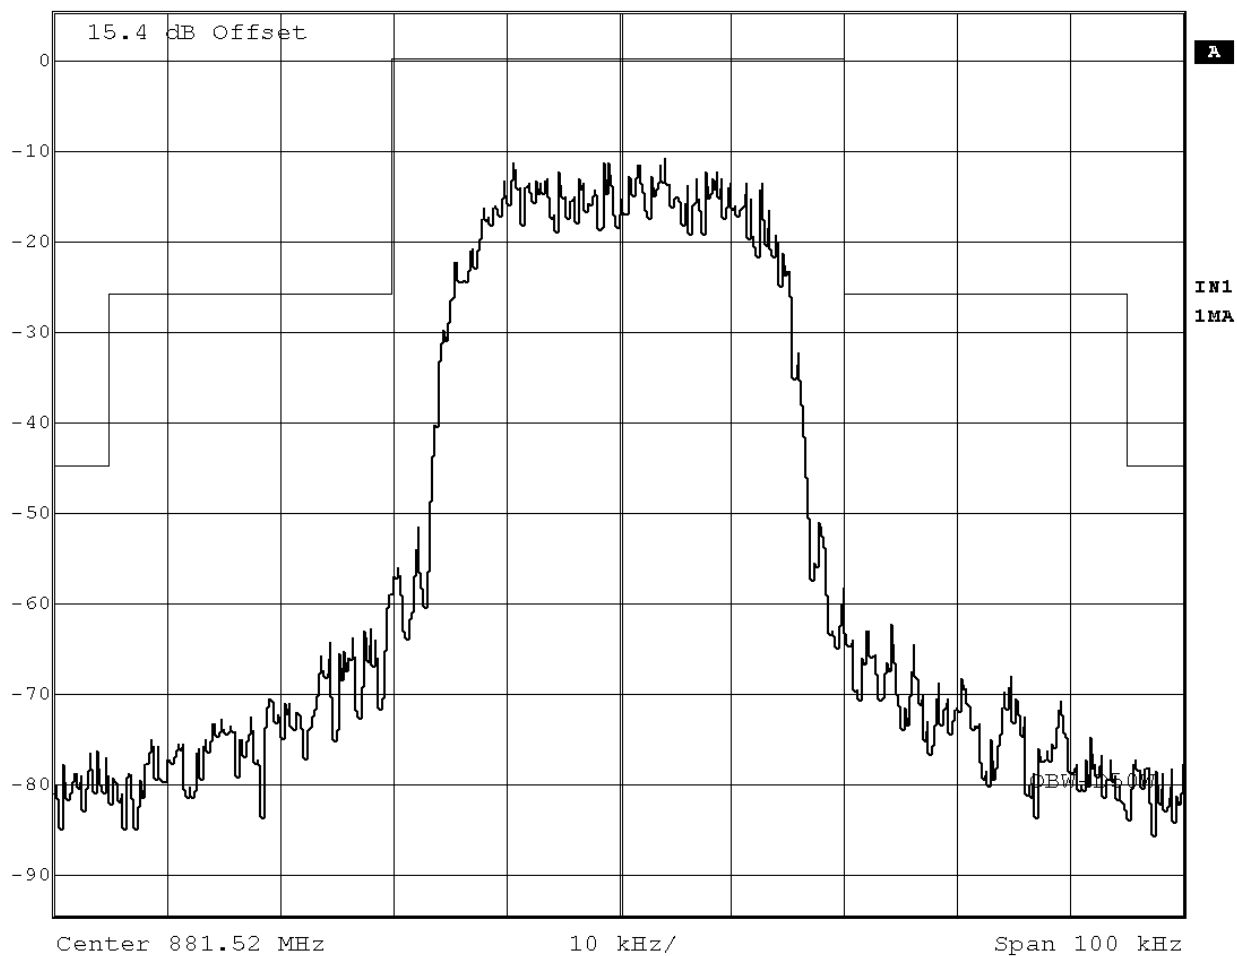

Date: 24.NOV.1999 09:37:10


Referenced to the Rated Power Output  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH DIGITAL MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138

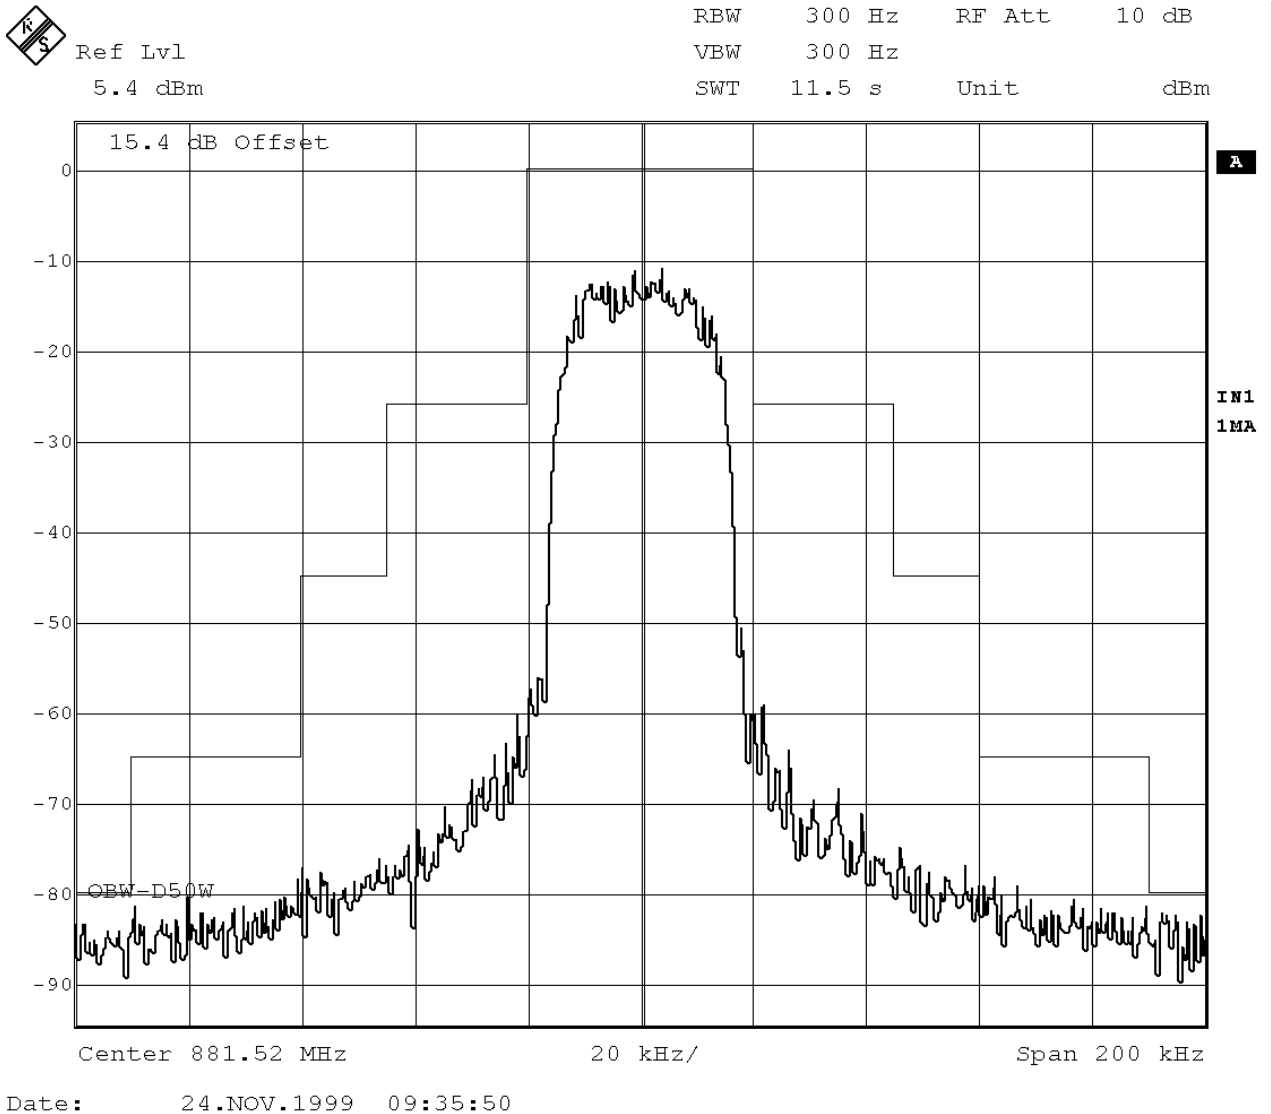

Referenced to the Rated Power Output  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138  
and TIA/EIA-553



|         |                  |     |        |        |       |
|---------|------------------|-----|--------|--------|-------|
| Ref Lvl | Marker 1 [T1]    | RBW | 300 Hz | RF Att | 10 dB |
| 3.4 dBm | -84.49 dBm       | VBW | 300 Hz |        |       |
|         | 881.56500000 MHz | SWT | 5 s    | Unit   | dBm   |

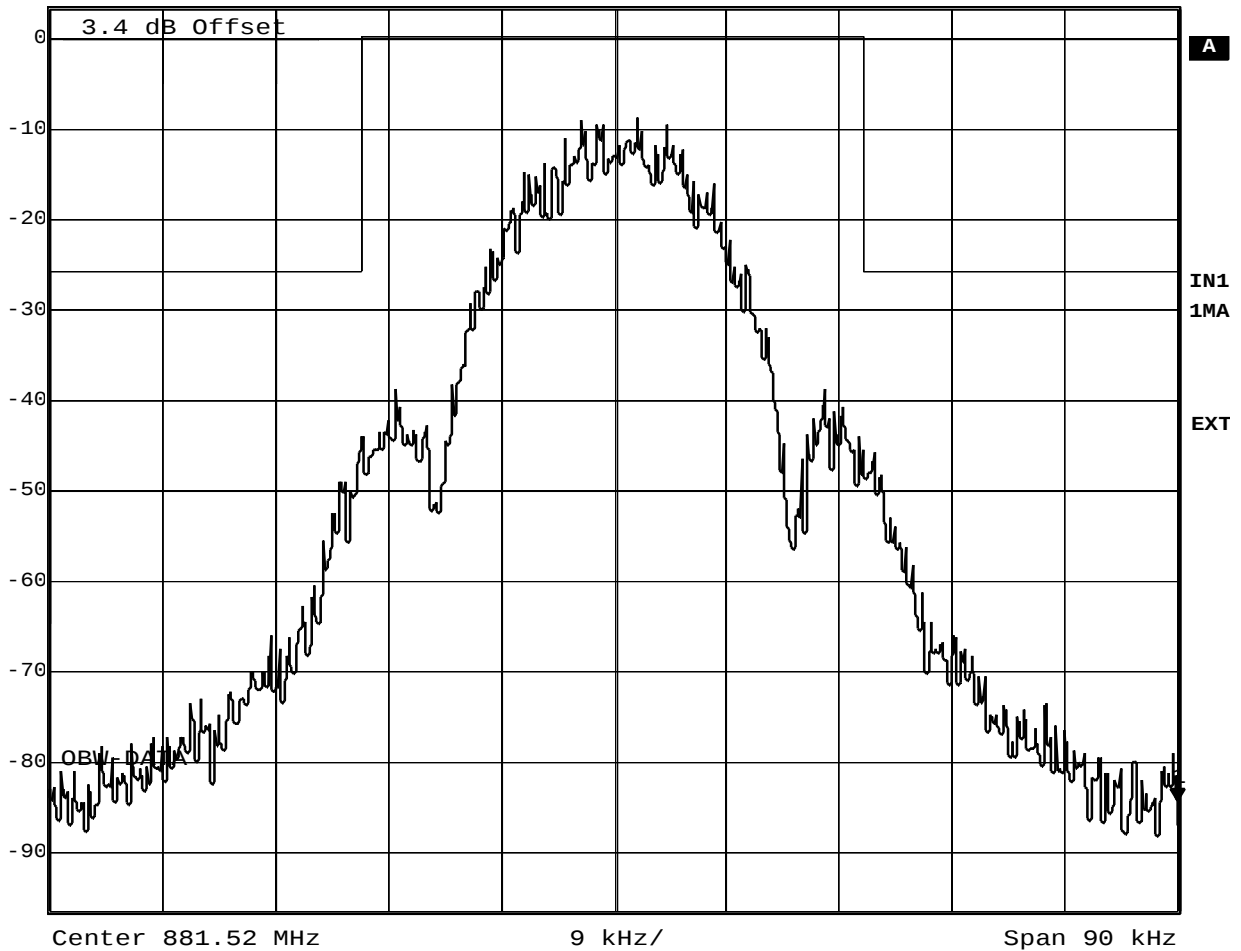

Date: 27.SEP.1999 17:53:43


Referenced to the Rated Power Output  
Modulated with 19.2 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

OCCUPIED BANDWIDTH DATA PACKET MODE

Modulation Sideband Spectrum  
Measured Per TIA/IS-136/IS-138  
and TIA/EIA-553

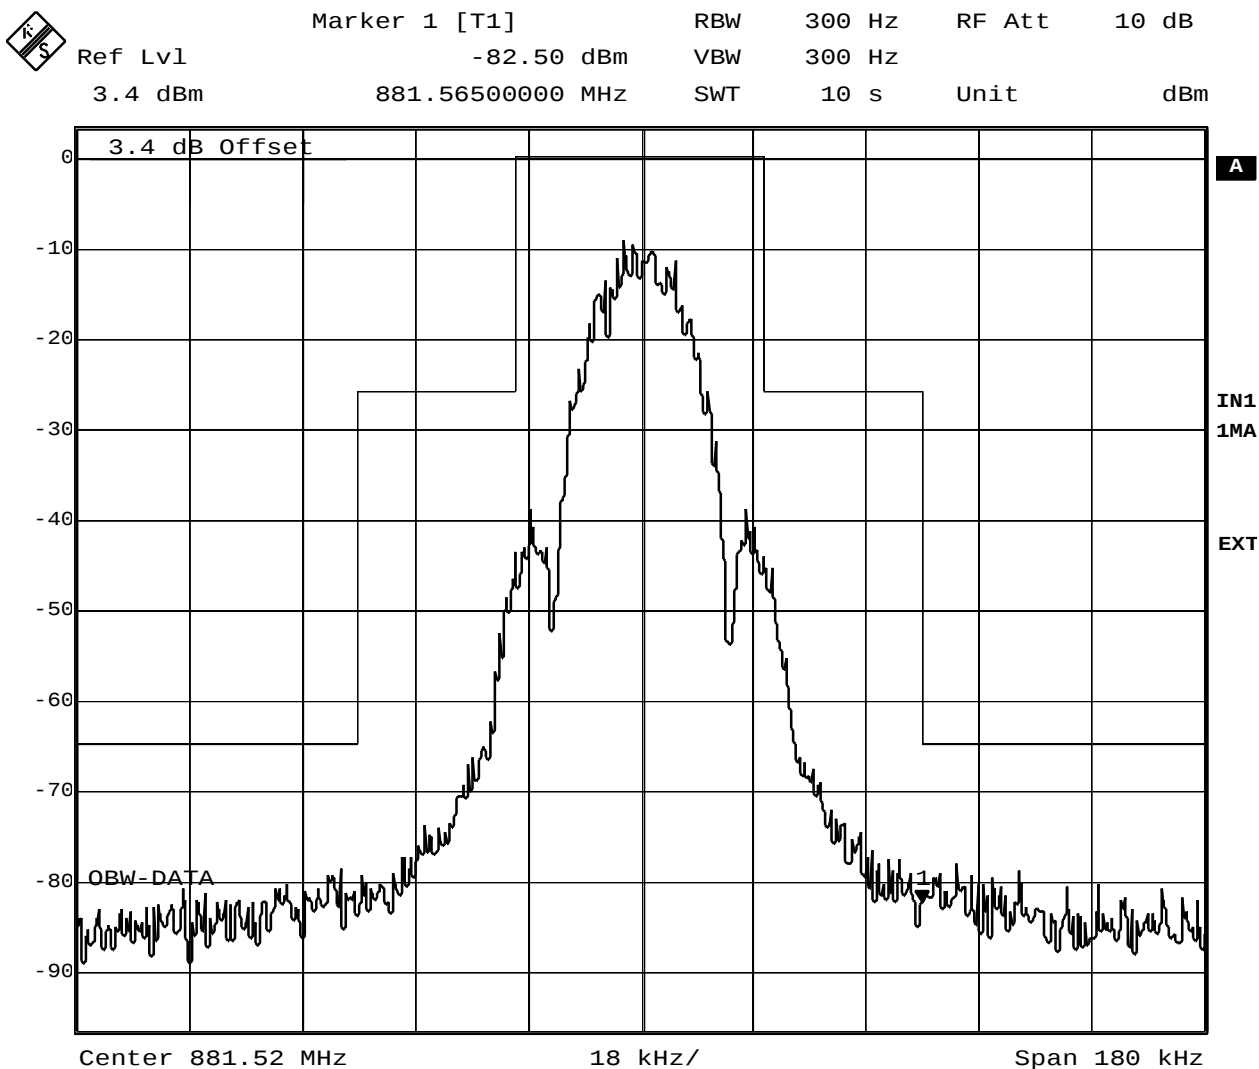

Date: 27.SEP.1999 17:54:21

Referenced to the Rated Power Output  
Modulated with 19.2 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

## CONDUCTED SPURIOUS EMISSIONS

---

2.1051

### Conducted Spurious Emissions

Spurious emissions at the antenna terminal (conducted) when properly loaded with an appropriate artificial antenna were measured per EIA/IS-138 § 3.4.2.

Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

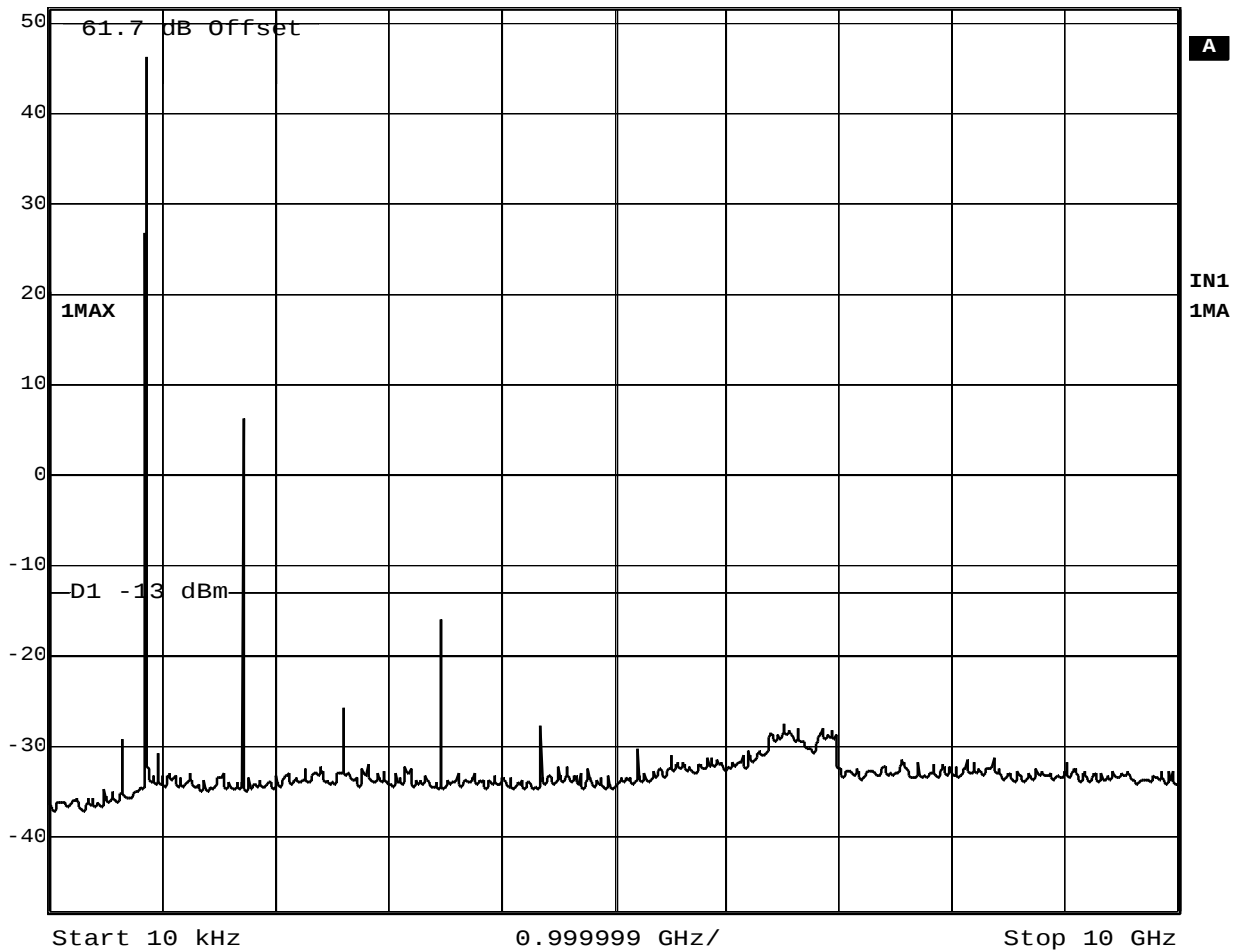

Date: 19.OCT.1999 12:13:28

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 12.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

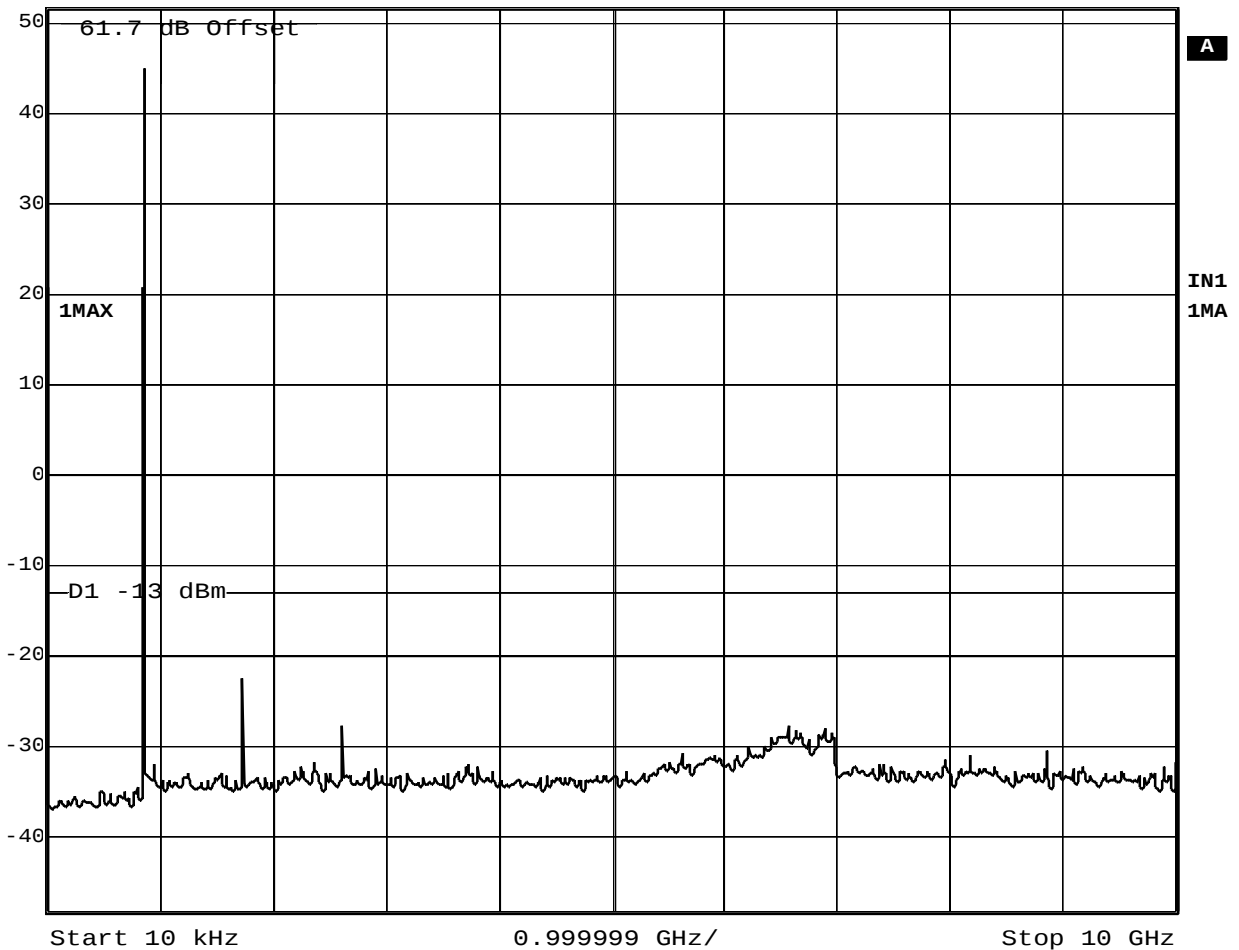

Date: 19.OCT.1999 12:25:32

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 12.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

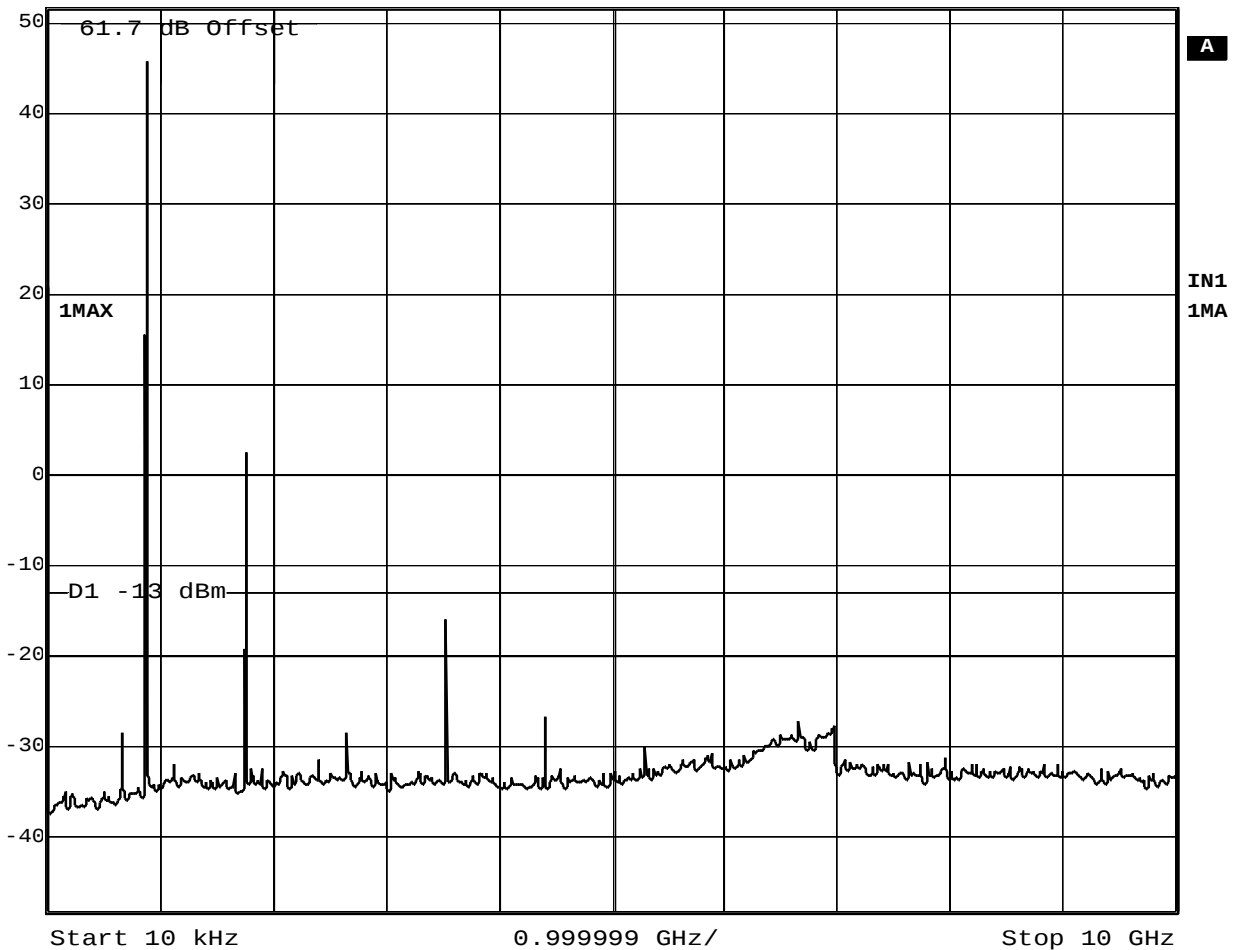

Date: 19.OCT.1999 12:18:14

Rated Power Output = 57.0 Watt  
Channel 384 / Carrier frequency = 881.52 MHz

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 12.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

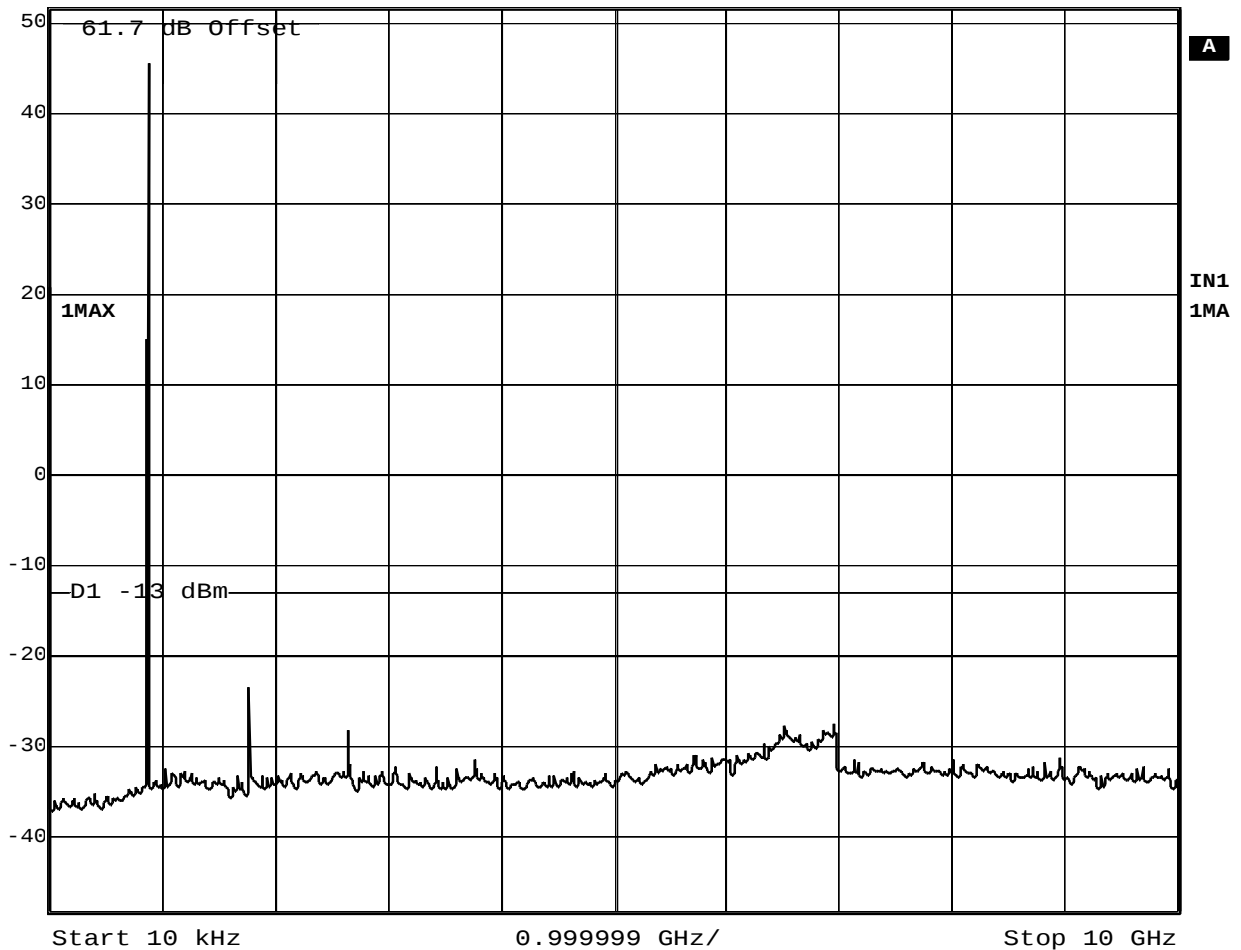

Date: 19.OCT.1999 12:21:02

Rated Power Output = 57.0 Watt  
Channel 384 / Carrier frequency = 881.52 MHz

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 12.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

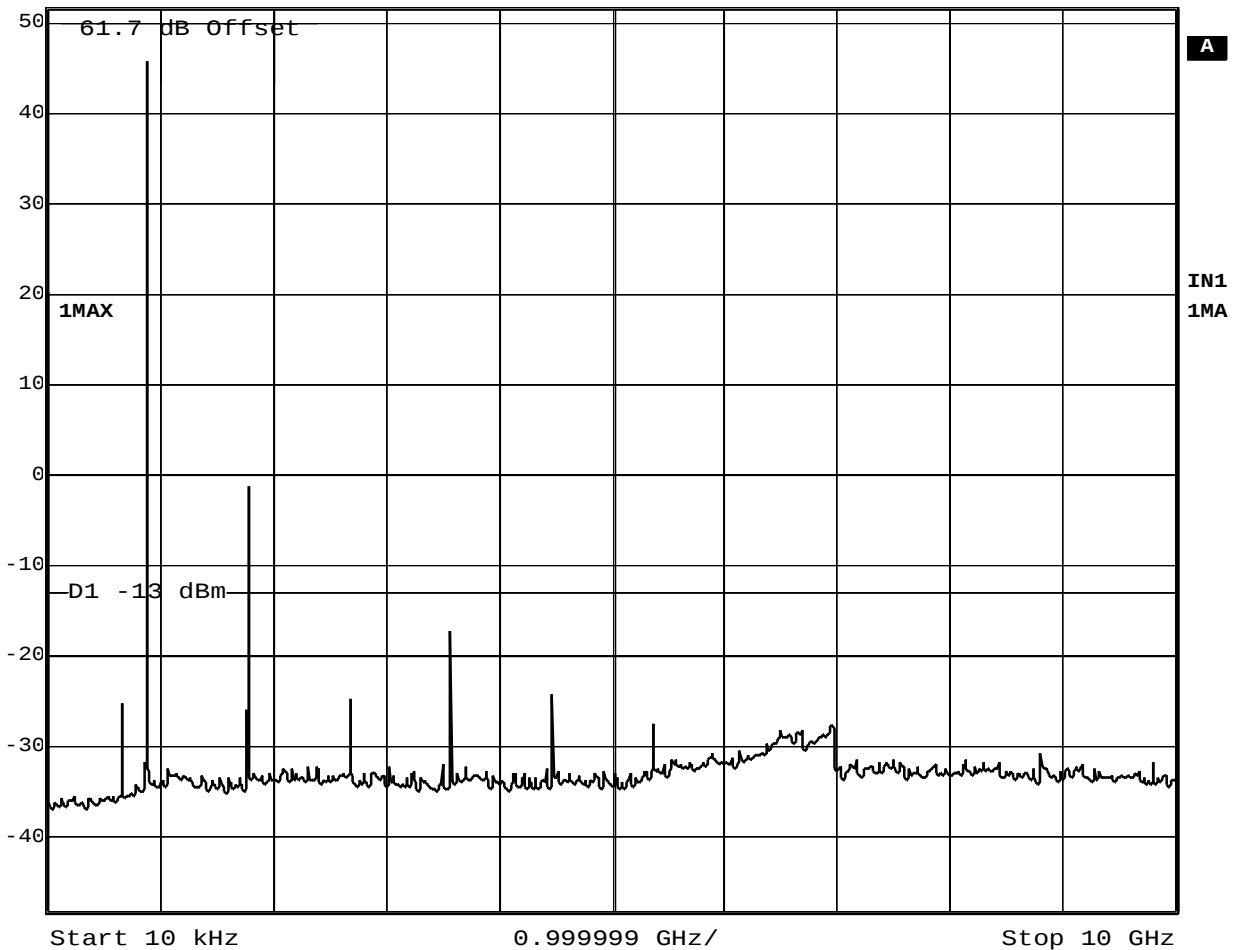

Date: 19.OCT.1999 12:11:35

Rated Power Output = 11.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS ANALOG MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

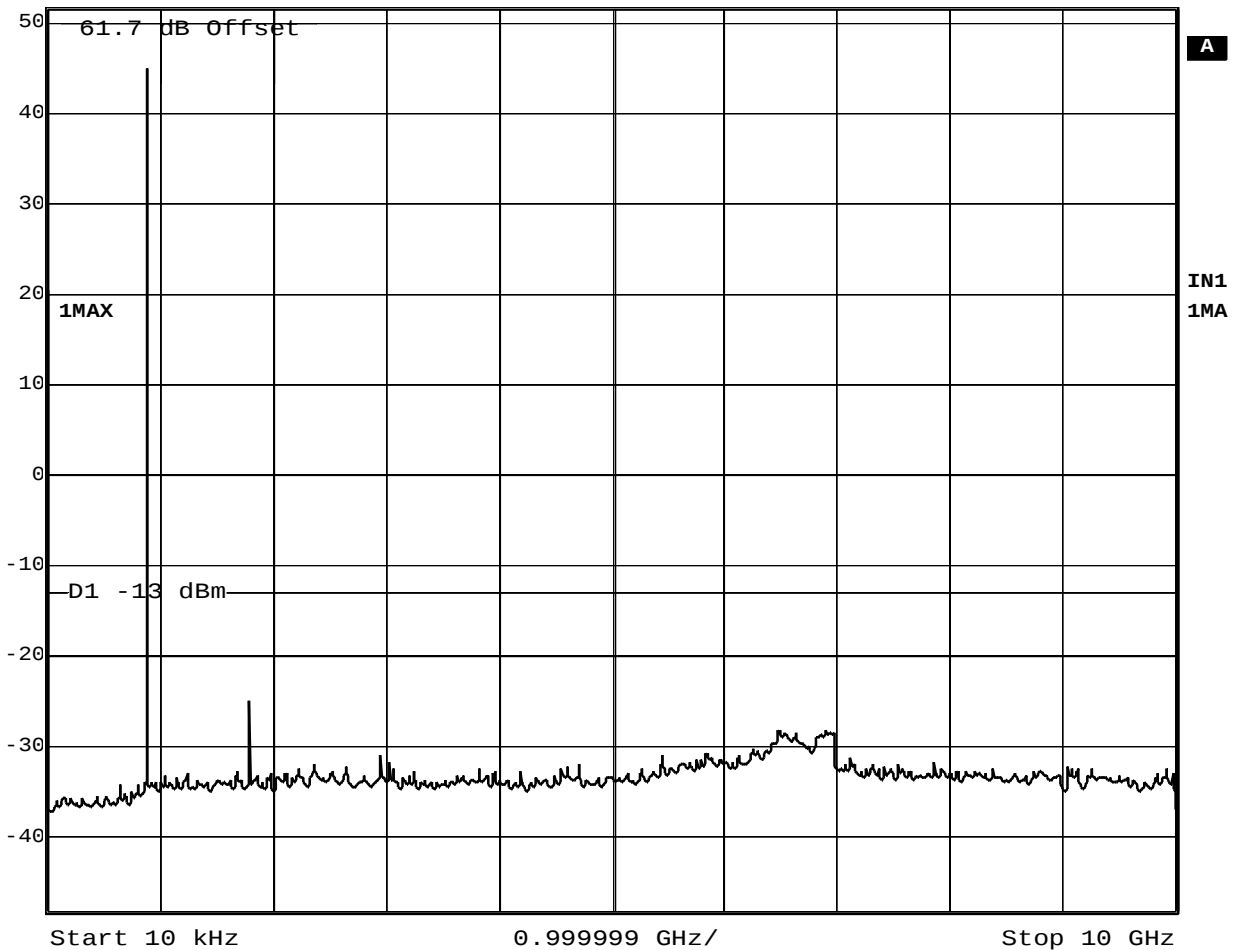

Date: 19.OCT.1999 12:27:06

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

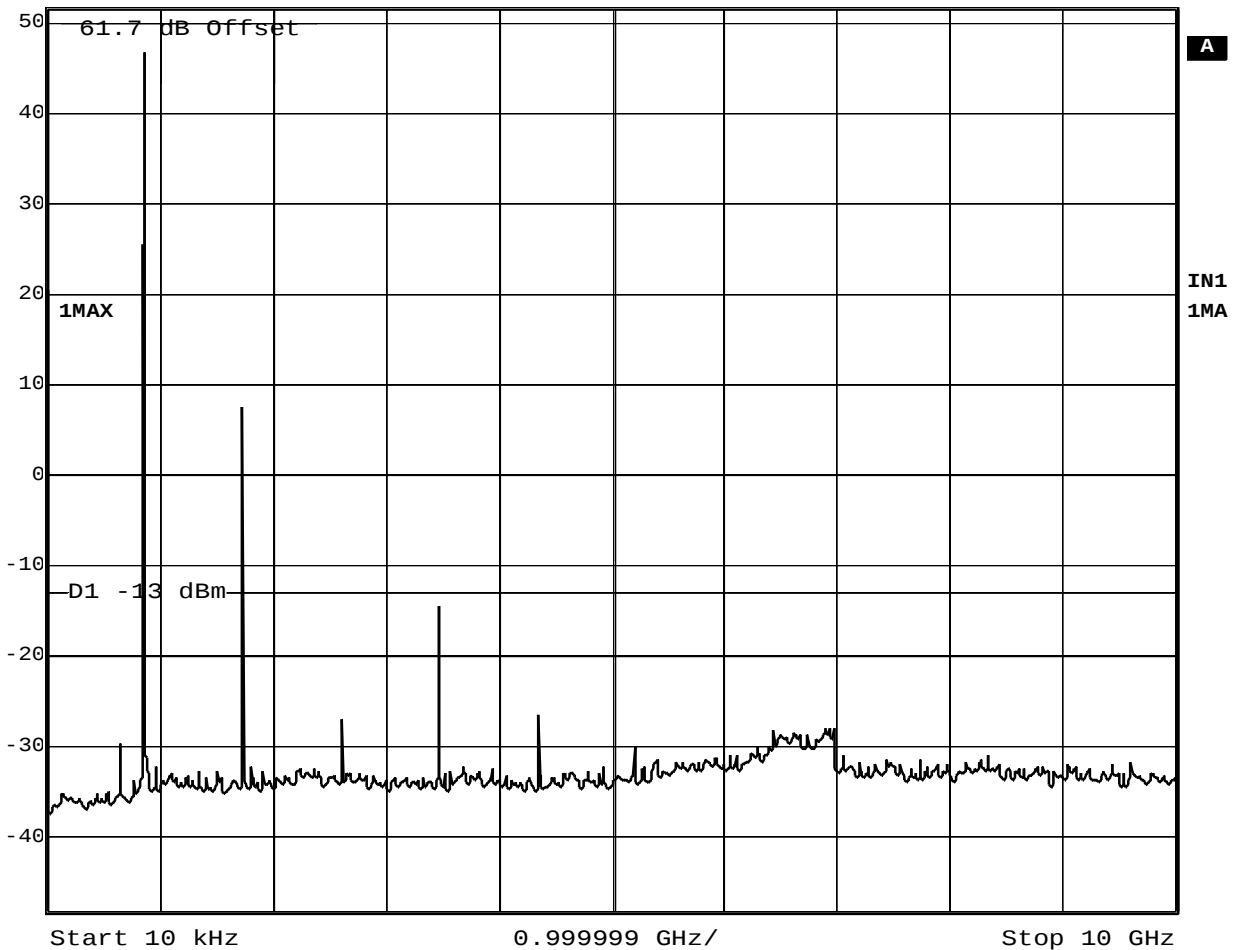

Date: 19.OCT.1999 12:14:58

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

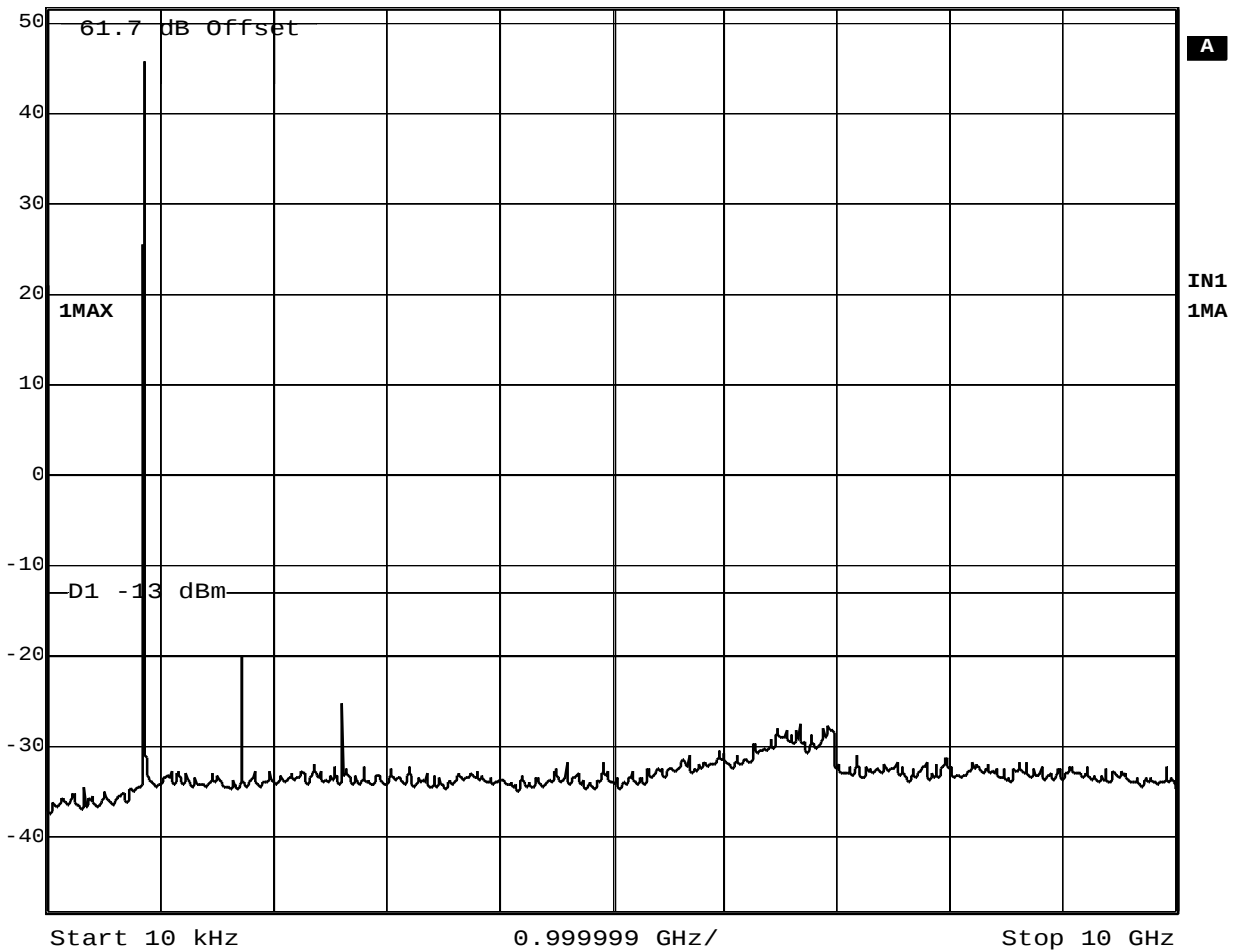

Date: 19.OCT.1999 12:24:16

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA


Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138

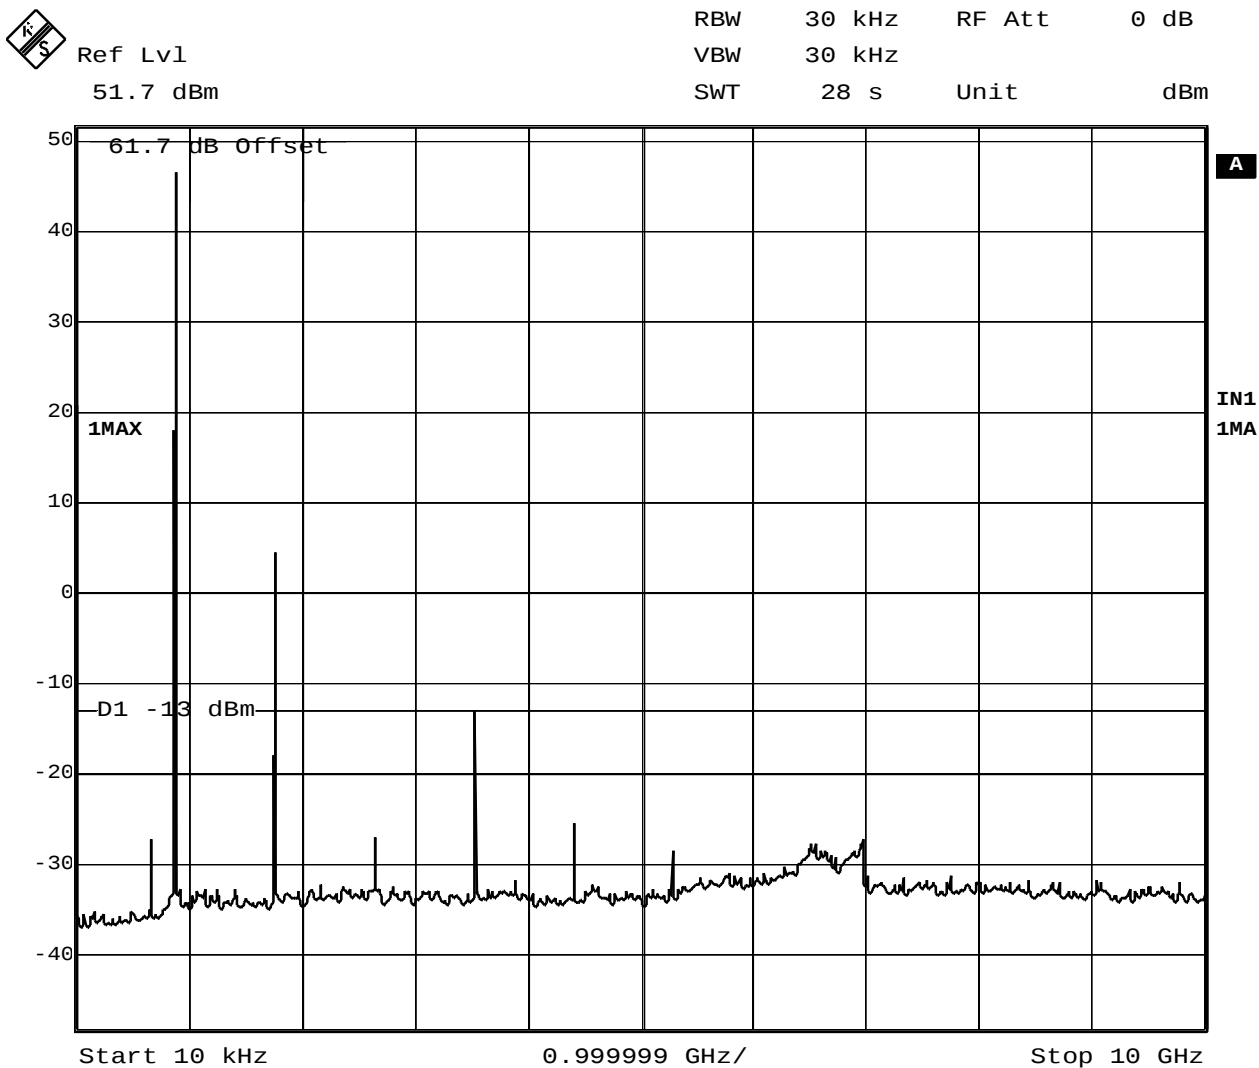

Date: 19.OCT.1999 12:16:48

Rated Power Output = 57.0 Watt  
Channel 384 / Carrier frequency = 881.52 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

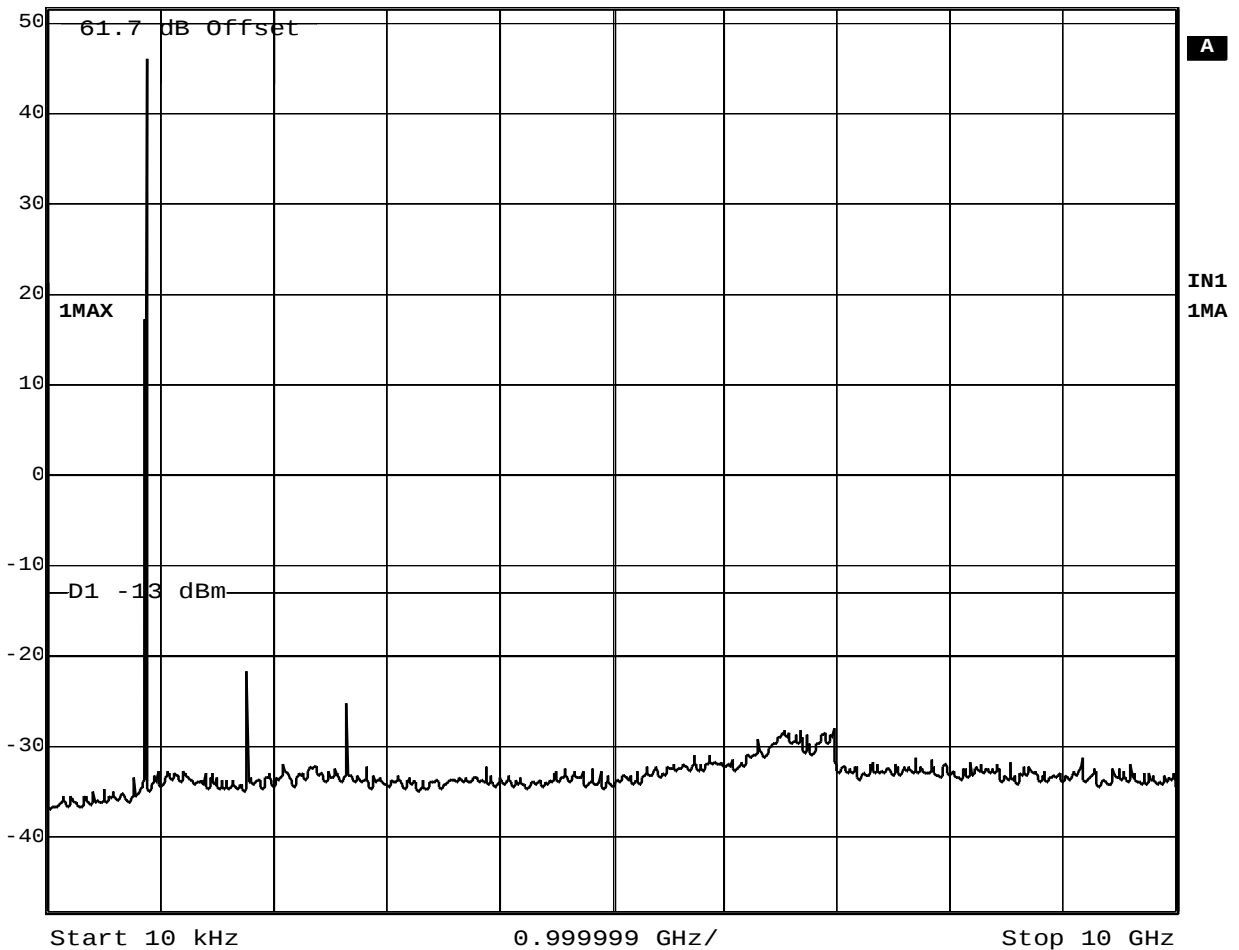

Date: 19.OCT.1999 12:22:33

Rated Power Output = 57.0 Watt  
Channel 384 / Carrier frequency = 881.52 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

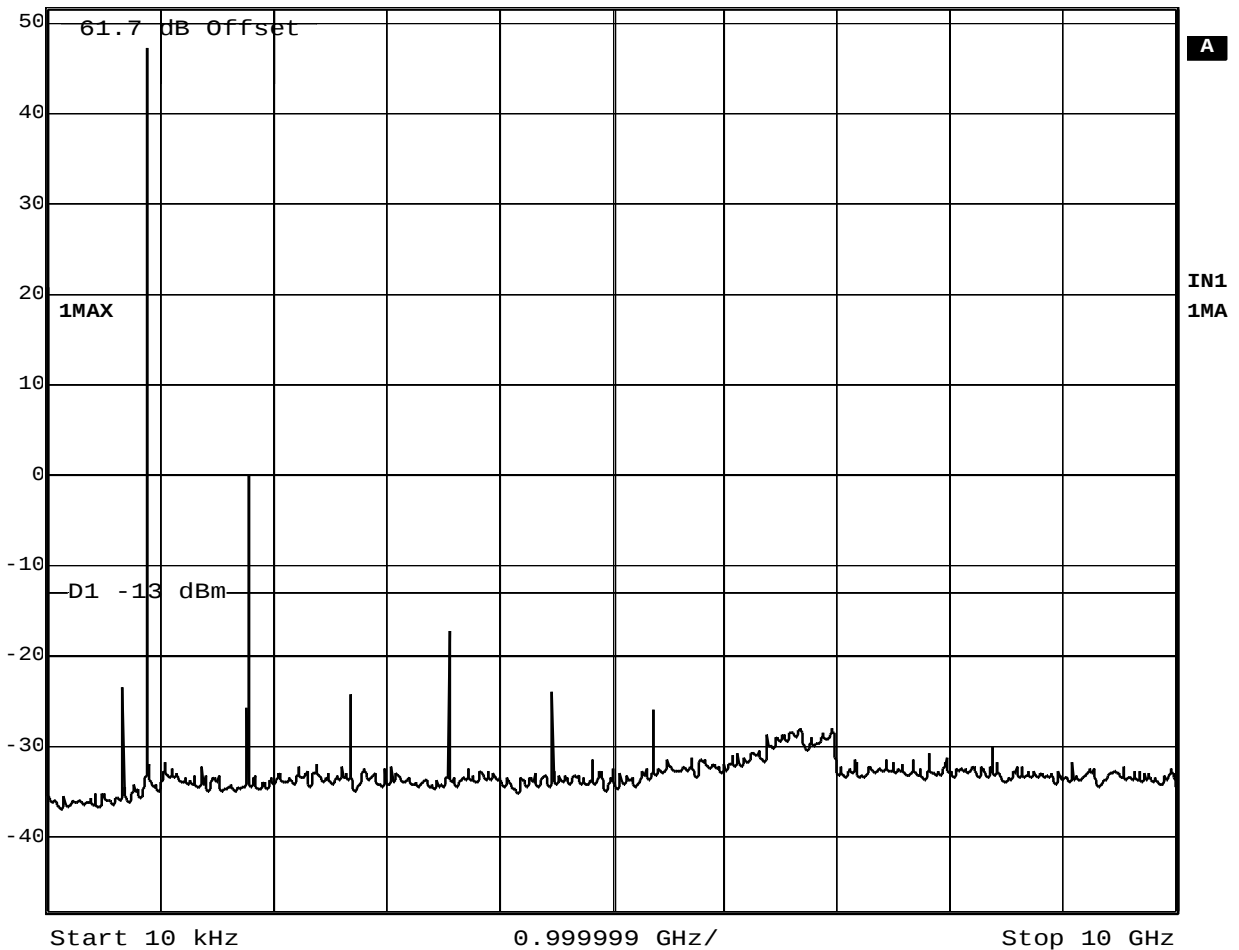

Date: 19.OCT.1999 12:09:58

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

Note: Measured without bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DIGITAL MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
51.7 dBm

RBW 30 kHz RF Att 0 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

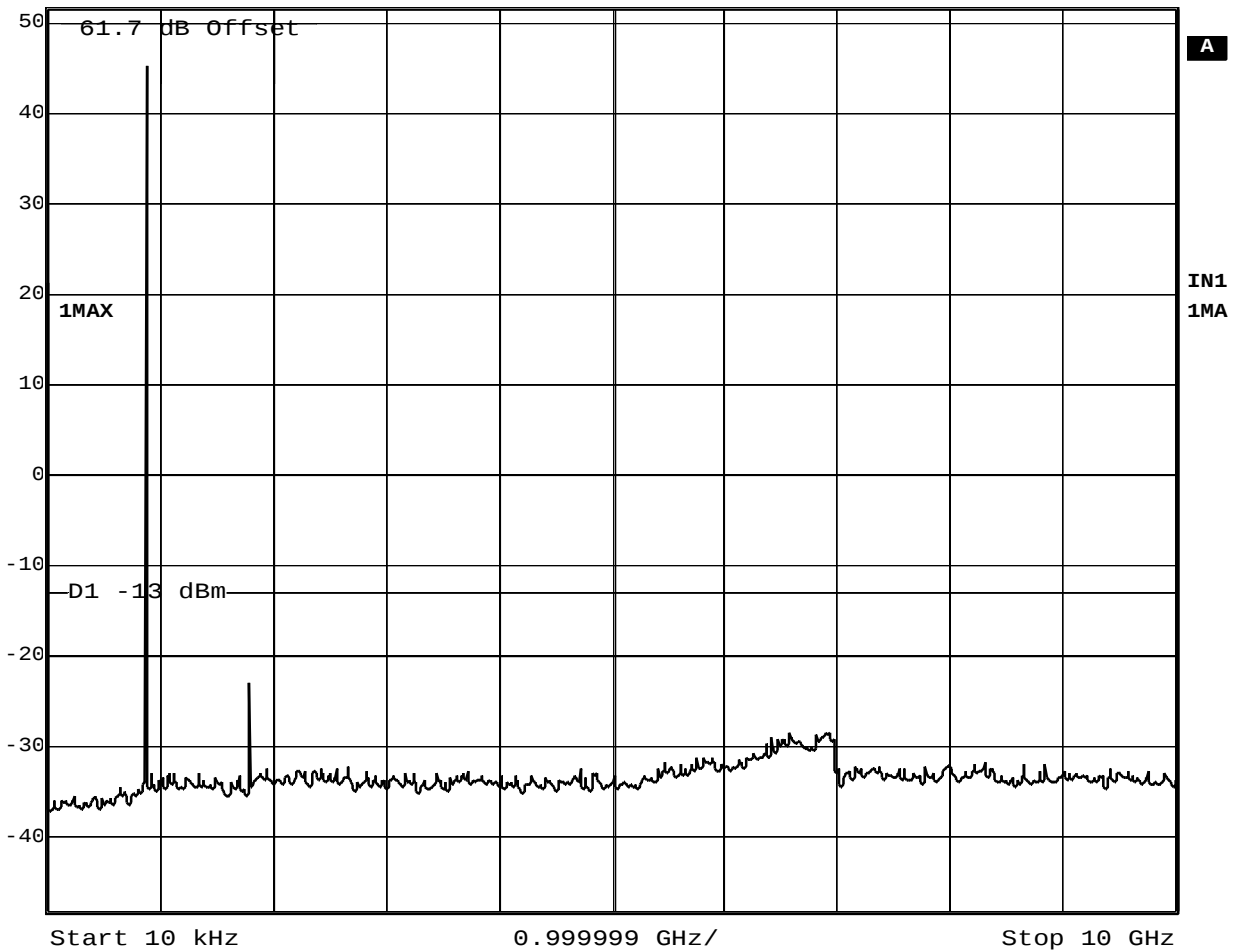

Date: 19.OCT.1999 12:28:26

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DATA PACKET MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
52.5 dBm

RBW 30 kHz RF Att 10 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

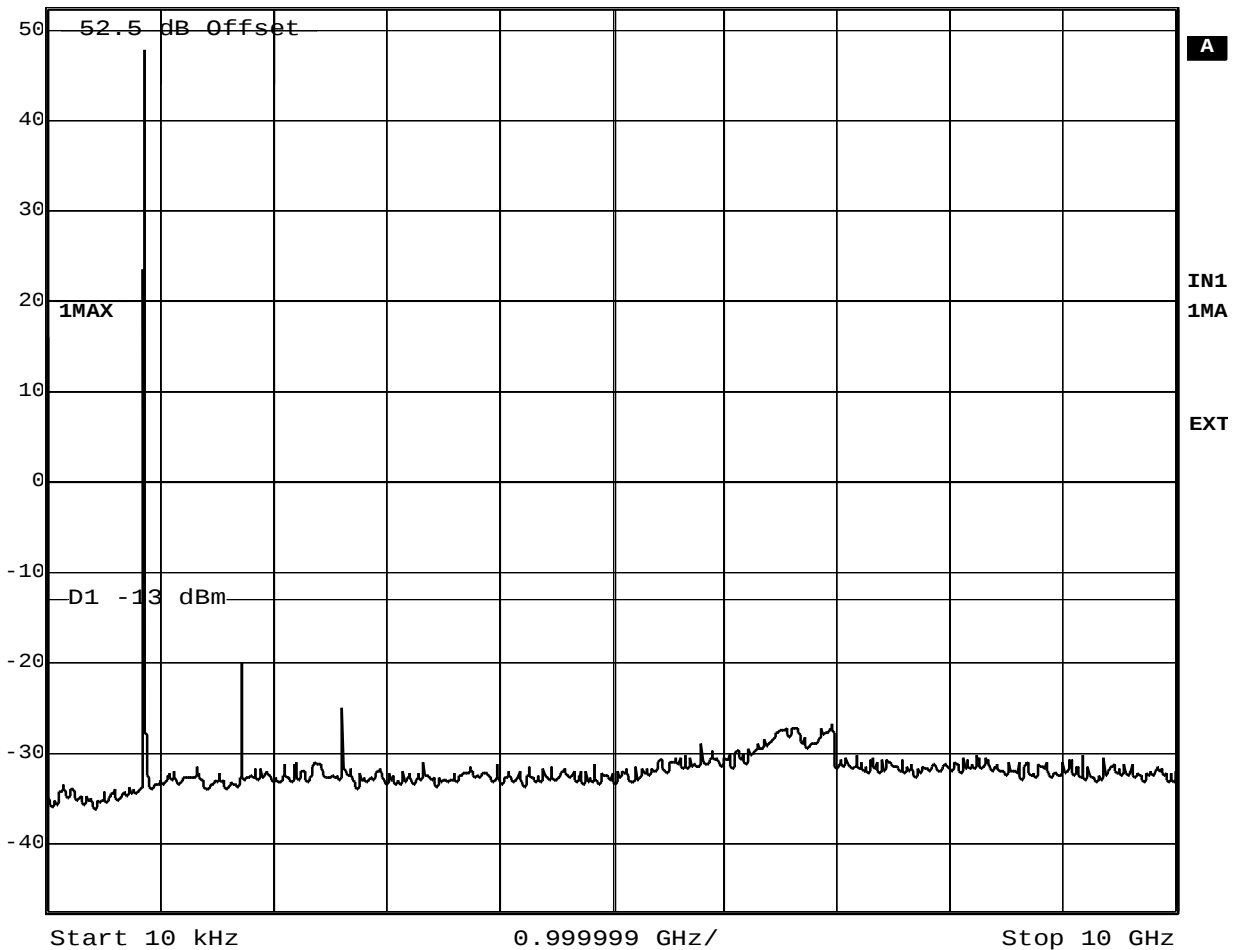

Date: 27.SEP.1999 18:06:28

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 19.2 kbs PSEUDORANDOM DATA

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DATA PACKET MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
52.5 dBm

RBW 30 kHz RF Att 10 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

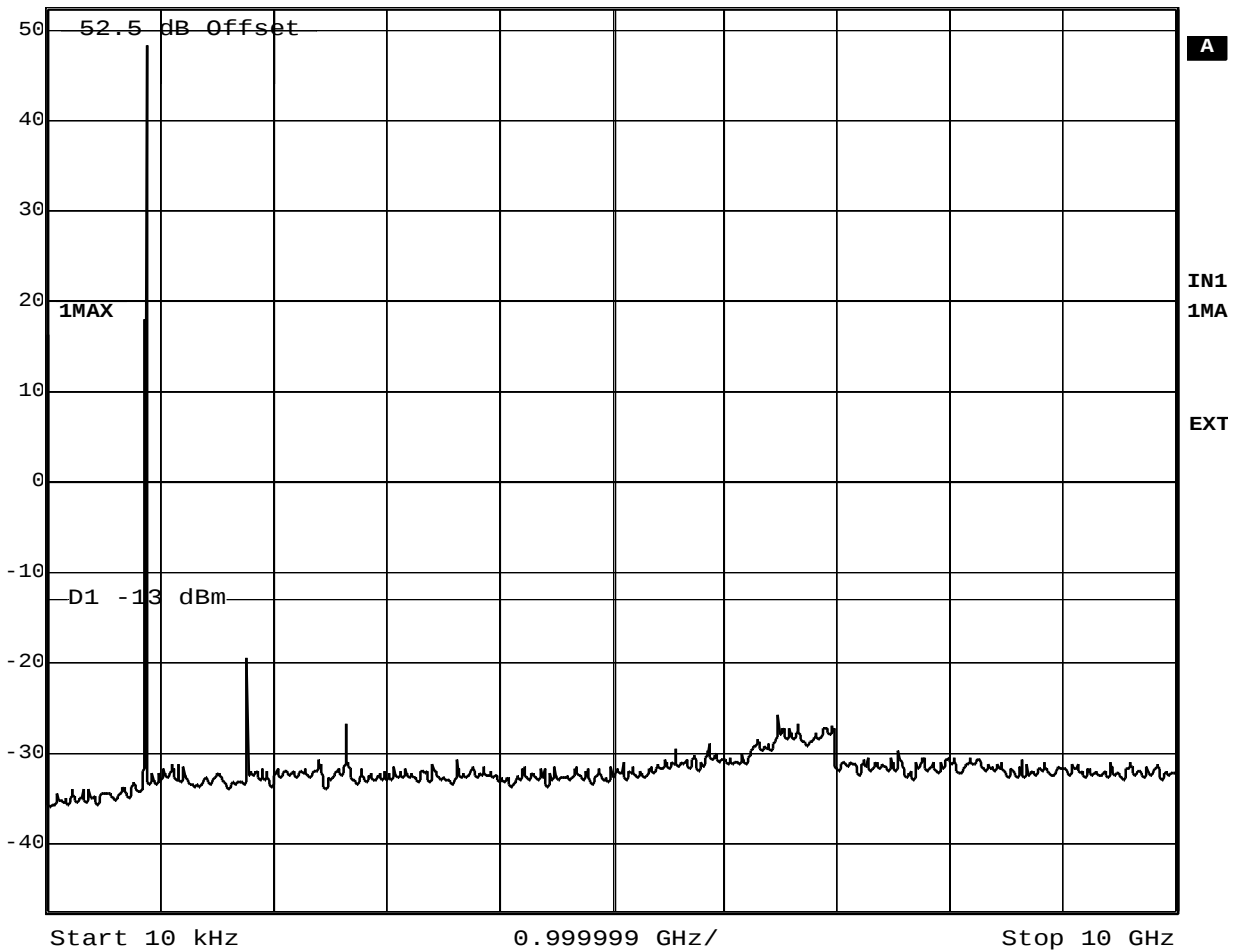

Date: 27.SEP.1999 18:04:40

Rated Power Output = 57.0 Watt  
Channel 384 / Carrier frequency = 881.52 MHz  
Modulated with 19.2 kbs PSEUDORANDOM DATA

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41


CONDUCTED SPURIOUS EMISSIONS DATA PACKET MODE

Conducted Spurious Emission  
Measured Per TIA/IS-136/IS-138



Ref Lvl  
52.5 dBm

RBW 30 kHz RF Att 10 dB  
VBW 30 kHz  
SWT 28 s Unit dBm

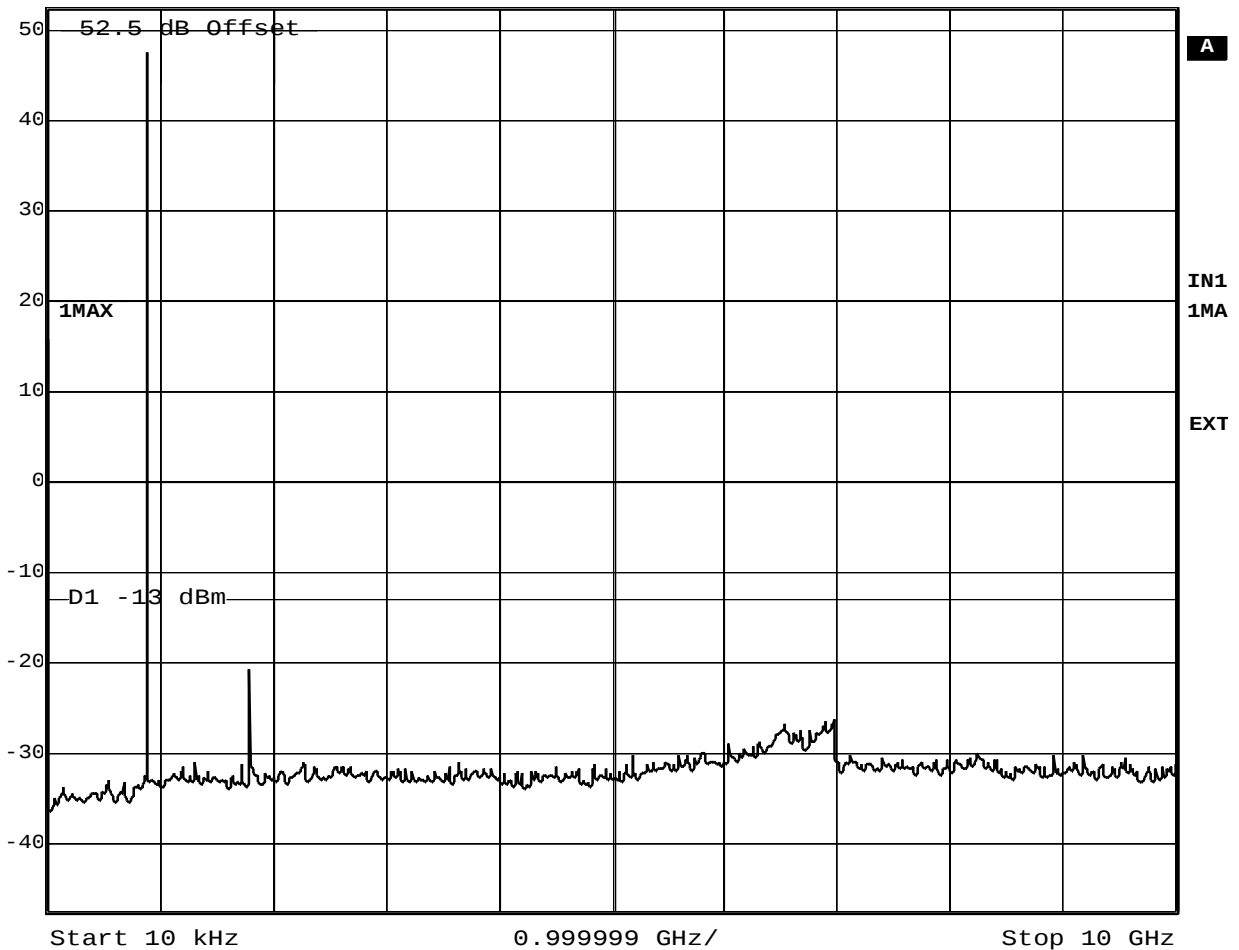

Date: 27.SEP.1999 18:08:05

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 19.2 kbs PSEUDORANDOM DATA

Note: Measured **with** bandpass filter on TRX output.  
See description of Spurious and Harmonic  
Suppression in Exhibit 5A.

APPLICANT:  
Ericsson Radio System AB

EXHIBIT 6  
Page 6.46

FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS ANALOG MODE

---

2.1053

Field Strength of Spurious Radiation

Ref. 2.1053 field strength of spurious  
emissions was measured on our 3 meter range.  
The measurement procedure is per EIA/IS-138.

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MACRO ANALOG MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

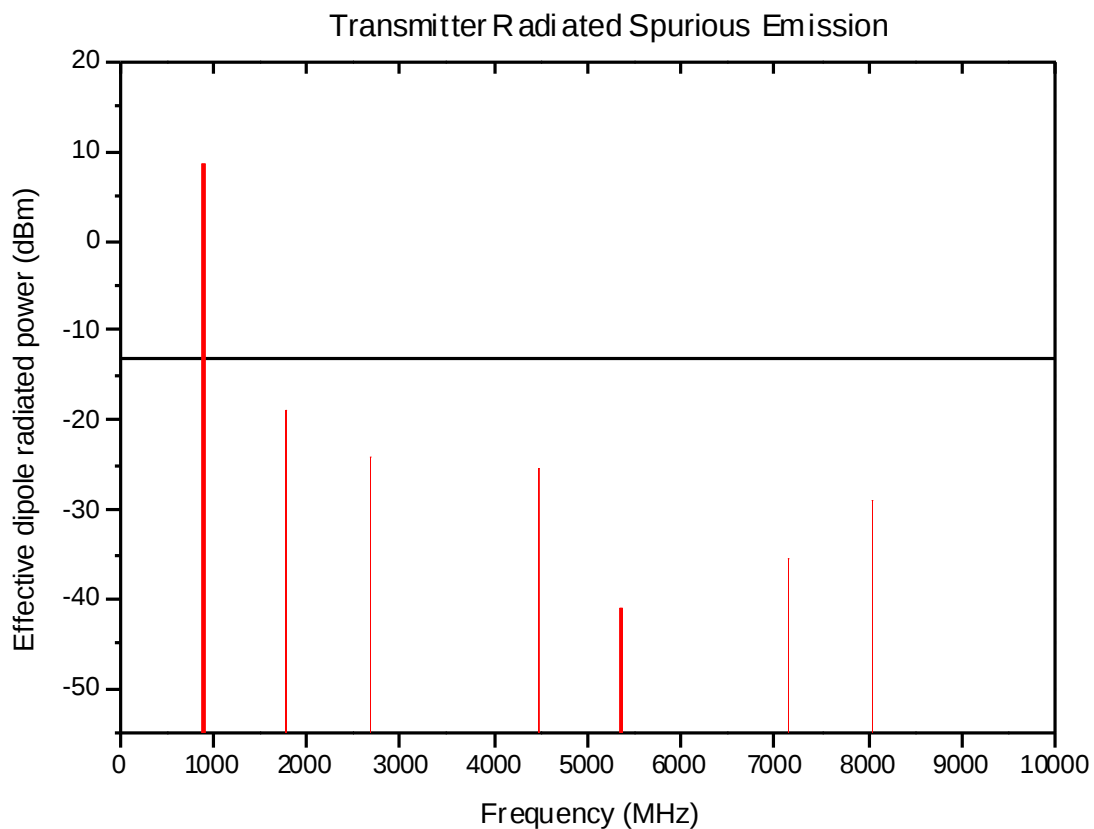

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MACRO ANALOG MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

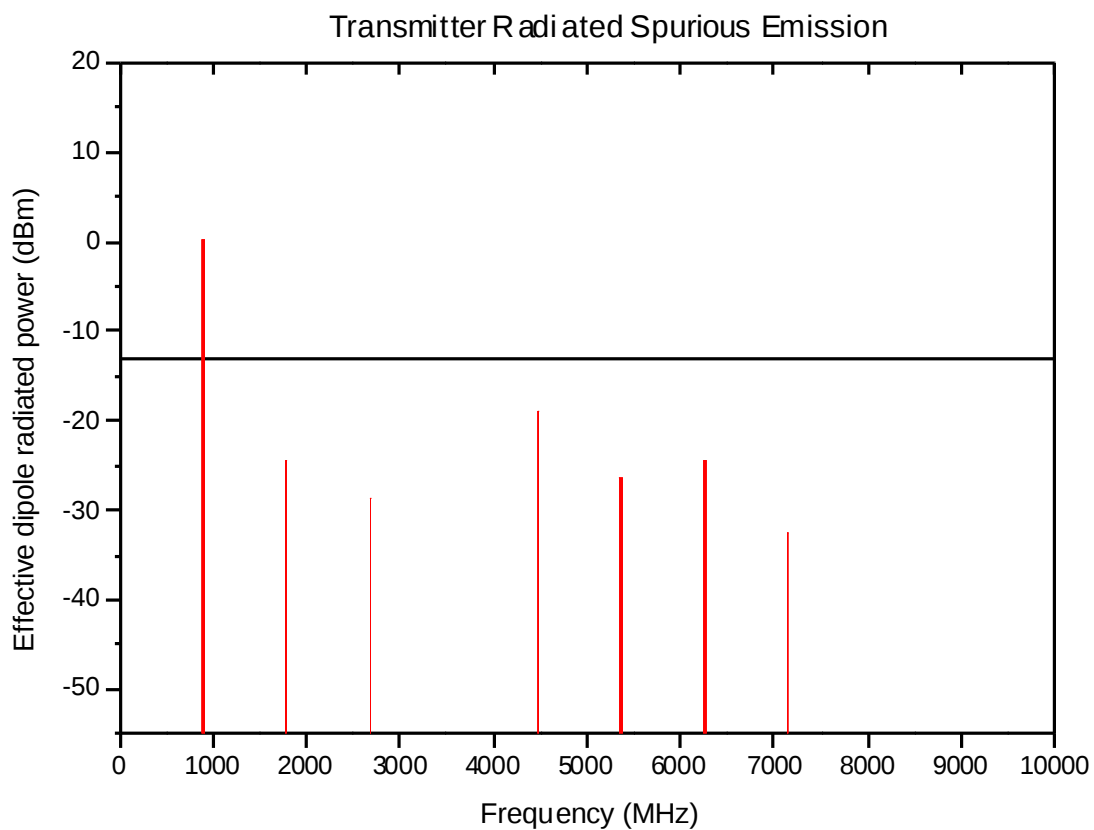

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MACRO DIGITAL MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

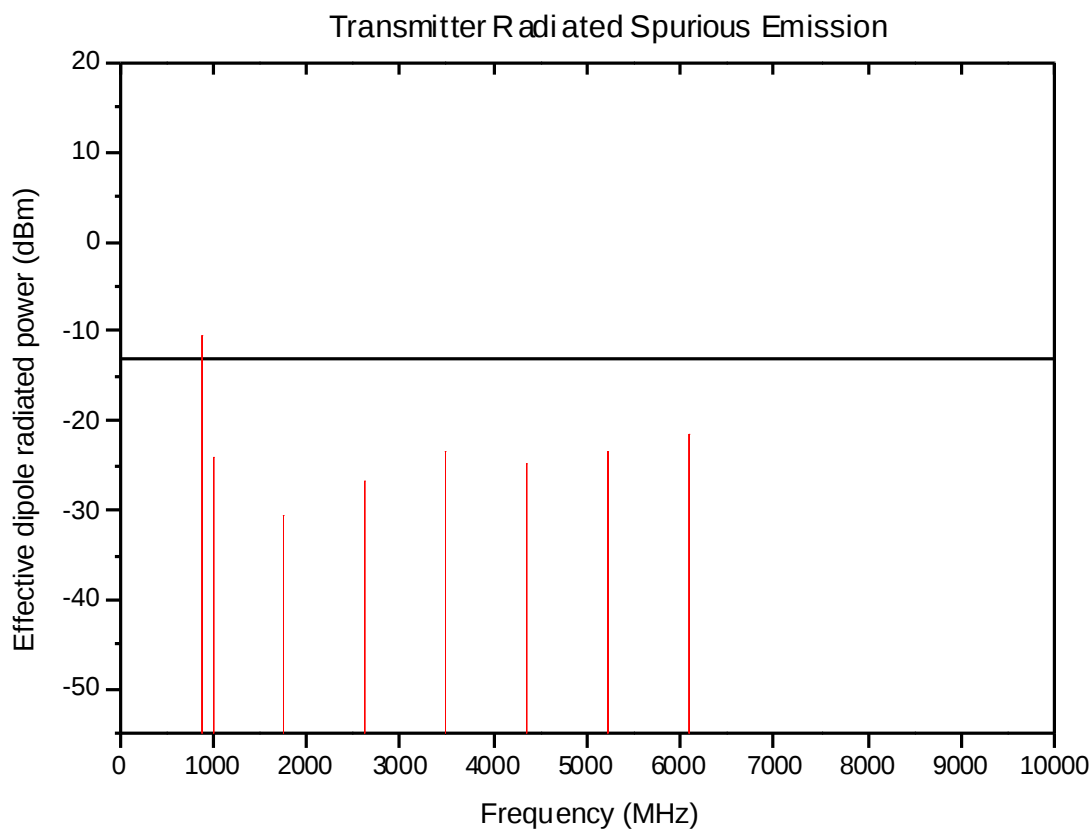

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MACRO DIGITAL MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

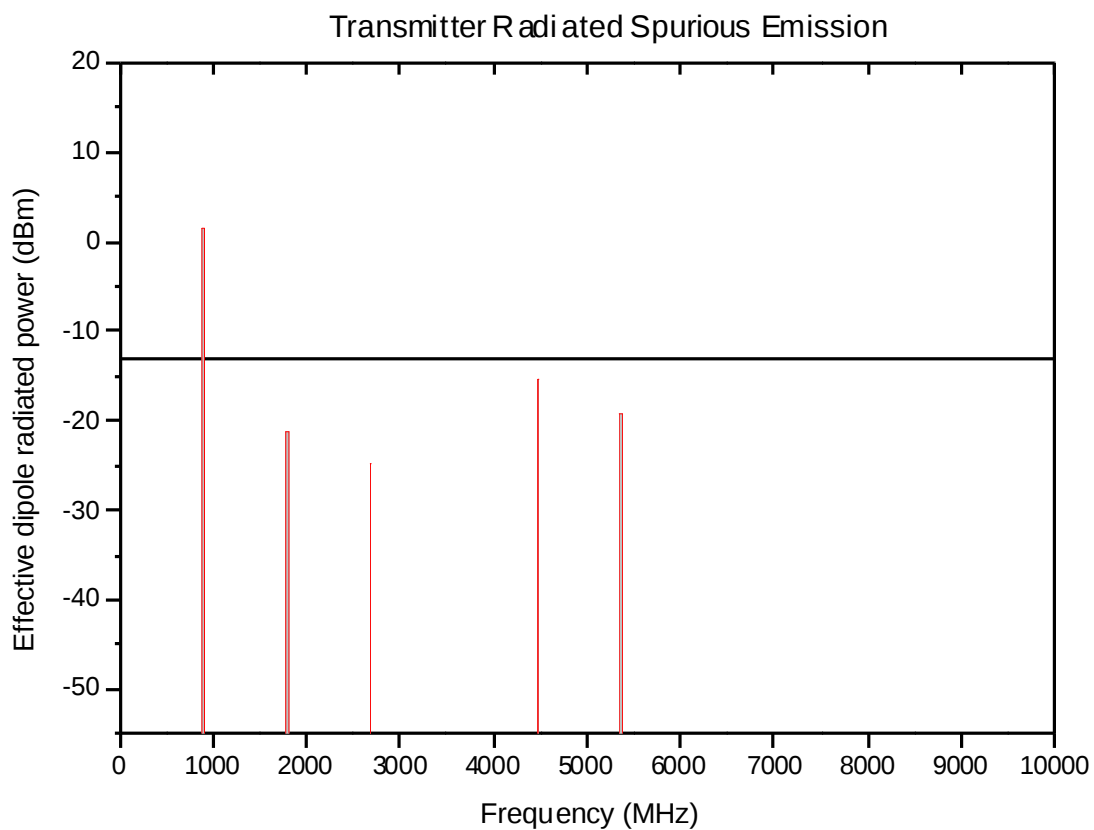

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS CASSETTE ANALOG MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

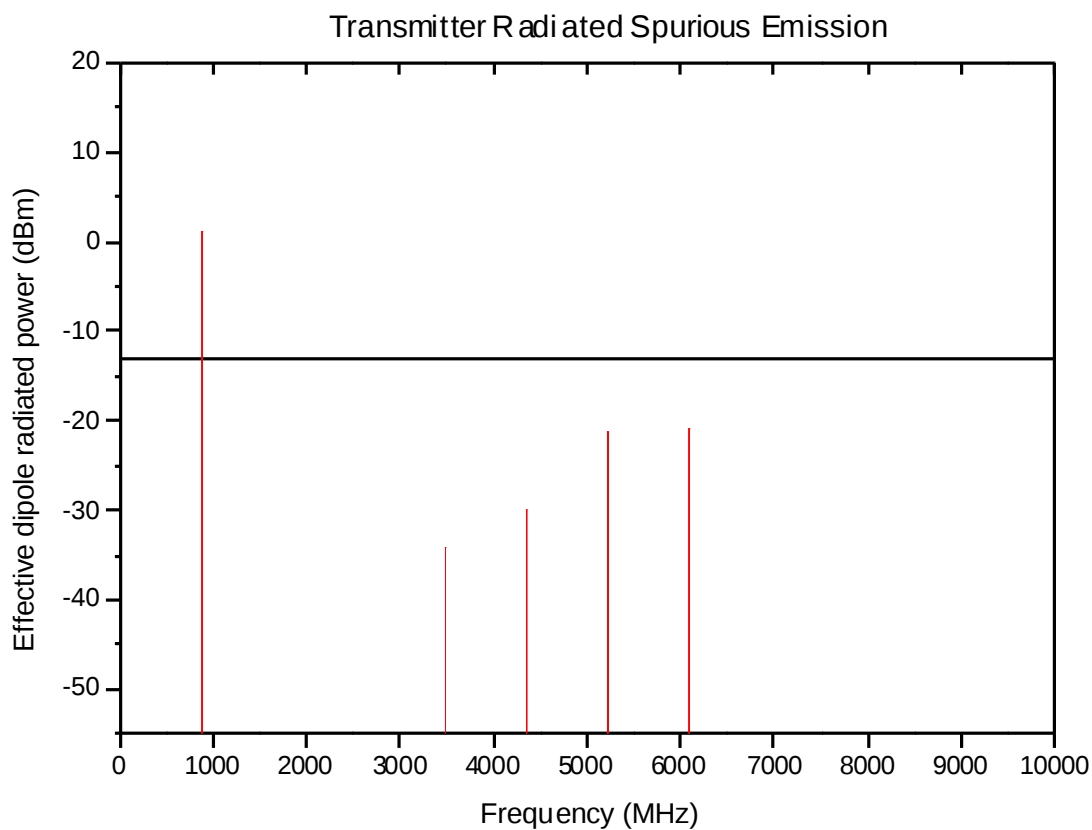

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS CASSETTE ANALOG MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

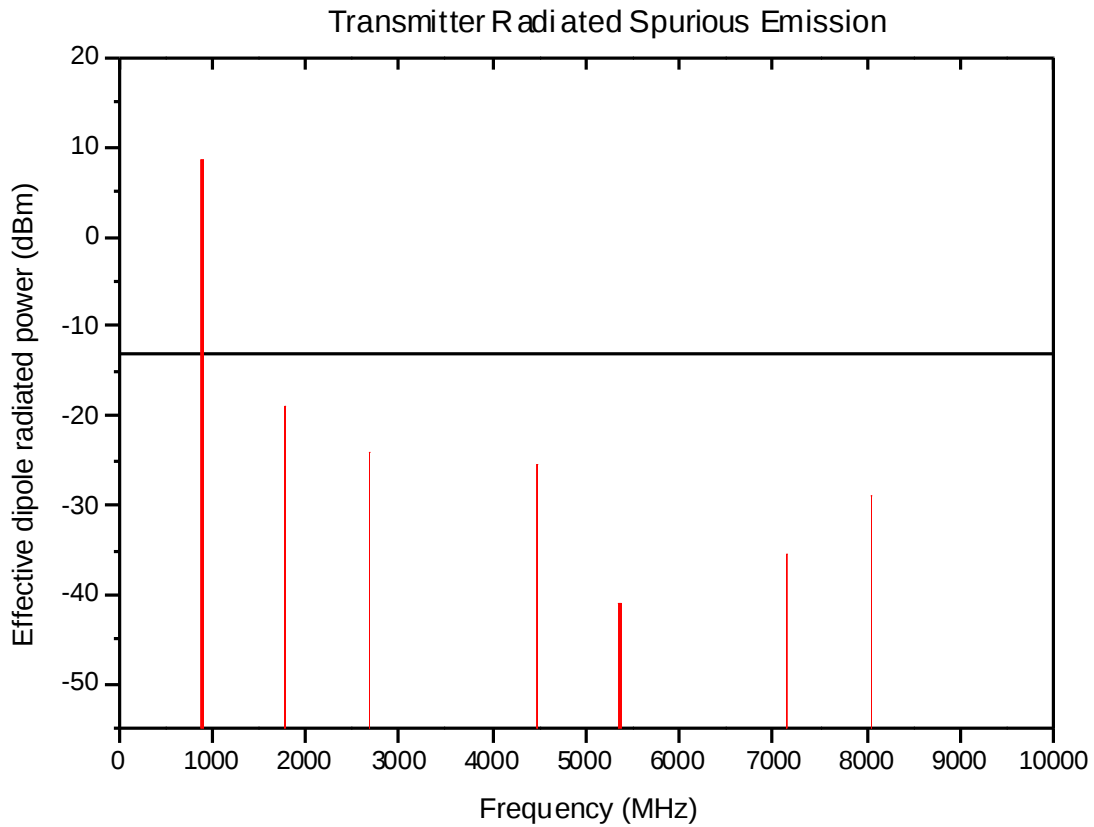

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS CASSETTE DIGITAL MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

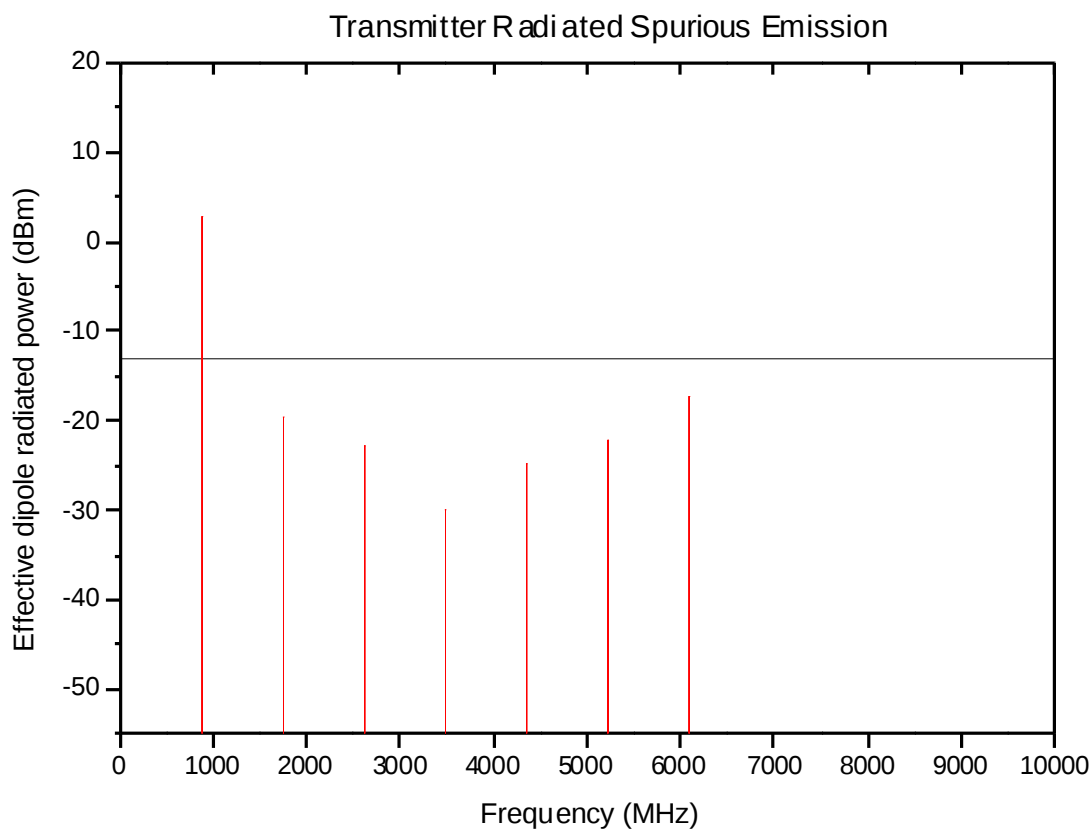

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS DIGITAL MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

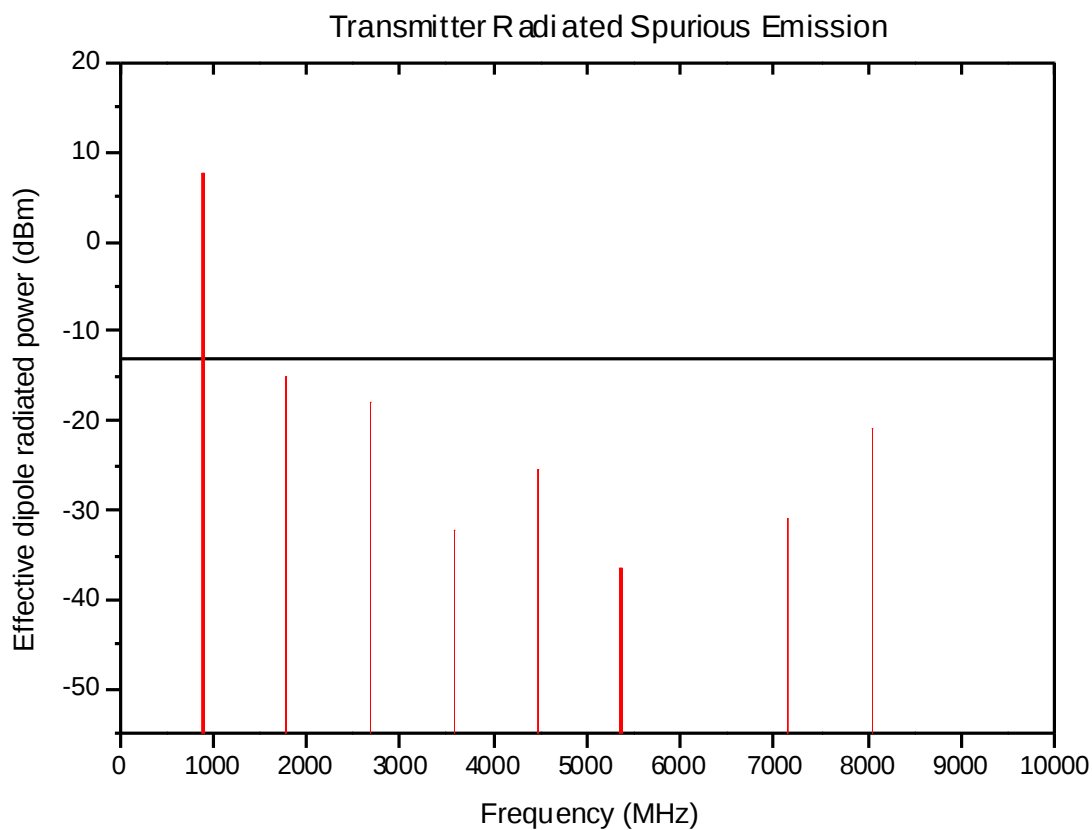

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 48.6 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MINIMDBS DATA PACKET MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

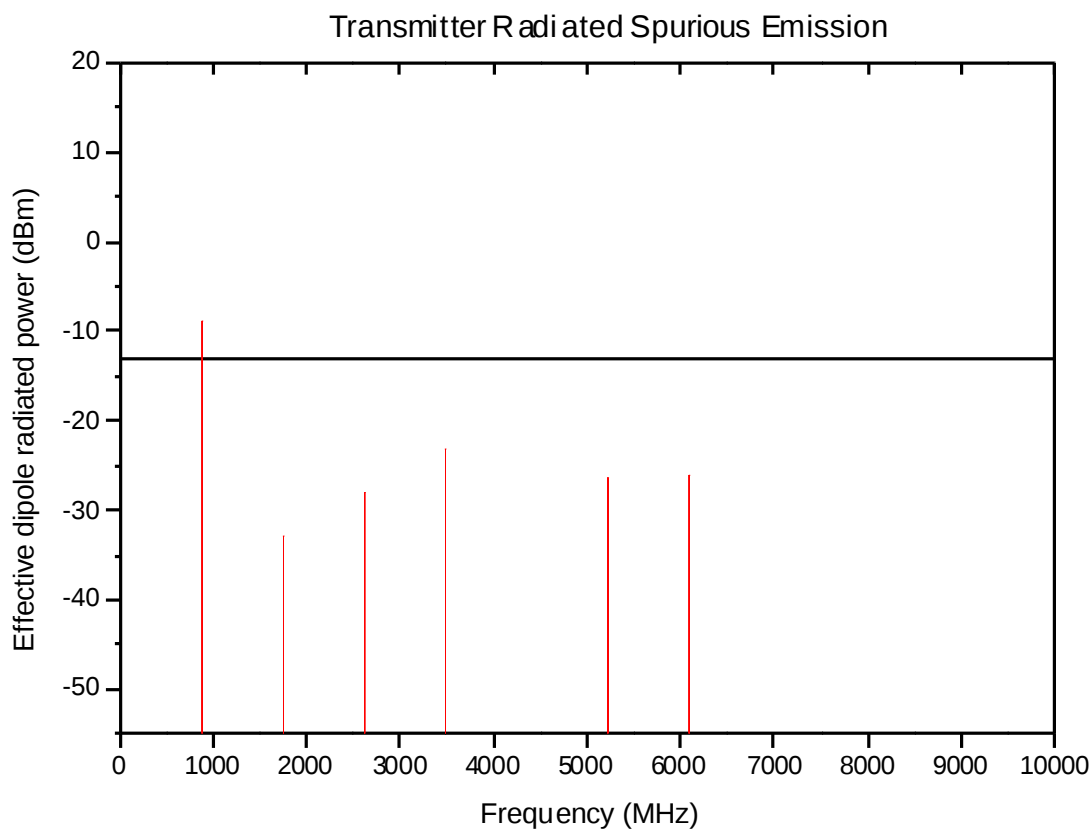

Rated Power Output = 57.0 Watt  
Channel 991 / Carrier frequency = 869.04 MHz  
Modulated with 19.2 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB


FCC ID NO.  
B5KKRC12104-41

RADIATED SPURIOUS EMISSIONS MINIMDBS DATA PACKET MODE

---

---

Radiated Spurious Emission  
Measured Per TIA/IS-136/IS-138

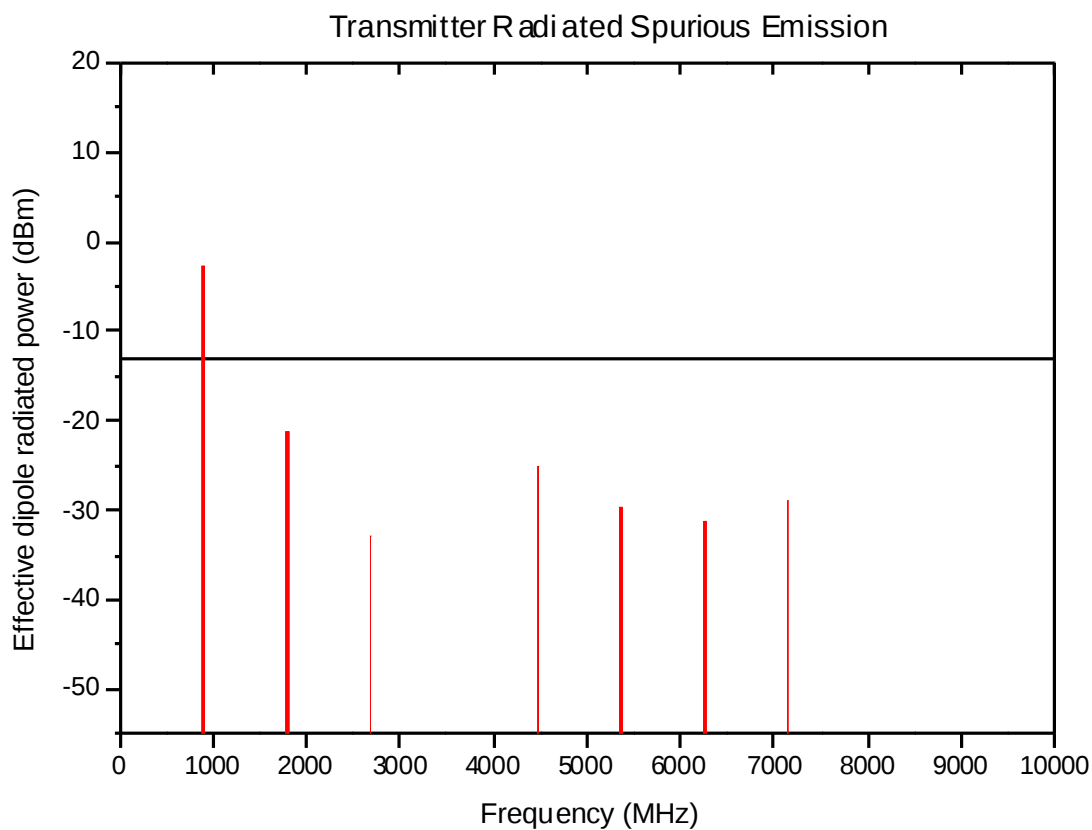

Rated Power Output = 57.0 Watt  
Channel 799 / Carrier frequency = 893.97 MHz  
Modulated with 19.2 kbs PSEUDORANDOM DATA

APPLICANT:  
Ericsson Radio System AB

EXHIBIT 6  
Page 6.57

FCC ID NO.  
B5KKRC12104-41

## FREQUENCY STABILITY MACRO WITH CRI

---

### 2.1055 (a,b,d) Output Frequency

Variation of output frequency as a result of either temperature or voltage variation is reported in the graphs on the following pages. The measurements were made per TIA/IS-136/IS-138.

#### Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

#### SATT Stand Alone Test Tool

MB Teknik Walk-in temperature chamber with  
Internal calibrated temperature control.

The R&S ESI 40 was hooked up to a external  
10 MHz reference standard during the  
measurements.


The SATT (Stand Alone Test Tool) was hooked  
up to a 10 MHz reference standard from a  
HP89441 Vector Signal Analyzer during the  
measurements.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY MACRO WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

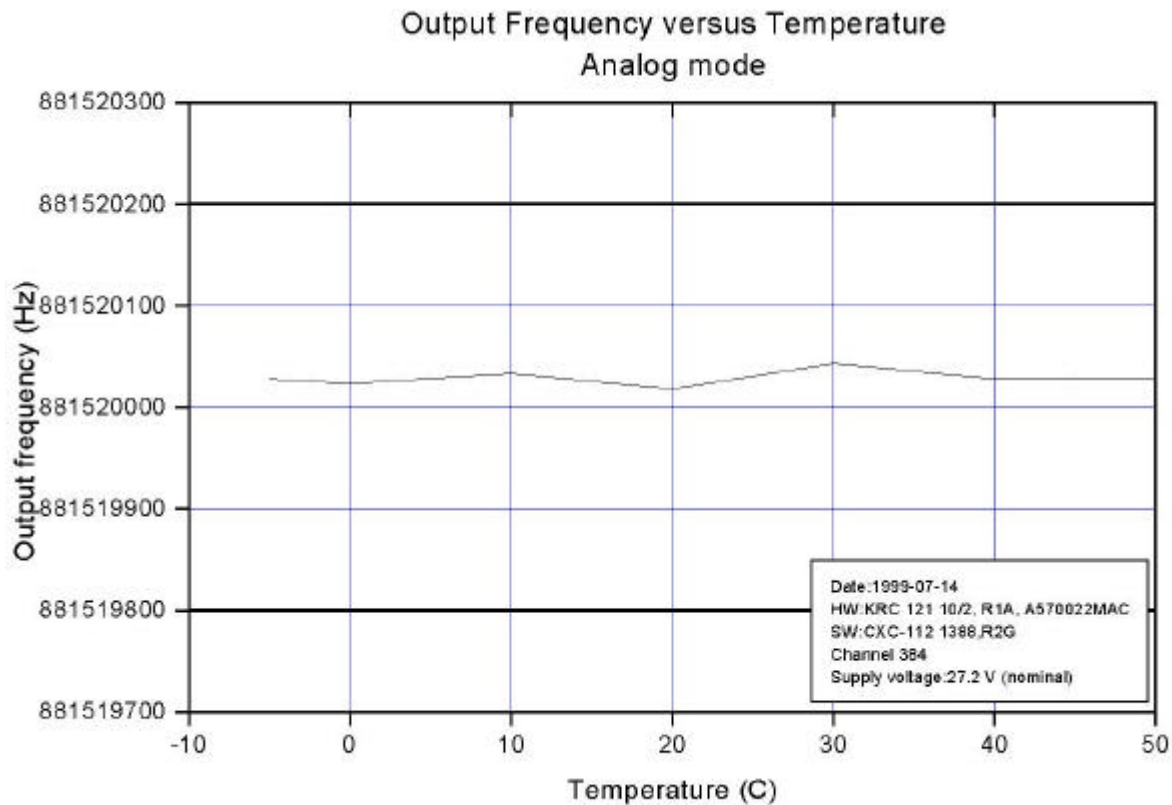


Channel 384 Output Power 47.6 dBm  
Supply Voltage:27.2 V (nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY MACRO WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

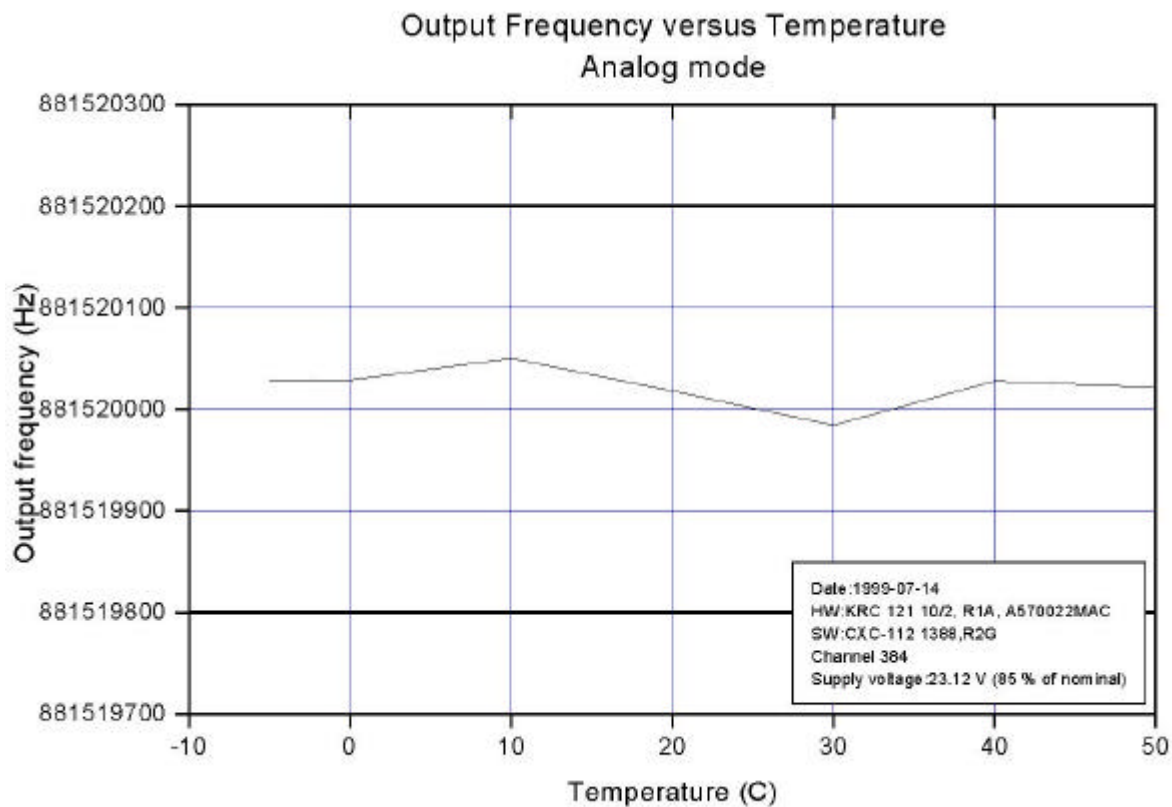


Channel 384 Output Power 47.6 dBm  
Supply Voltage:23.12 V (85% of nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY MACRO WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

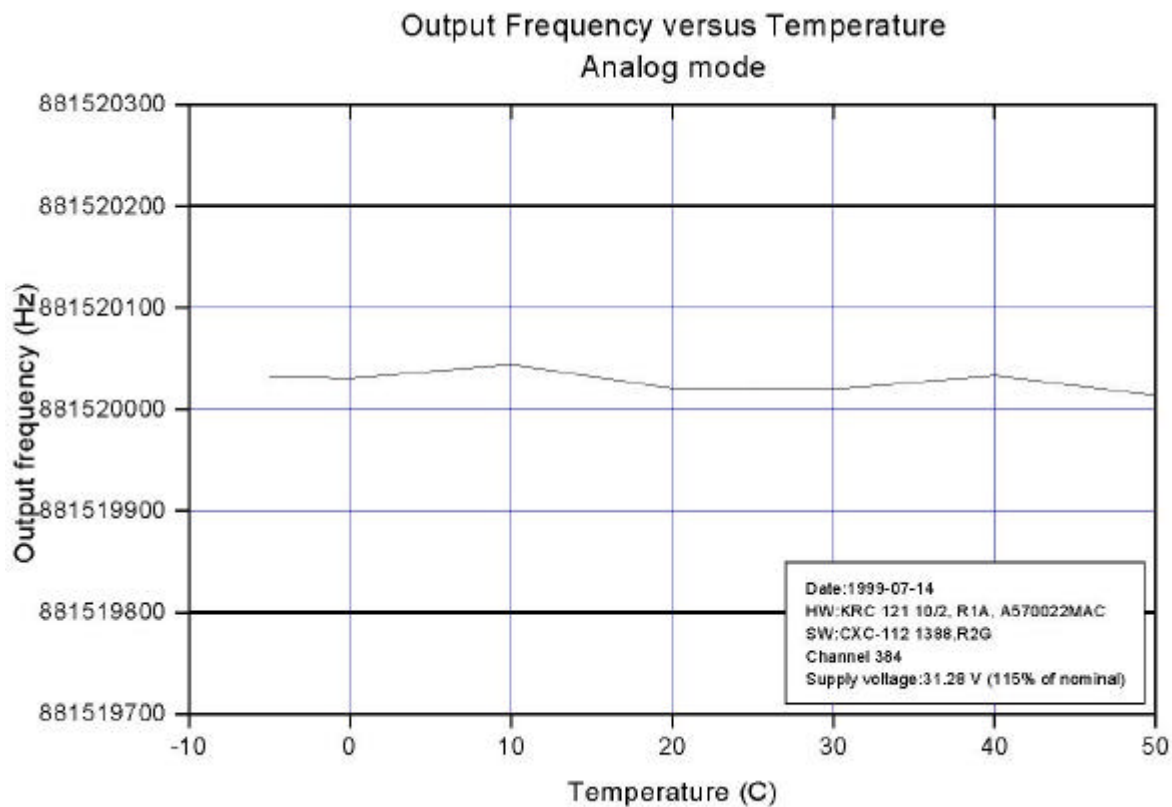


Channel 384 Output Power 47.6 dBm  
Supply Voltage:31.28 V (115% of nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY CASSETTE WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

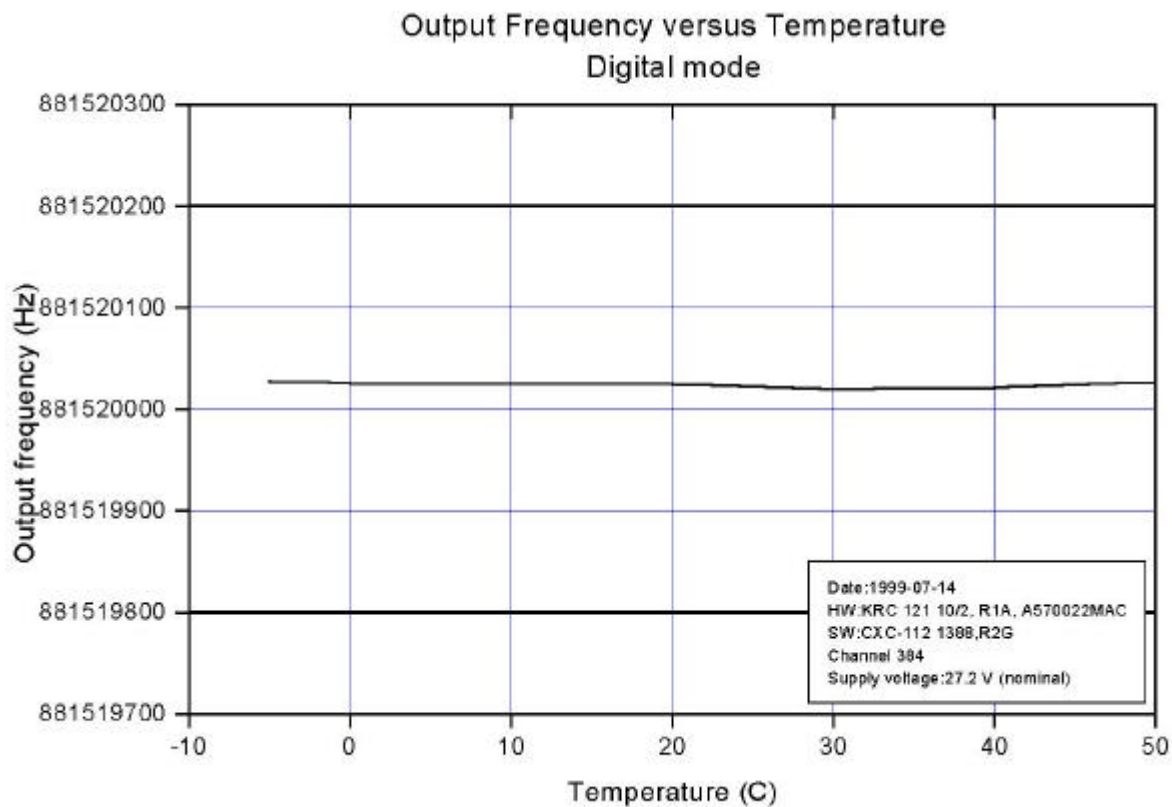


Channel 384      Output Power 47.6 dBm  
Supply Voltage:27.2 V (nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY CASSETTE WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

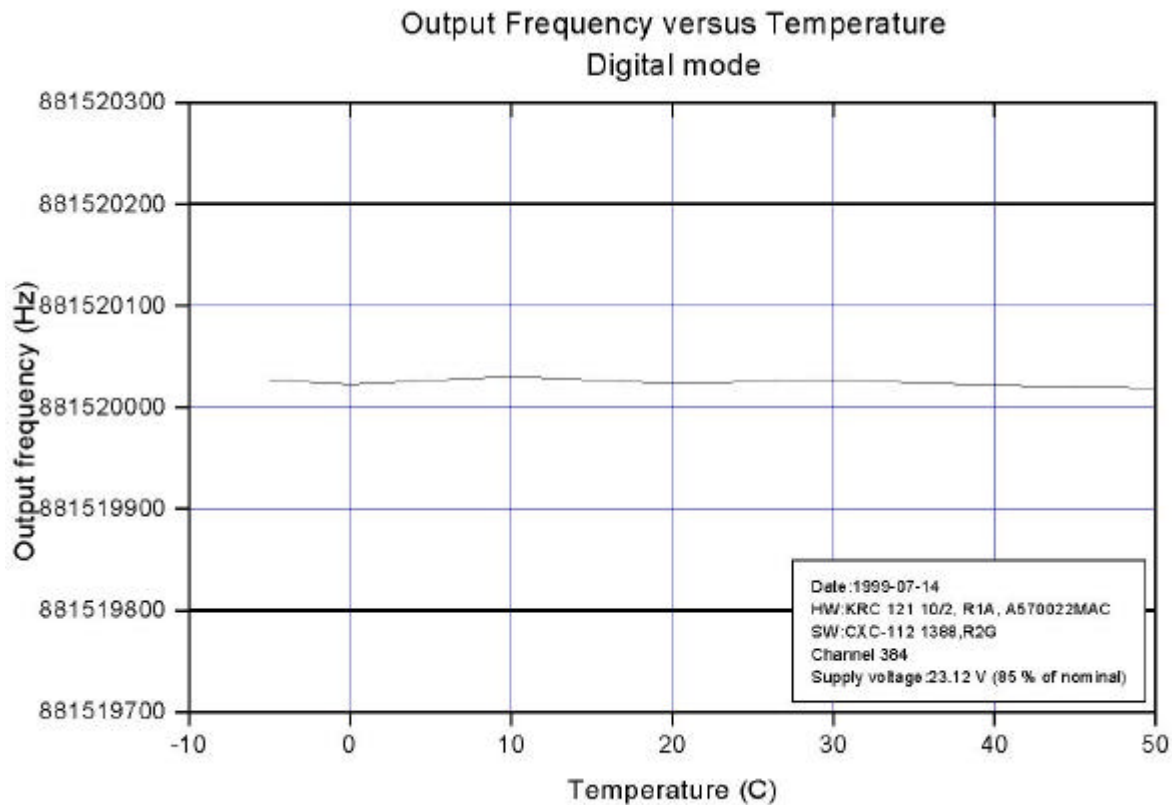


Channel 384      Output Power 47.6 dBm  
Supply Voltage: 23.12 V (85% of nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY CASSETTE WITH CRI

2.1055 (a,b,d) Output Frequency versus Temperature

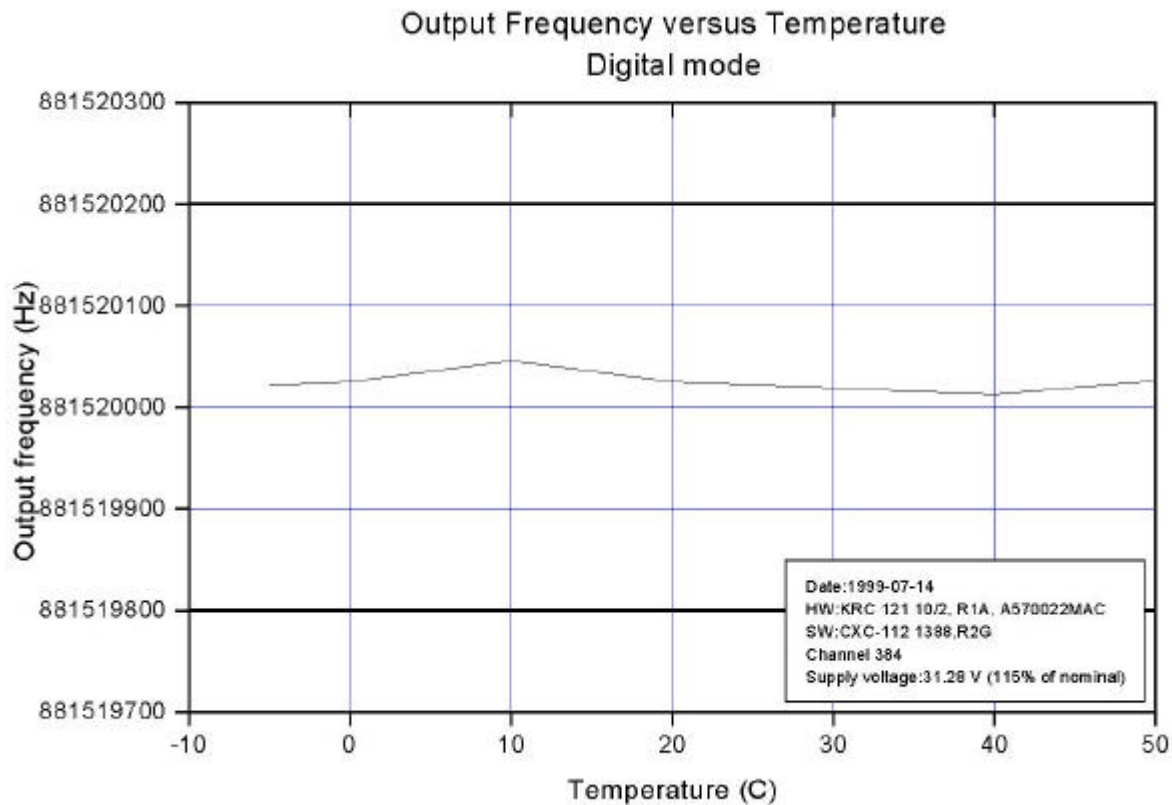

Channel 384      Output Power 47.6 dBm  
Supply Voltage:31.28 V (115% of nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY DATA PACKET MODE

---

2.1055 (a,b,d) Output Frequency

Variation of output frequency as a result of temperature and voltage variation is reported in the graphs on the following pages. The measurements were made per TIA/IS-136/IS-138.

Equipment used:

Rohde & Schwarz ESI 40, EMI Test Receiver  
Including:  
Spectrum Analyzer, 20 Hz-40 GHz  
EMI Receiver, 20 Hz-40 GHz  
Option FSE-B7 Signal Vector Analysis

Personal Computer with serial link


MB Teknik Walk-in temperature chamber with  
Internal calibrated temperature control.

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY DATA PACKET MODE

2.1055 (a,b,d) Output Frequency versus Temperature

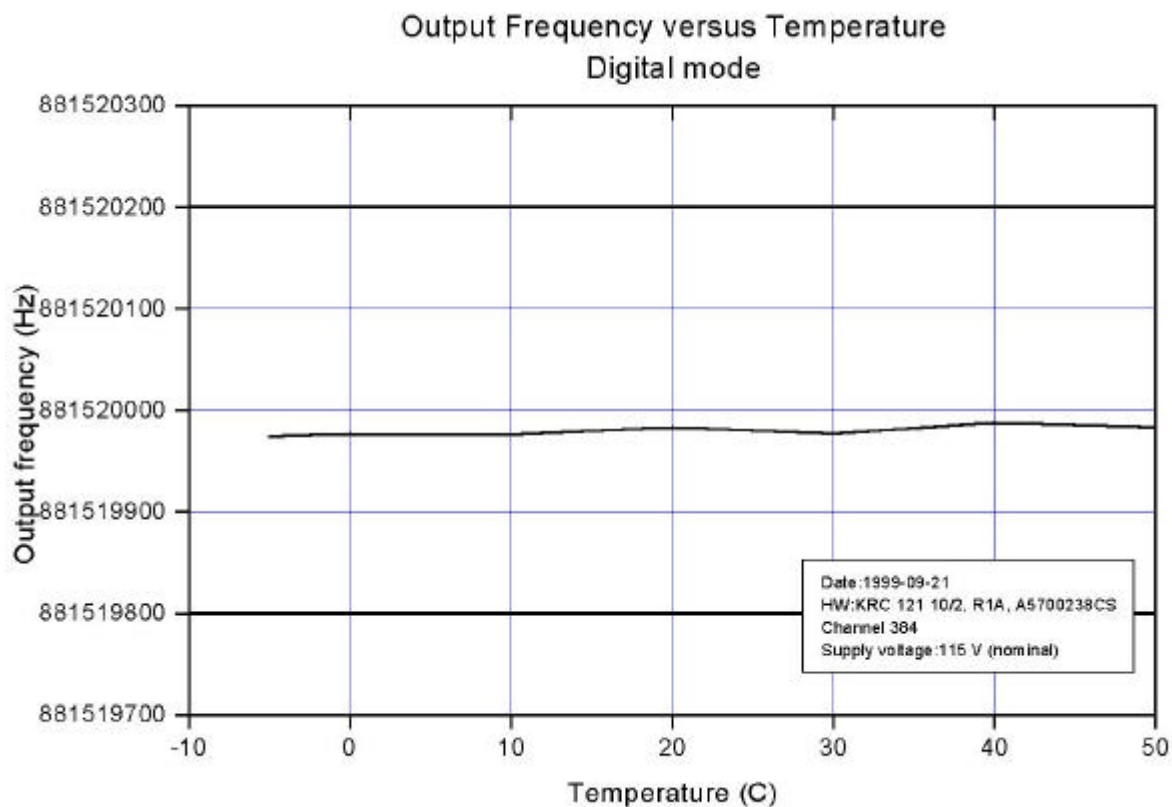


Channel 384 Output Power 47.6 dBm  
Supply Voltage: 115 V (nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY DATA PACKET MODE

2.1055 Output Frequency versus Temperature

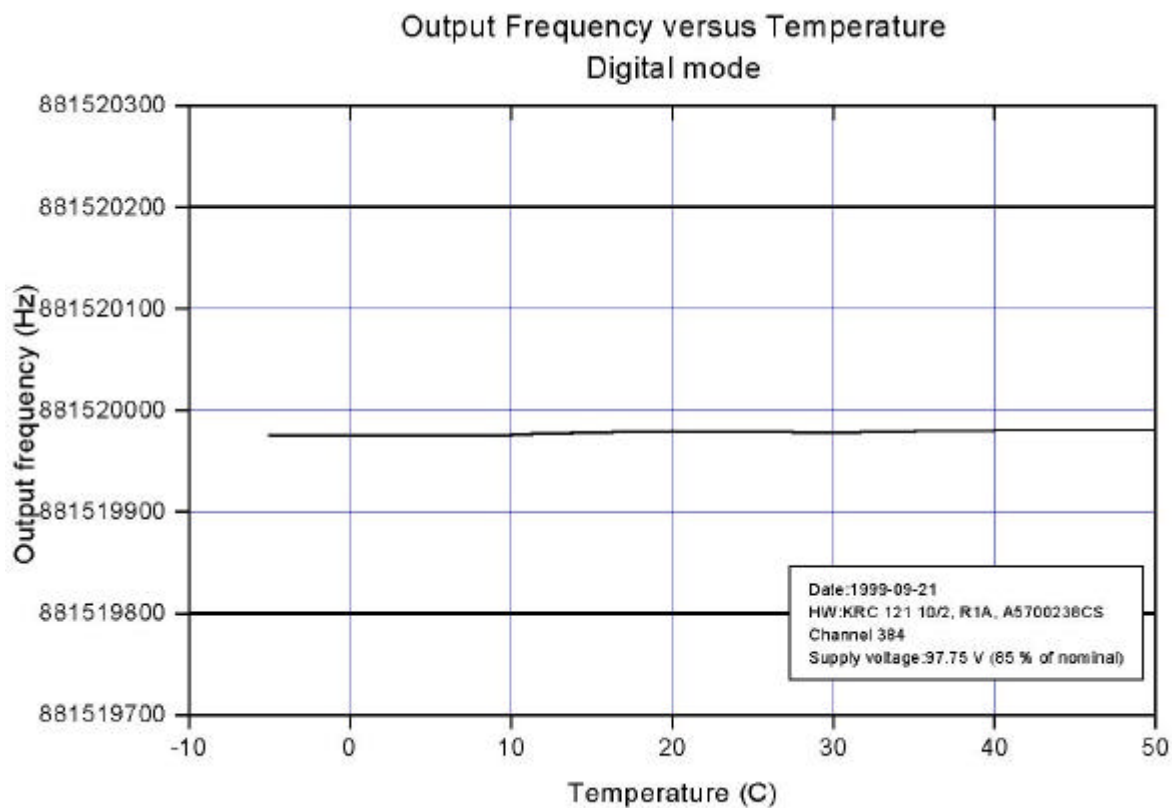


Channel 384 Output Power 47.6 dBm  
Supply Voltage:97.75 V (85% of nominal)

APPLICANT:  
Ericsson Radio System AB

FCC ID NO.  
B5KKRC12104-41

FREQUENCY STABILITY DATA PACKET MODE

2.1055 (a,b,d) Output Frequency versus Temperature

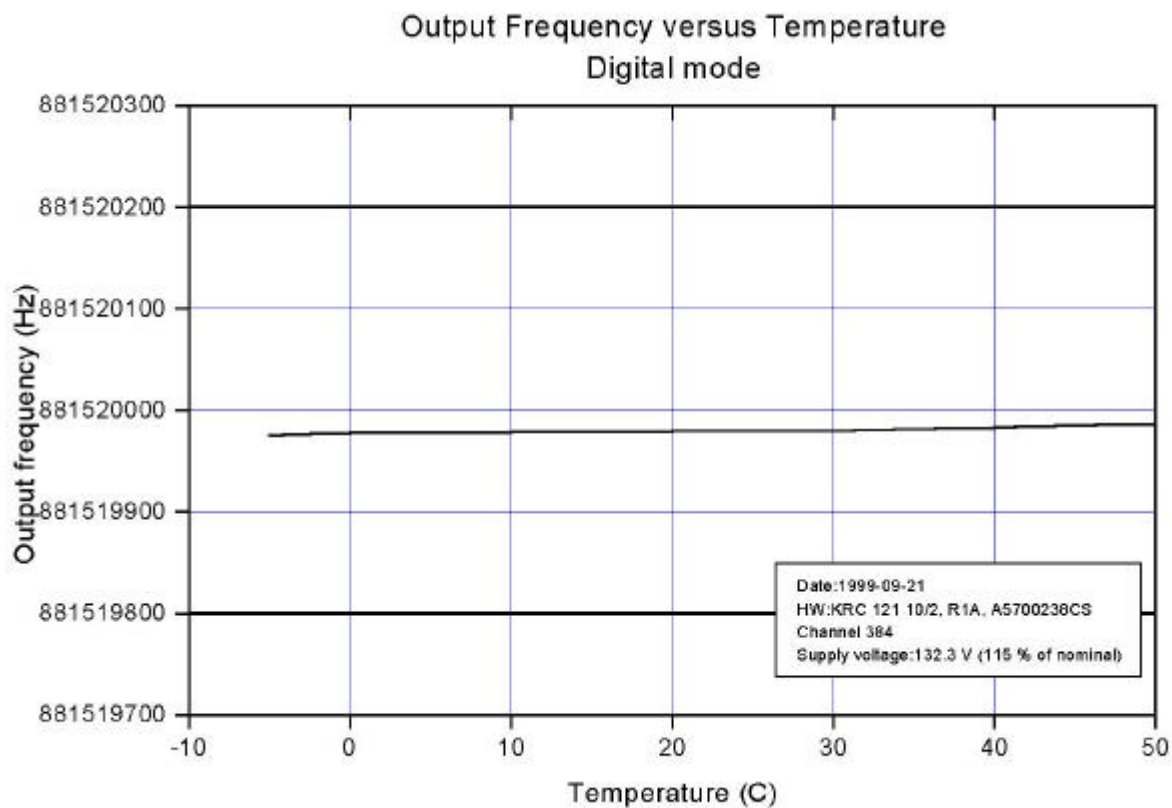

Channel 384 Output Power 47.6 dBm  
Supply Voltage:132.3 V (115% of nominal)