


FCC SAR Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Tablet PC
BRAND NAME : hp
MODEL NAME : HSTNN-C78C
FCC ID : B94HNC78CSWTH
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

The product was testing completed on Dec. 09, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
2.1 Testing Laboratory	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT)	6
3.2 Maximum RF output power among production units	7
3.3 Applied Standard	12
3.4 Device Category and SAR Limits	12
3.5 Test Conditions	12
4. Specific Absorption Rate (SAR)	16
4.1 Introduction	16
4.2 SAR Definition	16
5. SAR Measurement System	17
5.1 E-Field Probe	18
5.2 Data Acquisition Electronics (DAE)	18
5.3 Robot	19
5.4 Measurement Server	19
5.5 Phantom	20
5.6 Device Holder	21
5.7 Data Storage and Evaluation	22
5.8 Test Equipment List	24
6. Tissue Simulating Liquids	25
7. System Verification Procedures	27
7.1 Purpose of System Performance check	27
7.2 System Setup	27
7.3 SAR System Verification Results	28
8. EUT Testing Position	29
9. Measurement Procedures	29
9.1 Spatial Peak SAR Evaluation	29
9.2 Power Reference Measurement	30
9.3 Area & Zoom Scan Procedures	30
9.4 Volume Scan Procedures	31
9.5 SAR Averaged Methods	31
9.6 Power Drift Monitoring	31
10. Conducted RF Output Power (Unit: dBm)	32
11. Antenna Location	58
12. SAR Test Results	60
12.1 Body SAR	60
12.2 Repeated SAR Measurement	65
13. Simultaneous Transmission Analysis	66
13.1 Body Exposure Conditions	67
13.2 SPLSR Evaluation and Analysis	75
14. Uncertainty Assessment	104
15. References	106
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Test Setup Photos	



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hewlett-Packard Company Tablet PC, HSTNN-C78C** are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Body	GPRS850	1.47	PCB	1.47
	GPRS1900	1.46		
	WCDMA Band V	1.31		
	WCDMA Band IV	1.41		
	WCDMA Band II	1.40		
	CDMA 2000 BC10	1.05		
	CDMA 2000 BC0	0.98		
	CDMA 2000 BC1	1.20		
	LTE Band 17	1.44		
	LTE Band 13	1.28		
	LTE Band 5	1.45		
	LTE Band 4	1.41		
	LTE Band 2	1.40		
	LTE Band 25	1.36		

<Highest Simultaneous transmission SAR>

Exposure Position	Frequency Band	Equipment Class	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
Body	CDMA BC0	PCB	1.58
	WLAN2.4GHz Band	DTS	

Exposure Position	Frequency Band	Equipment Class	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
Body	CDMA BC1	PCB	1.58
	Bluetooth	DSS	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

2.2 Applicant

Company Name	Hewlett-Packard Company
Address	3000 Hanover Street, Palo Alto, California 94304, USA

2.3 Manufacturer

Company Name	COMPAL ELECTRONICS, INC.
Address	No.581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan (R.O.C.)

2.4 Application Details

Date of Start during the Test	Oct. 06, 2013
Date of End during the Test	Dec. 09, 2013



3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Tablet PC
Brand Name	hp
Model Name	HSTNN-C78C
FCC ID	B94HNC78CSWTH
Integrated Module	WWAN Module: Brand Name: Sierra Model Name: EM7355 WLAN Module: Brand Name: MITSUMI Model Name: DWM-W095A
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz CDMA 2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 826.5 MHz ~ 846.5 MHz LTE Band 4: 1712.5 MHz ~ 1752.2 MHz LTE Band 2: 1852.5 MHz ~ 1907.5 MHz LTE Band 25: 1852.5 MHz ~ 1912.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402MHz ~ 2480MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> • GPRS/EGPRS • RMC 12.2Kbps Rel 99 • HSDPA Rel 7, Cat14 • HSUPA Rel 6, Cat6 • DC-HSDPA Rel 8 Cat24 • CDMA2000: 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A) • LTE: QPSK, 16QAM • 802.11a/b/g/n HT20/HT40 • Bluetooth v2.1+EDR · Bluetooth v4.0+LE • NFC: ASK
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna
EUT Stage	Identical Prototype
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. This EUT has another variant version with WWAN module removal, and WLAN/Bluetooth SAR assessment was addressed in the Sporton SAR report (report no. FA392719-01 Rev.02) for FCC ID: B94HNC78CBRPR. The WLAN/Bluetooth module and the antenna is exactly identical between 2 versions, and the WLAN/Bluetooth antenna is >5cm away from WWAN antenna, the WLAN/Bluetooth SAR test results in the B94HNC78CBRPR SAR report is representative of WLAN/Bluetooth SAR performance in this EUT and will be submitted in this application.	



3.2 Maximum RF output power among production units

Mode / Band	Burst Average Power (dBm)			
	GSM 850		GSM 1900	
Output Power Status	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode
GPRS (GMSK, 1 Tx slot)	33.5	31	30.5	27.5
GPRS (GMSK, 2 Tx slots)	33	28	30	25
EDGE (8PSK, 1 Tx slot)	28	28	27	27
EDGE (8PSK, 2 Tx slots)	27	27	26	24
EDGE (8PSK, 3 Tx slot)	27	25	26	22
EDGE (8PSK, 4 Tx slots)	27	25	26	22

Mode / Band	Average Power (dBm)					
	WCDMA Band V		WCDMA Band II		WCDMA Band IV	
Output Power Status	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode
RMC 12.2K	24	20	24	18	24	17.5
HSDPA Subtest-1	24	20	24	18	24	17.5
DC-HSDPA Subtest-1	24	20	24	18	24	17.5
HSUPA Subtest-5	24	20	24	18	24	17.5

Mode / Band	Average Power (dBm)					
	CDMA BC10		CDMA BC0		CDMA BC1	
Output Power Status	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode	Full Power Mode	Reduced Power Mode
1xRTT RC1 SO55	24.5	19.5	24.5	19.5	24.5	17.5
1xRTT RC3 SO55	24.5	19.5	24.5	19.5	24.5	17.5
1xEV-DO Rev 0	24.5	19.5	24.5	19.5	24.5	17.5
1xEV-DO Rev A	24.5	19.5	24.5	19.5	24.5	17.5

LTE Band 17						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24	0	22
QPSK	10	> 12	1	23	0	22
16QAM	10	≤ 12	1	23	0	22
16QAM	10	> 12	2	22	0	22
QPSK	5	≤ 8	0	24	0	22
QPSK	5	> 8	1	23	0	22
16QAM	5	≤ 8	1	23	0	22
16QAM	5	> 8	2	22	0	22



LTE Band 13						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24	0	20
QPSK	10	> 12	1	23	0	20
16QAM	10	≤ 12	1	23	0	20
16QAM	10	> 12	2	22	0	20
QPSK	5	≤ 8	0	24	0	20
QPSK	5	> 8	1	23	0	20
16QAM	5	≤ 8	1	23	0	20
16QAM	5	> 8	2	22	0	20

LTE Band 5						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	10	≤ 12	0	24	0	21
QPSK	10	> 12	1	23	0	21
16QAM	10	≤ 12	1	23	0	21
16QAM	10	> 12	2	22	0	21
QPSK	5	≤ 8	0	24	0	21
QPSK	5	> 8	1	23	0	21
16QAM	5	≤ 8	1	23	0	21
16QAM	5	> 8	2	22	0	21

LTE Band 4						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24	0	17.5
QPSK	20	> 18	1	23	0	17.5
16QAM	20	≤ 18	1	23	0	17.5
16QAM	20	> 18	2	22	0	17.5
QPSK	15	≤ 16	0	24	0	17.5
QPSK	15	> 16	1	23	0	17.5
16QAM	15	≤ 16	1	23	0	17.5
16QAM	15	> 16	2	22	0	17.5
QPSK	10	≤ 12	0	24	0	17.5
QPSK	10	> 12	1	23	0	17.5
16QAM	10	≤ 12	1	23	0	17.5
16QAM	10	> 12	2	22	0	17.5
QPSK	5	≤ 8	0	24	0	17.5
QPSK	5	> 8	1	23	0	17.5
16QAM	5	≤ 8	1	23	0	17.5
16QAM	5	> 8	2	22	0	17.5



LTE Band 2						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24	0	19
QPSK	20	> 18	1	23	0	19
16QAM	20	≤ 18	1	23	0	19
16QAM	20	> 18	2	22	0	19
QPSK	15	≤ 16	0	24	0	19
QPSK	15	> 16	1	23	0	19
16QAM	15	≤ 16	1	23	0	19
16QAM	15	> 16	2	22	0	19
QPSK	10	≤ 12	0	24	0	19
QPSK	10	> 12	1	23	0	19
16QAM	10	≤ 12	1	23	0	19
16QAM	10	> 12	2	22	0	19
QPSK	5	≤ 8	0	24	0	19
QPSK	5	> 8	1	23	0	19
16QAM	5	≤ 8	1	23	0	19
16QAM	5	> 8	2	22	0	19

LTE Band 25						
Modulation	BW (MHz)	RB size	Full Power Mode		Reduced Power Mode	
			MPR	Average Power (dBm)	MPR	Average Power (dBm)
QPSK	20	≤ 18	0	24	0	19
QPSK	20	> 18	1	23	0	19
16QAM	20	≤ 18	1	23	0	19
16QAM	20	> 18	2	22	0	19
QPSK	15	≤ 16	0	24	0	19
QPSK	15	> 16	1	23	0	19
16QAM	15	≤ 16	1	23	0	19
16QAM	15	> 16	2	22	0	19
QPSK	10	≤ 12	0	24	0	19
QPSK	10	> 12	1	23	0	19
16QAM	10	≤ 12	1	23	0	19
16QAM	10	> 12	2	22	0	19
QPSK	5	≤ 8	0	24	0	19
QPSK	5	> 8	1	23	0	19
16QAM	5	≤ 8	1	23	0	19
16QAM	5	> 8	2	22	0	19



The table below summarized necessary items addressed in KDB 941225 D05 v02r03.

FCC ID	B94HNC78CSWTH							
EUT	Tablet PC							
Operating Frequency Range of each LTE transmission band	LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz							
Channel Bandwidth	LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 5: 5MHz, 10MHz LTE Band 4: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 2: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25: 5MHz, 10MHz, 15MHz, 20MHz							
Transmission (H, M, L) channel numbers and frequencies in each LTE band								
Band 17								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Channel #	Frequency (MHz)		Channel #	Frequency (MHz)			
L	23755	706.5		23780	709			
M	23790	710		23790	710			
H	23825	713.5		23800	711			
Band 13								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Channel #	Frequency (MHz)		Channel #	Frequency (MHz)			
L	23205	779.5		23230	782			
M	23230	782						
H	23255	784.5						
LTE Band 5								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)			
L	20425	826.5		20450	829			
M	20525	836.5		20525	836.5			
H	20625	846.5		20600	844			
LTE Band 4								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880
H	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26365	1882.5	26365	1882.5	26365	1882.5	26365	1882.5
H	26665	1912.5	26640	1910	26615	1907.5	26590	1905



E category, uplink modulations used	Category 3, QPSK, and 16QAM																																						
LTE transmitter and antenna implementation (standalone or sharing hardware components / antennas)	A primary antenna is used for LTE and other wireless interfaces (GSM/CDMA/WCDMA) for transmitting and receiving. LTE and other wireless interfaces (GSM/CDMA/WCDMA) share the same antenna, and cannot transmit simultaneously A 2 nd antenna is used for LTE and other wireless interfaces (GSM/CDMA/WCDMA) for receiving only																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	<p>Yes, per 3GPP TS 36.101 v11.0.0</p> <p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing.																																						
Base station simulator used for Testing	Anritsu MT8820C																																						
Power reduction applied to satisfy SAR compliance	Yes, proximity sensor triggered power reduction implemented on the host.																																						



3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r02
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.



Target Power reduction applied for each wireless mode and orientation

Exposure Position / wireless mode	Bottom Face ⁽¹⁾	Edge 1 ⁽¹⁾	Edge 2	Edge 3	Edge 4
GSM850 GPRS (GMSK 1 Tx slot)	2.5 dB	2.5 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 2 Tx slots)	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 1 Tx slot)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 2 Tx slots)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 3 Tx slots)	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 4 Tx slots)	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 1 Tx slot)	3.0 dB	3.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 2 Tx slots)	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 1 Tx slot)	0.0 dB	0.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 2 Tx slots)	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 3 Tx slots)	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 4 Tx slots)	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
WCDMA Band V	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
WCDMA Band IV	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
WCDMA Band II	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
CDMA2000 BC10	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
CDMA2000 BC0	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
CDMA2000 BC1	7.0 dB	7.0 dB	0 dB	0 dB	0 dB
LTE Band 17	2.0 dB	2.0 dB	0 dB	0 dB	0 dB
LTE Band 13	4.0 dB	4.0 dB	0 dB	0 dB	0 dB
LTE Band 5	3.0 dB	3.0 dB	0 dB	0 dB	0 dB
LTE Band 4	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
LTE Band 2	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
LTE Band 25	5.0 dB	5.0 dB	0 dB	0 dB	0 dB


Remark:


- 1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.



Measurement on EUT:

Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels
		w/o power back-off	w/ power back-off	(dB)
GSM850 GPRS (GMSK 2 Tx slot)	189	32.16	27.82	4.34
GSM1900 GPRS (GMSK 2 Tx slot)	661	29.38	24.43	4.95
WCDMA Band V (RMC 12.2Kbps)	4182	23.51	19.61	3.90
WCDMA Band IV (RMC 12.2Kbps)	1413	22.69	17.41	5.28
WCDMA Band II (RMC 12.2Kbps)	9400	23.65	17.66	5.99
EVDO BC10 (RTAP 153.6Kbps)	580	23.78	18.98	4.80
EVDO BC0 (RTAP 153.6Kbps)	384	23.73	18.98	4.75
EVDO BC1 (RTAP 153.6Kbps)	600	23.80	17.03	6.77
LTE Band 17	23790	23.87	21.92	1.95
LTE Band 13	23230	23.74	18.80	4.94
LTE Band 5	20525	22.54	20.85	1.69
LTE Band 4	20175	23.79	16.05	7.74
LTE Band 2	18900	22.80	18.94	3.86
LTE Band 25	26365	22.75	18.46	4.29

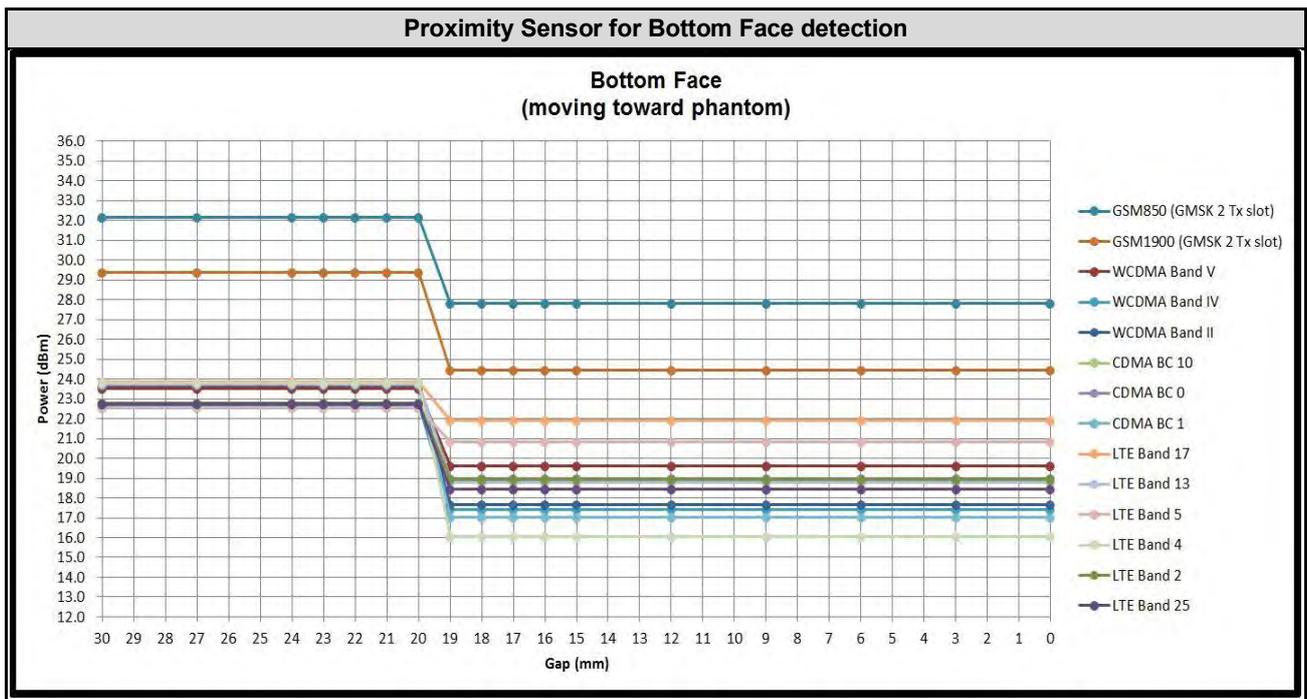

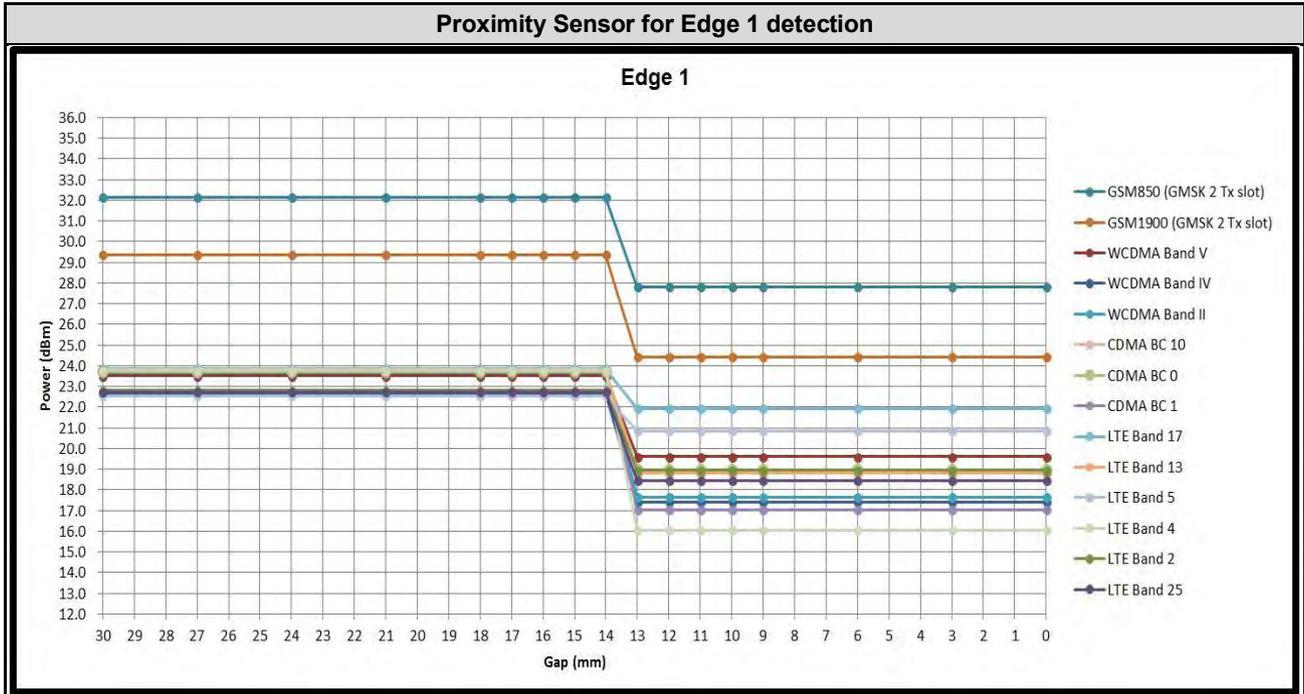

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

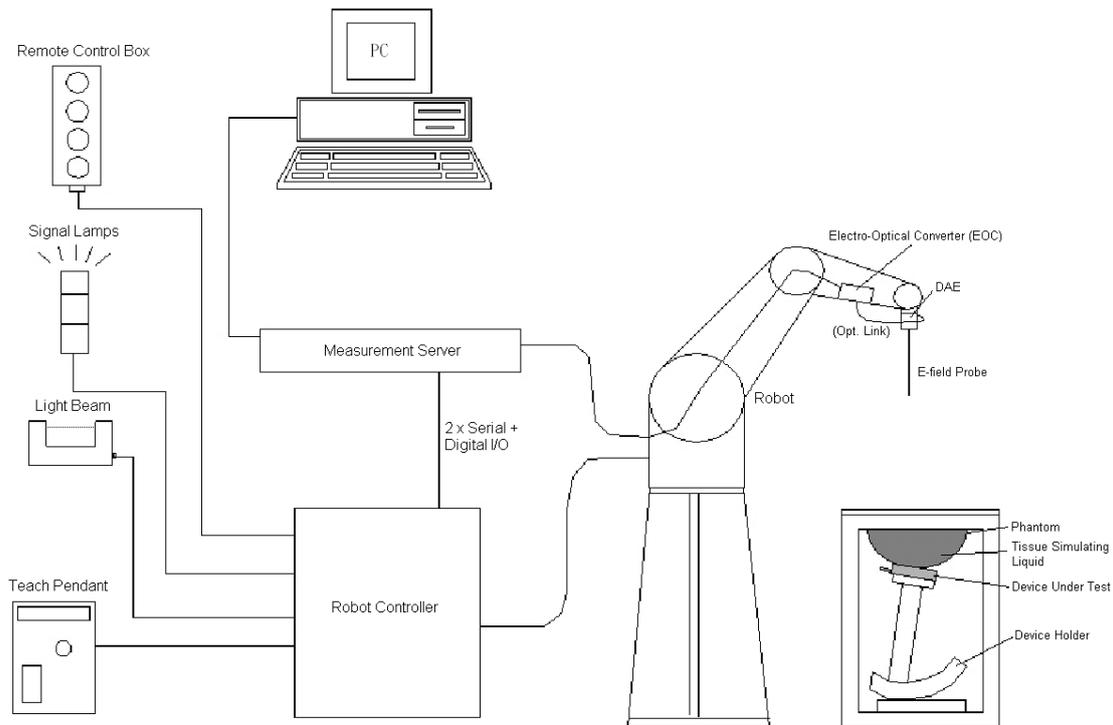


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<ES3DV3 Probe >

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Distance from probe tip to dipole centers: 3 mm



Fig 5.2 Photo of ES3DV3

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY4



Fig 5.5 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.6 Photo of Server for DASY4



Fig 5.7 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Fig 5.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



Fig 5.9 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.10 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

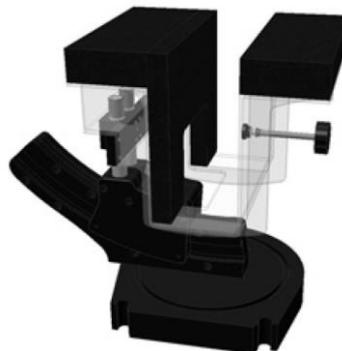


Fig 5.11 Laptop Extension Kit



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2013	May. 27, 2014
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 18, 2013	Mar. 17, 2014
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Jun. 20, 2012	Jun. 19, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 20, 2013	Mar. 19, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 28, 2013	Jan. 27, 2014
SPEAG	Data Acquisition Electronics	DAE3	577	May. 08, 2013	May. 07, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	Jun. 18, 2013	Jun. 17, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 10, 2013	Sep. 09, 2014
Wisewind	Thermometer	HTC-1	TM642	Nov. 13, 2012	Nov. 12, 2013
Wisewind	Thermometer	HTC-1	TM281	Nov. 13, 2012	Nov. 12, 2013
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Dec. 11, 2012	Dec. 10, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 06, 2013	May. 05, 2015
R&S	Radio communication Tester	CMW500	116160	Jan. 09, 2013	Jan. 08, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMF 100A	101107	May. 27, 2013	May. 26, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2013	Feb. 06, 2014
Anritsu	Power Meter	ML2495A	1132003	Aug. 28, 2013	Aug. 27, 2014
Anritsu	Power Sensor	MA2411B	1126017	Aug. 27, 2013	Aug. 26, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
AR	Power Amplifier	5S1G4M2	328767	Note 5	
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D1750V2, SN: 1068 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
6. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

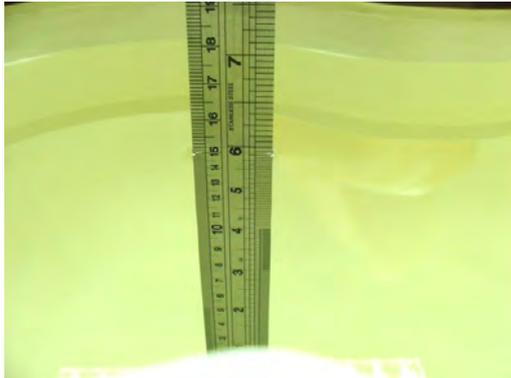


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SPEAG DAK-3.5 Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Body	22.2	0.974	53.292	0.96	55.50	1.46	-3.98	±5	2013/10/9
835	Body	22.5	0.962	54.559	0.97	55.2	-0.82	-1.16	±5	2013/10/6
835	Body	22.6	0.994	56.197	0.97	55.2	2.47	1.81	±5	2013/10/8
835	Body	22.3	0.988	54.880	0.97	55.2	1.86	-0.58	±5	2013/10/10
1750	Body	22.4	1.509	52.010	1.52	53.3	-0.72	-2.42	±5	2013/10/6
1750	Body	22.6	1.491	52.702	1.52	53.3	-1.91	-1.12	±5	2013/10/8
1750	Body	22.3	1.522	53.843	1.52	53.3	0.13	1.02	±5	2013/12/9
1900	Body	22.4	1.557	52.004	1.52	53.30	2.43	-2.43	±5	2013/10/6
1900	Body	22.6	1.534	51.986	1.52	53.3	0.92	-2.47	±5	2013/10/8

Table 6.2 Measuring Results for Simulating Liquid

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

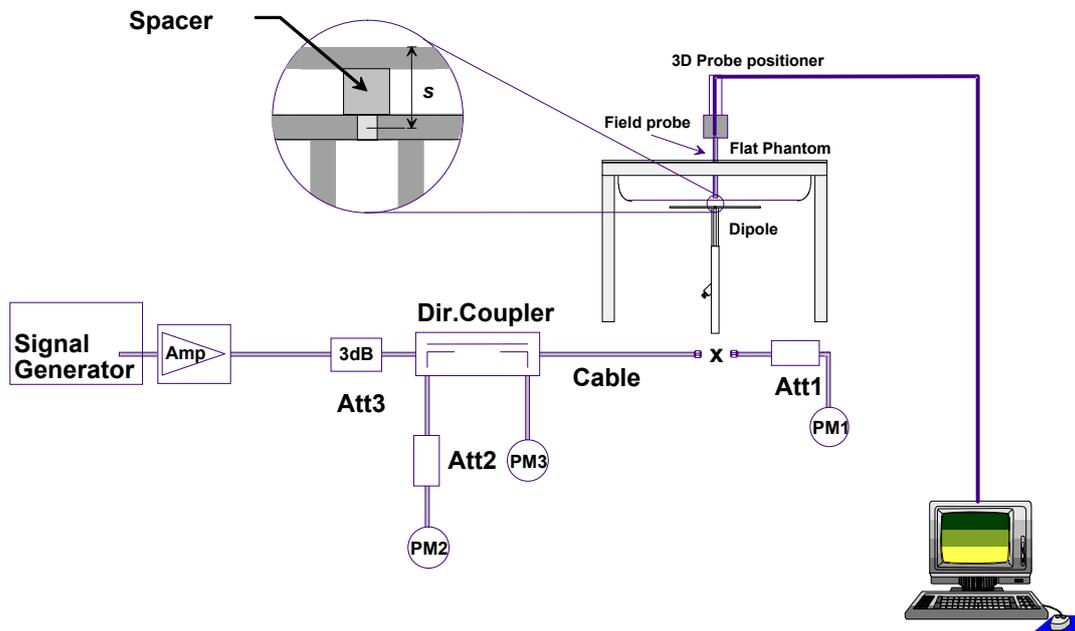


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2013/10/9	750	Body	250	D750V3-SN:1012	3071	1279	2.25	8.83	9	1.93
2013/10/6	835	Body	250	D835V2-SN:499	3071	1279	2.53	9.63	10.12	5.09
2013/10/8	835	Body	250	D835V2-SN:499	3071	1279	2.46	9.63	9.84	2.18
2013/10/10	835	Body	250	D835V2-SN:499	3071	1279	2.45	9.63	9.8	1.77
2013/10/6	1750	Body	250	D1750V2-SN:1068	3071	1279	9.9	36.8	39.6	7.61
2013/10/8	1750	Body	250	D1750V2-SN:1068	3071	1279	8.77	36.8	35.08	-4.67
2013/12/9	1750	Body	250	D1750V2-SN:1068	3931	577	9.82	36.8	39.28	6.74
2013/10/6	1900	Body	250	D1900V2-SN:5d041	3071	1279	11	40.8	44	7.84
2013/10/8	1900	Body	250	D1900V2-SN:5d041	3071	1279	10.9	40.8	43.6	6.86

Table 7.1 Target and Measurement SAR after Normalized



8. EUT Testing Position

Please refer to Appendix D for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r02 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				



9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

- Per KDB 447498 D01v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- According to KDB 941225 D03v01, for Body SAR testing, the EUT operating without power back-off was set in GPRS (2 Tx slots) and the EUT operating with power back-off was set in GPRS (2 Tx slots) due to its highest frame-average power.

Full Power mode (Proximity Sensor Inactive)

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot) – CS1	32.29	32.27	32.22	33.50	23.29	23.27	23.22	24.50
GPRS (GMSK, 2 Tx slots) – CS1	32.21	32.16	32.08	33.00	26.21	26.16	26.08	27.00
EDGE (8PSK, 1 Tx slot) – MCS5	27.02	26.96	26.91	28.00	18.02	17.96	17.91	19.00
EDGE (8PSK, 2 Tx slots) – MCS5	26.82	26.76	26.71	27.00	20.82	20.76	20.71	21.00
EDGE (8PSK, 3 Tx slots) – MCS5	26.63	26.50	26.47	27.00	22.37	22.24	22.21	22.74
EDGE (8PSK, 4 Tx slots) – MCS5	26.66	26.59	26.55	27.00	23.66	23.59	23.55	24.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Reduced Power Mode (Proximity Sensor active)

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot) – CS1	30.52	30.28	30.43	31.00	21.52	21.28	21.43	22.00
GPRS (GMSK, 2 Tx slots) – CS1	27.86	27.82	27.84	28.00	21.86	21.82	21.84	22.00
EDGE (8PSK, 1 Tx slot) – MCS5	27.02	26.96	26.91	28.00	18.02	17.96	17.91	19.00
EDGE (8PSK, 2 Tx slots) – MCS5	26.82	26.76	26.71	27.00	20.82	20.76	20.71	21.00
EDGE (8PSK, 3 Tx slots) – MCS5	24.62	24.74	24.68	25.00	20.36	20.48	20.42	20.74
EDGE (8PSK, 4 Tx slots) – MCS5	23.62	23.78	23.69	25.00	20.62	20.78	20.69	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



Full Power mode (Proximity Sensor Inactive)

Band GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot) – CS1	29.59	29.45	29.38	30.50	20.59	20.45	20.38	21.50
GPRS (GMSK, 2 Tx slots) – CS1	29.50	29.38	29.29	30.00	23.50	23.38	23.29	24.00
EDGE (8PSK, 1 Tx slot) – MCS5	25.36	25.30	25.31	27.00	16.36	16.30	16.31	18.00
EDGE (8PSK, 2 Tx slots) – MCS5	25.30	25.24	25.22	26.00	19.30	19.24	19.22	20.00
EDGE (8PSK, 3 Tx slots) – MCS5	25.15	25.13	25.12	26.00	20.89	20.87	20.86	21.74
EDGE (8PSK, 4 Tx slots) – MCS5	25.10	25.08	25.03	26.00	22.10	22.08	22.03	23.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Reduced Power Mode (Proximity Sensor active)

Band GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot) – CS1	27.35	27.28	27.33	27.50	18.35	18.28	18.33	18.50
GPRS (GMSK, 2 Tx slots) – CS1	24.47	24.43	24.44	25.00	18.47	18.43	18.44	19.00
EDGE (8PSK, 1 Tx slot) – MCS5	25.36	25.30	25.31	27.00	16.36	16.30	16.31	18.00
EDGE (8PSK, 2 Tx slots) – MCS5	23.63	23.56	23.48	24.00	17.63	17.56	17.48	18.00
EDGE (8PSK, 3 Tx slots) – MCS5	21.32	21.26	21.30	22.00	17.06	17.00	17.04	17.74
EDGE (8PSK, 4 Tx slots) – MCS5	20.96	20.98	20.93	22.00	17.96	17.98	17.93	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

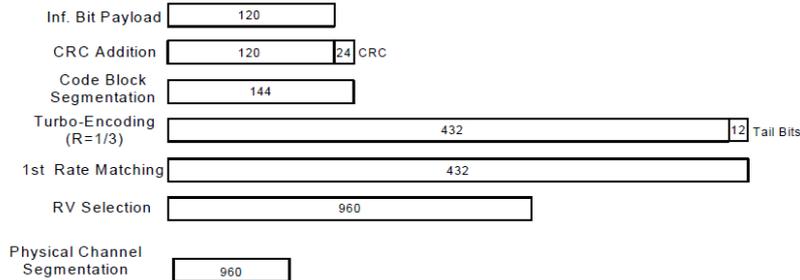


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

Note:

- Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..

Full Power Mode (Proximity Sensor Inactive)

Band			WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel			4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel			4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	23.45	23.51	23.16	24.00	23.64	23.65	23.80	24.00	22.52	22.69	22.49	24.00
0	3GPP Rel 6	HSDPA Subtest-1	23.26	23.33	23.44	24.00	23.46	23.51	23.66	24.00	22.38	22.46	22.67	24.00
0	3GPP Rel 6	HSDPA Subtest-2	23.24	23.31	23.36	24.00	23.34	23.42	23.63	24.00	22.38	22.49	22.60	24.00
0.5	3GPP Rel 6	HSDPA Subtest-3	22.74	22.83	22.96	23.50	22.84	22.95	23.21	23.50	21.86	21.97	22.23	23.50
0.5	3GPP Rel 6	HSDPA Subtest-4	22.72	22.82	22.91	23.50	22.82	22.93	23.19	23.50	21.88	21.81	21.83	23.50
0	3GPP Rel 8	DC-HSDPA Subtest-1	23.25	23.29	23.40	24.00	23.44	23.48	23.60	24.00	22.34	22.45	22.63	24.00
0	3GPP Rel 8	DC-HSDPA Subtest-2	23.23	23.26	23.35	24.00	23.30	23.41	23.59	24.00	22.23	22.26	22.23	24.00
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	22.72	22.80	22.94	23.50	22.81	22.94	23.19	23.50	21.84	21.94	22.19	23.50
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	22.70	22.74	22.91	23.50	22.80	22.90	23.15	23.50	21.82	21.90	22.16	23.50
0	3GPP Rel 6	HSUPA Subtest-1	23.11	23.10	23.15	24.00	22.81	23.01	23.07	24.00	22.23	22.36	22.38	24.00
2	3GPP Rel 6	HSUPA Subtest-2	21.73	21.88	21.95	22.00	21.60	21.80	21.90	22.00	20.36	20.38	20.39	22.00
1	3GPP Rel 6	HSUPA Subtest-3	22.12	22.10	22.16	23.00	21.70	21.84	21.93	23.00	21.17	21.24	21.79	23.00
2	3GPP Rel 6	HSUPA Subtest-4	21.80	21.92	22.00	22.00	21.63	21.70	21.95	22.00	20.38	20.40	20.43	22.00
0	3GPP Rel 6	HSUPA Subtest-5	23.25	23.32	23.33	24.00	23.39	23.45	23.60	24.00	22.20	22.23	22.29	24.00

Reduced Power Mode (Proximity Sensor active)

Band			WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel			4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel			4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	19.72	19.61	19.46	20.00	17.65	17.66	17.81	18.00	17.38	17.41	17.40	17.50
0	3GPP Rel 6	HSDPA Subtest-1	19.53	19.43	19.71	20.00	17.16	17.21	17.42	18.00	16.92	16.97	17.18	17.50
0	3GPP Rel 6	HSDPA Subtest-2	19.51	19.41	19.66	20.00	17.15	17.19	17.39	18.00	16.91	16.95	17.15	17.50
0.5	3GPP Rel 6	HSDPA Subtest-3	19.01	18.93	19.26	19.50	16.85	16.93	16.97	17.50	16.61	16.69	16.73	17.00
0.5	3GPP Rel 6	HSDPA Subtest-4	18.99	18.92	19.21	19.50	16.81	16.88	16.94	17.50	16.57	16.64	16.70	17.00
0	3GPP Rel 8	DC-HSDPA Subtest-1	19.52	19.39	19.70	20.00	17.14	17.18	17.39	18.00	16.90	16.94	17.15	17.50
0	3GPP Rel 8	DC-HSDPA Subtest-2	19.50	19.36	19.65	20.00	17.13	17.15	17.35	18.00	16.89	16.91	17.11	17.50
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	18.99	18.90	19.24	19.50	16.81	16.90	16.95	17.50	16.57	16.66	16.71	17.00
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	18.97	18.84	19.21	19.50	16.79	16.84	16.91	17.50	16.55	16.60	16.67	17.00
0	3GPP Rel 6	HSUPA Subtest-1	19.38	19.20	19.45	20.00	16.67	16.48	16.70	18.00	17.33	17.39	17.31	17.50
2	3GPP Rel 6	HSUPA Subtest-2	18.00	18.02	18.00	20.00	16.58	16.43	16.65	18.00	17.34	17.19	17.21	17.50
1	3GPP Rel 6	HSUPA Subtest-3	18.39	18.20	18.46	20.00	16.18	16.03	16.22	18.00	16.94	16.79	16.98	17.50
2	3GPP Rel 6	HSUPA Subtest-4	18.83	18.89	18.98	20.00	16.30	16.17	16.35	18.00	17.06	16.93	17.11	17.50
0	3GPP Rel 6	HSUPA Subtest-5	19.52	19.42	19.63	20.00	16.49	16.65	16.85	18.00	17.25	16.96	16.61	17.50



<CDMA2000 Conducted Power>

Note:

- Referring to KDB 941225 D01v02, the data device SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is less than 1/4dB higher than Re v0, SAR tests with those settings are not necessary.

Full Power Mode (Proximity Sensor Inactive)

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
1xRTT RC1 SO55	23.58	23.72	23.54	24.50	23.87	23.80	23.93	24.50	23.74	23.76	23.66	24.50
1xRTT RC3 SO55	23.55	23.71	23.50	24.50	23.93	23.79	23.92	24.50	23.63	23.72	23.70	24.50
1xEVDO RTAP 153.6Kbps	23.61	23.73	23.60	24.50	23.99	23.80	23.90	24.50	23.75	23.78	23.77	24.50
1xEVDO RETAP 4096Bits	23.50	23.72	23.52	24.50	23.85	23.76	23.84	24.50	23.70	23.63	23.75	24.50

Reduced Power Mode (Proximity Sensor active)

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
1xRTT RC1 SO55	18.84	19.00	19.13	19.50	17.30	16.92	17.16	17.50	18.92	18.95	18.93	19.50
1xRTT RC3 SO55	18.82	19.02	19.17	19.50	17.39	16.70	17.13	17.50	18.91	18.93	18.93	19.50
1xEVDO RTAP 153.6Kbps	19.08	18.98	19.05	19.50	17.45	17.03	17.26	17.50	18.96	18.98	18.95	19.50
1xEVDO RETAP 4096Bits	19.07	19.01	19.03	19.50	17.39	16.81	17.16	17.50	18.93	18.90	18.90	19.50



<LTE Conducted Power>

Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK $\leq 0.8W/kg$, and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
6. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK $> 0.8W/kg$ for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
7. 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq 1.45 W/kg$; Per KDB 941225 D05v03, 16QAM SAR testing is not required.
8. Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq 1.45 W/kg$; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



<LTE Band 17 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.50	23.57	23.50	24	0
10	QPSK	1	24	23.76	23.87	23.66		
10	QPSK	1	49	23.40	23.58	23.38		
10	QPSK	25	0	22.60	22.84	22.76	23	1
10	QPSK	25	12	22.52	22.74	22.70		
10	QPSK	25	24	22.52	22.64	22.49		
10	QPSK	50	0	22.37	22.61	22.60	23	1
10	16QAM	1	0	22.46	22.60	22.70		
10	16QAM	1	24	22.73	22.92	22.74		
10	16QAM	1	49	22.38	22.56	22.45	22	2
10	16QAM	25	0	21.43	21.77	21.65		
10	16QAM	25	12	21.51	21.69	21.57		
10	16QAM	25	24	21.43	21.60	21.43	22	2
10	16QAM	50	0	21.34	21.58	21.55		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.45	23.72	23.68	24	0
5	QPSK	1	12	23.59	23.74	23.58		
5	QPSK	1	24	23.71	23.69	23.55		
5	QPSK	12	0	22.50	22.99	22.70	23	1
5	QPSK	12	6	22.64	22.90	22.62		
5	QPSK	12	11	22.74	22.75	22.57		
5	QPSK	25	0	22.46	22.77	22.54	23	1
5	16QAM	1	0	22.37	22.77	22.63		
5	16QAM	1	12	22.55	22.78	22.54		
5	16QAM	1	24	22.71	22.65	22.53	22	2
5	16QAM	12	0	21.50	21.91	21.54		
5	16QAM	12	6	21.59	21.87	21.58		
5	16QAM	12	11	21.69	21.73	21.50	22	2
5	16QAM	25	0	21.40	21.74	21.46		



<LTE Band 17 Conducted Power>

Reduced Power Mode (Proximity Sensor active)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.41	21.42	21.52	22	0
10	QPSK	1	24	21.86	21.92	21.85		
10	QPSK	1	49	21.39	21.47	21.26		
10	QPSK	25	0	21.63	21.72	21.70	22	0
10	QPSK	25	12	21.75	21.87	21.83		
10	QPSK	25	24	21.65	21.58	21.56		
10	QPSK	50	0	21.52	21.70	21.66	22	0
10	16QAM	1	0	21.41	21.37	21.53		
10	16QAM	1	24	21.62	21.85	21.64		
10	16QAM	1	49	21.34	21.45	21.25	22	0
10	16QAM	25	0	21.33	21.60	21.50		
10	16QAM	25	12	21.39	21.74	21.54		
10	16QAM	25	24	21.36	21.50	21.30	22	0
10	16QAM	50	0	21.29	21.44	21.41		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	21.39	21.46	21.40	22	0
5	QPSK	1	12	21.57	21.67	21.52		
5	QPSK	1	24	21.64	21.45	21.35		
5	QPSK	12	0	21.47	21.63	21.33	22	0
5	QPSK	12	6	21.55	21.75	21.50		
5	QPSK	12	11	21.62	21.54	21.47		
5	QPSK	25	0	21.43	21.52	21.34	22	0
5	16QAM	1	0	21.38	21.48	21.42		
5	16QAM	1	12	21.52	21.71	21.51		
5	16QAM	1	24	21.68	21.45	21.45	22	0
5	16QAM	12	0	21.44	21.67	21.31		
5	16QAM	12	6	21.52	21.78	21.50		
5	16QAM	12	11	21.66	21.54	21.38	22	0
5	16QAM	25	0	21.35	21.49	21.32		



<LTE Band 13 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230			
Frequency (MHz)					782			
10	QPSK	1	0		23.40		24	0
10	QPSK	1	24		23.74			
10	QPSK	1	49		23.62			
10	QPSK	25	0		22.47		23	1
10	QPSK	25	12		22.64			
10	QPSK	25	24		22.51			
10	QPSK	50	0		22.43		23	1
10	16QAM	1	0		22.40			
10	16QAM	1	24		22.75			
10	16QAM	1	49		22.54		22	2
10	16QAM	25	0		21.36			
10	16QAM	25	12		21.60			
10	16QAM	25	24		21.51		22	2
10	16QAM	50	0		21.39			
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.45	23.33	23.63	24	0
5	QPSK	1	12	23.40	23.69	23.51		
5	QPSK	1	24	23.61	23.54	23.38		
5	QPSK	12	0	22.43	22.59	22.54	23	1
5	QPSK	12	6	22.45	22.69	22.58		
5	QPSK	12	11	22.47	22.63	22.46		
5	QPSK	25	0	22.38	22.54	22.42	23	1
5	16QAM	1	0	22.37	22.34	22.65		
5	16QAM	1	12	22.43	22.75	22.52		
5	16QAM	1	24	22.64	22.53	22.40	22	2
5	16QAM	12	0	21.42	21.65	21.53		
5	16QAM	12	6	21.47	21.67	21.55		
5	16QAM	12	11	21.60	21.66	21.53	22	2
5	16QAM	25	0	21.36	21.57	21.47		



<LTE Band 13 Conducted Power>
Reduced Power Mode (Proximity Sensor active)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230			
Frequency (MHz)					782			
10	QPSK	1	0		18.57		20	0
10	QPSK	1	24		18.80			
10	QPSK	1	49		18.72			
10	QPSK	25	0		18.60		20	0
10	QPSK	25	12		18.65			
10	QPSK	25	24		18.75			
10	QPSK	50	0		18.69		20	0
10	16QAM	1	0		18.70			
10	16QAM	1	24		18.79			
10	16QAM	1	49		18.71		20	0
10	16QAM	25	0		18.61			
10	16QAM	25	12		18.72			
10	16QAM	25	24		18.60		20	0
10	16QAM	50	0		18.52			
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	18.74	18.53	18.73	20	0
5	QPSK	1	12	18.68	18.61	18.79		
5	QPSK	1	24	18.75	18.78	18.60		
5	QPSK	12	0	18.68	18.71	18.75	20	0
5	QPSK	12	6	18.71	18.58	18.75		
5	QPSK	12	11	18.74	18.75	18.73		
5	QPSK	25	0	18.67	18.70	18.71	20	0
5	16QAM	1	0	18.71	18.45	18.70		
5	16QAM	1	12	18.71	18.65	18.78		
5	16QAM	1	24	18.73	18.67	18.61	20	0
5	16QAM	12	0	18.67	18.66	18.74		
5	16QAM	12	6	18.66	18.65	18.69		
5	16QAM	12	11	18.72	18.64	18.72	20	0
5	16QAM	25	0	18.63	18.62	18.67		



<LTE Band 5 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.67	22.54	22.64		
10	QPSK	1	24	22.50	22.50	22.53	24	0
10	QPSK	1	49	22.46	22.46	22.54		
10	QPSK	25	0	21.71	21.55	21.54		
10	QPSK	25	12	21.62	21.57	21.56	23	1
10	QPSK	25	24	21.57	21.39	21.58		
10	QPSK	50	0	21.58	21.53	21.48		
10	16QAM	1	0	21.48	21.57	21.65	23	1
10	16QAM	1	24	21.51	21.53	21.70		
10	16QAM	1	49	21.46	21.46	21.58		
10	16QAM	25	0	20.63	20.51	20.48	22	2
10	16QAM	25	12	20.55	20.51	20.49		
10	16QAM	25	24	20.32	20.37	20.50		
10	16QAM	50	0	20.43	20.47	20.42		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.56	22.44	22.41		
5	QPSK	1	12	22.61	22.39	22.64	24	0
5	QPSK	1	24	22.49	22.39	22.54		
5	QPSK	12	0	21.67	21.53	21.59		
5	QPSK	12	6	21.68	21.59	21.64	23	1
5	QPSK	12	11	21.64	21.43	21.65		
5	QPSK	25	0	21.50	21.53	21.57		
5	16QAM	1	0	21.61	21.49	21.47	23	1
5	16QAM	1	12	21.59	21.45	21.64		
5	16QAM	1	24	21.54	21.37	21.51		
5	16QAM	12	0	20.60	20.55	20.65	22	2
5	16QAM	12	6	20.64	20.55	20.68		
5	16QAM	12	11	20.63	20.41	20.61		
5	16QAM	25	0	20.49	20.51	20.53		



<LTE Band 5 Conducted Power>
Reduced Power Mode (Proximity Sensor active)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600	21	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.86	20.85	20.81		
10	QPSK	1	24	20.81	20.70	20.73	21	0
10	QPSK	1	49	20.75	20.68	20.68		
10	QPSK	25	0	20.79	20.70	20.70		
10	QPSK	25	12	20.77	20.66	20.71	21	0
10	QPSK	25	24	20.78	20.65	20.67		
10	QPSK	50	0	20.84	20.63	20.70		
10	16QAM	1	0	20.70	20.76	20.76	21	0
10	16QAM	1	24	20.85	20.71	20.73		
10	16QAM	1	49	20.77	20.68	20.68		
10	16QAM	25	0	20.75	20.67	20.75	21	0
10	16QAM	25	12	20.76	20.70	20.74		
10	16QAM	25	24	20.73	20.72	20.68		
10	16QAM	50	0	20.75	20.59	20.69	21	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.75	20.70	20.82	21	0
5	QPSK	1	12	20.79	20.68	20.59		
5	QPSK	1	24	20.77	20.62	20.68		
5	QPSK	12	0	20.71	20.64	20.66	21	0
5	QPSK	12	6	20.61	20.60	20.60		
5	QPSK	12	11	20.60	20.61	20.60		
5	QPSK	25	0	20.65	20.60	20.60	21	0
5	16QAM	1	0	20.72	20.74	20.88		
5	16QAM	1	12	20.81	20.70	20.73		
5	16QAM	1	24	20.77	20.68	20.67	21	0
5	16QAM	12	0	20.65	20.58	20.62		
5	16QAM	12	6	20.59	20.58	20.61		
5	16QAM	12	11	20.49	20.56	20.53	21	0
5	16QAM	25	0	20.63	20.53	20.59		



<LTE Band 4 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.79	23.79	23.87	24	0
20	QPSK	1	49	23.84	23.75	23.77		
20	QPSK	1	99	23.83	23.72	23.66		
20	QPSK	50	0	22.47	22.59	22.52	23	1
20	QPSK	50	24	22.49	22.50	22.45		
20	QPSK	50	49	22.51	22.38	22.51		
20	QPSK	100	0	22.52	22.70	22.47		
20	16QAM	1	0	22.83	22.90	22.84	23	1
20	16QAM	1	49	22.87	22.87	22.80		
20	16QAM	1	99	22.84	22.82	22.71		
20	16QAM	50	0	21.48	21.56	21.58	22	2
20	16QAM	50	24	21.45	21.41	21.56		
20	16QAM	50	49	21.49	21.49	21.53		
20	16QAM	100	0	21.51	21.57	21.48		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.79	23.80	23.82	24	0
15	QPSK	1	37	23.86	23.77	23.86		
15	QPSK	1	74	23.60	23.74	23.58		
15	QPSK	36	0	22.53	22.67	22.51	23	1
15	QPSK	36	18	22.57	22.60	22.67		
15	QPSK	36	37	22.49	22.53	22.50		
15	QPSK	75	0	22.48	22.70	22.51		
15	16QAM	1	0	22.76	22.85	22.80	23	1
15	16QAM	1	37	22.81	22.85	22.74		
15	16QAM	1	74	22.62	22.82	22.64		
15	16QAM	36	0	21.54	21.70	21.58	22	2
15	16QAM	36	18	21.50	21.61	21.65		
15	16QAM	36	37	21.49	21.59	21.62		
15	16QAM	75	0	21.44	21.57	21.52		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.80	23.85	23.78	24	0
10	QPSK	1	24	23.75	23.81	23.80		
10	QPSK	1	49	23.84	23.74	23.67		
10	QPSK	25	0	22.68	22.90	22.66	23	1
10	QPSK	25	12	22.64	22.69	22.70		
10	QPSK	25	24	22.58	22.69	22.73		
10	QPSK	50	0	22.43	22.68	22.40		
10	16QAM	1	0	22.84	23.00	22.77	23	1
10	16QAM	1	24	22.82	22.78	22.78		
10	16QAM	1	49	22.76	22.81	22.67		
10	16QAM	25	0	21.67	21.77	21.75	22	2
10	16QAM	25	12	21.67	21.68	21.69		
10	16QAM	25	24	21.63	21.58	21.73		
10	16QAM	50	0	21.46	21.66	21.52		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.76	23.83	23.70	24	0
5	QPSK	1	12	23.72	23.81	23.80		
5	QPSK	1	24	23.75	23.82	23.65		
5	QPSK	12	0	22.82	22.94	22.79	23	1
5	QPSK	12	6	22.80	22.86	22.84		
5	QPSK	12	11	22.68	22.85	22.69		
5	QPSK	25	0	22.57	22.78	22.60		
5	16QAM	1	0	22.82	22.83	22.80	23	1
5	16QAM	1	12	22.83	22.86	22.72		
5	16QAM	1	24	22.75	22.88	22.68		
5	16QAM	12	0	21.70	21.99	21.75	22	2
5	16QAM	12	6	21.69	21.83	21.90		
5	16QAM	12	11	21.68	21.76	21.79		
5	16QAM	25	0	21.54	21.77	21.72		



<LTE Band 4 Conducted Power>
Reduced Power Mode (Proximity Sensor active)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300	17.5	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.18	16.17	16.13		
20	QPSK	1	49	16.30	16.05	16.03	17.5	0
20	QPSK	1	99	16.20	16.12	16.00		
20	QPSK	50	0	15.93	16.02	15.96		
20	QPSK	50	24	16.11	15.89	15.92	17.5	0
20	QPSK	50	49	15.96	16.01	15.92		
20	QPSK	100	0	15.97	16.09	15.89		
20	16QAM	1	0	16.08	16.15	16.09	17.5	0
20	16QAM	1	49	16.25	16.10	16.01		
20	16QAM	1	99	16.12	16.14	15.95		
20	16QAM	50	0	15.86	16.02	15.91	17.5	0
20	16QAM	50	24	16.03	15.89	15.91		
20	16QAM	50	49	15.92	16.01	15.88		
20	16QAM	100	0	15.96	16.01	15.88	17.5	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.93	16.21	15.98	17.5	0
15	QPSK	1	37	16.13	16.04	15.93		
15	QPSK	1	74	15.91	16.14	15.87		
15	QPSK	36	0	15.83	16.07	15.82	17.5	0
15	QPSK	36	18	16.03	16.01	15.88		
15	QPSK	36	37	15.86	16.09	15.81		
15	QPSK	75	0	15.84	16.02	15.87	17.5	0
15	16QAM	1	0	15.92	16.17	15.86		
15	16QAM	1	37	16.13	16.01	15.88		
15	16QAM	1	74	15.90	16.07	15.83	17.5	0
15	16QAM	36	0	15.82	16.01	15.82		
15	16QAM	36	18	15.97	15.92	15.84		
15	16QAM	36	37	15.83	16.04	15.75	17.5	0
15	16QAM	75	0	15.82	16.01	15.80		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.86	16.28	15.98	17.5	0
10	QPSK	1	24	15.99	16.01	15.97		
10	QPSK	1	49	15.99	16.12	15.86		
10	QPSK	25	0	15.85	16.09	15.89	17.5	0
10	QPSK	25	12	15.99	15.96	15.90		
10	QPSK	25	24	15.82	16.11	15.88		
10	QPSK	50	0	15.78	16.01	15.80	17.5	0
10	16QAM	1	0	15.87	16.19	15.97		
10	16QAM	1	24	16.06	16.06	15.93		
10	16QAM	1	49	16.01	16.13	15.85	17.5	0
10	16QAM	25	0	15.77	15.99	15.89		
10	16QAM	25	12	15.92	15.98	15.81		
10	16QAM	25	24	15.85	16.09	15.79	17.5	0
10	16QAM	50	0	15.77	15.97	15.72		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.86	16.18	15.97	17.5	0
5	QPSK	1	12	16.05	16.06	15.94		
5	QPSK	1	24	15.92	16.16	15.84		
5	QPSK	12	0	15.93	16.16	15.96	17.5	0
5	QPSK	12	6	16.05	16.03	15.95		
5	QPSK	12	11	15.90	16.12	15.85		
5	QPSK	25	0	15.91	16.09	15.83		
5	16QAM	1	0	15.95	16.18	15.98	17.5	0
5	16QAM	1	12	16.08	16.07	15.93		
5	16QAM	1	24	15.94	16.16	15.86		
5	16QAM	12	0	15.94	16.17	15.96	17.5	0
5	16QAM	12	6	16.09	16.05	15.96		
5	16QAM	12	11	15.94	16.15	15.86		
5	16QAM	25	0	15.83	16.07	15.83		



<LTE Band 2 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.80	22.80	22.88	24	0
20	QPSK	1	49	22.81	22.76	22.71		
20	QPSK	1	99	22.71	22.61	22.70		
20	QPSK	50	0	21.77	21.54	21.52	23	1
20	QPSK	50	24	21.51	21.54	21.50		
20	QPSK	50	49	21.41	21.54	21.54		
20	QPSK	100	0	21.61	21.63	21.57	23	1
20	16QAM	1	0	21.78	21.94	21.84		
20	16QAM	1	49	21.80	21.86	21.80		
20	16QAM	1	99	21.77	21.76	21.90	22	2
20	16QAM	50	0	20.73	20.58	20.53		
20	16QAM	50	24	20.45	20.56	20.39		
20	16QAM	50	49	20.48	20.51	20.54	22	2
20	16QAM	100	0	20.50	20.58	20.51		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.78	22.69	22.74	24	0
15	QPSK	1	37	22.83	22.76	22.84		
15	QPSK	1	74	22.64	22.73	22.86		
15	QPSK	36	0	21.73	21.67	21.61	23	1
15	QPSK	36	18	21.54	21.68	21.64		
15	QPSK	36	37	21.55	21.53	21.64		
15	QPSK	75	0	21.47	21.59	21.59	23	1
15	16QAM	1	0	21.76	21.79	21.76		
15	16QAM	1	37	21.80	21.78	21.83		
15	16QAM	1	74	21.75	21.88	21.93	22	2
15	16QAM	36	0	20.72	20.63	20.62		
15	16QAM	36	18	20.57	20.55	20.63		
15	16QAM	36	37	20.47	20.63	20.65	22	2
15	16QAM	75	0	20.44	20.52	20.61		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.80	22.78	22.73	24	0
10	QPSK	1	24	22.68	22.79	22.82		
10	QPSK	1	49	22.67	22.76	22.84		
10	QPSK	25	0	21.71	21.81	21.74	23	1
10	QPSK	25	12	21.75	21.70	21.70		
10	QPSK	25	24	21.62	21.72	21.76		
10	QPSK	50	0	21.42	21.45	21.60	23	1
10	16QAM	1	0	21.77	21.84	21.77		
10	16QAM	1	24	21.66	21.91	21.87		
10	16QAM	1	49	21.64	21.89	21.96	22	2
10	16QAM	25	0	20.73	20.74	20.72		
10	16QAM	25	12	20.90	20.66	20.76		
10	16QAM	25	24	20.66	20.58	20.76	22	2
10	16QAM	50	0	20.54	20.60	20.55		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.72	22.80	22.82	24	0
5	QPSK	1	12	22.60	22.78	22.86		
5	QPSK	1	24	22.68	22.80	22.86		
5	QPSK	12	0	21.69	21.89	21.91	23	1
5	QPSK	12	6	21.57	21.82	21.84		
5	QPSK	12	11	21.70	21.78	21.97		
5	QPSK	25	0	21.46	21.67	21.77		
5	16QAM	1	0	21.71	21.77	21.84	23	1
5	16QAM	1	12	21.57	21.86	21.94		
5	16QAM	1	24	21.64	21.82	21.99		
5	16QAM	12	0	20.78	20.96	20.92	22	2
5	16QAM	12	6	20.59	20.81	20.85		
5	16QAM	12	11	20.73	20.93	20.97		
5	16QAM	25	0	20.50	20.66	20.77		



<LTE Band 2 Conducted Power>

Reduced Power Mode (Proximity Sensor active)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.72	18.94	18.78	19	0
20	QPSK	1	49	18.82	18.81	18.75		
20	QPSK	1	99	18.69	18.69	18.83		
20	QPSK	50	0	18.71	18.69	18.46	19	0
20	QPSK	50	24	18.69	18.70	18.40		
20	QPSK	50	49	18.62	18.64	18.66		
20	QPSK	100	0	18.69	18.67	18.50	19	0
20	16QAM	1	0	18.63	18.91	18.61		
20	16QAM	1	49	18.72	18.90	18.52		
20	16QAM	1	99	18.78	18.71	18.81	19	0
20	16QAM	50	0	18.59	18.63	18.39		
20	16QAM	50	24	18.66	18.69	18.42		
20	16QAM	50	49	18.59	18.61	18.64	19	0
20	16QAM	100	0	18.63	18.67	18.50		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.53	18.83	18.69	19	0
15	QPSK	1	37	18.57	18.84	18.66		
15	QPSK	1	74	18.64	18.86	18.89		
15	QPSK	36	0	18.56	18.71	18.61	19	0
15	QPSK	36	18	18.62	18.66	18.50		
15	QPSK	36	37	18.59	18.68	18.75		
15	QPSK	75	0	18.56	18.66	18.55	19	0
15	16QAM	1	0	18.53	18.79	18.61		
15	16QAM	1	37	18.59	18.84	18.62		
15	16QAM	1	74	18.64	18.83	18.90	19	0
15	16QAM	36	0	18.55	18.67	18.52		
15	16QAM	36	18	18.61	18.66	18.47		
15	16QAM	36	37	18.51	18.63	18.71	19	0
15	16QAM	75	0	18.27	18.55	18.51		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.45	18.75	18.50	19	0
10	QPSK	1	24	18.67	18.77	18.48		
10	QPSK	1	49	18.57	18.83	18.84		
10	QPSK	25	0	18.42	18.76	18.56	19	0
10	QPSK	25	12	18.57	18.70	18.52		
10	QPSK	25	24	18.58	18.67	18.70		
10	QPSK	50	0	18.48	18.67	18.51	19	0
10	16QAM	1	0	18.48	18.74	18.55		
10	16QAM	1	24	18.63	18.76	18.52		
10	16QAM	1	49	18.59	18.82	18.86	19	0
10	16QAM	25	0	18.43	18.66	18.68		
10	16QAM	25	12	18.60	18.66	18.40		
10	16QAM	25	24	18.61	18.64	18.66	19	0
10	16QAM	50	0	18.47	18.60	18.43		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.55	18.83	18.59	19	0
5	QPSK	1	12	18.54	18.85	18.59		
5	QPSK	1	24	18.56	18.78	18.84		
5	QPSK	12	0	18.53	18.82	18.61	19	0
5	QPSK	12	6	18.55	18.80	18.56		
5	QPSK	12	11	18.53	18.84	18.85		
5	QPSK	25	0	18.50	18.74	18.58		
5	16QAM	1	0	18.49	18.84	18.60	19	0
5	16QAM	1	12	18.54	18.83	18.63		
5	16QAM	1	24	18.56	18.80	18.86		
5	16QAM	12	0	18.55	18.82	18.64	19	0
5	16QAM	12	6	18.58	18.83	18.60		
5	16QAM	12	11	18.55	18.81	18.85		
5	16QAM	25	0	18.45	18.71	18.53		



<LTE Band 25 Conducted Power>
Full Power Mode (Proximity Sensor Inactive)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				26140	26365	26590		
Frequency (MHz)				1860	1882.5	1905		
20	QPSK	1	0	22.80	22.79	22.72	24	0
20	QPSK	1	49	22.84	22.69	22.83		
20	QPSK	1	99	22.70	22.75	22.94		
20	QPSK	50	0	21.51	21.68	21.70	23	1
20	QPSK	50	24	21.52	21.52	21.59		
20	QPSK	50	49	21.46	21.62	21.62		
20	QPSK	100	0	21.75	21.66	21.72	23	1
20	16QAM	1	0	21.83	21.88	21.84		
20	16QAM	1	49	21.90	21.64	21.88		
20	16QAM	1	99	21.79	21.76	21.98	22	2
20	16QAM	50	0	20.44	20.50	20.67		
20	16QAM	50	24	20.60	20.46	20.64		
20	16QAM	50	49	20.58	20.65	20.61	22	2
20	16QAM	100	0	20.82	20.65	20.71		
Channel				26115	26365	26615		
Frequency (MHz)				1857.5	1882.5	1907.5		
15	QPSK	1	0	22.76	22.74	22.90	24	0
15	QPSK	1	37	22.91	22.60	22.84		
15	QPSK	1	74	22.72	22.71	22.88		
15	QPSK	36	0	21.55	21.56	21.79	23	1
15	QPSK	36	18	21.64	21.52	21.77		
15	QPSK	36	37	21.52	21.78	21.86		
15	QPSK	75	0	21.72	21.55	21.69	23	1
15	16QAM	1	0	21.79	21.85	22.02		
15	16QAM	1	37	21.89	21.77	21.96		
15	16QAM	1	74	21.74	21.75	21.98	22	2
15	16QAM	36	0	20.65	20.77	20.82		
15	16QAM	36	18	20.65	20.56	20.78		
15	16QAM	36	37	20.43	20.72	20.81	22	2
15	16QAM	75	0	20.67	20.64	20.76		
Channel				26090	26365	26640		
Frequency (MHz)				1855	1882.5	1910		
10	QPSK	1	0	22.70	22.81	22.90	24	0
10	QPSK	1	24	22.81	22.67	22.87		
10	QPSK	1	49	22.63	22.81	22.91		
10	QPSK	25	0	21.55	21.78	21.95	23	1
10	QPSK	25	12	21.62	21.54	21.86		
10	QPSK	25	24	21.49	21.85	21.83		
10	QPSK	50	0	21.69	21.57	21.81	23	1
10	16QAM	1	0	21.70	21.85	21.97		
10	16QAM	1	24	21.90	21.64	21.92		
10	16QAM	1	49	21.68	21.78	21.98	22	2
10	16QAM	25	0	20.62	20.76	20.93		
10	16QAM	25	12	20.83	20.54	20.85		
10	16QAM	25	24	20.59	20.80	20.91	22	2
10	16QAM	50	0	20.82	20.62	20.77		



Channel				26065	26365	26665	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1882.5	1912.5		
5	QPSK	1	0	22.70	22.77	22.93	24	0
5	QPSK	1	12	22.81	22.68	22.91		
5	QPSK	1	24	22.69	22.88	22.92		
5	QPSK	12	0	21.77	21.82	22.09	23	1
5	QPSK	12	6	21.67	21.79	22.05		
5	QPSK	12	11	21.65	21.96	21.98		
5	QPSK	25	0	21.78	21.89	22.03		
5	16QAM	1	0	21.64	21.77	21.93	23	1
5	16QAM	1	12	21.73	21.78	21.98		
5	16QAM	1	24	21.61	21.92	22.00		
5	16QAM	12	0	20.80	20.89	21.15	22	2
5	16QAM	12	6	20.91	20.68	21.06		
5	16QAM	12	11	20.81	21.01	21.05		
5	16QAM	25	0	20.76	20.87	21.03		



<LTE Band 25 Conducted Power>
Reduced Power Mode (Proximity Sensor active)


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				26140	26365	26590		
Frequency (MHz)				1860	1882.5	1905		
20	QPSK	1	0	18.45	18.46	18.63	19	0
20	QPSK	1	49	18.51	18.52	18.50		
20	QPSK	1	99	18.42	18.45	18.55		
20	QPSK	50	0	18.30	18.40	18.39	19	0
20	QPSK	50	24	18.45	18.39	18.51		
20	QPSK	50	49	18.34	18.37	18.41		
20	QPSK	100	0	18.35	18.39	18.38	19	0
20	16QAM	1	0	18.33	18.53	18.52		
20	16QAM	1	49	18.47	18.56	18.50		
20	16QAM	1	99	18.36	18.53	18.54	19	0
20	16QAM	50	0	18.10	18.50	18.46		
20	16QAM	50	24	18.27	18.34	18.43		
20	16QAM	50	49	18.23	18.38	18.35	19	0
20	16QAM	100	0	18.23	18.34	18.38		
Channel				26115	26365	26615		
Frequency (MHz)				1857.5	1882.5	1907.5		
15	QPSK	1	0	18.18	18.40	18.41	19	0
15	QPSK	1	37	18.35	18.47	18.48		
15	QPSK	1	74	18.25	18.43	18.54		
15	QPSK	36	0	18.04	18.33	18.22	19	0
15	QPSK	36	18	18.21	18.24	18.41		
15	QPSK	36	37	18.09	18.29	18.38		
15	QPSK	75	0	18.09	18.22	18.24	19	0
15	16QAM	1	0	18.16	18.43	18.38		
15	16QAM	1	37	18.39	18.46	18.46		
15	16QAM	1	74	18.20	18.38	18.47	19	0
15	16QAM	36	0	18.17	18.27	18.19		
15	16QAM	36	18	18.20	18.25	18.37		
15	16QAM	36	37	18.01	18.29	18.36	19	0
15	16QAM	75	0	18.01	18.22	18.22		
Channel				26090	26365	26640		
Frequency (MHz)				1855	1882.5	1910		
10	QPSK	1	0	18.14	18.37	18.32	19	0
10	QPSK	1	24	18.33	18.39	18.47		
10	QPSK	1	49	18.13	18.38	18.51		
10	QPSK	25	0	18.07	18.38	18.31	19	0
10	QPSK	25	12	18.32	18.29	18.47		
10	QPSK	25	24	18.07	18.37	18.45		
10	QPSK	50	0	18.11	18.22	18.33	19	0
10	16QAM	1	0	18.17	18.38	18.37		
10	16QAM	1	24	18.34	18.43	18.46		
10	16QAM	1	49	18.12	18.38	18.48	19	0
10	16QAM	25	0	18.05	18.32	18.30		
10	16QAM	25	12	18.24	18.28	18.37		
10	16QAM	25	24	18.04	18.32	18.41	19	0
10	16QAM	50	0	18.02	18.18	18.32		



Channel				26065	26365	26665	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1882.5	1912.5		
5	QPSK	1	0	18.10	18.36	18.36	19	0
5	QPSK	1	12	18.27	18.43	18.51		
5	QPSK	1	24	18.17	18.37	18.37		
5	QPSK	12	0	18.14	18.37	18.39	19	0
5	QPSK	12	6	18.25	18.35	18.50		
5	QPSK	12	11	18.08	18.41	18.41		
5	QPSK	25	0	18.01	18.33	18.42		
5	16QAM	1	0	18.09	18.36	18.39	19	0
5	16QAM	1	12	18.28	18.43	18.55		
5	16QAM	1	24	18.13	18.41	18.40		
5	16QAM	12	0	18.15	18.34	18.45	19	0
5	16QAM	12	6	18.27	18.36	18.45		
5	16QAM	12	11	18.17	18.40	18.41		
5	16QAM	12	11	18.17	18.40	18.41		
5	16QAM	25	0	18.10	18.25	18.41		

11. Antenna Location

<Tablet PC>

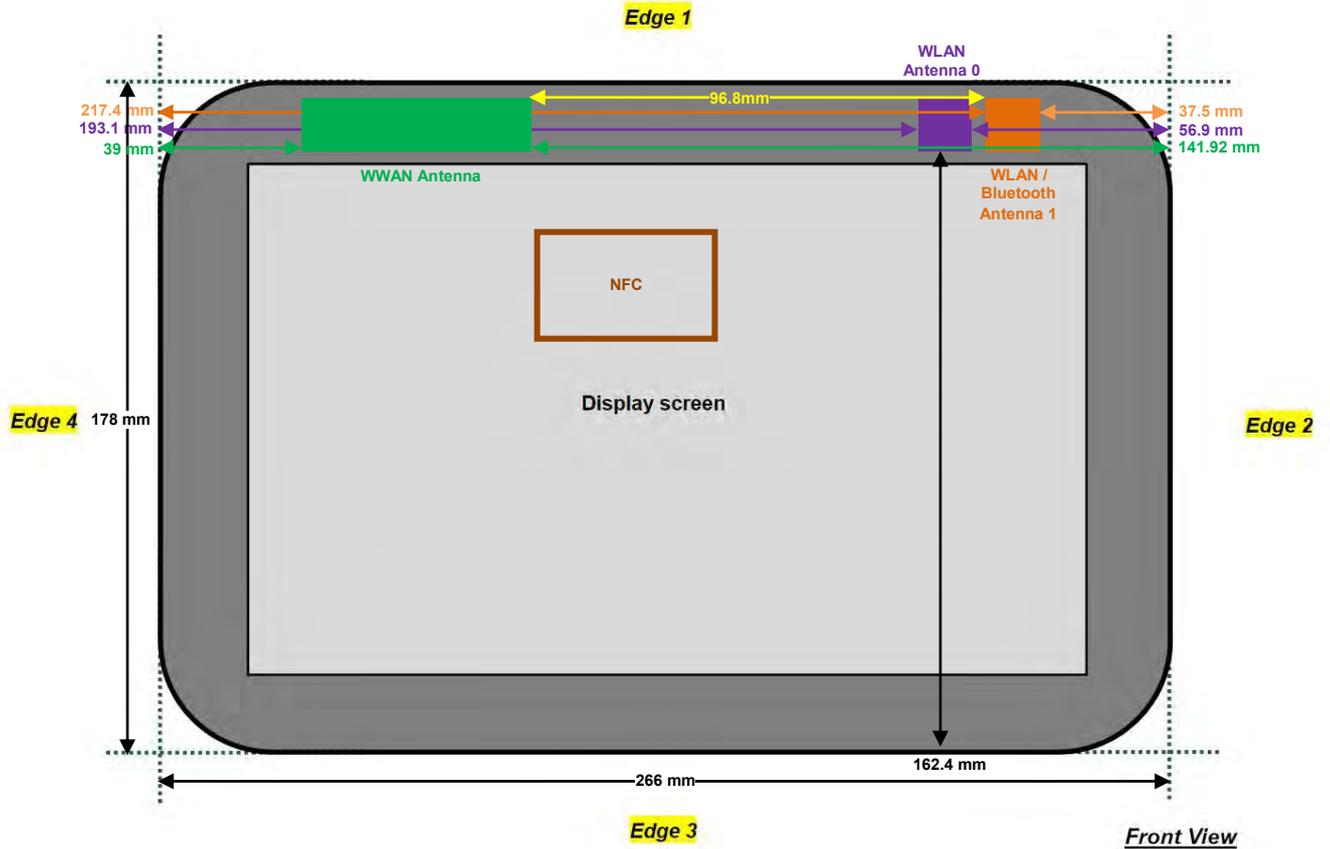



<SAR test exclusion table>

Exposure Position	Wireless Interface	GPRS 850 Class 10	GPRS 1900 Class 10	WCDMA Band V	WCDMA Band IV	WCDMA Band II	CDMA 2000 BC10	CDMA 2000 BC0	CDMA 2000 BC1	LTE Band 13	LTE Band 5	LTE Band 4	LTE Band 2	LTE Band 25
		Tune-up Maximum power	27	24	24	24	24	24	24.5	24.5	24.5	24	24	24
Tune-up Maximum rated power(mW)	501.00	251.00	251.00	251.00	251.00	251.00	282.00	282.00	282.00	251.00	251.00	251.00	251.00	251.00
Bottom Face	Antenna to user (mm)	5												
	SAR exclusion threshold (Ratio)	92.27	69.36	46.17	66.41	69.32	51.88	51.94	77.89	44.45	46.23	66.48	69.36	69.45
	SAR testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Antenna to user (mm)	5												
	SAR exclusion threshold (Ratio)	92.27	69.36	46.17	66.41	69.32	51.88	51.94	77.89	44.45	46.23	66.48	69.36	69.45
	SAR testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Antenna to user (mm)	149.45												
	SAR exclusion threshold (mW)	725.11	1103.06	723.98	1107.89	1103.12	723.98	725.11	1103.12	689.2	725.11	1107.76	1103.06	1102.92
	SAR testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 3	Antenna to user (mm)	162.4												
	SAR exclusion threshold (mW)	798.32	1232.56	797.02	1237.39	1232.62	797.02	798.32	1232.62	756.89	798.32	1237.26	1232.56	1232.42
	SAR testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Antenna to user (mm)	39												
	SAR exclusion threshold (Ratio)	11.83	8.89	5.92	8.51	8.89	6.65	6.66	9.99	5.7	5.93	8.52	8.89	8.9
	SAR testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r01, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05r01, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

12. SAR Test Results

Note:

1. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR ≤0.8W/kg, other channels SAR testing is not necessary.
3. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 1.1cm for Bottom Face, 0.7cm for Edge 1.
4. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded.
5. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK ≤0.8W/kg, and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
6. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK >0.8W/kg for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
7. 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r02, smaller bandwidth SAR testing is not required.

12.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Bottom Face	1.1cm	128	824.2	OFF	32.21	33	1.199	-0.05	1.080	1.295
	GSM850	GPRS (2 Tx slots)	Bottom Face	1.1cm	189	836.4	OFF	32.16	33	1.213	0.07	1.090	1.323
	GSM850	GPRS (2 Tx slots)	Bottom Face	1.1cm	251	848.8	OFF	32.08	33	1.236	0	1.020	1.261
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	128	824.2	OFF	32.21	33	1.199	0	1.170	1.403
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	189	836.4	OFF	32.16	33	1.213	-0.18	1.140	1.383
	GSM850	GPRS (2 Tx slots)	Edge 1	0.7cm	251	848.8	OFF	32.08	33	1.236	0	1.060	1.310
	GSM850	GPRS (2 Tx slots)	Edge 4	0cm	128	824.2	OFF	32.21	33	1.199	-0.06	0.251	0.301
	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	128	824.2	ON	27.86	28	1.033	-0.15	1.400	1.446
01	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	189	836.4	ON	27.82	28	1.042	-0.11	1.410	1.470
	GSM850	GPRS (2 Tx slots)	Bottom Face	0cm	251	848.8	ON	27.84	28	1.038	-0.1	1.400	1.453
	GSM850	GPRS (2 Tx slots)	Edge 1	0cm	128	824.2	ON	27.86	28	1.033	-0.18	0.767	0.792
	GSM1900	GPRS (2 Tx slots)	Bottom Face	1.1cm	512	1850.2	OFF	29.5	30	1.122	-0.03	0.600	0.673
	GSM1900	GPRS (2 Tx slots)	Edge 1	0.7cm	512	1850.2	OFF	29.5	30	1.122	-0.09	0.720	0.808
	GSM1900	GPRS (2 Tx slots)	Edge 1	0.7cm	661	1880	OFF	29.38	30	1.153	-0.08	0.753	0.869
	GSM1900	GPRS (2 Tx slots)	Edge 1	0.7cm	810	1909.8	OFF	29.29	30	1.178	-0.11	0.785	0.924
	GSM1900	GPRS (2 Tx slots)	Edge 4	0cm	512	1850.2	OFF	29.5	30	1.122	-0.08	0.282	0.316
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	512	1850.2	ON	24.47	25	1.130	0.04	1.260	1.424
02	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	661	1880	ON	24.43	25	1.140	-0.03	1.280	1.460
	GSM1900	GPRS (2 Tx slots)	Bottom Face	0cm	810	1909.8	ON	24.44	25	1.138	-0.04	1.280	1.456
	GSM1900	GPRS (2 Tx slots)	Edge 1	0cm	512	1850.2	ON	24.47	25	1.130	-0.13	0.930	1.051
	GSM1900	GPRS (2 Tx slots)	Edge 1	0cm	661	1880	ON	24.43	25	1.140	-0.11	0.985	1.123
	GSM1900	GPRS (2 Tx slots)	Edge 1	0cm	810	1909.8	ON	24.44	25	1.138	-0.12	1.090	1.240



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC12.2Kbps	Bottom Face	1.1cm	4182	836.4	OFF	23.51	24	1.119	-0.02	0.632	0.707
	WCDMA V	RMC12.2Kbps	Edge 1	0.7cm	4182	836.4	OFF	23.51	24	1.119	0.02	0.672	0.752
	WCDMA V	RMC12.2Kbps	Edge 4	0cm	4182	836.4	OFF	23.51	24	1.119	-0.13	0.134	0.150
	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	4132	826.4	ON	19.72	20	1.067	0.02	1.140	1.216
	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	4182	836.4	ON	19.61	20	1.094	-0.04	1.120	1.225
03	WCDMA V	RMC12.2Kbps	Bottom Face	0cm	4233	846.6	ON	19.46	20	1.132	-0.1	1.160	1.314
	WCDMA V	RMC12.2Kbps	Edge 1	0cm	4132	826.4	ON	19.72	20	1.067	-0.07	0.394	0.420
	WCDMA IV	RMC12.2Kbps	Bottom Face	1.1cm	1413	1732.6	OFF	22.69	24	1.352	-0.03	0.591	0.799
	WCDMA IV	RMC12.2Kbps	Edge 1	0.7cm	1413	1732.6	OFF	22.69	24	1.352	-0.05	0.702	0.949
	WCDMA IV	RMC12.2Kbps	Edge 1	0.7cm	1312	1712.4	OFF	22.52	24	1.406	-0.04	0.707	0.994
	WCDMA IV	RMC12.2Kbps	Edge 1	0.7cm	1513	1752.6	OFF	22.49	24	1.416	-0.04	0.681	0.964
	WCDMA IV	RMC12.2Kbps	Edge 4	0cm	1413	1732.6	OFF	22.69	24	1.352	-0.03	0.360	0.487
04	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	1413	1732.6	ON	17.41	17.5	1.021	0.17	1.380	1.409
	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	1312	1712.4	ON	17.38	17.5	1.028	-0.01	1.360	1.398
	WCDMA IV	RMC12.2Kbps	Bottom Face	0cm	1513	1752.6	ON	17.4	17.5	1.023	-0.01	1.320	1.351
	WCDMA IV	RMC12.2Kbps	Edge 1	0cm	1413	1732.6	ON	17.41	17.5	1.021	0.03	0.660	0.674
	WCDMA II	RMC12.2Kbps	Bottom Face	1.1cm	9538	1907.6	OFF	23.8	24	1.047	-0.03	0.706	0.739
	WCDMA II	RMC12.2Kbps	Edge 1	0.7cm	9538	1907.6	OFF	23.8	24	1.047	-0.01	0.893	0.935
	WCDMA II	RMC12.2Kbps	Edge 1	0.7cm	9262	1852.4	OFF	23.64	24	1.086	-0.14	0.724	0.787
	WCDMA II	RMC12.2Kbps	Edge 1	0.7cm	9400	1880	OFF	23.65	24	1.084	-0.05	0.715	0.775
	WCDMA II	RMC12.2Kbps	Edge 4	0cm	9538	1907.6	OFF	23.8	24	1.047	-0.09	0.343	0.359
	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	9538	1907.6	ON	17.81	18	1.045	0.02	1.150	1.201
05	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	9262	1852.4	ON	17.65	18	1.084	-0.12	1.290	1.398
	WCDMA II	RMC12.2Kbps	Bottom Face	0cm	9400	1880	ON	17.66	18	1.081	0.11	1.140	1.233
	WCDMA II	RMC12.2Kbps	Edge 1	0cm	9538	1907.6	ON	17.81	18	1.045	-0.16	0.855	0.893
	WCDMA II	RMC12.2Kbps	Edge 1	0cm	9262	1852.4	ON	17.65	18	1.084	-0.12	0.783	0.849
	WCDMA II	RMC12.2Kbps	Edge 1	0cm	9400	1880	ON	17.66	18	1.081	-0.09	0.803	0.868



<CDMA2000>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC10	RTAP 153.6Kbps	Bottom Face	1.1cm	580	820.5	OFF	23.78	24.5	1.180	-0.06	0.567	0.669
	CDMA BC10	RTAP 153.6Kbps	Edge 1	0.7cm	580	820.5	OFF	23.78	24.5	1.180	-0.06	0.660	0.779
	CDMA BC10	RTAP 153.6Kbps	Edge 4	0cm	580	820.5	OFF	23.78	24.5	1.180	0.06	0.114	0.135
06	CDMA BC10	RTAP 153.6Kbps	Bottom Face	0cm	580	820.5	ON	18.98	19.5	1.127	-0.08	0.928	1.046
	CDMA BC10	RTAP 153.6Kbps	Edge 1	0cm	580	820.5	ON	18.98	19.5	1.127	-0.09	0.305	0.344
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	1.1cm	384	836.52	OFF	23.73	24.5	1.194	0.1	0.546	0.652
	CDMA BC0	RTAP 153.6Kbps	Edge 1	0.7cm	384	836.52	OFF	23.73	24.5	1.194	-0.06	0.641	0.765
	CDMA BC0	RTAP 153.6Kbps	Edge 4	0cm	384	836.52	OFF	23.73	24.5	1.194	-0.03	0.122	0.146
07	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0cm	1013	824.7	ON	19.08	19.5	1.102	-0.09	0.890	0.980
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0cm	384	836.52	ON	18.98	19.5	1.127	-0.12	0.842	0.949
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0cm	777	848.31	ON	19.05	19.5	1.109	-0.11	0.853	0.946
	CDMA BC0	RTAP 153.6Kbps	Edge 1	0cm	1013	824.7	ON	19.08	19.5	1.102	-0.09	0.357	0.393
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	1.1cm	25	1851.25	OFF	23.99	24.5	1.125	0.09	0.742	0.834
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	1.1cm	600	1880	OFF	23.8	24.5	1.175	0.04	0.678	0.797
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	1.1cm	1175	1908.75	OFF	23.9	24.5	1.148	0.03	0.974	1.118
	CDMA BC1	RTAP 153.6Kbps	Edge 1	0.7cm	25	1851.25	OFF	23.99	24.5	1.125	0.03	0.836	0.940
	CDMA BC1	RTAP 153.6Kbps	Edge 1	0.7cm	600	1880	OFF	23.8	24.5	1.175	0.04	0.868	1.020
	CDMA BC1	RTAP 153.6Kbps	Edge 1	0.7cm	1175	1908.75	OFF	23.9	24.5	1.148	0.04	0.888	1.020
	CDMA BC1	RTAP 153.6Kbps	Edge 4	0cm	25	1851.25	OFF	23.99	24.5	1.125	0.02	0.243	0.273
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	0cm	25	1851.25	ON	17.45	17.5	1.012	0.11	0.990	1.001
08	CDMA BC1	RTAP 153.6Kbps	Bottom Face	0cm	600	1880	ON	17.03	17.5	1.114	0.12	1.080	1.203
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	0cm	1175	1908.75	ON	17.26	17.5	1.057	0.07	0.987	1.043
	CDMA BC1	RTAP 153.6Kbps	Edge 1	0cm	25	1851.25	ON	17.45	17.5	1.012	0.06	0.586	0.593



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	24	Bottom Face	1.1cm	23790	710	OFF	23.87	24	1.030	-0.09	0.383	0.395
	LTE Band 17	10M	QPSK	25	0	Bottom Face	1.1cm	23790	710	OFF	22.84	23	1.038	-0.04	0.279	0.289
	LTE Band 17	10M	QPSK	1	24	Edge 1	0.7cm	23790	710	OFF	23.87	24	1.030	-0.01	0.402	0.414
	LTE Band 17	10M	QPSK	25	0	Edge 1	0.7cm	23790	710	OFF	22.84	23	1.038	0	0.263	0.273
	LTE Band 17	10M	QPSK	1	24	Edge 4	0cm	23790	710	OFF	23.87	24	1.030	-0.01	0.136	0.140
	LTE Band 17	10M	QPSK	25	0	Edge 4	0cm	23790	710	OFF	22.84	23	1.038	-0.06	0.102	0.106
09	LTE Band 17	10M	QPSK	1	24	Bottom Face	0cm	23790	710	ON	21.92	22	1.019	-0.12	1.410	1.436
	LTE Band 17	10M	QPSK	1	24	Bottom Face	0cm	23780	709	ON	21.86	22	1.033	0.03	1.360	1.405
	LTE Band 17	10M	QPSK	1	24	Bottom Face	0cm	23800	711	ON	21.85	22	1.035	0.06	1.360	1.408
	LTE Band 17	10M	QPSK	25	12	Bottom Face	0cm	23790	710	ON	21.87	22	1.030	-0.13	1.360	1.401
	LTE Band 17	10M	QPSK	25	12	Bottom Face	0cm	23780	709	ON	21.75	22	1.059	-0.11	1.330	1.409
	LTE Band 17	10M	QPSK	25	12	Bottom Face	0cm	23800	711	ON	21.83	22	1.040	0.07	1.370	1.425
	LTE Band 17	10M	QPSK	50	0	Bottom Face	0cm	23790	710	ON	21.7	22	1.072	-0.16	1.280	1.372
	LTE Band 17	10M	QPSK	1	24	Edge 1	0cm	23790	710	ON	21.92	22	1.019	-0.03	0.879	0.895
	LTE Band 17	10M	QPSK	1	24	Edge 1	0cm	23780	709	ON	21.86	22	1.033	-0.01	0.862	0.890
	LTE Band 17	10M	QPSK	1	24	Edge 1	0cm	23800	711	ON	21.85	22	1.035	-0.17	0.861	0.891
	LTE Band 17	10M	QPSK	25	12	Edge 1	0cm	23790	710	ON	21.87	22	1.030	-0.13	0.837	0.862
	LTE Band 17	10M	QPSK	25	12	Edge 1	0cm	23780	709	ON	21.75	22	1.059	-0.13	0.776	0.822
	LTE Band 17	10M	QPSK	25	12	Edge 1	0cm	23800	711	ON	21.83	22	1.040	-0.03	0.798	0.830
	LTE Band 17	10M	QPSK	50	0	Edge 1	0cm	23790	710	ON	21.7	22	1.072	-0.13	0.752	0.806
	LTE Band 13	10M	QPSK	1	24	Bottom Face	1.1cm	23230	782	OFF	23.74	24	1.062	-0.01	0.588	0.624
	LTE Band 13	10M	QPSK	25	12	Bottom Face	1.1cm	23230	782	OFF	22.64	23	1.086	0.04	0.471	0.512
	LTE Band 13	10M	QPSK	1	24	Edge 1	0.7cm	23230	782	OFF	23.74	24	1.062	0.02	0.659	0.700
	LTE Band 13	10M	QPSK	25	12	Edge 1	0.7cm	23230	782	OFF	22.64	23	1.086	0.07	0.504	0.548
	LTE Band 13	10M	QPSK	1	24	Edge 4	0cm	23230	782	OFF	23.74	24	1.062	-0.15	0.136	0.144
	LTE Band 13	10M	QPSK	25	12	Edge 4	0cm	23230	782	OFF	22.64	23	1.086	-0.14	0.106	0.115
	LTE Band 13	10M	QPSK	1	24	Bottom Face	0cm	23230	782	ON	18.8	20	1.318	-0.15	0.933	1.230
10	LTE Band 13	10M	QPSK	25	24	Bottom Face	0cm	23230	782	ON	18.75	20	1.334	-0.09	0.957	1.276
	LTE Band 13	10M	QPSK	50	0	Bottom Face	0cm	23230	782	ON	18.69	20	1.352	-0.1	0.901	1.218
	LTE Band 13	10M	QPSK	1	24	Edge 1	0cm	23230	782	ON	18.8	20	1.318	0.12	0.537	0.708
	LTE Band 13	10M	QPSK	25	24	Edge 1	0cm	23230	782	ON	18.75	20	1.334	-0.04	0.518	0.691
	LTE Band 5	10M	QPSK	1	0	Bottom Face	1.1cm	20450	829	OFF	22.67	24	1.358	-0.01	0.430	0.584
	LTE Band 5	10M	QPSK	25	0	Bottom Face	1.1cm	20450	829	OFF	21.71	23	1.346	-0.04	0.341	0.459
	LTE Band 5	10M	QPSK	1	0	Edge 1	0.7cm	20450	829	OFF	22.67	24	1.358	0.04	0.528	0.717
	LTE Band 5	10M	QPSK	25	0	Edge 1	0.7cm	20450	829	OFF	21.71	23	1.346	-0.04	0.423	0.569
	LTE Band 5	10M	QPSK	1	0	Edge 4	0cm	20450	829	OFF	22.67	24	1.358	-0.11	0.095	0.129
	LTE Band 5	10M	QPSK	25	0	Edge 4	0cm	20450	829	OFF	21.71	23	1.346	-0.06	0.075	0.101
	LTE Band 5	10M	QPSK	1	0	Bottom Face	0cm	20450	829	ON	20.86	21	1.033	-0.05	1.360	1.405
11	LTE Band 5	10M	QPSK	1	0	Bottom Face	0cm	20525	836.5	ON	20.85	21	1.035	-0.03	1.400	1.449
	LTE Band 5	10M	QPSK	1	0	Bottom Face	0cm	20600	844	ON	20.81	21	1.045	-0.01	1.380	1.442
	LTE Band 5	10M	QPSK	25	0	Bottom Face	0cm	20450	829	ON	20.79	21	1.050	-0.04	1.340	1.406
	LTE Band 5	10M	QPSK	25	0	Bottom Face	0cm	20525	836.5	ON	20.7	21	1.072	-0.08	1.340	1.436
	LTE Band 5	10M	QPSK	25	0	Bottom Face	0cm	20600	844	ON	20.7	21	1.072	-0.06	1.350	1.447
	LTE Band 5	10M	QPSK	50	0	Bottom Face	0cm	20450	829	ON	20.84	21	1.038	-0.05	1.270	1.318
	LTE Band 5	10M	QPSK	1	0	Edge 1	0cm	20450	829	ON	20.86	21	1.033	-0.05	0.460	0.475
	LTE Band 5	10M	QPSK	25	0	Edge 1	0cm	20450	829	ON	20.79	21	1.050	-0.15	0.452	0.474



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Bottom Face	1.1cm	20300	1745	OFF	23.87	24	1.030	0.03	1.190	1.226
	LTE Band 4	20M	QPSK	1	0	Bottom Face	1.1cm	20050	1720	OFF	23.79	24	1.050	0.06	1.190	1.249
	LTE Band 4	20M	QPSK	1	0	Bottom Face	1.1cm	20175	1732.5	OFF	23.79	24	1.050	0	1.180	1.238
	LTE Band 4	20M	QPSK	50	0	Bottom Face	1.1cm	20175	1732.5	OFF	22.59	23	1.099	-0.01	0.766	0.842
	LTE Band 4	20M	QPSK	50	0	Bottom Face	1.1cm	20050	1720	OFF	22.47	23	1.130	-0.02	0.798	0.902
	LTE Band 4	20M	QPSK	50	0	Bottom Face	1.1cm	20300	1745	OFF	22.52	23	1.117	-0.01	0.763	0.852
	LTE Band 4	20M	QPSK	100	0	Bottom Face	1.1cm	20175	1732.5	OFF	22.7	23	1.072	0.01	0.780	0.836
	LTE Band 4	20M	QPSK	1	0	Edge 1	0.7cm	20300	1745	OFF	23.87	24	1.030	0.06	0.849	0.875
	LTE Band 4	20M	QPSK	1	0	Edge 1	0.7cm	20050	1720	OFF	23.79	24	1.050	0.03	0.914	0.959
	LTE Band 4	20M	QPSK	1	0	Edge 1	0.7cm	20175	1732.5	OFF	23.79	24	1.050	0.01	0.847	0.889
	LTE Band 4	20M	QPSK	50	0	Edge 1	0.7cm	20175	1732.5	OFF	22.59	23	1.099	-0.06	0.599	0.658
	LTE Band 4	20M	QPSK	100	0	Edge 1	0.7cm	20175	1732.5	OFF	22.7	23	1.072	0.01	0.628	0.673
	LTE Band 4	20M	QPSK	1	0	Edge 4	0cm	20300	1745	OFF	23.87	24	1.030	0.1	0.435	0.448
	LTE Band 4	20M	QPSK	50	0	Edge 4	0cm	20175	1732.5	OFF	22.59	24	1.384	0.15	0.312	0.432
	LTE Band 4	20M	QPSK	1	49	Bottom Face	0cm	20050	1720	ON	16.3	17.5	1.318	0.08	1.020	1.345
12	LTE Band 4	20M	QPSK	1	49	Bottom Face	0cm	20175	1732.5	ON	16.05	17.5	1.396	0.07	1.010	1.410
	LTE Band 4	20M	QPSK	1	49	Bottom Face	0cm	20300	1745	ON	16.03	17.5	1.403	0.05	0.999	1.401
	LTE Band 4	20M	QPSK	50	24	Bottom Face	0cm	20050	1720	ON	16.11	17.5	1.377	0.03	1.020	1.405
	LTE Band 4	20M	QPSK	50	24	Bottom Face	0cm	20175	1732.5	ON	15.89	17.5	1.449	-0.03	0.967	1.401
	LTE Band 4	20M	QPSK	50	24	Bottom Face	0cm	20300	1745	ON	15.92	17.5	1.439	-0.07	0.938	1.350
	LTE Band 4	20M	QPSK	100	0	Bottom Face	0cm	20175	1732.5	ON	16.09	17.5	1.384	-0.01	0.963	1.332
	LTE Band 4	20M	QPSK	1	49	Edge 1	0cm	20050	1720	ON	16.3	17.5	1.318	0.03	0.394	0.519
	LTE Band 4	20M	QPSK	50	24	Edge 1	0cm	20050	1720	ON	16.11	17.5	1.377	-0.06	0.270	0.372
	LTE Band 2	20M	QPSK	1	0	Bottom Face	1.1cm	19100	1900	OFF	22.88	24	1.294	0.03	0.509	0.659
	LTE Band 2	20M	QPSK	50	0	Bottom Face	1.1cm	18700	1860	OFF	21.77	23	1.327	0.05	0.389	0.516
	LTE Band 2	20M	QPSK	1	0	Edge 1	0.7cm	19100	1900	OFF	22.88	24	1.294	0.03	0.600	0.777
	LTE Band 2	20M	QPSK	50	0	Edge 1	0.7cm	18700	1860	OFF	21.77	23	1.327	0.01	0.577	0.766
	LTE Band 2	20M	QPSK	1	0	Edge 4	0cm	19100	1900	OFF	22.88	24	1.294	0.1	0.276	0.357
	LTE Band 2	20M	QPSK	50	0	Edge 4	0cm	18700	1860	OFF	21.77	23	1.327	0.08	0.179	0.238
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	18900	1880	ON	18.94	19	1.014	-0.18	1.310	1.328
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	18700	1860	ON	18.72	19	1.067	-0.09	1.290	1.376
	LTE Band 2	20M	QPSK	1	0	Bottom Face	0cm	19100	1900	ON	18.78	19	1.052	0.1	1.320	1.389
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	18700	1860	ON	18.71	19	1.069	-0.13	1.280	1.368
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	18900	1880	ON	18.69	19	1.074	-0.1	1.240	1.332
13	LTE Band 2	20M	QPSK	50	0	Bottom Face	0cm	19100	1900	ON	18.46	19	1.132	-0.18	1.240	1.404
	LTE Band 2	20M	QPSK	100	0	Bottom Face	0cm	18700	1860	ON	18.69	19	1.074	-0.08	1.280	1.375
	LTE Band 2	20M	QPSK	1	0	Edge 1	0cm	18900	1880	ON	18.94	19	1.014	-0.04	1.220	1.237
	LTE Band 2	20M	QPSK	1	0	Edge 1	0cm	18700	1860	ON	18.72	19	1.067	-0.04	1.130	1.205
	LTE Band 2	20M	QPSK	1	0	Edge 1	0cm	19100	1900	ON	18.78	19	1.052	-0.07	1.300	1.368
	LTE Band 2	20M	QPSK	50	0	Edge 1	0cm	18700	1860	ON	18.71	19	1.069	-0.09	1.250	1.336
	LTE Band 2	20M	QPSK	50	0	Edge 1	0cm	18900	1880	ON	18.69	19	1.074	-0.13	1.300	1.396
	LTE Band 2	20M	QPSK	50	0	Edge 1	0cm	19100	1900	ON	18.46	19	1.132	-0.04	1.210	1.370
	LTE Band 2	20M	QPSK	100	0	Edge 1	0cm	18700	1860	ON	18.69	19	1.074	-0.11	1.270	1.364



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	99	Bottom Face	1.1cm	26590	1905	OFF	22.94	24	1.276	0	0.498	0.636
	LTE Band 25	20M	QPSK	50	0	Bottom Face	1.1cm	26590	1905	OFF	21.7	23	1.349	0.02	0.380	0.513
	LTE Band 25	20M	QPSK	1	99	Edge 1	0.7cm	26590	1905	OFF	22.94	24	1.276	-0.02	0.799	1.020
	LTE Band 25	20M	QPSK	1	99	Edge 1	0.7cm	26140	1860	OFF	22.7	24	1.349	0	0.737	0.994
	LTE Band 25	20M	QPSK	1	99	Edge 1	0.7cm	26365	1882.5	OFF	22.75	24	1.334	-0.02	0.782	1.043
	LTE Band 25	20M	QPSK	50	0	Edge 1	0.7cm	26590	1905	OFF	21.7	23	1.349	-0.01	0.603	0.813
	LTE Band 25	20M	QPSK	50	0	Edge 1	0.7cm	26140	1860	OFF	21.51	23	1.409	-0.01	0.565	0.796
	LTE Band 25	20M	QPSK	50	0	Edge 1	0.7cm	26365	1882.5	OFF	21.68	23	1.355	0.01	0.586	0.794
	LTE Band 25	20M	QPSK	100	0	Edge 1	0.7cm	26140	1860	OFF	21.75	23	1.334	0.06	0.600	0.800
	LTE Band 25	20M	QPSK	1	99	Edge 4	0cm	26590	1905	OFF	22.94	24	1.276	0.06	0.299	0.382
	LTE Band 25	20M	QPSK	50	0	Edge 4	0cm	26590	1905	OFF	21.7	23	1.349	0.03	0.199	0.268
14	LTE Band 25	20M	QPSK	1	0	Bottom Face	0cm	26590	1905	ON	18.63	19	1.089	0.02	1.250	1.361
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0cm	26140	1860	ON	18.45	19	1.135	-0.04	1.120	1.271
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0cm	26365	1882.5	ON	18.46	19	1.132	-0.07	1.040	1.178
	LTE Band 25	20M	QPSK	50	24	Bottom Face	0cm	26590	1905	ON	18.51	19	1.119	0.17	0.982	1.099
	LTE Band 25	20M	QPSK	50	24	Bottom Face	0cm	26140	1860	ON	18.45	19	1.135	-0.01	1.040	1.180
	LTE Band 25	20M	QPSK	50	24	Bottom Face	0cm	26365	1882.5	ON	18.39	19	1.151	0.12	0.986	1.135
	LTE Band 25	20M	QPSK	100	0	Bottom Face	0cm	26365	1882.5	ON	18.39	19	1.151	0.02	0.993	1.143
	LTE Band 25	20M	QPSK	1	0	Edge 1	0cm	26590	1905	ON	18.63	19	1.089	0.01	1.070	1.165
	LTE Band 25	20M	QPSK	1	0	Edge 1	0cm	26140	1860	ON	18.45	19	1.135	-0.13	0.975	1.107
	LTE Band 25	20M	QPSK	1	0	Edge 1	0cm	26365	1882.5	ON	18.46	19	1.132	-0.11	1.050	1.189
	LTE Band 25	20M	QPSK	50	24	Edge 1	0cm	26590	1905	ON	18.51	19	1.119	-0.15	1.050	1.175
	LTE Band 25	20M	QPSK	50	24	Edge 1	0cm	26140	1860	ON	18.45	19	1.135	-0.12	0.938	1.065
	LTE Band 25	20M	QPSK	50	24	Edge 1	0cm	26365	1882.5	ON	18.39	19	1.151	-0.13	1.000	1.151
	LTE Band 25	20M	QPSK	100	0	Edge 1	0cm	26365	1882.5	ON	18.39	19	1.151	-0.12	0.99	1.139

12.2 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Sensor) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Face	0cm	189	836.4	ON	27.82	28	1.042	-0.11	1.410	-	1.470
2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Face	0cm	189	836.4	ON	27.82	28	1.042	-0.03	1.380	1.02	1.438
1st	WCDMA IV	-	-	-	-	RMC12.2Kbps	Bottom Face	0cm	1413	1732.6	ON	17.41	17.5	1.021	0.17	1.380	-	1.409
2nd	WCDMA IV	-	-	-	-	RMC12.2Kbps	Bottom Face	0cm	1413	1732.6	ON	17.41	17.5	1.021	0	1.320	1.05	1.348
1st	LTE Band 17	10M	QPSK	1	24	-	Bottom Face	0cm	23790	710	ON	21.92	22	1.019	-0.12	1.410	-	1.436
2nd	LTE Band 17	10M	QPSK	1	24	-	Bottom Face	0cm	23790	710	ON	21.92	22	1.019	-0.18	1.390	1.01	1.416
1st	LTE Band 2	20M	QPSK	1	0	-	Bottom Face	0cm	19100	1900	ON	18.78	19	1.052	0.1	1.320	-	1.389
2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Face	0cm	19100	1900	ON	18.78	19	1.052	-0.14	1.300	1.02	1.368

Note:

- Per KDB 865664 D01v01r02, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$
- Per KDB 865664 D01v01r02, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- The ratio is the largest SAR to the smallest SAR among original and repeated measurement.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Tablet	Note
		Body	
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
3.	CDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
4.	LTE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
5.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	
6.	WCDMA(Data) + Bluetooth(data)	Yes	
7.	CDMA(Data) + Bluetooth(data)	Yes	
8.	LTE(Data) + Bluetooth(data)	Yes	
9.	GPRS/EDGE(data) + WLAN5GHz(data)	No	
10.	WCDMA(data) + WLAN5GHz(data)	No	
11.	CDMA(data) + WLAN5 GHz(data)	No	
12.	LTE(data) + WLAN5GHz(data)	No	

Note:

1. WLAN SAR test result and Bluetooth maximum power in the Sporton SAR report FCC ID: B94HNC78CBRPR (report no. FA392719-01 Rev.02) are used for simultaneous transmission analysis.
2. For simultaneous transmission analysis for exposure position of bottom face 1.1cm and Edge1 0.7cm, WLAN SAR tested at 0mm separation testing results are used for conservative SAR summation.
3. For co-location analysis:
 - i) For WWAN SAR testing was performed on bottom face, Edge1 and Edge4, according to KDB 447498 D01v05r01 exclusion thresholds which can be referred to page59.
 - ii) The WLAN SAR testing was performed on bottom face, Edge1 and Edge2, according to KDB 447498 D01v05r01 exclusion thresholds which can be referred to Sporton FCC SAR Report, FCC ID: B94HNC78CBRPR, Report No: FA392719-01 Rev.01 page34.
 - iii) For co-location analysis was performed at the same exposure positions, which are bottom face and Edge1, where both WWAN standalone SAR and WLAN standalone SAR was assessed.
4. Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. separation distance, mm)$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
 - i) $(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)[\sqrt{f(GHz)/x}] W/kg$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum test separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
 - iv) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
9.5 dBm	Estimated SAR (W/kg)	0.378 W/kg



13.1 Body Exposure Conditions

<WWAN+WLAN Antenna 0>

Position	WWAN		WLAN Ant 0	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	1.323	1.161	2.48	0.03	Case 1
	GSM1900	0.673	1.161	1.83	0.02	Case 2
	WCDMA V	0.707	1.161	1.87	0.02	Case 3
	WCDMA IV	0.799	1.161	1.96	0.02	Case 4
	WCDMA II	0.739	1.161	1.90	0.02	Case 5
	CDMA BC10	0.669	1.161	1.83	0.02	Case 6
	CDMA BC0	0.652	1.161	1.81	0.02	Case 7
	CDMA BC1	1.118	1.161	2.28	0.03	Case 8
	LTE Band 17	0.395	1.161	1.56		
	LTE Band 13	0.624	1.161	1.79	0.02	Case 9
	LTE Band 5	0.584	1.161	1.75	0.02	Case 10
	LTE Band 4	1.249	1.161	2.41	0.03	Case 11
	LTE Band 2	0.659	1.161	1.82	0.02	Case 12
	LTE Band 25	0.636	1.161	1.80	0.02	Case 13
Edge1 At 0.7 cm	GSM850	1.403	0.237	1.64	0.02	Case 14
	GSM1900	0.924	0.237	1.16		
	WCDMA V	0.752	0.237	0.99		
	WCDMA IV	0.994	0.237	1.23		
	WCDMA II	0.935	0.237	1.17		
	CDMA BC10	0.779	0.237	1.02		
	CDMA BC0	0.765	0.237	1.00		
	CDMA BC1	1.020	0.237	1.26		
	LTE Band 17	0.414	0.237	0.65		
	LTE Band 13	0.700	0.237	0.94		
	LTE Band 5	0.717	0.237	0.95		
	LTE Band 4	0.959	0.237	1.20		
	LTE Band 2	0.777	0.237	1.01		
LTE Band 25	1.043	0.237	1.28			



<WWAN+WLAN Antenna 0>

Position	WWAN		WLAN Ant 0	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 0cm	GSM850	1.470	1.161	2.63	0.03	Case 15
	GSM1900	1.460	1.161	2.62	0.03	Case 16
	WCDMA V	1.314	1.161	2.48	0.03	Case 17
	WCDMA IV	1.409	1.161	2.57	0.03	Case 18
	WCDMA II	1.398	1.161	2.56	0.03	Case 19
	CDMA BC10	1.046	1.161	2.21	0.03	Case 20
	CDMA BC0	0.980	1.161	2.14	0.03	Case 21
	CDMA BC1	1.203	1.161	2.36	0.03	Case 22
	LTE Band 17	1.436	1.161	2.60	0.03	Case 23
	LTE Band 13	1.276	1.161	2.44	0.03	Case 24
	LTE Band 5	1.449	1.161	2.61	0.03	Case 25
	LTE Band 4	1.410	1.161	2.57	0.03	Case 26
	LTE Band 2	1.404	1.161	2.57	0.03	Case 27
	LTE Band 25	1.361	1.161	2.52	0.03	Case 28
Edge1 At 0cm	GSM850	0.792	0.237	1.03		
	GSM1900	1.240	0.237	1.48		
	WCDMA V	0.420	0.237	0.66		
	WCDMA IV	0.586	0.237	0.82		
	WCDMA II	0.893	0.237	1.13		
	CDMA BC10	0.344	0.237	0.58		
	CDMA BC0	0.393	0.237	0.63		
	CDMA BC1	0.593	0.237	0.83		
	LTE Band 17	0.895	0.237	1.13		
	LTE Band 13	0.708	0.237	0.95		
	LTE Band 5	0.475	0.237	0.71		
	LTE Band 4	0.519	0.237	0.76		
	LTE Band 2	1.396	0.237	1.63	0.02	Case 91
	LTE Band 25	1.189	0.237	1.43		



<WWAN+WLAN Antenna 1>

Position	WWAN		WLAN Ant 1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	1.323	0.595	1.92	0.02	Case 30
	GSM1900	0.673	0.595	1.27		
	WCDMA V	0.707	0.595	1.30		
	WCDMA IV	0.799	0.595	1.39		
	WCDMA II	0.739	0.595	1.33		
	CDMA BC10	0.669	0.595	1.26		
	CDMA BC0	0.652	0.595	1.25		
	CDMA BC1	1.118	0.595	1.71	0.02	Case 31
	LTE Band 17	0.395	0.595	0.99		
	LTE Band 13	0.624	0.595	1.22		
	LTE Band 5	0.584	0.595	1.18		
	LTE Band 4	1.249	0.595	1.84	0.02	Case 32
	LTE Band 2	0.659	0.595	1.25		
	LTE Band 25	0.636	0.595	1.23		
Edge1 At 0.7 cm	GSM850	1.403	0.152	1.56		
	GSM1900	0.924	0.152	1.08		
	WCDMA V	0.752	0.152	0.90		
	WCDMA IV	0.994	0.152	1.15		
	WCDMA II	0.935	0.152	1.09		
	CDMA BC10	0.779	0.152	0.93		
	CDMA BC0	0.765	0.152	0.92		
	CDMA BC1	1.020	0.152	1.17		
	LTE Band 17	0.414	0.152	0.57		
	LTE Band 13	0.700	0.152	0.85		
	LTE Band 5	0.717	0.152	0.87		
	LTE Band 4	0.959	0.152	1.11		
	LTE Band 2	0.777	0.152	0.93		
	LTE Band 25	1.020	0.152	1.17		



<WWAN+WLAN Antenna 1>

Position	WWAN		WLAN Ant 1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 0cm	GSM850	1.470	0.595	2.07	0.02	Case 33
	GSM1900	1.460	0.595	2.06	0.02	Case 34
	WCDMA V	1.314	0.595	1.91	0.02	Case 35
	WCDMA IV	1.409	0.595	2.00	0.02	Case 36
	WCDMA II	1.398	0.595	1.99	0.02	Case 37
	CDMA BC10	1.046	0.595	1.64	0.02	Case 38
	CDMA BC0	0.980	0.595	1.58		
	CDMA BC1	1.203	0.595	1.80	0.02	Case 39
	LTE Band 17	1.436	0.595	2.03	0.02	Case 40
	LTE Band 13	1.276	0.595	1.87	0.02	Case 41
	LTE Band 5	1.449	0.595	2.04	0.02	Case 42
	LTE Band 4	1.410	0.595	2.01	0.02	Case 43
	LTE Band 2	1.404	0.595	2.00	0.02	Case 44
	LTE Band 25	1.361	0.595	1.96	0.02	Case 45
Edge1 At 0cm	GSM850	0.792	0.152	0.94		
	GSM1900	1.240	0.152	1.39		
	WCDMA V	0.420	0.152	0.57		
	WCDMA IV	0.586	0.152	0.74		
	WCDMA II	0.893	0.152	1.05		
	CDMA BC10	0.344	0.152	0.50		
	CDMA BC0	0.393	0.152	0.55		
	CDMA BC1	0.593	0.152	0.75		
	LTE Band 17	0.890	0.152	1.04		
	LTE Band 13	0.708	0.152	0.86		
	LTE Band 5	0.475	0.152	0.63		
	LTE Band 4	0.519	0.152	0.67		
	LTE Band 2	1.396	0.152	1.55		
LTE Band 25	1.175	0.152	1.33			



<WWAN+WLAN Antenna 0+1>

Position	WWAN		WLAN Ant 0+1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	1.323	1.226	2.55	0.03	Case 46
	GSM1900	0.673	1.226	1.90	0.02	Case 47
	WCDMA V	0.707	1.226	1.93	0.02	Case 48
	WCDMA IV	0.799	1.226	2.03	0.02	Case 49
	WCDMA II	0.739	1.226	1.97	0.02	Case 50
	CDMA BC10	0.669	1.226	1.90	0.02	Case 51
	CDMA BC0	0.652	1.226	1.88	0.02	Case 52
	CDMA BC1	1.118	1.226	2.34	0.03	Case 53
	LTE Band 17	0.395	1.226	1.62	0.02	Case 54
	LTE Band 13	0.624	1.226	1.85	0.02	Case 55
	LTE Band 5	0.584	1.226	1.81	0.02	Case 56
	LTE Band 4	1.249	1.226	2.48	0.03	Case 57
	LTE Band 2	0.659	1.226	1.89	0.02	Case 58
	LTE Band 25	0.636	1.226	1.86	0.02	Case 59
Edge1 At 0.7 cm	GSM850	1.403	0.257	1.66	0.01	Case 60
	GSM1900	0.924	0.257	1.18		
	WCDMA V	0.752	0.257	1.01		
	WCDMA IV	0.994	0.257	1.25		
	WCDMA II	0.935	0.257	1.19		
	CDMA BC10	0.779	0.257	1.04		
	CDMA BC0	0.765	0.257	1.02		
	CDMA BC1	1.020	0.257	1.28		
	LTE Band 17	0.414	0.257	0.67		
	LTE Band 13	0.700	0.257	0.96		
	LTE Band 5	0.717	0.257	0.97		
	LTE Band 4	0.959	0.257	1.22		
	LTE Band 2	0.777	0.257	1.03		
LTE Band 25	1.020	0.257	1.28			



<WWAN+WLAN Antenna 0+1>

Position	WWAN		WLAN Ant 0+1	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	SAR (W/kg)			
Bottom Face At 0cm	GSM850	1.470	1.226	2.70	0.03	Case 61
	GSM1900	1.460	1.226	2.69	0.03	Case 62
	WCDMA V	1.314	1.226	2.54	0.03	Case 63
	WCDMA IV	1.409	1.226	2.64	0.03	Case 64
	WCDMA II	1.398	1.226	2.62	0.03	Case 65
	CDMA BC10	1.046	1.226	2.27	0.03	Case 66
	CDMA BC0	0.980	1.226	2.21	0.03	Case 67
	CDMA BC1	1.203	1.226	2.43	0.03	Case 68
	LTE Band 17	1.436	1.226	2.66	0.03	Case 69
	LTE Band 13	1.276	1.226	2.50	0.03	Case 70
	LTE Band 5	1.449	1.226	2.68	0.04	Case 71
	LTE Band 4	1.410	1.226	2.64	0.03	Case 72
	LTE Band 2	1.404	1.226	2.63	0.03	Case 73
	LTE Band 25	1.361	1.226	2.59	0.03	Case 74
Edge1 At 0cm	GSM850	0.792	0.257	1.05		
	GSM1900	1.240	0.257	1.50		
	WCDMA V	0.420	0.257	0.68		
	WCDMA IV	0.586	0.257	0.84		
	WCDMA II	0.893	0.257	1.15		
	CDMA BC10	0.344	0.257	0.60		
	CDMA BC0	0.393	0.257	0.65		
	CDMA BC1	0.593	0.257	0.85		
	LTE Band 17	0.890	0.257	1.15		
	LTE Band 13	0.708	0.257	0.97		
	LTE Band 5	0.475	0.257	0.73		
	LTE Band 4	0.519	0.257	0.78		
	LTE Band 2	1.396	0.257	1.65	0.01	Case 75
LTE Band 25	1.175	0.257	1.43			



<WWAN + Bluetooth Antenna 1>

Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	Estimated SAR (W/kg)			
Bottom Face At 1.1 cm	GSM850	1.323	0.378	1.70	0.02	Case 76
	GSM1900	0.673	0.378	1.05		
	WCDMA V	0.707	0.378	1.09		
	WCDMA IV	0.799	0.378	1.18		
	WCDMA II	0.739	0.378	1.12		
	CDMA BC10	0.669	0.378	1.05		
	CDMA BC0	0.652	0.378	1.03		
	CDMA BC1	1.118	0.378	1.50		
	LTE Band 17	0.395	0.378	0.77		
	LTE Band 13	0.624	0.378	1.00		
	LTE Band 5	0.584	0.378	0.96		
	LTE Band 4	1.249	0.378	1.63	0.02	Case 77
	LTE Band 2	0.659	0.378	1.04		
	LTE Band 25	0.636	0.378	1.01		
Edge1 At 0.7 cm	GSM850	1.403	0.378	1.78	0.02	Case 78
	GSM1900	0.924	0.378	1.30		
	WCDMA V	0.752	0.378	1.13		
	WCDMA IV	0.994	0.378	1.37		
	WCDMA II	0.935	0.378	1.31		
	CDMA BC10	0.779	0.378	1.16		
	CDMA BC0	0.765	0.378	1.14		
	CDMA BC1	1.020	0.378	1.40		
	LTE Band 17	0.414	0.378	0.79		
	LTE Band 13	0.700	0.378	1.08		
	LTE Band 5	0.717	0.378	1.10		
	LTE Band 4	0.959	0.378	1.34		
	LTE Band 2	0.777	0.378	1.16		
	LTE Band 25	1.020	0.378	1.40		




<WWAN + Bluetooth Antenna 1>


Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR	Case No
	WWAN Band	SAR (W/kg)	Estimated SAR (W/kg)			
Bottom Face At 0cm	GSM850	1.470	0.378	1.85	0.03	Case 79
	GSM1900	1.460	0.378	1.84	0.03	Case 80
	WCDMA V	1.314	0.378	1.69	0.02	Case 81
	WCDMA IV	1.409	0.378	1.79	0.02	Case 91
	WCDMA II	1.398	0.378	1.78	0.02	Case 82
	CDMA BC10	1.046	0.378	1.42		
	CDMA BC0	0.980	0.378	1.36		
	CDMA BC1	1.203	0.378	1.58		
	LTE Band 17	1.436	0.378	1.81	0.03	Case 83
	LTE Band 13	1.276	0.378	1.65	0.02	Case 84
	LTE Band 5	1.449	0.378	1.83	0.03	Case 85
	LTE Band 4	1.410	0.378	1.79	0.02	Case 86
	LTE Band 2	1.404	0.378	1.78	0.02	Case 87
	LTE Band 25	1.361	0.378	1.74	0.02	Case 88
Edge1 At 0cm	GSM850	0.792	0.378	1.17		
	GSM1900	1.240	0.378	1.62	0.02	Case 89
	WCDMA V	0.420	0.378	0.80		
	WCDMA IV	0.586	0.378	0.96		
	WCDMA II	0.893	0.378	1.27		
	CDMA BC10	0.344	0.378	0.72		
	CDMA BC0	0.393	0.378	0.77		
	CDMA BC1	0.593	0.378	0.97		
	LTE Band 17	0.890	0.378	1.27		
	LTE Band 13	0.708	0.378	1.09		
	LTE Band 5	0.475	0.378	0.85		
	LTE Band 4	0.519	0.378	0.90		
LTE Band 2	1.396	0.378	1.77	0.02	Case 90	
LTE Band 25	1.175	0.378	1.55			

13.2 SPLSR Evaluation and Analysis


Case 1	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)	X	Y	Z				
	GSM850	Bottom Face	1.323	1.1	0.0875	-0.0485	-0.179	120.0	2.48	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

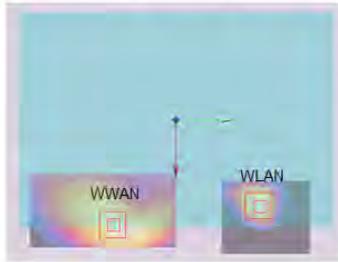


Case 2	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)	X	Y	Z				
	GSM1900	Bottom Face	0.673	1.1	0.0695	-0.0545	-0.179	124.9	1.83	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

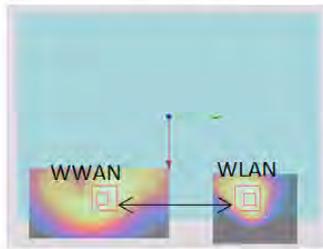


Case 3	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)	X	Y	Z				
	WCDMA V	Bottom Face	0.707	1.1	0.0855	-0.058	-0.179	129.2	1.87	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

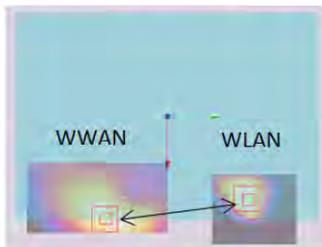


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	0.799	1.1	0.085	-0.053	-0.179	124.1	1.96	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

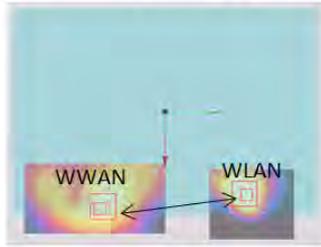

Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	0.739	1.1	0.068	-0.056	-0.179	126.5	1.90	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

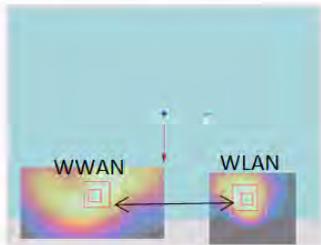


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Bottom Face	0.669	1.1	0.0855	-0.05	-0.179	121.2	1.83	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

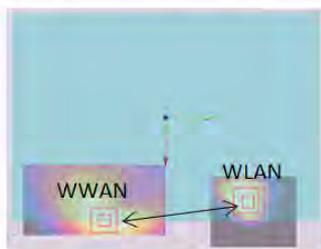


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Bottom Face	0.652	1.1	0.084	-0.058	-0.179	129.0	1.81	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				




Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Bottom Face	1.118	1.1	0.0795	-0.0545	-0.179	125.2	2.28	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

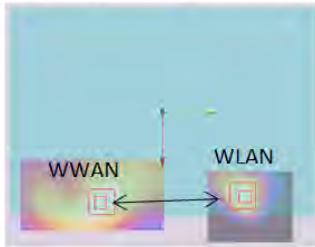

Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	0.624	1.1	0.084	-0.0515	-0.179	122.5	1.79	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

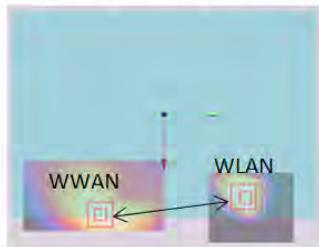


Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	0.584	1.1	0.0855	-0.058	-0.179	129.2	1.75	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

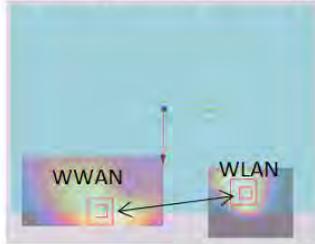


Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.249	1.1	0.0855	-0.0545	-0.179	125.7	2.41	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				




Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Bottom Face	0.659	1.1	0.0765	-0.053	-0.179	123.5	1.82	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

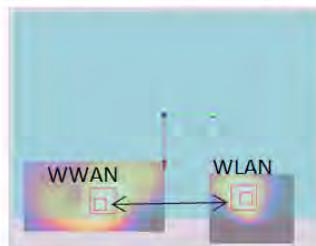


Case 13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Bottom Face	0.636	1.1	0.078	-0.053	-0.179	123.6	1.80	0.02	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

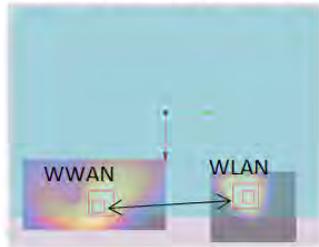


Case 14	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
					X	Y	Z				
	GSM850	Edge 1	1.403	0.7	-0.001	-0.0485	-0.18	121.3	1.64	0.02	Not required
	WLAN2.4GHz		0.237	0	-0.0012	0.0728	-0.179				

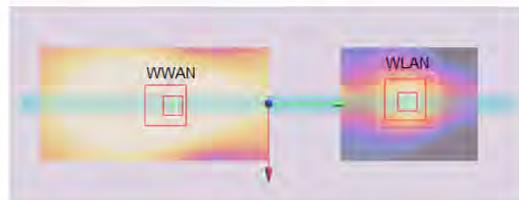


Case 15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.47	0	0.086	-0.052	-0.179	123.3	2.63	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

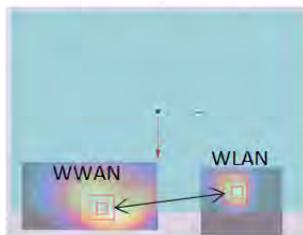


Case 16	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	GSM1900	Bottom Face	1.46	0	0.071	-0.0605	-0.178	130.9	2.62	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

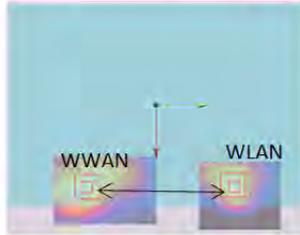


Case 17	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	WCDMA V	Bottom Face	1.314	0	0.089	-0.0515	-0.178	123.1	2.48	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

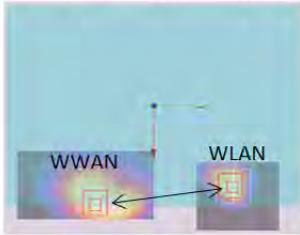


Case 18	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	WCDMA IV	Bottom Face	1.409	0	0.0725	-0.0635	-0.18	133.9	2.57	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

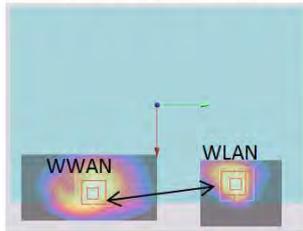


Case 19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	1.398	0	0.068	-0.059	-0.179	129.5	2.56	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

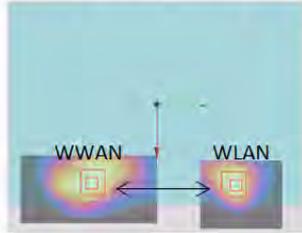


Case 20	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Bottom Face	1.046	0	0.089	-0.045	-0.178	116.7	2.21	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

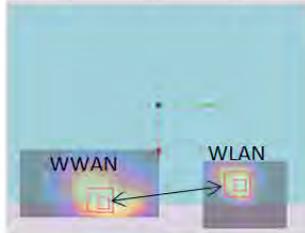


Case 21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Bottom Face	0.98	0	0.0825	-0.0535	-0.178	124.4	2.14	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

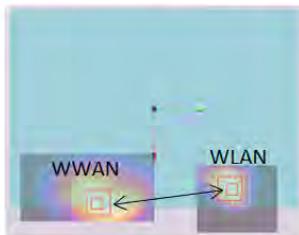


Case 22	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
	(cm)			X	Y	Z					
	CDMA BC1	Bottom Face	1.203	0	0.0795	-0.062	-0.178	132.6	2.36	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

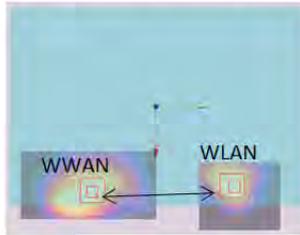


Case 23	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
	(cm)			X	Y	Z					
	LTE Band 17	Bottom Face	1.436	0	0.084	-0.055	-0.179	126.0	2.60	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

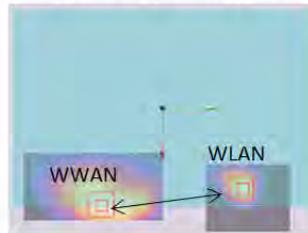


Case 24	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
	(cm)			X	Y	Z					
	LTE Band 13	Bottom Face	1.276	0	0.0825	-0.055	-0.179	125.9	2.44	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

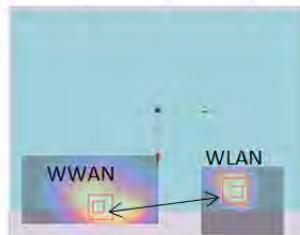


Case 26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	1.449	0	0.081	-0.05	-0.178	120.8	2.61	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

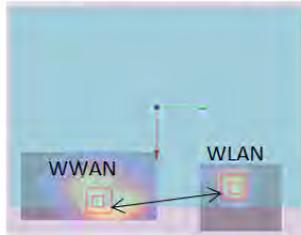


Case 26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.41	0	0.0795	-0.0605	-0.178	131.1	2.57	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

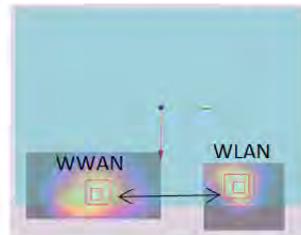


Case 27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Bottom Face	1.404	0	0.0705	-0.0575	-0.179	127.9	2.57	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

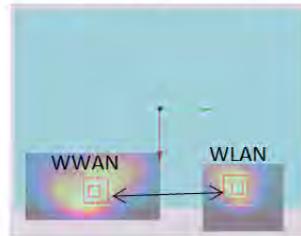


Case 28	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Bottom Face	1.361	0	0.0765	-0.059	-0.177	129.5	2.52	0.03	Not required
	WLAN2.4GHz		1.161	0	0.0716	0.0704	-0.177				

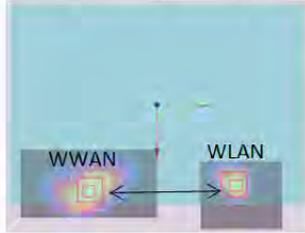


Case 29	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Edge 1	1.396	0	-0.001	-0.0635	-0.179	136.3	1.63	0.02	Not required
	WLAN2.4GHz		0.237	0	-0.0012	0.0728	-0.179				

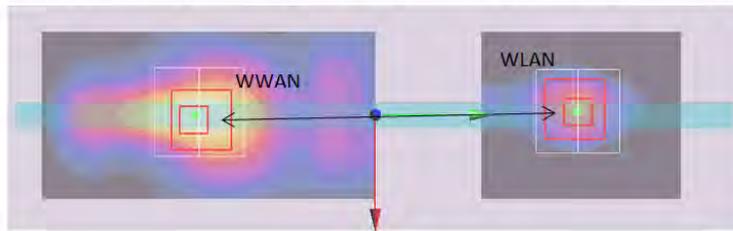


Case 30	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.323	1.1	0.0875	-0.0485	-0.179	136.5	1.92	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

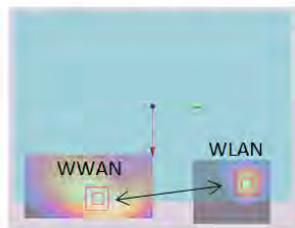

Case 31	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Bottom Face	1.118	1.1	0.0795	-0.0545	-0.179	141.9	1.71	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

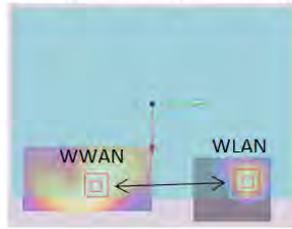


Case 32	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.249	1.1	0.0855	-0.0545	-0.179	142.3	1.84	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

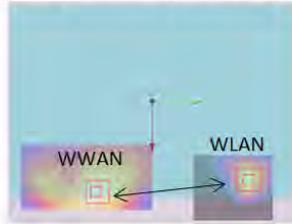


Case 33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.47	0	0.086	-0.052	-0.179	139.8	2.07	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				




Case 34	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	1.46	0	0.071	-0.0605	-0.178	147.7	2.06	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

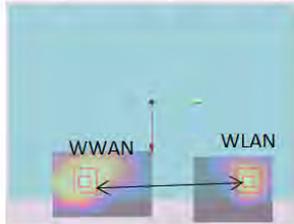


Case 35	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	1.314	0	0.089	-0.0515	-0.178	139.6	1.91	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

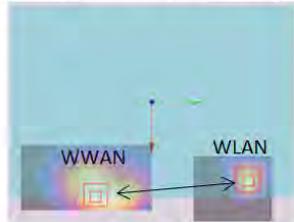


Case 36	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	1.409	0	0.0725	-0.0635	-0.18	150.7	2.00	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

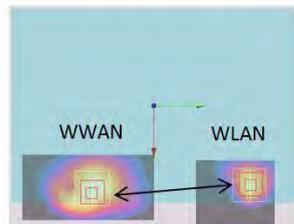

Case 37	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	1.398	0	0.068	-0.059	-0.179	146.3	1.99	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

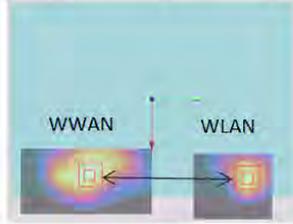


Case 38	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Bottom Face	1.046	0	0.089	-0.045	-0.178	133.2	1.64	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

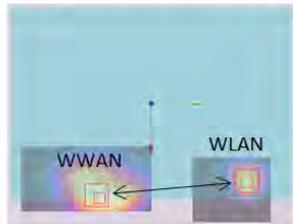


Case 39	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Bottom Face	1.203	0	0.0795	-0.062	-0.178	149.4	1.80	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				



Case 40	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 17	Bottom Face	1.436	0	0.084	-0.055	-0.179	142.7	2.03	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

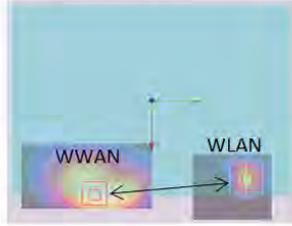


Case 41	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	1.276	0	0.0825	-0.055	-0.179	142.5	1.87	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

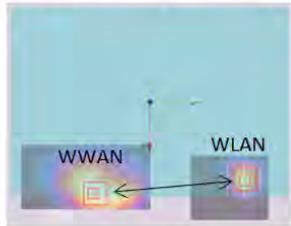

Case 42	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	1.449	0	0.081	-0.05	-0.178	137.4	2.04	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				




Case 43	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 4	Bottom Face	1.41	0	0.0795	-0.0605	-0.178	147.9	2.01	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

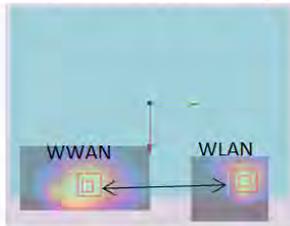


Case 44	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 2	Bottom Face	1.404	0	0.0705	-0.0575	-0.179	144.7	2.00	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				




Case 45	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 25	Bottom Face	1.361	0	0.0765	-0.059	-0.177	146.2	1.96	0.02	Not required
	WLAN2.4GHz		0.595	0	0.0728	0.0872	-0.177				

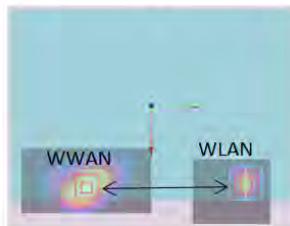


Case 46	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.323	1.1	0.0875	-0.0485	-0.179	123.3	2.55	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

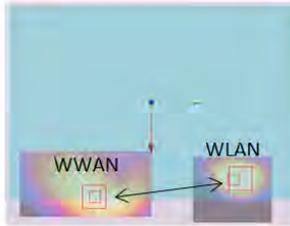


Case 47	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	0.673	1.1	0.0695	-0.0545	-0.179	128.3	1.90	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

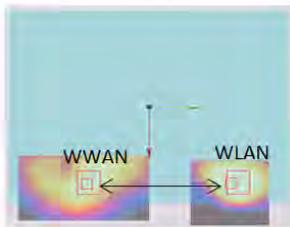


Case 48	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	0.707	1.1	0.0855	-0.058	-0.179	132.5	1.93	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

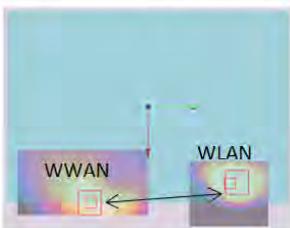

Case 49	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	0.799	1.1	0.085	-0.053	-0.179	127.5	2.03	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

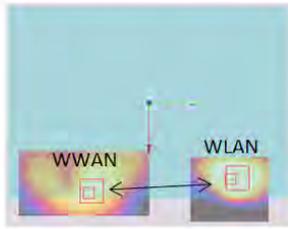


Case 50	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	0.739	1.1	0.068	-0.056	-0.179	129.9	1.97	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

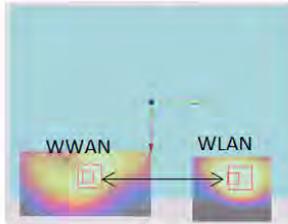


Case 51	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Bottom Face	0.669	1.1	0.0855	-0.05	-0.179	124.6	1.90	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				




Case 52	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Bottom Face	0.652	1.1	0.084	-0.058	-0.179	132.4	1.88	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

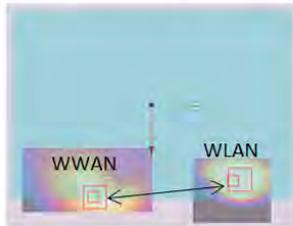


Case 53	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Bottom Face	1.118	1.1	0.0795	-0.0545	-0.179	128.6	2.34	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

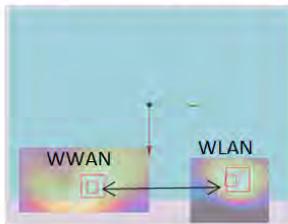


Case 54	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 17	Bottom Face	0.395	1.1	0.081	-0.056	-0.179	130.2	1.62	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

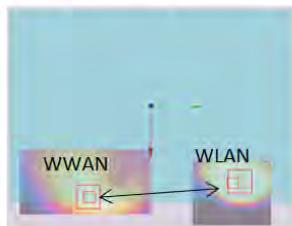


Case 56	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Bottom Face	0.624	1.1	0.084	-0.0515	-0.179	125.9	1.85	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

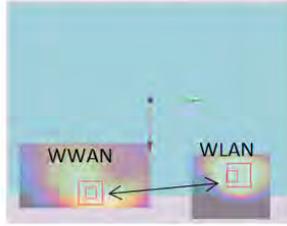


Case 56	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Bottom Face	0.584	1.1	0.0855	-0.058	-0.179	132.5	1.81	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

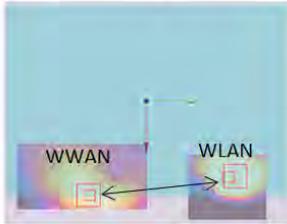

Case 57	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Bottom Face	1.249	1.1	0.0855	-0.0545	-0.179	129.1	2.48	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

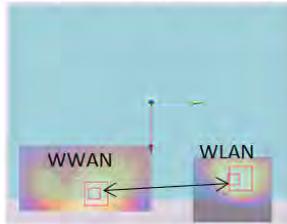


Case 58	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 2	Bottom Face	0.659	1.1	0.0765	-0.053	-0.179	126.9	1.89	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

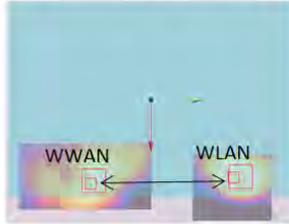


Case 59	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band 25	Bottom Face	0.636	1.1	0.078	-0.053	-0.179	127.0	1.86	0.02	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				




Case 60	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	GSM850	Edge 1	1.403	0.7	-0.001	-0.0485	-0.18	152.5	1.66	0.01	Not required
	WLAN2.4GHz		0.257	0	-0.0036	0.104	-0.18				

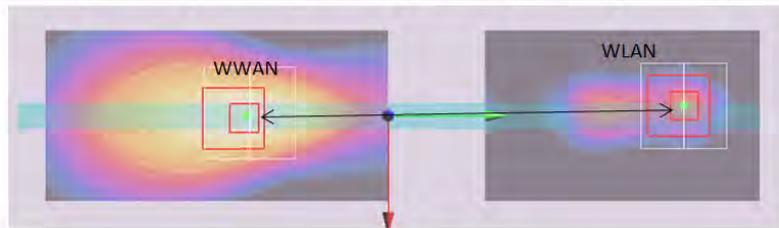


Case 61	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM850	Bottom Face	1.47	0	0.086	-0.052	-0.179	126.6	2.70	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

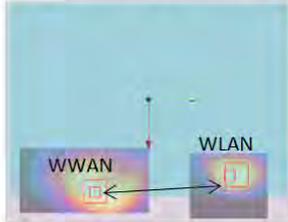


Case 62	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	GSM1900	Bottom Face	1.46	0	0.071	-0.0605	-0.178	134.3	2.69	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

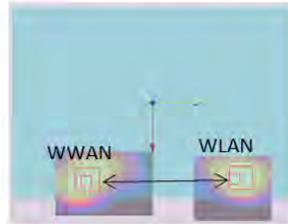


Case 63	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	1.314	0	0.089	-0.0515	-0.178	126.5	2.54	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

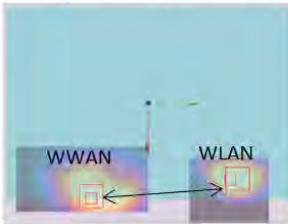

Case 64	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Bottom Face	1.409	0	0.0725	-0.0635	-0.18	137.3	2.64	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

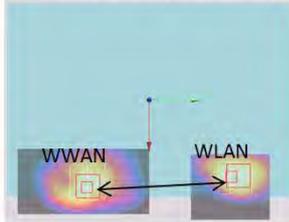


Case 65	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Bottom Face	1.398	0	0.068	-0.059	-0.179	132.9	2.62	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

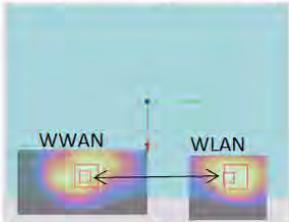


Case 66	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Bottom Face	1.046	0	0.089	-0.045	-0.178	120.1	2.27	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				




Case 67	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Bottom Face	0.98	0	0.0825	-0.0535	-0.178	127.8	2.21	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

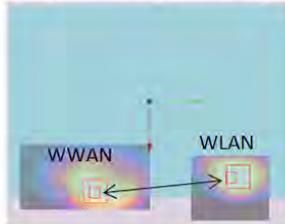


Case 68	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Bottom Face	1.203	0	0.0795	-0.062	-0.178	136.0	2.43	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

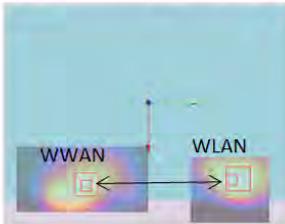


Case 69	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band17	Bottom Face	1.436	0	0.084	-0.055	-0.179	129.4	2.66	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

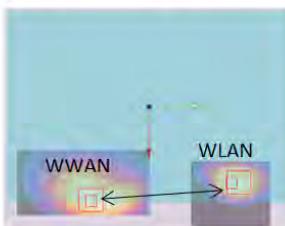


Case 70	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band13	Bottom Face	1.276	0	0.0825	-0.055	-0.179	129.3	2.50	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

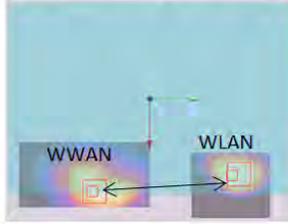


Case 71	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band5	Bottom Face	1.449	0	0.081	-0.05	-0.178	124.2	2.68	0.04	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

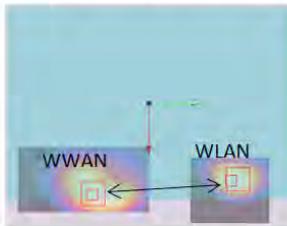


Case 72	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band4	Bottom Face	1.41	0	0.0795	-0.0605	-0.178	134.5	2.64	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

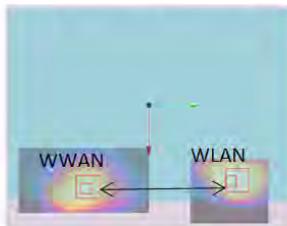


Case 73	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band2	Bottom Face	1.404	0	0.0705	-0.0575	-0.179	131.3	2.63	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

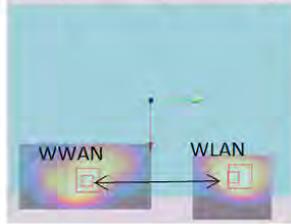


Case 74	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band25	Bottom Face	1.361	0	0.0765	-0.059	-0.177	132.9	2.59	0.03	Not required
	WLAN2.4GHz		1.226	0	0.0716	0.0738	-0.177				

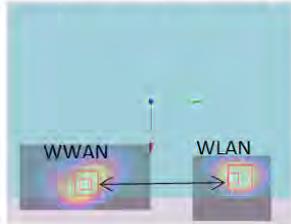


Case 75	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
	LTE Band2	Edge 1	1.396	0	-0.0036	0.104	-0.18	167.5	1.65	0.01	Not required
	WLAN2.4GHz		0.257	0	-0.001	-0.0635	-0.179				

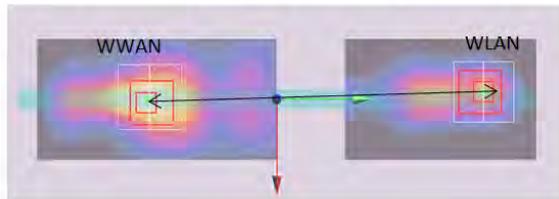

Case 91	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
				(cm)	X	Y	Z				
	LTE Band2	Edge 1	1.396	0	-0.001	-0.0635	-0.179	136.3	1.63	0.02	Not required
	WLAN2.4GHz		0.237	0	-0.0012	0.0728	-0.179				

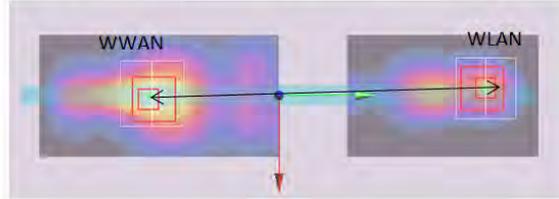

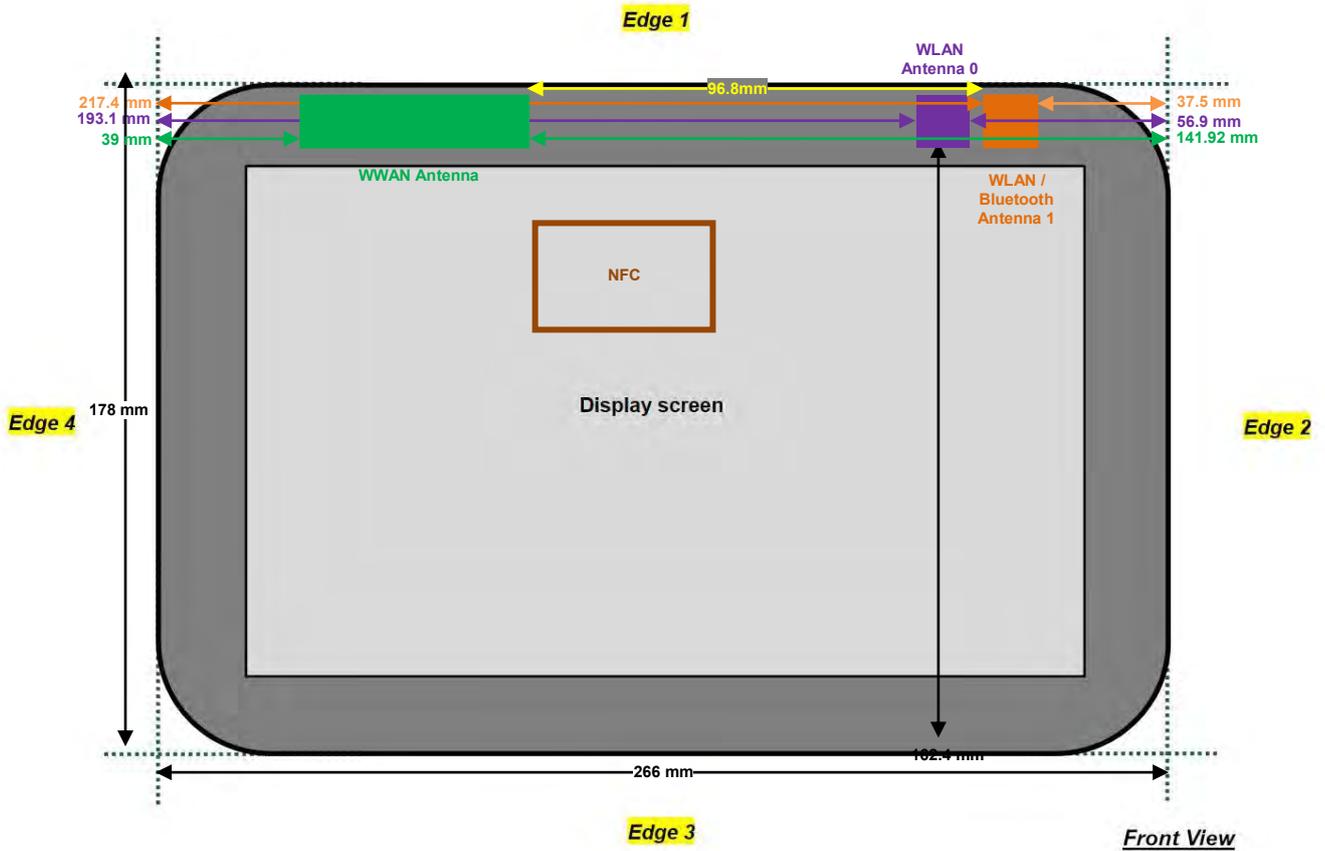

Note:

1. For Bluetooth SPLSR analysis, the minimum distance of "WWAN to Bluetooth antenna1" is used for conservative SPLSR calculation.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Case 76	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	GSM850		1.323	1.1				
	BT		0.378	0				

Case 77	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	LTE Band4		1.249	1.1				
	BT		0.378	0				

Case 78	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	GSM850		1.403	0.7				
	BT		0.378	0				



Case 79	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	GSM850	Bottom Face	1.470	0	96.8	1.85	0.03	Not required
	BT		0.378	0				

Case 80	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	GSM1900	Bottom Face	1.460	0	96.8	1.84	0.03	Not required
	BT		0.378	0				

Case 81	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	WCDMA V	Bottom Face	1.314	0	96.8	1.69	0.02	Not required
	BT		0.378	0				

Case 82	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	WCDMA II	Bottom Face	1.398	0	96.8	1.78	0.02	Not required
	BT		0.378	0				

Case 83	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	LTE Band 17	Bottom Face	1.436	0	96.8	1.81	0.03	Not required
	BT		0.378	0				

Case 84	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	LTE Band 13	Bottom Face	1.276	0	96.8	1.65	0.02	Not required
	BT		0.378	0				

Case 85	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	LTE Band 5	Bottom Face	1.449	0	96.8	1.83	0.03	Not required
	BT		0.378	0				

Case 86	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
				(cm)				
	LTE Band 4	Bottom Face	1.410	0	96.8	1.79	0.02	Not required
	BT		0.378	0				

Case 87	Band	Position	SAR	Gap	Minimum	Summed	SPLSR	Simultaneous
---------	------	----------	-----	-----	---------	--------	-------	--------------



			(W/kg)	(cm)	distance (mm)	SAR (W/kg)	Result	SAR
	LTE Band 2	Bottom Face	1.404	0	96.8	1.78	0.02	Not required
	BT		0.378	0				

Case 88	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	LTE Band 25		1.361	0				
	BT	0.378	0					

Case 89	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	GSM1900		1.240	0				
	BT	0.378	0					

Case 90	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	LTE Band 2		1.396	0				
	BT	0.378	0					

Case 91	Band	Position	SAR (W/kg)	Gap (cm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Result	Simultaneous SAR
	WCDMA IV		1.409	0				
	BT	0.378	0					

Test Engineer : Nick Yu, Tom Jiang, Aaron Chen, San Lin and Angelo Chang

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 14.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 15.1. Uncertainty Budget for frequency range 300 MHz to 3 GHz



15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r01, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", May 2013
- [7] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [8] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", May 2013
- [9] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [10] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [11] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [12] FCC KDB 865664 D01 v01r02, "SAR Measurement Requirements for 100 MHz to 6 GHz", May 2013.