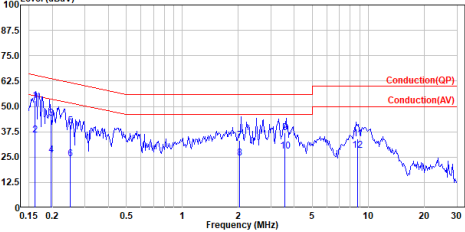
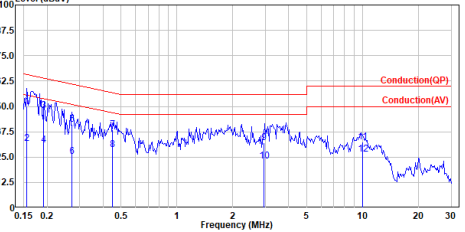


Appendix A. Test Result of AC Power Line Conducted Emission


TX_BT3M_2440MHz_Line								TX_BT3M_2440MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BT3M_2440MHz test by :Kevin Date: 2025-07-21 								Site :HY-SR01 Condition :Neutral Mode :TX_BT3M_2440MHz test by :Kevin Date: 2025-07-21 							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.161	52.69	65.42	-12.73	43.05	9.64	QP	1	0.156	49.65	65.68	-16.03	40.03	9.62	QP
2	0.161	35.93	55.42	-19.49	26.29	9.64	Average	2	0.156	31.72	55.68	-23.96	22.10	9.62	Average
3	0.197	44.00	63.73	-19.73	34.36	9.64	QP	3	0.192	47.78	63.97	-16.19	38.16	9.62	QP
4	0.197	25.87	53.73	-27.86	16.23	9.64	Average	4	0.192	30.99	53.97	-22.98	21.37	9.62	Average
5	0.249	40.22	61.79	-21.57	30.57	9.65	QP	5	0.272	41.32	61.06	-19.74	31.69	9.63	QP
6	0.249	24.07	51.79	-27.72	14.42	9.65	Average	6	0.272	25.29	51.06	-25.77	15.66	9.63	Average
7	2.036	33.19	56.00	-22.81	23.41	9.78	QP	7	0.452	38.60	56.84	-18.24	28.97	9.63	QP
8	2.036	24.50	46.00	-21.50	14.72	9.78	Average	8	0.452	28.74	46.84	-18.10	19.11	9.63	Average
9	3.546	37.11	56.00	-18.89	27.14	9.97	QP	9	2.951	32.16	56.00	-23.84	22.27	9.89	QP
10	3.546	27.80	46.00	-18.20	17.83	9.97	Average	10	2.951	22.85	46.00	-23.15	12.96	9.89	Average
11	8.720	33.90	60.00	-26.10	23.70	10.20	QP	11	10.010	32.36	60.00	-27.64	22.13	10.23	QP
12	8.720	28.20	50.00	-21.80	18.00	10.20	Average	12	10.010	26.43	50.00	-23.57	16.20	10.23	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
GFSK	2402	0.96	-
	2441	0.96	-
	2480	0.96	-
8DPSK	2402	1.27	-
	2441	1.27	-
	2480	1.27	-

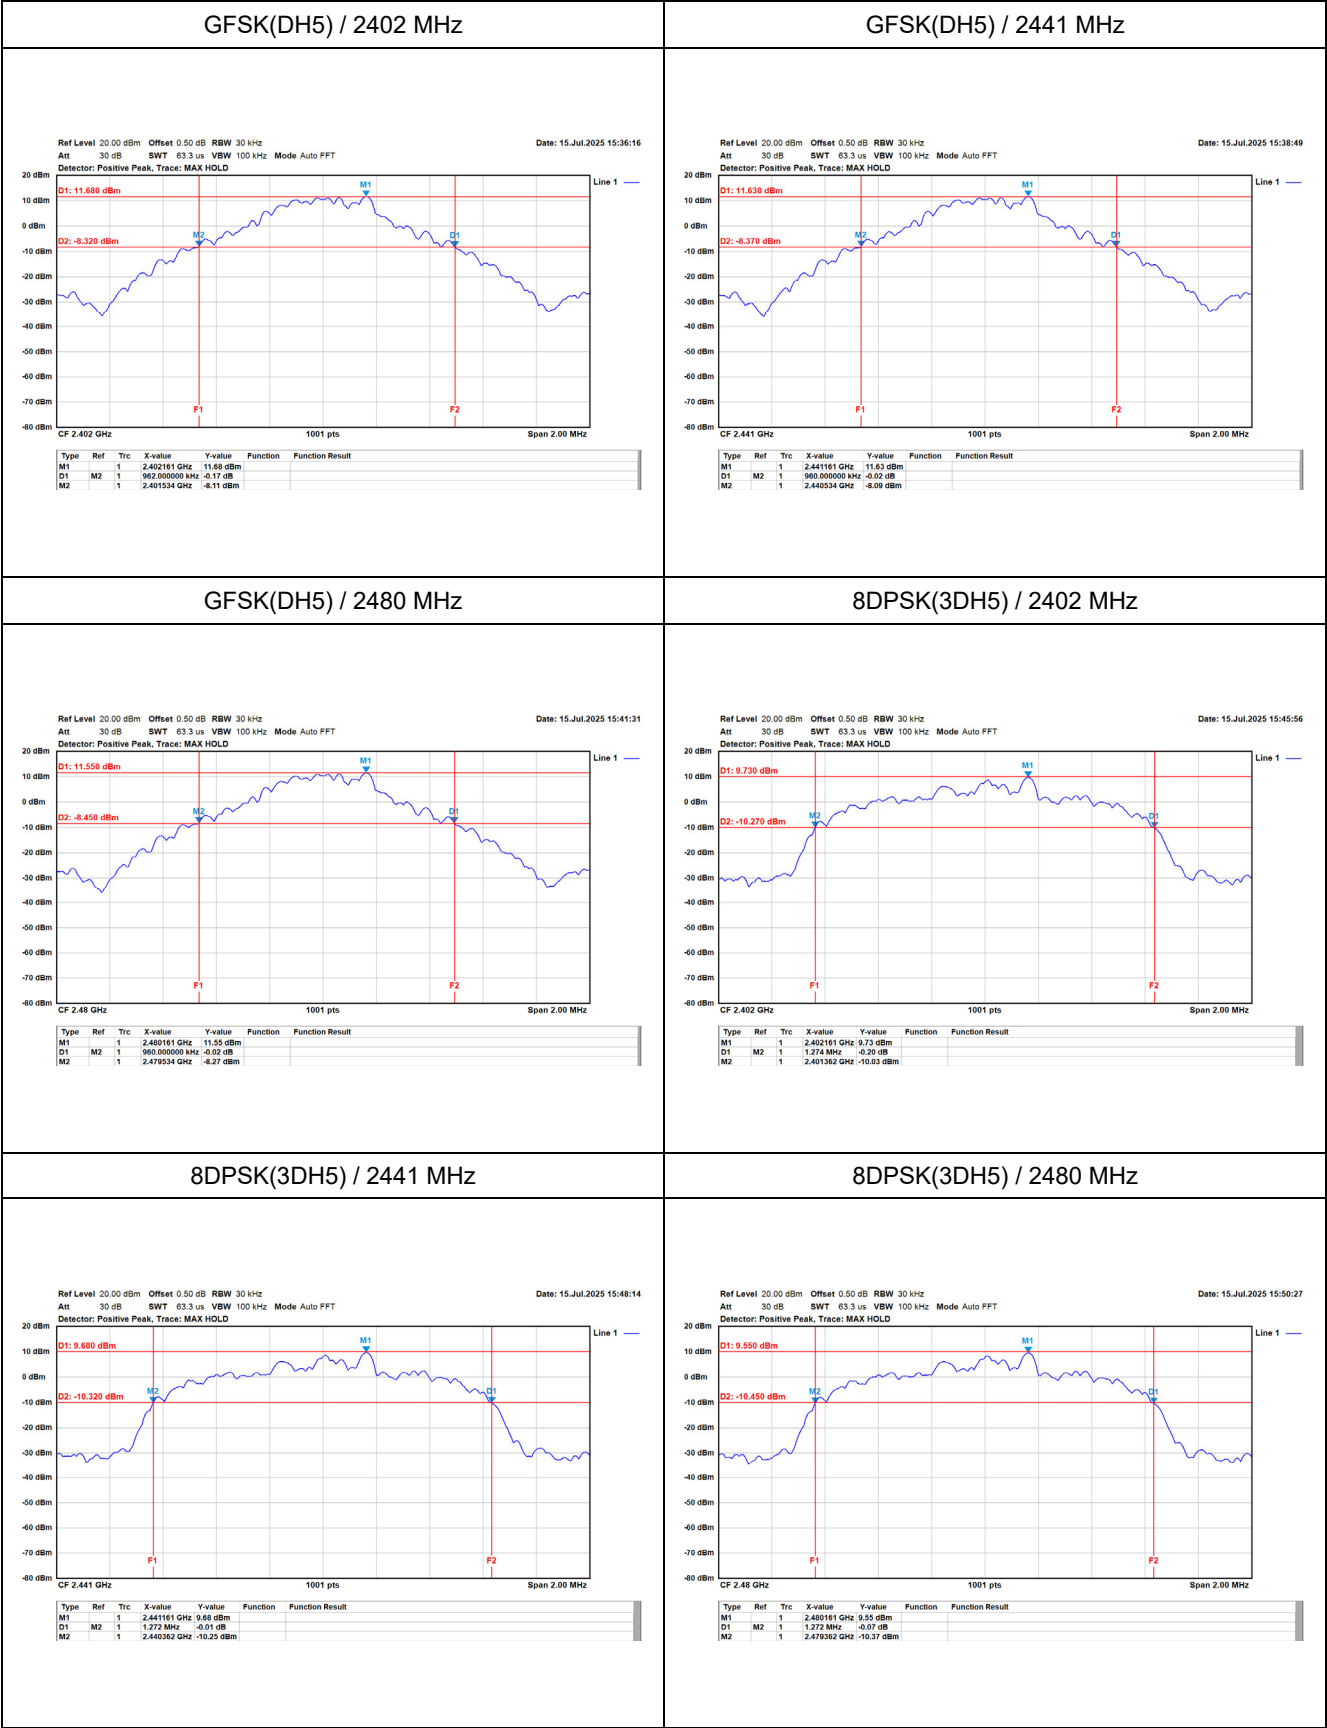

Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	0.99	0.641	Pass
	2441	0.99	0.640	Pass
	2480	0.99	0.640	Pass
8DPSK	2402	0.99	0.849	Pass
	2441	0.99	0.848	Pass
	2480	0.99	0.848	Pass

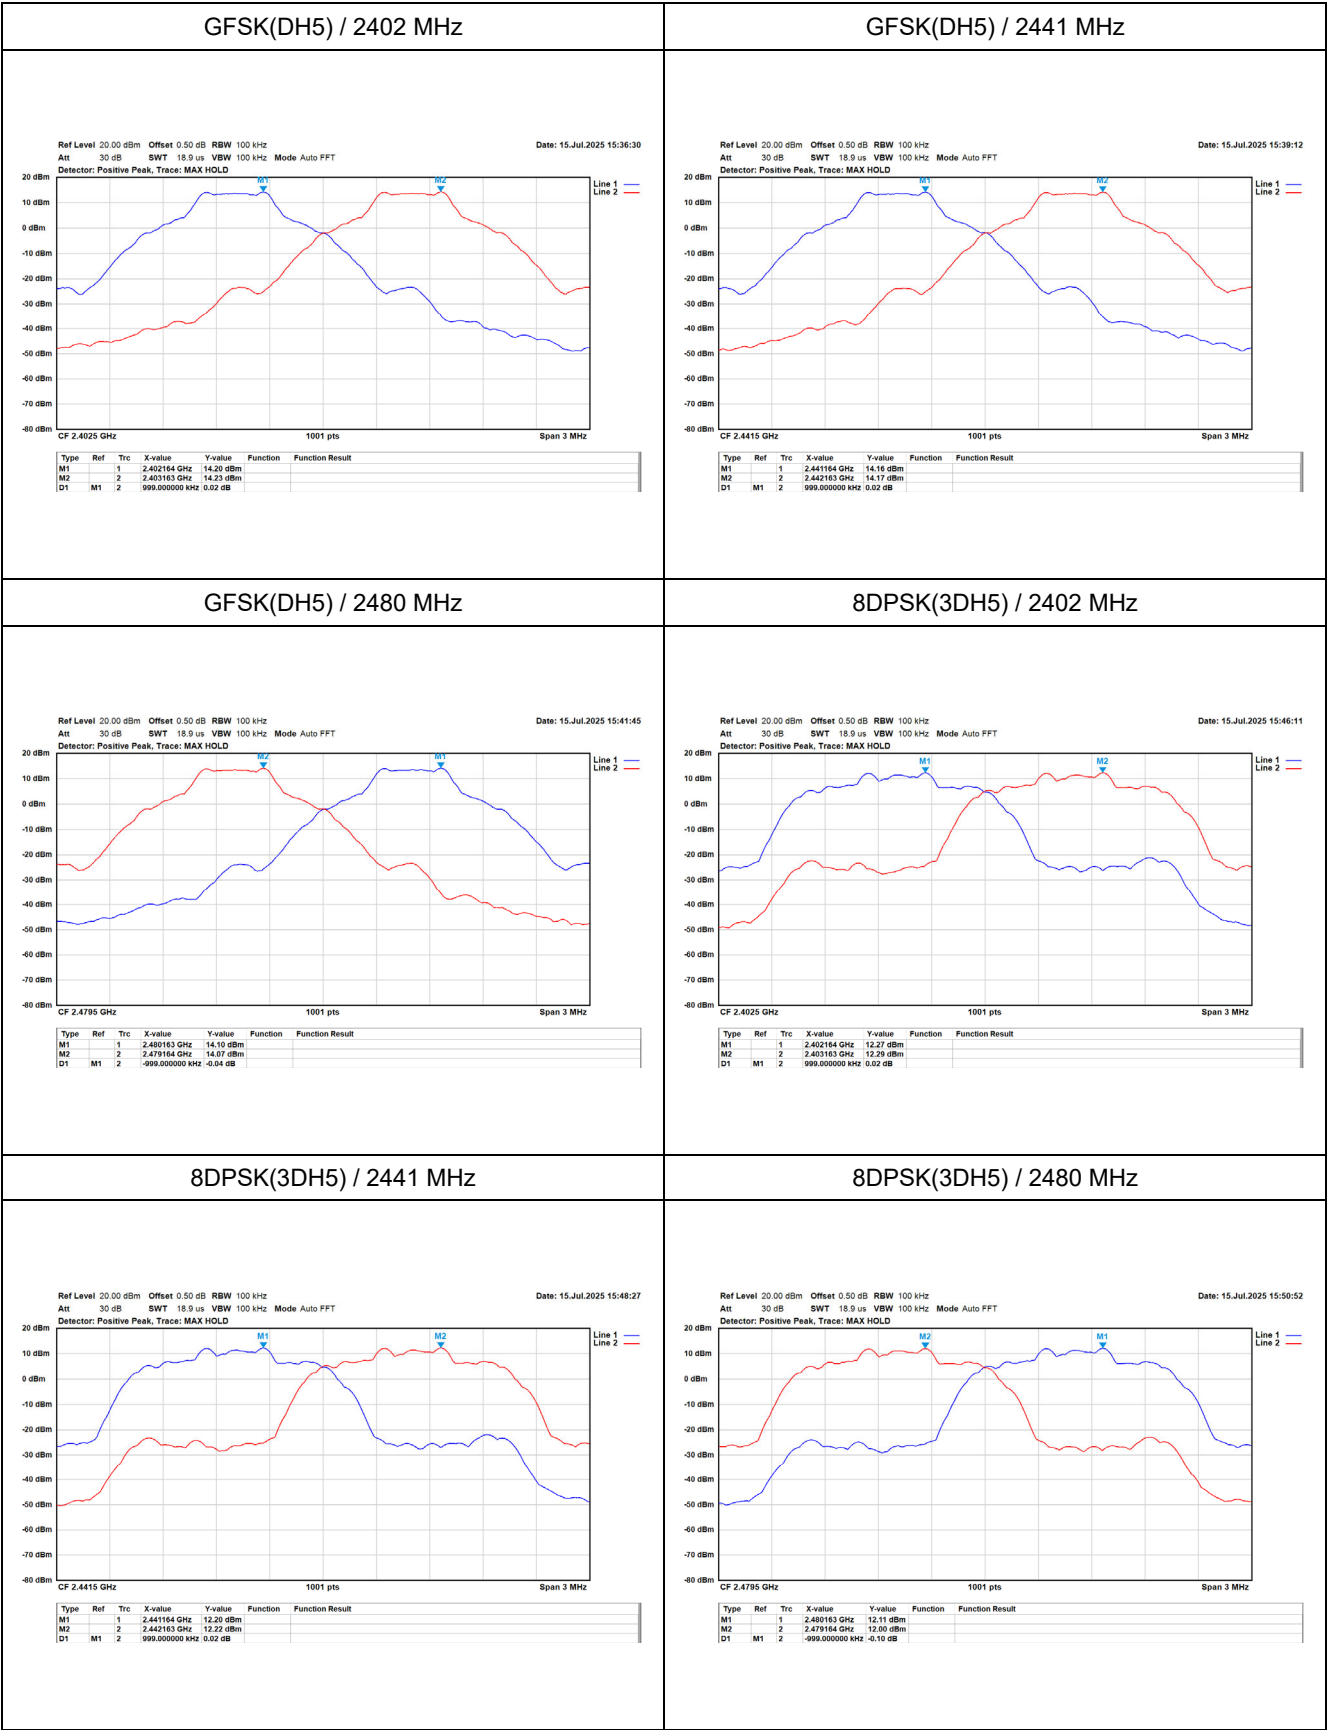


Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	14.97	21.00	Pass
	2441	15.00	21.00	Pass
	2480	14.99	21.00	Pass
8DPSK	2402	13.50	21.00	Pass
	2441	13.25	21.00	Pass
	2480	13.13	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

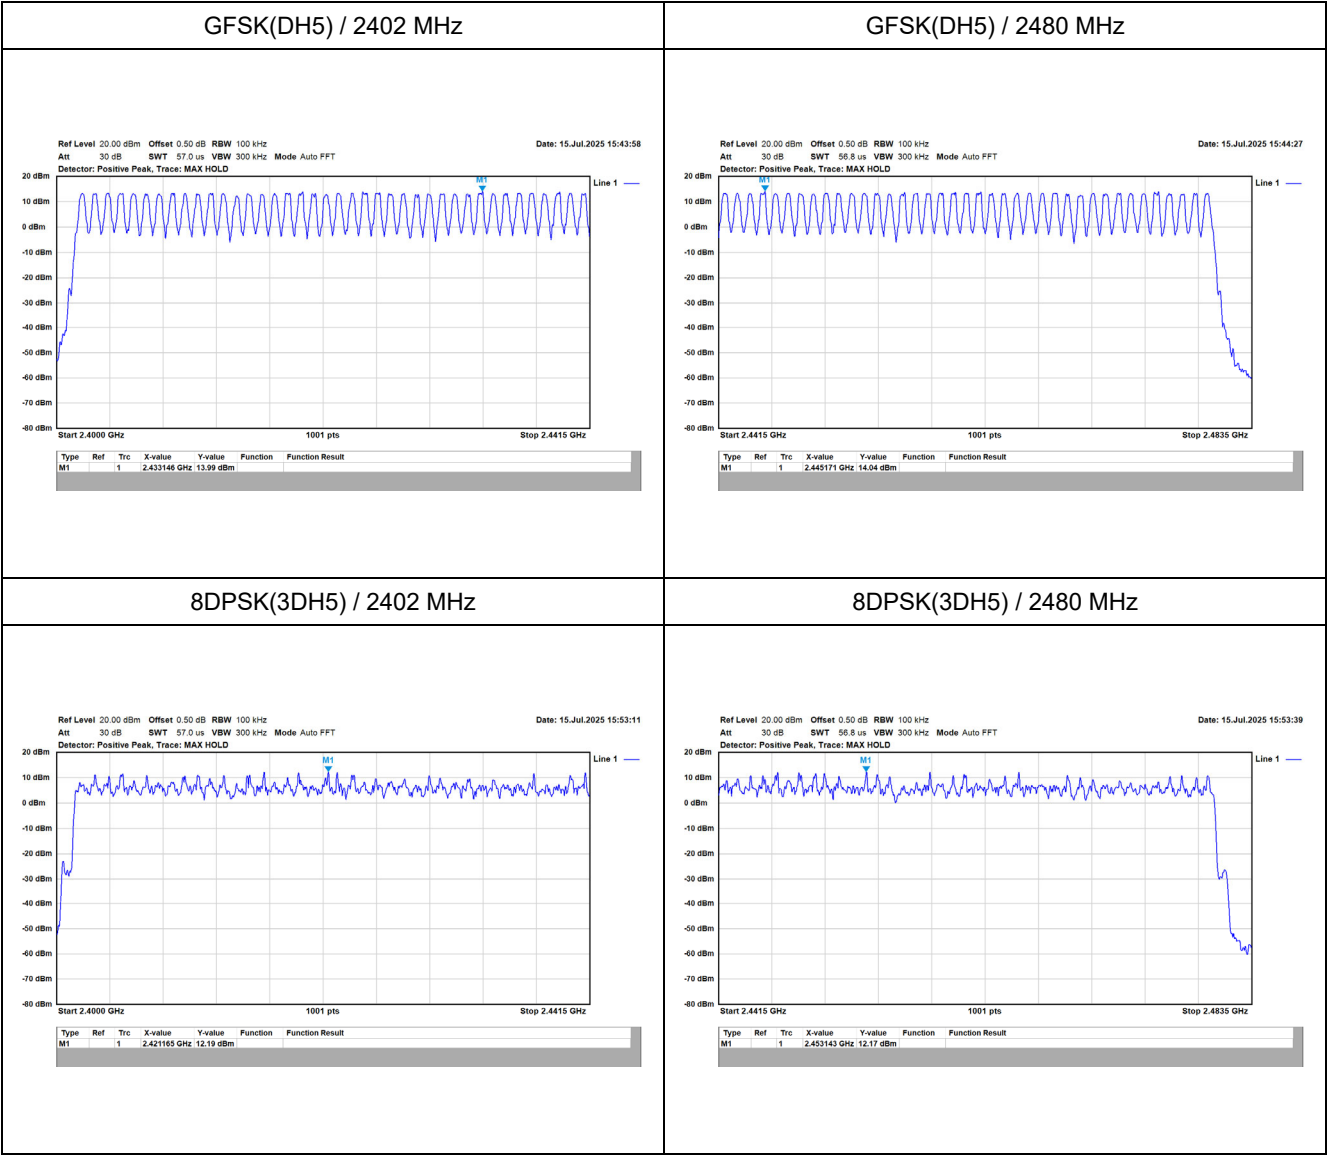


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
Test Result: The occupancy time of each highest, middle and lowest channel is less than 0.4 sec, and corresponds to the standard.	

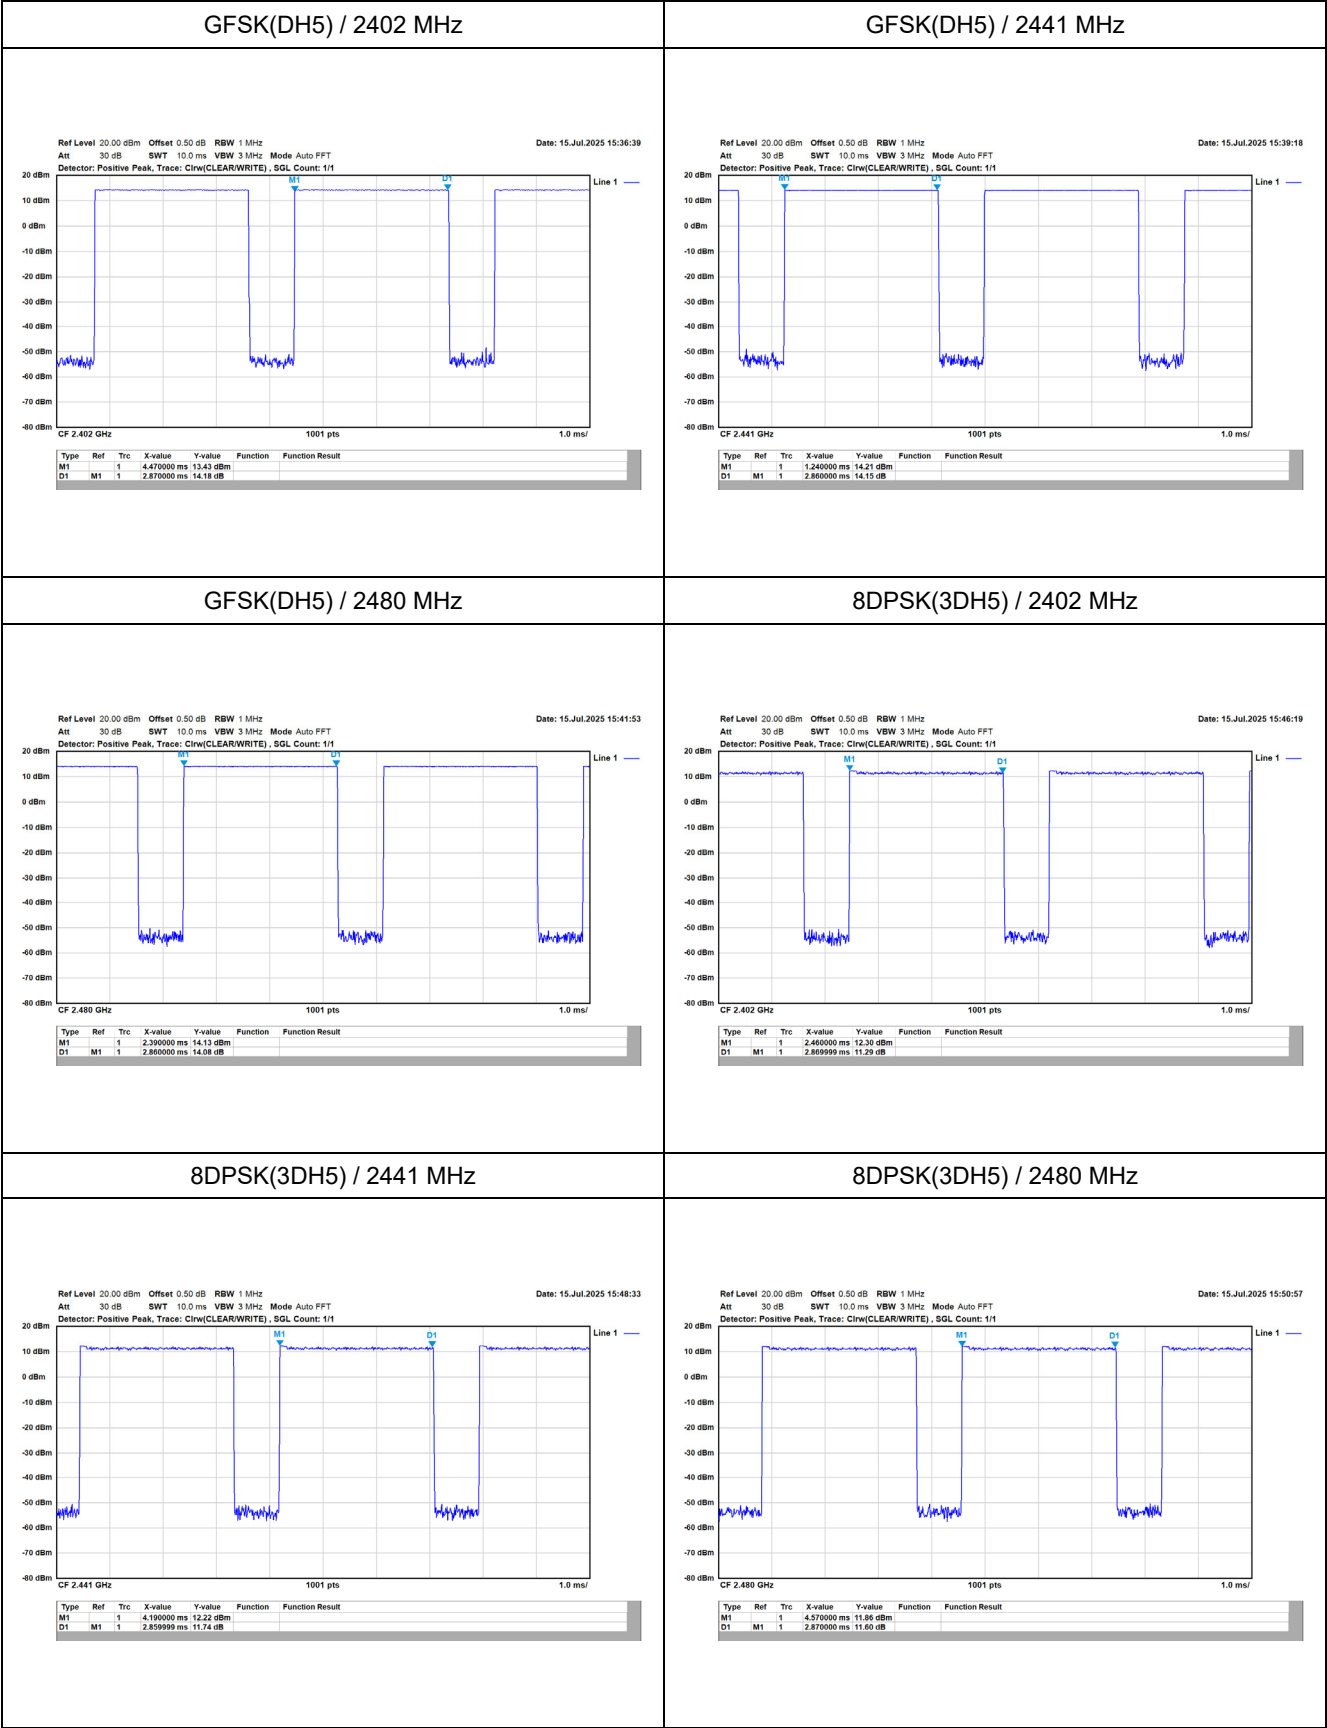


Appendix G. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass

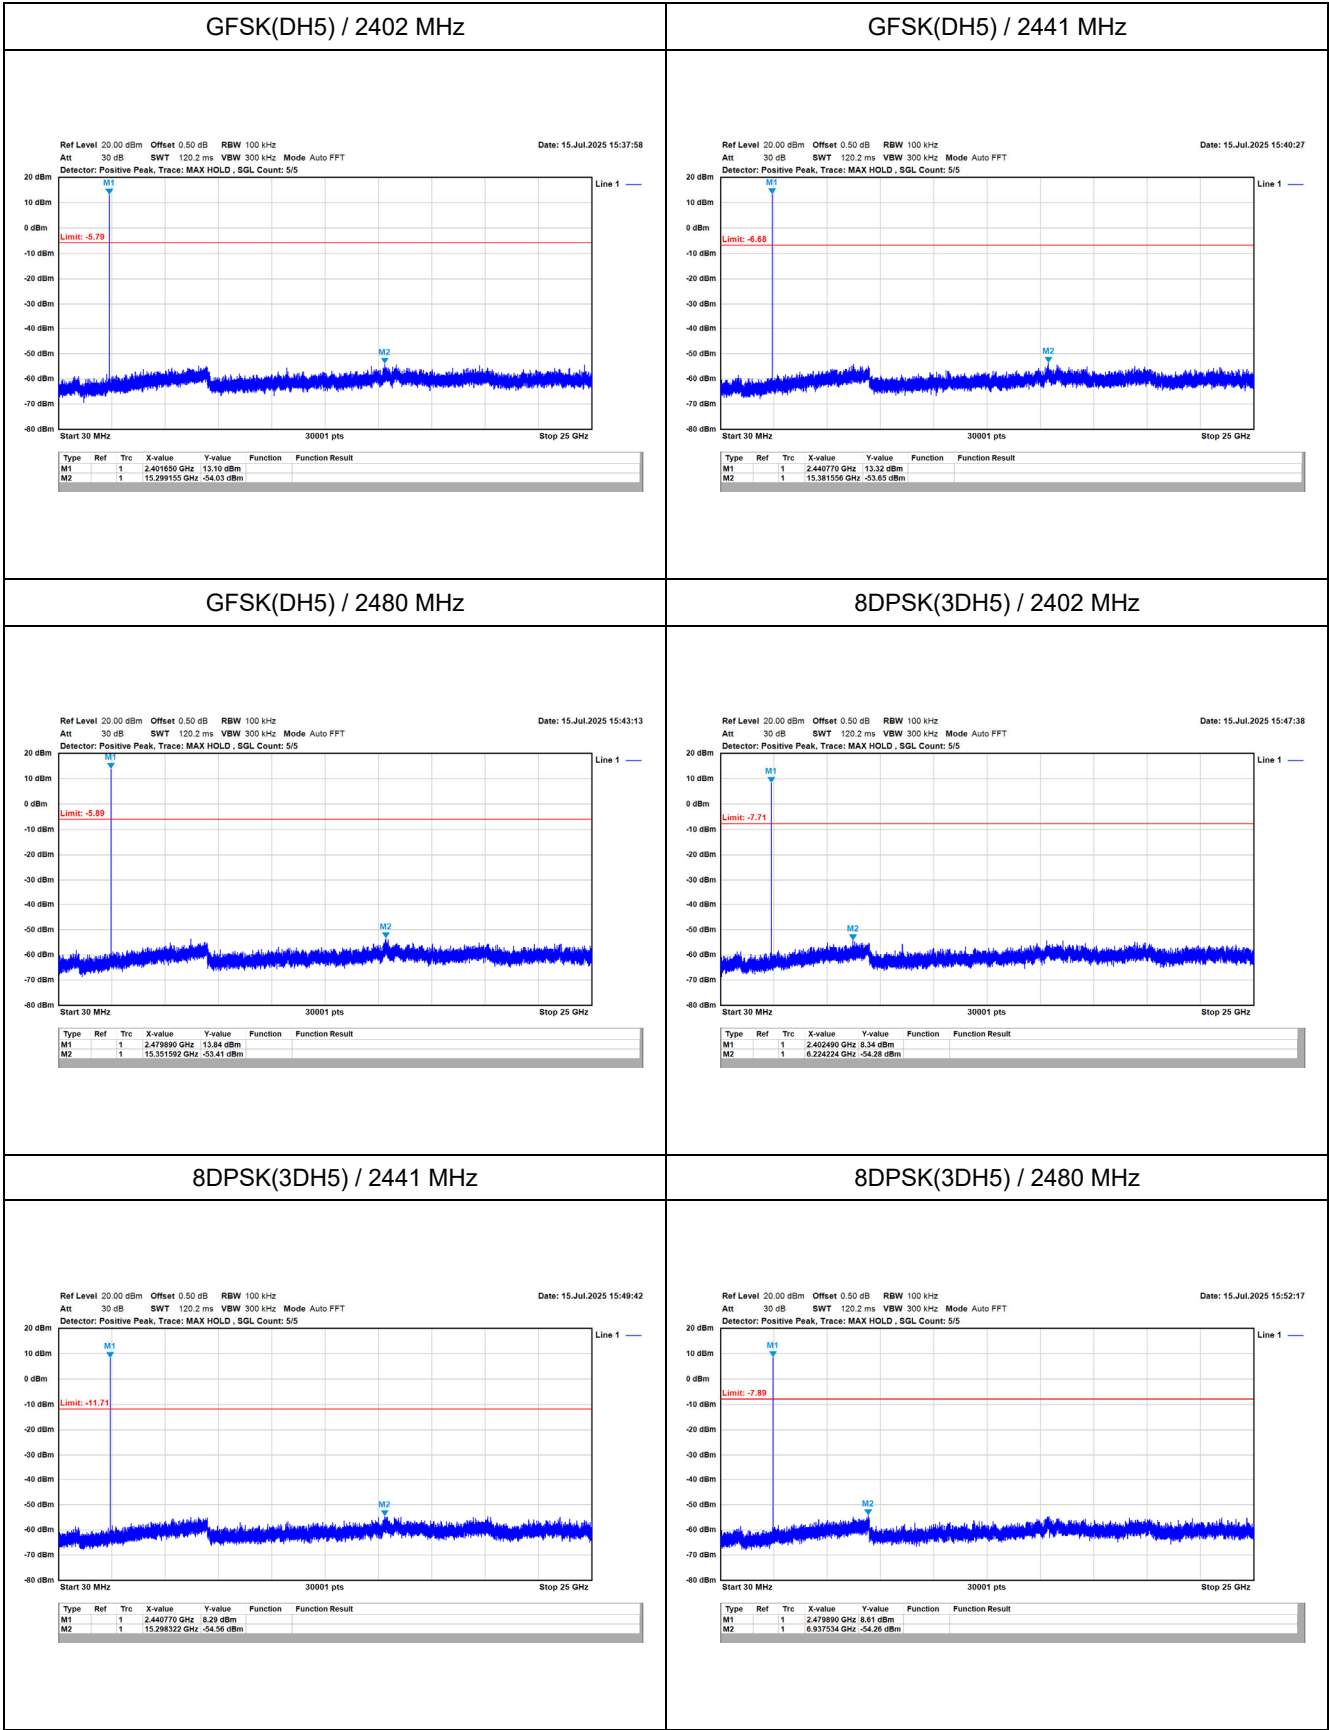


GFSK(DH5) (Band Edge) / 2402 MHz

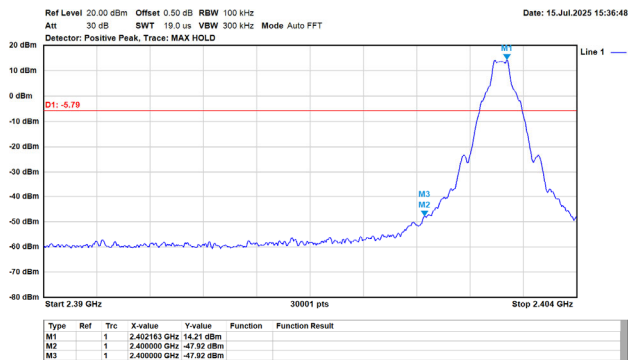


GFSK(DH5) (Band Edge) / 2480 MHz

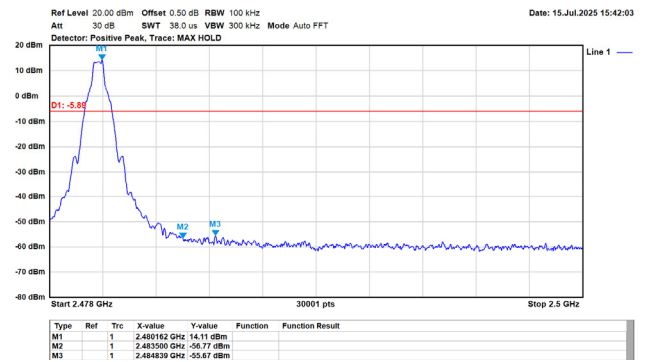


8DPSK(3DH5) (Band Edge) / 2402 MHz

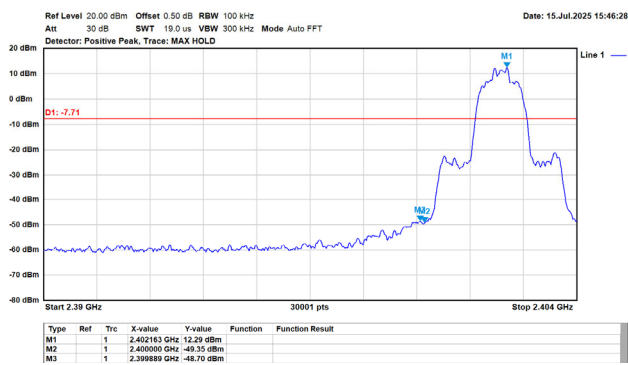


8DPSK(3DH5) (Band Edge) / 2480 MHz

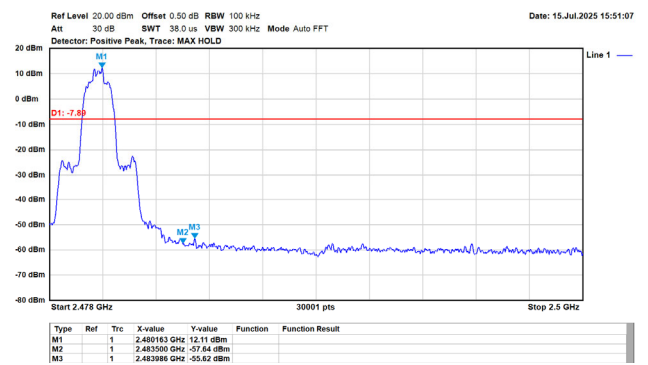


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

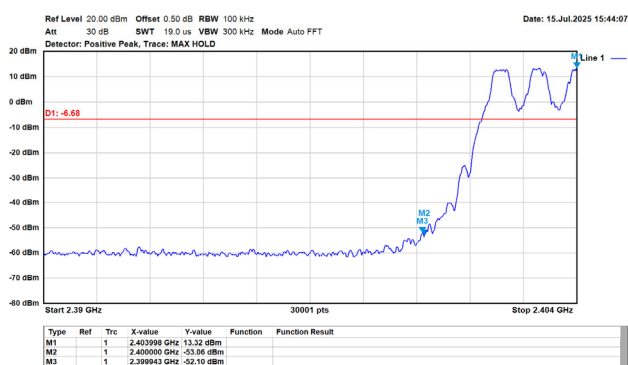


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

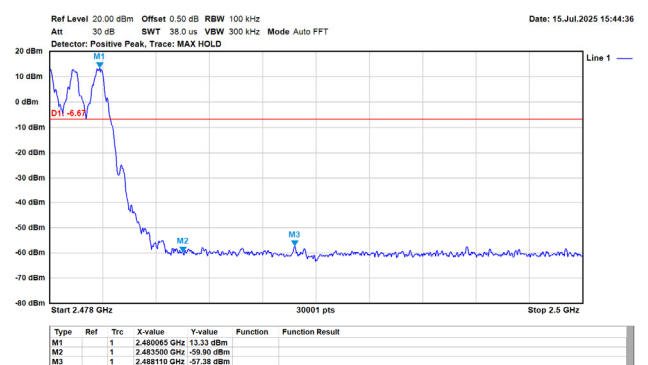

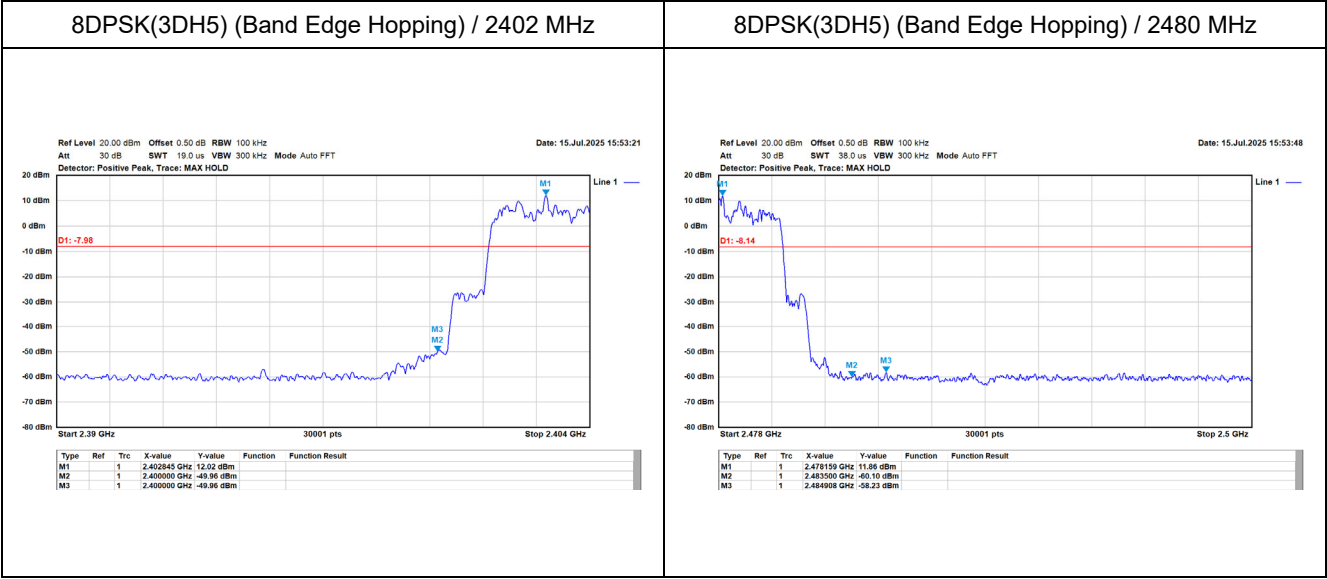

Appendix H. Test Result of Radiated Emission


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT1M_2402MHz
Test BY :Ashton

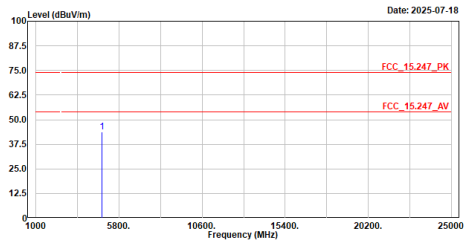

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	43.62	74.00	-30.38	58.57	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT1M_2402MHz
Test BY :Ashton

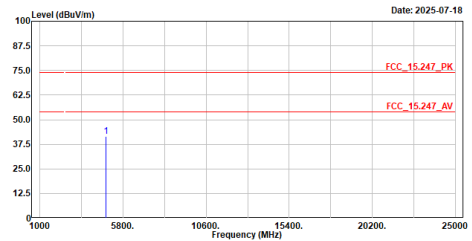

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	41.68	74.00	-32.32	56.63	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT1M_2441MHz
Test BY :Ashton

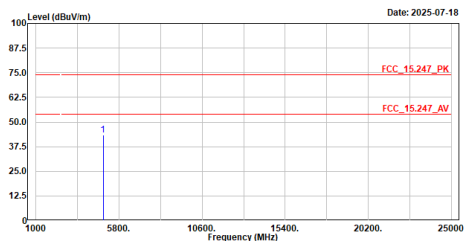

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	43.31	74.00	-30.69	57.88	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT1M_2441MHz
Test BY :Ashton

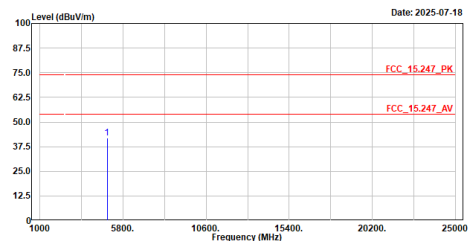

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	41.85	74.00	-32.15	56.42	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2480MHz
Test BY :Ashton

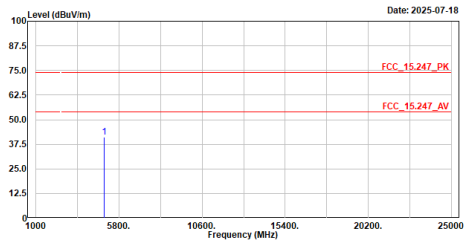

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	4960.000	41.28	74.00	-32.72	55.50	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2480MHz
Test BY :Ashton

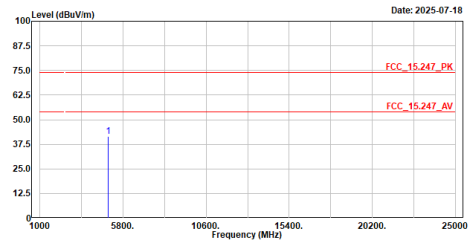

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	4960.000	41.56	74.00	-32.44	55.78	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2480MHz
Test BY :Ashton

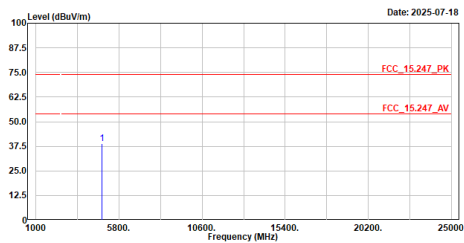

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	4804.000	38.96	74.00	-35.04	53.91	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2480MHz
Test BY :Ashton

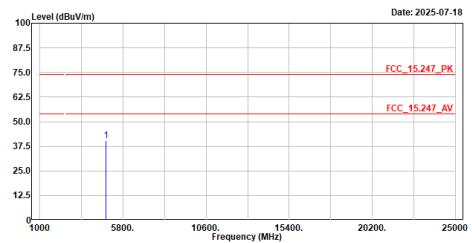

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	4804.000	40.36	74.00	-33.64	55.31	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2441MHz
Test BY :Ashton

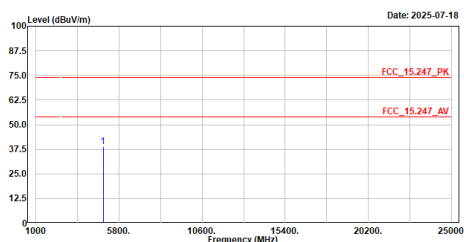


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4882.000	38.93	74.00	-35.07	53.50	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2441MHz
Test BY :Ashton

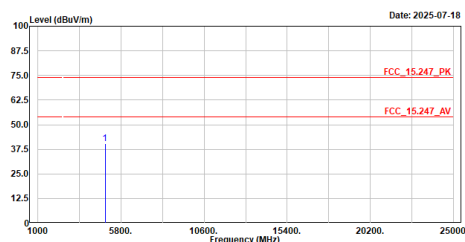


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4882.000	40.28	74.00	-33.72	54.85	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2480MHz
Test BY :Ashton

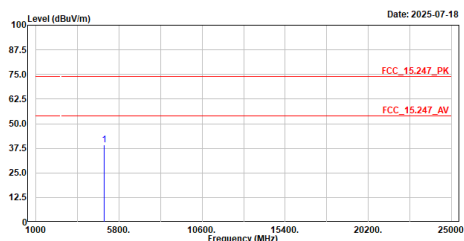


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4960.000	39.20	74.00	-34.80	53.42	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2480MHz
Test BY :Ashton

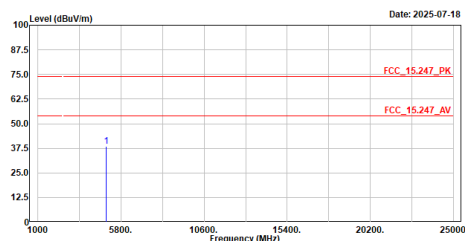


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.67	74.00	-35.33	52.89	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2440MHz
Test BY :Bob

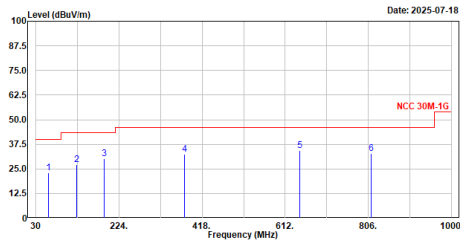


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	59.100	23.00	40.00	-17.00	47.36	-24.36	QP
2	126.030	27.21	43.50	-16.29	53.02	-25.81	QP
3	189.080	30.30	43.50	-13.20	56.80	-26.50	QP
4	377.260	32.32	46.00	-13.68	53.16	-20.84	QP
5	646.920	34.37	46.00	-11.63	49.31	-14.94	QP
6	812.790	32.79	46.00	-13.21	45.27	-12.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2440MHz
Test BY :Bob

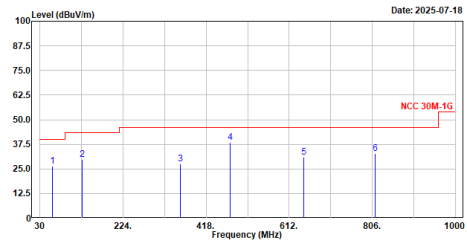


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	60.070	26.57	40.00	-13.43	50.97	-24.40	QP
2	128.940	29.71	43.50	-13.79	55.23	-25.52	QP
3	357.860	27.66	46.00	-18.34	49.47	-21.81	QP
4	474.260	30.46	46.00	-15.54	56.93	-18.47	QP
5	646.920	30.76	46.00	-15.24	45.70	-14.94	QP
6	812.790	32.87	46.00	-13.13	45.35	-12.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2402MHz
 Test BY :Ashton

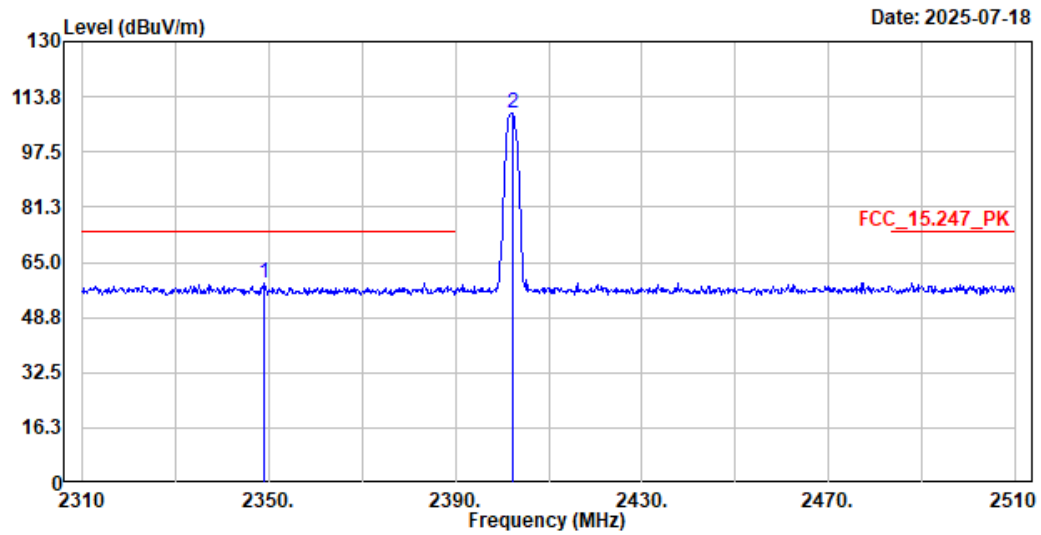

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2348.800	58.97	74.00	-15.03	28.55	30.42	Peak
2	2402.200	108.78	-----	-----	78.32	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2348.8	58.97	-30.755	28.215	-25.785	54.000
2402.2	108.78	-30.755	78.025	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2402MHz
 Test BY :Ashton

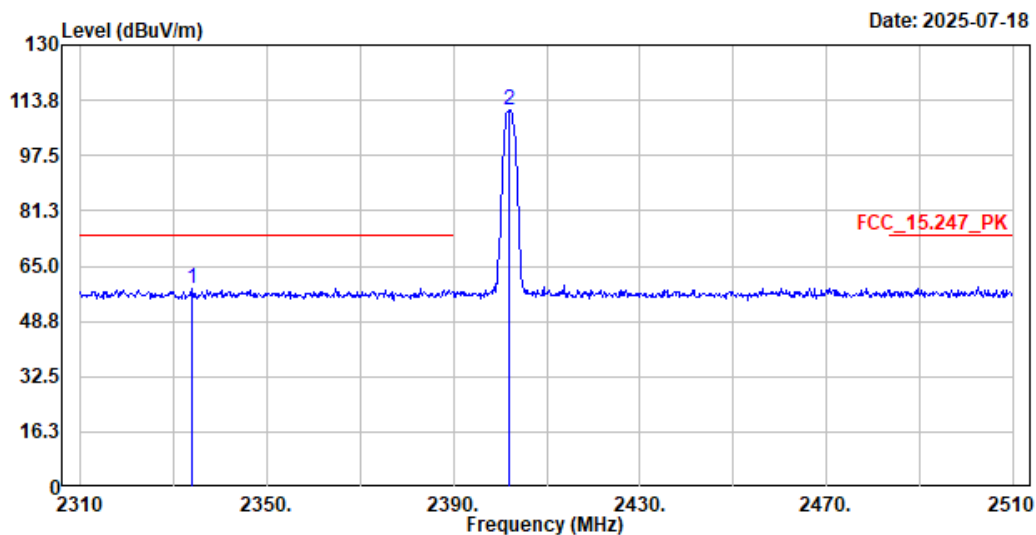

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level		
				dB	dBuV	dB/m	
1	2333.800	58.53	74.00	-15.47	28.06	30.47	Peak
2	2402.000	111.04	-----	-----	80.58	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2333.8	58.53	-30.755	27.775	-26.225	54.000
2402	111.04	-30.755	80.285	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2480MHz
 Test BY :Ashton

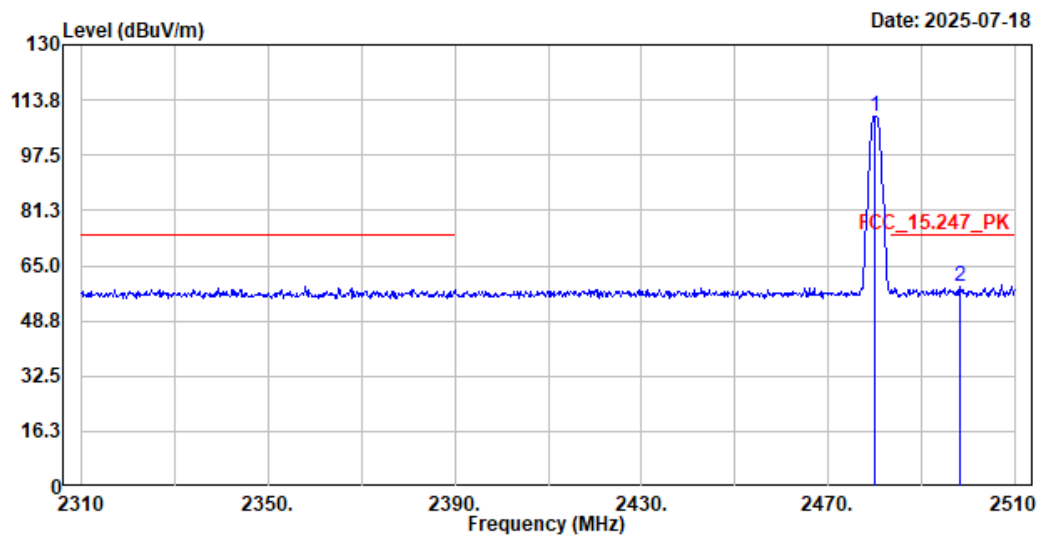

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	108.91	-----	-----	78.52	30.39	Peak
2	2498.400	58.77	74.00	-15.23	28.26	30.51	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	108.91	-30.755	78.155	--	--
2498.4	58.77	-30.755	28.015	-25.985	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2480MHz
 Test BY :Ashton

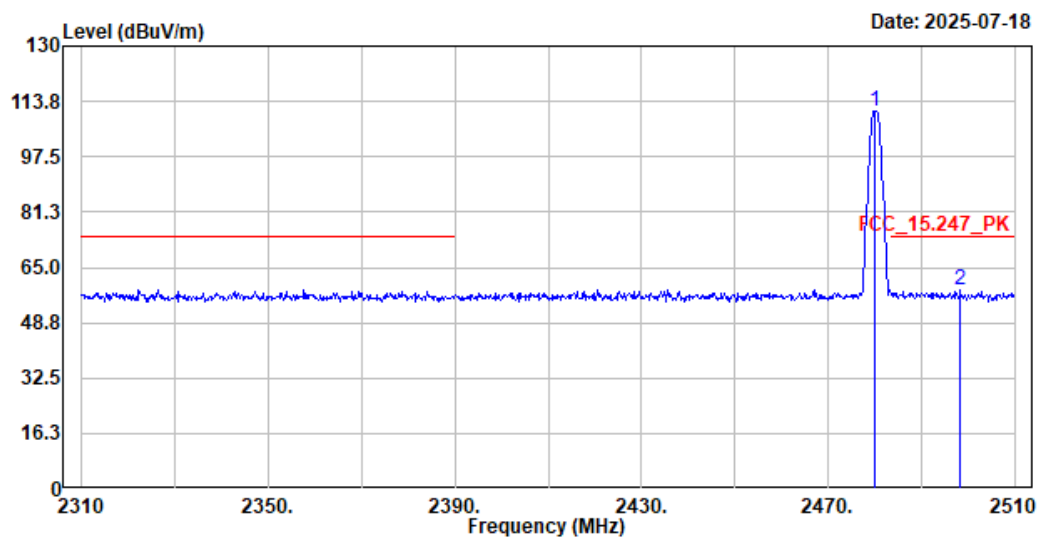

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	110.79	-----	-----	80.40	30.39	Peak
2	2498.400	58.62	74.00	-15.38	28.11	30.51	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	110.79	-30.755	80.035	--	--
2498.4	58.62	-30.755	27.865	-26.135	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2402MHz
 Test BY :Ashton

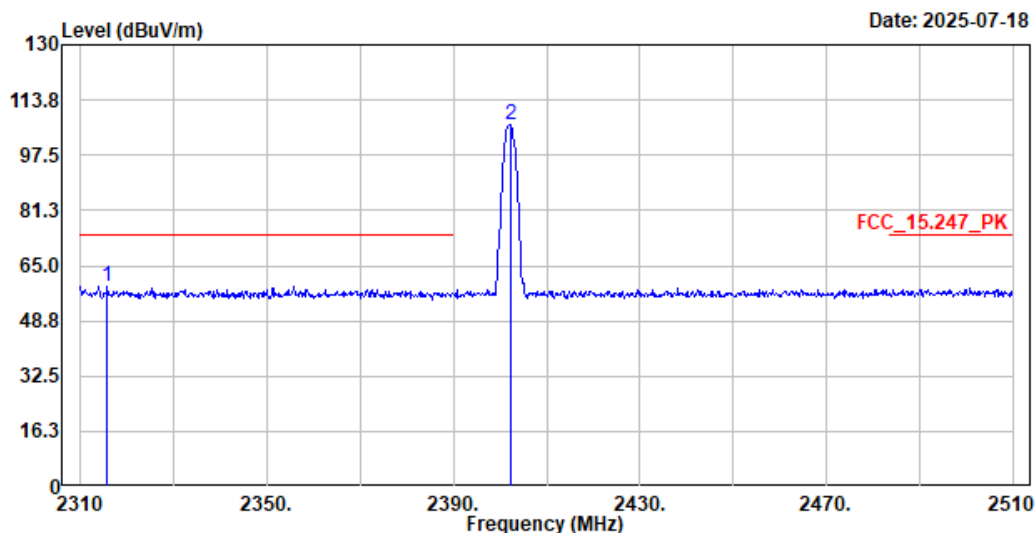

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2315.800	58.84	74.00	-15.16	28.23	30.61	Peak
2	2402.200	106.44	-----	-----	75.98	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2315.8	58.84	-30.755	28.085	-25.915	54.000
2402.2	106.44	-30.755	75.685	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT3M_2402MHz
 Test BY :Ashton

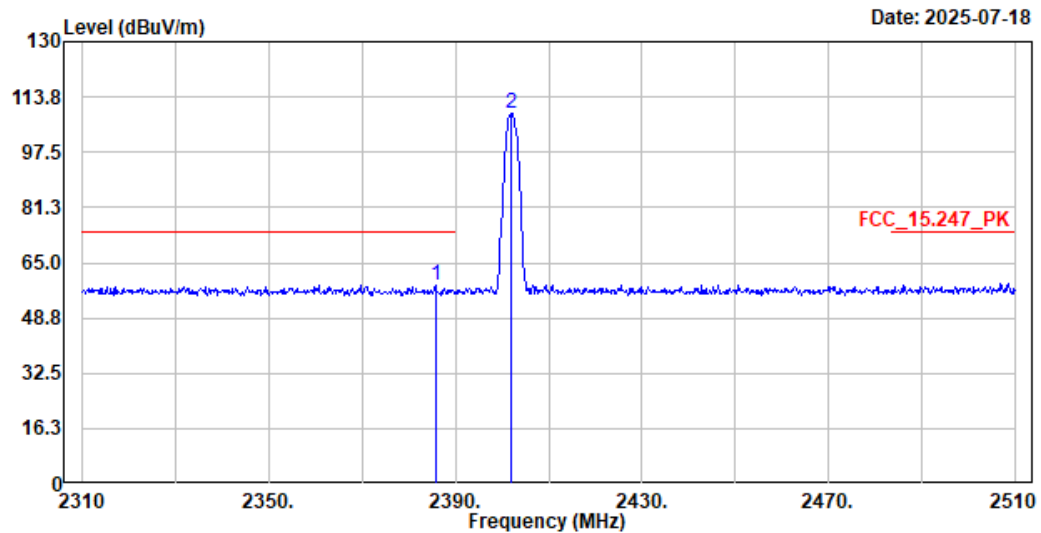

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	58.44	74.00	-15.56	28.00	30.44	Peak
2	2402.000	108.71	-----	-----	78.25	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2385.8	58.44	-30.755	27.685	-26.315	54.000
2402	108.71	-30.755	77.955	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2480MHz
 Test BY :Ashton

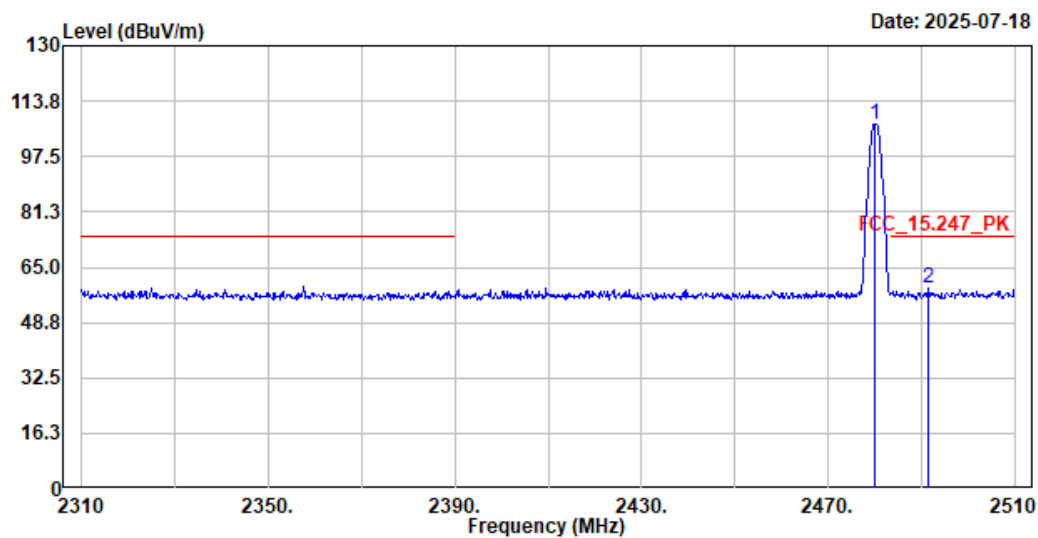

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	106.84	-----	-----	76.45	30.39	Peak
2	2491.600	58.63	74.00	-15.37	28.13	30.50	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	106.84	-30.755	76.085	--	--
2491.6	58.63	-30.755	27.875	-26.125	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT3M_2480MHz
 Test BY :Ashton

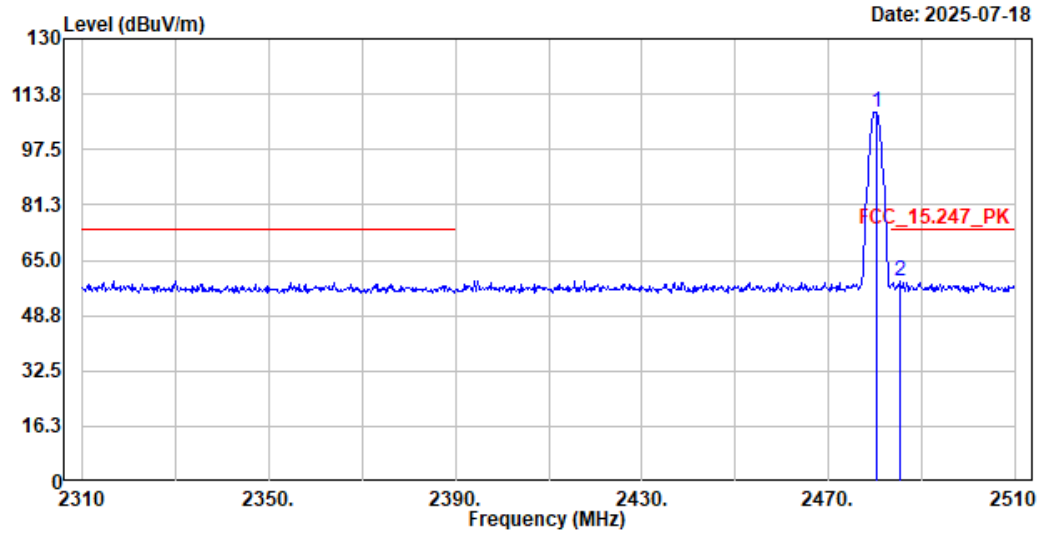

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	108.28	-----	-----	77.89	30.39	Peak
2	2485.400	58.63	74.00	-15.37	28.18	30.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480.2	108.28	-30.755	77.525	--	--
2485.4	58.63	-30.755	27.875	-26.125	54.000