


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_bt3M_2441MHz
test by :Kevin

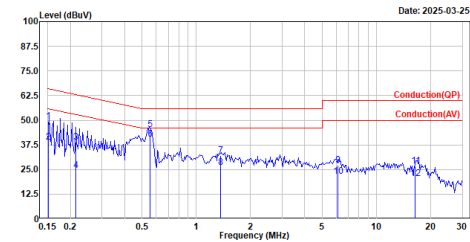

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.151	49.36	65.95	-16.59	39.72	9.64	QP
2	0.151	38.96	55.95	-16.99	29.32	9.64	Average
3	0.214	38.70	63.03	-24.33	29.06	9.64	QP
4	0.214	24.54	53.03	-28.49	14.90	9.64	Average
5	0.552	45.25	56.00	-10.75	35.00	9.65	QP
6	0.552	40.46	46.00	-5.54	30.81	9.65	Average
7	1.359	32.12	56.00	-23.88	22.40	9.72	QP
8	1.359	26.03	46.00	-19.97	16.31	9.72	Average
9	6.097	27.21	60.00	-32.79	17.07	10.14	QP
10	6.097	21.49	50.00	-28.51	11.35	10.14	Average
11	16.428	26.92	60.00	-33.08	17.14	9.78	QP
12	16.428	20.35	50.00	-29.65	10.57	9.78	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_bt3M_2441MHz
test by :Kevin

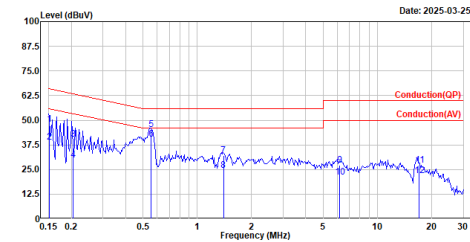


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.151	47.92	65.96	-18.04	38.30	9.62	QP
2	0.151	39.02	55.96	-16.94	29.40	9.62	Average
3	0.204	40.39	63.44	-23.05	30.77	9.62	QP
4	0.204	29.76	53.44	-23.68	20.14	9.62	Average
5	0.556	45.14	56.00	-10.86	35.51	9.63	QP
6	0.556	40.55	46.00	-5.45	30.92	9.63	Average
7	1.398	32.05	56.00	-23.95	22.35	9.70	QP
8	1.398	24.53	46.00	-21.47	14.83	9.70	Average
9	6.174	27.05	60.00	-32.95	16.93	10.12	QP
10	6.174	21.07	50.00	-28.93	10.95	10.12	Average
11	17.086	27.21	60.00	-32.79	17.35	9.86	QP
12	17.086	21.84	50.00	-28.16	11.98	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 20dB Bandwidth


Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK	2402	0.94	-
	2441	0.94	-
	2480	0.93	-
8DPSK	2402	1.29	-
	2441	1.29	-
	2480	1.29	-

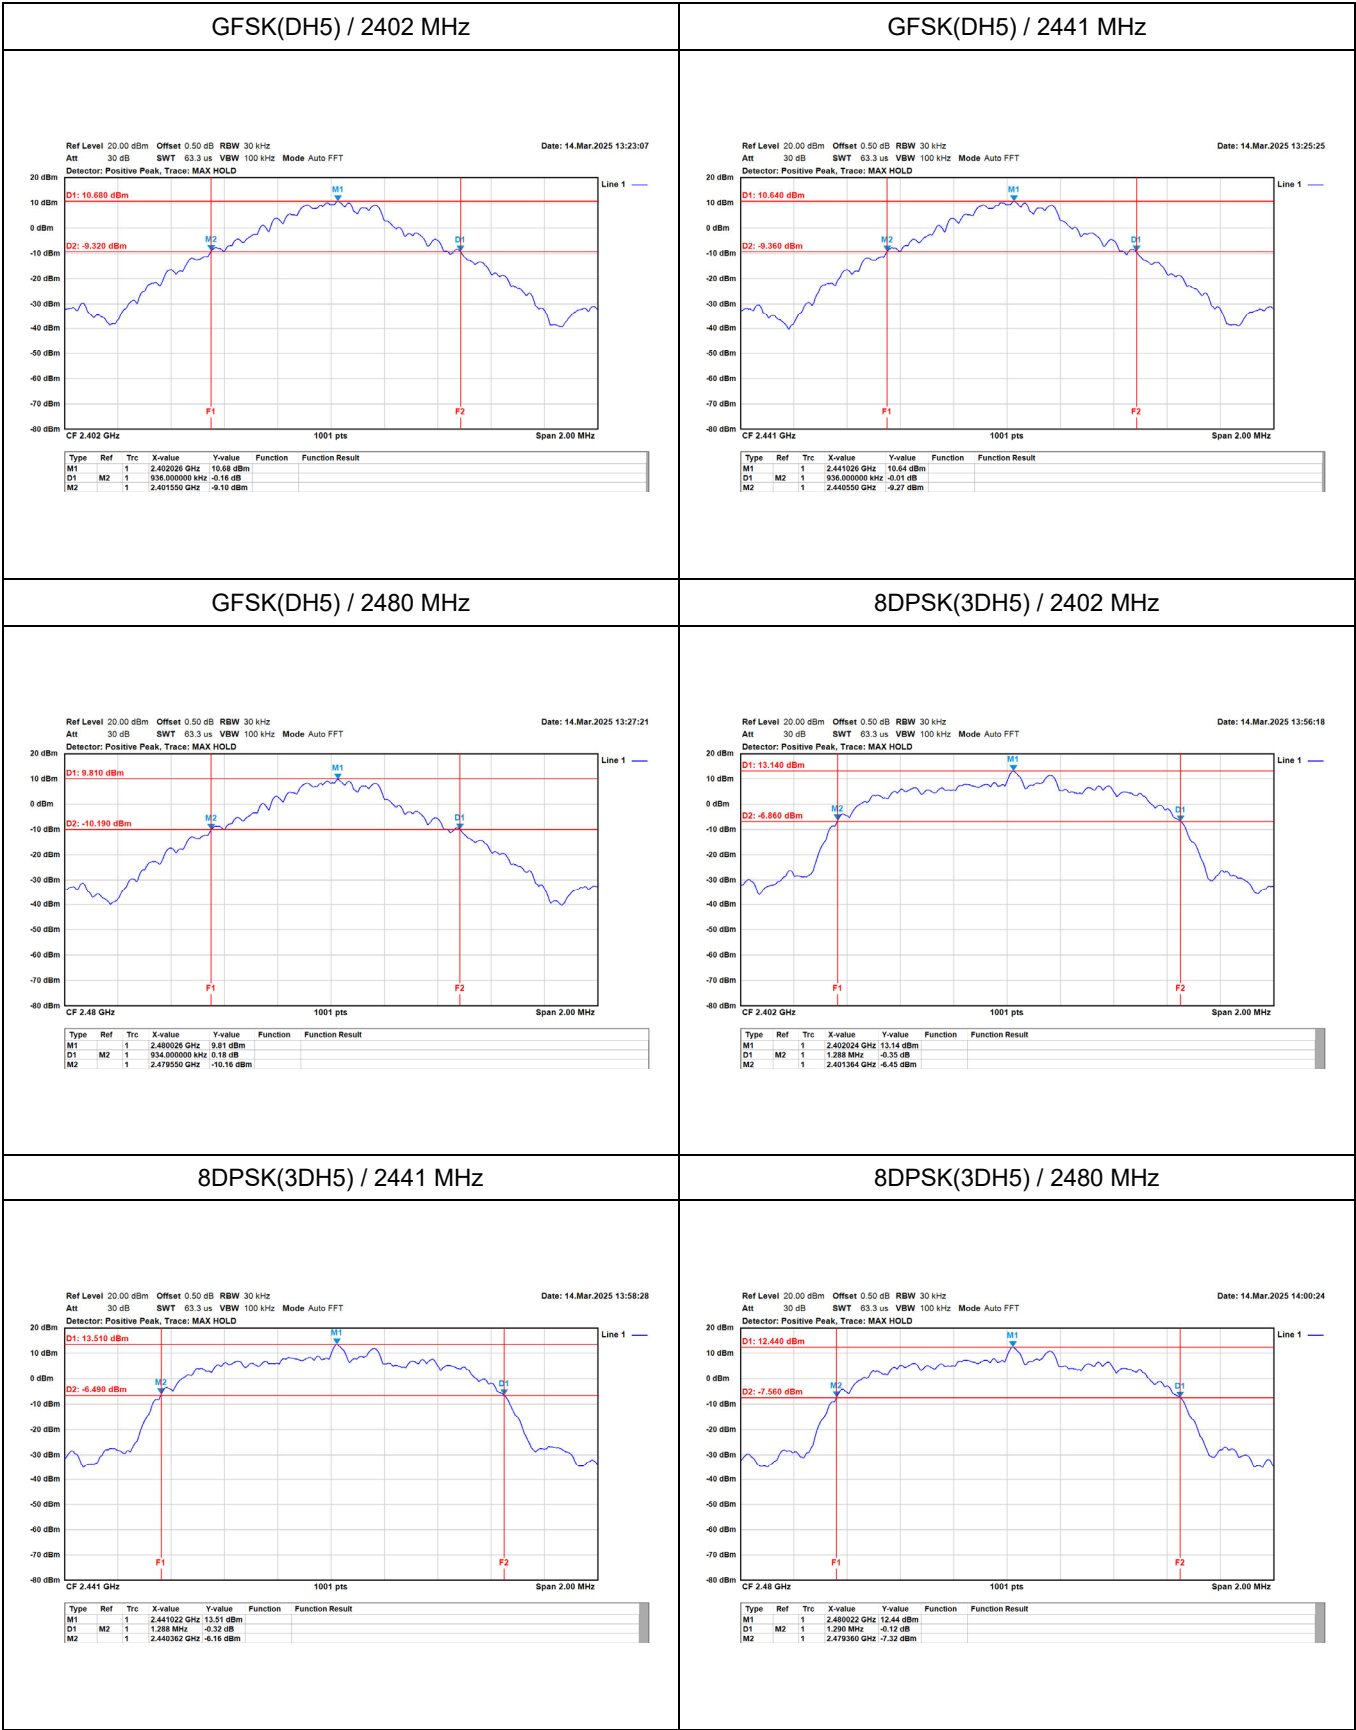


Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.624	Pass
	2441	0.99	0.624	Pass
	2480	0.99	0.623	Pass
8DPSK	2402	1.00	0.859	Pass
	2441	0.99	0.859	Pass
	2480	1.00	0.860	Pass


GFSK(DH5) / 2402 MHz

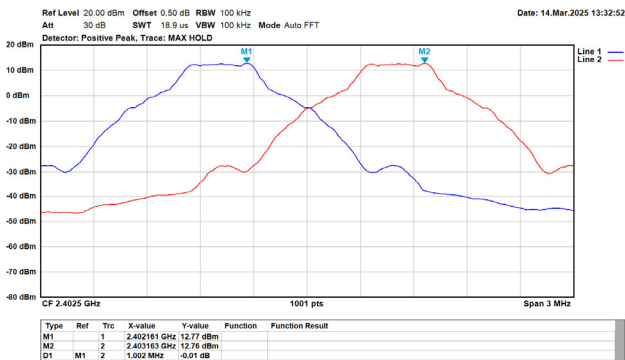


GFSK(DH5) / 2441 MHz

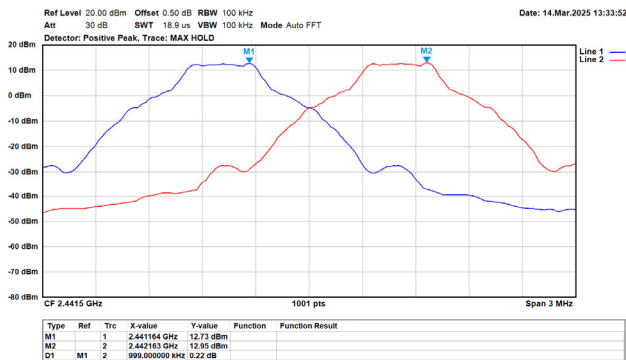


GFSK(DH5) / 2480 MHz

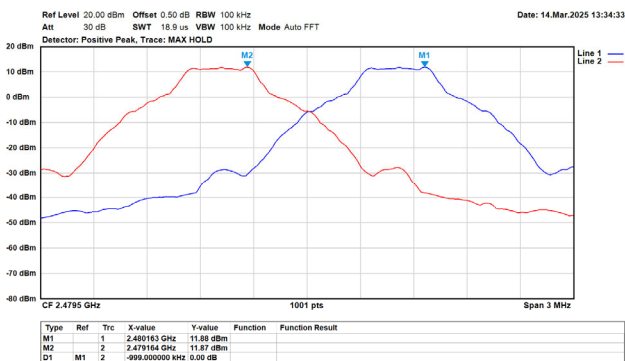


8DPSK(3DH5) / 2402 MHz

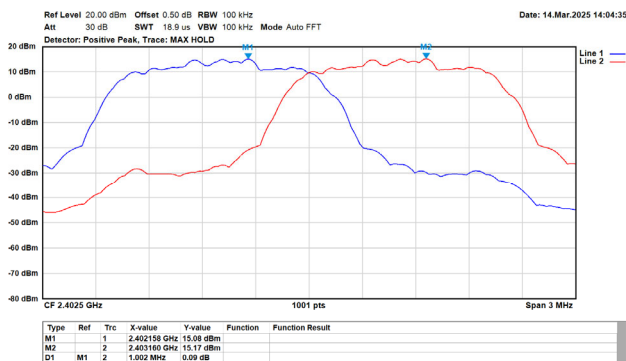

8DPSK(3DH5) / 2441 MHz

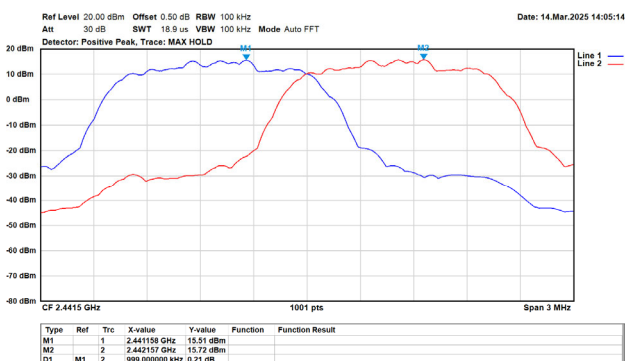

8DPSK(3DH5) / 2480 MHz

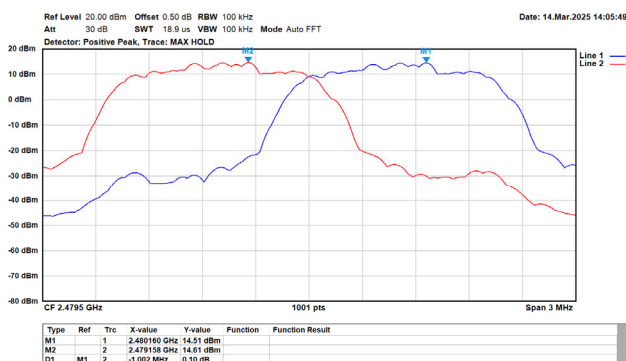


Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	15.02	21.00	Pass
	2441	14.77	21.00	Pass
	2480	13.69	21.00	Pass
8DPSK	2402	18.64	21.00	Pass
	2441	18.74	21.00	Pass
	2480	18.58	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

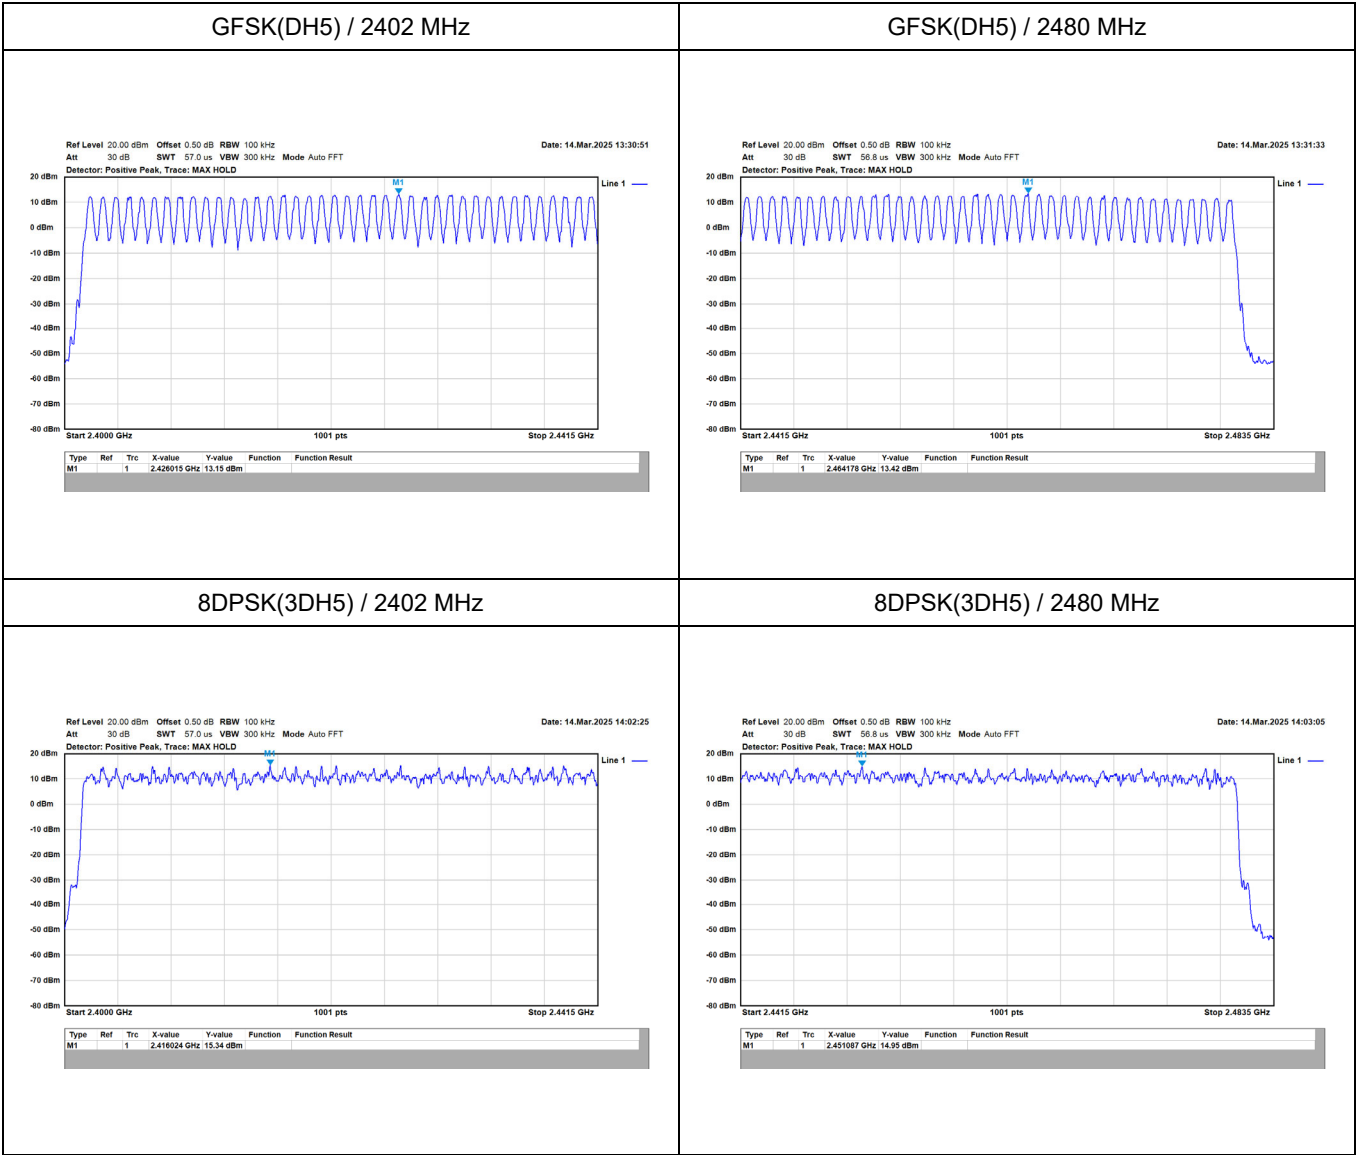


Appendix F. Test Result of Dwell Time


Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec
Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4 sec, And Corresponds to The Standard.	

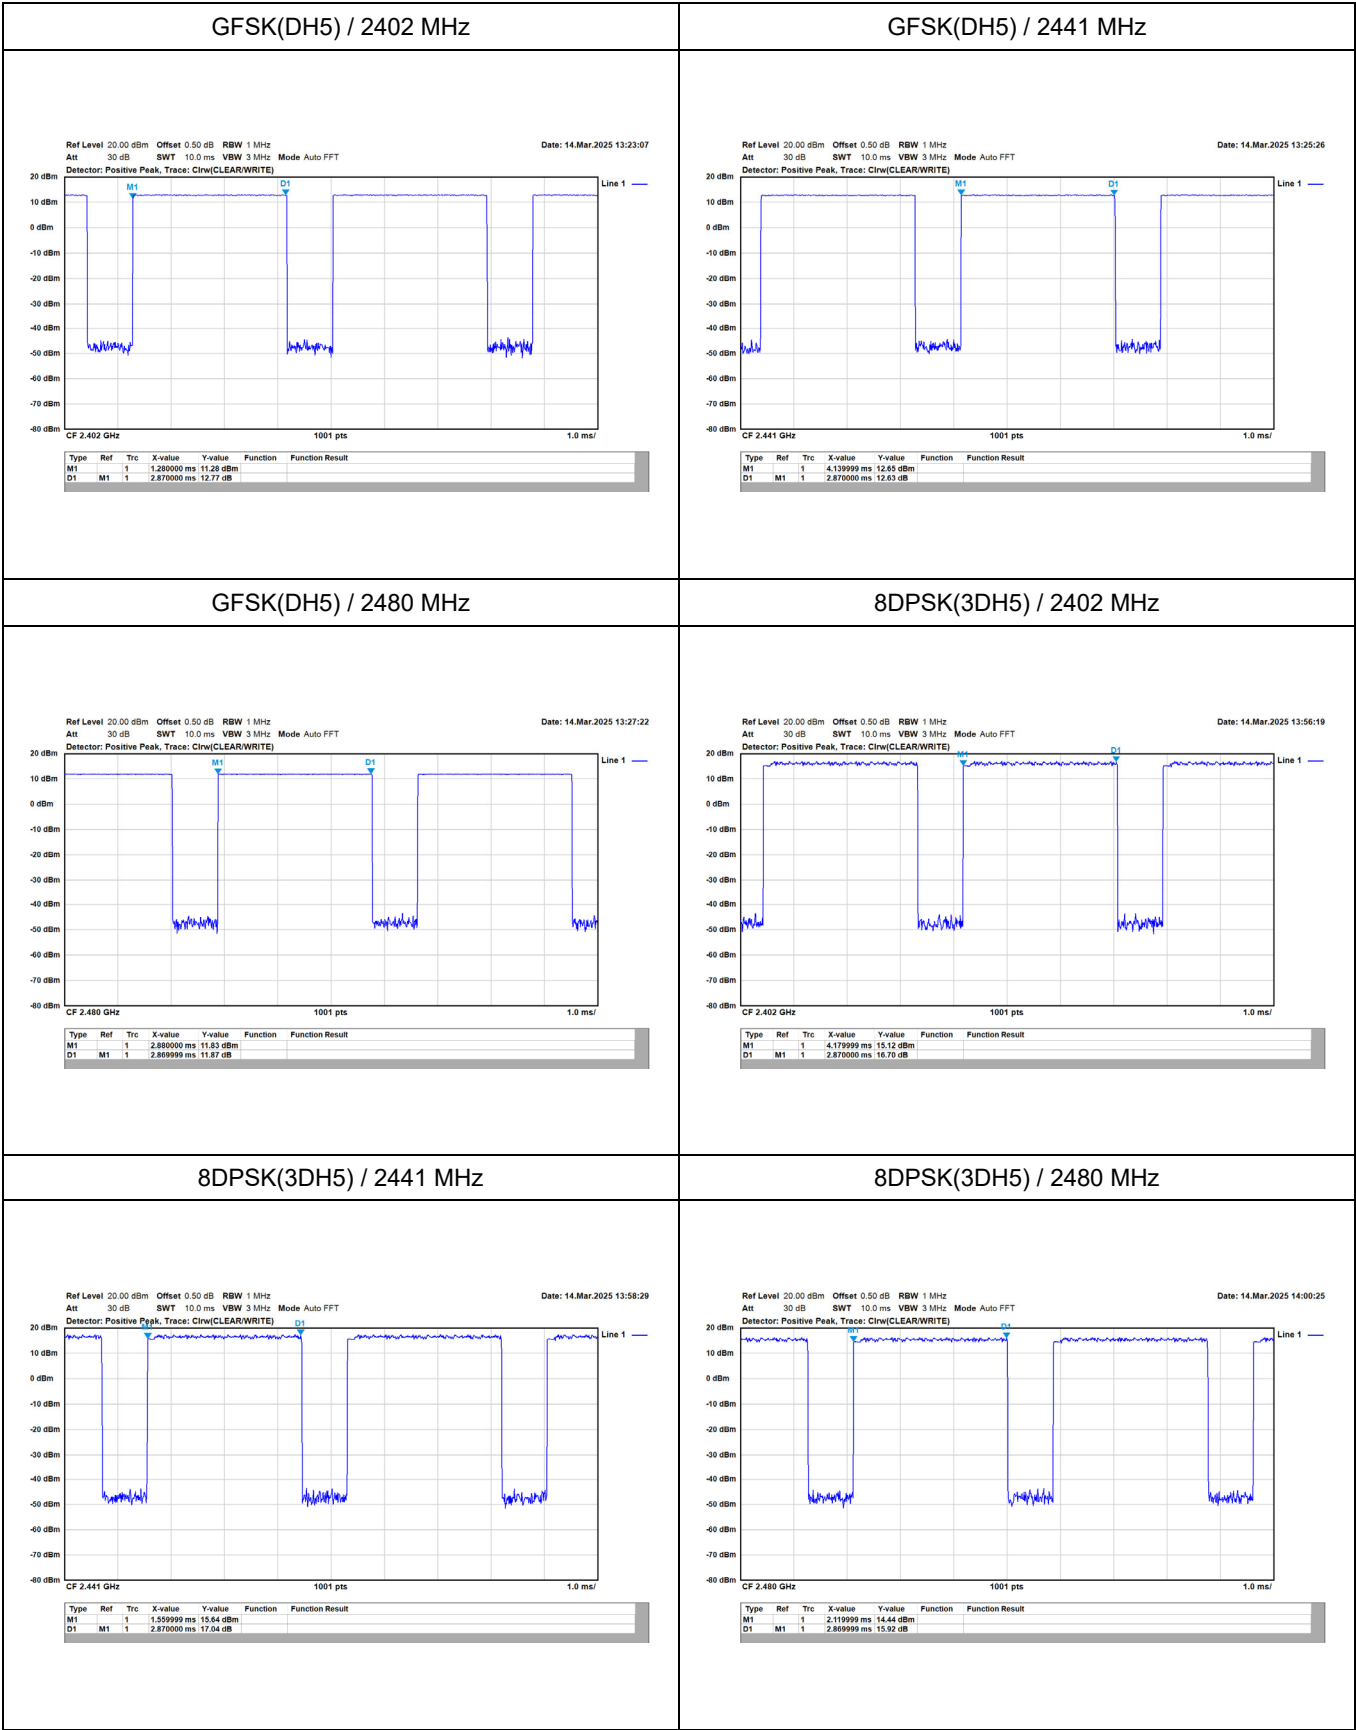


Appendix G. Test Result of Antenna Port Conducted Emission

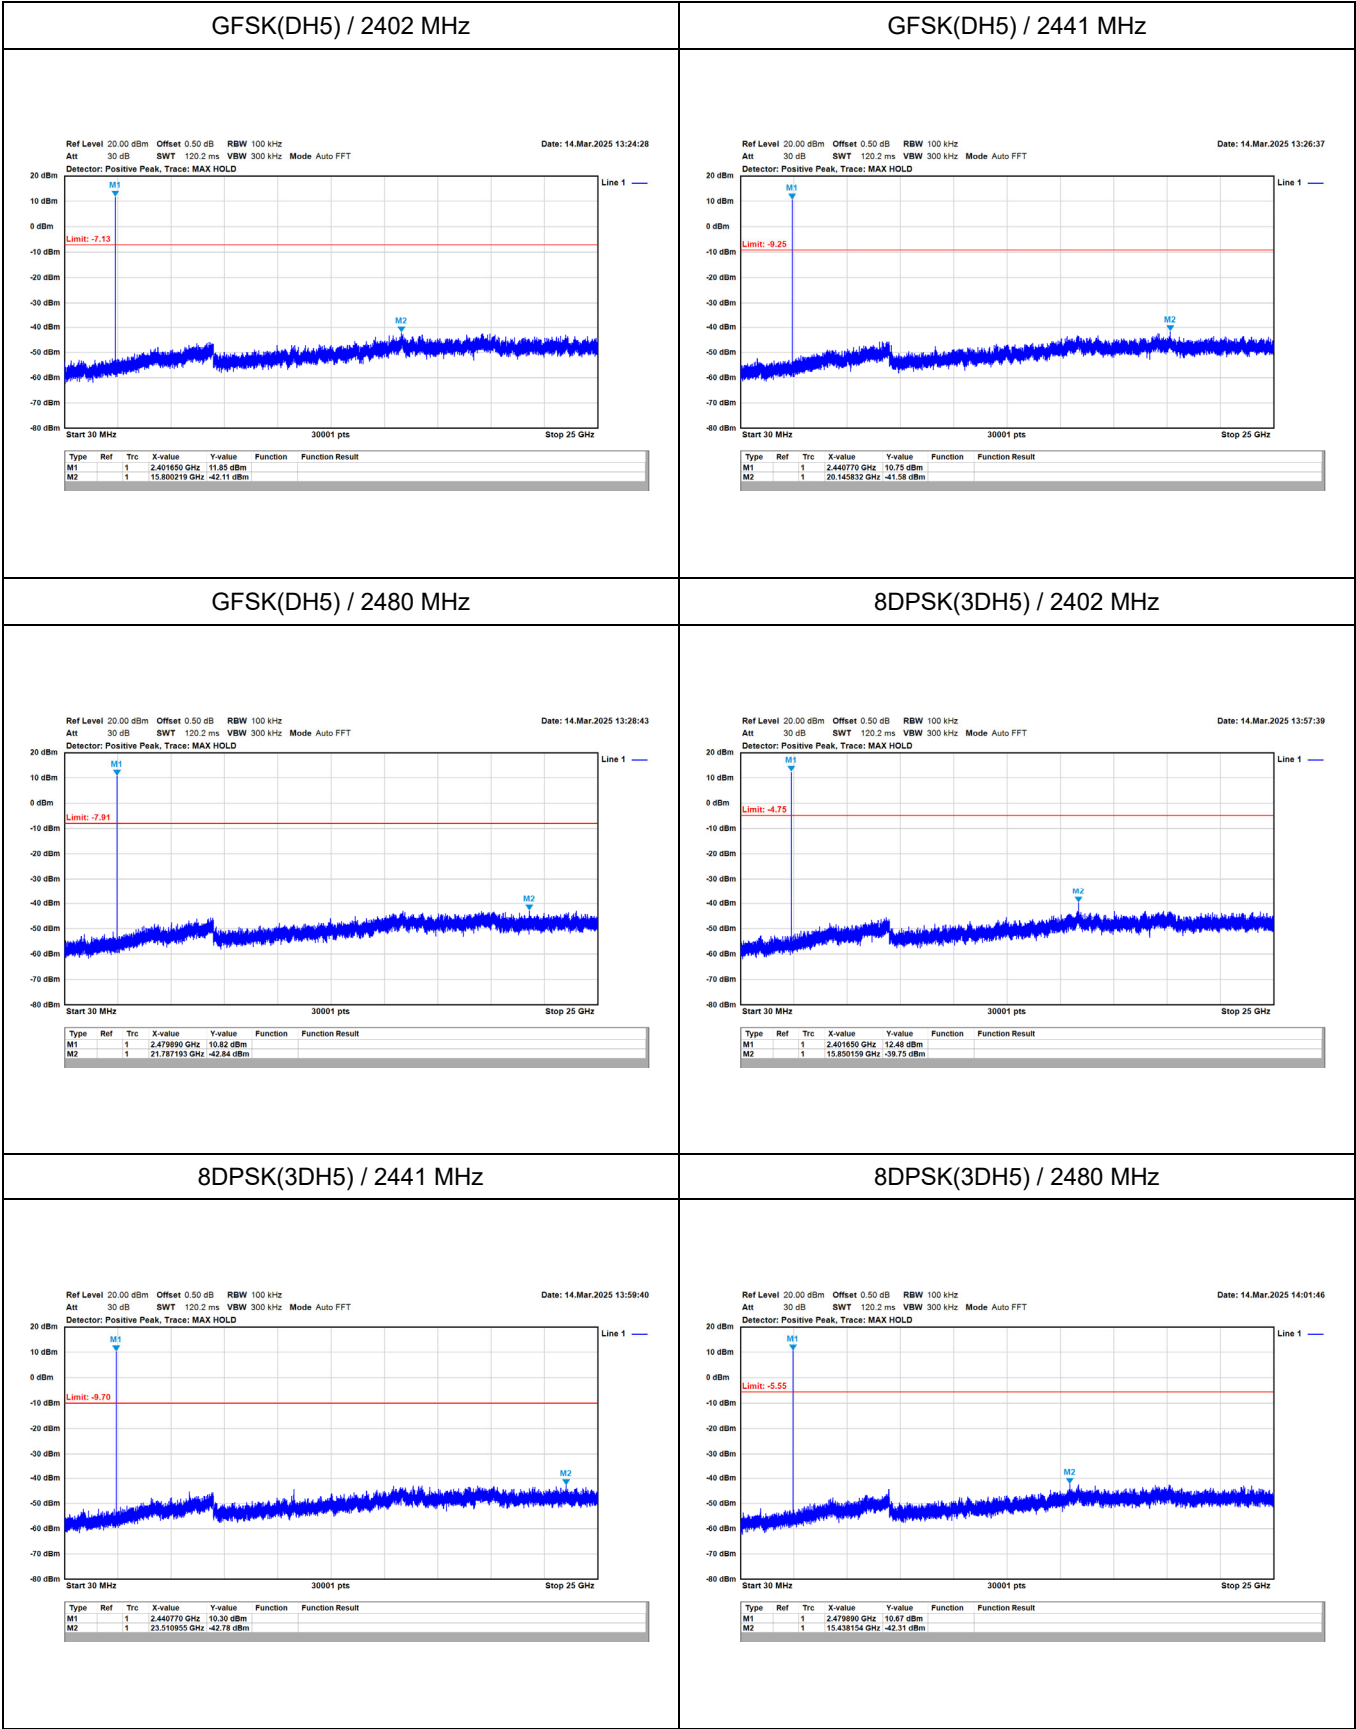


GFSK(DH5) (Band Edge) / 2402 MHz

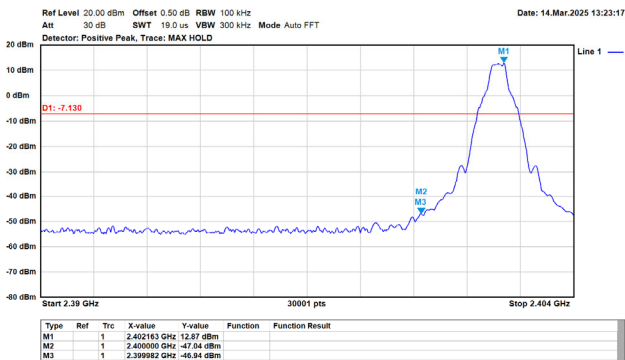


GFSK(DH5) (Band Edge) / 2480 MHz

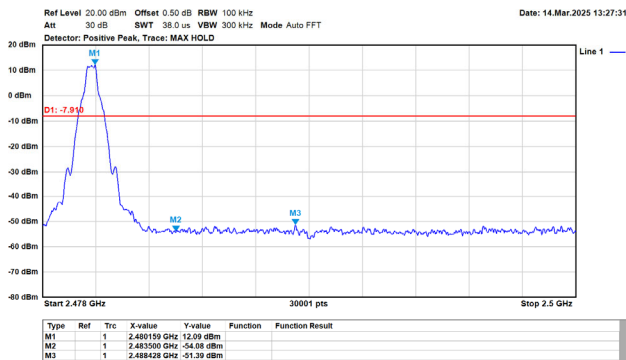


8DPSK(3DH5) (Band Edge) / 2402 MHz

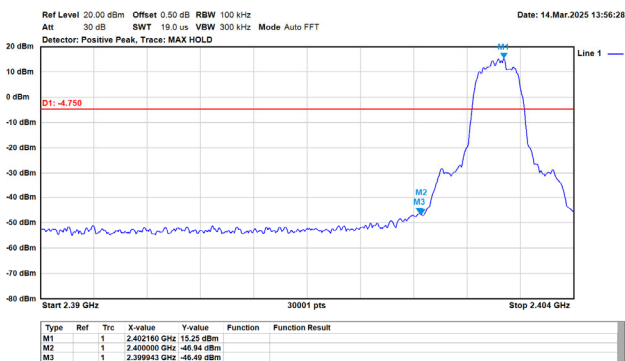


8DPSK(3DH5) (Band Edge) / 2480 MHz

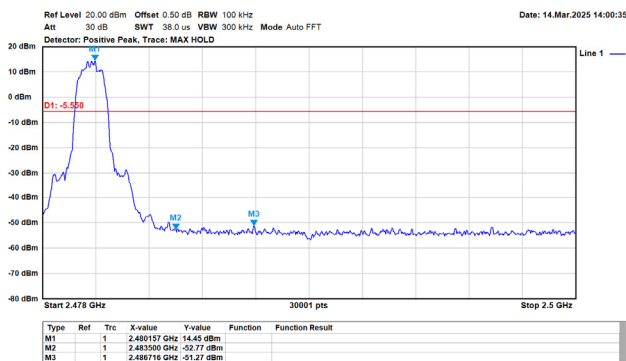


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

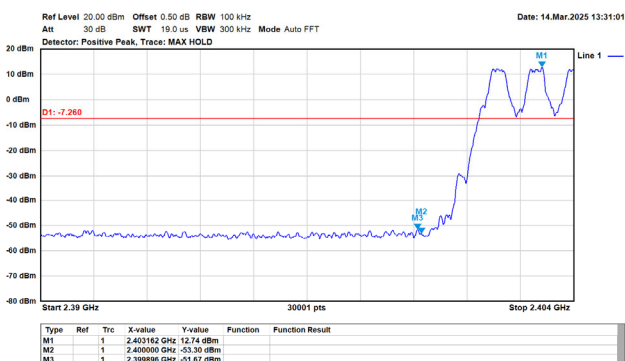


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

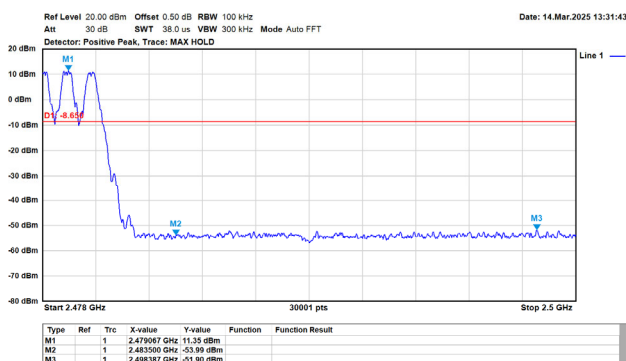

8DPSK(3DH5) (Band Edge Hopping) / 2402 MHz

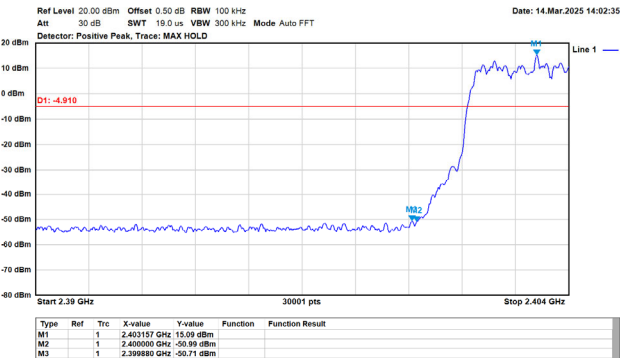


8DPSK(3DH5) (Band Edge Hopping) / 2480 MHz

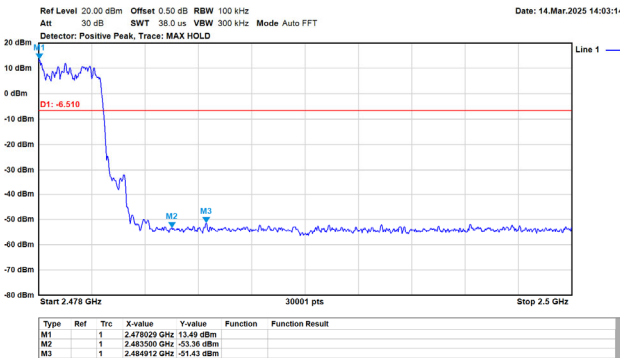

Appendix H. Test Result of Radiated Emission


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt1M_2402MHz
Test BY :Bob

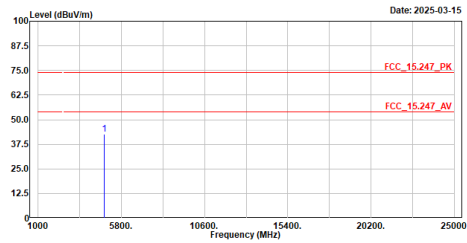

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	42.49	74.00	-31.51	57.44	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt1M_2402MHz
Test BY :Bob

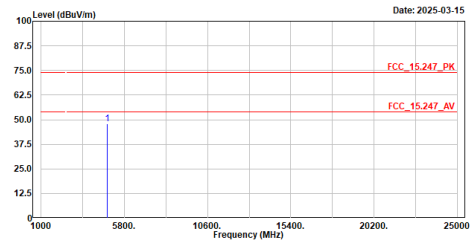

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	48.09	74.00	-25.91	63.04	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt1M_2441MHz
Test BY :Bob

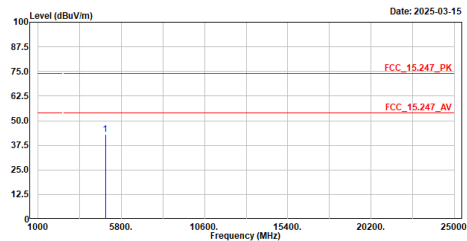

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	43.00	74.00	-31.00	57.57	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt1M_2441MHz
Test BY :Bob

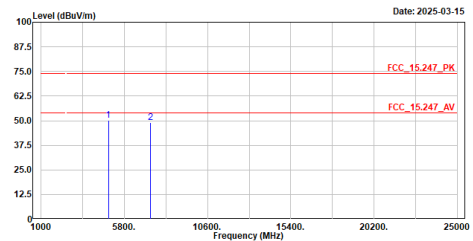

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	50.17	74.00	-23.83	64.74	-14.57	Peak
2	7323.000	48.93	74.00	-25.07	55.85	-6.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt1M_2480MHz
Test BY :Bob

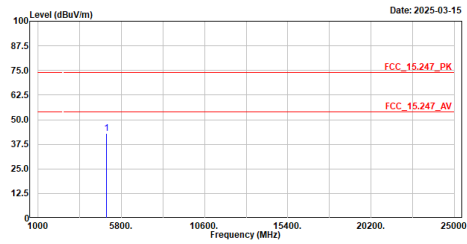

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	43.01	74.00	-30.99	57.23	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt1M_2480MHz
Test BY :Bob

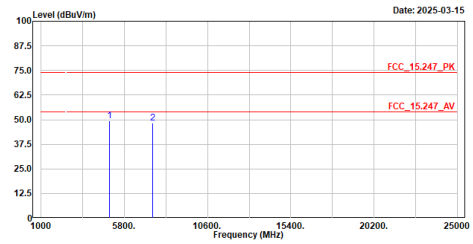

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	49.48	74.00	-24.52	63.70	-14.22	Peak
2	7440.000	48.21	74.00	-25.79	55.22	-7.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt3M_2402MHz
Test BY :Bob

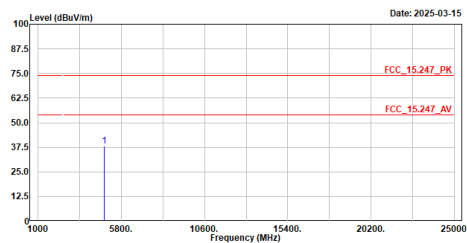

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	38.02	74.00	-35.98	52.97	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt3M_2402MHz
Test BY :Bob

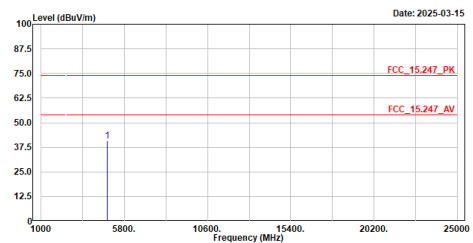

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	40.76	74.00	-33.24	55.71	-14.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt3M_2441MHz
Test BY :Bob

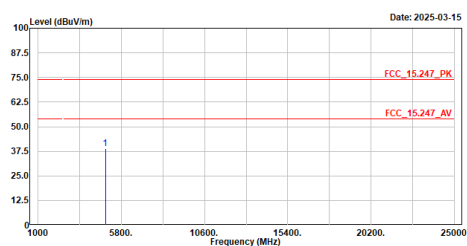

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	38.86	74.00	-35.14	53.43	-14.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt3M_2441MHz
Test BY :Bob

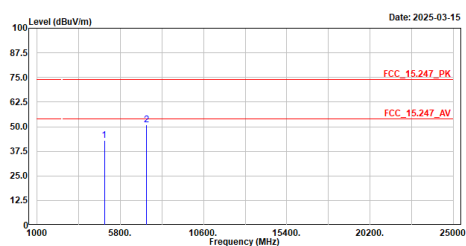

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	43.04	74.00	-30.96	57.61	-14.57	Peak
2	7323.000	51.08	74.00	-22.92	58.00	-6.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt3M_2480MHz
Test BY :Bob

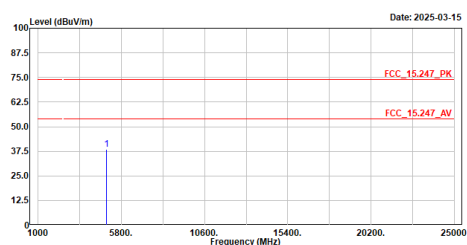

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	38.60	74.00	-35.40	52.82	-14.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt3M_2480MHz
Test BY :Bob

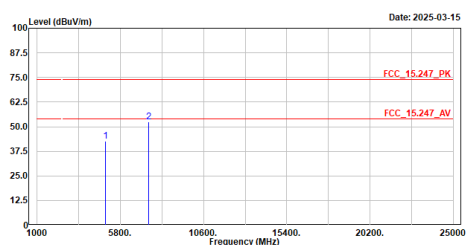

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	42.57	74.00	-31.43	56.79	-14.22	Peak
2	7440.000	52.37	74.00	-21.63	59.38	-7.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_bt3M_2441MHz
Test BY :Bob

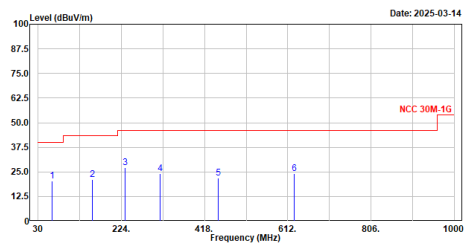


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	62.980	20.49	40.00	-19.51	45.66	-25.17	QP
2	156.100	21.06	43.50	-22.44	44.95	-23.89	QP
3	233.700	27.28	46.00	-18.72	52.76	-25.48	QP
4	314.210	24.00	46.00	-21.92	46.67	-22.59	QP
5	450.610	21.70	46.00	-24.30	40.53	-18.83	QP
6	626.550	24.26	46.00	-21.74	39.48	-15.22	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_bt3M_2441MHz
Test BY :Bob

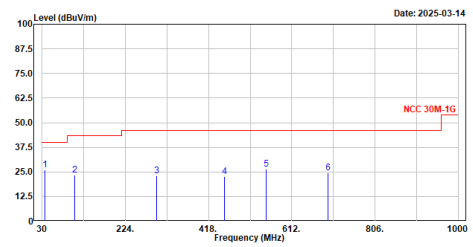


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	36.790	25.93	40.00	-14.07	50.60	-24.67	QP
2	106.630	23.47	43.50	-20.03	50.86	-27.39	QP
3	296.750	23.00	46.00	-23.00	46.20	-23.20	QP
4	455.830	22.57	46.00	-23.43	41.27	-18.70	QP
5	551.860	26.44	46.00	-19.56	43.58	-17.14	QP
6	696.390	24.51	46.00	-21.49	38.57	-14.06	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2402MHz
 Test BY :Bob

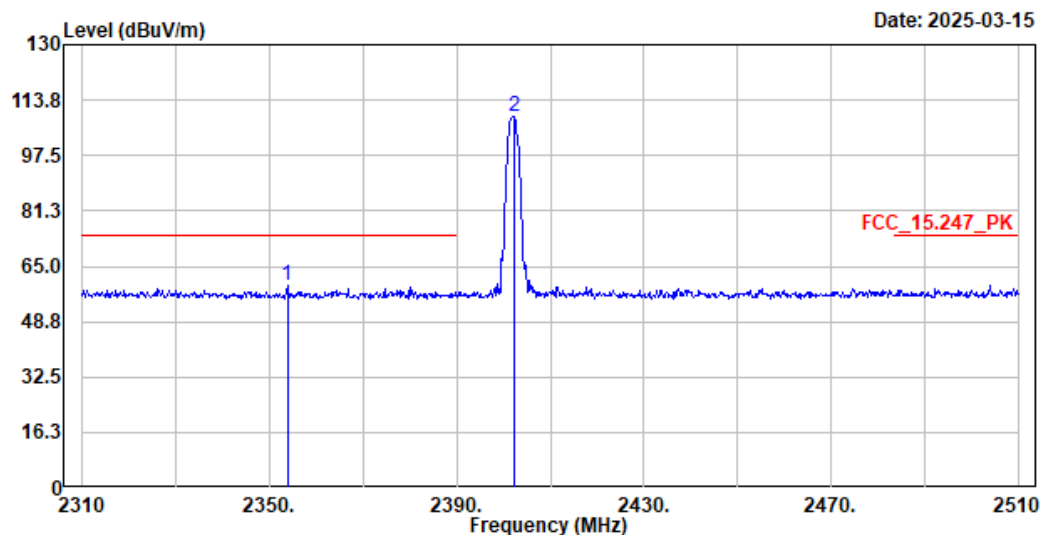

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2353.800	59.35	74.00	-14.65	28.93	30.42	Peak
2	2402.200	108.84	-----	-----	78.38	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2353.8	59.35	-24.734	34.616	-19.384	54.000
2402.2	108.84	-24.734	84.106	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1M_2402MHz
 Test BY :Bob

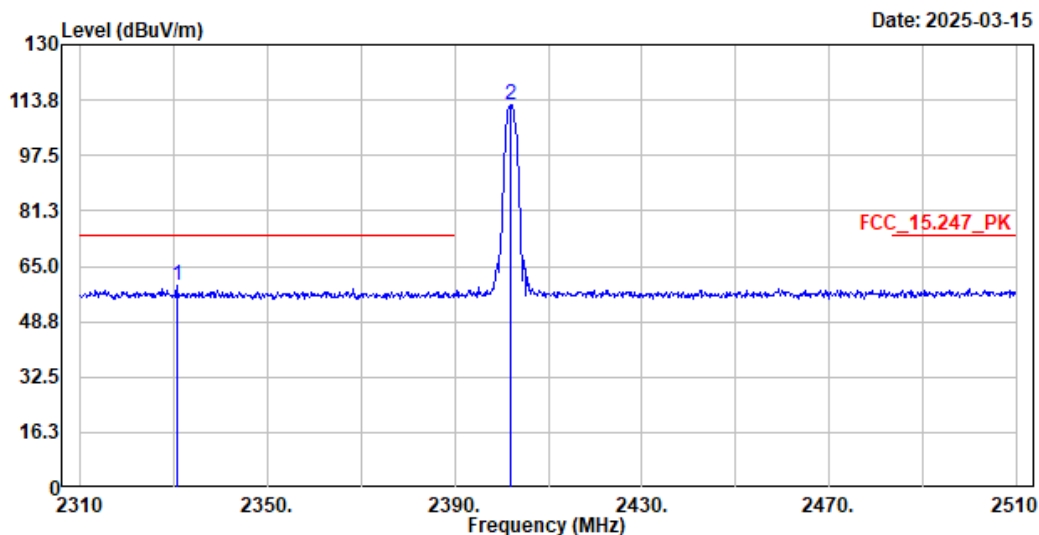

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2330.600	59.19	74.00	-14.81	28.69	30.50	Peak
2	2402.000	112.11	-----	-----	81.65	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2330.6	59.19	-24.734	34.456	-19.544	54.000
2402	112.11	-24.734	87.376	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt1M_2480MHz
 Test BY :Bob

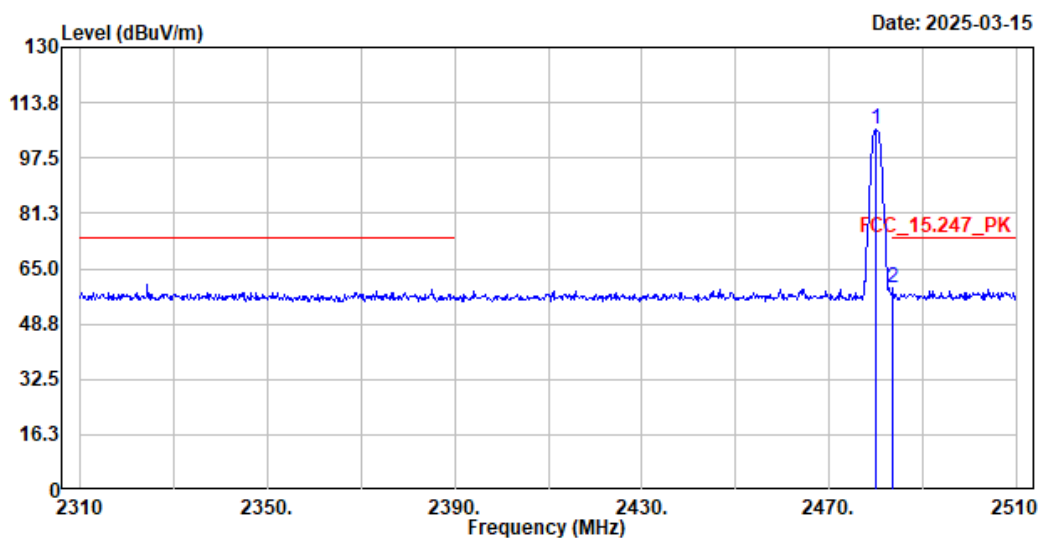

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.000	105.73	-----	-----	75.34	30.39	Peak
2	2483.600	59.24	74.00	-14.76	28.80	30.44	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	105.73	-24.734	80.996	--	--
2483.6	59.24	-24.734	34.506	-19.494	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt1M_2480MHz
 Test BY :Bob

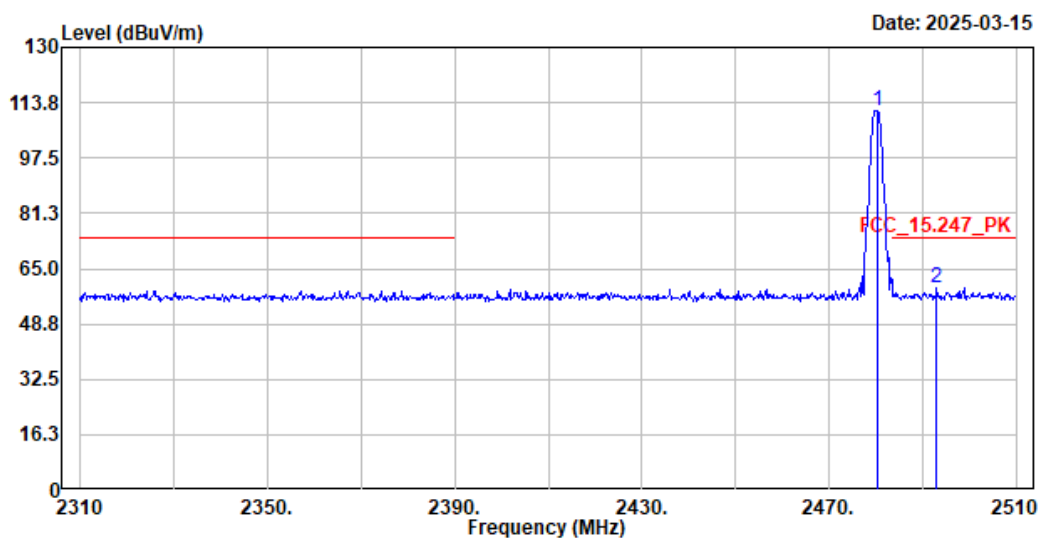

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	111.42	-----	-----	81.03	30.39	Peak
2	2493.000	59.59	74.00	-14.41	29.09	30.50	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	111.42	-24.734	86.686	--	--
2493	59.59	-24.734	34.856	-19.144	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2402MHz
 Test BY :Bob

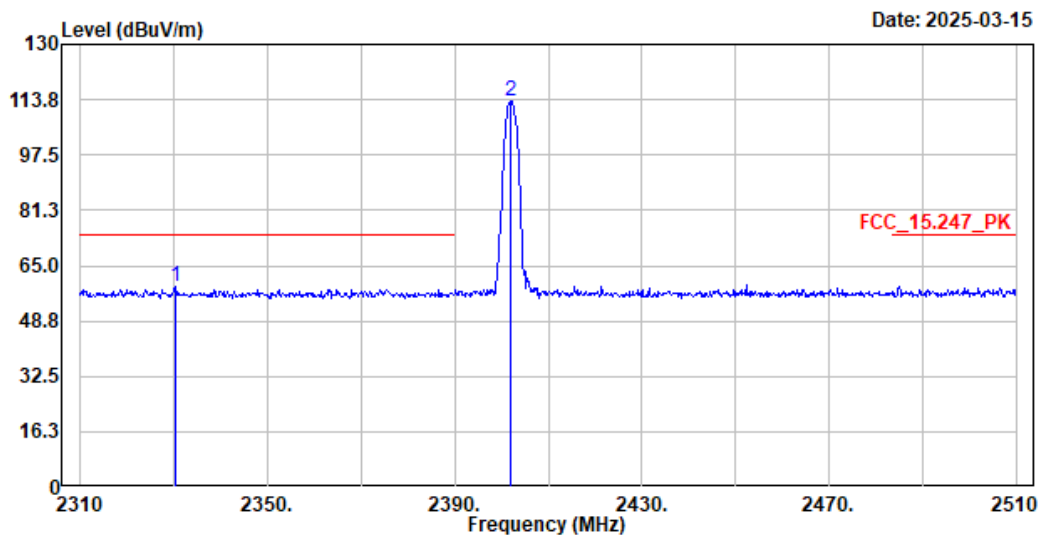

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2330.200	58.74	74.00	-15.26	28.23	30.51	Peak
2	2402.000	113.33	-----	-----	82.87	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2330.2	58.74	-24.734	34.006	-19.994	54.000
2402	113.33	-24.734	88.596	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3M_2402MHz
 Test BY :Bob

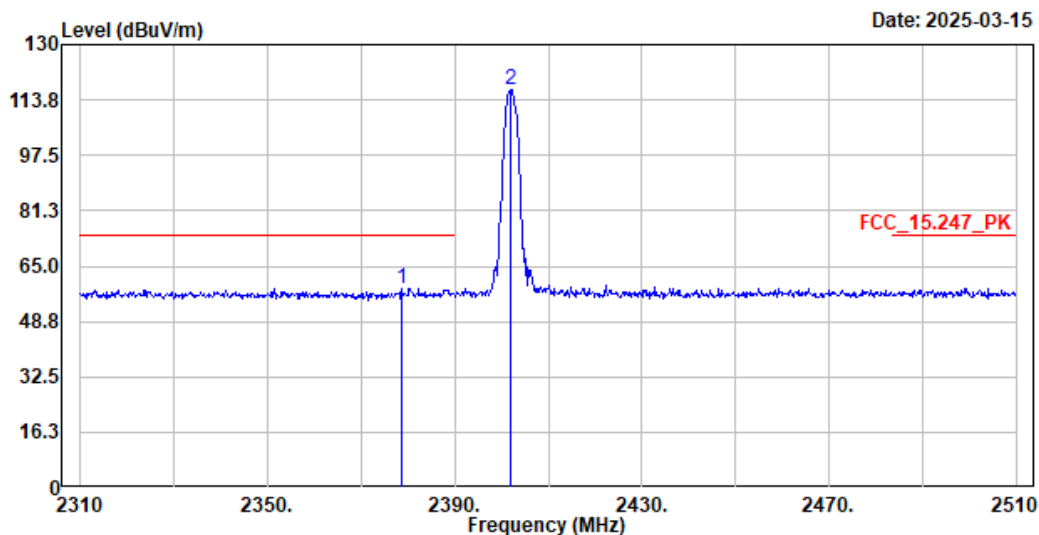

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2378.800	58.37	74.00	-15.63	27.94	30.43	Peak
2	2402.000	116.66	-----	-----	86.20	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2378.8	58.37	-24.734	33.636	-20.364	54.000
2402	116.66	-24.734	91.926	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_bt3M_2480MHz
 Test BY :Bob

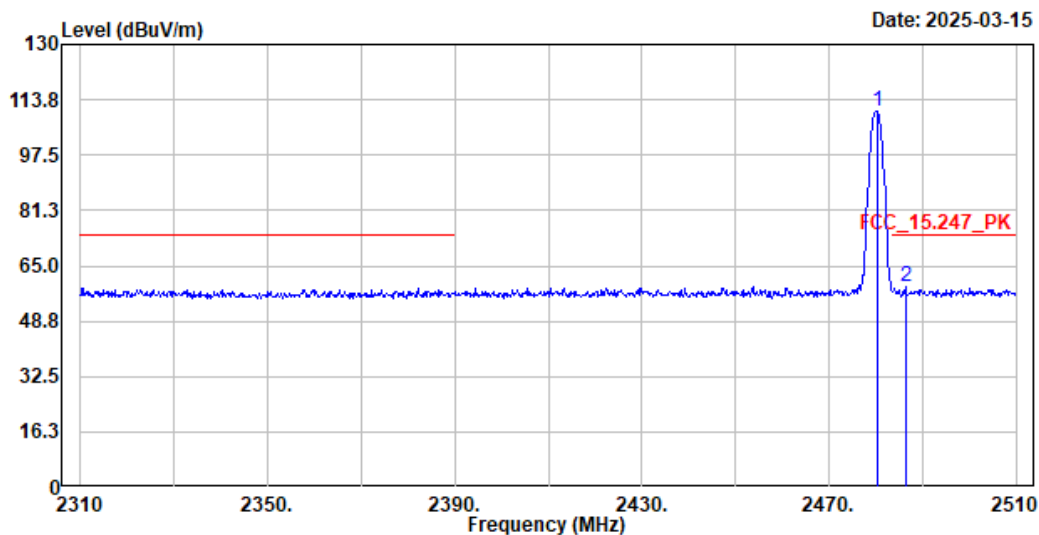

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.200	110.33	-----	-----	79.94	30.39	Peak
2	2486.400	58.66	74.00	-15.34	28.20	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	110.33	-24.734	85.596	--	--
2486.4	58.66	-24.734	33.926	-20.074	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_bt3M_2480MHz
 Test BY :Bob

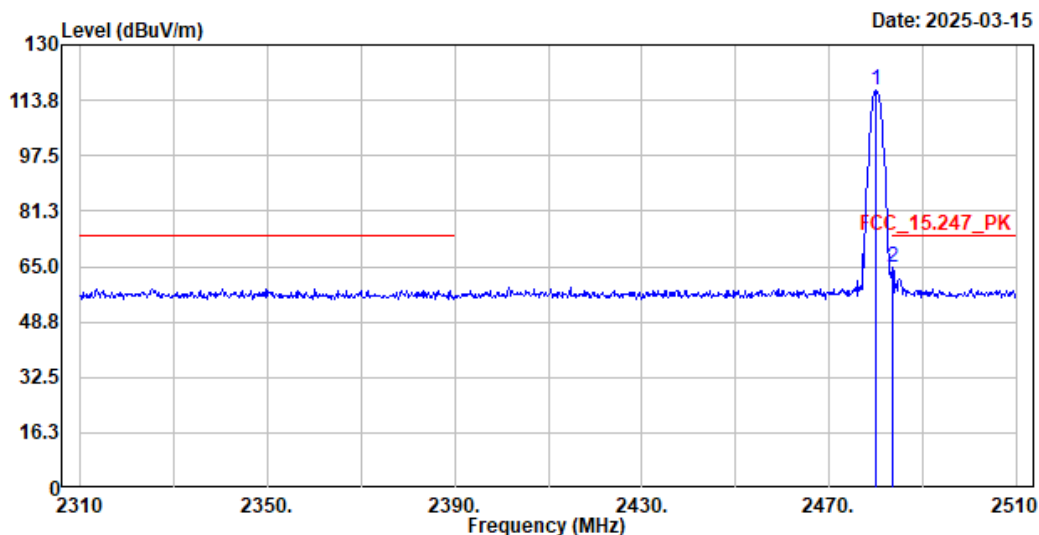

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	116.53	-----	-----	86.14	30.39	Peak
2	2483.600	64.94	74.00	-9.06	34.50	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:


Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	116.53	-24.734	91.796	--	--
2483.6	64.94	-24.734	40.206	-13.794	54.000

Appendix I. Test Setup Photograph


Front View of AC Power Line Conducted Emission Test



Back View of AC Power Line Conducted Emission Test

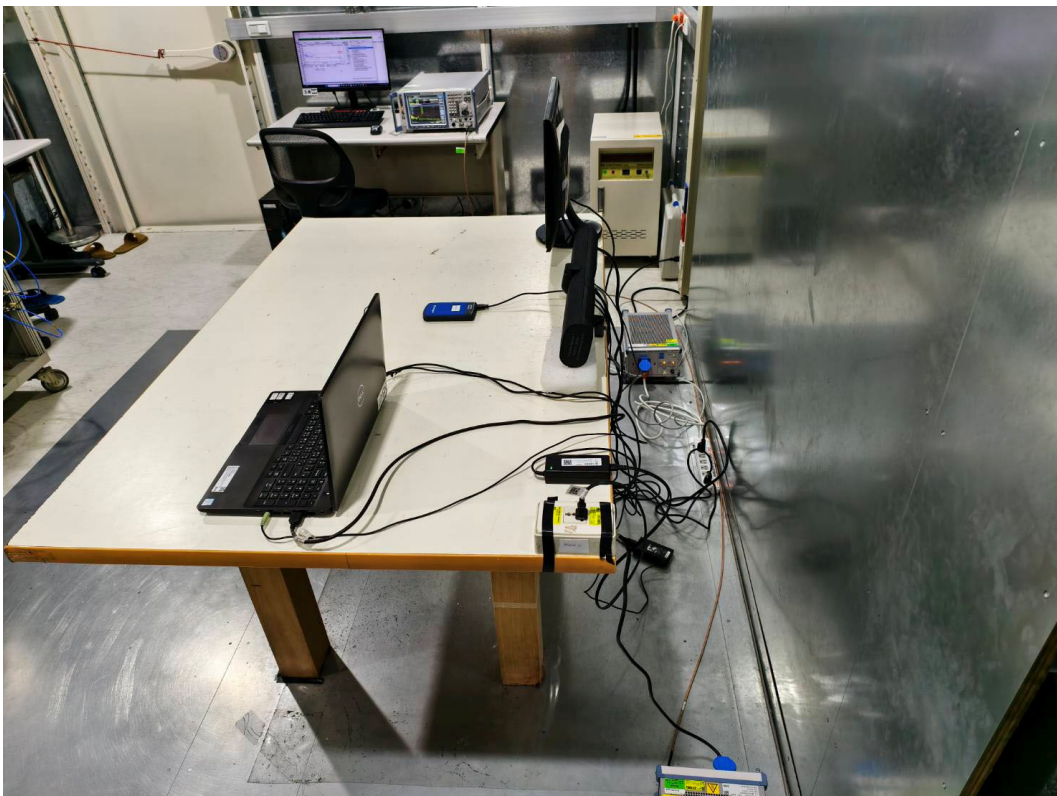

Radiated Test (Below 1 GHz)

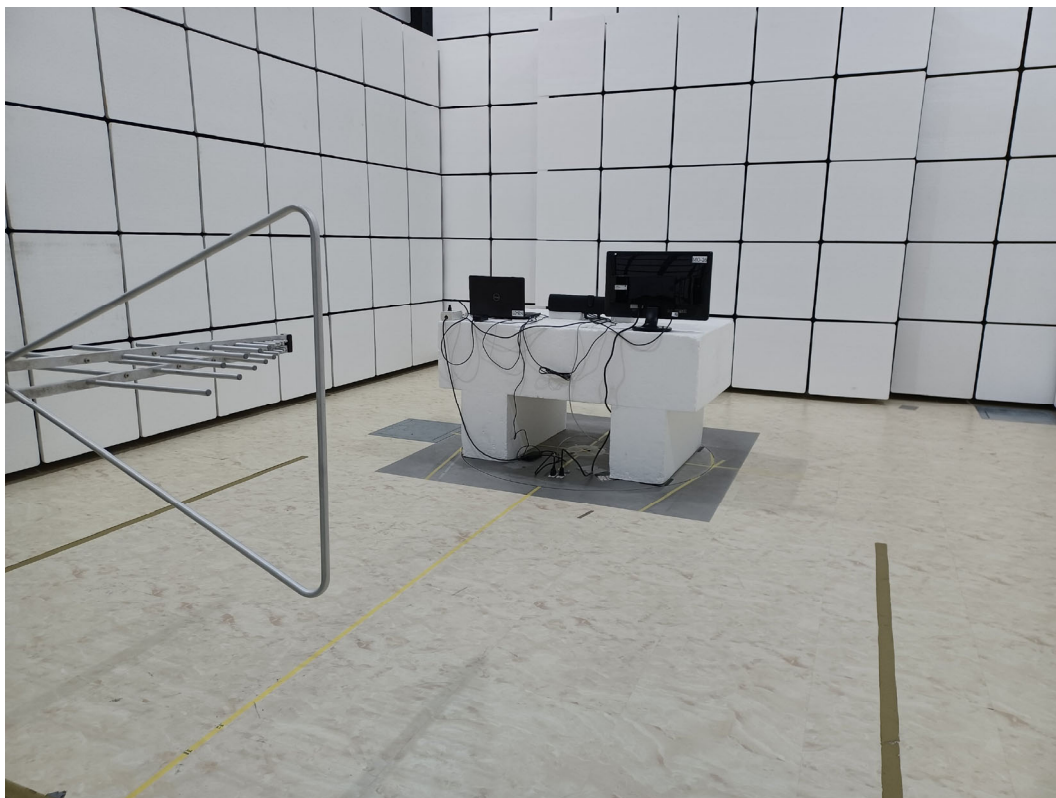

Radiated Test (Above 1 GHz)

