



HAC T-COIL SIGNAL TEST REPORT

**FCC 47 CFR § 20.19
ANSI C63.19-2011**

For
Smartphone

**FCC ID: BCG-E3307A
Model Name: A2215**

**Report Number: 12607353-S3V2
Issue Date: 8/12/2019**

Prepared for
**APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	8/9/2019	Initial Issue	--
V2	8/12/2019	Updated based on reviewer comments	Nathan Sousa

Table of Contents

1. Attestation of Test Results	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	6
4.1. <i>Measuring Instrument Calibration</i>	6
4.2. <i>Measurement Uncertainty</i>	7
5. Test Procedures for all Technologies	8
5.1. <i>General Procedures C63.19-2011, Section 7</i>	8
5.2. <i>VoWiFi – For PAG REUSE</i>	9
5.3. <i>Over the Top (OTT) – For PAG REUSE</i>	10
6. Audio Level and Gain Measurements	12
6.1. <i>GSM/W-CDMA and VoLTE</i>	12
6.2. <i>CDMA (1xRTT)</i>	12
6.3. <i>VoWi-Fi – For PAG REUSE</i>	12
6.4. <i>Over the Top (OTT) – For PAG REUSE</i>	13
7. T-coil Measurement Criteria	14
7.1. <i>Frequency Response</i>	14
7.2. <i>Signal to Noise</i>	15
8. Device Under Test	16
8.1. <i>Air Interfaces and Operating Mode</i>	17
9. Investigations (Antenna, Codec, & Air Interface)	18
9.1. <i>Antenna Investigation</i>	18
9.1.1. <i>Standard Phone Application</i>	18
9.1.2. <i>OTT Application</i>	20
9.2. <i>Standard Phone Application Codec Bit-rate Investigation</i>	22
9.3. <i>Standard Phone Application Air Interface Investigation</i>	23
9.4. <i>Standard Phone Application VoWi-Fi Codec Investigation</i>	26
9.5. <i>Standard Phone Application VoWi-Fi Air Interface Investigation</i>	27
9.6. <i>OTT Codec Investigation</i>	29
9.7. <i>OTT Air Interface Investigation</i>	30
10. HAC (T-coil) Test Results	31
10.1. <i>Standard Phone Application</i>	31
10.2. <i>OTT Application</i>	33
10.3. <i>Worst Case T-Coil Test Plot</i>	34
Appendix	35
<i>Appendix A: T-Coil Setup Photo</i>	35

<i>Appendix B: T-Coil Test Plots</i>	35
<i>Appendix C: T-Coil Test Plots (OTT)</i>	35
<i>Appendix D: T-Coil Probe Certificates</i>	35
<i>Appendix E: Adjusted Gain Procedure</i>	35



1. Attestation of Test Results

Applicant Name	APPLE, INC.
FCC ID	BCG-E3307A
Model Name	A2215
Applicable Standards	FCC 47 CFR § 20.19 ANSI C63.19-2011
HAC Rating	T4
Date Tested	5/20/2019 to 8/1/2019
Test Results	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By: 	Prepared By: 
Devin Chang Senior Test Engineer UL Verification Services Inc.	Coltyce Sanders Senior Test Engineer UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05

KDB 285076 D02 T-Coil testing for CMRS IP v03

KDB 285076 D03 HAC FAQ v01

TCB workshop updates

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at:

47266 Benicia Street
SAR Lab 8

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ABM Probe	SPEAG	AM1DV3	3083	1/15/2020
Data Acquisition Electronics	SPEAG	DAE4	1540	2/18/2020
DAC	Sound Devices	USBPre 2	HB11173410003	N/A
Radio Communication Tester	R & S	CMW 500	125236	04/10/2020

4.2. Measurement Uncertainty

Measurement Uncertainty for Audio Band Magnetic Measurement

Error Description	Uncertainty values ($\pm\%$)	Probe Dist.	Div.	C_i		Std. Unc.	
				ABM1	ABM2	ABM1 ($\pm\%$)	ABM2 ($\pm\%$)
Probe Sensitivity							
Reference level	3.0	N	1	1	1	3.0	3.0
AMCC geometry	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
AMCC current	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioning during calibration	0.1	R	$\sqrt{3}$	1	1	0.1	0.1
Noise contribution	0.7	R	$\sqrt{3}$	0.0143	1	0.0	0.4
Frequency slope	5.9	R	$\sqrt{3}$	0.1	1.00	0.3	3.5
Probe System							
Repeatability / drift	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	$\sqrt{3}$	1	1	0.4	0.4
Acoustic noise	1.0	R	$\sqrt{3}$	0.1	1	0.1	0.6
Probe angle	2.3	R	$\sqrt{3}$	1	1	1.4	1.4
Spectral processing	0.9	R	$\sqrt{3}$	1	1	0.5	0.5
Integration time	0.6	N	1	1	5	0.6	3.0
Field disturbance	0.2	R	$\sqrt{3}$	1	1	0.1	0.1
Test Signal							
Reference signal spectral response	0.6	R	$\sqrt{3}$	0	1	0.0	0.4
Positioning							
Probe positioning	1.9	R	$\sqrt{3}$	1	1	1.1	1.1
Phantom positioning	0.9	R	$\sqrt{3}$	1	1	0.5	0.5
EUT positioning	1.9	R	$\sqrt{3}$	1	1	1.1	1.1
External Contributions							
RF interference	0.0	R	$\sqrt{3}$	1	0.3	0.0	0.0
Test signal variation	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Combined Std. Uncertainty (ABM field)						4.1	6.1
Expanded Std. Uncertainty (%)						8.1	12.3
Notes for table 1. N - Nomal 2. R - Rectangular 3. Div. - Divisor used to obtain standard uncertainty							

5. Test Procedures for all Technologies

5.1. General Procedures C63.19-2011, Section 7

ANSI C63.19-2011, Section 7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1¹ and ABM2². These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at $f = 1$ kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.⁴⁶ The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

¹ **Audio Band Magnetic signal - desired (ABM1):** Measured quantity of the desired magnetic signal

² **Audio Band Magnetic signal - undesired (ABM2):** Measured quantity of the undesired magnetic signal, such as interference from battery current and similar non-signal elements.


- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at f_i) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input–output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

- f. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- g. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

Test Setup Diagram

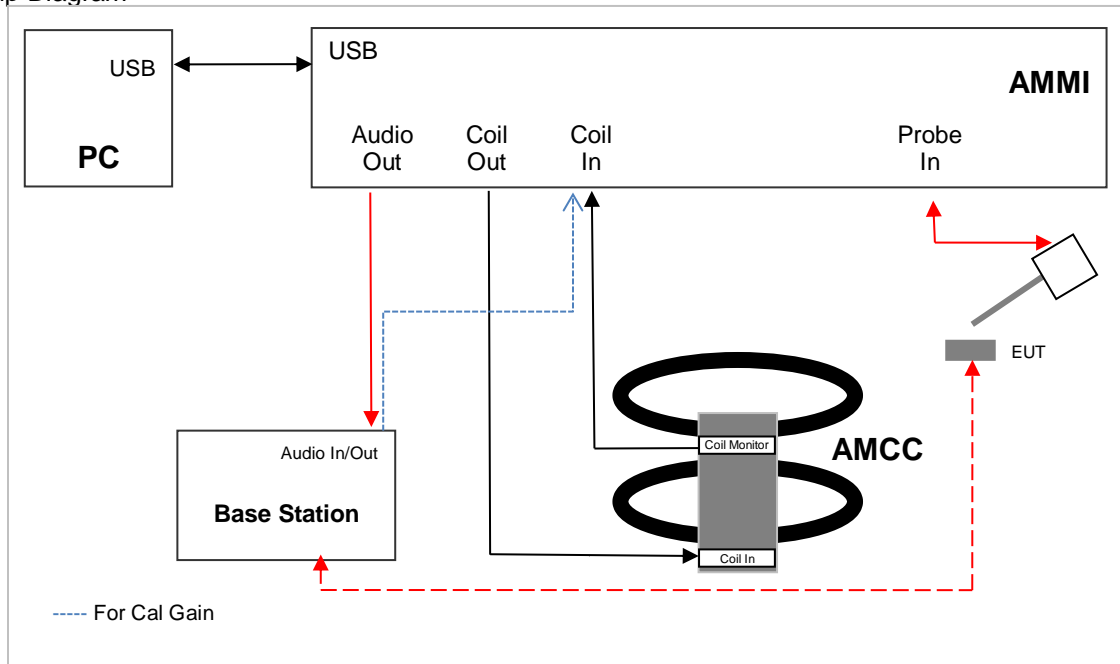

5.2. VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWiFi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over WI-FI via the Internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.


The set up for VoWiFi uses the base station as described in §5.1 with the exception that the reference audio level is set to -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to §6).

An investigation was performed to determine worst case codec, bit rate, and air interface configuration (refer to §9).

5.3. Over the Top (OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the FaceTime service, using **ACC-ELD** as its only codec (refer to §8.1 for air interface details and §9.6 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device³ connects to the cloud-based FaceTime service via Wi-Fi access point and router, or RJ45. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §9.6).

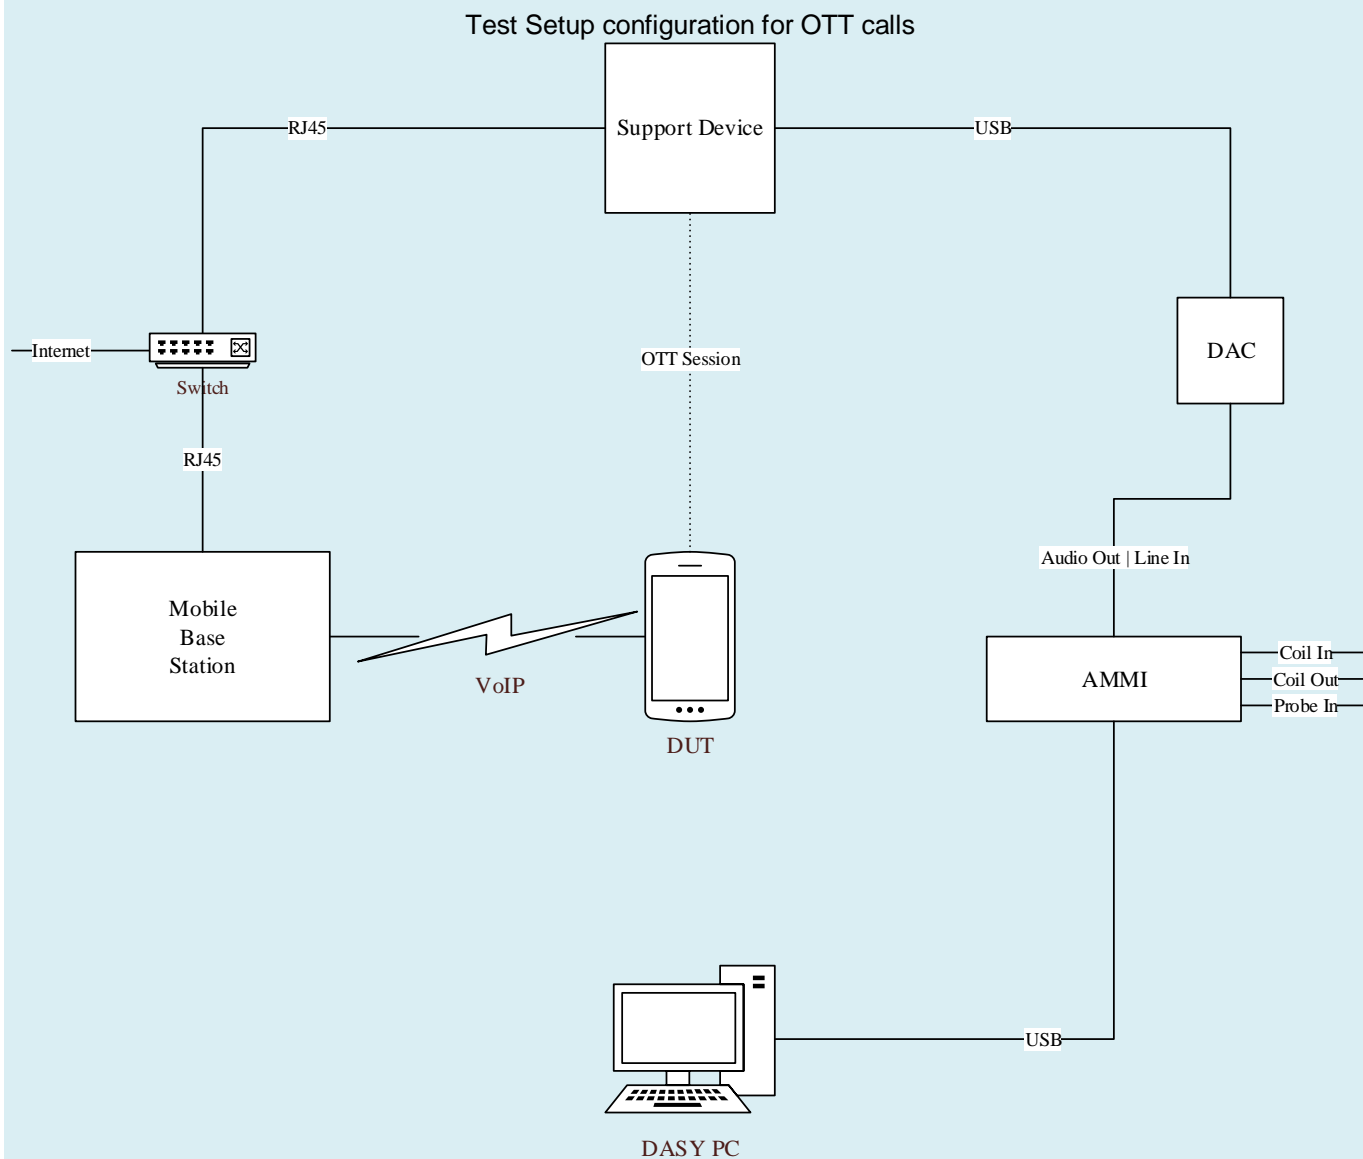

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

³ The support device is an iMac.

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs to be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

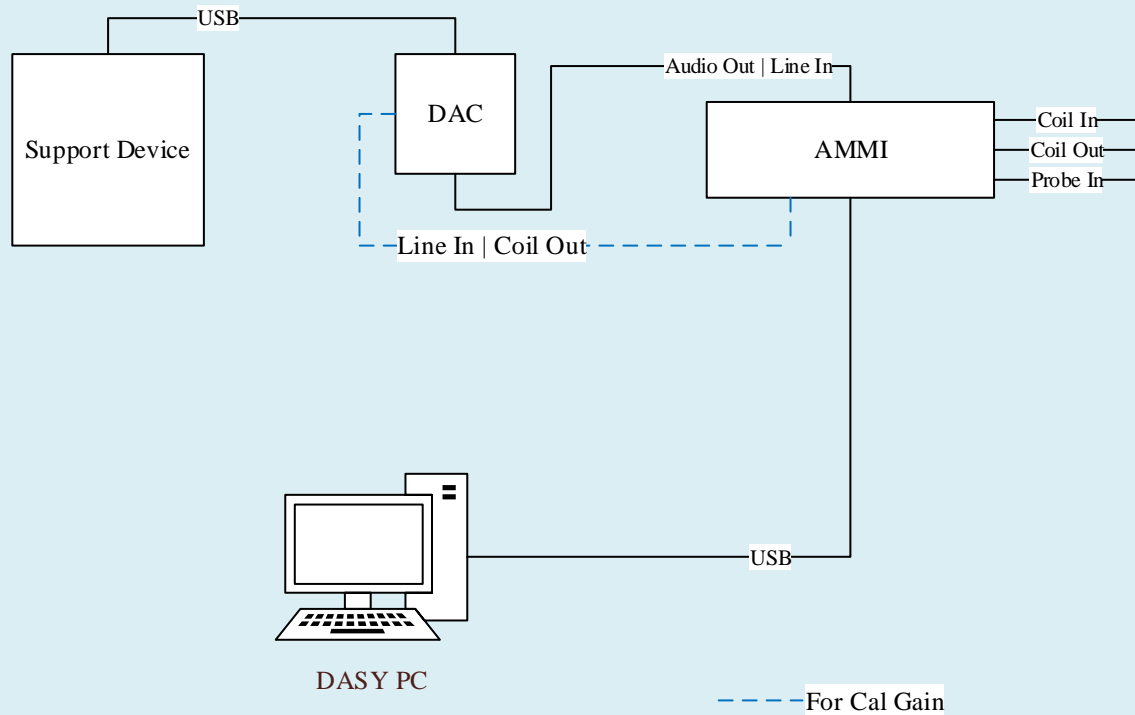

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §6 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

6. Audio Level and Gain Measurements

The adjusted gain was calculated using Speag's *TN-LK-05042018-D-T-Coil_Levels* document (please refer to Appendix E). First, the output of AMMI is determined in a closed loop, then, using the CMW500's input sensitivity, the adjusted gain required for testing can then be calculated. The adjusted linear gain used within this report is as follows:

6.1. GSM/W-CDMA and VoLTE

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-16.00	14.89	5.55
Voice 1 kHz	-16.00	27.62	24.04
Voice 300-3kHz	-16.00	33.47	47.15

The following software/firmware was used to simulate the VoLTE server for testing:

Firmware	License Keys	Software Name
V3.7.60 for LTE	KS500	LTE FDD R8 SIG BASIC
	KS550	LTE TDD R8 SIG BASIC
	KA100	IP APPL ENABLING IPv4
V3.7.20 for Audio	KA150	IP APPL ENABLING IPv6
	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

6.2. CDMA (1xRTT)

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-18.00	12.89	4.41
Voice 1 kHz	-18.00	25.62	19.10
Voice 300-3kHz	-18.00	31.47	37.45

6.3. VoWi-Fi – For PAG REUSE

Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-20.00	10.89	3.50
Voice 1 kHz	-20.00	23.62	15.17
Voice 300-3kHz	-20.00	29.47	29.75

Firmware	License Keys	Software Name
V3.7.40 for WLAN	KS650	WLAN A/B/G SIG BASIC
	KS651	WLAN N SIG BASIC
	KS656	WLAN IEEE 802.11ac
	KS657	WLAN IEEE 802.11ax
V3.7.20 for Audio	KA100	IP APPL ENABLING IPv4
	KA150	IP APPL ENABLING IPv6
	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

6.4. Over the Top (OTT) – For PAG REUSE

For EDGE, HSPA, Ev-Do, LTE, and Wi-Fi, the linear gain levels are listed below were used. The results below are based on a reference input level of -20 dBm0. Granted, the C63.19-2011 interpretation for T-coil audio levels for LTE states that an input reference level of -16 dBm0 should be used, we, the test lab, opted for -20 dBm0 for LTE due to it being a more conservative input reference level.

To calibrate the DAC (refer §5.3), three .wav audio files (sine wave, 1 kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


Signal type	Audio level [dBm0]	Gain [dB]	Gain (linear)
1 kHz sine	-20.00	18.68	8.59
Voice 1 kHz	-20.00	31.41	37.18
Voice 300-3kHz	-20.00	37.26	72.91

7. T-coil Measurement Criteria

7.1. Frequency Response


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

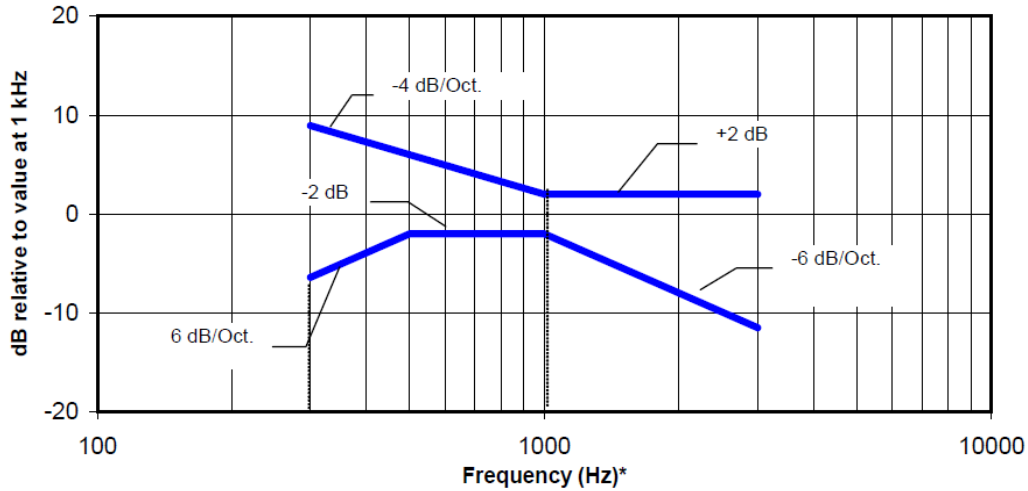

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.1—Magnetic field frequency response for WDs with field strength ≤ -15 dB (A/m) at 1 kHz

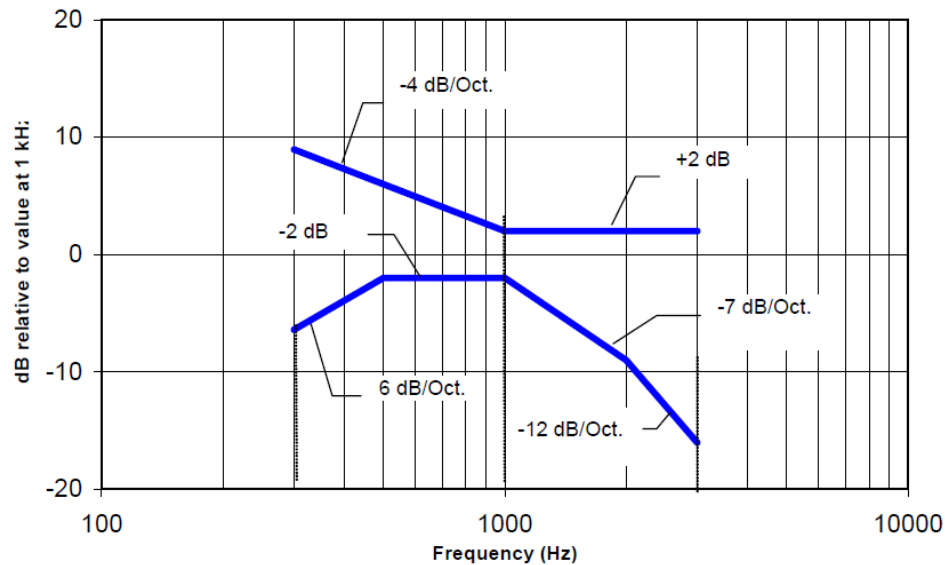

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds -15 dB(A/m) at 1 kHz

7.2. Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

Table 8.5—T-Coil signal-to-noise categories

Category	Telephone parameters WD signal quality [(signal + noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	>30 dB

Measurement locations and reference plane to be used for the T-coil measurements

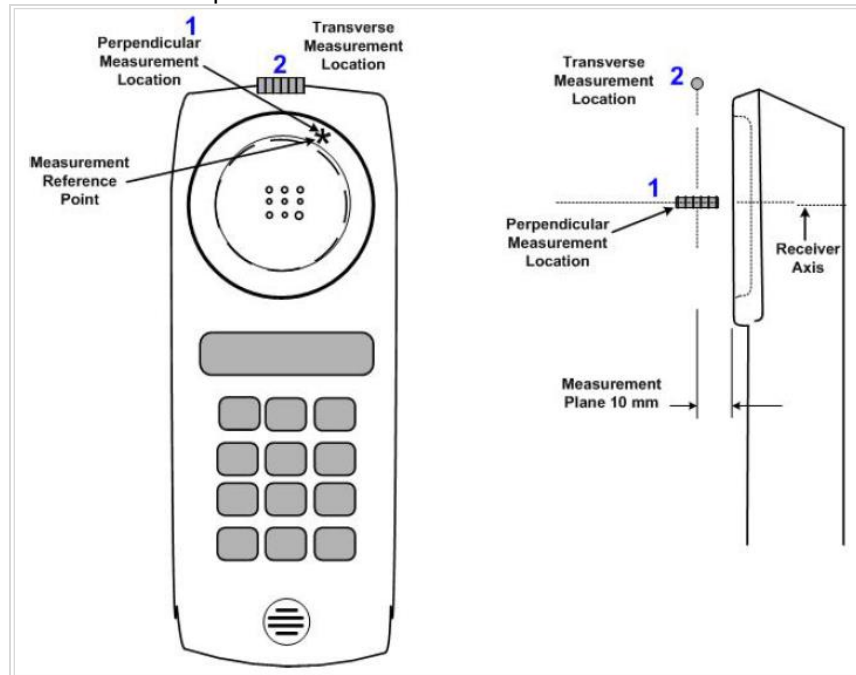

8. Device Under Test

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

ANT1 (all WWAN bands) - located at the lower of the device.

ANT2 (all WWAN bands except for LTE Band 48) - located at the upper of the device.

ANT3 (all WWAN bands above 1700 MHz and Wi-Fi 2.4 GHz and Bluetooth) – located at lower left corner of the device.

CDMA BC1 is not supported for this antenna.

ANT4 (all WWAN bands above 1700 MHz and Wi-Fi 2.4 GHz and Bluetooth) – located at upper right corner of the device.

CDMA BC1 is not supported for this antenna.

ANT5 (Wi-Fi 5 GHz Bands) – located at lower left corner of the device.

ANT6 (LTE Band 48 and Wi-Fi 5 GHz Bands) – located at upper left corner of the device.

Normal operation	Held to head
Back Cover	The Back Cover is not removable

8.1. Air Interfaces and Operating Mode

Air Interface	Bands (MHz)	Type	C63.19 Tested	Simultaneous Transmitter	OTT Testing Required? Name of Voice Service ¹	Power Reduction	Audio Codecs Evaluated
GSM	850	VO	Yes	Wi-Fi, BT	CMRS	NA	EFR
	1900					No	
	GPRS/EDGE	DT	Yes	Wi-Fi, BT	Yes ³ FaceTime ¹	NA	AAC-ELD
W-CDMA (UMTS)	850	VO	Yes	Wi-Fi, BT	CMRS	NA	AMR-NB & AMR-WB
	1700						
	1900	VD	Yes	Wi-Fi, BT	Yes ³ FaceTime ¹	NA	AAC-ELD
CDMA	800	VO	Yes	Wi-Fi, BT	CMRS	NA	EVRC & EVRC-B
	1900						
	Ev-Do	VD	Yes	Wi-Fi, BT	Yes ³ FaceTime ¹	NA	AAC-ELD
LTE - FDD	600 (B71)	VD	Yes	Wi-Fi, BT	Yes ³ FaceTime & VoLTE ¹	NA	AMR-NB, AMR-WB, EVS, & AAC-ELD
	700 (B12/13/14/17)						
	850 (B5/26)						
	1700 (B4/66)						
	1900 (B2/25)						
	2300 (B30)						
	2500 (B7)						
LTE – TDD	2600 (B41) ²	VD	Yes	Wi-Fi, BT	Yes ³ FaceTime & VoLTE ¹	NA	AMR-NB, AMR-WB, EVS, & AAC-ELD
	3600 (B48)						
Wi-Fi	2450	VD	Yes	WWAN	Yes ³ FaceTime & Wi-Fi calling ¹	NA	AMR-NB, AMR-WB, EVS, & AAC-ELD
	5200 (U-NII-1)			WWAN, BT			
	5300 (U-NII-2A)						
	5500 (U-NII-2C)						
	5800 (U-NII-3)						
BT	2450	DT	NA	WWAN, Wi-Fi 5GHz	NA	NA	N/A

Type
 VO: Legacy Cellular Voice Service
 DT: Digital Transport only (no voice)
 VD: IP Voice Service over Digital Transport
 CMRS: Commercial Mobile Radio Service

Note:
 1. For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 was used
 2. LTE-TDD was tested using Power Class II
 3. **For PAG REUSE**

9. Investigations (Antenna, Codec, & Air Interface)

9.1. Antenna Investigation

An investigation was performed to determine the worst-case antenna per technology. All subsequent measurements were determined by this investigation.

9.1.1. Standard Phone Application

Note	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
1	GSM 1900 Voice Coder Speechcodec Low	661 1880 MHz	N/A	ANT1	z (Axial)	10.06	-12.31	-51.60	2.00	37.12	T4
					y (Transversal)	0.47	-14.69	-51.57		35.81	T4
				ANT2	z (Axial)	10.39	-26.56	-51.60	2.00	36.94	T4
					y (Transversal)	0.89	-36.42	-51.57		37.31	T4
				ANT3	z (Axial)	10.56	-25.90	-51.60	2.00	36.45	T4
					y (Transversal)	0.66	-35.10	-51.57		35.75	T4
				ANT4	z (Axial)	10.30	-25.82	-51.60	2.00	36.13	T4
					y (Transversal)	0.73	-35.19	-51.57		35.92	T4
2	W-CDMA BII AMR-NB Bit rate: 4.75 kbps	9400 1880 MHz	N/A	ANT1	z (Axial)	-6.47	-28.35	-48.88	0.87	36.23	T4
					y (Transversal)	-11.92	-28.24	-48.02		31.51	T4
				ANT2	z (Axial)	-6.75	-28.04	-48.88	1.55	35.94	T4
					y (Transversal)	-11.89	-28.59	-48.02		31.73	T4
				ANT3	z (Axial)	-6.65	-28.21	-48.88	2.00	36.01	T4
					y (Transversal)	-12.00	-28.77	-48.02		31.63	T4
				ANT4	z (Axial)	-6.77	-28.17	-48.88	1.49	36.71	T4
					y (Transversal)	-12.19	-28.73	-48.02		31.56	T4
3	CDMA2000 BC1 RC1 / SO68 Full Fr Voice Coder: 8K EVRC Low	600 1880 MHz	N/A	ANT1	z (Axial)	4.16	-24.59	-49.84	1.94	43.06	T4
					y (Transversal)	-3.48	-26.56	-49.85		40.52	T4
				ANT2	z (Axial)	4.45	-24.48	-49.84	1.56	42.96	T4
					y (Transversal)	-3.35	-26.35	-49.85		39.97	T4

Note	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
4	LTE Band 25 QPSK 1/49 RB, AMR-NB Bit rate: 4.75 kbps	26365 1882.5 MHz	20 MHz	ANT1	z (Axial)	5.04	-28.04	-51.43	2.00	46.58	T4
					y (Transversal)	-2.47	-28.10	-51.57		38.96	T4
				ANT2	z (Axial)	5.57	-40.67	-51.43	2.00	46.23	T4
					y (Transversal)	-2.42	-40.92	-51.57		38.50	T4
				ANT3	z (Axial)	5.89	-40.98	-51.43	2.00	46.87	T4
					y (Transversal)	-2.24	-41.43	-51.57		39.19	T4
				ANT4	z (Axial)	5.92	-41.20	-51.43	1.96	47.12	T4
					y (Transversal)	-2.28	-42.39	-51.57		40.12	T4
5	LTE Band 41 QPSK 1/49 RB, AMR-NB Bit rate: 4.75 kbps	40620 2593 MHz	20 MHz	ANT1	z (Axial)	4.52	-16.76	-51.60	2.00	35.38	T4
					y (Transversal)	-3.38	-18.48	-51.54		35.38	T4
				ANT2	z (Axial)	4.70	-31.38	-51.60	2.00	36.09	T4
					y (Transversal)	-3.54	-39.25	-51.54		35.71	T4
				ANT3	z (Axial)	4.55	-30.66	-51.60	2.00	35.21	T4
					y (Transversal)	-3.65	-39.36	-51.54		35.71	T4
				ANT4	z (Axial)	4.56	-30.82	-51.60	1.76	35.38	T4
					y (Transversal)	-3.91	-39.21	-51.54		35.30	T4
	ANT6	z (Axial)	55990 3625 MHz	20 MHz	z (Axial)	7.63	-30.82	-49.23	1.92	38.45	T4
		y (Transversal)			-6.03	-42.18	-49.23		36.15	T4	
6	802.11b AMR-NB Bit rate: 4.75 kbps	6 2437 MHz	20 MHz	ANT3	z (Axial)	-4.17	-17.73	-51.53	1.62	39.21	T4
					y (Transversal)	-2.38	-25.34	-51.55		38.11	T4
				ANT4	z (Axial)	5.82	-20.80	-51.53	1.87	40.66	T4
					y (Transversal)	-2.60	-23.17	-51.55		36.90	T4
7	802.11a AMR-NB Bit rate: 4.75 kbps	36 5180 MHz	20 MHz	ANT5	z (Axial)	7.56	-29.44	-51.53	1.72	43.20	T4
					y (Transversal)	-1.40	-31.99	-51.55		40.98	T4
				ANT6	z (Axial)	7.23	-25.70	-51.53	1.76	41.84	T4
					y (Transversal)	-2.27	-27.89	-51.55		40.59	T4

Note(s):

1. ANT3 has been determined to be the worst-case antenna for GSM.
2. ANT1 has been determined to be the worst-case antenna for W-CDMA.
3. ANT2 has been determined to be the worst-case antenna for CDMA
4. ANT2 has been determined to be the worst-case antenna for LTE-FDD.
5. ANT3 has been determined to be the worst-case antenna for LTE-TDD.
6. ANT4 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
7. ANT6 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

9.1.2. OTT Application

Note	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
1	GSM 1900 EGPRS 2 Slots 20 kbps	661 1880 MHz	N/A	ANT1	z (Axial)	4.46	-16.68	-49.88	1.26	35.32	T4
					y (Transversal)	-8.02	-17.72	-49.84		32.95	T4
				ANT2	z (Axial)	4.42	-15.58	-49.88	1.07	34.55	T4
					y (Transversal)	-10.26	-17.62	-49.84		32.86	T4
				ANT3	z (Axial)	5.27	-14.09	-49.88	1.32	33.10	T4
					y (Transversal)	-10.45	-16.51	-49.84		32.53	T4
				ANT4	z (Axial)	4.45	-15.28	-49.88	1.19	34.52	T4
					y (Transversal)	-7.35	-18.71	-49.84		32.45	T4
2	W-CDMA BII HSPA 28 kbps	9400 1880 MHz	N/A	ANT1	z (Axial)	2.72	-28.92	-48.62	1.53	39.44	T4
					y (Transversal)	-7.90	-29.42	-47.73		33.90	T4
				ANT2	z (Axial)	2.37	-25.04	-48.62	1.58	38.25	T4
					y (Transversal)	-8.48	-27.50	-47.73		33.53	T4
				ANT3	z (Axial)	2.55	-25.08	-48.62	1.47	38.22	T4
					y (Transversal)	-8.16	-25.76	-47.73		33.27	T4
				ANT4	z (Axial)	2.54	-24.15	-48.62	1.45	37.68	T4
					y (Transversal)	-7.05	-26.29	-47.73		33.05	T4
3	CDMA2000 BC1 Ev-Do Rel. 0 28 kbps	600 1880 MHz	N/A	ANT1	z (Axial)	1.99	-26.96	-48.62	1.30	38.39	T4
					y (Transversal)	-5.59	-28.29	-47.73		33.85	T4
				ANT2	z (Axial)	0.53	-24.91	-48.62	1.30	36.21	T4
					y (Transversal)	-8.47	-27.45	-47.73		33.44	T4
4	CDMA2000 BC1 Ev-Do Rev. A 28 kbps	600 1880 MHz	N/A	ANT1	z (Axial)	2.70	-29.39	-48.75	1.34	38.64	T4
					y (Transversal)	-5.75	-31.00	-47.91		35.15	T4
				ANT2	z (Axial)	3.52	-29.15	-48.75	1.25	40.18	T4
					y (Transversal)	-4.75	-30.74	-47.91		36.09	T4

Note	Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating
5	LTE Band 25 QPSK 1/49 RB 28 kbps	26365 1882.5 MHz	20 MHz	ANT1	z (Axial)	2.93	-22.58	-48.75	1.34	36.88	T4
					y (Transversal)	-6.53	-24.04	-47.91		33.29	T4
				ANT2	z (Axial)	2.80	-22.08	-48.75	1.35	36.86	T4
					y (Transversal)	-7.40	-24.00	-47.91		33.35	T4
				ANT3	z (Axial)	3.25	-22.67	-48.75	1.28	37.01	T4
					y (Transversal)	-6.48	-23.71	-47.91		32.80	T4
				ANT4	z (Axial)	3.21	-21.92	-48.75	1.33	36.93	T4
					y (Transversal)	-7.59	-24.68	-47.91		33.32	T4
6	LTE Band 41 QPSK 1/49 RB 28 kbps	40620 2593 MHz	20 MHz	ANT1	z (Axial)	-2.19	-11.27	-48.75	1.20	30.29	T4
					y (Transversal)	-8.76	-14.54	-47.91		30.98	T4
				ANT2	z (Axial)	-0.69	-12.75	-48.75	1.14	30.79	T4
					y (Transversal)	-8.68	-14.93	-47.91		31.19	T4
				ANT3	z (Axial)	4.73	-17.93	-51.57	1.26	34.87	T4
					y (Transversal)	-3.93	-19.57	-51.49		35.20	T4
				ANT4	z (Axial)	4.27	-16.20	-51.57	1.32	33.41	T4
					y (Transversal)	-4.25	-17.97	-51.49		34.01	T4
	LTE Band 48 QPSK RB 1/49 28 kbps	55990 3625 MHz	20 MHz	ANT6	z (Axial)	5.41	-20.65	-49.23	1.18	36.31	T4
					y (Transversal)	-4.38	-22.80	-49.23		35.42	T4
7	802.11b	6 2437 MHz	20 MHz (1 Mbps)	ANT3	z (Axial)	7.57	-33.36	-51.57	1.26	40.92	T4
					y (Transversal)	-3.47	-40.37	-51.51		36.90	T4
				ANT4	z (Axial)	7.56	-34.14	-51.57	1.29	41.70	T4
					y (Transversal)	-3.48	-40.41	-51.51		36.93	T4
8	802.11a	36 5180 MHz	20 MHz (6 Mbps)	ANT5	z (Axial)	5.15	-28.95	-51.57	1.45	40.40	T4
					y (Transversal)	-4.03	-31.29	-51.51		37.47	T4
				ANT6	z (Axial)	7.33	-34.53	-51.57	1.48	41.86	T4
					y (Transversal)	-3.96	-41.46	-51.51		37.50	T4

Note:

1. ANT4 has been determined to be the worst-case antenna for GSM.
2. ANT4 has been determined to be the worst-case antenna for W-CDMA.
3. ANT2 has been determined to be the worst-case antenna for CDMA. Ev-Do Rel. 0.
4. ANT1 has been determined to be the worst-case antenna for CDMA Ev-Do Rev. A.
5. ANT3 has been determined to be the worst-case antenna for LTE-FDD.
6. ANT1 has been determined to be the worst-case antenna for LTE-TDD.
7. ANT3 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
8. ANT5 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

9.2. Standard Phone Application Codec Bit-rate Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each W-CDMA, LTE FDD and LTE TDD.

The highlighted results below were determined to be the worst case codec configuration(s) for LTE and W-CDMA.

W-CDMA Codec Investigation:

W-CDMA Codec Investigation								
Codec State	AMR-NB (kbps)			AMR-WB (kbps)			Orientation	Band/Channel/ Bandwidth
	4.75	7.4	12.2	6.6	15.85	23.85		
ABM1 (dB/m)	-6.47	-6.46	-6.28	-4.30	-5.19	-5.39	z (Axial)	W-CDMA BII Ch. 9400 ANT 1
ABM2 (dBA/m)	-28.35	-27.62	-28.31	-28.74	-29.39	-28.82		
SNR (dB)	36.23	36.56	36.99	39.18	38.26	37.70		
Freq. Resposne (dB)	0.87	1.87	1.76	1.78	1.81	2.00		
ABM1 (dB/m)	-11.92	-11.73	-11.84	-10.17	-10.26	-10.74	y (Transversal)	
ABM2 (dBA/m)	-28.24	-28.62	-25.15	-25.79	-30.03	-28.75		
SNR (dB)	31.51	31.63	30.64	31.98	32.67	32.49		

VoLTE Codec Investigation:

Codec Investigation											
Codec State	AMR-NB (kbps)			AMR-WB (kbps)			EVS (kbps)			Orientation	Band/Channel/ Bandwidth
	4.75	7.4	12.2	6.6	15.85	23.85	5.9	9.6	24.4		
ABM1 (dB/m)	5.57	6.14	6.31	5.09	6.24	6.35	2.74	2.79	3.16	z (Axial)	LTE Band 25 CH. 26365 1/49 RB QPSK 20 MHz BW ANT2
ABM2 (dBA/m)	-40.67	-40.86	-40.69	-27.69	-39.90	-41.45	-25.54	-39.59	-36.66		
SNR (dB)	46.23	47.00	47.00	46.34	46.13	47.81	42.39	42.38	39.81		
Freq. Resposne (dB)	2.00	2.00	2.00	1.88	2.00	2.00	2.00	1.10	1.58		
ABM1 (dB/m)	-2.42	-1.83	-1.58	-3.12	-1.93	-2.03	-5.26	-5.36	-5.14	y (Transversal)	
ABM2 (dBA/m)	-40.92	-40.95	-41.95	-28.90	-41.82	-42.40	-25.37	-42.94	-42.99		
SNR (dB)	38.50	39.12	40.37	39.96	39.89	40.38	37.62	37.59	37.86		
ABM1 (dB/m)	4.55	4.64	5.34	4.80	6.43	6.37	4.75	5.31	5.11	z (Axial)	
ABM2 (dBA/m)	-30.66	-13.84	-30.07	-16.47	-29.53	-29.39	-16.05	-29.23	-29.20		
SNR (dB)	35.21	33.07	35.41	35.31	35.96	35.76	33.86	34.54	34.31		
Freq. Resposne (dB)	2.00	2.00	2.00	2.00	2.00	2.00	2.00	1.29	1.65		
ABM1 (dB/m)	-3.65	-3.79	-3.25	-3.21	-2.14	-2.02	-3.65	-3.58	-3.42	y (Transversal)	
ABM2 (dBA/m)	-39.36	-14.33	-40.26	-17.94	-38.69	-38.71	-17.86	-38.12	-38.14		
SNR (dB)	35.71	31.26	37.01	35.97	36.55	36.69	35.18	34.54	34.72		

Note(s):

A bitrate investigation was performed on the pre-installed phone application to determine the worst-case bitrate:

1. For W-CDMA, it is observed that AMR-NB 12.20 kbps is the worst-case.
2. For LTE-FDD, it is observed that EVS 9.60 kbps is the worst-case.
3. For LTE-TDD, it is observed that AMR-NB 7.40 kbps is the worst-case.

9.3. Standard Phone Application Air Interface Investigation

Using the worst-case bitrate found in §9.2, a limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

W-CDMA Air Interface Investigation:

W-CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Bandwidth (if applicable)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
W-CDMA BII AMR-NB Bit rate: 12.2 kbps	9262 1852.4 MHz	N/A	ANT 1	z (Axial)	-3.93	-23.06	-48.78	1.70	38.12	T4	3.8, -0.4, 3.7
				y (Transversal)	-10.45	-26.15	-48.01		32.47	T4	2.5, -12.9, 3.7
	9400 1880.0 MHz	N/A	ANT 1	z (Axial)	-6.28	-28.31	-48.88	1.76	36.99	T4	3.8, -0.4, 3.7
				y (Transversal)	-11.84	-25.15	-48.02		30.64	T4	3.3, -13.3, 3.7
	9538 1907.6 MHz	N/A	ANT 1	z (Axial)	-3.93	-24.11	-48.78	1.79	38.07	T4	3.8, -0.4, 3.7
				y (Transversal)	-10.24	-25.78	-48.01		32.42	T4	2.5, -13.3, 3.7
W-CDMA BV AMR-NB Bit rate: 12.2 kbps	4132 826.4 MHz	N/A	ANT 1	z (Axial)	5.27	-30.72	-50.50	2.00	50.62	T4	8.8, -10, 3.7
				y (Transversal)	-2.99	-33.18	-50.41		41.52	T4	8.3, -17.5, 3.7
	4183 836.6 MHz	N/A	ANT 1	z (Axial)	-3.98	-23.86	-48.78	2.00	38.30	T4	3.8, -0.4, 3.7
				y (Transversal)	-10.50	-25.96	-48.01		32.43	T4	2.5, -12.9, 3.7
	4233 846.6 MHz	N/A	ANT 1	z (Axial)	5.40	-44.62	-50.50	2.00	50.10	T4	8.5, -10, 3.7
				y (Transversal)	0.55	-46.20	-50.41		46.75	T4	8.5, -17.3, 3.7

Note(s):

For all subsequent tests for W-CDMA, mid channel was used in conjunction with the worst-case bitrate found in §9.2.

VoLTE Air Interface Investigation:

VoLTE Air Interface Investigation													
Mode:	Bandwidth (if applicable)	Channel and Frequency	RB Allocation		Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
LTE Band 25 QPSK EVS Bit rate: 9.6 kbps	20 MHz	26140 1860 MHz	1	99	ANT 2	z (Axial)	4.44	-38.67	-51.43	1.28	43.12	T4	8, -11.5, 3.7
						y (Transversal)	-4.23	-41.80	-51.57		37.57	T4	11, -3.8, 3.7
		26365 1882.5 MHz	1	0	ANT 2	z (Axial)	4.09	-23.42	-51.43	0.93	42.49	T4	7.9, -11.7, 3.7
						y (Transversal)	-4.12	-25.98	-51.57		37.72	T4	10.8, -3.8, 3.7
			1	49	ANT 2	z (Axial)	2.79	-39.59	-51.43	1.10	42.38	T4	7.1, -9.4, 3.7
						y (Transversal)	-5.36	-42.94	-51.57		37.59	T4	8.7, -4.4, 3.7
			1	99	ANT 2	z (Axial)	4.73	-38.74	-51.43	0.74	43.48	T4	8, -11.5, 3.7
						y (Transversal)	-4.63	-41.77	-51.57		37.15	T4	11, -3.8, 3.7
			50	0	ANT 2	z (Axial)	4.45	-40.46	-51.43	0.80	44.92	T4	8, -11.5, 3.7
						y (Transversal)	-4.49	-41.80	-51.57		37.32	T4	11, -3.8, 3.7
			50	24	ANT 2	z (Axial)	4.50	-40.22	-51.43	1.21	44.72	T4	8, -11.5, 3.7
						y (Transversal)	-4.39	-41.72	-51.57		37.33	T4	11, -3.8, 3.7
			50	49	ANT 2	z (Axial)	4.46	-40.73	-51.43	1.21	45.19	T4	8, -11.5, 3.7
						y (Transversal)	-4.39	-42.24	-51.57		37.85	T4	11, -3.8, 3.7
			100	0	ANT 2	z (Axial)	4.31	-40.99	-51.43	1.29	45.30	T4	8, -11.5, 3.7
						y (Transversal)	-4.43	-42.09	-51.57		37.66	T4	11, -3.8, 3.7
26590 1905 MHz	1	99	ANT 2	z (Axial)	4.40	-36.73	-51.43	1.51	41.13	T4	8, -11.5, 3.7		
				y (Transversal)	-4.64	-40.90	-51.57		36.26	T4	11, -3.8, 3.7		
LTE Band 25 16QAM EVS Bit rate: 9.6 kbps	20 MHz	26590 1905 MHz	1	99	ANT 2	z (Axial)	4.49	-31.47	-51.43	1.23	35.96	T4	8.2, -11.5, 3.7
						y (Transversal)	-5.17	-37.80	-51.57		32.63	T4	9.4, -4.8, 3.7
LTE Band 25 64QAM EVS Bit rate: 9.6 kbps	20 MHz	26590 1905 MHz	1	99	ANT 2	z (Axial)	4.60	-27.33	-51.43	1.30	31.93	T4	8.2, -11.5, 3.7
						y (Transversal)	-4.82	-38.01	-51.57		33.19	T4	9.4, -4.8, 3.7
LTE Band 26 64QAM EVS Bit rate: 9.6 kbps	15 MHz	26965 841.5 MHz	1	74	ANT 2	z (Axial)	4.41	-23.84	-51.43	1.29	41.51	T4	8.3, -10.4, 3.7
						y (Transversal)	-2.38	-27.23	-51.57		37.13	T4	8.8, -17.1, 3.7
LTE Band 12 64QAM EVS Bit rate: 9.6 kbps	10 MHz	23130 711 MHz	1	49	ANT 2	z (Axial)	4.93	-37.50	-51.43	1.48	42.43	T4	8.4, -10.5, 3.7
						y (Transversal)	-3.05	-39.76	-51.57		36.71	T4	8.6, -16.9, 3.7

Note(s):

For all subsequent tests for LTE-FDD, high channel, 64QAM, 1% RB size and high RB allocation were used in conjunction with the worst-case bitrate found in §9.2.

VoLTE Air Interface Investigation (continued):

VoLTE Air Interface Investigation													
Mode:	Bandwidth (if applicable)	Channel and Frequency	RB Allocation		Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
LTE Band 41 QPSK AMR-NB Bit rate: 7.4 kbps	20 MHz	39750 2506 MHz	1	49	ANT 3	z (Axial)	4.80	-29.77	-51.43	2.00	34.58	T4	8, -11.5, 3.7
						y (Transversal)	-3.41	-39.14	-51.57		35.73	T4	7.7, -16.3, 3.7
		40185 2549.5 MHz	1	49	ANT 3	z (Axial)	4.78	-31.20	-51.43	2.00	35.99	T4	8, -11.5, 3.7
						y (Transversal)	-3.17	-40.25	-51.57		37.08	T4	7.7, -16.3, 3.7
		40620 2593 MHz	1	0	ANT 3	z (Axial)	4.90	-31.24	-51.43	2.00	36.14	T4	8, -11.5, 3.7
						y (Transversal)	-3.19	-40.46	-51.57		37.26	T4	7.7, -16.3, 3.7
			1	49	ANT 3	z (Axial)	4.64	-13.84	-51.43	2.00	33.07	T4	7.9, -11.7, 3.7
						y (Transversal)	-3.79	-14.33	-51.57		31.26	T4	7.5, -16.3, 3.7
			1	99	ANT 3	z (Axial)	4.80	-30.82	-51.43	2.00	35.62	T4	8, -11.5, 3.7
						y (Transversal)	-3.36	-40.50	-51.57		37.14	T4	7.7, -16.3, 3.7
			50	0	ANT 3	z (Axial)	4.86	-30.46	-51.43	2.00	35.31	T4	8, -11.5, 3.7
						y (Transversal)	-3.37	-39.58	-51.57		36.20	T4	7.7, -16.3, 3.7
			50	24	ANT 3	z (Axial)	4.91	-30.11	-51.43	2.00	35.02	T4	8, -11.5, 3.7
						y (Transversal)	-3.34	-39.40	-51.57		36.07	T4	7.7, -16.3, 3.7
		50	49	ANT 3	z (Axial)	4.95	-30.27	-51.43	2.00	35.22	T4	8, -11.5, 3.7	
					y (Transversal)	-3.27	-39.55	-51.57		36.28	T4	7.7, -16.3, 3.7	
		100	0	ANT 3	z (Axial)	4.96	-29.93	-51.43	2.00	34.89	T4	8, -11.5, 3.7	
					y (Transversal)	-3.26	-38.97	-51.57		35.71	T4	7.7, -16.3, 3.7	
41055 2636.5 MHz	1	49	ANT 3	z (Axial)	4.95	-30.88	-51.43	2.00	35.83	T4	8, -11.5, 3.7		
				y (Transversal)	-3.23	-40.03	-51.57		36.80	T4	7.7, -16.3, 3.7		
41490 2680 MHz	1	49	ANT 3	z (Axial)	4.95	-29.43	-51.43	1.80	34.39	T4	8, -11.5, 3.7		
				y (Transversal)	-3.29	-39.06	-51.57		35.78	T4	7.7, -16.3, 3.7		
LTE Band 41 QPSK AMR-NB Bit rate: 7.4 kbps	15 MHz	40620 2593 MHz	1	37	ANT 3	z (Axial)	4.80	-33.22	-51.43	2.00	38.03	T4	8, -11.5, 3.7
						y (Transversal)	-3.21	-41.26	-51.57		38.05	T4	7.7, -16.3, 3.7
LTE Band 41 QPSK AMR-NB Bit rate: 7.4 kbps	10 MHz	40620 2593 MHz	1	25	ANT 3	z (Axial)	4.90	-30.14	-51.43	2.00	35.04	T4	8, -11.5, 3.7
						y (Transversal)	-3.22	-38.95	-51.57		35.74	T4	7.7, -16.3, 3.7
LTE Band 41 16QAM AMR-NB Bit rate: 7.4 kbps	20 MHz	40620 2593 MHz	1	49	ANT 3	z (Axial)	4.92	-29.30	-51.43	2.00	34.22	T4	8, -11.5, 3.7
						y (Transversal)	-3.23	-38.17	-51.57		34.95	T4	7.7, -16.3, 3.7
LTE Band 41 64QAM AMR-NB Bit rate: 7.4 kbps	20 MHz	40620 2593 MHz	1	49	ANT 3	z (Axial)	4.84	-29.48	-51.43	2.00	34.32	T4	8, -11.5, 3.7
						y (Transversal)	-3.23	-38.31	-51.57		35.08	T4	7.7, -16.3, 3.7

Note(s):

For all subsequent tests for LTE-TDD, mid channel, QPSK, 1% RB size and mid RB allocation were used in conjunction with the worst-case bitrate found in §9.2.

9.4. Standard Phone Application VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4GHz and 5GHz.

The highlighted results below were determined to be the worst case codec configuration(s) for Wi-Fi 2.4GHz and 5GHz

Codec Investigation											
Codec State	AMR-NB (kbit/s)			AMR-WB (kbit/s)			EVS (kbit/s)			Orientation	Band/Channel/ Bandwidth
	4.75	7.4	12.2	6.6	15.85	23.85	5.9	9.6	24.4		
ABM1 (dB/m)	7.48	8.20	8.39	7.10	8.28	8.37	7.24	7.80	6.79	z (Axial)	802.11b Ch. 6 DSSS 1 Mbps ANT4
ABM2 (dBA/m)	-22.61	-33.27	-33.30	-33.32	-33.39	-33.36	-33.06	-32.81	-32.27		
SNR (dB)	41.76	41.47	41.69	40.42	41.67	41.73	40.30	40.61	39.06		
Freq. Resposne (dB)	1.97	2.00	2.00	2.00	2.00	2.00	1.69	1.07	1.60		
ABM1 (dB/m)	-1.44	-0.83	-0.64	-1.98	-0.66	-0.75	-1.97	-2.12	-1.23	y (Transversal)	802.11b Ch. 6 DSSS 1 Mbps ANT4
ABM2 (dBA/m)	-26.13	-34.32	-38.99	-38.44	-38.71	-38.74	-38.48	-37.83	-37.70		
SNR (dB)	38.69	33.49	38.34	36.46	38.05	37.99	36.51	35.71	36.47		
ABM1 (dB/m)	7.23	4.98	6.96	2.99	4.19	4.16	4.96	3.72	4.02	z (Axial)	802.11a Ch. 36 BPSK 6 Mbps ANT6
ABM2 (dBA/m)	-25.70	-29.59	-40.08	-31.53	-42.65	-43.01	-30.55	-33.45	-34.16		
SNR (dB)	41.84	41.57	47.04	46.04	46.84	47.17	46.93	37.18	38.18		
Freq. Resposne (dB)	1.76	2.00	2.00	1.99	1.95	1.96	2.00	1.26	2.00		
ABM1 (dB/m)	-2.27	-3.78	-3.16	-5.65	-4.42	-4.55	-3.99	-4.86	-4.99	y (Transversal)	802.11a Ch. 36 BPSK 6 Mbps ANT6
ABM2 (dBA/m)	-27.89	-31.19	-44.11	-23.89	-46.25	-46.66	-32.47	-46.81	-47.21		
SNR (dB)	40.59	39.39	40.95	41.26	41.83	42.11	42.29	41.94	42.22		

Note(s):

A bitrate investigation was performed on the pre-installed phone application to determine the worst-case bitrate:

1. For 802.11b, it is observed that AMR-NB 7.40 kbps is the worst-case.
2. For 802.11a, it is observed that EVS 9.60 kbps is the worst-case.

9.5. Standard Phone Application VoWi-Fi Air Interface Investigation

VoWi-Fi Air Interface Investigation:

VoWi-Fi Air Interface Investigation												
Mode:	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
802.11b AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	ANT4	CCK	5.5 Mbps	z (Axial)	8.52	-33.29	-51.53	1.98	41.81	T4	9.9, -10.8, 3.7
					y (Transversal)	-1.05	-38.92	-51.55		37.87	T4	8.6, -16.5, 3.7
				11 Mbps	z (Axial)	8.57	-33.50	-51.53	2.00	42.07	T4	9.9, -10.8, 3.7
					y (Transversal)	-0.95	-38.82	-51.55		37.87	T4	8.6, -16.5, 3.7
802.11g AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	ANT4	DSSS	1 Mbps	z (Axial)	5.41	-22.34	-51.53	1.91	44.85	T4	7.1, -11.3, 3.7
					y (Transversal)	-2.34	-24.40	-51.55		39.36	T4	10, -3.8, 3.7
			QPSK	12 Mbps	z (Axial)	5.52	-42.67	-51.53	2.00	48.19	T4	7, -11.2, 3.7
					y (Transversal)	-2.59	-46.42	-51.55		43.83	T4	9.9, -4, 3.7
			64QAM	54 Mbps	z (Axial)	5.74	-43.20	-51.53	1.89	48.94	T4	7, -11.2, 3.7
					y (Transversal)	-2.64	-46.49	-51.55		43.85	T4	9.9, -4, 3.7
802.11n AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	ANT4	MCS0	6.5 Mbps	z (Axial)	6.40	-26.52	-51.53	1.74	46.95	T4	8.3, -12.9, 3.7
					y (Transversal)	-2.24	-28.75	-51.55		42.96	T4	10.4, -3.8, 3.7
			MCS3	26 Mbps	z (Axial)	6.62	-41.74	-51.53	1.96	48.37	T4	8.2, -12.7, 3.7
					y (Transversal)	-2.43	-46.23	-51.55		43.80	T4	10.2, -3.6, 3.7
			MCS7	65 Mbps	z (Axial)	7.09	-41.61	-51.53	2.00	48.70	T4	8.2, -12.7, 3.7
					y (Transversal)	-2.38	-46.02	-51.55		43.64	T4	10.3, -3.6, 3.7
802.11ac AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	ANT4	MCS0	6.5 Mbps	z (Axial)	4.98	-30.80	-51.56	1.65	41.75	T4	11.3, -11.3, 3.7
					y (Transversal)	-3.81	-32.19	-51.51		39.05	T4	8.3, -17.1, 3.7
			MCS4	39 Mbps	z (Axial)	6.75	-36.48	-51.56	2.00	43.23	T4	11.2, -11.1, 3.7
					y (Transversal)	-3.78	-42.96	-51.51		39.18	T4	8.5, -17, 3.7
			MCS8	78 Mbps	z (Axial)	6.45	-34.72	-51.56	2.00	41.18	T4	11.2, -11.1, 3.7
					y (Transversal)	-3.88	-43.06	-51.51		39.18	T4	8.5, -17, 3.7
802.11ax AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	ANT4	MCS0	7.3 Mbps	z (Axial)	4.64	-30.80	-51.56	2.00	41.65	T4	11.7, -12.1, 3.7
					y (Transversal)	-3.53	-31.89	-51.51		38.97	T4	9.2, -17.9, 3.7
			MCS5	58.5 Mbps	z (Axial)	6.46	-35.45	-51.56	2.00	41.91	T4	11.7, -11.9, 3.7
					y (Transversal)	-3.48	-42.35	-51.51		38.87	T4	9.3, -18, 3.7
			MCS9	97.5 Mbps	z (Axial)	6.49	-36.60	-51.56	2.00	43.09	T4	11.7, -11.9, 3.7
					y (Transversal)	-3.39	-42.49	-51.51		39.10	T4	9.3, -18, 3.7
802.11a EVS Bit rate: 9.6 kbps	36 5180 MHz	ANT6	QPSK	18 Mbps	z (Axial)	2.99	-41.17	-51.56	1.07	44.16	T4	8.3, -12.2, 3.7
					y (Transversal)	-6.01	-43.45	-51.51		37.44	T4	11.7, -0.8, 3.7
			64QAM	54 Mbps	z (Axial)	2.72	-41.37	-51.56	1.00	44.09	T4	8.3, -12.2, 3.7
					y (Transversal)	-6.11	-43.24	-51.51		37.13	T4	11.7, -0.7, 3.7
802.11n 20 MHz EVS Bit rate: 9.6 kbps	36 5180 MHz	ANT6	MCS0	6.5 Mbps	z (Axial)	2.79	-28.17	-51.56	1.24	43.88	T4	8.3, -9.2, 3.7
					y (Transversal)	-6.44	-29.44	-51.51		40.16	T4	9.2, -2.9, 3.7
			MCS3	26 Mbps	z (Axial)	1.83	-40.78	-51.56	1.13	42.62	T4	8.2, -9.3, 3.7
					y (Transversal)	-6.53	-44.91	-51.51		38.38	T4	9, -2.9, 3.7
			MCS7	65 Mbps	z (Axial)	1.91	-40.65	-51.56	1.49	42.56	T4	8.2, -9.3, 3.7
					y (Transversal)	-6.59	-46.47	-51.51		39.88	T4	9, -2.9, 3.7
802.11n 40 MHz EVS Bit rate: 9.6 kbps	38 5190 MHz	ANT6	MCS0	13.5 Mbps	z (Axial)	2.13	-27.17	-51.56	1.03	43.57	T4	8.3, -12.5, 3.7
					y (Transversal)	-5.49	-27.99	-51.51		40.96	T4	8.3, -0.8, 3.7
			MCS3	54 Mbps	z (Axial)	2.05	-41.15	-51.56	1.28	43.20	T4	8.2, -12.5, 3.7
					y (Transversal)	-5.69	-44.76	-51.51		39.07	T4	8.4, -0.9, 3.7
			MCS7	135 Mbps	z (Axial)	1.91	-41.27	-51.56	1.36	43.18	T4	8.2, -12.5, 3.7
					y (Transversal)	-6.73	-44.75	-51.51		38.02	T4	8.4, -0.9, 3.7
802.11ac 20 MHz EVS Bit rate: 9.6 kbps	36 5180 MHz	ANT6	MCS0	6.5 Mbps	z (Axial)	1.42	-27.99	-51.56	1.14	42.63	T4	7.5, -10.4, 3.7
					y (Transversal)	-5.75	-25.13	-51.51		40.72	T4	10.8, -2.9, 3.7
			MCS4	39 Mbps	z (Axial)	1.75	-41.63	-51.56	1.45	43.38	T4	7.6, -10.7, 3.7
					y (Transversal)	-6.55	-43.47	-51.51		36.92	T4	10.8, -2.9, 3.7
			MCS8	78 Mbps	z (Axial)	2.63	-40.20	-51.56	1.42	42.83	T4	7.6, -10.7, 3.7
					y (Transversal)	-5.85	-44.60	-51.51		38.76	T4	10.8, -2.9, 3.7

VoWi-Fi Air Interface Investigation (continued):

VoWi-Fi Air Interface Investigation												
Mode:	Channel and Frequency	Antenna	Modulation/Index	Data Rate	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABMSNR (dB)	T-Rating	Location
802.11ac 40 MHz EVS Bit rate: 9.6 kbps	38 5190 MHz	ANT6	MCS0	13.5 Mbps	z (Axial)	2.41	-27.82	-51.56	1.27	43.84	T4	8.3, -12.5, 3.7
					y (Transversal)	-5.55	-29.95	-51.51		40.44	T4	10.8, -1.7, 3.7
			MCS5	108 Mbps	z (Axial)	2.57	-40.95	-51.56	1.37	43.52	T4	8.2, -12.4, 3.7
					y (Transversal)	-5.40	-44.27	-51.51		38.88	T4	10.8, -1.5, 3.7
			MCS9	180 Mbps	z (Axial)	3.65	-41.53	-51.56	1.05	45.19	T4	8.2, -12.4, 3.7
					y (Transversal)	-6.15	-43.95	-51.51		37.81	T4	10.8, -1.5, 3.7
802.11ac 80 MHz EVS Bit rate: 9.6 kbps	42 5210 MHz	ANT6	MCS0	13.5 Mbps	z (Axial)	1.78	-28.15	-51.56	1.33	43.62	T4	7.9, -12.9, 3.7
					y (Transversal)	-6.15	-29.89	-51.51		40.19	T4	9.6, -2.5, 3.7
			MCS5	108 Mbps	z (Axial)	1.44	-41.87	-51.56	1.27	43.31	T4	8, -13.2, 3.7
					y (Transversal)	-5.89	-44.66	-51.51		38.77	T4	9.7, -2.5, 3.7
			MCS9	180 Mbps	z (Axial)	2.01	-41.79	-51.56	1.23	43.81	T4	8, -13.2, 3.7
					y (Transversal)	-5.99	-44.70	-51.51		38.70	T4	9.7, -2.5, 3.7
802.11ax 20 MHz EVS Bit rate: 9.6 kbps	36 5180 MHz	ANT6	MCS0	8.6 Mbps	z (Axial)	3.50	-30.68	-51.55	1.32	39.58	T4	9.6, -9.2, 3.7
					y (Transversal)	-4.72	-31.49	-51.58		37.08	T4	8.8, -17.1, 3.7
			MCS6	77 Mbps	z (Axial)	4.42	-35.05	-51.55	1.29	39.46	T4	9.6, -9.3, 3.7
					y (Transversal)	-4.94	-41.97	-51.58		37.03	T4	8.6, -17, 3.7
			MCS9	97.5 Mbps	z (Axial)	4.99	-34.99	-51.55	1.26	39.98	T4	9.6, -9.3, 3.7
					y (Transversal)	-4.88	-42.04	-51.58		37.17	T4	8.6, -17, 3.7
802.11ax 40 MHz EVS Bit rate: 9.6 kbps	38 5190 MHz	ANT6	MCS0	17.2 Mbps	z (Axial)	3.93	-30.84	-51.55	1.14	39.90	T4	11.7, -11.7, 3.7
					y (Transversal)	-4.62	-31.27	-51.58		37.17	T4	9.2, -17.1, 3.7
			MCS6	155 Mbps	z (Axial)	6.13	-35.30	-51.55	1.52	41.43	T4	11.7, -11.8, 3.7
					y (Transversal)	-4.90	-41.72	-51.58		36.83	T4	9.3, -17.1, 3.7
			MCS9	195 Mbps	z (Axial)	5.49	-35.43	-51.55	1.45	40.92	T4	11.7, -11.8, 3.7
					y (Transversal)	-4.62	-41.74	-51.58		37.13	T4	9.3, -17.1, 3.7
802.11ax 80 MHz EVS Bit rate: 9.6 kbps	42 5210 MHz	ANT6	MCS0	36 Mbps	z (Axial)	2.33	-32.34	-51.55	1.13	46.02	T4	8.3, -9.2, 3.7
					y (Transversal)	-6.58	-33.06	-51.58		40.47	T4	9.2, 0.8, 3.7
			MCS6	324 Mbps	z (Axial)	2.83	-32.09	-51.55	1.23	34.92	T4	8.3, -9.3, 3.7
					y (Transversal)	-6.12	-47.01	-51.58		40.89	T4	9.2, 0.7, 3.7
			MCS9	408.3 Mbps	z (Axial)	2.99	-31.86	-51.55	0.66	34.85	T4	8.3, -9.3, 3.7
					y (Transversal)	-6.02	-46.85	-51.58		40.83	T4	9.2, 0.7, 3.7

Note(s):

- For all subsequent tests for 2.4 GHz, 802.11b CCK 1 Mbps was used in conjunction with the worst-case bitrate found in §9.4. CCK 1 Mbps was used for Codec investigation. After Air interface investigation was completed, it was found to be the worst case mode. Refer to §9.4 for CCK 1 Mbps SNR.
- For all subsequent tests for 5 GHz, 802.11ax HE80 MCS9 408.3 Mbps was used in conjunction with the worst-case bitrate found in §9.4.

9.6. OTT Codec Investigation

The OTT Application did not support a means for the test lab to change the codec's bitrates. When a VoIP call was established, the test lab recorded the bitrate used during that session for the supported technologies: EDGE was tested using 20.00 kbps as its worst-case bitrate; HSPA was tested using 28.00 kbps as its worst-case bitrate; Ev-Do was tested using 28.00 kbps as its worst-case bitrate; LTE-FDD and LTE-TDD was tested using 28.00 kbps as its worst-case bitrate; 802.11b was tested using 48.00 kbps as its worst-case bitrate; and 802.11a was tested using 48.00 kbps as its worst-case bitrate.

Codec Bitrate per Technology (kbps)	
EDGE	20.00
HSPA	28.00
Rel. 0	28.00
Rev. A	28.00
LTE	28.00
Wi-Fi	48.00

9.7. OTT Air Interface Investigation

VoLTE's and VoWi-Fi's Air Interface Investigations were not evaluated as VoLTE and VoWi-Fi share the same PS Domain to establish a voice call; thus, VoLTE's and VoWi-Fi's worst-case modulation/channel/bandwidth were leveraged from the Standard Phone Application's Air Interface Investigation, §9.3 & 9.5.

GSM Air Interface Investigation:

GSM Air Interface Investigation											
Mode:	Channel and Frequency	Bandwidth (if applicable)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
GSM1900 EDGE/EGPRS 2 Slots 20 kbps	512 1850.2 MHz	N/A	ANT4	z (Axial)	5.09	-16.89	-49.88	1.28	35.17	T4	9.2, -11.7, 3.7
				y (Transversal)	-6.93	-17.94	-49.84		32.65	T4	7.5, -14.6, 3.7
	661 1880 MHz	N/A	ANT4	z (Axial)	4.45	-15.28	-49.88	1.19	34.52	T4	7.9, -11.3, 3.7
				y (Transversal)	-7.35	-18.71	-49.84		32.45	T4	8.8, -14.2, 3.7
	810 1909.8 MHz	N/A	ANT4	z (Axial)	3.89	-13.90	-49.88	1.14	32.69	T4	8.8, -8.8, 3.7
				y (Transversal)	-8.92	-16.75	-49.84		32.82	T4	7.1, -13.3, 3.7

Note(s):

For all subsequent tests for GSM EDGE, mid channel was used in conjunction with the worst-case bitrate found in §9.6.

W-CDMA Air Interface Investigation:

W-CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Bandwidth (if applicable)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
W-CDMA BII HSPA 28 kbps	9262 1852.4 MHz	N/A	ANT4	z (Axial)	4.61	-28.32	-51.57	1.47	40.37	T4	10.8, -11.3, 3.7
				y (Transversal)	-4.03	-29.58	-51.49		37.56	T4	8.3, -17.1, 3.7
	9400 1880.0 MHz	N/A	ANT4	z (Axial)	2.54	-24.15	-48.62	1.45	37.68	T4	7.9, -10.4, 3.7
				y (Transversal)	-7.05	-26.29	-47.73		33.05	T4	8.8, -2.9, 3.7
	9538 1907.6 MHz	N/A	ANT4	z (Axial)	4.52	-28.71	-51.57	1.37	40.12	T4	10.8, -11.3, 3.7
				y (Transversal)	-4.11	-28.38	-51.49		36.86	T4	8.3, -17.1, 3.7

Note(s):

For all subsequent tests for W-CDMA HSPA, mid channel was used in conjunction with the worst-case bitrate found in §9.6.

CDMA Air Interface Investigation:

CDMA Air Interface Investigation											
Mode:	Channel and Frequency	Bandwidth (if applicable)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location
CDMA B1 Ev-Do Rel. 0 28 kbps	25 1851.25 MHz	N/A	ANT 2	z (Axial)	4.79	-26.59	-51.69	1.61	40.07	T4	11.3, -12.1, 3.7
				y (Transversal)	-5.05	-27.11	-51.60		36.46	T4	12.1, -3.8, 3.7
	600 1880.00 MHz	N/A	ANT 2	z (Axial)	0.53	-24.91	-48.62	1.30	36.21	T4	7.9, -12.5, 3.7
				y (Transversal)	-8.47	-27.45	-47.73		33.44	T4	8.3, -3.8, 3.7
	1175 1908.75 MHz	N/A	ANT 2	z (Axial)	4.86	-24.96	-51.69	1.58	39.36	T4	10.8, -12.1, 3.7
				y (Transversal)	-5.08	-26.94	-51.60		36.34	T4	12.1, -3.8, 3.7
CDMA B1 Ev-Do Rev. A 28 kbps	600 1880.00 MHz	N/A	ANT 1	z (Axial)	2.70	-29.39	-48.75	1.34	38.64	T4	9.6, -8.3, 3.7
				y (Transversal)	-5.75	-31.00	-47.91		35.15	T4	8.8, -15.8, 3.7

Note(s):

For all subsequent tests for CDMA Ev-Do, mid channel and Ev-Do Rel. 0 were used in conjunction with the worst-case bitrate found in §9.6.

10. HAC (T-coil) Test Results

As the margin for the worst-case T-rating is greater than T3/T4, no further investigation is required into the technology's supported channels to confirm the T-rating.

10.1. Standard Phone Application

GSM/W-CDMA/CDMA:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
GSM 850 Voice Coder Speechcodec Low	190 836.6 MHz	N/A	ANT 1	z (Axial)	10.39	-9.04	-51.60	2.00	34.43	T4	7.9, -12.1, 3.7	1 - 3
				y (Transversal)	-4.16	-11.49	-51.57		34.24	T4	5.8, -13.3, 3.7	
GSM 1900 Voice Coder Speechcodec Low	661 1880 MHz	N/A	ANT 3	z (Axial)	10.56	-25.90	-51.60	2.00	36.45	T4	8.5, -12, 3.7	4 - 6
				y (Transversal)	0.66	-35.10	-51.57		35.75	T4	8, -15.3, 3.7	
W-CDMA BII AMR-NB Bit rate: 12.2 kbps	9400 1880 MHz	N/A	ANT 1	z (Axial)	-6.28	-28.31	-48.88	1.76	36.99	T4	3.8, -0.4, 3.7	7 - 9
				y (Transversal)	-11.84	-25.15	-48.02		30.64	T4	3.3, -13.3, 3.7	
W-CDMA BIV AMR-NB Bit rate: 12.2 kbps	1413 1732.6 MHz	N/A	ANT 1	z (Axial)	-3.97	-23.41	-48.78	2.00	38.19	T4	3.8, -0.4, 3.7	10 - 12
				y (Transversal)	-9.80	-25.74	-48.01		32.69	T4	3.3, -13.3, 3.7	
W-CDMA BV AMR-NB Bit rate: 12.2 kbps	4183 836.6 MHz	N/A	ANT 1	z (Axial)	-3.98	-23.86	-48.78	2.00	38.30	T4	3.8, -0.4, 3.7	13 - 15
				y (Transversal)	-10.50	-25.96	-48.01		32.43	T4	2.5, -12.9, 3.7	
CDMA2000 BC0 RC1 / SO68 Full Fr Voice Coder: 8K EVRC Low	384 836.52 MHz	N/A	ANT 2	z (Axial)	4.05	-26.20	-49.84	1.88	45.28	T4	8.3, -12.1, 3.7	16 - 18
				y (Transversal)	-3.45	-29.11	-49.85		39.76	T4	8.3, -17.1, 3.7	
CDMA2000 BC1 RC1 / SO68 Full Fr Voice Coder: 8K EVRC Low	600 1880 MHz	N/A	ANT 2	z (Axial)	4.45	-24.48	-49.84	1.56	42.96	T4	8.3, -11.7, 3.7	19 - 21
				y (Transversal)	-3.35	-26.35	-49.85		39.97	T4	8.8, -17.1, 3.7	
CDMA2000 BC10 RC1 / SO68 Full Fr Voice Coder: 8K EVRC Low	560 820 MHz	N/A	ANT 2	z (Axial)	3.78	-25.95	-49.84	1.93	44.46	T4	8.3, -10.4, 3.7	22 - 24
				y (Transversal)	-3.73	-28.39	-49.85		39.02	T4	8.8, -17.5, 3.7	

VoLTE:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	RB Allocation		Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
LTE Band 7 64QAM EVS Bit rate: 9.6 kbps	21350 2560 MHz	20 MHz	1	99	ANT 2	z (Axial)	4.75	-33.79	-51.43	0.76	38.54	T4	8.4, -10.5, 3.7	25 - 27
						y (Transversal)	-2.68	-37.83	-51.57		35.15	T4	8.6, -16.9, 3.7	
LTE Band 12 64QAM EVS Bit rate: 9.6 kbps	23130 711 MHz	10 MHz	1	49	ANT 2	z (Axial)	4.93	-37.50	-51.43	1.48	42.43	T4	8.4, -10.5, 3.7	28 - 30
						y (Transversal)	-3.05	-39.76	-51.57		36.71	T4	8.6, -16.9, 3.7	
LTE Band 25 64QAM EVS Bit rate: 9.6 kbps	26590 1905 MHz	20 MHz	1	99	ANT 2	z (Axial)	4.60	-27.33	-51.43	1.30	31.93	T4	8.2, -11.5, 3.7	31 - 33
						y (Transversal)	-4.82	-38.01	-51.57		33.19	T4	9.4, -4.8, 3.7	
LTE Band 26 64QAM EVS Bit rate: 9.6 kbps	26965 841.5 MHz	15 MHz	1	74	ANT 2	z (Axial)	4.41	-23.84	-51.43	1.29	41.51	T4	8.3, -10.4, 3.7	34 - 36
						y (Transversal)	-2.38	-27.23	-51.57		37.13	T4	8.8, -17.1, 3.7	
LTE Band 30 64QAM EVS Bit rate: 9.6 kbps	27710 2310 MHz	10 MHz	1	49	ANT 2	z (Axial)	5.09	-34.27	-51.43	1.11	39.36	T4	8.4, -10.5, 3.7	37 - 39
						y (Transversal)	-2.92	-37.63	-51.57		34.72	T4	8.6, -16.9, 3.7	
LTE Band 41 QPSK AMR-NB Bit rate: 7.4 kbps	40620 2593 MHz	20 MHz	1	49	ANT 3	z (Axial)	4.64	-13.84	-51.43	2.00	33.07	T4	7.9, -11.7, 3.7	40 - 42
						y (Transversal)	-3.79	-14.33	-51.57		31.26	T4	7.5, -16.3, 3.7	
LTE Band 48 QPSK AMR-NB Bit rate: 7.4 kbps	55990 3625 MHz	20 MHz	1	49	ANT 3	z (Axial)	5.37	-30.53	-51.43	2.00	35.90	T4	8.4, -10.5, 3.7	43 - 45
						y (Transversal)	-2.39	-37.97	-51.57		35.58	T4	8.6, -16.9, 3.7	
LTE Band 66 64QAM EVS Bit rate: 9.6 kbps	132572 1770 MHz	20 MHz	1	99	ANT 2	z (Axial)	4.75	-37.94	-51.43	1.07	42.68	T4	8.4, -10.5, 3.7	46 - 48
						y (Transversal)	-3.15	-38.40	-51.57		35.25	T4	8.6, -16.9, 3.7	

VoWi-Fi:

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABMSNR (dB)	T-Rating	Location	Plot Page #
802.11b AMR-NB Bit rate: 7.4 kbps	6 2437 MHz	20 MHz (CCK 1 Mbps)	ANT4	z (Axial)	8.20	-33.27	-51.53	2.00	41.47	T4	9.9, -10.8, 3.7	49 - 51
				y (Transversal)	-0.83	-34.32	-51.55		33.49	T4	8.6, -16.5, 3.7	
802.11ax 80 MHz EVS Bit rate: 9.6 kbps	42 5210 MHz	80 MHz (MCS9 408.3 Mbps)	ANT6	z (Axial)	2.99	-31.86	-51.55	0.66	34.85	T4	8.3, -9.3, 3.7	52 - 54
				y (Transversal)	-6.02	-46.85	-51.58		40.83	T4	9.2, 0.7, 3.7	
	58 5290 MHz	80 MHz (MCS9 408.3 Mbps)	ANT6	z (Axial)	2.85	-33.82	-51.55	1.34	45.29	T4	8.8, -12.1, 3.7	55 - 57
				y (Transversal)	-5.99	-33.38	-51.58		41.00	T4	9.6, 0, 3.7	
	106 5530 MHz	80 MHz (MCS9 408.3 Mbps)	ANT6	z (Axial)	2.19	-34.24	-51.55	0.80	45.76	T4	8.3, -10, 3.7	58 - 60
				y (Transversal)	-5.51	-33.74	-51.58		40.85	T4	10, -2.5, 3.7	
	155 5775 MHz	80 MHz (MCS9 408.3 Mbps)	ANT6	z (Axial)	2.57	-33.71	-51.55	1.28	45.97	T4	8.3, -12.1, 3.7	61 - 63
				y (Transversal)	-5.72	-33.13	-51.58		40.86	T4	9.2, -2.1, 3.7	

Note:

The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

10.2. OTT Application

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Antenna	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Ambient Noise dB(A/m)	Freq. Response (dB)	ABM SNR (dB)	T-Rating	Location	Plot Page #
GSM850 EDGE/EGPRS 2 Slots 20 kbps	190 836.6 MHz	N/A	ANT2	z (Axial)	-1.03	-10.37	-51.81	0.76	33.30	T4	5, -10, 3, 7	1 - 3
				y (Transversal)	-8.36	-12.29	-51.77		31.34	T4	4.2, -16.7, 3, 7	
GSM1900 EDGE/EGPRS 2 Slots 20 kbps	661 1880.0 MHz	N/A	ANT4	z (Axial)	4.45	-15.28	-49.88	1.19	34.52	T4	7.9, -11.3, 3, 7	4 - 6
				y (Transversal)	-7.35	-18.71	-49.84		32.45	T4	8.8, -14.2, 3, 7	
W-CDMA BII HSPA 28 kbps	9400 1880 MHz	N/A	ANT4	z (Axial)	2.54	-24.15	-48.62	1.45	37.68	T4	7.9, -10.4, 3, 7	7 - 9
				y (Transversal)	-7.05	-26.29	-47.73		33.05	T4	8.8, -2.9, 3, 7	
W-CDMA BIV HSPA 28 kbps	1413 1732.6 MHz	N/A	ANT4	z (Axial)	4.63	-28.31	-51.57	1.35	40.27	T4	10.8, -10.4, 3, 7	10 - 12
				y (Transversal)	-3.84	-29.85	-51.49		36.88	T4	8.8, -17.1, 3, 7	
W-CDMA BV HSPA 28 kbps	4183 836.6 MHz	N/A	ANT2	z (Axial)	4.64	-28.83	-51.56	1.41	40.38	T4	10.8, -11.3, 3, 7	13 - 15
				y (Transversal)	-3.96	-29.52	-51.55		37.01	T4	8.8, -17.1, 3, 7	
CDMA BC0 Rel. 0 28 kbps	384 836.52 MHz	N/A	ANT2	z (Axial)	4.95	-27.16	-51.69	1.48	40.31	T4	11.3, -12.1, 3, 7	16 - 18
				y (Transversal)	-5.06	-28.64	-51.60		36.82	T4	12.1, -3.8, 3, 7	
CDMA BC1 Rel. 0 28 kbps	600 1880.00 MHz	N/A	ANT 2	z (Axial)	0.53	-24.91	-48.62	1.30	36.21	T4	7.9, -12.5, 3, 7	19 - 21
				y (Transversal)	-8.47	-27.45	-47.73		33.44	T4	8.3, -3.8, 3, 7	
CDMA BC10 Rel. 0 28 kbps	560 820.00 MHz	N/A	ANT2	z (Axial)	5.14	-27.05	-51.69	1.39	40.45	T4	11.3, -12.1, 3, 7	22 - 24
				y (Transversal)	-5.00	-27.37	-51.60		37.19	T4	12.1, -3.8, 3, 7	
LTE Band 7 64QAM RB 1/99 28 kbps	21350 2560 MHz	20 MHz	ANT3	z (Axial)	5.87	-30.29	-51.59	1.35	36.16	T4	10.2, -12, 3, 7	25 - 27
				y (Transversal)	-3.36	-37.31	-51.52		33.95	T4	8.5, -17.1, 3, 7	
LTE Band 12 64QAM RB 1/49 28 kbps	23130 711 MHz	10 MHz	ANT1	z (Axial)	5.76	-32.92	-51.59	1.35	38.68	T4	10.2, -12, 3, 7	28 - 30
				y (Transversal)	-3.27	-38.96	-51.52		35.69	T4	8.5, -17.1, 3, 7	
LTE Band 25 64QAM RB 1/99 28 kbps	26590 1905 MHz	20 MHz	ANT3	z (Axial)	5.80	-26.70	-51.59	1.49	32.50	T4	10.2, -12, 3, 7	31 - 33
				y (Transversal)	-3.55	-34.13	-51.52		30.58	T4	8.5, -17.1, 3, 7	
LTE Band 26 64QAM RB 1/74 28 kbps	26965 841.5 MHz	15 MHz	ANT1	z (Axial)	4.71	-24.40	-51.59	1.47	38.64	T4	10, -12.1, 3, 7	34 - 36
				y (Transversal)	-3.51	-23.50	-51.52		36.03	T4	8.3, -17.1, 3, 7	
LTE Band 30 64QAM RB 1/49 28 kbps	27710 2310 MHz	10 MHz	ANT3	z (Axial)	5.86	-32.14	-51.59	1.35	38.00	T4	10.2, -12, 3, 7	37 - 39
				y (Transversal)	-3.31	-38.53	-51.52		35.22	T4	8.5, -17.1, 3, 7	
LTE Band 41 QPSK RB 1/49 28 kbps	40620 2593 MHz	20 MHz	ANT1	z (Axial)	4.09	-16.24	-51.59	1.48	33.26	T4	8.8, -12.1, 3, 7	40 - 42
				y (Transversal)	-4.17	-18.02	-51.52		34.60	T4	7.9, -17.1, 3, 7	
LTE Band 48 QPSK RB 1/49 28 kbps	55990 3625 MHz	20 MHz	ANT1	z (Axial)	4.67	-30.69	-51.59	1.49	35.35	T4	8.6, -12.2, 3, 7	43 - 45
				y (Transversal)	-3.66	-38.48	-51.52		34.83	T4	8.1, -17, 3, 7	
LTE Band 66 64QAM RB 1/99 28 kbps	132572 1770 MHz	20 MHz	ANT3	z (Axial)	5.79	-30.24	-51.59	1.41	36.03	T4	10.2, -12, 3, 7	46 - 48
				y (Transversal)	-3.48	-36.98	-51.52		33.50	T4	8.5, -17.1, 3, 7	
802.11b Bit rate: 48 kbps	6 2437 MHz	20 MHz (CCK 1 Mbps)	ANT3	z (Axial)	7.57	-33.36	-51.57	1.26	40.92	T4	11.1, -11.8, 3, 7	49 - 51
				y (Transversal)	-3.47	-40.37	-51.51		36.90	T4	9.3, -17.1, 3, 7	
802.11ax 80 MHz Bit rate: 48 kbps	42 5210 MHz	80 MHz (MCS9 408.3 Mbps)	ANT5	z (Axial)	4.67	-28.50	-51.57	0.95	40.21	T4	7.9, -10.8, 3, 7	52 - 54
				y (Transversal)	-4.58	-30.25	-51.51		37.35	T4	12.5, -3.3, 3, 7	
	58 5290 MHz	80 MHz (MCS9 408.3 Mbps)	ANT5	z (Axial)	4.25	-35.81	-51.57	1.02	40.07	T4	8.1, -11, 3, 7	55 - 57
				y (Transversal)	-5.26	-42.05	-51.51		36.78	T4	12.7, -3.2, 3, 7	
	106 5530 MHz	80 MHz (MCS9 408.3 Mbps)	ANT5	z (Axial)	4.88	-35.22	-51.57	1.07	40.09	T4	8.1, -11, 3, 7	58 - 60
				y (Transversal)	-5.14	-42.06	-51.51		36.92	T4	12.7, -3.2, 3, 7	
	155 5775 MHz	80 MHz (MCS9 408.3 Mbps)	ANT5	z (Axial)	4.94	-34.98	-51.57	0.99	39.91	T4	8.1, -11, 3, 7	61 - 63
				y (Transversal)	-5.07	-42.06	-51.51		36.99	T4	12.7, -3.2, 3, 7	

Note:
The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19

10.3. Worst Case T-Coil Test Plot

Test Laboratory: UL Verification Services Inc. SAR Lab 8

Date: 7/12/2019

LTE Band 25

Communication System: UID 0, @LTE (FDD) (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2019
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1540; Calibrated: 2/18/2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 25 64QAM Ch. 26590 RB 1/99 20 MHz BW_ANT 3/y (transversal) Single Point/ABM SNR(x,y,z) (1x1x1): Measurement

grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 37.18

Measure Window Start: 500ms

Measure Window Length: 2000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1/ABM2 = 30.58 dB


ABM1 comp = -3.55 dBA/m

BWC Factor = 0.16 dB

Location: 8.5, -17.1, 3.7 mm

ABM2 = -34.13 dBA/m

Location: 8.5, -17.1, 3.7 mm

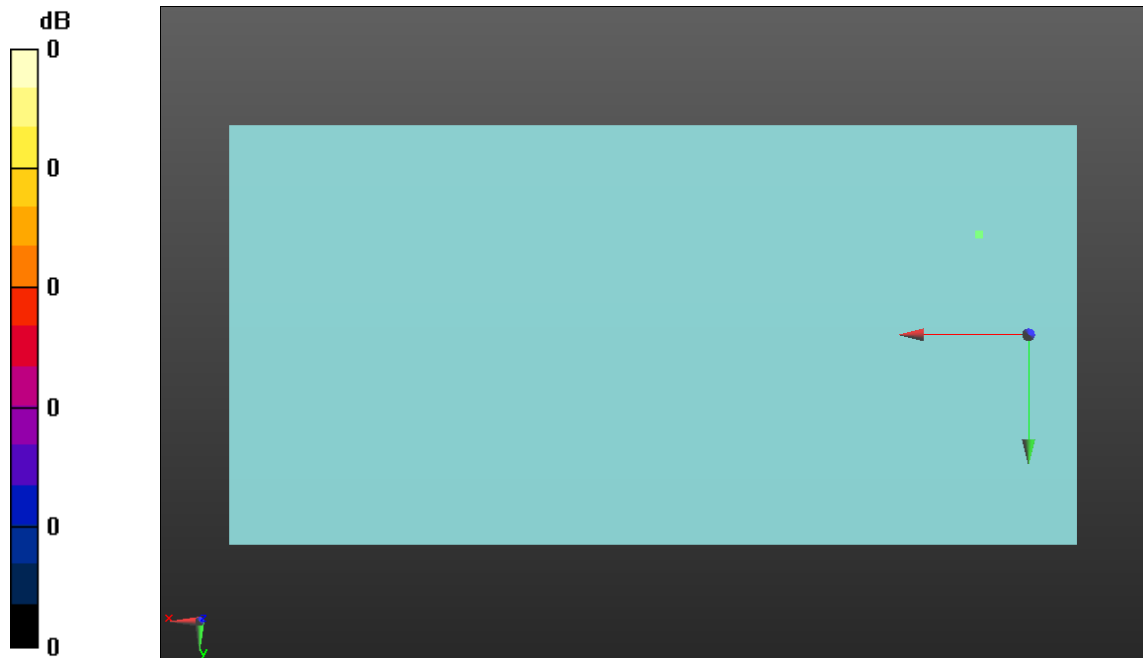

0 dB = 1.000 = 0.00 dB

Appendix

Refer to separated files for the following appendixes

Appendix A: T-Coil Setup Photo

Appendix B: T-Coil Test Plots

Appendix C: T-Coil Test Plots (OTT)

Appendix D: T-Coil Probe Certificates

Appendix E: Adjusted Gain Procedure

END OF REPORT