



CERTIFICATION TEST REPORT

Report Number. : 12607353-E2V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2215

FCC ID : BCG-E3307A

IC : 579C-E3307A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:

AUGUST 09, 2019

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	8/7/2019	Initial Issue	Chris Xiong
V2	8/9/2019	Addressed TCB Questions on Sections 2, 5.5, 5.6, 6, 9	Chris Xiong

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. SOFTWARE AND FIRMWARE.....	10
5.5. WORST-CASE CONFIGURATION AND MODE	10
5.6. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	16
7. MEASUREMENT METHODS	17
8. ANTENNA PORT TEST RESULTS	18
8.1. ON TIME AND DUTY CYCLE	18
8.2. 20 dB AND 99% BANDWIDTH	20
8.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	21
8.2.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	23
8.2.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	25
8.2.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	27
8.3. BEAMFORMING 20 dB AND 99% BANDWIDTH.....	29
8.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	29
8.3.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	31
8.3.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	33
8.3.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	35
8.4. HOPPING FREQUENCY SEPARATION	37
8.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION	38
8.4.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	39
8.4.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	40
8.4.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	41
8.5. BEAMFORMING HOPPING FREQUENCY SEPARATION.....	42

8.5.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	43
8.5.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	44
8.5.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	45
8.5.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	46
8.6.	NUMBER OF HOPPING CHANNELS.....	47
8.6.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	48
8.6.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	50
8.6.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	52
8.6.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	54
8.7.	BEAMFORMING NUMBER OF HOPPING CHANNELS	56
8.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	57
8.7.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	59
8.7.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	61
8.7.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	63
8.8.	AVERAGE TIME OF OCCUPANCY.....	65
8.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	66
8.8.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	70
8.8.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	74
8.8.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	78
8.9.	BEAMFORMING AVERAGE TIME OF OCCUPANCY	82
8.9.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	83
8.9.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	87
8.9.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	91
8.9.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	95
8.10.	OUTPUT POWER	99
8.10.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	100
8.10.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	101
8.10.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	102
8.10.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	103
8.10.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	104
8.10.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	105
8.11.	BEAMFORMING OUTPUT POWER	106
8.11.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	106
8.11.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION.....	106
8.11.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	106
8.11.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	107
8.11.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	107
8.11.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	107
8.12.	AVERAGE POWER	108
8.12.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	109
8.12.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION.....	110
8.12.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	111
8.12.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	112
8.12.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	113
8.12.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	114
8.13.	BEAMFORMING AVERAGE POWER.....	115
8.13.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	115
8.13.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION.....	115
8.13.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	115

8.13.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	116
8.13.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION	116
8.13.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	116
8.14.	CONDUCTED SPURIOUS EMISSIONS	117
8.14.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	118
8.14.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	122
8.14.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	126
8.14.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	130
8.15.	BEAMFORMING CONDUCTED SPURIOUS EMISSIONS	134
8.15.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	134
8.15.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	138
8.15.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	142
8.15.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	146
9.	RADIATED TEST RESULTS	150
9.1.	TRANSMITTER ABOVE 1 GHz	152
9.1.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	152
9.1.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	172
9.1.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	192
9.1.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	212
9.2.	BEAMFORMING TRANSMITTER ABOVE 1 GHz	232
9.2.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	232
9.2.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	242
9.2.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	252
9.2.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	262
9.3.	WORST CASE BELOW 1 GHz	272
9.4.	WORST CASE 18-26 GHz	274
10.	AC POWER LINE CONDUCTED EMISSIONS	276
10.1.	AC Power Line Host	277
10.2.	AC Power Line Norm	279
11.	SETUP PHOTOS	281

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA. 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2215

SERIAL NUMBER: C39YV06EN2RW (Conducted), C39YT00YN2RK (Radiated)

DATE TESTED: MAY 03, 2019 – AUGUST 01, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.


This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Chris Xiong
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street ISED Site Code: 2324A	47266 Benicia Street ISED Site Code: XXXXX	47658 Kato Rd ISED Site Code: XXXXX
☒ Chamber A	☐ Chamber D	☐ Chamber I
☐ Chamber B	☒ Chamber E	☐ Chamber J
☐ Chamber C	☐ Chamber F	☒ Chamber K
	☒ Chamber G	☐ Chamber L
	☒ Chamber H	☐ Chamber M

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss}$$

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
Antenna 4	High Power	2402 - 2480	Basic GFSK	16.65	46.24
		2402 - 2480	DQPSK	18.47	70.31
		2402 - 2480	Enhanced 8PSK	18.54	71.45
	Low Power	2402 - 2480	Basic GFSK	12.58	18.11
		2402 - 2480	DQPSK	11.41	13.84
		2402 - 2480	Enhanced 8PSK	11.49	14.09
Antenna 3	High Power	2402 - 2480	Basic GFSK	19.57	90.57
		2402 - 2480	DQPSK	18.44	69.82
		2402 - 2480	Enhanced 8PSK	18.51	70.96
	Low Power	2402 - 2480	Basic GFSK	12.57	18.07
		2402 - 2480	DQPSK	11.39	13.77
		2402 - 2480	Enhanced 8PSK	11.44	13.93
BF, Antenna 4 + Antenna 3	High Power	2402 - 2480	Basic GFSK TxBF	19.88	97.27
		2402 - 2480	DQPSK TxBF	20.58	114.29
		2402 - 2480	Enhanced 8PSK TxBF	20.62	115.35
	Low Power	2402 - 2480	Basic GFSK TxBF	15.60	36.31
		2402 - 2480	DQPSK TxBF	14.42	27.67
		2402 - 2480	Enhanced 8PSK TxBF	14.48	28.05

Note: GFSK, DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on these modes to showing compliance. For average power data please refer to section 8.12 and 8.13.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant. 4 (Core 0) (dBi)	Ant. 3 (Core 1) (dBi)
2.4	-1.7	-1.9

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was FW Version: 17.1.140.1283.

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4 (Core 0) and ANT 3 (Core 1). It was determined that X (Flatbed) orientation was worst case on ANT4, ANT 3 and 2TX, beamforming.

Output power test results were performed with respect to Client's target power.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. Output power test results were performed with respect to Client's target power. Both transmitting antennas are set at equal or greater than the highest maximum tune up power during radiated tests.

For below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. There were no emissions found below 30MHz within 20dB of the limit. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands. No noticeable new emission was found.

Worst-case data rates as provided by the client were:

GFSK mode: DH5
8PSK mode: 3-DH5
Beamforming, GFSK, DH5
Beamforming, 8PSK, 3-DH5

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	A1502	HRP003436	QDS-BRCM1080
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D29325SM03XDHLHC9	NA

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

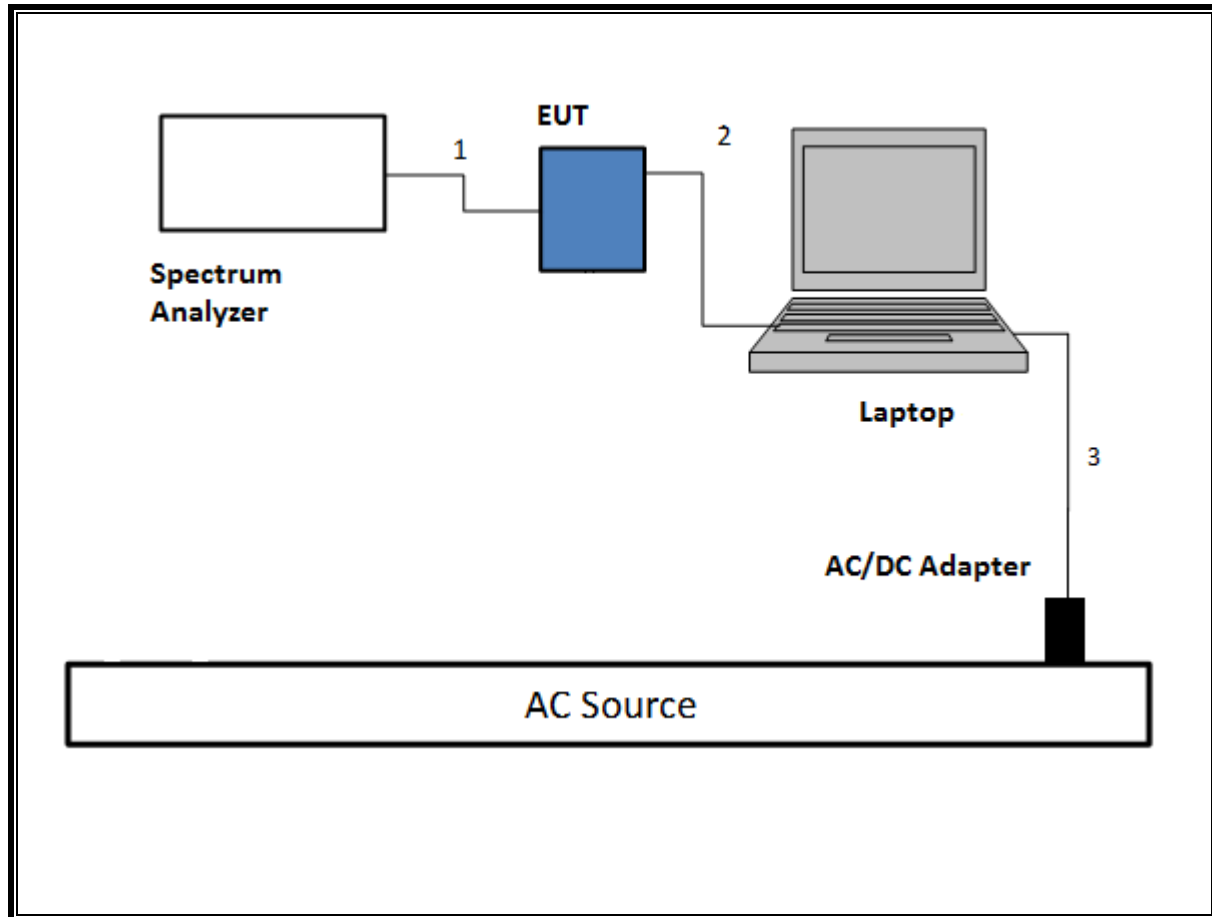


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

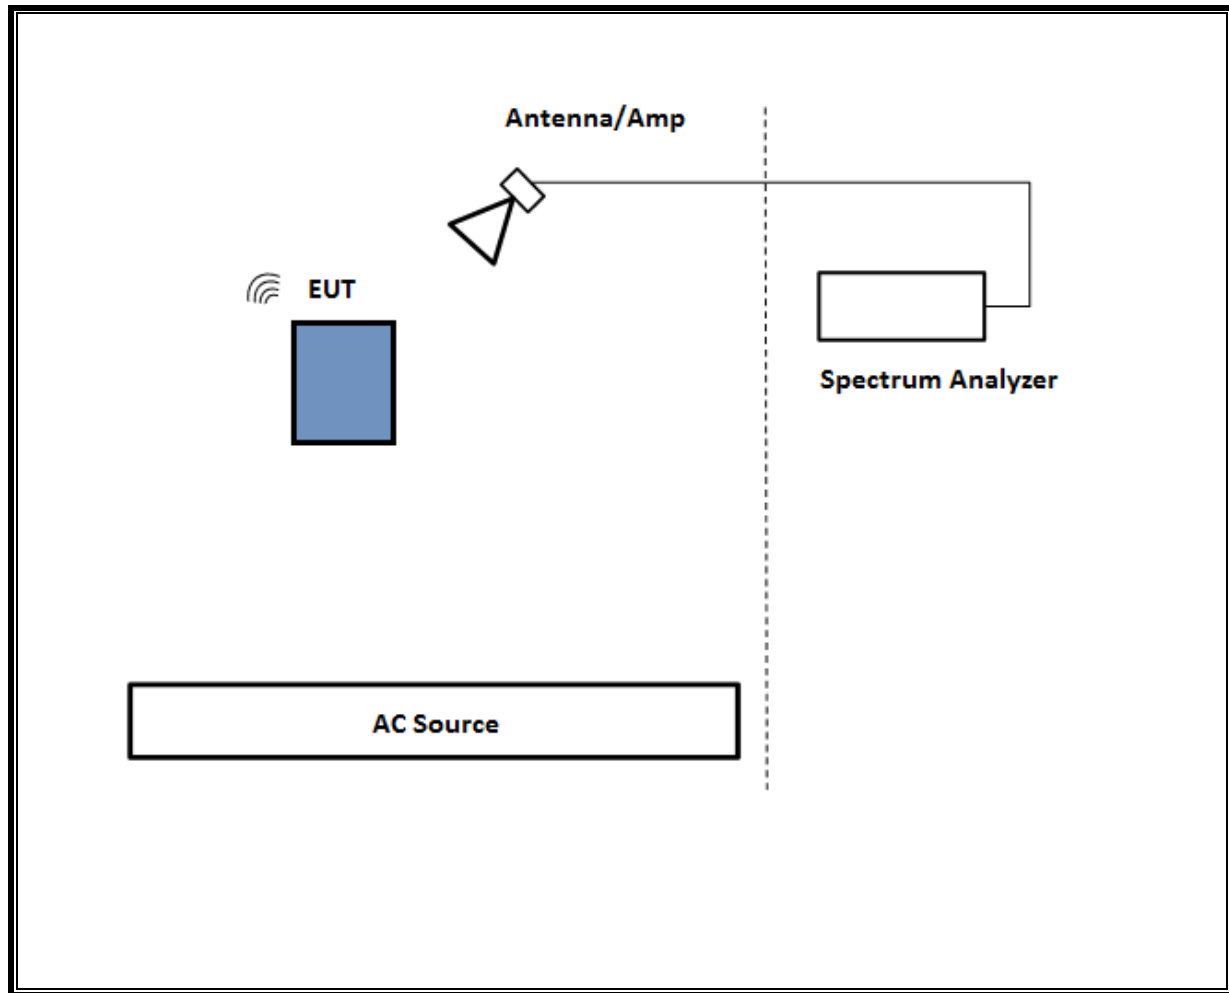

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

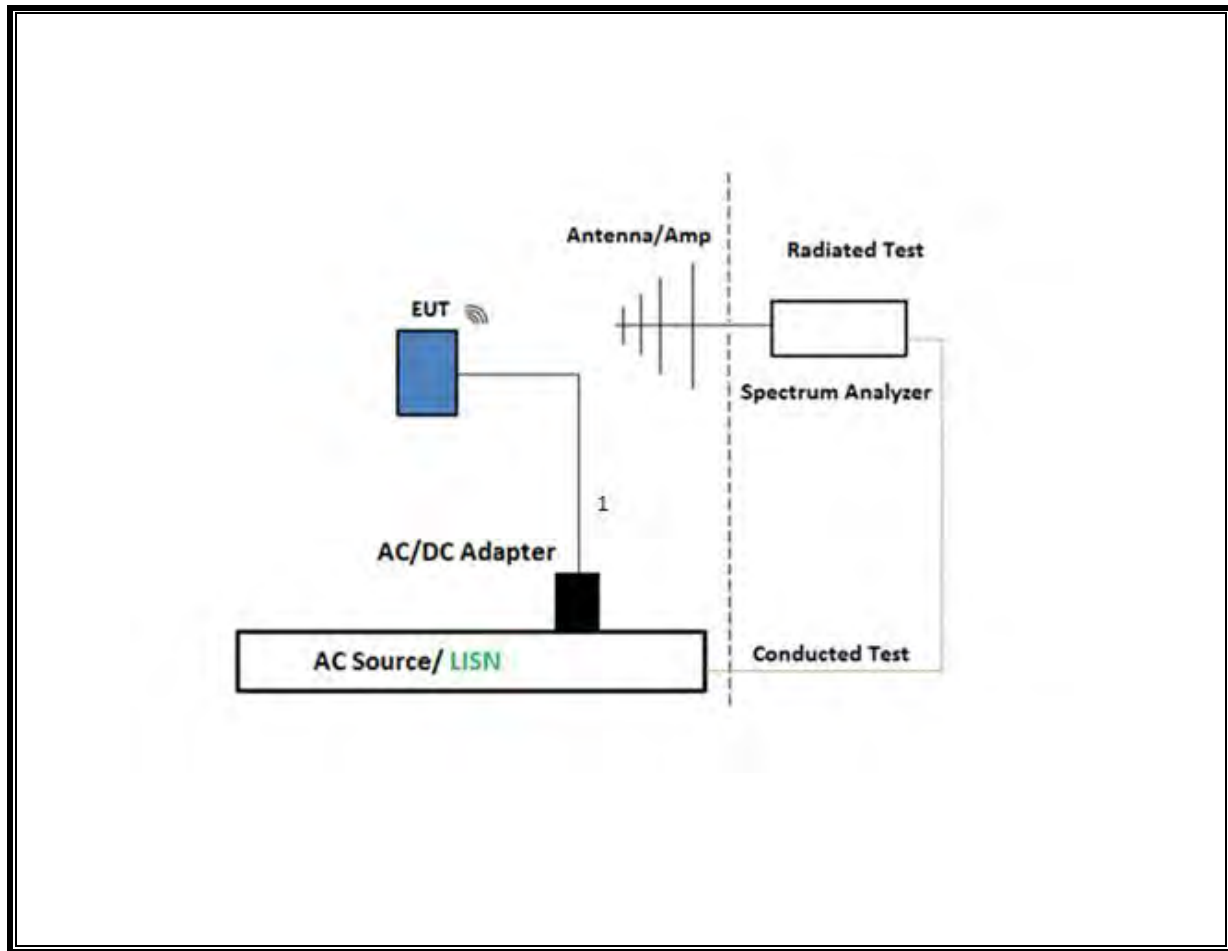

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

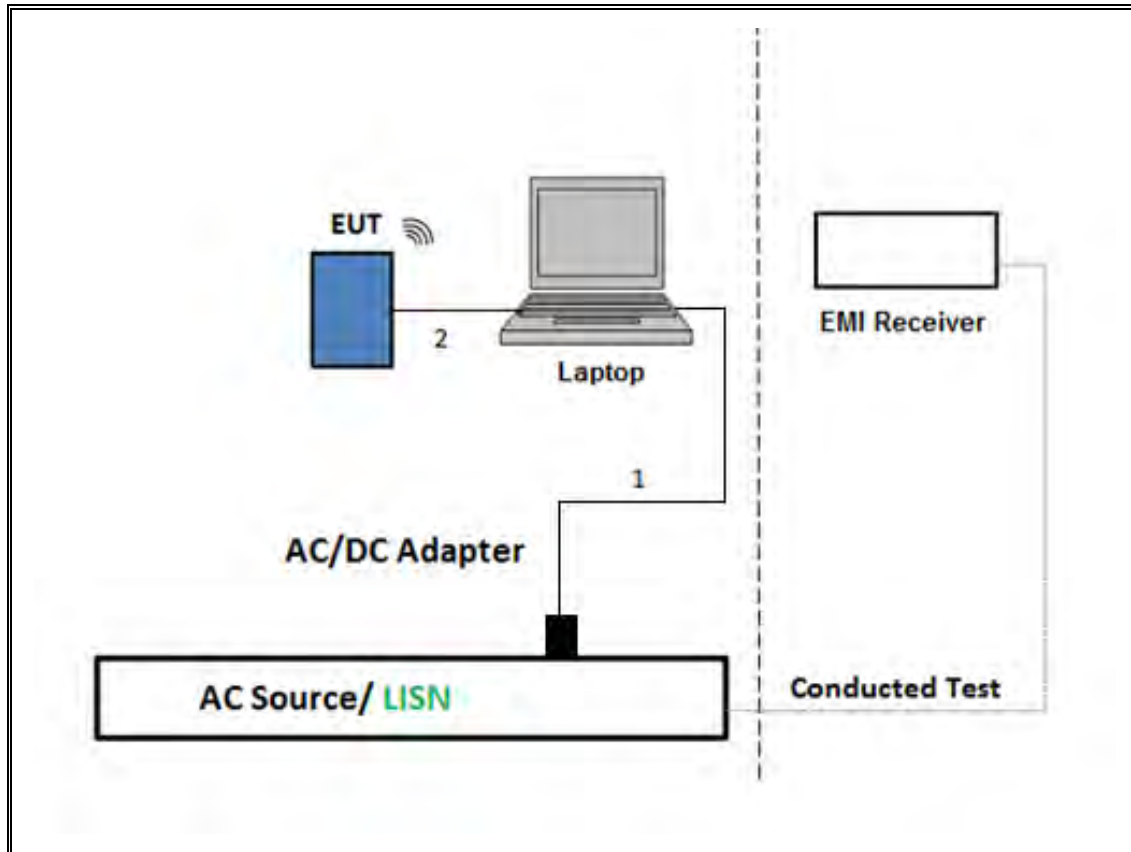

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	03/22/2020	03/22/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	10/06/2019	10/06/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	05/10/2020	05/10/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	05/30/2020	05/30/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	06/14/2020	06/14/2019
Amplifier, 1 to 18GHz, 35dB	Amplical	AFS42-00101800-25-S-42	T1567	01/26/2020	01/26/2019
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	05/30/2020	05/30/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T493	08/30/2019	08/30/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T477	07/24/2019	07/24/2018
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	07/06/2019	07/06/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T340	01/22/2020	01/22/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T1210	08/06/2019	08/06/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T342	01/23/2020	01/23/2019
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1466	01/23/2020	01/23/2019
Power Meter, P-series single channel	Keysight	N1912A	T1244	01/30/2020	01/30/2019
Power Sensor	Keysight	N1921A	T1224	02/22/2020	02/22/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T339	01/23/2020	01/23/2019
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	06/16/2019	06/16/2018
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	03/23/2020	03/23/2019
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T35	06/06/2020	06/06/2019
3GHz HPF	Micro-Tronics	HPM17542	T897	05/04/2020	05/04/2020

AC Line Conducted					
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	02/14/2020	02/14/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019	08/31/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019	06/19/2018
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016		
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015		

*Testing is completed before equipment expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3 and 6.5

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3 and 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth 8PSK	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth GFSK TxBF	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth 8PSK TxBF	1.00	1.00	1.000	100.0%	0.00	0.010

DUTY CYCLE PLOTS

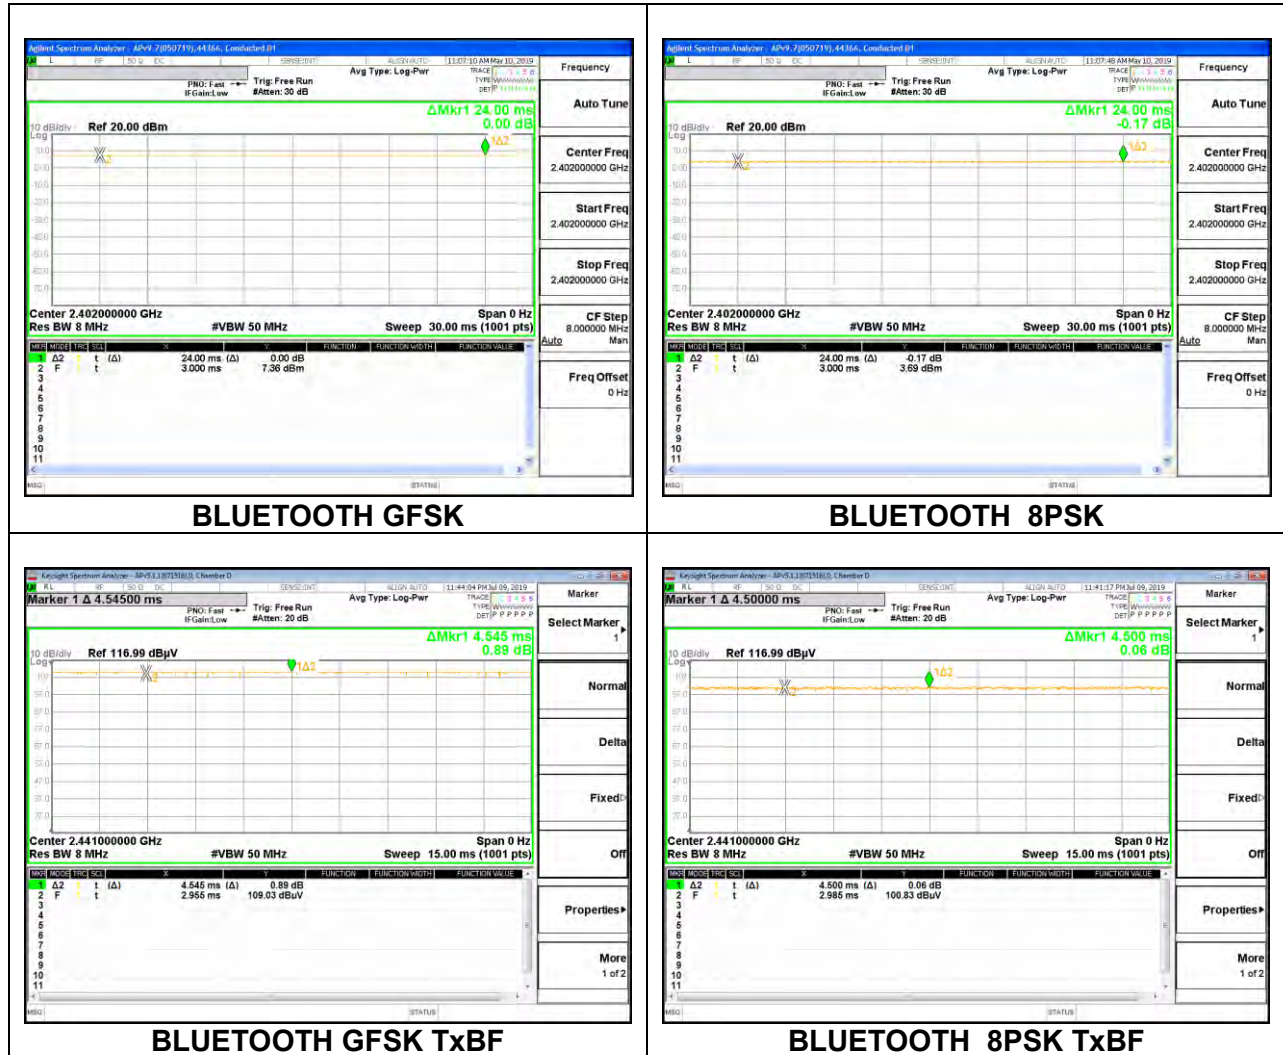

8.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

8.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.8898	0.87084
Mid	2441	0.8883	0.87014
High	2480	0.8886	0.87038

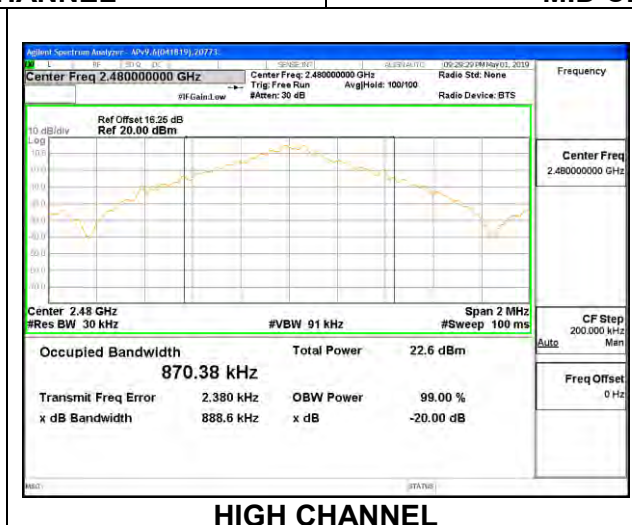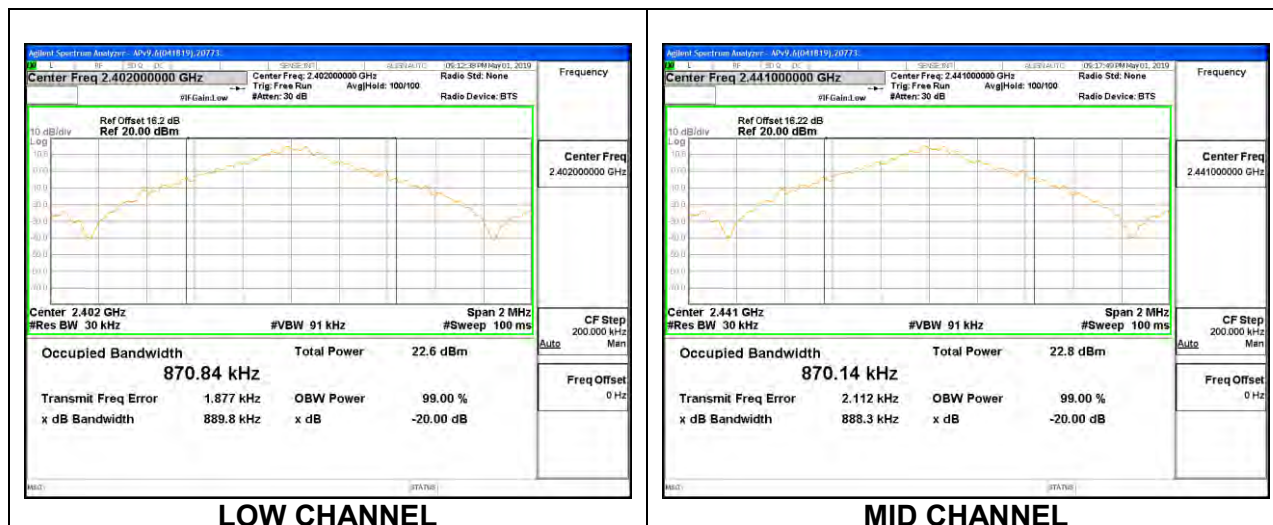

Antenna 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.8892	0.87121
Mid	2441	0.8888	0.87154
High	2480	0.8888	0.87103



8.2.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.378	1.2220
Mid	2441	1.378	1.2224
High	2480	1.380	1.2235



Antenna 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.373	1.223
Mid	2441	1.379	1.223
High	2480	1.38	1.224



8.2.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.8890	0.87298
Mid	2441	0.8885	0.87076
High	2480	0.8880	0.87053



Antenna 3




Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9239	0.87417
Mid	2441	0.9242	0.87364
High	2480	0.9243	0.87333



8.2.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.379	1.2226
Mid	2441	1.380	1.2217
High	2480	1.379	1.2231

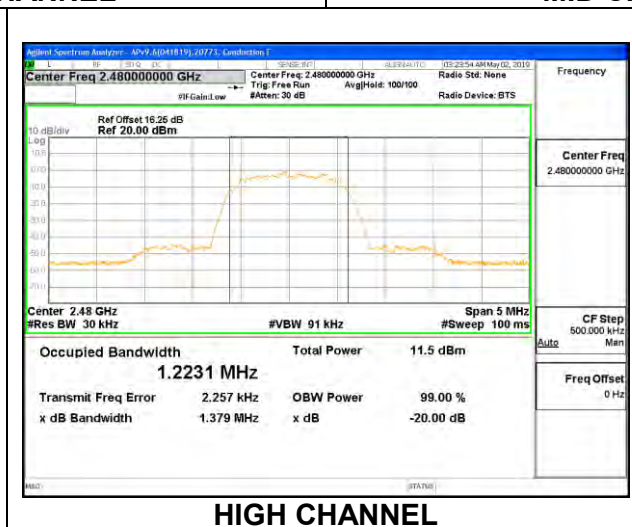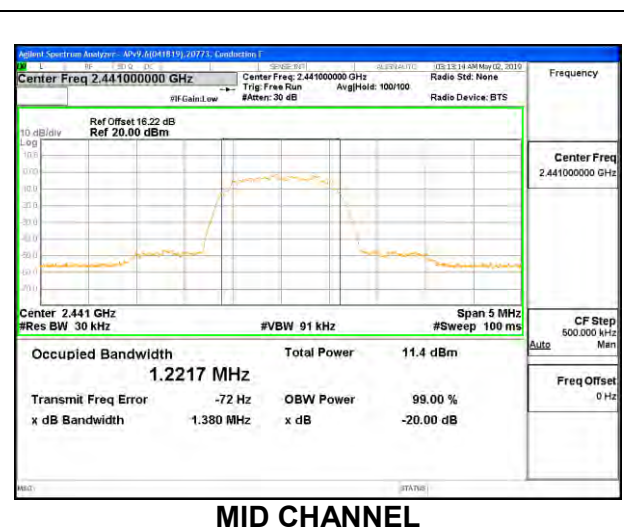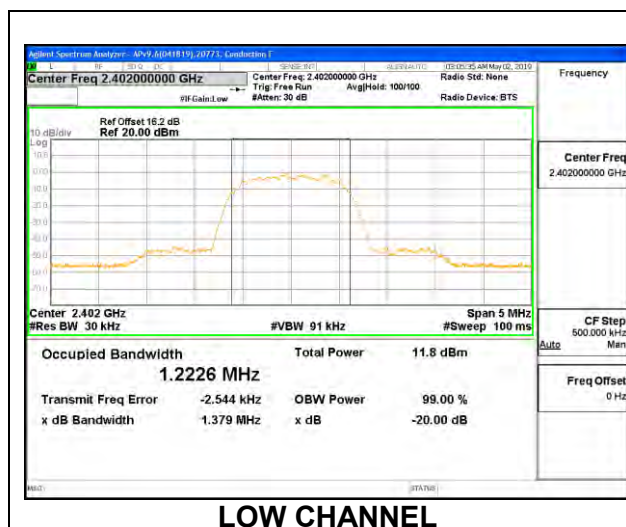

Antenna 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.381	1.2248
Mid	2441	1.380	1.2240
High	2480	1.381	1.2238







8.3. BEAMFORMING 20 dB AND 99% BANDWIDTH


Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

8.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 4 (MHz)	20dB Bandwidth Antenna 3 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low	2402	0.8891	0.87023	0.9202	0.87244
Mid	2441	0.8881	0.86944	0.8900	0.87187
High	2480	0.8887	0.86932	0.8893	0.87215

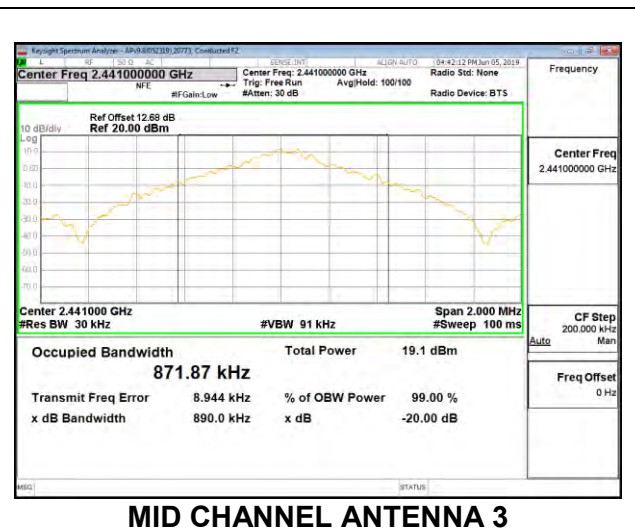
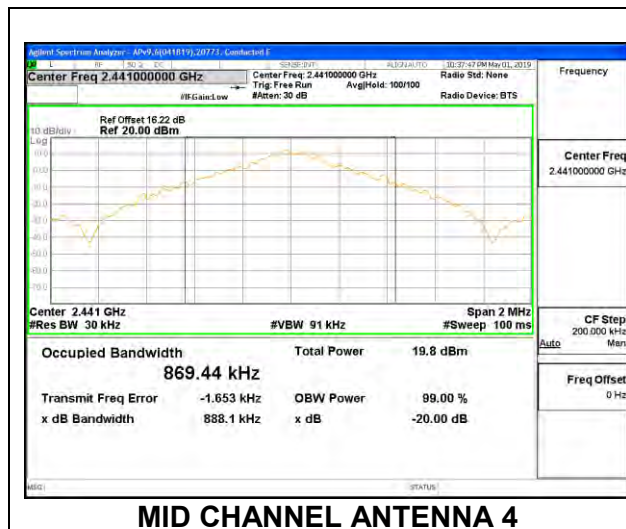
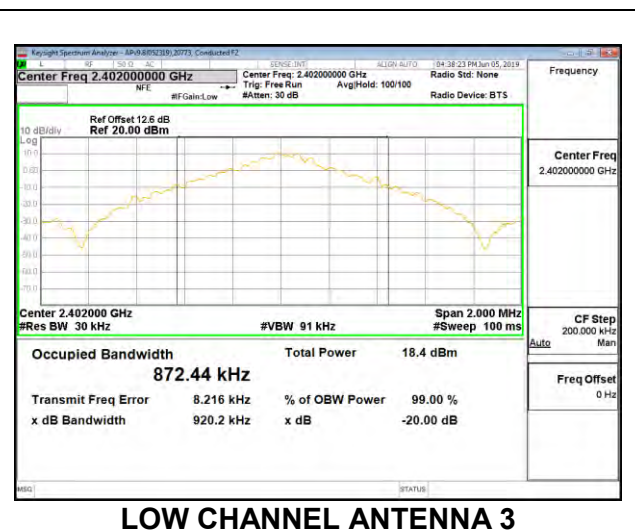
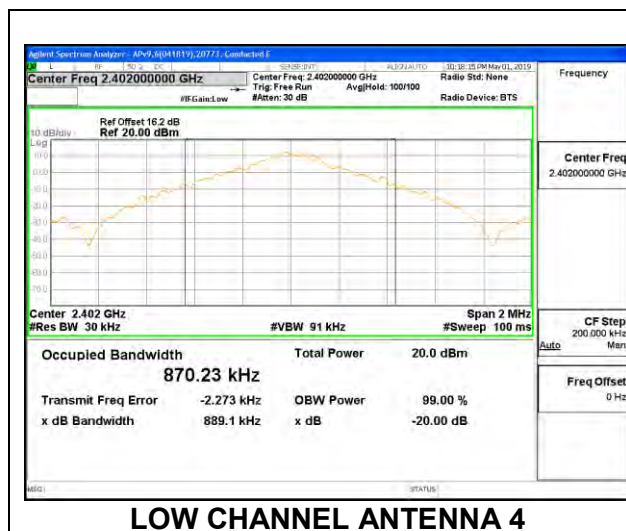


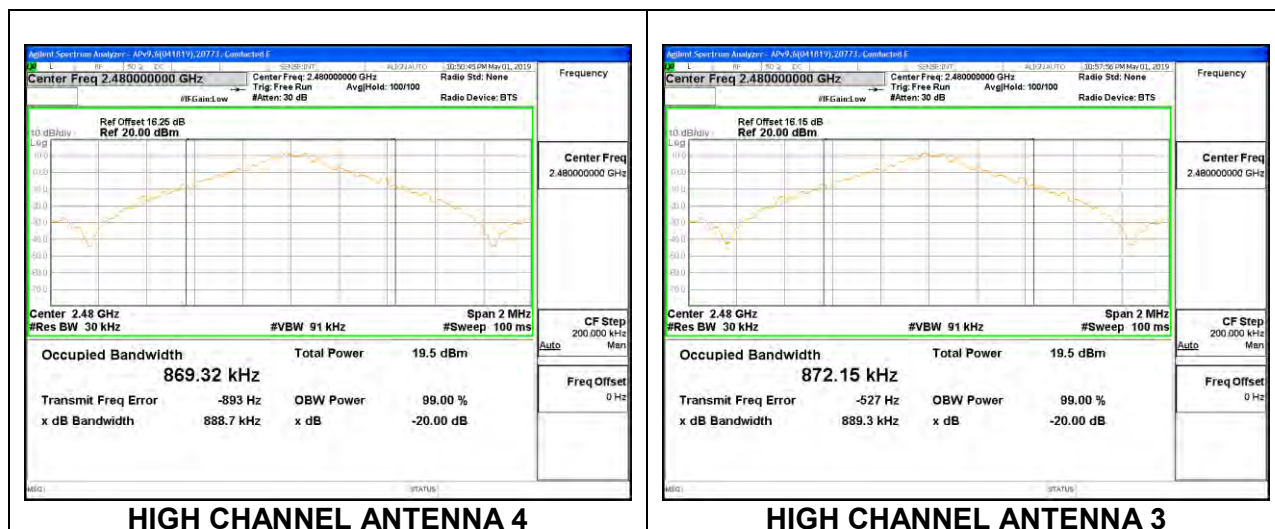


8.3.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)
Low	2402	1.378	1.2220	1.379	1.2242
Mid	2441	1.378	1.2226	1.380	1.2233
High	2480	1.378	1.2225	1.380	1.2226

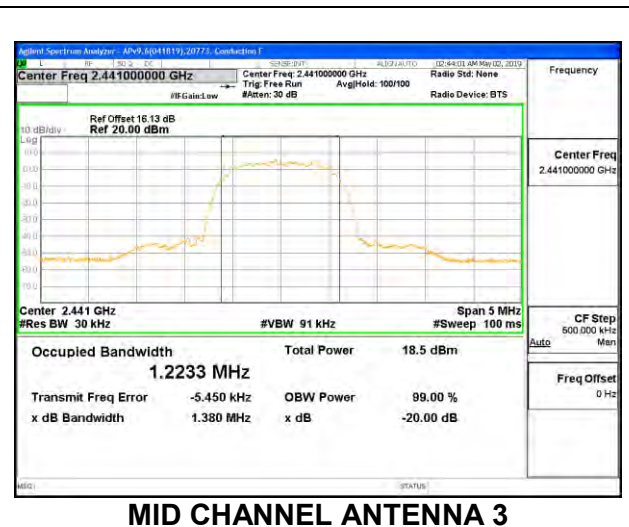
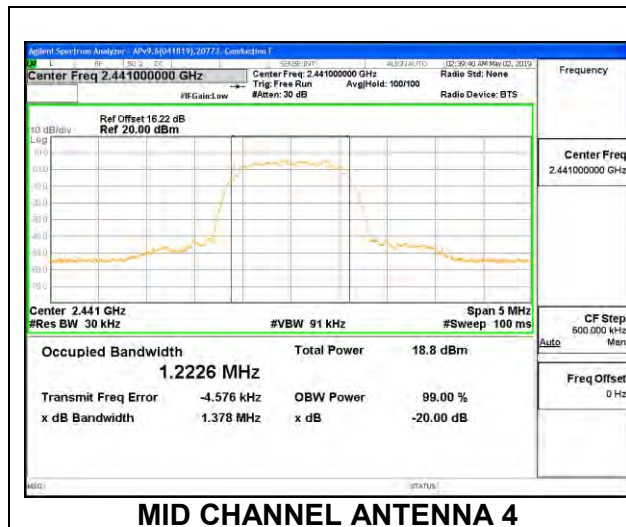
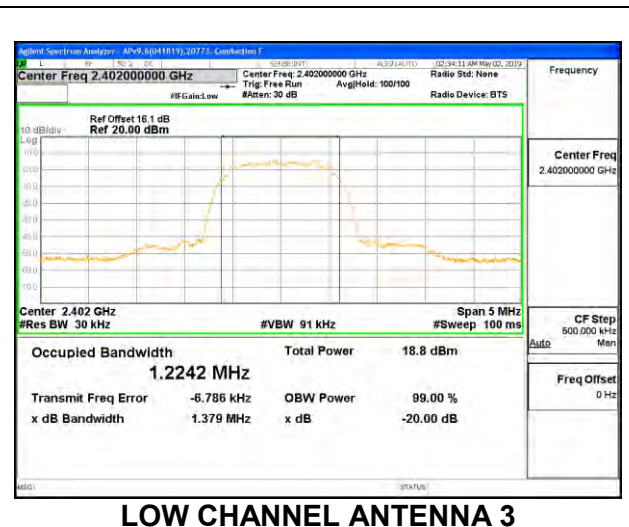
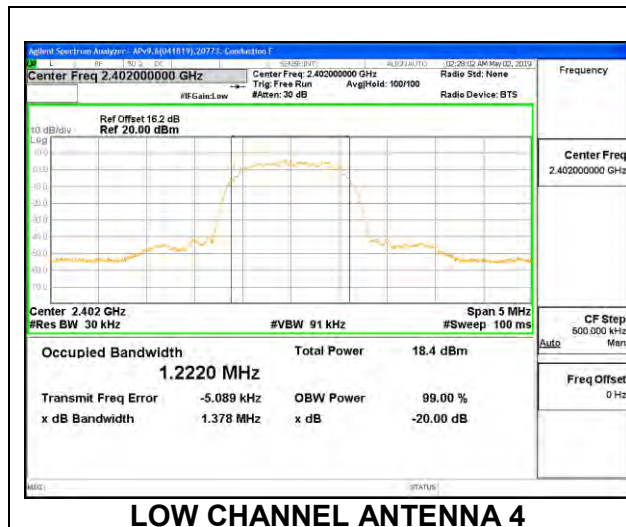


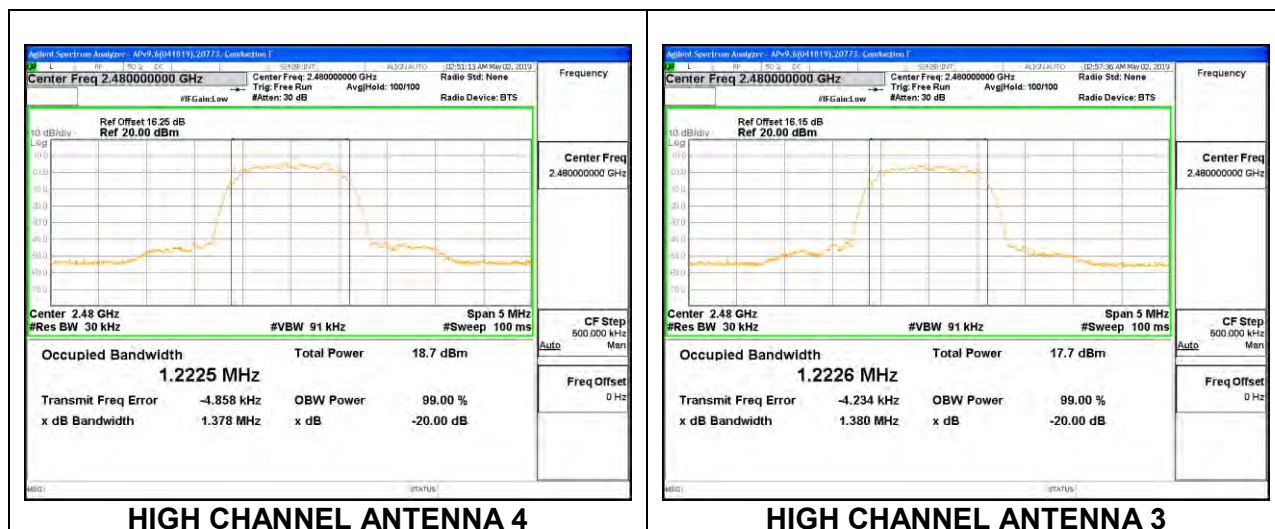


8.3.3. LOW POWER BASIC DATA RATE GFSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)
Low	2402	0.9242	0.87299	0.9247	0.87467
Mid	2441	0.8884	0.87102	0.9233	0.87364
High	2480	0.8881	0.87072	0.8896	0.87349

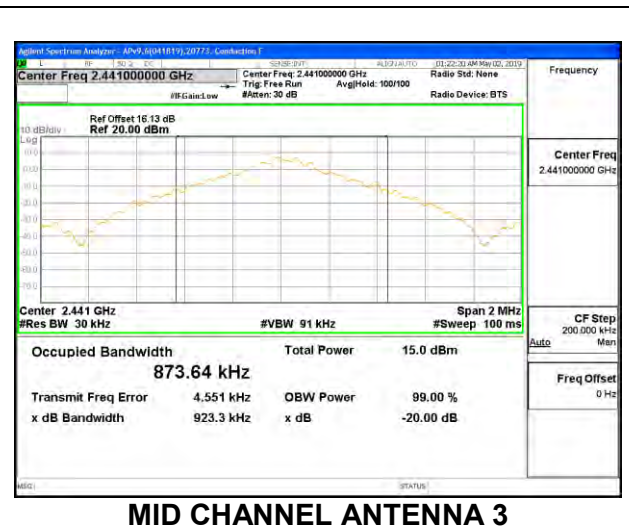
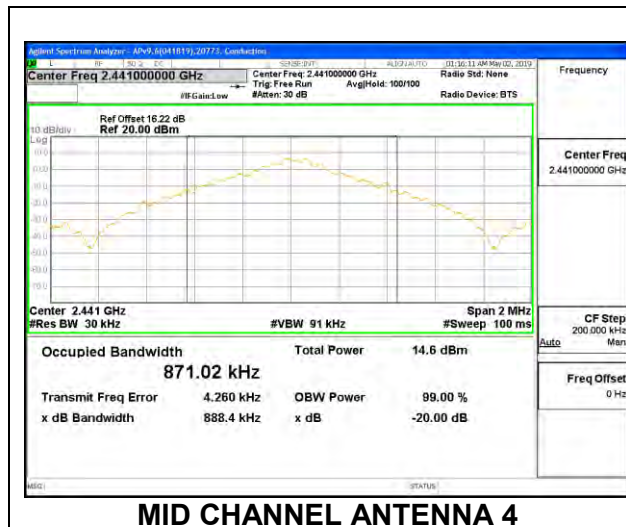
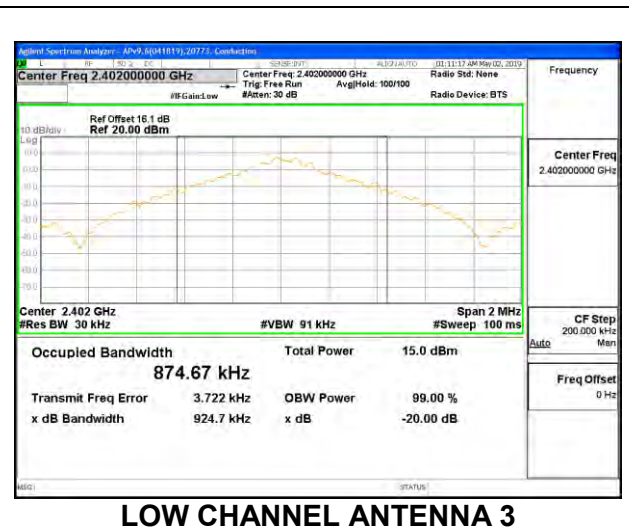
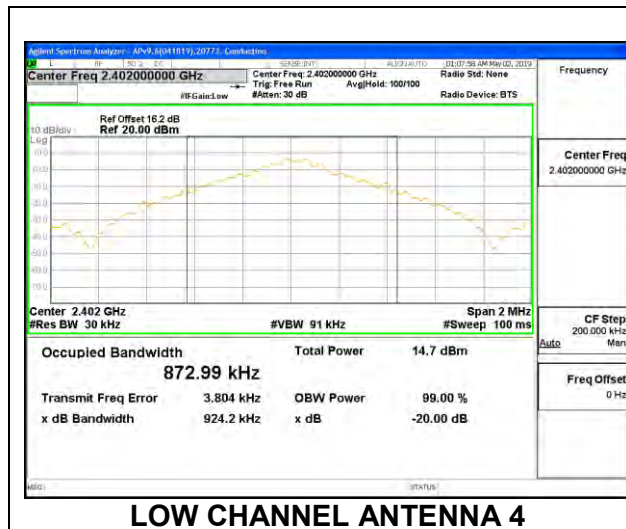


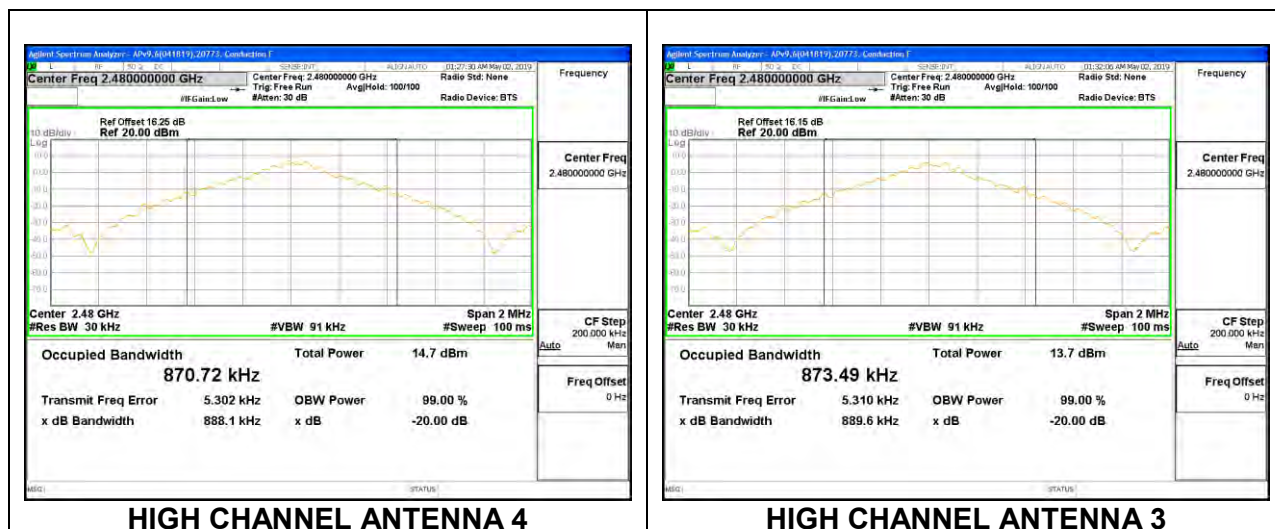


8.3.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Frequency (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)	20dB Bandwidth Antenna 2 (MHz)	99% Bandwidth Antenna 2 (MHz)
2402	1.380	1.2223	1.381	1.2249
2441	1.379	1.2219	1.381	1.2235
2480	1.379	1.2231	1.379	1.2238

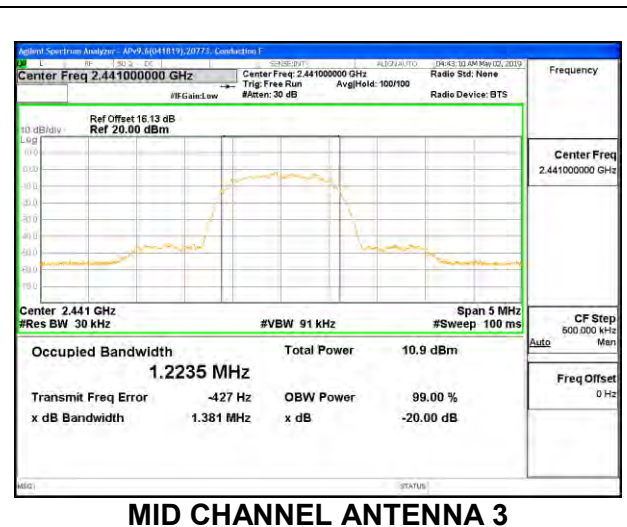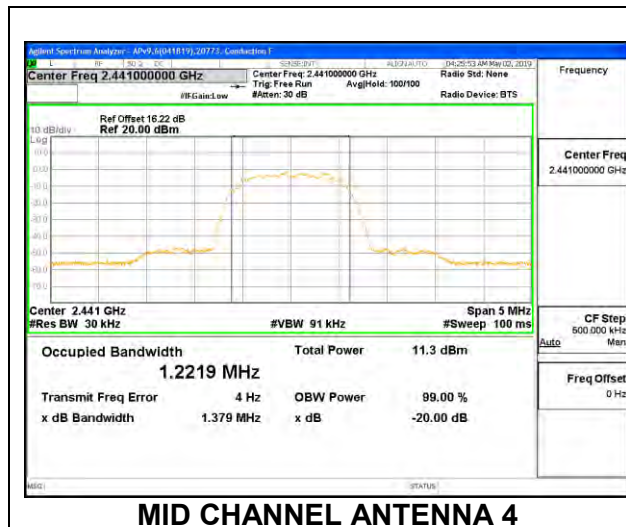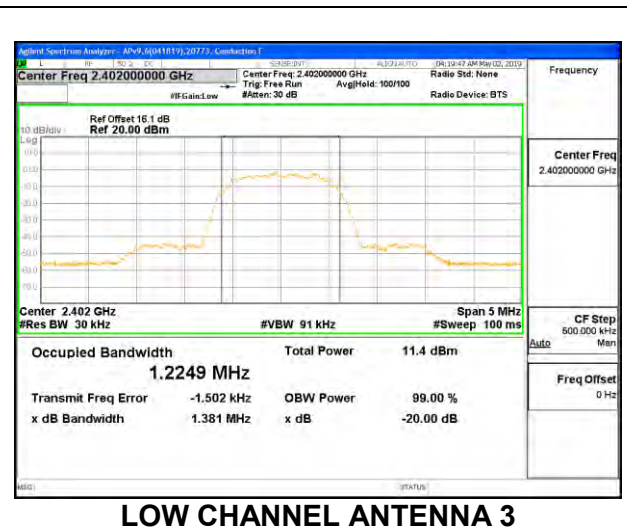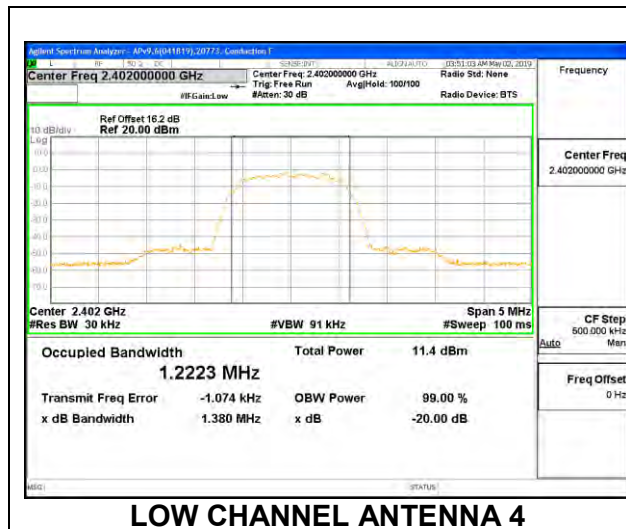

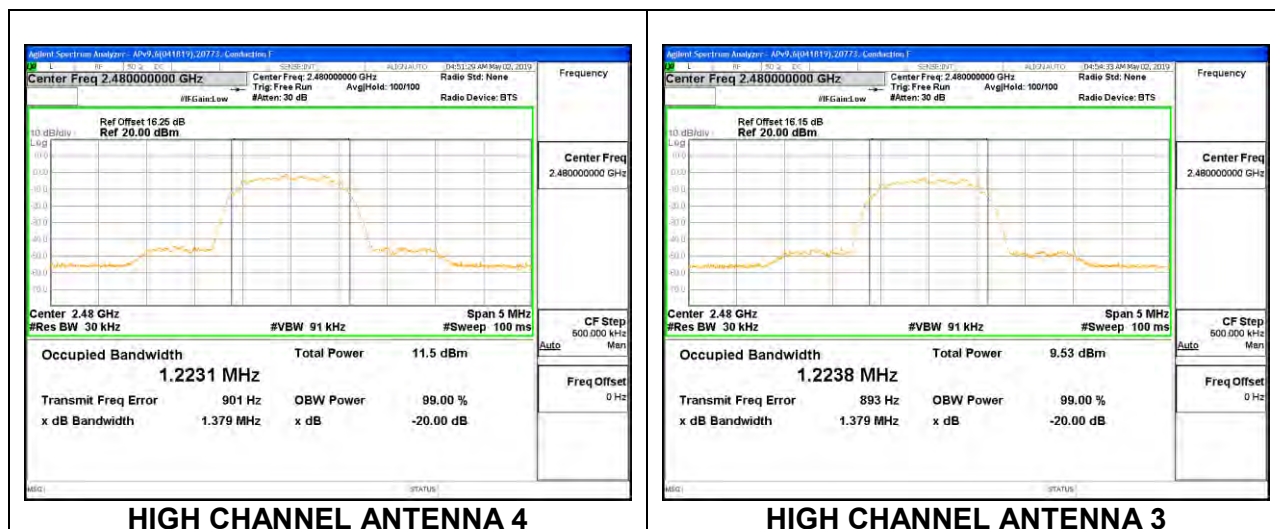

8.4. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.


RESULTS

8.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

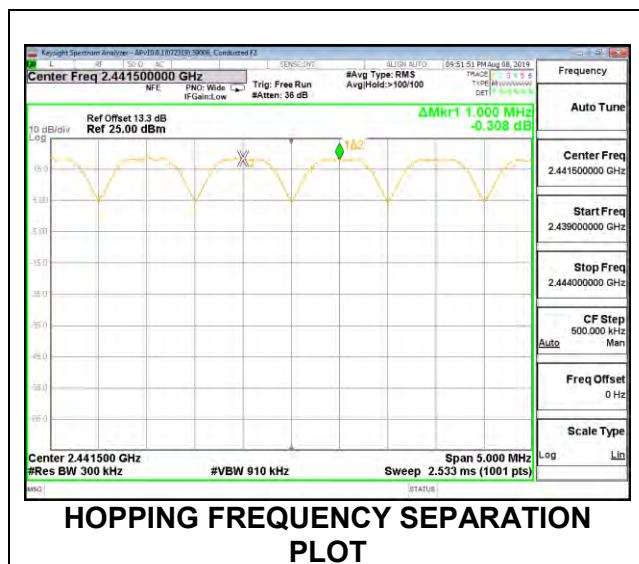


Antenna 3

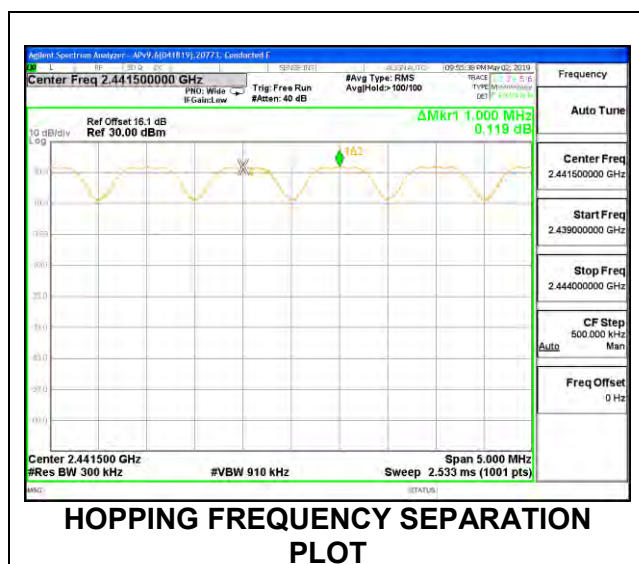


8.4.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

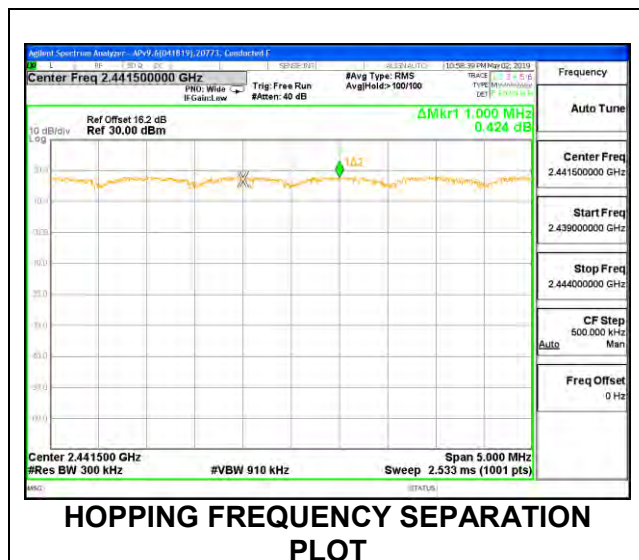


Antenna 3

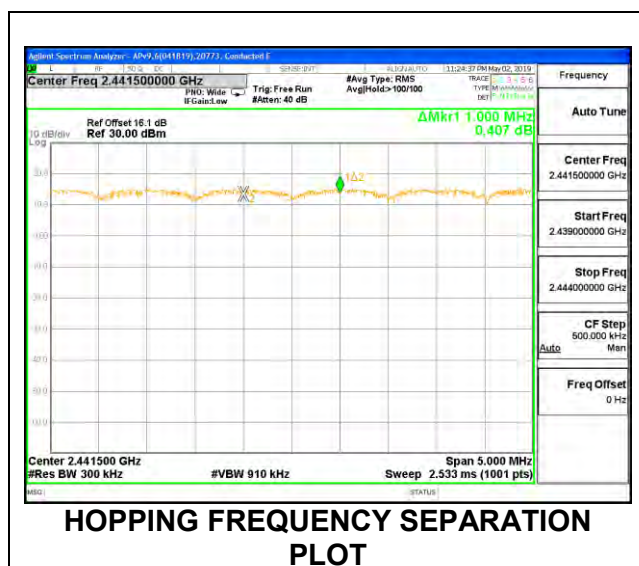


8.4.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

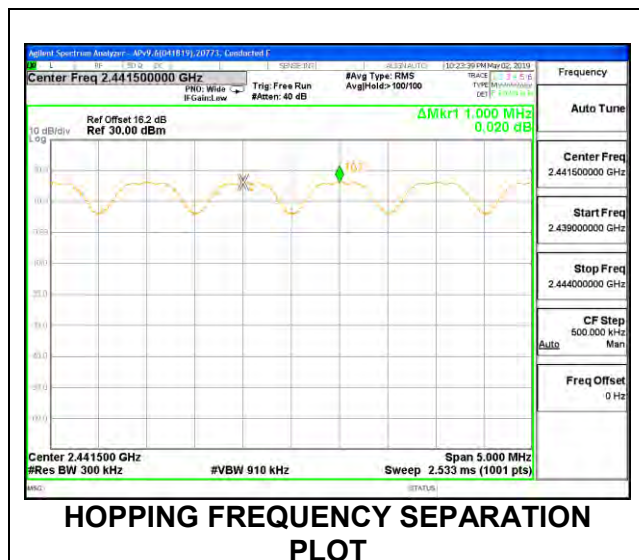


Antenna 3

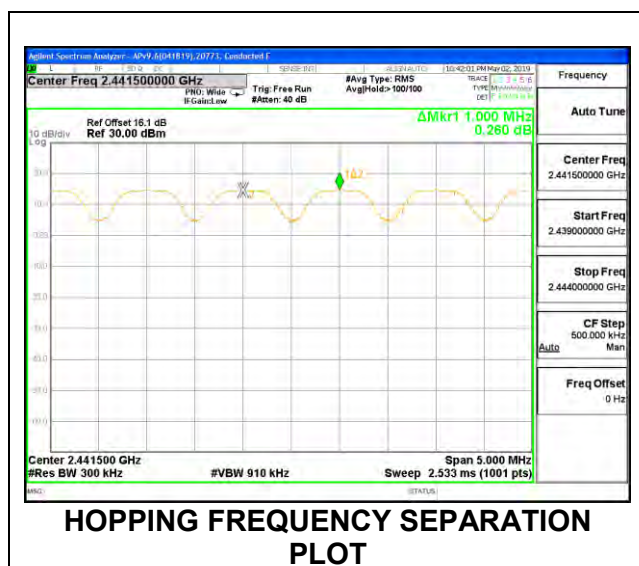


8.4.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

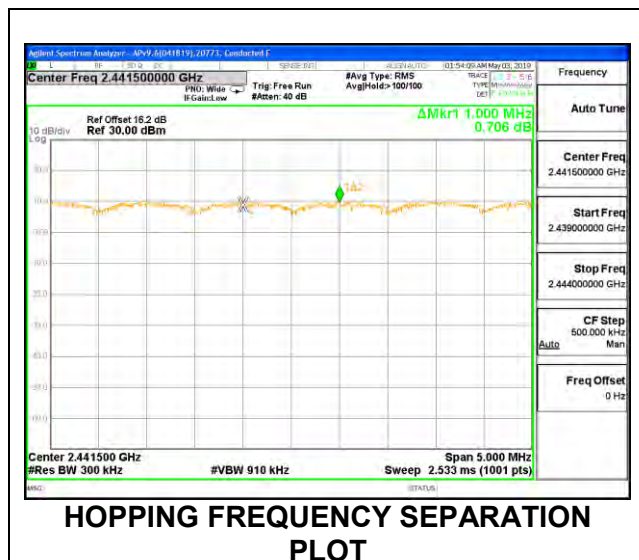

Antenna 3

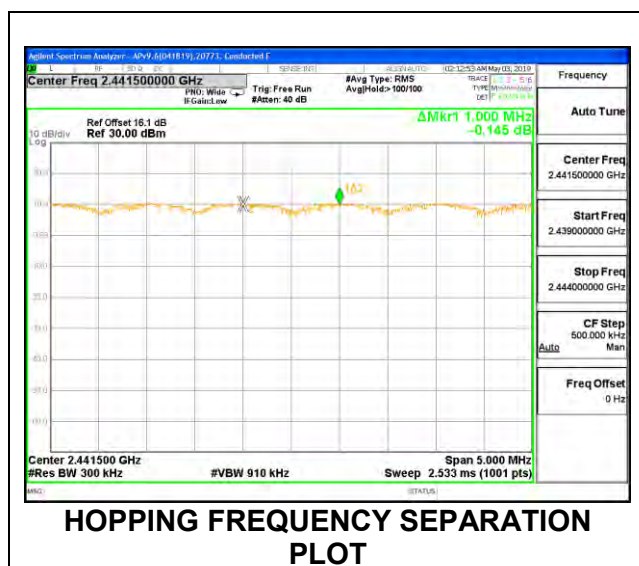

8.5. BEAMFORMING HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.

Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode


RESULTS

8.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

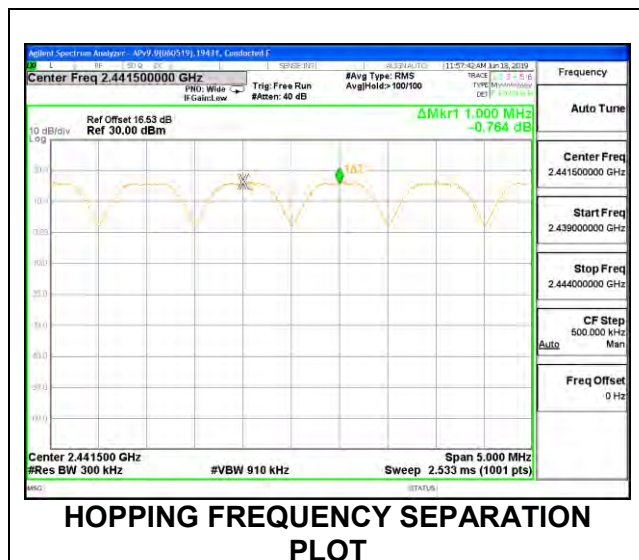


Antenna 3

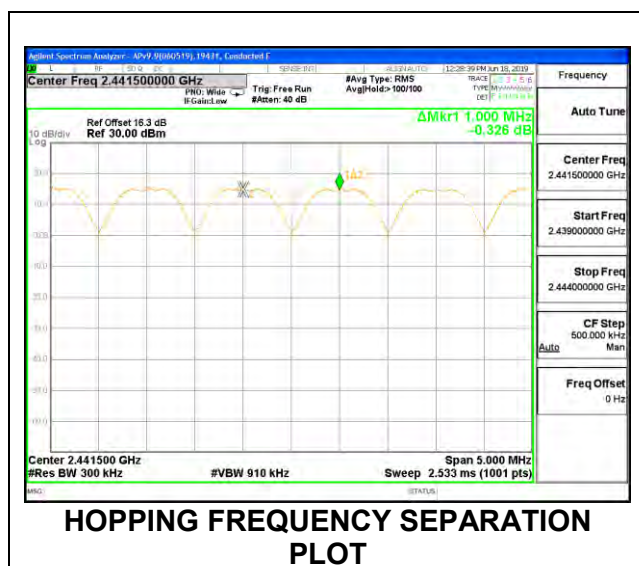


8.5.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

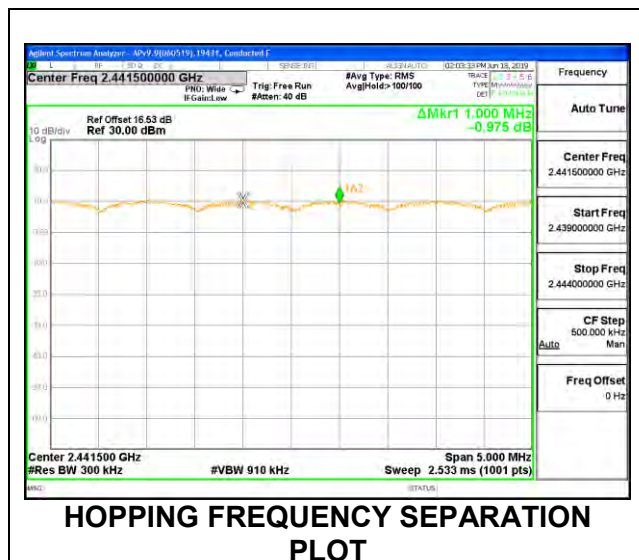


Antenna 3

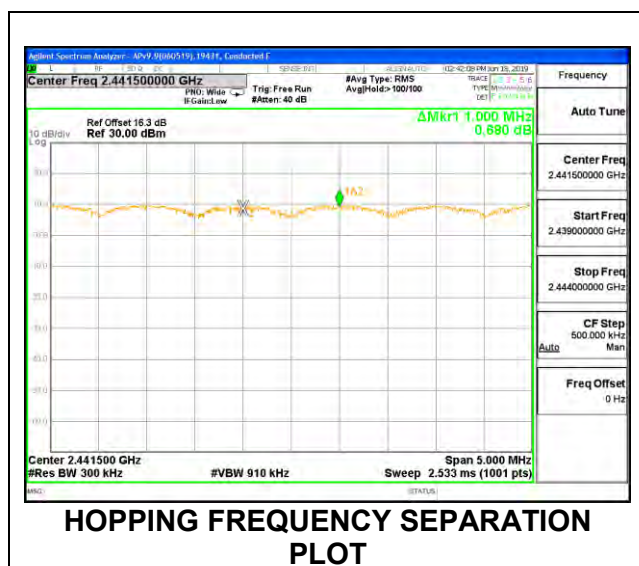


8.5.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

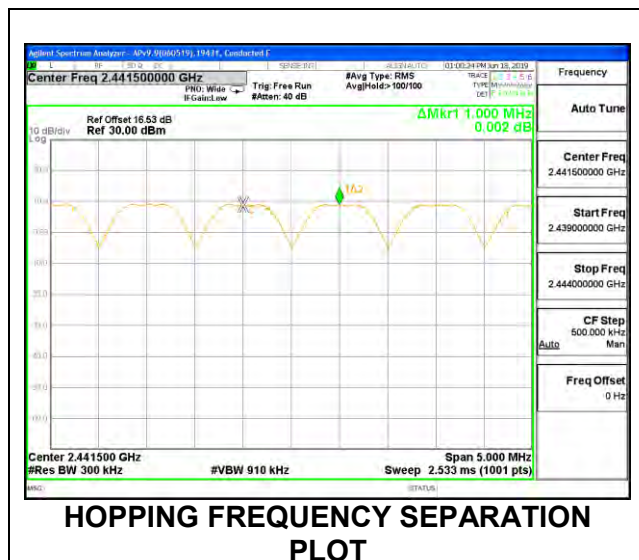


Antenna 3

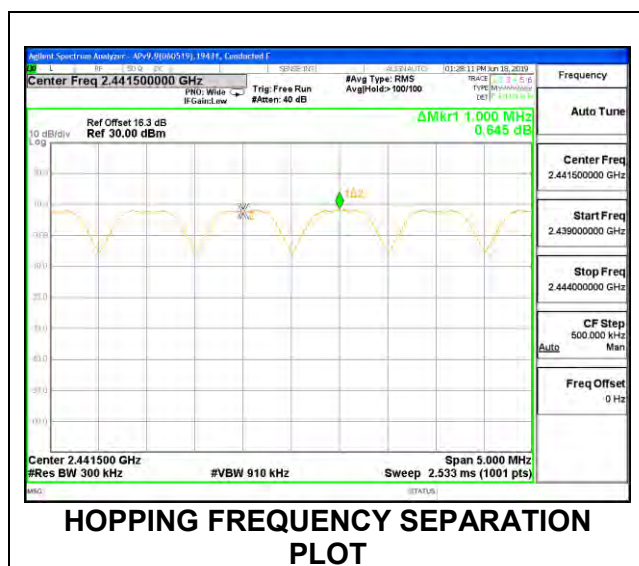


8.5.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

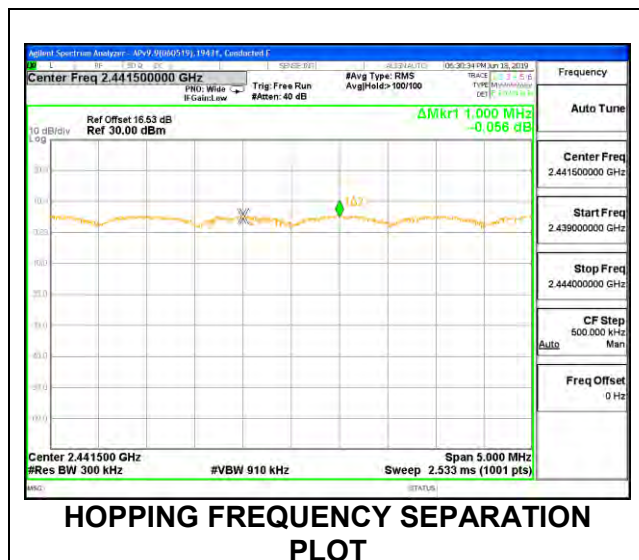

Antenna 3

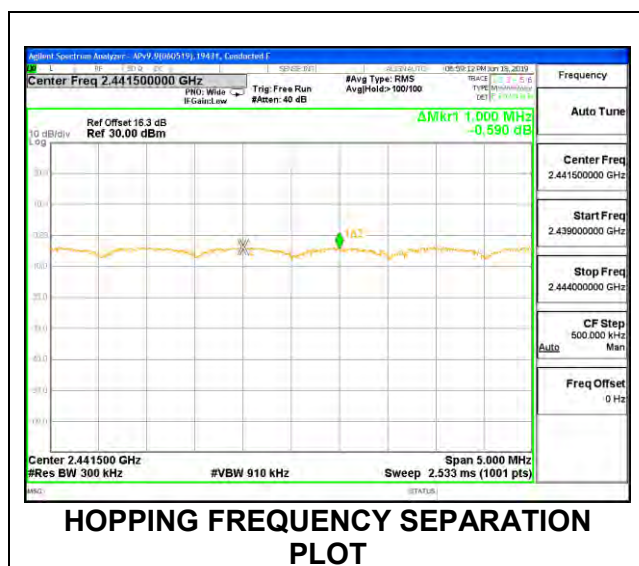

8.6. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels Observed

8.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

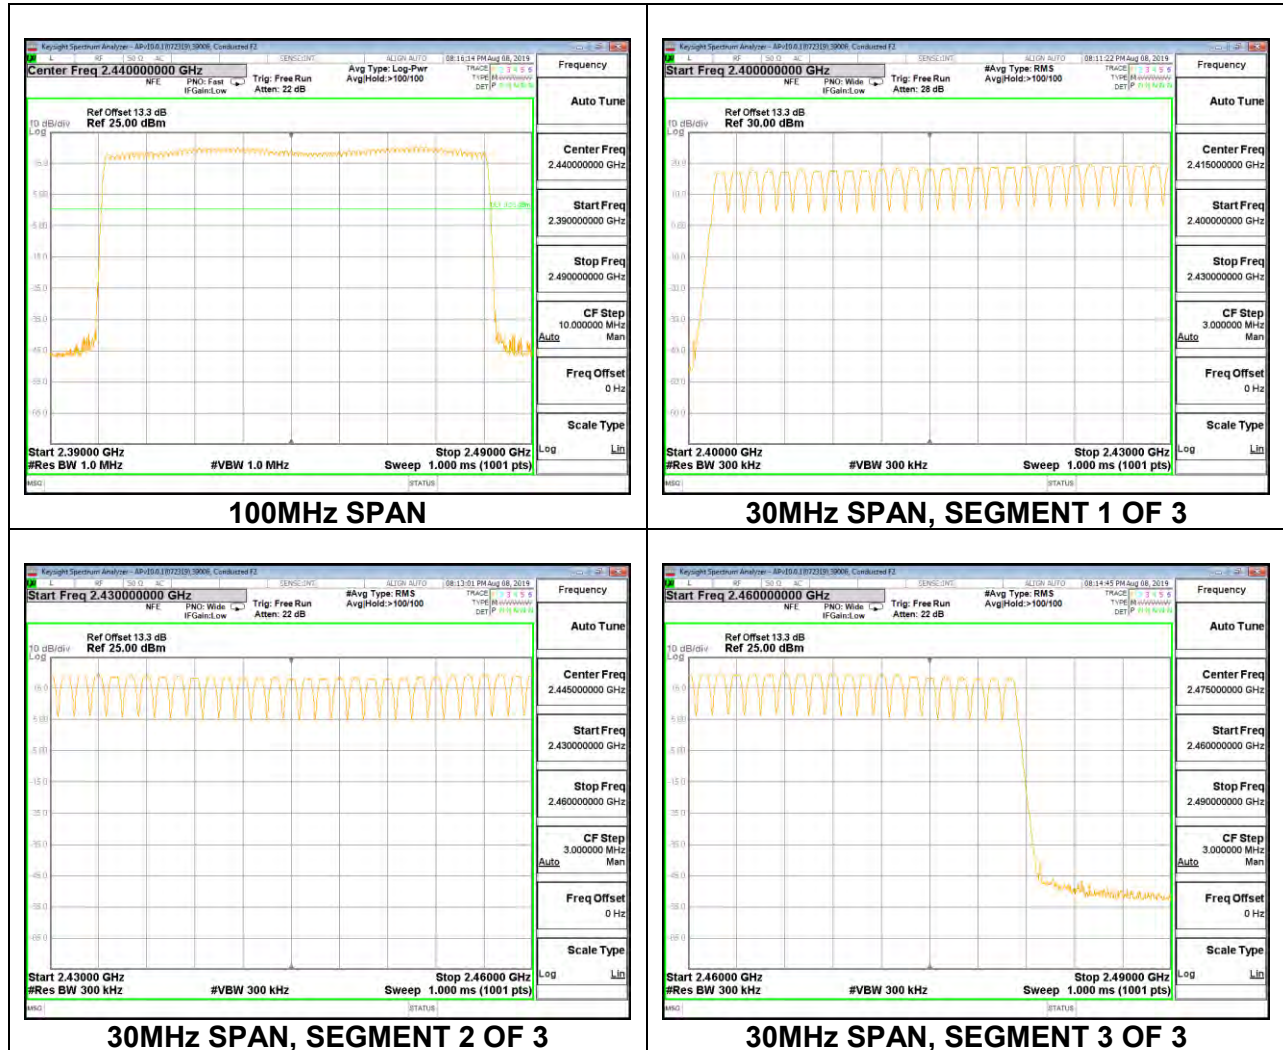


Antenna 3

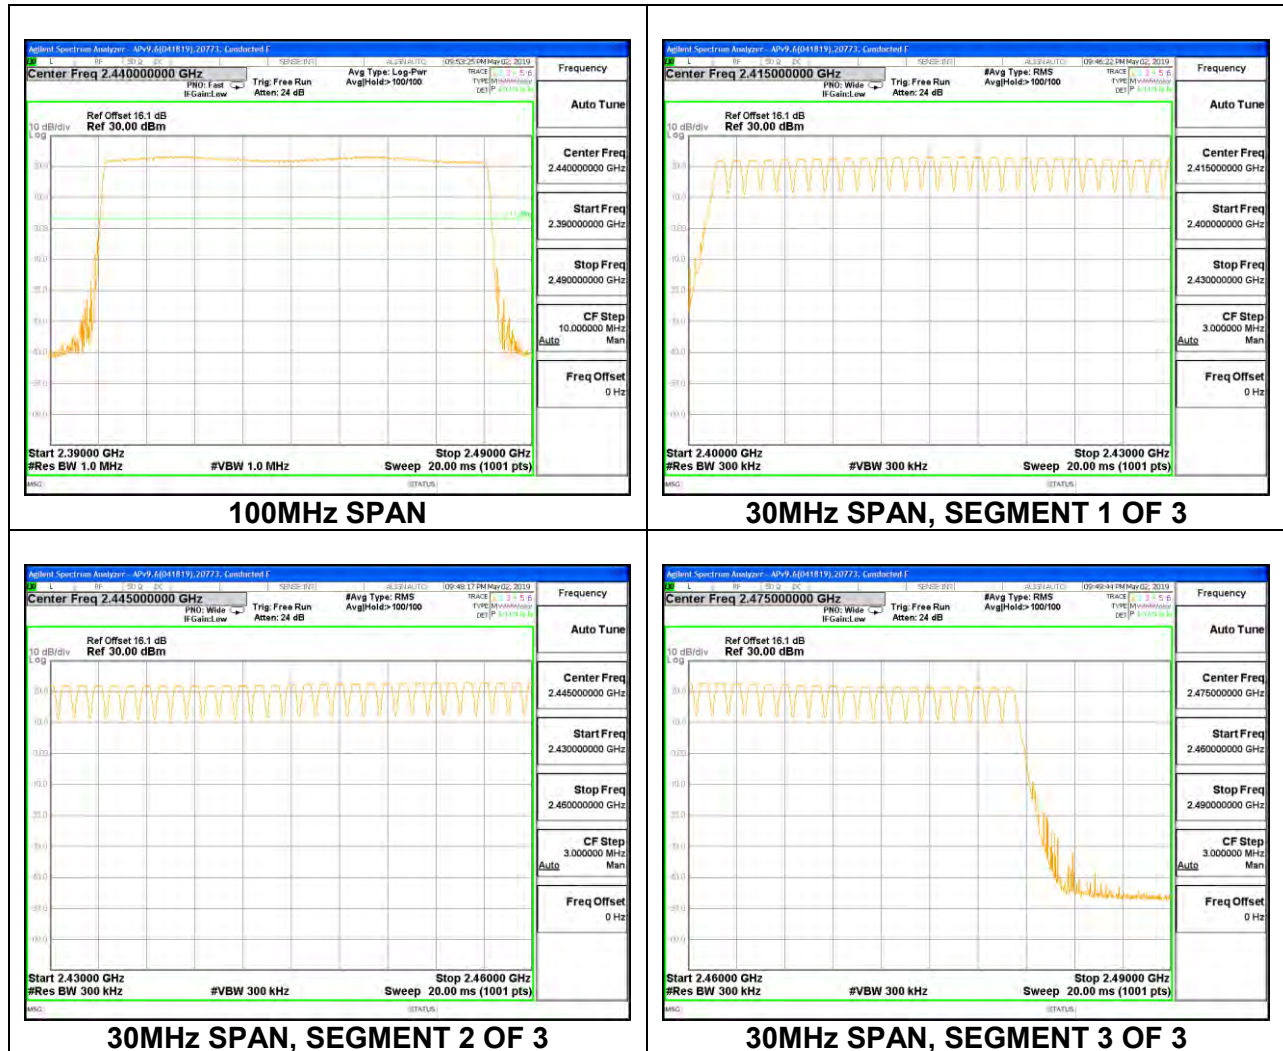


8.6.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

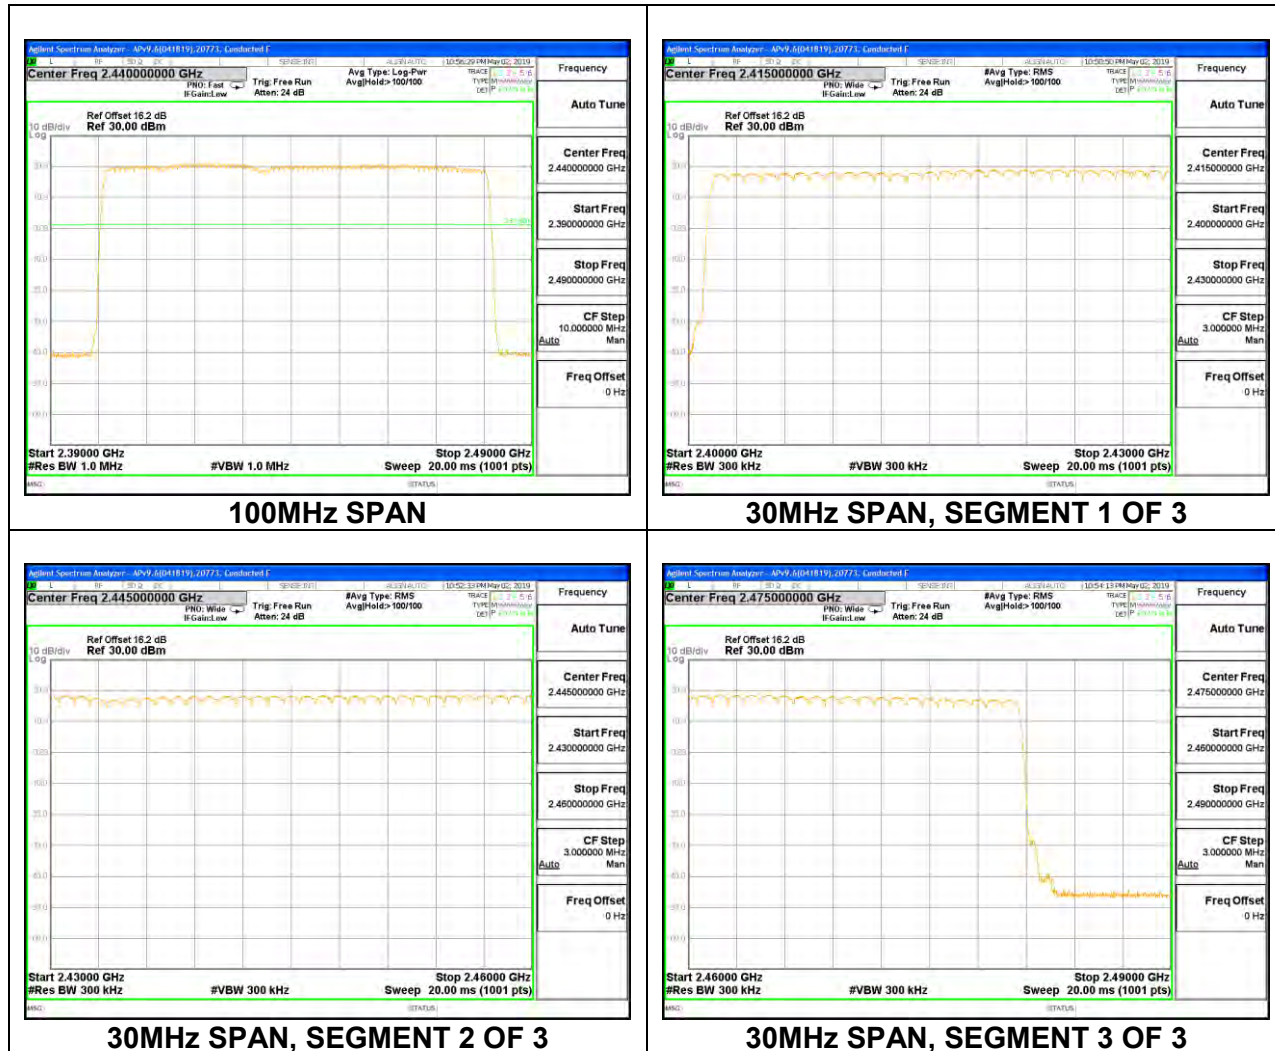


Antenna 3

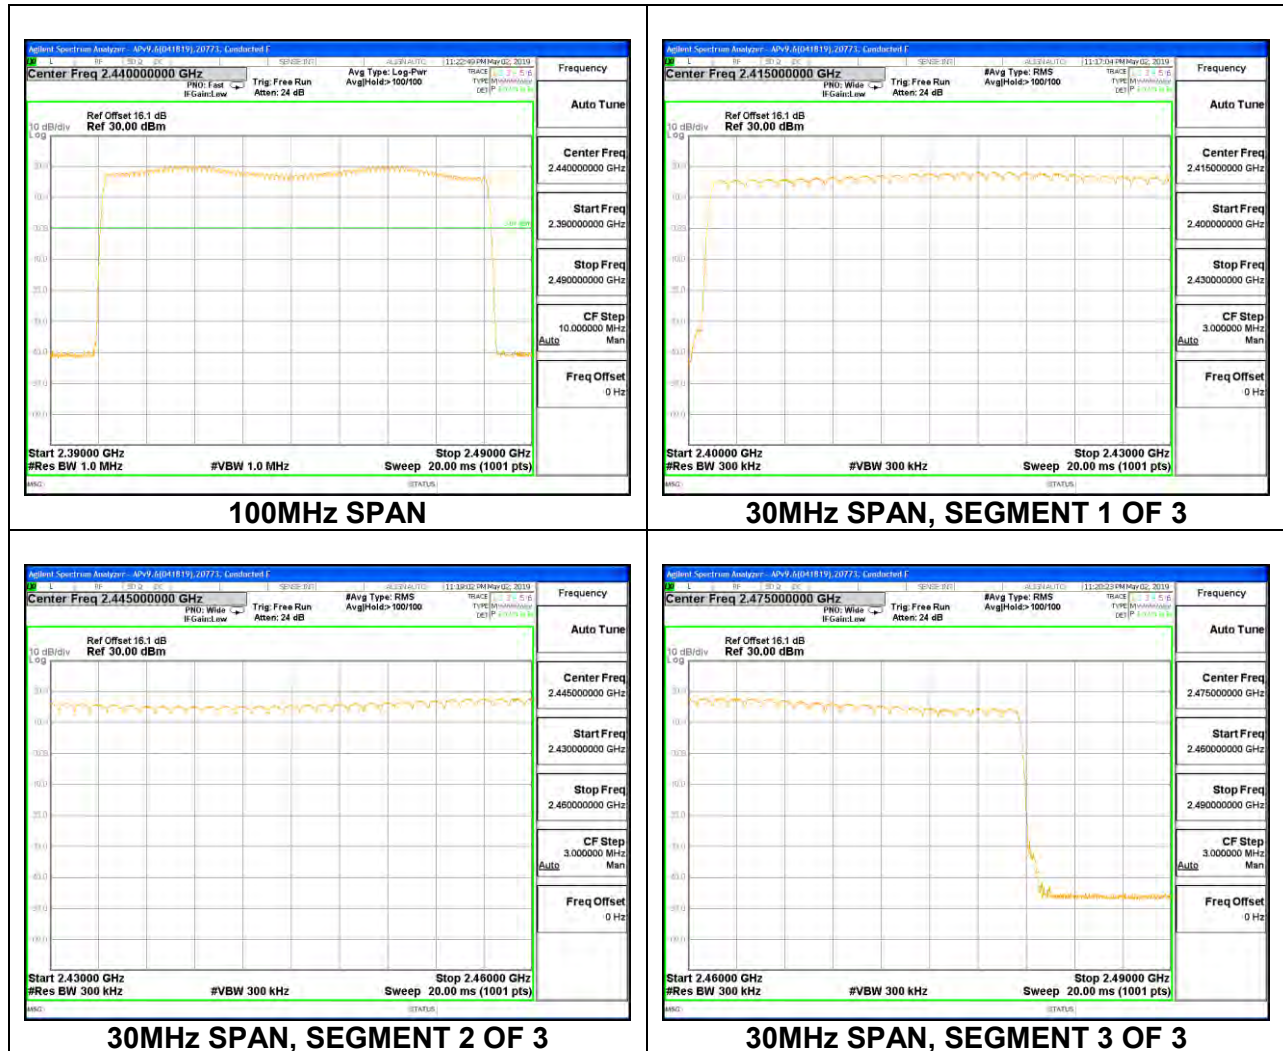


8.6.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

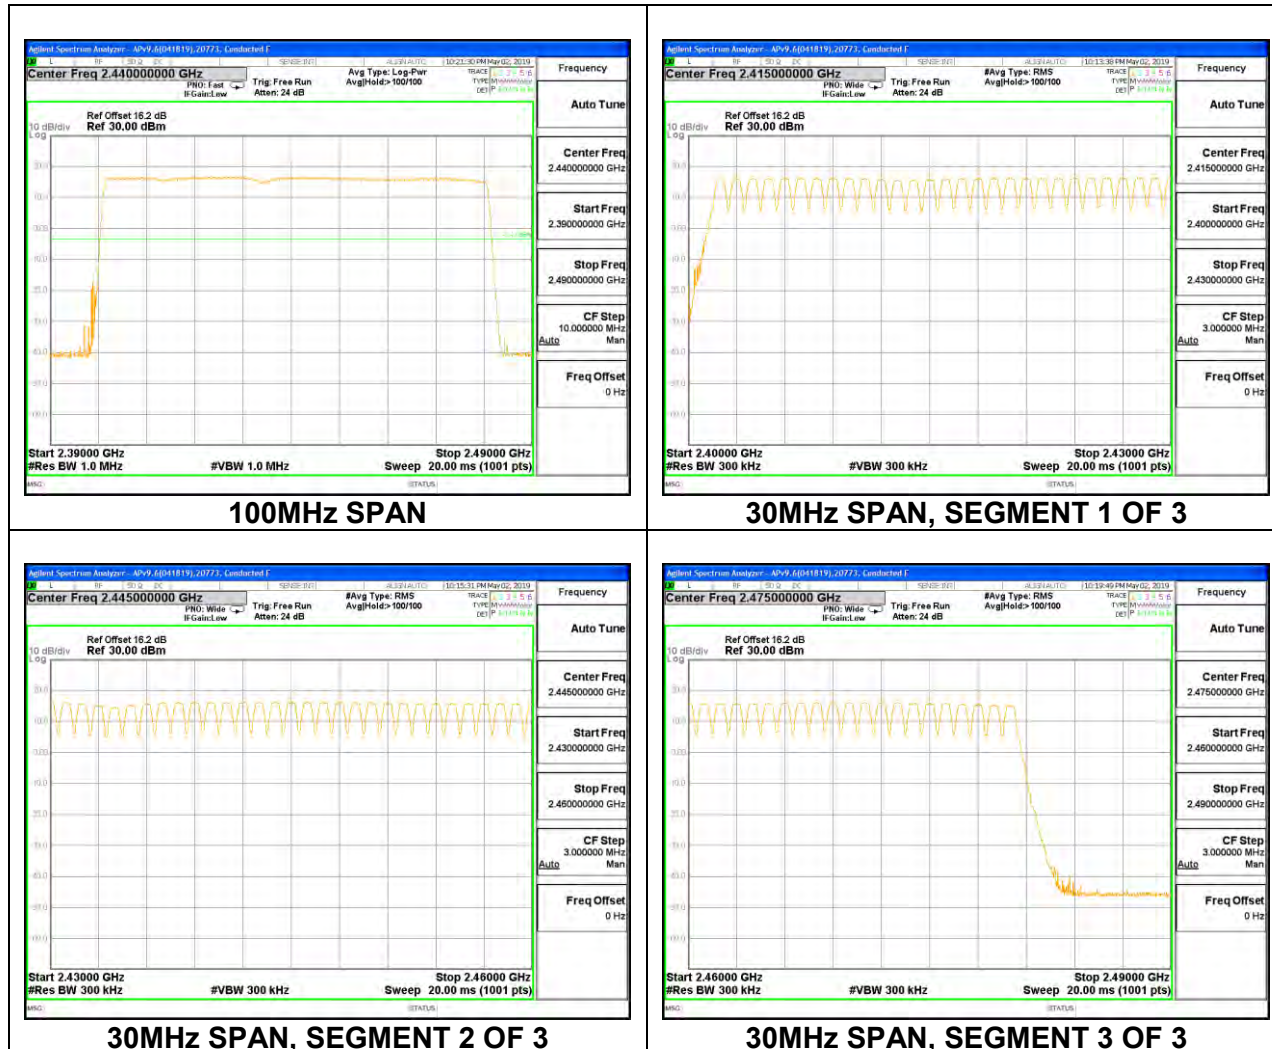


Antenna 3

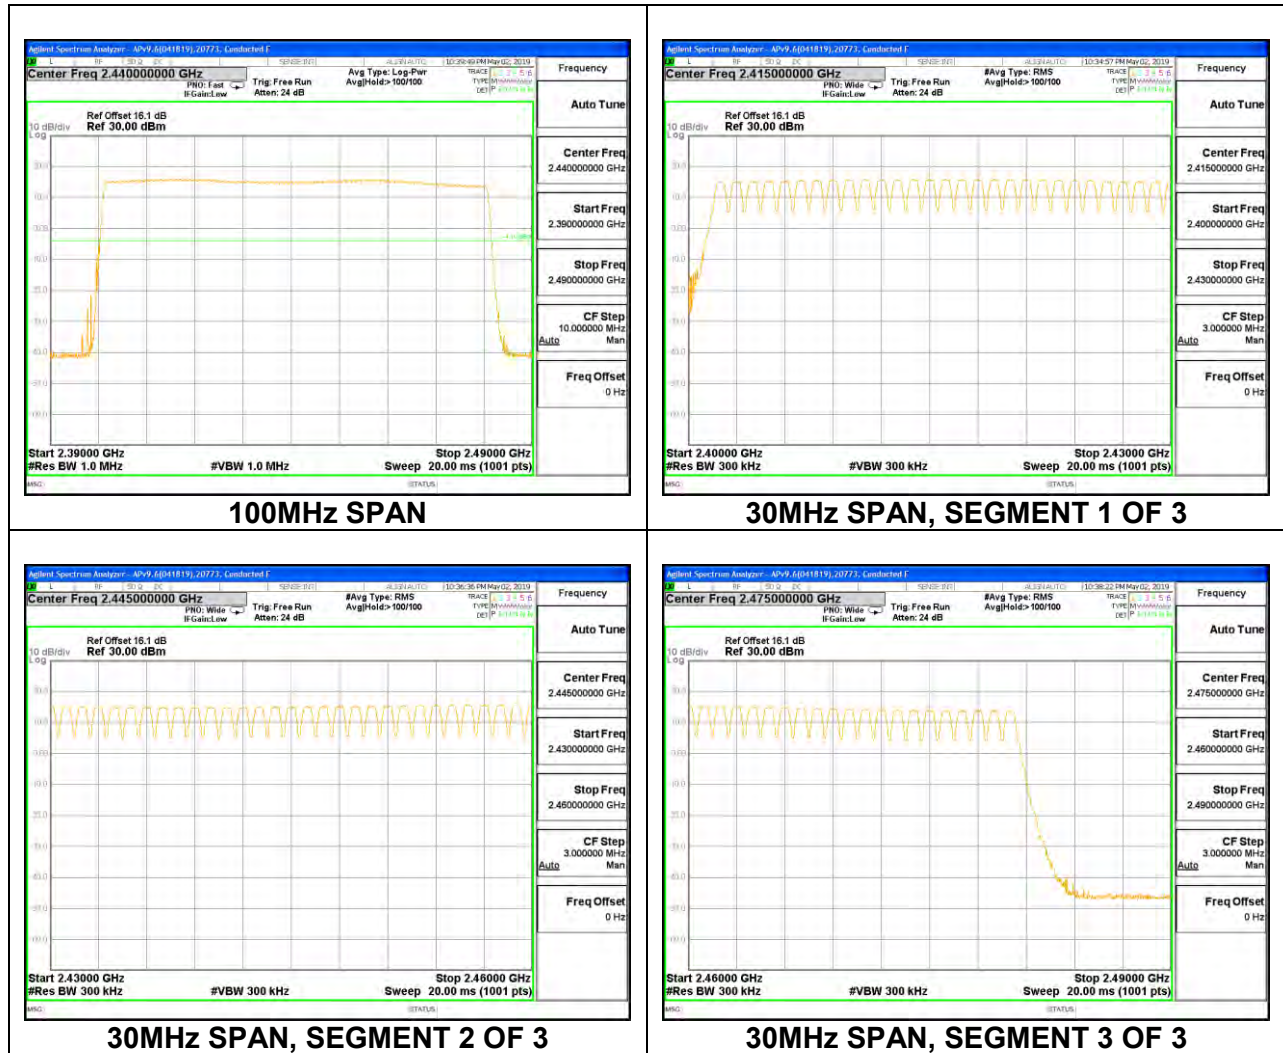


8.6.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

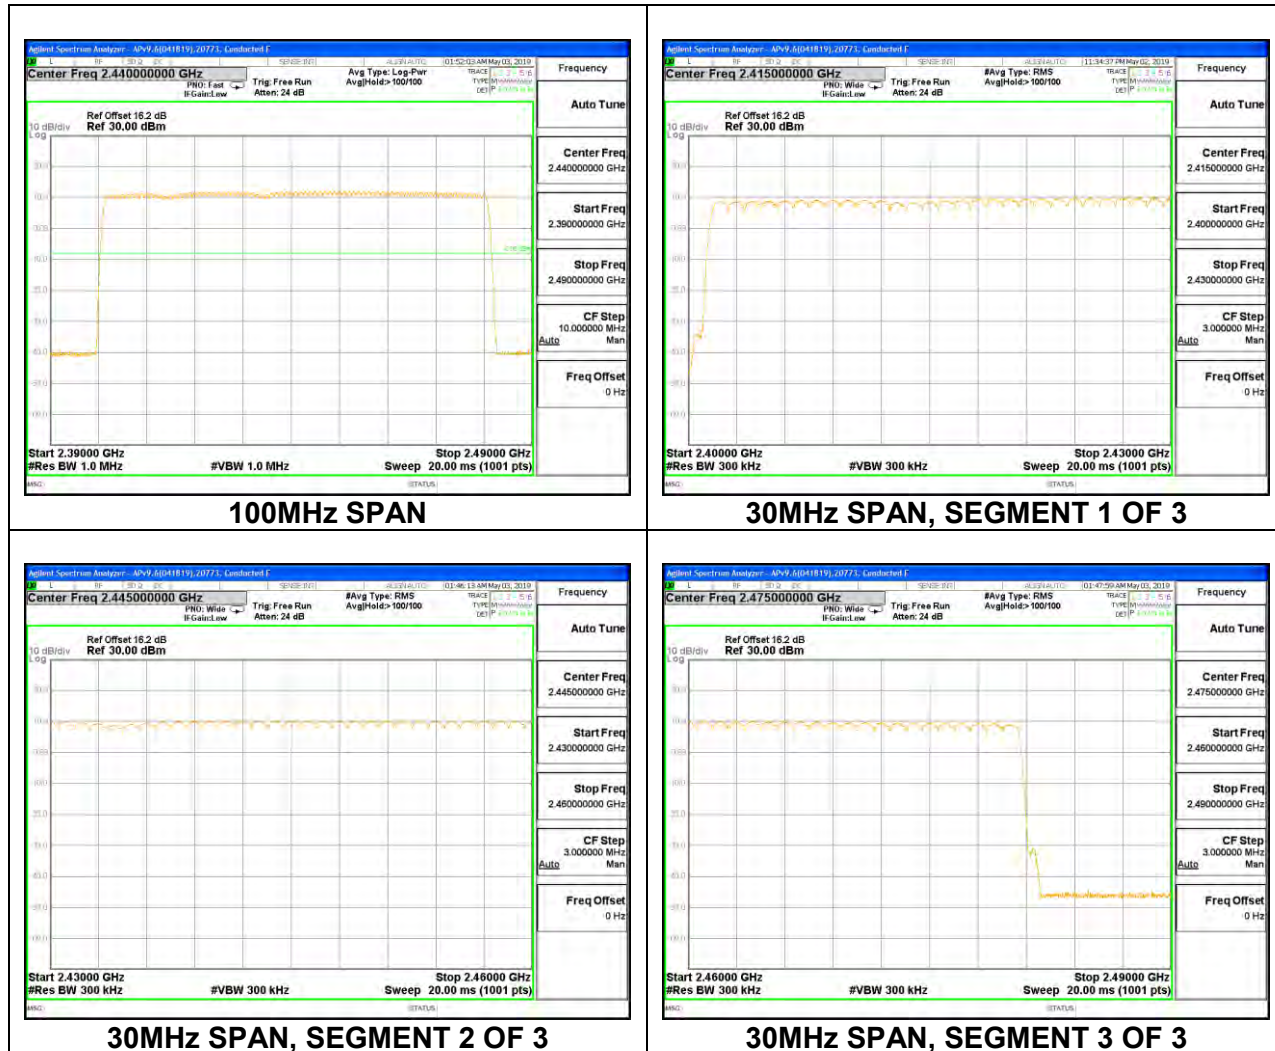

Antenna 3

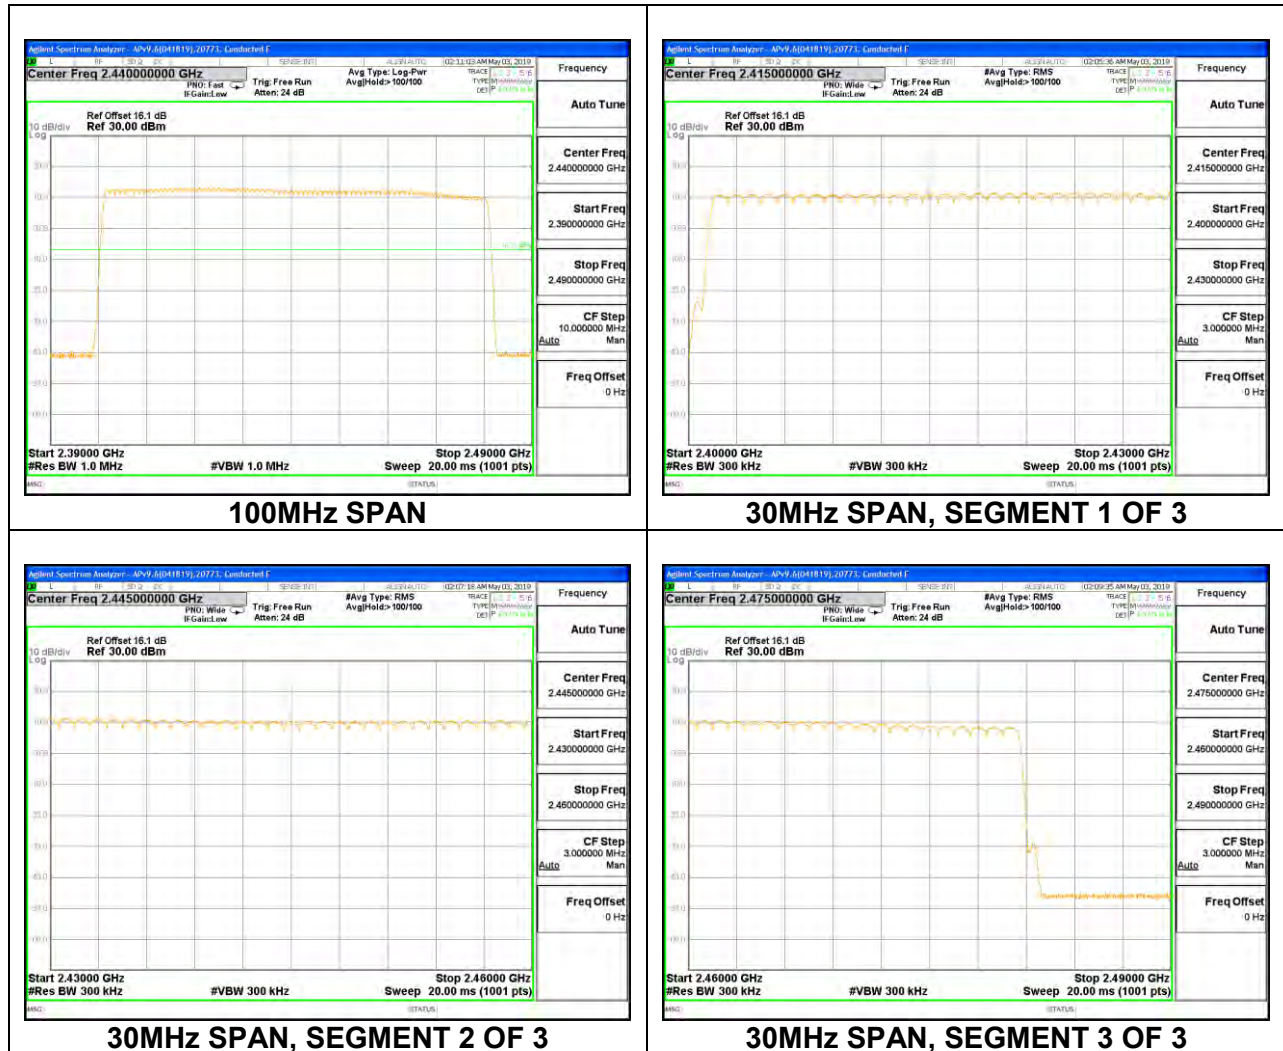

8.7. BEAMFORMING NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

RESULTS


Normal Mode: 79 Channels Observed

8.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

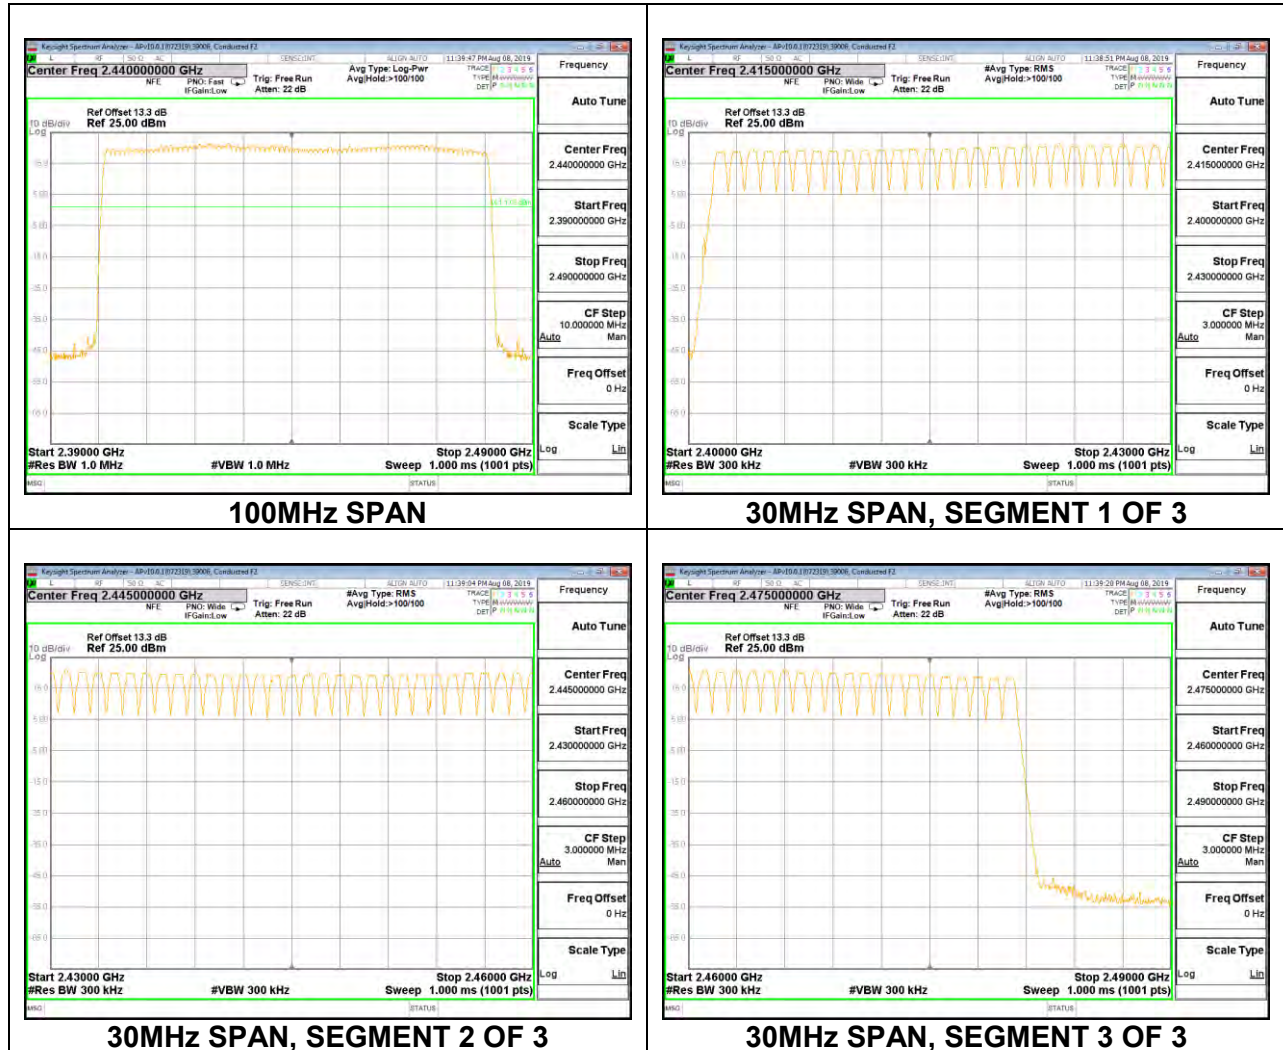


Antenna 3

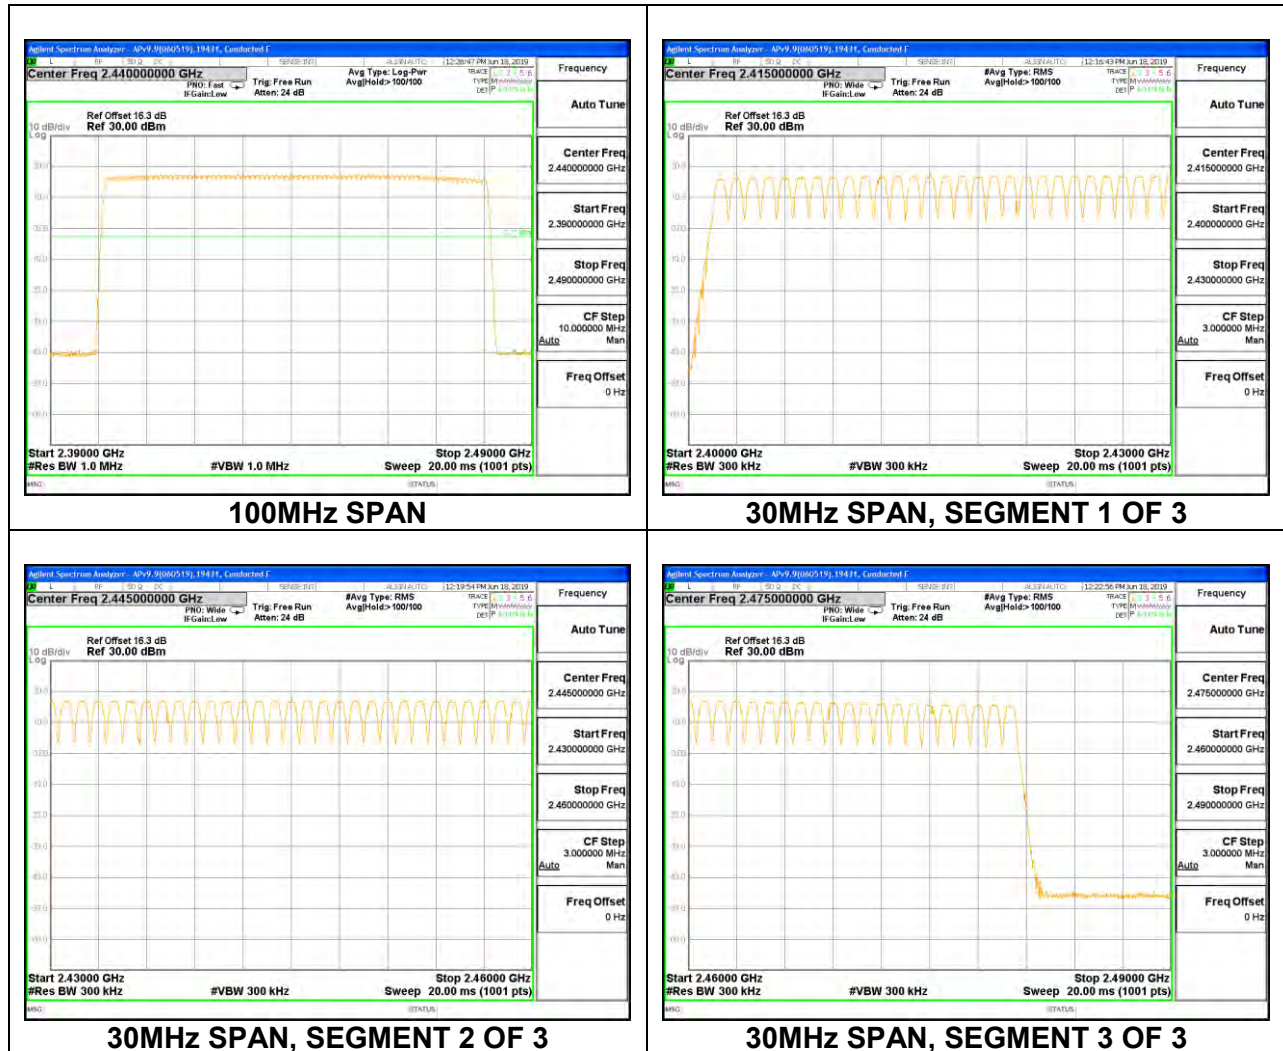


8.7.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

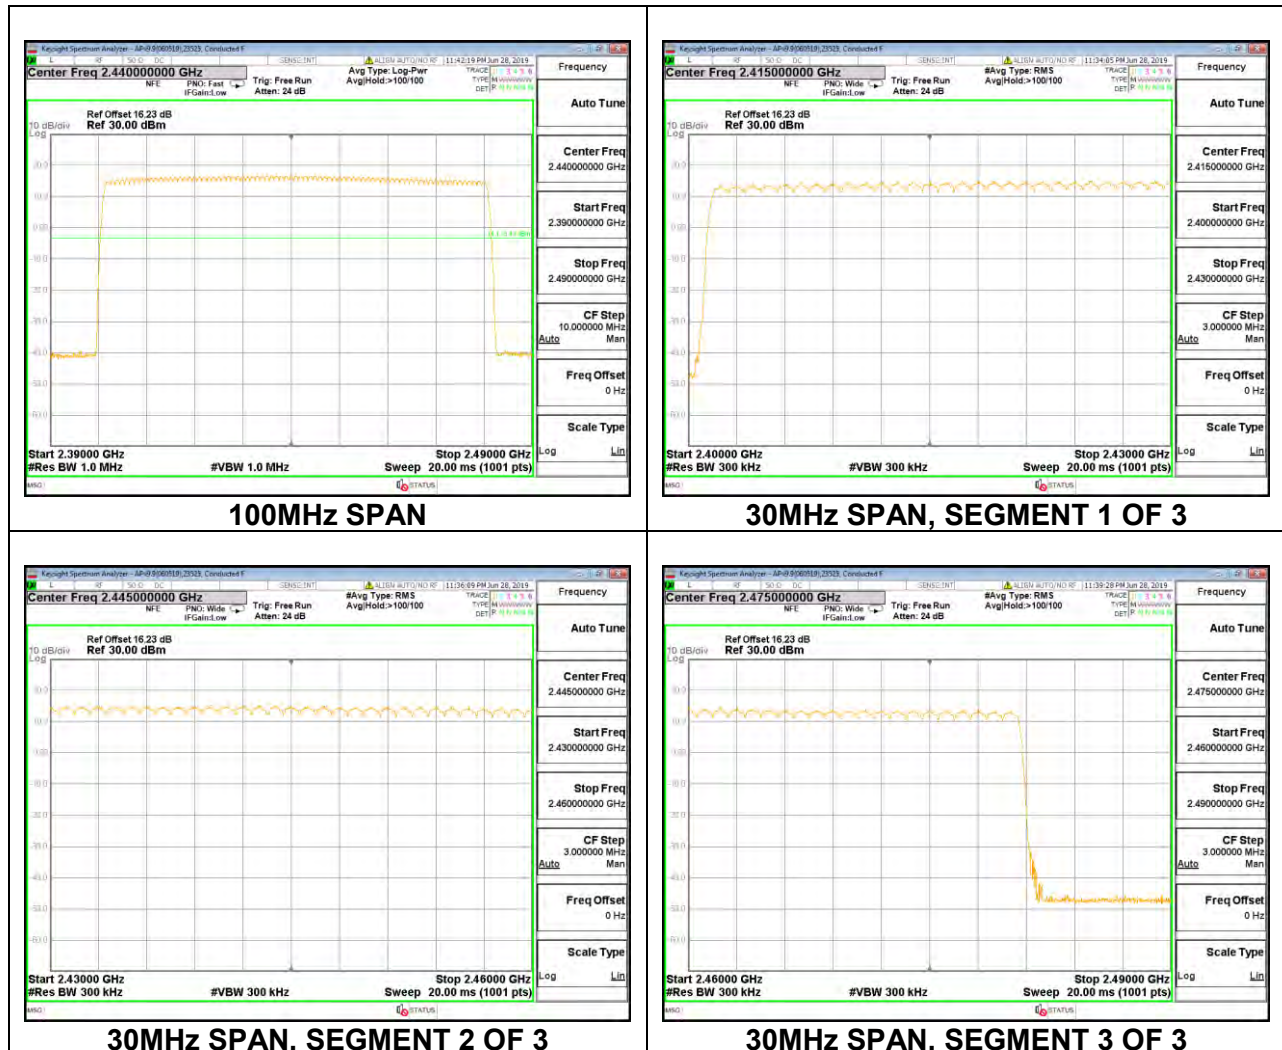


Antenna 3

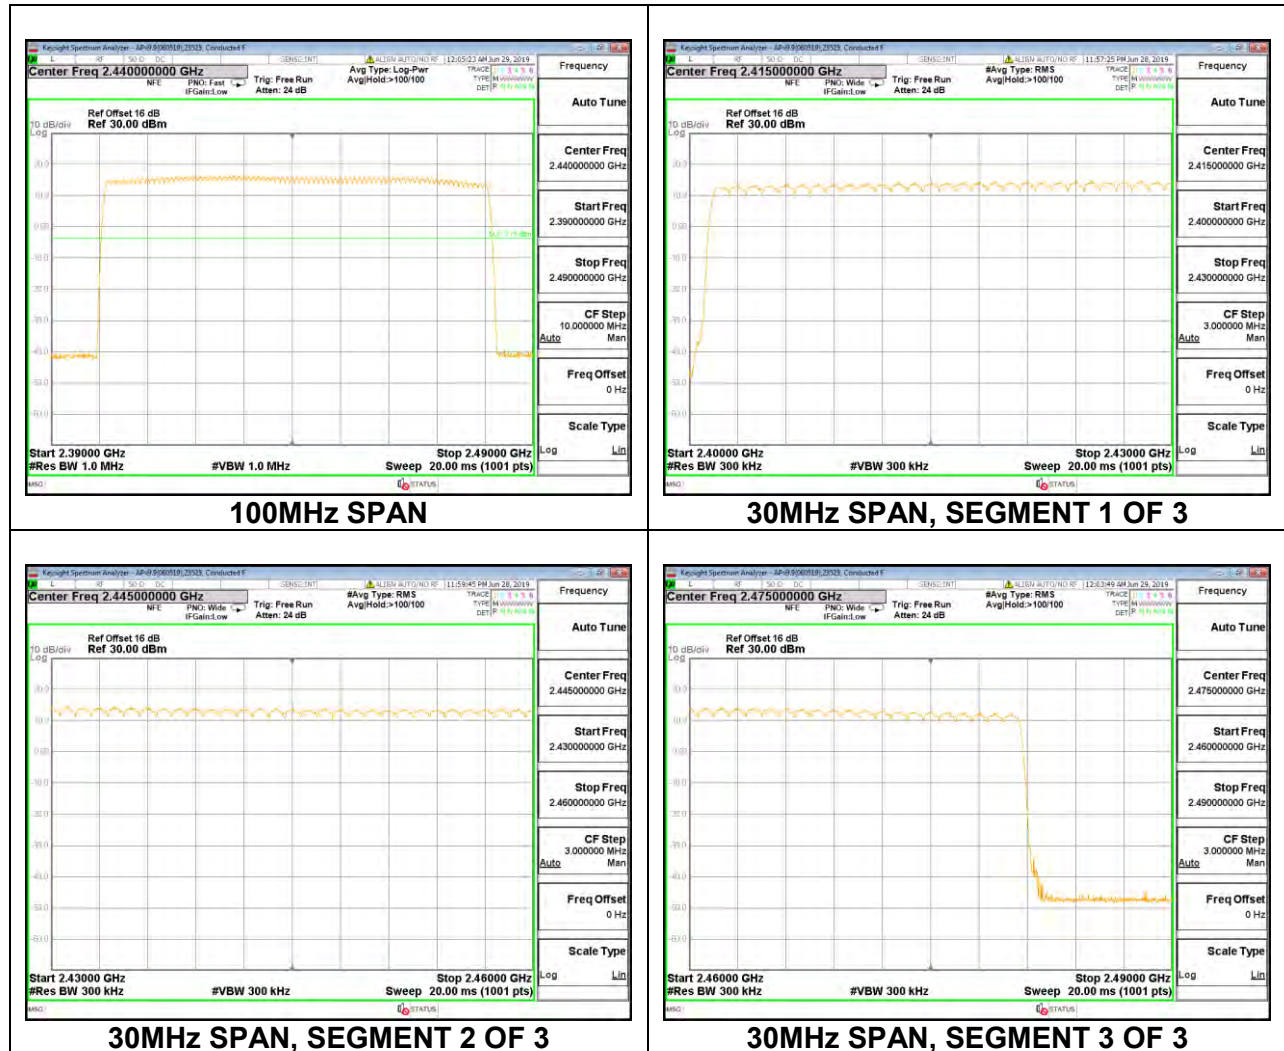


8.7.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

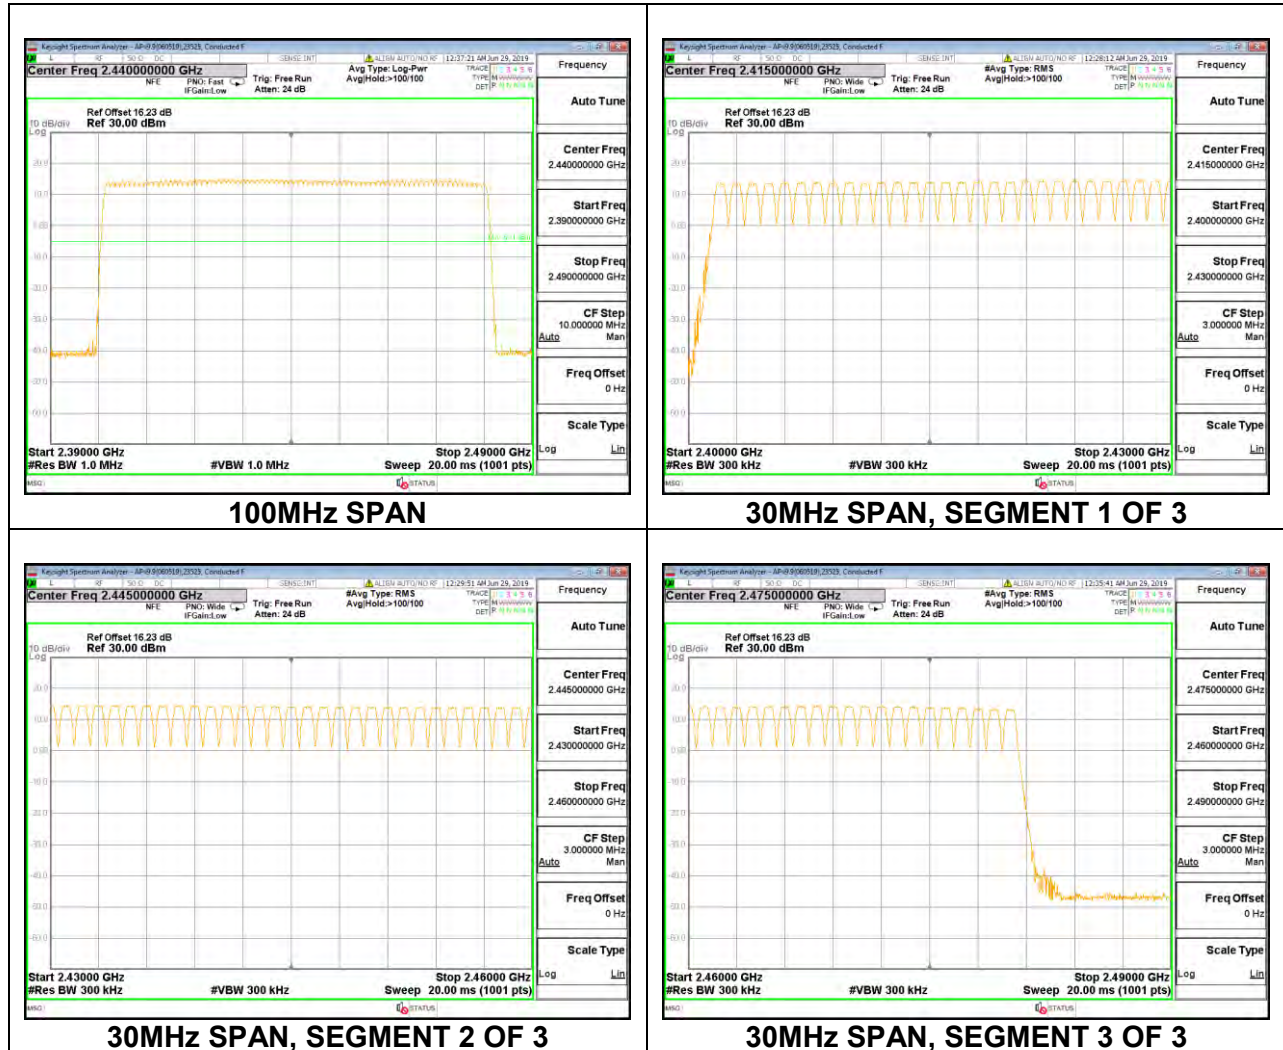


Antenna 3

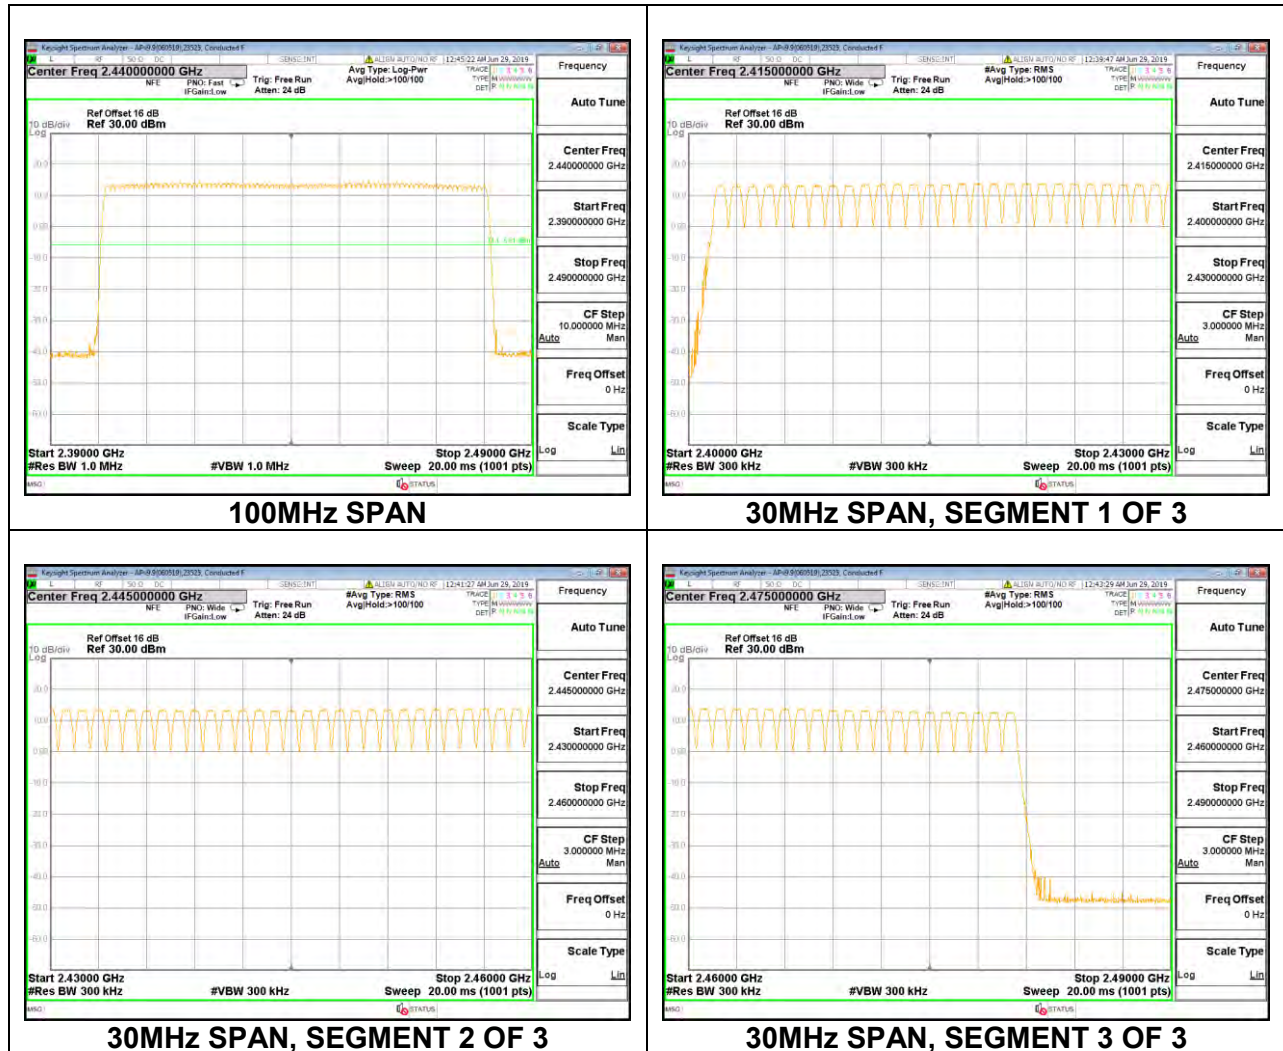


8.7.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

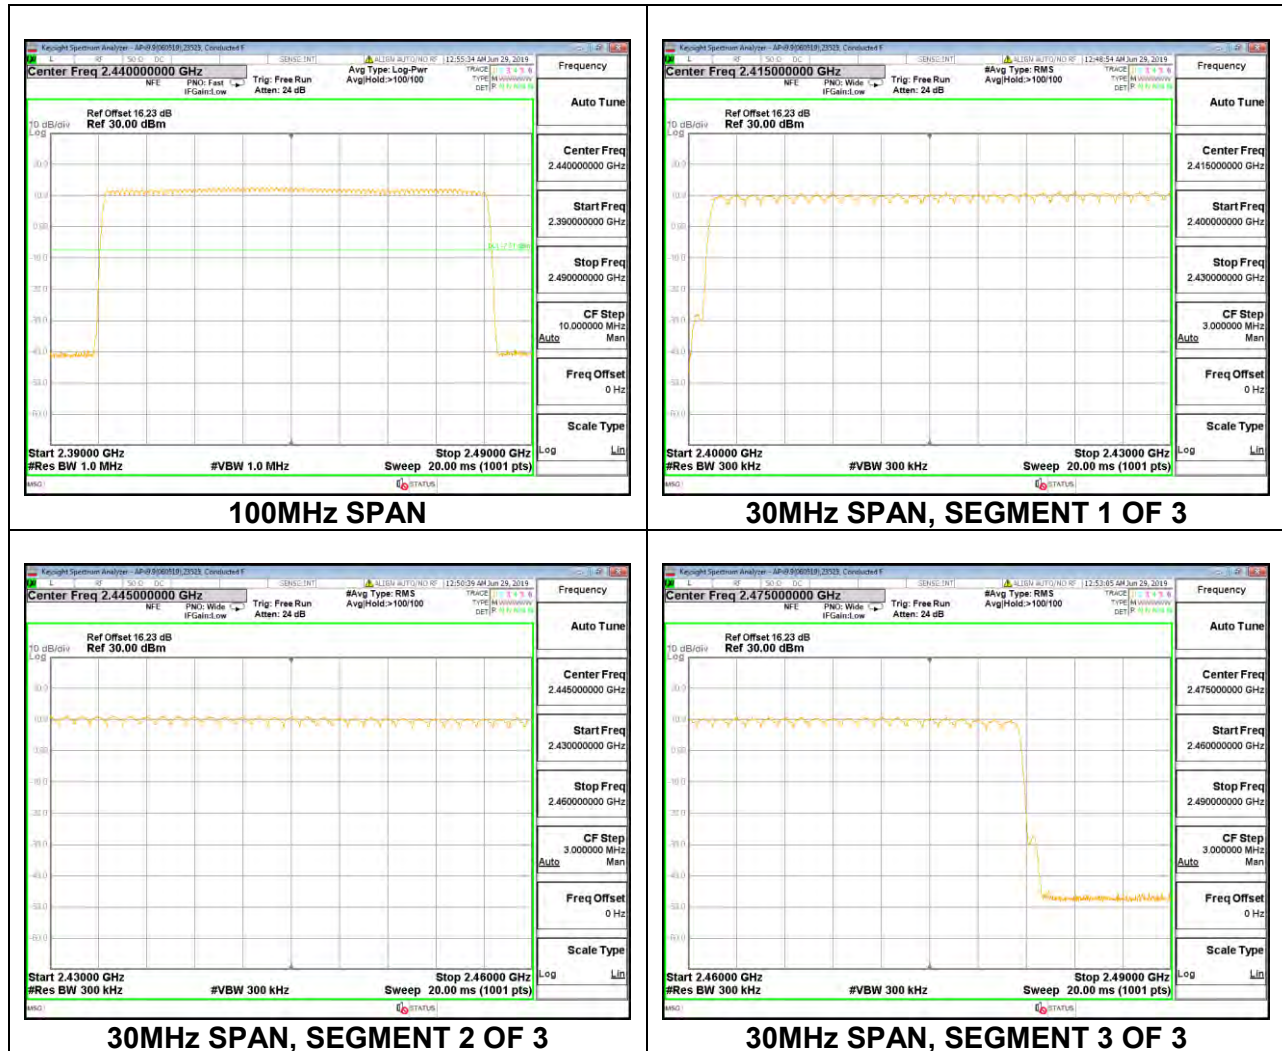

Antenna 3

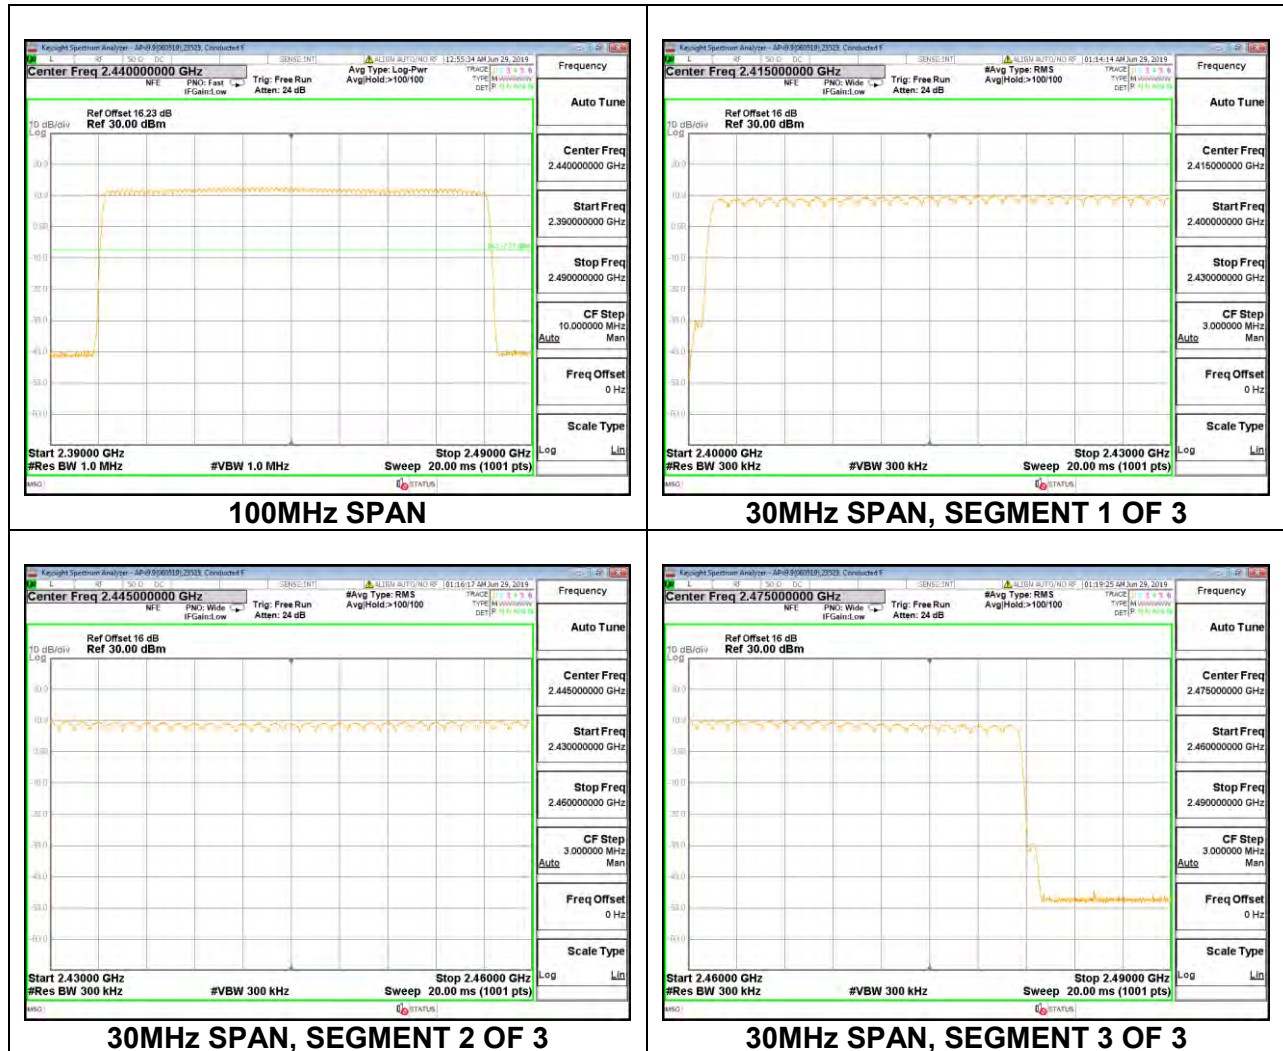

8.8. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

8.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
3DH1	0.381	33	0.1257	0.4	-0.2743
3DH3	1.638	17	0.2785	0.4	-0.1215
3DH5	2.888	10	0.2888	0.4	-0.1112
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
3DH1	0.381	8.25	0.03143	0.4	-0.3686
3DH3	1.638	4.25	0.06962	0.4	-0.3304
3DH5	2.888	2.5	0.07220	0.4	-0.3278

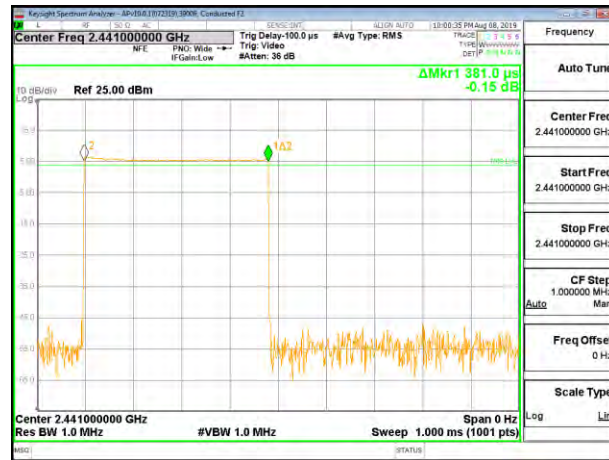


PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3

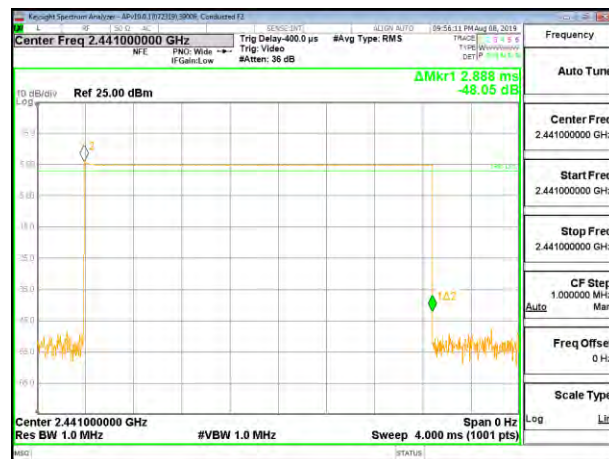


PULSE WIDTH – 3DH5

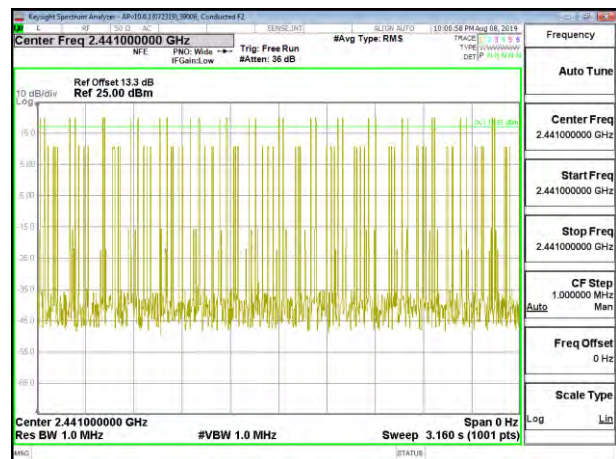

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

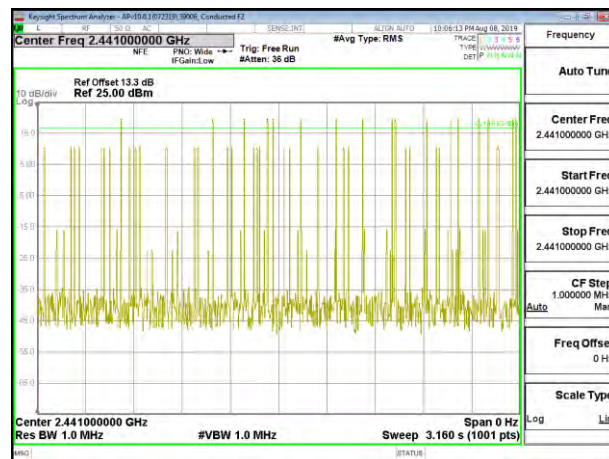


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

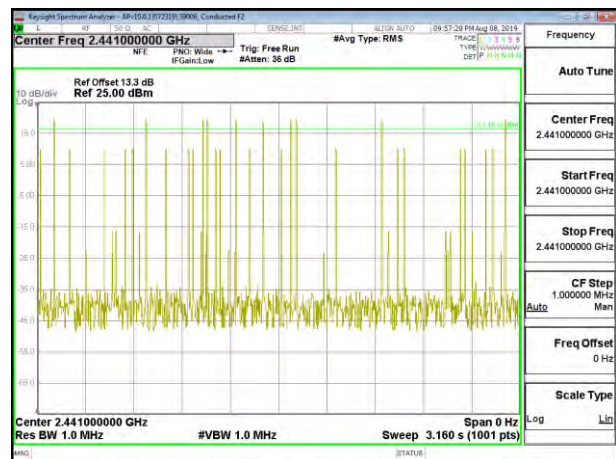

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

Antenna 3


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
3DH1	0.381	32	0.1219	0.4	-0.2781
3DH3	1.638	18	0.2948	0.4	-0.1052
3DH5	2.888	5	0.1444	0.4	-0.2556
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
3DH1	0.381	8	0.03048	0.4	-0.3695
3DH3	1.638	4.5	0.07371	0.4	-0.3263
3DH5	2.888	1.25	0.03610	0.4	-0.3639

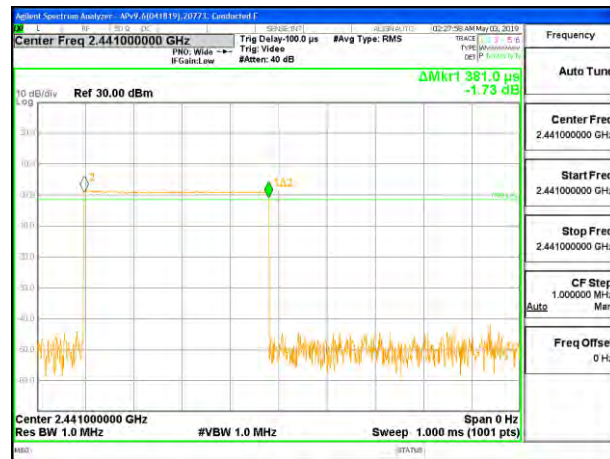

PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3

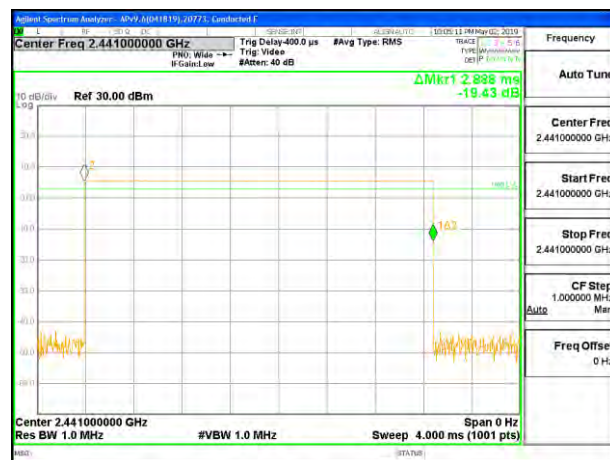

PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

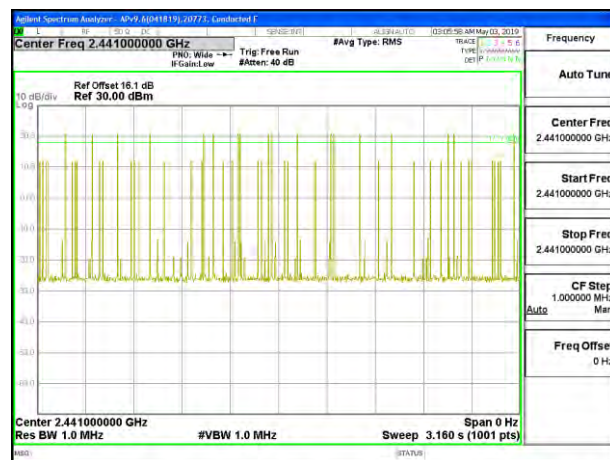

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.8.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	31	0.11997	0.4	-0.28
3DH3	1.638	14	0.22932	0.4	-0.1707
3DH5	2.892	11	0.31812	0.4	-0.0819


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.




PULSE WIDTH – 3DH1

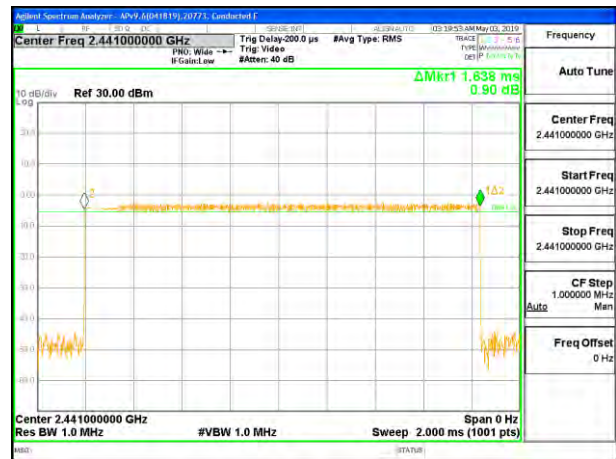

PULSE WIDTH – 3DH3

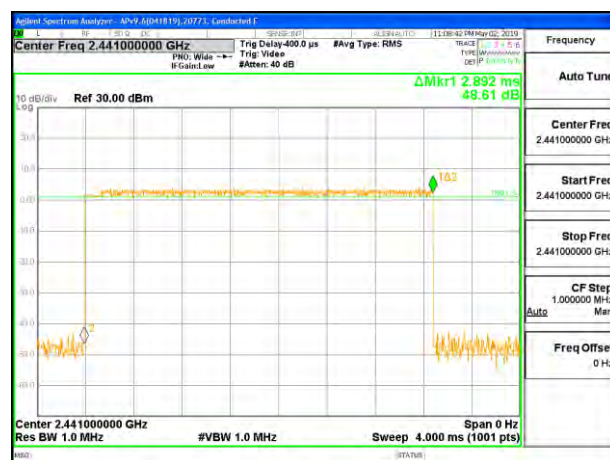

PULSE WIDTH – 3DH5

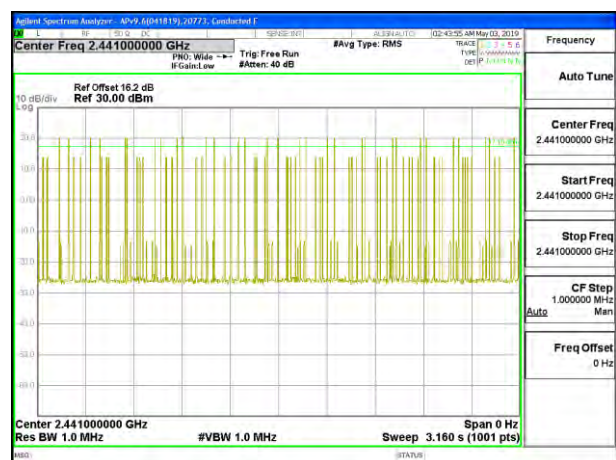

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**




**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	32	0.12384	0.4	-0.2762
3DH3	1.638	15	0.2457	0.4	-0.1543
3DH5	2.888	8	0.23104	0.4	-0.169


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

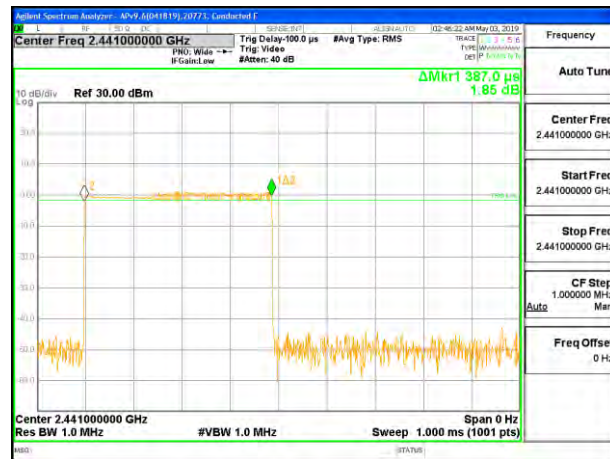

PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3

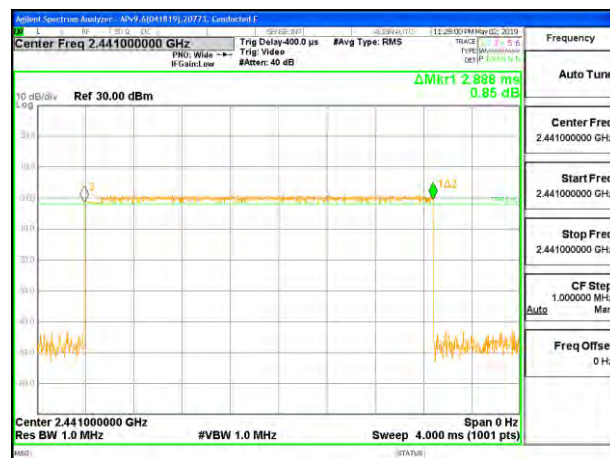

PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

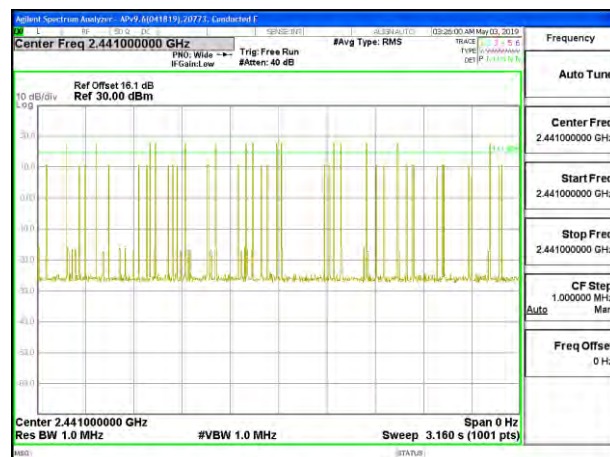

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**




**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.8.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
3DH1	0.381	32	0.1219	0.4	-0.2781
3DH3	1.638	15	0.2457	0.4	-0.1543
3DH5	2.884	11	0.3172	0.4	-0.0828
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
3DH1	0.381	8	0.03048	0.4	-0.3695
3DH3	1.638	3.75	0.06143	0.4	-0.3386
3DH5	2.884	2.75	0.07931	0.4	-0.3207

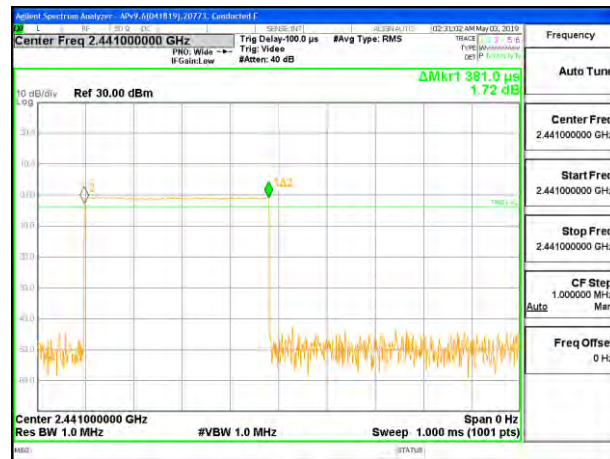

PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3



PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

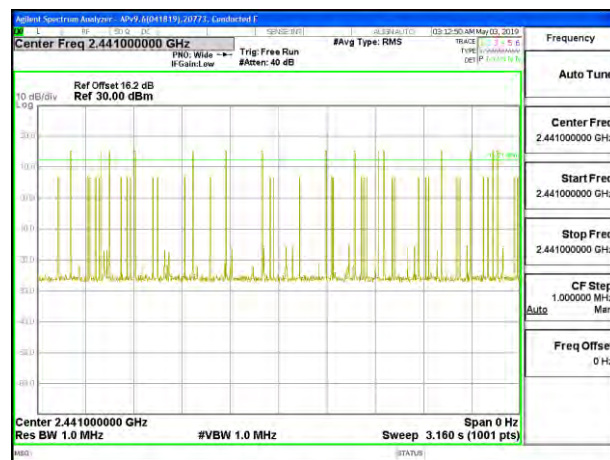

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

Antenna 3


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
3DH1	0.381	32	0.1219	0.4	-0.2781
3DH3	1.636	17	0.2781	0.4	-0.1219
3DH5	2.884	6	0.1730	0.4	-0.2270
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
3DH1	0.381	8	0.03048	0.4	-0.3695
3DH3	1.636	4.25	0.06953	0.4	-0.3305
3DH5	2.884	1.5	0.04326	0.4	-0.3567




PULSE WIDTH – 3DH1



PULSE WIDTH – 3DH3

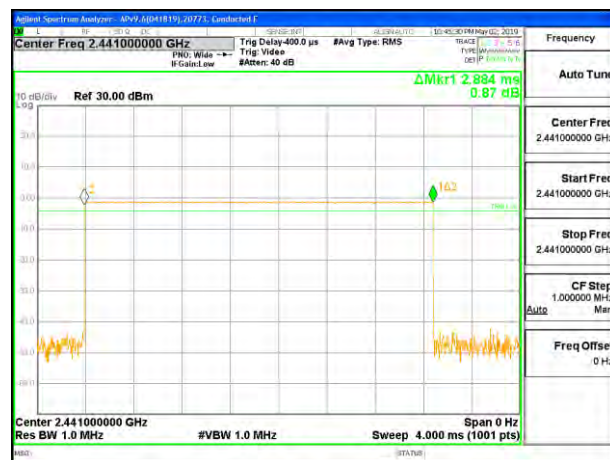


PULSE WIDTH – 3DH5

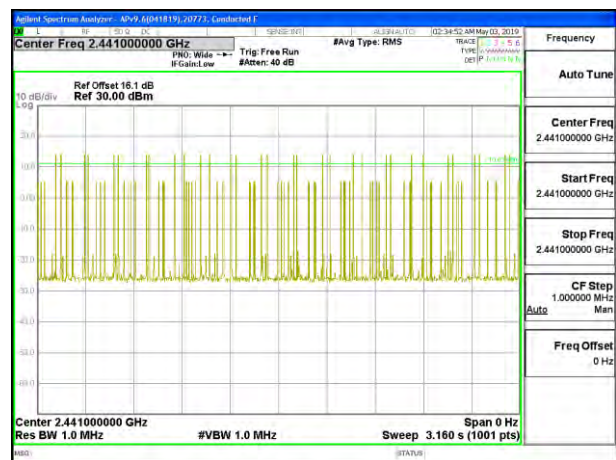

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

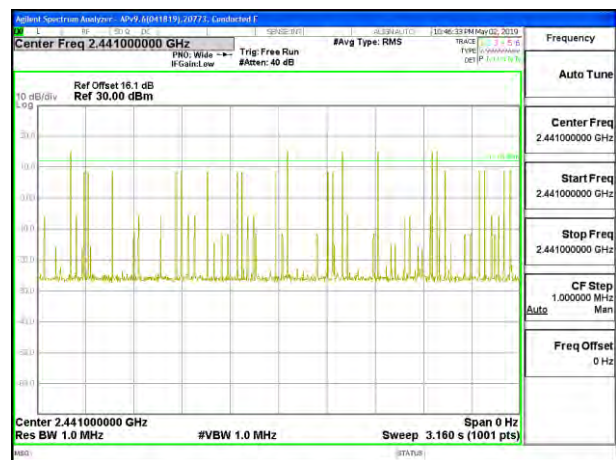

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.8.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.388	32	0.12416	0.4	-0.2758
3DH3	1.638	18	0.29484	0.4	-0.1052
3DH5	2.888	9	0.25992	0.4	-0.1401


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.




PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3

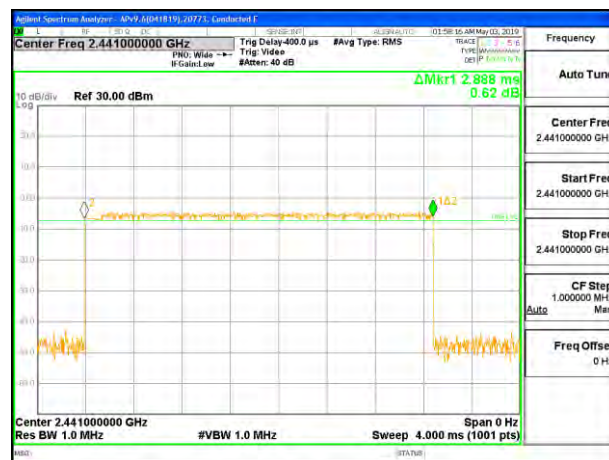


PULSE WIDTH – 3DH5

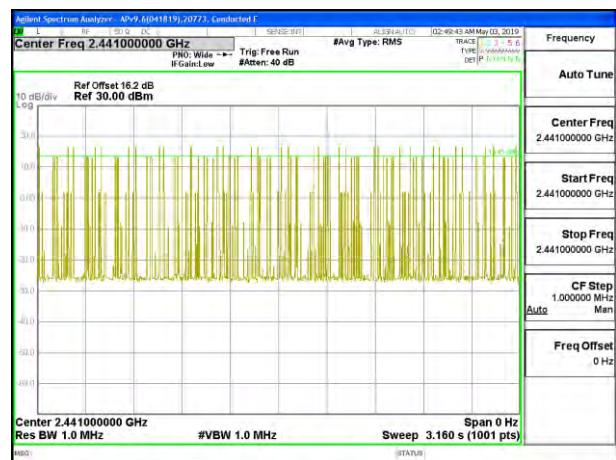

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

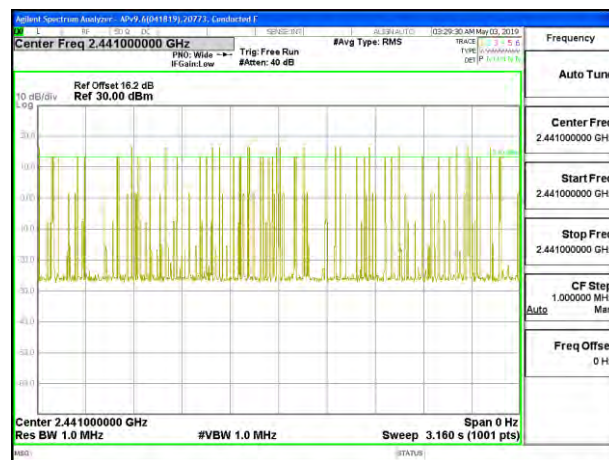

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

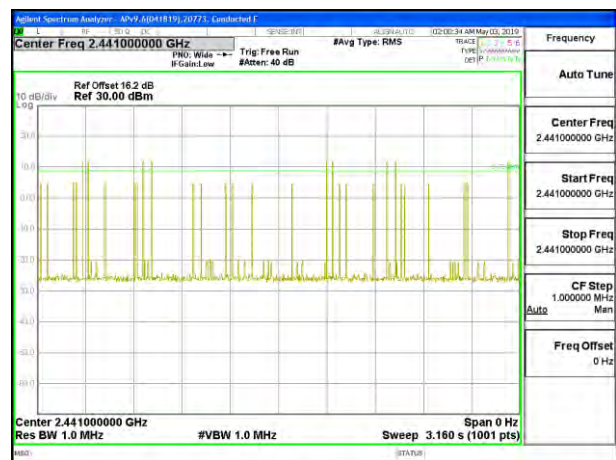


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	32	0.12384	0.4	-0.2762
3DH3	1.638	18	0.29484	0.4	-0.1052
3DH5	2.888	8	0.23104	0.4	-0.169


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

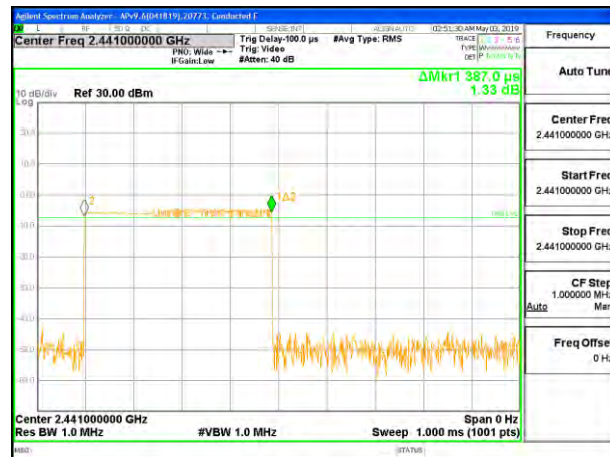

PULSE WIDTH – 3DH1




PULSE WIDTH – 3DH3

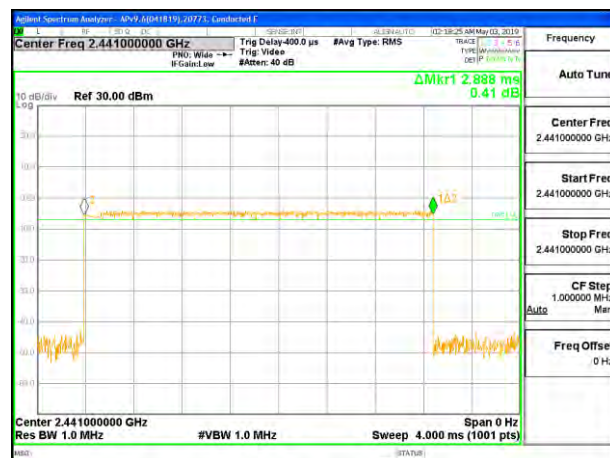

PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

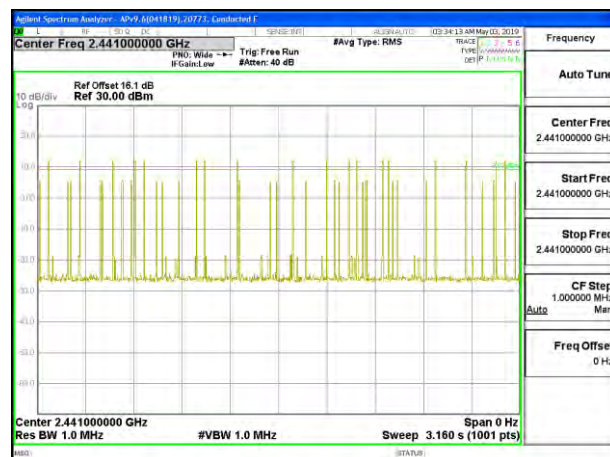

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.9. BEAMFORMING AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

RESULTS

8.9.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	32	0.1219	0.4	-0.2781
DH3	1.636	16	0.2618	0.4	-0.1382
DH5	2.884	5	0.1442	0.4	-0.2558
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	8	0.03048	0.4	-0.3695
DH3	1.636	4	0.06544	0.4	-0.3346
DH5	2.884	1.25	0.03605	0.4	-0.3640

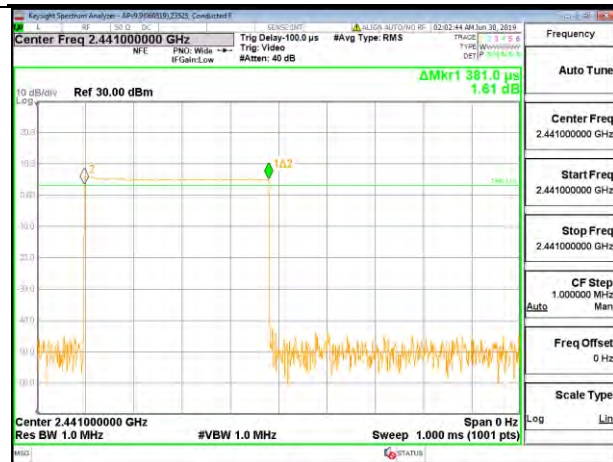


PULSE WIDTH – DH1



PULSE WIDTH – DH3

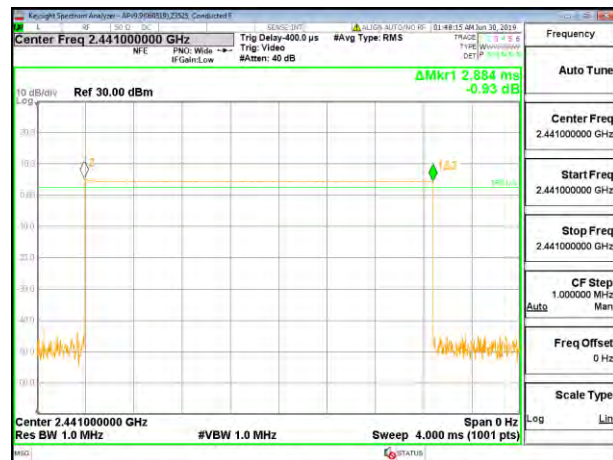


PULSE WIDTH – DH5

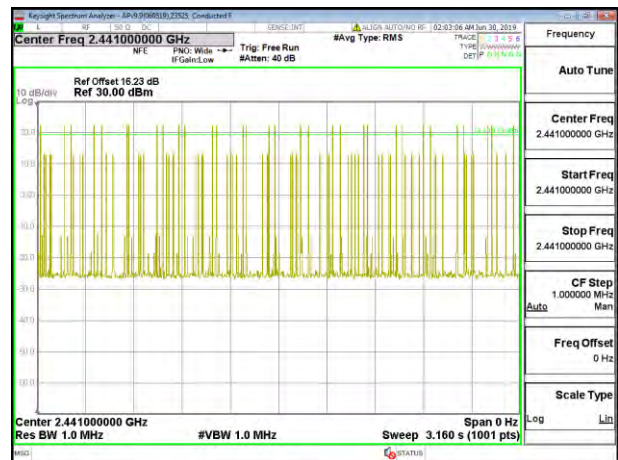

NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1




NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3

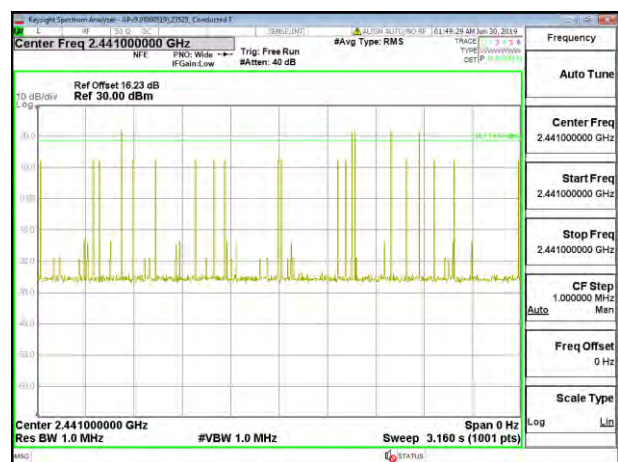

NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5

Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	32	0.1219	0.4	-0.2781
DH3	1.638	17	0.2785	0.4	-0.1215
DH5	2.884	4	0.1154	0.4	-0.2846
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	8	0.03048	0.4	-0.3695
DH3	1.638	4.25	0.06962	0.4	-0.3304
DH5	2.884	1	0.02884	0.4	-0.3712

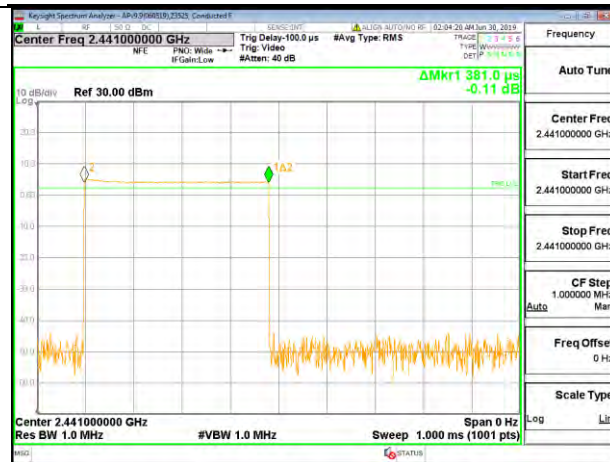

PULSE WIDTH – DH1




PULSE WIDTH – DH3




PULSE WIDTH – DH5



NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1

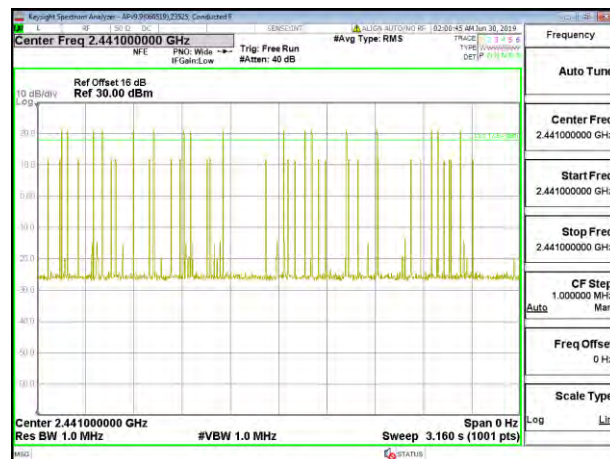

NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3

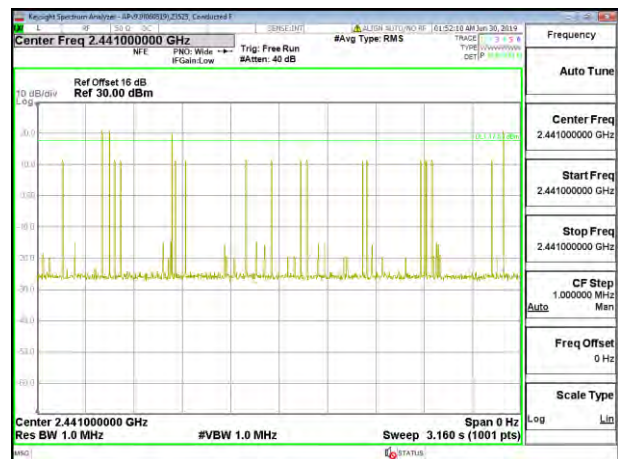

NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5

8.9.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


Antenna 4

	Width (msec)	Pulses in 3.16 seconds	of Occupancy (sec)	(sec)	(sec)
8PSK Normal	Mode				
3DH1	0.381	32	0.12192	0.4	-0.2781
3DH3	1.638	16	0.26208	0.4	-0.1379
3DH5	2.888	5	0.1444	0.4	-0.2556


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.



PULSE WIDTH – 3DH1

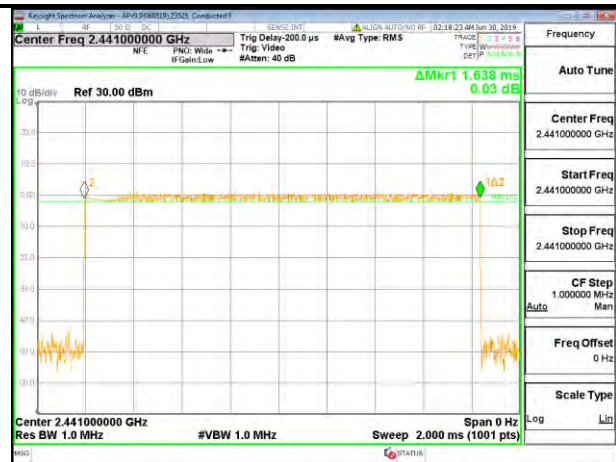

PULSE WIDTH – 3DH3

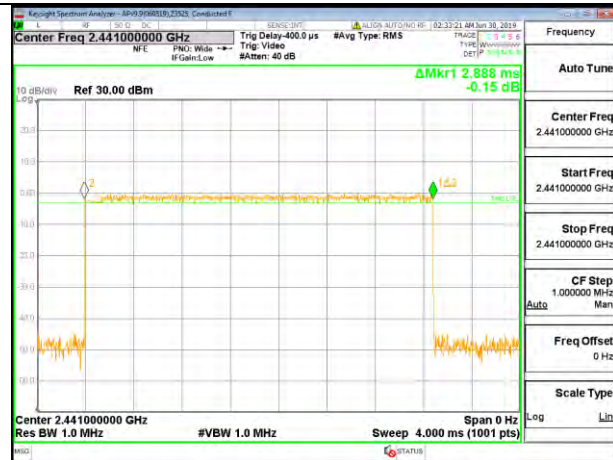

PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**




**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**


Antenna 3

	Width (msec)	Pulses in 3.16 seconds	of Occupancy (sec)	(sec)	(sec)
8PSK Normal Mode					
3DH1	0.381	32	0.12192	0.4	-0.2781
3DH3	1.638	17	0.27846	0.4	-0.1215
3DH5	2.888	5	0.1444	0.4	-0.2556


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

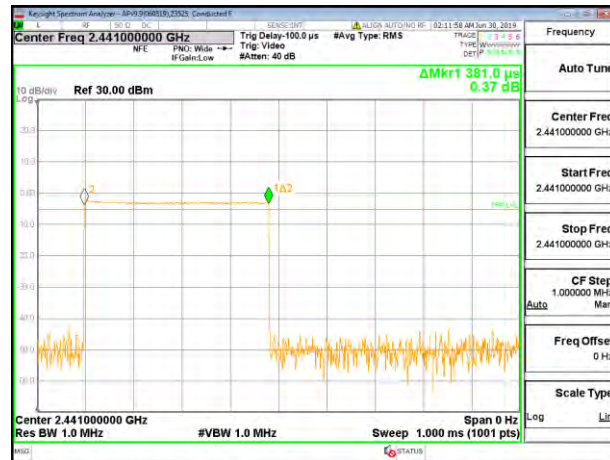


PULSE WIDTH – 3DH1

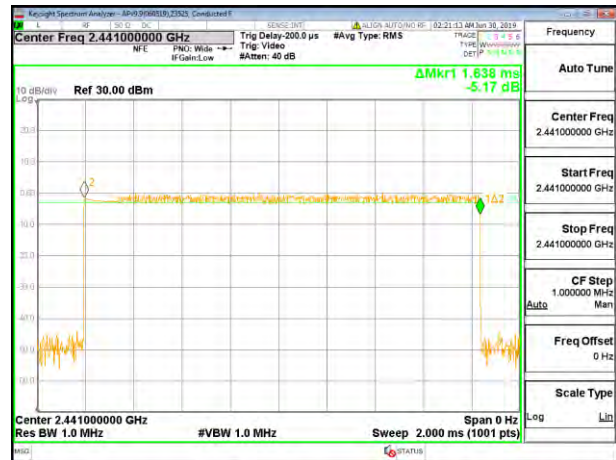


PULSE WIDTH – 3DH3

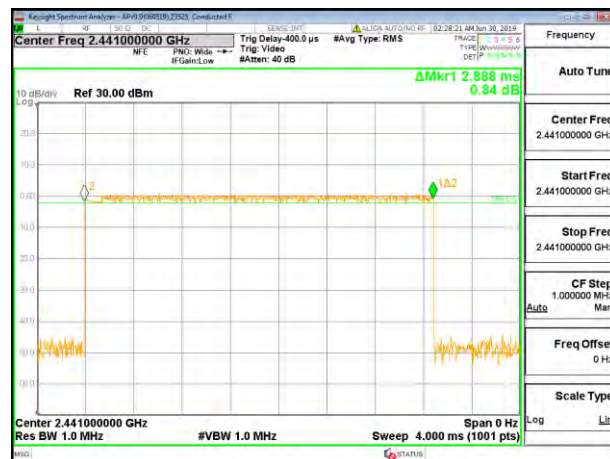


PULSE WIDTH – 3DH5

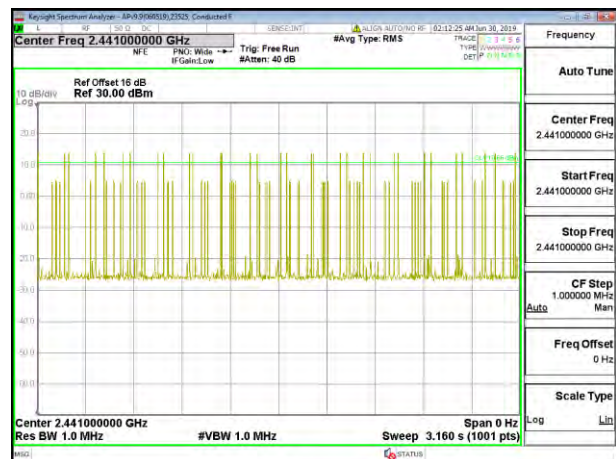

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

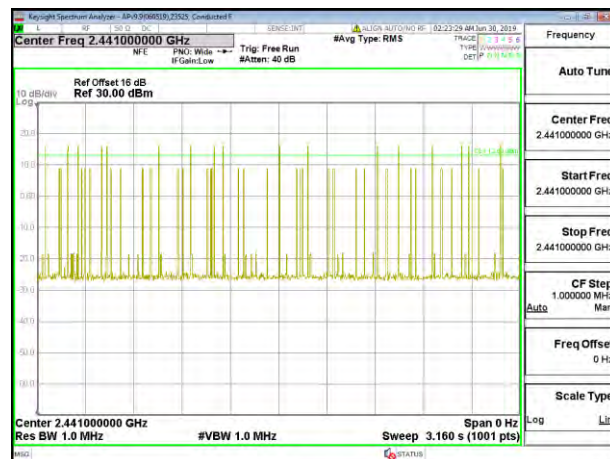

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

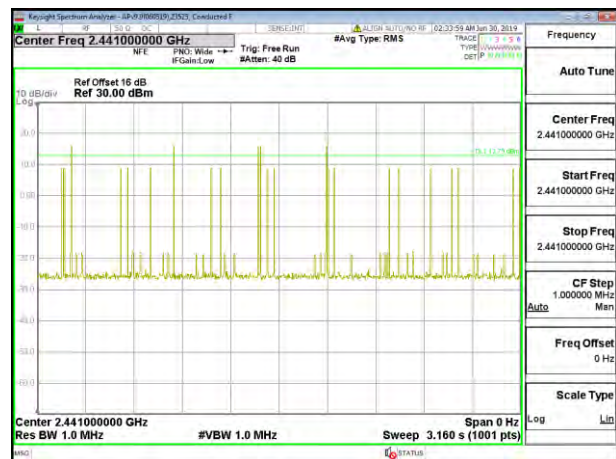


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.9.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.382	32	0.1222	0.4	-0.2778
DH3	1.638	15	0.2457	0.4	-0.1543
DH5	2.884	5	0.1442	0.4	-0.2558
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.382	8	0.03056	0.4	-0.3694
DH3	1.638	3.75	0.06143	0.4	-0.3386
DH5	2.884	1.25	0.03605	0.4	-0.3640

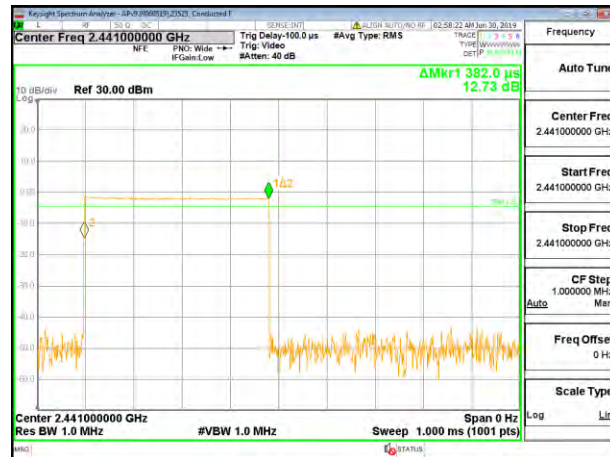


PULSE WIDTH – DH1




PULSE WIDTH – DH3

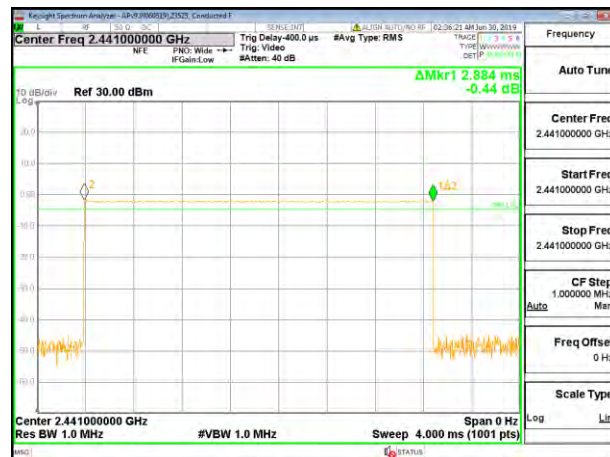


PULSE WIDTH – DH5

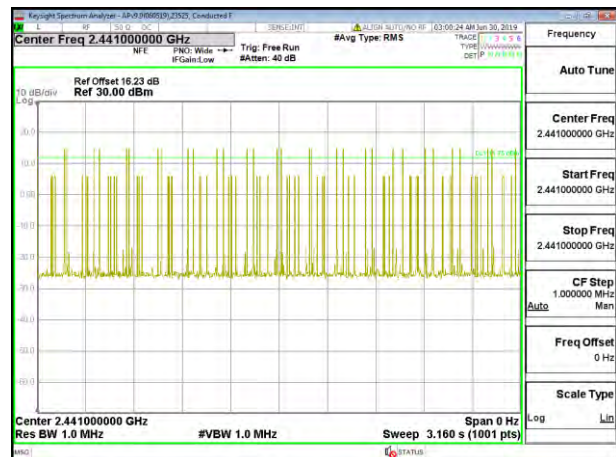

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1**

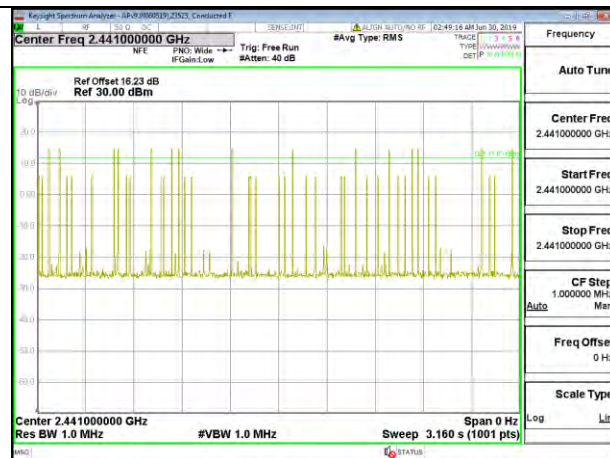


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3**

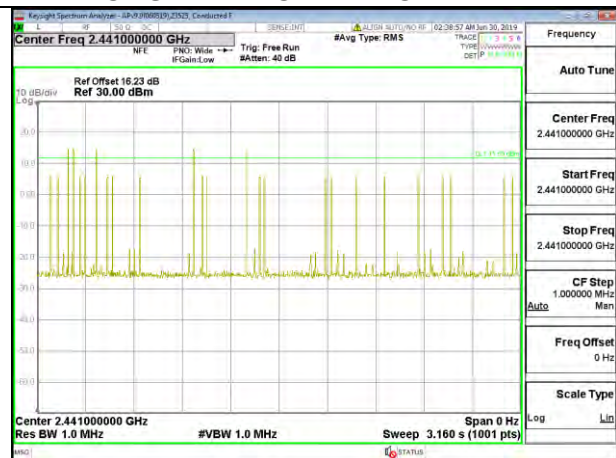

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5**

Antenna 3


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	32	0.1219	0.4	-0.2781
DH3	1.638	16	0.2621	0.4	-0.1379
DH5	2.884	5	0.1442	0.4	-0.2558
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	8	0.03048	0.4	-0.3695
DH3	1.638	4	0.06552	0.4	-0.3345
DH5	2.884	1.25	0.03605	0.4	-0.3640

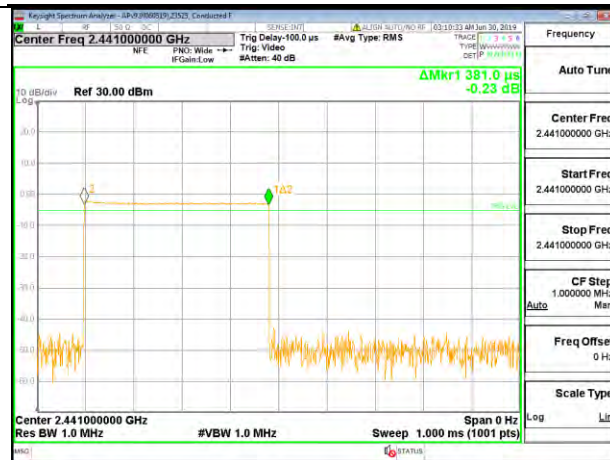

PULSE WIDTH – DH1




PULSE WIDTH – DH3

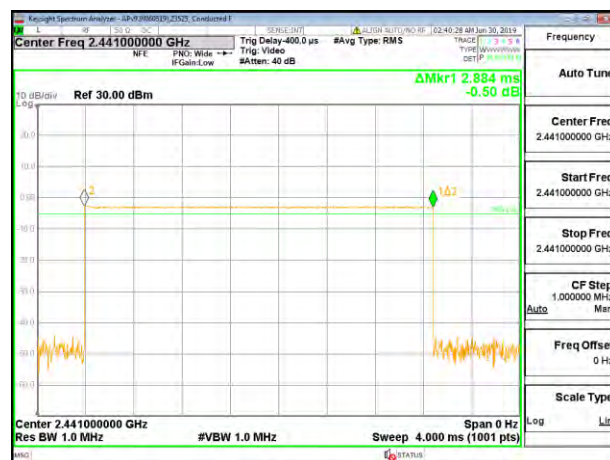


PULSE WIDTH – DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1**

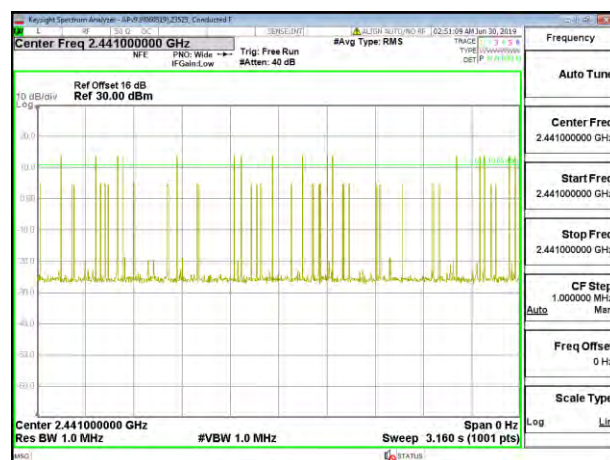

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3**

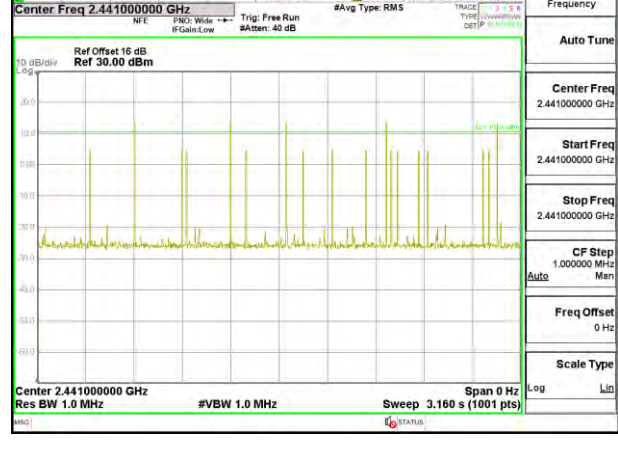


**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5**

8.9.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION


Antenna 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.387	32	0.12384	0.4	-0.2762
3DH3	1.638	17	0.27846	0.4	-0.1215
3DH5	2.888	5	0.1444	0.4	-0.2556


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

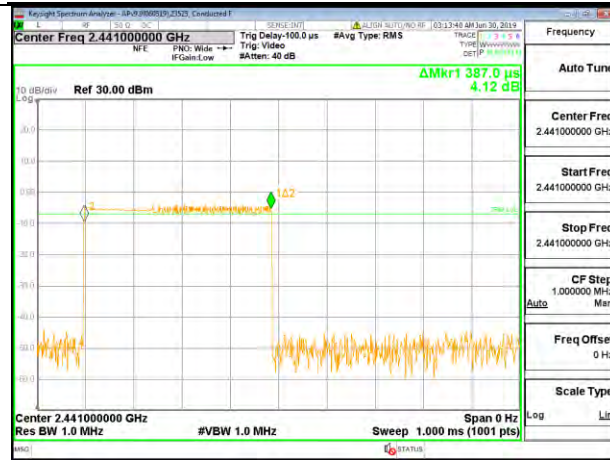

PULSE WIDTH – 3DH1

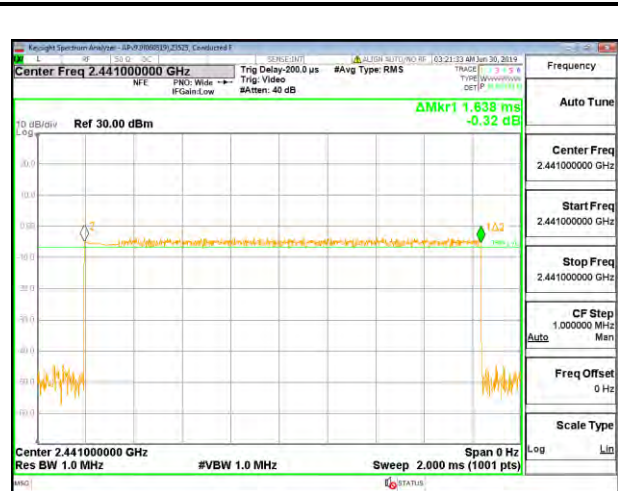


PULSE WIDTH – 3DH3

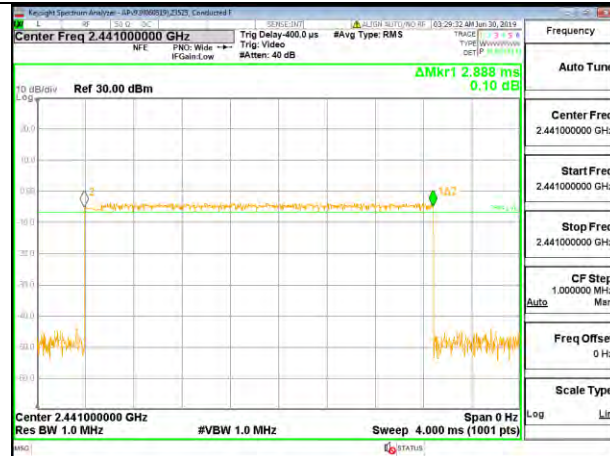

PULSE WIDTH – 3DH5



NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1

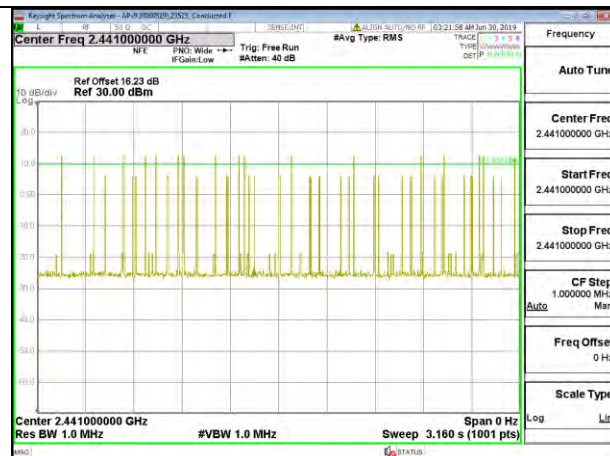

NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3




NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5


Antenna 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
3DH1	0.388	32	0.12416	0.4	-0.2758
3DH3	1.638	17	0.27846	0.4	-0.1215
3DH5	2.888	6	0.17328	0.4	-0.2267


Note: for AFH(8PSK) mode, please refer to the results of AFH(GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

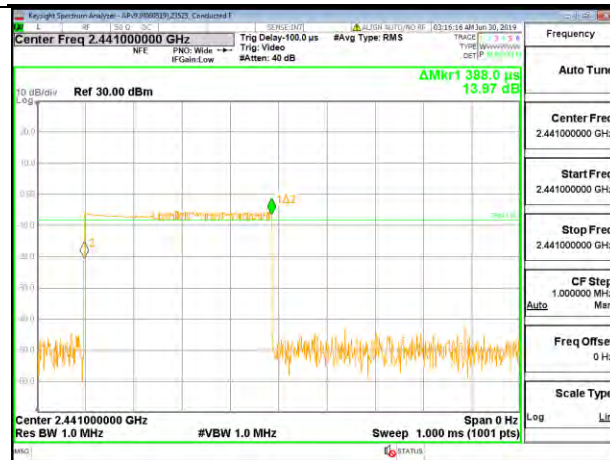

PULSE WIDTH – 3DH1

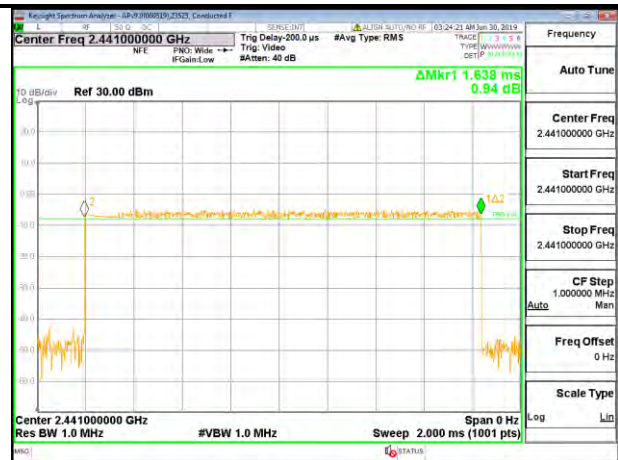


PULSE WIDTH – 3DH3

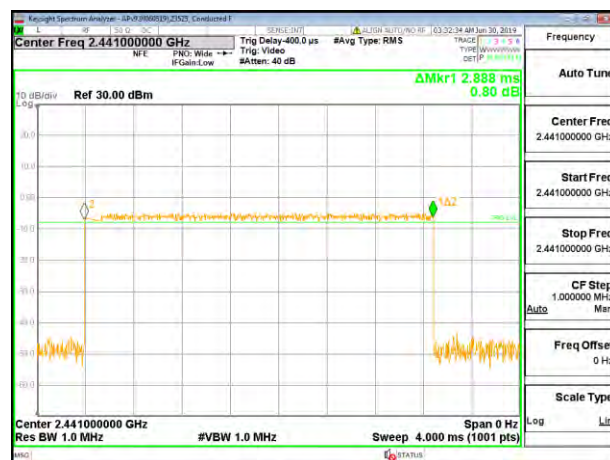


PULSE WIDTH – 3DH5



**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH1**

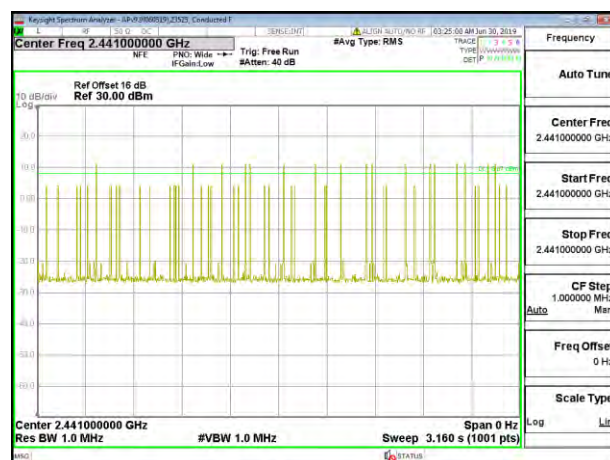

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH3**

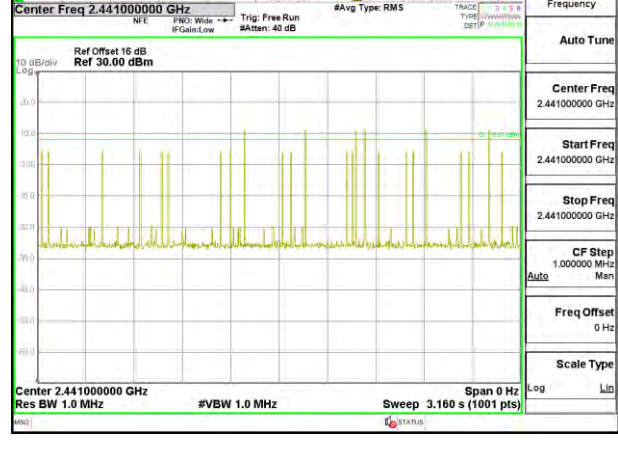

**NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – 3DH5**

8.10. OUTPUT POWER

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS

8.10.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.47	21	-4.53
Middle	2441	16.65	21	-4.35
High	2480	16.51	21	-4.49

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.51	21	-1.49
Middle	2441	19.57	21	-1.43
High	2480	19.53	21	-1.47

8.10.2. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.28	21	-2.72
Middle	2441	18.47	21	-2.53
High	2480	18.36	21	-2.64

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.33	21	-2.67
Middle	2441	18.44	21	-2.56
High	2480	18.39	21	-2.61

8.10.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.48	21	-2.52
Middle	2441	18.54	21	-2.46
High	2480	18.45	21	-2.55

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.47	21	-2.53
Middle	2441	18.51	21	-2.49
High	2480	18.49	21	-2.51

8.10.4. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.46	21	-8.54
Middle	2441	12.58	21	-8.42
High	2480	12.49	21	-8.51

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.51	21	-8.49
Middle	2441	12.57	21	-8.43
High	2480	12.53	21	-8.47

8.10.5. LOW POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.29	21	-9.71
Middle	2441	11.26	21	-9.74
High	2480	11.41	21	-9.59

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.31	21	-9.69
Middle	2441	11.34	21	-9.66
High	2480	11.39	21	-9.61

8.10.6. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.43	21	-9.57
Middle	2441	11.41	21	-9.59
High	2480	11.49	21	-9.51

Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.43	21	-9.57
Middle	2441	11.39	21	-9.61
High	2480	11.44	21	-9.56

8.11. BEAMFORMING OUTPUT POWER

Note: Test procedures and setting on beamforming mode are same as BT basic and EDR mode

8.11.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.62	17.08	19.87	21	-1.13
Middle	2441	16.56	17.02	19.81	21	-1.19
High	2480	16.62	17.11	19.88	21	-1.12

8.11.2. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.45	17.49	20.48	21	-0.52
Middle	2441	17.56	17.58	20.58	21	-0.42
High	2480	17.51	17.54	20.54	21	-0.46

8.11.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.46	17.52	20.50	21	-0.50
Middle	2441	17.61	17.60	20.62	21	-0.38
High	2480	17.55	17.57	20.57	21	-0.43

8.11.4. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.54	12.55	15.56	21	-5.44
Middle	2441	12.57	12.60	15.60	21	-5.40
High	2480	12.56	12.55	15.57	21	-5.43

8.11.5. LOW POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.39	11.42	14.42	21	-6.58
Middle	2441	11.35	11.43	14.40	21	-6.60
High	2480	11.31	11.36	14.35	21	-6.65

8.11.6. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/19/2019

Channel	Frequency (MHz)	Output Power Antenna 4 (dBm)	Output Power Antenna 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.48	11.46	14.48	21	-6.52
Middle	2441	11.42	11.45	14.45	21	-6.55
High	2480	11.47	11.39	14.44	21	-6.56

8.12. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

8.12.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.12
Middle	2441	16.25
High	2480	16.13

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.20
Middle	2441	19.22
High	2480	19.17

8.12.2. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.68
Middle	2441	15.71
High	2480	15.69

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.70
Middle	2441	15.69
High	2480	15.71

8.12.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.72
Middle	2441	15.75
High	2480	15.74

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.71
Middle	2441	15.73
High	2480	15.73

8.12.4. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	12.16
Middle	2441	12.24
High	2480	12.19

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	12.20
Middle	2441	12.23
High	2480	12.21

8.12.5. LOW POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.65
Middle	2441	8.61
High	2480	8.70

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.68
Middle	2441	8.64
High	2480	8.65

8.12.6. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.69
Middle	2441	8.68
High	2480	8.74

Antenna 3

Tested By:	44373
Date	7/17/2019

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.70
Middle	2441	8.72
High	2480	8.69

8.13. BEAMFORMING AVERAGE POWER

8.13.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	16.24	16.64	19.45
Middle	2441	16.19	16.67	19.45
High	2480	16.25	16.70	19.49

8.13.2. HIGH POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	14.68	14.69	17.70
Middle	2441	14.70	14.71	17.72
High	2480	14.69	14.70	17.71

8.13.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	14.71	14.72	17.73
Middle	2441	14.74	14.75	17.76
High	2480	14.73	14.72	17.74

8.13.4. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	12.22	12.21	15.23
Middle	2441	12.18	12.20	15.20
High	2480	12.24	12.23	15.25

8.13.5. LOW POWER ENHANCED DATA RATE QPSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	8.63	8.65	11.65
Middle	2441	8.52	8.61	11.58
High	2480	8.62	8.66	11.65

8.13.6. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4 + Antenna 3

Tested By:	44373
Date:	7/17/2019

Channel	Frequency (MHz)	Average Power Antenna 4 (dBm)	Average Power Antenna 3 (dBm)	Total Power (dBm)
Low	2402	8.73	8.72	11.74
Middle	2441	8.69	8.73	11.72
High	2480	8.75	8.69	11.73

8.14. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS