



ANT M2, 100 MHz, MIMO, 3CC, QPSK

Low-side, Single RB

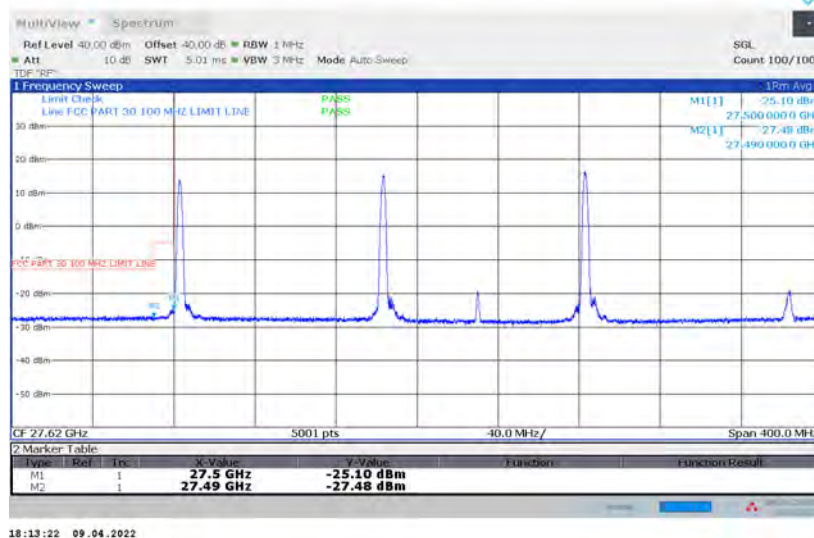


Low-side, Full RB

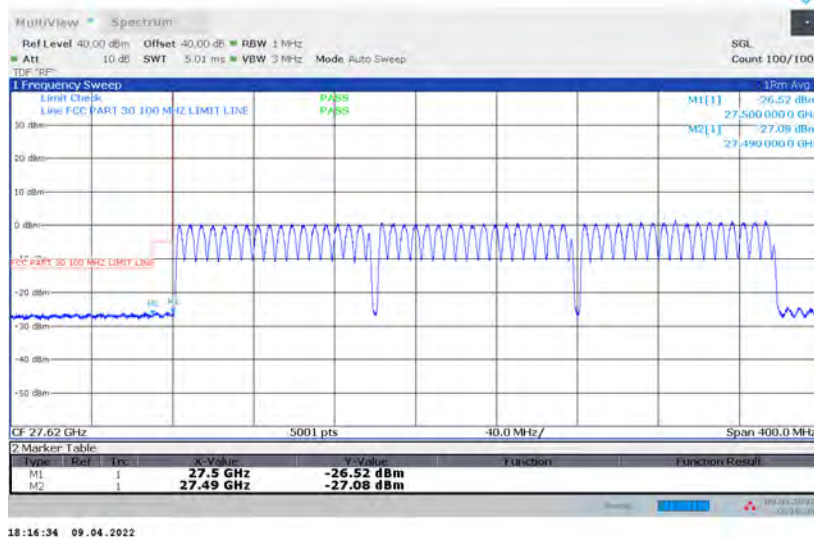


ANT M2, 100 MHz, MIMO, 3CC, QPSK

High-side, Single RB

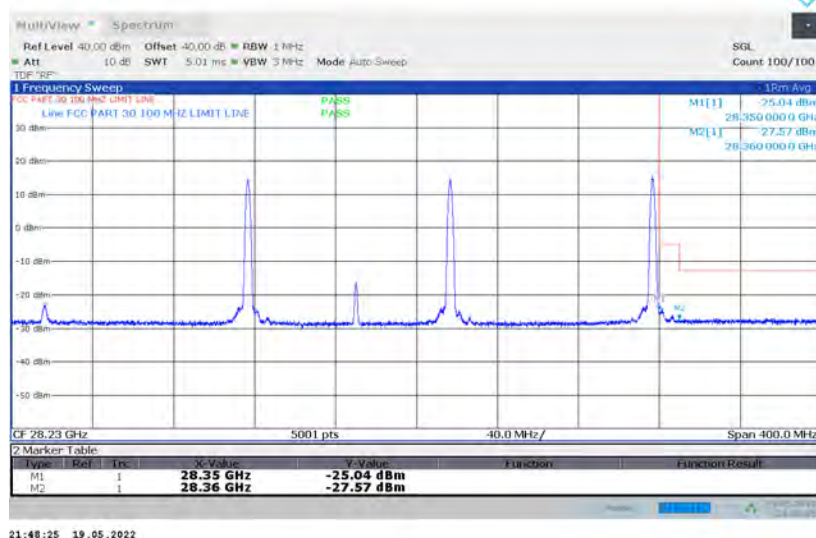

High-side, Full RB

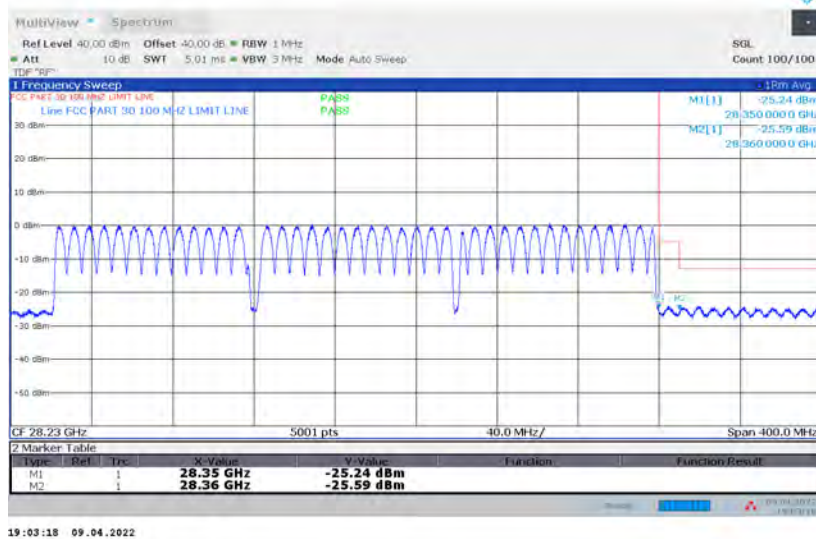


ANT M1, M2 & M3, 100 MHz, MIMO, 3CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-27.14	-5	-22.14
				27.49	-28.24	-13	-15.24
M2				27.5	-25.10	-5	-20.10
				27.49	-27.48	-13	-14.48
M3				27.5	-27.15	-5	-22.15
				27.49	-28.83	-13	-15.83
M1	100	L	66/0	27.5	-29.09	-5	-24.09
				27.49	-29.25	-13	-16.25
M2				27.5	-26.52	-5	-21.52
				27.49	-27.08	-13	-14.08
M3				27.5	-27.72	-5	-22.72
				27.49	-28.16	-13	-15.16
M1	100	H	1/65	28.35	-27.24	-5	-22.24
				28.36	-27.65	-13	-14.65
M2				28.35	-25.04	-5	-20.04
				28.36	-27.57	-13	-14.57
M3				28.35	-26.97	-5	-21.97
				28.36	-27.76	-13	-14.76
M1	100	H	66/0	28.35	-27.56	-5	-22.56
				28.36	-26.78	-13	-13.78
M2				28.35	-25.24	-5	-20.24
				28.36	-25.59	-13	-12.59
M3				28.35	-26.26	-5	-21.26
				28.36	-27.53	-13	-14.53


8.3.24. BAND EDGE n261 MIMO 4CC

ANT M2, 50 MHz, MIMO, 4CC, QPSK

Low-side, Single RB

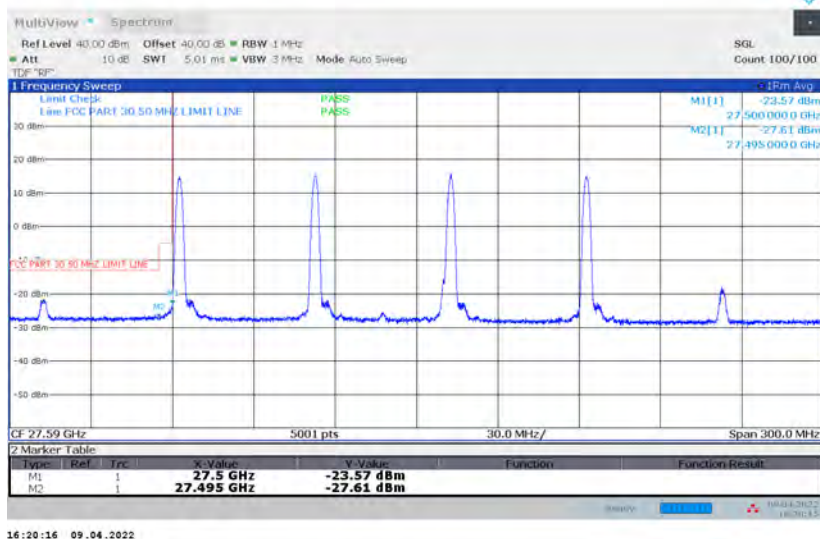


Low-side, Full RB

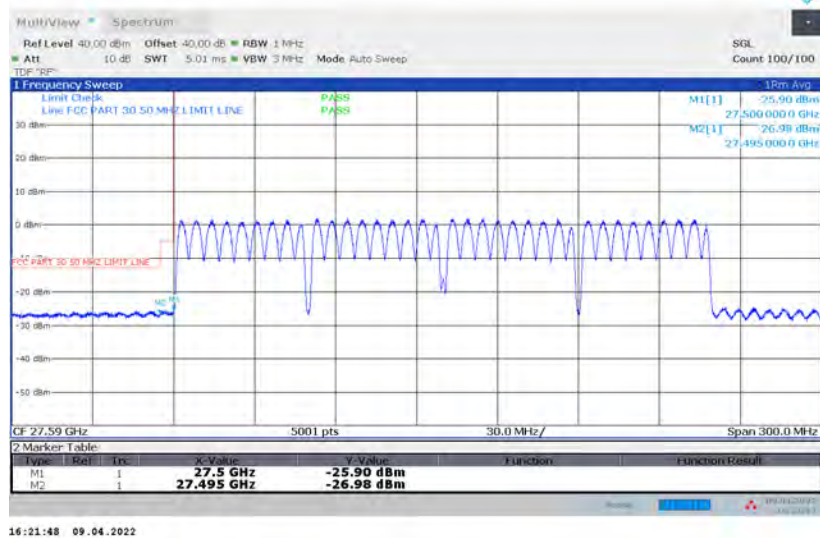


ANT M2, 50 MHz, MIMO, 4CC, QPSK

High-side, Single RB

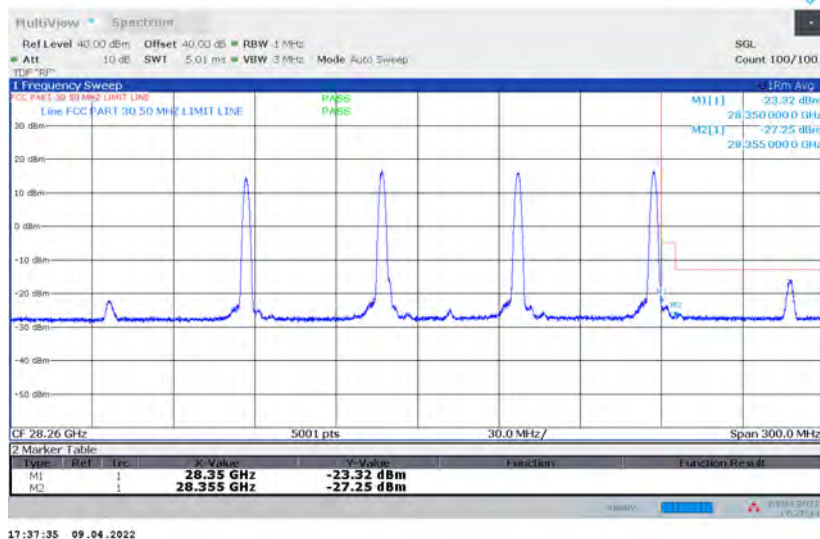

High-side, Full RB

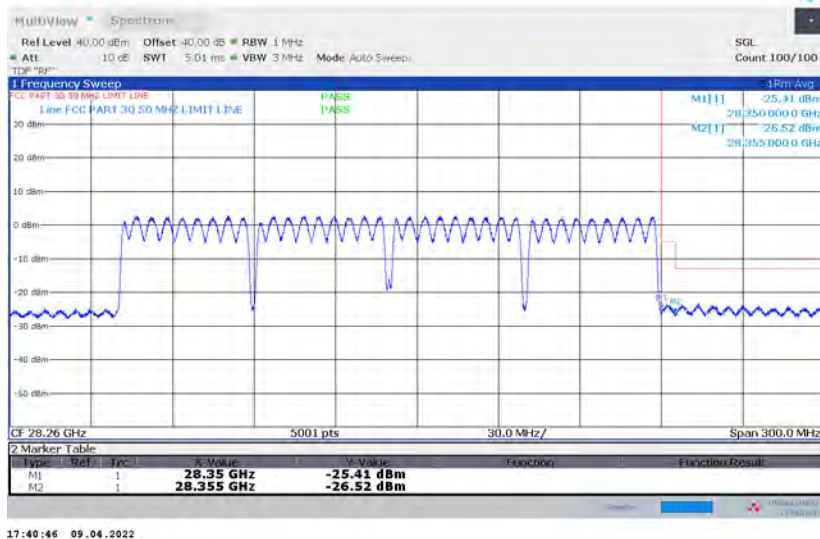


ANT M1, M2 & M3, 50 MHz, MIMO, 4CC, QPSK


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	27.5	-27.08	-5	-22.08
				27.495	-28.50	-13	-15.50
M2				27.5	-23.57	-5	-18.57
				27.495	-27.61	-13	-14.61
M3				27.5	-23.28	-5	-18.28
				27.495	-28.59	-13	-15.59
M1	50	L	32/0	27.5	-28.58	-5	-23.58
				27.495	-28.94	-13	-15.94
M2				27.5	-25.90	-5	-20.90
				27.495	-26.98	-13	-13.98
M3				27.5	-26.98	-5	-21.98
				27.495	-27.06	-13	-14.06
M1	50	H	1/31	28.35	-26.19	-5	-21.19
				28.355	-28.19	-13	-15.19
M2				28.35	-23.32	-5	-18.32
				28.355	-27.25	-13	-14.25
M3				28.35	-23.28	-5	-18.28
				28.355	-27.50	-13	-14.50
M1	50	H	32/0	28.35	-28.66	-5	-23.66
				28.355	-28.15	-13	-15.15
M2				28.35	-25.41	-5	-20.41
				28.355	-26.52	-13	-13.52
M3				28.35	-26.43	-5	-21.43
				28.355	-27.20	-13	-14.20

ANT M2, 100 MHz, MIMO, 4CC, QPSK

Low-side, Single RB

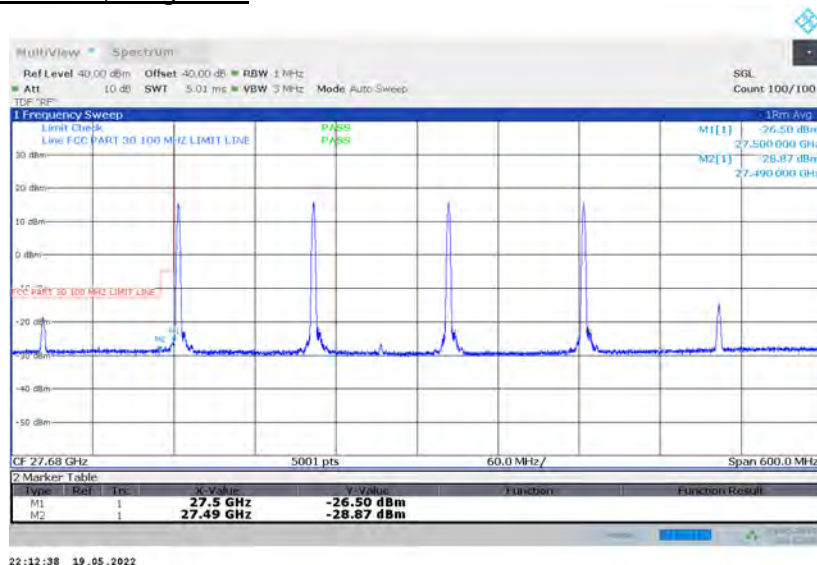


Low-side, Full RB

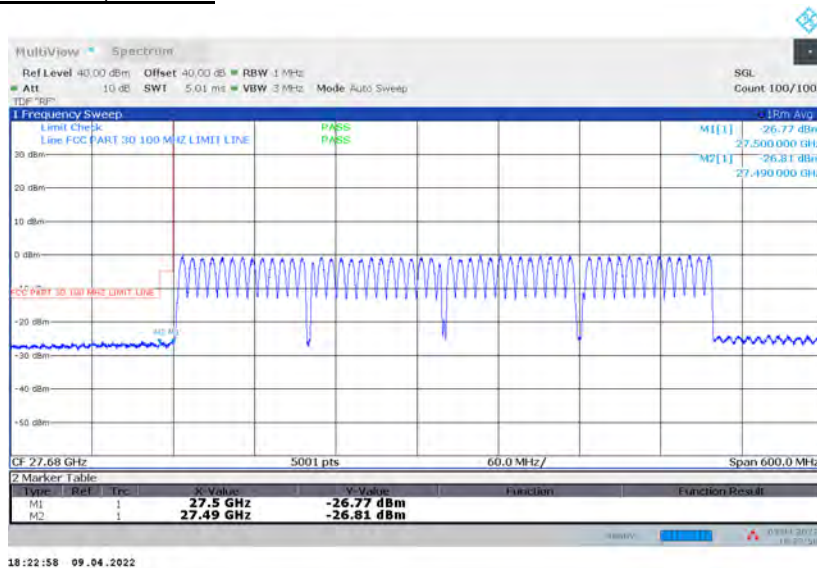

ANT M2, 100 MHz, MIMO, 4CC, QPSK

High-side, Single RB

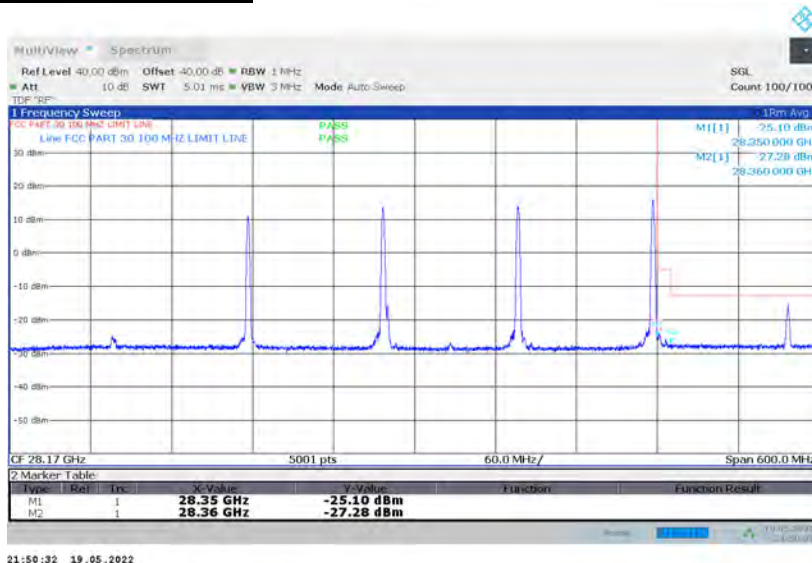

High-side, Full RB




ANT M1, M2 & M3, 100 MHz, MIMO, 4CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	27.5	-27.83	-5	-22.83
				27.49	-28.28	-13	-15.28
M2				27.5	-26.50	-5	-21.50
				27.49	-28.87	-13	-15.87
M3				27.5	-24.78	-5	-19.78
				27.49	-28.85	-13	-15.85
M1	100	L	66/0	27.5	-28.67	-5	-23.67
				27.49	-28.84	-13	-15.84
M2				27.5	-26.77	-5	-21.77
				27.49	-26.81	-13	-13.81
M3				27.5	-27.63	-5	-22.63
				27.49	-28.23	-13	-15.23
M1	100	H	1/65	28.35	-26.18	-5	-21.18
				28.36	-27.93	-13	-14.93
M2				28.35	-25.10	-5	-20.10
				28.36	-27.28	-13	-14.28
M3				28.35	-24.81	-5	-19.81
				28.36	-27.51	-13	-14.51
M1	100	H	66/0	28.35	-27.47	-5	-22.47
				28.36	-27.47	-13	-14.47
M2				28.35	-25.72	-5	-20.72
				28.36	-26.70	-13	-13.70
M3				28.35	-27.17	-5	-22.17
				28.36	-27.26	-13	-14.26


8.3.25. BAND EDGE n260 SISO-DUAL 1CC

ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

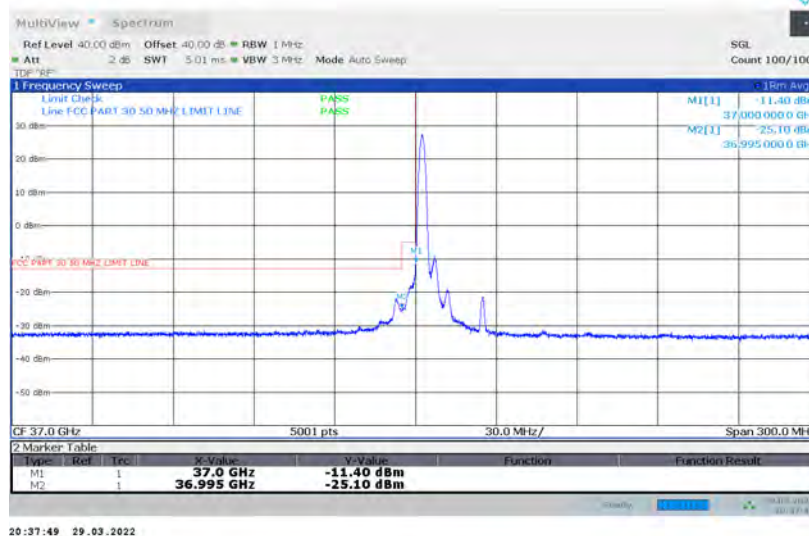


Low-side, Full RB

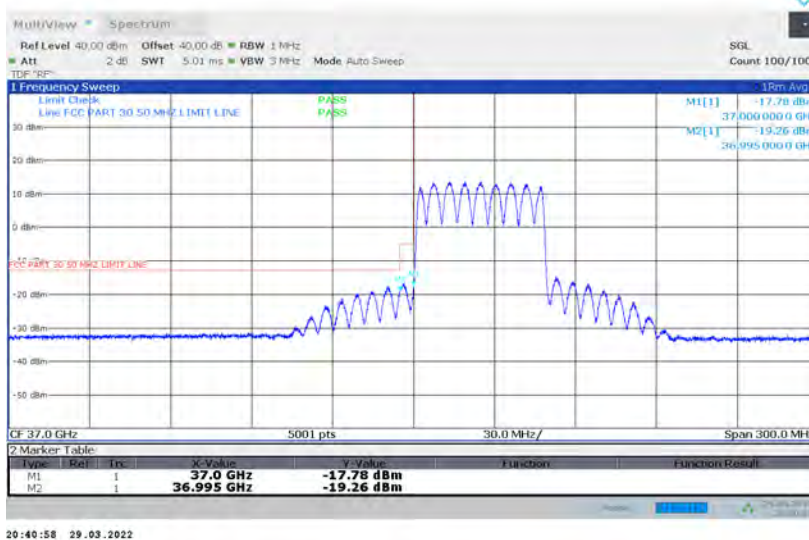


ANT M2, 50 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

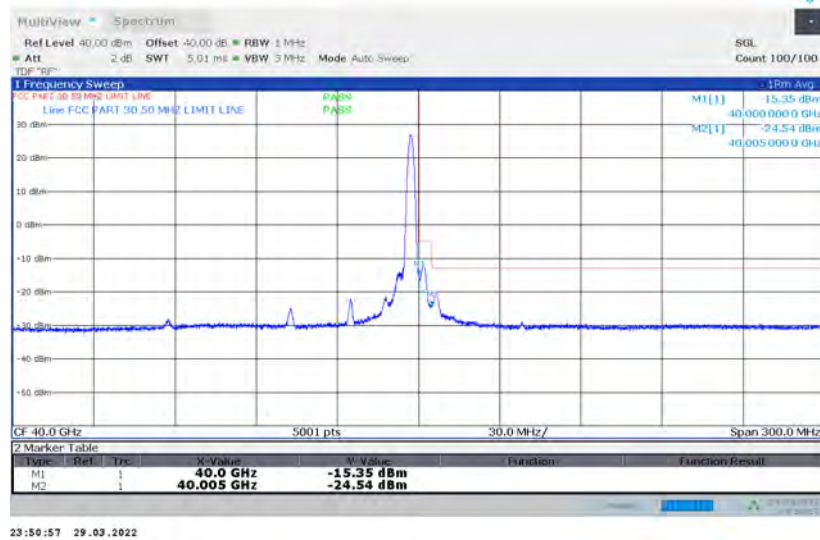

High-side, Full RB

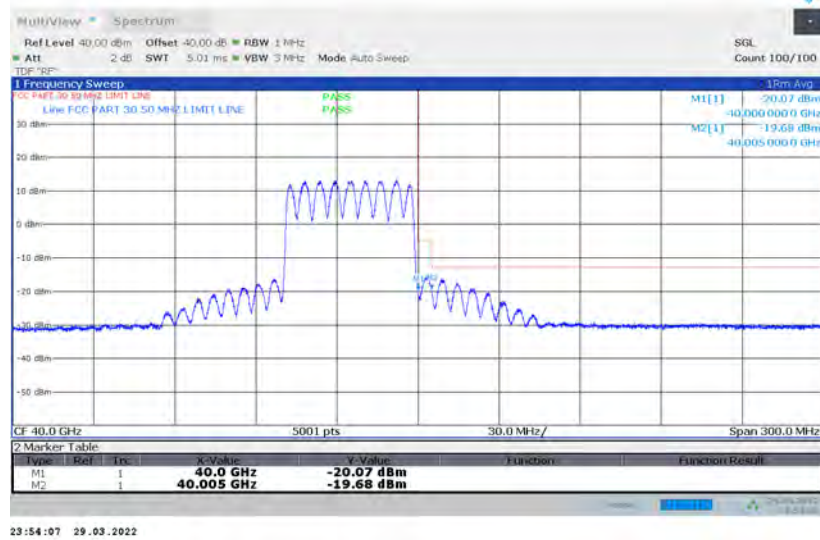

ANT M1, M2 & M3, 50 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-22.04	-5	-17.04
				36.995	-29.76	-13	-16.76
M2				37	-11.40	-5	-6.40
				36.995	-25.10	-13	-12.10
M3				37	-9.88	-5	-4.88
				36.995	-20.37	-13	-7.37
M1	50	L	32/0	37	-29.39	-5	-24.39
				36.995	-29.85	-13	-16.85
M2				37	-17.78	-5	-12.78
				36.995	-19.26	-13	-6.26
M3				37	-15.93	-5	-10.93
				36.995	-14.86	-13	-1.86
M1	50	H	1/31	40	-23.49	-5	-18.49
				40.005	-27.14	-13	-14.14
M2				40	-15.35	-5	-10.35
				40.005	-24.54	-13	-11.54
M3				40	-13.17	-5	-8.17
				40.005	-21.78	-13	-8.78
M1	50	H	32/0	40	-27.11	-5	-22.11
				40.005	-26.61	-13	-13.61
M2				40	-20.07	-5	-15.07
				40.005	-19.68	-13	-6.68
M3				40	-17.63	-5	-12.63
				40.005	-16.06	-13	-3.06

ANT M2 & M3, 50 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-12.13	-5	-7.13
				36.995	-25.65	-13	-12.65
M3				37	-11.14	-5	-6.14
				36.995	-20.44	-13	-7.44
M2	50	L	32/0	37	-21.17	-5	-16.17
				36.995	-23.60	-13	-10.60
M3				37	-17.47	-5	-12.47
				36.995	-18.00	-13	-5.00
M2	50	H	1/31	40	-14.81	-5	-9.81
				40.005	-24.10	-13	-11.10
M3				40	-13.96	-5	-8.96
				40.005	-21.71	-13	-8.71
M2	50	H	32/0	40	-22.48	-5	-17.48
				40.005	-24.44	-13	-11.44
M3				40	-18.71	-5	-13.71
				40.005	-18.19	-13	-5.19

ANT M2 & M3, 50 MHz, SISO-DUAL, 1CC, 16QAM


Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M2	50	L	1/0	37	-14.57	-5	-9.57
				36.995	-26.81	-13	-13.81
M3				37	-12.81	-5	-7.81
				36.995	-19.86	-13	-6.86
M2	50	L	32/0	37	-22.45	-5	-17.45
				36.995	-22.95	-13	-9.95
M3				37	-17.89	-5	-12.89
				36.995	-18.19	-13	-5.19
M2	50	H	1/31	40	-15.83	-5	-10.83
				40.005	-25.71	-13	-12.71
M3				40	-16.62	-5	-11.62
				40.005	-22.58	-13	-9.58
M2	50	H	32/0	40	-24.12	-5	-19.12
				40.005	-23.57	-13	-10.57
M3				40	-20.37	-5	-15.37
				40.005	-19.48	-13	-6.48

ANT M2 & M3, 50 MHz, SISO-DUAL, 1CC, 64QAM


Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M2	50	L	1/0	37	-16.32	-5	-11.32
				36.995	-26.82	-13	-13.82
M3				37	-14.93	-5	-9.93
				36.995	-20.63	-13	-7.63
M2	50	L	32/0	37	-25.86	-5	-20.86
				36.995	-29.24	-13	-16.24
M3				37	-19.44	-5	-14.44
				36.995	-20.50	-13	-7.50
M2	50	H	1/31	40	-18.18	-5	-13.18
				40.005	-26.42	-13	-13.42
M3				40	-17.01	-5	-12.01
				40.005	-22.24	-13	-9.24
M2	50	H	32/0	40	-26.52	-5	-21.52
				40.005	-28.58	-13	-15.58
M3				40	-21.85	-5	-16.85
				40.005	-22.10	-13	-9.10

ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

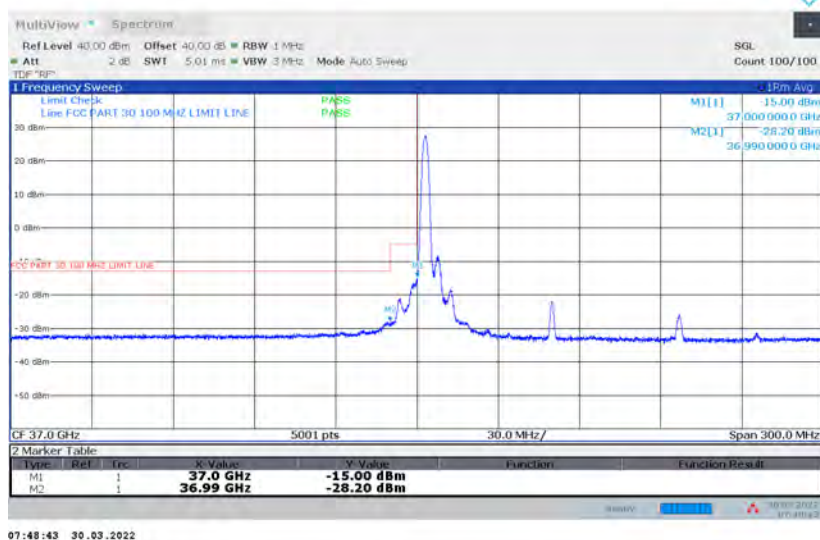


Low-side, Full RB

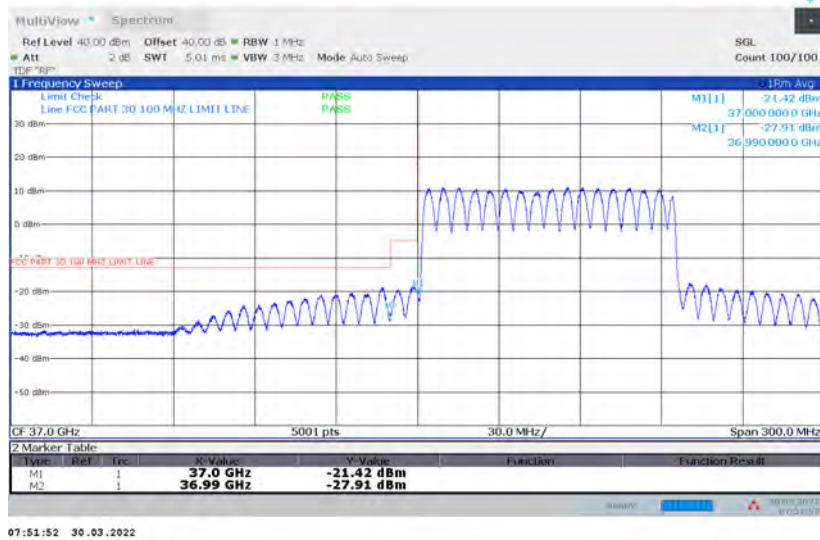


ANT M2, 100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

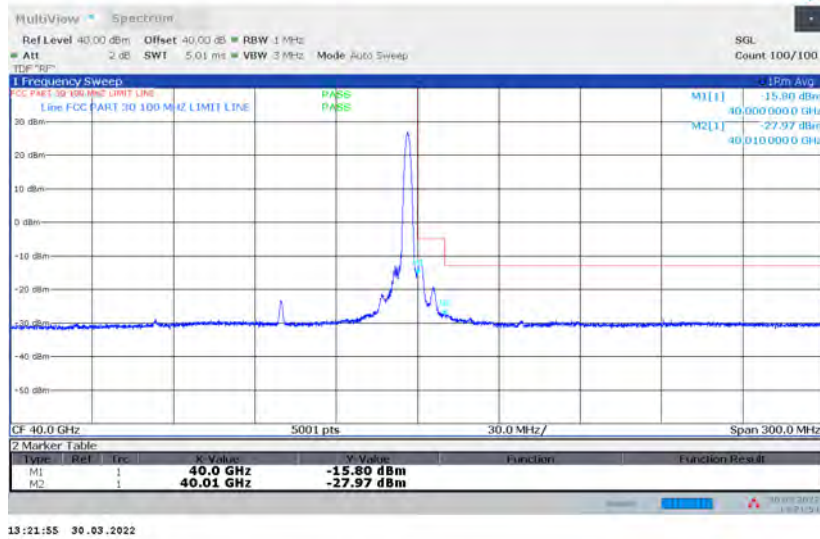

High-side, Full RB

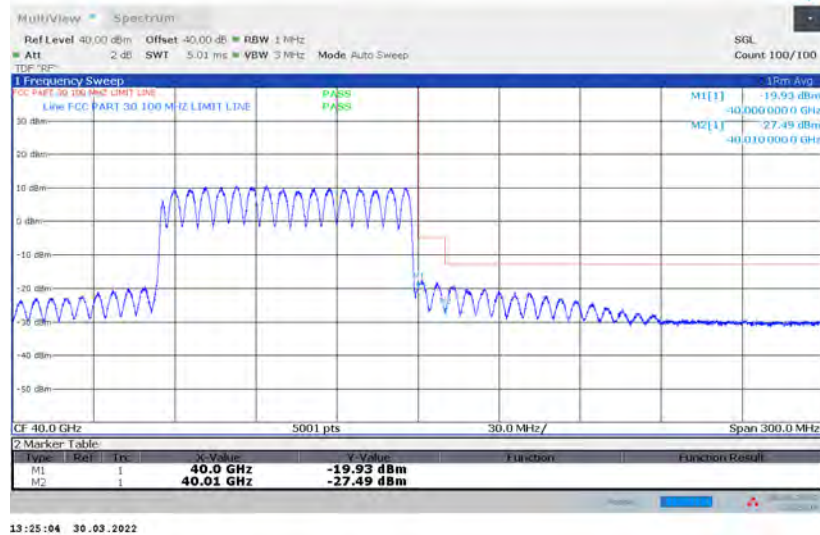

ANT M1, M2 & M3, 100 MHz, SISO-DUAL, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-25.88	-5	-20.88
				36.99	-31.24	-13	-18.24
M2				37	-15.00	-5	-10.00
				36.99	-28.20	-13	-15.20
M3				37	-13.58	-5	-8.58
				36.99	-20.41	-13	-7.41
M1	100	L	64/0	37	-29.26	-5	-24.26
				36.99	-29.37	-13	-16.37
M2				37	-21.42	-5	-16.42
				36.99	-27.91	-13	-14.91
M3				37	-17.29	-5	-12.29
				36.99	-19.33	-13	-6.33
M1	100	H	1/65	40	-22.76	-5	-17.76
				40.01	-27.55	-13	-14.55
M2				40	-15.80	-5	-10.80
				40.01	-27.97	-13	-14.97
M3				40	-15.56	-5	-10.56
				40.01	-22.59	-13	-9.59
M1	100	H	64/2	40	-26.65	-5	-21.65
				40.01	-27.33	-13	-14.33
M2				40	-19.93	-5	-14.93
				40.01	-27.49	-13	-14.49
M3				40	-16.82	-5	-11.82
				40.01	-19.15	-13	-6.15

ANT M2 & M3, 100 MHz, SISO-DUAL, 1CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	100	L	64/0	37	-24.51	-5	-19.51
				36.99	-29.20	-13	-16.20
M3				37	-19.18	-5	-14.18
				36.99	-20.60	-13	-7.60
M2	100	H	64/2	40	-21.84	-5	-16.84
				40.01	-29.52	-13	-16.52
M3				40	-18.86	-5	-13.86
				40.01	-20.79	-13	-7.79

ANT M2 & M3, 100 MHz, SISO-DUAL, 1CC, 16QAM

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M2	100	L	64/0	37	-25.68	-5	-20.68
				36.99	-30.94	-13	-17.94
M3				37	-19.73	-5	-14.73
				36.99	-19.63	-13	-6.63
M2	100	H	64/2	40	-22.85	-5	-17.85
				40.01	-28.95	-13	-15.95
M3				40	-22.52	-5	-17.52
				40.01	-22.12	-13	-9.12


ANT M2 & M3, 100 MHz, SISO-DUAL, 1CC, 64QAM

Antenna	BW (MHz)	Channel	RB (Size Offset)	Freq. (GHz)	Avg EIRP (dBm)	Avg TRP Limit (dBm)	Margin (dB)
M2	100	L	64/0	37	-28.52	-5	-23.52
				36.99	-31.73	-13	-18.73
M3				37	-19.99	-5	-14.99
				36.99	-20.80	-13	-7.80
M2	100	H	64/2	40	-25.95	-5	-20.95
				40.01	-29.96	-13	-16.96
M3				40	-20.33	-5	-15.33
				40.01	-21.10	-13	-8.10


8.3.26. BAND EDGE n260 SISO-DUAL 2CC

ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK

Low-side, Single RB

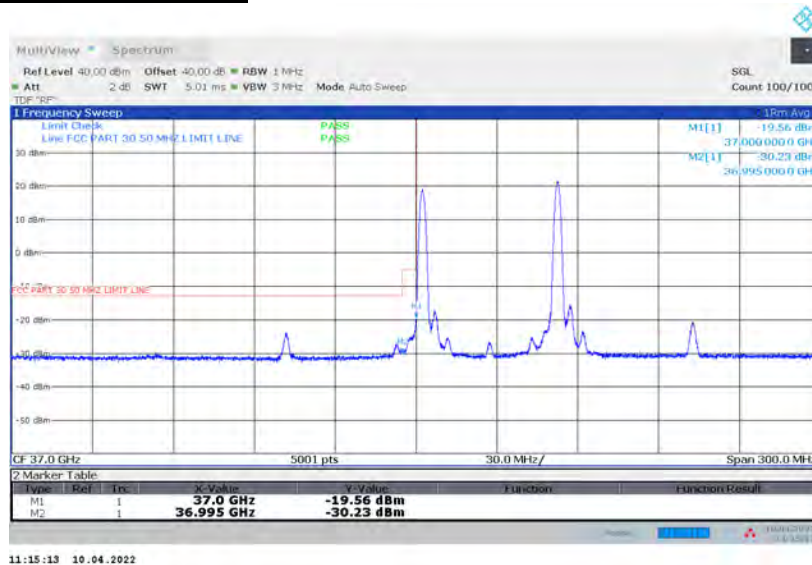


Low-side, Full RB

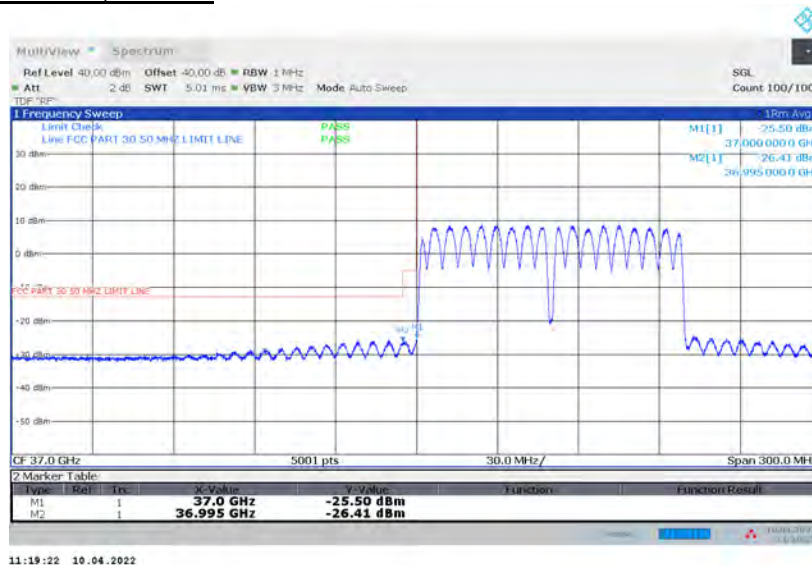


ANT M2, 50 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

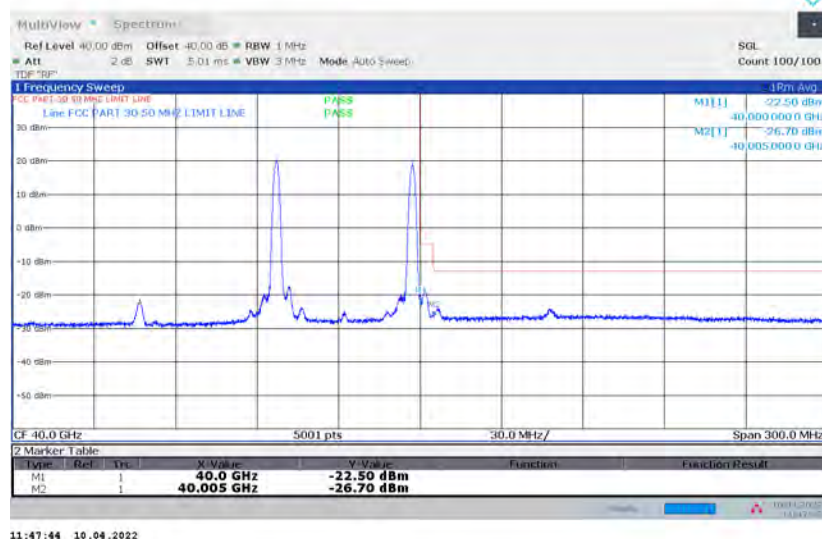

High-side, Full RB

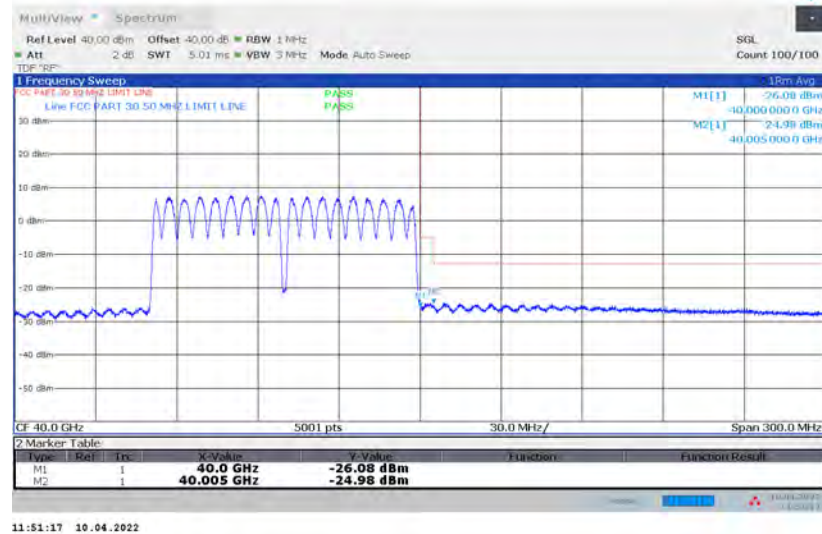

ANT M1, M2 & M3, 50 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-27.71	-5	-22.71
				36.995	-32.44	-13	-19.44
M2				37	-19.56	-5	-14.56
				36.995	-30.23	-13	-17.23
M3				37	-22.38	-5	-17.38
				36.995	-32.25	-13	-19.25
M1	50	L	32/0	37	-31.13	-5	-26.13
				36.995	-32.53	-13	-19.53
M2				37	-25.50	-5	-20.50
				36.995	-26.41	-13	-13.41
M3				37	-27.32	-5	-22.32
				36.995	-29.17	-13	-16.17
M1	50	H	1/31	40	-27.85	-5	-22.85
				40.005	-30.54	-13	-17.54
M2				40	-22.50	-5	-17.50
				40.005	-26.70	-13	-13.70
M3				40	-25.06	-5	-20.06
				40.005	-29.90	-13	-16.90
M1	50	H	32/0	40	-29.62	-5	-24.62
				40.005	-30.35	-13	-17.35
M2				40	-26.08	-5	-21.08
				40.005	-24.98	-13	-11.98
M3				40	-27.96	-5	-22.96
				40.005	-27.60	-13	-14.60

ANT M2 & M3, 50 MHz, SISO-DUAL, 2CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-19.17	-5	-14.17
				36.995	-29.67	-13	-16.67
M3				37	-24.34	-5	-19.34
				36.995	-31.20	-13	-18.20
M2	50	H	1/31	40	-22.54	-5	-17.54
				40.005	-26.02	-13	-13.02
M3				40	-26.16	-5	-21.16
				40.005	-29.86	-13	-16.86

ANT M2 & M3, 50 MHz, SISO-DUAL, 2CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-21.47	-5	-16.47
				36.995	-29.29	-13	-16.29
M3				37	-23.35	-5	-18.35
				36.995	-31.96	-13	-18.96
M2	50	H	1/31	40	-24.04	-5	-19.04
				40.005	-26.96	-13	-13.96
M3				40	-26.10	-5	-21.10
				40.005	-30.02	-13	-17.02

ANT M2 & M3, 50 MHz, SISO-DUAL, 2CC, 64QAM

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-20.28	-5	-15.28
M3				36.995	-29.43	-13	-16.43
				37	-24.38	-5	-19.38
				36.995	-32.47	-13	-19.47
M2	50	H	1/31	40	-24.04	-5	-19.04
M3				40.005	-26.96	-13	-13.96
				40	-24.41	-5	-19.41
				40.005	-30.05	-13	-17.05

ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

Low-side, Single RB

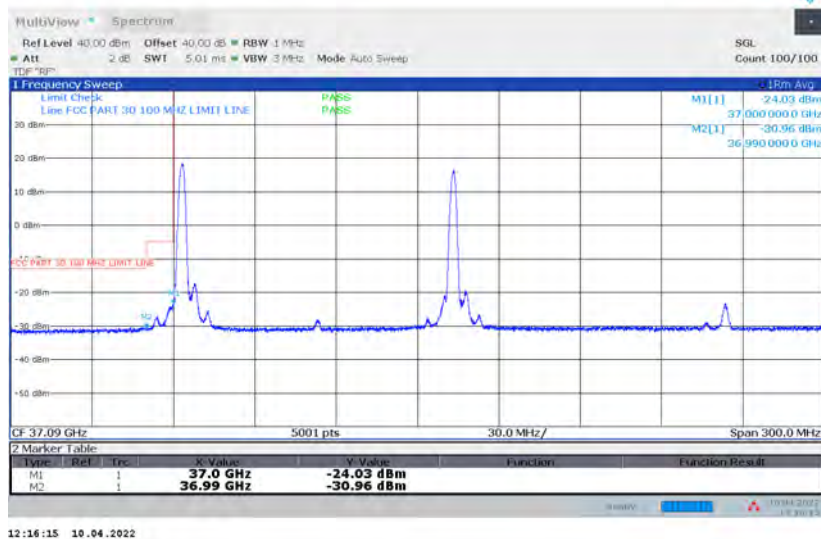


Low-side, Full RB



ANT M2, 100 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

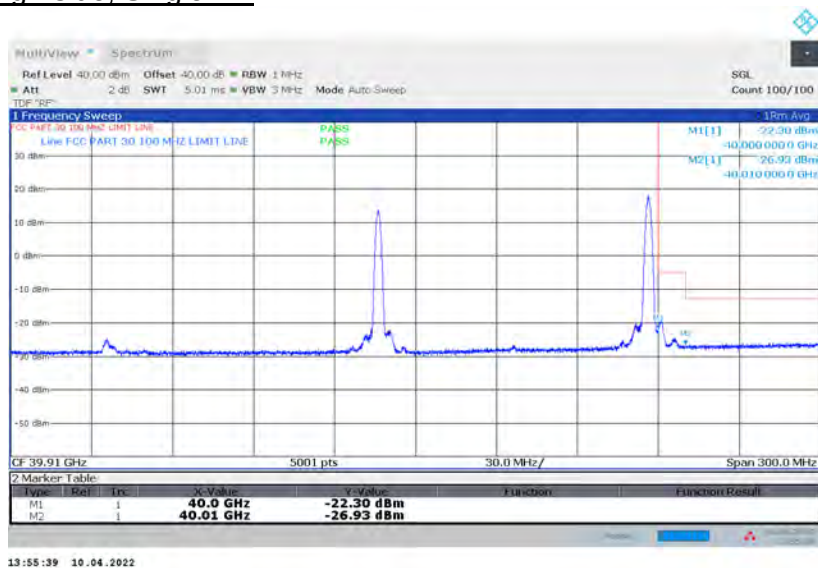

High-side, Full RB




ANT M1, M2 & M3, 100 MHz, SISO-DUAL, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-29.62	-5	-24.62
				36.99	-32.94	-13	-19.94
M2				37	-24.03	-5	-19.03
				36.99	-30.96	-13	-17.96
M3				37	-25.04	-5	-20.04
				36.99	-32.00	-13	-19.00
M1	100	L	64/0	37	-32.52	-5	-27.52
				36.99	-33.20	-13	-20.20
M2				37	-27.94	-5	-22.94
				36.99	-30.26	-13	-17.26
M3				37	-29.85	-5	-24.85
				36.99	-31.27	-13	-18.27
M1	100	H	1/65	40	-27.49	-5	-22.49
				40.01	-30.45	-13	-17.45
M2				40	-22.30	-5	-17.30
				40.01	-26.93	-13	-13.93
M3				40	-25.75	-5	-20.75
				40.01	-29.81	-13	-16.81
M1	100	H	64/2	40	-29.54	-5	-24.54
				40.01	-30.08	-13	-17.08
M2				40	-25.25	-5	-20.25
				40.01	-27.08	-13	-14.08
M3				40	-27.34	-5	-22.34
				40.01	-29.28	-13	-16.28


8.3.27. BAND EDGE n260 SISO-DUAL 3CC

ANT M2, 50 MHz, SISO-DUAL, 3CC, QPSK

Low-side, Single RB

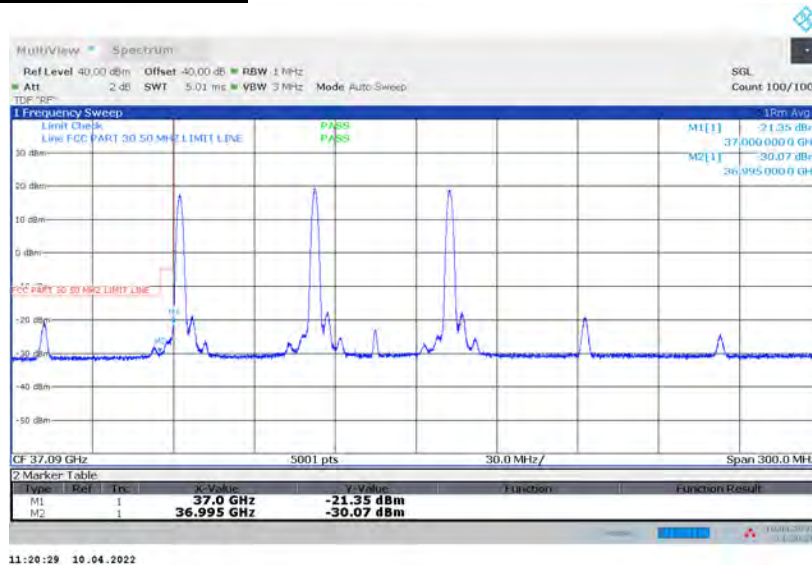


Low-side, Full RB

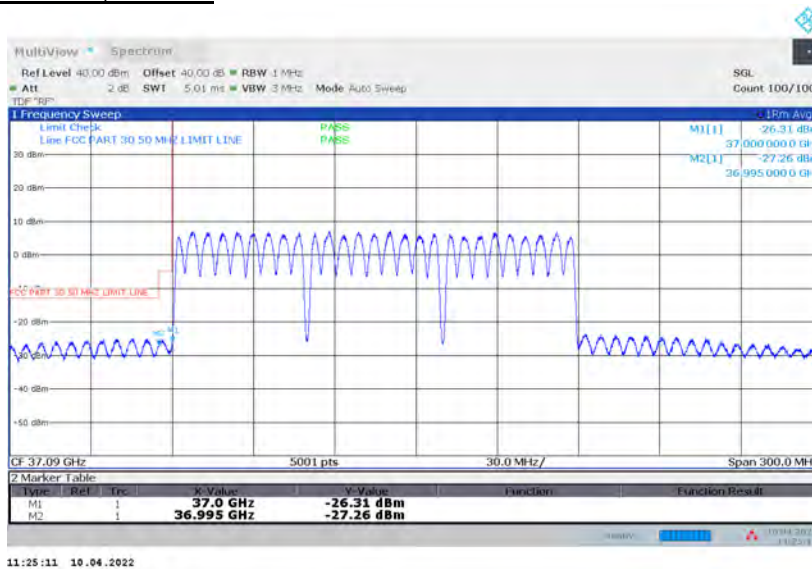


ANT M2, 50 MHz, SISO-DUAL, 3CC, QPSK

High-side, Single RB

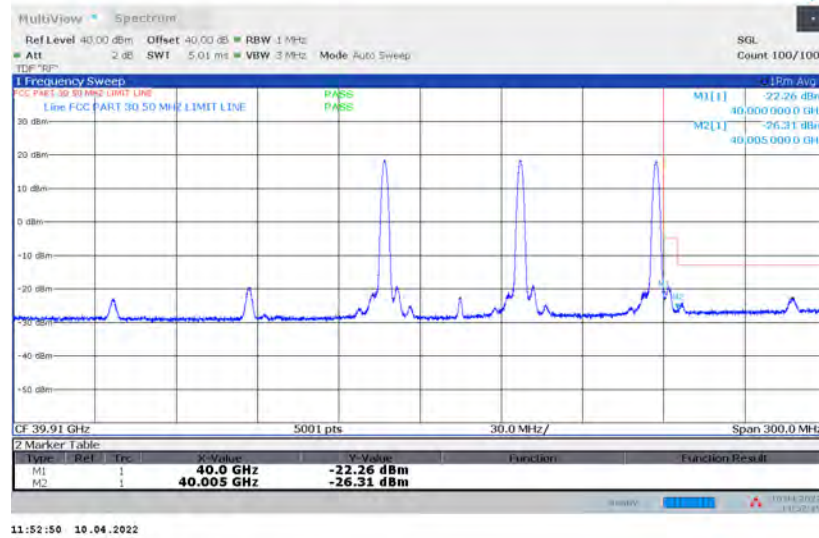

High-side, Full RB

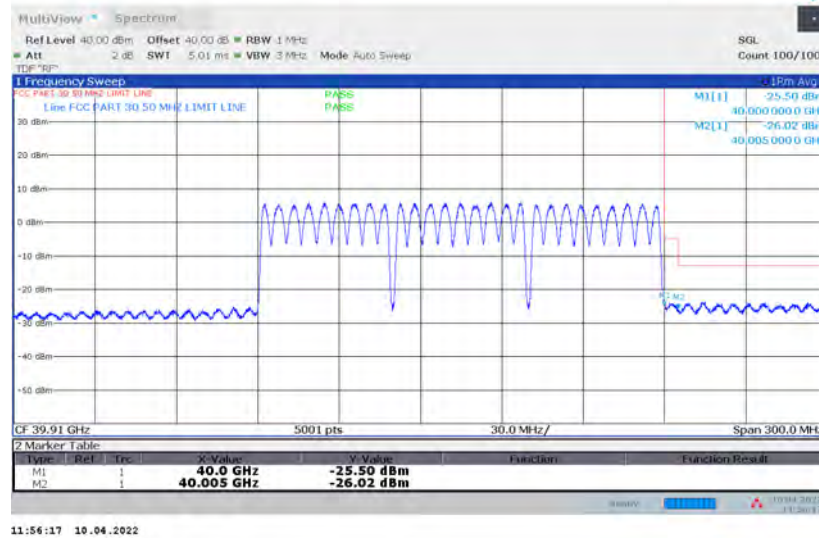

ANT M1, M2 & M3, 50 MHz, SISO-DUAL, 3CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-28.73	-5	-23.73
				36.995	-32.76	-13	-19.76
M2				37	-21.35	-5	-16.35
				36.995	-30.07	-13	-17.07
M3				37	-22.62	-5	-17.62
				36.995	-32.01	-13	-19.01
M1	50	L	32/0	37	-31.96	-5	-26.96
				36.995	-32.91	-13	-19.91
M2				37	-26.31	-5	-21.31
				36.995	-27.26	-13	-14.26
M3				37	-28.08	-5	-23.08
				36.995	-29.74	-13	-16.74
M1	50	H	1/31	40	-27.74	-5	-22.74
				40.005	-29.73	-13	-16.73
M2				40	-22.26	-5	-17.26
				40.005	-26.31	-13	-13.31
M3				40	-25.83	-5	-20.83
				40.005	-29.97	-13	-16.97
M1	50	H	32/0	40	-29.32	-5	-24.32
				40.005	-29.75	-13	-16.75
M2				40	-25.50	-5	-20.50
				40.005	-26.02	-13	-13.02
M3				40	-27.57	-5	-22.57
				40.005	-28.14	-13	-15.14

ANT M2 & M3, 50 MHz, SISO-DUAL, 3CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-19.92	-5	-14.92
				36.995	-29.65	-13	-16.65
M3				37	-25.27	-5	-20.27
				36.995	-32.01	-13	-19.01
M2	50	H	1/31	40	-23.52	-5	-18.52
				40.005	-26.44	-13	-13.44
M3				40	-25.59	-5	-20.59
				40.005	-30.21	-13	-17.21

ANT M2 & M3, 50 MHz, SISO-DUAL, 3CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-20.34	-5	-15.34
				36.995	-30.14	-13	-17.14
M3				37	-22.72	-5	-17.72
				36.995	-31.44	-13	-18.44
M2	50	H	1/31	40	-23.92	-5	-18.92
				40.005	-26.89	-13	-13.89
M3				40	-25.40	-5	-20.40
				40.005	-29.54	-13	-16.54

ANT M2 & M3, 50 MHz, SISO-DUAL, 3CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-20.62	-5	-15.62
				36.995	-30.15	-13	-17.15
M3				37	-24.79	-5	-19.79
				36.995	-32.54	-13	-19.54
M2	50	H	1/31	40	-22.93	-5	-17.93
				40.005	-27.17	-13	-14.17
M3				40	-25.75	-5	-20.75
				40.005	-29.15	-13	-16.15

ANT M2, 100 MHz, SISO-DUAL, 3CC, QPSK

Low-side, Single RB

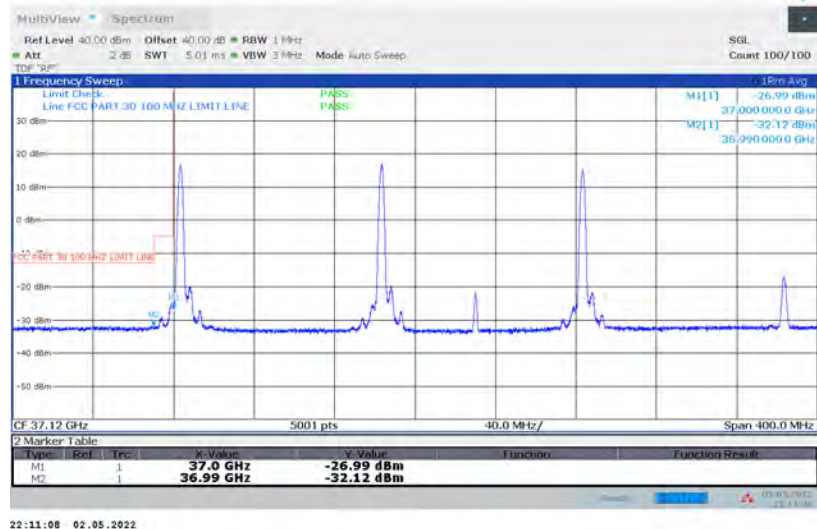


Low-side, Full RB

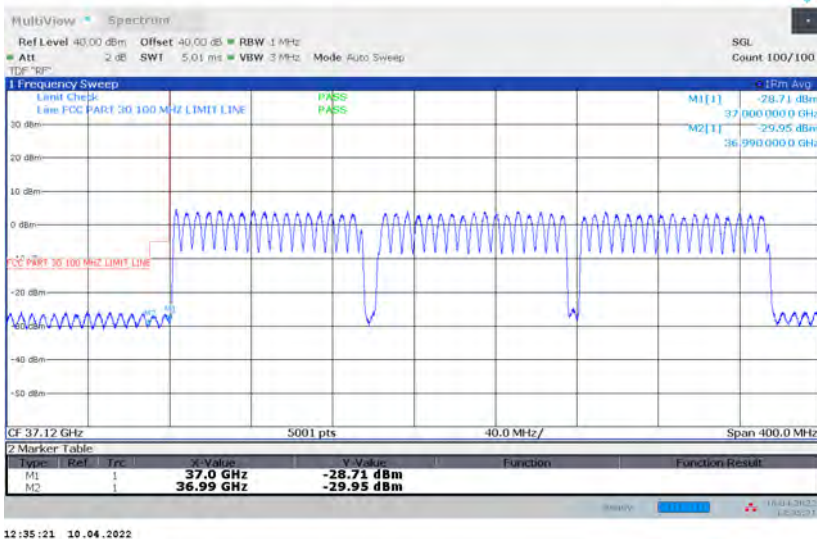


ANT M2, 100 MHz, SISO-DUAL, 3CC, QPSK

High-side, Single RB

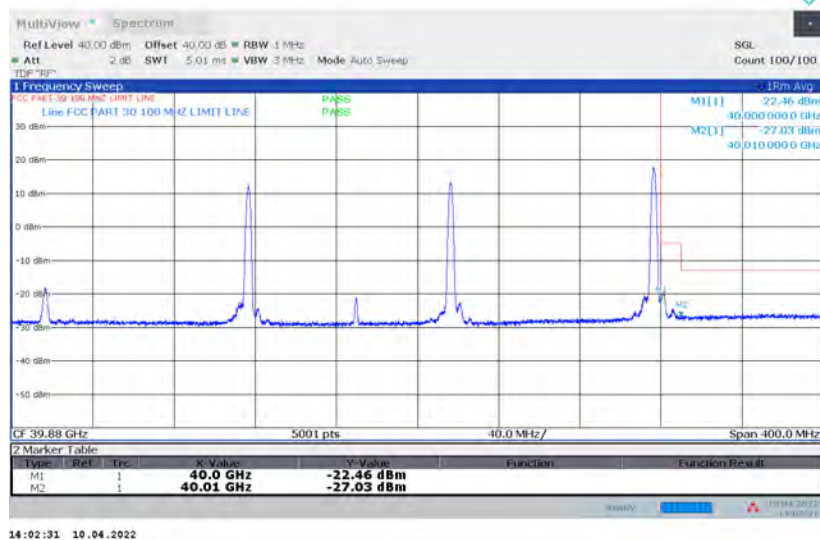

High-side, Full RB

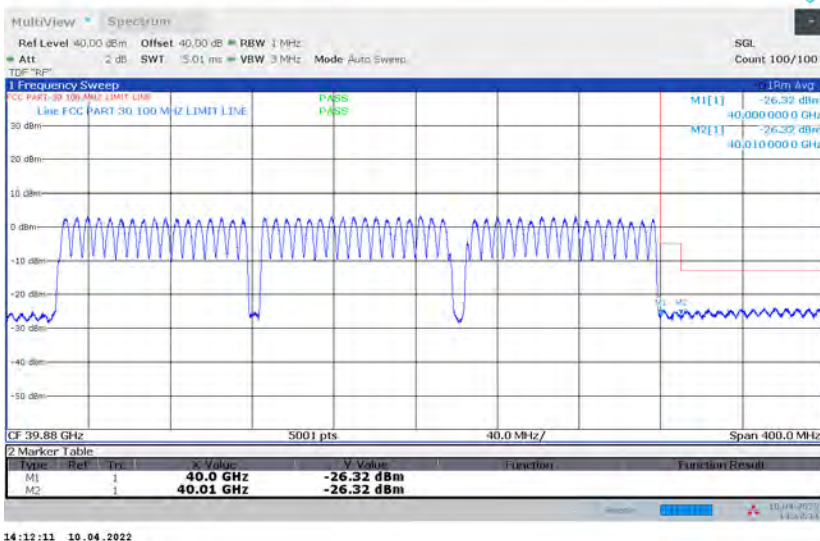


ANT M1, M2 & M3, 100 MHz, SISO-DUAL, 3CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-31.96	-5	-26.96
				36.99	-32.85	-13	-19.85
M2				37	-26.99	-5	-21.99
				36.99	-32.12	-13	-19.12
M3				37	-26.49	-5	-21.49
				36.99	-32.78	-13	-19.78
M1	100	L	64/0	37	-32.27	-5	-27.27
				36.99	-32.80	-13	-19.80
M2				37	-28.71	-5	-23.71
				36.99	-29.95	-13	-16.95
M3				37	-29.36	-5	-24.36
				36.99	-30.78	-13	-17.78
M1	100	H	1/65	40	-28.95	-5	-23.95
				40.01	-29.80	-13	-16.80
M2				40	-22.46	-5	-17.46
				40.01	-27.03	-13	-14.03
M3				40	-26.55	-5	-21.55
				40.01	-30.11	-13	-17.11
M1	100	H	64/2	40	-30.37	-5	-25.37
				40.01	-29.87	-13	-16.87
M2				40	-26.32	-5	-21.32
				40.01	-26.32	-13	-13.32
M3				40	-29.11	-5	-24.11
				40.01	-28.60	-13	-15.60


8.3.28. BAND EDGE n260 SISO-DUAL 4CC

ANT M2, 50 MHz, SISO-DUAL, 4CC, QPSK

Low-side, Single RB

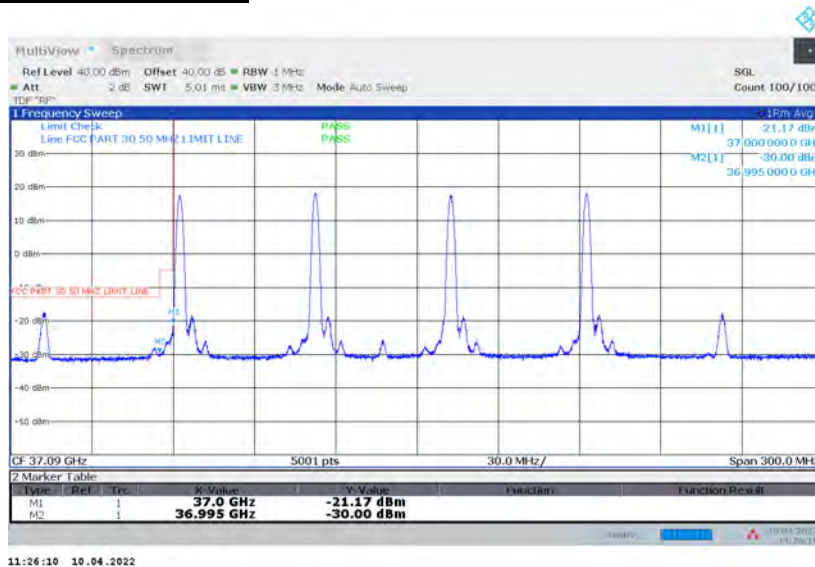


Low-side, Full RB

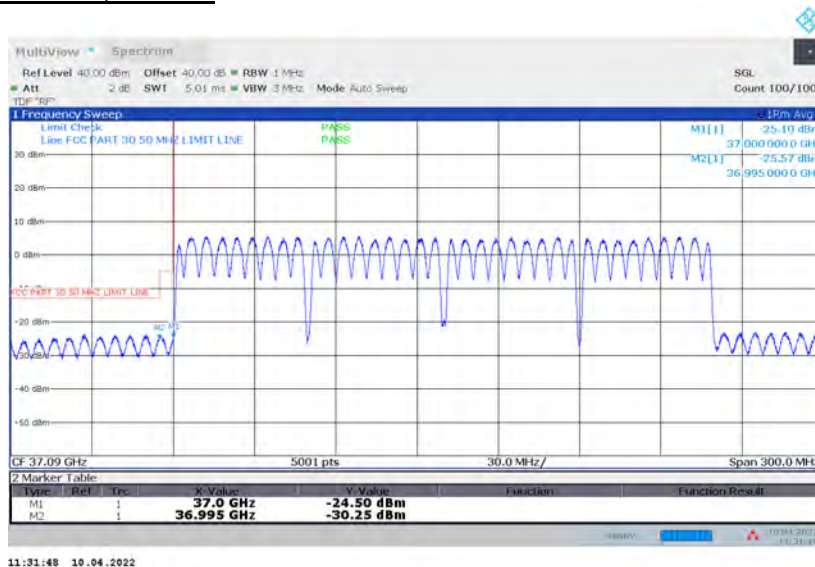


ANT M2, 50 MHz, SISO-DUAL, 4CC, QPSK

High-side, Single RB

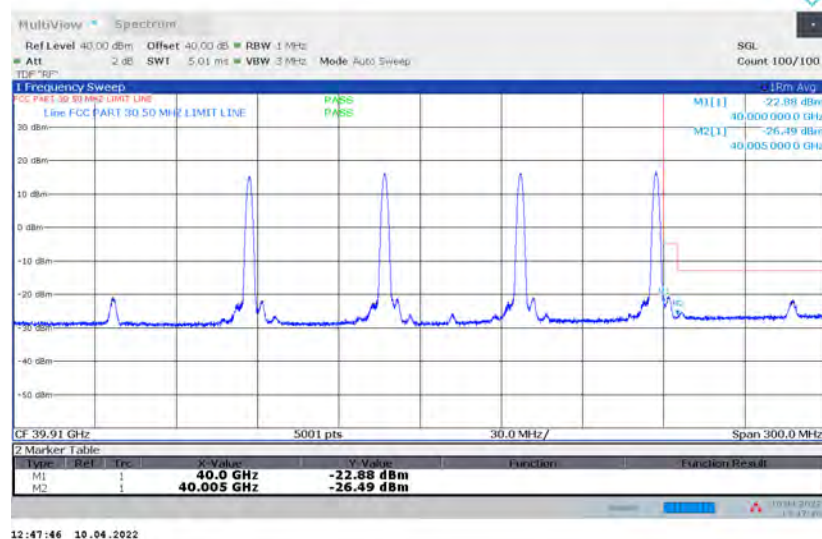

High-side, Full RB

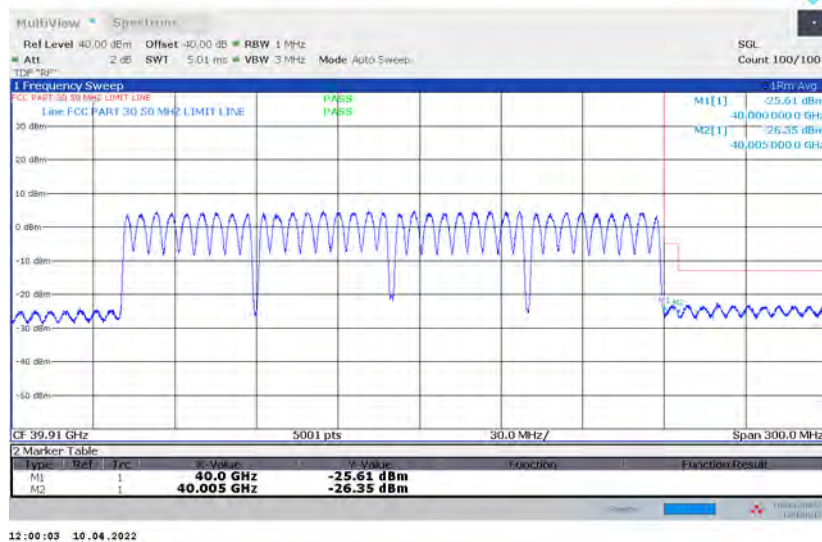

ANT M1, M2 & M3, 50 MHz, SISO-DUAL, 4CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-29.27	-5	-24.27
				36.995	-32.94	-13	-19.94
M2				37	-21.17	-5	-16.17
				36.995	-30.00	-13	-17.00
M3				37	-23.48	-5	-18.48
				36.995	-31.69	-13	-18.69
M1	50	L	32/0	37	-32.57	-5	-27.57
				36.995	-32.57	-13	-19.57
M2				37	-24.50	-5	-19.50
				36.995	-30.25	-13	-17.25
M3				37	-27.18	-5	-22.18
				36.995	-26.66	-13	-13.66
M1	50	H	1/31	40	-29.45	-5	-24.45
				40.005	-30.17	-13	-17.17
M2				40	-22.88	-5	-17.88
				40.005	-26.49	-13	-13.49
M3				40	-25.34	-5	-20.34
				40.005	-30.01	-13	-17.01
M1	50	H	32/0	40	-29.83	-5	-24.83
				40.005	-30.09	-13	-17.09
M2				40	-25.61	-5	-20.61
				40.005	-26.35	-13	-13.35
M3				40	-28.78	-5	-23.78
				40.005	-27.87	-13	-14.87

ANT M2 & M3, 50 MHz, SISO-DUAL, 4CC, BPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-22.22	-5	-17.22
				36.995	-30.53	-13	-17.53
M3				37	-23.71	-5	-18.71
				36.995	-31.84	-13	-18.84
M2	50	H	1/31	40	-22.58	-5	-17.58
				40.005	-26.65	-13	-13.65
M3				40	-26.58	-5	-21.58
				40.005	-29.64	-13	-16.64

ANT M2 & M3, 50 MHz, SISO-DUAL, 4CC, 16QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-20.65	-5	-15.65
				36.995	-30.58	-13	-17.58
M3				37	-23.77	-5	-18.77
				36.995	-32.19	-13	-19.19
M2	50	H	1/31	40	-23.78	-5	-18.78
				40.005	-26.78	-13	-13.78
M3				40	-25.50	-5	-20.50
				40.005	-29.73	-13	-16.73

ANT M2 & M3, 50 MHz, SISO-DUAL, 4CC, 64QAM


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M2	50	L	1/0	37	-24.50	-5	-19.50
				36.995	-30.25	-13	-17.25
M3				37	-25.01	-5	-20.01
				36.995	-31.54	-13	-18.54
M2	50	H	1/31	40	-23.73	-5	-18.73
				40.005	-27.09	-13	-14.09
M3				40	-27.09	-5	-22.09
				40.005	-29.78	-13	-16.78

ANT M2, 100 MHz, SISO-DUAL, 4CC, QPSK

Low-side, Single RB

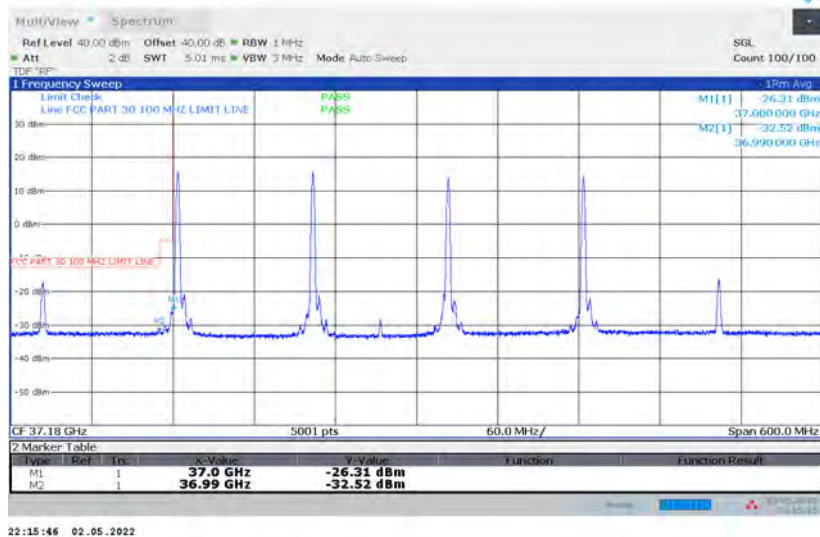


Low-side, Full RB

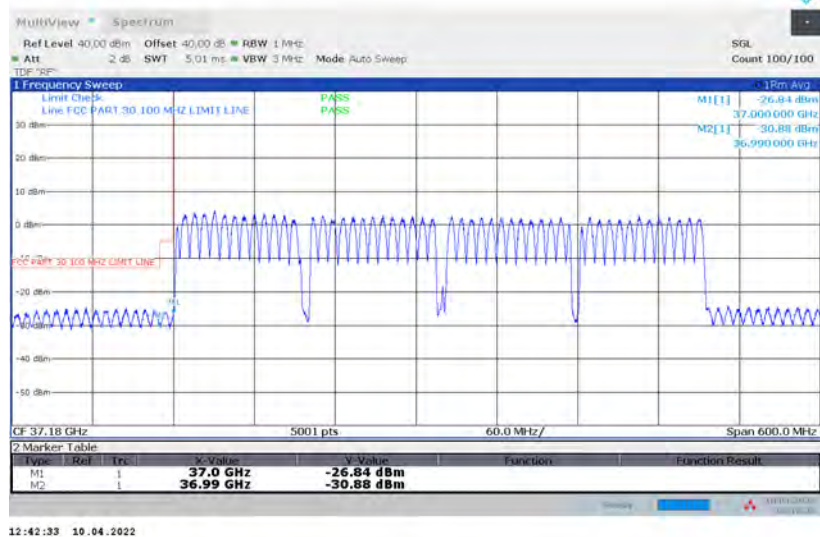

ANT M2, 100 MHz, SISO-DUAL, 4CC, QPSK

High-side, Single RB

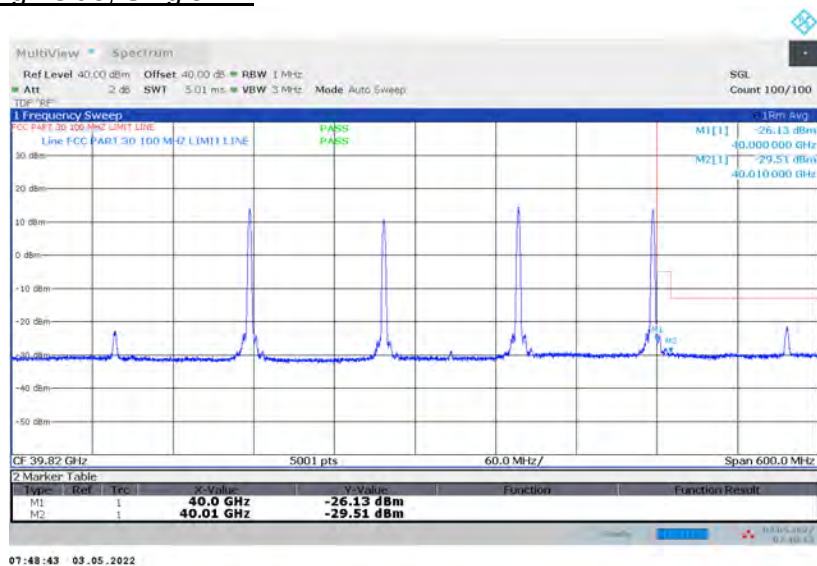

High-side, Full RB




ANT M1, M2 & M3, 100 MHz, SISO-DUAL, 4CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-30.12	-5	-25.12
				36.99	-32.79	-13	-19.79
M2				37	-26.31	-5	-21.31
				36.99	-32.52	-13	-19.52
M3				37	-26.79	-5	-21.79
				36.99	-32.51	-13	-19.51
M1	100	L	64/0	37	-32.43	-5	-27.43
				36.99	-32.26	-13	-19.26
M2				37	-26.84	-5	-21.84
				36.99	-30.88	-13	-17.88
M3				37	-28.35	-5	-23.35
				36.99	-31.47	-13	-18.47
M1	100	H	1/65	40	-28.94	-5	-23.94
				40.01	-30.67	-13	-17.67
M2				40	-26.31	-5	-21.31
				40.01	-29.51	-13	-16.51
M3				40	-26.30	-5	-21.30
				40.01	-29.51	-13	-16.51
M1	100	H	64/2	40	-29.92	-5	-24.92
				40.01	-30.14	-13	-17.14
M2				40	-25.04	-5	-20.04
				40.01	-25.16	-13	-12.16
M3				40	-28.26	-5	-23.26
				40.01	-28.39	-13	-15.39


8.3.29. BAND EDGE n260 MIMO 1CC

ANT M2, 50 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

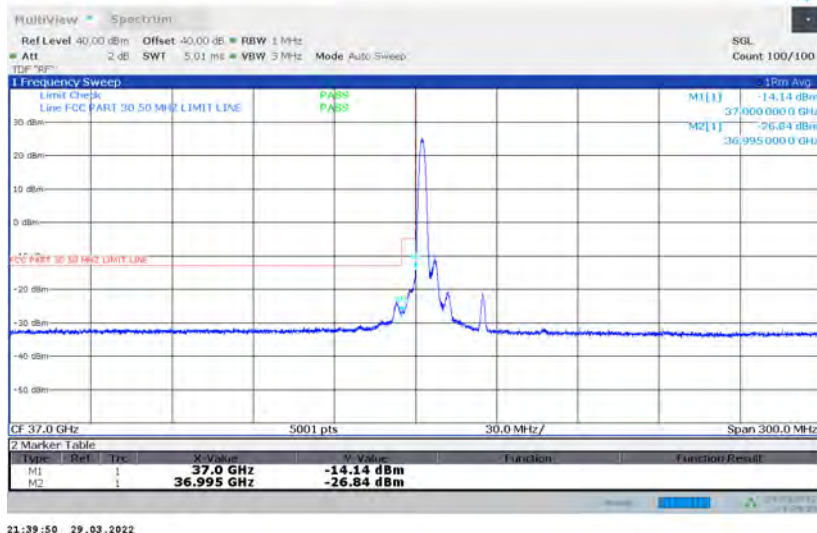


Low-side, Full RB

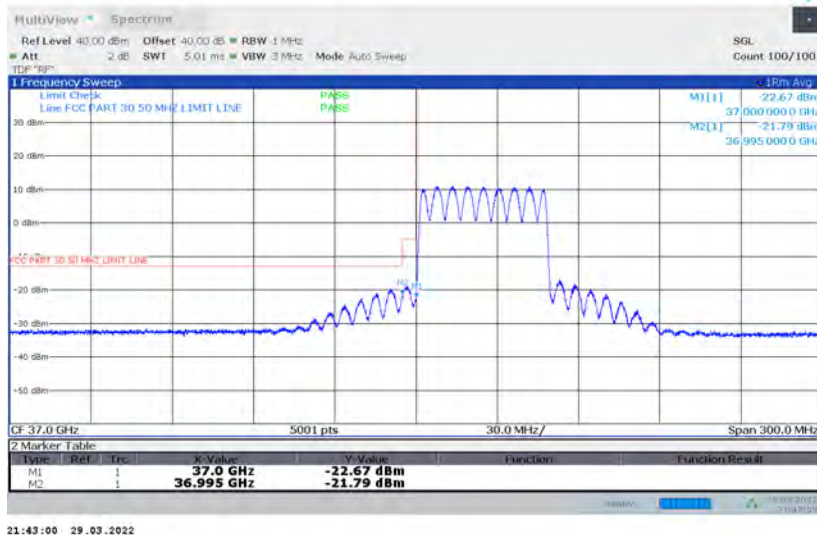


ANT M2, 50 MHz, MIMO, 1CC, QPSK

High-side, Single RB

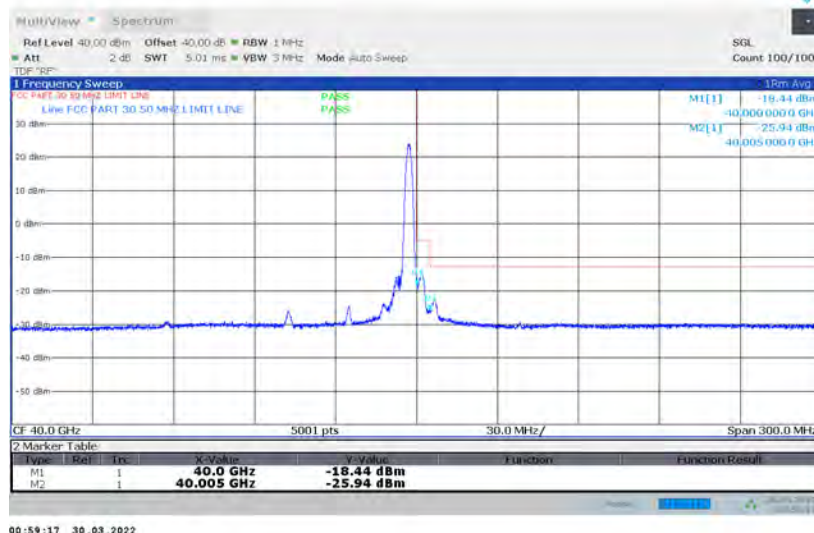

High-side, Full RB

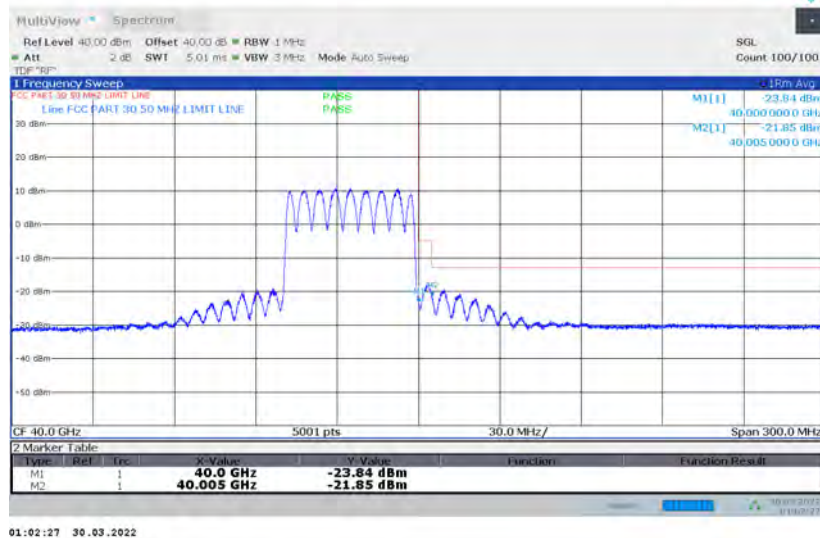


ANT M1, M2 & M3, 50 MHz, MIMO, 1CC, QPSK


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-23.30	-5	-18.30
				36.995	-30.43	-13	-17.43
M2				37	-14.14	-5	-9.14
				36.995	-26.84	-13	-13.84
M3				37	-13.27	-5	-8.27
				36.995	-19.81	-13	-6.81
M1	50	L	32/0	37	-28.86	-5	-23.86
				36.995	-29.12	-13	-16.12
M2				37	-22.67	-5	-17.67
				36.995	-21.79	-13	-8.79
M3				37	-17.93	-5	-12.93
				36.995	-17.46	-13	-4.46
M1	50	H	1/31	40	-24.33	-5	-19.33
				40.005	-27.82	-13	-14.82
M2				40	-18.44	-5	-13.44
				40.005	-25.94	-13	-12.94
M3				40	-16.35	-5	-11.35
				40.005	-21.61	-13	-8.61
M1	50	H	32/0	40	-26.54	-5	-21.54
				40.005	-26.95	-13	-13.95
M2				40	-23.84	-5	-18.84
				40.005	-21.85	-13	-8.85
M3				40	-18.49	-5	-13.49
				40.005	-18.29	-13	-5.29

ANT M2, 100 MHz, MIMO, 1CC, QPSK

Low-side, Single RB

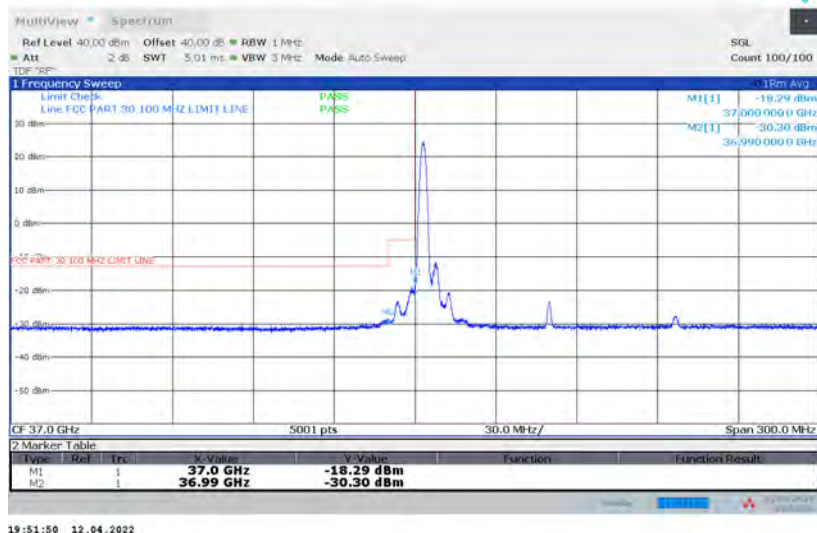


Low-side, Full RB

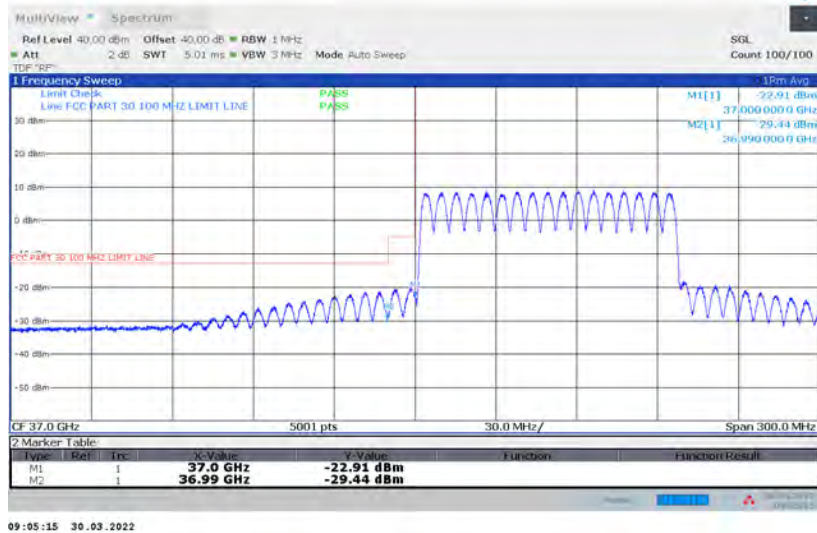


ANT M2, 100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

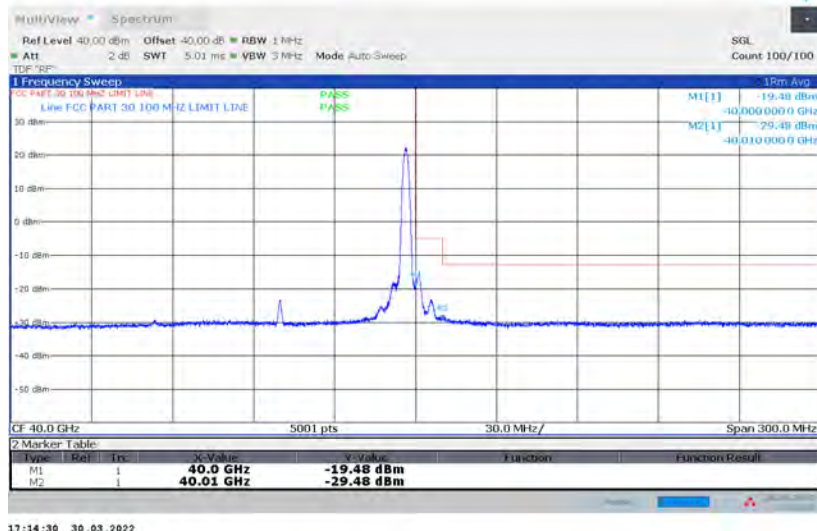

High-side, Full RB

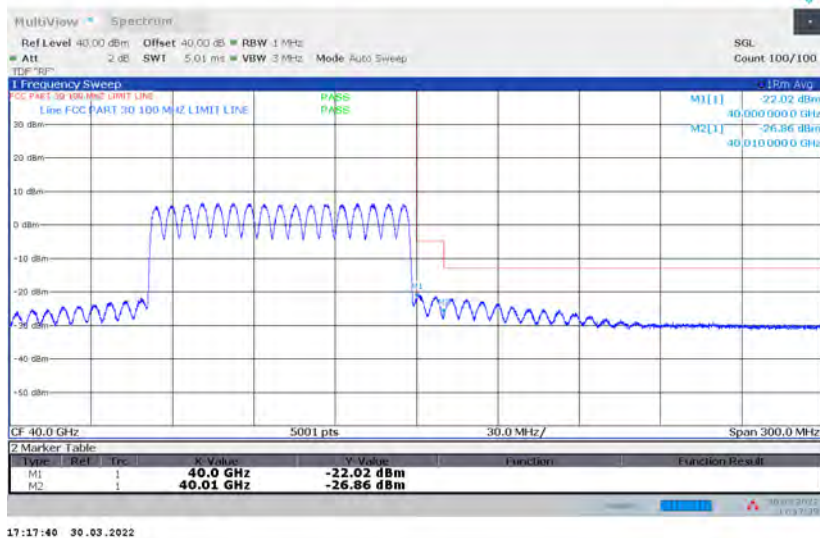


ANT M1, M2 & M3, 100 MHz, MIMO, 1CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-26.62	-5	-21.62
				36.99	-31.73	-13	-18.73
M2				37	-18.29	-5	-13.29
				36.99	-30.30	-13	-17.30
M3				37	-15.94	-5	-10.94
				36.99	-20.67	-13	-7.67
M1	100	L	66/0	37	-30.17	-5	-25.17
				36.99	-29.89	-13	-16.89
M2				37	-22.91	-5	-17.91
				36.99	-29.44	-13	-16.44
M3				37	-18.31	-5	-13.31
				36.99	-19.14	-13	-6.14
M1	100	H	1/65	40	-25.29	-5	-20.29
				40.01	-27.36	-13	-14.36
M2				40	-19.48	-5	-14.48
				40.01	-29.48	-13	-16.48
M3				40	-17.67	-5	-12.67
				40.01	-21.54	-13	-8.54
M1	100	H	66/0	40	-26.86	-5	-21.86
				40.01	-26.57	-13	-13.57
M2				40	-22.02	-5	-17.02
				40.01	-26.86	-13	-13.86
M3				40	-20.38	-5	-15.38
				40.01	-21.36	-13	-8.36


8.3.30. BAND EDGE n260 MIMO 2CC

ANT M2, 50 MHz, MIMO, 2CC, QPSK

Low-side, Single RB

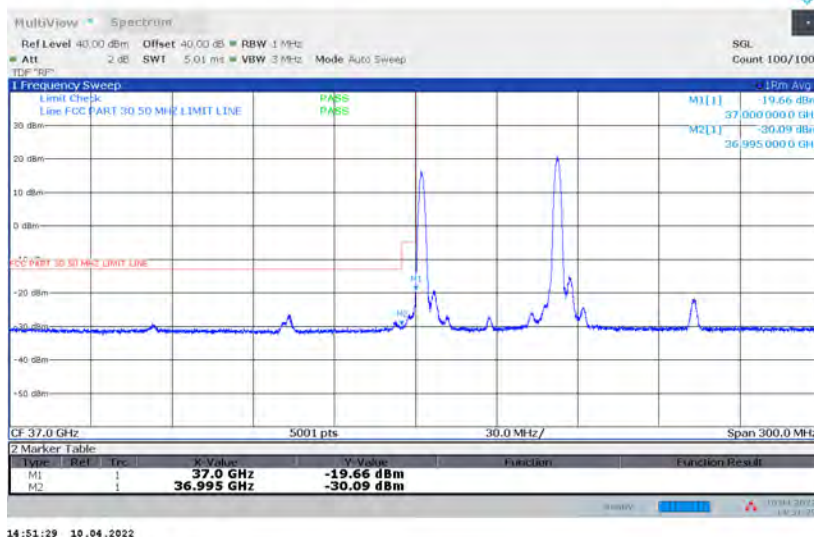


Low-side, Full RB

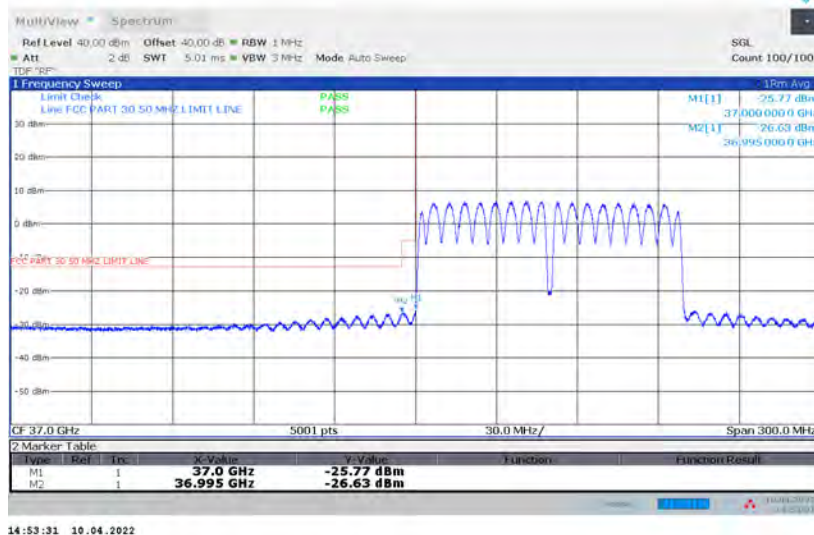

ANT M2, 50 MHz, MIMO, 2CC, QPSK

High-side, Single RB

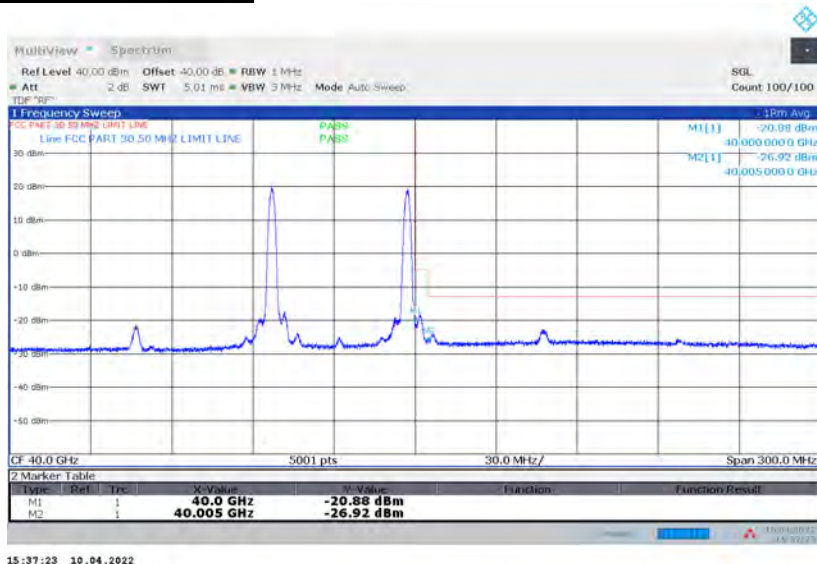

High-side, Full RB




ANT M1, M2 & M3, 50 MHz, MIMO, 2CC, QPSK


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-28.23	-5	-23.23
				36.995	-32.77	-13	-19.77
M2				37	-19.66	-5	-14.66
				36.995	-30.09	-13	-17.09
M3				37	-26.57	-5	-21.57
				36.995	-31.77	-13	-18.77
M1	50	L	32/0	37	-32.44	-5	-27.44
				36.995	-32.59	-13	-19.59
M2				37	-25.77	-5	-20.77
				36.995	-26.63	-13	-13.63
M3				37	-29.94	-5	-24.94
				36.995	-30.65	-13	-17.65
M1	50	H	1/31	40	-28.01	-5	-23.01
				40.005	-30.64	-13	-17.64
M2				40	-20.88	-5	-15.88
				40.005	-26.92	-13	-13.92
M3				40	-24.46	-5	-19.46
				40.005	-28.93	-13	-15.93
M1	50	H	32/0	40	-29.91	-5	-24.91
				40.005	-30.75	-13	-17.75
M2				40	-26.06	-5	-21.06
				40.005	-26.24	-13	-13.24
M3				40	-28.81	-5	-23.81
				40.005	-29.77	-13	-16.77

ANT M2, 100 MHz, MIMO, 2CC, QPSK

Low-side, Single RB

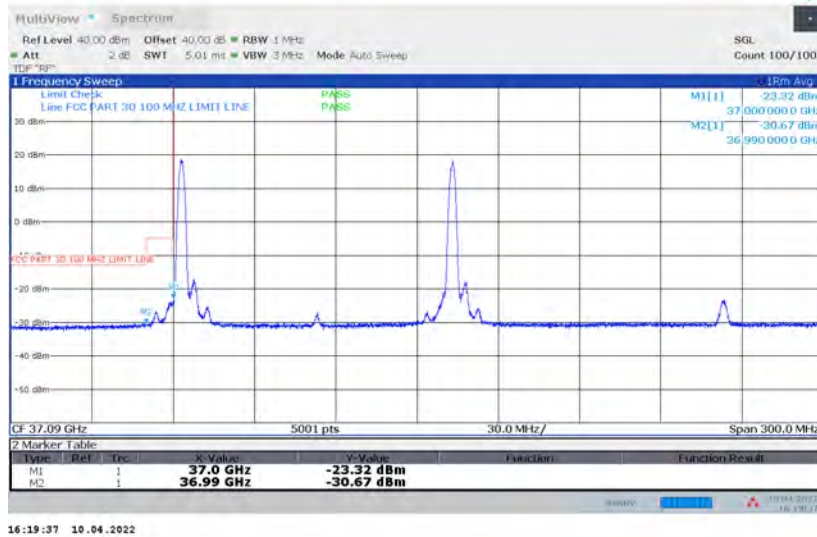


Low-side, Full RB

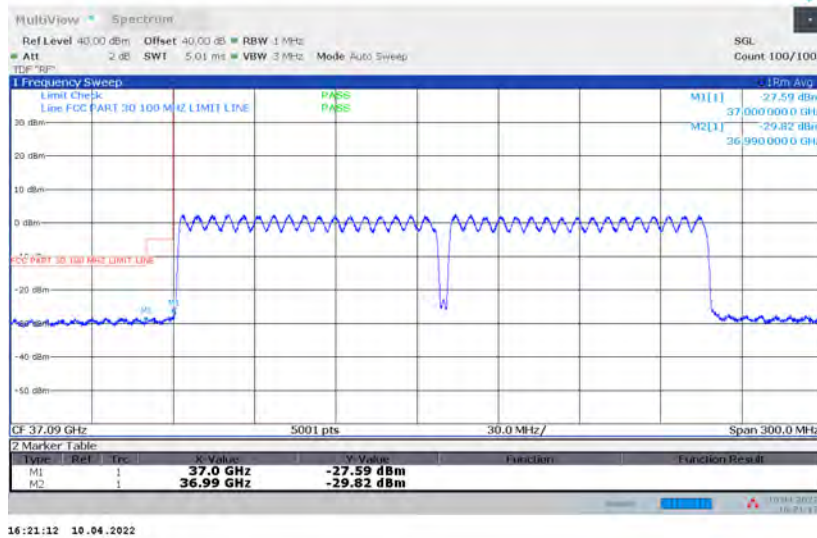


ANT M2, 100 MHz, MIMO, 2CC, QPSK

High-side, Single RB

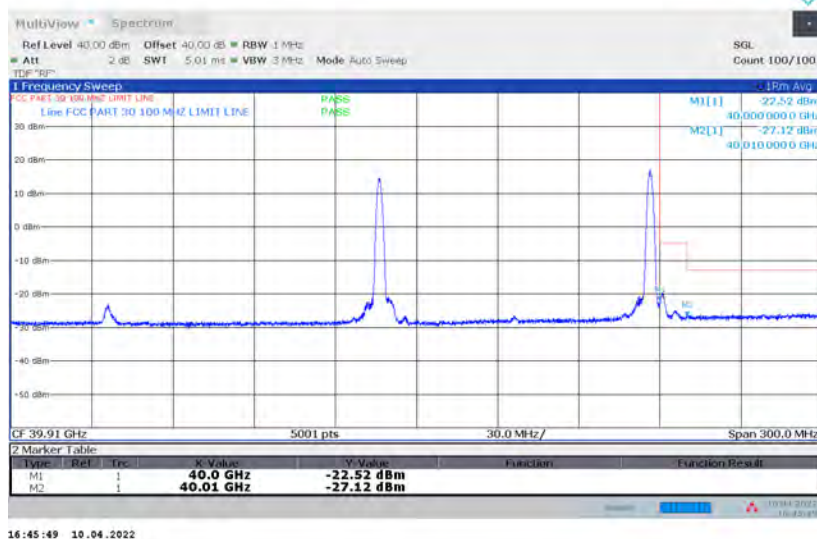

High-side, Full RB

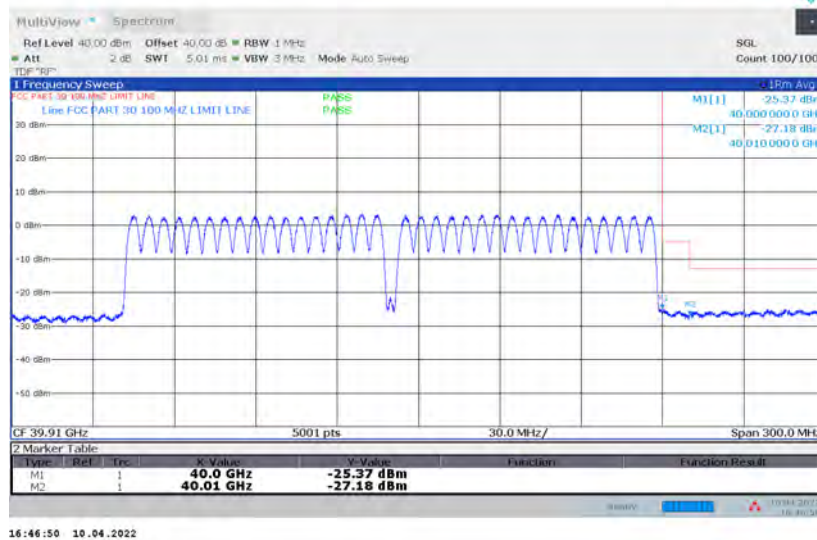


ANT M1, M2 & M3, 100 MHz, MIMO, 2CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-30.85	-5	-25.85
				36.99	-32.57	-13	-19.57
M2				37	-23.32	-5	-18.32
				36.99	-30.67	-13	-17.67
M3				37	-26.88	-5	-21.88
				36.99	-32.18	-13	-19.18
M1	100	L	66/0	37	-32.96	-5	-27.96
				36.99	-32.71	-13	-19.71
M2				37	-27.59	-5	-22.59
				36.99	-29.82	-13	-16.82
M3				37	-29.82	-5	-24.82
				36.99	-32.75	-13	-19.75
M1	100	H	1/65	40	-28.59	-5	-23.59
				40.01	-29.61	-13	-16.61
M2				40	-22.52	-5	-17.52
				40.01	-27.12	-13	-14.12
M3				40	-25.98	-5	-20.98
				40.01	-30.14	-13	-17.14
M1	100	H	66/0	40	-30.01	-5	-25.01
				40.01	-30.17	-13	-17.17
M2				40	-25.37	-5	-20.37
				40.01	-27.18	-13	-14.18
M3				40	-27.20	-5	-22.20
				40.01	-28.66	-13	-15.66


8.3.31. BAND EDGE n260 MIMO 3CC

ANT M2, 50 MHz, MIMO, 3CC, QPSK

Low-side, Single RB

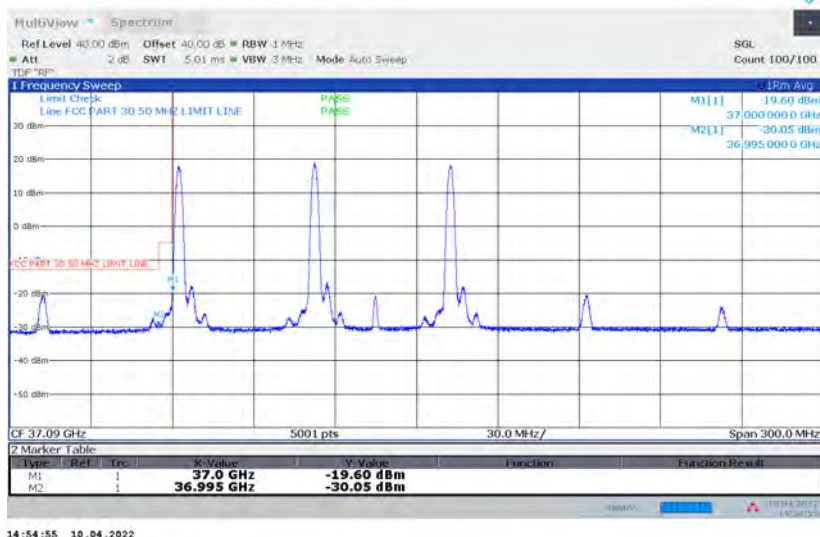


Low-side, Full RB

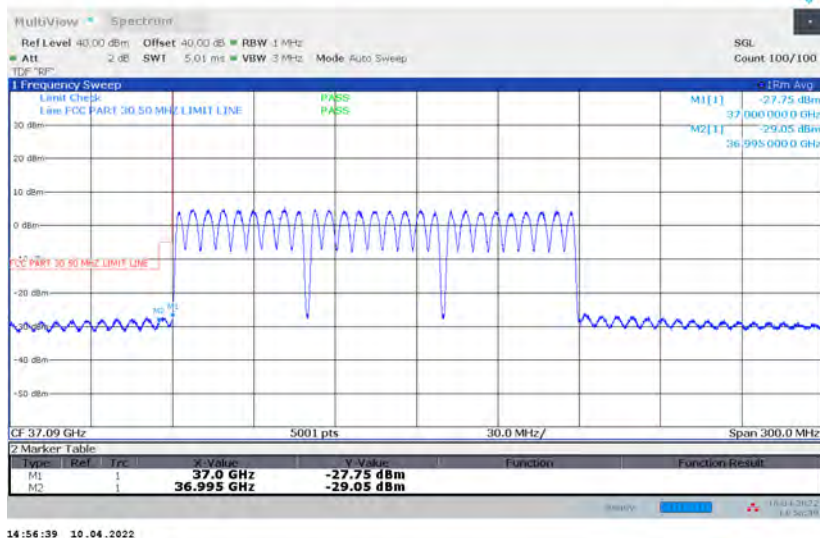


ANT M2, 50 MHz, MIMO, 3CC, QPSK

High-side, Single RB

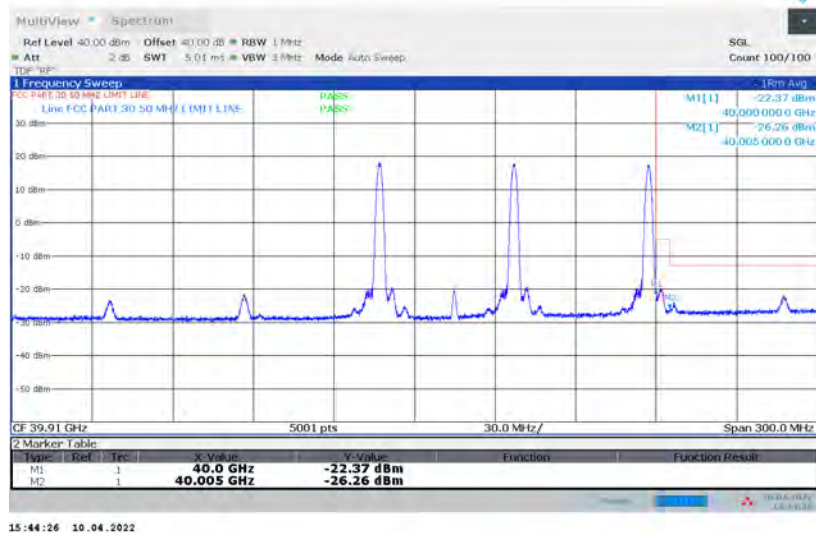

High-side, Full RB

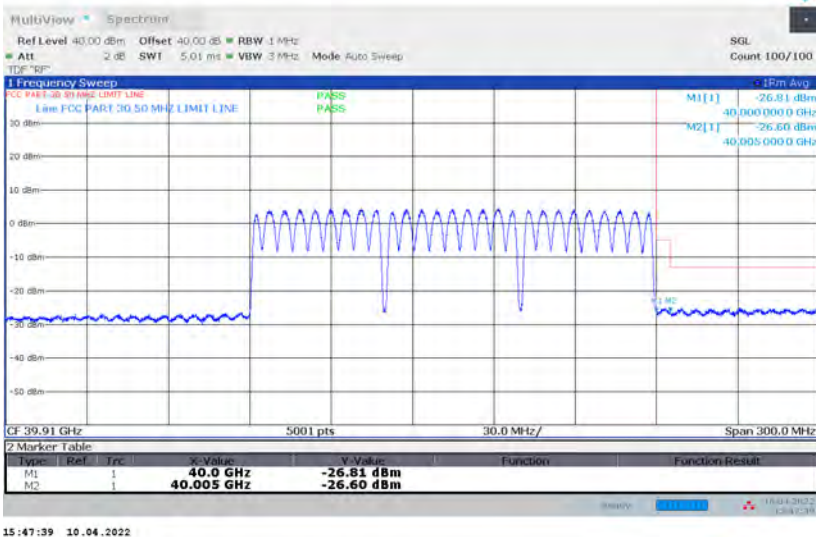


ANT M1, M2 & M3, 50 MHz, MIMO, 3CC, QPSK


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-28.85	-5	-23.85
				36.995	-33.17	-13	-20.17
M2				37	-19.60	-5	-14.60
				36.995	-30.05	-13	-17.05
M3				37	-26.84	-5	-21.84
				36.995	-32.14	-13	-19.14
M1	50	L	32/0	37	-32.87	-5	-27.87
				36.995	-32.90	-13	-19.90
M2				37	-27.75	-5	-22.75
				36.995	-29.05	-13	-16.05
M3				37	-30.73	-5	-25.73
				36.995	-30.99	-13	-17.99
M1	50	H	1/31	40	-28.51	-5	-23.51
				40.005	-29.65	-13	-16.65
M2				40	-22.37	-5	-17.37
				40.005	-26.26	-13	-13.26
M3				40	-24.44	-5	-19.44
				40.005	-29.65	-13	-16.65
M1	50	H	32/0	40	-29.67	-5	-24.67
				40.005	-30.01	-13	-17.01
M2				40	-26.81	-5	-21.81
				40.005	-26.60	-13	-13.60
M3				40	-28.89	-5	-23.89
				40.005	-29.13	-13	-16.13

ANT M2, 100 MHz, MIMO, 3CC, QPSK

Low-side, Single RB

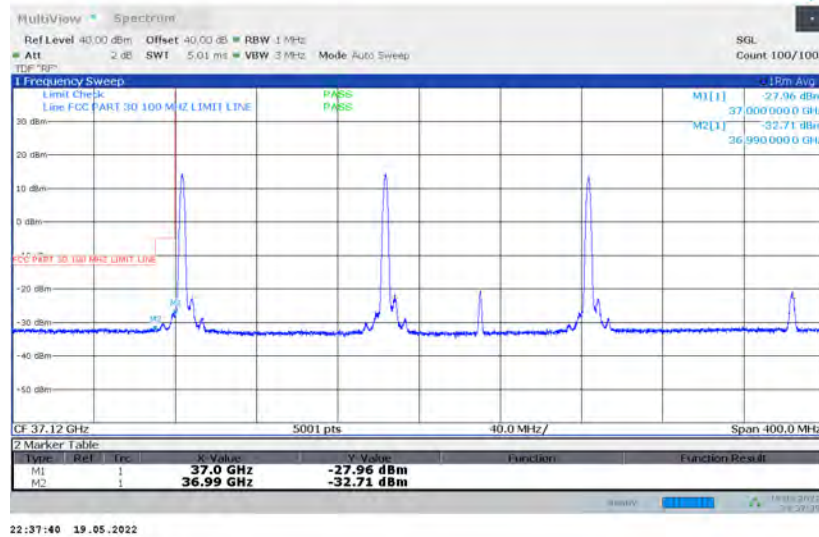


Low-side, Full RB

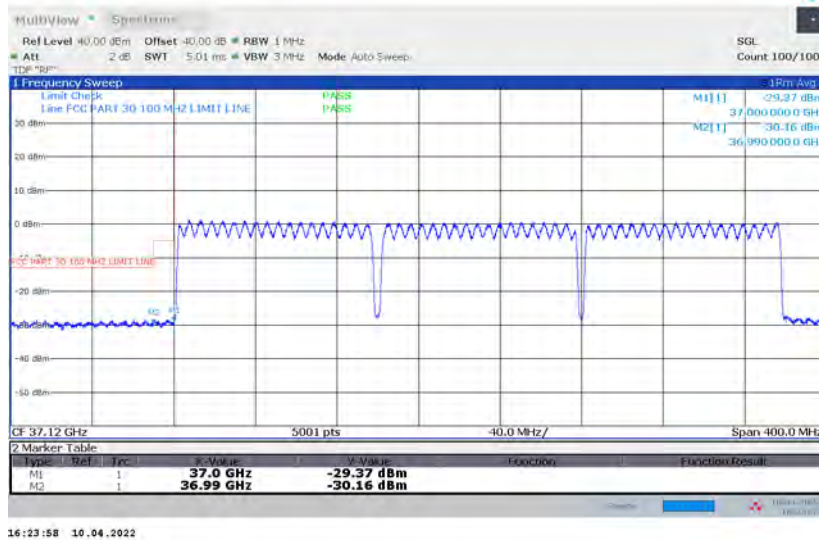


ANT M2, 100 MHz, MIMO, 3CC, QPSK

High-side, Single RB

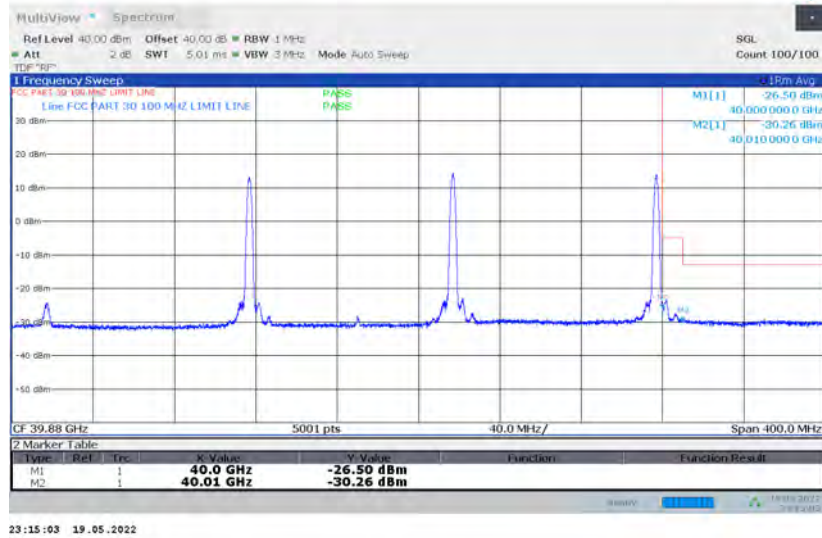

High-side, Full RB

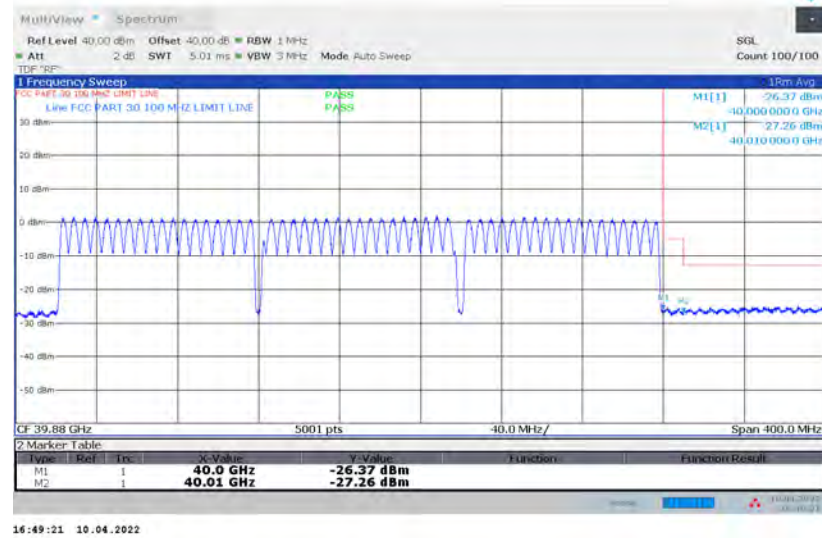


ANT M1, M2 & M3, 100 MHz, MIMO, 3CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-31.99	-5	-26.99
				36.99	-32.72	-13	-19.72
M2				37	-27.96	-5	-22.96
				36.99	-32.71	-13	-19.71
M3				37	-26.67	-5	-21.67
				36.99	-32.69	-13	-19.69
M1	100	L	66/0	37	-32.55	-5	-27.55
				36.99	-32.39	-13	-19.39
M2				37	-29.37	-5	-24.37
				36.99	-30.16	-13	-17.16
M3				37	-31.67	-5	-26.67
				36.99	-31.09	-13	-18.09
M1	100	H	1/65	40	-28.76	-5	-23.76
				40.01	-30.13	-13	-17.13
M2				40	-26.50	-5	-21.50
				40.01	-30.26	-13	-17.26
M3				40	-26.56	-5	-21.56
				40.01	-30.13	-13	-17.13
M1	100	H	66/0	40	-30.40	-5	-25.40
				40.01	-30.43	-13	-17.43
M2				40	-26.37	-5	-21.37
				40.01	-27.26	-13	-14.26
M3				40	-29.10	-5	-24.10
				40.01	-28.48	-13	-15.48


8.3.32. BAND EDGE n260 MIMO 4CC

ANT M2, 50 MHz, MIMO, 4CC, QPSK

Low-side, Single RB

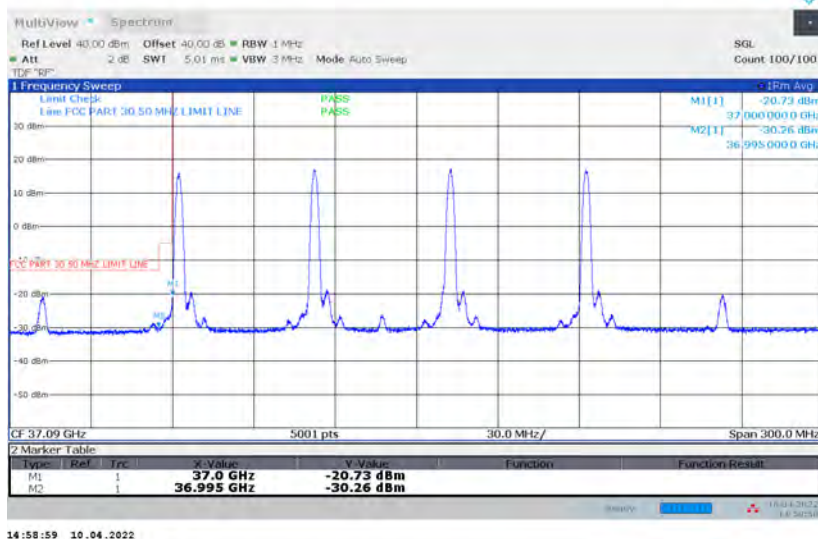


Low-side, Full RB

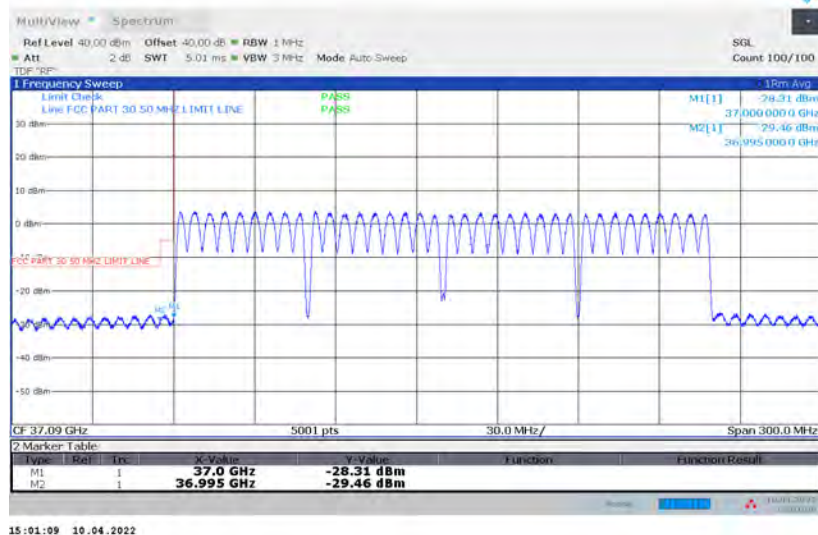


ANT M2, 50 MHz, MIMO, 4CC, QPSK

High-side, Single RB

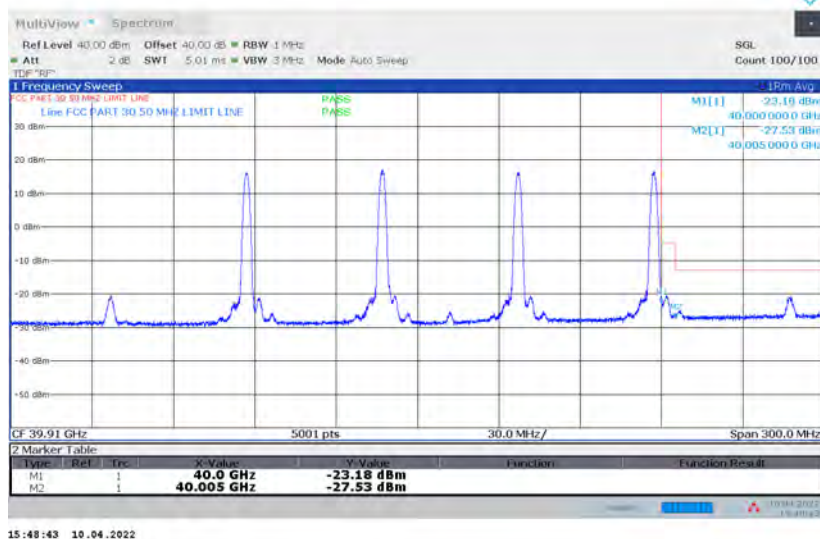

High-side, Full RB

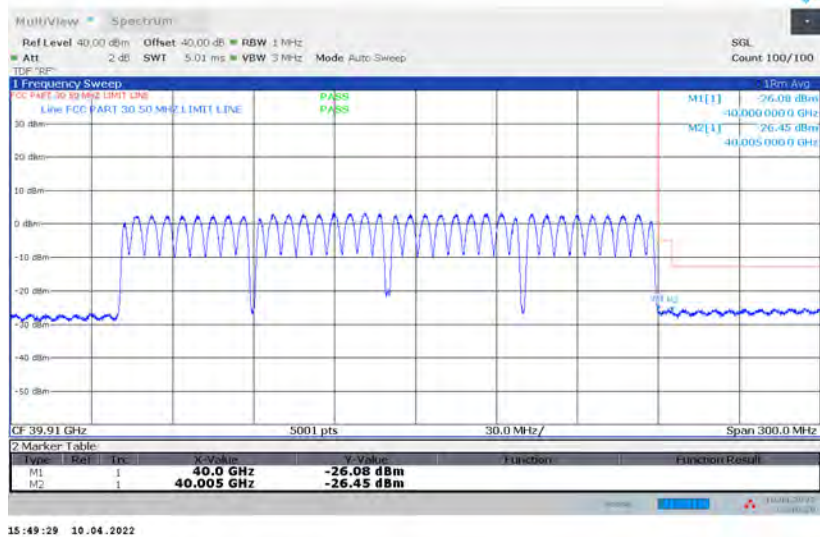


ANT M1, M2 & M3, 50 MHz, MIMO, 4CC, QPSK


Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	50	L	1/0	37	-29.85	-5	-24.85
				36.995	-32.59	-13	-19.59
M2				37	-20.73	-5	-15.73
				36.995	-30.26	-13	-17.26
M3				37	-26.87	-5	-21.87
				36.995	-32.03	-13	-19.03
M1	50	L	32/0	37	-32.00	-5	-27.00
				36.995	-32.92	-13	-19.92
M2				37	-28.31	-5	-23.31
				36.995	-29.46	-13	-16.46
M3				37	-30.43	-5	-25.43
				36.995	-31.29	-13	-18.29
M1	50	H	1/31	40	-28.93	-5	-23.93
				40.005	-30.01	-13	-17.01
M2				40	-23.18	-5	-18.18
				40.005	-27.53	-13	-14.53
M3				40	-25.28	-5	-20.28
				40.005	-29.23	-13	-16.23
M1	50	H	32/0	40	-30.11	-5	-25.11
				40.005	-30.14	-13	-17.14
M2				40	-26.08	-5	-21.08
				40.005	-26.45	-13	-13.45
M3				40	-28.68	-5	-23.68
				40.005	-29.68	-13	-16.68

ANT M2, 100 MHz, MIMO, 4CC, QPSK

Low-side, Single RB

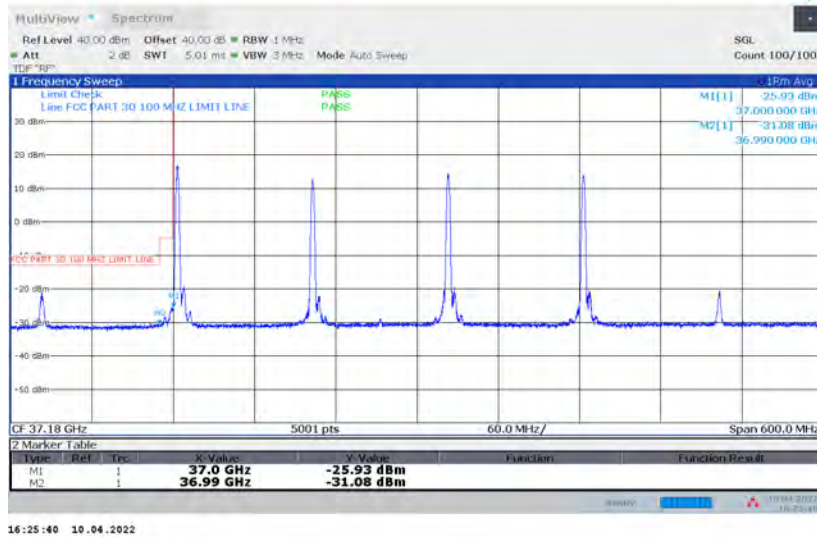

Low-side, Full RB

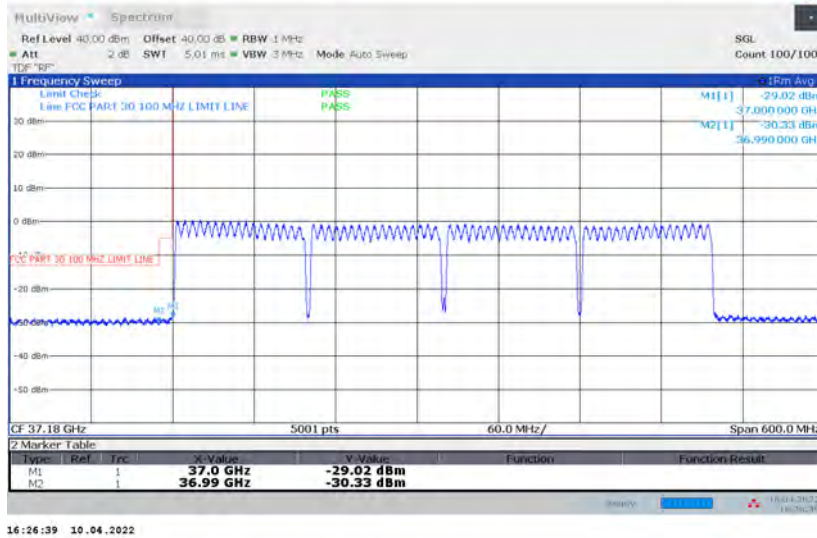

ANT M1, M2 & M3, 100 MHz, MIMO, 4CC, QPSK

Antenna	BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
	(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
M1	100	L	1/0	37	-31.93	-5	-26.93
				36.99	-33.23	-13	-20.23
M2				37	-25.93	-5	-20.93
				36.99	-31.08	-13	-18.08
M3				37	-28.02	-5	-23.02
				36.99	-32.28	-13	-19.28
M1	100	L	66/0	37	-33.44	-5	-28.44
				36.99	-32.58	-13	-19.58
M2				37	-29.02	-5	-24.02
				36.99	-30.33	-13	-17.33
M3				37	-30.87	-5	-25.87
				36.99	-32.15	-13	-19.15
M1	100	H	1/65	40	-30.02	-5	-25.02
				40.01	-30.78	-13	-17.78
M2				40	-23.87	-5	-18.87
				40.01	-27.01	-13	-14.01
M3				40	-26.18	-5	-21.18
				40.01	-29.83	-13	-16.83
M1	100	H	66/0	40	-30.17	-5	-25.17
				40.01	-30.01	-13	-17.01
M2				40	-25.88	-5	-20.88
				40.01	-27.21	-13	-14.21
M3				40	-28.95	-5	-23.95
				40.01	-29.37	-13	-16.37

8.4. RADIATED SPURIOUS EMISSIONS

RULE PART(S)

FCC: §2.1051, §30.203

LIMIT

30.203 - (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower.

TEST PROCEDURE

KDB 842590 D01 Upper Microwave Flexible Use Service v01 Section 4.4.2 and Section 4.4.3. ANSI C63.26-2015 Clause 5.5.4 and Annex C.5.2.

All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits to demonstrate compliance.

RSE was investigated from 30 MHz – 100 GHz on n258 SB1, n258 SB2 and n261 bands, from 30 MHz – 200 GHz on n260 band.

Plots below 18 GHz are corrected field strength levels, measured at 3 meter test distance. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $E (dB\mu V/m) = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement.

RSEs from 1 – 200 GHz were measured at 1.5 meters height.

RSEs above 18 GHz were measured at the appropriate far field distances listed on Section 5 on this report (FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE). RSEs from 18 – 50 GHz were measured using a spectrum analyzer or EMI receiver with an internal preamplifier when applicable. Emissions above 50 GHz were measured using a harmonic mixer or a downconverter with spectrum analyzer, while an external LNA was used when applicable.

EIRP of RSE was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factor of cable loss, horn antenna gain, harmonic mixer loss, LNA gain and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Mixer Loss (dB)} \\ &\quad - \text{LNA Gain (dB)} + \text{Path Loss (dB)} \\ &= 4 - 23 + 12 - 30 + 71 \\ &= 34 \text{ dB}\end{aligned}$$

$EIRP = P_{\text{measured}}(dBm)$, where Total Correction Factor preloaded.

RSEs were measured using the configuration with the highest EIRP (QPSK, SISO-Dual mode and a single mid-RB) as representing the worst case. Preliminary radiated emissions tests at the low, middle and high channels indicated that the worst case radiated spurious emissions were on the channel with the highest EIRP and so only the test data for that channel is included in this report.

The following configurations with highest EIRP from Ant M2 and Ant M3 in each frequency band were used at RSE investigation at the pre-determined worst-case y-axis (portrait) orientation:

n258 SB1 band:

M2: SISO-DUAL_QPSK_50 MHz BW_Low CH_RB Offset 1/15 (1RB-M)

M3: SISO-DUAL_QPSK_50 MHz BW_High CH_RB Offset 1/15 (1RB-M)

n258 SB2 band:

M2: SISO-DUAL_QPSK_50 MHz BW_Low CH_RB Offset 1/15 (1RB-M)

M3: SISO-DUAL_QPSK_50 MHz BW_High CH_RB Offset 1/15 (1RB-M)

n261 band:

M2: SISO-DUAL_QPSK_50 MHz BW_High CH_RB Offset 1/15 (1RB-M)

M3: SISO-DUAL_QPSK_50 MHz BW_Mid CH_RB Offset 1/15 (1RB-M)

n260 band:

M2: SISO-DUAL_QPSK_100 MHz BW_Mid CH_RB Offset 1/32 (1RB-M)

M3: SISO-DUAL_QPSK_50 MHz BW_Low CH_RB Offset 1/15 (1RB-M)

In addition, the 2CC to 4CC multi-carrier operations were verified for IMD product at the near upper and lower band edge regions, approximately 1 GHz wide. The measurements were made with the single RB active in each channel and plots showing the IMD product are provided. Both (50 MHz + 50 MHz) and (100 MHz + 100 MHz) channel bandwidths are tested and the signal level of the IMD products are similar for both modes. Antenna gain of EUT is not factored into the EIRP calculation of IMD product measurements. The test data for the worst case IMD emissions are reported.

Where the measured EIRP value is above the TRP limit, a TRP measurement is made. Otherwise, the EIRP value is compared with the §30.203 TRP limits to demonstrate compliance.

For simultaneous transmission of multiple channels in the Wifi bands and 5G FR2 bands, no noticeable new emission was found.

RESULTS


See the following pages.

Employee IDs: 19437, 19459, 24303, 25368, 27446, 27780

Test Date: 3/4/22 – 5/7/22

Test Locations: Chambers 1, 2, 3, B

8.4.1. RSE n258 SB1 30 – 1000 MHz

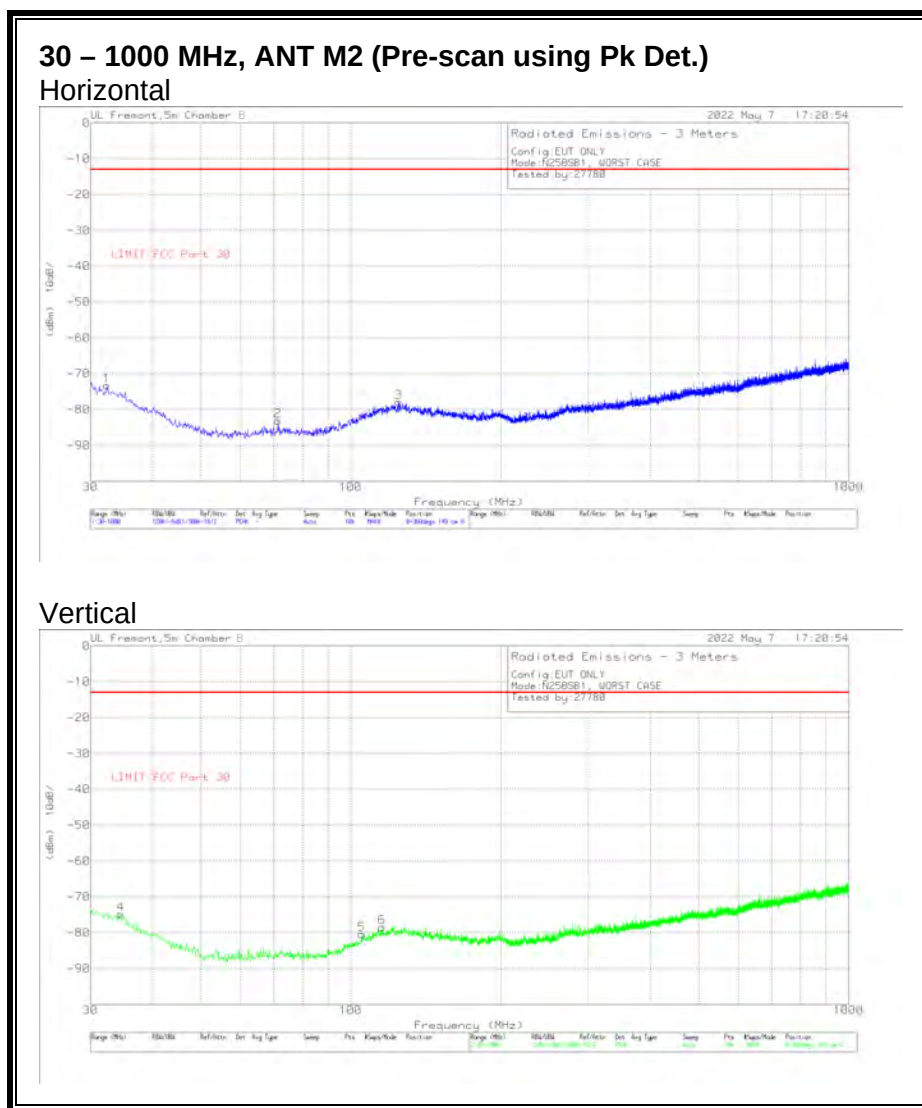


Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.328	-78.67	Pk	25.2	-31.5	11.7	-73.27	-13	-60.27	0-360	149	H
4	34.462	-78.66	Pk	23.7	-31.5	11.7	-74.76	-13	-61.76	0-360	149	V
2	71.419	-77.55	Pk	13.8	-31.1	11.7	-83.15	-13	-70.15	0-360	149	H
5	105.175	-78.9	Pk	17.5	-30.8	11.7	-80.5	-13	-67.5	0-360	149	V
6	115.554	-78.9	Pk	19.4	-30.7	11.7	-78.5	-13	-65.5	0-360	149	V
3	124.769	-78.94	Pk	19.9	-30.6	11.7	-77.94	-13	-64.94	0-360	149	H

Pk - Peak detector

30 – 1000 MHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

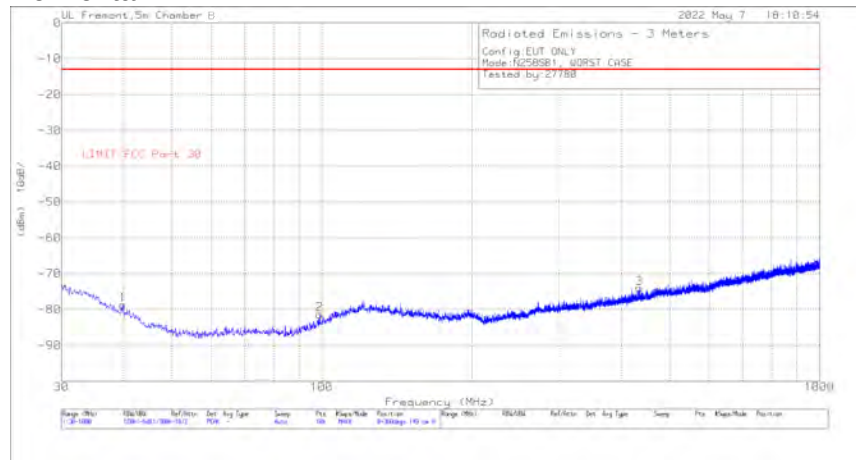

Vertical

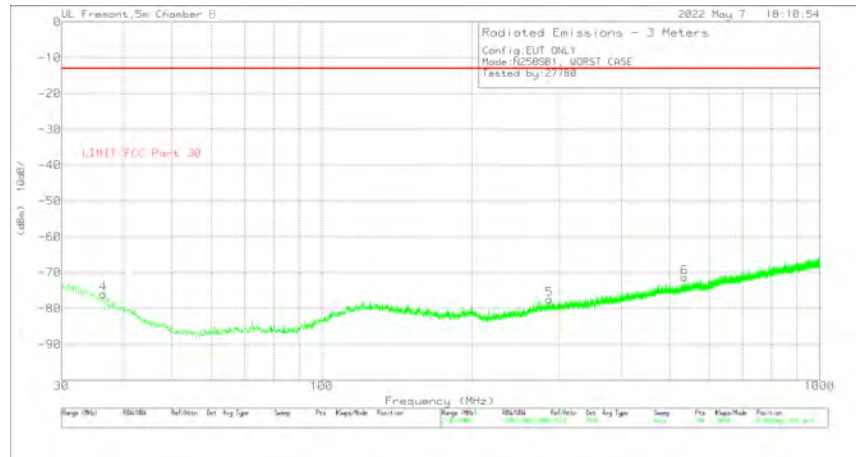


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	36.402	-77.93	Pk	21.8	-31.5	11.7	-75.93	-13	-62.93	0-360	149	V
1	39.797	-78.51	Pk	19.5	-31.4	11.7	-78.71	-13	-65.71	0-360	149	H
2	99.064	-78.23	Pk	16	-30.8	11.7	-81.33	-13	-68.33	0-360	149	H
5	286.662	-78.62	Pk	19.2	-29.7	11.7	-77.42	-13	-64.42	0-360	149	V
3	434.878	-78.81	Pk	22.2	-29.2	11.7	-74.11	-13	-61.11	0-360	149	H
6	535.176	-77.94	Pk	23.8	-28.9	11.7	-71.34	-13	-58.34	0-360	149	V

Pk - Peak detector

8.4.2. RSE n258 SB1 1 - 18 GHz

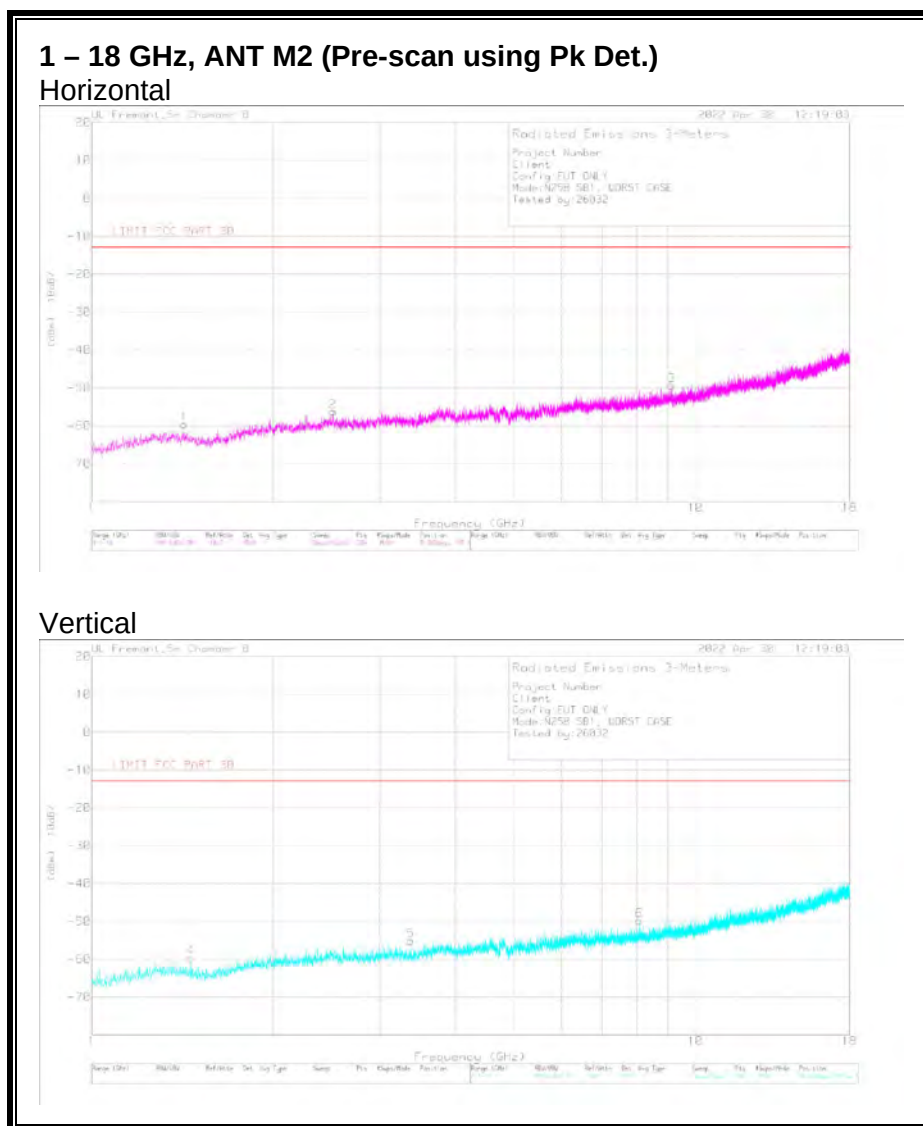

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.422471	-65.46	Pk	29	-34.9	11.7	-59.66	-13	-46.66	0-360	150	H
4	1.459023	-64.99	Pk	28.5	-34.9	11.7	-59.69	-13	-46.69	0-360	150	V
2	2.511376	-65.96	Pk	32.7	-34.7	11.7	-56.26	-13	-43.26	0-360	150	H
5	3.37417	-65.86	Pk	32.6	-33.6	11.7	-55.16	-13	-42.16	0-360	150	V
6	8.066407	-71.28	Pk	35.9	-26.1	11.7	-49.78	-13	-36.78	0-360	150	V
3	9.137462	-73.18	Pk	36.4	-24.3	11.7	-49.38	-13	-36.38	0-360	150	H

Pk - Peak detector

1 – 18 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal



Vertical

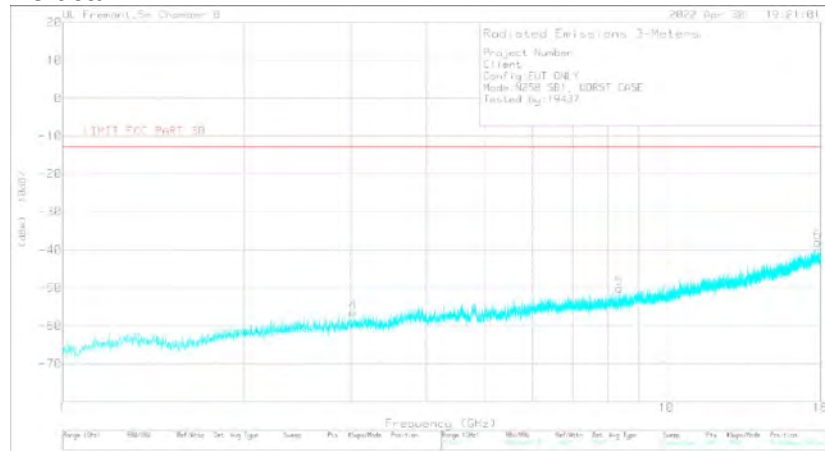


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.543678	-65.98	Pk	32.5	-34.7	11.7	-56.48	-13	-43.48	0-360	150	H
4	3.027353	-66.98	Pk	33	-34.2	11.7	-56.48	-13	-43.38	0-360	150	V
2	4.828594	-68.81	Pk	34.1	-30.3	11.7	-53.31	-13	-40.31	0-360	150	H
5	8.355422	-71.88	Pk	35.9	-25.8	11.7	-50.08	-13	-37.08	0-360	150	V
3	16.776798	-74.99	Pk	41.9	-17.9	11.7	-39.29	-13	-26.29	0-360	150	H
6	17.8079	-74.46	Pk	41.5	-16.8	11.7	-38.06	-13	-25.06	0-360	150	V


Pk - Peak detector

8.4.3. RSE n258 SB1 18 - 23 GHz

18 - 23 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

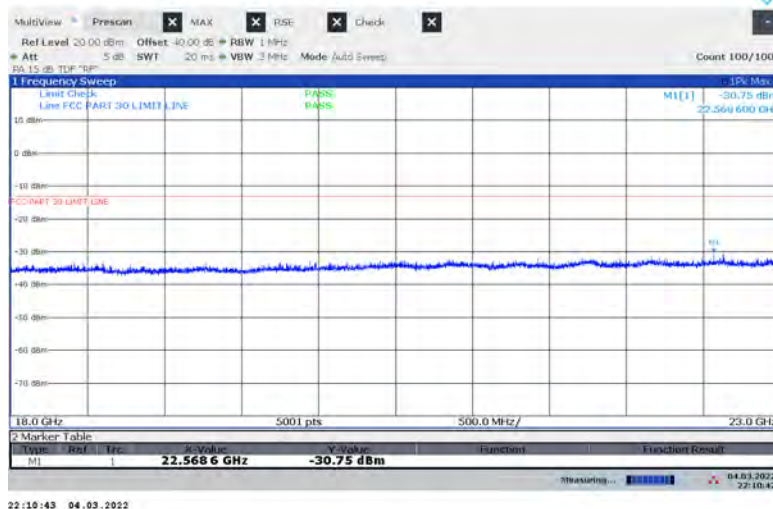


18 - 23 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

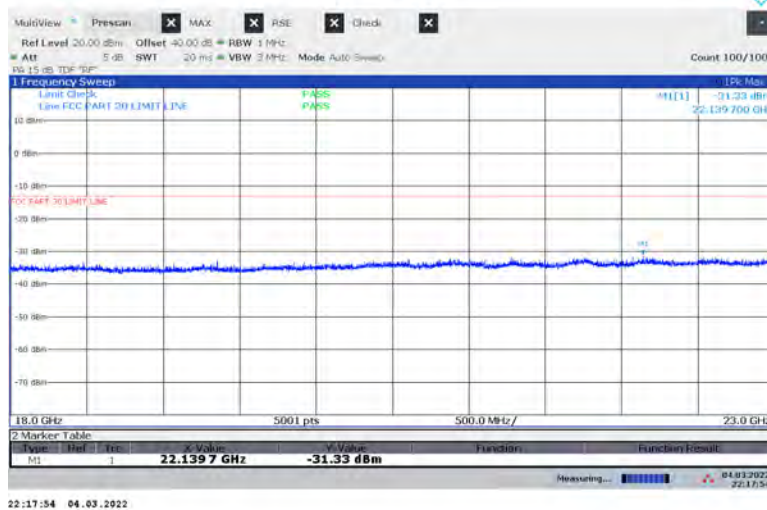


No emission detected using Peak Detection.

18 - 23 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

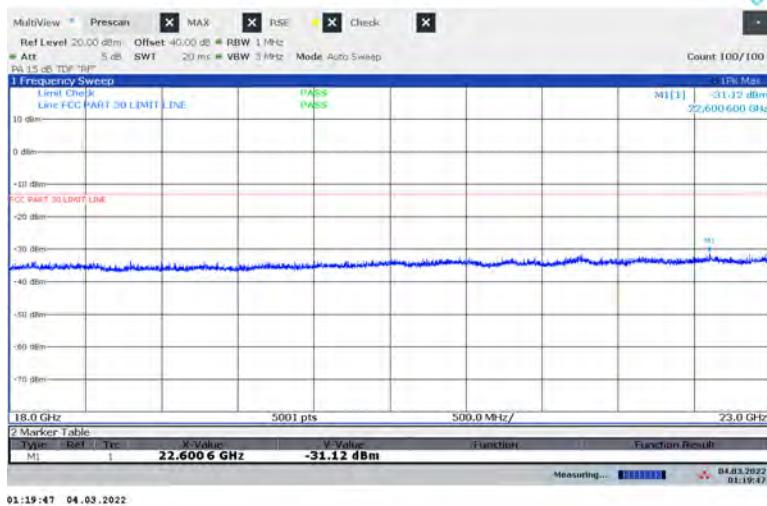


18 - 23 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

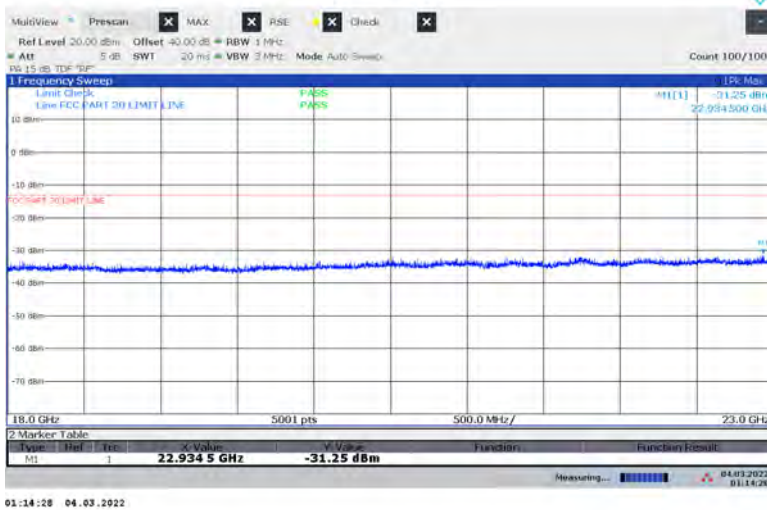


No emission detected using Peak Detection.

8.4.4. RSE n258 SB1 23 - 24.25 GHz

23 - 24.25 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

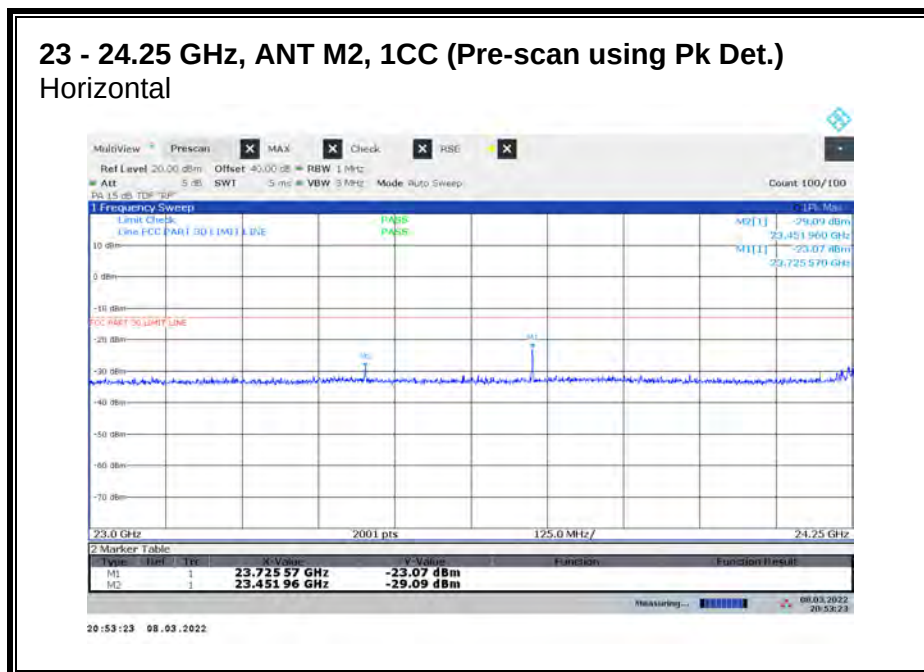


23 - 24.25 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

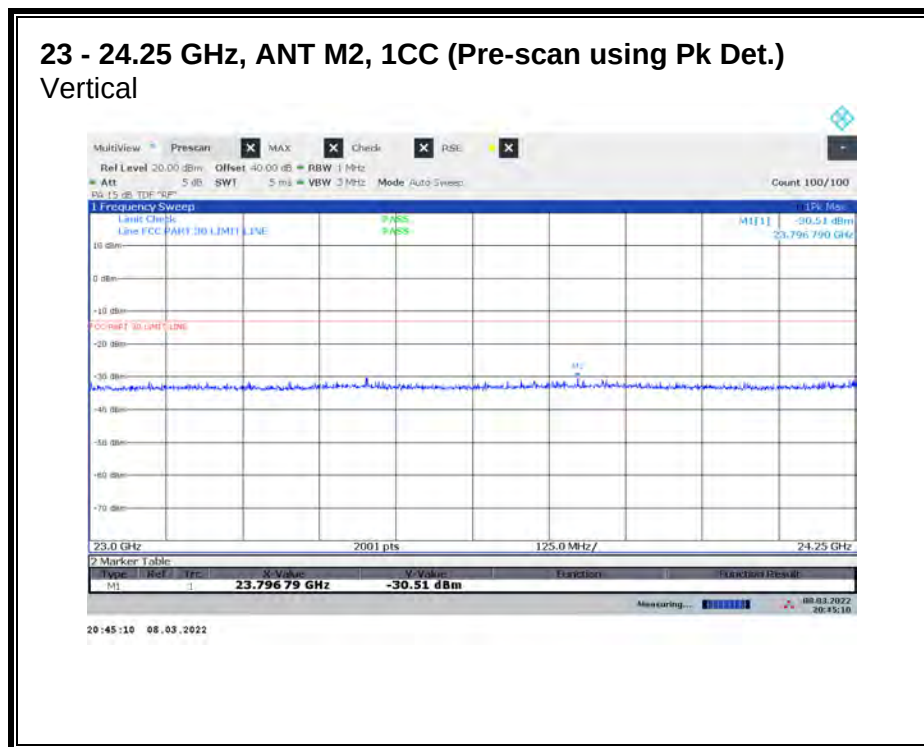

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

23 - 24.25 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

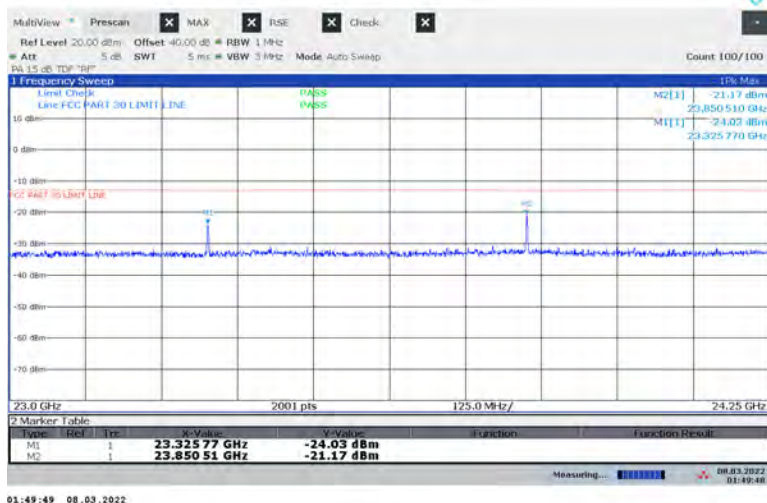

23 - 24.25 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical




Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

18 - 24.25 GHz n258 SB1, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	23.726	3.5	H	-33.61	-13	-20.61
M2	23.726	3.5	V	-40.08	-13	-27.08
M2	23.452	3.5	H	-38.61	-13	-25.61
M2	23.452	3.5	V	-42.26	-13	-29.26
M3	23.326	3.5	H	-31.75	-13	-18.75
M3	23.326	3.5	V	-44.06	-13	-31.06
M3	23.851	3.5	H	-37.05	-13	-24.05
M3	23.851	3.5	V	-43.14	-13	-30.14

23 - 24.25 GHz n258 SB1, 2CC

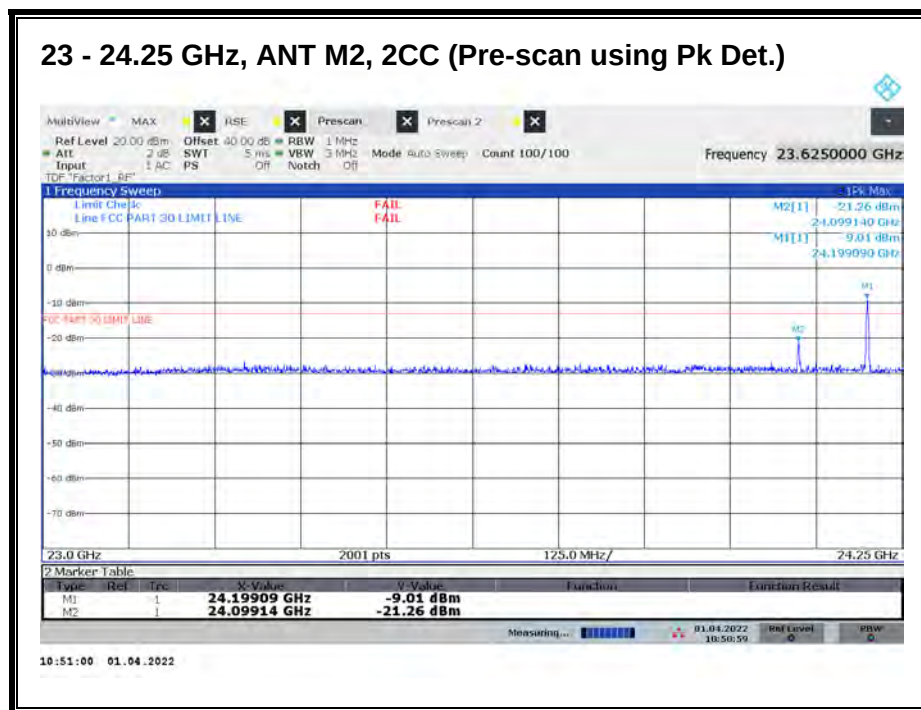


Worst case configuration:

SISO-DUAL_QPSK (100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.199	3.5	--	-17.36	-13	-4.36

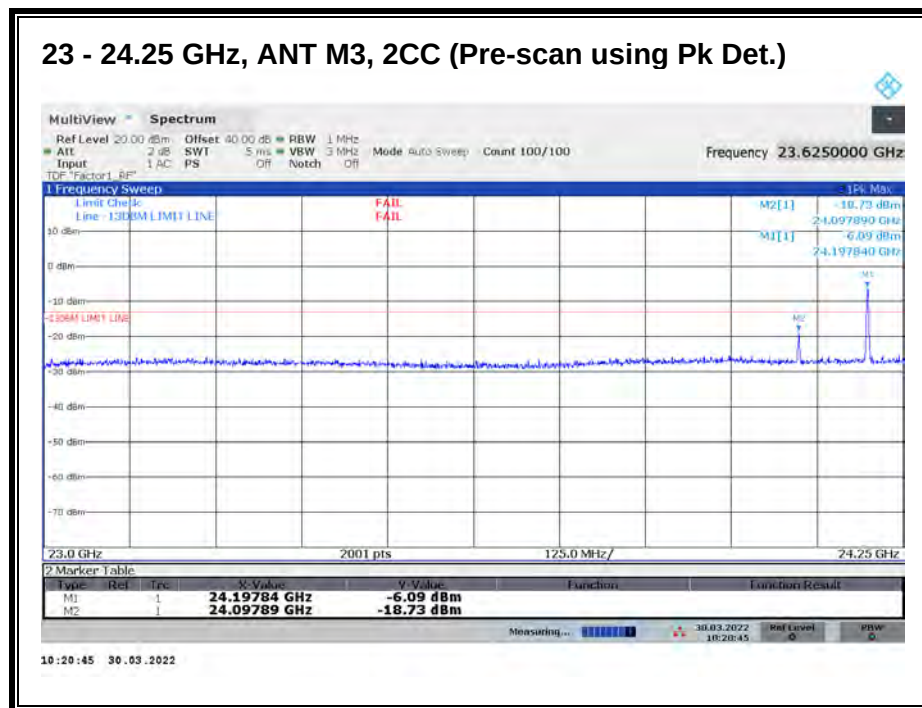

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.199	3.5	--	-16.29	-13	-3.29

23 - 24.25 GHz n258 SB1, 3CC

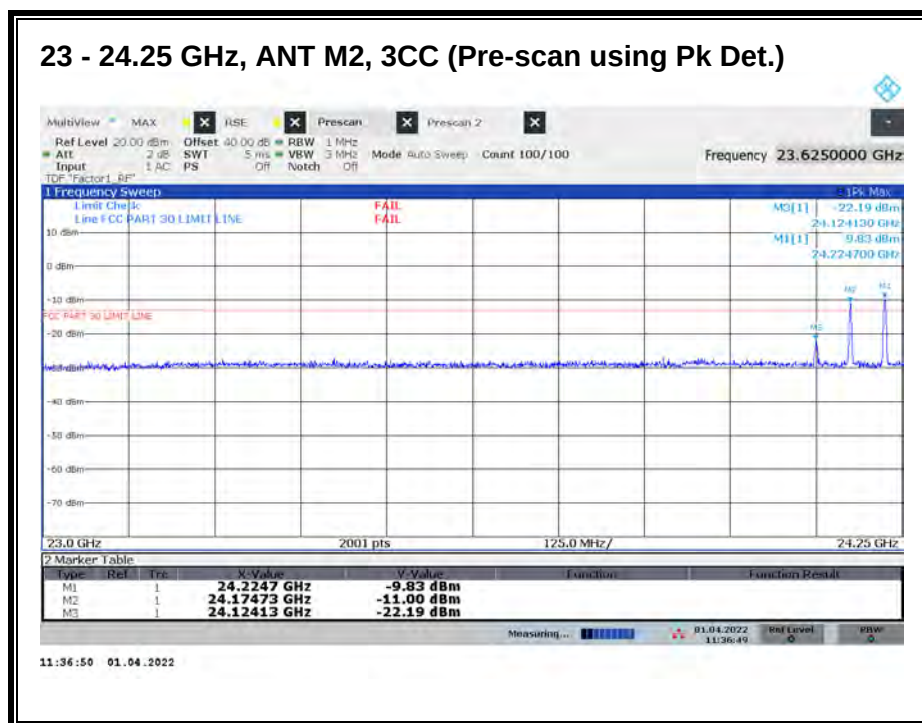


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.224	3.5	--	-16.09	-13	-3.09

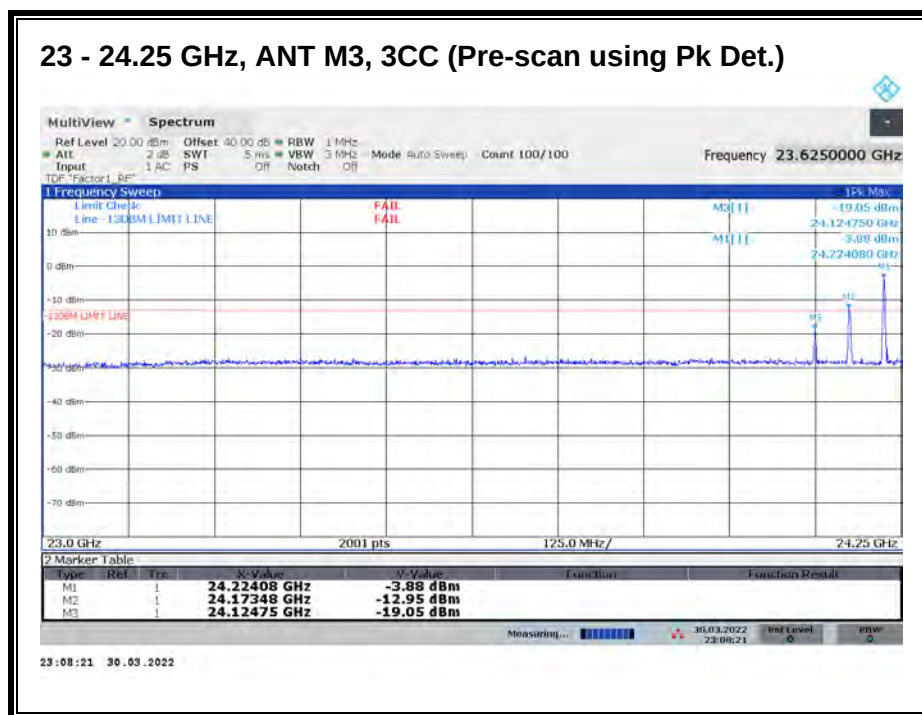

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.224	3.5	--	-14.21	-13	-1.21

23 - 24.25 GHz n258 SB1, 4CC

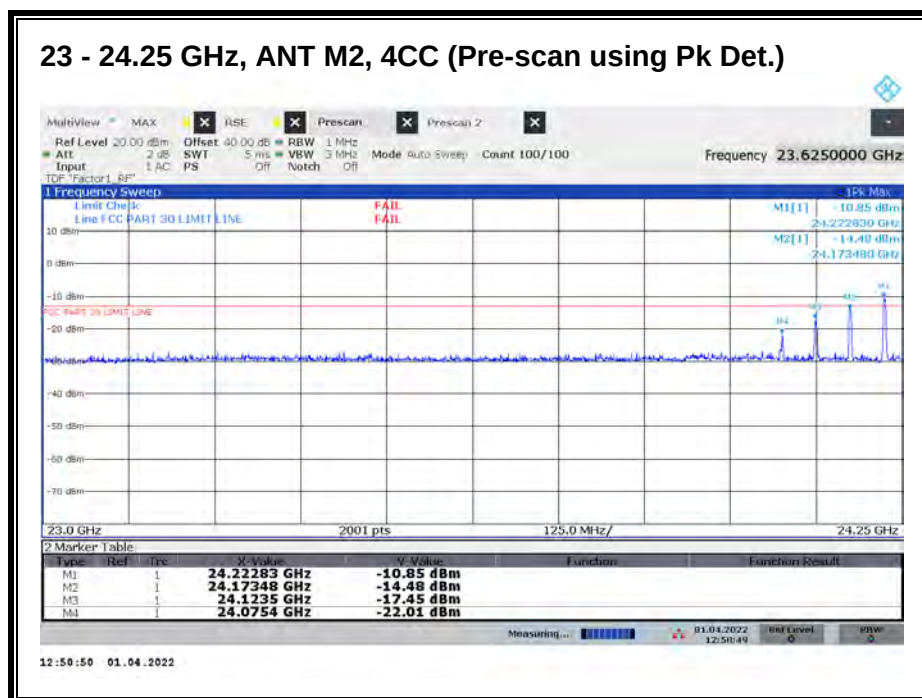


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.224	3.5	--	-17.19	-13	-4.19

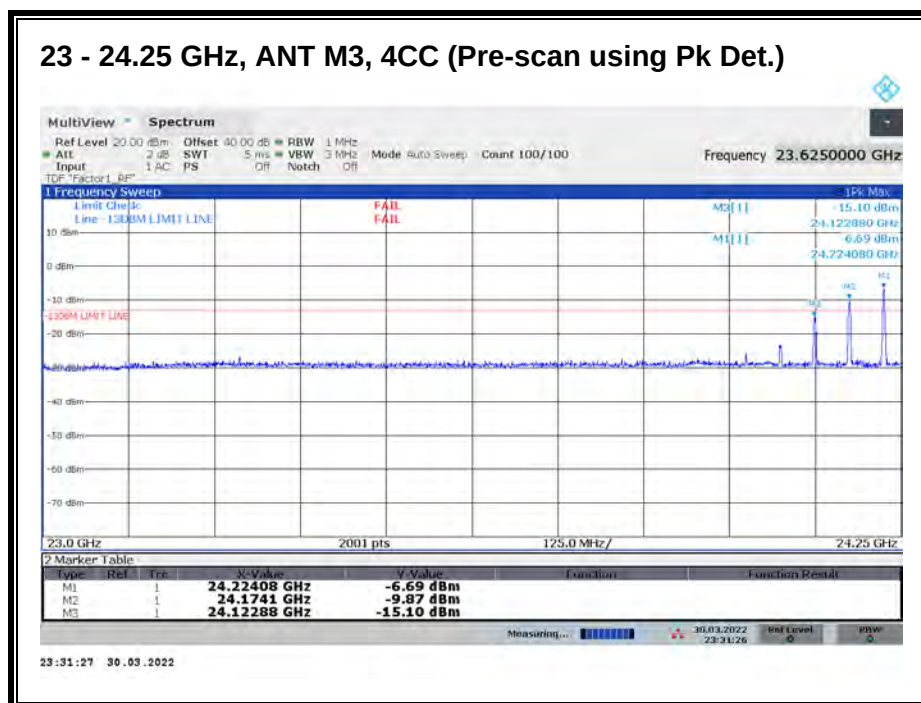

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.


All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.224	3.5	--	-14.42	-13	-1.42


8.4.5. RSE n258 SB1 24.45 - 25.5 GHz

Note: 24.25 – 24.45 GHz covered by Fundamental and BE measurements.

24.45 - 25.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

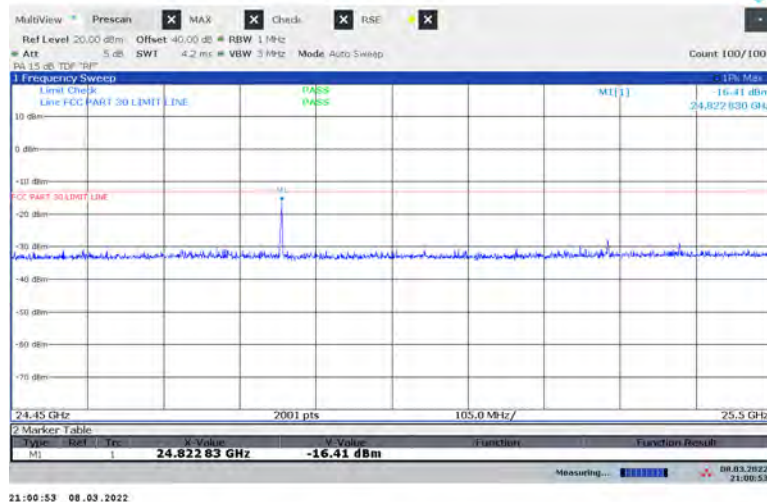

24.45 - 25.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

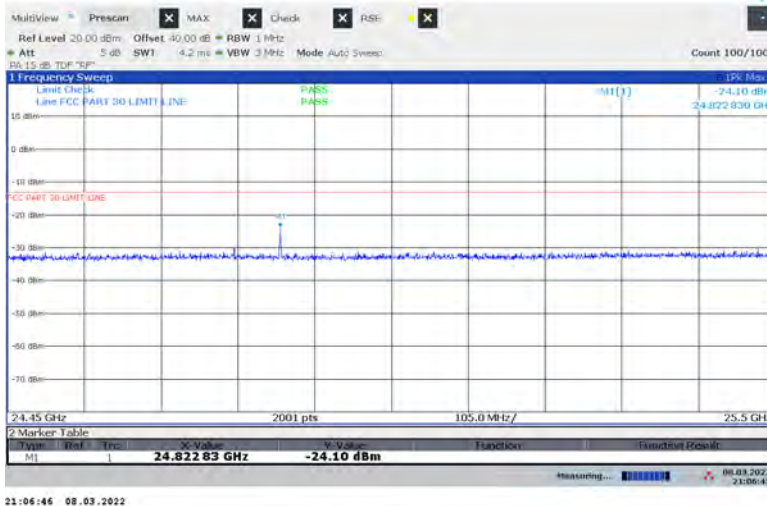


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

24.45 - 25.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.) Horizontal



24.45 - 25.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.) Vertical

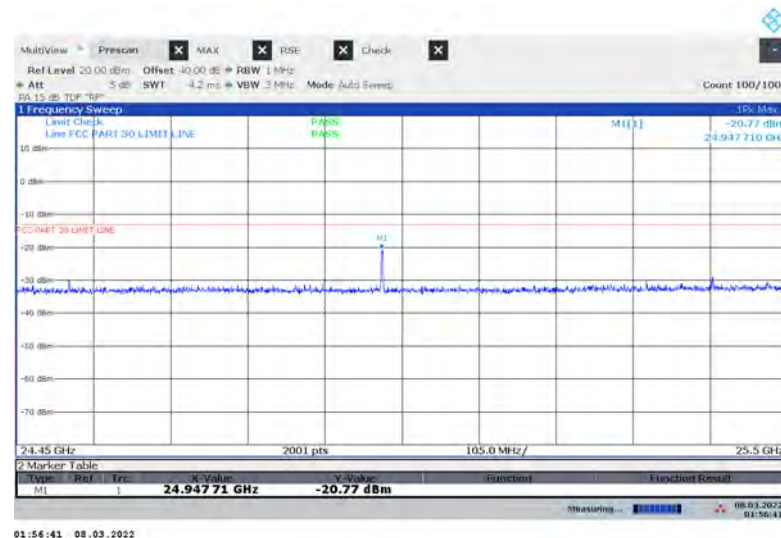


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

24.45 - 25.5 GHz n258 SB1, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.823	3.5	H	-30.43	-13	-17.43
M2	24.823	3.5	V	-31.21	-13	-18.21
M3	24.947	3.5	H	-25.96	-13	-12.96
M3	24.947	3.5	V	-30.29	-13	-17.29

24.45 – 25.5 GHz n258 SB1, 2CC

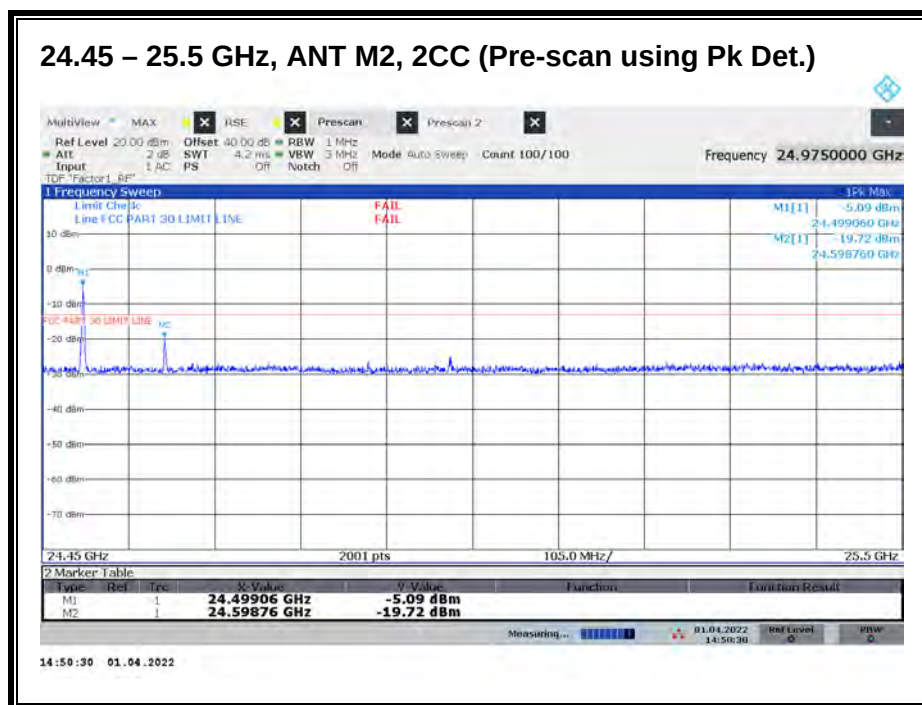


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.499	3.5	--	-15.78	-13	-2.78

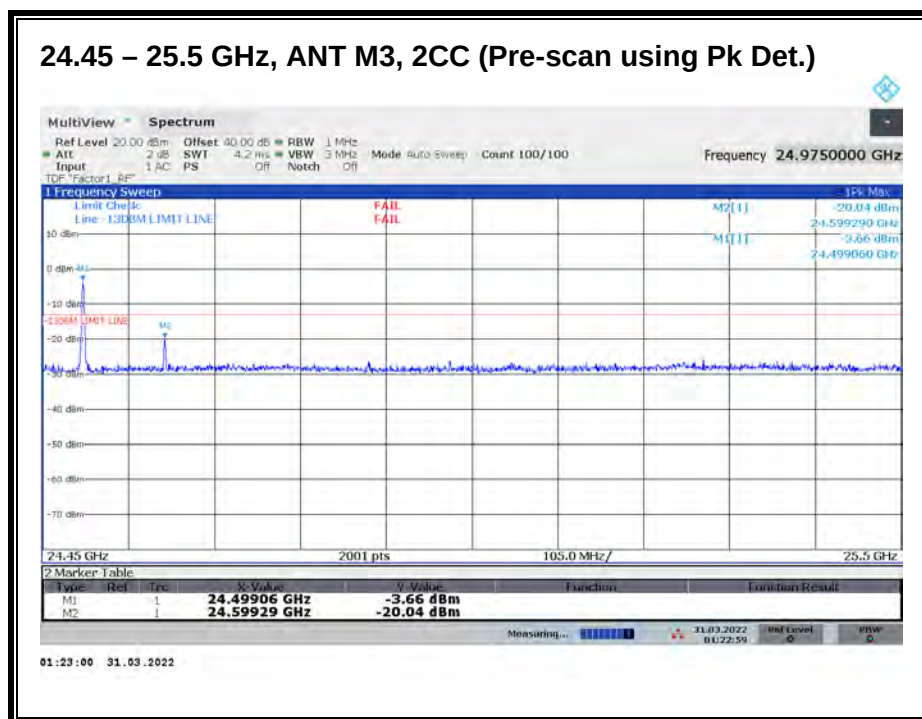

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.499	3.5	--	-13.09	-13	-0.09

24.45 – 25.5 GHz n258 SB1, 3CC

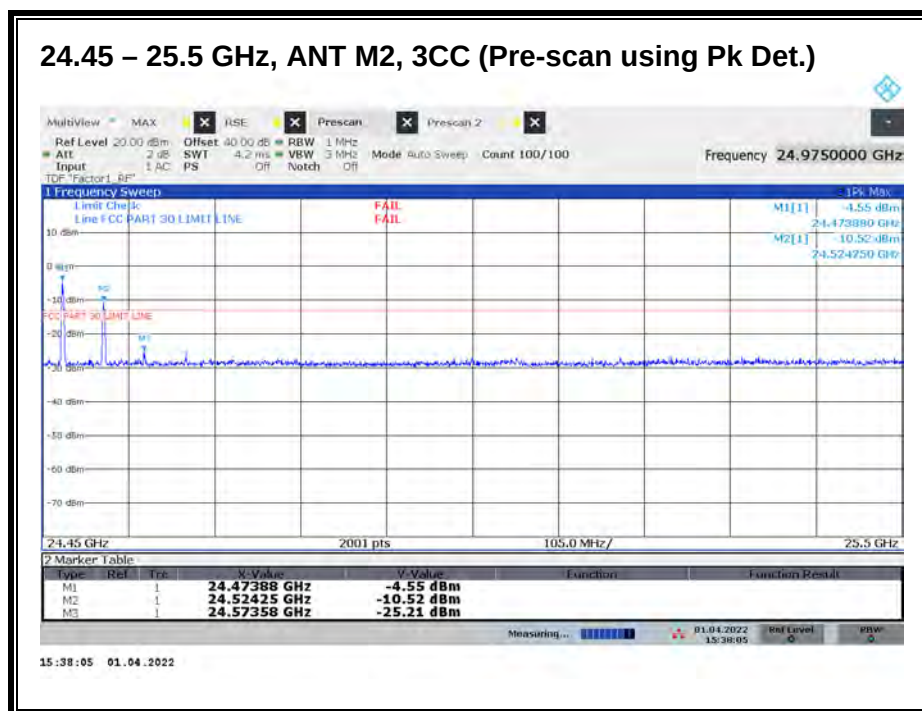


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.474	3.5	--	-16.16	-13	-3.16

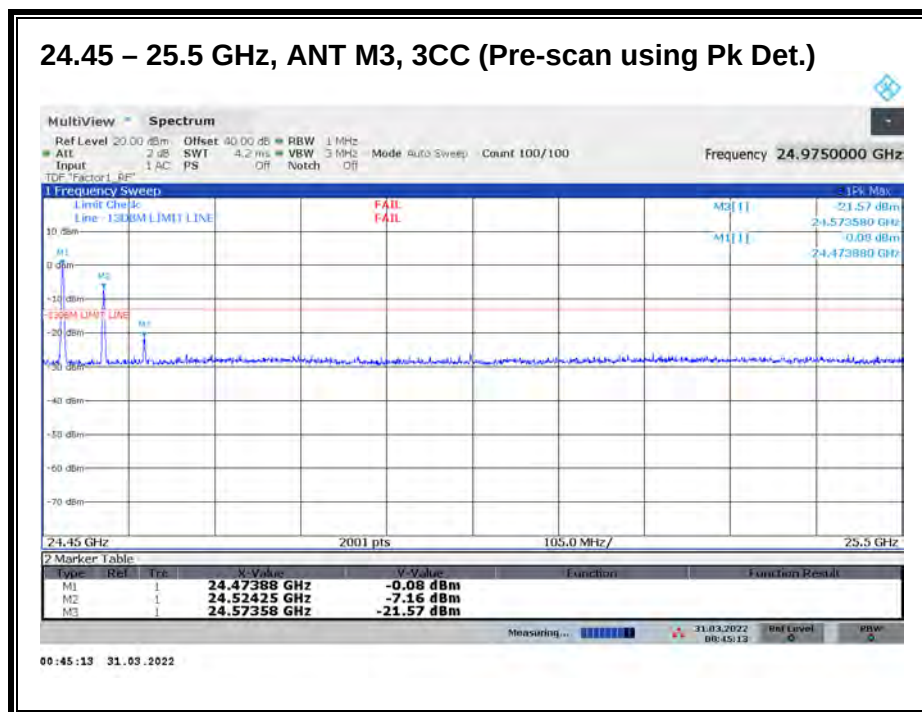

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.725	3.5	--	-19.83	-13	-6.83

24.45 – 25.5 GHz n258 SB1, 4CC

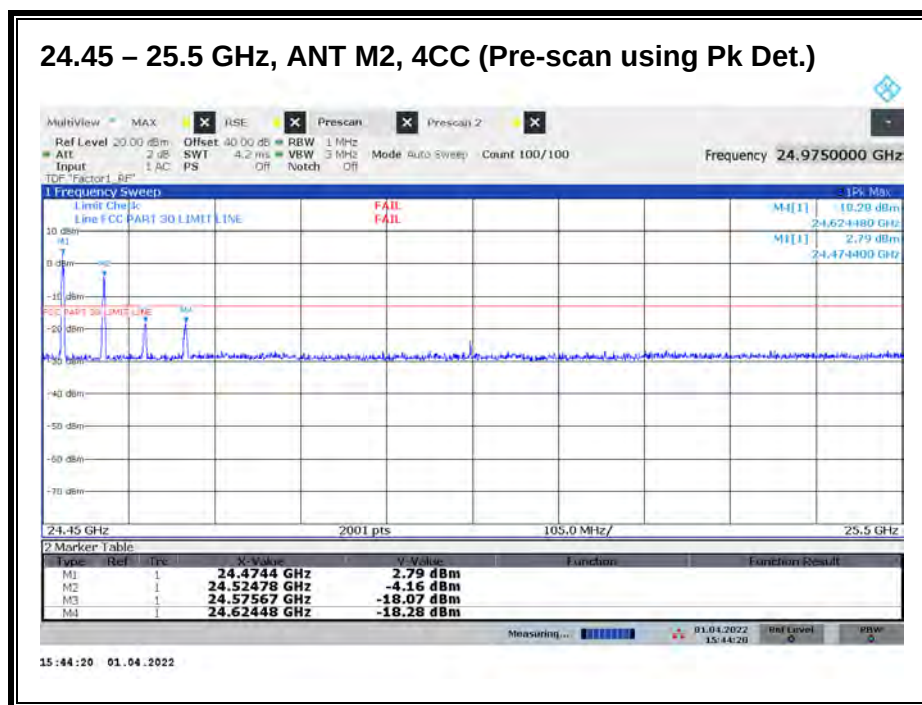


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.474	3.5	--	-16.38	-13	-3.38

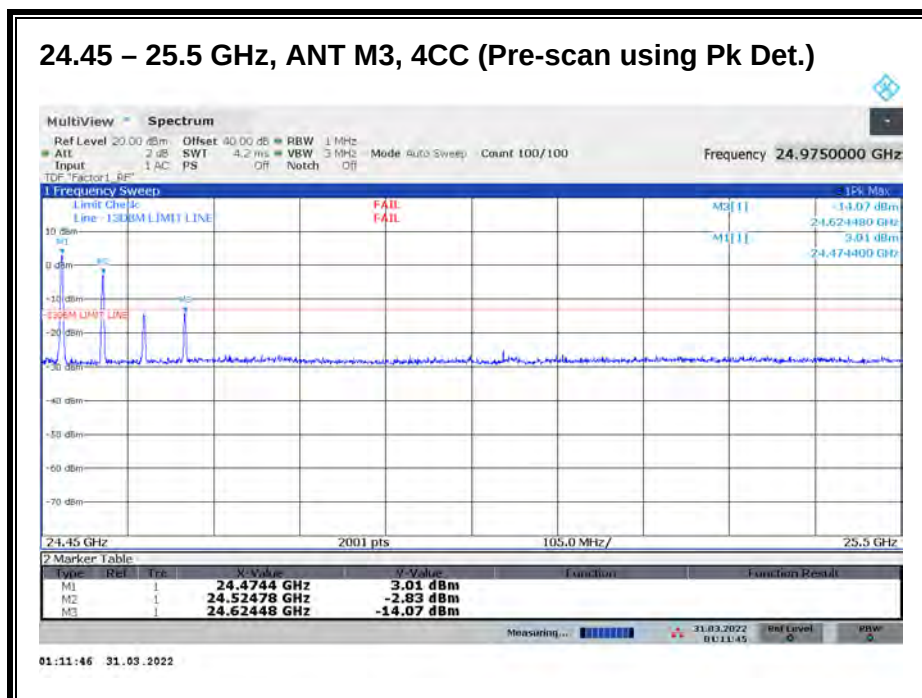

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz+ 50 MHz)_High CH_RB Offset 1/15 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.474	3.5	--	-19.03	-13	-6.03

8.4.6. RSE n258 SB1 25.5 - 26.5 GHz

25.5 – 26.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

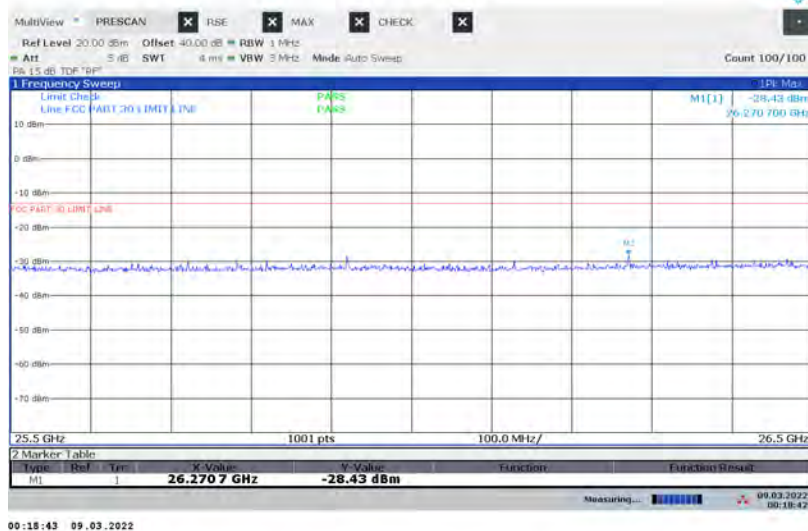


25.5 - 26.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

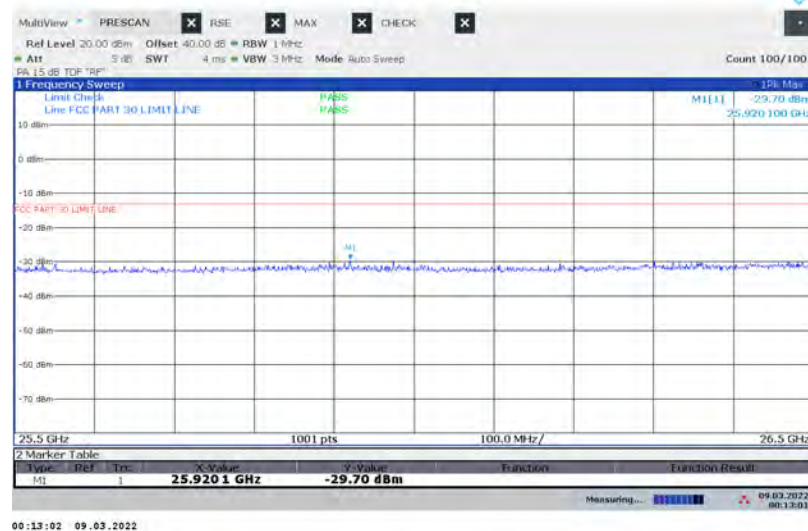


No emission detected using Peak Detection.

25.5 – 26.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

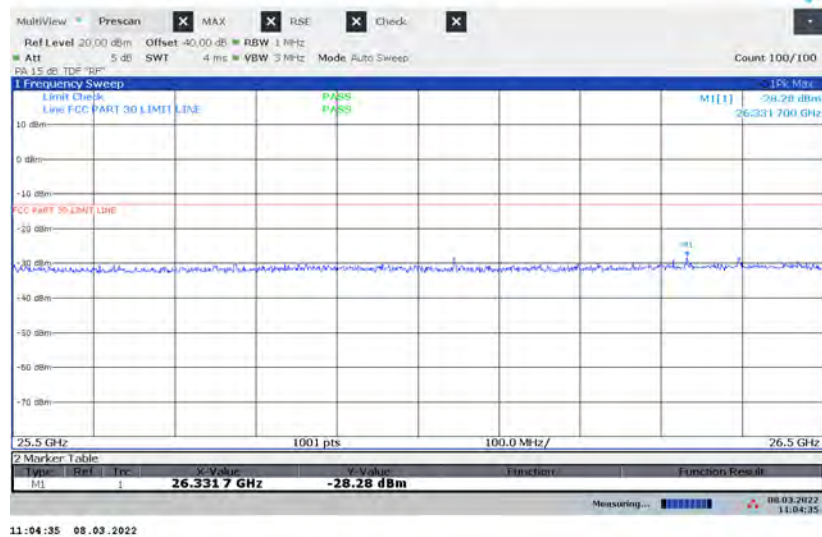


25.5 - 26.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

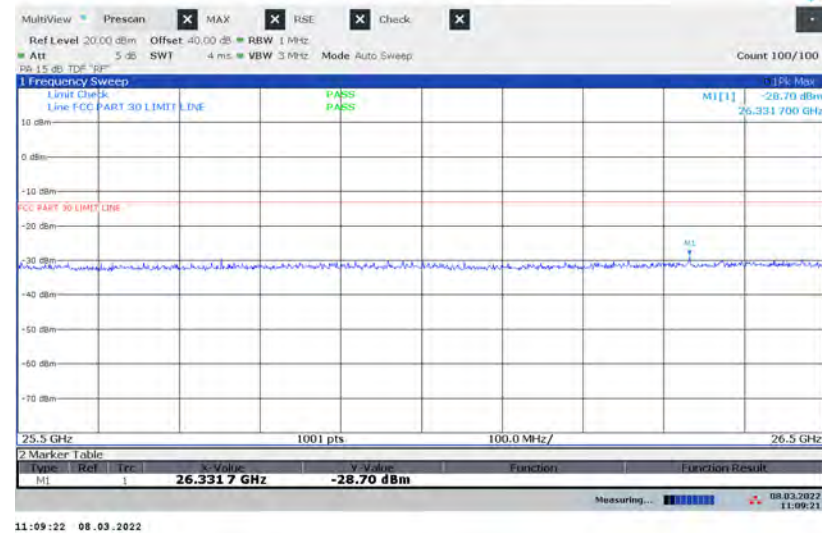


No emission detected using Peak Detection.

8.4.7. RSE n258 SB1 26.5 - 40 GHz

26.5 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

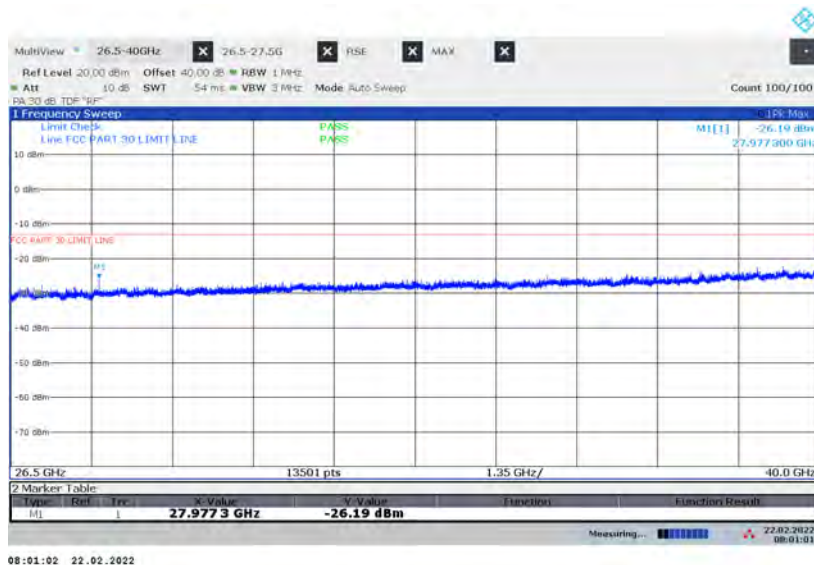


26.5 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

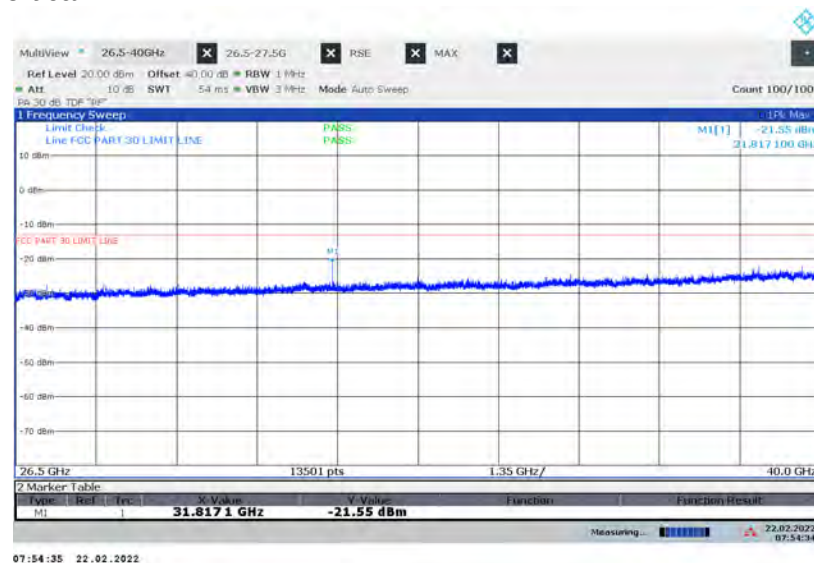


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 - 40 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

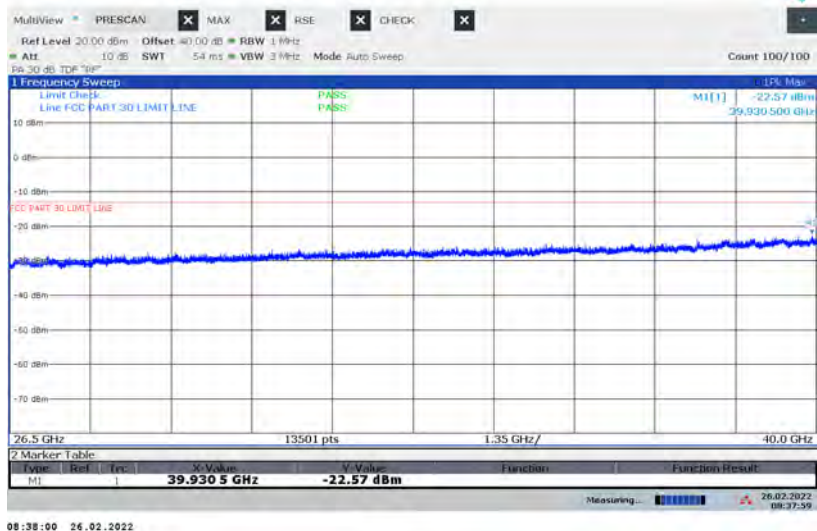

26.5 - 40 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical

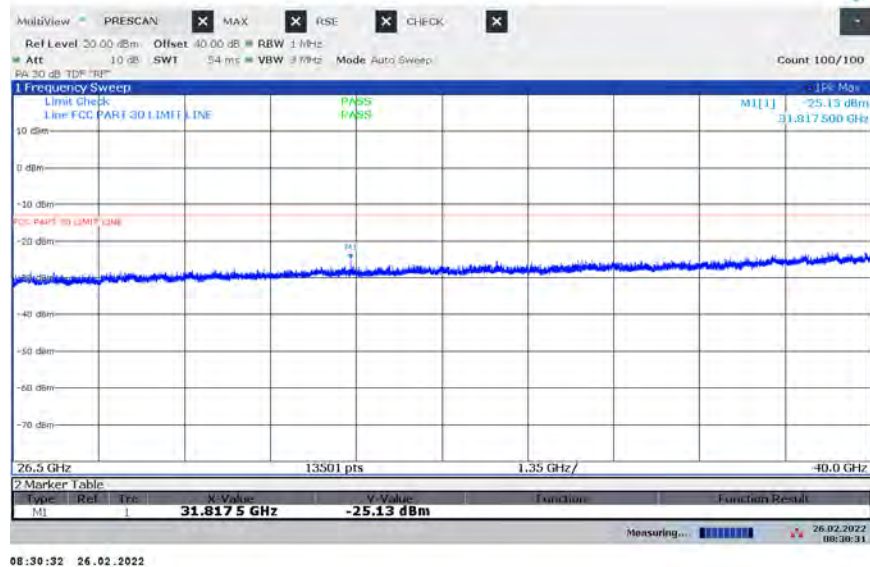


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 – 40 GHz n258 SB1, 1CC


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	27.977	3	H	-29.53	-13	-16.53
M2	27.977	3	V	-35.30	-13	-22.30
M2	31.817	3	H	-31.02	-13	-18.02
M2	31.817	3	V	-22.91	-13	-9.91
M3	31.817	3	H	-36.33	-13	-23.33
M3	31.817	3	V	-28.41	-13	-15.41

8.4.8. RSE n258 SB1 40 - 50 GHz

40 – 50 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

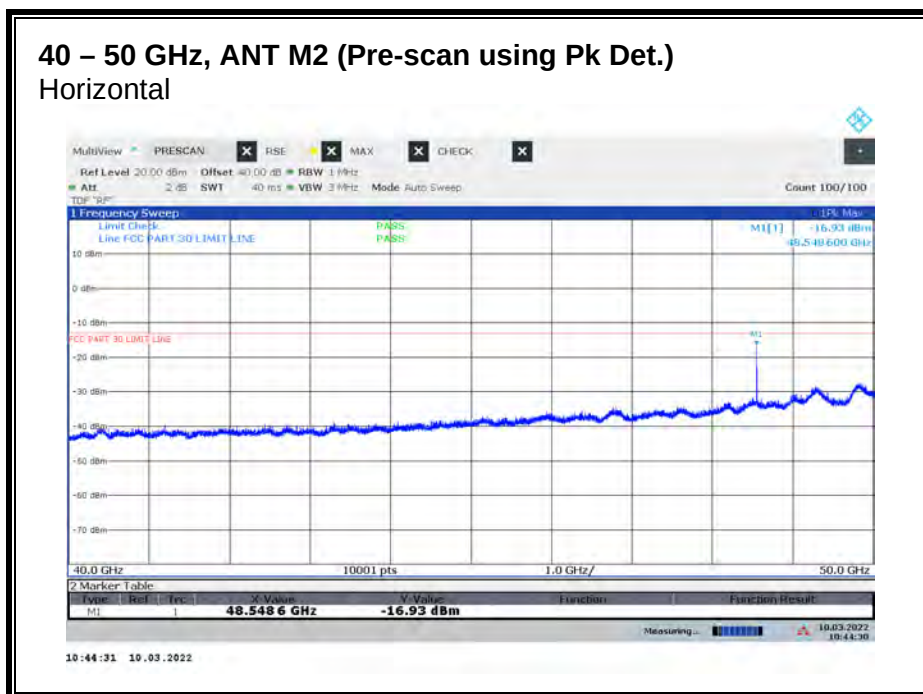


40 – 50 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

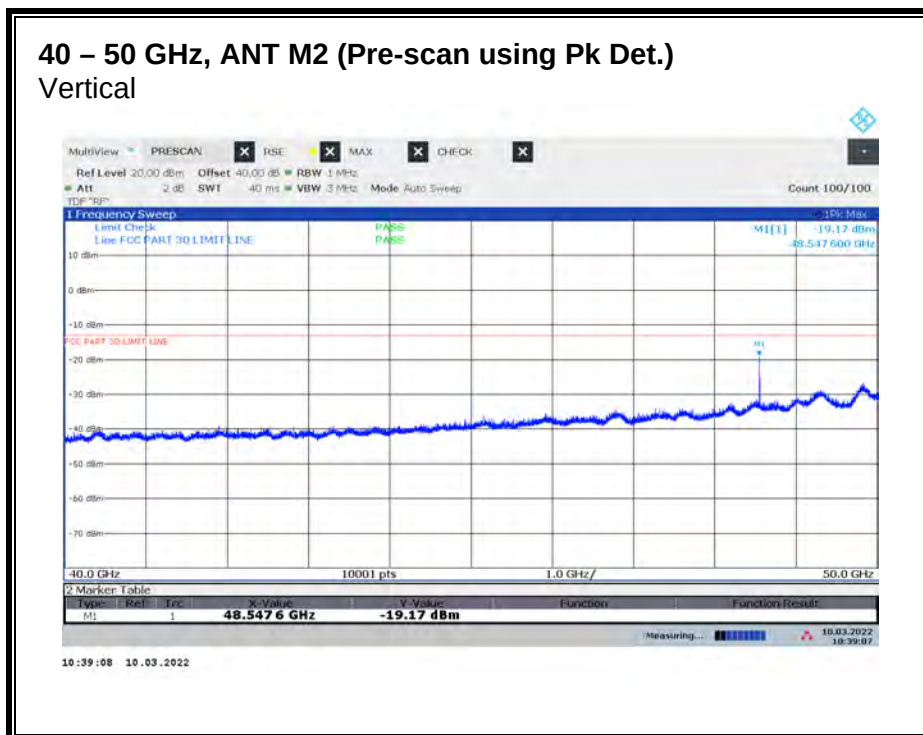


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.)
Horizontal

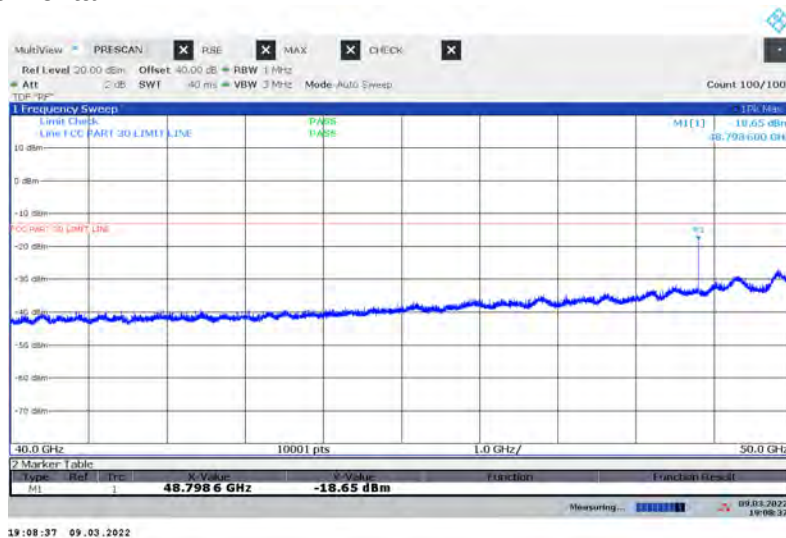

40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.)
Vertical

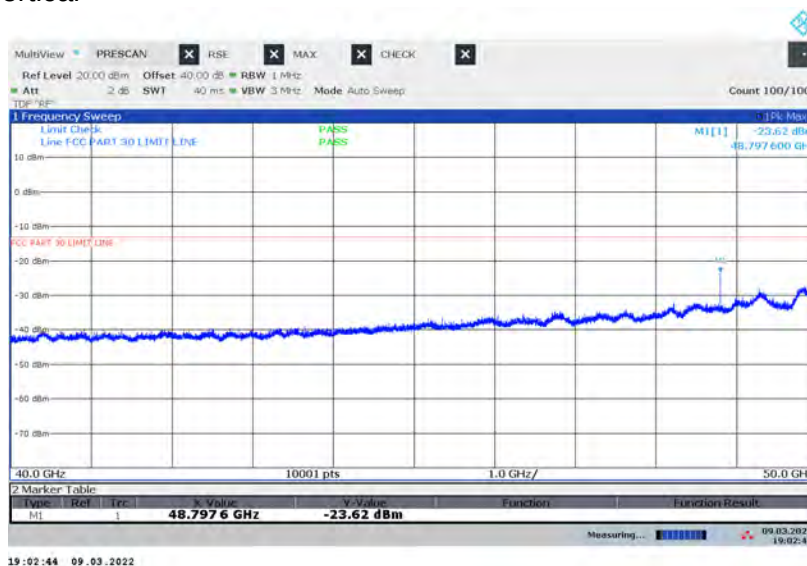

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

40 – 50 GHz n258 SB1, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	48.548	3	H	-19.69	-13	-6.69
M2	48.548	3	V	-29.89	-13	-16.89
M3	48.798	3	H	-23.01	-13	-10.01
M3	48.798	3	V	-39.80	-13	-26.80

8.4.9. RSE n258 SB1 50 - 75 GHz

50 - 75 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal



50 - 75 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical



Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

50 - 75 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal



50 - 75 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical




Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

50 - 75 GHz n258 SB1


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dBm)	(dB)
M2	72.822	1.5	H	-34.39	--	-13	-21.39
M2	72.822	1.5	V	-17.27	--	-13	-4.27
M3	73.198	1.5	--	--	-18.84	-13	-5.84

8.4.10. RSE n258 SB1 75 - 100 GHz

75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

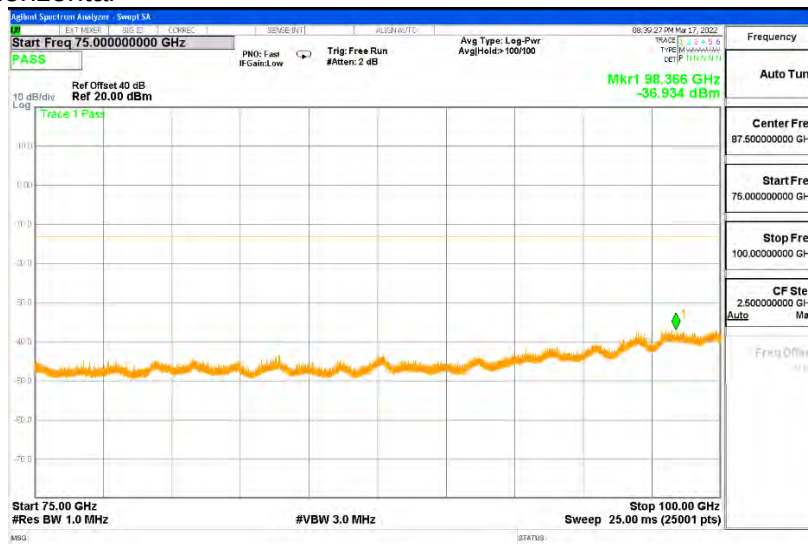


75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

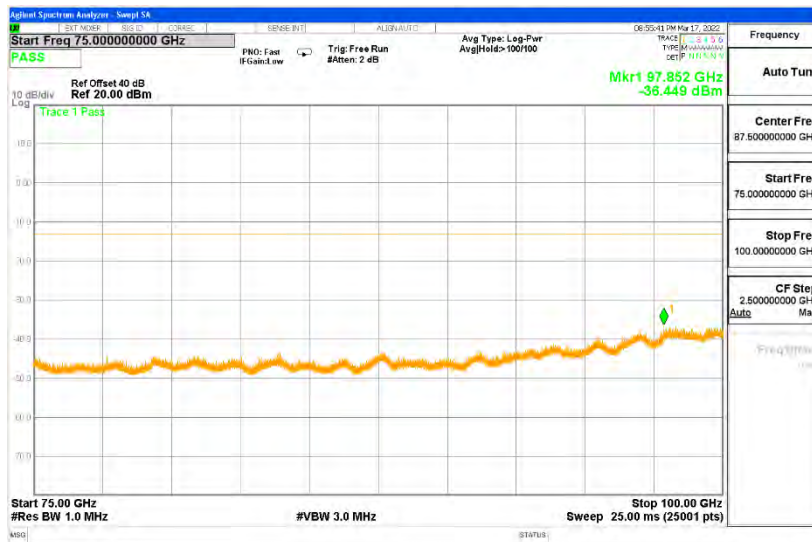


No emission detected using Peak Detection.

75 - 100 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

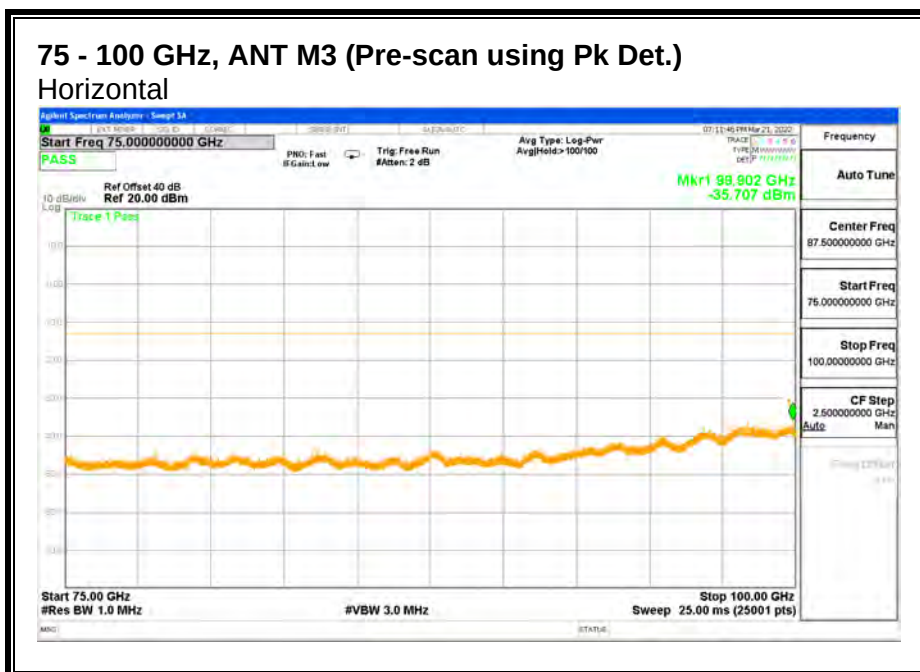


75 - 100 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical

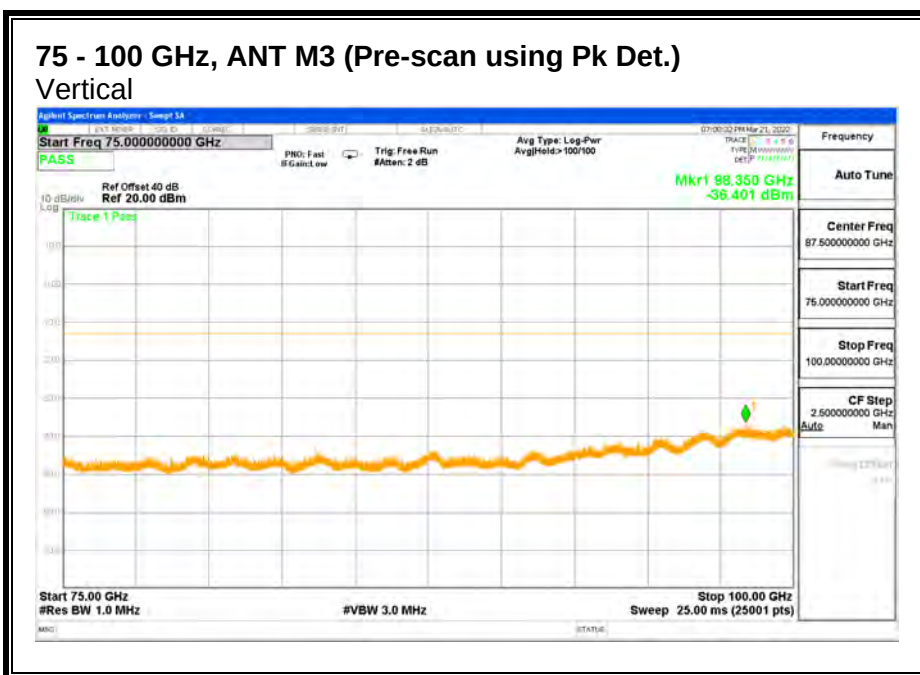

No emission detected using Peak Detection.

8.4.11. RSE n258 SB2 30 – 1000 MHz

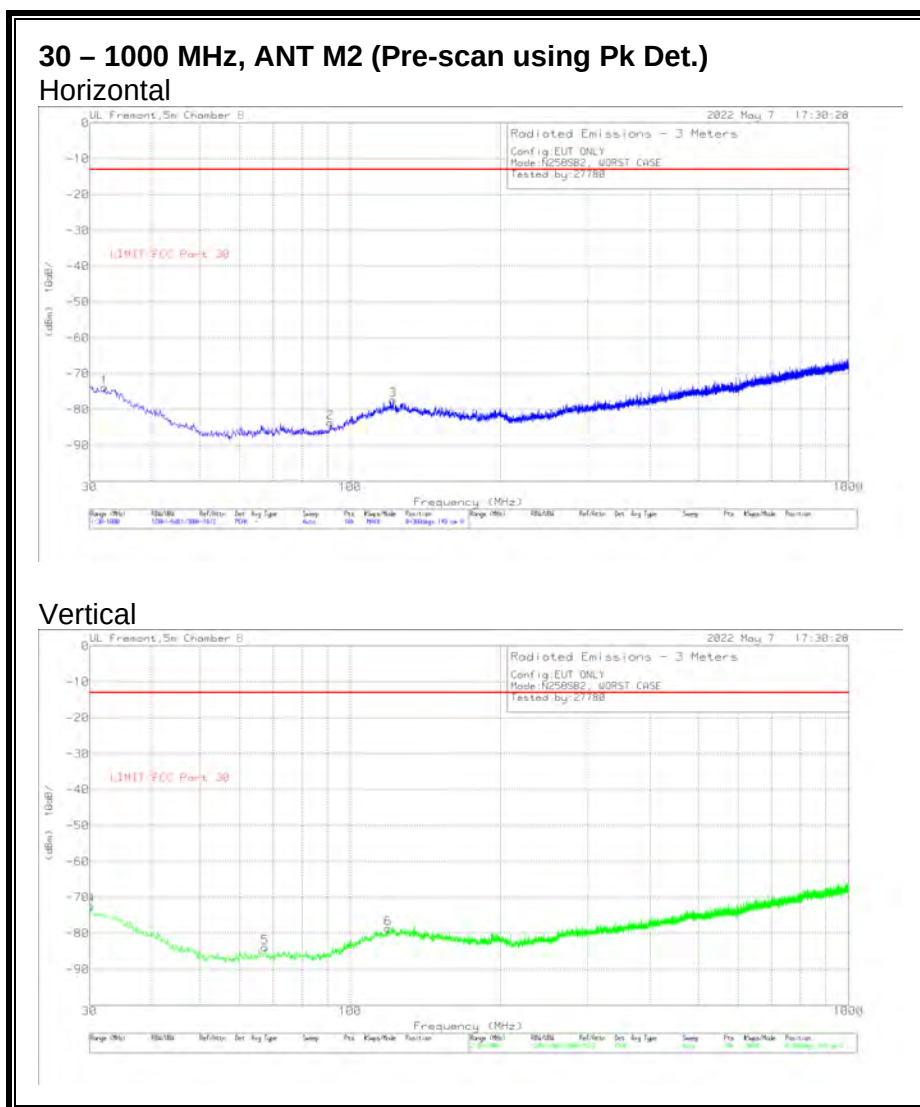


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	30.194	-79.12	Pk	26.6	-31.5	11.7	-72.32	-13	-59.32	0-360	149	V
1	32.134	-79.38	Pk	25.4	-31.5	11.7	-73.78	-13	-60.78	0-360	149	H
5	67.442	-78.16	Pk	13.7	-31.1	11.7	-83.86	-13	-70.86	0-360	149	V
2	91.304	-78.56	Pk	14.1	-30.9	11.7	-83.66	-13	-70.66	0-360	149	H
6	119.143	-79.35	Pk	19.8	-30.7	11.7	-78.55	-13	-65.55	0-360	149	V
3	121.956	-78.26	Pk	19.9	-30.7	11.7	-77.36	-13	-64.36	0-360	149	H

Pk - Peak detector

30 – 1000 MHz, ANT M3 (Pre-scan using Pk Det.)

Horizontal

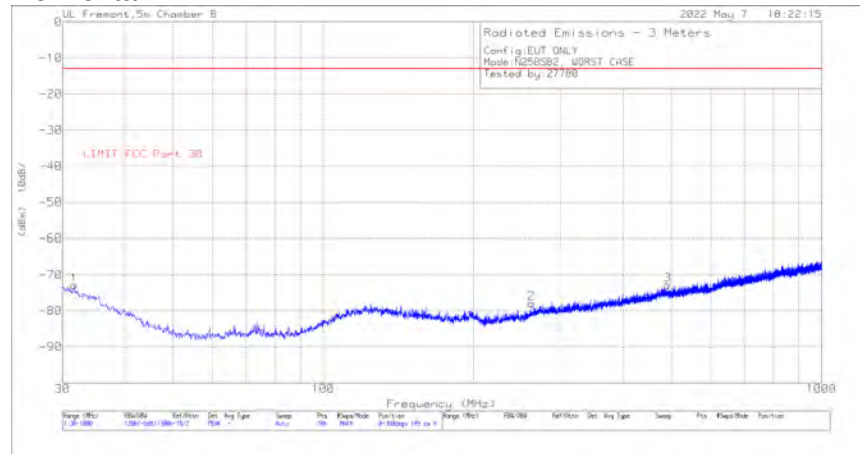

Vertical



Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC Part 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.649	-78.6	Pk	25.5	-31.5	11.7	-72.9	-13	-59.9	0-360	149	H
4	33.589	-79.22	Pk	24.3	-31.5	11.7	-74.72	-13	-61.72	0-360	149	V
2	262.024	-78.17	Pk	18.4	-29.8	11.7	-77.87	-13	-64.87	0-360	149	H
5	326.917	-78.86	Pk	20	-29.6	11.7	-76.76	-13	-63.76	0-360	149	V
3	491.235	-78.85	Pk	23.4	-29	11.7	-72.75	-13	-59.75	0-360	149	H
6	889.032	-79.63	Pk	28.3	-26.9	11.7	-66.53	-13	-53.53	0-360	149	V

Pk - Peak detector


8.4.12. RSE n258 SB2 1 - 18 GHz

1 - 18 GHz, ANT M2 (Pre-scan using Pk Det.)

Horizontal

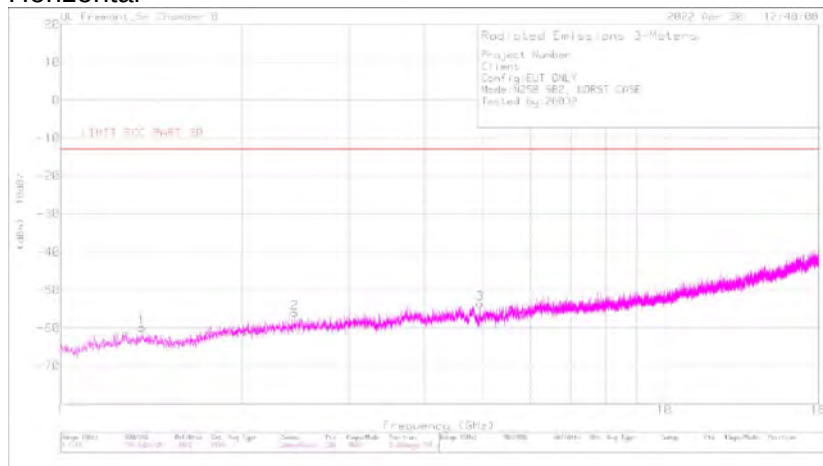

Vertical

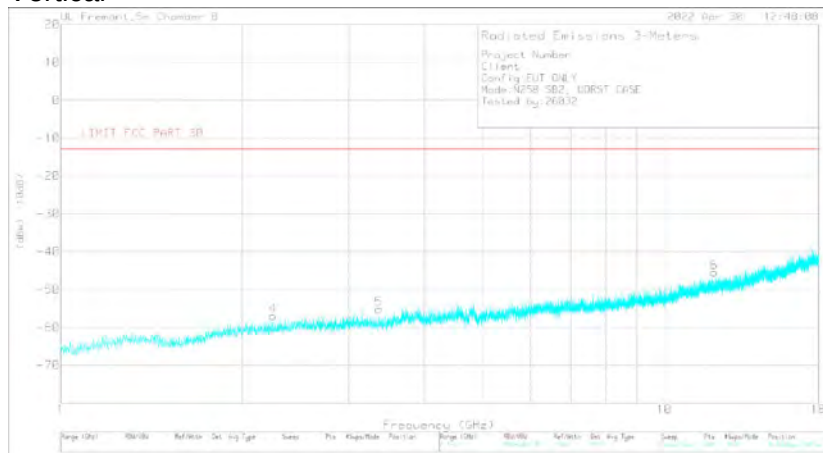


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.362118	-65.79	Pk	29.1	-34.9	11.7	-59.89	-13	-46.89	0-360	151	H
4	2.248713	-65.48	Pk	31.7	-34.9	11.7	-56.98	-13	-43.98	0-360	150	V
2	2.439973	-65.1	Pk	32.2	-34.8	11.7	-56	-13	-43	0-360	151	H
5	3.36652	-65.7	Pk	32.5	-33.7	11.7	-55.2	-13	-42.2	0-360	150	V
3	4.95015	-68.42	Pk	34.1	-30.9	11.7	-53.52	-13	-40.52	0-360	151	H
6	12.085411	-73.67	Pk	38.7	-22.2	11.7	-45.47	-13	-32.47	0-360	150	V

Pk - Peak detector

1 – 18 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

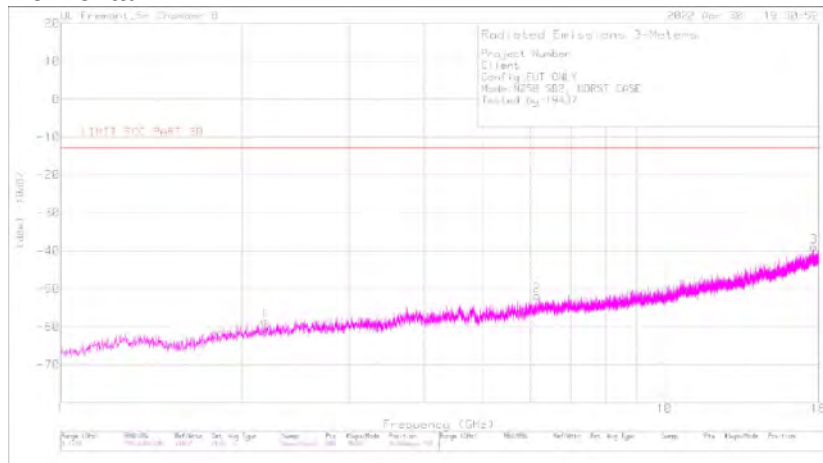

Vertical

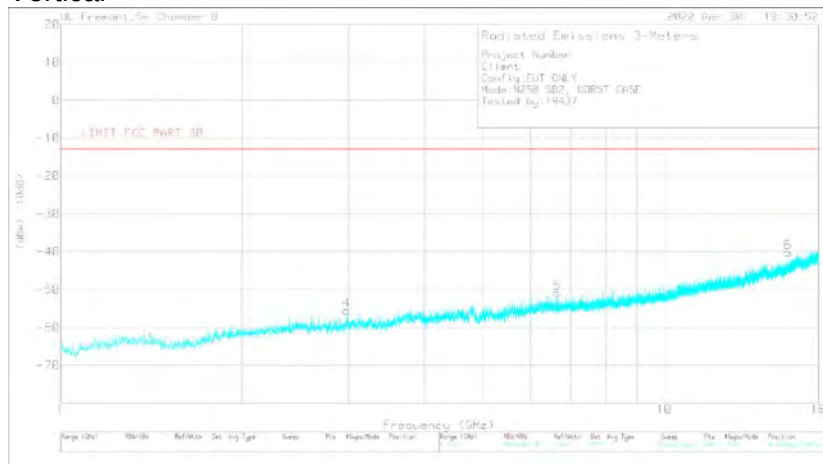


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.18156	-66.55	Pk	31.3	-34.9	11.7	-58.45	-13	-45.45	0-360	150	H
4	2.97465	-65.85	Pk	32.9	-34.3	11.7	-55.55	-13	-42.55	0-360	150	V
2	6.14871	-71.27	Pk	35.9	-28.1	11.7	-51.77	-13	-38.22	0-360	150	H
5	6.642585	-70.99	Pk	35.7	-27.3	11.7	-50.89	-13	-37.89	0-360	150	V
6	16.004109	-73.4	Pk	40.5	-19	11.7	-40.2	-13	-27.2	0-360	150	V
3	17.678694	-74.85	Pk	41.5	-17.3	11.7	-38.95	-13	-25.95	0-360	150	H


Pk - Peak detector

8.4.13. RSE n258 SB2 18 - 24 GHz

18 - 24 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

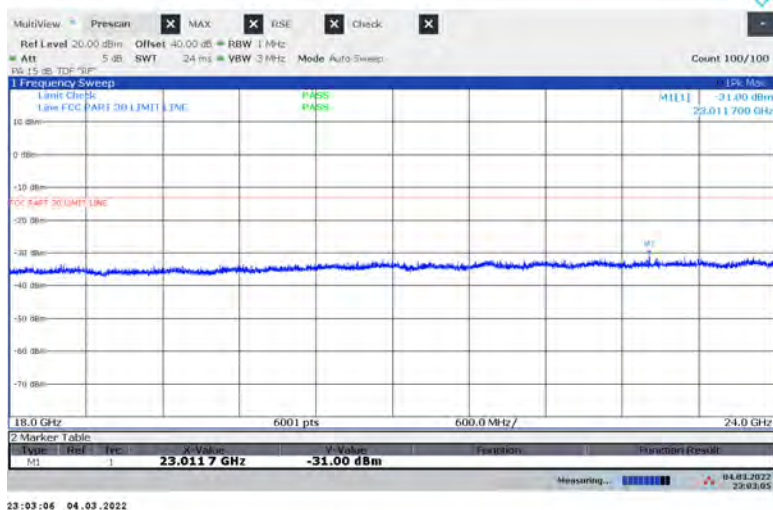

18 - 24 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

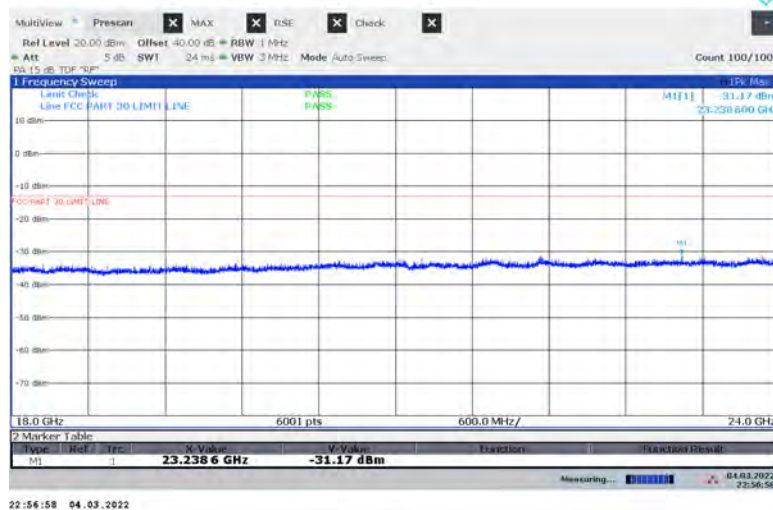

No emission detected using Peak Detection.

18 - 24 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal



18 - 24 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical




Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

18 – 24 GHz n258 SB2, 1CC


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	23.774	3.5	H	-34.70	-13	-21.70
M3	23.774	3.5	V	-37.43	-13	-24.43

8.4.14. RSE n258 SB2 24 – 24.75 GHz

24 – 24.75 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

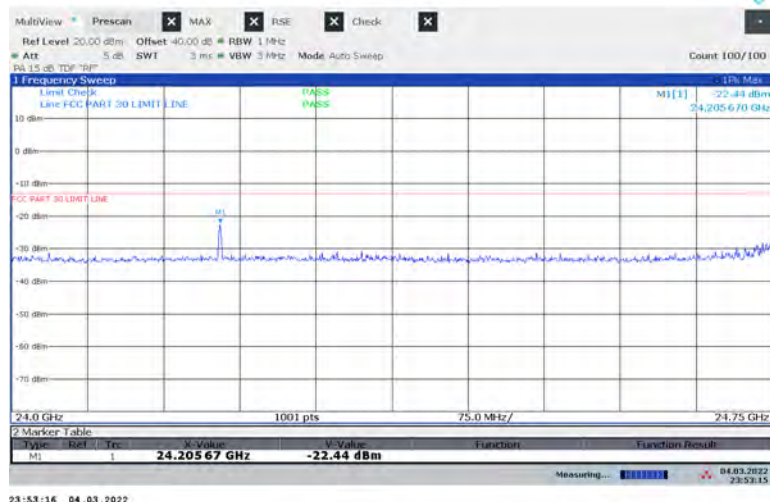


24 – 24.75 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

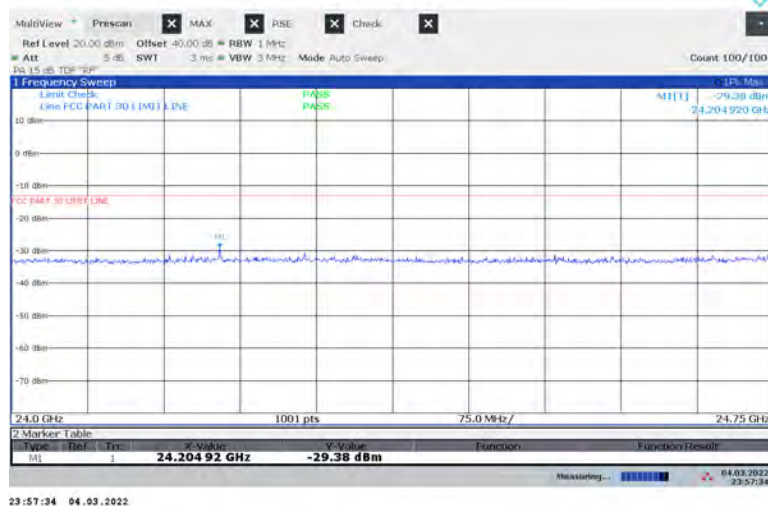


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

24 – 24.75 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

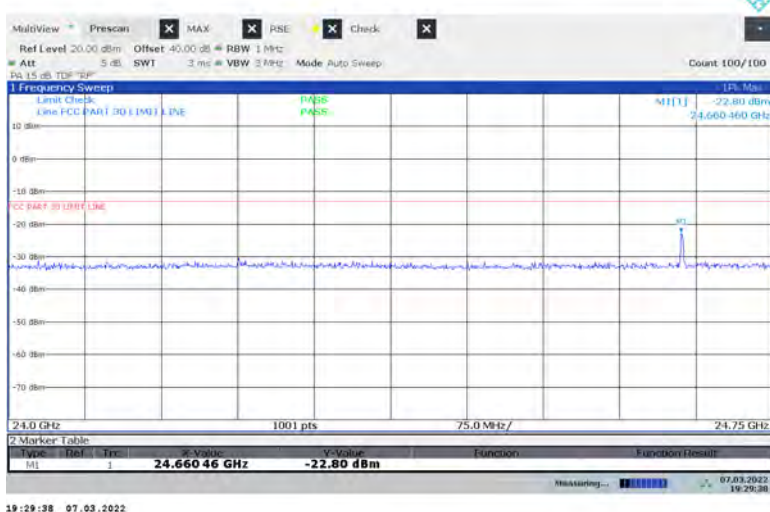

24 – 24.75 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

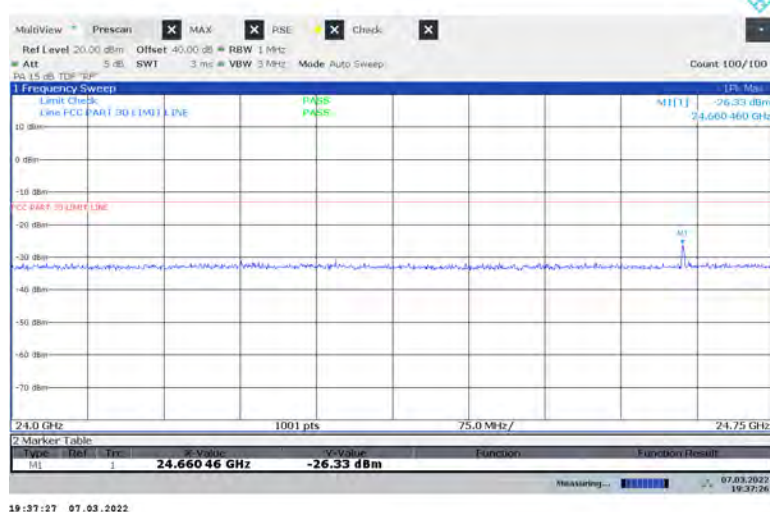


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

24 – 24.75 GHz n258 SB2, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.205	3.5	H	-30.76	-13	-17.76
M2	24.205	3.5	V	-39.03	-13	-26.03
M3	24.661	3.5	H	-26.91	-13	-13.91
M3	24.661	3.5	V	-30.12	-13	-17.12

24 – 24.75 GHz n258 SB2, 2CC

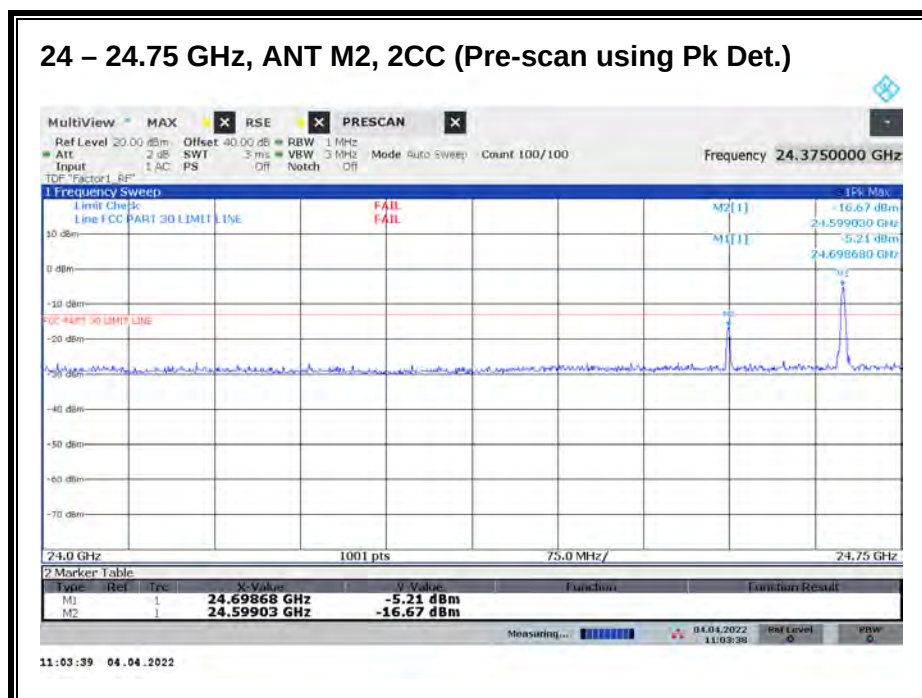


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.699	3.5	--	-17.39	-13	-4.39

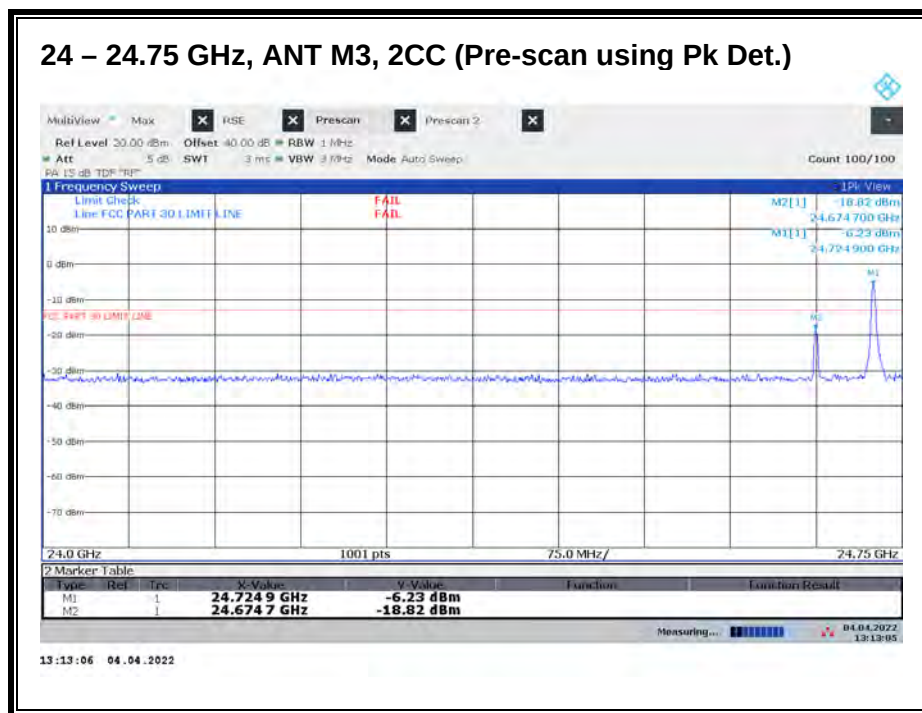

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.725	3.5	--	-16.37	-13	-3.37

24 – 24.75 GHz n258 SB2, 3CC

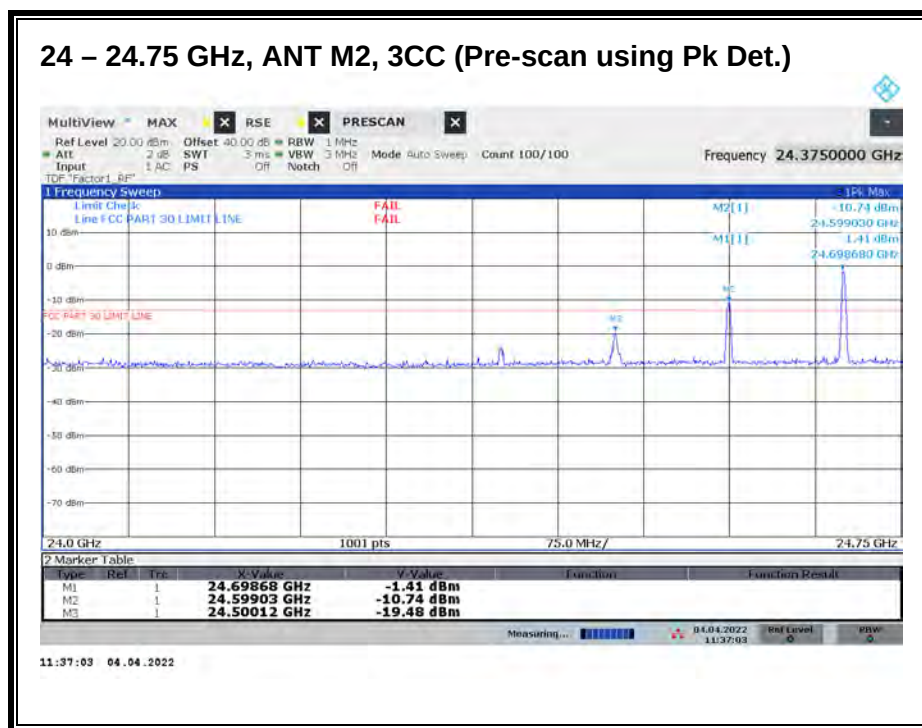


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.699	3.5	--	-13.77	-13	-0.77

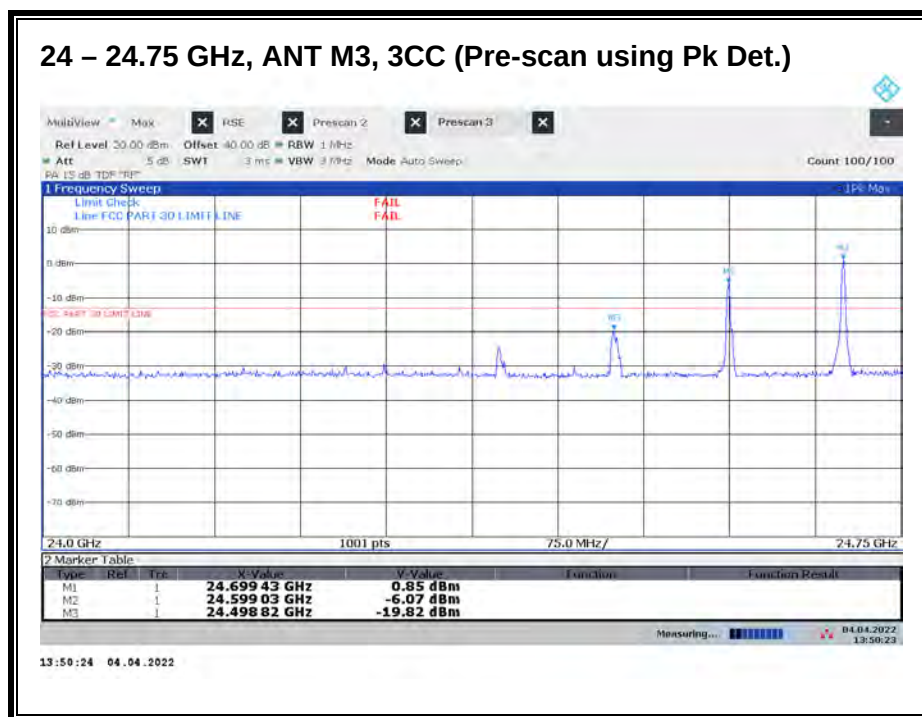

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.699	3.5	--	-13.09	-13	-0.09

24 – 24.75 GHz n258 SB2, 4CC

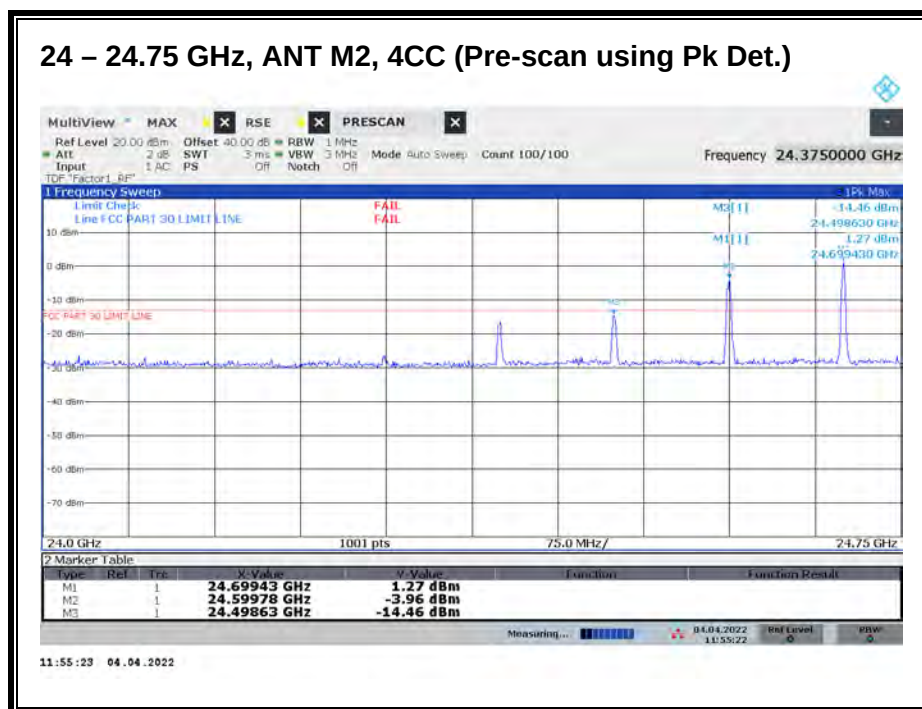


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	24.699	3.5	--	-13.95	-13	-0.95

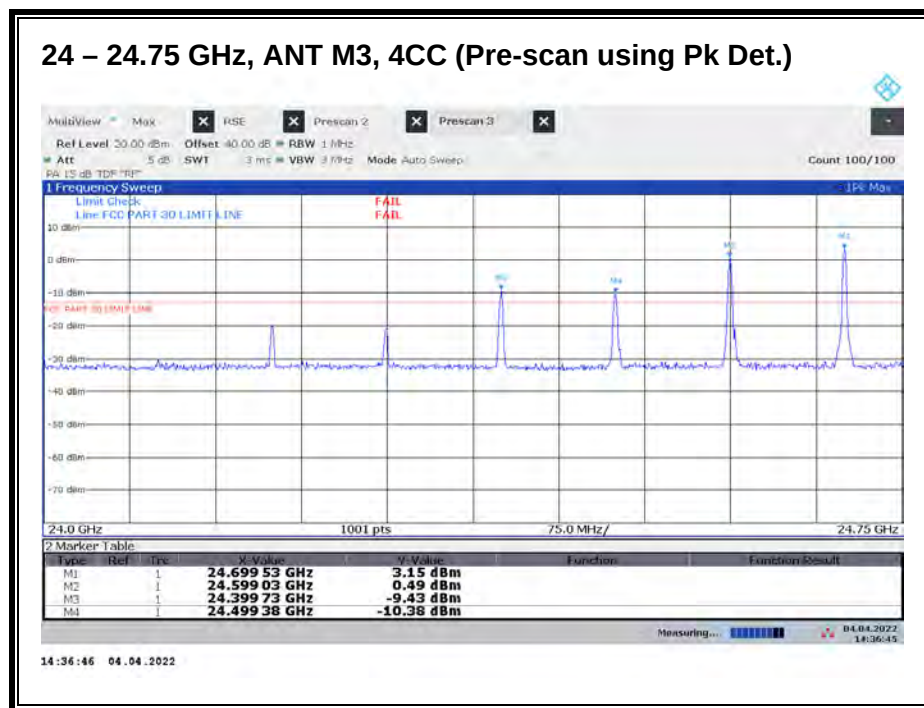

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.


All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	24.699	3.5	--	-19.77	-13	-6.77


8.4.15. RSE n258 SB2 25.25 - 26.5 GHz

Note: 24.75 – 25.25 GHz covered by Fundamental and BE measurements.

25.25 - 26.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

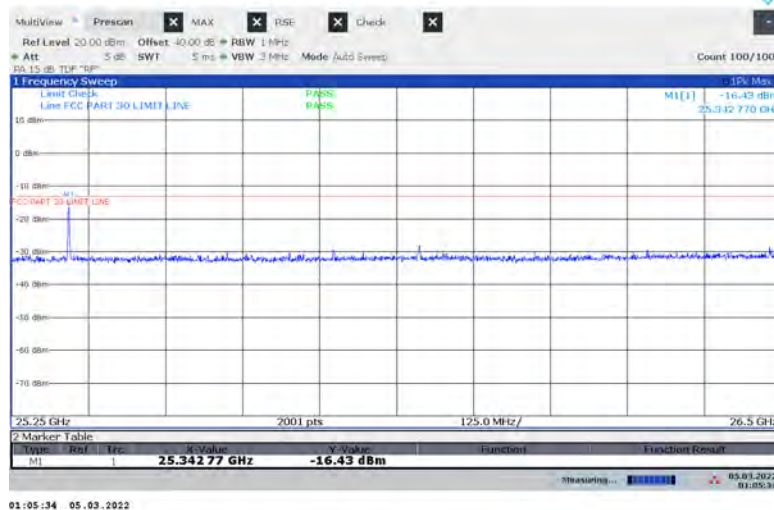


25.25 - 26.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

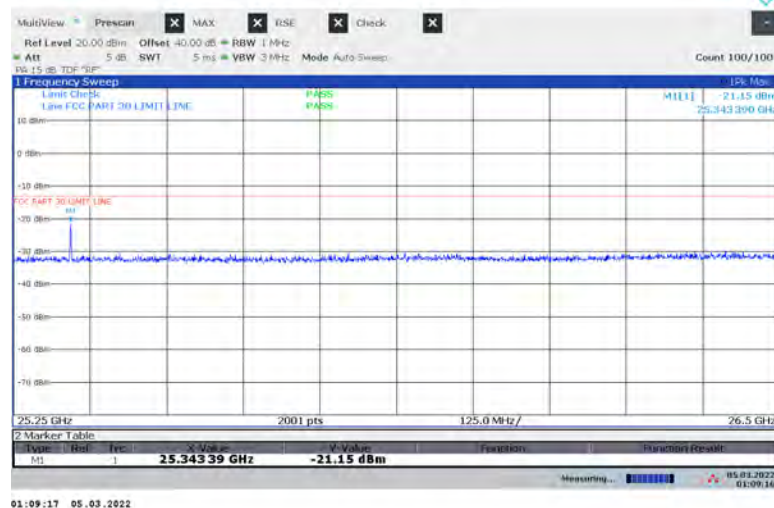


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

25.25 - 26.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

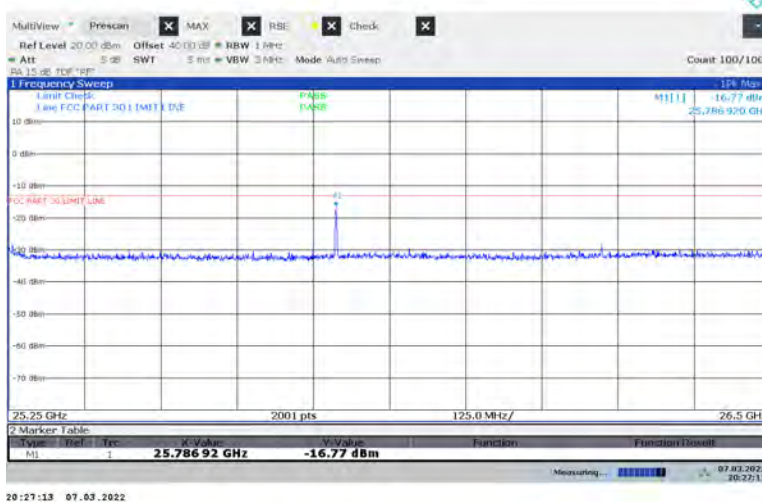

25.25 - 26.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

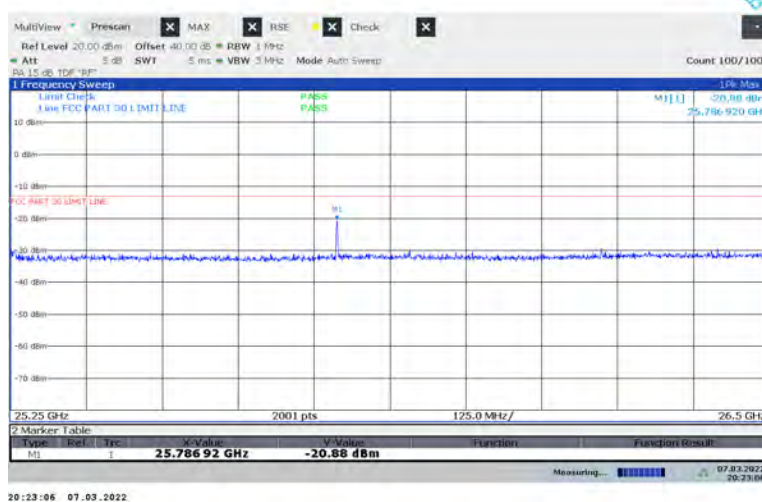


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

25.25 - 26.5 GHz n258 SB2, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	25.343	3.5	H	-29.18	-13	-16.18
M2	25.343	3.5	V	-31.40	-13	-18.40
M3	25.787	3.5	H	-29.21	-13	-16.21
M3	25.787	3.5	V	-27.04	-13	-14.04

25.25 - 26.5 GHz n258 SB2, 2CC

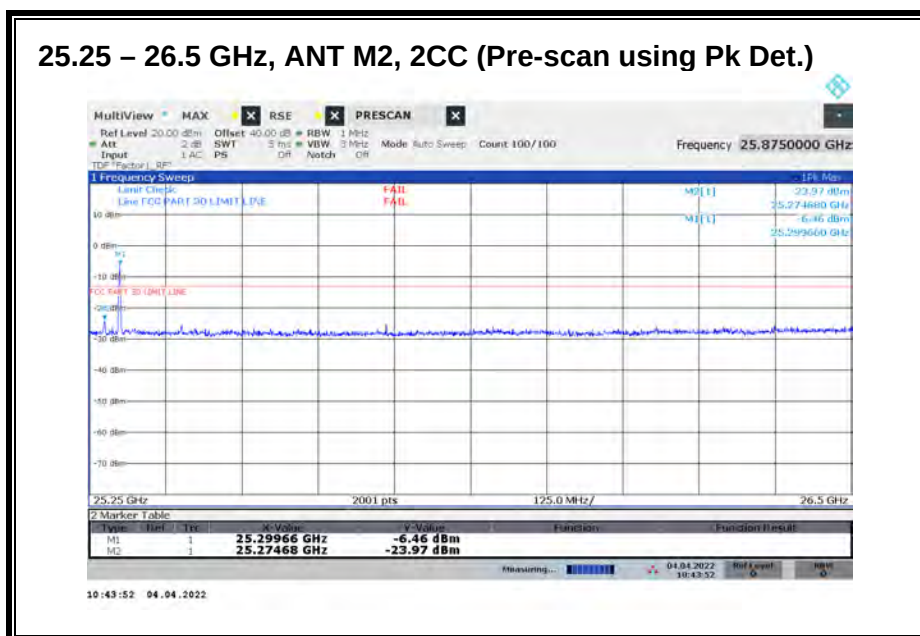


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	25.299	3.5	--	-17.95	-13	-4.95

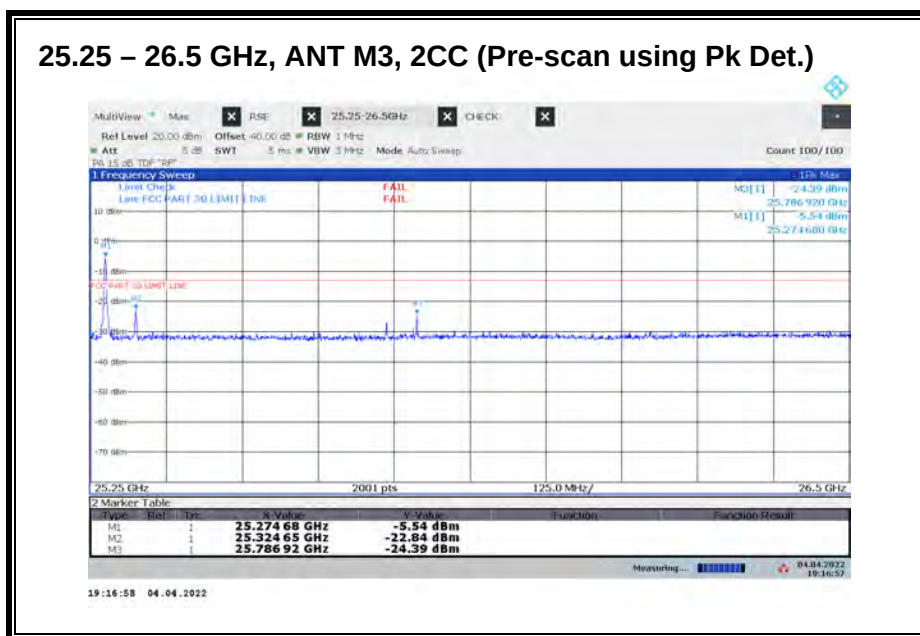

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	25.274	3.5	--	-22.74	-13	-9.74

25.25 - 26.25 GHz n258 SB2, 3CC

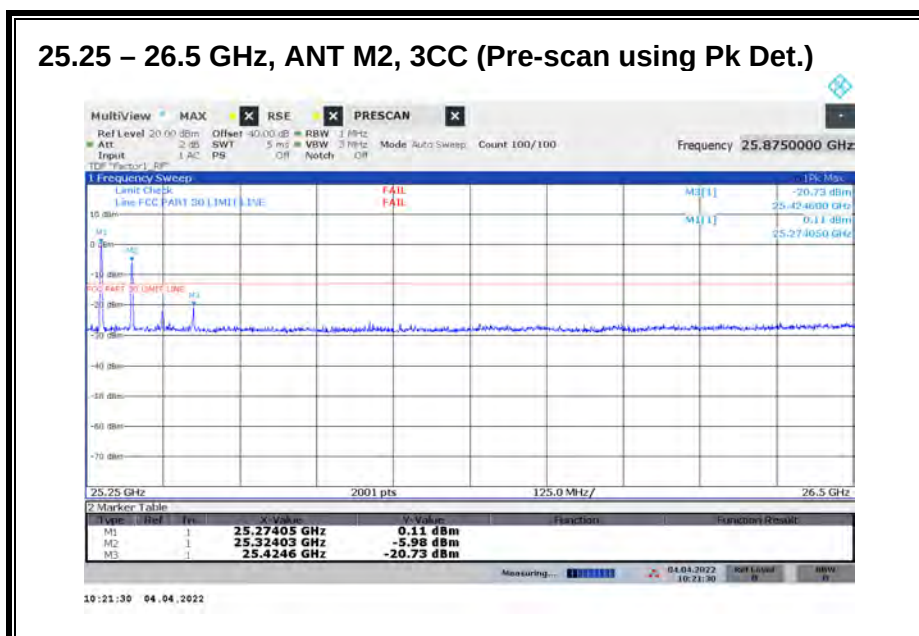

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	25.274	3.5	--	-17.12	-13	-4.12

25.25 – 26.5 GHz, ANT M3, 3CC (Pre-scan using Pk Det.)

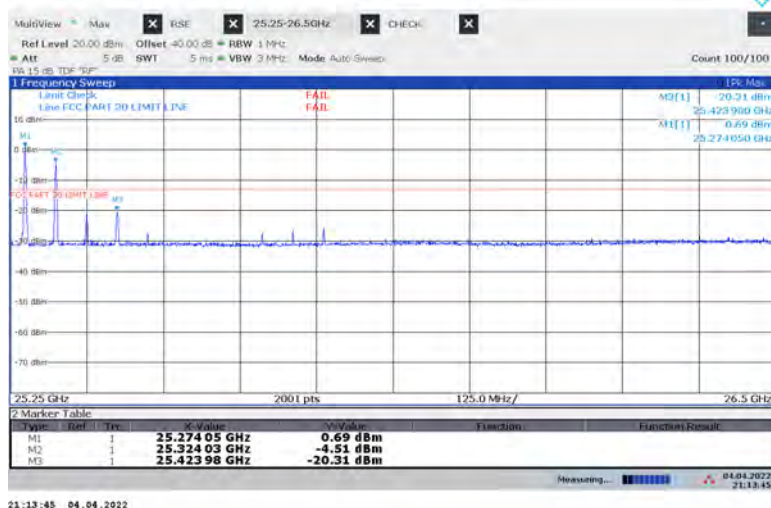

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	25.274	3.5	--	-21.27	-13	-8.27

25.25 - 26.25 GHz n258 SB2, 4CC

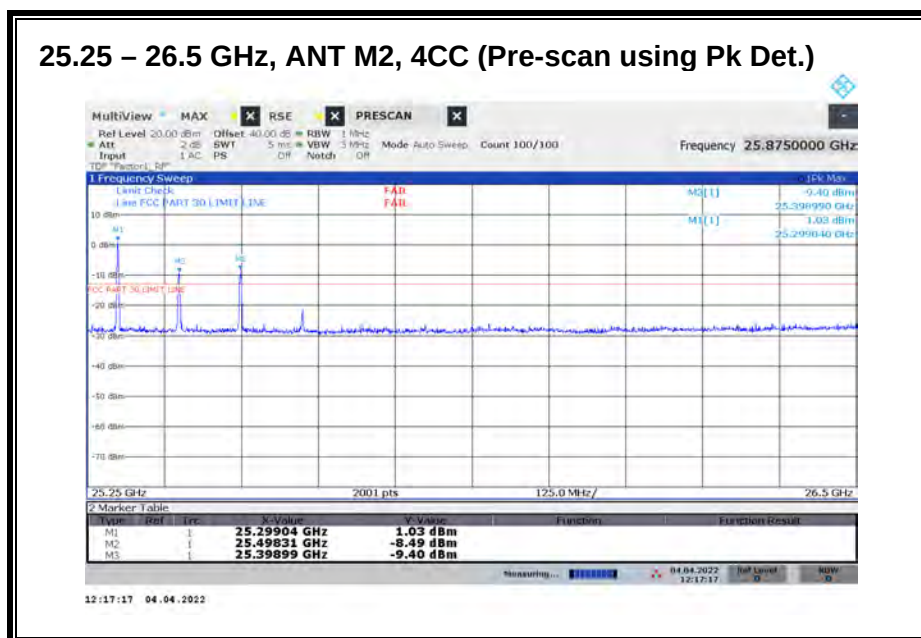


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	25.299	3.5	--	-15.63	-13	-2.63

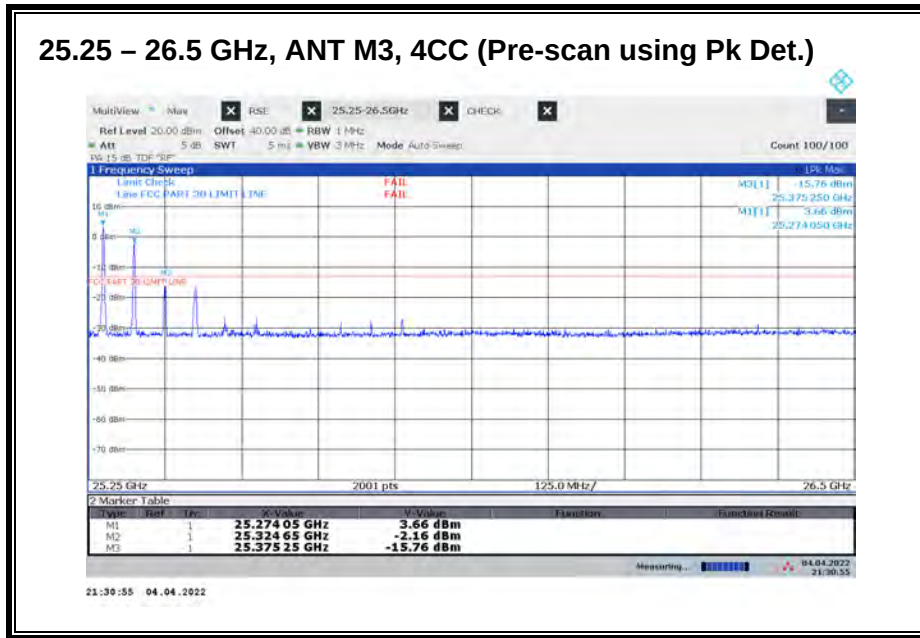

Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	25.274	3.5	--	-20.89	-13	-7.89

8.4.16. RSE n258 SB2 26.5 - 40 GHz

26.5 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

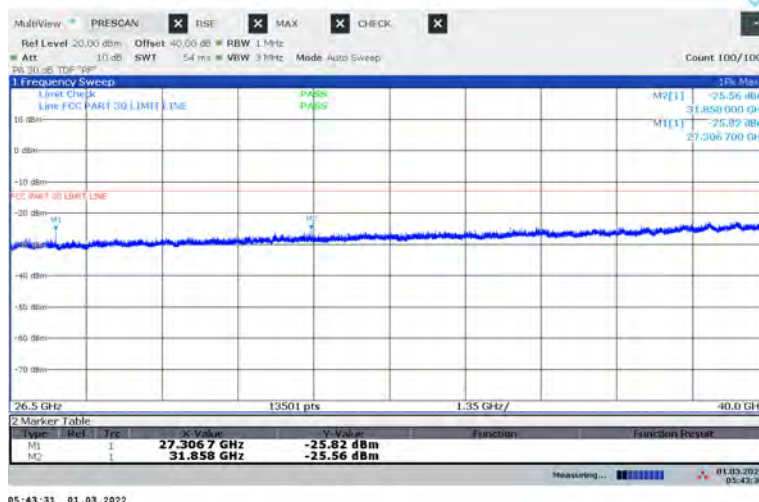


26.5 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

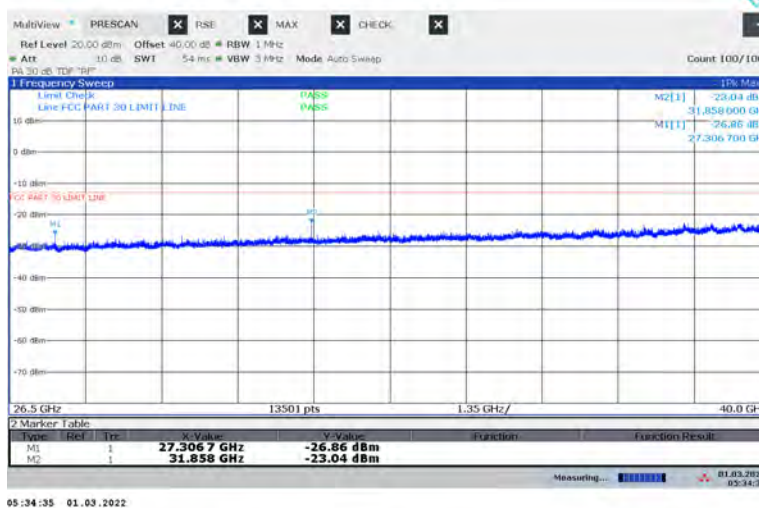


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 - 40 GHz, ANT M3 (Pre-scan using Pk Det.)
Horizontal

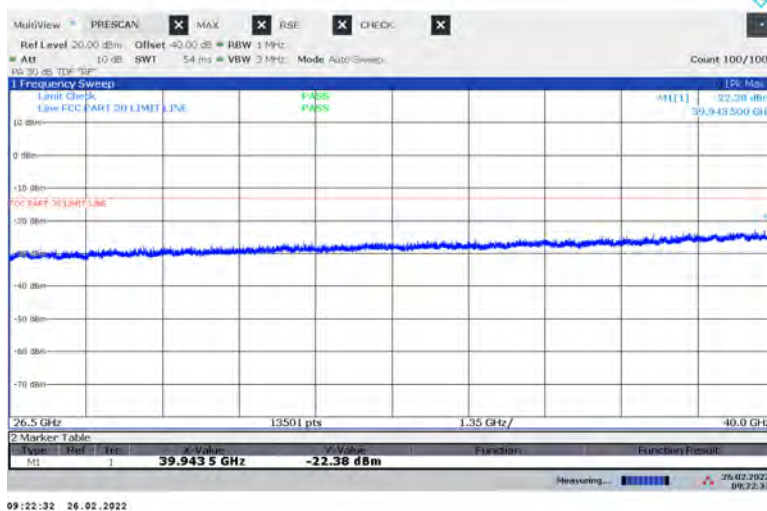

26.5 - 40 GHz, ANT M3 (Pre-scan using Pk Det.)
Vertical

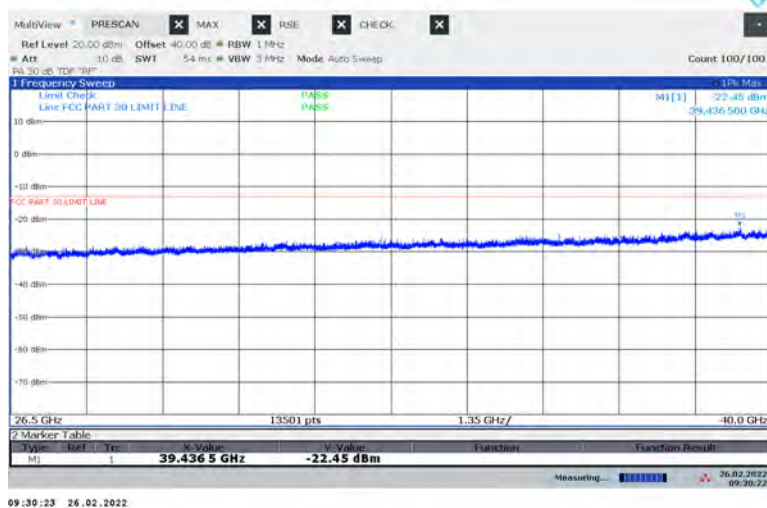


No emission detected using Peak Detection.


26.5 - 40 GHz n258 SB2, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	27.307	3	H	-28.85	-13	-15.85
M2	27.307	3	V	-33.33	-13	-20.33
M2	31.858	3	H	-31.33	-13	-18.33
M2	31.858	3	V	-24.33	-13	-11.33

40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

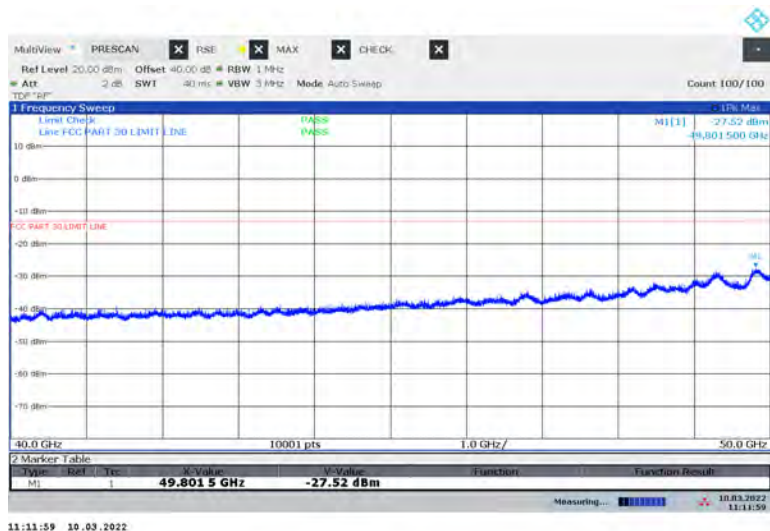

40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical


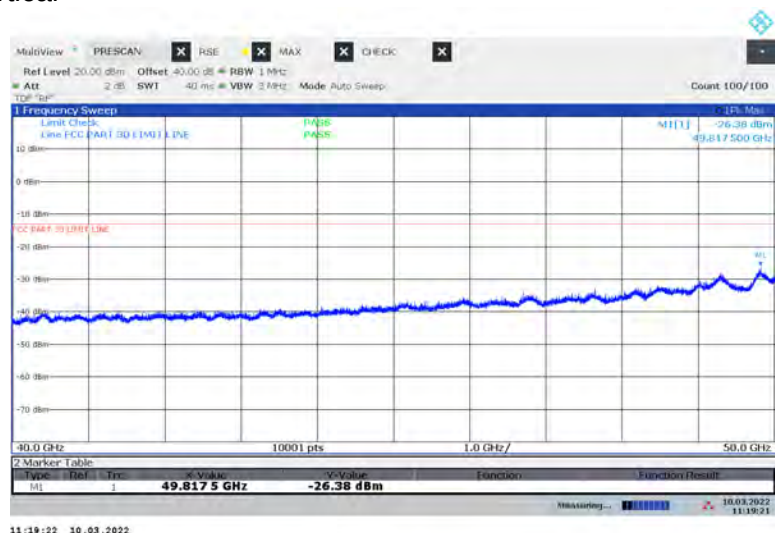


No emission detected using Peak Detection.



40 – 50 GHz n258 SB2, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	49.548	3	H	-24.53	-13	-11.53
M2	49.548	3	V	-35.94	-13	-22.94

8.4.18. RSE n258 SB2 50 - 75 GHz

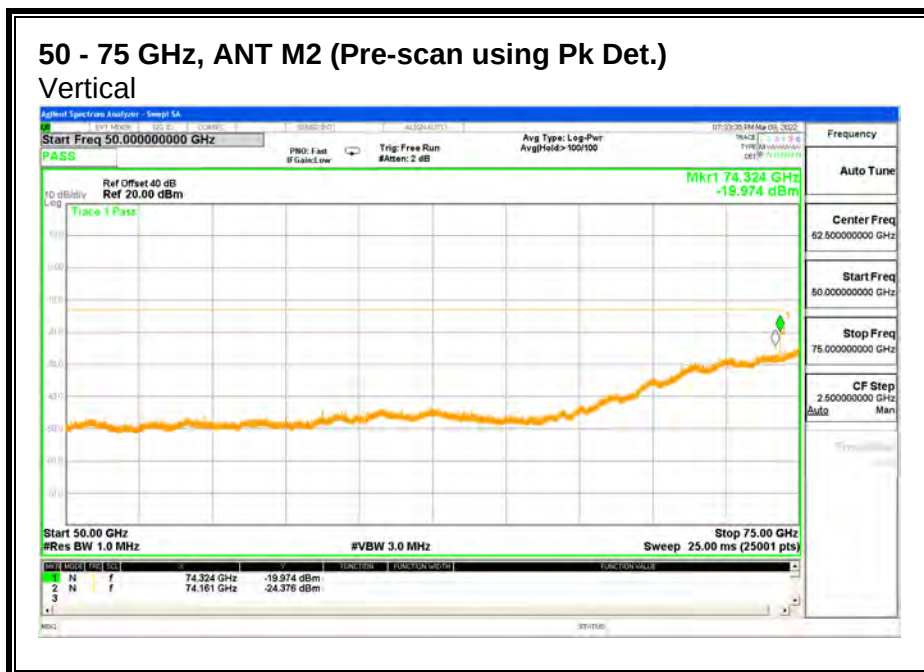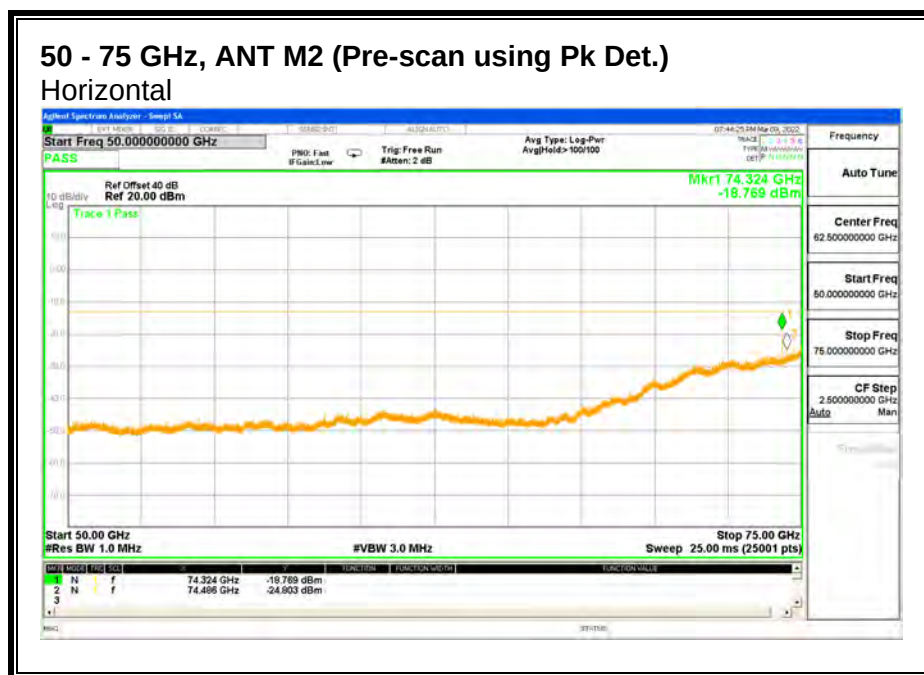

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

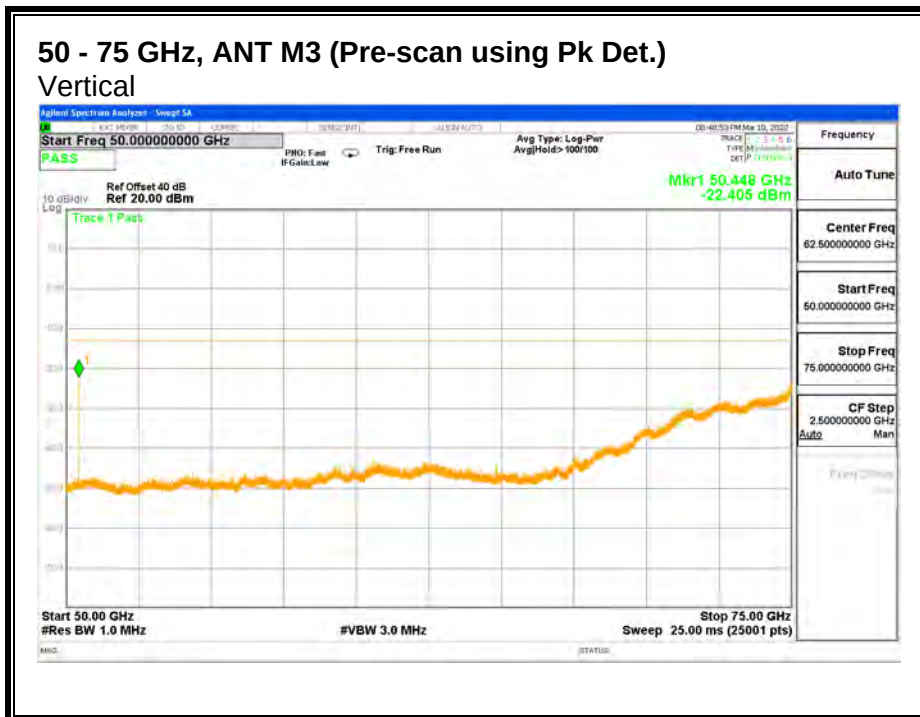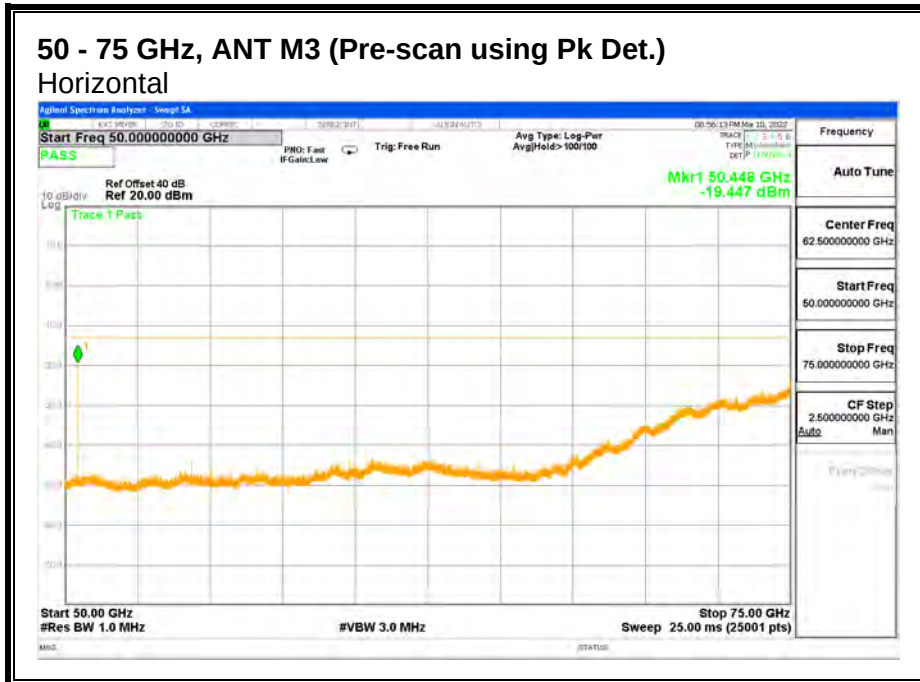


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

50 - 75 GHz n258 SB2


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	74.322	1.5	H	-19.45	-13	-6.45
M2	74.322	1.5	V	-27.68	-13	-14.68
M3	50.448	1.5	H	-23.17	-13	-10.17
M3	50.448	1.5	V	-30.79	-13	-17.79

8.4.19. RSE n258 SB2 75 - 100 GHz



75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

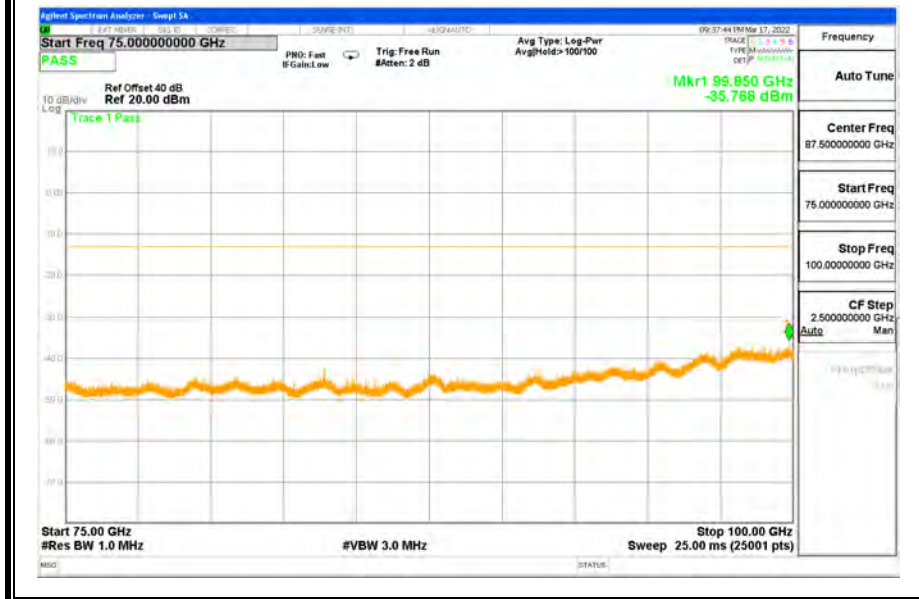

75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

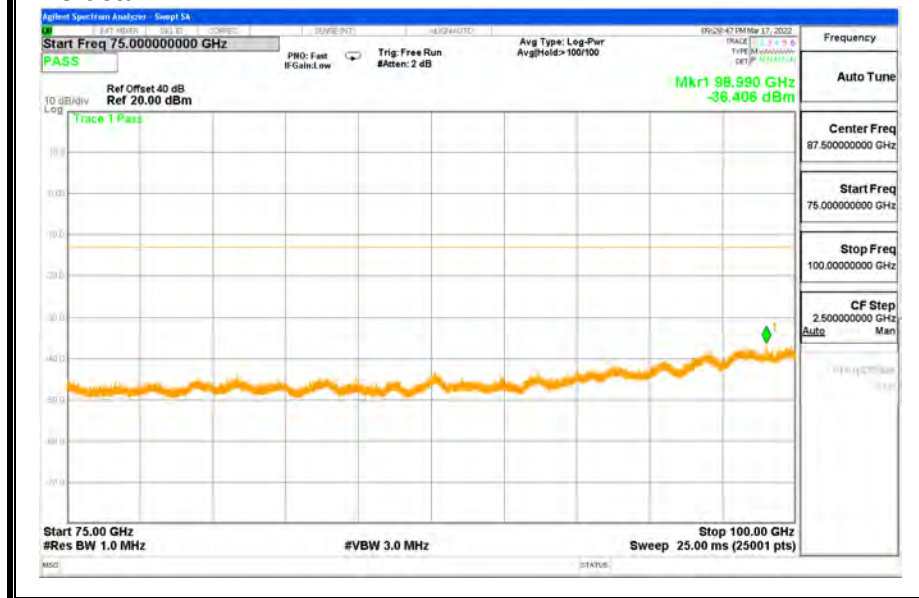

No emission detected using Peak Detection.

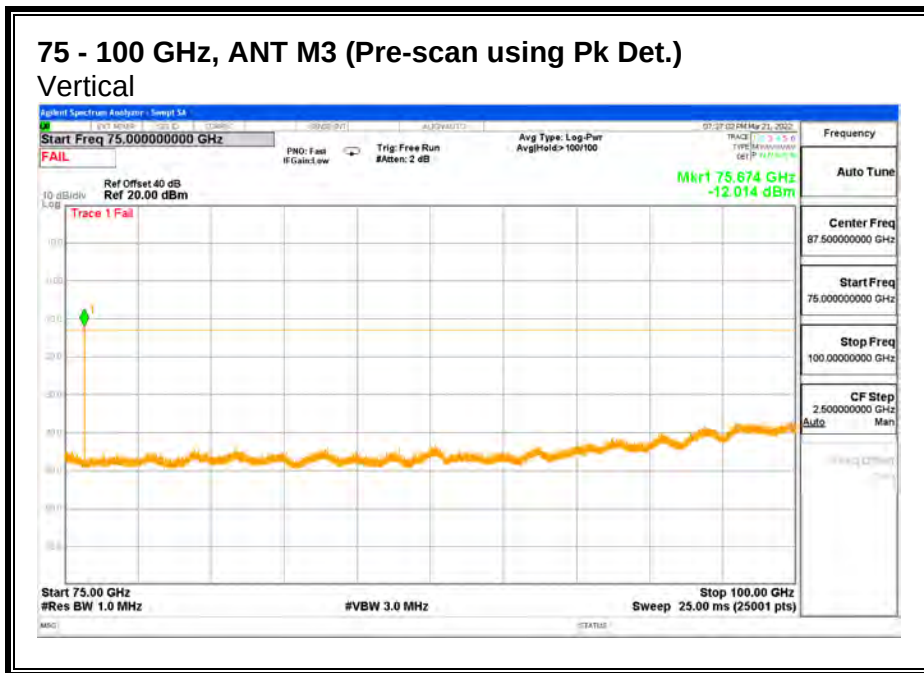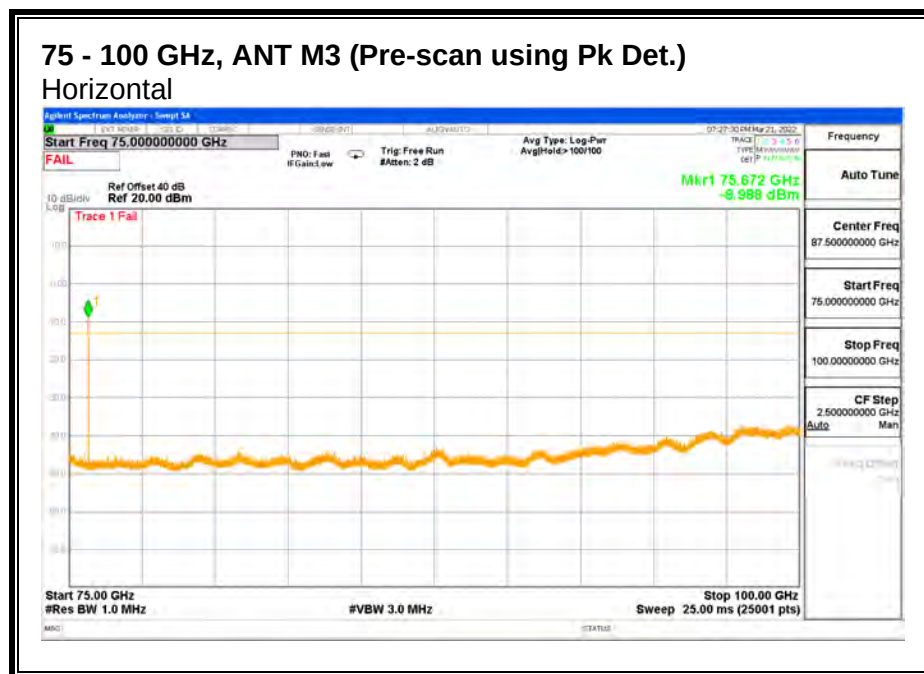


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured

75 - 100 GHz n258 SB2


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	75.673	1	H	-13.74	-13	-0.74
M3	75.673	1	V	-19.40	-13	-6.40

8.4.20. RSE n261 30 – 1000 MHz

30 – 1000 MHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

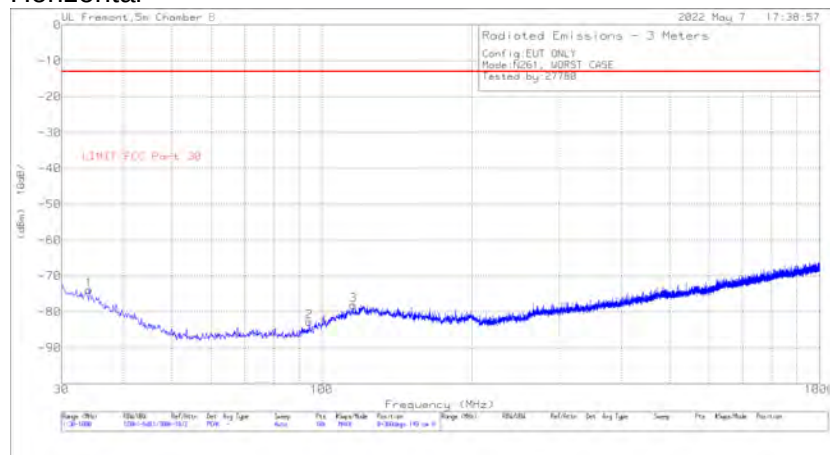

Vertical

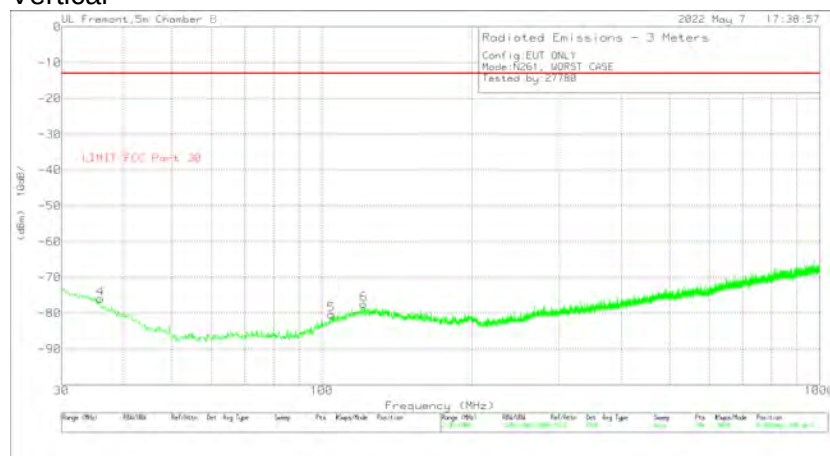


Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	34.074	-77.98	Pk	24	-31.5	11.7	-73.78	-13	-60.78	0-360	149	H
4	35.917	-78.2	Pk	22.1	-31.5	11.7	-75.9	-13	-62.9	0-360	148	V
2	94.311	-78.28	Pk	14.7	-30.8	11.7	-82.68	-13	-69.68	0-360	149	H
5	104.496	-78.61	Pk	17.4	-30.8	11.7	-80.31	-13	-67.31	0-360	148	V
3	115.651	-78.62	Pk	19.5	-30.7	11.7	-78.12	-13	-65.12	0-360	149	H
6	121.471	-78.41	Pk	19.9	-30.7	11.7	-77.51	-13	-64.51	0-360	148	V

Pk - Peak detector

30 – 1000 MHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

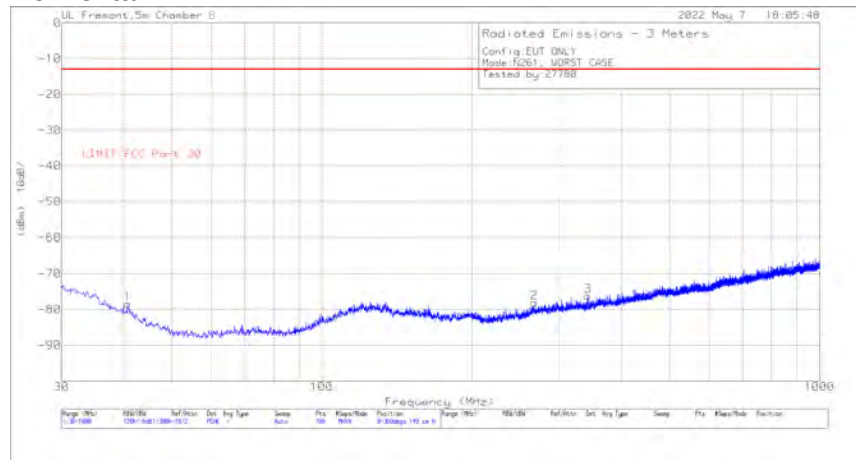

Vertical

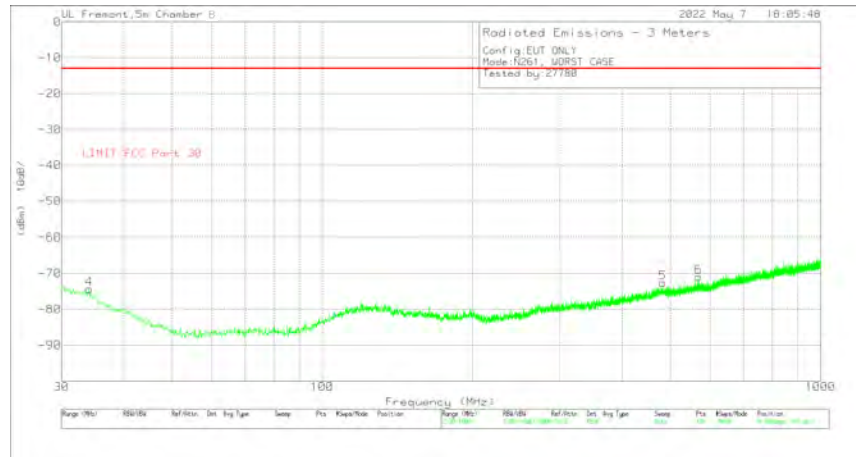

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	34.074	-78.46	Pk	24	-31.5	11.7	-74.26	-13	-61.26	0-360	149	V
1	40.767	-77.64	Pk	18.9	-31.4	11.7	-78.44	-13	-65.44	0-360	149	H
2	267.456	-78.84	Pk	18.9	-29.8	11.7	-78.04	-13	-65.04	0-360	149	H
3	341.855	-78.53	Pk	20	-29.4	11.7	-76.23	-13	-63.23	0-360	149	H
5	481.826	-78.54	Pk	23.4	-29.1	11.7	-72.54	-13	-59.54	0-360	149	V
6	567.962	-78.08	Pk	24.3	-28.9	11.7	-70.98	-13	-57.98	0-360	149	V

Pk - Peak detector

8.4.21. RSE n261 1 - 18 GHz

1 - 18 GHz, ANT M2 (Pre-scan using Pk Det.)

Horizontal



Vertical



Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	1.273714	-66.58	Pk	29.3	-34.7	11.7	-60.28	-13	-47.28	0-360	150	H
2	3.043503	-66.24	Pk	33	-34.3	11.7	-55.84	-13	-42.84	0-360	150	H
4	3.301916	-65.73	Pk	32.6	-33.9	11.7	-55.33	-13	-42.55	0-360	150	V
5	4.821793	-67.7	Pk	34.1	-30.3	11.7	-52.2	-13	-39.2	0-360	150	V
3	7.765492	-70.59	Pk	35.8	-26.9	11.7	-49.99	-13	-36.99	0-360	150	H
6	11.465729	-73.68	Pk	38.2	-22.4	11.7	-46.18	-13	-33.18	0-360	150	V

Pk - Peak detector

1 – 18 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal



Vertical

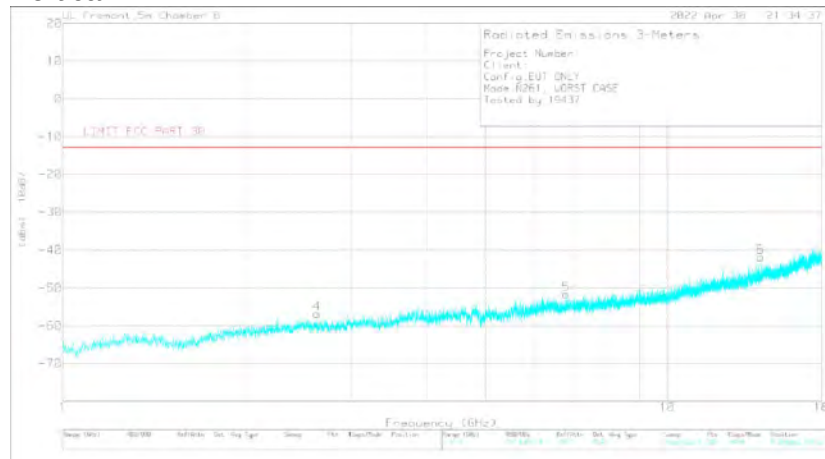


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.634633	-66.21	Pk	32.3	-34.6	11.7	-56.81	-13	-43.81	0-360	150	V
1	5.14566	-68.63	Pk	34.2	-30.5	11.7	-53.23	-13	-40.23	0-360	150	H
2	6.352721	-70.74	Pk	35.8	-27.8	11.7	-51.04	-13	-38.04	0-360	150	H
5	6.806644	-71.89	Pk	35.7	-27.2	11.7	-51.69	-13	-38.69	0-360	150	V
6	14.272571	-72.6	Pk	39	-19.9	11.7	-41.8	-13	-28.8	0-360	150	V
3	17.951558	-74.68	Pk	41.4	-16.7	11.7	-38.28	-13	-25.28	0-360	150	H


Pk - Peak detector

8.4.22. RSE n261 18 - 26.5 GHz

18 - 26.5 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

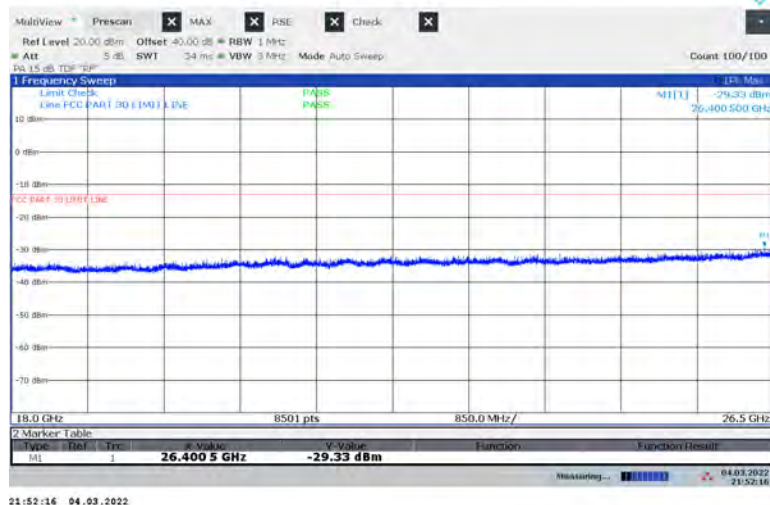


18 - 26.5 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

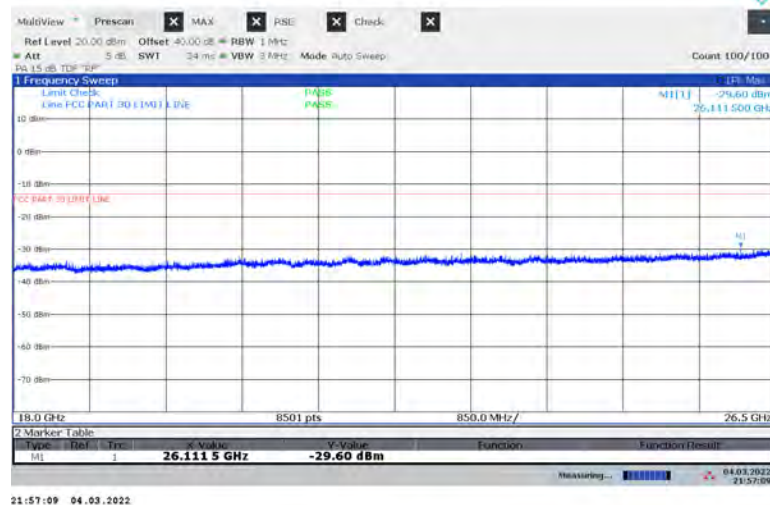


No emission detected using Peak Detection.

18 - 26.5 GHz, ANT M3 (Pre-scan using Pk Det.)
Horizontal

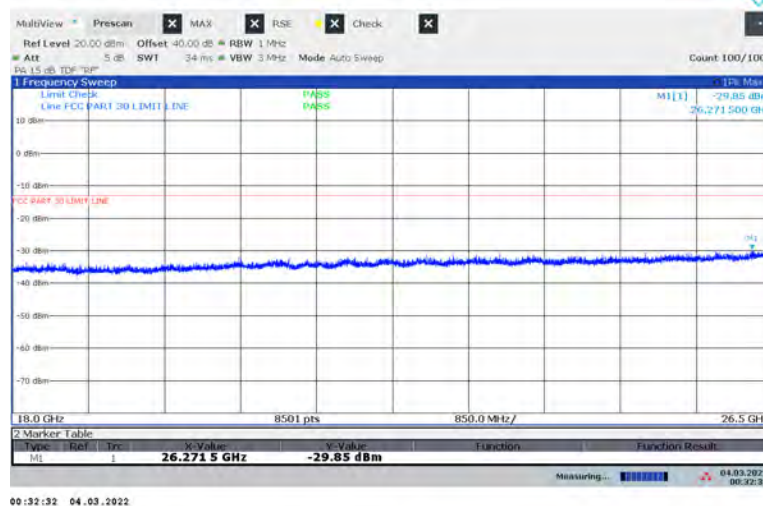


18 - 26.5 GHz, ANT M3 (Pre-scan using Pk Det.)
Vertical

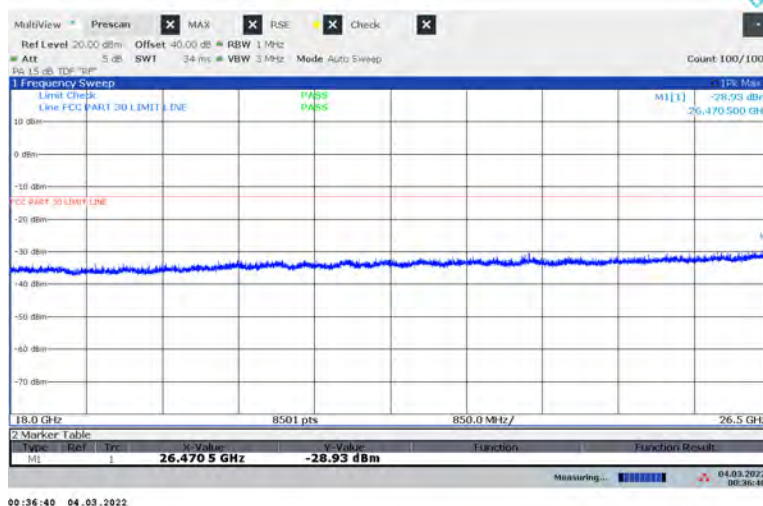

No emission detected using Peak Detection.

8.4.23. RSE n261 26.5 - 27.5 GHz

26.5 - 27.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

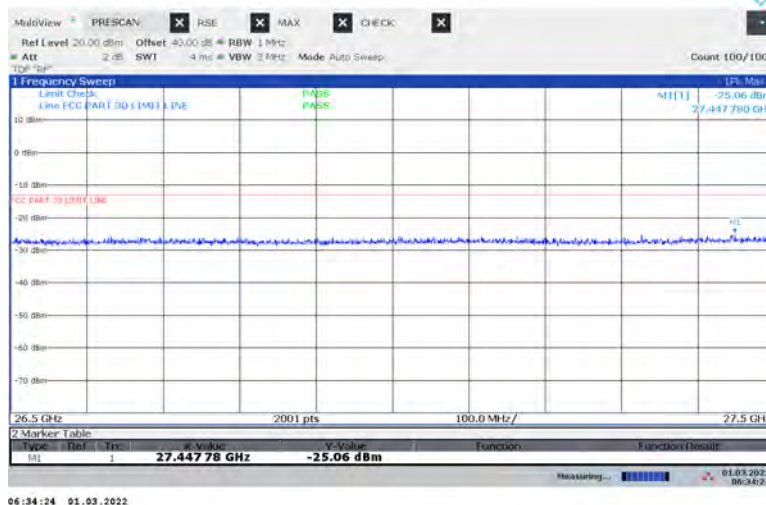

26.5 - 27.5 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical




No emission detected using Peak Detection.

26.5 - 27.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal



26.5 - 27.5 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

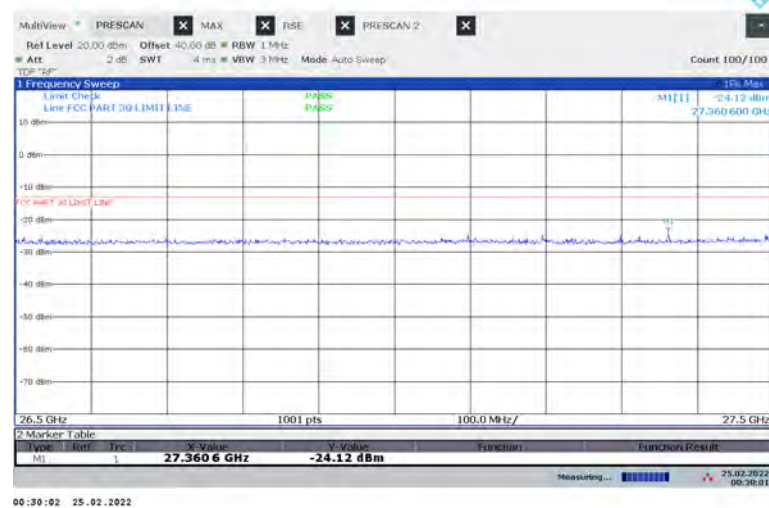


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 - 27.5 GHz n261, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	37.361	3	H	-26.74	-13	-13.74
M3	37.361	3	V	-32.42	-13	-19.42

26.5 – 27.5 GHz n261, 2CC

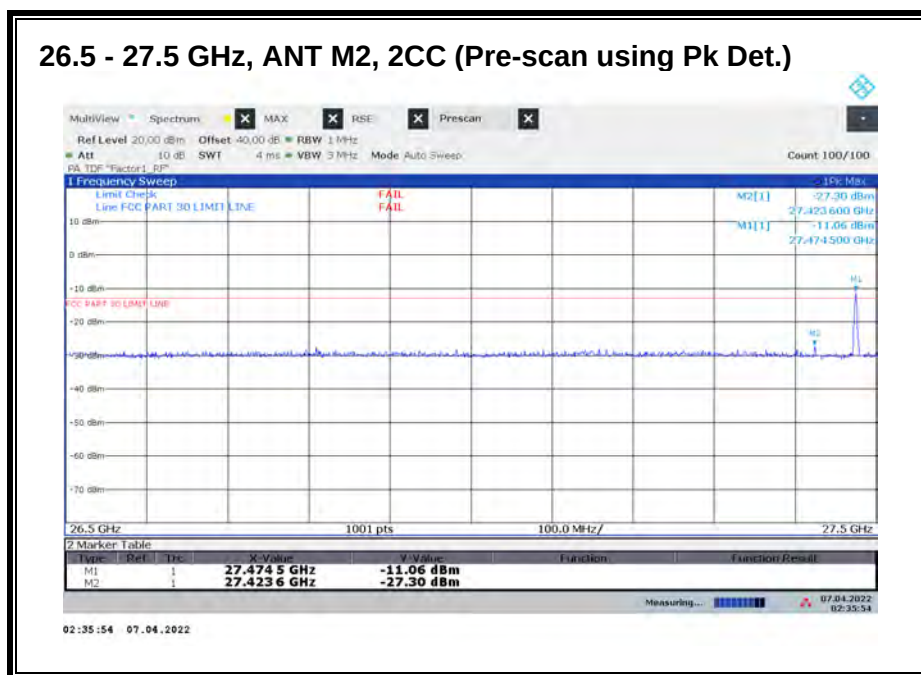


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	27.474	3	--	-19.79	-13	-6.79

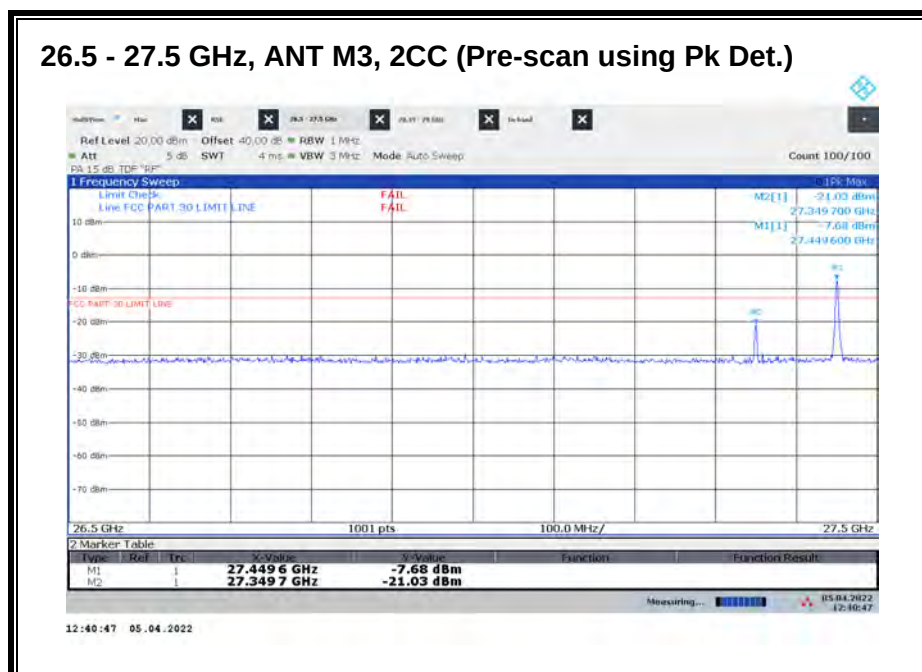

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	27.450	3	--	-16.16	-13	-3.16

26.5 – 27.5 GHz n261, 3CC

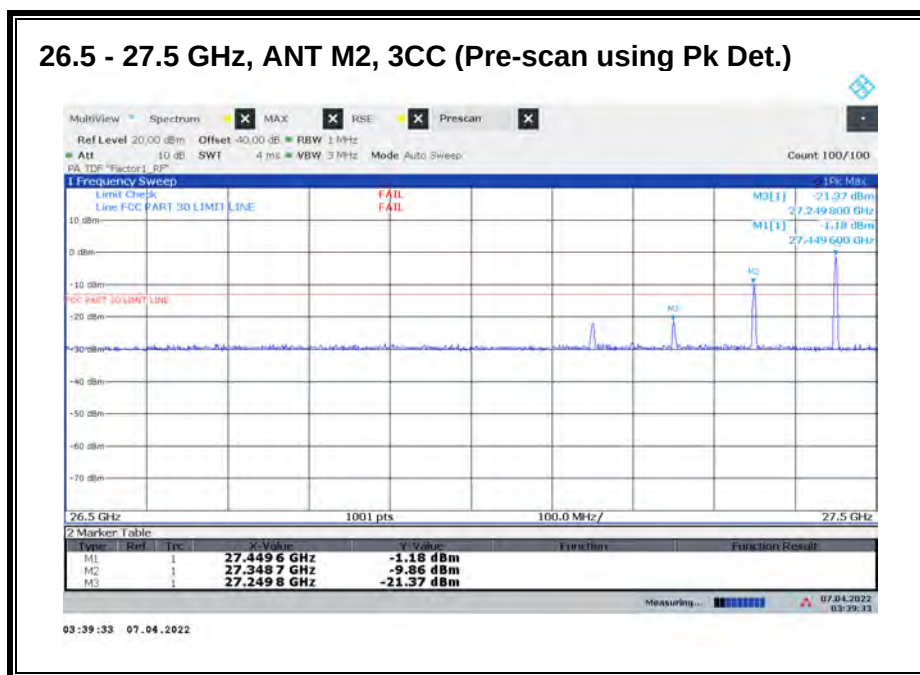


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	27.449	3	--	-18.57	-13	-5.57

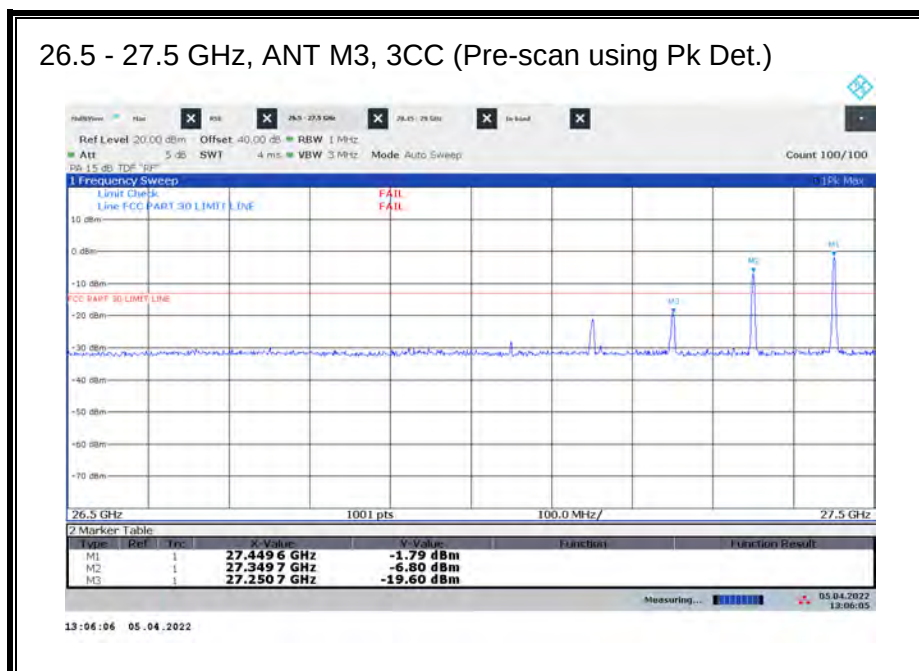

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	27.449	3	--	-16.11	-13	-3.11

26.5 – 27.5 GHz n261, 4CC

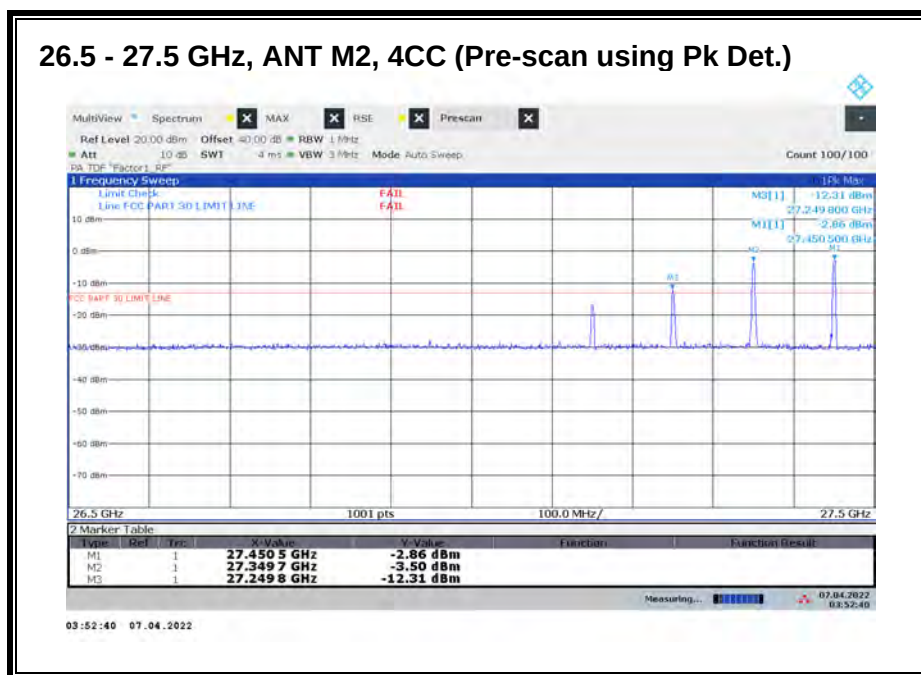


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz+ 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	27.449	3	--	-17.02	-13	-4.02

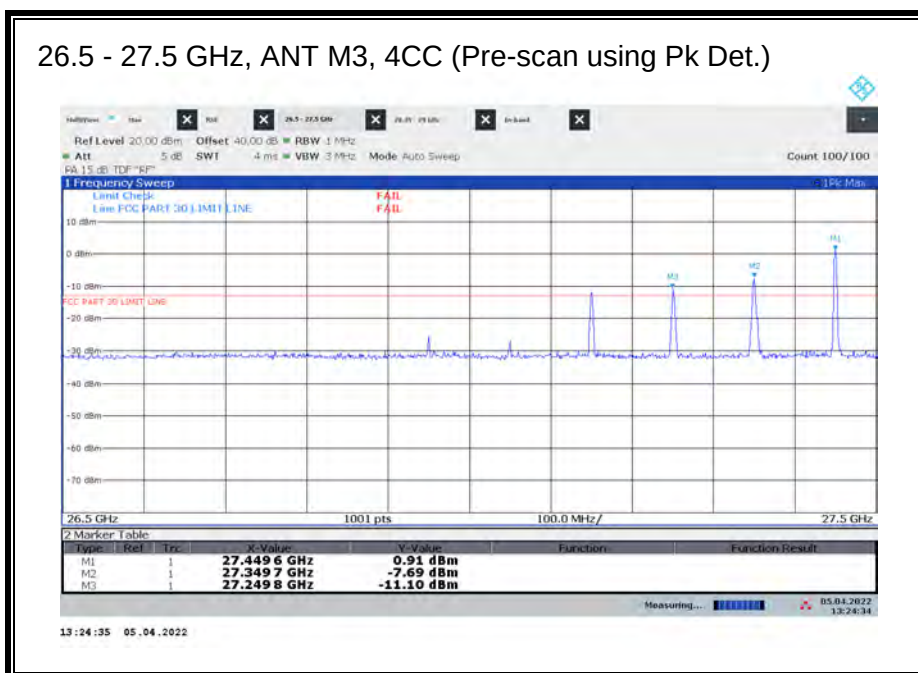

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz+ 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.


All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	27.449	3	--	-15.94	-13	-2.94


8.4.24. RSE n261 28.35 - 29 GHz

Note: 27.5 - 28.35 GHz covered by Fundamental and BE measurements.

28.35 - 29 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

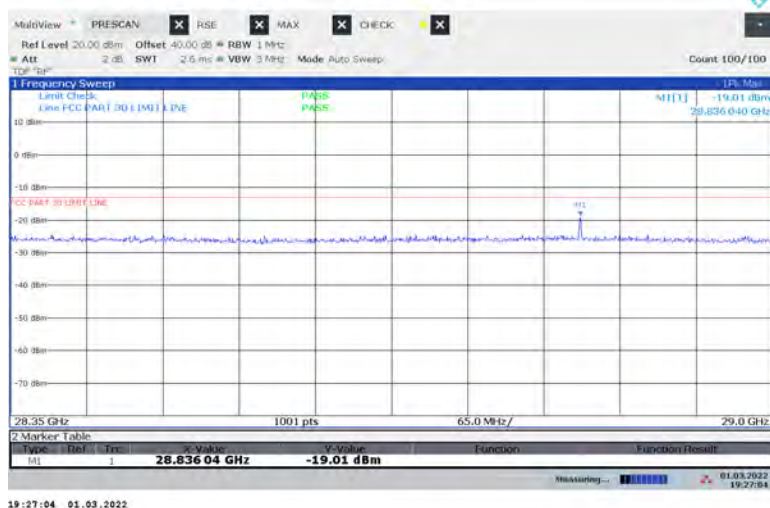


28.35 - 29 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

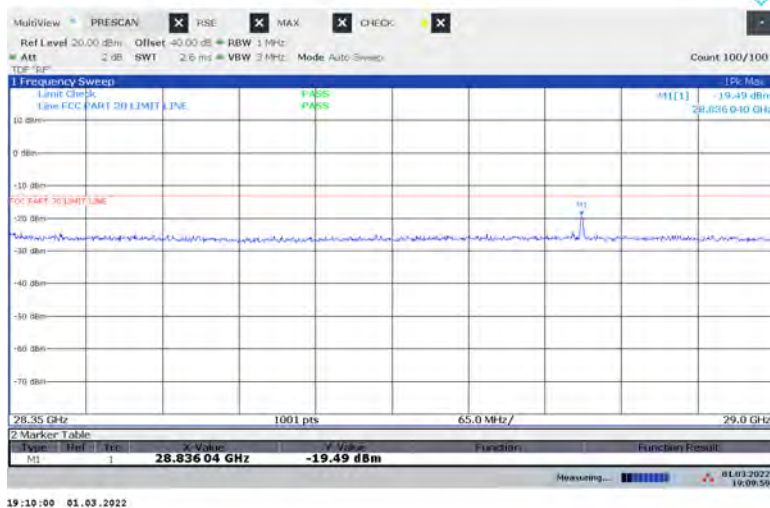


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

28.35 - 29 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

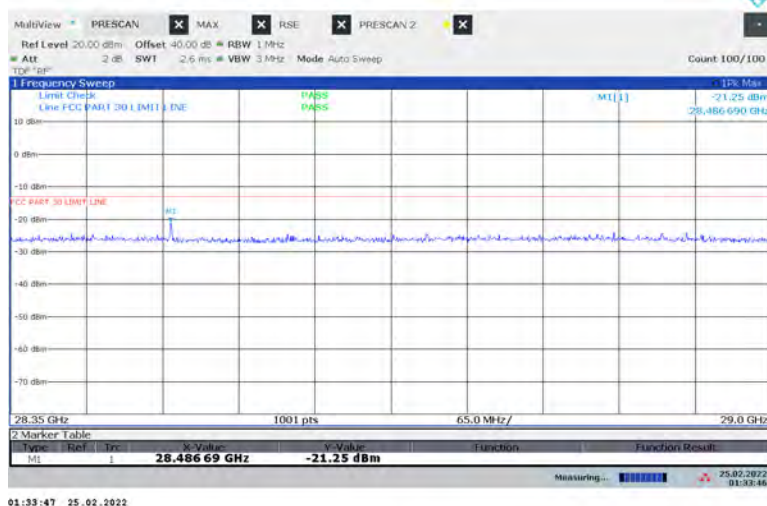

28.35 - 29 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

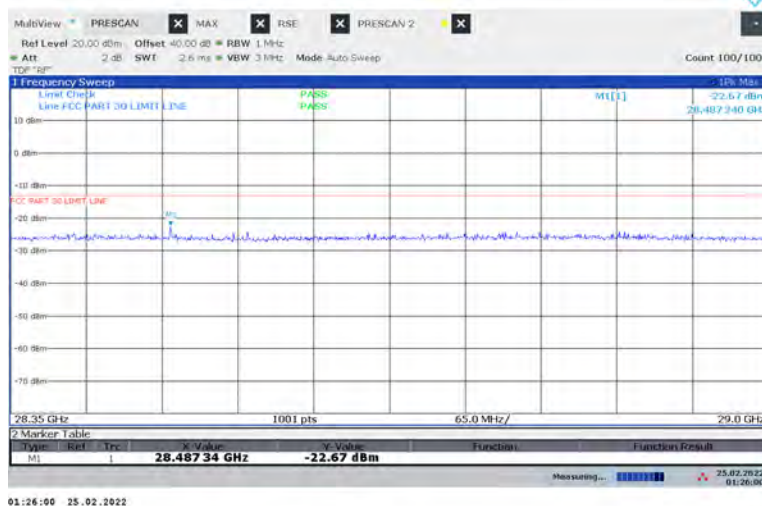


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

28.35 - 29 GHz n261, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	28.836	3	H	-31.61	-13	-18.61
M2	28.836	3	V	-31.17	-13	-18.17
M3	28.487	3	H	-33.13	-13	-20.13
M3	28.487	3	V	-28.88	-13	-15.88

28.35 - 29 GHz n261, 2CC

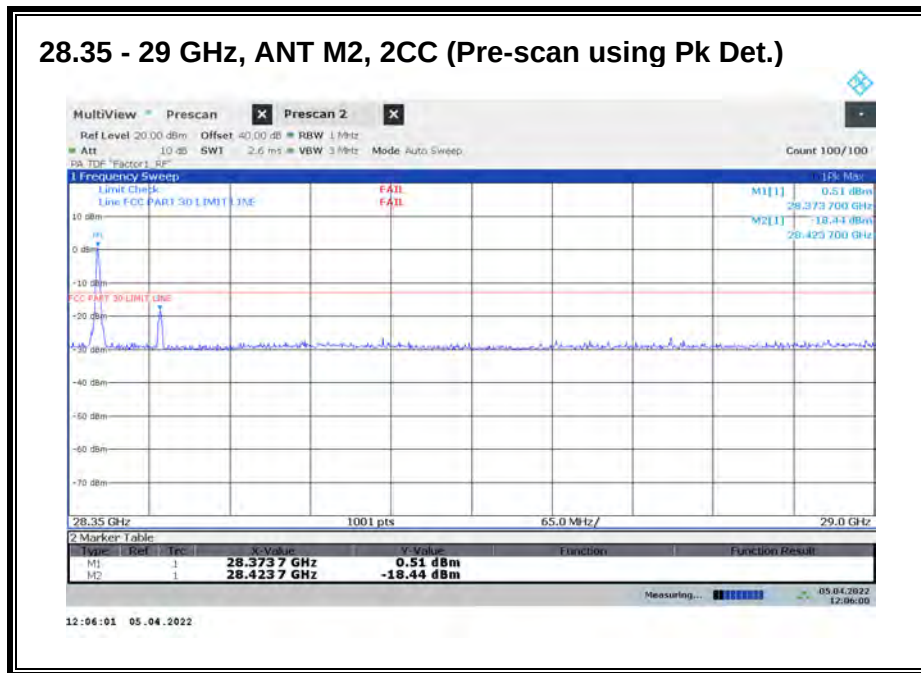


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	28.374	3	--	-14.34	-13	-1.34

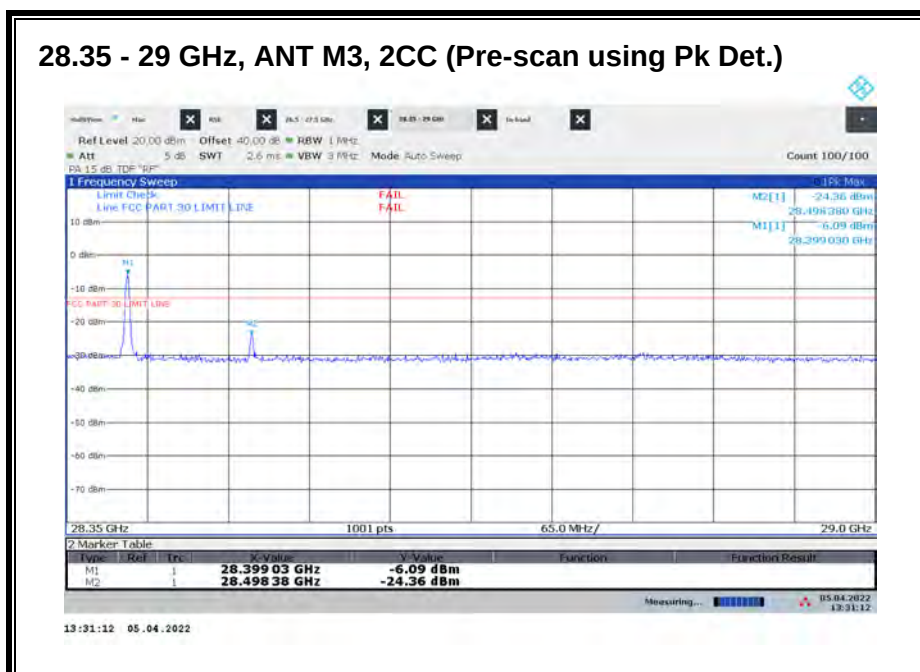

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	28.399	3	--	-13.98	-13	-0.98

28.35 - 29 GHz n261, 3CC

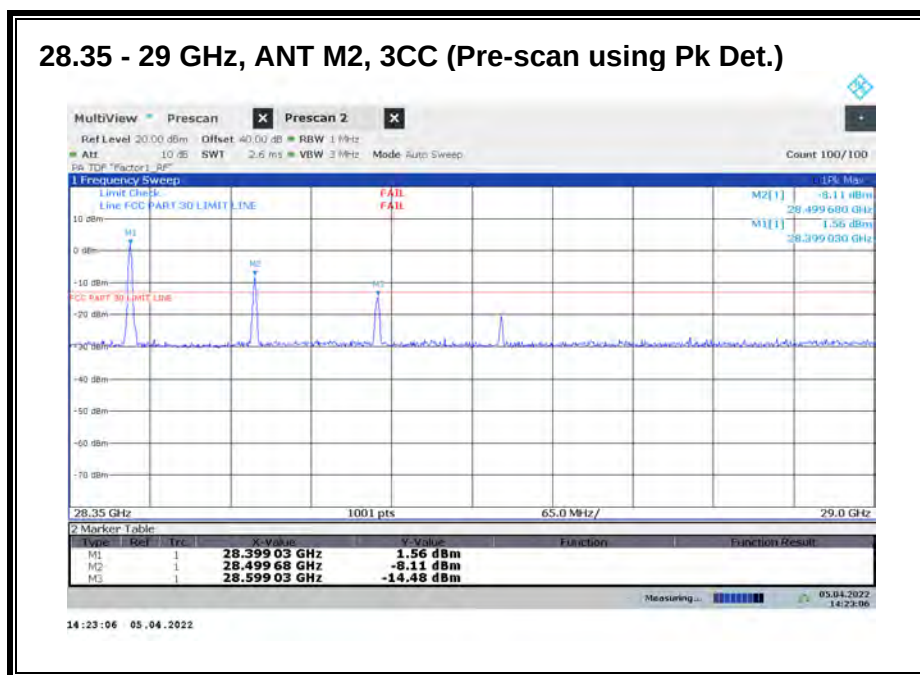


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz+ 100 MHz)_High CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	28.399	3	--	-14.21	-13	-1.21

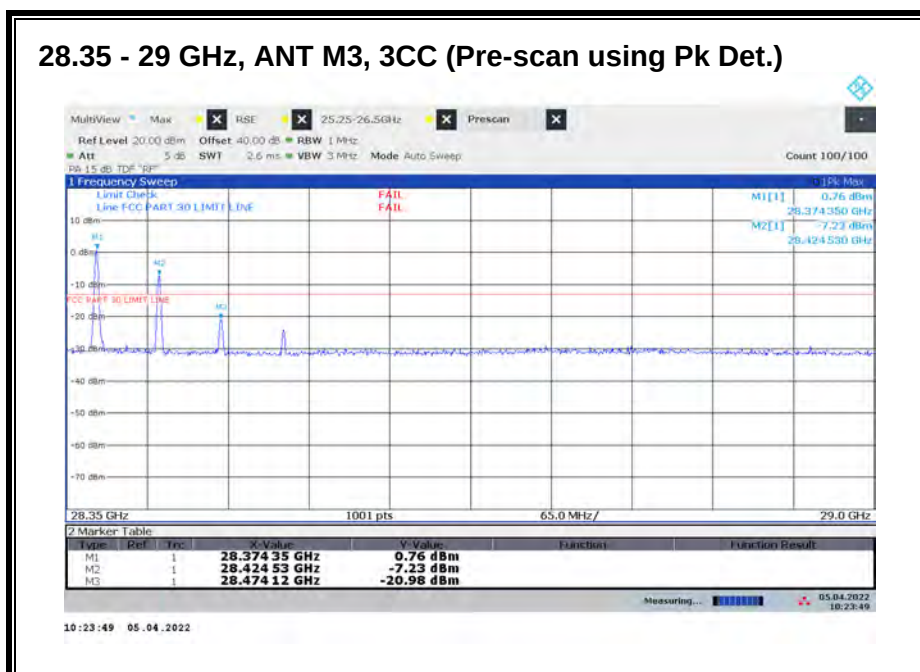

Worst case configuration:


SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	28.374	3	--	-13.95	-13	-0.95

28.35 - 29 GHz n261, 4CC

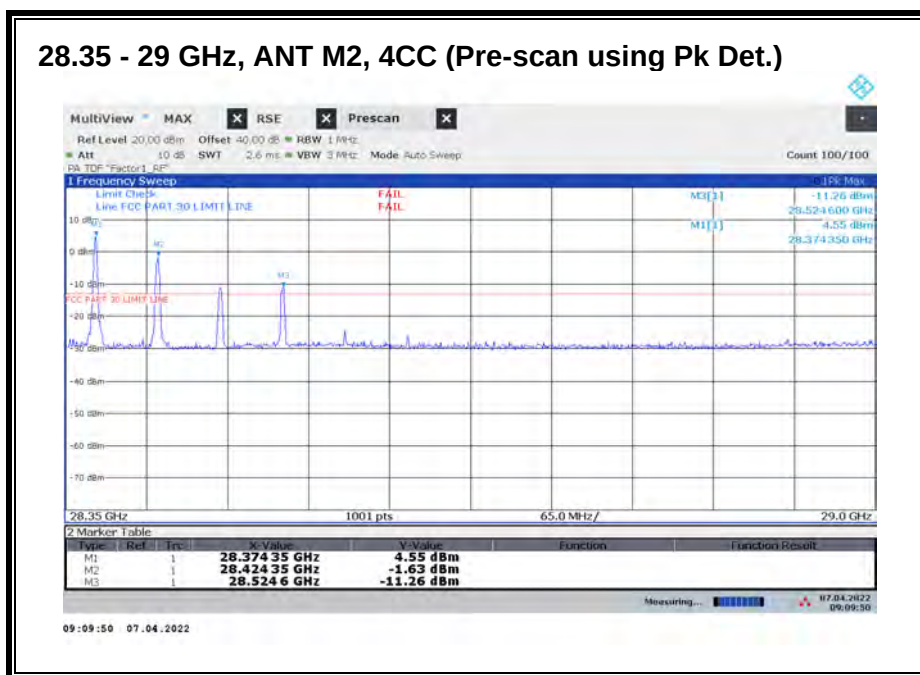


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz+ 50 MHz+ 50 MHz)_High CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	TRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	28.374	3	--	-20.77	-13	-7.77




All emissions were investigated and the highest emission was reported.


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	28.399	3	--	-14.22	-13	-1.22

8.4.25. RSE n261 29 – 40 GHz

29 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

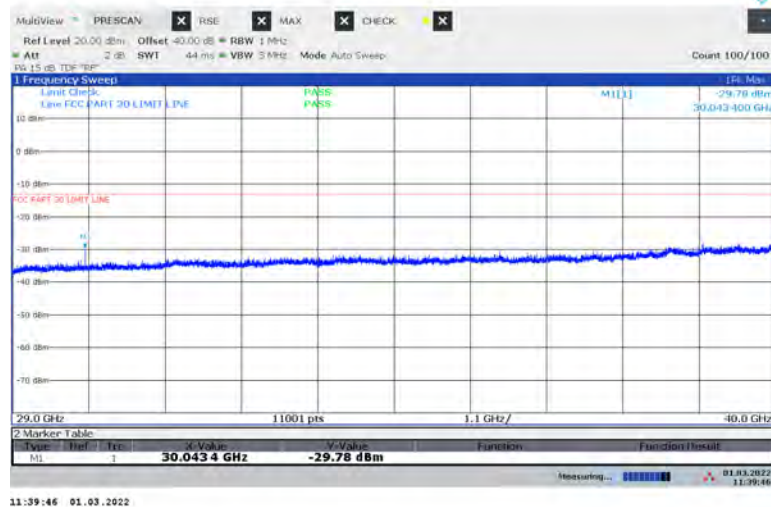


29 - 40 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

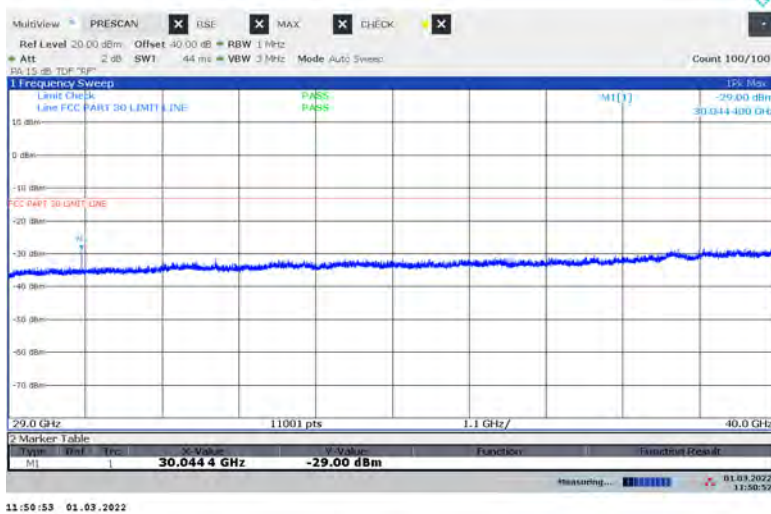


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

29 - 40 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

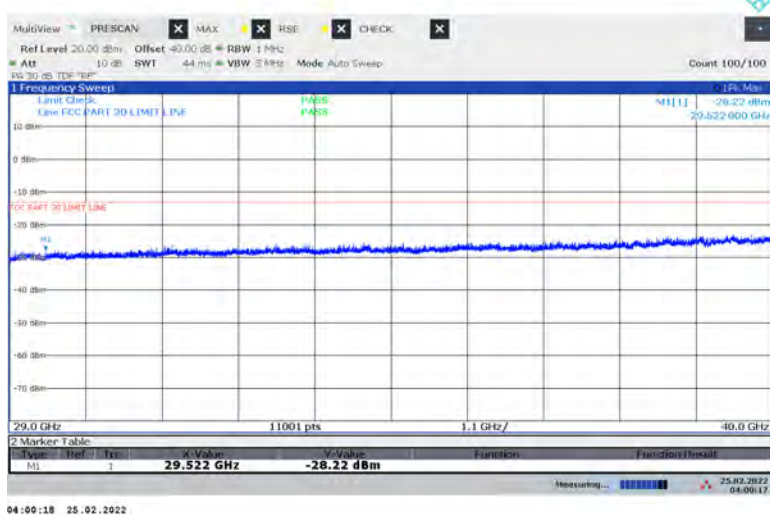

29 - 40 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical

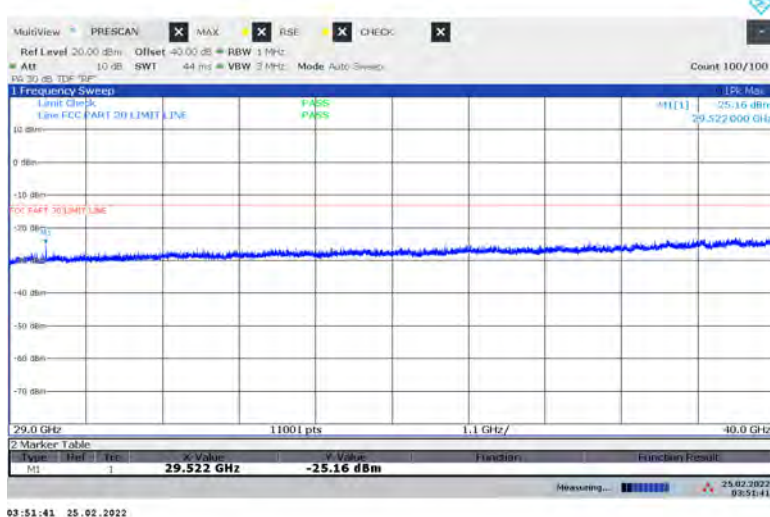

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.


29 - 40 GHz n261, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	30.044	3	H	-34.78	-13	-21.78
M2	30.044	3	V	-32.25	-13	-19.25
M3	29.522	3	H	-35.34	-13	-22.34
M3	29.522	3	V	-28.53	-13	-15.53

8.4.26. RSE n261 40 - 50 GHz


40 – 50 GHz, ANT M2 (Pre-scan using Pk Det.)

Horizontal

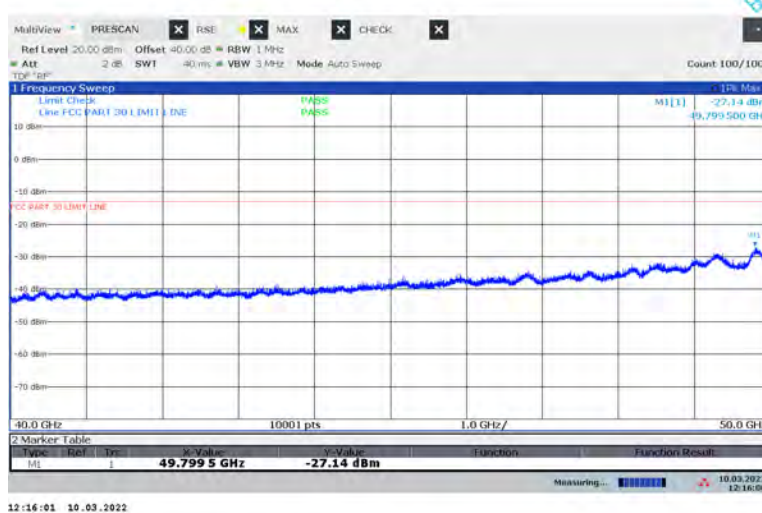


40 – 50 GHz, ANT M2 (Pre-scan using Pk Det.)

Vertical

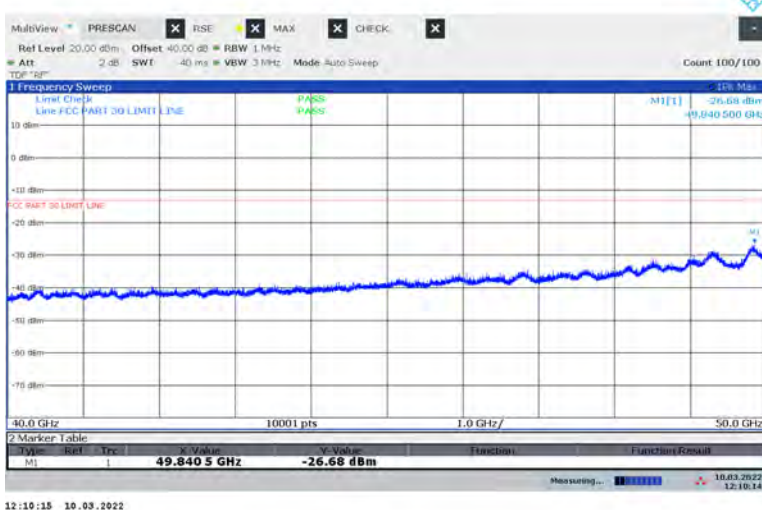


No emission detected using Peak Detection.

40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.)
Horizontal

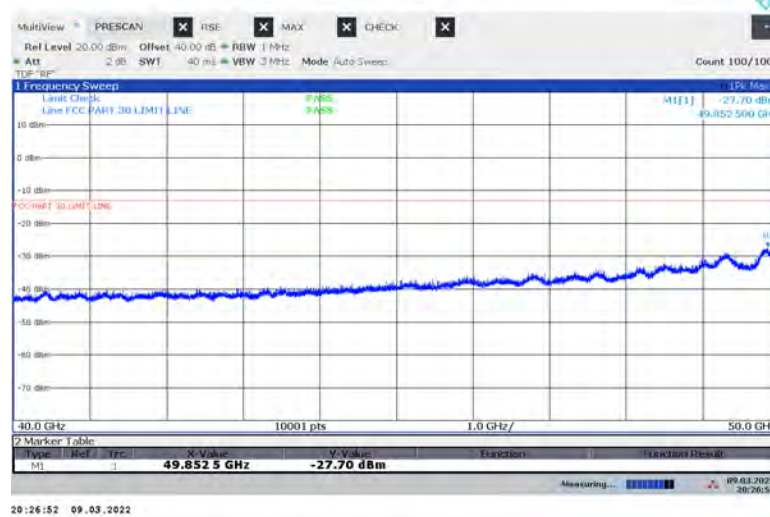


40 – 50 GHz, ANT M3 (Pre-scan using Pk Det.)
Vertical

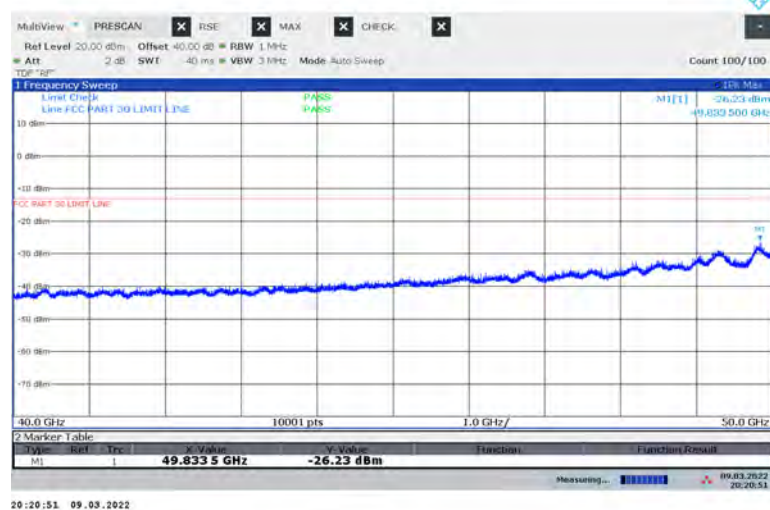


No emission detected using Peak Detection.

50 - 75 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

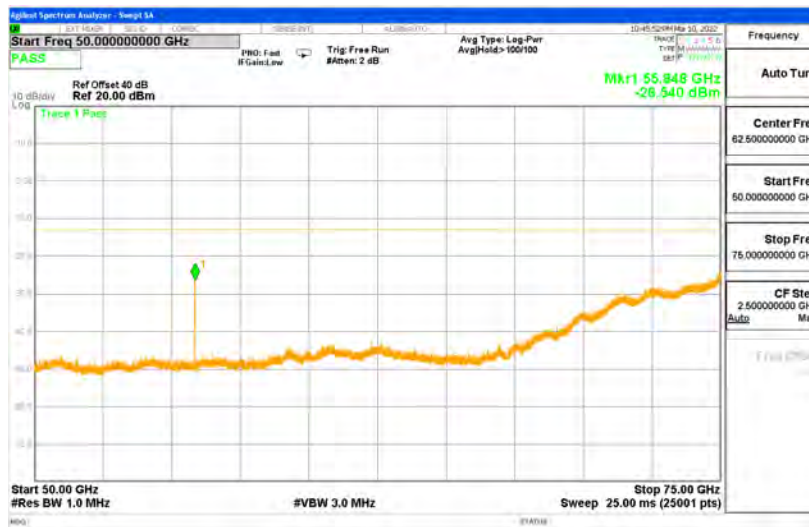

50 - 75 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical

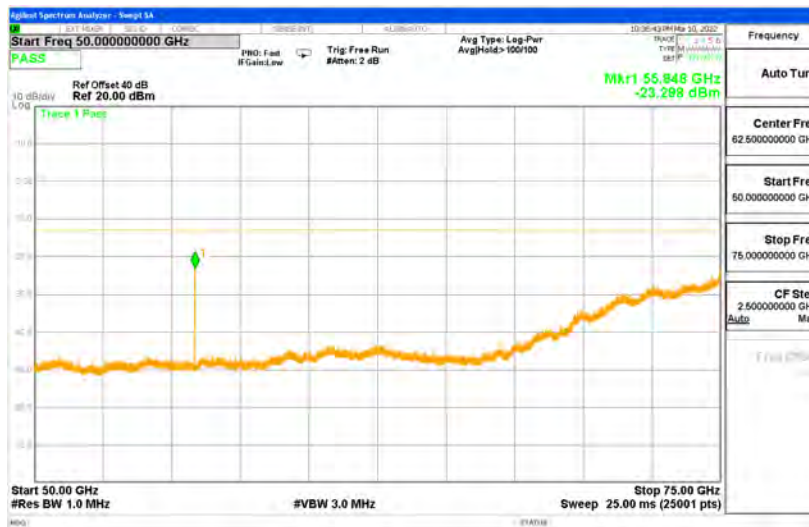


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

50 - 75 GHz n261, 1CC


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	56.647	1.5	H	-29.46	-13	-16.46
M2	56.647	1.5	V	-35.86	-13	-22.86
M3	55.848	1.5	H	-37.17	-13	-24.17
M3	55.848	1.5	V	-26.93	-13	-13.93

8.4.28. RSE n261 75 - 100 GHz

75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

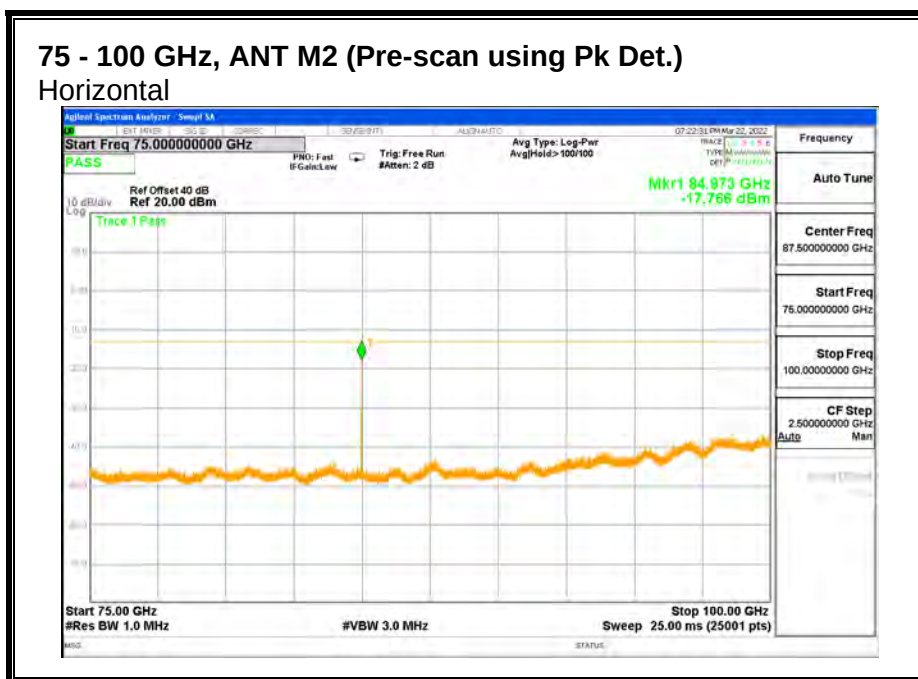


75 - 100 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

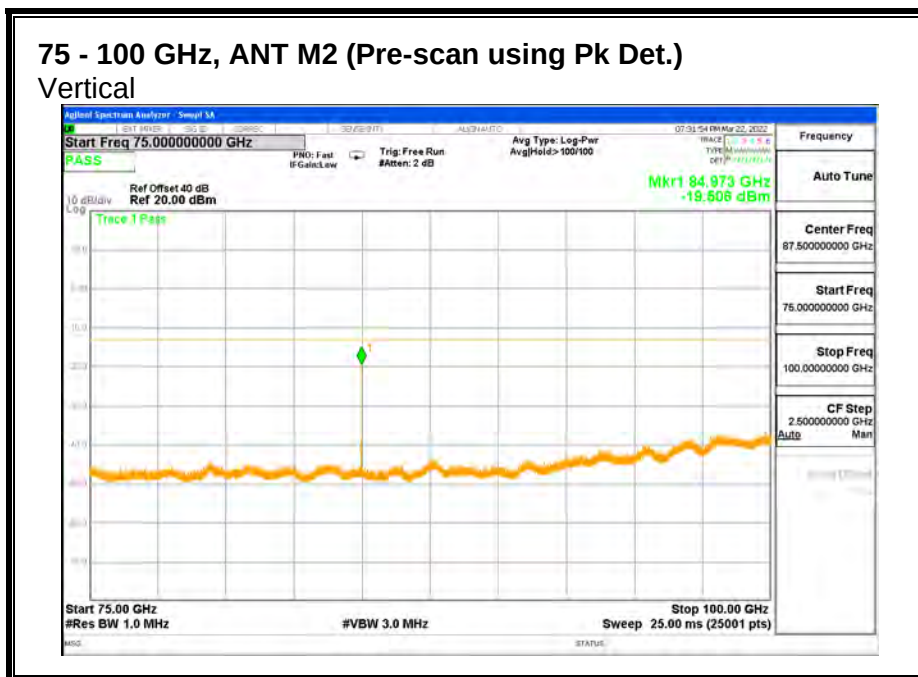


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured

75 - 100 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

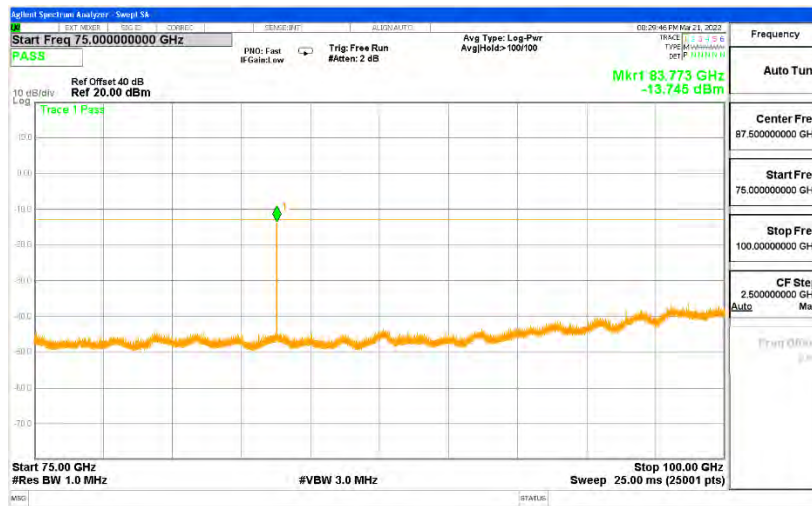

75 - 100 GHz, ANT M3 (Pre-scan using Pk Det.) Vertical

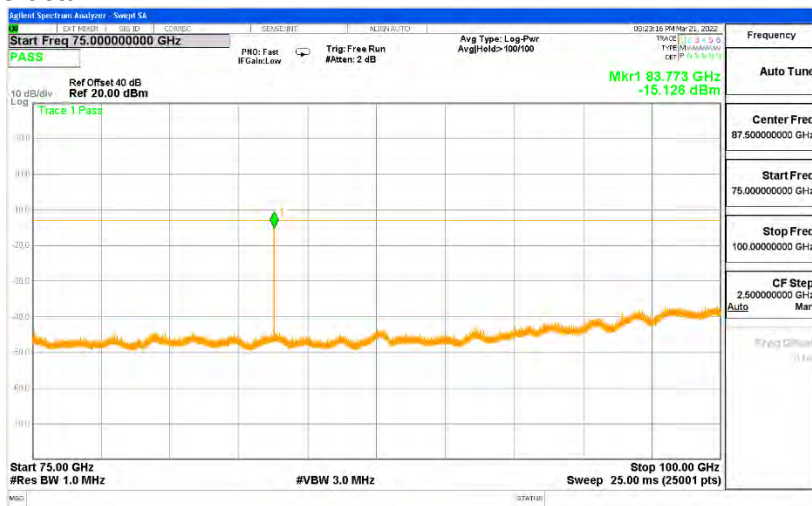


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured

75 - 100 GHz n261, 1CC


Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	84.973	1	H	-32.42	-13	-19.42
M2	84.973	1	V	-19.91	-13	-6.91
M3	83.773	1	H	-29.17	-13	-16.17
M3	83.773	1	V	-17.08	-13	-4.08

8.4.29. RSE n260 30 – 1000 MHz

30 – 1000 MHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

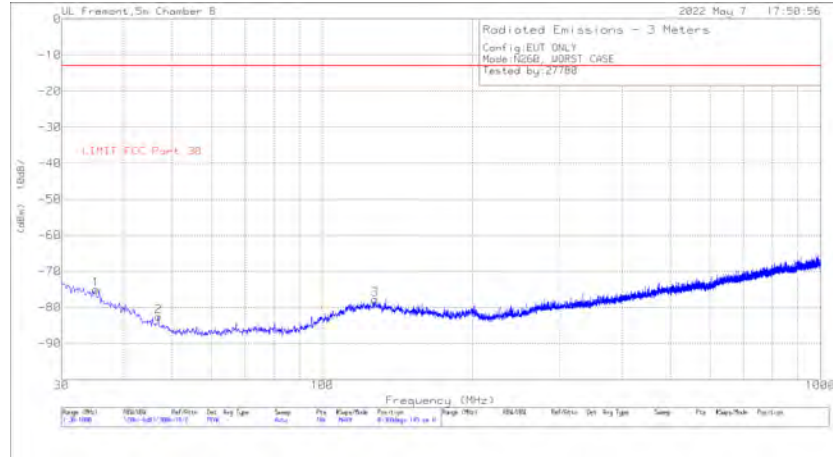

Vertical

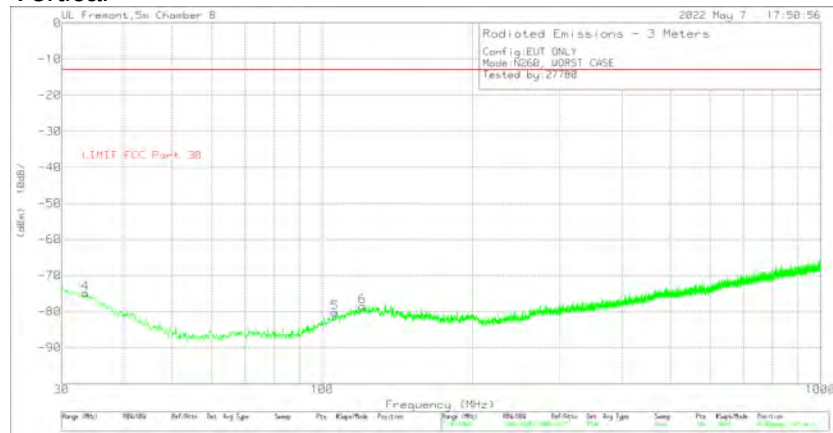


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dBm)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	33.492	-79.38	Pk	24.3	-31.5	11.7	-74.88	-13	-61.88	0-360	149	V
1	35.141	-78.36	Pk	23.1	-31.5	11.7	-75.06	-13	-62.06	0-360	149	H
2	46.975	-77.98	Pk	15.1	-31.3	11.7	-82.48	-13	-69.48	0-360	149	H
5	105.951	-78.93	Pk	17.7	-30.8	11.7	-80.33	-13	-67.33	0-360	149	V
6	120.501	-79.39	Pk	19.9	-30.7	11.7	-78.49	-13	-65.49	0-360	149	V
3	127.679	-78.77	Pk	19.9	-30.6	11.7	-77.77	-13	-64.77	0-360	149	H


Pk - Peak detector

30 – 1000 MHz, ANT M3 (Pre-scan using Pk Det.)

Horizontal

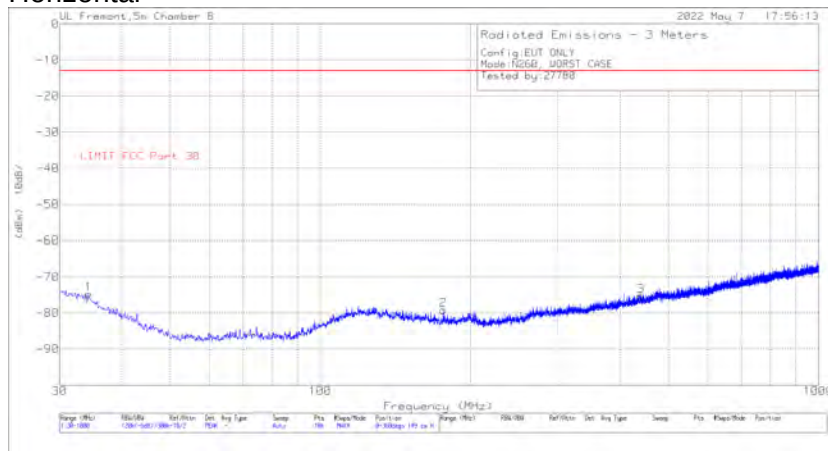

Vertical

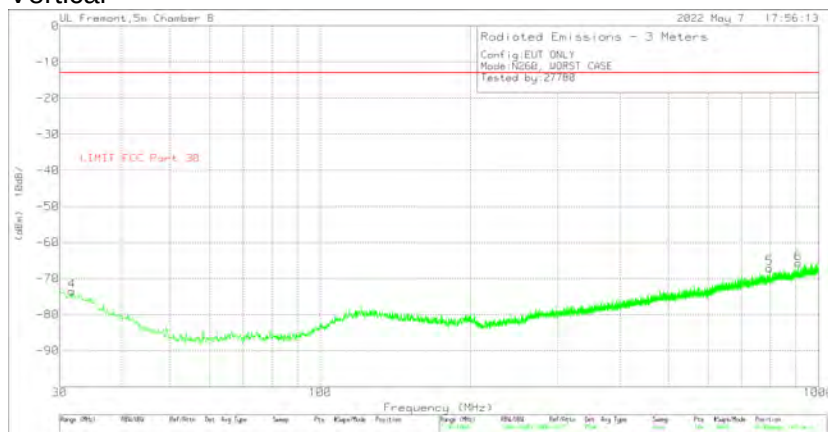


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 203089 (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	31.746	-79.28	Pk	25.5	-31.5	11.7	-73.58	-13	-60.58	0-360	149	V
1	34.268	-78.83	Pk	23.8	-31.5	11.7	-74.83	-13	-61.83	0-360	149	H
2	176.47	-77.83	Pk	17.2	-30.2	11.7	-79.13	-13	-66.13	0-360	149	H
3	439.534	-80.03	Pk	22.3	-29.2	11.7	-75.23	-13	-62.23	0-360	149	H
5	796.591	-78.7	Pk	27.6	-27.8	11.7	-67.2	-13	-54.2	0-360	149	V
6	909.693	-79.54	Pk	28.8	-26.7	11.7	-65.74	-13	-52.74	0-360	149	V


Pk - Peak detector

8.4.30. RSE n260 1 - 18 GHz

1 - 18 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

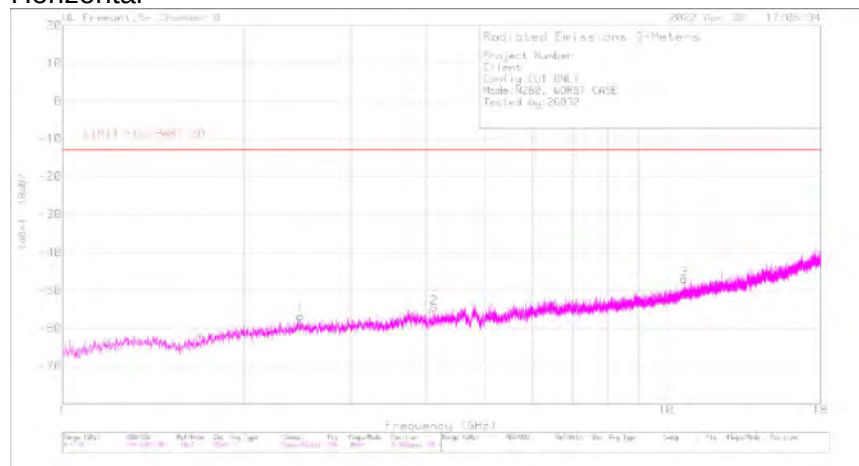

Vertical

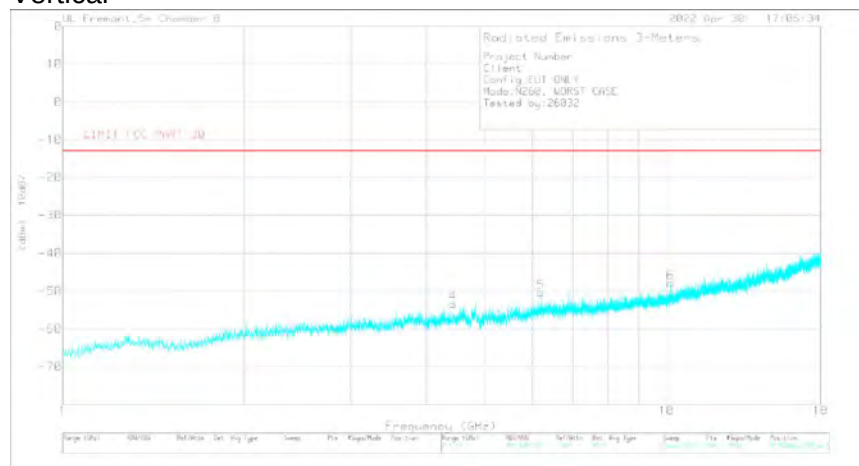


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Amp/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.476525	-66.18	Pk	32.5	-34.8	11.7	-56.78	-13	-43.78	0-360	150	H
2	4.123908	-68.34	Pk	33.7	-31.6	11.7	-54.54	-13	-41.54	0-360	150	H
4	4.431624	-68.02	Pk	33.8	-30.8	11.7	-53.32	-13	-40.32	0-360	150	V
5	6.195463	-69.67	Pk	36	-28.3	11.7	-50.27	-13	-37.27	0-360	150	V
6	10.167714	-71.77	Pk	37.2	-24.9	11.7	-47.77	-13	-34.77	0-360	150	V
3	10.708341	-72.56	Pk	38	-24.1	11.7	-46.96	-13	-33.96	0-360	150	H

Pk - Peak detector

1 – 18 GHz, ANT M3 (Pre-scan using Pk Det.) Horizontal

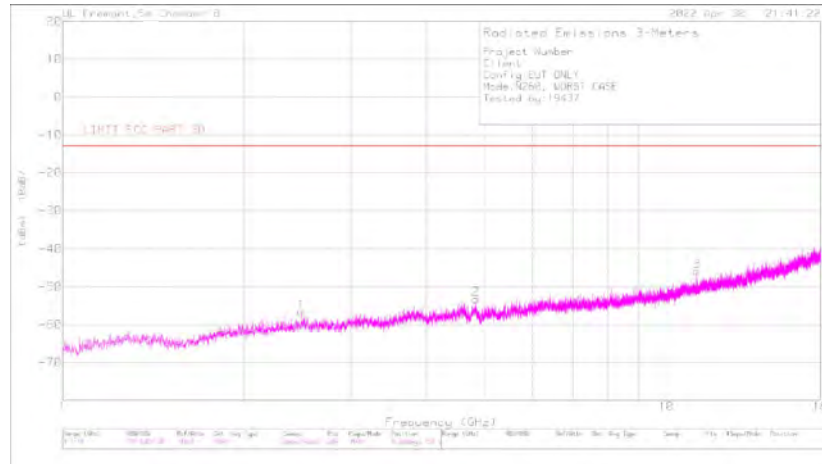

Vertical

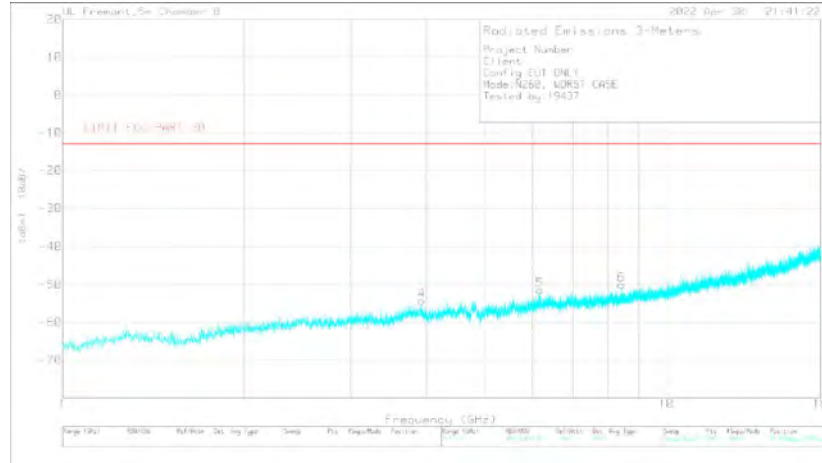


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T345 (dB/m)	Ampl/Cbl (dB)	Unit Conversion (dB)	Corrected Reading (dBm)	LIMIT FCC PART 30 (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484175	-66.19	Pk	32.6	-34.7	11.7	-56.59	-13	-43.59	0-360	150	H
4	3.934348	-67.77	Pk	33.8	-32	11.7	-54.27	-13	-41.27	0-360	150	V
2	4.834544	-68.86	Pk	34.1	-30.2	11.7	-53.26	-13	-40.26	0-360	150	H
5	6.173362	-70.98	Pk	36	-28.2	11.7	-51.48	-13	-38.48	0-360	150	V
6	8.424276	-71.97	Pk	35.8	-25.6	11.7	-50.07	-13	-37.07	0-360	150	V
3	11.220067	-72.93	Pk	37.9	-22.5	11.7	-45.83	-13	-32.83	0-360	150	H


Pk - Peak detector

8.4.31. RSE n260 18 - 26.5 GHz

18 - 26.5 GHz, ANT M2 (Pre-scan using Pk Det.) Horizontal

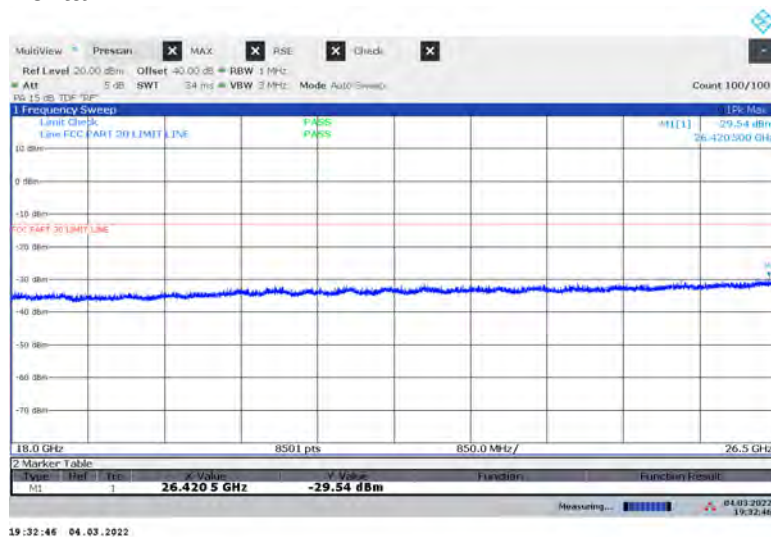


18 - 26.5 GHz, ANT M2 (Pre-scan using Pk Det.) Vertical

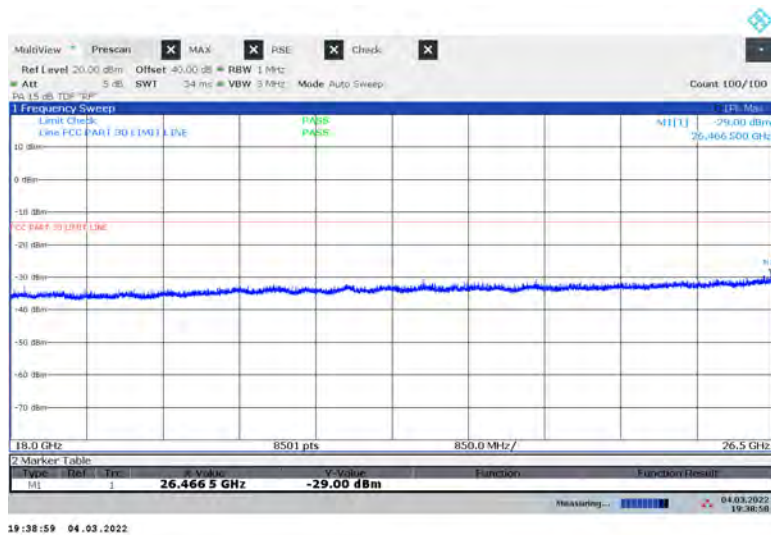


No emission detected using Peak Detection.

18 - 26.5 GHz, ANT M3 (Pre-scan using Pk Det.)
Horizontal

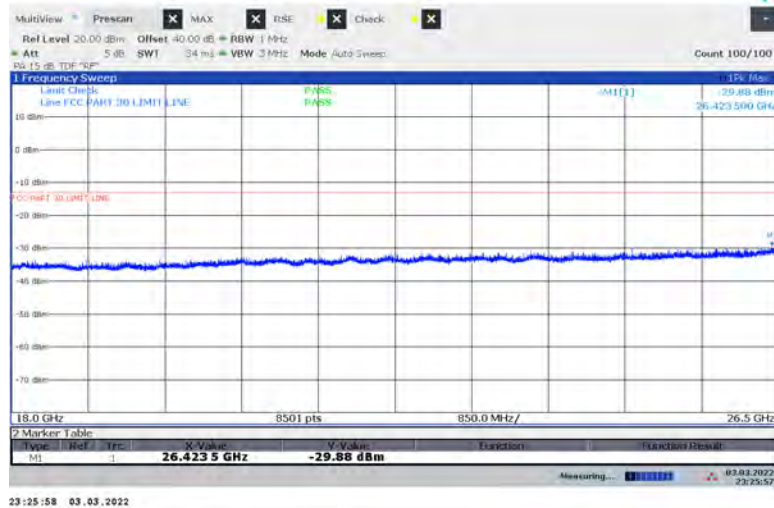


18 - 26.5 GHz, ANT M3 (Pre-scan using Pk Det.)
Vertical

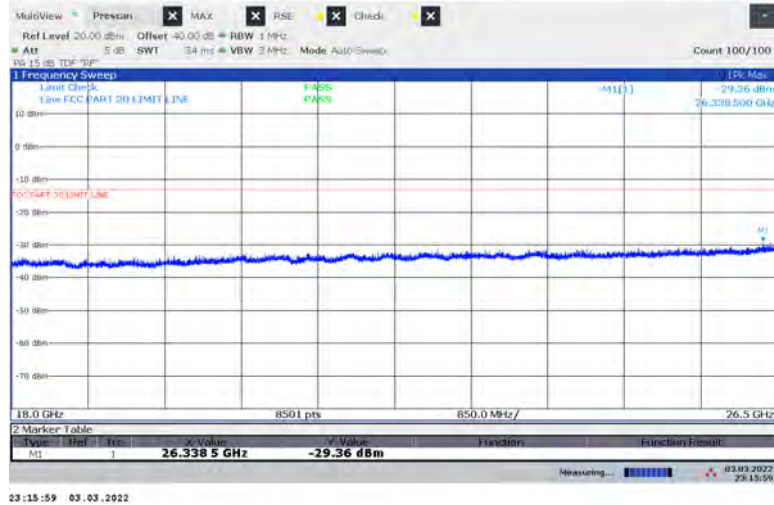


No emission detected using Peak Detection.

8.4.32. RSE n260 26.5 - 36 GHz

26.5 - 36 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Horizontal

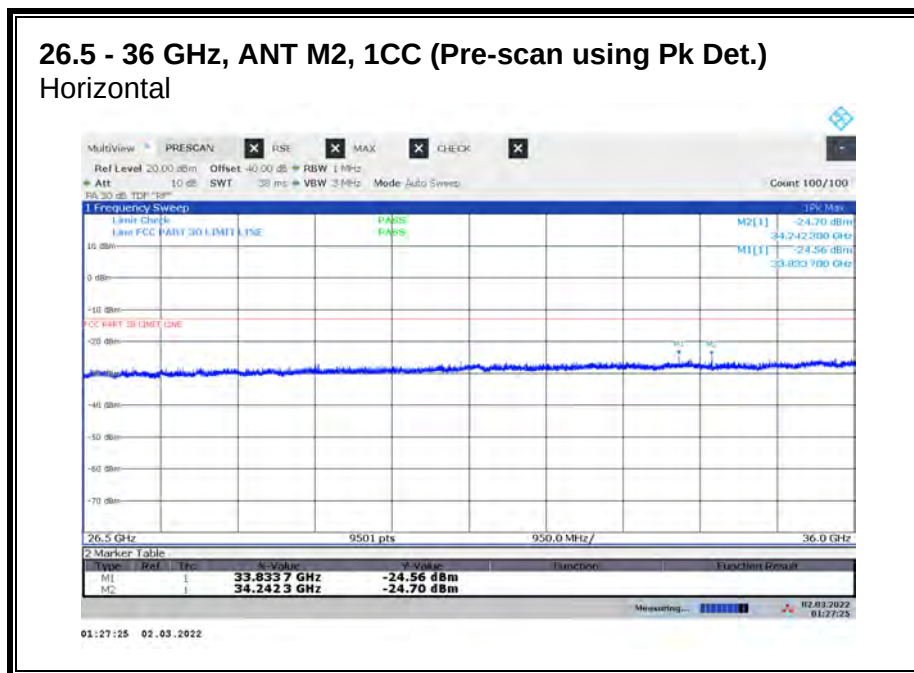


26.5 - 36 GHz, ANT M2, 1CC (Pre-scan using Pk Det.) Vertical

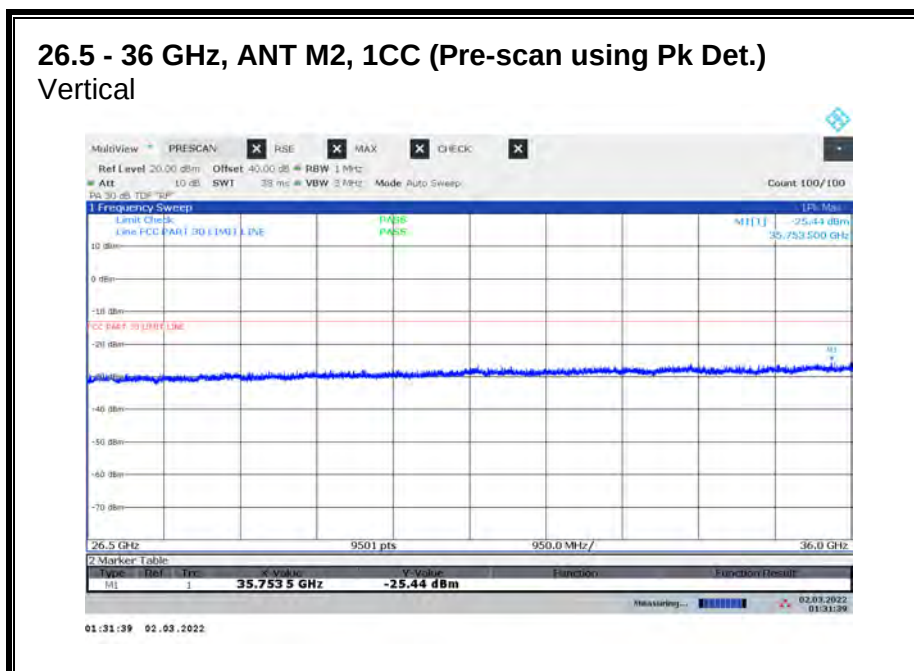


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

26.5 - 36 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

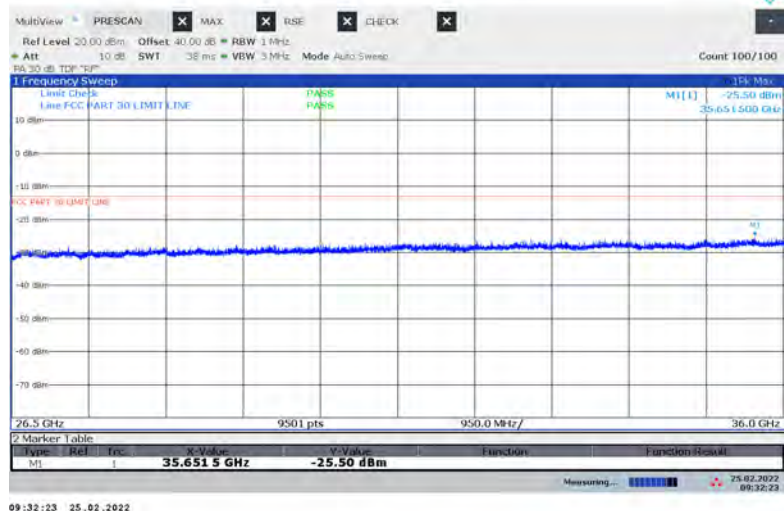

26.5 - 36 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

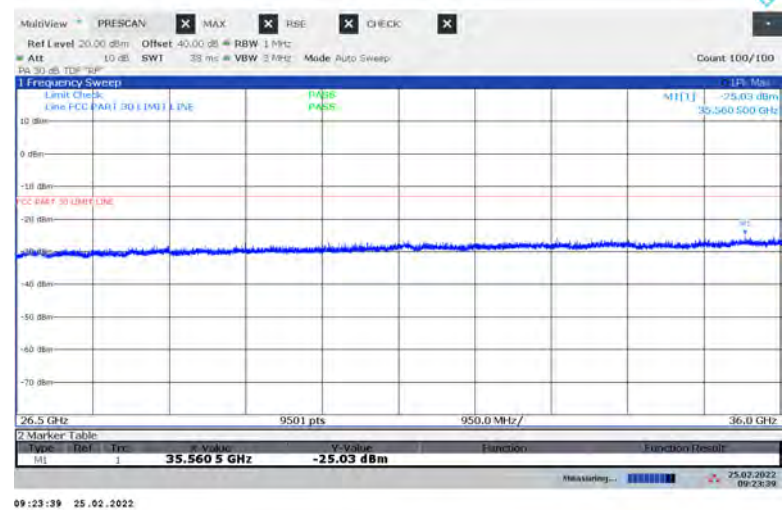

No emission detected using Peak Detection.


26.5 – 36 GHz n260, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	33.834	3	H	-38.60	-13	-25.60
M2	33.834	3	V	-38.73	-13	-25.73
M2	34.243	3	H	-34.65	-13	-21.65
M2	34.243	3	V	-38.35	-13	-25.35

8.4.33. RSE n260 36 – 37 GHz


36 - 37 GHz, ANT M2, 1CC (Pre-scan using Pk Det.)

Horizontal

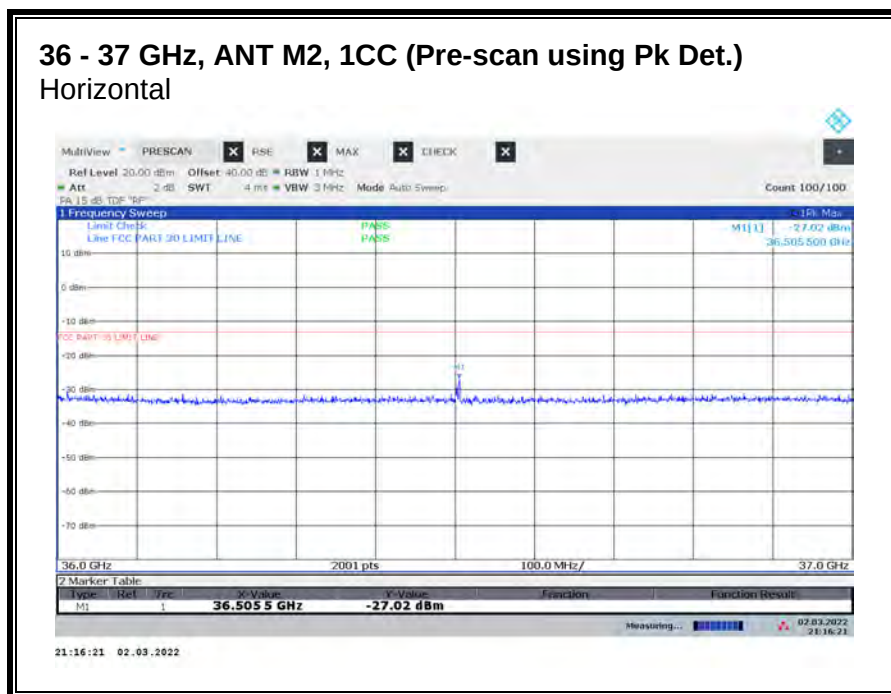


36 - 37 GHz, ANT M2, 1CC (Pre-scan using Pk Det.)

Vertical

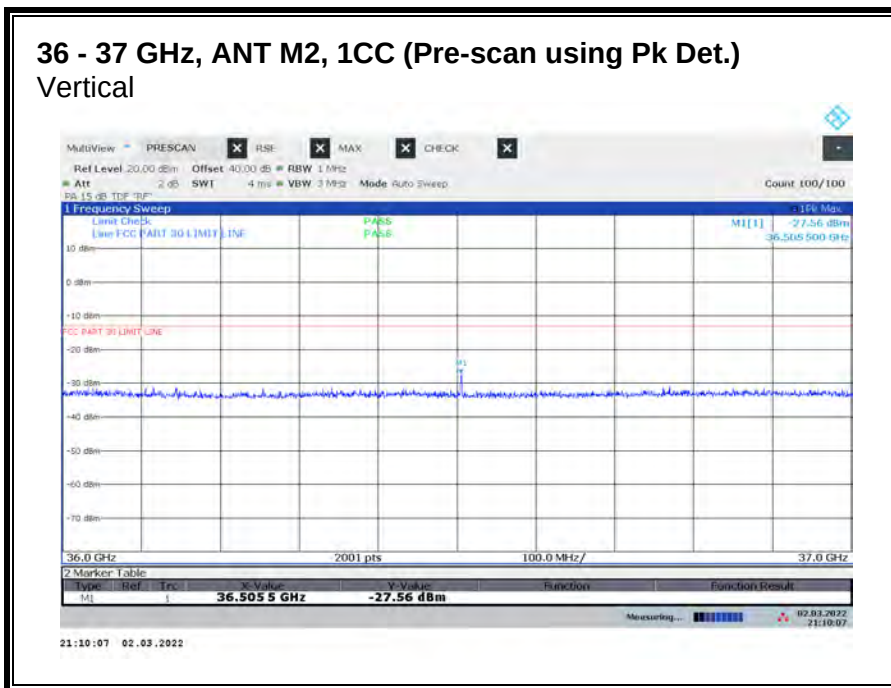


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

36 - 37 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Horizontal

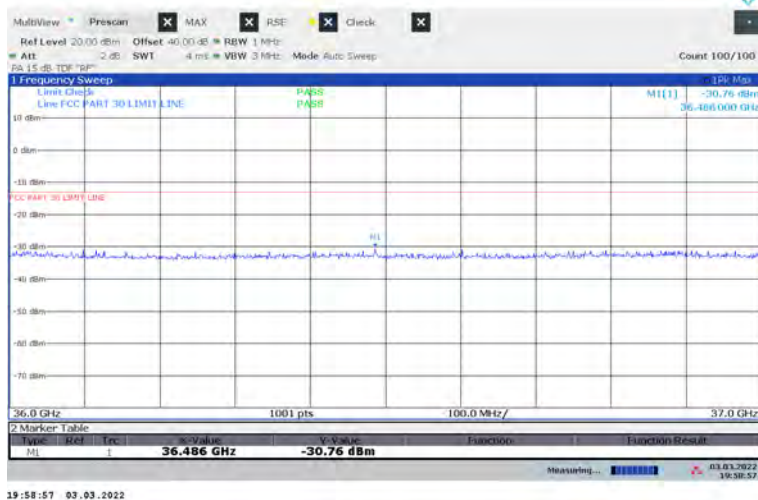

36 - 37 GHz, ANT M3, 1CC (Pre-scan using Pk Det.)
Vertical

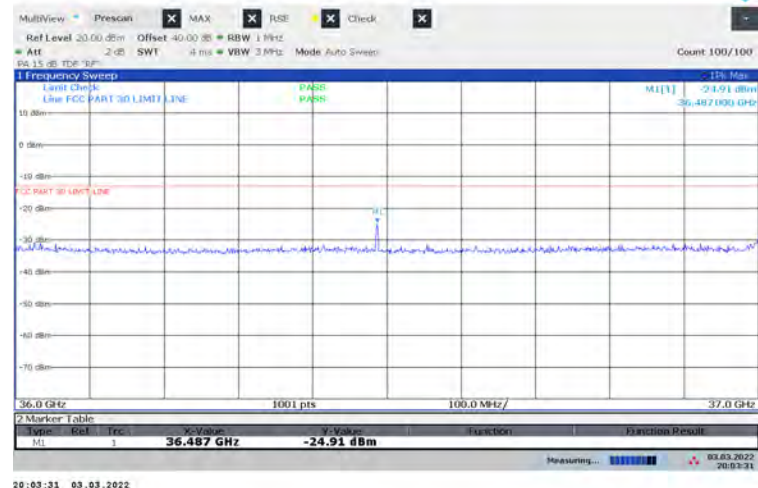


Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

36 - 37 GHz n260, 1CC

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	36.506	3	H	-28.94	-13	-15.94
M2	36.506	3	V	-35.44	-13	-22.44
M3	36.486	3	H	-32.94	-13	-19.94
M3	36.486	3	V	-26.75	-13	-13.75

36 - 37 GHz n260, 2CC

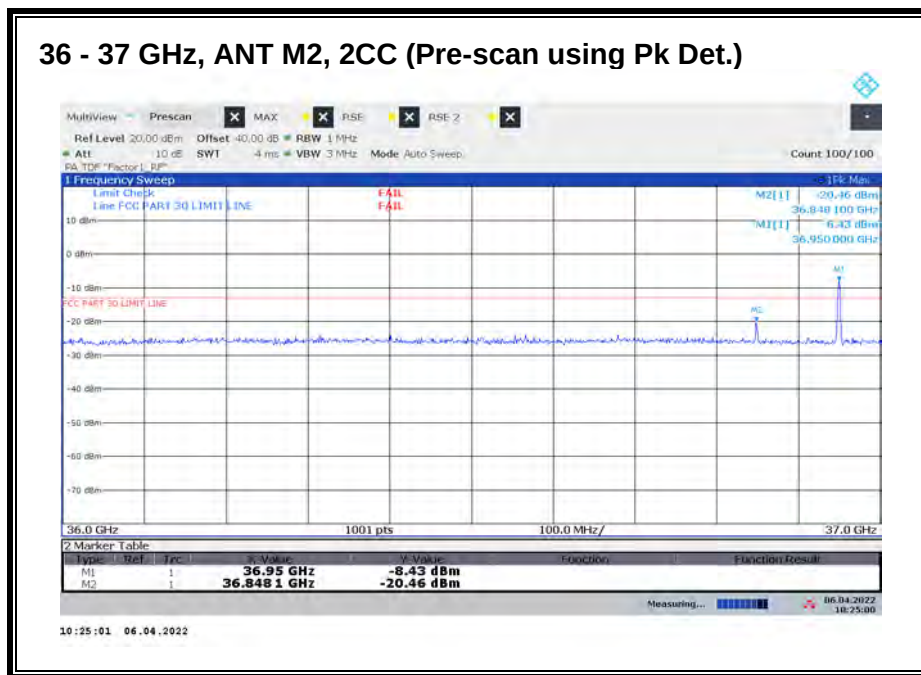


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	36.949	3	--	-16.39	-13	-3.39

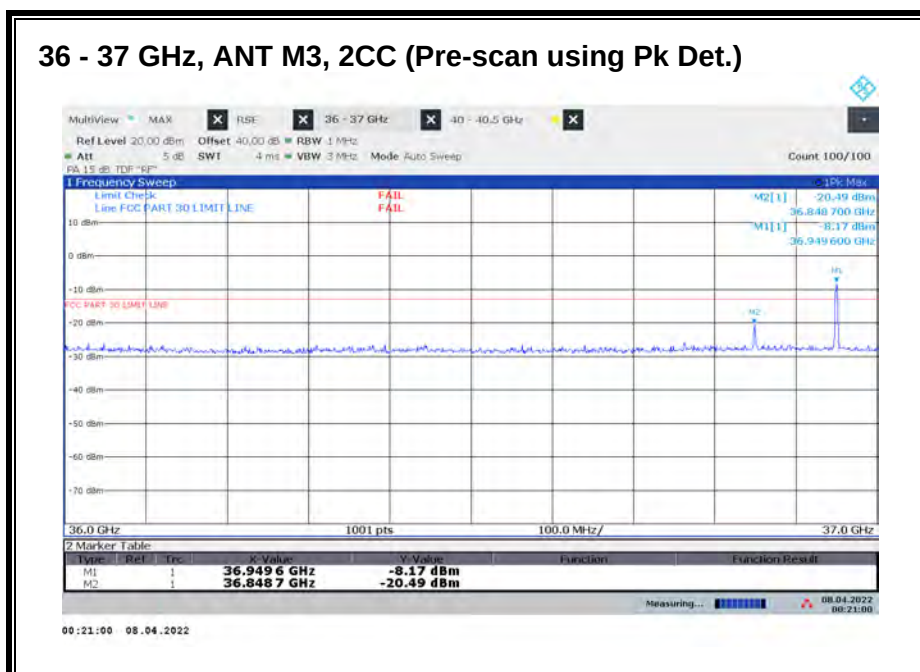

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	36.949	3	--	-22.60	-13	-9.60

36 - 37 GHz n260, 3CC

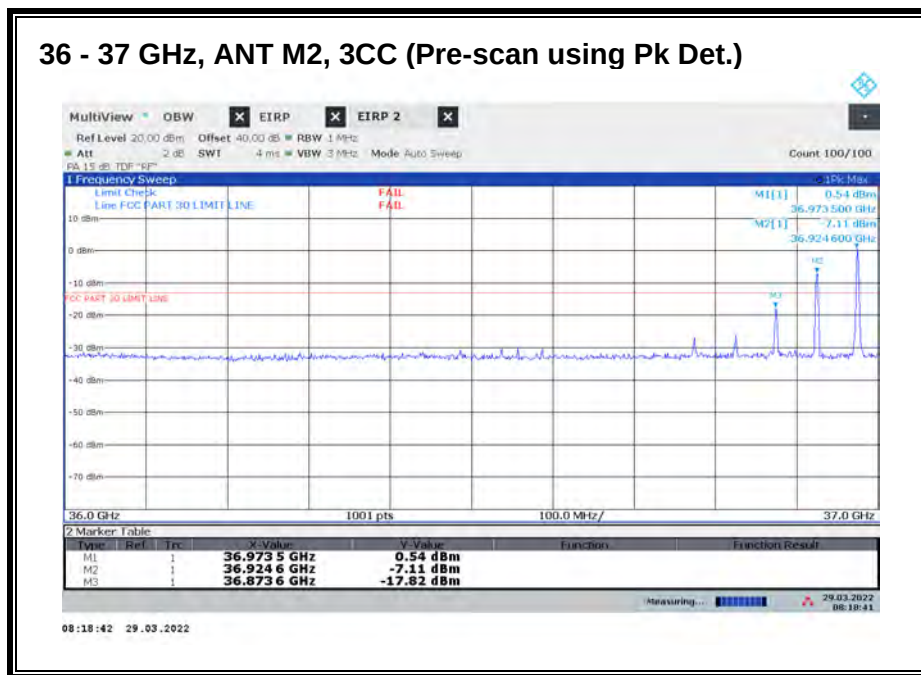


Worst case configuration:

SISO-DUAL_QPSK_(50 MHz + 50 MHz + 50 MHz)_Low CH_RB Offset 1/15 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	36.974	3	--	-17.83	-13	-4.83

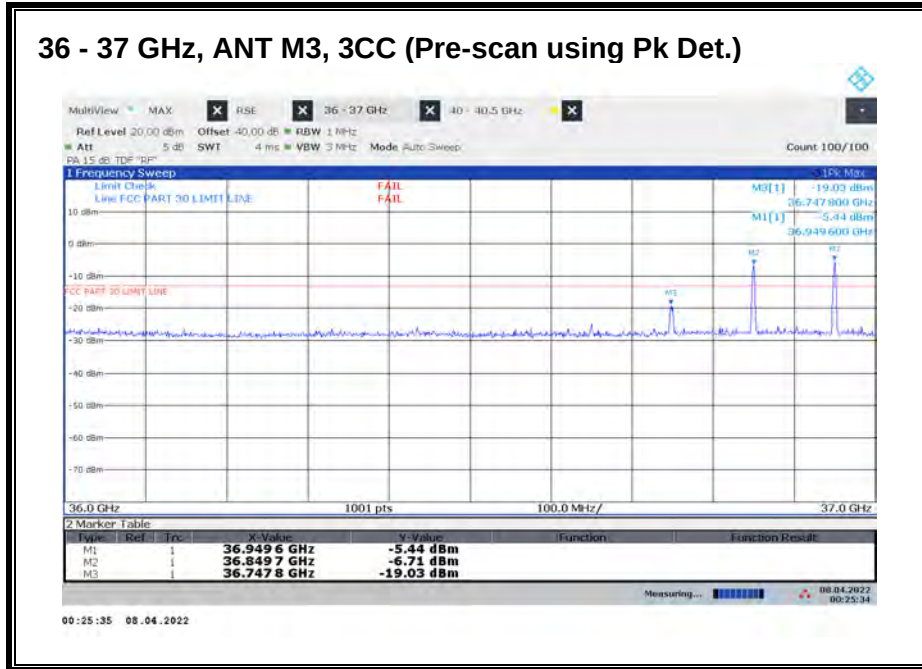

Worst case configuration:


SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	36.949	3	--	-17.76	-13	-4.76

36 - 37 GHz n260, 4CC

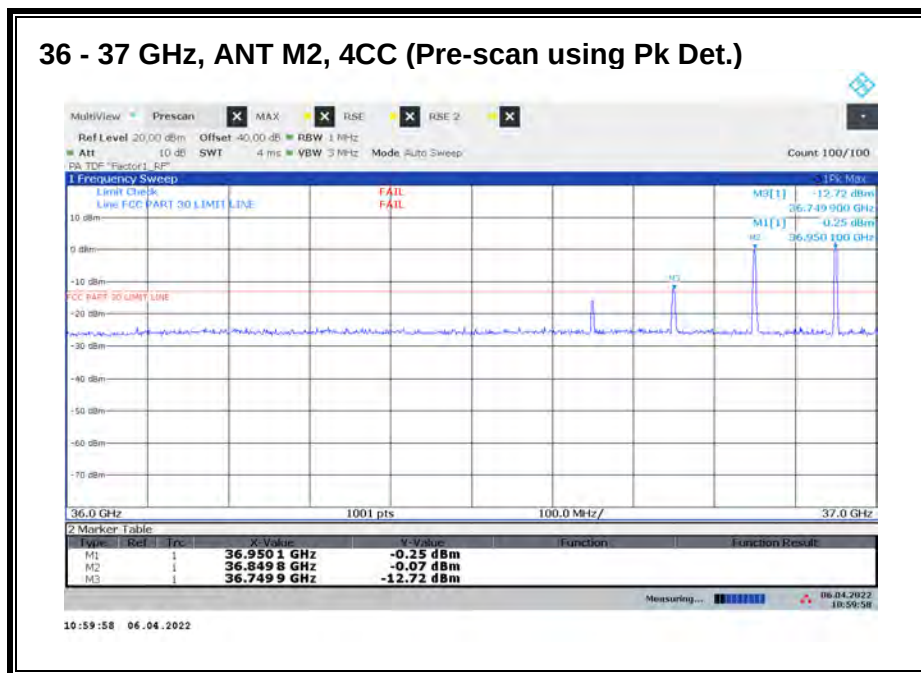


Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M2	36.949	3	--	-14.73	-13	-1.73

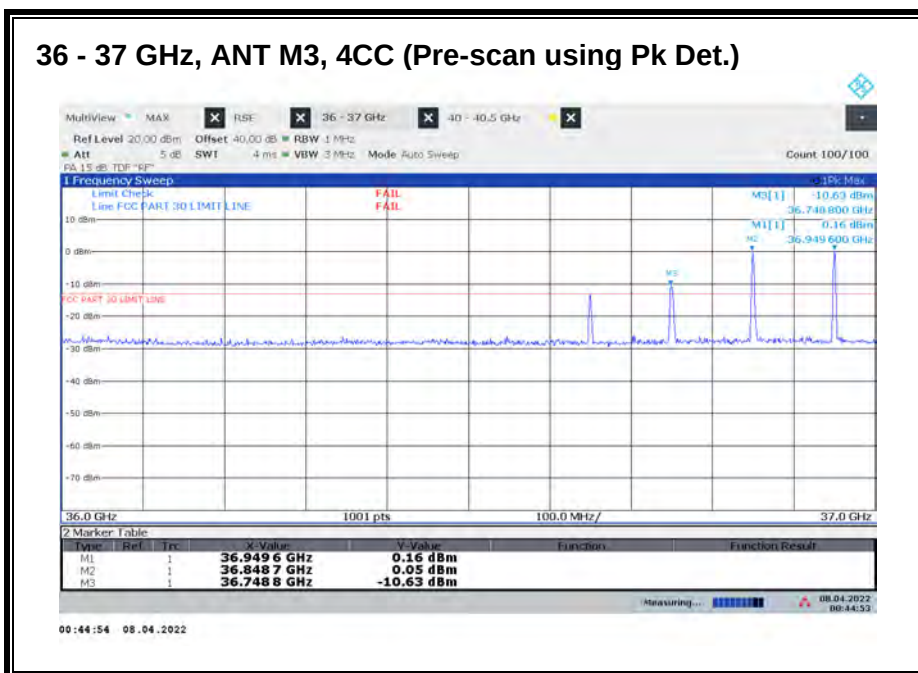

Worst case configuration:

SISO-DUAL_QPSK_(100 MHz + 100 MHz + 100 MHz + 100 MHz)_Low CH_RB Offset 1/32 (1RB-M)

Emissions detected using Peak Detection at pre-scan. Avg EIRP was measured.

All emissions were investigated and the highest emission was reported.

Antenna	Freq.	Meas. Distance	Rx Ant. Polarity	Corrected Avg EIRP	TRP Limit	Margin
	(GHz)	(m)	H/V	(dBm)	(dBm)	(dB)
M3	36.949	3	--	-18.41	-13	-5.41