



CERTIFICATION TEST REPORT

Report Number. : 16U23813-E4V5

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A

Model : A1822

FCC ID : BCGA1822

EUT Description : TABLET DEVICE

Test Standard : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
February 15, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/24/2017	Initial Issue	Chin Pang
V2	02/06/2017	Remove IC Data	Francisco Guarnero
V3	02/08/2017	TCB Revision	Francisco Guarnero
V4	02/10/2017	Address TCB's questions	Chin Pang
V5	02/15/2017	Address TCB's questions	Devin Chang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	12
2. TEST METHODOLOGY	13
3. FACILITIES AND ACCREDITATION	13
4. CALIBRATION AND UNCERTAINTY	14
4.1. MEASURING INSTRUMENT CALIBRATION	14
4.2. SAMPLE CALCULATION	14
4.3. MEASUREMENT UNCERTAINTY	14
5. EQUIPMENT UNDER TEST.....	15
5.1. DESCRIPTION OF EUT.....	15
5.2. MAXIMUM OUTPUT POWER	15
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	18
5.4. SOFTWARE AND FIRMWARE	18
5.5. WORST-CASE CONFIGURATION AND MODE.....	19
5.6. DESCRIPTION OF TEST SETUP	20
6. TEST AND MEASUREMENT EQUIPMENT	26
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	27
7.1. ON TIME AND DUTY CYCLE.....	27
7.2. MEASUREMENT METHODS.....	31
8. ANTENNA PORT TEST RESULTS.....	32
8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND.....	32
8.1.1. 26 dB BANDWIDTH	32
8.1.2. 99% BANDWIDTH.....	35
8.1.3. AVERAGE POWER.....	38
8.1.4. OUTPUT POWER AND PSD	39
8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND.....	43
8.2.1. 26 dB BANDWIDTH	43
8.2.2. 99% BANDWIDTH.....	46
8.2.3. AVERAGE POWER.....	49
8.2.4. OUTPUT POWER AND PSD	50
8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND.....	54
8.3.1. 26 dB BANDWIDTH	54
8.3.2. 99% BANDWIDTH.....	58
8.3.3. AVERAGE POWER.....	62
8.3.4. OUTPUT POWER AND PSD	63
8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND.....	69
8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND.....	70
8.5.1. 26 dB BANDWIDTH	70

8.5.2.	99% BANDWIDTH.....	72
8.5.3.	AVERAGE POWER.....	74
8.5.4.	OUTPUT POWER AND PSD	75
8.6.	<i>802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND.....</i>	<i>78</i>
8.6.1.	26 dB BANDWIDTH	78
8.6.2.	99% BANDWIDTH.....	80
8.6.3.	AVERAGE POWER.....	82
8.6.4.	OUTPUT POWER AND PSD	83
8.7.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND.....</i>	<i>86</i>
8.7.1.	26 dB BANDWIDTH	86
8.7.2.	99% BANDWIDTH.....	89
8.7.3.	AVERAGE POWER.....	92
8.7.4.	OUTPUT POWER AND PSD	93
8.8.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND.....</i>	<i>98</i>
8.9.	<i>802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND.....</i>	<i>99</i>
8.9.1.	26 dB BANDWIDTH	99
8.9.2.	99% BANDWIDTH.....	100
8.9.3.	AVERAGE POWER.....	101
8.9.4.	OUTPUT POWER AND PSD	102
8.10.	<i>802.11ac VHT80 ANTENNA B MODE IN THE 5.2 GHz BAND</i>	<i>105</i>
8.10.1.	26 dB BANDWIDTH.....	105
8.10.2.	99% BANDWIDTH	106
8.10.3.	AVERAGE POWER	107
8.10.4.	OUTPUT POWER AND PSD	108
8.11.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 111</i>	
8.11.1.	26 dB BANDWIDTH.....	111
8.11.2.	99% BANDWIDTH	113
8.11.3.	AVERAGE POWER	115
8.11.4.	OUTPUT POWER AND PSD	116
8.12.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 120</i>	
8.13.	<i>802.11n HT20 ANTENNA A MODE IN THE 5.3 GHz BAND</i>	<i>121</i>
8.13.1.	26 dB BANDWIDTH.....	121
8.13.2.	99% BANDWIDTH	124
8.13.3.	AVERAGE POWER	127
8.13.4.	OUTPUT POWER AND PSD	128
8.14.	<i>802.11n HT20 ANTENNA B MODE IN THE 5.3 GHz BAND</i>	<i>132</i>
8.14.1.	26 dB BANDWIDTH.....	132
8.14.2.	99% BANDWIDTH	135
8.14.3.	AVERAGE POWER	138
8.14.4.	OUTPUT POWER AND PSD	139
8.15.	<i>802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND .</i>	<i>143</i>
8.15.1.	26 dB BANDWIDTH.....	143
8.15.2.	99% BANDWIDTH	147
8.15.3.	AVERAGE POWER	151
8.15.4.	OUTPUT POWER AND PSD	152
8.16.	<i>802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND</i>	<i>157</i>

8.16.1.	26 dB BANDWIDTH	157
8.16.2.	99% BANDWIDTH	161
8.16.3.	AVERAGE POWER	165
8.16.4.	OUTPUT POWER AND PSD	166
8.17.	<i>802.11n HT40 ANTENNA A MODE IN THE 5.3 GHz BAND</i>	<i>171</i>
8.17.1.	26 dB BANDWIDTH	171
8.17.2.	99% BANDWIDTH	173
8.17.3.	AVERAGE POWER	175
8.17.4.	OUTPUT POWER AND PSD	176
8.18.	<i>802.11n HT40 ANTENNA B MODE IN THE 5.3 GHz BAND</i>	<i>179</i>
8.18.1.	26 dB BANDWIDTH	179
8.18.2.	99% BANDWIDTH	181
8.18.3.	AVERAGE POWER	183
8.18.4.	OUTPUT POWER AND PSD	184
8.19.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND ..</i>	<i>187</i>
8.19.1.	26 dB BANDWIDTH	187
8.19.2.	99% BANDWIDTH	190
8.19.3.	AVERAGE POWER	193
8.19.4.	OUTPUT POWER AND PSD	194
8.20.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND</i>	<i>198</i>
8.21.	<i>802.11ac VHT80 ANTENNA A MODE IN THE 5.3 GHz BAND</i>	<i>199</i>
8.21.1.	26 dB BANDWIDTH	199
8.21.2.	99% BANDWIDTH	200
8.21.3.	AVERAGE POWER	201
8.21.4.	OUTPUT POWER AND PSD	202
8.22.	<i>802.11ac VHT80 ANTENNA B MODE IN THE 5.3 GHz BAND</i>	<i>205</i>
8.22.1.	26 dB BANDWIDTH	205
8.22.2.	99% BANDWIDTH	206
8.22.3.	AVERAGE POWER	207
8.22.4.	OUTPUT POWER AND PSD	208
8.23.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND</i> <i>211</i>	
8.23.1.	26 dB BANDWIDTH	211
8.23.2.	99% BANDWIDTH	213
8.23.3.	AVERAGE POWER	215
8.23.4.	OUTPUT POWER AND PSD	216
8.24.	<i>802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND</i> <i>219</i>	
8.25.	<i>802.11n HT20 ANTENNA A MODE IN THE 5.6 GHz BAND</i>	<i>220</i>
8.25.1.	26 dB BANDWIDTH	220
8.25.2.	99% BANDWIDTH	223
8.25.3.	AVERAGE POWER	226
8.25.4.	OUTPUT POWER AND PSD	227
8.26.	<i>802.11ac VHT20 ANTENNA A STRADDLE CHANNEL 144 RESULTS</i>	<i>231</i>
8.26.1.	OUTPUT POWER AND PSD	231
8.26.2.	6 dB BANDWIDTH	235
8.27.	<i>802.11n HT20 ANTENNA B MODE IN THE 5.6 GHz BAND</i>	<i>236</i>
8.27.1.	26 dB BANDWIDTH	236

8.27.2.	99% BANDWIDTH	239
8.27.3.	AVERAGE POWER	242
8.27.4.	OUTPUT POWER AND PSD	243
8.28.	<i>802.11ac VHT20 ANTENNA B STRADDLE CHANNEL 144 RESULTS</i>	247
8.28.1.	OUTPUT POWER AND PSD	247
8.28.2.	6 dB BANDWIDTH.....	251
8.29.	<i>802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND</i> .	252
8.29.1.	26 dB BANDWIDTH.....	252
8.29.2.	99% BANDWIDTH	257
8.29.3.	AVERAGE POWER	262
8.29.4.	OUTPUT POWER AND PSD	263
8.30.	<i>802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 144 RESULTS</i>	269
8.30.1.	OUTPUT POWER AND PSD	269
8.30.2.	6 dB BANDWIDTH.....	275
8.31.	<i>802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND</i> 277	
8.31.1.	26 dB BANDWIDTH.....	277
8.31.2.	99% BANDWIDTH	282
8.31.3.	AVERAGE POWER	287
8.31.4.	OUTPUT POWER AND PSD	288
8.32.	<i>802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) STBC STRADDLE CHANNEL 144 RESULTS</i>	294
8.32.1.	OUTPUT POWER AND PSD	294
8.32.2.	6 dB BANDWIDTH.....	300
8.33.	<i>802.11n HT40 ANTENNA A MODE IN THE 5.6 GHz BAND</i>	302
8.33.1.	26 dB BANDWIDTH.....	302
8.33.2.	99% BANDWIDTH	305
8.33.3.	AVERAGE POWER	308
8.33.4.	OUTPUT POWER AND PSD	309
8.34.	<i>802.11ac VHT40 ANTENNA A STRADDLE CH 142 RESULTS</i>	313
8.34.1.	OUTPUT POWER AND PSD	313
8.34.2.	6 dB BANDWIDTH.....	317
8.35.	<i>802.11n HT40 ANTENNA B MODE IN THE 5.6 GHz BAND</i>	318
8.35.1.	26 dB BANDWIDTH.....	318
8.35.2.	99% BANDWIDTH	321
8.35.3.	AVERAGE POWER	324
8.35.4.	OUTPUT POWER AND PSD	325
8.36.	<i>802.11ac VHT40 ANTENNA B STRADDLE CH 142 RESULTS</i>	329
8.36.1.	OUTPUT POWER AND PSD	329
8.36.2.	6 dB BANDWIDTH.....	333
8.37.	<i>802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND</i> .	334
8.37.1.	26 dB BANDWIDTH.....	334
8.37.2.	99% BANDWIDTH	339
8.37.3.	AVERAGE POWER	344
8.37.4.	OUTPUT POWER AND PSD	345
8.38.	<i>802.11ac VHT40 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 142 RESULTS</i>	351
8.38.1.	OUTPUT POWER AND PSD	351

8.38.2.	6 dB BBANDWIDTH	357
8.39.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND	359
8.40.	802.11ac VHT80 ANTENNA A MODE IN THE 5.6 GHz BAND	360
8.40.1.	26 dB BANDWIDTH	360
8.40.2.	99% BANDWIDTH	363
8.40.3.	AVERAGE POWER	366
8.40.4.	OUTPUT POWER AND PSD	367
8.41.	802.11ac VHT80 ANTENNA A STRADDLE CHANNEL 138 RESULTS	370
8.41.1.	OUTPUT POWER AND PSD	370
8.41.2.	6 dB BANDWIDTH	374
8.42.	802.11ac VHT80 ANTENNA B MODE IN THE 5.6 GHz BAND	375
8.42.1.	26 dB BANDWIDTH	375
8.42.2.	99% BANDWIDTH	378
8.42.3.	AVERAGE POWER	381
8.42.4.	OUTPUT POWER AND PSD	382
8.43.	802.11ac VHT80 ANTENNA B STRADDLE CHANNEL 138 RESULTS	385
8.43.1.	OUTPUT POWER AND PSD	385
8.43.2.	6 dB BANDWIDTH	389
8.44.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND 390	
8.44.1.	26 dB BANDWIDTH	390
8.44.2.	99% BANDWIDTH	394
8.44.3.	AVERAGE POWER	398
8.44.4.	OUTPUT POWER AND PSD	399
8.45.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 138 RESULTS	404
8.45.1.	OUTPUT POWER AND PSD	404
8.45.2.	6 dB BANDWIDTH	410
8.46.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 412	
8.47.	802.11n HT20 ANTENNA A MODE IN THE 5.8 GHz BAND	413
8.47.1.	6 dB BANDWIDTH	413
8.47.2.	26 dB BANDWIDTH	416
8.47.3.	99% BANDWIDTH	419
8.47.4.	AVERAGE POWER	422
8.47.5.	OUTPUT POWER	423
8.47.6.	PSD	425
8.48.	802.11n HT20 ANTENNA B MODE IN THE 5.8 GHz BAND	428
8.48.1.	6 dB BANDWIDTH	428
8.48.2.	26 dB BANDWIDTH	431
8.48.3.	99% BANDWIDTH	434
8.48.4.	AVERAGE POWER	437
8.48.5.	OUTPUT POWER	438
8.48.6.	PSD	440
8.49.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND .	443
8.49.1.	6 dB BANDWIDTH	443
8.49.2.	26 dB BANDWIDTH	447
8.49.3.	99% BANDWIDTH	451

8.49.4.	AVERAGE POWER	455
8.49.5.	OUTPUT POWER.....	456
8.49.6.	PSD	458
8.50.	802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND	463
8.51.	802.11n HT40 ANTENNA A MODE IN THE 5.8 GHz BAND	464
8.51.1.	6 dB BANDWIDTH.....	464
8.51.2.	26 dB BANDWIDTH.....	466
8.51.3.	99% BANDWIDTH	468
8.51.4.	AVERAGE POWER	470
8.51.5.	OUTPUT POWER.....	471
8.51.6.	PSD	473
8.52.	802.11n HT40 ANTENNA B MODE IN THE 5.8 GHz BAND	476
8.52.1.	6 dB BANDWIDTH.....	476
8.52.2.	26 dB BANDWIDTH.....	478
8.52.3.	99% BANDWIDTH	480
8.52.4.	AVERAGE POWER	482
8.52.5.	OUTPUT POWER.....	483
8.52.6.	PSD	485
8.53.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND .	488
8.53.1.	6 dB BANDWIDTH.....	488
8.53.2.	26 dB BANDWIDTH.....	491
8.53.3.	99% BANDWIDTH	494
8.53.4.	AVERAGE POWER	497
8.53.5.	OUTPUT POWER.....	498
8.53.6.	PSD	500
8.54.	802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND	504
8.55.	802.11ac VHT80 ANTENNA A MODE IN THE 5.8 GHz BAND	505
8.55.1.	6 dB BANDWIDTH.....	505
8.55.2.	26 dB BANDWIDTH.....	506
8.55.3.	99% BANDWIDTH	507
8.55.4.	AVERAGE POWER	508
8.55.5.	OUTPUT POWER.....	509
8.55.6.	PSD	511
8.56.	802.11ac VHT80 ANTENNA B MODE IN THE 5.8 GHz BAND	513
8.56.1.	6 dB BANDWIDTH.....	513
8.56.2.	26 dB BANDWIDTH.....	514
8.56.3.	99% BANDWIDTH	515
8.56.4.	AVERAGE POWER	516
8.56.5.	OUTPUT POWER.....	517
8.56.6.	PSD	519
8.57.	802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND	521
8.57.1.	6 dB BANDWIDTH.....	521
8.57.2.	26 dB BANDWIDTH.....	523
8.57.3.	99% BANDWIDTH	525
8.57.4.	AVERAGE POWER	527
8.57.5.	OUTPUT POWER.....	528
8.57.6.	PSD	530

8.58. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND
533

9. RADIATED RESULTS	534
9.1. LIMITS AND PROCEDURE.....	534
9.1.1. 11n HT20 ANTENNA A SISO MODE IN THE 5.2GHz BAND	535
9.1.2. 11n HT20 ANTENNA B SISO MODE IN THE 5.2GHz BAND	543
9.1.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	551
9.1.4. 11n HT40 ANTENNA A SISO MODE IN THE 5.2GHz BAND	559
9.1.5. 11n HT40 ANTENNA B SISO MODE IN THE 5.2GHz BAND	565
9.1.6. 11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND	571
9.1.7. 11ac HT80 ANTENNA A SISO MODE IN THE 5.2GHz BAND	577
9.1.8. 11ac HT80 ANTENNA B SISO MODE IN THE 5.2GHz BAND	581
9.1.9. 11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND	585
9.1.10. 11n HT20 ANTENNA A SISO MODE IN THE 5.3GHz BAND.....	589
9.1.11. 11n HT20 ANTENNA B SISO MODE IN THE 5.3GHz BAND.....	597
9.1.12. 11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND	605
9.1.13. 11n HT40 ANTENNA A SISO MODE IN THE 5.3GHz BAND.....	613
9.1.14. 11n HT40 ANTENNA B SISO MODE IN THE 5.3GHz BAND.....	619
9.1.15. 11ac HT80 ANTENNA A SISO MODE IN THE 5.3GHz BAND	631
9.1.16. 11ac HT80 ANTENNA B SISO MODE IN THE 5.3GHz BAND	635
9.1.17. 11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND	639
9.1.18. 11n HT20 ANTENNA A SISO MODE IN THE 5.6GHz BAND.....	643
9.1.19. 11ac HT20 ANTENNA A SISO STRADDLE CHANNEL 144	653
9.1.20. 11n HT20 ANTENNA B SISO MODE IN THE 5.6GHz BAND.....	655
9.1.21. 11ac HT20 ANTENNA B SISO STRADDLE CHANNEL 144	665
9.1.22. 11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND	667
9.1.23. 11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144	677
9.1.24. 11n HT40 ANTENNA A SISO MODE IN THE 5.6GHz BAND.....	679
9.1.25. 11n HT40 ANTENNA A SISO STRADDLE CHANNEL 142.....	689
9.1.26. 11n HT40 ANTENNA B SISO MODE IN THE 5.6GHz BAND.....	691
9.1.27. 11n HT40 ANTENNA B SISO STRADDLE CHANNEL 142	701
9.1.28. 11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND	703
9.1.29. 11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142	713
9.1.30. 11ac HT80 ANTENNA A SISO MODE IN THE 5.6GHz BAND.....	715
9.1.31. 11ac HT80 ANTENNA A SISO STRADDLE CHANNEL 138	721
9.1.32. 11ac HT80 ANTENNA B SISO MODE IN THE 5.6GHz BAND	723
9.1.33. 11ac HT80 ANTENNA B SISO STRADDLE CHANNEL 138	729
9.1.34. 11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND	731
9.1.35. 11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138	737
9.1.36. 11n HT20 ANTENNA A SISO MODE IN THE 5.8GHz BAND.....	739
9.1.37. 11n HT20 ANTENNA B SISO MODE IN THE 5.8GHz BAND.....	749
9.1.38. 11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND	759
9.1.39. 11n HT40 ANTENNA A SISO MODE IN THE 5.8GHz BAND.....	769
9.1.40. 11n HT40 ANTENNA B SISO MODE IN THE 5.8GHz BAND.....	777
9.1.41. 11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND	785
9.1.42. 11ac HT80 ANTENNA A SISO MODE IN THE 5.8GHz BAND	793
9.1.43. 11ac HT80 ANTENNA B SISO MODE IN THE 5.8GHz BAND	799
9.1.44. 11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND	805
9.2. RADIATION CO-LOCATION	811
9.2.1. BLUETOOTH & 802.11 HT20 2Tx CDD MODE IN THE 5.3GHz BAND	811

9.2.2.	BLUETOOTH LOW ENERGY & 802.11 HT20 2Tx CDD MODE IN THE 5.3GHz BAND	813
9.3.	WORST-CASE BELOW 1 GHz	815
9.4.	WORST-CASE 18 to 26 GHz	817
9.5.	WORST-CASE 26 to 40 GHz	819
10.	AC POWER LINE CONDUCTED EMISSIONS	821
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	822
10.2.	EUT POWERED BY HOST PC VIA USB CABLE	824
11.	DYNAMIC FREQUENCY SELECTION	826
11.1.	OVERVIEW	826
11.1.1.	LIMITS	826
11.1.2.	TEST AND MEASUREMENT SYSTEM	830
11.1.3.	TEST AND MEASUREMENT SOFTWARE	832
11.1.4.	SETUP OF EUT (CLIENT MODE)	833
11.1.5.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	834
11.1.6.	DESCRIPTION OF EUT	835
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	837
11.2.1.	TEST CHANNEL	837
11.2.2.	RADAR WAVEFORM AND TRAFFIC	837
11.2.3.	OVERLAPPING CHANNEL TESTS	840
11.2.4.	MOVE AND CLOSING TIME	840
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	844
11.3.1.	TEST CHANNEL	844
11.3.2.	RADAR WAVEFORM AND TRAFFIC	844
11.3.3.	OVERLAPPING CHANNEL TESTS	847
11.3.4.	MOVE AND CLOSING TIME	847
11.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH	851
11.4.1.	TEST CHANNEL	851
11.4.2.	RADAR WAVEFORM AND TRAFFIC	851
11.4.3.	OVERLAPPING CHANNEL TESTS	854
11.4.4.	MOVE AND CLOSING TIME	854
11.4.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	858
11.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH	859
11.5.1.	TEST CHANNEL	859
11.5.2.	RADAR WAVEFORM AND TRAFFIC	859
11.5.3.	OVERLAPPING CHANNEL TESTS	862
11.5.4.	MOVE AND CLOSING TIME	862
11.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH	866
11.6.1.	TEST CHANNEL	866
11.6.2.	RADAR WAVEFORM AND TRAFFIC	866
11.6.3.	OVERLAPPING CHANNEL TESTS	869
11.6.4.	MOVE AND CLOSING TIME	869

11.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH	
	873	
11.7.1.	TEST CHANNEL.....	873
11.7.2.	RADAR WAVEFORM AND TRAFFIC	873
11.7.3.	OVERLAPPING CHANNEL TESTS	876
11.7.4.	MOVE AND CLOSING TIME	876
11.7.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	880
12.	SETUP PHOTOS.....	881

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1822

SERIAL NUMBER: CONDUCTED (F9FSQ02CHQNX), RADIATED (F9FSJ00HHN9P),
DFS (F9FSQ01LHQNX)

DATE TESTED: NOVEMBER 08, 2016 TO JANUARY 23, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



JOE VANG
EMC WISE ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02/ D07 v02, FCC KDB 789033 D02 v01r03, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:2324B-4)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:2324B-5)
☐ Chamber C (IC:2324B-3)	☒ Chamber F (IC:2324B-6)
	☒ Chamber G (IC:2324B-7)
	☐ Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.49	44.57
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.42	87.50
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	16.40	43.65
	802.11n HT40 2TX CDD	19.47	88.51
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	13.98	25.00
	802.11ac VHT80 2TX CDD	15.72	37.33
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.93	49.32
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.47	88.51
	802.11n HT20 2TX STBC	19.96	99.08
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5270 - 5310	802.11n HT40 SISO	16.94	49.43
	802.11n HT40 2TX CDD	19.94	98.63
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	12.97	19.82
	802.11ac VHT80 2TX CDD	14.99	31.55
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	16.97	49.77
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	15.53	35.73
5500 - 5700	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11n HT20 2TX CDD	18.49	70.63
5720	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	17.08	51.05
5500 - 5700	802.11n HT20 2TX STBC	19.73	93.97
5720	802.11ac VHT20 2TX STBC (based on UNII-2C band output power)	18.37	68.66
5500 - 5700	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5500 - 5700	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5720	802.11ac VHT20 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX STBC	
5510 - 5670	802.11n HT40 SISO	16.81	47.97
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	16.58	45.50
5510 - 5670	802.11n HT40 2TX CDD	19.68	92.90
5710	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	19.11	81.47
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX STBC (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5530-5610	802.11ac VHT80 SISO	16.89	48.87
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	16.89	48.87
5530-5610	802.11ac VHT80 2TX CDD	19.69	93.11
5690	802.11ac VHT80 2TX CDD (based on UNII-2C band output power)	19.59	90.99
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX STBC(based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	
5530-5610	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX SDM (based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.46	44.26
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.48	88.72
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5755 - 5795	802.11n HT40 SISO	16.47	44.36
	802.11n HT40 2TX CDD	19.49	88.92
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2X CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2X CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2X CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2X CDD	
5775	802.11ac VHT80 SISO	16.44	44.06
	802.11ac VHT80 2TX CDD	17.97	62.66
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna A	Antenna B
5.2	1.27	2.64
5.3	2.24	2.77
5.5	3.39	3.17
5.8	3.54	3.21

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 18-40GHz and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either ANTENNA A, or ANTENNA B. All antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For 2TX MIMO modes, ANTENNA A/ANTENNA B, used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Antenna A	Y (Landscape)
		Antenna B	Y (Landscape)
	2TX MIMO	Antenna A + Antenna B	Y (Landscape)

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE and WLAN 5 GHz bands. Baseline testing was performed on various configurations to determine the worst case on radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	shielded	1	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

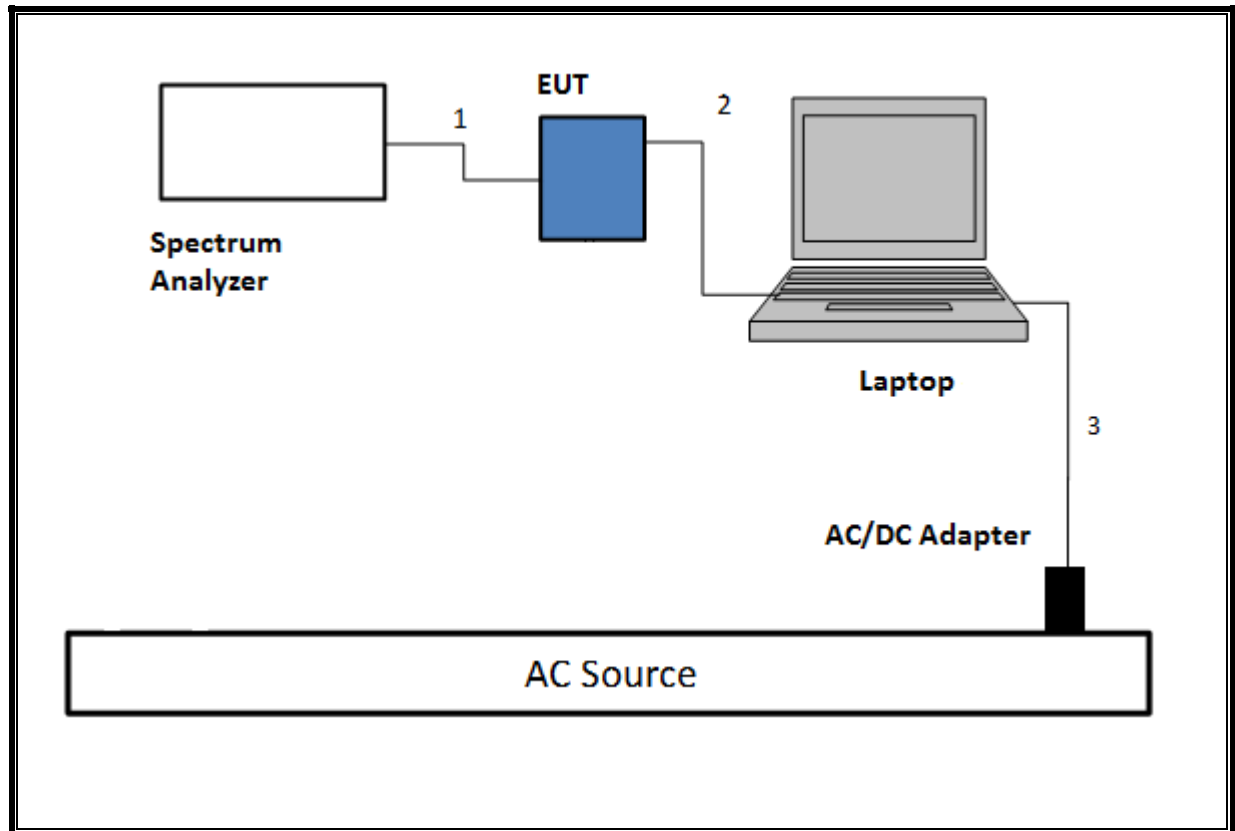

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

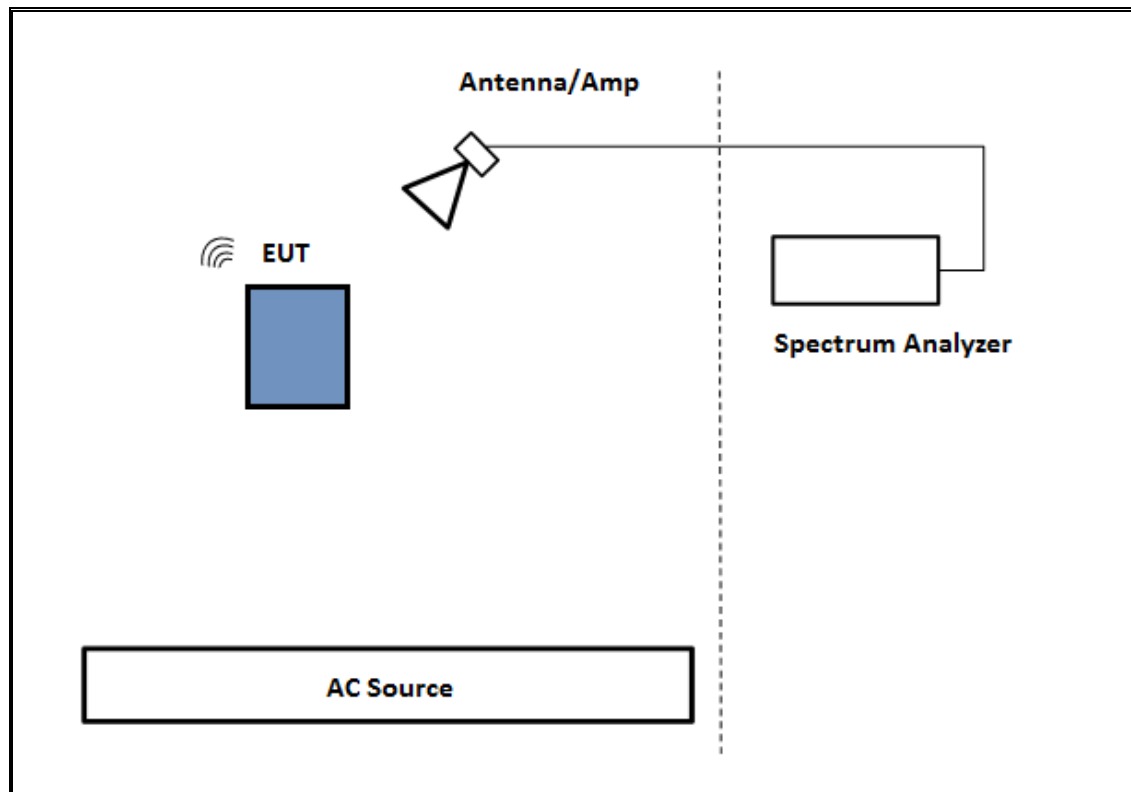

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.


SETUP DIAGRAM

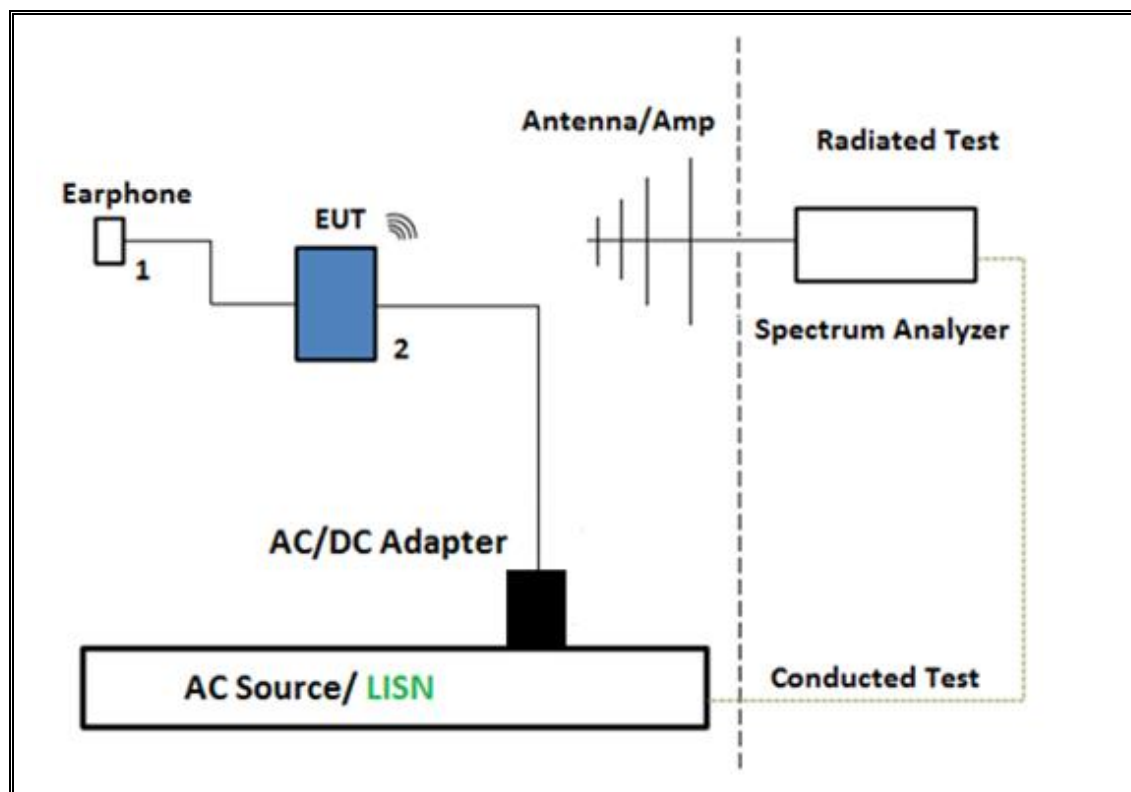

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

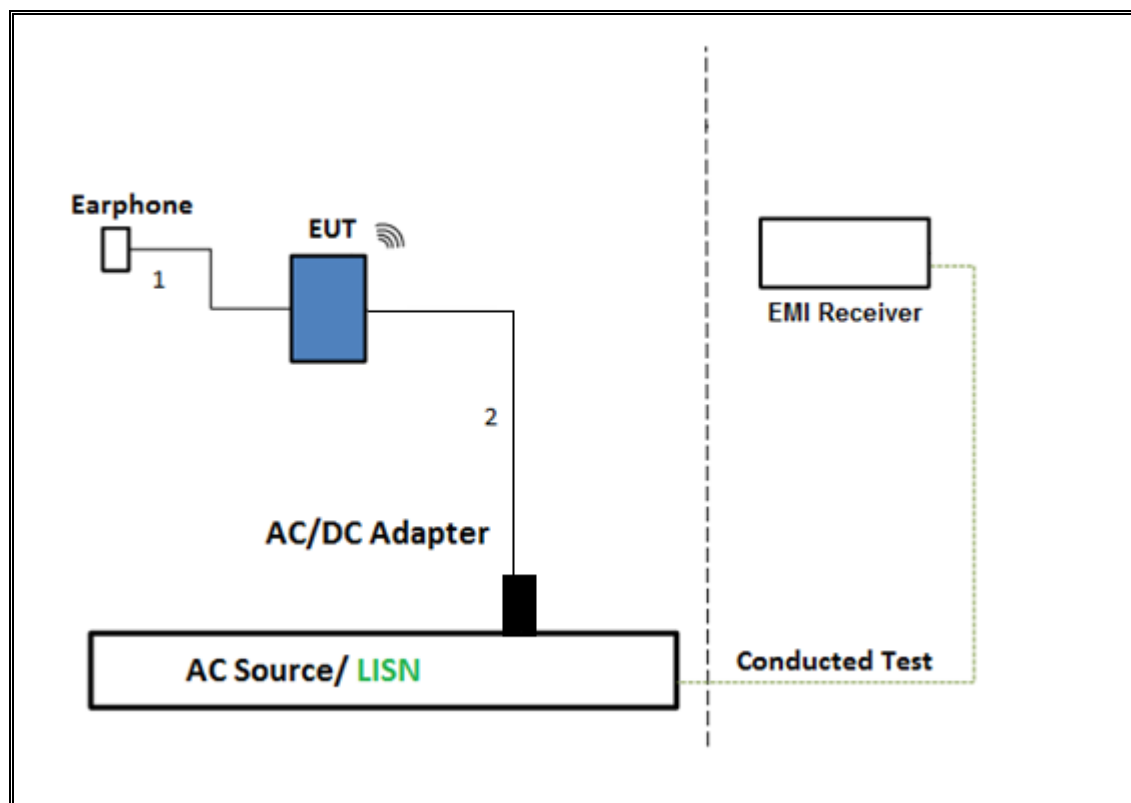

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

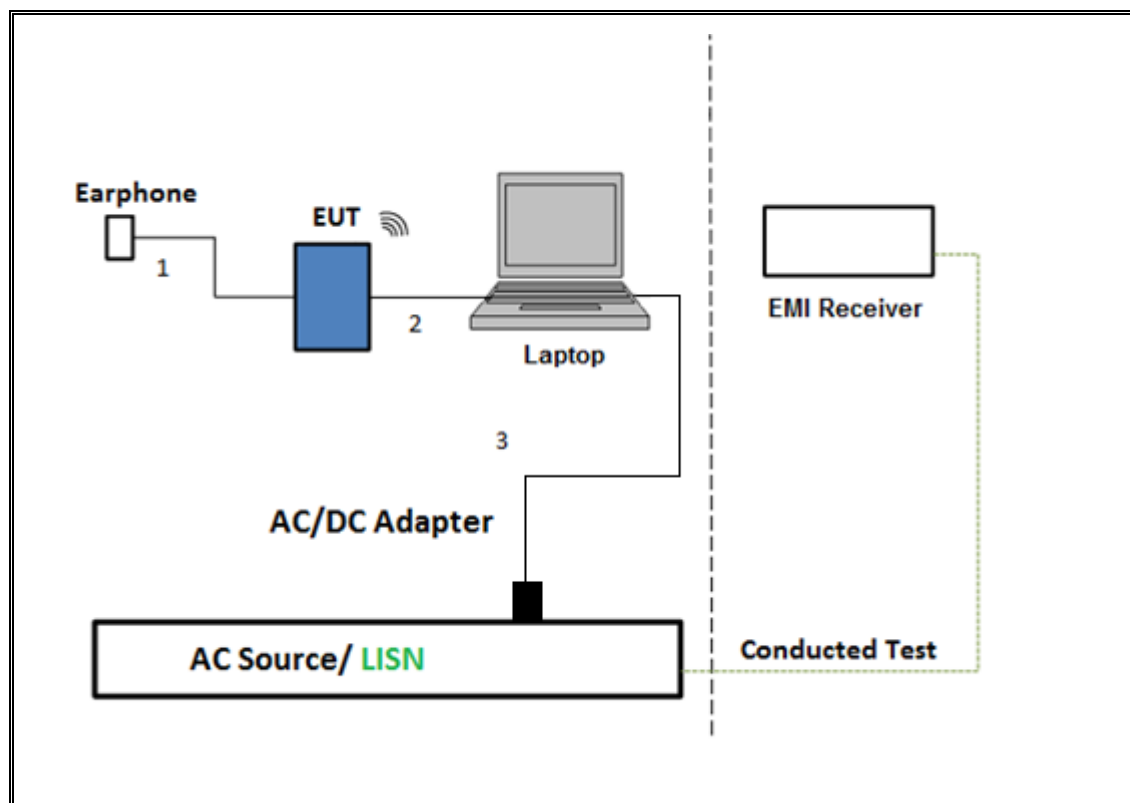

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Power Meter, P-series single channel	Agilent	N1911A	T227	10/11/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	06/20/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	04/04/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T740	11/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T286	05/04/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T905	06/21/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T346	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T408	11/10/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T1131	09/23/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T285	06/20/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	06/13/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1210	06/30/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	T446	05/25/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	04/07/2017
AC Line Conducted				
* EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS



None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD 2TX	1.920	1.943	0.988	98.82%	0.00	0.010
802.11n HT40 1TX	0.944	0.966	0.977	97.72%	0.10	1.059
802.11n HT40 CDD 2TX	0.944	0.966	0.977	97.72%	0.10	1.059
802.11ac VHT80 1TX	0.4600	0.4810	0.956	95.63%	0.19	2.174
802.11ac VHT80 CDD 2TX	0.4596	0.4812	0.955	95.51%	0.20	2.176

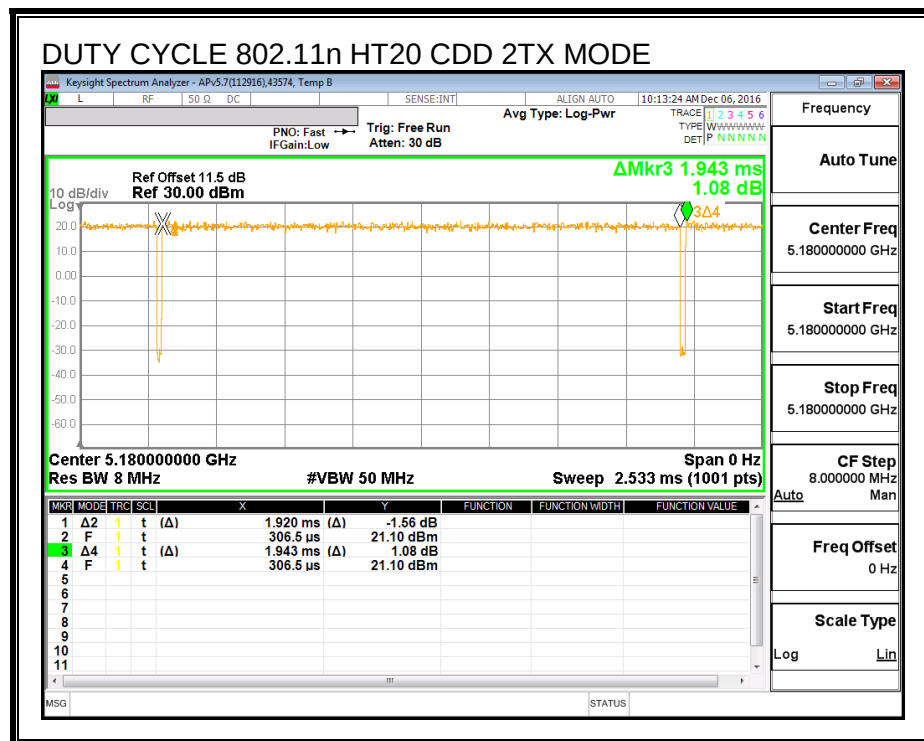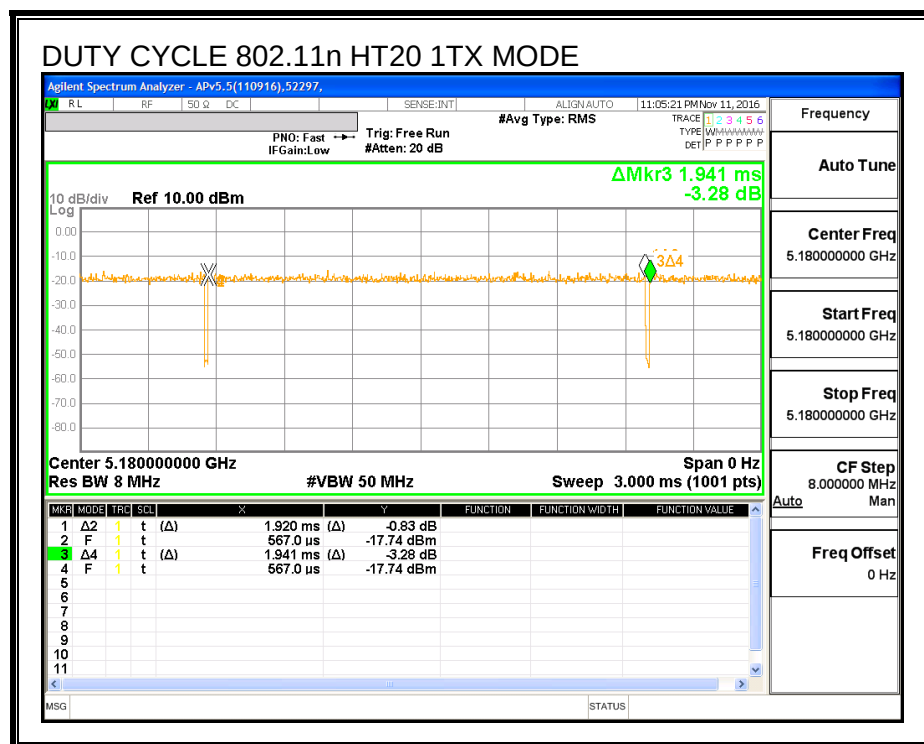

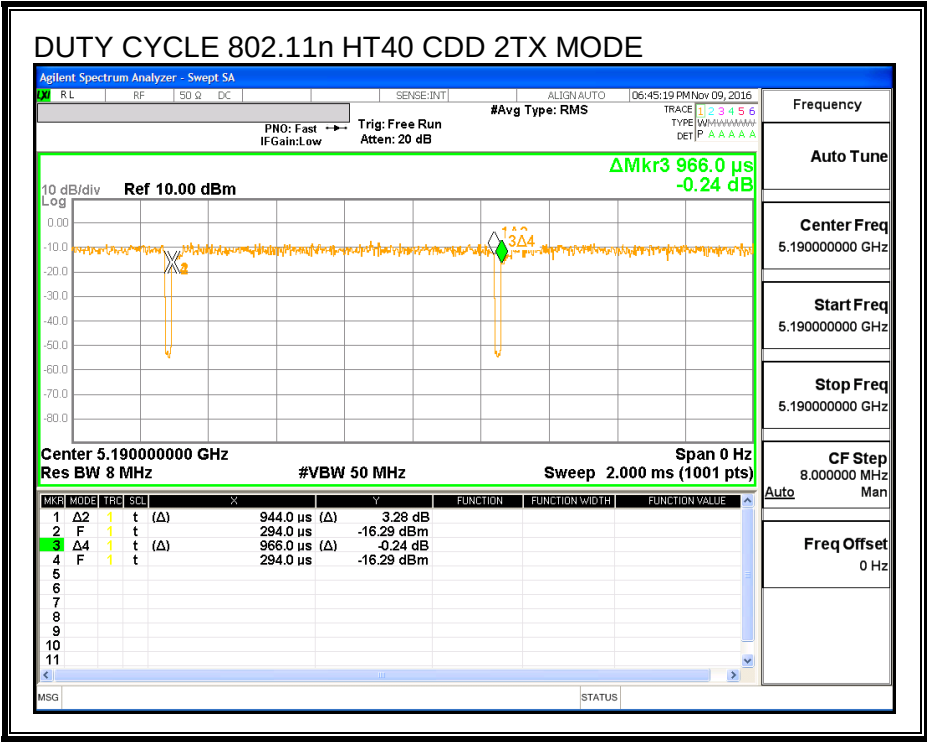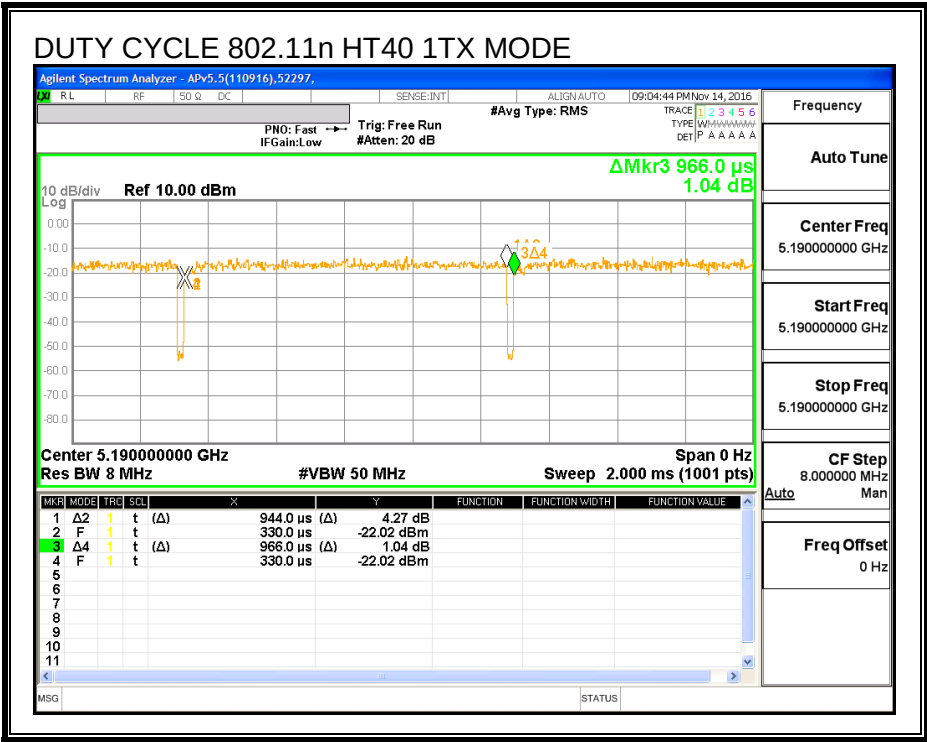

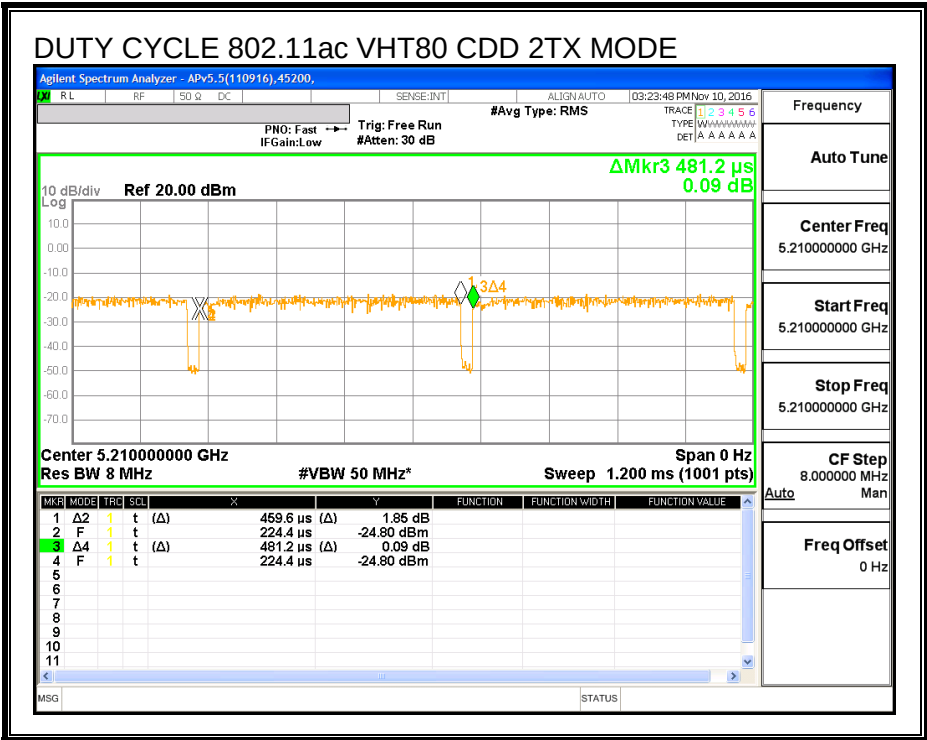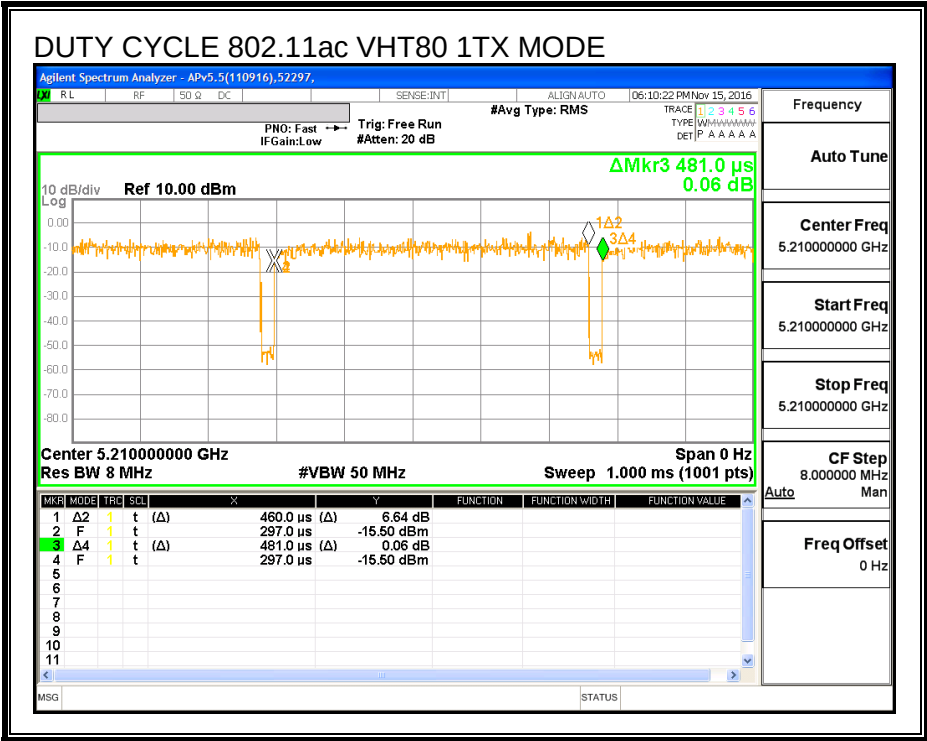

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r03, Section C.

26 dB Emission BW: KDB 789033 D02 v01r03, Section C.

99% Occupied BW: KDB 789033 D02 v01r03, Section D.

Conducted Output Power: KDB 789033 D02 v01r03, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r03, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.840
Mid	5200	22.000
High	5240	21.840

26 dB BANDWIDTH

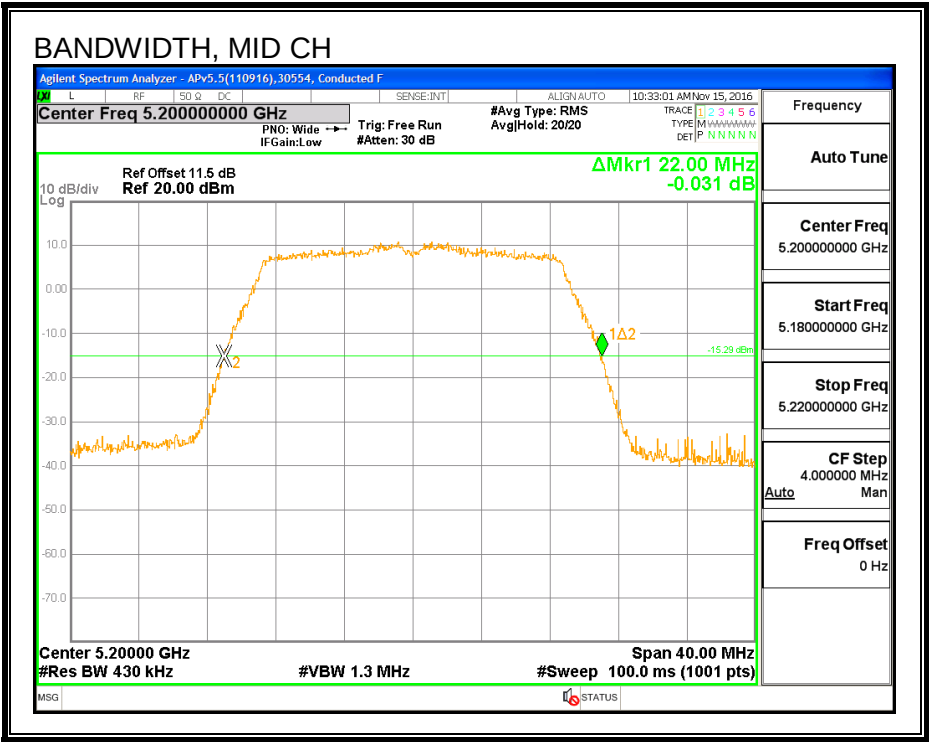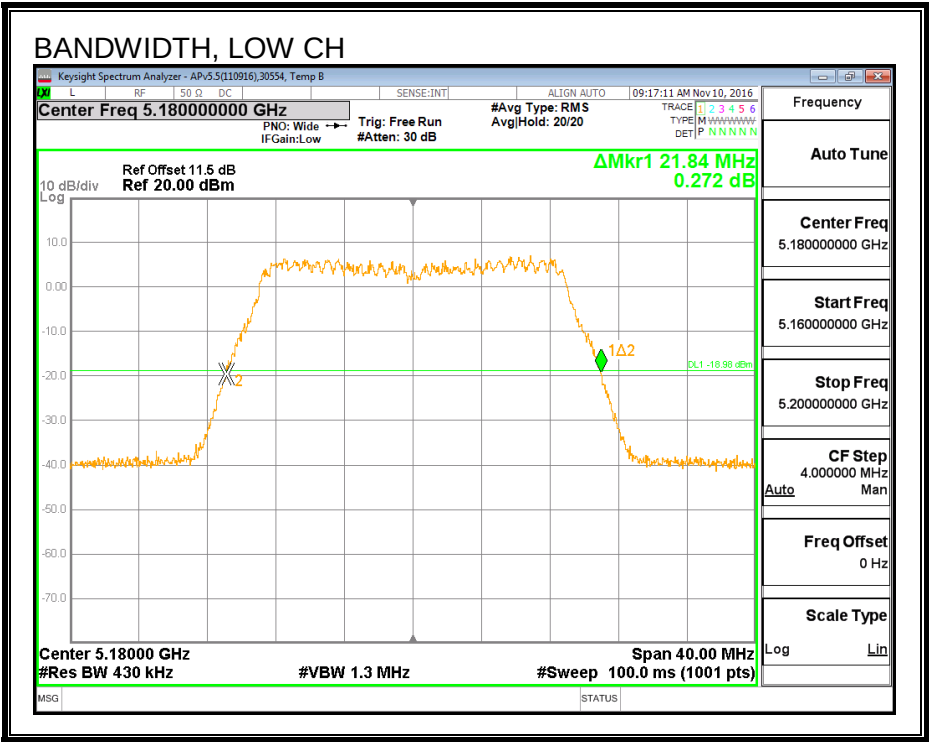

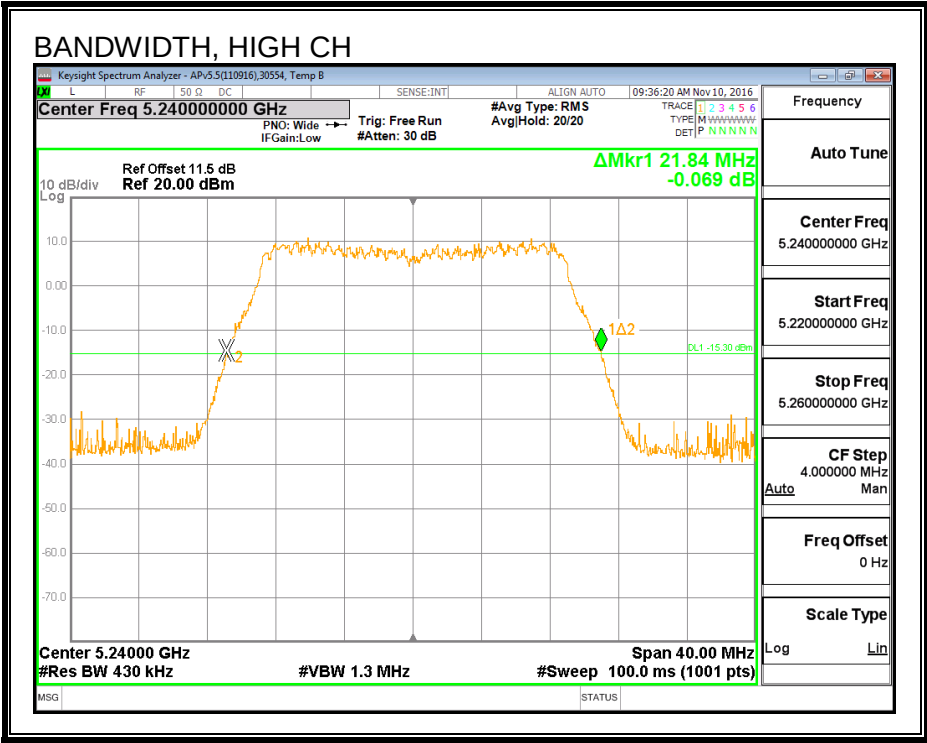

8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	18.045
Mid	5200	17.677
High	5240	17.842

99% BANDWIDTH

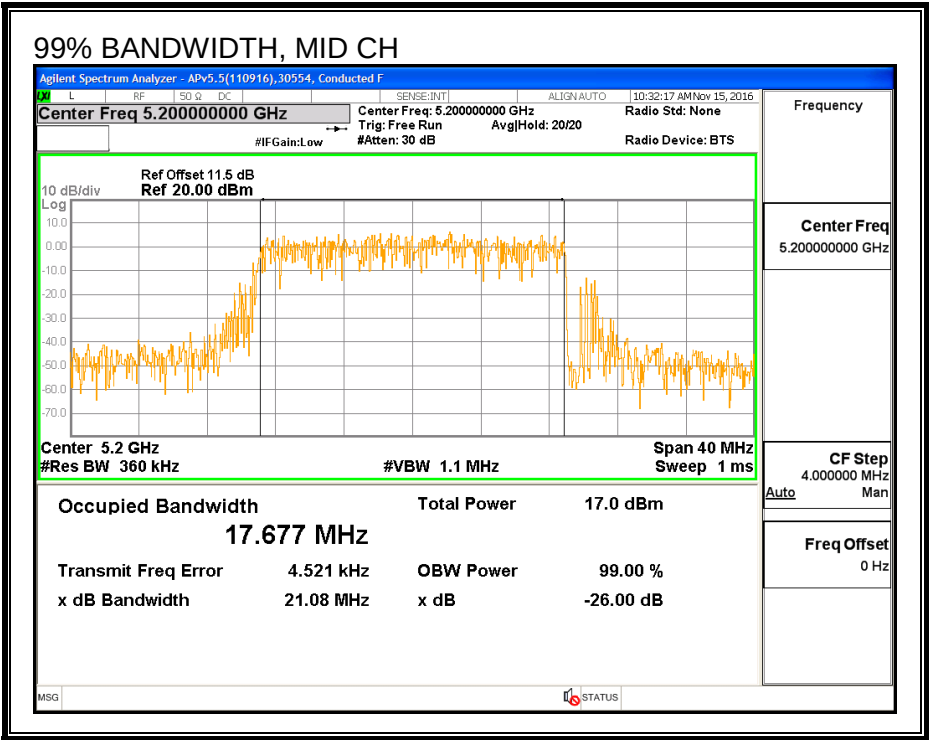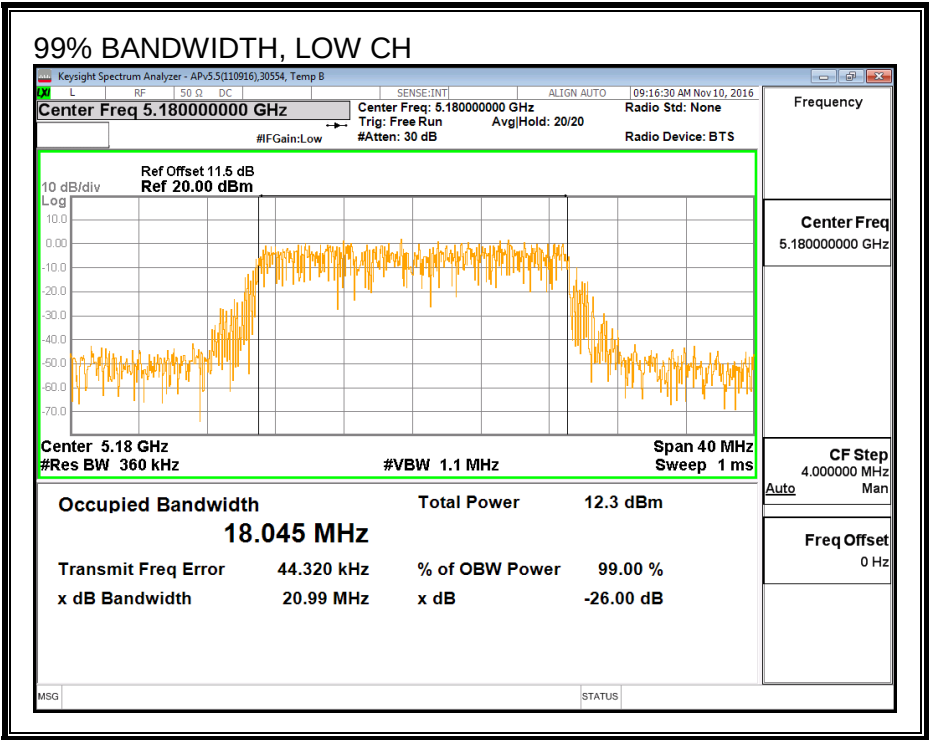

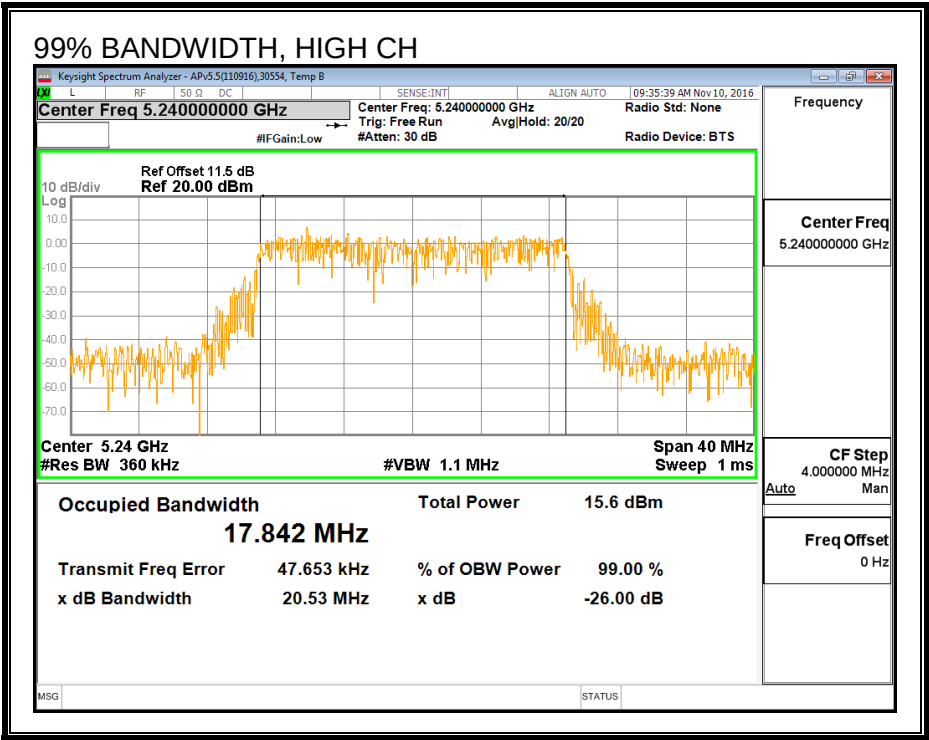

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.96
Mid	5200	16.45
High	5240	16.47

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.27	1.27	24.00	11.00
Mid	5200	1.27	1.27	24.00	11.00
High	5240	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.96	15.96	24.00	-8.04
Mid	5200	16.45	16.45	24.00	-7.55
High	5240	16.47	16.47	24.00	-7.53

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.01	6.01	11.00	-5.00
Mid	5200	5.98	5.98	11.00	-5.02
High	5240	5.88	5.88	11.00	-5.12

PSD

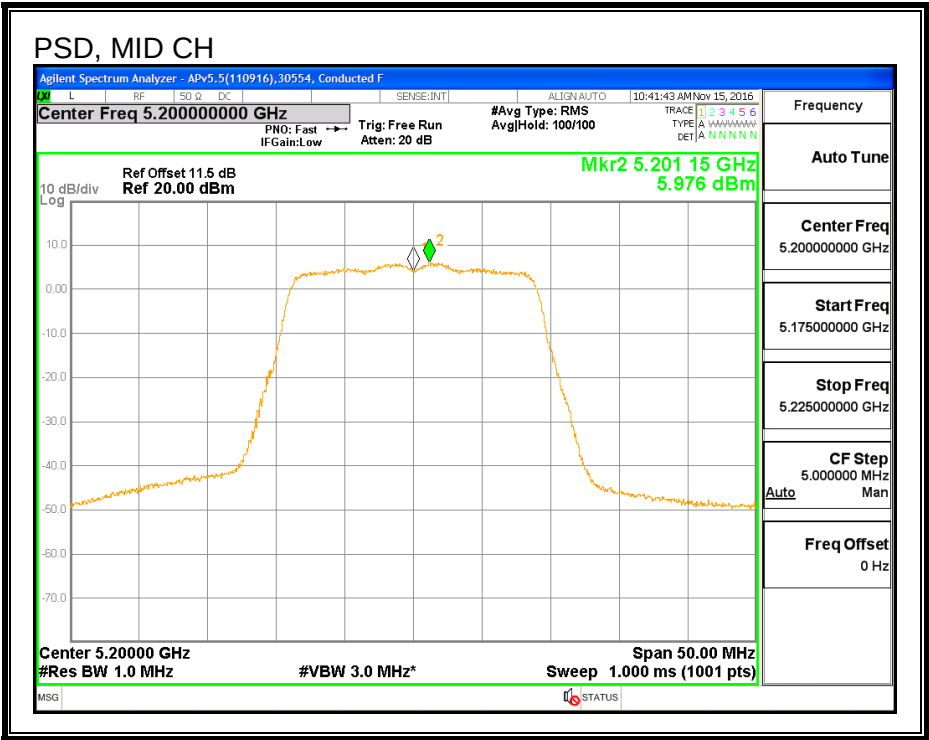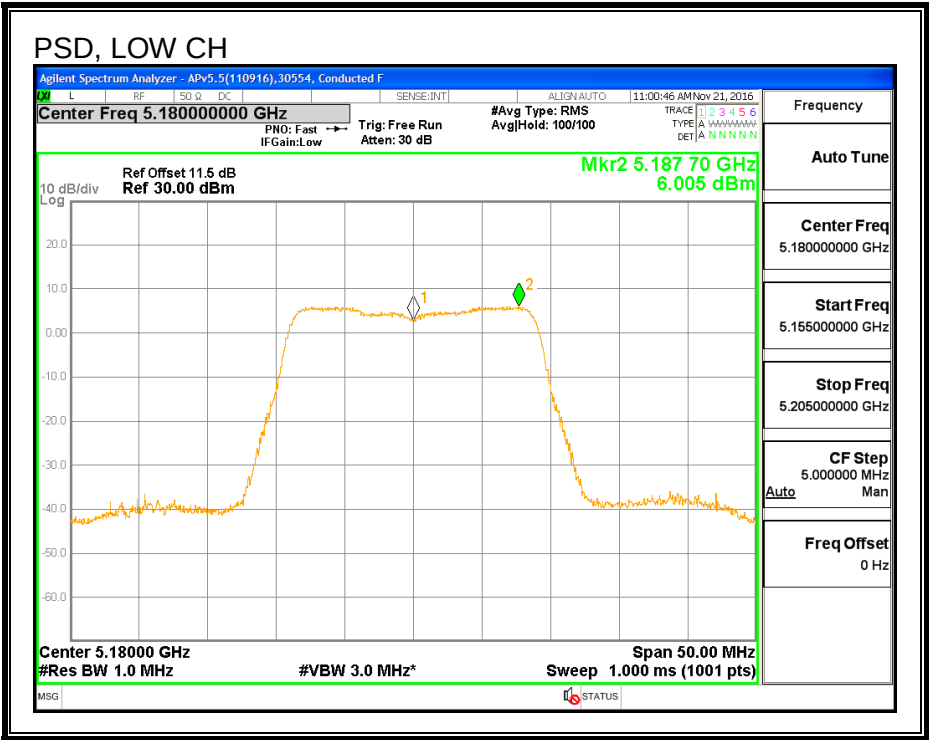

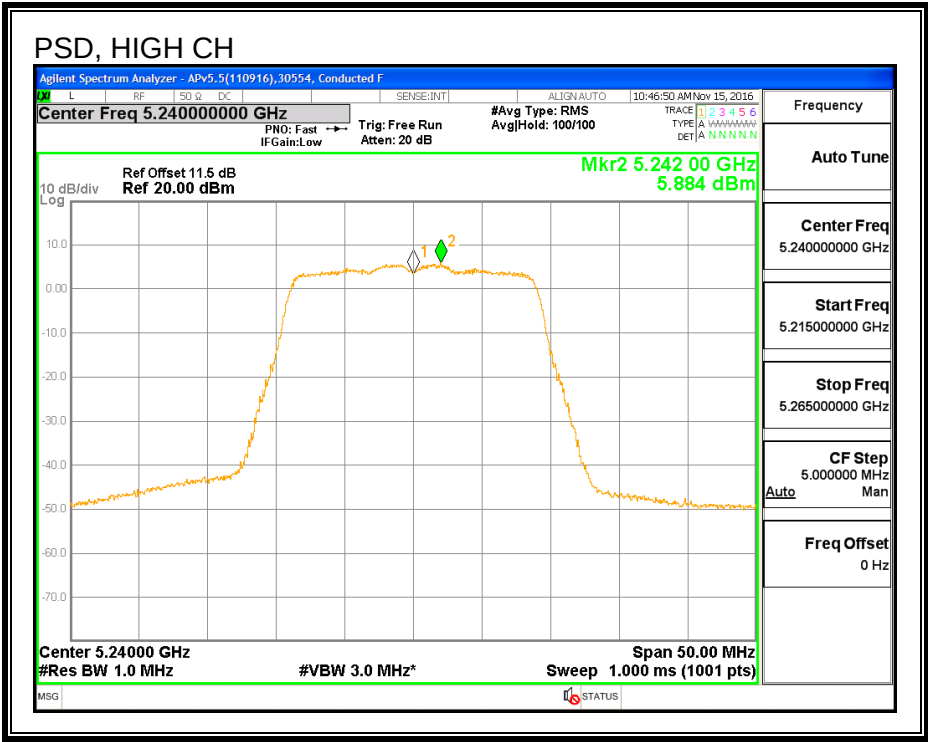

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.840
Mid	5200	21.840
High	5240	21.720

26 dB BANDWIDTH

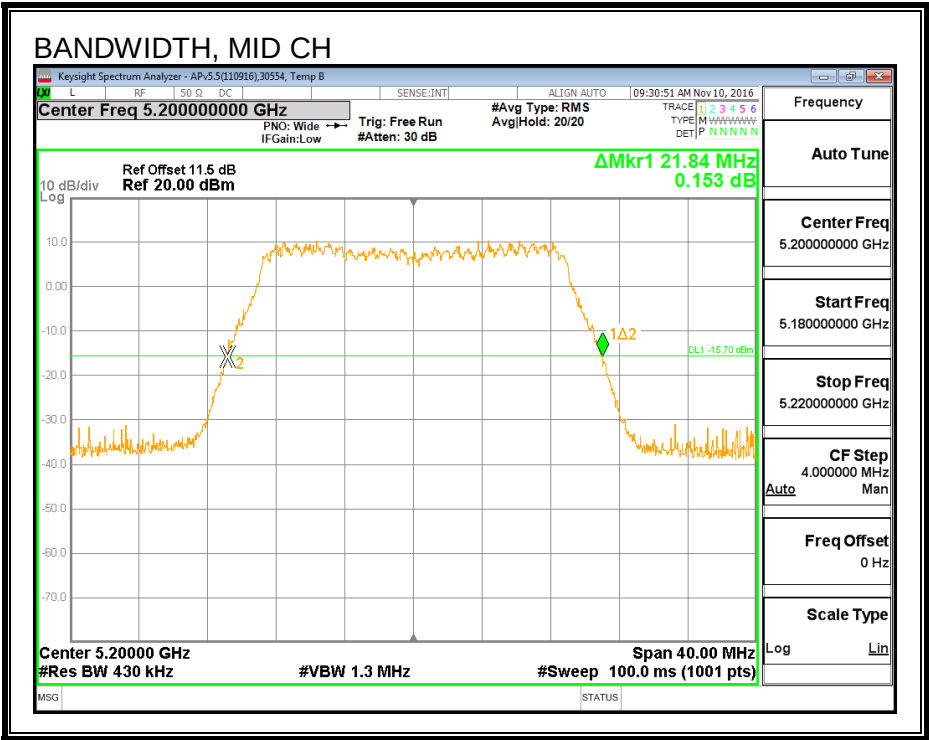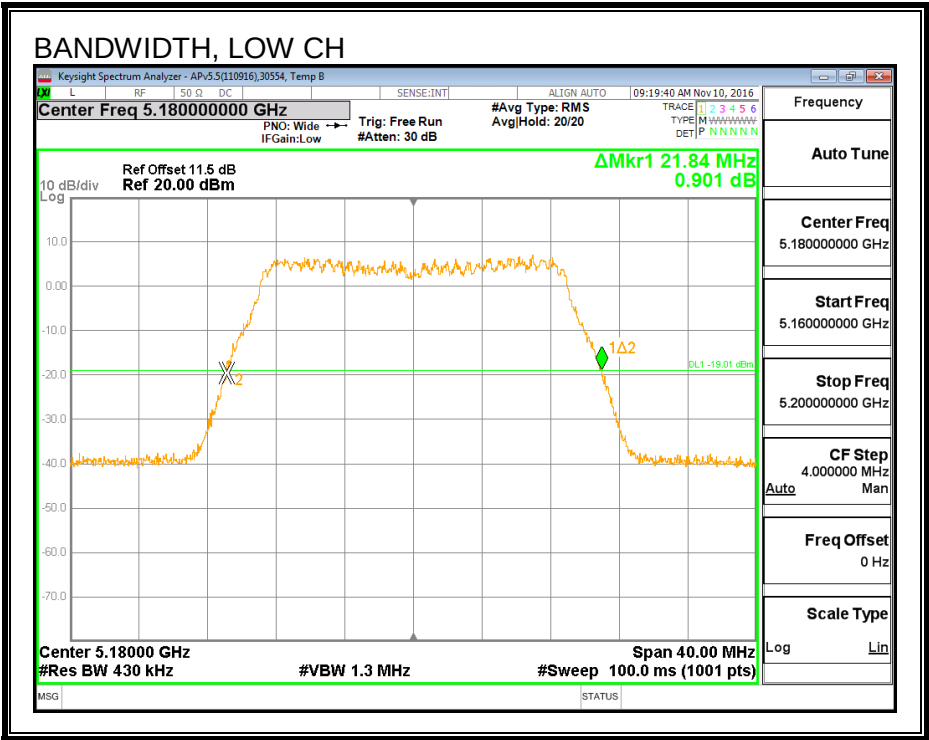

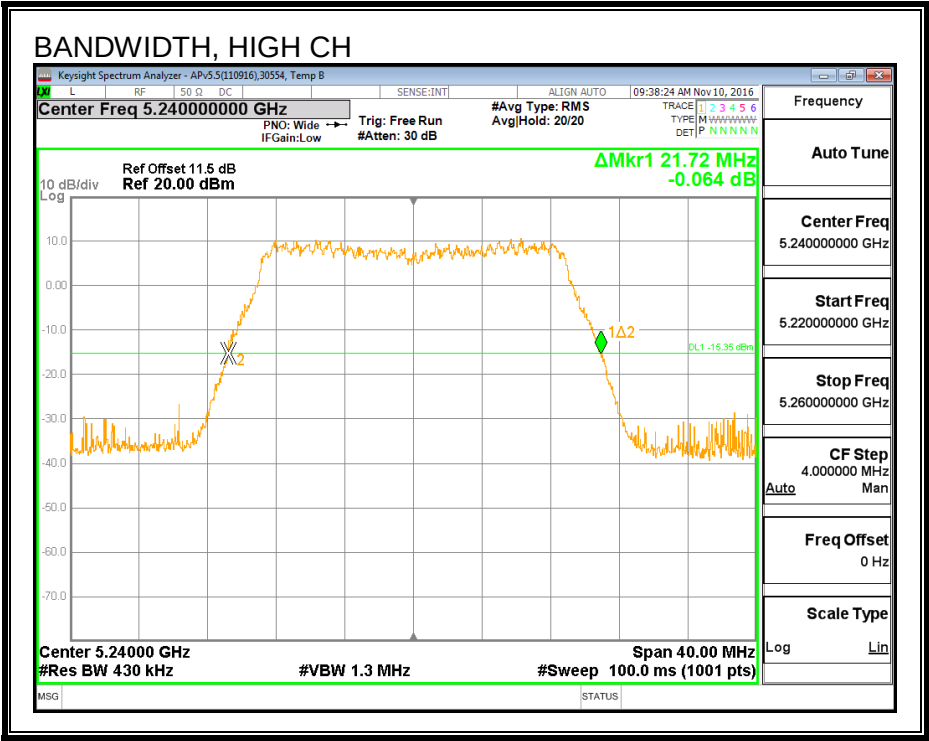

8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.873
Mid	5200	17.863
High	5240	17.808

99% BANDWIDTH

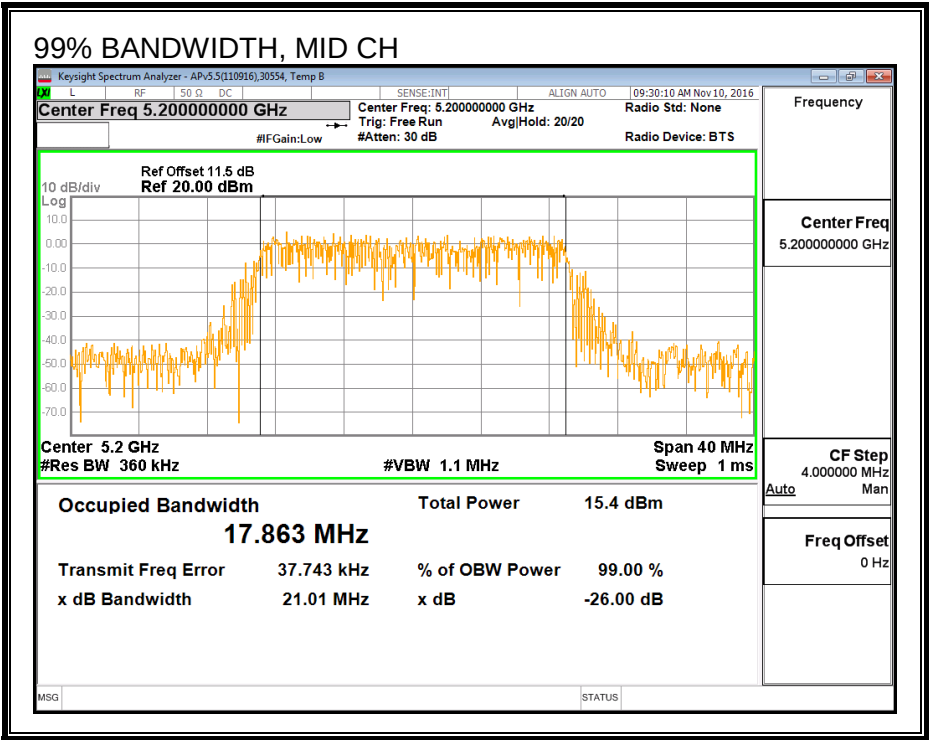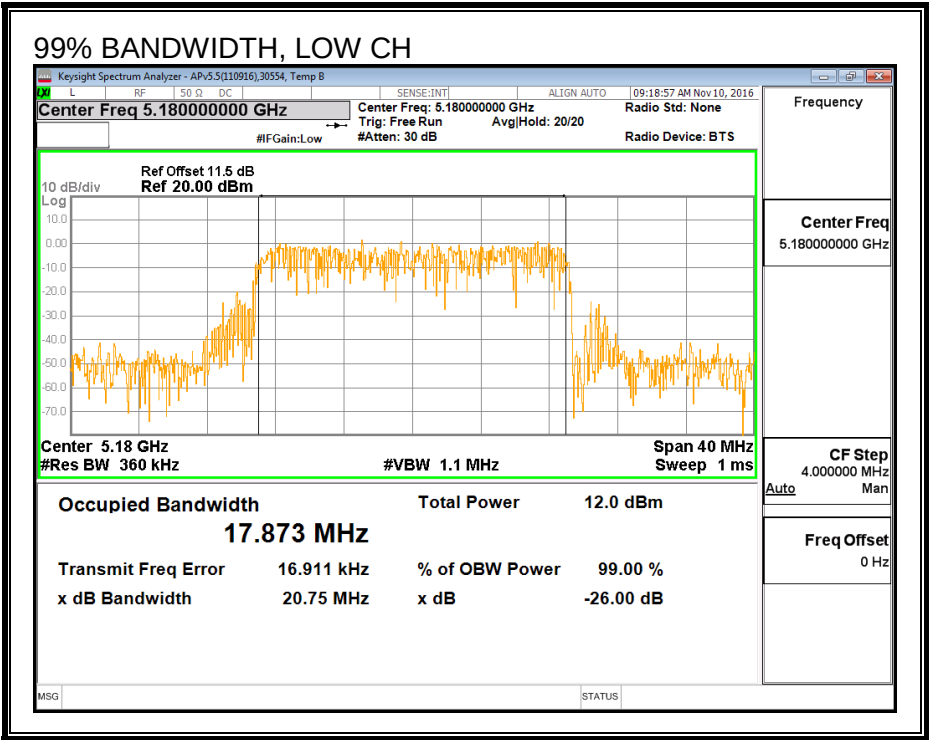

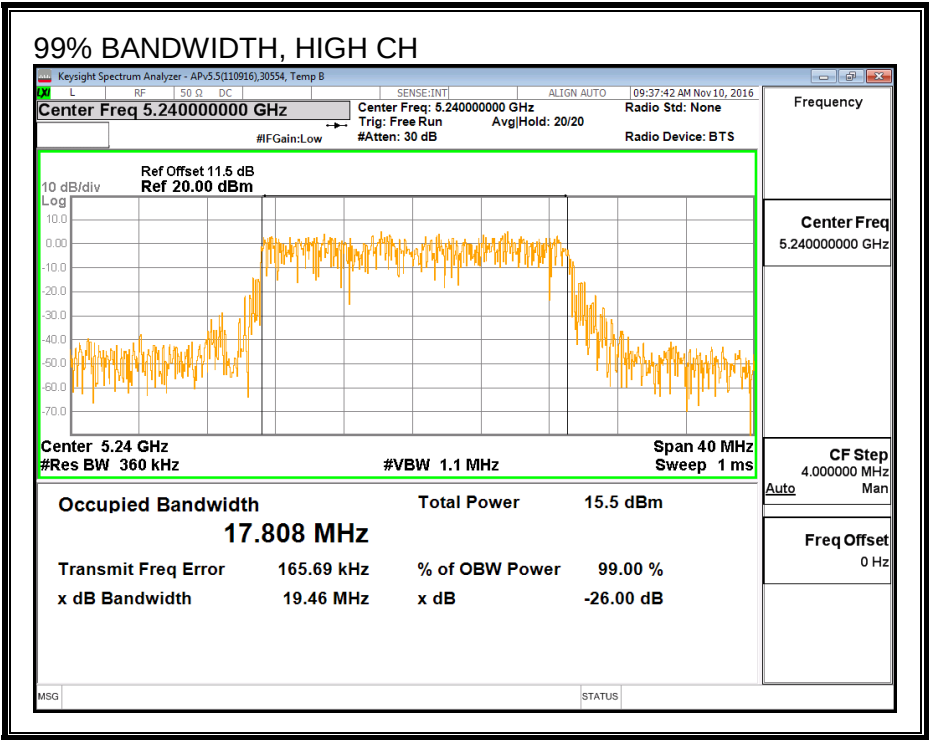

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5180	16.00
Mid	5200	16.49
High	5240	16.45

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.64	2.64	24.00	11.00
Mid	5200	2.64	2.64	24.00	11.00
High	5240	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.00	16.00	24.00	-8.00
Mid	5200	16.49	16.49	24.00	-7.51
High	5240	16.45	16.45	24.00	-7.55

PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.03	6.03	11.00	-4.97
Mid	5200	6.00	6.00	11.00	-5.00
High	5240	5.71	5.71	11.00	-5.29

PSD

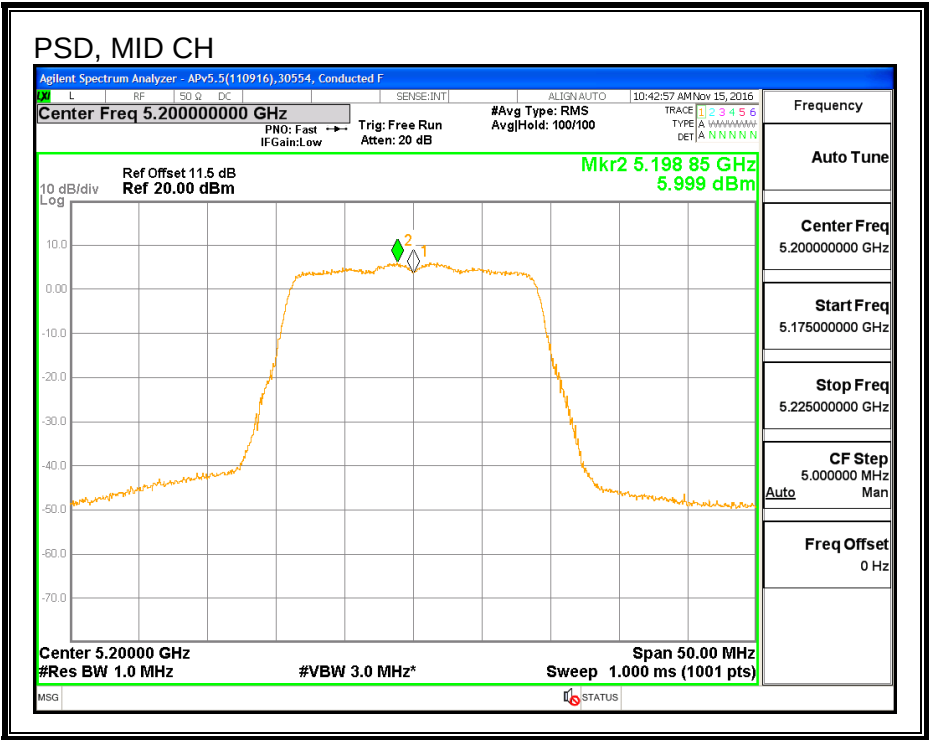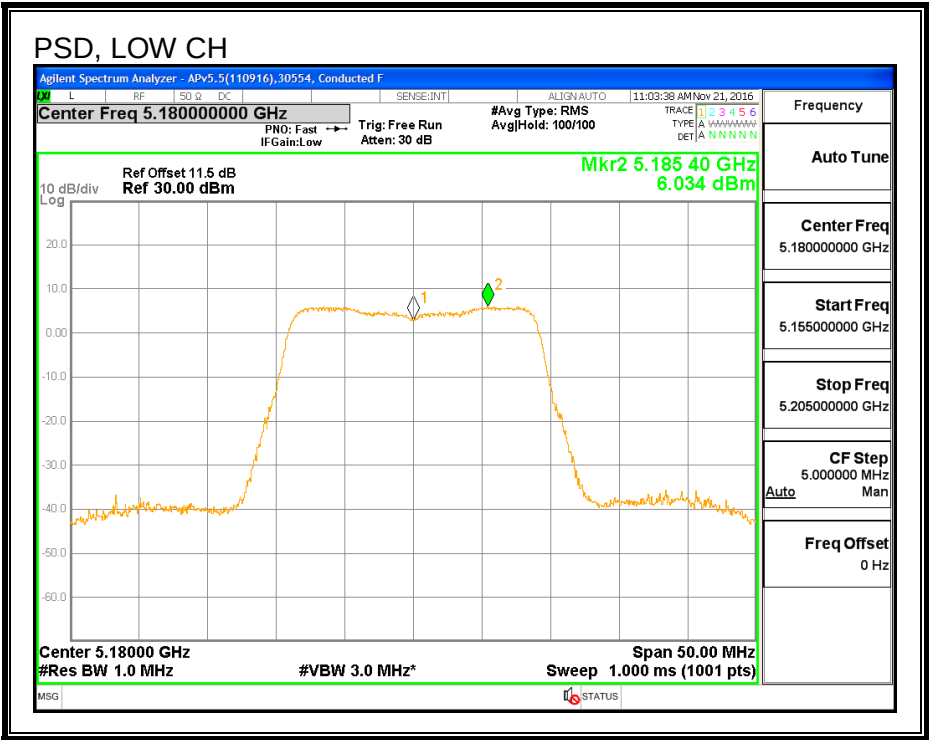

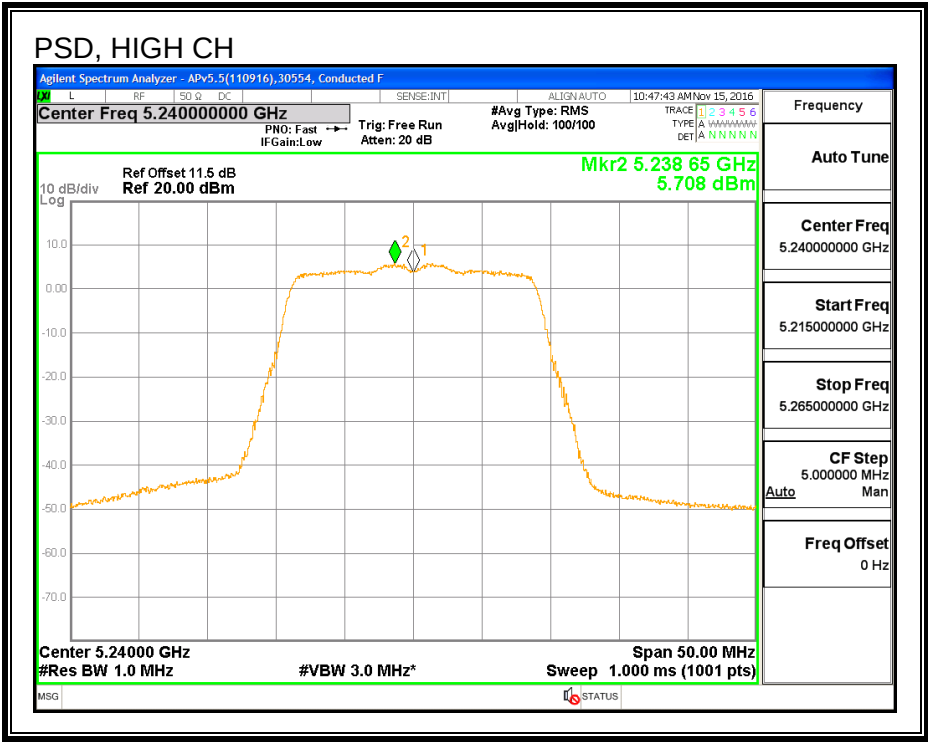

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5180	21.760	21.840
Mid	5200	21.880	21.920
High	5240	21.880	21.840


26 dB BANDWIDTH, ANTENNA A

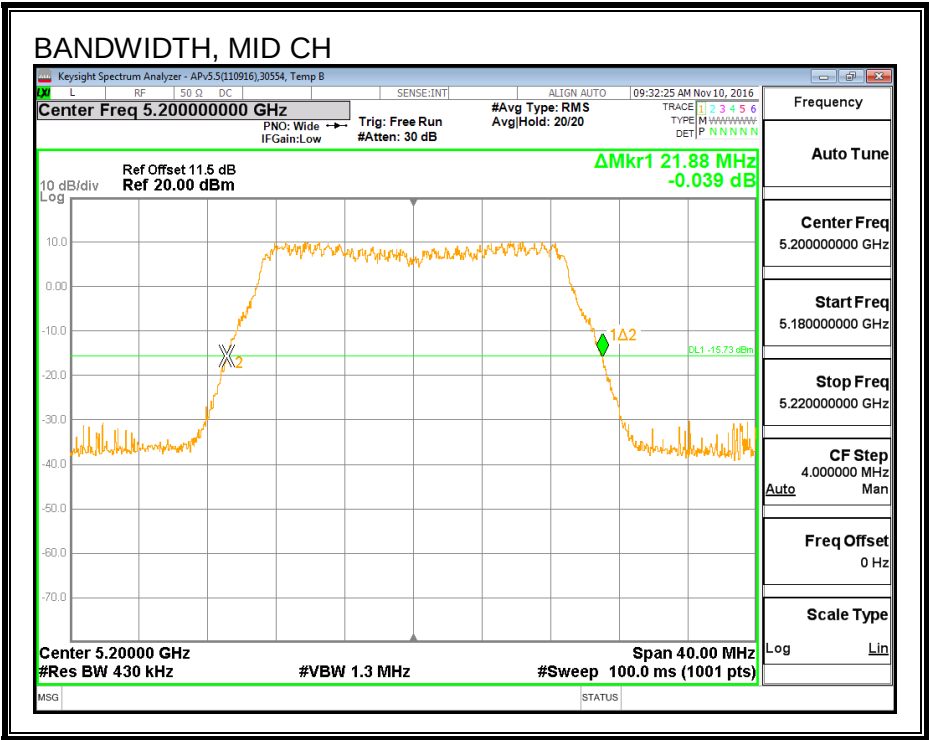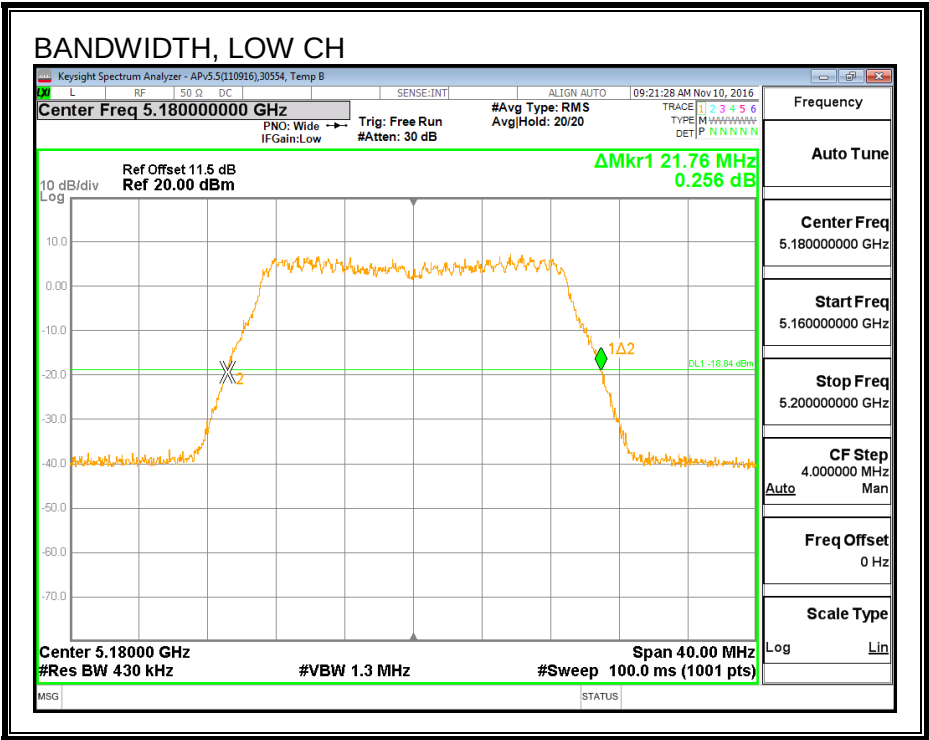

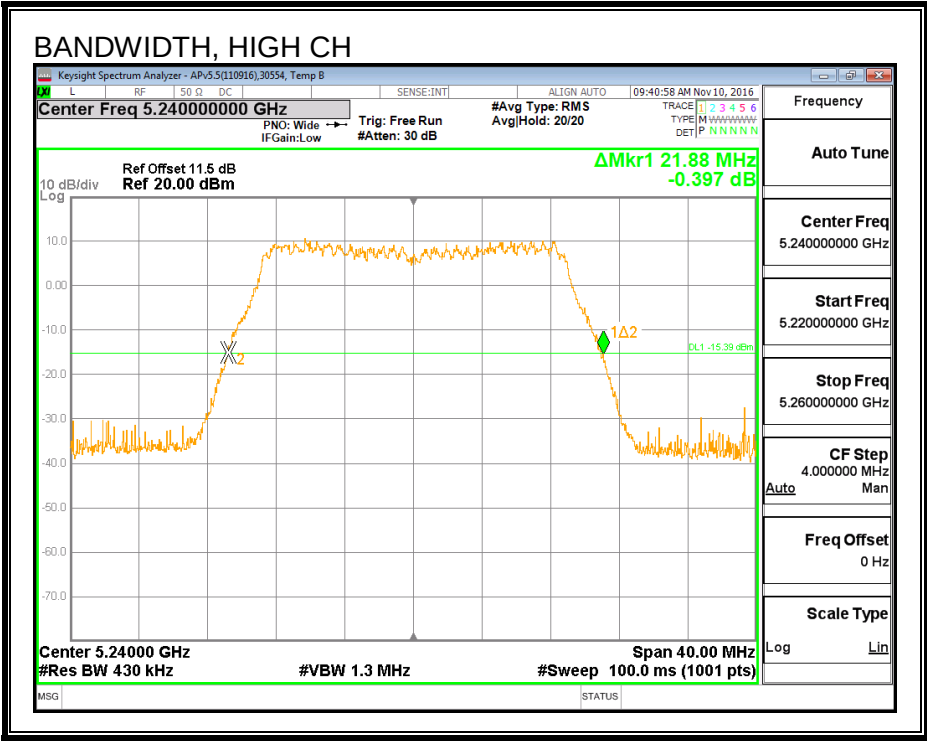

26 dB BANDWIDTH, ANTENNA B

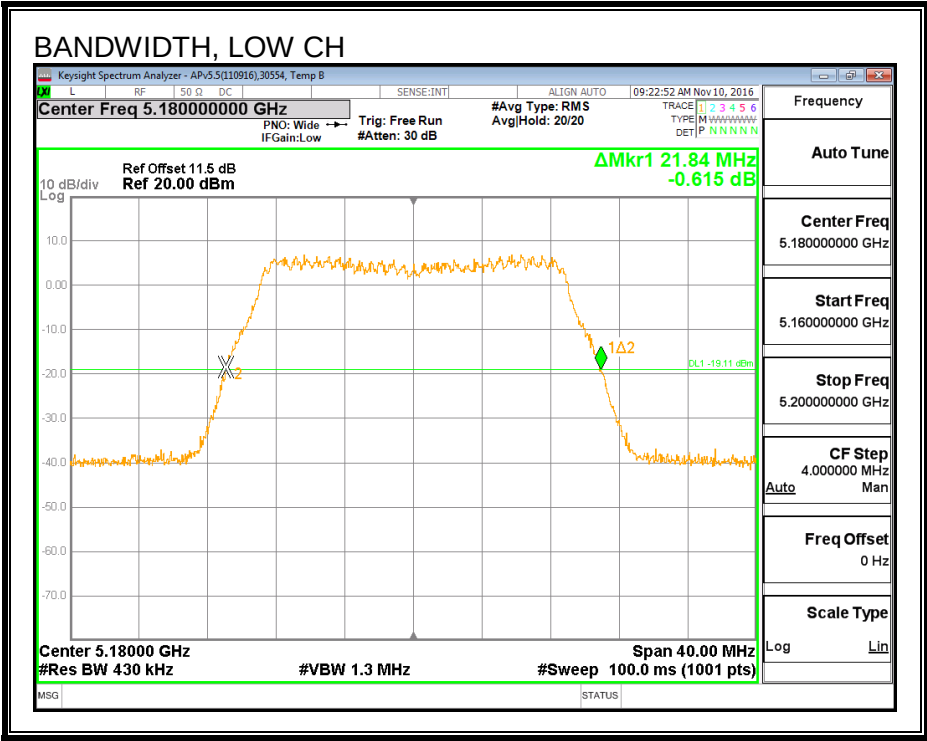

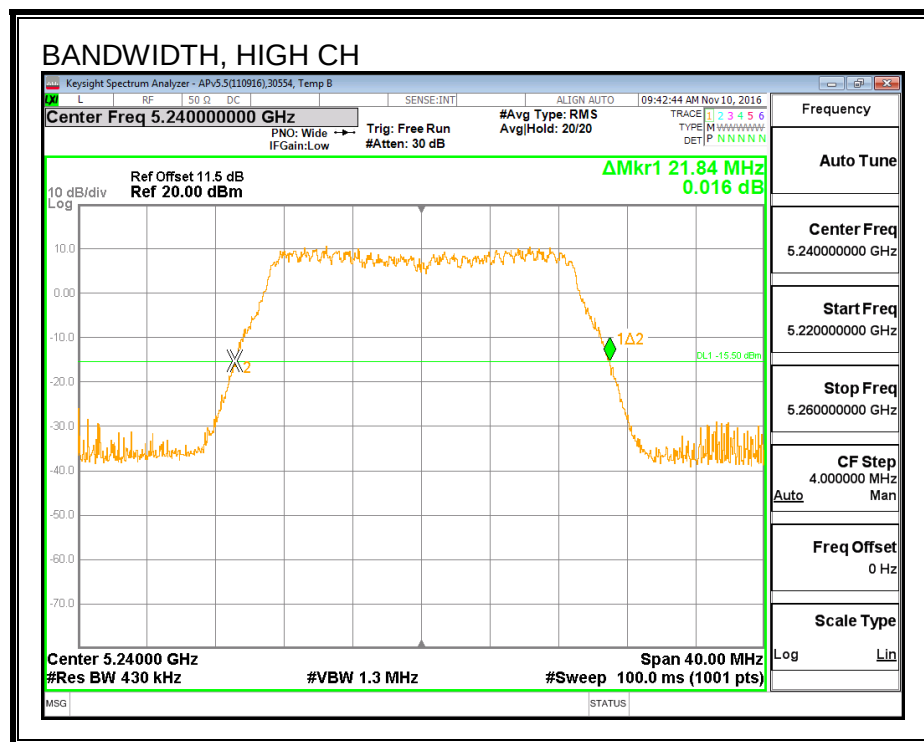

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5180	17.877	17.883
Mid	5200	17.882	18.043
High	5240	17.803	17.766



99% BANDWIDTH, ANTENNA A

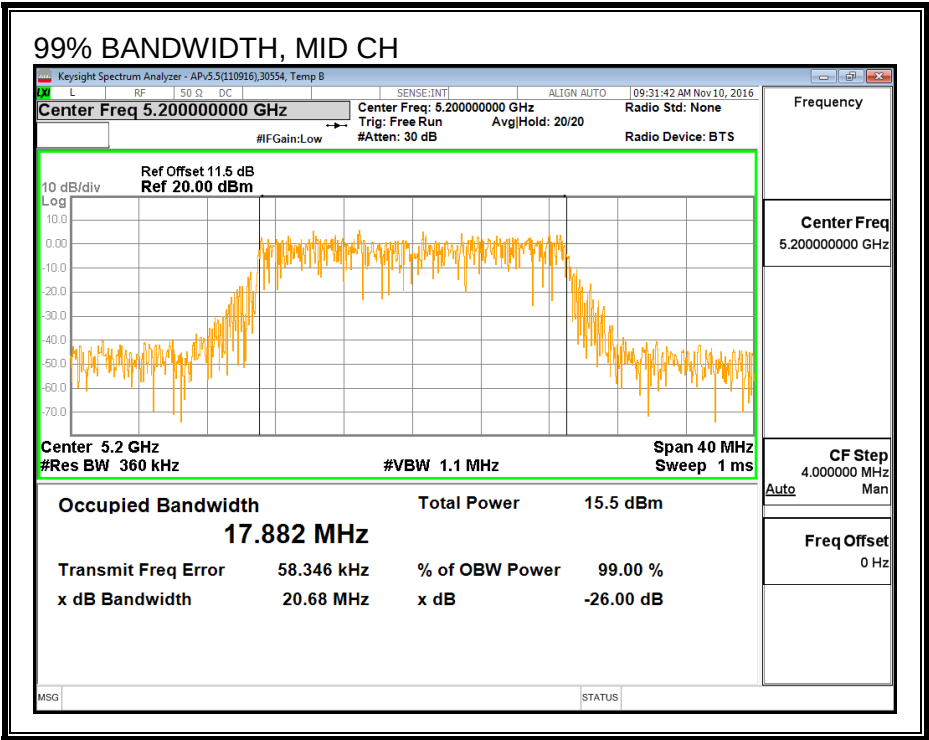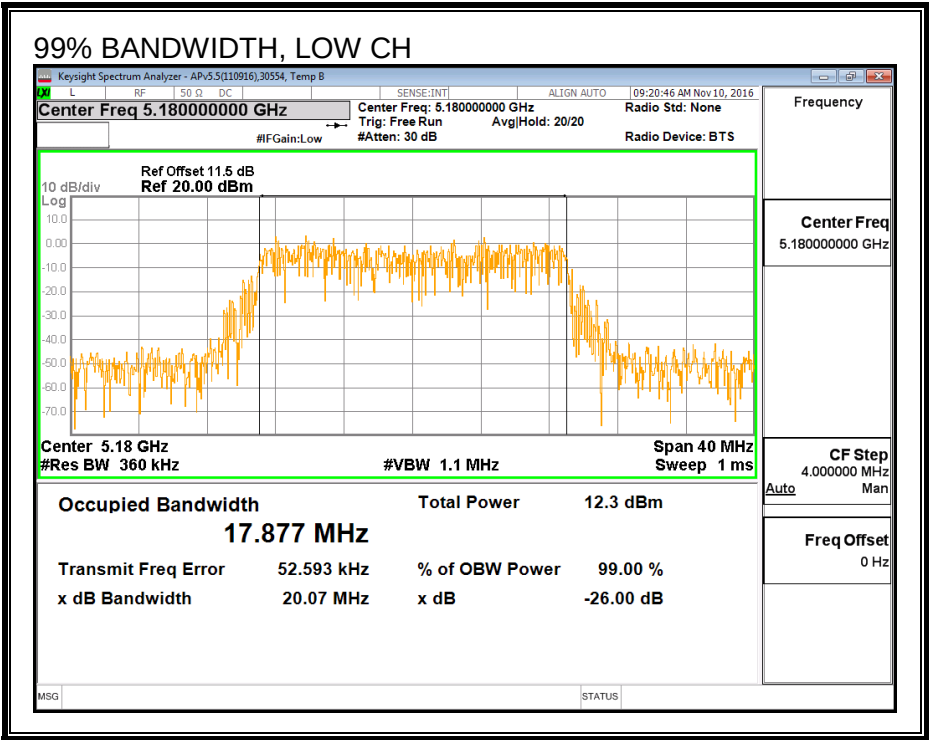

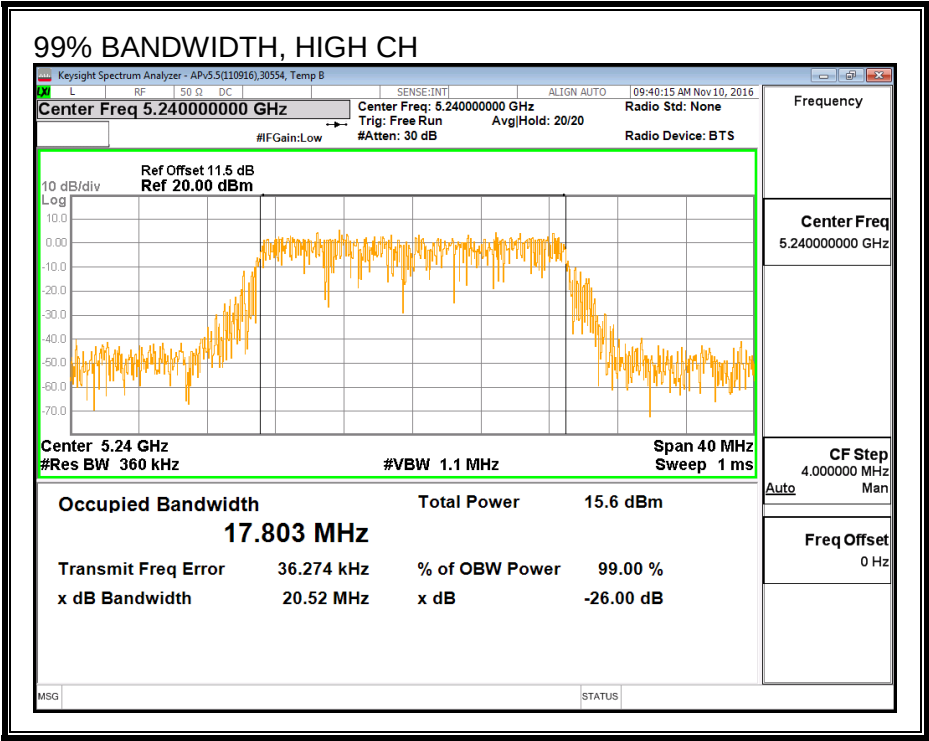

99% BANDWIDTH, ANTENNA B

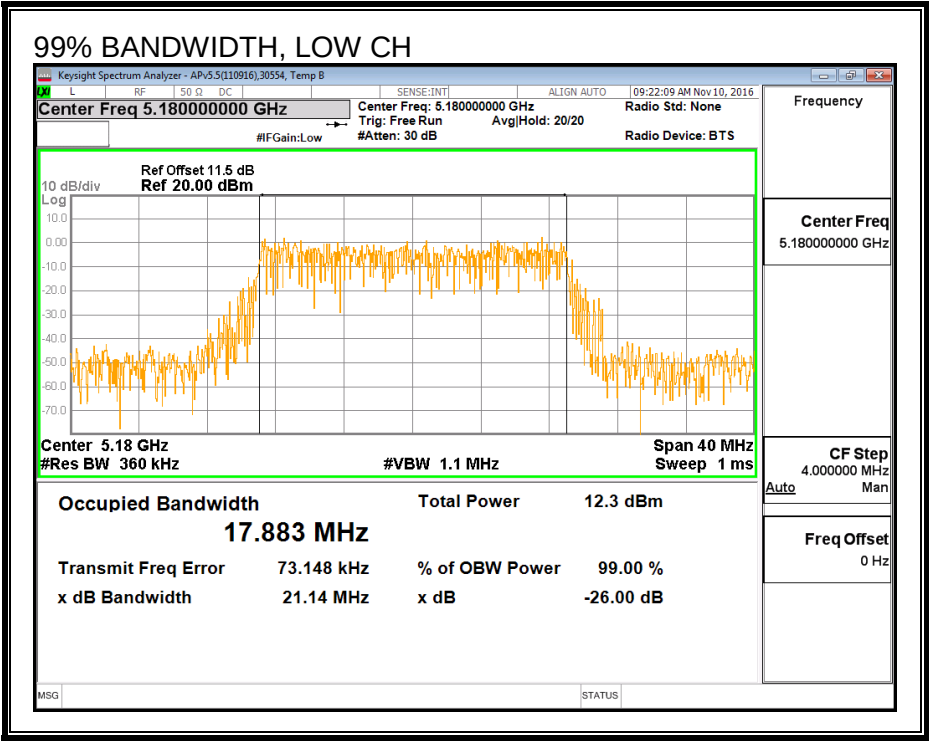

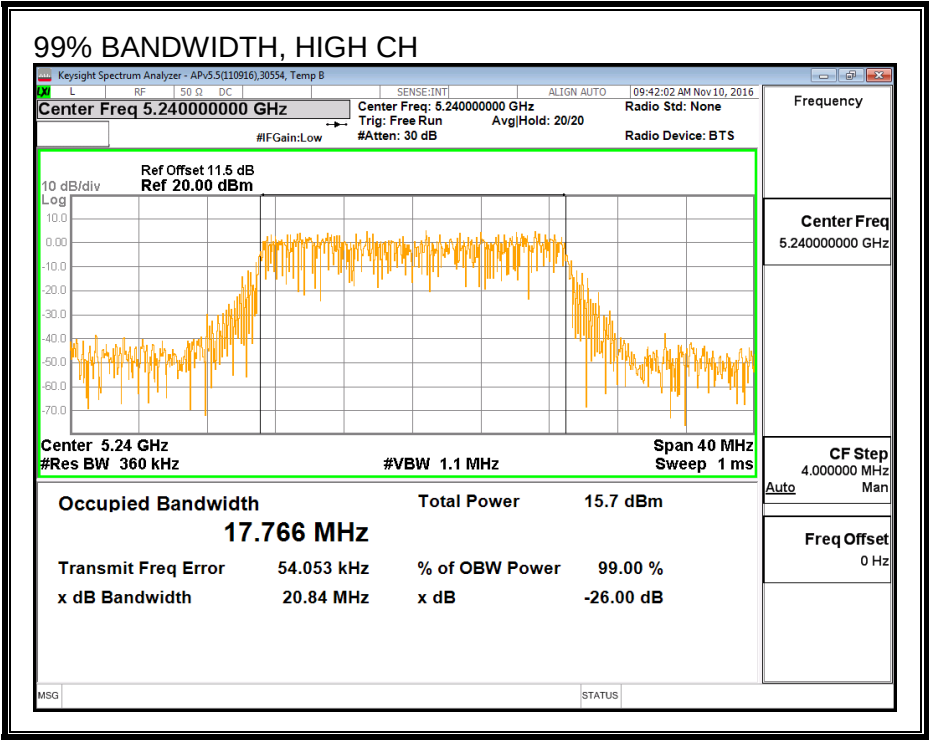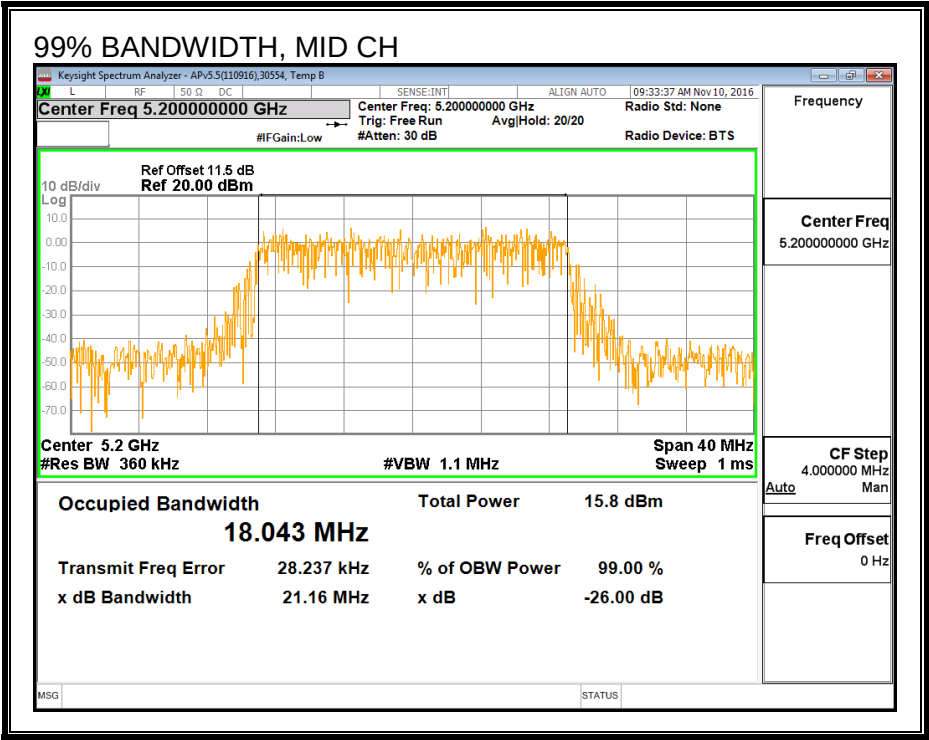

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5180	14.37	14.50	17.45
Mid	5200	16.34	16.47	19.42
High	5240	16.32	16.49	19.42

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.01	4.99	24.00	11.00
Mid	5200	2.01	4.99	24.00	11.00
High	5240	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.37	14.50	17.45	24.00	-6.55
Mid	5200	16.34	16.47	19.42	24.00	-4.58
High	5240	16.32	16.49	19.42	24.00	-4.58

PSD Results


Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.04	6.10	9.08	11.00	-1.92
Mid	5200	6.03	6.18	9.12	11.00	-1.88
High	5240	5.63	5.66	8.66	11.00	-2.34



PSD, ANTENNA A

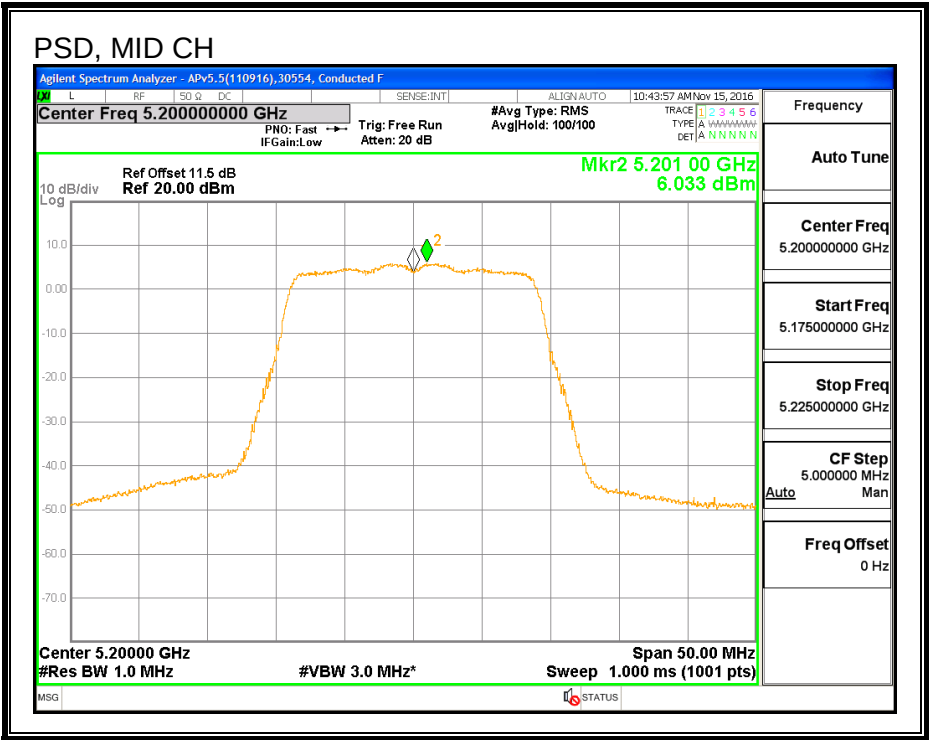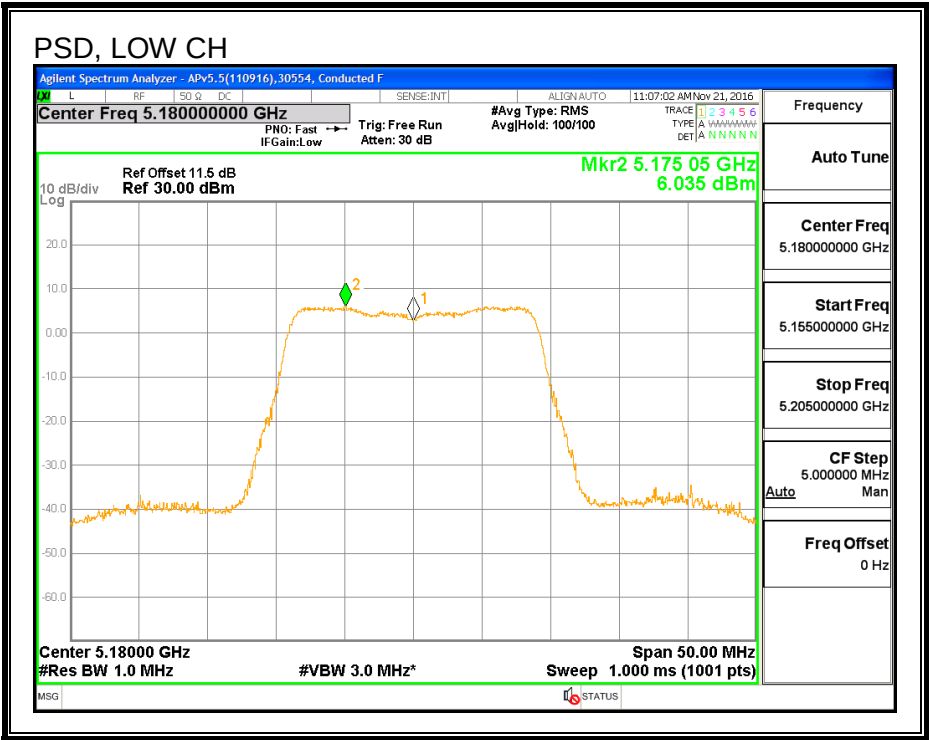

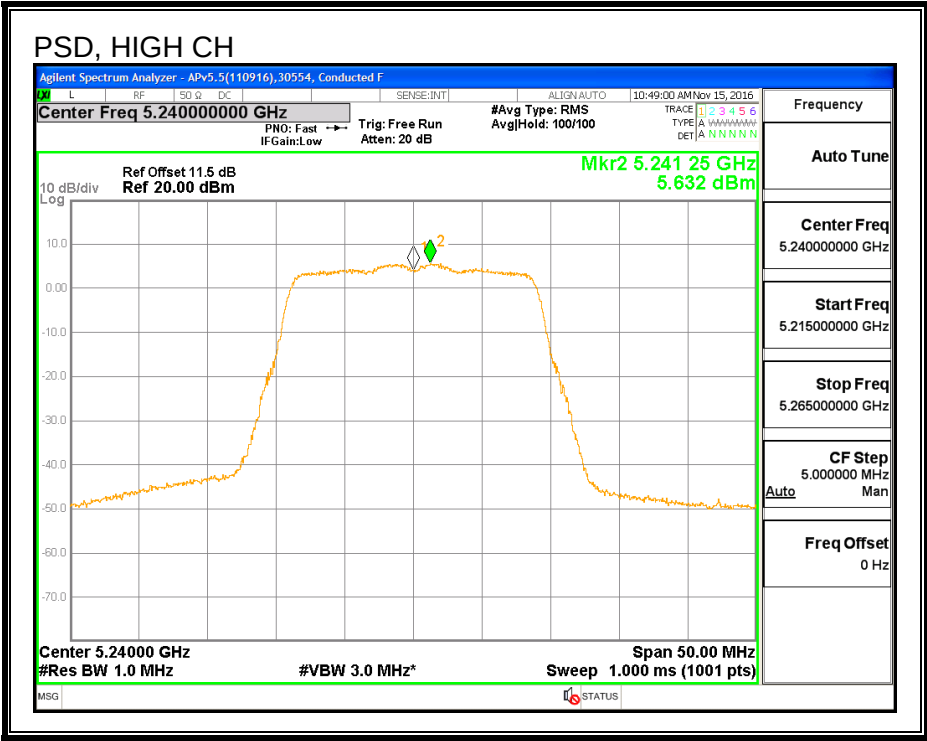

PSD, ANTENNA B

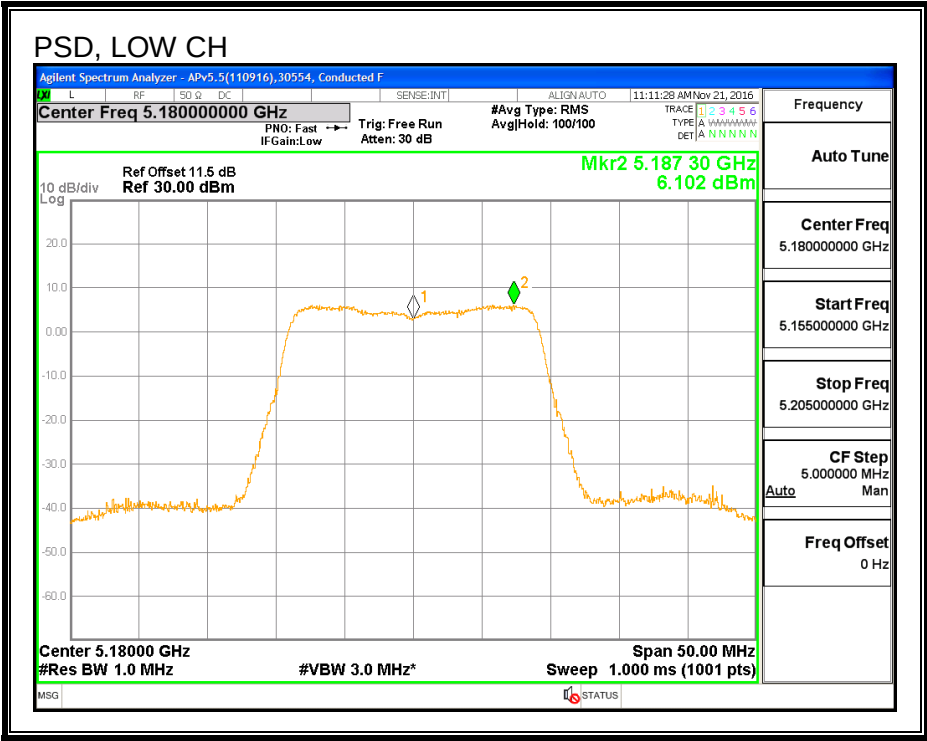

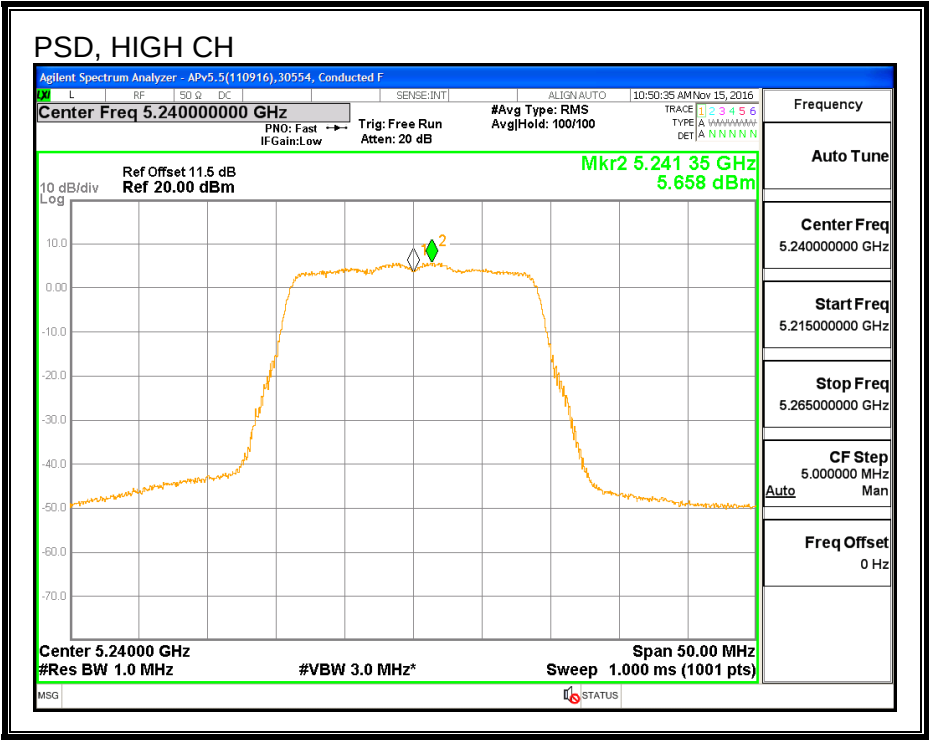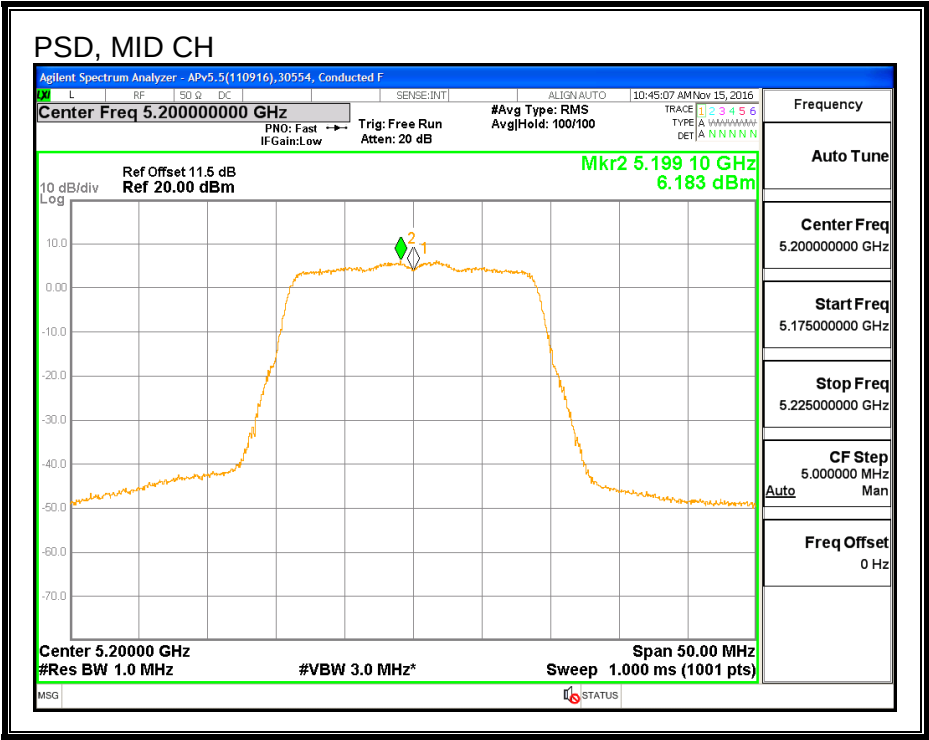

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

Noted: Covered by 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.400
High	5230	40.640

26 dB BANDWIDTH

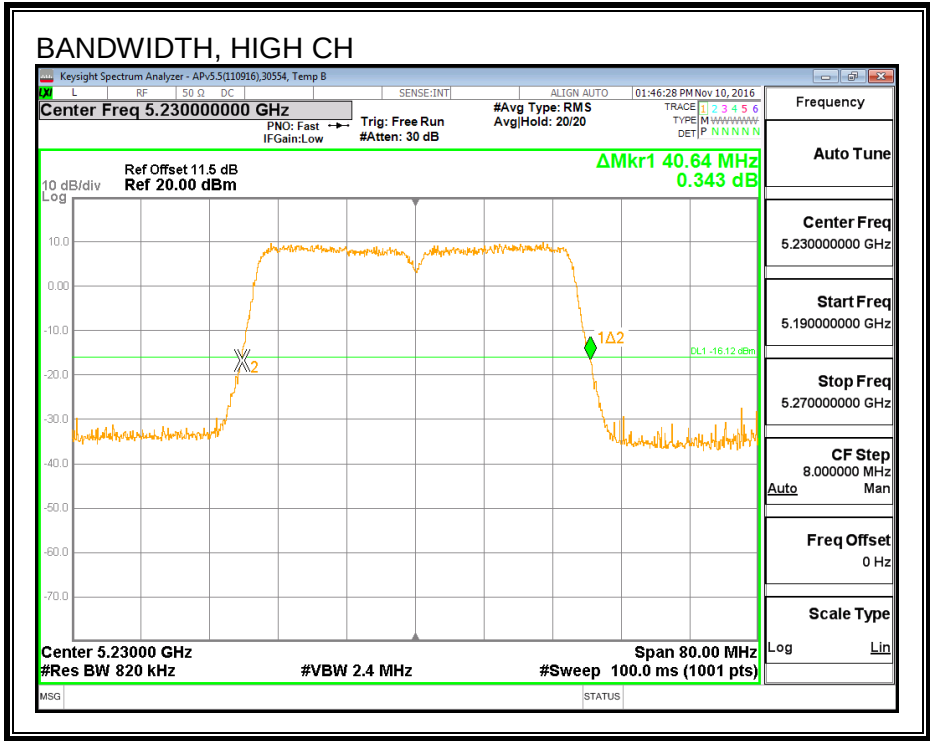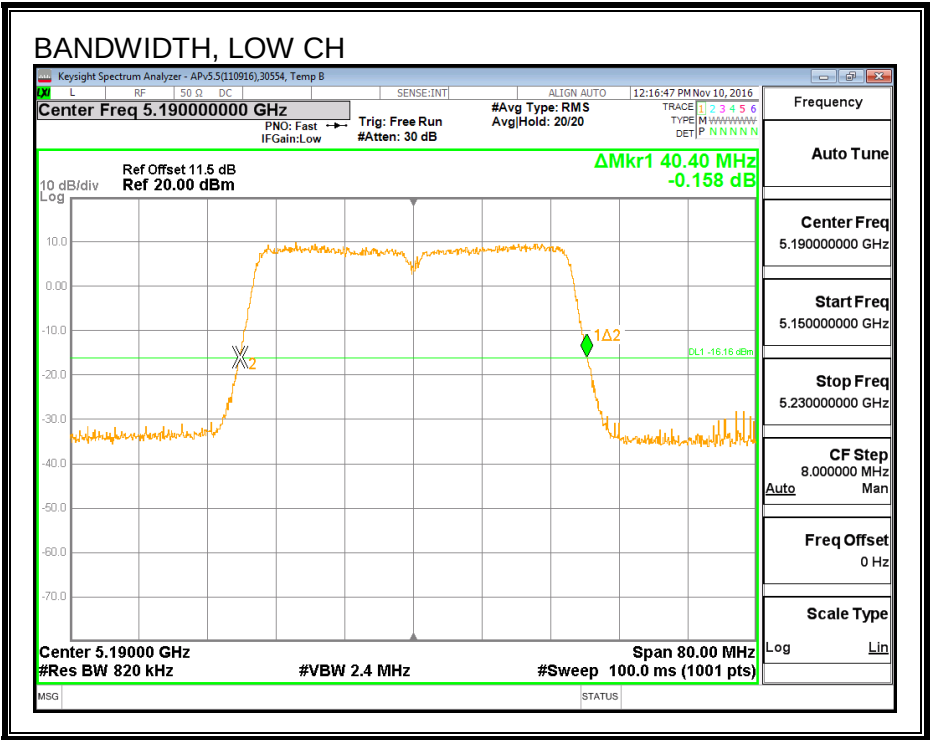

8.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.482
High	5230	36.424

99% BANDWIDTH

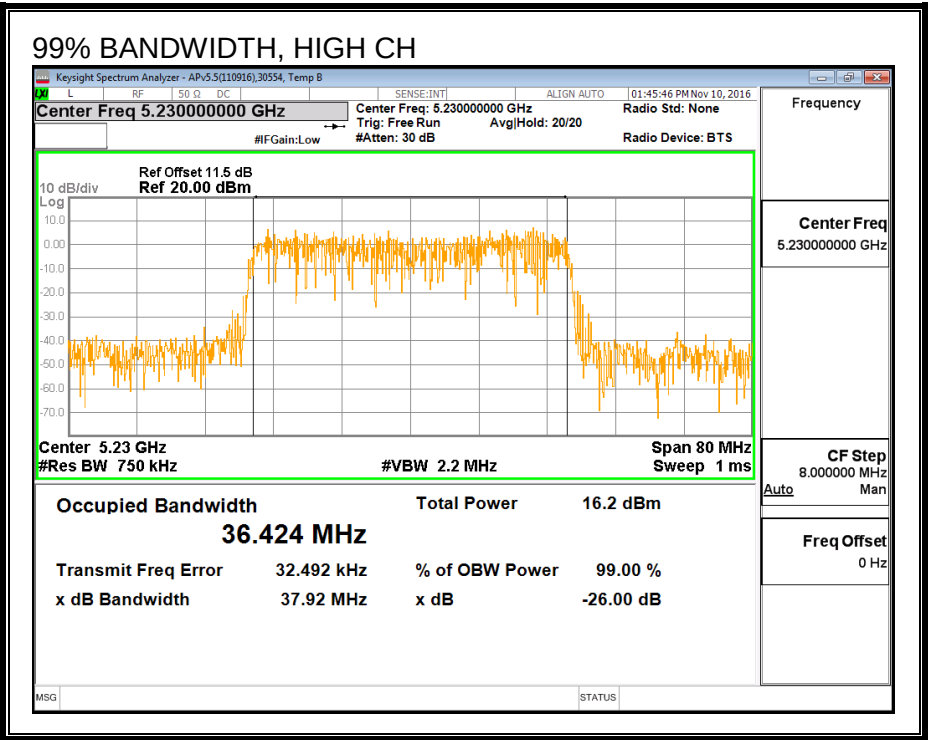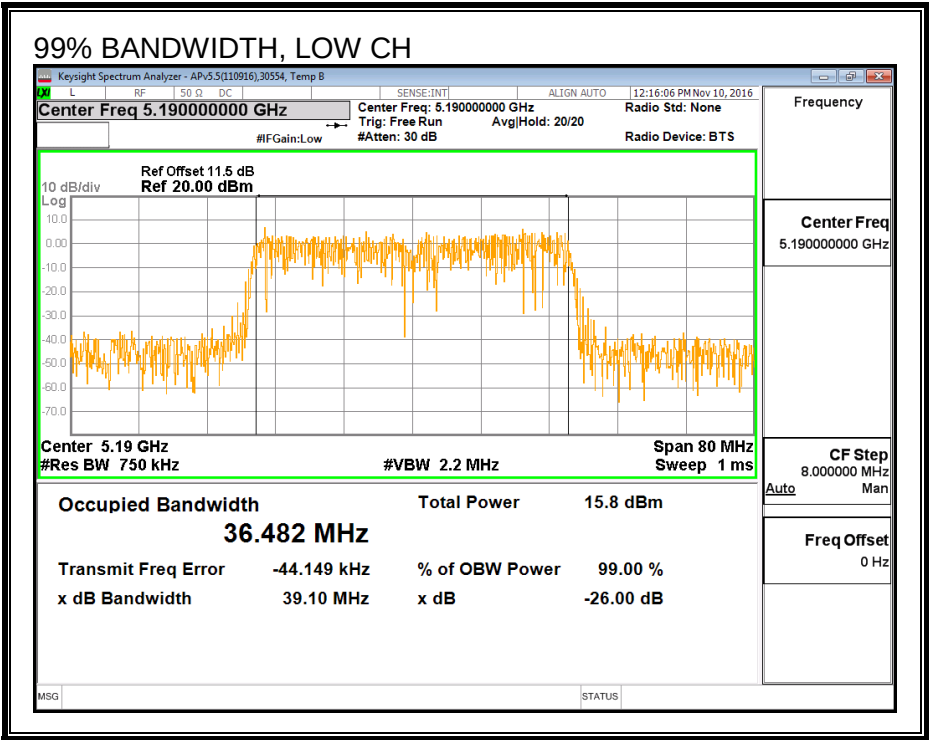

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.36
High	5230	16.40

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.27	1.27	24.00	11.00
High	5230	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.36	14.36	24.0	-9.64
High	5230	16.40	16.40	24.0	-7.60

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.870	2.97	11.00	-8.03
High	5230	2.887	2.99	11.00	-8.01

PSD

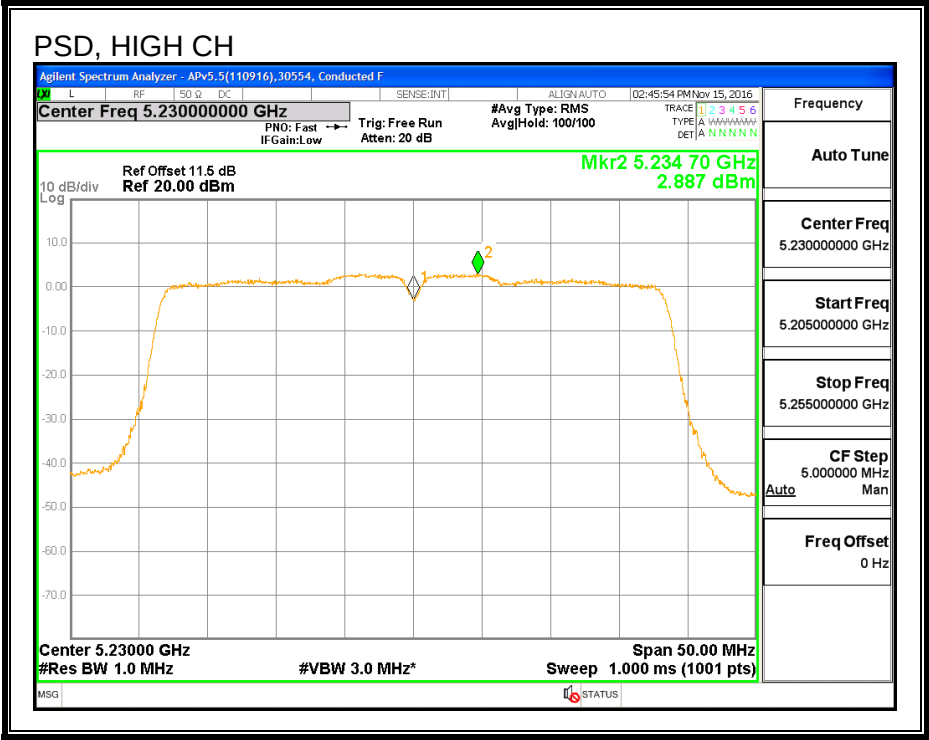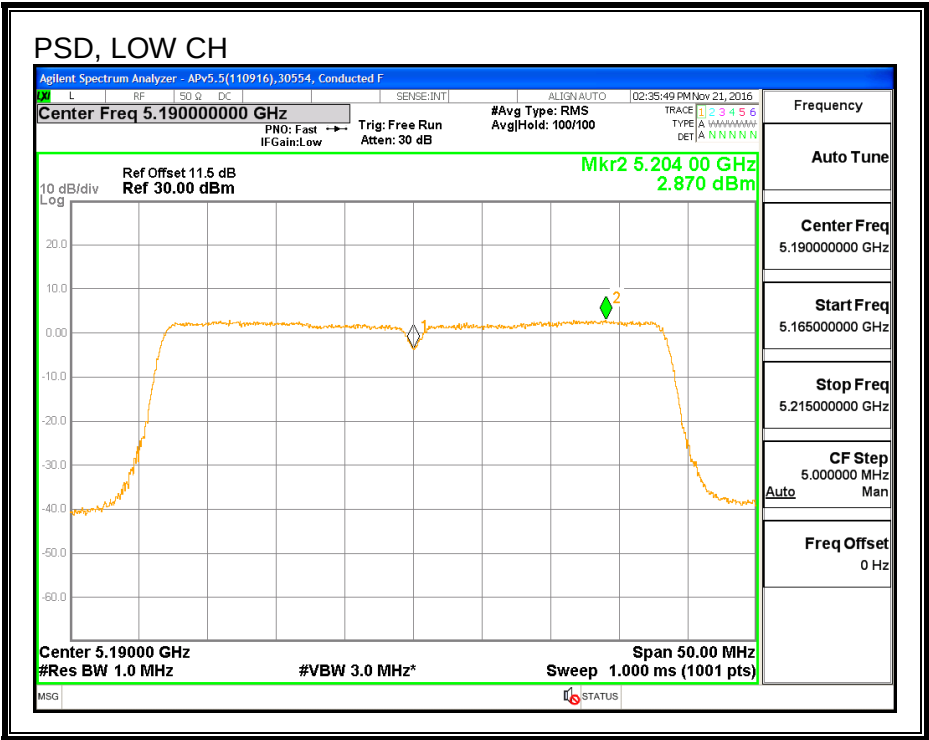

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.480
High	5230	40.560

26 dB BANDWIDTH

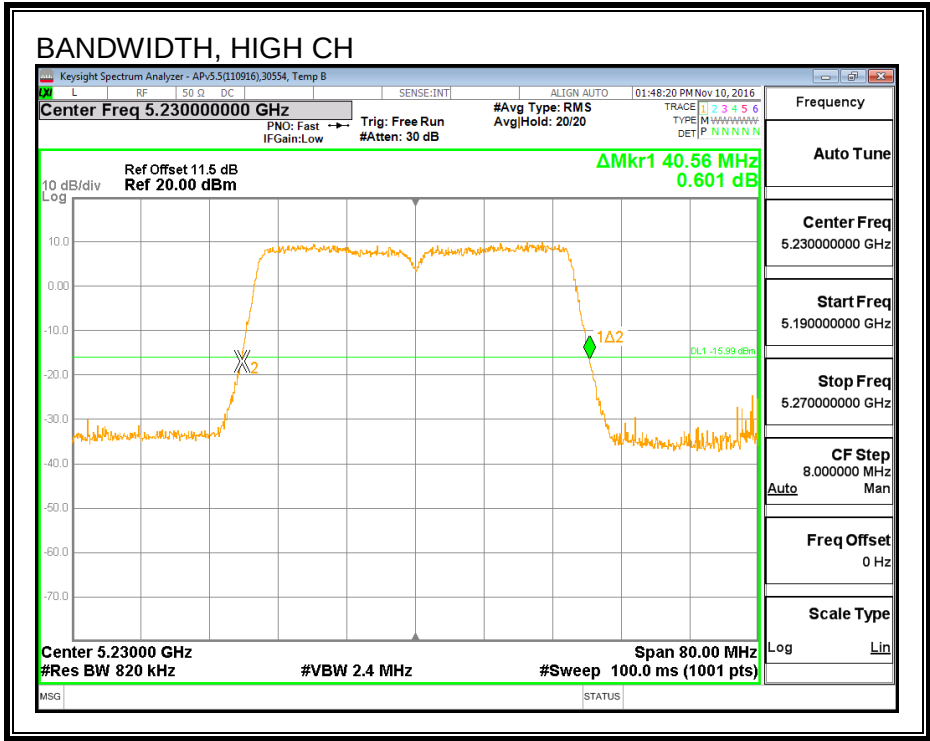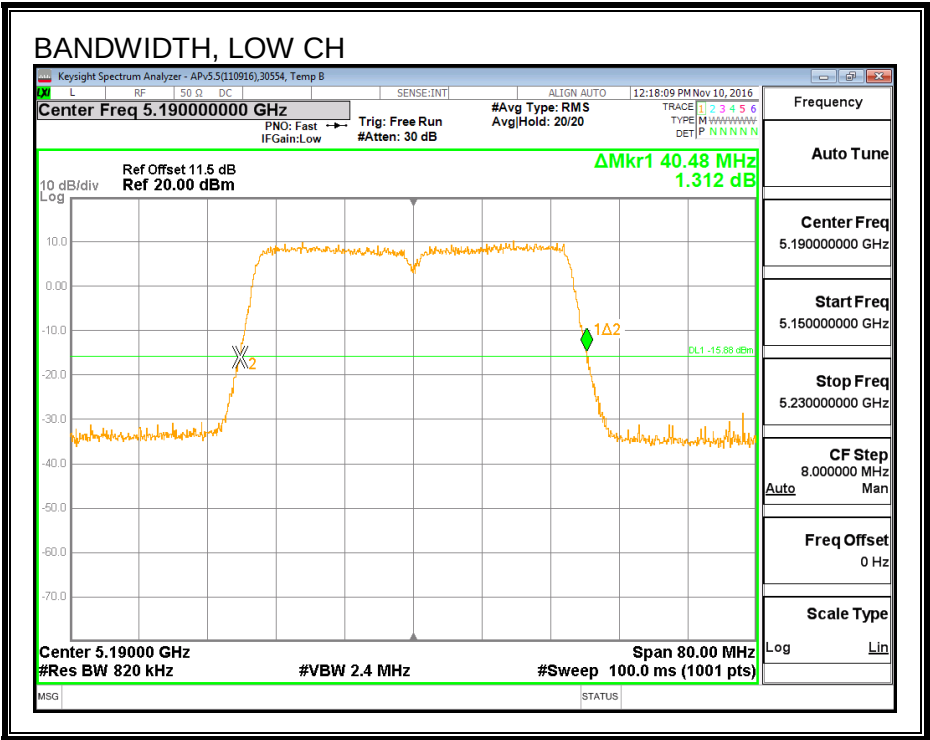

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.560
High	5230	36.459

99% BANDWIDTH

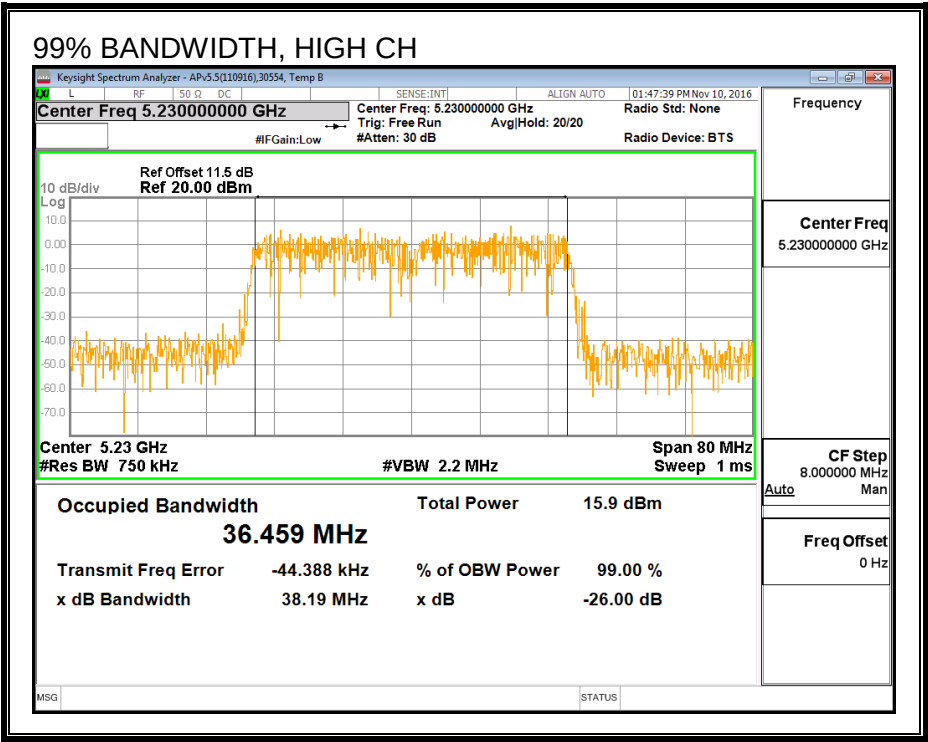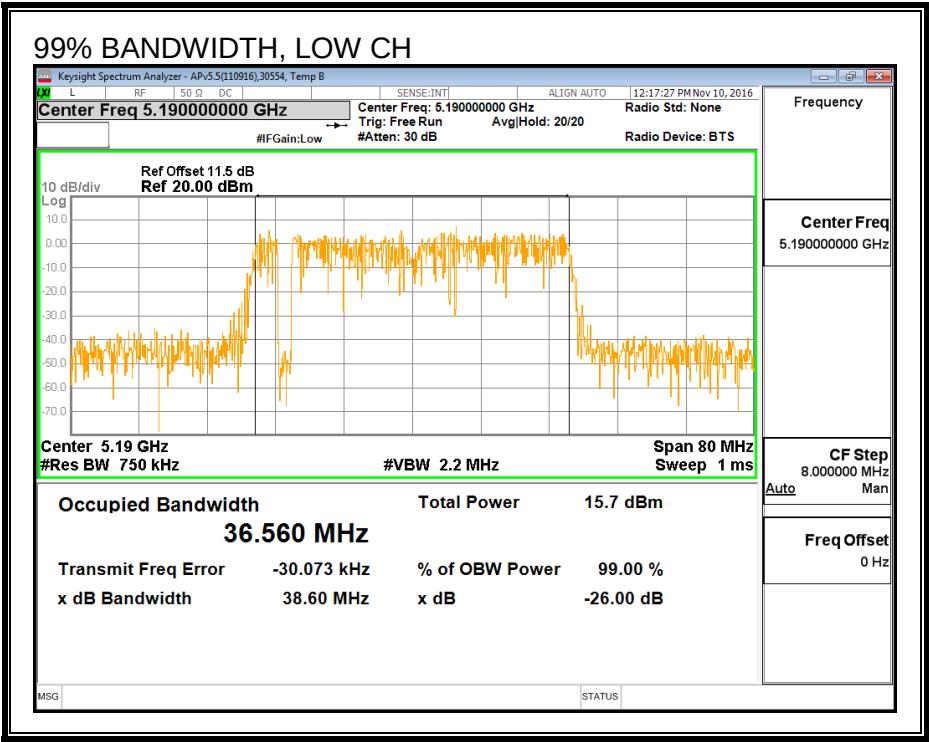

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.29
High	5230	16.38

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.64	2.64	24.00	11.00
High	5230	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.29	14.29	24.00	-9.71
High	5230	16.38	16.38	24.00	-7.62

PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.794	2.89	11.00	-8.11
High	5230	3.169	3.27	11.00	-7.73

PSD

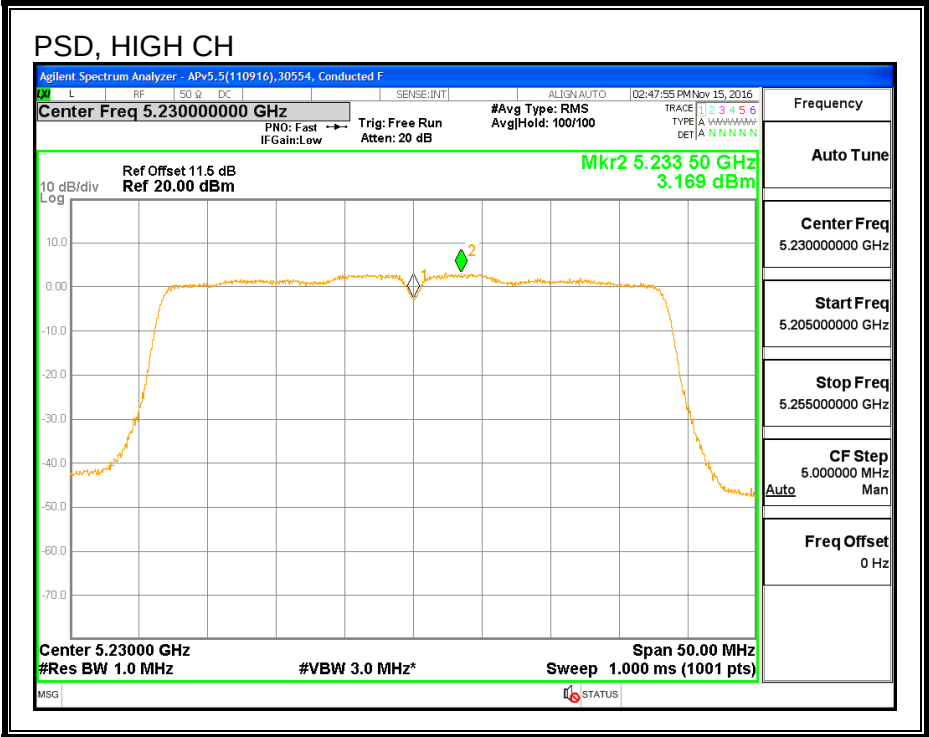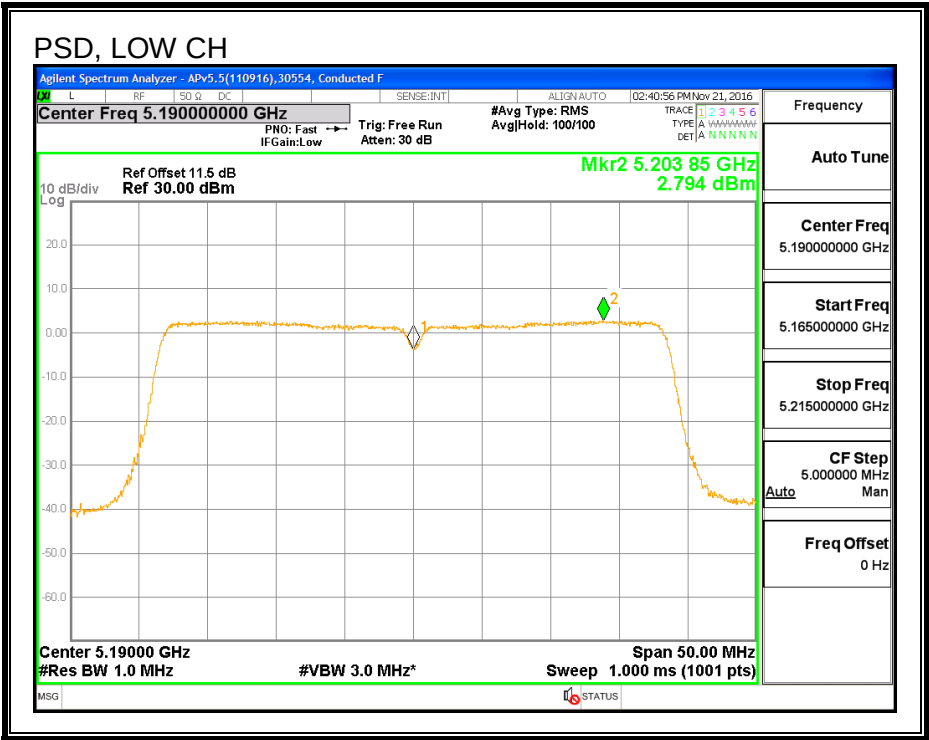

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5190	40.560	40.480
High	5230	40.480	40.400

26 DB BANDWIDTH, ANTENNA A

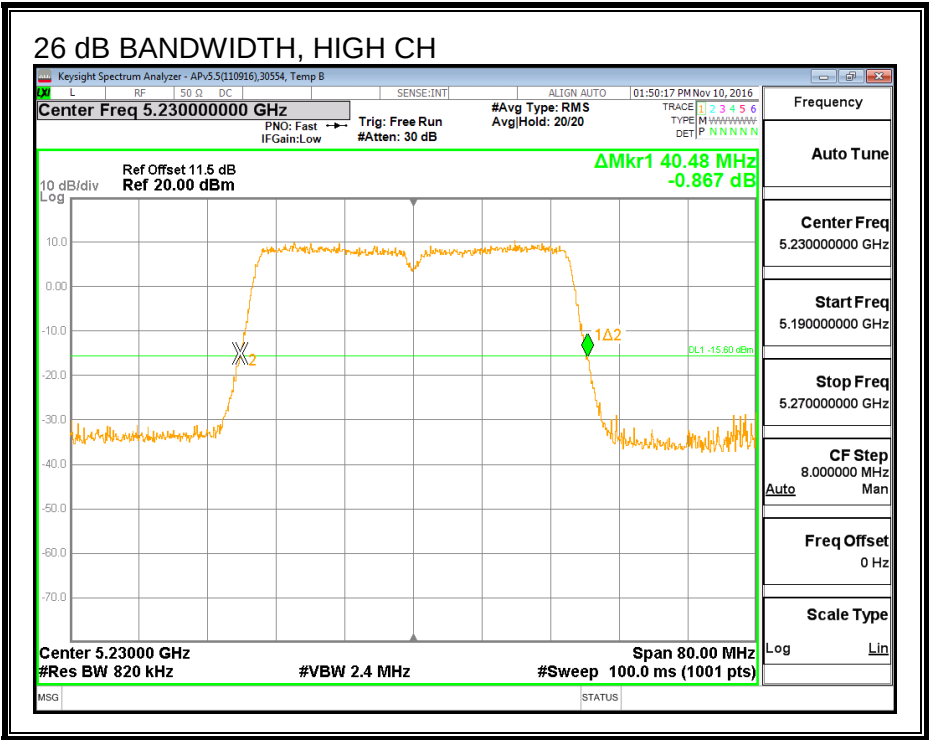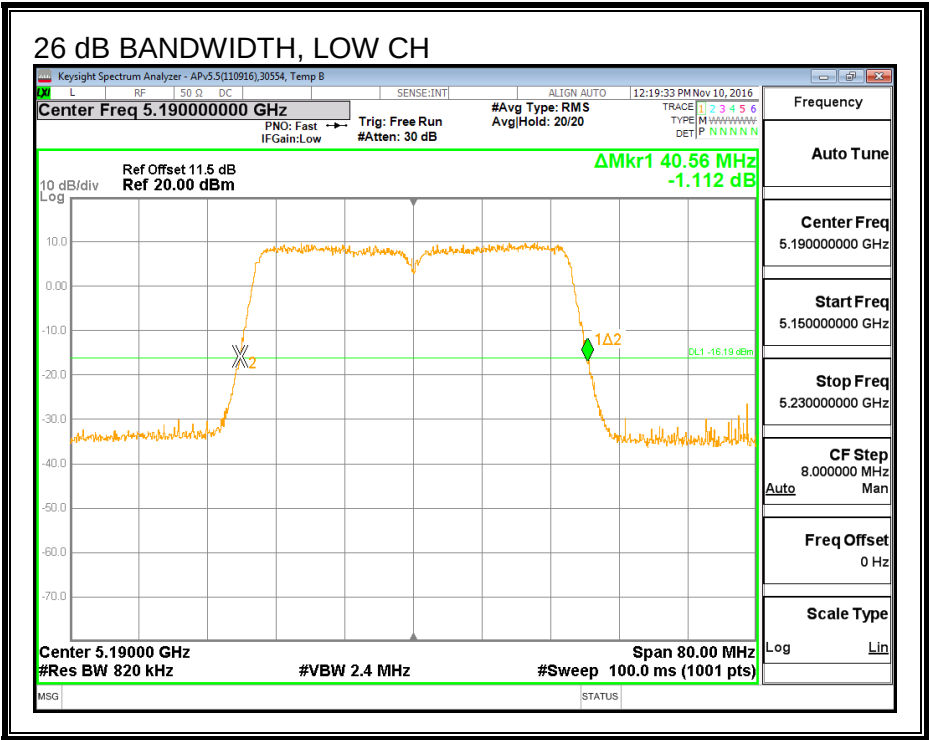

26 DB BANDWIDTH, ANTENNA B

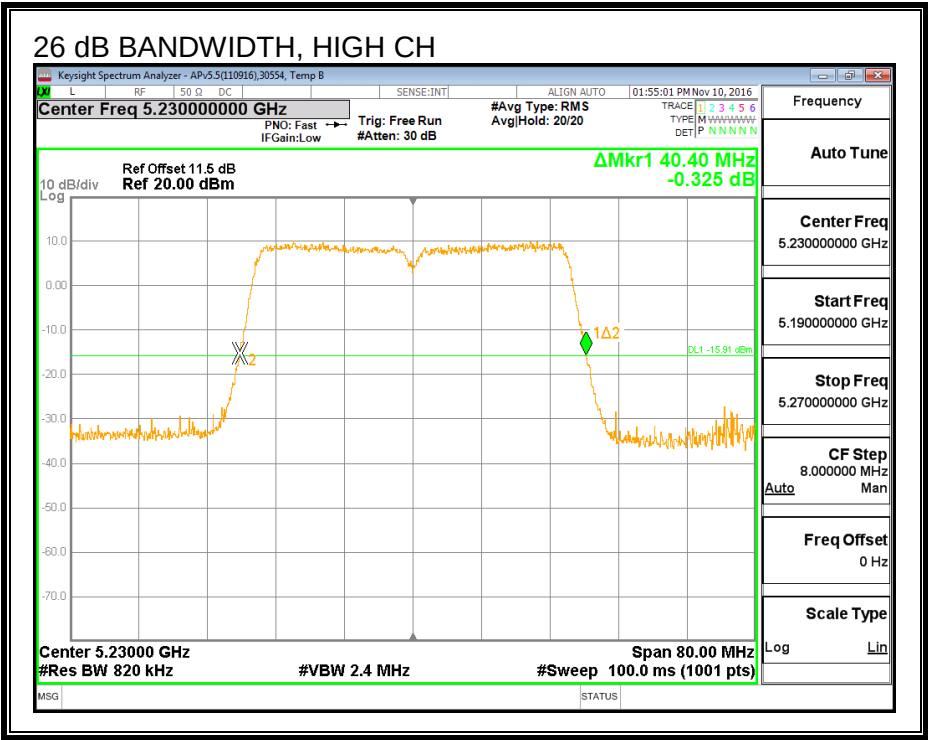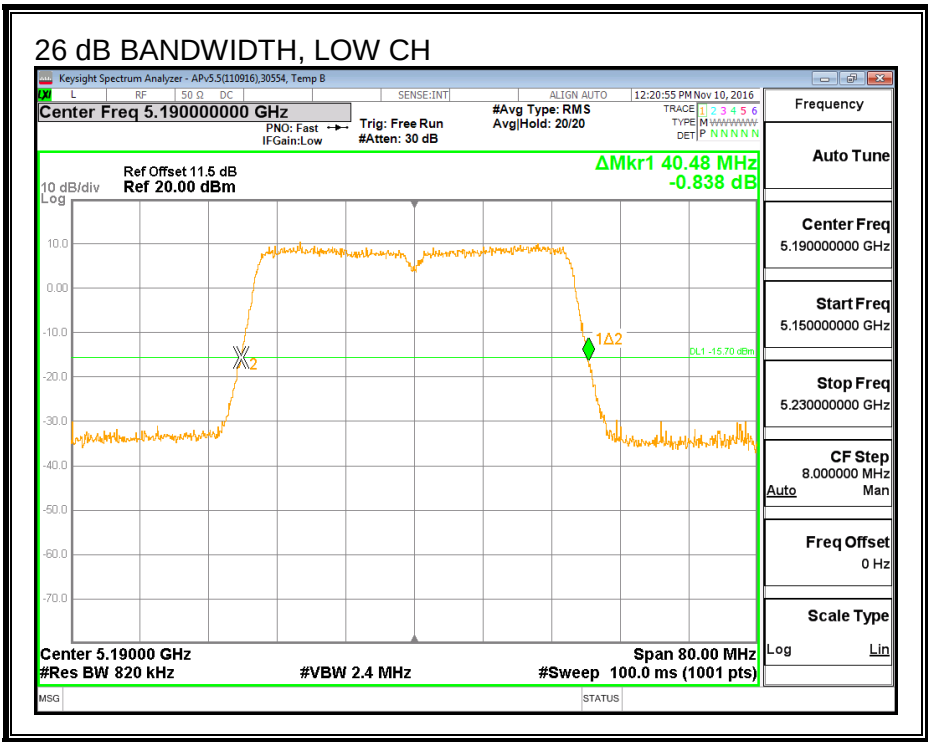

8.7.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5190	36.420	36.517
High	5230	36.390	36.441

99% BANDWIDTH, ANTENNA A

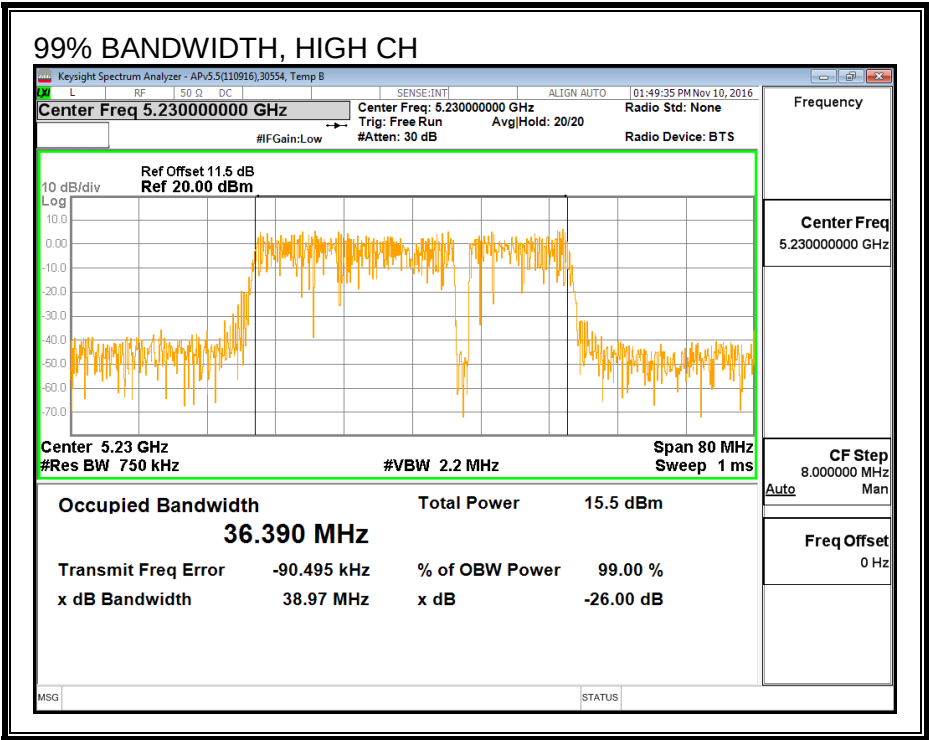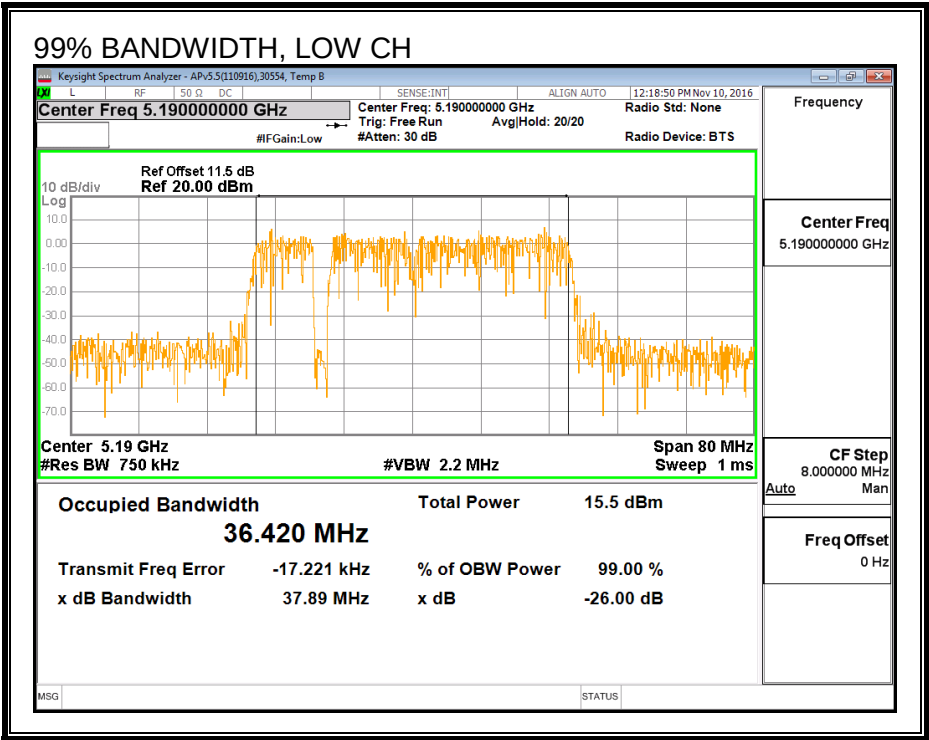

99% BANDWIDTH, ANTENNA B

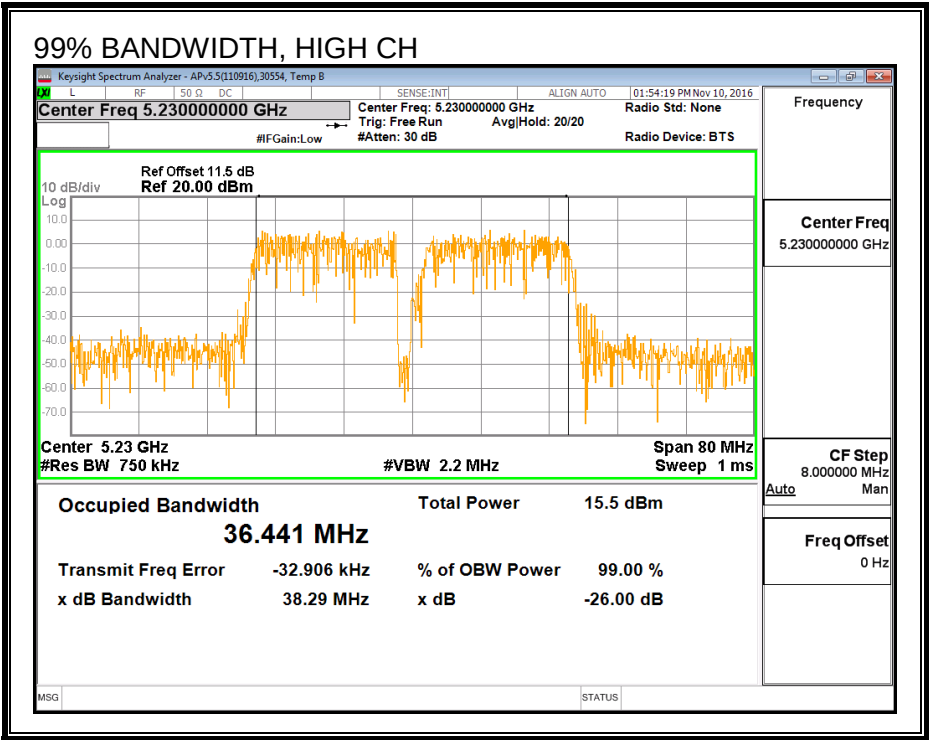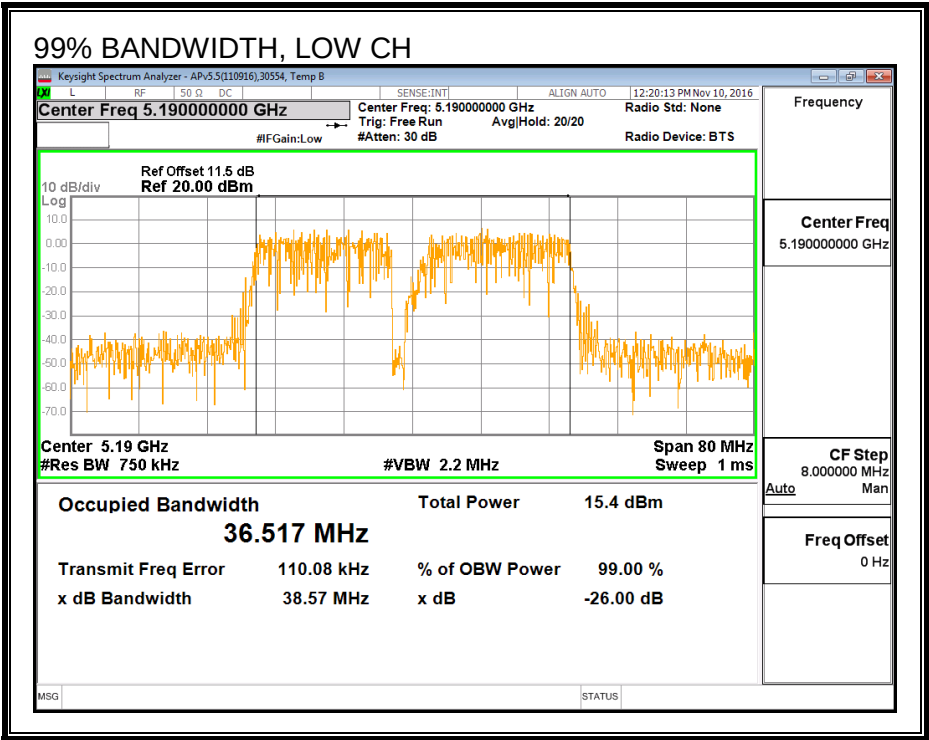

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5190	13.35	13.47	16.42
High	5230	16.41	16.50	19.47

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

RESULTS

ID:	39472	Date:	12/14/16
------------	-------	--------------	----------

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.01	4.99	24.00	11.00
High	5230	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.35	13.47	16.42	24.00	-7.58
High	5230	16.41	16.50	19.47	24.00	-4.53



PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.92	2.98	6.06	11.00	-4.94
High	5230	3.17	2.98	6.19	11.00	-4.81

PSD, ANTENNA A

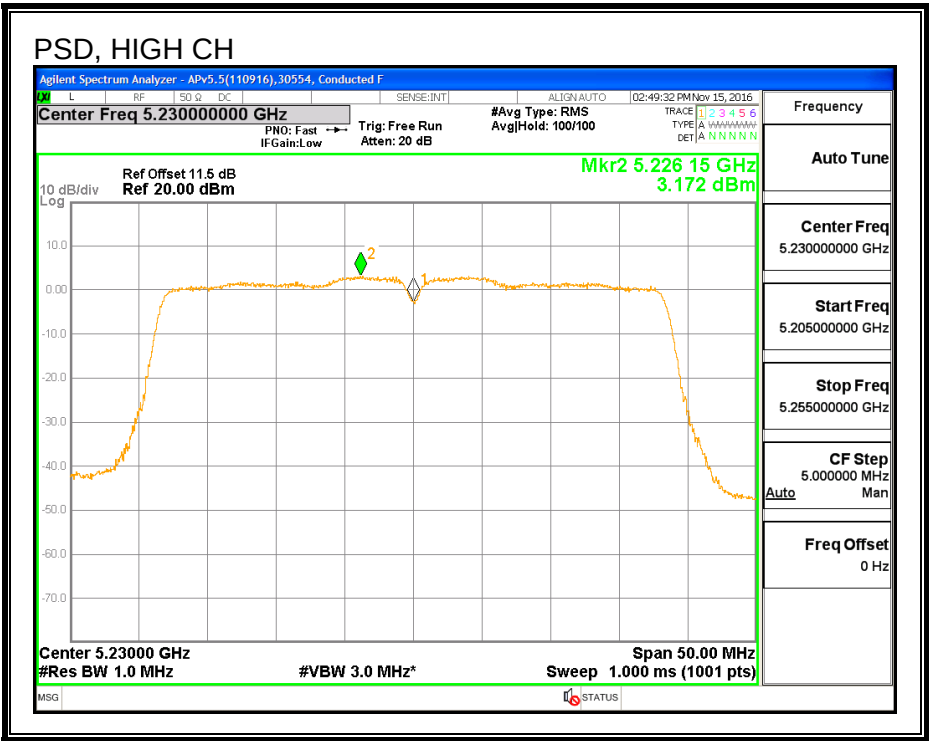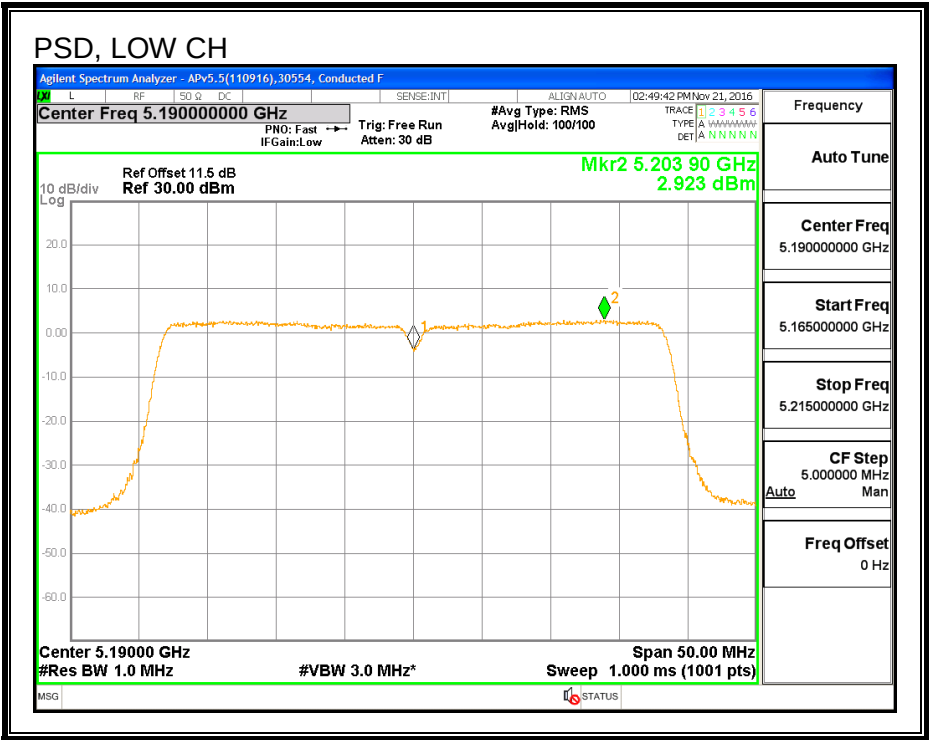

PSD, ANTENNA B

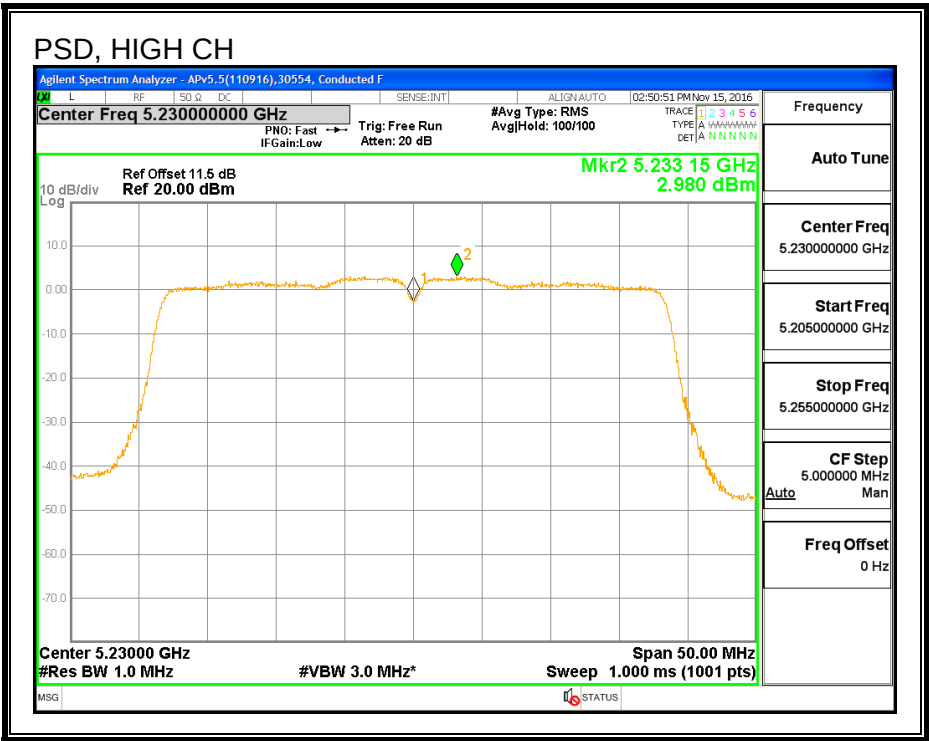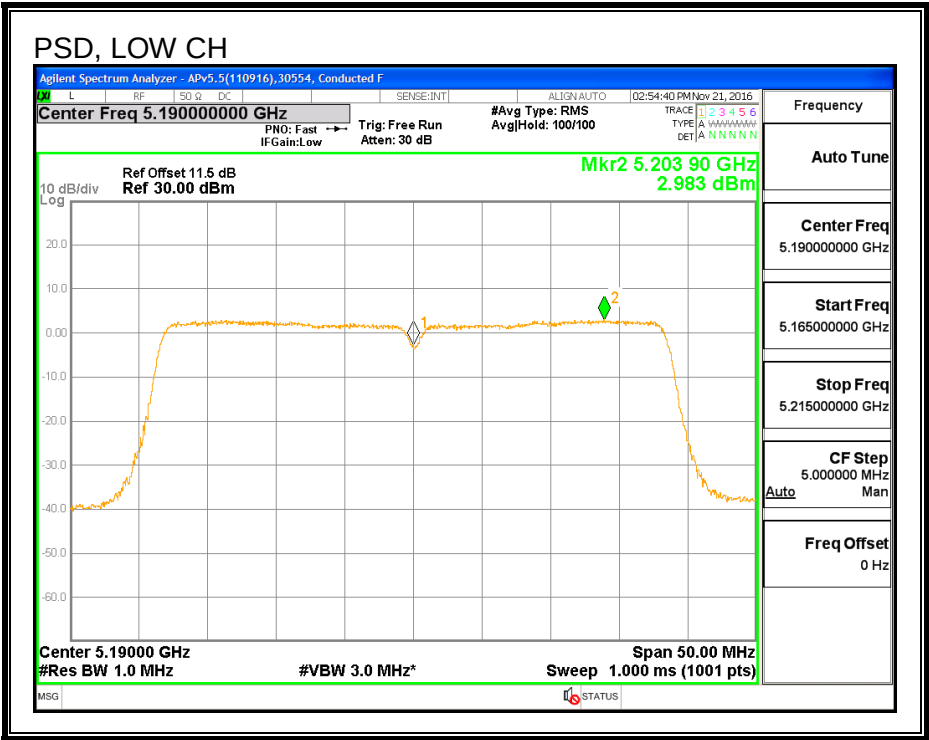

**8.8. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE
5.2 GHz BAND**

Noted: Covered by 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.9. 802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.400

26 dB BANDWIDTH

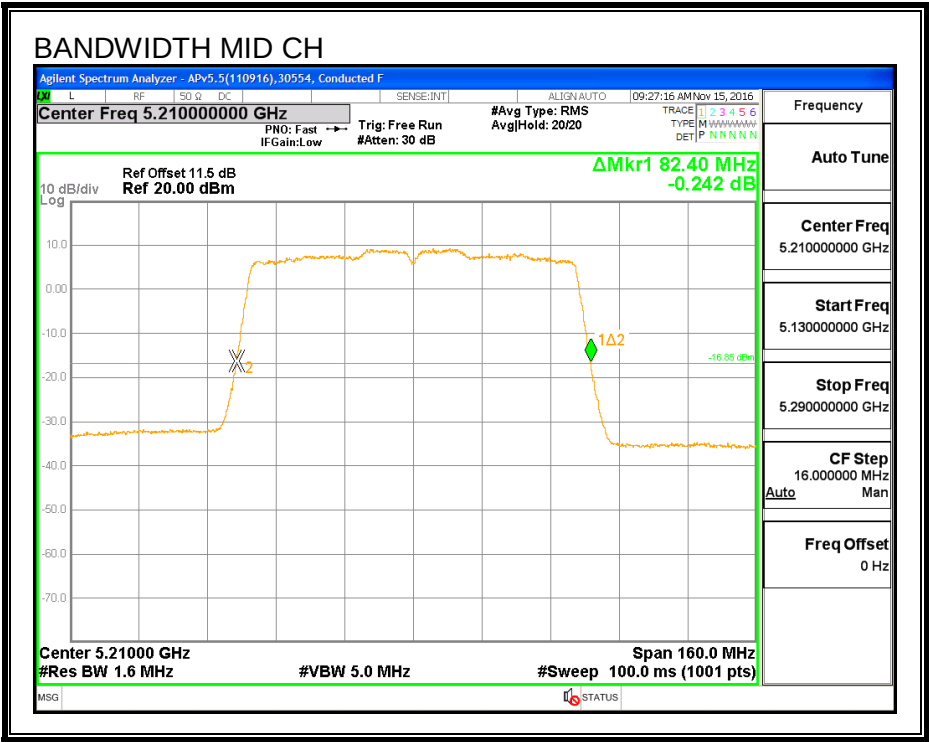

8.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.779

99% BANDWIDTH

