

Report on the FCC and IC Testing of:

Apple Inc, Model: A2141

In accordance with FCC 47 CFR Part 15E,
ISED RSS-247 and ISED RSS-GEN

Prepared for: Apple Inc.
One Apple Park Way
Cupertino, California 95014, USA

FCC ID: BCGA2141

IC: 579C-A2141



Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document Number: 75946284-13 | Issue: 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Simon Bennett	Manager (Innovation & Service Dev)	Authorised Signatory	24 October 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Philip Harrison	24 October 2019	
Testing	Daniel Bishop	24 October 2019	
Testing	Malik Mohammad	24 October 2019	
Testing	Cristian Onaca	24 October 2019	
Testing	Faisal Malyar	24 October 2019	
Testing	Ahmad Javid	24 October 2019	
Testing	Jay Balendrarajah	24 October 2019	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation

IC12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2018, ISED RSS-247: Issue 2 (2017-02) and ISED RSS-GEN: Issue 5 A1 (2019-03) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2019 TÜV SÜD.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	8
1.6	EUT Modification Record	8
1.7	Test Location	9
2	Test Details	10
2.1	Maximum Conducted Output Power	10
2.2	Maximum Conducted Power Spectral Density.....	65
2.3	Emission Bandwidth	116
2.4	Authorised Band Edges	665
2.5	Spurious Radiated Emissions	757
2.6	Restricted Band Edges.....	790
2.7	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	874
3	Measurement Uncertainty	881



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	24 October 2019

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2141
Serial Number(s)	C02YT00GL51N, C02YT008L513 & C02YT007L513
Hardware Version(s)	REV 1.0
Software Version(s)	19A497, 19A507
Number of Samples Tested	3
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2018 ISED RSS-247: Issue 2 (2017-02) ISED RSS-GEN: Issue 5 A1: (2019-03)
Start of Test	28-June-2019
Finish of Test	30-Sept-2019
Name of Engineer(s)	Malik Mohammad, Cristian Onaca, Jay Balendrarajah, Ahmad Javid, Faisal Malyar, Philip Harrison, Daniel Bishop
Related Document(s)	ANSI C63.10 (2013) KDB 662911 D01 v02r01 KDB 905462 D02 v02



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E, ISEDC RSS-247 and ISEDC RSS-GEN are shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15E	RSS-247	RSS-GEN			
Configuration and Mode: 802.11 a/n/ac						
2.1	15.407 (a)	6.2	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2013), KDB 662911 D01
2.2	15.407 (a)	6.2	6.12	Maximum Conducted Power Spectral Density	Pass	ANSI C63.10 (2013), KDB 662911 D01
2.3	15.407 (a)(e)	6.2	6.7	Emission Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.407 (b)	6.2	-	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.407 (b) and 15.205	6.2	6.13	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013)
2.6	15.205	-	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.7	15.407(h)(2)(iii)(iv)	6.3.2 (c)(d)(e)	-	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Pass	KDB 905462 D02

Table 2



1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Laptop computer, with Bluetooth, Bluetooth Low Energy and 802.11 a/b/g/n/ac capabilities in the 2.4 GHz and 5 GHz bands.

The EUT featured an IEEE 802.11 main WLAN radio with up to 3x3 MIMO operation (cores 0, 1 & 2), a Bluetooth radio (sharing the 2nd antenna with main core 1), and an Auxiliary IEEE 802.11 SISO radio (sharing the 3rd antenna with main core 2).



1.4.2 Test Modes

The EUT's main radio supports SISO, 2x2 MIMO and 3x3 MIMO. The Auxillary radio supports only SISO modes. Main and Aux radios are limited to transmitting only one-at-a-time in the 5 GHz bands (the other only operating simultaneously in the 2.4 GHz band). They cannot both transmit in the same 5 GHz band or across multiple 5 GHz bands simultaneously, hence no conformity tests apply for both radios simultaneously transmitting at 5 GHz as a non-contiguous combined pair. Both radios support 802.11a, n and ac modes at 20 MHz, 40 MHz, and 80 MHz channel bandwidths.

The EUT uses different output powers per core dependent on how many cores are used. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM), and transmit beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differs.

US and CA country codes changed the power table for U-NII band 1. Therefore U-NII-1 channels were tested to both power settings for each country's respective limits.

After preliminary investigations were performed, the EUT was therefore tested in the following worst-case modes:

- Main SISO Modes (Core 0 for U-NII-1 / 2A / 2C / 3):
 - 802.11a
 - 802.11n HT20
 - 802.11n HT40
 - 802.11ac VHT80
- Main 2x2 MIMO Modes (Core 0+1 for U-NII-1 / 2A / 2C / 3):
 - 802.11n/ac (V)HT20* - CDD, SDM and TxBF
 - 802.11n/ac (V)HT40* - CDD, SDM and TxBF
 - 802.11ac VHT80 - CDD, SDM and TxBF
- Main 3x3 MIMO Modes (Core 0+1+2 for U-NII-1 / 2A / 2C / 3):
 - 802.11n/ac (V)HT20* - CDD, SDM and TxBF
 - 802.11n/ac (V)HT40* - CDD, SDM and TxBF
 - 802.11ac VHT80 - CDD, SDM and TxBF
- AUX Modes (SISO only on Core 2 for U-NII-1 / 2A / 2C / 3):
 - 802.11a
 - 802.11n HT20
 - 802.11n HT40
 - 802.11ac VHT80

* = 802.11n HT modes were used for CDD and SDM and 802.11ac VHT modes were used for TxBF modes.



1.4.3 Test Set-up

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For transmit beamforming (TxBF) modes the EUT was set up communicating with a support notebook computer provided by the applicant, configured with custom commands to act as an access point. The test laptop was also set to a low output power (approximately 0 dBm) so in conjunction with the rest of the set-up configuration, would give negligible power at the measuring equipment and would not affect the test result. The support laptop's test network set the channel and bandwidth to which the EUT could connect. The EUT then set up a communications link to the support laptop, operating in normal communications mode but with beamforming modes forced on, with auto rate and TPC disabled via terminal commands so the EUT could be limited to worst-case modes. The EUT transmit duty cycle was then maximized by using iPerf bandwidth testing software to keep the transmit output buffer full and generate more traffic from the EUT to the support laptop than the link could sustain. The EUT therefore could fully operate its beamforming mode but with strictly controlled test parameters.

For all other testing except DFS the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands via a script running in the EUT's terminal application. The EUT then transmitted the required type of packetized 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

For DFS testing the EUT was connected to a test access point as shown in section 2.7. The iPerf data throughput test application was ran from the terminal to send UDP data packets from the master (access point) to the slave (EUT). The iPerf throughput rate was then adjusted to give >17 % channel loading for each test mode and operating bandwidth.



1.4.4 Antenna Gain Table

Core 0

Frequency (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
5150 – 5250	6.20	1.5
5250 – 5350	6.30	1.5
5470 – 5725	6.20	1.6
5725 – 5850	5.10	1.6

Table 3

Core 1

Frequency (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
5150 – 5250	2.8	1.5
5250 – 5350	3.2	1.5
5470 – 5725	3.3	1.6
5725 – 5850	3.3	1.6

Table 4

Core 2 / Aux

Frequency (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
5150 – 5250	2.8	1.5
5250 – 5350	3.0	1.5
5470 – 5725	2.3	1.6
5725 – 5850	2.3	1.6

Table 5



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: C02YT00GL51N			
0	0	0	0
Serial Number: C02YT008L513			
0	0	0	0
Serial Number: C02YT007L513			
0	0	0	0

Table 6



1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: (All modes and Configurations)		
Maximum Conducted Output Power	Philip Harrison	UKAS
Maximum Conducted Power Spectral Density	Philip Harrison	UKAS
Emission Bandwidth	Philip Harrison	UKAS
Authorised Band Edges	Malik Mohammad, Cristian Onaca, Jay Balendrarajah, Ahmad Javid, Faisal Malyar	UKAS
Spurious Radiated Emissions	Malik Mohammad, Cristian Onaca, Jay Balendrarajah, Ahmad Javid, Faisal Malyar	UKAS
Restricted Band Edges	Malik Mohammad, Cristian Onaca, Jay Balendrarajah, Ahmad Javid, Faisal Malyar	UKAS
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Daniel Bishop	UKAS

Table 7

Office Address:

Octagon House
Concorde Way
Segensworth North
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 Maximum Conducted Output Power

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2
ISED RSS-GEN, Clause 6.12

2.1.2 Equipment Under Test and Modification State

A2141, S/N: C02YT007L513 - Modification State 0

2.1.3 Date of Test

15 August 2019 to 26 September 2019

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.3.3.2 and KDB 789033 D02 using method PM-G.

Since the gated power meter was used for method PM-G the EUT was measured only while transmitting and hence no duty cycle correction was necessary.

MIMO output port summing was performed in accordance with KDB 662911 D01.

The EUT has equal conducted powers on all ports for each mode of operation, but unequal antenna gains. Therefore, for SISO and 2x2 MIMO modes the EUT was tested on the ports with the highest antenna gain combinations which would result in the highest EIRP output power.

MIMO output port summing was performed in accordance with KDB 662911 D01:

- For the CDD results the Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.
- For SDM modes Directional Gain was calculated in accordance with clause F)2)d)(ii).
- For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

The 'straddle' channels which operate across the U-NII band 2C and 3 boundaries are reported by comparing the total output power to the stricter U-NII-2A band limits.

2.1.5 Environmental Conditions

Ambient Temperature	19.3 - 26.1°C
Relative Humidity	39.0 - 67.9%



2.1.6 Test Results: U-NII-1

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
Conducted Power (dBm)	13.35	13.40	13.48

Table 8 - 802.11a / 6 Mbps / SISO / Core 0 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power (dBm)	13.38	13.39	13.33
Antenna Directional Gain (dBi)	6.20	6.20	6.20
RSS-247 EIRP Power Limit (dBm)	22.22	22.22	22.22
Total EIRP (dBm)	19.58	19.59	19.53

Table 9 - 802.11a / 6 Mbps / SISO / Core 0 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Antenna Directional Gain (dBi)	2.80	2.80	2.80
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
Conducted Power (dBm)	13.46	13.46	13.23

Table 10 - 802.11a / 6 Mbps / Aux Core / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power (dBm)	13.28	13.49	13.36
Antenna Directional Gain (dBi)	2.80	2.80	2.80
RSS-247 EIRP Power Limit (dBm)	22.23	22.23	22.22
Total EIRP (dBm)	16.08	16.29	16.16

Table 11 - 802.11a / 6 Mbps / Aux Core / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
Conducted Power (dBm)	13.45	13.27	13.47

Table 12 - 802.11n / HT20 MCS0 / SISO / Core 0 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power (dBm)	13.33	13.25	13.48
Antenna Directional Gain (dBi)	6.20	6.20	6.20
RSS-247 EIRP Power Limit (dBm)	22.51	22.51	22.52
Total EIRP (dBm)	19.53	19.45	19.68

Table 13 - 802.11n / HT20 MCS0 / SISO / Core 0 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	13.48	13.42	13.21
Conducted Power Core 1 (dBm)	13.18	13.50	13.25
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
Total Conducted Power (dBm)	16.35	16.47	16.24

Table 14 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	8.79	8.78	8.72
Conducted Power Core 1 (dBm)	8.82	8.77	8.82
Total Conducted Power (dBm)	11.82	11.79	11.78
Antenna Directional Gain (dBi)	6.20	6.20	6.20
RSS-247 EIRP Power Limit (dBm)	22.53	22.52	22.51
Total EIRP (dBm)	18.02	17.99	17.98

Table 15 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	13.28	13.28	13.40
Conducted Power Core 1 (dBm)	13.28	13.26	13.23
Antenna Directional Gain (dBi)	4.82	4.82	4.82
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	16.29	16.28	16.33

Table 16 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	11.75	11.90	11.80
Conducted Power Core 1 (dBm)	11.66	11.91	11.70
Total Conducted Power (dBm)	14.72	14.92	14.76
Antenna Directional Gain (dBi)	4.82	4.82	4.82
RSS-247 EIRP Power Limit (dBm)	22.51	22.52	22.51
Total EIRP (dBm)	19.54	19.74	19.59

Table 17 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	13.29	13.22	13.39
Conducted Power Core 1 (dBm)	13.38	13.40	13.45
Antenna Directional Gain (dBi)	7.68	7.68	7.68
15.407 Conducted Power Limit (dBm)	22.32	22.32	22.32
Total Conducted Power (dBm)	16.35	16.32	16.43

Table 18 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	8.98	8.79	8.18
Conducted Power Core 1 (dBm)	8.91	8.96	8.95
Total Conducted Power (dBm)	11.95	11.89	11.59
Antenna Directional Gain (dBi)	7.68	7.68	7.68
RSS-247 EIRP Power Limit (dBm)	22.51	22.52	22.52
Total EIRP (dBm)	19.63	19.56	19.27

Table 19 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	10.66	13.26	13.24
Conducted Power Core 1 (dBm)	10.88	13.53	13.42
Conducted Power Core 2 (dBm)	10.80	13.32	13.31
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
Total Conducted Power (dBm)	15.55	18.14	18.10

Table 20 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	5.76	5.95	5.65
Conducted Power Core 1 (dBm)	6.01	5.86	5.83
Conducted Power Core 2 (dBm)	5.94	5.84	5.73
Total Conducted Power (dBm)	10.68	10.65	10.51
Antenna Directional Gain (dBi)	6.20	6.20	6.20
Total EIRP (dBm)	16.88	16.85	16.71
RSS-247 EIRP Power Limit (dBm)	22.52	22.52	22.52

Table 21 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	12.69	13.32	13.36
Conducted Power Core 1 (dBm)	12.98	13.21	13.25
Conducted Power Core 2 (dBm)	12.80	13.30	13.35
Antenna Directional Gain (dBi)	4.25	4.25	4.25
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	17.60	18.05	18.09

Table 22 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code US



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	10.90	10.86	10.94
Conducted Power Core 1 (dBm)	10.80	10.89	10.81
Conducted Power Core 2 (dBm)	10.67	10.87	10.83
Total Conducted Power (dBm)	15.56	15.65	15.63
Antenna Directional Gain (dBi)	4.25	4.25	4.25
Total EIRP (dBm)	19.81	19.89	19.88
RSS-247 EIRP Power Limit (dBm)	22.51	22.51	22.51

Table 23 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Antenna Directional Gain (dBi)	2.80	2.80	2.80
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
Conducted Power (dBm)	13.32	13.20	13.43

Table 24 - 802.11n / HT20 MCS0 / Aux Core / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power (dBm)	13.23	13.29	13.42
Antenna Directional Gain (dBi)	2.80	2.80	2.80
RSS-247 EIRP Power Limit (dBm)	22.53	22.52	22.52
Total EIRP (dBm)	16.03	16.09	16.22

Table 25 - 802.11n / HT20 MCS0 / Aux Core / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Antenna Directional Gain (dBi)	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80
Conducted Power (dBm)	13.33	13.22

Table 26 - 802.11n / HT40 MCS0 / SISO / Core 0 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power (dBm)	13.25	13.50
Antenna Directional Gain (dBi)	6.20	6.20
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	19.45	19.70

Table 27 - 802.11n / HT40 MCS0 / SISO / Core 0 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	12.82	13.40
Conducted Power Core 1 (dBm)	12.94	13.41
Antenna Directional Gain (dBi)	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80
Total Conducted Power (dBm)	15.89	16.42

Table 28 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	11.76	11.83
Conducted Power Core 1 (dBm)	11.74	11.89
Total Conducted Power (dBm)	14.76	14.87
Antenna Directional Gain (dBi)	6.20	6.20
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	20.96	21.07

Table 29 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	12.68	13.33
Conducted Power Core 1 (dBm)	12.94	13.22
Antenna Directional Gain (dBi)	4.82	4.82
15.407 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	15.82	16.29

Table 30 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	12.96	13.27
Conducted Power Core 1 (dBm)	12.98	13.44
Total Conducted Power (dBm)	15.98	16.37
Antenna Directional Gain (dBi)	4.82	4.82
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	20.81	21.19

Table 31 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	11.81	13.35
Conducted Power Core 1 (dBm)	11.90	13.38
Antenna Directional Gain (dBi)	7.68	7.68
15.407 Conducted Power Limit (dBm)	22.32	22.32
Total Conducted Power (dBm)	14.87	16.38

Table 32 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	10.91	10.98
Conducted Power Core 1 (dBm)	11.17	11.07
Total Conducted Power (dBm)	14.05	14.03
Antenna Directional Gain (dBi)	7.68	7.68
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	21.73	21.71

Table 33 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1 / Country Code CA



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	10.84	13.45
Conducted Power Core 1 (dBm)	10.92	13.36
Conducted Power Core 2 (dBm)	10.68	13.30
Antenna Directional Gain (dBi)	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80
Total Conducted Power (dBm)	15.58	18.14

Table 34 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	8.97	8.80
Conducted Power Core 1 (dBm)	8.81	8.66
Conducted Power Core 2 (dBm)	8.72	8.80
Total Conducted Power (dBm)	13.61	13.53
Antenna Directional Gain (dBi)	6.20	6.20
Total EIRP (dBm)	19.81	19.73
RSS-247 EIRP Power Limit (dBm)	23.00	23.00

Table 35 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	11.72	13.41
Conducted Power Core 1 (dBm)	11.77	13.45
Conducted Power Core 2 (dBm)	12.03	13.47
Antenna Directional Gain (dBi)	4.25	4.25
15.407 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	16.61	18.22

Table 36 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	11.77	12.67
Conducted Power Core 1 (dBm)	11.76	12.89
Conducted Power Core 2 (dBm)	12.05	12.96
Total Conducted Power (dBm)	16.63	17.61
Antenna Directional Gain (dBi)	4.25	4.25
Total EIRP (dBm)	20.88	21.86
RSS-247 EIRP Power Limit (dBm)	23.00	23.00

Table 37 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Antenna Directional Gain (dBi)	2.80	2.80
15.407 Conducted Power Limit (dBm)	24.00	24.00
Conducted Power (dBm)	13.31	13.36

Table 38 - 802.11n / HT40 MCS0 / Aux Core / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power (dBm)	13.24	13.24
Antenna Directional Gain (dBi)	2.80	2.80
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	16.04	16.04

Table 39 - 802.11n / HT40 MCS0 / Aux Core / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	13.28	13.18	13.30
Conducted Power Core 1 (dBm)	13.49	13.30	13.22
Antenna Directional Gain (dBi)	7.68	7.68	7.68
15.407 Conducted Power Limit (dBm)	22.32	22.32	22.32
Total Conducted Power (dBm)	16.40	16.25	16.27

Table 40 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	8.91	8.80	8.96
Conducted Power Core 1 (dBm)	8.75	8.70	8.99
Total Conducted Power (dBm)	11.84	11.76	11.99
Antenna Directional Gain (dBi)	7.68	7.68	7.68
RSS-247 EIRP Power Limit (dBm)	22.43	22.43	22.50
Total EIRP (dBm)	19.52	19.44	19.66

Table 41 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	10.68	13.48	13.16
Conducted Power Core 1 (dBm)	10.93	13.43	13.49
Conducted Power Core 2 (dBm)	10.91	13.32	13.26
Antenna Directional Gain (dBi)	8.86	8.86	8.86
15.407 Conducted Power Limit (dBm)	21.14	21.14	21.14
Total Conducted Power (dBm)	15.61	18.18	18.08

Table 42 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted Power Core 0 (dBm)	3.70	6.14	5.86
Conducted Power Core 1 (dBm)	4.19	4.00	4.38
Conducted Power Core 2 (dBm)	4.12	3.57	5.84
Total Conducted Power (dBm)	8.78	9.49	10.19
Antenna Directional Gain (dBi)	8.86	8.86	8.86
Total EIRP (dBm)	17.64	18.35	19.04
RSS-247 EIRP Power Limit (dBm)	22.44	22.44	22.44

Table 43 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	11.42	13.41
Conducted Power Core 1 (dBm)	11.76	13.22
Antenna Directional Gain (dBi)	7.68	7.68
15.407 Conducted Power Limit (dBm)	22.32	22.32
Total Conducted Power (dBm)	14.60	16.33

Table 44 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	10.85	10.92
Conducted Power Core 1 (dBm)	11.10	11.04
Total Conducted Power (dBm)	13.99	13.99
Antenna Directional Gain (dBi)	7.68	7.68
RSS-247 EIRP Power Limit (dBm)	23.00	23.00
Total EIRP (dBm)	21.66	21.67

Table 45 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	10.02	13.30
Conducted Power Core 1 (dBm)	9.94	13.28
Conducted Power Core 2 (dBm)	9.99	13.32
Antenna Directional Gain (dBi)	8.86	8.86
15.407 Conducted Power Limit (dBm)	21.14	21.14
Total Conducted Power (dBm)	14.76	18.07

Table 46 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted Power Core 0 (dBm)	8.02	8.08
Conducted Power Core 1 (dBm)	8.16	8.16
Conducted Power Core 2 (dBm)	8.06	8.10
Total Conducted Power (dBm)	12.85	12.88
Antenna Directional Gain (dBi)	8.86	8.86
Total EIRP (dBm)	21.71	21.74
RSS-247 EIRP Power Limit (dBm)	23.00	23.00

Table 47 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Antenna Directional Gain (dBi)	6.20
15.407 Conducted Power Limit (dBm)	23.80
Conducted Power (dBm)	12.89

Table 48 - 802.11ac / VHT80 MCS0x1 / SISO / Core 0 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted Power (dBm)	12.94
Antenna Directional Gain (dBi)	6.20
RSS-247 EIRP Power Limit (dBm)	23.00
Total EIRP (dBm)	19.14

Table 49 - 802.11ac / VHT80 MCS0x1 / SISO / Core 0 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	11.76
Conducted Power Core 1 (dBm)	11.70
Antenna Directional Gain (dBi)	6.20
15.407 Conducted Power Limit (dBm)	23.80
Total Conducted Power (dBm)	14.74

Table 50 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	11.78
Conducted Power Core 1 (dBm)	11.82
Total Conducted Power (dBm)	14.81
Antenna Directional Gain (dBi)	6.20
RSS-247 EIRP Power Limit (dBm)	23.00
Total EIRP (dBm)	21.01

Table 51 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	12.21
Conducted Power Core 1 (dBm)	12.54
Antenna Directional Gain (dBi)	4.82
15.407 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	15.39

Table 52 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	12.22
Conducted Power Core 1 (dBm)	12.16
Total Conducted Power (dBm)	15.20
Antenna Directional Gain (dBi)	4.82
RSS-247 EIRP Power Limit (dBm)	23.00
Total EIRP (dBm)	20.02

Table 53 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	10.74
Conducted Power Core 1 (dBm)	10.91
Antenna Directional Gain (dBi)	7.68
15.407 Conducted Power Limit (dBm)	22.32
Total Conducted Power (dBm)	13.84

Table 54 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	9.86
Conducted Power Core 1 (dBm)	9.76
Total Conducted Power (dBm)	12.82
Antenna Directional Gain (dBi)	7.68
RSS-247 EIRP Power Limit (dBm)	23.00
Total EIRP (dBm)	20.50

Table 55 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	9.97
Conducted Power Core 1 (dBm)	9.82
Conducted Power Core 2 (dBm)	9.88
Antenna Directional Gain (dBi)	6.20
15.407 Conducted Power Limit (dBm)	23.80
Total Conducted Power (dBm)	14.66

Table 56 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	9.98
Conducted Power Core 1 (dBm)	9.89
Conducted Power Core 2 (dBm)	9.85
Total Conducted Power (dBm)	14.68
Antenna Directional Gain (dBi)	6.20
Total EIRP (dBm)	20.88
RSS-247 EIRP Power Limit (dBm)	23.00

Table 57 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2 / Country Code CA



Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	10.44
Conducted Power Core 1 (dBm)	10.34
Conducted Power Core 2 (dBm)	10.18
Antenna Directional Gain (dBi)	4.25
15.407 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	15.09

Table 58 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	10.55
Conducted Power Core 1 (dBm)	10.42
Conducted Power Core 2 (dBm)	10.48
Total Conducted Power (dBm)	15.25
Antenna Directional Gain (dBi)	4.25
Total EIRP (dBm)	19.50
RSS-247 EIRP Power Limit (dBm)	23.00

Table 59 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	8.74
Conducted Power Core 1 (dBm)	8.83
Conducted Power Core 2 (dBm)	8.84
Antenna Directional Gain (dBi)	8.86
15.407 Conducted Power Limit (dBm)	21.14
Total Conducted Power (dBm)	13.57

Table 60 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Conducted Power Core 0 (dBm)	8.17
Conducted Power Core 1 (dBm)	8.23
Conducted Power Core 2 (dBm)	7.96
Total Conducted Power (dBm)	12.89
Antenna Directional Gain (dBi)	8.86
Total EIRP (dBm)	21.75
RSS-247 EIRP Power Limit (dBm)	23.00

Table 61 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Antenna Directional Gain (dBi)	2.80
15.407 Conducted Power Limit (dBm)	24.00
Conducted Power (dBm)	12.79

Table 62 - 802.11ac / VHT80 MCS0x1 / Aux Core / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted Power (dBm)	12.92
Antenna Directional Gain (dBi)	2.80
RSS-247 EIRP Power Limit (dBm)	23.00
Total EIRP (dBm)	15.72

Table 63 - 802.11ac / VHT80 MCS0x1 / Aux Core / Country Code CA



2.1.7 Test Results: U-NII-2A

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	23.23	23.23	23.23
Conducted Power (dBm)	12.78	12.73	12.98
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.23	29.23	29.23
EIRP Power (dBm)	19.08	19.03	19.28

Table 64 - 802.11a / 6 Mbps / SISO / Core 0

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Antenna Directional Gain (dBi)	3.00	3.00	3.00
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	23.24	23.23	23.23
Conducted Power (dBm)	12.99	12.98	12.81
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.24	29.23	29.23
EIRP Power (dBm)	15.99	15.98	15.81

Table 65 - 802.11a / 6 Mbps / Aux Core

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	23.52	23.52	23.51
Conducted Power (dBm)	13.00	12.90	12.87
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.52	29.52	29.51
EIRP Power (dBm)	19.30	19.20	19.17

Table 66 - 802.11n / HT20 MCS0 / SISO / Core 0



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.75	12.74	12.77
Conducted Power Core 1 (dBm)	12.88	12.72	12.78
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51
Total Conducted Power (dBm)	15.83	15.74	15.78
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51
EIRP Power (dBm)	22.13	22.04	22.08

Table 67 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.95	12.93	12.74
Conducted Power Core 1 (dBm)	12.94	12.69	12.78
Antenna Directional Gain (dBi)	5.02	5.02	5.02
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	23.52	23.51	23.51
Total Conducted Power (dBm)	15.95	15.82	15.77
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.52	29.51	29.51
EIRP Power (dBm)	20.97	20.84	20.79

Table 68 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.93	12.99	12.91
Conducted Power Core 1 (dBm)	12.73	12.94	12.86
Antenna Directional Gain (dBi)	7.90	7.90	7.90
15.407 Conducted Power Limit (dBm)	22.10	22.10	22.10
RSS-247 Conducted Power Limit (dBm)	23.52	23.52	23.52
Total Conducted Power (dBm)	15.84	15.97	15.89
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.52	29.52	29.52
EIRP Power (dBm)	23.74	23.87	23.79

Table 69 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.76	12.88	10.91
Conducted Power Core 1 (dBm)	12.96	12.77	10.83
Conducted Power Core 2 (dBm)	12.68	12.79	10.93
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51
Total Conducted Power (dBm)	17.57	17.58	15.66
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51
EIRP Power (dBm)	23.87	23.88	21.96

Table 70 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.67	12.89	12.29
Conducted Power Core 1 (dBm)	12.80	12.68	12.43
Conducted Power Core 2 (dBm)	12.93	12.69	12.37
Antenna Directional Gain (dBi)	4.45	4.45	4.45
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	23.51	23.52	23.52
Total Conducted Power (dBm)	17.57	17.52	17.13
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.51	29.52	29.52
EIRP Power (dBm)	22.02	21.97	21.58

Table 71 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Antenna Directional Gain (dBi)	3.00	3.00	3.00
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	23.53	23.52	23.53
Conducted Power (dBm)	12.79	12.98	12.87
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.53	29.52	29.53
EIRP Power (dBm)	15.79	15.98	15.87

Table 72 - 802.11n / HT20 MCS0 / Aux Core



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Antenna Directional Gain (dBi)	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Conducted Power (dBm)	12.72	12.82
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	19.02	19.12

Table 73 - 802.11n / HT40 MCS0 / SISO / Core 0

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.73	12.19
Conducted Power Core 1 (dBm)	12.90	12.35
Antenna Directional Gain (dBi)	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	15.83	15.28
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	22.13	21.58

Table 74 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.92	12.87
Conducted Power Core 1 (dBm)	12.85	12.81
Antenna Directional Gain (dBi)	5.02	5.02
15.407 Conducted Power Limit (dBm)	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	15.89	15.85
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	20.92	20.87

Table 75 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.86	11.91
Conducted Power Core 1 (dBm)	12.72	11.90
Antenna Directional Gain (dBi)	7.90	7.90
15.407 Conducted Power Limit (dBm)	22.10	22.10
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	15.80	14.91
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	23.70	22.81

Table 76 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.80	10.95
Conducted Power Core 1 (dBm)	12.91	10.96
Conducted Power Core 2 (dBm)	12.85	10.86
Antenna Directional Gain (dBi)	6.30	6.30
15.407 Conducted Power Limit (dBm)	23.70	23.70
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	17.62	15.70
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	23.92	22.00

Table 77 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.75	12.44
Conducted Power Core 1 (dBm)	12.83	12.27
Conducted Power Core 2 (dBm)	12.86	12.21
Antenna Directional Gain (dBi)	4.45	4.45
15.407 Conducted Power Limit (dBm)	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	17.59	17.08
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	22.03	21.53

Table 78 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Antenna Directional Gain (dBi)	3.00	3.00
15.407 Conducted Power Limit (dBm)	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Conducted Power (dBm)	12.86	12.94
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	15.86	15.94

Table 79 - 802.11n / HT40 MCS0 / Aux Core

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.72	12.95	13.02
Conducted Power Core 1 (dBm)	12.94	12.72	13.27
Antenna Directional Gain (dBi)	7.90	7.90	7.90
15.407 Conducted Power Limit (dBm)	22.10	22.10	22.10
RSS-247 Conducted Power Limit (dBm)	23.43	23.44	23.43
Total Conducted Power (dBm)	15.84	15.84	16.16
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.43	29.44	29.43
EIRP Power (dBm)	23.74	23.74	24.06

Table 80 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted Power Core 0 (dBm)	12.91	13.28	9.46
Conducted Power Core 1 (dBm)	12.96	12.85	9.91
Conducted Power Core 2 (dBm)	12.80	12.89	9.98
Antenna Directional Gain (dBi)	9.07	9.07	9.07
15.407 Conducted Power Limit (dBm)	20.93	20.93	20.93
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51
Total Conducted Power (dBm)	17.66	17.78	14.56
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51
EIRP Power (dBm)	26.74	26.85	23.63

Table 81 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.81	11.94
Conducted Power Core 1 (dBm)	12.82	11.72
Antenna Directional Gain (dBi)	7.90	7.90
15.407 Conducted Power Limit (dBm)	22.10	22.10
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	15.82	14.84
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	23.72	22.74

Table 82 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted Power Core 0 (dBm)	12.92	9.79
Conducted Power Core 1 (dBm)	12.75	9.84
Conducted Power Core 2 (dBm)	12.74	9.94
Antenna Directional Gain (dBi)	9.07	9.07
15.407 Conducted Power Limit (dBm)	20.93	20.93
RSS-247 Conducted Power Limit (dBm)	24.00	24.00
Total Conducted Power (dBm)	17.57	14.63
15.407 TPC EIRP Limit (dBm)	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00
EIRP Power (dBm)	26.65	23.70

Table 83 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Antenna Directional Gain (dBi)	6.30
15.407 Conducted Power Limit (dBm)	23.70
RSS-247 Conducted Power Limit (dBm)	24.00
Conducted Power (dBm)	12.85
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	19.15

Table 84 - 802.11ac / VHT80 MCS0x1 / SISO / Core 0

Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	11.90
Conducted Power Core 1 (dBm)	11.88
Antenna Directional Gain (dBi)	6.30
15.407 Conducted Power Limit (dBm)	23.70
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	14.90
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	21.20

Table 85 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	12.98
Conducted Power Core 1 (dBm)	12.85
Antenna Directional Gain (dBi)	5.02
15.407 Conducted Power Limit (dBm)	24.00
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	15.92
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	20.94

Table 86 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	10.99
Conducted Power Core 1 (dBm)	10.78
Antenna Directional Gain (dBi)	7.90
15.407 Conducted Power Limit (dBm)	22.10
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	13.90
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	21.80

Table 87 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	10.48
Conducted Power Core 1 (dBm)	10.20
Conducted Power Core 2 (dBm)	10.36
Antenna Directional Gain (dBi)	6.30
15.407 Conducted Power Limit (dBm)	23.70
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	15.12
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	21.42

Table 88 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	10.77
Conducted Power Core 1 (dBm)	10.95
Conducted Power Core 2 (dBm)	10.95
Antenna Directional Gain (dBi)	4.45
15.407 Conducted Power Limit (dBm)	24.00
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	15.66
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	20.11

Table 89 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2



Channel	Middle
Frequency (MHz)	5290
Conducted Power Core 0 (dBm)	9.75
Conducted Power Core 1 (dBm)	9.92
Conducted Power Core 2 (dBm)	9.85
Antenna Directional Gain (dBi)	9.07
15.407 Conducted Power Limit (dBm)	20.93
RSS-247 Conducted Power Limit (dBm)	24.00
Total Conducted Power (dBm)	14.61
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	23.69

Table 90 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Antenna Directional Gain (dBi)	3.00
15.407 Conducted Power Limit (dBm)	24.00
RSS-247 Conducted Power Limit (dBm)	24.00
Conducted Power (dBm)	12.72
15.407 TPC EIRP Limit (dBm)	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00
EIRP Power (dBm)	15.72

Table 91 - 802.11ac / VHT80 MCS0x1 / Aux Core



2.1.8 Test Results: U-NII-2C

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	22.82
RSS-247 Conducted Power Limit (dBm)	23.22	23.23	23.22	23.22
Conducted Power (dBm)	12.34	12.46	12.27	12.24
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.02
RSS-247 TPC EIRP Limit (dBm)	29.22	29.23	29.22	29.22
EIRP Power (dBm)	18.54	18.66	18.47	18.44

Table 92 - 802.11a / 6 Mbps / SISO / Core 0

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	22.99
RSS-247 Conducted Power Limit (dBm)	23.22	23.23	23.23	23.23
Conducted Power (dBm)	12.32	12.40	12.22	12.41
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	28.99
RSS-247 TPC EIRP Limit (dBm)	29.22	29.23	29.23	29.23
EIRP Power (dBm)	14.62	14.70	14.52	14.71

Table 93 - 802.11a / 6 Mbps / Aux Core

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	22.84
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51	23.51
Conducted Power (dBm)	12.46	12.35	12.32	12.17
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.04
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51	29.51
EIRP Power (dBm)	18.66	18.55	18.52	18.37

Table 94 - 802.11n / HT20 MCS0 / SISO / Core 0



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.20	12.16	12.52	12.35
Conducted Power Core 1 (dBm)	12.32	12.45	12.23	12.22
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	22.85
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51	23.51
Total Conducted Power (dBm)	15.27	15.32	15.38	15.29
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.05
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51	29.51
EIRP Power (dBm)	21.47	21.52	21.58	21.49

Table 95 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.20	12.22	12.36	12.24
Conducted Power Core 1 (dBm)	12.23	12.43	12.21	12.20
Antenna Directional Gain (dBi)	4.99	4.99	4.99	4.99
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	23.02
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51	23.51
Total Conducted Power (dBm)	15.23	15.34	15.29	15.23
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.02
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51	29.51
EIRP Power (dBm)	20.22	20.33	20.28	20.21

Table 96 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.16	12.45	12.23	12.28
Conducted Power Core 1 (dBm)	12.22	12.30	12.06	12.33
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted Power Limit (dBm)	22.12	22.12	22.12	21.19
RSS-247 Conducted Power Limit (dBm)	23.52	23.43	23.52	23.51
Total Conducted Power (dBm)	15.20	15.39	15.16	15.31
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.07
RSS-247 TPC EIRP Limit (dBm)	29.52	29.43	29.52	29.51
EIRP Power (dBm)	23.09	23.27	23.04	23.19

Table 97 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.23	12.23	12.00	12.18
Conducted Power Core 1 (dBm)	12.35	12.34	11.78	12.53
Conducted Power Core 2 (dBm)	12.17	12.39	11.86	12.30
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	22.85
RSS-247 Conducted Power Limit (dBm)	23.51	23.51	23.51	23.51
Total Conducted Power (dBm)	17.02	17.09	16.65	17.11
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.05
RSS-247 TPC EIRP Limit (dBm)	29.51	29.51	29.51	29.51
EIRP Power (dBm)	23.22	23.29	22.85	23.31

Table 98 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.52	12.41	12.23	12.40
Conducted Power Core 1 (dBm)	12.43	12.21	12.32	12.16
Conducted Power Core 2 (dBm)	12.38	12.41	12.22	12.15
Antenna Directional Gain (dBi)	4.26	4.26	4.26	4.26
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	23.04
RSS-247 Conducted Power Limit (dBm)	23.50	23.51	23.51	23.51
Total Conducted Power (dBm)	17.21	17.12	17.03	17.01
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.04
RSS-247 TPC EIRP Limit (dBm)	29.50	29.51	29.51	29.51
EIRP Power (dBm)	21.47	21.38	21.29	21.27

Table 99 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	23.05
RSS-247 Conducted Power Limit (dBm)	23.53	23.53	23.53	23.52
Conducted Power (dBm)	12.39	12.26	12.32	12.24
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.05
RSS-247 TPC EIRP Limit (dBm)	29.53	29.53	29.53	29.52
EIRP Power (dBm)	14.69	14.56	14.61	14.54

Table 100 - 802.11n / HT20 MCS0 / Aux Core



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Conducted Power (dBm)	12.34	12.27	12.20	12.27
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	18.54	18.47	18.40	18.47

Table 101 - 802.11n / HT40 MCS0 / SISO / Core 0

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	12.23	12.27	12.23	12.23
Conducted Power Core 1 (dBm)	12.28	12.26	12.48	12.21
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	15.26	15.28	15.37	15.23
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	21.46	21.48	21.57	21.43

Table 102 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	12.48	12.39	12.38	12.47
Conducted Power Core 1 (dBm)	12.48	12.27	12.19	12.27
Antenna Directional Gain (dBi)	4.99	4.99	4.99	4.99
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	15.49	15.34	15.30	15.38
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	20.47	20.33	20.29	20.37

Table 103 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	11.68	12.35	12.41	12.36
Conducted Power Core 1 (dBm)	11.94	12.35	12.24	12.29
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted Power Limit (dBm)	22.12	22.12	22.12	22.12
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	14.82	15.36	15.34	15.33
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	22.70	23.24	23.22	23.21

Table 104 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	11.50	12.34	12.41	12.33
Conducted Power Core 1 (dBm)	11.41	12.45	12.46	12.47
Conducted Power Core 2 (dBm)	11.45	12.32	12.45	12.44
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	16.22	17.14	17.21	17.19
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	22.42	23.34	23.41	23.39

Table 105 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	12.18	12.22	12.47	12.35
Conducted Power Core 1 (dBm)	12.44	12.31	12.45	12.46
Conducted Power Core 2 (dBm)	12.48	12.34	12.25	12.44
Antenna Directional Gain (dBi)	4.26	4.26	4.26	4.26
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	17.14	17.06	17.16	17.19
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	21.40	21.33	21.42	21.45

Table 106 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Conducted Power (dBm)	12.20	12.31	12.44	12.50
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	14.50	14.61	14.74	14.80

Table 107 - 802.11n / HT40 MCS0 / Aux Core

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.37	12.30	12.20	12.34
Conducted Power Core 1 (dBm)	12.46	12.26	12.10	12.35
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted Power Limit (dBm)	22.12	22.12	22.12	21.20
RSS-247 Conducted Power Limit (dBm)	23.50	23.43	23.50	23.50
Total Conducted Power (dBm)	15.43	15.29	15.16	15.36
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.08
RSS-247 TPC EIRP Limit (dBm)	29.50	29.43	29.50	29.50
EIRP Power (dBm)	23.31	23.17	23.04	23.24

Table 108 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted Power Core 0 (dBm)	12.35	12.41	10.79	11.96
Conducted Power Core 1 (dBm)	12.43	12.33	10.87	12.18
Conducted Power Core 2 (dBm)	12.37	12.18	10.86	12.35
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted Power Limit (dBm)	21.13	21.13	21.13	20.15
RSS-247 Conducted Power Limit (dBm)	23.50	23.44	23.50	23.50
Total Conducted Power (dBm)	17.16	17.08	15.61	16.94
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	29.02
RSS-247 TPC EIRP Limit (dBm)	29.50	29.44	29.50	29.50
EIRP Power (dBm)	26.02	25.94	24.48	25.81

Table 109 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	12.24	12.24	12.37	12.38
Conducted Power Core 1 (dBm)	11.97	12.28	12.31	12.25
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted Power Limit (dBm)	22.12	22.12	22.12	22.12
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	15.12	15.27	15.35	15.33
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	23.00	23.15	23.23	23.21

Table 110 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted Power Core 0 (dBm)	10.82	12.49	12.42	12.40
Conducted Power Core 1 (dBm)	10.82	12.44	12.46	12.35
Conducted Power Core 2 (dBm)	10.69	12.36	12.32	11.94
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted Power Limit (dBm)	21.13	21.13	21.13	21.13
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00	24.00
Total Conducted Power (dBm)	15.55	17.20	17.17	17.01
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00	30.00
EIRP Power (dBm)	24.41	26.07	26.04	25.87

Table 111 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Conducted Power (dBm)	12.35	12.30	12.26
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	18.55	18.50	18.46

Table 112 - 802.11ac / VHT80 MCS0x1 / SISO / Core 0

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	11.98	12.26	12.50
Conducted Power Core 1 (dBm)	11.84	12.34	12.21
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	14.92	15.31	15.37
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	21.12	21.51	21.57

Table 113 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	12.20	12.47	12.39
Conducted Power Core 1 (dBm)	12.47	12.45	12.48
Antenna Directional Gain (dBi)	4.99	4.99	4.99
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	15.35	15.47	15.45
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	20.34	20.46	20.43

Table 114 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	10.76	12.39	12.40
Conducted Power Core 1 (dBm)	10.73	12.22	12.16
Antenna Directional Gain (dBi)	7.88	7.88	7.88
15.407 Conducted Power Limit (dBm)	22.12	22.12	22.12
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	13.75	15.32	15.29
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	21.64	23.20	23.17

Table 115 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	10.84	12.38	12.33
Conducted Power Core 1 (dBm)	10.82	12.42	12.39
Conducted Power Core 2 (dBm)	10.89	12.41	12.19
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted Power Limit (dBm)	23.80	23.80	23.80
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	15.62	17.18	17.08
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	21.82	23.38	23.28

Table 116 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	11.78	12.31	12.47
Conducted Power Core 1 (dBm)	11.70	12.35	12.16
Conducted Power Core 2 (dBm)	11.87	12.19	12.37
Antenna Directional Gain (dBi)	4.26	4.26	4.26
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	16.55	17.05	17.11
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	20.82	21.32	21.37

Table 117 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2



Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted Power Core 0 (dBm)	9.89	12.47	12.43
Conducted Power Core 1 (dBm)	9.81	12.18	12.52
Conducted Power Core 2 (dBm)	9.82	12.25	12.28
Antenna Directional Gain (dBi)	8.87	8.87	8.87
15.407 Conducted Power Limit (dBm)	21.13	21.13	21.13
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Total Conducted Power (dBm)	14.61	17.07	17.18
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	23.48	25.94	26.05

Table 118 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Antenna Directional Gain (dBi)	2.30	2.30	2.30
15.407 Conducted Power Limit (dBm)	24.00	24.00	24.00
RSS-247 Conducted Power Limit (dBm)	24.00	24.00	24.00
Conducted Power (dBm)	12.25	12.31	12.41
15.407 TPC EIRP Limit (dBm)	30.00	30.00	30.00
RSS-247 TPC EIRP Limit (dBm)	30.00	30.00	30.00
EIRP Power (dBm)	14.55	14.61	14.71

Table 119 - 802.11ac / VHT80 MCS0x1 / Aux Core



2.1.9 Test Results: U-NII-3

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Antenna Directional Gain (dBi)	5.1	5.10	5.10
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Conducted Power (dBm)	12.62	12.56	12.57
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	17.72	17.66	17.67

Table 120 - 802.11a / 6 Mbps / SISO / Core 0

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Antenna Directional Gain (dBi)	2.3	2.30	2.30
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Conducted Power (dBm)	12.71	12.44	12.58
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	15.01	14.74	14.89

Table 121 - 802.11a / 6 Mbps / Aux Core

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Antenna Directional Gain (dBi)	5.1	5.10	5.10
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Conducted Power (dBm)	12.74	12.53	12.68
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	17.84	17.63	17.78

Table 122 - 802.11n / HT20 MCS0 / SISO / Core 0



Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.7	12.62	12.67
Conducted Power Core 1 (dBm)	12.66	12.50	12.62
Antenna Directional Gain (dBi)	5.1	5.10	5.10
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Total Conducted Power (dBm)	15.69	15.57	15.65
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	20.79	20.67	20.75

Table 123 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.47	12.67	12.46
Conducted Power Core 1 (dBm)	12.58	12.52	12.66
Antenna Directional Gain (dBi)	4.29	4.29	4.29
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Total Conducted Power (dBm)	15.54	15.61	15.57
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	19.83	19.90	19.86

Table 124 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.65	12.74	12.49
Conducted Power Core 1 (dBm)	12.66	12.74	12.52
Antenna Directional Gain (dBi)	7.26	7.26	7.26
15.407 Conducted Power Limit (dBm)	28.74	28.74	28.74
RSS-247 Conducted Power Limit (dBm)	28.74	28.74	28.74
Total Conducted Power (dBm)	15.67	15.75	15.51
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	22.92	23.01	22.77

Table 125 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.69	12.48	12.61
Conducted Power Core 1 (dBm)	12.48	12.69	12.45
Conducted Power Core 2 (dBm)	12.67	12.49	12.75
Antenna Directional Gain (dBi)	5.10	5.10	5.10
15.407 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Total Conducted Power (dBm)	17.38	17.33	17.38
15.407 EIRP Limit (dBm)	36.00	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	22.48	22.43	22.48

Table 126 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.48	12.51	12.72
Conducted Power Core 1 (dBm)	12.51	12.73	12.69
Conducted Power Core 2 (dBm)	12.41	12.54	12.70
Antenna Directional Gain (dBi)	3.72	3.72	3.72
15.407 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Total Conducted Power (dBm)	17.24	17.37	17.47
15.407 EIRP Limit (dBm)	36.00	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	20.96	21.09	21.20

Table 127 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Antenna Directional Gain (dBi)	2.3	2.30	2.30
15.407 Conducted Power Limit (dBm)	30	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00	30.00
Conducted Power (dBm)	12.54	12.59	12.64
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	14.84	14.89	14.93

Table 128 - 802.11n / HT20 MCS0 / Aux Core



Channel	Bottom	Top
Frequency (MHz)	5755	5795
Antenna Directional Gain (dBi)	5.1	5.10
15.407 Conducted Power Limit (dBm)	30	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00
Conducted Power (dBm)	12.45	12.52
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	17.55	17.62

Table 129 - 802.11n / HT40 MCS0 / SISO / Core 0

Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.61	12.64
Conducted Power Core 1 (dBm)	12.64	12.73
Antenna Directional Gain (dBi)	5.1	5.10
15.407 Conducted Power Limit (dBm)	30	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00
Total Conducted Power (dBm)	15.63	15.70
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	20.73	20.80

Table 130 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.58	12.68
Conducted Power Core 1 (dBm)	12.7	12.50
Antenna Directional Gain (dBi)	4.29	4.29
15.407 Conducted Power Limit (dBm)	30	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00
Total Conducted Power (dBm)	15.65	15.60
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	19.95	19.89

Table 131 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.62	12.57
Conducted Power Core 1 (dBm)	12.59	12.65
Antenna Directional Gain (dBi)	7.26	7.26
15.407 Conducted Power Limit (dBm)	28.74	28.74
RSS-247 Conducted Power Limit (dBm)	28.74	28.74
Total Conducted Power (dBm)	15.62	15.62
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	22.87	22.88

Table 132 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1

Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.68	12.58
Conducted Power Core 1 (dBm)	12.46	12.62
Conducted Power Core 2 (dBm)	12.62	12.67
Antenna Directional Gain (dBi)	5.10	5.10
15.407 Conducted Power Limit (dBm)	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00
Total Conducted Power (dBm)	17.36	17.40
15.407 EIRP Limit (dBm)	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00
EIRP Power (dBm)	22.46	22.50

Table 133 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2



Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.72	12.54
Conducted Power Core 1 (dBm)	12.55	12.73
Conducted Power Core 2 (dBm)	12.72	12.50
Antenna Directional Gain (dBi)	3.72	3.72
15.407 Conducted Power Limit (dBm)	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00
Total Conducted Power (dBm)	17.43	17.36
15.407 EIRP Limit (dBm)	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00
EIRP Power (dBm)	21.16	21.08

Table 134 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5755	5795
Antenna Directional Gain (dBi)	2.3	2.30
15.407 Conducted Power Limit (dBm)	30	30.00
RSS-247 Conducted Power Limit (dBm)	30	30.00
Conducted Power (dBm)	12.62	12.67
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	14.92	14.97

Table 135 - 802.11n / HT40 MCS0 / Aux Core

Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.02	12.62	12.69
Conducted Power Core 1 (dBm)	12.68	12.62	12.28
Antenna Directional Gain (dBi)	7.26	7.26	7.26
15.407 Conducted Power Limit (dBm)	28.74	28.74	28.74
RSS-247 Conducted Power Limit (dBm)	28.74	28.74	28.74
Total Conducted Power (dBm)	15.37	15.63	15.50
15.407 EIRP Limit (dBm)	36	36.00	36.00
RSS-247 EIRP Limit (dBm)	36	36.00	36.00
EIRP Power (dBm)	22.63	22.89	22.75

Table 136 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5745	5785	5825
Conducted Power Core 0 (dBm)	12.69	12.64	12.70
Conducted Power Core 1 (dBm)	12.63	12.52	12.64
Conducted Power Core 2 (dBm)	12.70	12.66	12.73
Antenna Directional Gain (dBi)	8.42	8.42	8.42
15.407 Conducted Power Limit (dBm)	27.58	27.58	27.58
RSS-247 Conducted Power Limit (dBm)	27.58	27.58	27.58
Total Conducted Power (dBm)	17.45	17.38	17.46
15.407 EIRP Limit (dBm)	36.00	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	25.86	25.80	25.88

Table 137 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.33	12.63
Conducted Power Core 1 (dBm)	12.45	12.55
Antenna Directional Gain (dBi)	7.26	7.26
15.407 Conducted Power Limit (dBm)	28.74	28.74
RSS-247 Conducted Power Limit (dBm)	28.74	28.74
Total Conducted Power (dBm)	15.4	15.60
15.407 EIRP Limit (dBm)	36	36.00
RSS-247 EIRP Limit (dBm)	36	36.00
EIRP Power (dBm)	22.66	22.86

Table 138 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5755	5795
Conducted Power Core 0 (dBm)	12.59	12.77
Conducted Power Core 1 (dBm)	12.52	12.77
Conducted Power Core 2 (dBm)	12.74	12.51
Antenna Directional Gain (dBi)	8.42	8.42
15.407 Conducted Power Limit (dBm)	27.58	27.58
RSS-247 Conducted Power Limit (dBm)	27.58	27.58
Total Conducted Power (dBm)	17.39	17.46
15.407 EIRP Limit (dBm)	36.00	36.00
RSS-247 EIRP Limit (dBm)	36.00	36.00
EIRP Power (dBm)	25.81	25.87

Table 139 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5775
Antenna Directional Gain (dBi)	5.1
15.407 Conducted Power Limit (dBm)	30
RSS-247 Conducted Power Limit (dBm)	30
Conducted Power (dBm)	12.53
15.407 EIRP Limit (dBm)	36
RSS-247 EIRP Limit (dBm)	36
EIRP Power (dBm)	17.63

Table 140 - 802.11ac / VHT80 MCS0x1 / SISO / Core 0

Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.68
Conducted Power Core 1 (dBm)	12.73
Antenna Directional Gain (dBi)	5.1
15.407 Conducted Power Limit (dBm)	30
RSS-247 Conducted Power Limit (dBm)	30
Total Conducted Power (dBm)	15.72
15.407 EIRP Limit (dBm)	36
RSS-247 EIRP Limit (dBm)	36
EIRP Power (dBm)	20.82

Table 141 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.41
Conducted Power Core 1 (dBm)	12.7
Antenna Directional Gain (dBi)	4.29
15.407 Conducted Power Limit (dBm)	30
RSS-247 Conducted Power Limit (dBm)	30
Total Conducted Power (dBm)	15.57
15.407 EIRP Limit (dBm)	36
RSS-247 EIRP Limit (dBm)	36
EIRP Power (dBm)	19.86

Table 142 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.48
Conducted Power Core 1 (dBm)	12.54
Antenna Directional Gain (dBi)	7.26
15.407 Conducted Power Limit (dBm)	28.74
RSS-247 Conducted Power Limit (dBm)	28.74
Total Conducted Power (dBm)	15.52
15.407 EIRP Limit (dBm)	36
RSS-247 EIRP Limit (dBm)	36
EIRP Power (dBm)	22.78

Table 143 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.53
Conducted Power Core 1 (dBm)	12.54
Conducted Power Core 2 (dBm)	12.52
Antenna Directional Gain (dBi)	5.10
15.407 Conducted Power Limit (dBm)	30.00
RSS-247 Conducted Power Limit (dBm)	30.00
Total Conducted Power (dBm)	17.30
15.407 EIRP Limit (dBm)	36.00
RSS-247 EIRP Limit (dBm)	36.00
EIRP Power (dBm)	22.40

Table 144 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.50
Conducted Power Core 1 (dBm)	12.56
Conducted Power Core 2 (dBm)	12.60
Antenna Directional Gain (dBi)	3.72
15.407 Conducted Power Limit (dBm)	30.00
RSS-247 Conducted Power Limit (dBm)	30.00
Total Conducted Power (dBm)	17.33
15.407 EIRP Limit (dBm)	36.00
RSS-247 EIRP Limit (dBm)	36.00
EIRP Power (dBm)	21.05

Table 145 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2



Channel	Middle
Frequency (MHz)	5775
Conducted Power Core 0 (dBm)	12.48
Conducted Power Core 1 (dBm)	12.64
Conducted Power Core 2 (dBm)	12.57
Antenna Directional Gain (dBi)	8.42
15.407 Conducted Power Limit (dBm)	27.58
RSS-247 Conducted Power Limit (dBm)	27.58
Total Conducted Power (dBm)	17.34
15.407 EIRP Limit (dBm)	36.00
RSS-247 EIRP Limit (dBm)	36.00
EIRP Power (dBm)	25.75

Table 146 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5775
Antenna Directional Gain (dBi)	2.3
15.407 Conducted Power Limit (dBm)	30
RSS-247 Conducted Power Limit (dBm)	30
Conducted Power (dBm)	12.69
15.407 EIRP Limit (dBm)	36
RSS-247 EIRP Limit (dBm)	36
EIRP Power (dBm)	14.99

Table 147 - 802.11ac / VHT80 MCS0x1 / Aux Core



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted TX Power	30 dBm (1W) for master device 24 dBm (250 mW) for client device	24 dBm (250 mW) or 11 dBm + 10 Log B, whichever is lower (B = 26 dB emission BW)		30 dBm (1 W)
Max EIRP	4W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBi antenna Additional rule for outdoor operation: Max EIRP < 125 mW (21 dBm) at any elevation angle > 30° from horizon.	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna. No EIRP limit for fixed P-t-P application (i.e. no antenna gain limit)

Table 148

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1 and 6.2.4.1

Device	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
OEM installed in vehicles	30 mW or $1.76 + 10 \log_{10} B$, dBm (EIRP); whichever is less	30 mW or $1.76 + 10 \log_{10} B$, dBm (EIRP); whichever is less	-	-
Other	200 mW or $10 + 10 \log_{10} B$ dBm (EIRP); whichever is less	250 mW or $11 + 10 \log_{10} B$; whichever is less 1.0 W or $17 + 10 \log_{10} B$ dBm EIRP; whichever is less	250 mW or $11 + 10 \log_{10} B$; whichever is less 1.0 W or $17 + 10 \log_{10} B$ dBm EIRP; whichever is less	1W 4W EIRP

Table 149



2.1.10 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 3.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	13-Jun-2020
Hygrometer	Rotronic	I-1000	2891	12	02-Oct-2020
True RMS Multimeter	Fluke	179	4007	12	30-Oct-2019
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	6-Feb-2020
USB Power Sensor	Boonton	RTP5006	5184	12	12-Dec-2019
AC Programmable PSU	iTech	IT7324	5227	-	O/P Mon
Power Splitter, 4 way	Mini-Circuits	ZN4PD1-63-S+	5235	-	O/P Mon
Power Splitter, 4 way	Mini-Circuits	ZN4PD1-63-S+	5236	-	O/P Mon
Power Splitter, 2 way	Mini-Circuits	ZN2PD2-63-S+	5238	-	O/P Mon
Power splitter, 2 port	Mini-Circuits	ZN2PD-63-S+	4742	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon

Table 150

O/P Mon – Output Monitored using Calibrated Equipment.



2.2 Maximum Conducted Power Spectral Density

2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2
ISED RSS-GEN, Clause 6.12

2.2.2 Equipment Under Test and Modification State

A2141, S/N: C02YT007L513 - Modification State 0

2.2.3 Date of Test

15 August 2019 to 04 October 2019

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.5 and KDB 789033 D02.

Where the EUT duty cycle was < 98 % and repeatable within 2 %, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method SA-2). Where the duty cycle was ≥ 98 % the spectrum analyser was set to trace (power) averaging and no duty cycle correction made (Method SA-1). In all other cases the spectrum analyser trace was set to max hold (Method SA-3).

Results for the U-NII-3 band were measured in a narrower bandwidth and integrated over 500 kHz using the spectrum analyzers channel power integration function.

The output power was verified as being the same from each transmit core (within negligible tolerances), but the antenna gains were not identical. Therefore, the modes reported here for SISO or 2x2 MIMO operation are those giving the highest EIRP and/or lowest conducted limit based on the combination of antennas giving highest total directional gain.

MIMO output port summing was performed in accordance with KDB 662911 D01:

- For the CDD results the Directional Gain was calculated in accordance with the equation given in clause F)2)f)(ii) summed for a single spacial stream.
- For SDM modes Directional Gain was calculated in accordance with clause F)2)d)(ii).
- For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

2.2.5 Environmental Conditions

Ambient Temperature	19.3 - 26.1°C
Relative Humidity	39.0 - 67.9%



2.2.6 Test Results: U-NII-1

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	1.14	1.30	1.47
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	10.80	10.80	10.80
Conducted PSD Result (dBm/MHz)	1.14	1.30	1.47

Table 151 - 802.11a / 6 Mbps / SISO / Core0 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	1.24	1.57	1.40
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.44	7.77	7.60

Table 152 - 802.11a / 6 Mbps / SISO / Core0 / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	0.86	1.24	1.12
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80	2.80
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.86	1.24	1.12

Table 153 - 802.11a / 6 Mbps / Aux Core / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	0.72	1.25	1.20
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80	2.80
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	3.52	4.05	4.00

Table 154 - 802.11a / 6 Mbps / Aux Core / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	0.90	0.84	1.16
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	10.80	10.80	10.80
Conducted PSD Result (dBm/MHz)	0.90	0.84	1.16

Table 155 - 802.11n / HT20 MCS0 / SISO / Core0 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	1.10	1.14	1.36
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.30	7.34	7.56

Table 156 - 802.11n / HT20 MCS0 / SISO / Core0 / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	0.94	1.21	1.18
Conducted PSD Core 1 (dBm/MHz)	0.71	1.03	0.80
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	7.68	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32	9.32
Conducted PSD Result (dBm/MHz)	3.84	4.13	4.00

Table 157 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-3.47	-3.56	-3.47
Conducted PSD Core 1 (dBm/MHz)	-3.64	-3.66	-3.49
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	7.68	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.13	7.08	7.20

Table 158 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	1.09	0.56	1.23
Conducted PSD Core 1 (dBm/MHz)	0.72	0.64	0.85
Duty Cycle Correction (dB)	0.09	0.09	0.09
Antenna Directional Gain (dBi)	4.82	4.82	4.82
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	4.01	3.70	4.14

Table 159 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code US



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-0.65	-0.61	-0.40
Conducted PSD Core 1 (dBm/MHz)	-0.97	-0.50	-0.80
Duty Cycle Correction (dB)	0.09	0.09	0.09
Antenna Directional Gain (dBi)	4.82	4.82	4.82
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.12	7.37	7.33

Table 160 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	1.69	1.93	2.15
Conducted PSD Core 1 (dBm/MHz)	3.45	1.85	2.17
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32	9.32
Conducted PSD Result (dBm/MHz)	5.67	4.90	5.17

Table 161 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-2.90	-2.37	-2.59
Conducted PSD Core 1 (dBm/MHz)	-2.52	-2.64	-2.21
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.98	8.19	8.29

Table 162 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-1.60	0.81	1.11
Conducted PSD Core 1 (dBm/MHz)	-1.65	0.70	1.38
Conducted PSD Core 2 (dBm/MHz)	-1.32	1.07	1.13
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	8.86	8.86	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14	8.14	8.14
Conducted PSD Result (dBm/MHz)	3.25	5.64	5.98

Table 163 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-6.65	-6.34	-6.18
Conducted PSD Core 1 (dBm/MHz)	-6.54	-6.44	-6.54
Conducted PSD Core 2 (dBm/MHz)	-6.55	-6.28	-6.52
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	8.86	8.86	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.05	7.28	7.22

Table 164 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	0.23	0.80	1.16
Conducted PSD Core 1 (dBm/MHz)	0.55	0.67	0.90
Conducted PSD Core 2 (dBm/MHz)	0.50	1.14	1.38
Duty Cycle Correction (dB)	0.12	0.12	0.12
Antenna Directional Gain (dBi)	4.25	4.25	4.25
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.32	5.77	6.04

Table 165 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code US



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-1.70	-1.81	-1.31
Conducted PSD Core 1 (dBm/MHz)	-1.81	-1.73	-1.65
Conducted PSD Core 2 (dBm/MHz)	-1.75	-1.32	-1.55
Duty Cycle Correction (dB)	0.12	0.12	0.12
Antenna Directional Gain (dBi)	4.25	4.25	4.25
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.39	7.53	7.64

Table 166 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	0.96	0.68	0.96
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80	2.80
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.96	0.68	0.96

Table 167 - 802.11n / HT20 MCS0 / Aux Core / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Raw Conducted PSD (dBm/MHz)	0.49	0.92	0.91
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80	2.80
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	3.29	3.72	3.71

Table 168 - 802.11n / HT20 MCS0 / Aux Core / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Raw Conducted PSD (dBm/MHz)	-2.05	-1.68
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	10.80	10.80
Conducted PSD Result (dBm/MHz)	-2.05	-1.68

Table 169 - 802.11n / HT40 MCS0 / SISO / Core0 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Raw Conducted PSD (dBm/MHz)	-2.17	-1.75
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	4.03	4.45

Table 170 - 802.11n / HT40 MCS0 / SISO / Core0 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-1.94	-1.86
Conducted PSD Core 1 (dBm/MHz)	-2.46	-1.74
Duty Cycle Correction (dB)	0.09	0.09
Antenna Directional Gain (dBi)	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32
Conducted PSD Result (dBm/MHz)	0.91	1.30

Table 171 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-3.21	-3.11
Conducted PSD Core 1 (dBm/MHz)	-3.87	-3.20
Duty Cycle Correction (dB)	0.09	0.09
Antenna Directional Gain (dBi)	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.25	7.63

Table 172 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-2.66	-1.78
Conducted PSD Core 1 (dBm/MHz)	-2.34	-2.07
Duty Cycle Correction (dB)	0.18	0.18
Antenna Directional Gain (dBi)	4.82	4.82
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.69	1.27

Table 173 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-2.59	-2.03
Conducted PSD Core 1 (dBm/MHz)	-2.58	-1.76
Duty Cycle Correction (dB)	0.18	0.18
Antenna Directional Gain (dBi)	4.82	4.82
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	5.43	6.12

Table 174 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-2.26	-0.65
Conducted PSD Core 1 (dBm/MHz)	-2.64	-0.81
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32
Conducted PSD Result (dBm/MHz)	0.57	2.28

Table 175 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-3.48	-3.08
Conducted PSD Core 1 (dBm/MHz)	-3.34	-3.08
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.28	7.61

Table 176 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1 / Country Code CA



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-4.34	-1.67
Conducted PSD Core 1 (dBm/MHz)	-4.71	-1.24
Conducted PSD Core 2 (dBm/MHz)	-4.33	-1.96
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	8.86	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14	8.14
Conducted PSD Result (dBm/MHz)	0.32	3.16

Table 177 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-6.13	-6.16
Conducted PSD Core 1 (dBm/MHz)	-6.73	-6.56
Conducted PSD Core 2 (dBm/MHz)	-6.44	-6.01
Duty Cycle Correction (dB)	N/A SA-1	0.09
Antenna Directional Gain (dBi)	8.86	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.20	7.48

Table 178 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-3.78	-1.99
Conducted PSD Core 1 (dBm/MHz)	-3.52	-1.89
Conducted PSD Core 2 (dBm/MHz)	-3.22	-1.86
Duty Cycle Correction (dB)	0.23	0.23
Antenna Directional Gain (dBi)	4.25	4.25
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.50	3.09

Table 179 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code US



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-3.61	-2.56
Conducted PSD Core 1 (dBm/MHz)	-3.71	-2.57
Conducted PSD Core 2 (dBm/MHz)	-3.27	-2.18
Duty Cycle Correction (dB)	0.23	0.23
Antenna Directional Gain (dBi)	4.25	4.25
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	5.72	6.81

Table 180 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Raw Conducted PSD (dBm/MHz)	-2.27	-1.79
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	-2.27	-1.79

Table 181 - 802.11n / HT40 MCS0 / Aux Core / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Raw Conducted PSD (dBm/MHz)	-2.24	-1.90
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.80	2.80
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	0.56	0.90

Table 182 - 802.11n / HT40 MCS0 / Aux Core / Country Code CA



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	3.21	2.11	2.65
Conducted PSD Core 1 (dBm/MHz)	3.45	2.41	2.72
Duty Cycle Correction (dB)	N/A SA-3	0.26	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32	9.32
Conducted PSD Result (dBm/MHz)	6.34	5.53	5.69

Table 183 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-2.22	-2.24	-1.60
Conducted PSD Core 1 (dBm/MHz)	-2.61	-2.47	-0.90
Duty Cycle Correction (dB)	0.30	0.26	N/A SA-3
Antenna Directional Gain (dBi)	7.68	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	8.58	8.59	9.45

Table 184 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-0.97	2.06	2.01
Conducted PSD Core 1 (dBm/MHz)	-0.22	2.23	2.32
Conducted PSD Core 2 (dBm/MHz)	-0.66	1.98	2.07
Duty Cycle Correction (dB)	0.37	0.30	0.34
Antenna Directional Gain (dBi)	8.86	8.86	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14	8.14	8.14
Conducted PSD Result (dBm/MHz)	4.54	7.16	7.25

Table 185 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
Conducted PSD Core 0 (dBm/MHz)	-7.22	-5.10	-5.32
Conducted PSD Core 1 (dBm/MHz)	-6.56	-7.13	-6.31
Conducted PSD Core 2 (dBm/MHz)	-7.06	-7.90	-5.36
Duty Cycle Correction (dB)	0.31	0.31	0.31
Antenna Directional Gain (dBi)	8.86	8.86	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	7.00	7.39	8.30

Table 186 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-4.02	-2.25
Conducted PSD Core 1 (dBm/MHz)	-3.55	-1.96
Duty Cycle Correction (dB)	0.29	0.28
Antenna Directional Gain (dBi)	7.68	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32	9.32
Conducted PSD Result (dBm/MHz)	-0.48	1.19

Table 187 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-4.64	-4.20
Conducted PSD Core 1 (dBm/MHz)	-4.23	-4.14
Duty Cycle Correction (dB)	0.26	0.26
Antenna Directional Gain (dBi)	7.68	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	6.52	6.78

Table 188 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA



Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-5.43	-2.44
Conducted PSD Core 1 (dBm/MHz)	-5.74	-1.99
Conducted PSD Core 2 (dBm/MHz)	-5.74	-2.01
Duty Cycle Correction (dB)	0.34	0.35
Antenna Directional Gain (dBi)	8.86	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14	8.14
Conducted PSD Result (dBm/MHz)	-0.52	2.98

Table 189 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US

Channel	Bottom	Top
Frequency (MHz)	5190	5230
Conducted PSD Core 0 (dBm/MHz)	-7.44	-7.32
Conducted PSD Core 1 (dBm/MHz)	-7.55	-6.96
Conducted PSD Core 2 (dBm/MHz)	-7.70	-7.42
Duty Cycle Correction (dB)	0.37	0.35
Antenna Directional Gain (dBi)	8.86	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00	10.00
EIRP Spectral Density Result (dBm/MHz)	6.44	6.75

Table 190 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Raw Conducted PSD (dBm/MHz)	-4.53
Duty Cycle Correction (dB)	0.17
Antenna Directional Gain (dBi)	6.20
15.407 Conducted PSD Limit (dBm/MHz)	10.80
Conducted PSD Result (dBm/MHz)	-4.36

Table 191 - 802.11ac / VHT80 MCS0x1 / SISO / Core0 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Raw Conducted PSD (dBm/MHz)	-5.00
Duty Cycle Correction (dB)	0.17
Antenna Directional Gain (dBi)	6.20
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	1.37

Table 192 - 802.11ac / VHT80 MCS0x1 / SISO / Core0 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-5.96
Conducted PSD Core 1 (dBm/MHz)	-6.04
Duty Cycle Correction (dB)	0.18
Antenna Directional Gain (dBi)	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32
Conducted PSD Result (dBm/MHz)	-2.81

Table 193 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-5.93
Conducted PSD Core 1 (dBm/MHz)	-6.20
Duty Cycle Correction (dB)	0.19
Antenna Directional Gain (dBi)	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	4.81

Table 194 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1 / Country Code CA



Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-5.69
Conducted PSD Core 1 (dBm/MHz)	-5.42
Duty Cycle Correction (dB)	0.34
Antenna Directional Gain (dBi)	4.82
15.407 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.21

Table 195 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-5.57
Conducted PSD Core 1 (dBm/MHz)	-5.81
Duty Cycle Correction (dB)	0.33
Antenna Directional Gain (dBi)	4.82
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	2.48

Table 196 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-5.33
Conducted PSD Core 1 (dBm/MHz)	-6.16
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	7.68
15.407 Conducted PSD Limit (dBm/MHz)	9.32
Conducted PSD Result (dBm/MHz)	-2.72

Table 197 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-7.25
Conducted PSD Core 1 (dBm/MHz)	-6.88
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	7.68
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	3.62

Table 198 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-7.63
Conducted PSD Core 1 (dBm/MHz)	-7.63
Conducted PSD Core 2 (dBm/MHz)	-7.87
Duty Cycle Correction (dB)	0.17
Antenna Directional Gain (dBi)	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14
Conducted PSD Result (dBm/MHz)	-2.76

Table 199 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-7.65
Conducted PSD Core 1 (dBm/MHz)	-7.98
Conducted PSD Core 2 (dBm/MHz)	-7.99
Duty Cycle Correction (dB)	0.17
Antenna Directional Gain (dBi)	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	5.93

Table 200 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2 / Country Code CA



Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-7.60
Conducted PSD Core 1 (dBm/MHz)	-7.36
Conducted PSD Core 2 (dBm/MHz)	-7.88
Duty Cycle Correction (dB)	0.40
Antenna Directional Gain (dBi)	4.25
15.407 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.43

Table 201 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2 / Country Code US

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-7.74
Conducted PSD Core 1 (dBm/MHz)	-7.73
Conducted PSD Core 2 (dBm/MHz)	-7.53
Duty Cycle Correction (dB)	0.40
Antenna Directional Gain (dBi)	4.25
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	1.76

Table 202 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-8.04
Conducted PSD Core 1 (dBm/MHz)	-7.87
Conducted PSD Core 2 (dBm/MHz)	-7.59
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	8.86
15.407 Conducted PSD Limit (dBm/MHz)	8.14
Conducted PSD Result (dBm/MHz)	-3.06

Table 203 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code US



Channel	Middle
Frequency (MHz)	5210
Conducted PSD Core 0 (dBm/MHz)	-8.64
Conducted PSD Core 1 (dBm/MHz)	-7.99
Conducted PSD Core 2 (dBm/MHz)	-8.58
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	8.86
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	5.23

Table 204 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2 / Country Code CA

Channel	Middle
Frequency (MHz)	5210
Raw Conducted PSD (dBm/MHz)	-5.01
Duty Cycle Correction (dB)	0.15
Antenna Directional Gain (dBi)	2.80
15.407 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-4.86

Table 205 - 802.11ac / VHT80 MCS0x1 / Aux Core / Country Code US

Channel	Middle
Frequency (MHz)	5210
Raw Conducted PSD (dBm/MHz)	-4.96
Duty Cycle Correction (dB)	0.16
Antenna Directional Gain (dBi)	2.80
RSS-247 EIRP Spectral Density Limit (dBm/MHz)	10.00
EIRP Spectral Density Result (dBm/MHz)	-2.00

Table 206 - 802.11ac / VHT80 MCS0x1 / Aux Core / Country Code CA



2.2.7 Test Results: U-NII-2A

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Raw Conducted PSD (dBm/MHz)	0.68	0.92	1.44
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.68	0.92	1.44

Table 207 - 802.11a / 6 Mbps / SISO / Core0

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Raw Conducted PSD (dBm/MHz)	0.94	0.95	1.06
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	3.00	3.00	3.00
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.94	0.95	1.06

Table 208 - 802.11a / 6 Mbps / Aux Core

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Raw Conducted PSD (dBm/MHz)	0.74	0.81	1.16
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.30	6.30	6.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.74	0.81	1.16

Table 209 - 802.11n / HT20 MCS0 / SISO / Core0



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	0.63	0.50	0.98
Conducted PSD Core 1 (dBm/MHz)	0.48	0.52	1.06
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	7.90	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	3.57	3.52	4.03

Table 210 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	0.72	0.80	1.01
Conducted PSD Core 1 (dBm/MHz)	0.53	0.50	1.14
Duty Cycle Correction (dB)	0.09	0.09	0.09
Antenna Directional Gain (dBi)	5.02	5.02	5.02
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	3.73	3.75	4.18

Table 211 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	1.37	2.00	1.58
Conducted PSD Core 1 (dBm/MHz)	1.35	1.86	1.17
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.90	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	4.37	4.94	4.39

Table 212 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	0.64	0.96	-1.10
Conducted PSD Core 1 (dBm/MHz)	0.65	0.58	-1.16
Conducted PSD Core 2 (dBm/MHz)	0.27	0.74	-1.07
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	9.07	9.07	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.29	5.53	3.66

Table 213 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	0.28	1.17	0.44
Conducted PSD Core 1 (dBm/MHz)	0.46	0.47	0.40
Conducted PSD Core 2 (dBm/MHz)	0.91	0.57	0.41
Duty Cycle Correction (dB)	0.12	0.12	0.12
Antenna Directional Gain (dBi)	4.45	4.45	4.45
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.45	5.64	5.31

Table 214 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Raw Conducted PSD (dBm/MHz)	0.46	0.73	0.64
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	3.00	3.00	3.00
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.46	0.73	0.64

Table 215 - 802.11n / HT20 MCS0 / Aux Core



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Raw Conducted PSD (dBm/MHz)	-2.34	-1.98
Duty Cycle Correction (dB)	0.09	N/A SA-1
Antenna Directional Gain (dBi)	6.30	6.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	-2.25	-1.98

Table 216 - 802.11n / HT40 MCS0 / SISO / Core0

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-2.49	-2.72
Conducted PSD Core 1 (dBm/MHz)	-1.98	-2.51
Duty Cycle Correction (dB)	0.09	0.10
Antenna Directional Gain (dBi)	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.87	0.49

Table 217 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-2.47	-2.04
Conducted PSD Core 1 (dBm/MHz)	-2.41	-2.11
Duty Cycle Correction (dB)	0.18	0.18
Antenna Directional Gain (dBi)	5.02	5.02
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.75	1.11

Table 218 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-1.52	-2.28
Conducted PSD Core 1 (dBm/MHz)	-1.09	-2.25
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.71	0.75

Table 219 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-2.38	-4.05
Conducted PSD Core 1 (dBm/MHz)	-2.20	-4.12
Conducted PSD Core 2 (dBm/MHz)	-2.30	-3.87
Duty Cycle Correction (dB)	0.09	N/A SA-1
Antenna Directional Gain (dBi)	9.07	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.57	0.76

Table 220 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-2.65	-2.44
Conducted PSD Core 1 (dBm/MHz)	-2.58	-2.84
Conducted PSD Core 2 (dBm/MHz)	-2.46	-2.79
Duty Cycle Correction (dB)	0.23	0.23
Antenna Directional Gain (dBi)	4.45	4.45
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.44	2.32

Table 221 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Raw Conducted PSD (dBm/MHz)	-2.28	-2.10
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	3.00	3.00
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	-2.28	-2.10

Table 222 - 802.11n / HT40 MCS0 / Aux Core



Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	1.45	2.15	1.83
Conducted PSD Core 1 (dBm/MHz)	1.70	1.94	2.05
Duty Cycle Correction (dB)	0.34	0.28	0.26
Antenna Directional Gain (dBi)	7.90	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	4.93	5.34	5.21

Table 223 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	5260	5280	5320
Conducted PSD Core 0 (dBm/MHz)	2.94	2.72	0.00
Conducted PSD Core 1 (dBm/MHz)	2.31	2.43	-0.45
Conducted PSD Core 2 (dBm/MHz)	2.72	2.22	-0.61
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	9.07	9.07	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	7.43	7.23	4.42

Table 224 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-0.61	-1.00
Conducted PSD Core 1 (dBm/MHz)	-0.48	-0.81
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.90	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.47	2.10

Table 225 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Top
Frequency (MHz)	5270	5310
Conducted PSD Core 0 (dBm/MHz)	-0.44	-4.08
Conducted PSD Core 1 (dBm/MHz)	0.14	-3.30
Conducted PSD Core 2 (dBm/MHz)	-1.01	-4.05
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	9.07	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00
Conducted PSD Result (dBm/MHz)	4.36	0.97

Table 226 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Raw Conducted PSD (dBm/MHz)	-5.12
Duty Cycle Correction (dB)	0.18
Antenna Directional Gain (dBi)	6.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-4.94

Table 227 - 802.11ac / VHT80 MCS0x1 / SISO / Core0

Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-5.65
Conducted PSD Core 1 (dBm/MHz)	-5.70
Duty Cycle Correction (dB)	0.18
Antenna Directional Gain (dBi)	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.49

Table 228 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-5.07
Conducted PSD Core 1 (dBm/MHz)	-5.04
Duty Cycle Correction (dB)	0.33
Antenna Directional Gain (dBi)	5.02
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-1.71

Table 229 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-5.46
Conducted PSD Core 1 (dBm/MHz)	-4.75
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	7.90
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.08

Table 230 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-7.46
Conducted PSD Core 1 (dBm/MHz)	-7.12
Conducted PSD Core 2 (dBm/MHz)	-7.29
Duty Cycle Correction (dB)	0.17
Antenna Directional Gain (dBi)	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.34

Table 231 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2



Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-7.39
Conducted PSD Core 1 (dBm/MHz)	-7.30
Conducted PSD Core 2 (dBm/MHz)	-7.00
Duty Cycle Correction (dB)	0.41
Antenna Directional Gain (dBi)	4.45
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-2.05

Table 232 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Conducted PSD Core 0 (dBm/MHz)	-5.99
Conducted PSD Core 1 (dBm/MHz)	-6.77
Conducted PSD Core 2 (dBm/MHz)	-7.09
Duty Cycle Correction (dB)	N/A SA-3
Antenna Directional Gain (dBi)	9.07
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-1.82

Table 233 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Middle
Frequency (MHz)	5290
Raw Conducted PSD (dBm/MHz)	-5.16
Duty Cycle Correction (dB)	0.16
Antenna Directional Gain (dBi)	3.00
15.407 Conducted PSD Limit (dBm/MHz)	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00
Conducted PSD Result (dBm/MHz)	-4.99

Table 234 - 802.11ac / VHT80 MCS0x1 / Aux Core



2.2.8 Test Results: U-NII-2C

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Raw Conducted PSD (dBm/MHz)	0.89	1.63	1.46	2.04
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.89	1.63	1.46	2.04

Table 235 - 802.11a / 6 Mbps / SISO / Core0

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Raw Conducted PSD (dBm/MHz)	0.28	1.31	1.48	1.59
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.28	1.31	1.48	1.59

Table 236 - 802.11a / 6 Mbps / Aux Core

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Raw Conducted PSD (dBm/MHz)	1.10	0.96	1.23	1.46
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.10	0.96	1.23	1.46

Table 237 - 802.11n / HT20 MCS0 / SISO / Core0



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	0.72	0.96	0.85	1.67
Conducted PSD Core 1 (dBm/MHz)	0.50	1.06	1.36	0.93
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	3.63	4.02	4.12	4.32

Table 238 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	0.57	0.72	1.51	1.57
Conducted PSD Core 1 (dBm/MHz)	0.45	0.84	0.97	0.94
Duty Cycle Correction (dB)	0.09	0.09	0.09	0.09
Antenna Directional Gain (dBi)	4.99	4.99	4.99	4.99
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	3.61	3.88	4.35	4.37

Table 239 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	1.28	3.34	2.04	1.71
Conducted PSD Core 1 (dBm/MHz)	3.16	3.26	2.06	2.21
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.33	6.31	5.06	4.98

Table 240 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	0.32	0.86	0.80	1.58
Conducted PSD Core 1 (dBm/MHz)	0.55	1.16	0.69	1.44
Conducted PSD Core 2 (dBm/MHz)	0.86	1.66	0.80	1.61
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.35	6.01	5.53	6.31

Table 241 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	0.79	1.56	0.99	1.69
Conducted PSD Core 1 (dBm/MHz)	0.50	1.04	1.08	1.01
Conducted PSD Core 2 (dBm/MHz)	0.82	1.30	0.67	1.39
Duty Cycle Correction (dB)	0.12	0.12	0.12	0.12
Antenna Directional Gain (dBi)	4.26	4.26	4.26	4.26
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	5.59	6.20	5.81	6.27

Table 242 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Raw Conducted PSD (dBm/MHz)	0.66	1.00	1.15	1.09
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.66	1.00	1.15	1.09

Table 243 - 802.11n / HT20 MCS0 / Aux Core

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Raw Conducted PSD (dBm/MHz)	-2.18	-1.72	-1.69	-1.85
Duty Cycle Correction (dB)	N/A SA-1	0.09	0.09	N/A SA-1
Antenna Directional Gain (dBi)	6.20	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-2.18	-1.63	-1.61	-1.85

Table 244 - 802.11n / HT40 MCS0 / SISO / Core0



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-2.14	-1.73	-1.35	-1.72
Conducted PSD Core 1 (dBm/MHz)	-2.37	-1.84	-1.56	-1.86
Duty Cycle Correction (dB)	0.09	0.09	0.09	0.09
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.85	1.31	1.65	1.31

Table 245 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-1.88	-1.75	-1.78	-1.55
Conducted PSD Core 1 (dBm/MHz)	-2.04	-2.01	-2.00	-1.74
Duty Cycle Correction (dB)	0.18	0.17	0.18	0.18
Antenna Directional Gain (dBi)	4.99	4.99	4.99	4.99
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.23	1.30	1.30	1.54

Table 246 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-2.20	-0.88	-1.03	-0.81
Conducted PSD Core 1 (dBm/MHz)	-1.26	-0.62	-1.15	-0.83
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.30	2.26	1.92	2.19

Table 247 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-2.66	-1.52	-1.12	-1.53
Conducted PSD Core 1 (dBm/MHz)	-2.99	-1.69	-1.65	-1.42
Conducted PSD Core 2 (dBm/MHz)	-2.72	-1.55	-1.26	-1.10
Duty Cycle Correction (dB)	N/A SA-1	0.09	0.09	0.09
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.98	3.28	3.52	3.52

Table 248 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-2.17	-1.54	-1.33	-1.70
Conducted PSD Core 1 (dBm/MHz)	-2.22	-2.01	-2.06	-2.07
Conducted PSD Core 2 (dBm/MHz)	-2.00	-1.61	-1.38	-1.47
Duty Cycle Correction (dB)	0.23	0.23	0.23	0.23
Antenna Directional Gain (dBi)	4.26	4.26	4.26	4.26
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.87	3.28	3.42	3.26

Table 249 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Raw Conducted PSD (dBm/MHz)	-2.30	-1.49	-1.75	-1.54
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-2.30	-1.49	-1.75	-1.54

Table 250 - 802.11n / HT40 MCS0 / Aux Core



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	2.61	3.42	3.70	2.81
Conducted PSD Core 1 (dBm/MHz)	3.75	3.15	4.28	3.13
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	6.23	6.30	7.01	5.98

Table 251 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5500	5600	5700	5720
Conducted PSD Core 0 (dBm/MHz)	2.32	3.14	2.12	3.29
Conducted PSD Core 1 (dBm/MHz)	2.74	3.34	1.75	3.74
Conducted PSD Core 2 (dBm/MHz)	2.39	4.22	2.24	3.42
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	7.26	8.36	6.81	8.26

Table 252 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-1.85	-0.92	0.03	0.46
Conducted PSD Core 1 (dBm/MHz)	-2.36	-0.12	-0.15	-0.26
Duty Cycle Correction (dB)	1.02	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	1.93	2.50	2.95	3.12

Table 253 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Bottom	Middle	Top	Straddle
Frequency (MHz)	5510	5590	5670	5710
Conducted PSD Core 0 (dBm/MHz)	-2.12	-0.85	1.14	-0.08
Conducted PSD Core 1 (dBm/MHz)	-2.22	-0.60	-0.07	0.35
Conducted PSD Core 2 (dBm/MHz)	-1.92	-0.06	-0.20	0.16
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.69	4.28	5.10	4.92

Table 254 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Raw Conducted PSD (dBm/MHz)	-4.49	-4.21	-4.06
Duty Cycle Correction (dB)	0.18	0.18	0.18
Antenna Directional Gain (dBi)	6.20	6.20	6.20
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-4.31	-4.03	-3.88

Table 255 - 802.11ac / VHT80 MCS0x1 / SISO / Core0

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	-4.99	-4.42	-3.71
Conducted PSD Core 1 (dBm/MHz)	-5.07	-4.59	-4.12
Duty Cycle Correction (dB)	0.19	0.20	0.18
Antenna Directional Gain (dBi)	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-1.83	-1.30	-0.72

Table 256 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	-4.72	-4.14	-4.34
Conducted PSD Core 1 (dBm/MHz)	-4.82	-4.12	-4.08
Duty Cycle Correction (dB)	0.33	0.32	N/A SA-1
Antenna Directional Gain (dBi)	4.99	4.99	4.99
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-1.42	-0.80	-1.20

Table 257 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	-4.63	-3.59	-2.83
Conducted PSD Core 1 (dBm/MHz)	-4.68	-3.62	-2.79
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.88	7.88
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-1.65	-0.59	0.20

Table 258 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	-6.15	-4.11	-3.99
Conducted PSD Core 1 (dBm/MHz)	-6.22	-4.43	-4.29
Conducted PSD Core 2 (dBm/MHz)	-6.01	-4.18	-4.28
Duty Cycle Correction (dB)	0.18	0.18	0.18
Antenna Directional Gain (dBi)	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-1.18	0.72	0.77

Table 259 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2



Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	-5.17	-4.31	-4.22
Conducted PSD Core 1 (dBm/MHz)	-4.97	-4.70	-4.26
Conducted PSD Core 2 (dBm/MHz)	-5.30	-4.44	-4.40
Duty Cycle Correction (dB)	0.40	0.42	0.42
Antenna Directional Gain (dBi)	4.26	4.26	4.26
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	0.03	0.71	0.90

Table 260 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Conducted PSD Core 0 (dBm/MHz)	0.37	-3.50	-0.84
Conducted PSD Core 1 (dBm/MHz)	-5.51	-3.94	-2.80
Conducted PSD Core 2 (dBm/MHz)	-6.45	-3.09	-2.63
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.87	8.87
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	2.03	1.27	2.78

Table 261 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Bottom	Top	Straddle
Frequency (MHz)	5530	5610	5690
Raw Conducted PSD (dBm/MHz)	-4.53	-4.61	-4.00
Duty Cycle Correction (dB)	0.15	0.15	0.16
Antenna Directional Gain (dBi)	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
RSS-247 Conducted PSD Limit (dBm/MHz)	11.00	11.00	11.00
Conducted PSD Result (dBm/MHz)	-4.38	-4.47	-3.84

Table 262 - 802.11ac / VHT80 MCS0x1 / Aux Core



2.2.9 Test Results: U-NII-3

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Raw Conducted PSD (dBm/500kHz)	-1.68	-1.74	-1.67	-1.38
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	5.10	5.10	5.10
15.407 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-1.68	-1.74	-1.67	-1.38

Table 263 - 802.11a / 6 Mbps / SISO / Core0

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Raw Conducted PSD (dBm/500kHz)	-2.07	-1.29	-1.28	-1.37
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-2.07	-1.29	-1.28	-1.37

Table 264 - 802.11a / 6 Mbps / Aux Core

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Raw Conducted PSD (dBm/500kHz)	-2.06	-1.88	-2.35	-1.25
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	6.20	5.10	5.10	5.10
15.407 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-2.06	-1.88	-2.35	-1.25

Table 265 - 802.11n / HT20 MCS0 / SISO / Core0



Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-1.87	-1.77	-2.02	-1.50
Conducted PSD Core 1 (dBm/500kHz)	-2.25	-2.04	-2.55	-1.92
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	7.88	7.26	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
Conducted PSD Result (dBm/500kHz)	0.95	1.11	0.73	1.31

Table 266 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1



Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.06	-2.17	-1.94	-1.86
Conducted PSD Core 1 (dBm/500kHz)	-2.32	-1.93	-2.10	-2.20
Duty Cycle Correction (dB)	0.09	0.09	0.09	0.09
Antenna Directional Gain (dBi)	4.99	4.29	4.29	4.29
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	0.91	1.05	1.08	1.08

Table 267 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.50	-1.97	-1.86	-0.85
Conducted PSD Core 1 (dBm/500kHz)	-2.26	-1.42	-2.49	-2.00
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.26	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
Conducted PSD Result (dBm/500kHz)	0.63	1.32	0.85	1.62

Table 268 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.32	-1.44	-1.79	-2.00
Conducted PSD Core 1 (dBm/500kHz)	-2.02	-1.88	-1.73	-2.11
Conducted PSD Core 2 (dBm/500kHz)	-1.83	-1.76	-2.20	-1.66
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	8.87	8.42	8.42	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58	27.58
Conducted PSD Result (dBm/500kHz)	2.72	3.08	2.87	2.85

Table 269 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2



Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.10	-1.91	-1.81	-1.34
Conducted PSD Core 1 (dBm/500kHz)	-2.98	-2.26	-2.37	-1.94
Conducted PSD Core 2 (dBm/500kHz)	-1.92	-2.05	-1.74	-1.06
Duty Cycle Correction (dB)	0.12	0.12	0.12	N/A SA-1
Antenna Directional Gain (dBi)	4.26	3.72	3.72	3.72
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	2.58	2.82	2.93	3.34

Table 270 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Raw Conducted PSD (dBm/500kHz)	-2.11	-1.62	-1.56	-1.52
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-2.11	-1.62	-1.56	-1.52

Table 271 - 802.11n / HT20 MCS0 / Aux Core

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Raw Conducted PSD (dBm/500kHz)	-5.73	-4.61	-5.39
Duty Cycle Correction (dB)	0.09	0.09	N/A SA-1
Antenna Directional Gain (dBi)	6.20	5.10	5.10
15.407 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	29.80	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-5.64	-4.52	-5.39

Table 272 - 802.11n / HT40 MCS0 / SISO / Core0



Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.84	-5.27	-4.67
Conducted PSD Core 1 (dBm/500kHz)	-5.19	-4.62	-4.98
Duty Cycle Correction (dB)	0.09	0.09	0.09
Antenna Directional Gain (dBi)	7.88	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
Conducted PSD Result (dBm/500kHz)	-2.40	-1.83	-1.72

Table 273 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.45	-5.25	-5.35
Conducted PSD Core 1 (dBm/500kHz)	-5.57	-4.86	-5.67
Duty Cycle Correction (dB)	0.17	0.18	0.18
Antenna Directional Gain (dBi)	4.99	4.29	4.29
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-2.33	-1.86	-2.32

Table 274 - 802.11n / HT40 MCS8 / MIMO SDM / Cores 0+1

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.61	-3.94	-5.13
Conducted PSD Core 1 (dBm/500kHz)	-5.49	-4.51	-4.93
Duty Cycle Correction (dB)	N/A SA-3	0.15	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
Conducted PSD Result (dBm/500kHz)	-2.54	-1.05	-2.02

Table 275 - 802.11n / HT40 MCS0 / MIMO TxBF / Cores 0+1



Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.41	-4.42	-4.86
Conducted PSD Core 1 (dBm/500kHz)	-5.31	-4.35	-5.28
Conducted PSD Core 2 (dBm/500kHz)	-4.78	-4.93	-4.70
Duty Cycle Correction (dB)	N/A SA-1	0.09	N/A SA-1
Antenna Directional Gain (dBi)	8.87	8.42	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58
Conducted PSD Result (dBm/500kHz)	-0.39	0.30	-0.17

Table 276 - 802.11n / HT40 MCS0 / MIMO CDD / Cores 0+1+2

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.84	-4.79	-5.44
Conducted PSD Core 1 (dBm/500kHz)	-5.17	-5.49	-5.32
Conducted PSD Core 2 (dBm/500kHz)	-4.75	-5.08	-4.55
Duty Cycle Correction (dB)	0.23	0.23	0.23
Antenna Directional Gain (dBi)	4.26	3.72	3.72
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-0.23	-0.11	-0.09

Table 277 - 802.11n / HT40 MCS16 / MIMO SDM / Cores 0+1+2

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Raw Conducted PSD (dBm/500kHz)	-5.73	-4.42	-4.64
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
Antenna Directional Gain (dBi)	2.30	2.30	2.30
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-5.73	-4.42	-4.64

Table 278 - 802.11n / HT40 MCS0 / Aux Core



Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.96	-2.43	-2.40	-2.43
Conducted PSD Core 1 (dBm/500kHz)	-2.73	-2.17	-2.19	-1.93
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.26	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74	28.74
Conducted PSD Result (dBm/500kHz)	0.17	0.71	0.72	0.84

Table 279 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Straddle	Bottom	Middle	Top
Frequency (MHz)	5720	5745	5785	5825
Conducted PSD Core 0 (dBm/500kHz)	-2.85	-1.93	-2.57	-2.28
Conducted PSD Core 1 (dBm/500kHz)	-2.87	-2.56	-0.56	-2.39
Conducted PSD Core 2 (dBm/500kHz)	-2.75	-1.75	-2.24	-1.77
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.42	8.42	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58	27.58
Conducted PSD Result (dBm/500kHz)	1.95	2.70	3.07	2.63

Table 280 - 802.11ac / VHT20 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.94	-4.66	-4.83
Conducted PSD Core 1 (dBm/500kHz)	-5.65	-5.03	-5.19
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.26	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74	28.74
Conducted PSD Result (dBm/500kHz)	-2.78	-1.83	-1.99

Table 281 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1



Channel	Straddle	Bottom	Top
Frequency (MHz)	5710	5755	5795
Conducted PSD Core 0 (dBm/500kHz)	-5.61	-5.08	-4.91
Conducted PSD Core 1 (dBm/500kHz)	-5.91	-5.46	-5.17
Conducted PSD Core 2 (dBm/500kHz)	-5.72	-4.61	-4.98
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.42	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58	27.58
Conducted PSD Result (dBm/500kHz)	-0.97	-0.26	-0.25

Table 282 - 802.11ac / VHT40 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Raw Conducted PSD (dBm/500kHz)	-9.46	-7.72
Duty Cycle Correction (dB)	0.18	0.18
Antenna Directional Gain (dBi)	6.20	5.10
15.407 Conducted PSD Limit (dBm/500kHz)	29.80	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	29.80	30.00
Conducted PSD Result (dBm/500kHz)	-9.27	-7.54

Table 283 - 802.11ac / VHT80 MCS0x1 / SISO / Core0

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.11	-7.53
Conducted PSD Core 1 (dBm/500kHz)	-9.18	-6.85
Duty Cycle Correction (dB)	0.20	0.18
Antenna Directional Gain (dBi)	7.88	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74
Conducted PSD Result (dBm/500kHz)	-5.93	-3.99

Table 284 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1



Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.24	-7.97
Conducted PSD Core 1 (dBm/500kHz)	-9.01	-7.25
Duty Cycle Correction (dB)	0.34	0.34
Antenna Directional Gain (dBi)	4.99	4.29
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-5.77	-4.24

Table 285 - 802.11ac / VHT80 MCS0x2 / MIMO SDM / Cores 0+1

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.76	-7.65
Conducted PSD Core 1 (dBm/500kHz)	-9.46	-7.74
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	7.88	7.26
15.407 Conducted PSD Limit (dBm/500kHz)	28.12	28.74
RSS-247 Conducted PSD Limit (dBm/500kHz)	28.12	28.74
Conducted PSD Result (dBm/500kHz)	-6.60	-4.68

Table 286 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.82	-6.97
Conducted PSD Core 1 (dBm/500kHz)	-9.40	-7.64
Conducted PSD Core 2 (dBm/500kHz)	-9.62	-8.02
Duty Cycle Correction (dB)	0.18	0.18
Antenna Directional Gain (dBi)	8.87	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58
Conducted PSD Result (dBm/500kHz)	-4.65	-2.57

Table 287 - 802.11ac / VHT80 MCS0x1 / MIMO CDD / Cores 0+1+2



Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.77	-7.92
Conducted PSD Core 1 (dBm/500kHz)	-9.86	-7.17
Conducted PSD Core 2 (dBm/500kHz)	-9.96	-7.20
Duty Cycle Correction (dB)	0.43	0.42
Antenna Directional Gain (dBi)	4.26	3.72
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-4.67	-2.22

Table 288 - 802.11ac / VHT80 MCS0x3 / MIMO SDM / Cores 0+1+2

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Conducted PSD Core 0 (dBm/500kHz)	-9.65	-7.56
Conducted PSD Core 1 (dBm/500kHz)	-9.25	-7.59
Conducted PSD Core 2 (dBm/500kHz)	-9.24	-7.81
Duty Cycle Correction (dB)	N/A SA-3	N/A SA-3
Antenna Directional Gain (dBi)	8.87	8.42
15.407 Conducted PSD Limit (dBm/500kHz)	27.13	27.58
RSS-247 Conducted PSD Limit (dBm/500kHz)	27.13	27.58
Conducted PSD Result (dBm/500kHz)	-4.61	-2.88

Table 289 - 802.11ac / VHT80 MCS0x1 / MIMO TxBF / Cores 0+1+2

Channel	Straddle	Middle
Frequency (MHz)	5690	5775
Raw Conducted PSD (dBm/500kHz)	-10.30	-7.59
Duty Cycle Correction (dB)	0.16	0.15
Antenna Directional Gain (dBi)	2.30	2.30
15.407 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
RSS-247 Conducted PSD Limit (dBm/500kHz)	30.00	30.00
Conducted PSD Result (dBm/500kHz)	-10.14	-7.44

Table 290 - 802.11ac / VHT80 MCS0x1 / Aux Core



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 291

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1 and 6.2.4.1

Device	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
OEM installed in vehicles	-	-	-	-
Other	≤10 dBm/MHz EIRP	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz

Table 292



2.2.10 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 3.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	13-Jun-2020
Hygrometer	Rotronic	I-1000	2891	12	02-Oct-2020
True RMS Multimeter	Fluke	179	4007	12	30-Oct-2019
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	6-Feb-2020
USB Power Sensor	Boonton	RTP5006	5184	12	12-Dec-2019
AC Programmable PSU	iTech	IT7324	5227	-	O/P Mon
Power Splitter, 4 way	Mini-Circuits	ZN4PD1-63-S+	5235	-	O/P Mon
Power Splitter, 4 way	Mini-Circuits	ZN4PD1-63-S+	5236	-	O/P Mon
Power Splitter, 2 way	Mini-Circuits	ZN2PD2-63-S+	5238	-	O/P Mon
Power splitter, 2 port	Mini-Circuits	ZN2PD-63-S+	4742	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon
Attenuator 10dB 2W	Telegartner	J01156A0031	N/A	-	O/P Mon

Table 293

O/P Mon – Output Monitored using Calibrated Equipment.



2.3 Emission Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2
ISED RSS-GEN, Clause 6.7

2.3.2 Equipment Under Test and Modification State

A2141, S/N: C02YT007L513 - Modification State 0

2.3.3 Date of Test

15 August 2019 to 19 September 2019

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.4.1 and 12.4.2, KDB 789033 D02 section C, and ISDEC RSS-GEN, Clause 4.6.1 and 4.6.2

For modes of operation using multiple cores, measurements were made on each core but only the worst case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99% occupied bandwidth.

2.3.5 Environmental Conditions

Ambient Temperature	19.3 - 26.1°C
Relative Humidity	39.0 - 67.9%



2.3.6 Test Results: U-NII-1

Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.900	21.900	21.840
99% Bandwidth (MHz)	16.680	16.669	16.729

Table 294 - 802.11a / 6 Mbps / SISO / Core0 / Country Code US

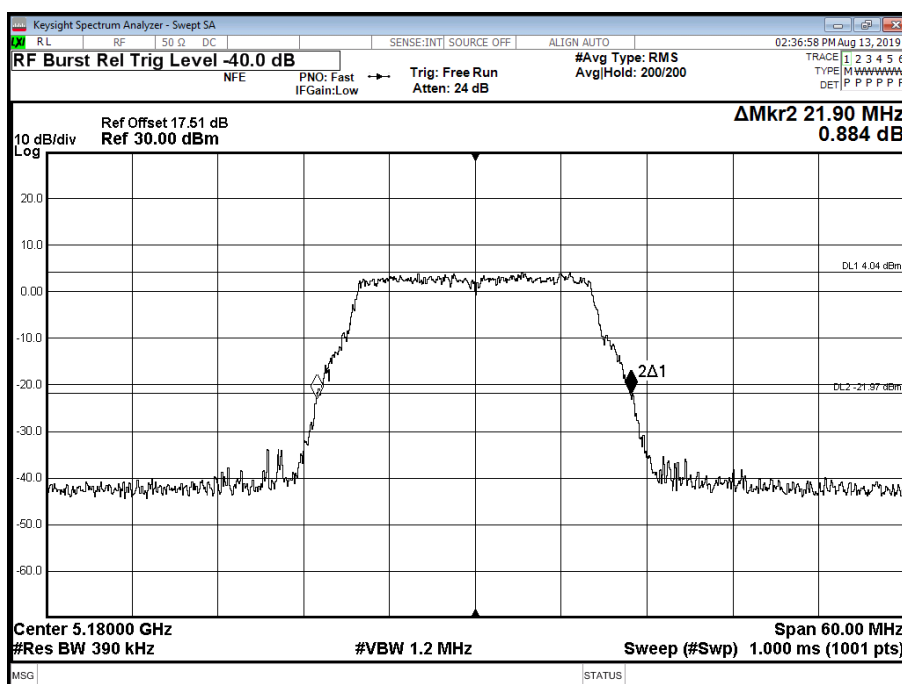


Figure 1 - 5180 MHz - 26 dB Emission Bandwidth

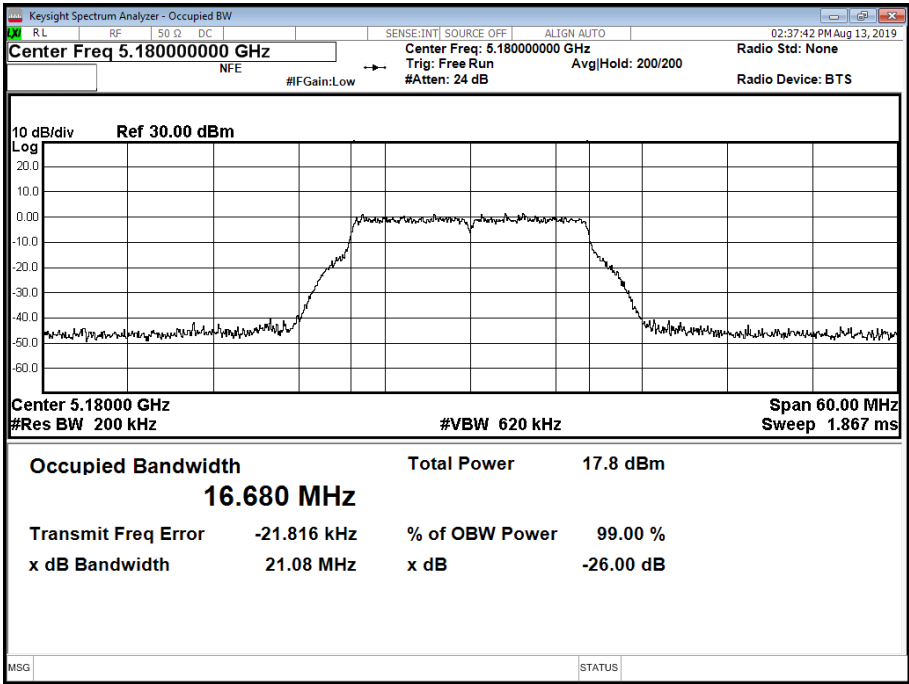


Figure 2 - 5180 MHz - 99% Occupied Bandwidth

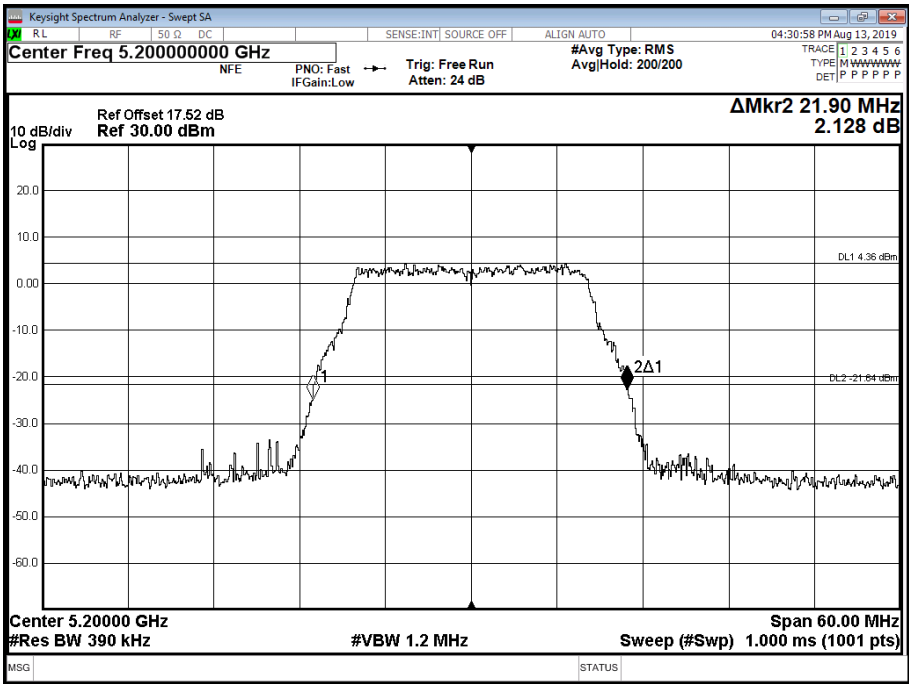


Figure 3 - 5200 MHz - 26 dB Emission Bandwidth

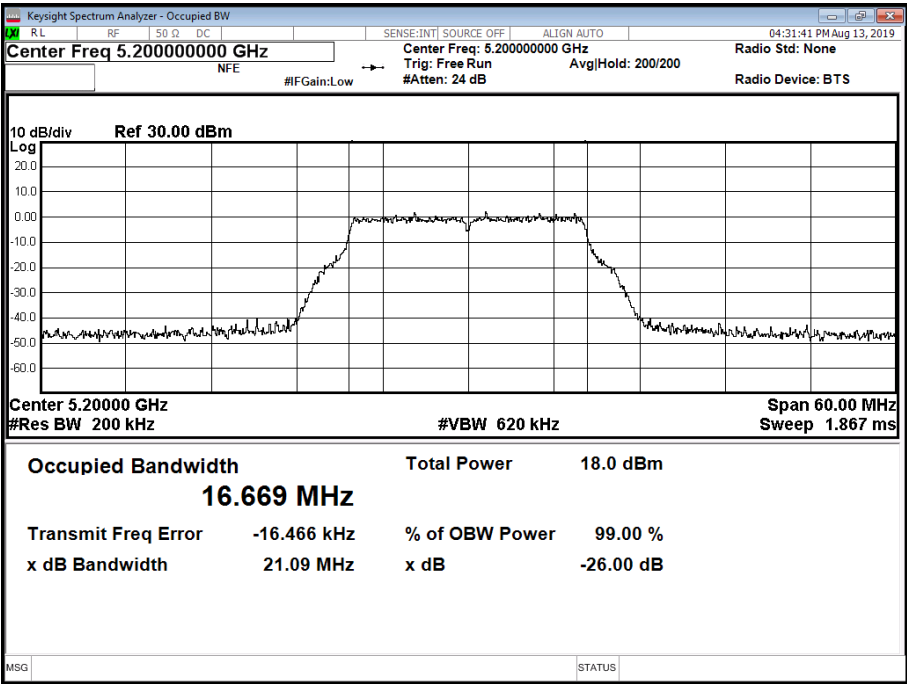


Figure 4 - 5200 MHz - 99% Occupied Bandwidth

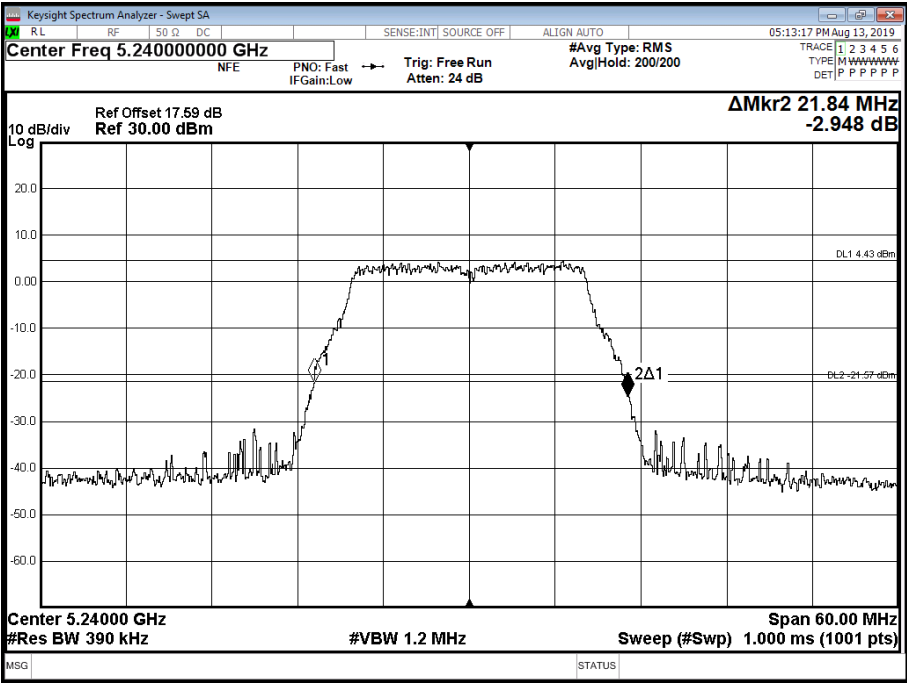


Figure 5 - 5240 MHz - 26 dB Emission Bandwidth

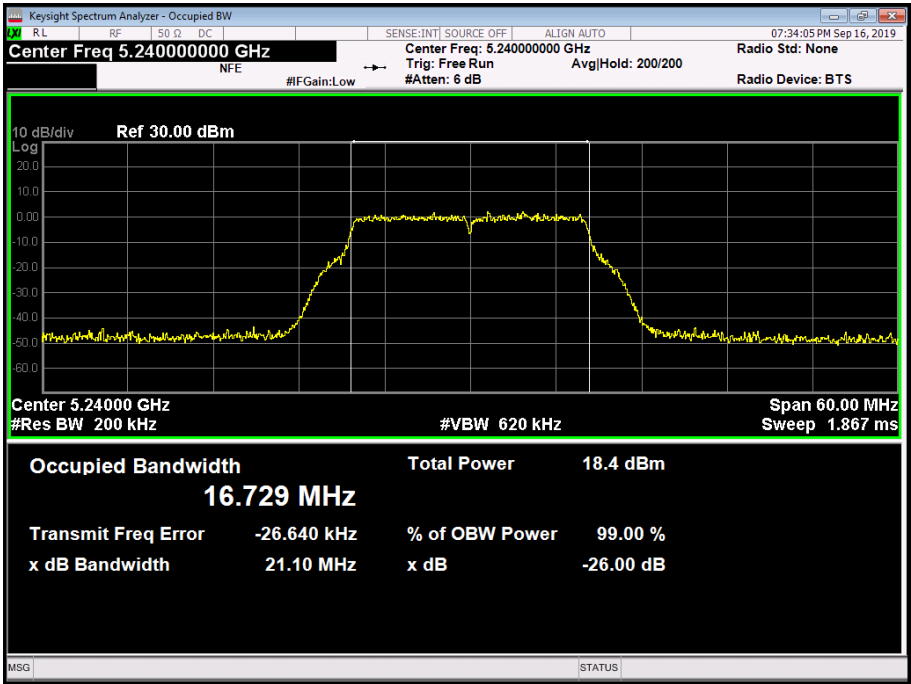


Figure 6 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.960	21.900	21.780
99% Bandwidth (MHz)	16.660	16.678	16.663

Table 295 - 802.11a / 6 Mbps / SISO / Core0 / Country Code CA

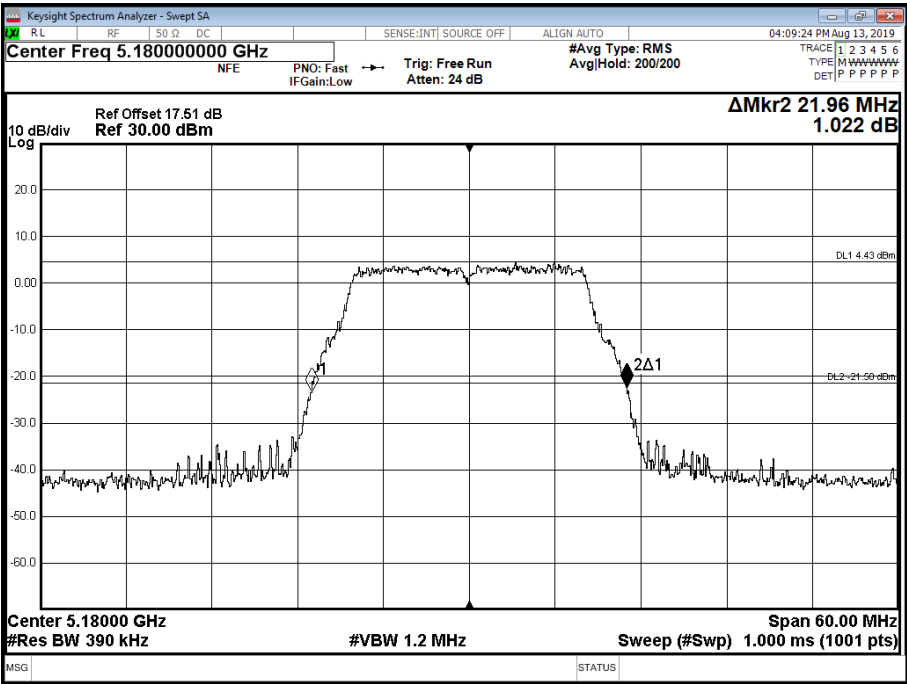


Figure 7 - 5180 MHz - 26 dB Emission Bandwidth

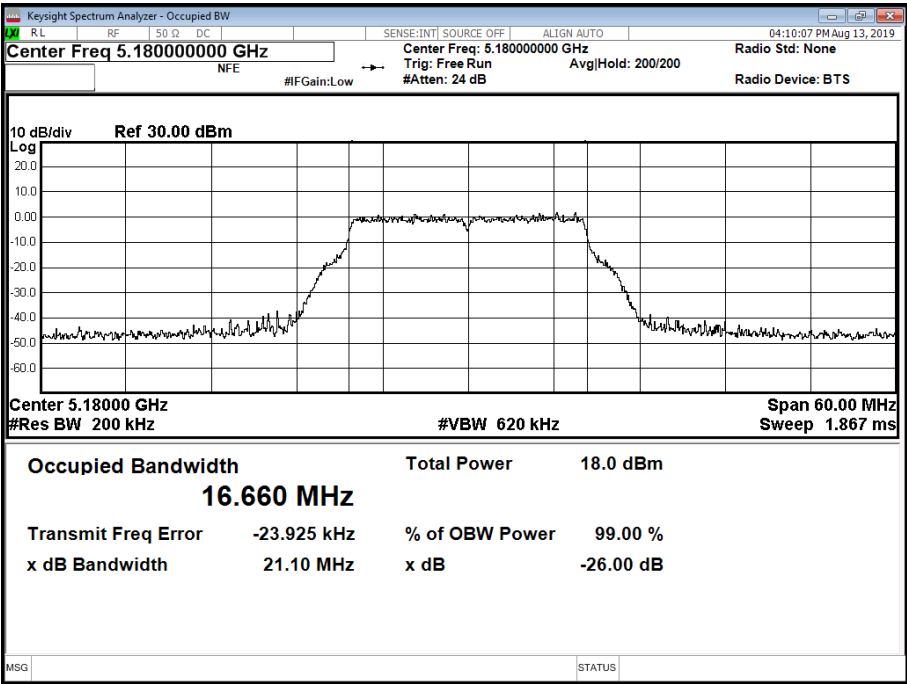


Figure 8 - 5180 MHz - 99% Occupied Bandwidth

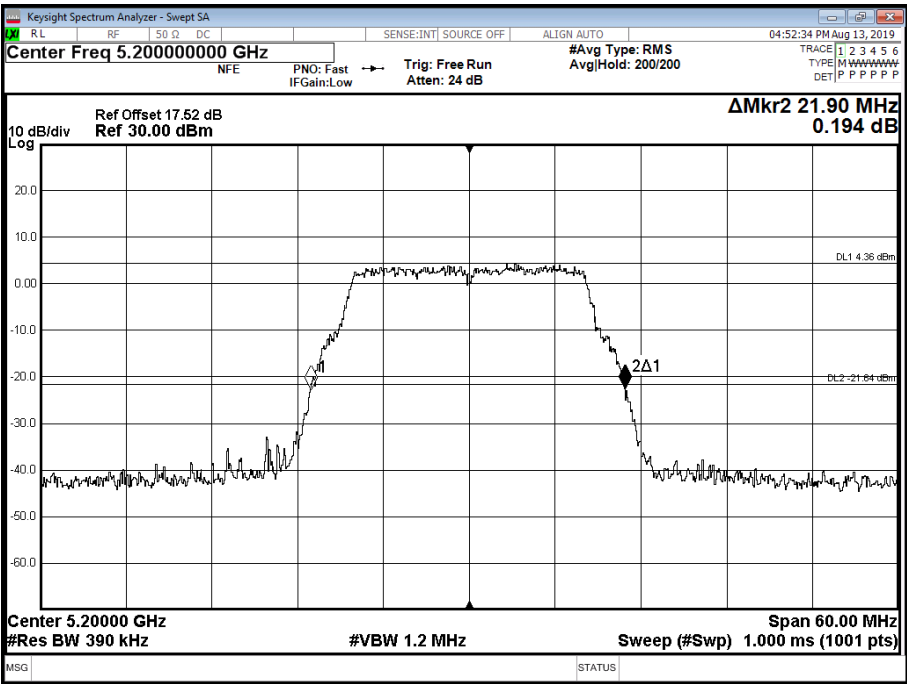


Figure 9 - 5200 MHz - 26 dB Emission Bandwidth

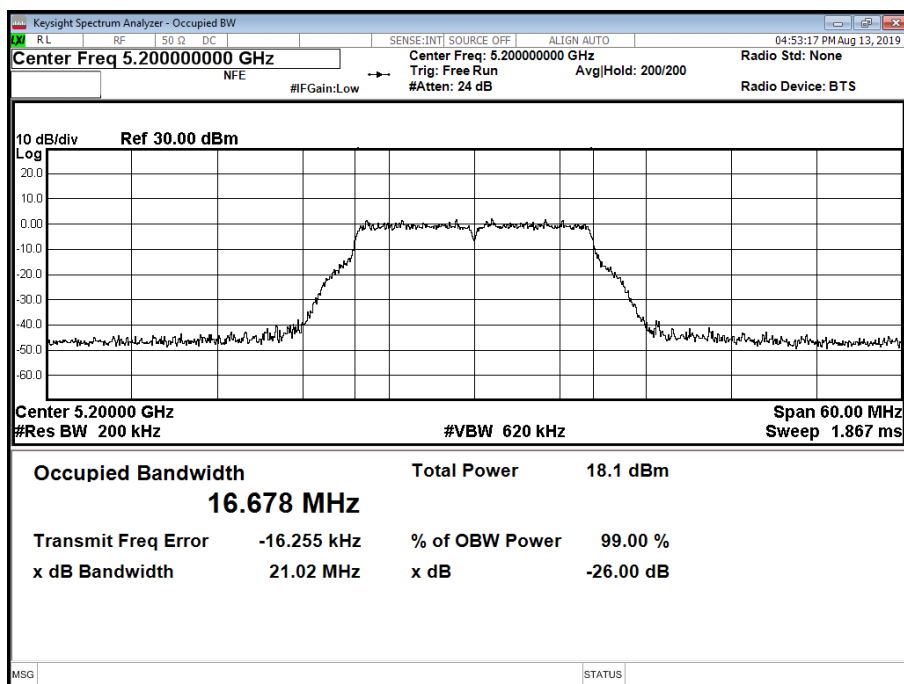


Figure 10 - 5200 MHz - 99% Occupied Bandwidth

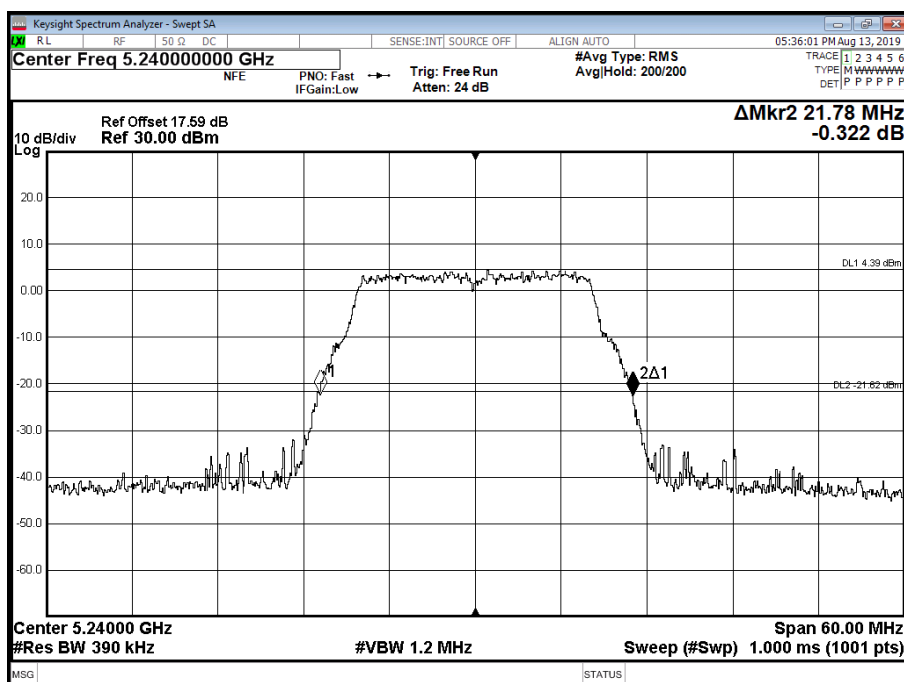


Figure 11 - 5240 MHz - 26 dB Emission Bandwidth

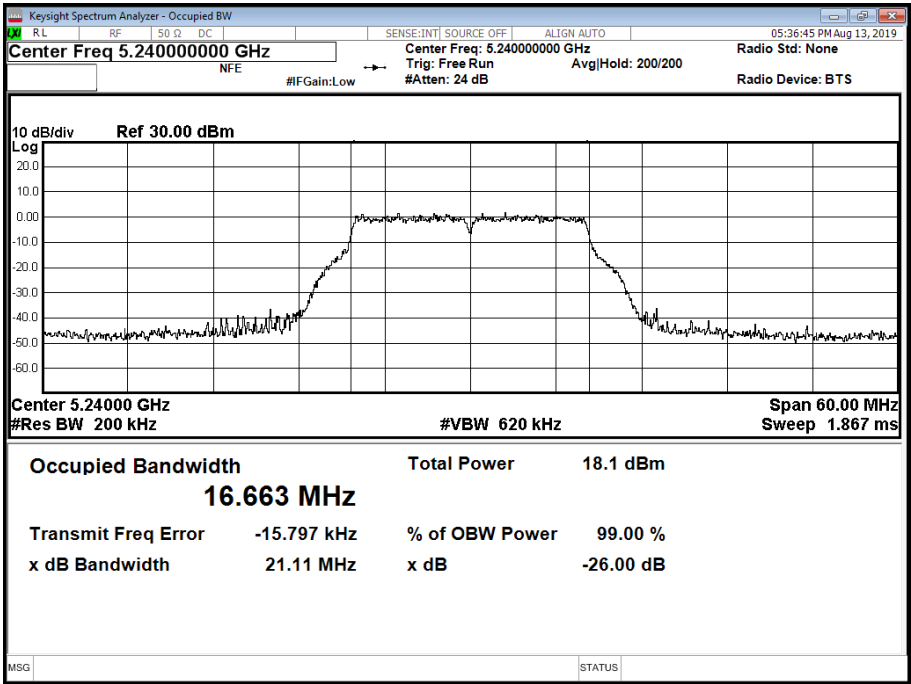


Figure 12 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.840	21.960	21.960
99% Bandwidth (MHz)	16.713	16.693	16.665

Table 296 - 802.11a / 6 Mbps / Aux Core / Country Code US

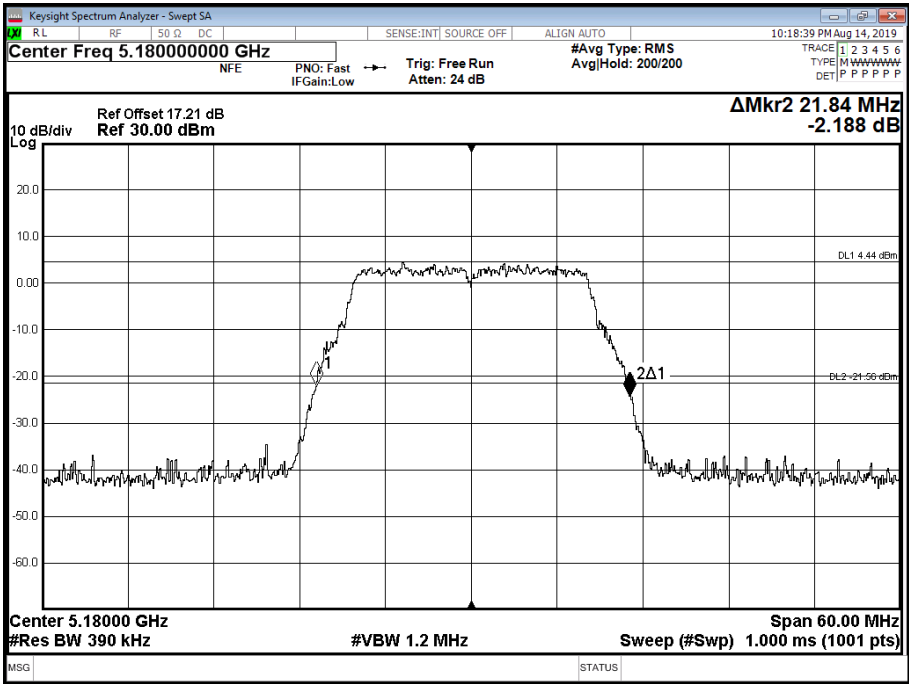


Figure 13 - 5180 MHz - 26 dB Emission Bandwidth

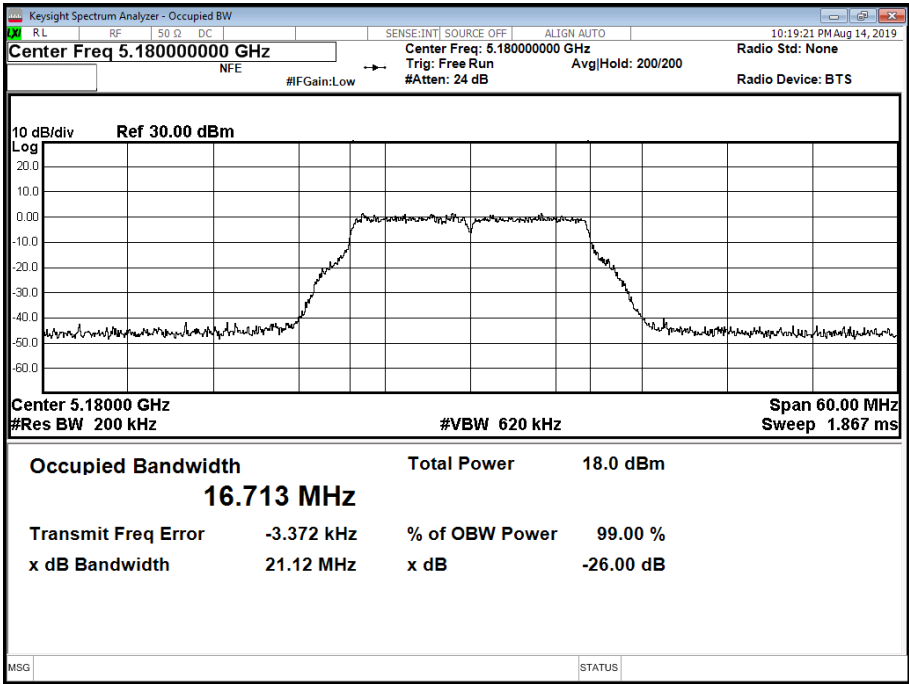


Figure 14 - 5180 MHz - 99% Occupied Bandwidth

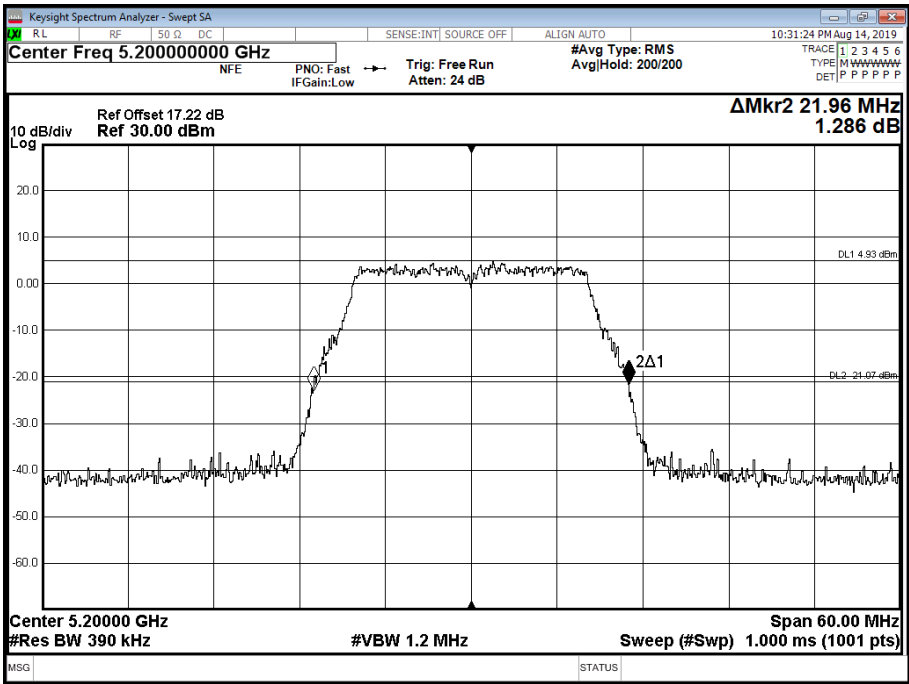


Figure 15 - 5200 MHz - 26 dB Emission Bandwidth

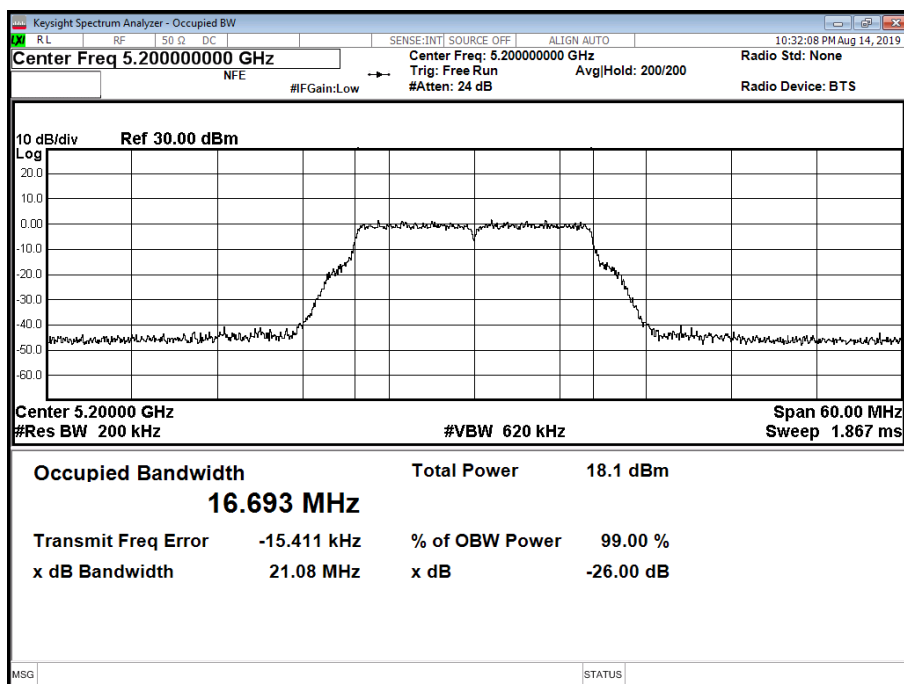


Figure 16 - 5200 MHz - 99% Occupied Bandwidth

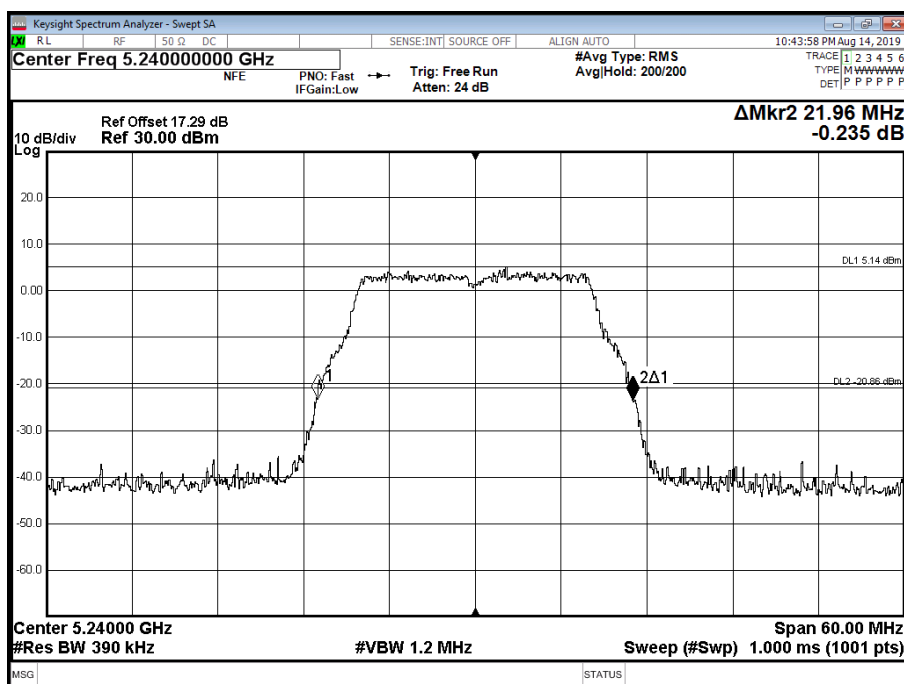


Figure 17 - 5240 MHz - 26 dB Emission Bandwidth

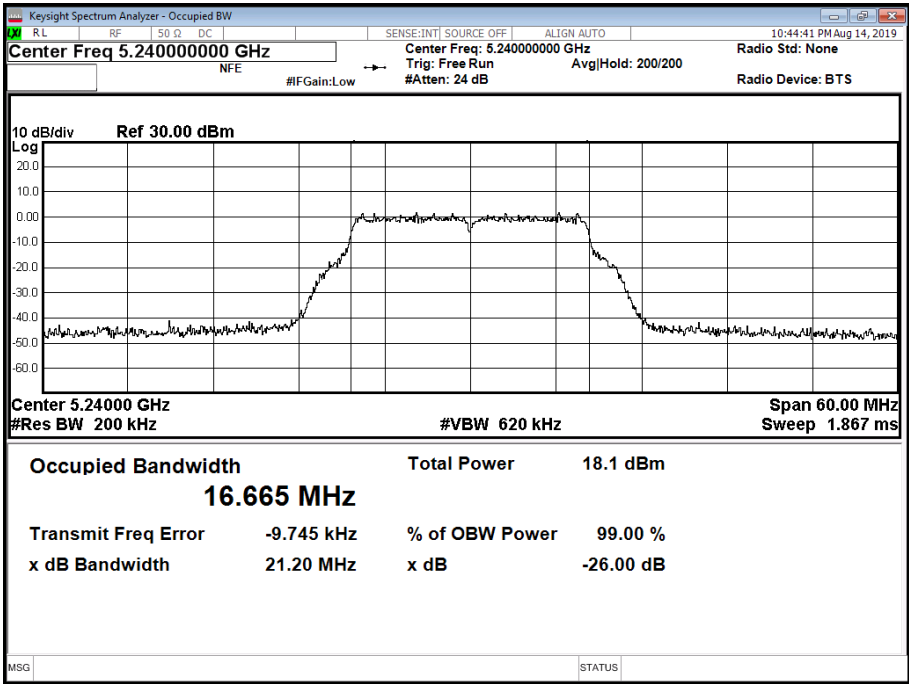


Figure 18 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.780	21.840	21.840
99% Bandwidth (MHz)	16.718	16.705	16.673

Table 297 - 802.11a / 6 Mbps / Aux Core / Country Code CA

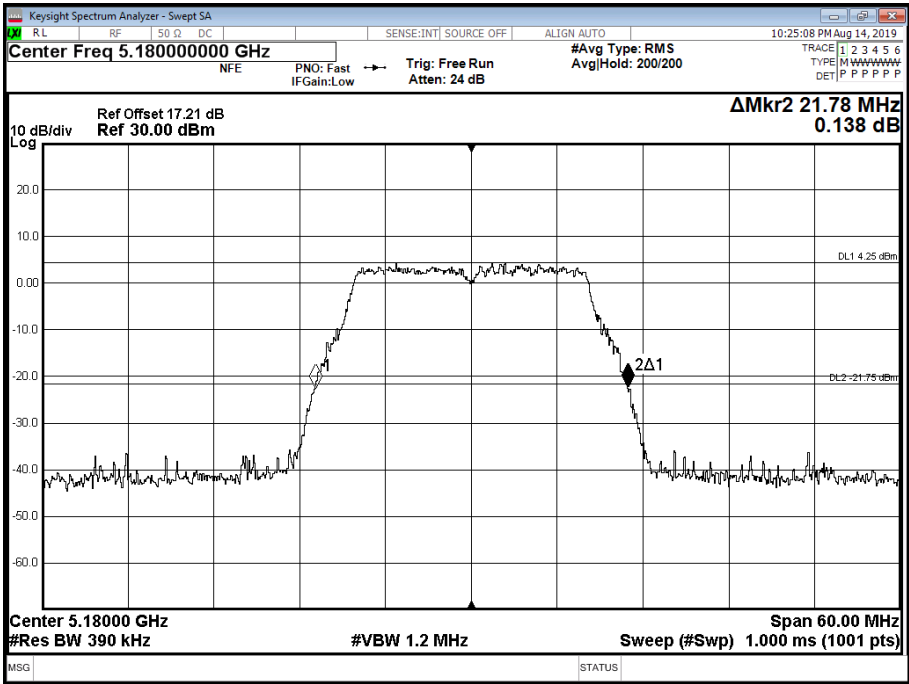


Figure 19 - 5180 MHz - 26 dB Emission Bandwidth

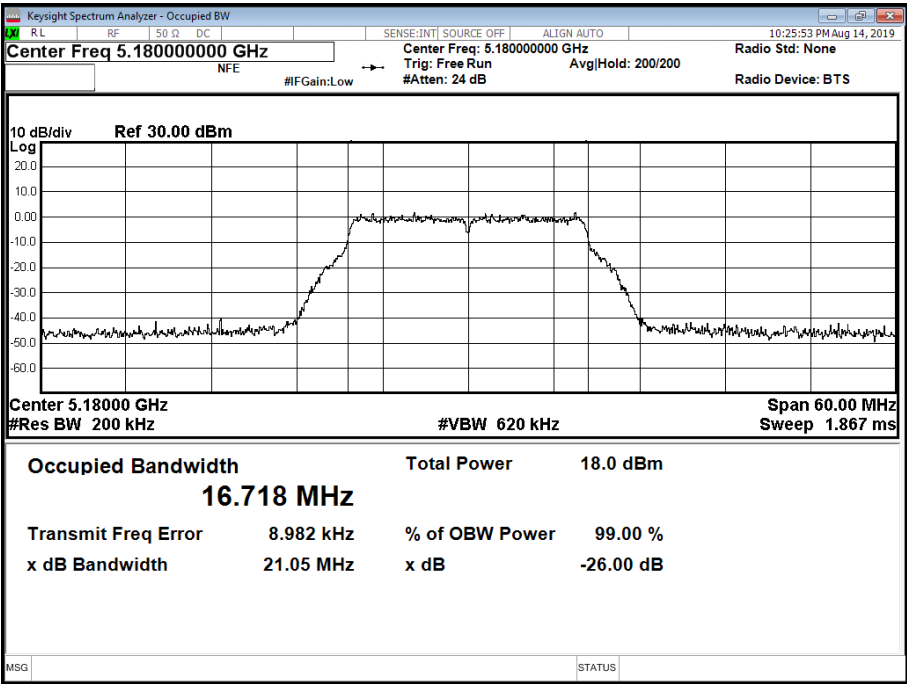


Figure 20 - 5180 MHz - 99% Occupied Bandwidth

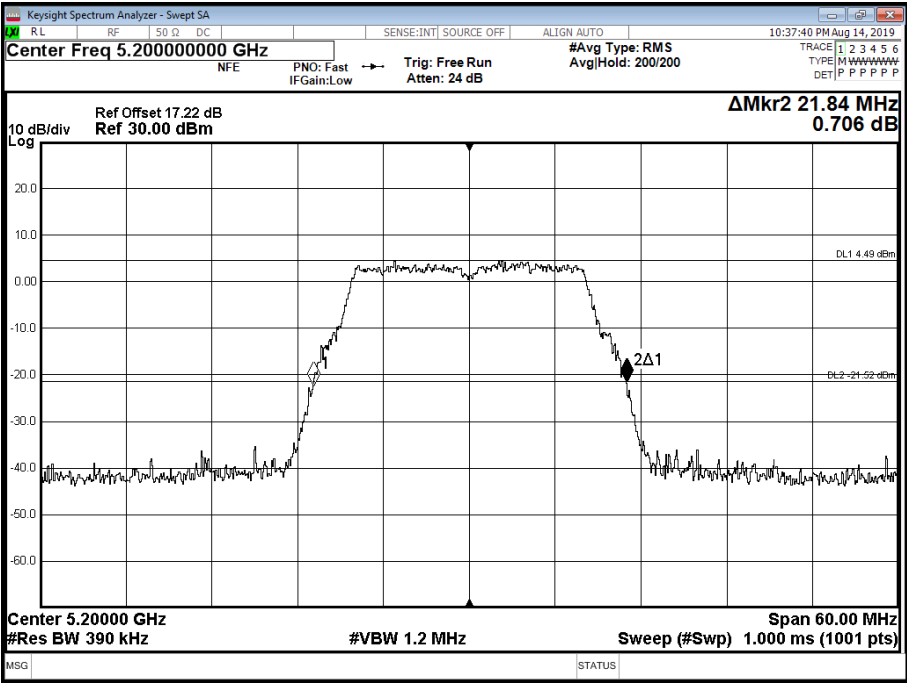


Figure 21 - 5200 MHz - 26 dB Emission Bandwidth

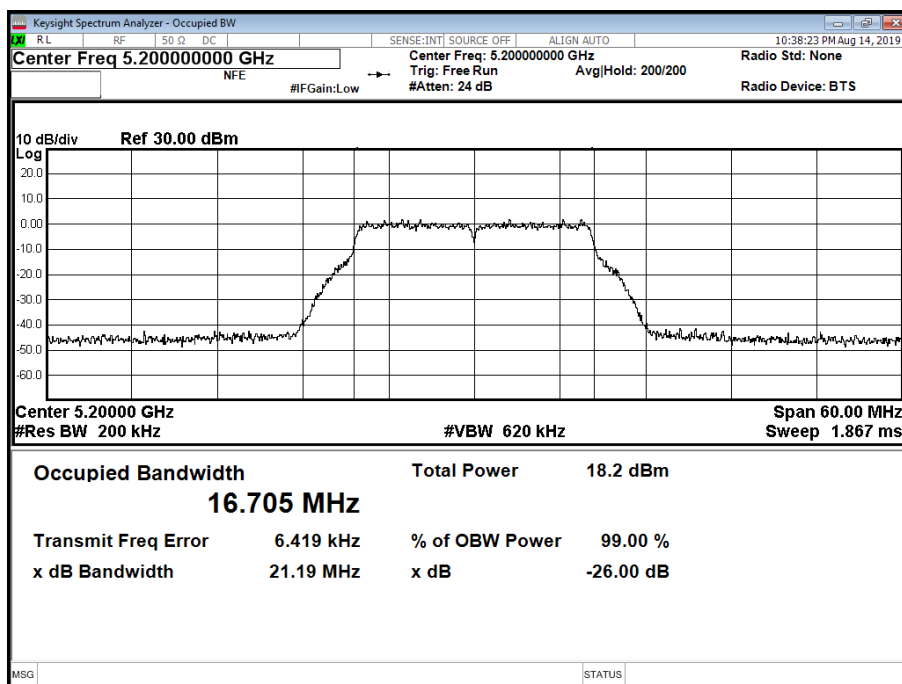


Figure 22 - 5200 MHz - 99% Occupied Bandwidth

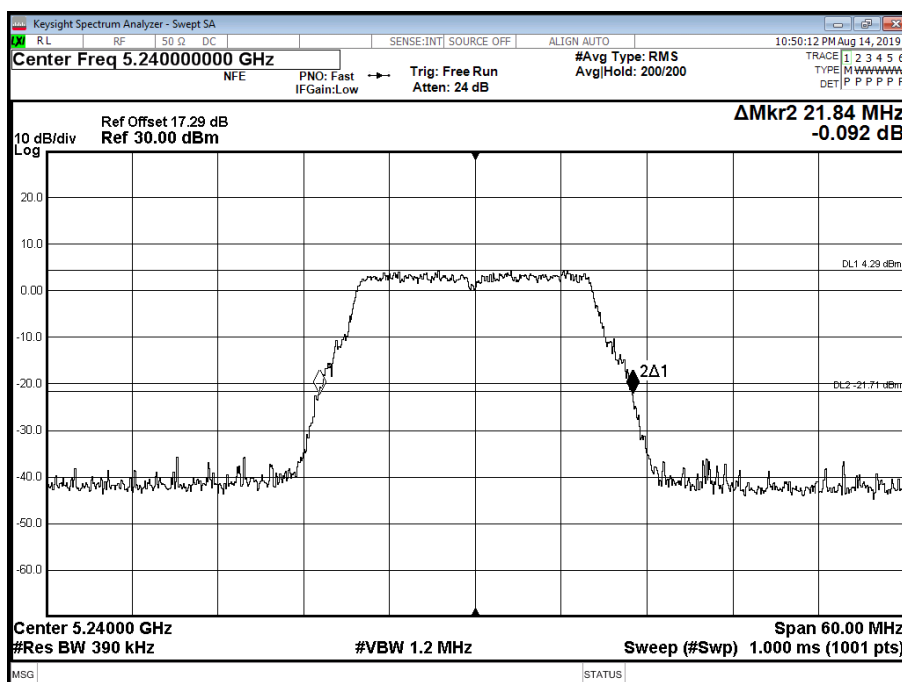


Figure 23 - 5240 MHz - 26 dB Emission Bandwidth

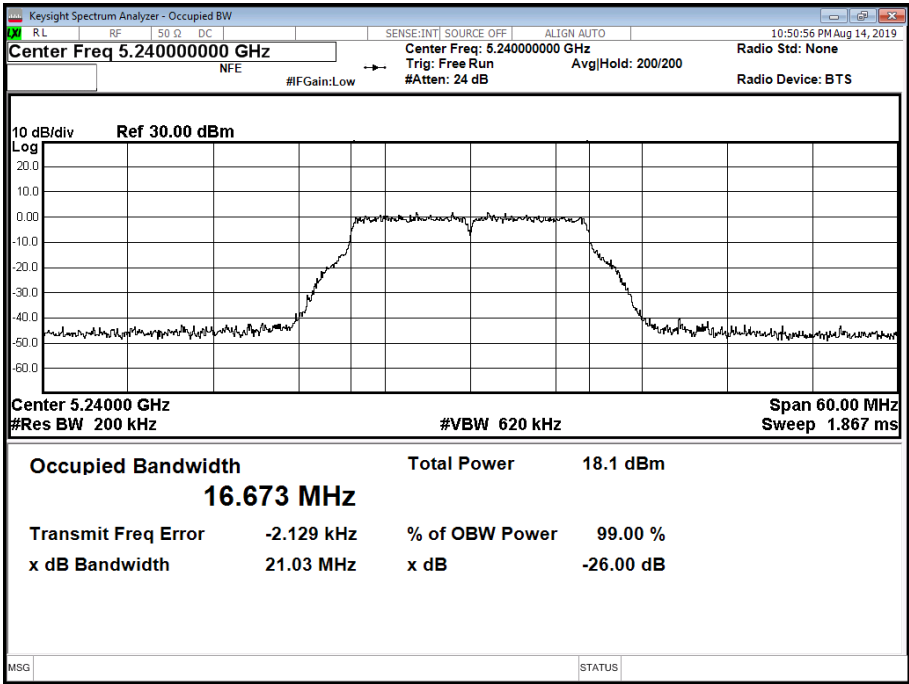


Figure 24 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.080	22.200	22.080
99% Bandwidth (MHz)	17.826	17.891	17.832

Table 298 - 802.11n / HT20 MCS0 / SISO / Core0 / Country Code US

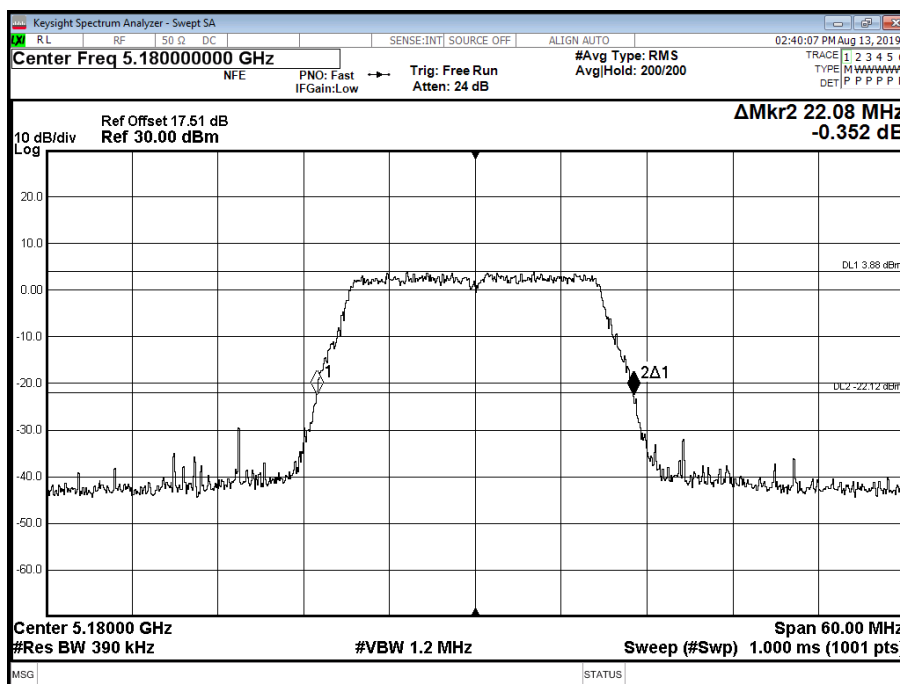


Figure 25 - 5180 MHz - 26 dB Emission Bandwidth

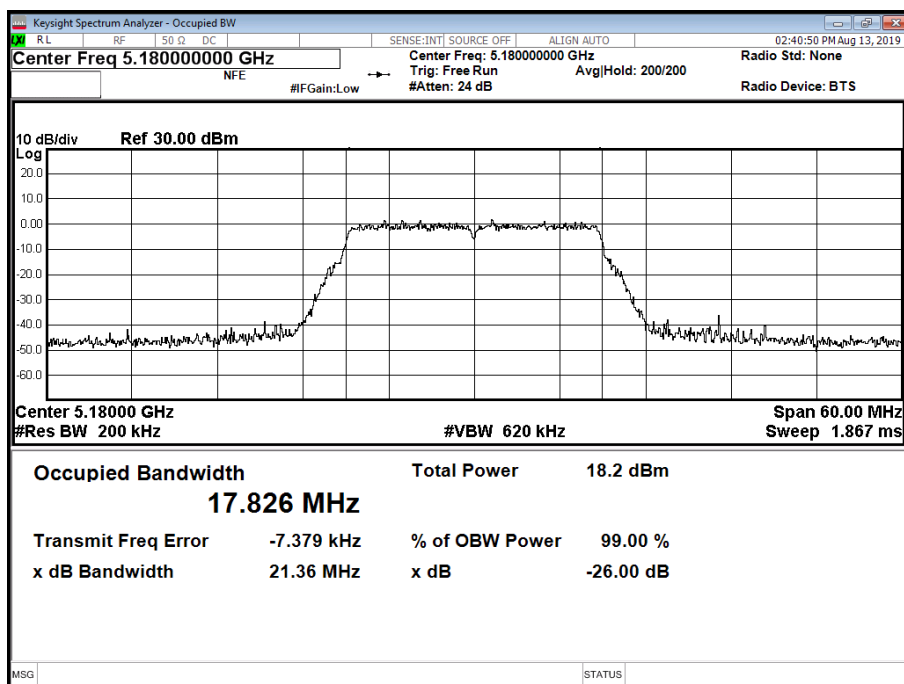


Figure 26 - 5180 MHz - 99% Occupied Bandwidth

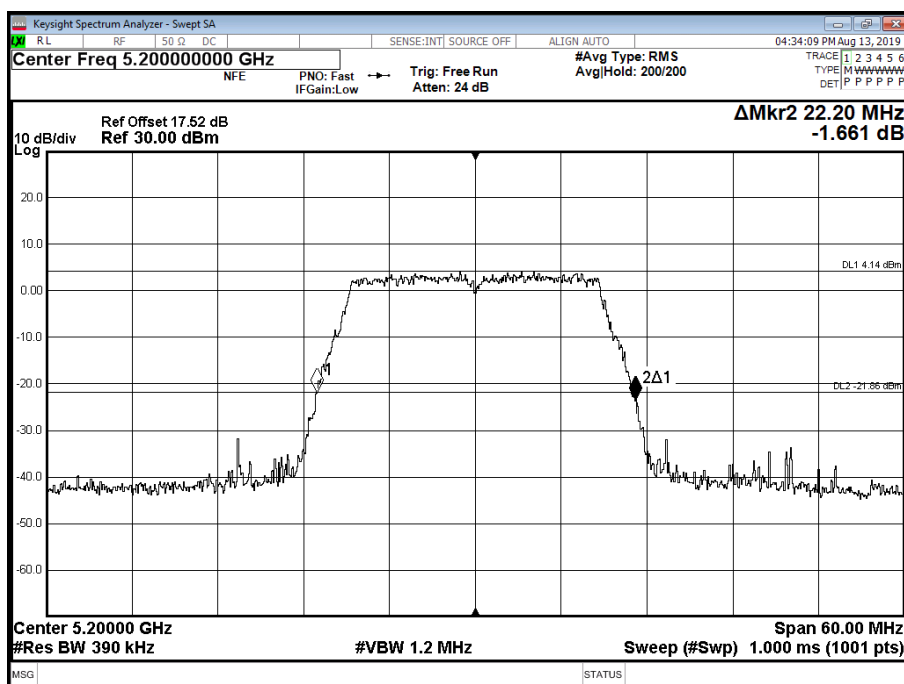


Figure 27 - 5200 MHz - 26 dB Emission Bandwidth

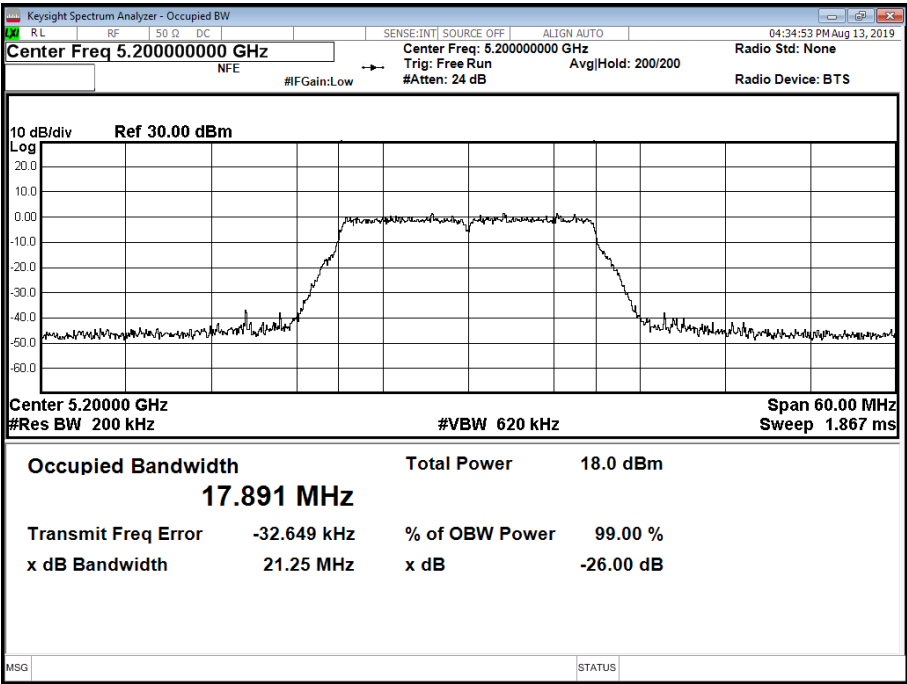


Figure 28 - 5200 MHz - 99% Occupied Bandwidth

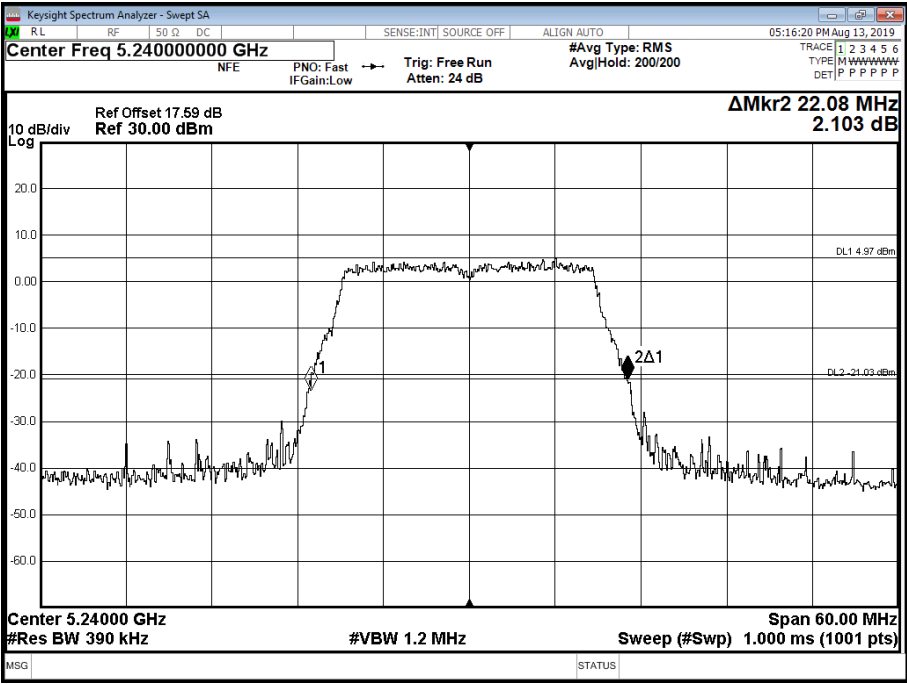


Figure 29 - 5240 MHz - 26 dB Emission Bandwidth

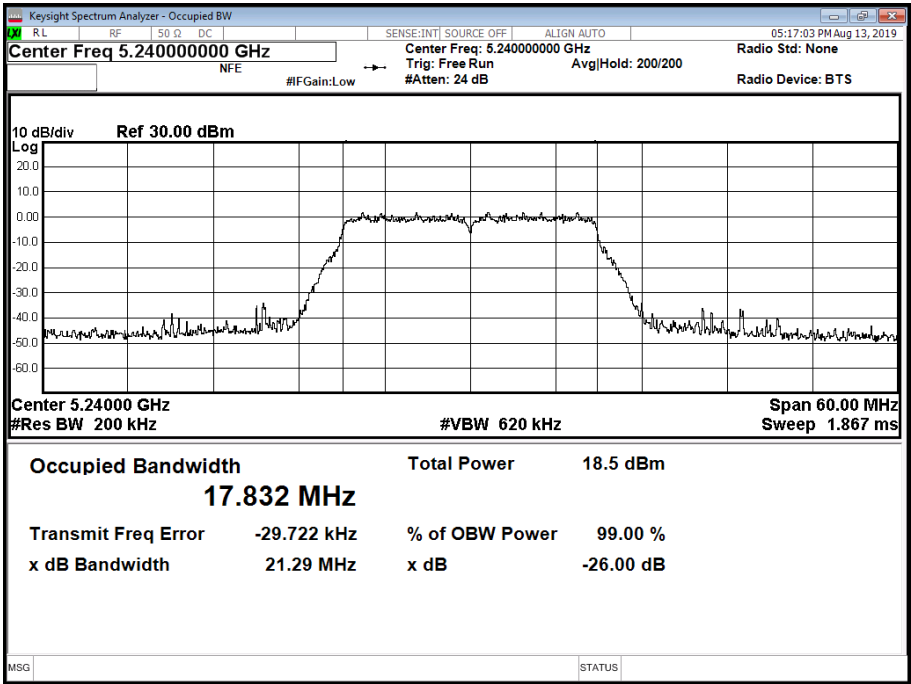


Figure 30 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.960	22.200	22.200
99% Bandwidth (MHz)	17.822	17.836	17.868

Table 299 - 802.11n / HT20 MCS0 / SISO / Core0 / Country Code CA

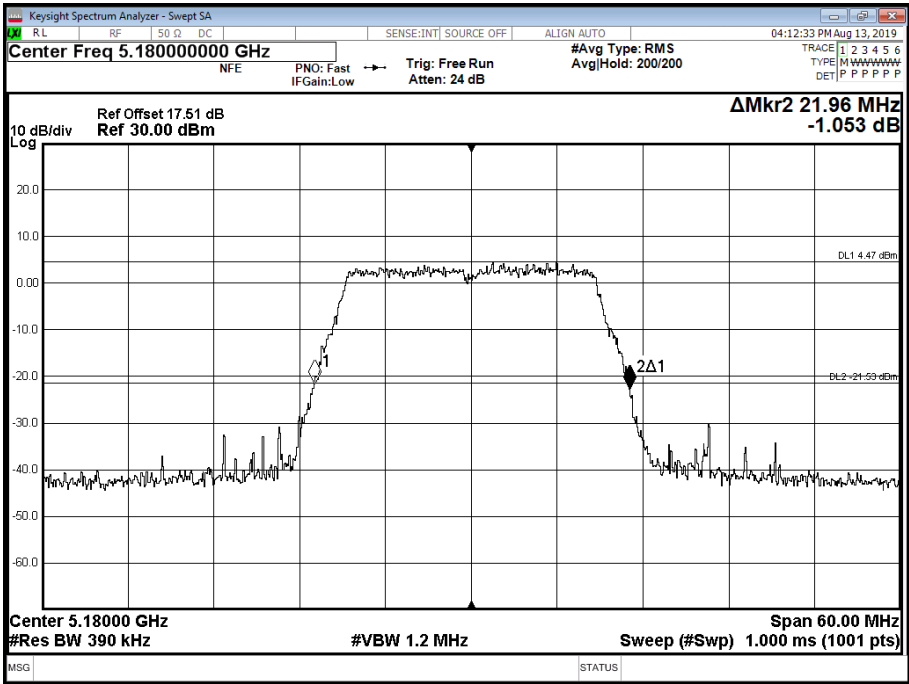


Figure 31 - 5180 MHz - 26 dB Emission Bandwidth

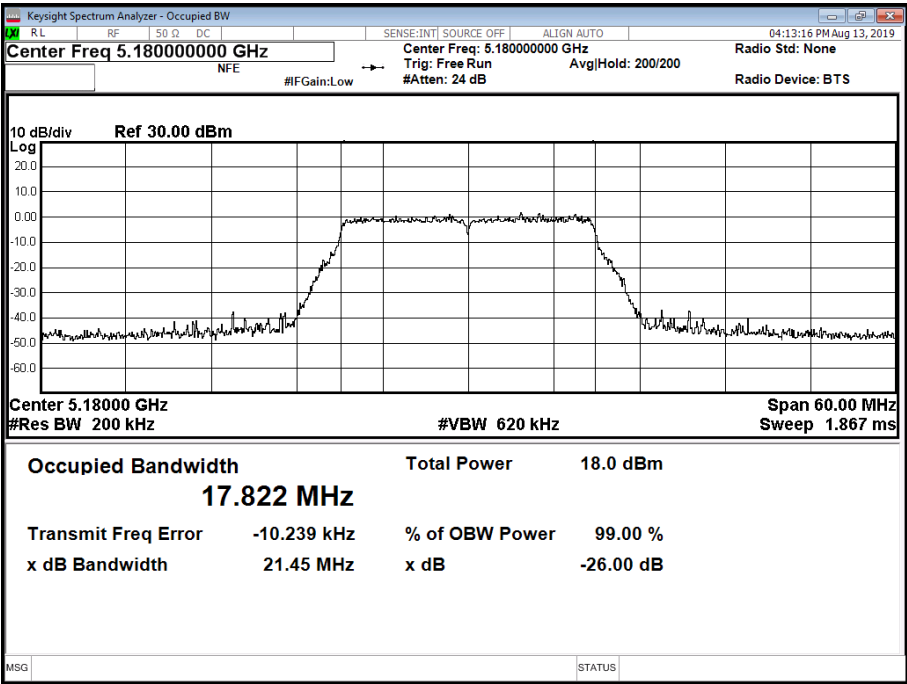


Figure 32 - 5180 MHz - 99% Occupied Bandwidth

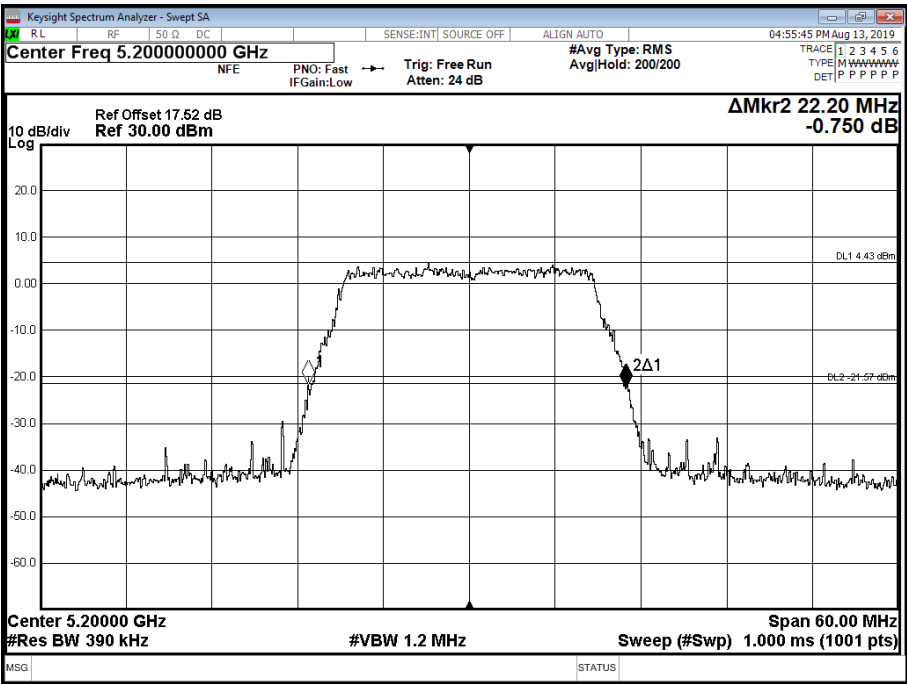


Figure 33 - 5200 MHz - 26 dB Emission Bandwidth

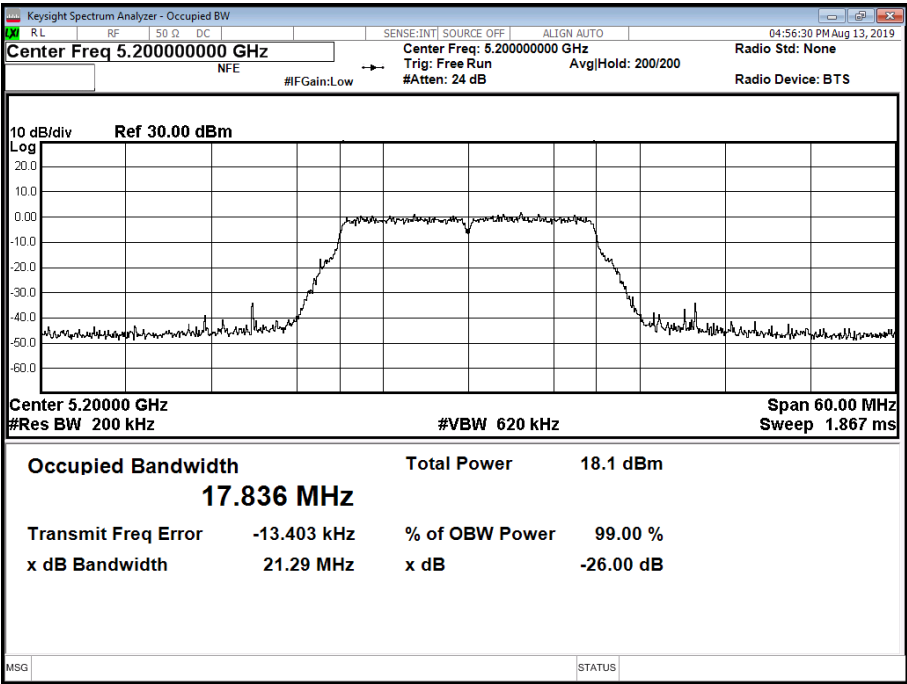


Figure 34 - 5200 MHz - 99% Occupied Bandwidth

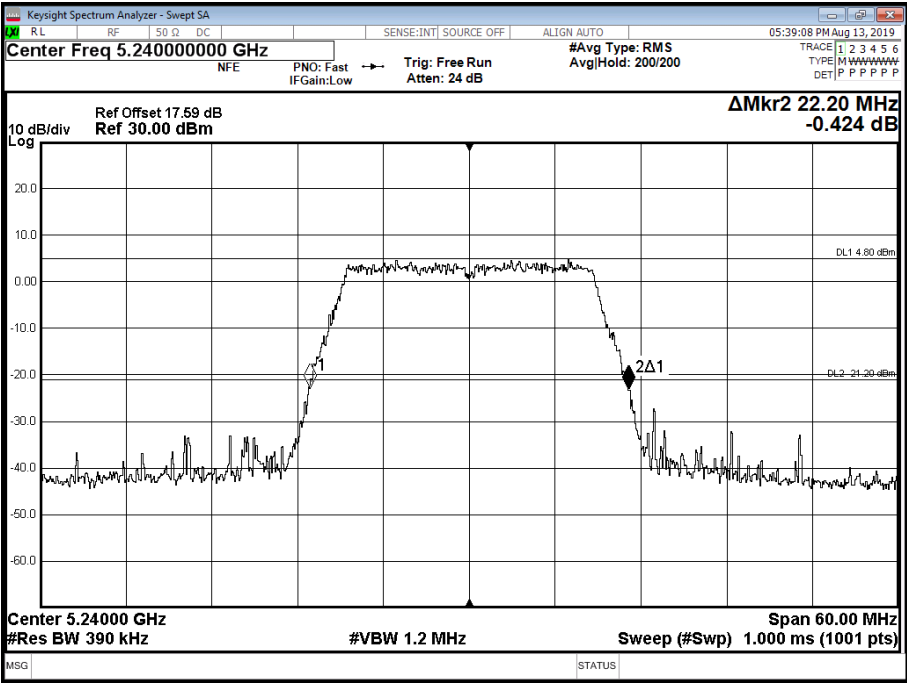


Figure 35 - 5240 MHz - 26 dB Emission Bandwidth

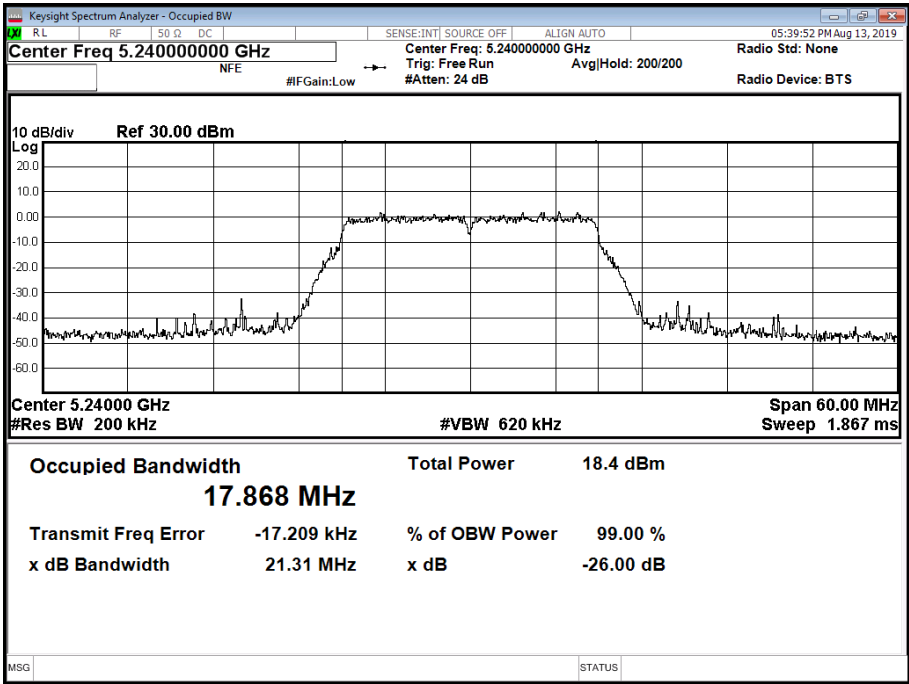


Figure 36 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.840	21.900	22.140
99% Bandwidth (MHz)	17.790	17.836	17.860

Table 300 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code US

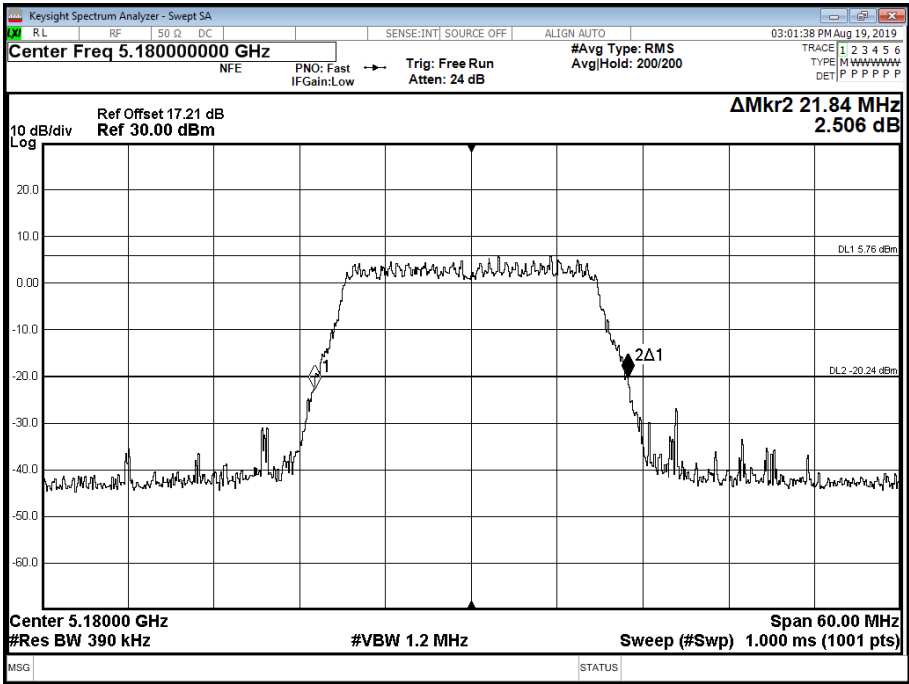


Figure 37 - 5180 MHz - 26 dB Emission Bandwidth

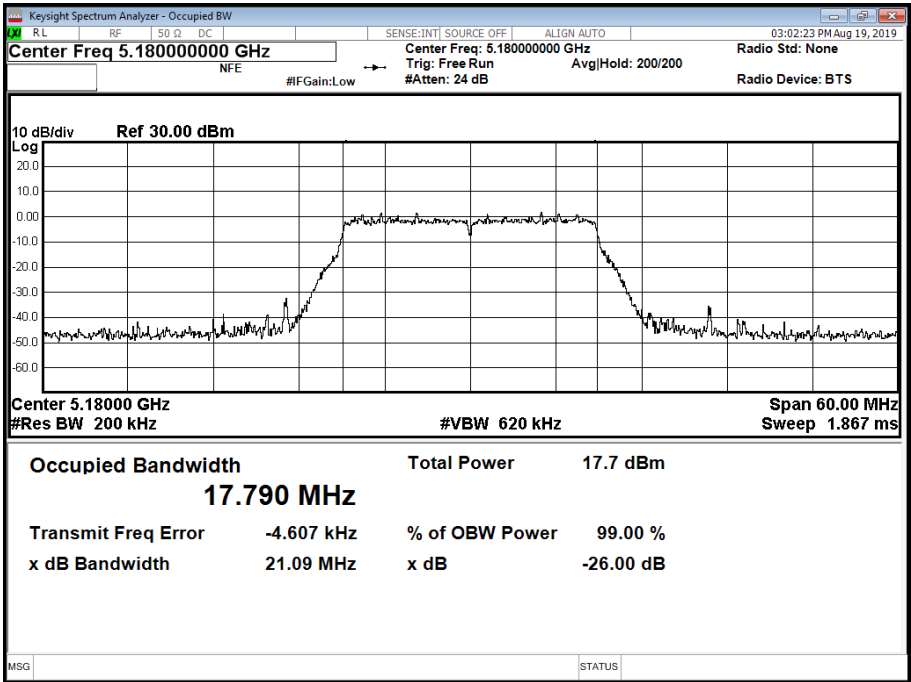


Figure 38 - 5180 MHz - 99% Occupied Bandwidth

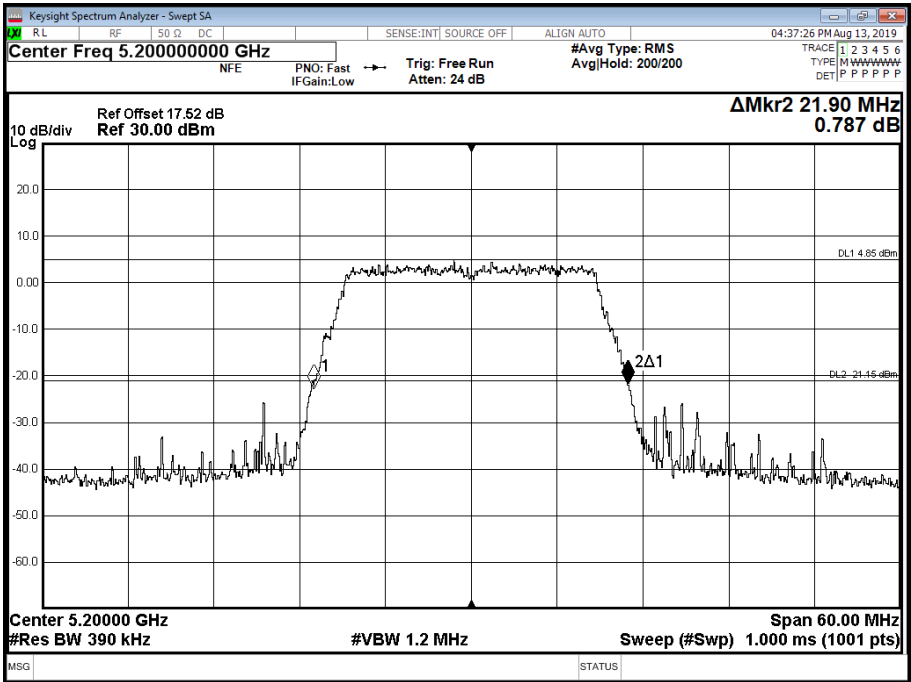


Figure 39 - 5200 MHz - 26 dB Emission Bandwidth

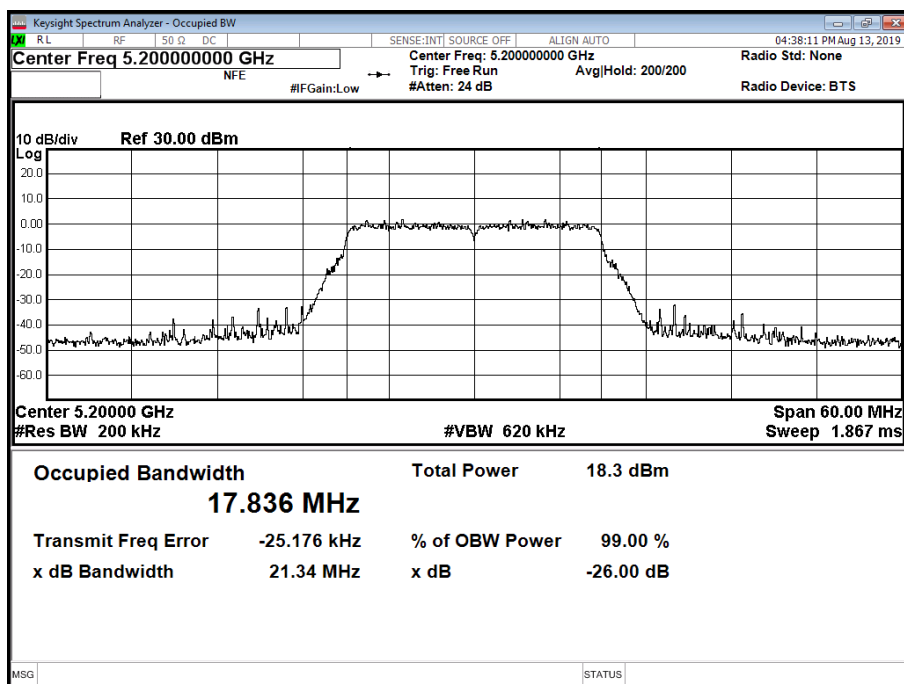


Figure 40 - 5200 MHz - 99% Occupied Bandwidth

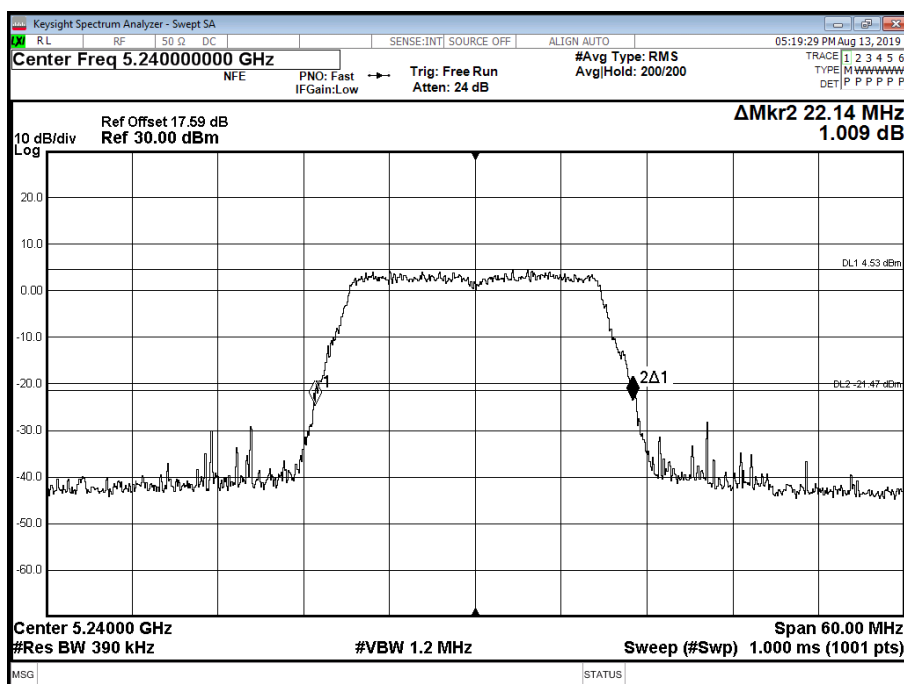


Figure 41 - 5240 MHz - 26 dB Emission Bandwidth

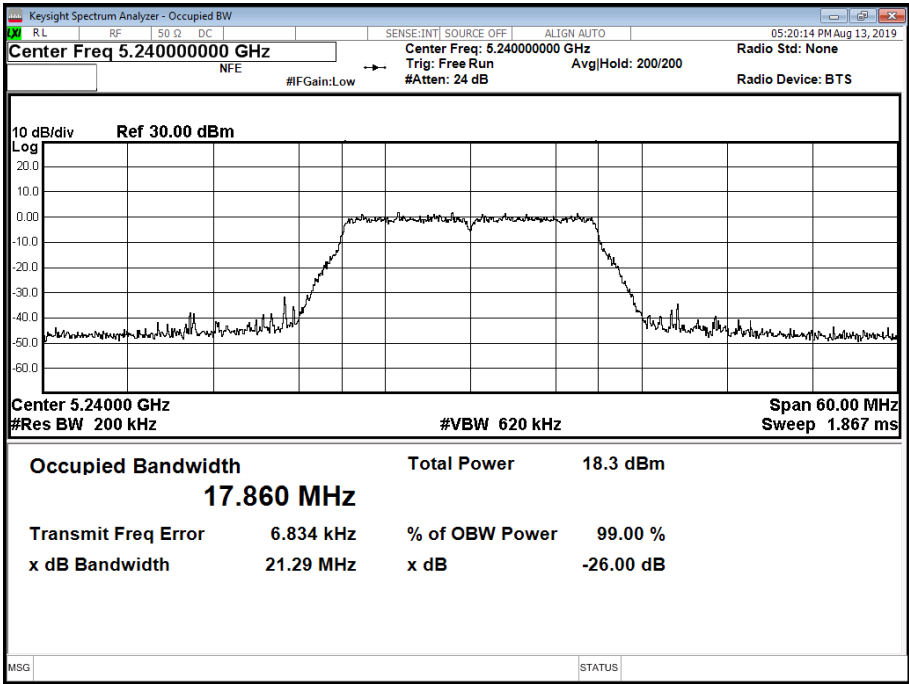


Figure 42 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.320	22.200	22.020
99% Bandwidth (MHz)	17.888	17.856	17.827

Table 301 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1 / Country Code CA

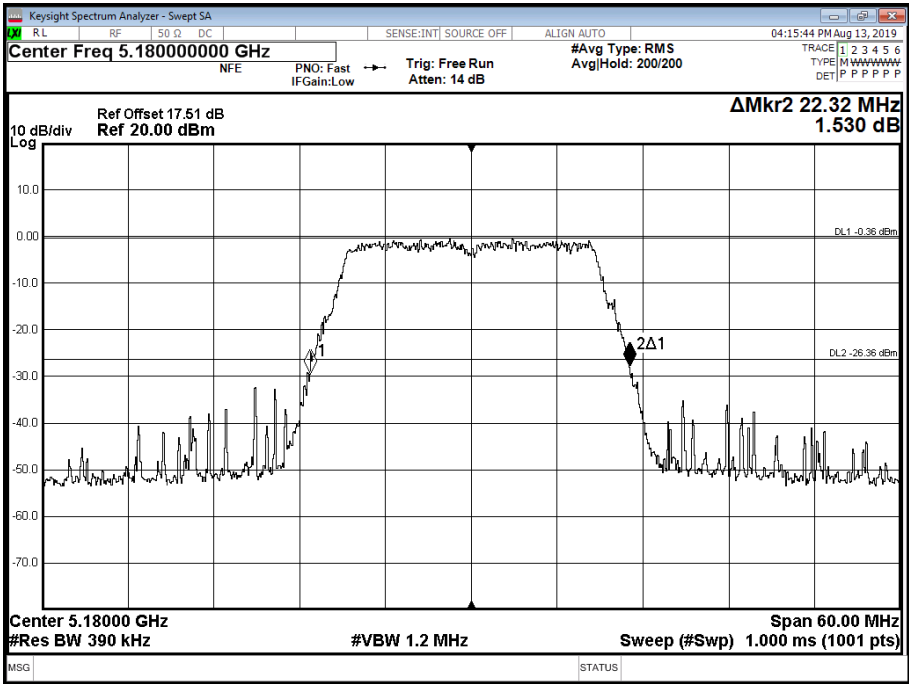


Figure 43 - 5180 MHz - 26 dB Emission Bandwidth

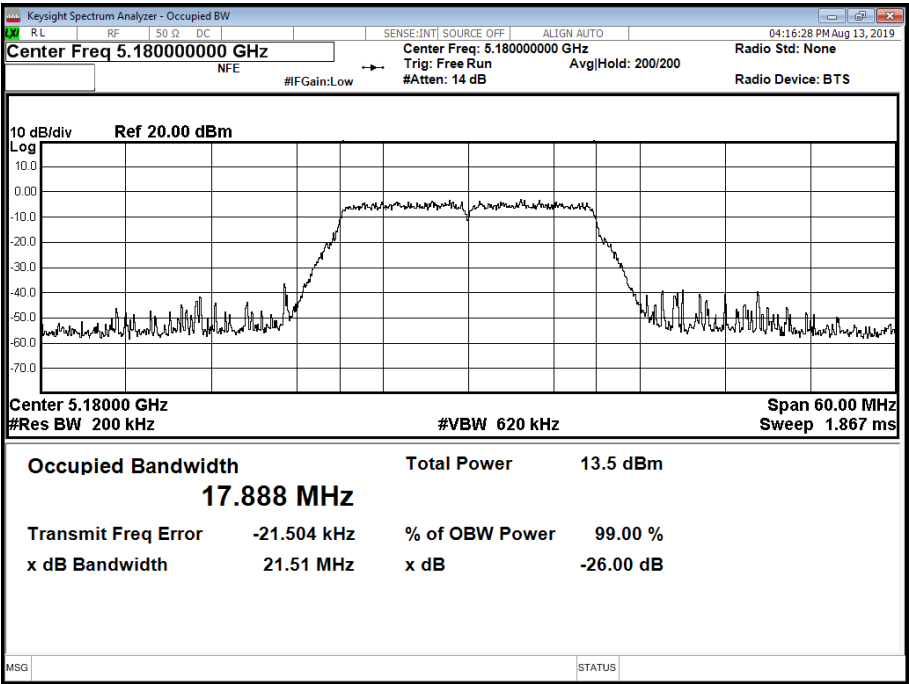


Figure 44 - 5180 MHz - 99% Occupied Bandwidth

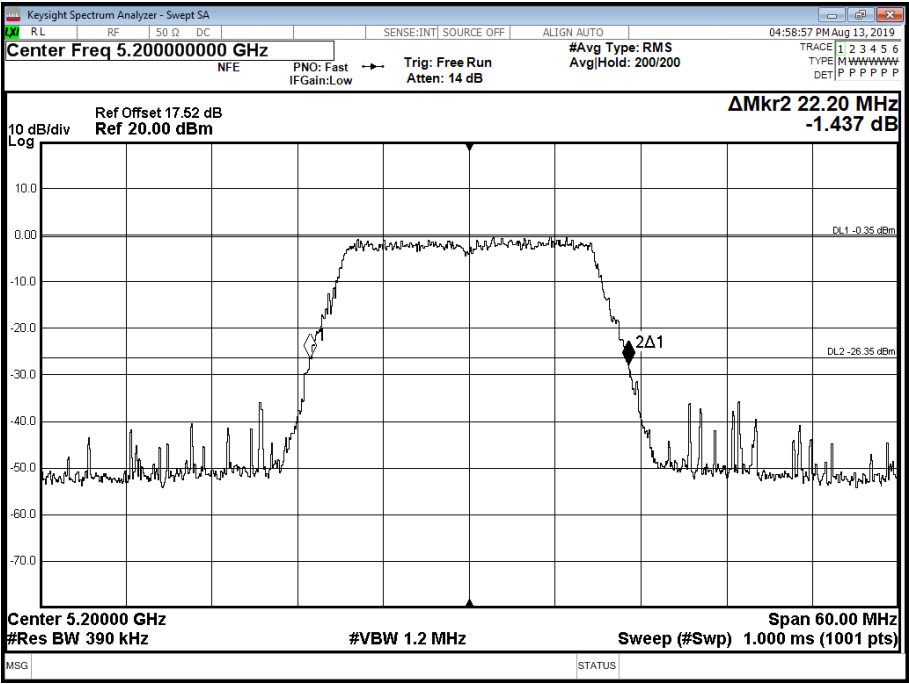


Figure 45 - 5200 MHz - 26 dB Emission Bandwidth

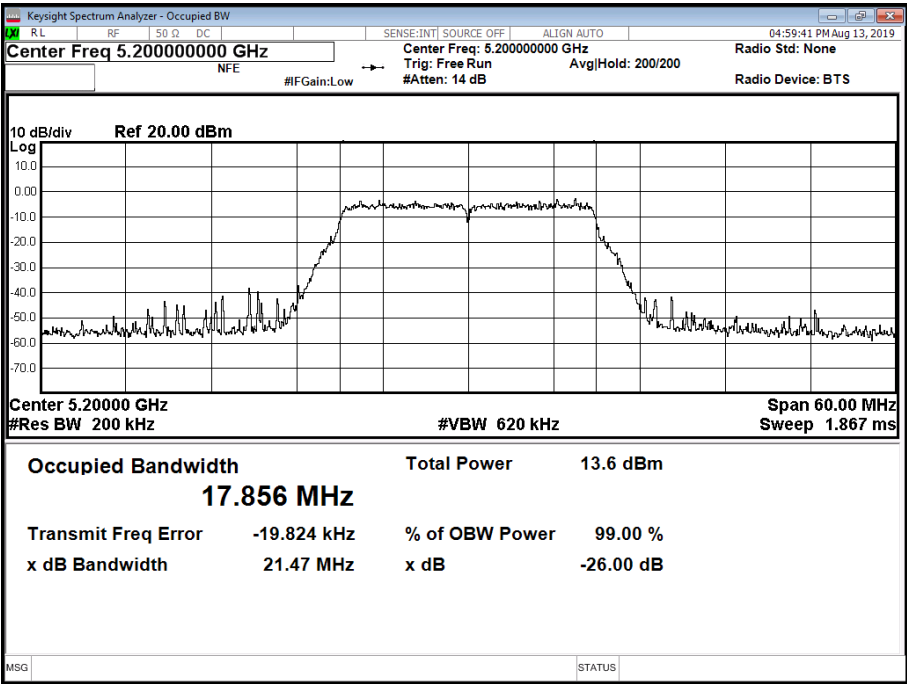


Figure 46 - 5200 MHz - 99% Occupied Bandwidth

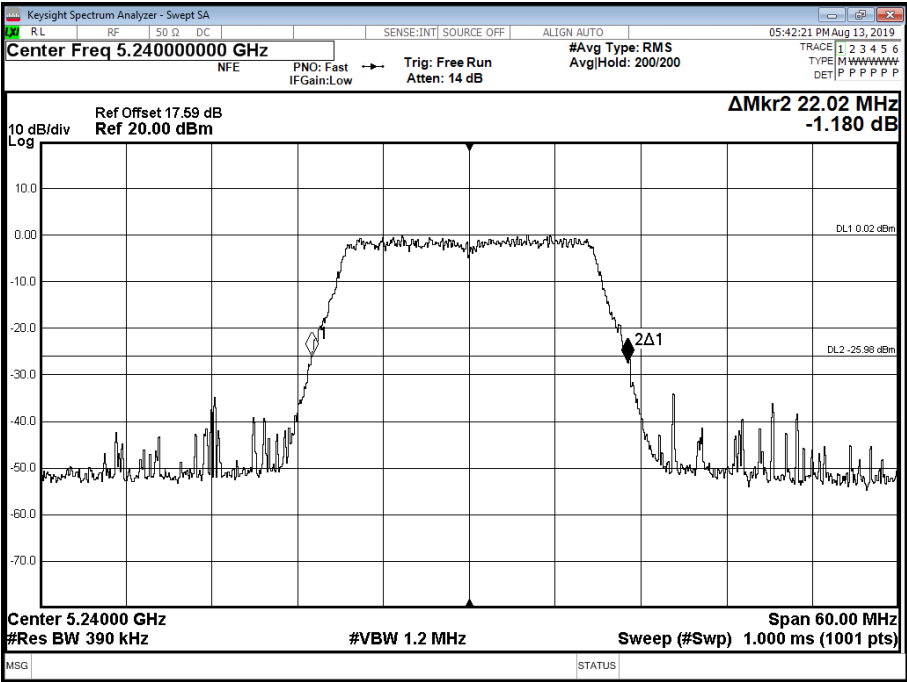


Figure 47 - 5240 MHz - 26 dB Emission Bandwidth

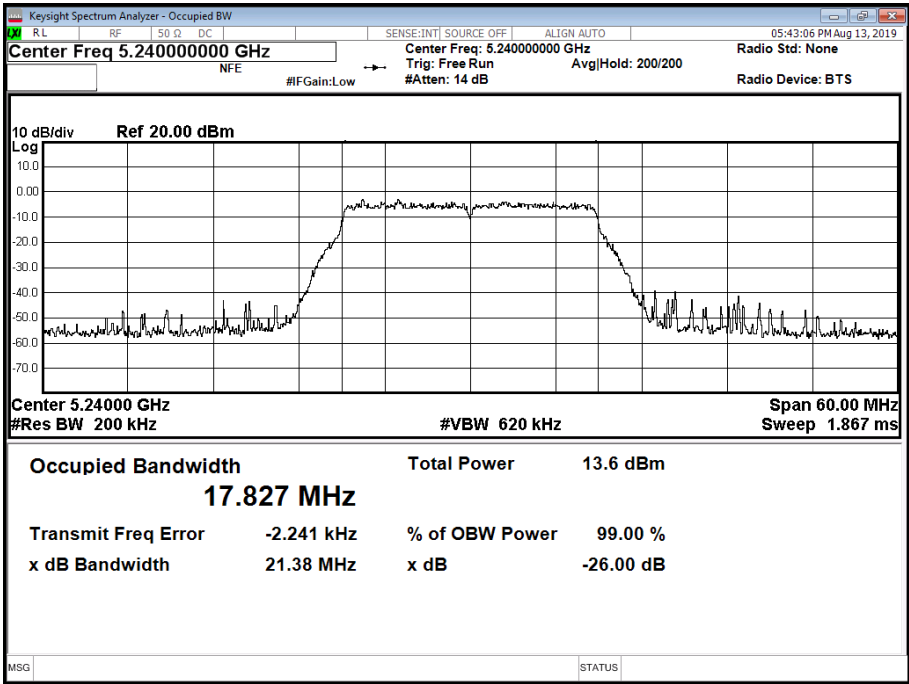


Figure 48 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.840	22.020	22.020
99% Bandwidth (MHz)	17.847	17.846	17.825

Table 302 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code US

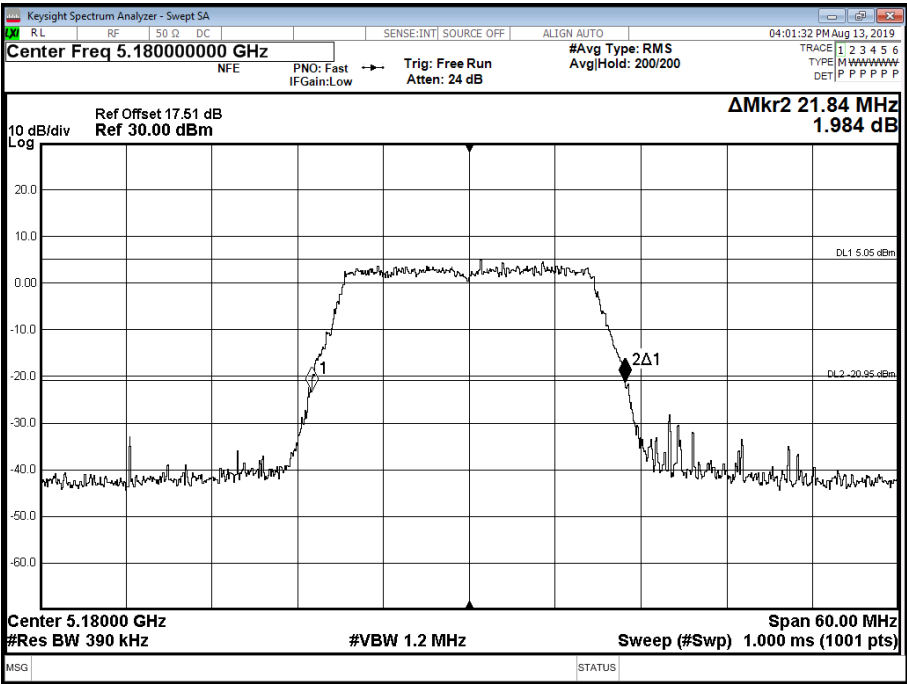


Figure 49 - 5180 MHz - 26 dB Emission Bandwidth

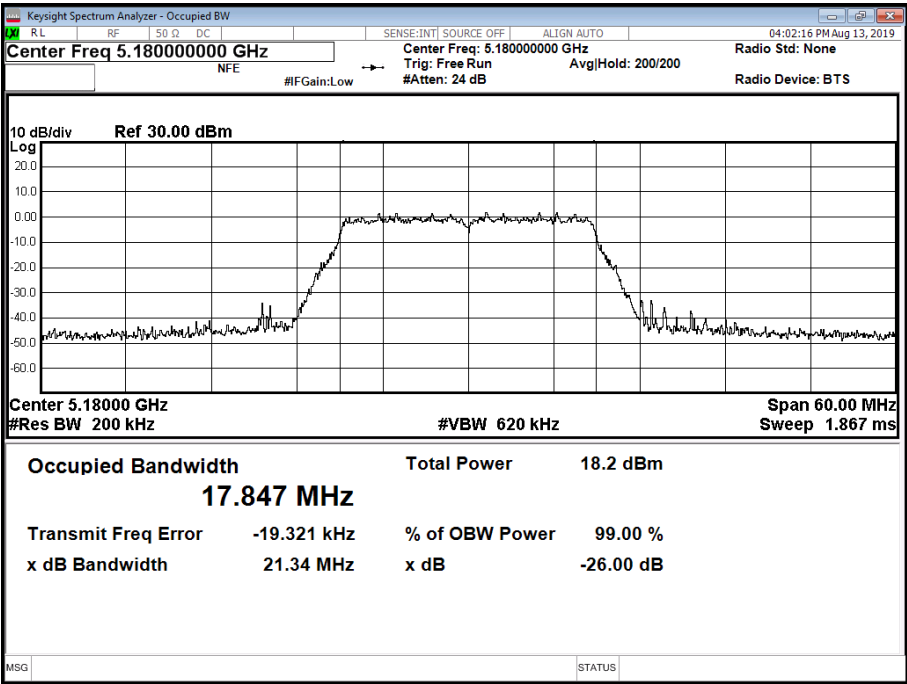


Figure 50 - 5180 MHz - 99% Occupied Bandwidth

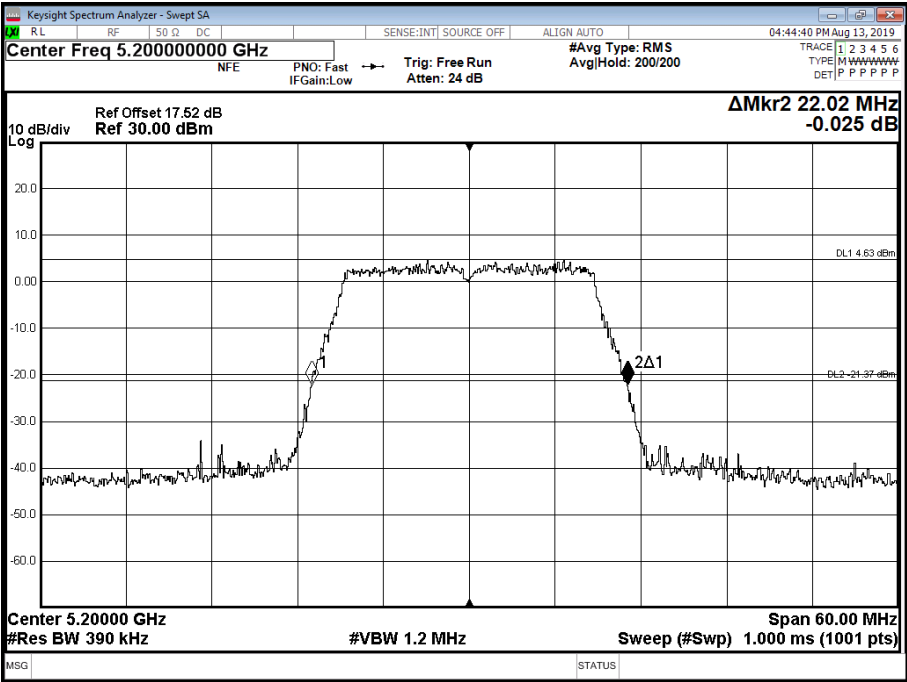


Figure 51 - 5200 MHz - 26 dB Emission Bandwidth

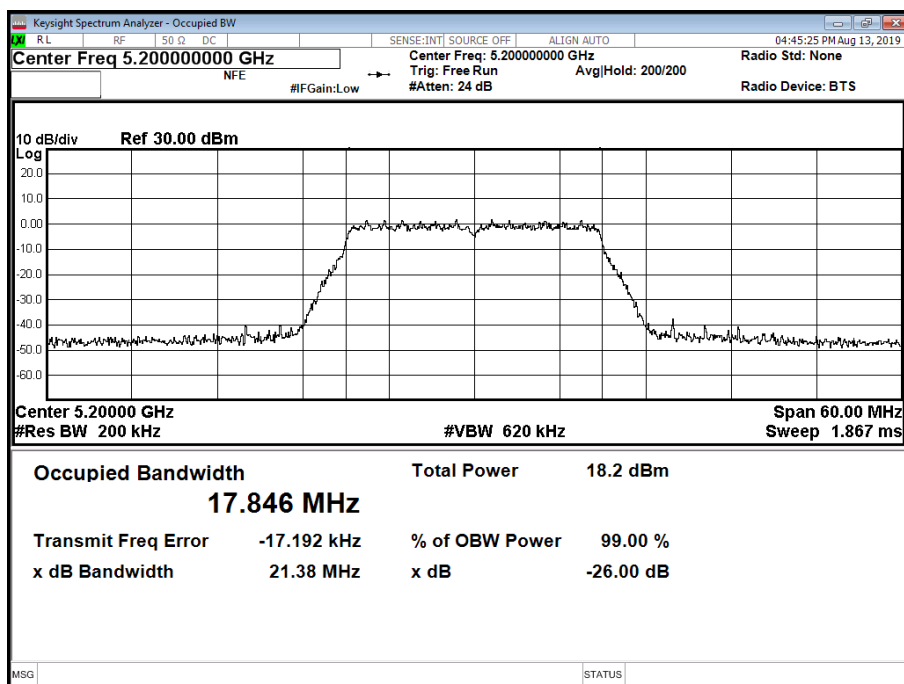


Figure 52 - 5200 MHz - 99% Occupied Bandwidth

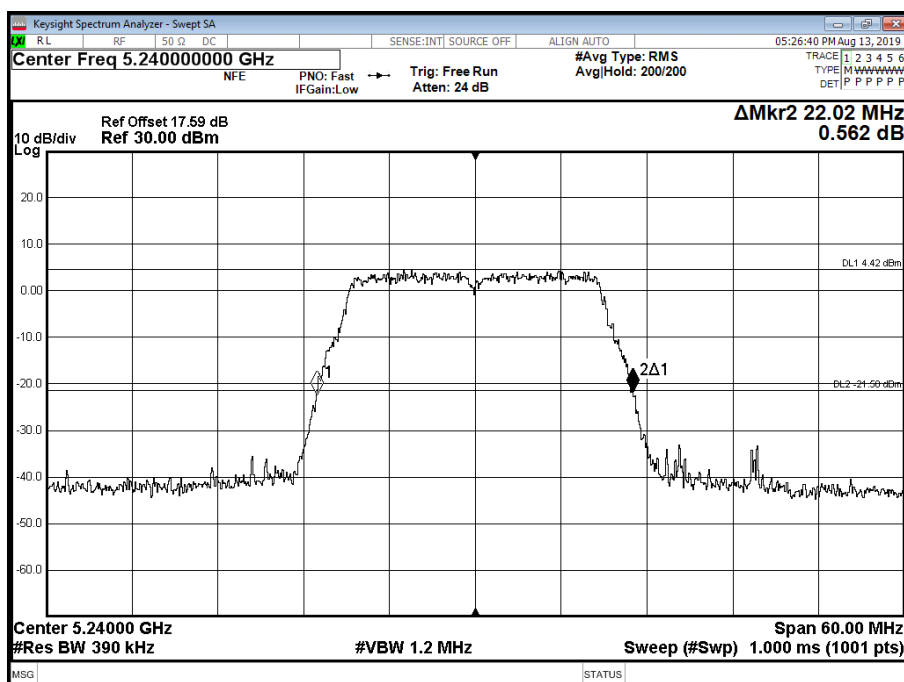


Figure 53 - 5240 MHz - 26 dB Emission Bandwidth

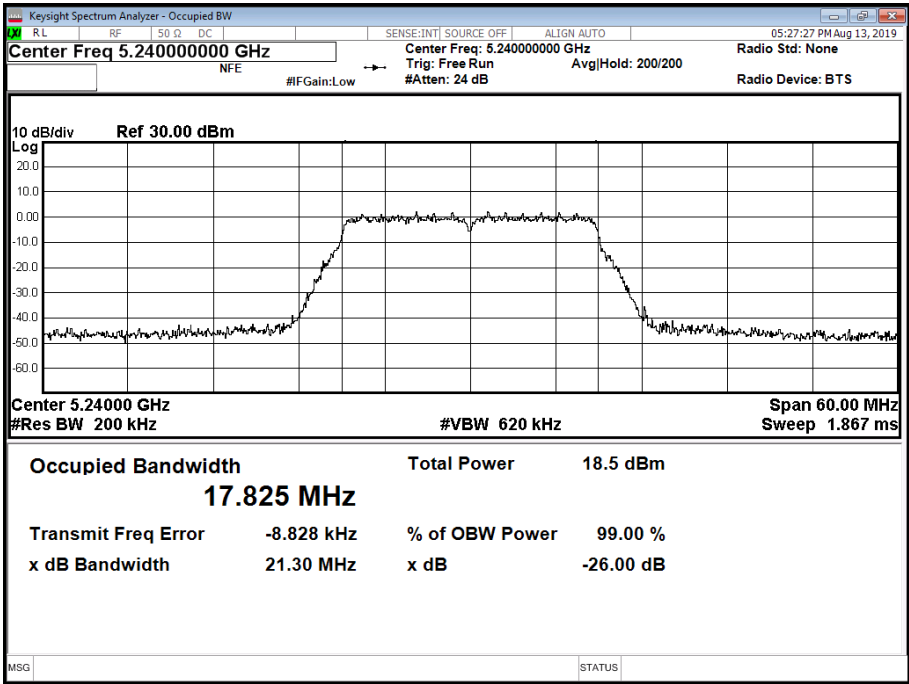


Figure 54 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.200	22.080	22.140
99% Bandwidth (MHz)	17.834	17.849	17.841

Table 303 - 802.11n / HT20 MCS8 / MIMO SDM / Cores 0+1 / Country Code CA

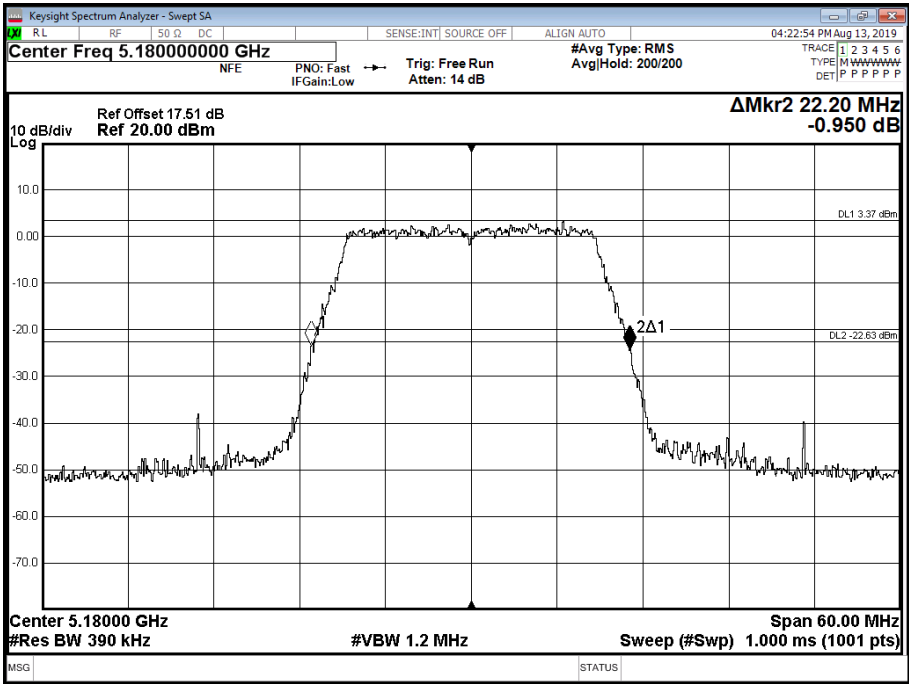


Figure 55 - 5180 MHz - 26 dB Emission Bandwidth

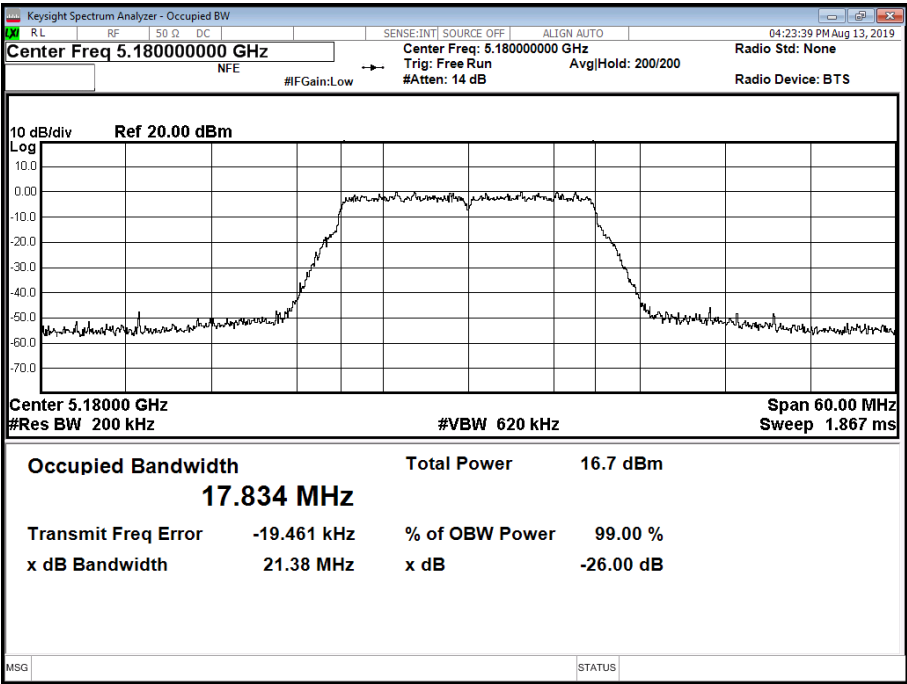


Figure 56 - 5180 MHz - 99% Occupied Bandwidth

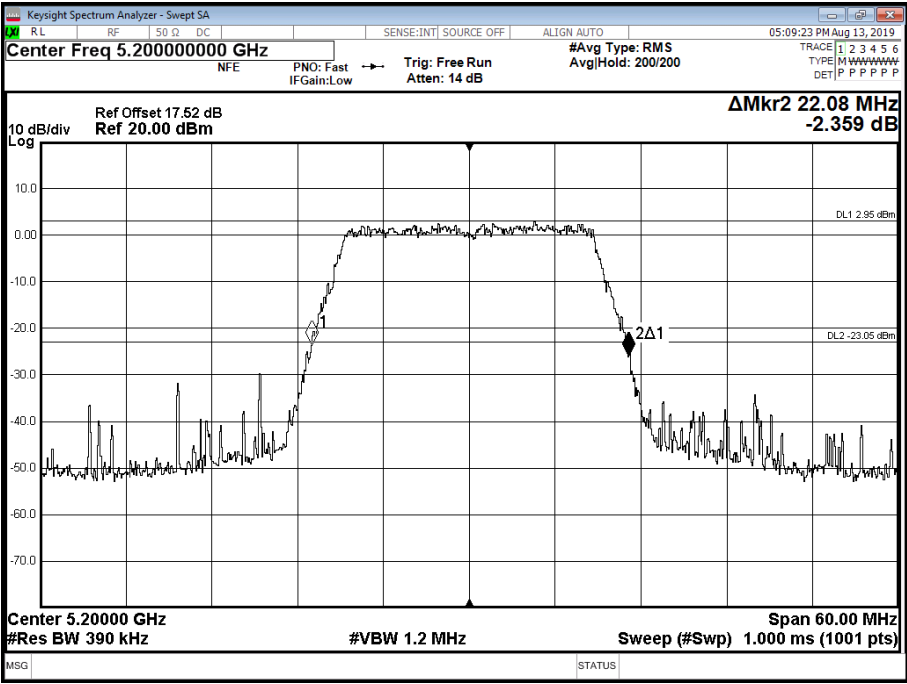


Figure 57 - 5200 MHz - 26 dB Emission Bandwidth

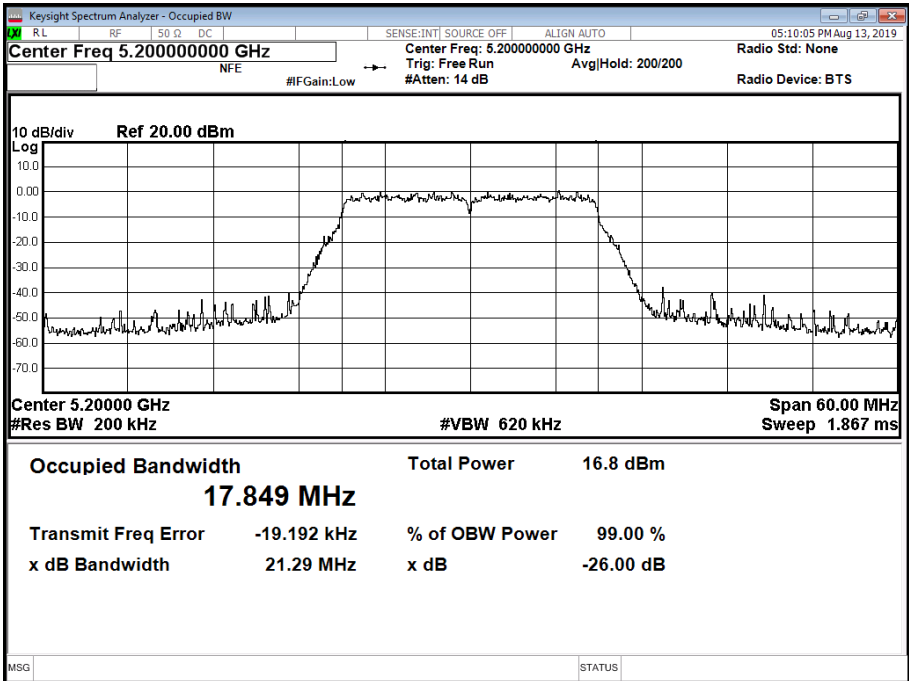


Figure 58 - 5200 MHz - 99% Occupied Bandwidth

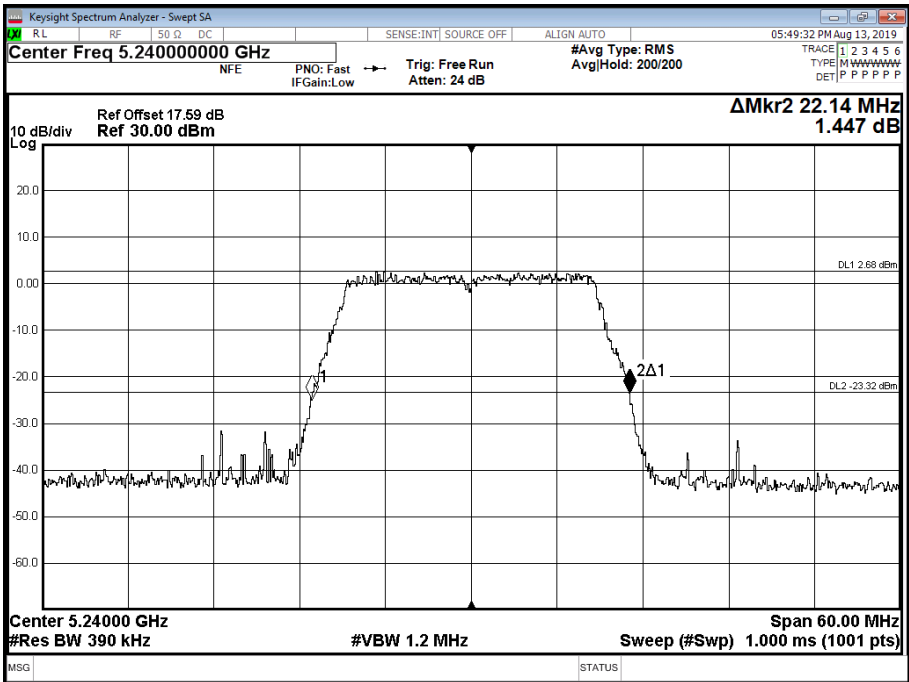


Figure 59 - 5240 MHz - 26 dB Emission Bandwidth

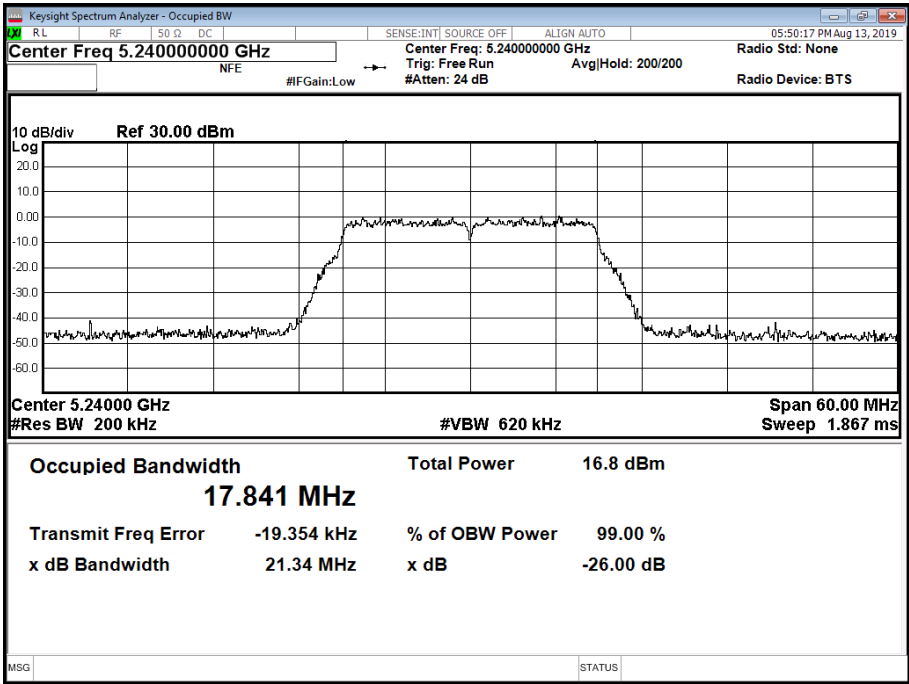


Figure 60 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.200	22.200	22.200
99% Bandwidth (MHz)	17.874	17.857	17.853

Table 304 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code US

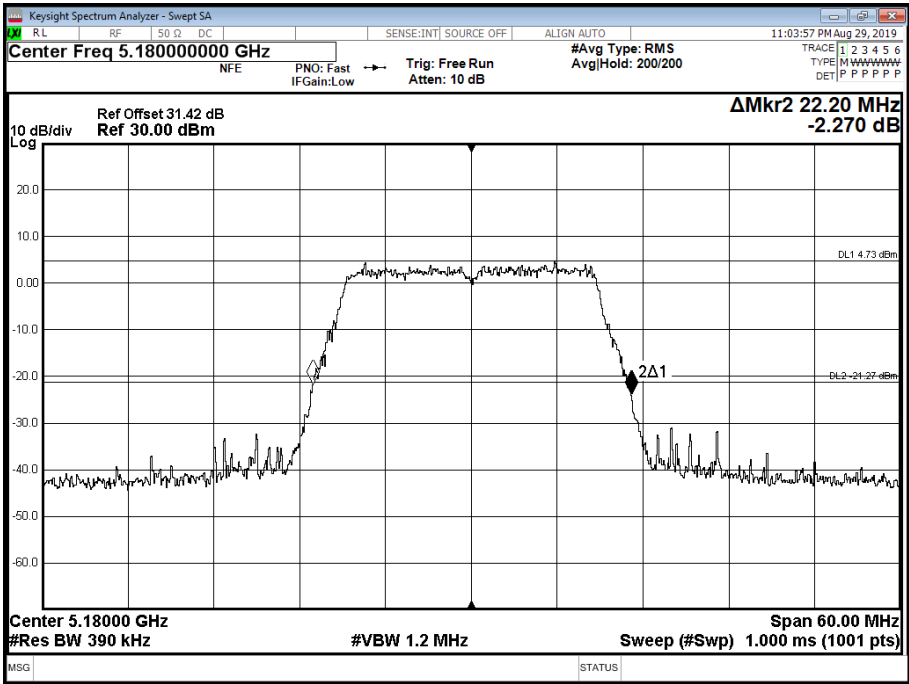


Figure 61 - 5180 MHz - 26 dB Emission Bandwidth

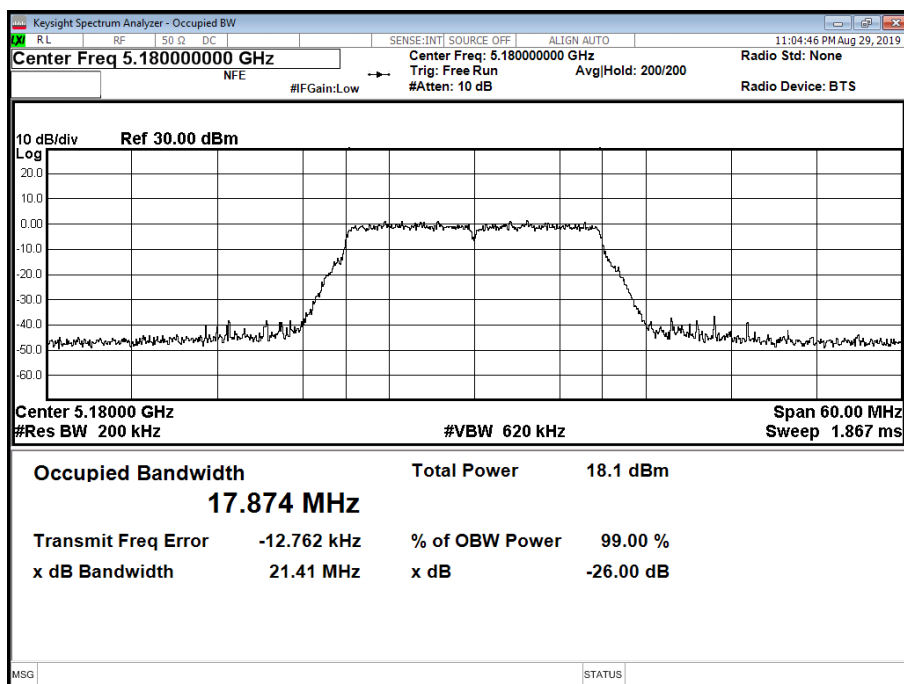


Figure 62 - 5180 MHz - 99% Occupied Bandwidth

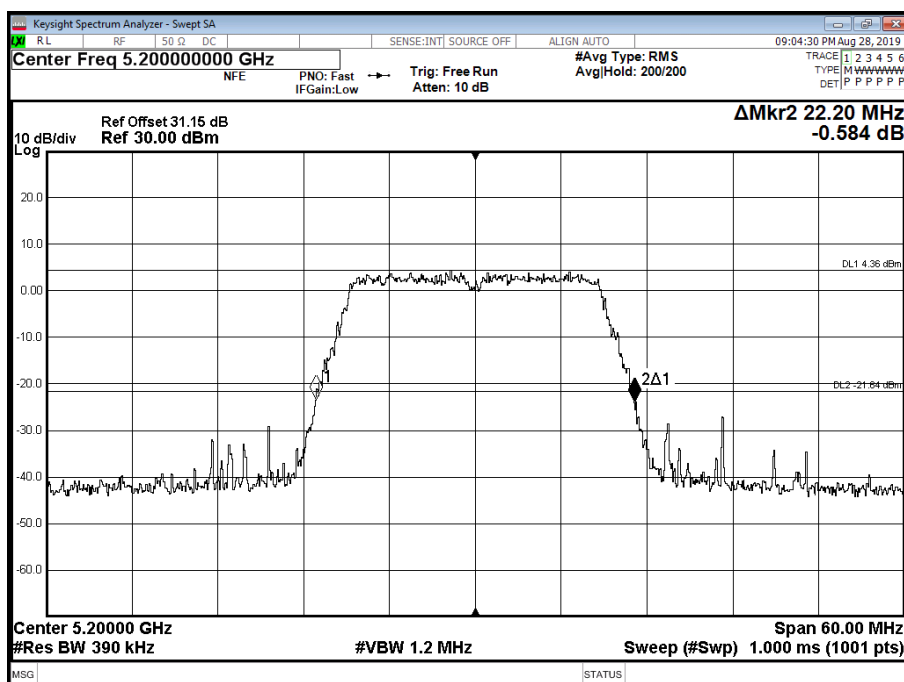


Figure 63 - 5200 MHz - 26 dB Emission Bandwidth

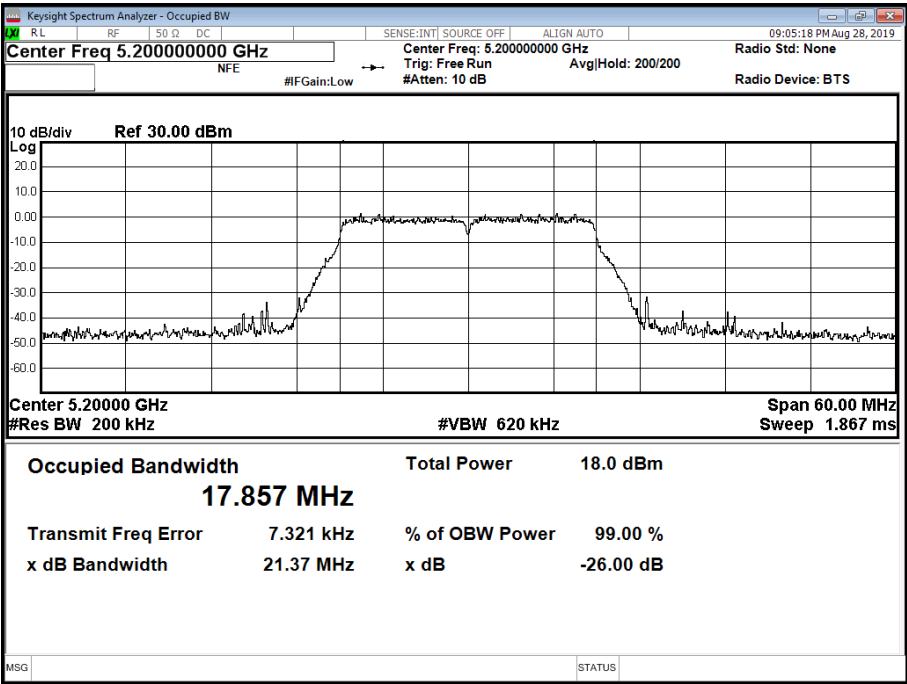


Figure 64 - 5200 MHz - 99% Occupied Bandwidth

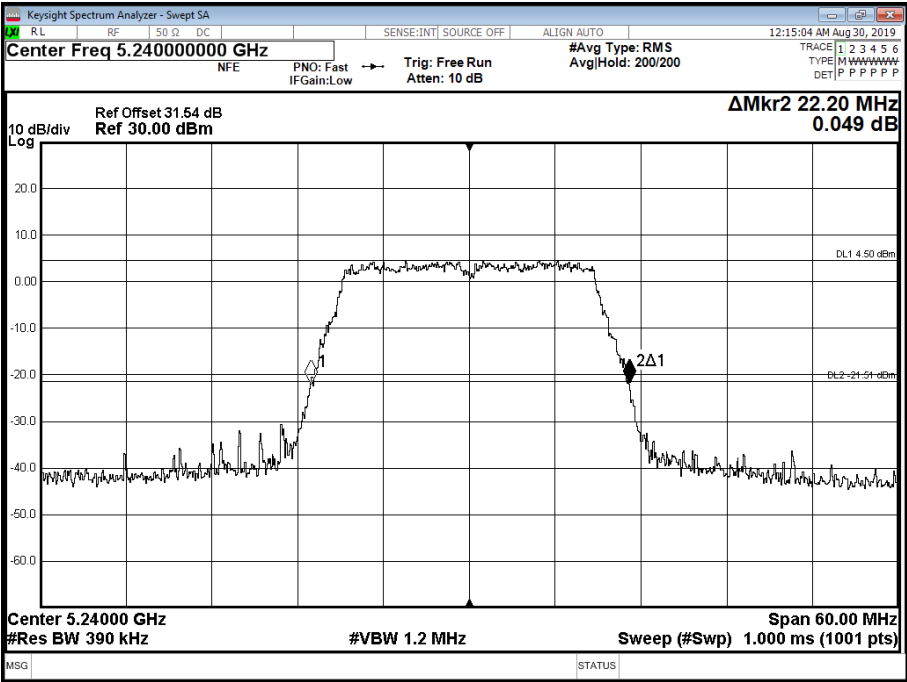


Figure 65 - 5240 MHz - 26 dB Emission Bandwidth

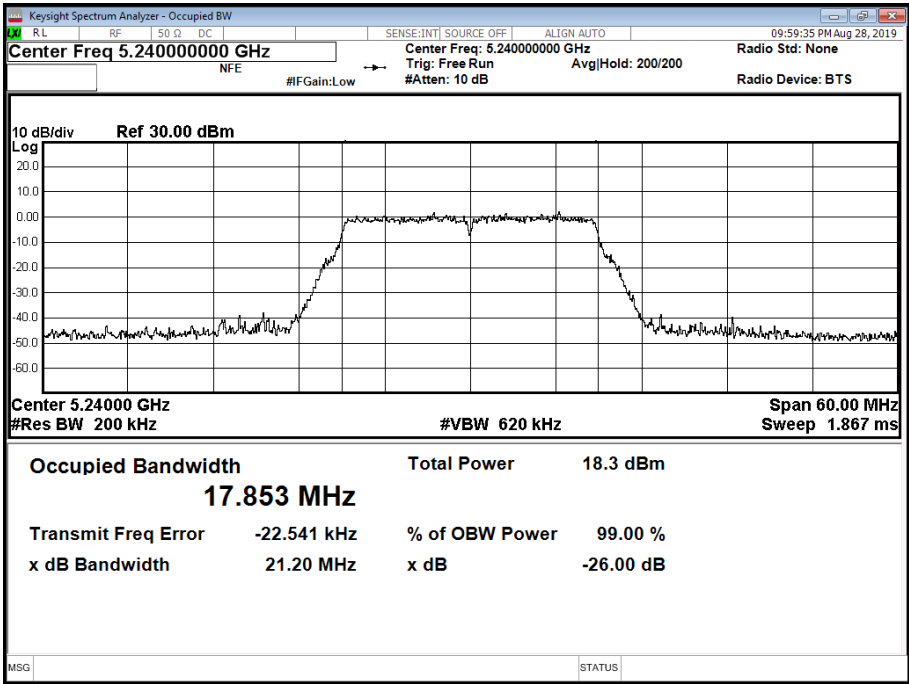


Figure 66 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.140	22.260	22.200
99% Bandwidth (MHz)	17.827	17.858	17.873

Table 305 - 802.11n / HT20 MCS0 / MIMO TxBF / Cores 0+1 / Country Code CA

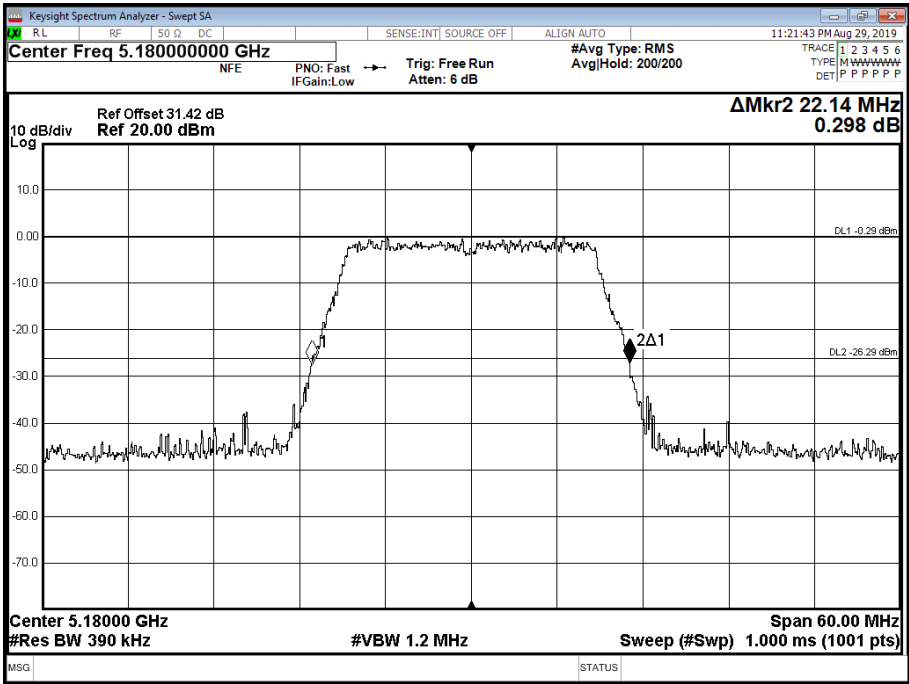


Figure 67 - 5180 MHz - 26 dB Emission Bandwidth

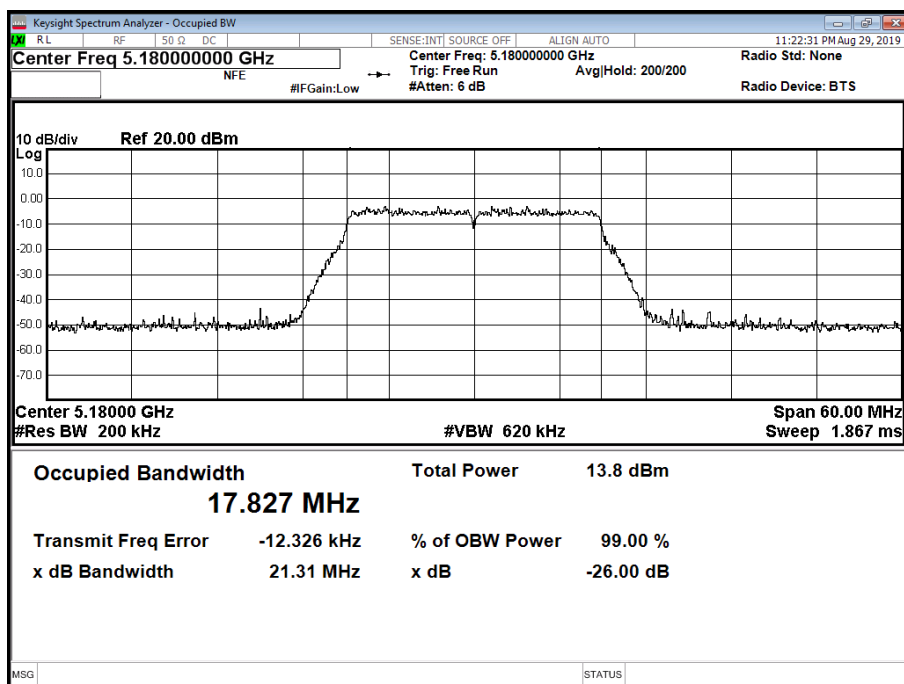


Figure 68 - 5180 MHz - 99% Occupied Bandwidth

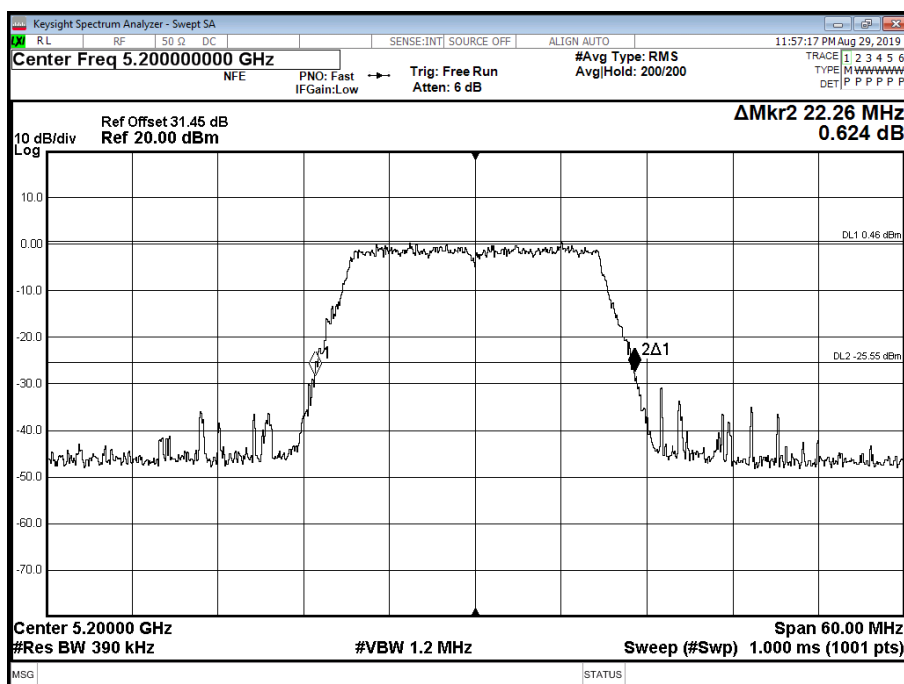


Figure 69 - 5200 MHz - 26 dB Emission Bandwidth

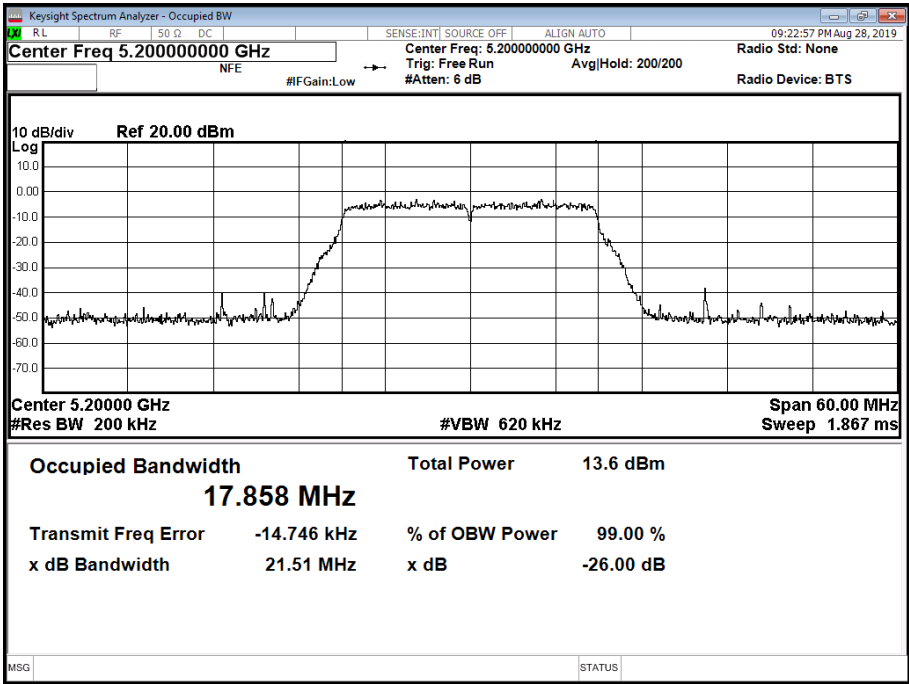


Figure 70 - 5200 MHz - 99% Occupied Bandwidth

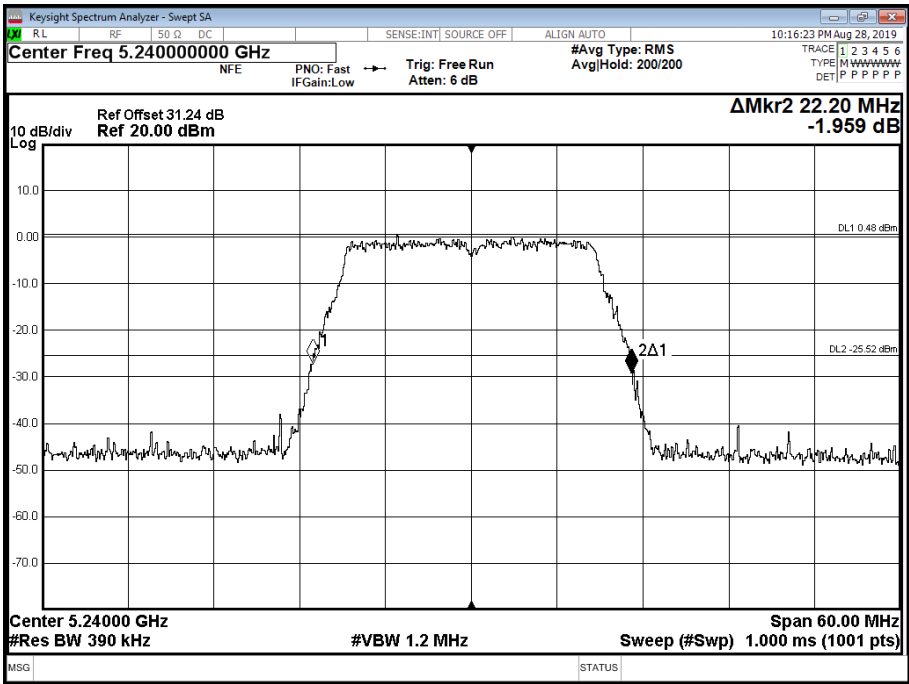


Figure 71 - 5240 MHz - 26 dB Emission Bandwidth

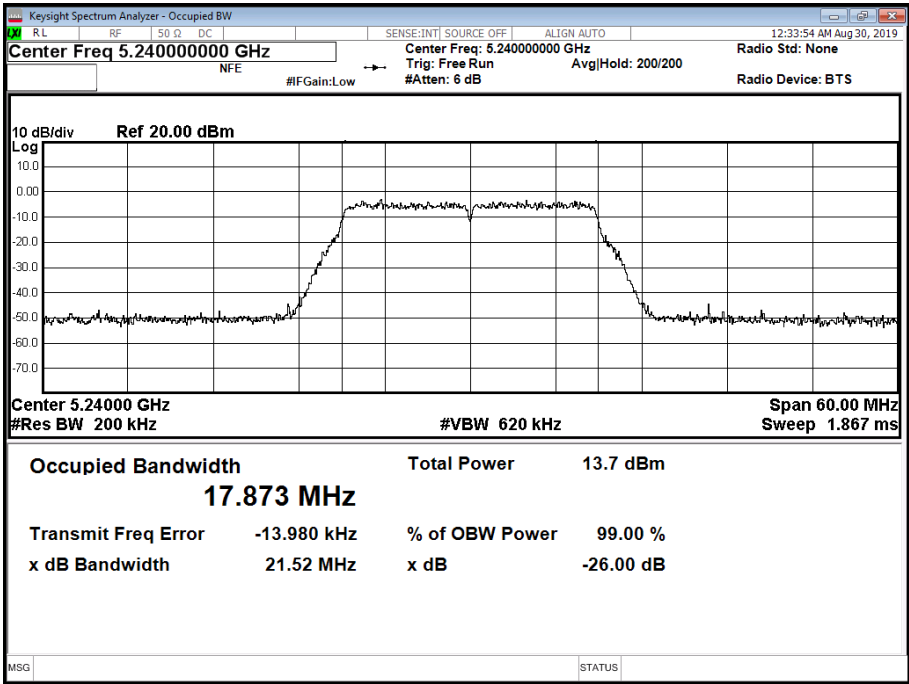


Figure 72 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.260	22.080	22.080
99% Bandwidth (MHz)	17.850	17.829	17.834

Table 306 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code US

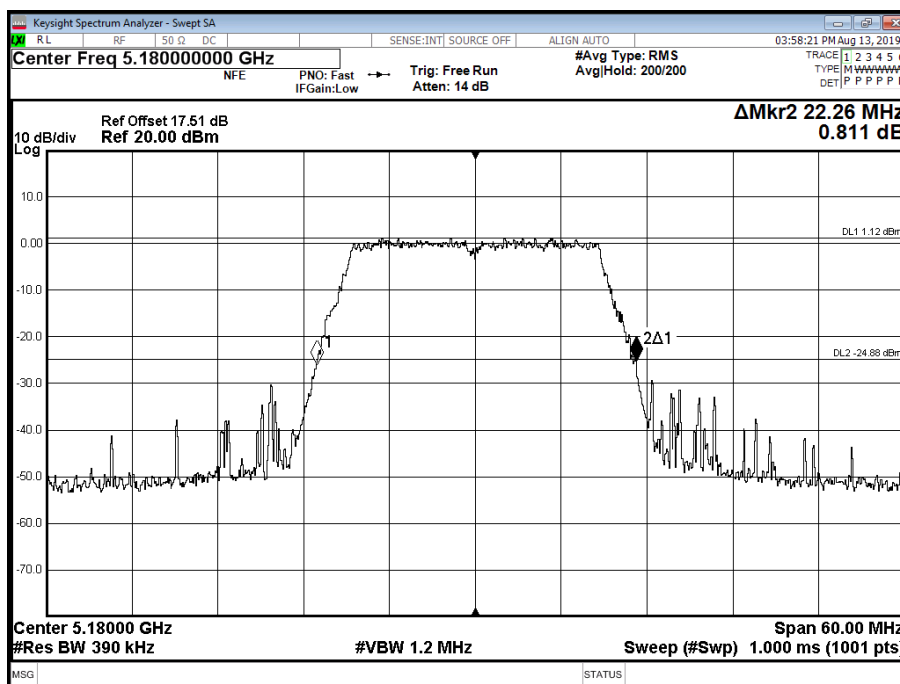


Figure 73 - 5180 MHz - 26 dB Emission Bandwidth

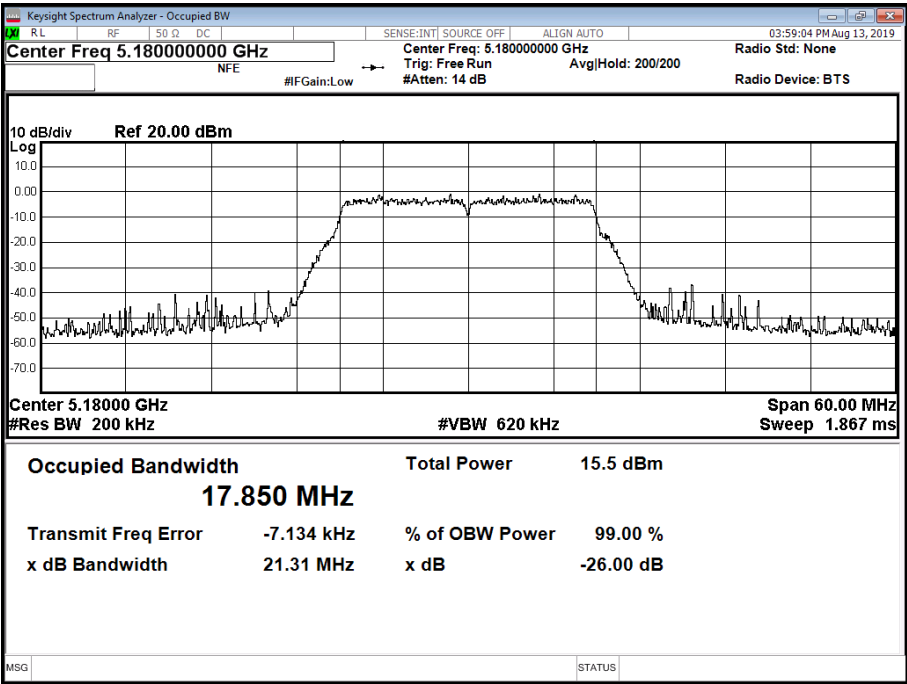


Figure 74 - 5180 MHz - 99% Occupied Bandwidth

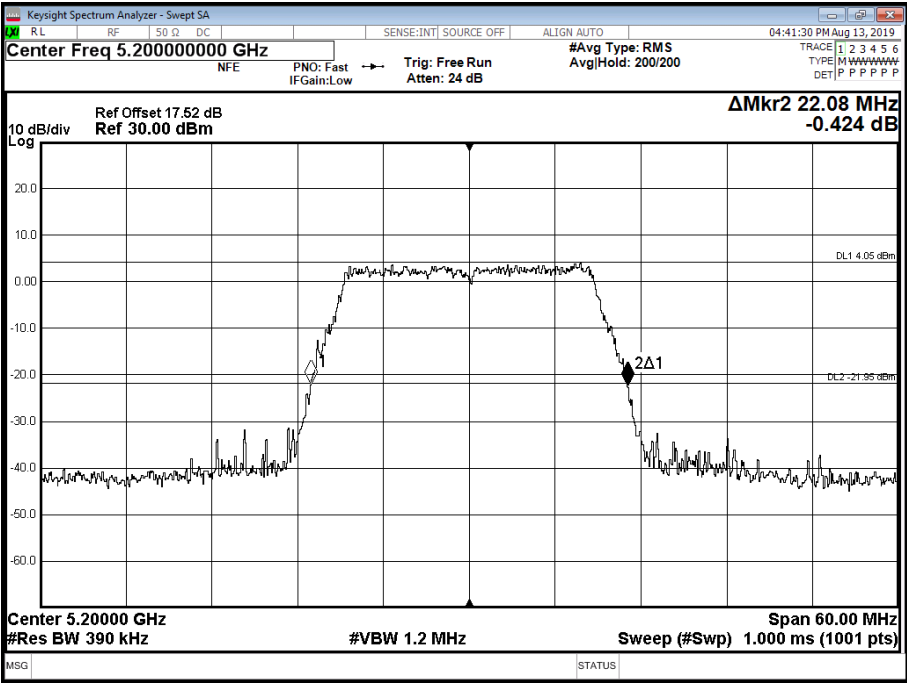


Figure 75 - 5200 MHz - 26 dB Emission Bandwidth

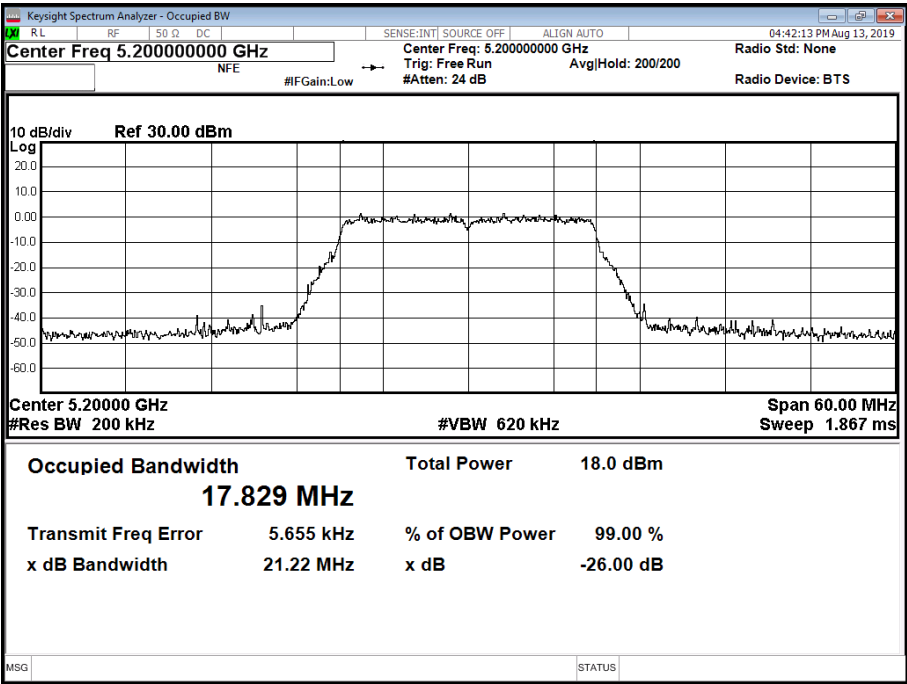


Figure 76 - 5200 MHz - 99% Occupied Bandwidth

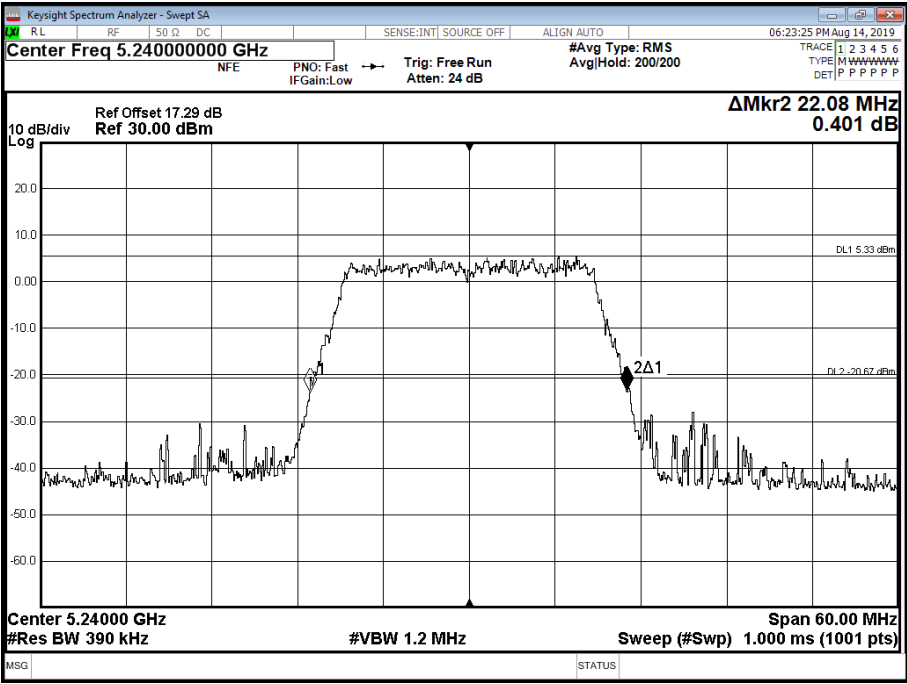


Figure 77 - 5240 MHz - 26 dB Emission Bandwidth

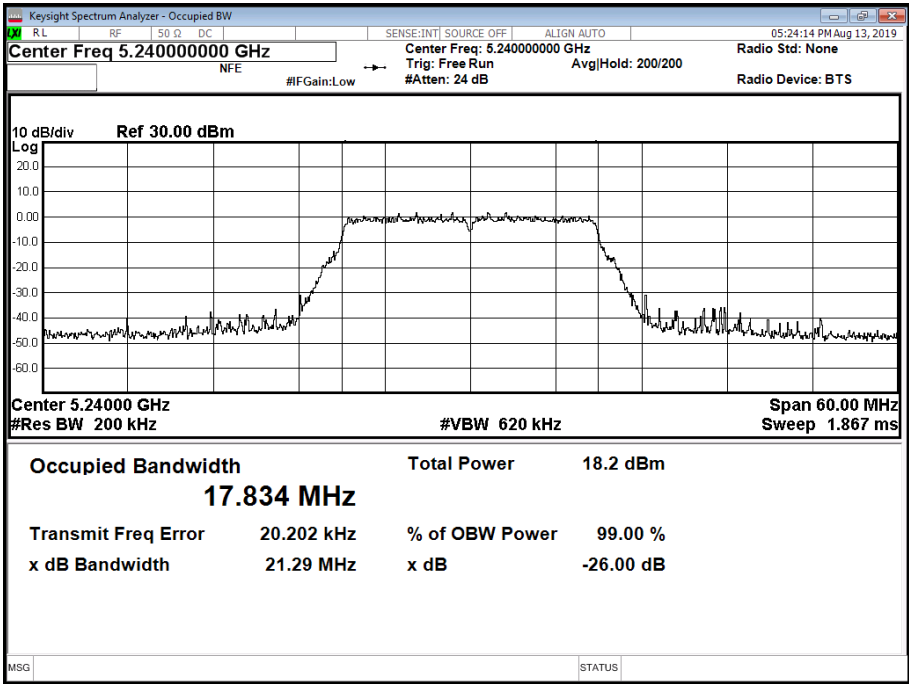


Figure 78 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.020	21.960	22.260
99% Bandwidth (MHz)	17.875	17.862	17.869

Table 307 - 802.11n / HT20 MCS0 / MIMO CDD / Cores 0+1+2 / Country Code CA

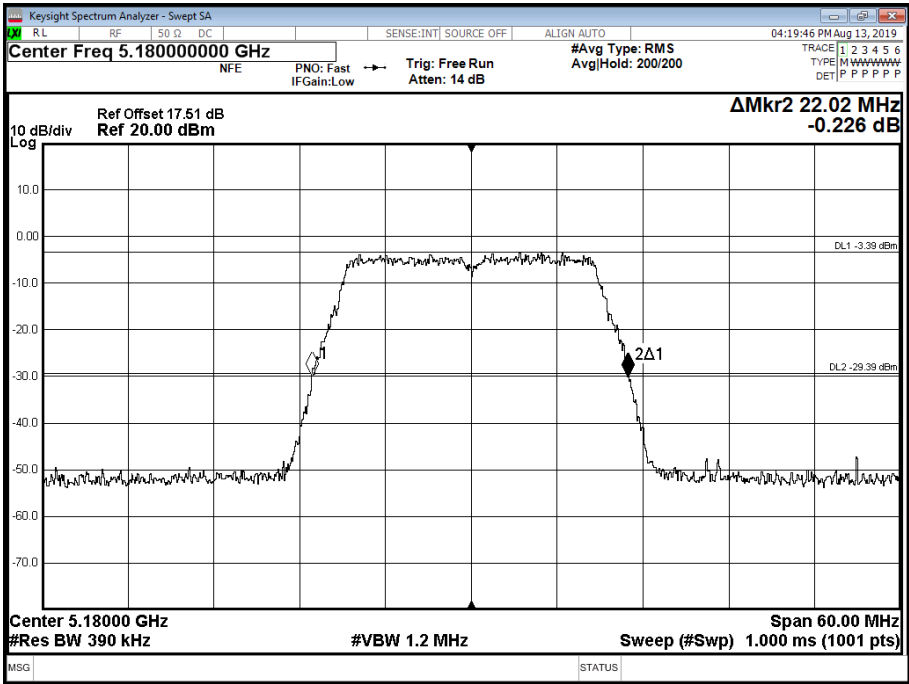


Figure 79 - 5180 MHz - 26 dB Emission Bandwidth

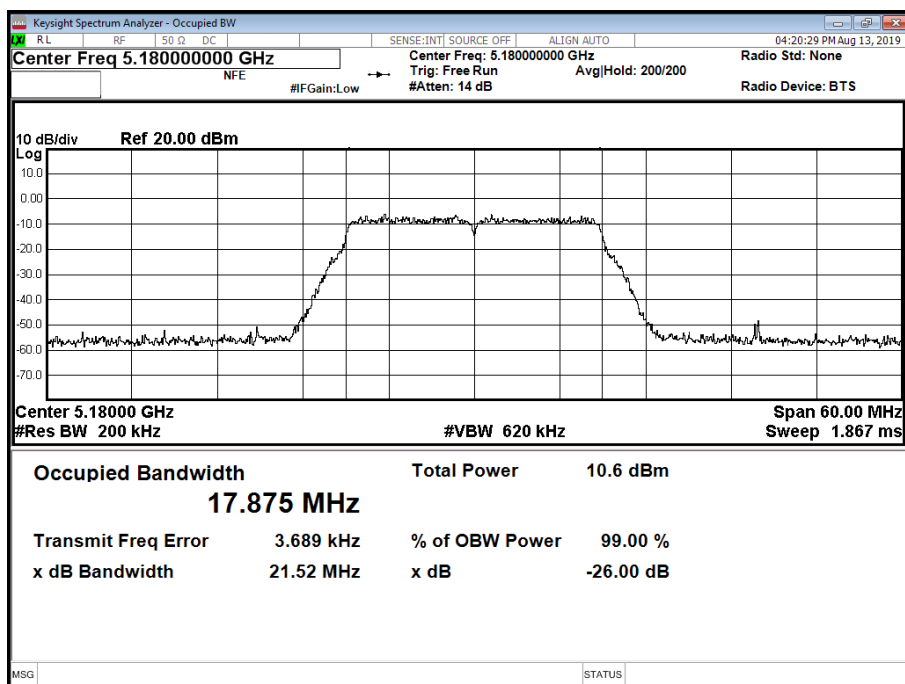


Figure 80 - 5180 MHz - 99% Occupied Bandwidth

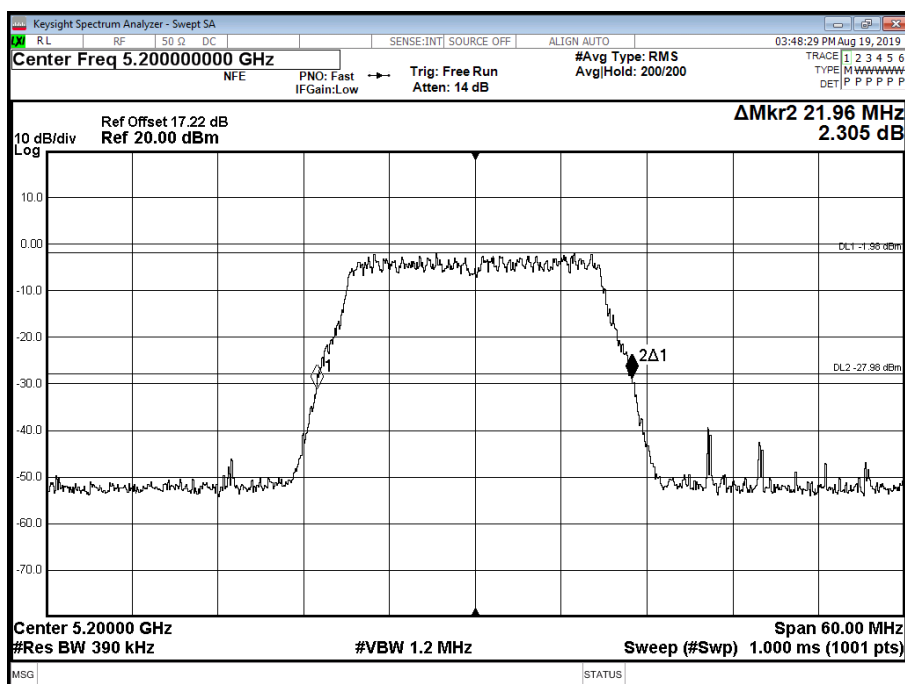


Figure 81 - 5200 MHz - 26 dB Emission Bandwidth

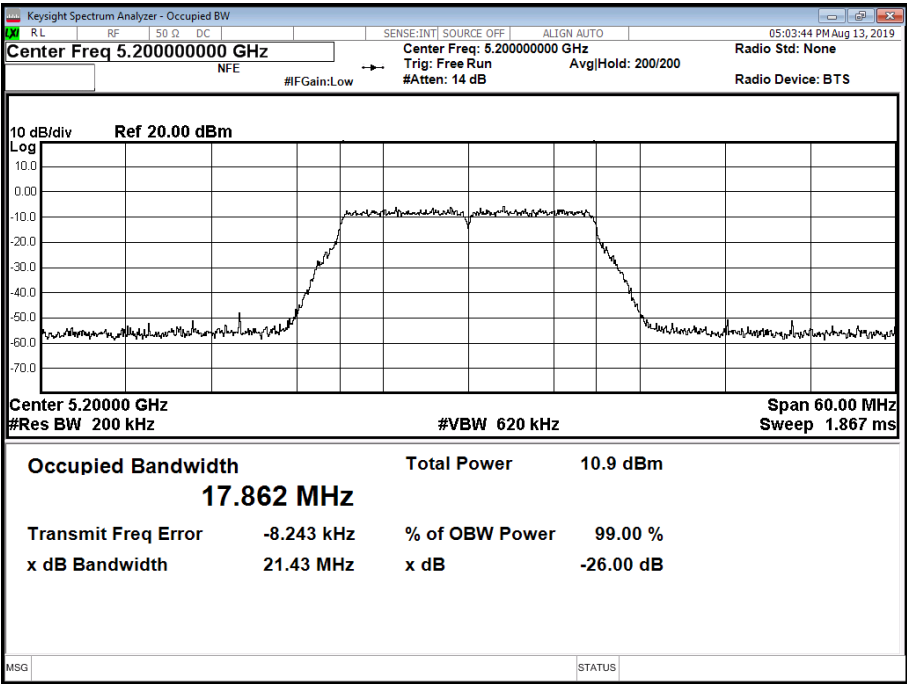


Figure 82 - 5200 MHz - 99% Occupied Bandwidth

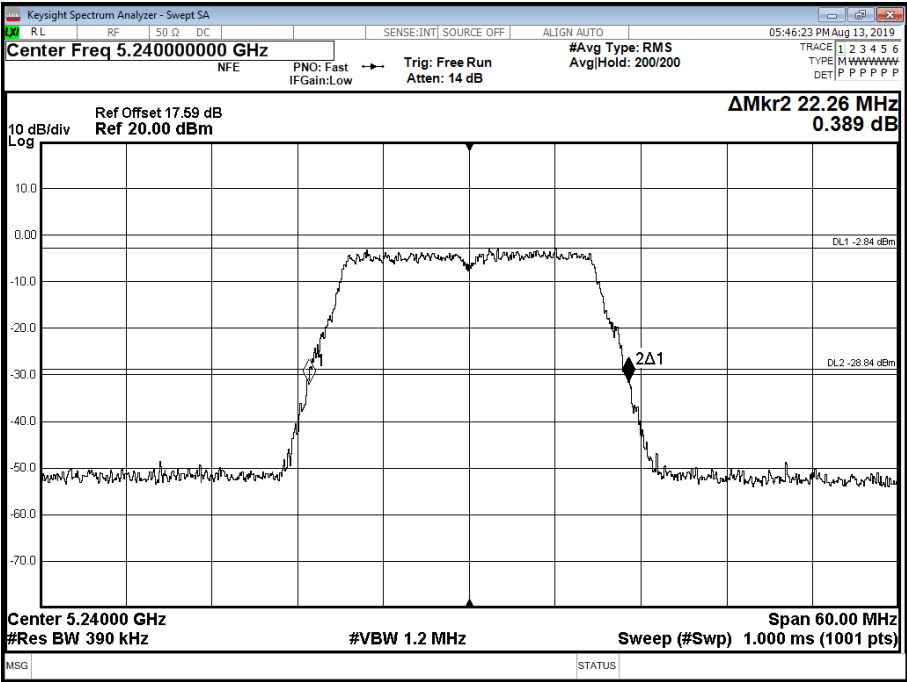


Figure 83 - 5240 MHz - 26 dB Emission Bandwidth

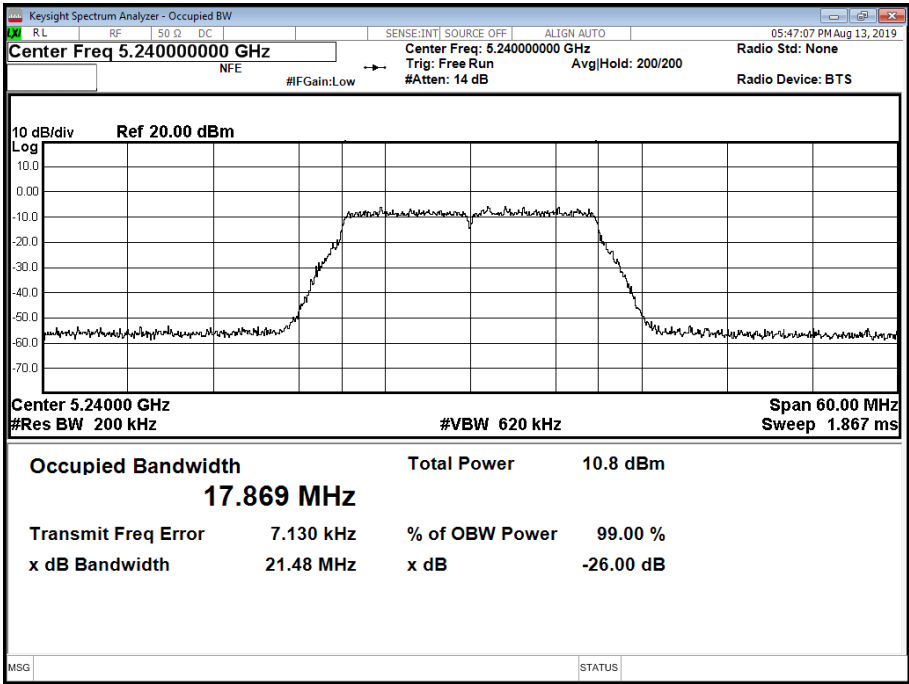


Figure 84 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.140	21.960	21.900
99% Bandwidth (MHz)	17.857	17.818	17.822

Table 308 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code US

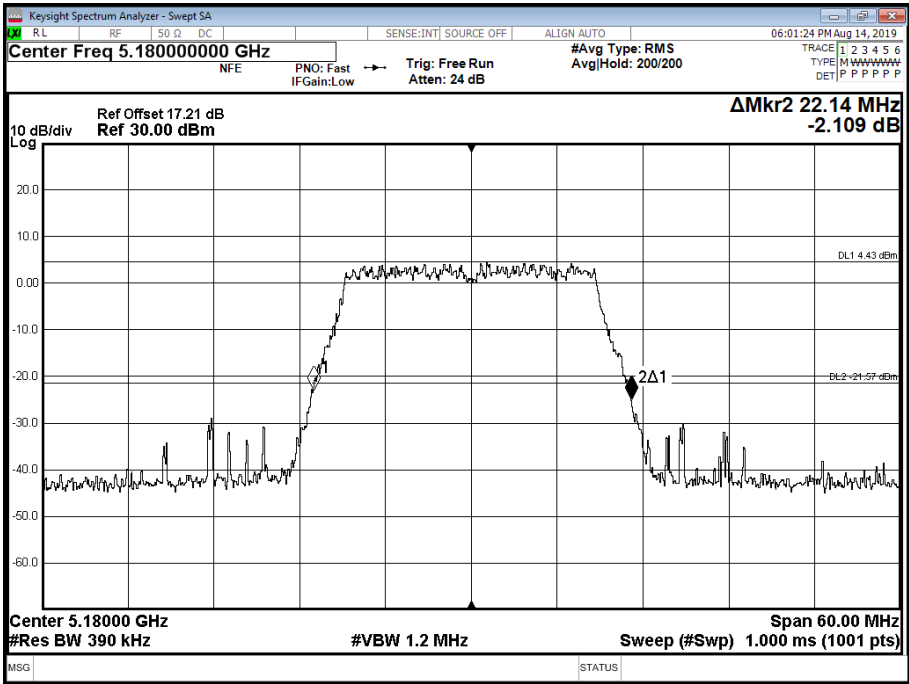


Figure 85 - 5180 MHz - 26 dB Emission Bandwidth

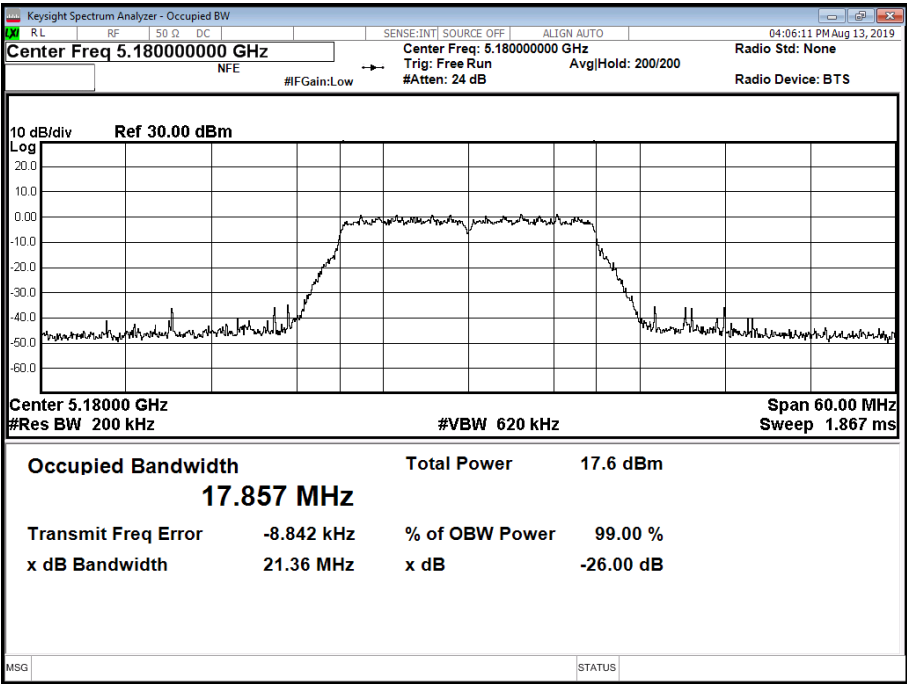


Figure 86 - 5180 MHz - 99% Occupied Bandwidth

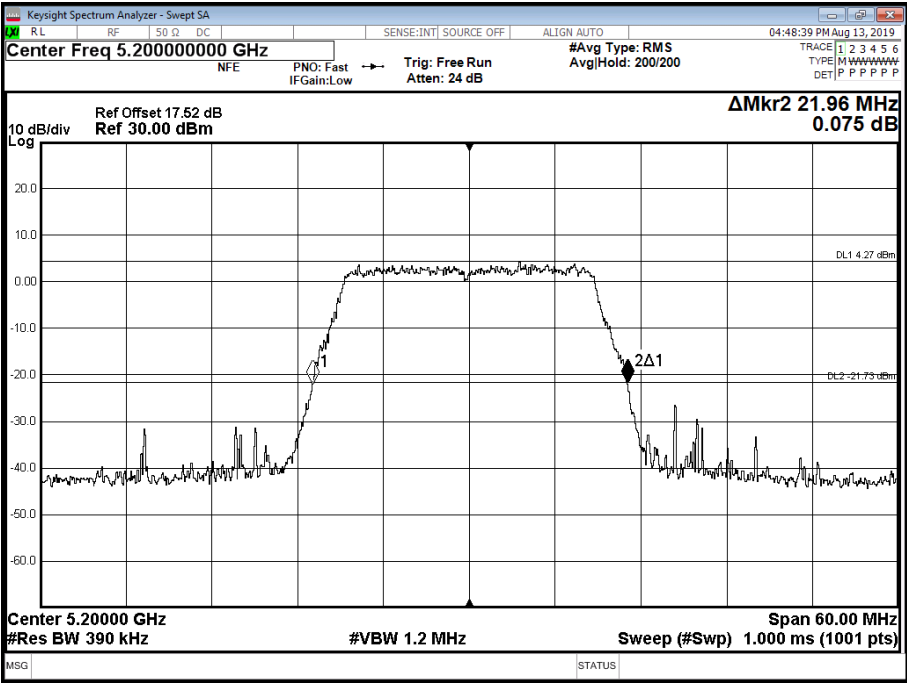


Figure 87 - 5200 MHz - 26 dB Emission Bandwidth

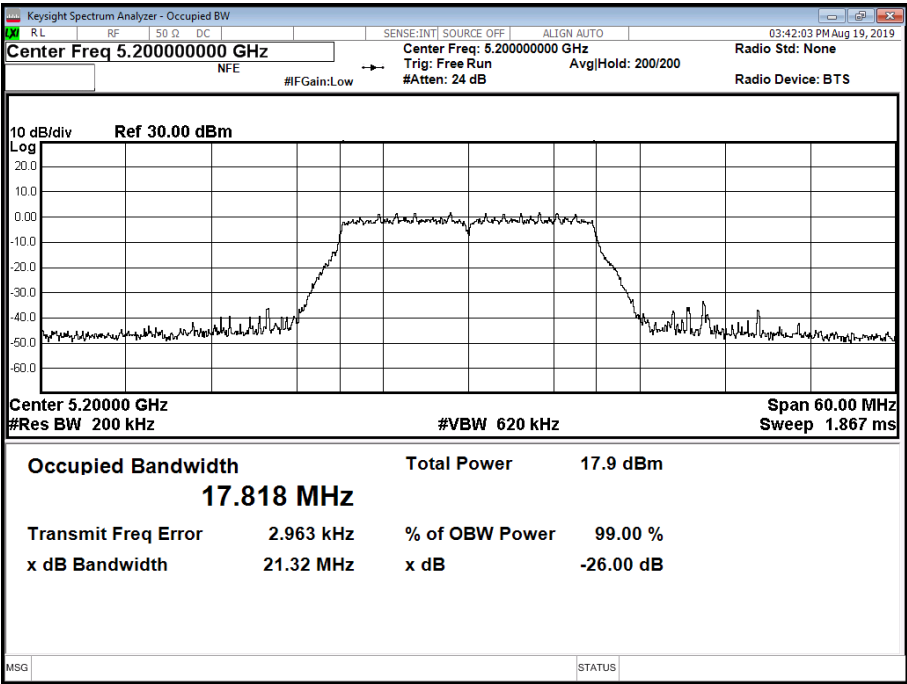


Figure 88 - 5200 MHz - 99% Occupied Bandwidth

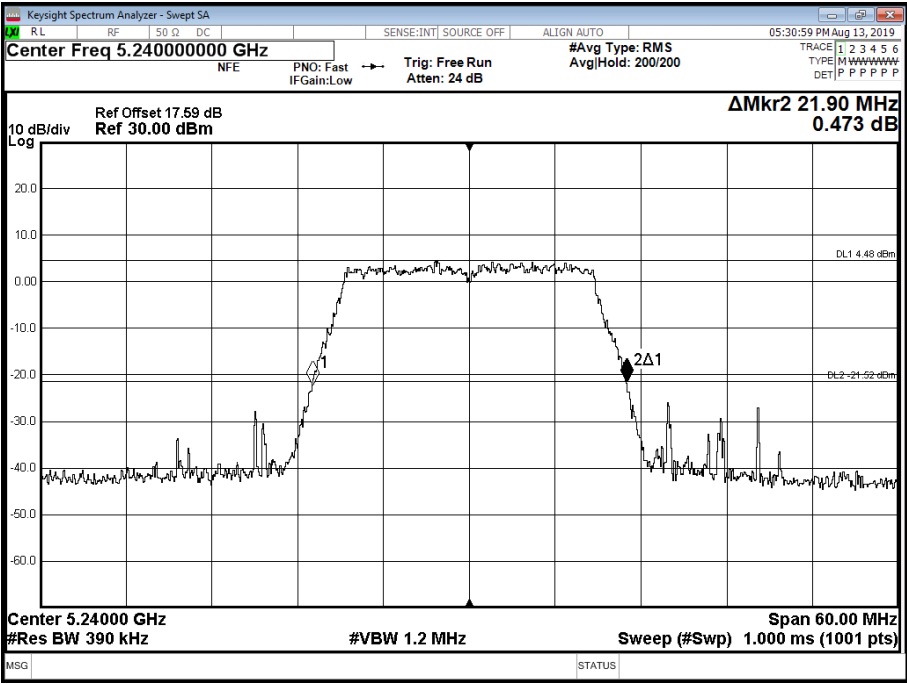


Figure 89 - 5240 MHz - 26 dB Emission Bandwidth

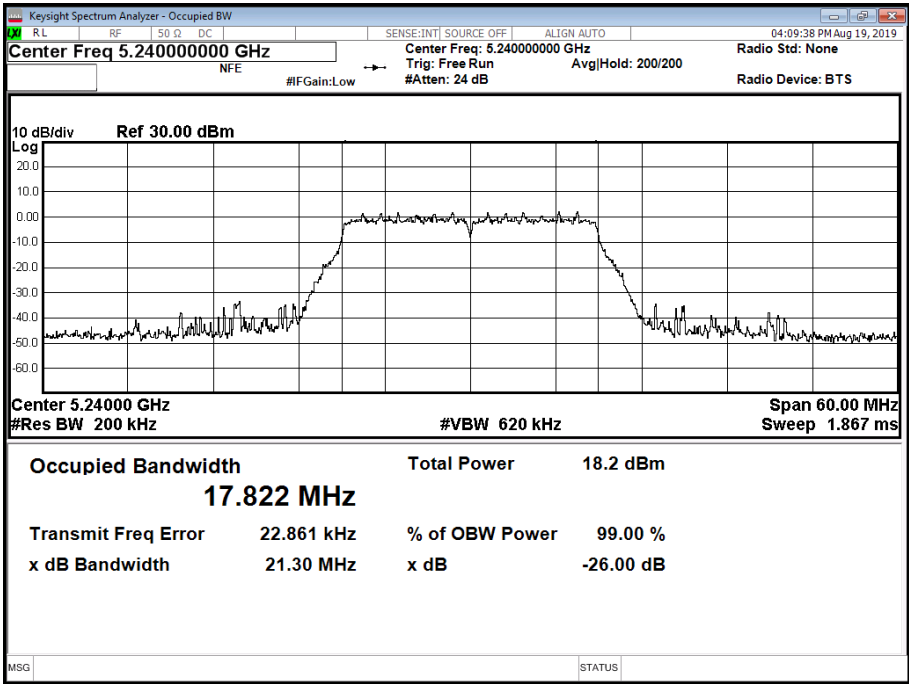


Figure 90 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	21.900	21.900	21.900
99% Bandwidth (MHz)	17.822	17.805	17.817

Table 309 - 802.11n / HT20 MCS16 / MIMO SDM / Cores 0+1+2 / Country Code CA

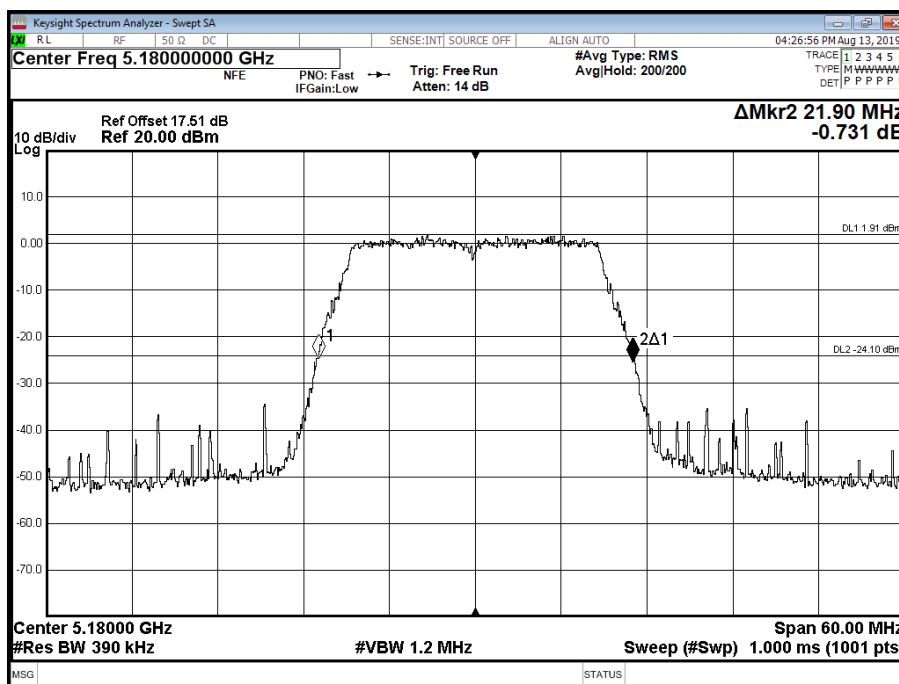


Figure 91 - 5180 MHz - 26 dB Emission Bandwidth

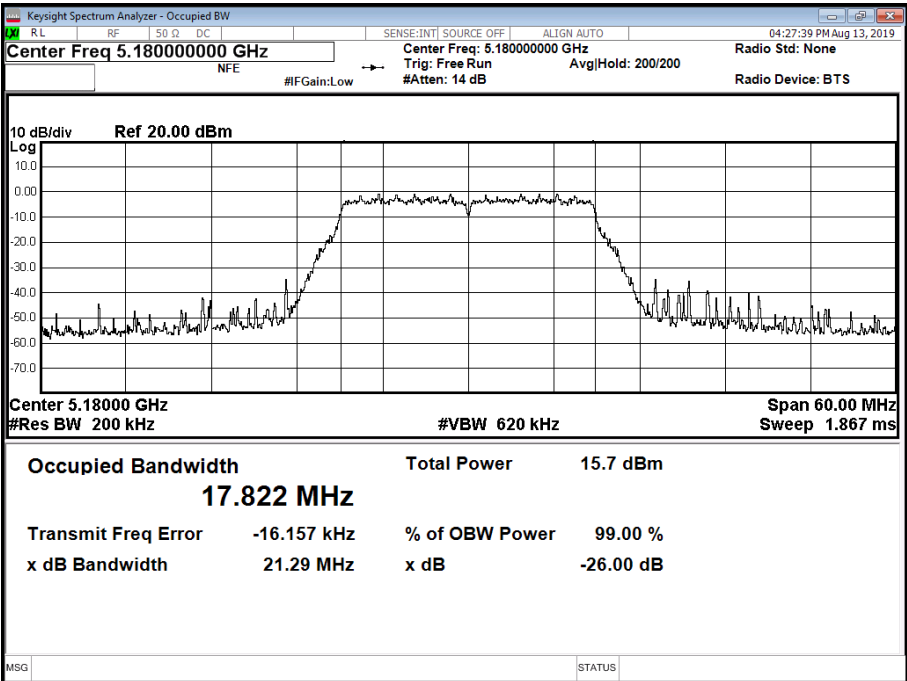


Figure 92 - 5180 MHz - 99% Occupied Bandwidth

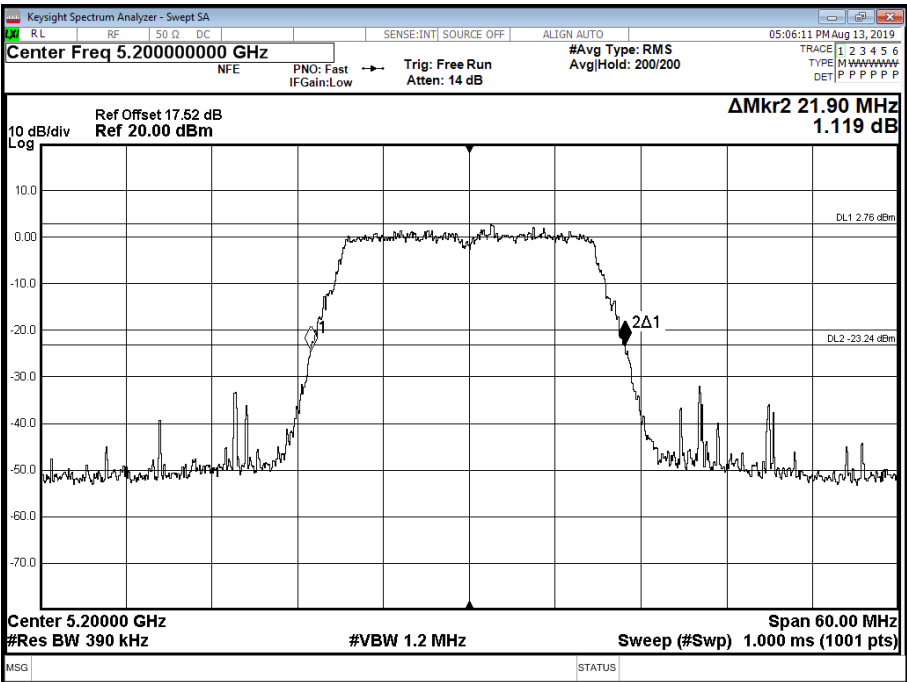


Figure 93 - 5200 MHz - 26 dB Emission Bandwidth

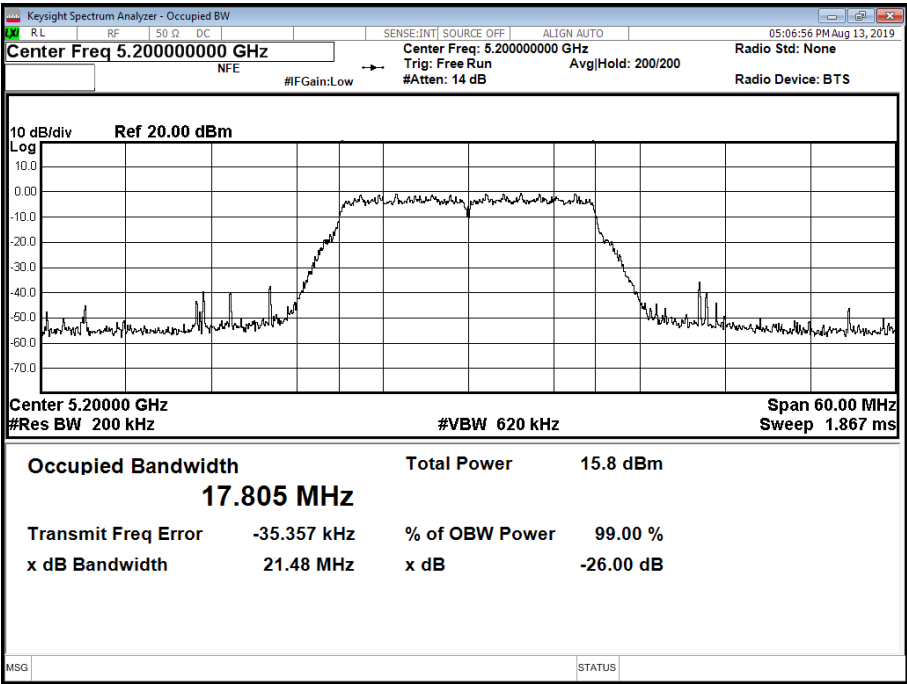


Figure 94 - 5200 MHz - 99% Occupied Bandwidth

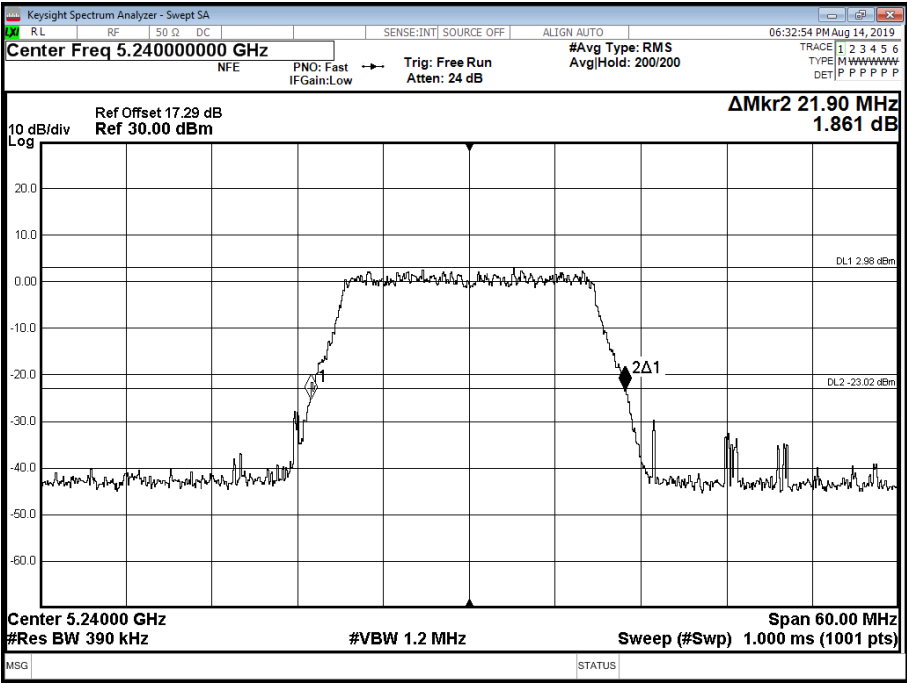


Figure 95 - 5240 MHz - 26 dB Emission Bandwidth

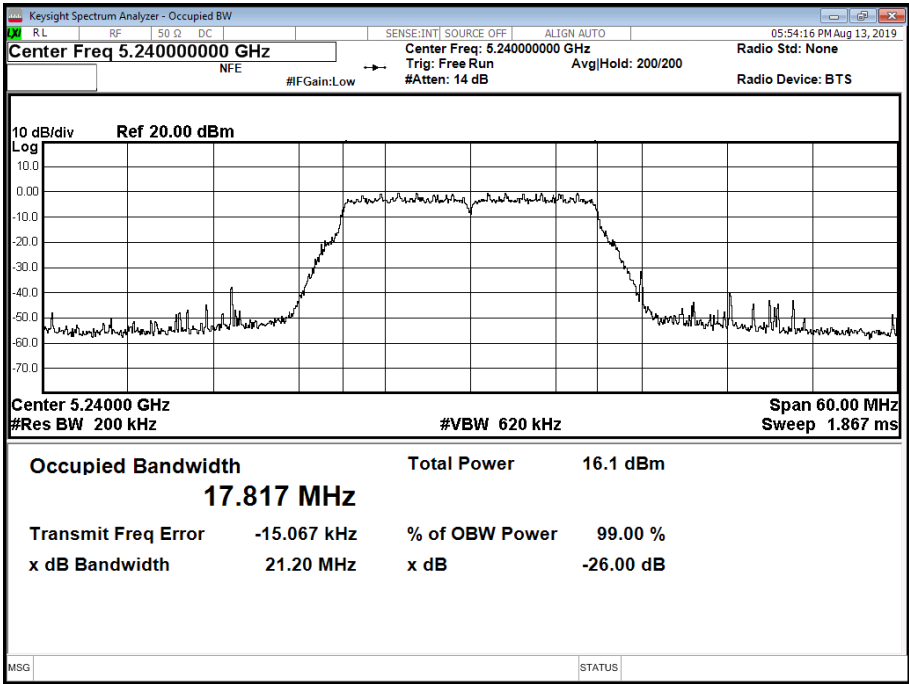


Figure 96 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.140	22.440	22.140
99% Bandwidth (MHz)	17.849	17.877	17.830

Table 310 - 802.11n / HT20 MCS0 / Aux Core / Country Code US

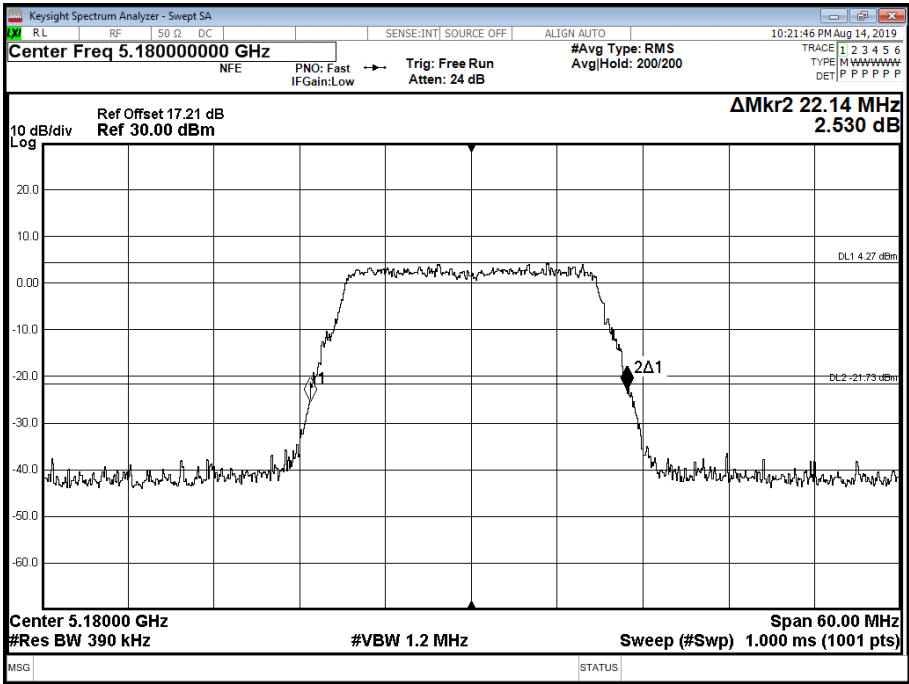


Figure 97 - 5180 MHz - 26 dB Emission Bandwidth

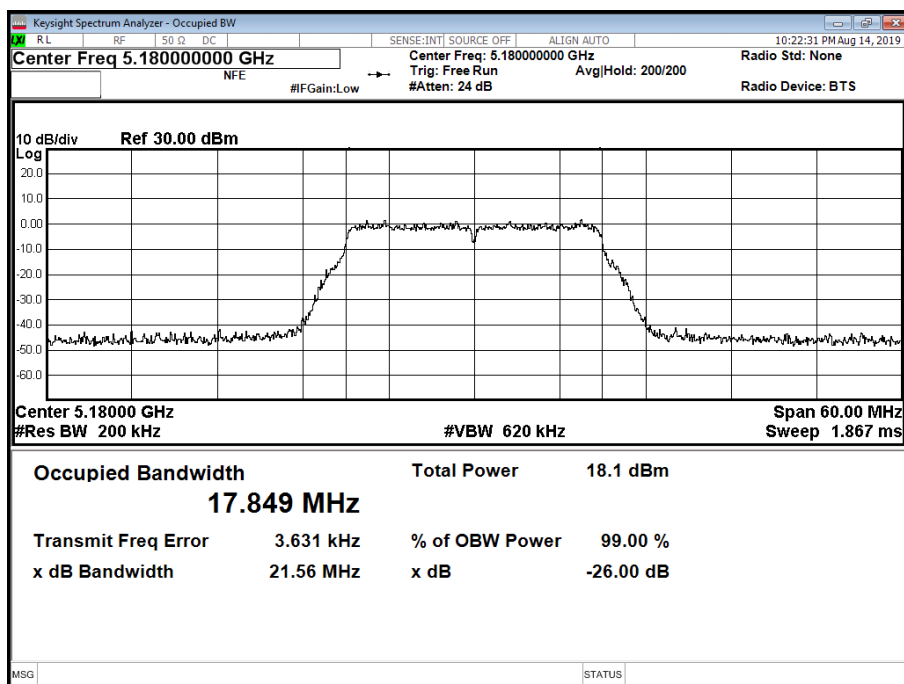


Figure 98 - 5180 MHz - 99% Occupied Bandwidth

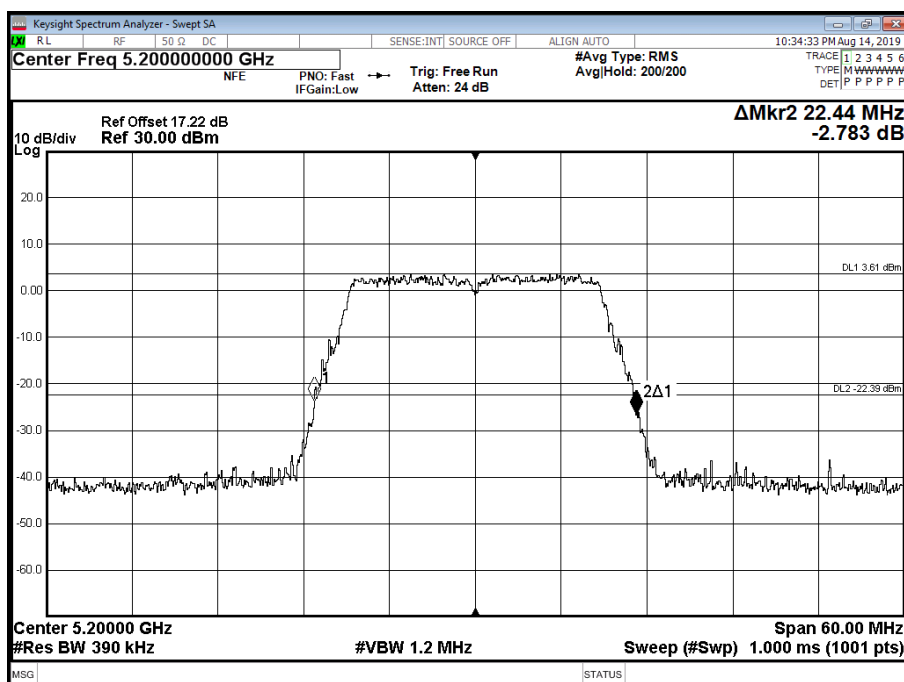


Figure 99 - 5200 MHz - 26 dB Emission Bandwidth

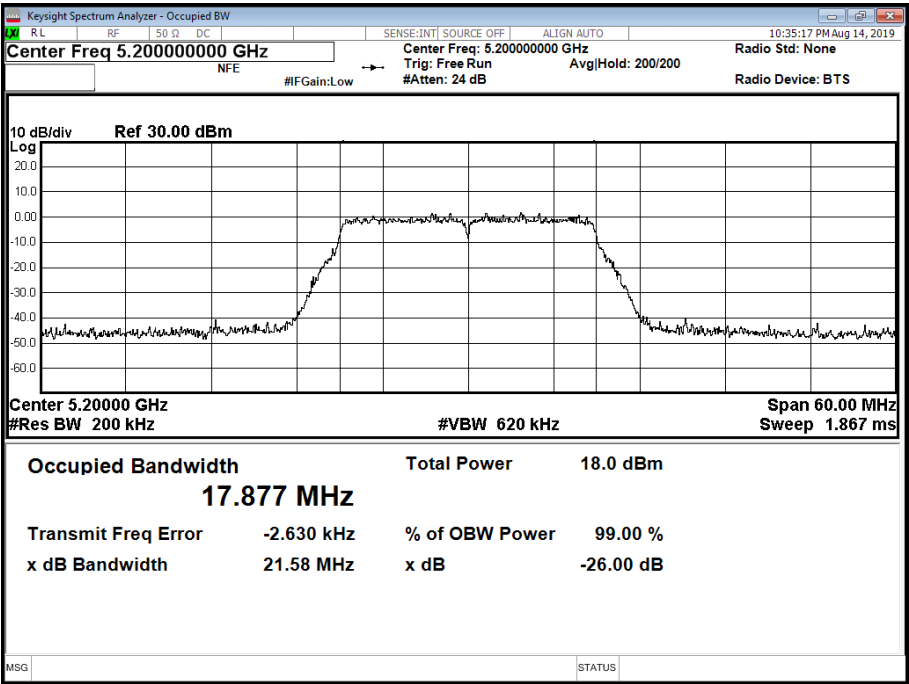


Figure 100 - 5200 MHz - 99% Occupied Bandwidth

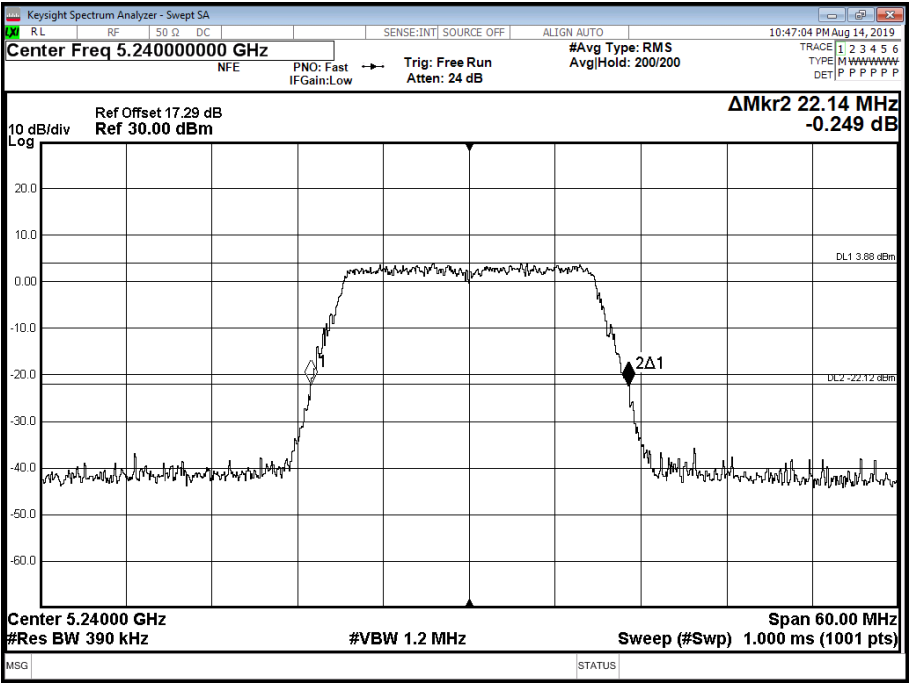


Figure 101 - 5240 MHz - 26 dB Emission Bandwidth

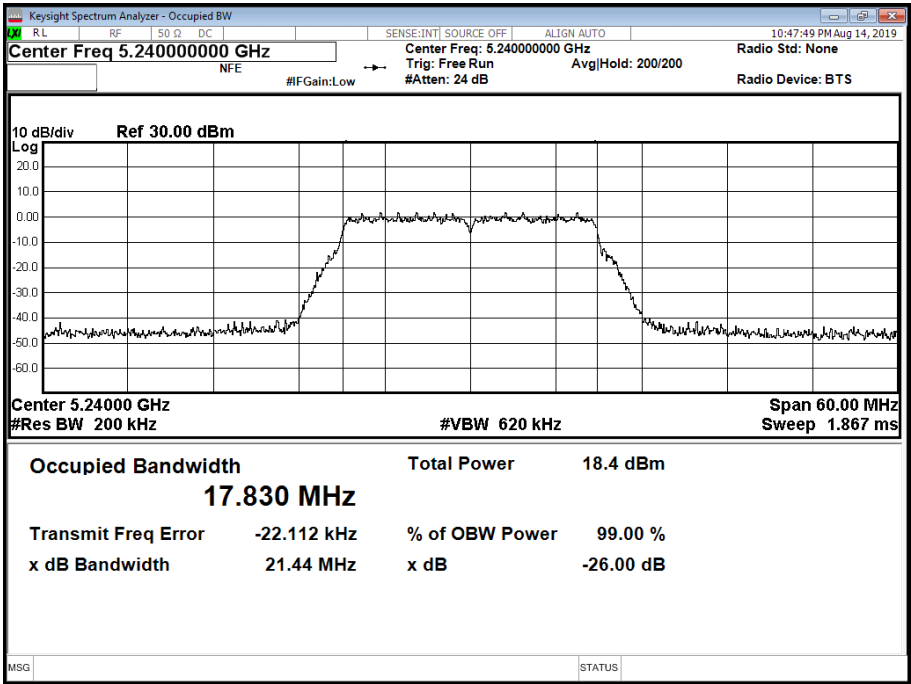


Figure 102 - 5240 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	5180	5200	5240
26 dB Bandwidth (MHz)	22.140	22.020	22.140
99% Bandwidth (MHz)	17.895	17.872	17.872

Table 311 - 802.11n / HT20 MCS0 / Aux Core / Country Code CA

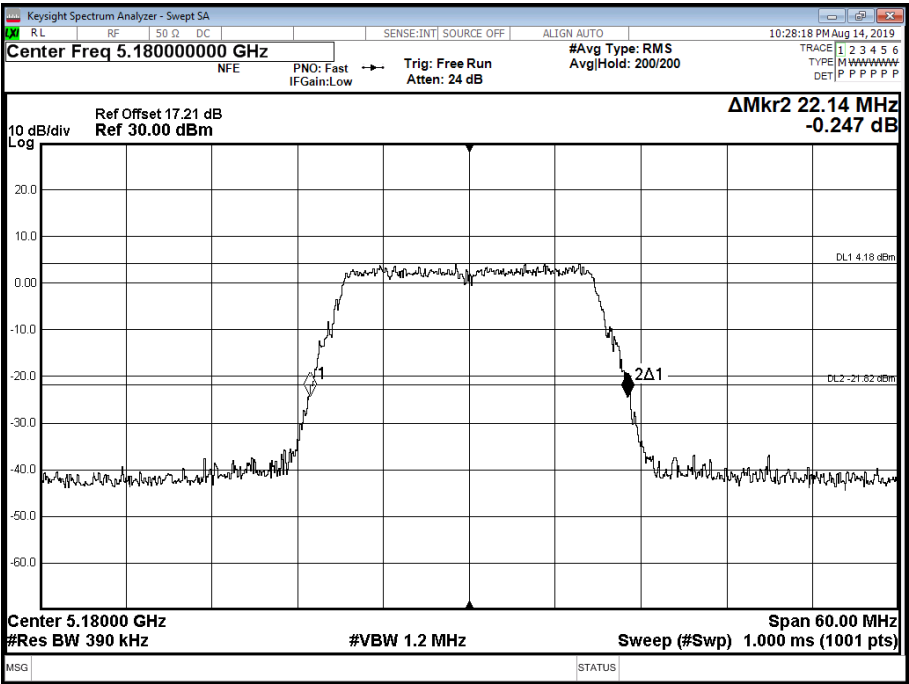


Figure 103 - 5180 MHz - 26 dB Emission Bandwidth

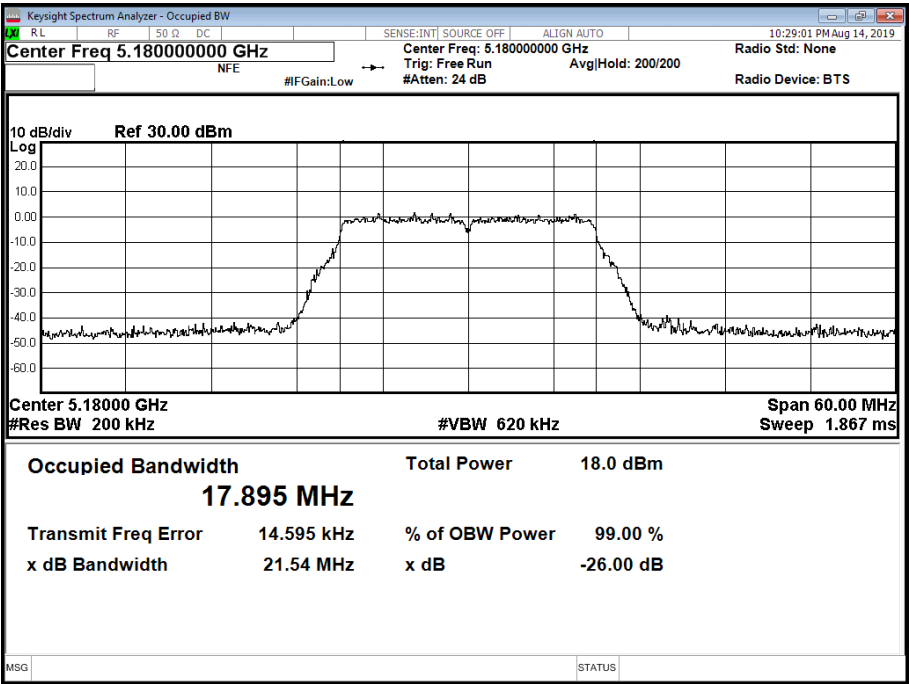


Figure 104 - 5180 MHz - 99% Occupied Bandwidth

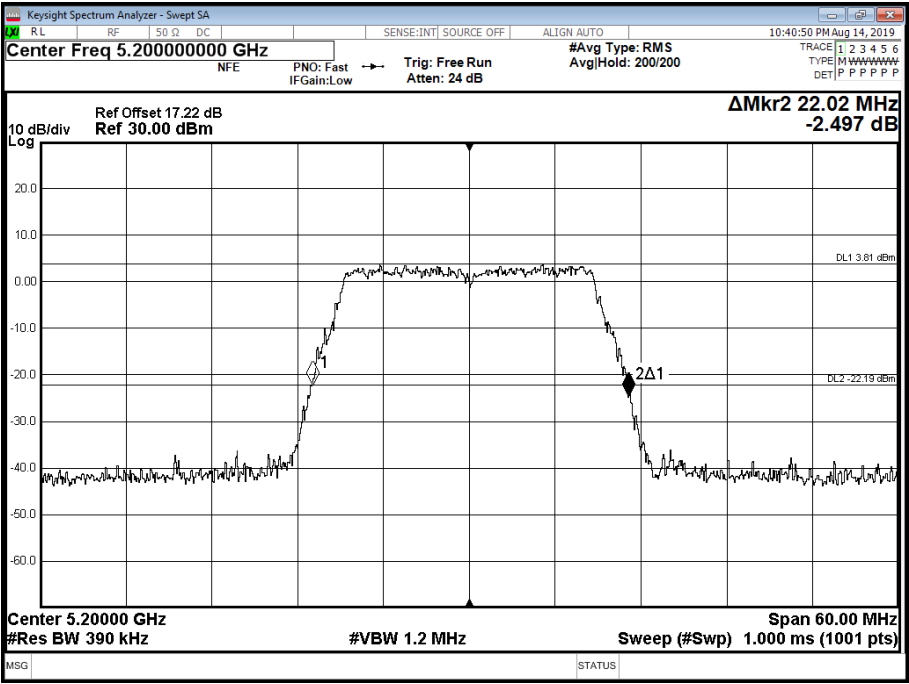


Figure 105 - 5200 MHz - 26 dB Emission Bandwidth

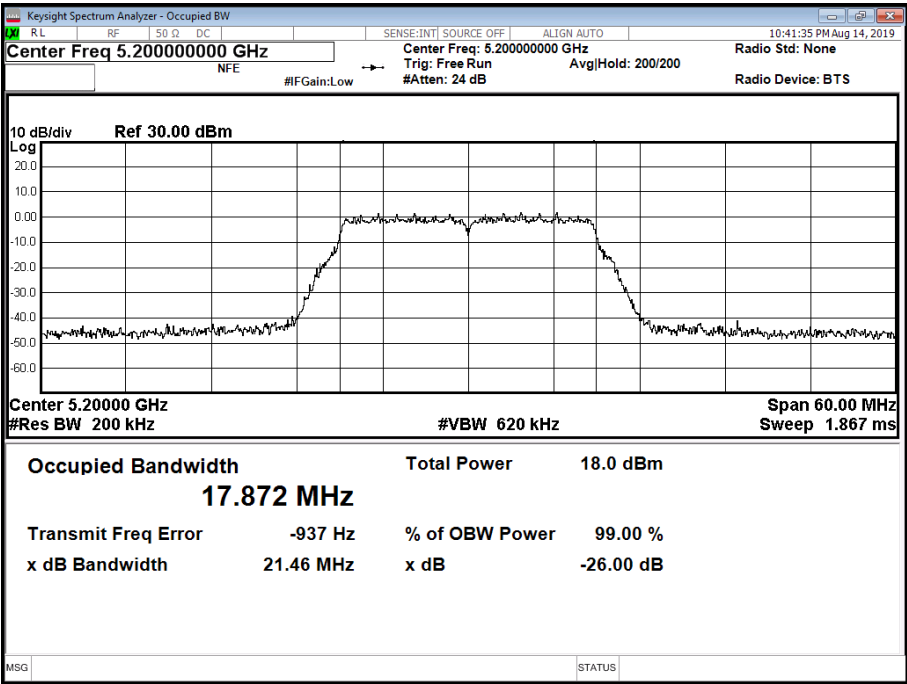


Figure 106 - 5200 MHz - 99% Occupied Bandwidth

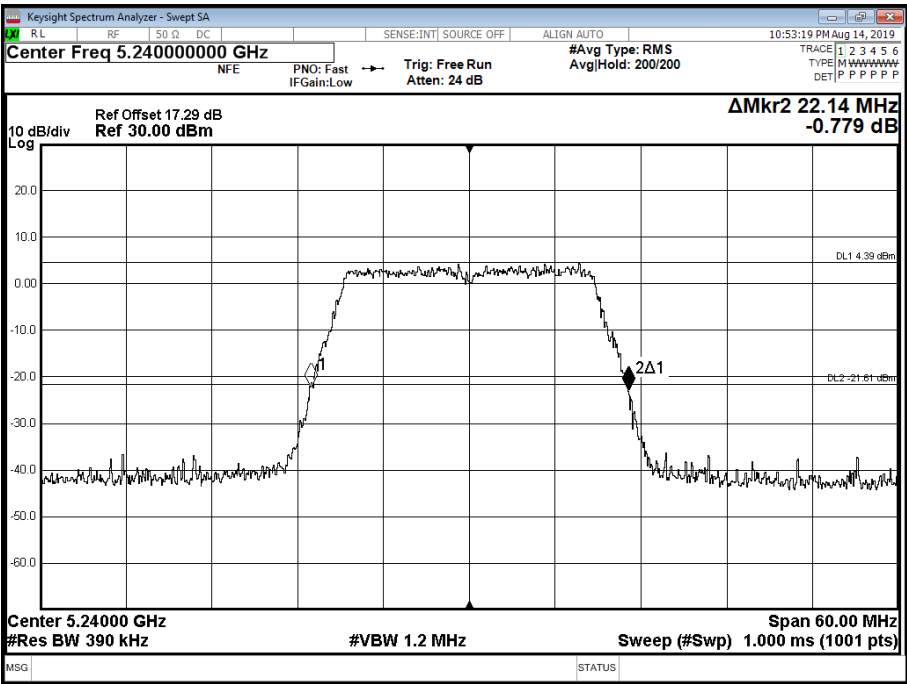


Figure 107 - 5240 MHz - 26 dB Emission Bandwidth

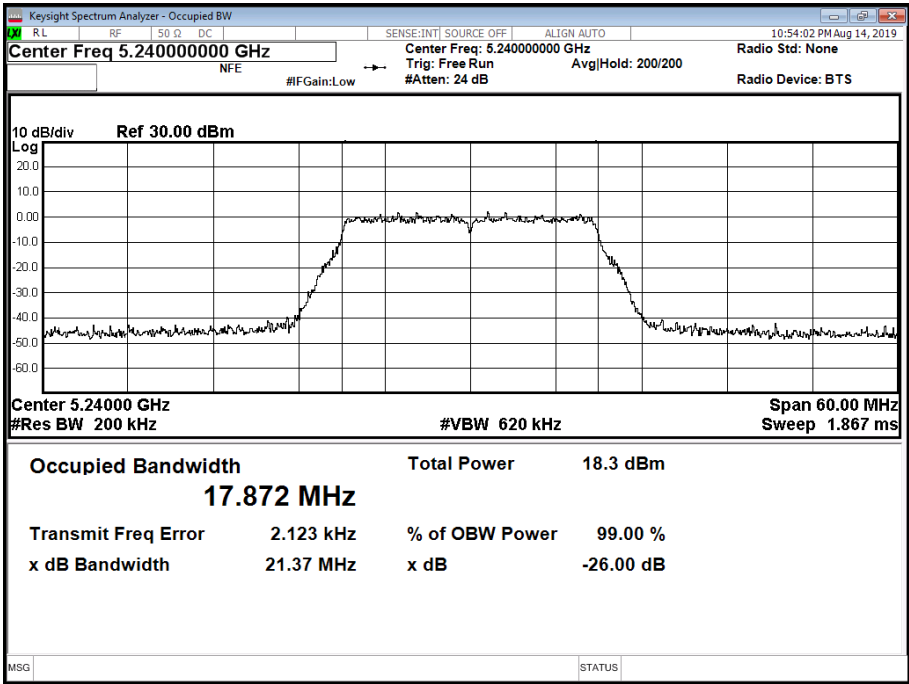


Figure 108 - 5240 MHz - 99% Occupied Bandwidth