


产品实物图片Product picture

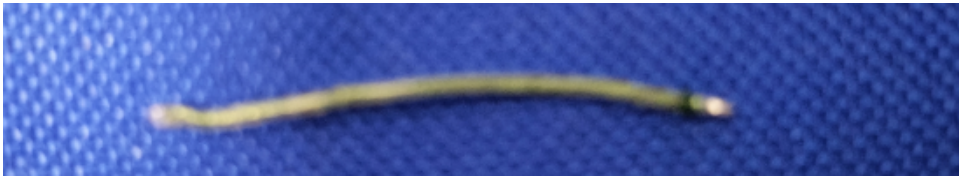


规格表Specification

A. Electrical Properties	
Frequency Rang频段范围	2.4-2.5GHz
Impedance特性阻抗	50Ω Nominal
VSWR电压驻波比	2.0Max.
Gain(peak)增益（峰值）	2.06
Efficiency效率	>40%
Out of roundness不圆度	3.0 dBi (Max.)
Radiation辐射方式	Omni-Directional/全向
Polarization极化方式	Linear Vertical/垂直
C. Environmental	
Storage Temp存储环境范围	-10℃~+60℃
Operating Temp工作环境	-40℃~+65℃
Storage humidity存储湿度	95%
Working humidity工作湿度	5%~95%


电性测试报告Electrical Test Report

Test equipment

OTA 系統架構圖

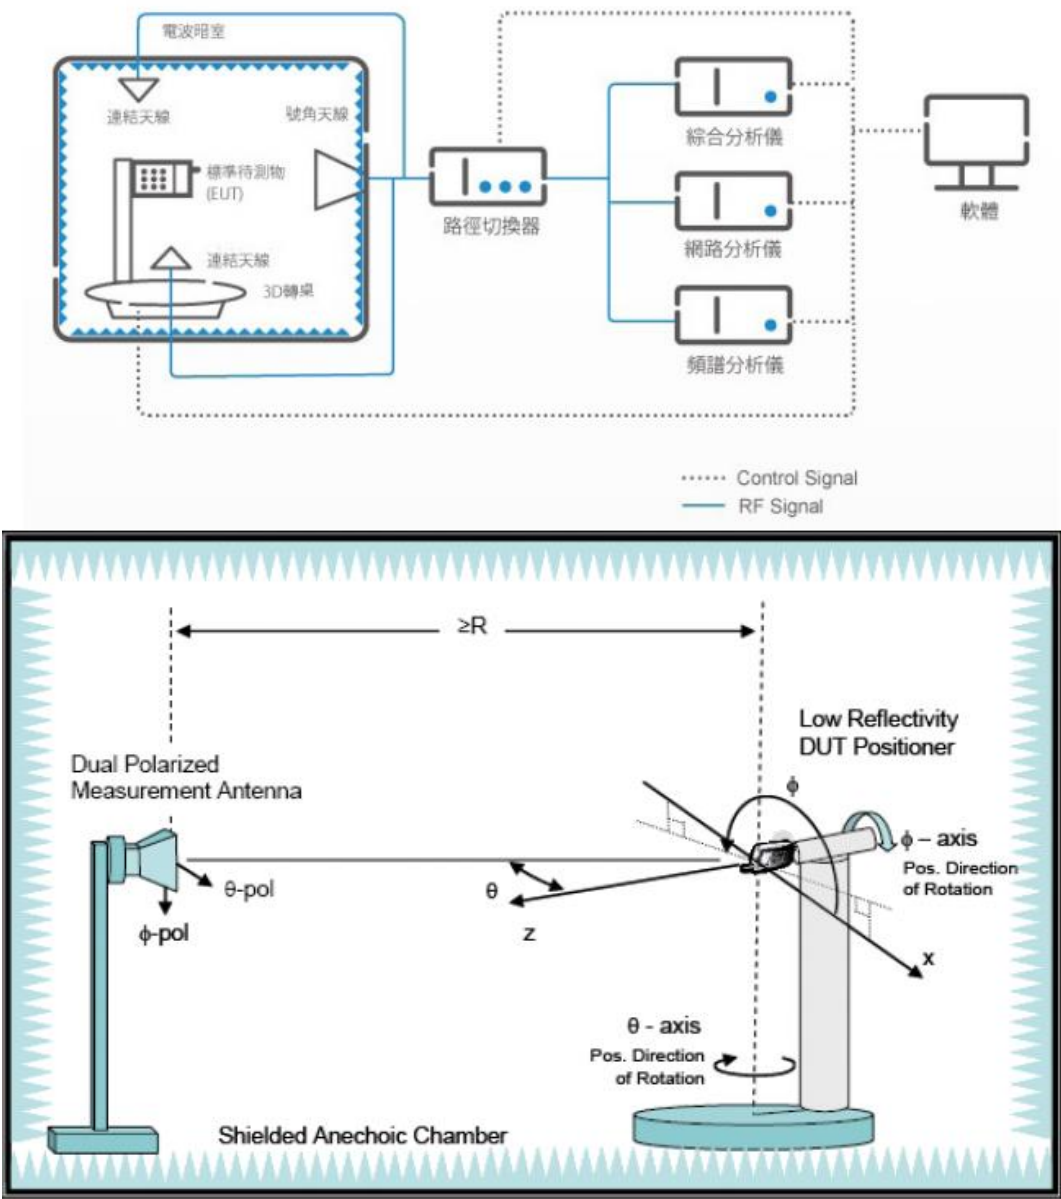

暗室2D、3DRaditation Pattern

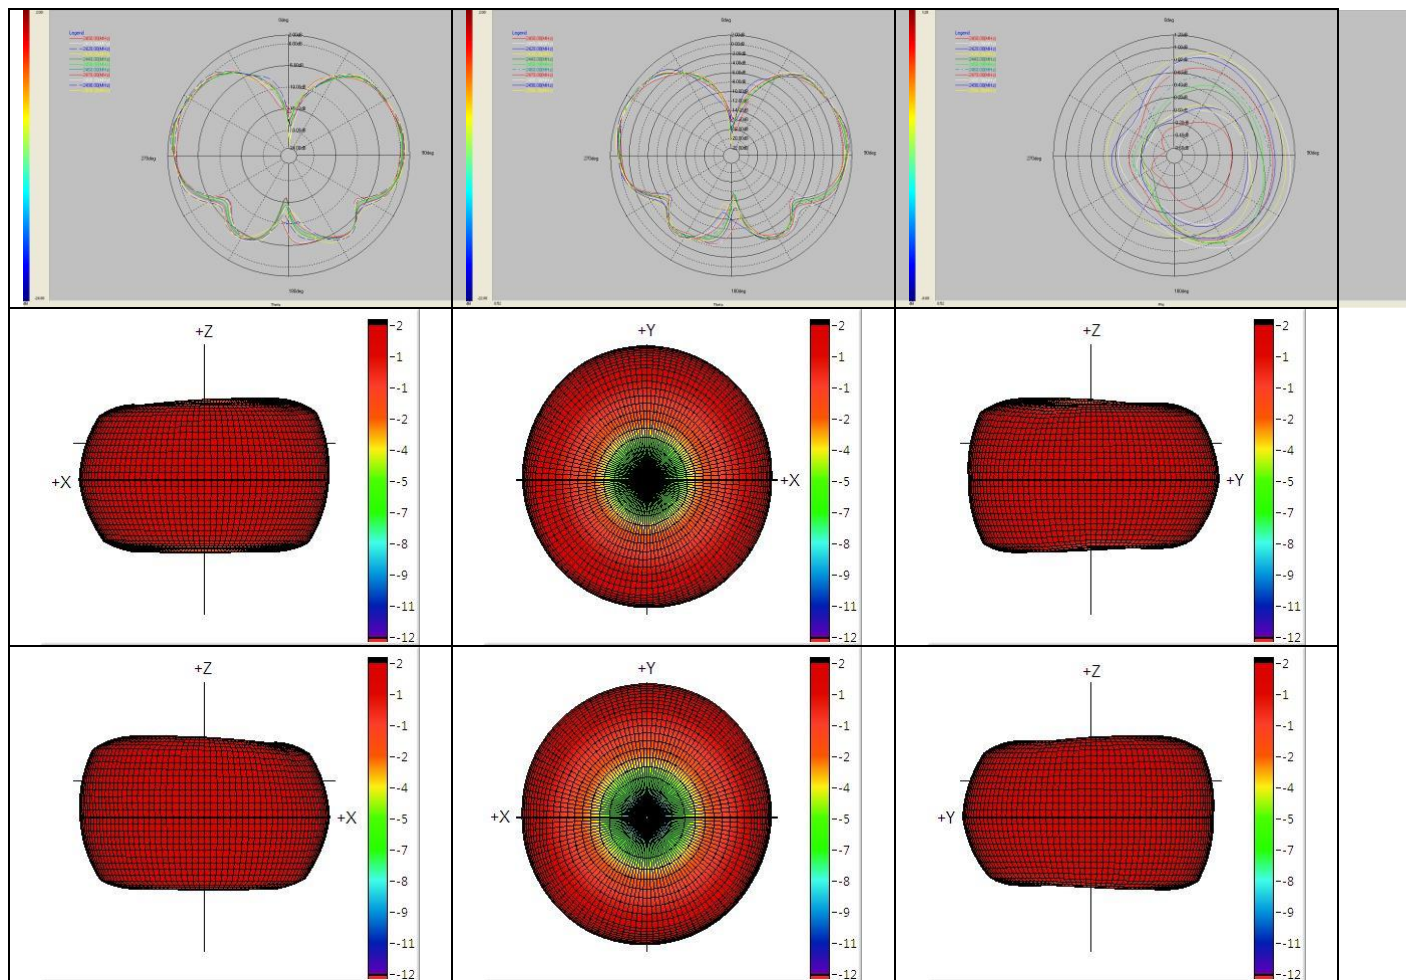

暗室无源测试数据 Dark room passive test data

频率(Mhz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
效率 (%)	70.54	75.31	74.92	72.6	68.52	67.09	67.62	64.99	59.18
增益 (dBi)	1.78	1.93	2.06	1.93	1.64	1.28	1.12	0.83	0.32