



Part 15 Antenna Gains Test Report  
Model 2095

Table of Contents

1. Antenna Gains Summary ..... 3

2. Test Method and Test Setup ..... 4

    i. Passive Gain Calibration and Test Method ..... 4

    ii. Radiation Pattern and Gain Measurement ..... 4

3. Antenna Manufacturer and Gains..... 6

    i. Peak Gain Details ..... 7

    ii. Directional MIMO Gain Details ..... 7

4. Radiated Characteristics of Antennas in Host Platform ..... 9

Record of Revisions ..... 29



Authorizing Party:

Zack Gray, Microsoft

A handwritten signature in black ink that reads "Zack Gray".

## 1. Antenna Gains Summary

The purpose of this report is to explain how the antenna gains for the unlicensed transmitters of the given device were measured and evaluated.

The device has two antennas which are used for WLAN / Bluetooth Tx / Rx.

- The peak gains of each antenna were measured separately. These peak gains are used in any SISO evaluations in the unlicensed test reports.
- Additionally, the directional MIMO gains of the two-antenna system were evaluated as allowed by **KDB 662911 D03 MIMO Antenna Gain Measurement v01** and confirmed through Inquiry. The following directional MIMO gains were determined:
  - Uncorrelated Directional MIMO Gains. These gains are used in the unlicensed test reports for power measurements of all WLAN modes and power spectral density (PSD) measurements of WLAN operating modes with uncorrelated signals, as per ANSI C63.10.
  - Correlated Directional MIMO Gains. These gains are used in unlicensed test reports for PSD measurements of WLAN operating modes with correlated signals, such as cyclic delay diversity (CDD.)

The summary of the Peak Gains and Directional MIMO Gains are given below.

| 2095 Gains | Frequency (MHz) | Left Antenna Peak Gain (Chain 2) (dBi) | Right Antenna Peak Gain (Chain 1) (dBi) | Uncorrelated Directional MIMO Gain (dBi) | Correlated Directional MIMO Gain (dBi) |
|------------|-----------------|----------------------------------------|-----------------------------------------|------------------------------------------|----------------------------------------|
| Bands      |                 |                                        |                                         |                                          |                                        |
| 2.4GHz     | 2400-2483.5     | 2.01                                   | 3.60                                    | 0.75                                     | 3.48                                   |
| UNII-1     | 5150-5250       | 7.41                                   | 5.11                                    | 5.95                                     | 8.78                                   |
| UNII-2A    | 5250-5350       | 7.41                                   | 5.52                                    | 5.95                                     | 8.78                                   |
| UNII-2C    | 5470-5725       | 6.97                                   | 5.92                                    | 6.25                                     | 9.25                                   |
| UNII-3     | 5725-5850       | 6.96                                   | 5.92                                    | 6.25                                     | 9.25                                   |
| UNII-4     | 5850-5895       | 6.11                                   | 5.54                                    | 5.40                                     | 8.37                                   |
| UNII-5     | 5925-6425       | 6.20                                   | 5.27                                    | 5.61                                     | 8.60                                   |
| UNII-6     | 6425-6525       | 5.04                                   | 4.75                                    | 4.54                                     | 7.55                                   |
| UNII-7     | 6525-6875       | 5.58                                   | 6.52                                    | 5.84                                     | 8.81                                   |
| UNII-8     | 6875-7125       | 6.33                                   | 6.52                                    | 5.84                                     | 8.81                                   |

## 2. Test Method and Test Setup

- Measurement Facility: Microsoft Antenna Lab
- Dates of Testing: 10/22/2024 to 10/25/2024
- Equipment: MVG Starlab (formerly known as Satimo)
- Calibration Verification: A reference calibration dipole was measured before the device was tested and compared to the reported values of the manufacturer to verify that the chamber calibration is within measurement uncertainty and in good standing.

| Item | Equipment                         | Manufacturer | Model        | Calibration / Validation Due |
|------|-----------------------------------|--------------|--------------|------------------------------|
| 1    | SATIMO chamber                    | MVG          | StarGate     | 02/12/2025                   |
| 2    | NPAC (New Probe Array Controller) | MVG          | N/A          | 03/29/2025                   |
| 3    | Network Analyzer                  | Keysight     | PNA-L N5232A | April 2025                   |
| 4    | Validation Dipole                 | MVG          | WD3000       | 1/12/2025                    |
| 5    | Validation Dipole                 | MVG          | WD6000       | 1/12/2025                    |

### i. Passive Gain Calibration and Test Method



The calibration of the chamber is performed using gain by substitution method. A reference calibration dipole with known antenna gain and efficiency connected in the middle of the chamber in the quiet zone is measured and a calibration file that includes offset values for each frequency to adjust the losses of the system is generated. The device under test was tested the same way as the calibration dipoles and the calibration file described above is used to calculate the gain of each embedded antenna.

### ii. Radiation Pattern and Gain Measurement

The radiation pattern and gain measurements were done in the MVG Starlab fully anechoic chamber. The antenna gain reported is the maximum measured in both horizontal and vertical polarizations. The measurement step size in both the Phi ( $\phi$ ) and Theta ( $\theta$ ) measurement axes was 3 degrees, meeting the requirements to use Directional MIMO Gains evaluation method.

# Test Method, Setup, Block Diagram

- This test report is prepared for host antenna testing under a Full Anechoic Chamber (MVG StarGate64 SISO).
- Test Date(s):  
10/22/2024 to 10/25/2024
- Test Engineer: Chulmin Han

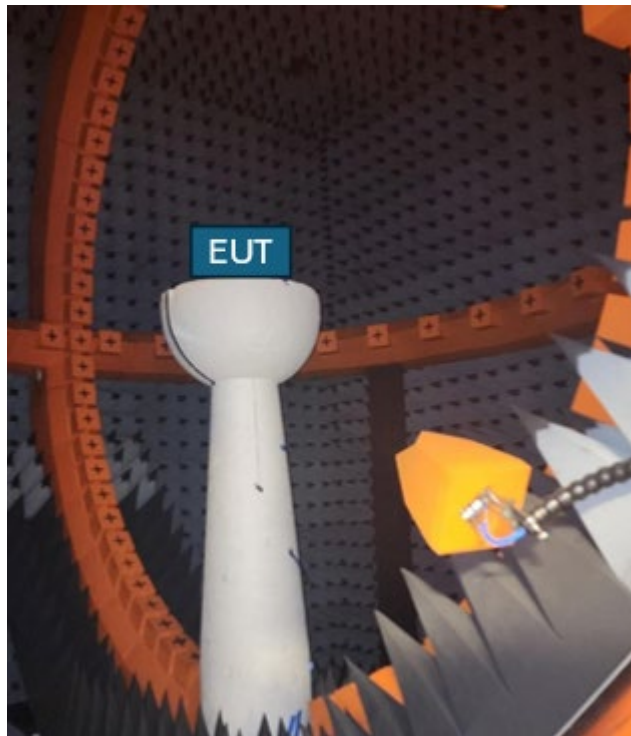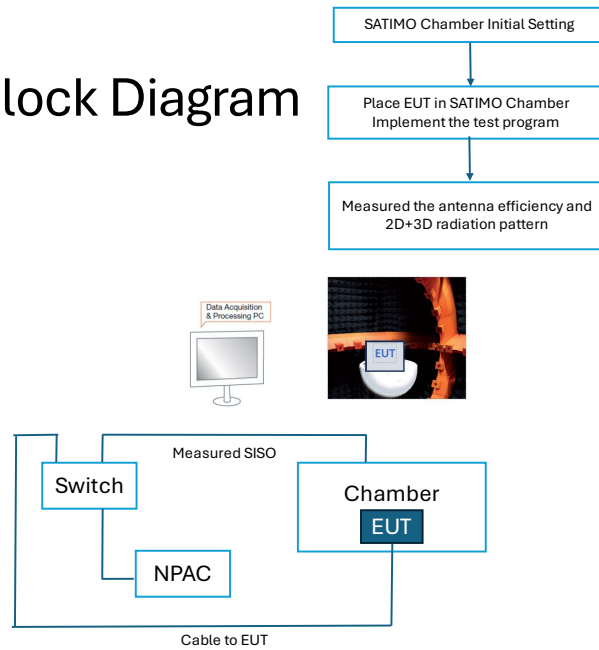

### 3. Antenna Manufacturer

|                        |                                                              |
|------------------------|--------------------------------------------------------------|
| Antenna manufacturer 1 | Shanghai Amphenol Airwave Communication Electronics Co., Ltd |
| Antenna Part number    | Main: 1415-0AY20QS<br>Aux: 1415-0AY20QS                      |
| Antenna type           | PIFA                                                         |

|                        |                                         |
|------------------------|-----------------------------------------|
| Antenna manufacturer 2 | ADVANCED WIRELESS & ANTENNA INC.        |
| Antenna Part number    | Main: 1415-0AX70QS<br>Aux: 1415-0AX70QS |
| Antenna type           | PIFA                                    |

## i. Peak Gain Details

| 2095<br>Peak<br>Gains | Frequency<br>(MHz) | Left Antenna Peak Gain<br>(Chain 2) |         |           | Right Antenna Peak Gain<br>(Chain 1) |         |           |
|-----------------------|--------------------|-------------------------------------|---------|-----------|--------------------------------------|---------|-----------|
|                       |                    | Peak Gain<br>(dBi)                  | Phi (°) | Theta (°) | Peak Gain<br>(dBi)                   | Phi (°) | Theta (°) |
| 2.4GHz                | 2400-2483.5        | 2.01                                | 63      | -21       | 3.60                                 | 33      | -54       |
| UNII-1                | 5150-5250          | 7.41                                | 177     | -12       | 5.11                                 | 129     | -162      |
| UNII-2A               | 5250-5350          | 7.41                                | 177     | -12       | 5.52                                 | 24      | -9        |
| UNII-2C               | 5470-5725          | 6.97                                | 0       | 15        | 5.92                                 | 45      | -6        |
| UNII-3                | 5725-5850          | 6.96                                | 177     | -15       | 5.92                                 | 45      | -6        |
| UNII-4                | 5850-5895          | 6.11                                | 0       | 21        | 5.54                                 | 48      | -6        |
| UNII-5                | 5925-6425          | 6.20                                | 0       | 21        | 5.27                                 | 168     | -33       |
| UNII-6                | 6425-6525          | 5.04                                | 3       | -24       | 4.75                                 | 177     | -24       |
| UNII-7                | 6525-6875          | 5.58                                | 3       | -24       | 6.52                                 | 6       | -21       |
| UNII-8                | 6875-7125          | 6.33                                | 174     | -33       | 6.52                                 | 6       | -21       |

## ii. Directional MIMO Gain Details

The Directional MIMO Gains were determined computationally from the standalone antenna gains. For each point in space, the Directional MIMO Gains were calculated by performing both the Uncorrelated and Correlated Gain calculations on the gain values from each antenna at that point in space. The highest results calculation results in each band are used as the Directional gains. Note that in some cases the highest uncorrelated and correlated values occur at different points in space.

These are the directional Gain equations used from KDB 662911 D01 (Section F.2.d), for this case where number of antennas N=2:

$$\text{Uncorrelated Gain} = 10 * \log \frac{10^{\frac{G_1}{10}} + 10^{\frac{G_2}{10}} + \dots + 10^{\frac{G_N}{10}}}{N \text{ ANT}} \text{ dBi}$$

$$\text{Correlated Gain} = 10 * \log \frac{(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + \dots + 10^{\frac{G_N}{20}})^2}{N \text{ ANT}} \text{ dBi}$$

These equations were applied at all measurement points for the two antennas, at all frequencies. The highest Uncorrelated and Correlated Directional MIMO Gains values with their locations in space are as follows:

| <b>2095<br/>Directional<br/>MIMO<br/>Gains</b> | <b>Frequency<br/>(MHz)</b> | <b>Uncorrelated Directional MIMO<br/>Gain</b> |             |              |                                |                                 | <b>Correlated Directional MIMO Gain</b> |             |              |                                |                                 |
|------------------------------------------------|----------------------------|-----------------------------------------------|-------------|--------------|--------------------------------|---------------------------------|-----------------------------------------|-------------|--------------|--------------------------------|---------------------------------|
| <b>Bands</b>                                   |                            | <b>Uncorr.<br/>Gain<br/>(dBi)</b>             | <b>φ(°)</b> | <b>θ (°)</b> | <b>Left<br/>Gain<br/>(dBi)</b> | <b>Right<br/>Gain<br/>(dBi)</b> | <b>Corr.<br/>Gain<br/>(dBi)</b>         | <b>φ(°)</b> | <b>θ (°)</b> | <b>Left<br/>Gain<br/>(dBi)</b> | <b>Right<br/>Gain<br/>(dBi)</b> |
| 2.4GHz                                         | 2400-2483.5                | <b>0.75</b>                                   | 33          | -54          | -10.58                         | 3.60                            | <b>3.48</b>                             | 108         | -63          | -0.04                          | 1.88                            |
| UNII-1                                         | 5150-5250                  | <b>5.95</b>                                   | 0           | 12           | 7.40                           | 3.75                            | <b>8.78</b>                             | 0           | 12           | 7.40                           | 3.75                            |
| UNII-2A                                        | 5250-5350                  | <b>5.95</b>                                   | 0           | 12           | 7.40                           | 3.75                            | <b>8.78</b>                             | 0           | 12           | 7.40                           | 3.75                            |
| UNII-2C                                        | 5470-5725                  | <b>6.25</b>                                   | 177         | -18          | 6.64                           | 5.82                            | <b>9.25</b>                             | 177         | -18          | 6.64                           | 5.82                            |
| UNII-3                                         | 5725-5850                  | <b>6.25</b>                                   | 177         | -18          | 6.64                           | 5.82                            | <b>9.25</b>                             | 177         | -18          | 6.64                           | 5.82                            |
| UNII-4                                         | 5850-5895                  | <b>5.40</b>                                   | 0           | 21           | 6.11                           | 4.55                            | <b>8.37</b>                             | 0           | 21           | 6.11                           | 4.55                            |
| UNII-5                                         | 5925-6425                  | <b>5.61</b>                                   | 0           | 24           | 6.09                           | 5.07                            | <b>8.60</b>                             | 0           | 24           | 6.09                           | 5.07                            |
| UNII-6                                         | 6425-6525                  | <b>4.54</b>                                   | 6           | -21          | 4.75                           | 4.32                            | <b>7.55</b>                             | 6           | -21          | 4.75                           | 4.32                            |
| UNII-7                                         | 6525-6875                  | <b>5.84</b>                                   | 6           | -21          | 5.03                           | 6.52                            | <b>8.81</b>                             | 6           | -21          | 5.03                           | 6.52                            |
| UNII-8                                         | 6875-7125                  | <b>5.84</b>                                   | 6           | -21          | 5.03                           | 6.52                            | <b>8.81</b>                             | 6           | -21          | 5.03                           | 6.52                            |




## 4. Radiated Characteristics of Antennas in Host Platform

### A. Left Antenna (Chain 2)


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 2400-2483.5     | 2.01                          |

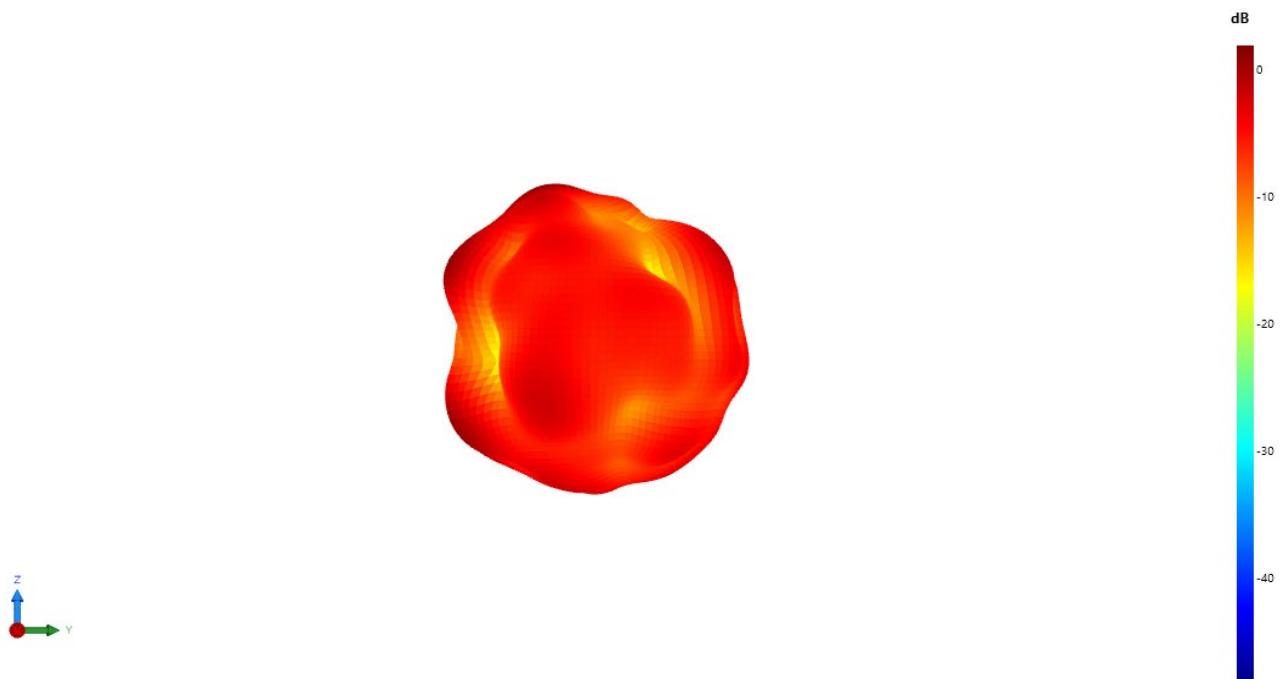


Max Antenna 3D Radiation Pattern 5150-5250 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5150-5250       | 7.41                          |

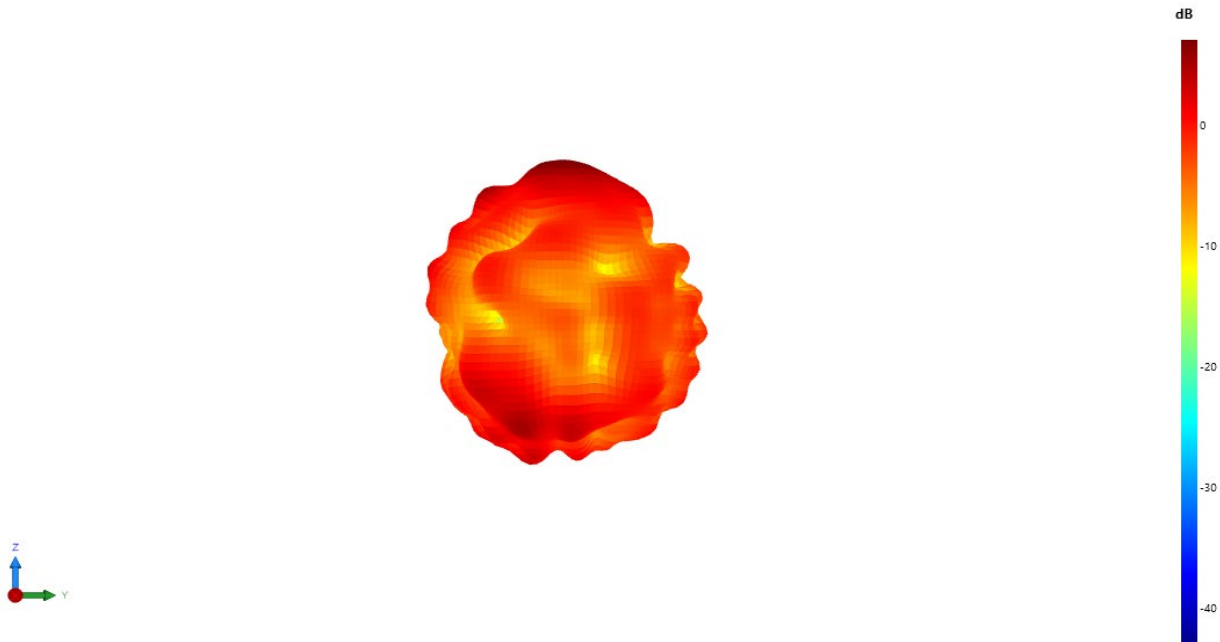


Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350       | 7.41                          |

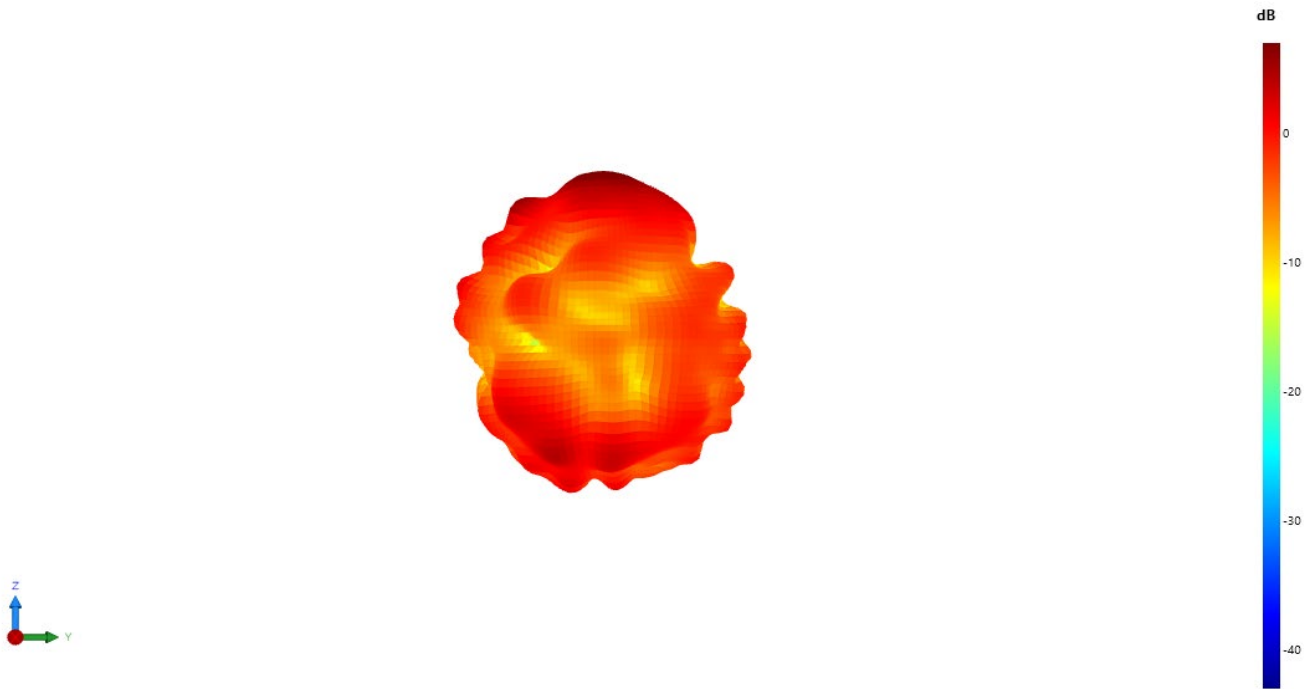


Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5470-5725          | 6.97                             |

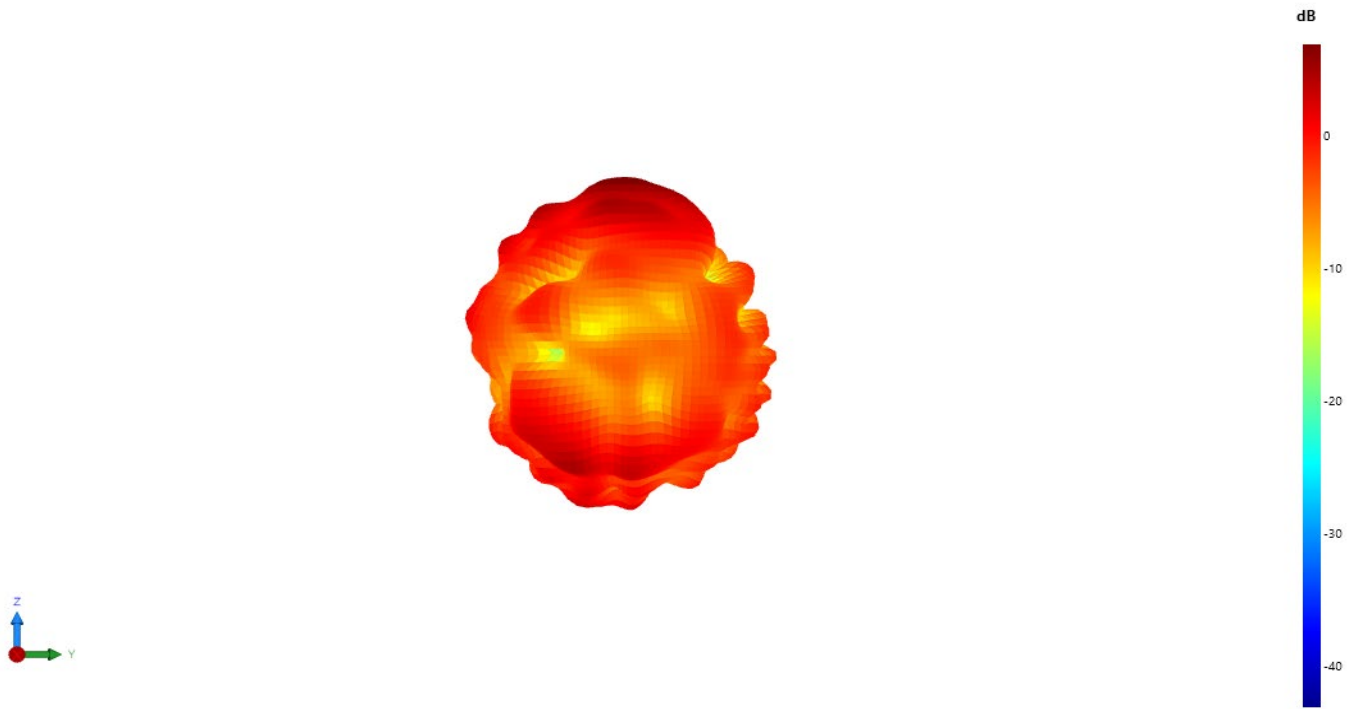


Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5725-5850          | 6.96                             |

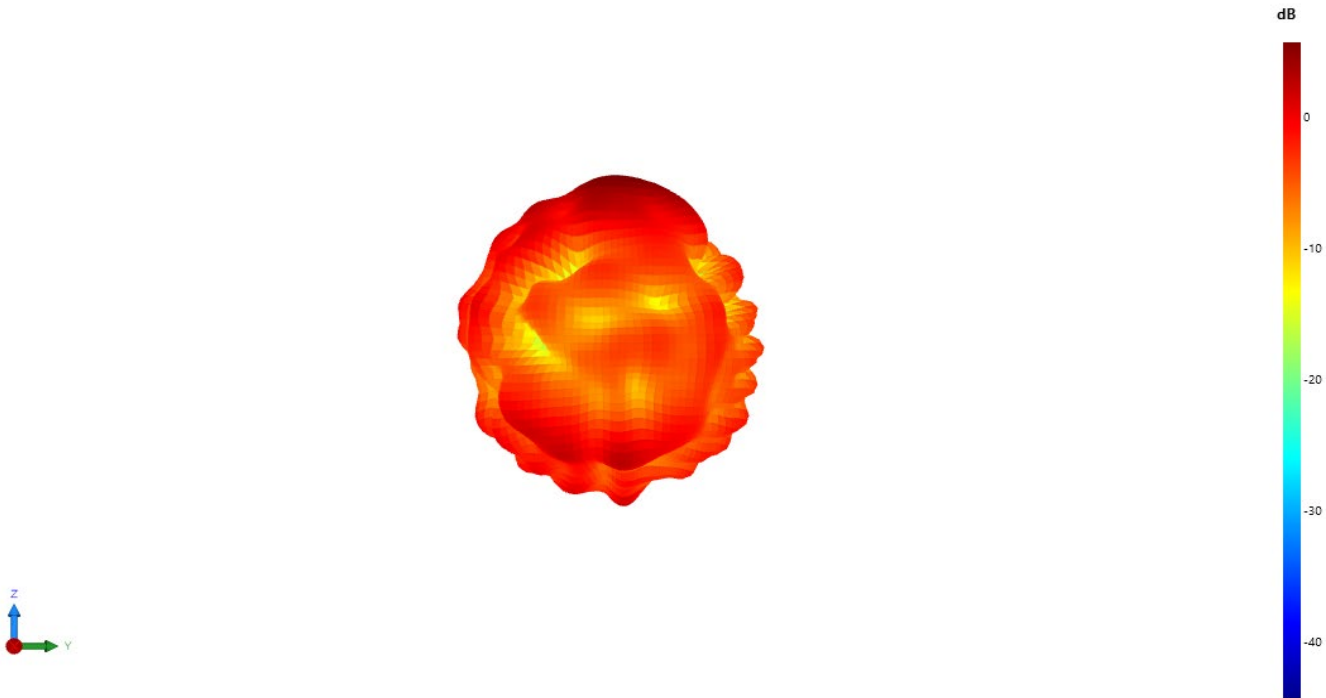


Max Antenna 3D Radiation Pattern 5850-5895 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5850-5895       | 6.11                          |

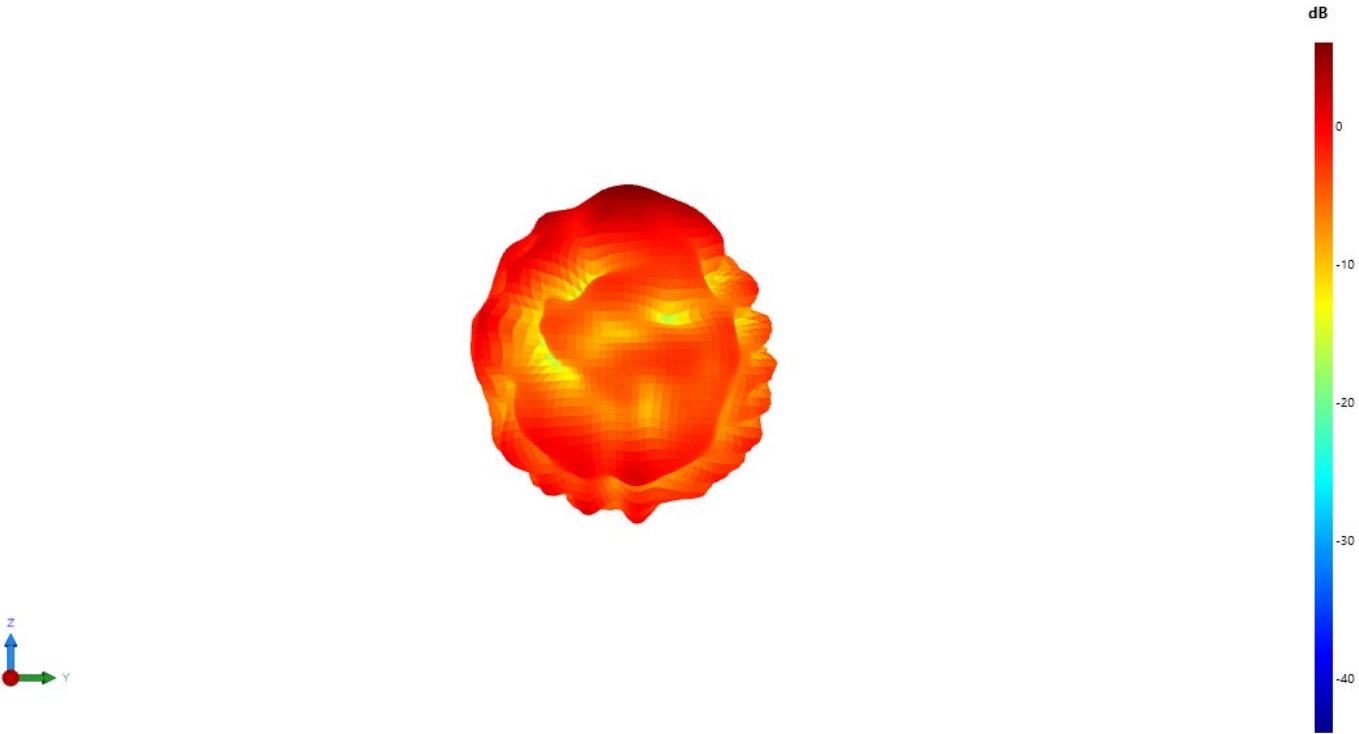


Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5925-6425          | 6.2                              |

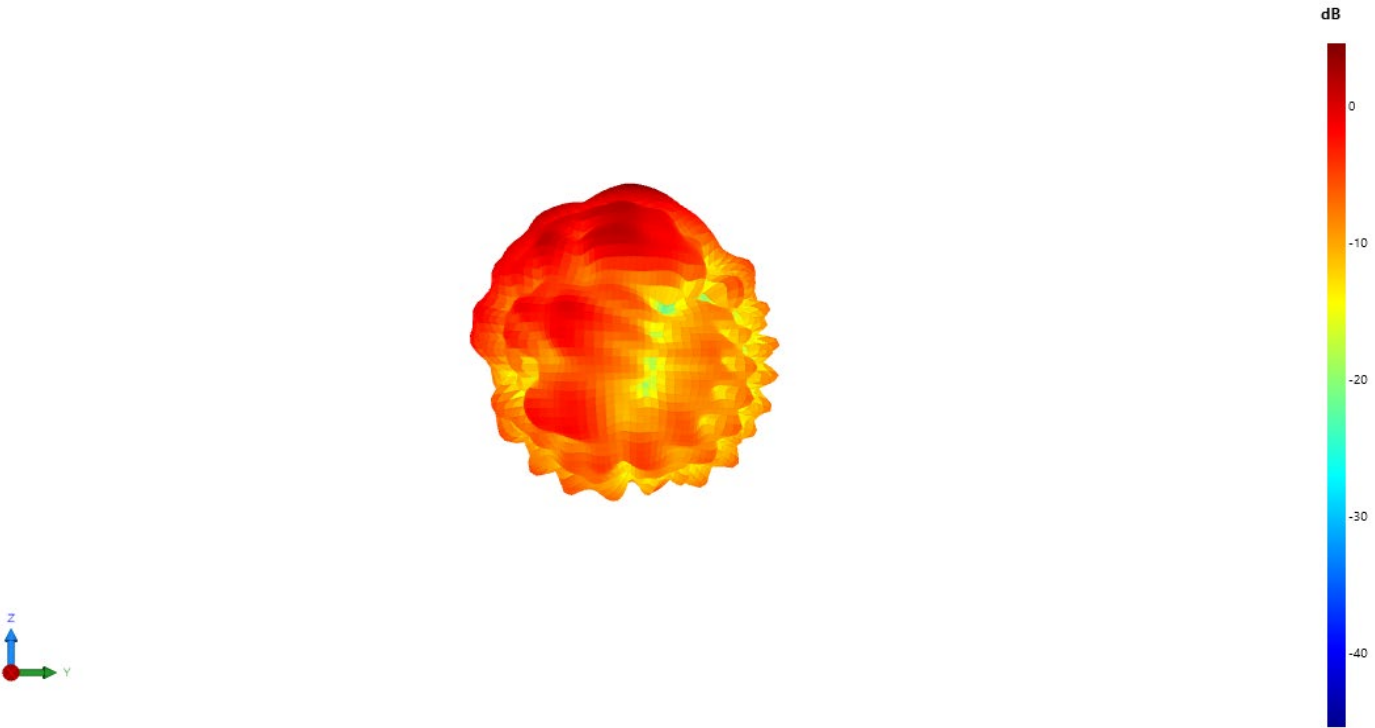

Max Antenna 3D Radiation Pattern 6425-6525 MHz


| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 6425-6525          | 5.04                             |

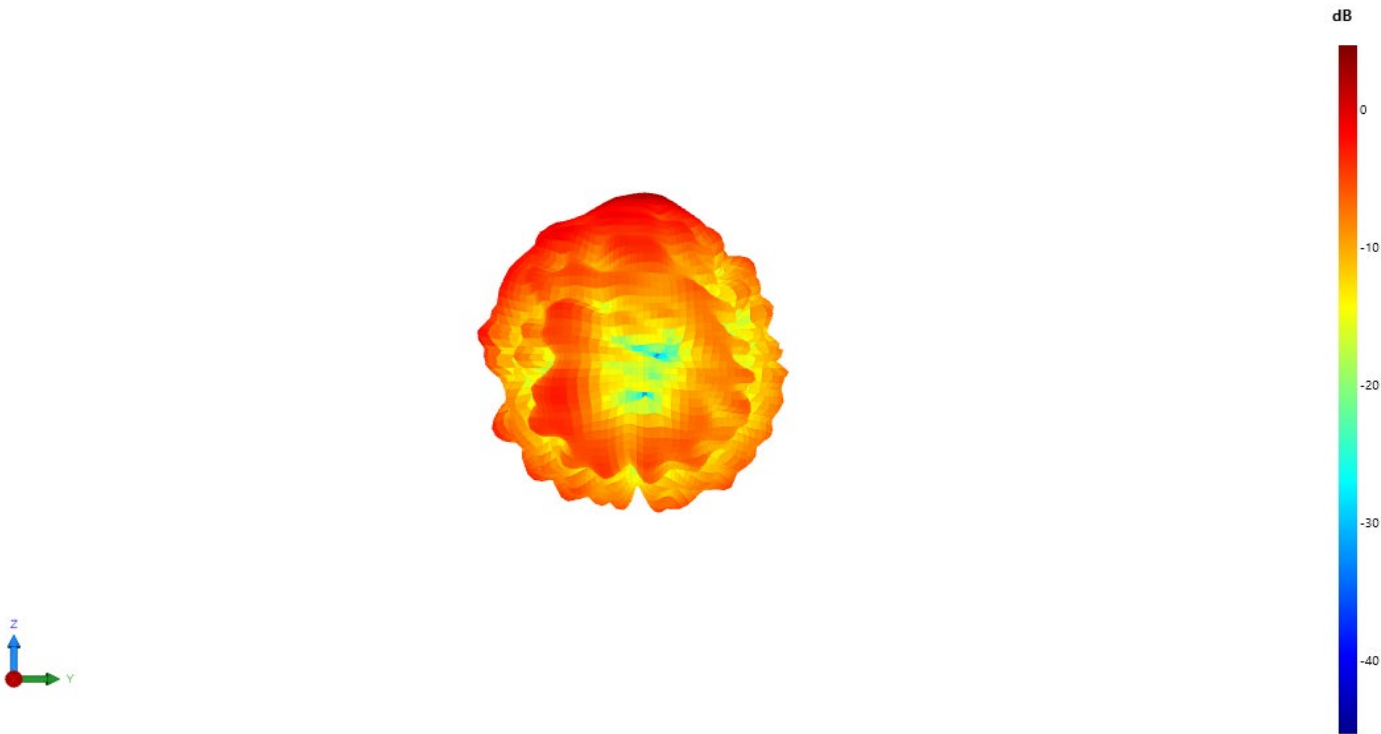




Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 6525-6875       | 5.58                          |

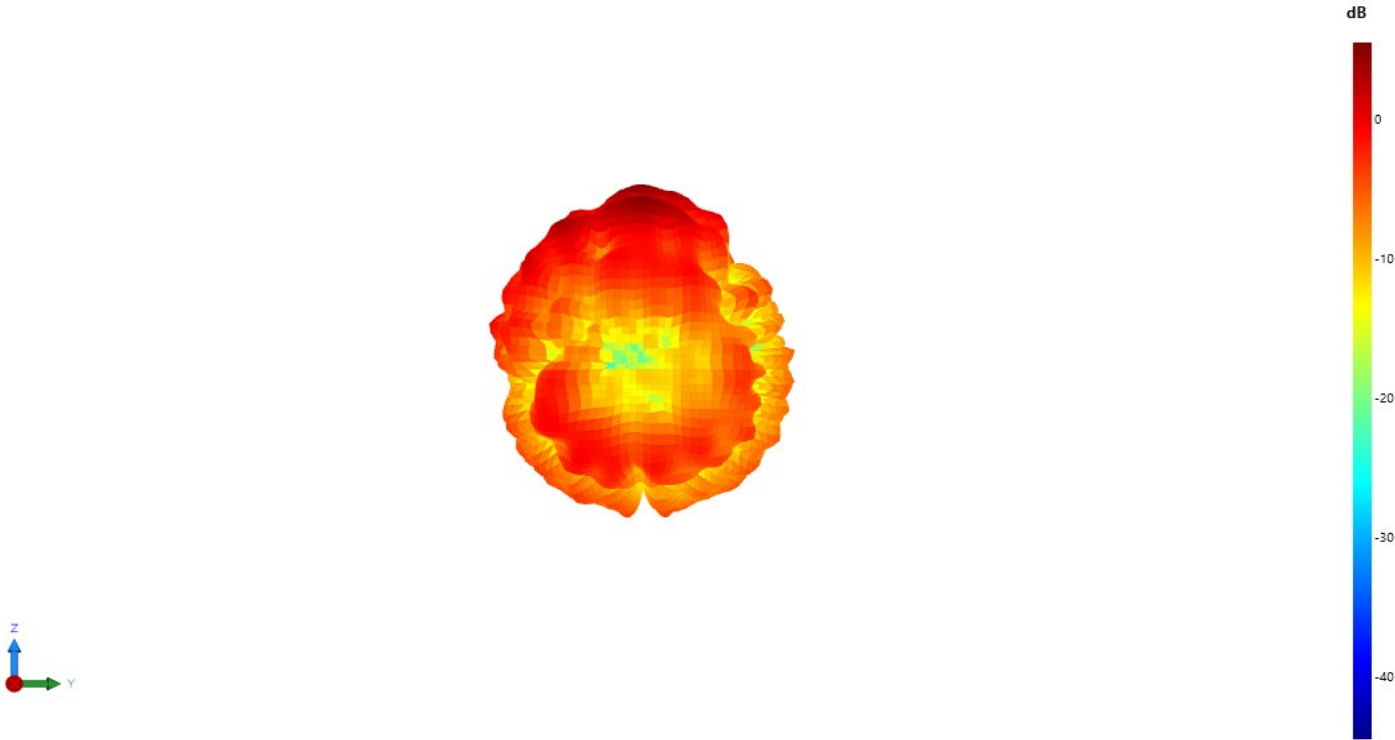

Max Antenna 3D Radiation Pattern 6875-7125 MHz


| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 6875-7125          | 6.33                             |

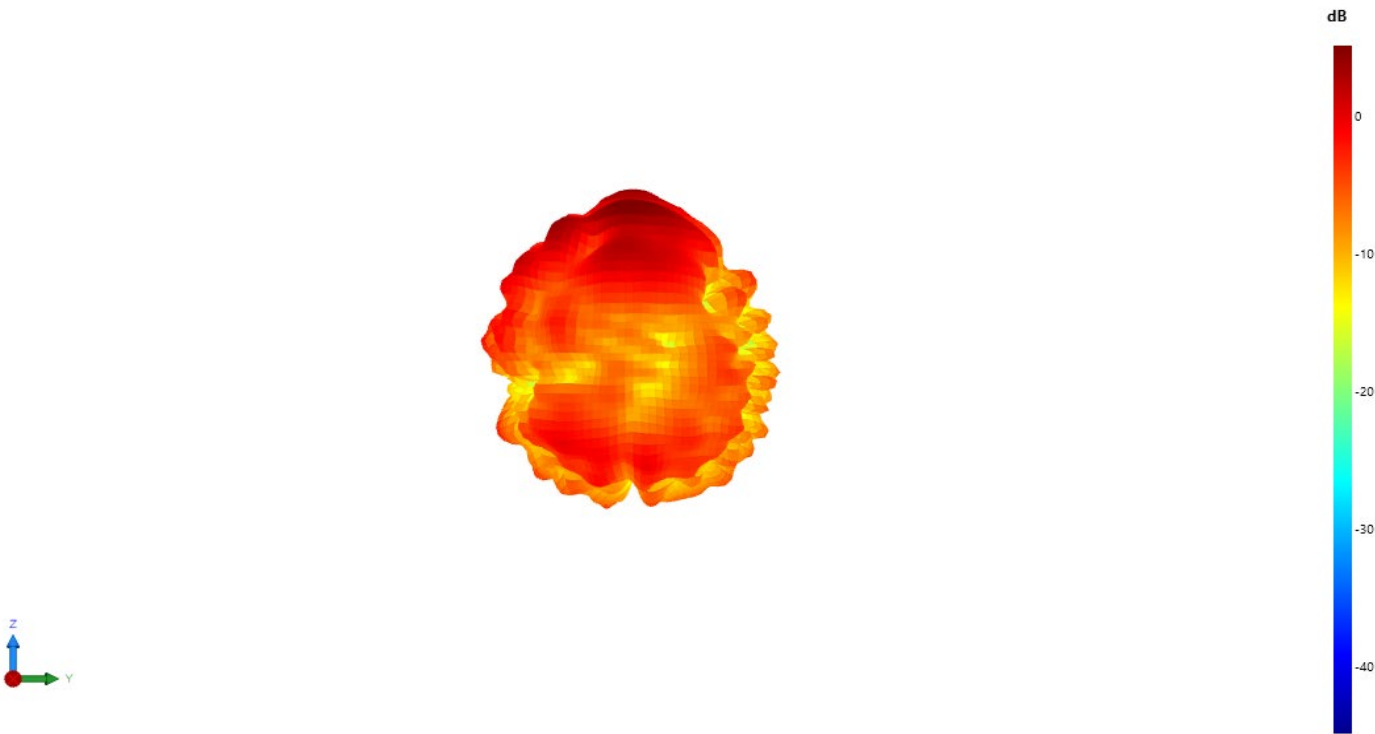

## B. Right Antenna (Chain 1)


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 2400-2483.5        | 3.60                             |

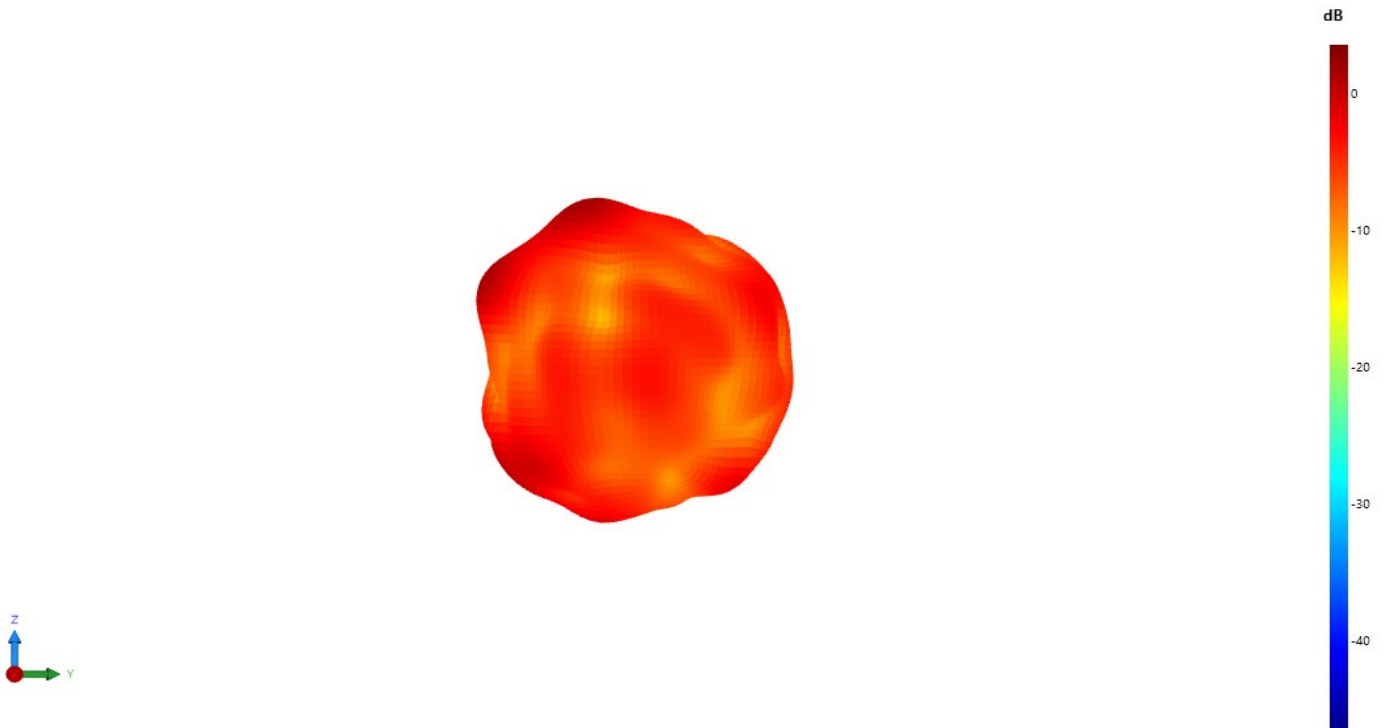


Max Antenna 3D Radiation Pattern 5150-5250 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5150-5250       | 5.11                          |

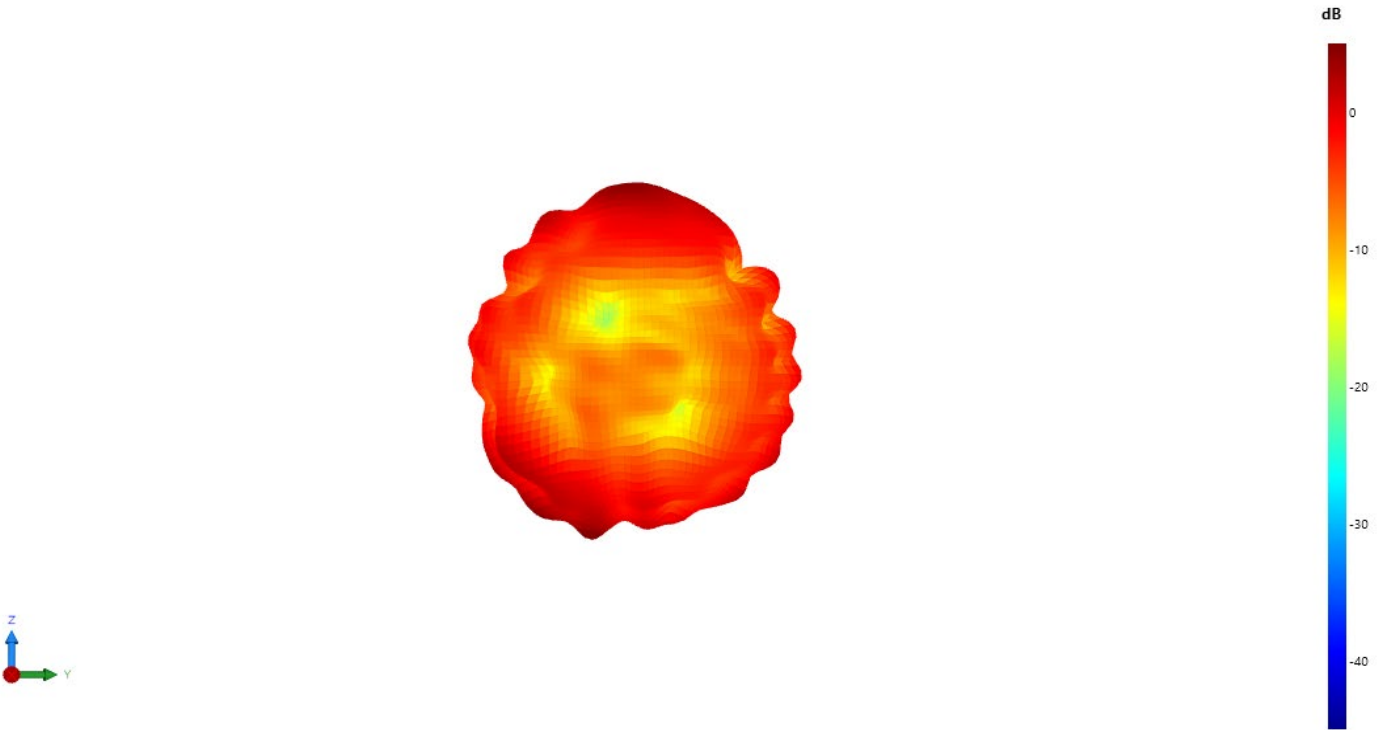


Max Antenna 3D Radiation Pattern 5250-5350 MHz

| Frequency (MHz) | Peak Gain w/ Cable Loss (dBi) |
|-----------------|-------------------------------|
| 5250-5350       | 5.52                          |

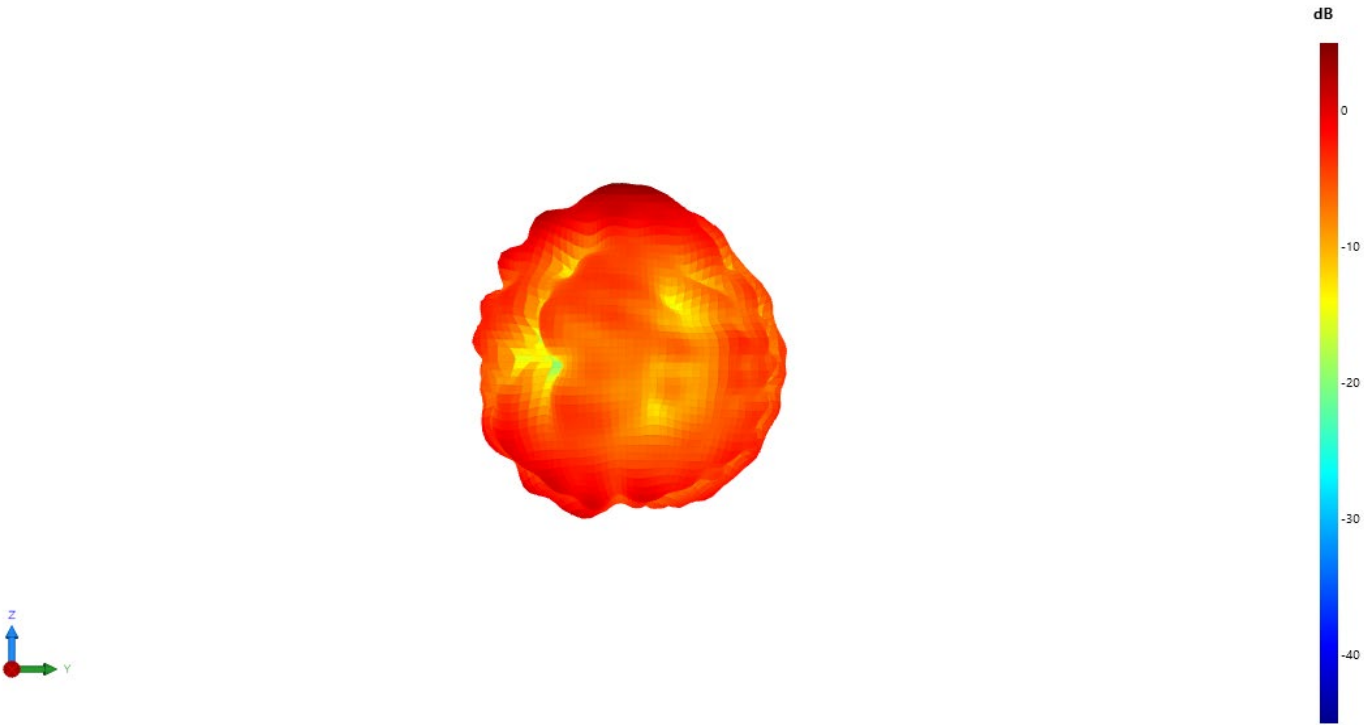


Max Antenna 3D Radiation Pattern 5470-5725 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5470-5725          | 5.92                             |

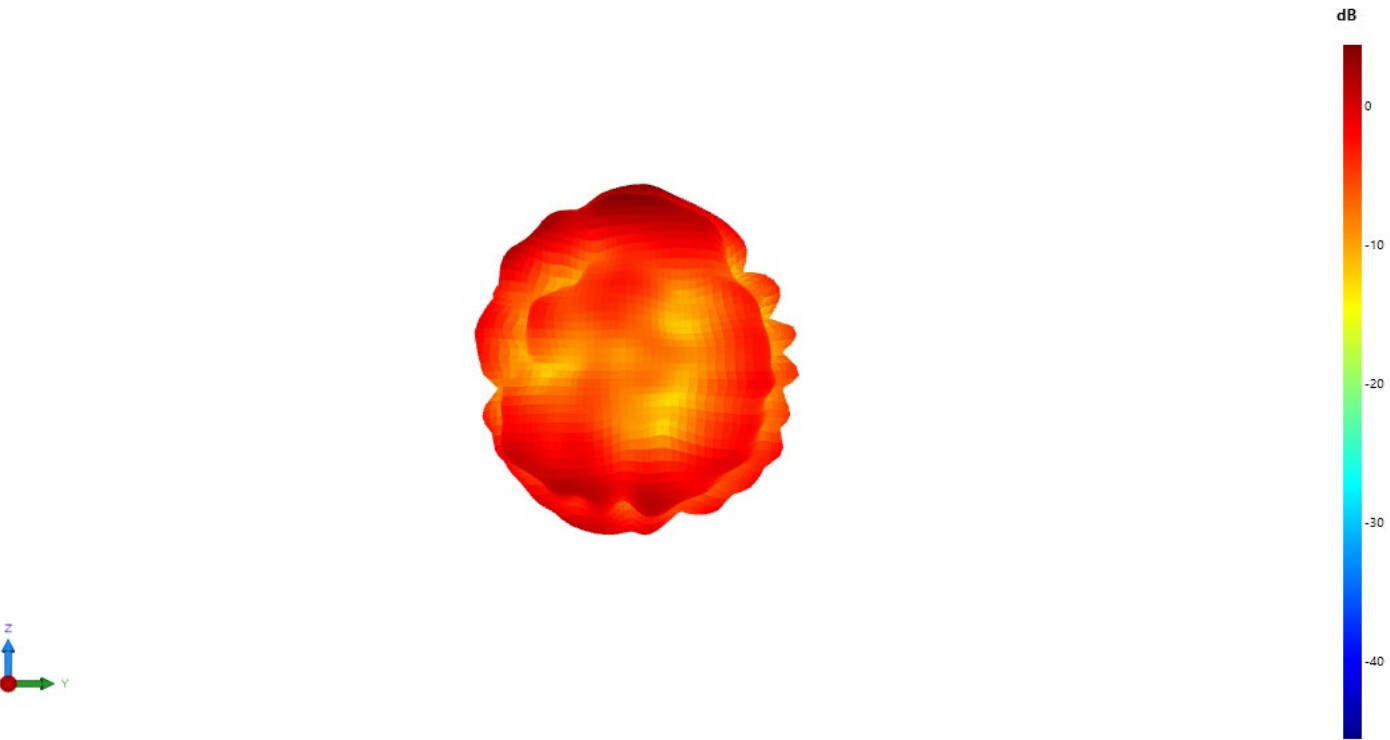


Max Antenna 3D Radiation Pattern 5725-5850 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5725-5850          | 5.92                             |

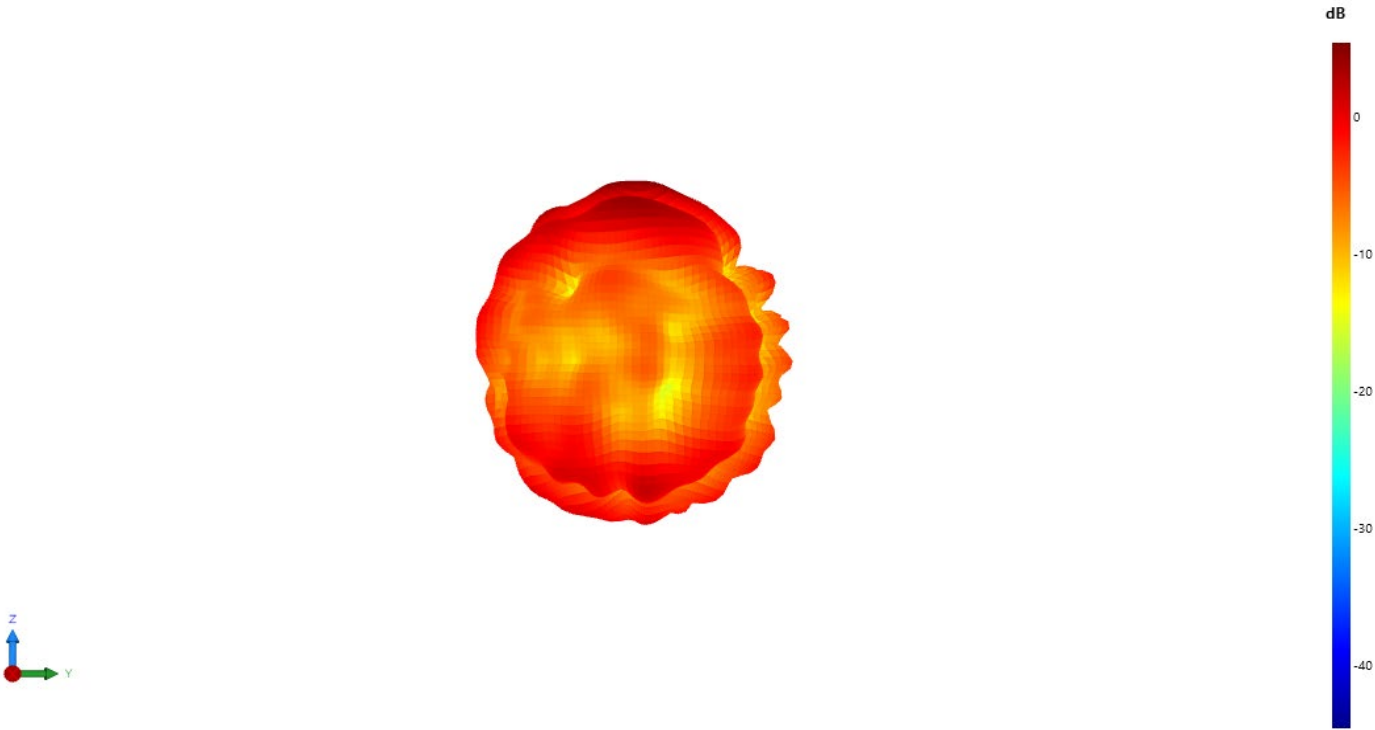

Max Antenna 3D Radiation Pattern 5850-5895 MHz


| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5850-5895          | 5.54                             |

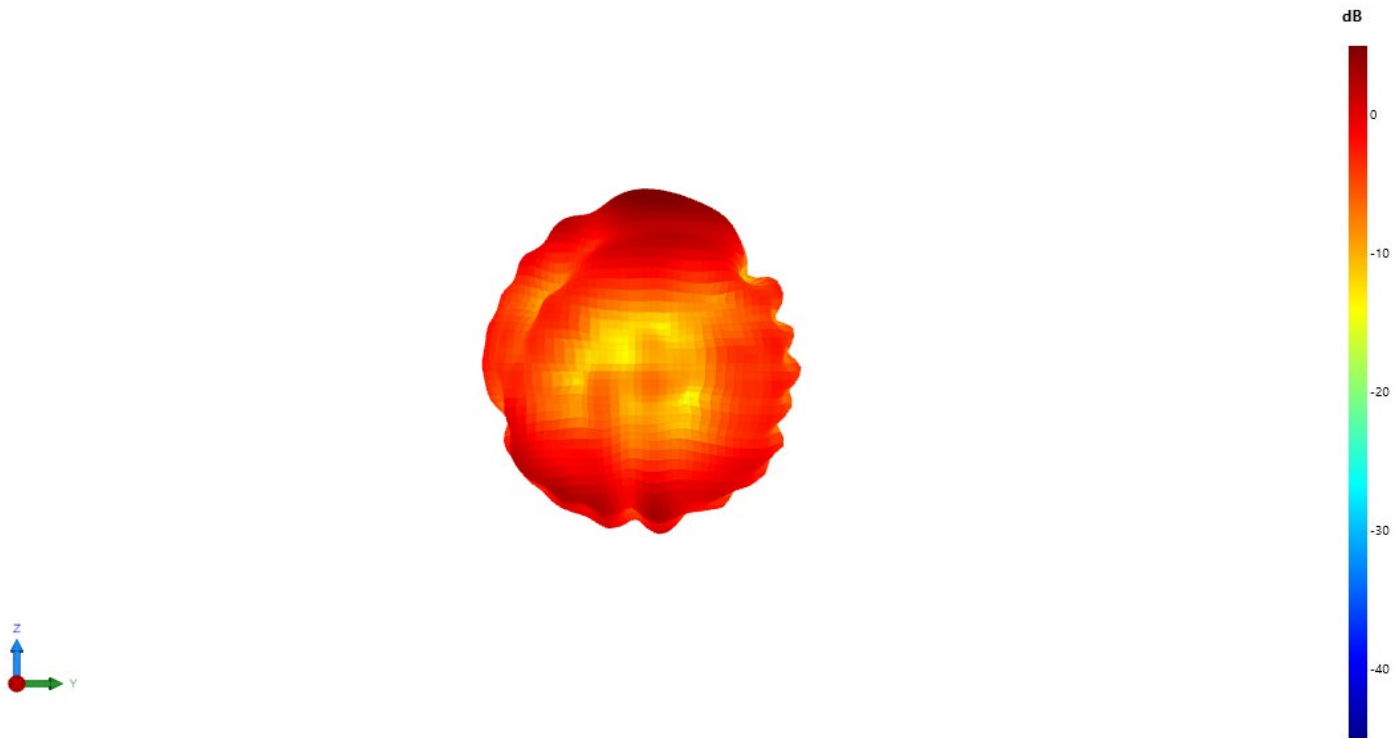




Max Antenna 3D Radiation Pattern 5925-6425 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 5925-6425          | 5.27                             |

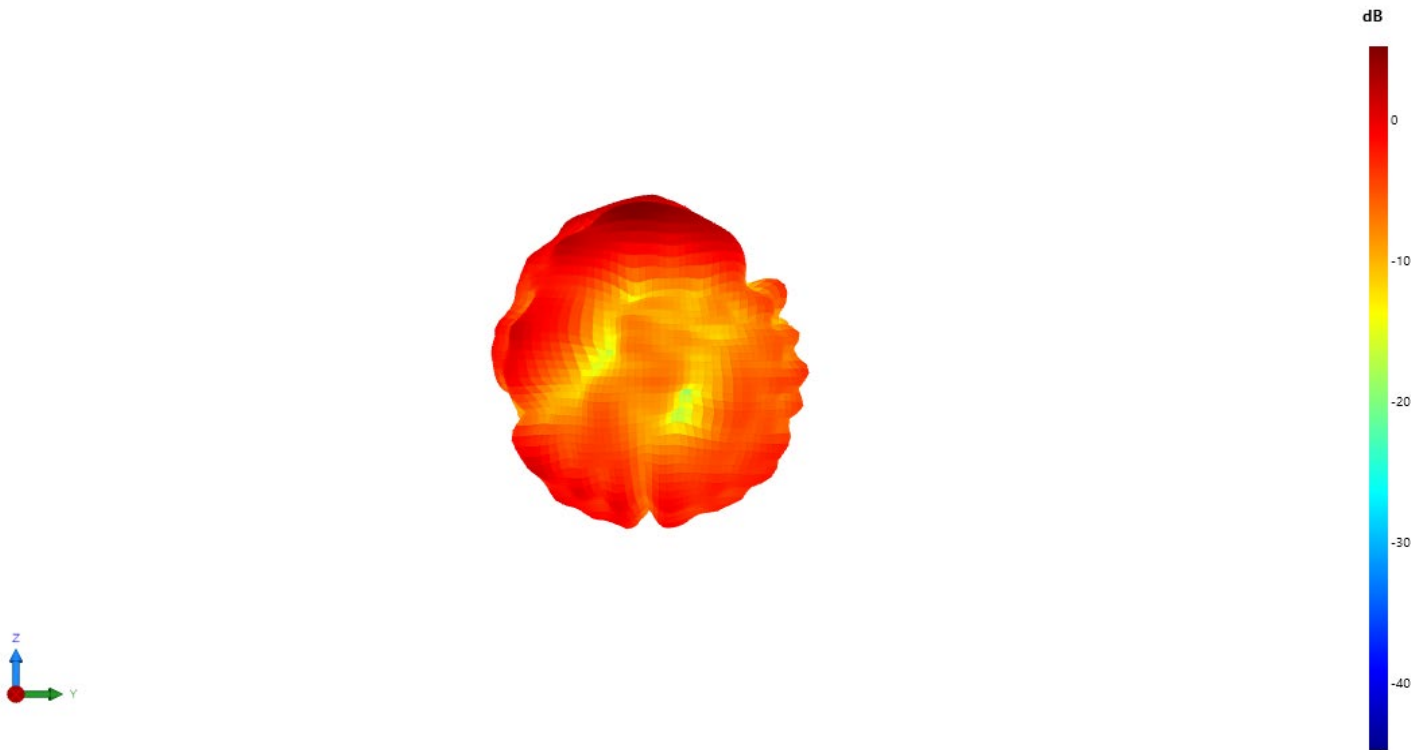


Max Antenna 3D Radiation Pattern 6425-6525 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 6425-6525          | 4.75                             |

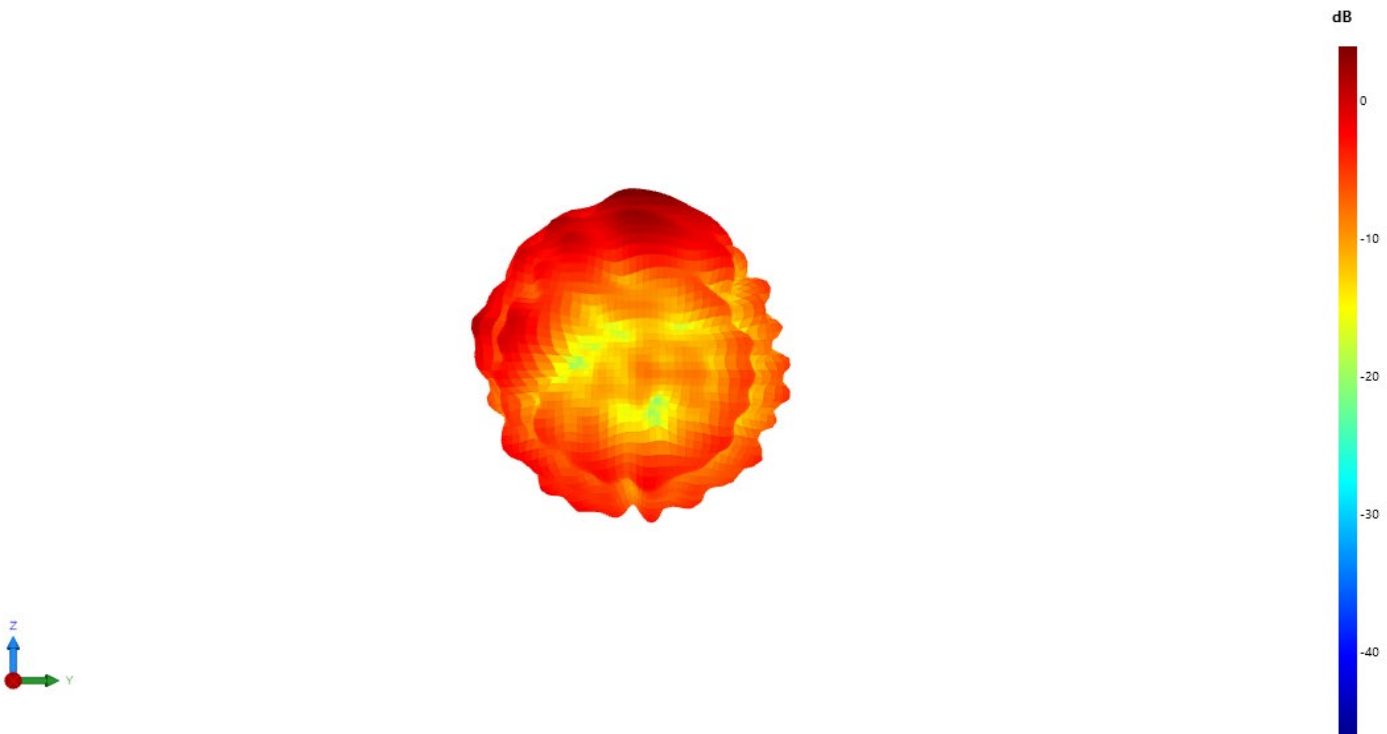


Max Antenna 3D Radiation Pattern 6525-6875 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 6525-6875          | 6.52                             |

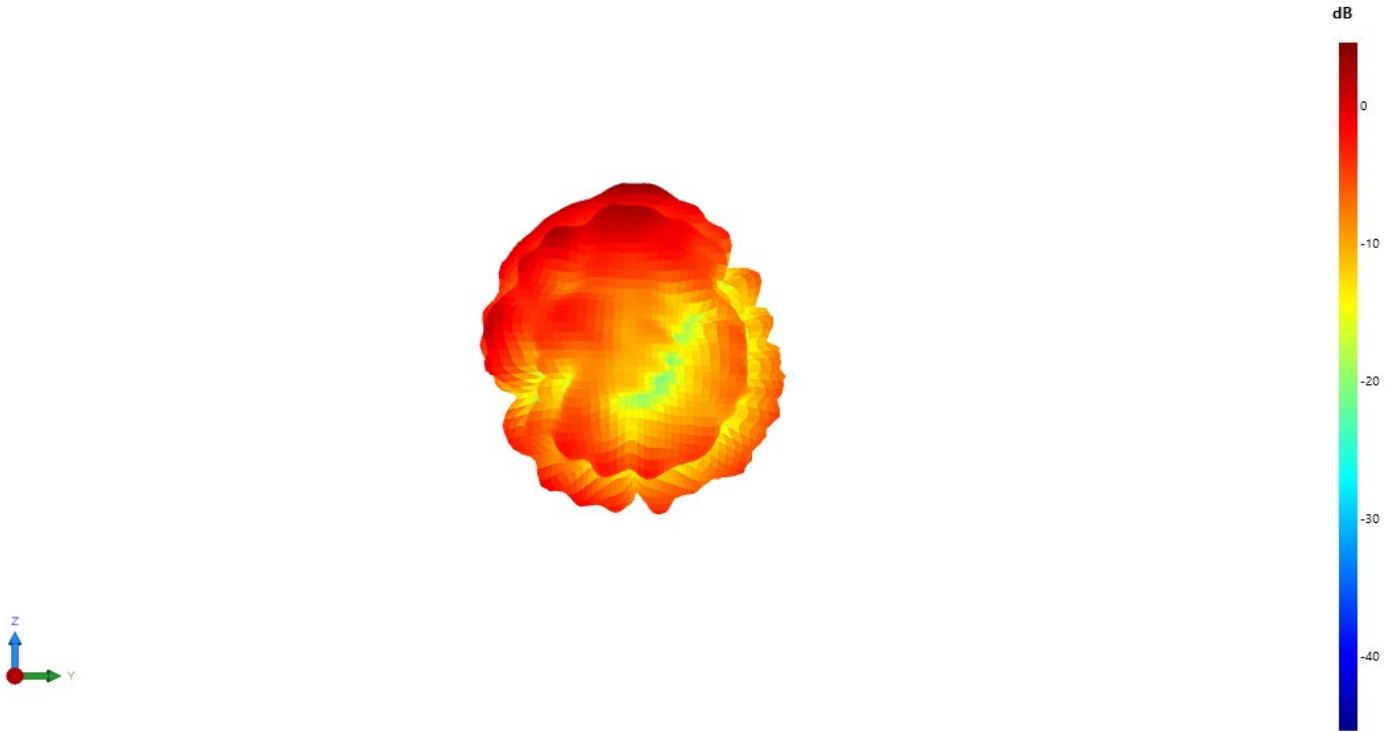

Max Antenna 3D Radiation Pattern 6875-7125 MHz

| Frequency<br>(MHz) | Peak Gain w/ Cable Loss<br>(dBi) |
|--------------------|----------------------------------|
| 6875-7125          | 6.52                             |

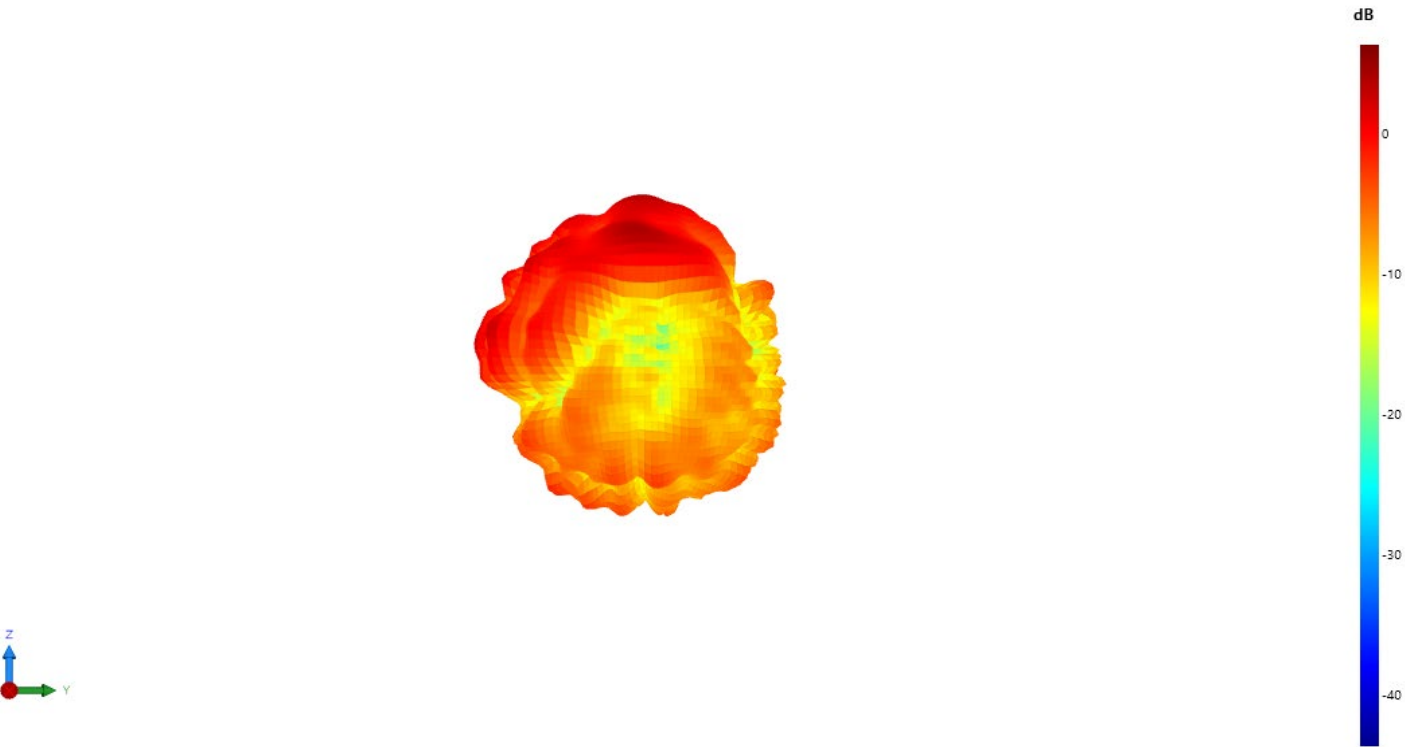

## Record of Revisions

[illegible]