

FCC/ISED - TEST REPORT

Report Number : **68.950.24.0327.01** Date of Issue: **2024-06-28**

Model/HVIN : **CPSS1**

Product Type : Camera

Applicant : GoPro, Inc.

Address : 3025 Clearview Way, San Mateo, CA 94402, USA

Manufacturer : GoPro, Inc.

Address : 3025 Clearview Way, San Mateo, CA 94402, USA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **77**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems Test Configuration.....	10
9	Technical Requirement.....	11
9.1	Conducted Emission.....	11
9.2	Conducted Output Power & EIRP	14
9.3	20 dB Bandwidth and 99% Occupied Bandwidth.....	19
9.4	Carrier Frequency Separation.....	27
9.5	Number of Hopping Frequencies	30
9.6	Dwell Time	33
9.7	Spurious RF Conducted Emissions	41
9.8	Band Edge Testing	51
9.9	Spurious Radiated Emissions for Transmitter.....	62
10	Test Equipment List.....	76
11	System Measurement Uncertainty	77

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou,
Nanshan District, Shenzhen City, 518052, P. R. China

Telephone: 86 755 8828 6998

Fax: 86 755 828 5299

FCC Registration No.: 514049

FCC Designation No.: CN5009

IC Registration No.: 10320A

ISED CAB identifier: CN0077

3 Description of the Equipment Under Test

Product:	Camera
Model no.:	CPSS1
FCC ID:	CNFCPSS1
IC:	10193A-CPSS1
PMN:	CPSS1
HVIN:	CPSS1
Rating:	3.89VDC
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	Internal Integrated Metal Antenna
Antenna Gain:	-1.08dBi max for 2.4GHz
Description of the EUT:	The Equipment Under Test (EUT) is a Camera supports Bluetooth Low Energy / Bluetooth BR+EDR/ Wi-Fi functions

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5, April 2018 Amendment 1, March 2019 + Amendment 2, February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5			
Test Condition		Test Site	Test Result
§15.207 & RSS-Gen 8.8	Conducted emission AC power port	Site 1	Pass
§15.247(b)(1)	Conducted output power	Site 1	Pass
RSS-247 5.4(b)	Conducted output power and Equivalent Isotropic Radiated Power	Site 1	Pass
§15.247(a)(1) & RSS-247 5.1(a) & RSS-Gen 6.7	20dB bandwidth and 99% occupied bandwidth	Site 1	Pass
§15.247(a)(1) & RSS-247 5.1(b)	Carrier channel frequency separation	Site 1	Pass
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Number of hopping frequencies	Site 1	Pass
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Dwell Time - Average Time of Occupancy	Site 1	Pass
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	Pass
§15.247(d) & RSS-247 5.5	Band edge	Site 1	Pass
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	Pass
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Internal Integrated Metal Antenna, which gain is -1.08dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: CNFCPSS1, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

This submittal(s) (test report) is intended for IC: 10193A-CPSS1, complies with RSS-247, RSS-GEN.

The Model CPSS1 supports Bluetooth Low Energy/Bluetooth BR+EDR/Wi-Fi functions, it is powered by a 3.89VDC, 1900mAh rechargeable Lithium Ion Battery or 5VDC supplies by USB type C port for charging battery.

The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHz Wi-Fi, 5180MHz – 5320MHz, 5500MHz – 5700MHz, 5745MHz – 5825MHz for 5GHz Wi-Fi. (This device shall not be capable of transmitting in the band 5600-5650MHz for Canada. This restriction is for the protection of Terminal Doppler Weather Radar (TDWR) operating in this band.)

Note: The report is for BR+EDR only.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2024-03-29

Testing Start Date: 2024-04-01


Testing End Date: 2024-05-06

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:

Tested by:



John Zhi
Project Manager




Joe Gu
Project Engineer



Carry Cai
Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

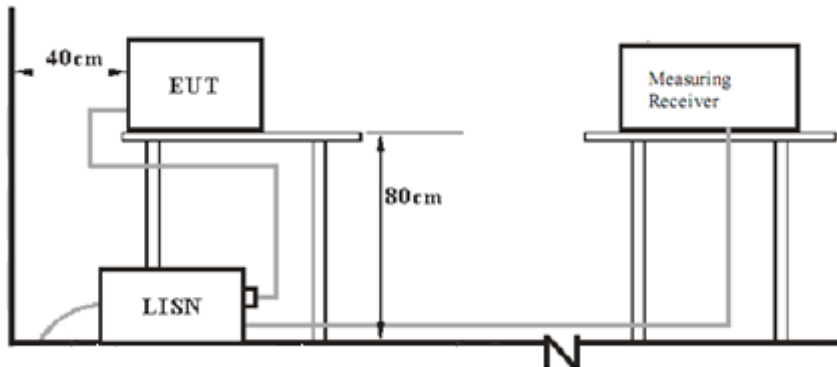


7.2 Radiated test setups


9KHz - 30MHz

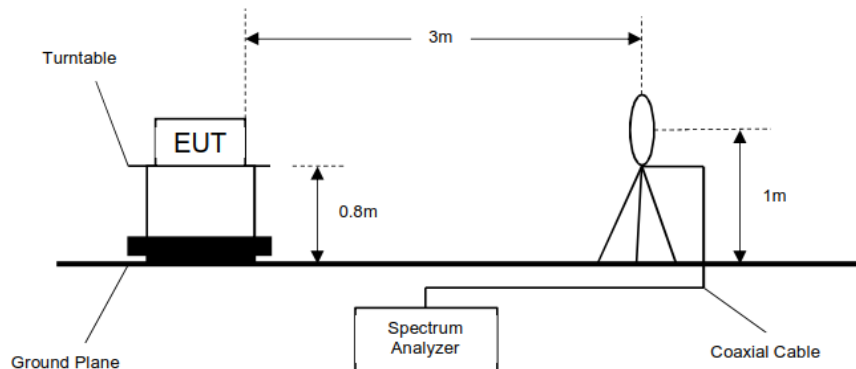


30MHz - 1GHz

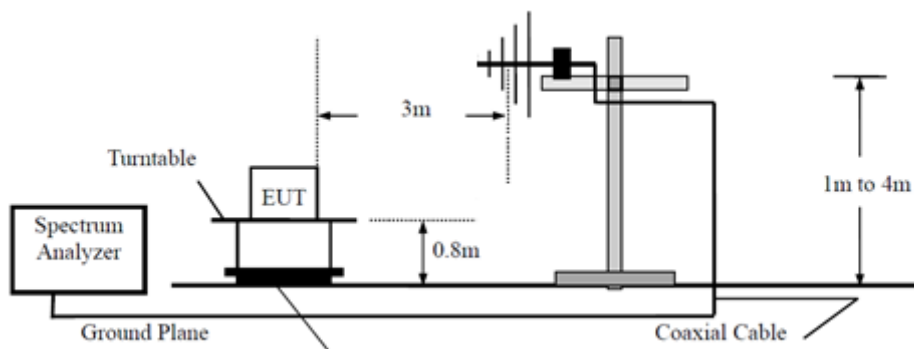

Above 1GHz

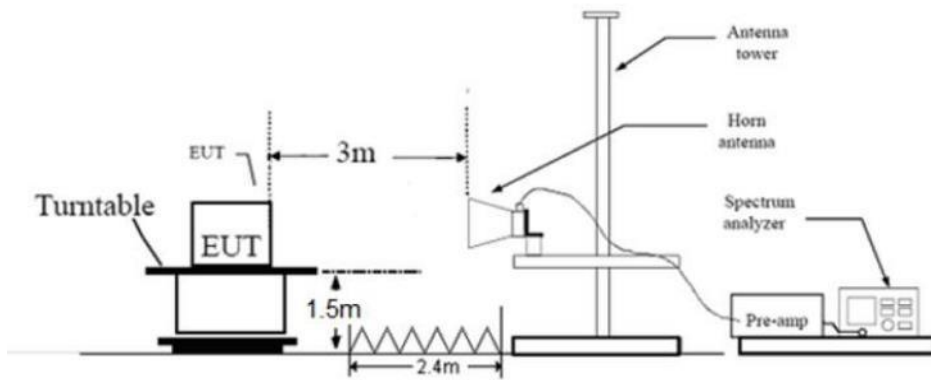

7.3 Conducted RF test setups

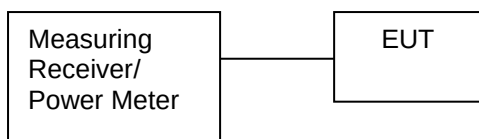

8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
LAPTOP	LENOVO	T460S	---
USB TYPE C CABLE	GOPRO	0.46M (LENGTH)	---
AC ADAPTER	APPLE	A1401	---

Test software information:

Test Software Version	RF TOOL(Ver:0.2.1)
Modulation	Setting TX Power
GFSK	0
$\pi/4$ -DQPSK	0
8-DPSK	0

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Camera
 M/N : CPSS1
 Operating Condition : Charging and transmitting
 Test Specification : Line
 Comment : AC 120V/60Hz(External adapter)

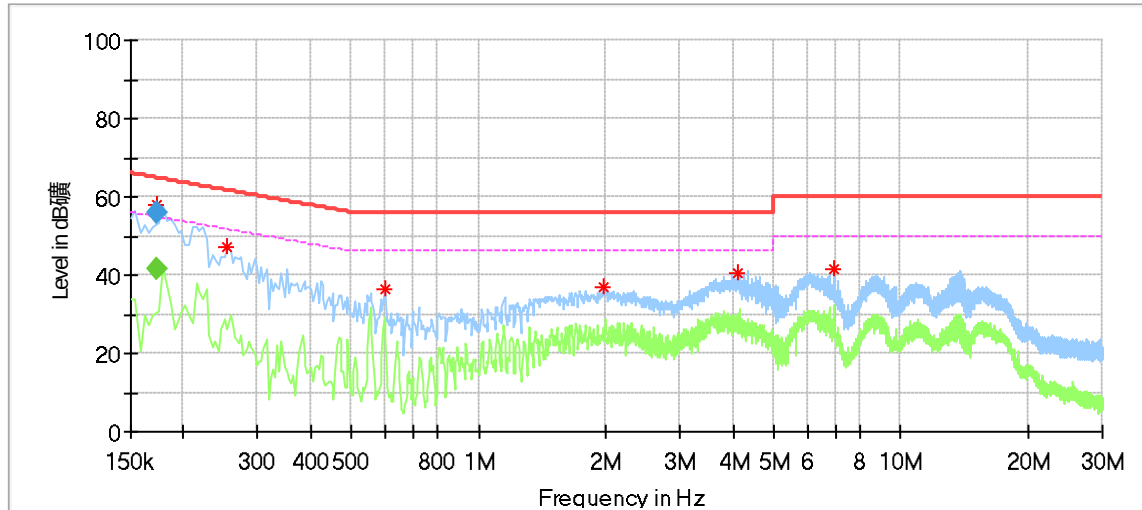

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.173500	57.91	---	64.58	6.67	L1	9.54
0.254000	46.99	---	61.63	14.64	L1	9.56
0.598000	36.43	---	56.00	19.57	L1	9.60
1.970000	36.71	---	56.00	19.29	L1	9.62
4.122000	40.28	---	56.00	15.72	L1	9.70
6.918000	41.49	---	60.00	18.51	L1	9.83

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.173500	---	41.79	54.79	13.01	L1	9.54
0.173500	55.83	---	64.79	8.96	L1	9.54

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Camera
 M/N : CPSS1
 Operating Condition : Charging and transmitting
 Test Specification : Neutral
 Comment : AC 120V/60Hz(External adapter)

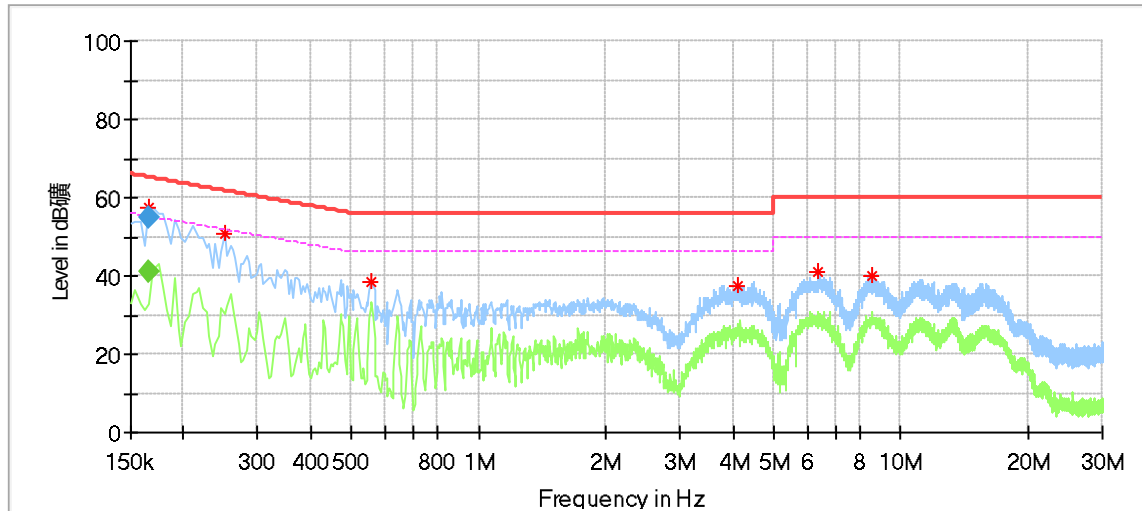

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.165500	57.60	---	64.96	7.36	N	9.57
0.250000	50.75	---	61.76	11.00	N	9.59
0.554000	38.62	---	56.00	17.38	N	9.63
4.110000	37.31	---	56.00	18.69	N	9.73
6.370000	40.87	---	60.00	19.13	N	9.83
8.538000	39.93	---	60.00	20.07	N	9.92

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.165500	---	41.17	55.18	14.01	N	9.57
0.165500	54.92	---	65.18	10.26	N	9.57

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (1) & RSS-247 5.4(b), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤0.125	≤21

According to & RSS-247 5.4(b), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Remark: EIRP=Conducted output power + Antenna Gain

Conducted Output Power & EIRP

Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Low channel 2402MHz	6.65	-1.08	5.57	Pass
Middle channel 2441MHz	6.69	-1.08	5.61	Pass
High channel 2480MHz	6.53	-1.08	5.45	Pass

Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result


Frequency MHz	Conducted Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Low channel 2402MHz	3.37	-1.08	2.29	Pass
Middle channel 2441MHz	3.66	-1.08	2.58	Pass
High channel 2480MHz	3.85	-1.08	2.77	Pass

Bluetooth Mode 8DPSK modulation Test Result


Frequency MHz	Conducted Output Power dBm	Antenna Gain dBi	EIRP dBm	Result
Low channel 2402MHz	3.84	-1.08	2.76	Pass
Middle channel 2441MHz	4.12	-1.08	3.04	Pass
High channel 2480MHz	4.31	-1.08	3.23	Pass




GFSK_DH5_LCH_2402MHz_Ant1_NTNV

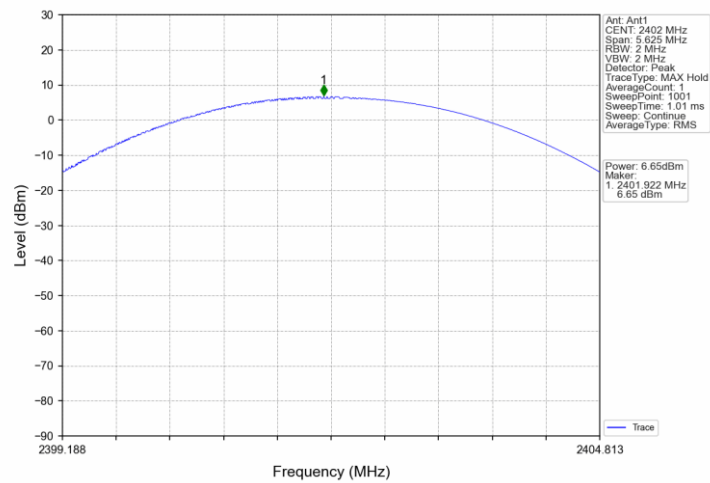


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

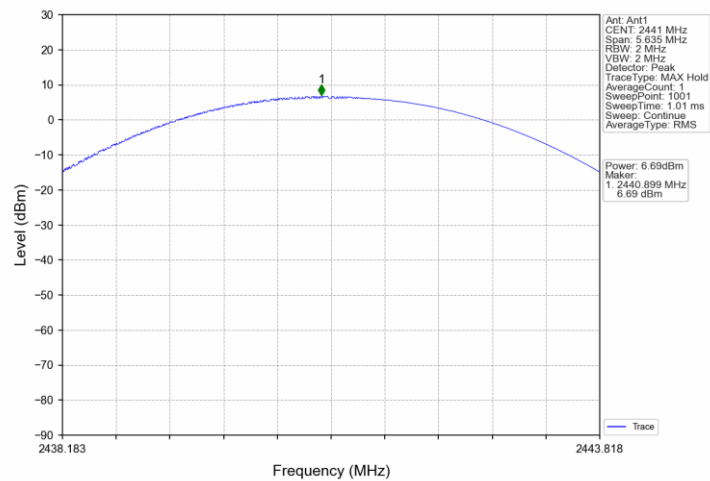


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

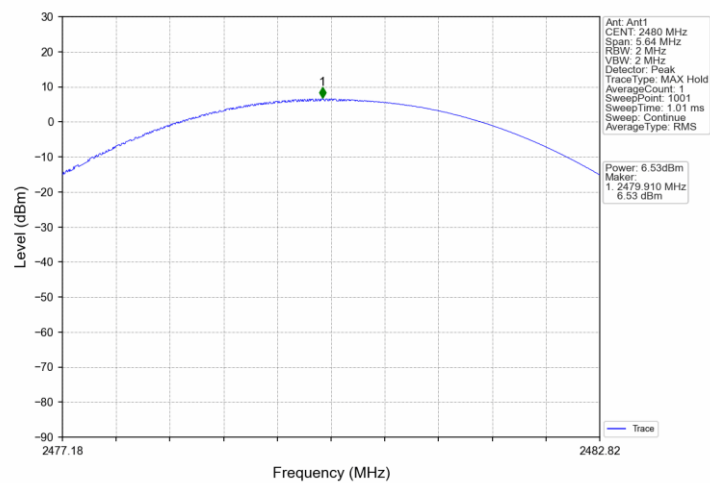


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

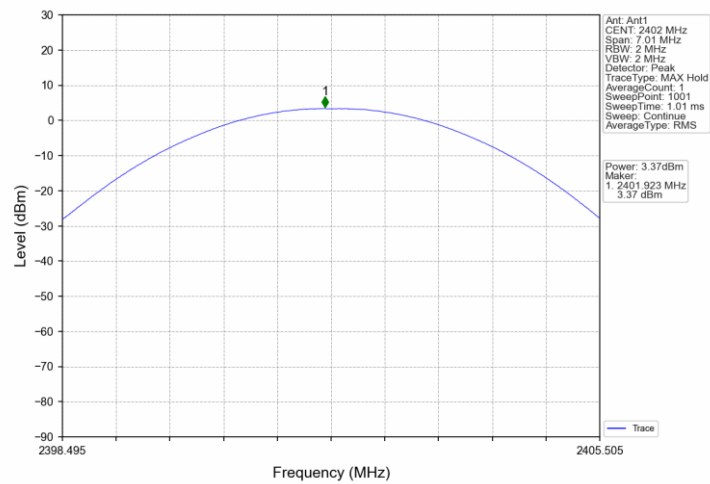


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

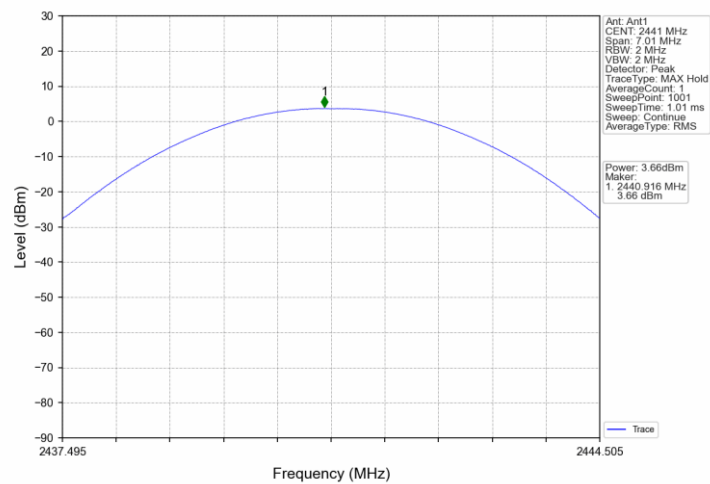


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

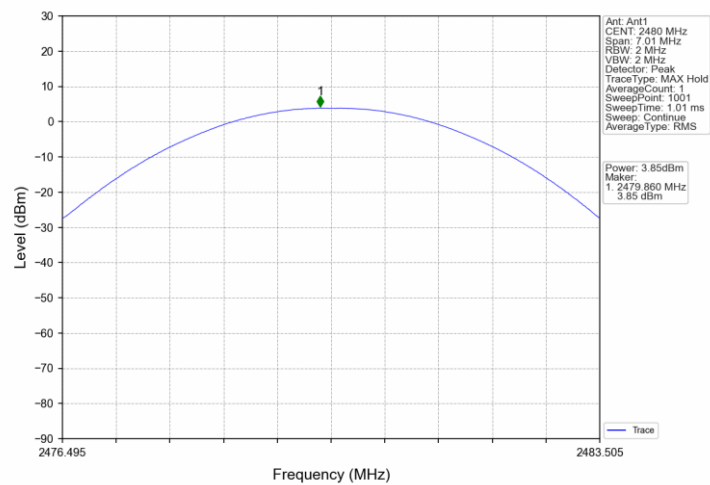


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

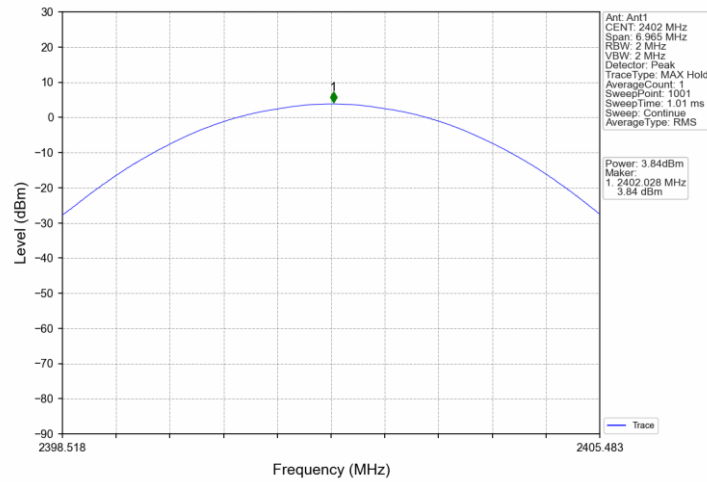

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

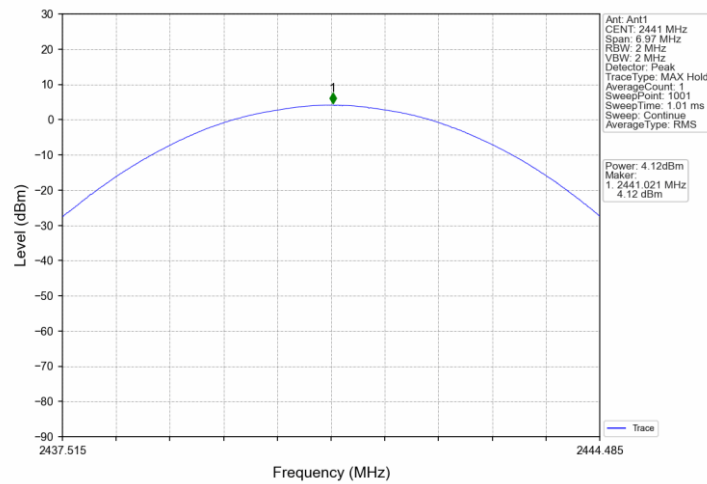

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

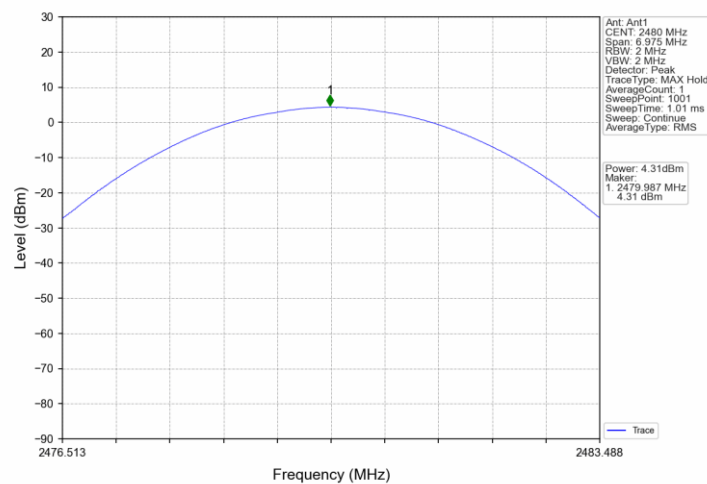

9.3 20 dB Bandwidth and 99% Occupied Bandwidth

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW = 1% to 5% of the OBW, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB/99% OBW from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
5. Repeat above procedures until all frequencies measured were complete.

Limit




Limit [kHz]

N/A


20 dB bandwidth and 99% Occupied Bandwidth

Test result


TestMode	Frequency MHz	20 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz	Result
GFSK	2402	1.025	0.890	--	Pass
GFSK	2441	1.026	0.892	--	Pass
GFSK	2480	1.025	0.890	--	Pass
$\pi/4$ -DQPSK	2402	1.332	1.187	--	Pass
$\pi/4$ -DQPSK	2441	1.332	1.187	--	Pass
$\pi/4$ -DQPSK	2480	1.331	1.187	--	Pass
8DPSK	2402	1.299	1.180	--	Pass
8DPSK	2441	1.299	1.181	--	Pass
8DPSK	2480	1.299	1.181	--	Pass

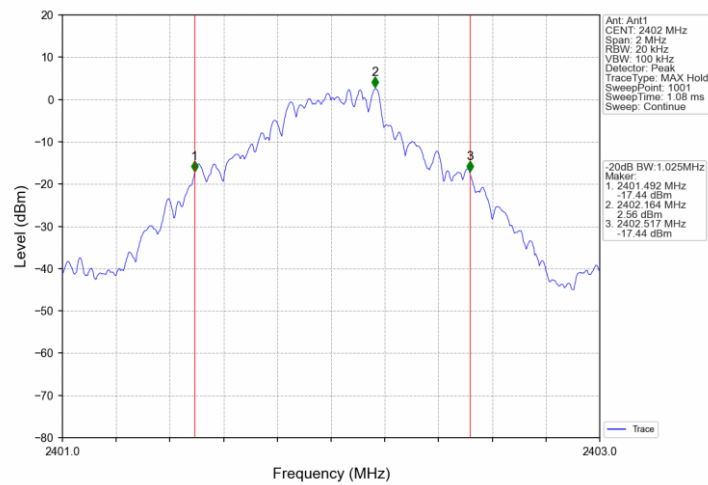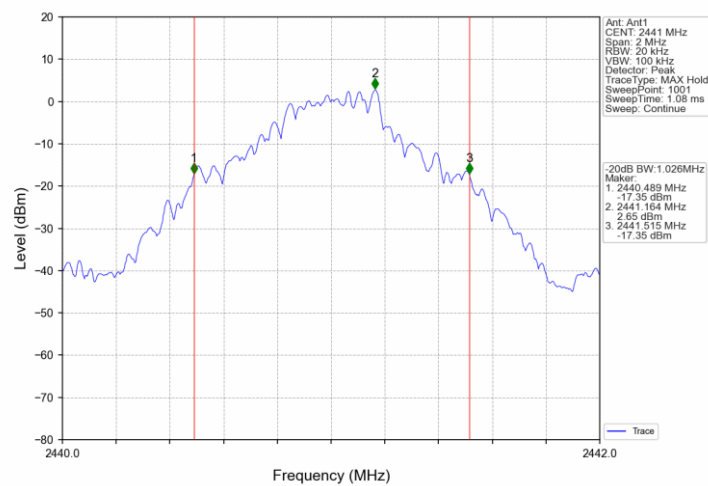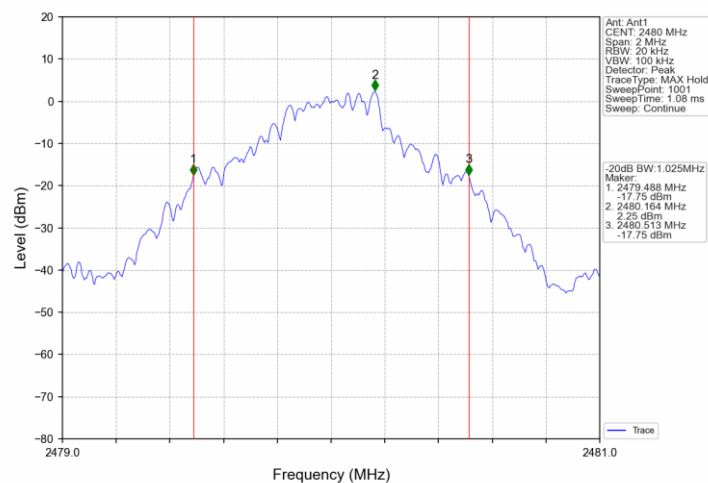20 dB Bandwidth**GFSK_DH5_LCH_2402MHz_Ant1_NTNV****GFSK_DH5_MCH_2441MHz_Ant1_NTNV****GFSK_DH5_HCH_2480MHz_Ant1_NTNV**


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

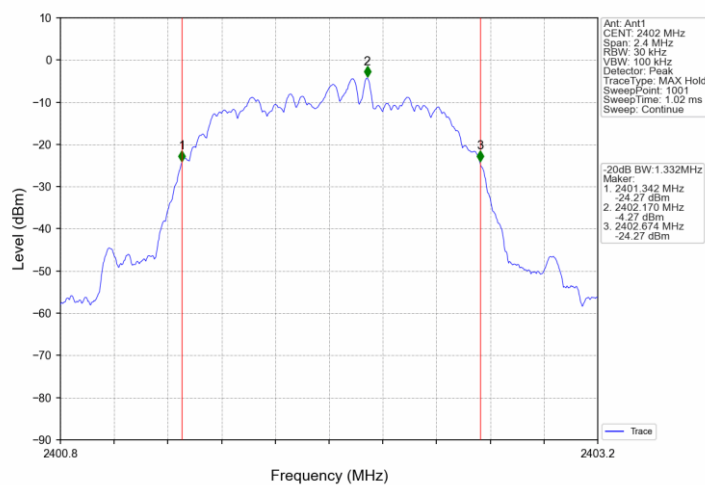


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

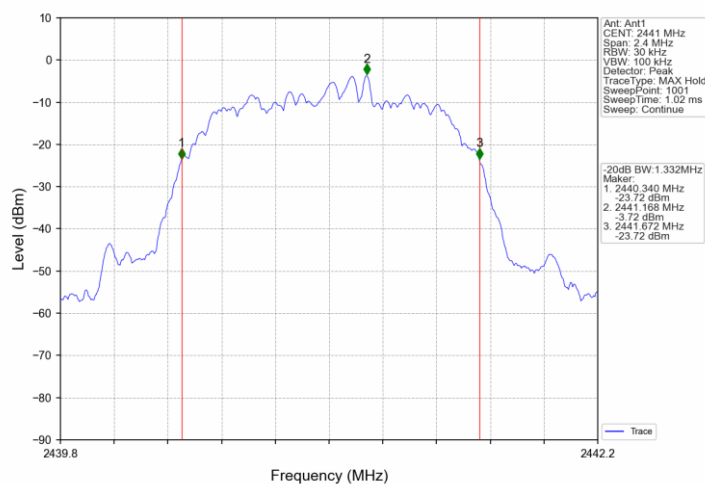


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

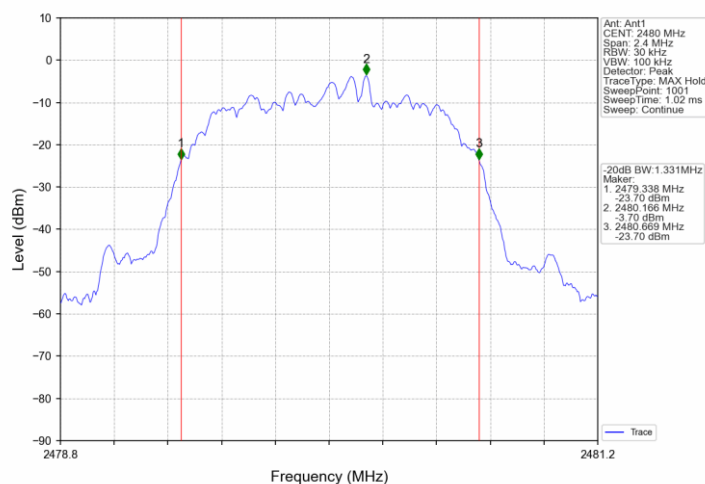


8DPSK 3DH5 LCH 2402MHz Ant1 NTNV

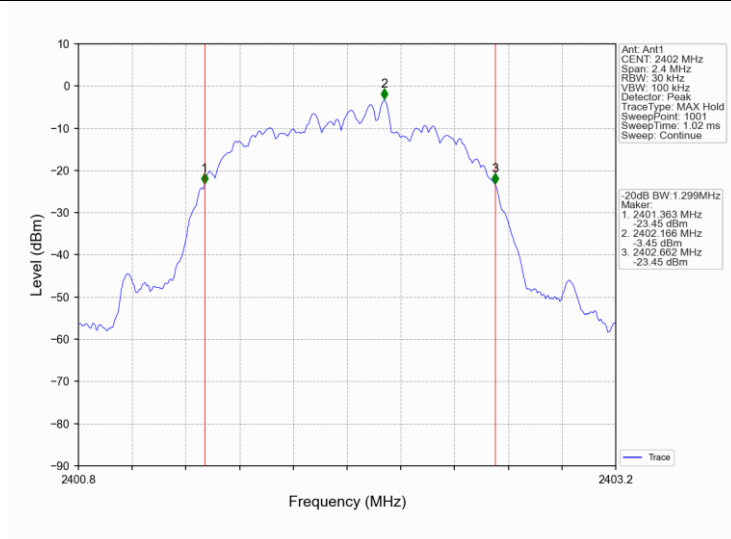

8DPSK 3DH5 MCH 2441MHz Ant1 NTNV

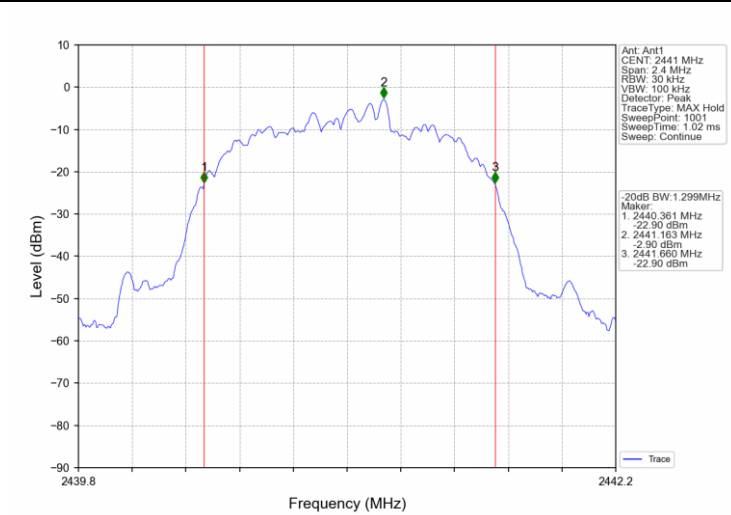


8DPSK 3DH5 HCH 2480MHz Ant1 NTNV

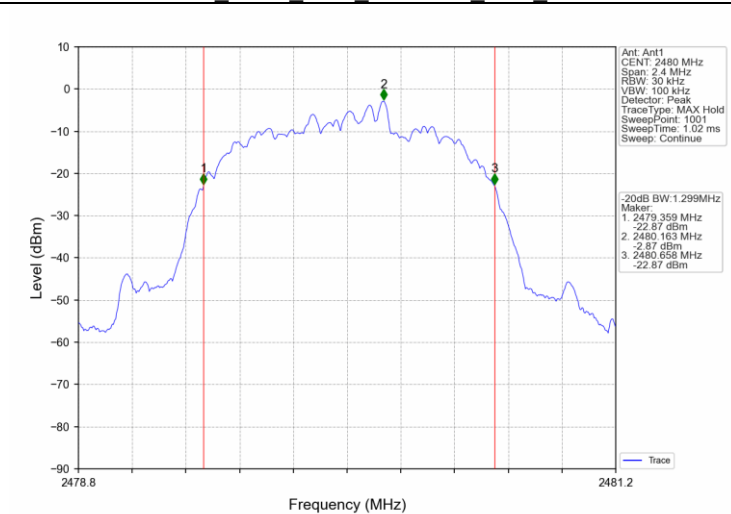


99% Occupied Bandwidth


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

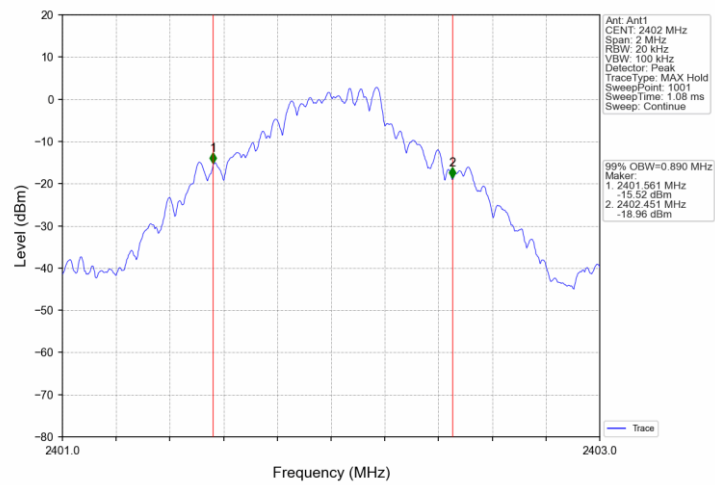


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

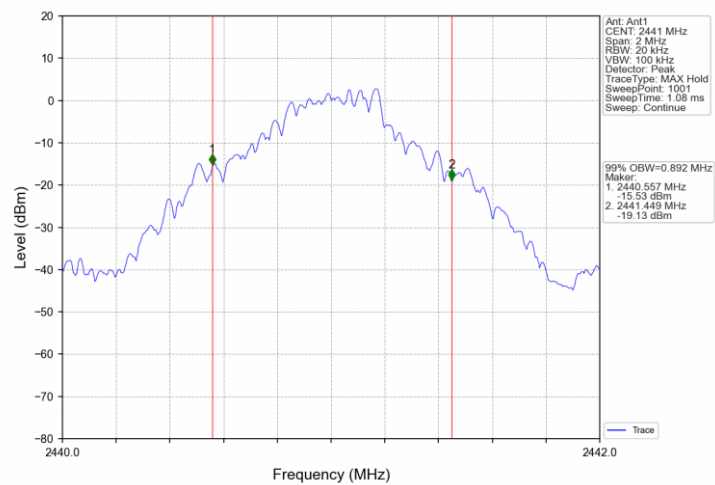


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

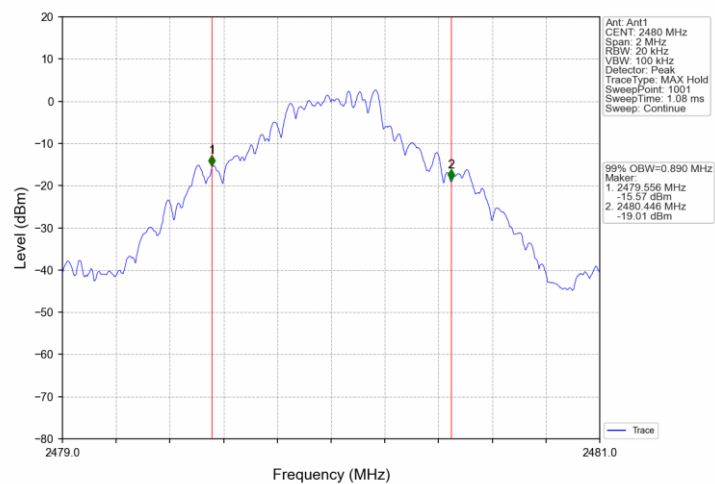


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

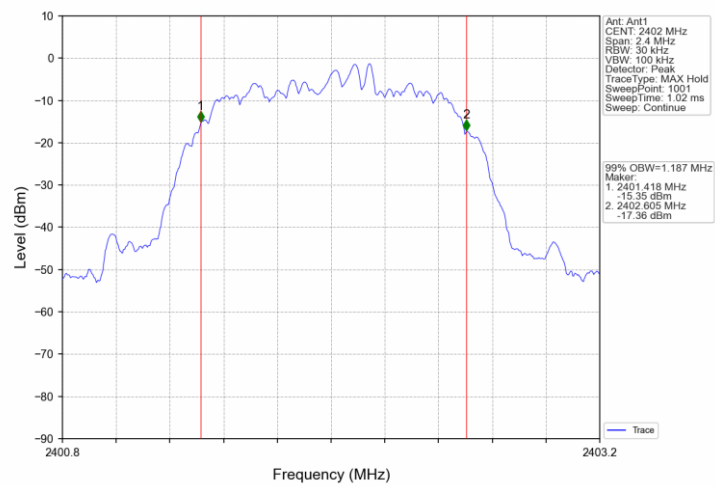


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

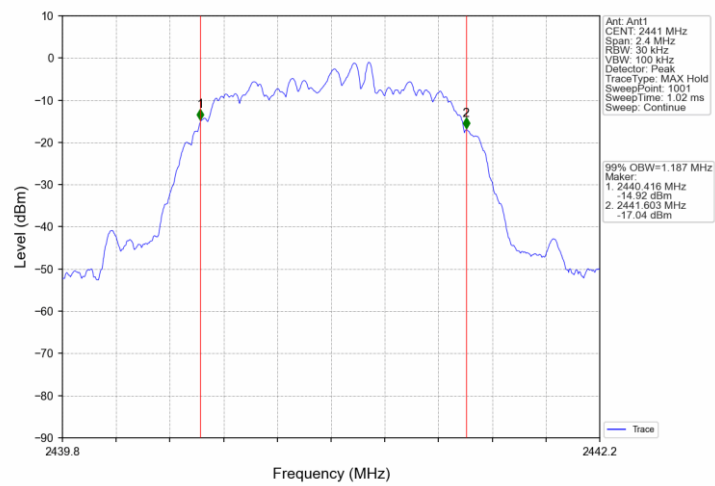


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

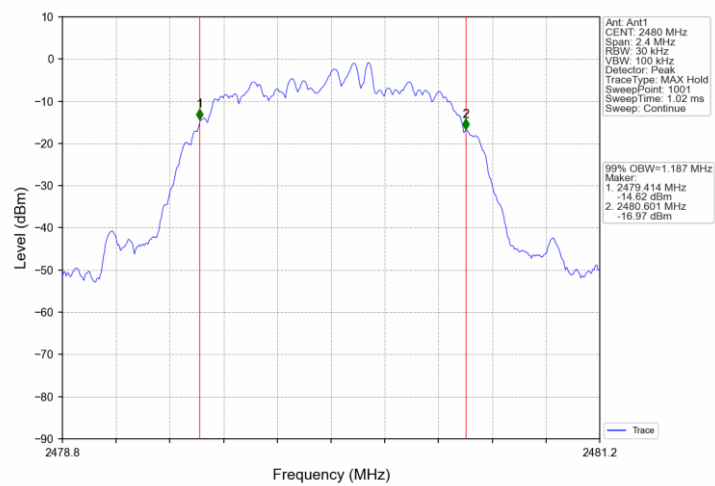


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

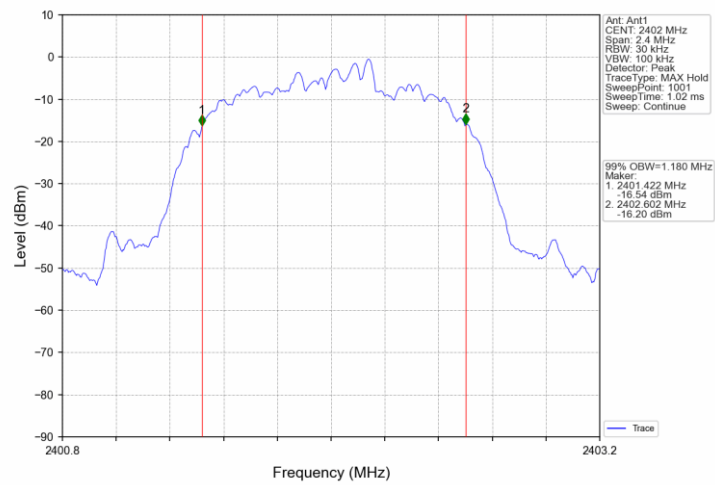

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

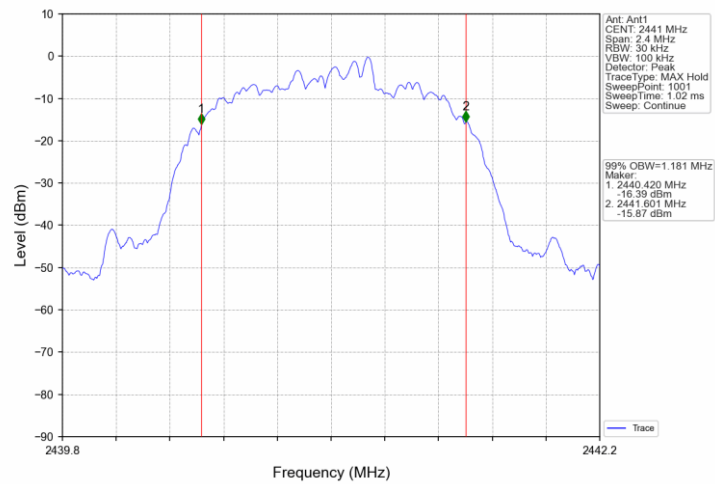

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

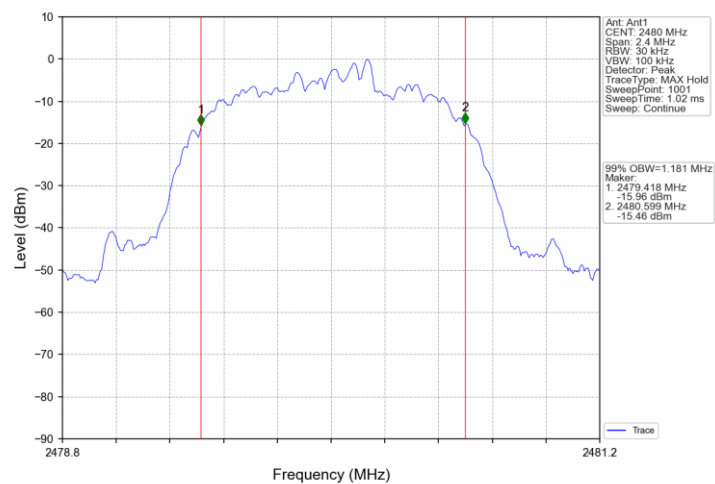

9.4 Carrier Frequency Separation

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. VBW $\geq$ RBW, Sweep = auto, Detector function = peak.
4. By using the Max-Hold function record the separation of two adjacent channels.
5. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function. Record the results.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Limit	Limit kHz		
	$\geq 25\text{kHz}$ or 2/3 of the 20 dB bandwidth which is greater		
	Modulation	Frequency MHz	2/3 of 20 dB Bandwidth kHz
	GFSK	2441	684
	$\pi/4$ -DQPSK	2441	888
	8DPSK	2441	866

Carrier Frequency Separation


Test result: The measurement was performed with the typical configuration (normal hopping status).


Modulation	Frequency MHz	Carrier Frequency Separation MHz	Result
GFSK	2441	0.998	Pass
$\pi/4$ -DQPSK	2441	0.986	Pass
8DPSK	2441	0.994	Pass

GFSK_DH5_HOPP_Ant1_NTNV

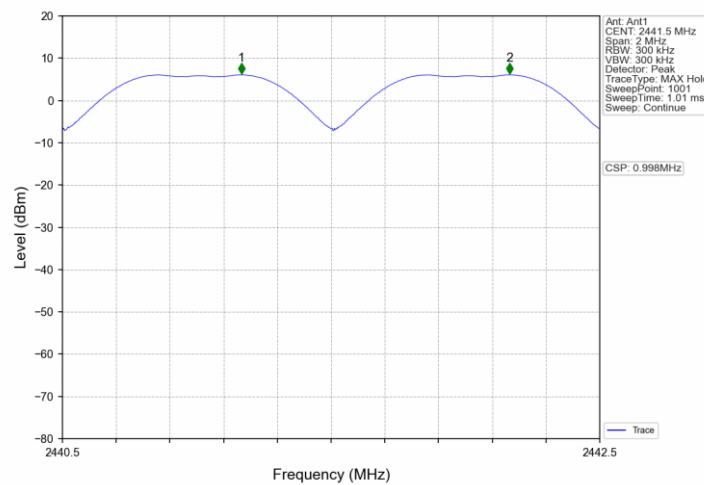

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

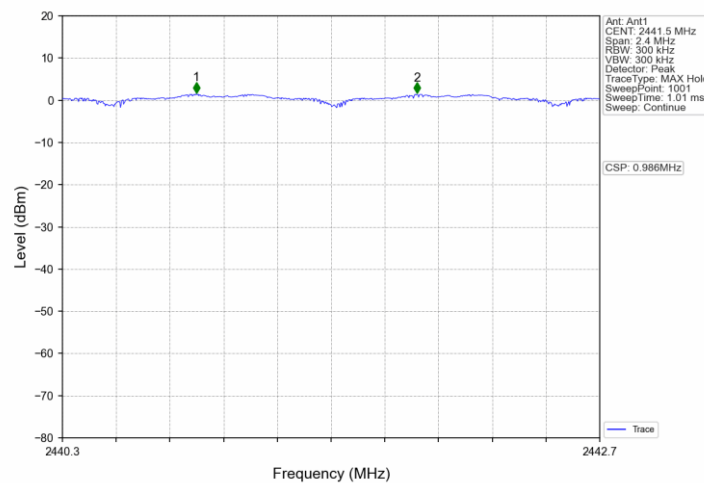

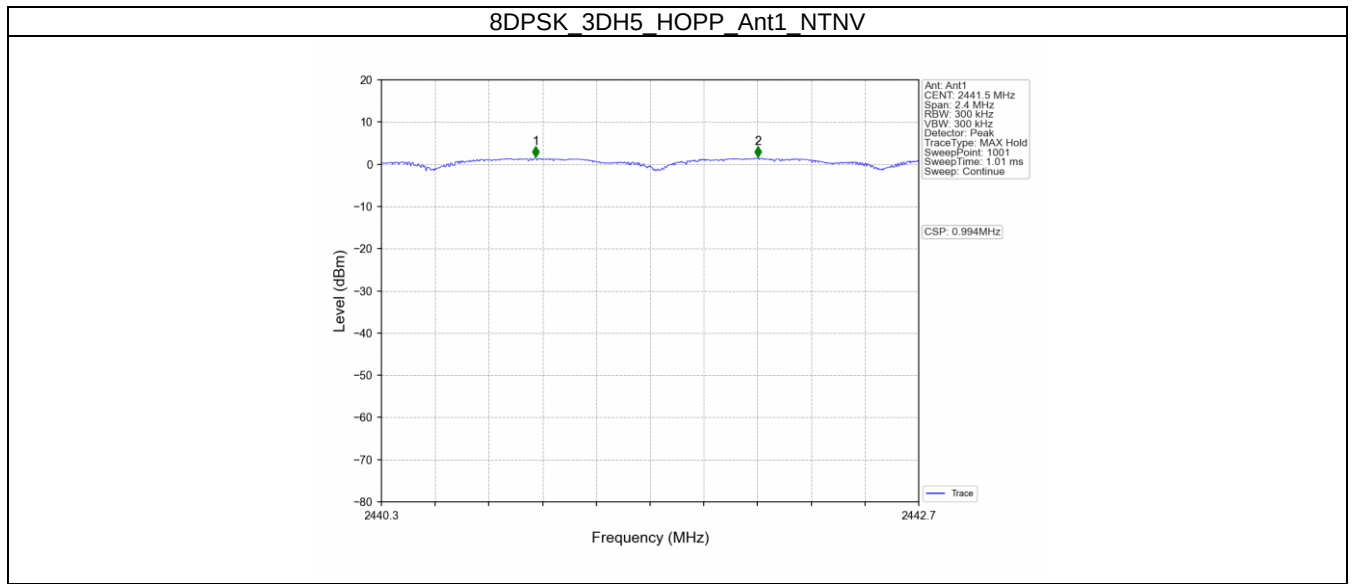

9.5 Number of Hopping Frequencies

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation, RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace=Max hold.
4. Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

Limit

Limit
number


 ≥ 15




Number of Hopping Frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

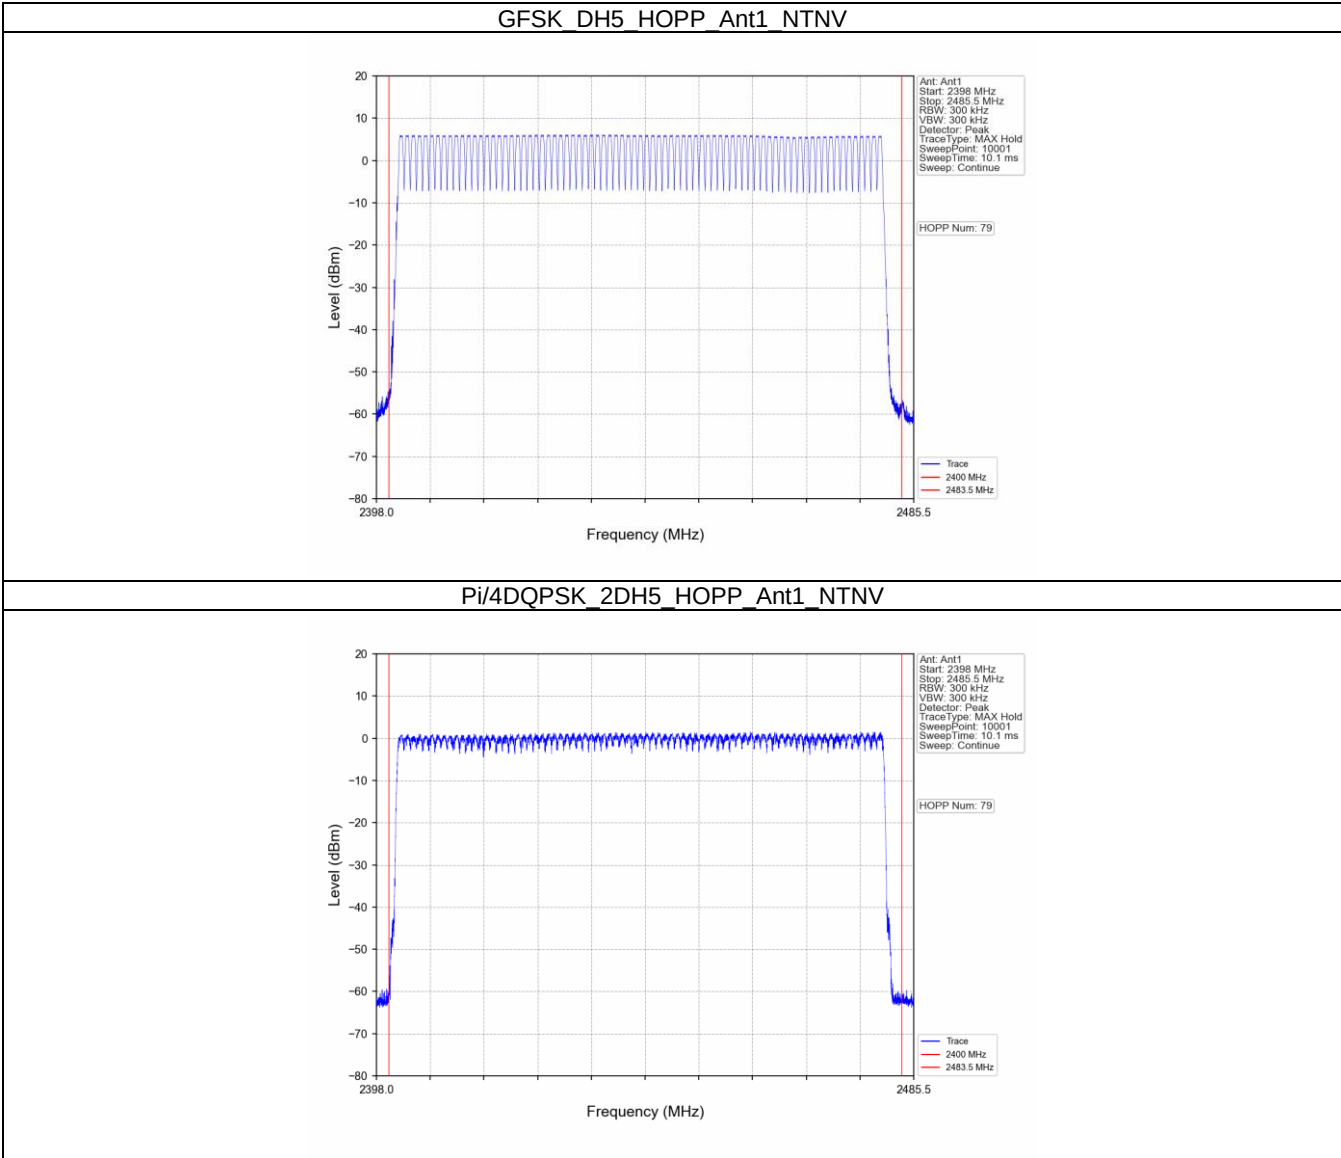

8DPSK_3DH5_HOPP_Ant1_NTNV

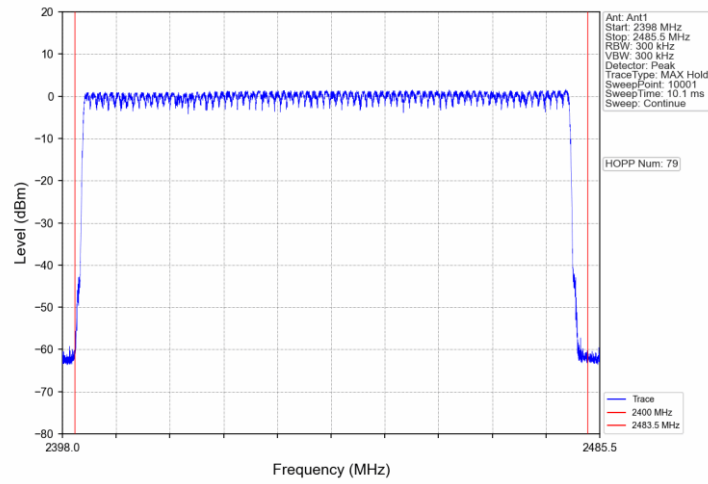

9.6 Dwell Time

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Span: Zero span, centered on a hopping channel.
4. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
5. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
6. Detector function: Peak.
7. Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time


The maximum dwell time shall be 0.4 s.

The duration for dwell time calculation: $0.4 \text{ [s]} \times \text{hopping number} = 0.4 \text{ [s]} \times 79 \text{ [ch]} = 31.6 \text{ [s]}$


The Dwell Time = Burst Width * Total Hops.

Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.396	31.600	321	127.116	<=400	Pass
			DH3	1.654	31.600	165	272.910	<=400	Pass
			DH5	2.900	31.600	100	290.000	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.402	31.600	319	128.238	<=400	Pass
			2DH3	1.654	31.600	158	261.332	<=400	Pass
			2DH5	2.902	31.600	98	284.396	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.402	31.600	320	128.640	<=400	Pass
			3DH3	1.652	31.600	159	262.668	<=400	Pass
			3DH5	2.906	31.600	105	305.130	<=400	Pass


GFSK DH1 HOPP Ant1 NTNv

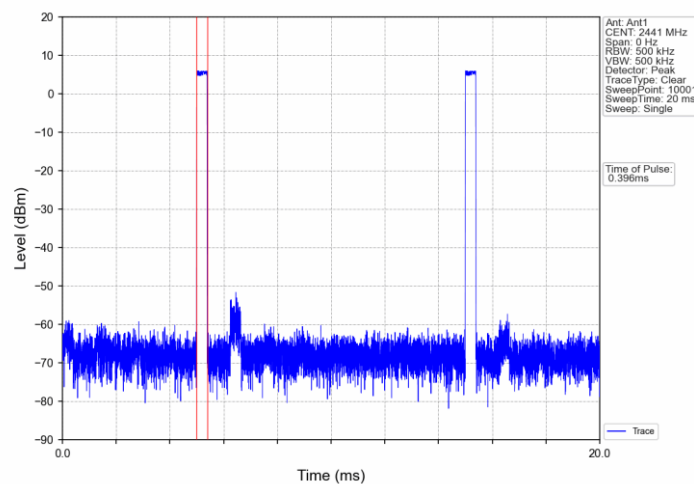


GFSK DH1 HOPP Ant1 NTNv

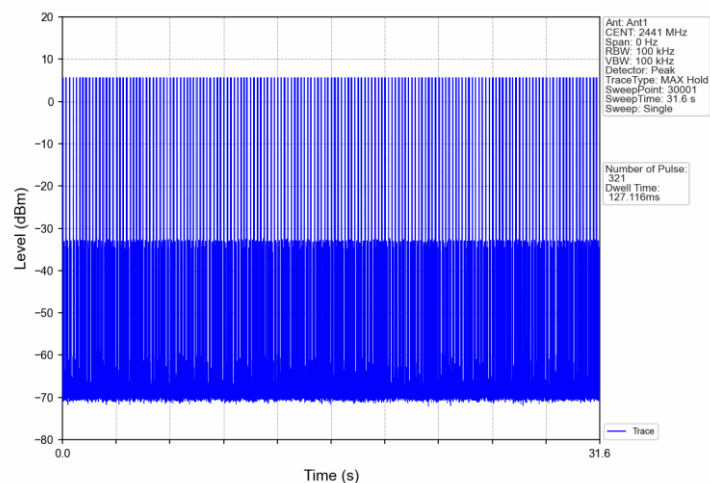


GFSK_DH3_HOPP_Ant1_NTNV

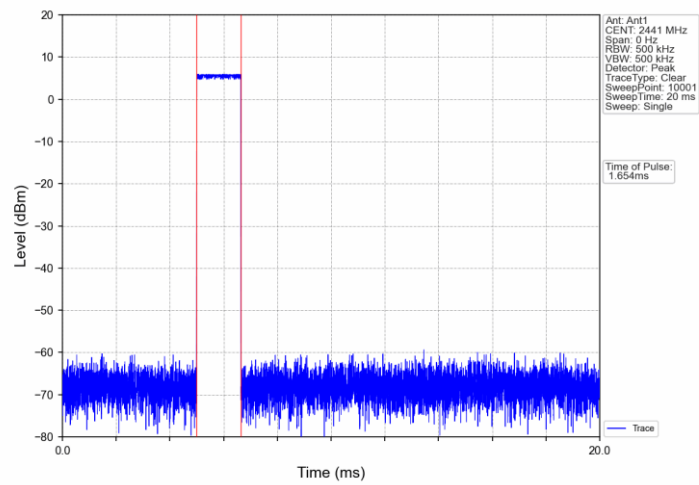


GFSK_DH3_HOPP_Ant1_NTNV

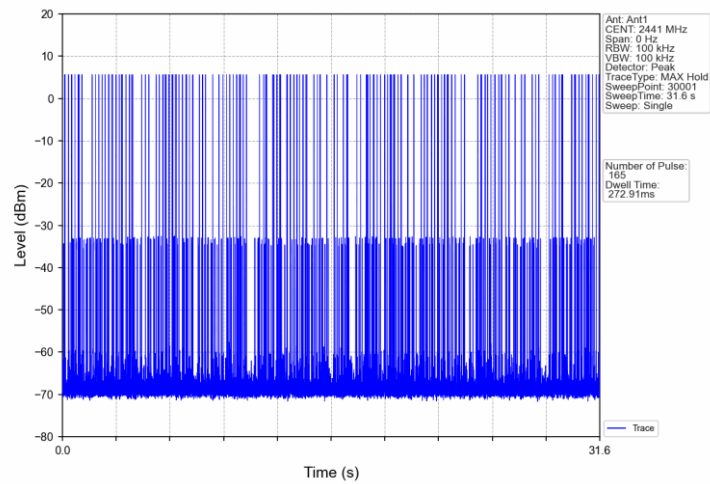


GFSK_DH5_HOPP_Ant1_NTNV

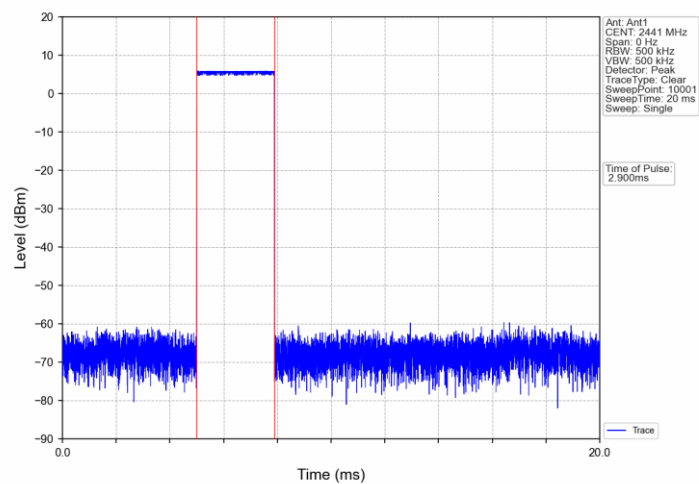


GFSK_DH5_HOPP_Ant1_NTNV

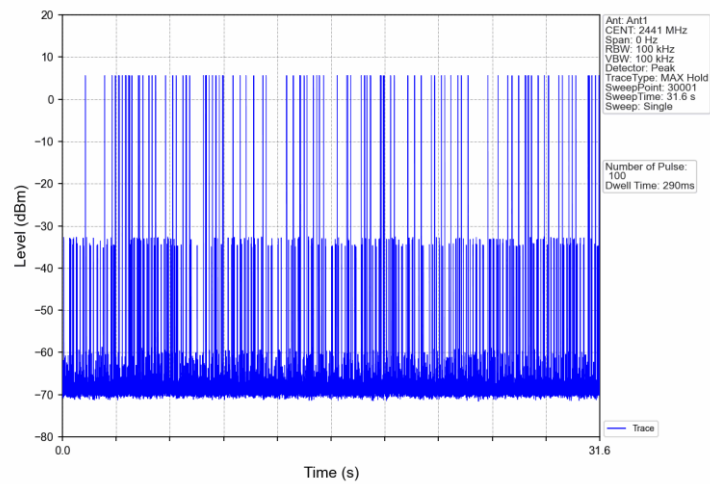


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

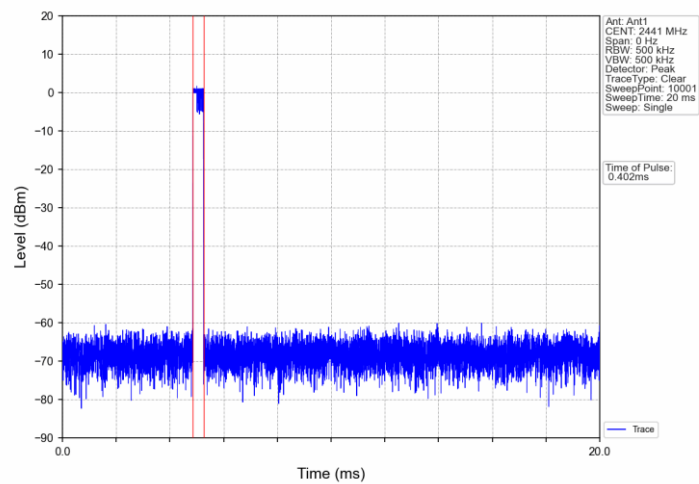


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

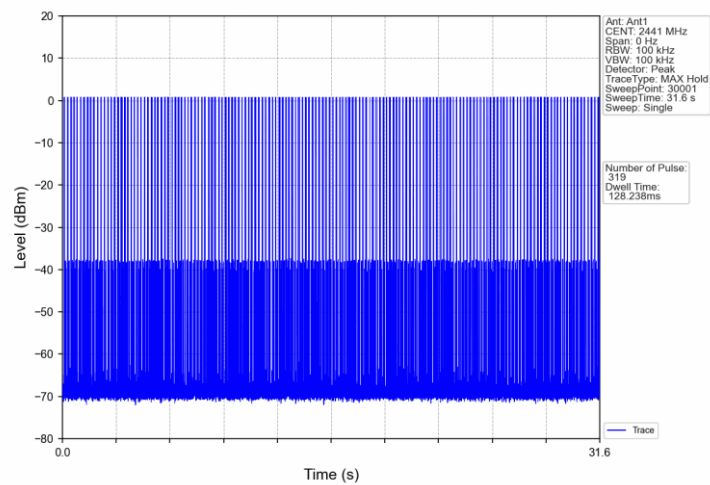


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

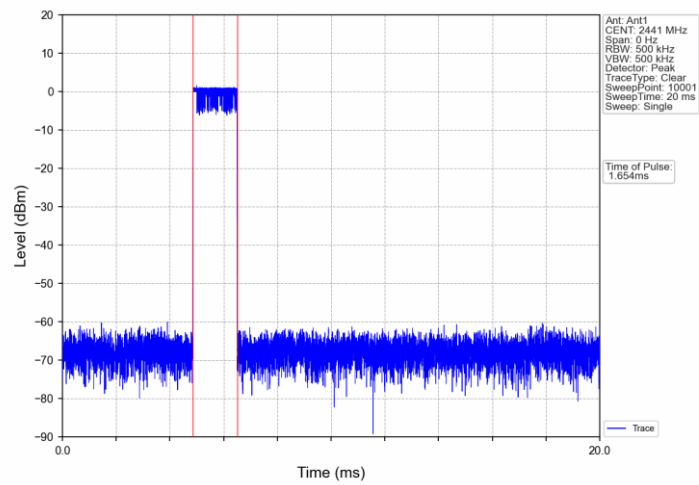


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

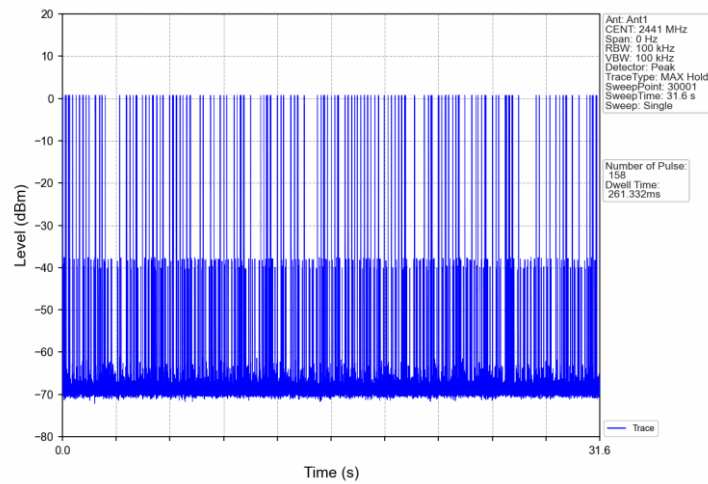


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

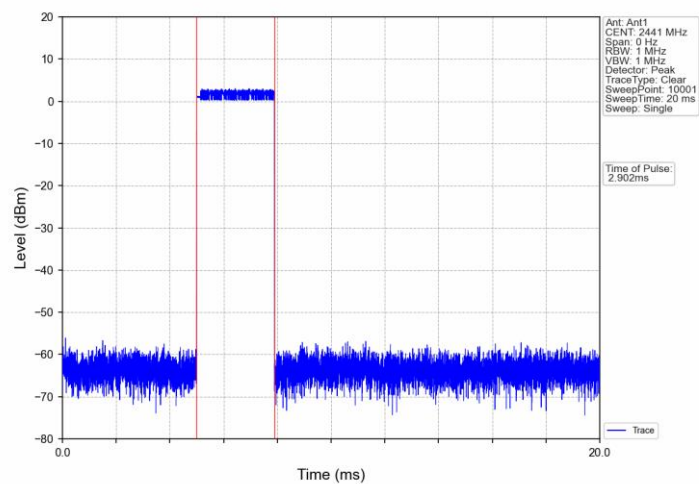

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

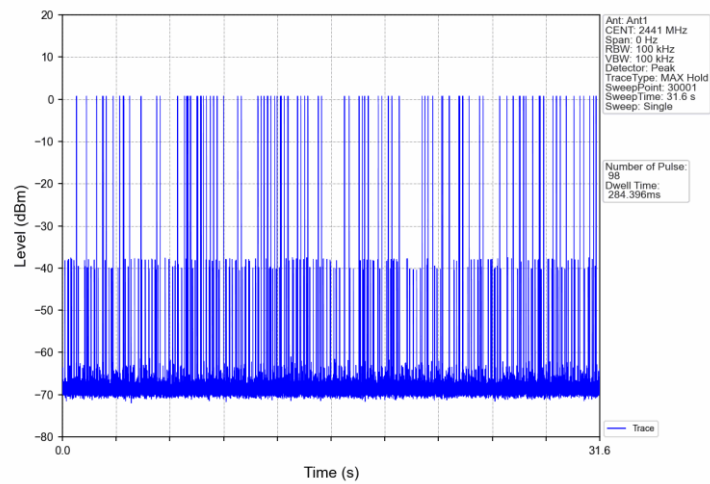

8DPSK_3DH1_HOPP_Ant1_NTNV

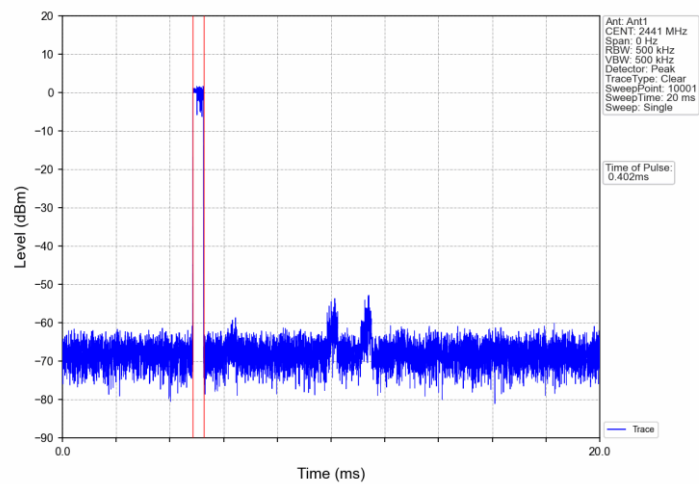

8DPSK_3DH1_HOPP_Ant1_NTNV

