


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_BT3M_2441MHz
test by :Kevin

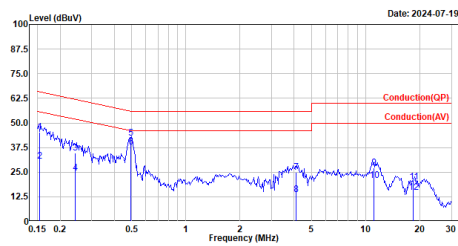

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.155	45.43	65.75	-20.32	35.75	9.68	QP
2	0.155	30.59	55.75	-25.16	20.91	9.68	Average
3	0.242	34.85	62.03	-27.18	25.17	9.68	QP
4	0.242	24.47	52.03	-27.56	14.79	9.68	Average
5	0.495	42.20	56.00	-13.88	32.52	9.68	QP
6	0.495	37.66	46.00	-8.42	27.98	9.68	Average
7	4.106	24.82	56.00	-31.18	14.29	10.53	QP
8	4.106	13.72	46.00	-32.28	3.19	10.53	Average
9	11.095	27.33	60.00	-32.67	16.53	10.80	QP
10	11.095	20.69	50.00	-29.31	9.89	10.80	Average
11	18.428	20.11	60.00	-39.89	9.39	10.72	QP
12	18.428	14.62	50.00	-35.38	3.90	10.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_BT3M_2441MHz
test by :Kevin

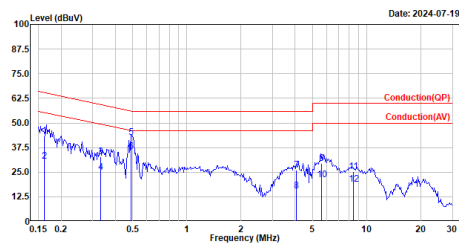


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.162	43.53	65.36	-21.83	33.87	9.66	QP
2	0.162	30.74	55.36	-24.62	21.08	9.66	Average
3	0.334	32.98	59.36	-26.38	23.32	9.66	QP
4	0.334	25.01	49.36	-24.35	15.35	9.66	Average
5	0.491	42.63	56.15	-13.52	32.97	9.66	QP
6	0.491	35.64	46.15	-10.51	25.98	9.66	Average
7	4.077	25.89	56.00	-30.11	15.39	10.50	QP
8	4.077	15.57	46.00	-30.43	5.07	10.50	Average
9	5.612	29.29	60.00	-30.71	18.47	10.82	QP
10	5.612	21.19	50.00	-28.81	10.37	10.82	Average
11	8.443	25.27	60.00	-34.73	14.47	10.80	QP
12	8.443	18.76	50.00	-31.24	7.96	10.80	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	Measure Level (kHz)	Limit (kHz)
GFSK	2402	971	-
	2441	953	-
	2480	956	-
$\pi/4$ DQPSK	2402	1280	-
	2441	1283	-
	2480	1307	-
8DPSK	2402	1295	-
	2441	1292	-
	2480	1295	-


GFSK / 2441 MHz

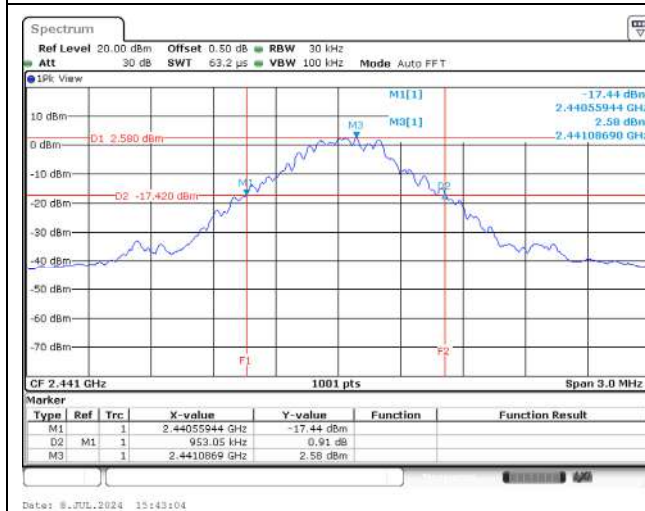

$\pi/4$ DQPSK / 2402 MHz

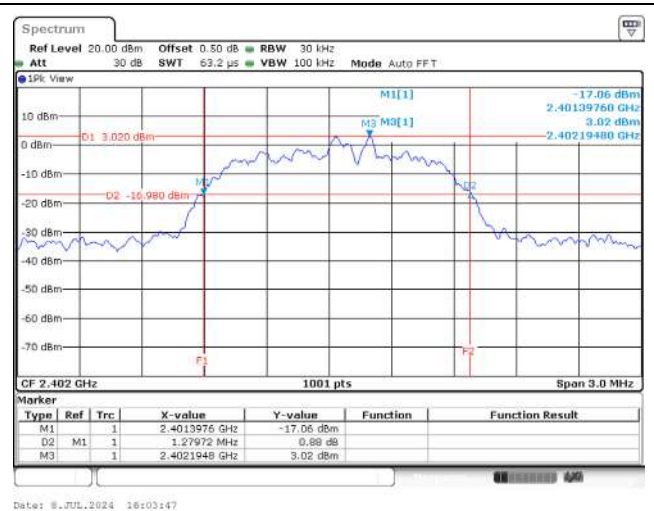


8DPSK / 2441 MHz

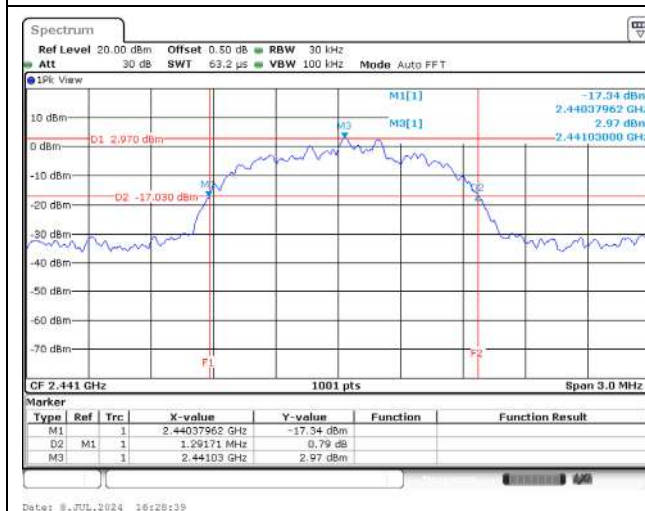


Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
GFSK	2402	1001	>25	647.4	Pass
	2441	1001	>25	635.4	Pass
	2480	998	>25	637.4	Pass
$\pi/4$ DQPSK	2402	1001	>25	853.1	Pass
	2441	1001	>25	855.1	Pass
	2480	998	>25	871.1	Pass
8DPSK	2402	1001	>25	863.1	Pass
	2441	998	>25	861.1	Pass
	2480	1001	>25	863.1	Pass


GFSK / 2480 MHz

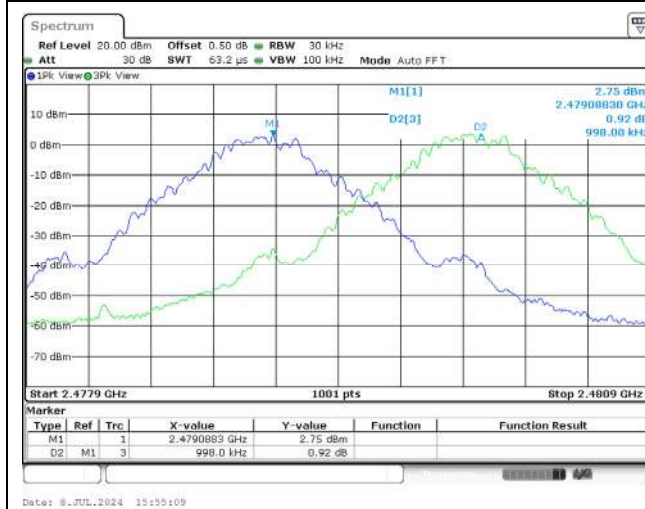

$\pi/4$ DQPSK / 2480 MHz

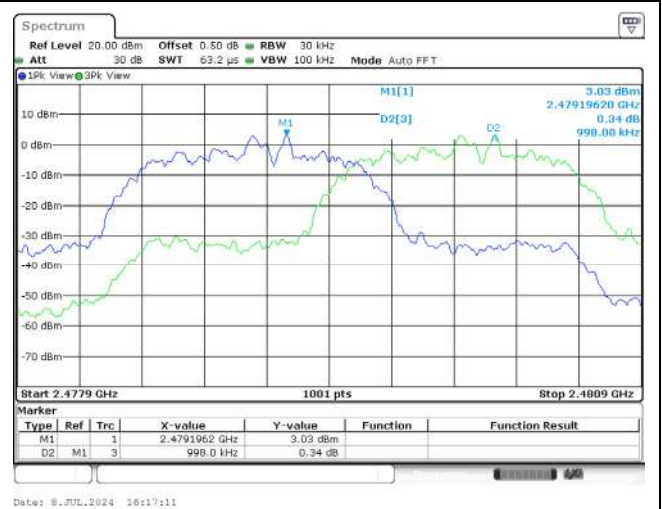

8DPSK / 2441 MHz

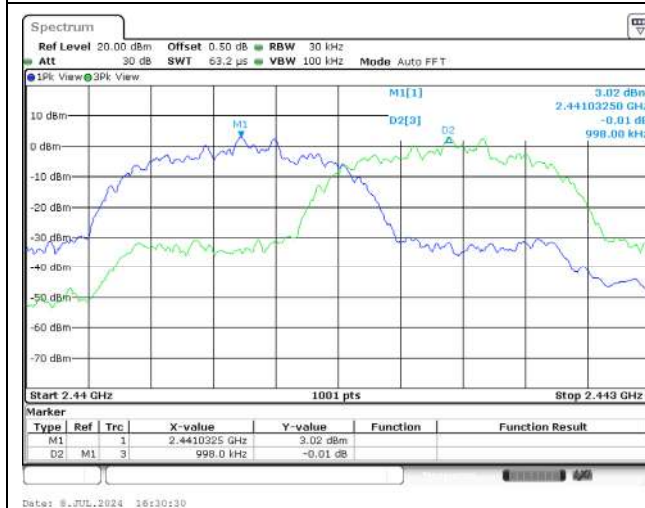


Appendix D. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	6.93	21.00	Pass
	2441	6.82	21.00	Pass
	2480	6.97	21.00	Pass
$\pi/4$ DQPSK	2402	6.92	21.00	Pass
	2441	6.89	21.00	Pass
	2480	6.86	21.00	Pass
8DPSK	2402	6.86	21.00	Pass
	2441	6.90	21.00	Pass
	2480	6.93	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Modulation	Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)	Result
GFSK	2402 ~ 2480	79	≥ 15	Pass
$\pi/4$ DQPSK	2402 ~ 2480	79	≥ 15	Pass
8DPSK	2402 ~ 2480	79	≥ 15	Pass


GFSK / 2402 ~ 2441 MHz

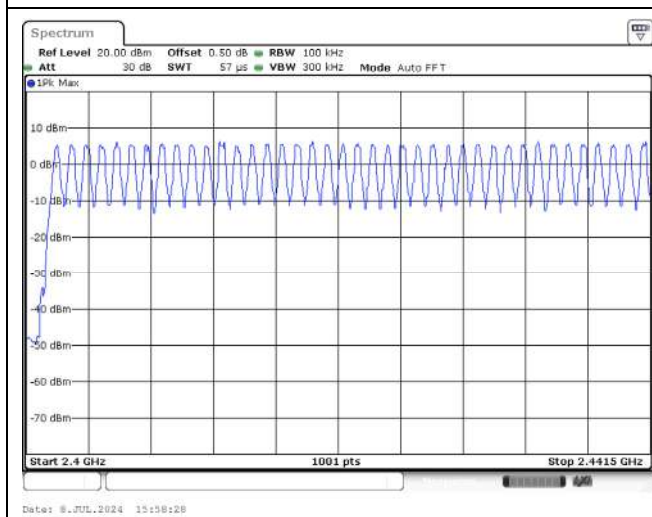


GFSK / 2442 ~ 2480 MHz

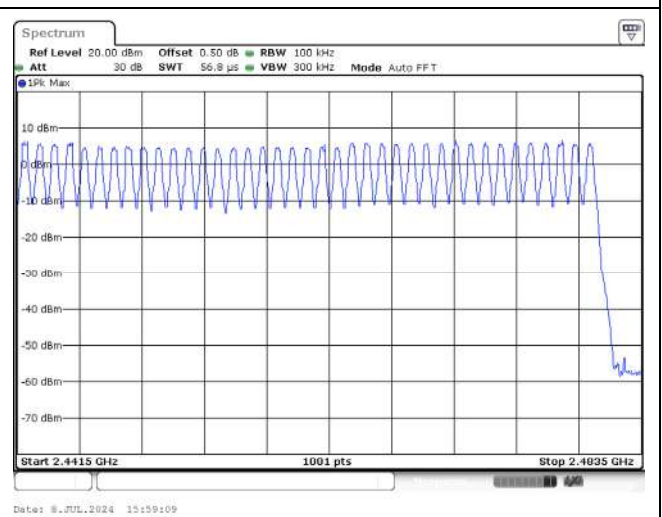


$\pi/4$ DQPSK / 2402 ~ 2441 MHz

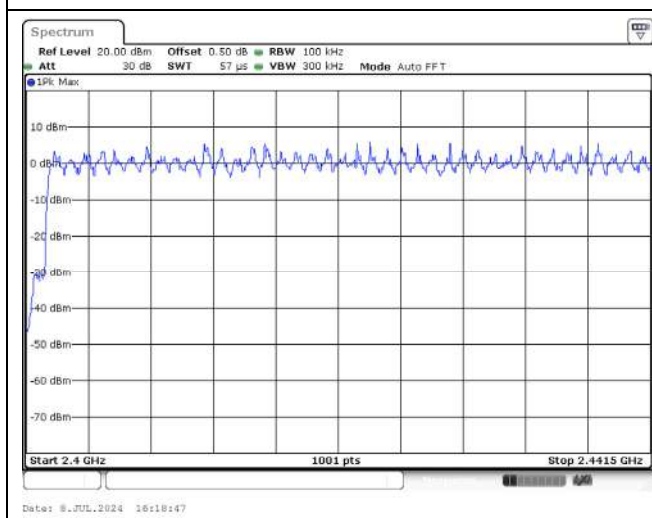


$\pi/4$ DQPSK / 2442 ~ 2480 MHz

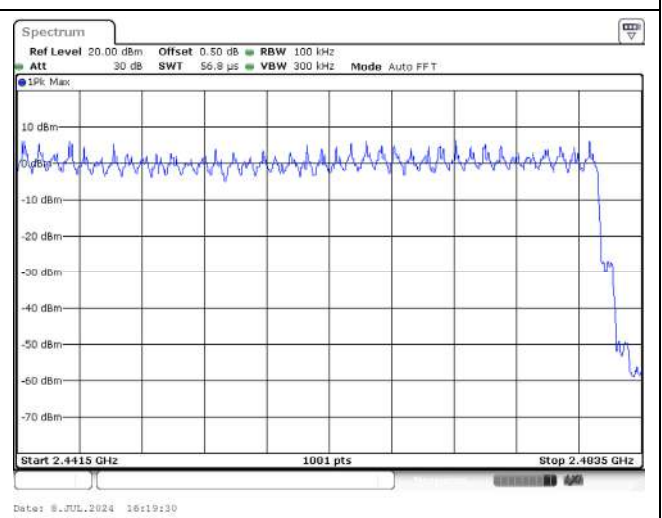


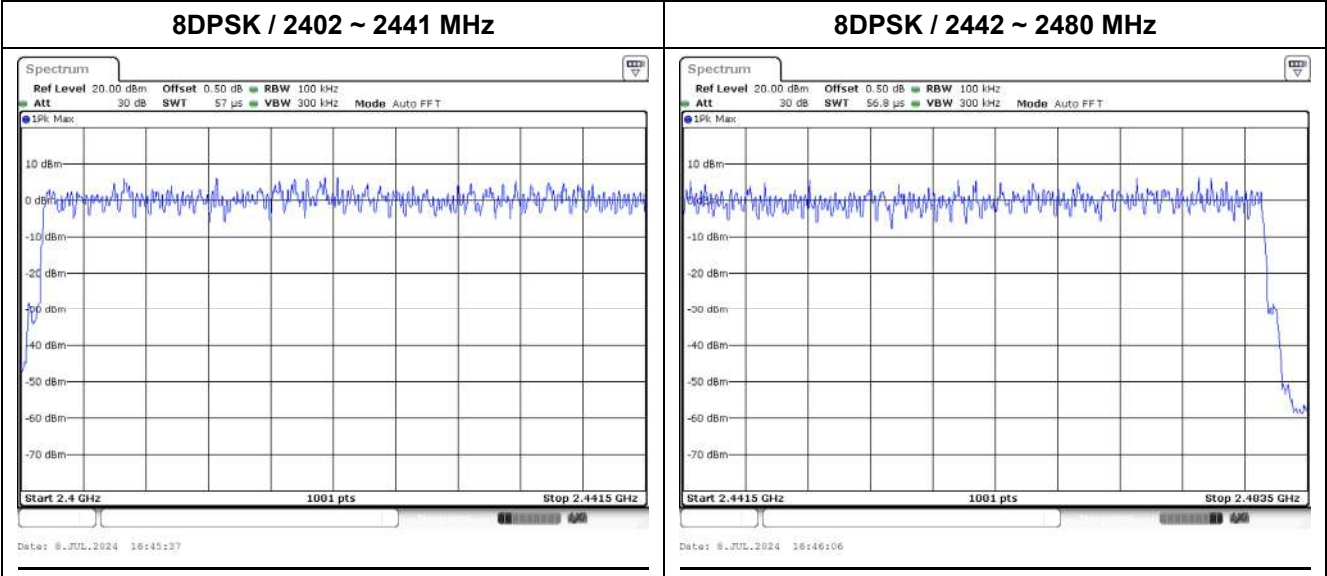


Appendix F. Test Result of Dwell Time


Modulation	Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
GFSK	2402	2.898	105	31600	304.290	400	Pass
	2441	2.898	112	31600	324.576	400	Pass
	2480	2.898	103	31600	298.494	400	Pass
$\pi/4$ DQPSK	2402	2.898	108	31600	312.984	400	Pass
	2441	2.898	98	31600	284.004	400	Pass
	2480	2.898	100	31600	289.800	400	Pass
8DPSK	2402	2.884	100	31600	288.400	400	Pass
	2441	2.898	96	31600	278.208	400	Pass
	2480	2.884	103	31600	297.052	400	Pass

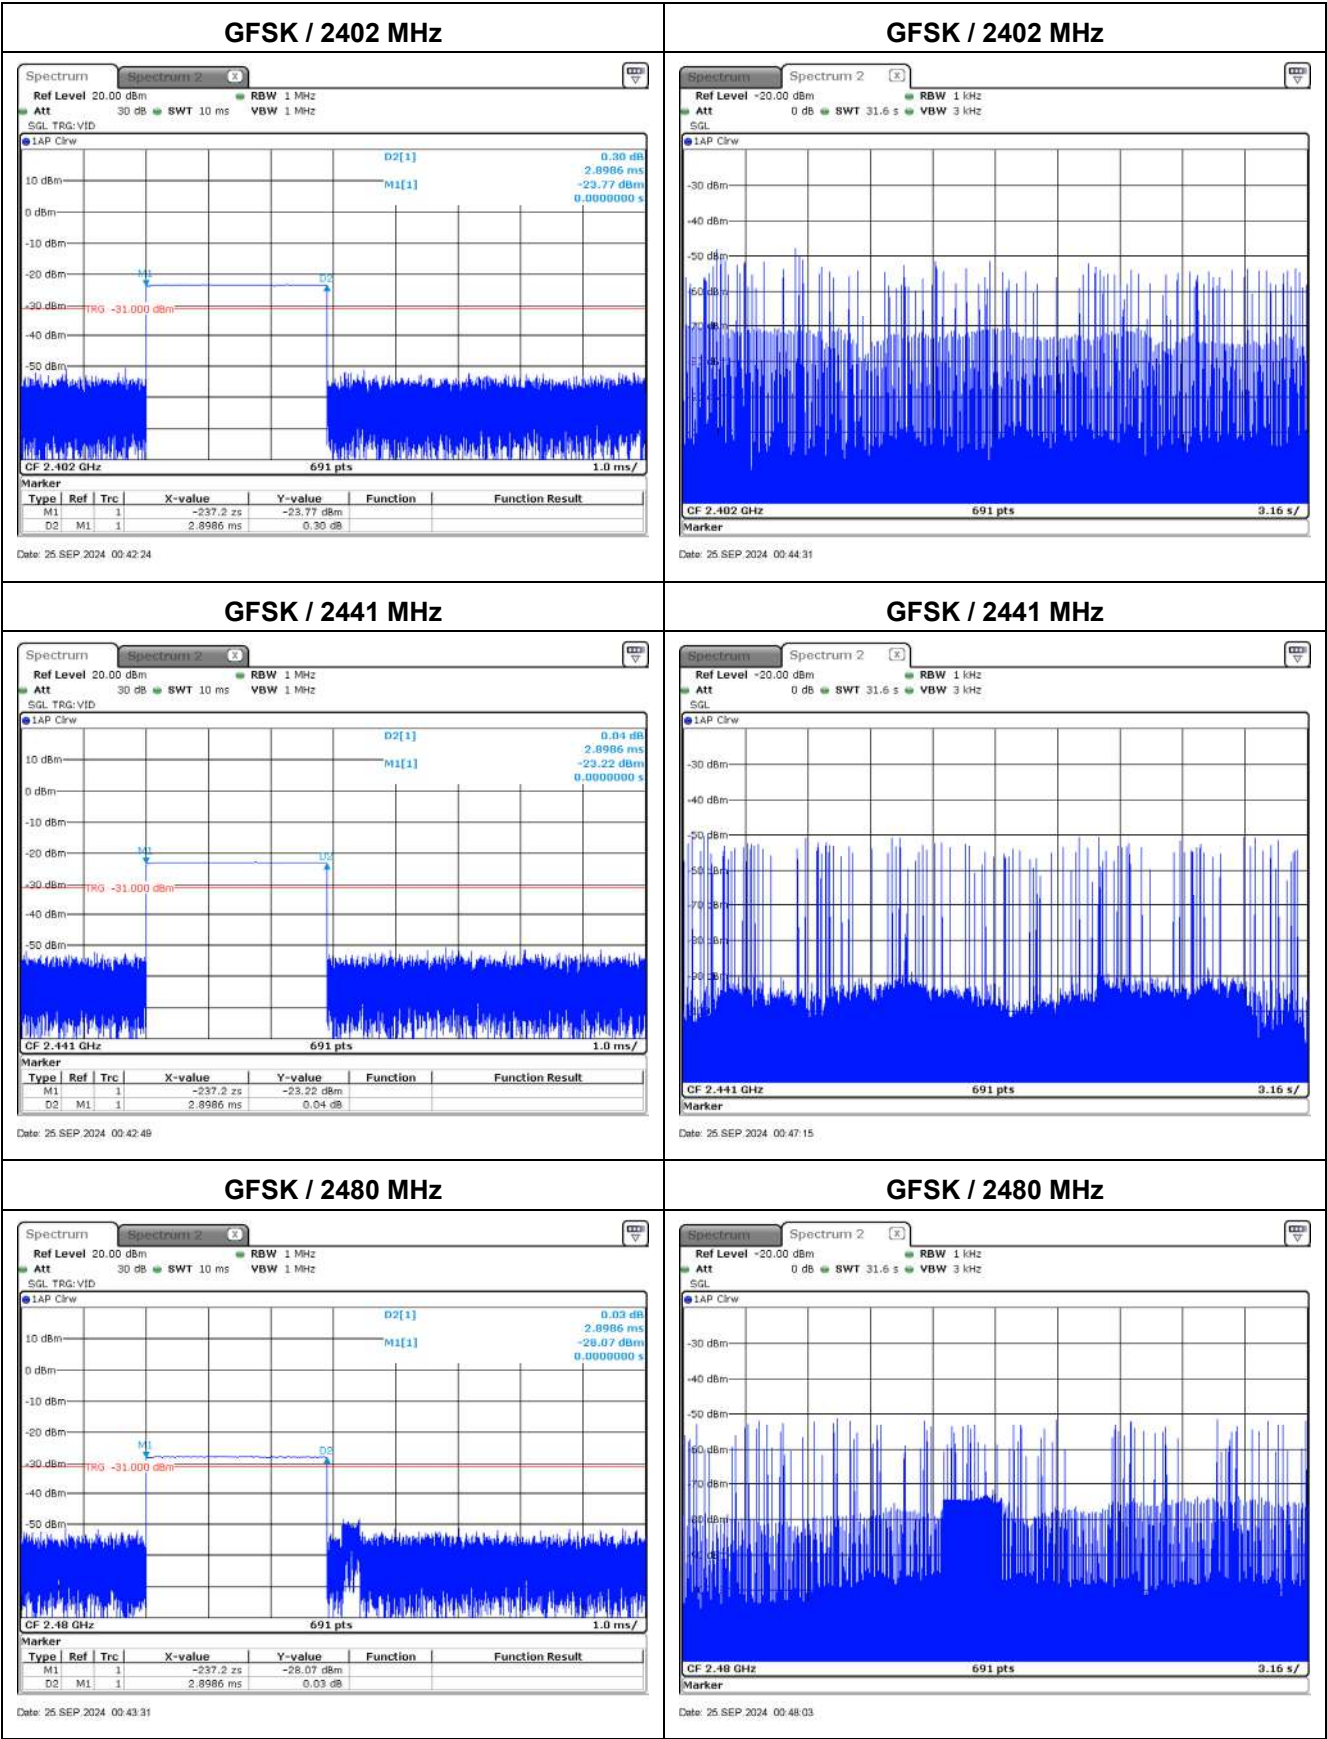

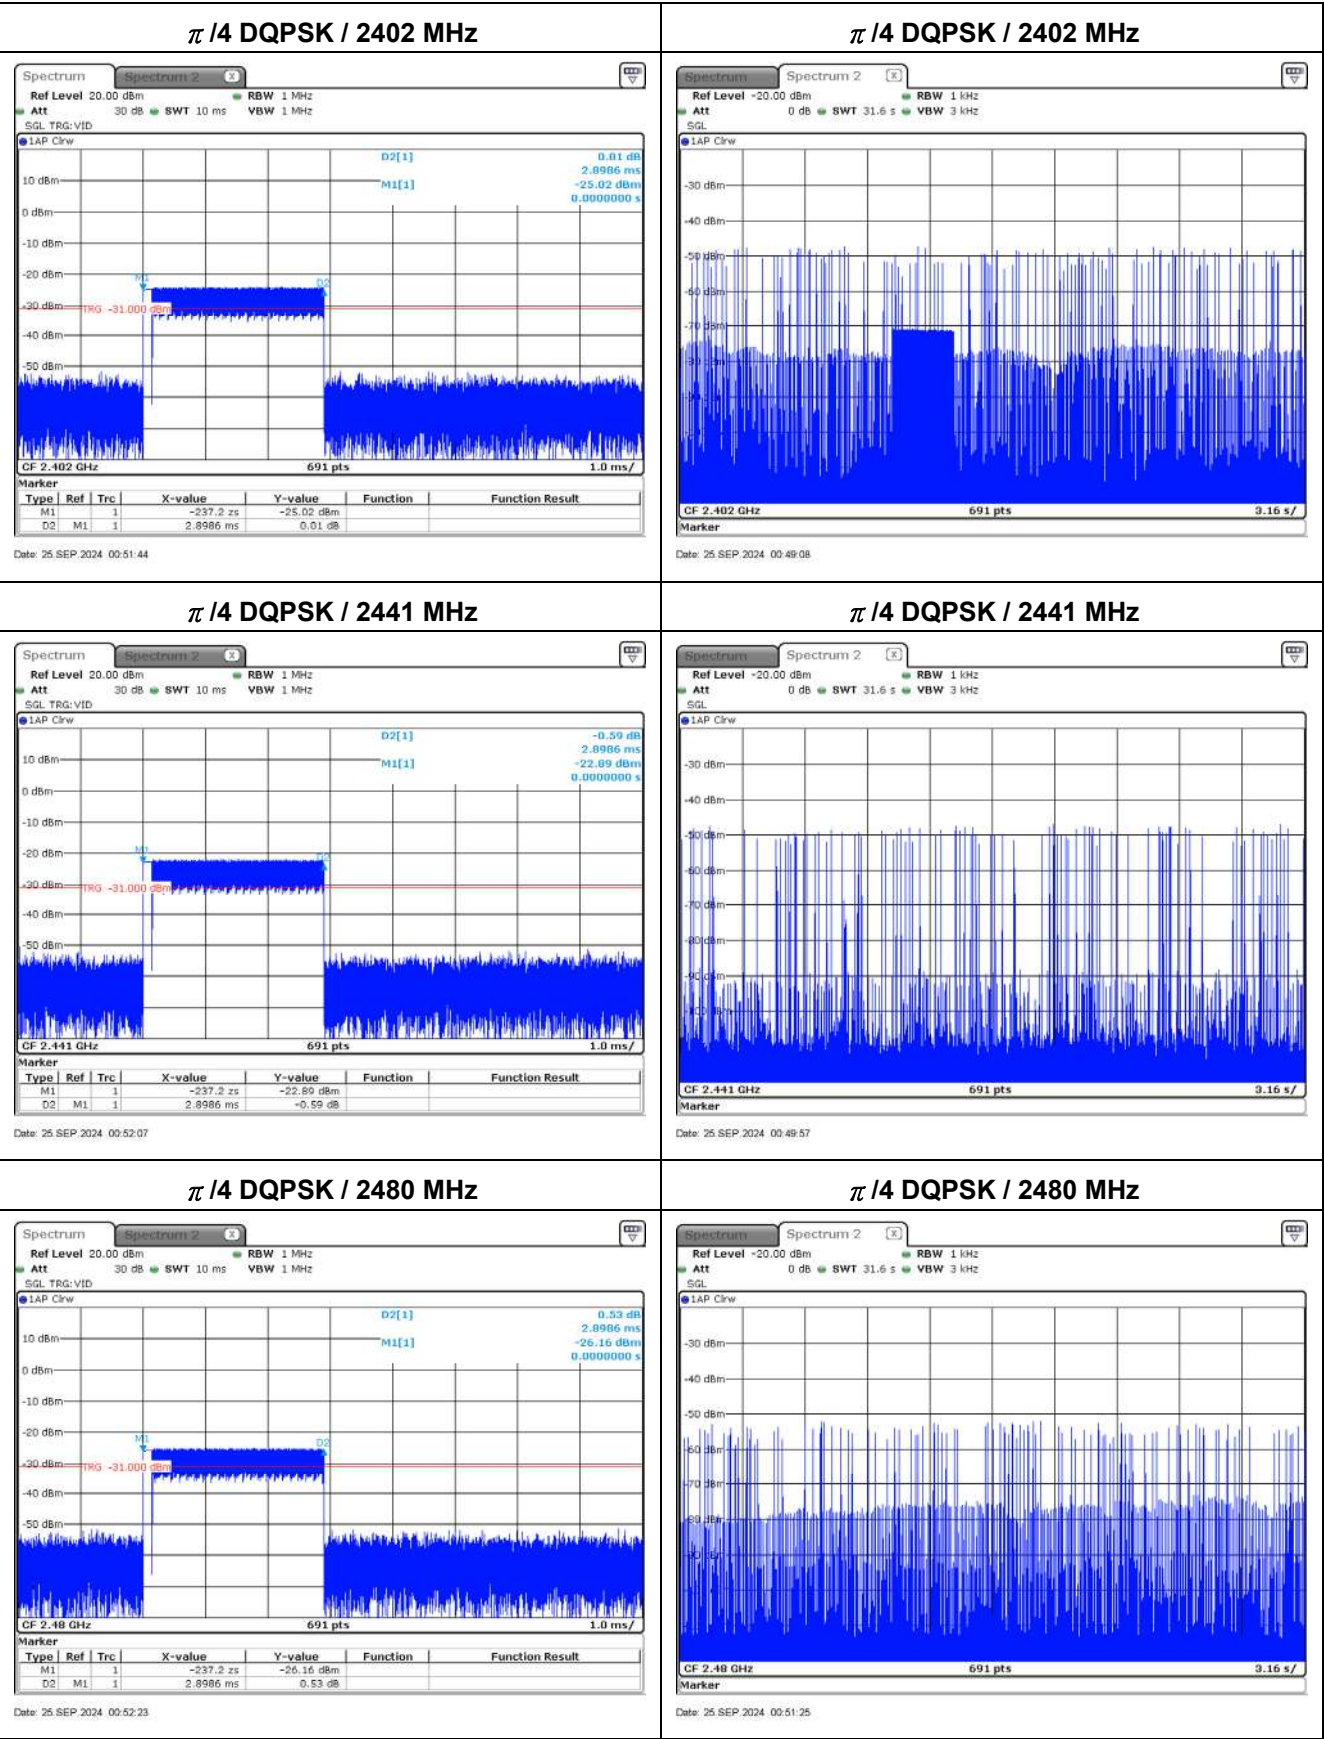

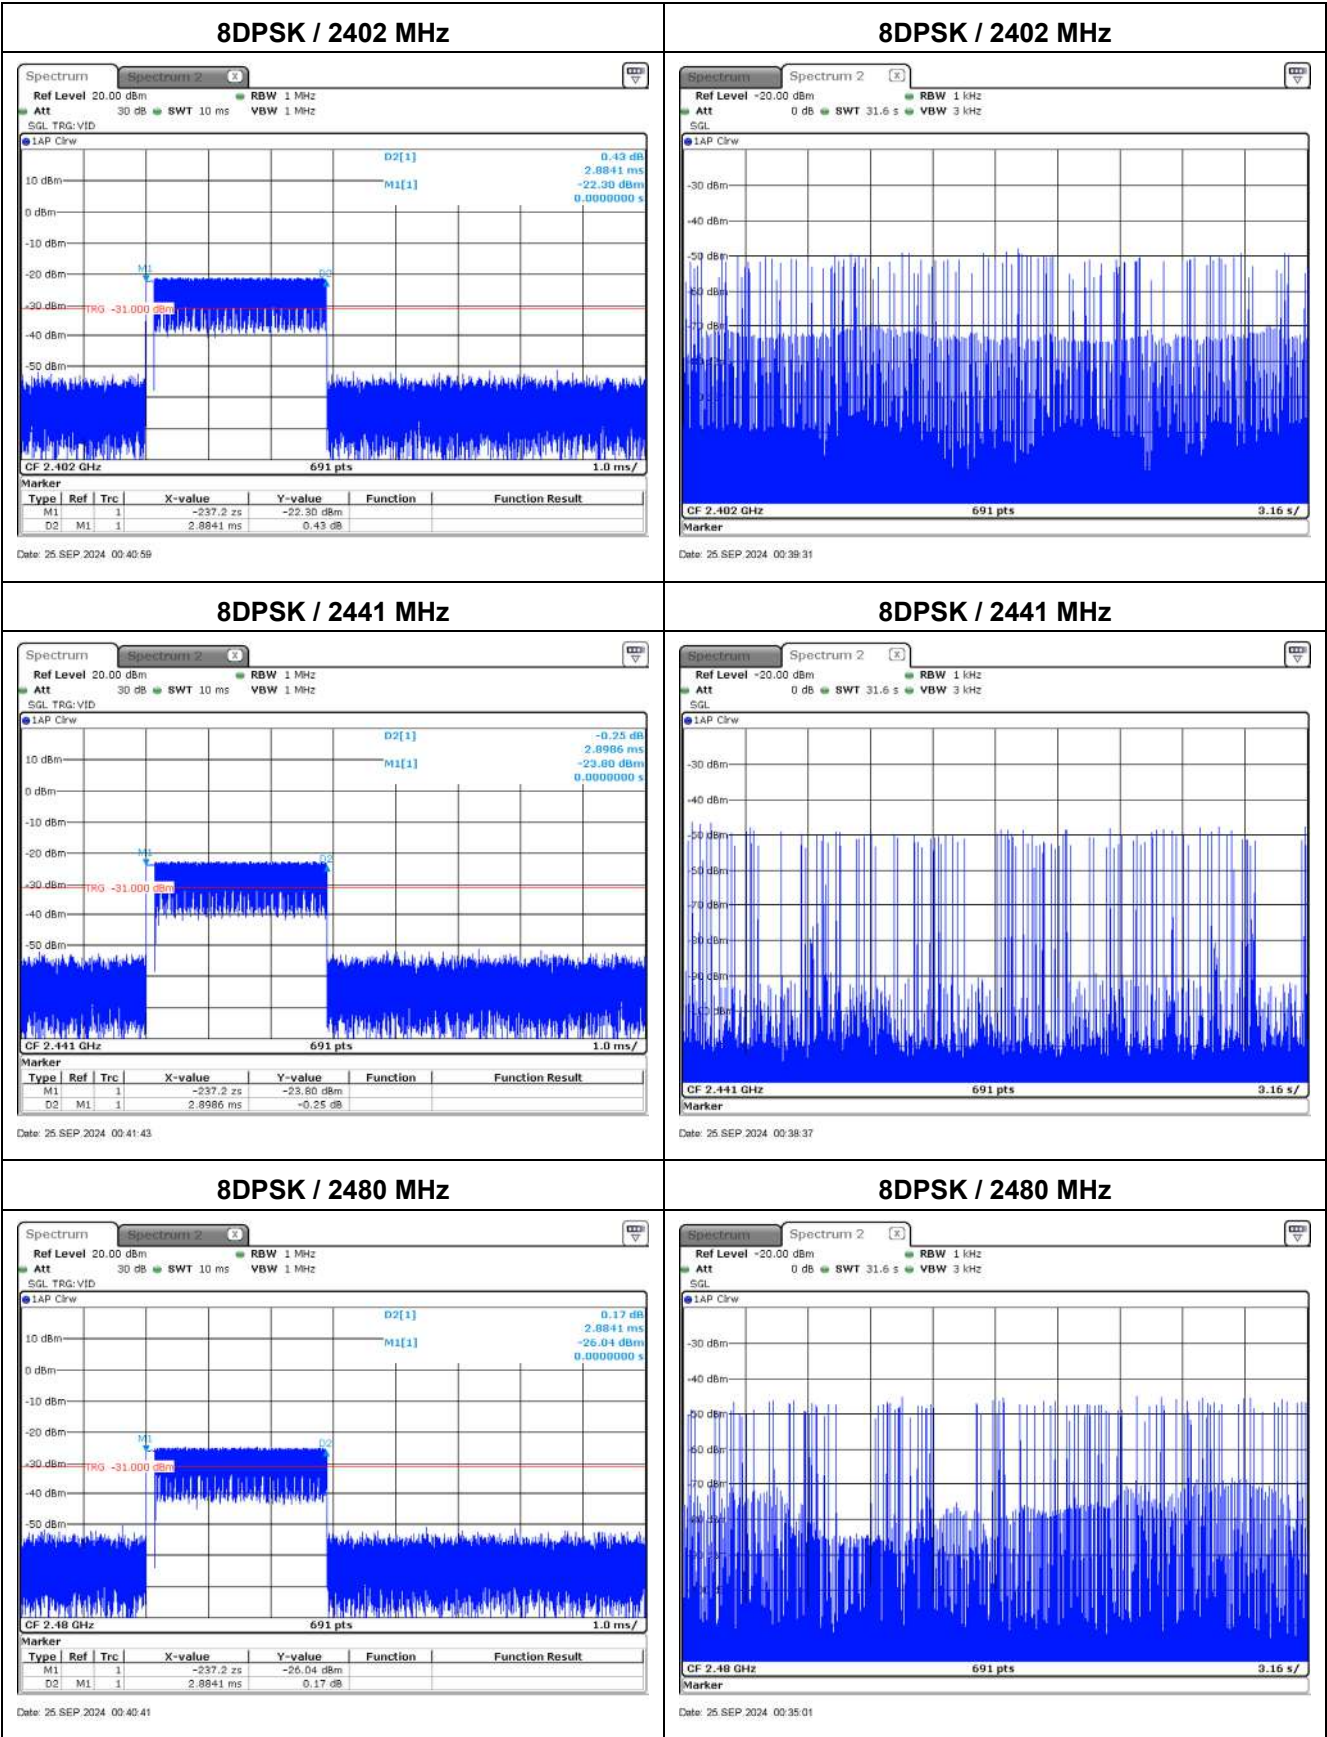



Appendix G. Test Result of Antenna Port Conducted Emission

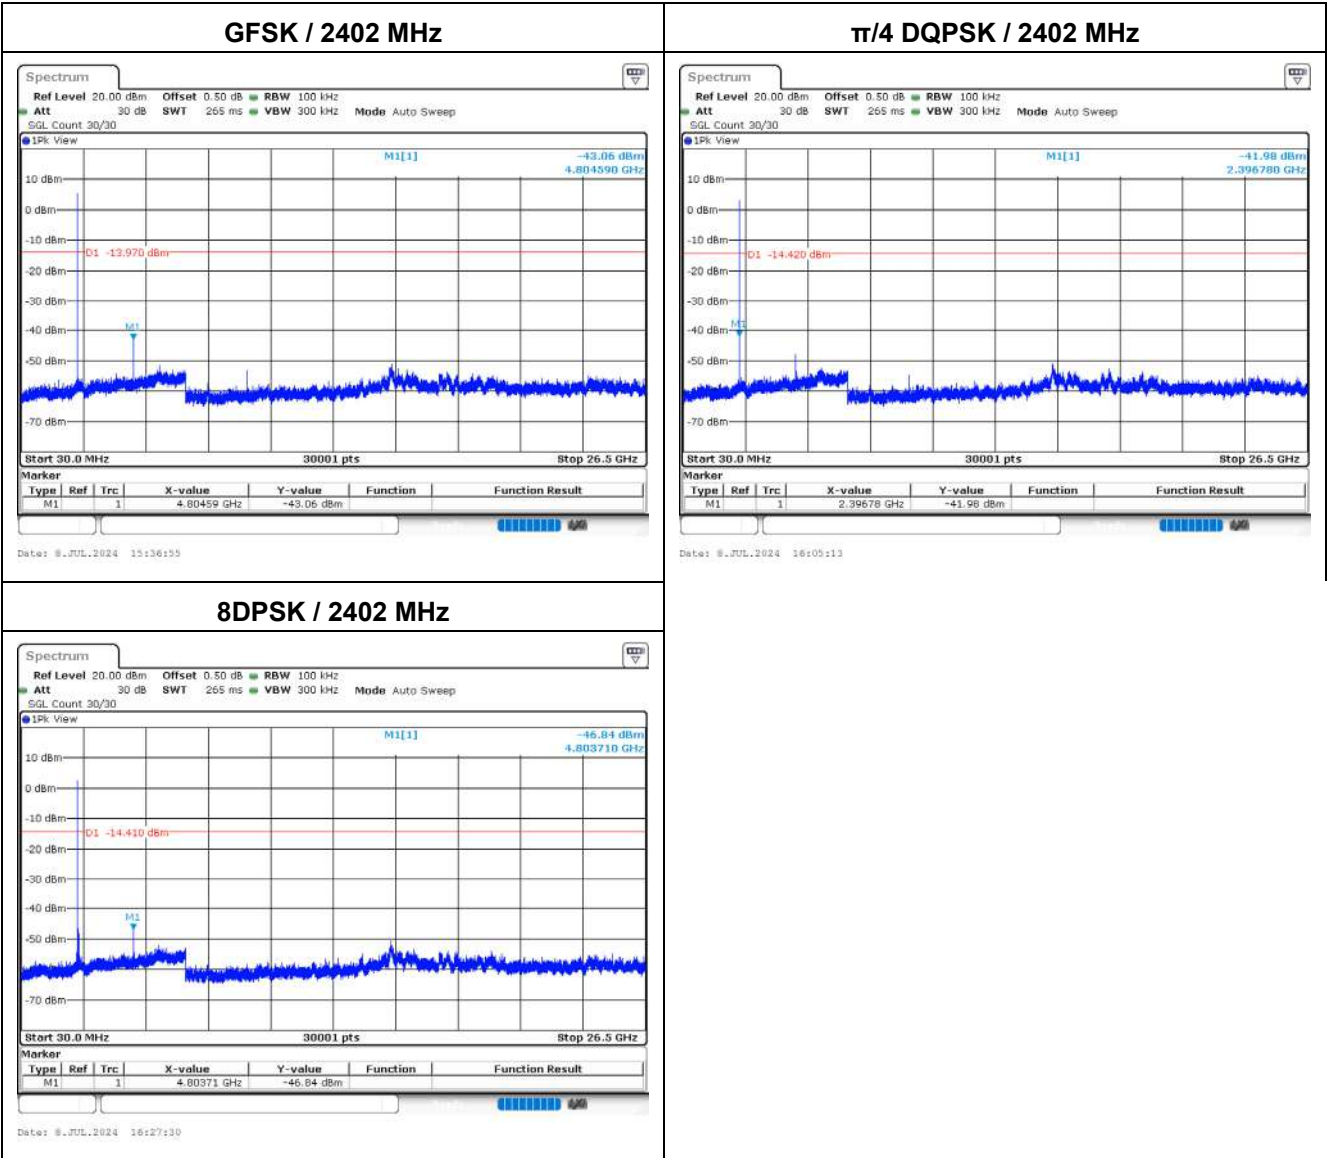

Hopping off

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
$\pi/4$ DQPSK	> 20	Pass
8DPSK	> 20	Pass


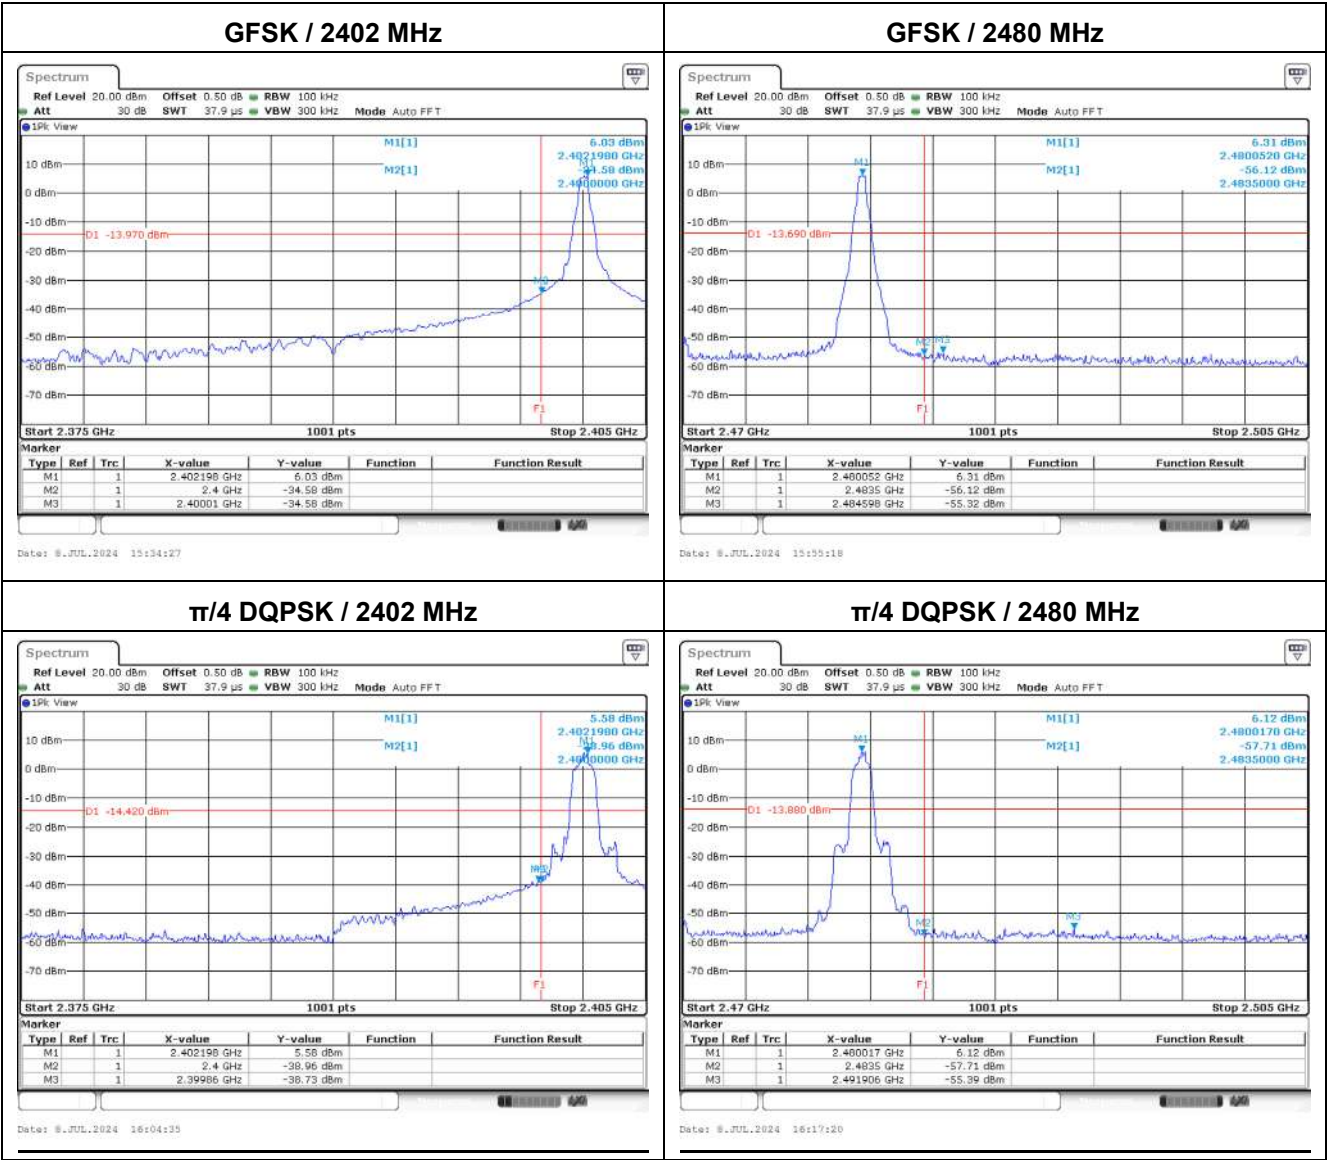


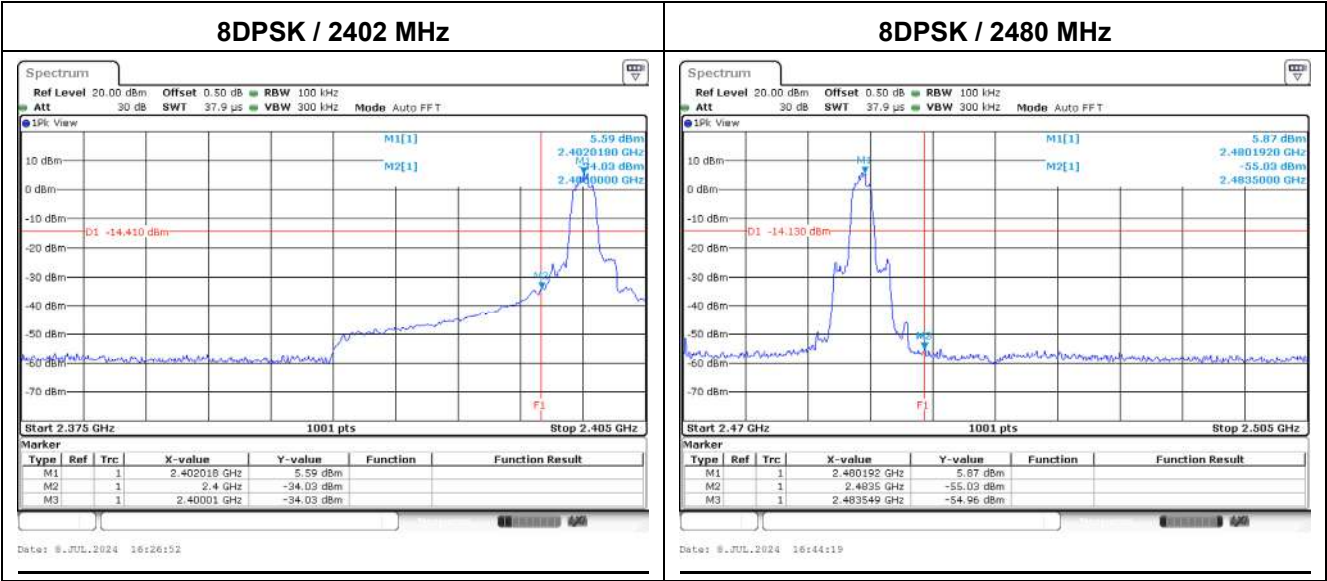


Hopping on

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
$\pi/4$ DQPSK	> 20	Pass
8DPSK	> 20	Pass

GFSK / 2402 MHz

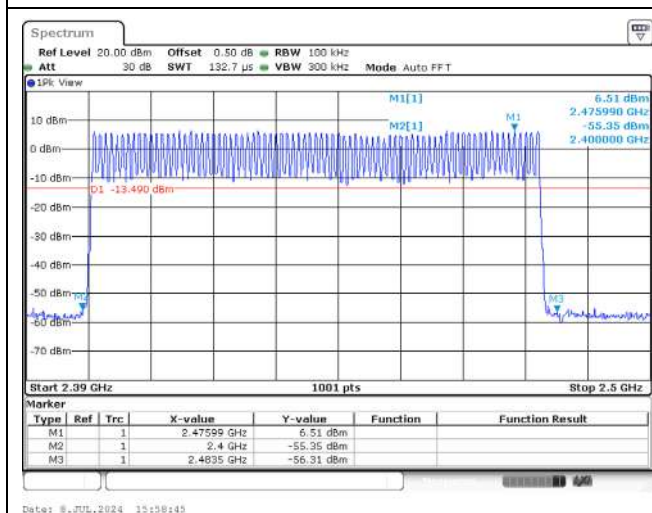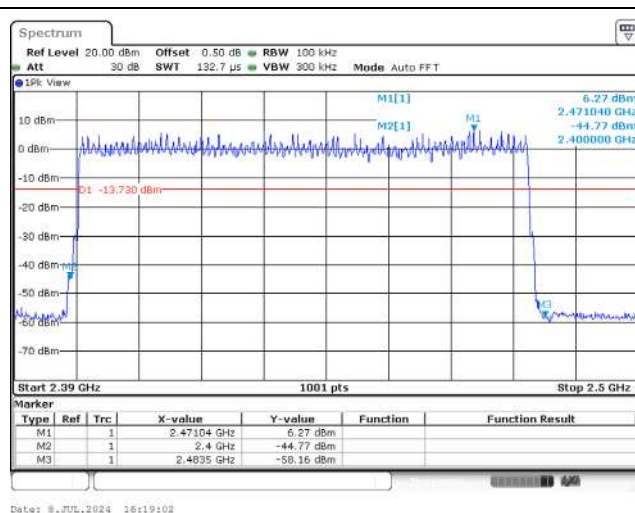 $\pi/4$ DQPSK / 2402 MHz

8DPSK / 2402 MHz

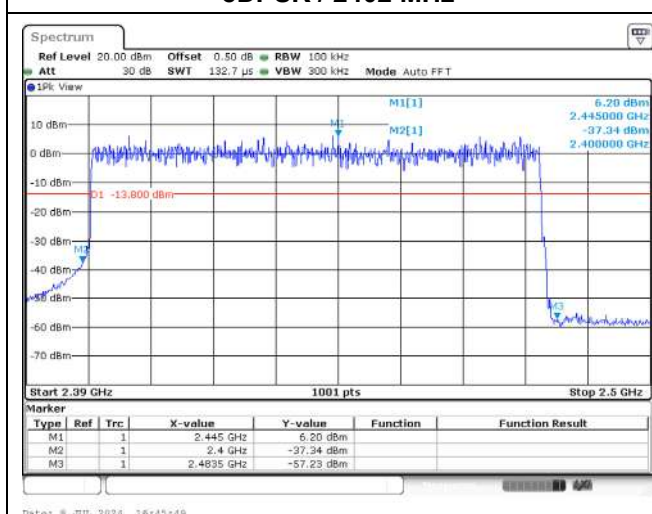


Appendix H. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2402MHz
Test by :Rock

Level (dBuV/m)

Date: 2024-07-12

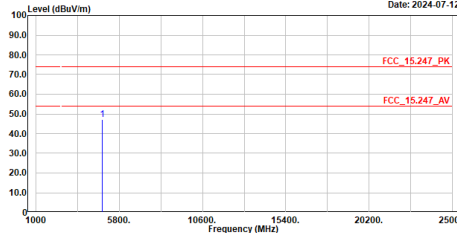

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	47.84	74.00	-26.96	54.18	-7.14	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2402MHz
Test by :Rock

Level (dBuV/m)

Date: 2024-07-12

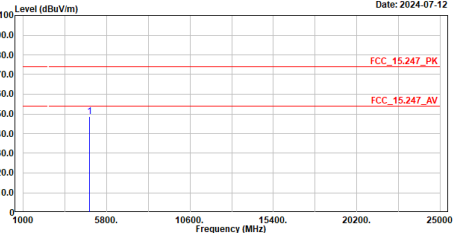

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	48.63	74.00	-25.37	55.77	-7.14	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2441MHz
Test by :Rock

Level (dBuV/m)

Date: 2024-07-12

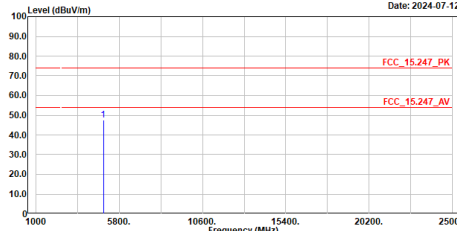

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	47.60	74.00	-26.40	54.40	-6.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2441MHz
Test by :Rock

Level (dBuV/m)

Date: 2024-07-12

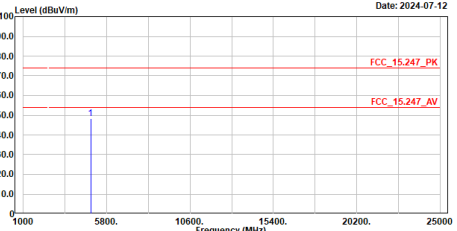


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	48.13	74.00	-25.87	54.93	-6.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2480MHz
Test by :Rock

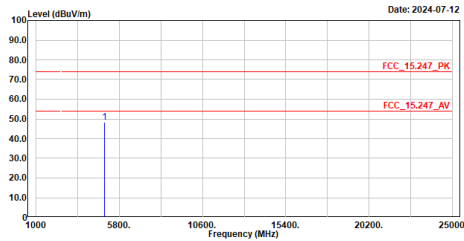


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	48.19	74.00	-25.81	54.70	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2480MHz
Test by :Rock

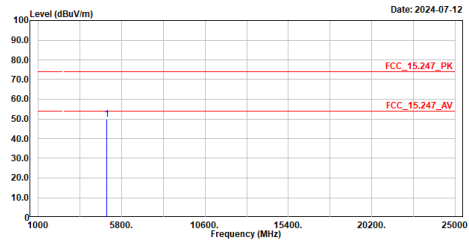


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.78	74.00	-24.22	56.29	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2402MHz
Test by :Rock

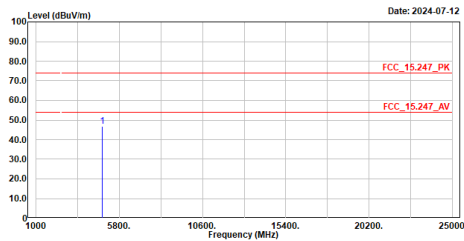


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	46.66	74.00	-27.34	53.80	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2402MHz
Test by :Rock

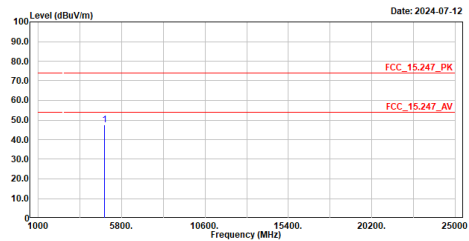


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	47.44	74.00	-26.56	54.58	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2441MHz
Test by :Rock

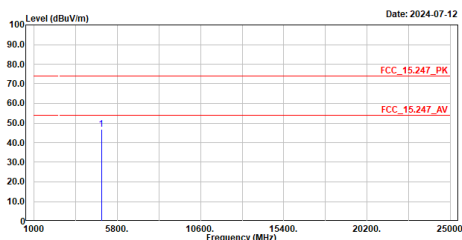


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	46.62	74.00	-27.38	53.42	-6.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2441MHz
Test by :Rock

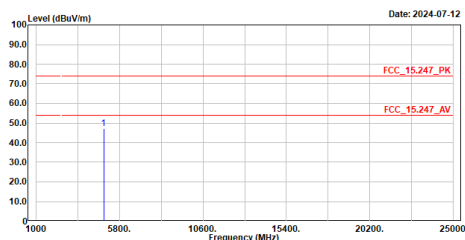


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	47.34	74.00	-26.66	54.14	-6.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2480MHz
Test by :Rock

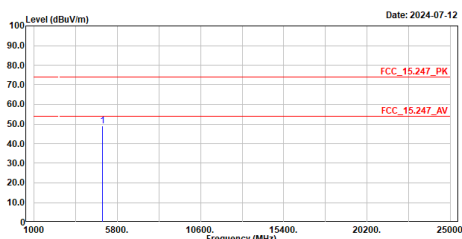


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.05	74.00	-24.95	55.56	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2480MHz
Test by :Rock

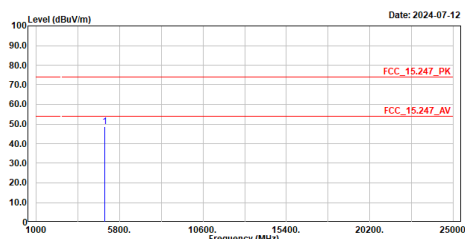


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	48.81	74.00	-25.19	55.32	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2402MHz
Test by :Rock

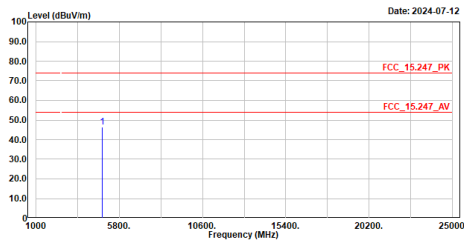


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	46.50	74.00	-27.50	53.64	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2402MHz
Test by :Rock

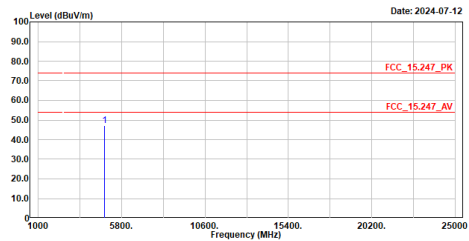


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	47.11	74.00	-26.89	54.25	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Rock

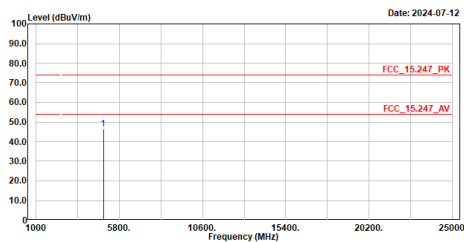


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	46.52	74.00	-27.48	53.32	-6.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Rock

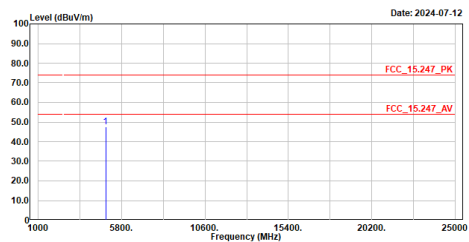


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	47.39	74.00	-26.61	54.19	-6.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2480MHz
Test by :Rock

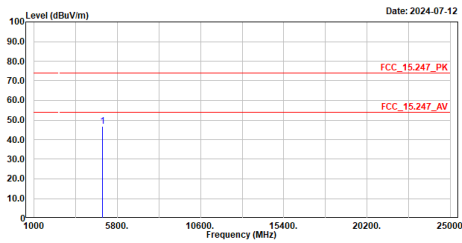


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	46.87	74.00	-27.13	53.38	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2480MHz
Test by :Rock

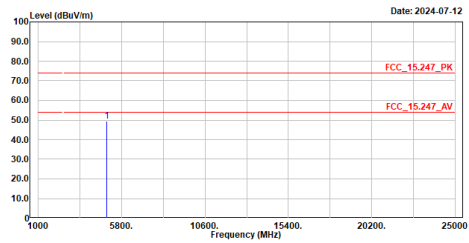


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.37	74.00	-24.63	55.88	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Rock

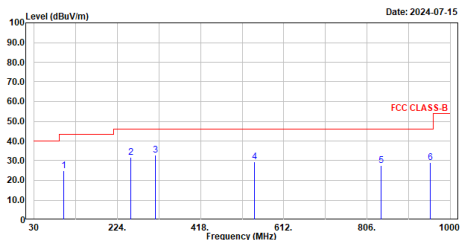


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	99.840	24.88	43.50	-18.62	52.82	-27.94	QP
2	255.913	31.53	46.00	-14.47	55.87	-24.34	QP
3	312.658	32.76	46.00	-13.24	54.97	-22.21	QP
4	543.324	29.53	46.00	-16.47	46.34	-16.81	QP
5	838.980	27.59	46.00	-18.41	39.24	-11.65	QP
6	953.149	29.19	46.00	-16.81	39.36	-10.17	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Rock

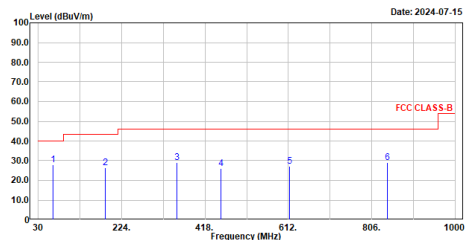


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	65.017	27.99	40.00	-12.01	53.05	-25.06	QP
2	186.655	26.31	43.50	-17.19	52.05	-25.74	QP
3	352.840	28.91	46.00	-17.09	50.36	-21.45	QP
4	454.957	26.23	46.00	-19.77	44.54	-18.31	QP
5	614.910	27.06	46.00	-18.94	42.11	-15.05	QP
6	841.890	29.11	46.00	-16.89	40.70	-11.59	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT1M_2402MHz
 Test by :Rock

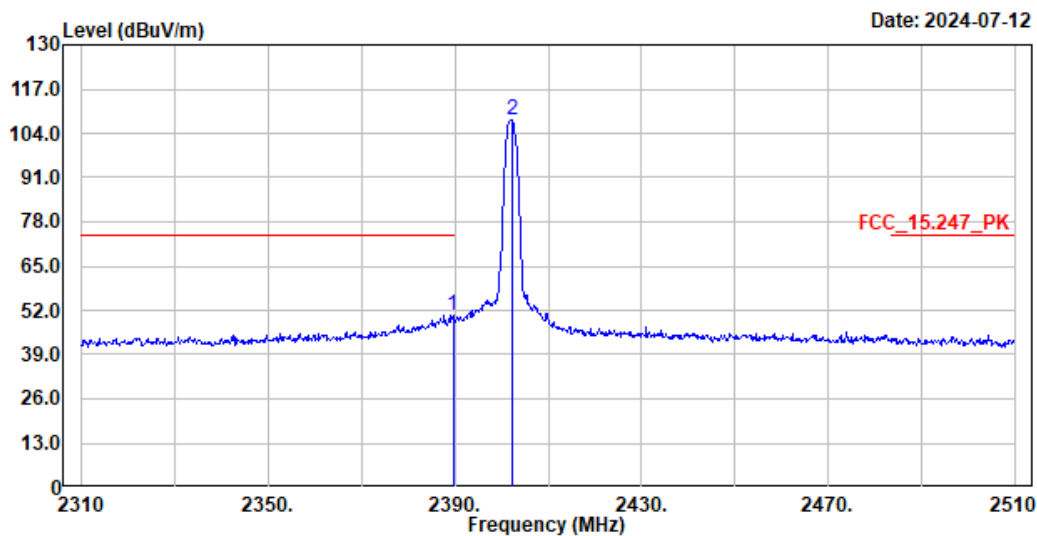

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	50.55	74.00	-23.45	44.46	6.09	Peak
2	2402.200	107.86	-----	-----	101.86	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.6	50.55	-24.731	25.819	-28.181	54.000
2402.2	107.86	-24.731	83.129	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT1M_2402MHz
 Test by :Rock

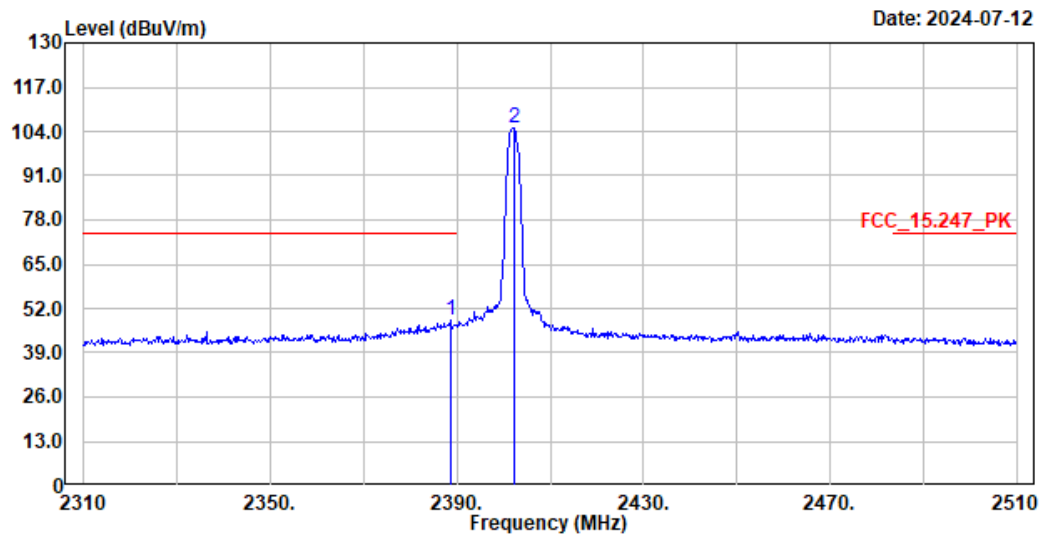

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.600	48.66	74.00	-25.34	42.57	6.09	Peak
2	2402.200	104.97	-----	-----	98.97	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2388.6	48.66	-24.731	23.929	-30.071	54.000
2402.2	104.97	-24.731	80.239	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT1M_2480MHz
 Test by :Nova

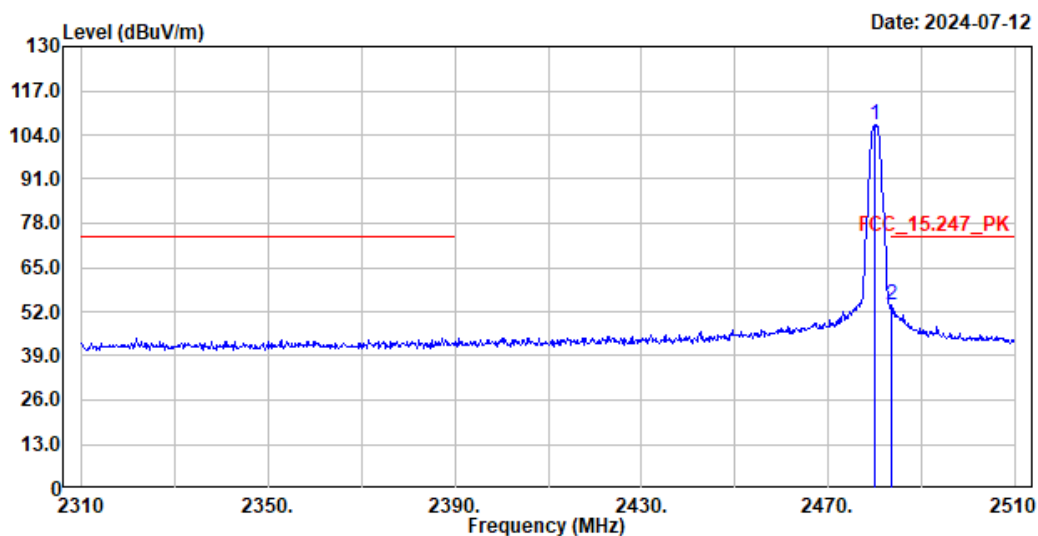

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	106.71	-----	-----	100.77	5.94	Peak
2	2483.600	53.99	74.00	-20.01	48.01	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	106.71	-24.731	81.979	--	--
2483.6	53.99	-24.731	29.259	-24.741	54.000

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2480MHz
Test by :Nova

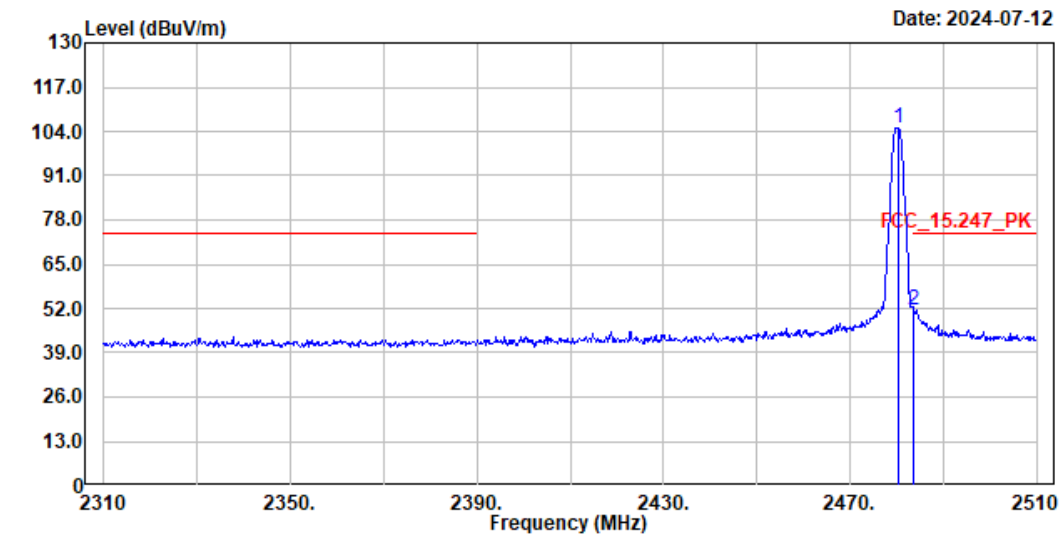

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.01	-----	-----	99.07	5.94	Peak
2	2483.600	51.43	74.00	-22.57	45.45	5.98	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	105.01	-24.731	80.279	--	--
2483.6	51.43	-24.731	26.699	-27.301	54.000

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT2M_2402MHz
 Test by :Rock

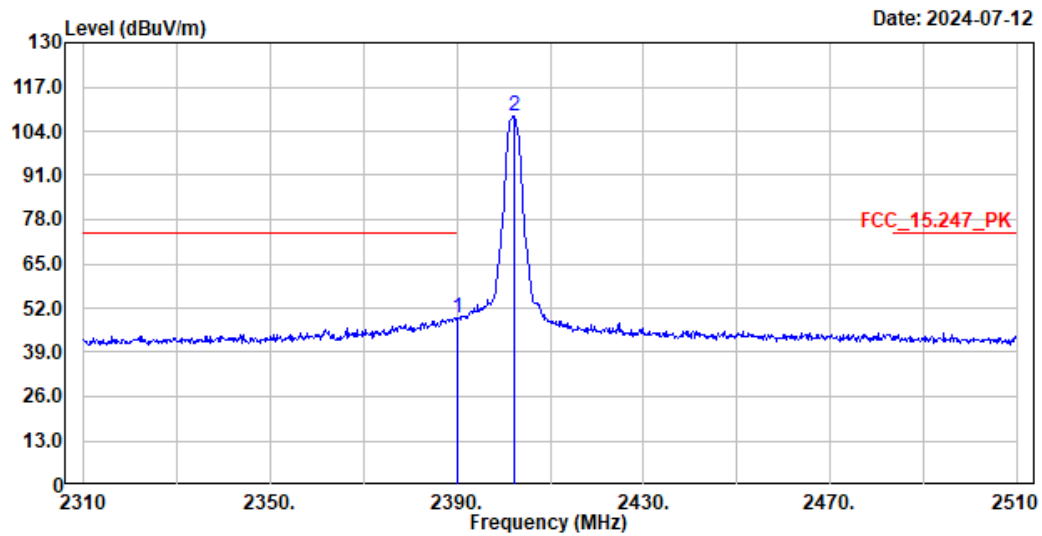

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	49.17	74.00	-24.83	43.08	6.09	Peak
2	2402.200	108.26	-----	-----	102.26	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	49.17	-24.731	24.439	-29.561	54.000
2402.2	108.26	-24.731	83.529	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT2M_2402MHz
 Test by :Rock

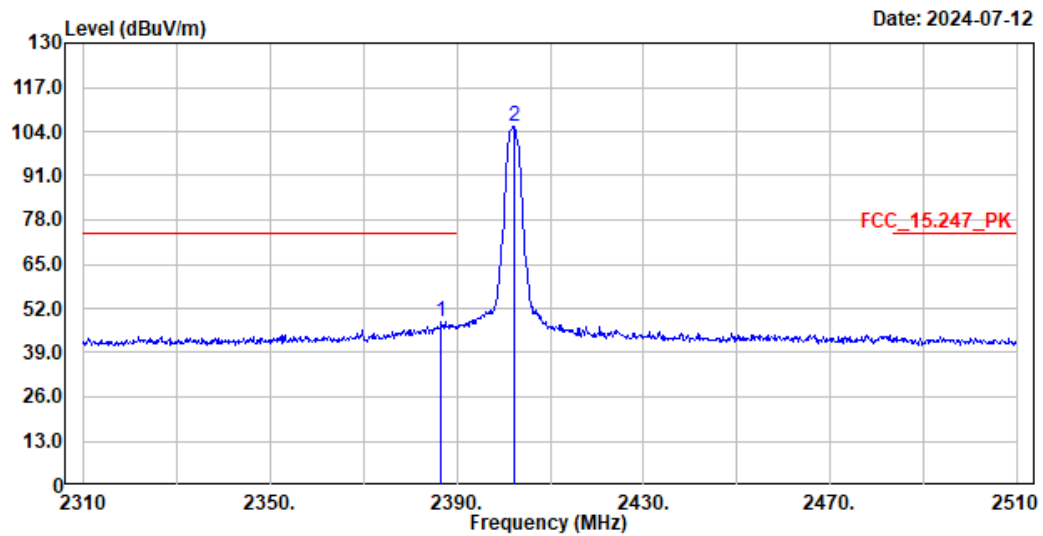

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.600	48.21	74.00	-25.79	42.12	6.09	Peak
2	2402.200	105.32	-----	-----	99.32	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2386.6	48.21	-24.731	23.479	-30.521	54.000
2402.2	105.32	-24.731	80.589	--	--

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT2M_2480MHz
Test by :Nova

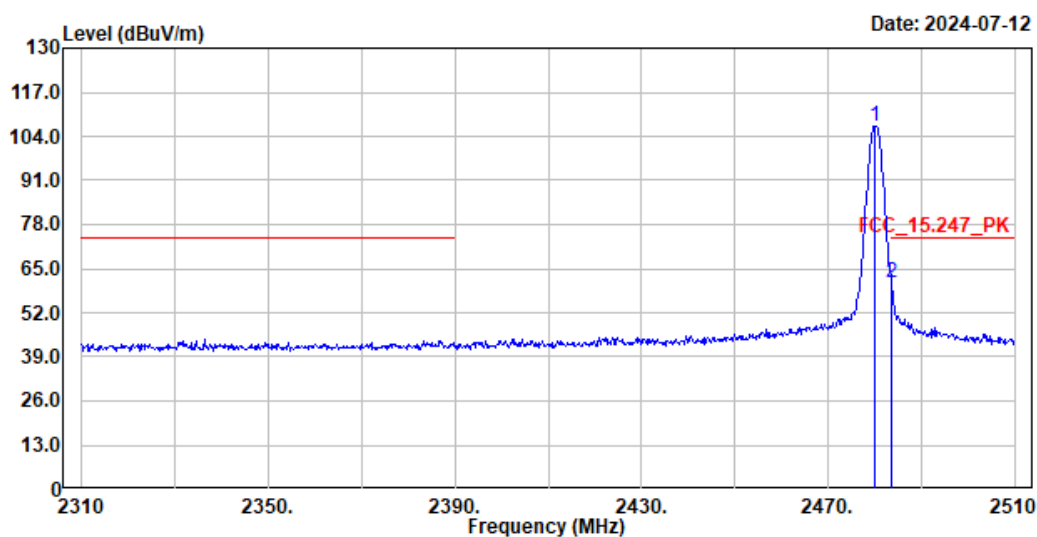

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.000	107.00	-----	-----	101.06	5.94	Peak
2	2483.600	60.65	74.00	-13.35	54.67	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	107.00	-24.731	82.269	--	--
2483.6	60.65	-24.731	35.919	-18.081	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT2M_2480MHz
 Test by :Nova

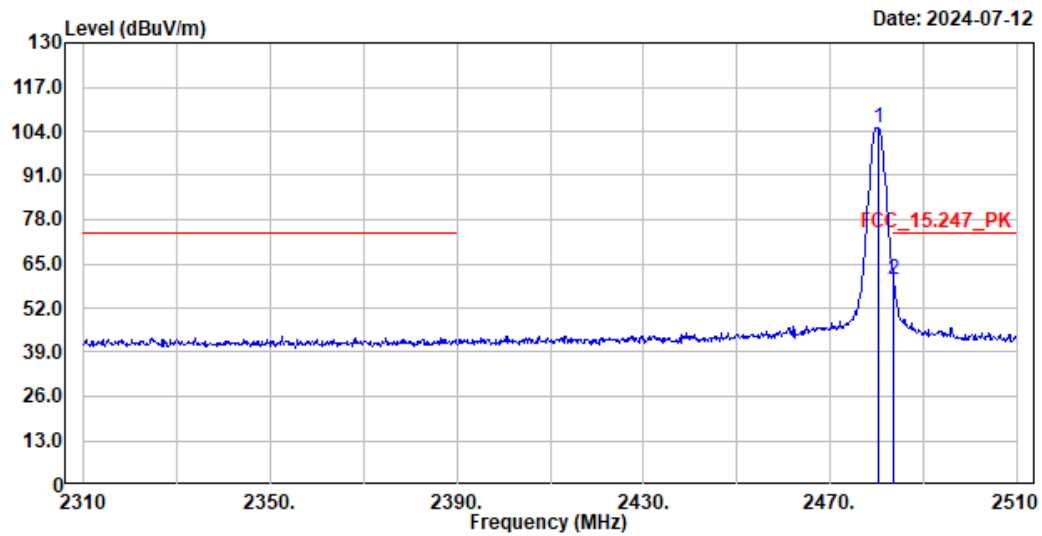

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.19	-----	-----	99.25	5.94	Peak
2	2483.600	60.40	74.00	-13.60	54.42	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	105.19	-24.731	80.459	--	--
2483.6	60.40	-24.731	35.669	-18.331	54.000

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT3M_2402MHz
 Test by :Rock

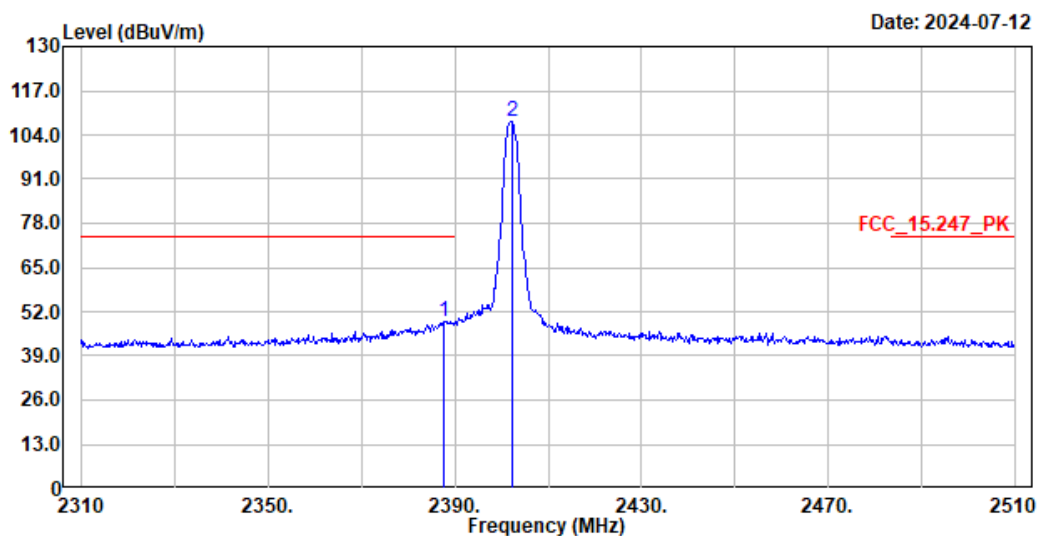

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.800	49.18	74.00	-24.82	43.09	6.09	Peak
2	2402.200	108.07	-----	-----	102.07	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2387.8	49.18	-24.731	24.449	-29.551	54.000
2402.2	108.07	-24.731	83.339	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT3M_2402MHz
 Test by :Rock

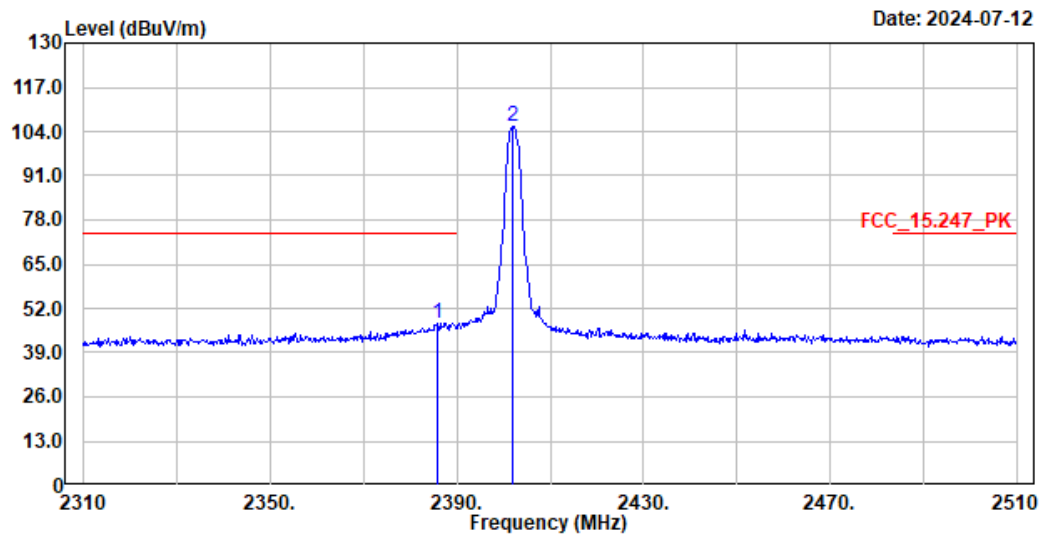

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	47.68	74.00	-26.32	41.60	6.08	Peak
2	2402.000	105.46	-----	-----	99.46	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2385.8	47.68	-24.731	22.949	-31.051	54.000
2402	105.46	-24.731	80.729	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT3M_2480MHz
 Test by :Nova

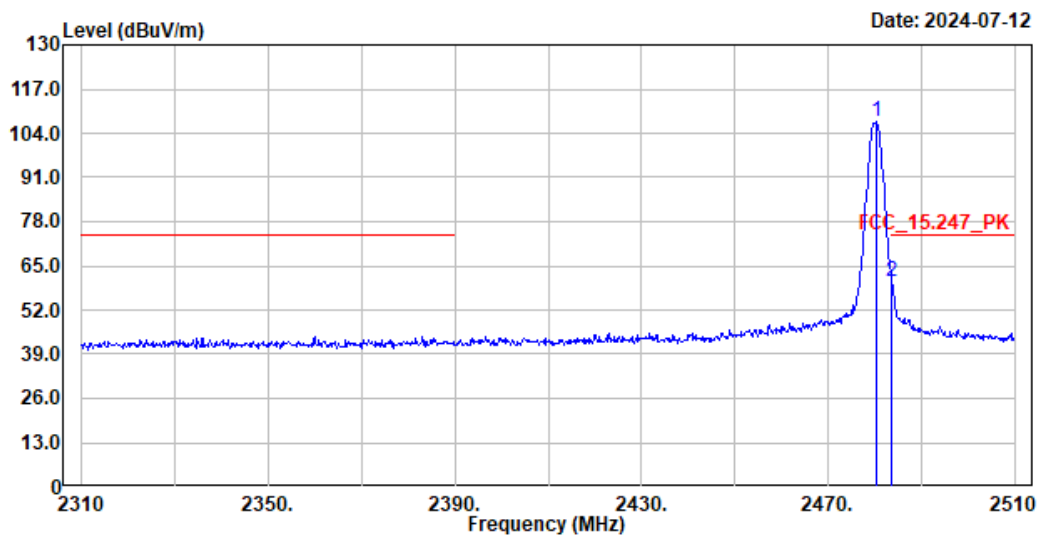

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	107.22	-----	-----	101.28	5.94	Peak
2	2483.600	60.57	74.00	-13.43	54.59	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	107.22	-24.731	82.489	--	--
2483.6	60.57	-24.731	35.839	-18.161	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT3M_2480MHz
 Test by :Nova

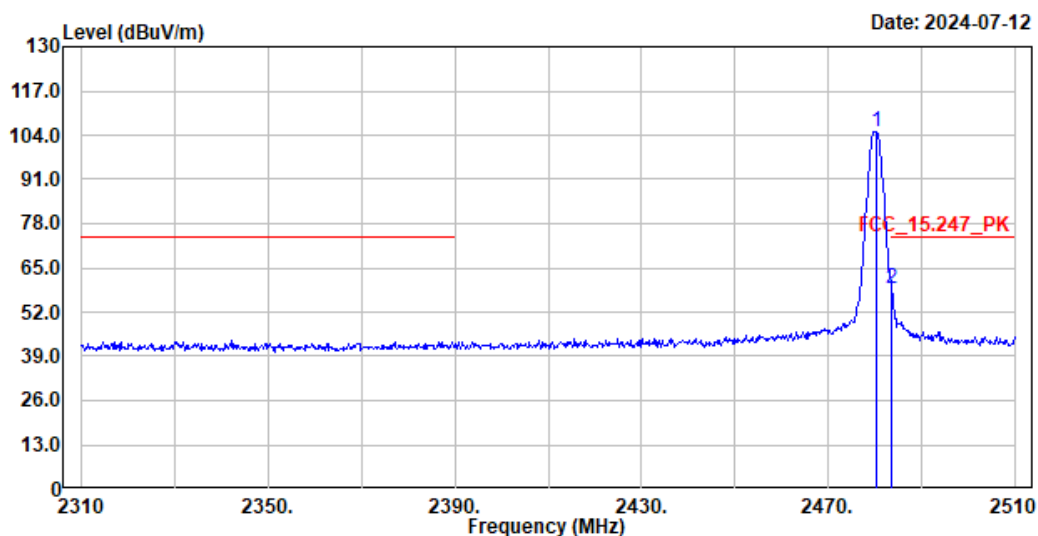

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.18	-----	-----	99.24	5.94	Peak
2	2483.600	58.91	74.00	-15.09	52.93	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480.2	105.18	-24.731	80.449	--	--
2483.6	58.91	-24.731	34.179	-19.821	54.000