


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_BT3M_2441MHz
test by :Kevin

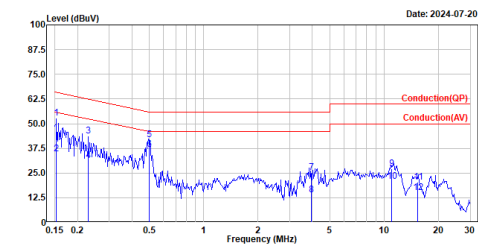

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.153	52.84	65.83	-12.99	43.16	9.68	QP
2	0.153	34.65	55.83	-21.18	24.97	9.68	Average
3	0.229	43.90	62.49	-18.59	34.22	9.68	QP
4	0.229	31.43	52.49	-21.06	21.75	9.68	Average
5	0.497	41.73	56.04	-14.31	32.05	9.68	QP
6	0.497	36.99	46.04	-9.05	27.31	9.68	Average
7	3.941	25.11	56.00	-30.89	14.63	10.48	QP
8	3.941	14.11	46.00	-31.89	3.63	10.48	Average
9	11.002	27.36	60.00	-32.64	16.56	10.80	QP
10	11.002	20.81	50.00	-29.19	10.81	10.80	Average
11	15.356	20.38	60.00	-39.62	9.60	10.78	QP
12	15.356	15.13	50.00	-34.87	4.35	10.78	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_BT3M_2441MHz
test by :Kevin

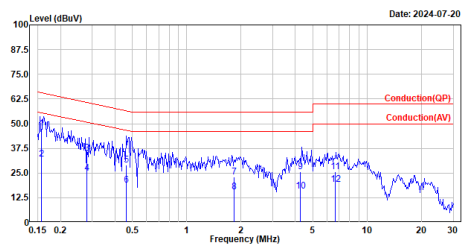


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.157	47.49	65.63	-18.14	37.83	9.66	QP
2	0.157	32.03	55.63	-23.60	22.37	9.66	Average
3	0.281	35.08	60.79	-25.71	25.42	9.66	QP
4	0.281	25.08	50.79	-25.71	15.42	9.66	Average
5	0.465	29.09	56.60	-27.51	19.43	9.66	QP
6	0.465	19.01	46.60	-27.59	9.35	9.66	Average
7	1.829	23.01	56.00	-32.99	13.23	9.78	QP
8	1.829	15.40	46.00	-30.60	5.62	9.78	Average
9	4.272	25.74	56.00	-30.26	15.17	10.57	QP
10	4.272	15.94	46.00	-30.06	5.37	10.57	Average
11	6.639	25.80	60.00	-34.20	14.98	10.82	QP
12	6.639	19.16	50.00	-30.84	8.34	10.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 20dB Bandwidth


Modulation	Frequency (MHz)	Measure Level (kHz)	Limit (kHz)
GFSK	2402	1013	-
	2441	962	-
	2480	956	-
$\pi/4$ DQPSK	2402	1280	-
	2441	1298	-
	2480	1307	-
8DPSK	2402	1295	-
	2441	1292	-
	2480	1295	-

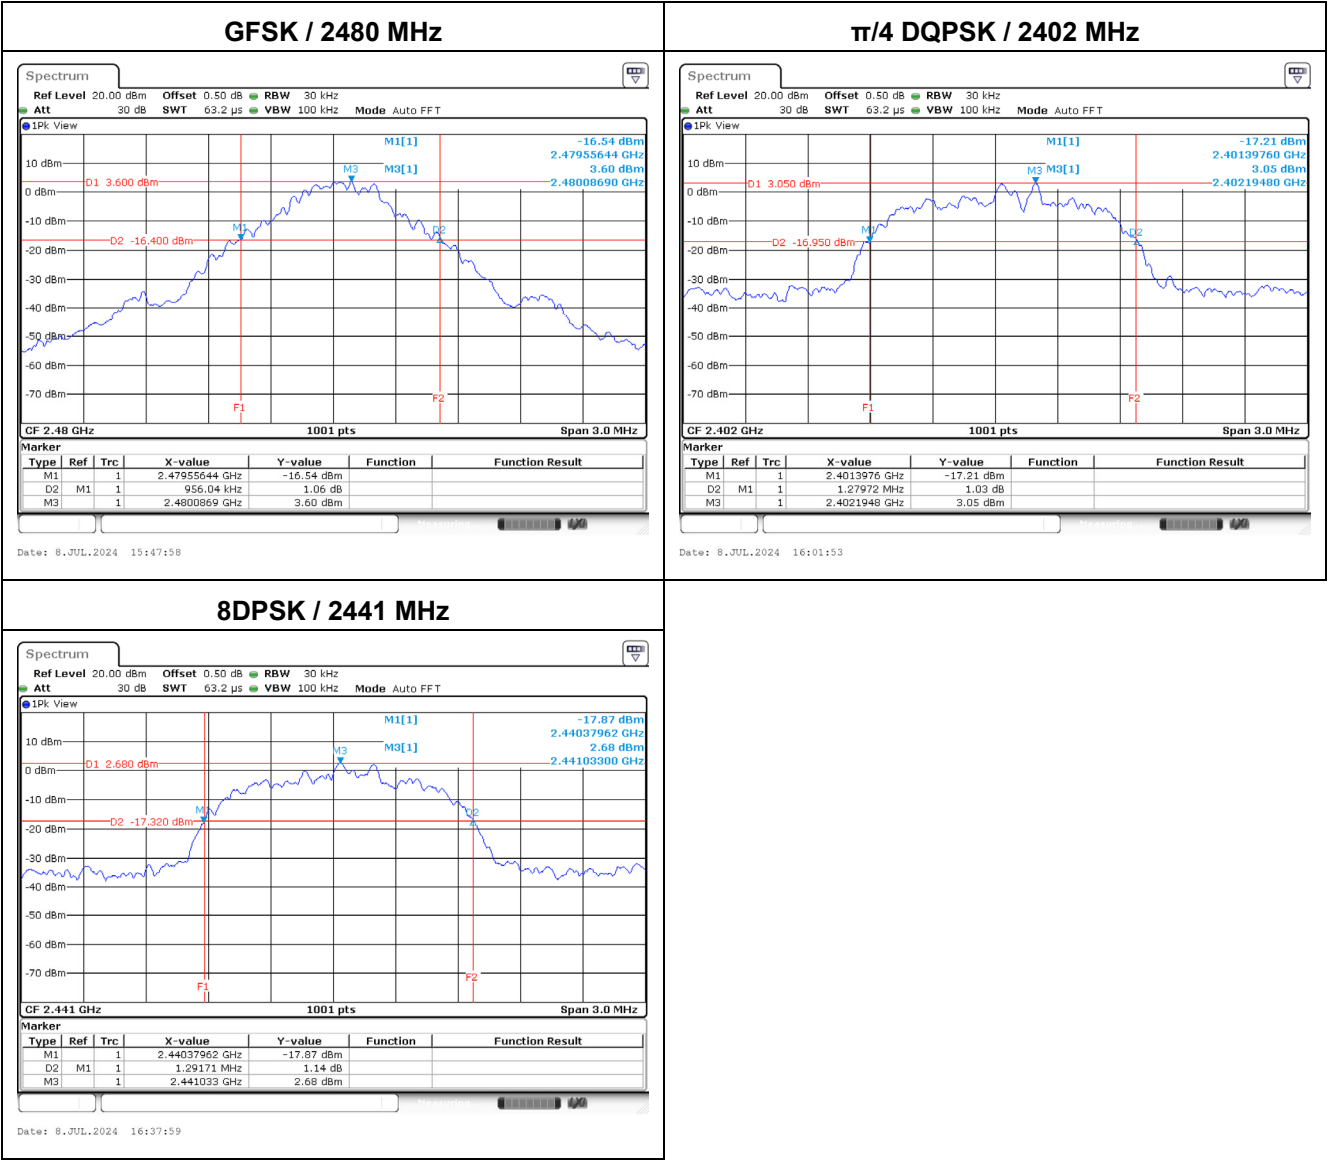


Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
GFSK	2402	1007	>25	675.3	Pass
	2441	1001	>25	641.4	Pass
	2480	1001	>25	637.4	Pass
$\pi/4$ DQPSK	2402	1001	>25	853.1	Pass
	2441	1001	>25	865.1	Pass
	2480	998	>25	871.1	Pass
8DPSK	2402	1001	>25	863.1	Pass
	2441	998	>25	861.1	Pass
	2480	1001	>25	863.1	Pass


GFSK / 2441 MHz

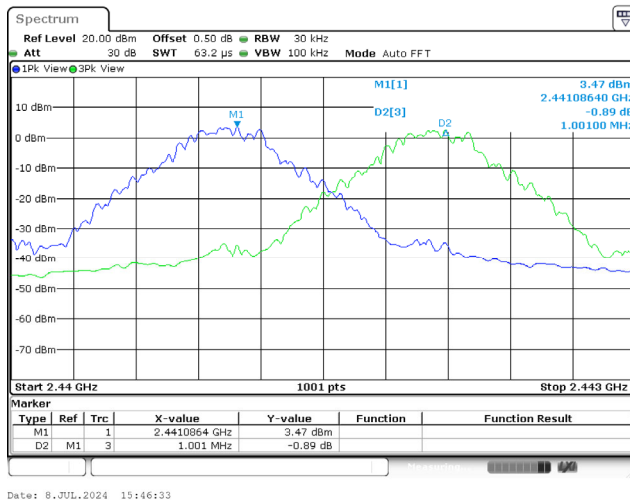

$\pi/4$ DQPSK / 2480 MHz

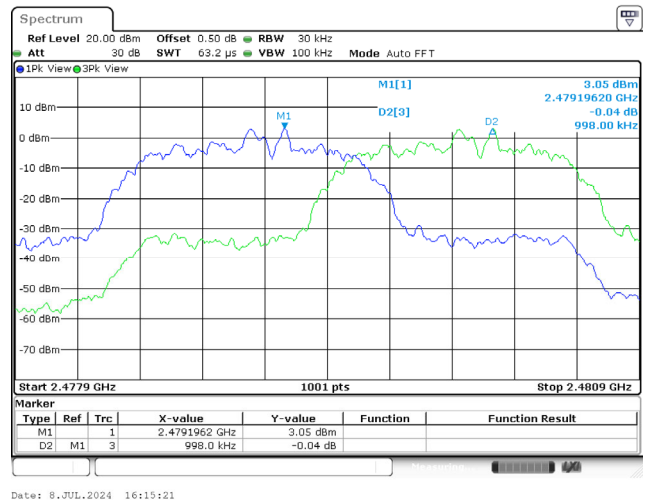

8DPSK / 2441 MHz

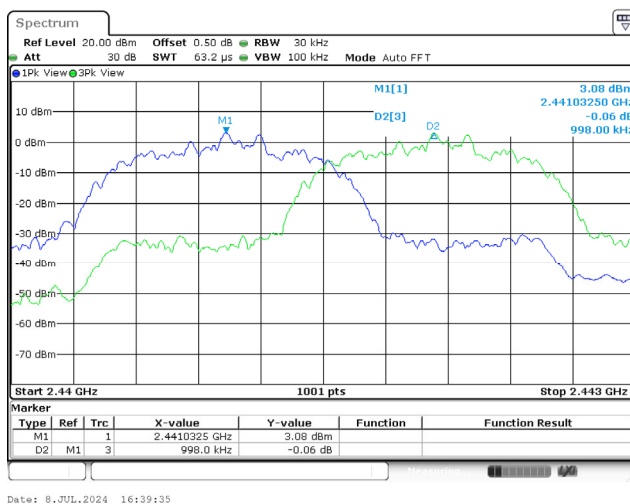



Appendix D. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	6.95	21.00	Pass
	2441	6.81	21.00	Pass
	2480	6.94	21.00	Pass
$\pi/4$ DQPSK	2402	6.89	21.00	Pass
	2441	6.92	21.00	Pass
	2480	6.89	21.00	Pass
8DPSK	2402	6.85	21.00	Pass
	2441	6.92	21.00	Pass
	2480	6.89	21.00	Pass

Appendix E. Test Result of Number of Hopping Frequency

Modulation	Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)	Result
GFSK	2402 ~ 2480	79	≥ 15	Pass
$\pi/4$ DQPSK	2402 ~ 2480	79	≥ 15	Pass
8DPSK	2402 ~ 2480	79	≥ 15	Pass

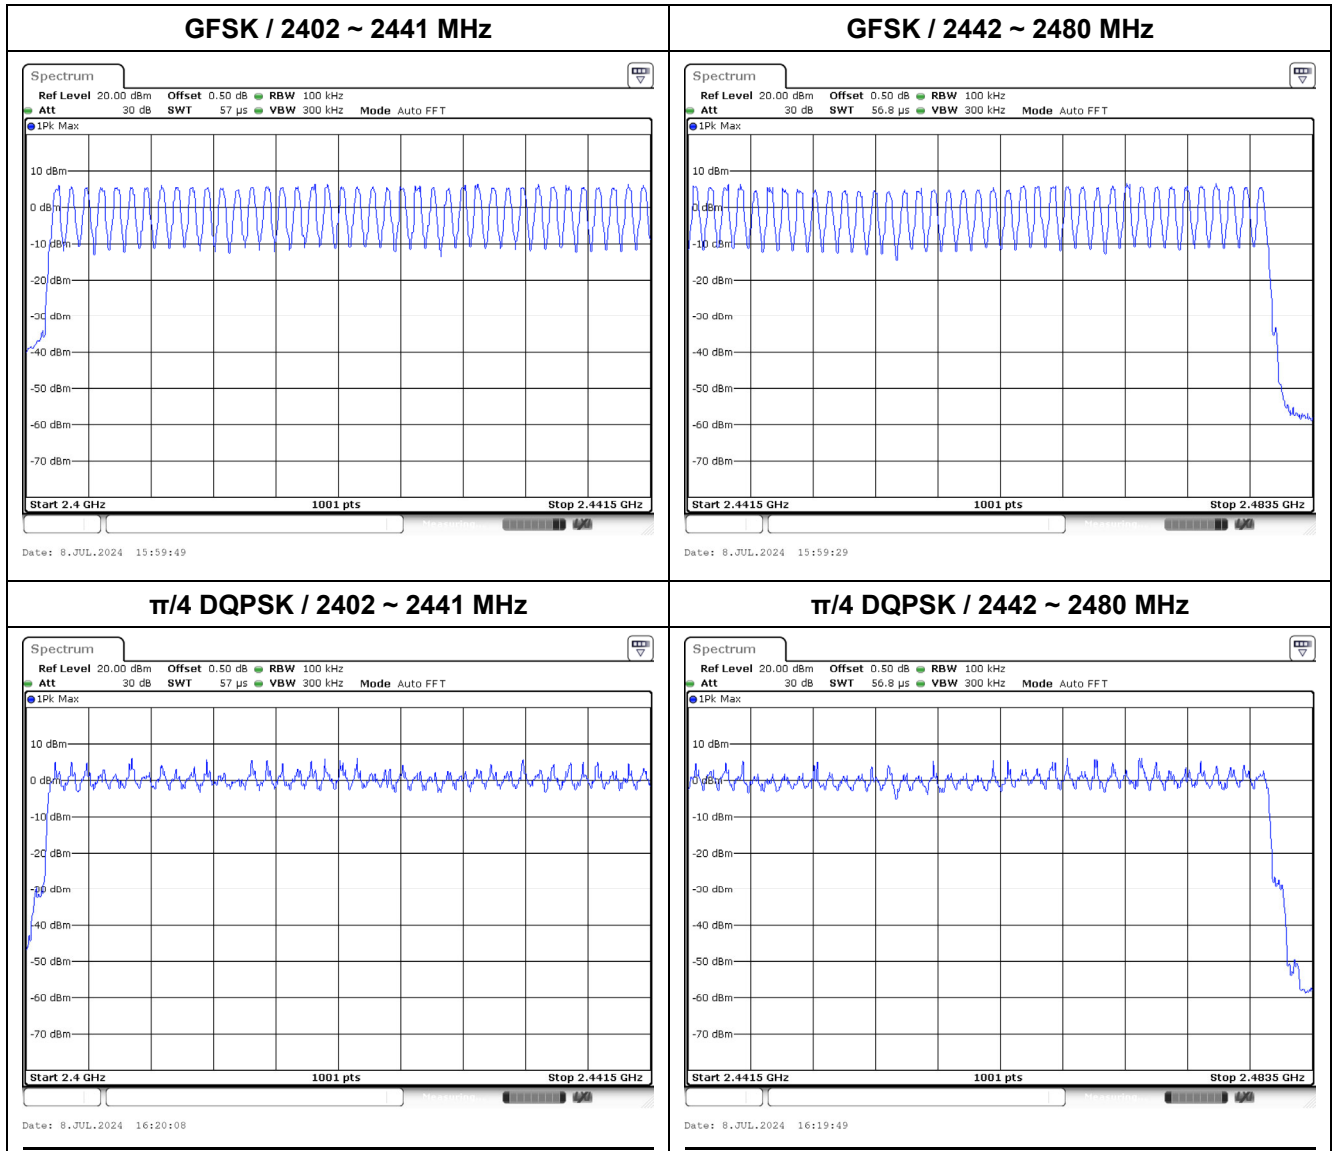

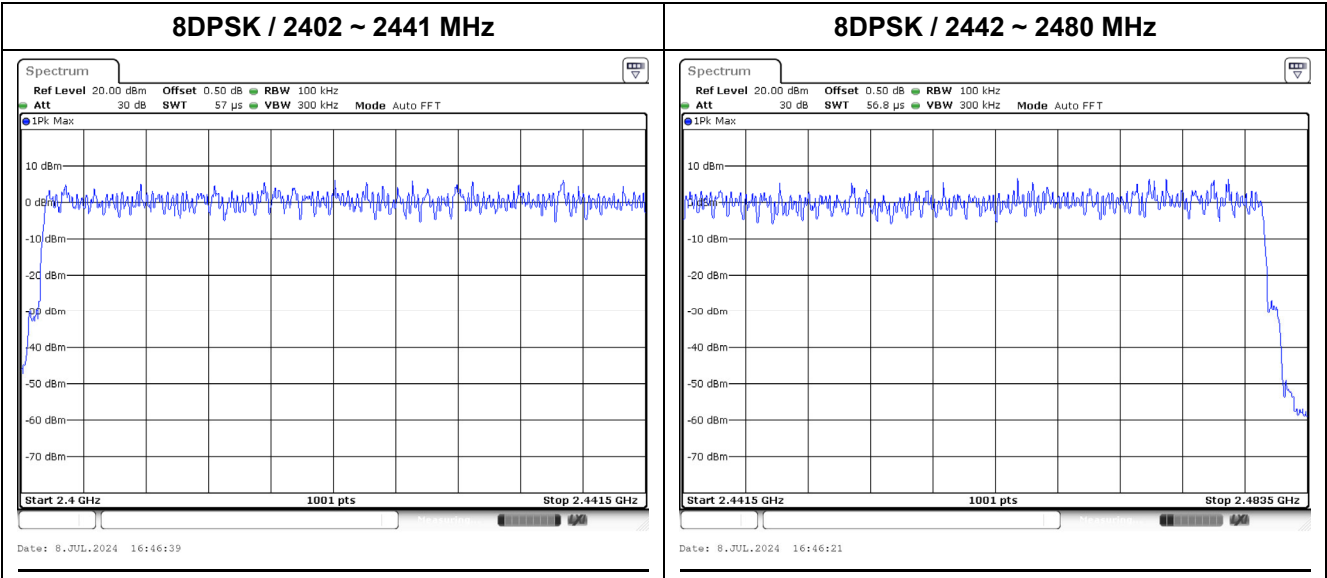


Appendix F. Test Result of Dwell Time


Modulation	Frequency (MHz)	Time slot length (ms)	Period (sec)	Calculation	Dwell Time (ms)	Limit (ms)	Result
GFSK	2402	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
	2441	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
	2480	2.860	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	305.070	400	Pass
$\pi/4$ DQPSK	2402	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
	2441	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
	2480	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
8DPSK	2402	2.860	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	305.070	400	Pass
	2441	2.880	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	307.204	400	Pass
	2480	2.860	31.6	$\text{Time}(\text{sec}) \times (266.67/79) \times 31.6$	305.070	400	Pass

Note: Dwell time = Time slot length * calculation


GFSK / 2402 MHz

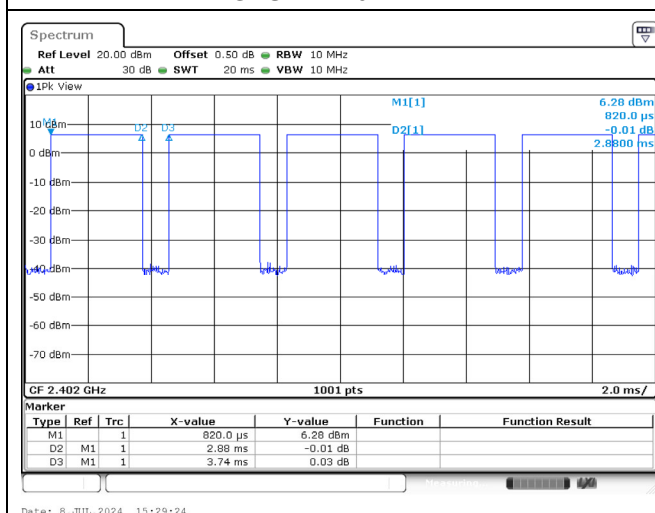


$\pi/4$ DQPSK / 2402 MHz

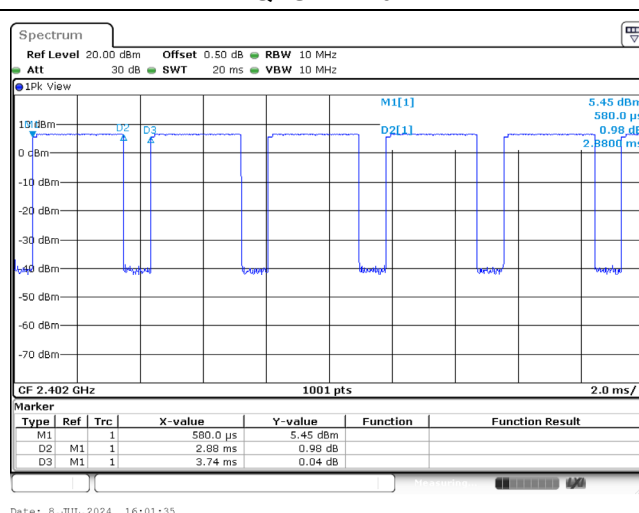

8DPSK / 2441 MHz

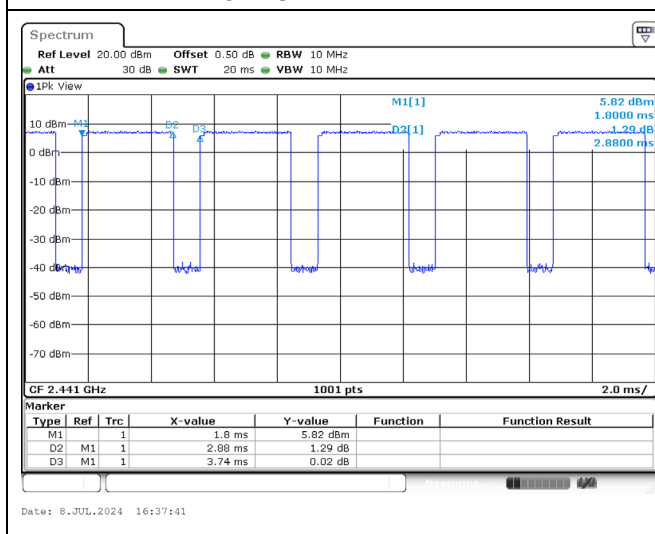



Appendix G. Test Result of Antenna Port Conducted Emission

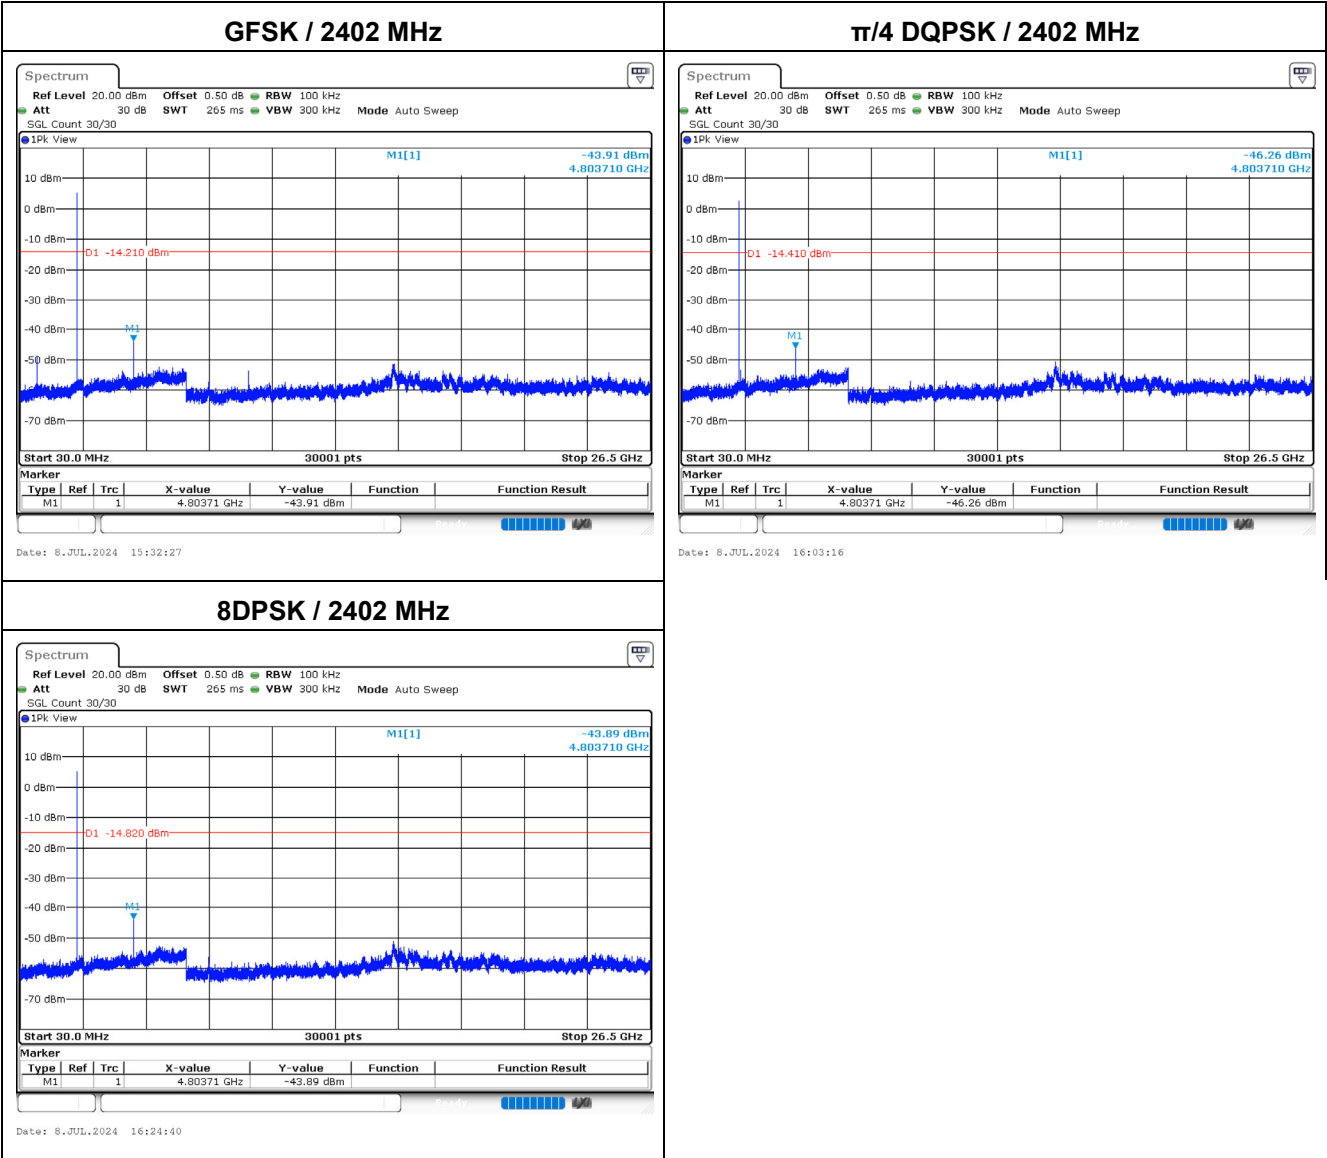

Hopping off




Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
$\pi/4$ DQPSK	> 20	Pass
8DPSK	> 20	Pass

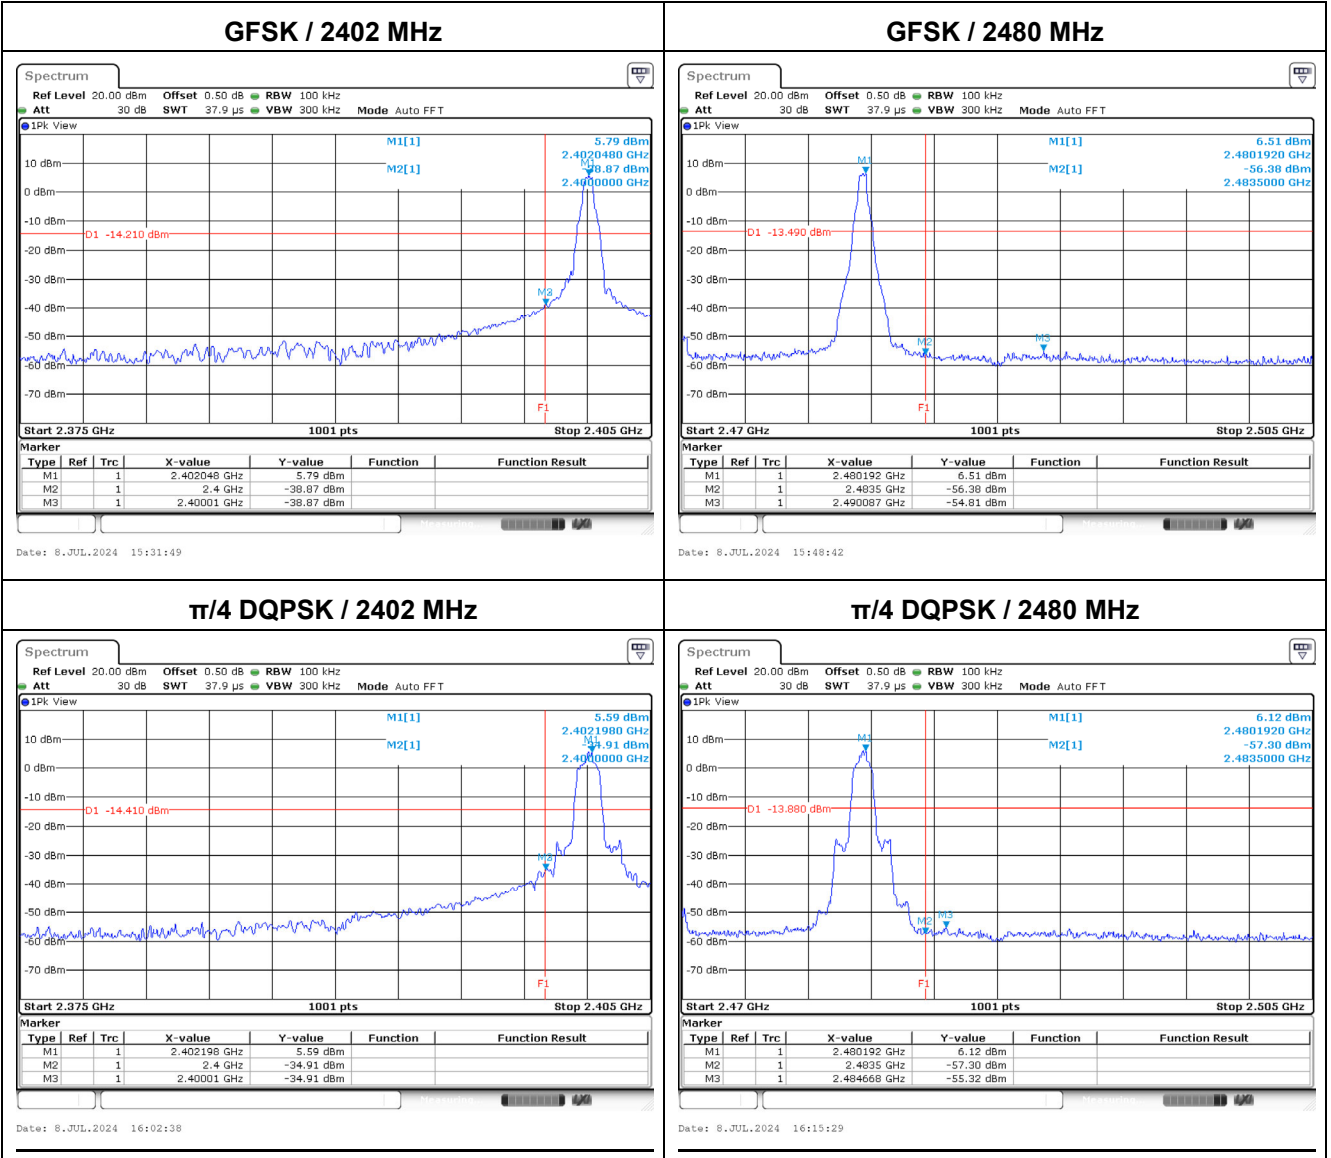

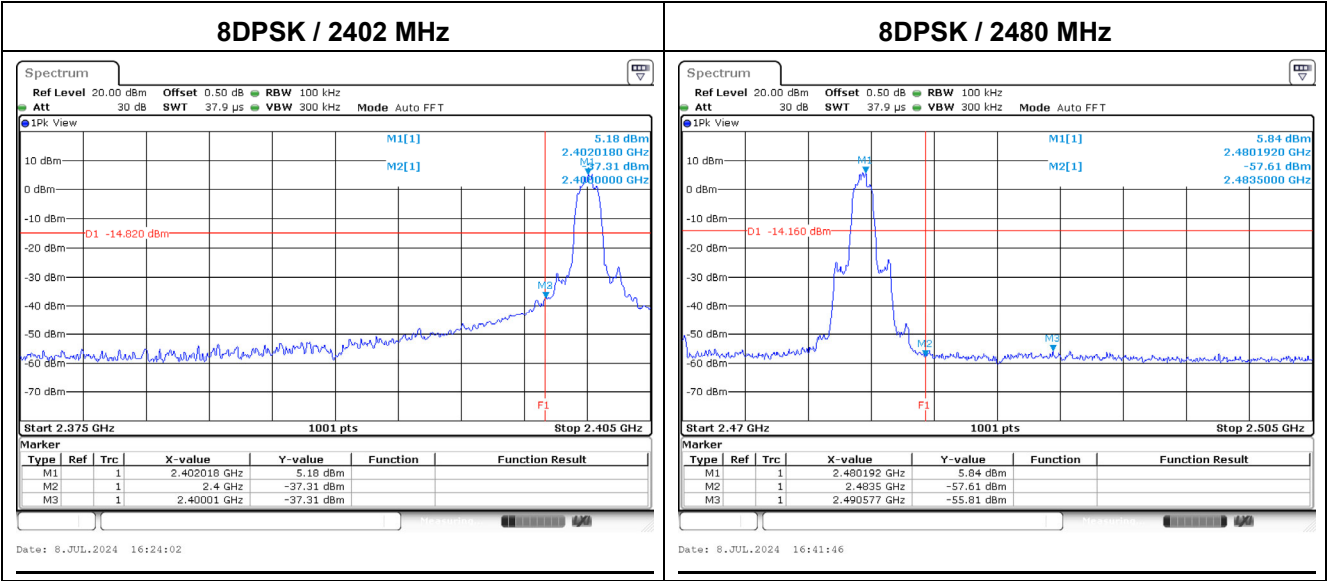

Hopping on

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
$\pi/4$ DQPSK	> 20	Pass
8DPSK	> 20	Pass

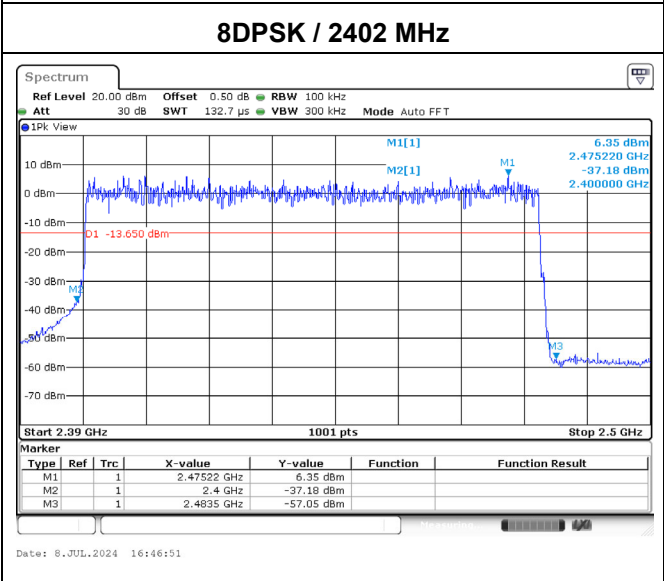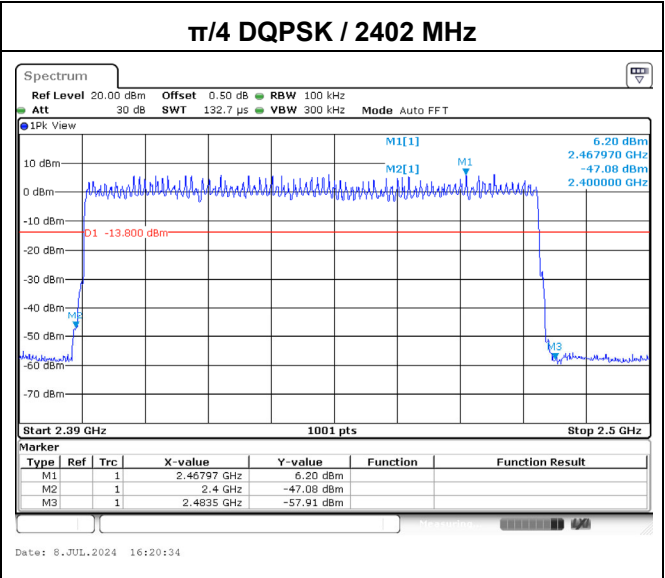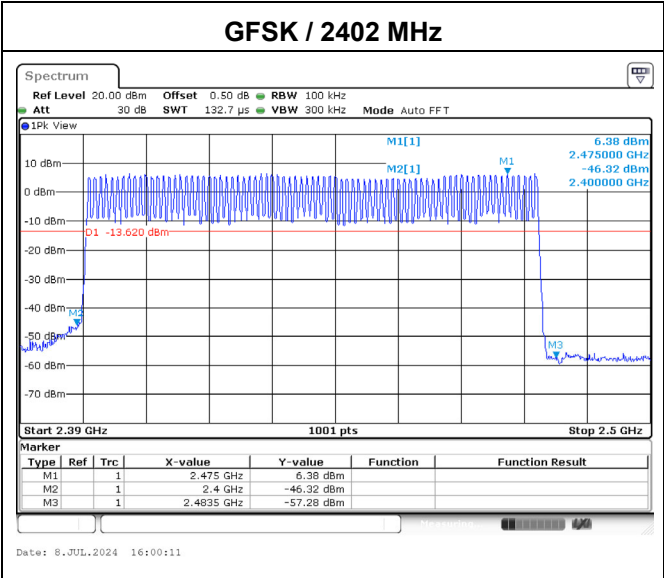

Appendix H. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2402MHz
Test by :Nova

Level (dBuV/m)

Date: 2024-07-12

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	47.17	74.00	-26.83	54.31	-7.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2402MHz
Test by :Nova

Level (dBuV/m)

Date: 2024-07-12

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	48.36	74.00	-25.64	55.50	-7.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2441MHz
Test by :Nova

Level (dBuV/m)

Date: 2024-07-12

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	47.08	74.00	-26.92	53.88	-6.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2441MHz
Test by :Nova


Level (dBuV/m)

Date: 2024-07-12

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	47.80	74.00	-26.20	54.60	-6.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2480MHz
Test by :Nova

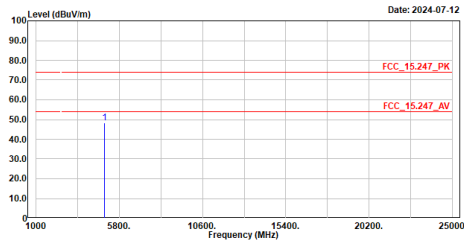

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2480MHz
Test by :Nova

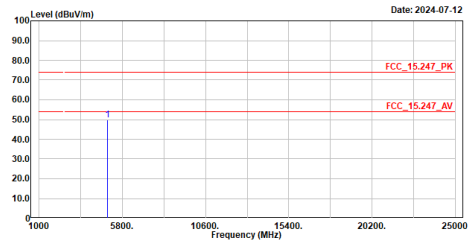

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2402MHz
Test by :Nova

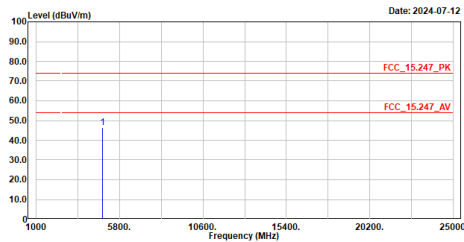

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2402MHz
Test by :Nova

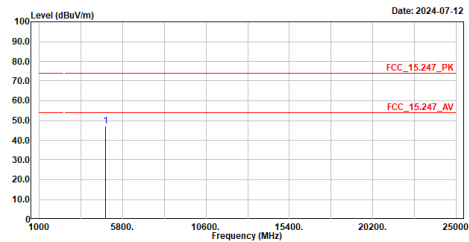

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2441MHz
Test by :Rock

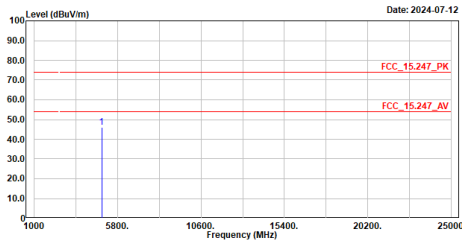

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	45.88	74.00	-28.12	52.68	-6.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2441MHz
Test by :Rock

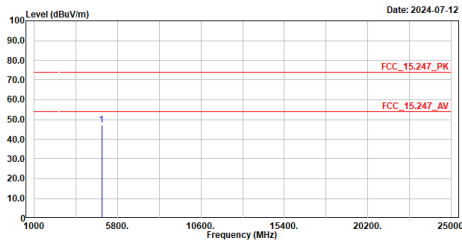

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	47.10	74.00	-26.90	53.90	-6.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT2M_2480MHz
Test by :Rock

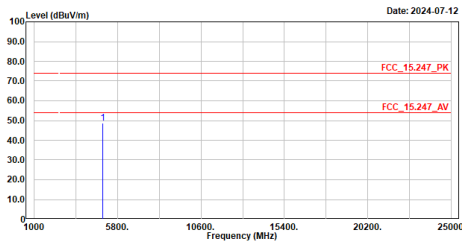

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	48.68	74.00	-25.32	55.19	-6.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT2M_2480MHz
Test by :Rock

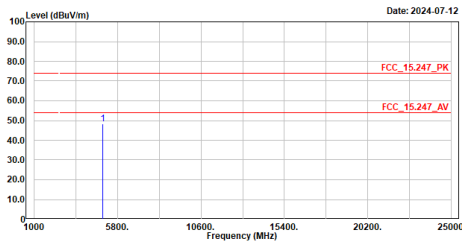

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	48.39	74.00	-25.61	54.90	-6.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2402MHz
Test by :Rock

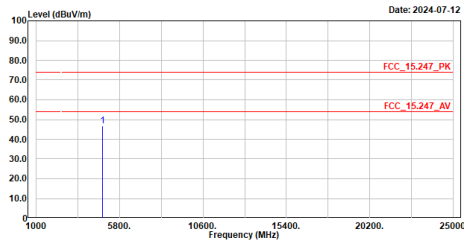

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2402MHz
Test by :Rock

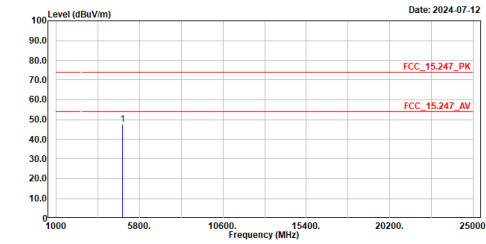

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Rock

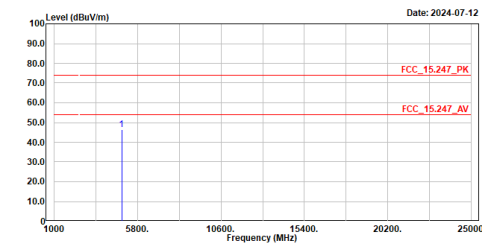

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Rock

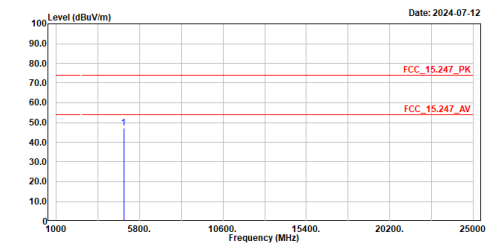

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2480MHz
Test by :Rock

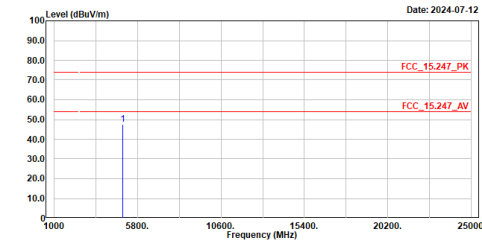


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	47.41	74.00	-26.59	53.92	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2480MHz
Test by :Rock

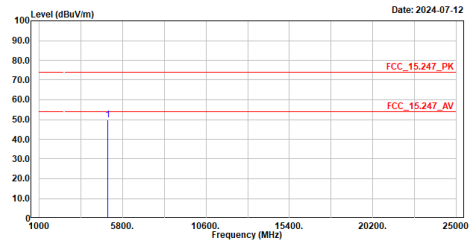


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.78	74.00	-24.22	56.29	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Rock

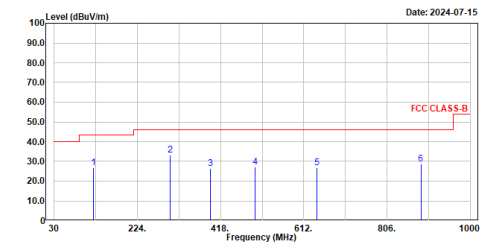


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	122.150	26.67	43.50	-16.83	52.33	-25.66	QP
2	300.339	33.13	46.00	-12.87	55.77	-22.64	QP
3	395.011	26.53	46.00	-19.47	46.45	-19.92	QP
4	497.831	27.17	46.00	-18.83	44.81	-17.64	QP
5	642.458	26.94	46.00	-19.06	41.53	-14.59	QP
6	884.861	28.63	46.00	-17.37	39.92	-11.29	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 300MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Rock

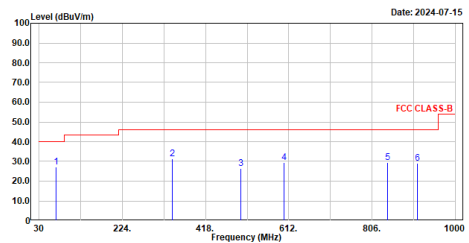


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	70.449	27.32	40.00	-12.68	53.52	-26.20	QP
2	341.176	31.47	46.00	-14.53	52.99	-21.52	QP
3	499.868	26.43	46.00	-19.57	44.02	-17.59	QP
4	600.166	29.40	46.00	-16.60	44.38	-14.98	QP
5	842.472	29.34	46.00	-16.66	40.92	-11.58	QP
6	911.827	29.22	46.00	-16.78	40.02	-10.80	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 300MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT1M_2402MHz
 Test by :Rock

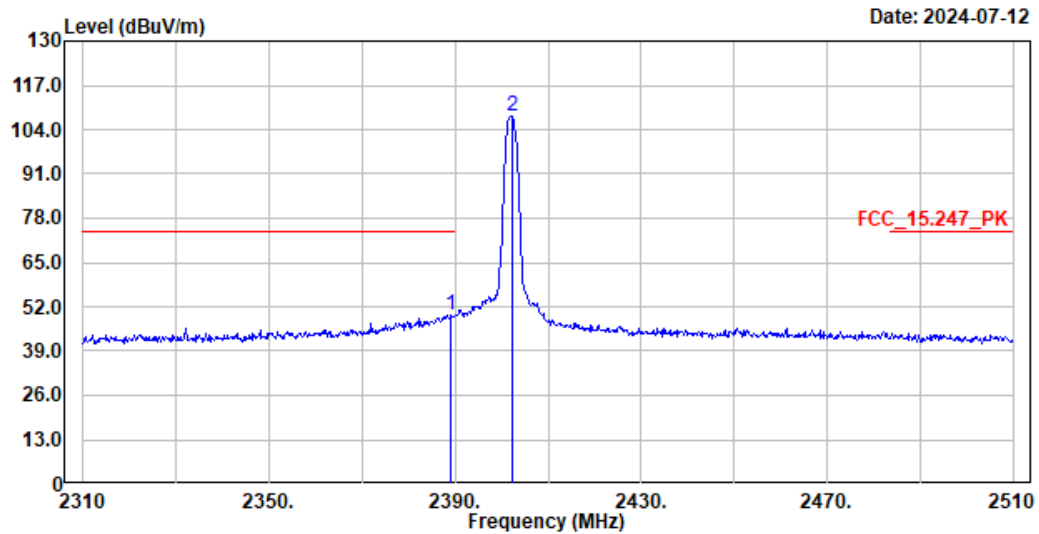

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	49.55	74.00	-24.45	43.46	6.09	Peak
2	2402.200	107.88	-----	-----	101.88	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.2	49.55	-24.731	24.819	-29.181	54.000
2402.2	107.88	-24.731	83.149	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT1M_2402MHz
 Test by :Rock

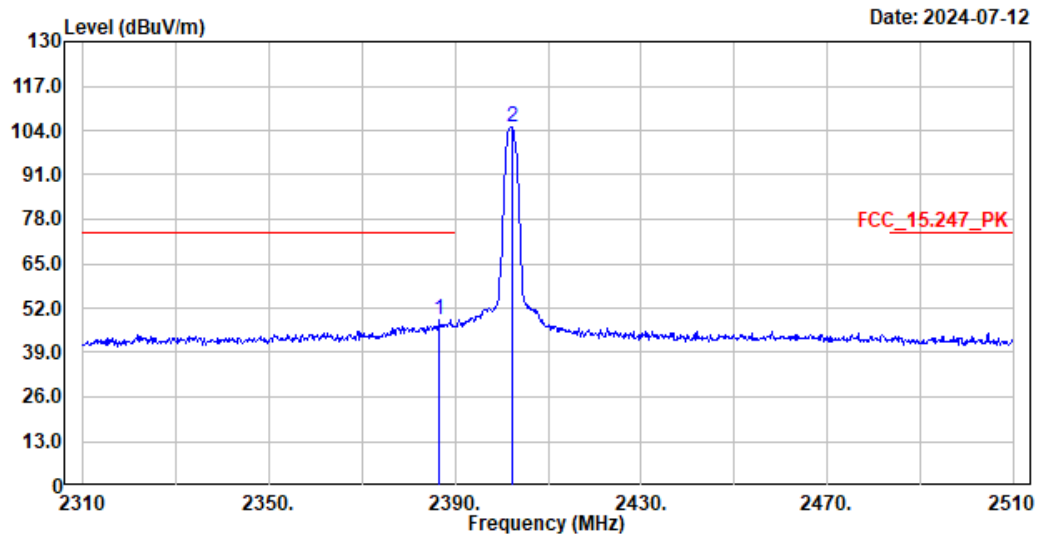

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.600	48.75	74.00	-25.25	42.66	6.09	Peak
2	2402.200	104.94	-----	-----	98.94	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2386.6	48.75	-24.731	24.019	-29.981	54.000
2402.2	104.94	-24.731	80.209	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT1M_2480MHz
 Test by :Nova

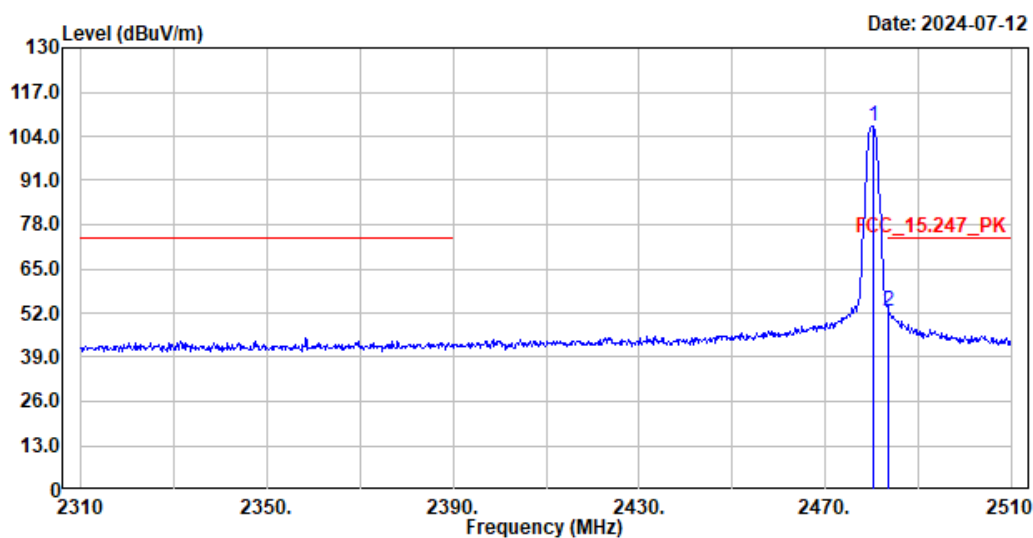

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	106.73	-----	-----	100.79	5.94	Peak
2	2483.600	52.65	74.00	-21.35	46.67	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamplifier Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	106.73	-24.731	81.999	--	--
2483.6	52.65	-24.731	27.919	-26.081	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT1M_2480MHz
 Test by :Nova

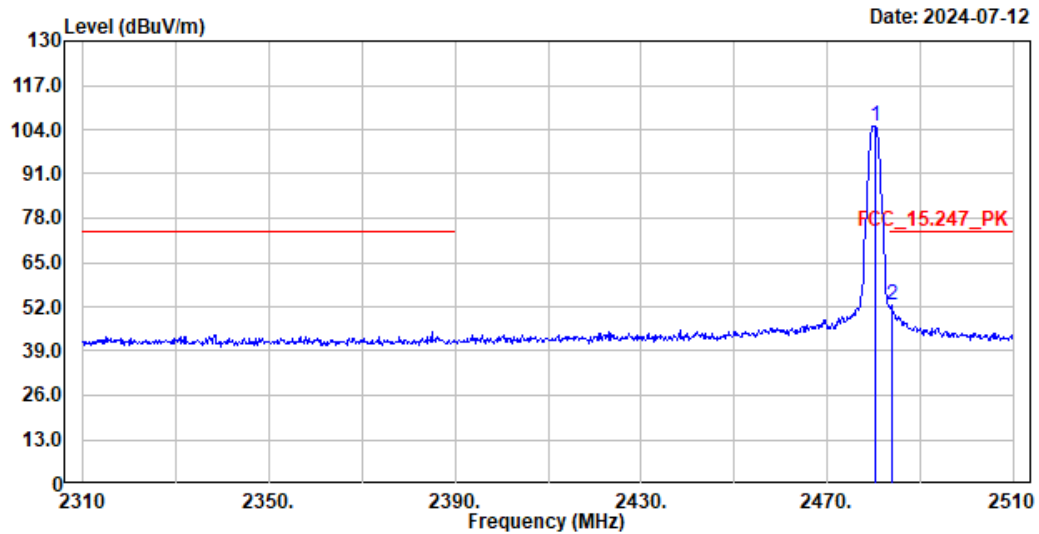

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.01	-----	-----	99.07	5.94	Peak
2	2483.800	52.68	74.00	-21.32	46.70	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
2480.2	105.01	-24.731	80.279	--	--
2483.8	52.68	-24.731	27.949	-26.051	54.000

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT2M_2402MHz
 Test by :Rock

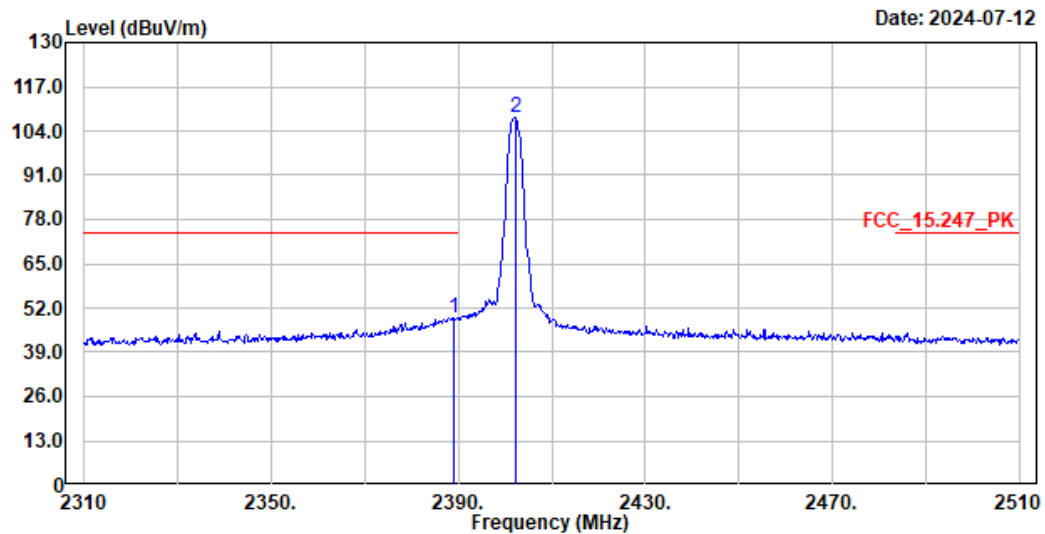

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	49.30	74.00	-24.70	43.21	6.09	Peak
2	2402.200	107.89	-----	-----	101.89	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.2	49.30	-24.731	24.569	-29.431	54.000
2402.2	107.89	-24.731	83.159	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT2M_2402MHz
 Test by :Rock

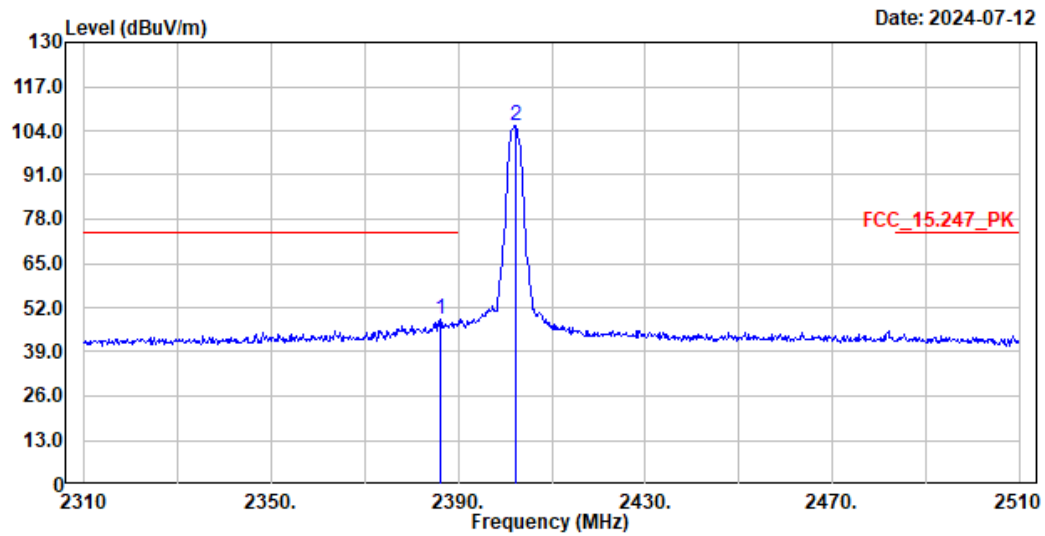

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2386.200	48.61	74.00	-25.39	42.53	6.08	Peak
2	2402.200	105.34	-----	-----	99.34	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2386.2	48.61	-24.731	23.879	-30.121	54.000
2402.2	105.34	-24.731	80.609	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT2M_2480MHz
 Test by :Nova

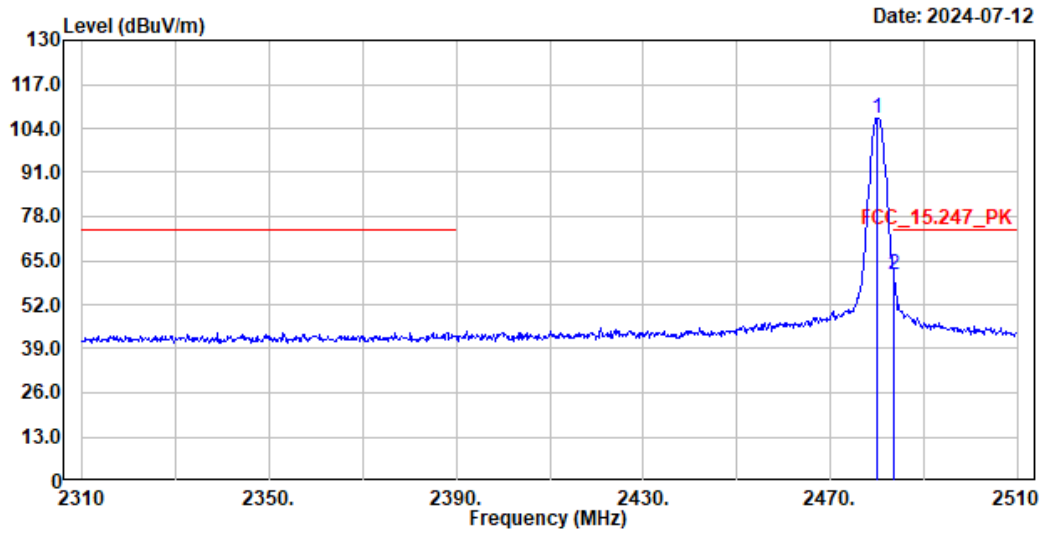

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	106.98	-----	-----	101.04	5.94	Peak
2	2483.600	60.94	74.00	-13.06	54.96	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480	106.98	-24.731	82.249	--	--
2483.6	60.94	-24.731	36.209	-17.791	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT2M_2480MHz
 Test by :Nova

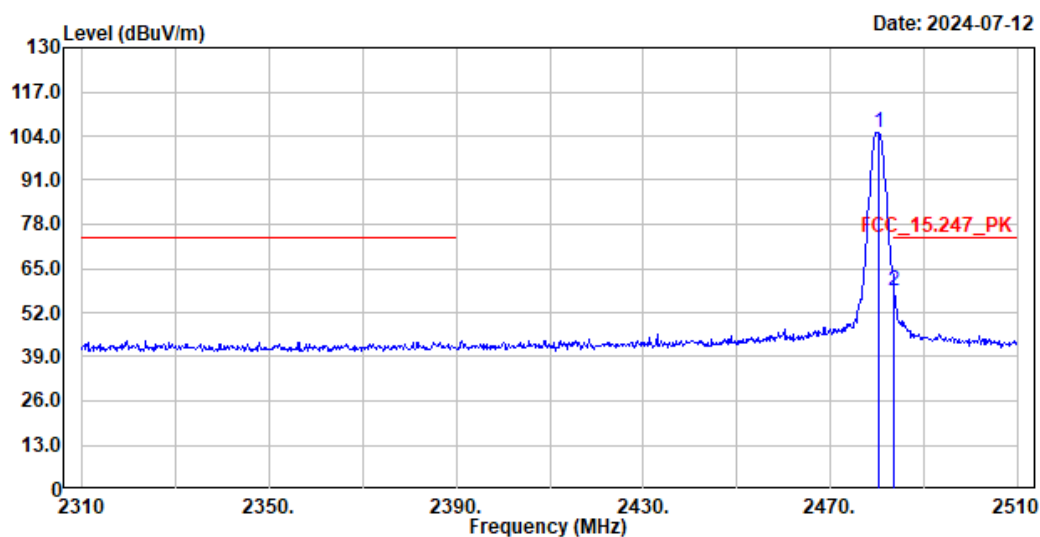

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.17	-----	-----	99.23	5.94	Peak
2	2483.600	58.25	74.00	-15.75	52.27	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	105.17	-24.731	80.439	--	--
2483.6	58.25	-24.731	33.519	-20.481	54.000

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2402MHz
Test by :Rock

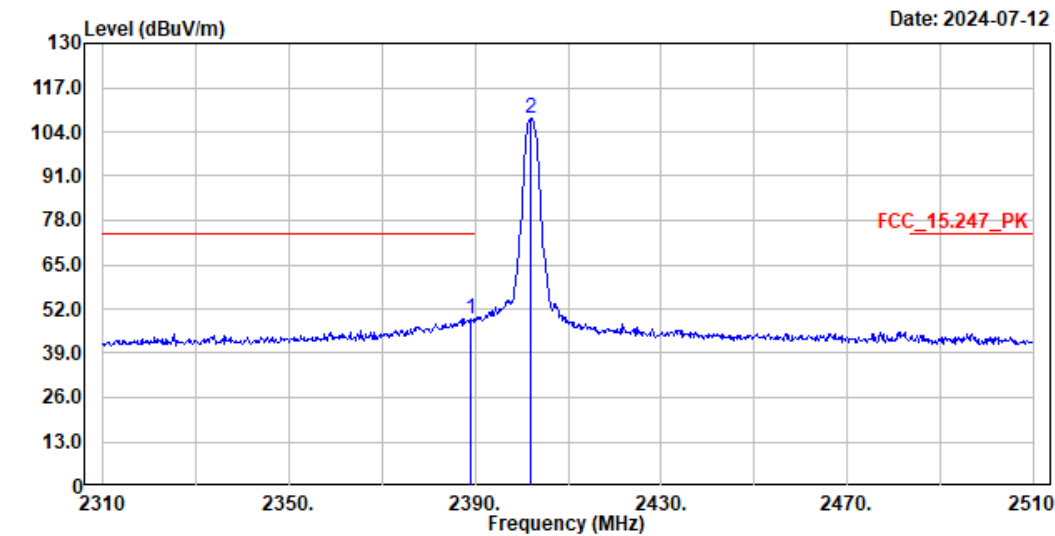

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	49.22	74.00	-24.78	43.13	6.09	Peak
2	2402.000	108.06	-----	-----	102.06	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.2	49.22	-24.731	24.489	-29.511	54.000
2402	108.06	-24.731	83.329	--	--

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT3M_2402MHz
 Test by :Rock

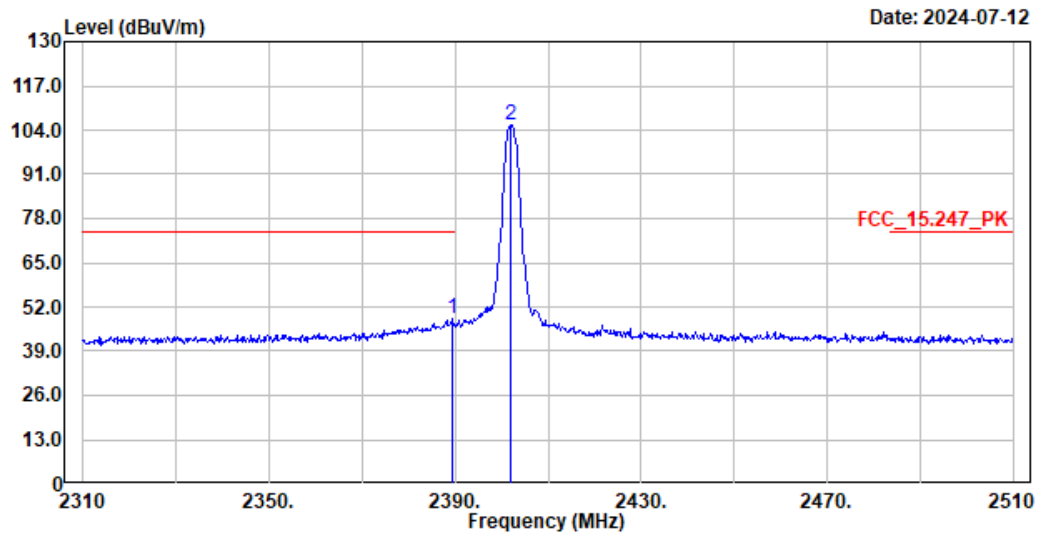

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	48.61	74.00	-25.39	42.52	6.09	Peak
2	2402.000	105.51	-----	-----	99.51	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.4	48.61	-24.731	23.879	-30.121	54.000
2402	105.51	-24.731	80.779	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT3M_2480MHz
 Test by :Nova

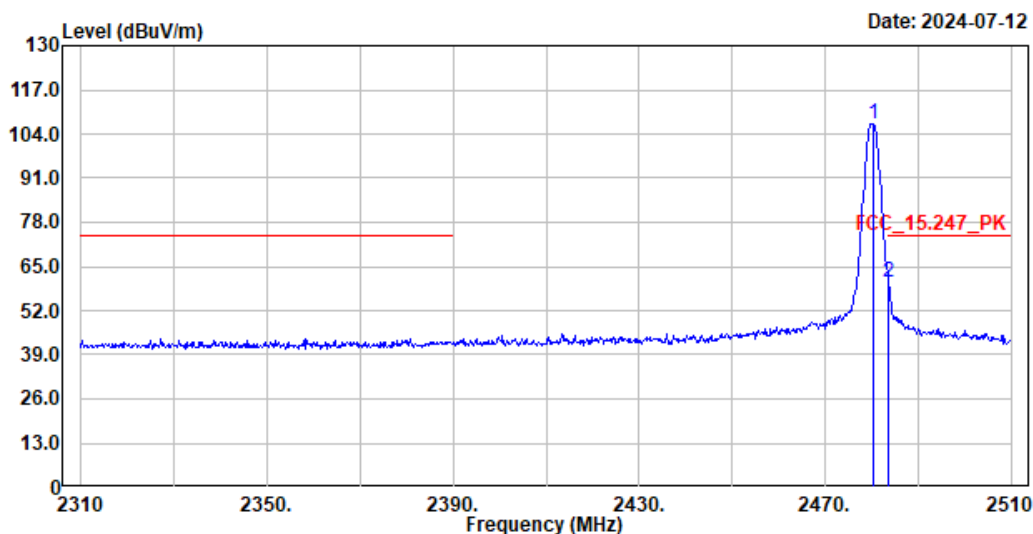

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.200	107.14	-----	-----	101.20	5.94	Peak
2	2483.600	60.17	74.00	-13.83	54.19	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	107.14	-24.731	82.409	--	--
2483.6	60.17	-24.731	35.439	-18.561	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT3M_2480MHz
 Test by :Nova

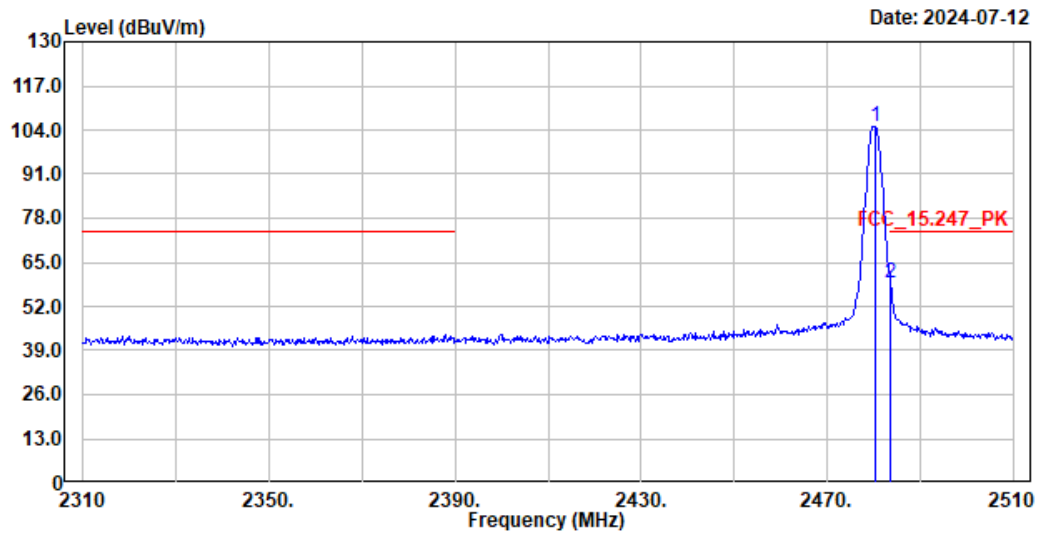

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	105.18	-----	-----	99.24	5.94	Peak
2	2483.600	58.99	74.00	-15.01	53.01	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	105.18	-24.731	80.449	--	--
2483.6	58.99	-24.731	34.259	-19.741	54.000