



Product specification

Part name	35MM WIRE	Unit		edition	A1	Document number	
Bark; epidermis	PE	Core material	Copper wire	Third angle hair		page	Total 1 page
color	White	establishment	Yan Qingmin	to examine	Yan Qingmin	approve	Yan Qingmin
Production Department	engineering department		date	2025-03-21	date	20250321	
order	project	Testing standards	test method	order	project	Testing standards	Testing tools
1	appearance	See sample	generic standard	2	colour	white	calipers
3	size	See the figure below		4	pulling		
5		quality testing	张志强	6	other		

Manufacturer: Chuangsheng Wire Rod
Production address: Pumei Xinxiang, Chenghai District, Shantou City, Guangdong Province

PVC wire 17 cores -0.11-1.6-35mm white, single-sided 3mm dial, environmentally friendly



- notes:
- 1. Material; PVC/Copper
 - 2. Surface treatment
 - 3. There should be no burrs or scratches on the surface
 - 4. No tolerance dimension specified+-0.5mm

张志强

深圳市利信辉电子有限公司

Shenzhen Lixinhui Electronics Co., Ltd

深圳市宝安区新安街道兴东社区 71 区宗泰绿凯智荟园

Zongtai Green Kaizhi Hui Yuan, Xingdong Community, 71 District,Xin'an Street, Bao'an District, Shenzhen City

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0.17DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.6 19P 白色

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions

1. Network Analyzers :

Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C

张小强

3. 3D Chamber Test System


Efficiency & Gain


Efficiency & Gain

2400-2500

张小强

Radiation Pattern:

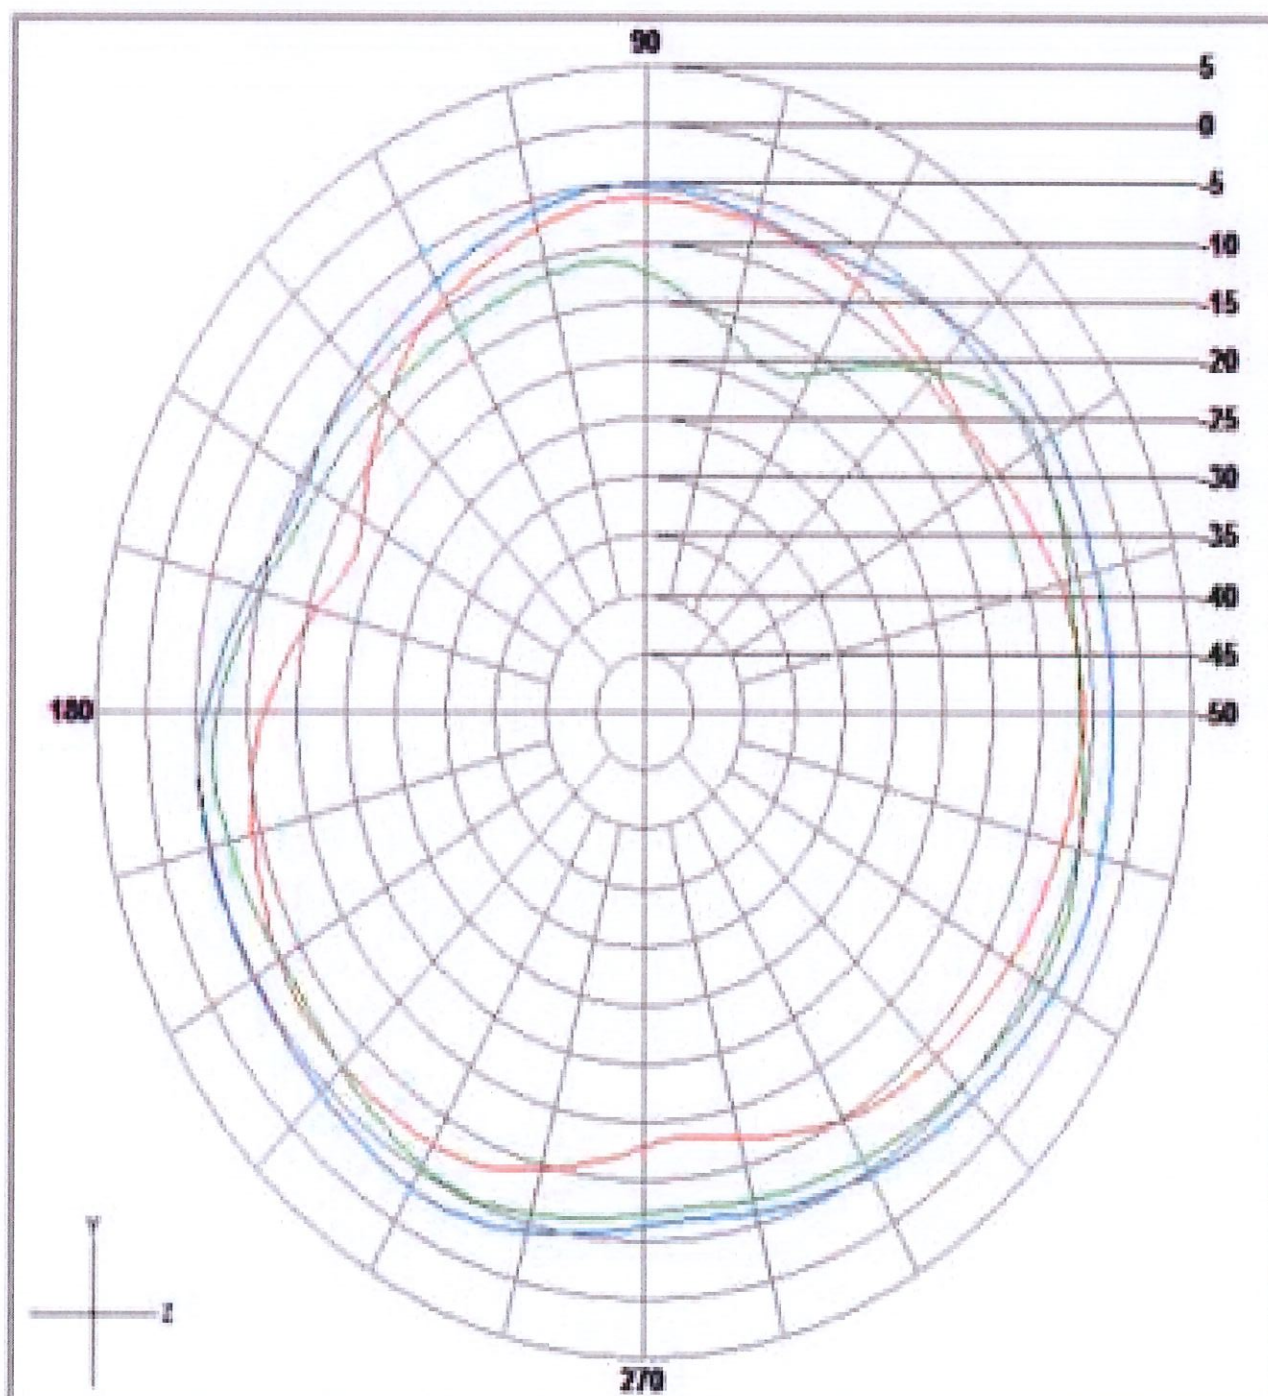

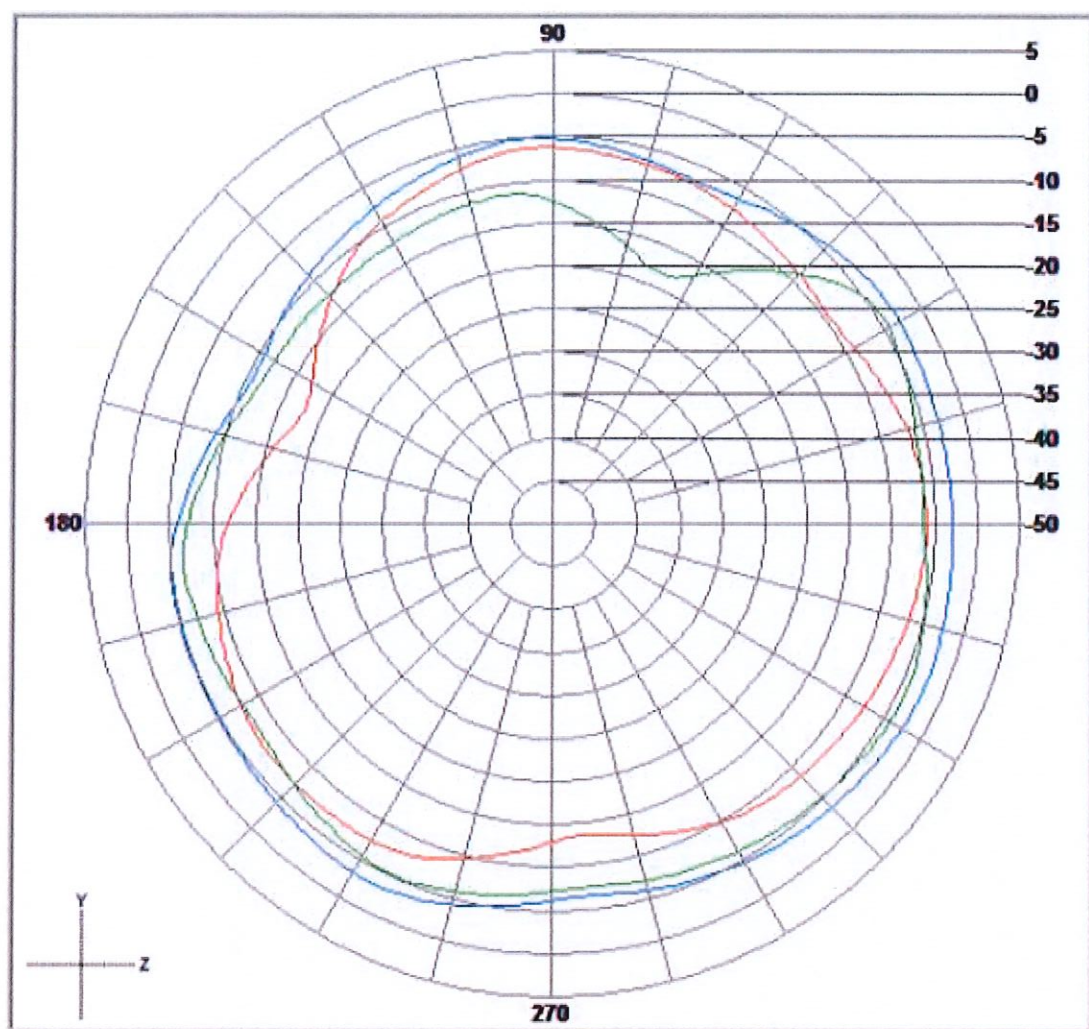

张小强