




FCC Radio Test Report


FCC ID: G95EGA228

This report concerns: Original Grant

Project No. : 2401C198D
Equipment : Dual Band WiFi 7 Fiber Gateway
Brand Name : Vantiva
Test Model : FGA228BPLT
Series Model : EGA228BVBV5, EGA228BSAS
Applicant : Vantiva USA LLC
Address : 4855 Peachtree Industrial Blvd, Suite 200 Norcross, GA 30092 U.S.A
Manufacturer : Vantiva USA LLC
Address : 4855 Peachtree Industrial Blvd, Suite 200 Norcross, GA 30092 U.S.A
Factory : FUYU PRECISION COMPONENT CO.,LTD.
Address : Lot M1, Lot F and Lot T1, Quang Chau Industrial Zone, Van Trung Ward, Viet Yen Town, Bac Giang Province, Viet Nam
Date of Receipt : Oct. 21, 2024
Date of Test : Oct. 23, 2024 ~ Mar. 11, 2025
Issued Date : Apr. 09, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG20241021284 for conducted, DG20241021283 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by : 
 Antony Liang

Approved by : 
 Chay Cai

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	18
3.4 DUTY CYCLE	23
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	26
3.6 SUPPORT UNITS	26
3.7 CUSTOMER INFORMATION DESCRIPTION	26
4 . AC POWER LINE CONDUCTED EMISSIONS	27
4.1 LIMIT	27
4.2 TEST PROCEDURE	27
4.3 DEVIATION FROM TEST STANDARD	27
4.4 TEST SETUP	28
4.5 EUT OPERATION CONDITIONS	28
4.6 TEST RESULTS	28
5 . RADIATED EMISSIONS	29
5.1 LIMIT	29
5.2 TEST PROCEDURE	30
5.3 DEVIATION FROM TEST STANDARD	31
5.4 TEST SETUP	31
5.5 EUT OPERATION CONDITIONS	33
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	33
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	33
5.8 TEST RESULTS - ABOVE 1000 MHZ	33
6 . BANDWIDTH	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	35
6.5 EUT OPERATION CONDITIONS	35
6.6 TEST RESULTS	35
7 . MAXIMUM OUTPUT POWER	36
7.1 LIMIT	36
7.2 TEST PROCEDURE	36
7.3 DEVIATION FROM STANDARD	36
7.4 TEST SETUP	36
7.5 EUT OPERATION CONDITIONS	36
7.6 TEST RESULTS	36
8 . POWER SPECTRAL DENSITY	37
8.1 LIMIT	37
8.2 TEST PROCEDURE	37
8.3 DEVIATION FROM STANDARD	37
8.4 TEST SETUP	38
8.5 EUT OPERATION CONDITIONS	38
8.6 TEST RESULTS	38
9 . FREQUENCY STABILITY	39
9.1 LIMIT	39
9.2 TEST PROCEDURE	39
9.3 DEVIATION FROM STANDARD	39
9.4 TEST SETUP	39
9.5 EUT OPERATION CONDITIONS	39
9.6 TEST RESULTS	39
10 . MEASUREMENT INSTRUMENTS LIST	40
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	43
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	46
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	51
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	54
APPENDIX E - BANDWIDTH	178
APPENDIX F - MAXIMUM OUTPUT POWER	211
APPENDIX G - POWER SPECTRAL DENSITY	284

Table of Contents	Page
APPENDIX H - FREQUENCY STABILITY	349

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2401C198D	R00	Original Report.	Apr. 09, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☒ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☐ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	52%	AC 120V/60Hz	Hayden Chen	Nov. 26, 2024
Radiated Emissions-9kHz to 30MHz	26°C	47%	AC 120V/60Hz	Hayden Chen	Dec. 03, 2024
Radiated Emissions-30MHz to 1000MHz	22°C	50%	AC 120V/60Hz	Allen Tong	Dec. 11, 2024
Radiated Emissions-Above 1000 MHz	20-22°C	39-50%	AC 120V/60Hz	Allen Tong Calvin Wen	Dec. 06, 2024- Jan. 06, 2025
Bandwidth	24°C	50%	AC 120V/60Hz	Parker Yang	Dec. 10, 2024- Dec. 11, 2024
Maximum Output Power	25°C	55-60%	AC 120V/60Hz	Meers Zhang Andrew Jiang	Nov. 29, 2024- Dec. 19, 2024
Power Spectral Density	24°C	50%	AC 120V/60Hz	Parker Yang	Dec. 10, 2024- Dec. 11, 2024
Frequency Stability	Normal & Extreme	50%	Normal & Extreme	Parker Yang	Dec. 10, 2024- Dec. 11, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Dual Band WiFi 7 Fiber Gateway
Brand Name	Vantiva
Test Model	FGA228BPLT
Series Model	EGA228BVBV5, EGA228BSAS
Model Difference(s)	EGA228BVBV5 has only one less optical port compared to FGA228BPLT, EGA228BSAS and EGA228BVBV5 market purpose only, identical except for model name.
Software Version	R 23.2.a.546
Hardware Version	FGR
Power Source	DC Voltage supplied from AC adapter. Model: ADS-36LE-12 12030EPCU-L
Power Rating	I/P: 100-120V ~ 50/60Hz Max. 0.8A O/P: 12V --- 2.5A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 600 Mbps IEEE 802.11ac: up to 3466.8 Mbps IEEE 802.11ax: up to 4804 Mbps IEEE 802.11be: up to 5764 Mbps
Maximum Output Power UNII-1 Non Beamforming	IEEE 802.11ac(VHT40): 29.85 dBm (0.9661 W)
Maximum Output Power UNII-2A Non Beamforming	IEEE 802.11ax(HE40): 23.97 dBm (0.2495 W)
Maximum Output Power UNII-2C Non Beamforming	IEEE 802.11ac(VHT40): 23.97 dBm (0.2495 W)
Maximum Output Power UNII-3 Non Beamforming	IEEE 802.11ac(VHT40): 29.99 dBm (0.9977 W)
Maximum Output Power UNII-1 Beamforming	IEEE 802.11ac(VHT40): 28.41 dBm (0.6934 W)
Maximum Output Power UNII-2A Beamforming	IEEE 802.11ax(HE40): 22.52 dBm (0.1786 W)
Maximum Output Power UNII-2C Beamforming	IEEE 802.11ax(HE40): 22.51 dBm (0.1782 W)
Maximum Output Power UNII-3 Beamforming	IEEE 802.11ax(HE40): 28.54 dBm (0.7145 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1		NA	PCB	N/A	5.0
2		NA	PCB	N/A	4.6
3		NA	PCB	N/A	4.1
4		NA	PCB	N/A	4.7

Note:

- 1) For CDD: The directional gain is 2.68.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

- 2) For TX BF: The beamforming directional gain is 7.44.

Then, the UNII-1 power limit is $30 - (7.44 - 6) = 28.56$, the UNII-2A, UNII-2C power limit is $23.98 - (7.44 - 6) = 22.54$, the UNII-3 power limit is $30 - (7.44 - 6) = 28.56$.

4. Table for Antenna Configuration:

For Non Beamforming:

Operating Mode	TX Mode	4TX
IEEE 802.11a		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)

For Beamforming:

Operating Mode	TX Mode	4TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155 (UNII-3)
Mode 33	TX AC(VHT40) Mode Channel 151 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 33	TX AC(VHT40) Mode Channel 151 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 33	TX AC(VHT40) Mode Channel 151 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 30	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT40) Mode Channel 151 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is recorded.
- (5) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (6) VHT20/VHT40/VHT80/VHT160 covers HT20/HT40 and EHT20/EHT40/EHT80/EHT160 covers HE20/HE40/HE80/HE160, due to same modulation (in full RU). The power setting for 802.11n HT20/HT40 are the same or lower than 802.11ac VHT20/VHT40/VHT80/VHT160 and 802.11ax HE20/HE40/HE80/HE160 are the same or lower than 802.11be EHT20/EHT40/EHT80/EHT160.
- (7) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (8) IEEE 802.11ax mode only supports full RU, IEEE 802.11be mode supports full RU and channel puncturing. The measurements for RF Output Power are tested, the worst case is full RU and only the worst case is documented for other test items.

3.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	42	43	43
IEEE 802.11ac(VHT20)	42	43	43
IEEE 802.11be(EHT20)	42	43	43
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	41	46	
IEEE 802.11be(EHT40)	39	45	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	39		
IEEE 802.11be(EHT80)	37		

UNII-2A			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	32	31	31
IEEE 802.11ac(VHT20)	32	32	32
IEEE 802.11be(EHT20)	31	31	31
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	34	34	
IEEE 802.11be(EHT40)	35	35	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	34		
IEEE 802.11be(EHT80)	34		

UNII-1+UNII-2A	
Test Software Version	IPOP V4.1
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	33
IEEE 802.11be(EHT160)	35

UNII-2C			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	31	31	31
IEEE 802.11ac(VHT20)	32	32	31
IEEE 802.11be(EHT20)	32	32	31
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	35	35	35
IEEE 802.11be(EHT40)	35	35	35
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	34	34	
IEEE 802.11be(EHT80)	34	34	
Frequency (MHz)	5570		
IEEE 802.11ac(VHT160)	34		
IEEE 802.11be(EHT160)	35		

UNII-3			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	46	46	46
IEEE 802.11ac(VHT20)	46	46	46
IEEE 802.11be(EHT20)	46	46	46
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	46	46	
IEEE 802.11be(EHT40)	46	46	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	46		
IEEE 802.11be(EHT80)	44		

Preamble Puncturing:

Test Software Version	IPOP V4.1				
Frequency (MHz)	5210	5290	5530	5610	5775
IEEE 802.11be(EHT80)_Punctured by 20 MHz x111	17.5	17	16.5	16.5	22
IEEE 802.11be(EHT80)_Punctured by 20MHz 1x11	17.5	17	16.5	16.5	22
IEEE 802.11be(EHT80)_Punctured by 20MHz 111x	17.5	17	16.5	16.5	22
Frequency (MHz)	5250	5570			
IEEE 802.11be(EHT160)_Punctured by 20MHz x11111111	14.5	15			
IEEE 802.11be(EHT160)_Punctured by 20MHz 1x1111111	14.5	15			
IEEE 802.11be(EHT160)_Punctured by 20MHz 11111111x	14.5	15			
IEEE 802.11be(EHT160)_Punctured by 40MHz xx1111111	14	14.5			
IEEE 802.11be(EHT160)_Punctured by 40MHz 11xx11111	14	14.5			
IEEE 802.11be(EHT160)_Punctured by 40MHz 1111111xx	14	14.5			

Beamforming

UNII-1			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5180	5200	5240
IEEE 802.11ac(VHT20)	41	42	42
IEEE 802.11be(EHT20)	41	42	42
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	40	43	
IEEE 802.11be(EHT40)	38	42	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	38		
IEEE 802.11be(EHT80)	37		

UNII-2A			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5260	5300	5320
IEEE 802.11ac(VHT20)	31	31	31
IEEE 802.11be(EHT20)	30	30	30
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	30	31	
IEEE 802.11be(EHT40)	32	32	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	31		
IEEE 802.11be(EHT80)	31		

UNII-1+UNII-2A	
Test Software Version	IPOP V4.1
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	32
IEEE 802.11be(EHT160)	31

UNII-2C			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5500	5580	5700
IEEE 802.11ac(VHT20)	31	31	30
IEEE 802.11be(EHT20)	31	31	30
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	32	32	32
IEEE 802.11be(EHT40)	32	32	32
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	31	31	
IEEE 802.11be(EHT80)	31	31	
Frequency (MHz)	5570		
IEEE 802.11ac(VHT160)	31		
IEEE 802.11be(EHT160)	31		

UNII-3			
Test Software Version	IPOP V4.1		
Frequency (MHz)	5745	5785	5825
IEEE 802.11ac(VHT20)	43	43	43
IEEE 802.11be(EHT20)	43	43	43
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	43	42	
IEEE 802.11be(EHT40)	44	44	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	43		
IEEE 802.11be(EHT80)	43		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

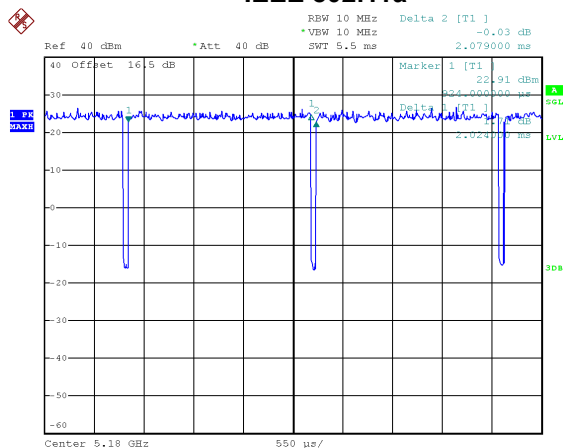

Date: 29.NOV.2024 11:07:17

Duty cycle = 2.024 ms / 2.079 ms = 97.35%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.12$


IEEE 802.11ac(VHT20)

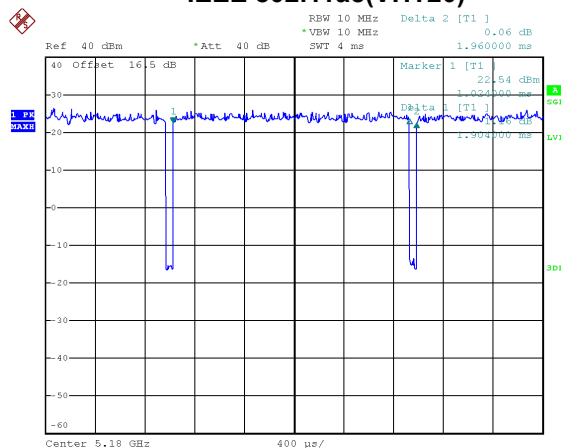

Date: 29.NOV.2024 11:08:02

Duty cycle = 1.904 ms / 1.960 ms = 97.14%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.13$


IEEE 802.11ac(VHT40)

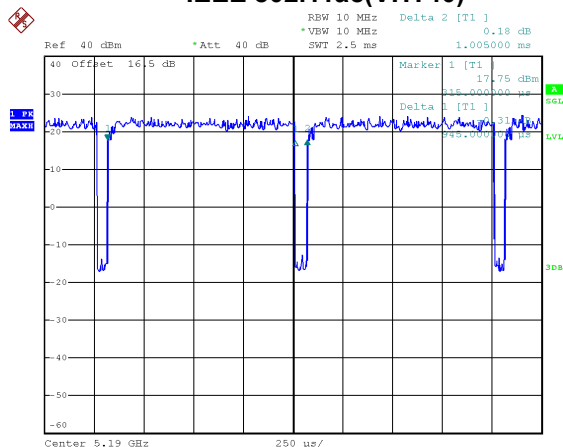

Date: 29.NOV.2024 11:11:29

Duty cycle = 0.945 ms / 1.005 ms = 94.03%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.27$


IEEE 802.11ac(VHT80)

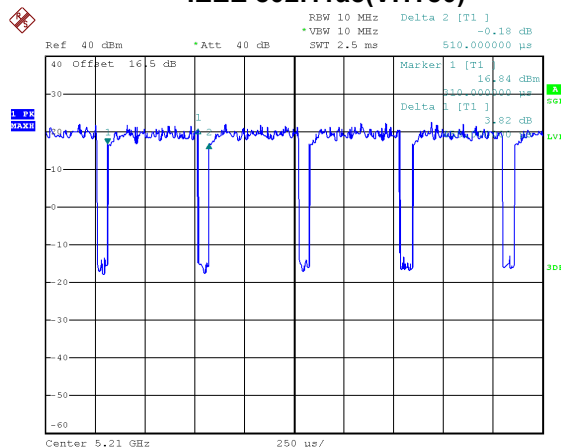

Date: 29.NOV.2024 11:12:12

Duty cycle = 0.455 ms / 0.510 ms = 89.22%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.50$


IEEE 802.11ac(VHT160)

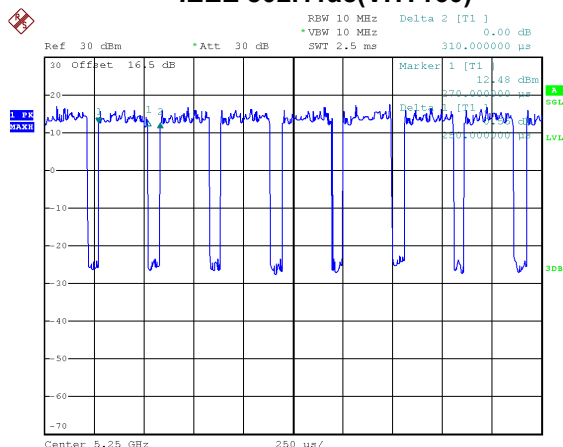

Date: 29.NOV.2024 11:17:58

Duty cycle = 0.250 ms / 0.310 ms = 80.65%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.93$


IEEE 802.11be(EHT20)

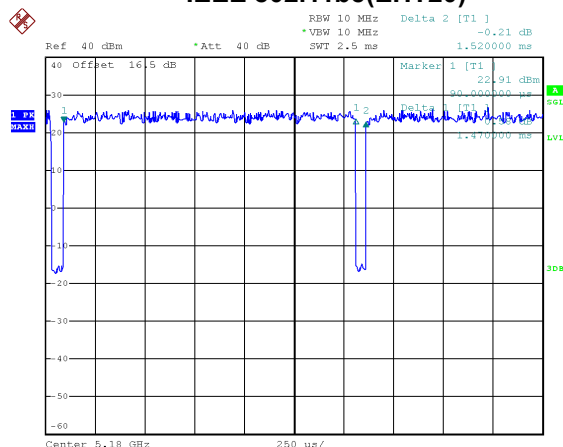

Date: 29.NOV.2024 11:09:00

Duty cycle = 1.470 ms / 1.520 ms = 96.71%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.15$


IEEE 802.11be(EHT40)

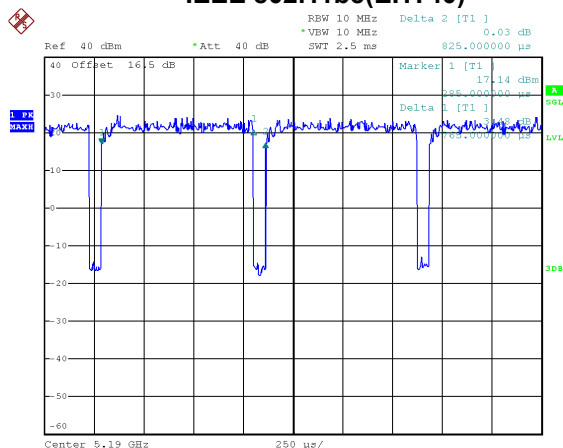

Date: 29.NOV.2024 11:10:20

Duty cycle = 0.765 ms / 0.825 ms = 92.73%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.33$


IEEE 802.11be(EHT80)

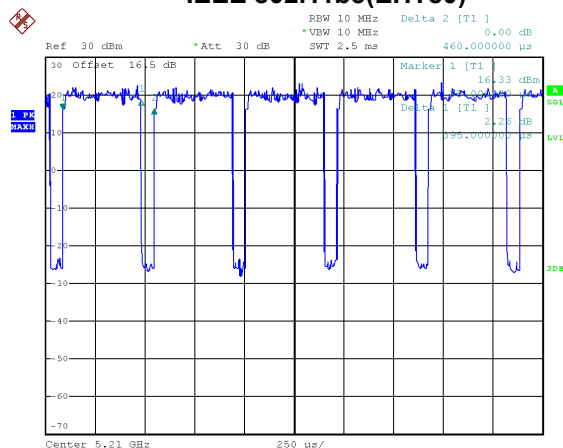

Date: 29.NOV.2024 11:16:34

Duty cycle = 0.395 ms / 0.460 ms = 85.87%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.66$

IEEE 802.11be(EHT160)

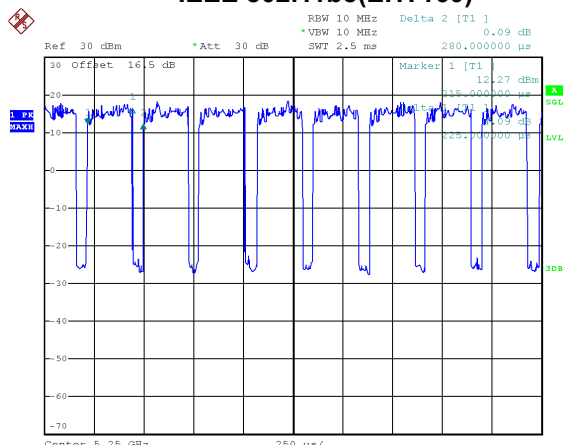

Date: 29.NOV.2024 11:17:07

Duty cycle = 0.225 ms / 0.280 ms = 80.36%
 Duty Factor = 10 log(1 / Duty cycle) = 0.95

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 494 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 525 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1058 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2198 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 4000 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 680 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1307 Hz (Duty cycle < 98%).


For IEEE 802.11be(EHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2532 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 4444 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

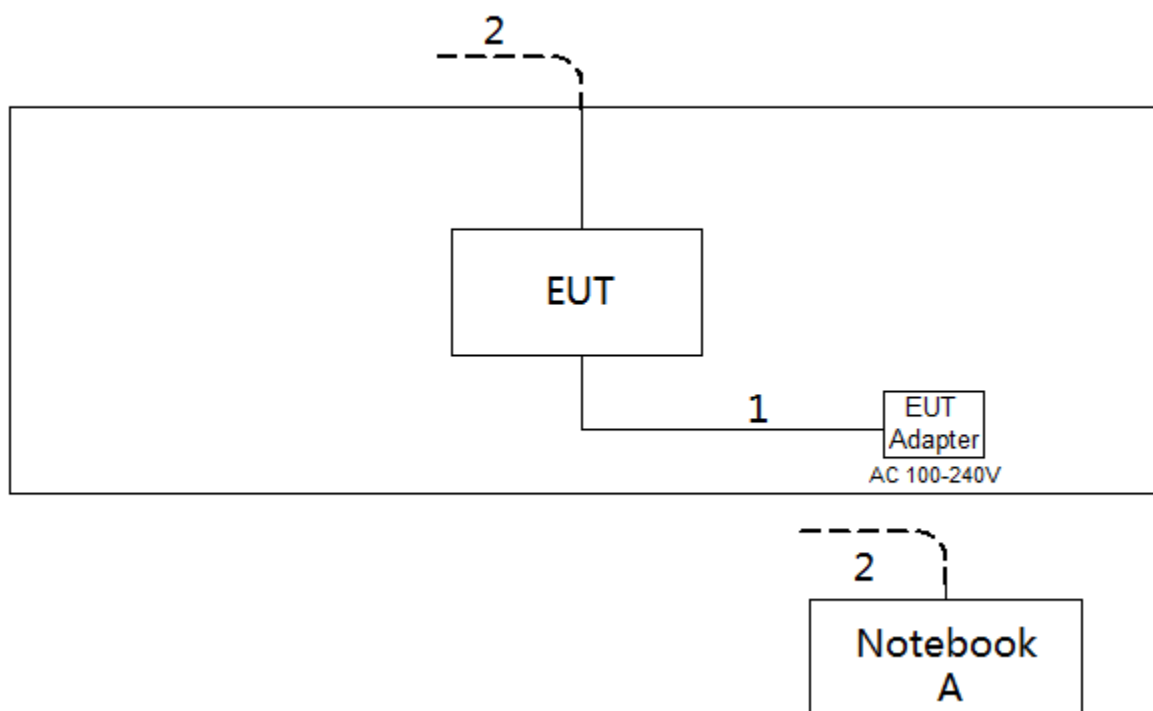

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain, directional gain and beamforming directional gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

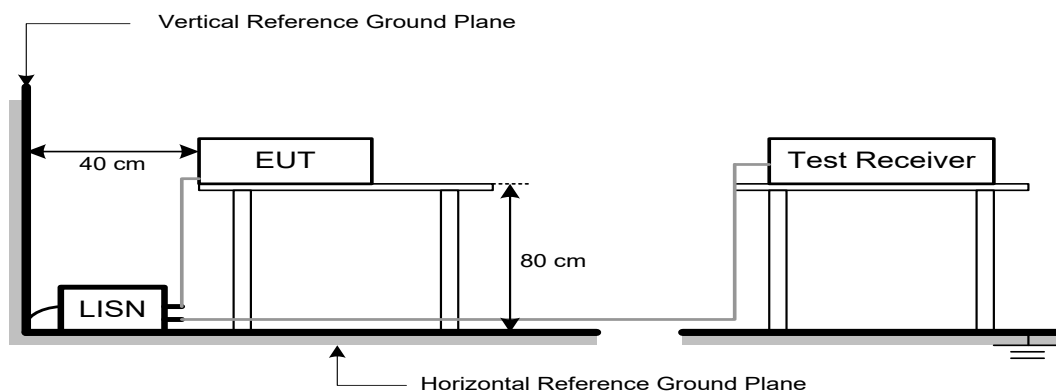

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP

9 kHz to 30 MHz

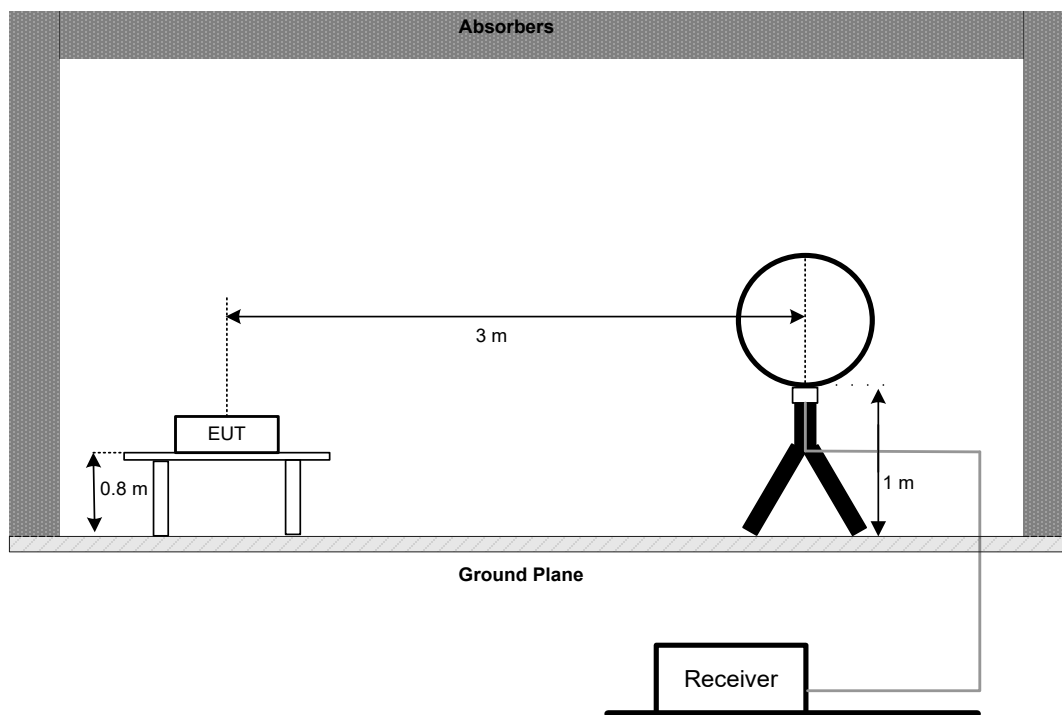


30 MHz to 1 GHz

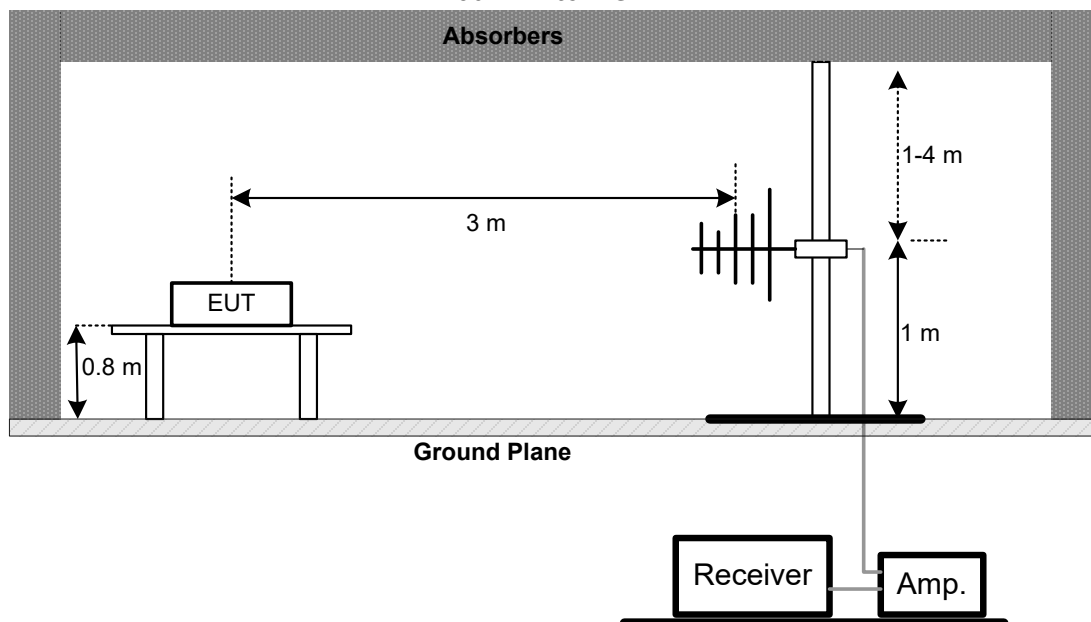


Above 1 GHz

Band edge & Harmonic (1 GHz to 18 GHz)

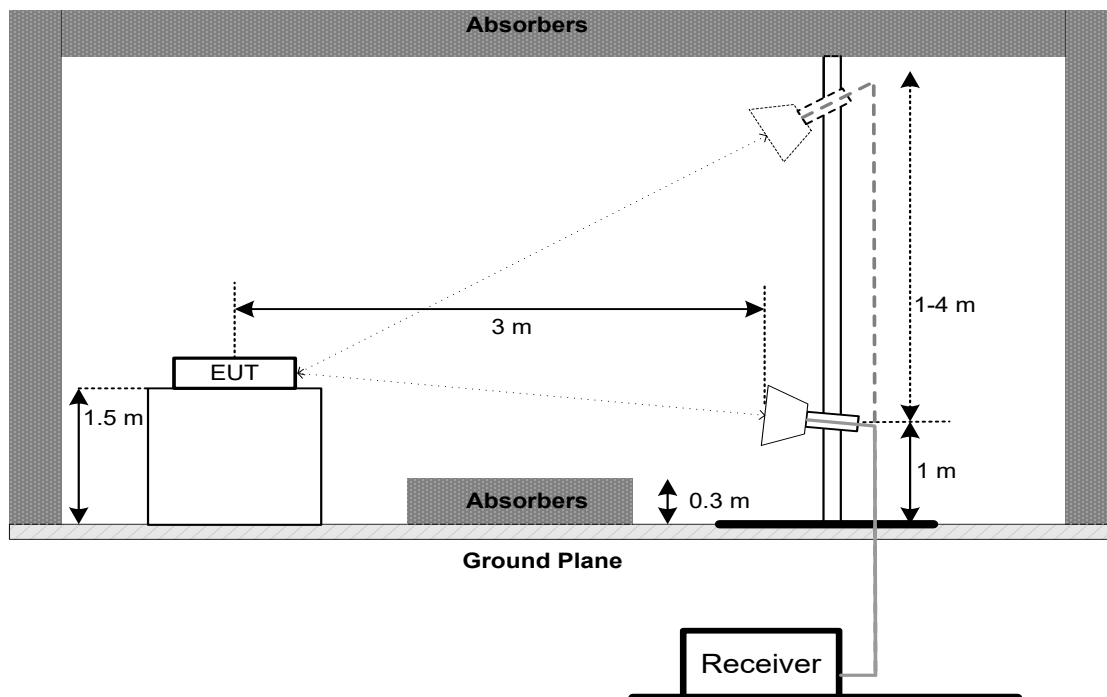

Harmonic (18 GHz to 40 GHz)

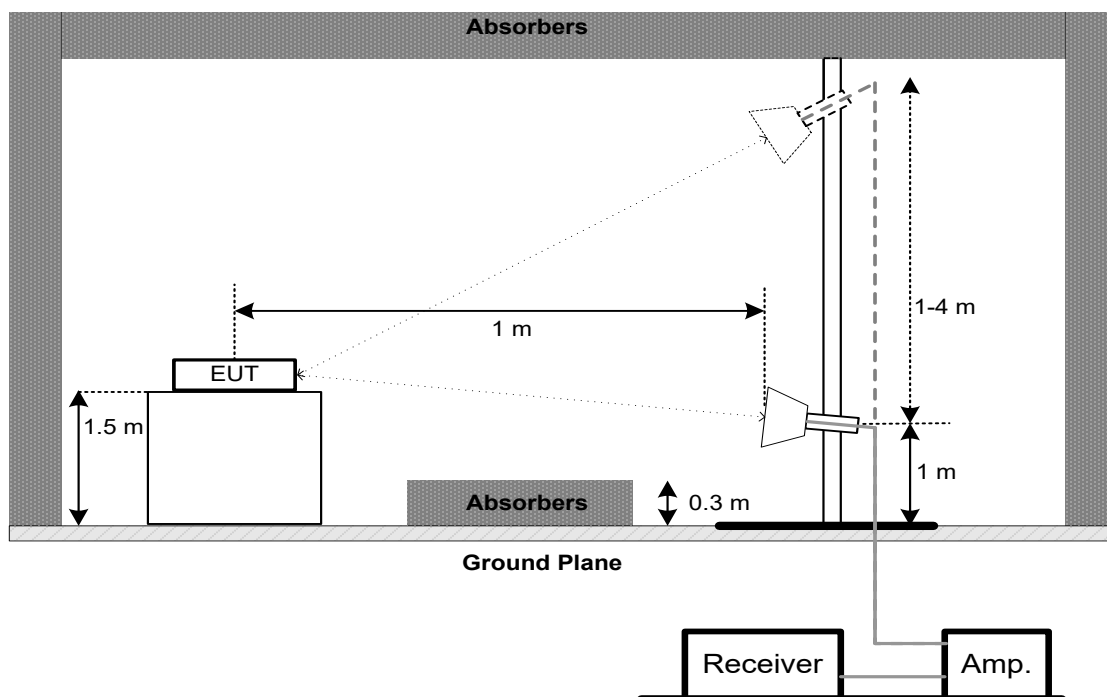

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:


Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

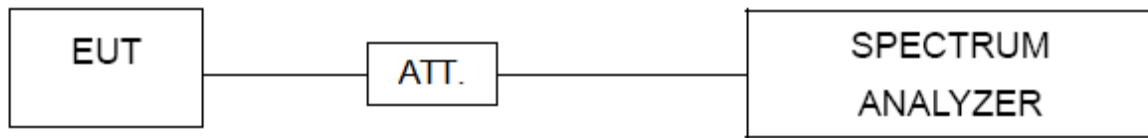

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

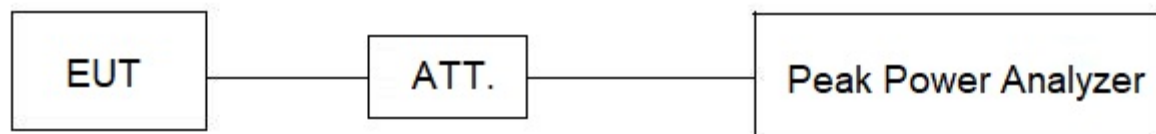

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto


Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 16.5 dB, and the final offset is $16.5 + 7 = 23.5$ dB when RBW=100kHz is used.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

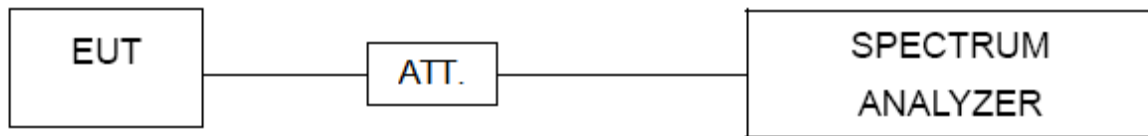

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

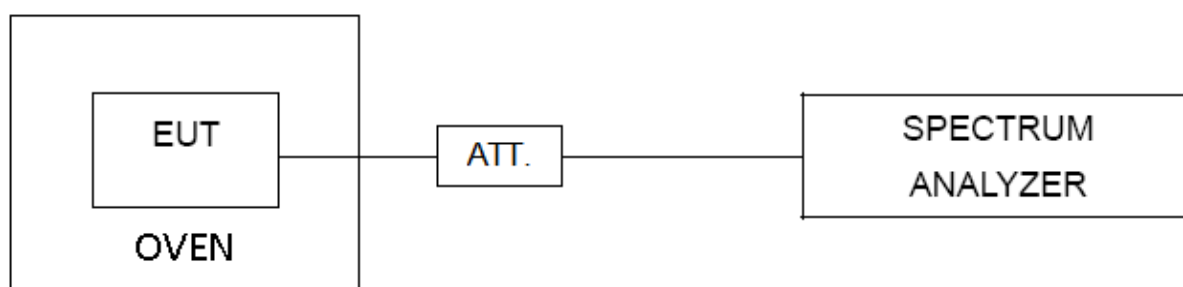

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
2	Double Ridged Guide Antenna	ETS	3115	75789	Jun. 15, 2025
3	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jul. 03, 2025
4	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jul. 03, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
6	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
7	Filter	STI	STI15-9969	N/A	May 31, 2025
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 29, 2025
11	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jul. 03, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Dec. 22, 2024
5	Cable	Woke	20210802 001	RWP50-402-SMSM-1M	N/A
6	Cable	RegalWay	S02-181212-308	RWP50-402-SMSM-1M	N/A
7	AC power source	Preen	AFC-S-1250	F123080107	May 06, 2025

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Phase	Line
-----------	--	-------	------

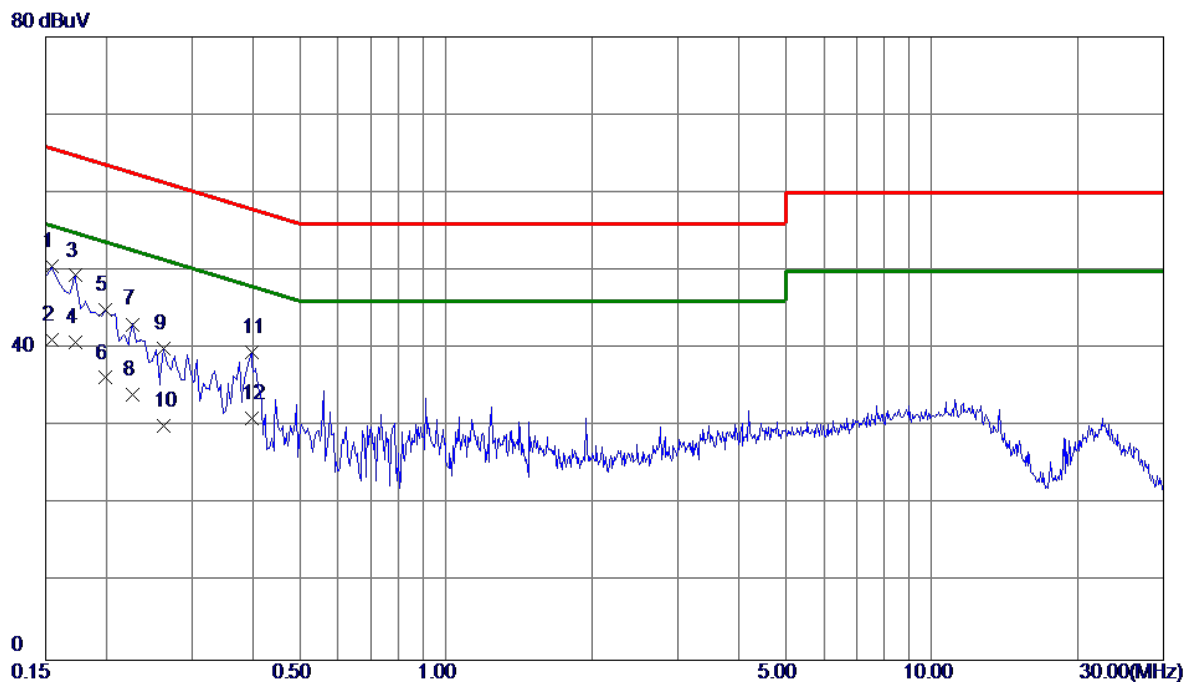


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	40.67	9.93	50.60	65.75	-15.15	QP	
2	0.1545	31.20	9.93	41.13	55.75	-14.62	AVG	
3	0.1725	39.43	9.93	49.36	64.84	-15.48	QP	
4 *	0.1725	30.90	9.93	40.83	54.84	-14.01	AVG	
5	0.1995	35.07	9.94	45.01	63.63	-18.62	QP	
6	0.1995	26.30	9.94	36.24	53.63	-17.39	AVG	
7	0.2265	33.14	9.98	43.12	62.58	-19.46	QP	
8	0.2265	24.10	9.98	34.08	52.58	-18.50	AVG	
9	0.2625	29.97	10.04	40.01	61.35	-21.34	QP	
10	0.2625	20.10	10.04	30.14	51.35	-21.21	AVG	
11	0.3975	29.23	10.34	39.57	57.91	-18.34	QP	
12	0.3975	20.70	10.34	31.04	47.91	-16.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

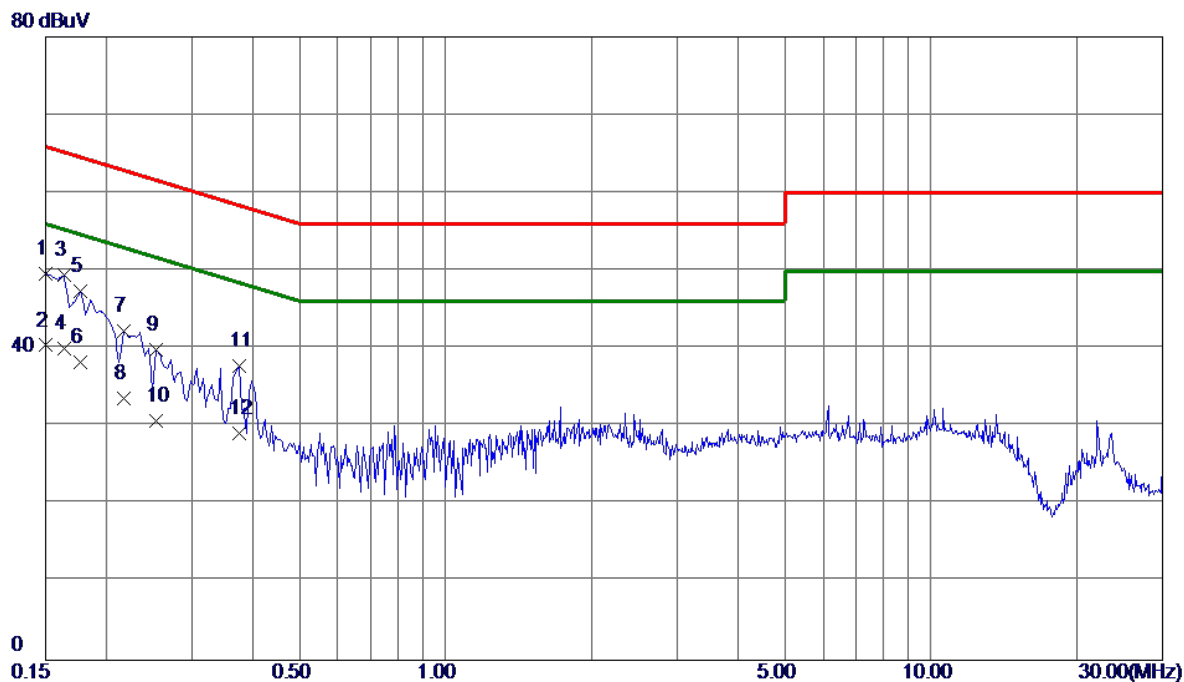


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	39.76	9.90	49.66	66.00	-16.34	QP	
2	0.1500	30.50	9.90	40.40	56.00	-15.60	AVG	
3	0.1635	39.60	9.89	49.49	65.28	-15.79	QP	
4 *	0.1635	30.10	9.89	39.99	55.28	-15.29	AVG	
5	0.1770	37.52	9.89	47.41	64.63	-17.22	QP	
6	0.1770	28.40	9.89	38.29	54.63	-16.34	AVG	
7	0.2175	32.36	9.93	42.29	62.91	-20.62	QP	
8	0.2175	23.60	9.93	33.53	52.91	-19.38	AVG	
9	0.2535	29.80	9.99	39.79	61.64	-21.85	QP	
10	0.2535	20.70	9.99	30.69	51.64	-20.95	AVG	
11	0.3750	27.46	10.26	37.72	58.39	-20.67	QP	
12	0.3750	18.89	10.26	29.15	48.39	-19.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

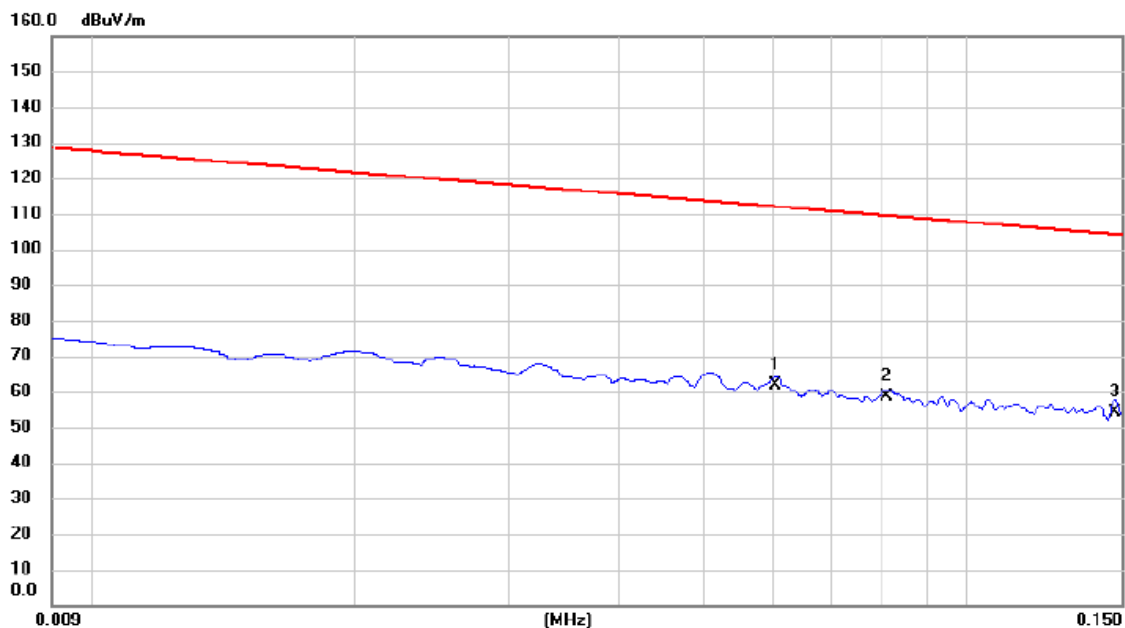


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0605	40.43	21.27	61.70	111.97	-50.27	AVG	
2		0.0808	37.26	21.34	58.60	109.46	-50.86	AVG	
3	*	0.1476	33.03	21.27	54.30	104.23	-49.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

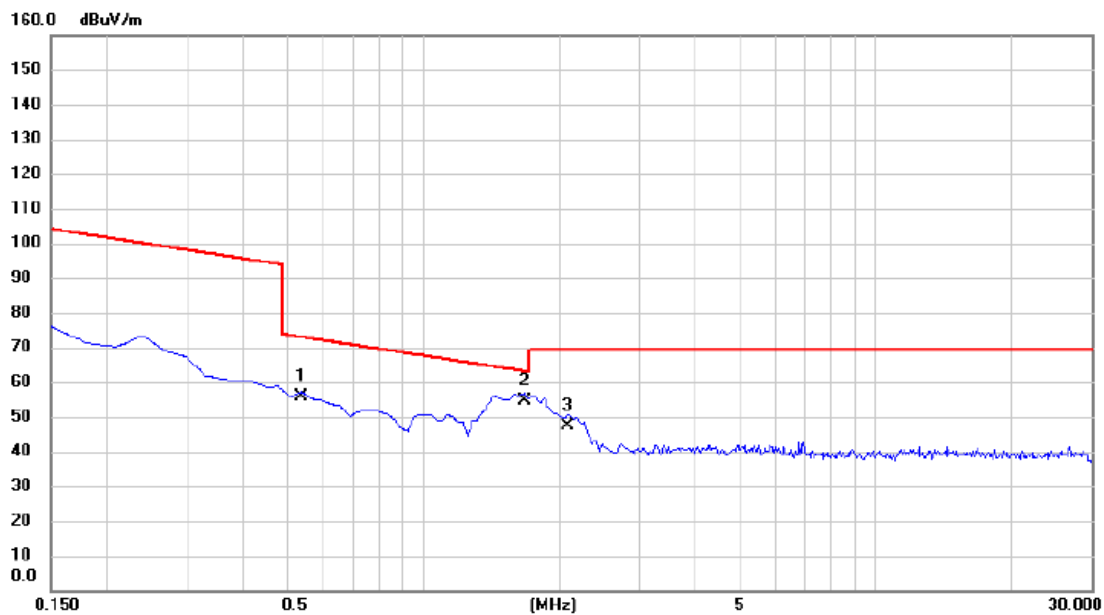


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.5380	34.54	21.07	55.61	72.99	-17.38	QP	
2	*	1.6723	33.47	21.14	54.61	63.14	-8.53	QP	
3		2.0902	26.46	21.11	47.57	69.54	-21.97	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

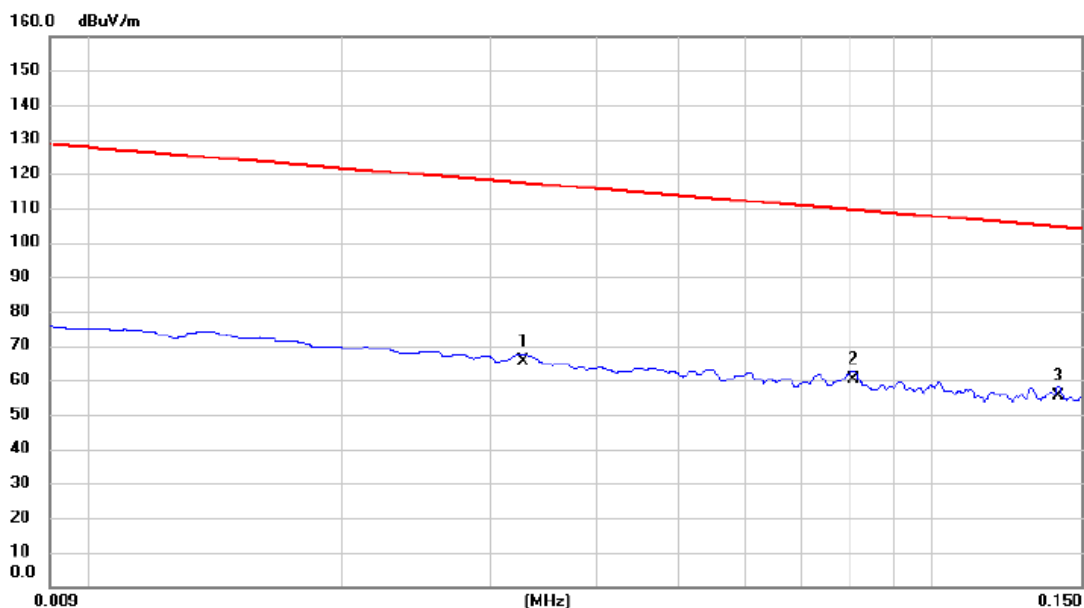


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0328	44.34	21.15	65.49	117.29	-51.80	AVG	
2		0.0806	38.68	21.34	60.02	109.48	-49.46	AVG	
3	*	0.1410	34.25	21.28	55.53	104.62	-49.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

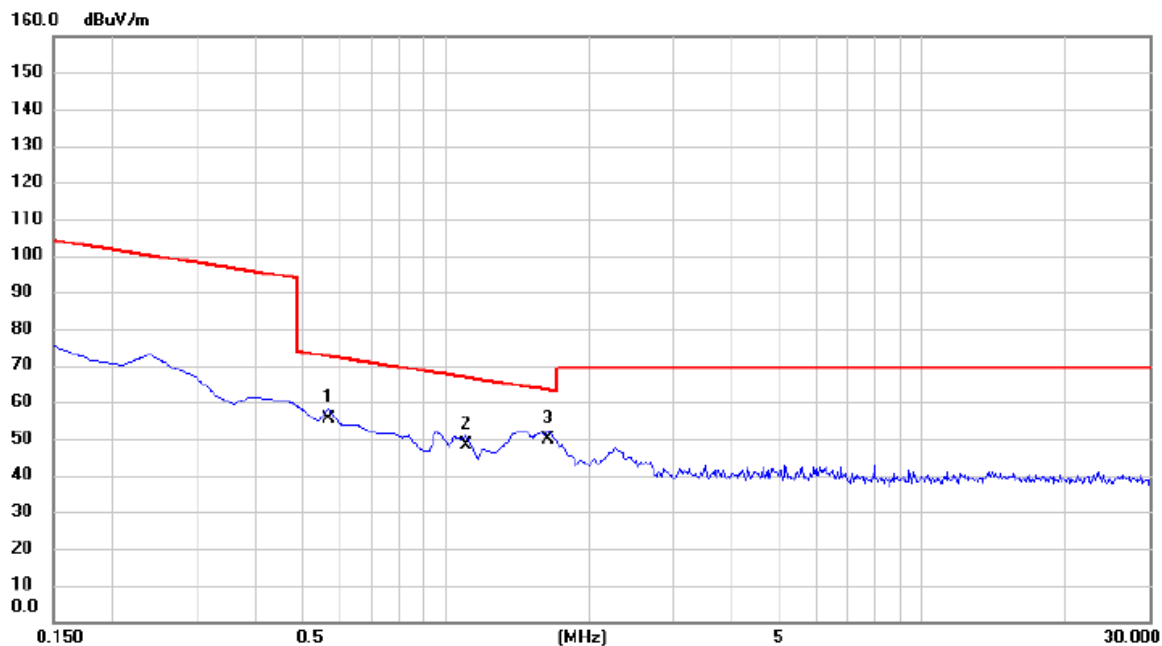

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.5678	34.25	21.08	55.33	72.52	-17.19	QP	
2		1.1050	27.15	21.19	48.34	66.74	-18.40	QP	
3	*	1.6425	28.61	21.15	49.76	63.29	-13.53	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

100 dBuV/m

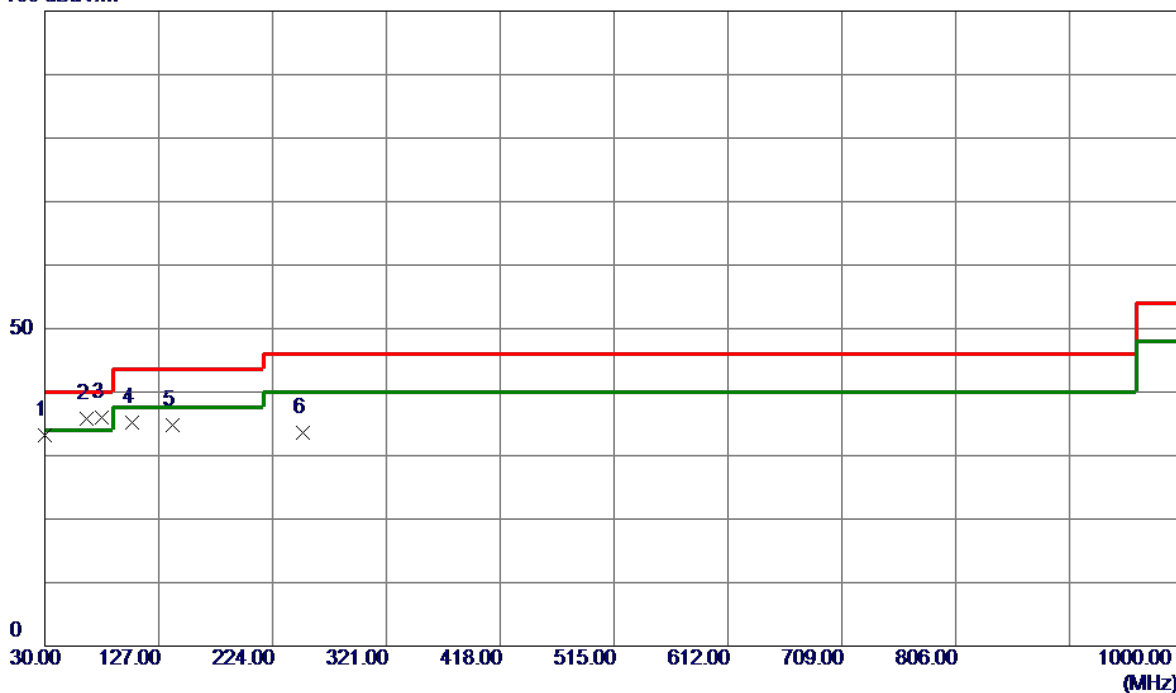


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	46.29	-13.12	33.17	40.00	-6.83	QP	
2	65.8900	48.57	-12.82	35.75	40.00	-4.25	Peak	
3 *	78.0150	50.93	-15.02	35.91	40.00	-4.09	QP	
4	104.6900	50.31	-15.14	35.17	43.52	-8.35	Peak	
5	138.6400	46.59	-11.79	34.80	43.52	-8.72	Peak	
6	250.1900	45.96	-12.35	33.61	46.02	-12.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 151 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

100 dBuV/m

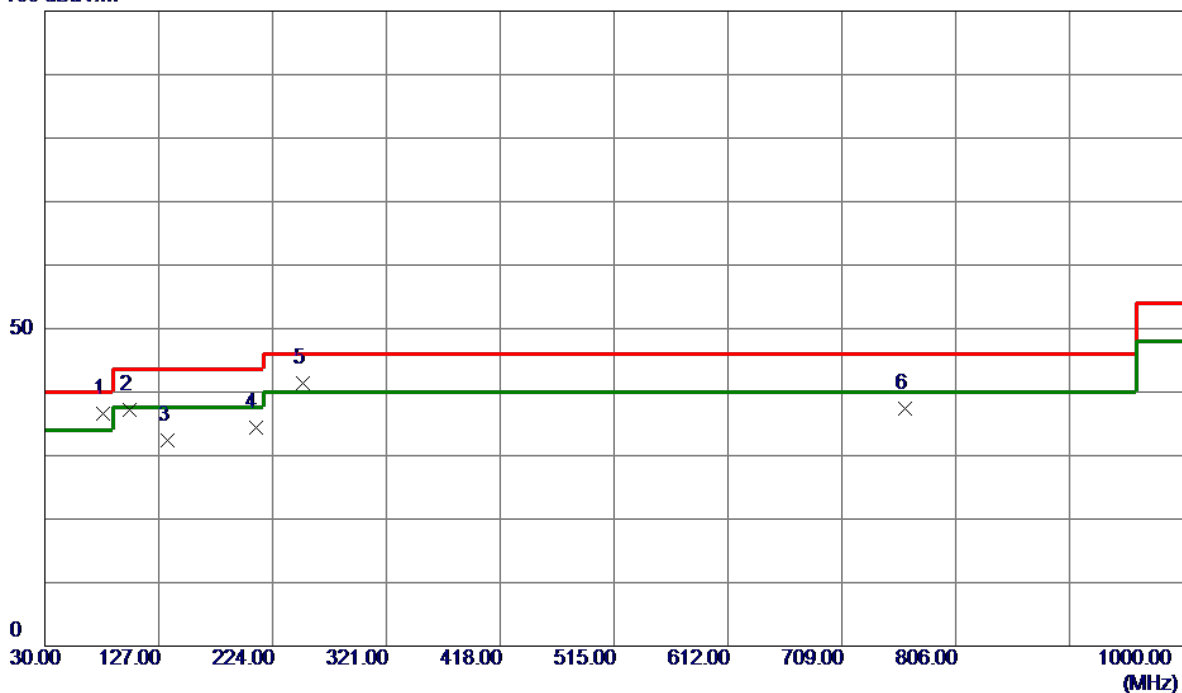


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	79.4700	51.86	-15.34	36.52	40.00	-3.48	QP	
2	102.2650	52.71	-15.54	37.17	43.52	-6.35	QP	
3	134.7600	44.49	-12.07	32.42	43.52	-11.10	Peak	
4	209.4500	48.89	-14.43	34.46	43.52	-9.06	Peak	
5	250.1900	53.70	-12.35	41.35	46.02	-4.67	Peak	
6	763.3200	38.52	-1.11	37.41	46.02	-8.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

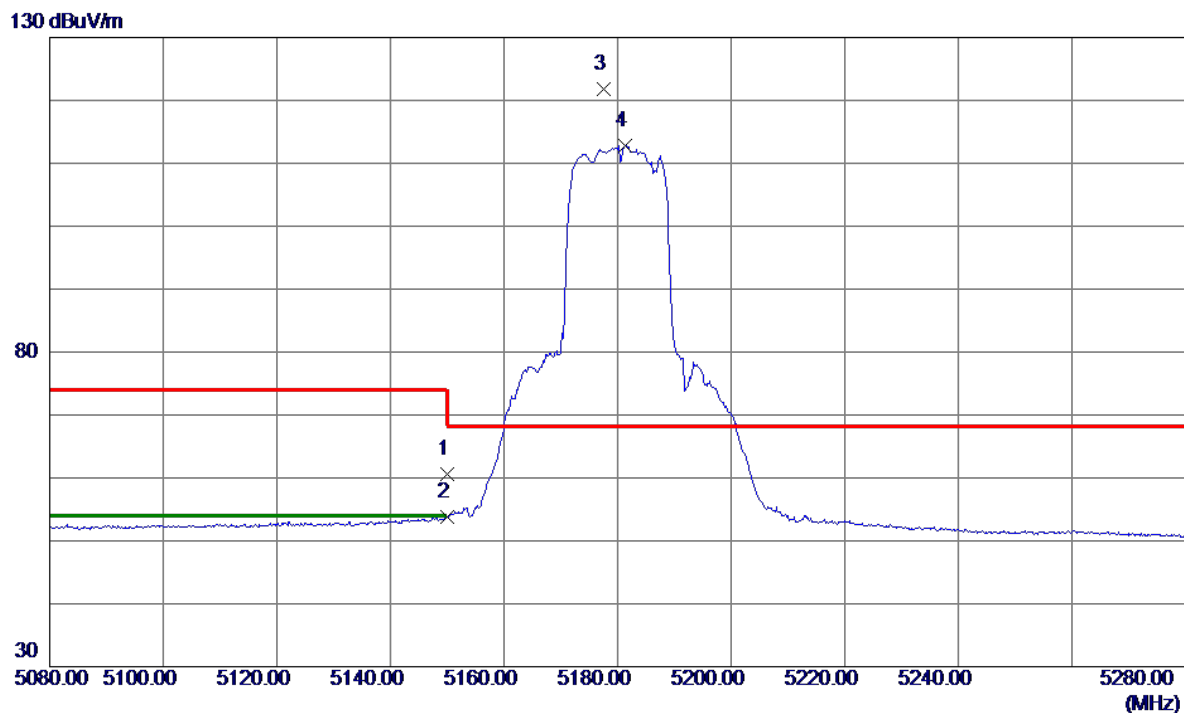


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.21	15.31	60.52	74.00	-13.48	Peak	
2	5150.0000	38.42	15.31	53.73	54.00	-0.27	AVG	
3 *	5177.5000	106.38	15.37	121.75	68.20	53.55	Peak	No Limit
4	5181.3000	97.50	15.38	112.88	999.00	-886.12	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

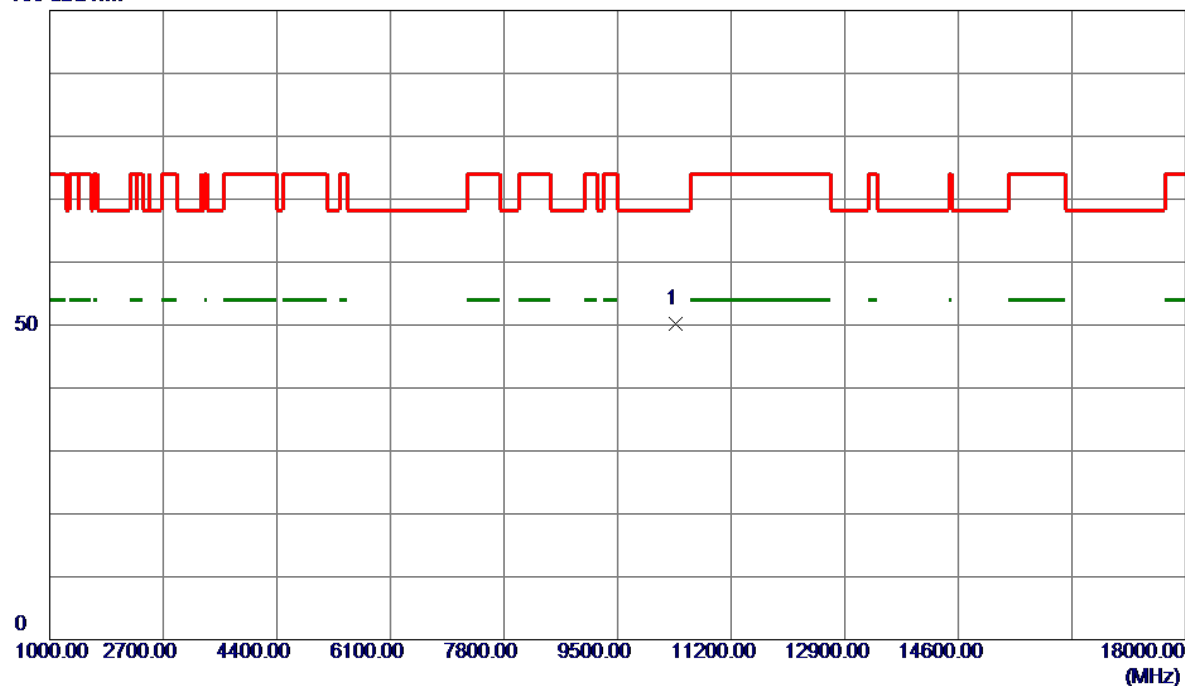


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10362.7500	41.09	9.05	50.14	68.20	-18.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

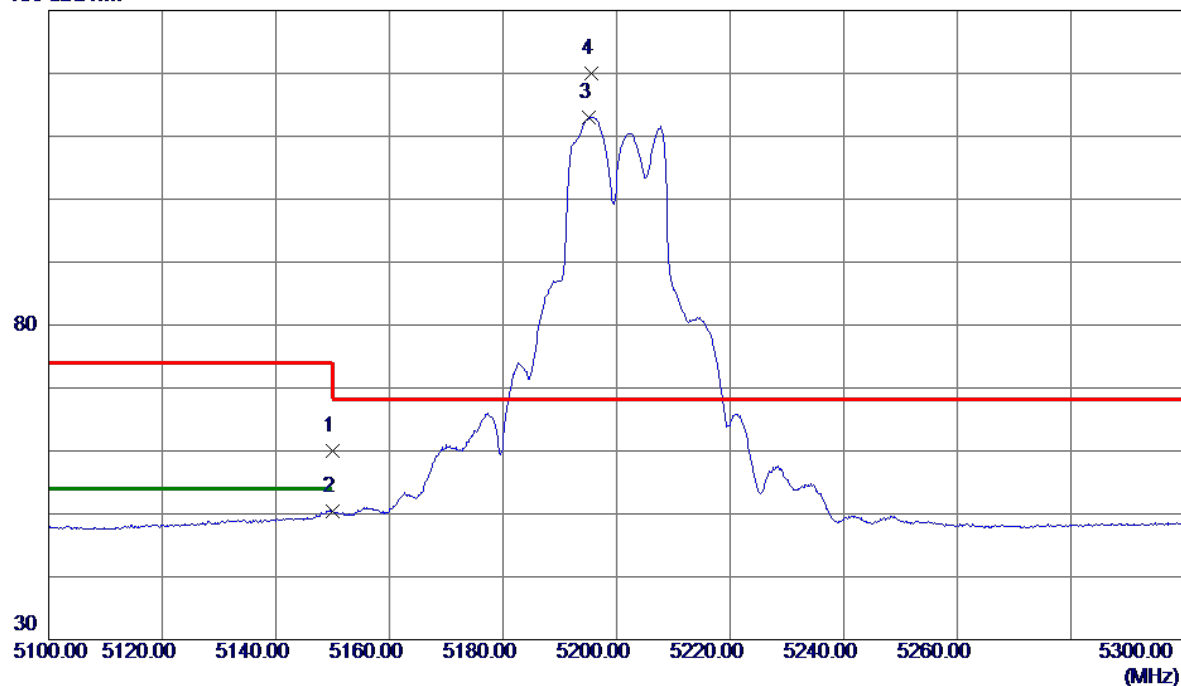


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.61	13.43	60.04	74.00	-13.96	Peak	
2	5150.0000	36.95	13.43	50.38	54.00	-3.62	AVG	
3	5195.2000	99.54	13.53	113.07	999.00	-885.93	AVG	No Limit
4 *	5195.6000	106.54	13.53	120.07	68.20	51.87	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

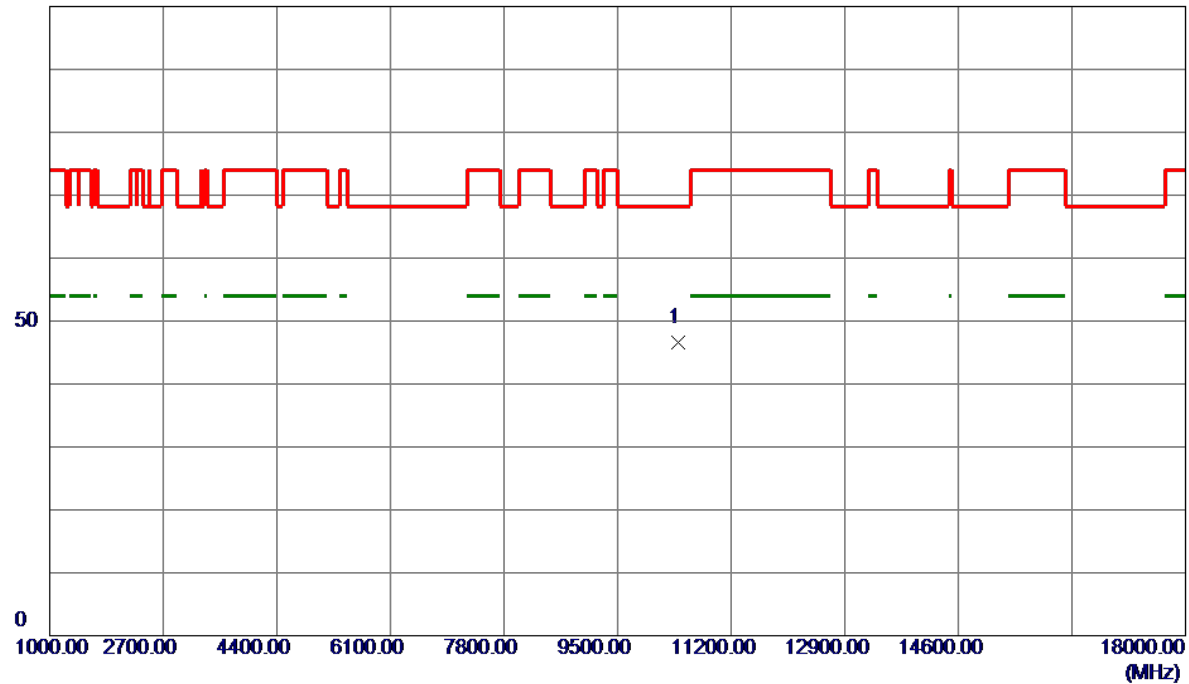


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10406.6000	37.45	9.10	46.55	68.20	-21.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

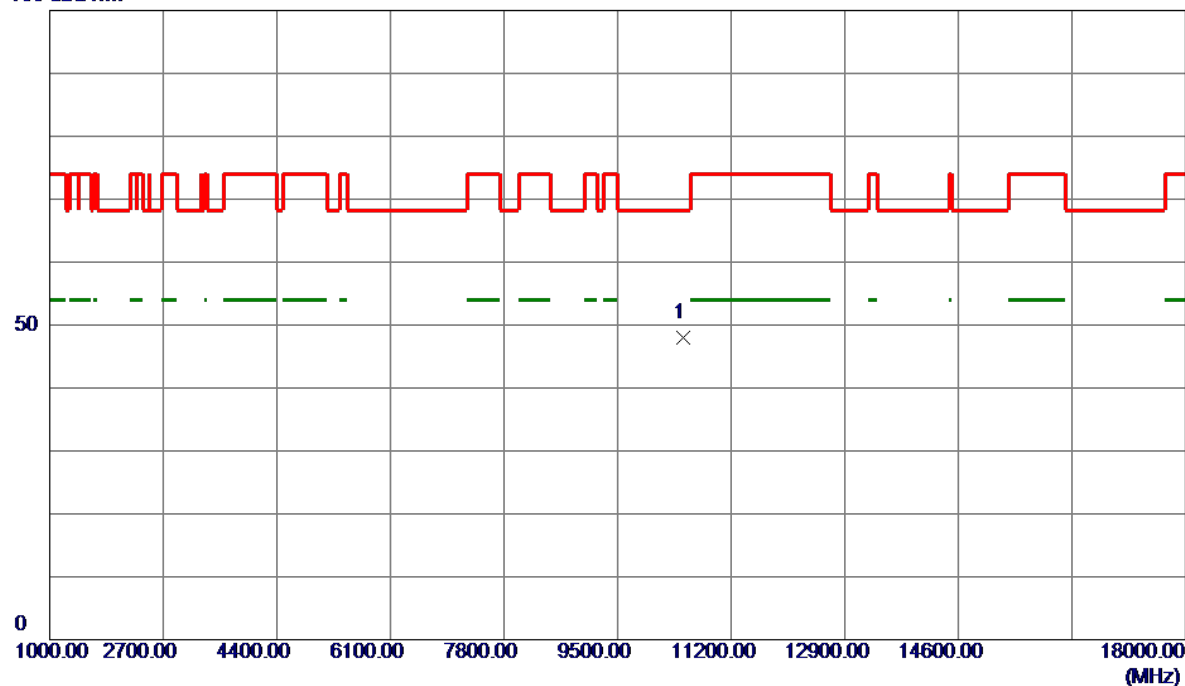


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10486.1000	38.73	9.18	47.91	68.20	-20.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

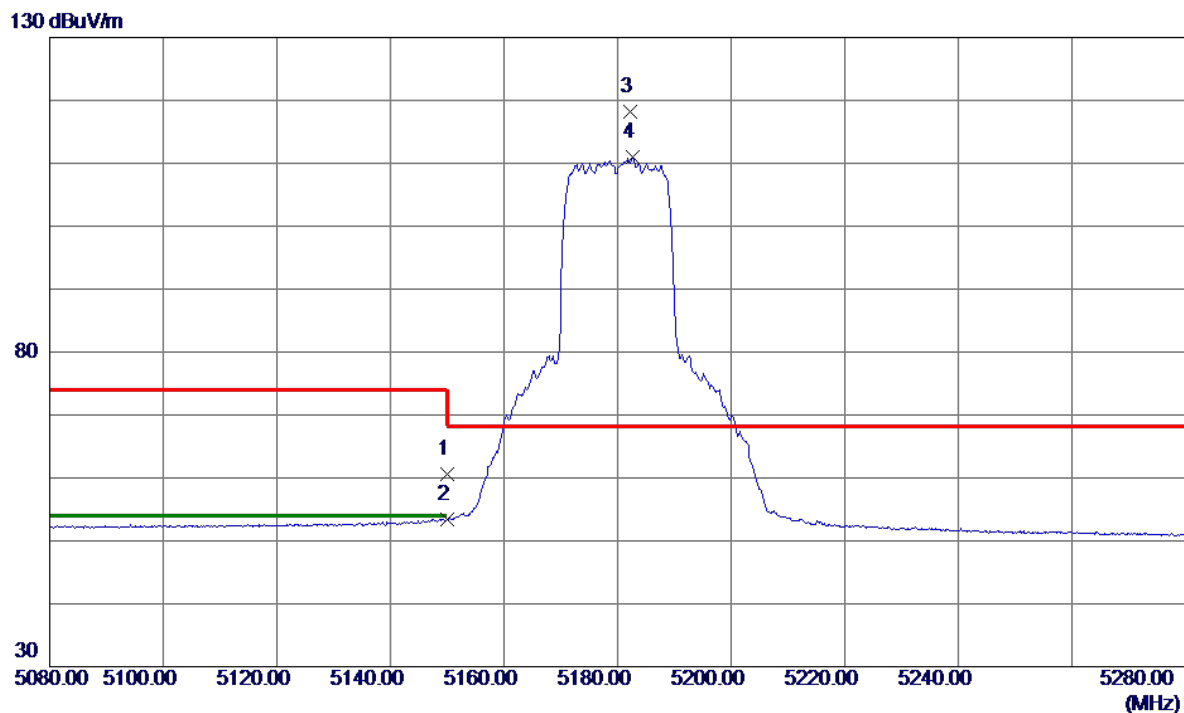


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.37	15.31	60.68	74.00	-13.32	Peak	
2	5150.0000	38.11	15.31	53.42	54.00	-0.58	AVG	
3 *	5182.2000	102.92	15.38	118.30	68.20	50.10	Peak	No Limit
4	5182.6000	95.52	15.38	110.90	999.00	-888.10	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

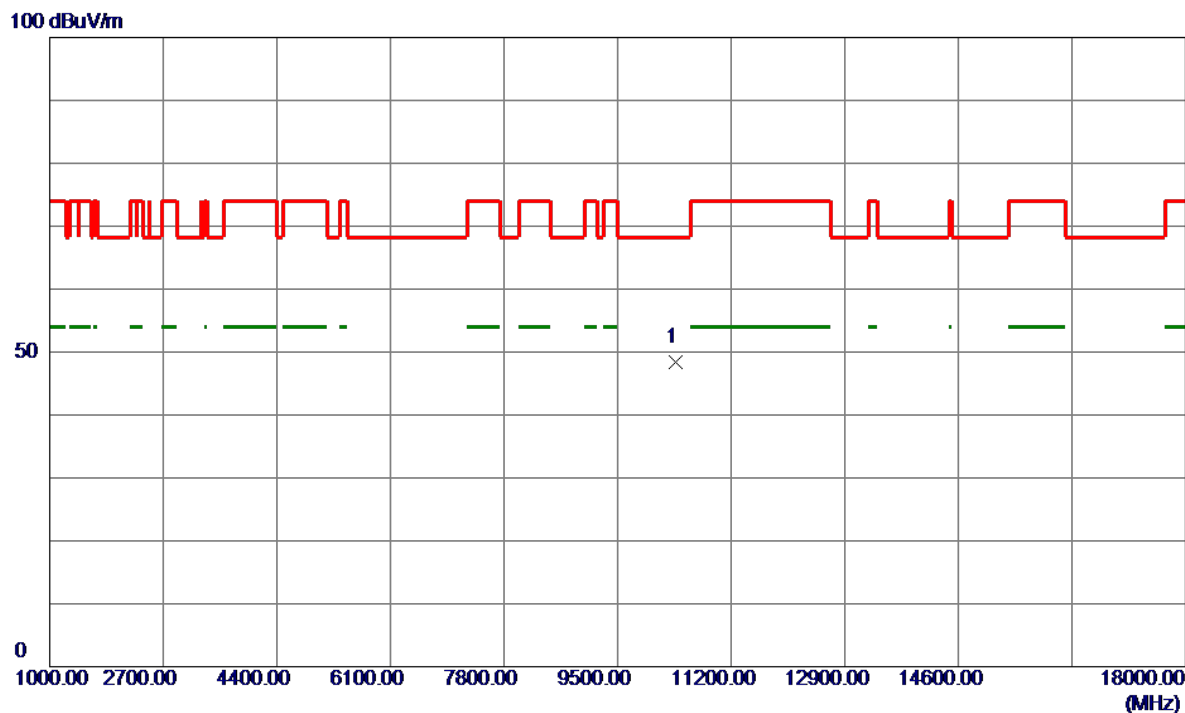


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10364.3000	39.44	9.05	48.49	68.20	-19.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

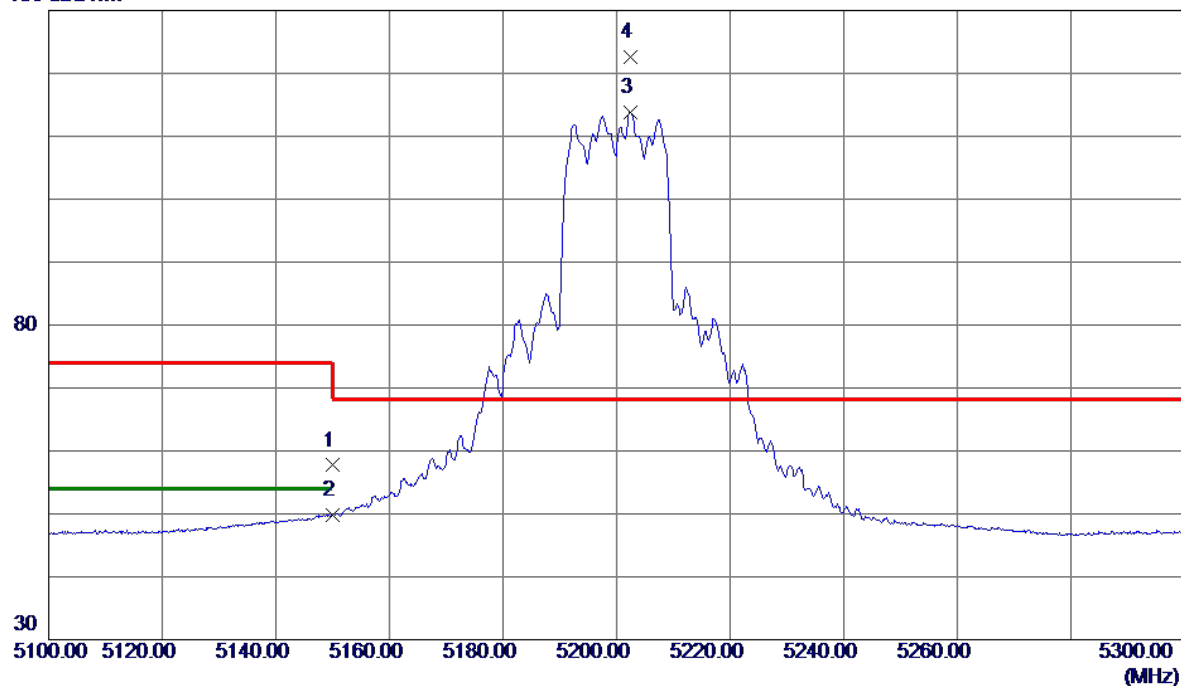


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.27	13.43	57.70	74.00	-16.30	Peak	
2	5150.0000	36.31	13.43	49.74	54.00	-4.26	AVG	
3	5202.4000	100.19	13.54	113.73	999.00	-885.27	AVG	No Limit
4 *	5202.5000	109.06	13.54	122.60	68.20	54.40	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

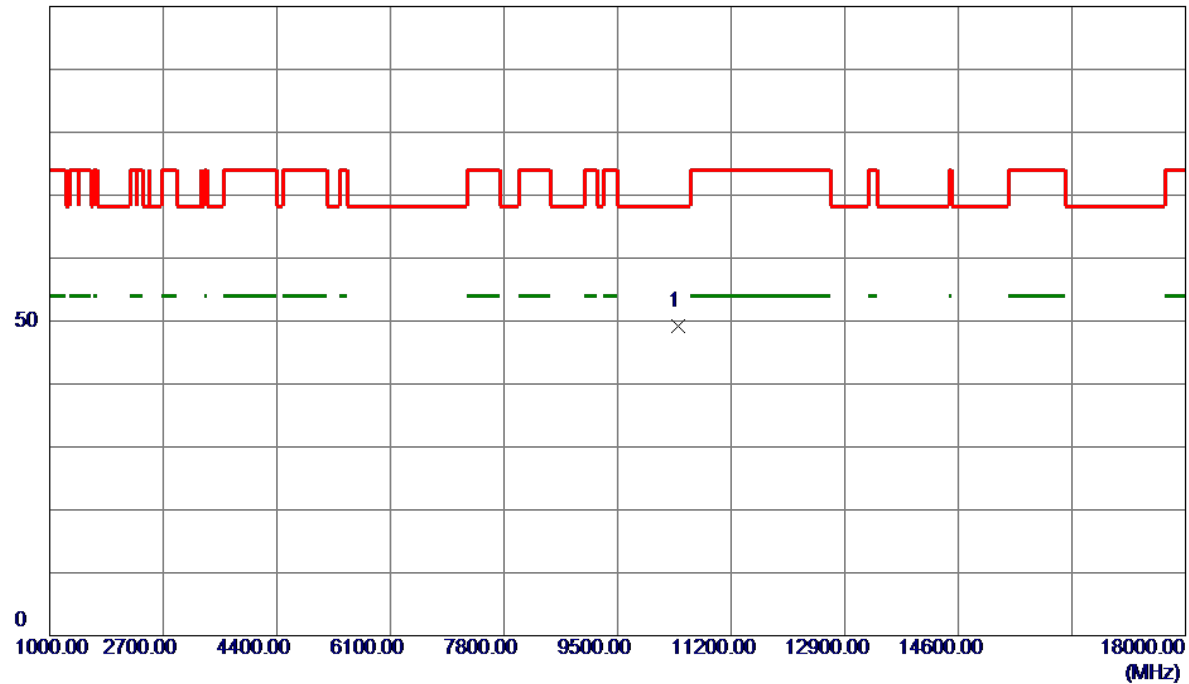


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10404.2000	40.11	9.10	49.21	68.20	-18.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

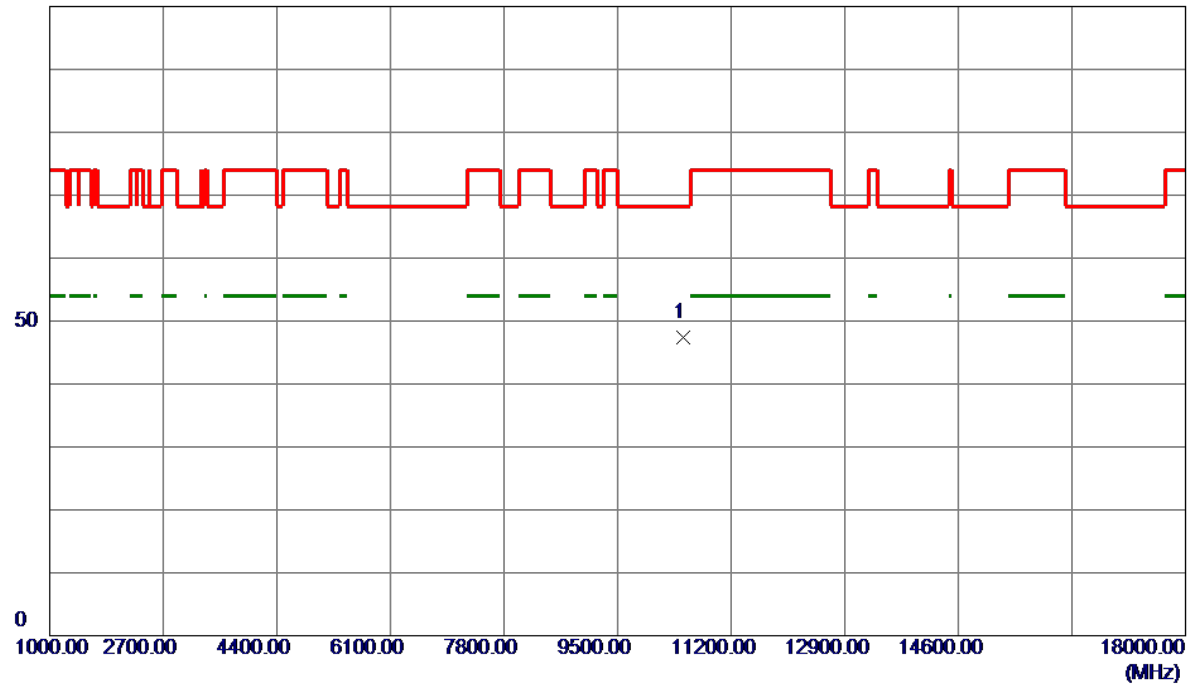


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.5000	38.21	9.18	47.39	68.20	-20.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

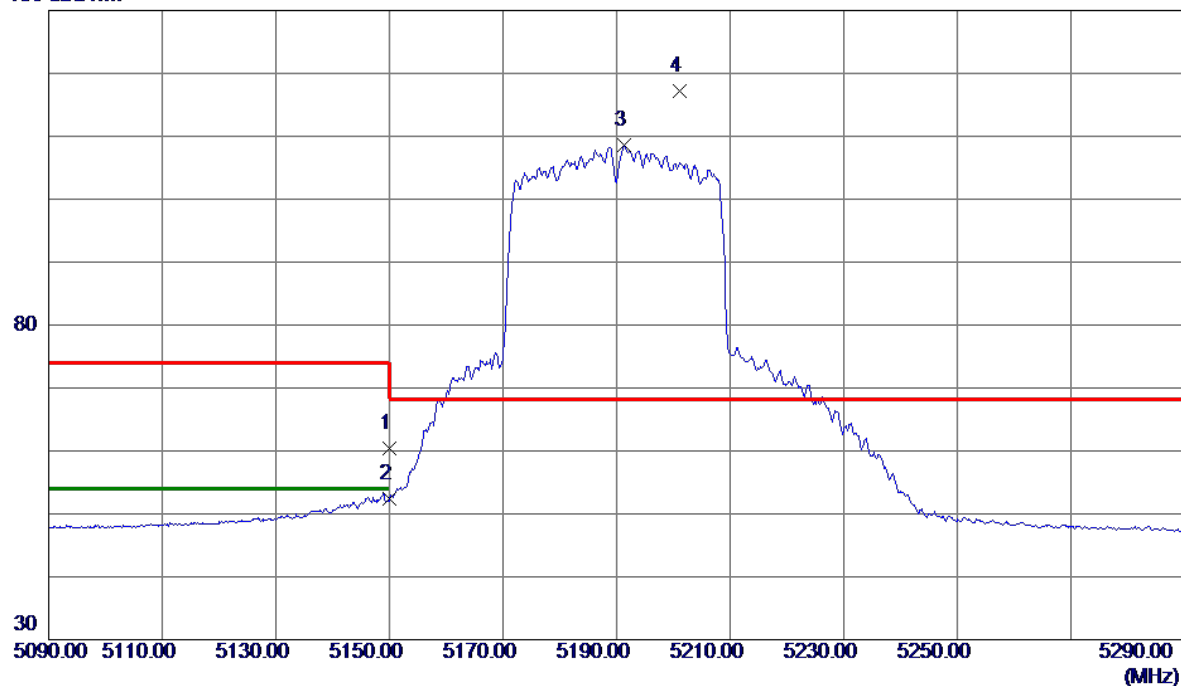


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.03	15.31	60.34	74.00	-13.66	Peak	
2	5150.0000	37.16	15.31	52.47	54.00	-1.53	AVG	
3	5191.3000	93.26	15.40	108.66	999.00	-890.34	AVG	No Limit
4 *	5201.2000	101.81	15.42	117.23	68.20	49.03	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

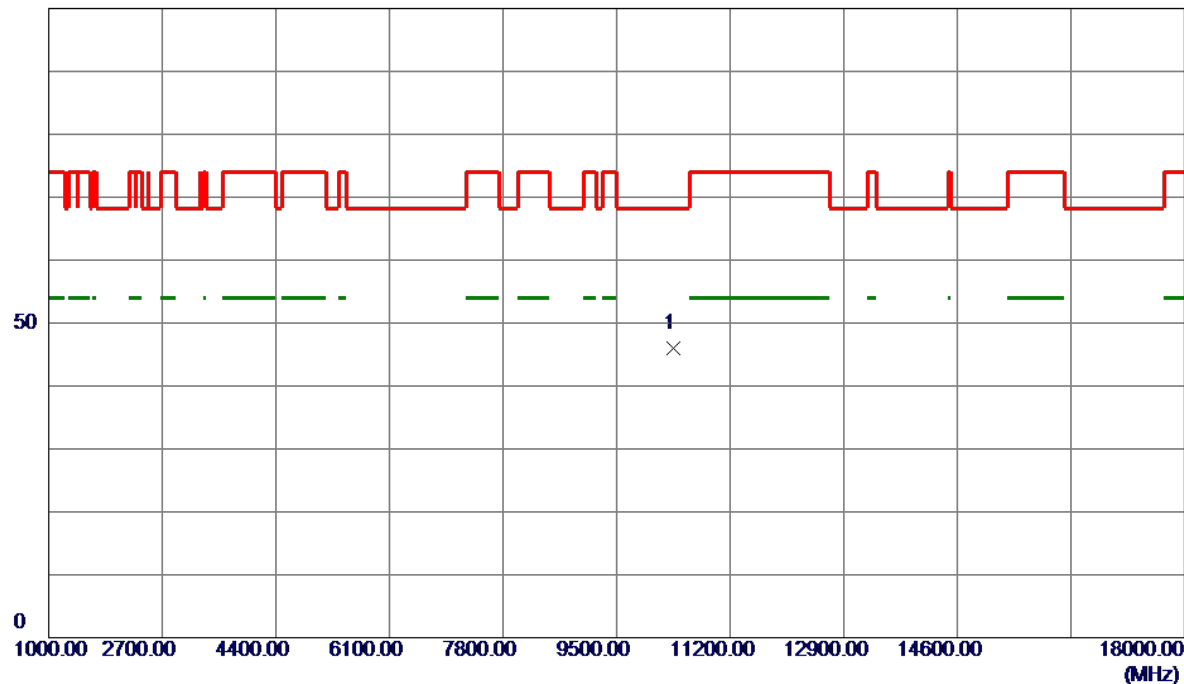


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.3500	36.92	9.05	45.97	68.20	-22.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

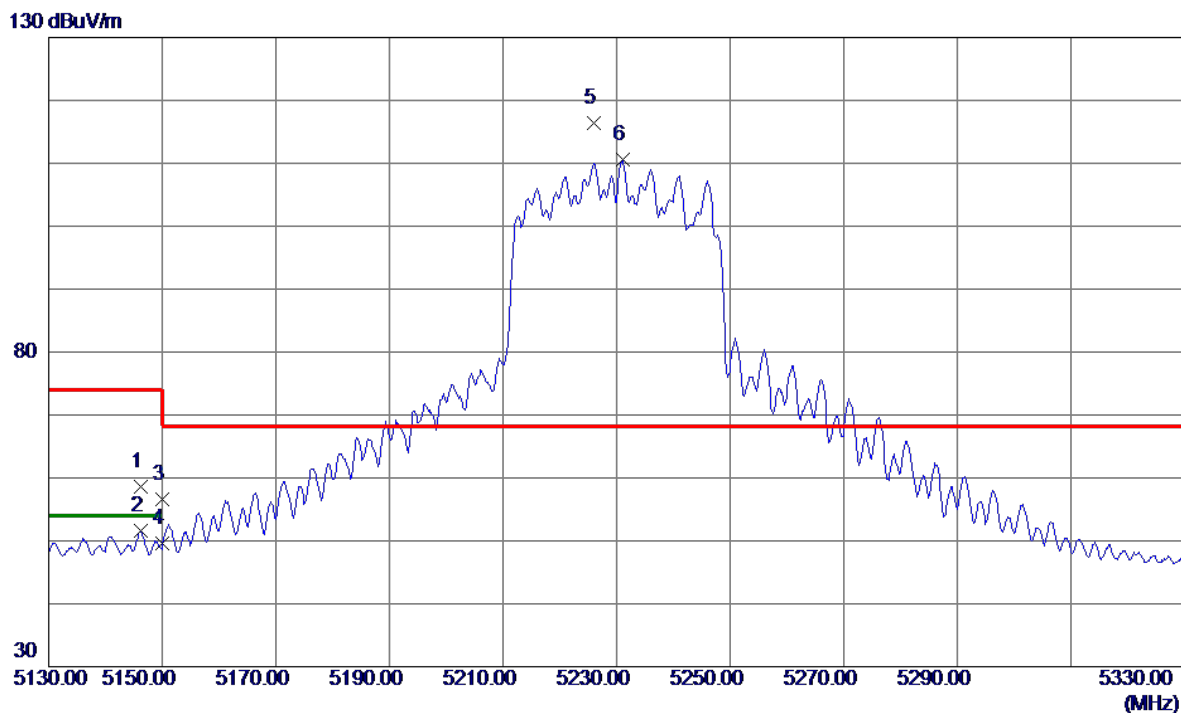


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.2000	45.18	13.42	58.60	74.00	-15.40	Peak	
2	5146.2000	38.23	13.42	51.65	54.00	-2.35	AVG	
3	5150.0000	43.08	13.43	56.51	74.00	-17.49	Peak	
4	5150.0000	36.09	13.43	49.52	54.00	-4.48	AVG	
5 *	5226.0000	102.84	13.59	116.43	68.20	48.23	Peak	No Limit
6	5231.1000	96.98	13.60	110.58	999.00	-888.42	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

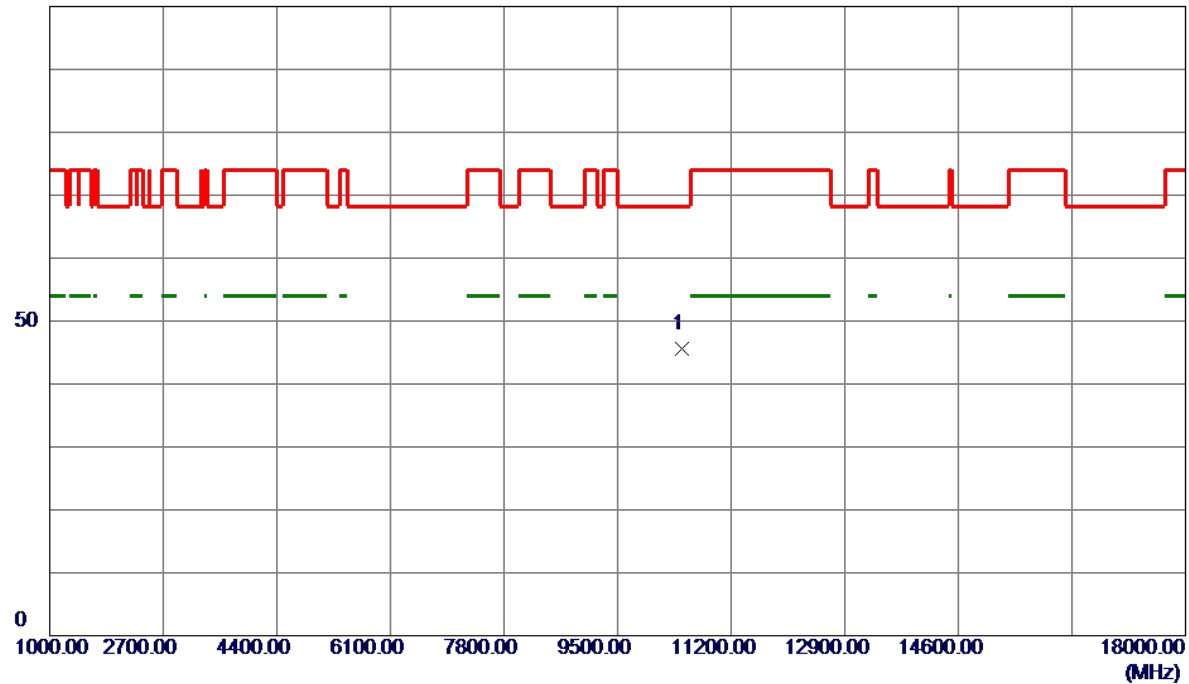


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10465.0000	36.44	9.16	45.60	68.20	-22.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

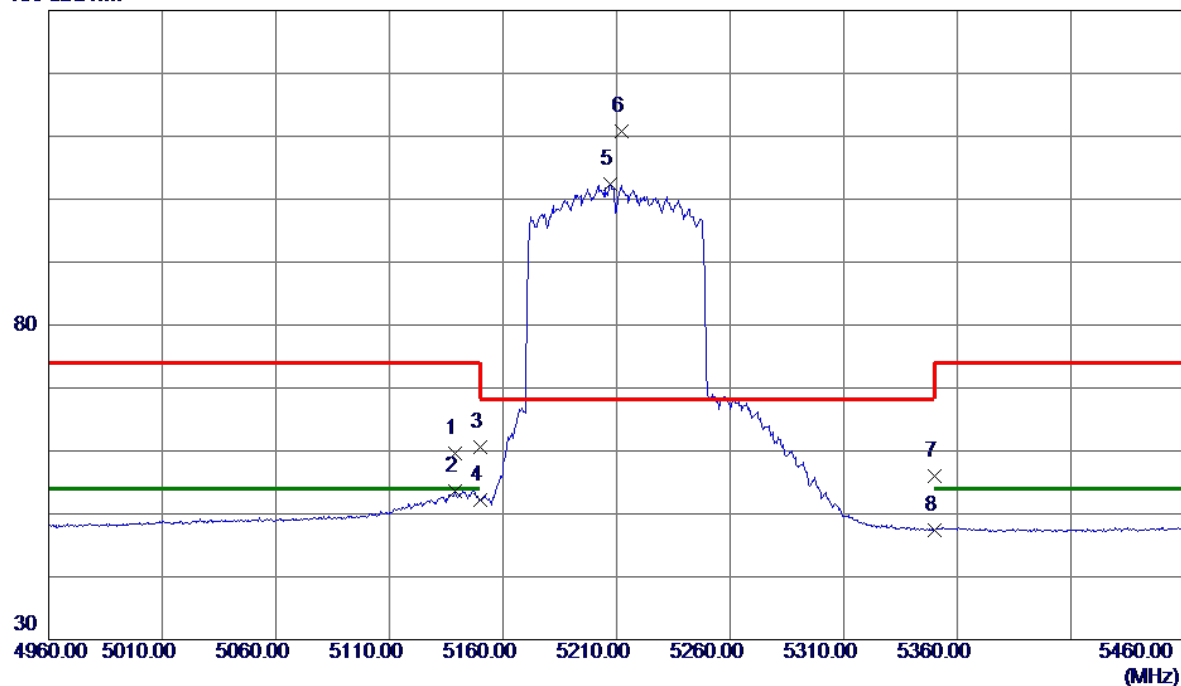


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5138.7500	44.27	15.29	59.56	74.00	-14.44	Peak	
2	5138.7500	38.38	15.29	53.67	54.00	-0.33	AVG	
3	5150.0000	45.28	15.31	60.59	74.00	-13.41	Peak	
4	5150.0000	36.90	15.31	52.21	54.00	-1.79	AVG	
5	5207.2500	86.99	15.43	102.42	999.00	-896.58	AVG	No Limit
6 *	5212.0000	95.27	15.44	110.71	68.20	42.51	Peak	No Limit
7	5350.0000	40.26	15.73	55.99	74.00	-18.01	Peak	
8	5350.0000	31.71	15.73	47.44	54.00	-6.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

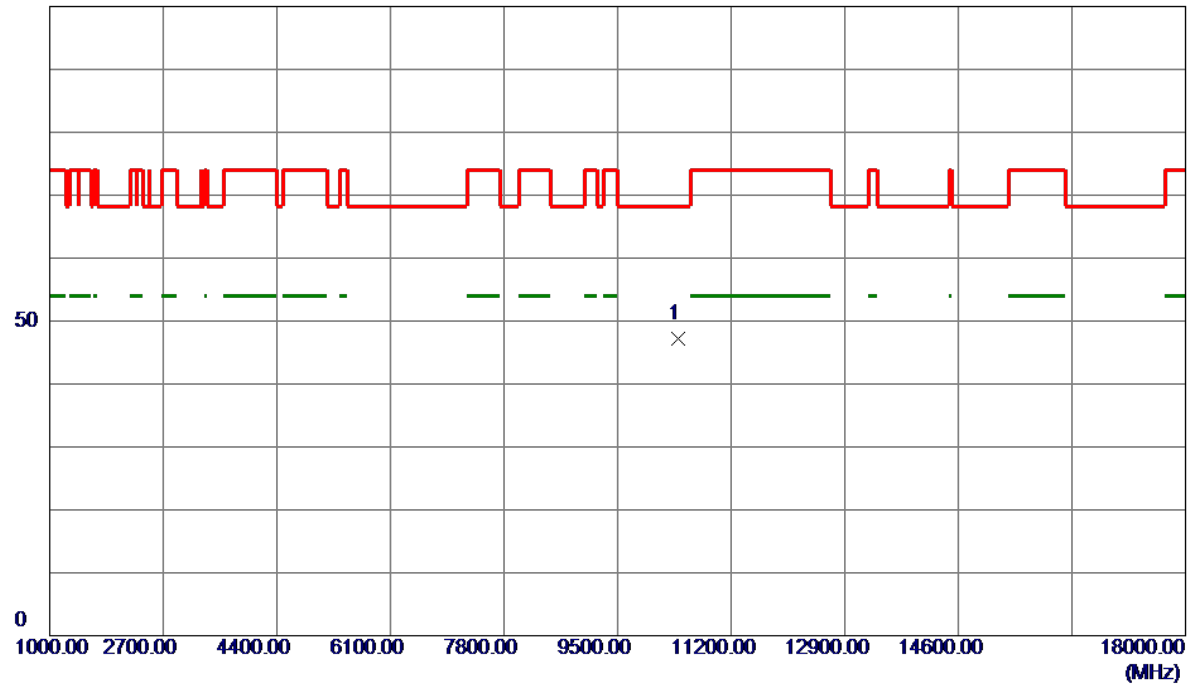


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10415.1100	38.10	9.11	47.21	68.20	-20.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

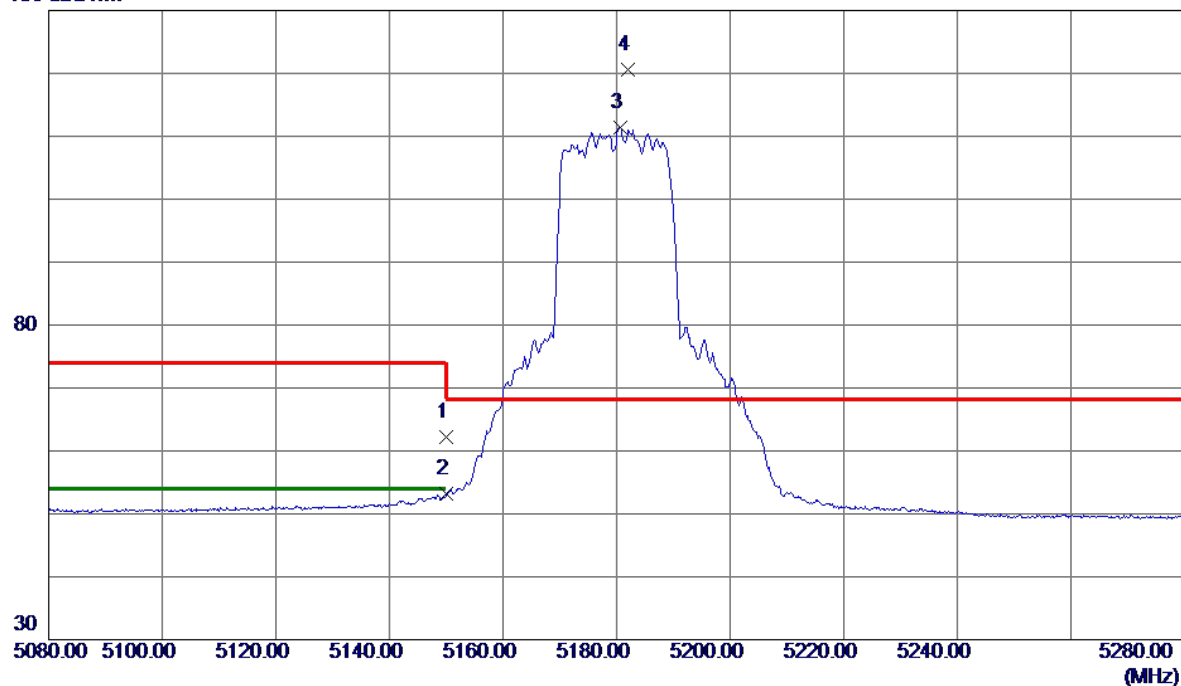


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.94	15.31	62.25	74.00	-11.75	Peak	
2	5150.0000	37.83	15.31	53.14	54.00	-0.86	AVG	
3	5180.6000	96.09	15.38	111.47	999.00	-887.53	AVG	No Limit
4 *	5182.0000	105.28	15.38	120.66	68.20	52.46	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

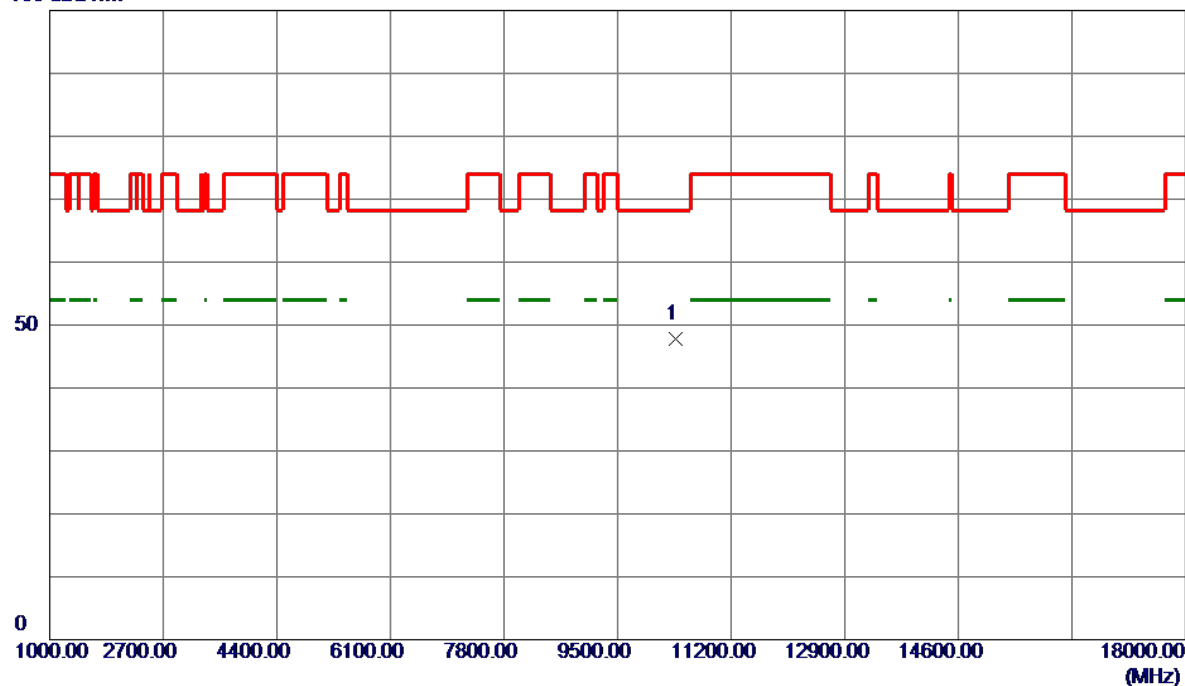


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10363.4000	38.74	9.05	47.79	68.20	-20.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

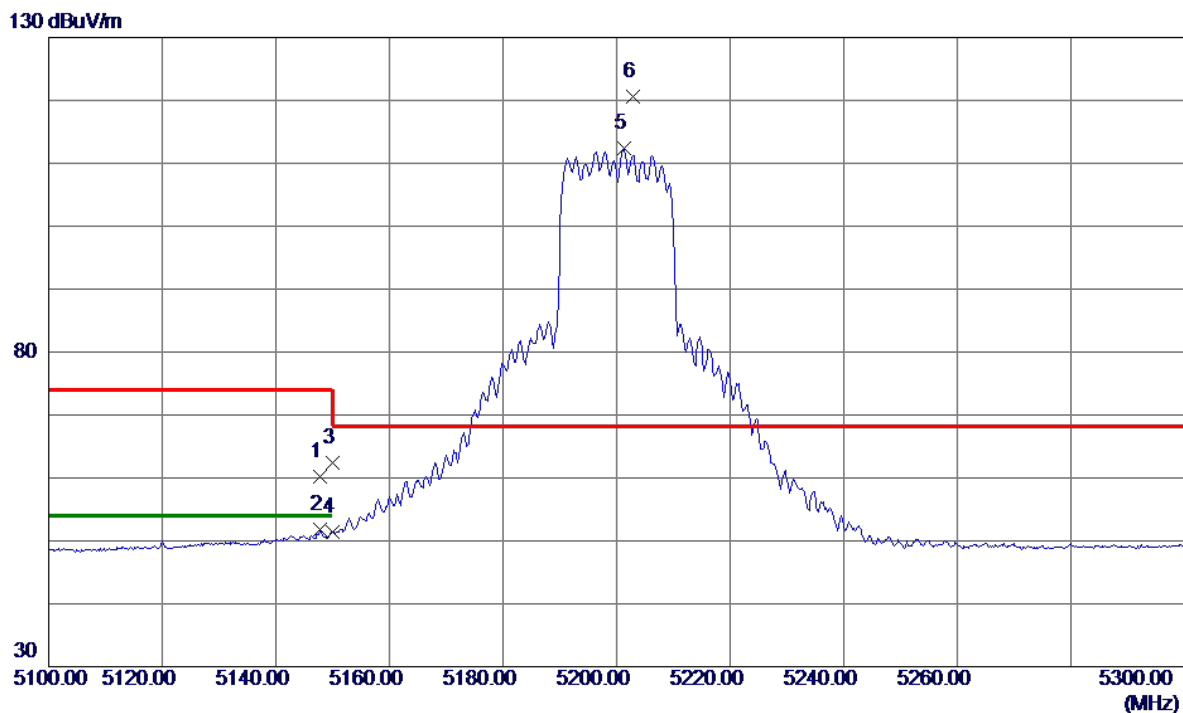


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.8000	46.70	13.42	60.12	74.00	-13.88	Peak	
2	5147.8000	38.42	13.42	51.84	54.00	-2.16	AVG	
3	5150.0000	49.06	13.43	62.49	74.00	-11.51	Peak	
4	5150.0000	38.03	13.43	51.46	54.00	-2.54	AVG	
5	5201.3000	98.83	13.54	112.37	999.00	-886.63	AVG	No Limit
6 *	5202.9000	107.14	13.54	120.68	68.20	52.48	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

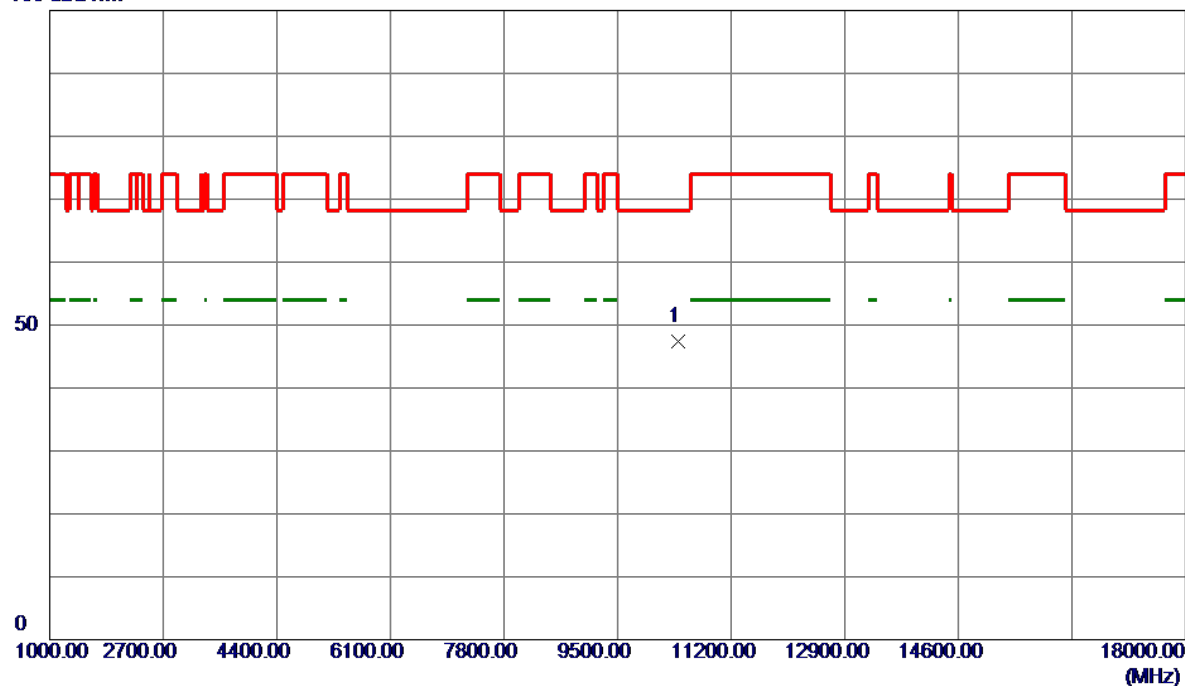


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.2500	38.25	9.09	47.34	68.20	-20.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

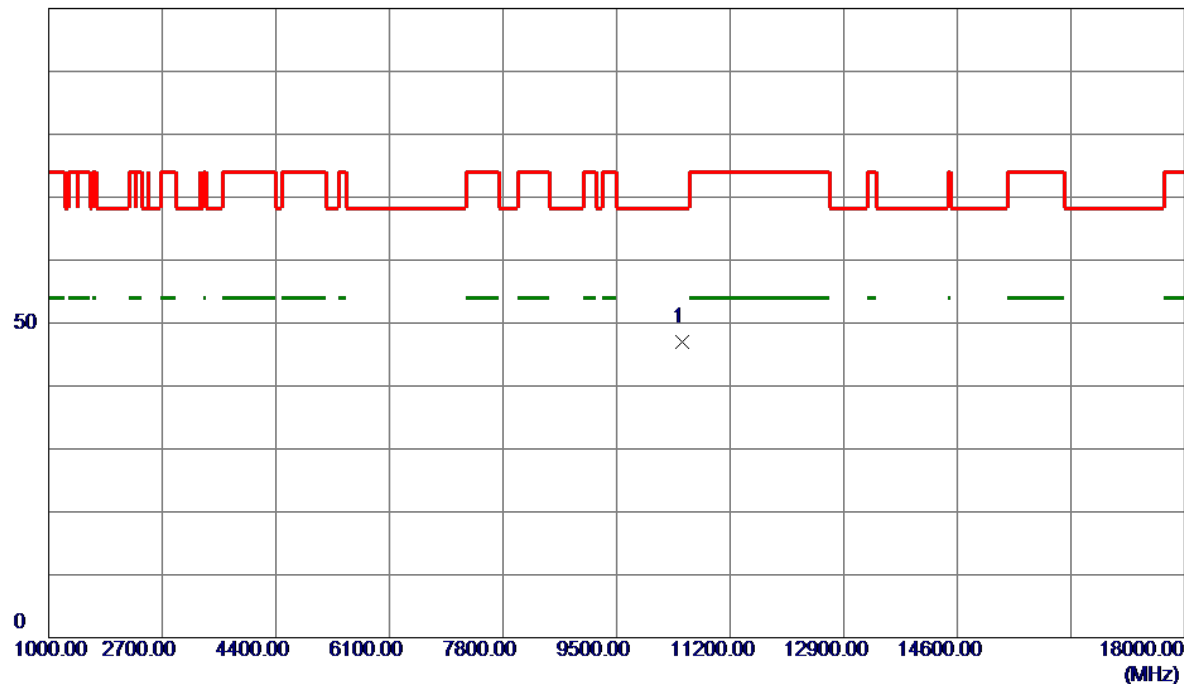


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10483.8000	37.76	9.18	46.94	68.20	-21.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

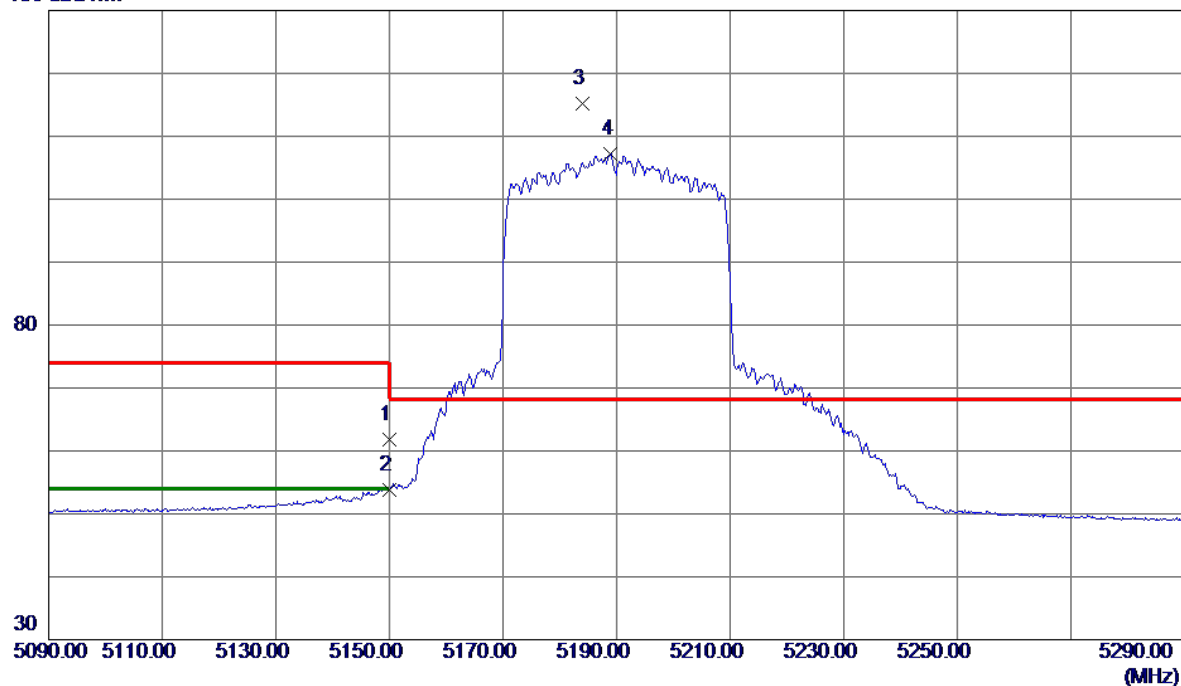


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.46	15.31	61.77	74.00	-12.23	Peak	
2	5150.0000	38.49	15.31	53.80	54.00	-0.20	AVG	
3 *	5184.0000	99.76	15.38	115.14	68.20	46.94	Peak	No Limit
4	5189.0000	91.72	15.39	107.11	999.00	-891.89	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

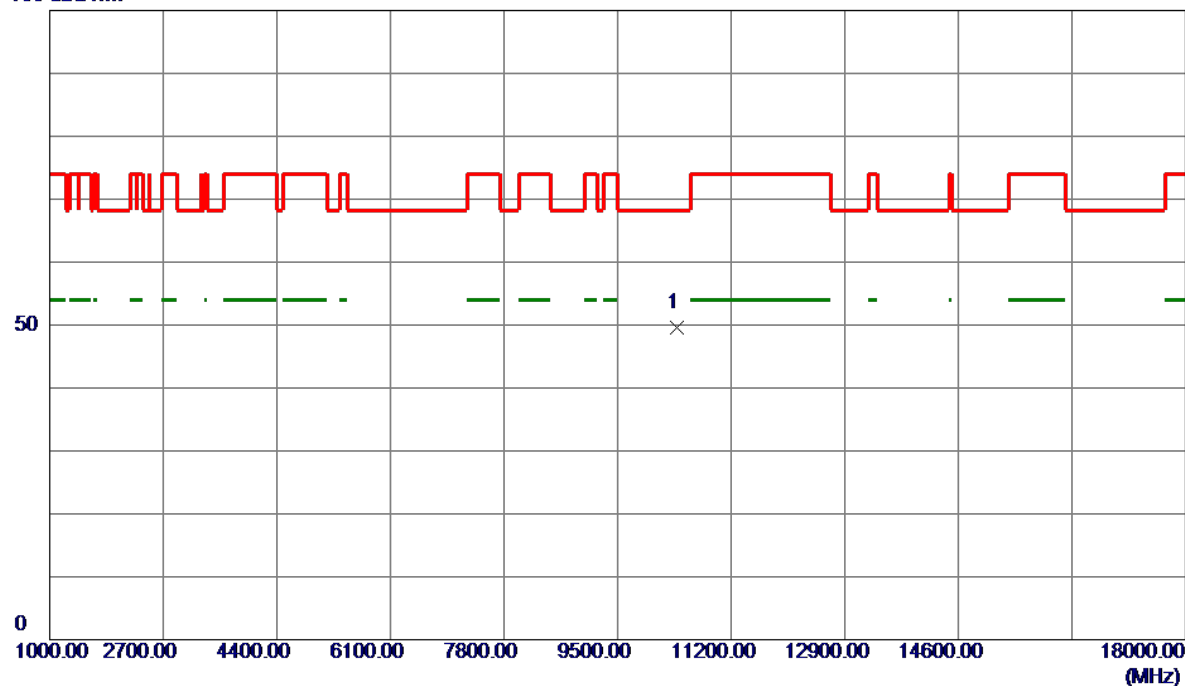


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10379.2900	40.55	9.07	49.62	68.20	-18.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

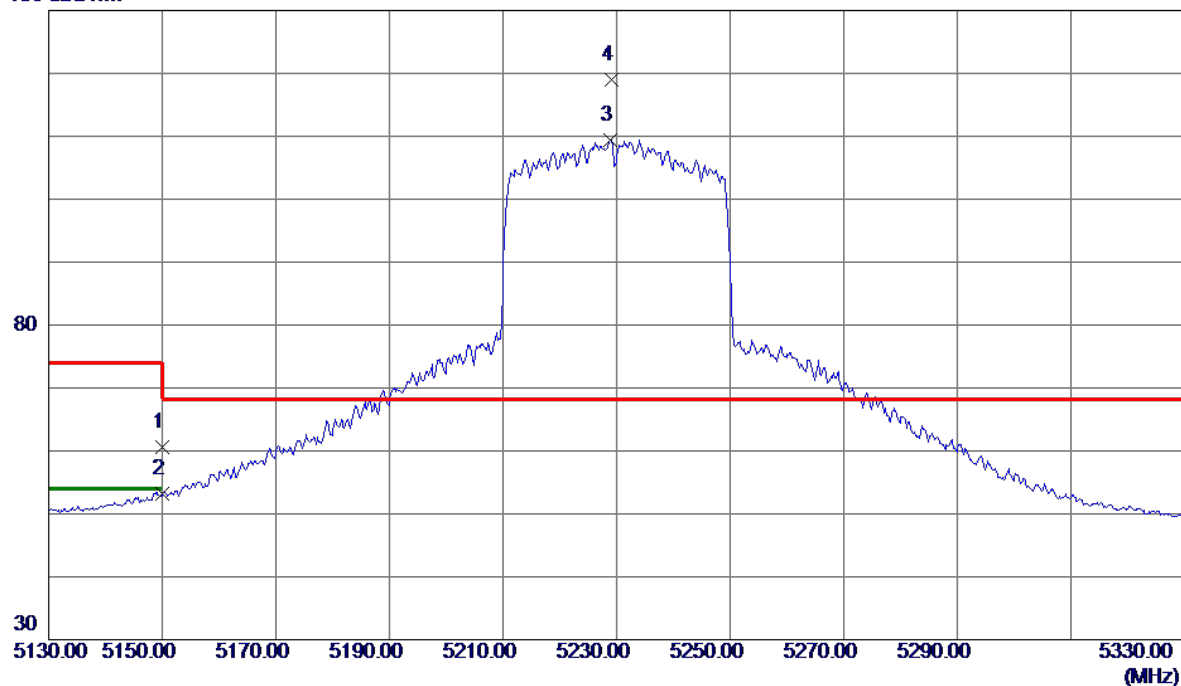


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.34	15.31	60.65	74.00	-13.35	Peak	
2	5150.0000	37.80	15.31	53.11	54.00	-0.89	AVG	
3	5228.8000	94.00	15.48	109.48	999.00	-889.52	AVG	No Limit
4 *	5229.1000	103.62	15.48	119.10	68.20	50.90	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

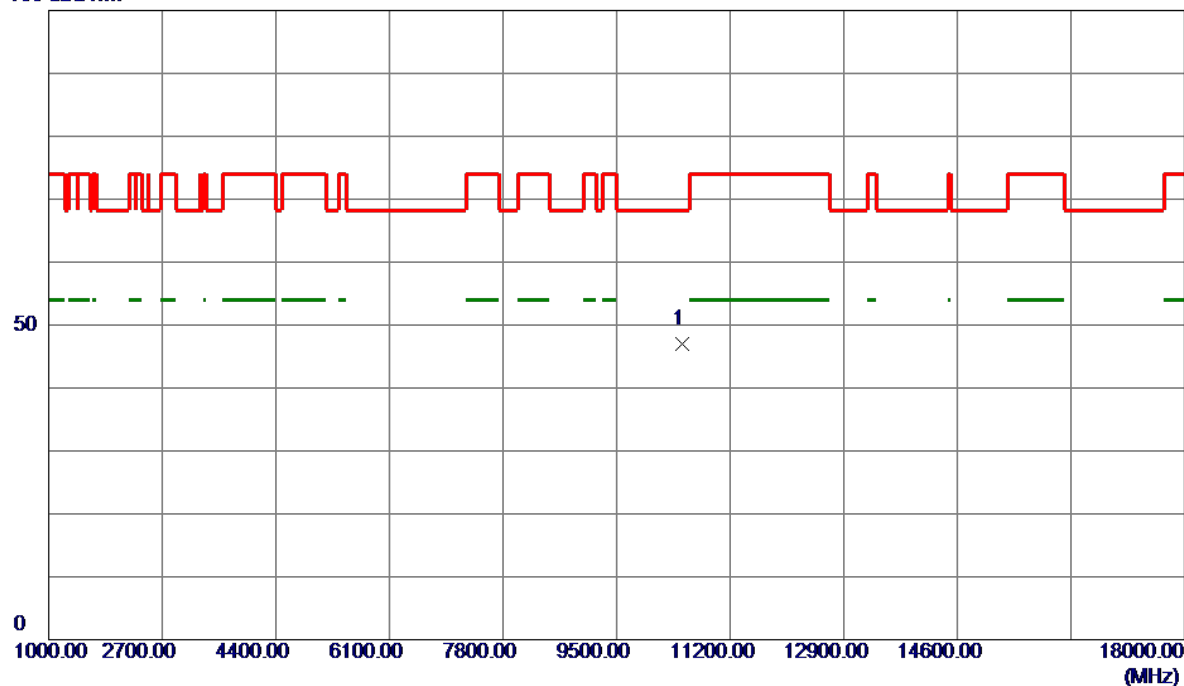


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10476.3620	37.89	9.17	47.06	68.20	-21.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

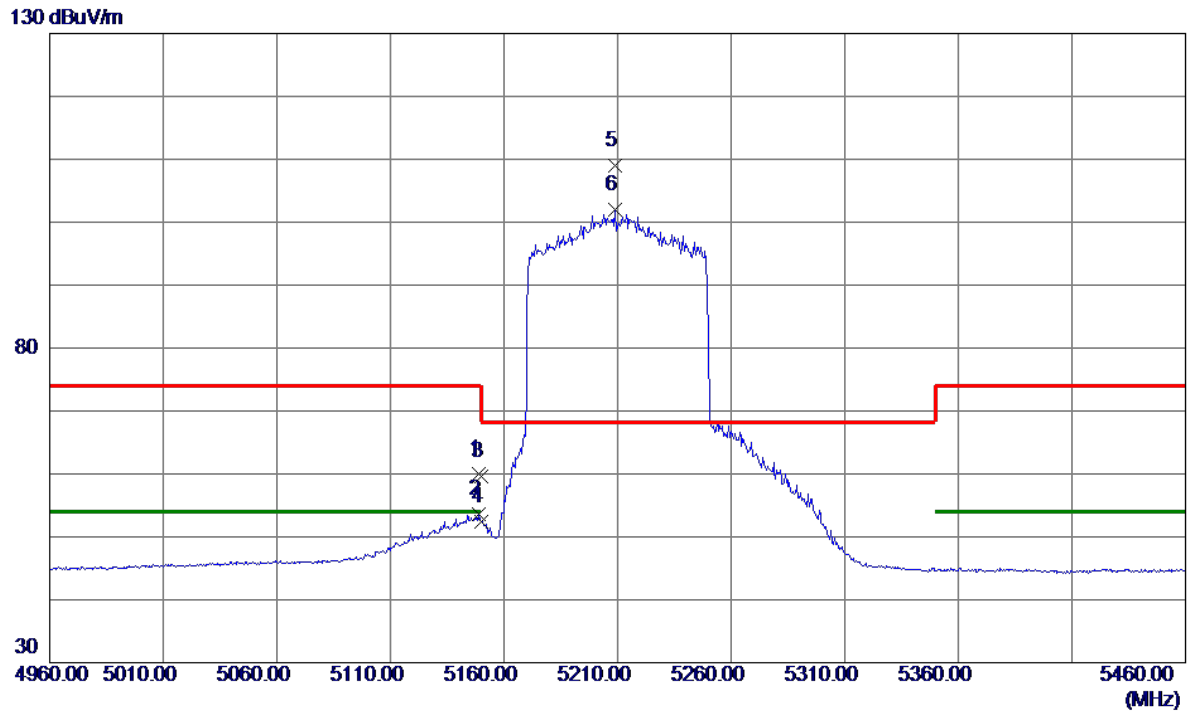

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.0000	44.73	15.31	60.04	74.00	-13.96	Peak	
2	5149.0000	38.20	15.31	53.51	54.00	-0.49	AVG	
3	5150.0000	44.29	15.31	59.60	74.00	-14.40	Peak	
4	5150.0000	37.07	15.31	52.38	54.00	-1.62	AVG	
5 *	5208.7500	93.62	15.43	109.05	68.20	40.85	Peak	No Limit
6	5208.7500	86.54	15.43	101.97	999.00	-897.03	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

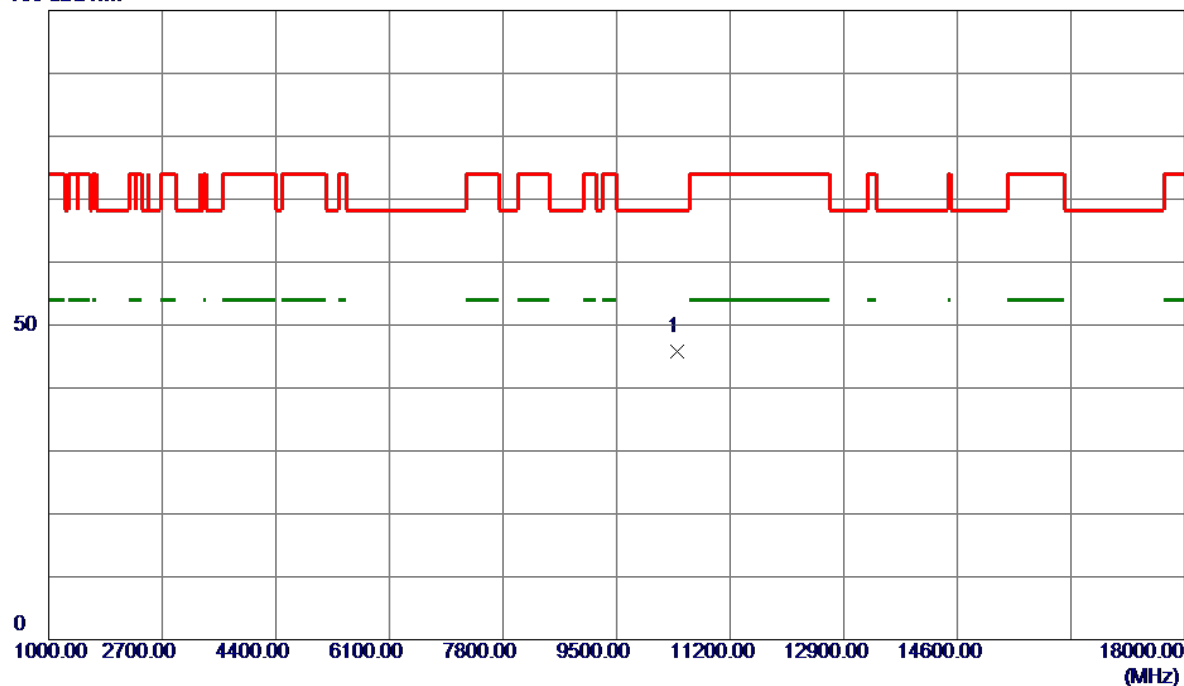


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10406.0000	36.77	9.10	45.87	68.20	-22.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

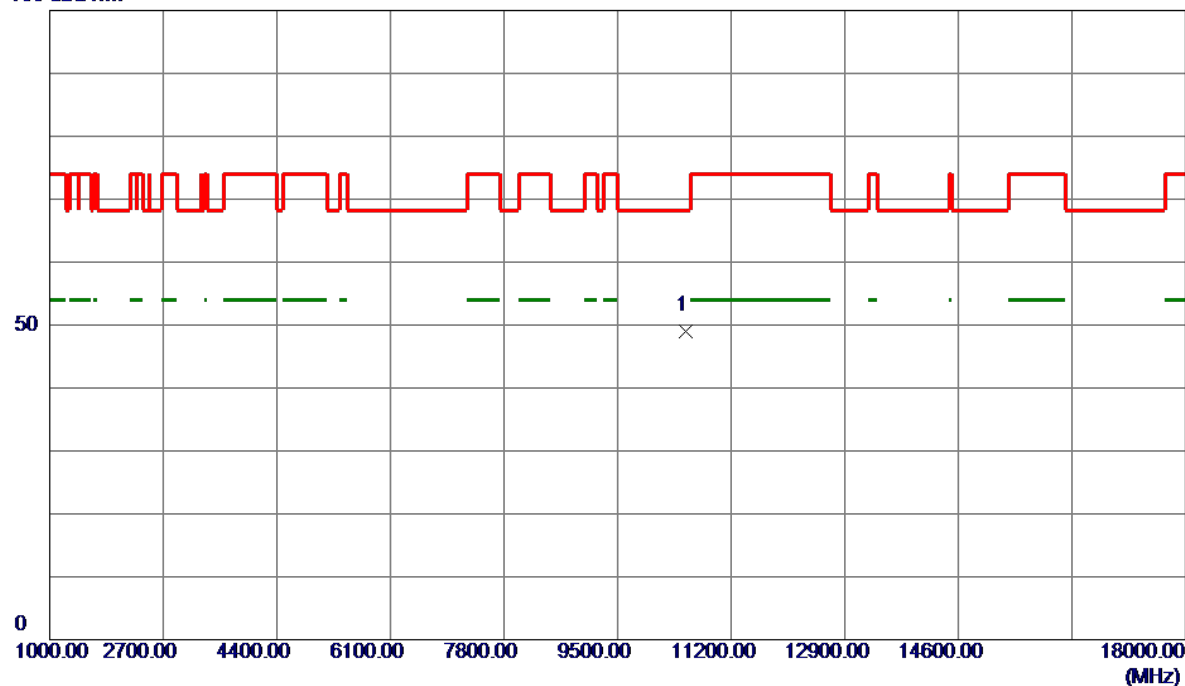


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	39.90	9.20	49.10	68.20	-19.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

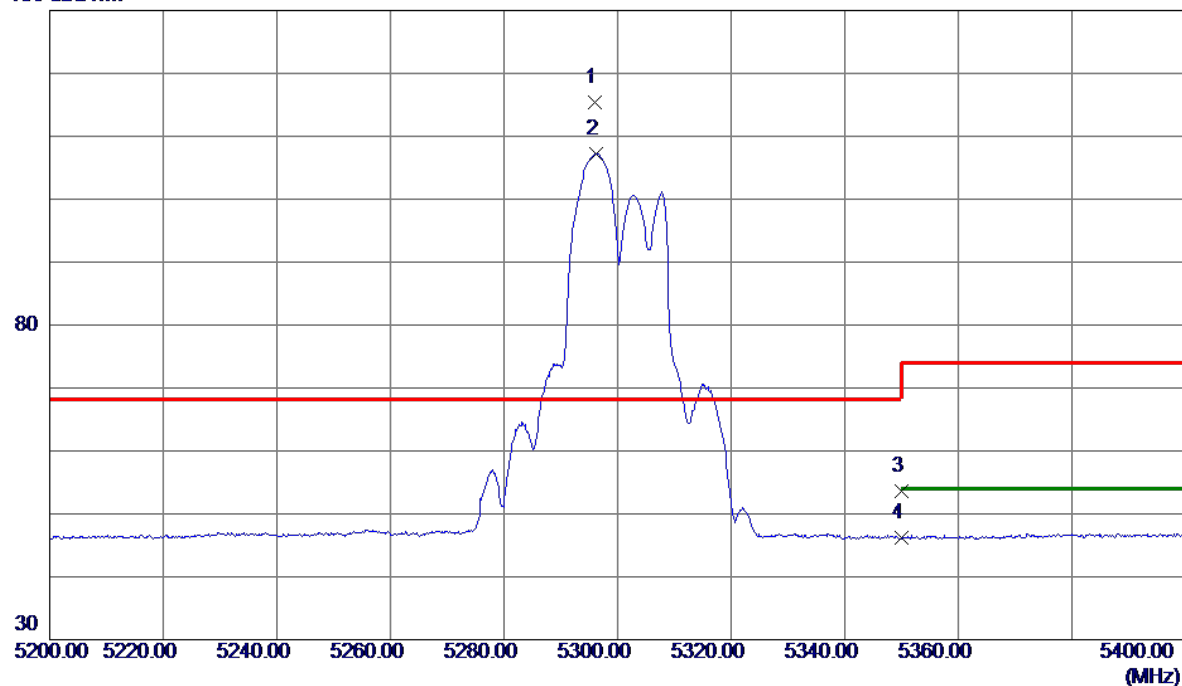


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5296.0000	101.72	13.75	115.47	68.20	47.27	Peak	No Limit
2	5296.3000	93.51	13.75	107.26	999.00	-891.74	AVG	No Limit
3	5350.0000	39.71	13.86	53.57	74.00	-20.43	Peak	
4	5350.0000	32.40	13.86	46.26	54.00	-7.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

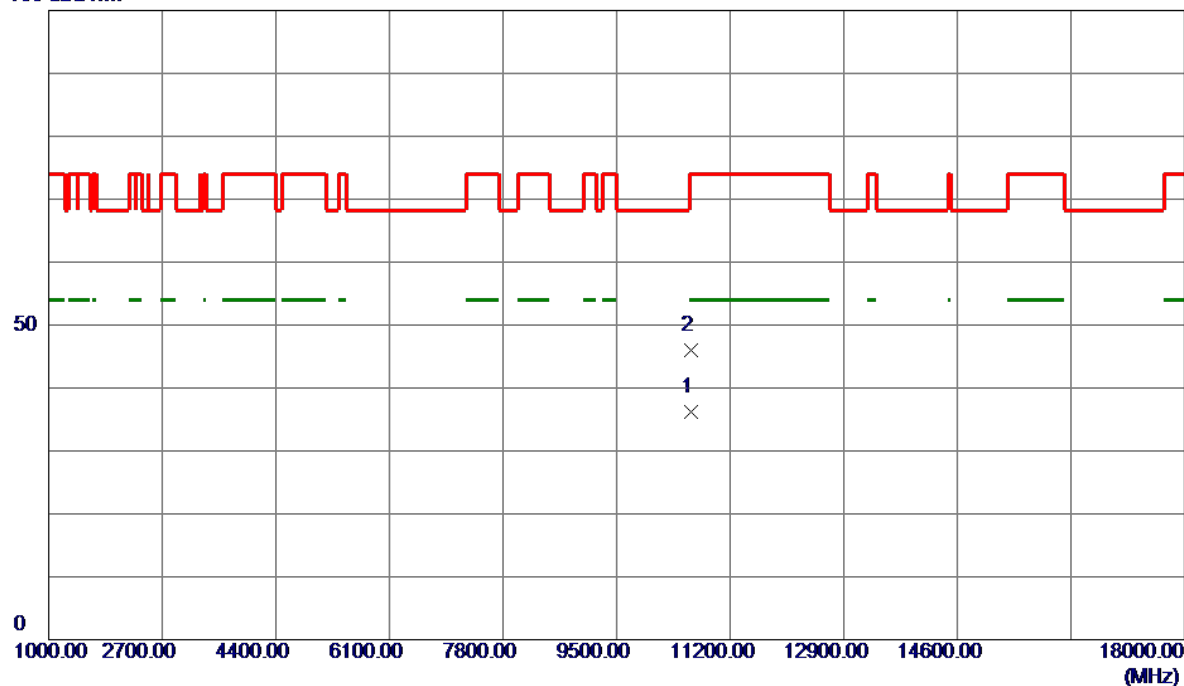


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10605.1000	27.06	9.19	36.25	54.00	-17.75	AVG	
2	10605.9000	36.77	9.19	45.96	74.00	-28.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

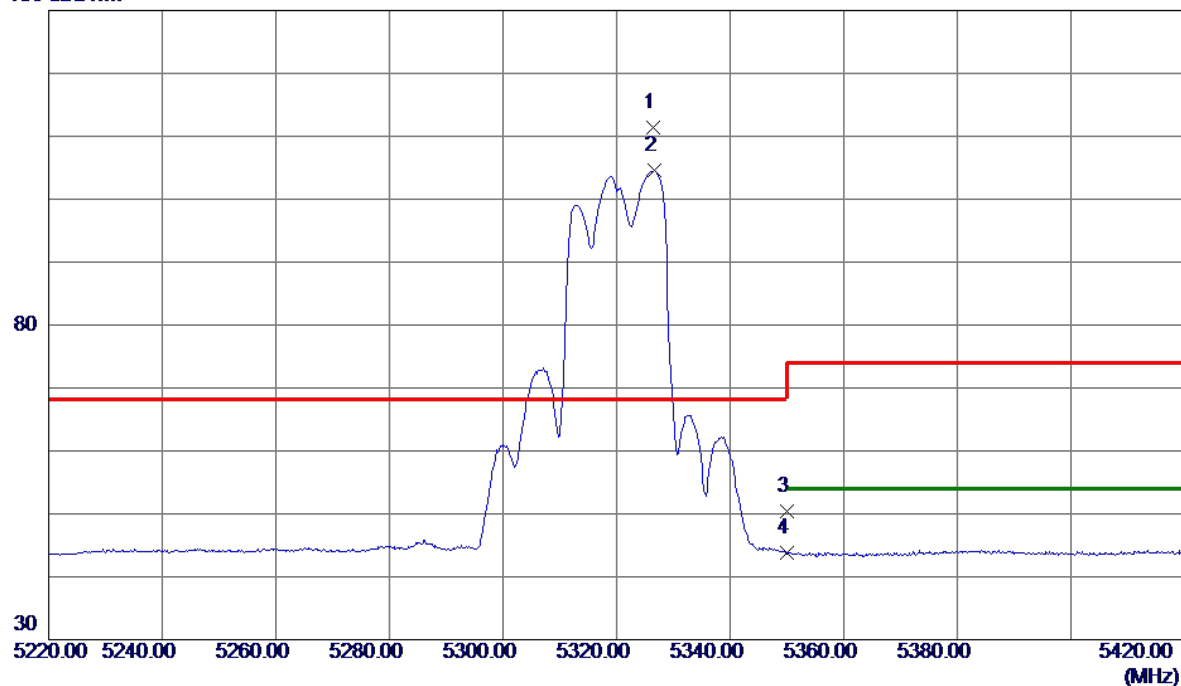


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5326.4000	97.51	13.81	111.32	68.20	43.12	Peak	No Limit
2	5326.7000	90.74	13.81	104.55	999.00	-894.45	AVG	No Limit
3	5350.0000	36.60	13.86	50.46	74.00	-23.54	Peak	
4	5350.0000	29.86	13.86	43.72	54.00	-10.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

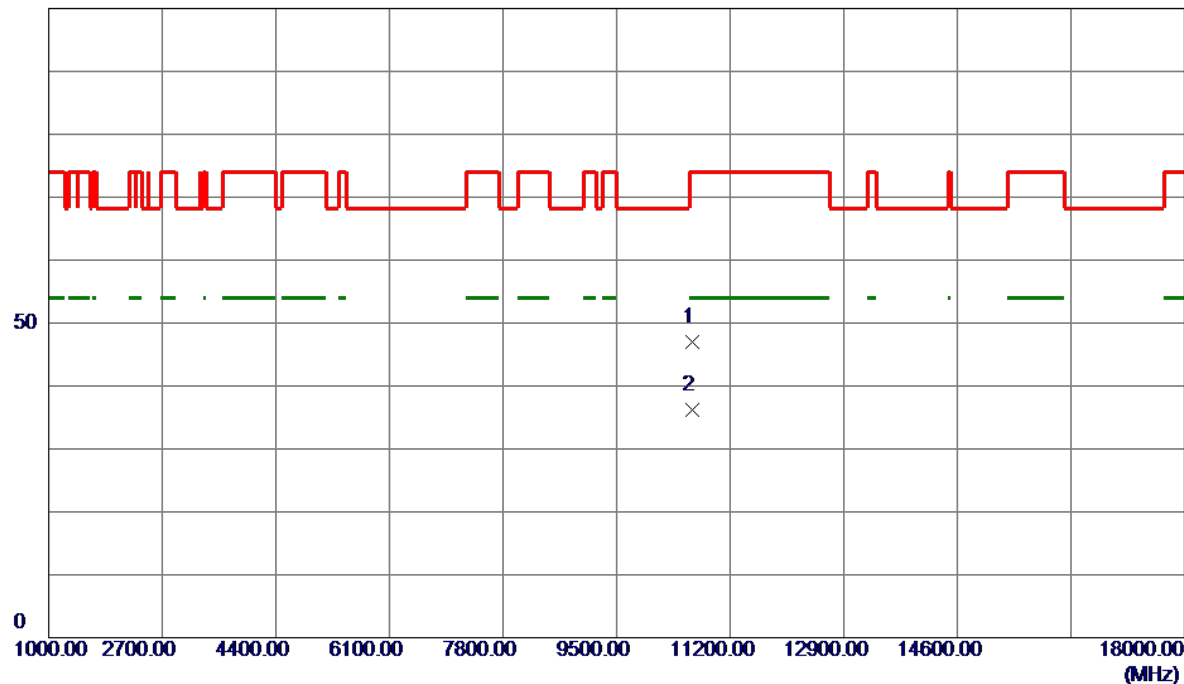


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.4000	37.83	9.18	47.01	74.00	-26.99	Peak	
2 *	10640.8500	27.01	9.18	36.19	54.00	-17.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

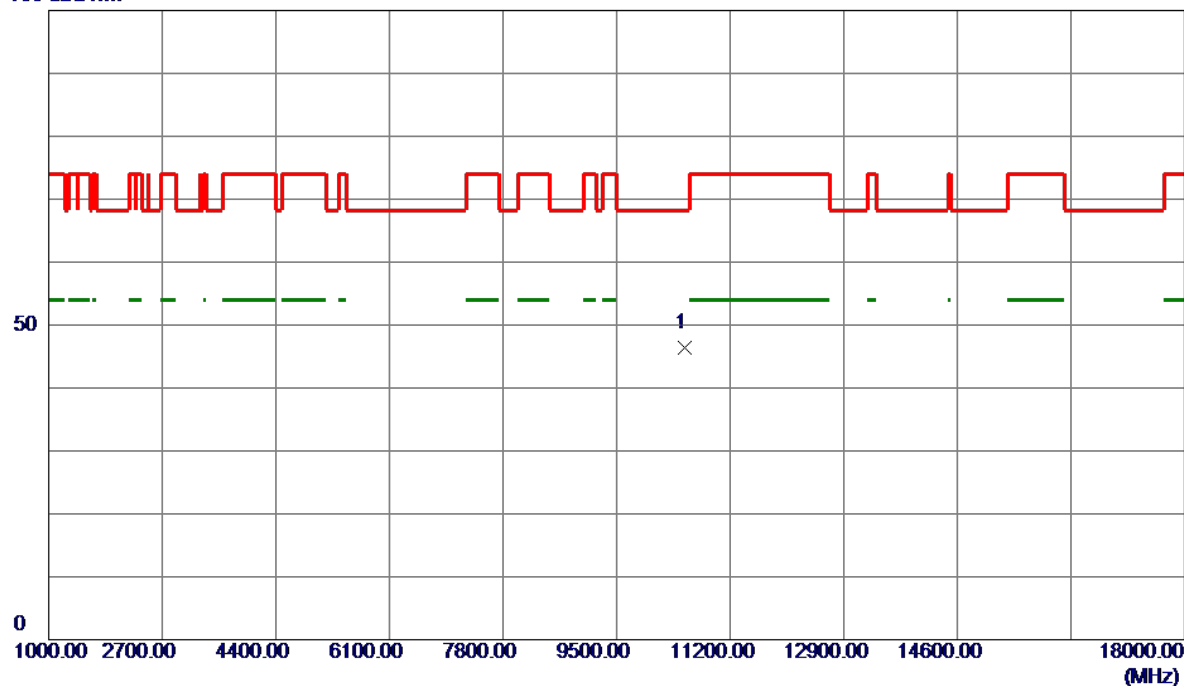


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10518.2250	37.25	9.20	46.45	68.20	-21.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

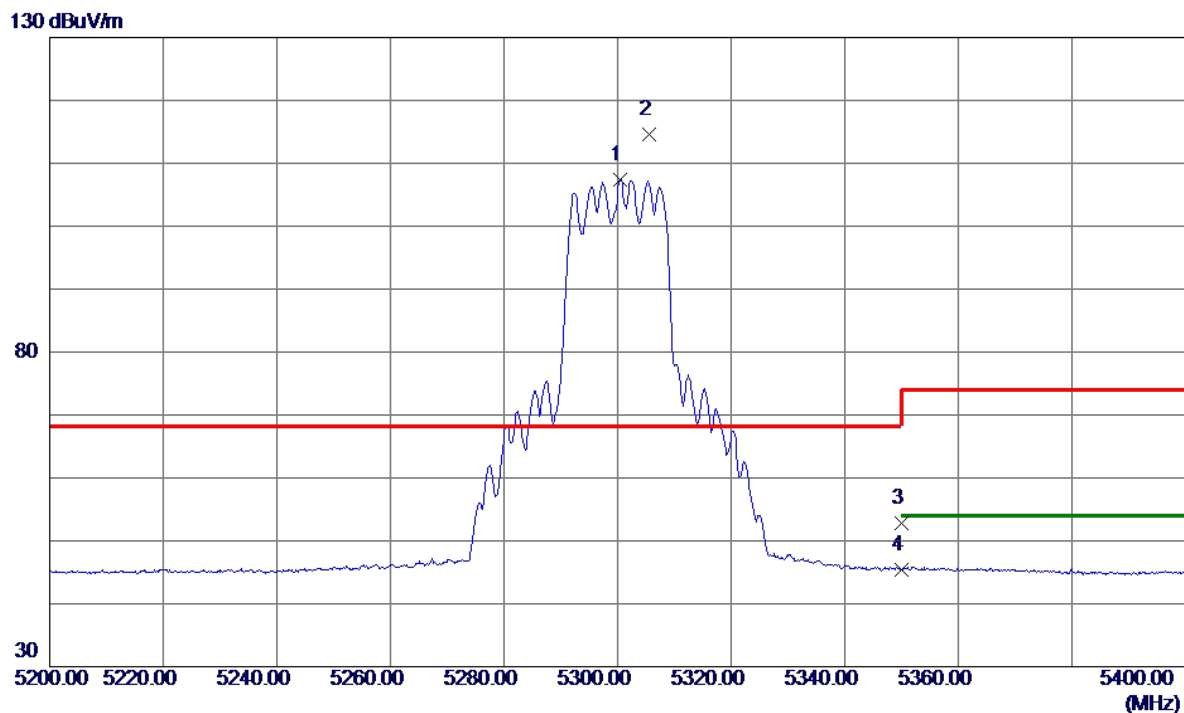


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.4000	93.66	13.75	107.41	999.00	-891.59	AVG	No Limit
2 *	5305.5000	100.74	13.77	114.51	68.20	46.31	Peak	No Limit
3	5350.0000	38.99	13.86	52.85	74.00	-21.15	Peak	
4	5350.0000	31.51	13.86	45.37	54.00	-8.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

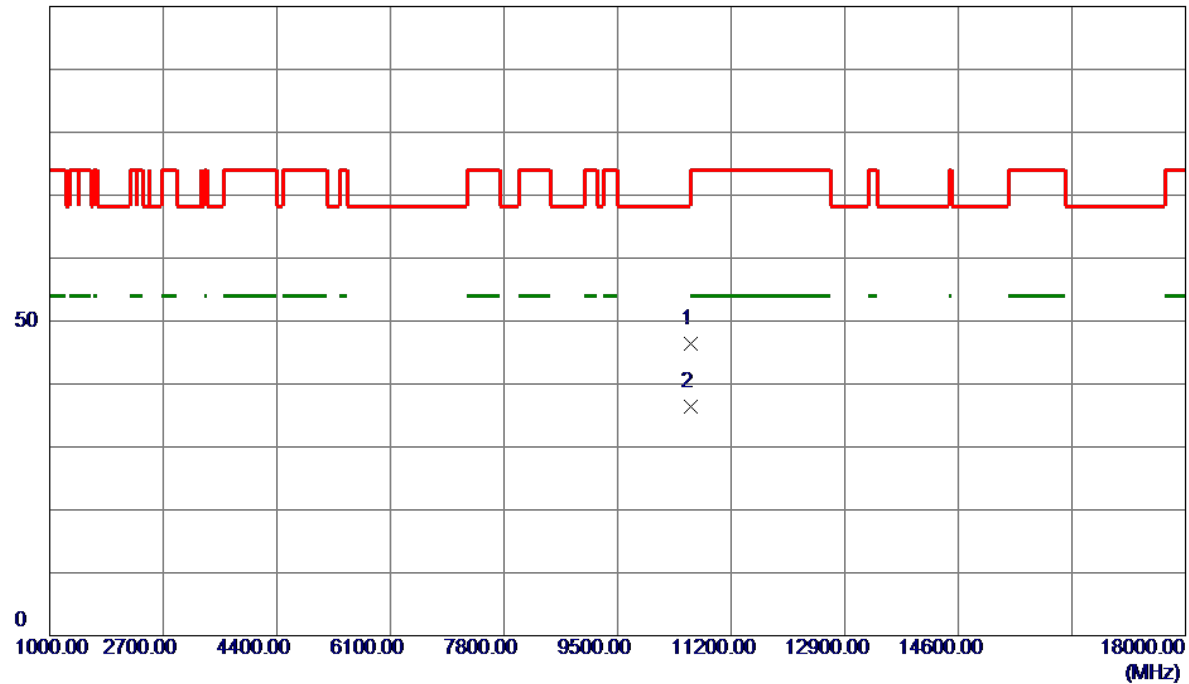


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10601.0250	37.30	9.19	46.49	74.00	-27.51	Peak	
2 *	10603.7500	27.17	9.19	36.36	54.00	-17.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

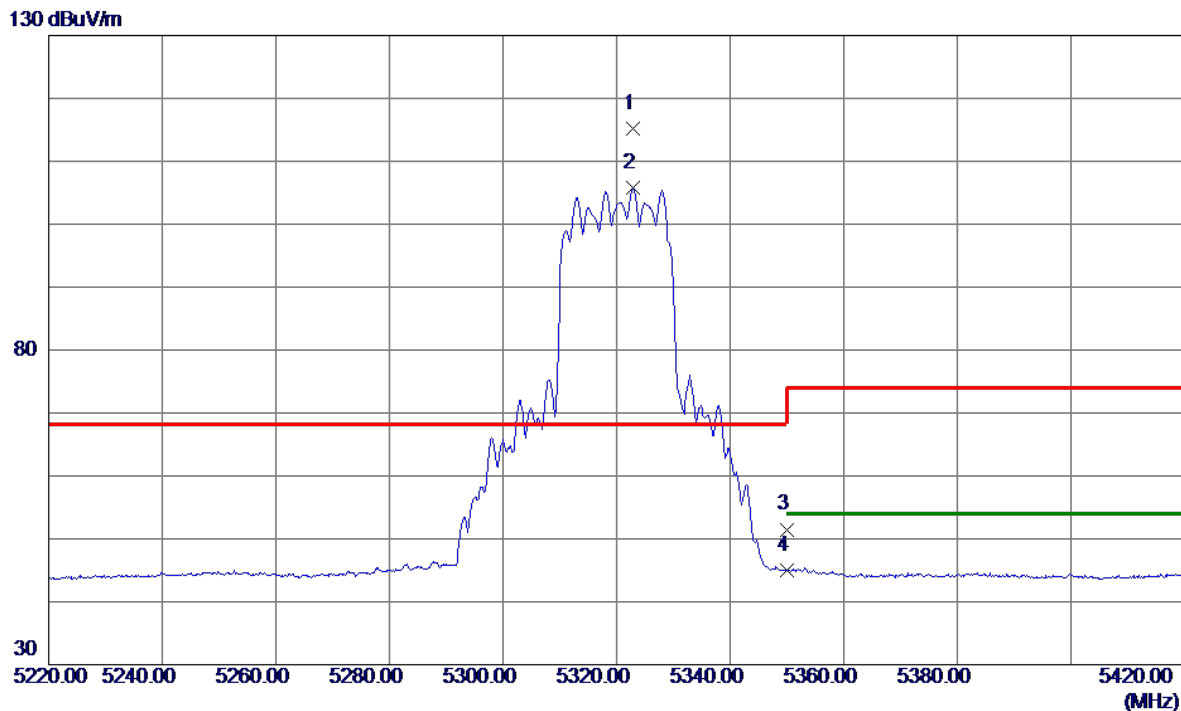


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5322.8000	101.38	13.80	115.18	68.20	46.98	Peak	No Limit
2	5322.9000	91.92	13.80	105.72	999.00	-893.28	AVG	No Limit
3	5350.0000	37.64	13.86	51.50	74.00	-22.50	Peak	
4	5350.0000	31.16	13.86	45.02	54.00	-8.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

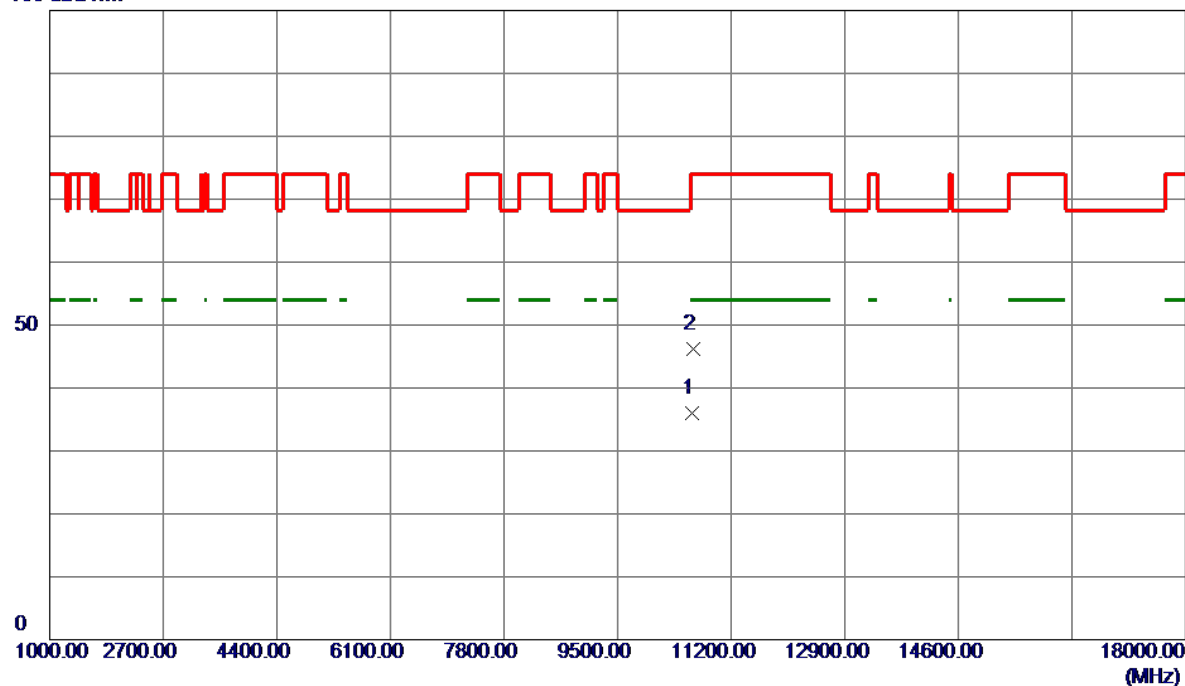


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10616.2500	26.87	9.18	36.05	54.00	-17.95	AVG	
2	10631.0750	36.94	9.18	46.12	74.00	-27.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

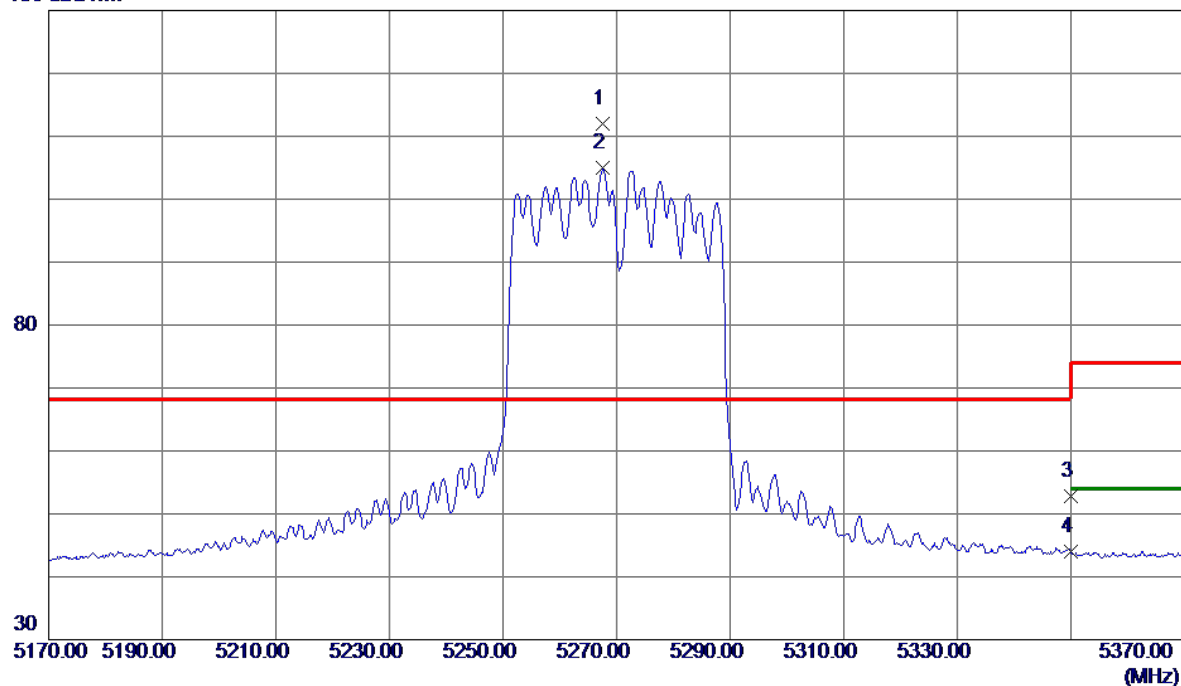


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5267.6000	98.40	13.68	112.08	68.20	43.88	Peak	No Limit
2	5267.6000	91.25	13.68	104.93	999.00	-894.07	AVG	No Limit
3	5350.0000	38.89	13.86	52.75	74.00	-21.25	Peak	
4	5350.0000	30.18	13.86	44.04	54.00	-9.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

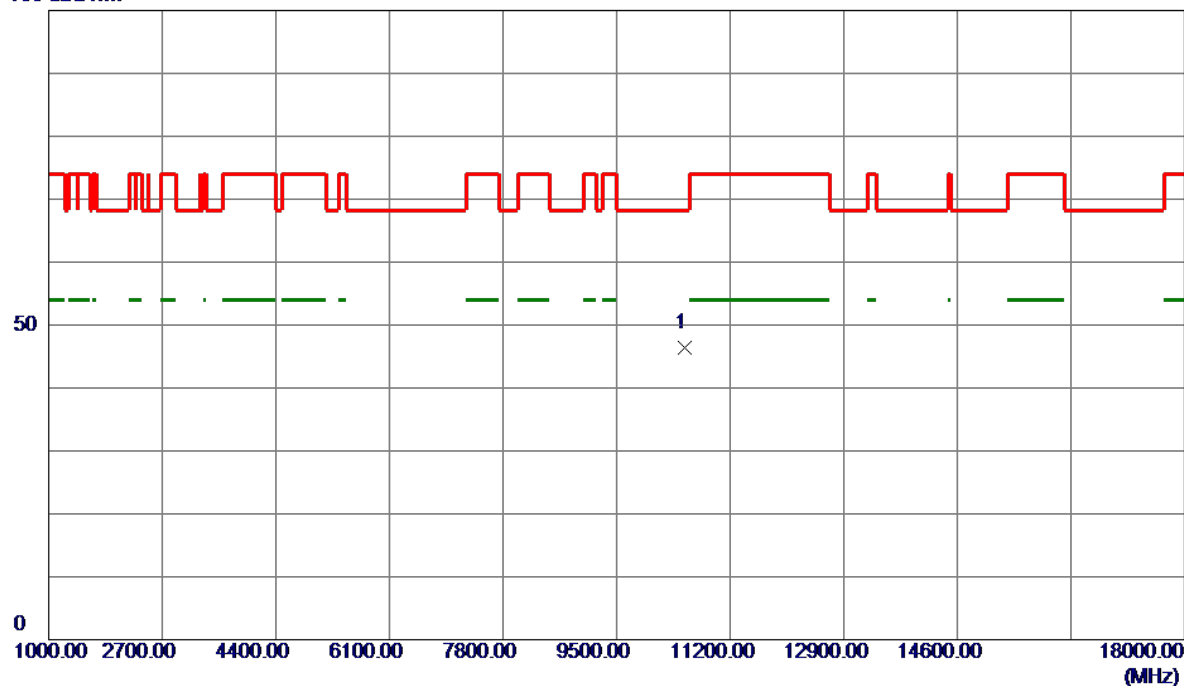


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.8250	37.23	9.20	46.43	68.20	-21.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

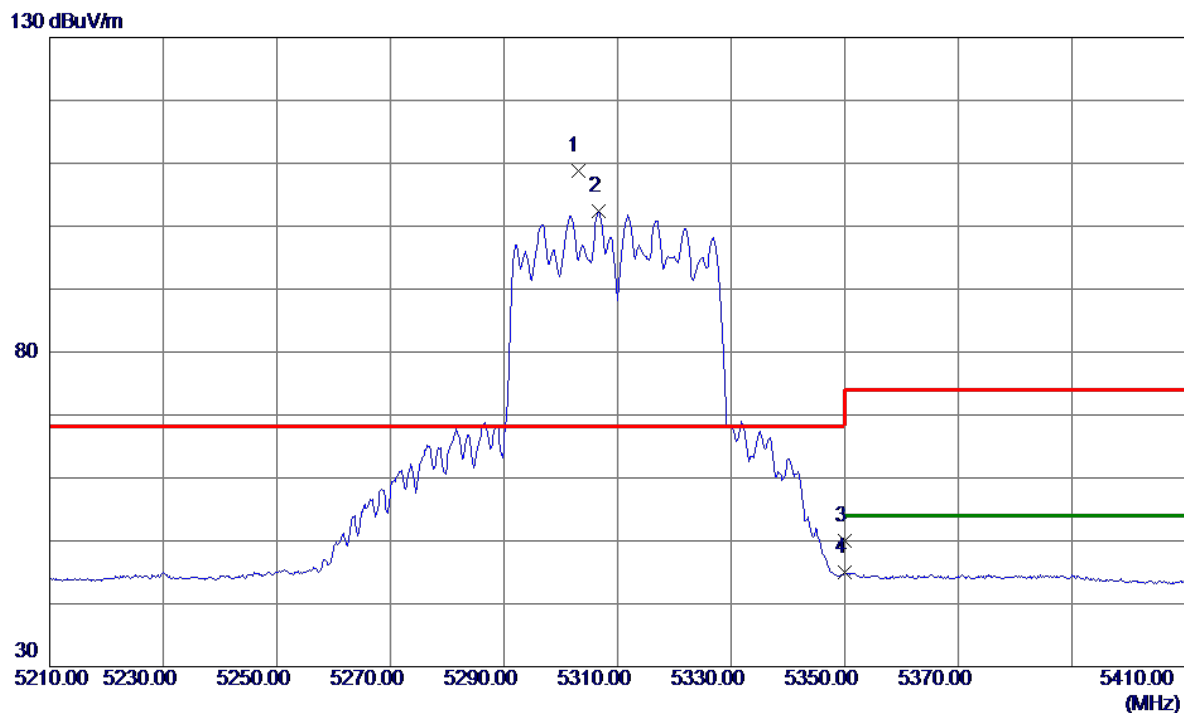


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5303.0000	95.02	13.76	108.78	68.20	40.58	Peak	No Limit
2	5306.7000	88.54	13.77	102.31	999.00	-896.69	AVG	No Limit
3	5350.0000	36.12	13.86	49.98	74.00	-24.02	Peak	
4	5350.0000	31.11	13.86	44.97	54.00	-9.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

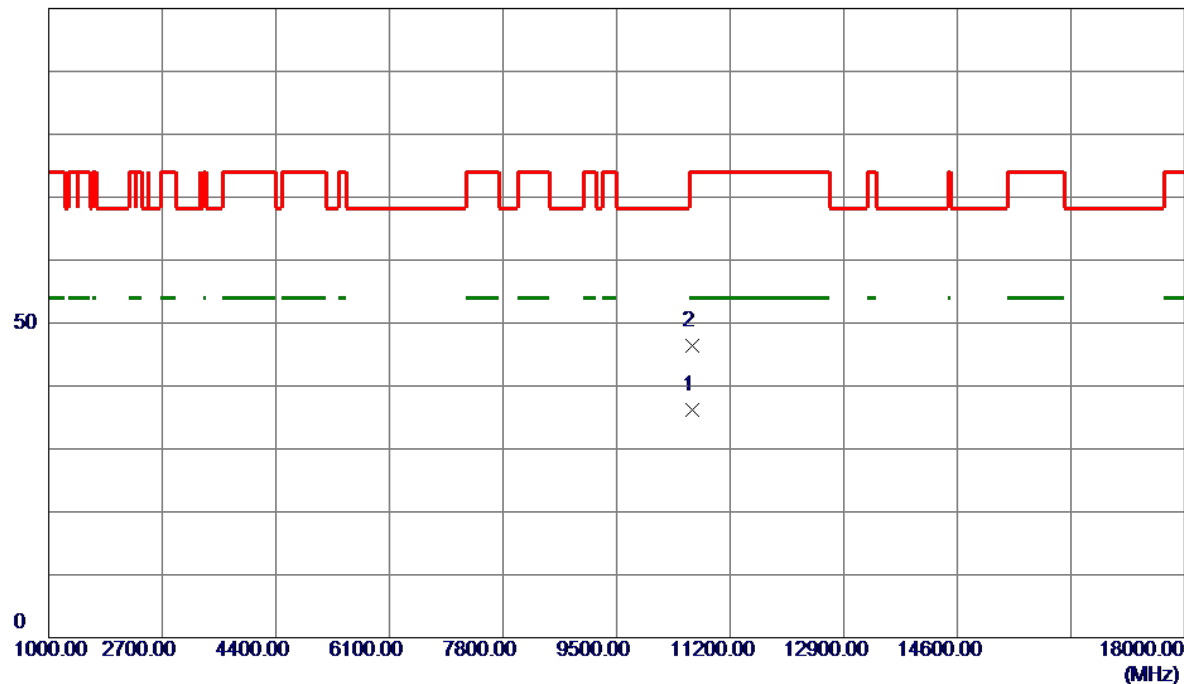


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10624.2500	26.93	9.18	36.11	54.00	-17.89	AVG	
2	10633.7000	37.13	9.18	46.31	74.00	-27.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

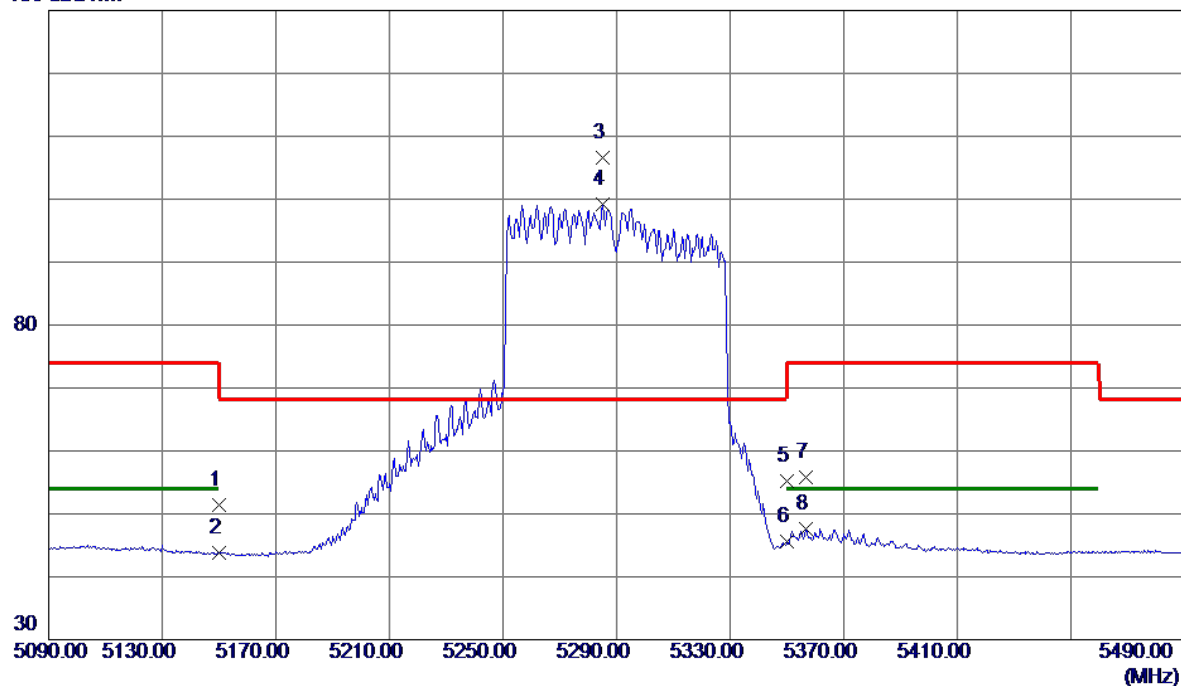


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.06	13.43	51.49	74.00	-22.51	Peak	
2	5150.0000	30.44	13.43	43.87	54.00	-10.13	AVG	
3 *	5285.0000	92.91	13.72	106.63	68.20	38.43	Peak	No Limit
4	5285.0000	85.50	13.72	99.22	999.00	-899.78	AVG	No Limit
5	5350.0000	41.35	13.86	55.21	74.00	-18.79	Peak	
6	5350.0000	31.70	13.86	45.56	54.00	-8.44	AVG	
7	5356.8000	41.84	13.88	55.72	74.00	-18.28	Peak	
8	5356.8000	33.74	13.88	47.62	54.00	-6.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

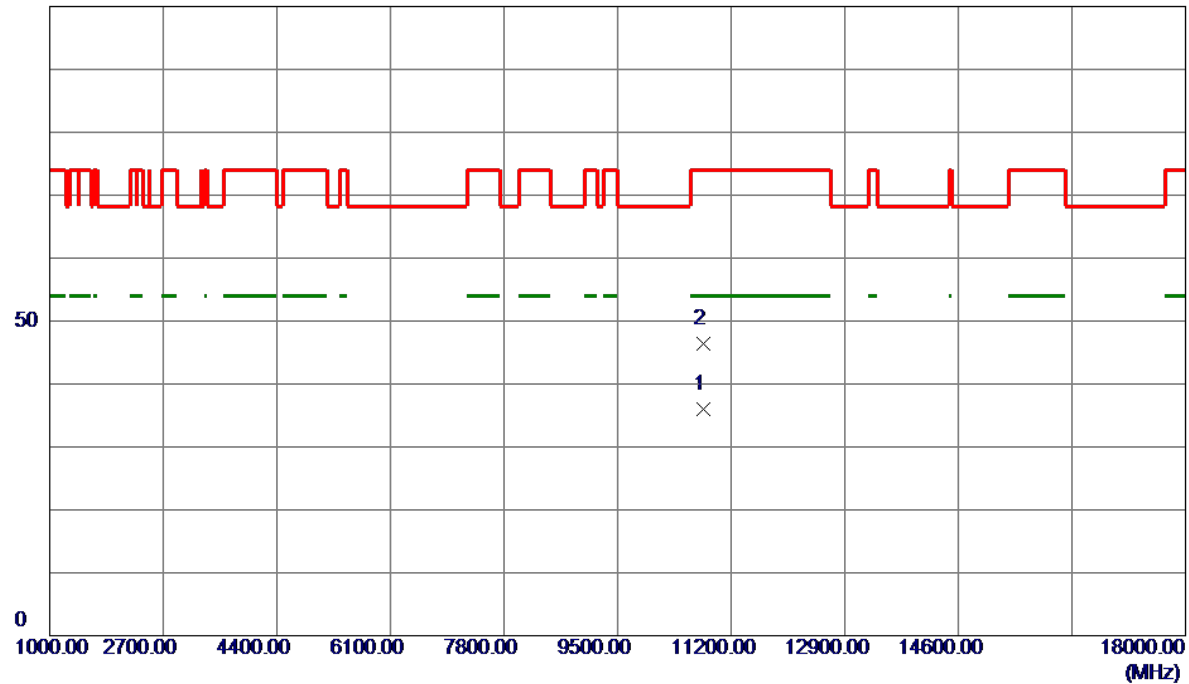


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10777.3940	26.93	9.16	36.09	54.00	-17.91	AVG	
2	10788.6660	37.23	9.16	46.39	74.00	-27.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

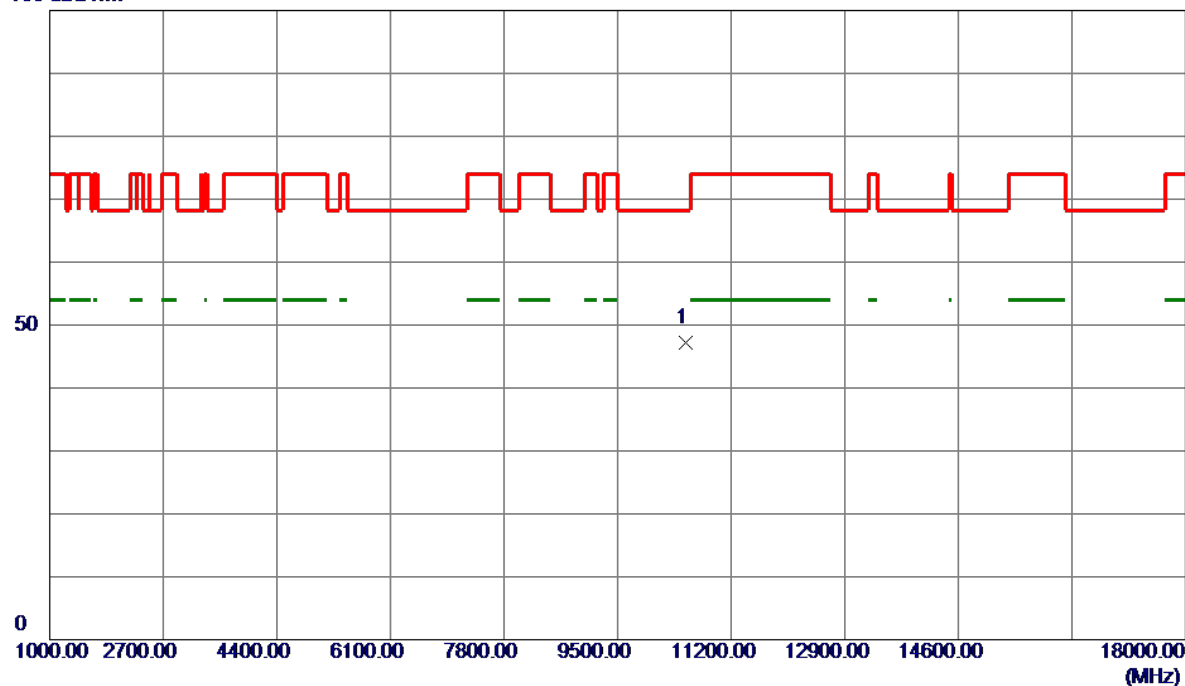


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10511.2800	37.94	9.20	47.14	68.20	-21.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

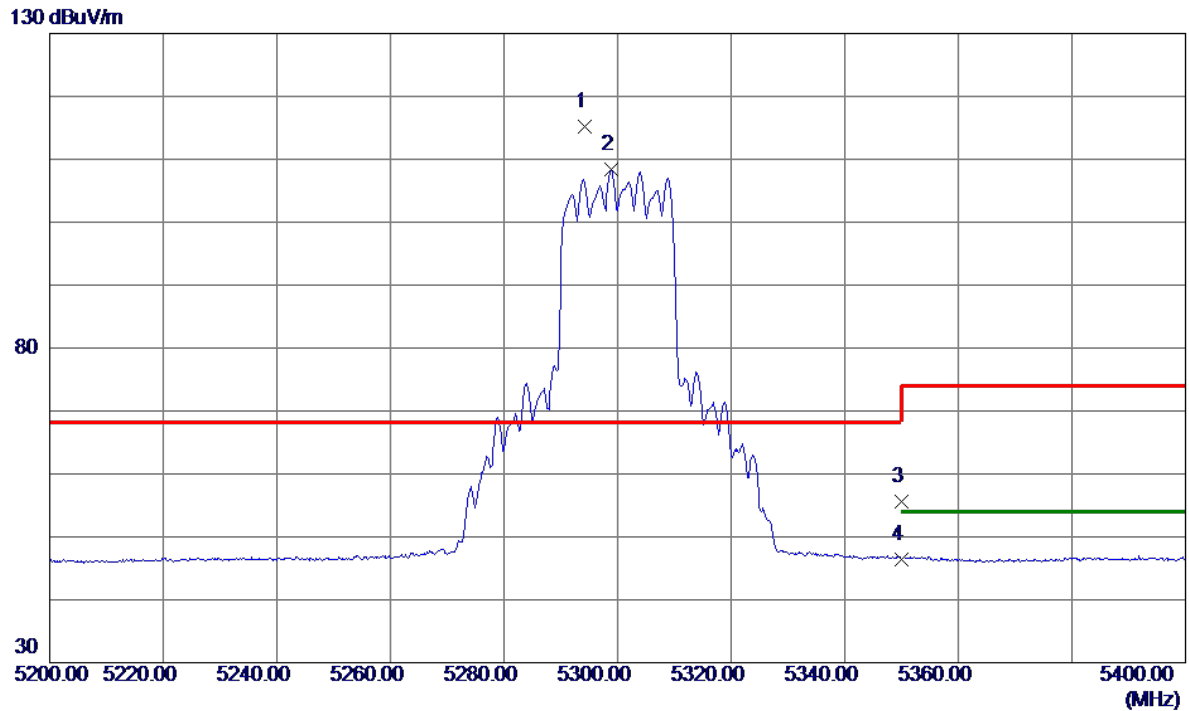


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5294.3000	101.38	13.74	115.12	68.20	46.92	Peak	No Limit
2	5298.9000	94.58	13.75	108.33	999.00	-890.67	AVG	No Limit
3	5350.0000	41.71	13.86	55.57	74.00	-18.43	Peak	
4	5350.0000	32.62	13.86	46.48	54.00	-7.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

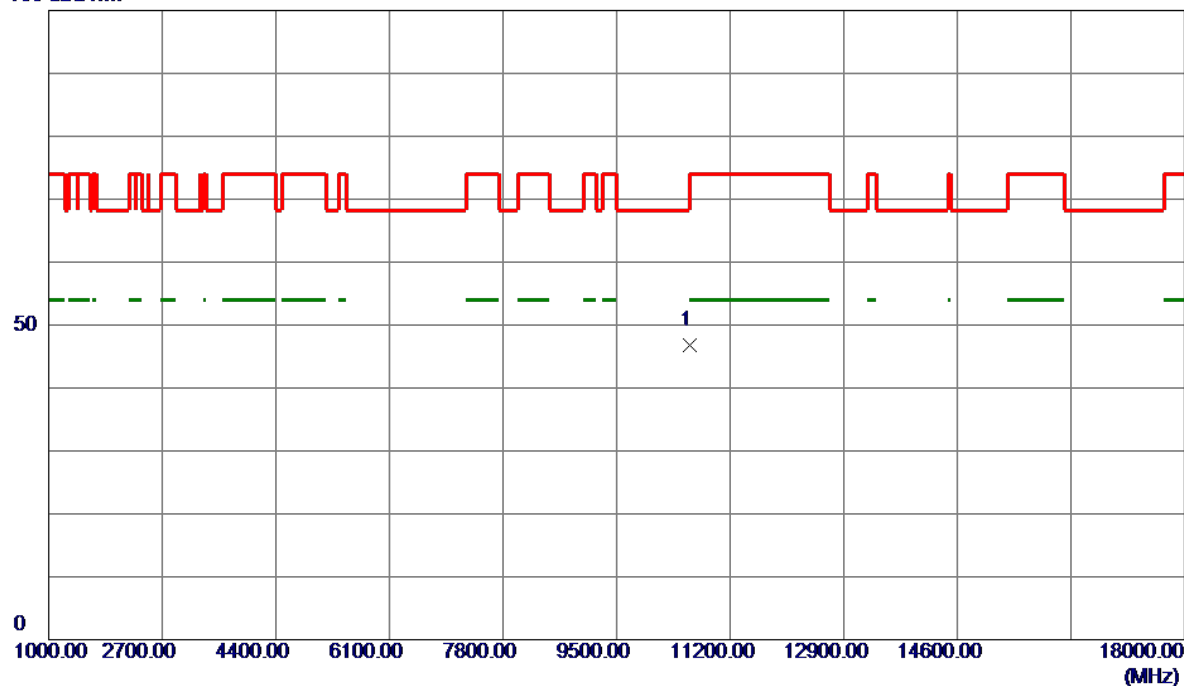


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10590.7200	37.70	9.19	46.89	68.20	-21.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

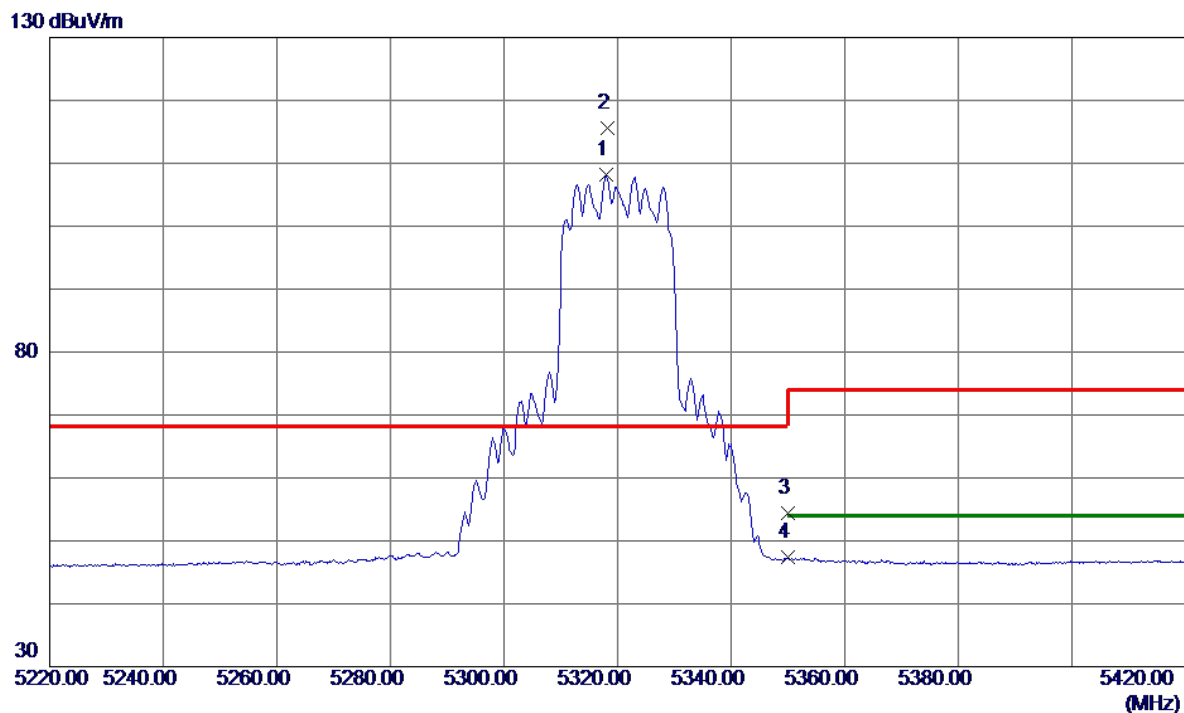


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5317.9000	94.33	13.79	108.12	999.00	-890.88	AVG	No Limit
2 *	5318.3000	101.77	13.79	115.56	68.20	47.36	Peak	No Limit
3	5350.0000	40.49	13.86	54.35	74.00	-19.65	Peak	
4	5350.0000	33.50	13.86	47.36	54.00	-6.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

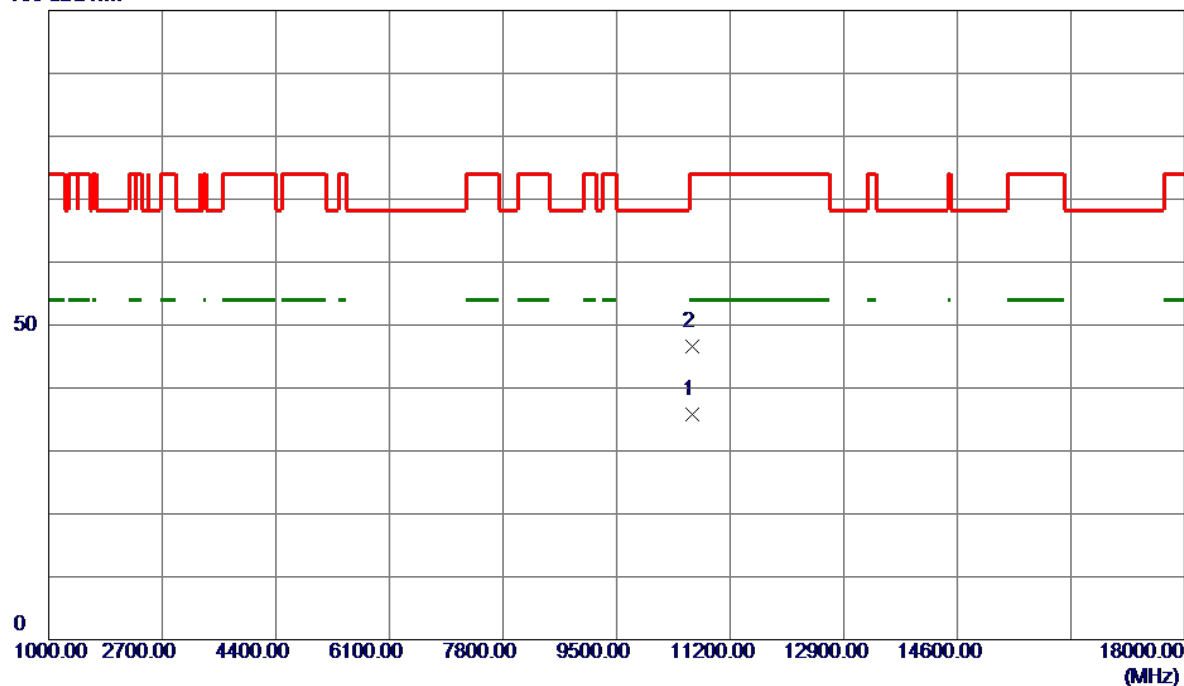


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10631.7100	26.60	9.18	35.78	54.00	-18.22	AVG	
2	10633.2200	37.42	9.18	46.60	74.00	-27.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

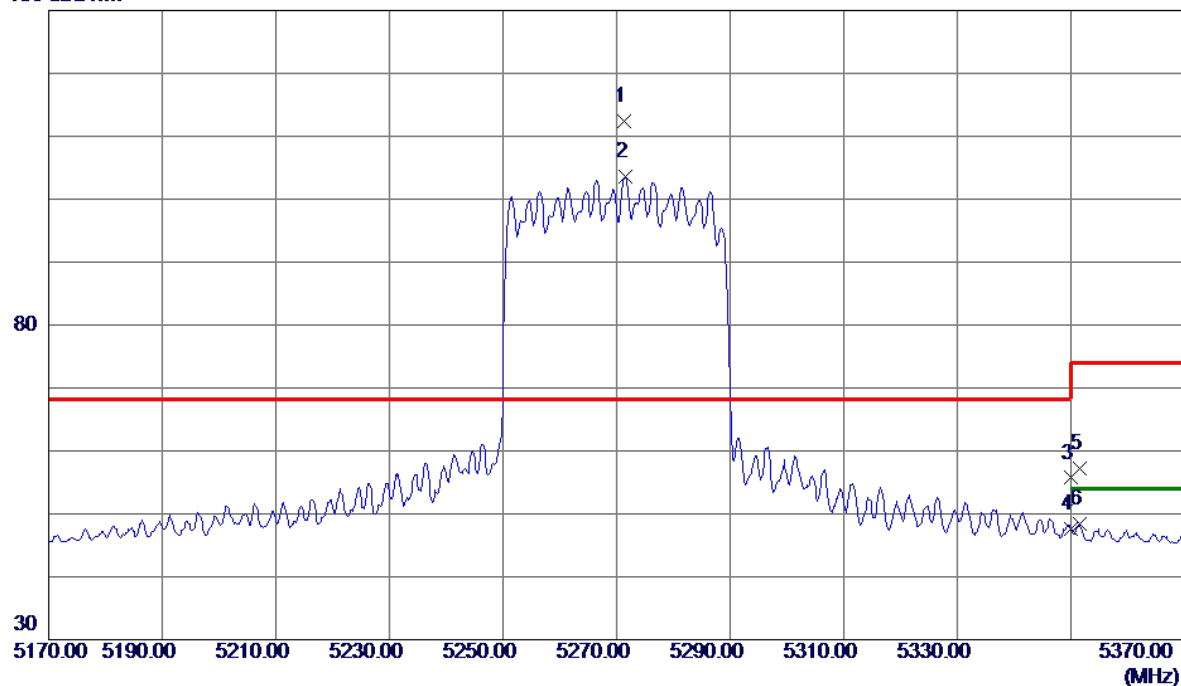


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5271.4000	98.66	13.69	112.35	68.20	44.15	Peak	No Limit
2	5271.5000	89.95	13.69	103.64	999.00	-895.36	AVG	No Limit
3	5350.0000	41.84	13.86	55.70	74.00	-18.30	Peak	
4	5350.0000	33.78	13.86	47.64	54.00	-6.36	AVG	
5	5351.6000	43.31	13.87	57.18	74.00	-16.82	Peak	
6	5351.6000	34.51	13.87	48.38	54.00	-5.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

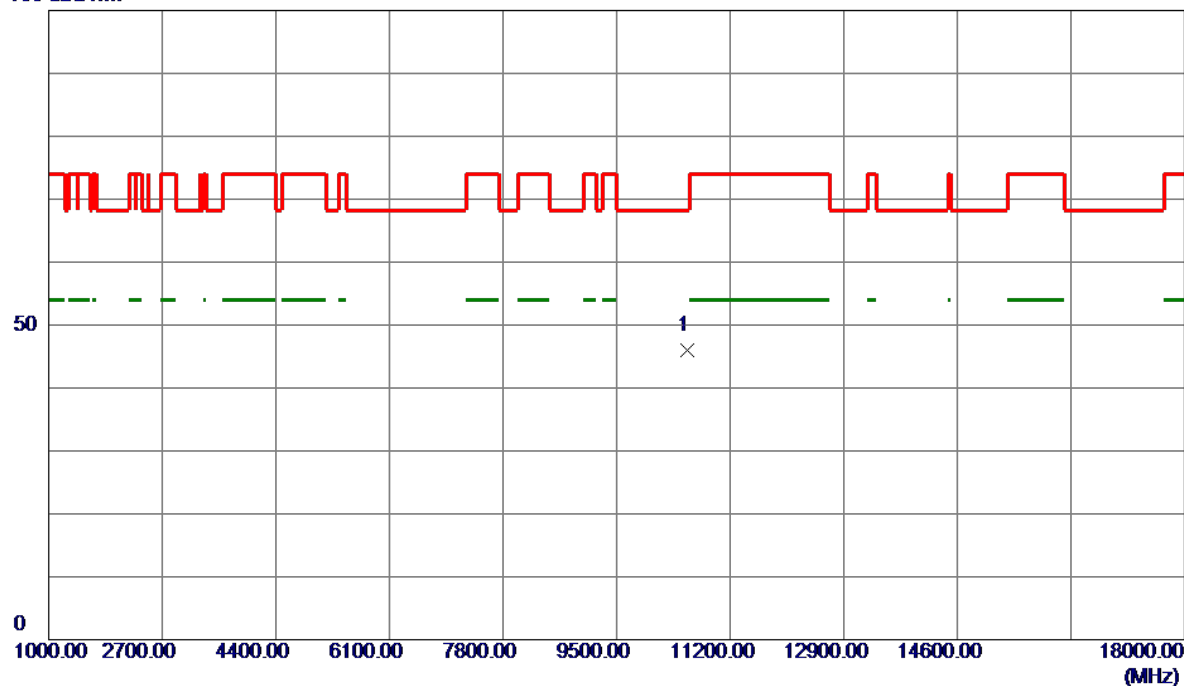


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10552.5000	36.80	9.19	45.99	68.20	-22.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

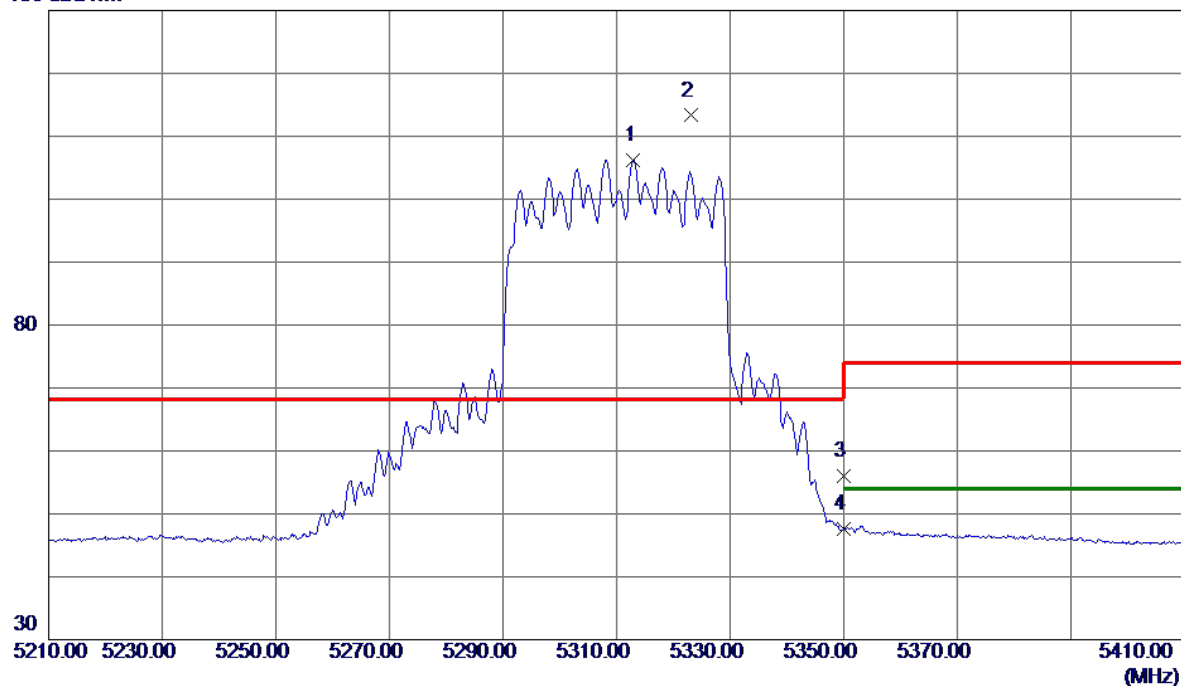


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5313.0000	92.47	13.78	106.25	999.00	-892.75	AVG	No Limit
2 *	5323.2000	99.50	13.80	113.30	68.20	45.10	Peak	No Limit
3	5350.0000	42.06	13.86	55.92	74.00	-18.08	Peak	
4	5350.0000	33.82	13.86	47.68	54.00	-6.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

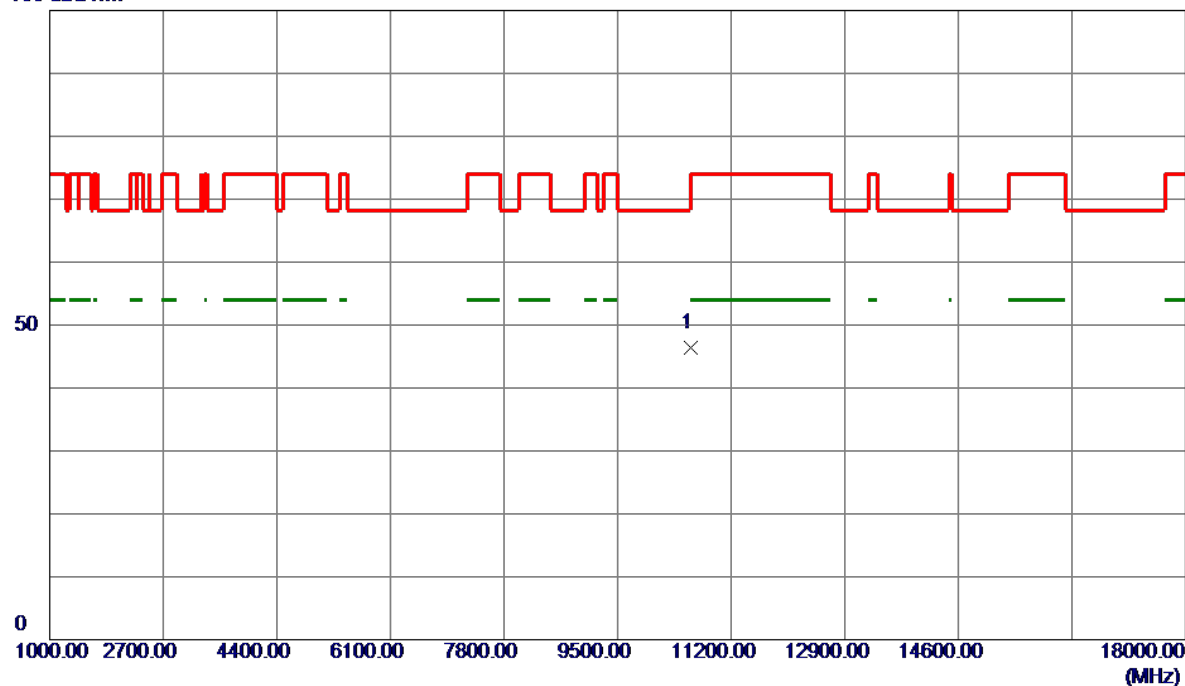


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10596.2250	37.22	9.19	46.41	68.20	-21.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

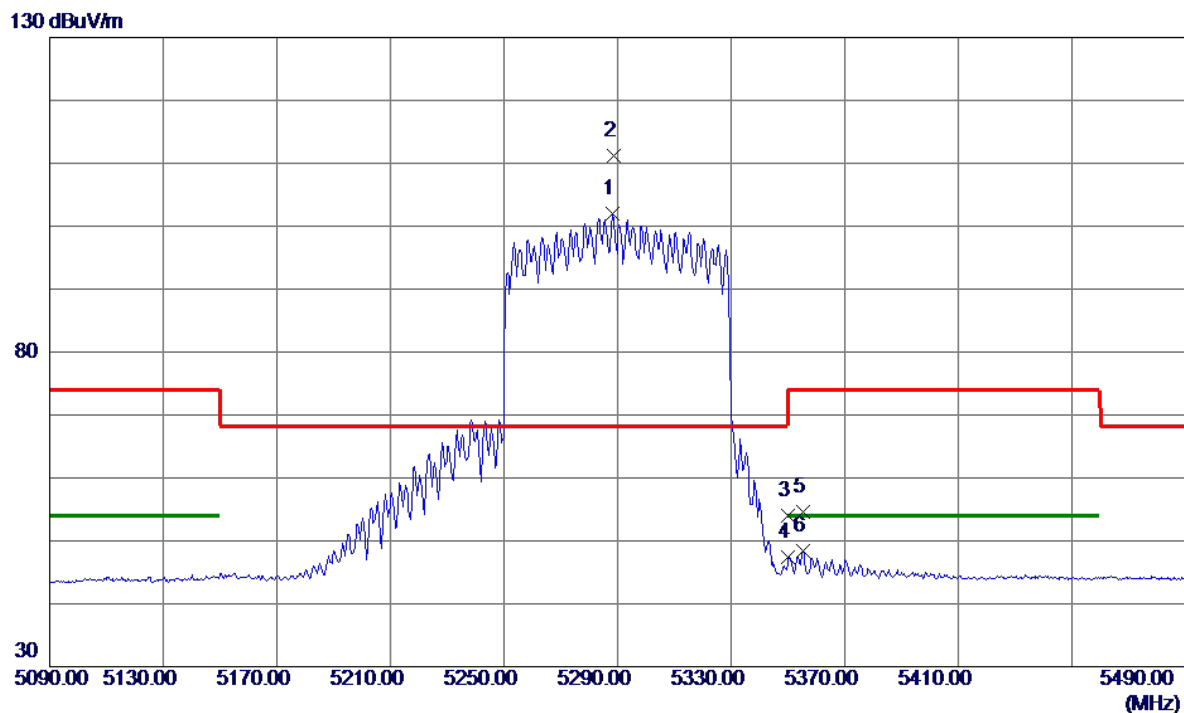


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5288.4000	88.21	13.73	101.94	999.00	-897.06	AVG	No Limit
2 *	5288.8000	97.47	13.73	111.20	68.20	43.00	Peak	No Limit
3	5350.0000	40.14	13.86	54.00	74.00	-20.00	Peak	
4	5350.0000	33.58	13.86	47.44	54.00	-6.56	AVG	
5	5355.2000	40.79	13.87	54.66	74.00	-19.34	Peak	
6	5355.2000	34.45	13.87	48.32	54.00	-5.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

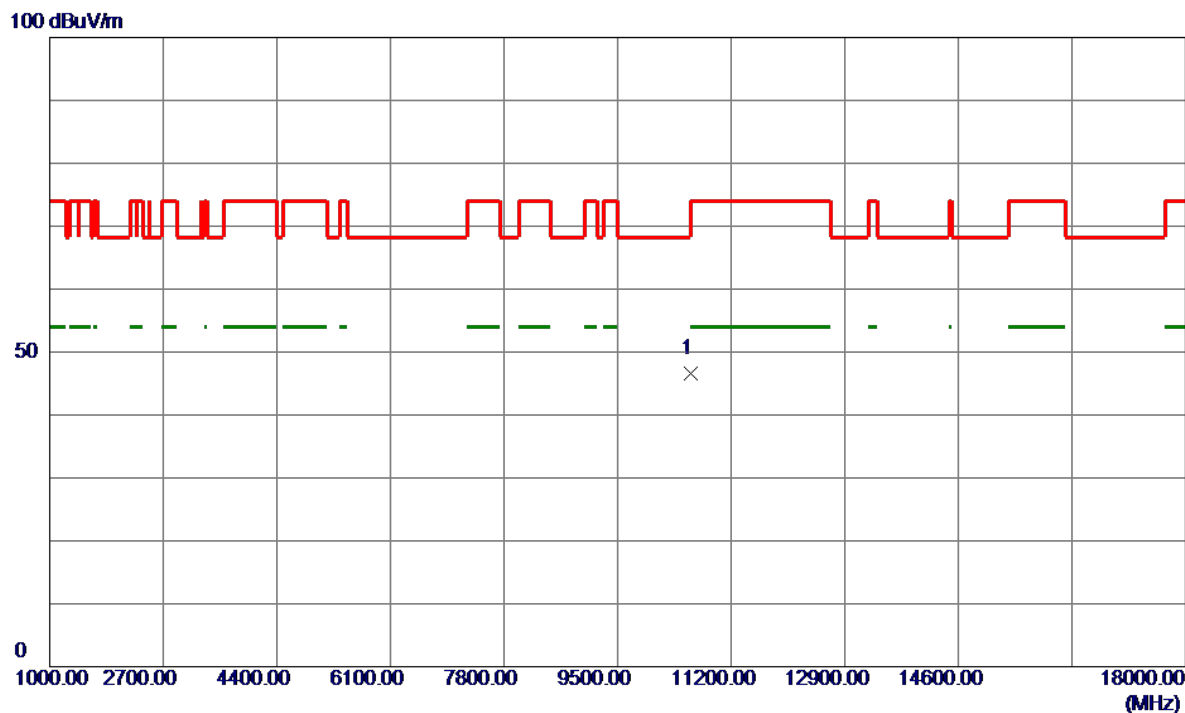


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10586.1500	37.42	9.19	46.61	68.20	-21.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

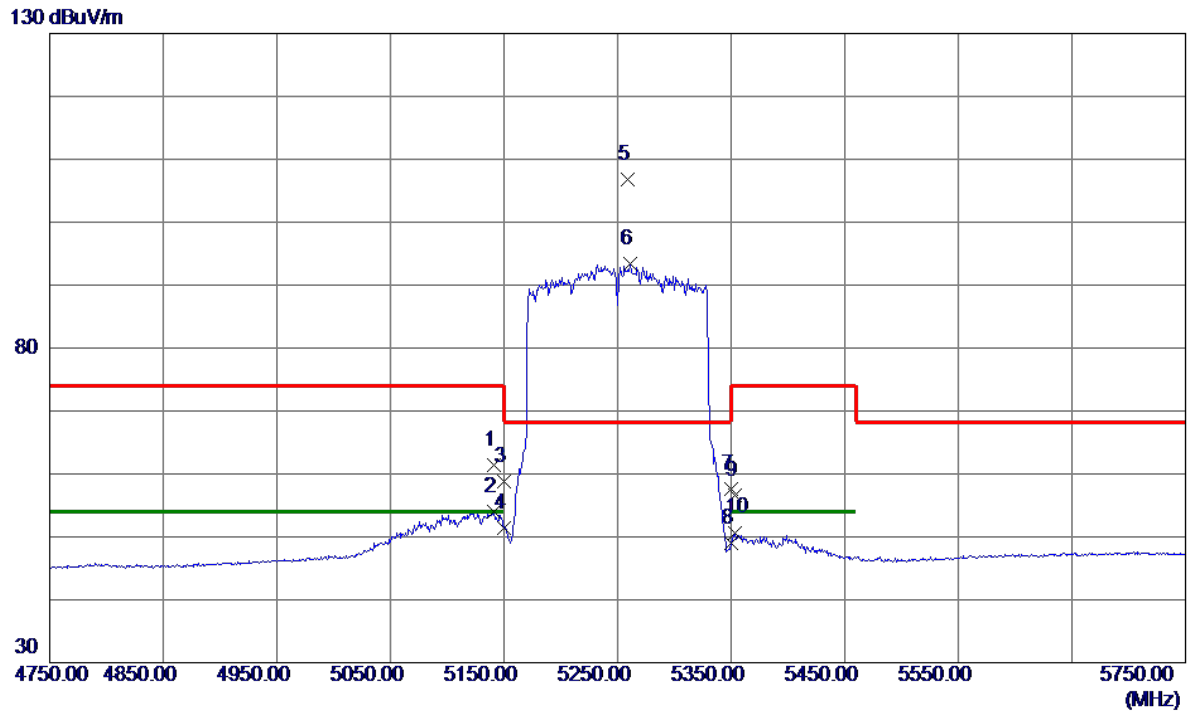


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.0000	46.09	15.29	61.38	74.00	-12.62	Peak	
2	5141.0000	38.65	15.29	53.94	54.00	-0.06	AVG	
3	5150.0000	43.58	15.31	58.89	74.00	-15.11	Peak	
4	5150.0000	36.11	15.31	51.42	54.00	-2.58	AVG	
5 *	5258.5000	91.31	15.54	106.85	68.20	38.65	Peak	No Limit
6	5261.0000	77.77	15.54	93.31	999.00	-905.69	AVG	No Limit
7	5350.0000	41.82	15.73	57.55	74.00	-16.45	Peak	
8	5350.0000	33.30	15.73	49.03	54.00	-4.97	AVG	
9	5353.5000	40.78	15.74	56.52	74.00	-17.48	Peak	
10	5353.5000	34.96	15.74	50.70	54.00	-3.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

100 dBuV/m

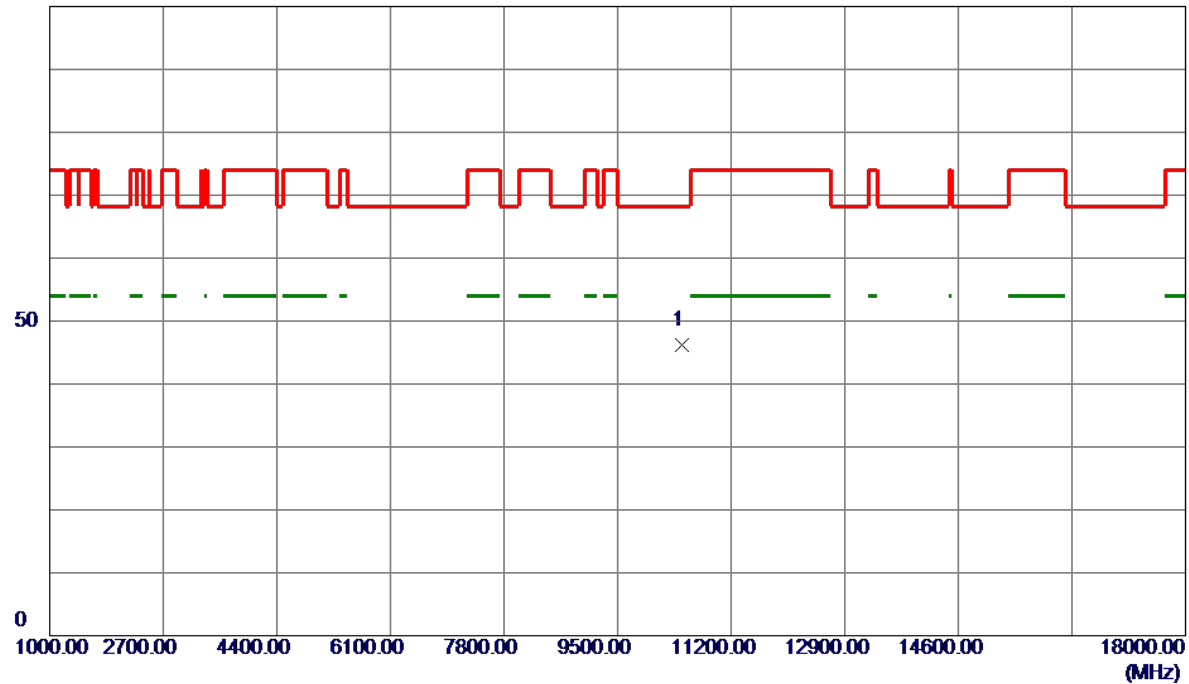


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10457.2000	36.96	9.15	46.11	68.20	-22.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

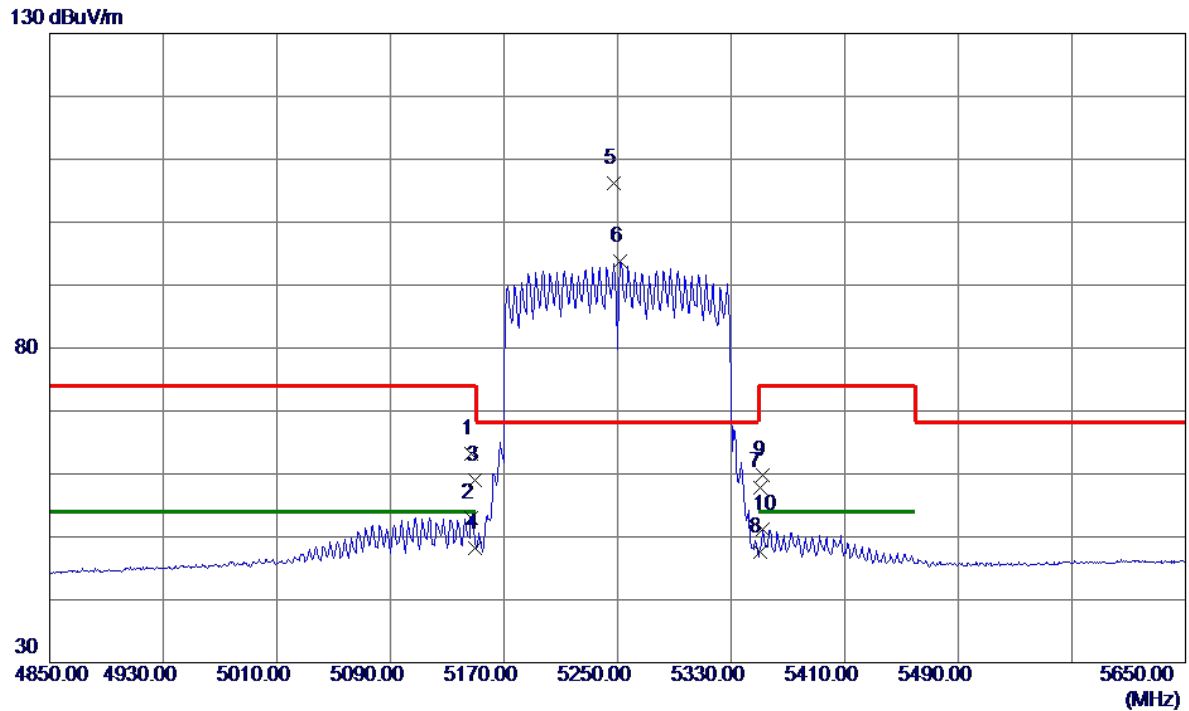


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	47.95	15.31	63.26	74.00	-10.74	Peak	
2	5147.2000	37.70	15.31	53.01	54.00	-0.99	AVG	
3	5150.0000	43.65	15.31	58.96	74.00	-15.04	Peak	
4	5150.0000	32.86	15.31	48.17	54.00	-5.83	AVG	
5 *	5247.2000	90.65	15.51	106.16	68.20	37.96	Peak	No Limit
6	5252.0000	78.26	15.52	93.78	999.00	-905.22	AVG	No Limit
7	5350.0000	42.17	15.73	57.90	74.00	-16.10	Peak	
8	5350.0000	31.87	15.73	47.60	54.00	-6.40	AVG	
9	5352.0000	44.05	15.73	59.78	74.00	-14.22	Peak	
10	5352.4000	35.44	15.73	51.17	54.00	-2.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

100 dBuV/m

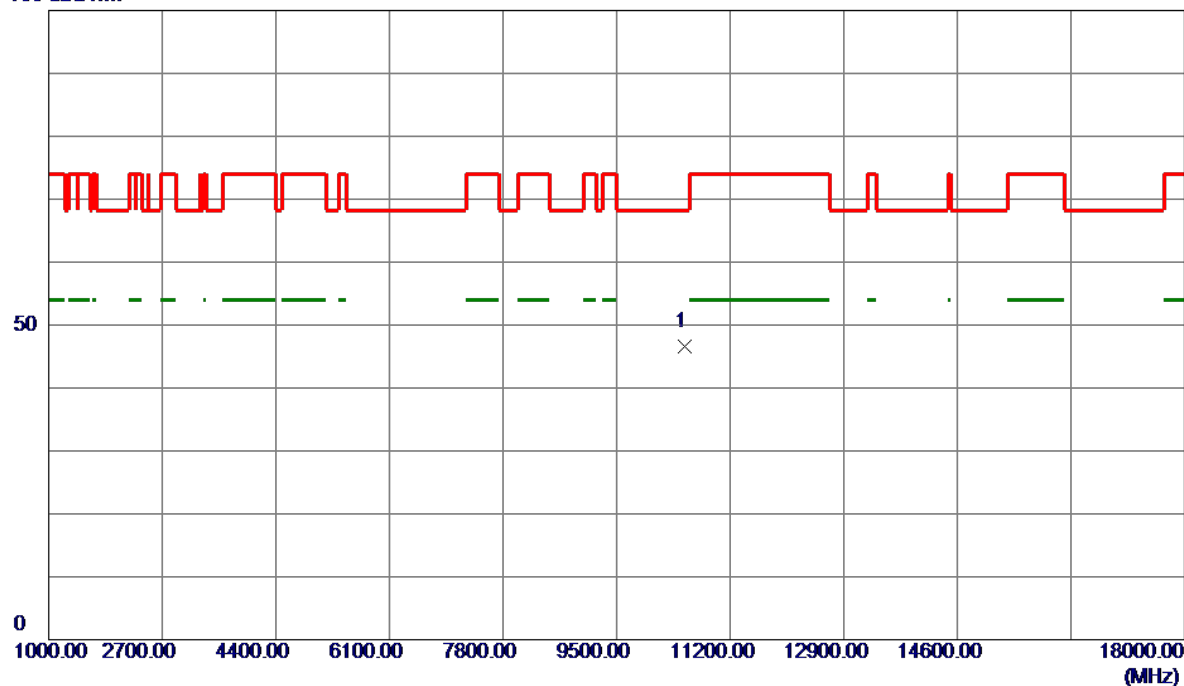


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10510.5750	37.47	9.20	46.67	68.20	-21.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

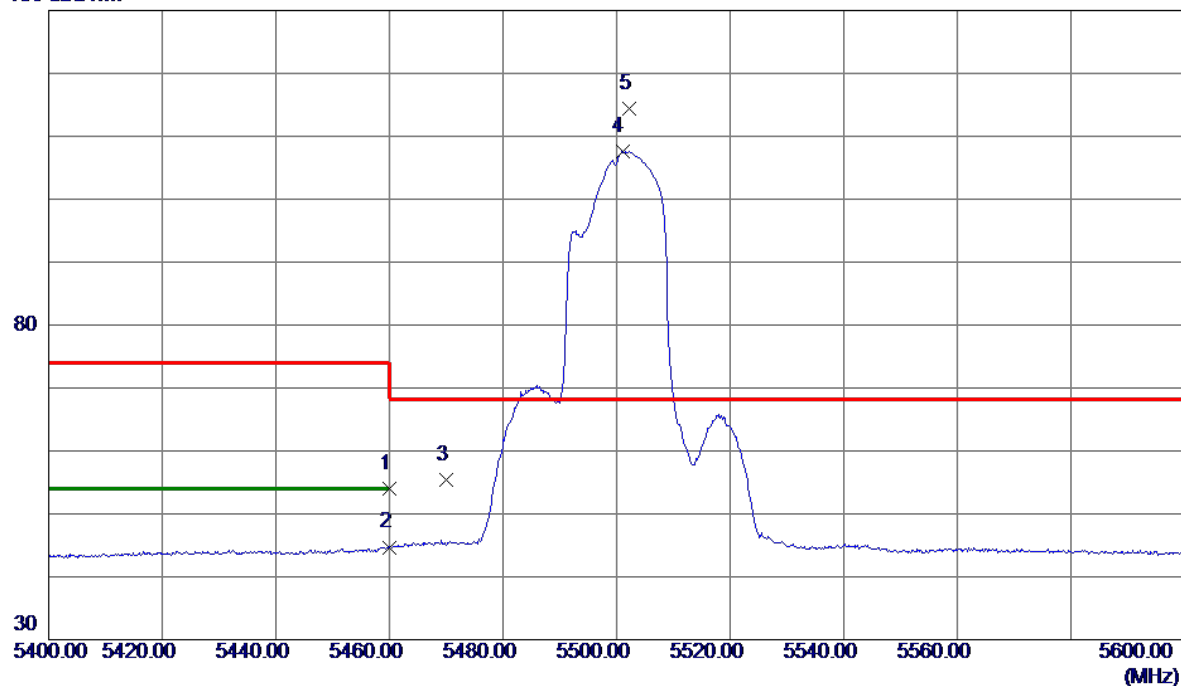


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.82	14.10	53.92	74.00	-20.08	Peak	
2	5460.0000	30.60	14.10	44.70	54.00	-9.30	AVG	
3	5470.0000	41.27	14.12	55.39	68.20	-12.81	Peak	
4	5501.0000	93.32	14.19	107.51	999.00	-891.49	AVG	No Limit
5 *	5502.3000	100.12	14.20	114.32	68.20	46.12	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

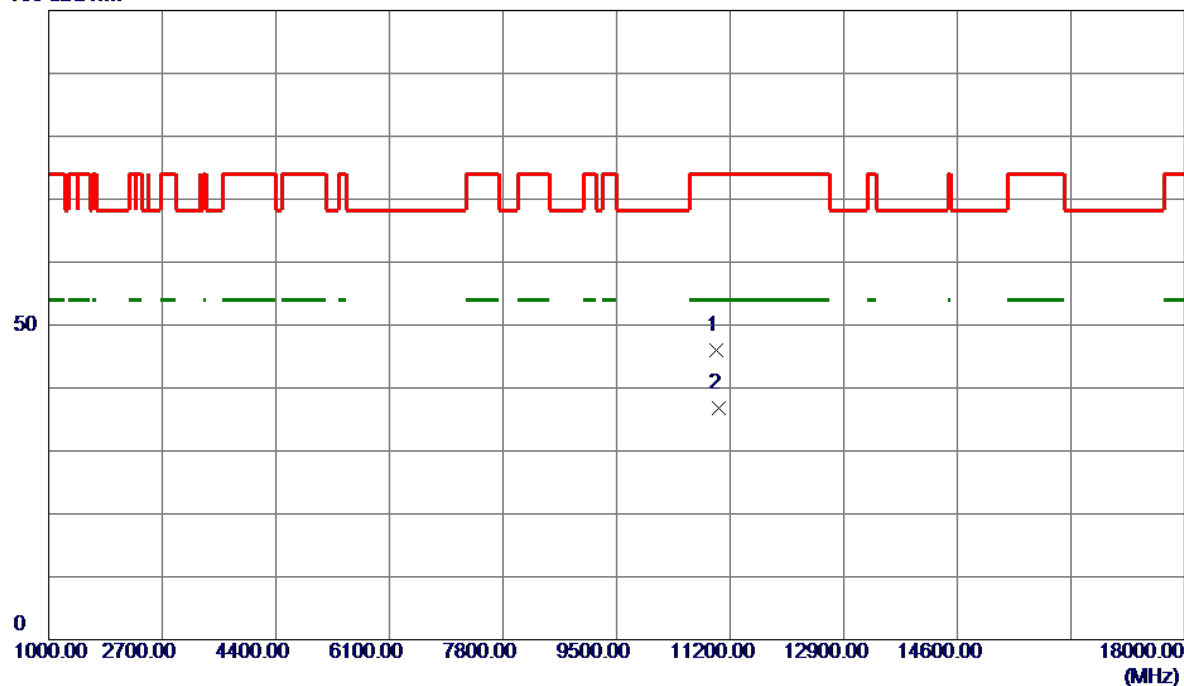


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.7500	36.84	9.13	45.97	74.00	-28.03	Peak	
2 *	11029.6500	27.64	9.16	36.80	54.00	-17.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

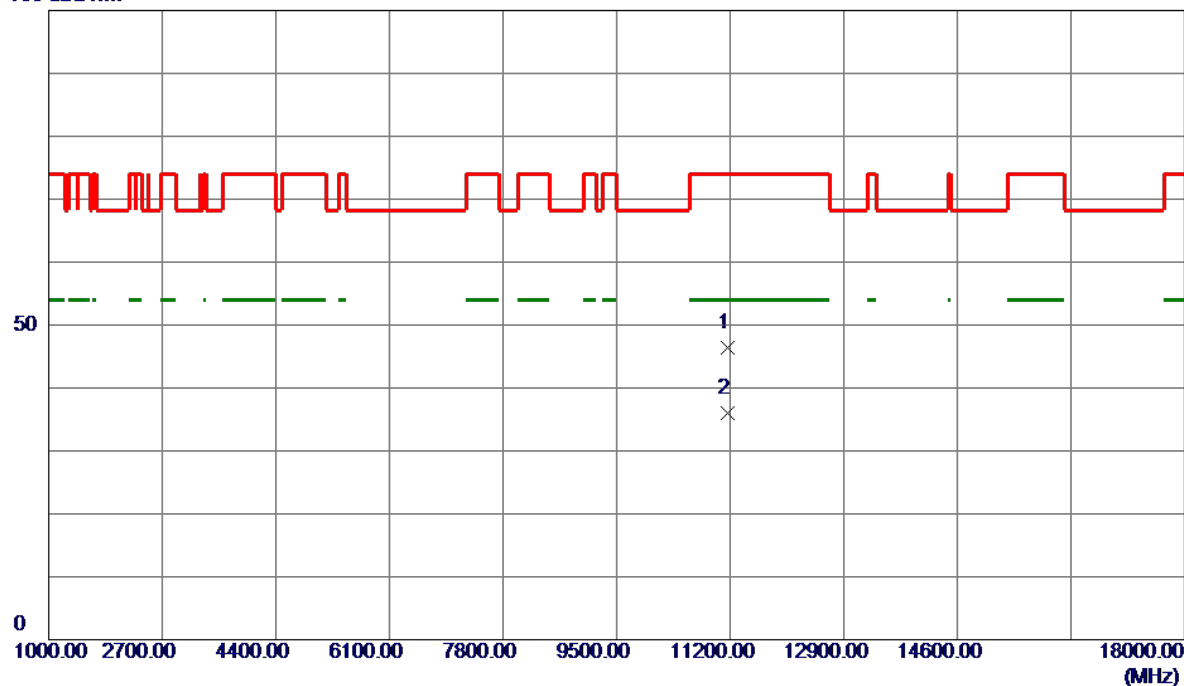


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.4000	37.19	9.29	46.48	74.00	-27.52	Peak	
2 *	11160.9000	26.70	9.29	35.99	54.00	-18.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

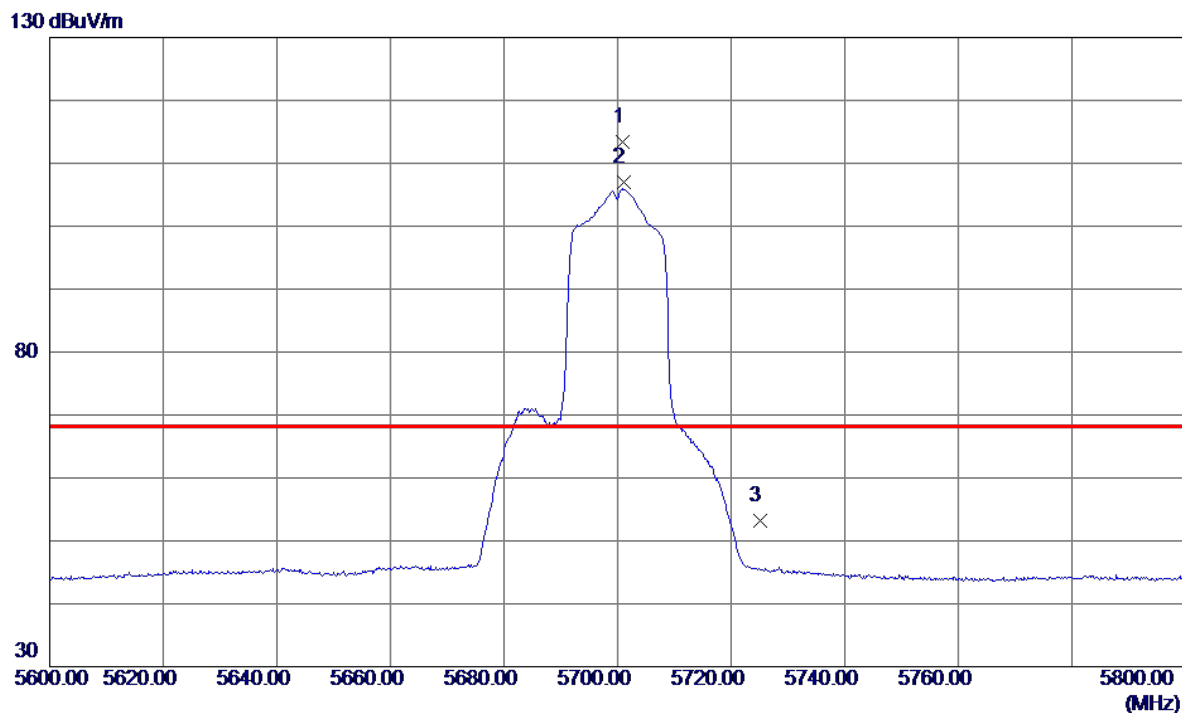


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.8000	98.62	14.85	113.47	68.20	45.27	Peak	No Limit
2	5701.0000	92.06	14.85	106.91	999.00	-892.09	AVG	No Limit
3	5725.0000	38.23	14.93	53.16	68.20	-15.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

100 dBuV/m

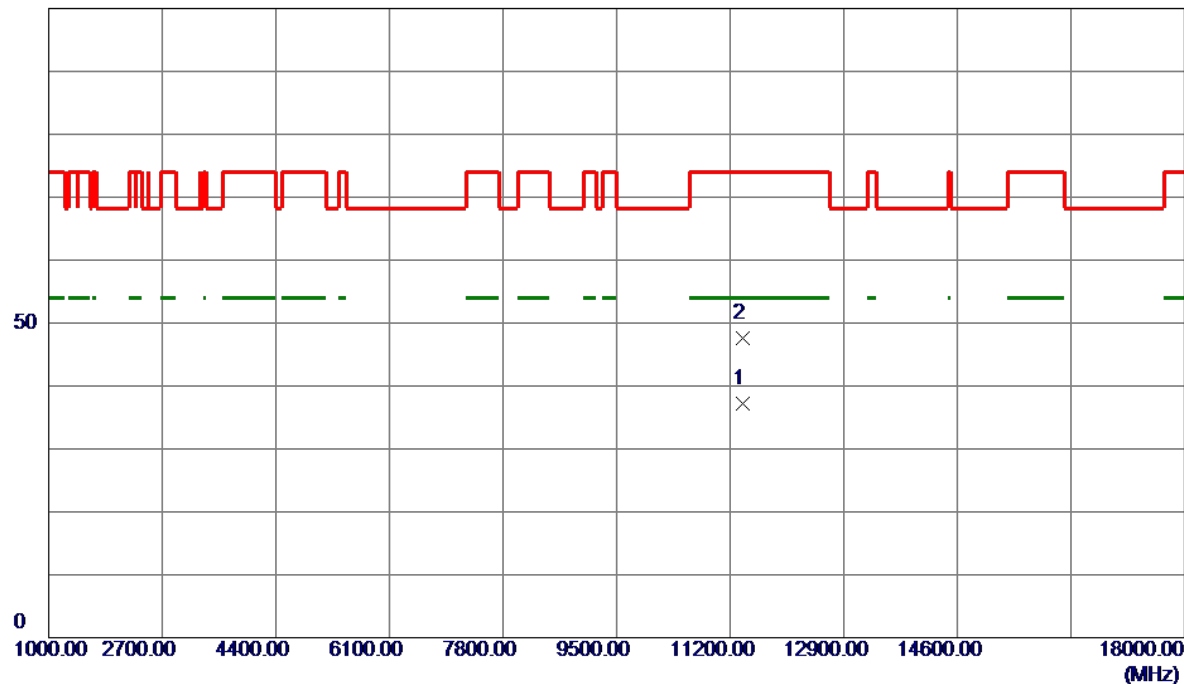


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11392.7500	27.63	9.53	37.16	54.00	-16.84	AVG	
2	11393.1500	37.98	9.53	47.51	74.00	-26.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

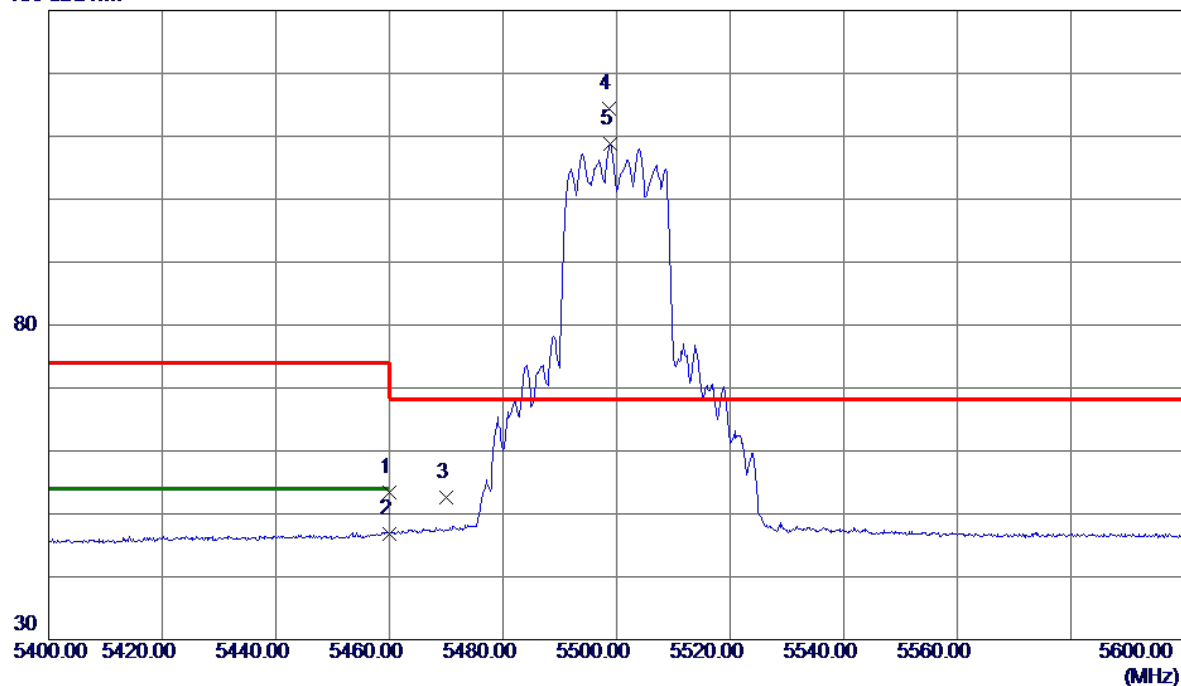


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.27	14.10	53.37	74.00	-20.63	Peak	
2	5460.0000	32.79	14.10	46.89	54.00	-7.11	AVG	
3	5470.0000	38.44	14.12	52.56	68.20	-15.64	Peak	
4 *	5498.7000	100.30	14.19	114.49	68.20	46.29	Peak	No Limit
5	5498.8000	94.56	14.19	108.75	999.00	-890.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

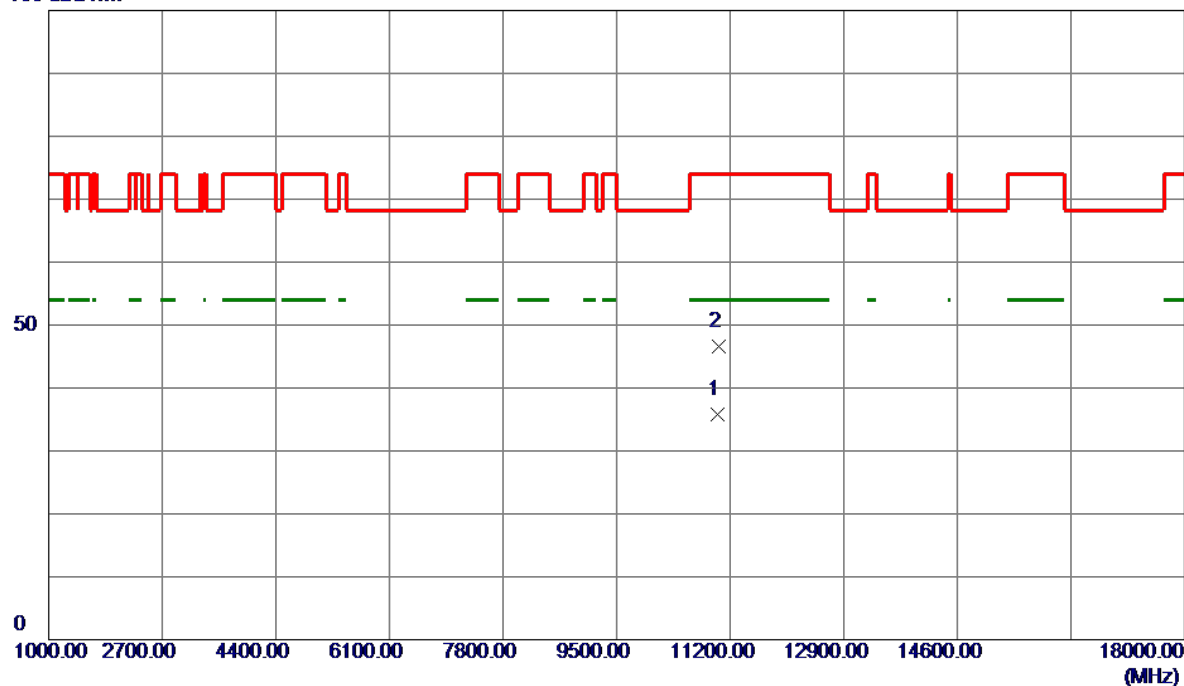


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11015.6500	26.70	9.15	35.85	54.00	-18.15	AVG	
2	11024.2000	37.54	9.15	46.69	74.00	-27.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

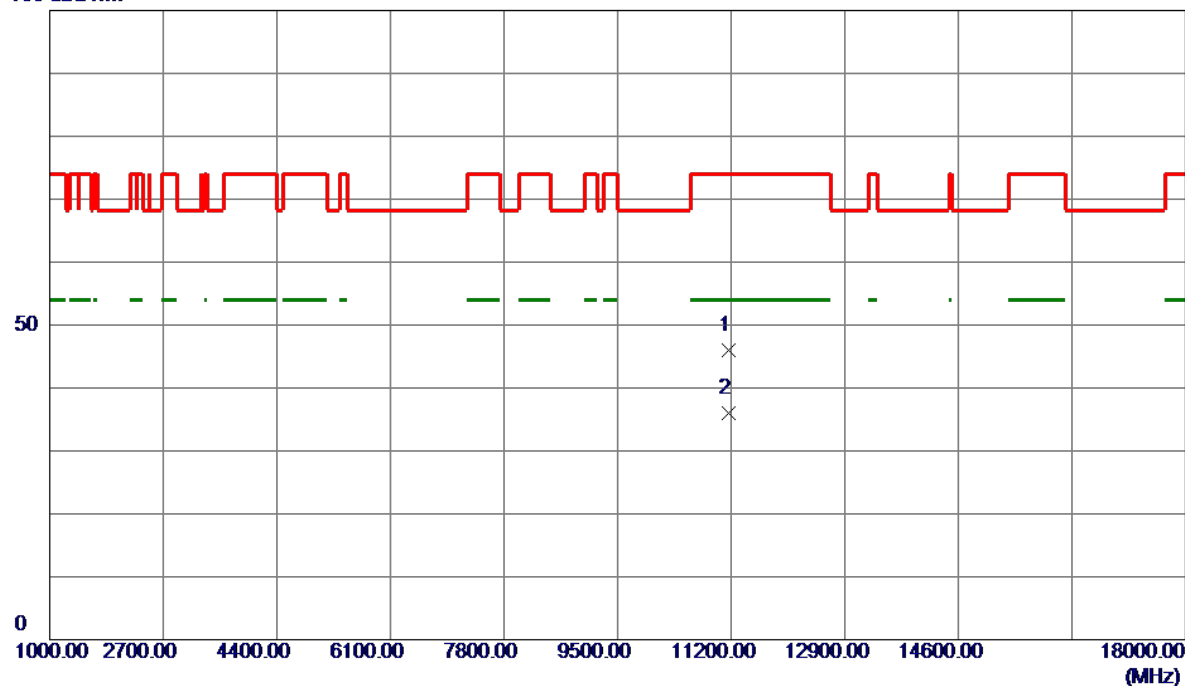


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11165.7500	36.76	9.30	46.06	74.00	-27.94	Peak	
2 *	11167.4750	26.75	9.30	36.05	54.00	-17.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

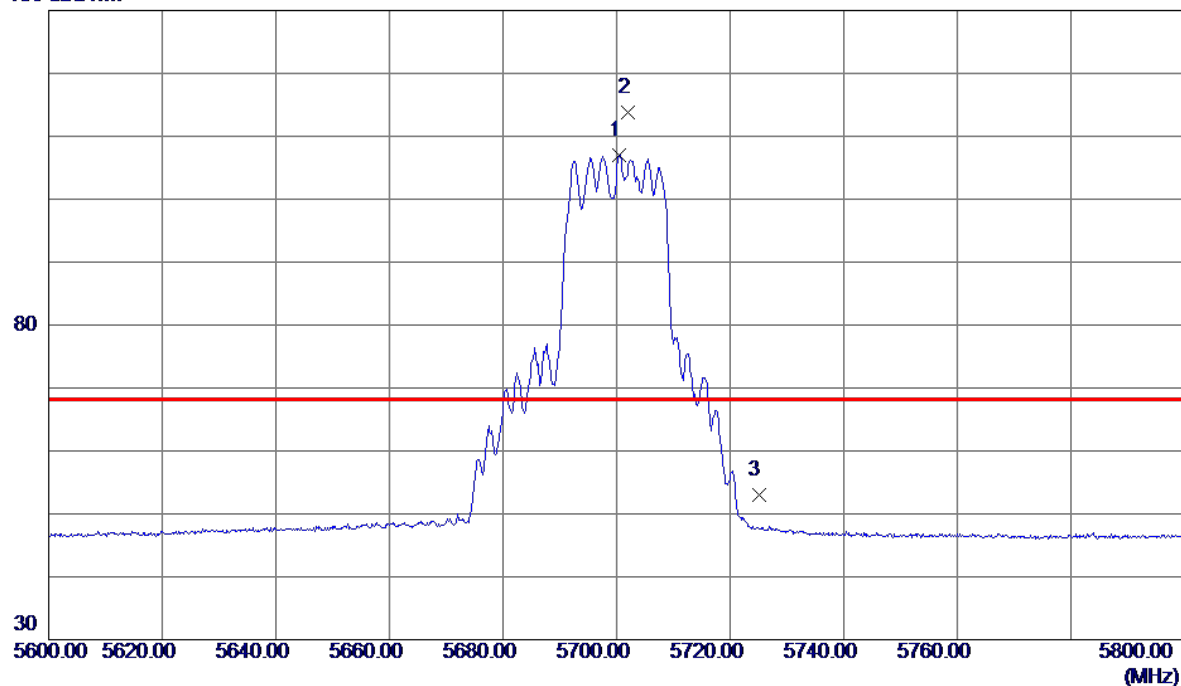


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.5000	92.20	14.85	107.05	999.00	-891.95	AVG	No Limit
2 *	5702.0000	98.93	14.85	113.78	68.20	45.58	Peak	No Limit
3	5725.0000	38.01	14.93	52.94	68.20	-15.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

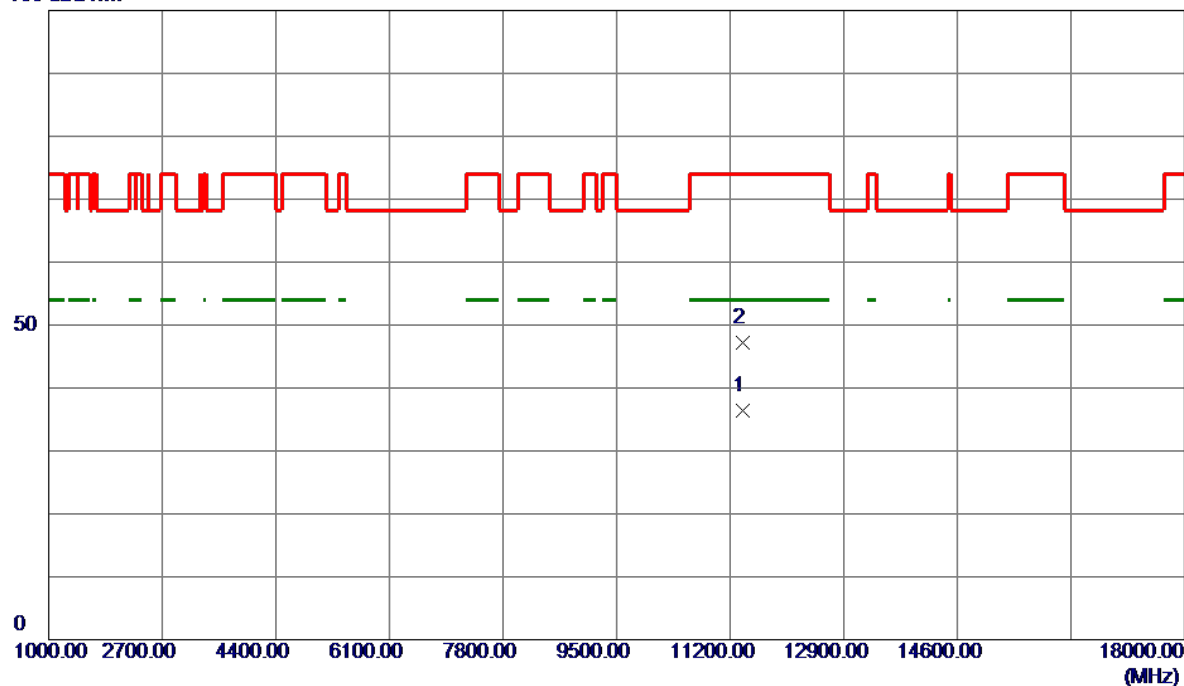


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11391.2800	26.80	9.53	36.33	54.00	-17.67	AVG	
2	11392.8700	37.71	9.53	47.24	74.00	-26.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

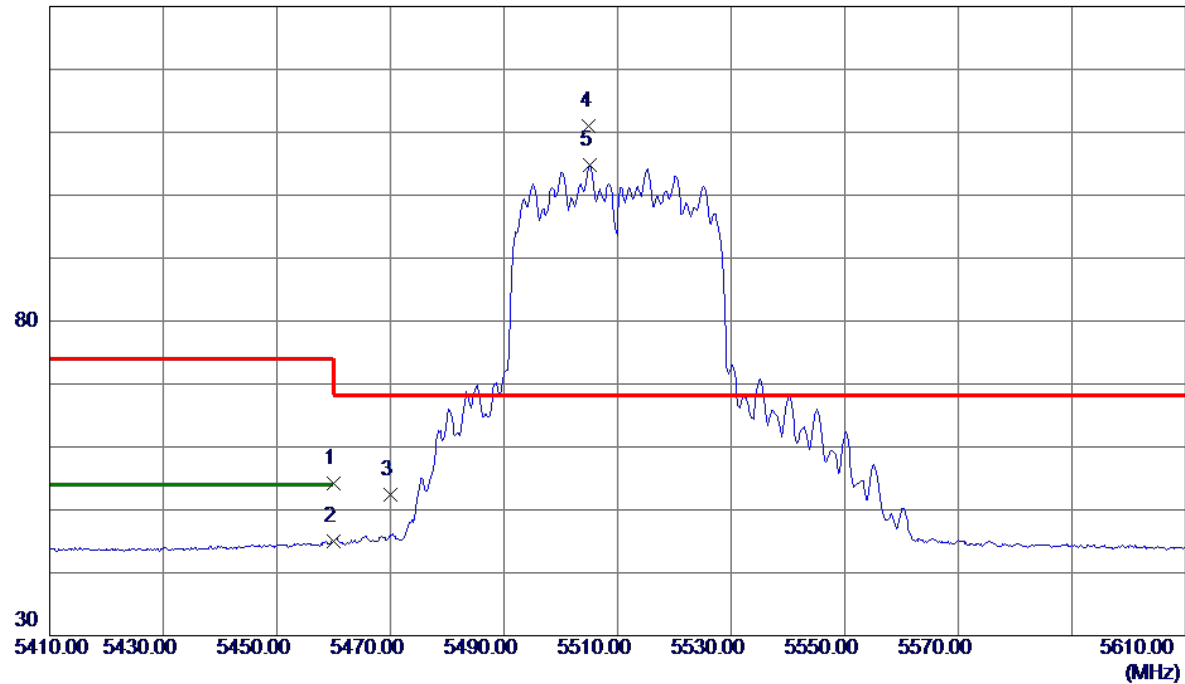


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.13	14.10	54.23	74.00	-19.77	Peak	
2	5460.0000	30.97	14.10	45.07	54.00	-8.93	AVG	
3	5470.0000	38.29	14.12	52.41	68.20	-15.79	Peak	
4 *	5505.0000	96.86	14.21	111.07	68.20	42.87	Peak	No Limit
5	5505.1000	90.57	14.21	104.78	999.00	-894.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

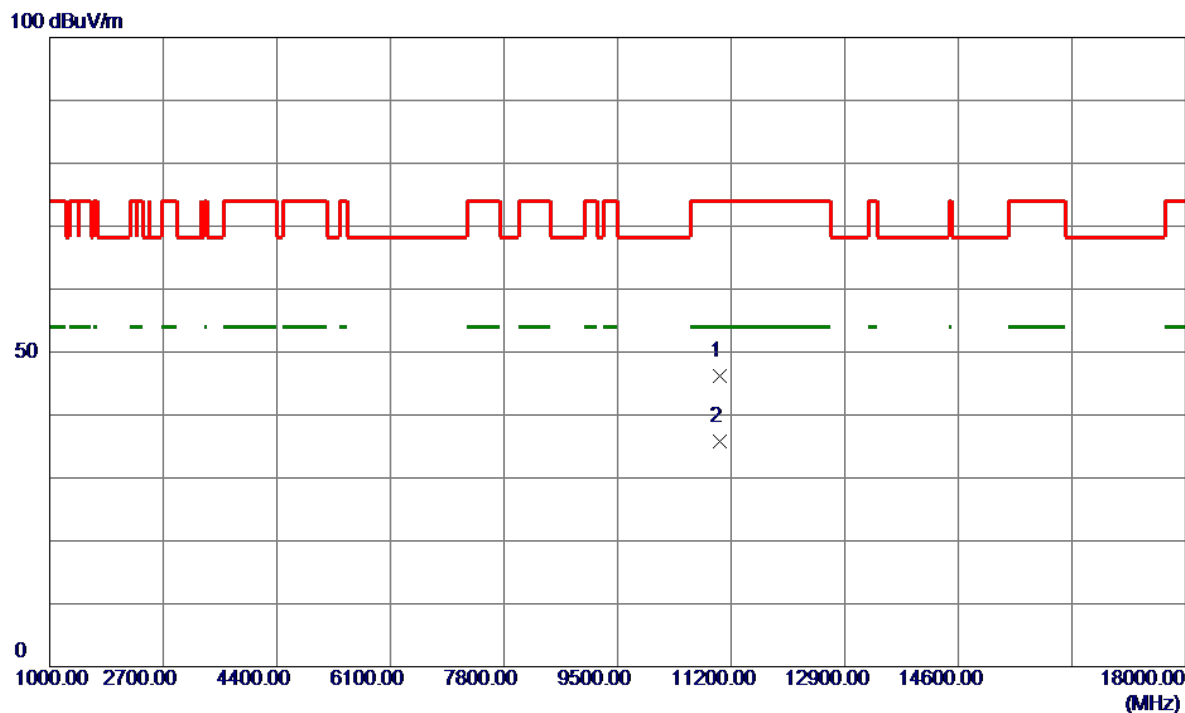


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11026.3099	37.11	9.16	46.27	74.00	-27.73	Peak	
2 *	11027.6900	26.66	9.16	35.82	54.00	-18.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

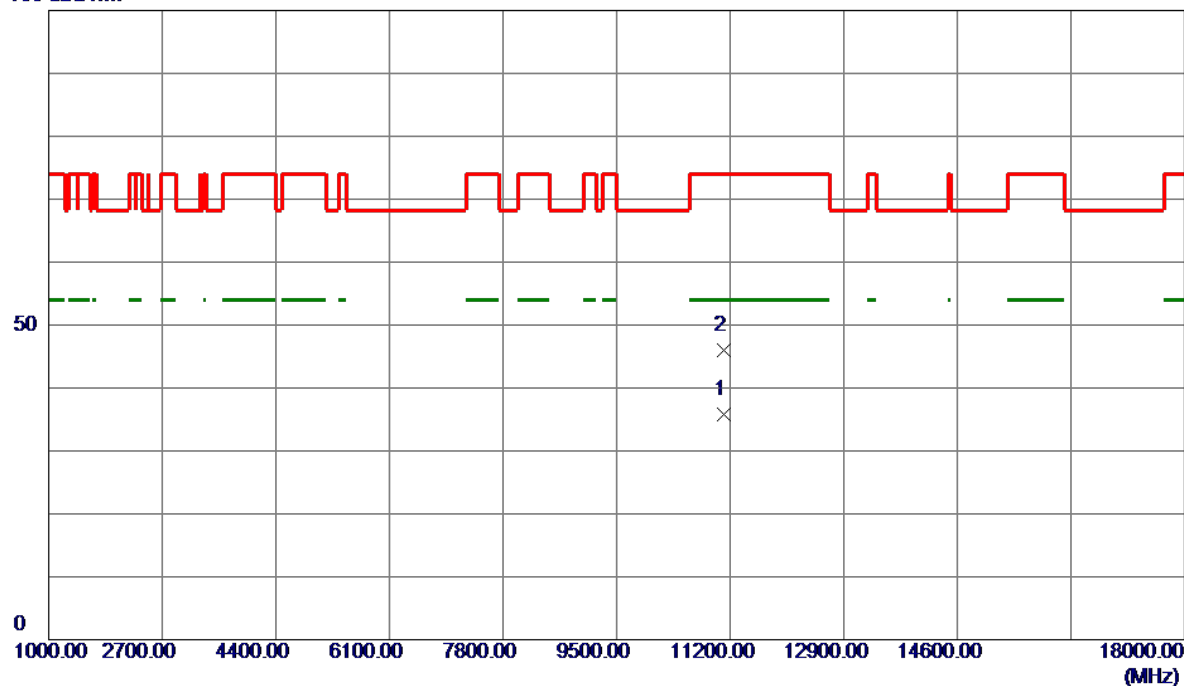


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11098.6100	26.48	9.23	35.71	54.00	-18.29	AVG	
2	11108.5800	36.82	9.24	46.06	74.00	-27.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

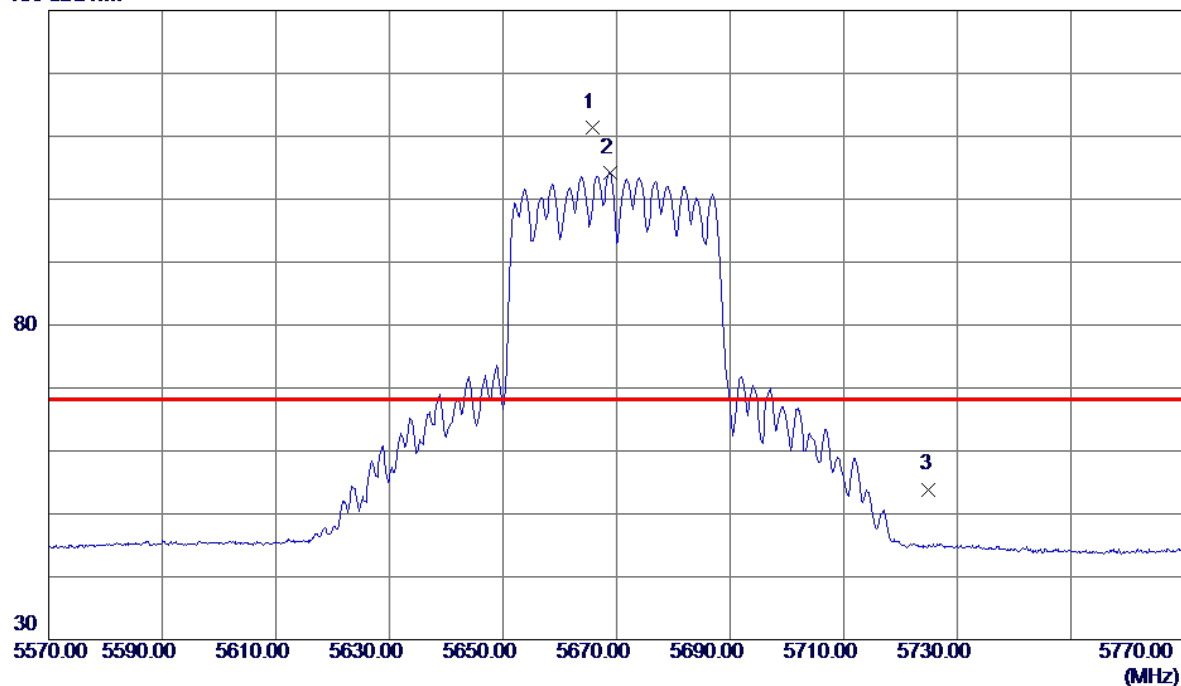


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5665.7000	96.76	14.73	111.49	68.20	43.29	Peak	No Limit
2	5668.8000	89.40	14.74	104.14	999.00	-894.86	AVG	No Limit
3	5725.0000	38.97	14.93	53.90	68.20	-14.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

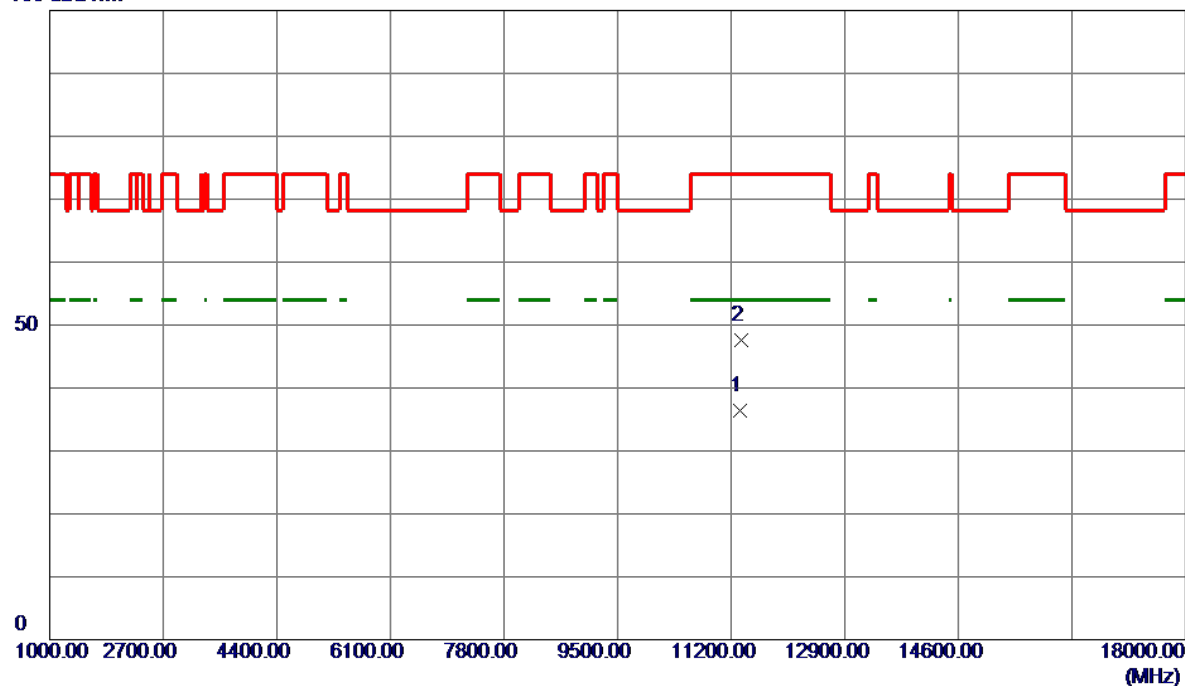


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11339.5400	26.85	9.48	36.33	54.00	-17.67	AVG	
2	11346.4700	38.19	9.48	47.67	74.00	-26.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

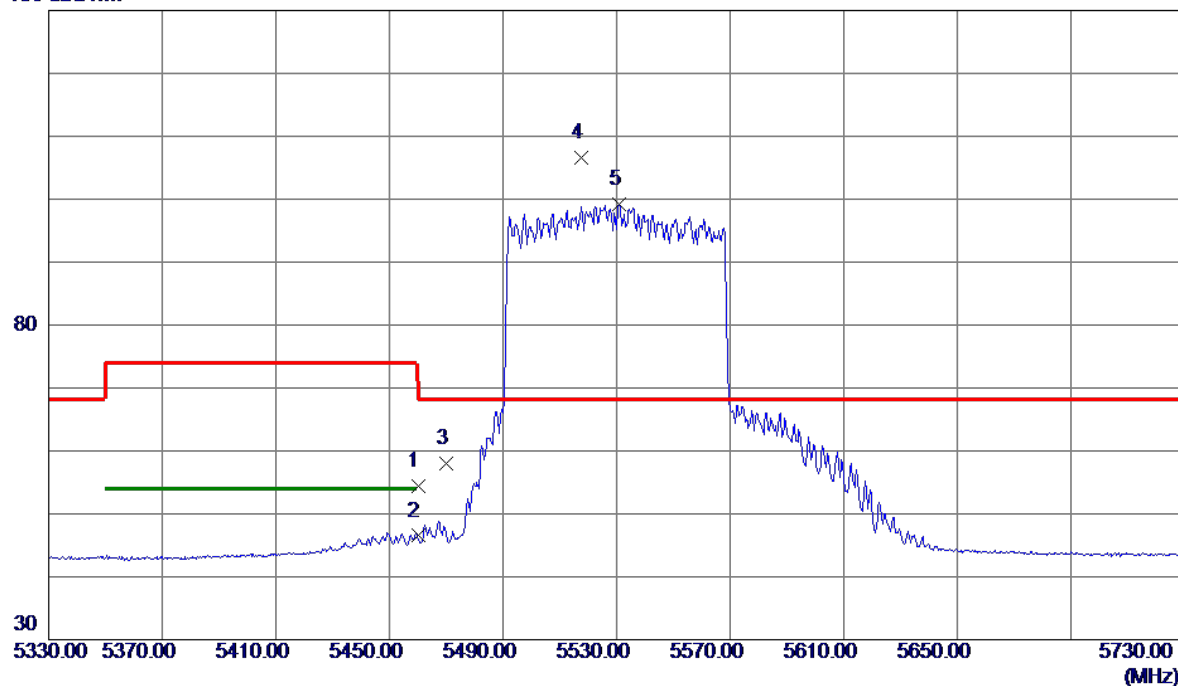


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.25	14.10	54.35	74.00	-19.65	Peak	
2	5460.0000	32.40	14.10	46.50	54.00	-7.50	AVG	
3	5470.0000	43.86	14.12	57.98	68.20	-10.22	Peak	
4 *	5517.6000	92.37	14.25	106.62	68.20	38.42	Peak	No Limit
5	5530.8000	85.00	14.29	99.29	999.00	-899.71	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

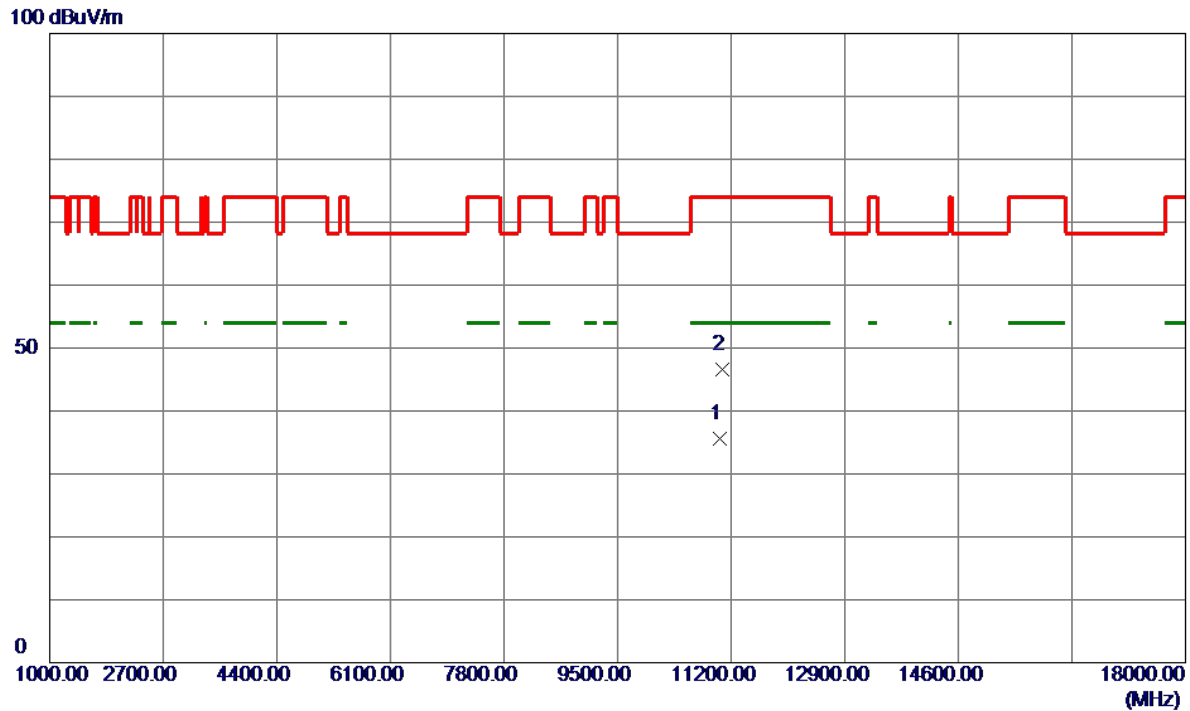


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11024.3500	26.51	9.15	35.66	54.00	-18.34	AVG	
2	11063.6500	37.44	9.19	46.63	74.00	-27.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

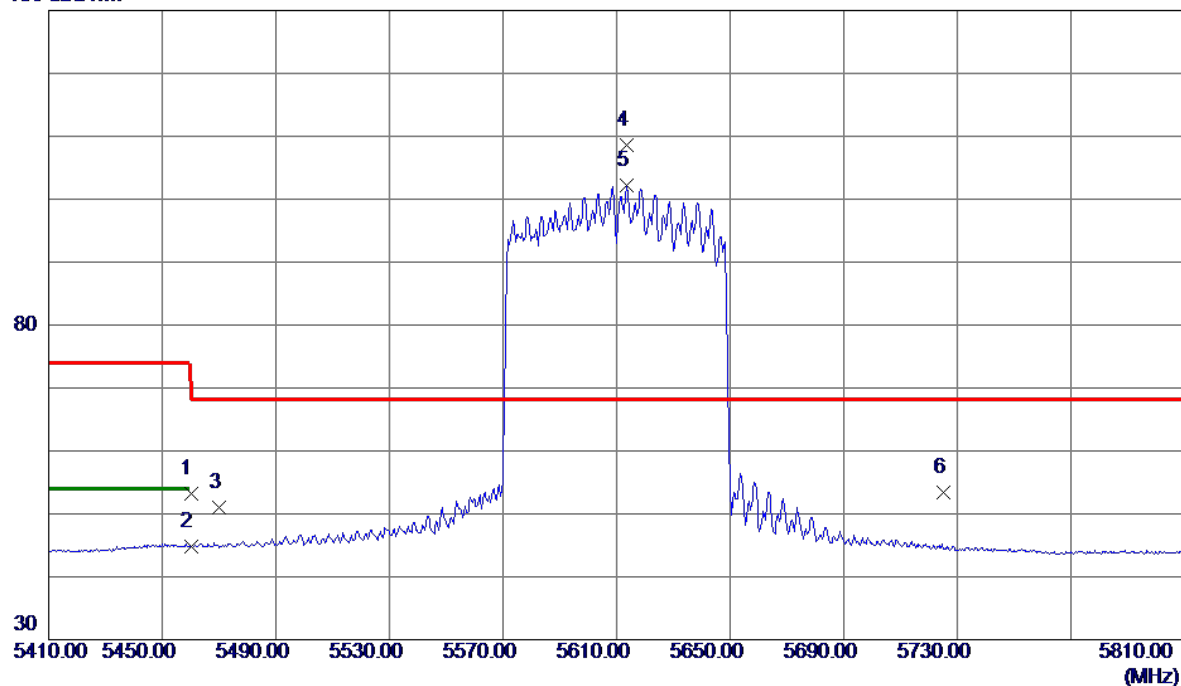


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.14	14.10	53.24	74.00	-20.76	Peak	
2	5460.0000	30.76	14.10	44.86	54.00	-9.14	AVG	
3	5470.0000	36.94	14.12	51.06	68.20	-17.14	Peak	
4 *	5613.4000	94.08	14.56	108.64	68.20	40.44	Peak	No Limit
5	5613.6000	87.58	14.56	102.14	999.00	-896.86	AVG	No Limit
6	5725.0000	38.55	14.93	53.48	68.20	-14.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

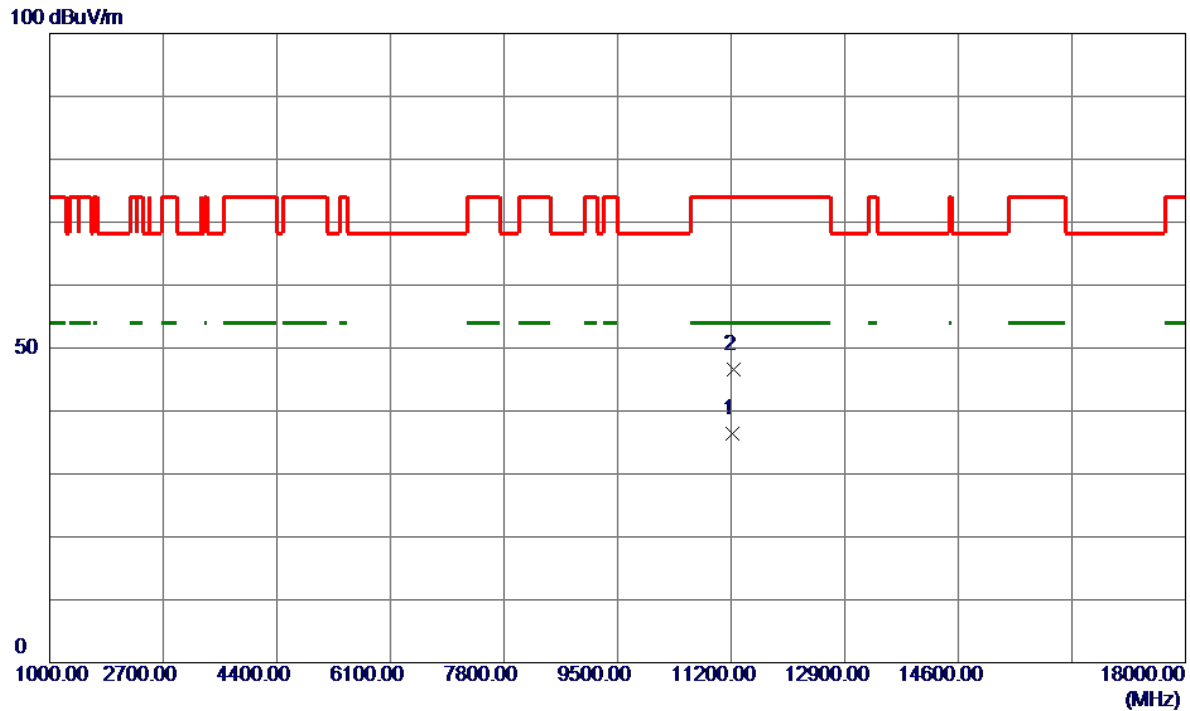


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11216.4000	27.04	9.35	36.39	54.00	-17.61	AVG	
2	11236.0000	37.21	9.37	46.58	74.00	-27.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

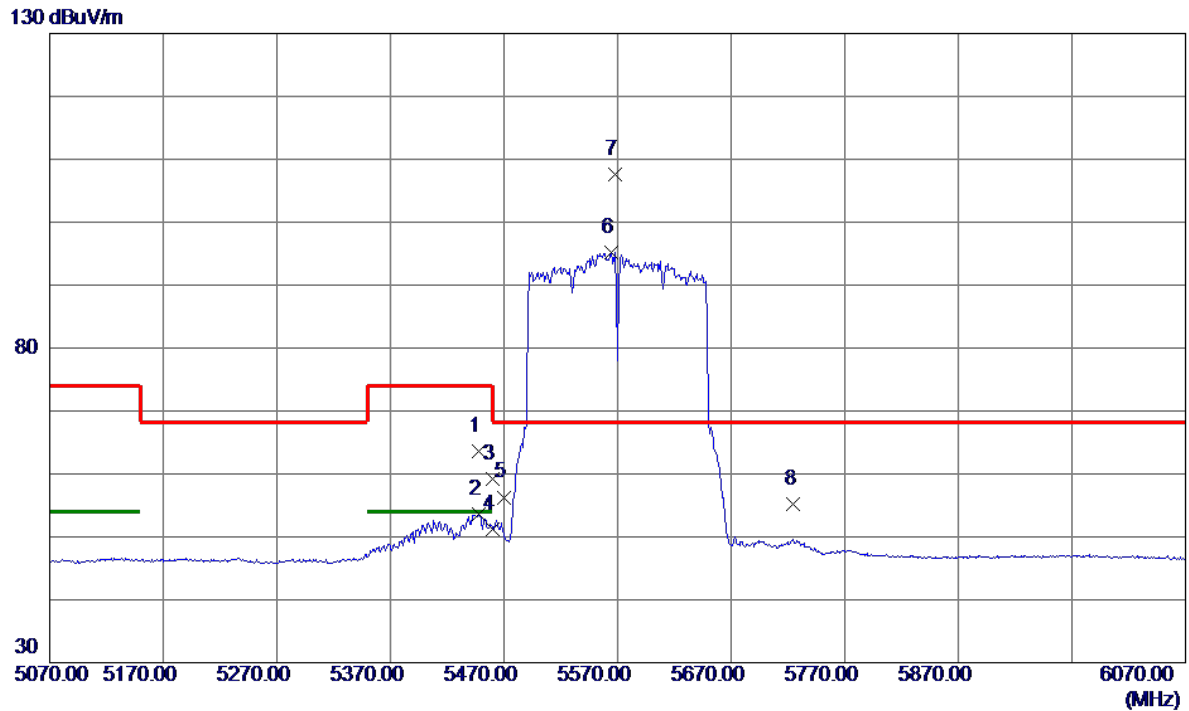


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5448.0000	47.62	15.93	63.55	74.00	-10.45	Peak	
2	5448.0000	37.75	15.93	53.68	54.00	-0.32	AVG	
3	5460.0000	43.30	15.96	59.26	74.00	-14.74	Peak	
4	5460.0000	35.18	15.96	51.14	54.00	-2.86	AVG	
5	5470.0000	40.32	15.98	56.30	68.20	-11.90	Peak	
6	5564.5000	78.98	16.25	95.23	999.00	-903.77	AVG	No Limit
7 *	5568.0000	91.29	16.26	107.55	68.20	39.35	Peak	No Limit
8	5725.0000	38.38	16.76	55.14	68.20	-13.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

100 dBuV/m

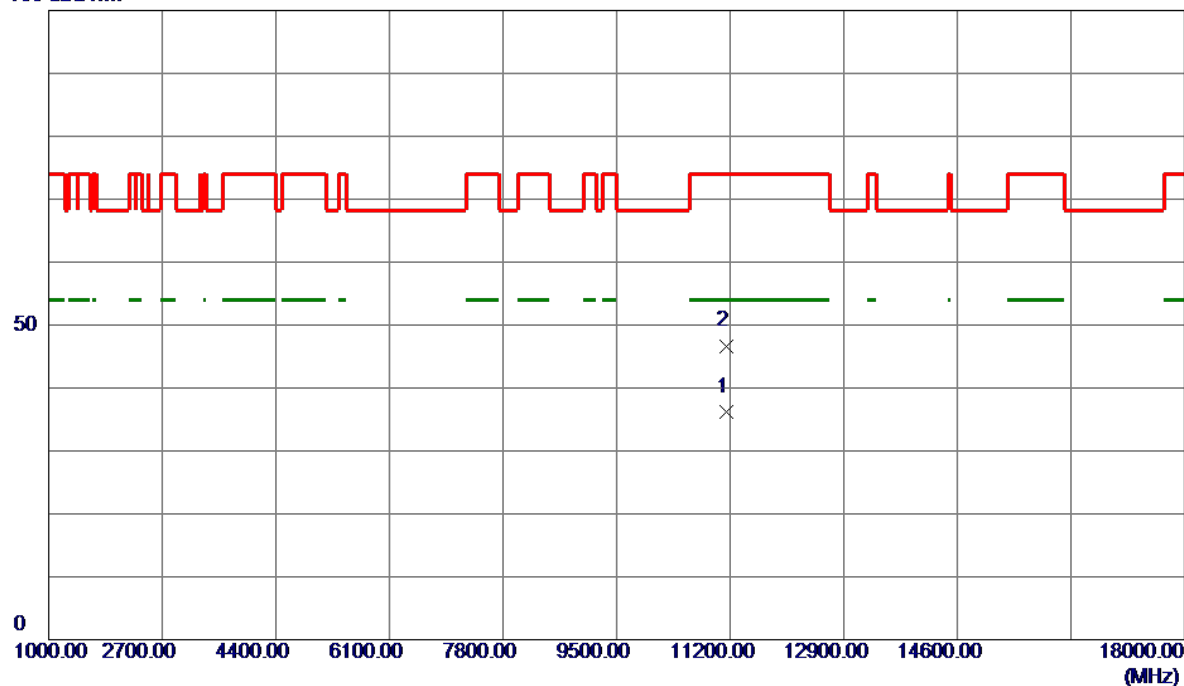


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11140.2000	26.98	9.27	36.25	54.00	-17.75	AVG	
2	11146.9000	37.42	9.28	46.70	74.00	-27.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

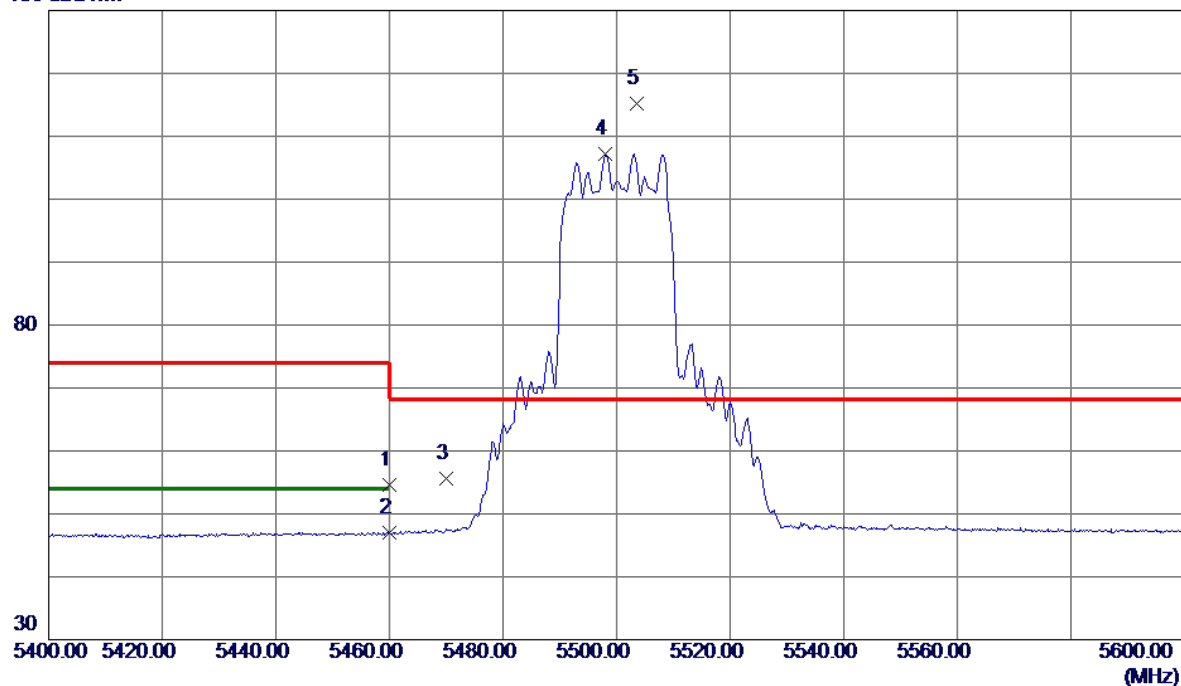


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.51	14.10	54.61	74.00	-19.39	Peak	
2	5460.0000	32.90	14.10	47.00	54.00	-7.00	AVG	
3	5470.0000	41.53	14.12	55.65	68.20	-12.55	Peak	
4	5498.1000	93.10	14.19	107.29	999.00	-891.71	AVG	No Limit
5 *	5503.6000	100.98	14.20	115.18	68.20	46.98	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

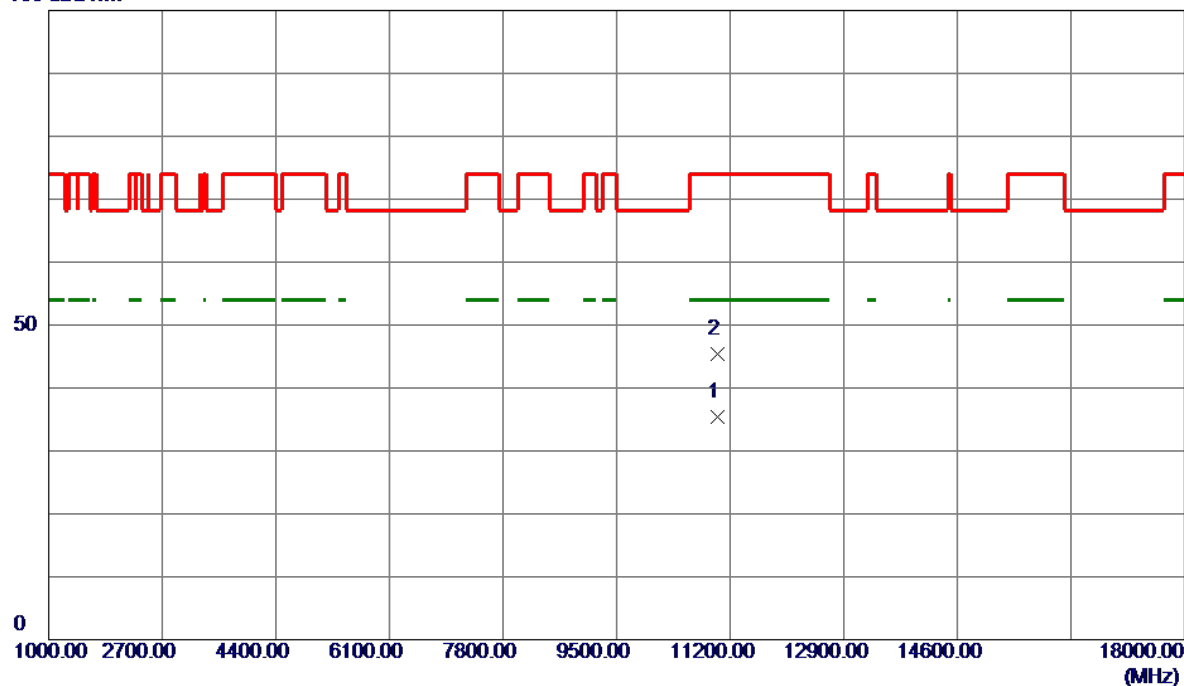


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11001.7200	26.28	9.13	35.41	54.00	-18.59	AVG	
2	11004.0599	36.31	9.13	45.44	74.00	-28.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

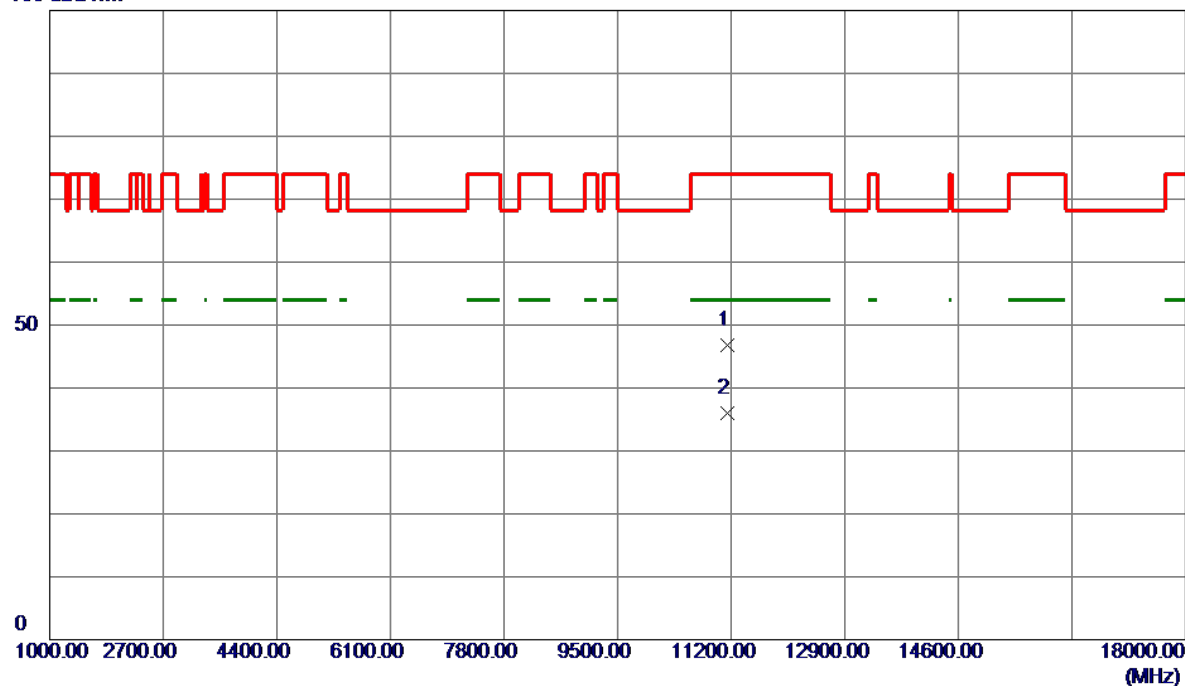


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11151.8300	37.50	9.28	46.78	74.00	-27.22	Peak	
2 *	11151.9200	26.66	9.28	35.94	54.00	-18.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

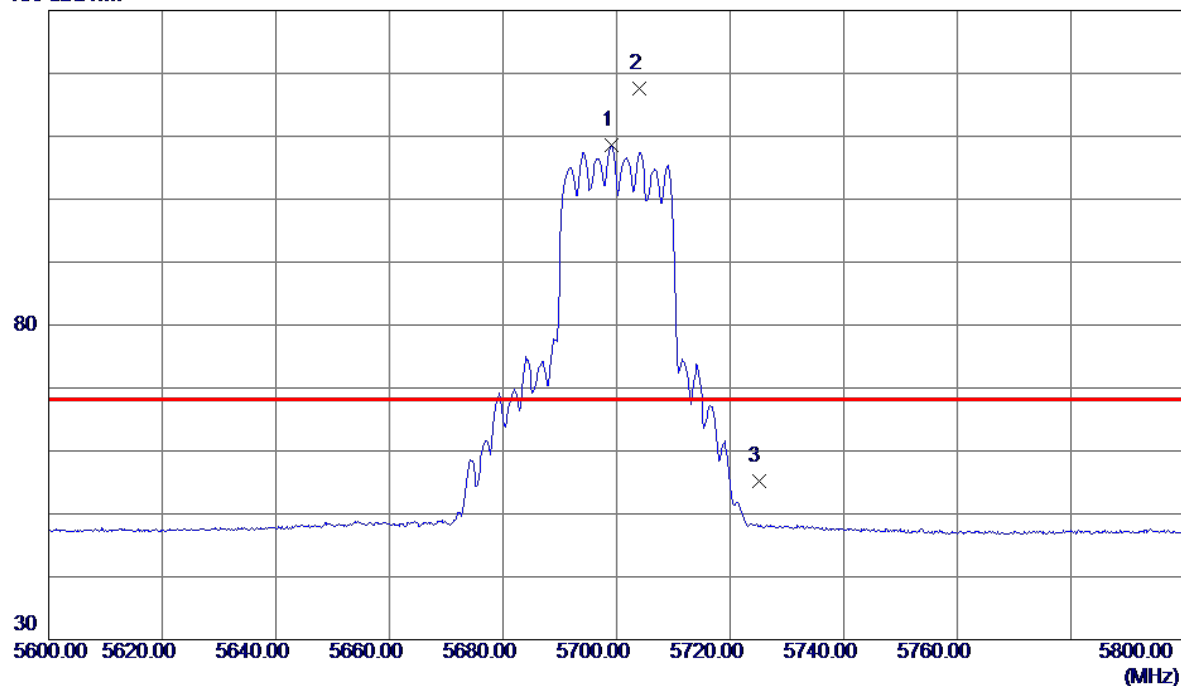


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5699.2000	93.75	14.84	108.59	999.00	-890.41	AVG	No Limit
2 *	5704.1000	102.81	14.86	117.67	68.20	49.47	Peak	No Limit
3	5725.0000	40.34	14.93	55.27	68.20	-12.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

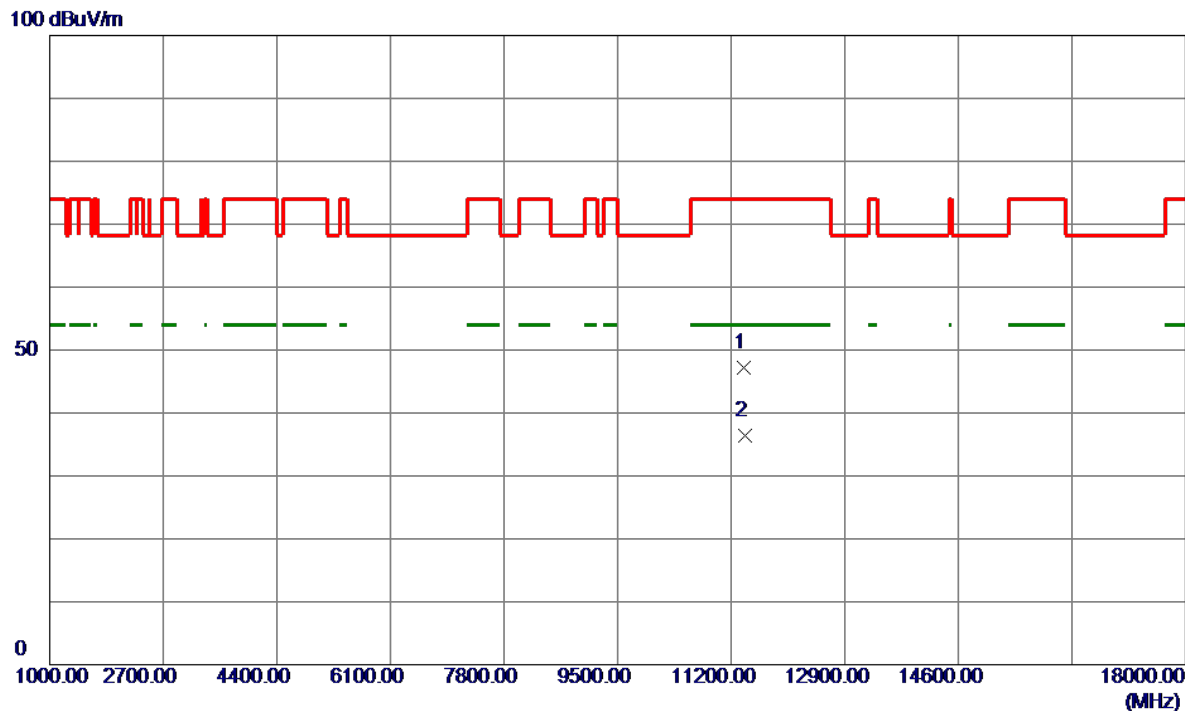


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11397.8099	37.71	9.54	47.25	74.00	-26.75	Peak	
2 *	11406.9200	26.85	9.55	36.40	54.00	-17.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

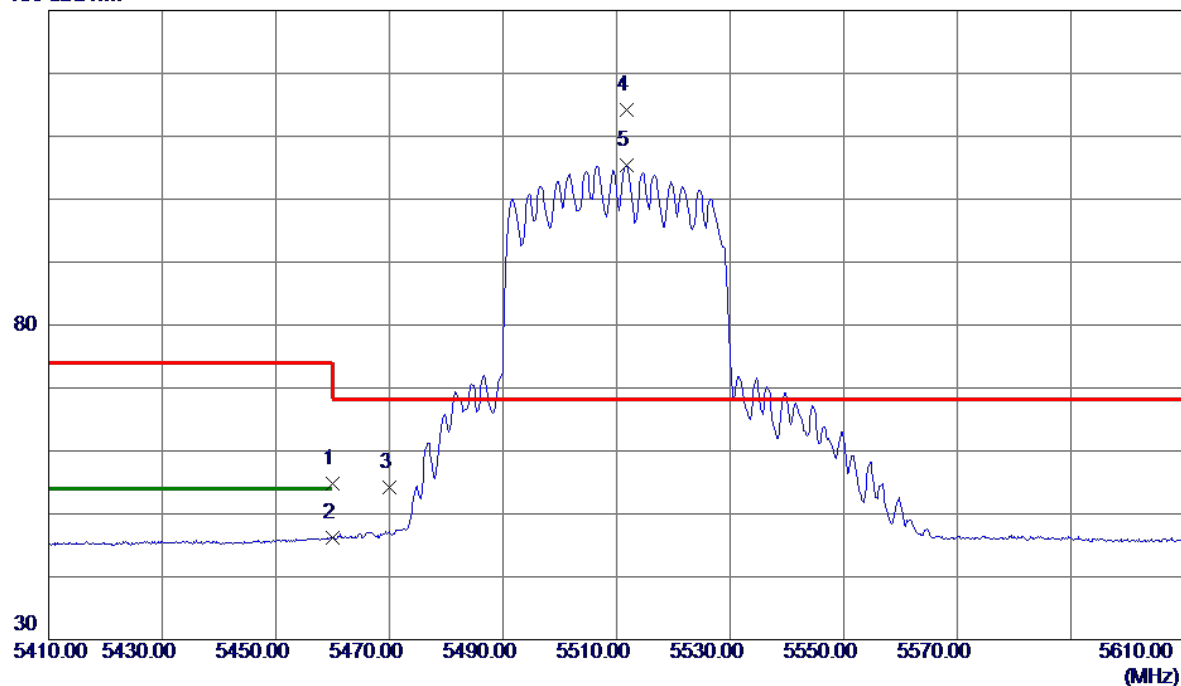


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.69	14.10	54.79	74.00	-19.21	Peak	
2	5460.0000	32.15	14.10	46.25	54.00	-7.75	AVG	
3	5470.0000	40.09	14.12	54.21	68.20	-13.99	Peak	
4 *	5511.7000	100.06	14.23	114.29	68.20	46.09	Peak	No Limit
5	5511.7000	91.17	14.23	105.40	999.00	-893.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

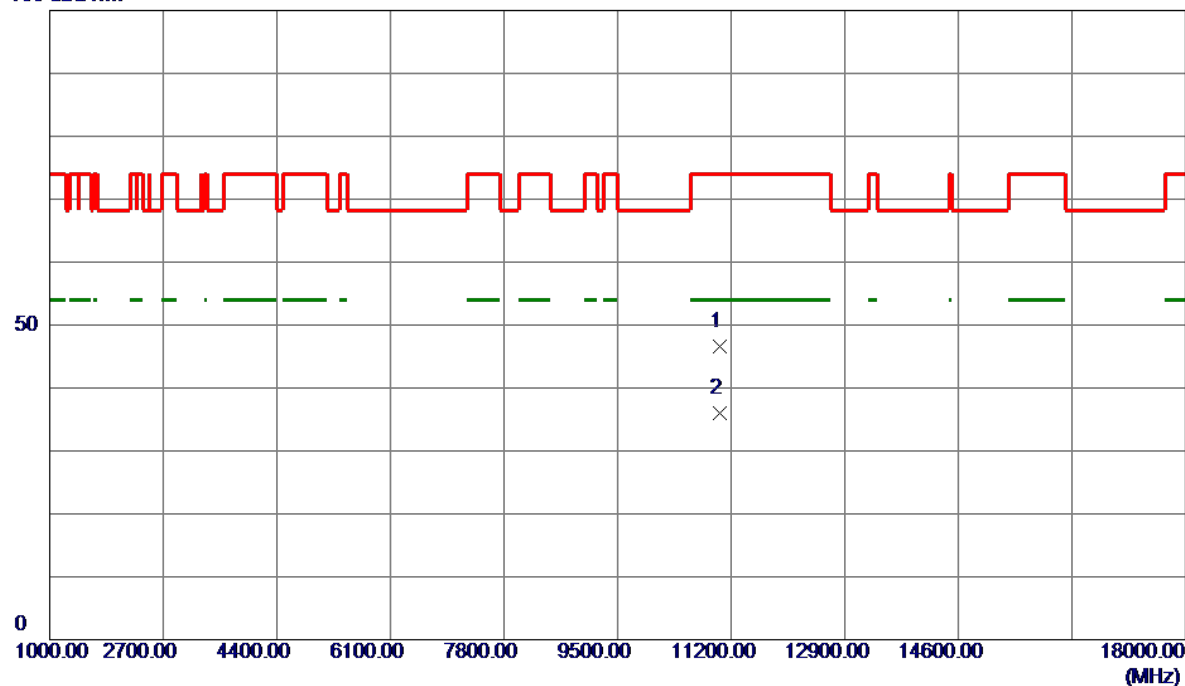


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11028.7250	37.42	9.16	46.58	74.00	-27.42	Peak	
2 *	11038.6500	26.74	9.17	35.91	54.00	-18.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

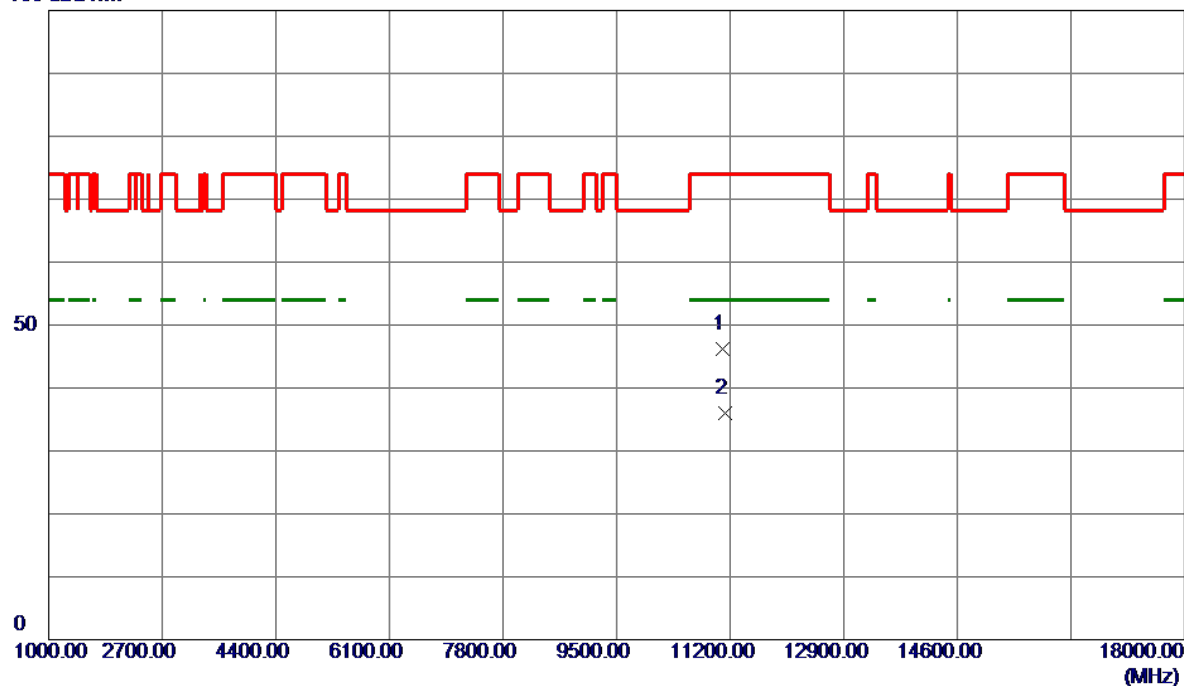


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11093.9500	37.00	9.23	46.23	74.00	-27.77	Peak	
2 *	11124.2500	26.83	9.26	36.09	54.00	-17.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

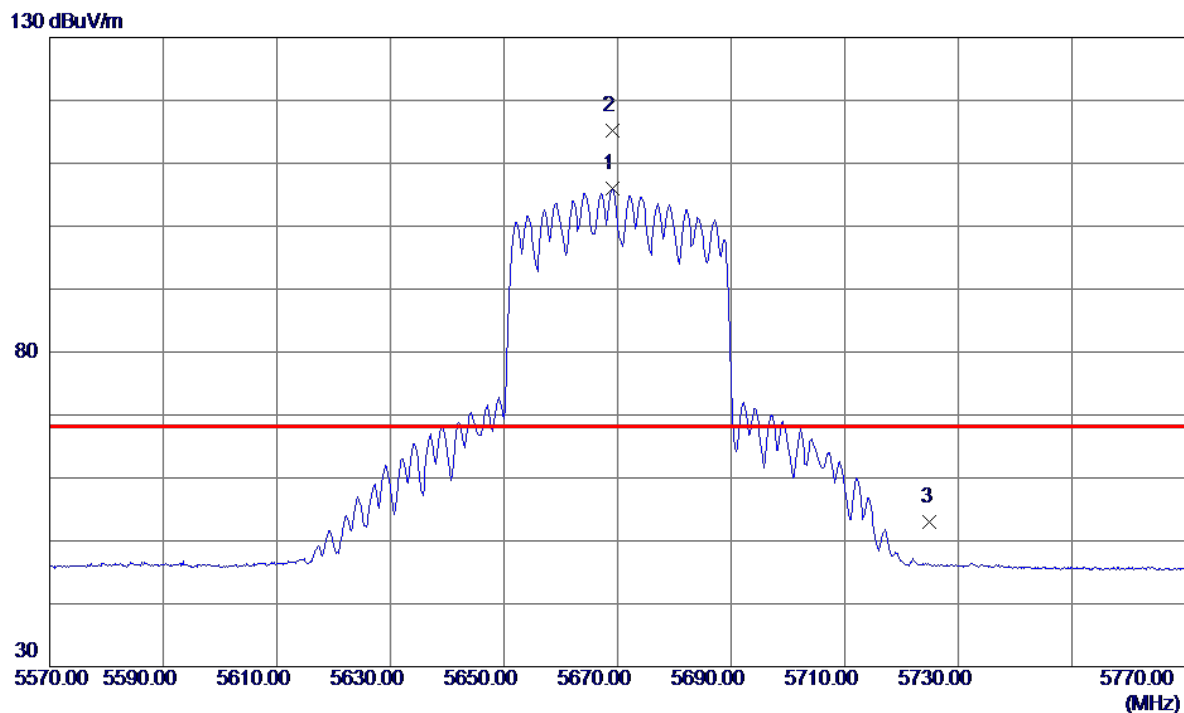


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5669.1000	91.25	14.74	105.99	999.00	-893.01	AVG	No Limit
2 *	5669.2000	100.52	14.74	115.26	68.20	47.06	Peak	No Limit
3	5725.0000	38.04	14.93	52.97	68.20	-15.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

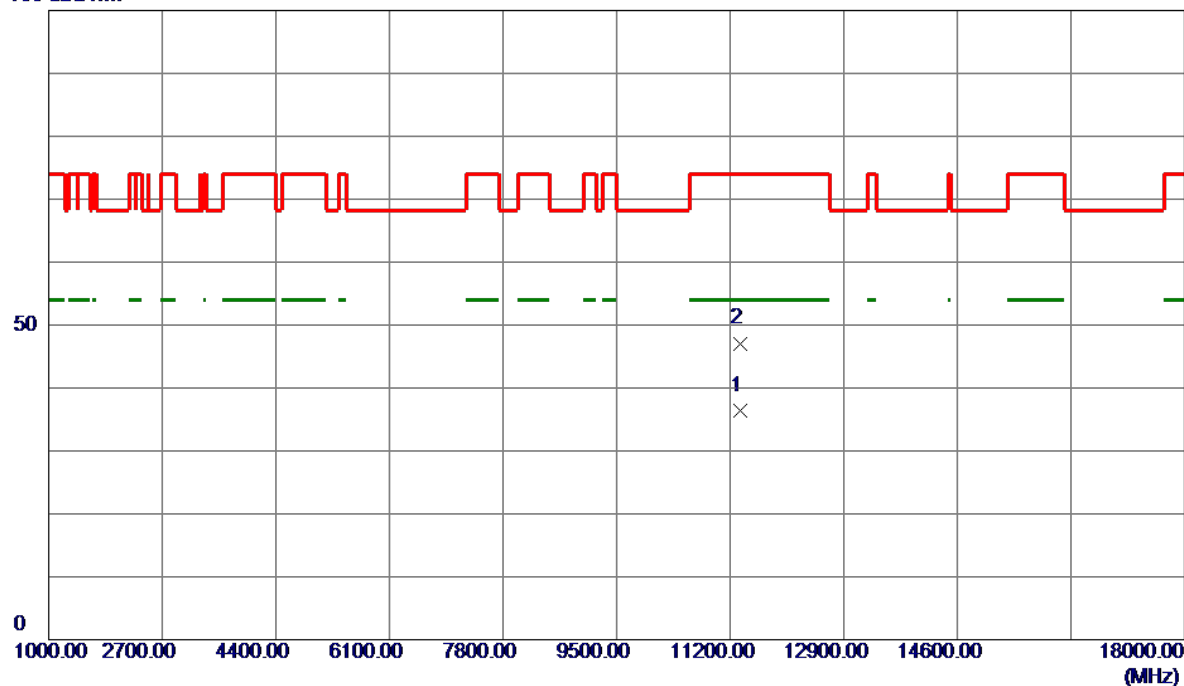


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11347.0500	26.93	9.48	36.41	54.00	-17.59	AVG	
2	11349.2500	37.61	9.49	47.10	74.00	-26.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

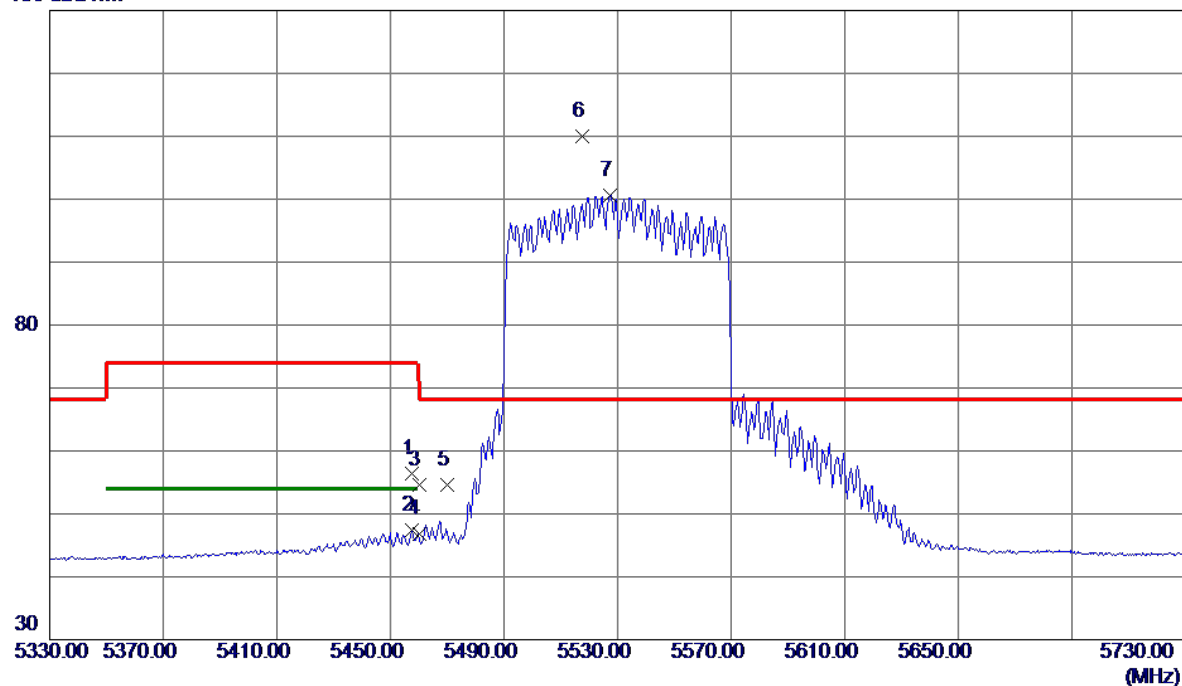


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.6000	42.21	14.10	56.31	74.00	-17.69	Peak	
2	5457.6000	33.22	14.10	47.32	54.00	-6.68	AVG	
3	5460.0000	40.42	14.10	54.52	74.00	-19.48	Peak	
4	5460.0000	32.61	14.10	46.71	54.00	-7.29	AVG	
5	5470.0000	40.57	14.12	54.69	68.20	-13.51	Peak	
6 *	5517.6000	95.75	14.25	110.00	68.20	41.80	Peak	No Limit
7	5527.4000	86.39	14.28	100.67	999.00	-898.33	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

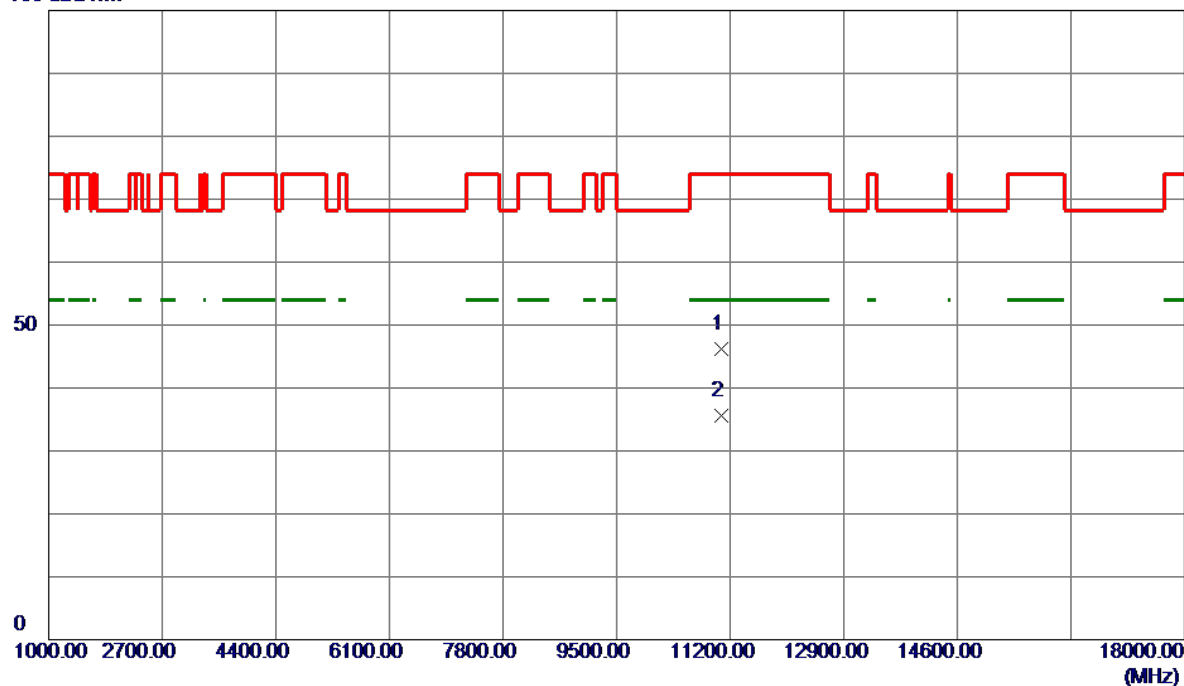


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11066.3500	37.02	9.20	46.22	74.00	-27.78	Peak	
2 *	11068.7400	26.47	9.20	35.67	54.00	-18.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

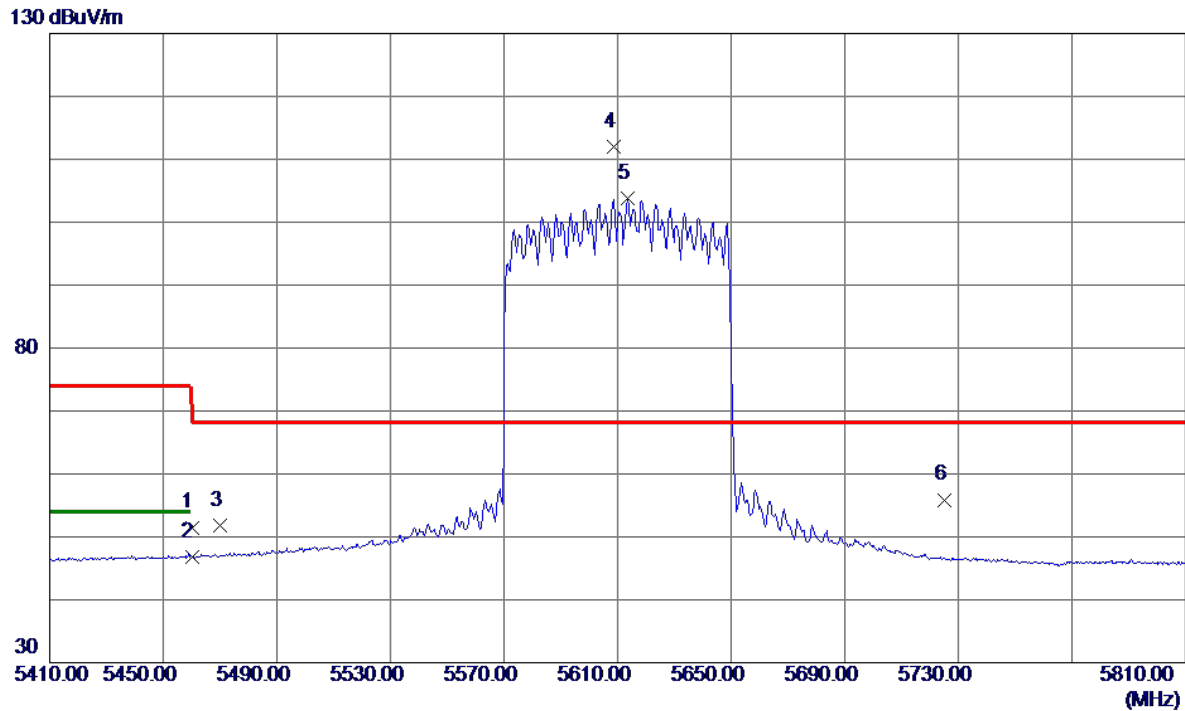


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.40	14.10	51.50	74.00	-22.50	Peak	
2	5460.0000	32.67	14.10	46.77	54.00	-7.23	AVG	
3	5470.0000	37.64	14.12	51.76	68.20	-16.44	Peak	
4 *	5608.8000	97.46	14.55	112.01	68.20	43.81	Peak	No Limit
5	5613.6000	89.22	14.56	103.78	999.00	-895.22	AVG	No Limit
6	5725.0000	40.97	14.93	55.90	68.20	-12.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

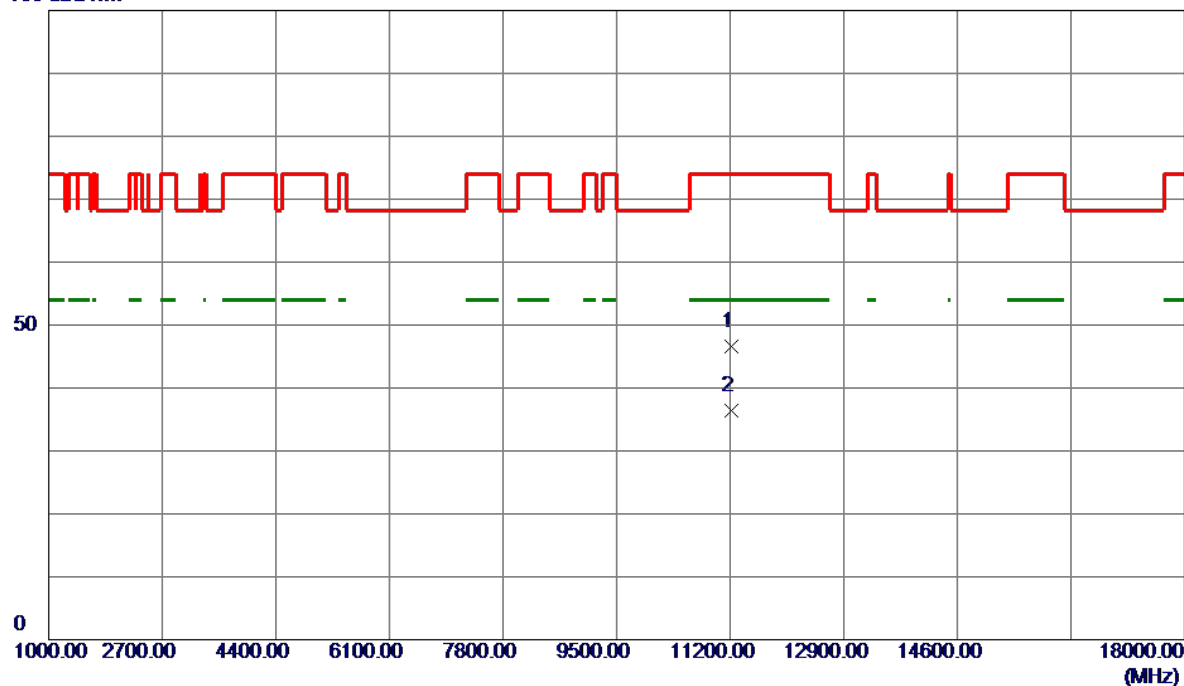


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11219.2900	37.26	9.35	46.61	74.00	-27.39	Peak	
2 *	11224.5000	27.04	9.36	36.40	54.00	-17.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

130 dBuV/m

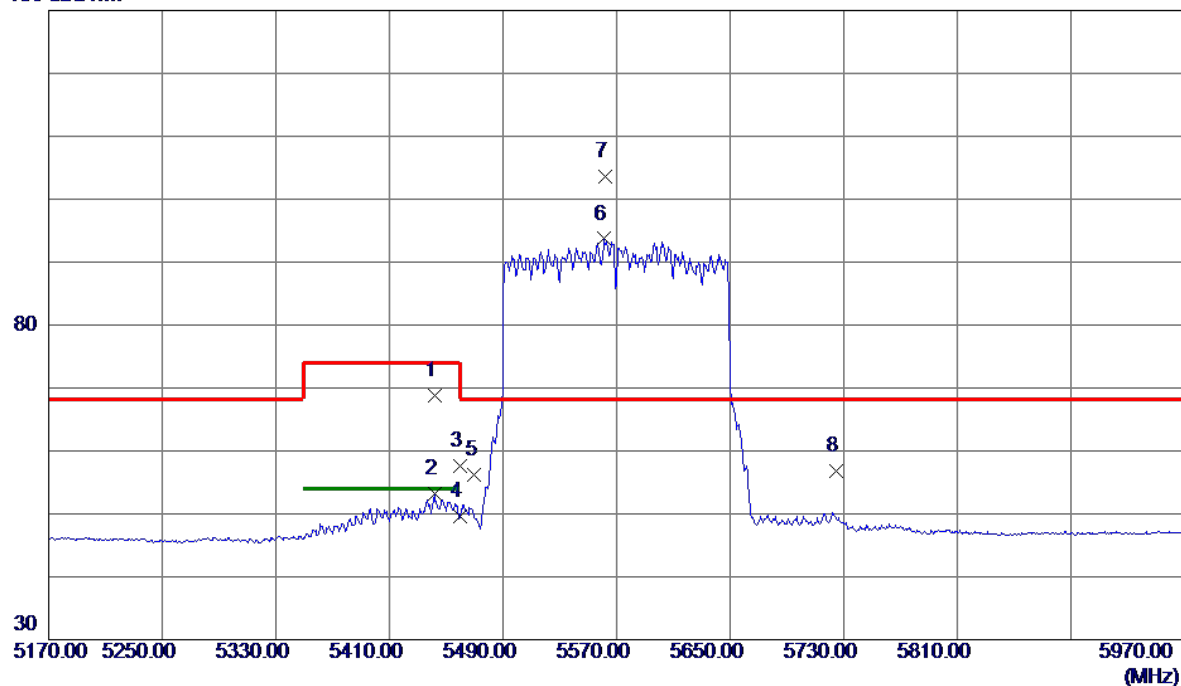


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5441.6000	52.88	15.92	68.80	74.00	-5.20	Peak	
2	5441.6000	37.34	15.92	53.26	54.00	-0.74	AVG	
3	5460.0000	41.69	15.96	57.65	74.00	-16.35	Peak	
4	5460.0000	33.70	15.96	49.66	54.00	-4.34	AVG	
5	5470.0000	40.30	15.98	56.28	68.20	-11.92	Peak	
6	5561.2000	77.47	16.23	93.70	999.00	-905.30	AVG	No Limit
7 *	5561.6000	87.30	16.24	103.54	68.20	35.34	Peak	No Limit
8	5725.0000	40.02	16.76	56.78	68.20	-11.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

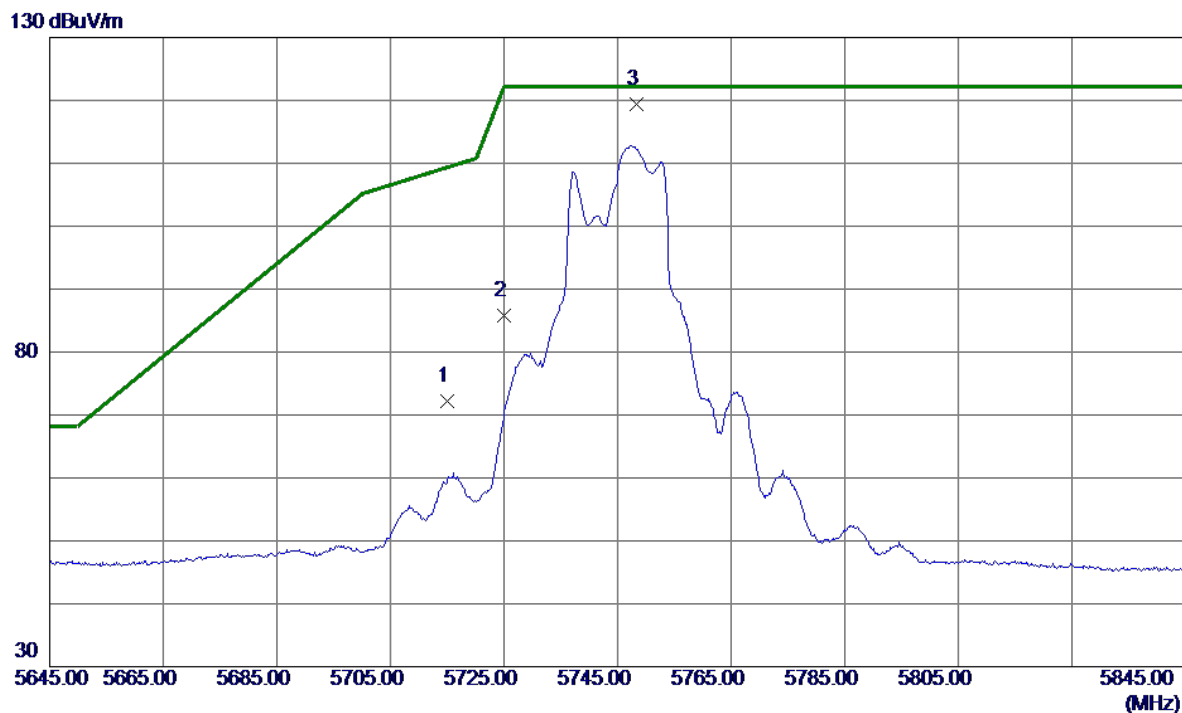


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	57.32	14.90	72.22	109.40	-37.18	Peak	
2	5725.0000	70.96	14.93	85.89	122.20	-36.31	Peak	
3 *	5748.3000	104.34	15.00	119.34	122.20	-2.86	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

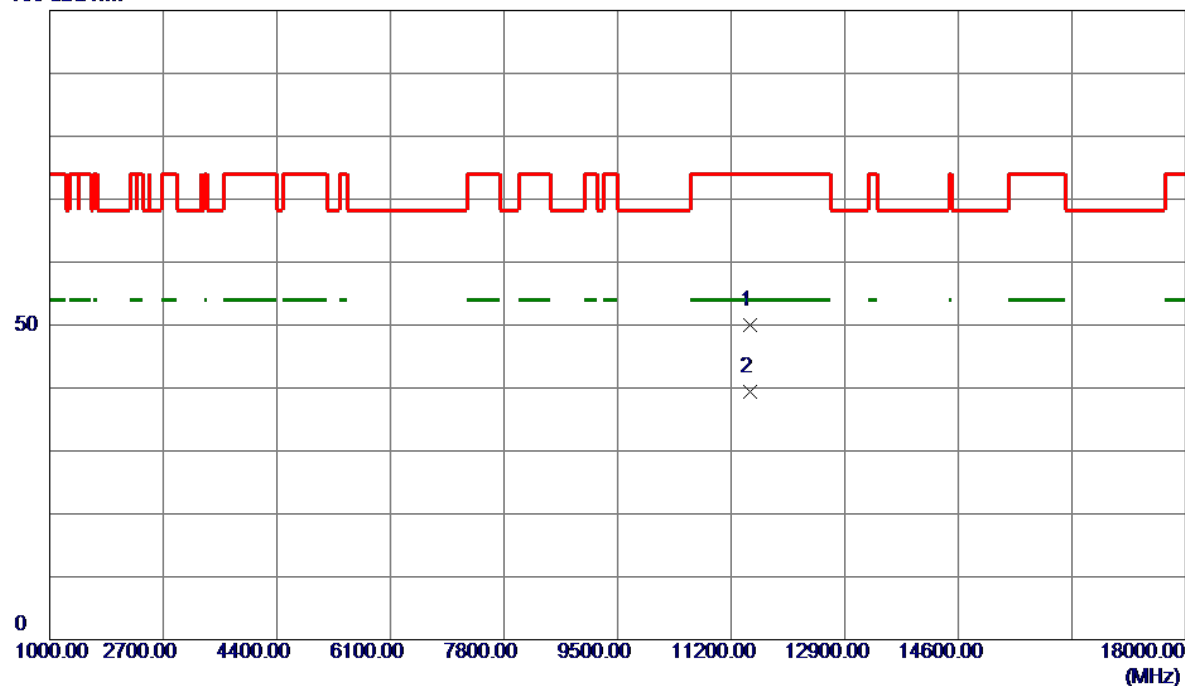


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11492.0500	40.35	9.63	49.98	74.00	-24.02	Peak	
2 *	11492.4500	29.76	9.63	39.39	54.00	-14.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

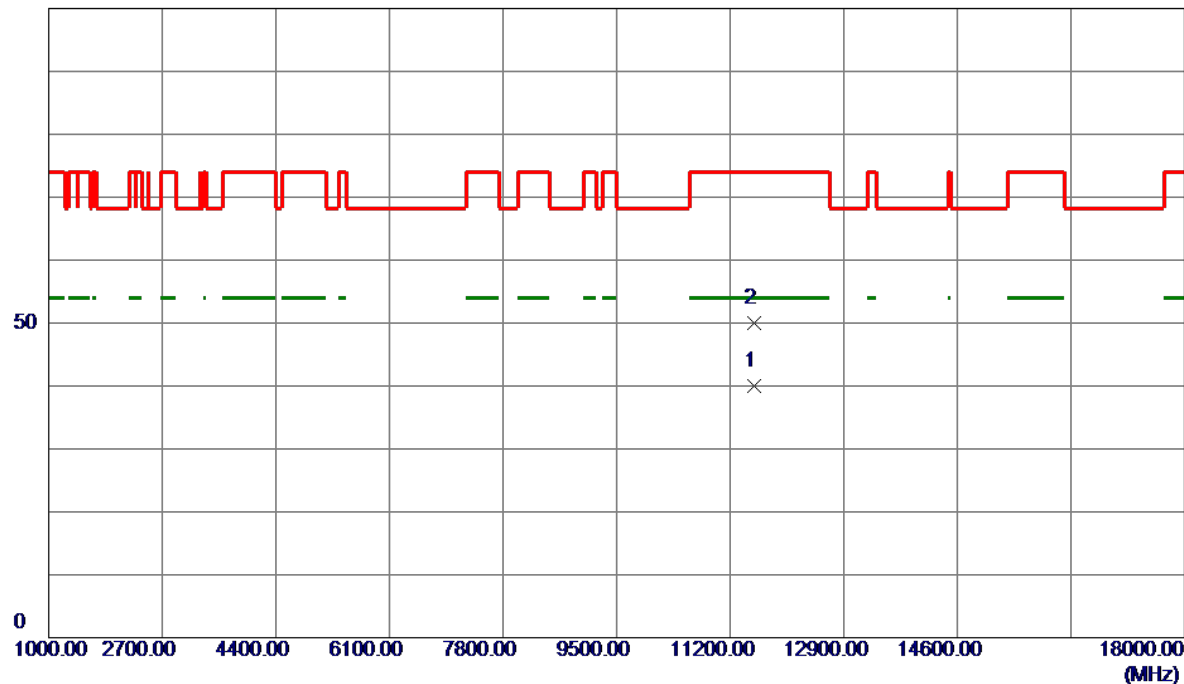


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11566.8000	30.32	9.64	39.96	54.00	-14.04	AVG	
2	11567.9500	40.28	9.64	49.92	74.00	-24.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

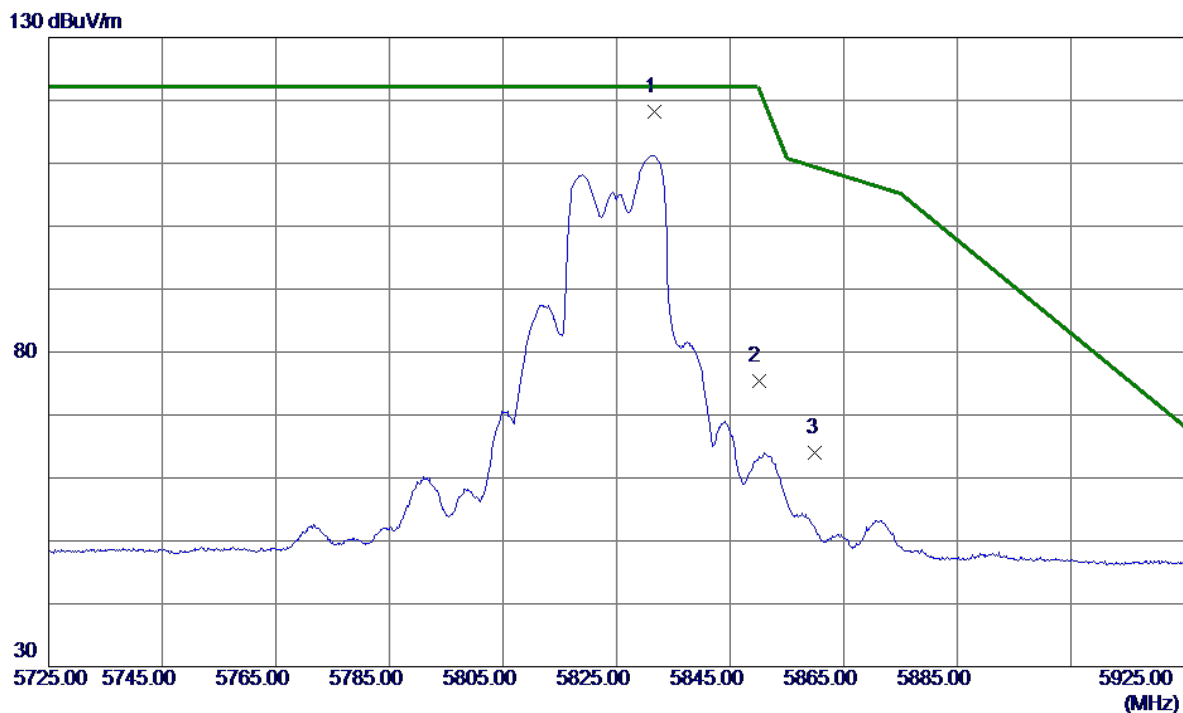


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5831.7000	102.95	15.28	118.23	122.20	-3.97	Peak	No Limit
2	5850.0000	60.08	15.34	75.42	122.20	-46.78	Peak	
3	5860.0000	48.62	15.37	63.99	109.40	-45.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

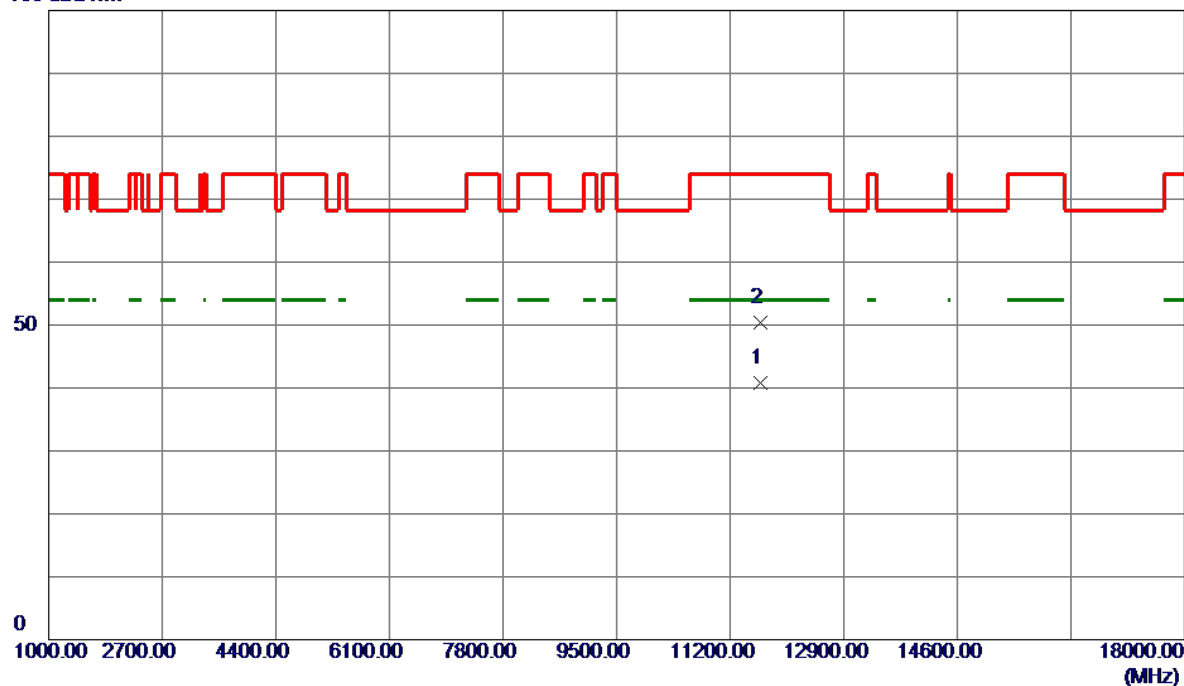


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.2500	31.20	9.65	40.85	54.00	-13.15	AVG	
2	11648.8500	40.77	9.65	50.42	74.00	-23.58	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

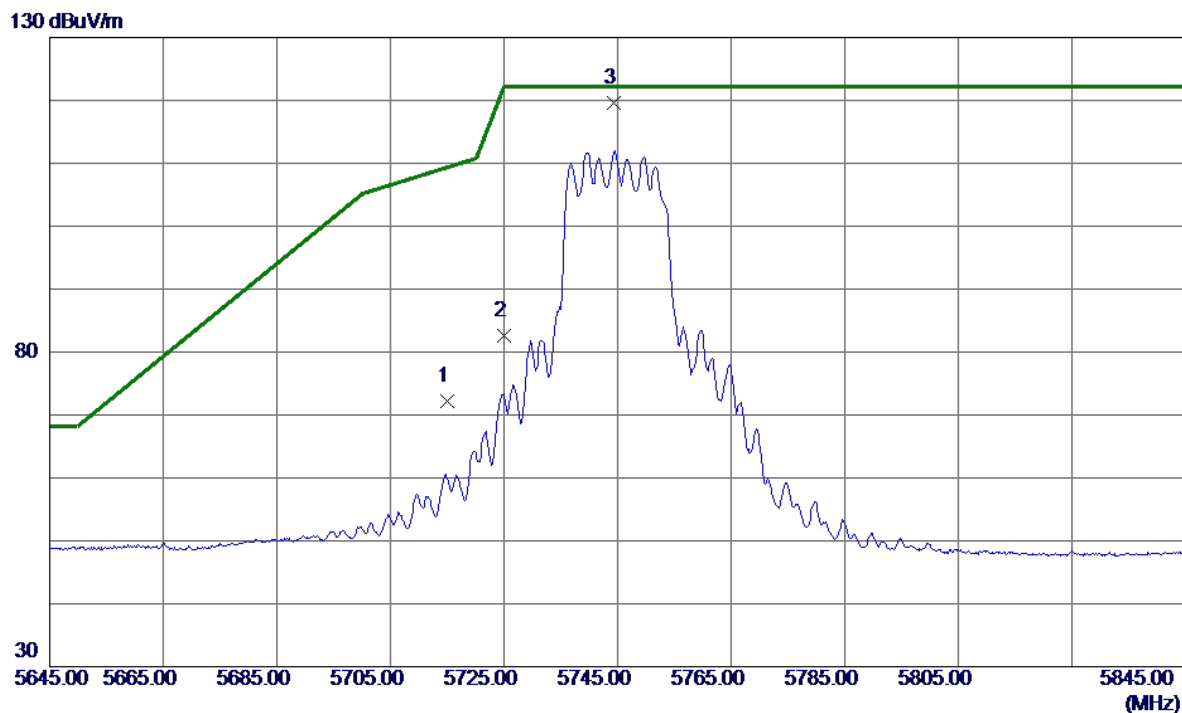


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	57.32	14.90	72.22	109.40	-37.18	Peak	
2	5725.0000	67.69	14.93	82.62	122.20	-39.58	Peak	
3 *	5744.4000	104.58	14.99	119.57	122.20	-2.63	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

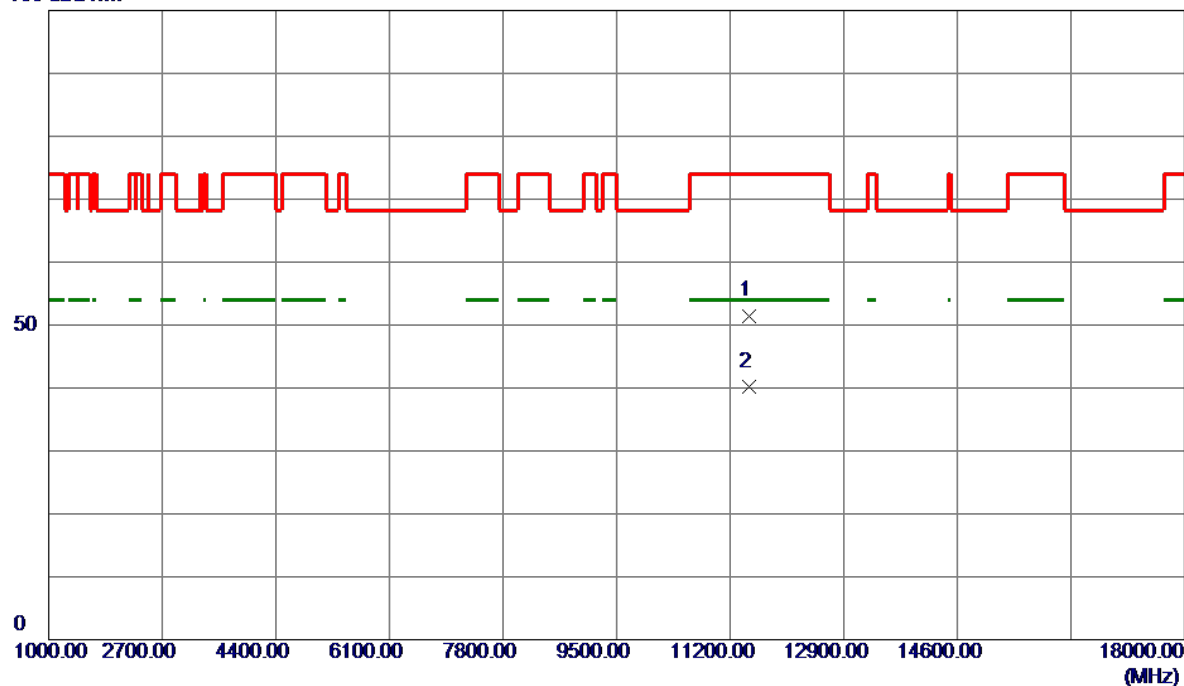


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11485.7750	41.87	9.63	51.50	74.00	-22.50	Peak	
2 *	11490.7000	30.51	9.63	40.14	54.00	-13.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

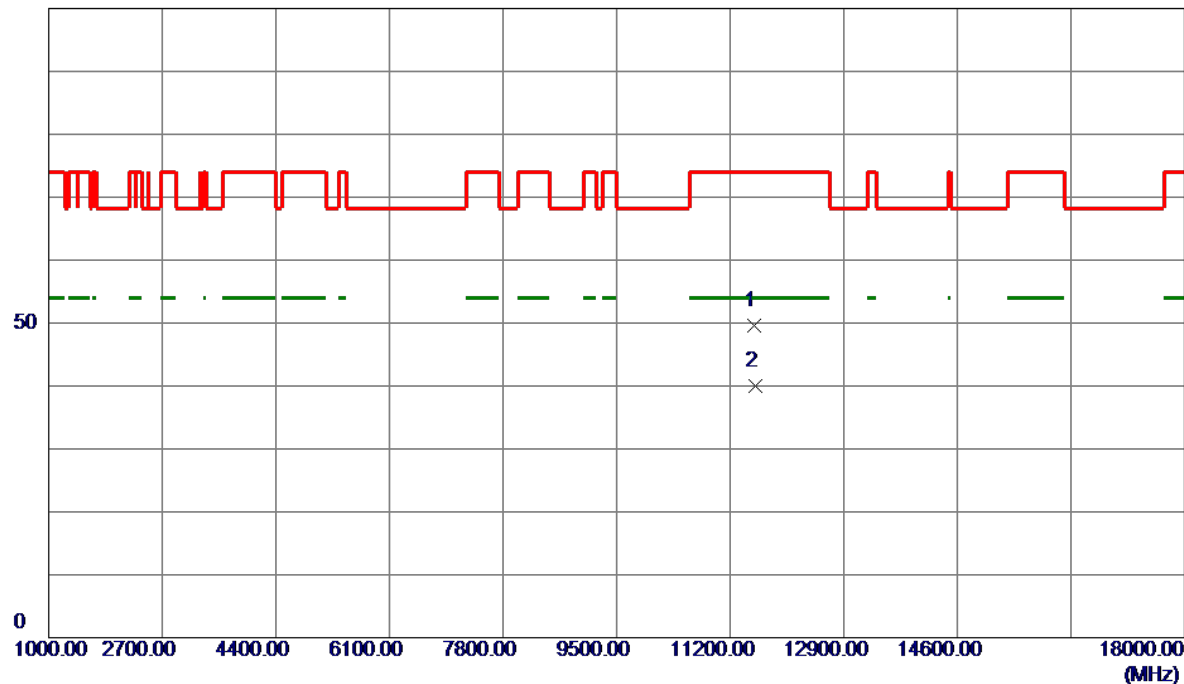


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11565.3500	39.91	9.64	49.55	74.00	-24.45	Peak	
2 *	11570.7500	30.29	9.64	39.93	54.00	-14.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

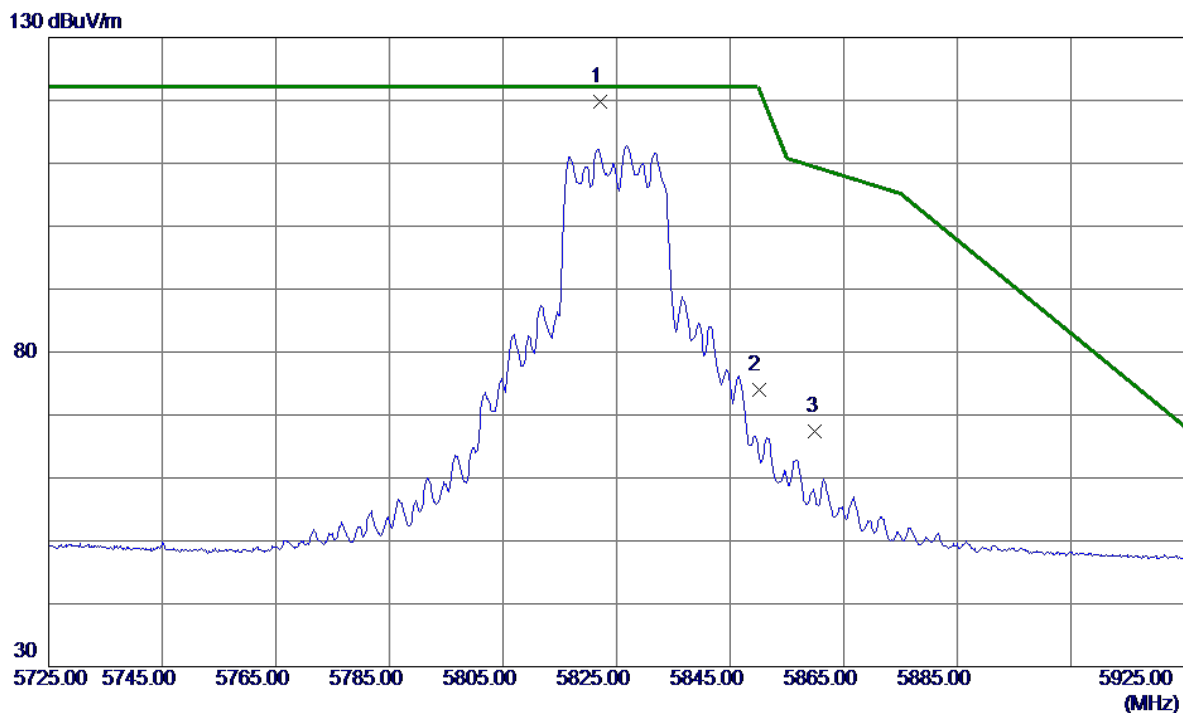


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.1000	104.47	15.25	119.72	122.20	-2.48	Peak	No Limit
2	5850.0000	58.69	15.34	74.03	122.20	-48.17	Peak	
3	5860.0000	51.99	15.37	67.36	109.40	-42.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

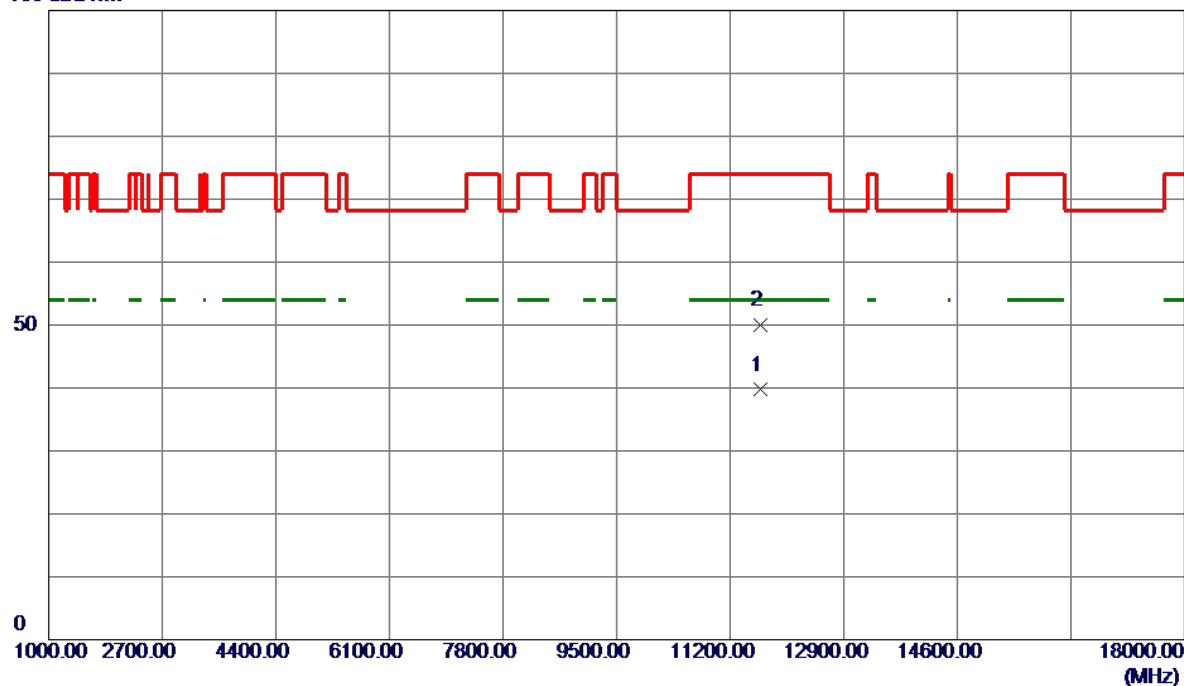


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.4500	30.05	9.65	39.70	54.00	-14.30	AVG	
2	11655.2000	40.32	9.65	49.97	74.00	-24.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

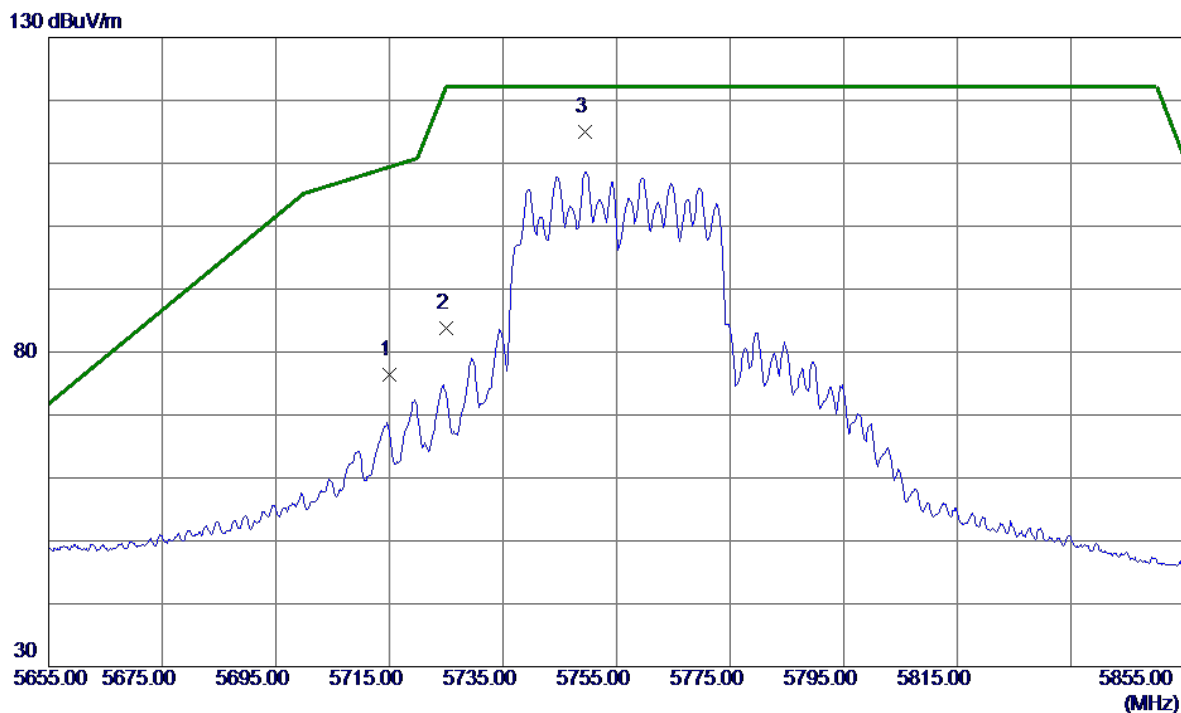


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	61.43	14.90	76.33	109.40	-33.07	Peak	
2	5725.0000	68.83	14.93	83.76	122.20	-38.44	Peak	
3 *	5749.5000	99.89	15.01	114.90	122.20	-7.30	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

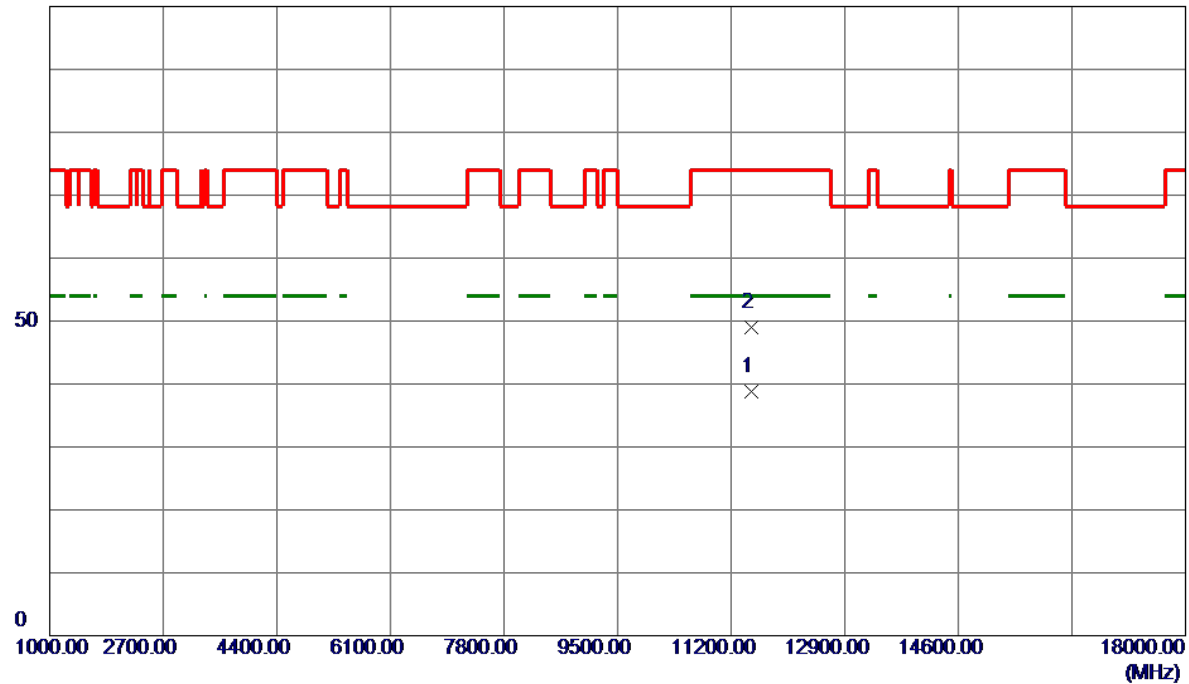


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11505.8500	29.25	9.64	38.89	54.00	-15.11	AVG	
2	11507.4000	39.36	9.64	49.00	74.00	-25.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

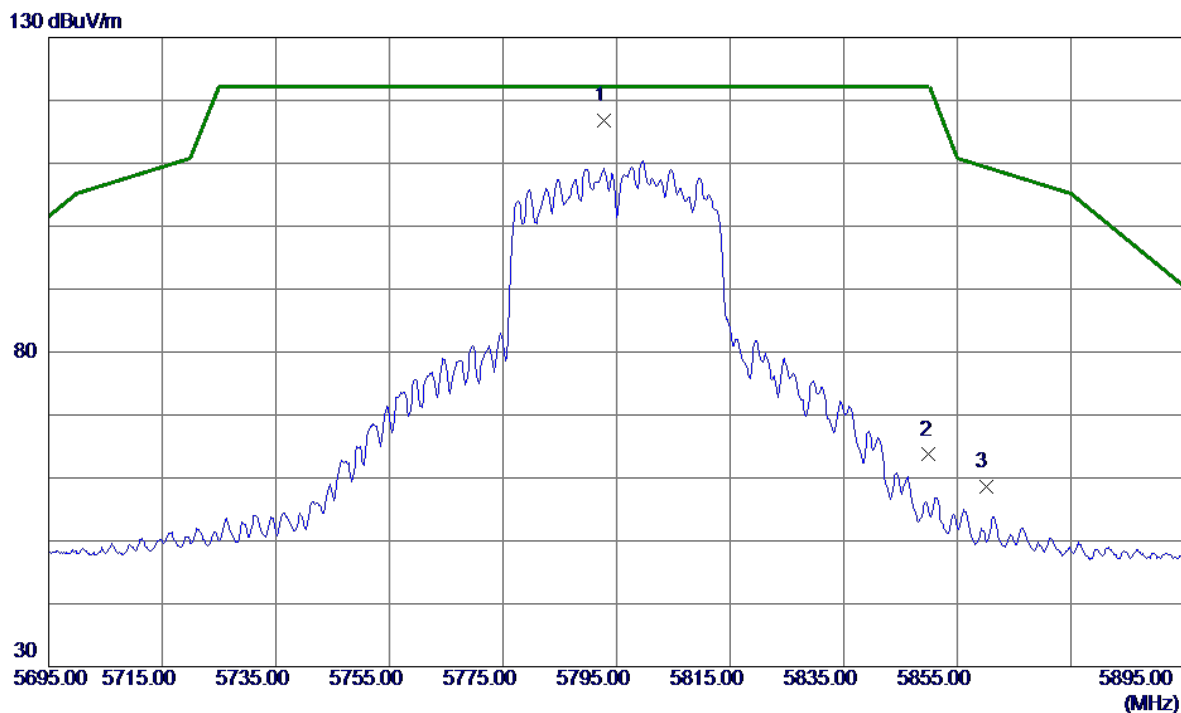


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.7000	101.73	15.15	116.88	122.20	-5.32	Peak	No Limit
2	5850.0000	48.36	15.34	63.70	122.20	-58.50	Peak	
3	5860.0000	43.21	15.37	58.58	109.40	-50.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

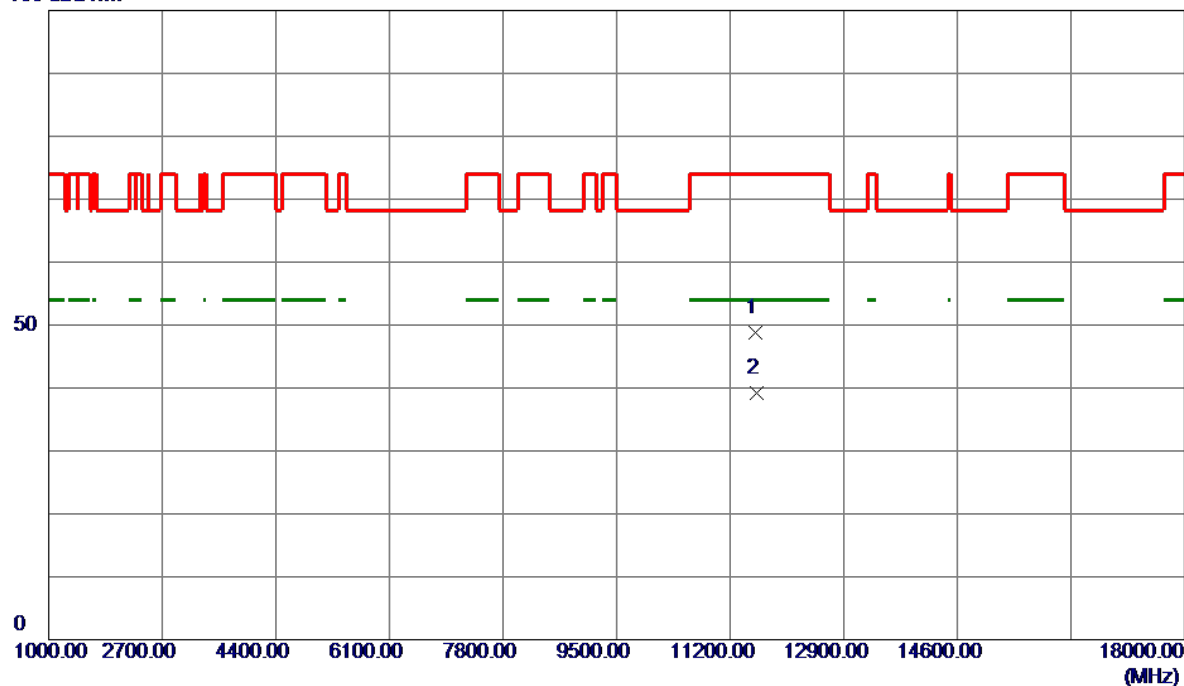


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.6000	39.10	9.64	48.74	74.00	-25.26	Peak	
2 *	11593.9000	29.47	9.64	39.11	54.00	-14.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

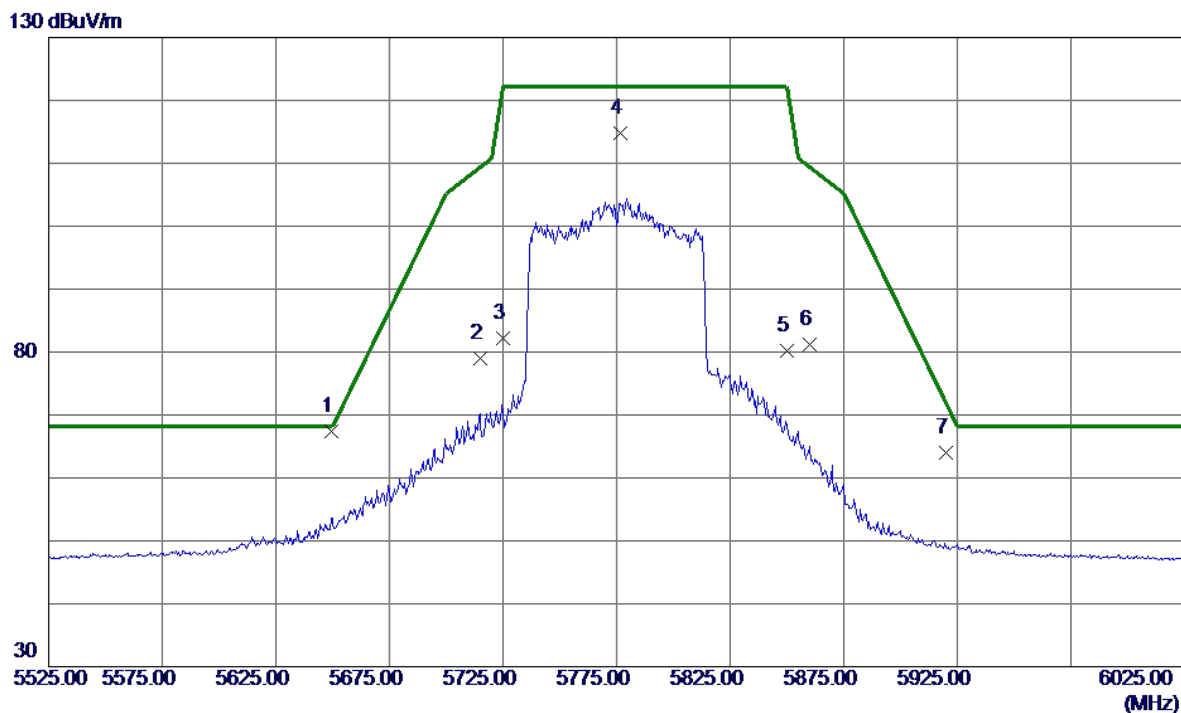

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5649.5000	50.96	16.52	67.48	68.20	-0.72	Peak	
2	5715.0000	62.20	16.72	78.92	109.40	-30.48	Peak	
3	5725.0000	65.50	16.76	82.26	122.20	-39.94	Peak	
4	5776.5000	97.80	16.92	114.72	122.20	-7.48	Peak	No Limit
5	5850.0000	63.10	17.15	80.25	122.20	-41.95	Peak	
6	5860.0000	64.02	17.18	81.20	109.40	-28.20	Peak	
7	5920.2500	46.59	17.38	63.97	71.72	-7.75	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

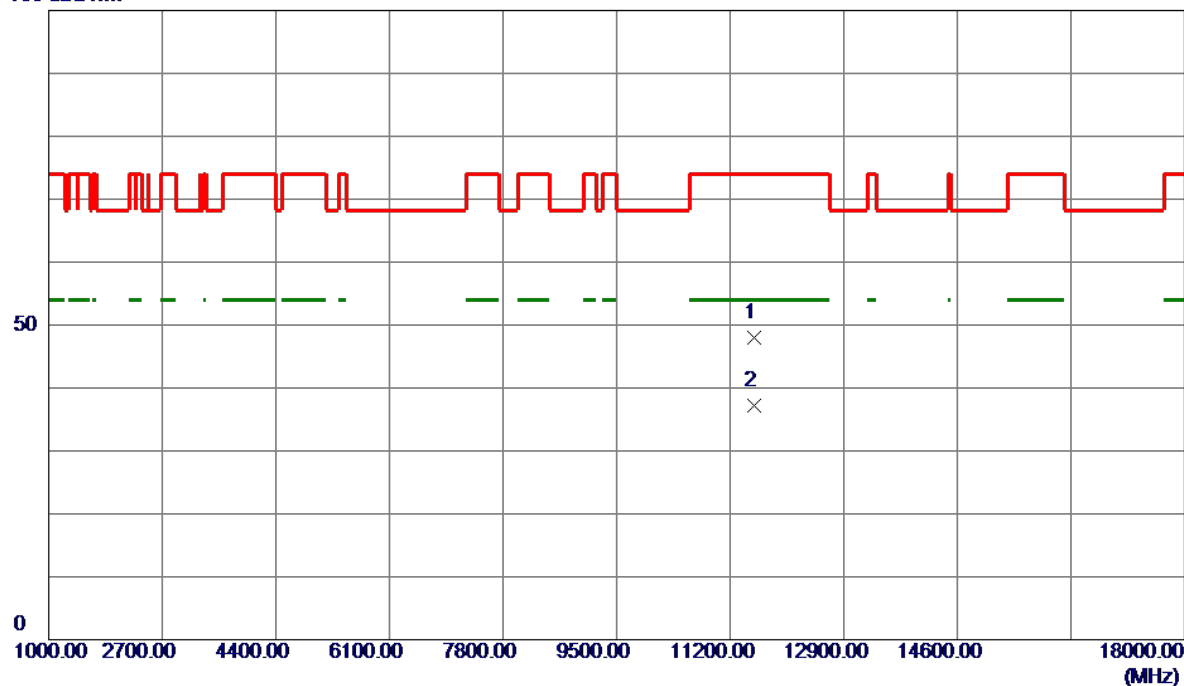


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11555.3500	38.33	9.64	47.97	74.00	-26.03	Peak	
2 *	11559.4000	27.59	9.64	37.23	54.00	-16.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

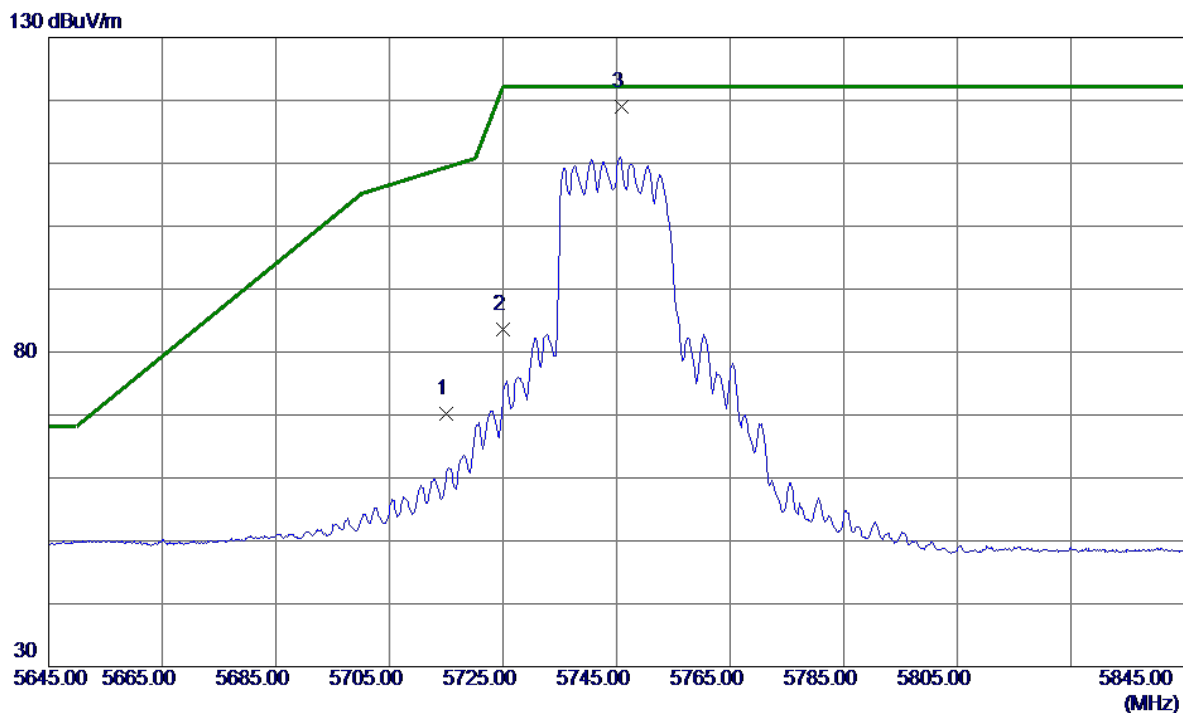


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	55.27	14.90	70.17	109.40	-39.23	Peak	
2	5725.0000	68.70	14.93	83.63	122.20	-38.57	Peak	
3 *	5745.8000	103.99	15.00	118.99	122.20	-3.21	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

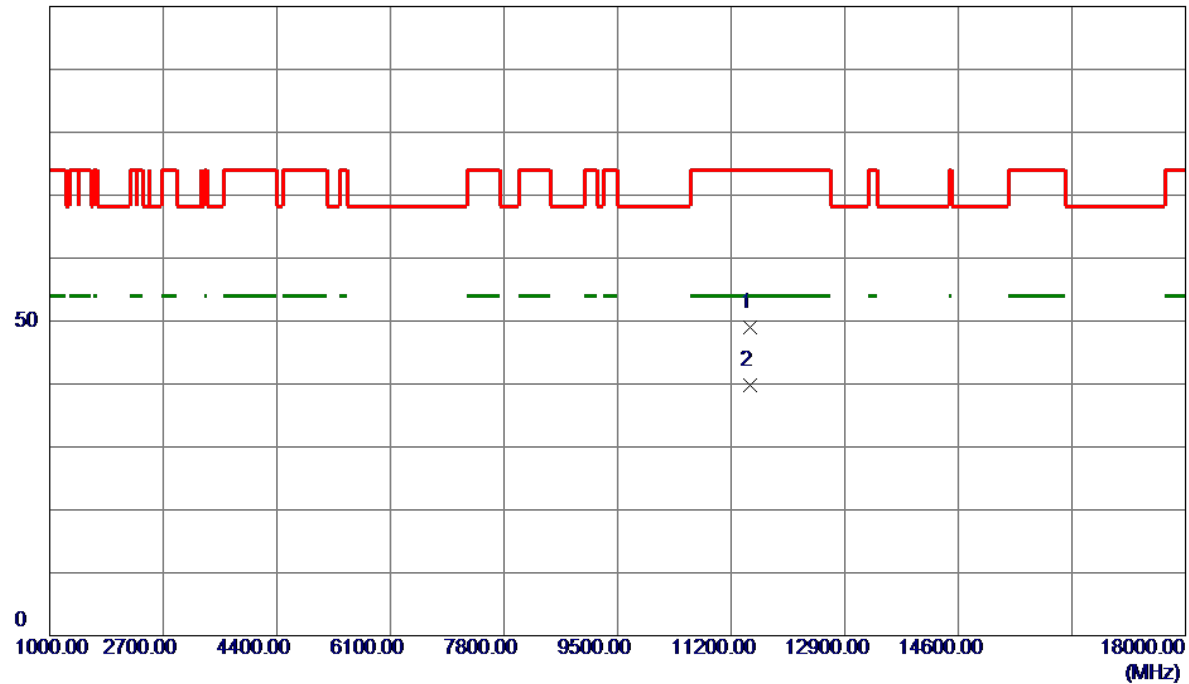


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11485.9600	39.44	9.63	49.07	74.00	-24.93	Peak	
2 *	11490.7400	30.19	9.63	39.82	54.00	-14.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

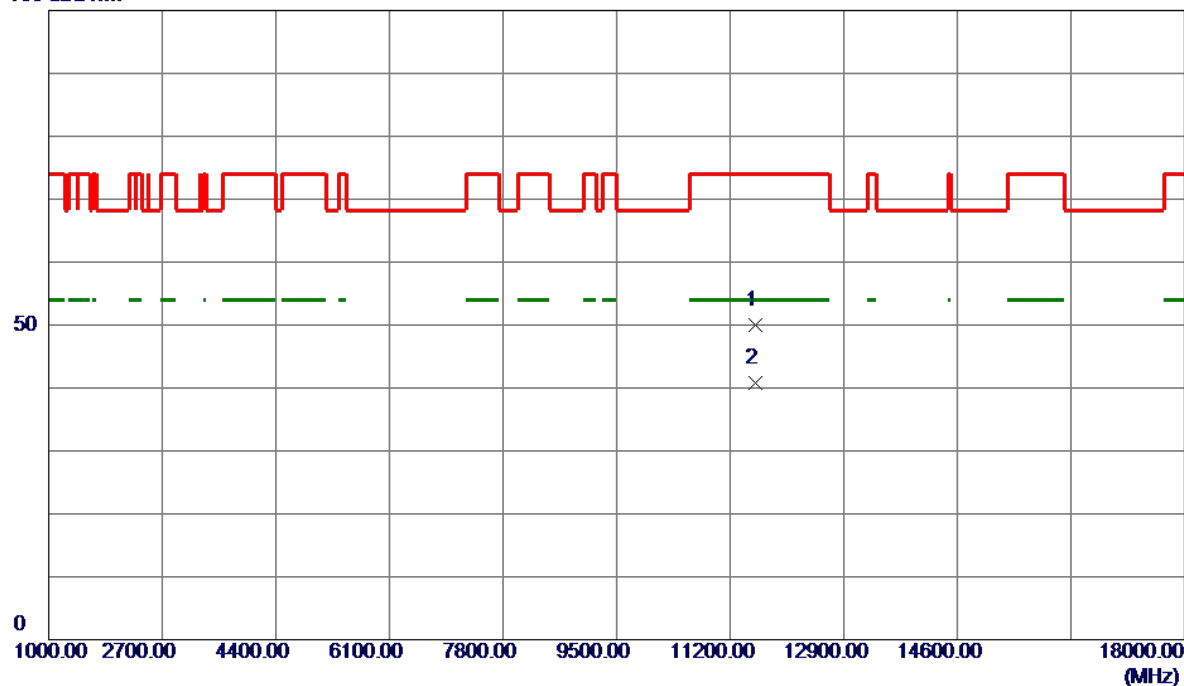


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11569.3300	40.42	9.64	50.06	74.00	-23.94	Peak	
2 *	11570.6100	31.10	9.64	40.74	54.00	-13.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

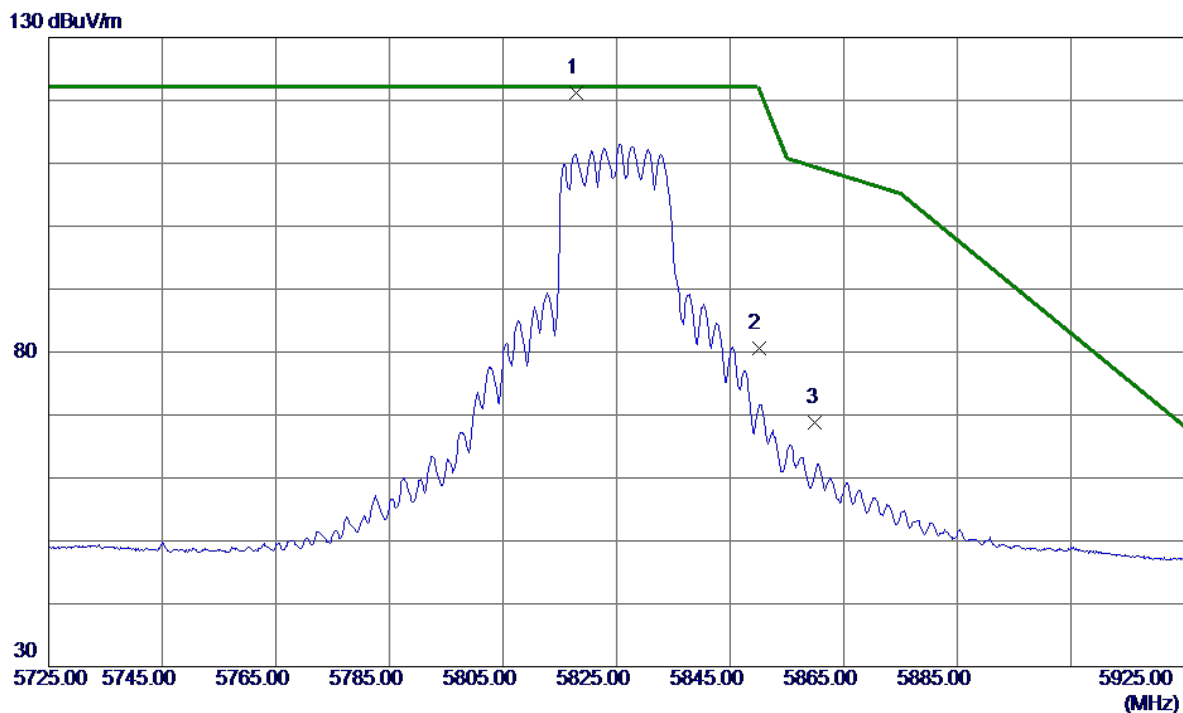


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5817.9000	106.04	15.23	121.27	122.20	-0.93	Peak	No Limit
2	5850.0000	65.24	15.34	80.58	122.20	-41.62	Peak	
3	5860.0000	53.35	15.37	68.72	109.40	-40.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

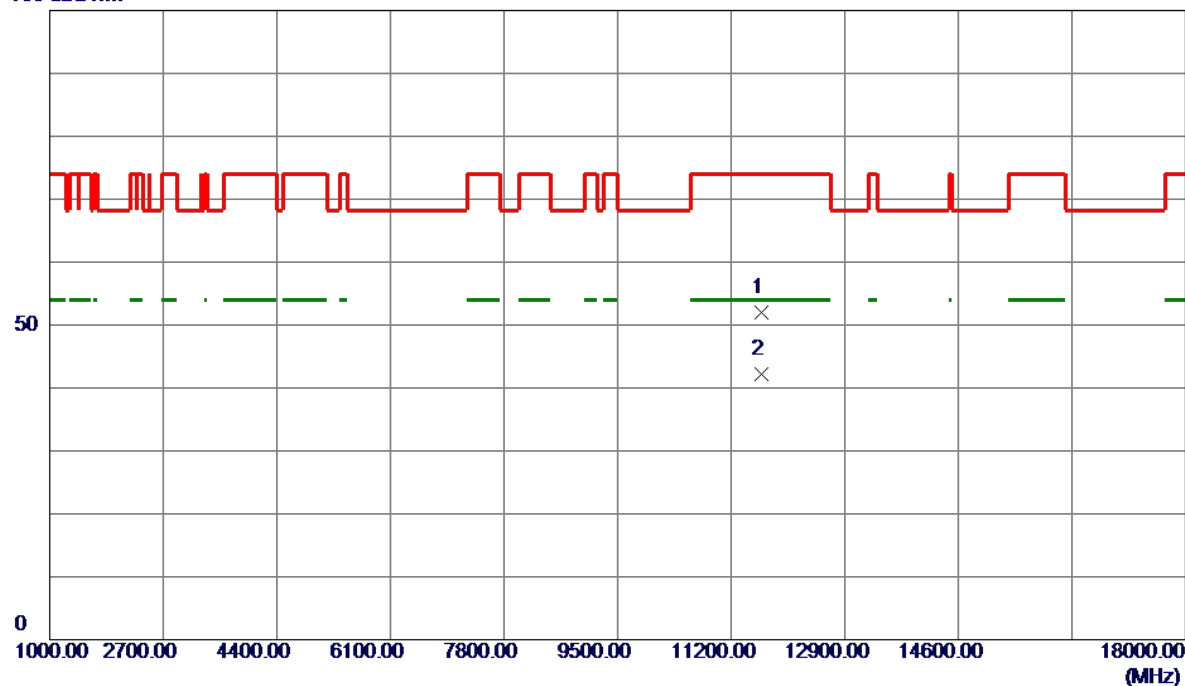


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.0500	42.28	9.65	51.93	74.00	-22.07	Peak	
2 *	11650.6400	32.48	9.65	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

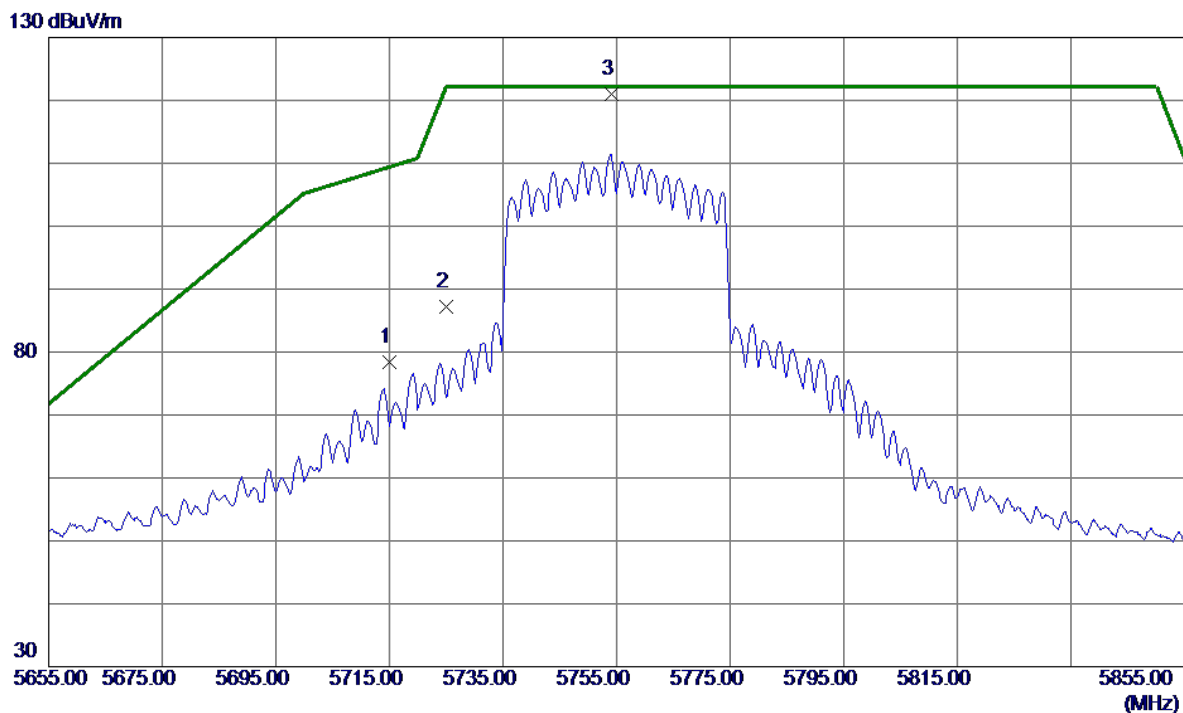


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	63.51	14.90	78.41	109.40	-30.99	Peak	
2	5725.0000	72.19	14.93	87.12	122.20	-35.08	Peak	
3 *	5754.2000	105.91	15.02	120.93	122.20	-1.27	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

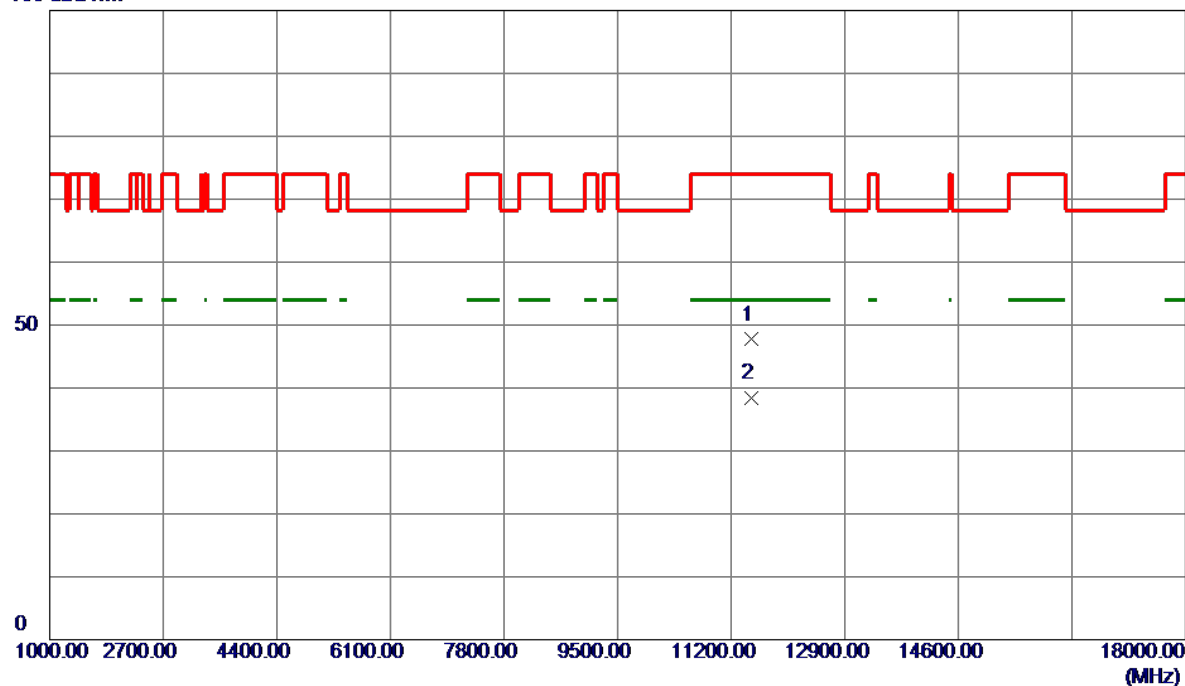


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11500.9750	38.06	9.64	47.70	74.00	-26.30	Peak	
2 *	11505.8750	28.74	9.64	38.38	54.00	-15.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

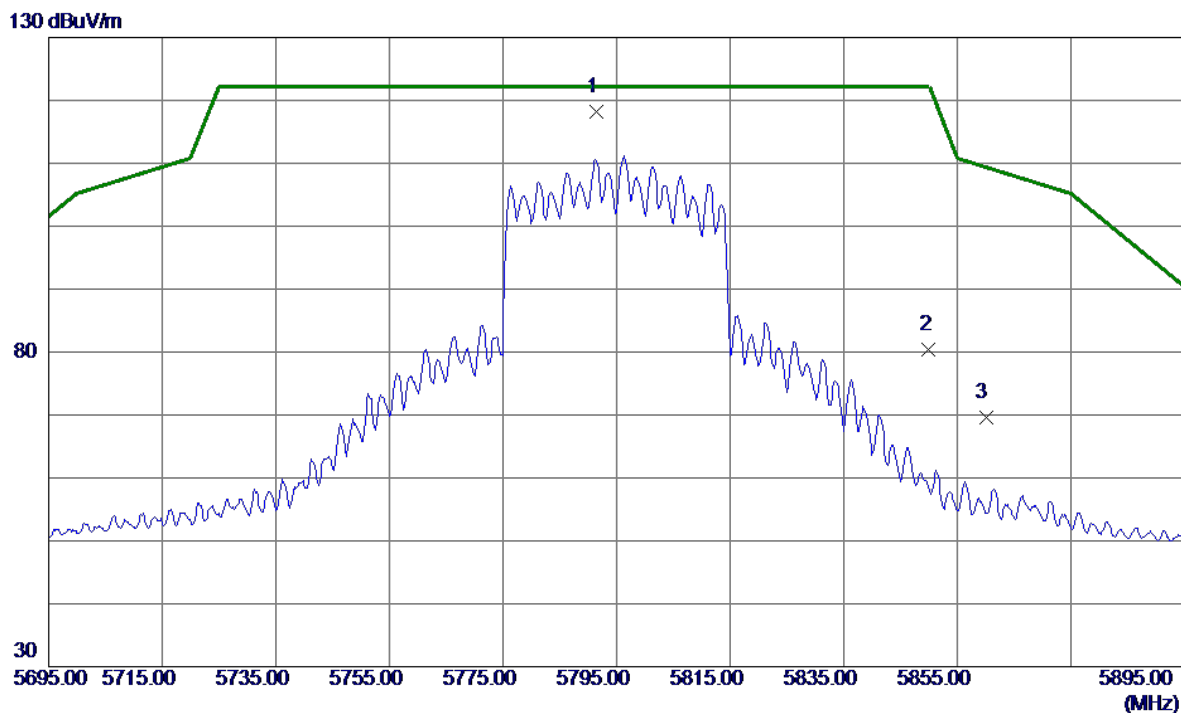


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.4000	102.98	15.15	118.13	122.20	-4.07	Peak	No Limit
2	5850.0000	65.08	15.34	80.42	122.20	-41.78	Peak	
3	5860.0000	54.32	15.37	69.69	109.40	-39.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

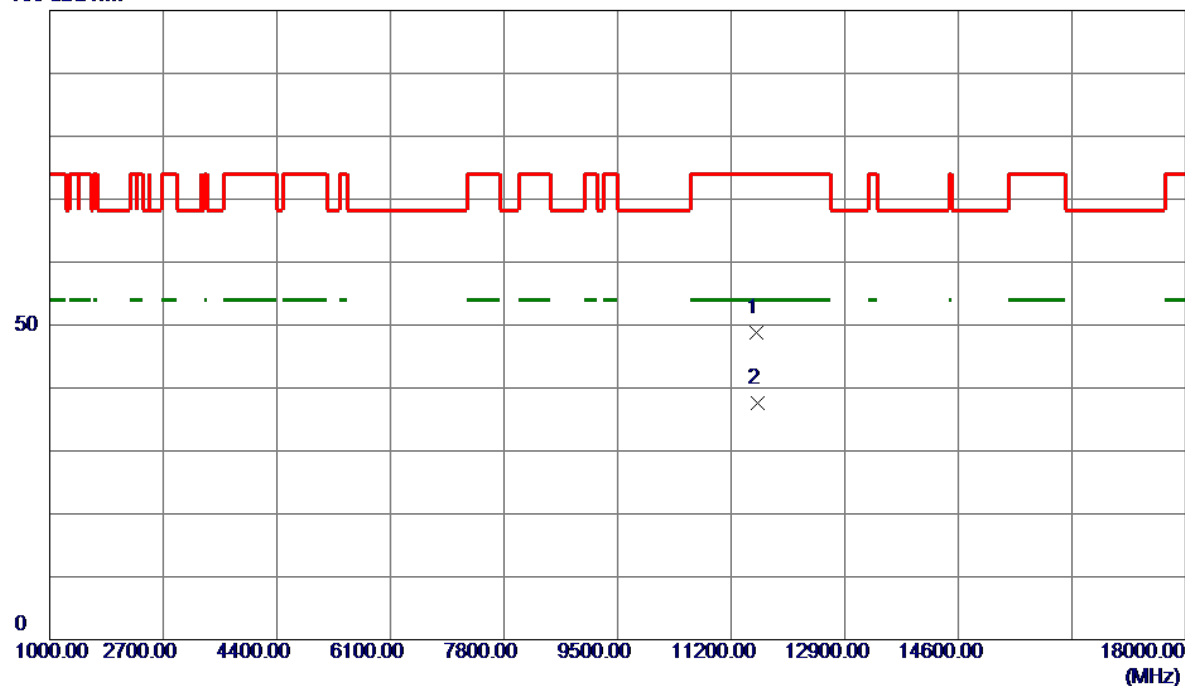


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11580.4750	39.15	9.64	48.79	74.00	-25.21	Peak	
2 *	11589.3000	27.97	9.64	37.61	54.00	-16.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

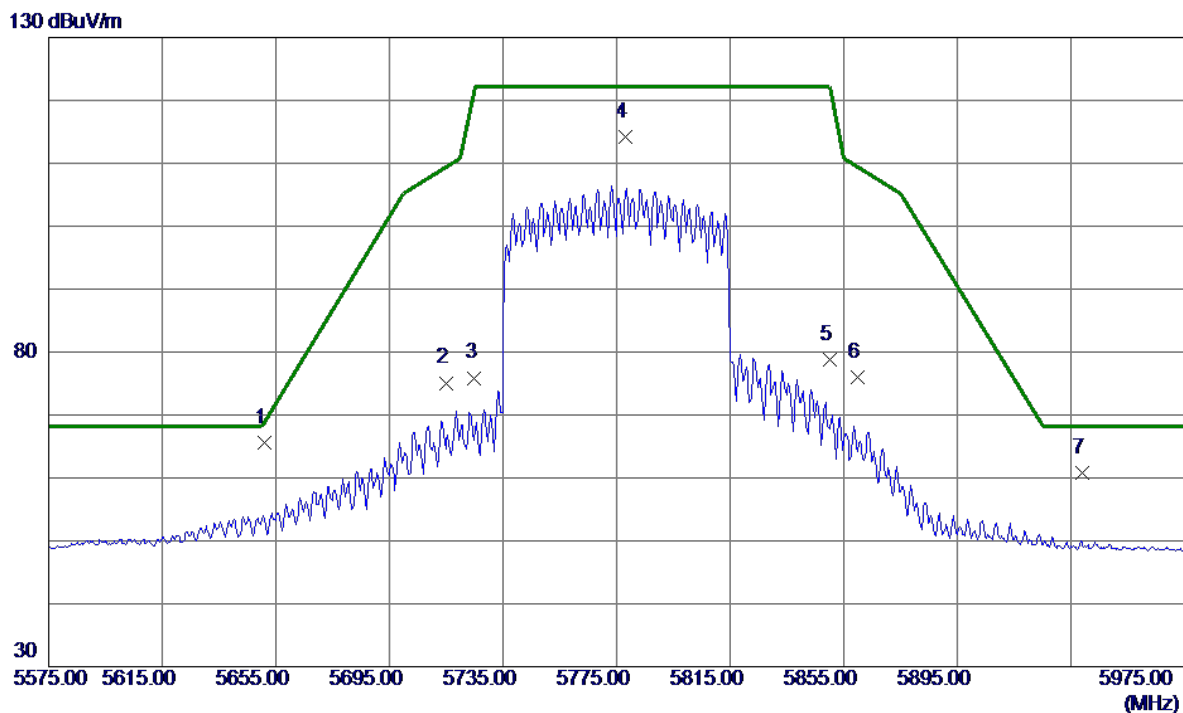


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5651.0000	51.00	14.69	65.69	68.94	-3.25	Peak	
2	5715.0000	60.20	14.90	75.10	109.40	-34.30	Peak	
3	5725.0000	60.97	14.93	75.90	122.20	-46.30	Peak	
4	5778.0000	99.13	15.10	114.23	122.20	-7.97	Peak	No Limit
5	5850.0000	63.44	15.34	78.78	122.20	-43.42	Peak	
6	5860.0000	60.66	15.37	76.03	109.40	-33.37	Peak	
7	5938.8000	45.16	15.63	60.79	68.20	-7.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

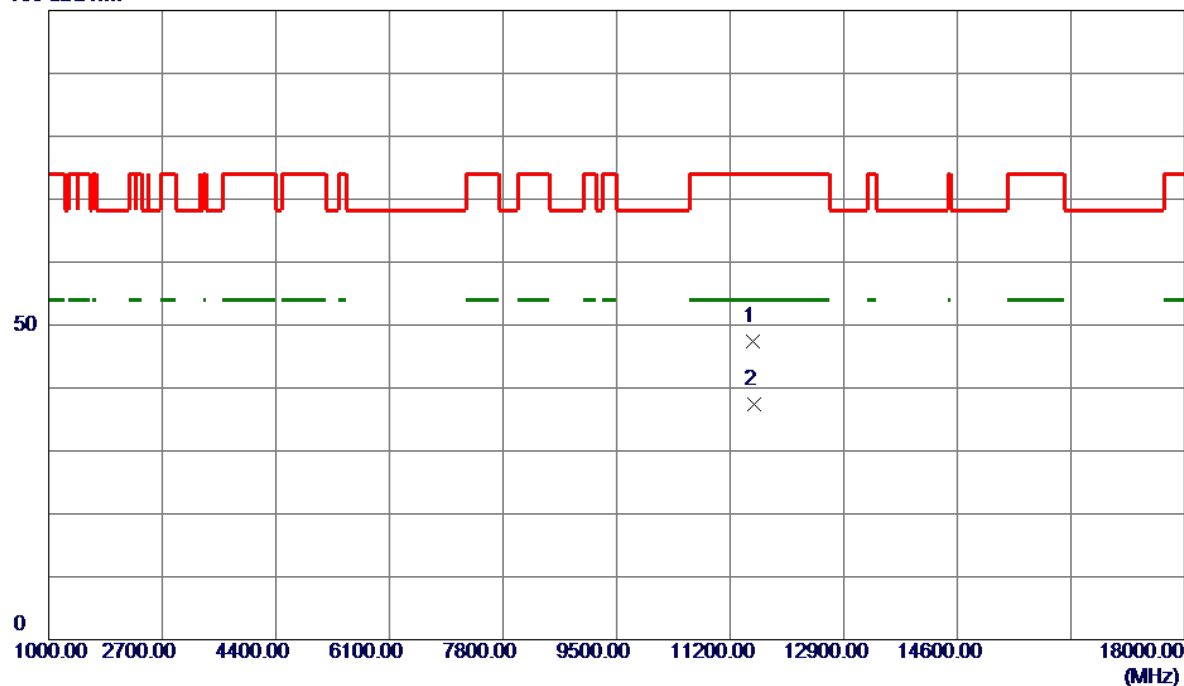


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11539.5000	37.79	9.64	47.43	74.00	-26.57	Peak	
2 *	11560.5000	27.75	9.64	37.39	54.00	-16.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

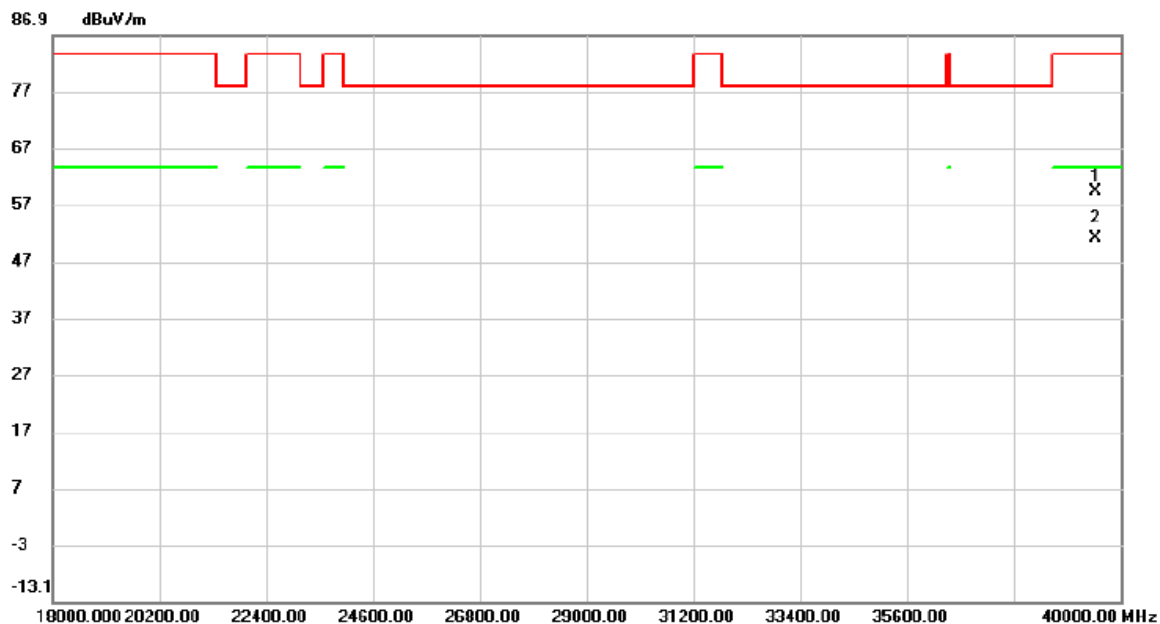

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

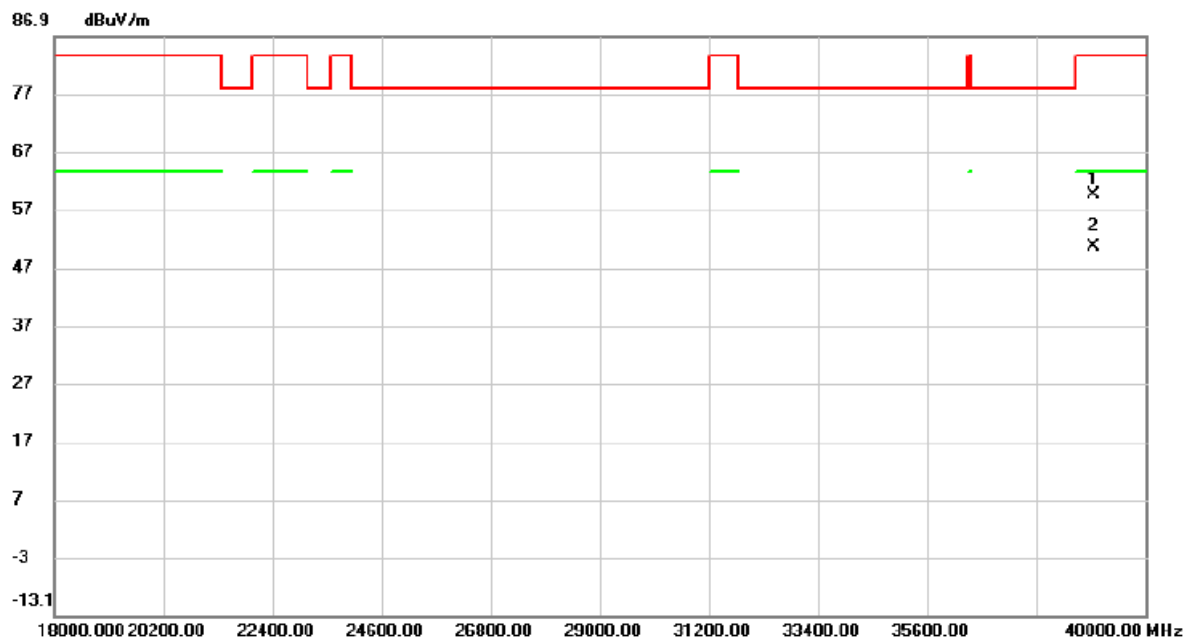

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38944.000	48.26	11.19	59.45	83.50	-24.05	peak	
2	*	38944.000	39.45	11.19	50.64	63.50	-12.86	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	27.050	16.500
40	5200	28.589	16.600
48	5240	23.950	16.500

CH36

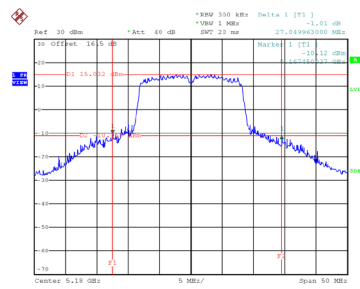


Date: 11.DEC.2024 15:41:55

CH40
26 dB Bandwidth

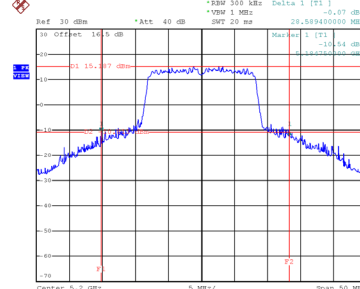


Date: 11.DEC.2024 15:42:37

CH48

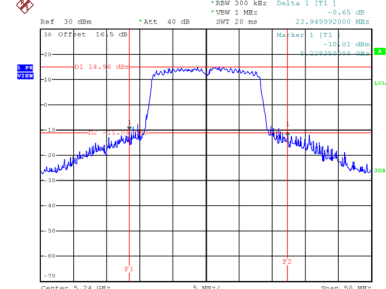


Date: 11.DEC.2024 15:43:22


99 % Occupied Bandwidth

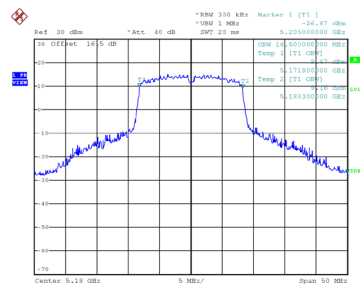

Date: 11.DEC.2024 15:41:15

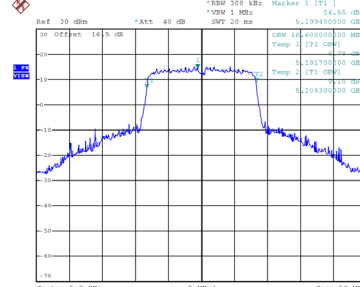

Date: 11.DEC.2024 15:42:11

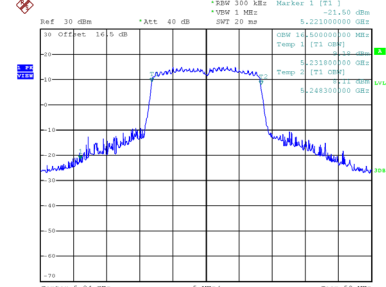


Date: 11.DEC.2024 15:42:52

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	29.050	17.700
40	5200	26.898	17.700
48	5240	28.450	17.700

CH36

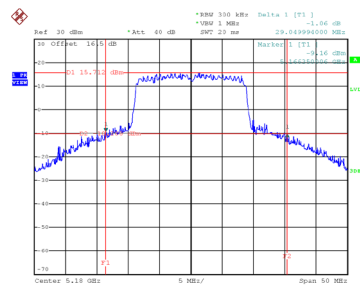


Date: 11.DEC.2024 15:58:12

CH40
26 dB Bandwidth

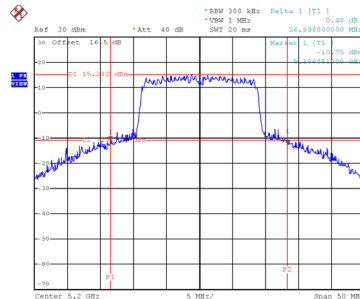


Date: 11.DEC.2024 15:59:40

CH48

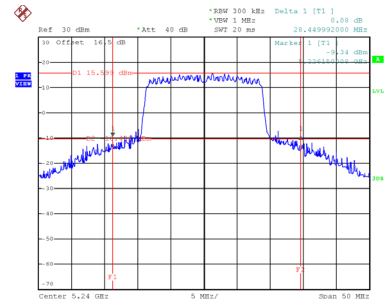


Date: 11.DEC.2024 16:00:23


99 % Occupied Bandwidth

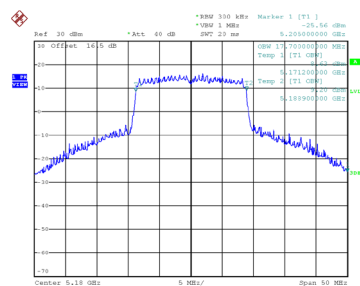

Date: 11.DEC.2024 15:58:12

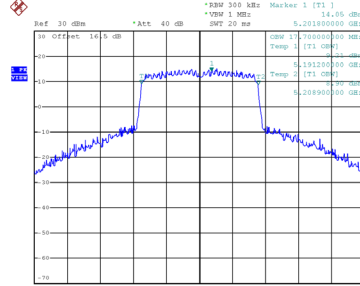

Date: 11.DEC.2024 15:59:06

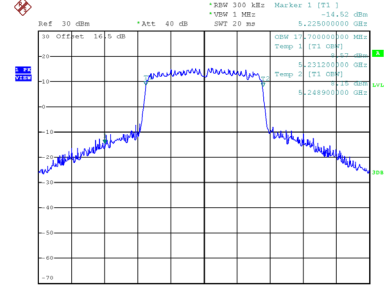


Date: 11.DEC.2024 15:59:17

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	56.984	36.800
46	5230	53.900	36.800

CH38




Date: 11.DEC.2024 16:11:37

CH46 26 dB Bandwidth

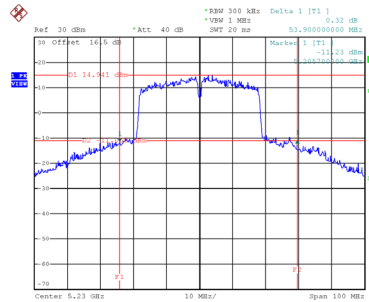


Date: 11.DEC.2024 16:12:42

99 % Occupied Bandwidth

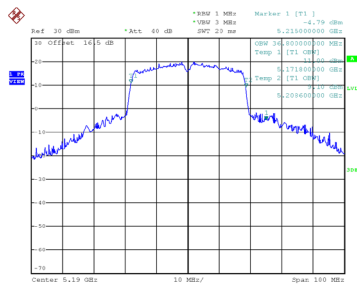

Date: 11.DEC.2024 16:10:34

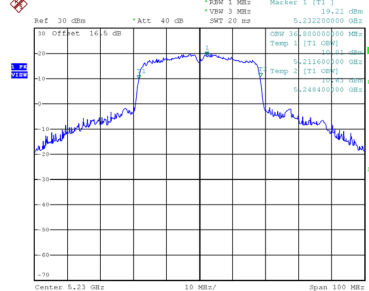


Date: 11.DEC.2024 16:12:05

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	113.600	76.000

CH42 26 dB Bandwidth

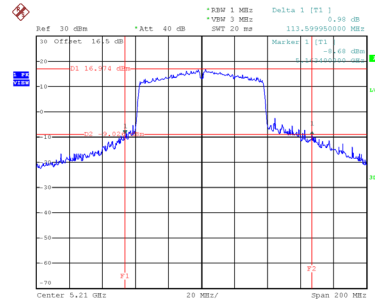

Date: 11.DEC.2024 16:27:16

99 % Occupied Bandwidth

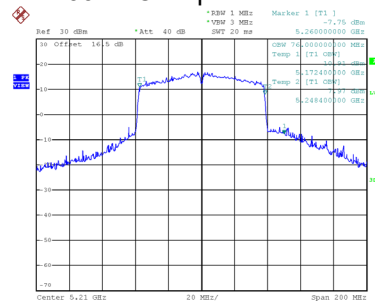


Date: 11.DEC.2024 16:26:30

Test Mode	UNII-1_TX BE(EHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	30.090	19.000
40	5200	29.150	19.100
48	5240	25.799	19.000

CH36




Date: 11.DEC.2024 17:26:27

CH40
26 dB Bandwidth

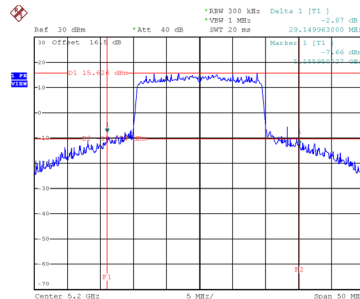


Date: 11.DEC.2024 17:27:13

CH48

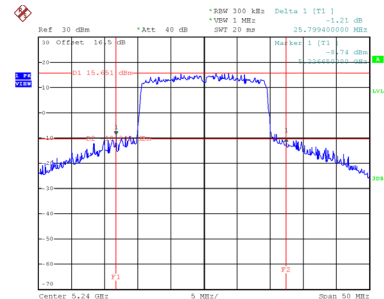


Date: 11.DEC.2024 17:28:05


99 % Occupied Bandwidth

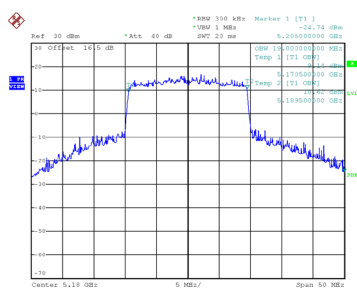

Date: 11.DEC.2024 17:26:13

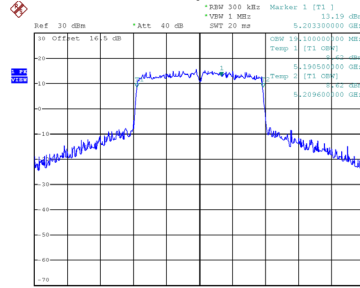

Date: 11.DEC.2024 17:26:38

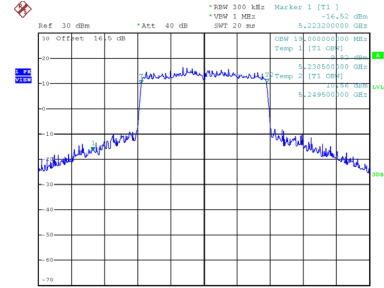

Date: 11.DEC.2024 17:27:28