

FCC Radio Test Report

FCC ID: G95UIW4054

This report concerns: Original Grant

Project No. : 2104C150A
Equipment : Set Top Box
Brand Name : Technicolor
Test Model : UIW4054MIL
Series Model : N/A
Applicant : Technicolor Connected Home USA LLC
Address : 4855 Peachtree Industrial Blvd. , Suite 200, Norcross, GA 30092, USA
Manufacturer : Technicolor Connected Home USA LLC
Address : 4855 Peachtree Industrial Blvd. , Suite 200, Norcross, GA 30092, USA
Factory : 1# Maintek Computer (Suzhou) Co Ltd
2# PT. PEGATRON TECHNOLOGY INDONESIA
Address : 1# 233 Jinfeng Road, New District, Suzhou, Jiangsu, 215011, China
2# JL Beringin, Lot 2/Lot 5/Lot 11 Batam Industrial Park, Muka Kuning,
Sungai Beduk, Batam, 29433, Indonesia
Date of Receipt : Apr. 20, 2021
Date of Test : Apr. 22, 2021 ~ Jul. 16, 2021
Issued Date : Aug. 16, 2021
Report Version : R01
Test Sample : Engineering Sample No.: DG20210420128 and DG2021070533 for
conducted, DG20210420129 and DG2021070533 for radiated.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Ethan Ma

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's
Republic of China

Tel: +86-769-8318-3000

Web: www.newbtl.com



TESTING CERT #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	13
2.3 PARAMETERS OF TEST SOFTWARE	19
2.4 DUTY CYCLE	23
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	26
2.6 SUPPORT UNITS	26
3 . AC POWER LINE CONDUCTED EMISSIONS	27
3.1 LIMIT	27
3.2 TEST PROCEDURE	27
3.3 DEVIATION FROM TEST STANDARD	27
3.4 TEST SETUP	28
3.5 EUT OPERATION CONDITIONS	28
3.6 TEST RESULTS	28
4 . RADIATED EMISSIONS	29
4.1 LIMIT	29
4.2 TEST PROCEDURE	30
4.3 DEVIATION FROM TEST STANDARD	31
4.4 TEST SETUP	31
4.5 EUT OPERATION CONDITIONS	32
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	32
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	32
4.8 TEST RESULTS - ABOVE 1000 MHZ	32
5 . BANDWIDTH	33
5.1 LIMIT	33
5.2 TEST PROCEDURE	33
5.3 DEVIATION FROM STANDARD	33
5.4 TEST SETUP	33

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	33
5.6 TEST RESULTS	33
6 . MAXIMUM OUTPUT POWER	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34
6.5 EUT OPERATION CONDITIONS	34
6.6 TEST RESULTS	34
7 . POWER SPECTRAL DENSITY	35
7.1 LIMIT	35
7.2 TEST PROCEDURE	35
7.3 DEVIATION FROM STANDARD	35
7.4 TEST SETUP	36
7.5 EUT OPERATION CONDITIONS	36
7.6 TEST RESULTS	36
8 . FREQUENCY STABILITY	37
8.1 LIMIT	37
8.2 TEST PROCEDURE	37
8.3 DEVIATION FROM STANDARD	37
8.4 TEST SETUP	37
8.5 EUT OPERATION CONDITIONS	37
8.6 TEST RESULTS	37
9 . MEASUREMENT INSTRUMENTS LIST	38
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	40
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	43
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	48
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	51
APPENDIX E - BANDWIDTH	308
APPENDIX F - MAXIMUM OUTPUT POWER	337
APPENDIX G - POWER SPECTRAL DENSITY	406
APPENDIX H - FREQUENCY STABILITY	435

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 12, 2021
R01	Removed the test photos.	Aug. 16, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☐ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's Republic of China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	-	3.02
		30MHz ~ 200MHz	V	4.26
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	3.98
		200MHz ~ 1,000MHz	H	3.94
		1GHz ~ 6GHz	-	3.96
		6GHz ~ 18GHz	-	5.24
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Power Spectral Density	±0.86 dB
Frequency Stability	±0.16 dB
Temperature	±0.08 °C
Humidity	±1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Laughing Zhang
Radiated Emissions-9kHz to 30MHz	25°C	60%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-30MHz to 1000MHz	26°C	52%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-Above 1000 MHz	26°C	52%	AC 120V/60Hz	Hayden Chen
Bandwidth	24°C	51%	DC 12V	Jesse Wang
Maximum Output Power	24°C	51%	DC 12V	Silly Zheng
Power Spectral Density	24°C	51%	DC 12V	Jesse Wang
Frequency Stability	Normal & Extreme	51%	Normal & Extreme	Jesse Wang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Set Top Box
Brand Name	Technicolor
Test Model	UIW4054MIL
Series Model	N/A
Model Difference(s)	N/A
Software Version	UIW4054MIL_HC_1.0
Hardware Version	LAB1
Power Source	DC voltage supplied from AC adapter. 1# Brand / Model: MASS POWER / E012-1O120100VU 2# Brand / Model: HONOTO / ADS-12HG-12 12012EPCU
Power Rating	1# I/P: 100-240V~, 50/60Hz, 0.4A O/P: 12.0V $\overline{=}$ 1.0A 2# I/P: 100-240V~ 50/60Hz Max. 0.4A O/P: 12V $\overline{=}$ 1.0A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps IEEE 802.11ax: up to 1201 Mbps
Maximum Output Power UNII-1 Non Beamforming	IEEE 802.11n(HT40): 23.39 dBm (0.2183 W)
Maximum Output Power UNII-2A Non Beamforming	IEEE 802.11ax(HE40): 23.57 dBm (0.2275 W)
Maximum Output Power UNII-2C Non Beamforming	IEEE 802.11ac(VHT80): 23.94 dBm (0.2477 W)
Maximum Output Power UNII-3 Non Beamforming	IEEE 802.11ac(VHT40): 24.85 dBm (0.3055 W)
Maximum Output Power UNII-1 Beamforming	IEEE 802.11n(HT40): 23.24 dBm (0.2109 W)
Maximum Output Power UNII-2A Beamforming	IEEE 802.11ac(VHT40): 23.28 dBm (0.2128 W)
Maximum Output Power UNII-2C Beamforming	IEEE 802.11ac(VHT80): 23.82 dBm (0.2410 W)
Maximum Output Power UNII-3 Beamforming	IEEE 802.11ac(VHT40): 24.70 dBm (0.2951 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Internal	N/A	5.83	UNII-1
2	N/A	N/A	Internal	N/A	5.61	
1	N/A	N/A	Internal	N/A	5.83	UNII-2A
2	N/A	N/A	Internal	N/A	5.61	
1	N/A	N/A	Internal	N/A	5.29	UNII-2C
2	N/A	N/A	Internal	N/A	5.26	
1	N/A	N/A	Internal	N/A	5.61	UNII-3
2	N/A	N/A	Internal	N/A	5.67	

Note:

- For CDD: UNII-1 Directional Gain=3.25 dBi, UNII-2A Directional Gain=3.25 dBi, UNII-2C Directional Gain=2.95 dBi, UNII-3 Directional Gain=2.95 dBi

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

- For TXBF: Directional Gain= $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.
Then, UNII-1 Directional Gain=5.66dBi, UNII-2A Directional Gain=5.66dBi,
UNII-2C Directional Gain=5.10dBi, UNII-3 Directional Gain=5.39dBi
- The antenna gain is provided by the manufacturer.

4. Table for Antenna Configuration:
For Non Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 8	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 9	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 10	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 11	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 12	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 13	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 15	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 16	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 21	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 22	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 26	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 27	TX AX(HE80) Mode Channel 106/122 (UNII-2C)

Pretest Mode	Description
Mode 28	TX A Mode Channel 149/157/165 (UNII-3)
Mode 29	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 30	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 31	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 32	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 33	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 34	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 35	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 36	TX AX(HE80) Mode Channel 155 (UNII-3)
Mode 37	TX AC(VHT40) Mode Channel 54 (UNII-2A)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 37	TX AC(VHT40) Mode Channel 54 (UNII-2A)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 37	TX AC(VHT40) Mode Channel 54 (UNII-2A)

Radiated Emissions Test - Above 1GHz_Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 8	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 9	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 10	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 15	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 16	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AX(HE80) Mode Channel 58 (UNII-2A)

Radiated Emissions Test - Above 1GHz_Non Beamforming	
Final Test Mode	Description
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 22	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 26	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 27	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 28	TX A Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 32	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 33	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 34	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 35	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 36	TX AX(HE80) Mode Channel 155 (UNII-3)

Maximun Output Power Test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 8	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 9	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 10	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 11	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 12	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 13	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 15	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 16	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AX(HE80) Mode Channel 58 (UNII-2A)

Maximun Output Power Test_Non Beamforming	
Final Test Mode	Description
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 21	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 22	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 26	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 27	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 28	TX A Mode Channel 149/157/165 (UNII-3)
Mode 29	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 30	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 31	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 32	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 33	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 34	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 35	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 36	TX AX(HE80) Mode Channel 155 (UNII-3)

Maximun Output Power Test_Beamforming	
Final Test Mode	Description
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 8	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 9	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 11	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 12	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 13	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 15	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 16	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AX(HE80) Mode Channel 58 (UNII-2A)

Maximun Output Power Test_Beamforming	
Final Test Mode	Description
Mode 20	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 21	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 22	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 26	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 27	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 29	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 30	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 31	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 32	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 33	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 34	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 35	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 36	TX AX(HE80) Mode Channel 155 (UNII-3)

Other Conducted Test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 8	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 9	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 10	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 15	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 16	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AX(HE80) Mode Channel 58 (UNII-2A)

Other Conducted Test_Non Beamforming	
Final Test Mode	Description
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 22	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 25	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 26	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 27	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 28	TX A Mode Channel 149/157/165 (UNII-3)
Mode 31	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 32	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 33	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 34	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 35	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 36	TX AX(HE80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT40) Mode Channel 54 (UNII-2A) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11ac(VHT20) mode, IEEE 802.11ac(VHT40) mode, IEEE 802.11ac(VHT80) mode, IEEE 802.11ax(HE20) mode, IEEE 802.11ax(HE40) mode and IEEE 802.11ax(HE80) mode, only the worst cases are documented for other test items.
- (5) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (6) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

2.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	N/A		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	77	77	76
IEEE 802.11n(HT20)	77	77	76
IEEE 802.11ac(VHT20)	78	78	77
IEEE 802.11ax(HE20)	78	78	78
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	79	84	
IEEE 802.11ac(VHT40)	79	84	
IEEE 802.11ax(HE40)	78	83	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	78		
IEEE 802.11ax(HE80)	76		

UNII-2A			
Test Software Version	N/A		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	77	77	76
IEEE 802.11n(HT20)	77	77	76
IEEE 802.11ac(VHT20)	78	78	76
IEEE 802.11ax(HE20)	78	78	77
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	82	72	
IEEE 802.11ac(VHT40)	82	72	
IEEE 802.11ax(HE40)	82	70	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	69		
IEEE 802.11ax(HE80)	68		

UNII-2C			
Test Software Version	N/A		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	76	77	77
IEEE 802.11n(HT20)	76	78	78
IEEE 802.11ac(VHT20)	77	79	79
IEEE 802.11ax(HE20)	79	79	79
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	75	83	83
IEEE 802.11ac(VHT40)	73	84	84
IEEE 802.11ax(HE40)	73	83	80
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	72	84	
IEEE 802.11ax(HE80)	72	85	

UNII-3			
Test Software Version	N/A		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	86	86	86
IEEE 802.11n(HT20)	86	86	86
IEEE 802.11ac(VHT20)	86	86	86
IEEE 802.11ax(HE20)	86	86	86
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	87	87	
IEEE 802.11ac(VHT40)	87	87	
IEEE 802.11ax(HE40)	88	88	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	80		
IEEE 802.11ax(HE80)	80		

Beamforming

UNII-1			
Test Software Version	N/A		
Frequency (MHz)	5180	5200	5240
IEEE 802.11n(HT20)	76	76	75
IEEE 802.11ac(VHT20)	77	77	76
IEEE 802.11ax(HE20)	77	77	77
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	78	83	
IEEE 802.11ac(VHT40)	78	83	
IEEE 802.11ax(HE40)	77	82	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	77		
IEEE 802.11ax(HE80)	75		

UNII-2A			
Test Software Version	N/A		
Frequency (MHz)	5260	5300	5320
IEEE 802.11n(HT20)	76	76	75
IEEE 802.11ac(VHT20)	77	77	75
IEEE 802.11ax(HE20)	77	77	76
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	81	71	
IEEE 802.11ac(VHT40)	81	71	
IEEE 802.11ax(HE40)	81	69	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	68		
IEEE 802.11ax(HE80)	67		

UNII-2C			
Test Software Version	N/A		
Frequency (MHz)	5500	5580	5700
IEEE 802.11n(HT20)	75	77	77
IEEE 802.11ac(VHT20)	76	78	78
IEEE 802.11ax(HE20)	78	78	78
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	74	82	82
IEEE 802.11ac(VHT40)	72	83	83
IEEE 802.11ax(HE40)	72	82	79
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	71	83	
IEEE 802.11ax(HE80)	71	84	

UNII-3			
Test Software Version	N/A		
Frequency (MHz)	5745	5785	5825
IEEE 802.11n(HT20)	85	85	85
IEEE 802.11ac(VHT20)	85	85	85
IEEE 802.11ax(HE20)	85	85	85
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	86	86	
IEEE 802.11ac(VHT40)	86	86	
IEEE 802.11ax(HE40)	87	87	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	79		
IEEE 802.11ax(HE80)	79		

2.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

IEEE 802.11a

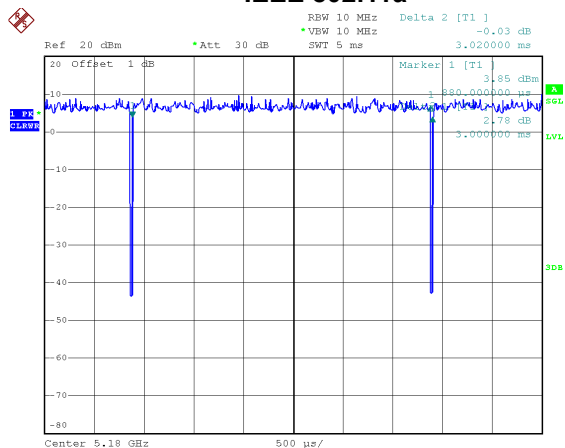


Date: 25.APR.2021 13:47:46

Duty cycle = 5 ms / 5 ms = 100%

Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$

IEEE 802.11n(HT20)

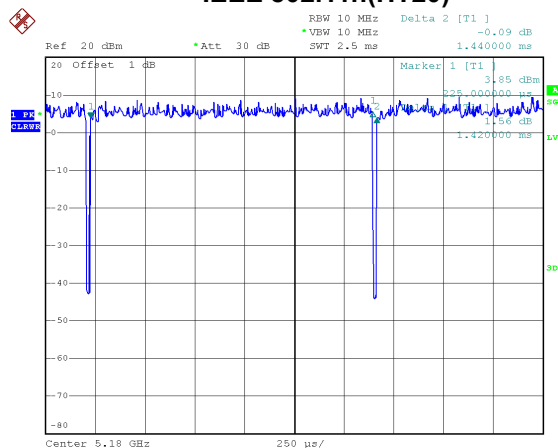


Date: 25.APR.2021 13:48:37

Duty cycle = 1.420 ms / 1.440 ms = 98.61%

Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$

IEEE 802.11n(HT40)

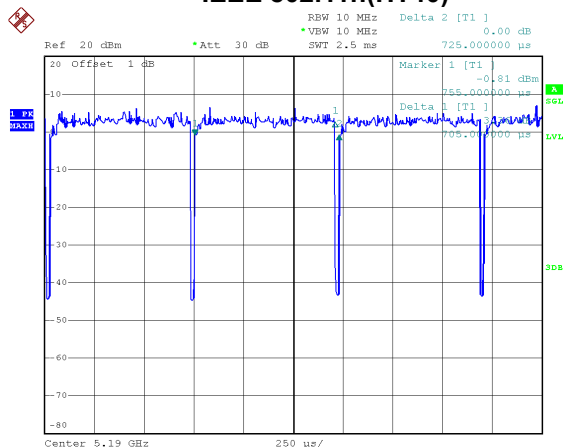


Date: 25.APR.2021 13:50:49

Duty cycle = 0.705 ms / 0.725 ms = 97.24%

Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.12$

IEEE 802.11ac(VHT20)

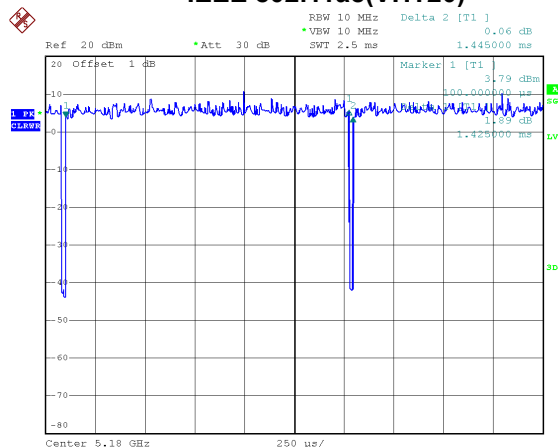


Date: 25.APR.2021 13:49:12

Duty cycle = 1.425 ms / 1.445 ms = 98.62%

Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$


IEEE 802.11ac(VHT40)

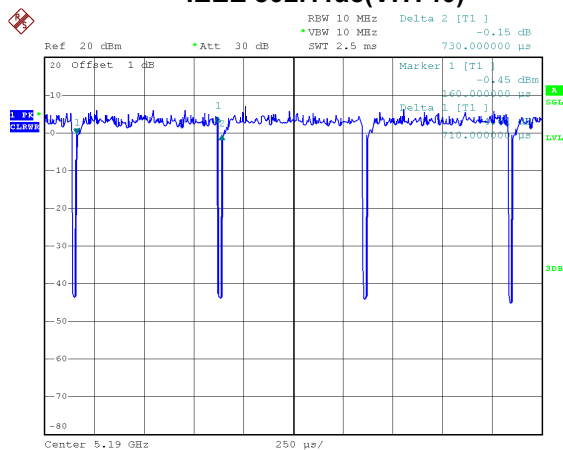

Date: 25.APR.2021 13:51:27

Duty cycle = 0.710 ms / 0.730 ms = 97.26%
Duty Factor = 10 log(1 / Duty cycle) = 0.12


IEEE 802.11ac(VHT80)

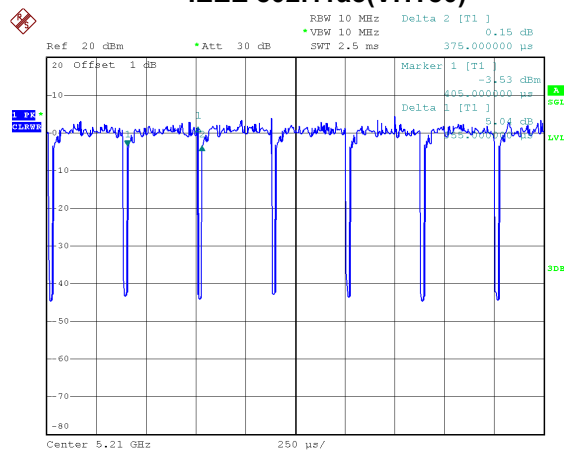

Date: 25.APR.2021 13:52:31

Duty cycle = 0.355 ms / 0.375 ms = 94.67%
Duty Factor = 10 log(1 / Duty cycle) = 0.24


IEEE 802.11ax(HE20)

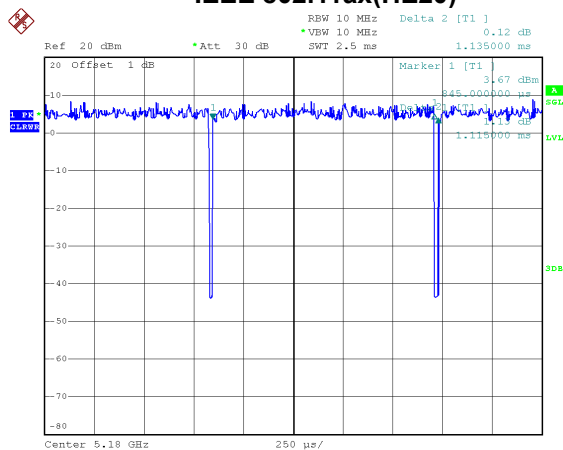

Date: 25.APR.2021 13:49:50


Duty cycle = 1.115 ms / 1.135 ms = 98.24%
Duty Factor = 10 log(1 / Duty cycle) = 0.00

IEEE 802.11ax(HE40)

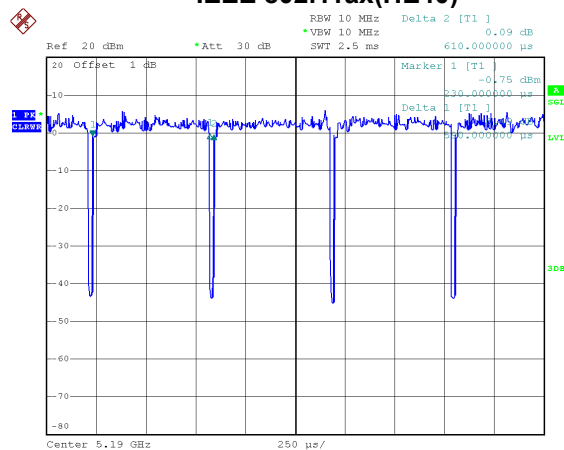

Date: 25.APR.2021 13:51:56

Duty cycle = 0.590 ms / 0.610 ms = 96.72%
Duty Factor = 10 log(1 / Duty cycle) = 0.14

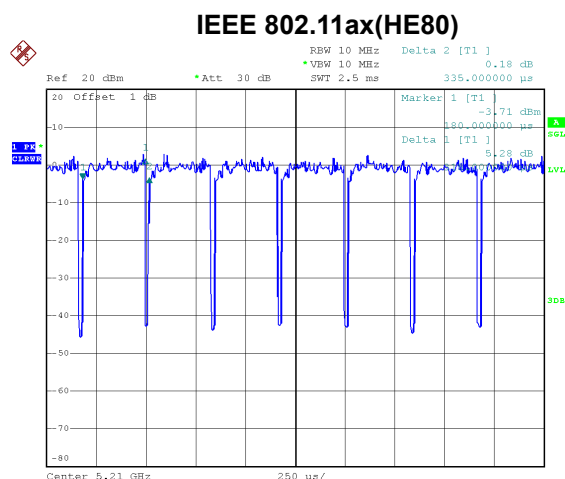

Date: 25.APR.2021 13:53:02

Duty cycle = $0.315 \text{ ms} / 0.335 \text{ ms} = 94.03\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.27$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $\geq 98\%$).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $\geq 98\%$).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1418 Hz (Duty cycle $< 98\%$).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $\geq 98\%$).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1408 Hz (Duty cycle $< 98\%$).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2817 Hz (Duty cycle $< 98\%$).

≥For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $\geq 98\%$).


For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1695 Hz (Duty cycle $< 98\%$).

For IEEE 802.11ax(HE80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3175 Hz (Duty cycle $< 98\%$).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

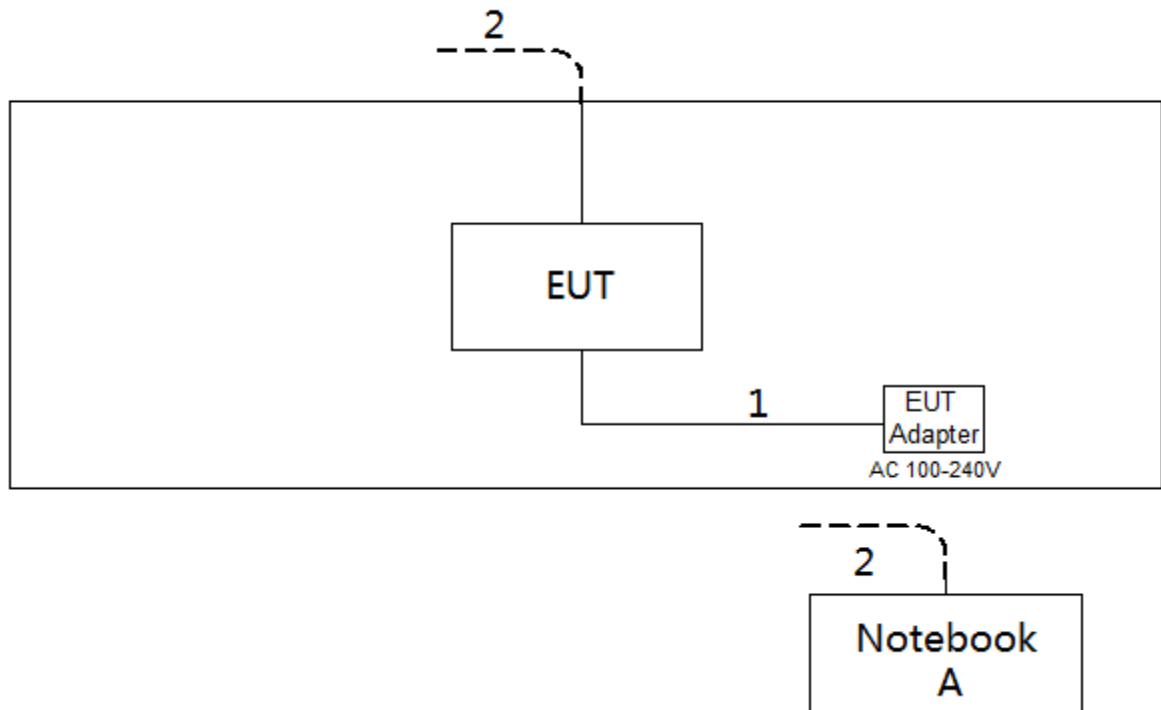

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

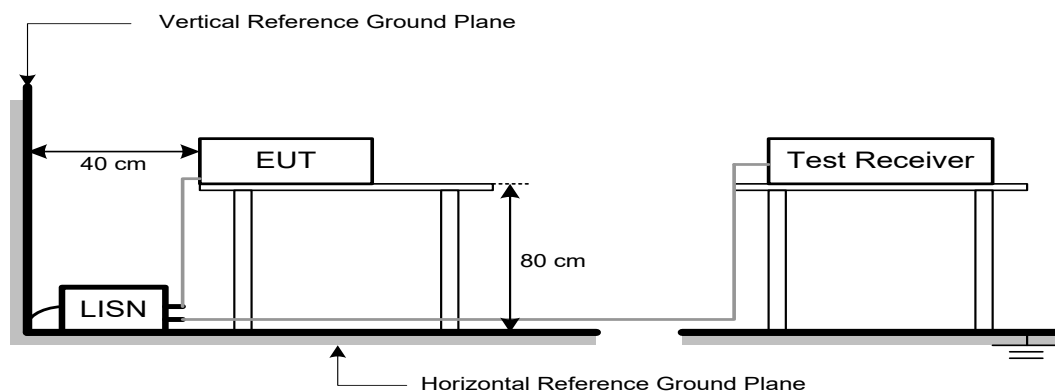

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850 NOTE (2)	-27	68.2
	10	105.2
	15.6	110.8
	27	122.2

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

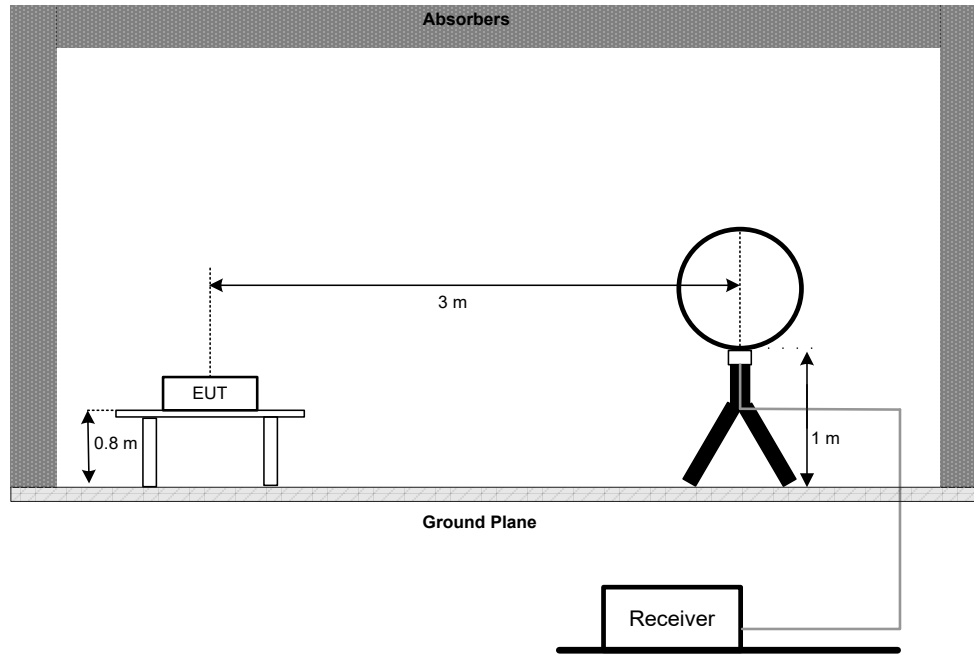

30 MHz to 1 GHz

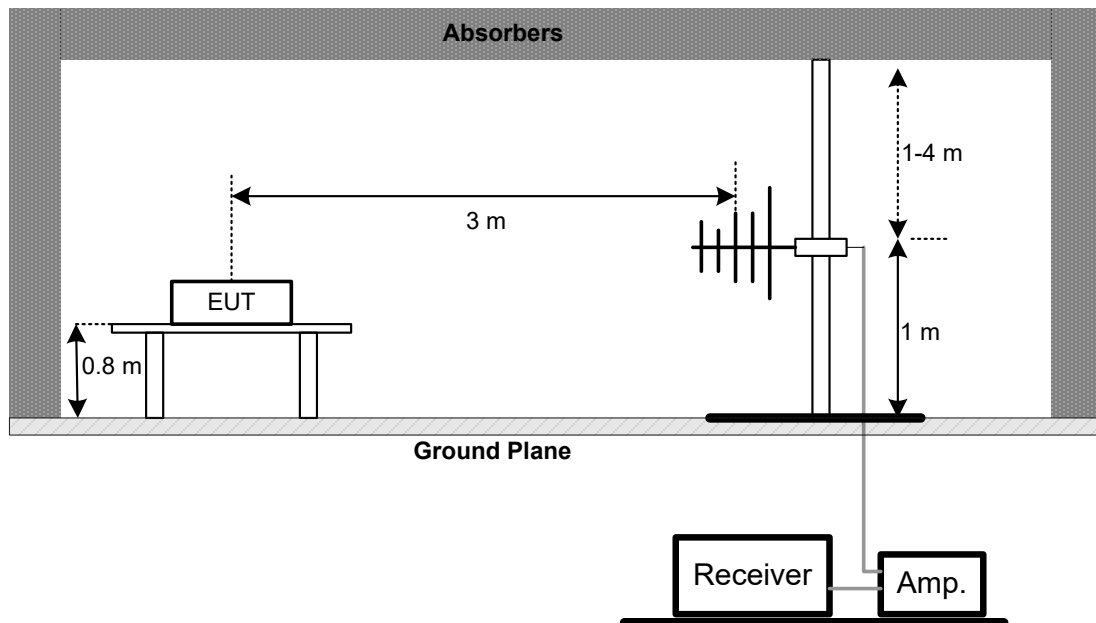

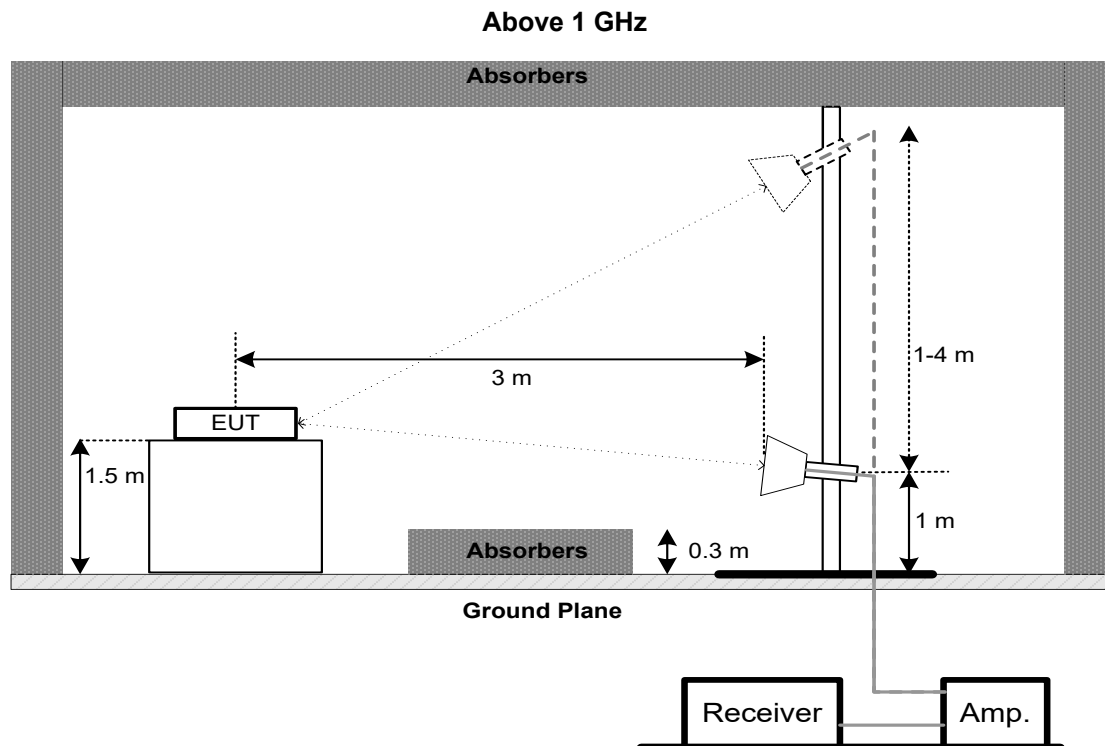

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

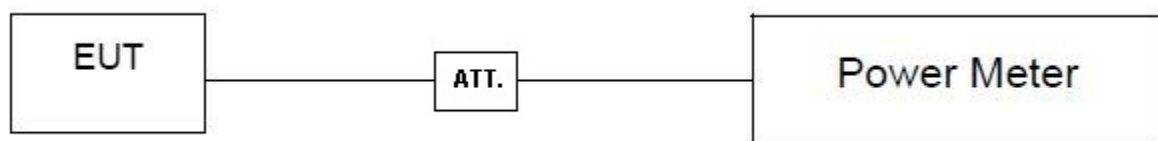

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 13 dB, and the final offset is $13 + 7 = 20 \text{ dB}$ when RBW=100kHz is used.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. FREQUENCY STABILITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 5°C~45°C.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

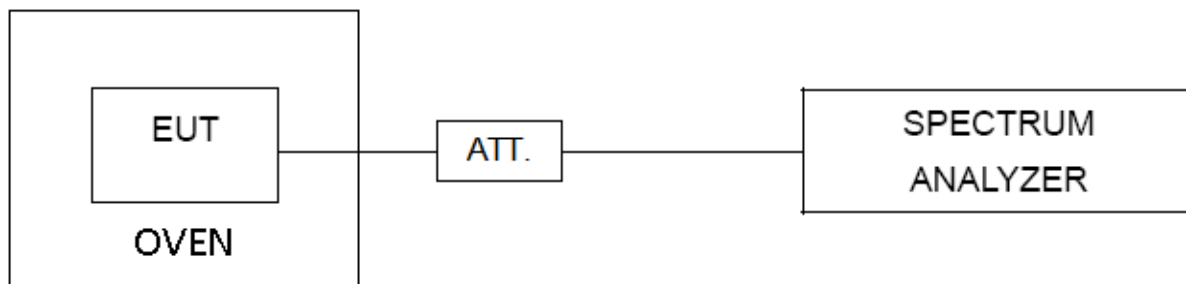

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Apr. 28, 2022
2	Cable	N/A	RG 213/U	N/A	May 27, 2022
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 27, 2022
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 15, 2022
2	Amplifier	HP	8447D	2944A08742	Feb. 28, 2022
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 20, 2022
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2022
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6 000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Band Reject Filter	Micro-Tronics	BRC50705-01	10	Feb. 27, 2022
11	Band Reject Filter	Micro-Tronics	BRC50704-01	8	Feb. 27, 2022
12	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 27, 2022
13	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
3	RF Cable	Tongkaichuan	N/A	N/A	N/A
4	DC Block	Mini	N/A	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A

Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	Precision Oven Tester	CEPREI	CEEC-M64T-40	15-008	Feb. 27, 2022
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A
5	DC Block	Mini	N/A	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Phase	Line
-----------	--	-------	------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.150	44.55	9.67	54.22	66.00	-11.78	peak	
2		0.150	22.30	9.67	31.97	56.00	-24.03	AVG	
3		0.181	40.49	9.85	50.34	64.42	-14.08	peak	
4		0.222	36.18	9.89	46.07	62.74	-16.67	peak	
5	*	0.443	41.03	9.93	50.96	57.01	-6.05	peak	
6		0.443	31.00	9.93	40.93	47.01	-6.08	AVG	
7		1.153	29.01	10.02	39.03	56.00	-16.97	peak	
8		3.421	30.87	10.21	41.08	56.00	-14.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Phase	Neutral
-----------	--	-------	---------




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.154	41.11	9.77	50.88	65.75	-14.87	peak	
2		0.191	37.74	9.98	47.72	64.01	-16.29	peak	
3	*	0.438	40.49	10.11	50.60	57.10	-6.50	peak	
4		0.438	30.30	10.11	40.41	47.10	-6.69	AVG	
5		0.613	29.44	10.18	39.62	56.00	-16.38	peak	
6		1.603	28.13	10.37	38.50	56.00	-17.50	peak	
7		3.575	30.45	10.56	41.01	56.00	-14.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Ant 0°
-----------	--	--------------	--------

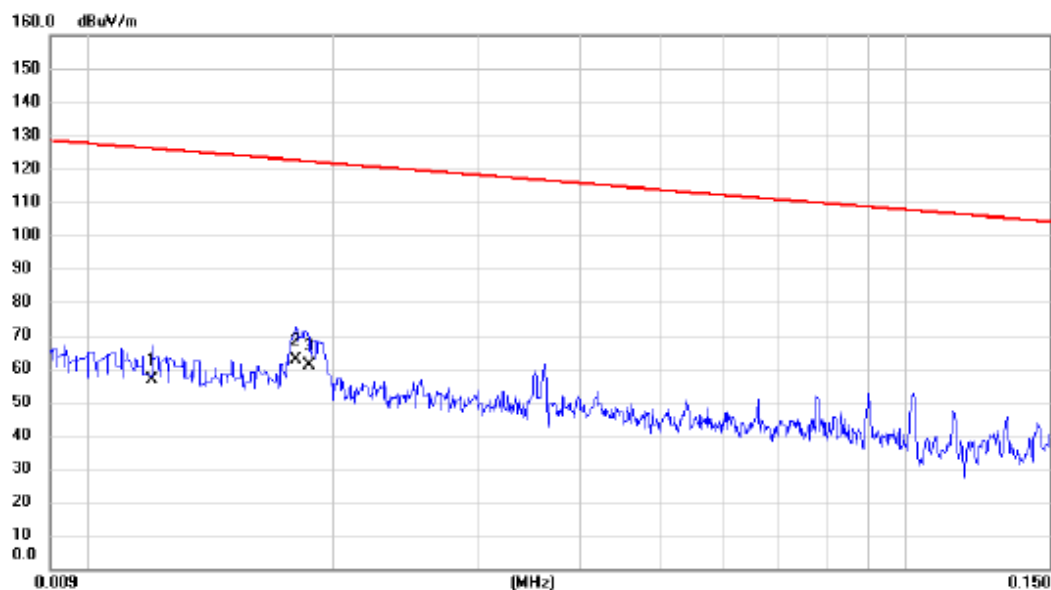


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.012	39.65	16.93	56.58	126.02	-69.44	AVG	
2	*	0.018	47.54	15.04	62.58	122.50	-59.92	AVG	
3		0.019	46.25	14.82	61.07	122.17	-61.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Ant 0°
-----------	--	--------------	--------

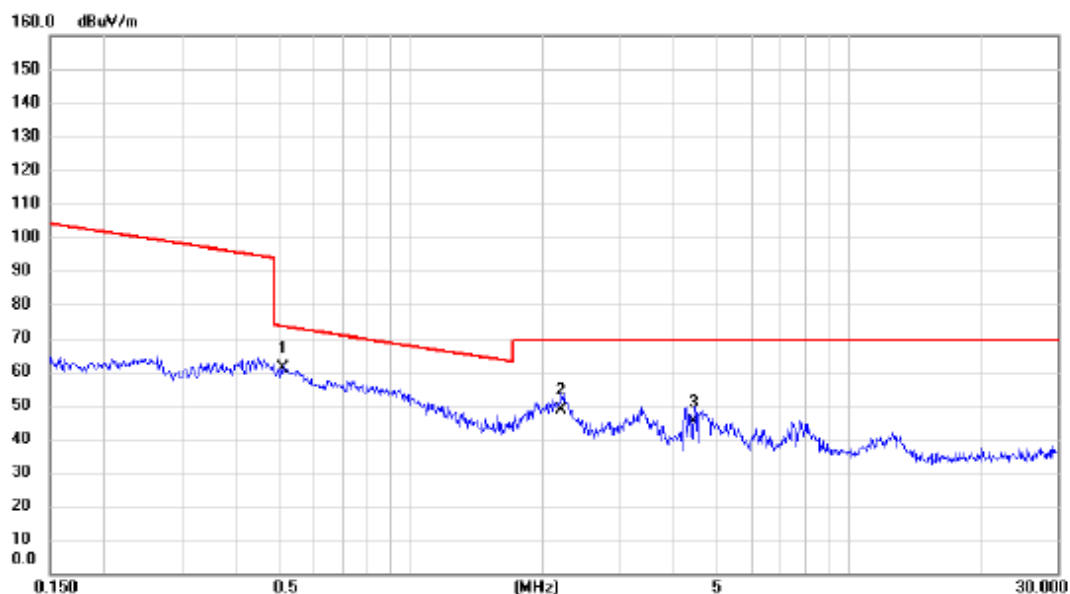


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.510	47.52	13.56	61.08	73.45	-12.37	QP	
2		2.213	36.54	12.18	48.72	69.54	-20.82	QP	
3		4.454	32.87	12.06	44.93	69.54	-24.61	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Ant 90°
-----------	--	--------------	---------

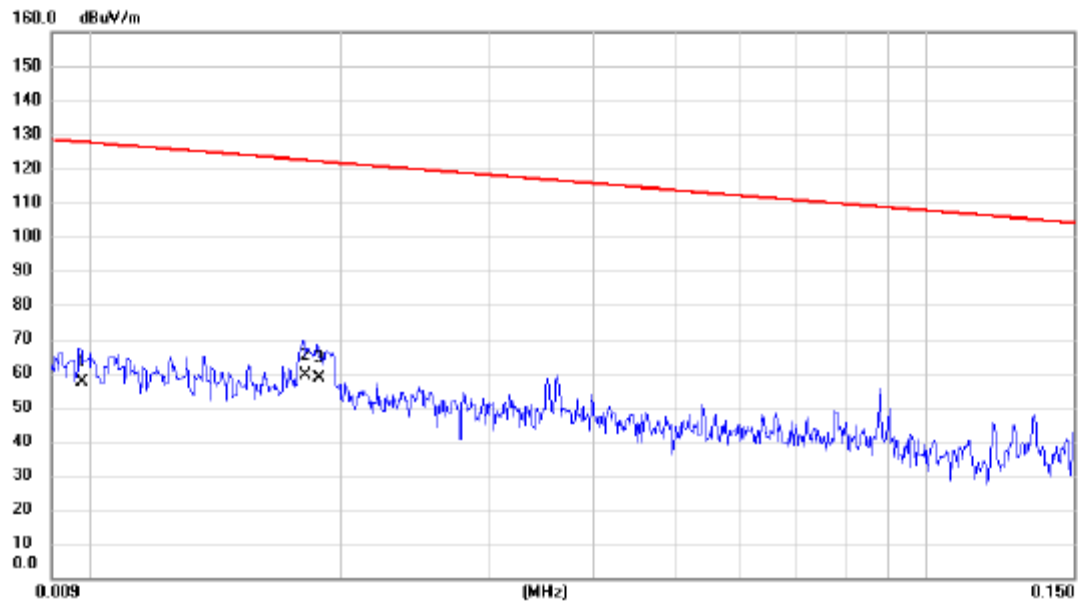


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.010	39.65	17.62	57.27	127.78	-70.51	AVG	
2	*	0.018	44.54	15.01	59.55	122.45	-62.90	AVG	
3		0.019	43.62	14.79	58.41	122.12	-63.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Ant 90°
-----------	--	--------------	---------

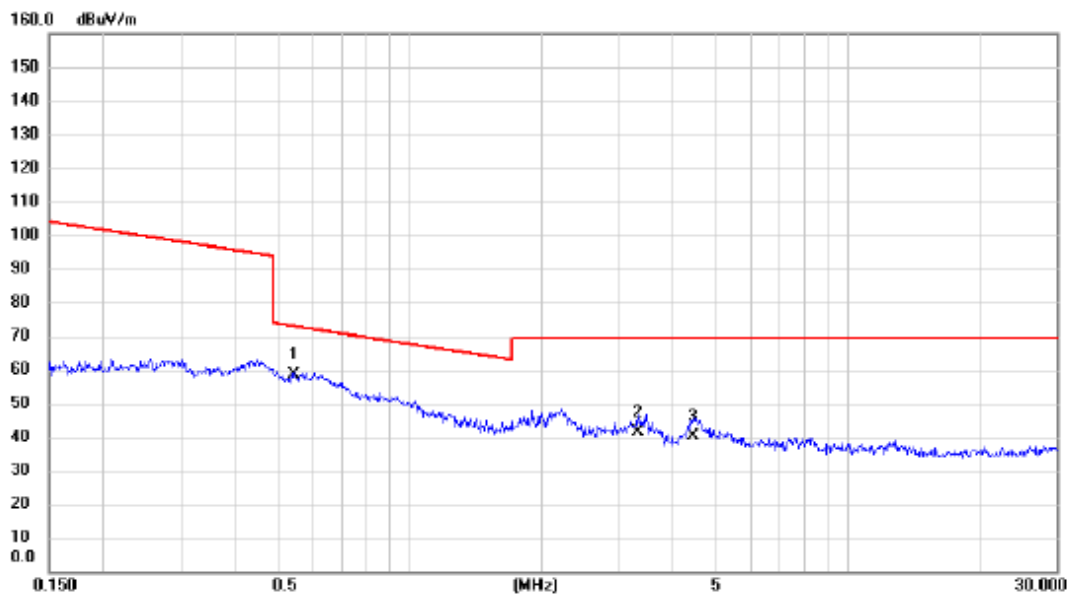


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.543	45.01	13.52	58.53	72.90	-14.37	QP	
2		3.328	29.54	11.98	41.52	69.54	-28.02	QP	
3		4.431	28.22	12.07	40.29	69.54	-29.25	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Vertical
-----------	--	--------------	----------

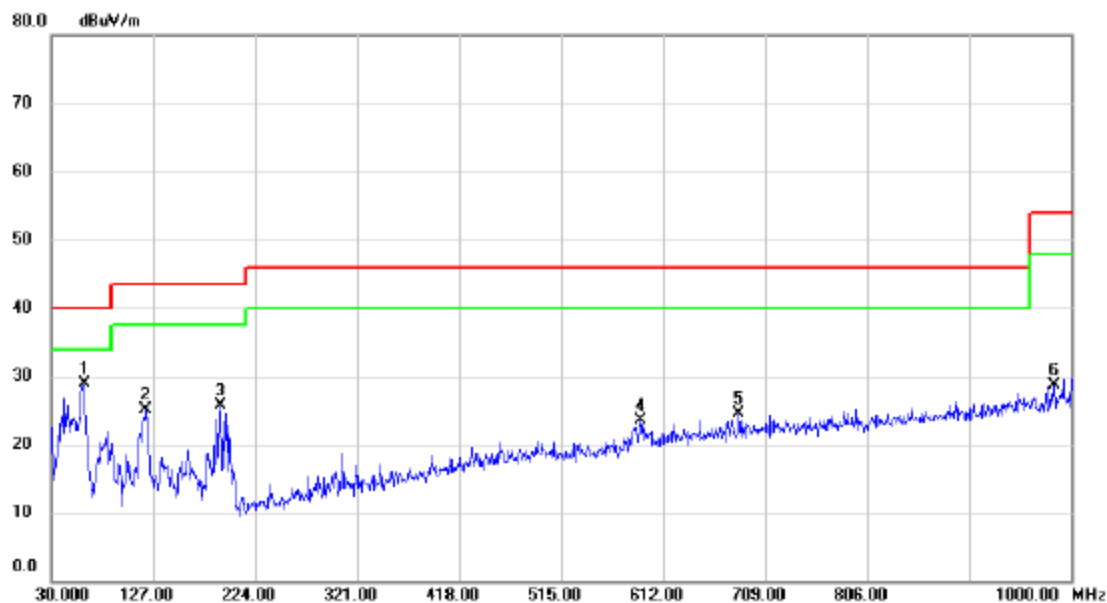


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	61.040	43.53	-14.58	28.95	40.00	-11.05	peak	
2	120.210	37.82	-12.74	25.08	43.50	-18.42	peak	
3	191.020	39.86	-14.16	25.70	43.50	-17.80	peak	
4	590.660	29.05	-5.62	23.43	46.00	-22.57	peak	
5	683.780	28.34	-3.80	24.54	46.00	-21.46	peak	
6	983.510	27.94	0.80	28.74	54.00	-25.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 54 (UNII-2A)	Polarization	Horizontal
-----------	--	--------------	------------

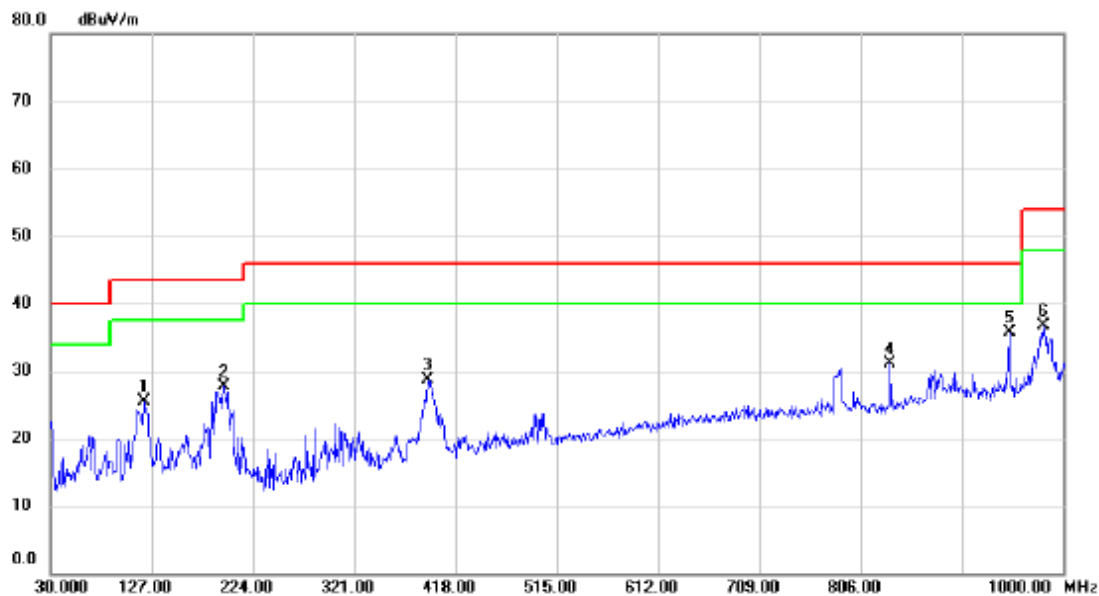

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	119.240	38.36	-12.85	25.51	43.50	-17.99	peak	
2	195.870	42.19	-14.52	27.67	43.50	-15.83	peak	
3	390.840	37.96	-9.22	28.74	46.00	-17.26	peak	
4	834.130	33.08	-1.99	31.09	46.00	-14.91	peak	
5 *	948.590	35.58	0.09	35.67	46.00	-10.33	peak	
6	981.570	35.95	0.75	36.70	54.00	-17.30	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

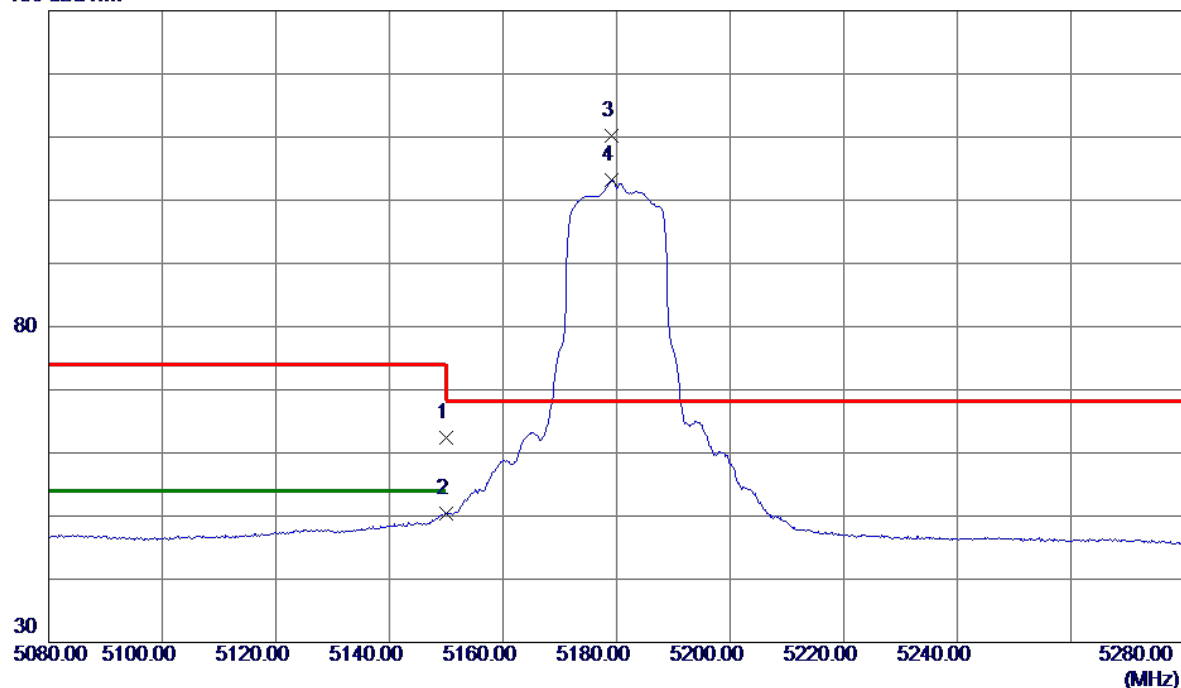


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.03	16.28	62.31	74.00	-11.69	Peak	
2	5150.0000	34.15	16.28	50.43	54.00	-3.57	AVG	
3 *	5179.2000	93.92	16.32	110.24	68.20	42.04	Peak	No Limit
4	5179.2000	86.94	16.32	103.26	999.00	-895.74	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

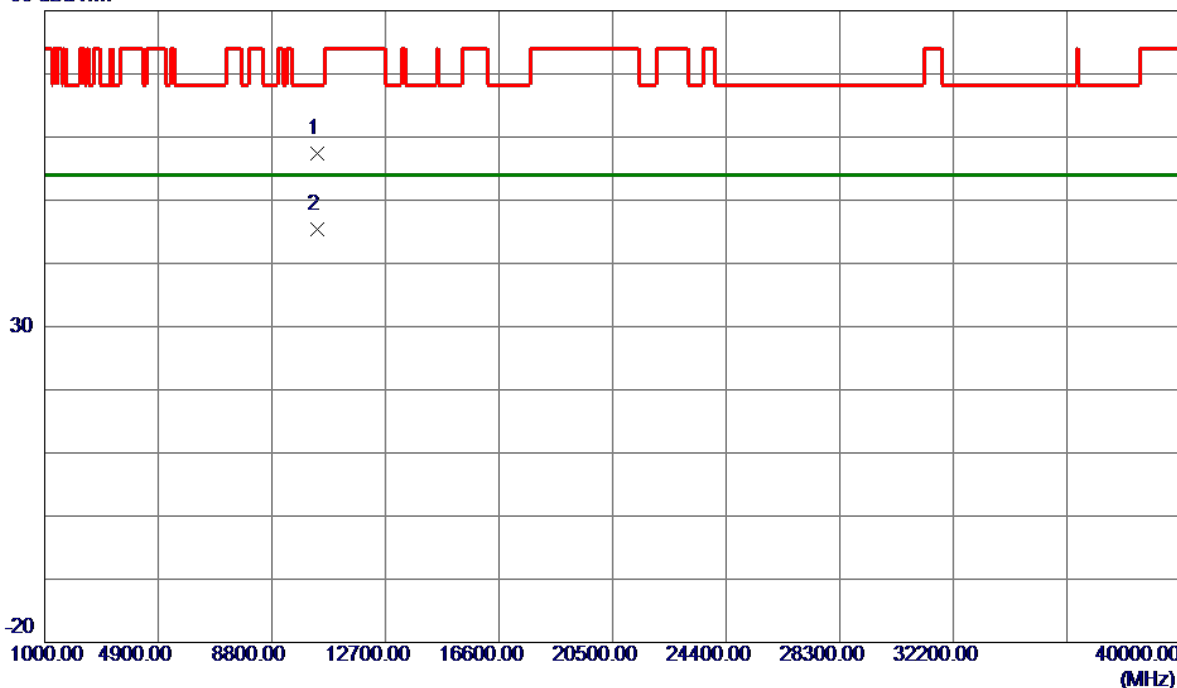


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10359.3000	43.98	13.46	57.44	68.20	-10.76	Peak	
2 *	10359.8500	32.00	13.46	45.46	54.00	-8.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

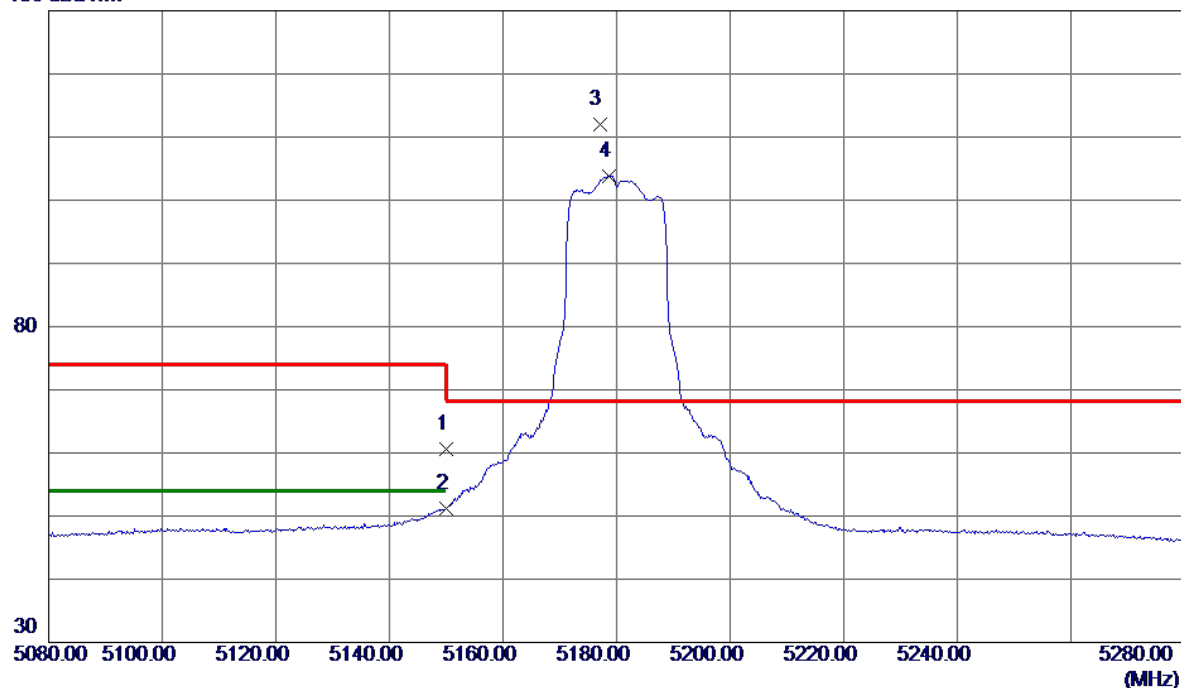


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.37	16.28	60.65	74.00	-13.35	Peak	
2	5150.0000	34.98	16.28	51.26	54.00	-2.74	AVG	
3 *	5177.0000	95.61	16.31	111.92	68.20	43.72	Peak	No Limit
4	5178.6000	87.57	16.31	103.88	999.00	-895.12	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

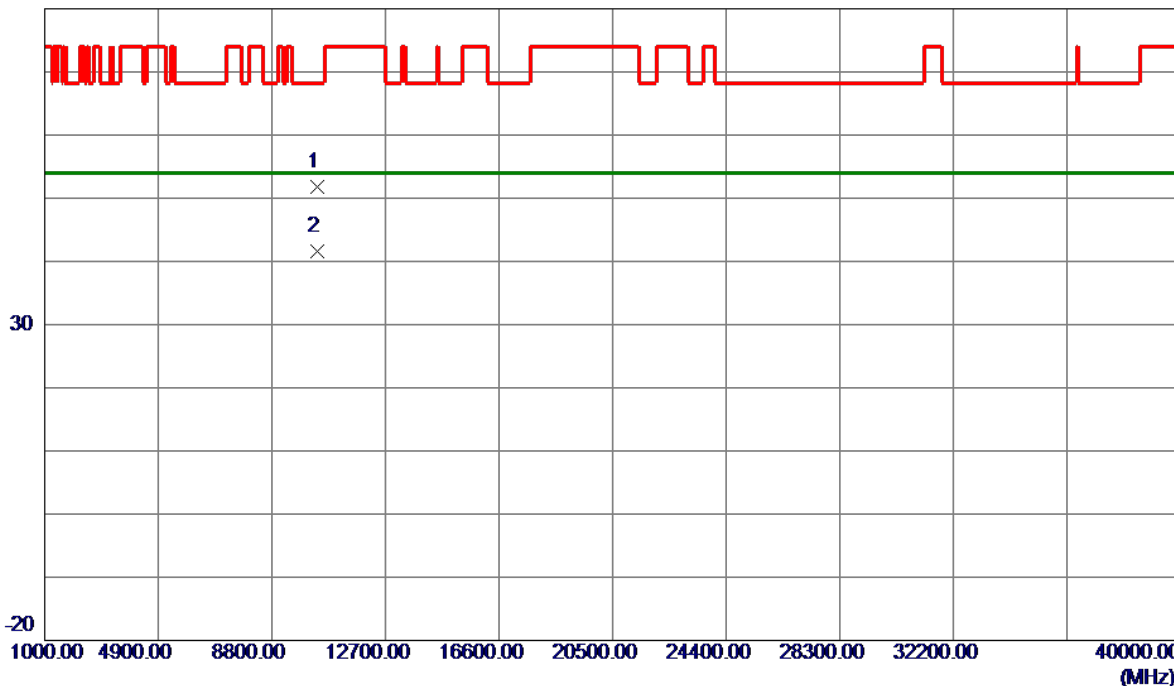


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10354.2500	38.38	13.45	51.83	68.20	-16.37	Peak	
2 *	10355.4500	28.21	13.46	41.67	54.00	-12.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

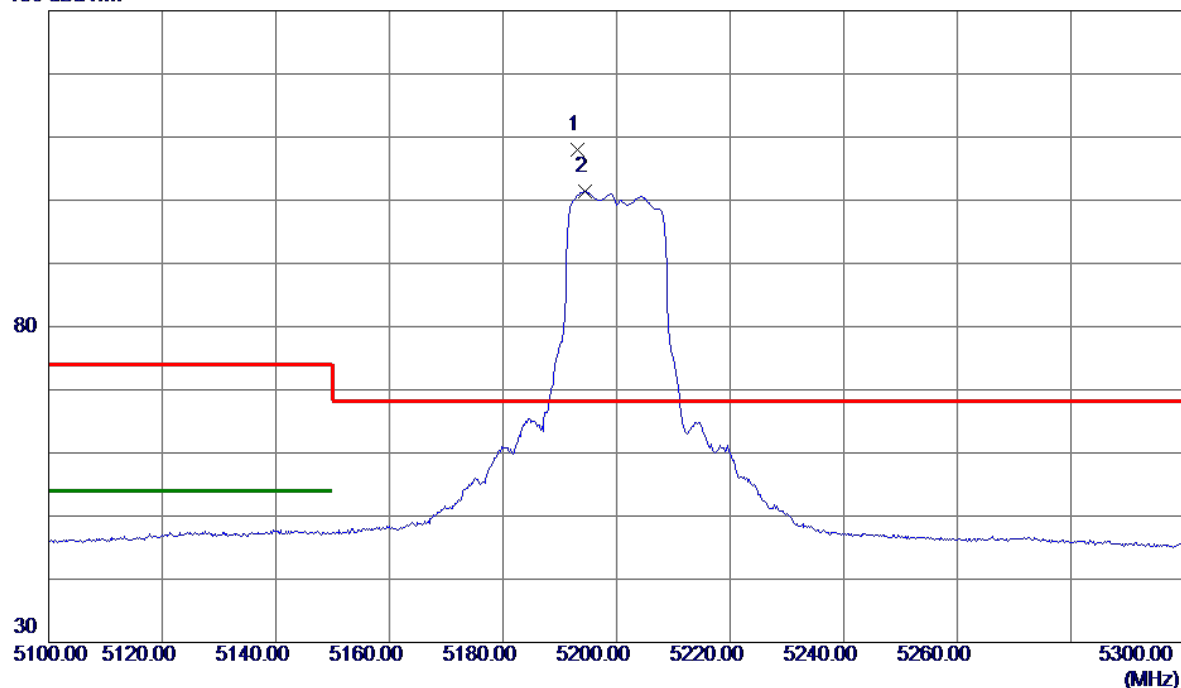


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5193.2000	91.77	16.33	108.10	68.20	39.90	Peak	No Limit
2	5194.4000	85.02	16.33	101.35	999.00	-897.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

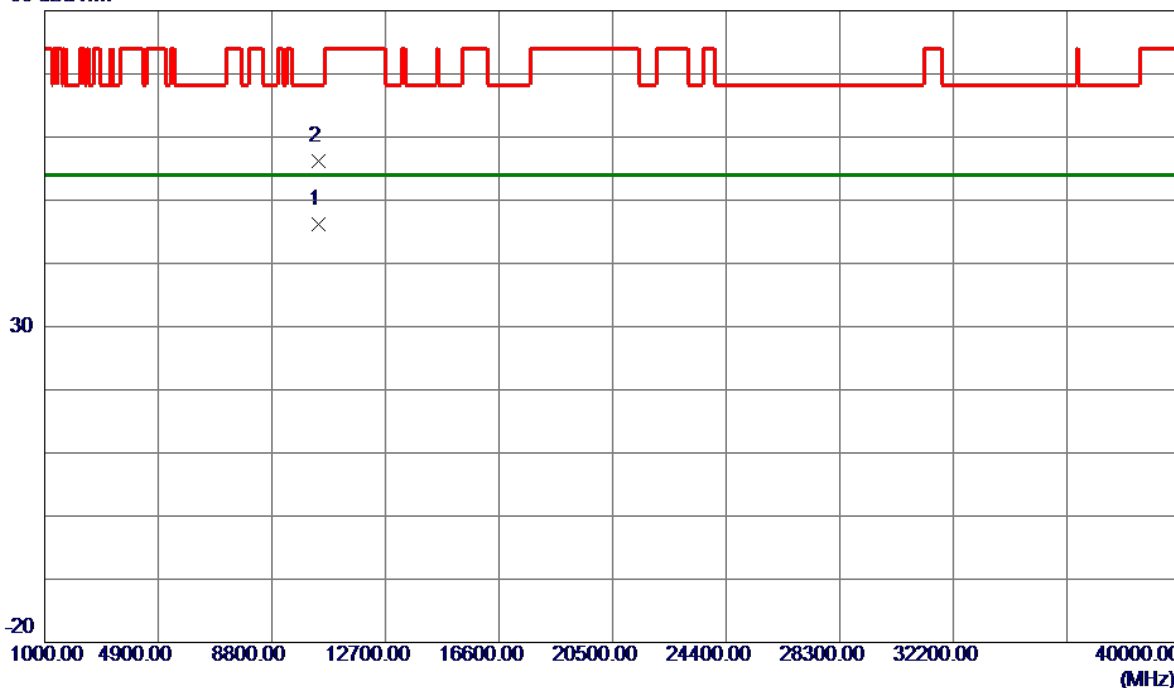


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.3000	32.65	13.49	46.14	54.00	-7.86	AVG	
2	10399.9000	42.78	13.49	56.27	68.20	-11.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

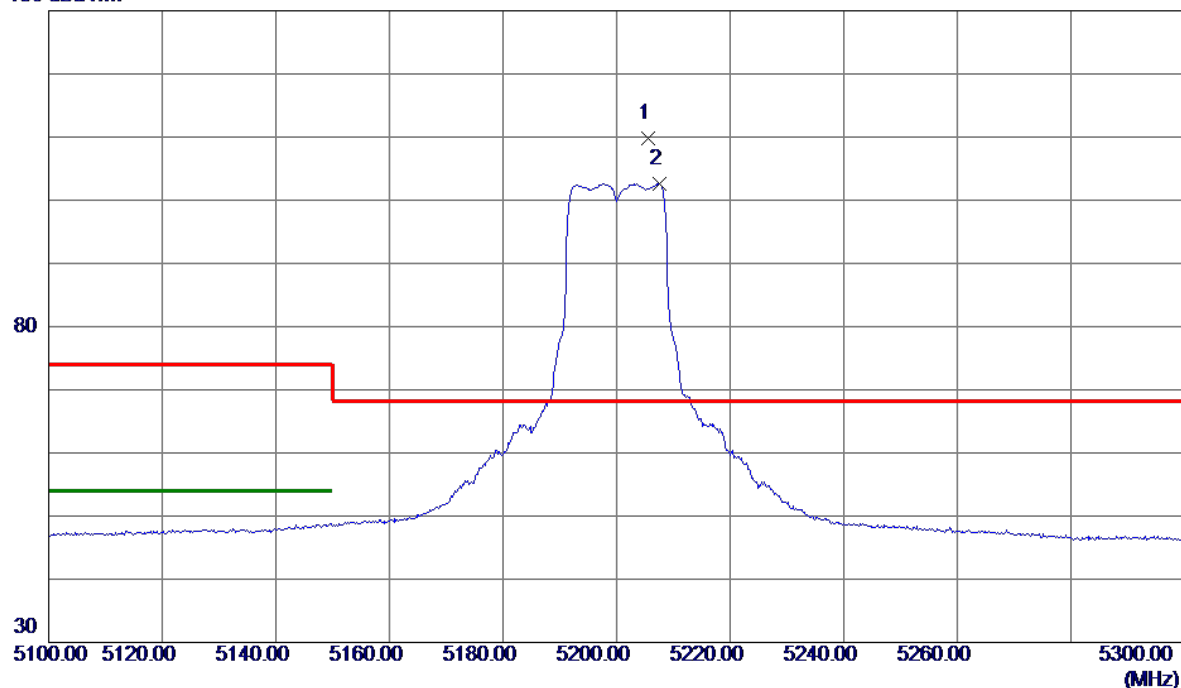


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5205.6000	93.37	16.34	109.71	68.20	41.51	Peak	No Limit
2	5207.6000	86.34	16.35	102.69	999.00	-896.31	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

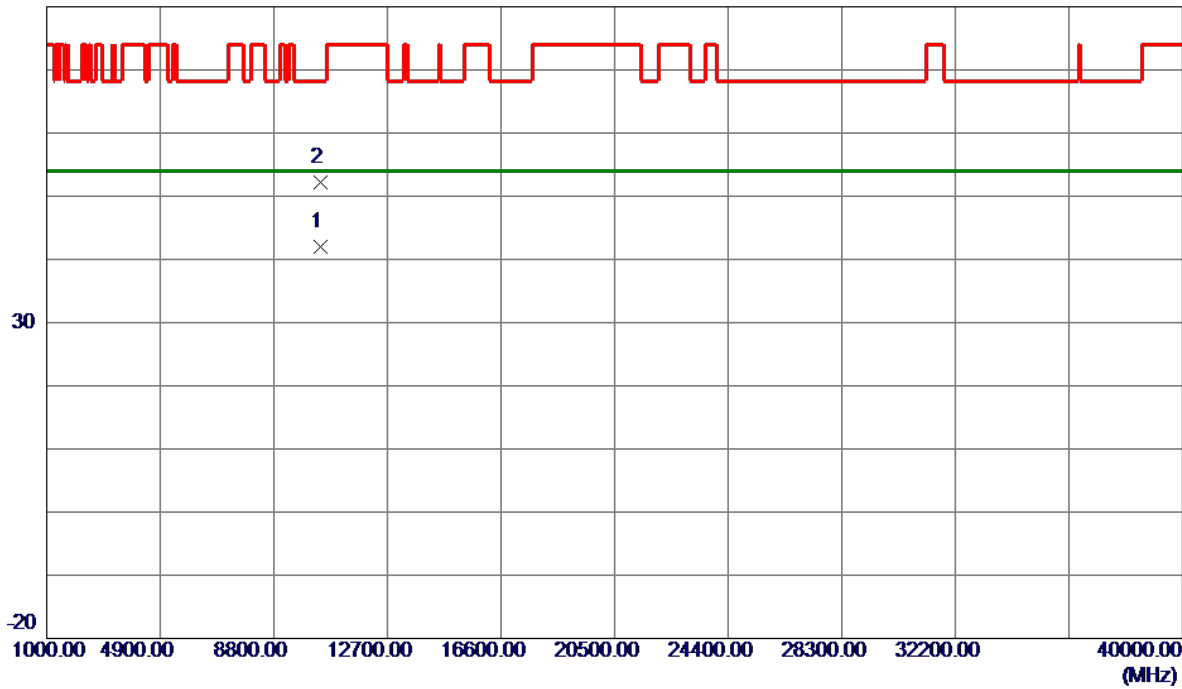


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.7000	28.43	13.49	41.92	54.00	-12.08	AVG	
2	10400.3000	38.71	13.49	52.20	68.20	-16.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

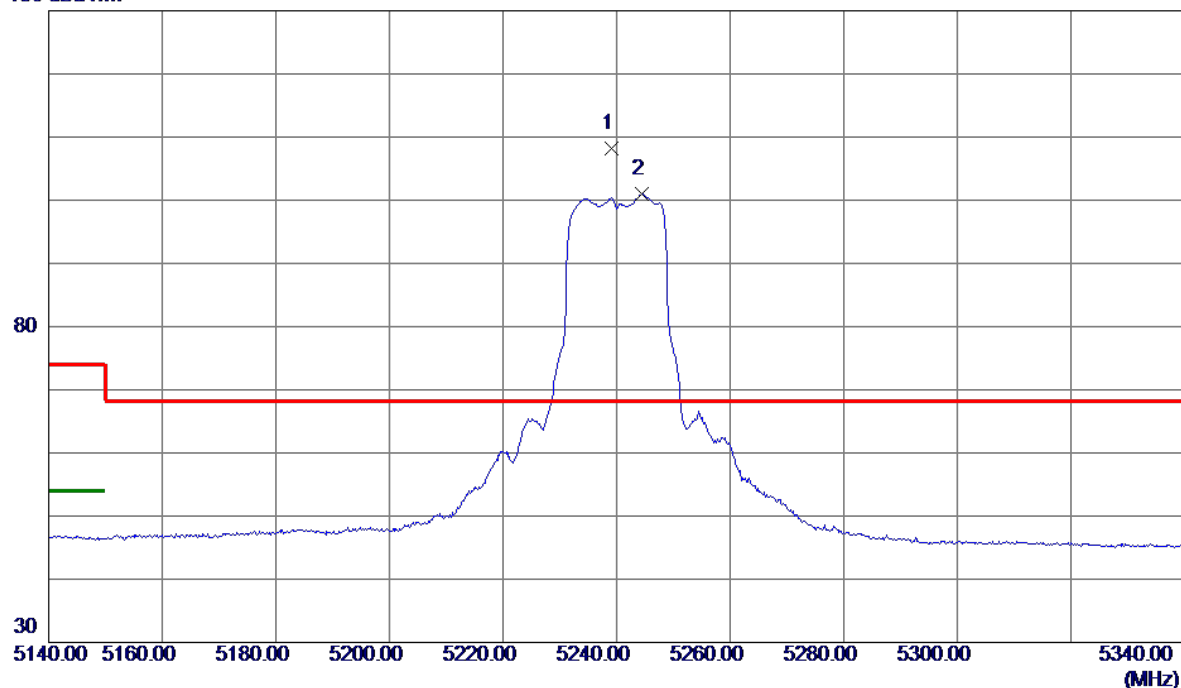


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5239.2000	91.79	16.38	108.17	68.20	39.97	Peak	No Limit
2	5244.4000	84.56	16.39	100.95	999.00	-898.05	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

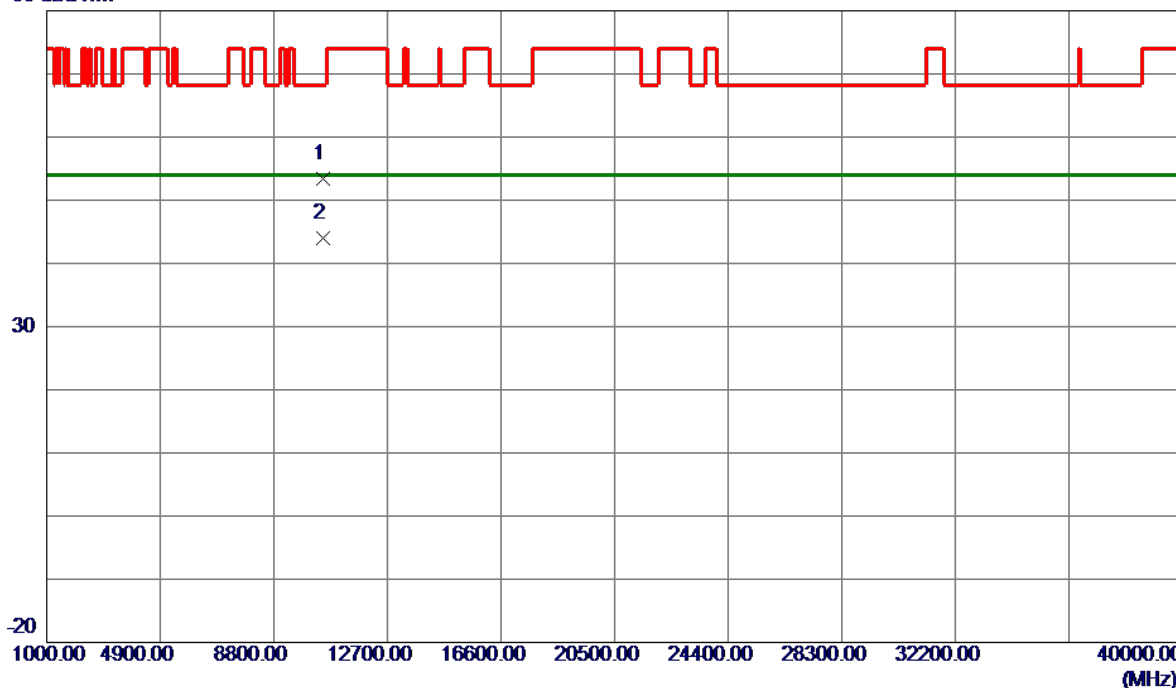


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10478.9500	39.92	13.56	53.48	68.20	-14.72	Peak	
2 *	10479.5500	30.46	13.56	44.02	54.00	-9.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

130 dBuV/m

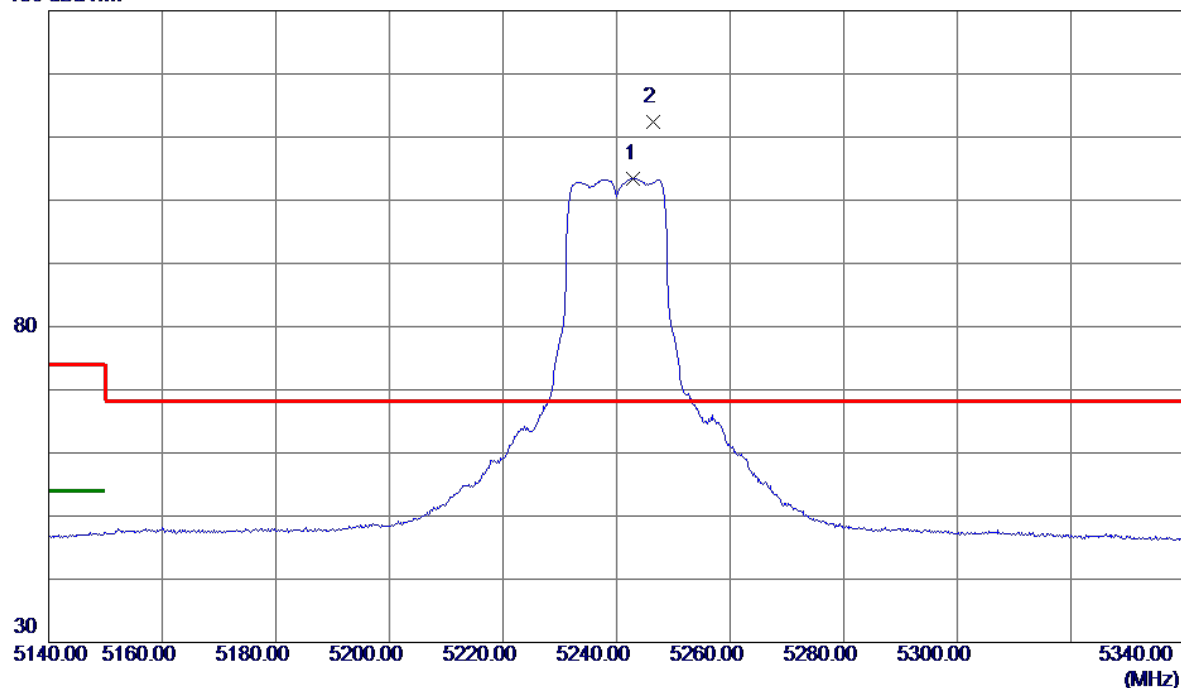


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5243.0000	87.02	16.38	103.40	999.00	-895.60	AVG	No Limit
2 *	5246.4000	95.97	16.39	112.36	68.20	44.16	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

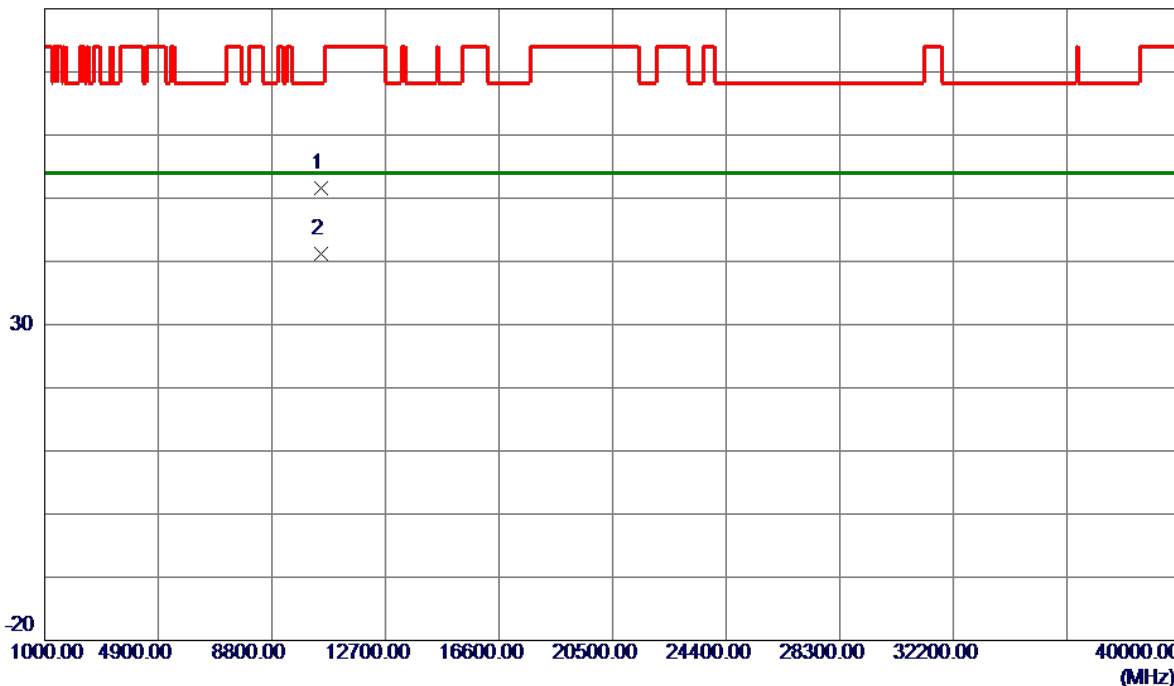


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10475.5000	38.11	13.55	51.66	68.20	-16.54	Peak	
2 *	10480.0000	27.67	13.56	41.23	54.00	-12.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

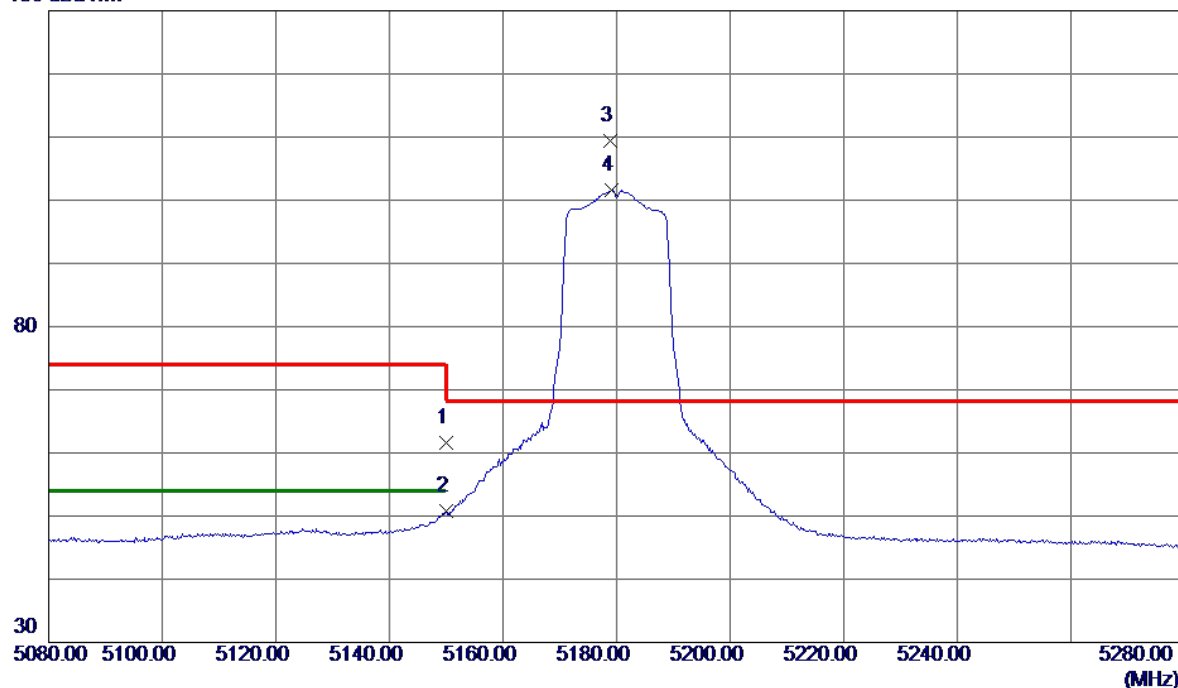


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.33	16.28	61.61	74.00	-12.39	Peak	
2	5150.0000	34.50	16.28	50.78	54.00	-3.22	AVG	
3 *	5178.8000	93.13	16.31	109.44	68.20	41.24	Peak	No Limit
4	5179.2000	85.30	16.32	101.62	999.00	-897.38	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

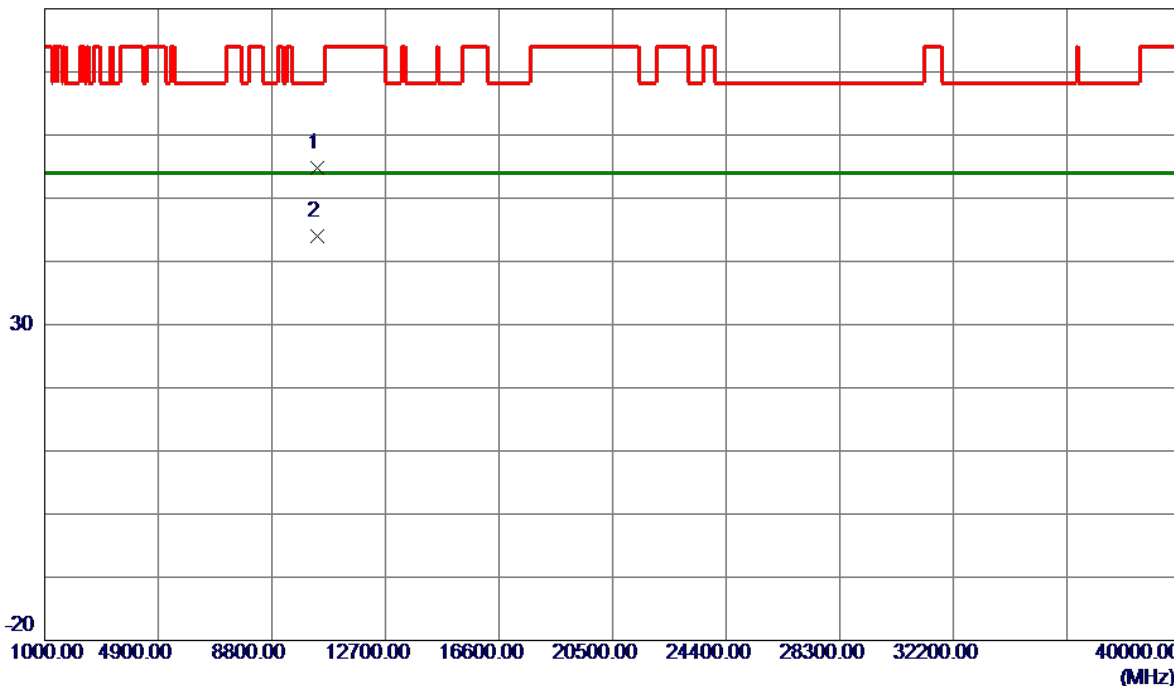


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10359.0199	41.34	13.46	54.80	68.20	-13.40	Peak	
2 *	10359.5599	30.52	13.46	43.98	54.00	-10.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

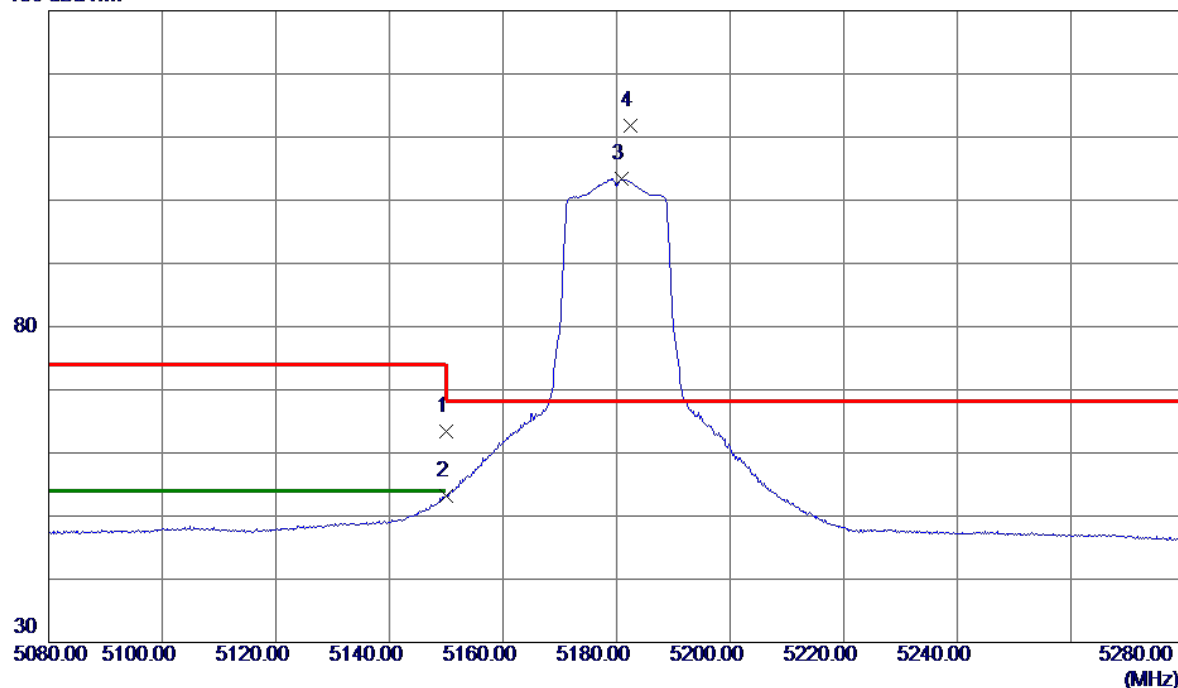


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.08	16.28	63.36	74.00	-10.64	Peak	
2	5150.0000	36.90	16.28	53.18	54.00	-0.82	AVG	
3	5180.8000	87.11	16.32	103.43	999.00	-895.57	AVG	No Limit
4 *	5182.4000	95.40	16.32	111.72	68.20	43.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

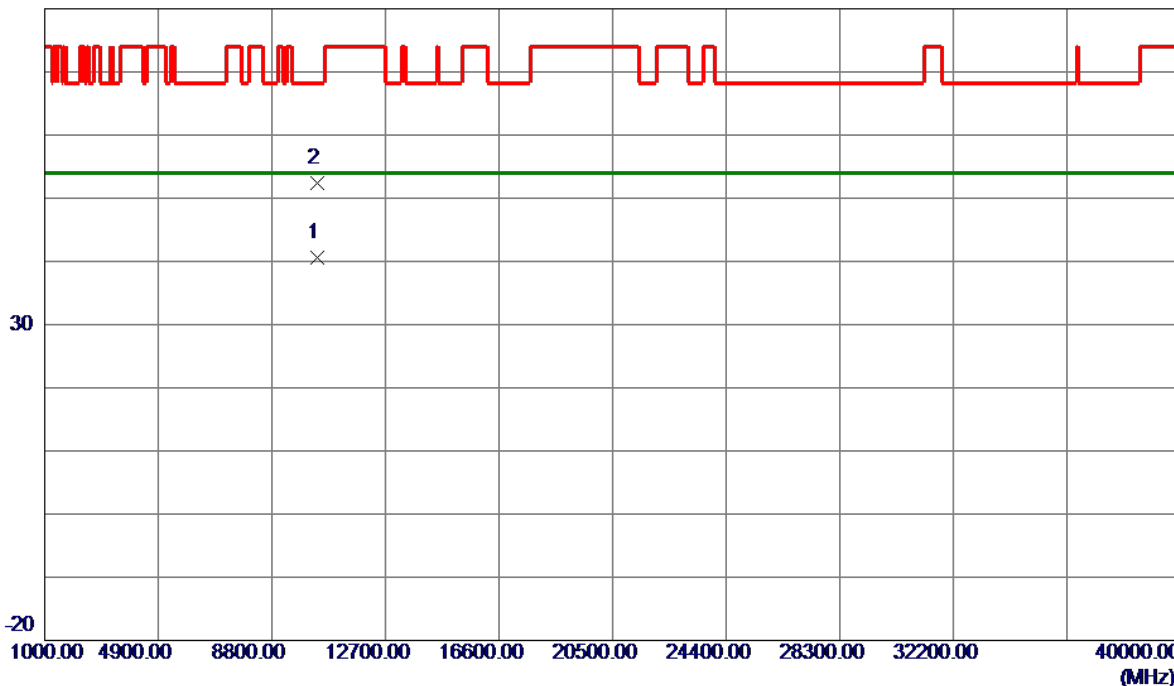


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10358.3400	27.22	13.46	40.68	54.00	-13.32	AVG	
2	10359.2800	38.87	13.46	52.33	68.20	-15.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

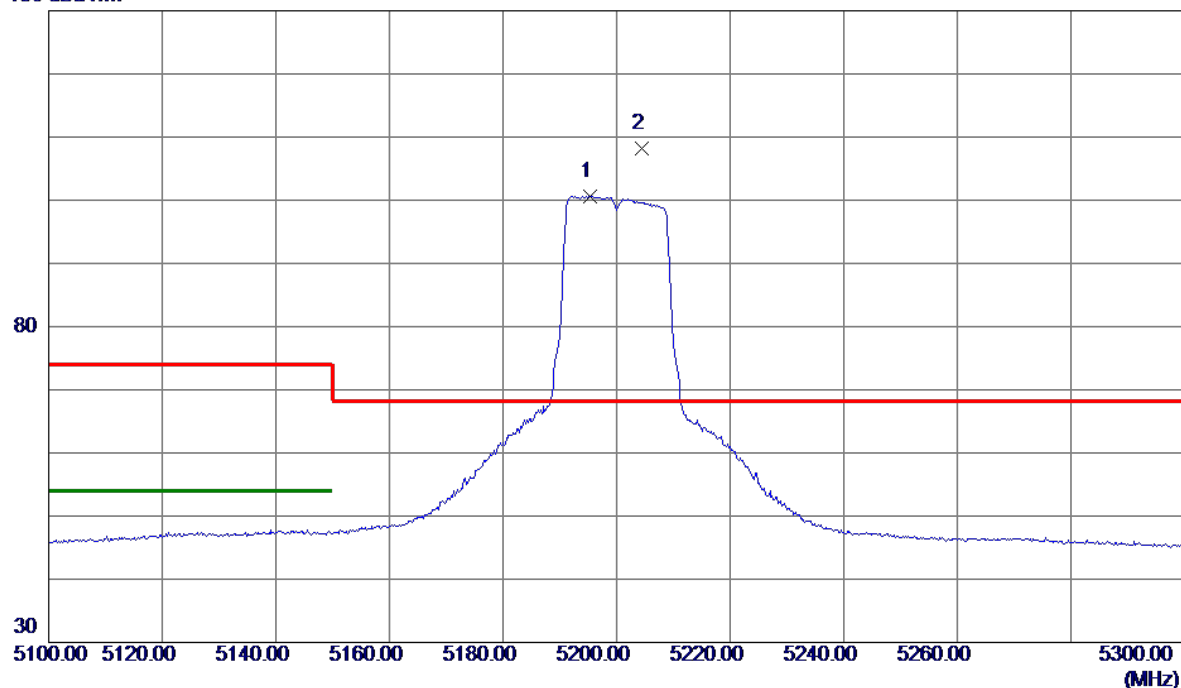


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5195.4000	84.29	16.33	100.62	999.00	-898.38	AVG	No Limit
2 *	5204.4000	91.84	16.34	108.18	68.20	39.98	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

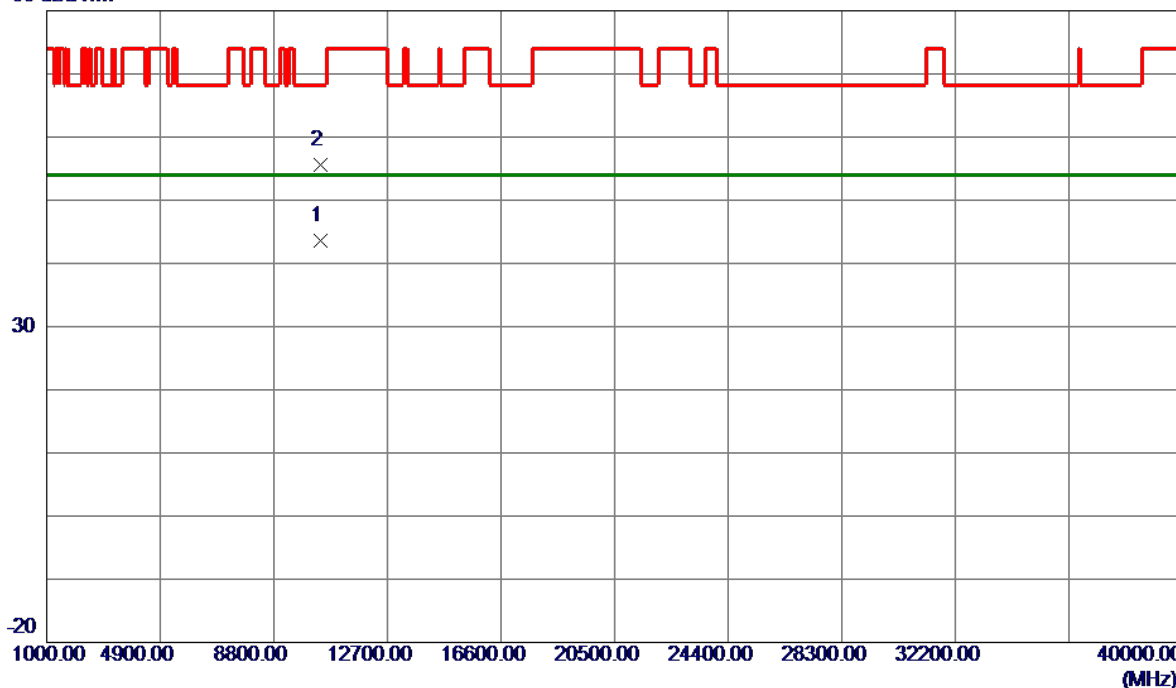


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10399.0599	30.11	13.49	43.60	54.00	-10.40	AVG	
2	10400.2000	42.11	13.49	55.60	68.20	-12.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

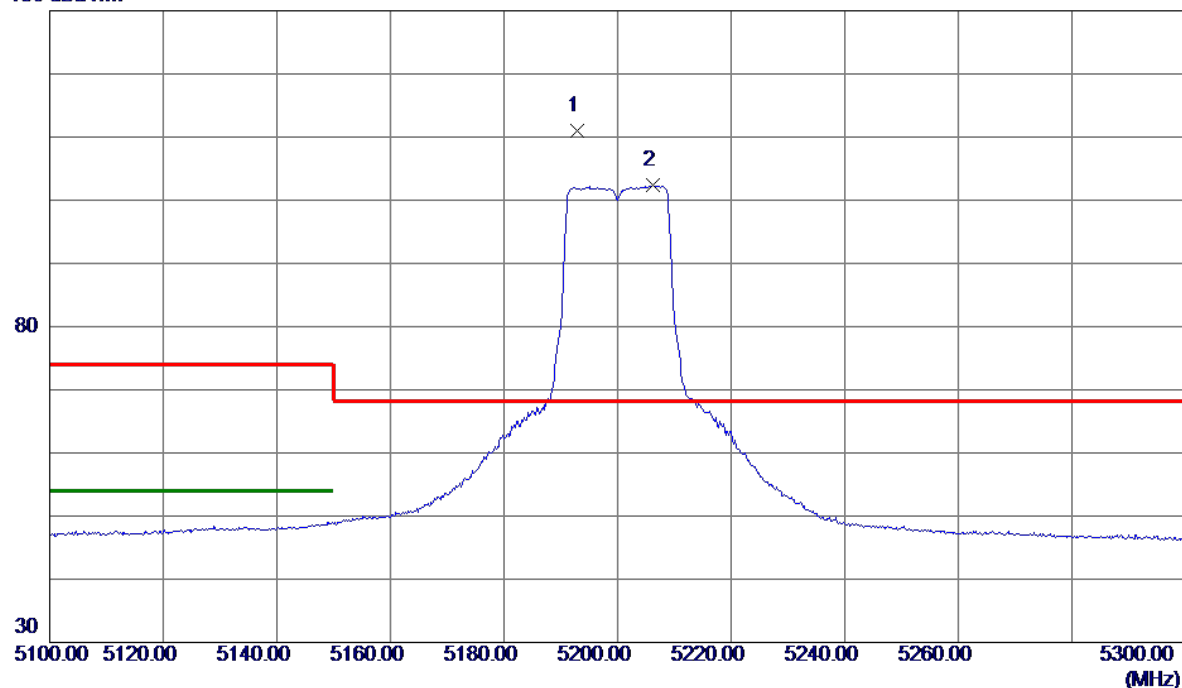


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5192.8000	94.68	16.33	111.01	68.20	42.81	Peak	No Limit
2	5206.2000	85.98	16.34	102.32	999.00	-896.68	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

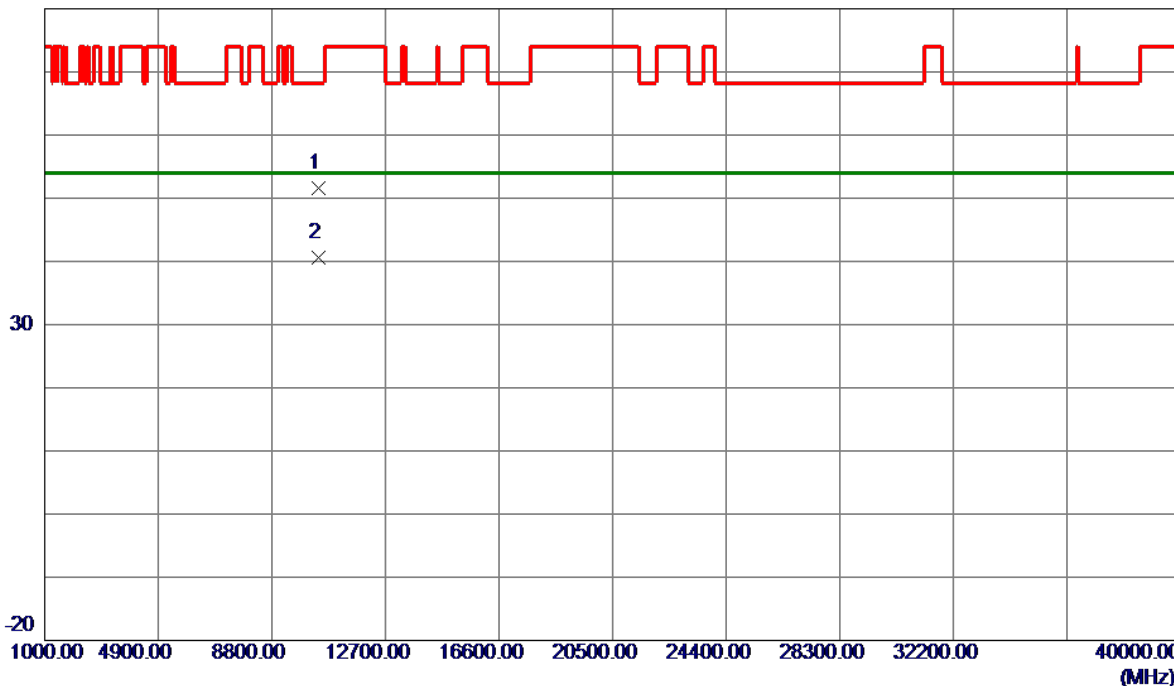


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10397.6200	38.06	13.49	51.55	68.20	-16.65	Peak	
2 *	10397.8000	27.13	13.49	40.62	54.00	-13.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

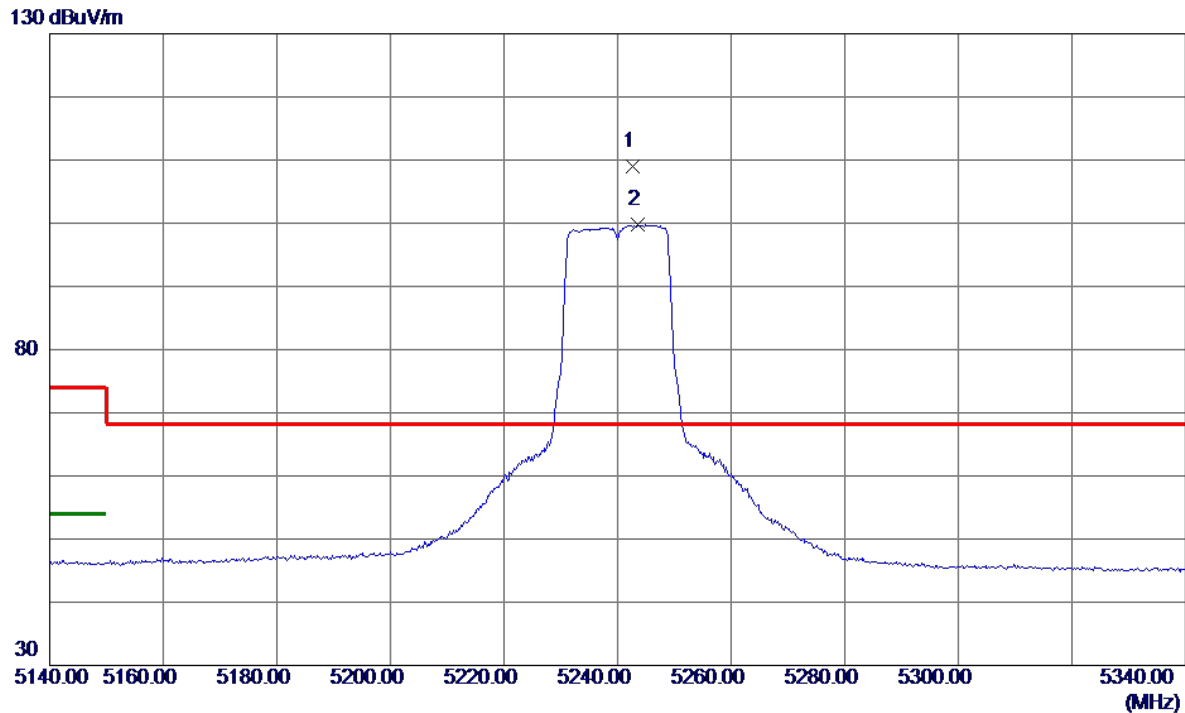


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5242.6000	92.71	16.38	109.09	68.20	40.89	Peak	No Limit
2	5243.6000	83.45	16.39	99.84	999.00	-899.16	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

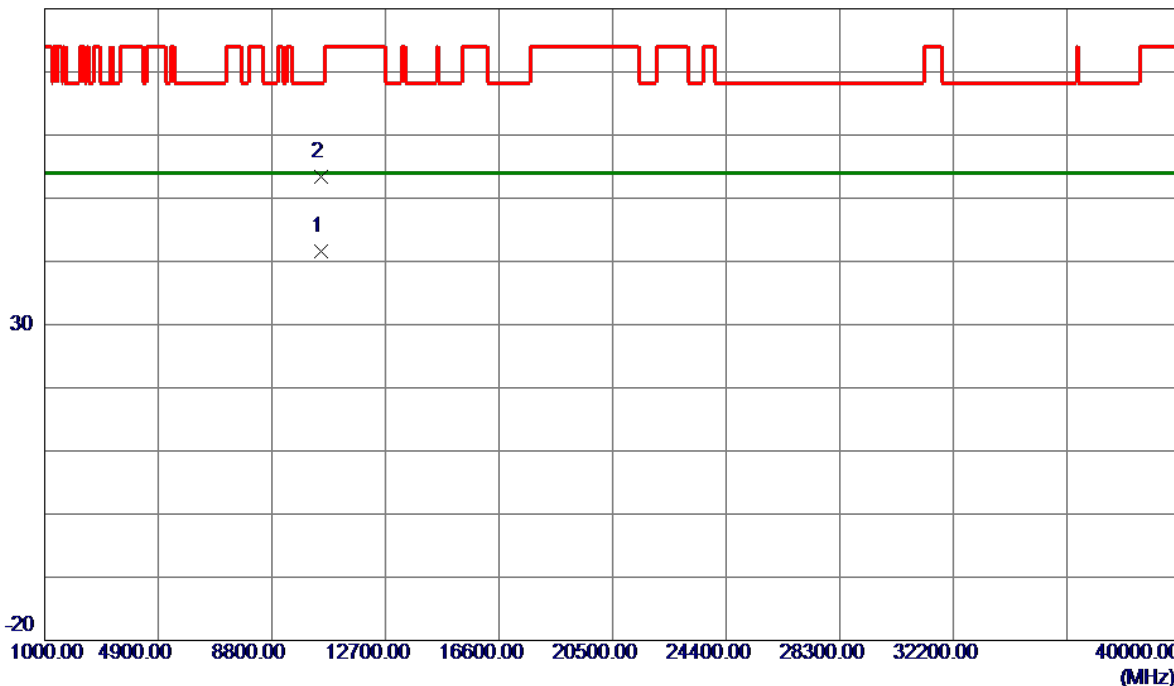


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.7800	28.10	13.56	41.66	54.00	-12.34	AVG	
2	10485.0000	39.84	13.56	53.40	68.20	-14.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

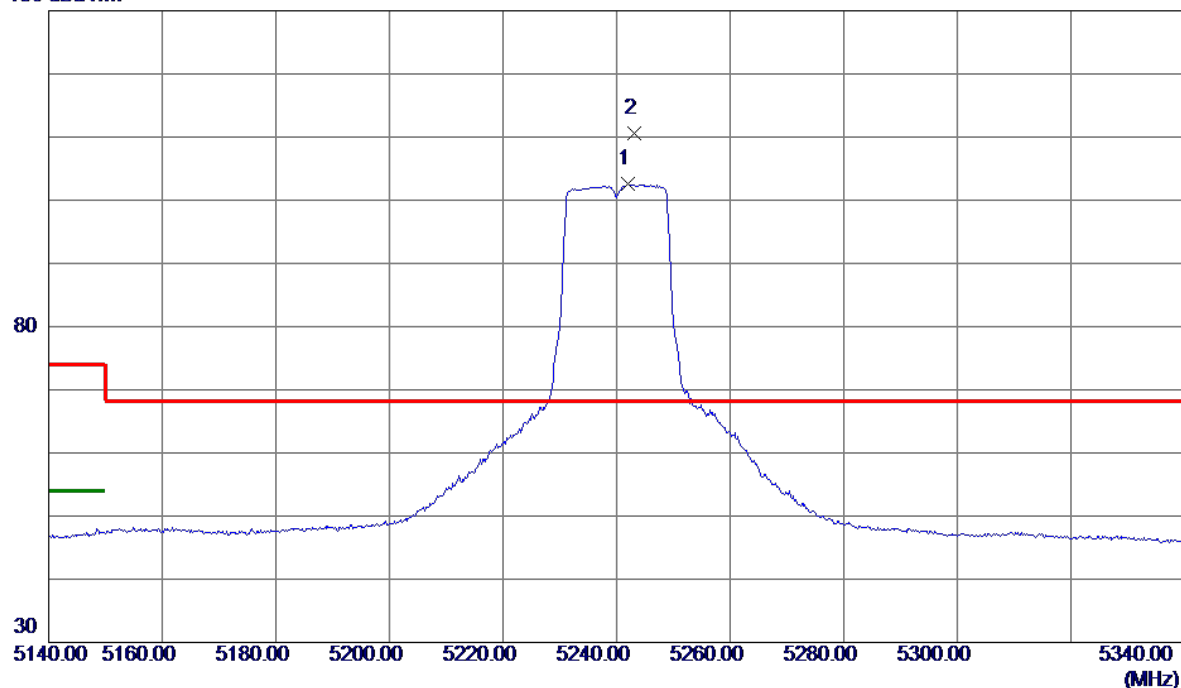


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5242.0000	86.24	16.38	102.62	999.00	-896.38	AVG	No Limit
2 *	5243.2000	94.16	16.39	110.55	68.20	42.35	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

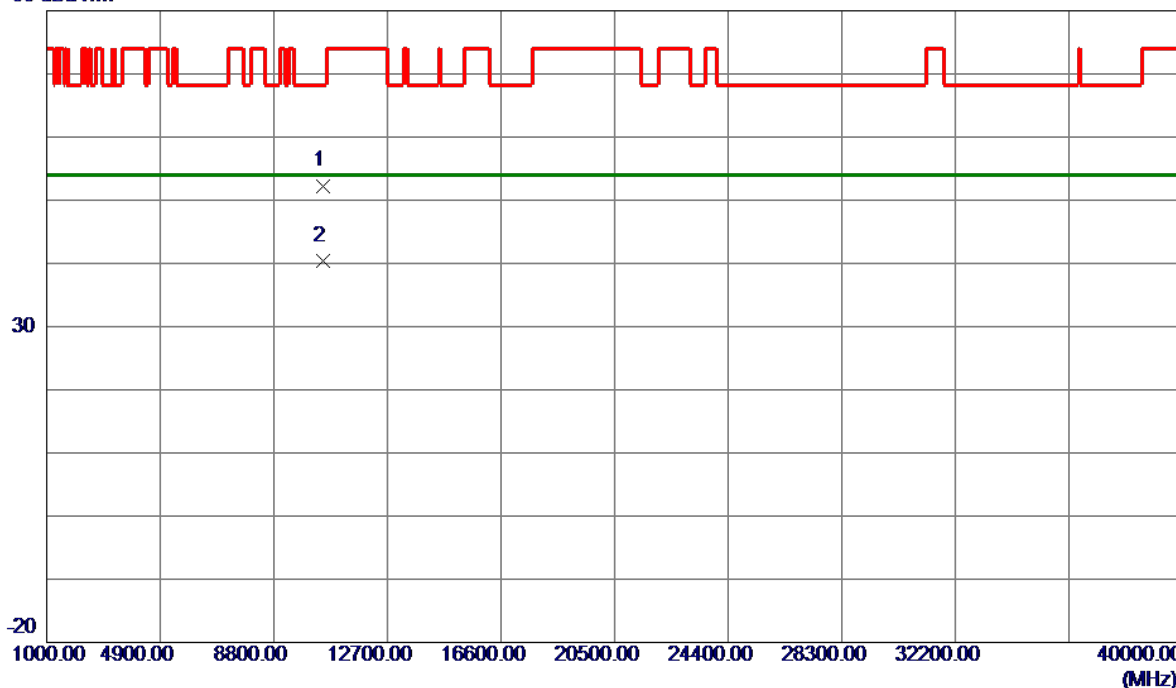


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10476.9400	38.74	13.56	52.30	68.20	-15.90	Peak	
2 *	10480.7200	26.81	13.56	40.37	54.00	-13.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

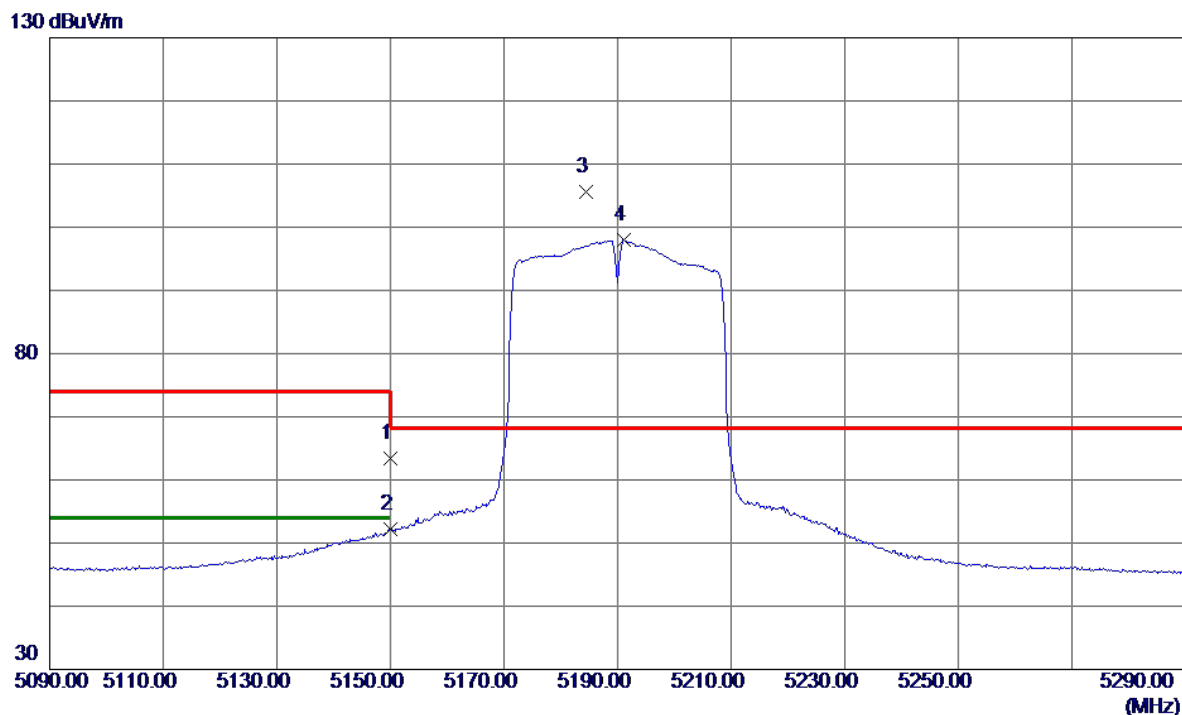


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.03	16.28	63.31	74.00	-10.69	Peak	
2	5150.0000	35.90	16.28	52.18	54.00	-1.82	AVG	
3 *	5184.4000	89.27	16.32	105.59	68.20	37.39	Peak	No Limit
4	5191.2000	81.68	16.33	98.01	999.00	-900.99	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

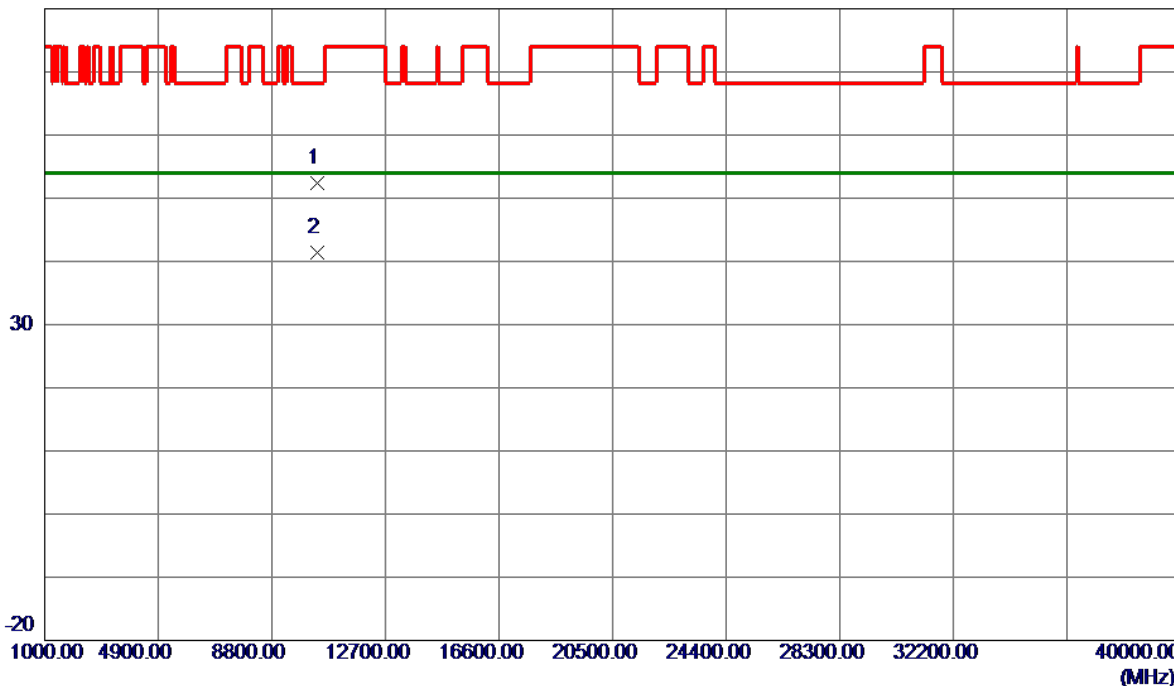


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10374.4200	38.88	13.47	52.35	68.20	-15.85	Peak	
2 *	10379.9800	27.95	13.48	41.43	54.00	-12.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

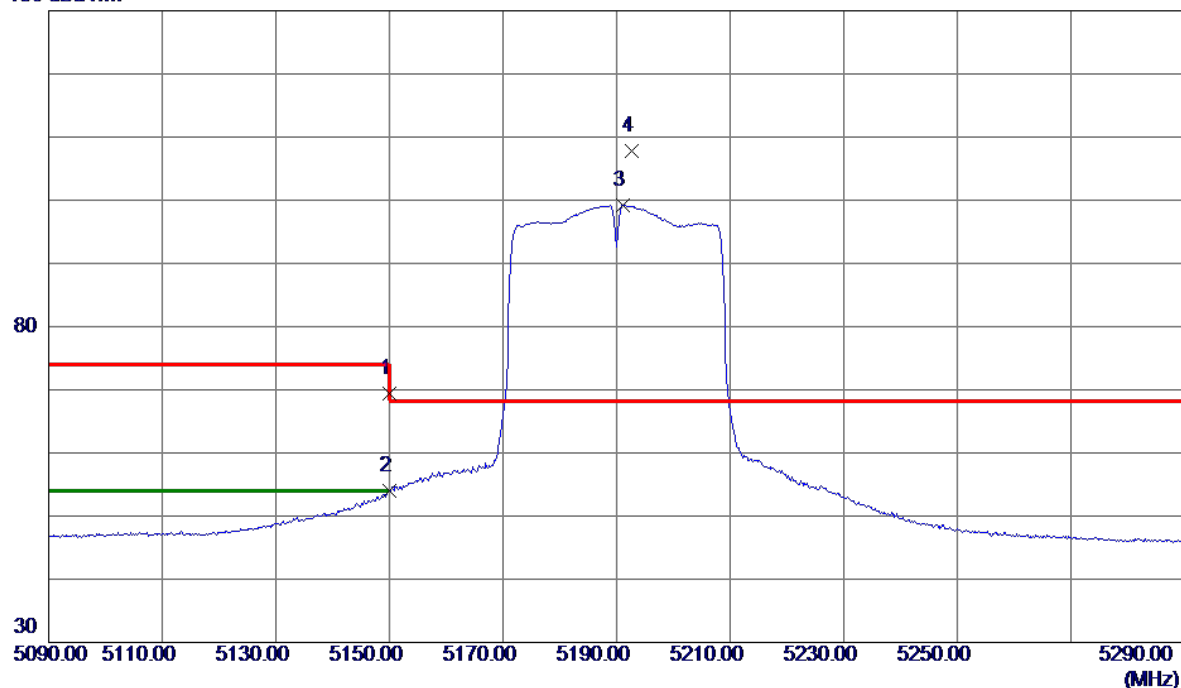


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	53.05	16.28	69.33	74.00	-4.67	Peak	
2	5150.0000	37.65	16.28	53.93	54.00	-0.07	AVG	
3	5191.2000	82.91	16.33	99.24	999.00	-899.76	AVG	No Limit
4 *	5192.6000	91.54	16.33	107.87	68.20	39.67	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

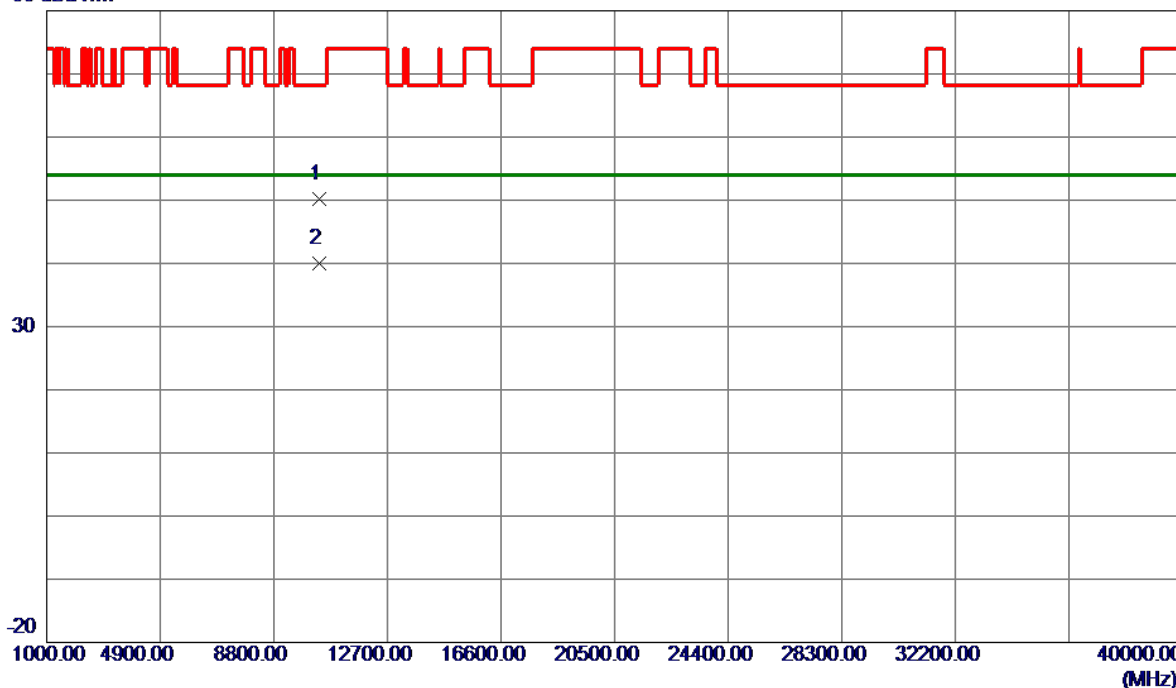


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10379.3400	36.74	13.47	50.21	68.20	-17.99	Peak	
2 *	10380.9400	26.45	13.48	39.93	54.00	-14.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

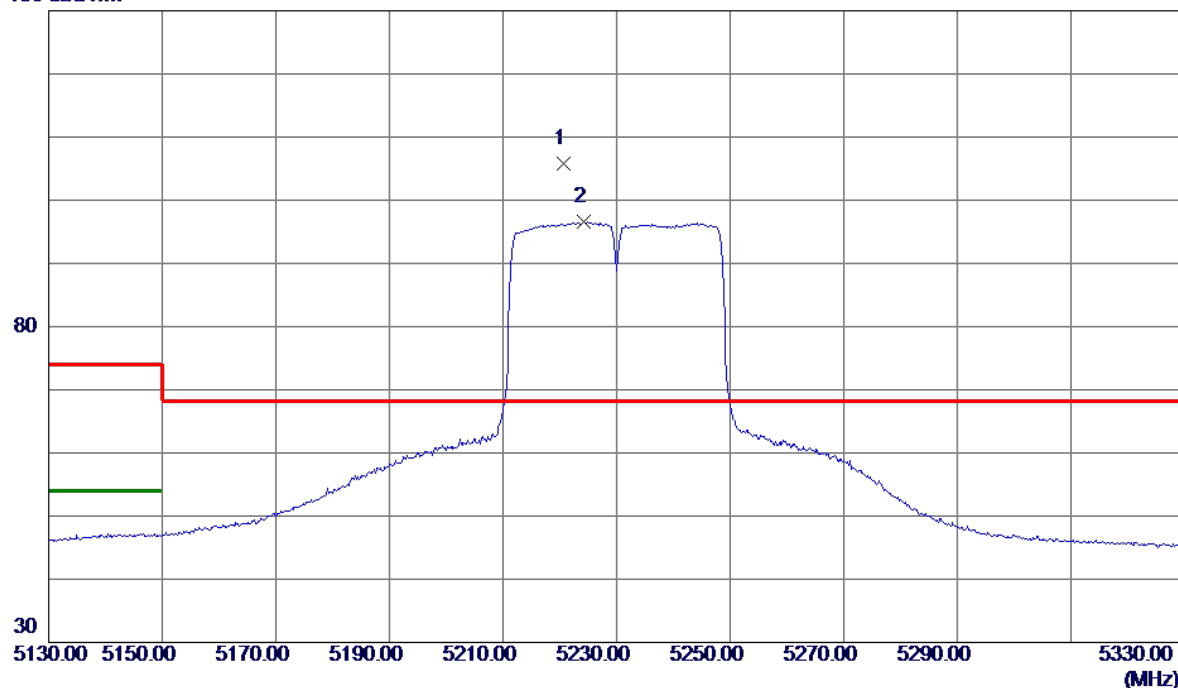


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5220.6000	89.53	16.36	105.89	68.20	37.69	Peak	No Limit
2	5224.2000	80.22	16.36	96.58	999.00	-902.42	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

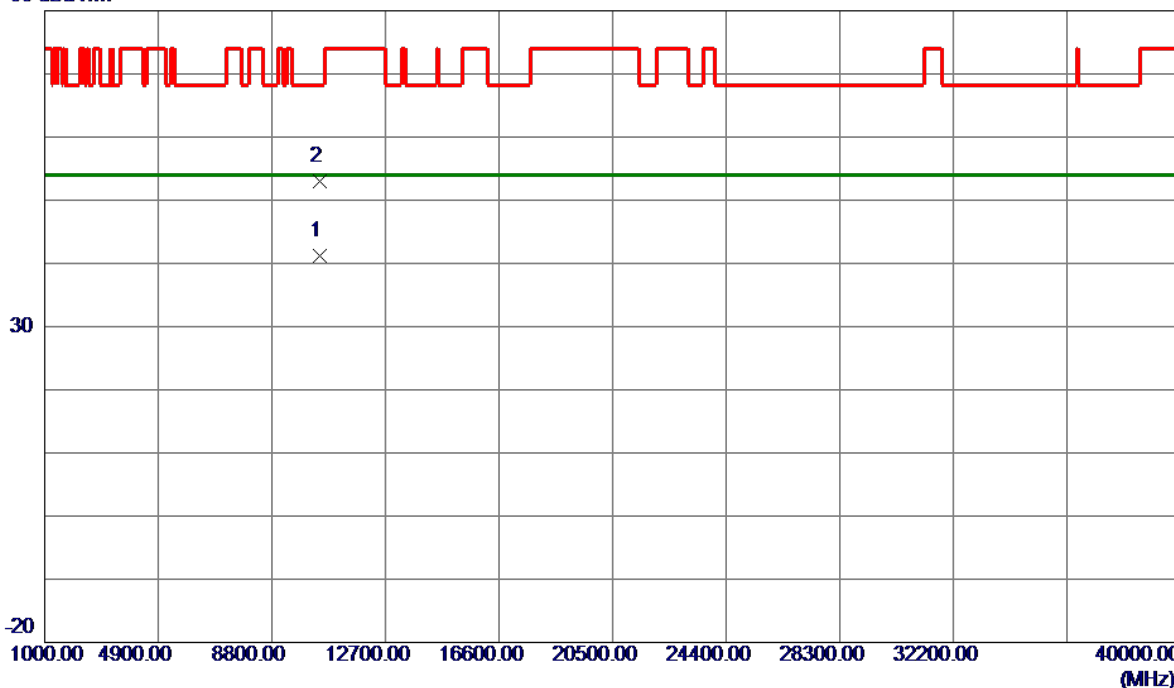


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.9000	27.58	13.54	41.12	54.00	-12.88	AVG	
2	10459.0000	39.37	13.54	52.91	68.20	-15.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

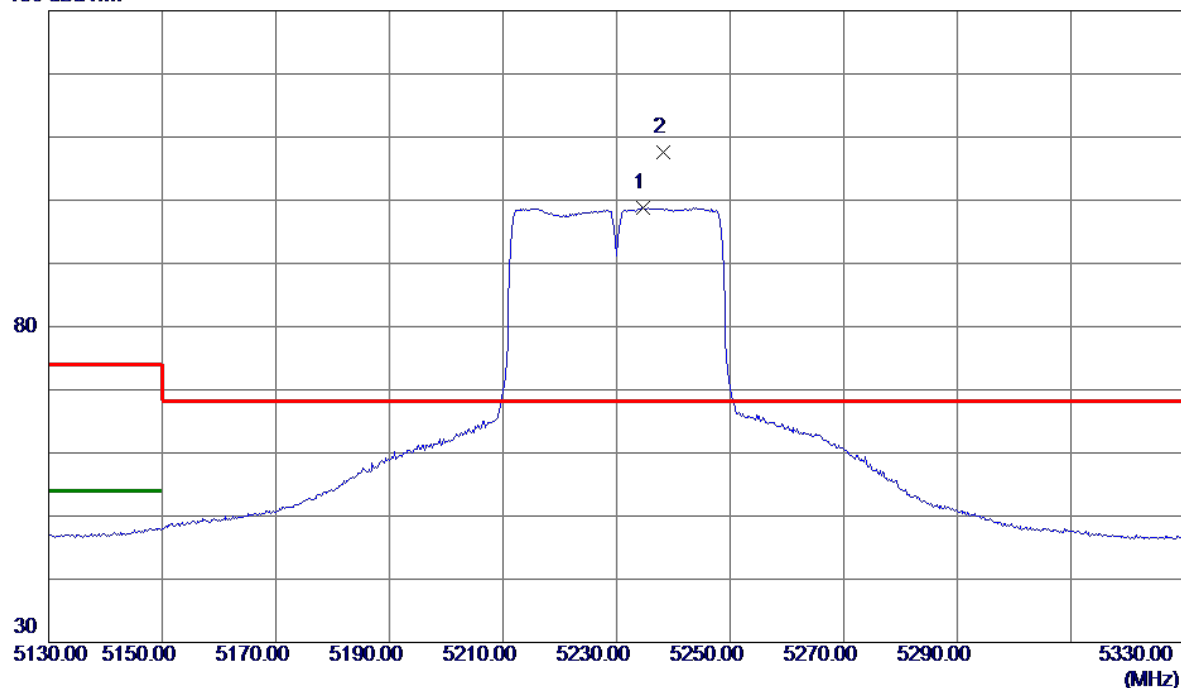


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5234.6000	82.44	16.38	98.82	999.00	-900.18	AVG	No Limit
2 *	5238.2000	91.21	16.38	107.59	68.20	39.39	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

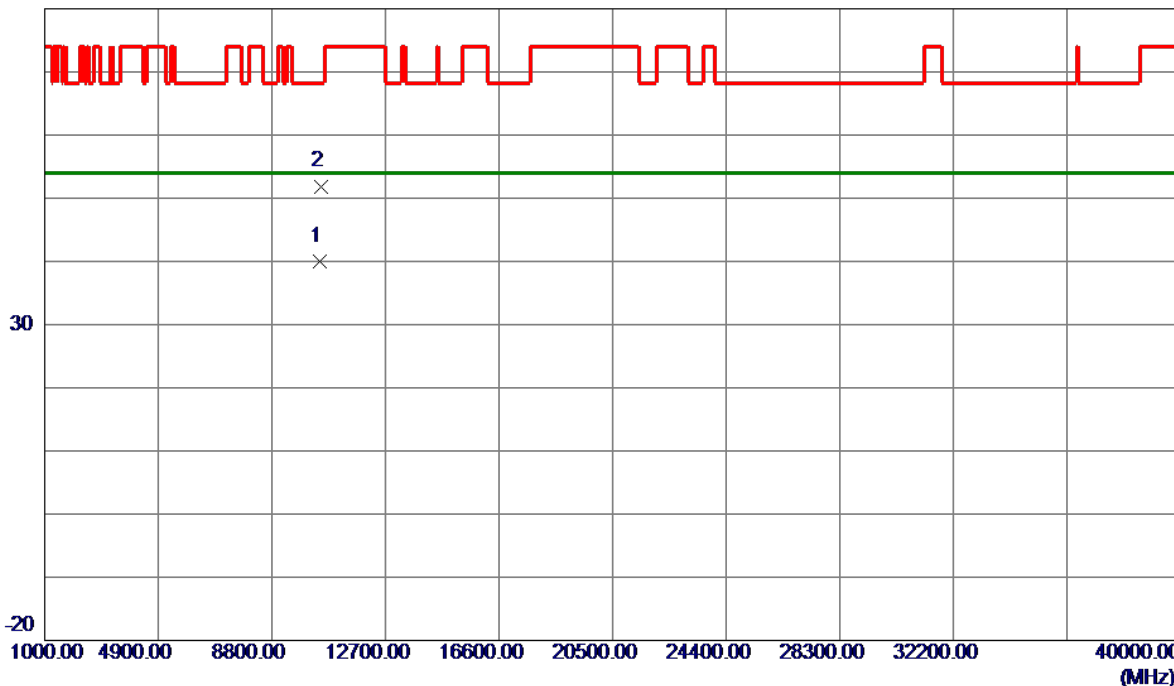


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10464.8800	26.53	13.55	40.08	54.00	-13.92	AVG	
2	10469.5199	38.35	13.55	51.90	68.20	-16.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

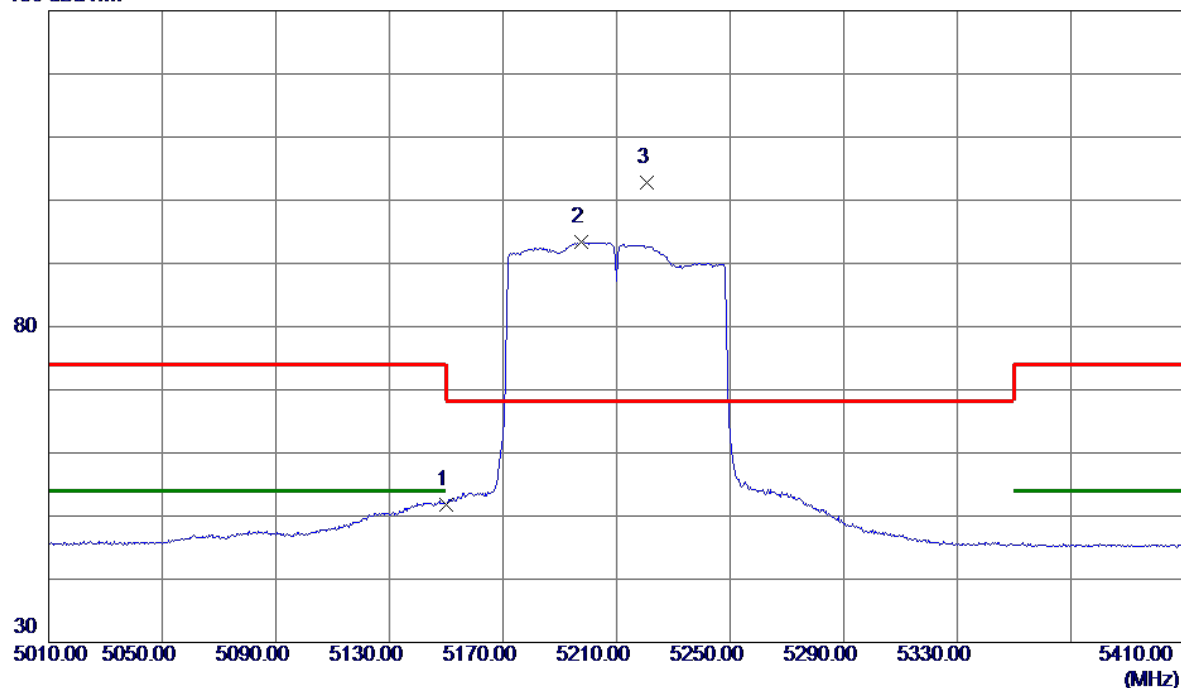


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.50	16.28	51.78	54.00	-2.22	AVG	
2	5197.6000	77.05	16.34	93.39	999.00	-905.61	AVG	No Limit
3 *	5220.8000	86.51	16.36	102.87	68.20	34.67	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

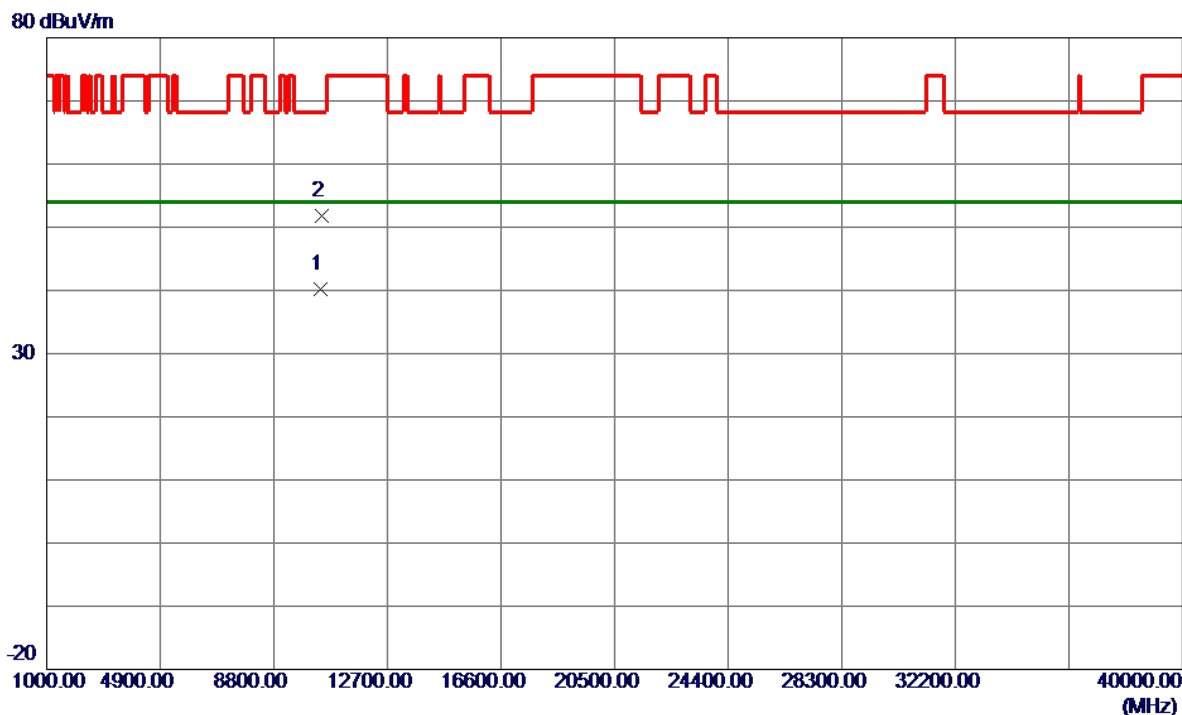


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10415.5000	26.75	13.50	40.25	54.00	-13.75	AVG	
2	10427.1000	38.28	13.51	51.79	68.20	-16.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

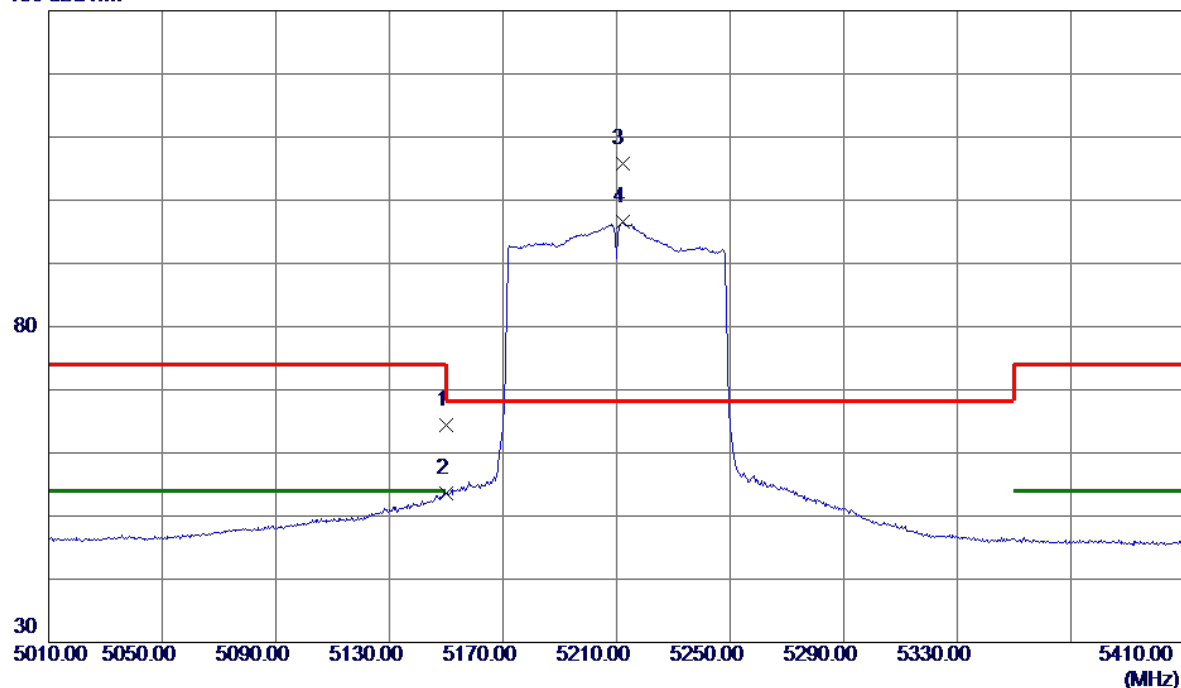


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.03	16.28	64.31	74.00	-9.69	Peak	
2	5150.0000	37.23	16.28	53.51	54.00	-0.49	AVG	
3 *	5212.0000	89.40	16.35	105.75	68.20	37.55	Peak	No Limit
4	5212.4000	80.25	16.35	96.60	999.00	-902.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

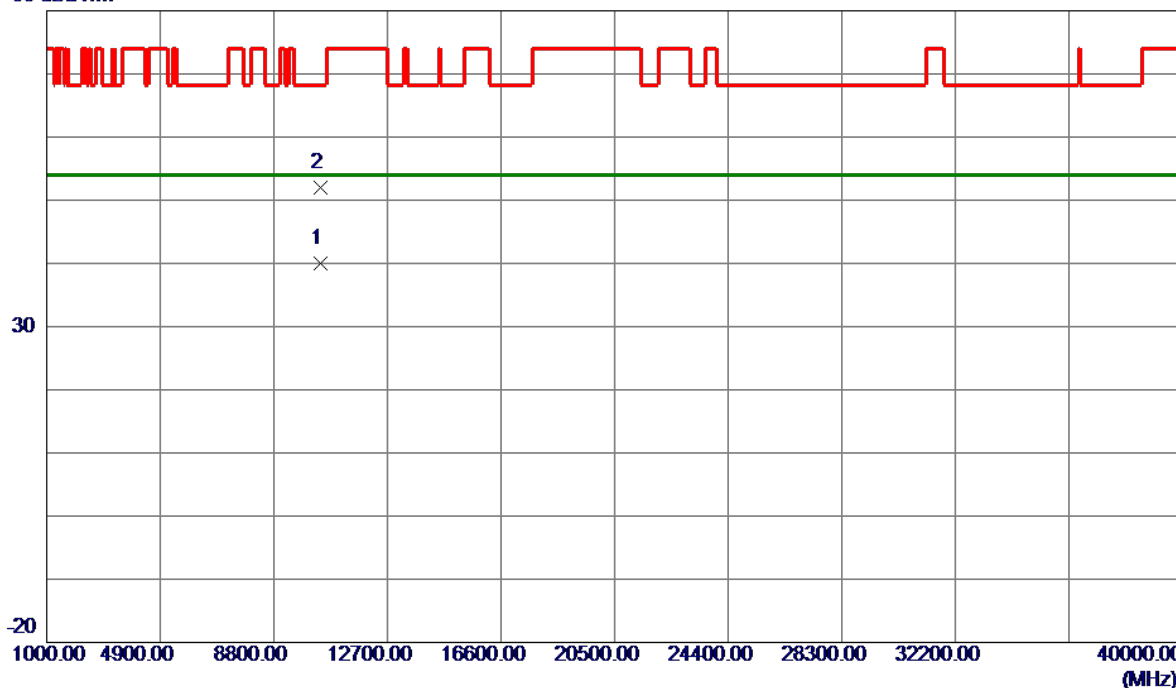


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10411.2000	26.41	13.50	39.91	54.00	-14.09	AVG	
2	10416.7200	38.53	13.51	52.04	68.20	-16.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

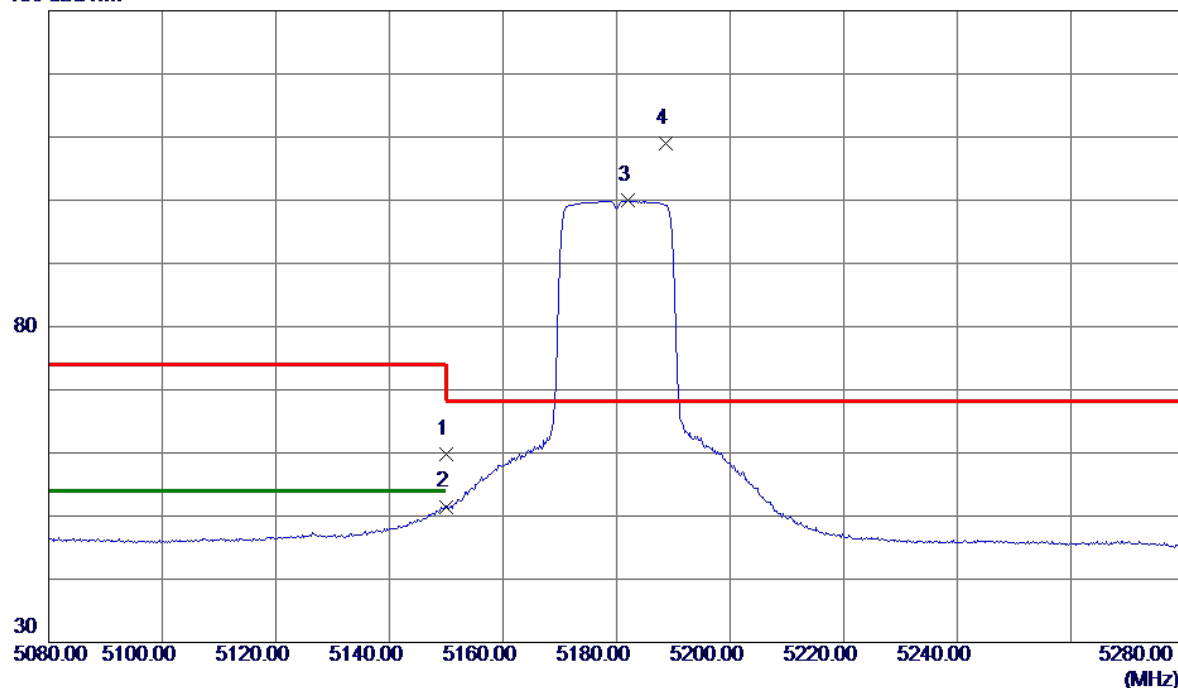


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.47	16.28	59.75	74.00	-14.25	Peak	
2	5150.0000	35.22	16.28	51.50	54.00	-2.50	AVG	
3	5182.0000	83.59	16.32	99.91	999.00	-899.09	AVG	No Limit
4 *	5188.6000	92.74	16.33	109.07	68.20	40.87	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

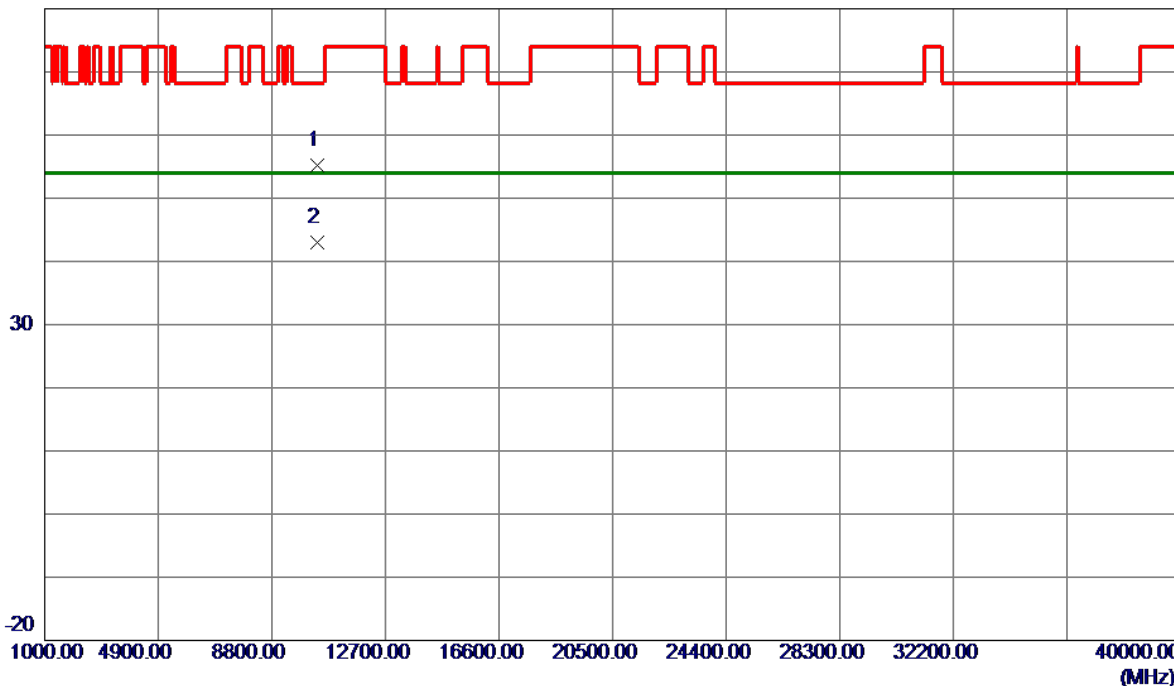


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10354.9400	41.67	13.45	55.12	68.20	-13.08	Peak	
2 *	10359.8600	29.49	13.46	42.95	54.00	-11.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

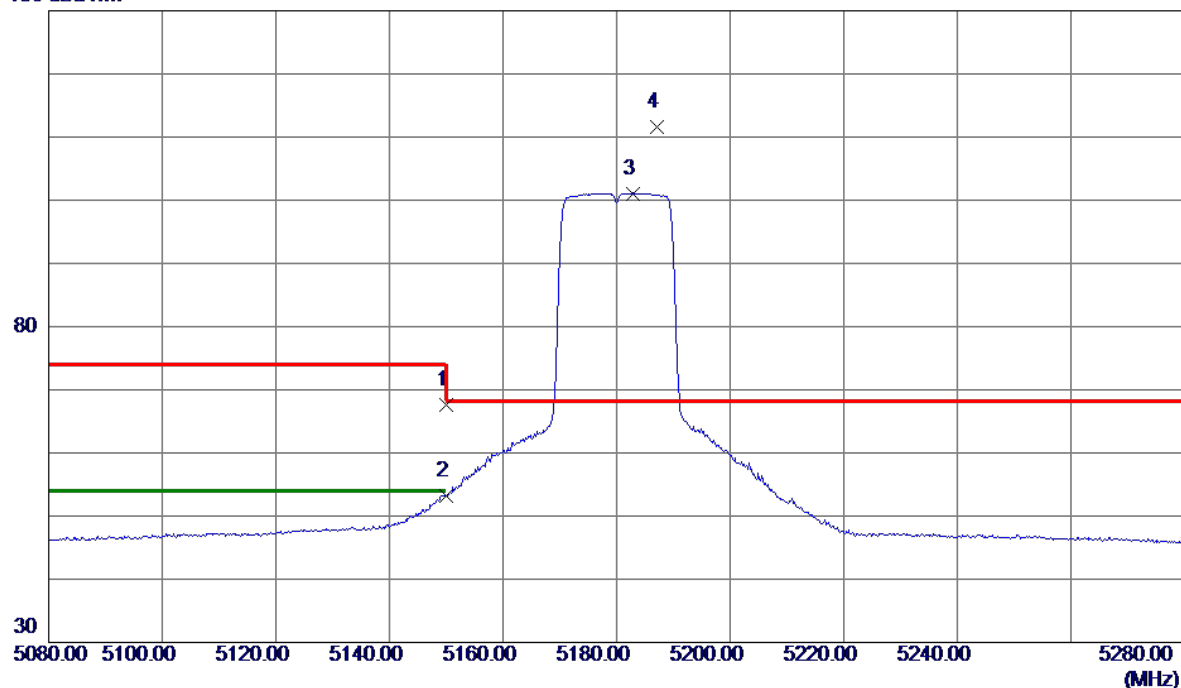


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	51.28	16.28	67.56	74.00	-6.44	Peak	
2	5150.0000	36.99	16.28	53.27	54.00	-0.73	AVG	
3	5182.8000	84.78	16.32	101.10	999.00	-897.90	AVG	No Limit
4 *	5187.2000	95.19	16.32	111.51	68.20	43.31	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

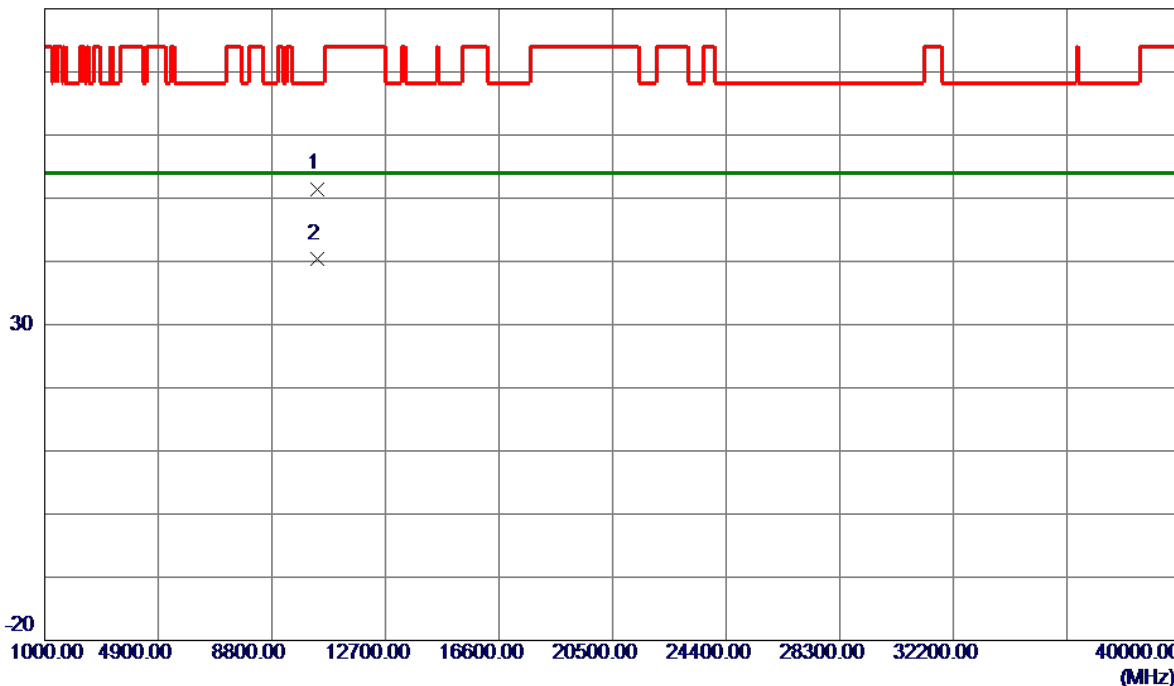


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10351.5199	38.05	13.45	51.50	68.20	-16.70	Peak	
2 *	10354.6800	27.00	13.45	40.45	54.00	-13.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

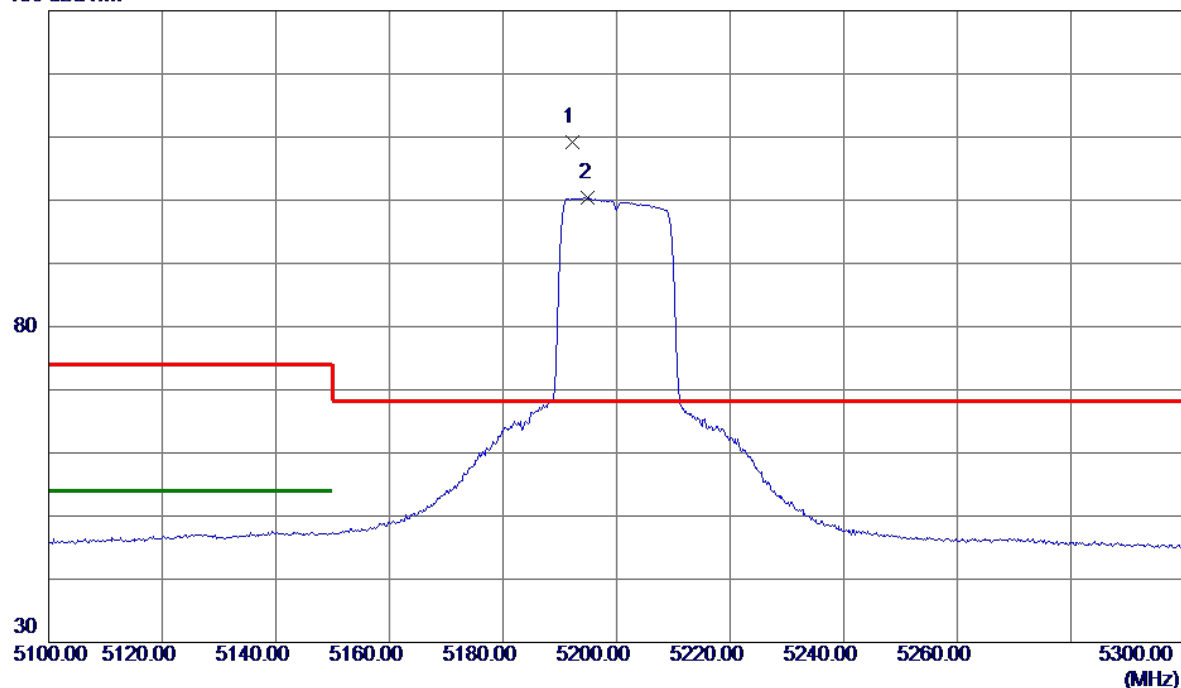


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5192.2000	92.85	16.33	109.18	68.20	40.98	Peak	No Limit
2	5195.0000	83.98	16.33	100.31	999.00	-898.69	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

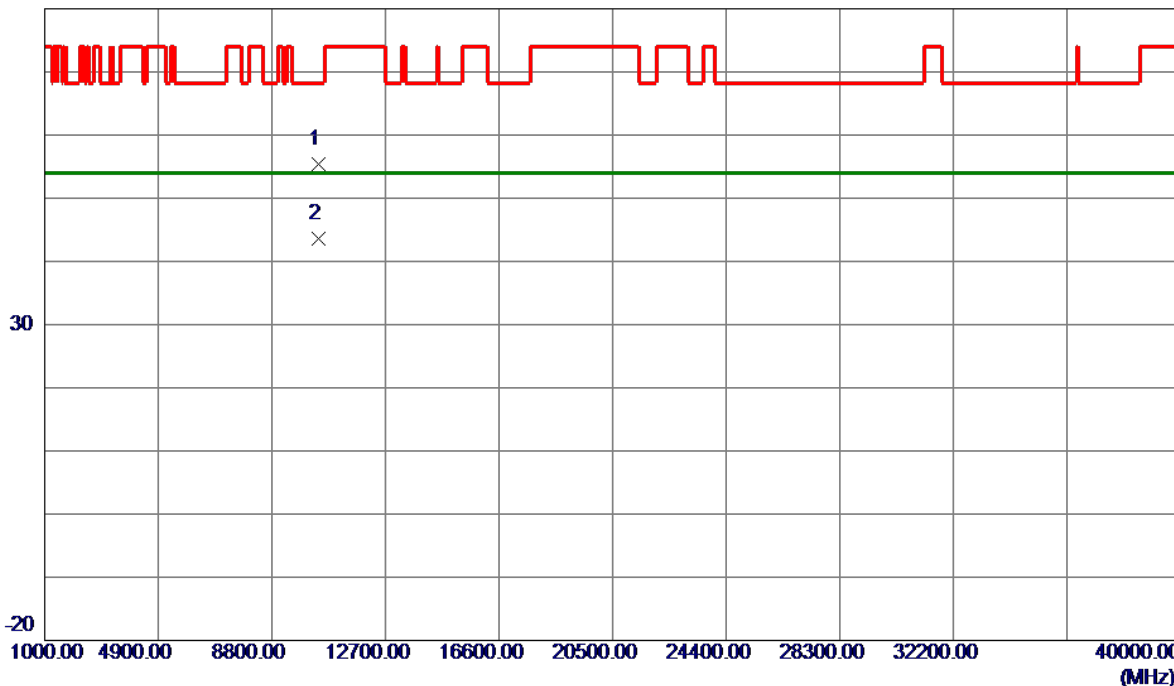


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10399.6000	41.84	13.49	55.33	68.20	-12.87	Peak	
2 *	10400.3400	30.03	13.49	43.52	54.00	-10.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

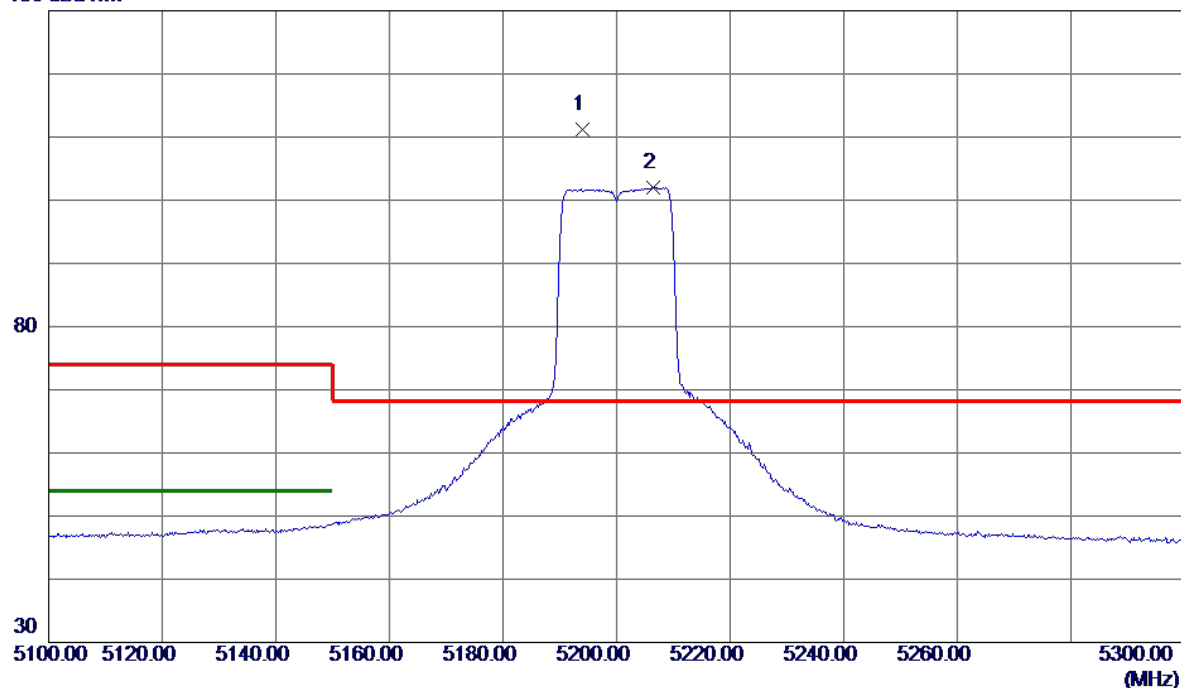


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5194.0000	94.86	16.33	111.19	68.20	42.99	Peak	No Limit
2	5206.4000	85.70	16.34	102.04	999.00	-896.96	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

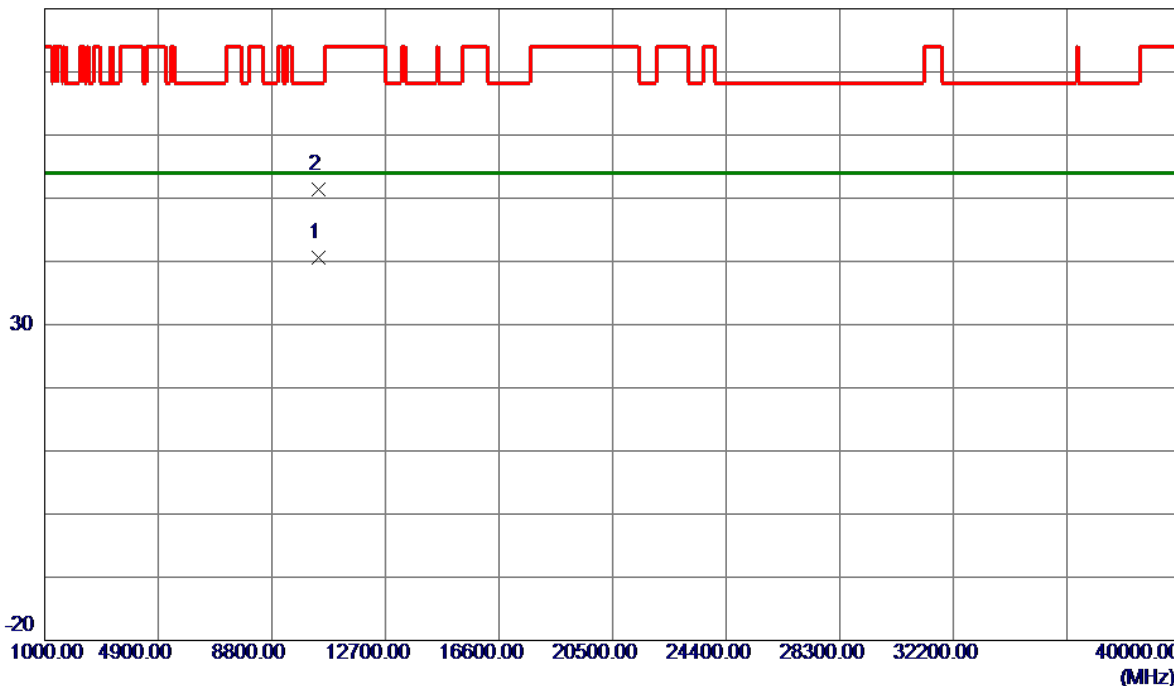


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.8400	27.20	13.49	40.69	54.00	-13.31	AVG	
2	10399.1800	37.95	13.49	51.44	68.20	-16.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

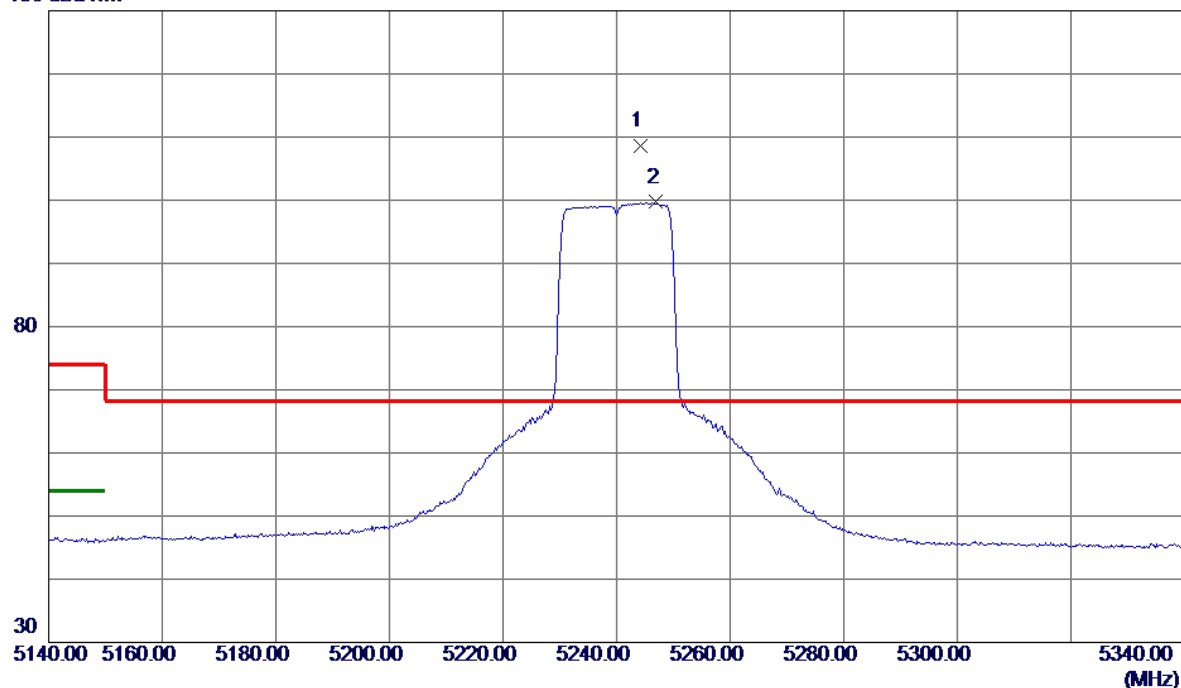


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5244.2000	92.17	16.39	108.56	68.20	40.36	Peak	No Limit
2	5247.0000	83.31	16.39	99.70	999.00	-899.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

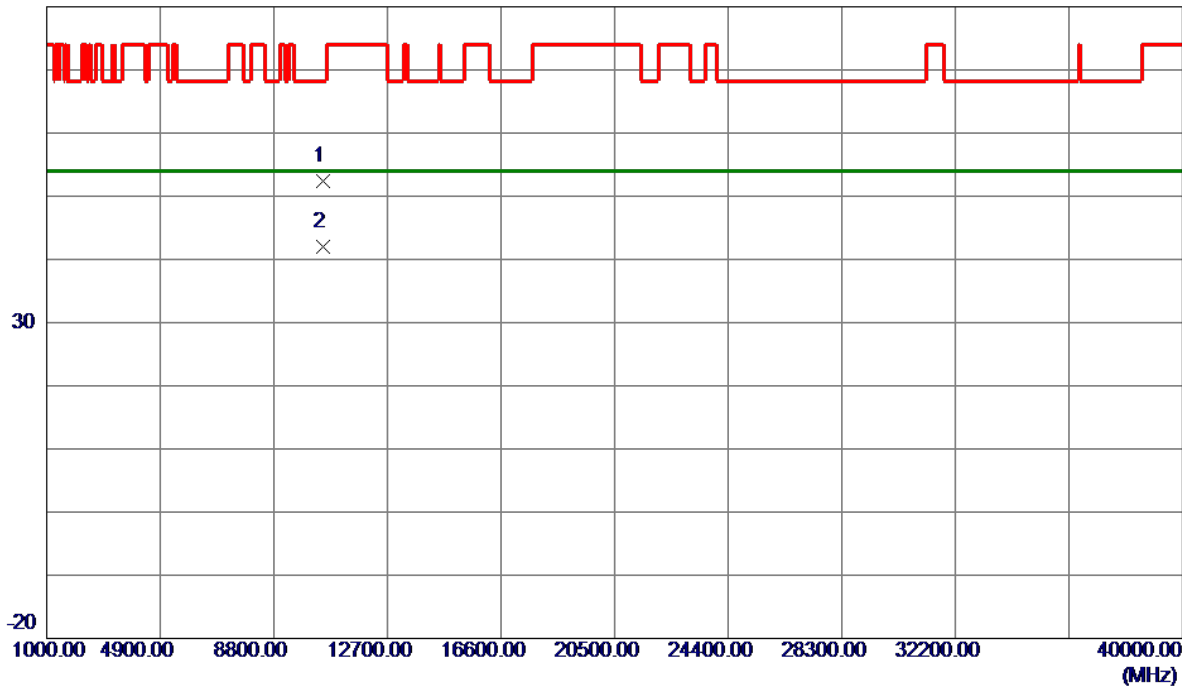


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10478.4000	38.92	13.56	52.48	68.20	-15.72	Peak	
2 *	10479.6200	28.40	13.56	41.96	54.00	-12.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

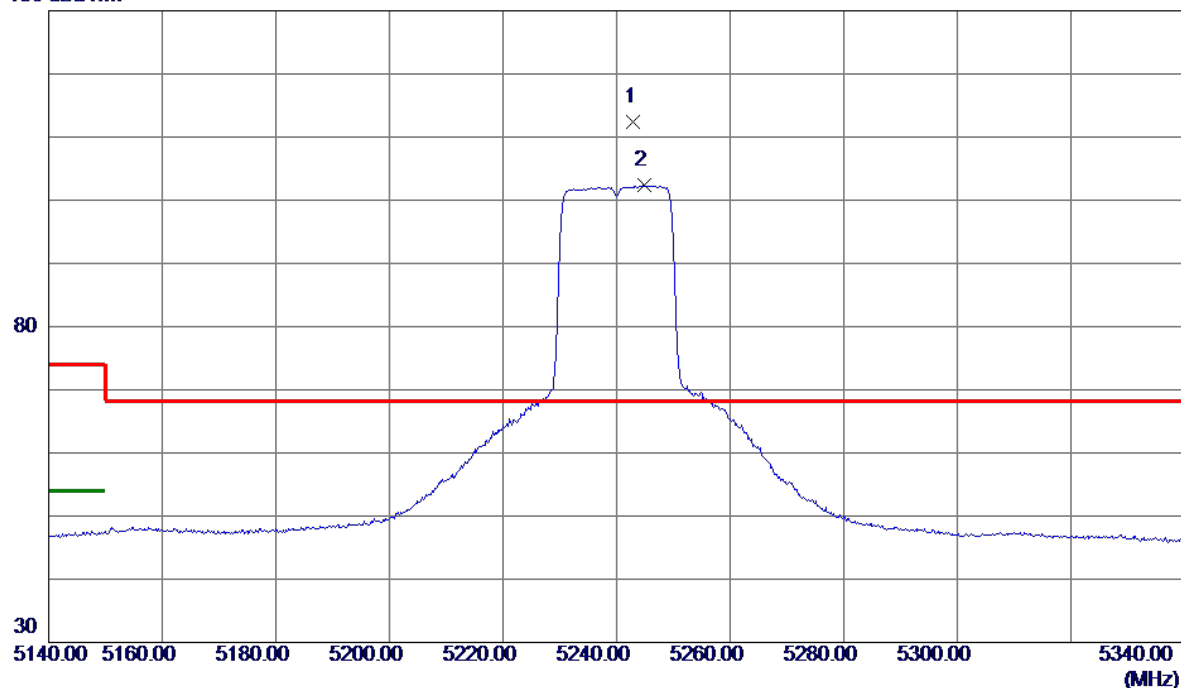


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5243.0000	95.98	16.38	112.36	68.20	44.16	Peak	No Limit
2	5244.8000	86.02	16.39	102.41	999.00	-896.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

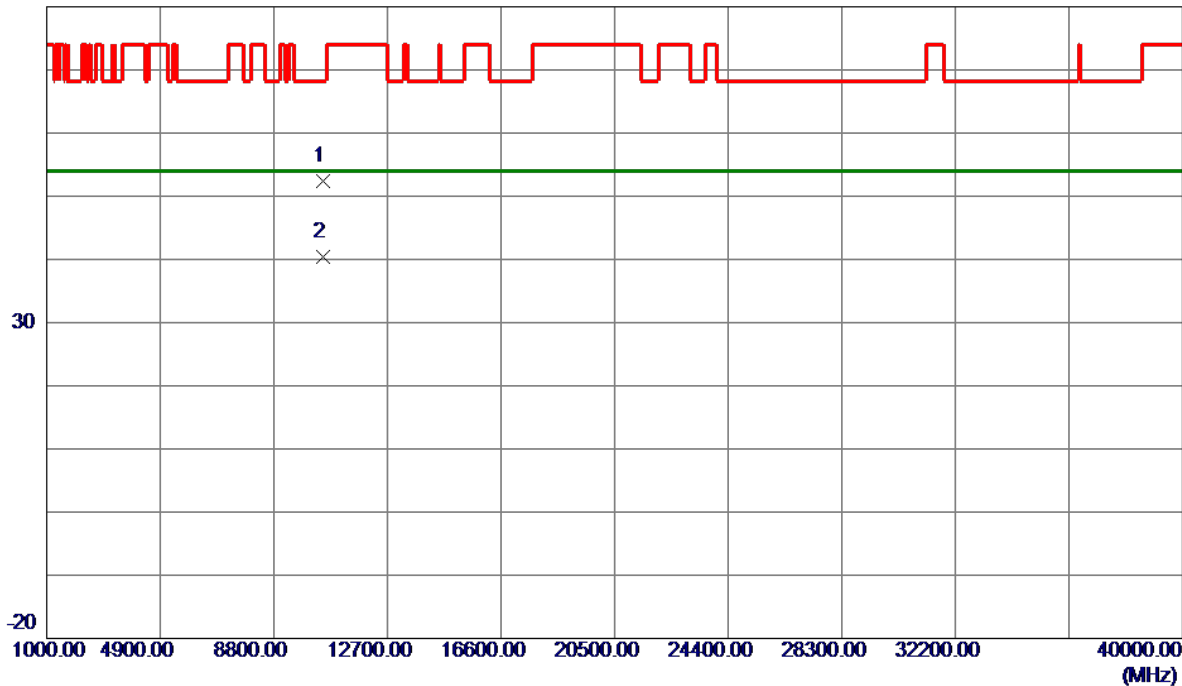


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10479.9200	38.78	13.56	52.34	68.20	-15.86	Peak	
2 *	10484.4400	26.90	13.56	40.46	54.00	-13.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

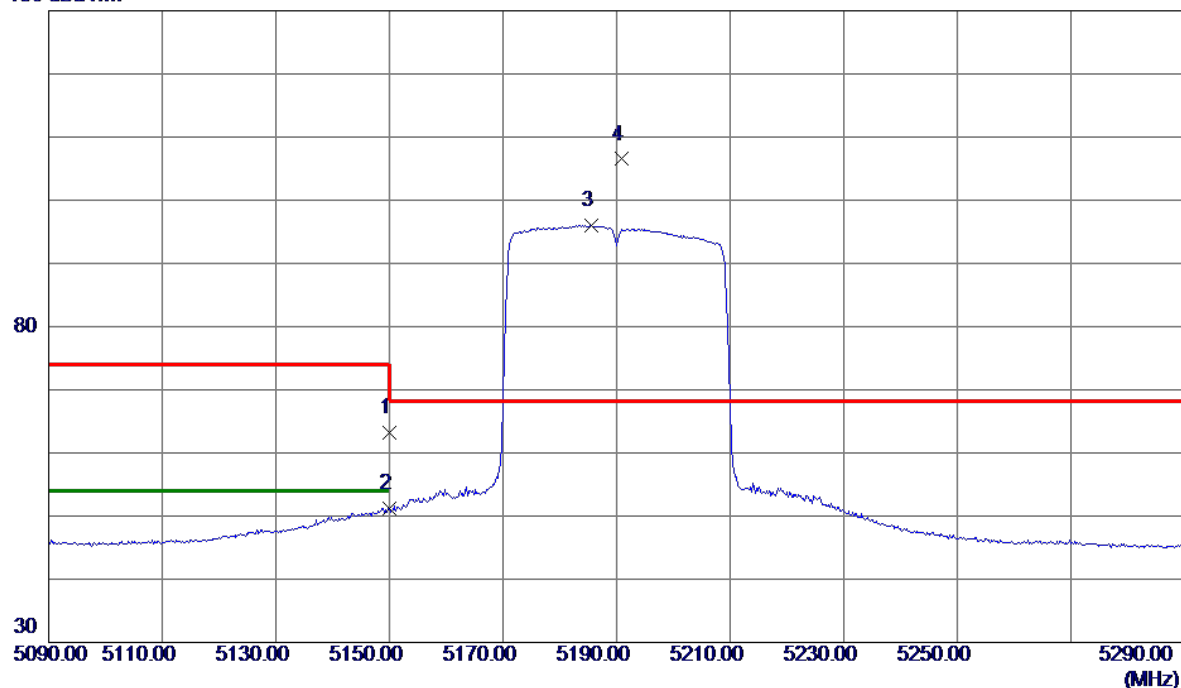


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.83	16.28	63.11	74.00	-10.89	Peak	
2	5150.0000	35.00	16.28	51.28	54.00	-2.72	AVG	
3	5185.6000	79.76	16.32	96.08	999.00	-902.92	AVG	No Limit
4 *	5190.8000	90.17	16.33	106.50	68.20	38.30	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

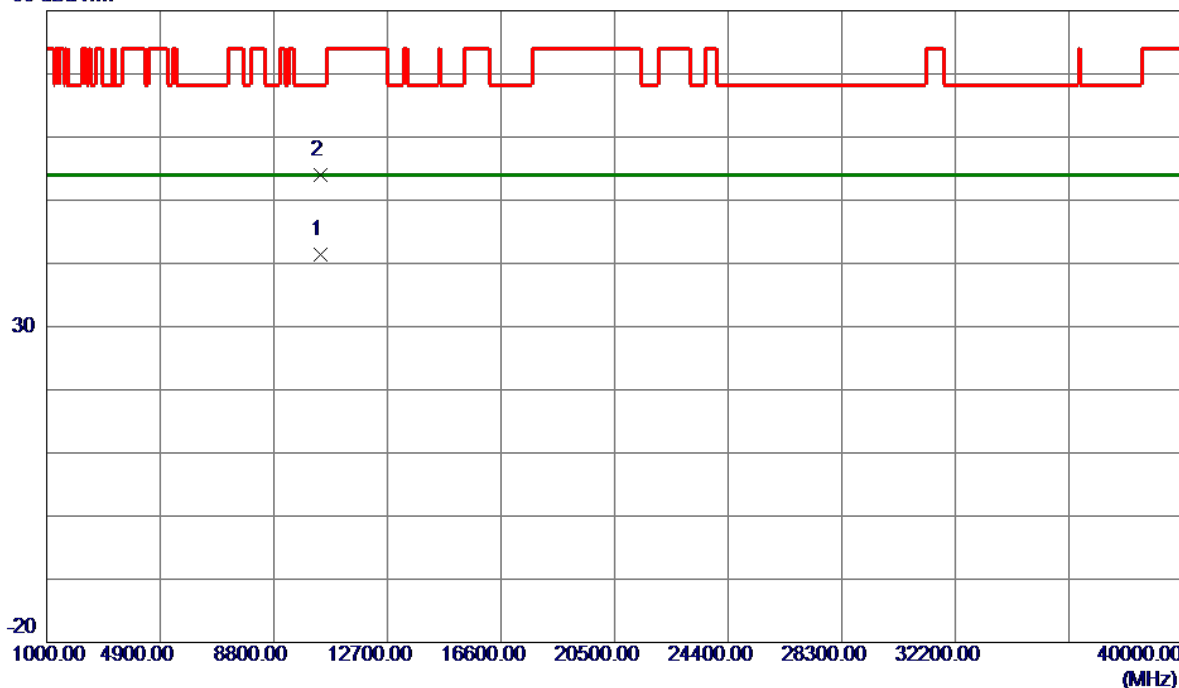


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10384.9600	27.90	13.48	41.38	54.00	-12.62	AVG	
2	10384.9800	40.44	13.48	53.92	68.20	-14.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

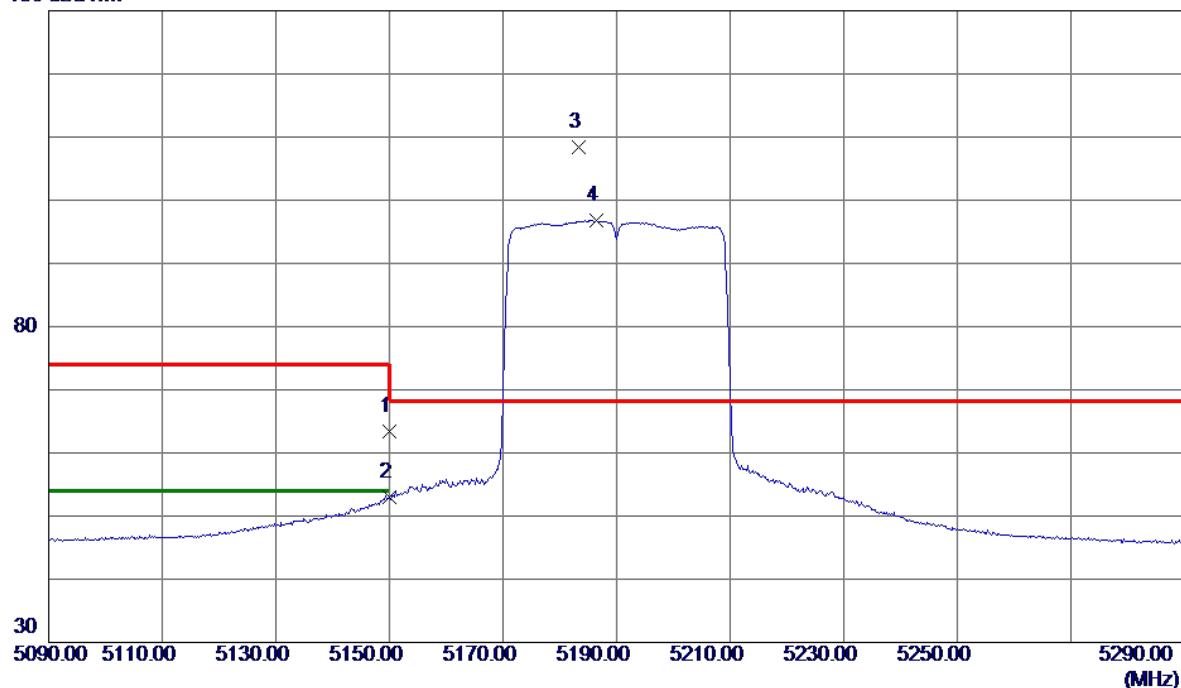


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.21	16.28	63.49	74.00	-10.51	Peak	
2	5150.0000	36.71	16.28	52.99	54.00	-1.01	AVG	
3 *	5183.4000	91.99	16.32	108.31	68.20	40.11	Peak	No Limit
4	5186.4000	80.51	16.32	96.83	999.00	-902.17	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

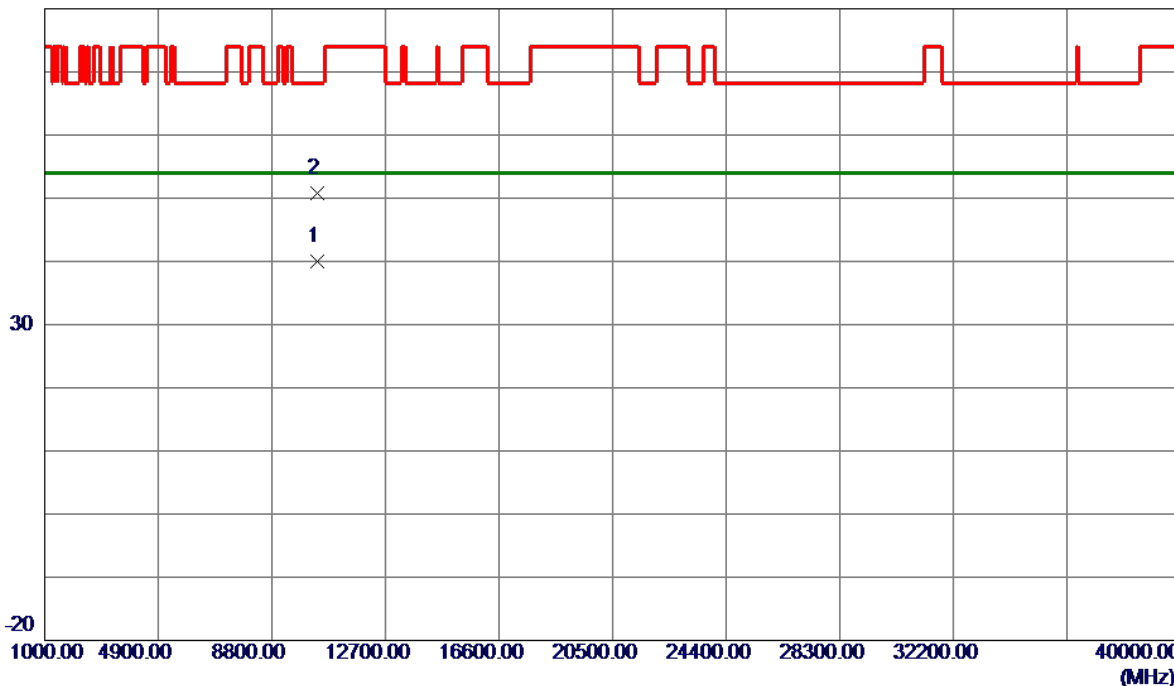


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10375.6400	26.58	13.47	40.05	54.00	-13.95	AVG	
2	10381.5199	37.25	13.48	50.73	68.20	-17.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

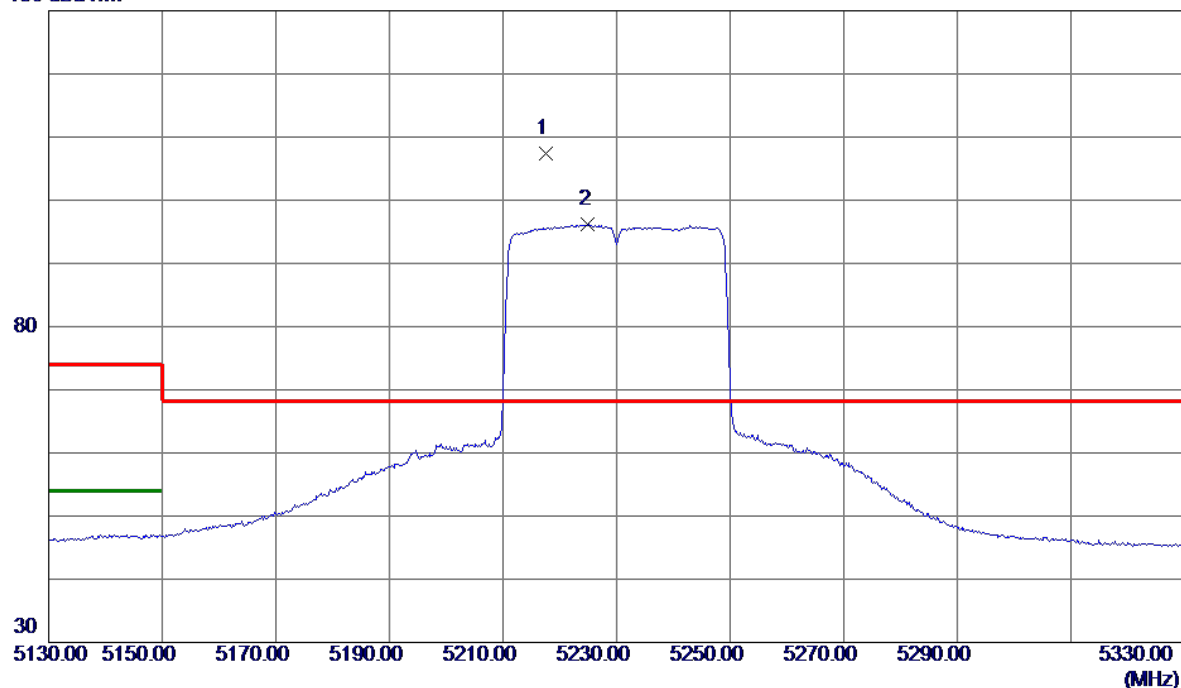


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5217.6000	91.07	16.36	107.43	68.20	39.23	Peak	No Limit
2	5225.0000	79.74	16.37	96.11	999.00	-902.89	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

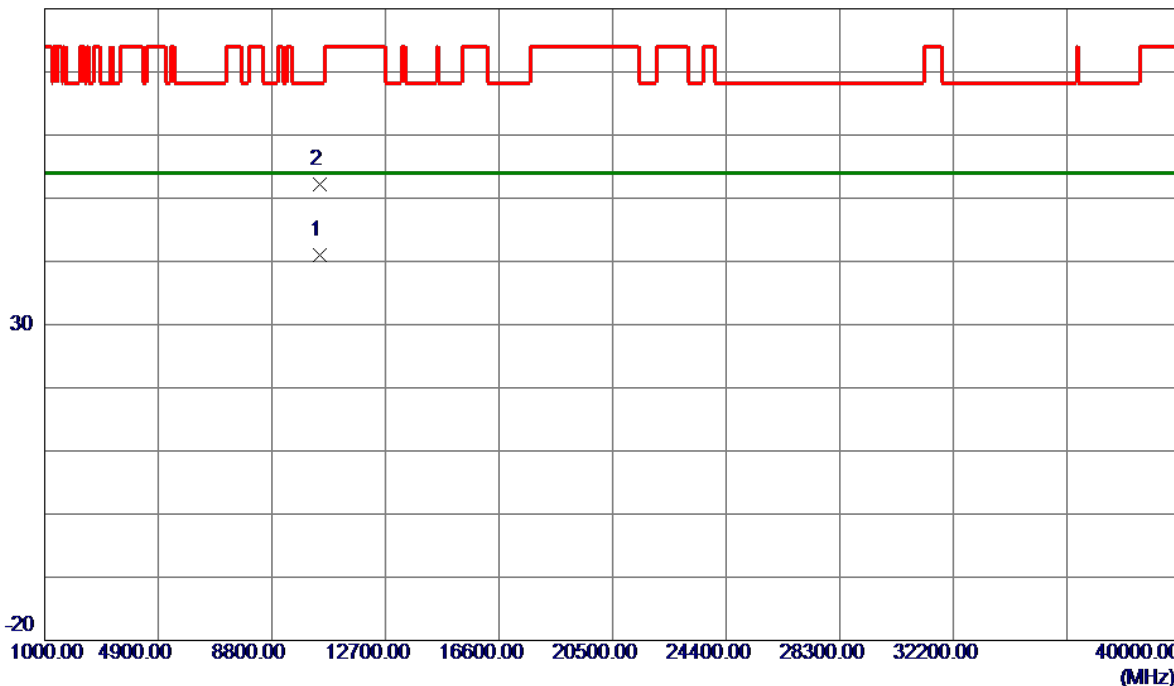


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.2000	27.52	13.54	41.06	54.00	-12.94	AVG	
2	10464.5400	38.56	13.55	52.11	68.20	-16.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

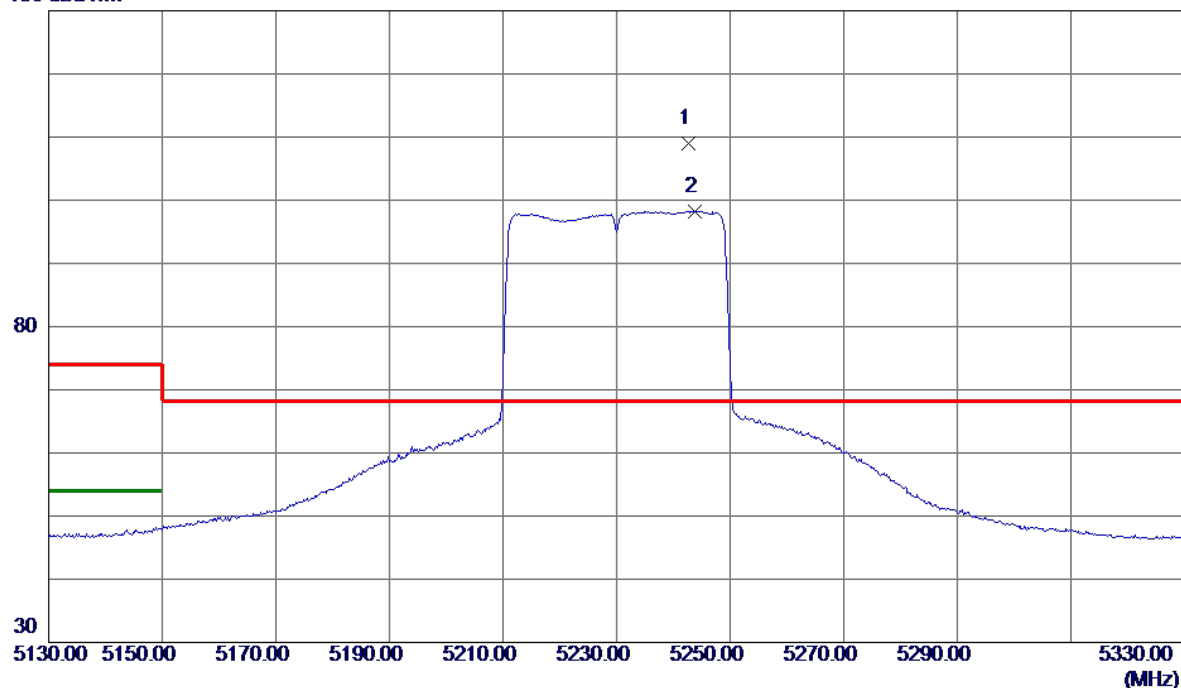


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5242.6000	92.52	16.38	108.90	68.20	40.70	Peak	No Limit
2	5243.8000	81.88	16.39	98.27	999.00	-900.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

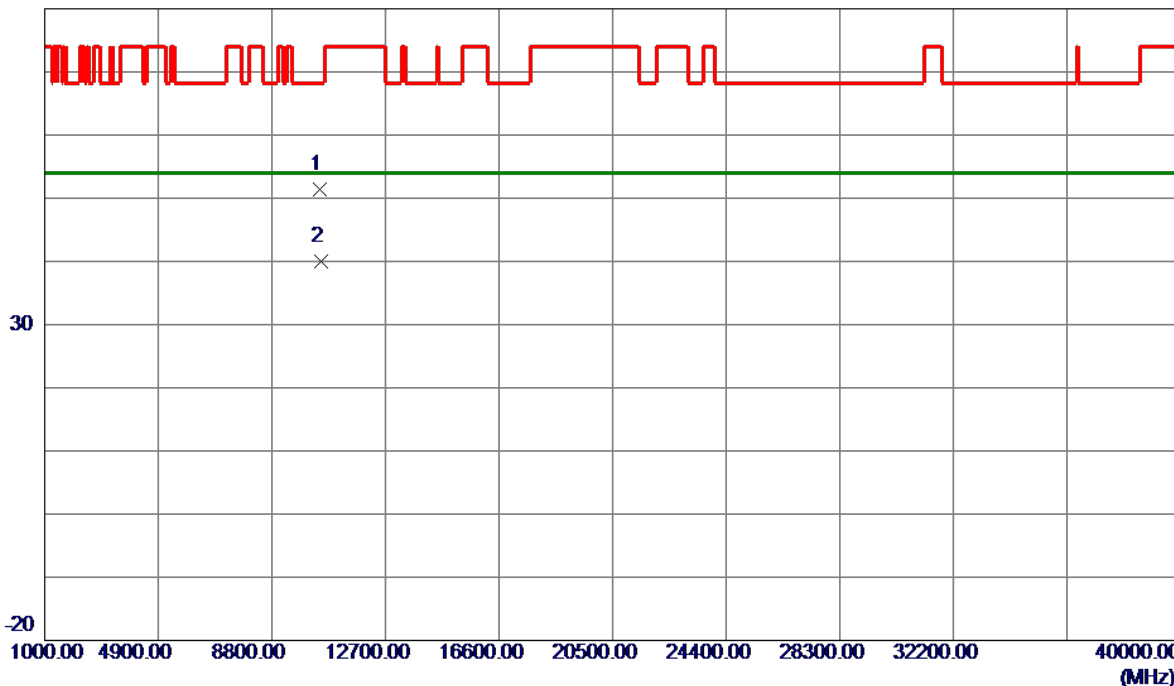


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.2000	37.87	13.54	51.41	68.20	-16.79	Peak	
2 *	10469.7000	26.48	13.55	40.03	54.00	-13.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

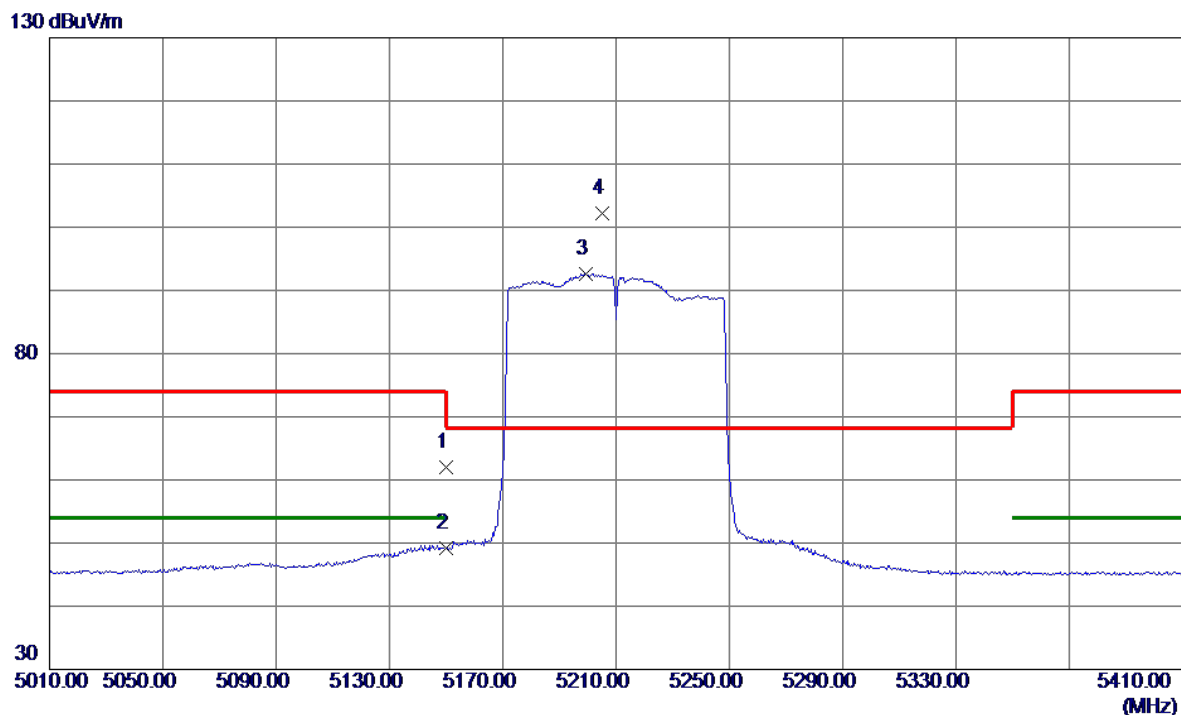


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.74	16.28	62.02	74.00	-11.98	Peak	
2	5150.0000	32.98	16.28	49.26	54.00	-4.74	AVG	
3	5199.2000	76.19	16.34	92.53	999.00	-906.47	AVG	No Limit
4 *	5205.2000	85.91	16.34	102.25	68.20	34.05	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

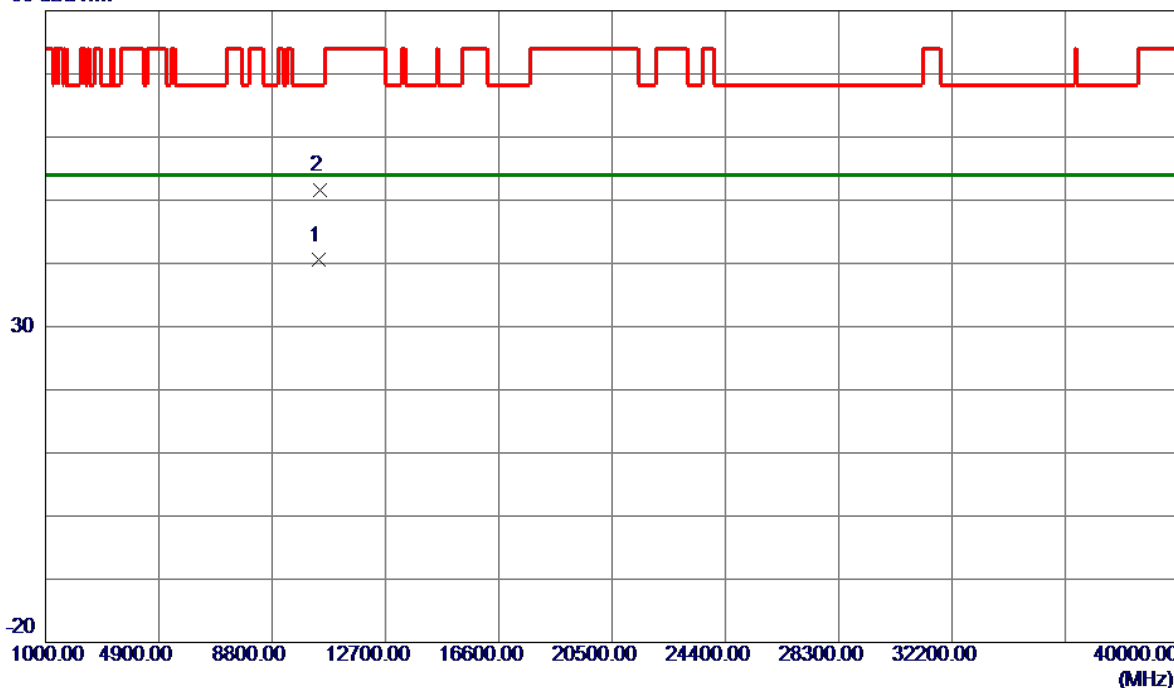


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10414.0199	27.00	13.50	40.50	54.00	-13.50	AVG	
2	10429.2000	38.06	13.52	51.58	68.20	-16.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

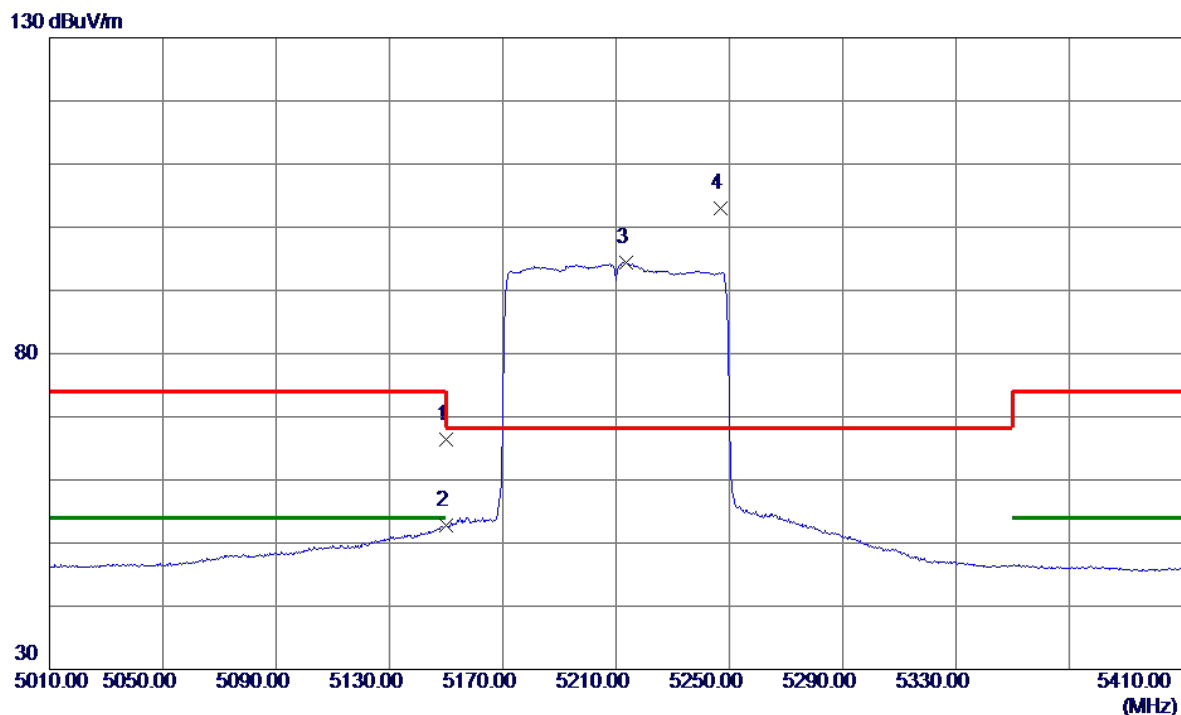


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	50.19	16.28	66.47	74.00	-7.53	Peak	
2	5150.0000	36.47	16.28	52.75	54.00	-1.25	AVG	
3	5213.6000	77.97	16.35	94.32	999.00	-904.68	AVG	No Limit
4 *	5246.8000	86.65	16.39	103.04	68.20	34.84	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

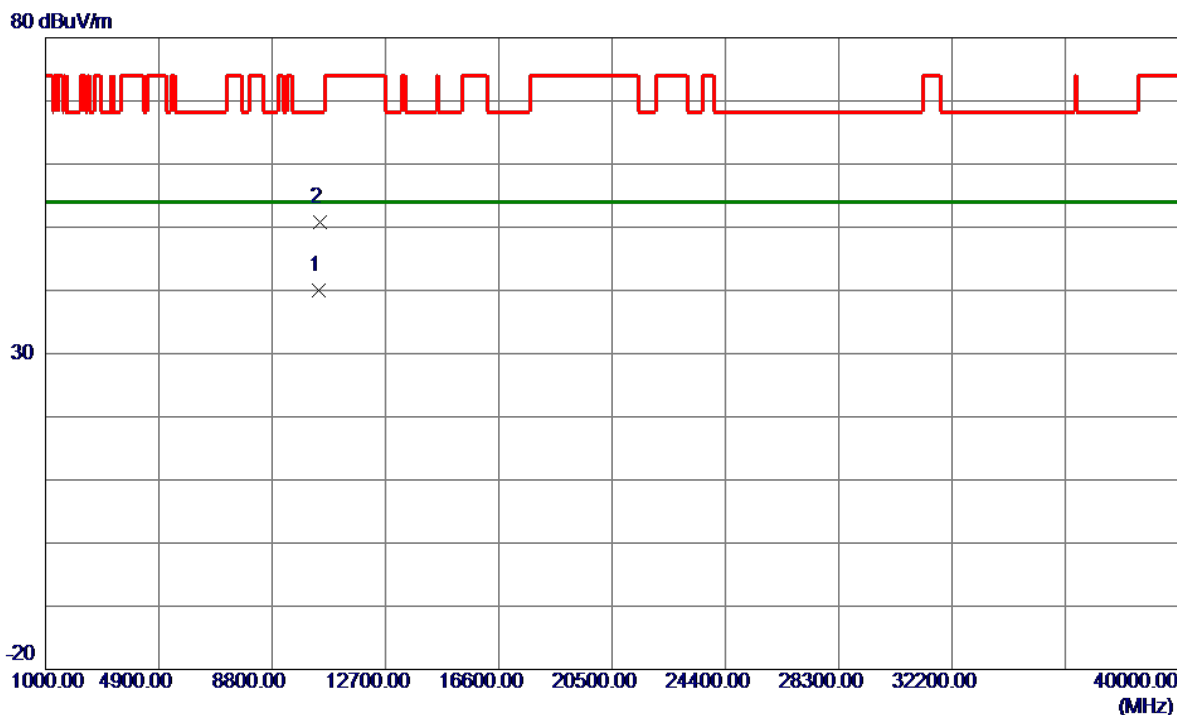


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.0800	26.45	13.51	39.96	54.00	-14.04	AVG	
2	10426.5800	37.30	13.51	50.81	68.20	-17.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

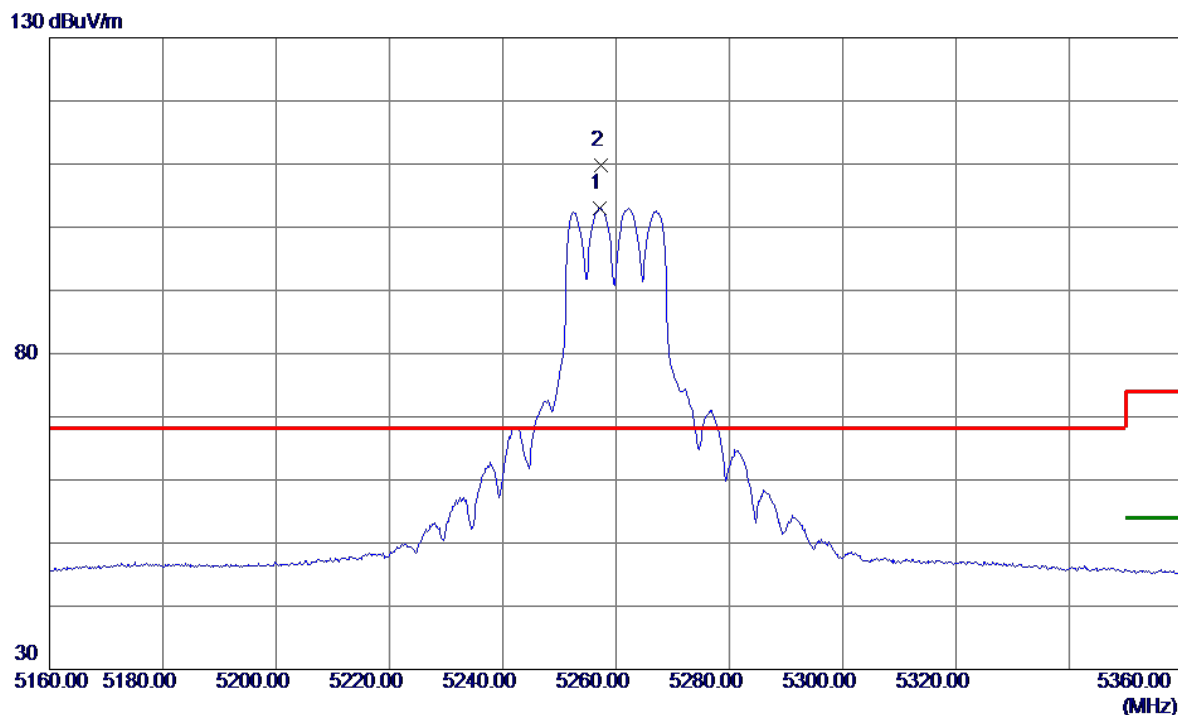


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.2000	87.54	15.51	103.05	999.00	-895.95	AVG	No Limit
2 *	5257.4000	94.37	15.51	109.88	68.20	41.68	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

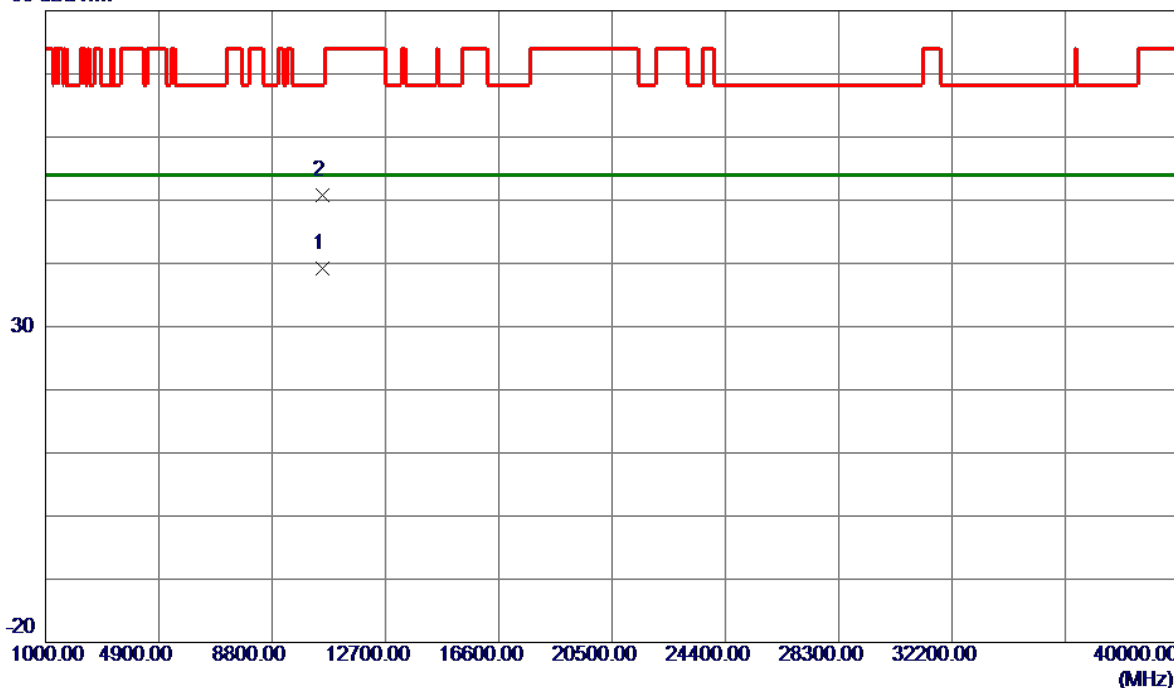


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.3750	26.86	12.39	39.25	54.00	-14.75	AVG	
2	10521.5850	38.41	12.39	50.80	68.20	-17.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

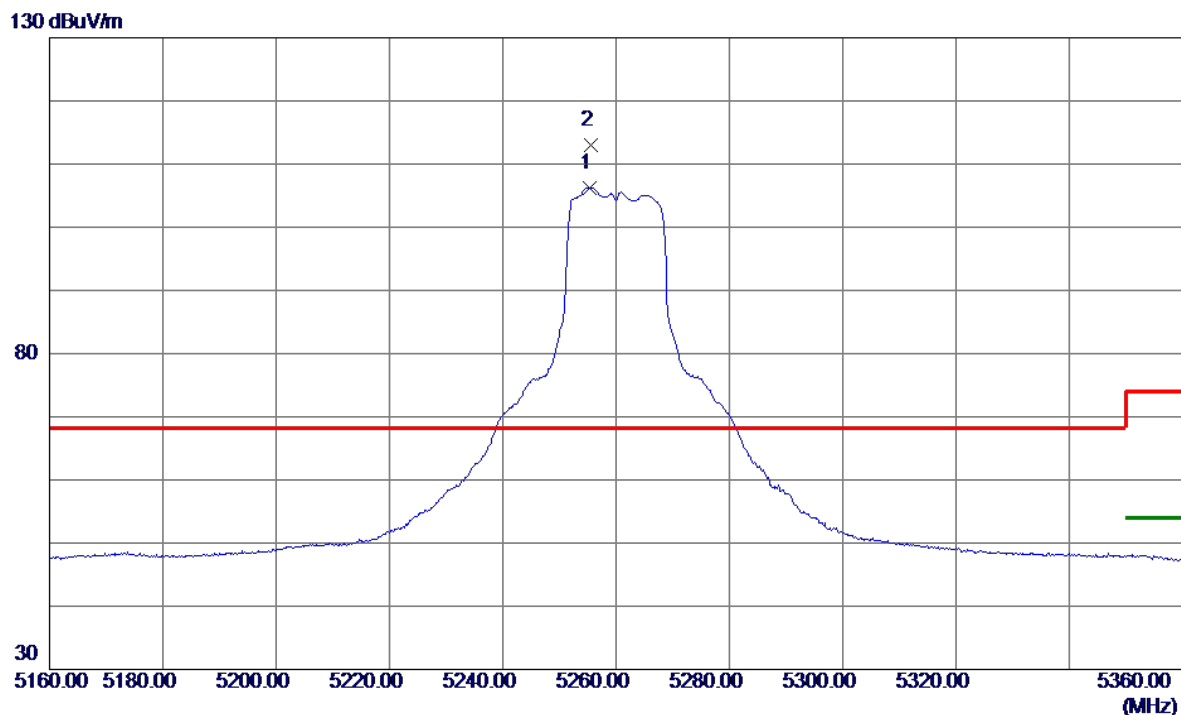


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.4000	90.76	15.50	106.26	999.00	-892.74	AVG	No Limit
2 *	5255.6000	97.42	15.51	112.93	68.20	44.73	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

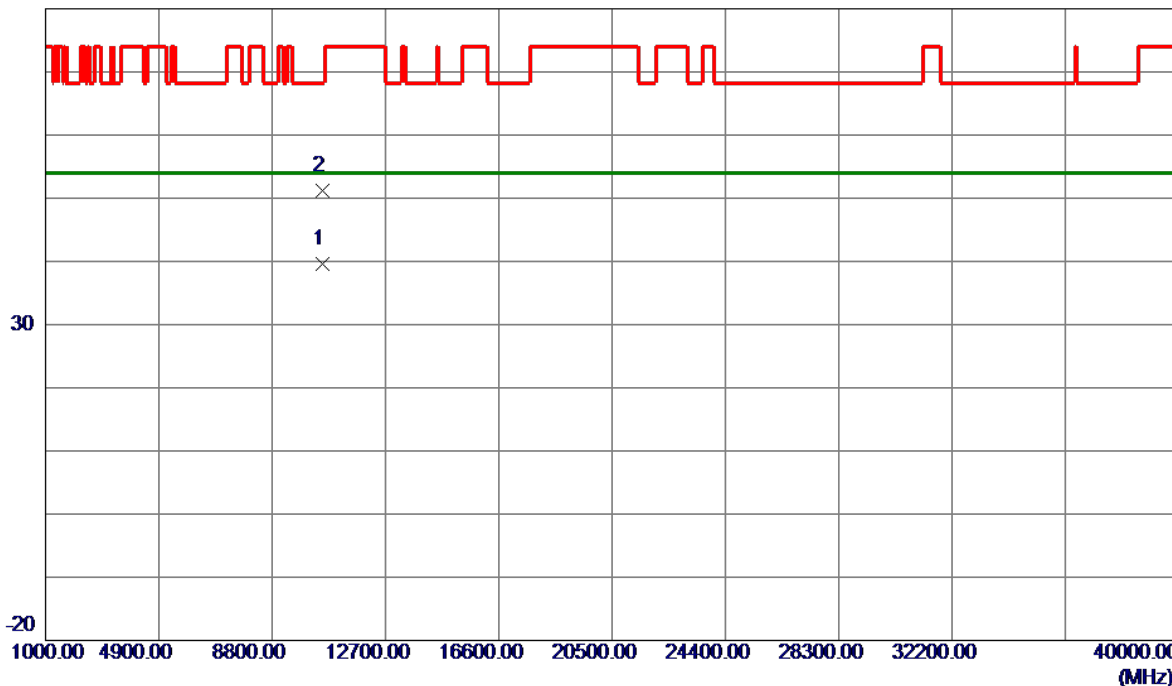


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.0199	27.16	12.39	39.55	54.00	-14.45	AVG	
2	10522.0150	38.80	12.39	51.19	68.20	-17.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

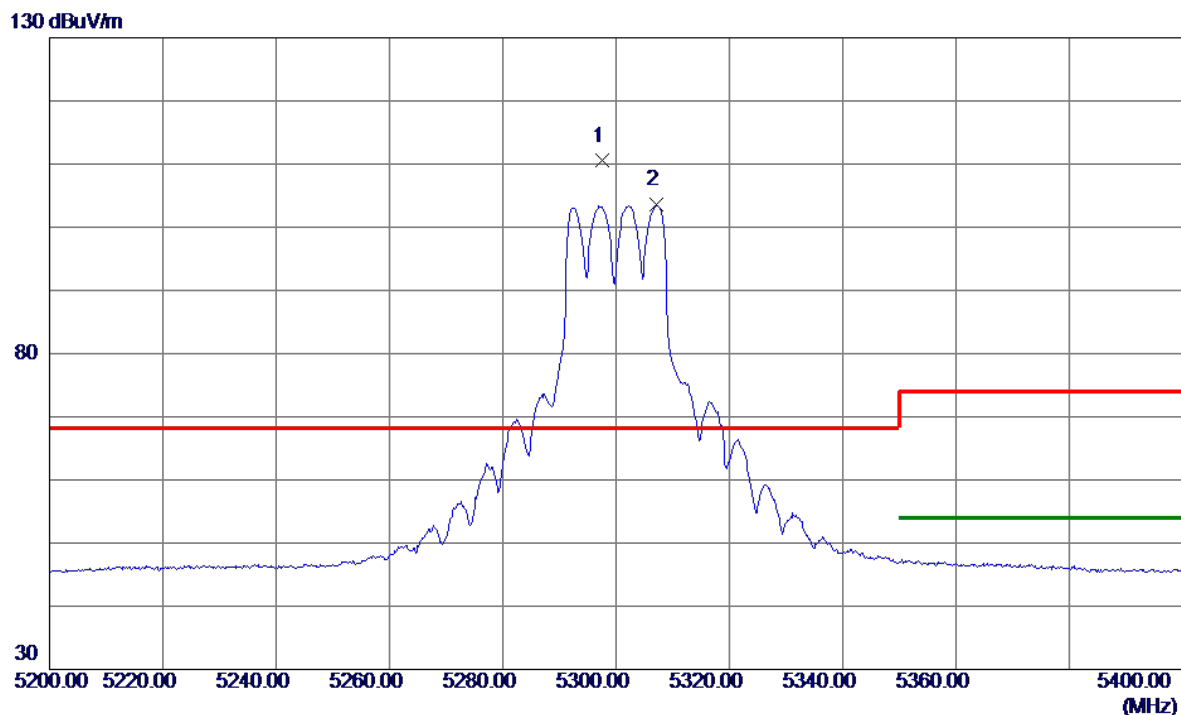


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5297.6000	94.90	15.60	110.50	68.20	42.30	Peak	No Limit
2	5307.2000	87.96	15.62	103.58	999.00	-895.42	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

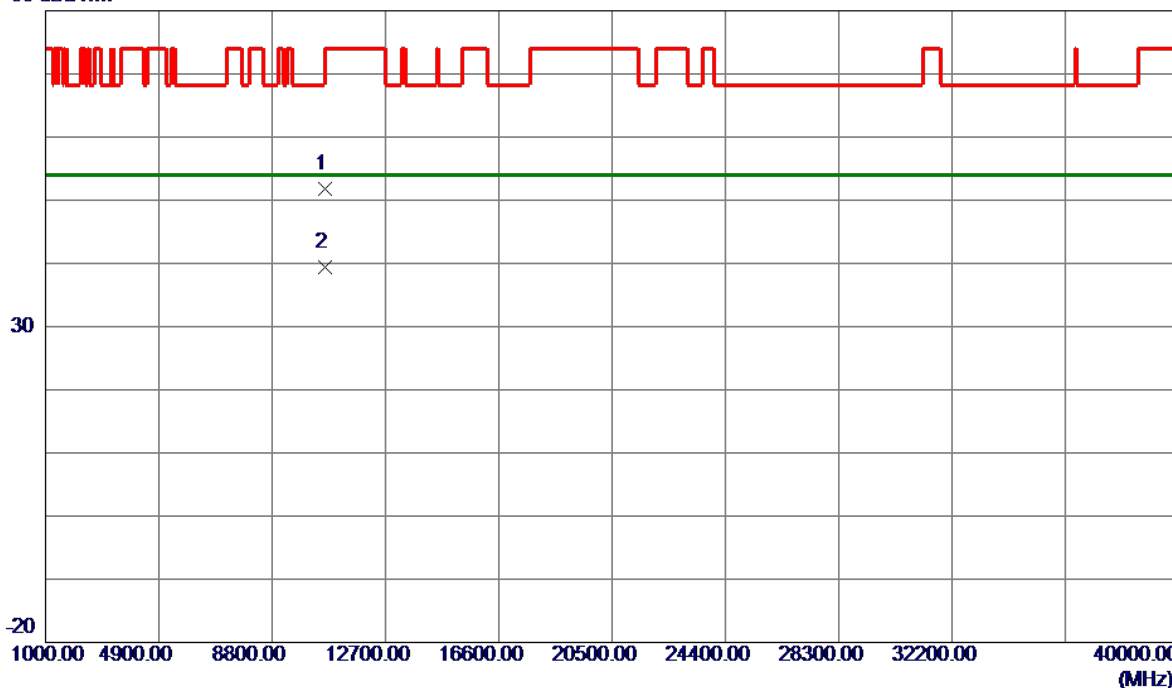


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10599.6500	39.35	12.46	51.81	68.20	-16.39	Peak	
2 *	10600.9900	26.99	12.46	39.45	54.00	-14.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

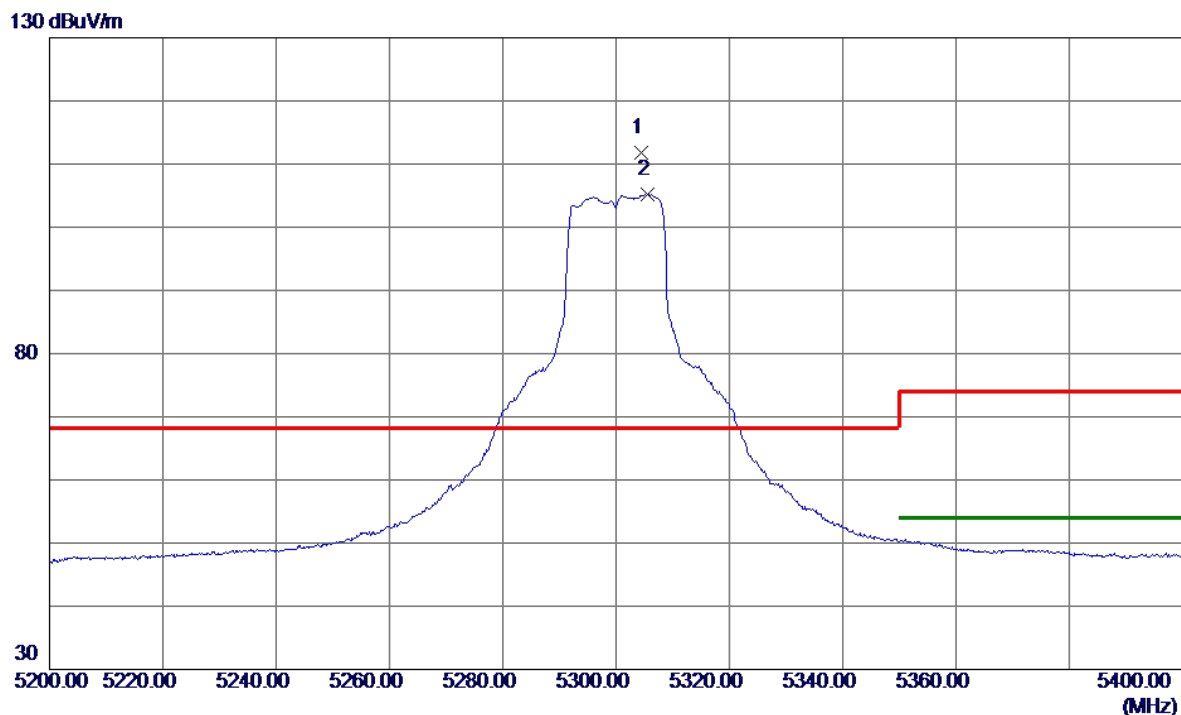


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5304.5000	96.21	15.62	111.83	68.20	43.63	Peak	No Limit
2	5305.6000	89.55	15.62	105.17	999.00	-893.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

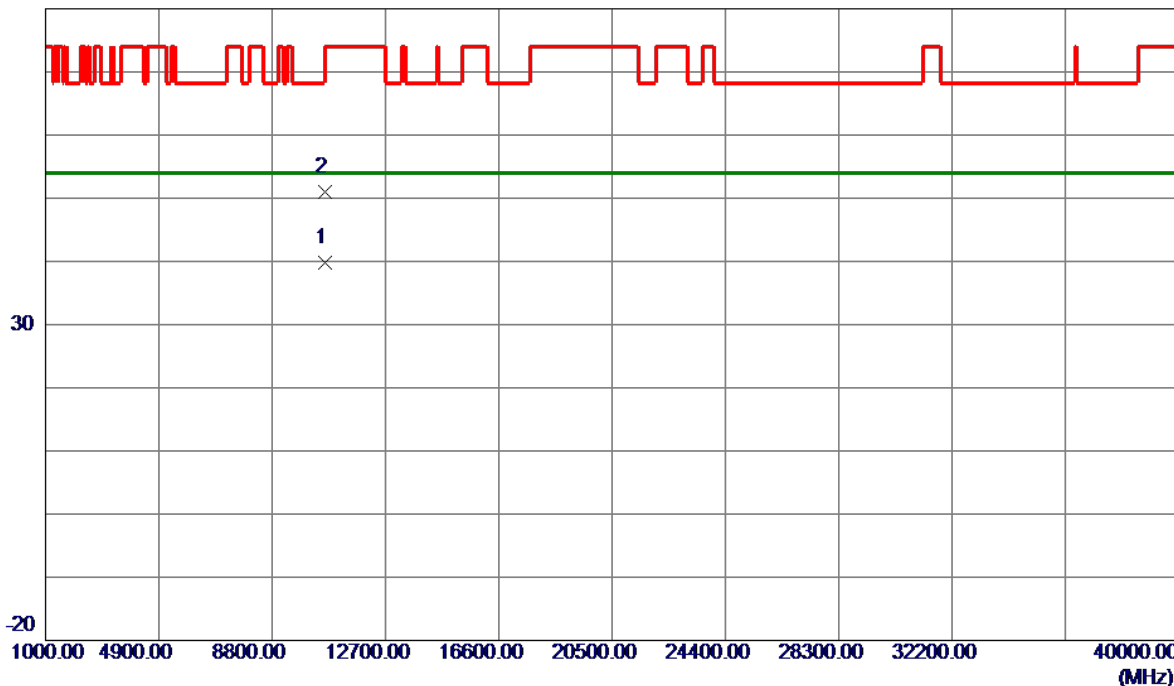


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.2300	27.41	12.46	39.87	54.00	-14.13	AVG	
2	10602.4850	38.55	12.46	51.01	74.00	-22.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

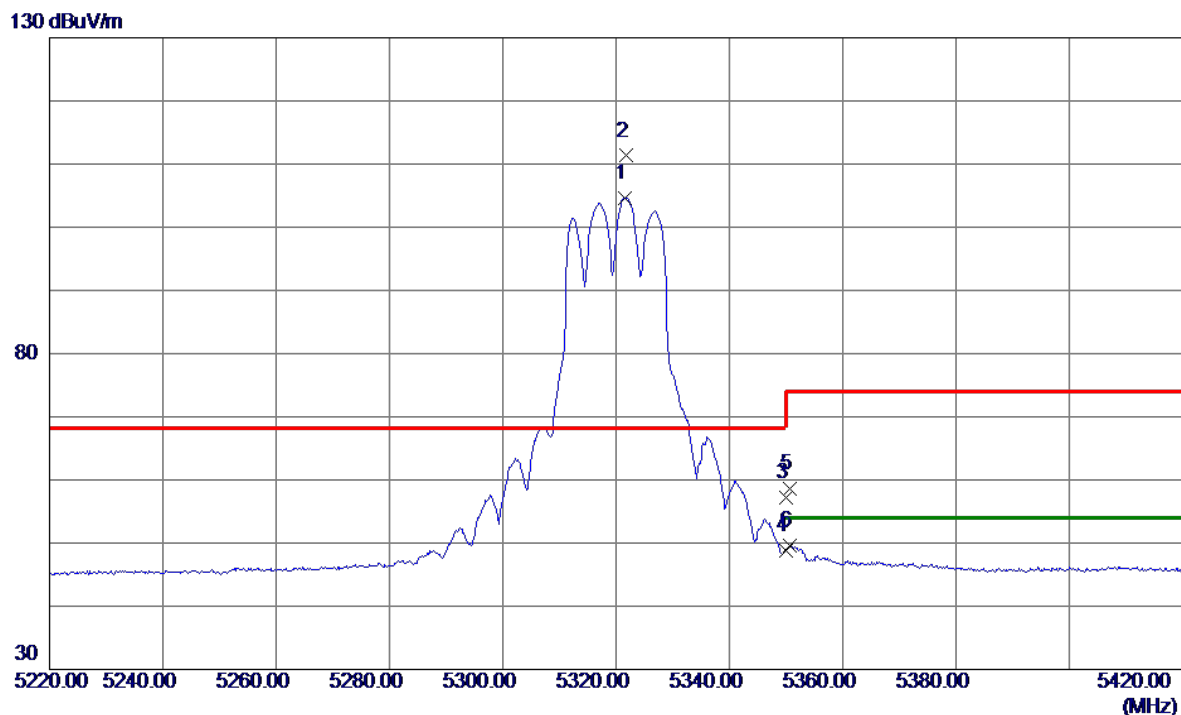


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5321.6000	89.03	15.66	104.69	999.00	-894.31	AVG	No Limit
2 *	5321.8000	95.64	15.66	111.30	68.20	43.10	Peak	No Limit
3	5350.0000	41.40	15.72	57.12	74.00	-16.88	Peak	
4	5350.0000	33.03	15.72	48.75	54.00	-5.25	AVG	
5	5350.6000	42.91	15.72	58.63	74.00	-15.37	Peak	
6	5350.6000	33.91	15.72	49.63	54.00	-4.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

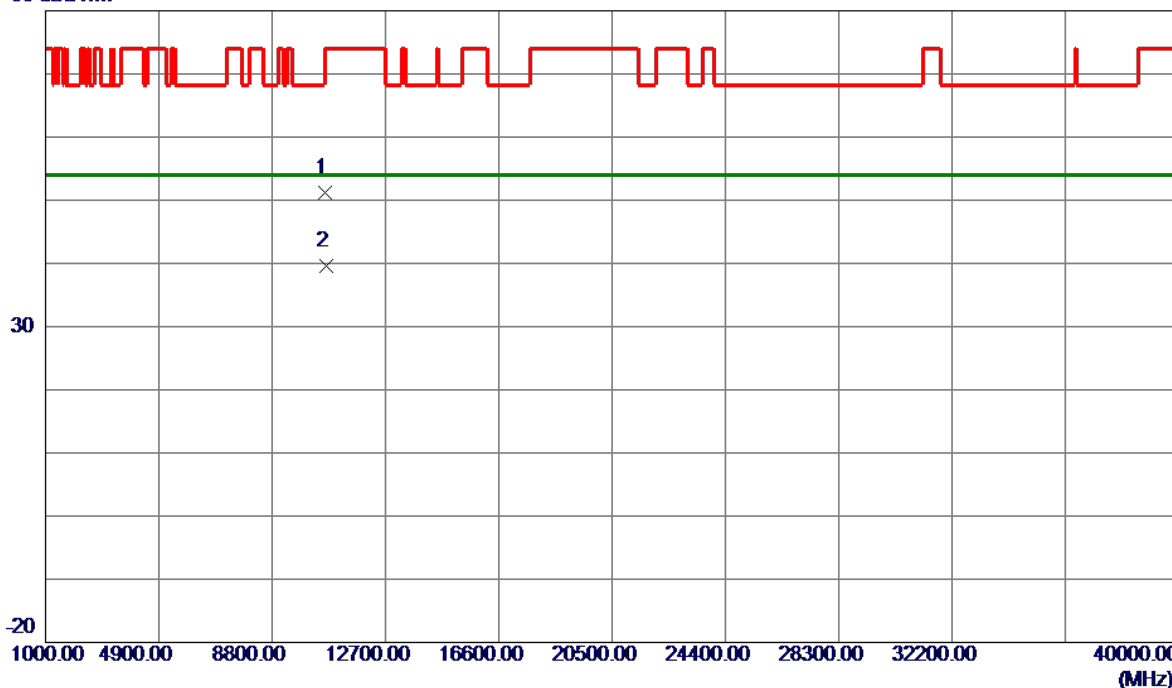


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10639.9000	38.78	12.49	51.27	74.00	-22.73	Peak	
2 *	10642.3250	27.13	12.49	39.62	54.00	-14.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

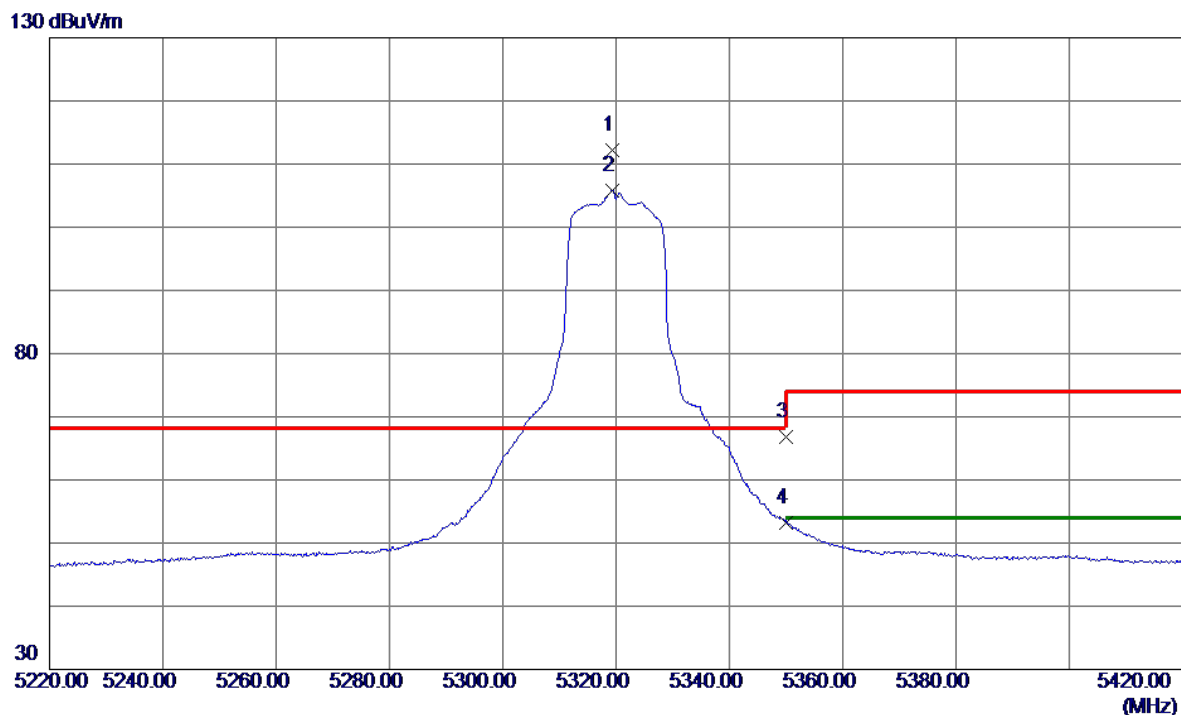


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5319.3000	96.49	15.65	112.14	68.20	43.94	Peak	No Limit
2	5319.3000	90.24	15.65	105.89	999.00	-893.11	AVG	No Limit
3	5350.0000	51.07	15.72	66.79	74.00	-7.21	Peak	
4	5350.0000	37.50	15.72	53.22	54.00	-0.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

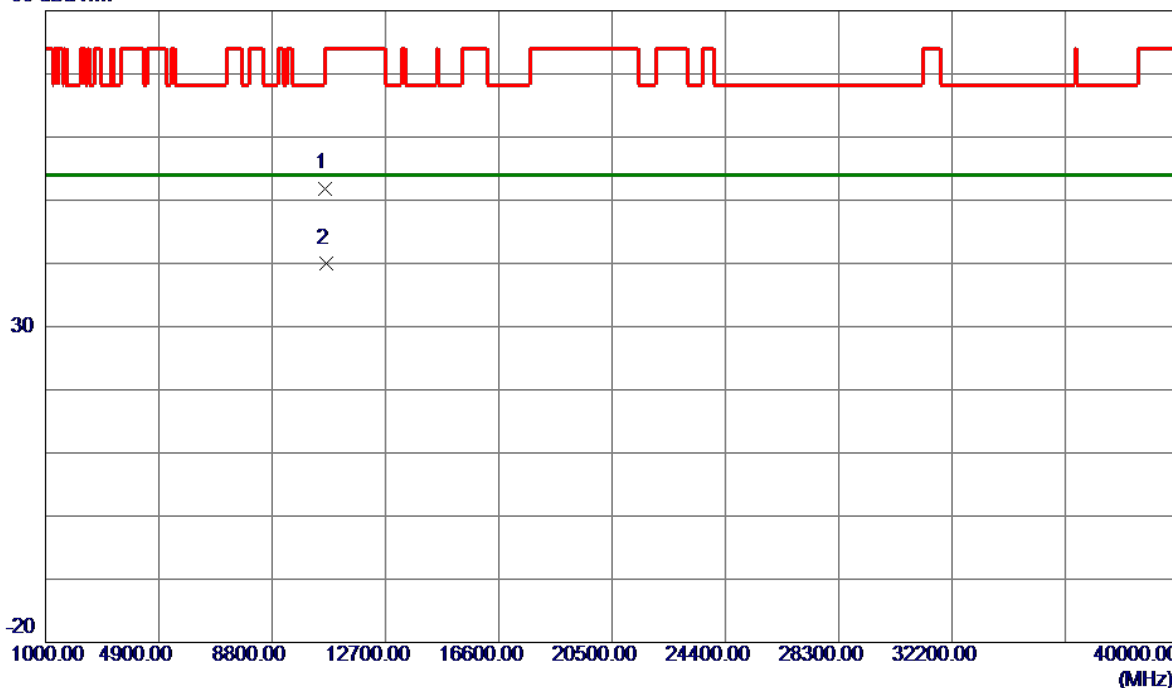


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10641.6600	39.41	12.49	51.90	74.00	-22.10	Peak	
2 *	10641.7650	27.50	12.49	39.99	54.00	-14.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

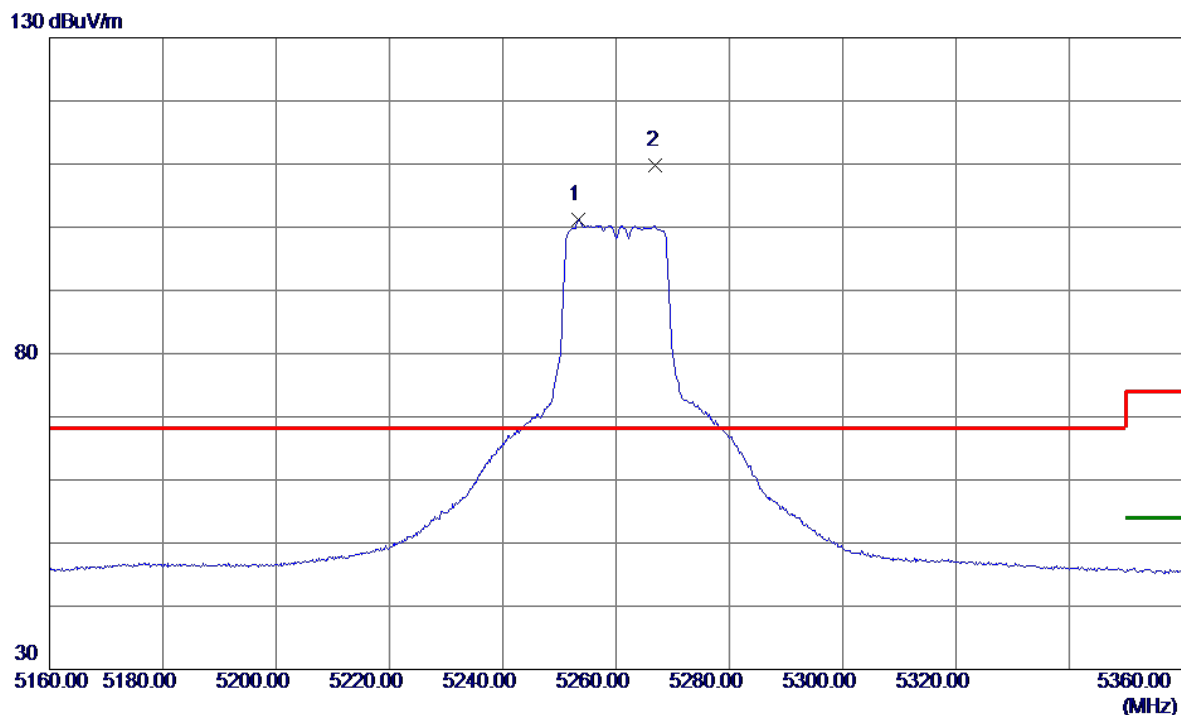


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5253.4000	85.78	15.50	101.28	999.00	-897.72	AVG	No Limit
2 *	5267.0000	94.23	15.53	109.76	68.20	41.56	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

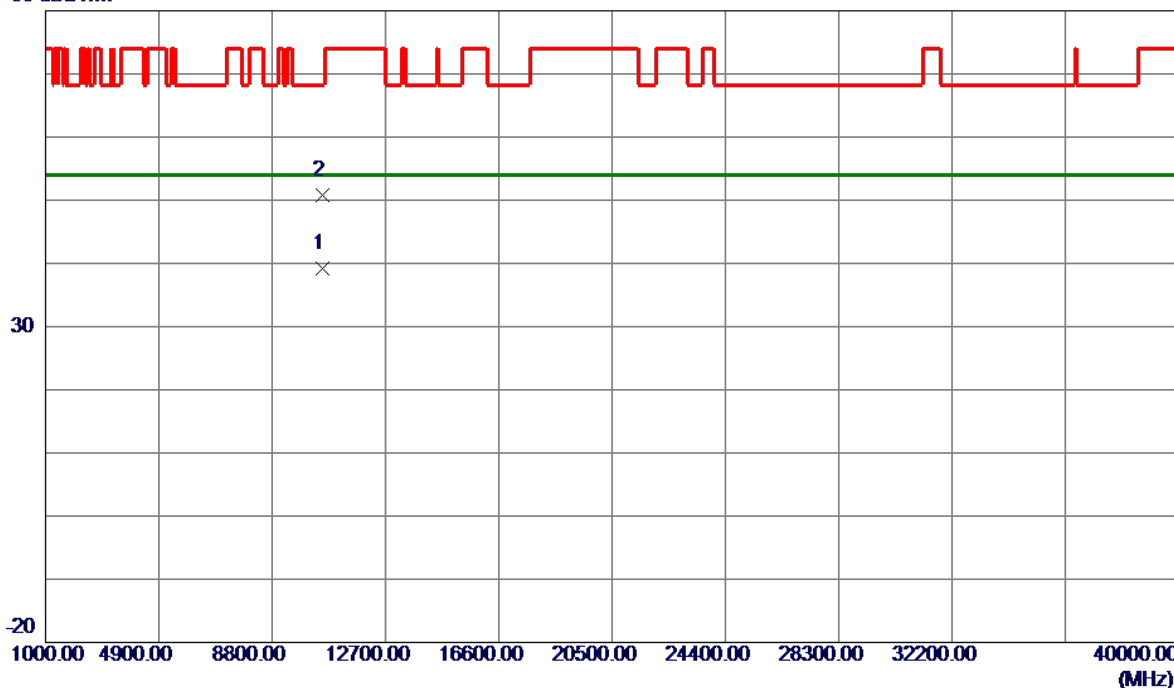


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.2900	26.86	12.39	39.25	54.00	-14.75	AVG	
2	10521.5000	38.33	12.39	50.72	68.20	-17.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

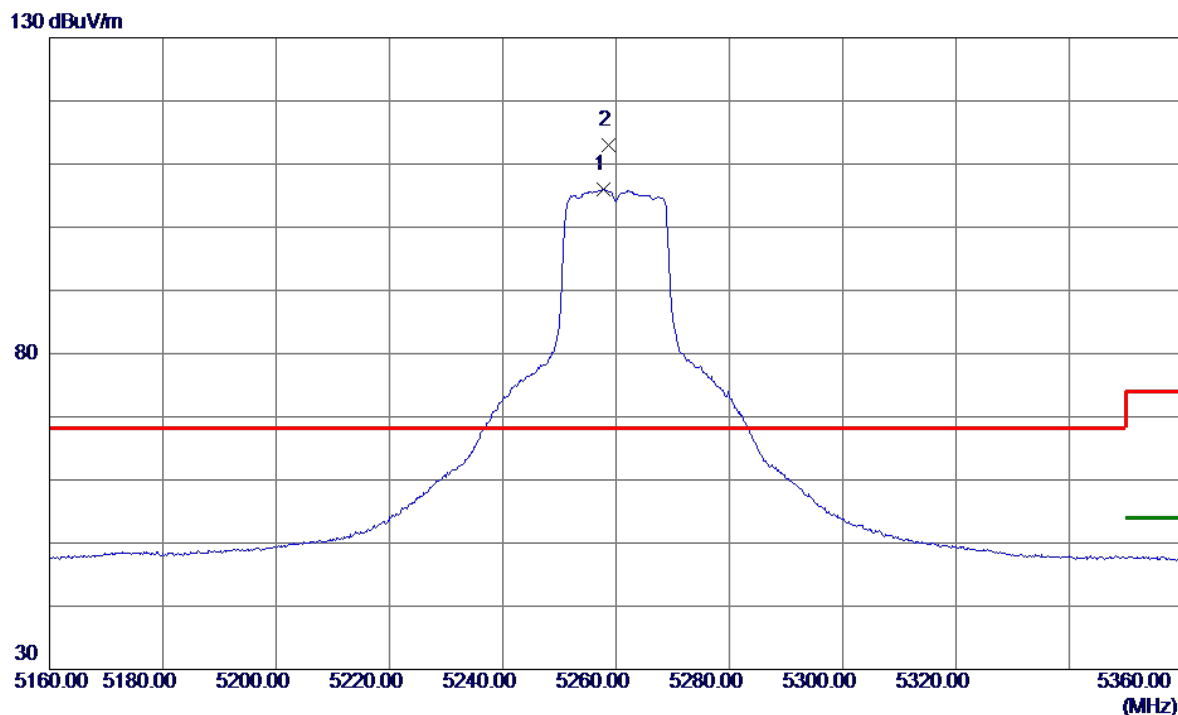


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.8000	90.47	15.51	105.98	999.00	-893.02	AVG	No Limit
2 *	5258.7000	97.50	15.51	113.01	68.20	44.81	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

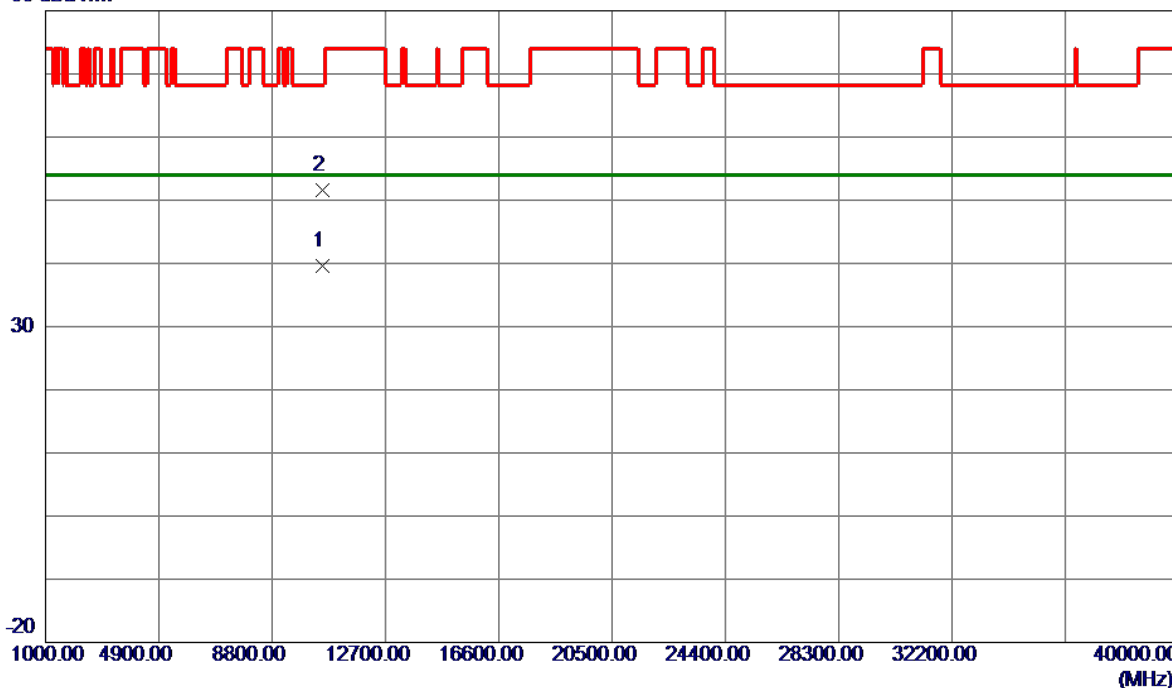


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.0550	27.22	12.39	39.61	54.00	-14.39	AVG	
2	10520.7350	39.23	12.39	51.62	68.20	-16.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

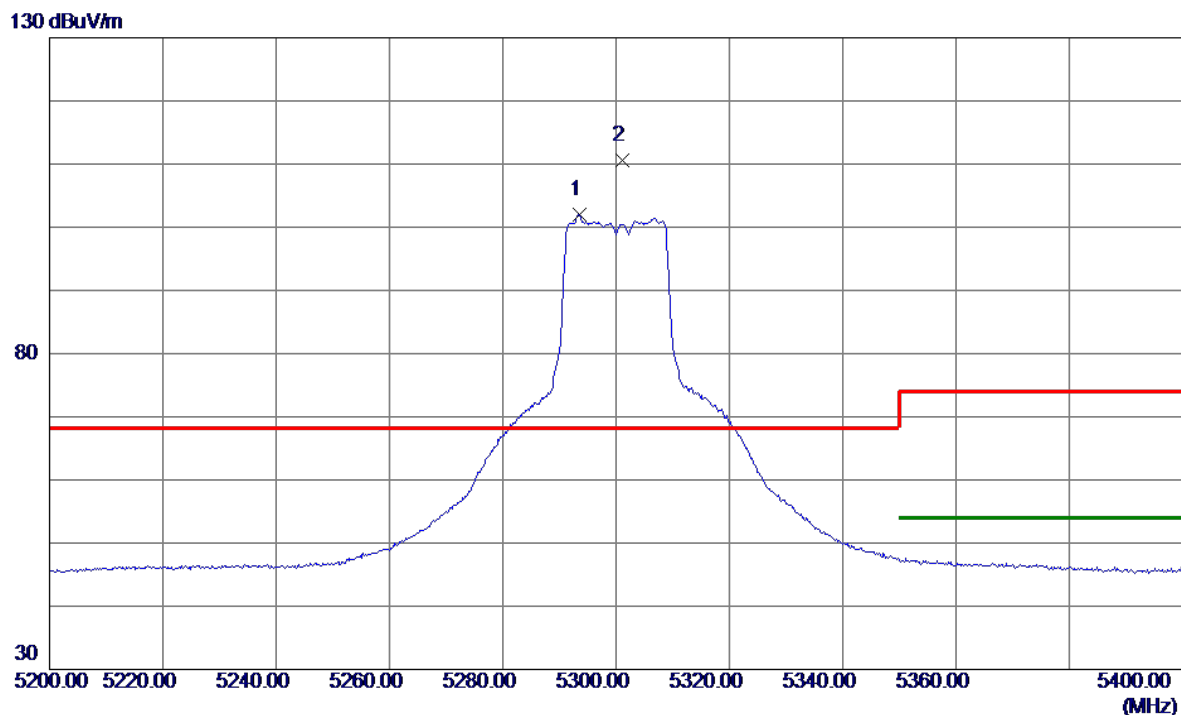


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.6000	86.33	15.59	101.92	999.00	-897.08	AVG	No Limit
2 *	5301.2000	95.06	15.61	110.67	68.20	42.47	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

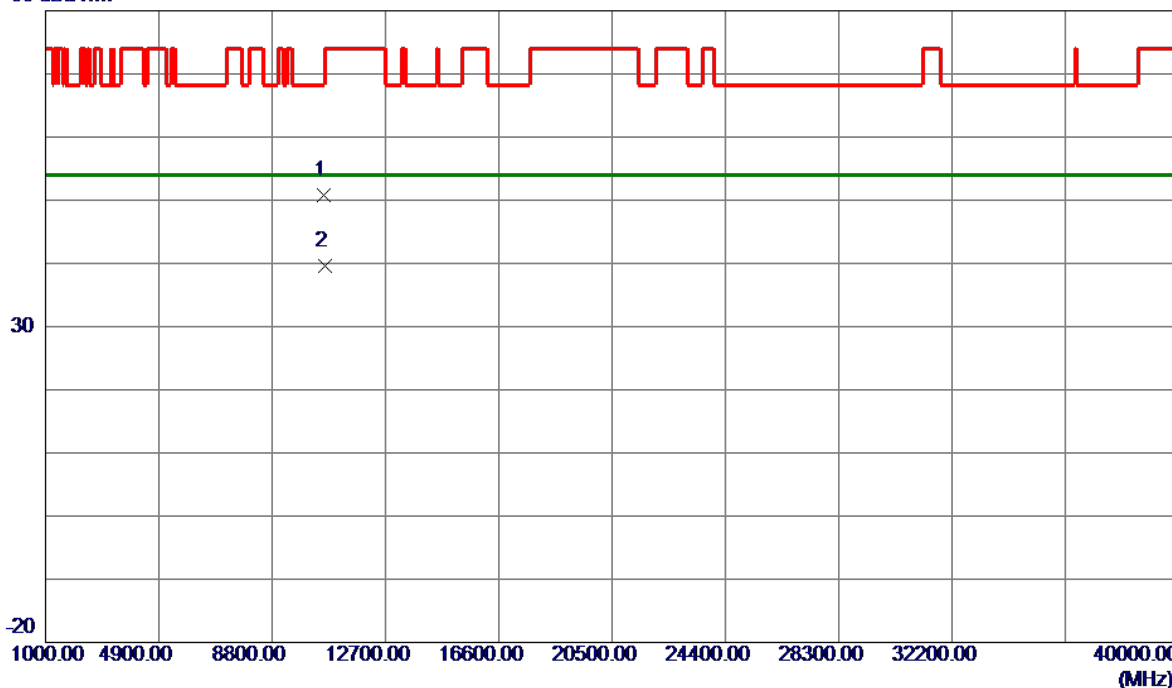


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10598.0650	38.39	12.45	50.84	68.20	-17.36	Peak	
2 *	10600.4500	27.05	12.46	39.51	54.00	-14.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

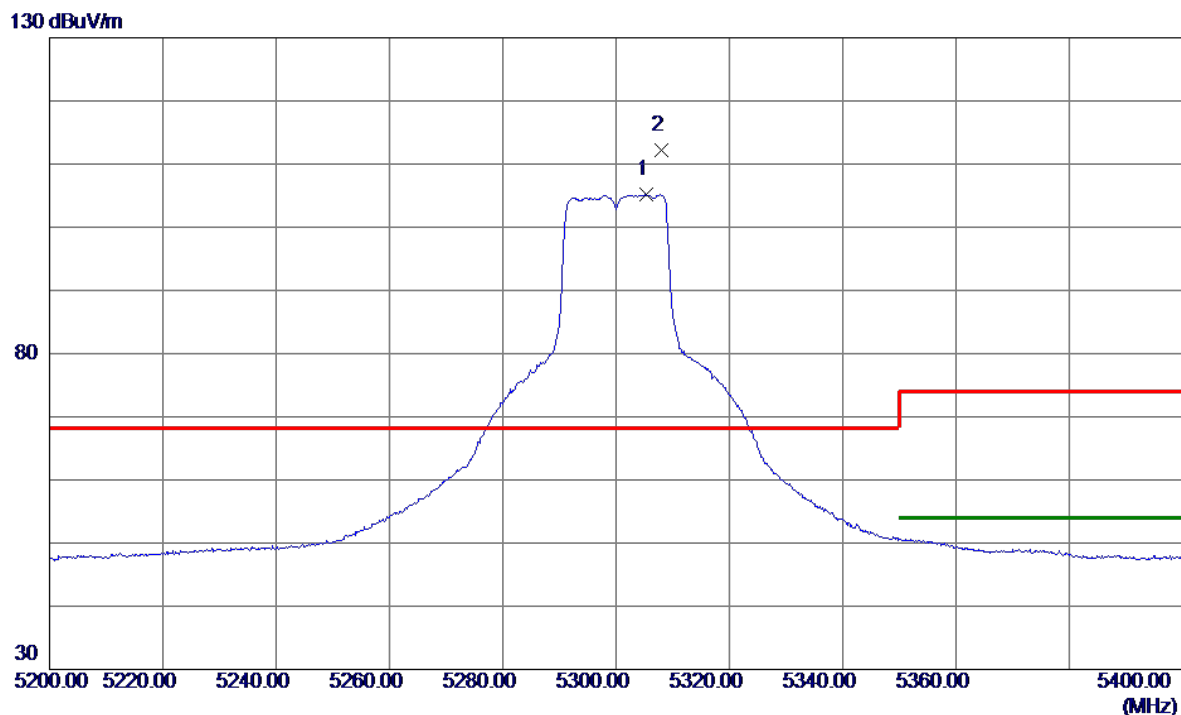


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5305.3000	89.57	15.62	105.19	999.00	-893.81	AVG	No Limit
2 *	5308.0000	96.64	15.63	112.27	68.20	44.07	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

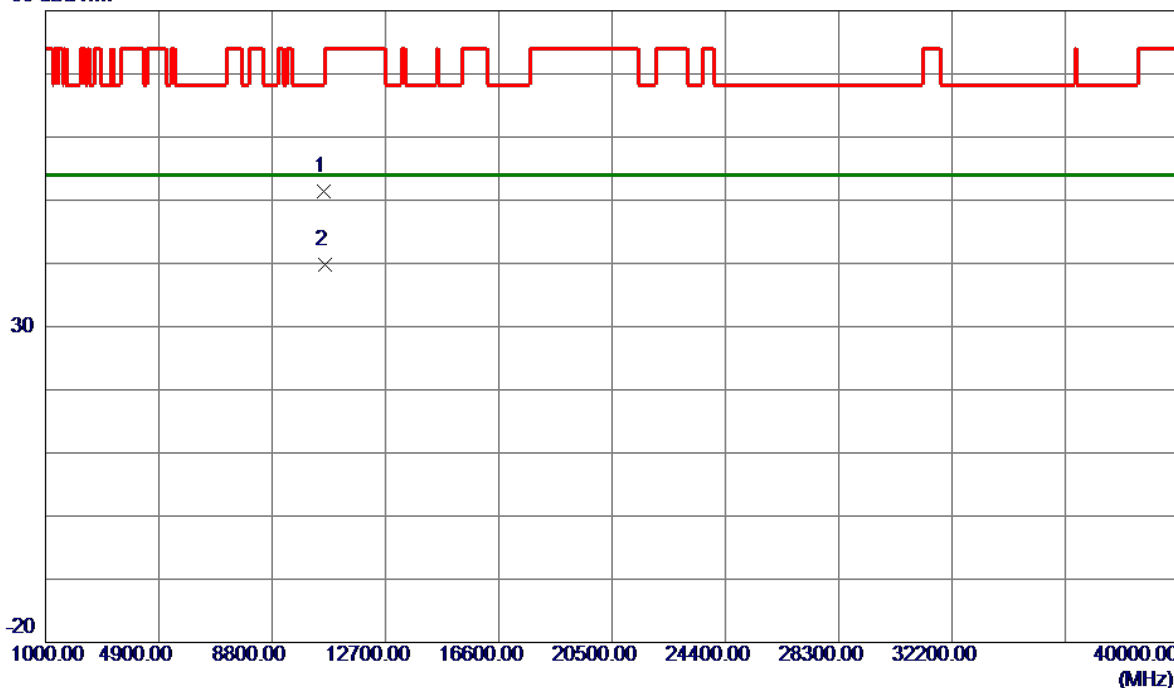


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10597.6400	38.86	12.45	51.31	68.20	-16.89	Peak	
2 *	10601.3150	27.41	12.46	39.87	54.00	-14.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

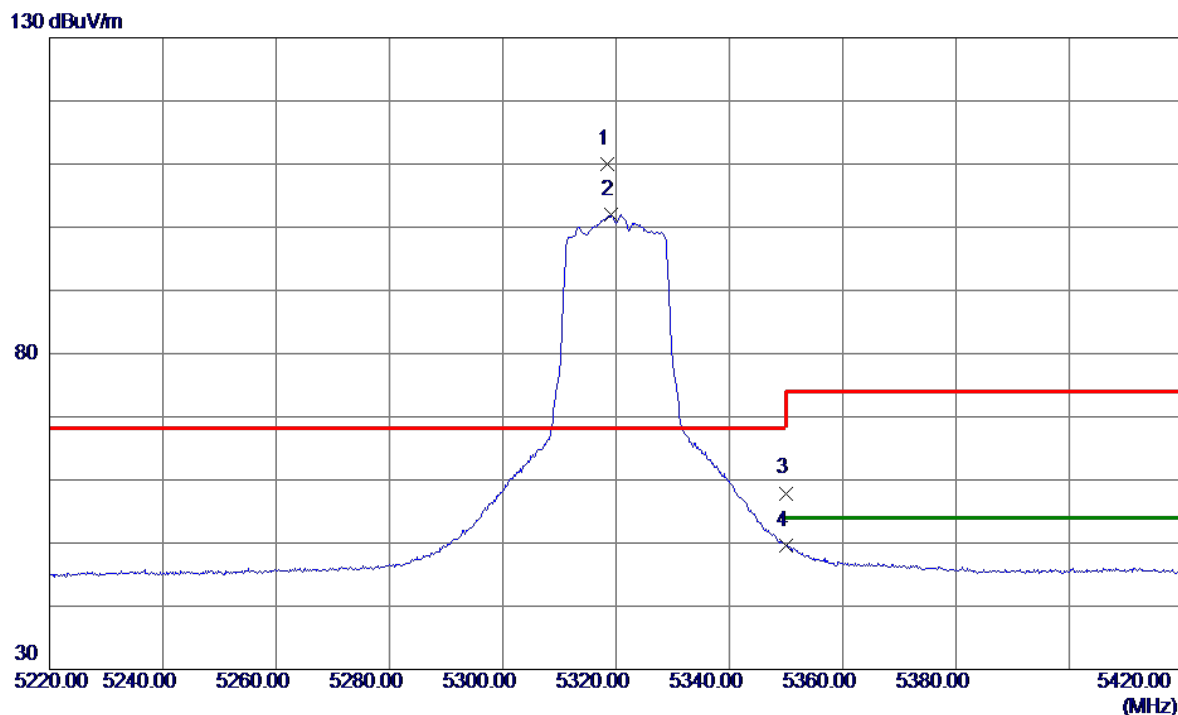


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.4000	94.27	15.65	109.92	68.20	41.72	Peak	No Limit
2	5319.2000	86.37	15.65	102.02	999.00	-896.98	AVG	No Limit
3	5350.0000	42.18	15.72	57.90	74.00	-16.10	Peak	
4	5350.0000	33.87	15.72	49.59	54.00	-4.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

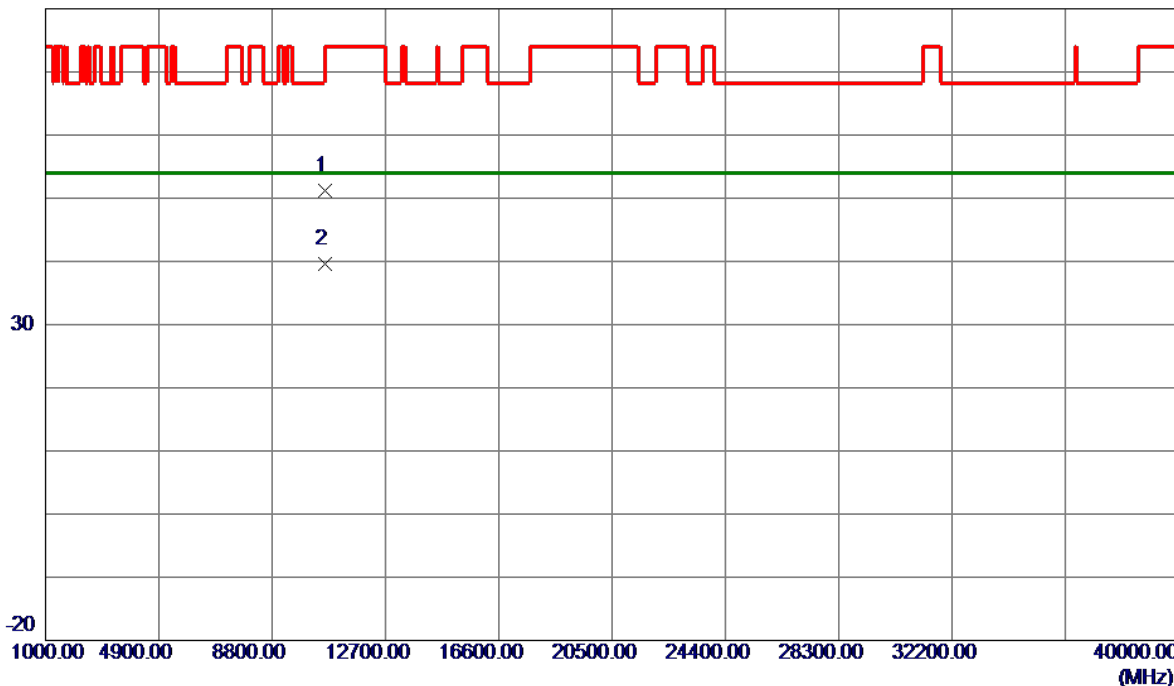


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10638.5300	38.68	12.49	51.17	74.00	-22.83	Peak	
2 *	10640.1950	27.13	12.49	39.62	54.00	-14.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

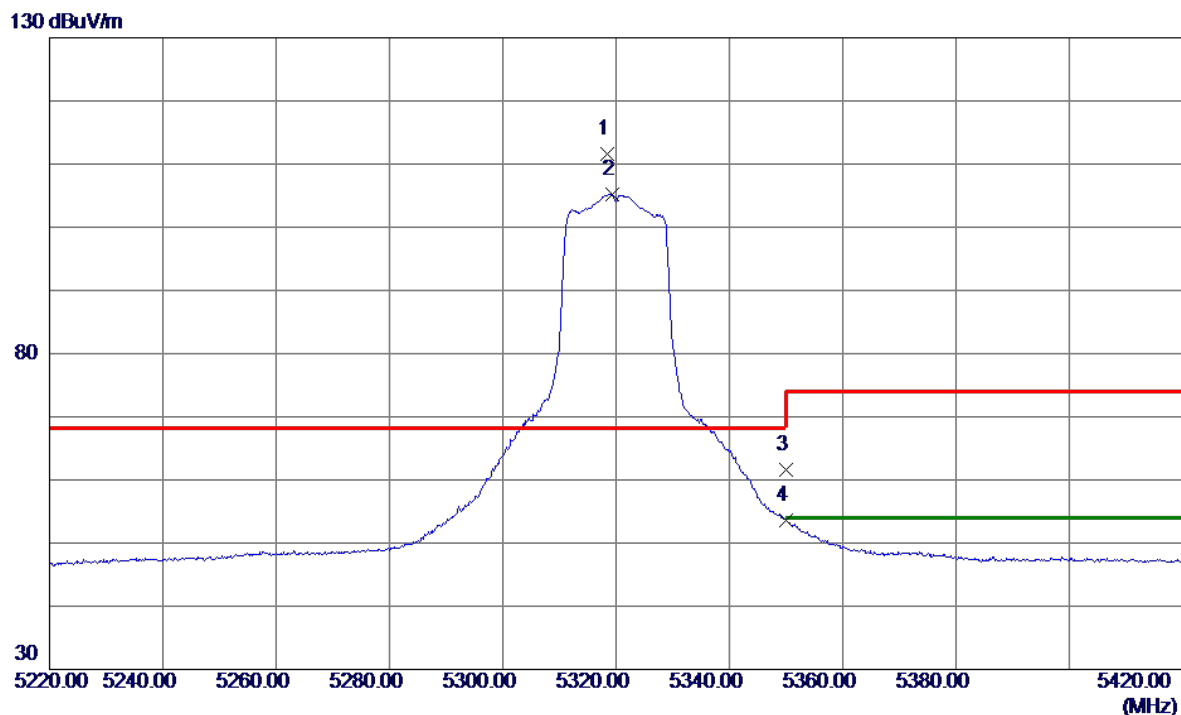


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.5000	96.04	15.65	111.69	68.20	43.49	Peak	No Limit
2	5319.3000	89.61	15.65	105.26	999.00	-893.74	AVG	No Limit
3	5350.0000	45.85	15.72	61.57	74.00	-12.43	Peak	
4	5350.0000	37.94	15.72	53.66	54.00	-0.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

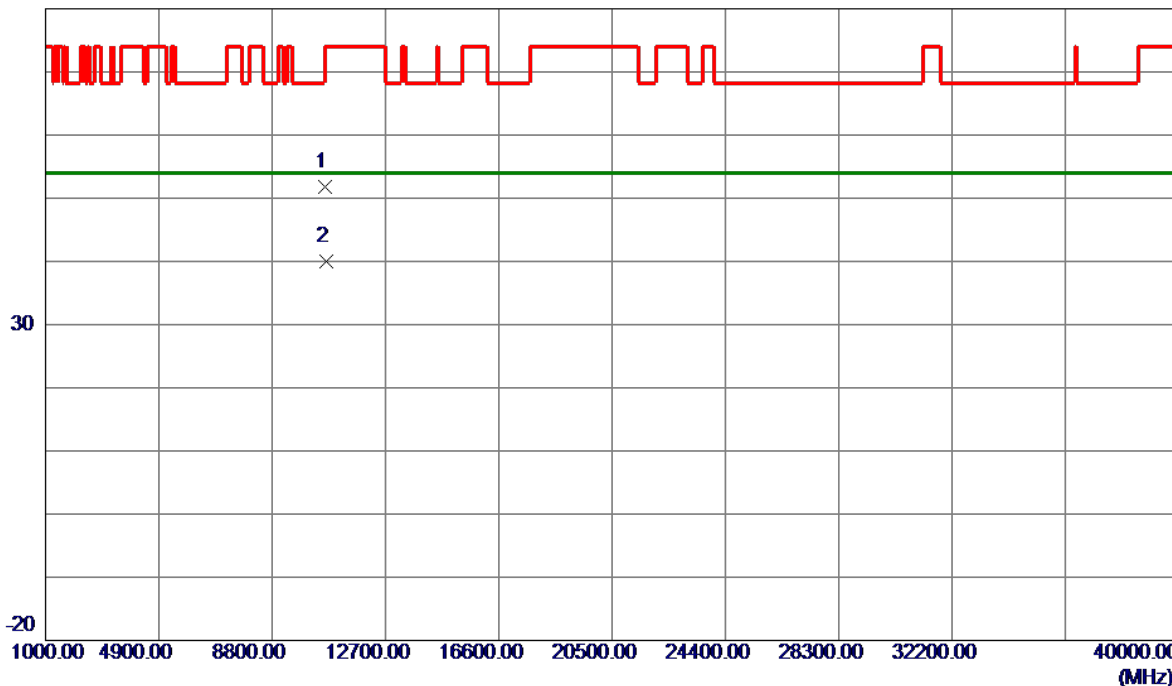


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10641.3700	39.37	12.49	51.86	74.00	-22.14	Peak	
2 *	10641.9050	27.45	12.49	39.94	54.00	-14.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

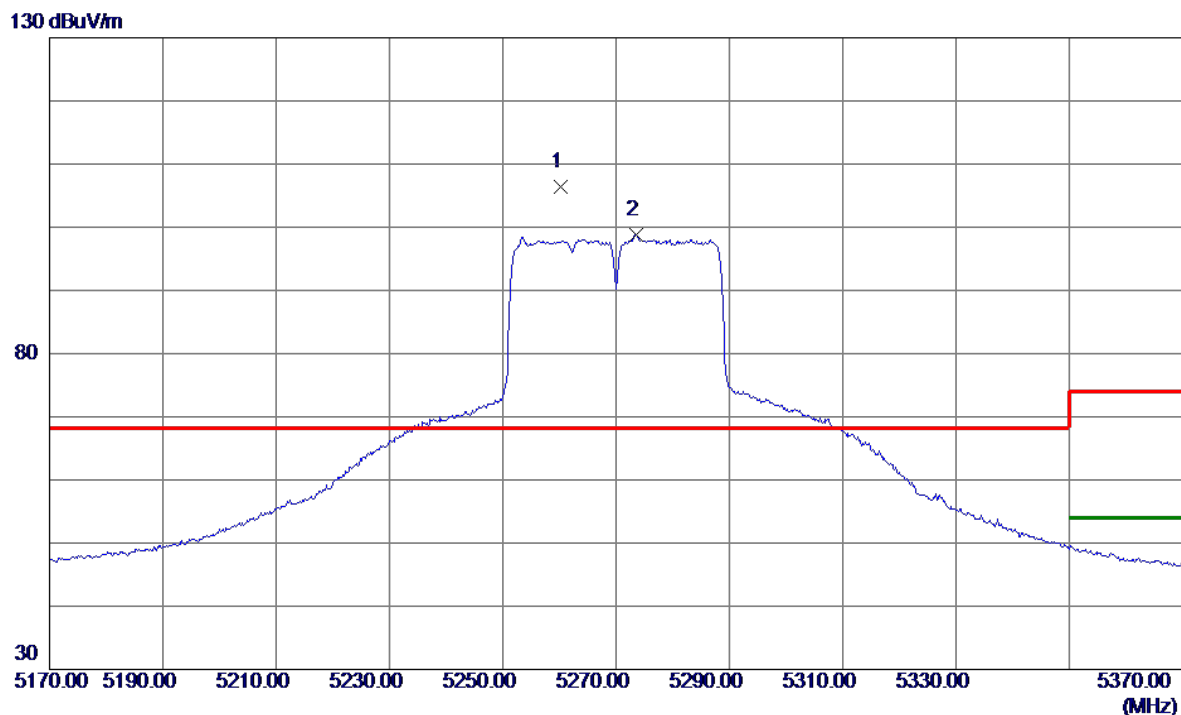


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5260.2000	90.94	15.52	106.46	68.20	38.26	Peak	No Limit
2	5273.6000	83.29	15.55	98.84	999.00	-900.16	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

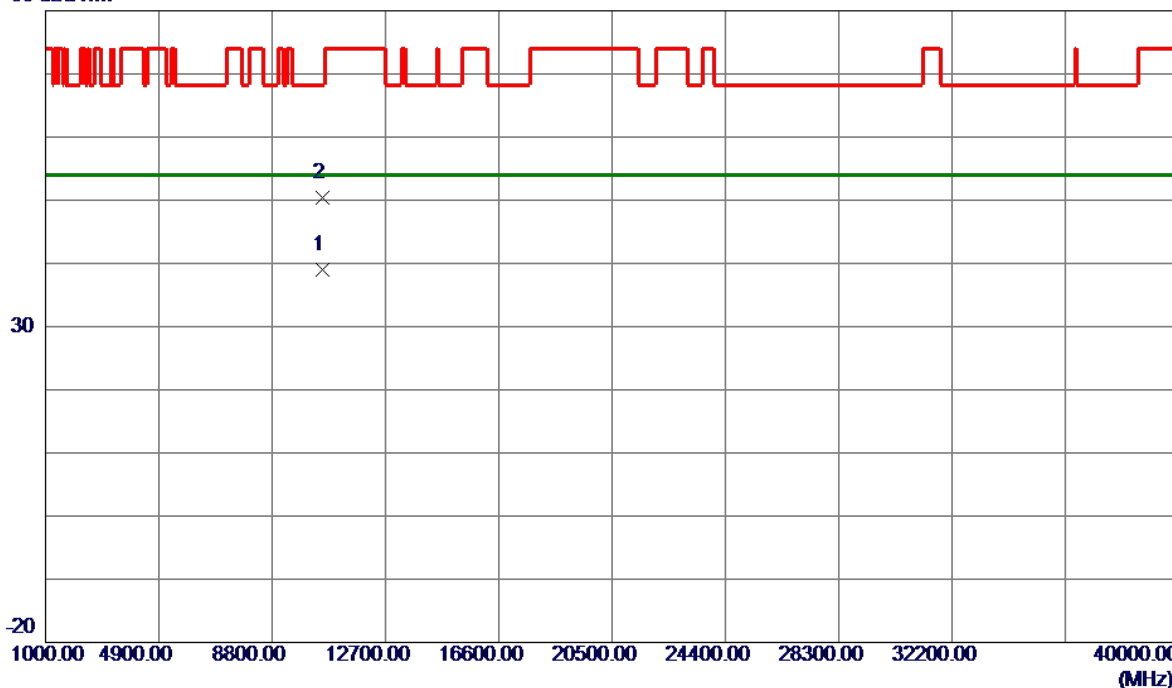


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.5350	26.59	12.41	39.00	54.00	-15.00	AVG	
2	10542.0599	38.01	12.41	50.42	68.20	-17.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

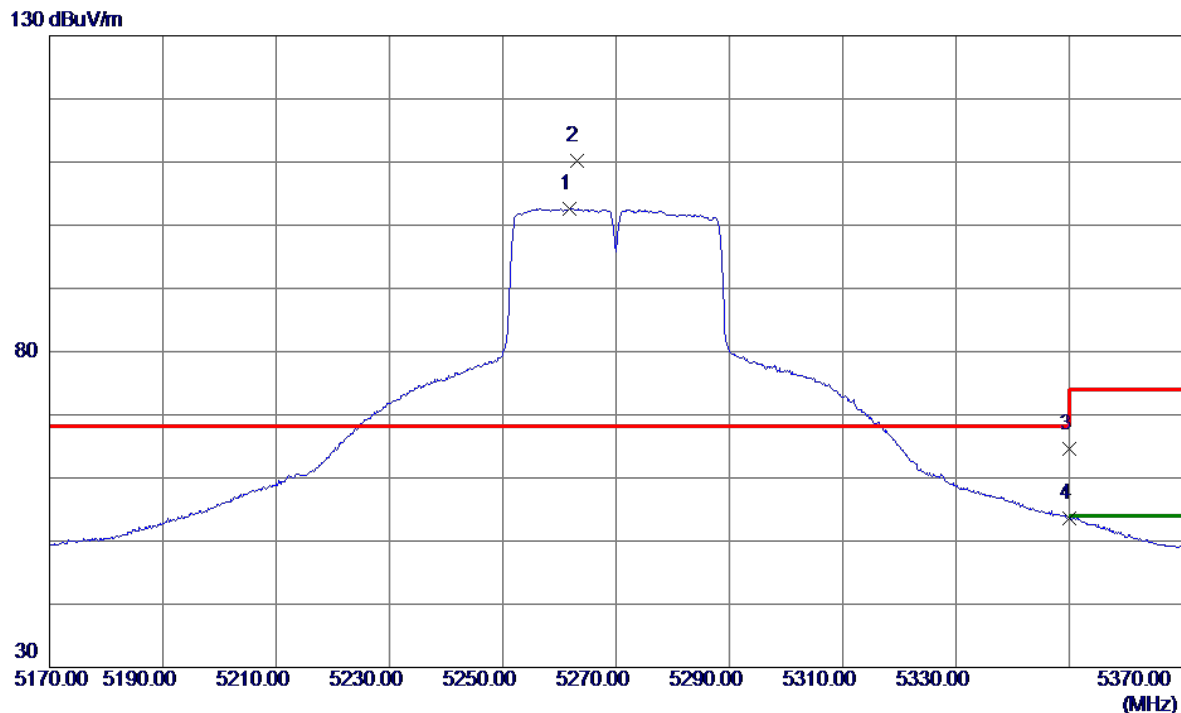


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5261.8000	87.07	15.52	102.59	999.00	-896.41	AVG	No Limit
2 *	5263.0000	94.69	15.52	110.21	68.20	42.01	Peak	No Limit
3	5350.0000	48.80	15.72	64.52	74.00	-9.48	Peak	
4	5350.0000	37.80	15.72	53.52	54.00	-0.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

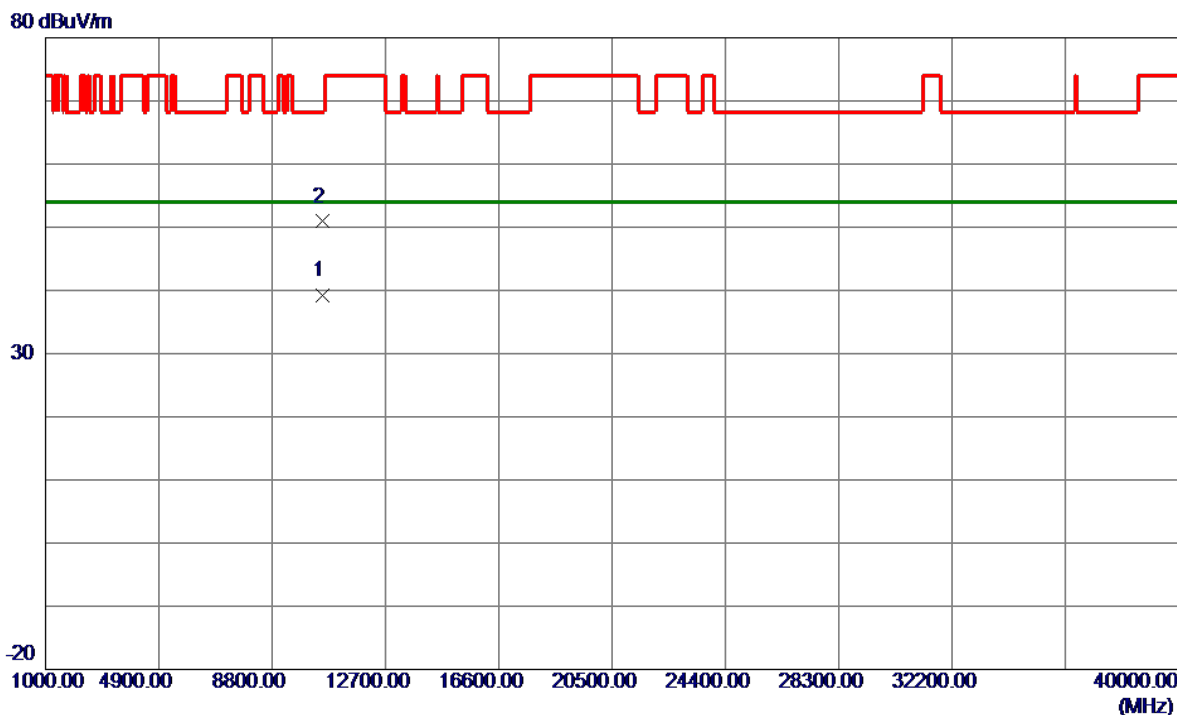


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.5950	26.78	12.41	39.19	54.00	-14.81	AVG	
2	10542.2250	38.49	12.41	50.90	68.20	-17.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

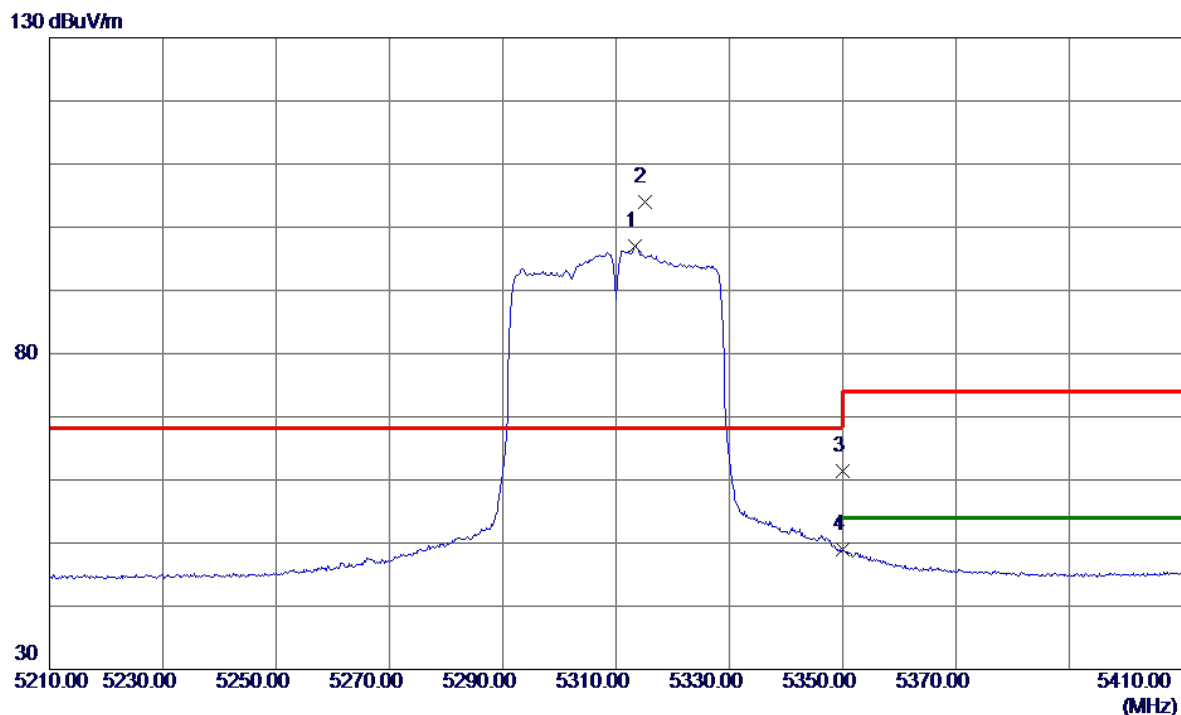


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5313.4000	81.32	15.64	96.96	999.00	-902.04	AVG	No Limit
2 *	5315.0000	88.37	15.64	104.01	68.20	35.81	Peak	No Limit
3	5350.0000	45.71	15.72	61.43	74.00	-12.57	Peak	
4	5350.0000	33.22	15.72	48.94	54.00	-5.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

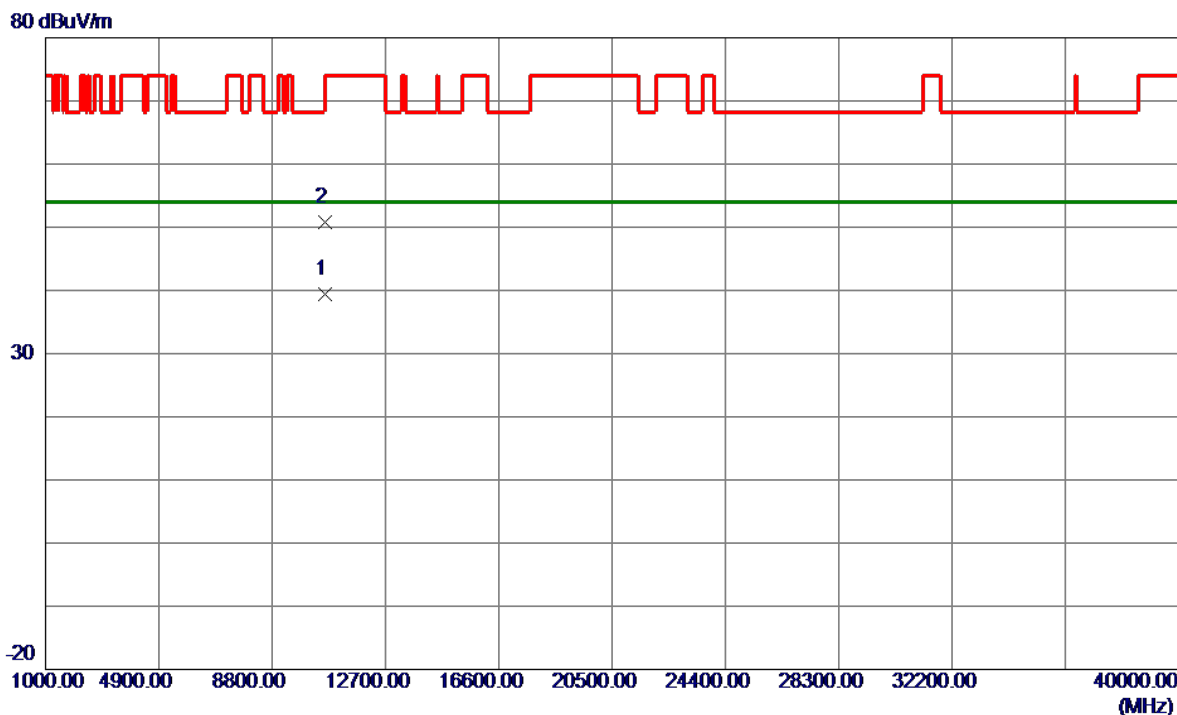


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10626.6600	26.99	12.48	39.47	54.00	-14.53	AVG	
2	10630.7900	38.29	12.48	50.77	74.00	-23.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

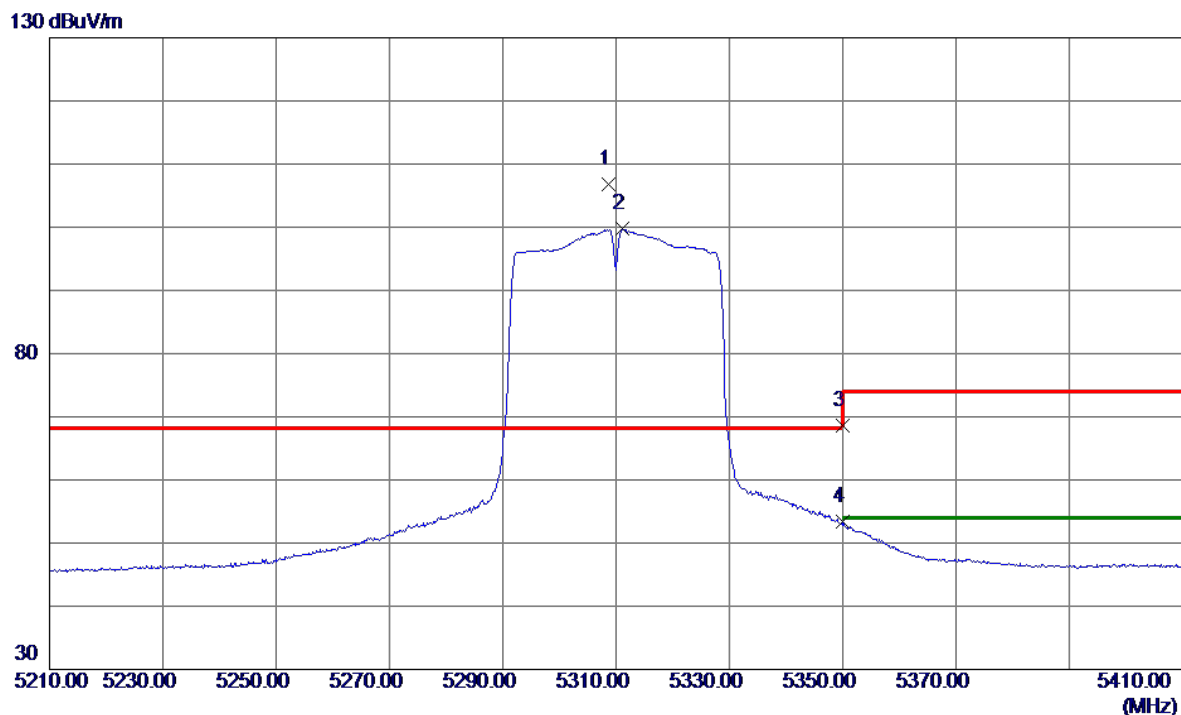


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.6000	91.08	15.63	106.71	68.20	38.51	Peak	No Limit
2	5311.1000	84.09	15.63	99.72	999.00	-899.28	AVG	No Limit
3	5350.0000	52.85	15.72	68.57	74.00	-5.43	Peak	
4	5350.0000	37.66	15.72	53.38	54.00	-0.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

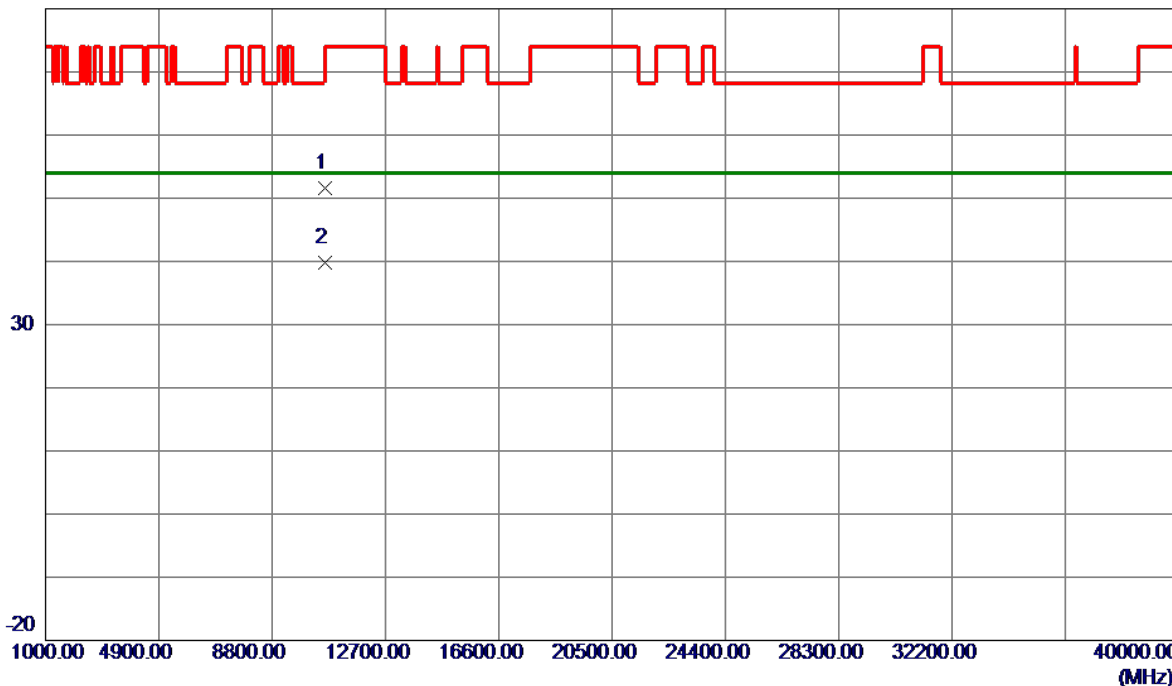


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10618.3900	39.10	12.47	51.57	74.00	-22.43	Peak	
2 *	10621.9450	27.28	12.47	39.75	54.00	-14.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

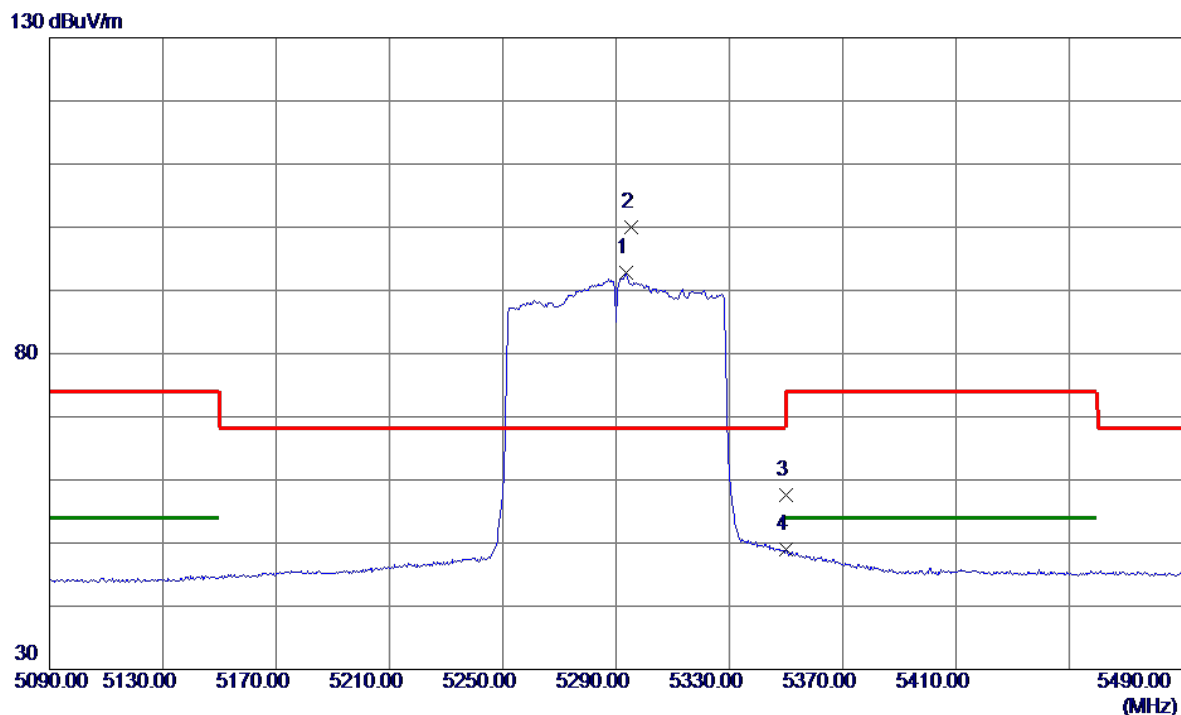


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.6000	77.22	15.59	92.81	999.00	-906.19	AVG	No Limit
2 *	5295.2000	84.33	15.60	99.93	68.20	31.73	Peak	No Limit
3	5350.0000	41.91	15.72	57.63	74.00	-16.37	Peak	
4	5350.0000	33.28	15.72	49.00	54.00	-5.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

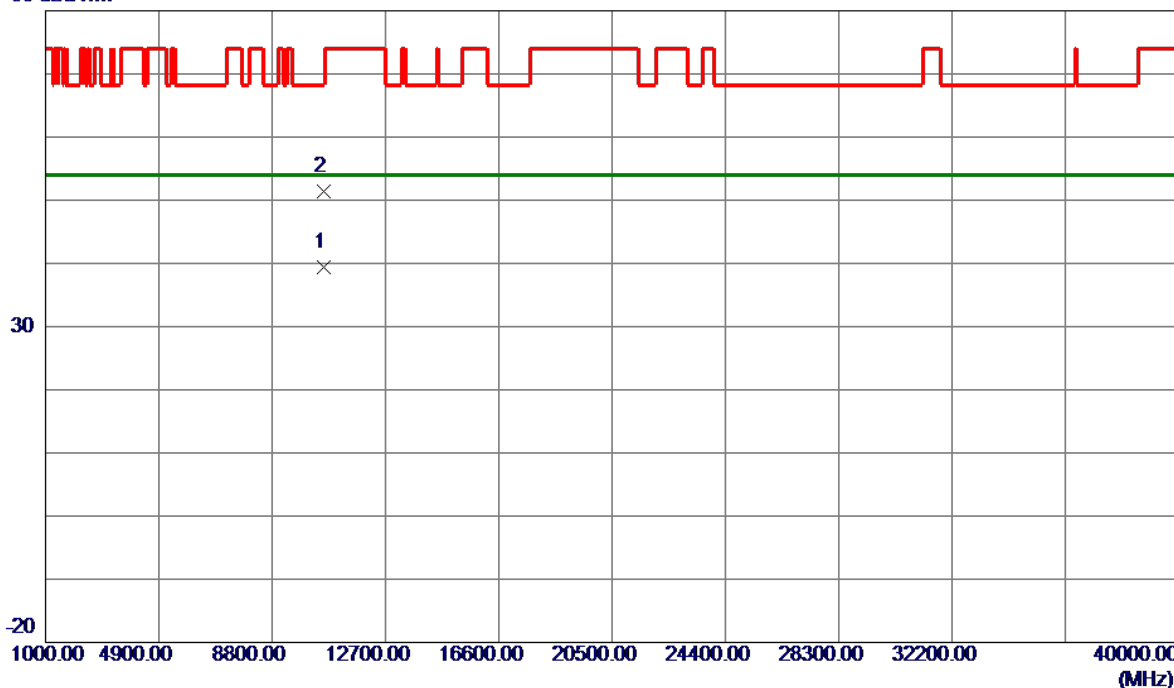


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.6900	27.00	12.44	39.44	54.00	-14.56	AVG	
2	10581.8099	38.87	12.44	51.31	68.20	-16.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

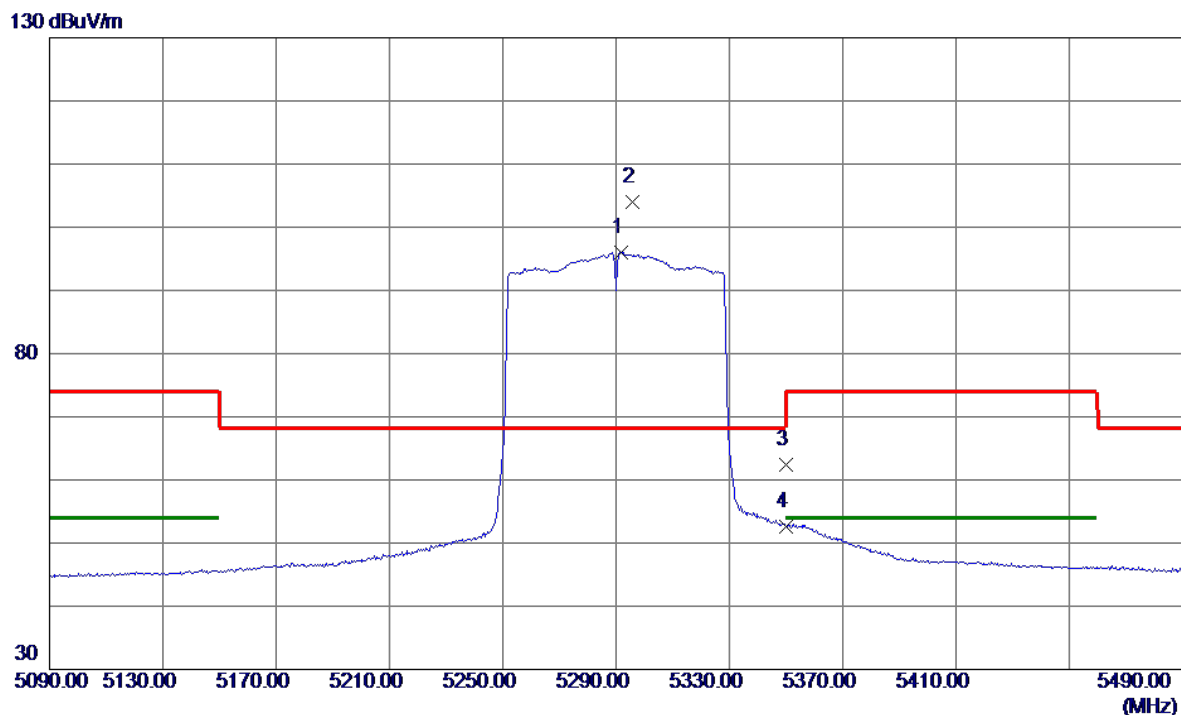


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5291.6000	80.47	15.59	96.06	999.00	-902.94	AVG	No Limit
2 *	5295.6000	88.31	15.60	103.91	68.20	35.71	Peak	No Limit
3	5350.0000	46.70	15.72	62.42	74.00	-11.58	Peak	
4	5350.0000	36.94	15.72	52.66	54.00	-1.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

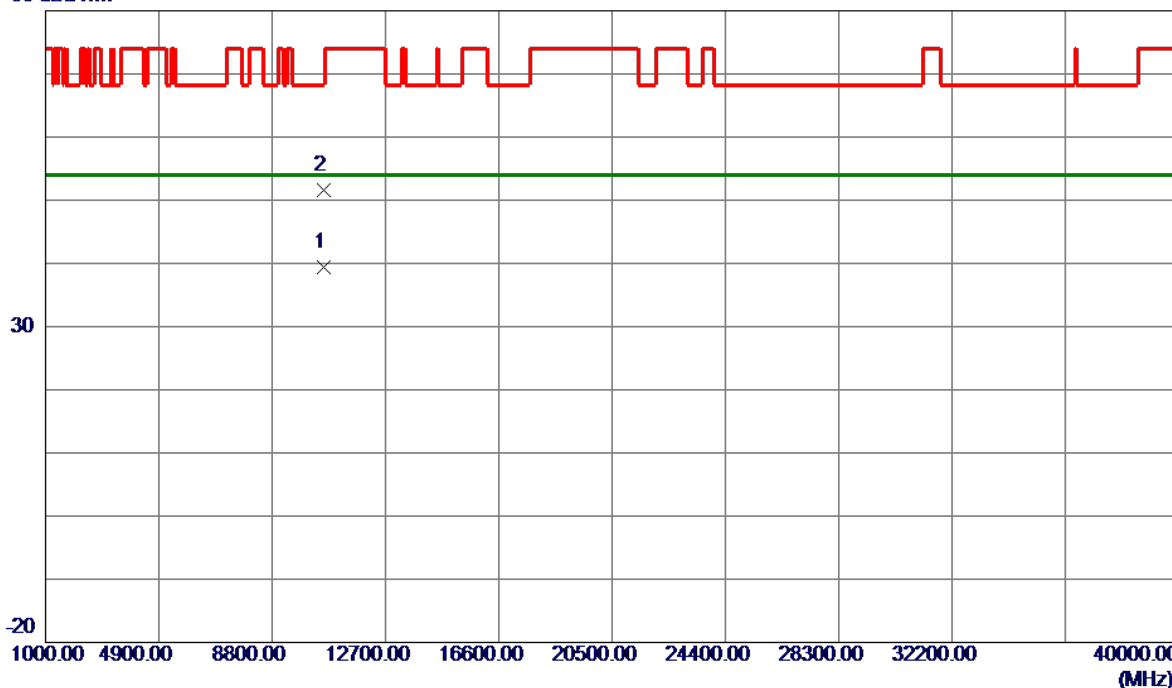


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10578.1000	26.98	12.44	39.42	54.00	-14.58	AVG	
2	10582.0250	39.25	12.44	51.69	68.20	-16.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

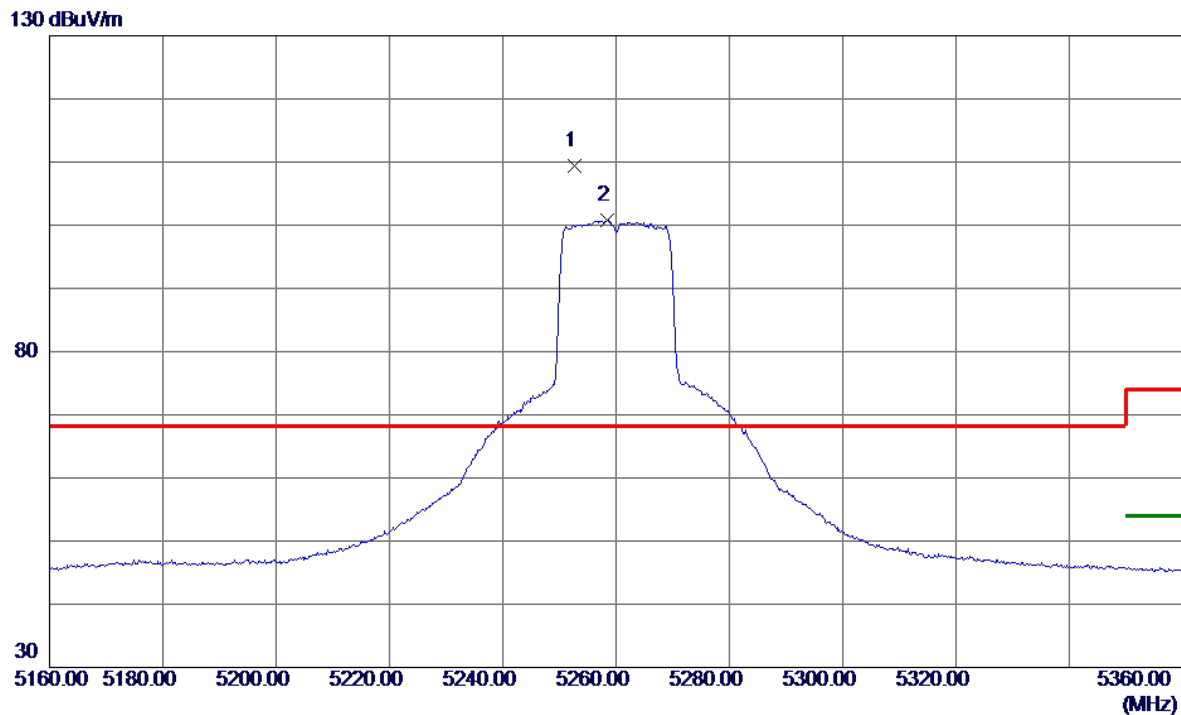


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.6000	93.94	15.50	109.44	68.20	41.24	Peak	No Limit
2	5258.4000	85.31	15.51	100.82	999.00	-898.18	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

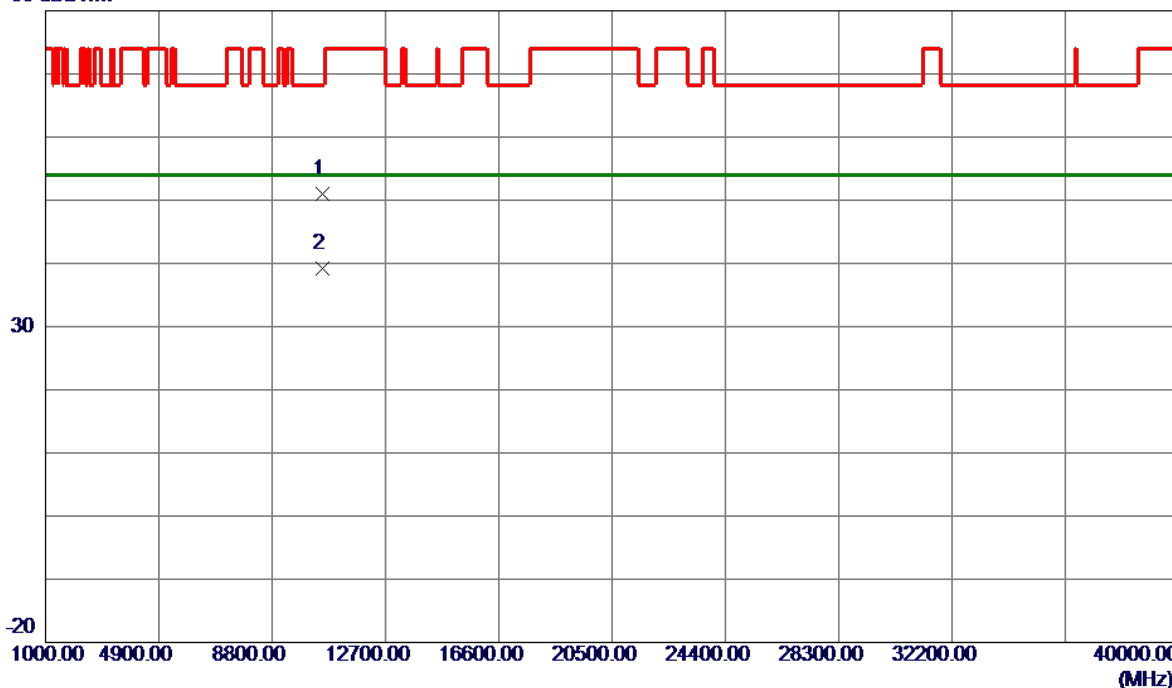


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10521.1280	38.59	12.39	50.98	68.20	-17.22	Peak	
2 *	10521.1420	26.82	12.39	39.21	54.00	-14.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

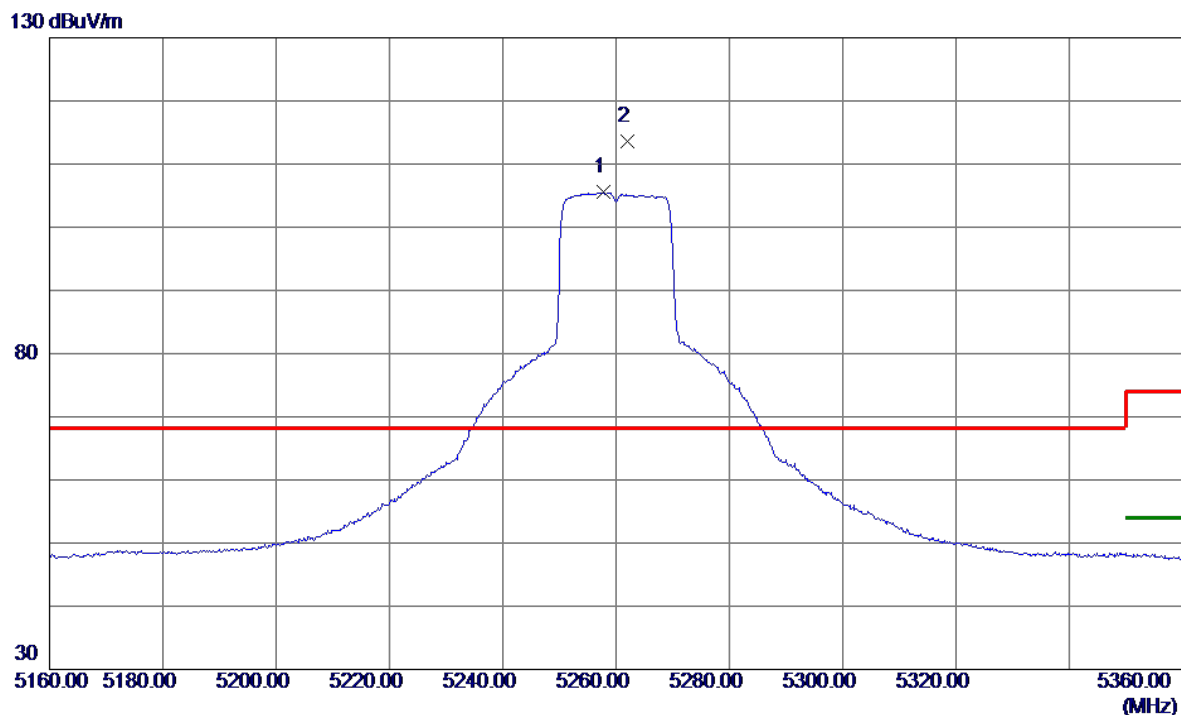


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.7000	90.03	15.51	105.54	999.00	-893.46	AVG	No Limit
2 *	5262.0000	98.16	15.52	113.68	68.20	45.48	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

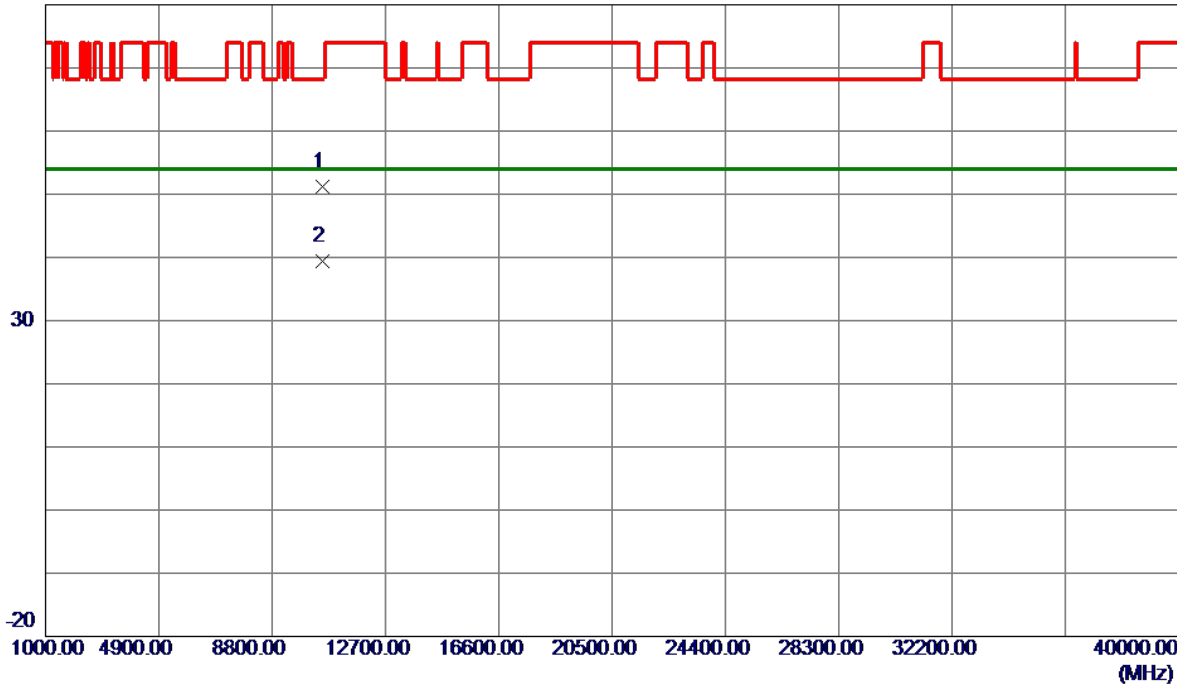


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10521.1030	38.83	12.39	51.22	68.20	-16.98	Peak	
2 *	10521.5850	26.94	12.39	39.33	54.00	-14.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

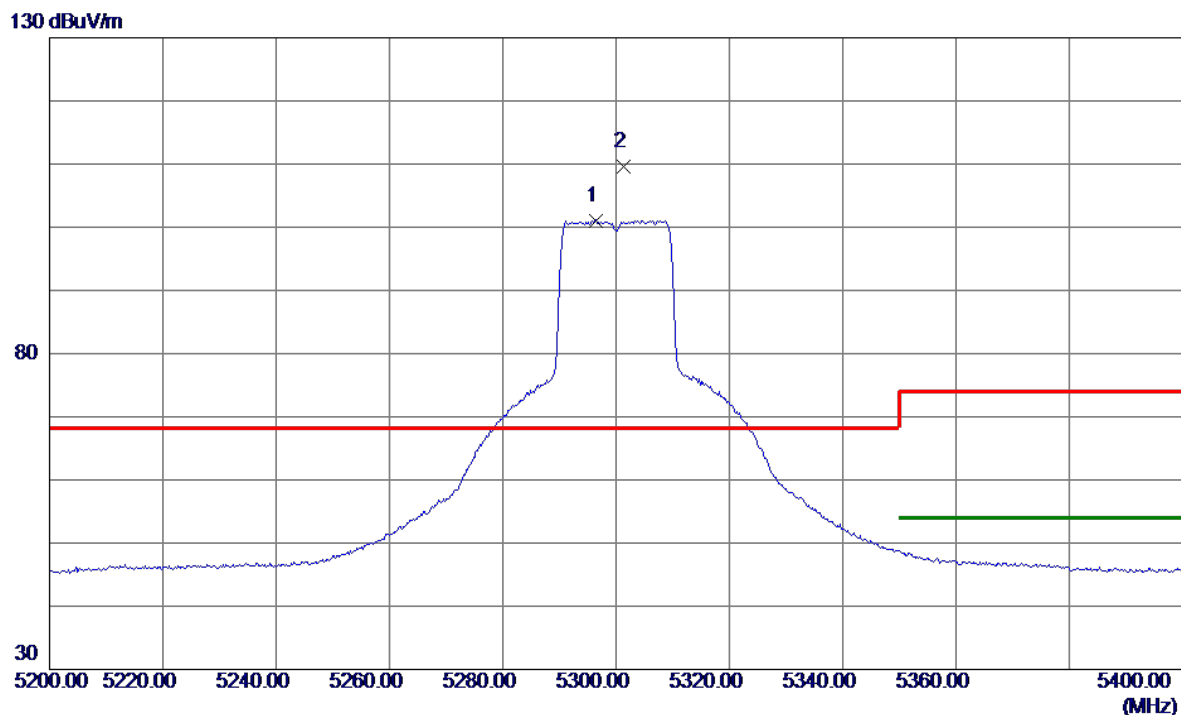


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5296.4000	85.50	15.60	101.10	999.00	-897.90	AVG	No Limit
2 *	5301.4000	94.05	15.61	109.66	68.20	41.46	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

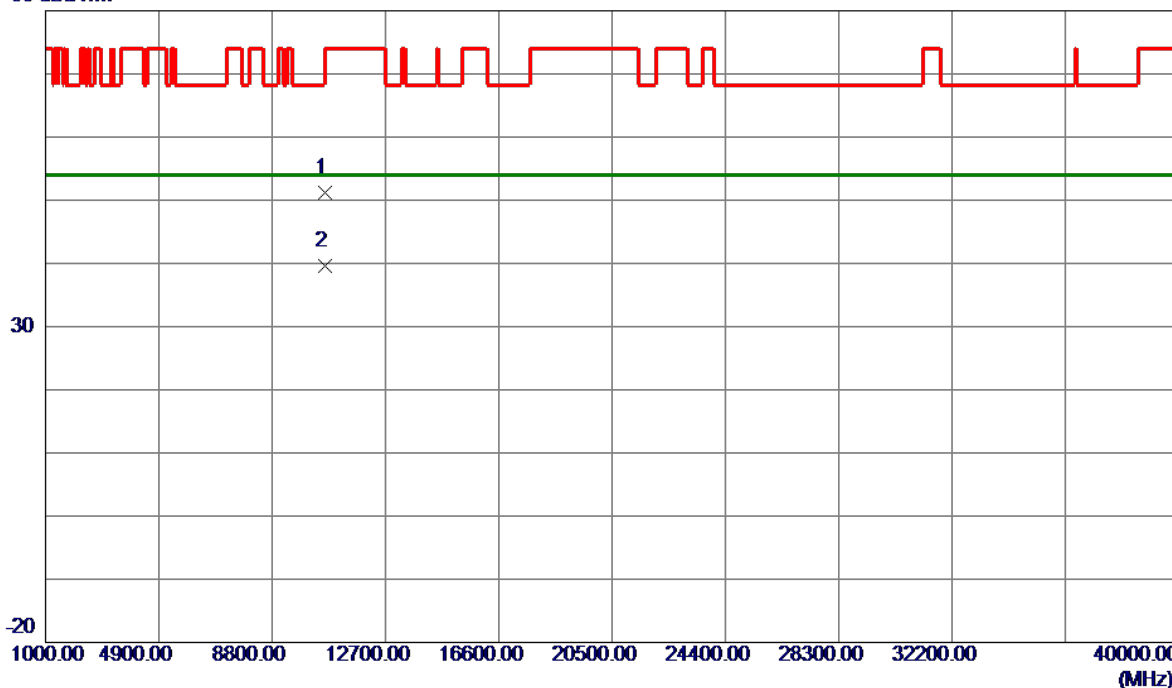


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.8130	38.79	12.46	51.25	74.00	-22.75	Peak	
2 *	10602.0000	27.16	12.46	39.62	54.00	-14.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

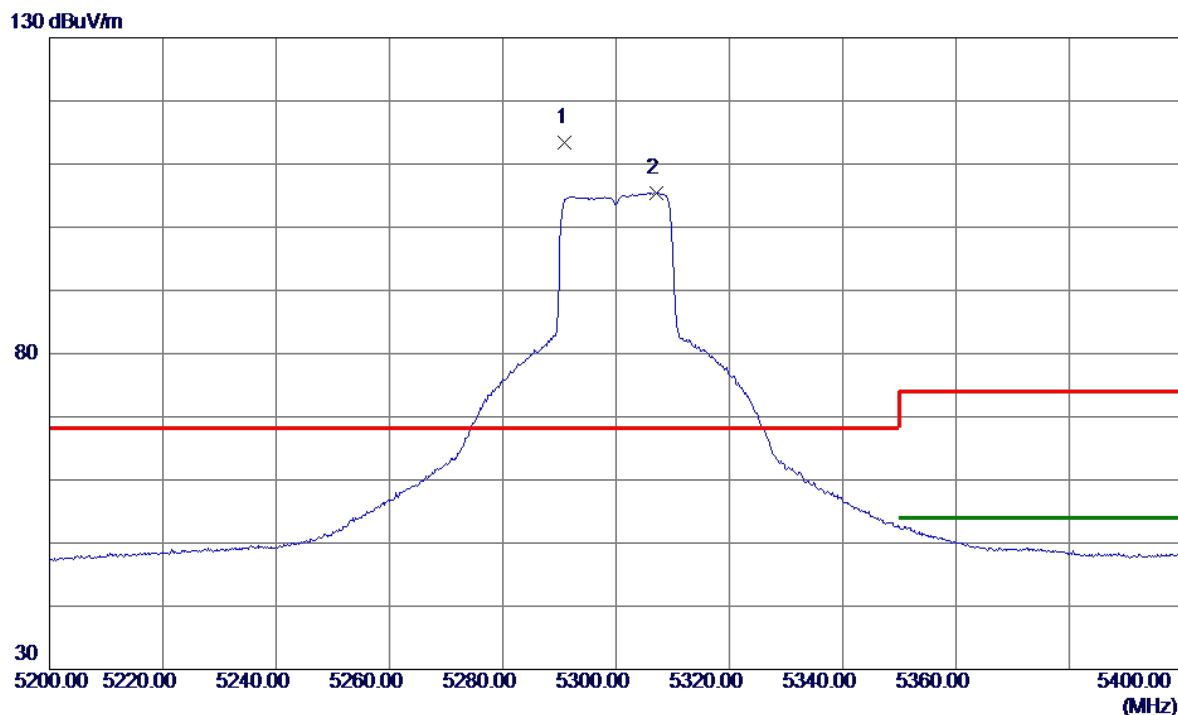


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5291.0000	97.76	15.59	113.35	68.20	45.15	Peak	No Limit
2	5307.1000	89.77	15.62	105.39	999.00	-893.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

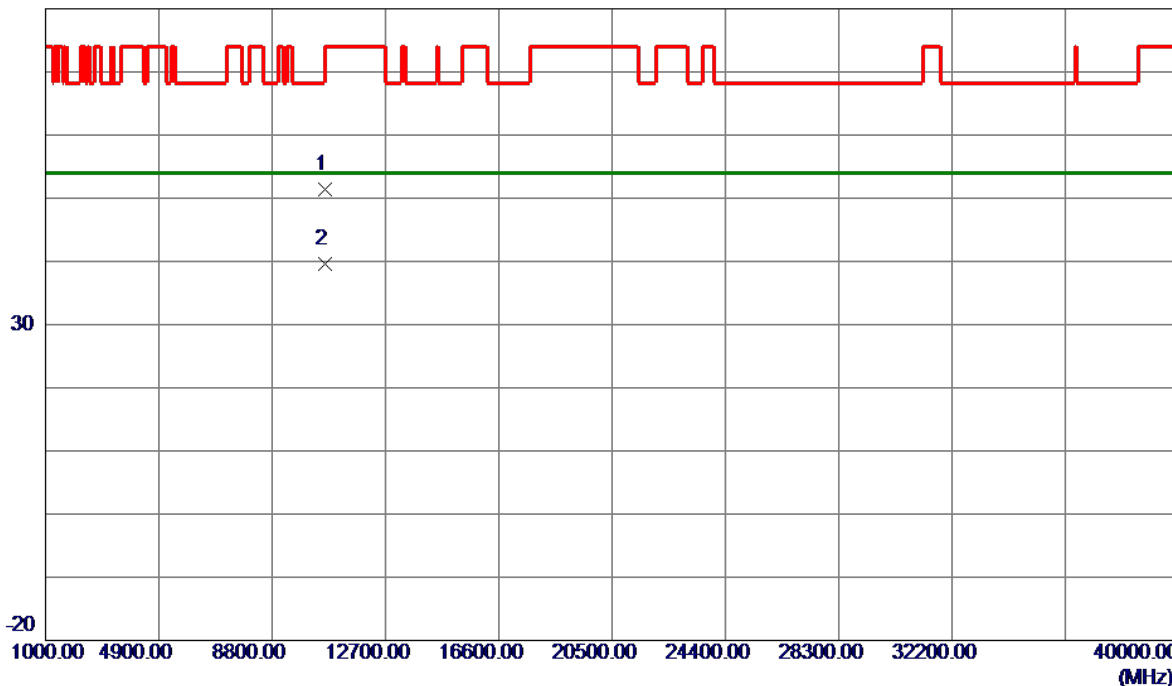


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10599.0830	38.87	12.46	51.33	68.20	-16.87	Peak	
2 *	10599.9780	27.09	12.46	39.55	54.00	-14.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

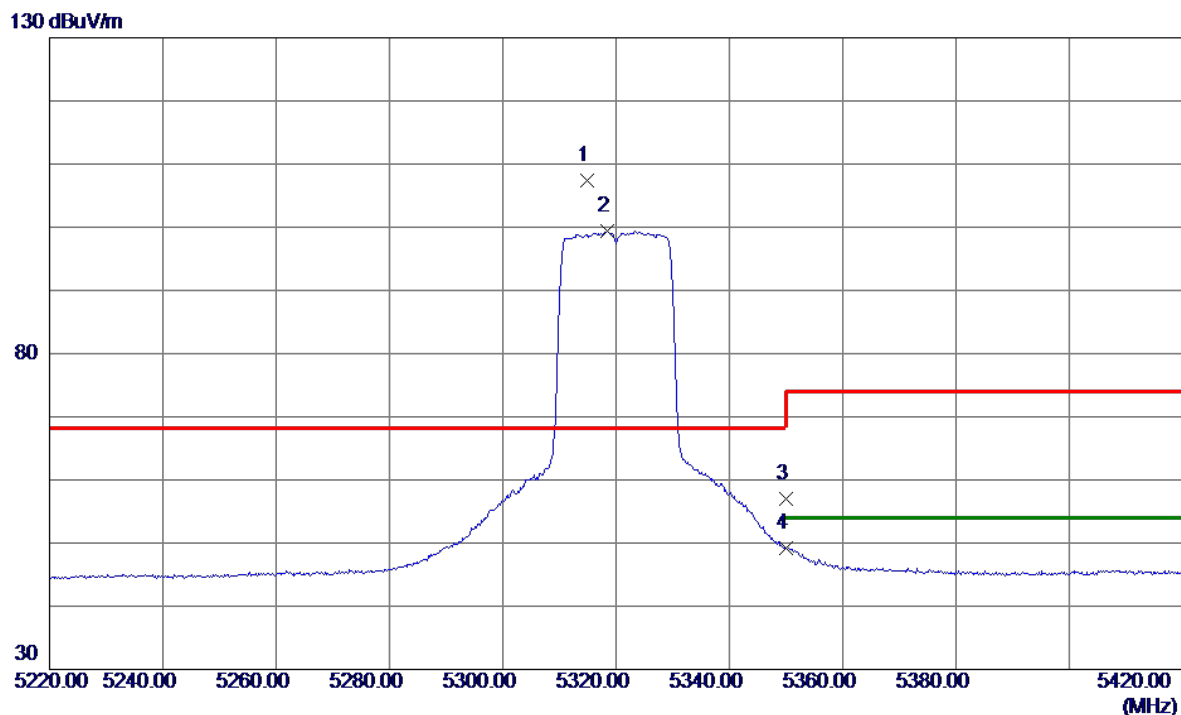


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5314.8000	91.85	15.64	107.49	68.20	39.29	Peak	No Limit
2	5318.4000	83.82	15.65	99.47	999.00	-899.53	AVG	No Limit
3	5350.0000	41.26	15.72	56.98	74.00	-17.02	Peak	
4	5350.0000	33.44	15.72	49.16	54.00	-4.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

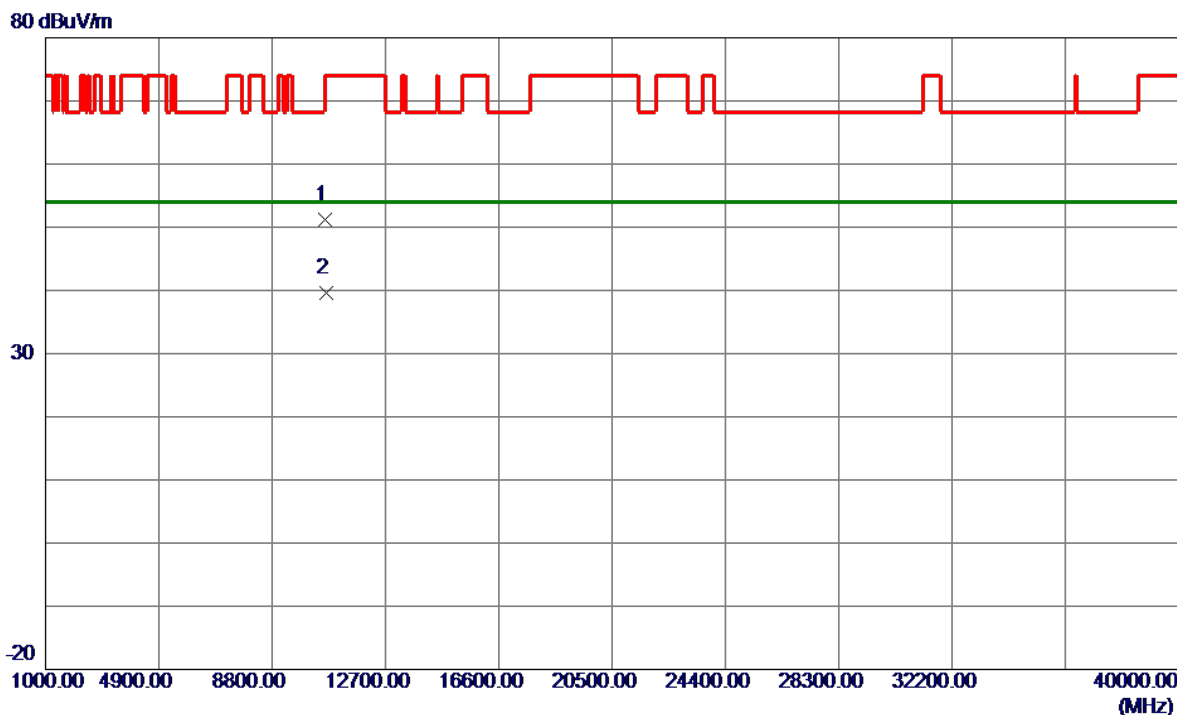


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.8949	38.68	12.49	51.17	74.00	-22.83	Peak	
2 *	10642.1650	27.05	12.49	39.54	54.00	-14.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

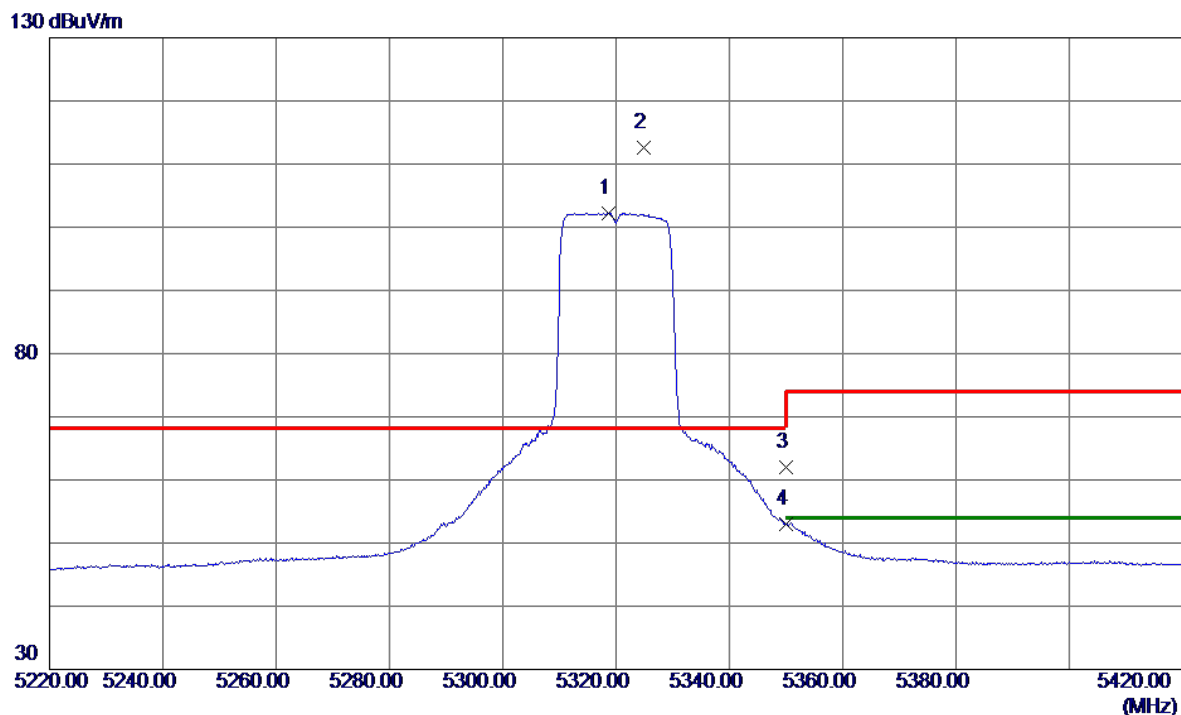


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.7000	86.59	15.65	102.24	999.00	-896.76	AVG	No Limit
2 *	5324.9000	96.95	15.66	112.61	68.20	44.41	Peak	No Limit
3	5350.0000	46.22	15.72	61.94	74.00	-12.06	Peak	
4	5350.0000	37.27	15.72	52.99	54.00	-1.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

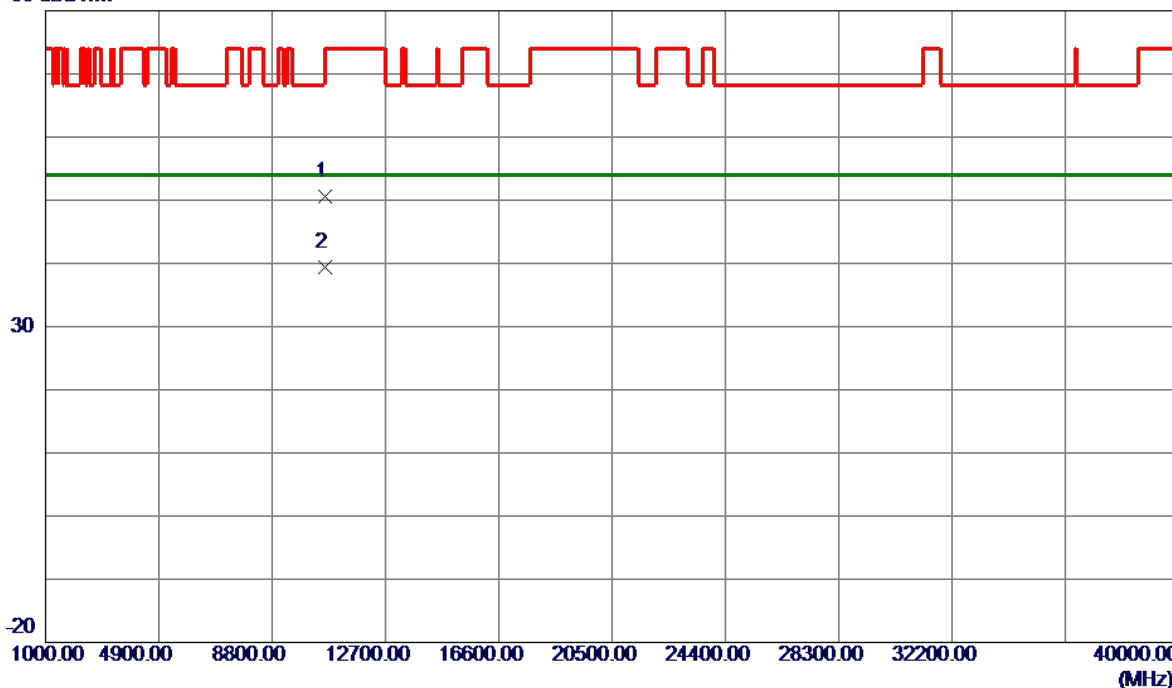


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10639.7570	38.17	12.49	50.66	74.00	-23.34	Peak	
2 *	10640.8450	26.97	12.49	39.46	54.00	-14.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

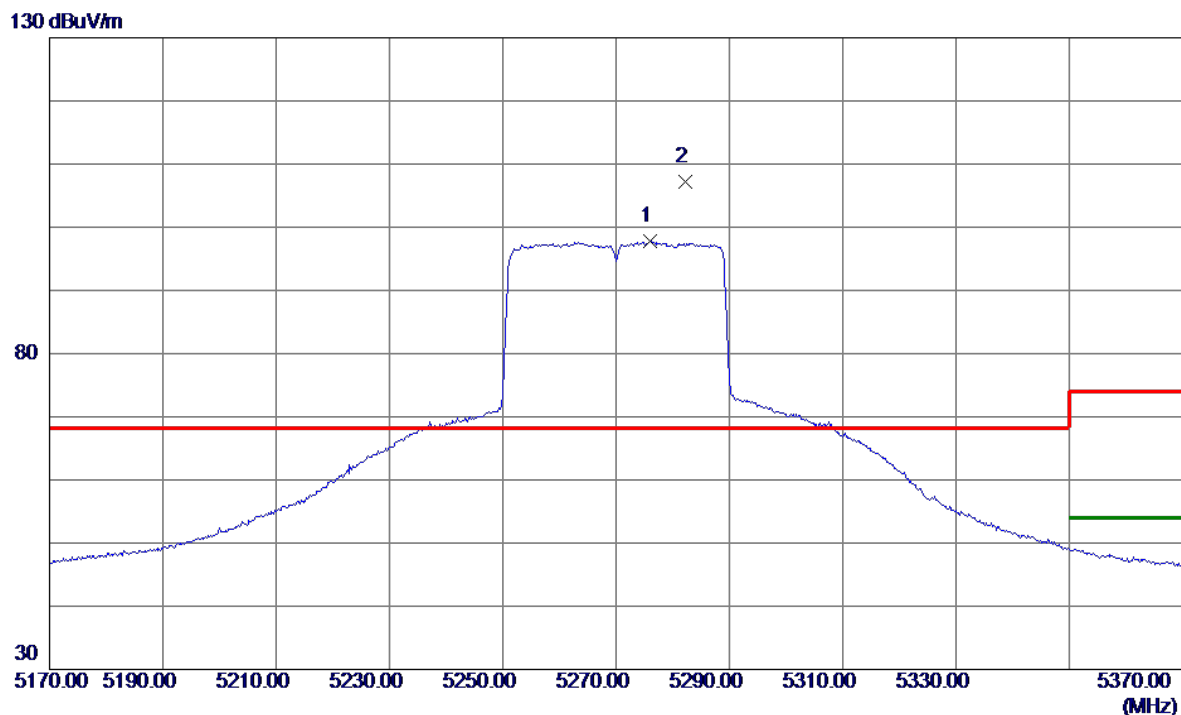


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5276.0000	82.29	15.55	97.84	999.00	-901.16	AVG	No Limit
2 *	5282.2000	91.55	15.57	107.12	68.20	38.92	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

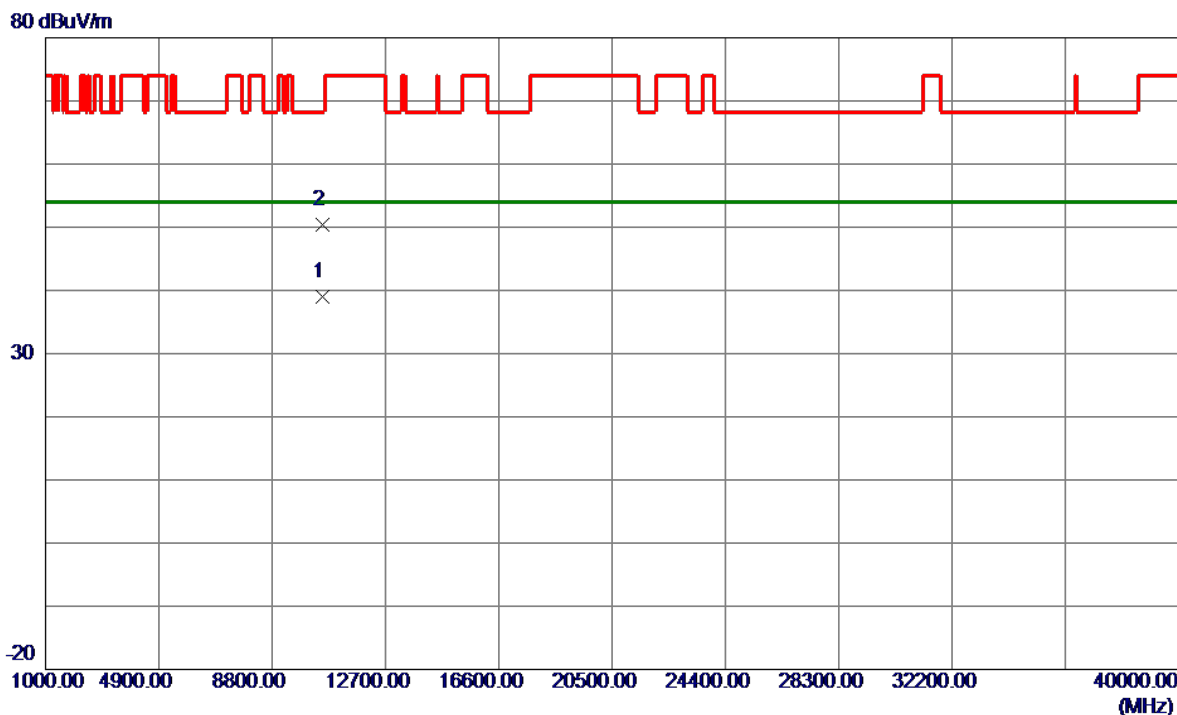


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10537.6700	26.58	12.41	38.99	54.00	-15.01	AVG	
2	10538.5050	37.96	12.41	50.37	68.20	-17.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

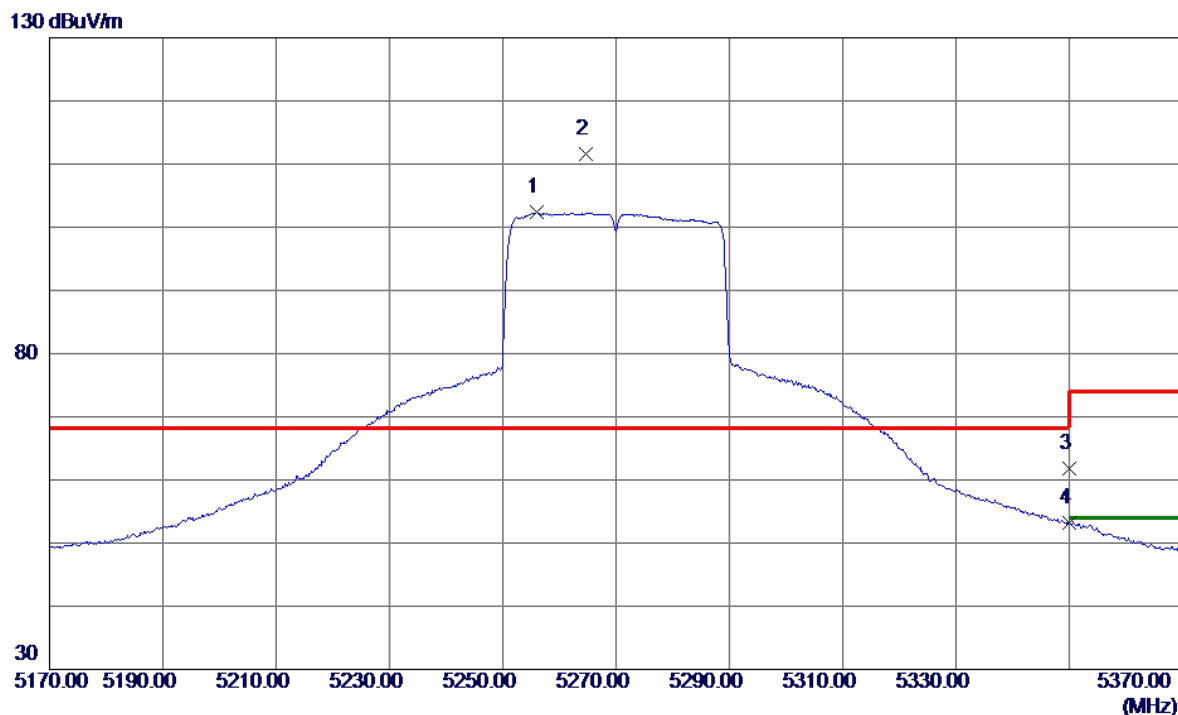


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5256.1000	86.80	15.51	102.31	999.00	-896.69	AVG	No Limit
2 *	5264.6000	96.05	15.53	111.58	68.20	43.38	Peak	No Limit
3	5350.0000	46.02	15.72	61.74	74.00	-12.26	Peak	
4	5350.0000	37.49	15.72	53.21	54.00	-0.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

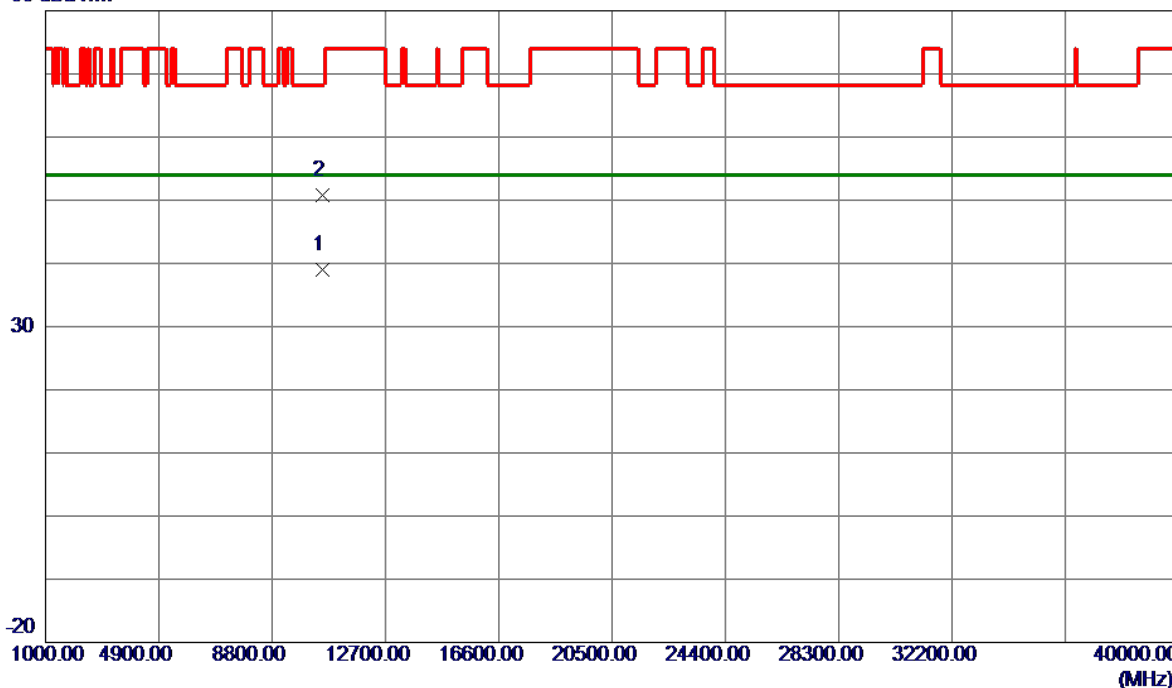


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.6550	26.50	12.41	38.91	54.00	-15.09	AVG	
2	10542.0420	38.42	12.41	50.83	68.20	-17.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

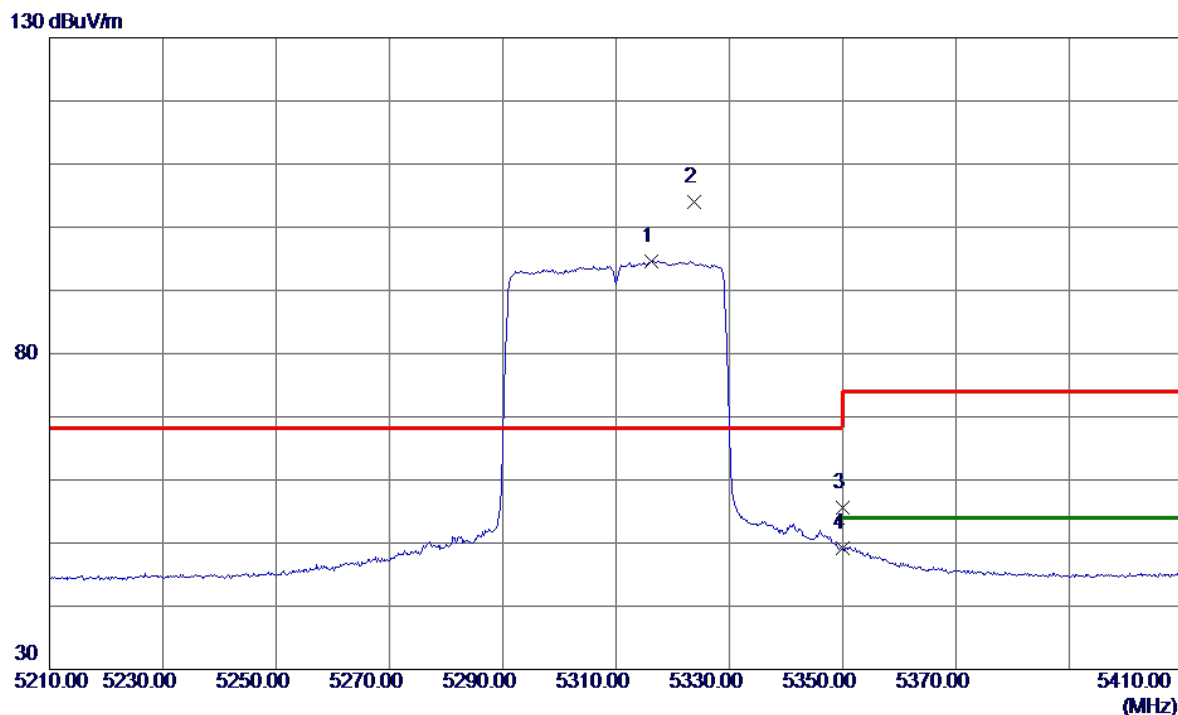


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5316.2000	79.02	15.64	94.66	999.00	-904.34	AVG	No Limit
2 *	5323.8000	88.32	15.66	103.98	68.20	35.78	Peak	No Limit
3	5350.0000	39.97	15.72	55.69	74.00	-18.31	Peak	
4	5350.0000	33.43	15.72	49.15	54.00	-4.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

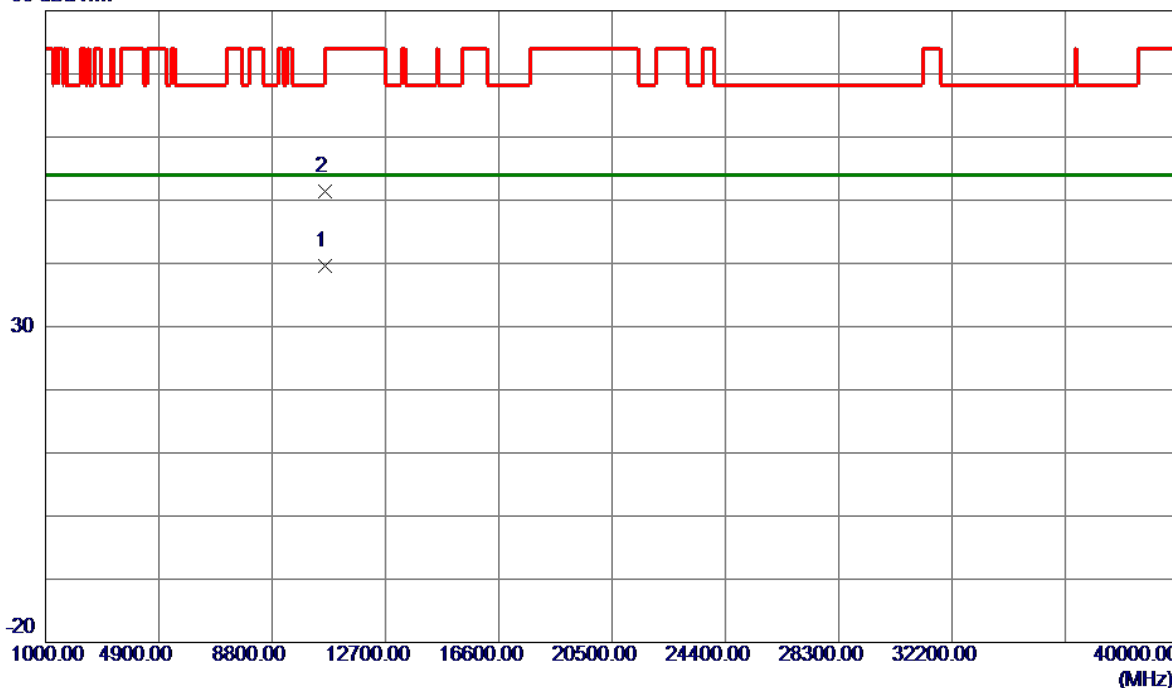


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.4150	27.14	12.47	39.61	54.00	-14.39	AVG	
2	10621.4070	38.95	12.47	51.42	74.00	-22.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

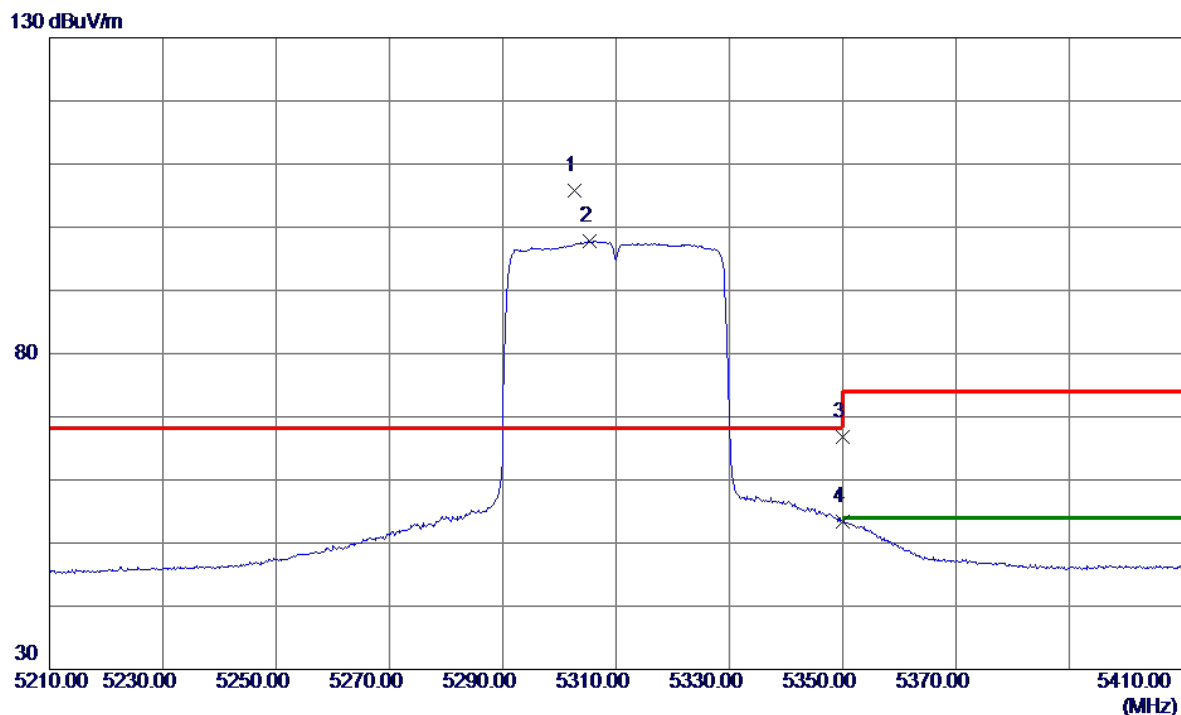


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5302.6000	90.10	15.61	105.71	68.20	37.51	Peak	No Limit
2	5305.3000	82.13	15.62	97.75	999.00	-901.25	AVG	No Limit
3	5350.0000	51.07	15.72	66.79	74.00	-7.21	Peak	
4	5350.0000	37.63	15.72	53.35	54.00	-0.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

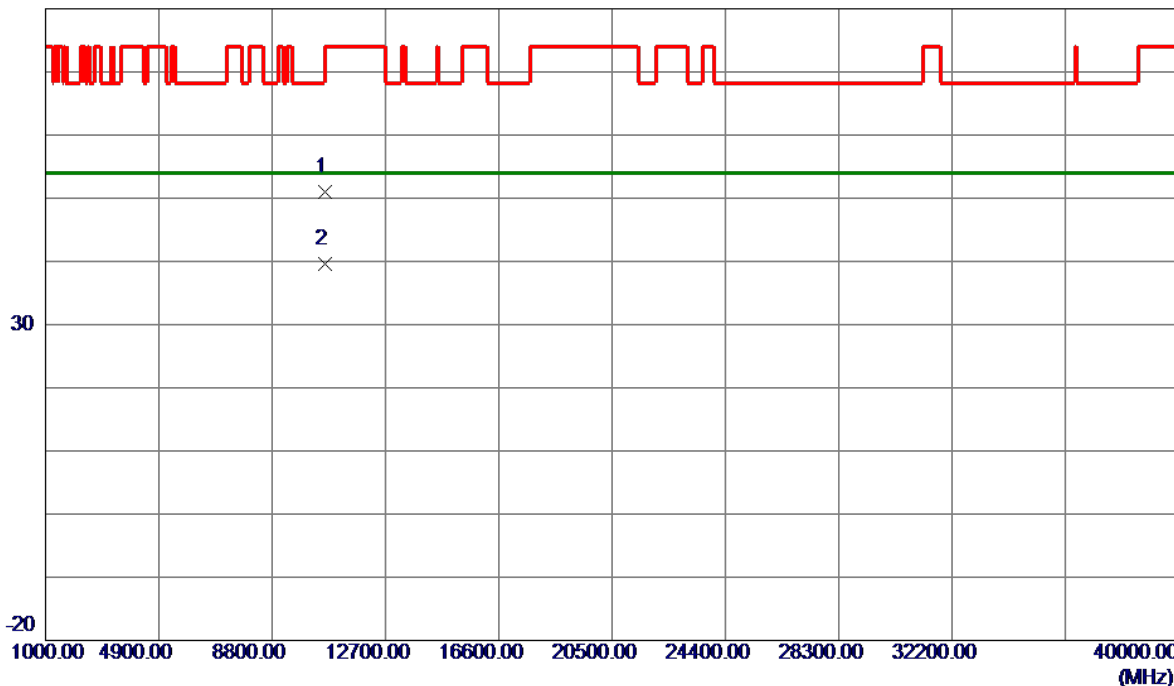


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.9480	38.52	12.47	50.99	74.00	-23.01	Peak	
2 *	10621.6100	27.21	12.47	39.68	54.00	-14.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

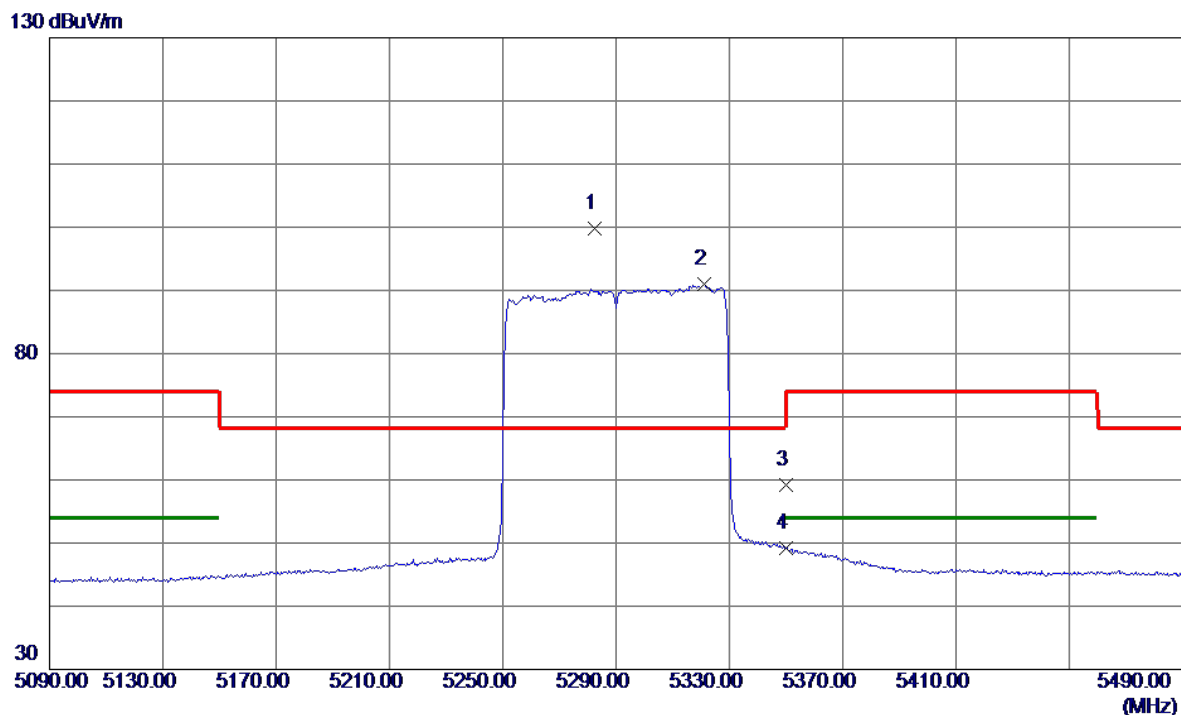


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5282.4000	84.20	15.57	99.77	68.20	31.57	Peak	No Limit
2	5321.2000	75.26	15.66	90.92	999.00	-908.08	AVG	No Limit
3	5350.0000	43.57	15.72	59.29	74.00	-14.71	Peak	
4	5350.0000	33.42	15.72	49.14	54.00	-4.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

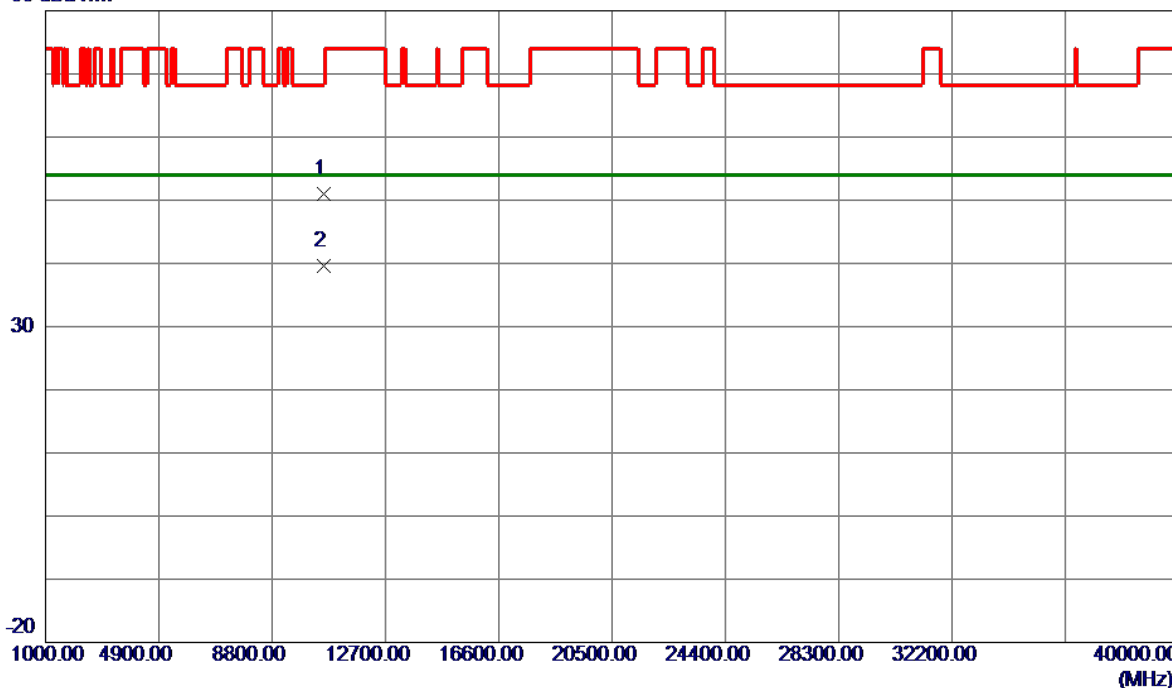


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10579.7950	38.52	12.44	50.96	68.20	-17.24	Peak	
2 *	10582.2920	27.12	12.44	39.56	54.00	-14.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

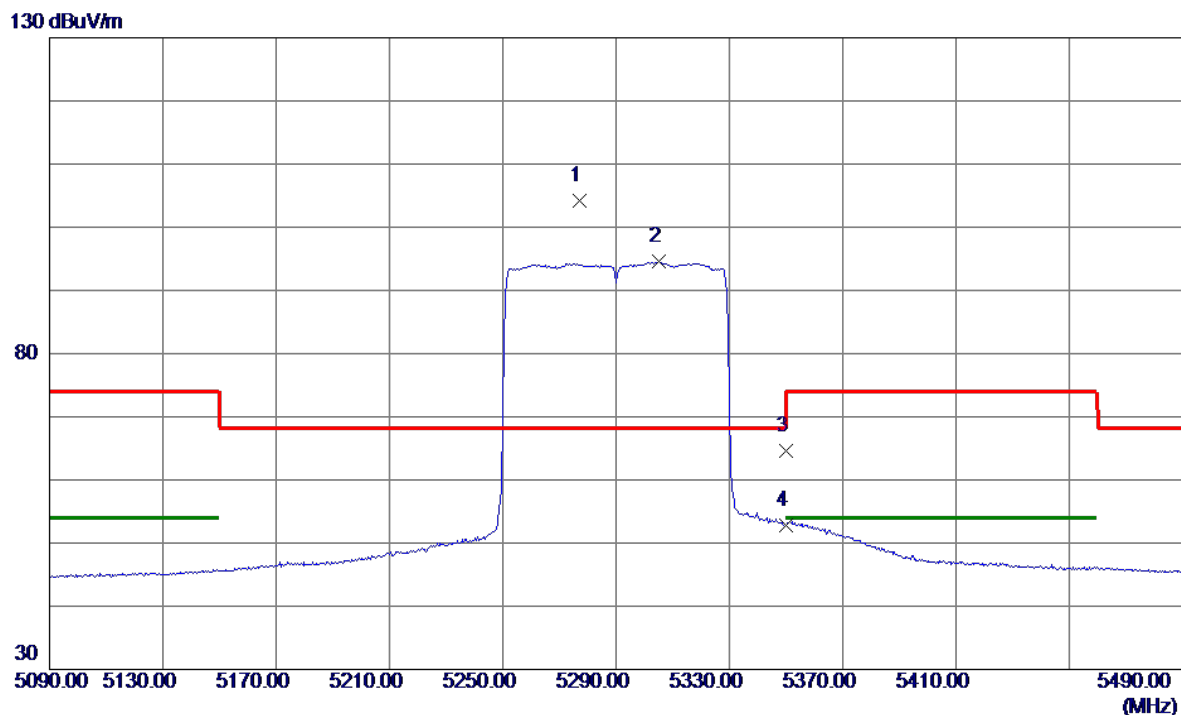


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5277.2000	88.70	15.55	104.25	68.20	36.05	Peak	No Limit
2	5305.2000	78.89	15.62	94.51	999.00	-904.49	AVG	No Limit
3	5350.0000	48.83	15.72	64.55	74.00	-9.45	Peak	
4	5350.0000	37.07	15.72	52.79	54.00	-1.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

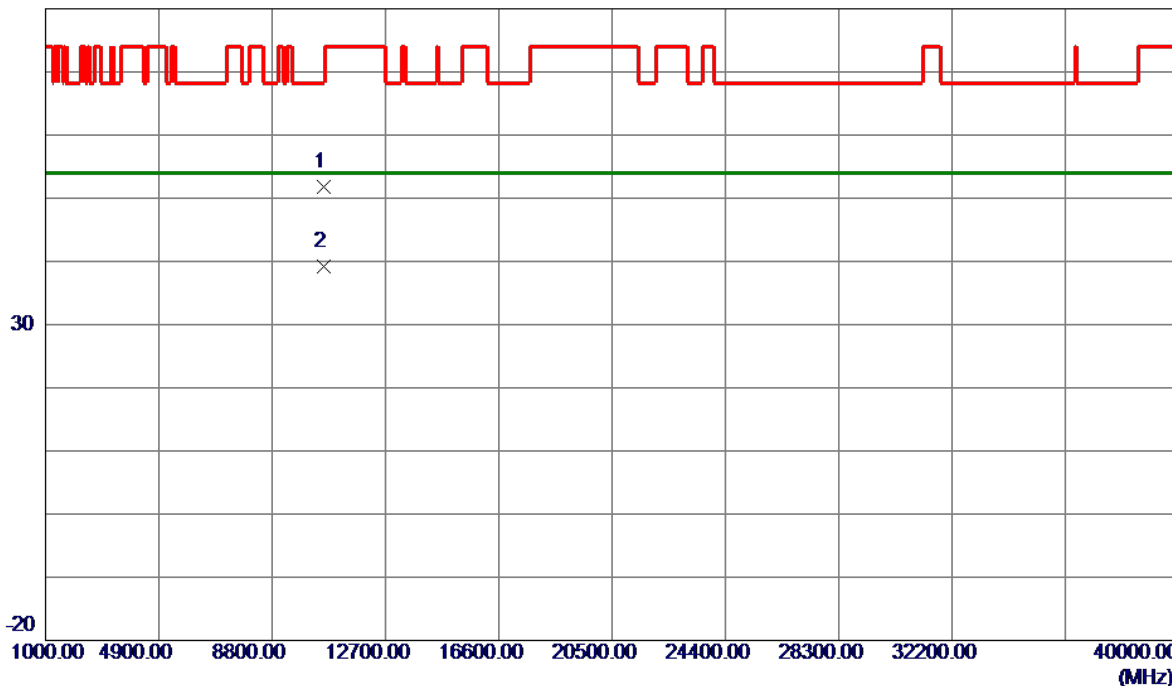


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10578.7980	39.28	12.44	51.72	68.20	-16.48	Peak	
2 *	10580.2600	26.81	12.44	39.25	54.00	-14.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

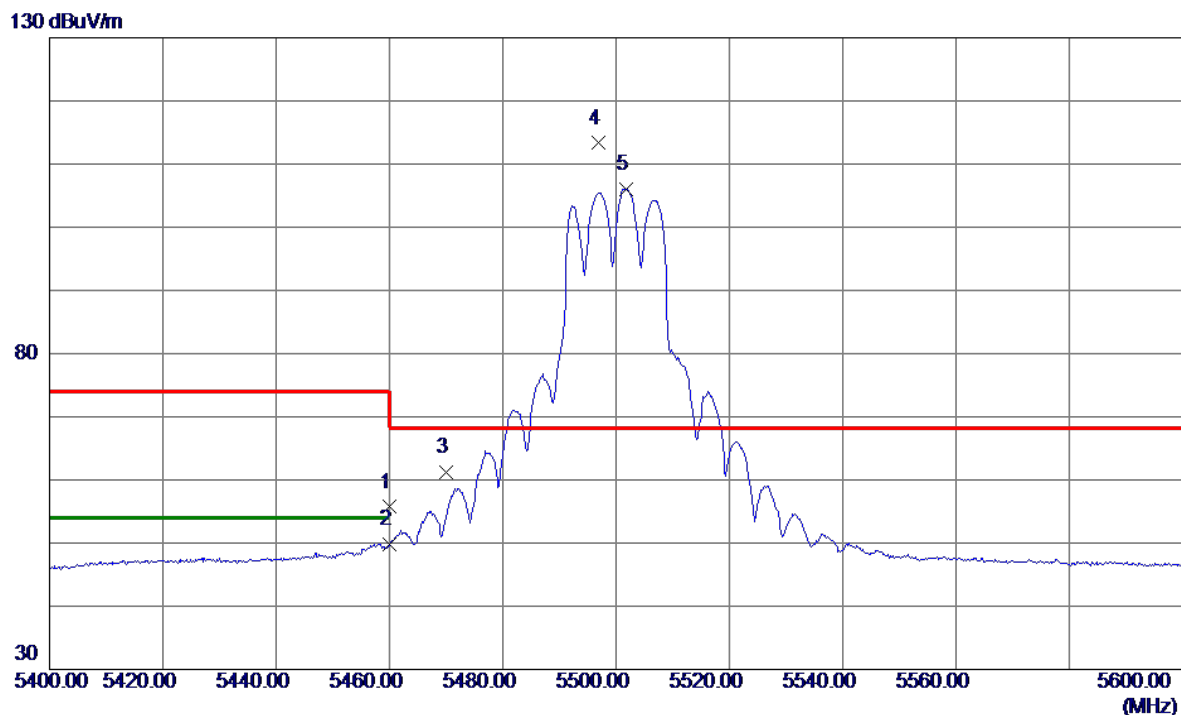


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.73	15.97	55.70	74.00	-18.30	Peak	
2	5460.0000	33.81	15.97	49.78	54.00	-4.22	AVG	
3	5470.0000	45.23	16.00	61.23	68.20	-6.97	Peak	
4 *	5496.8000	97.24	16.06	113.30	68.20	45.10	Peak	No Limit
5	5501.8000	90.03	16.07	106.10	999.00	-892.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

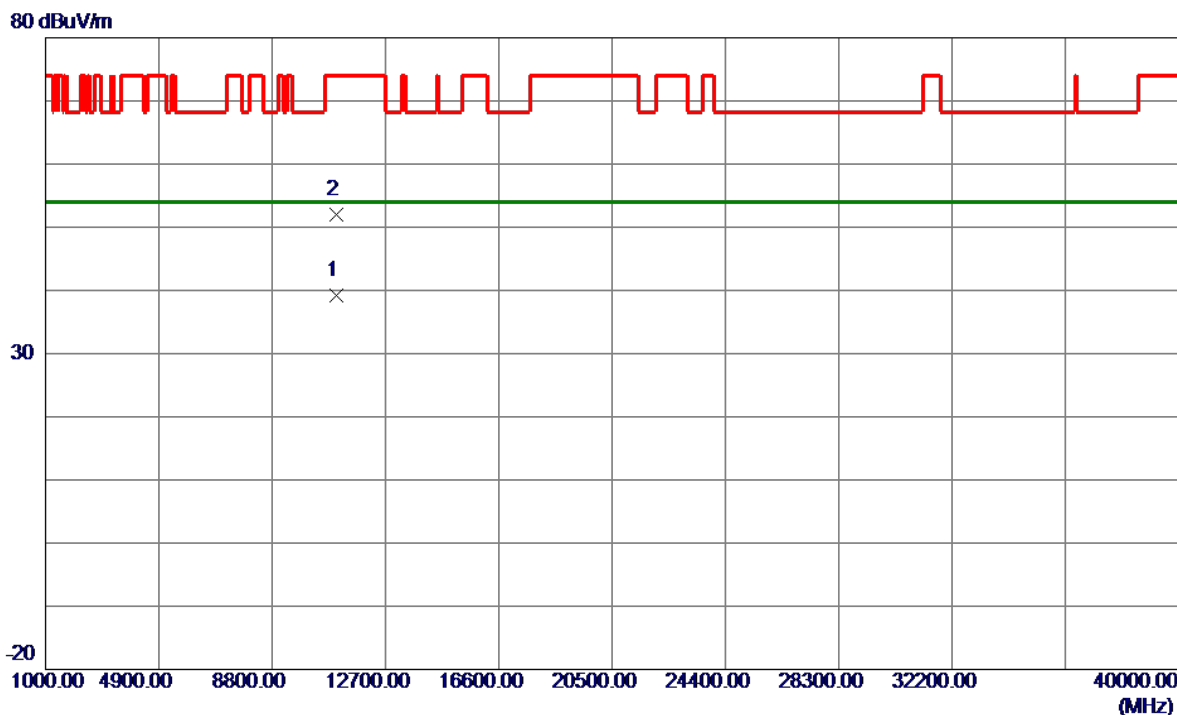


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.1800	26.47	12.78	39.25	54.00	-14.75	AVG	
2	11000.6250	39.13	12.78	51.91	74.00	-22.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

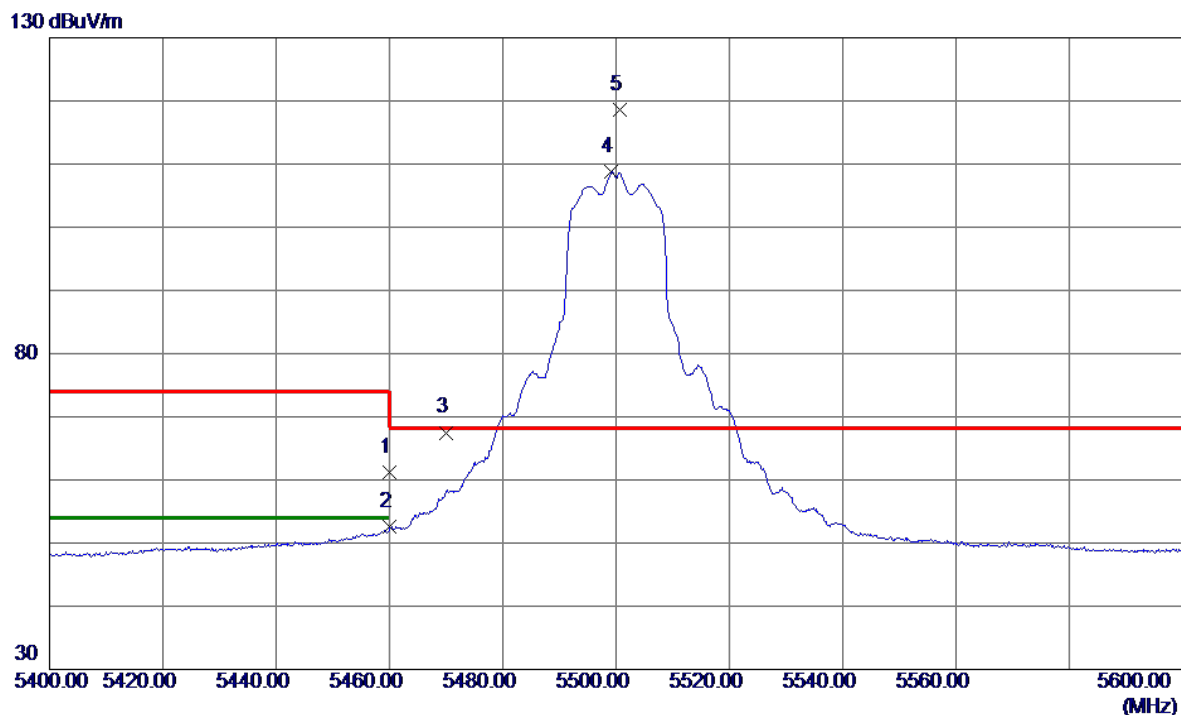


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.28	15.97	61.25	74.00	-12.75	Peak	
2	5460.0000	36.54	15.97	52.51	54.00	-1.49	AVG	
3	5470.0000	51.50	16.00	67.50	68.20	-0.70	Peak	
4	5499.2000	92.82	16.06	108.88	999.00	-890.12	AVG	No Limit
5 *	5500.6000	102.54	16.07	118.61	68.20	50.41	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

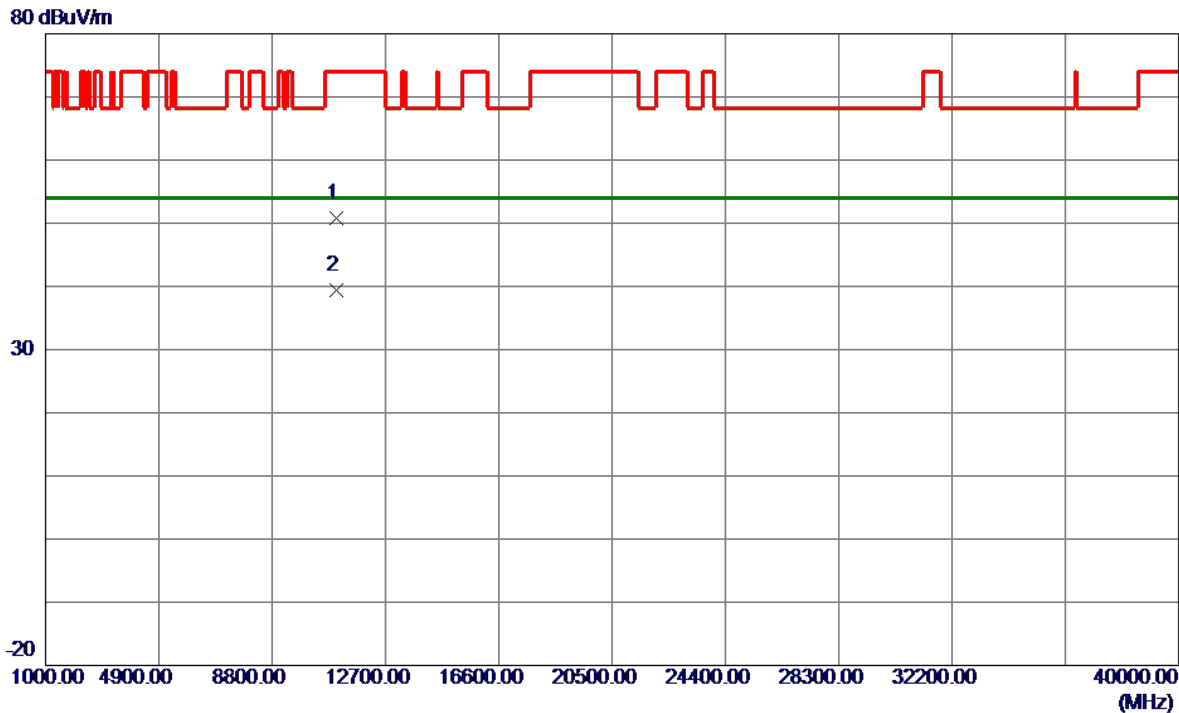


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.2000	38.04	12.78	50.82	74.00	-23.18	Peak	
2 *	11001.6500	26.54	12.78	39.32	54.00	-14.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

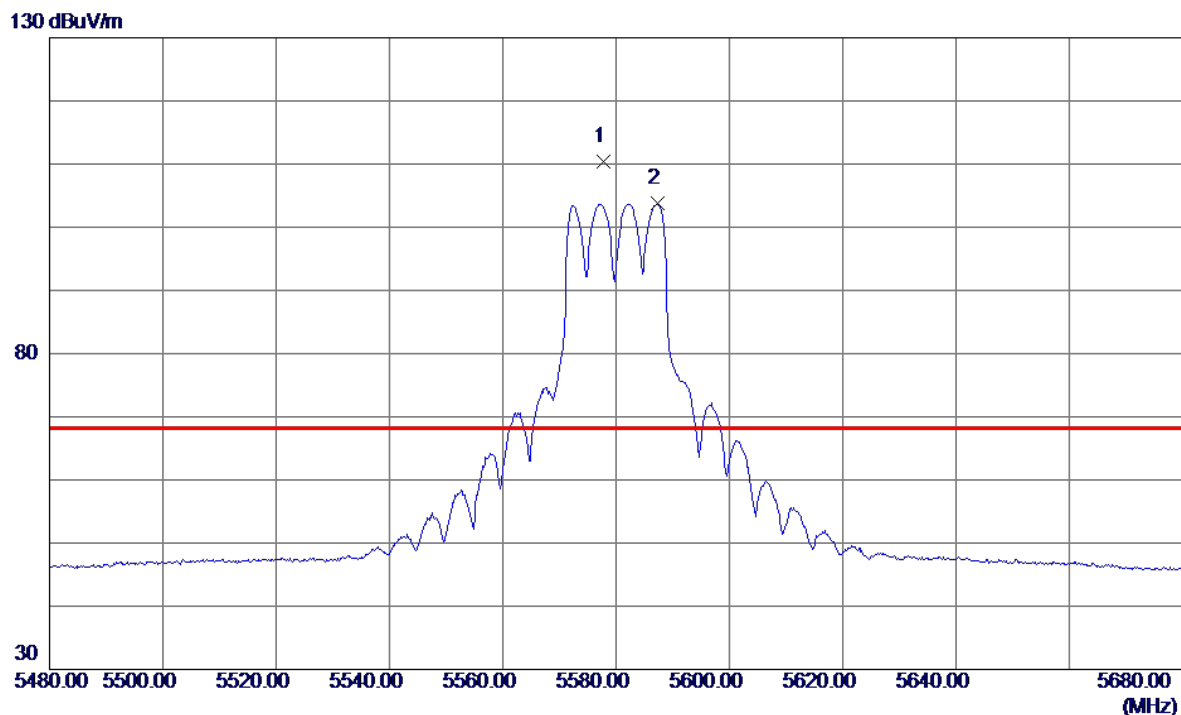


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5577.8000	94.24	16.22	110.46	68.20	42.26	Peak	No Limit
2	5587.4000	87.54	16.24	103.78	999.00	-895.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

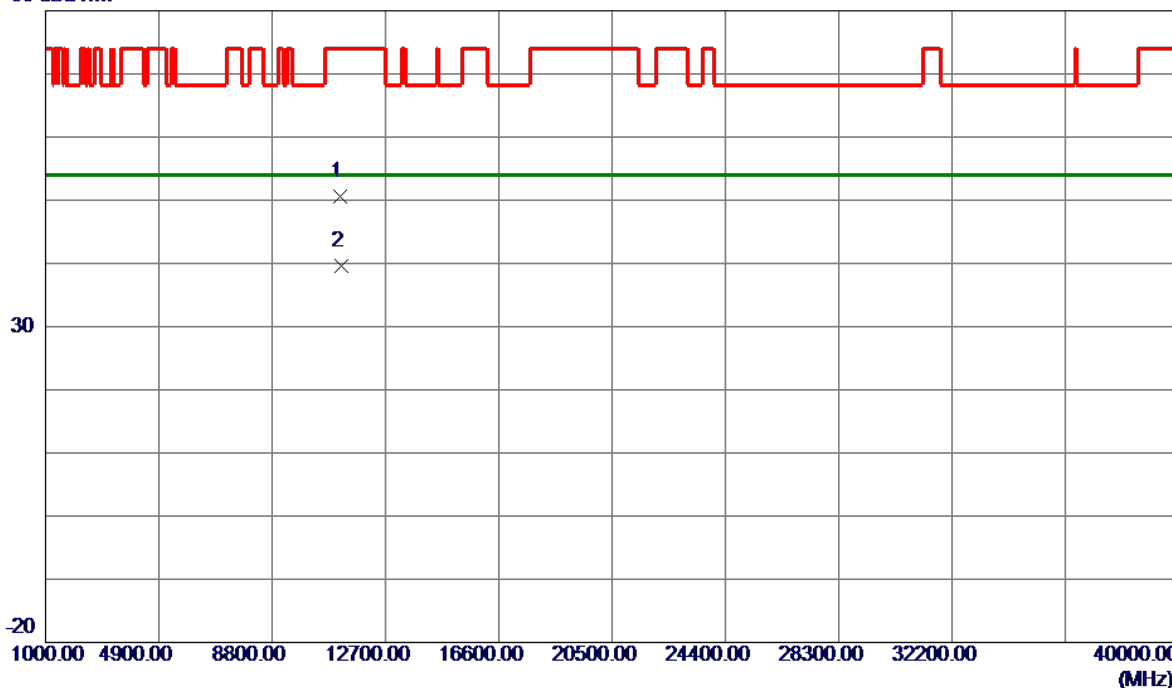


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.7250	37.63	12.90	50.53	74.00	-23.47	Peak	
2 *	11162.3650	26.61	12.90	39.51	54.00	-14.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

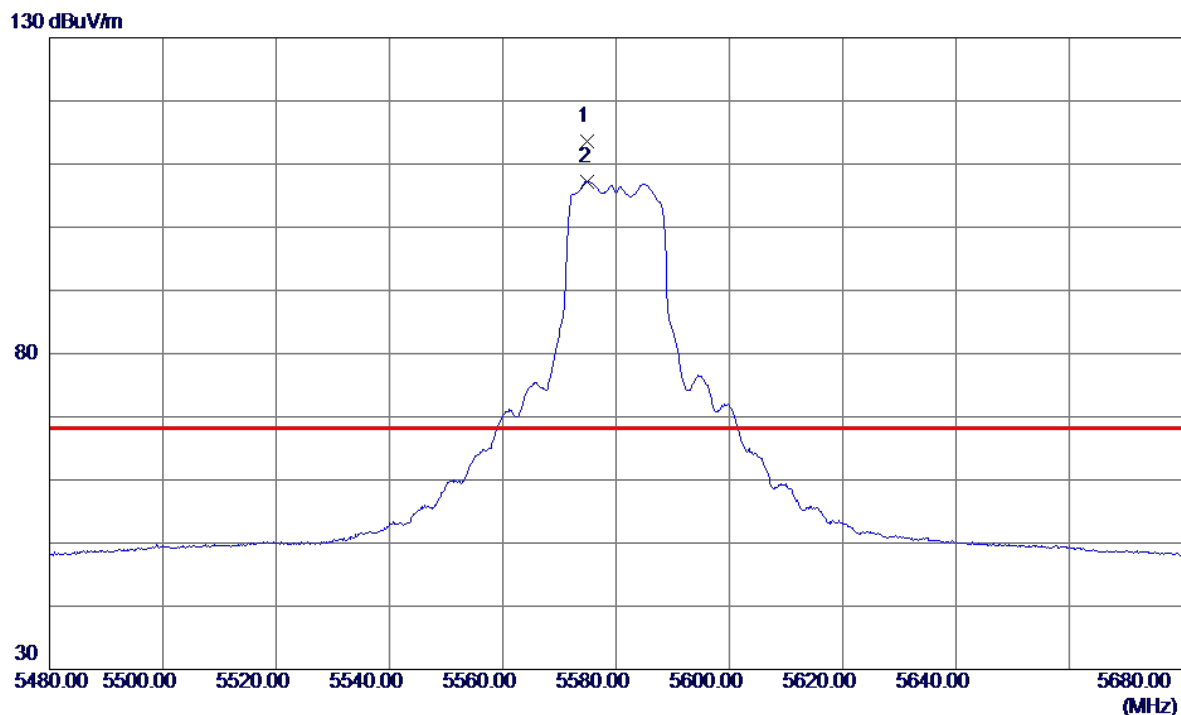


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5574.9000	97.42	16.21	113.63	68.20	45.43	Peak	No Limit
2	5575.0000	90.99	16.21	107.20	999.00	-891.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

80 dBuV/m

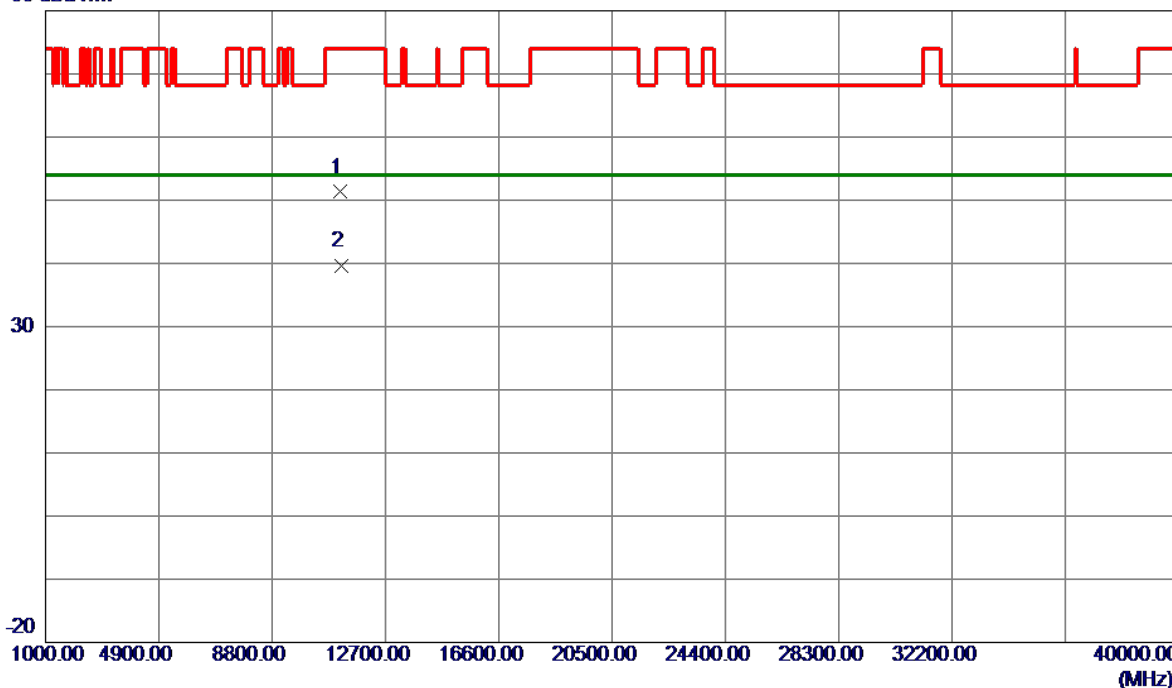


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11158.7000	38.40	12.90	51.30	74.00	-22.70	Peak	
2 *	11161.7750	26.73	12.90	39.63	54.00	-14.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

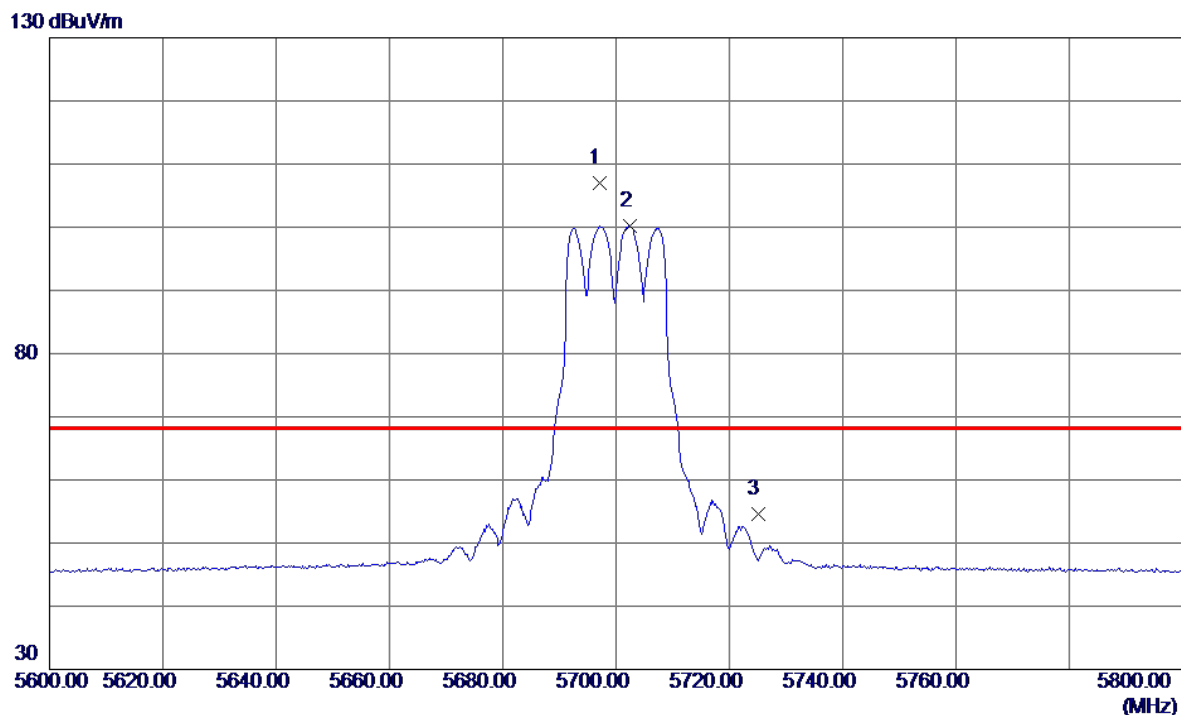


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5697.0000	90.50	16.46	106.96	68.20	38.76	Peak	No Limit
2	5702.4000	83.80	16.47	100.27	999.00	-898.73	AVG	No Limit
3	5725.0000	38.10	16.51	54.61	68.20	-13.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

80 dBuV/m

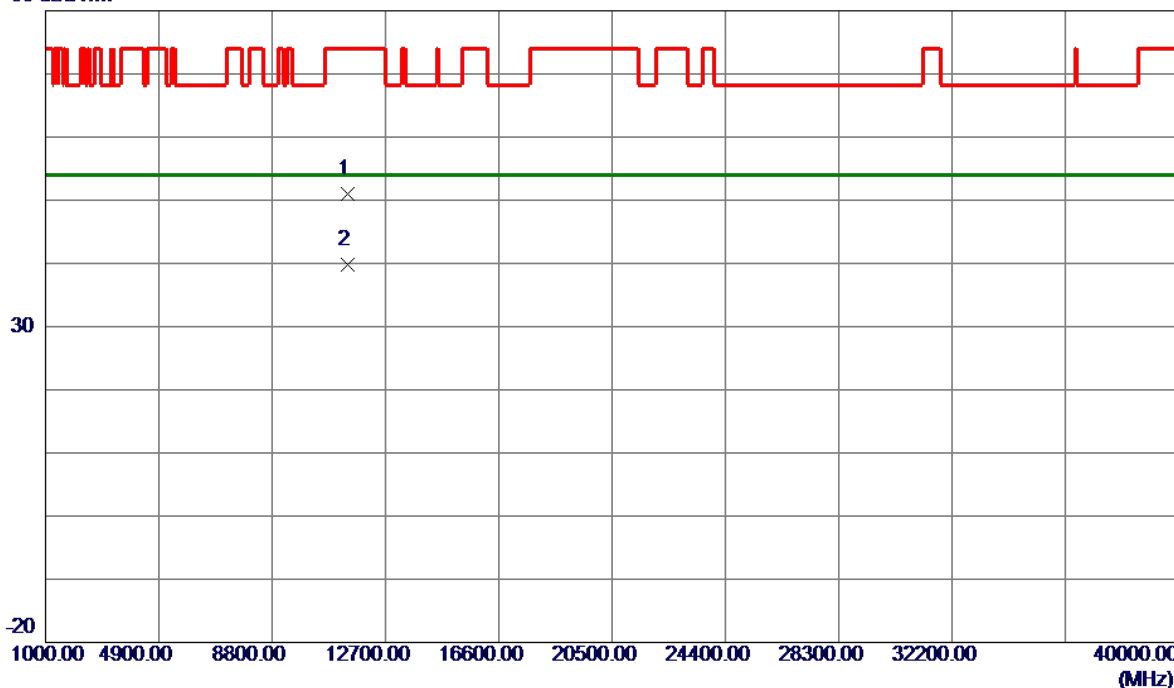


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11397.7450	38.00	13.08	51.08	74.00	-22.92	Peak	
2 *	11401.2850	26.66	13.08	39.74	54.00	-14.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

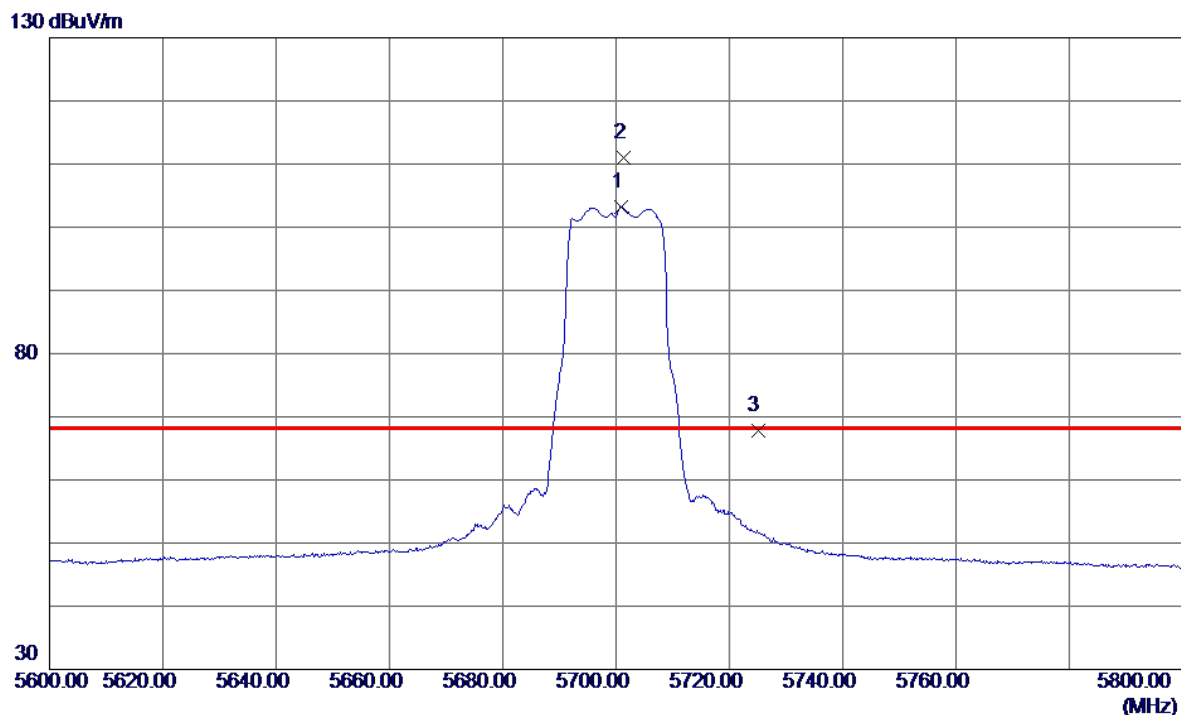


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.8000	86.77	16.46	103.23	999.00	-895.77	AVG	No Limit
2 *	5701.4000	94.61	16.47	111.08	68.20	42.88	Peak	No Limit
3	5725.0000	51.34	16.51	67.85	68.20	-0.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

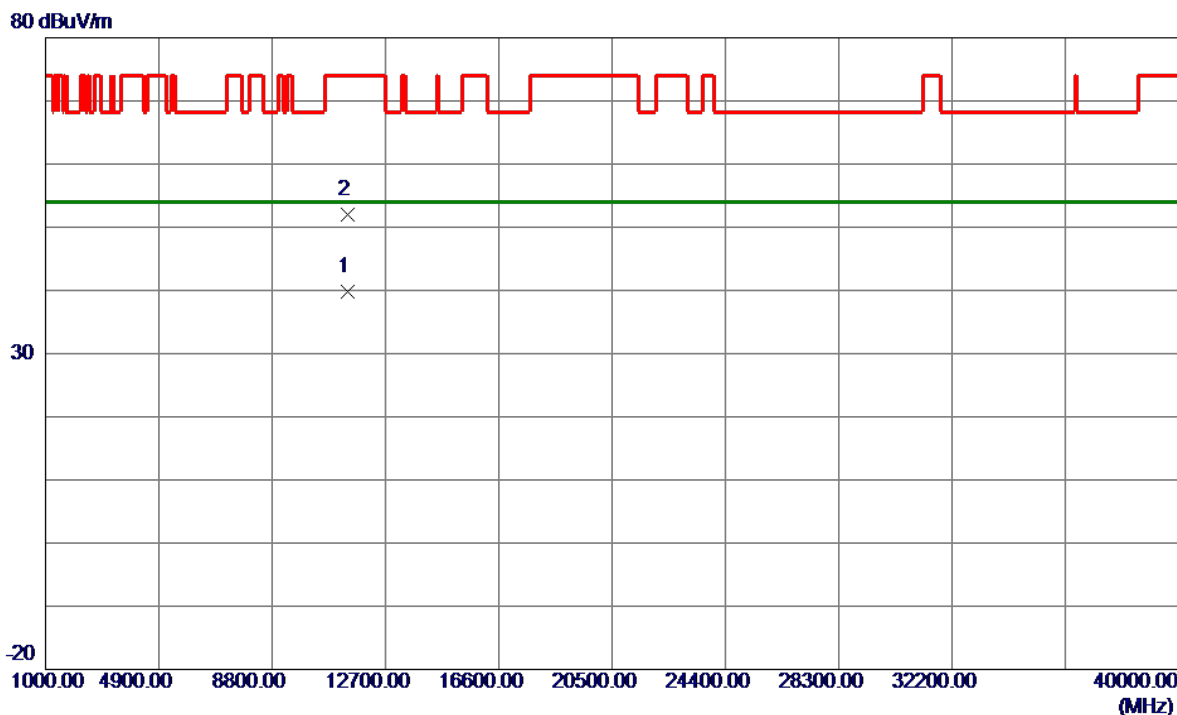


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.5000	26.70	13.08	39.78	54.00	-14.22	AVG	
2	11401.3450	38.92	13.08	52.00	74.00	-22.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

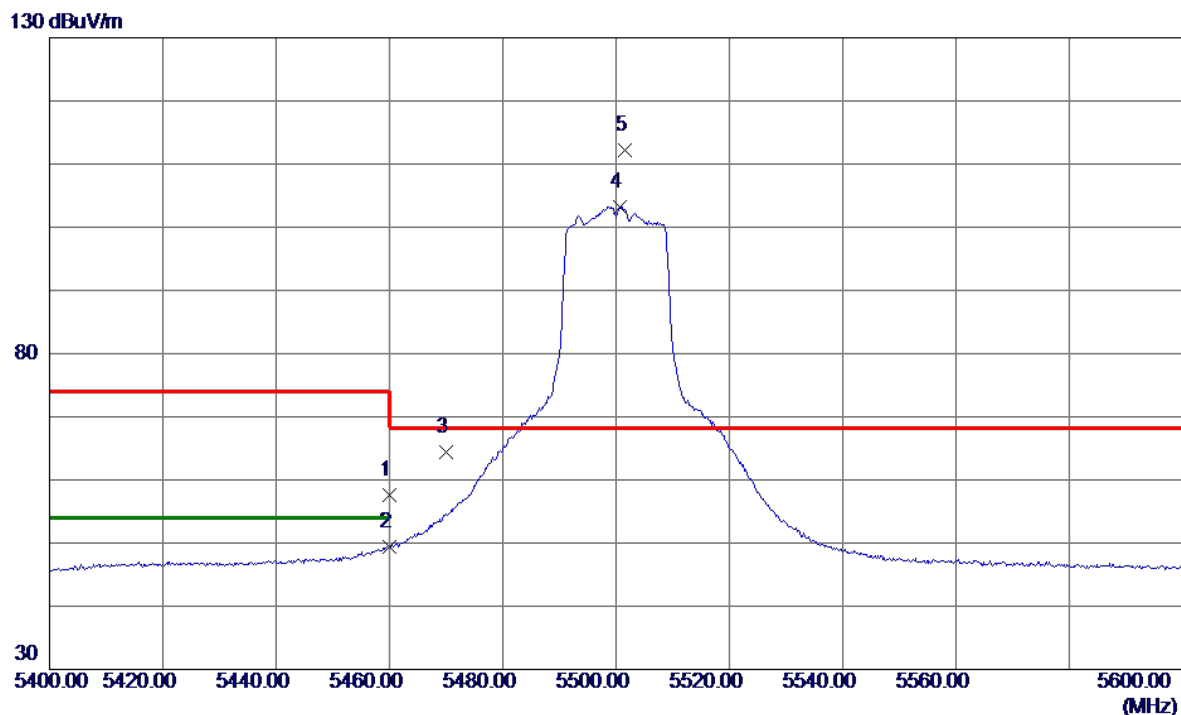


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.69	15.97	57.66	74.00	-16.34	Peak	
2	5460.0000	33.34	15.97	49.31	54.00	-4.69	AVG	
3	5470.0000	48.34	16.00	64.34	68.20	-3.86	Peak	
4	5500.6000	87.11	16.07	103.18	999.00	-895.82	AVG	No Limit
5 *	5501.6000	96.05	16.07	112.12	68.20	43.92	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

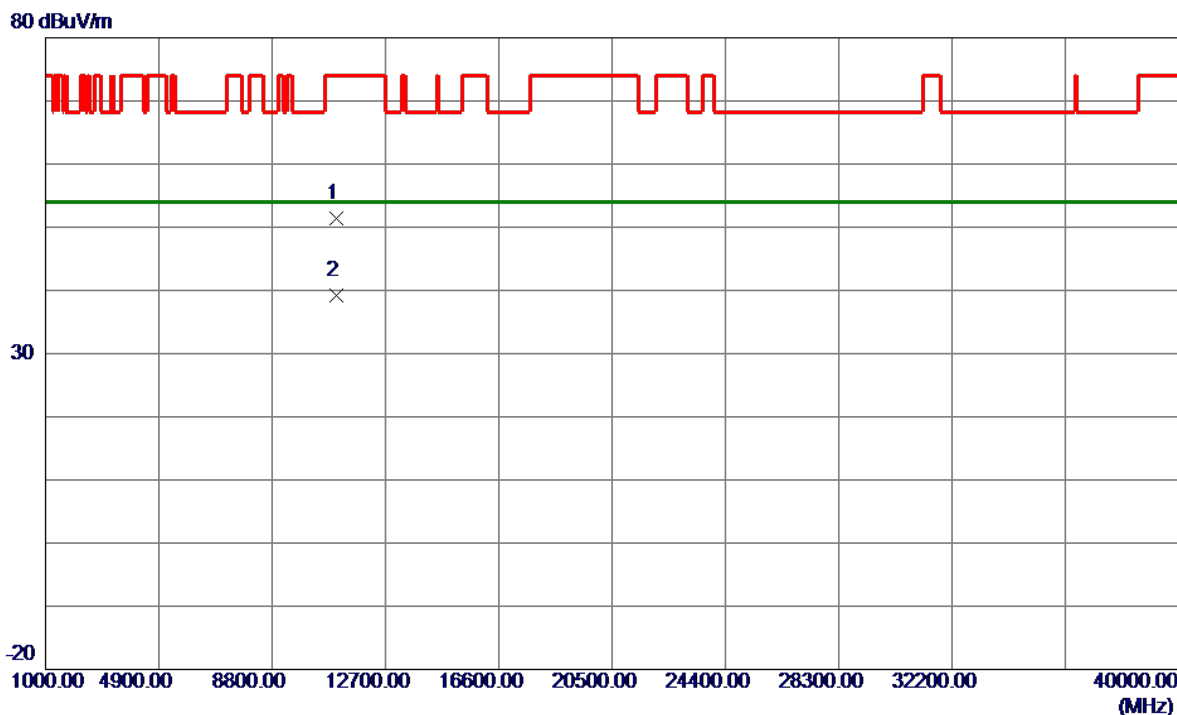


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11001.6350	38.63	12.78	51.41	74.00	-22.59	Peak	
2 *	11002.1950	26.37	12.78	39.15	54.00	-14.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

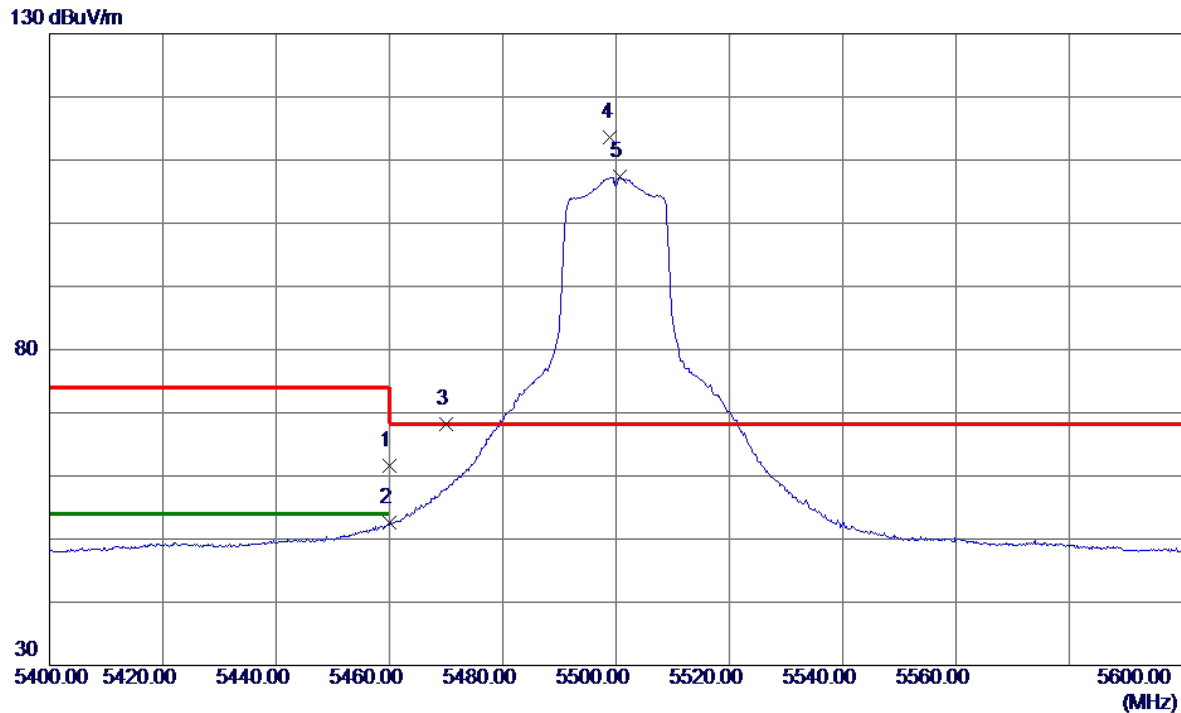


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.59	15.97	61.56	74.00	-12.44	Peak	
2	5460.0000	36.66	15.97	52.63	54.00	-1.37	AVG	
3	5470.0000	52.17	16.00	68.17	68.20	-0.03	Peak	
4 *	5499.0000	97.61	16.06	113.67	68.20	45.47	Peak	No Limit
5	5500.7000	91.28	16.07	107.35	999.00	-891.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

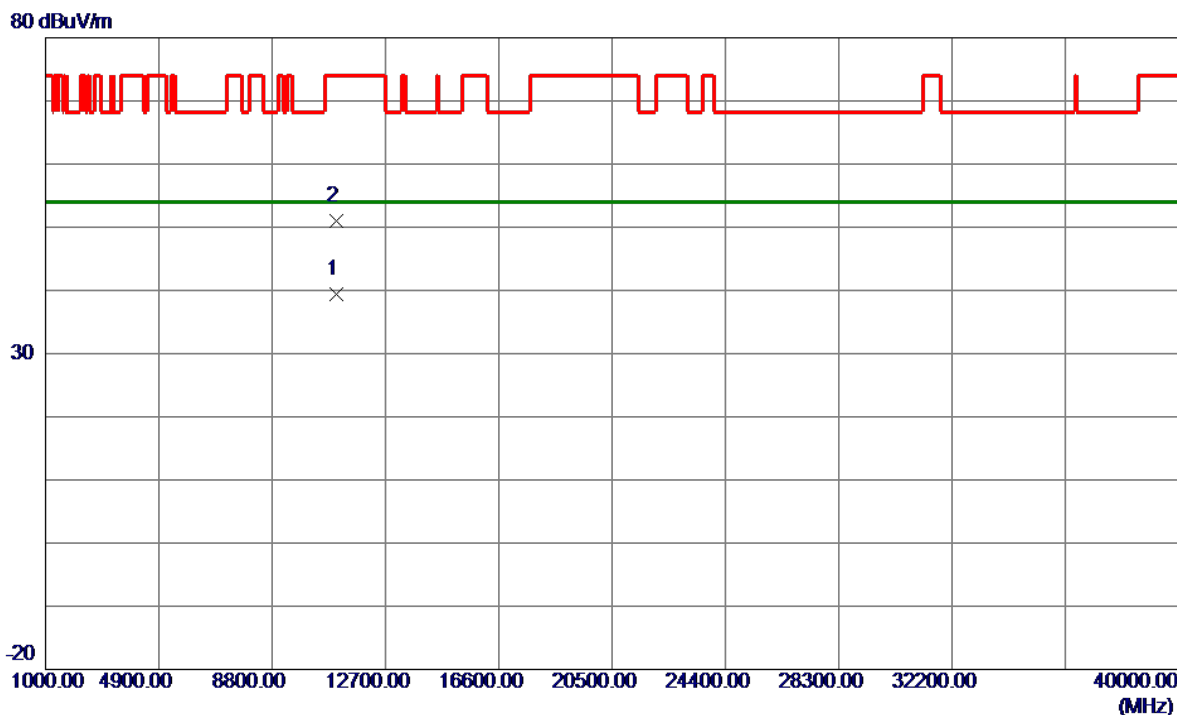


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11001.2300	26.56	12.78	39.34	54.00	-14.66	AVG	
2	11001.9550	38.30	12.78	51.08	74.00	-22.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

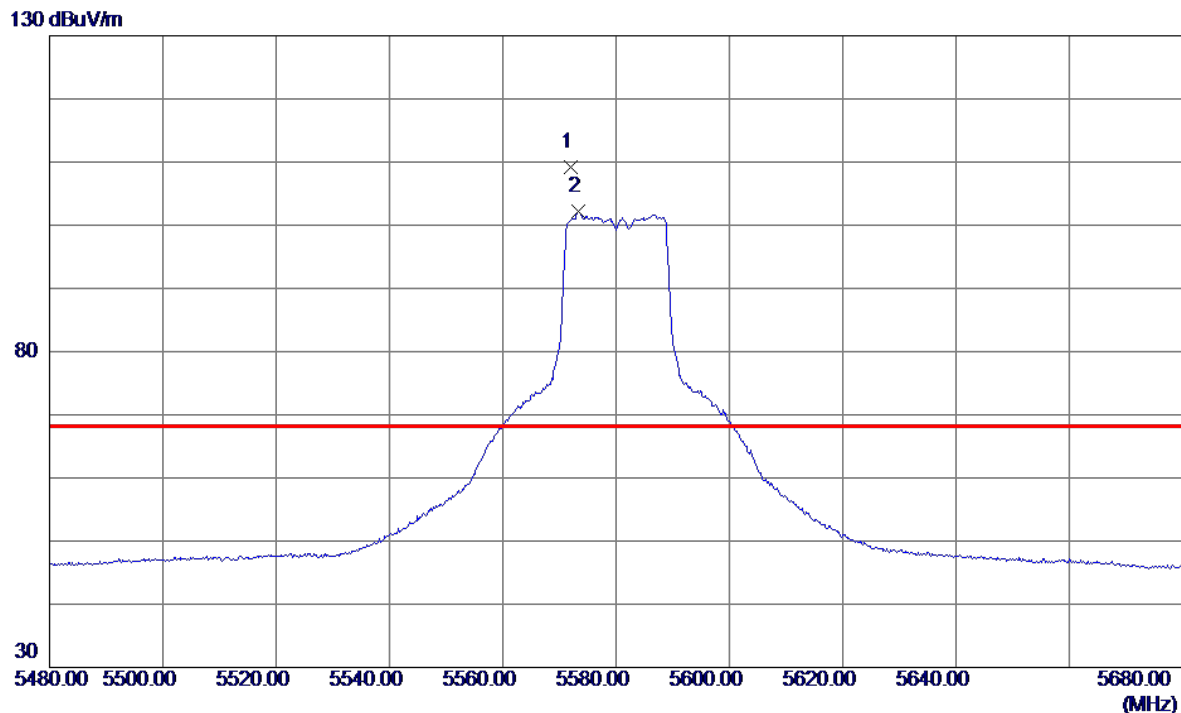


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5572.0000	93.08	16.21	109.29	68.20	41.09	Peak	No Limit
2	5573.4000	85.96	16.21	102.17	999.00	-896.83	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

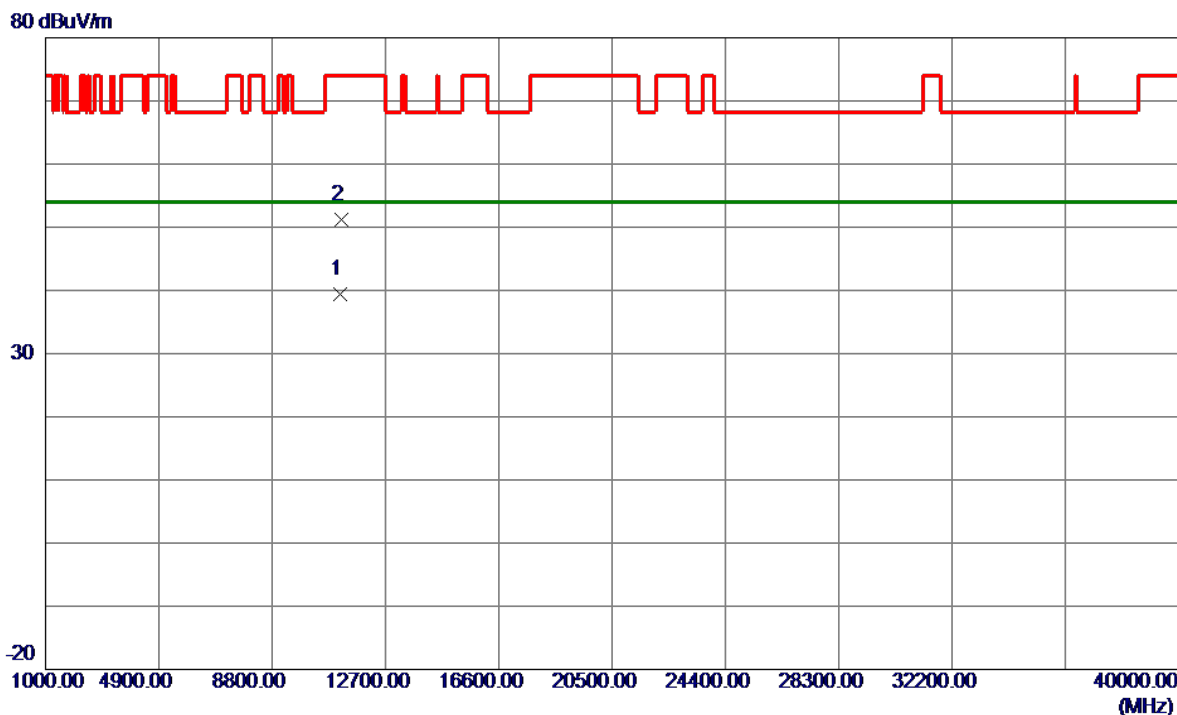


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.8500	26.46	12.90	39.36	54.00	-14.64	AVG	
2	11162.4400	38.28	12.90	51.18	74.00	-22.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

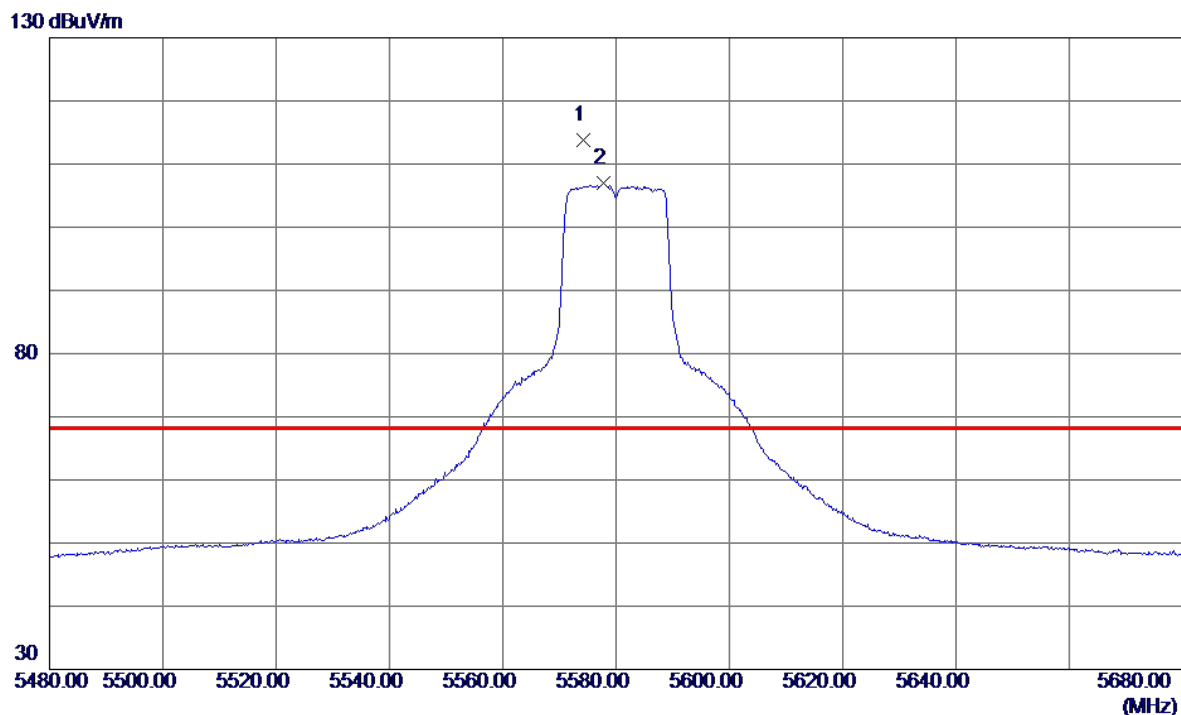


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5574.2000	97.60	16.21	113.81	68.20	45.61	Peak	No Limit
2	5577.7000	90.76	16.22	106.98	999.00	-892.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

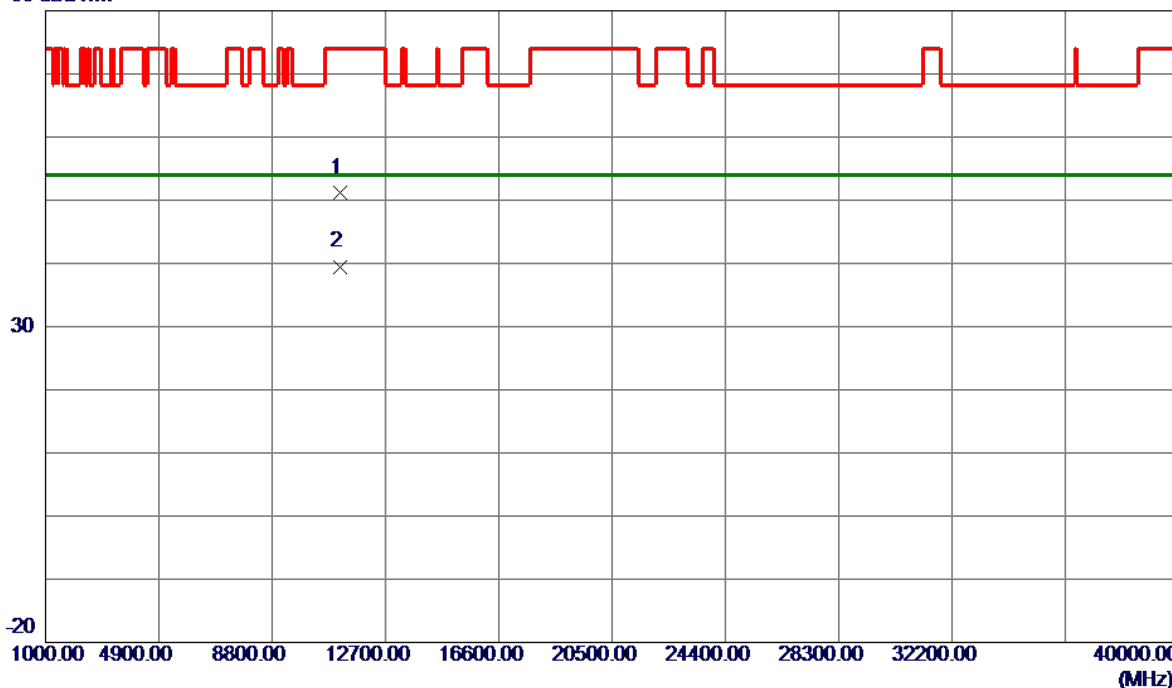


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.8450	38.39	12.90	51.29	74.00	-22.71	Peak	
2 *	11158.3850	26.60	12.90	39.50	54.00	-14.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

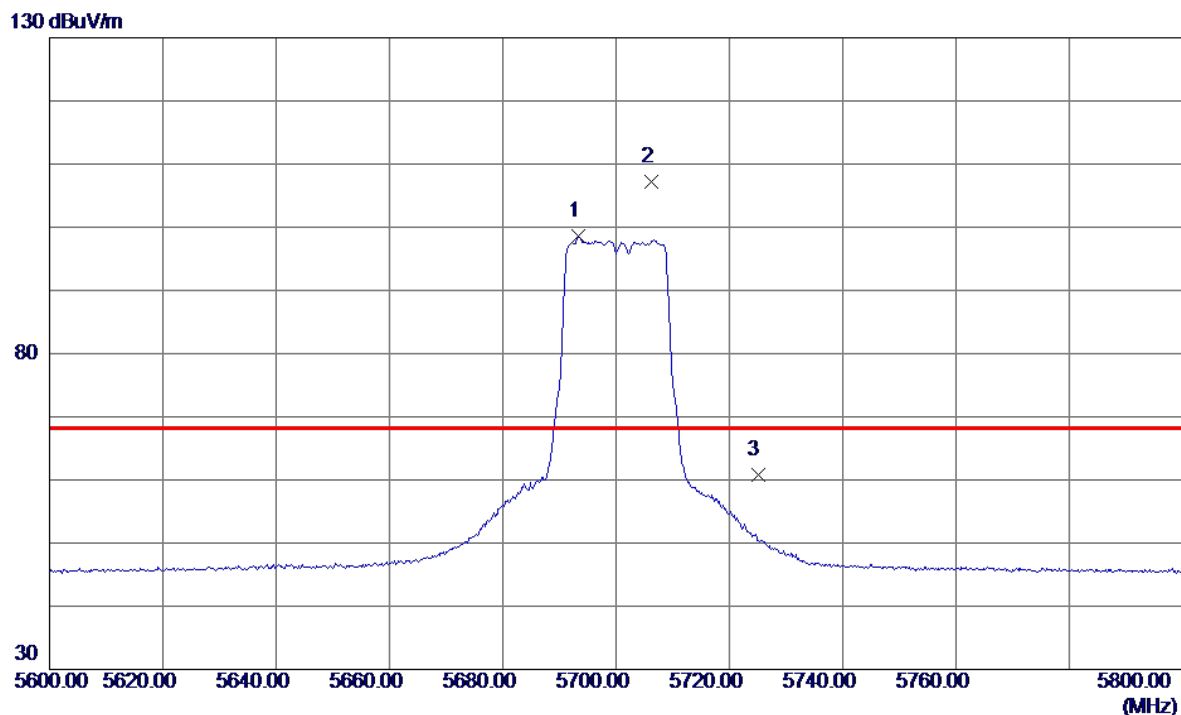


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.4000	82.08	16.45	98.53	999.00	-900.47	AVG	No Limit
2 *	5706.2000	90.78	16.48	107.26	68.20	39.06	Peak	No Limit
3	5725.0000	44.30	16.51	60.81	68.20	-7.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

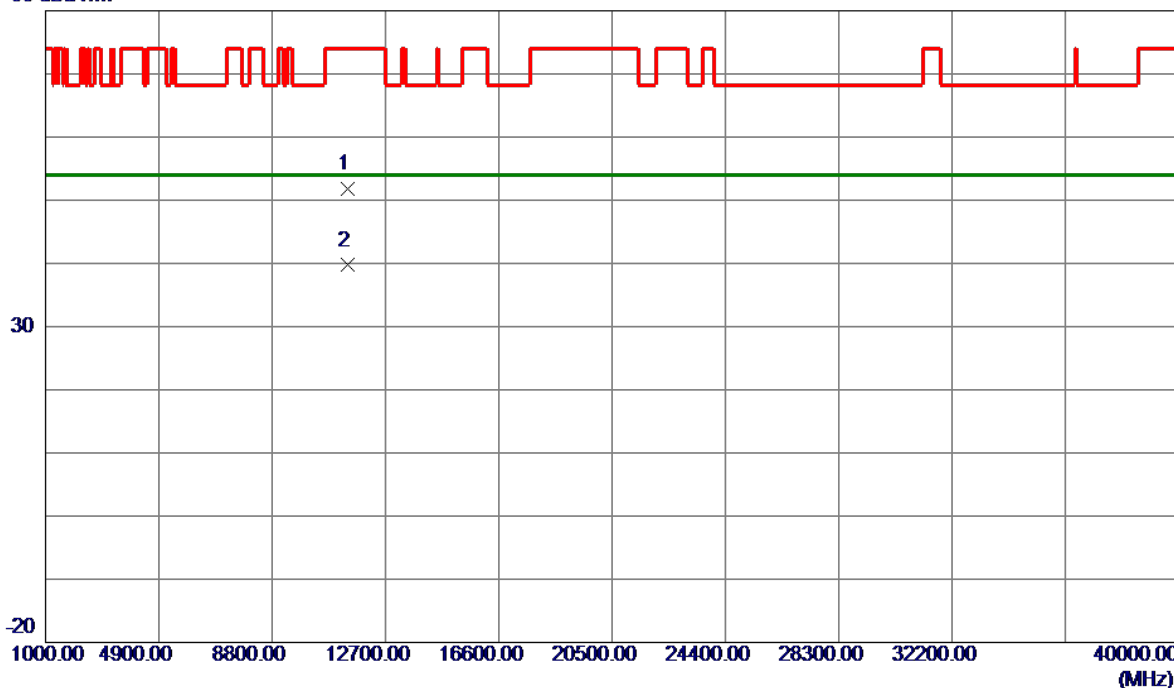


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11398.2300	38.66	13.08	51.74	74.00	-22.26	Peak	
2 *	11400.4900	26.62	13.08	39.70	54.00	-14.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

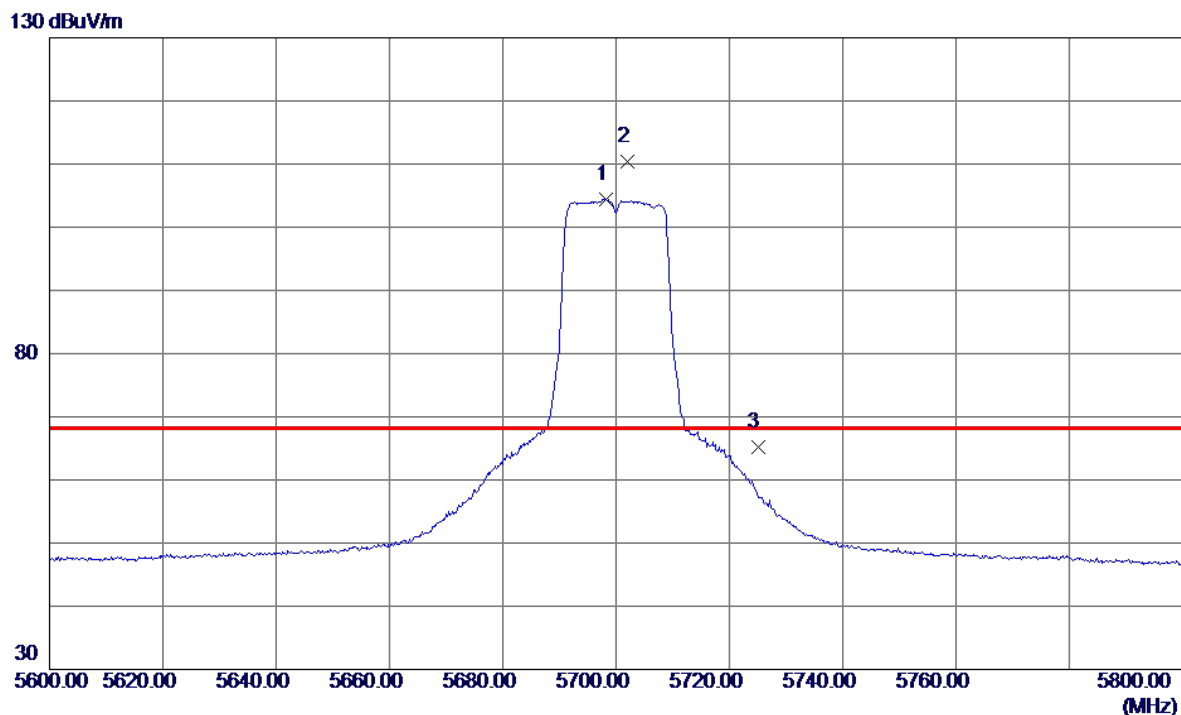


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.2000	87.92	16.46	104.38	999.00	-894.62	AVG	No Limit
2 *	5701.9000	93.93	16.47	110.40	68.20	42.20	Peak	No Limit
3	5725.0000	48.78	16.51	65.29	68.20	-2.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

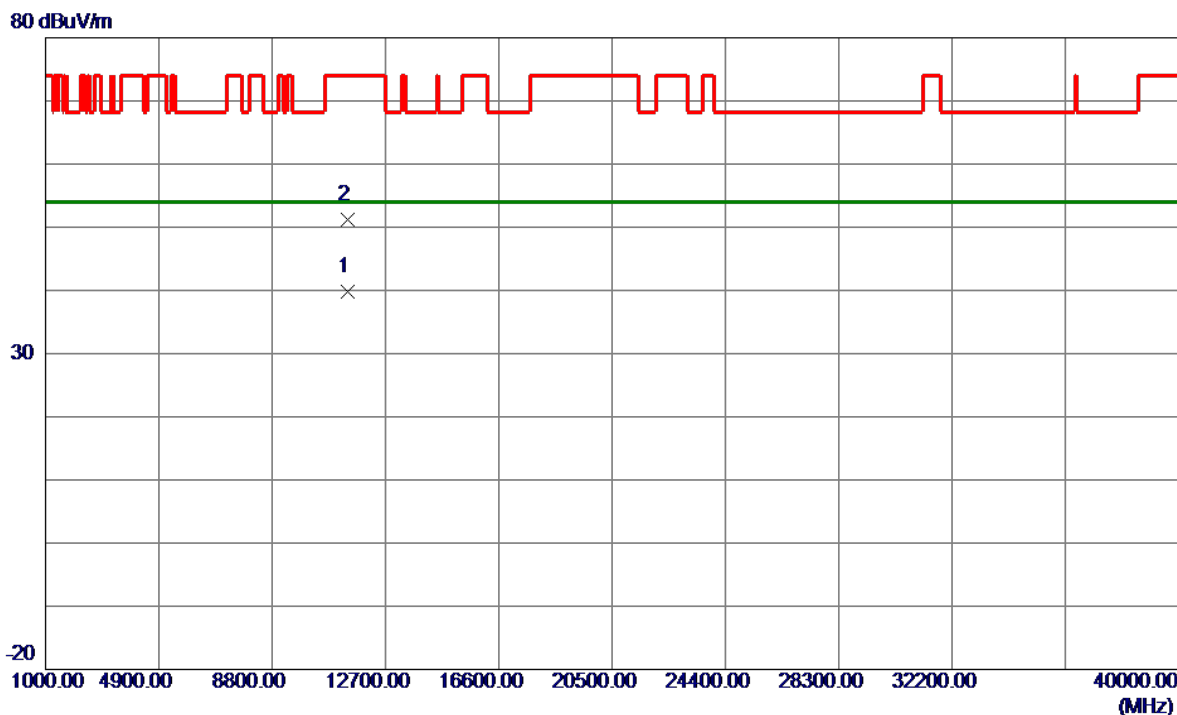


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0250	26.71	13.08	39.79	54.00	-14.21	AVG	
2	11402.3500	38.21	13.08	51.29	74.00	-22.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

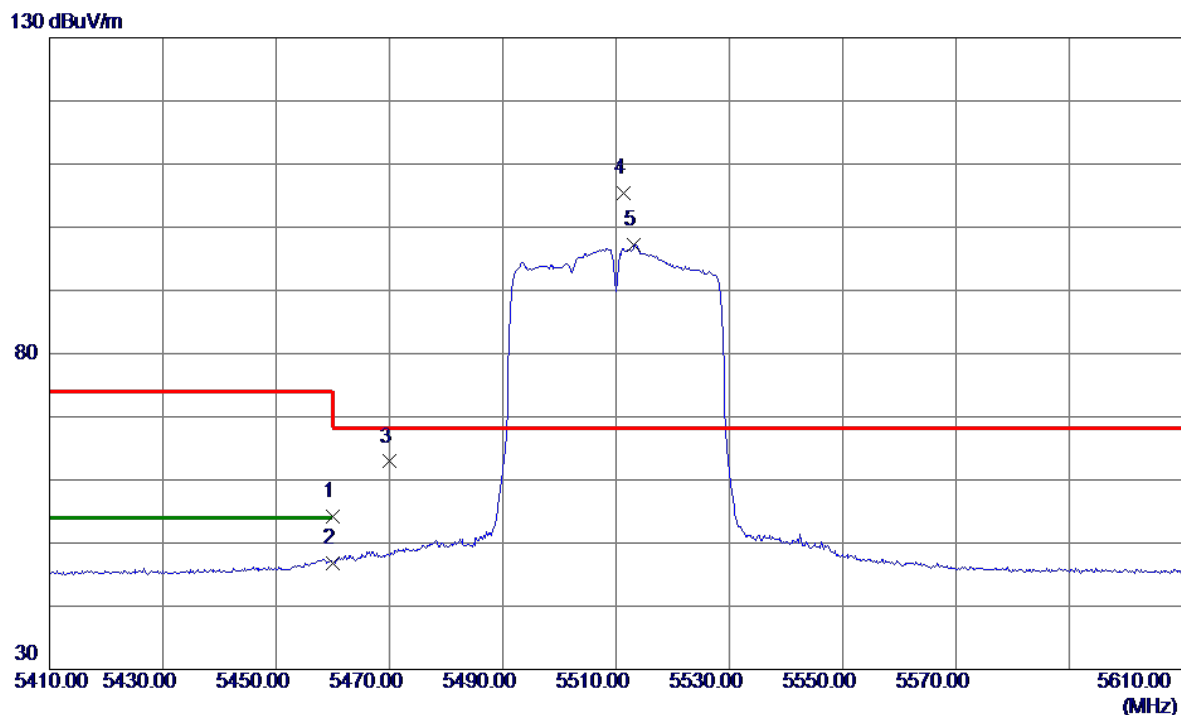


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.32	15.97	54.29	74.00	-19.71	Peak	
2	5460.0000	30.88	15.97	46.85	54.00	-7.15	AVG	
3	5470.0000	46.90	16.00	62.90	68.20	-5.30	Peak	
4 *	5511.4000	89.39	16.09	105.48	68.20	37.28	Peak	No Limit
5	5513.2000	81.15	16.09	97.24	999.00	-901.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

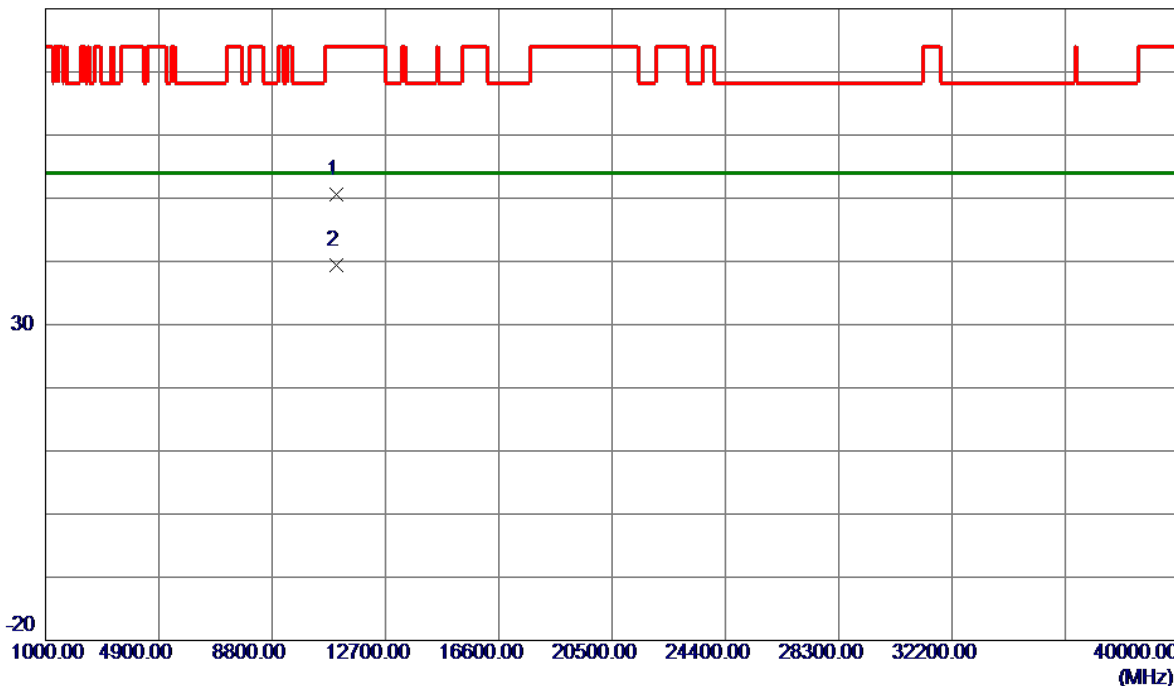


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11019.6700	37.87	12.79	50.66	74.00	-23.34	Peak	
2 *	11019.7550	26.56	12.79	39.35	54.00	-14.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

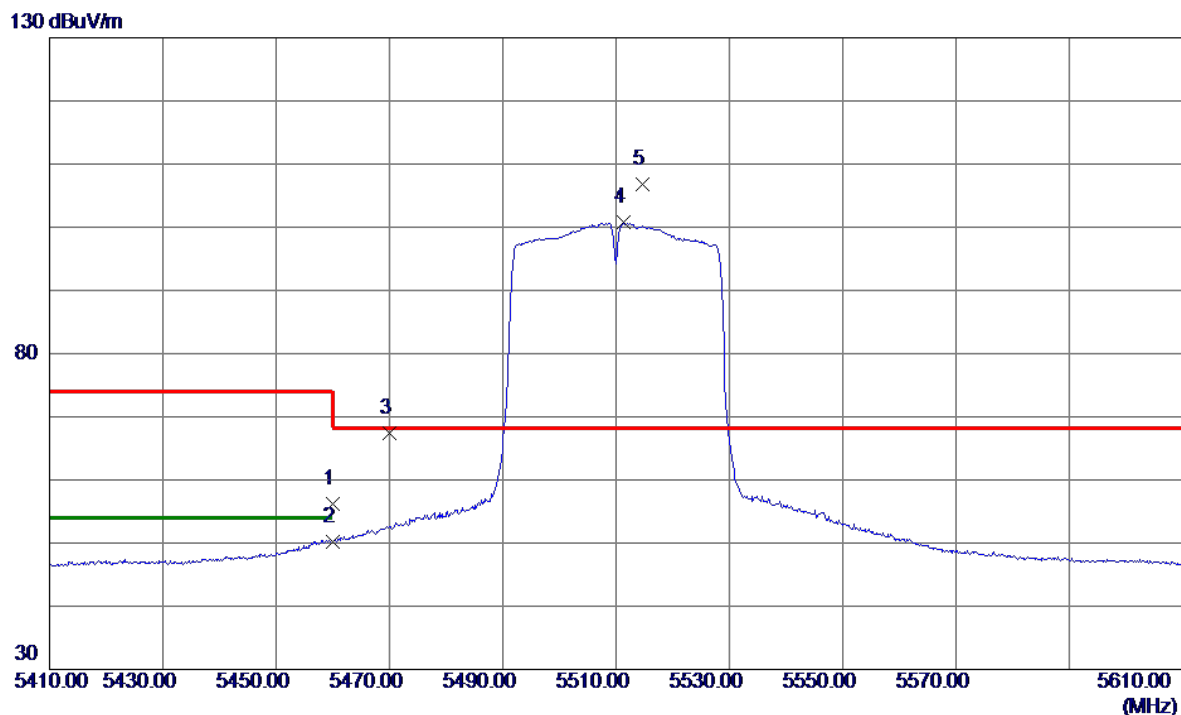


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.23	15.97	56.20	74.00	-17.80	Peak	
2	5460.0000	34.24	15.97	50.21	54.00	-3.79	AVG	
3	5470.0000	51.44	16.00	67.44	68.20	-0.76	Peak	
4	5511.4000	84.63	16.09	100.72	999.00	-898.28	AVG	No Limit
5 *	5514.7000	90.76	16.09	106.85	68.20	38.65	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

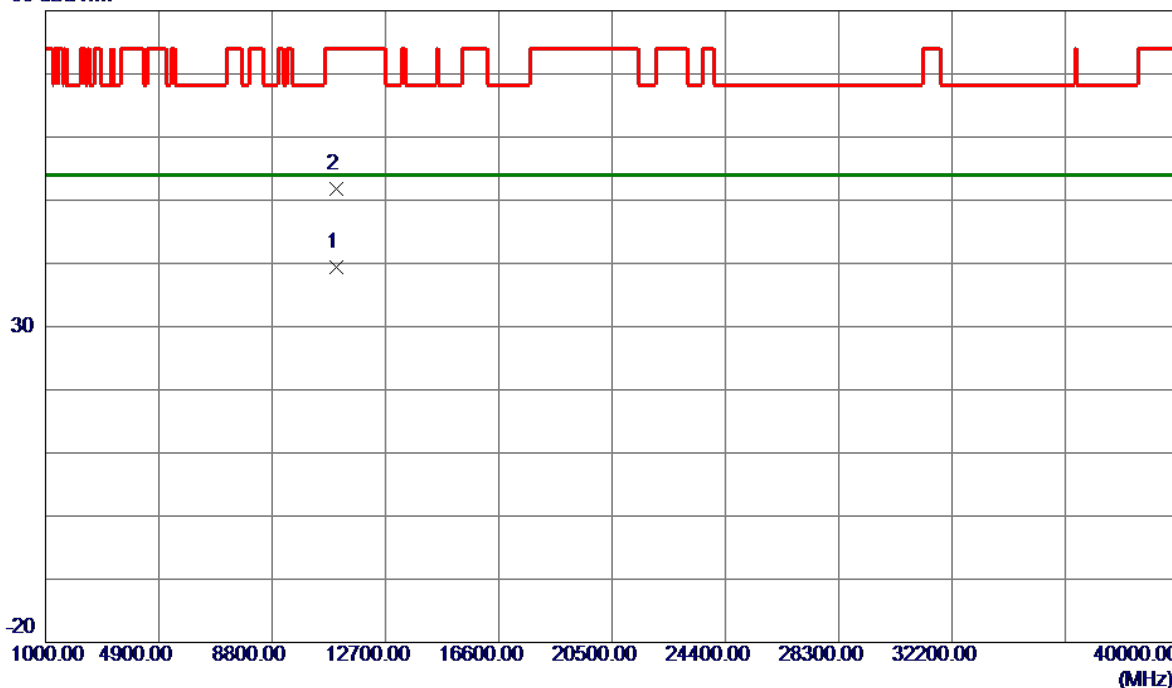


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11018.9650	26.68	12.79	39.47	54.00	-14.53	AVG	
2	11019.3949	38.99	12.79	51.78	74.00	-22.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

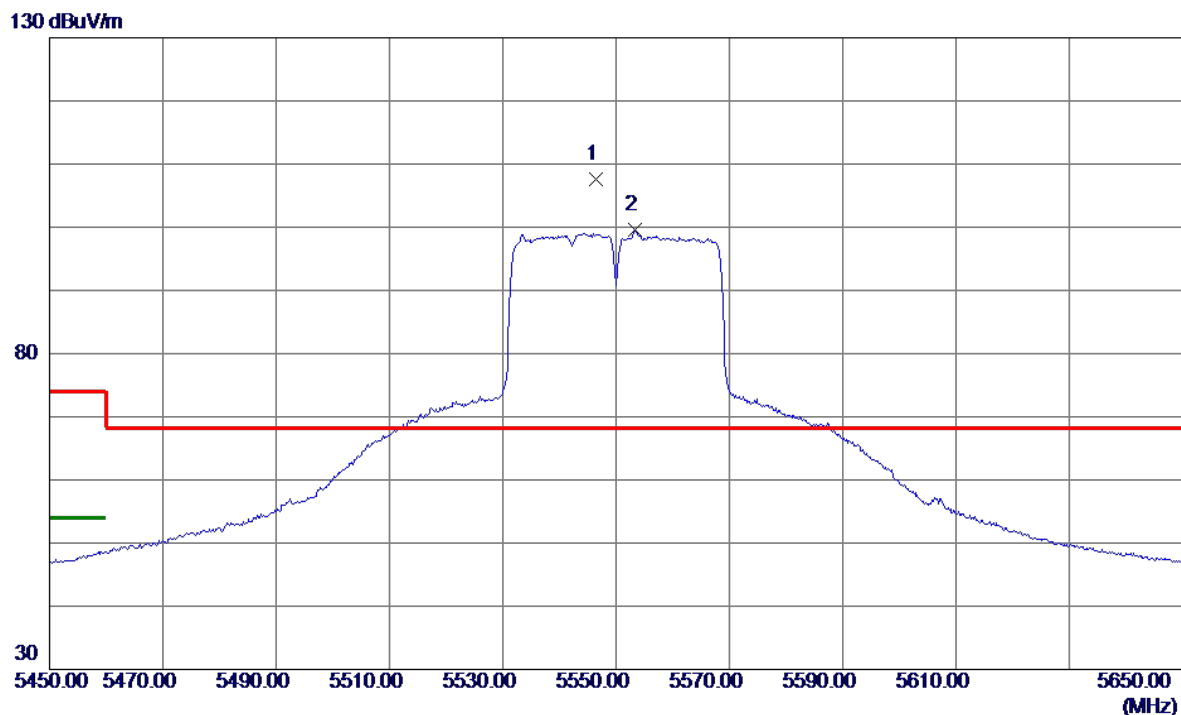


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5546.4000	91.53	16.16	107.69	68.20	39.49	Peak	No Limit
2	5553.4000	83.42	16.17	99.59	999.00	-899.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

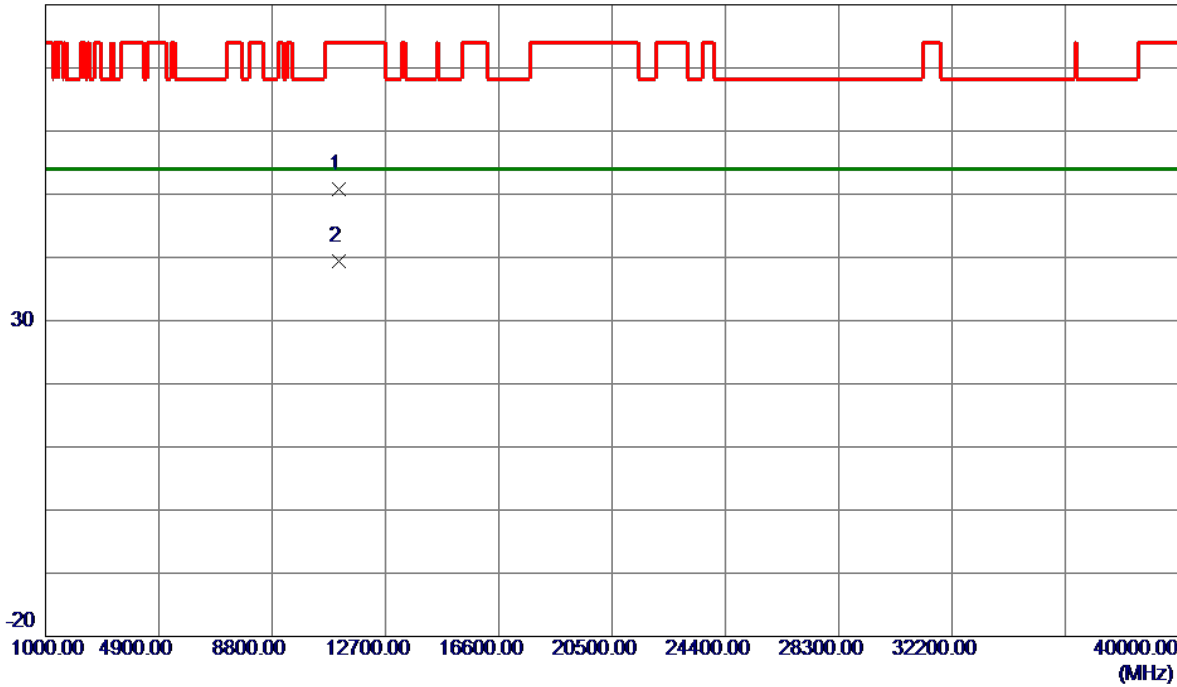


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11098.4150	37.90	12.85	50.75	74.00	-23.25	Peak	
2 *	11099.5800	26.48	12.85	39.33	54.00	-14.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

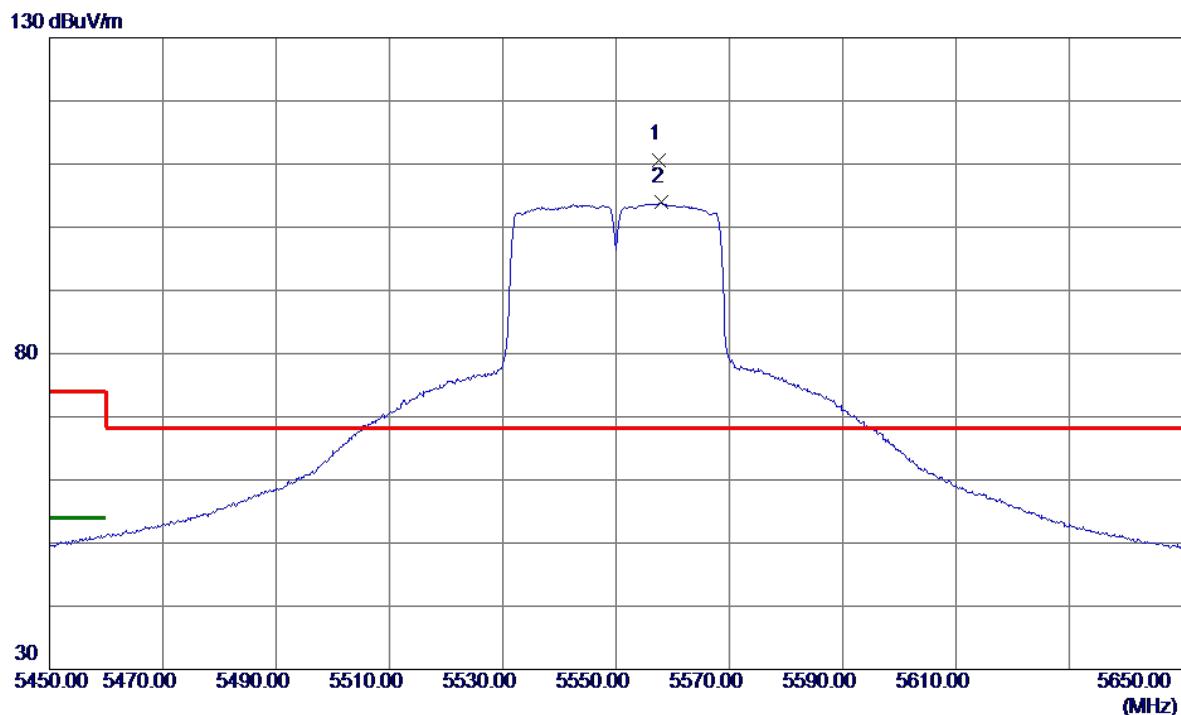


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5557.6000	94.52	16.18	110.70	68.20	42.50	Peak	No Limit
2	5557.9000	87.76	16.18	103.94	999.00	-895.06	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

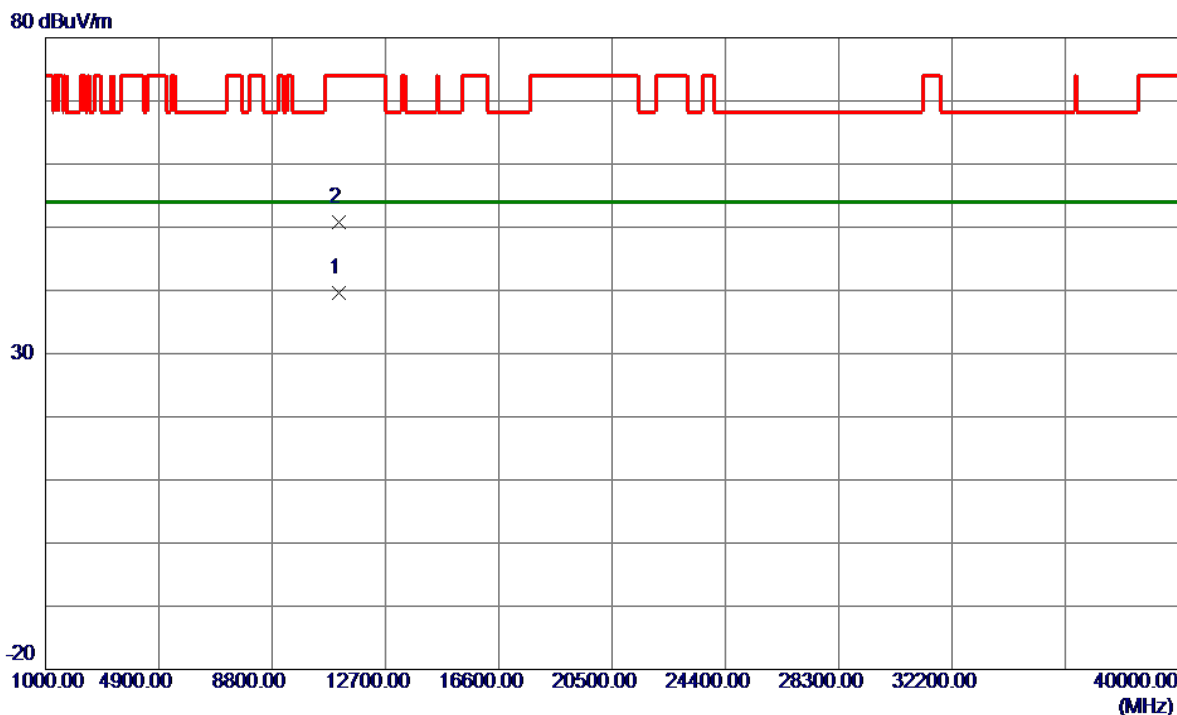


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.5750	26.71	12.86	39.57	54.00	-14.43	AVG	
2	11101.0250	37.94	12.86	50.80	74.00	-23.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

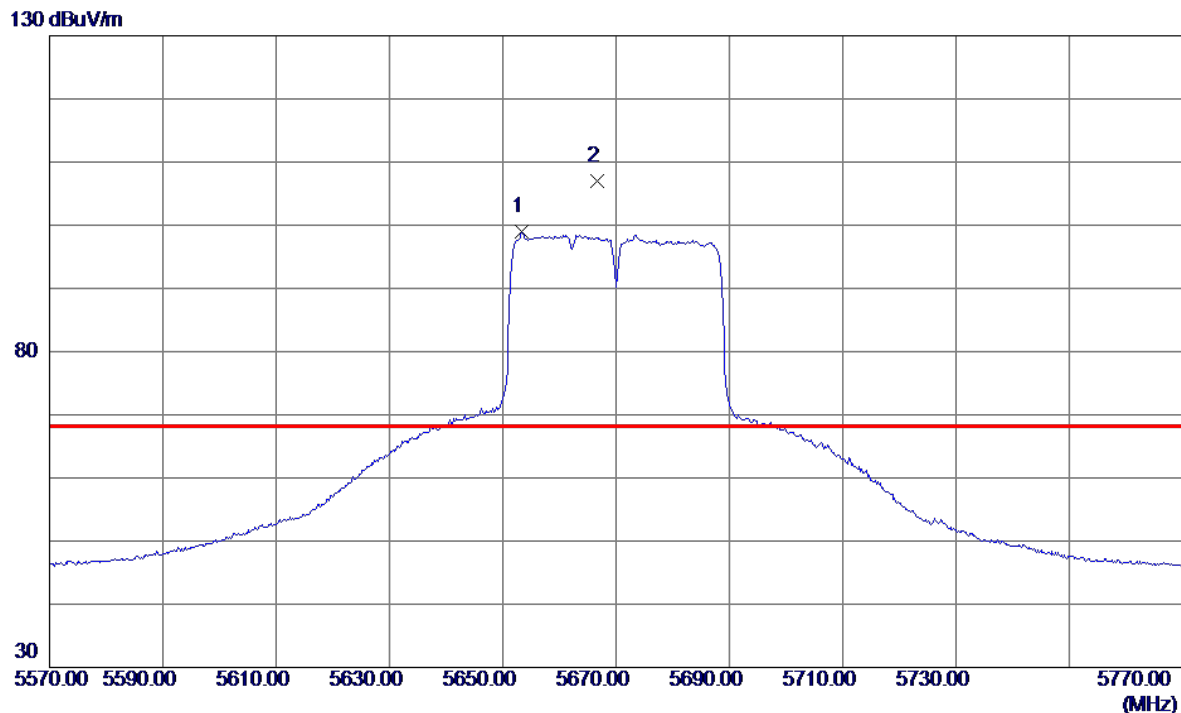


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5653.4000	82.62	16.37	98.99	999.00	-900.01	AVG	No Limit
2 *	5666.6000	90.69	16.40	107.09	68.20	38.89	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

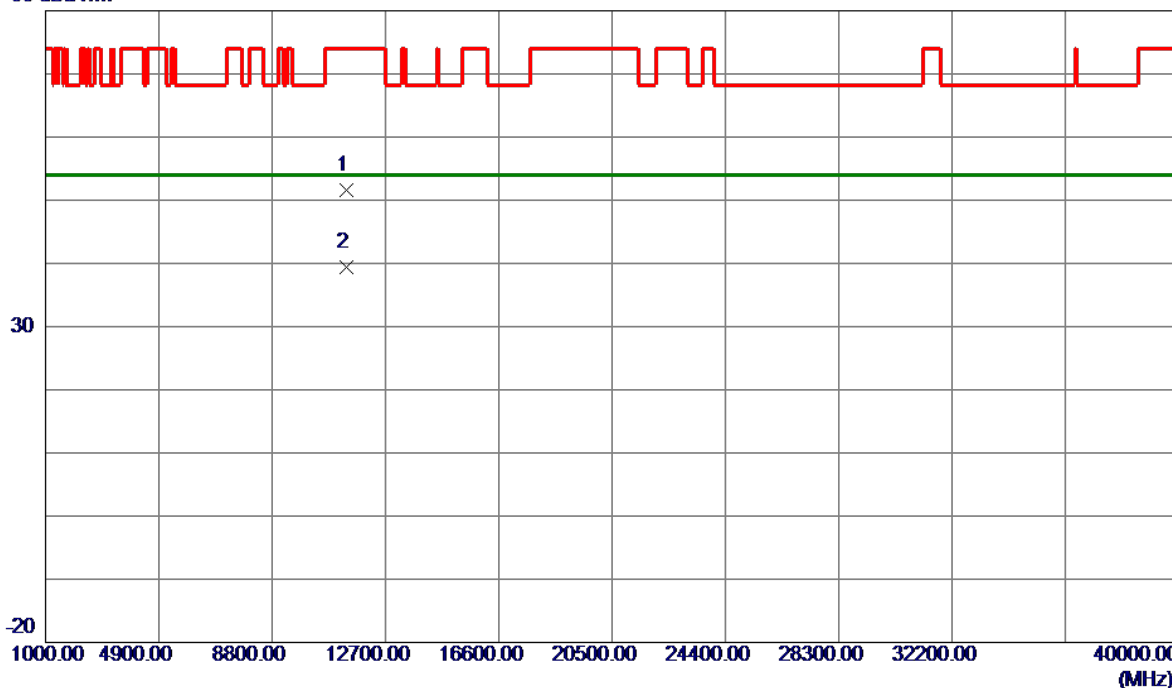


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.1950	38.49	13.04	51.53	74.00	-22.47	Peak	
2 *	11341.1800	26.28	13.04	39.32	54.00	-14.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

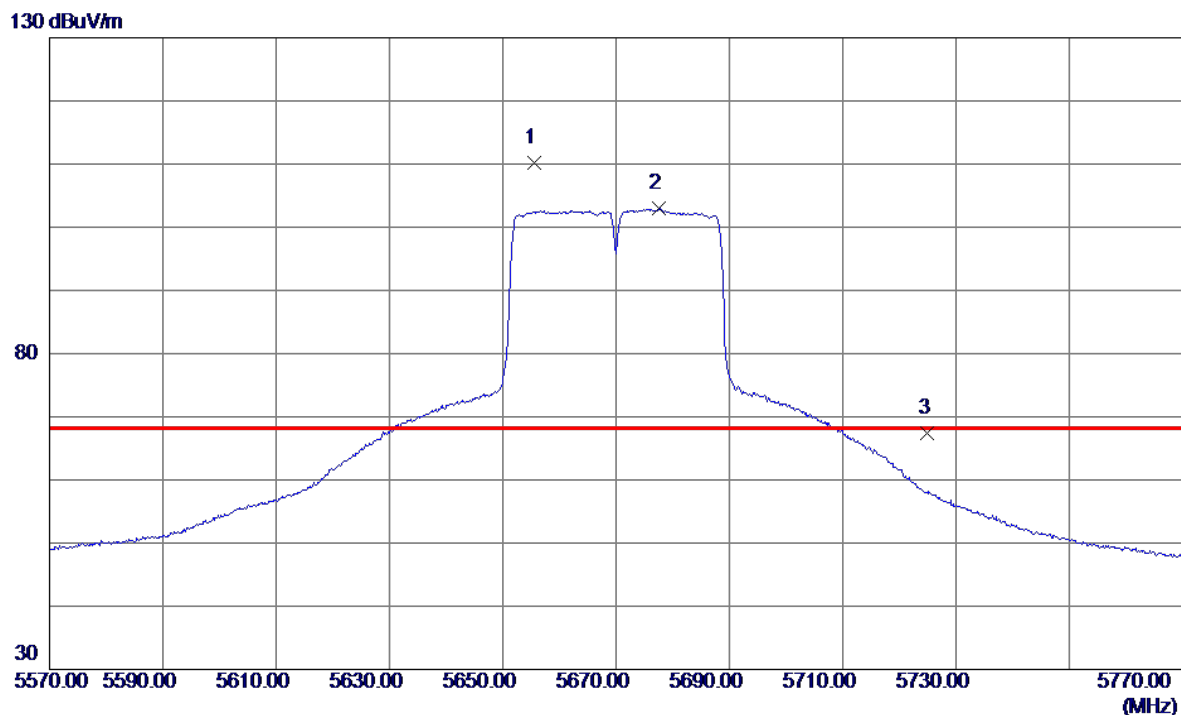


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5655.6000	93.82	16.37	110.19	68.20	41.99	Peak	No Limit
2	5677.6000	86.65	16.42	103.07	999.00	-895.93	AVG	No Limit
3	5725.0000	50.95	16.51	67.46	68.20	-0.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

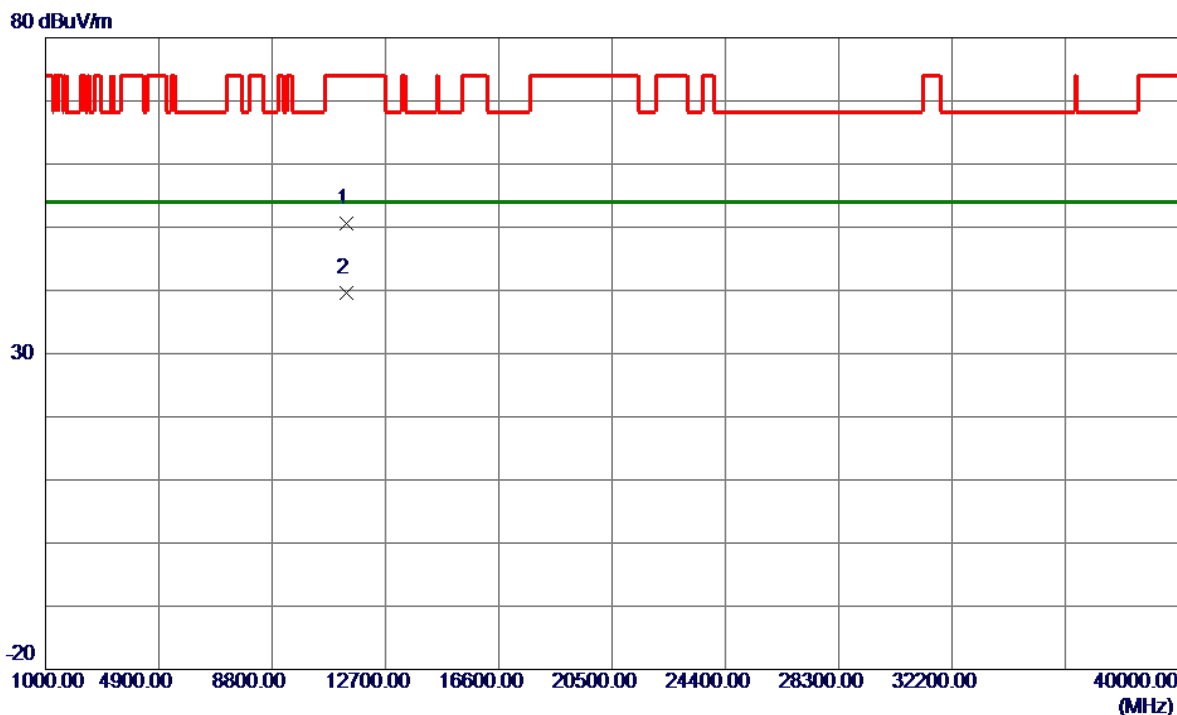


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11339.1900	37.54	13.03	50.57	74.00	-23.43	Peak	
2 *	11341.5800	26.52	13.04	39.56	54.00	-14.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

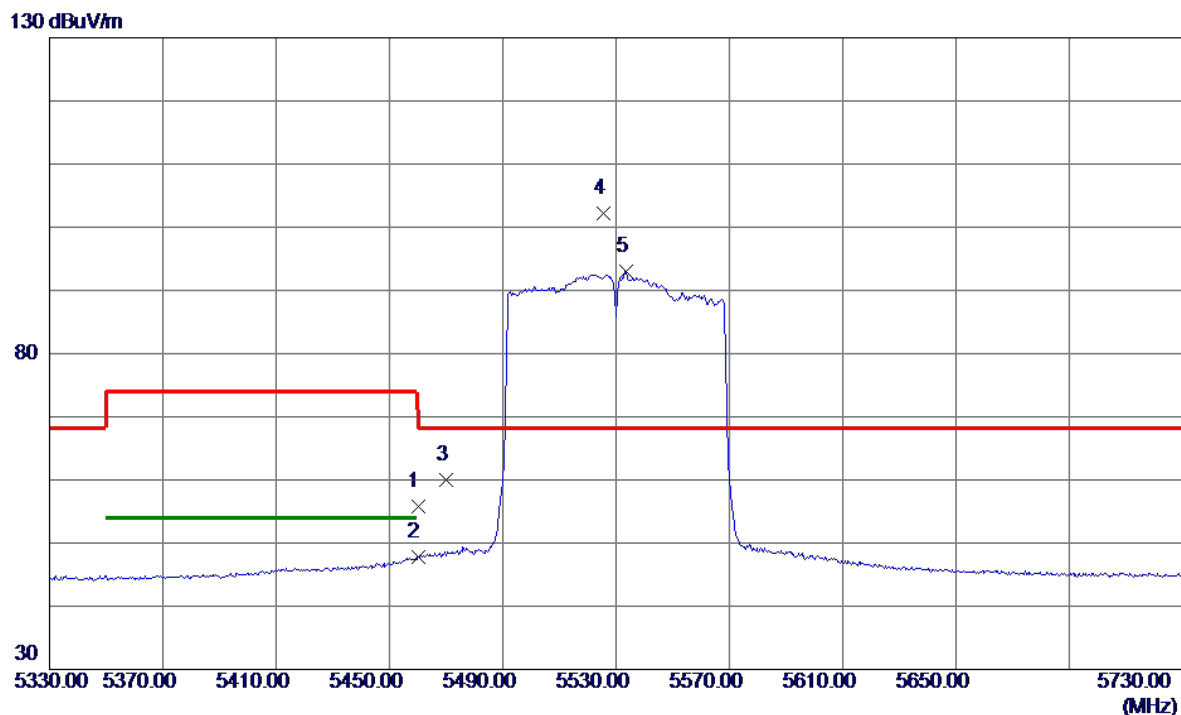


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.90	15.97	55.87	74.00	-18.13	Peak	
2	5460.0000	31.80	15.97	47.77	54.00	-6.23	AVG	
3	5470.0000	43.94	16.00	59.94	68.20	-8.26	Peak	
4 *	5525.6000	85.99	16.12	102.11	68.20	33.91	Peak	No Limit
5	5533.6000	76.94	16.13	93.07	999.00	-905.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

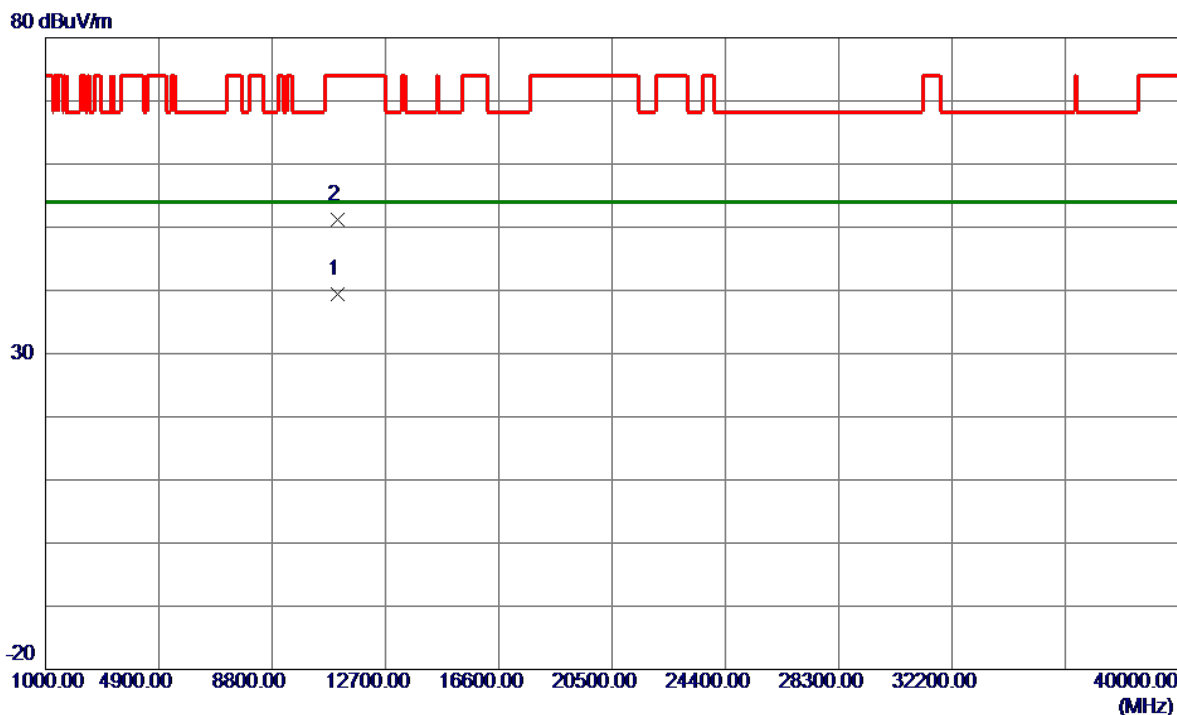


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0500	26.53	12.82	39.35	54.00	-14.65	AVG	
2	11062.0850	38.40	12.83	51.23	74.00	-22.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

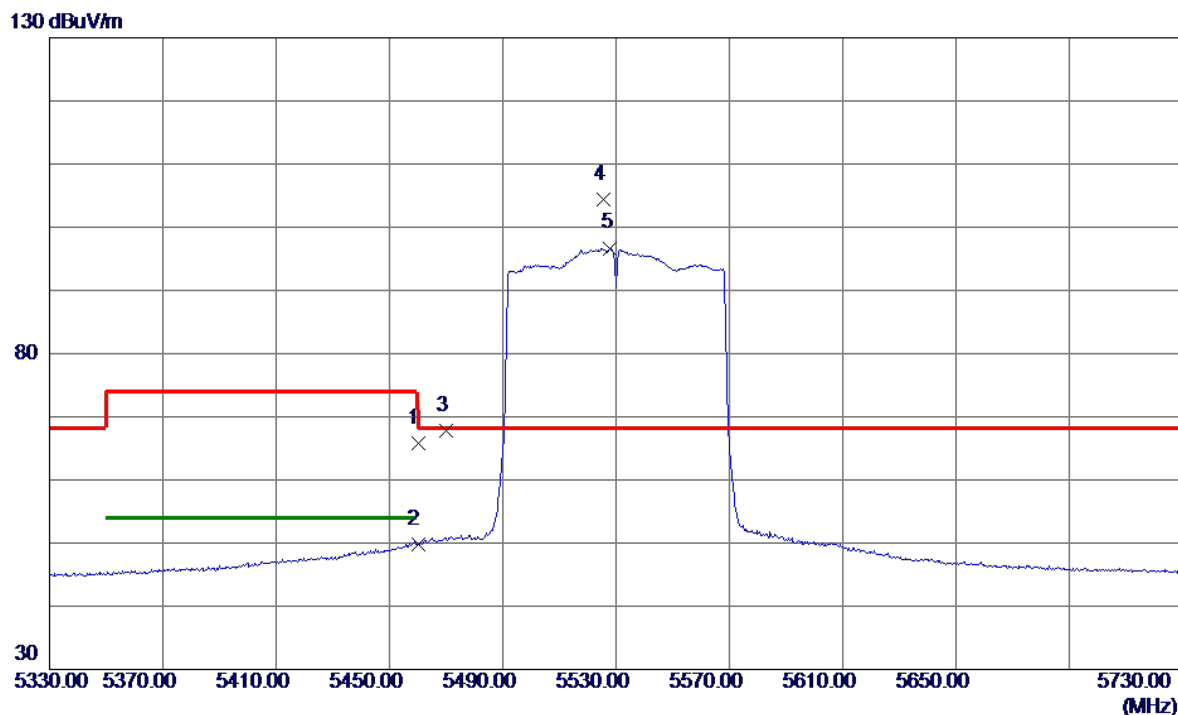


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	49.77	15.97	65.74	74.00	-8.26	Peak	
2	5460.0000	33.86	15.97	49.83	54.00	-4.17	AVG	
3	5470.0000	51.87	16.00	67.87	68.20	-0.33	Peak	
4 *	5525.6000	88.19	16.12	104.31	68.20	36.11	Peak	No Limit
5	5528.0000	80.58	16.12	96.70	999.00	-902.30	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

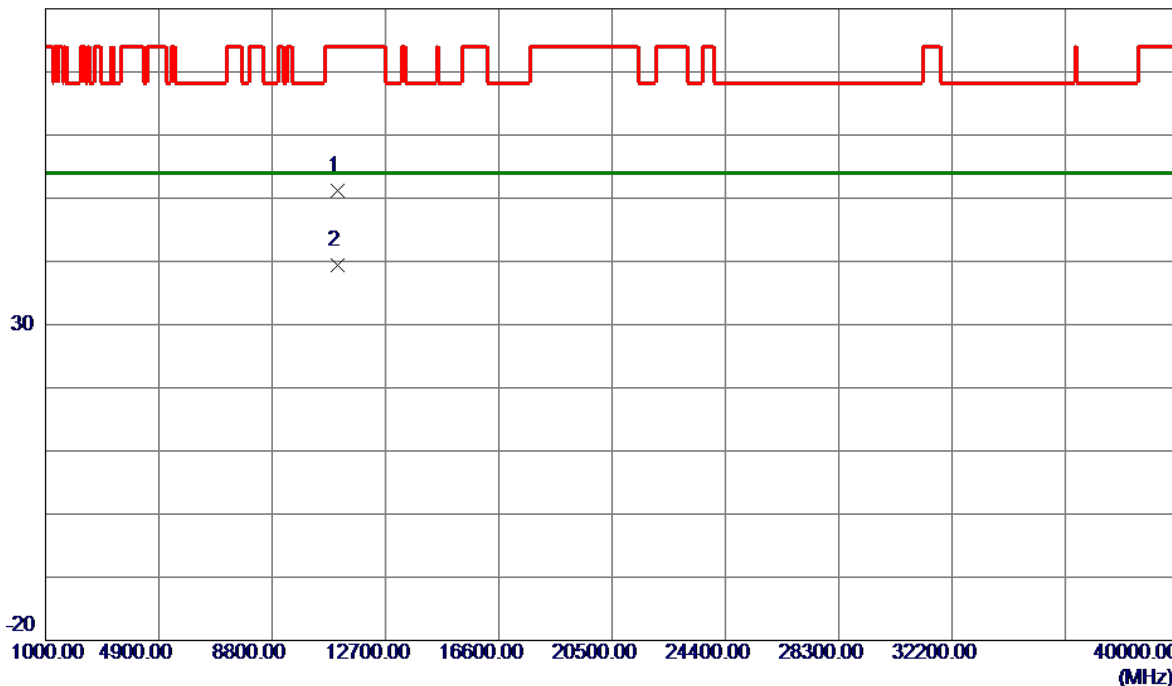


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11058.1700	38.38	12.82	51.20	74.00	-22.80	Peak	
2 *	11060.9750	26.55	12.83	39.38	54.00	-14.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

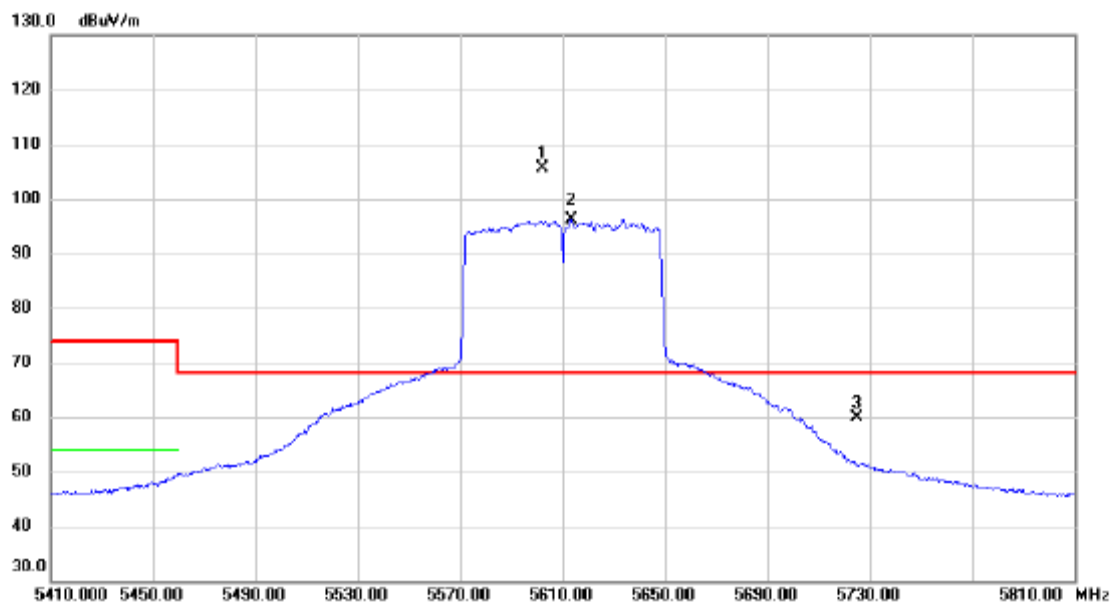


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5602.400	89.25	16.27	105.52	68.20	37.32	peak	No Limit
2 X	5613.600	79.92	16.30	96.22	68.20	28.02	AVG	No Limit
3	5725.000	43.37	16.51	59.88	68.20	-8.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

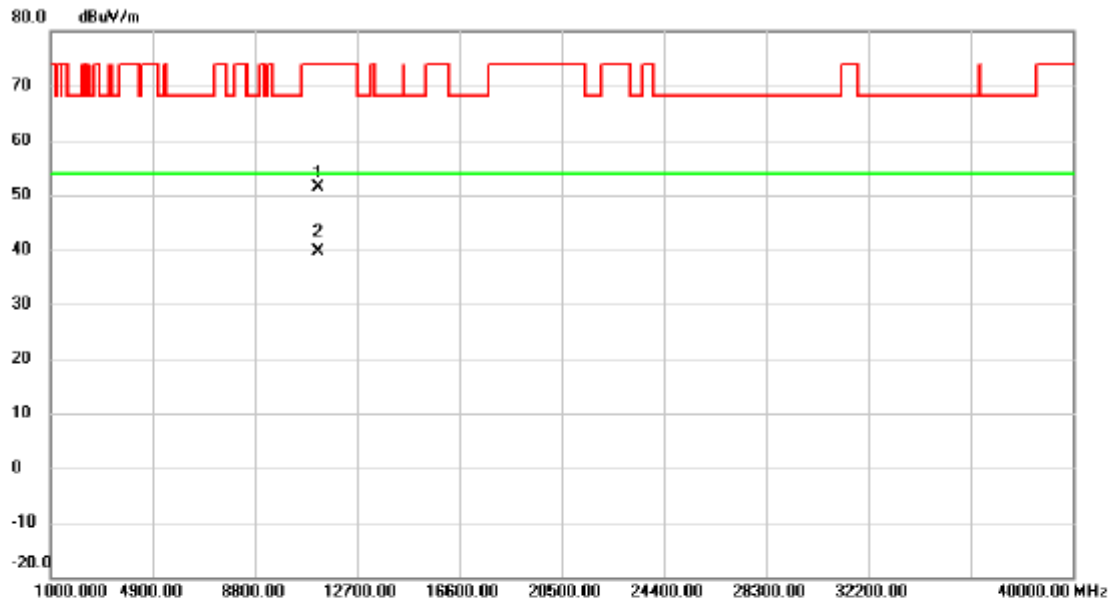


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.165	38.51	12.94	51.45	74.00	-22.55	peak	
2	*	11222.055	26.80	12.94	39.74	54.00	-14.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

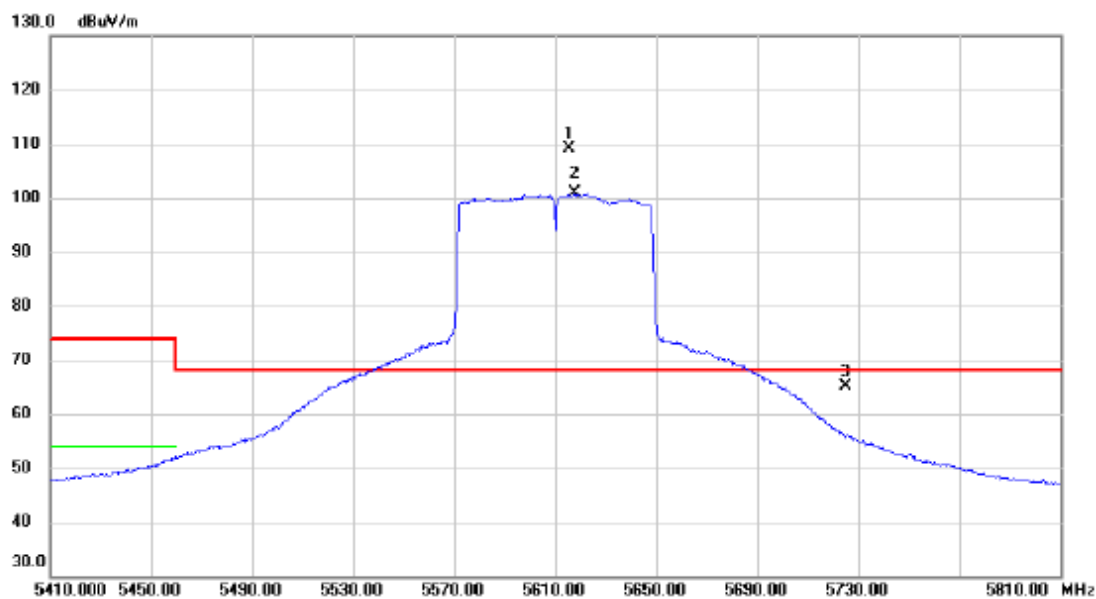


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5615.600	92.78	16.30	109.08	68.20	40.88	peak	No Limit
2	X	5617.600	84.47	16.30	100.77	68.20	32.57	AVG	No Limit
3		5725.000	48.61	16.51	65.12	68.20	-3.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

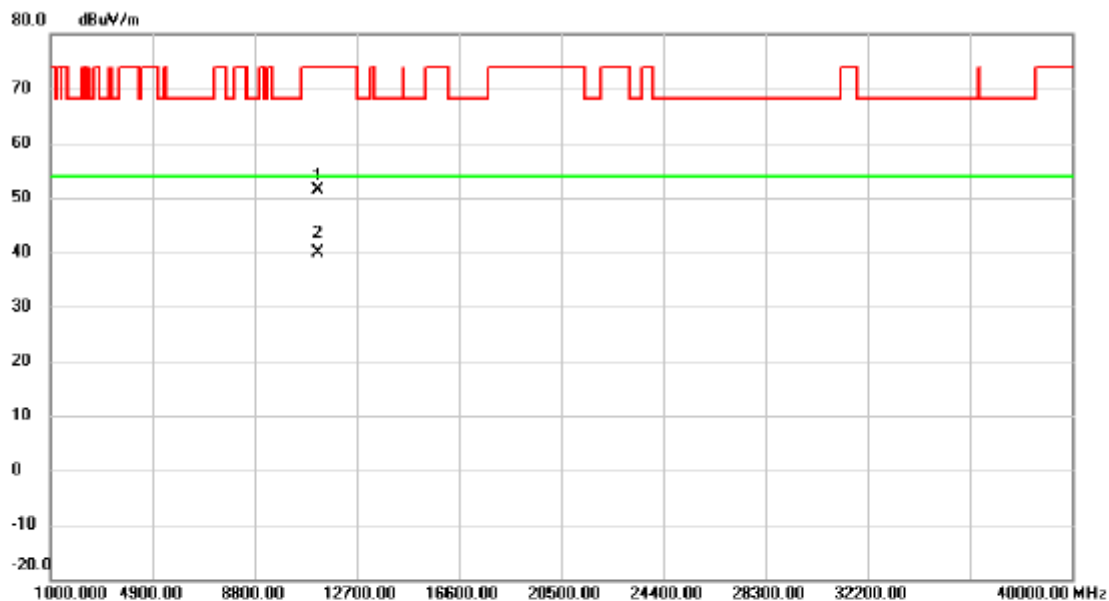


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11221.495	38.40	12.94	51.34	74.00	-22.66	peak	
2	*	11222.475	26.84	12.94	39.78	54.00	-14.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

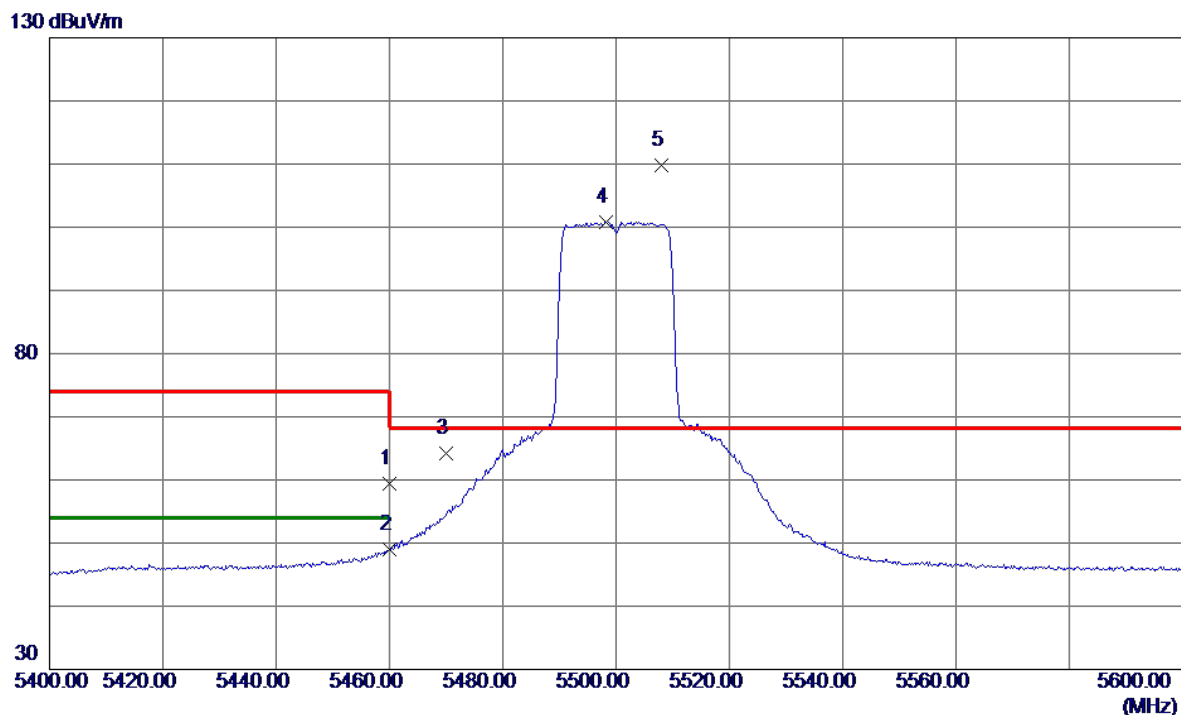


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	43.46	15.97	59.43	74.00	-14.57	Peak	
2	5460.0000	32.94	15.97	48.91	54.00	-5.09	AVG	
3	5470.0000	48.27	16.00	64.27	68.20	-3.93	Peak	
4	5498.2000	84.79	16.06	100.85	999.00	-898.15	AVG	No Limit
5 *	5508.0000	93.70	16.08	109.78	68.20	41.58	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

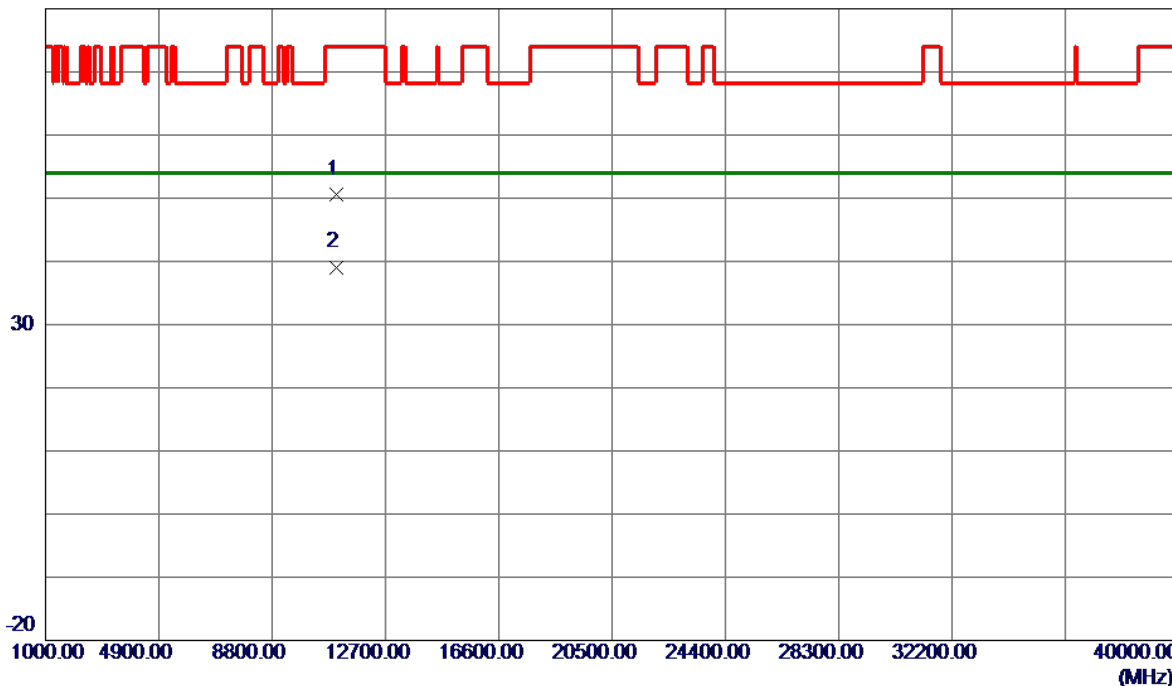


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.5500	37.81	12.78	50.59	74.00	-23.41	Peak	
2 *	11002.4100	26.32	12.78	39.10	54.00	-14.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

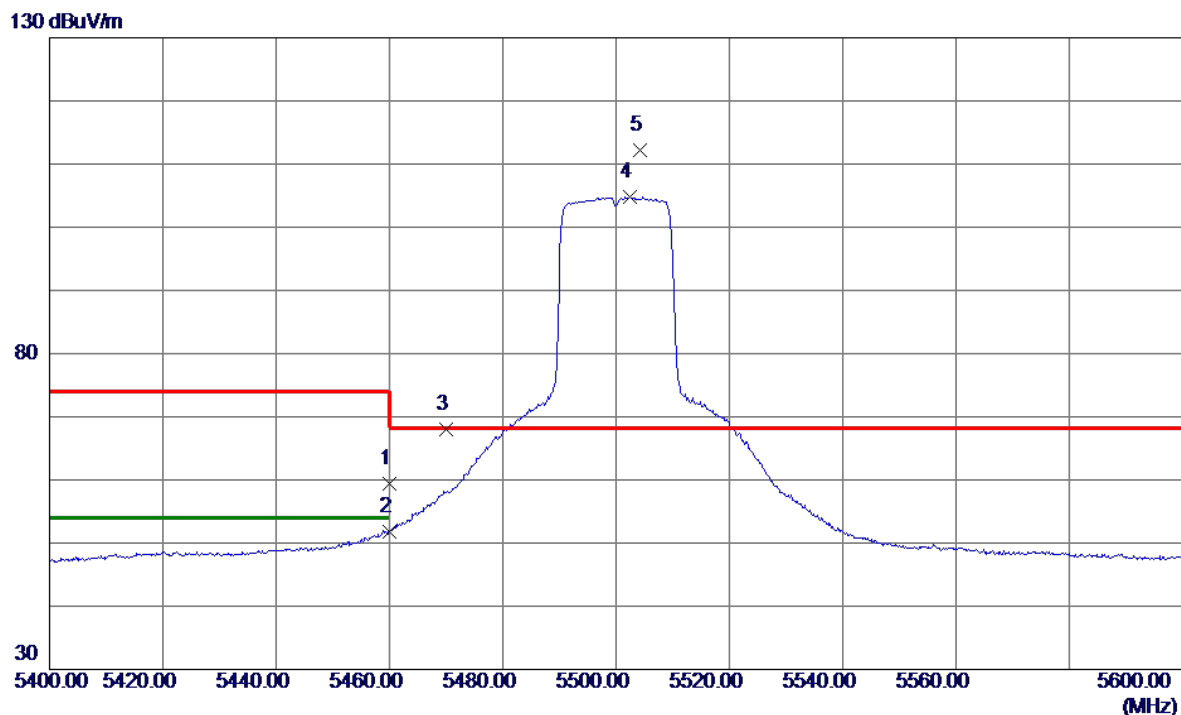


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	43.37	15.97	59.34	74.00	-14.66	Peak	
2	5460.0000	35.81	15.97	51.78	54.00	-2.22	AVG	
3	5470.0000	52.03	16.00	68.03	68.20	-0.17	Peak	
4	5502.4000	88.67	16.07	104.74	999.00	-894.26	AVG	No Limit
5 *	5504.3000	96.16	16.07	112.23	68.20	44.03	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

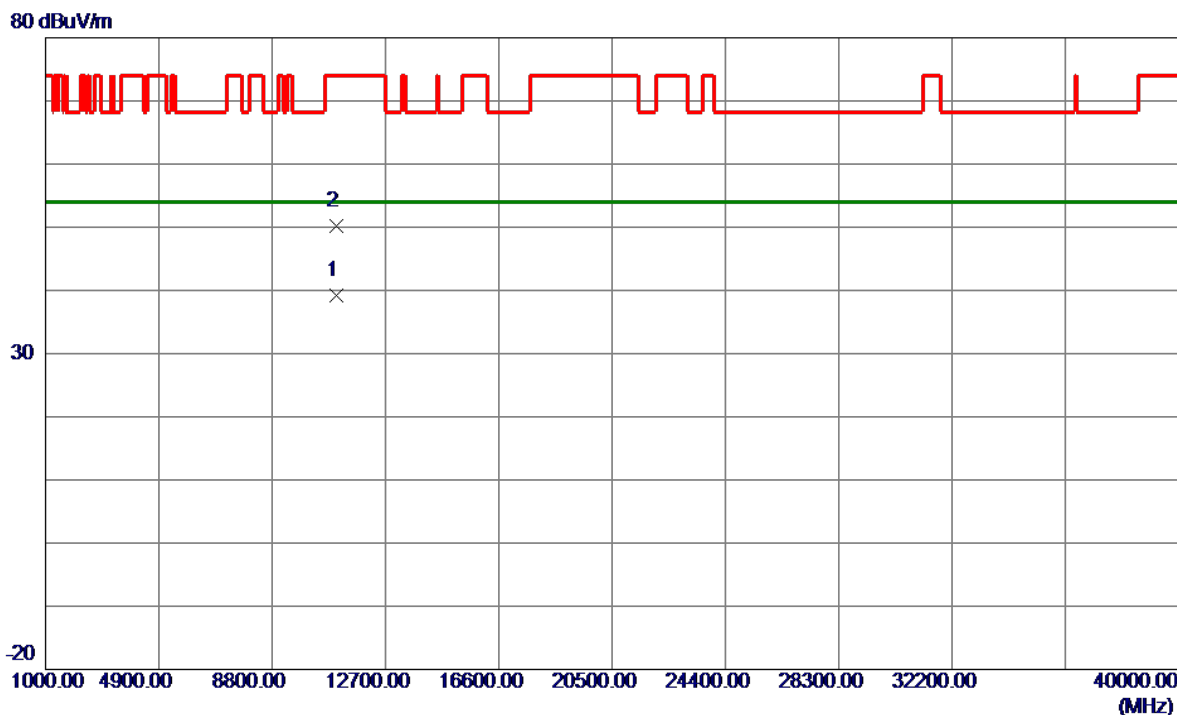


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.0950	26.46	12.78	39.24	54.00	-14.76	AVG	
2	11000.8500	37.48	12.78	50.26	74.00	-23.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

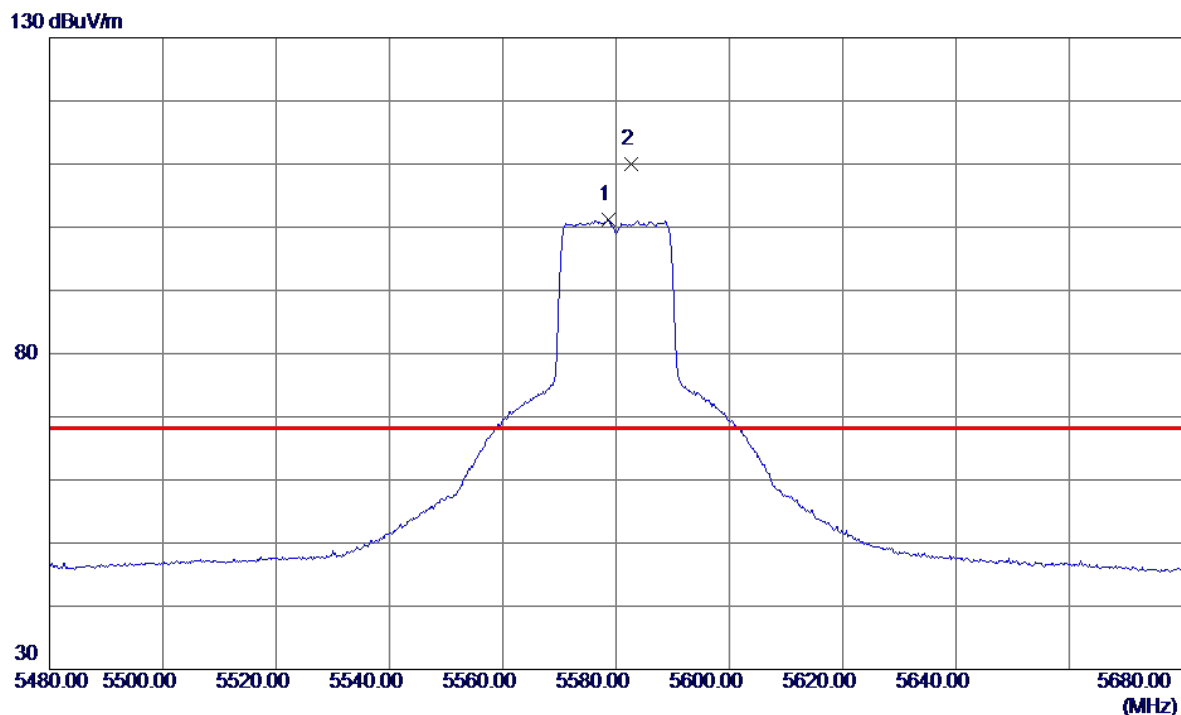


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5578.6000	84.98	16.22	101.20	999.00	-897.80	AVG	No Limit
2 *	5582.6000	93.77	16.23	110.00	68.20	41.80	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

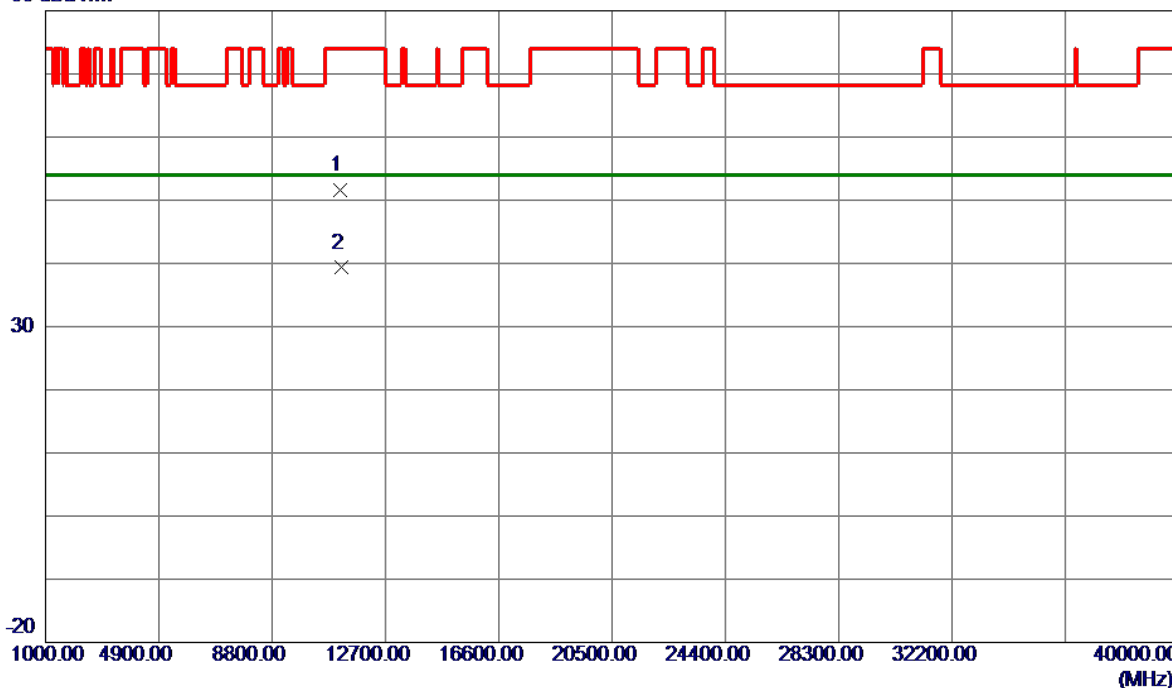


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11158.8620	38.63	12.90	51.53	74.00	-22.47	Peak	
2 *	11161.7020	26.40	12.90	39.30	54.00	-14.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

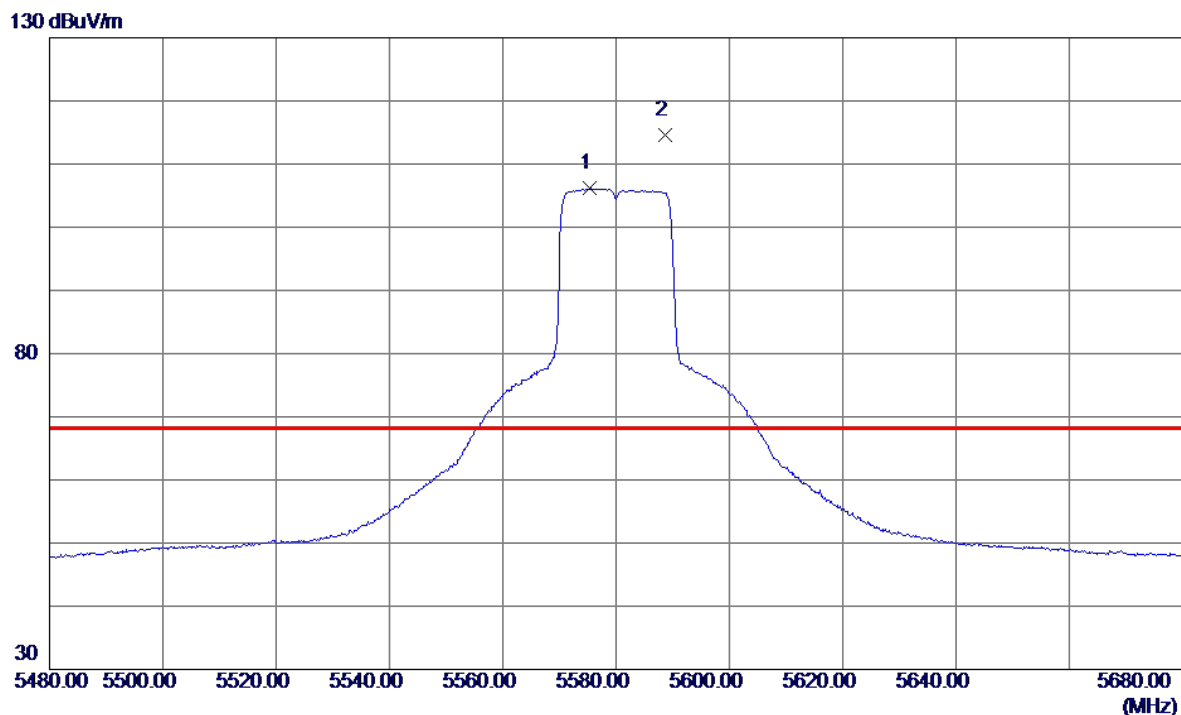


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5575.4000	89.92	16.22	106.14	999.00	-892.86	AVG	No Limit
2 *	5588.6000	98.33	16.24	114.57	68.20	46.37	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

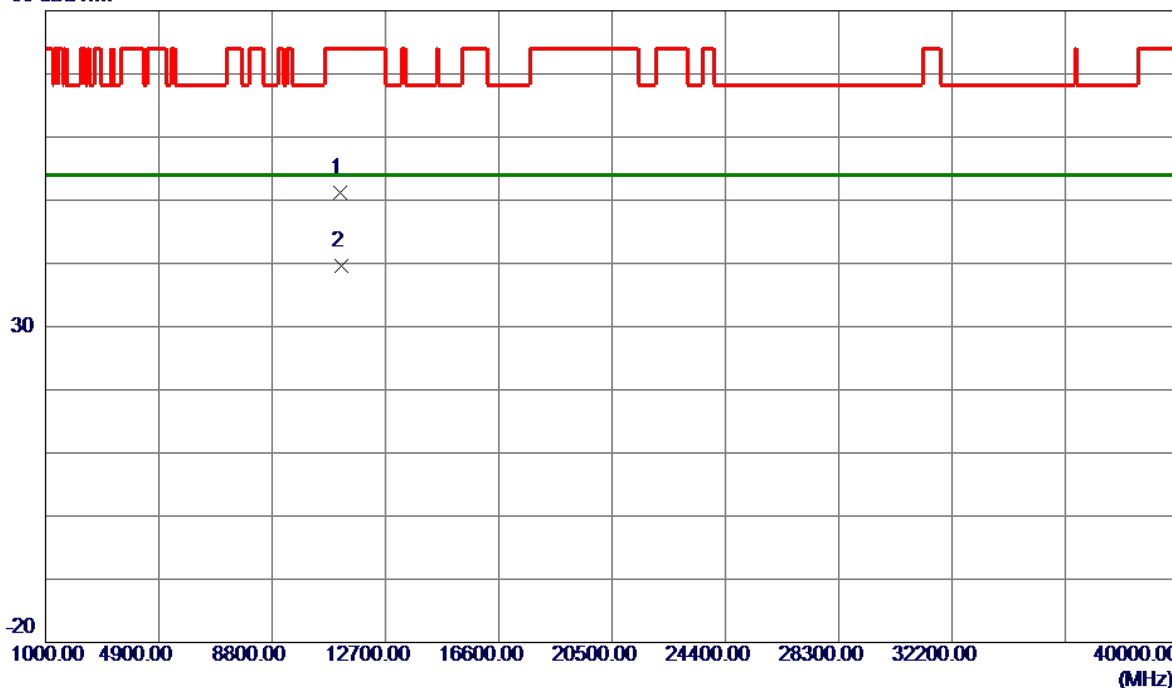


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.6920	38.30	12.90	51.20	74.00	-22.80	Peak	
2 *	11161.7500	26.69	12.90	39.59	54.00	-14.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

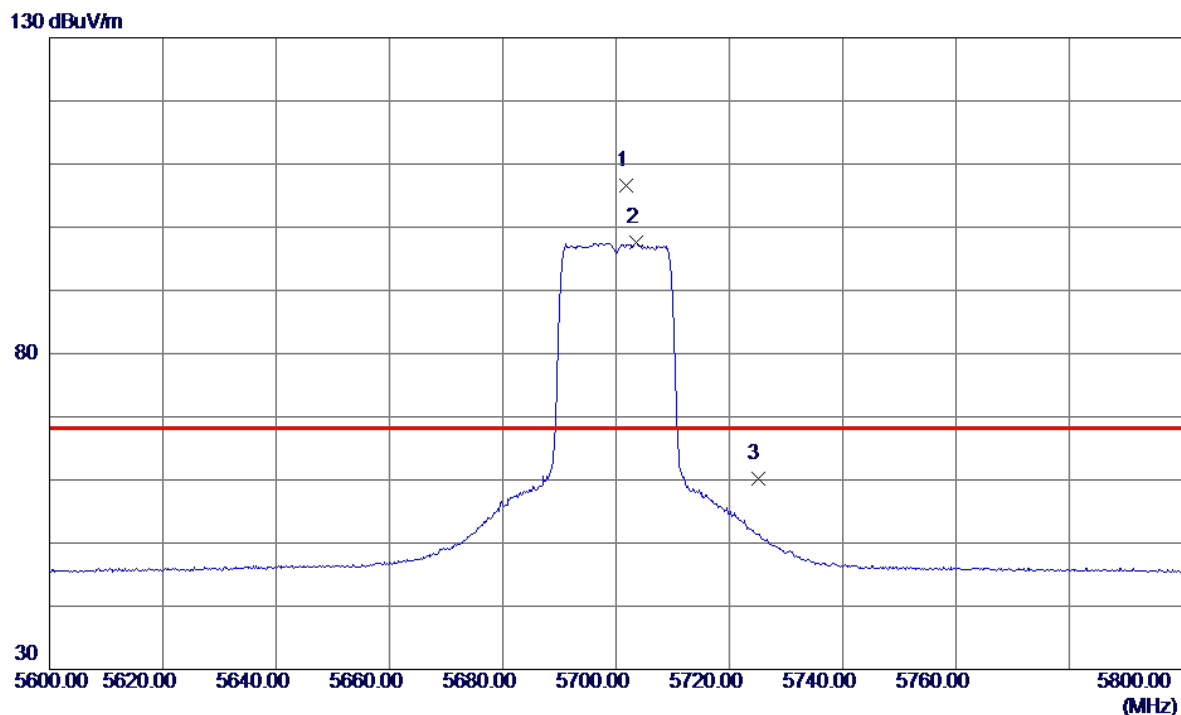


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.8000	90.15	16.47	106.62	68.20	38.42	Peak	No Limit
2	5703.6000	81.04	16.47	97.51	999.00	-901.49	AVG	No Limit
3	5725.0000	43.69	16.51	60.20	68.20	-8.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

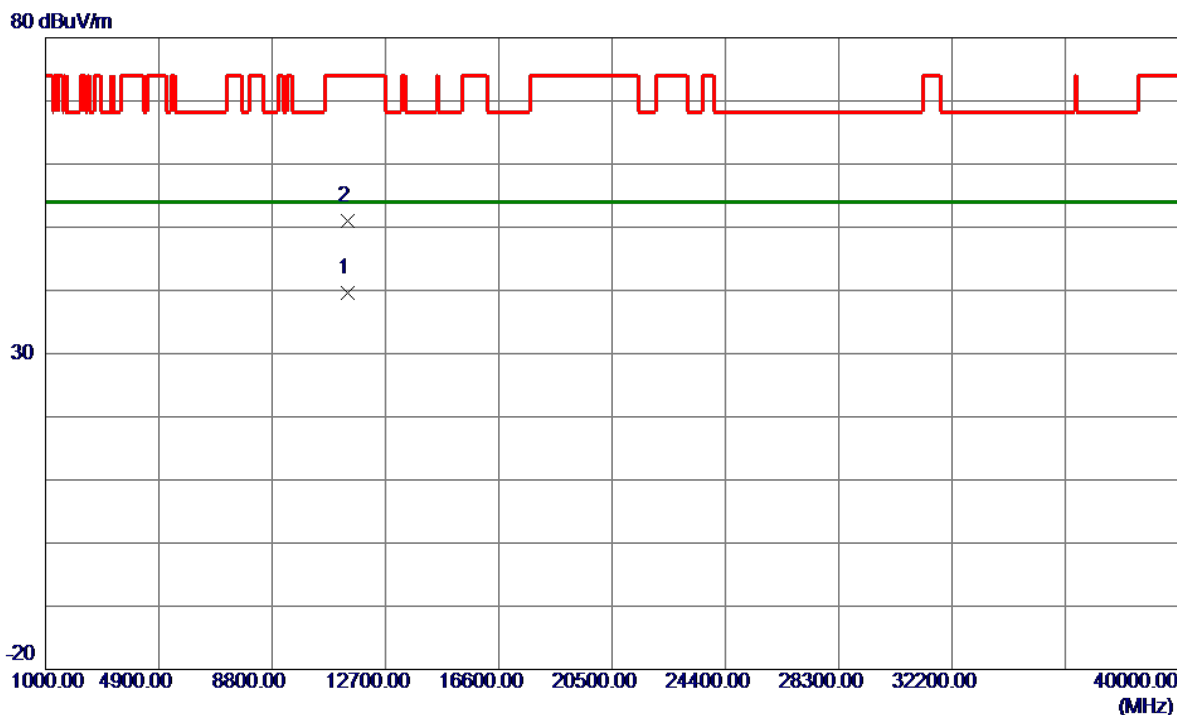


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.2150	26.47	13.08	39.55	54.00	-14.45	AVG	
2	11400.1300	37.95	13.08	51.03	74.00	-22.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

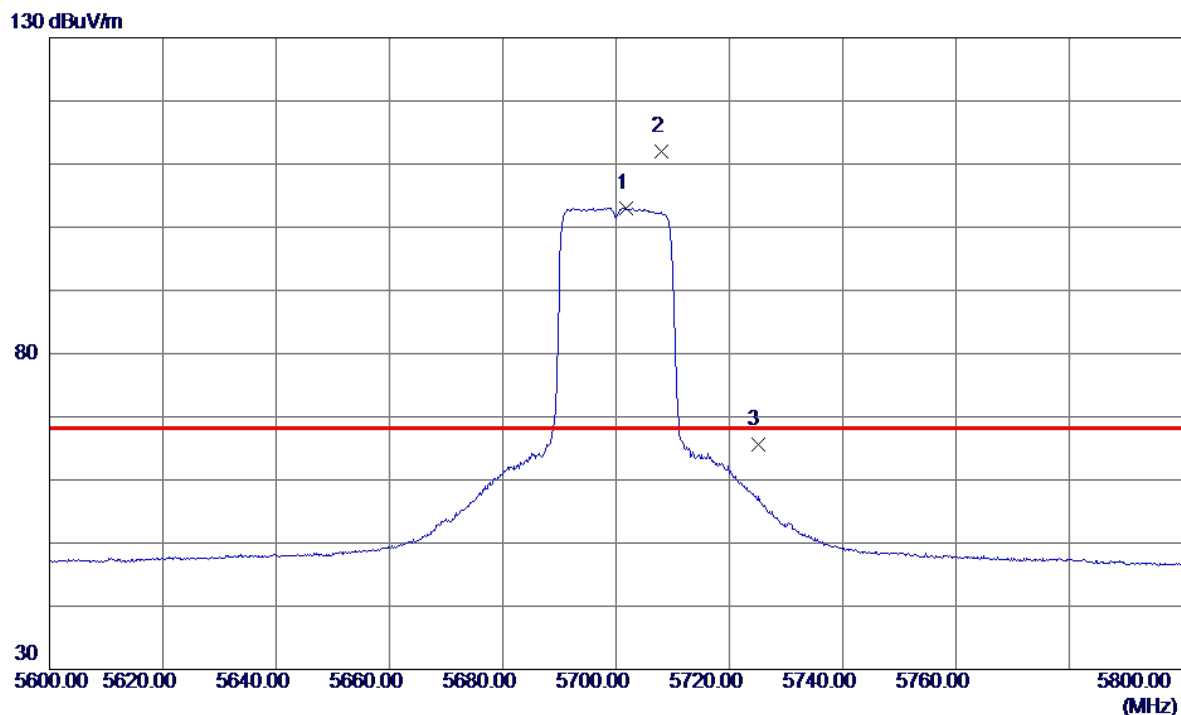


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5701.7000	86.59	16.47	103.06	999.00	-895.94	AVG	No Limit
2 *	5708.1000	95.52	16.48	112.00	68.20	43.80	Peak	No Limit
3	5725.0000	49.08	16.51	65.59	68.20	-2.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

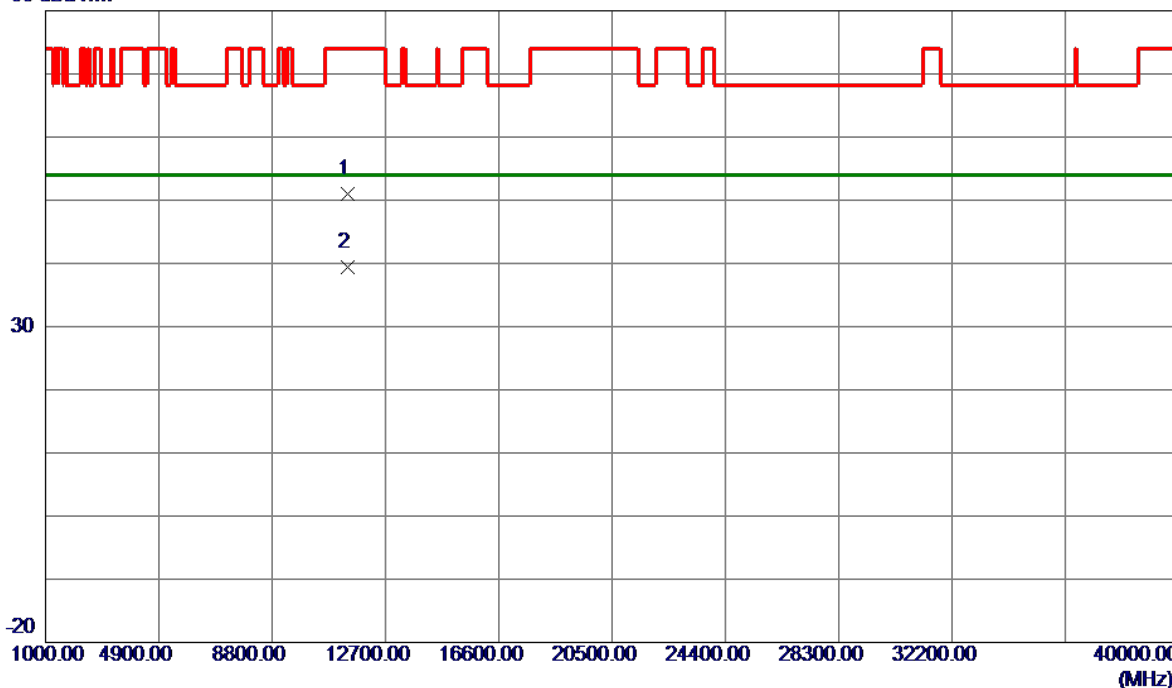


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11399.3580	37.95	13.08	51.03	74.00	-22.97	Peak	
2 *	11400.1600	26.30	13.08	39.38	54.00	-14.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

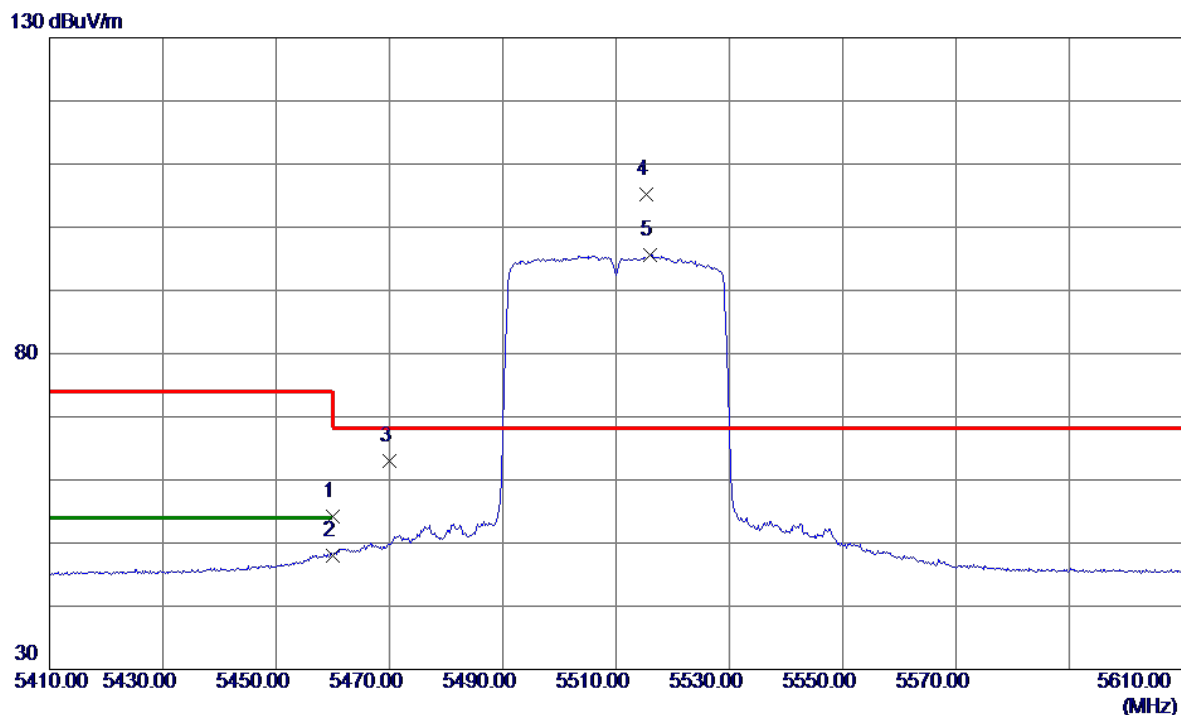


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.24	15.97	54.21	74.00	-19.79	Peak	
2	5460.0000	32.01	15.97	47.98	54.00	-6.02	AVG	
3	5470.0000	47.08	16.00	63.08	68.20	-5.12	Peak	
4 *	5515.4000	89.05	16.10	105.15	68.20	36.95	Peak	No Limit
5	5516.0000	79.53	16.10	95.63	999.00	-903.37	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

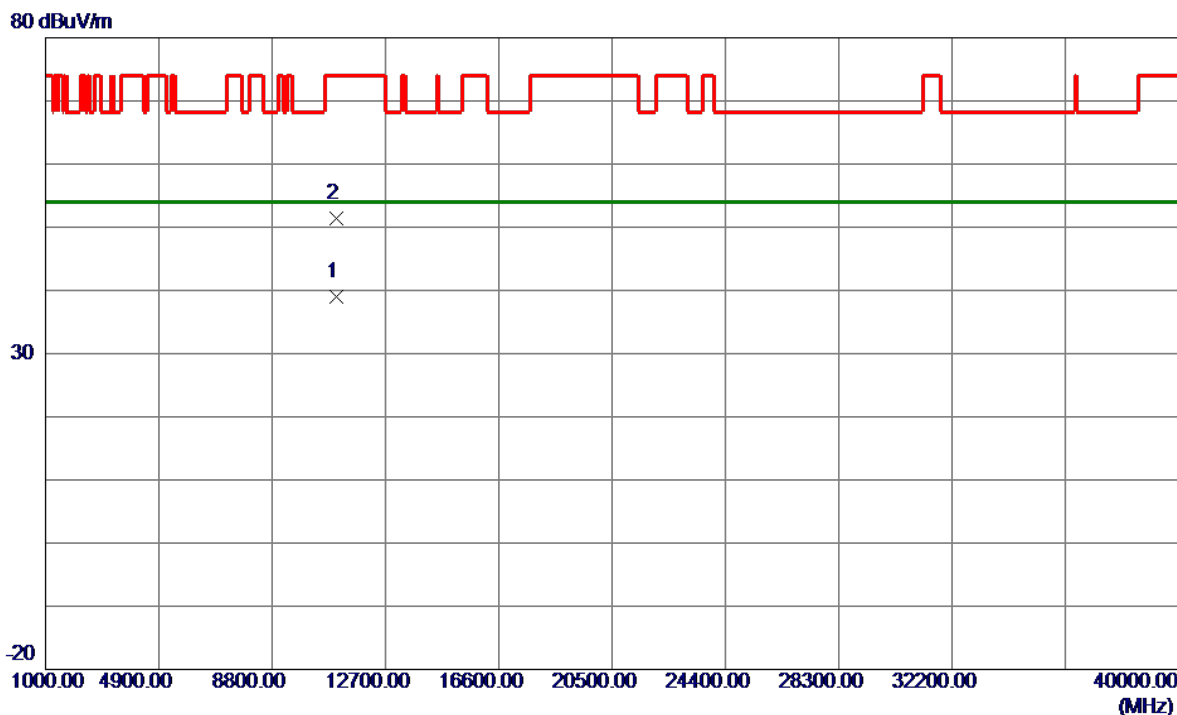


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11018.3800	26.30	12.79	39.09	54.00	-14.91	AVG	
2	11021.1320	38.54	12.80	51.34	74.00	-22.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

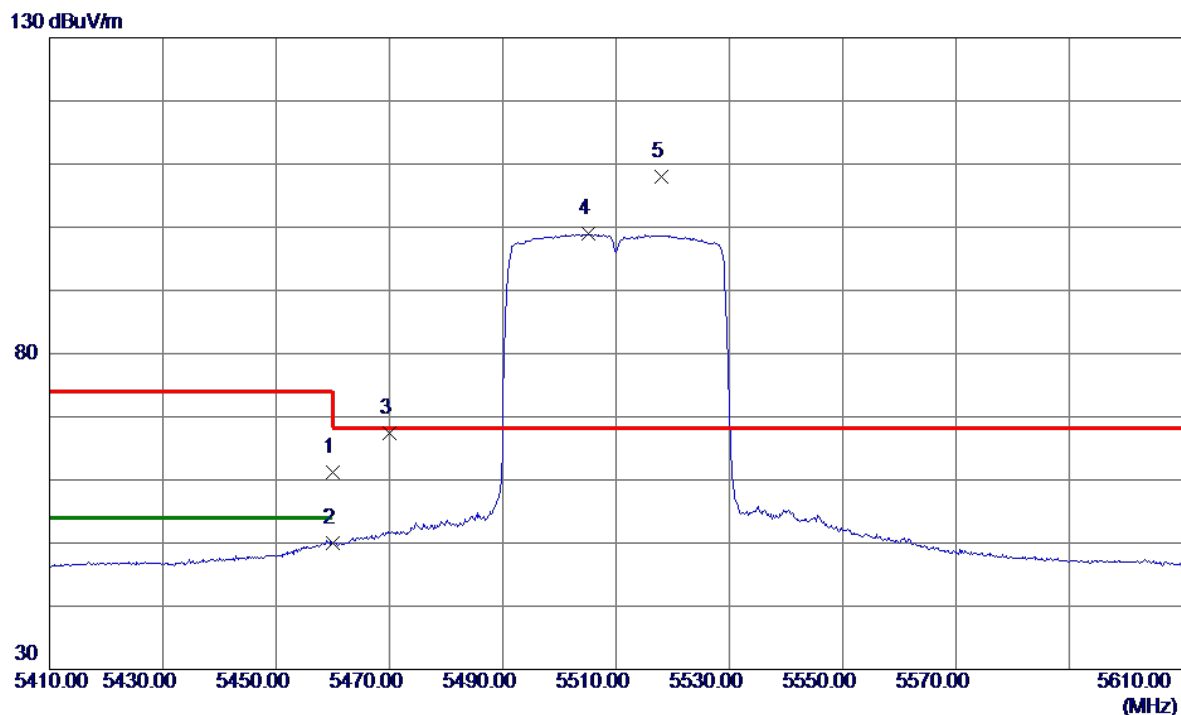


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.21	15.97	61.18	74.00	-12.82	Peak	
2	5460.0000	34.11	15.97	50.08	54.00	-3.92	AVG	
3	5470.0000	51.40	16.00	67.40	68.20	-0.80	Peak	
4	5505.1000	82.87	16.08	98.95	999.00	-900.05	AVG	No Limit
5 *	5517.9000	91.96	16.10	108.06	68.20	39.86	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

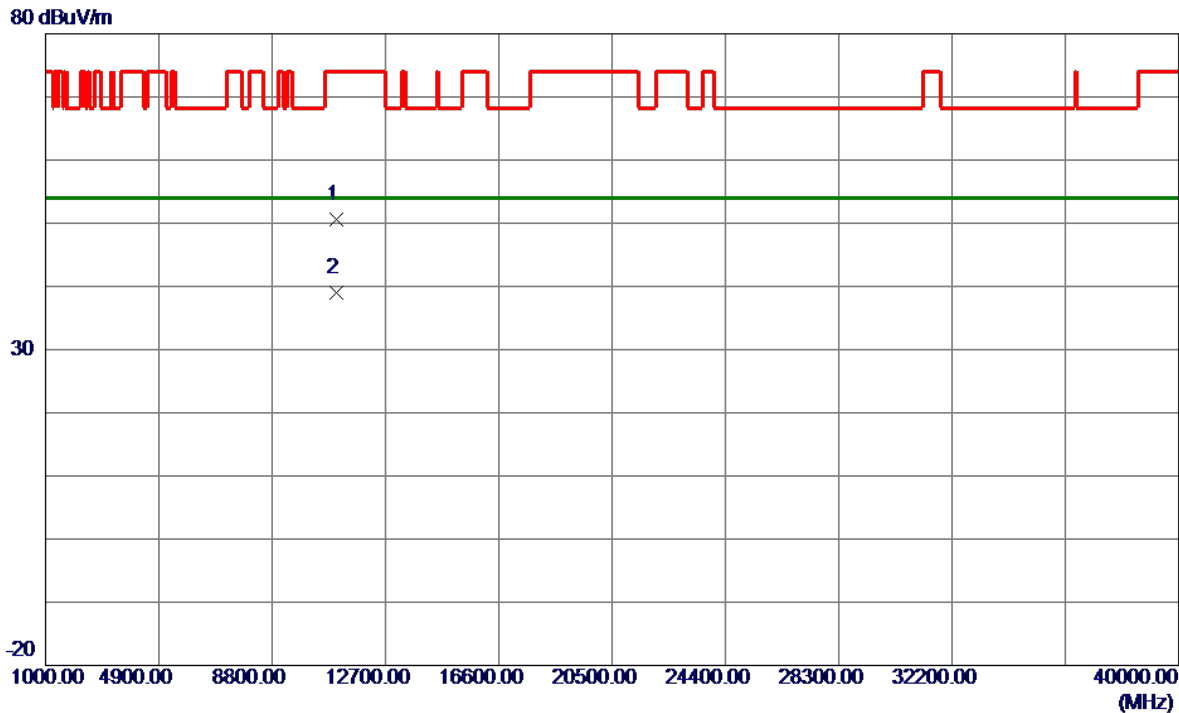


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.7400	37.86	12.79	50.65	74.00	-23.35	Peak	
2 *	11021.4580	26.29	12.80	39.09	54.00	-14.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

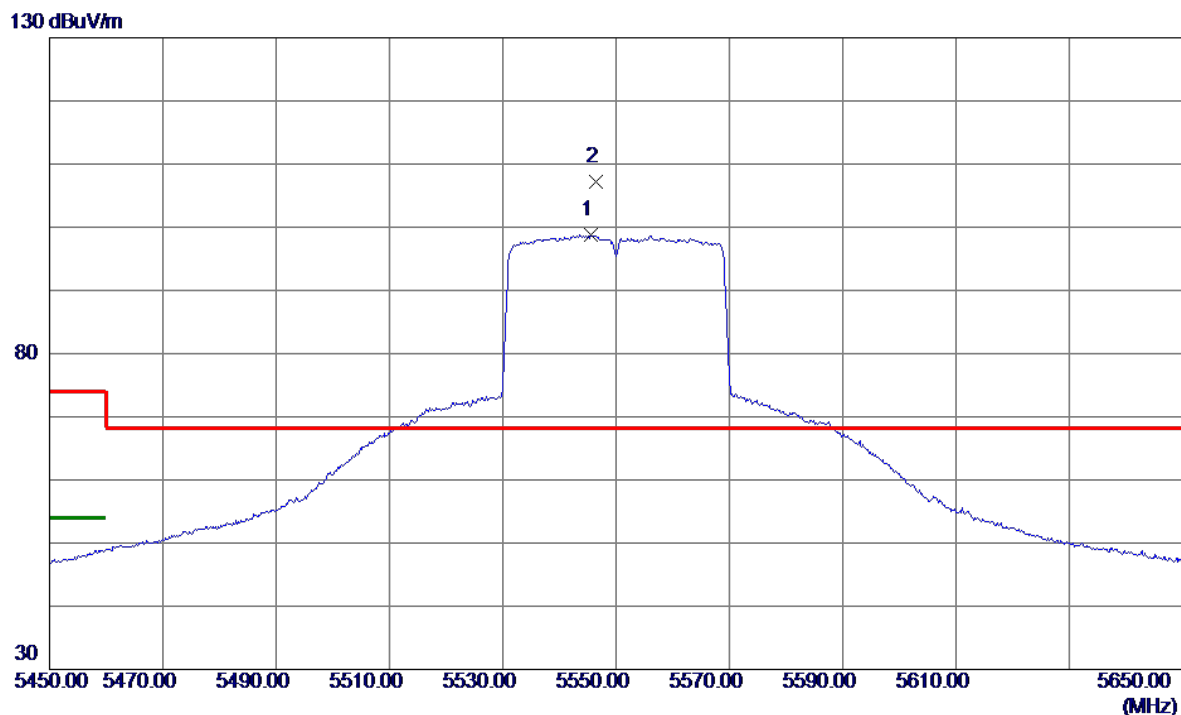


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5545.6000	82.59	16.16	98.75	999.00	-900.25	AVG	No Limit
2 *	5546.4000	90.97	16.16	107.13	68.20	38.93	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

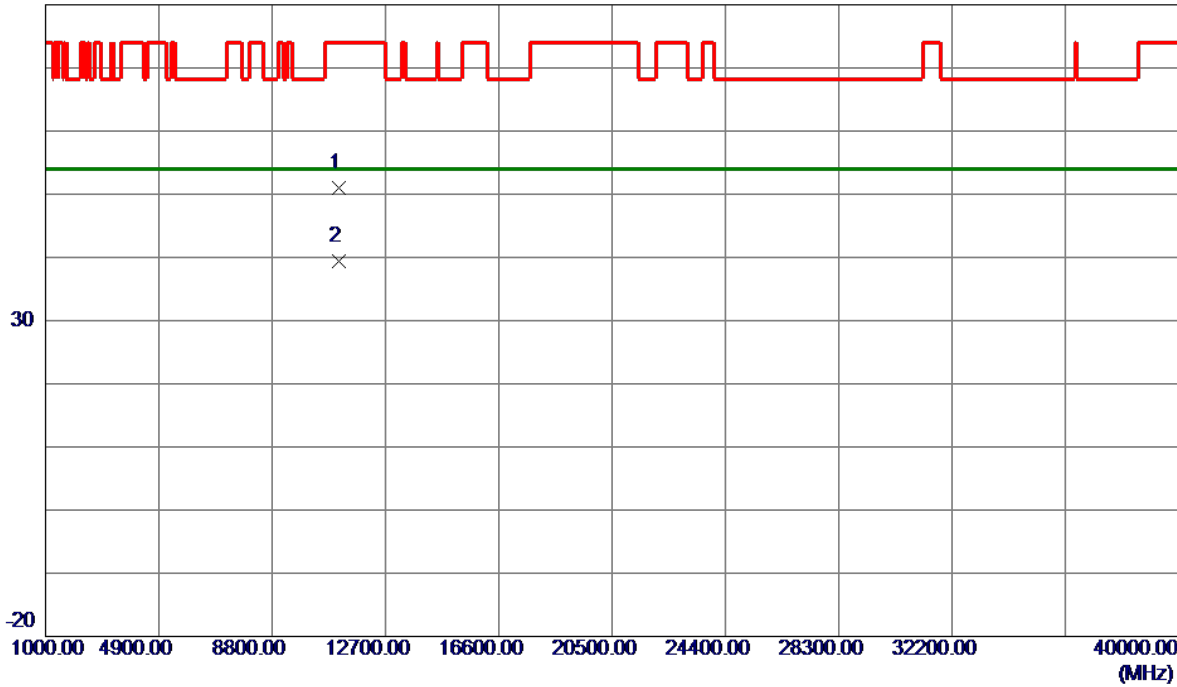


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11101.3780	38.23	12.86	51.09	74.00	-22.91	Peak	
2 *	11102.0130	26.52	12.86	39.38	54.00	-14.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

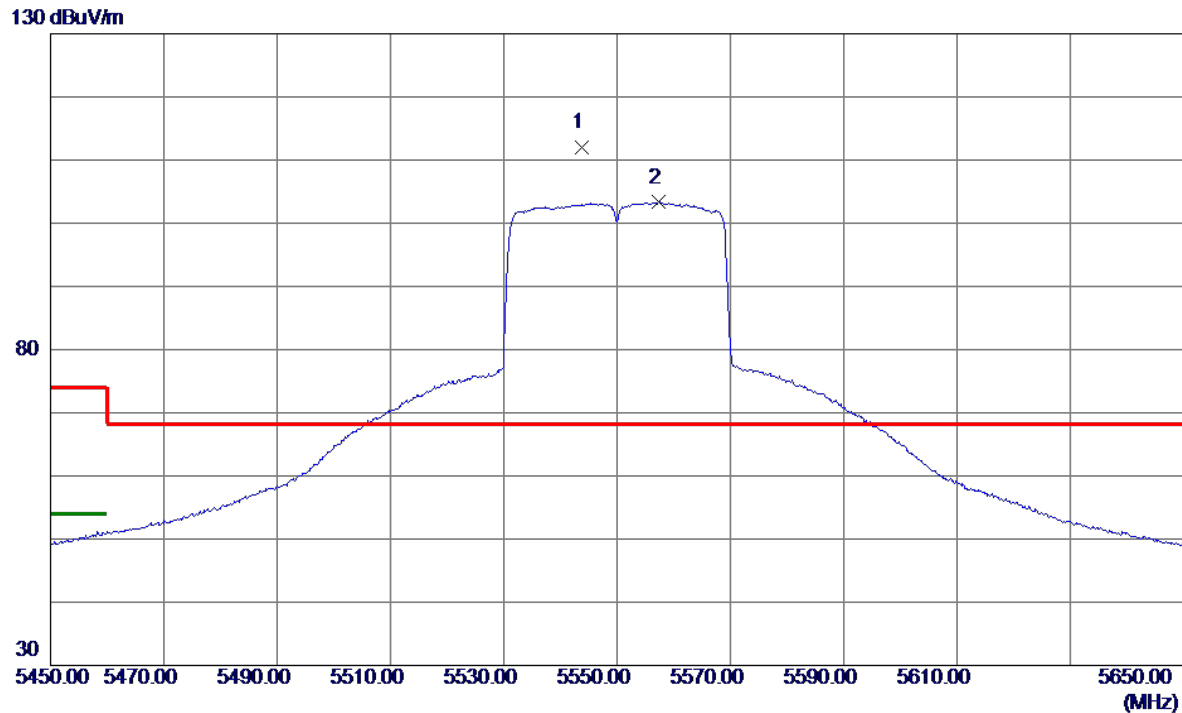


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5543.7000	95.88	16.15	112.03	68.20	43.83	Peak	No Limit
2	5557.4000	87.12	16.18	103.30	999.00	-895.70	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

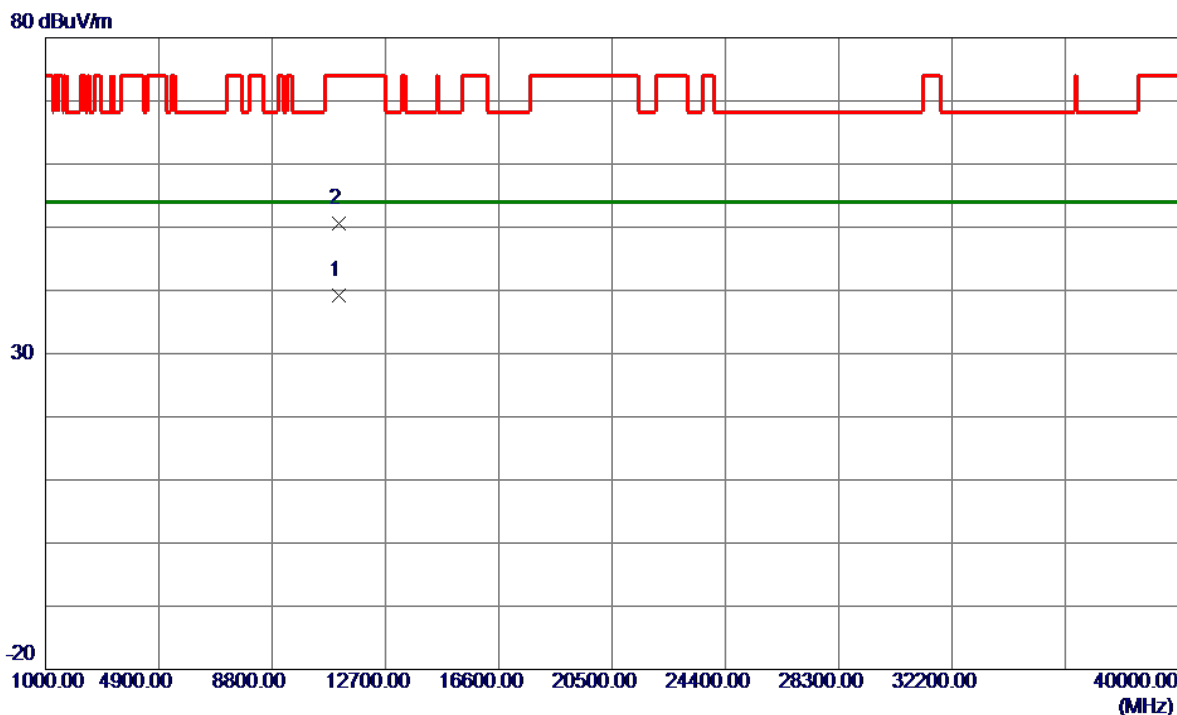

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11097.6280	26.37	12.85	39.22	54.00	-14.78	AVG	
2	11102.1050	37.72	12.86	50.58	74.00	-23.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.