



FCC SDoc TEST REPORT
LONGYOU XUJUN ELECTRONICS CO.LTD
ANTENNA

Test Model: FSA-5809

Prepared for : LONGYOU XUJUN ELECTRONICS CO.LTD
Address : 4#BUILDING, NO.21 LONGSHAN ROAD, CHENGBEI
INDUSTRIAL PARK, LONGYOU, ZHEJIANG

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 24, 2022
Number of tested samples : 1
Sample No. : 220324055A
Date of Test : March 24, 2022 ~ March 26, 2022
Date of Report : April 07, 2022



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**FCC SDoC TEST REPORT****FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014****Report Reference No.** : LCS220324055AE**Date Of Issue** : April 07, 2022**Testing Laboratory Name** : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, ChinaTesting Location/ Procedure... : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name** : **LONGYOU XUJUN ELECTRONICS CO.LTD**Address : 4#BUILDING, NO.21 LONGSHAN ROAD, CHENGBEI
INDUSTRIAL PARK, LONGYOU, ZHEJIANG**Test Specification**Standard : FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI
C63.4 -2014

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **ANTENNA**

Trade Mark : Five Star

Test Model : FSA-5809

Ratings : Please Refer To Page 7

Result : **Positive****Compiled by:**

Ray Yang/ Administrators

Supervised by:

Jin Wang/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC -- TEST REPORT

Test Report No. : LCS220324055AE

April 07, 2022

Date of issue

Test Model : FSA-5809

EUT..... : ANTENNA

Applicant..... : LONGYOU XUJUN ELECTRONICS CO.LTD

Address..... : 4#BUILDING, NO.21 LONGSHAN ROAD, CHENGBEI
INDUSTRIAL PARK, LONGYOU, ZHEJIANG

Telephone..... : /

Fax..... : /

Manufacturer..... : LONGYOU XUJUN ELECTRONICS CO.LTD

Address..... : 4#BUILDING, NO.21 LONGSHAN ROAD, CHENGBEI
INDUSTRIAL PARK, LONGYOU, ZHEJIANG

Telephone..... : /

Fax..... : /

Factory..... : LONGYOU XUJUN ELECTRONICS CO.LTD

Address..... : 4#BUILDING, NO.21 LONGSHAN ROAD, CHENGBEI
INDUSTRIAL PARK, LONGYOU, ZHEJIANG

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of
the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxuezhiwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Revision	Issue Date	Revisions Content	Revised By
000	April 07, 2022	Initial Issue	--



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT).....	7
2.2. Support equipment List	7
2.3. Description of Test Facility	7
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty.....	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT	18
5. EXTERIOR PHOTOGRAPHS OF THE EUT	18
6. INTERIOR PHOTOGRAPHS OF THE EUT.....	18





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B(SDoC), ANSI C63.4 -2014	Class B	PASS

N/A is an abbreviation for Not Applicable.

Test mode:

Mode	Working	Record
------	---------	--------



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : ANTENNA

Trade Mark : Five Star

Test Model : FSA-5809

Power Supply : For adapter:
Input: 120V AC, 60Hz, Max, 10W
Output: 15V AC, 300mA

Highest internal freq. : $F_x \leq 108\text{MHz}$

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 1.705\text{ MHz}$	30 MHz
$1.705\text{ MHz} < F_x \leq 108\text{ MHz}$	1 GHz
$108\text{ MHz} < F_x \leq 500\text{ MHz}$	2 GHz
$500\text{ MHz} < F_x \leq 1000\text{ MHz}$	5 GHz
$F_x > 1\text{ GHz}$	$5 \times F_x$ up to a maximum of 40 GHz

2.2. Support equipment List

Name	Manufacturers	M/N	S/N
TV	PHILIPS	PM5418	L06252353

2.3. Description of Test Facility

Site Description

EMC Lab. : NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,

518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U _{lab})	Expanded Uncertainty (U _{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102311	2022-03-15	2023-03-14
3	Artificial Mains	R&S	ENV216	101288	2021-06-21	2022-06-20
4	10dB Attenuator	SCHWARZB ECK	MTS-IMP-136	261115-001-0032	2021-06-21	2022-06-20
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2021-12-01	2022-11-30

3.1.2. Block Diagram of Test Setup

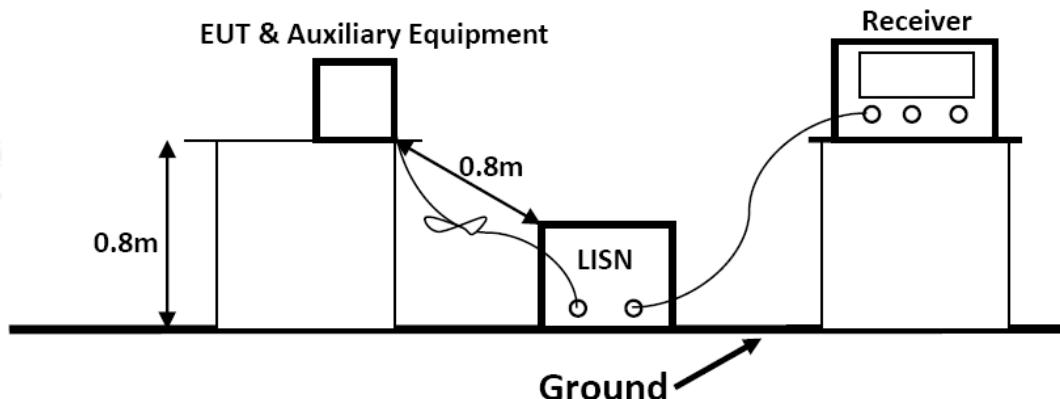

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring test Mode (Working) and measure it.

3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7. Test Results

PASS.

The test result please refer to the next page.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	FSA-5809	Test Mode	Working
Environmental Conditions	22.5 °C, 53.7% RH	Test Engineer	Zero Qi
Pol	Line	Test Voltage	AC 120V/60Hz

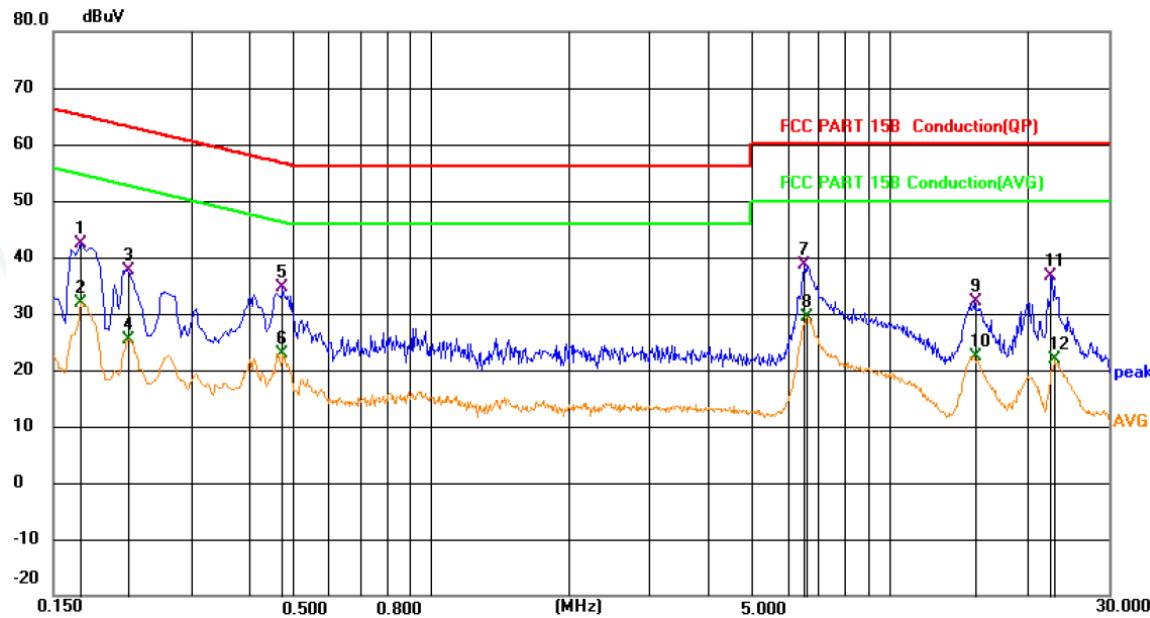


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	0.1726	22.73	19.63	42.36	64.83	-22.47	QP		
2	0.1726	12.19	19.63	31.82	54.83	-23.01	AVG		
3	0.2176	18.06	19.63	37.69	62.91	-25.22	QP		
4	0.2176	5.78	19.63	25.41	52.91	-27.50	AVG		
5	0.4741	15.07	19.64	34.71	56.44	-21.73	QP		
6	0.4741	3.18	19.64	22.82	46.44	-23.62	AVG		
7	6.5041	18.85	19.72	38.57	60.00	-21.43	QP		
8	6.6166	9.66	19.72	29.38	50.00	-20.62	AVG		
9	15.3151	12.19	19.88	32.07	60.00	-27.93	QP		
10	15.3151	2.45	19.88	22.33	50.00	-27.67	AVG		
11	22.4295	16.45	20.08	36.53	60.00	-23.47	QP		
12	22.8751	1.81	20.07	21.88	50.00	-28.12	AVG		





Test Model	FSA-5809	Test Mode	Working
Environmental Conditions	22.5 °C, 53.7% RH	Test Engineer	Zero Qi
Pol	Neutral	Test Voltage	AC 120V/60Hz

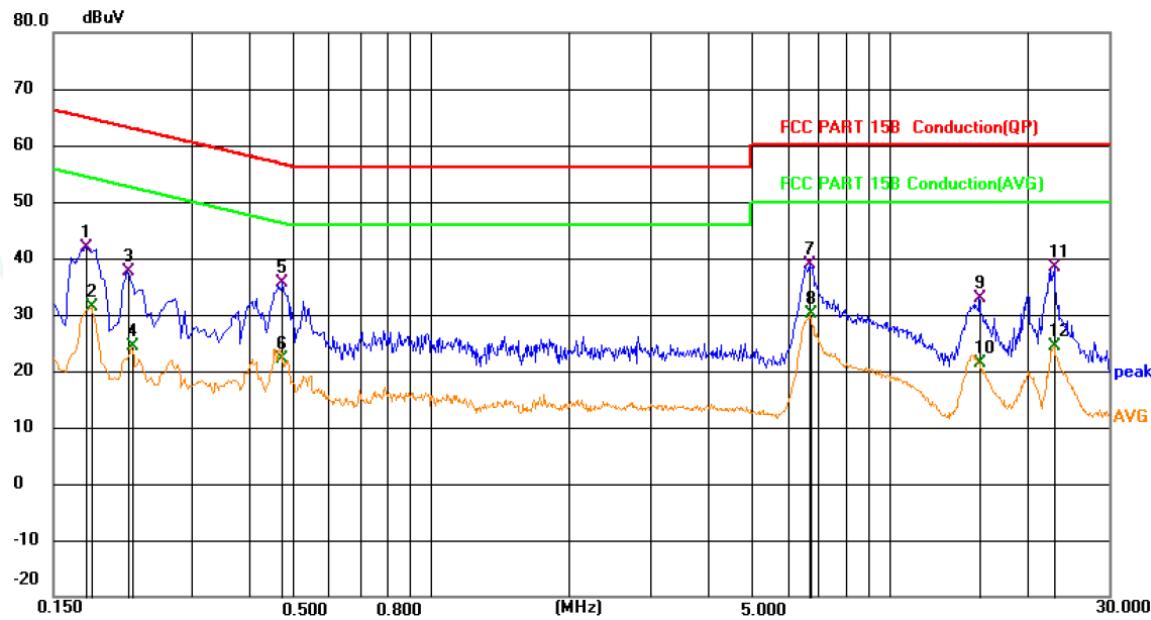

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	0.1771	22.25	19.63	41.88	64.62	-22.74	QP		
2	0.1816	11.64	19.63	31.27	54.41	-23.14	AVG		
3	0.2176	17.99	19.63	37.62	62.91	-25.29	QP		
4	0.2221	4.65	19.63	24.28	52.74	-28.46	AVG		
5	0.4741	16.05	19.64	35.69	56.44	-20.75	QP		
6	0.4741	2.48	19.64	22.12	46.44	-24.32	AVG		
7	6.6661	19.12	19.82	38.94	60.00	-21.06	QP		
8	6.7246	10.41	19.82	30.23	50.00	-19.77	AVG		
9	15.6571	12.87	19.90	32.77	60.00	-27.23	QP		
10	15.6571	1.44	19.90	21.34	50.00	-28.66	AVG		
11	22.8301	18.23	20.08	38.31	60.00	-21.69	QP		
12	22.8301	4.37	20.08	24.45	50.00	-25.55	AVG		

Note: Pre-Scan all mode, Thus record worse case mode result in this report.
Result = Reading + Correct, Margin = Result - Limit.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity


3.2. Radiated emission Measurement

3.2.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	N/A	N/A
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-21	2022-06-20
3	Positioning Controller	MF	MF7082	MF78020803	2021-06-21	2022-06-20
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-07-25	2024-07-24
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-07-01	2024-06-30
6	EMI Test Receiver	R&S	ESR3	102312	2021-06-21	2022-06-20
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2021-11-16	2022-11-15
8	Broadband Preamplifier	/	BP-01M18G	P190501	2021-06-21	2022-06-20

3.2.2. Block Diagram of Test Setup

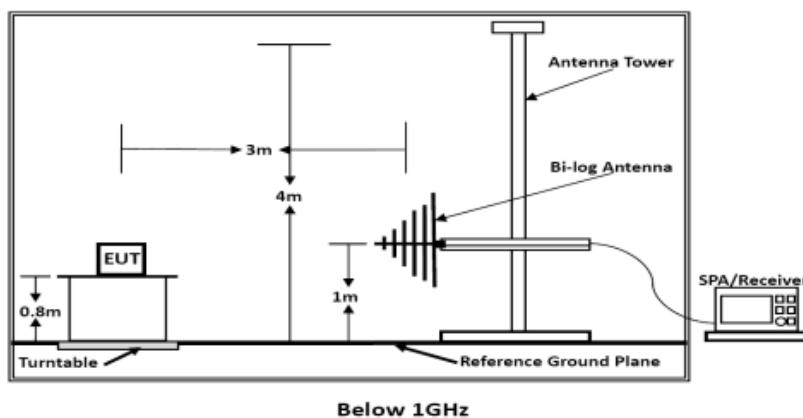

Below 1GHz

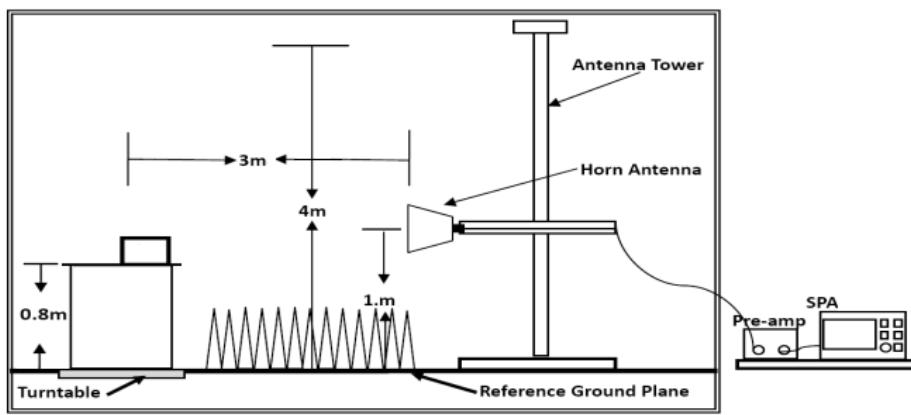

Above 1GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxuezhiwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark: (1) Emission level (dB) μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
Above 1000	3	74	54

***Note: The lower limit applies at the transition frequency.

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode (Working) and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.2.7. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

The frequency range from 30MHz to 1000MHz and above 1000MHz is checked.

3.2.8. Radiated Emission Noise Measurement Result

PASS.

The scanning waveforms please refer to the next page.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,


518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	FSA-5809	Test Mode	Working
Environmental Conditions	22.2°C, 52.5% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Li Bruce	Test Voltage	AC 120V/60Hz

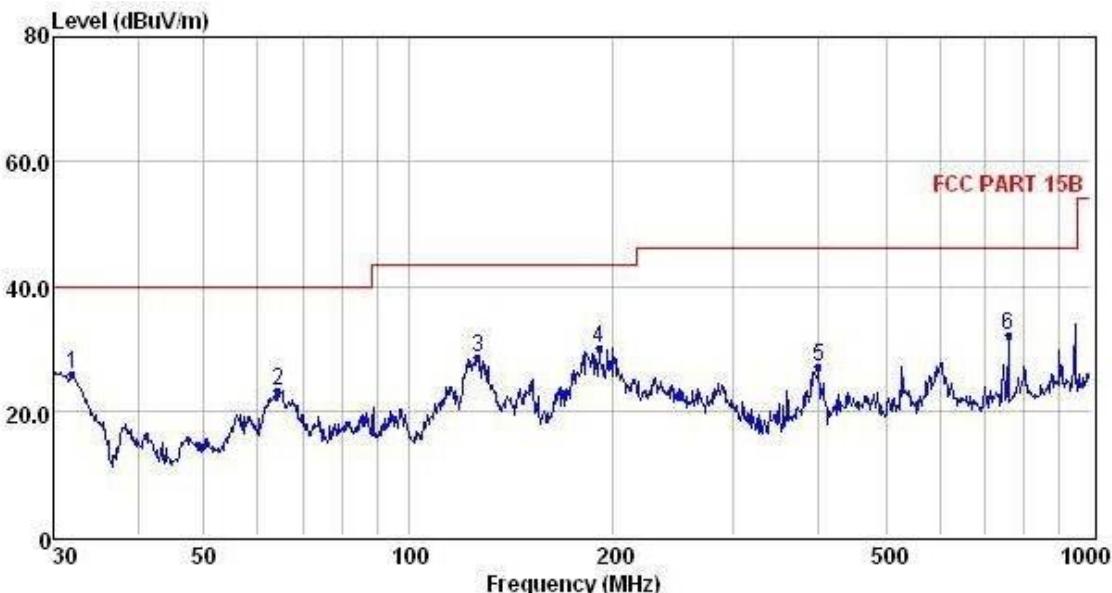

Freq	Reading	CabLos	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1	31.95	14.86	0.42	10.72	26.00	40.00	-14.00	QP
2	64.21	11.09	0.67	11.49	23.25	40.00	-16.75	QP
3	126.33	17.85	0.93	9.83	28.61	43.50	-14.89	QP
4	190.41	18.59	1.17	10.32	30.08	43.50	-13.42	QP
5	400.43	10.88	1.40	14.72	27.00	46.00	-19.00	QP
6	758.04	10.41	1.92	19.72	32.05	46.00	-13.95	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxuezhiwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	FSA-5809	Test Mode	Working
Environmental Conditions	22.2°C, 52.5% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Li Bruce	Test Voltage	AC 120V/60Hz

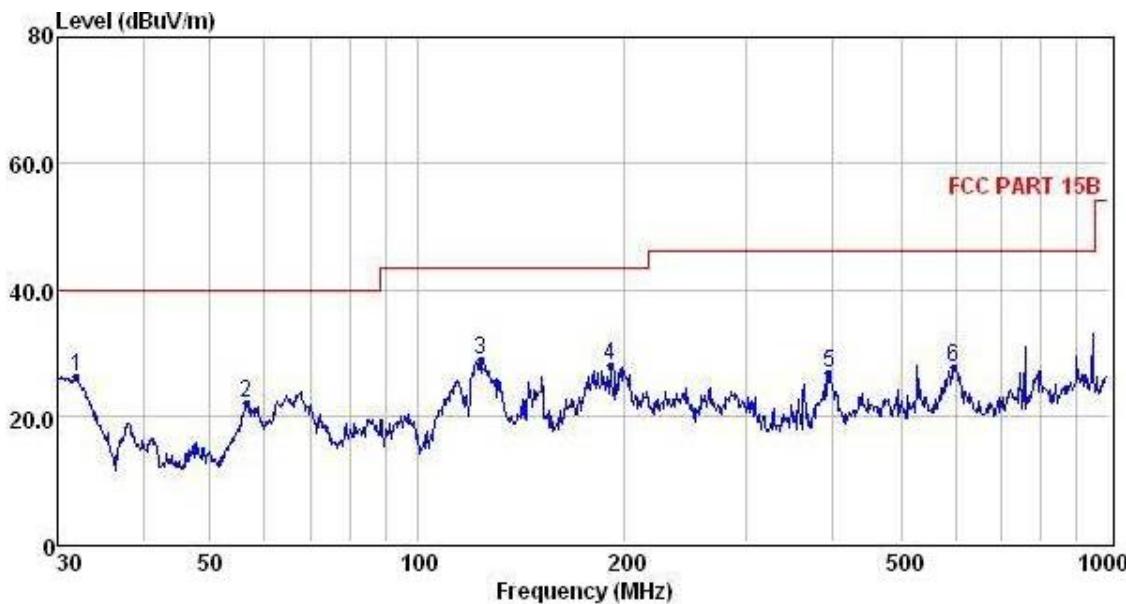

Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark	
							MHz	dBuV
1	31.95	14.97	0.42	10.72	26.11	40.00	-13.89	QP
2	56.39	8.74	0.63	12.53	21.90	40.00	-18.10	QP
3	123.70	17.69	0.92	10.14	28.75	43.50	-14.75	QP
4	190.41	16.51	1.17	10.32	28.00	43.50	-15.50	QP
5	396.24	10.74	1.40	14.67	26.81	46.00	-19.19	QP
6	597.22	6.98	1.50	19.21	27.69	46.00	-18.31	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

Remark: For above 1000MHz, Because the emission it too low to be reported.

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Level = Reading + Factor, Margin = Level-Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. TEST SETUP PhotographS of eut

Please refer to separated files for Test Setup Photos of the EUT.

5. Exterior Photographs of the eut

Please refer to separated files for External Photos of the EUT.

6. INTERIOR Photographs of the eut

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity