

APPENDIX C: PROBE CALIBRATION REPORT(S)

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1505

Place of Calibration:

Zurich

Date of Calibration:

September 7, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

N. Vetter

Approved by:

Alain Kaya

Probe ET3DV6

SN:1505

Manufactured:	October 24, 1999
Last calibration:	May 22, 2002
Repaired:	August 29, 2002
Recalibrated:	September 7, 2002

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1505

Sensitivity in Free Space

NormX	1.67 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.69 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.68 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	94	mV
DCP Y	94	mV
DCP Z	94	mV

Sensitivity in Tissue Simulating Liquid





Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
ConvF X	7.0 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	7.0 $\pm 9.5\%$ (k=2)	Alpha	0.21
ConvF Z	7.0 $\pm 9.5\%$ (k=2)	Depth	3.66
Head	1880 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
ConvF X	5.6 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	5.6 $\pm 9.5\%$ (k=2)	Alpha	0.43
ConvF Z	5.6 $\pm 9.5\%$ (k=2)	Depth	2.63



Boundary Effect

Head	835 MHz	Typical SAR gradient: 5 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		9.2	5.6
SAR _{be} [%] With Correction Algorithm		0.6	0.6
Head	1880 MHz	Typical SAR gradient: 10 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		11.4	8.1
SAR _{be} [%] With Correction Algorithm		0.3	0.3


Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.4 $\pm$ 0.2	mm

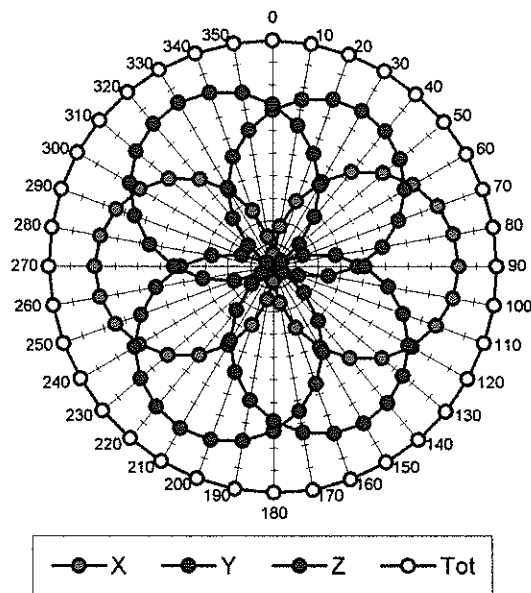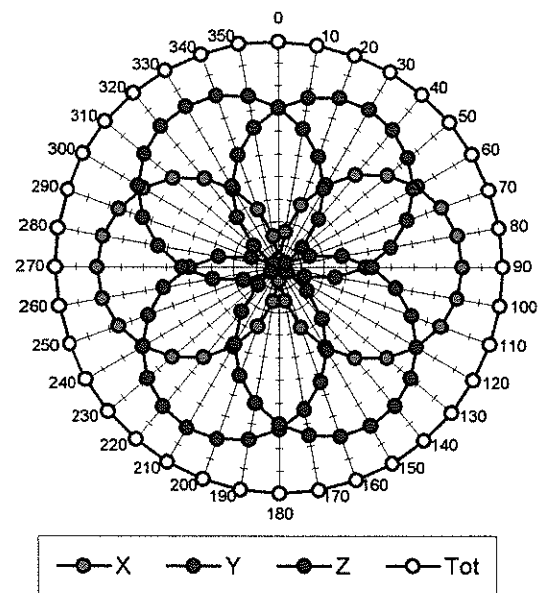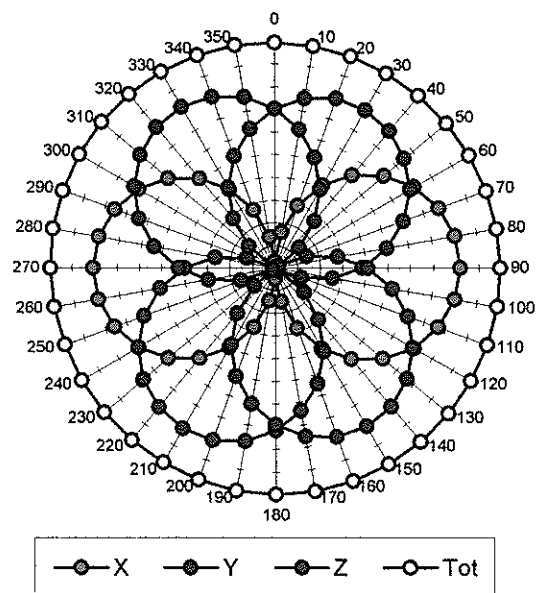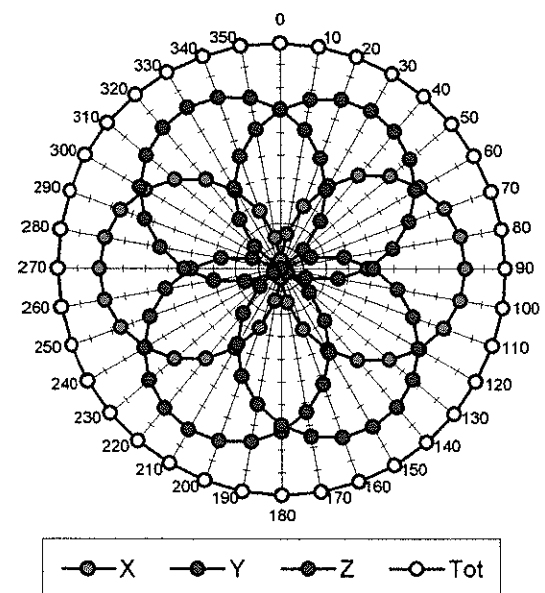Receiving Pattern (ϕ), $\theta = 0^\circ$ **f = 30 MHz, TEM cell ifi110****f = 100 MHz, TEM cell ifi110****f = 300 MHz, TEM cell ifi110****f = 900 MHz, TEM cell ifi110**

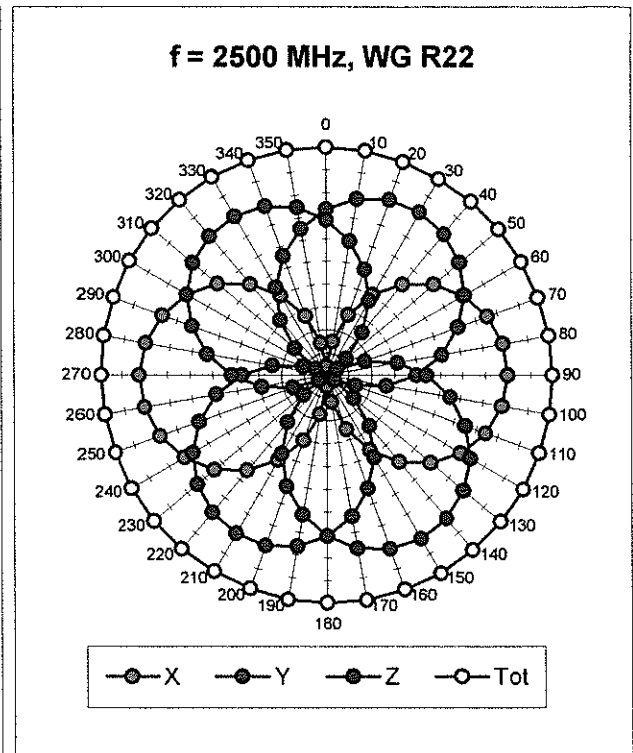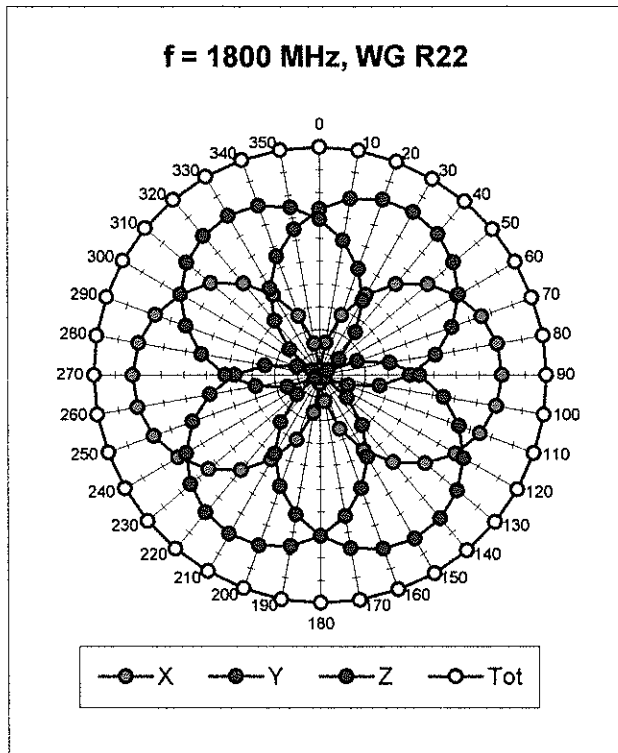


Isotropy Error (ϕ), $\theta = 0^\circ$


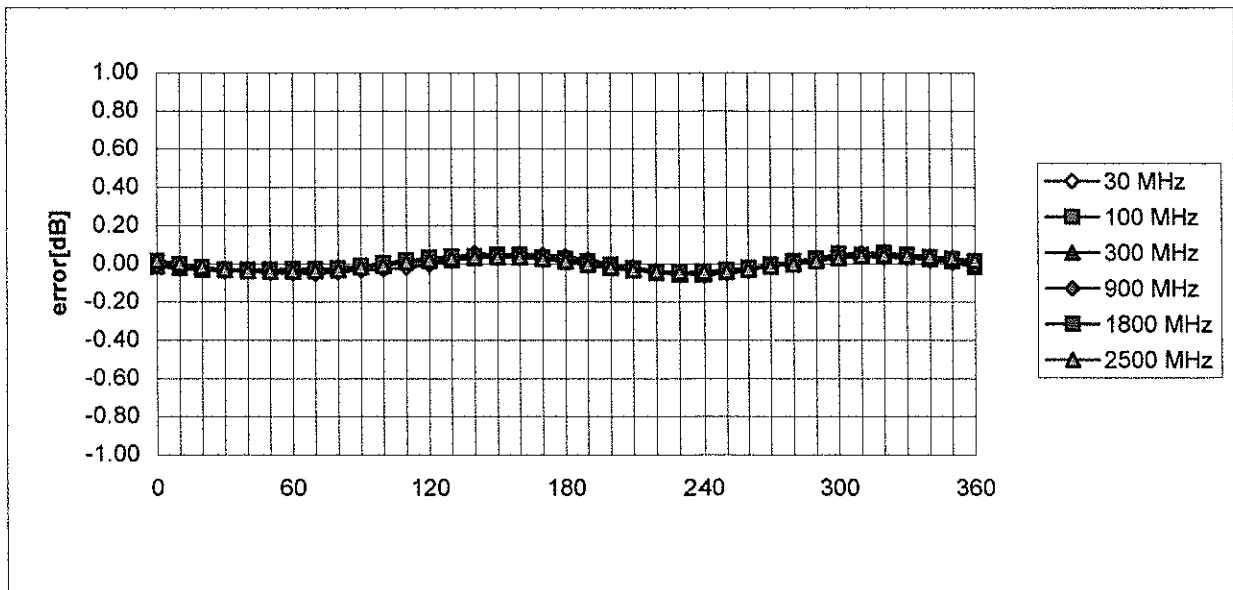


Frequency Response of E-Field


(TEM-Cell:ifi110, Waveguide R22)

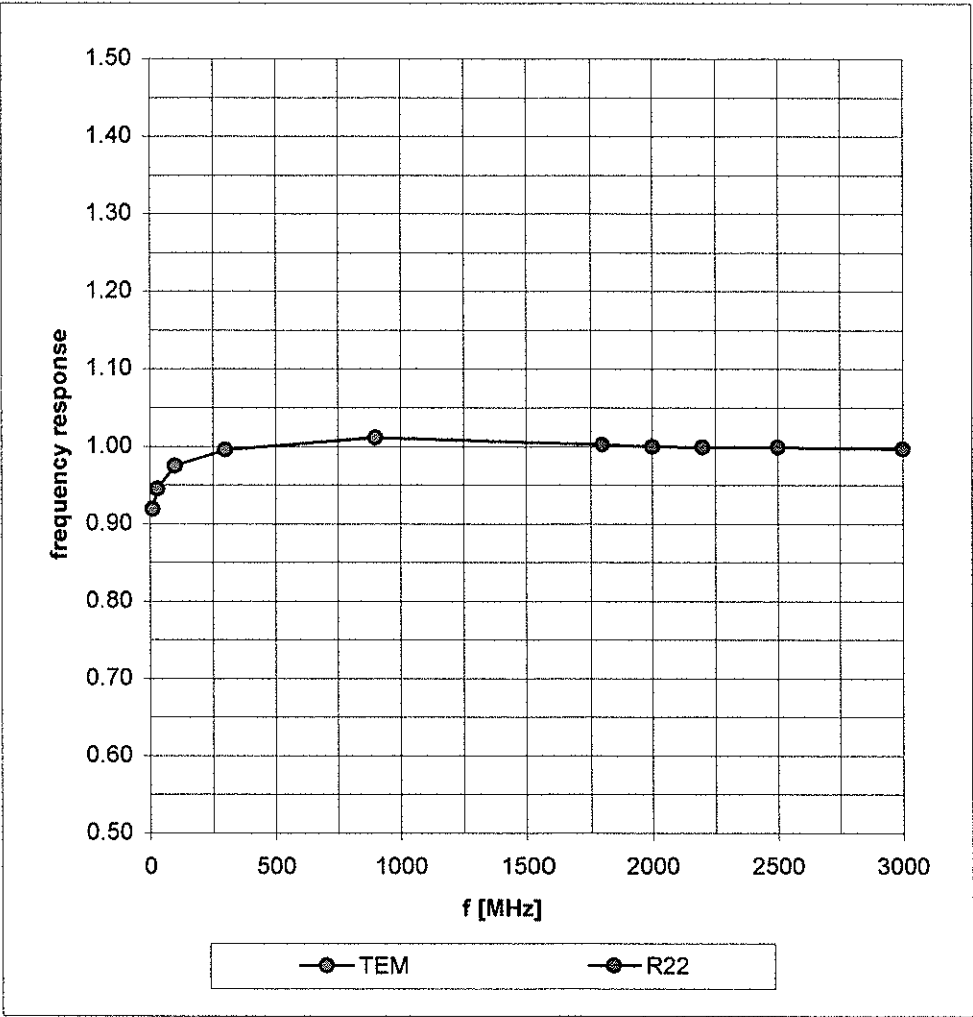

Dynamic Range $f(\text{SAR}_{\text{brain}})$ (Waveguide R22)

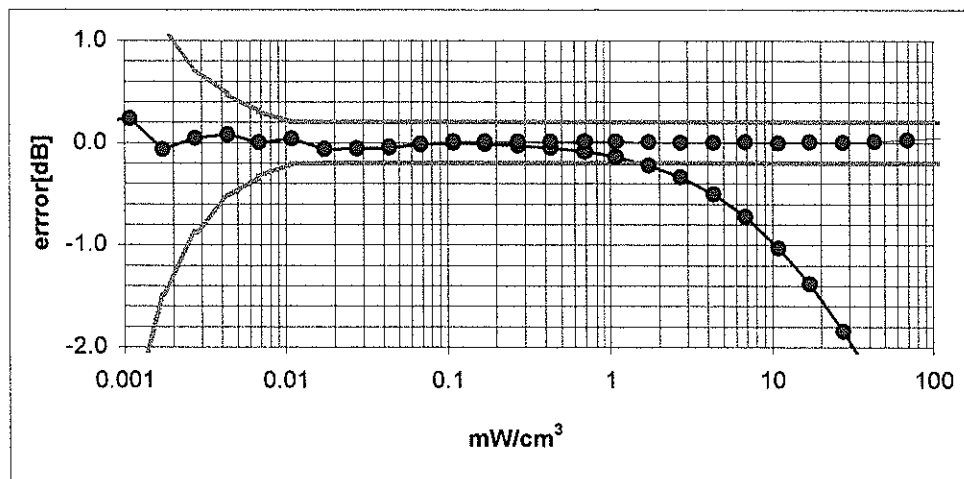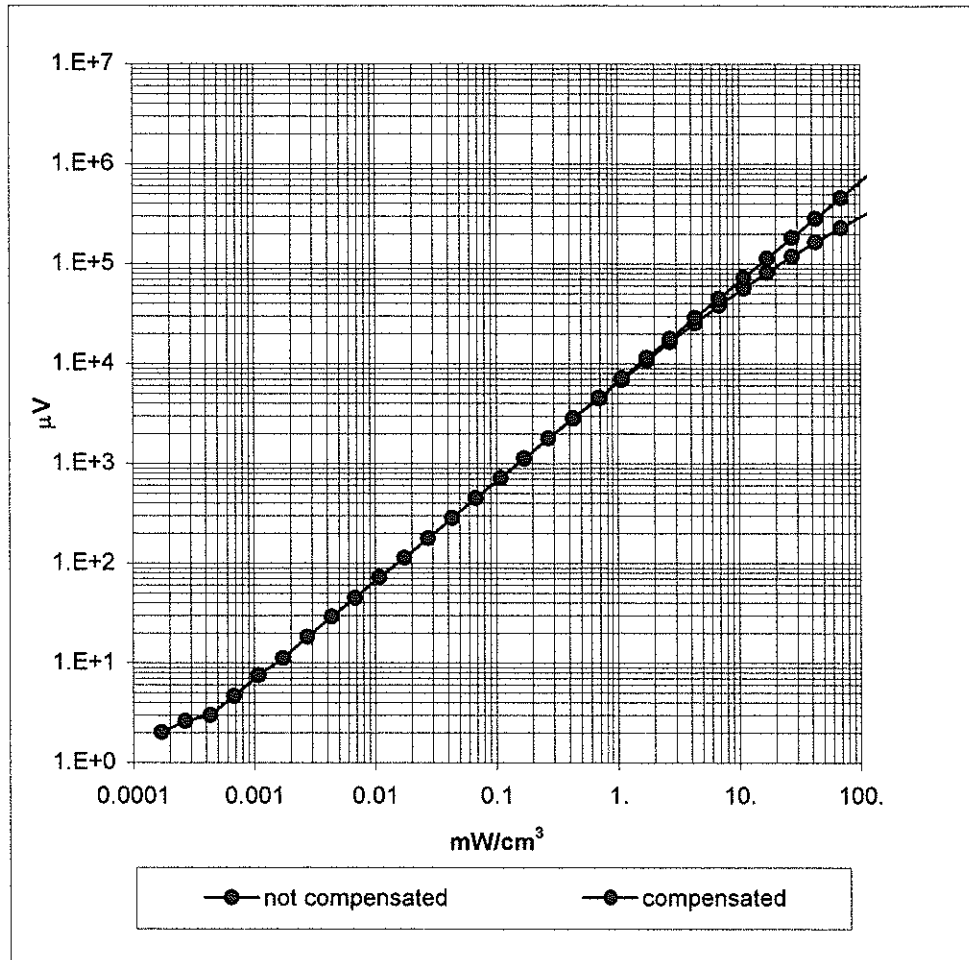


Conversion Factor Assessment

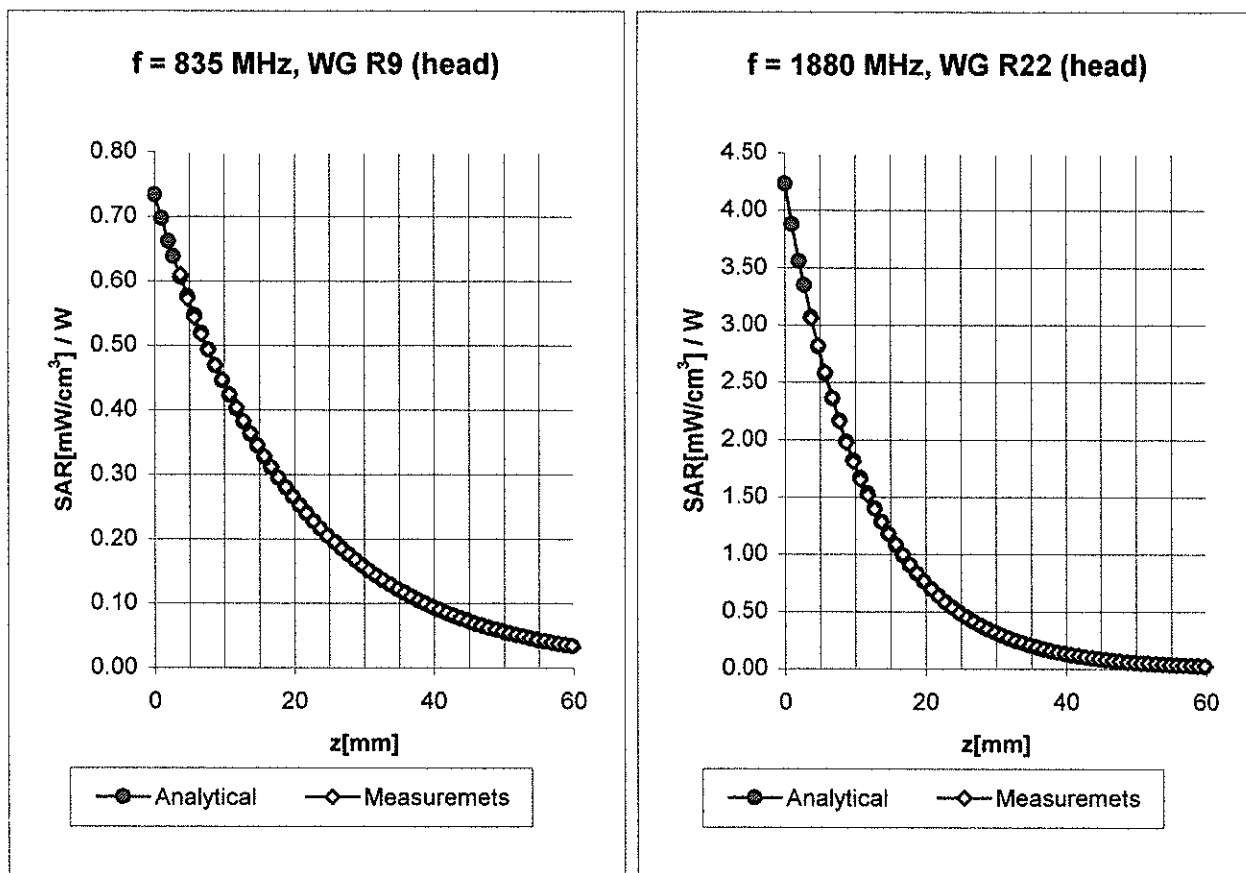

Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
	ConvF X	$7.0 \pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	$7.0 \pm 9.5\%$ (k=2)	Alpha 0.21
	ConvF Z	$7.0 \pm 9.5\%$ (k=2)	Depth 3.66
Head	1880 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
	ConvF X	$5.6 \pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	$5.6 \pm 9.5\%$ (k=2)	Alpha 0.43
	ConvF Z	$5.6 \pm 9.5\%$ (k=2)	Depth 2.63


Conversion Factor Assessment

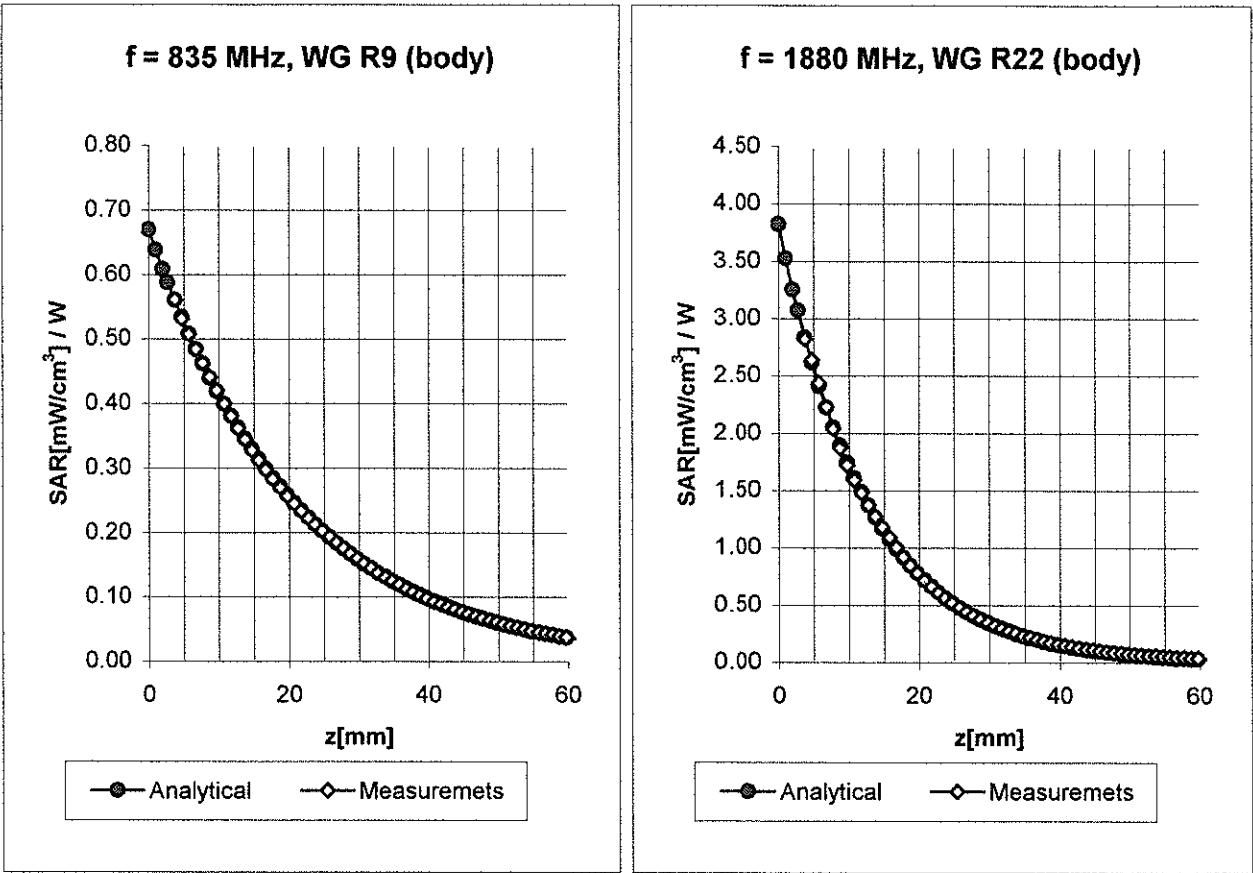

Body	835 MHz	$\epsilon_r = 55.2 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Body	900 MHz	$\epsilon_r = 55.0 \pm 5\%$	$\sigma = 1.05 \pm 5\%$ mho/m
	ConvF X	6.7 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.7 $\pm 9.5\%$ (k=2)	Alpha 0.30
	ConvF Z	6.7 $\pm 9.5\%$ (k=2)	Depth 2.69
Body	1880 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
Body	1800 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
	ConvF X	5.0 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.0 $\pm 9.5\%$ (k=2)	Alpha 0.58
	ConvF Z	5.0 $\pm 9.5\%$ (k=2)	Depth 2.32

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

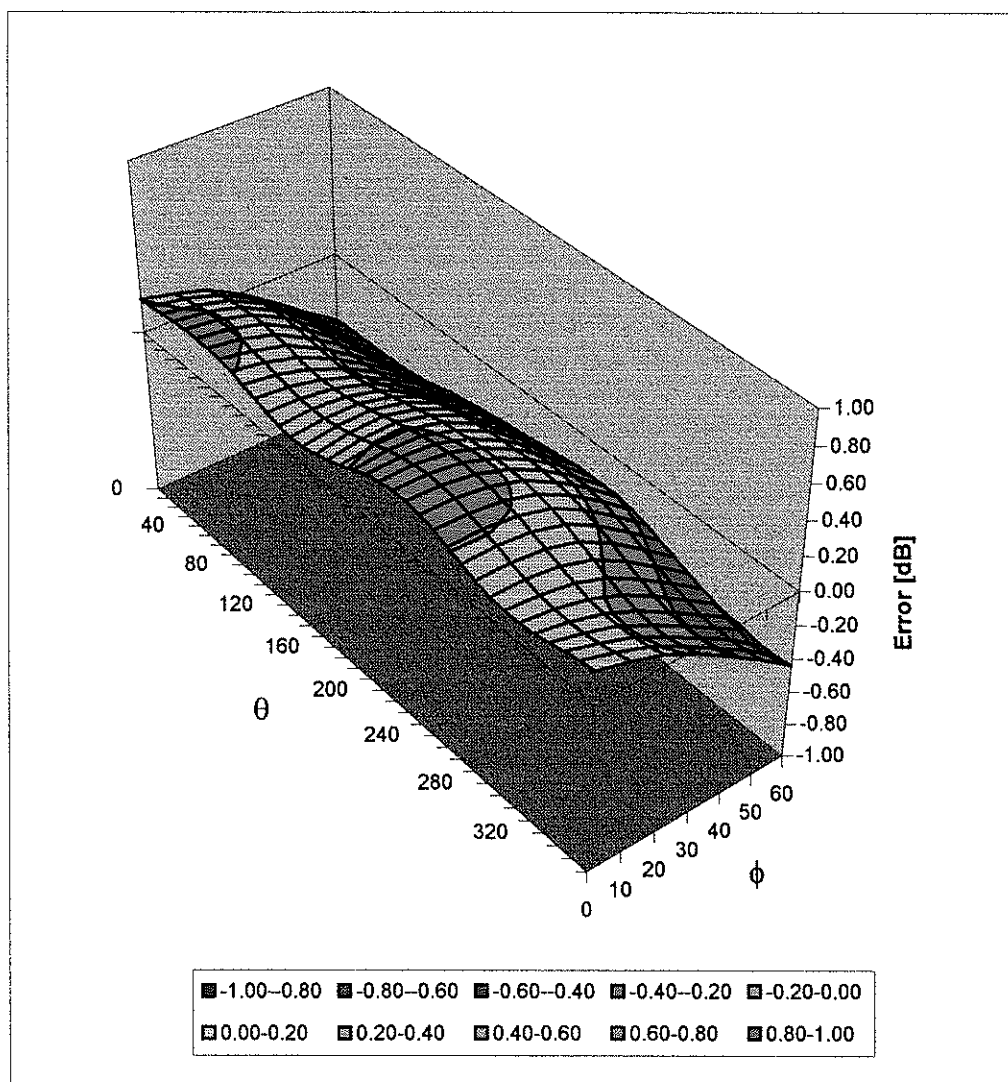

APPENDIX D: DIPOLE VALIDATION KIT REPORT(S)

Client **Nokia Inc. Texas**

CALIBRATION CERTIFICATE

Object(s) **D835V2 - SN:486**

Calibration procedure(s) **QA CAL-05.v2
Calibration procedure for dipole validation kits**

Calibration date: **May 26, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.


All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00 (Agilent, No. 8702K064602)	In house check: May 03

	Name	Function	Signature
Calibrated by:	Judith Mueller	Technician	

Approved by:	Katja Pokovic	Laboratory Director
--------------	---------------	---------------------



Date issued: May 26, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY

Dipole Validation Kit

Type: D835V2

Serial: 486

Manufactured: May 19, 2003
Calibrated: May 26, 2003

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	42.8	$\pm 5\%$
Conductivity	0.89 mho/m	$\pm 5\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.7 at 835 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was $250 \text{ mW} \pm 3 \%$. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm^3 (1 g) of tissue:	9.80 mW/g $\pm 16.8 \%$ (k=2) ¹
averaged over 10 cm^3 (10 g) of tissue:	6.40 mW/g $\pm 16.2 \%$ (k=2) ¹

¹ validation uncertainty

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.389 ns	(one direction)
Transmission factor:	0.989	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz:	$\text{Re}\{Z\} = 50.5 \Omega$
---------------------------------	--------------------------------

	$\text{Im}\{Z\} = -2.9 \Omega$
--	--------------------------------

Return Loss at 835 MHz	-30.7 dB
------------------------	-----------------

4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

5. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

6. Power Test

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Date/Time: 05/26/03 17:23:08

Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: SN486_SN1507_HSL835_260503.da4

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN486
Program: Dipole Calibration

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz ($\sigma = 0.89$ mho/m, $\epsilon_r = 42.8$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.7, 6.7, 6.7); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 56.8 V/m

Power Drift = -0.004 dB

Maximum value of SAR = 2.61 mW/g

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.6 mW/g

Reference Value = 56.8 V/m

Power Drift = -0.004 dB

Maximum value of SAR = 2.61 mW/g

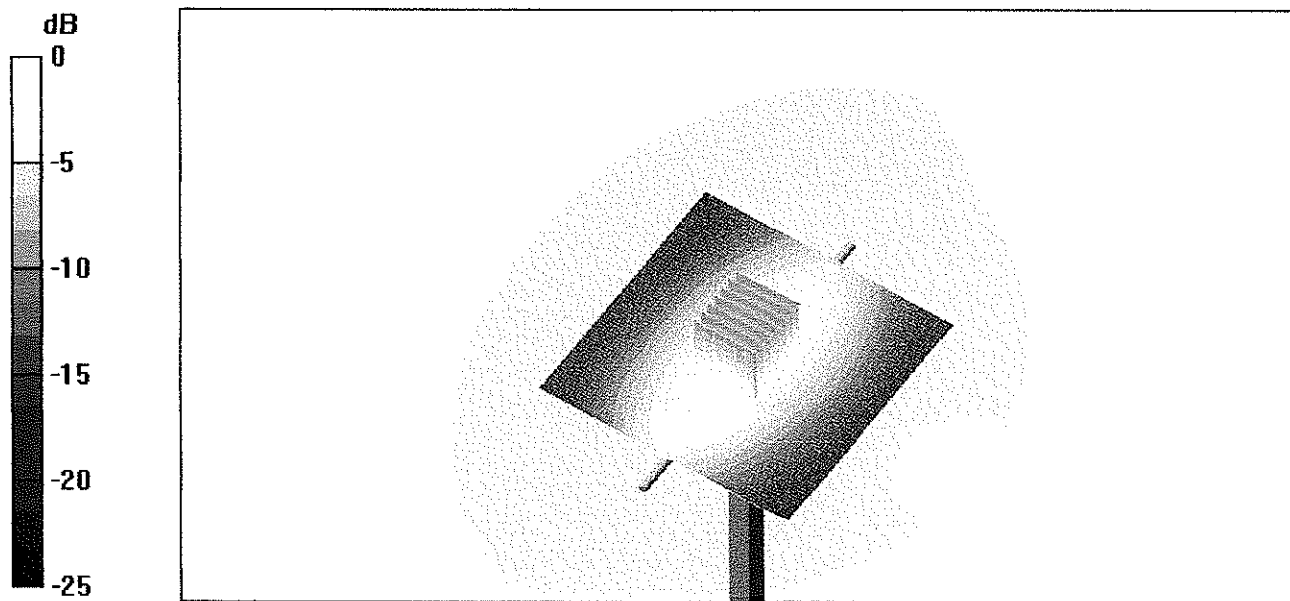

0 dB = 2.61mW/g

26 May 2003 14:28:05

CH1 S11 1 U FS 1: 50.514 Ω -2.8906 Ω 65.939 pF 835.000 000 MHz


↑

Del

PRM

Cor
Avg
16


↑

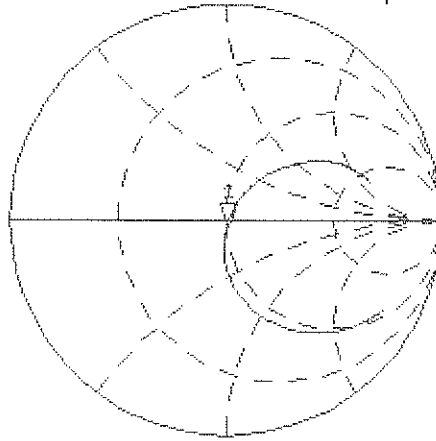

CH2 S11 LOG 4 dB/REF -20 dB 1: -38.690 dB 835.000 000 MHz

PRM
Cor

↑

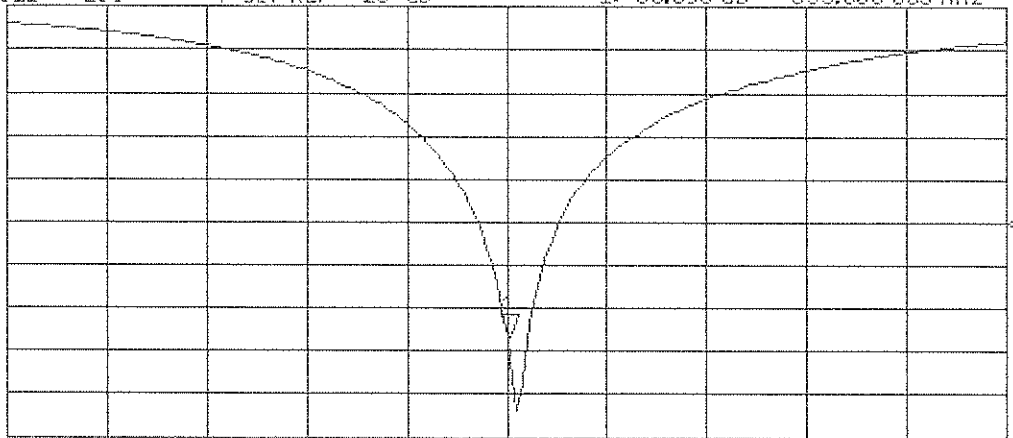

CENTER 835.000 000 MHz

SPAN 400.000 000 MHz

Client

Nokia Inc. Texas

CALIBRATION CERTIFICATE

Object(s)

D835V2 - SN:487

Calibration procedure(s)

QA CAL-05 v2
Calibration procedure for dipole validation kits

Calibration date:

July 17, 2003

Condition of the calibrated item

In Tolerance (according to the specific calibration document)

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03

Calibrated by:

Name

Judith Mueller

Function

Technician

Signature



Approved by:

Katja Pokovic

Laboratory Director



Date issued: July 17, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY

Dipole Validation Kit

Type: D835V2

Serial: 487

Manufactured: May 19, 2003

Calibrated: July 17, 2003

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **body simulating solution** of the following electrical parameters at 835 MHz:

Relative Dielectricity	54.03	$\pm 5\%$
Conductivity	0.96 mho/m	$\pm 5\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.3 at 835 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was $250 \text{ mW} \pm 3 \%$. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm^3 (1 g) of tissue:	10.1 mW/g $\pm 16.8 \%$ (k=2) ¹
averaged over 10 cm^3 (10 g) of tissue:	6.64 mW/g $\pm 16.2 \%$ (k=2) ¹

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.387 ns	(one direction)
Transmission factor:	0.990	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 835 MHz:	$\text{Re}\{Z\} = 48.4 \, \Omega$
---------------------------------	-----------------------------------

	$\text{Im}\{Z\} = -4.0 \, \Omega$
--	-----------------------------------

Return Loss at 835 MHz	-27.2 dB
------------------------	-----------------

4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

5. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

6. Power Test

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Date/Time: 07/17/03 17:15:44

Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: SN487_SN1507_M835_170703.da4

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN487
Program: Dipole Calibration

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Muscle 835 MHz ($\sigma = 0.96$ mho/m, $\epsilon_r = 54.03$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.3, 6.3, 6.3); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 55.2 V/m

Power Drift = 0.009 dB

Maximum value of SAR = 2.7 mW/g

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.66 mW/g

Reference Value = 55.2 V/m

Power Drift = 0.009 dB

Maximum value of SAR = 2.71 mW/g

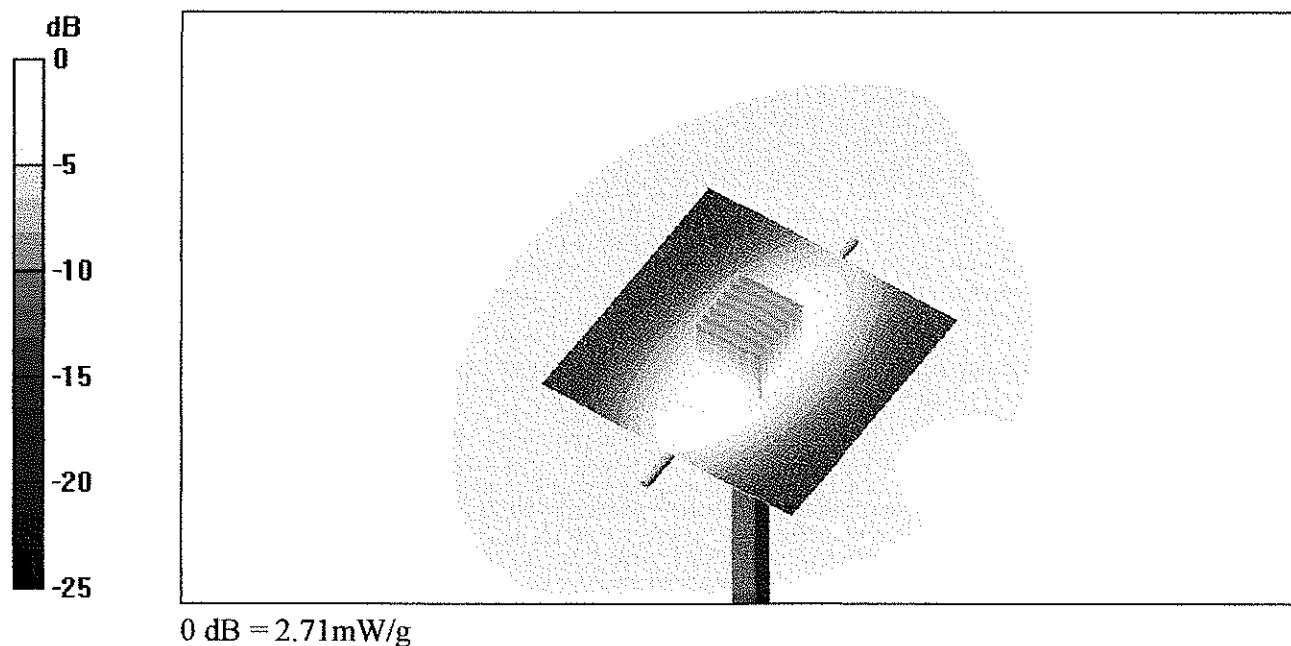

487

Body

17 Jul 2003 15:28:37
CH1 S11 1 U FS 1: 48.363 Ω -4.0430 Ω 47.145 pF 835.000 000 MHz

De1


PRm

Cor

Avg

16

↑

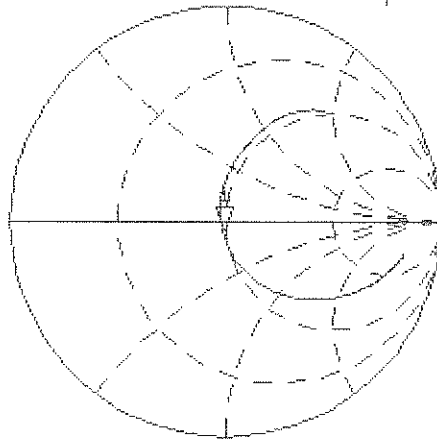


CH2 S11 LOG 4 dB/REF -20 dB 1:-27.241 dB 835.000 000 MHz

PRm

Cor

↑

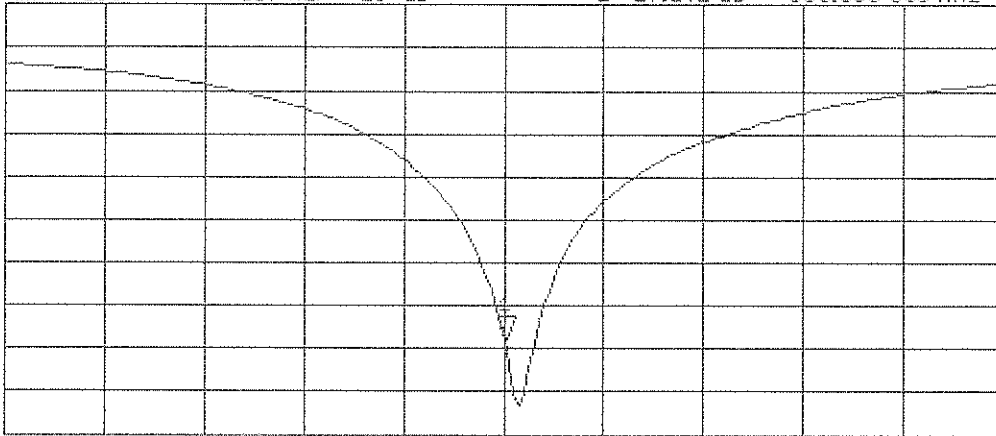

CENTER 835.000 000 MHz

SPAN 400.000 000 MHz

Client

Nokia Inc. Texas

CALIBRATION CERTIFICATE

Object(s)

D1900V2 - SN:504

Calibration procedure(s)

QA CAL-05.v2
Calibration procedure for dipole validation kits

Calibration date:

July 16, 2003

Condition of the calibrated item

In Tolerance (according to the specific calibration document)

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03

Calibrated by:

Name

Judith Mueller

Function

Technician


Signature



Approved by:

Katja Pokovic

Laboratory Director



Date issued: July 17, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY

Dipole Validation Kit

Type: D1900V2

Serial: 504

Manufactured: August 25, 1999

Calibrated: July 16, 2003

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters at 1900 MHz:

Relative Dielectricity	40.2	$\pm 5\%$
Conductivity	1.46 mho/m	$\pm 5\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 5.2 at 1900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was $250\text{mW} \pm 3\%$. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm^3 (1 g) of tissue: **40.8 mW/g $\pm 16.8\%$ ($k=2$)¹**

averaged over 10 cm^3 (10 g) of tissue: **21.2 mW/g $\pm 16.2\%$ ($k=2$)¹**

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.180 ns	(one direction)
Transmission factor:	0.995	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz:	$\text{Re}\{Z\} = 49.1 \Omega$
----------------------------------	--------------------------------

	$\text{Im}\{Z\} = -3.8 \Omega$
--	--------------------------------

Return Loss at 1900 MHz	-28.0 dB
-------------------------	-----------------

4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating glycol solution of the following electrical parameters at 1900 MHz:

Relative Dielectricity	50.9	$\pm 5\%$
Conductivity	1.60 mho/m	$\pm 5\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 4.8 at 1900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was $250\text{mW} \pm 3\%$. The results are normalized to 1W input power.

5. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **42.0 mW/g ± 16.8 % (k=2)²**

averaged over 10 cm³ (10 g) of tissue: **21.8 mW/g ± 16.2 % (k=2)²**

6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 1900 MHz: **Re{Z} = 43.3 Ω**

Im {Z} = -2.3Ω

Return Loss at 1900 MHz **-22.4 dB**

7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

9. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Date/Time: 07/16/03 17:31:56

Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: SN504_SN1507_HSL1900_160703.da4

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN504
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz ($\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 40.17$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 93.5 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 11.4 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.29 mW/g

Reference Value = 93.5 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 11.4 mW/g

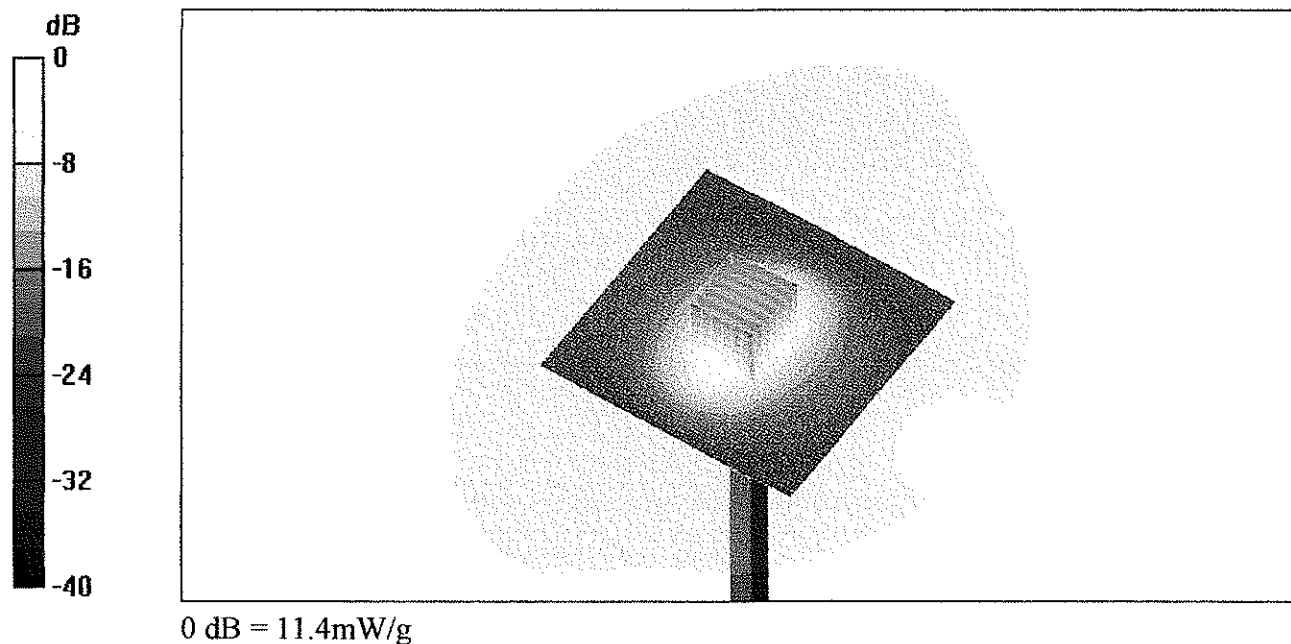

16 Jul 2003 12:42:57

CH1 S11 985.7 mV FS 1: 49.102 Ω -3.8398 Ω 21.815 pF 1 900.000 000 MHz

↑

De1


PRM

Cor

Avg

16

↑

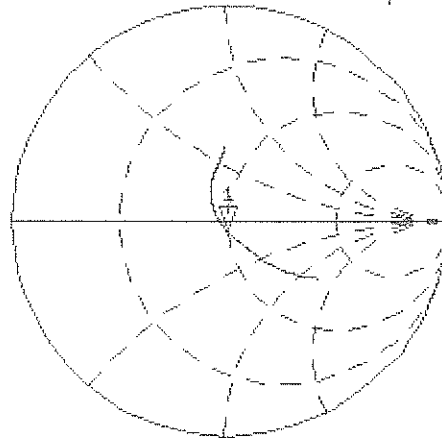


CH2 S11 LOG 4 dB/REF -20 dB 1:-28.015 dB 1 900.000 000 MHz

PRM

Cor

↑

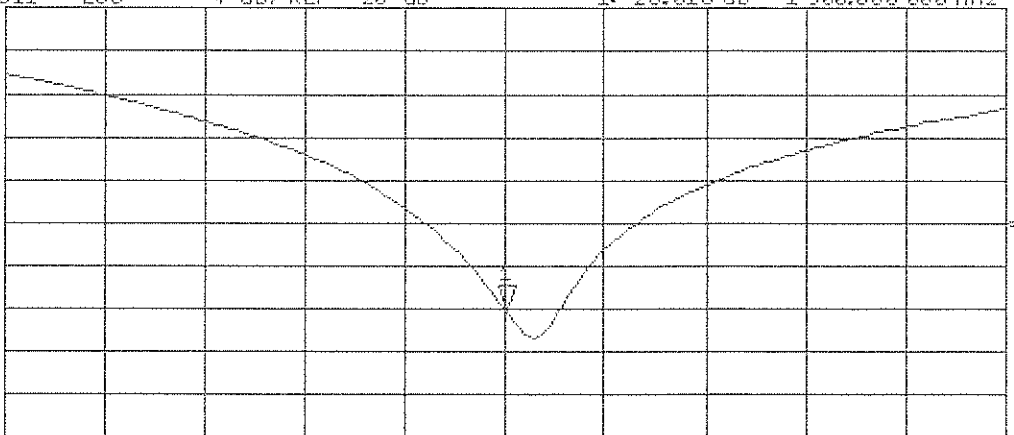

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

Date/Time: 07/16/03 11:37:18

Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: SN504_SN1507_M1900_160703.da4

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN504
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz ($\sigma = 1.6 \text{ mho/m}$, $\epsilon_r = 50.87$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 92 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 11.7 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.45 mW/g

Reference Value = 92 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 11.8 mW/g

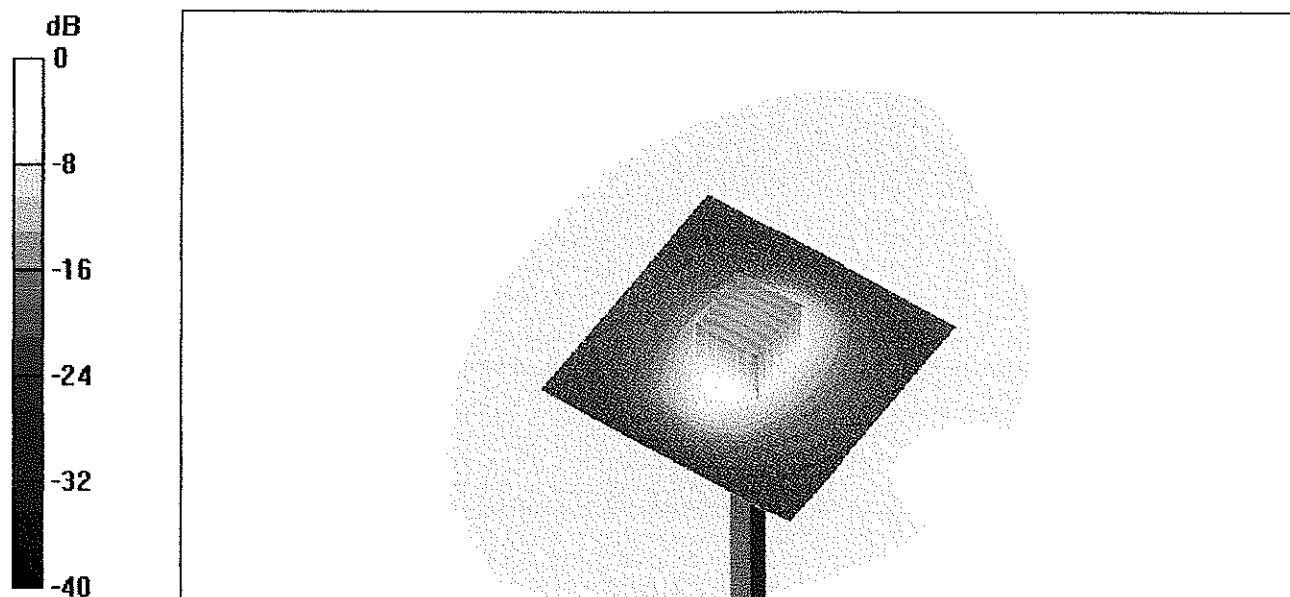

0 dB = 11.8mW/g

504
Body

15 Jul 2003 07:56:20

CH1 S11 985.7 mU FS 1: 43.270 Ω -2.2988 Ω 36.438 pF 1 900.000 000 MHz

De1


PRm

Cor

Avg

16

↑

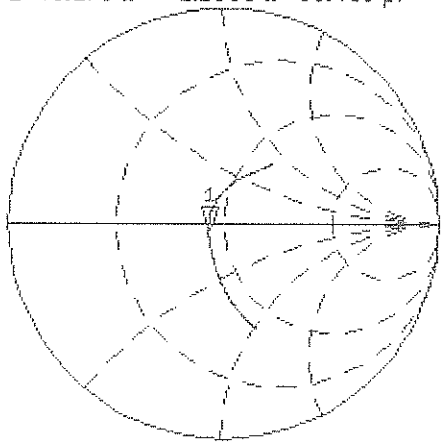


CH2 S11 LOG 4 dB/REF -20 dB 1:-22.365 dB 1 900.000 000 MHz

PRm

Cor

↑

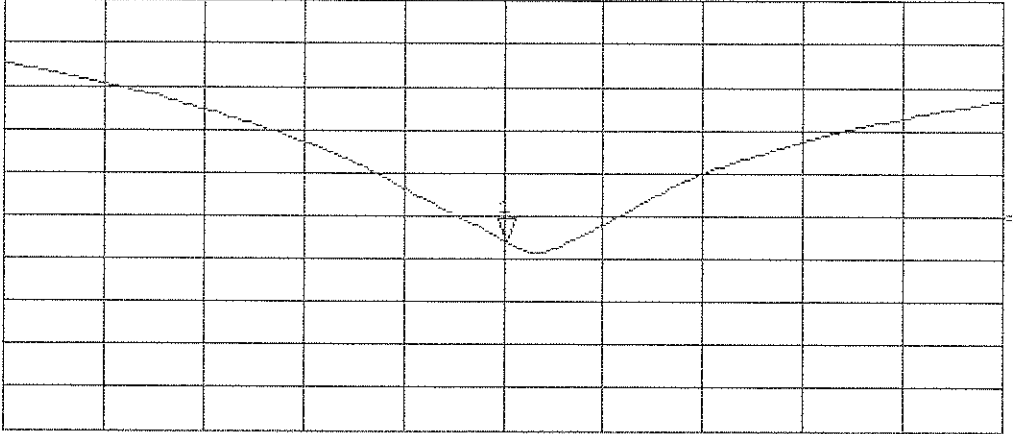

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

3457

Calibration Certificate

1900 MHz System Validation Dipole

Type:

D1900V2

Serial Number:

5d004

Place of Calibration:

Zurich

Date of Calibration:

July 17, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Velled

Approved by:

Polonic Katya

DASY3

Dipole Validation Kit

Type: D1900V2

Serial: 5d004

Manufactured: February 14, 2002

Calibrated: July 17, 2002

1. Measurement Conditions

The measurements were performed in the flat section of the new SAM twin phantom filled with head simulating solution of the following electrical parameters at 1900 MHz:

Relative permittivity	39.8	$\pm 5\%$
Conductivity	1.46 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.2 at 1900 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was $250\text{mW} \pm 3\%$. The results are normalized to 1W input power.

2.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm^3 (1 g) of tissue:	44.0 mW/g
averaged over 10 cm^3 (10 g) of tissue:	22.7 mW/g



2.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm^3 (1 g) of tissue:	40.4 mW/g
averaged over 10 cm^3 (10 g) of tissue:	21.3 mW/g



Validation Dipole D1900V2 SN5d004, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(5.20,5.20,5.20) at 1900 MHz; IEEE1528 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 39.8$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: 20.5 mW/g $\pm 0.01 \text{ dB}$, SAR (1g): 11.0 mW/g $\pm 0.01 \text{ dB}$, SAR (10g): 5.68 mW/g $\pm 0.01 \text{ dB}$, (Worst-case extrapolation)
Penetration depth: 8.1 (7.8, 8.8) [mm]
Powerdrift: -0.01 dB

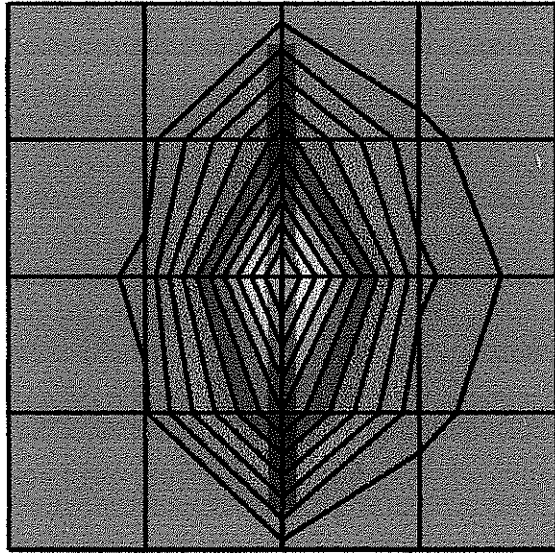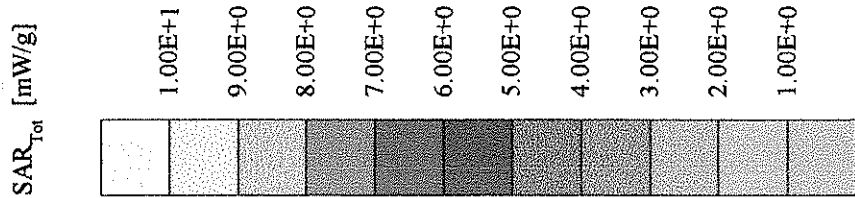

Validation Dipole D1900V2 SN5d004, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(5.20,5.20,5.20) at 1900 MHz; IEEE1528 1900 MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 39.8$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: $17.7 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (1g): $10.1 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (10g): $5.32 \text{ mW/g} \pm 0.01 \text{ dB}$, (Advanced extrapolation)
Penetration depth: $8.7 (8.6, 8.9) [\text{mm}]$
Powerdrift: -0.01 dB

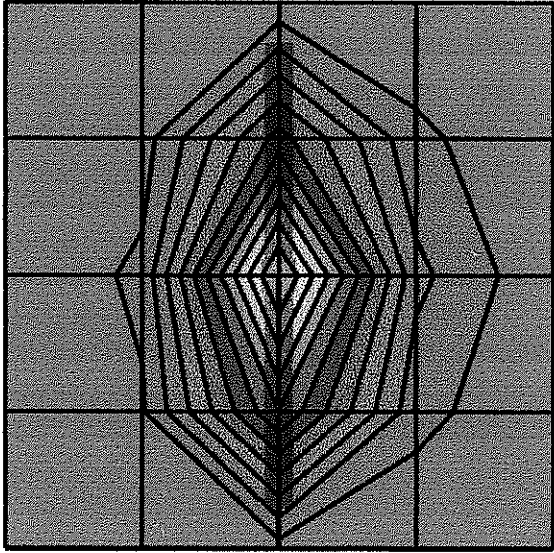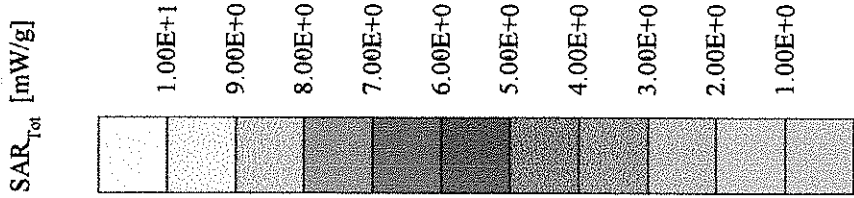

17 Jul 2002 09:51:09

CH1 S11 1 U FS

1: 50.549 Ω 3.5332 Ω 295.96 μ H

1 900.000 000 MHz

↑

Del


PRM

Cor

Avg

16

↑

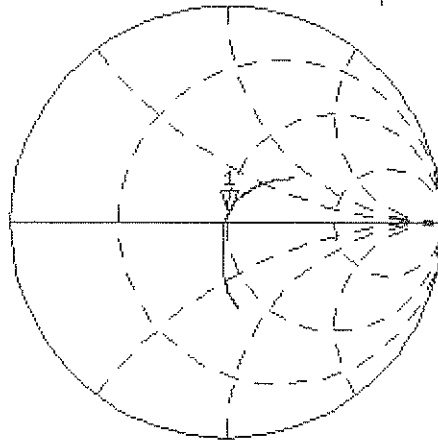


CH2 S11 LOG 5 dB/REF 0 dB

1: -29.069 dB 1 900.000 000 MHz

PRM

Cor

↑

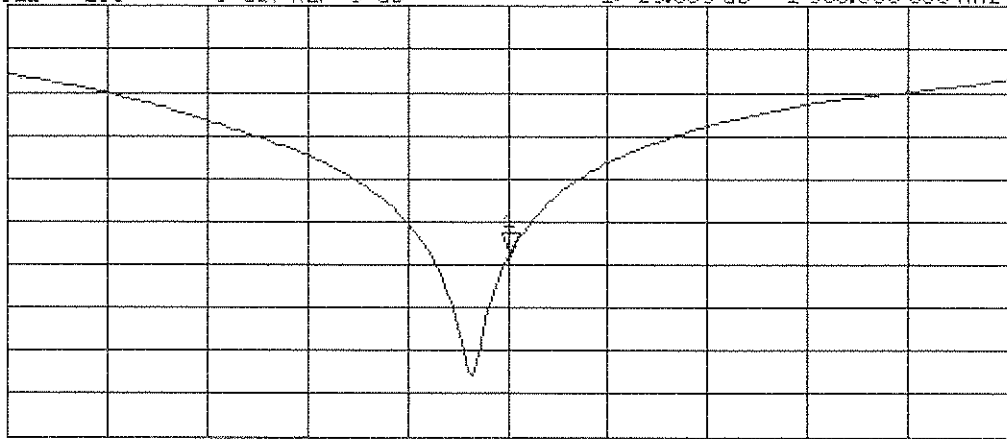

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.179 ns	(one direction)
Transmission factor:	0.989	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz:	$\text{Re}\{Z\} = 50.5 \Omega$
	$\text{Im}\{Z\} = 3.5 \Omega$
Return Loss at 1900 MHz	- 29.1 dB

4. Measurement Conditions

The measurements were performed in the flat section of the new SAM twin phantom filled with body simulating solution of the following electrical parameters at 1900 MHz:

Relative permittivity	54.4	$\pm 5\%$
Conductivity	1.57 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 4.9 at 1900 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

5.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **44.0 mW/g**

averaged over 10 cm³ (10 g) of tissue: **22.9 mW/g**

5.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **40.4 mW/g**

averaged over 10 cm³ (10 g) of tissue: **21.4 mW/g**

6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz: **Re{Z} = 46.7 Ω**

Im {Z} = 3.6 Ω

Return Loss at 1900 MHz **- 25.9 dB**

7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.



Small end caps have been added to the dipole arms in order to improve matching when loaded according to the position as explained in Section 1. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

9. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



Validation Dipole D1900V2 SN5d004, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(4.90,4.90,4.90) at 1900 MHz; IEEE1528 1900 MHz: $\sigma = 1.57 \text{ mho/m}$ $\epsilon_r = 54.4$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: 20.4 mW/g $\pm 0.00 \text{ dB}$, SAR (1g): 11.0 mW/g $\pm 0.01 \text{ dB}$, SAR (10g): 5.73 mW/g $\pm 0.02 \text{ dB}$, (Worst-case extrapolation)
Penetration depth: 8.5 (8.0, 9.5) [mm]
Powerdrift: 0.00 dB

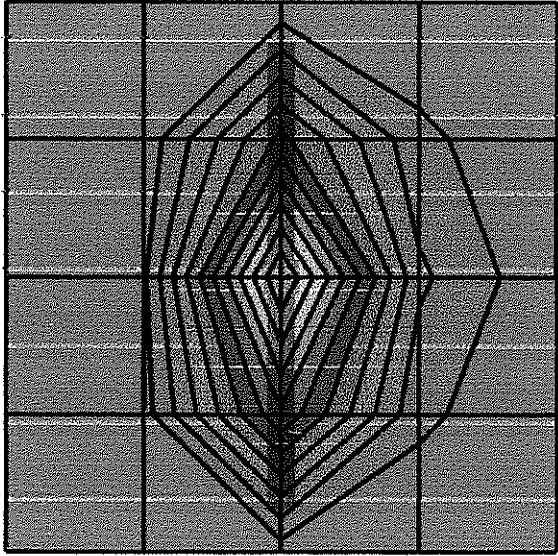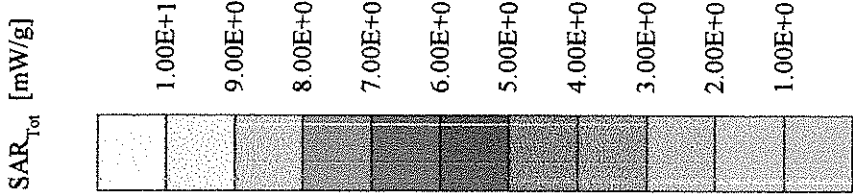

Validation Dipole D1900V2 SN5d004, d = 10 mm

Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(4.90,4.90,4.90) at 1900 MHz; IEEE1528 1900 MHz: $\sigma = 1.57 \text{ mho/m}$ $\epsilon_r = 54.4$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: $17.5 \text{ mW/g} \pm 0.00 \text{ dB}$, SAR (1g): $10.1 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (10g): $5.36 \text{ mW/g} \pm 0.02 \text{ dB}$, (Advanced extrapolation)
Penetration depth: 9.3 (9.1, 9.6) [mm]
Powerdrift: 0.00 dB

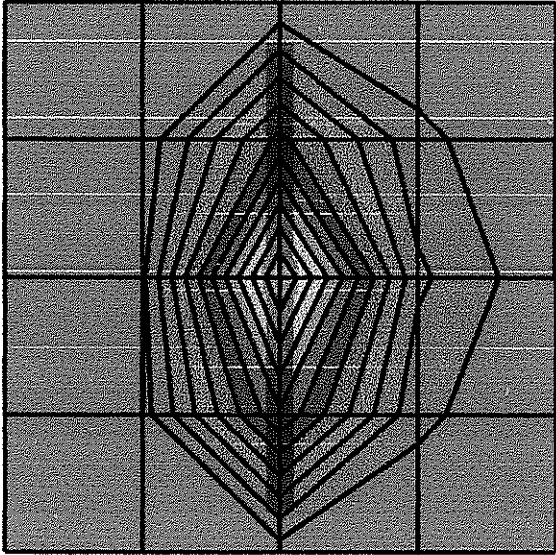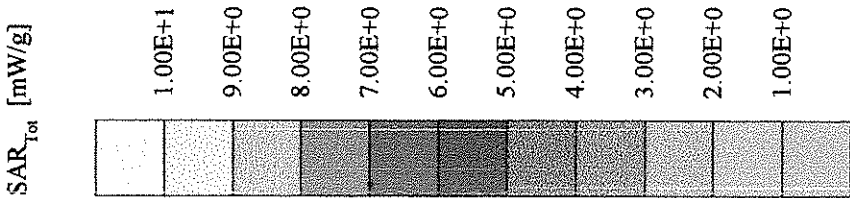

16 Jul 2002 14:06:45

CH1 S11 1 U FS

1: 45.686 Ω 3.6289 Ω 303.98 μ H

1 900.000 000 MHz

γ

Mosde

Del


PRM

Cor

Avg

16

↑

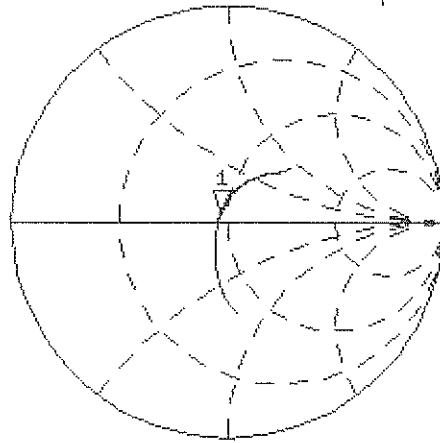

CH2 S11 LOG 5 dB/REF 0 dB


1: -25.882 dB

1 900.000 000 MHz

PRM

Cor

↑

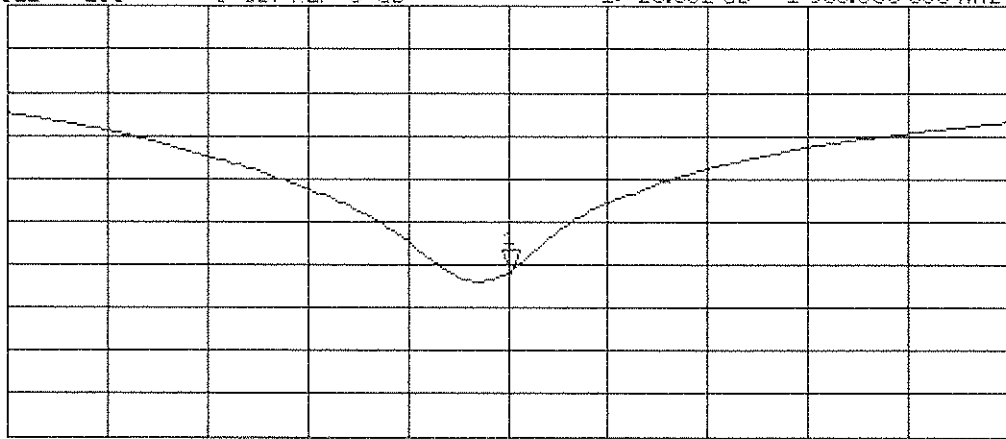

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

APPENDIX E: SCOPE OF ACCREDITATION FOR A2LA

TCC-Dallas is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below:





American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

NOKIA MOBILE PHONES
TEST & CERTIFICATION CENTER - DALLAS
6021 Connection Drive
Irving, TX 75039
Alan Ewing Phone: 972.894.4744

ELECTRICAL

Valid to: November 30, 2003

Certificate Number: 1819-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC), Specific Absorption Rate (SAR), and tests on wireless communications devices:

Tests Test Method

Emissions

Conducted and Radiated

CFR 47 Part 2, 15, 22, 24
CISPR 22, EN 55022
ICES-003, RSS-128, 132 and 133
3GPP TS 51.010-1 Section 12.2
ETSI EN 301 489-1; EN 301 489-7
(using ANSI C63.4 and RSS-212)

Specific Absorption Rate

IEEE 1528
EN 50360; EN 50361
CFR 47 Parts 2 and 24
OET Bulletin 65 and Supplement C
RSS-102

Immunity

Vehicular Immunity

Electrostatic Discharge (ESD)

RF Radiated

Electrical Fast Transient/Burst

Surge

Conducted

Voltage Dips, Short Interruptions and

Voltage Variations

ISO 7637-1; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-2; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-3; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-4; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-5; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-6; ETSI EN 301 489-1; EN 301 489-7
EN 61000-4-11; ETSI EN 301 489-1; EN 301 489-7

Tests

Wireless

GSM (850/900/1800/1900 MHz)

TDMA

Test Method

3GPP TS 51.010-1, -2, -3
3GPP TS 11.10-4
ETCRB N4PRD.03

CTIA TDMA/AMPS Test Plan (excluding Sections 7.3.3 & 7.3.4)
TIA/EIA-136-270

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined to be in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, such data would not be covered by this laboratory's A2LA accreditation.