



FCC RF Test Report

APPLICANT : ASKEY COMPUTER CORP.
EQUIPMENT : Module
BRAND NAME : ASKEY
MODEL NAME : NMQ2210
FCC ID : H8NNMQ2210-D187
STANDARD : 47 CFR Part 27 Subpart O (3700-3980MHz)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Aug. 12, 2024 ~ Sep 02, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum Conducted Power and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power and EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 Occupied Bandwidth	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test	20
4.4 Radiated Spurious Emission	21
5 LIST OF MEASURING EQUIPMENT	22
6 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471806N	Rev. 01	Initial issue of report	Dec. 05, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 3.06 dB at 11527.5 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

ASKEY COMPUTER CORP.

10F, No.119, Jiankang Rd., Zhonghe Dist., New Taipei City, Taiwan

1.2 Manufacturer

ASKEY COMPUTER CORP.

10F, No.119, Jiankang Rd., Zhonghe Dist., New Taipei City, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Module
Brand Name	ASKEY
Model Name	NMQ2210
FCC ID	H8NNMQ2210-D187
IMEI Code	Conducted: 355241830363892 Radiation: 355241830363652
HW Version	REV3
SW Version	NMQ2210_NA_V4.2.25.1
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz
SCS	30kHz
Bandwidth	n77 (30kHz): 10 / 15 / 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 0/1/2/3> 5G NR n77: -0.5 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. Only the maximum conducted power & EIRP of Ant.3 for 5G NR n77 is shown in the report.
2. The device supports n77(1T4R) SRS resources on Antenna 0/1/2/3, only the test data of worst Antenna 3 is showed in the report according to the maximum power.
3. 5G NR n77 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
4. 5G NR n77 supports UL MIMO mode for Ant.0+3, and only supports CP-OFDM modulation in UL MIMO mode.
5. The 5G NR n77 MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

6. For UL MIMO mode, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{\text{ANT}})$ according to KDB 662911 D01.
7. The device supports HPUE(PC2) for 5G NR n77 SISO mode, and HPUE(PC1.5) for n77 UL MIMO mode.
8. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
9. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.4898	8M59G7D	0.3855	8M60W7D
15	3705.52 ~ 3972.48	0.5129	13M6G7D	0.3855	13M6W7D
20	3710.01 ~ 3969.99	0.4920	18M2G7D	0.4178	18M2W7D
30	3715.02 ~ 3964.98	0.4955	27M9G7D	0.3990	27M9W7D
40	3720.00 ~ 3960.00	0.5129	37M9G7D	0.4395	38M0W7D
50	3725.01 ~ 3954.99	0.5188	47M5G7D	0.4140	47M6W7D
60	3730.02 ~ 3949.98	0.4764	57M8G7D	0.3864	57M8W7D
70	3735.00 ~ 3945.00	0.4677	67M5G7D	0.3864	67M7W7D
80	3740.01 ~ 3939.99	0.4710	77M5G7D	0.3908	77M6W7D
90	3745.02 ~ 3934.98	0.4699	87M6G7D	0.3631	87M6W7D
100	3750.00 ~ 3930.00	0.5200	97M4G7D	0.3899	97M6W7D



5G NR n77 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.7031	8M60G7D	0.6516	8M61W7D
15	3705.52 ~ 3972.48	0.7031	13M6G7D	0.6397	13M6W7D
20	3710.01 ~ 3969.99	0.7112	18M3G7D	0.6577	18M2W7D
30	3715.02 ~ 3964.98	0.7345	27M8G7D	0.6622	27M9W7D
40	3720.00 ~ 3960.00	0.7499	37M9G7D	0.6745	37M9W7D
50	3725.01 ~ 3954.99	0.7079	47M4G7D	0.6412	47M5W7D
60	3730.02 ~ 3949.98	0.6592	57M7G7D	0.6026	58M0W7D
70	3735.00 ~ 3945.00	0.6637	67M5G7D	0.6039	67M6W7D
80	3740.01 ~ 3939.99	0.6607	77M5G7D	0.6095	77M6W7D
90	3745.02 ~ 3934.98	0.6683	87M6G7D	0.6166	87M8W7D
100	3750.00 ~ 3930.00	0.7551	97M6G7D	0.6622	97M7W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #			Test Channel			
		10	15	20	25	30	40	50	60	70~90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Partial	Full	L	M	H	
Max. Output Power	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Peak-to-Average Ratio	n77			v	-							v	v						v		v		
26dB and 99% Bandwidth	n77	v	v	v	-	v	v	v	v	v	v		v	v	v	v			v		v		
Conducted Band Edge	n77	v			-			v			v	v	v				v		v	v		v	
Conducted Spurious Emission	n77	v			-			v			v	v	v				v			v	v	v	
Frequency Stability	n77			v	-								v						v		v		
E.I.R.P	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																				v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.4V. ; High Voltage =4.4V																						

2.2 Connection Diagram of Test System

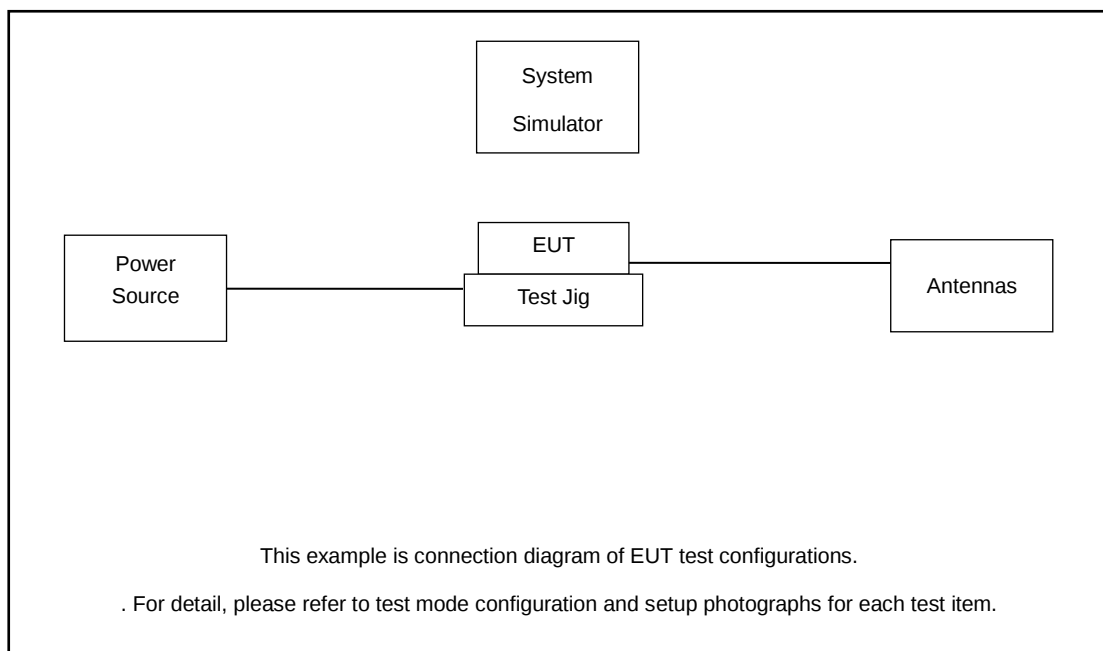

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Adapter(with cable)	N/A	N/A	N/A	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A
6.	Antenna	N/A	N/A	N/A	N/A	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 8.9dB.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 8.9 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

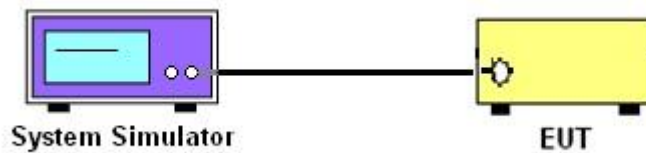

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

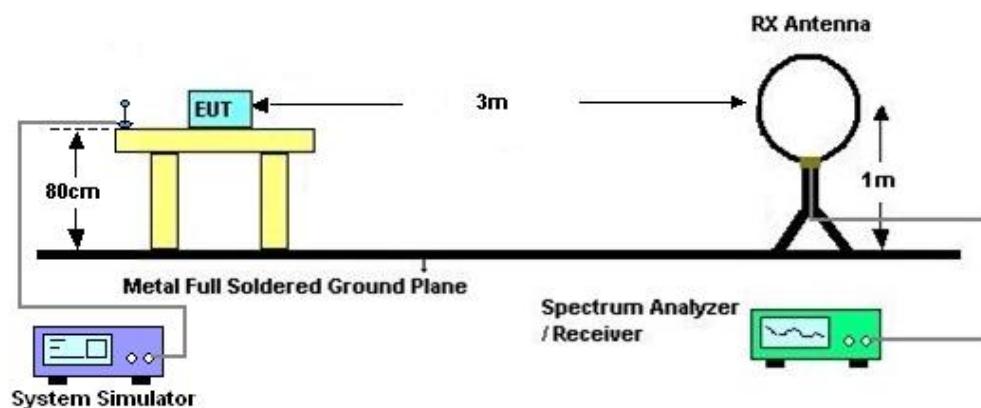

4.2.2 For radiated test from 30MHz to 1GHz

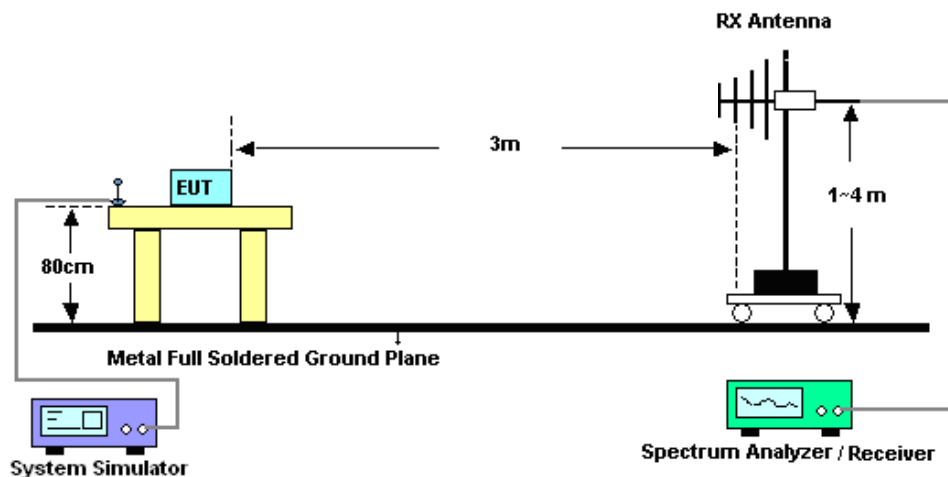

4.2.3 For radiated test above 1GHz

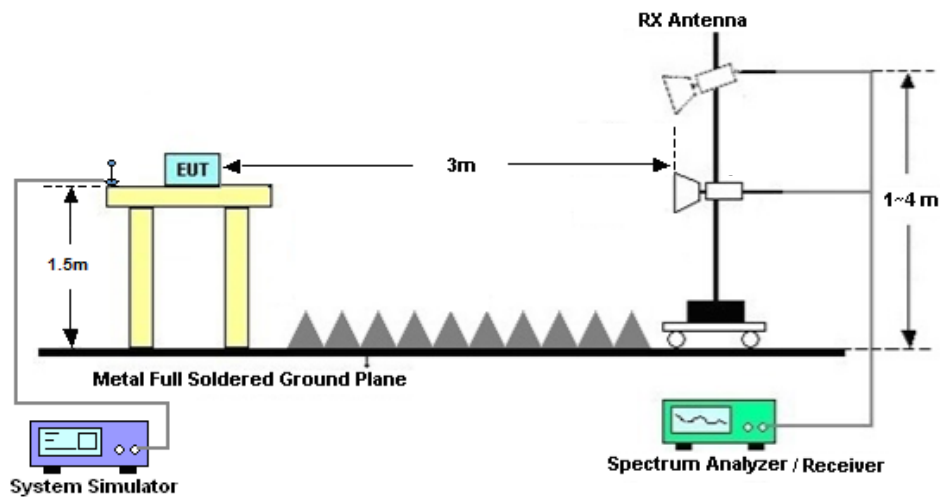

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$= P(W) - [43 + 10\log(P)] \text{ (dB)}$

$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$

$= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 12, 2024~ Aug. 27, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Aug. 12, 2024~ Aug. 27, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 12, 2024~ Aug. 27, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Aug. 12, 2024~ Aug. 27, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Sep. 02, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Sep. 02, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Sep. 02, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Sep. 02, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Sep. 02, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 09, 2024	Sep. 02, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Sep. 02, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Sep. 02, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Sep. 02, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Sep. 02, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 02, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 02, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77(ANT3)**Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.5dB**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@1	26.33	25.83	0.3828
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@1	25.46	24.96	0.3133
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@1	26.56	26.06	0.4036
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.61	25.11	0.3243
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@1	26.9	26.4	0.4365
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@1	25.86	25.36	0.3436
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@1	26.53	26.03	0.4009
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@1	25.53	25.03	0.3184
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@1	26.81	26.31	0.4276
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.86	25.36	0.3436
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@1	27.1	26.6	0.4571
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@1	25.82	25.32	0.3404
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	26.46	25.96	0.3945
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	25.44	24.94	0.3119
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	26.9	26.4	0.4365
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.89	25.39	0.3459
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	26.92	26.42	0.4385
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	26.21	25.71	0.3724
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	26.69	26.19	0.4159
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	25.61	25.11	0.3243
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	26.95	26.45	0.4416
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.8	25.3	0.3388
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	26.93	26.43	0.4395
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	26.01	25.51	0.3556
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	26.85	26.35	0.4315
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	25.92	25.42	0.3483
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	26.93	26.43	0.4395
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	26.04	25.54	0.3581
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	27.1	26.6	0.4571
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	26.43	25.93	0.3917
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	26.55	26.05	0.4027
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	25.55	25.05	0.3199
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	26.58	26.08	0.4055
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.84	25.34	0.3420
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	27.15	26.65	0.4624



77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	26.17	25.67	0.3690
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	26.39	25.89	0.3882
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	25.45	24.95	0.3126
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	26.48	25.98	0.3963
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.62	25.12	0.3251
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	26.78	26.28	0.4246
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	25.87	25.37	0.3443
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	26.45	25.95	0.3936
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	25.47	24.97	0.3141
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	26.38	25.88	0.3873
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.57	25.07	0.3214
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	26.7	26.2	0.4169
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	25.87	25.37	0.3443
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	26.51	26.01	0.3990
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	25.49	24.99	0.3155
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	26.52	26.02	0.3999
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.54	25.04	0.3192
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	26.73	26.23	0.4198
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	25.92	25.42	0.3483
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	26.38	25.88	0.3873
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	25.5	25	0.3162
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	26.5	26	0.3981
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.54	25.04	0.3192
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	26.72	26.22	0.4188
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	25.6	25.1	0.3236
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	26.55	26.05	0.4027
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	26.27	25.77	0.3776
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	26.55	26.05	0.4027
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	26.51	26.01	0.3990
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	26.15	25.65	0.3673
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	27.16	26.66	0.4634
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	25.57	25.07	0.3214
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	25.33	24.83	0.3041
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	25.72	25.22	0.3327
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	23.63	23.13	0.2056
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	23.4	22.9	0.1950
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	23.57	23.07	0.2028
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	21.09	20.59	0.1146
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	20.57	20.07	0.1016
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	20.95	20.45	0.1109
77	30	100	650000	3750	CP-OFDM QPSK	137@68	25.05	24.55	0.2851
77	30	100	650000	3750	CP-OFDM QPSK	1@1	24.72	24.22	0.2642
77	30	100	650000	3750	CP-OFDM QPSK	1@271	24.89	24.39	0.2748



77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	26.44	25.94	0.3926
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.45	25.95	0.3936
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	26.53	26.03	0.4009
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	26.42	25.92	0.3908
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	26.56	26.06	0.4036
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	26.46	25.96	0.3945
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	25.44	24.94	0.3119
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.46	24.96	0.3133
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	25.58	25.08	0.3221
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	23.49	22.99	0.1991
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	23.49	22.99	0.1991
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	23.51	23.01	0.2000
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	21	20.5	0.1122
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	20.9	20.4	0.1096
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	20.85	20.35	0.1084
77	30	100	656000	3840	CP-OFDM QPSK	137@68	24.96	24.46	0.2793
77	30	100	656000	3840	CP-OFDM QPSK	1@1	24.93	24.43	0.2773
77	30	100	656000	3840	CP-OFDM QPSK	1@271	24.86	24.36	0.2729
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	26.53	26.03	0.4009
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	26.74	26.24	0.4207
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	26.27	25.77	0.3776
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	26.36	25.86	0.3855
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	26.83	26.33	0.4295
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	26.29	25.79	0.3793
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	25.42	24.92	0.3105
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	25.91	25.41	0.3475
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	25.14	24.64	0.2911
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	23.43	22.93	0.1963
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	23.78	23.28	0.2128
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	23.24	22.74	0.1879
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	20.94	20.44	0.1107
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	21.14	20.64	0.1159
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	20.58	20.08	0.1019
77	30	100	662000	3930	CP-OFDM QPSK	137@68	25	24.5	0.2818
77	30	100	662000	3930	CP-OFDM QPSK	1@1	25.24	24.74	0.2979
77	30	100	662000	3930	CP-OFDM QPSK	1@271	24.69	24.19	0.2624



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0031	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0033	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0061	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0039	PASS	-30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0070	PASS	-20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0028	PASS	-10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0058	PASS	0℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0058	PASS	10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0031	PASS	20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0044	PASS	30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0033	PASS	40℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0028	PASS	50℃



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	3.98	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	5.12	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CHN77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

**Occupied Bandwidth**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.5895	9.708
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.5699	9.587
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.5999	9.436
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5985	9.481
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.61	14.66
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.624	14.83
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.593	15.06
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.542	14.76
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.191	19.75
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.24	19.58
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.218	19.4
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.178	19.59
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.894	29.24
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.885	29.2
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.866	29.03
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.782	29.24
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.859	39.55
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.848	39.35
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.882	39.59
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.956	39.1
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.476	49.32
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.57	49.1
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.498	49.0
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.338	49.04
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.832	60.04
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.765	59.92
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.623	59.68
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.806	59.71
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.533	69.87
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.443	69.73
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.653	69.83
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.599	69.86
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.45	79.97
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.567	80.12
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.458	79.94
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.482	79.93
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.584	90.59
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.631	90.25
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.602	90.27




77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.406	90.39
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.4	100.6
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.62	100.6
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.334	100.5
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.423	100.6


N77(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N77(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

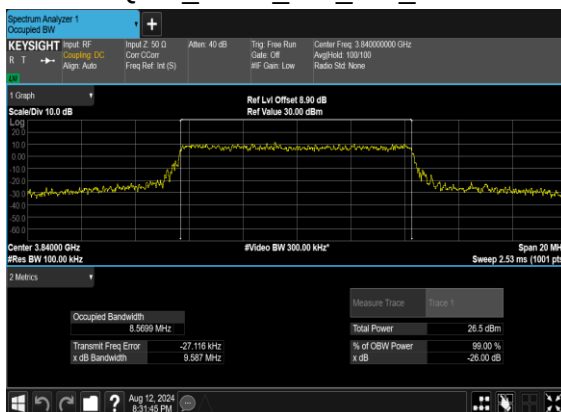

N77(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

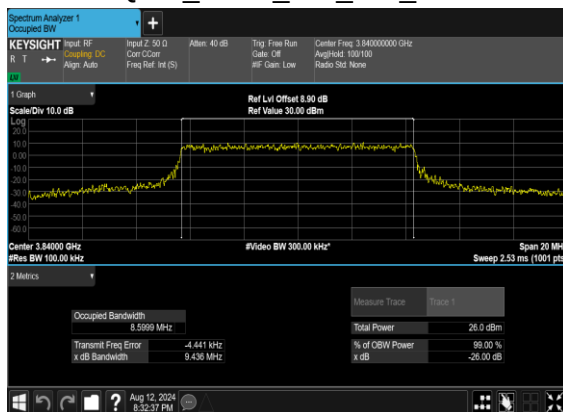


N77(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

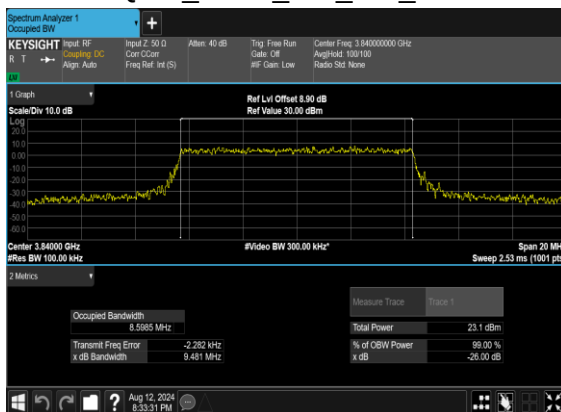





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

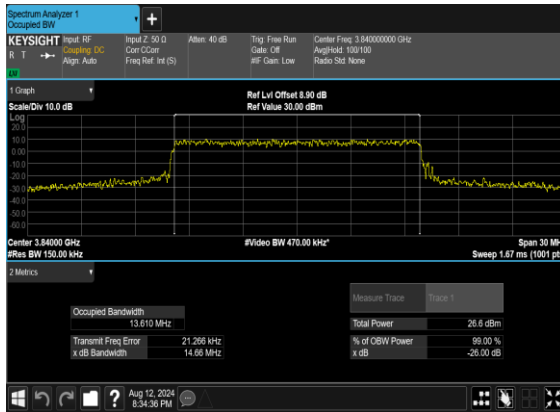


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

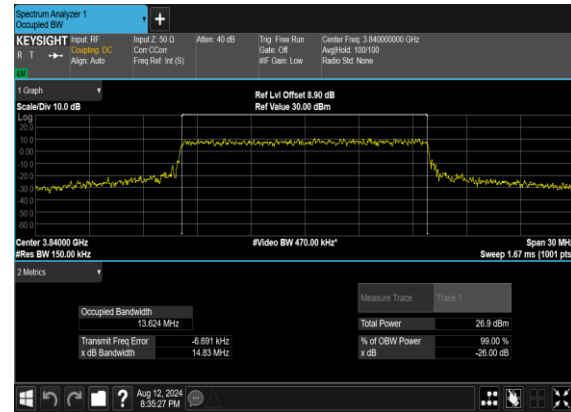

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

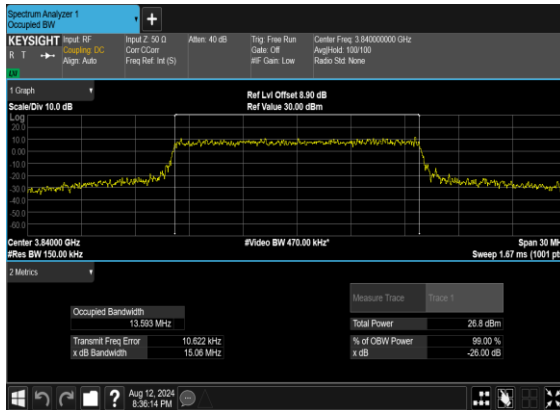


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

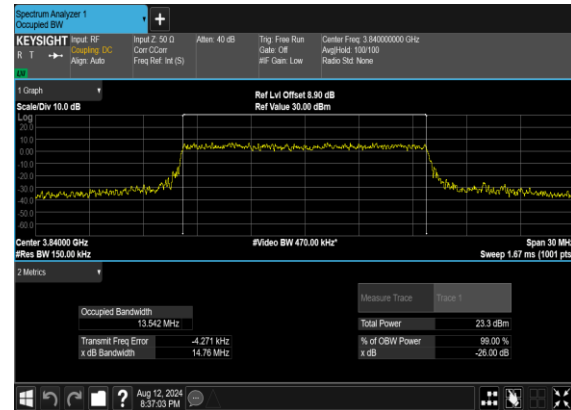





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

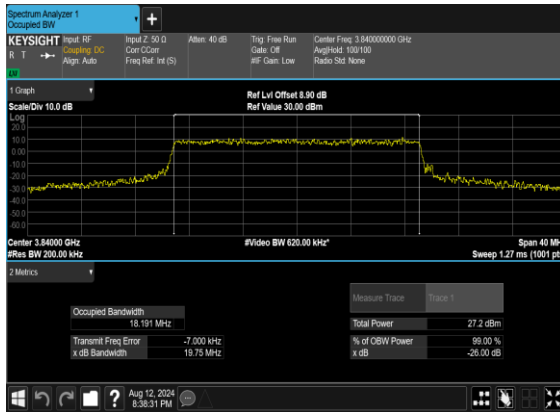


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

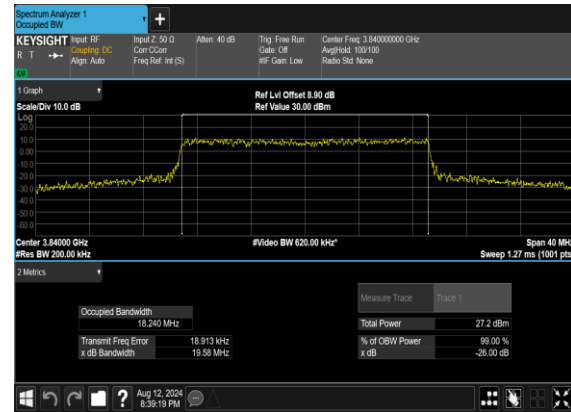

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

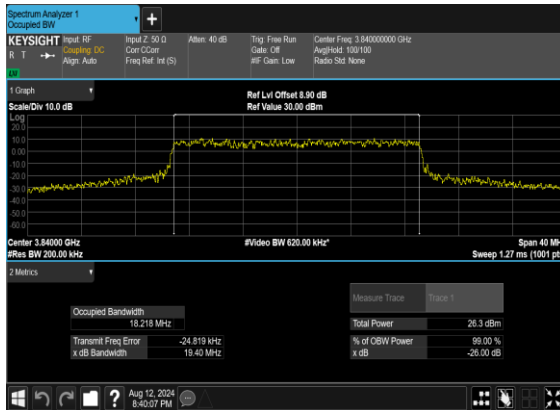


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

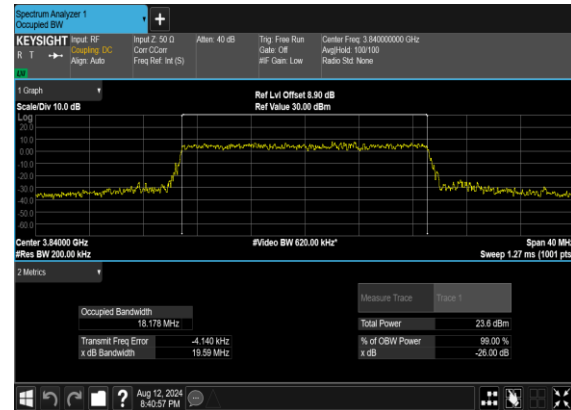





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

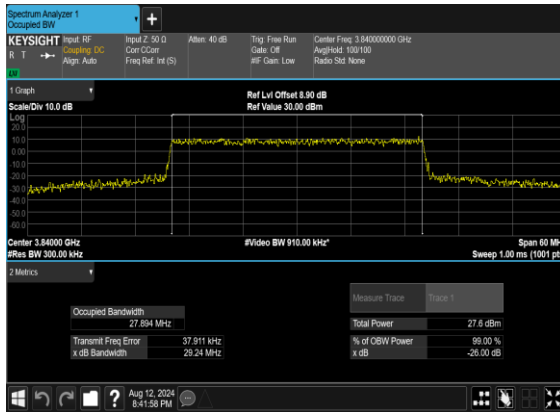


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

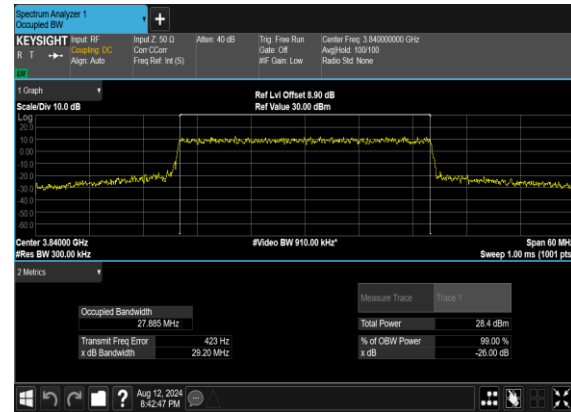

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

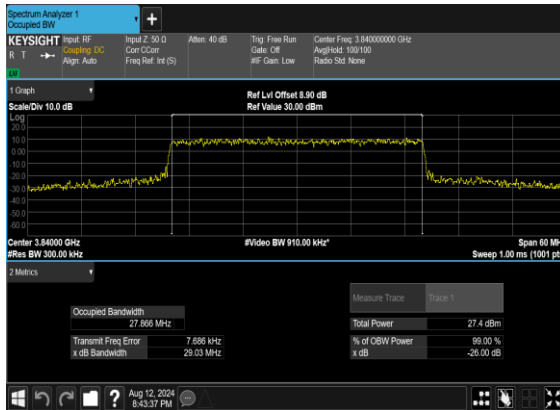


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

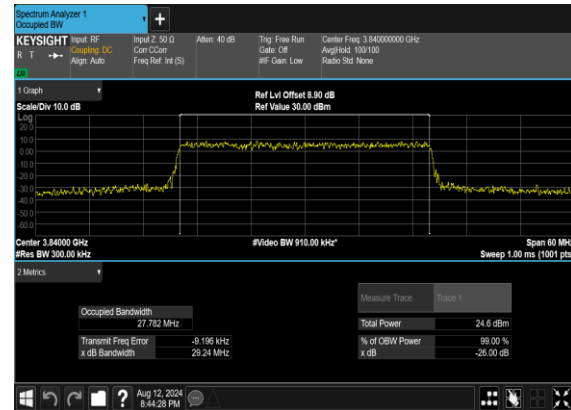





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

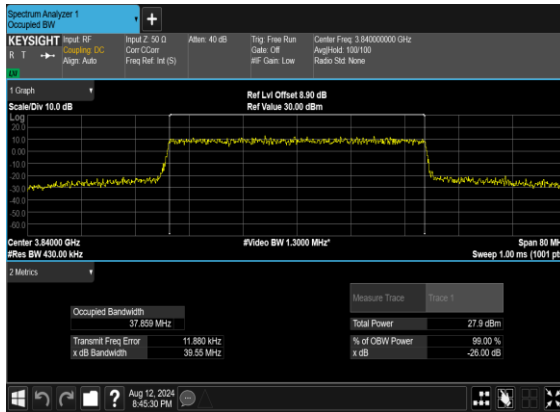


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

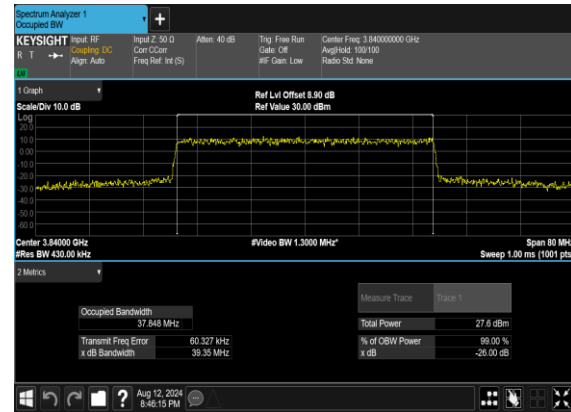

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

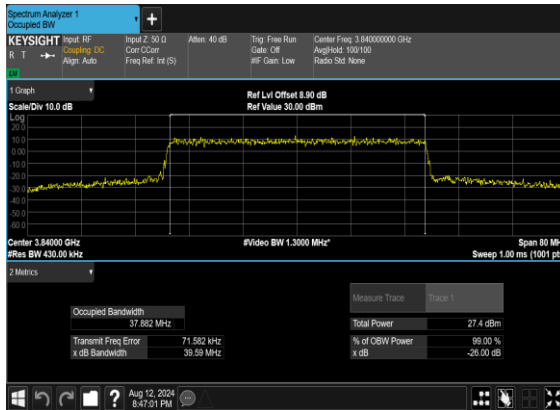


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

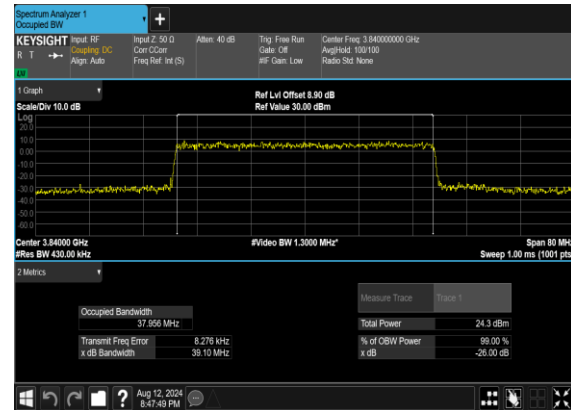





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

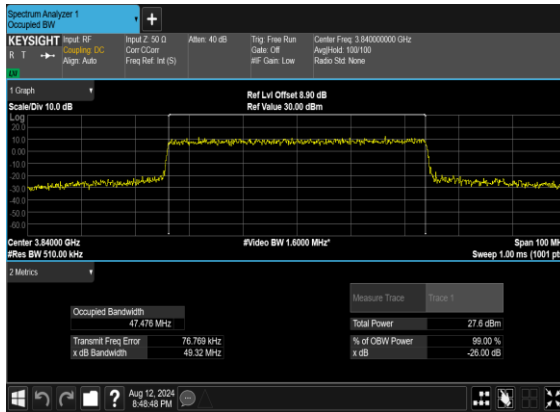


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

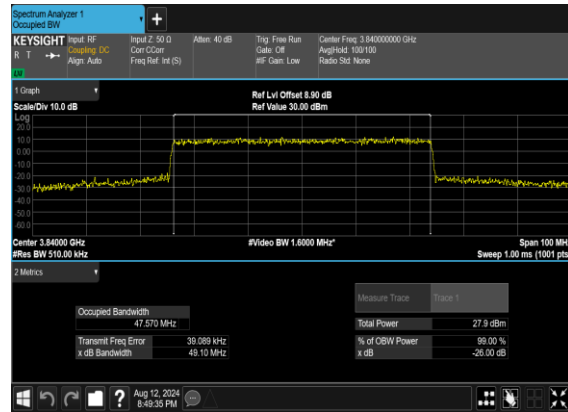

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

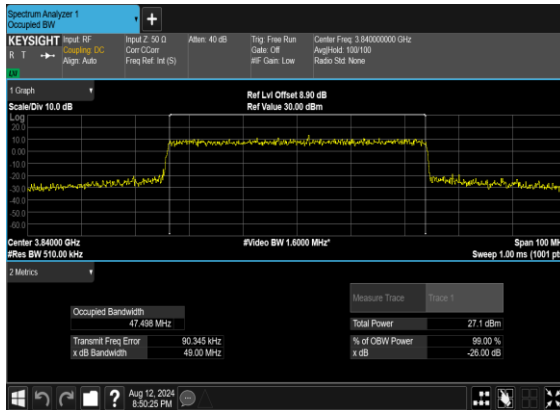


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

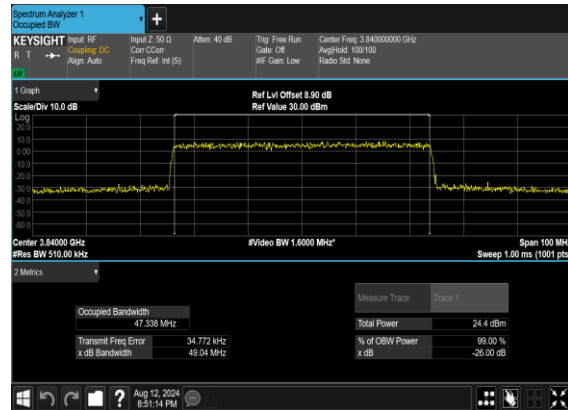





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

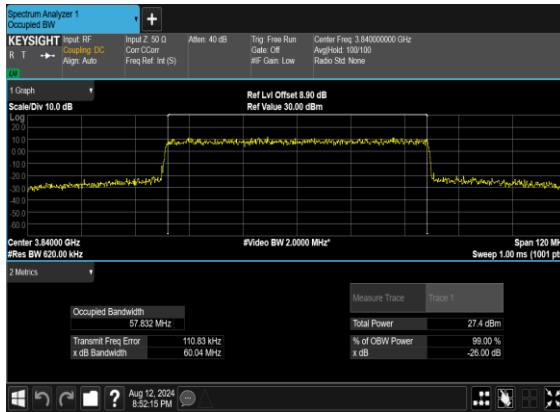


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

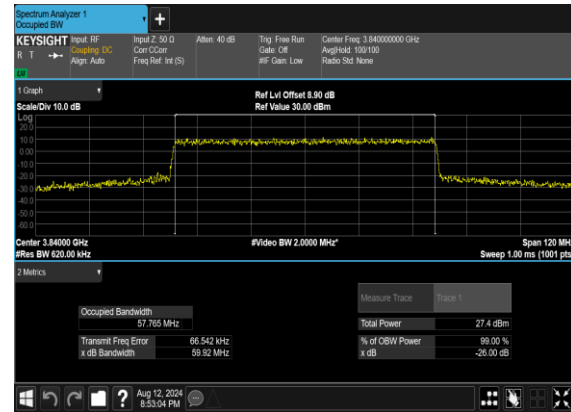

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

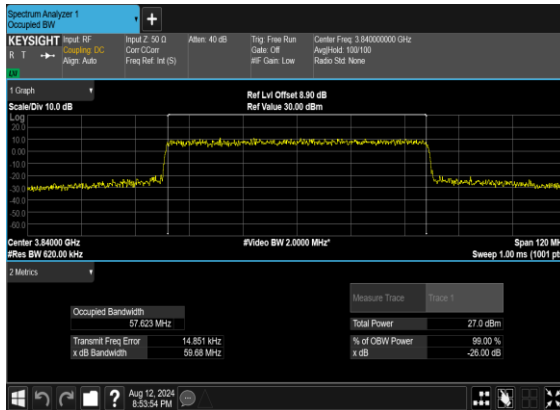


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

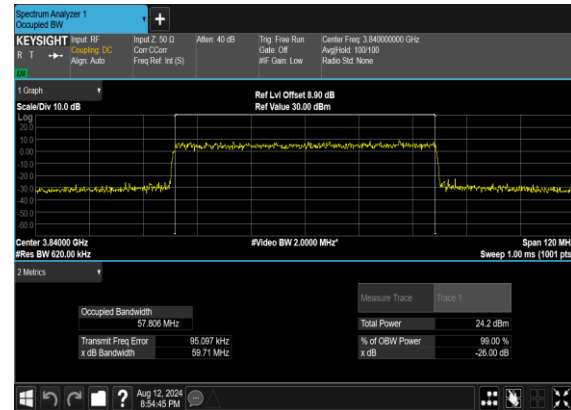





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

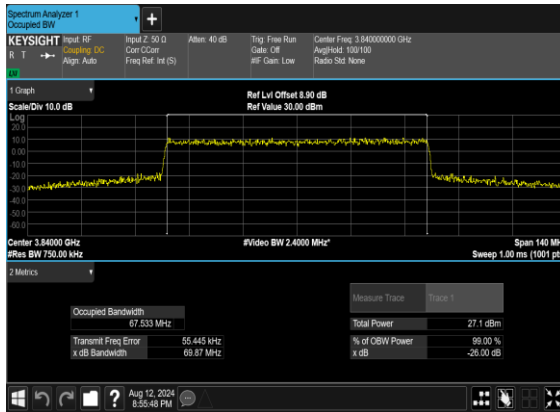


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

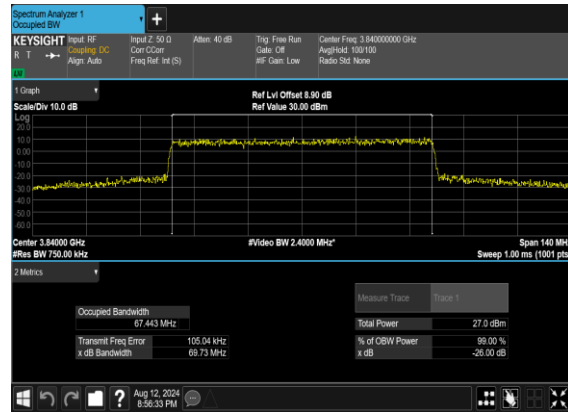

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

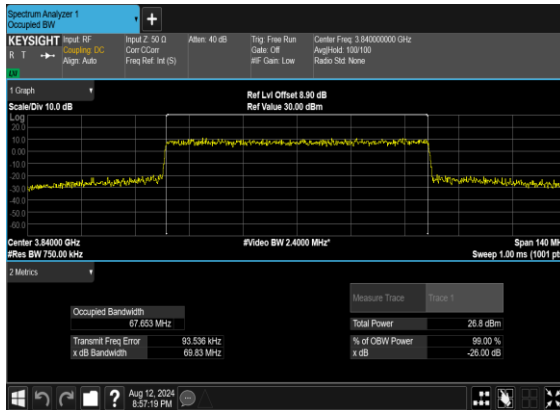


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

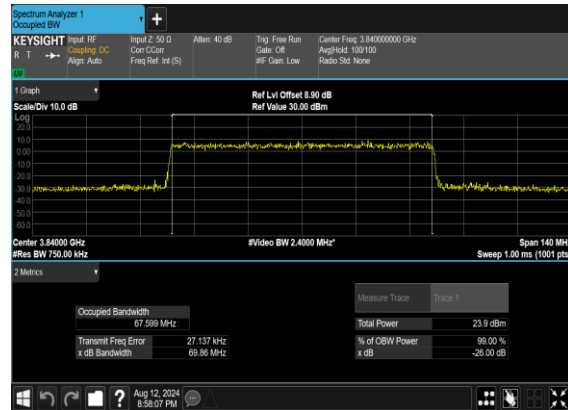





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

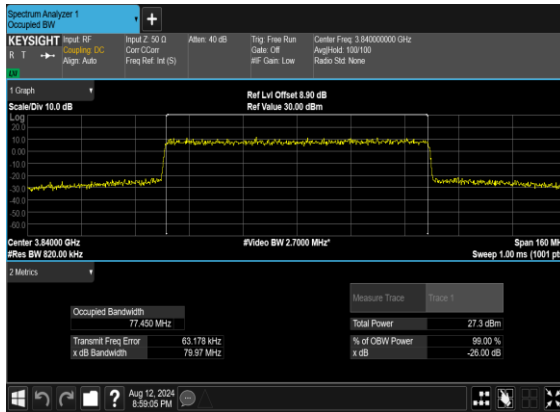


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

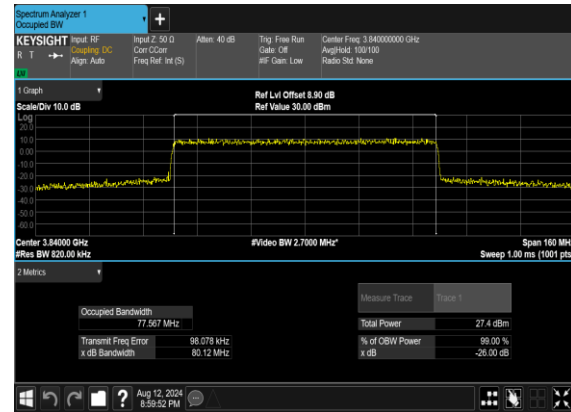

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

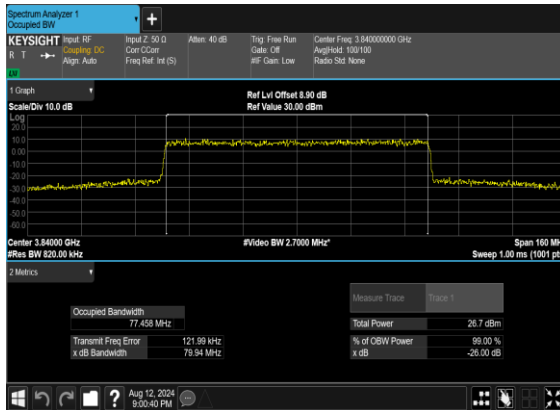


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

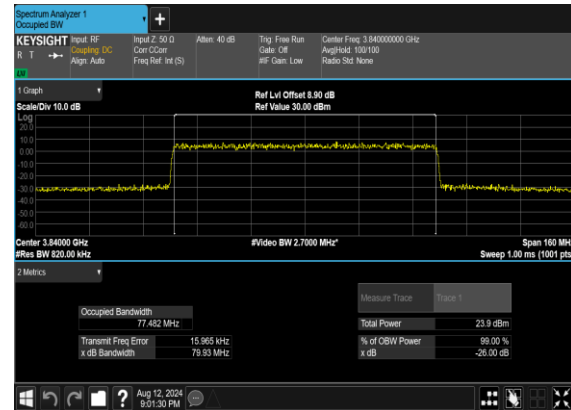





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

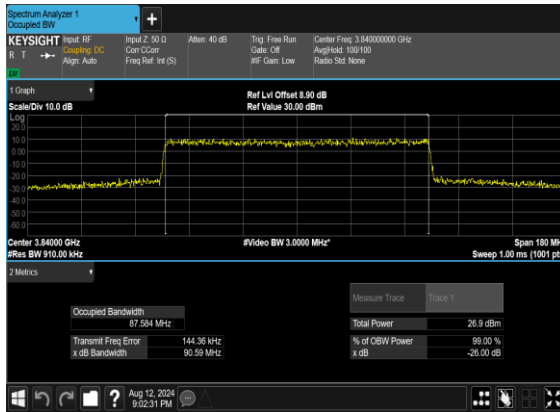


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

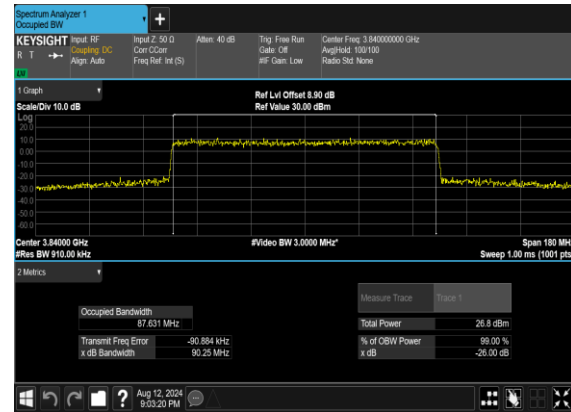

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

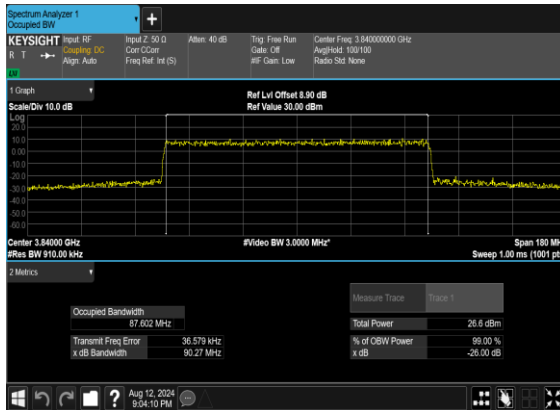


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

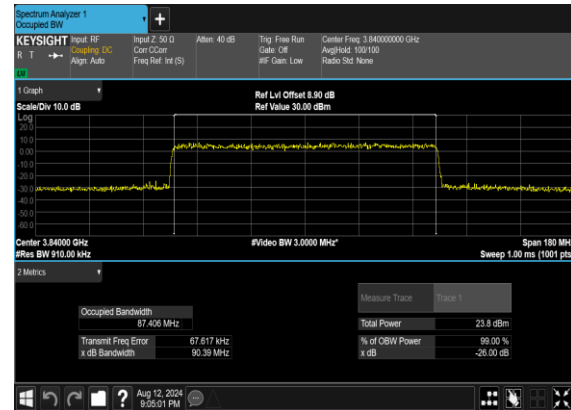





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

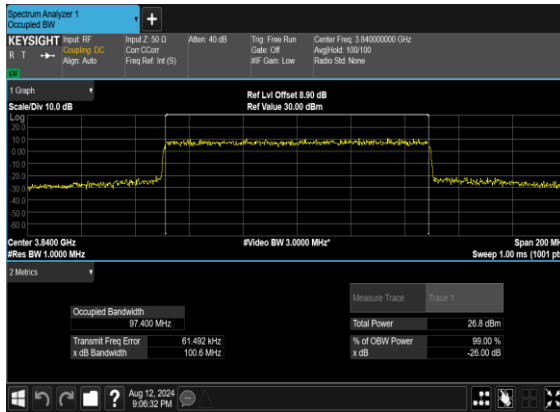


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

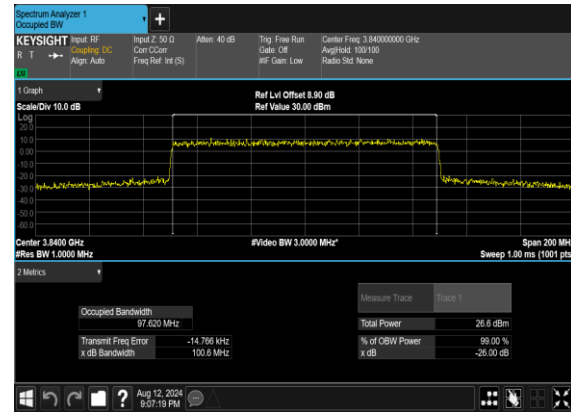

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

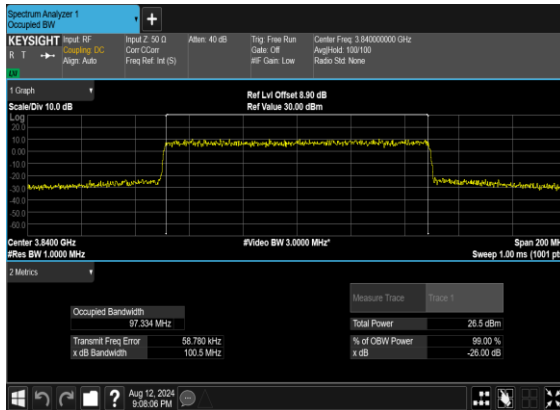

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

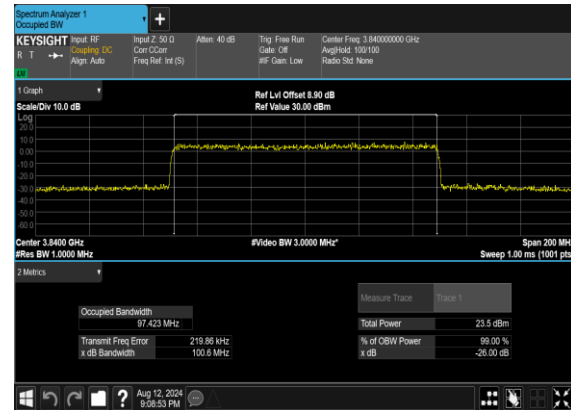

**Conducted Spurious Emissions**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

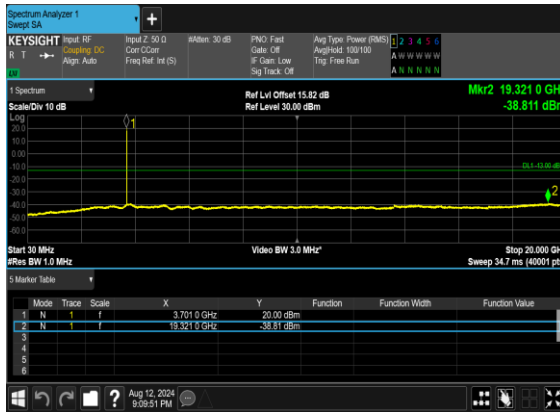


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

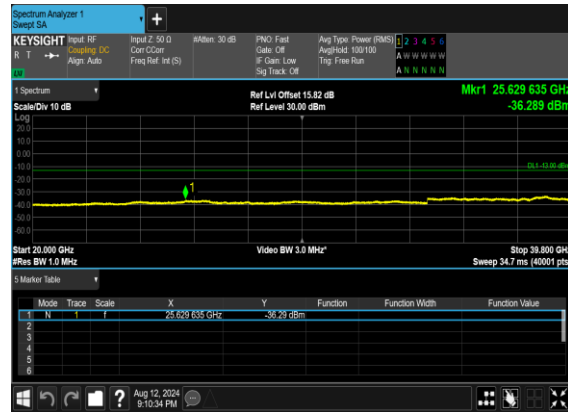

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

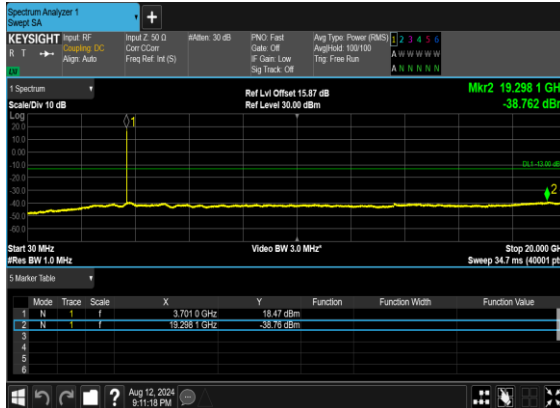


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

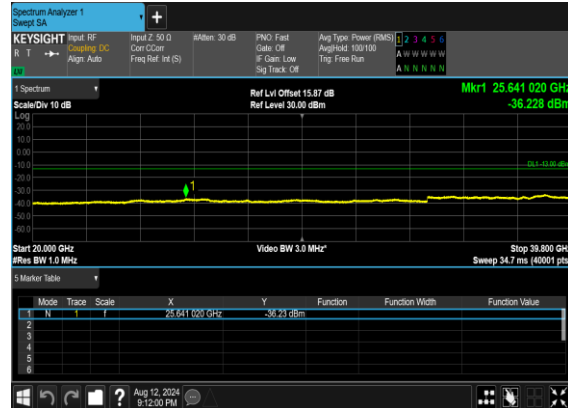





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

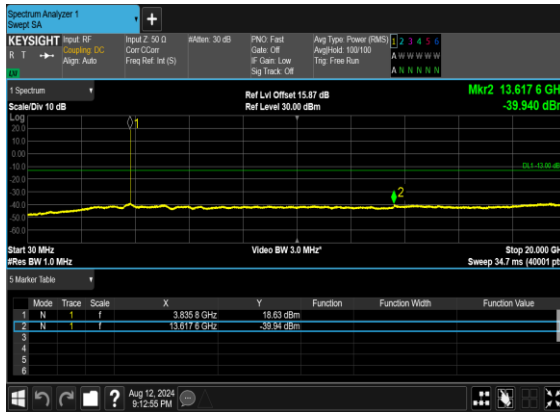


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

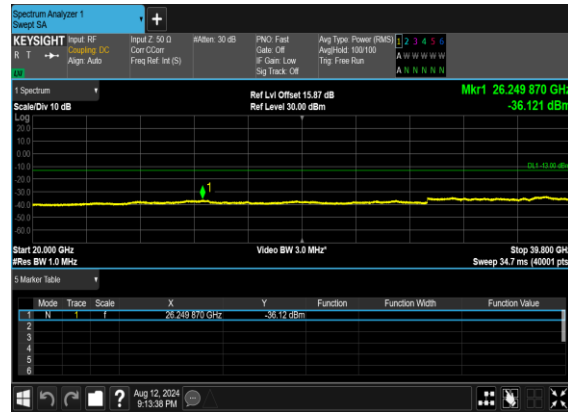

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

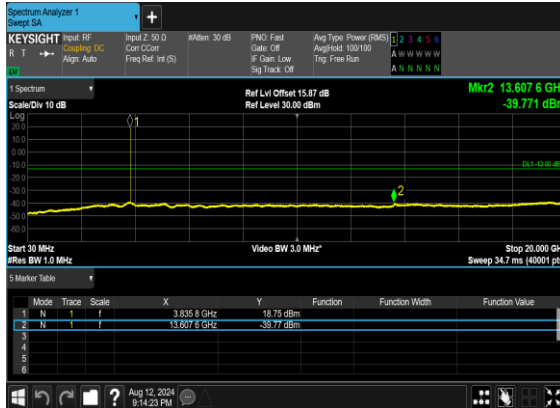


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

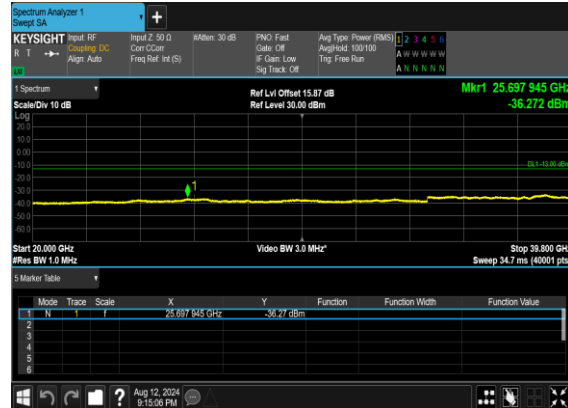





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

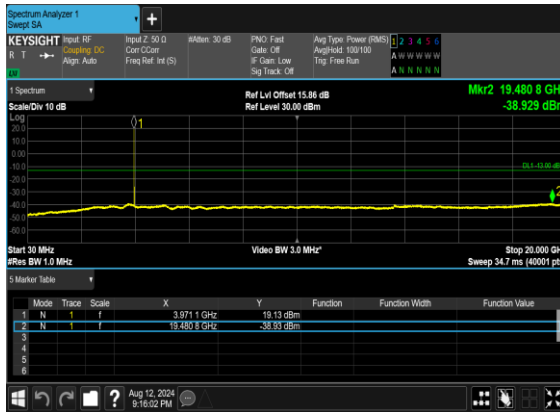


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH


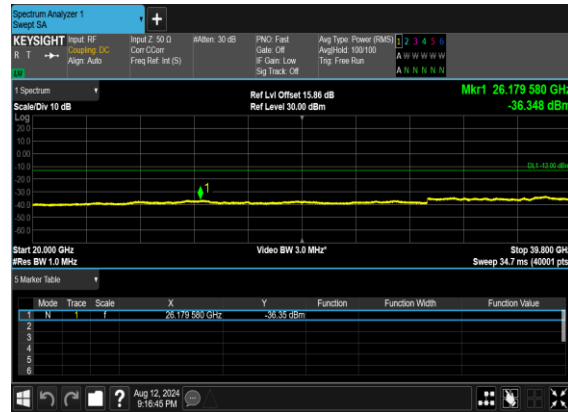


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

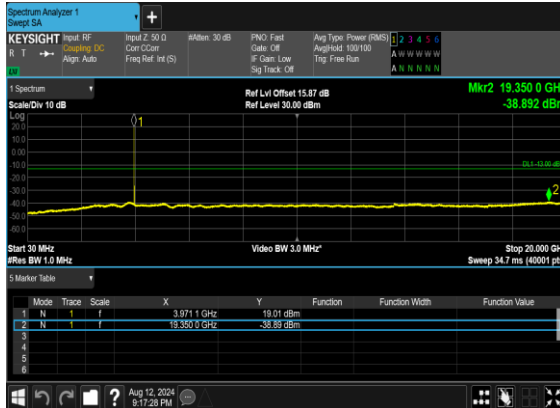

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

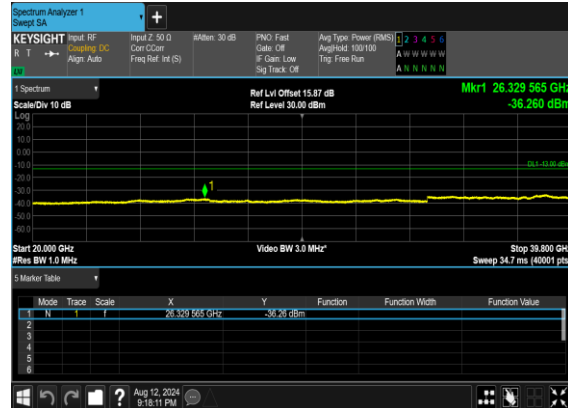

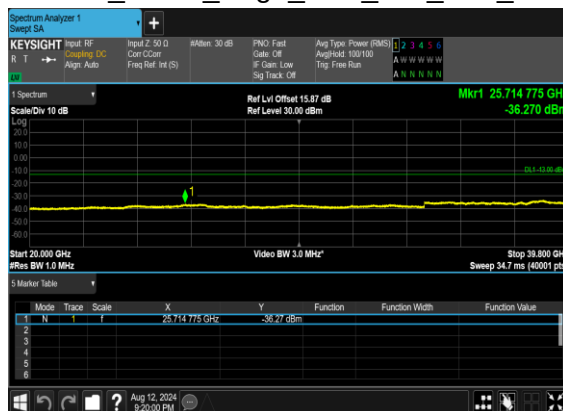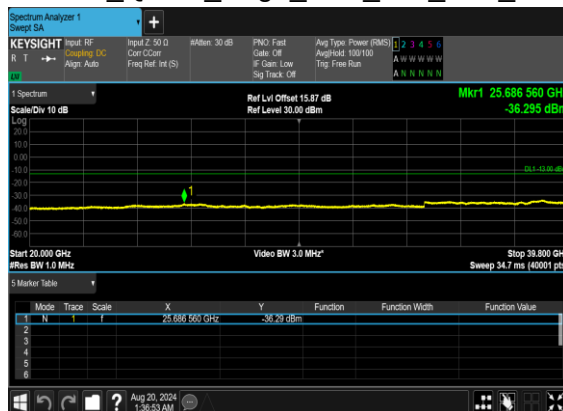
N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

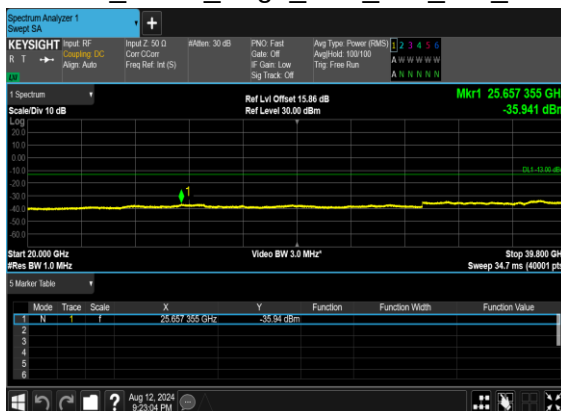

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

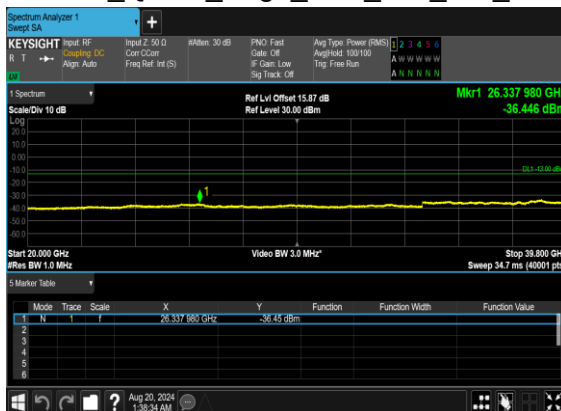




N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

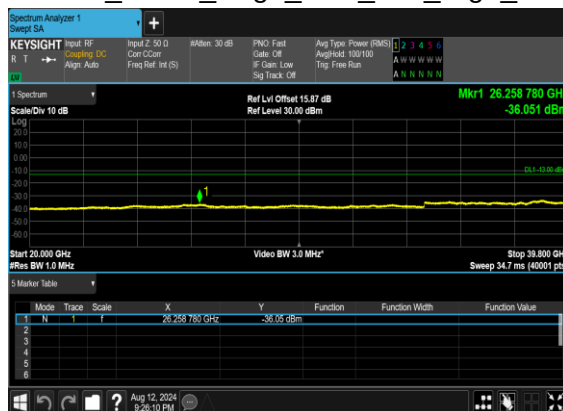

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH



N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

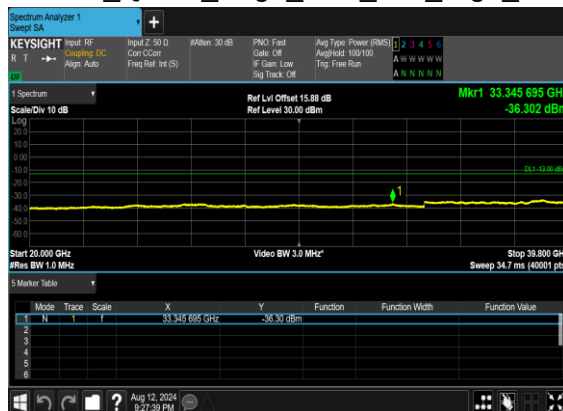




N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

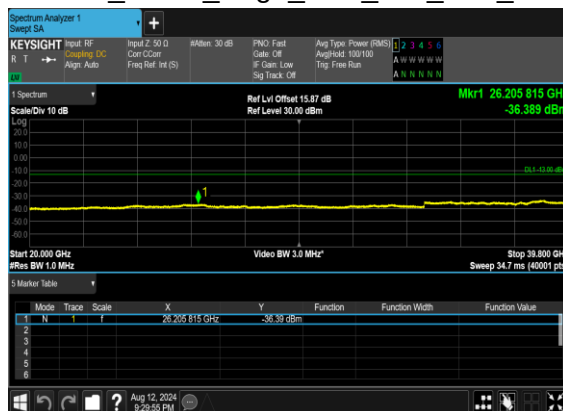

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

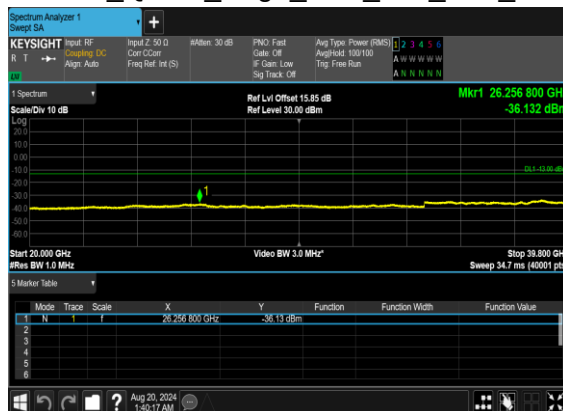




N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH






N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

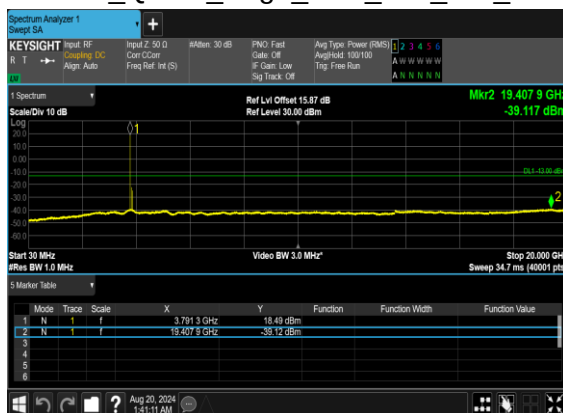

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

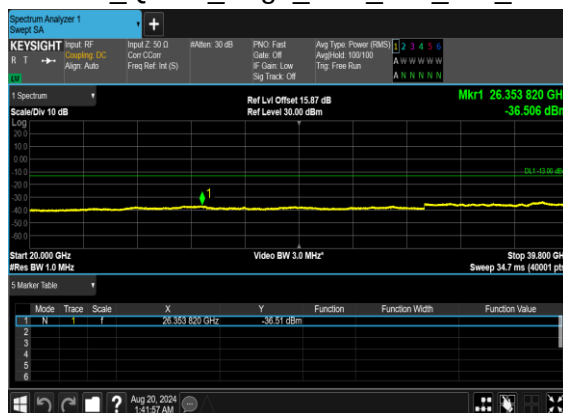

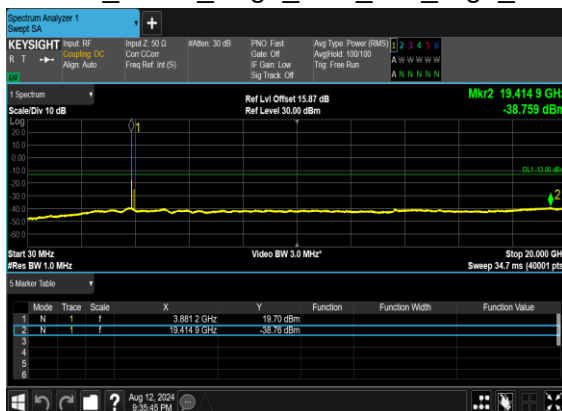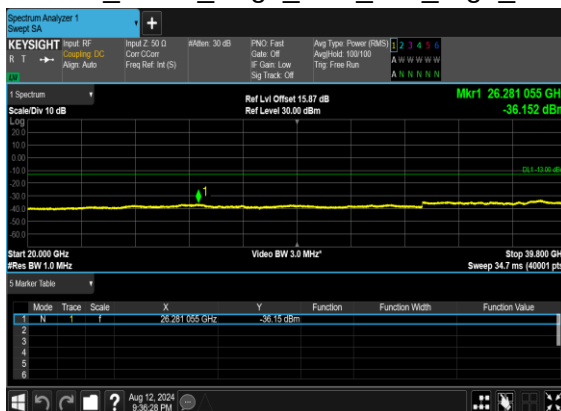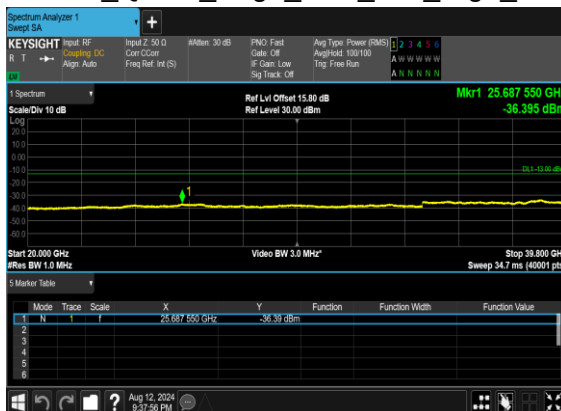
N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CHN77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CHN77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CHN77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

**Conducted Band Edge**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@23	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@23	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@132	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@132	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	270@0	see graph	PASS



N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

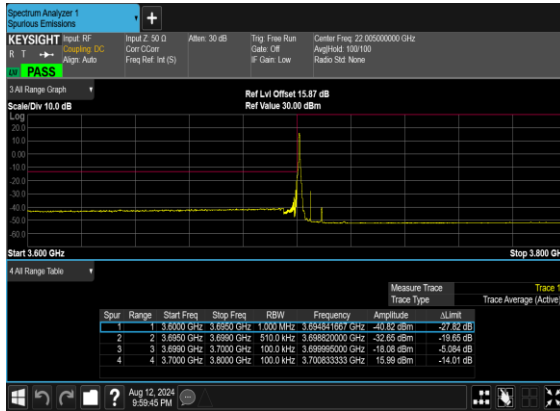

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

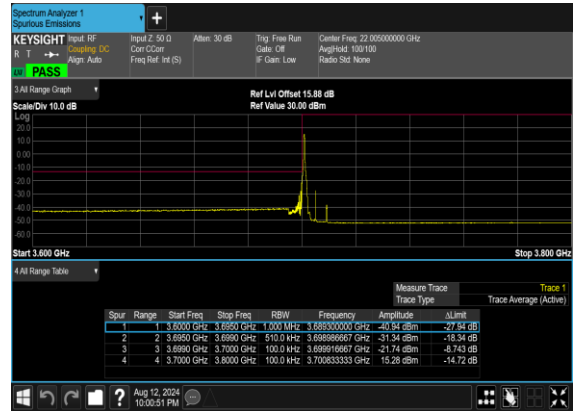

N77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH



N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

