



SUPER EL50448

2 in 1 TPMS Relearn Tool

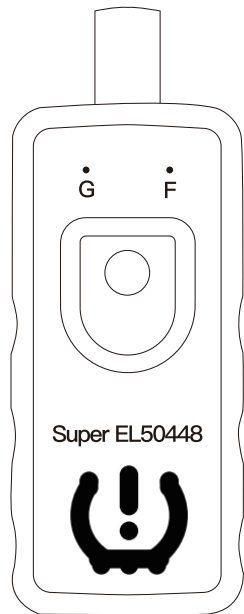

OBDResource Electronics Co., Ltd.

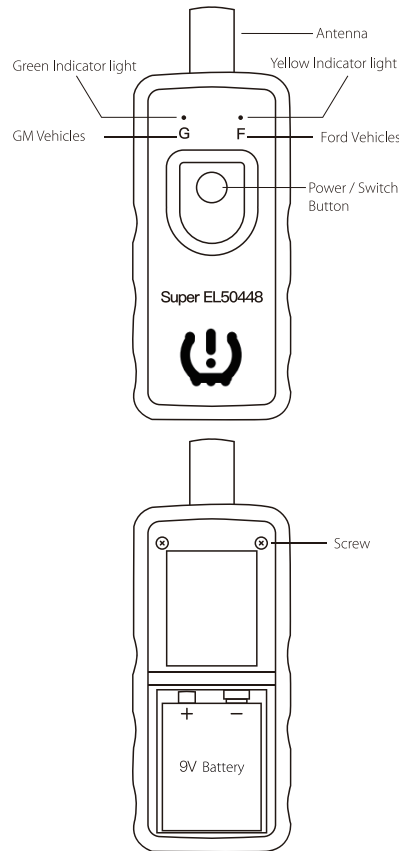

Super EL50448 TPMS relearn tool is able to work with both GM series and Ford series vehicles, it is an essential tool of replacement tire pressure sensor, tire pressure alarm remove or exchange tires for GM series(Opel/ Chevy/ Buick/ GMC/ Cadillac) Ford series (Lincoln/ Mercury), etc.

How to switch between GM and Ford brand?

Hold power button for 5 seconds and 2 LEDs flashing 2 times, then the selected brand's LED flashing 2 times.

How to detect which mode the device in?

Press power button, if Green LED flashing means it's in GM mode, if Yellow LED flashing, means it's in Ford mode.

How to use Super EL50448?

1. Require 1x Pcs 9V battery to work.
2. Set the car in TPMS learning mode(car horns twice).
3. Starting relearn process from left front tire, point antenna on correct position. Press & release power button. Once the speaker chirped, move to the next tire.
4. Follow this order to rest TPMS sensors: Front left, front right, rear right, rear left.
5. After all sensors reset, the car horns twice means TPMS re-learn finished.

How to set my car in TPMS re-learn mode?

For GM series vehicles

1. Make the gear in P position.
2. Use cruise to choose TPMS re-learn mode in the dashboard settings.
3. Horn will ring once and TPMS indicator flashes, then learning mode has been entered successfully. If equipped, the message center will display the front left (LF) tire.

For Ford series vehicles

1. Make the gear in P position.
2. Ignition switch to OFF, press and release the brake pedal.
3. Turn ignition switch from OFF position to RUN position 3 times and end at RUN position.
4. Depress and release the brake pedal.
5. Ignition to OFF position.
6. Ignition goes from OFF position to RUN position 3 times and ends at RUN position.

7. Horn will ring once and TPMS indicator flashes, then learning mode has been entered successfully. If equipped, the message center will display the front left (LF) tire.

Notice:

1. 9V battery should be in good condition: NEW and fully charged.
2. When using Super EL50448, please make sure antenna in correct position.
3. Please do tire reset outside instead of inside the garage.
4. Position of the tire is also important, Front tires have to be straight.

Correct Position:



OBDResource Electronics Co., Ltd.
Tel: +86-755-29071623
Email: info@el50448.com
Web: www.el50448.com



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
— Reorient or relocate the receiving antenna.
— Increase the separation between the equipment and receiver.
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
— Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

Ver19.5