

FCC RF Test Report

APPLICANT : Honeywell International Inc
EQUIPMENT : Mobile computer/Smart phone
BRAND NAME : Honeywell
MODEL NAME : CT47X1N
FCC ID : HD5-CT47X1N
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Nov. 14, 2022 ~ Dec. 15, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	7
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power	12
3.3 EIRP and PSD.....	13
3.4 Occupied Bandwidth	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability.....	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation.....	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG2729130	01	Initial issue of report	Dec. 28, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.3	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 15.87 dB at 10818.00 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Honeywell International Inc

9680 Old Bailes Rd, Fort Mill, SC 29707 United States

1.2 Manufacturer

Honeywell International Inc

9680 Old Bailes Rd, Fort Mill, SC 29707 United States

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile computer/Smart phone
Brand Name	Honeywell
Model Name	CT47X1N
FCC ID	HD5-CT47X1N
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Bandwidth	10MHz / 20MHz / 40MHz
SCS	30kHz
Antenna Gain	<Ant. 2/3/7/8>: -3 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted : 990019560036412/990019560036420 990019560049753/990019560049761 Radiation : 990019560031876/990019560031884
HW Version	V1.0
SW Version	OS.21.001-HON.21.001
EUT Stage	Identical Prototype

Remark:

1. The device supports n48(1T4R) SRS resources on Ant.2/3/7/8, only the worst test data of Antenna 8 is showed in the report
2. 5G NR n48 supports SA mode only.
3. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP are shown in the report, 5G NR n48 for Ant. 8.
4. 5G NR n48 support UL MIMO mode for Ant(7+8)/ Ant(8+2)/ Ant(8+3)/ Ant(2+7)/ Ant(2+3)/ Ant(7+3), only the worst test data of Ant(7+8) is shown in the report.
5. 5G NR n48 UL_MIMO mode only supports CP-OFDM Modulation, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
6. For n48 MIMO mode, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{ANT})$ according to KDB 662911 D01.

1.4 Maximum EIRP Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.0710	8M61G7D	0.0586	8M62W7D
20	3560.01~3690.00	0.0745	18M2G7D	0.0624	18M2W7D
40	3570.00~3679.98	0.0764	37M9G7D	0.0638	37M8W7D

5G NR n48 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.0650	8M59G7D	0.0570	8M61W7D
20	3560.01~3690.00	0.0643	18M2G7D	0.0552	18M2W7D
40	3570.00~3679.98	0.0659	37M8G7D	0.0586	37M9W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)												Modulation					RB #		Test Channel					
		10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H			
Max. Output Power	n48	v		v	-	-	v			-				v	v	v	v	v	v	v	v	v	v			
26dB and 99% Bandwidth	n48	v		v	-	-	v			-				v	v	v	v	v		v		v				
Adjacent Channel Leakage Ratio	n48	v		v	-	-	v			-				v	v				v	v	v	v	v			
Conducted Band Edge	n48	v		v	-	-	v			-				v	v				v	v	v	v	v			
Conducted Spurious Emission	n48	v		v	-	-	v			-				v	v				v	v	v	v	v			
E.I.R.P	n48	v		v	-	-	v			-				v	v	v	v	v	v	v	v	v	v			
Frequency Stability	n48			v	-	-				-					v					v		v				
Radiated Spurious Emission	n48	Worst Case																						v	v	v
Remark	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All the radiated test cases were performed with Adapter 1 and USB Cable 1. 5. Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.50V. ; High Voltage =4.45V																									

2.2 Connection Diagram of Test System

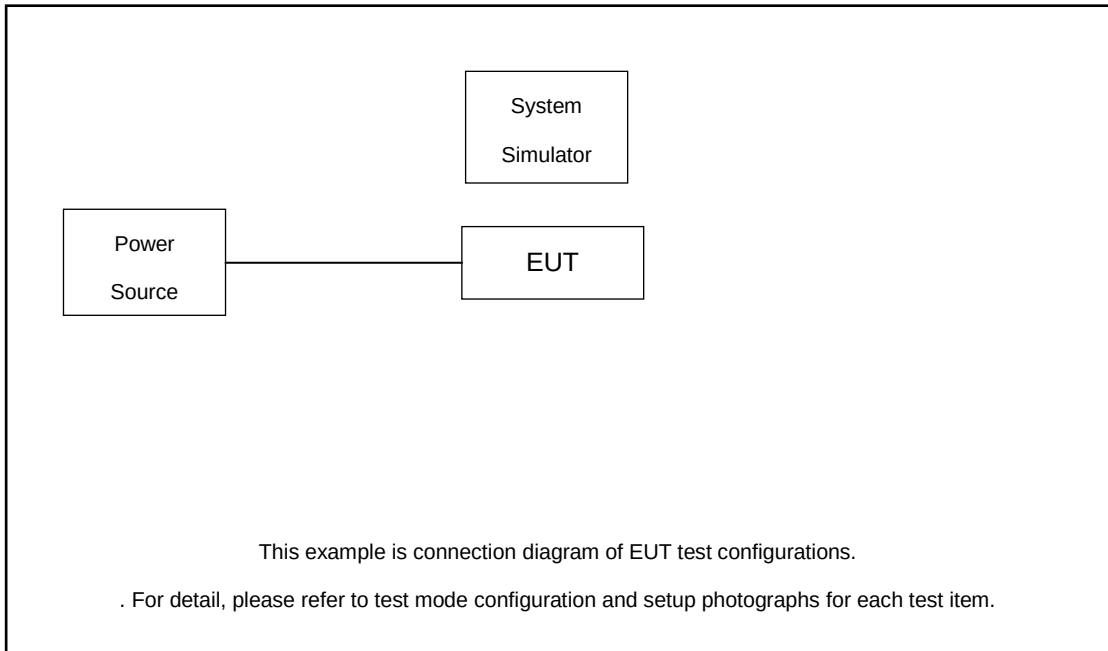

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.67dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.67 + 10 = 15.67 \text{ (dB)}
 \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
10	Channel	637000	641666	646332
	Frequency	3555.0	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

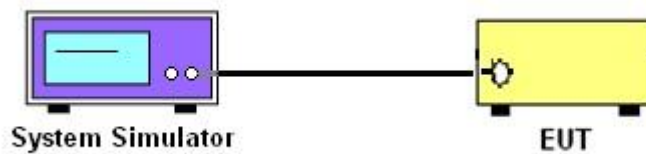

3.1.3 PSD, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

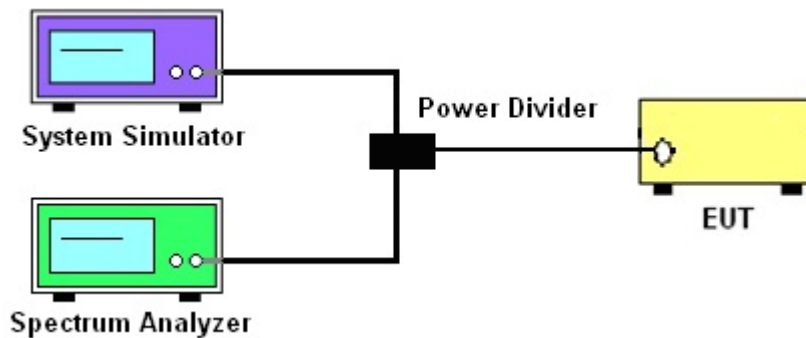

3.1.4 Frequency Stability

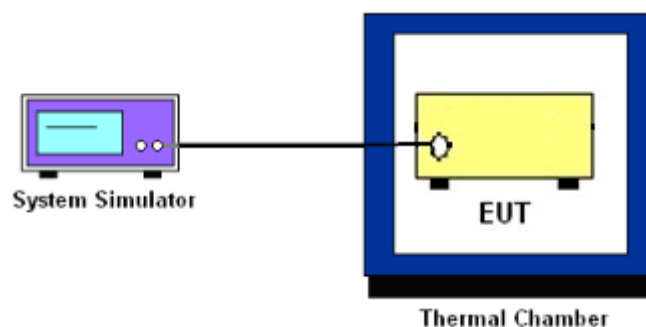

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP and PSD

3.3.1 Description of the EIRP Measurement

EIRP and PSD limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark:

1. The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.3.3 Test Procedures for EIRP PSD

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 2 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).
10. Determine the EIRP by adding the effective antenna gain to the adjusted power level.
11. Add 10 log (1/duty cycle) to the measured power level to compute the average power during continuous transmission.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

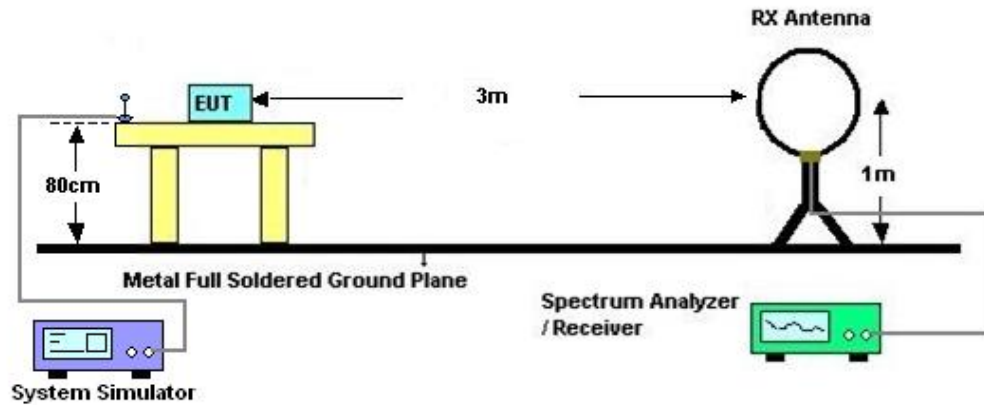

4.2.2 For radiated test from 30MHz to 1GHz

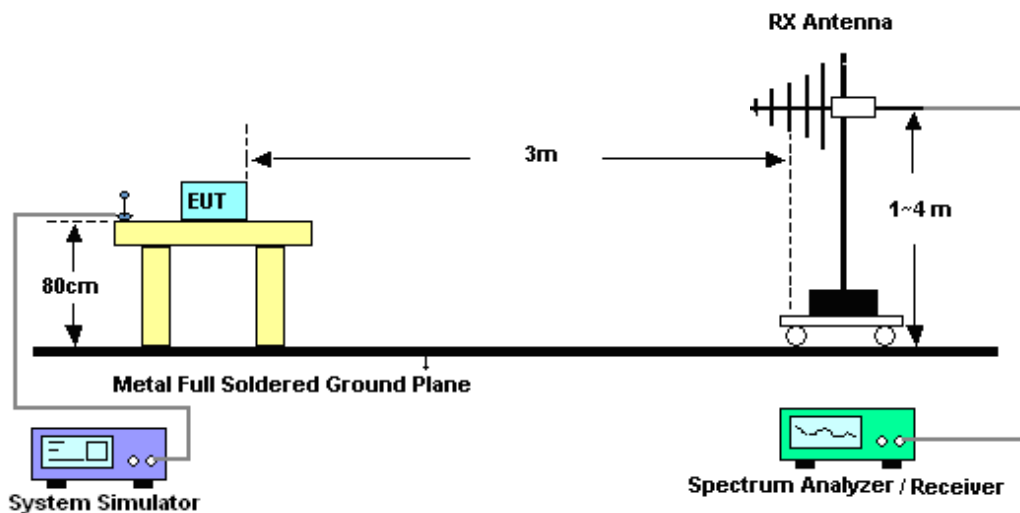

4.2.3 For radiated test above 1GHz

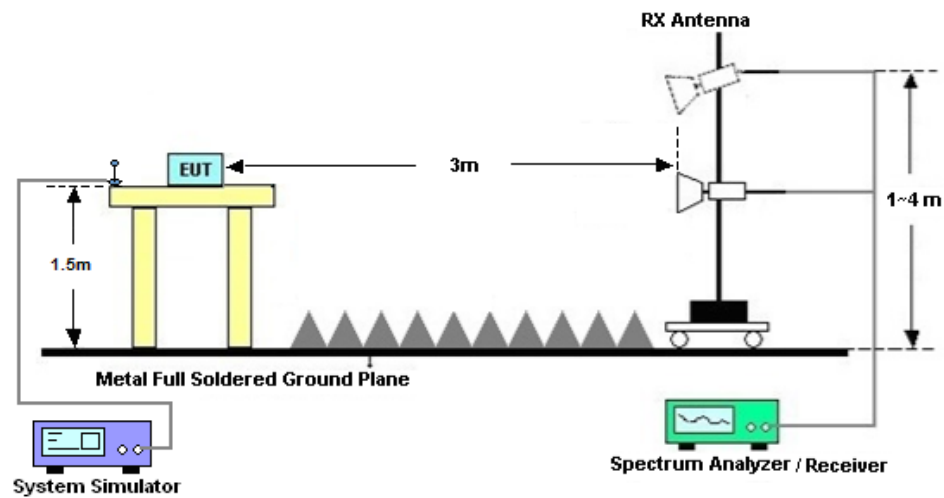

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Nov. 25, 2022~Dec. 15, 2022	Apr. 08, 2023	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 17, 2022	Nov. 25, 2022~Dec. 15, 2022	Oct. 16, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Nov. 25, 2022~Dec. 15, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Nov. 25, 2022~Dec. 15, 2022	Jul. 06, 2023	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Nov. 14, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 29, 2022	Nov. 14, 2022	Oct. 28, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Nov. 14, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Nov. 14, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Nov. 14, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Nov. 14, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Nov. 14, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Nov. 14, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Nov. 14, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 14, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 14, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 14, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB
Conducted Emissions	± 1.34 dB
Occupied Channel Bandwidth	± 0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.3dB
--	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.8dB
--	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N48(ANT8)

Transmitter Conducted Output Power And ERP/EIRP, ($G_T - L_C$)=-3.0dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@1	20.75	17.75	0.0596
48	30	10	637000	3555.0	DFT-s-OFDM 16 QAM	1@1	19.95	16.95	0.0495
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	20.67	17.67	0.0585
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	19.73	16.73	0.0471
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	21.51	18.51	0.0710
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	20.68	17.68	0.0586
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	21.72	18.72	0.0745
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	20.95	17.95	0.0624
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	21.64	18.64	0.0731
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	20.85	17.85	0.0610
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@1	21.33	18.33	0.0681
48	30	20	646000	3690.0	DFT-s-OFDM 16 QAM	1@1	20.79	17.79	0.0601
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	21.8	18.8	0.0759
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	21.79	18.79	0.0757
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	21.75	18.75	0.0750
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	21.83	18.83	0.0764
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	21.78	18.78	0.0755
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	21.71	18.71	0.0743
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	50@25	20.81	17.81	0.0604

48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	21.05	18.05	0.0638
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@104	20.96	17.96	0.0625
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	50@25	19.32	16.32	0.0429
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	19.11	16.11	0.0408
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@104	19.1	16.1	0.0407
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	50@25	17.23	14.23	0.0265
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	17.19	14.19	0.0262
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@104	17.1	14.1	0.0257
48	30	40	638000	3570	CP-OFDM QPSK	53@26	20.31	17.31	0.0538
48	30	40	638000	3570	CP-OFDM QPSK	1@1	20.29	17.29	0.0536
48	30	40	638000	3570	CP-OFDM QPSK	1@104	20.27	17.27	0.0533
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	21.67	18.67	0.0736
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	21.77	18.77	0.0753
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	21.7	18.7	0.0741
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	21.67	18.67	0.0736
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	21.74	18.74	0.0748
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	21.71	18.71	0.0743
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	50@25	20.66	17.66	0.0583
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	20.99	17.99	0.0630
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@104	20.92	17.92	0.0619
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	50@25	19.2	16.2	0.0417
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	19.08	16.08	0.0406
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@104	19.03	16.03	0.0401
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	50@25	17.09	14.09	0.0256

48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	17.12	14.12	0.0258
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@104	17.03	14.03	0.0253
48	30	40	641666	3624.99	CP-OFDM QPSK	53@26	20.15	17.15	0.0519
48	30	40	641666	3624.99	CP-OFDM QPSK	1@1	20.22	17.22	0.0527
48	30	40	641666	3624.99	CP-OFDM QPSK	1@104	20.17	17.17	0.0521
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	21.53	18.53	0.0713
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	21.7	18.7	0.0741
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	21.48	18.48	0.0705
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	21.55	18.55	0.0716
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	21.64	18.64	0.0731
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	21.46	18.46	0.0701
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	50@25	20.56	17.56	0.0570
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	20.88	17.88	0.0614
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@104	20.74	17.74	0.0594
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	50@25	19.08	16.08	0.0406
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	19.01	16.01	0.0399
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@104	18.86	15.86	0.0385
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	50@25	16.94	13.94	0.0248
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	17	14	0.0251
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@104	16.83	13.83	0.0242
48	30	40	645332	3679.98	CP-OFDM QPSK	53@26	20.04	17.04	0.0506
48	30	40	645332	3679.98	CP-OFDM QPSK	1@1	20.12	17.12	0.0515
48	30	40	645332	3679.98	CP-OFDM QPSK	1@104	20	17	0.0501


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0050	PASS	NV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0027	PASS	LV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0047	PASS	HV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0037	PASS	-30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0050	PASS	-20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0065	PASS	-10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0065	PASS	0°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0054	PASS	10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0050	PASS	20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0032	PASS	30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0024	PASS	40°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0021	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	24@0	8.6102	9.568
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	8.6069	9.52
48	30	10	641666	3624.99	CP-OFDM QPSK	24@0	8.5746	9.521
48	30	10	641666	3624.99	CP-OFDM 16 QAM	24@0	8.5913	9.455
48	30	10	641666	3624.99	CP-OFDM 64 QAM	24@0	8.6167	9.535
48	30	10	641666	3624.99	CP-OFDM 256 QAM	24@0	8.5592	9.284
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	17.794	18.87
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	17.813	18.98
48	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.219	19.46
48	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.194	19.5
48	30	20	641666	3624.99	CP-OFDM 64 QAM	51@0	18.249	19.4
48	30	20	641666	3624.99	CP-OFDM 256 QAM	51@0	18.214	19.59
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	35.754	37.2
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	35.742	37.17
48	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.909	39.54
48	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.822	39.42
48	30	40	641666	3624.99	CP-OFDM 64 QAM	106@0	37.833	39.33
48	30	40	641666	3624.99	CP-OFDM 256 QAM	106@0	37.833	39.35


N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

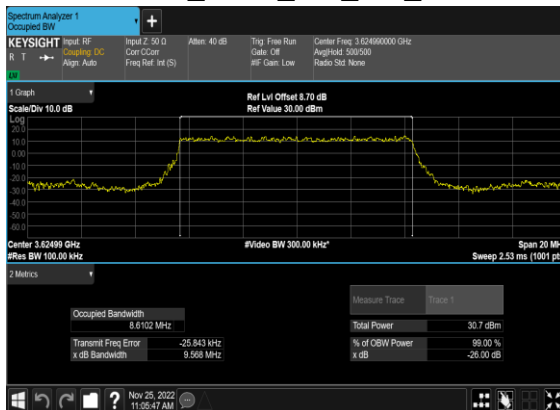

N48(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

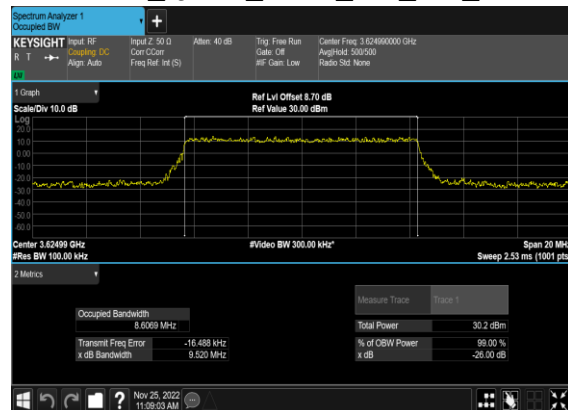


N48(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

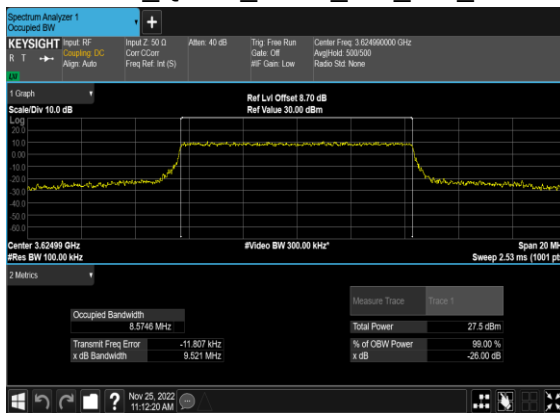


N48(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH




N48(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

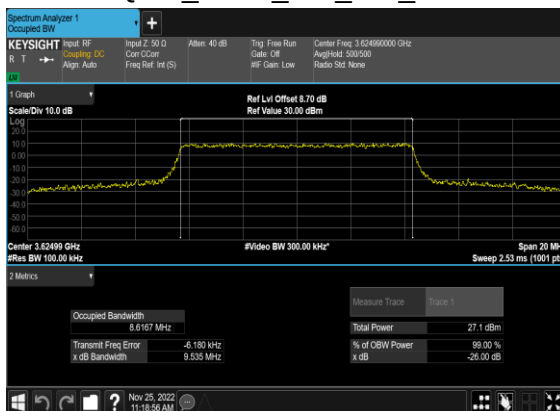


N48(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

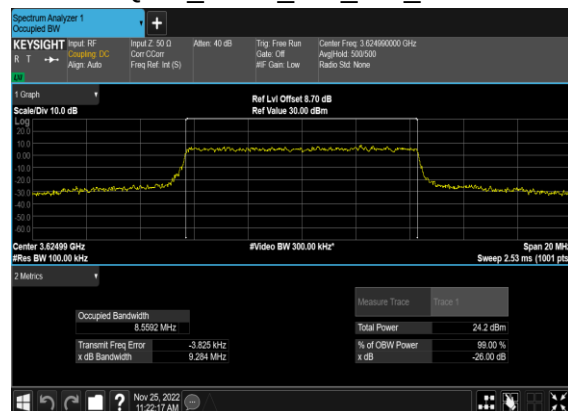


N48(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

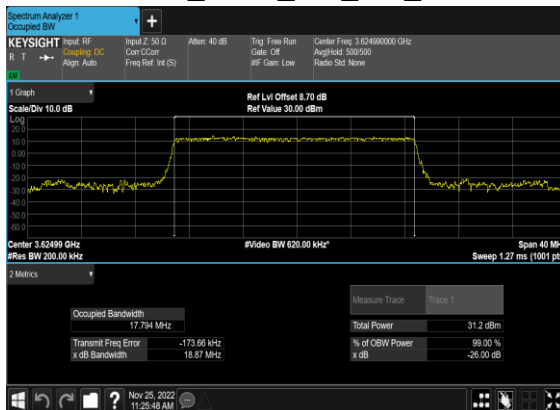


N48(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

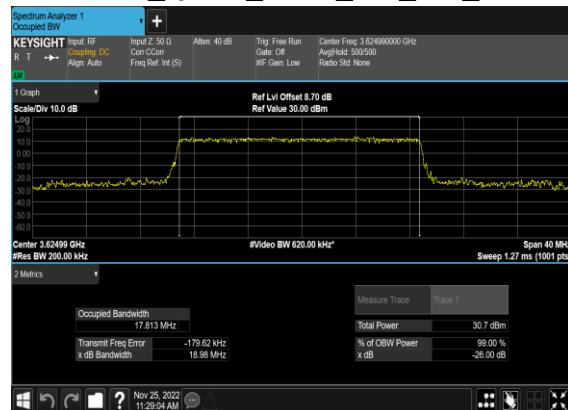


N48(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

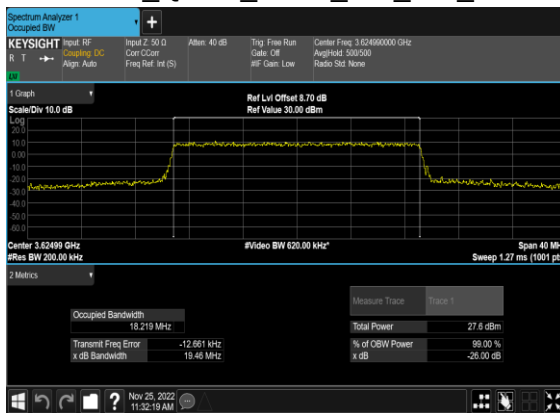


N48(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

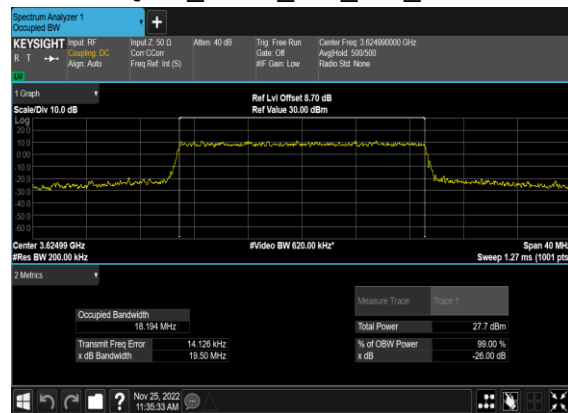


N48(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

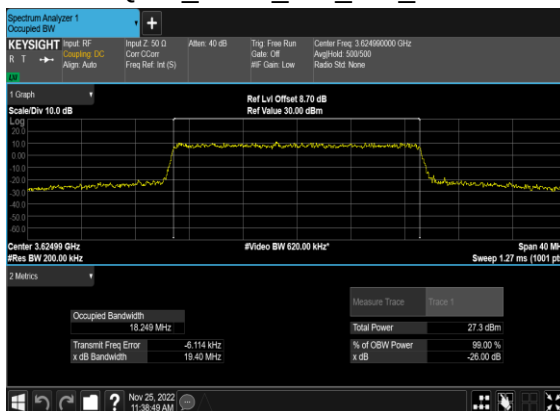


N48(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

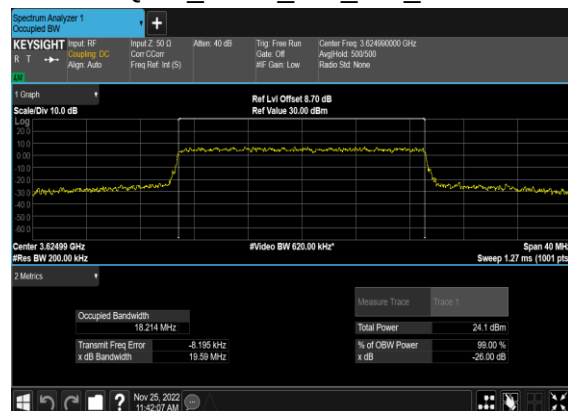


N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

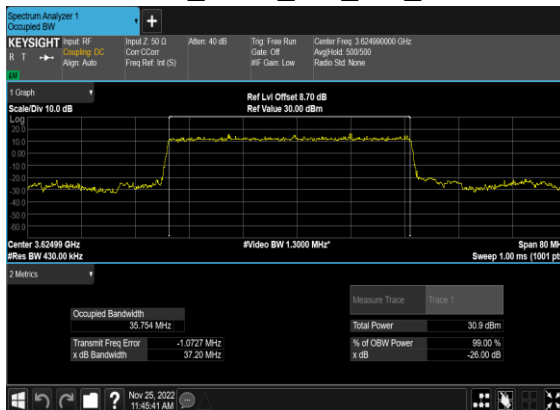


N48(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

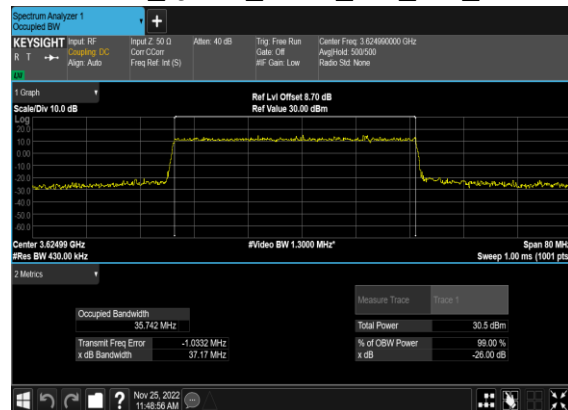


N48(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

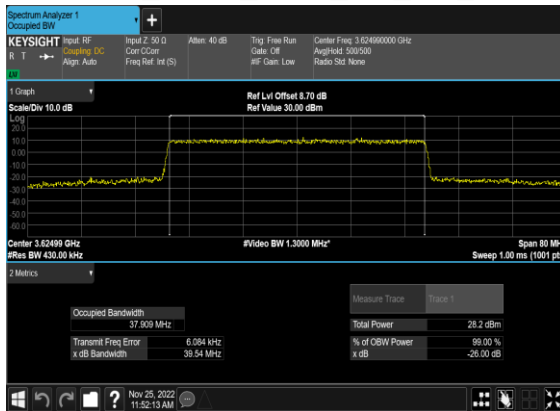


N48(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

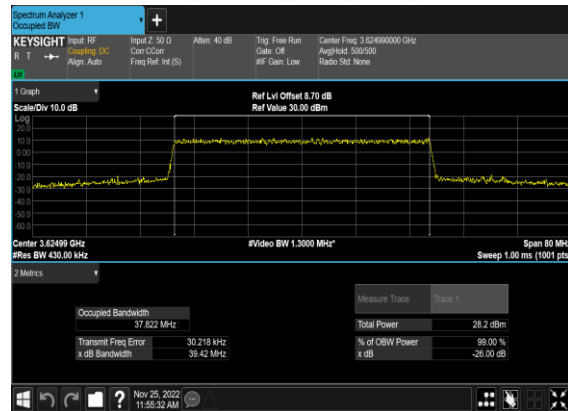

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

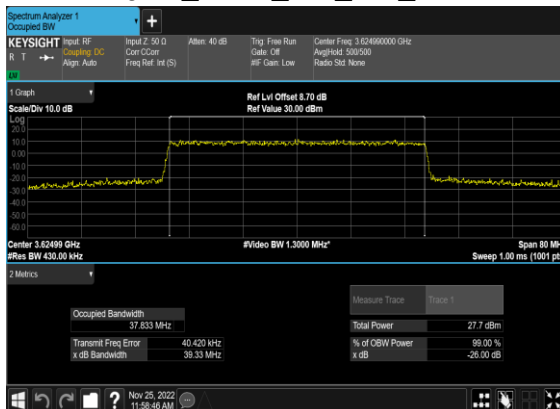

N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

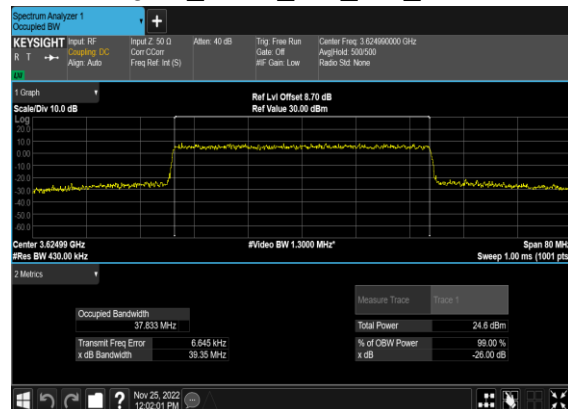


Adjacent Channel Leakage Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	24@0	-17.39	-17.23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.96	-25.66	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@23	-25.3	-13.68	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	-15.04	-15.58	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	-10.86	-24.84	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	-24.82	-12.94	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	24@0	-17.61	-17.05	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.47	-22.39	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@23	-20.85	-13.42	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	-15.82	-16.93	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	-9.82	-22.08	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	-22.8	-13.53	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	24@0	-17.17	-17.06	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	-10.69	-21.01	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@23	-20.53	-12.48	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	-15.58	-15.63	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	-10.21	-20.16	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	-20.66	-12.56	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	50@0	-18.09	-17.35	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-13.22	-22.97	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@50	-22.5	-13.67	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	-14.35	-14.2	see graph	PASS


48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-12.05	-21.55	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	-22.35	-13.66	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-16.82	-16.59	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.99	-18.41	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@50	-18.32	-12.98	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	-14.32	-14.54	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-11.06	-18.34	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	-19.35	-13.51	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	50@0	-16.38	-16.54	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.69	-18.46	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@50	-17.98	-12.67	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	-14.18	-14.55	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-11.49	-18.28	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	-17.54	-12.28	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	100@0	-15.08	-14.14	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-13.34	-15.66	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@105	-17.27	-14.25	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	-14.0	-13.15	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-12.88	-15.77	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	-16.8	-14.76	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-14.96	-14.32	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.27	-13.01	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-18.21	-14.54	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-13.76	-13.31	see graph	PASS

48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-12.98	-14.7	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	-18.09	-15.21	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	100@0	-13.94	-14.0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-13.17	-15.09	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@105	-17.17	-13.77	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	-13.03	-13.03	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-12.38	-14.27	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	-16.31	-13.76	see graph	PASS


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

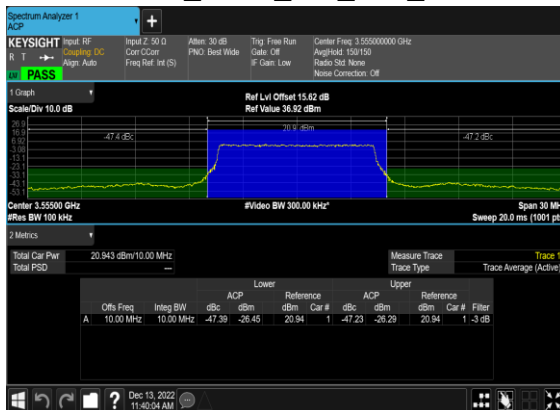


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

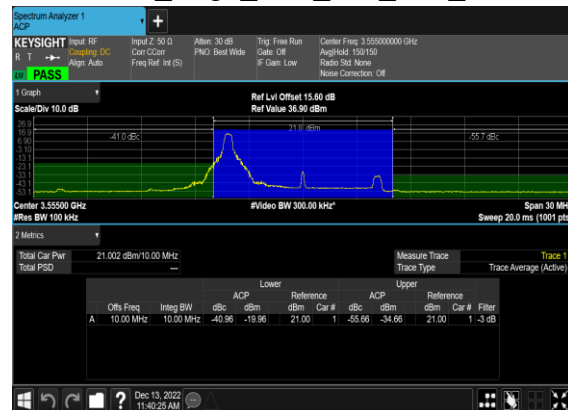


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

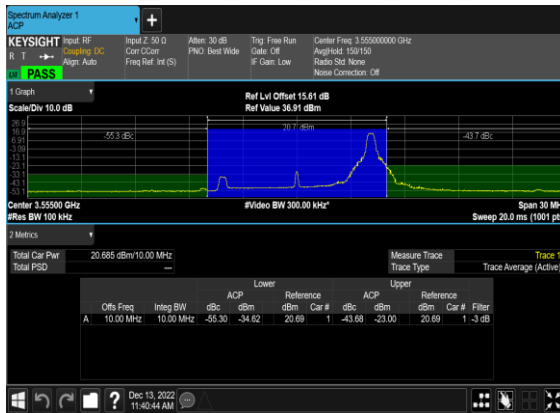


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

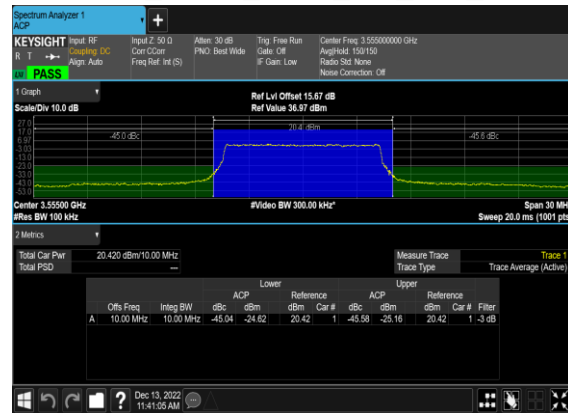


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

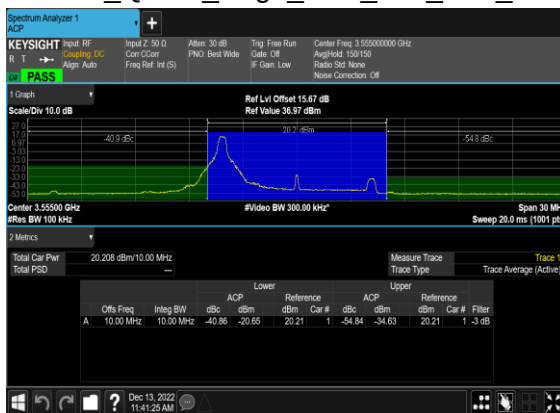


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

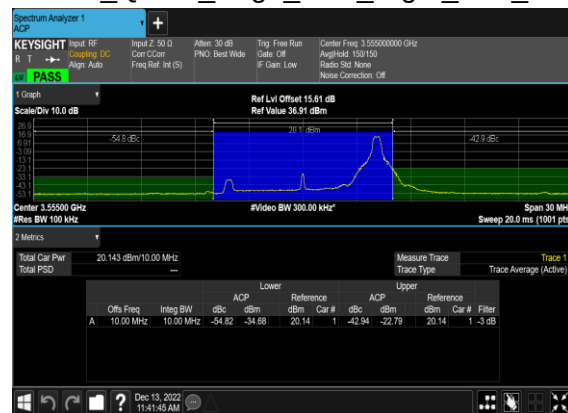


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

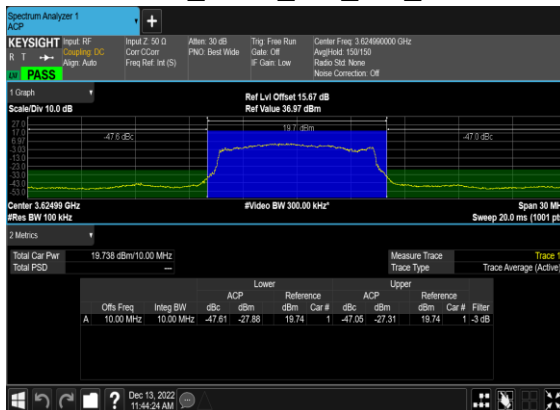


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

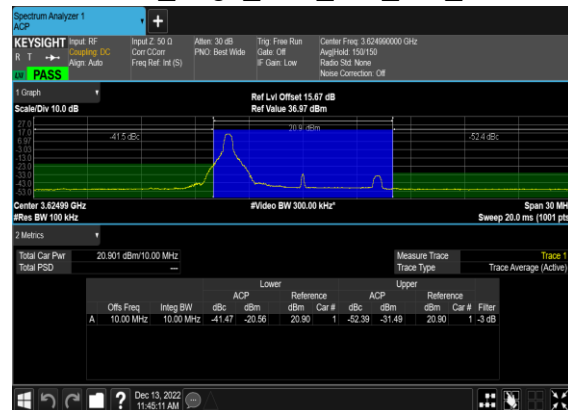


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

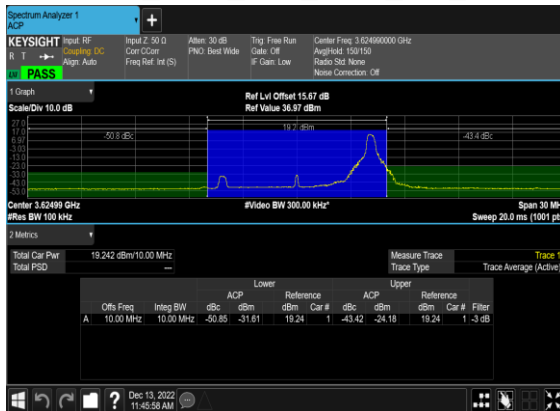


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

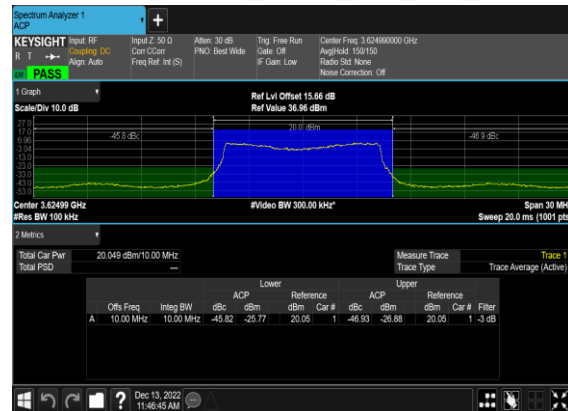


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

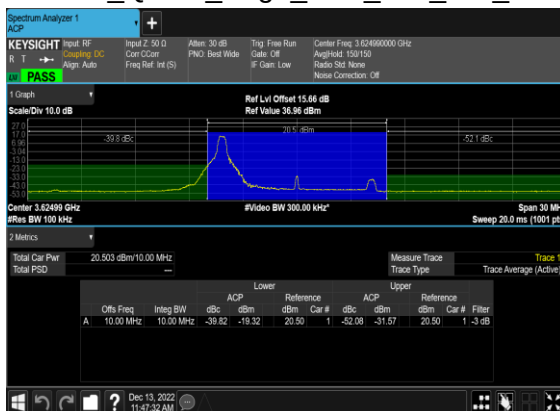


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

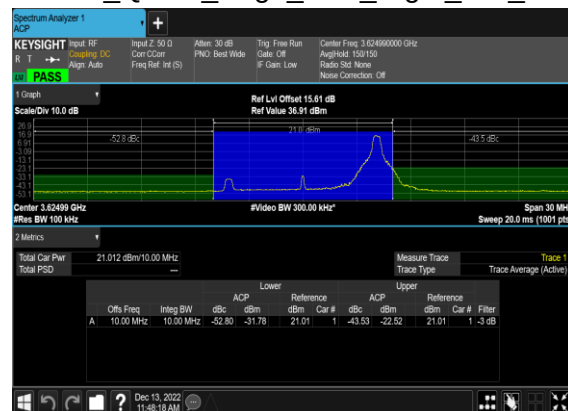


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

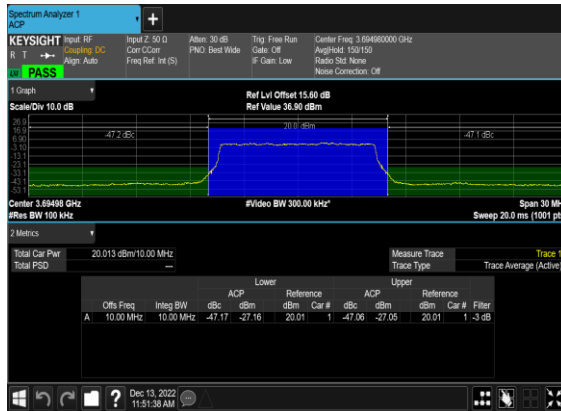


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

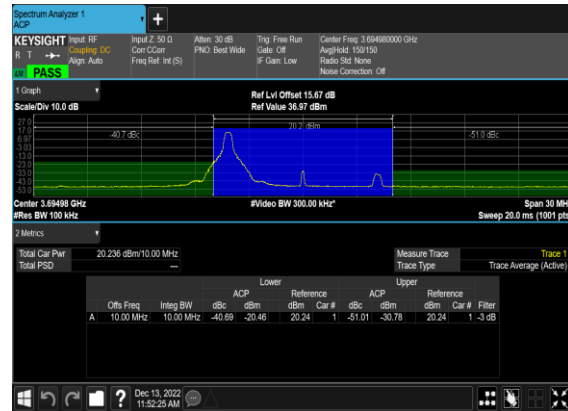


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

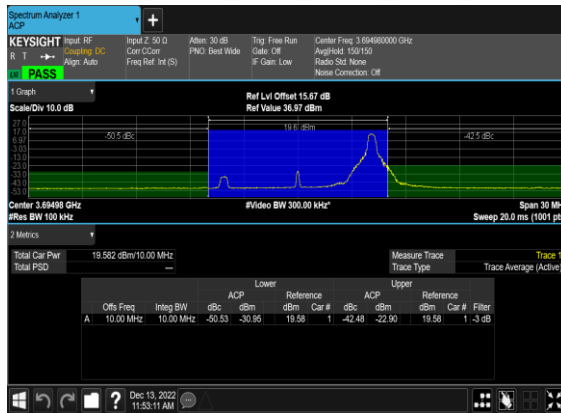


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

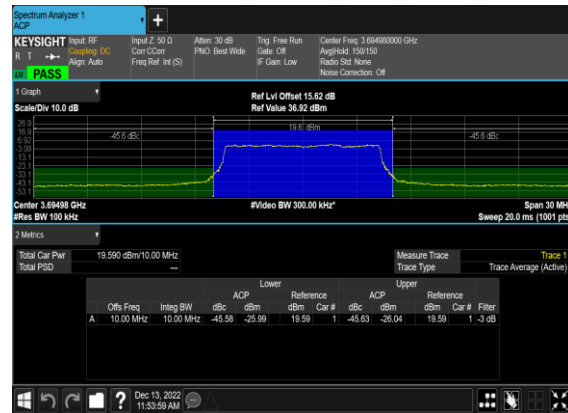


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

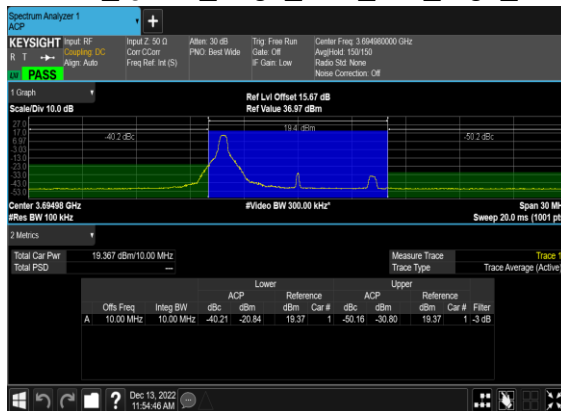


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

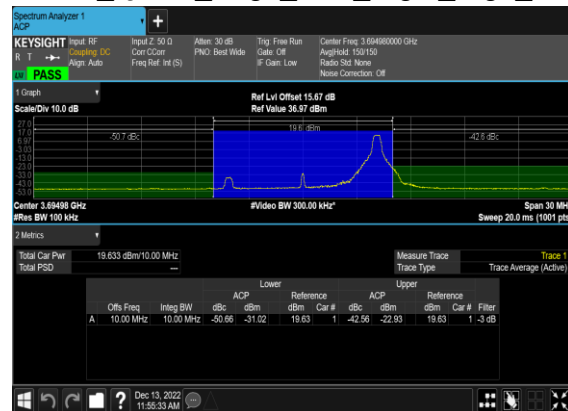


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

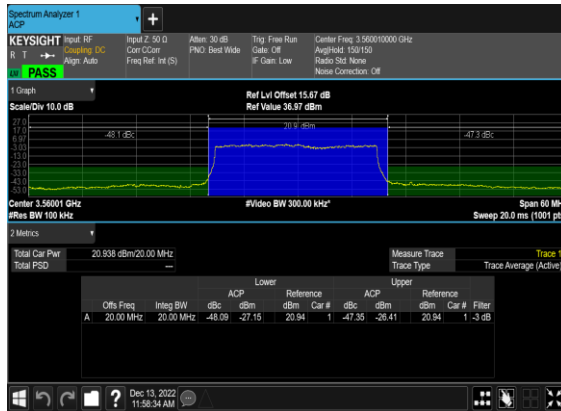


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

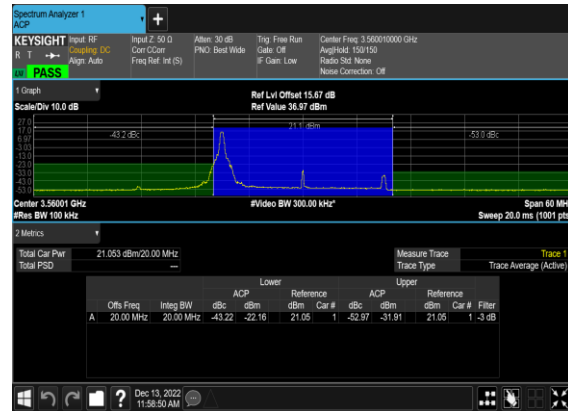


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

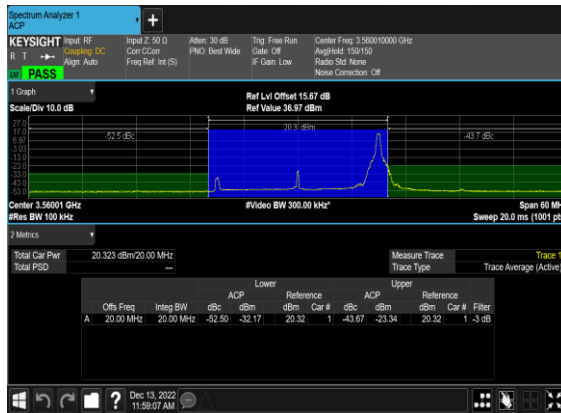


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

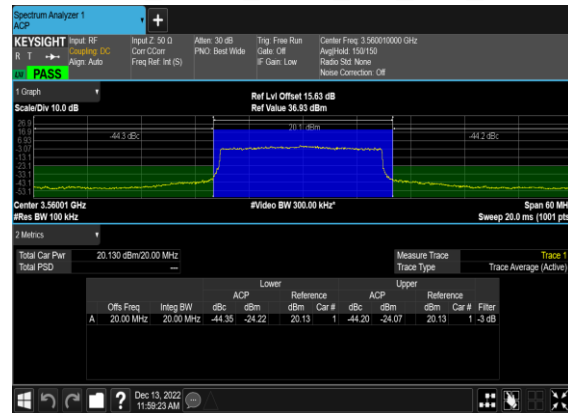


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

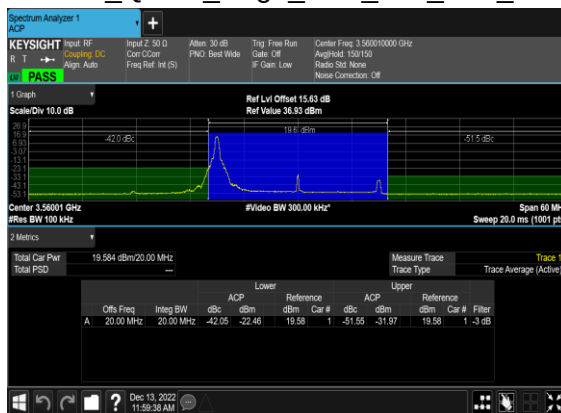


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

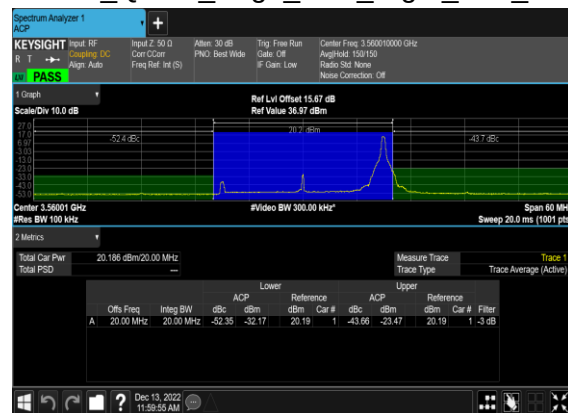


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

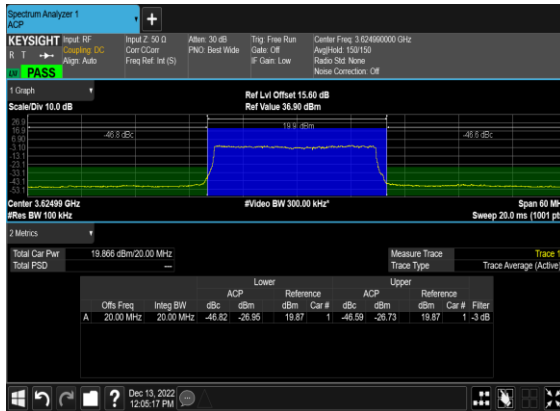


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

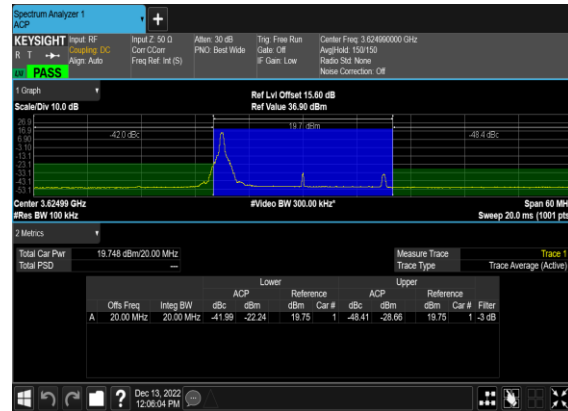


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

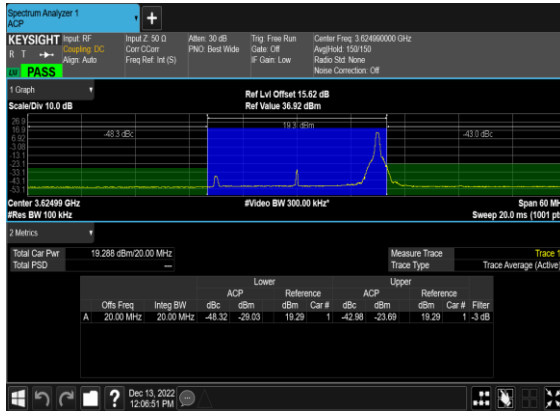


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

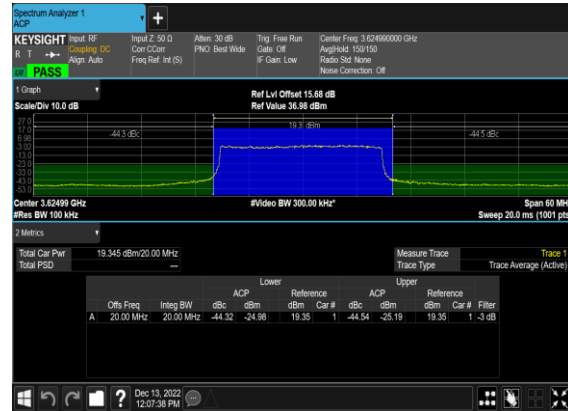


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

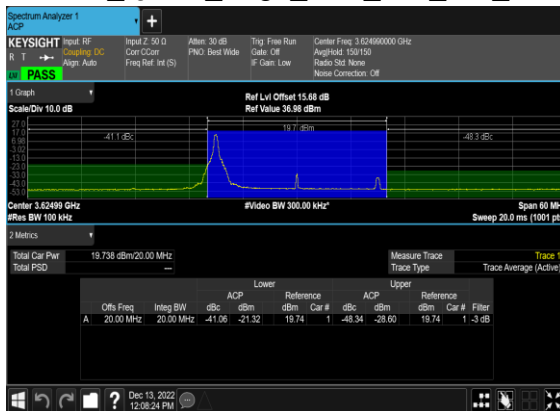


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

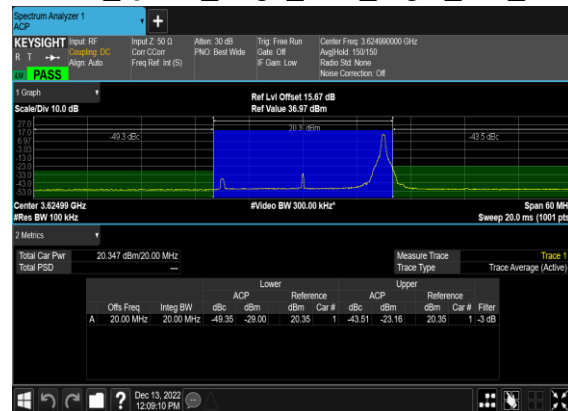


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

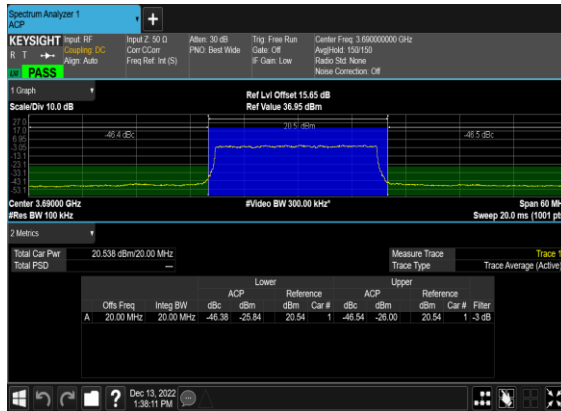


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

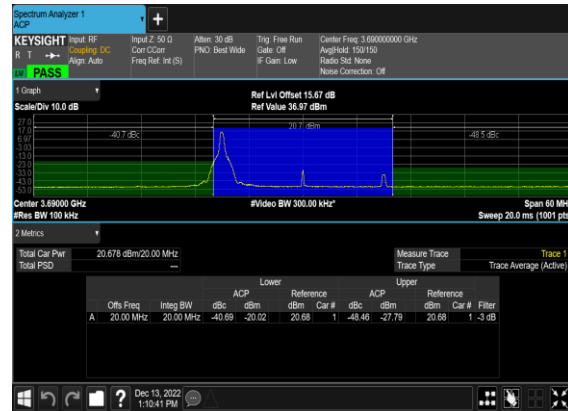


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

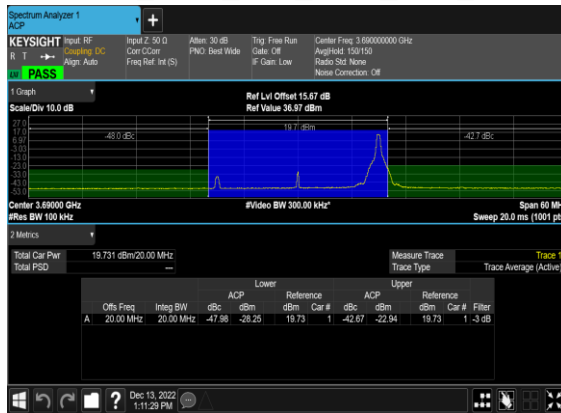


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

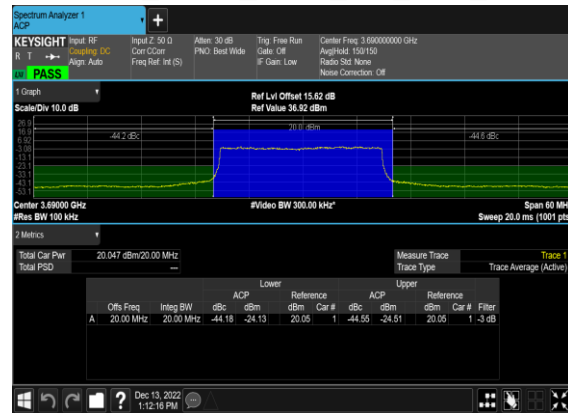


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

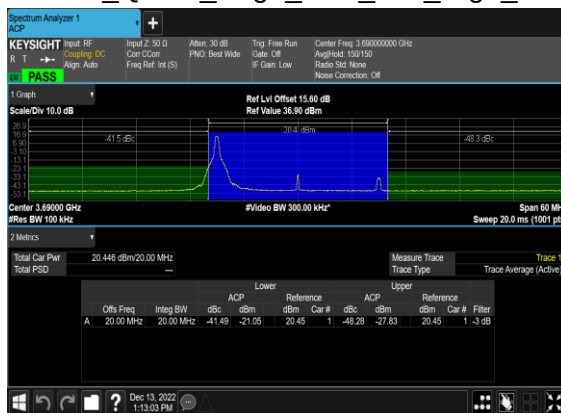


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

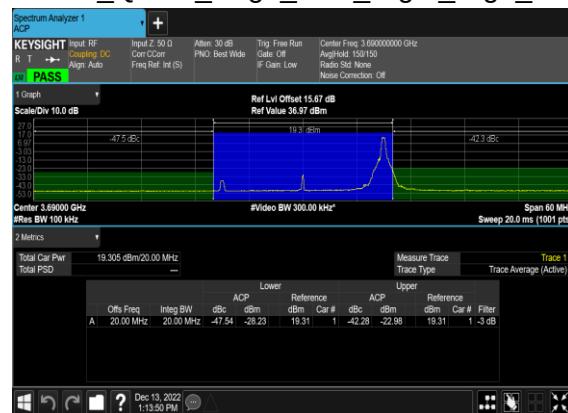

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

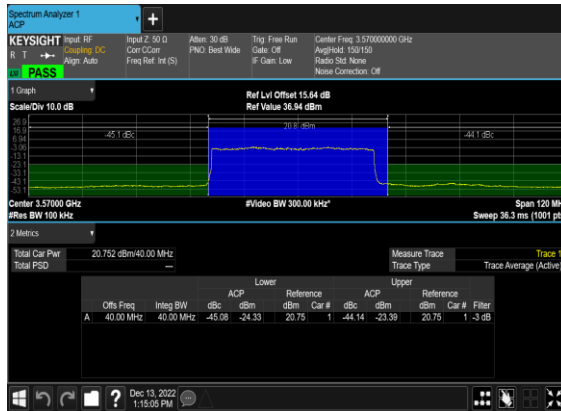


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

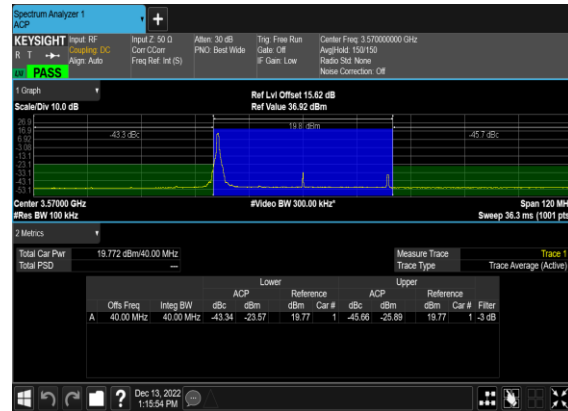


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH




N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

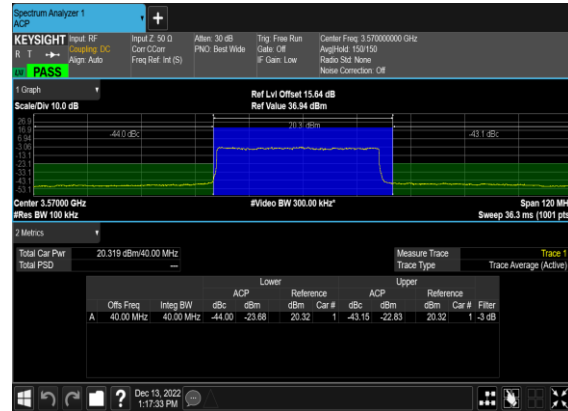


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

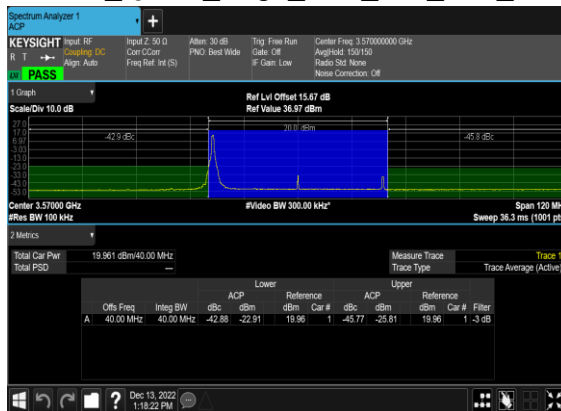


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

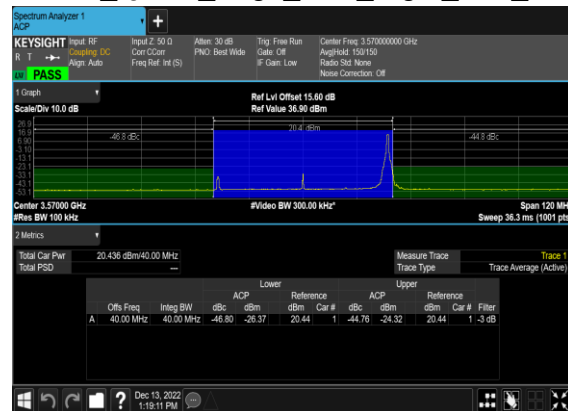

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

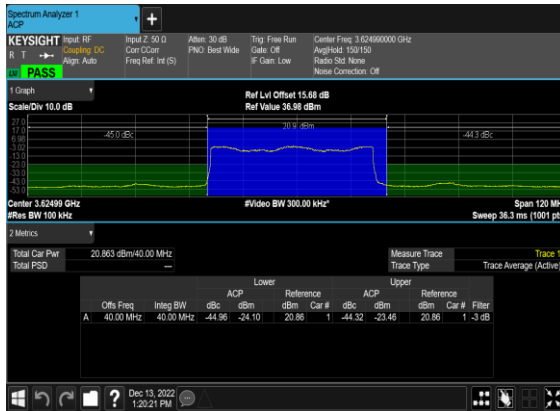

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

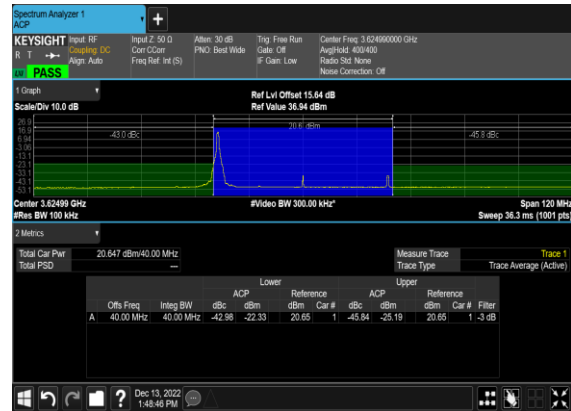


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH




N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

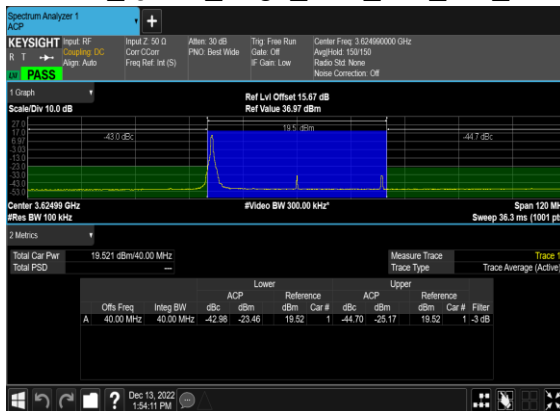


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

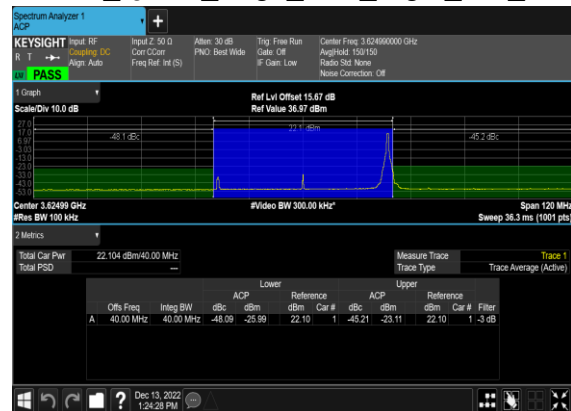


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

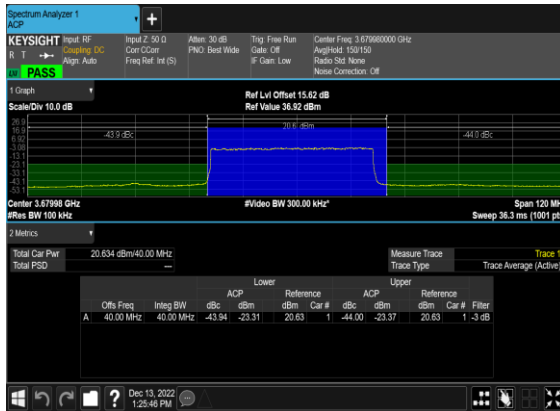


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

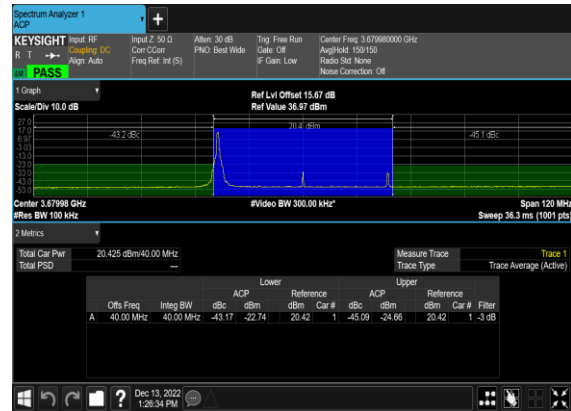


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

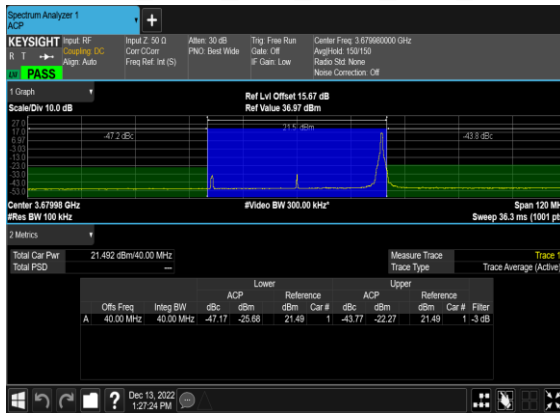


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

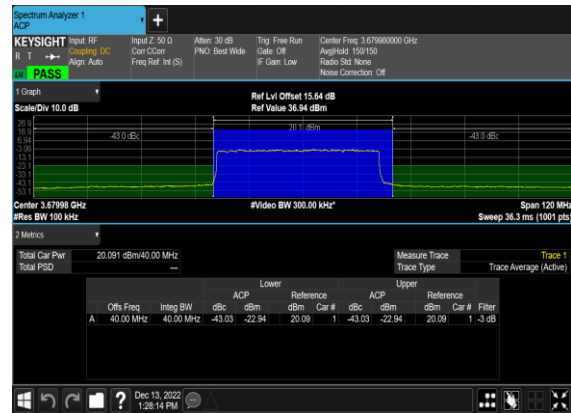

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

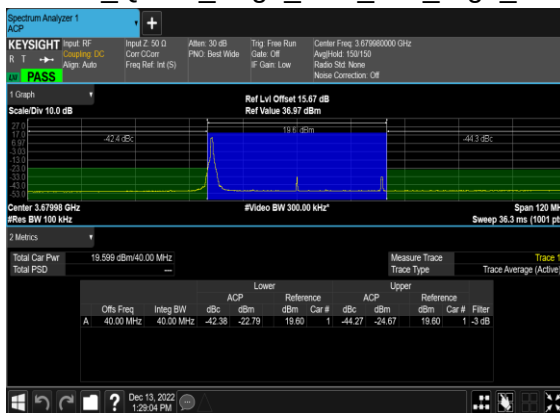

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

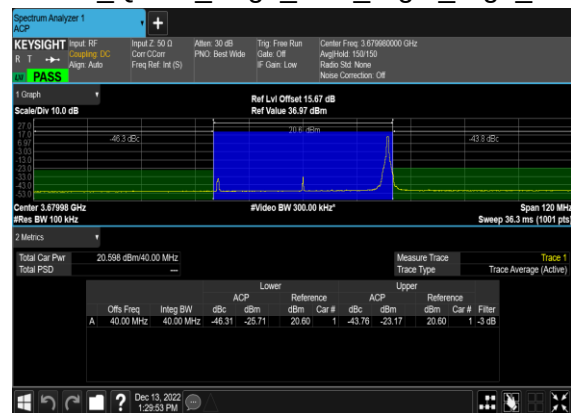

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@23	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	24@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---

48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@23	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	24@0	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@23	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	see graph	---

48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	24@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@50	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	50@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	see graph	---


48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@50	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	50@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---

48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@50	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	50@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@105	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	see graph	---


48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	100@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@105	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	100@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	see graph	---

48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@105	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	100@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	see graph	PASS


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

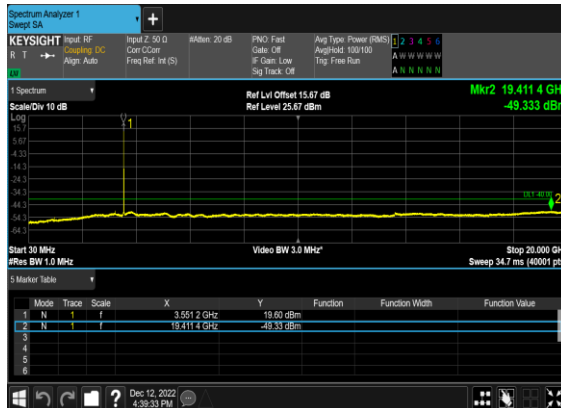


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

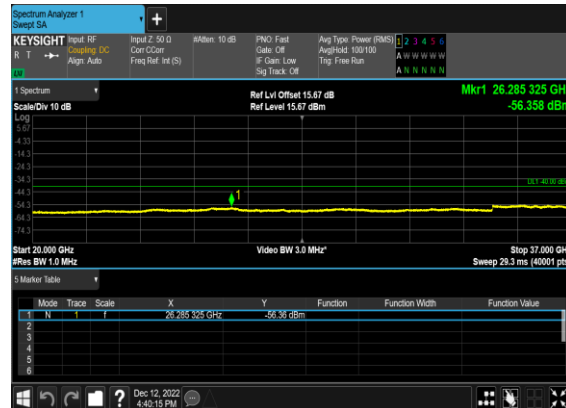


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

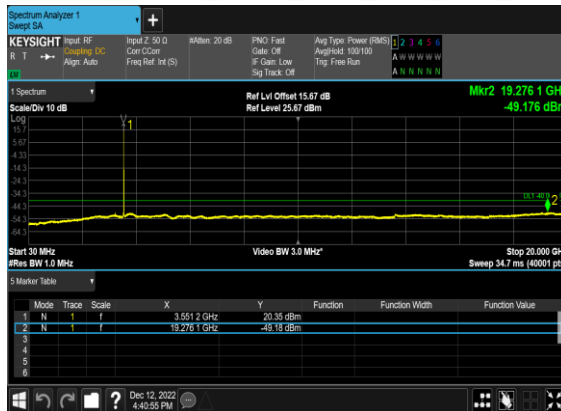


N48(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

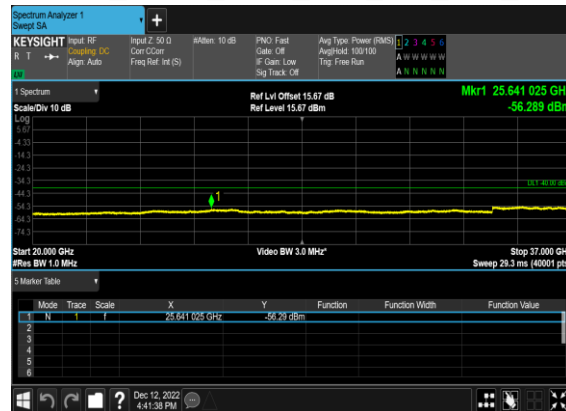


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Low_CH

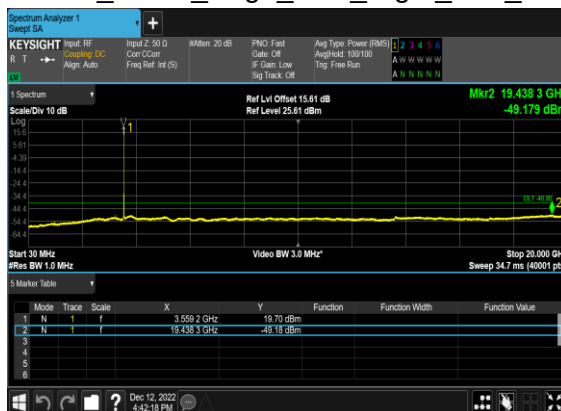


N48(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Low_CH

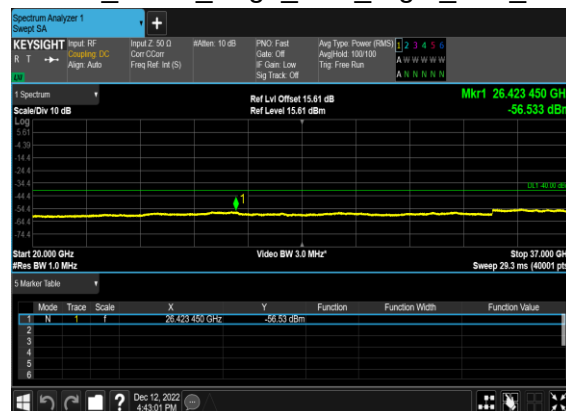


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

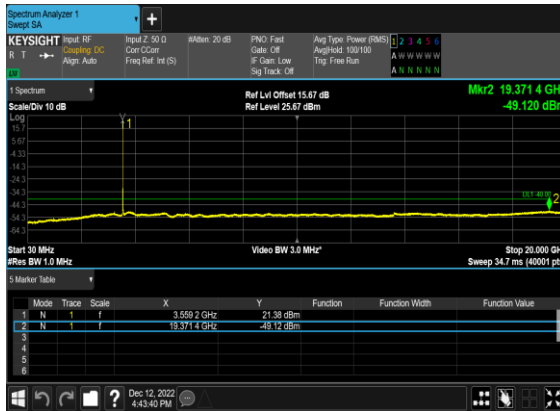


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

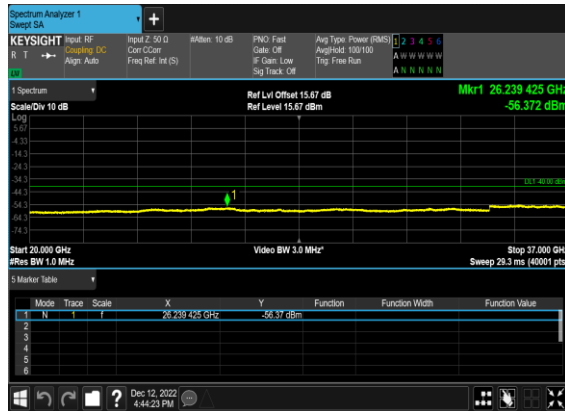


N48(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

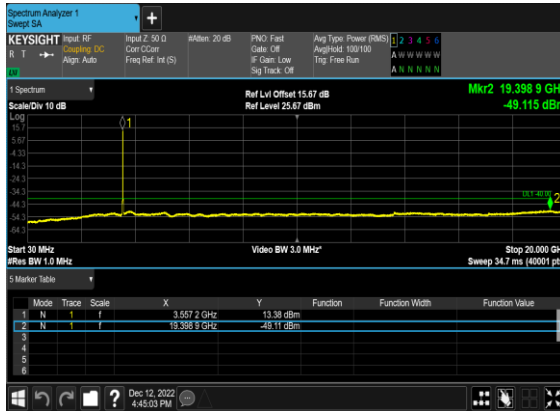


N48(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

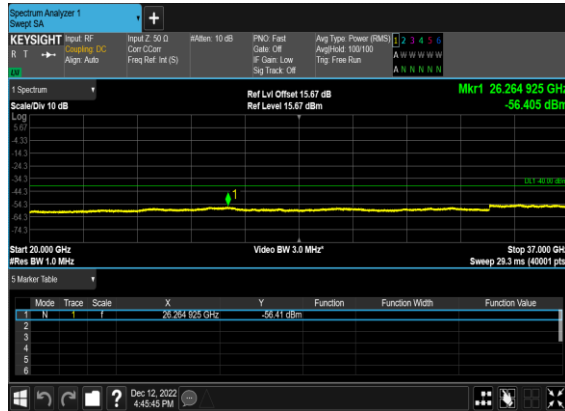

N48(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

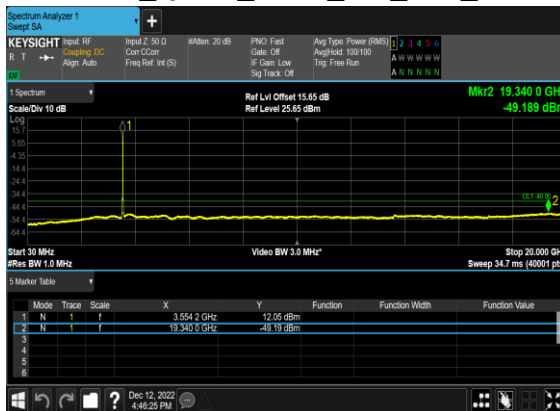


N48(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

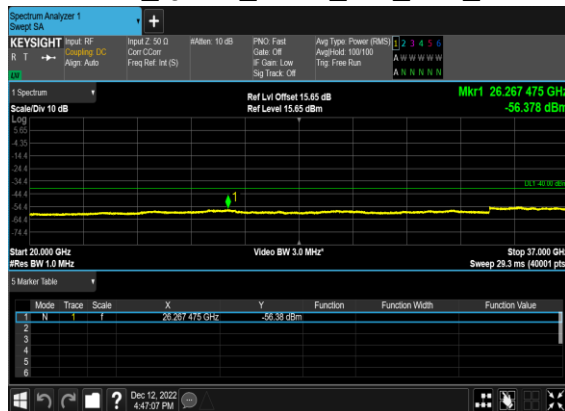


N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

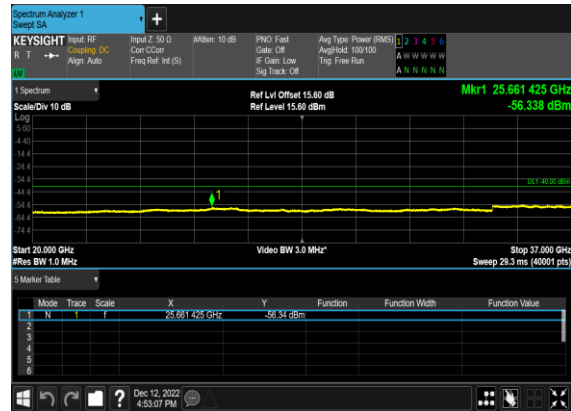


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

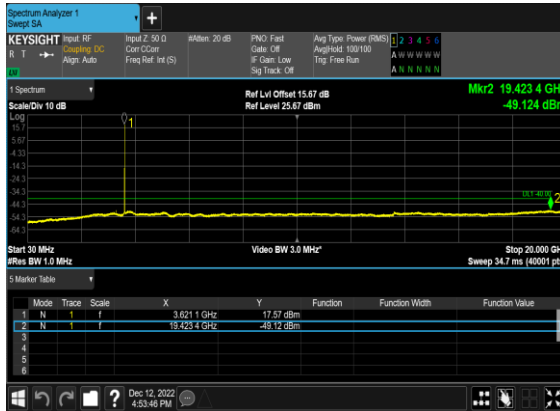

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

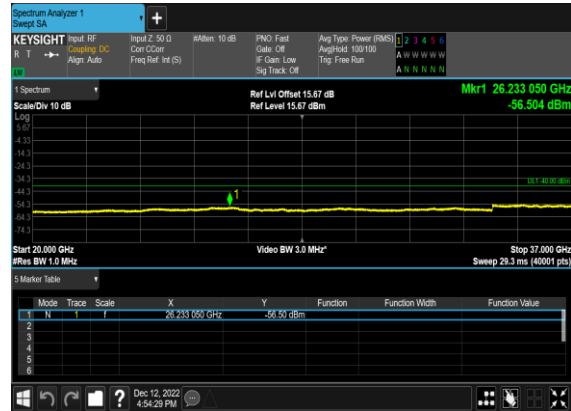

N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH

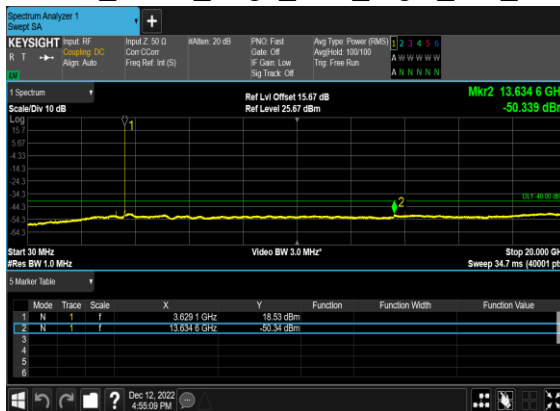

N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH

