

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Customer Name: Gadget Lab International Co., Ltd.

Product Name: 2.4G BT Antenna

Part NO.: CODY BLOCK.BT

Write By: Damon Cui

Issued Date: 2024.06.27

Customer

R&D Dept	Business Dept	Approved By

SKYLink

R&D Dept	Engineer Dept	Approval

● Specification Summary

A. Electrical Characteristics	
Frequency	2400MHz ~2500MHz
VSWR	<5.0
Efficiency	>10%
Peak Gain	-3.19dBi
Impedance	50 Ohm
Polarization	Line
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Cable Type	/
Connector Type	/
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions



1. Network Analyzers :

Agilent 8753D 5071B


Communications Test Set:

Agilent E5515C CMW500

2. 3D Chamber Test System

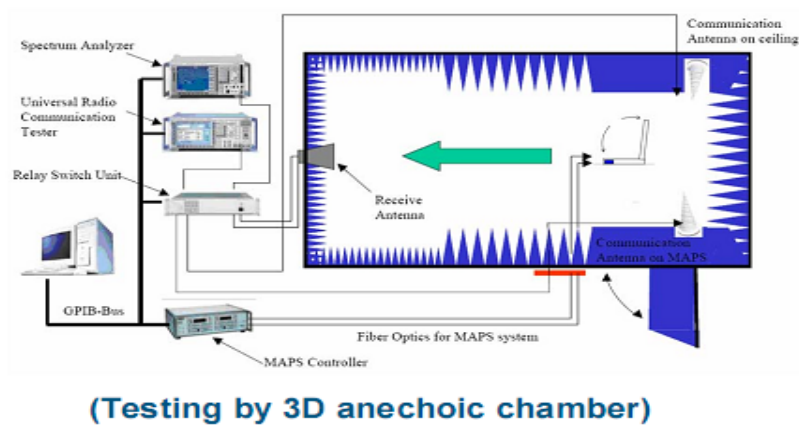


Phi axis test




Theta axis test



◆ Return Loss

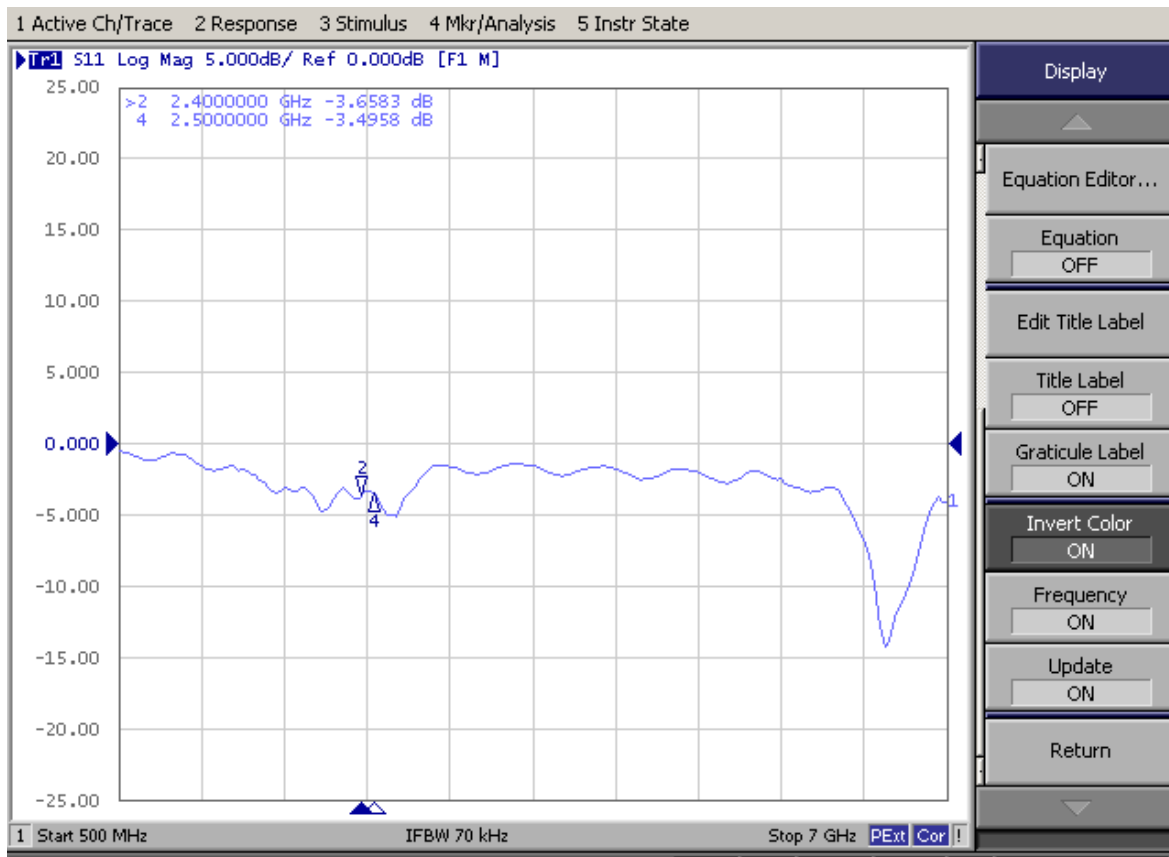

◆ VSWR

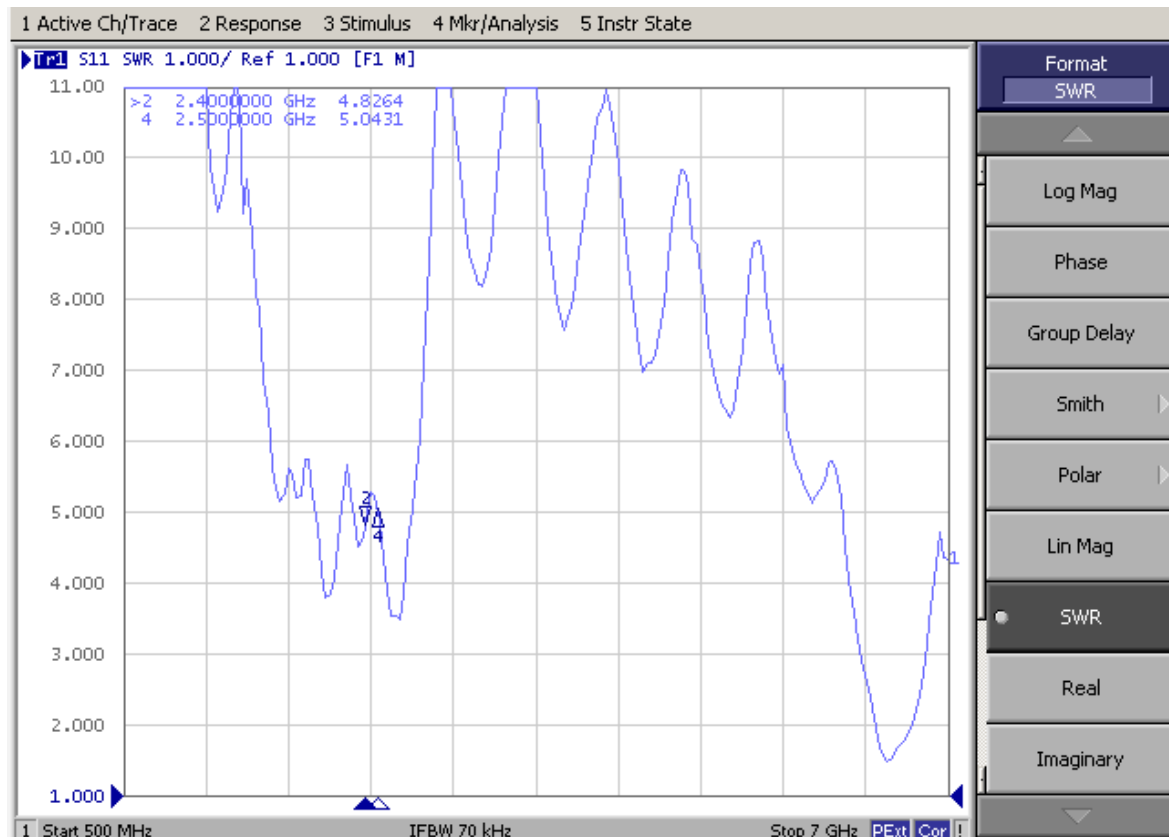


◆ Gain & Efficiency


Freq (MHz)	Effi (%)	Gain (dBi)
2400	21.94	-3.19
2410	19.31	-3.56
2420	19.81	-3.29
2430	18.78	-3.35
2440	19.07	-3.24
2450	15.84	-4.04
2460	15.28	-4.15
2470	15.16	-4.23
2480	16.84	-3.91
2490	17.73	-3.96
2500	16.48	-4.65

◆ Radiation Patter


2400.000MHz

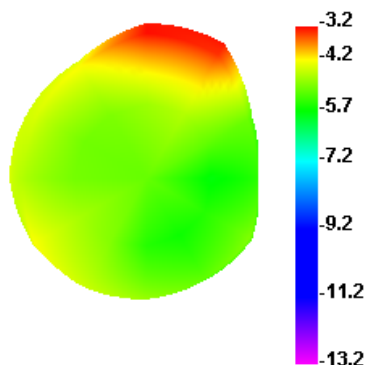


2400.000MHz H

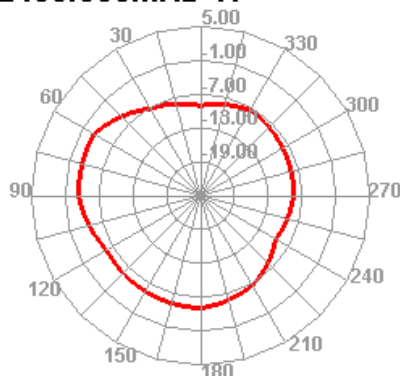


2400.000MHz E1

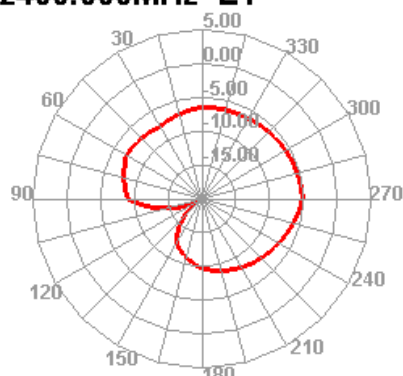


2400.000MHz E2

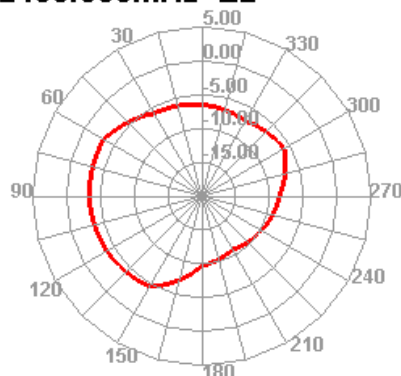


2450.000MHz

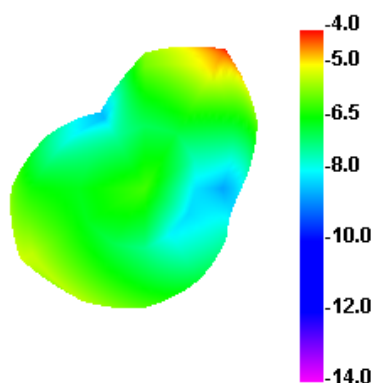


2450.000MHz H

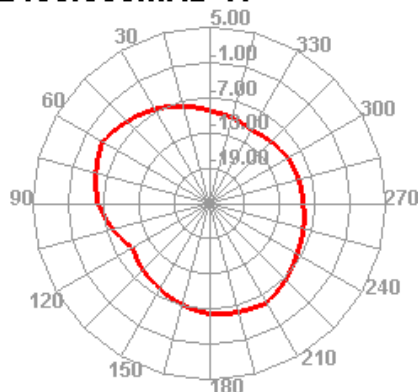


2450.000MHz E1

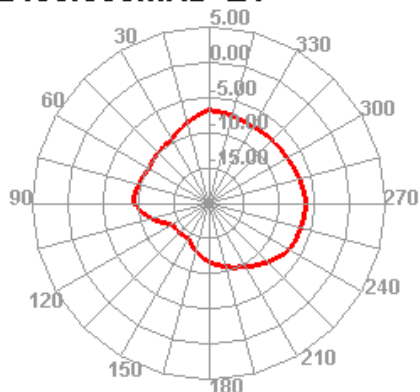


2450.000MHz E2

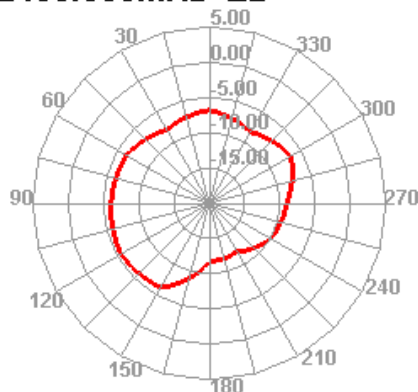


2500.000MHz

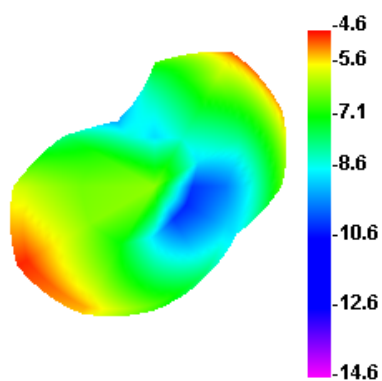


2500.000MHz H

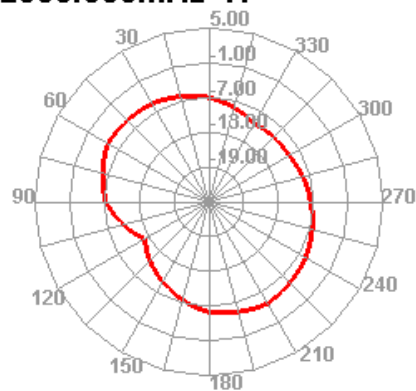


2500.000MHz E1

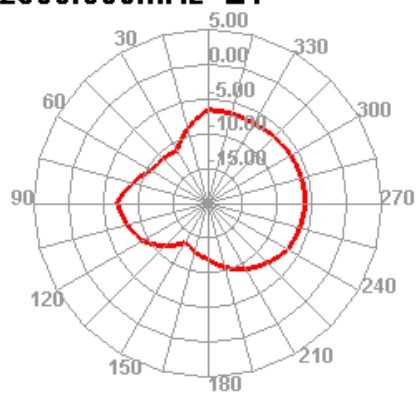

2500.000MHz E2

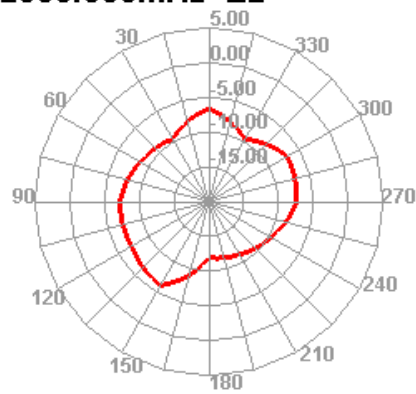

◆ Antenna Picture

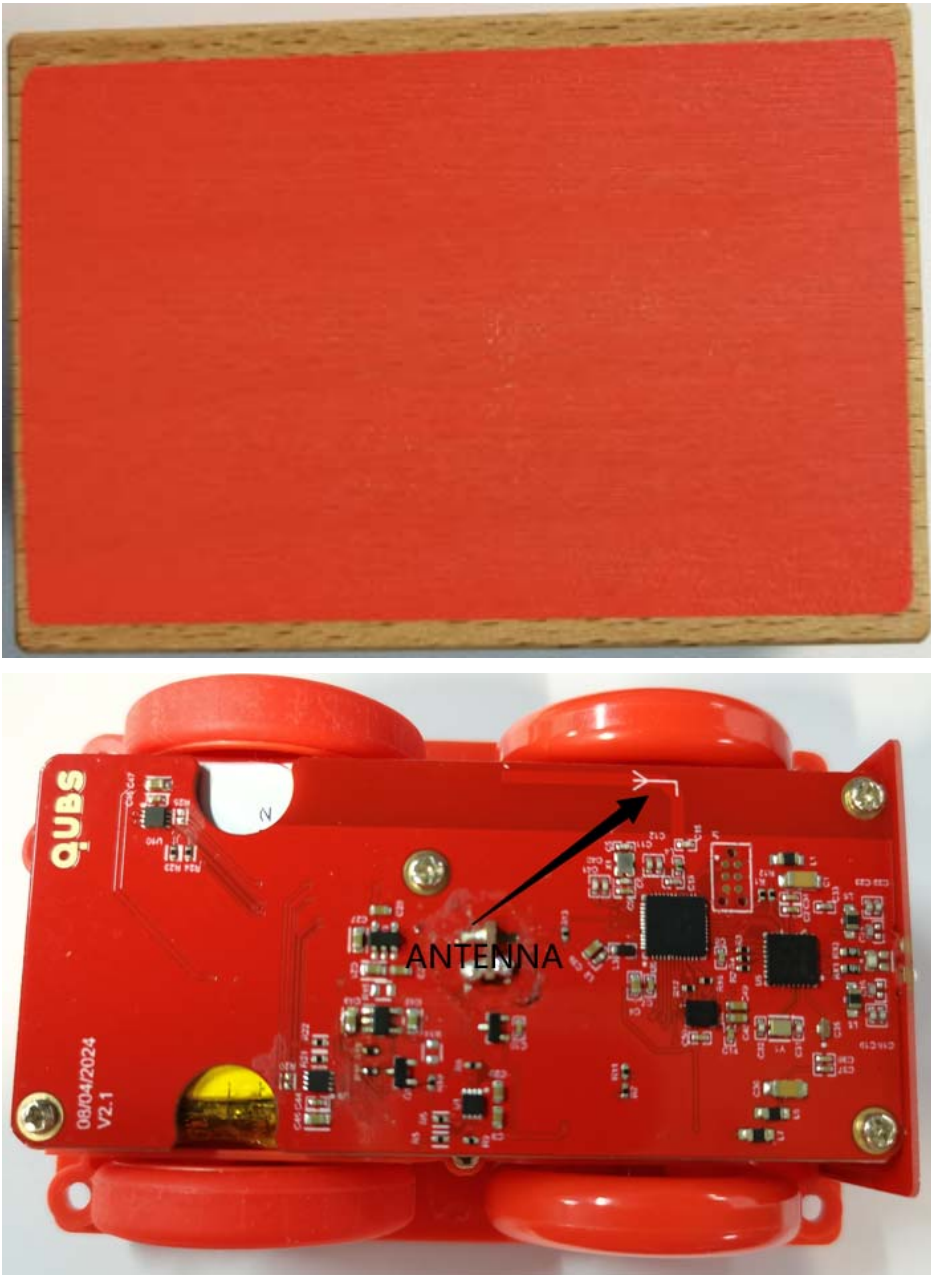

◆ Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: 35±2℃ Humidity: 85% NaCl salt spray :5 ±1 %.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS